Integrated Library Management System

Complete illustrated user manual

24 October 2026 | 24 sections | Screenshots and operator instructions

RBCET / RBMI Central Library
RBCP Library
RBCN Library
RBGN Library

Live: https://rbmi-ilms.vercel.app
Administrator: rahul.r@rbmi.in

Screenshots use sample records and contain no real credentials. Screen pages use landscape orientation for legibility. Figures show controls; use the numbered instructions to complete each task.

Contents

01 / Start here and library directory 3

02 / Accounts and role permissions 6

03 / Change or recover a password 8

04 / Overview and the daily desk routine 11

05 / Librarian availability and fine-free days 13

06 / Patrons, faculty and institute assignments 15

07 / Bulk uploads and the supplied Excel import 18

08 / Bibliographic records, copies and barcodes 22

09 / MARC book migration 24

10 / Issue, return and renewal 26

11 / Holds and reservation priority 31

12 / Fine rules, payments and waivers 34

13 / Acquisitions, budgets, funds and baskets 37

14 / Authority control 40

15 / Private and public reading lists 43

16 / Serial subscriptions and receiving 45

17 / Advanced catalogue and item search 48

18 / Public catalogue and temporary cart 50

19 / Stock verification 52

20 / Reports and saved definitions 55

21 / Administration and audit trail 59

22 / Developer installation and deployment 63

23 / Backup, restore and private handover 65

24 / Troubleshooting and Koha coverage limits 67

01 / Start here and library directory

Open https://rbmi-ilms.vercel.app in a current browser. RBMI ILMS 2.0 uses React, shared Supabase PostgreSQL and Supabase email/password authentication. GitHub and hosting dashboard accounts are separate from library sign-in accounts.

How to use this section

1. Sign in with your registered email and private password. Verify that the connection indicator says Supabase connected.

2. Select RBCET for the shared RBCET / RBMI Central Library, RBCP for Pharmacy, RBCN for Nursing, or RBGN for its separate library. RBMI is a campus in the shared library, not another issue desk.

3. The single network administrator is rahul.r@rbmi.in and manages all four libraries. Nidhi Dewal, nidhi@rbmi.in, serves RBCET/RBMI. Rekha, rekha@rbmi.in, serves RBCP. Sheeba, sheeba@rbmi.in, serves RBCN. Raveena, raveena@rbmi.in, serves RBGN.

4. Use the sidebar modules. On a phone open the navigation menu. Refresh data to see a colleague's recent changes. Sign out before leaving a shared computer.


Notes and limits

A yellow Sample data banner means an isolated browser demonstration with fictional records. Live staff must use the Supabase-connected deployment.

New accounts receive a one-use invitation email and choose their own private password. A patron card number is not a password. Existing passwords are retained.


01.1 / Start here and library directory

Sign in with the registered email and password. The public catalogue link is available without signing in. (Sample workspace)

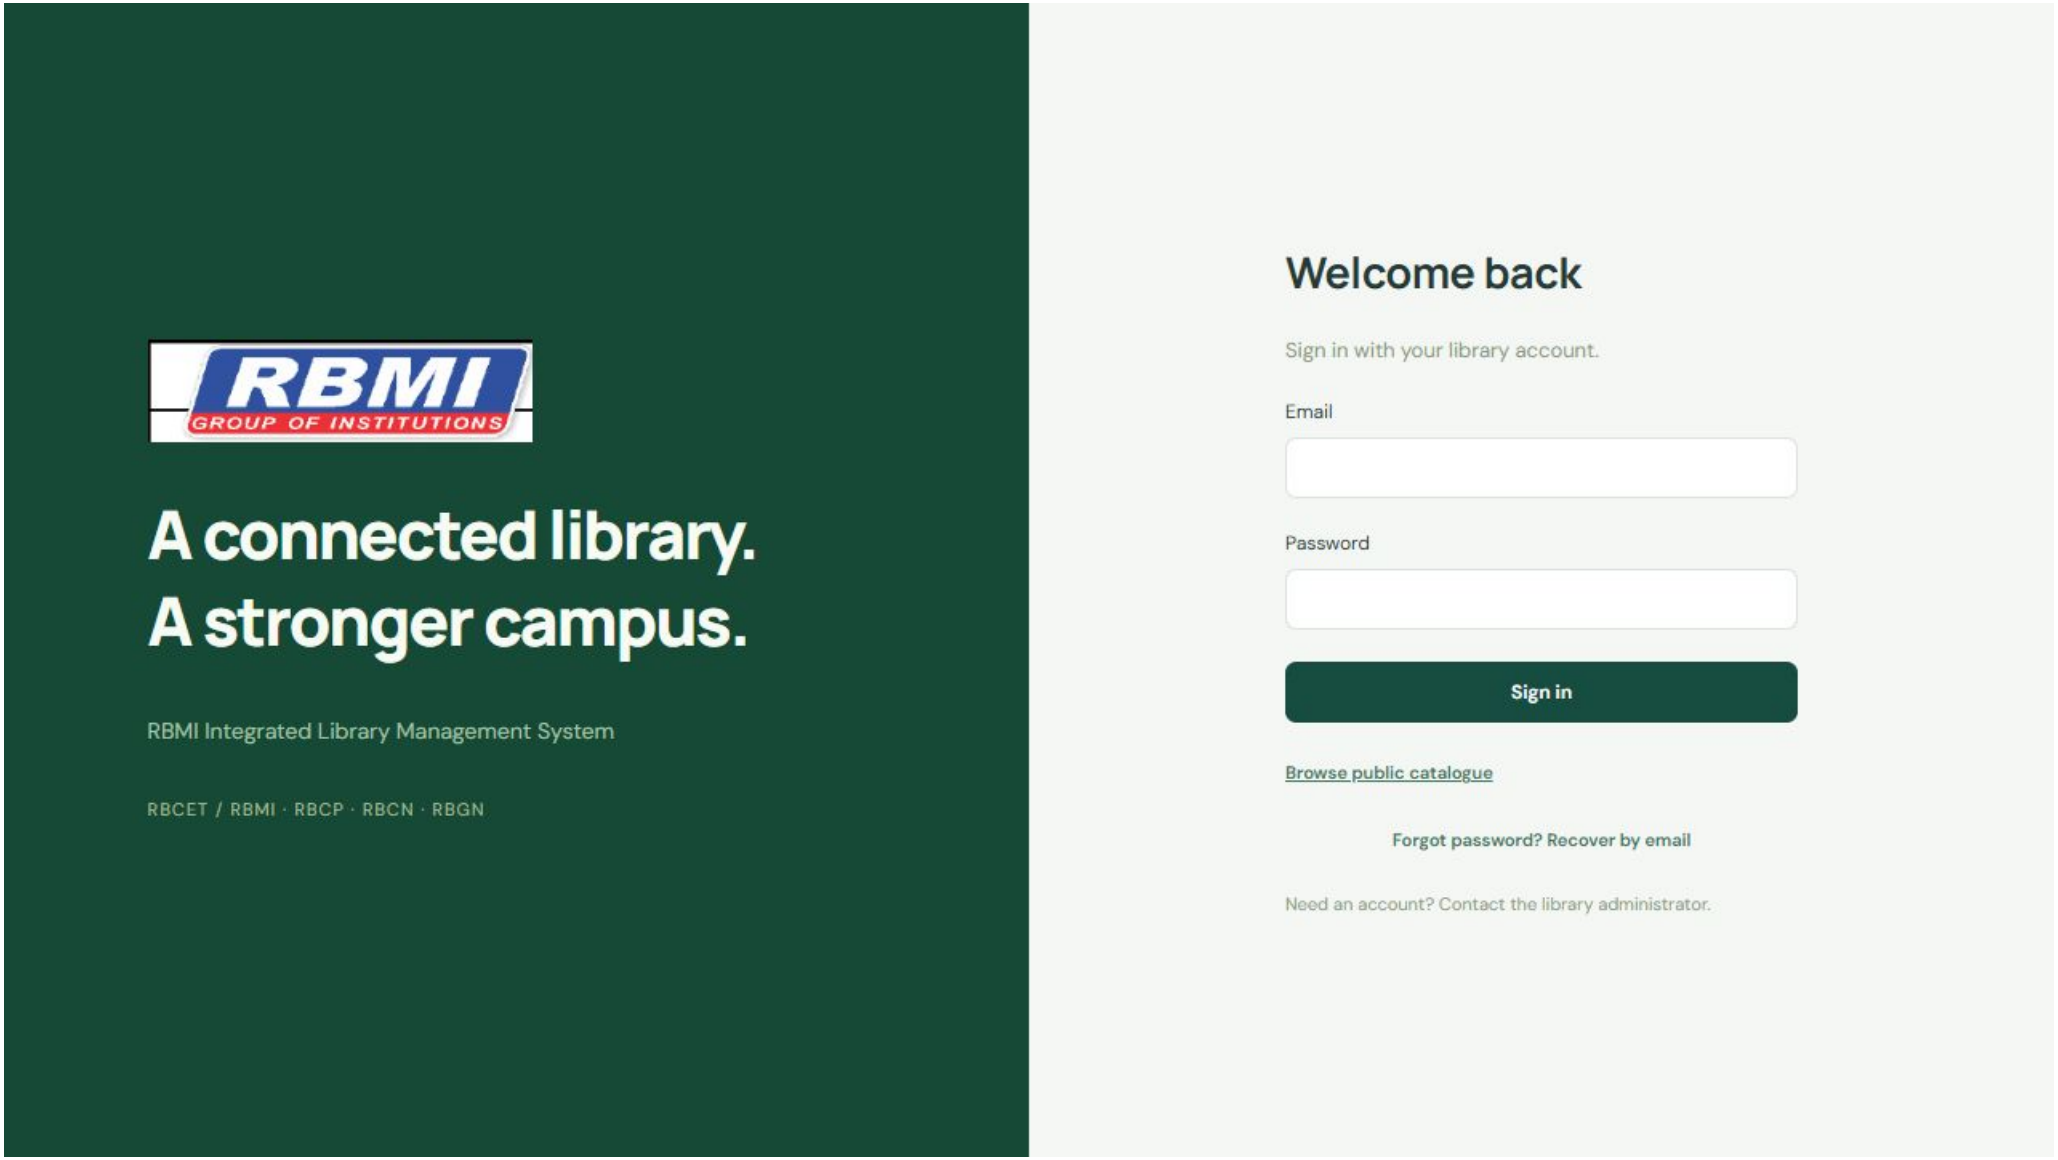

01.2 / Start here and library directory

Use the library selector at the top. RBGN is an independent library; RBCET and RBMI share the central library. (Sample workspace)

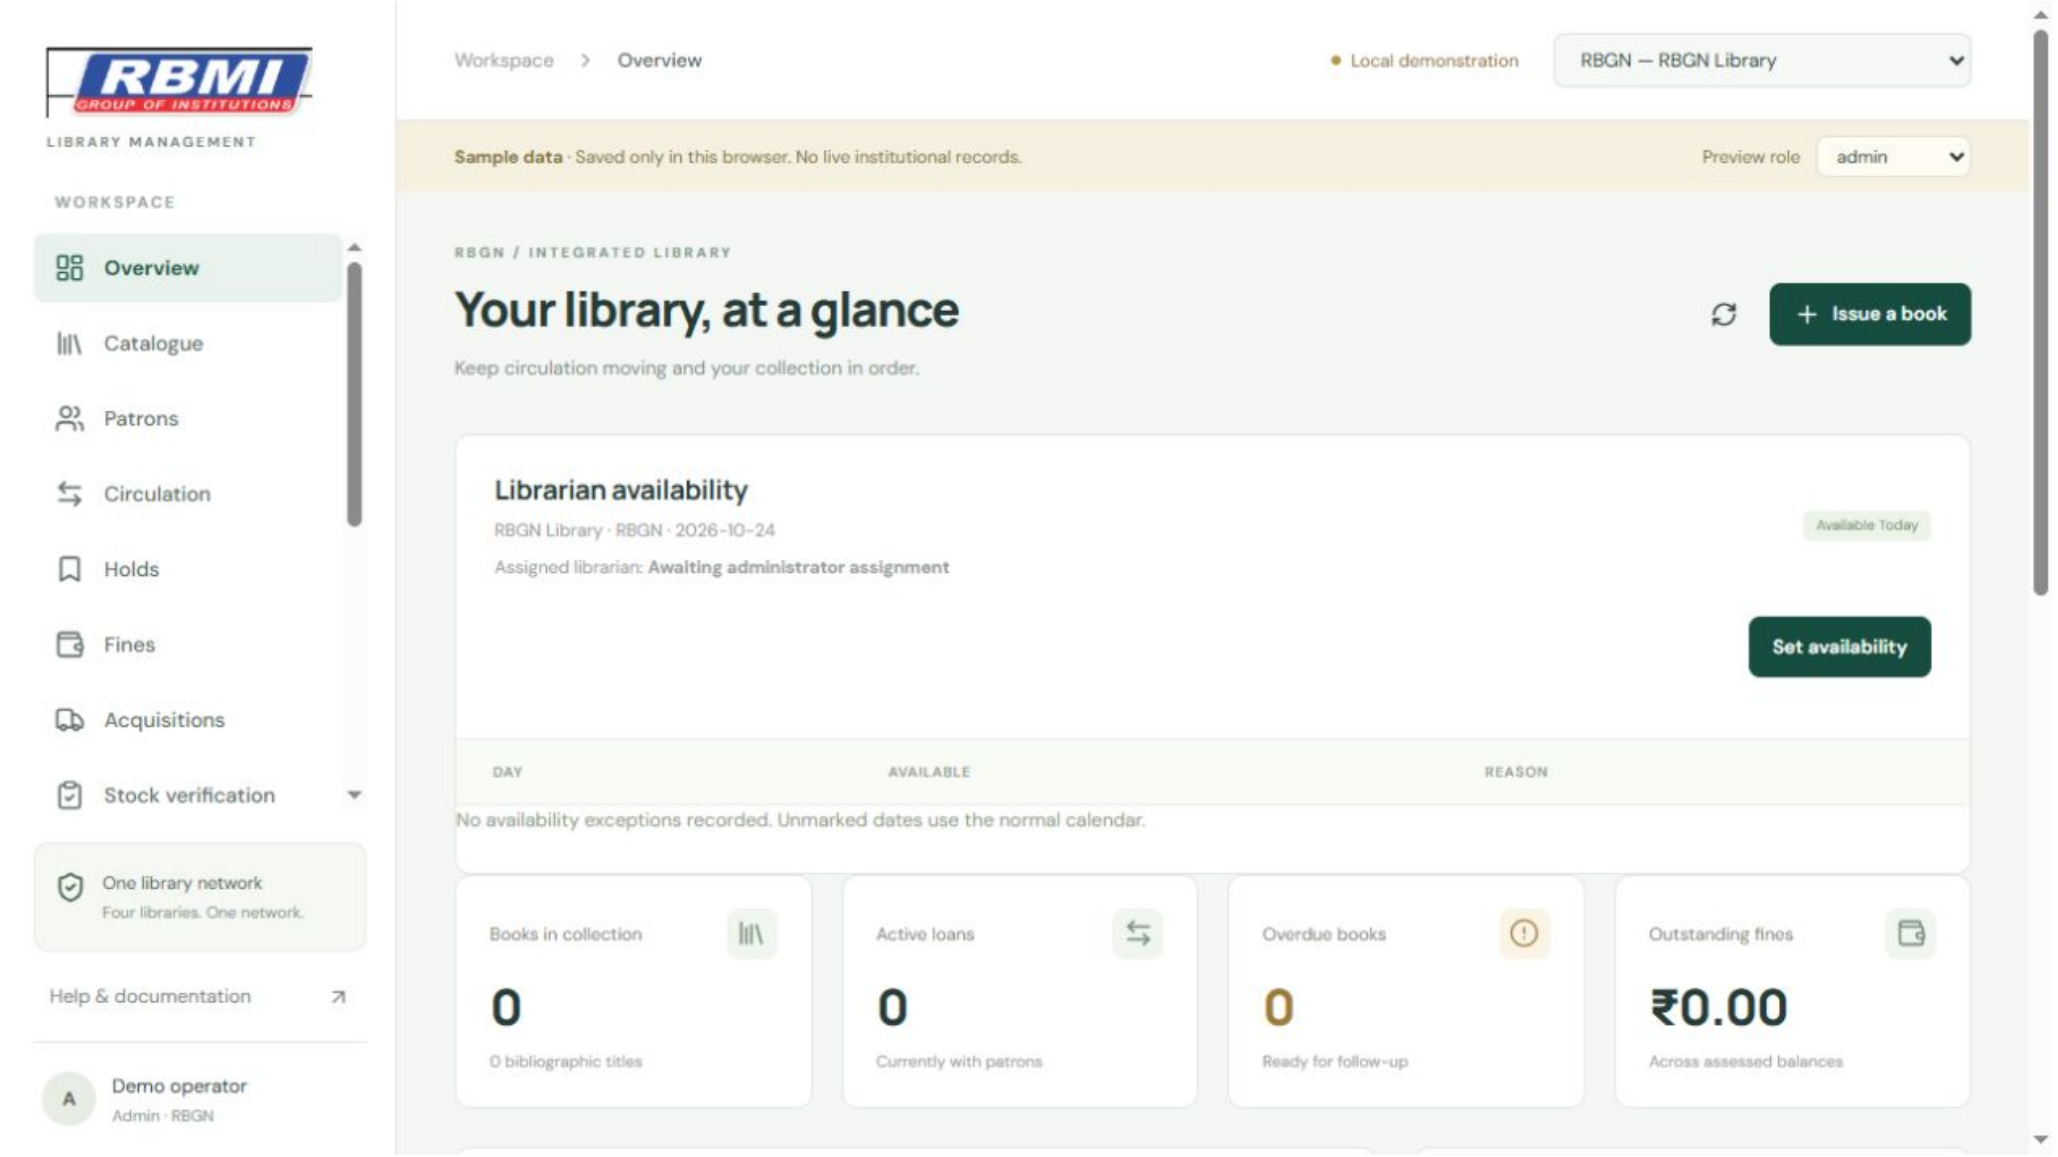

02 / Accounts and role permissions

Permissions are enforced by the database using memberships and designated librarian assignments. Editable user profile metadata is never used to grant access.

How to use this section

1. Admin manages all libraries, policies, accounts, assignments and audit records. The system permits one network administrator.

2. A librarian manages the assigned library's catalogue, patrons, circulation, fines, availability, acquisitions, authorities and serials. Each library has a distinct primary librarian.

3. Assistant operates circulation and holds. Accountant records payments and waivers. Auditor reads records and reports. Staff access is limited to assigned libraries.

4. Patron sign-ins must be linked to a patron UUID. They see the catalogue and their own loans, holds and fines, and can renew their own loans or manage their own holds.

5. Admin opens Settings > Accounts to create staff, update non-admin email addresses or send recovery messages. Sensitive actions require the administrator's current password.

6. To provision a patron sign-in, create its email/password identity in Supabase Auth, then assign patron role with the linked patron UUID in Institution access.

Notes and limits


The create-account form supports librarian, assistant, accountant and auditor roles. Library records and Auth users are separate entities.

Retained sample accounts ending in .invalid cannot receive recovery emails. Replace them with real individual accounts before operational use.

Imported students and faculty receive the Patron role linked to their own borrowing record, never a librarian or administrator role. Existing staff logins are not automatically linked by matching email.

02.1 / Accounts and role permissions

Settings contains the librarian assignment and access controls. Only the administrator manages roles and holiday calendars. (Sample workspace)

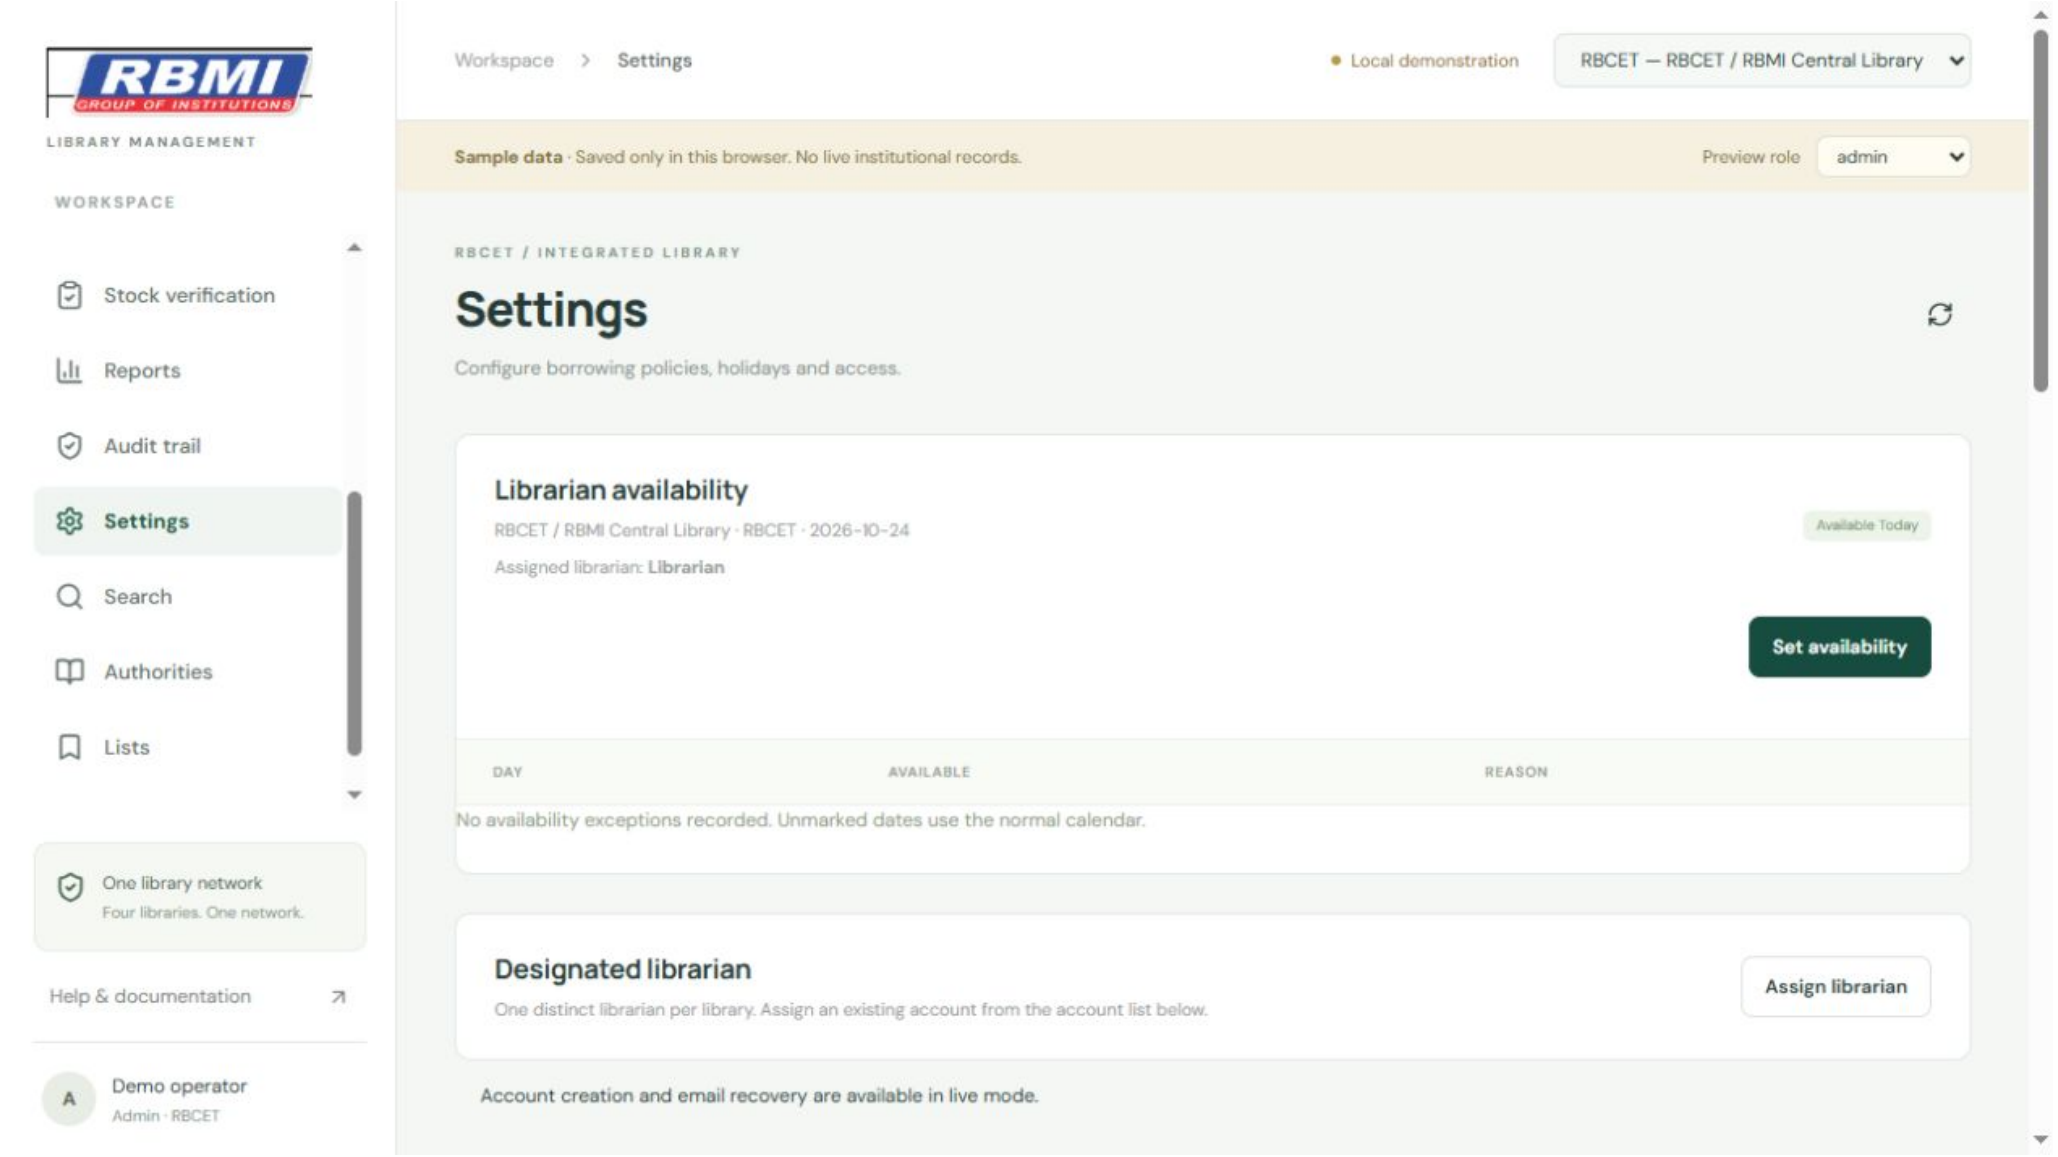

03 / Change or recover a password

Email recovery is available to every role, including the administrator, through Supabase Auth and the configured SMTP service.

How to use this section

1. For a newly invited student, faculty member or staff member, open the invitation email and choose your own strong password. No default password is created or emailed. Save, then sign in again using your email and chosen password.

2. When signed in, select Change my password. Enter the current password, a different new password and matching confirmation.

3. When unable to sign in, choose Forgot password? Recover by email. Enter the registered address and check inbox and spam folders.

4. Open the newest recovery link. Continue securely if prompted, then enter and save a matching new password. Successful recovery signs you out; sign in with the new password.

5. Use 12 to 128 characters, including uppercase, lowercase, a number and a symbol. Choose a unique password for each person.

6. Admin may reset another assigned account in Settings > Institution access after verifying the person's identity and entering the administrator password. Share the temporary password privately and ask the person to change it.

7. For an expired, incomplete or previously used link, request a new email. Ask admin to correct a wrong registered email.

8. Administrator: open Settings > Administrator two-step verification, select Set up authenticator, scan the private QR code, and enter its current six-digit code. Select Verify and enable protection. Future administrator sessions must verify the second factor before records or account tools can be accessed.

Notes and limits


Staff cannot reset the administrator; the administrator recovers through their own registered email.

Old passwords cannot be read from Supabase. Passwords are excluded from audit records, GitHub and public source downloads. An initial-password file becomes stale after users change their passwords.

Pending password setup is enforced by the database. Legacy accounts that still have an initial password use the current-password form shown in the screenshot. New invitation accounts do not need an initial password. An expired setup invitation can be resent by the librarian from import results, or by the administrator through account recovery.


03.1 / Change or recover a password

Legacy initial-password setup is shown here. New invitation users choose their own password without an initial-password field; existing account passwords remain unchanged. (Sample workspace)

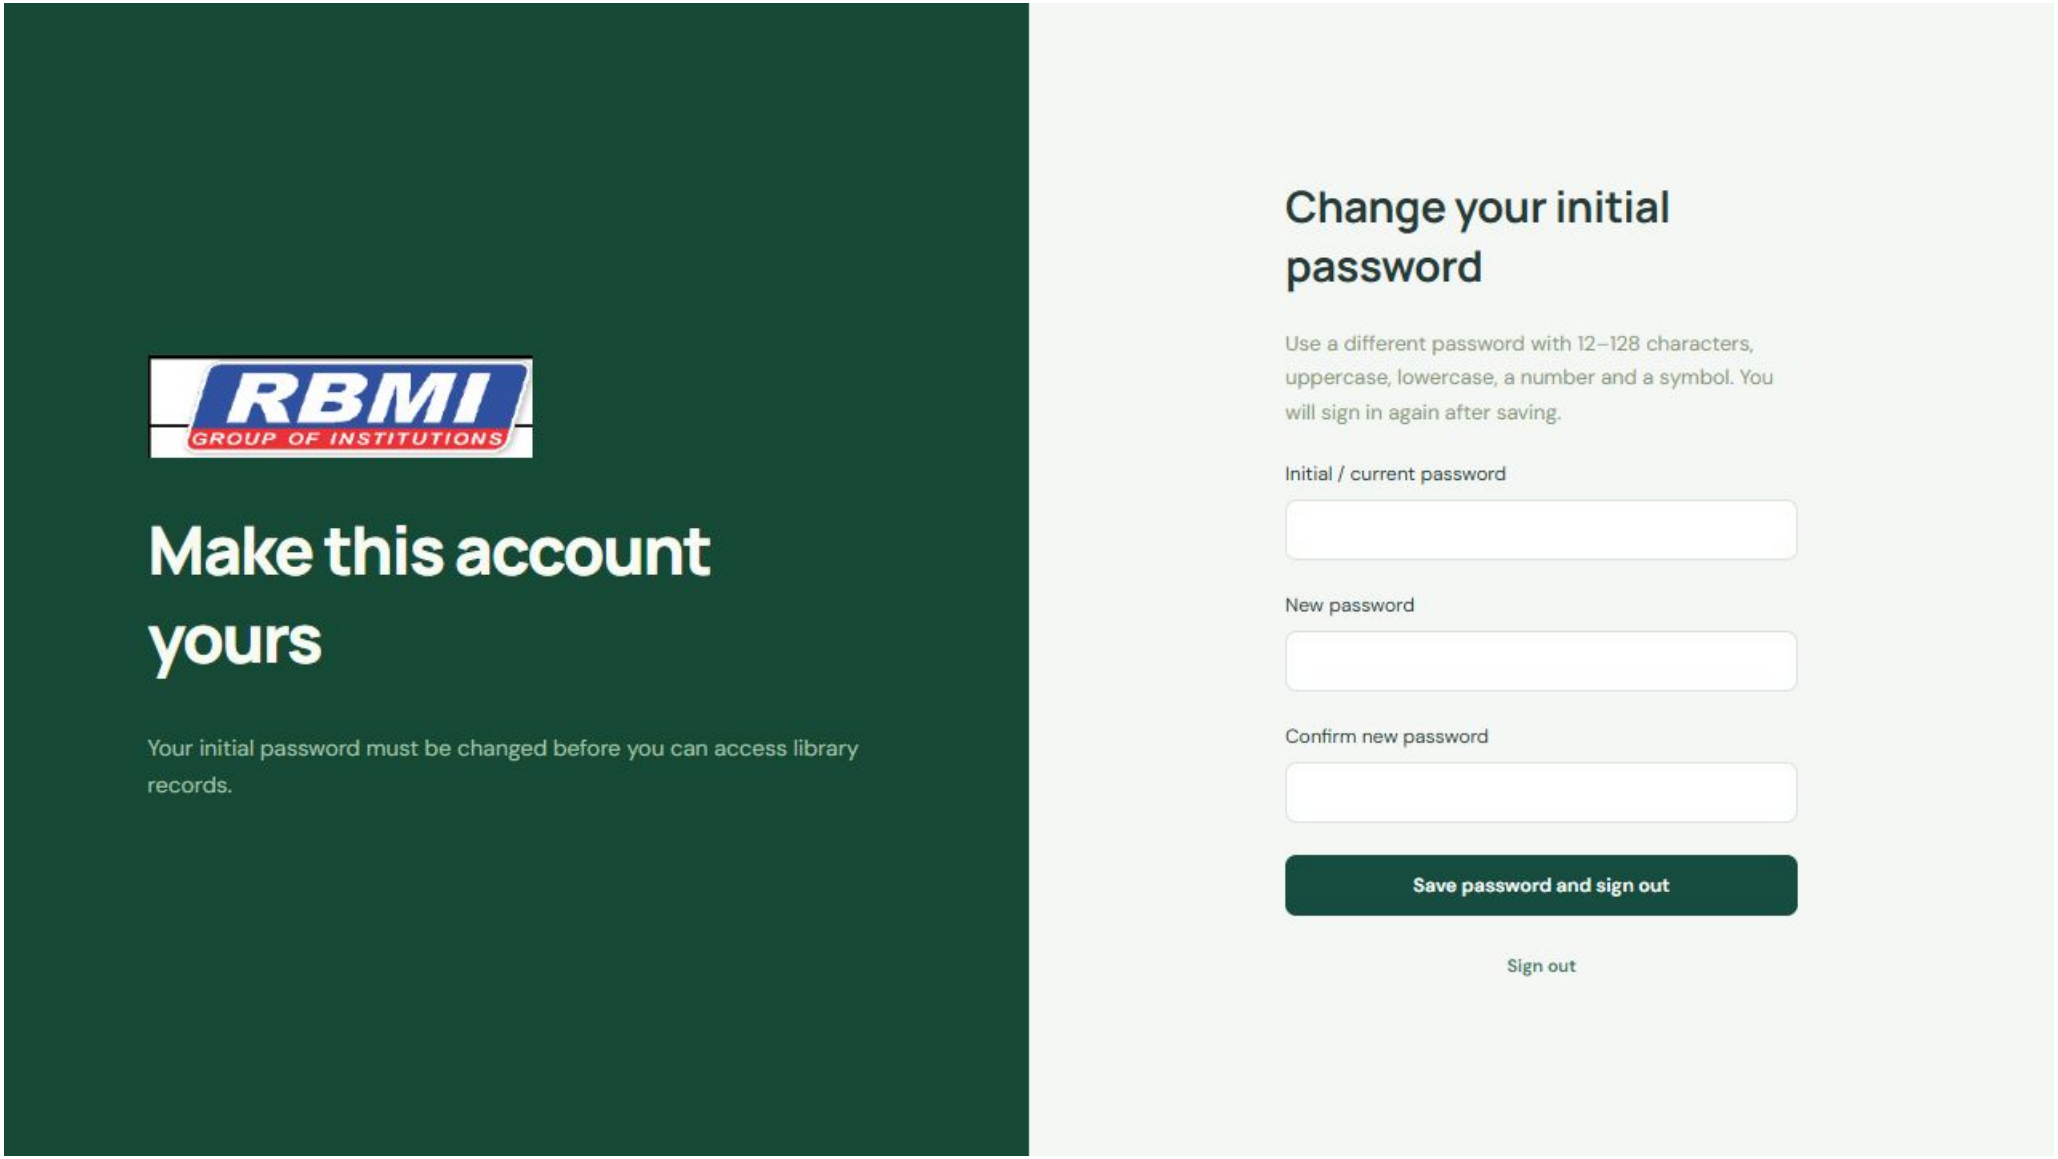

03.2 / Change or recover a password

Forgot password asks for the registered email. Request the message and use the newest recovery link; never share passwords. (Sample workspace)

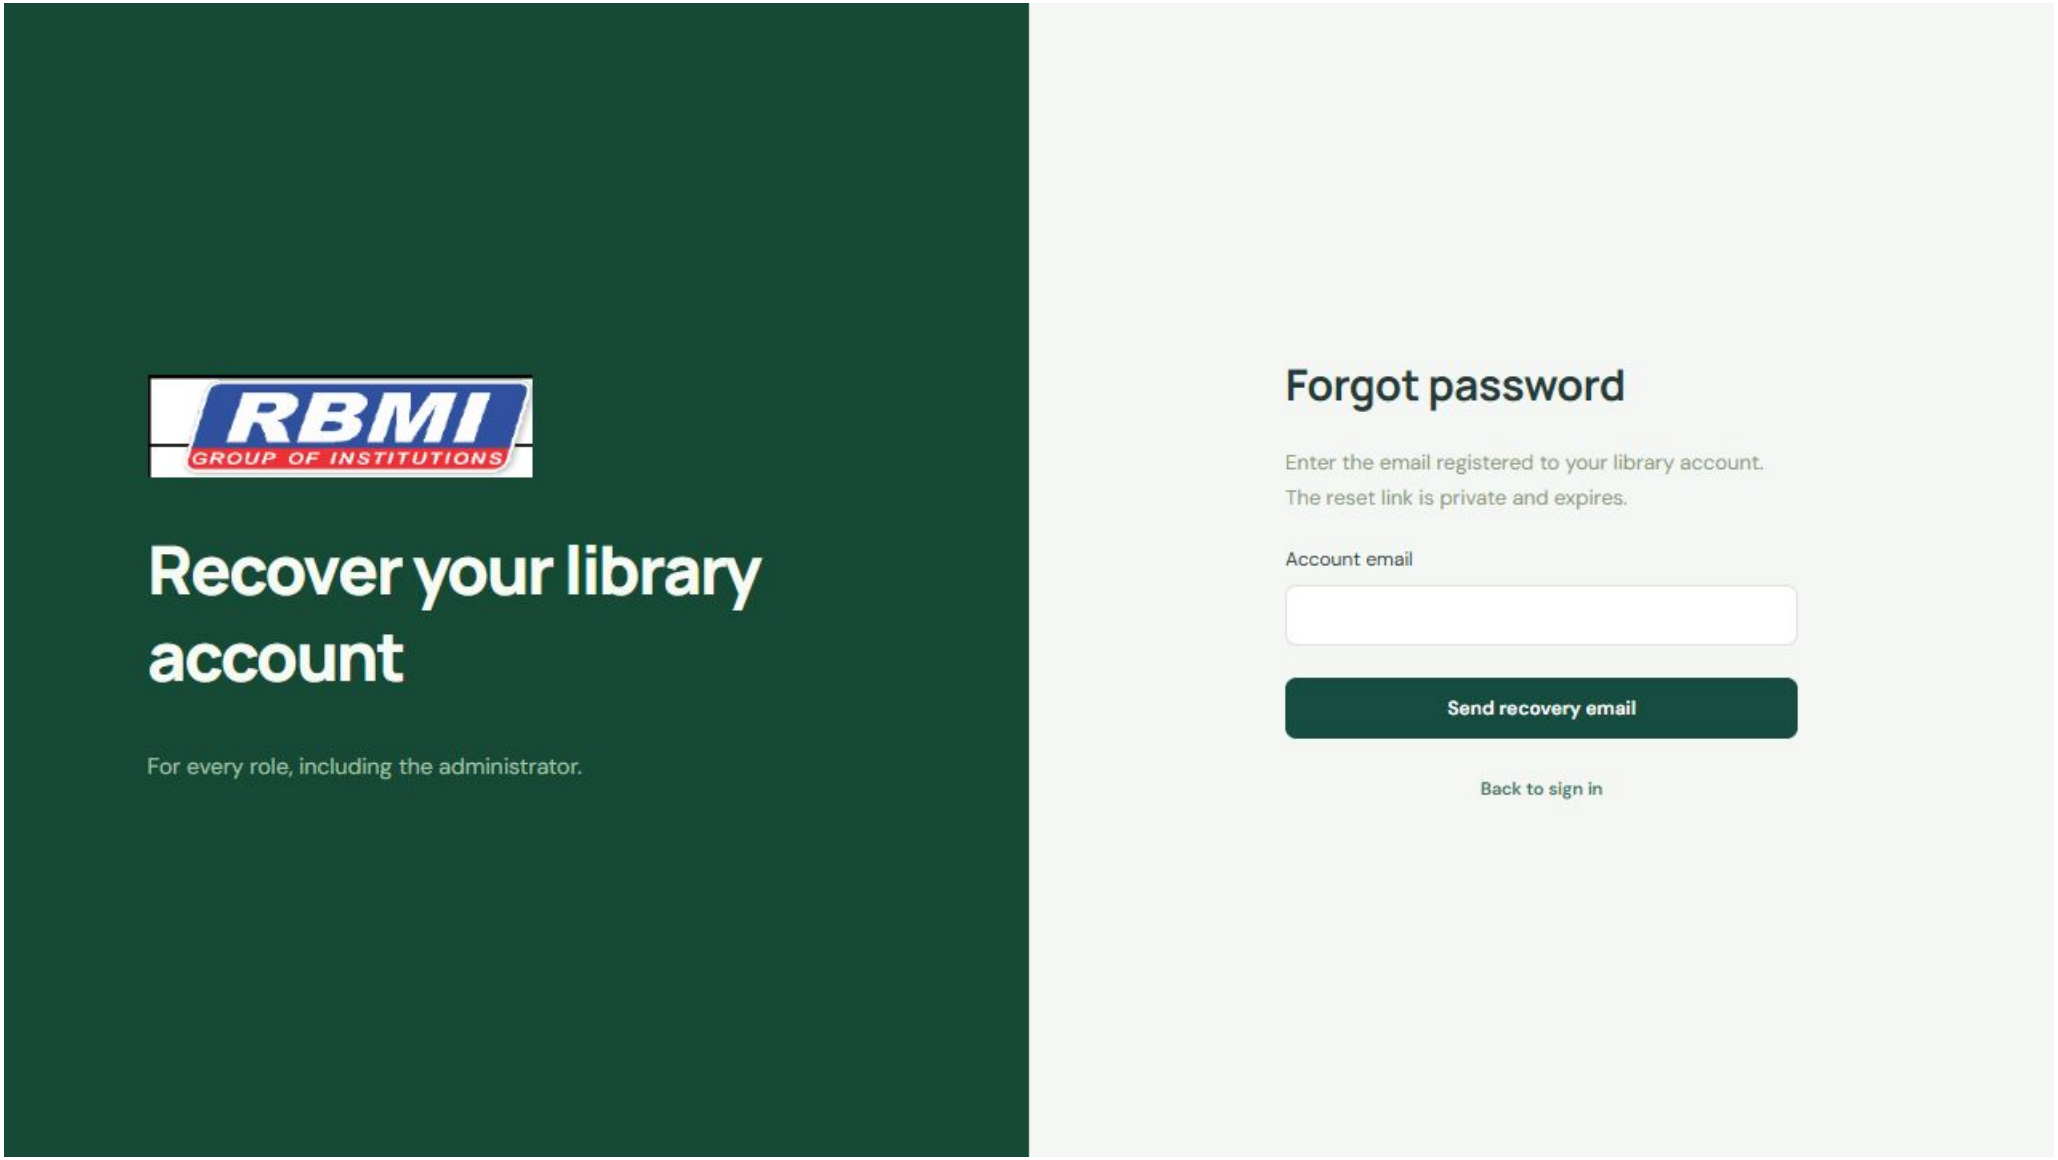

04 / Overview and the daily desk routine

Overview shows physical-copy and bibliographic-title totals, active and overdue loans, posted outstanding fines and collection status for the selected library.

How to use this section

1. At opening verify the library, designated librarian and availability panel. Record any librarian absence for the relevant date.

2. Review Loans needing attention and waiting holds. Use Issue a book, or open Circulation for return and renewal.

3. Verify patron identity and book barcode for every transaction. Review any rejection before repeating it.

4. Refresh after colleagues' changes. At closing export required reports, inspect audit entries and follow the backup procedure.


Notes and limits

Outstanding fines shows assessed unpaid balances, not projected charges on every overdue active loan.

The application refreshes after its own changes. It does not subscribe to automatic real-time updates.

04.1 / Overview and the daily desk routine

Check the selected library, today’s availability, collection totals, active loans, overdue books and assessed fine balance. (Sample workspace)

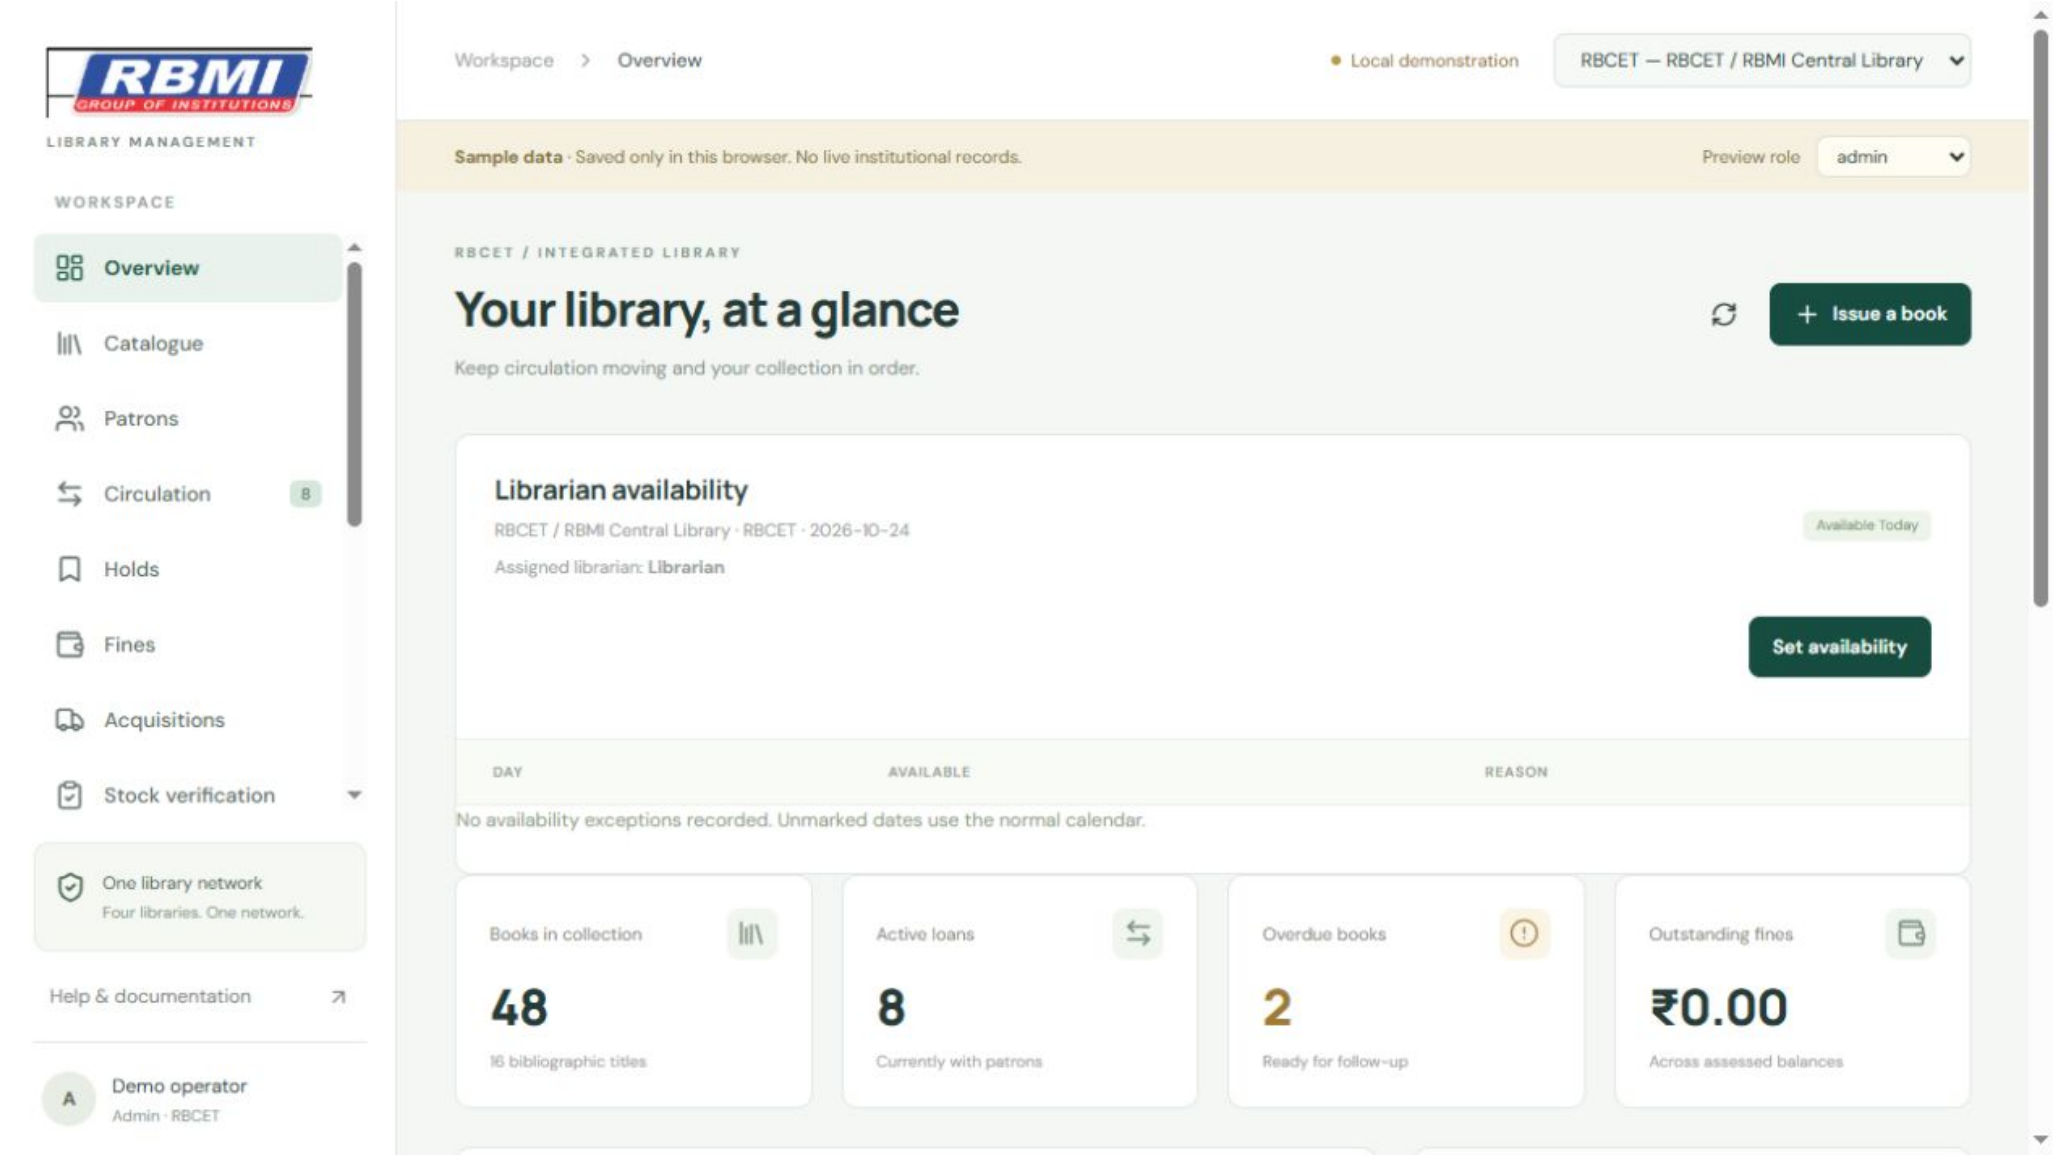

05 / Librarian availability and fine-free days

An unavailable date is a full-day exception for one library. The database records the date, reason, operator and change time. Partial-day closures are not modeled.

How to use this section

1. In Overview or Settings > Librarian availability, verify the selected library and librarian name.

2. Select the date, set availability off, enter a reason such as Librarian on approved leave, and save.

3. Confirm the history entry and the No fine badge for a closed current day. Correct an erroneous closure by restoring availability with a reason.

4. The designated librarian can edit today or a future date up to one year ahead. Only admin can correct historical dates.

5. Fine calculation skips unavailable dates only for this library. A due date that falls on a closed day moves to the next eligible open date.

6. Example: at INR 2 per eligible overdue day, three weekdays with one recorded unavailable day produce INR 4 before grace and cap. A date that is both a holiday and unavailable is excluded once.


Notes and limits


An unmarked date follows the normal calendar. The system does not infer absence from failed logins or a librarian not signing in.

Historical calendar corrections do not rewrite an already assessed fine. Review the original return and use an authorized audited waiver where appropriate.

05.1 / Librarian availability and fine-free days

Choose the date, availability and reason. An unavailable date is excluded from fines only for the selected library. (Sample workspace)

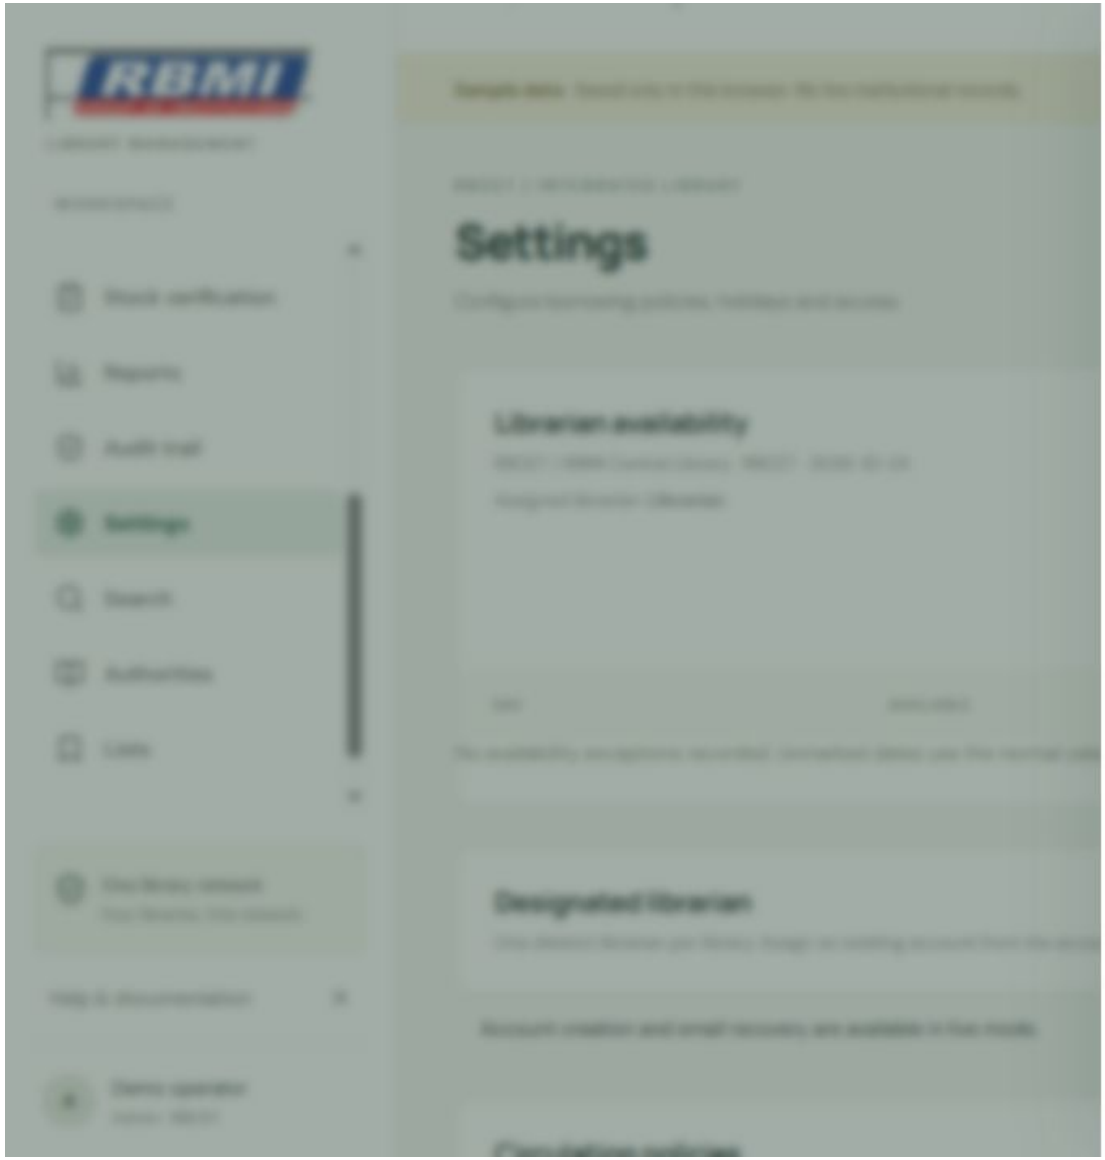

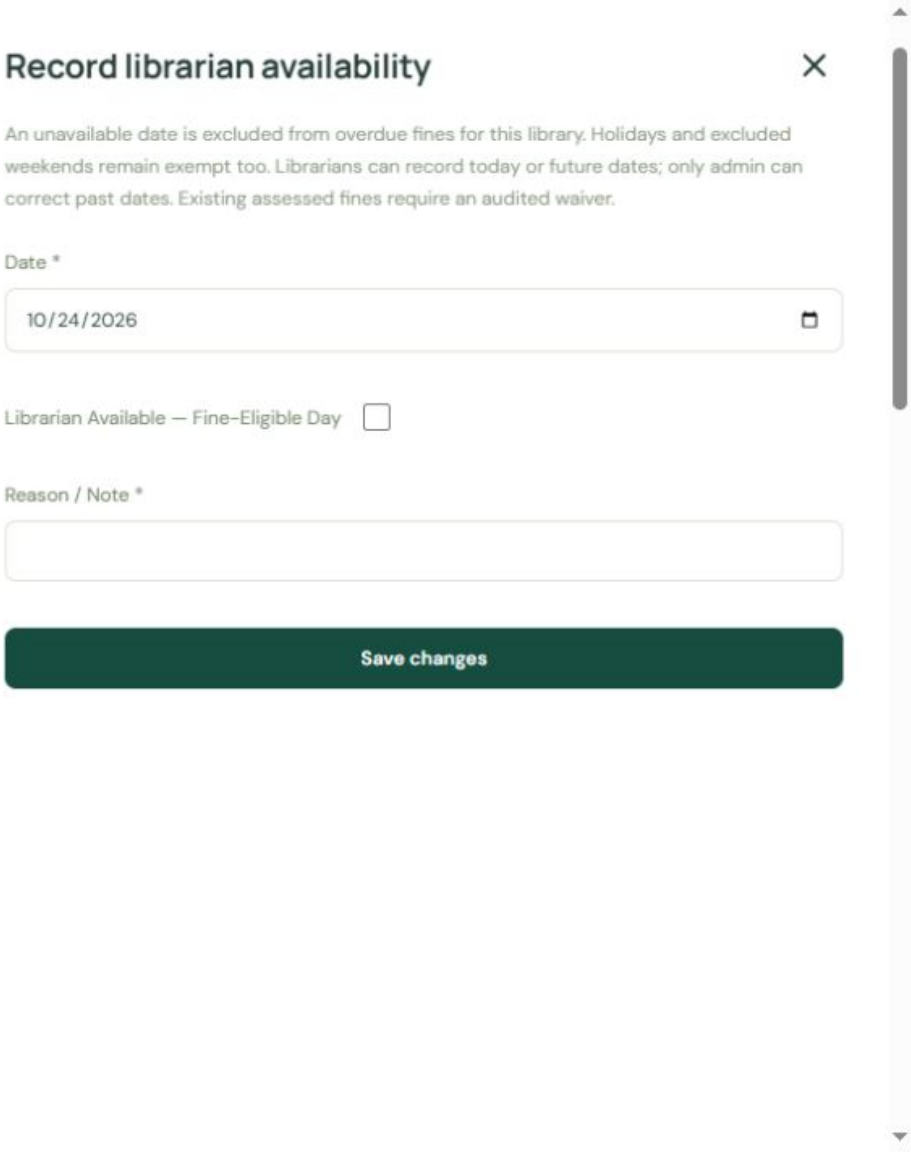

06 / Patrons, faculty and institute assignments

Patrons are borrowing memberships, separate from Auth users. All supplied RBCET student files are assigned to the shared RBCET/RBMI library.

How to use this section

1. Open Patrons and search by name, code, category or department. Source card number is the patron code; roll number is used when no card number was supplied.

2. Expand View profile to inspect supplied roll/card numbers, institute, course, branch, year, semester, admission date, mobile, email, gender and birth date where present.

3. To add faculty individually, select the library, choose Add patron, set category Faculty and choose the institute. RBCET and RBMI share one library but remain separate institute choices. Enter the faculty employee/patron code, name and department, then save.

4. Add patron requires unique code, name, category and active status. Email, department/class and expiry are optional.

5. To edit a membership, retain its existing code. The core editor changes name, email, category, department, active flag and expiry; uploaded additional profile fields remain preserved.

6. Deactivate or expire memberships when borrowing must stop. Preserve their loan history. Export CSV only for authorized institutional work.

7. Patron search runs against the database. Use Previous / Next beneath the table to browse 50 matching records per page. CSV export reads every matching page, not just the visible rows.

Notes and limits


Source blanks remain blank. No birth dates, contact information or expiry dates are invented.

Student and faculty bulk imports create linked patron logins when a unique real email is supplied. Student profiles and source archives are private and never appear in anonymous OPAC responses.

Faculty memberships use faculty circulation policies. Bulk uploads create linked Patron-role accounts; individual Add patron creates only the borrowing membership.


06.1 / Patrons, faculty and institute assignments

Search queries the full patron register. Previous / Next browse database pages; Bulk students and Bulk faculty provide invitation-based account setup. (Sample workspace)

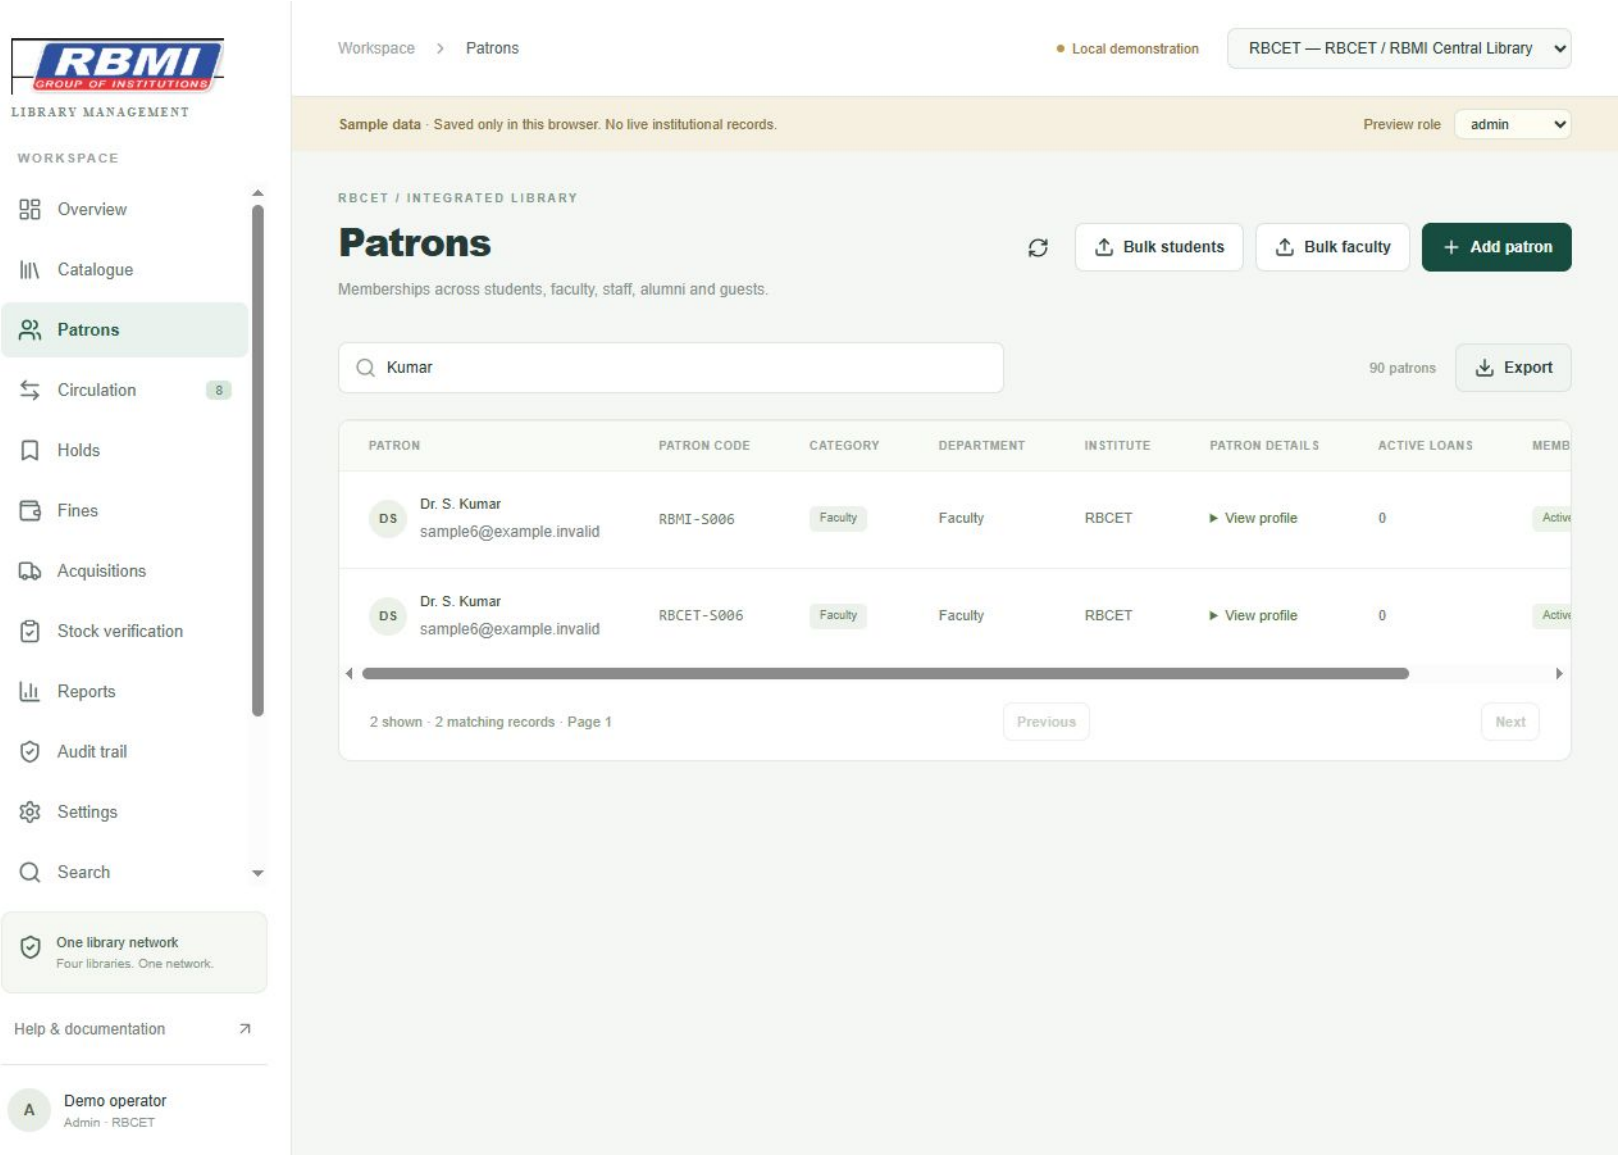

06.2 / Patrons, faculty and institute assignments

For a faculty membership, choose Faculty and the institute. The patron code identifies the borrowing record. (Sample workspace)

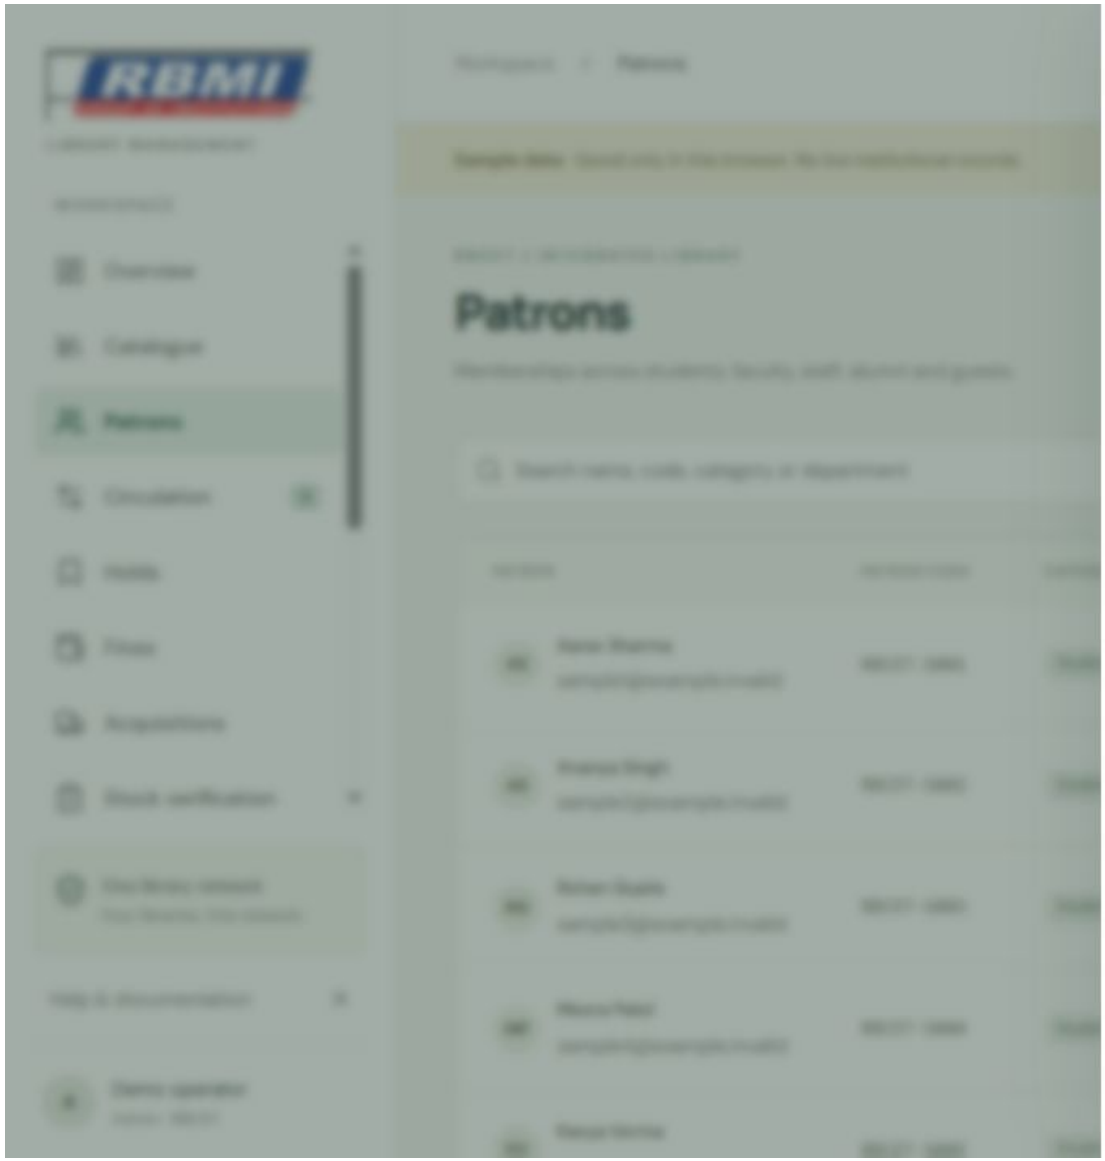

07 / Bulk uploads and the supplied Excel import

The supplied workbooks were processed through a controlled administrative import. Regular application Bulk upload uses UTF-8 CSV, with preview and confirmation before a transactional batch.

How to use this section

1. Choose the correct library. Open Catalogue > Bulk upload for books, or Patrons > Bulk students / Bulk faculty, then download its template.

2. Books require title, author, accession and barcode. Optional fields include ISBN, publisher, subject, classification, year, shelf and price. One row creates one physical copy.

3. Student CSV requires code and name; optional email, category, department, active and expires. Additional profile columns can be preserved through student imports.

4. Faculty CSV requires code and name. Set category to faculty; institute must belong to the selected library (RBCET or RBMI for the central library, otherwise RBCP, RBCN or RBGN). Optional columns include email, department, active and expires. Existing faculty codes update memberships; a code already used by a student or another category is rejected. Review the preview and approve the batch.

5. New templates omit passwords. Supply each person's real, unique email address for a secure invitation. A legacy password column is ignored and removed before profiles or audit records are saved. Existing accounts keep their current password.

6. Export Excel as UTF-8 CSV without converting identifiers into scientific notation or losing leading zeros. Use no more than 1,000 rows and 5 MB per batch.

7. Review errors and the first eight rows, confirm the checkbox and import. A failed row rolls the entire batch back.

8. Existing patron codes update core memberships. Duplicate book barcodes/accessions reject the batch. Review updates carefully; blank expiry clears it and blank active defaults to true.

9. The owner-provided import prepares 278 students and 26,071 book copies. One book row missing a barcode or title is held in the private review report. Original workbooks remain unchanged.

10. After memberships save, keep the page open while invitation emails are requested in batches of ten. Review Imported account results. Used/missing emails, inactive memberships and SMTP limits need review. Re-upload corrected rows to retry without replacing existing accounts. Use Resend setup email for a pending invitation.

Notes and limits


Protected archives retain source hashes, sheet names, row numbers and original fields. The BSCS sheet's incomplete header was mapped to the common 15-column book layout after inspection.

Missing authors use Unknown author. Missing or nonnumeric prices use zero operationally while retaining the original value in source details. Historical loans are not inferred from a stock list.

Membership records save transactionally; Auth invitations are a subsequent step with per-row results. A failed email does not undo a saved membership. Delivery depends on Supabase SMTP and provider quotas; the application never emails a plain-text password.


07.1 / Bulk uploads and the supplied Excel import

Download the faculty template, fill the membership fields and provide a unique real email. New accounts receive invitation emails; legacy password columns are ignored. (Sample workspace)

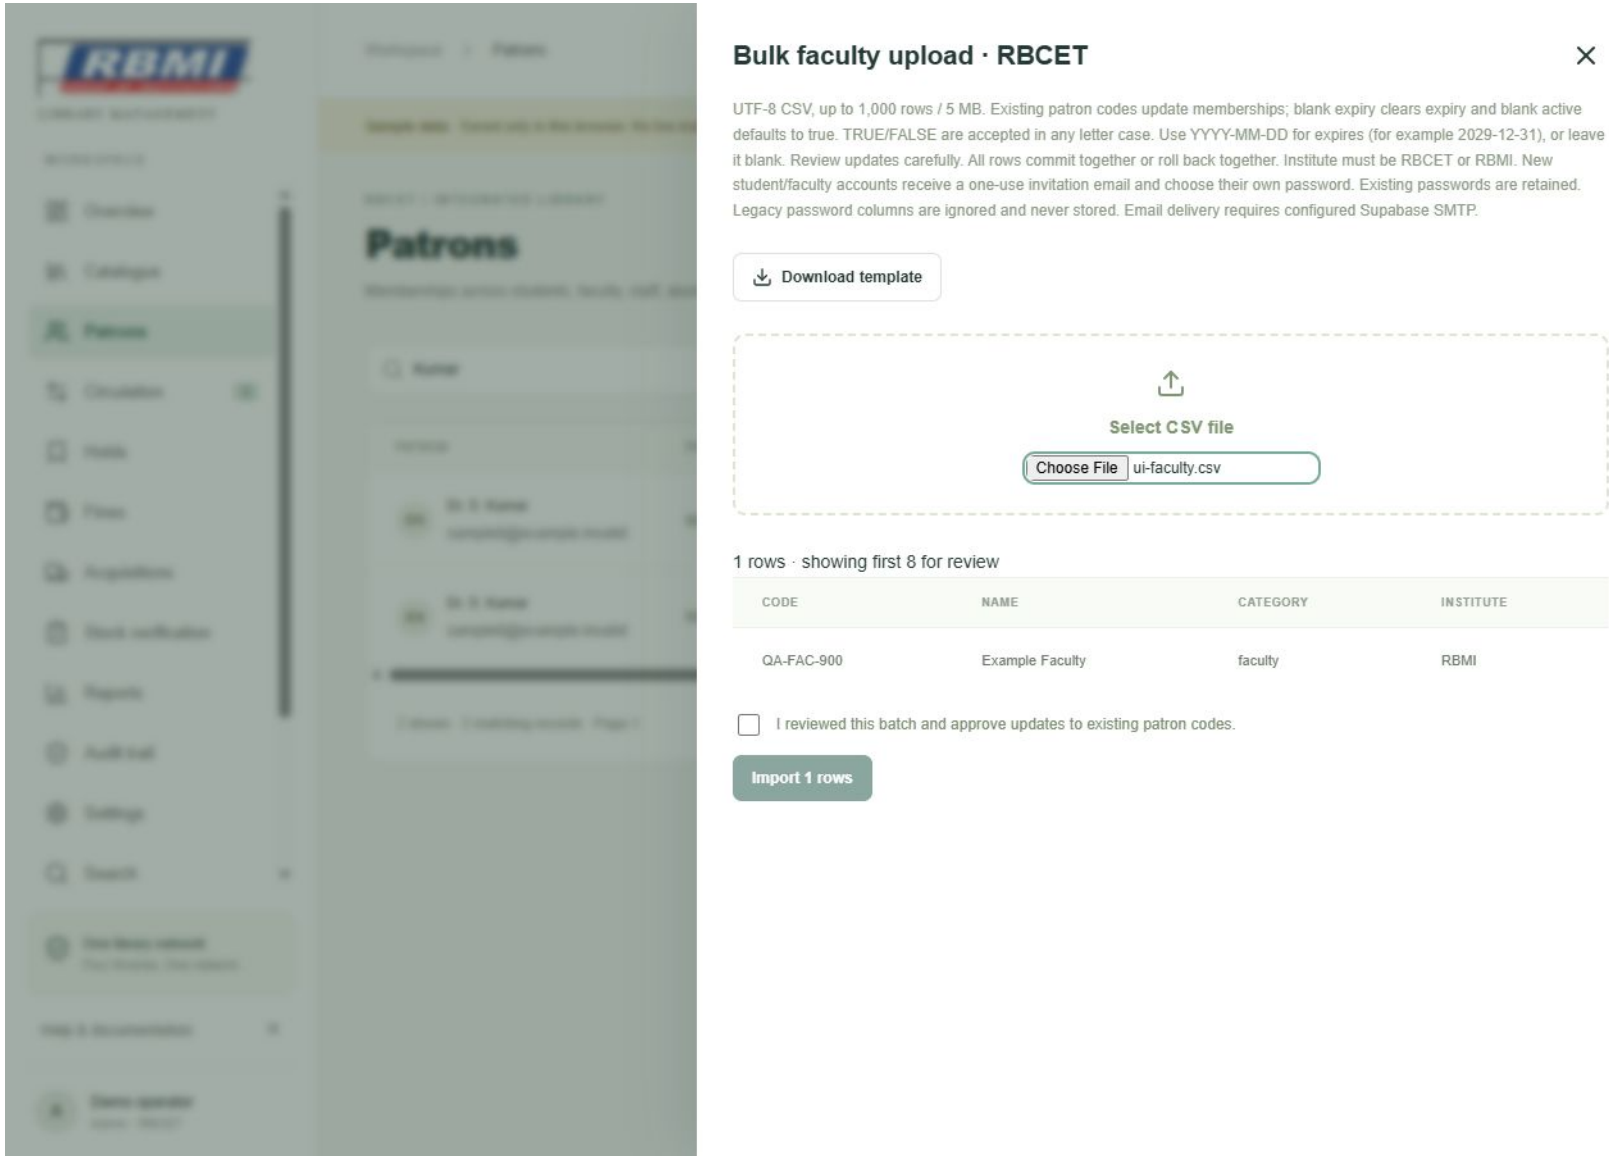


07.2 / Bulk uploads and the supplied Excel import

Student upload uses its own template. Review the preview and approval checkbox; a real unique email is needed for a new login. (Sample workspace)

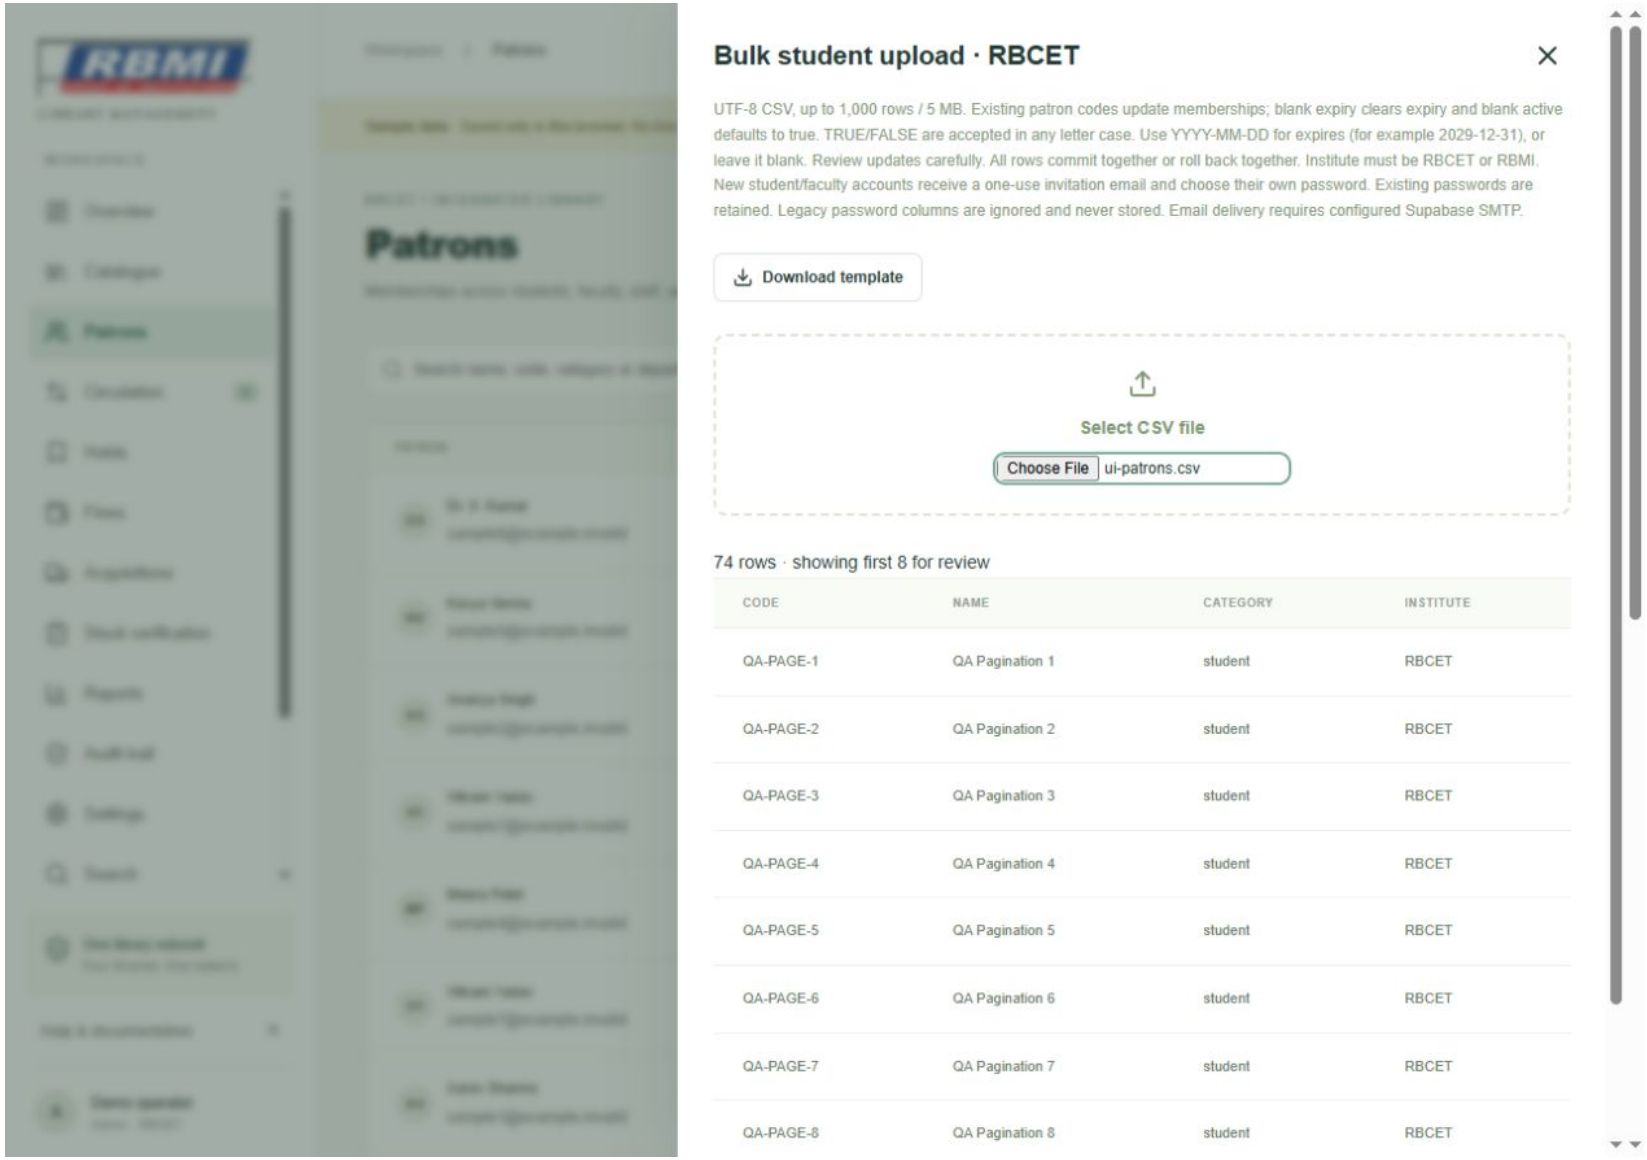

07.3 / Bulk uploads and the supplied Excel import

Book CSV upload adds physical copies. Review accessions and barcodes before approving the transactional batch. (Sample workspace)

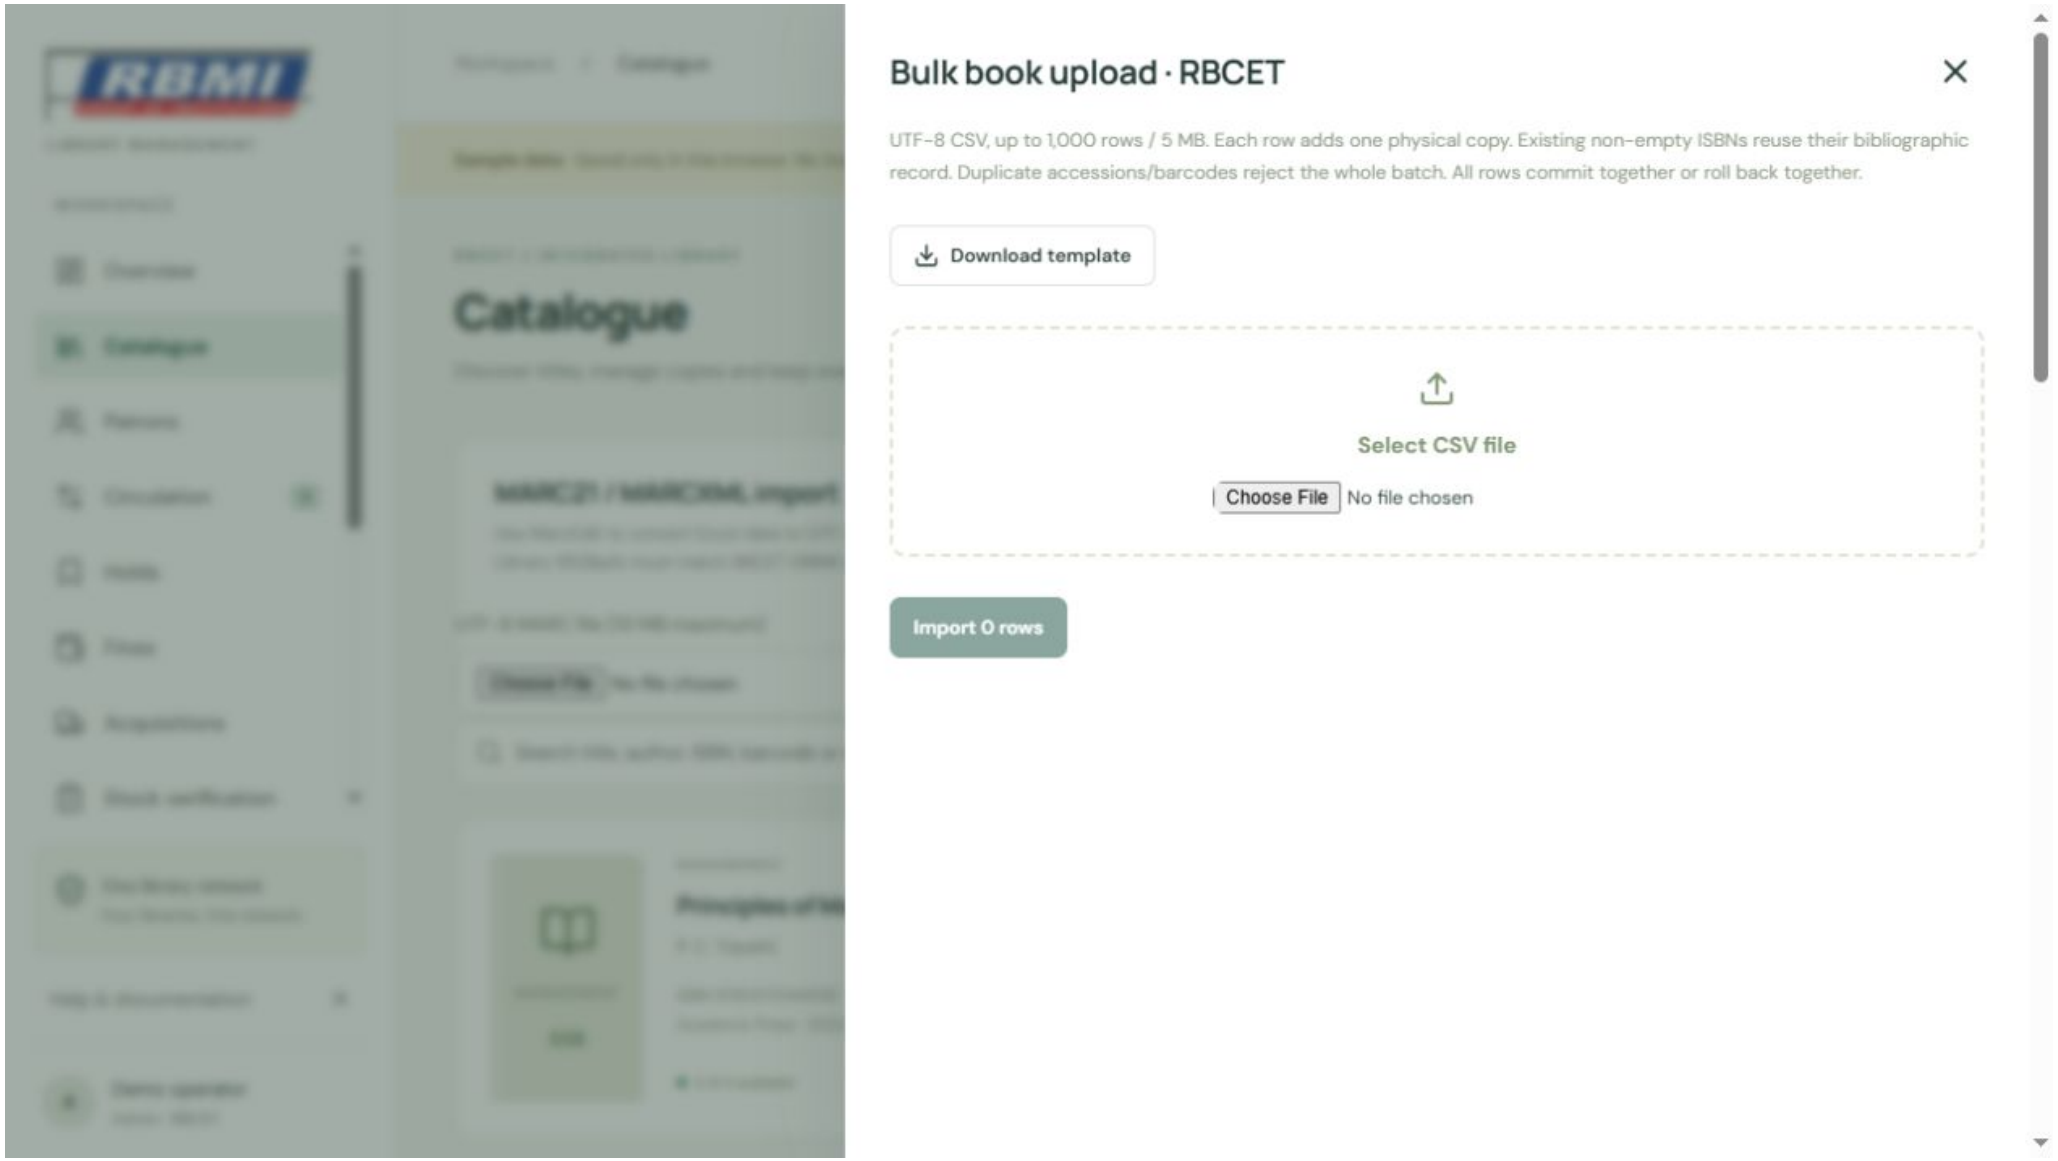

08 / Bibliographic records, copies and barcodes

A bibliographic record describes a title/edition. Each physical copy has its own accession, globally unique barcode, shelf, price and status.

How to use this section

1. Search Catalogue by title, author, ISBN, classification, barcode or accession. Use Show more to reveal further matching cards.

2. Add title requires title and author. Enter ISBN, publisher, subject, classification/DDC and publication year when known.

3. Open View copies > Add physical copy. Enter unique accession and barcode, shelf and nonnegative price.

4. Use Edit title to correct descriptive fields. Use Status with a reason for available, lost, damaged, withdrawn or missing copies. Loaned copies must first be returned.

5. Use Label to print a Code 128 barcode. Scan-test labels before applying them to books.

6. For imported copies, Source details shows original item type, collection, accession date, pages, publication place and notes when supplied.


Notes and limits

The provided workbook has barcodes but no separate accession column, so its barcode also serves as the accession.

The controlled import groups consistent descriptions into 9,668 bibliographic records. Regular CSV import reuses a matching non-empty ISBN; inspect editions before using that simpler path.

08.1 / Bibliographic records, copies and barcodes

The catalogue separates bibliographic titles from copies. Use Add title, View copies and Bulk upload as appropriate. (Sample workspace)

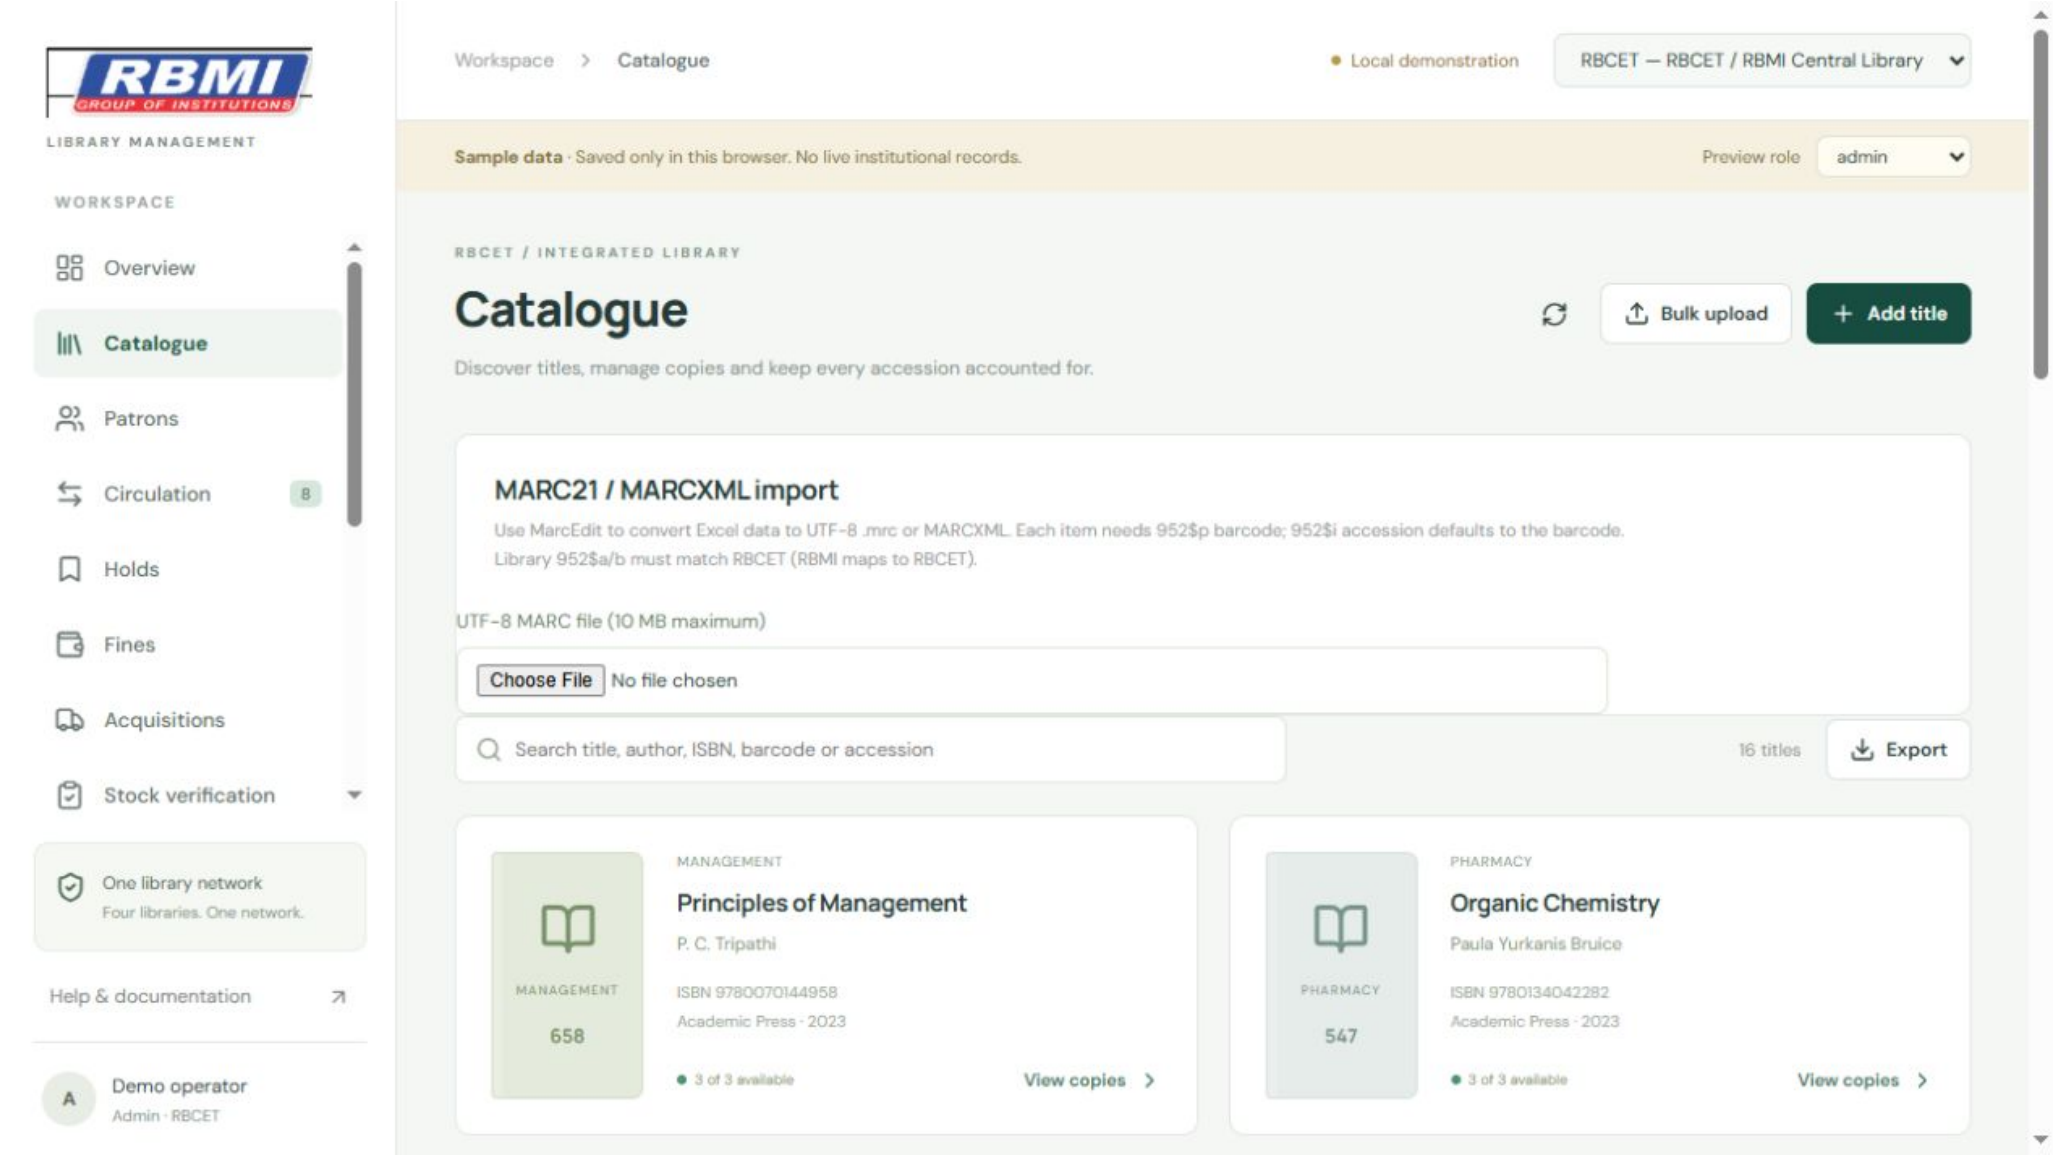

09 / MARC book migration

Catalogue > MARC migration supports UTF-8 ISO2709 .mrc and MARCXML .xml files, supplementing CSV and the controlled Excel import.

How to use this section

1. Prepare a UTF-8 file up to 10 MB and 1,000 physical copies. Convert MARC-8 through your cataloguing tools first.

2. Map 245 title, 100/110/700 author, 020 ISBN, 260/264 publisher/year, 650 subject and 082 classification.

3. Items use 952$p barcode, 952$i accession or barcode fallback, 952$a/$b library, 952$c shelf and 952$g price.

4. Select the file, review its preview and confirm the checkbox. Item library must match the selected workspace; RBMI is an alias for shared RBCET.

5. Import and inspect copy counts and identifiers. Invalid records, duplicate barcodes or cross-library items reject the whole batch.


Notes and limits

This is targeted MARC import, not a complete MARC editor, MARC-8 converter or lossless MARC export service.

Invalid record lengths, directories and terminators are rejected. XML document types and entities are prohibited.

09.1 / MARC book migration

The MARC21 / MARCXML import panel appears above the catalogue. Select UTF-8 MARC, review the mapped copies and confirm the import. (Sample workspace)

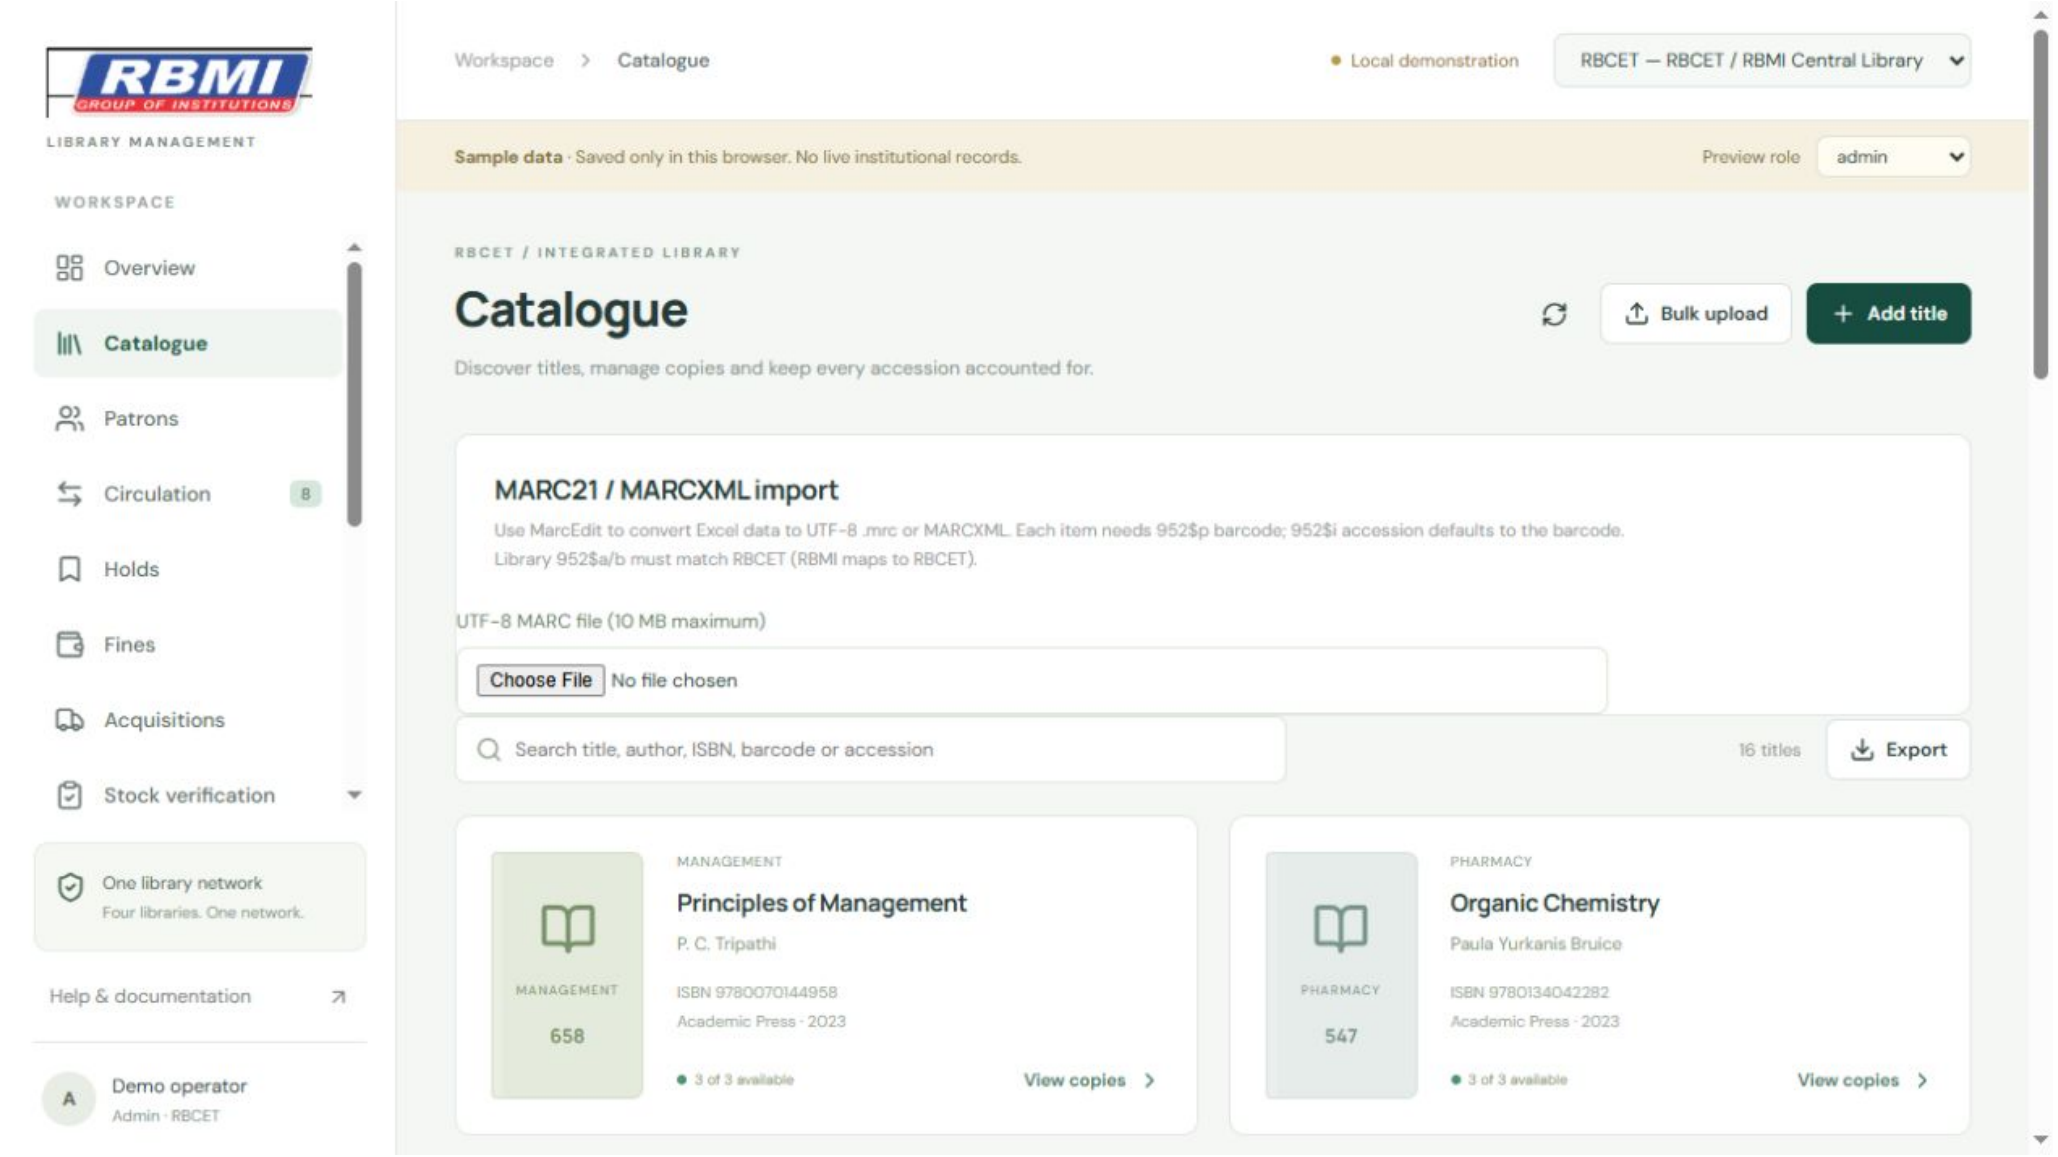

10 / Issue, return and renewal

Issues store the library code/name, operator UUID, timestamp, barcode/accession, title and patron code snapshots. A book must return to its issuing library.

How to use this section

1. Choose the correct library and click Issue a book. Verify the explicit library code, scan barcode or accession and enter patron code.

2. Save. The server checks copy availability, membership/expiry, loan limits, overdue loans, balance threshold and FIFO hold priority. Due dates follow the library calendar.

3. Open Circulation and locate the active loan by book, barcode or patron. Verify the library column and due date.

4. Use Renew only when permitted. Overdue loans, exhausted renewals, waiting holds, inactive memberships and excessive balances block renewal.

5. Use Return in the same library. The server rejects another issuing library code even for admin. Return, fine posting and copy availability commit together.

6. Inspect the return notice and assessed fine. In Returned loans choose Receipt and print its library, patron, book and fine details.

7. Active and returned loan lists use database pages of 50 records. Search matches the full list. Use Previous / Next to navigate; overview statistics count all records even when only a preview is loaded.


Notes and limits

Each loan stores its policy values. Later policy edits apply to new loans; existing issues retain their recorded rules.

Do not repeat a successful return. The database rejects returns on a loan already closed.


10.1 / Issue, return and renewal


Active loans show patron, accession, due date and actions. Check the issuing library before issue or return. (Sample workspace)

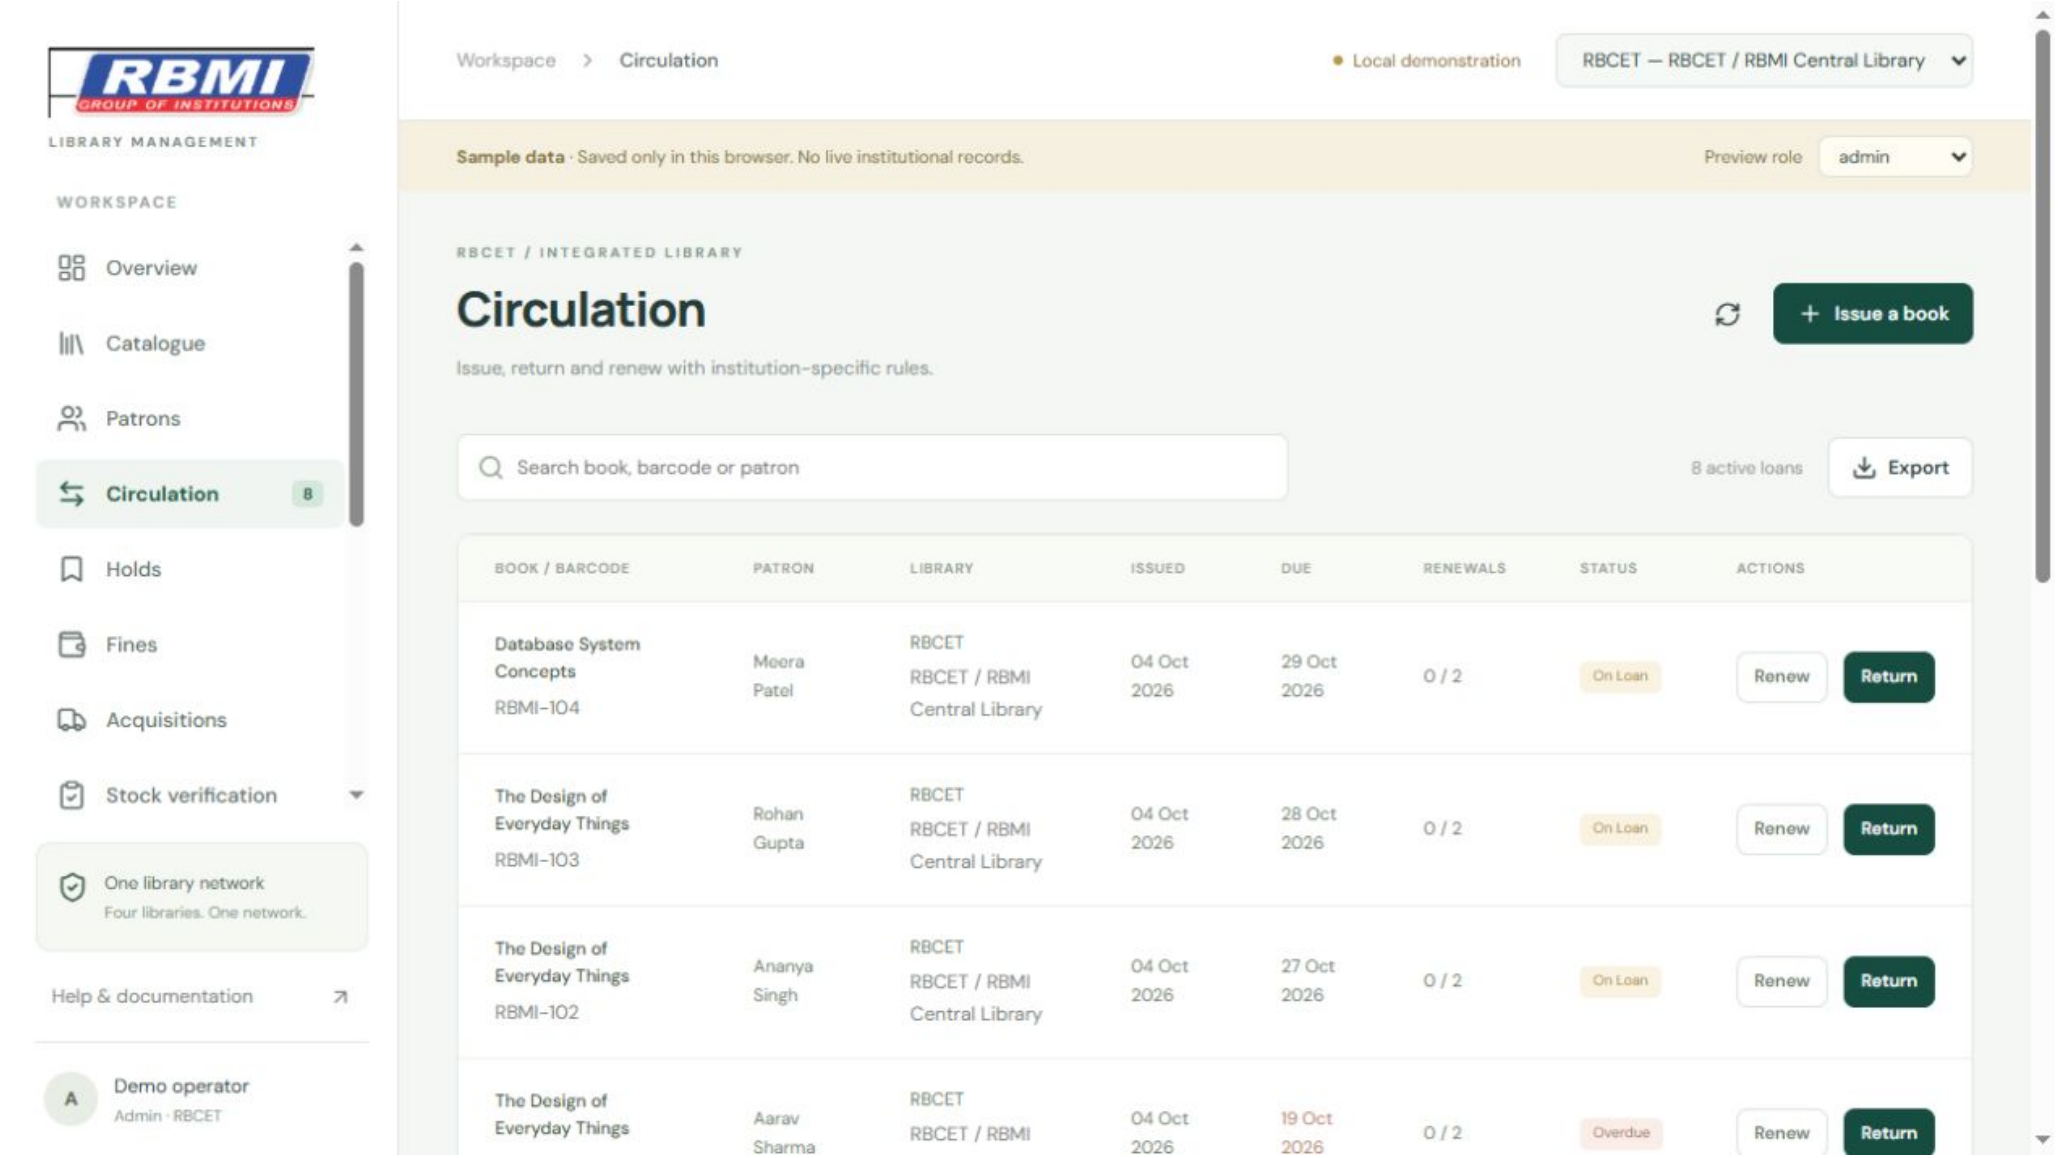

10.2 / Issue, return and renewal

Scan the copy barcode/accession and enter the patron code. The issuing library is shown and recorded. (Sample workspace)

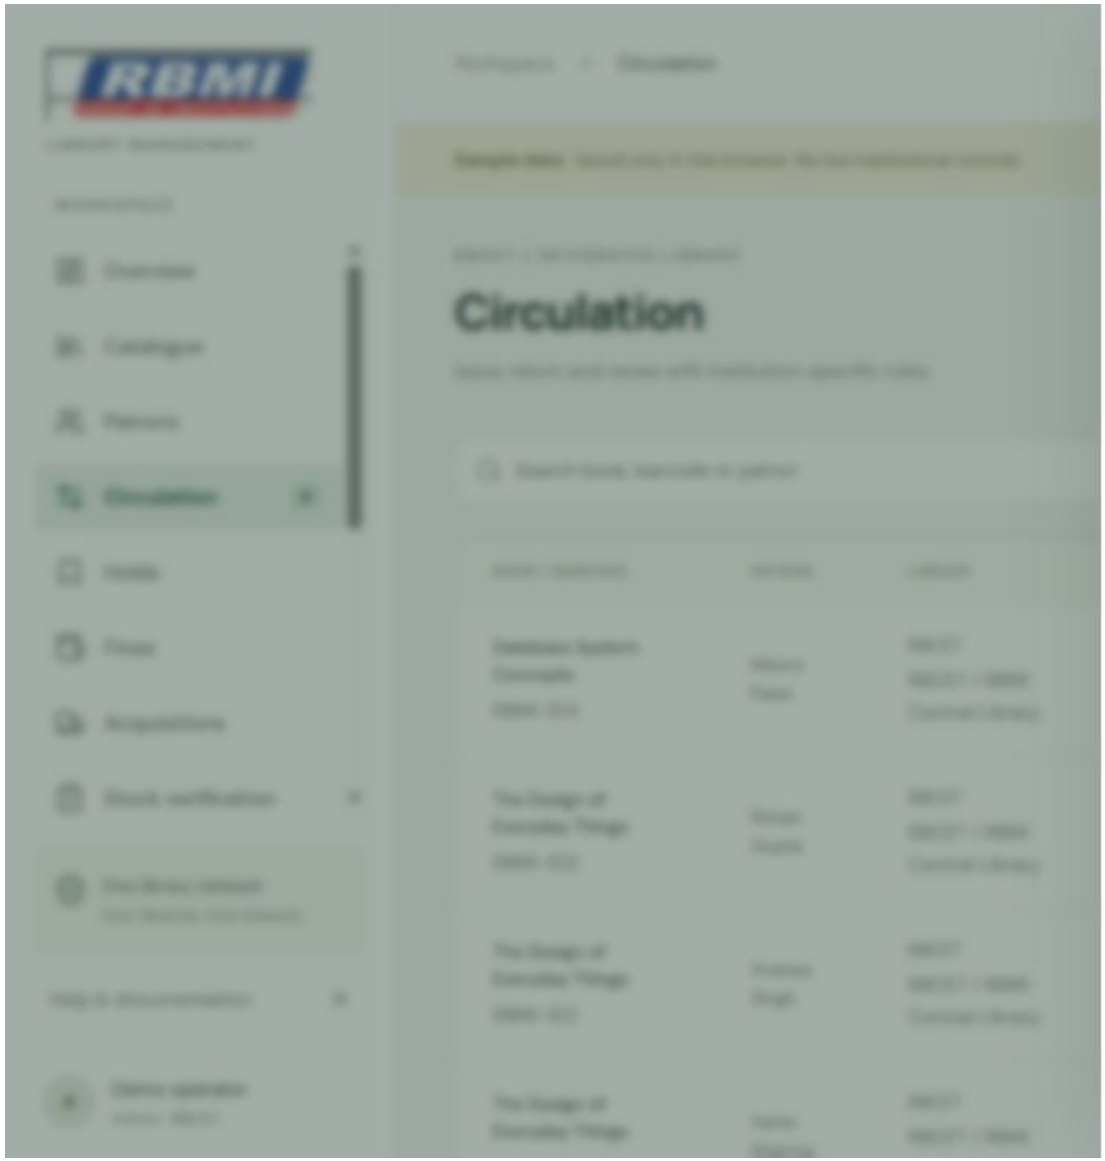

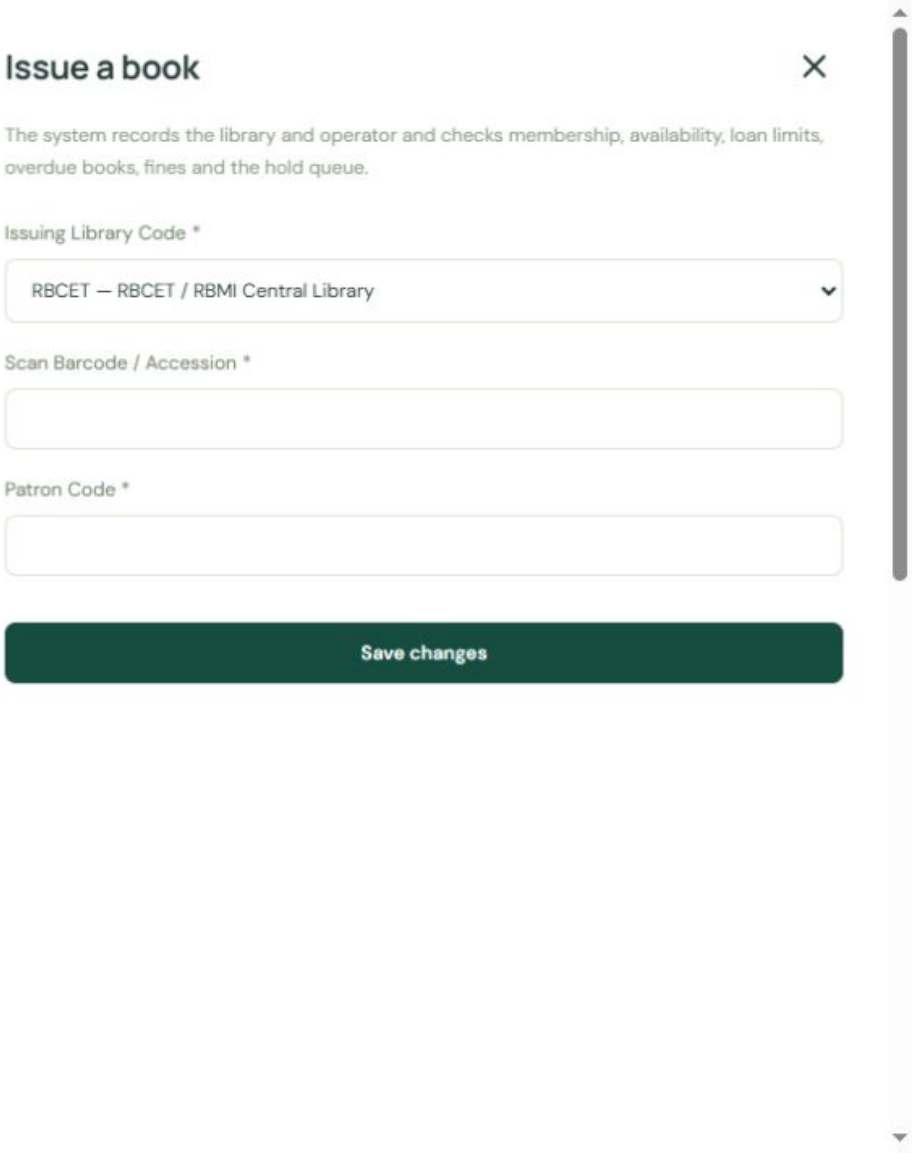


10.3 / Issue, return and renewal

After a sample overdue return, the notice shows the fine assessed and the loan moves to Returned loans. (Sample workspace)



10.4 / Issue, return and renewal

Open Receipt for a returned loan. Verify patron, book, library and fine, then use Print receipt if needed. (Sample workspace)

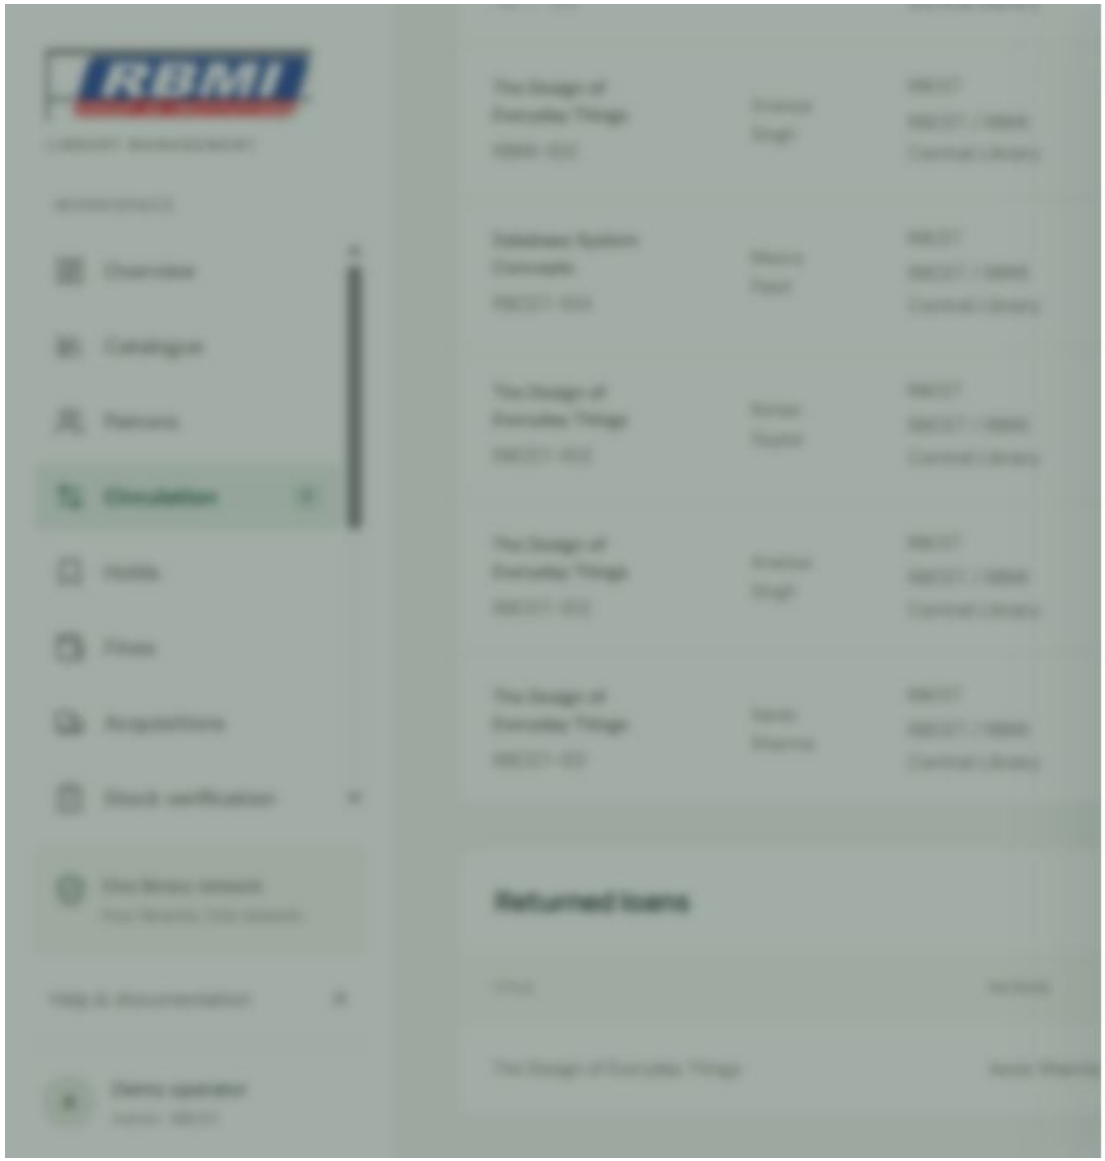

Circulation receipt

RBCET Library

Return receipt · 89f2d98b

Library	RBCET — RBCET / RBMI Central Library
Issued by	Legacy record
Patron	Aarav Sharma
Book	The Design of Everyday Things
Barcode	RBMI-101
Returned	24 Oct 2026
Assessed fine	₹6.00

Print receipt

11 / Holds and reservation priority

Holds reserve a bibliographic title within a library, using a FIFO waiting queue ordered by creation time and identifier.

How to use this section

1. Choose Holds > Place hold, or Place hold in a title's copy drawer. Select a title and enter an active, unexpired patron code.

2. Review queue position, placement time and status. The same patron cannot have duplicate waiting holds on the same title.

3. Issue the next available copy to the first waiting patron. The server blocks queue bypass and marks the hold fulfilled when issued.

4. Cancel unwanted waiting holds. Staff manage the library queue; patrons manage only their own holds.


Notes and limits

A waiting hold blocks renewals of that title.

Pickup-expiry timers, automatic notification emails and inter-library transfers are not implemented. Use the approved institutional contact procedure.


11.1 / Holds and reservation priority

The hold queue is scoped to this library. Place hold opens the title and patron form. (Sample workspace)

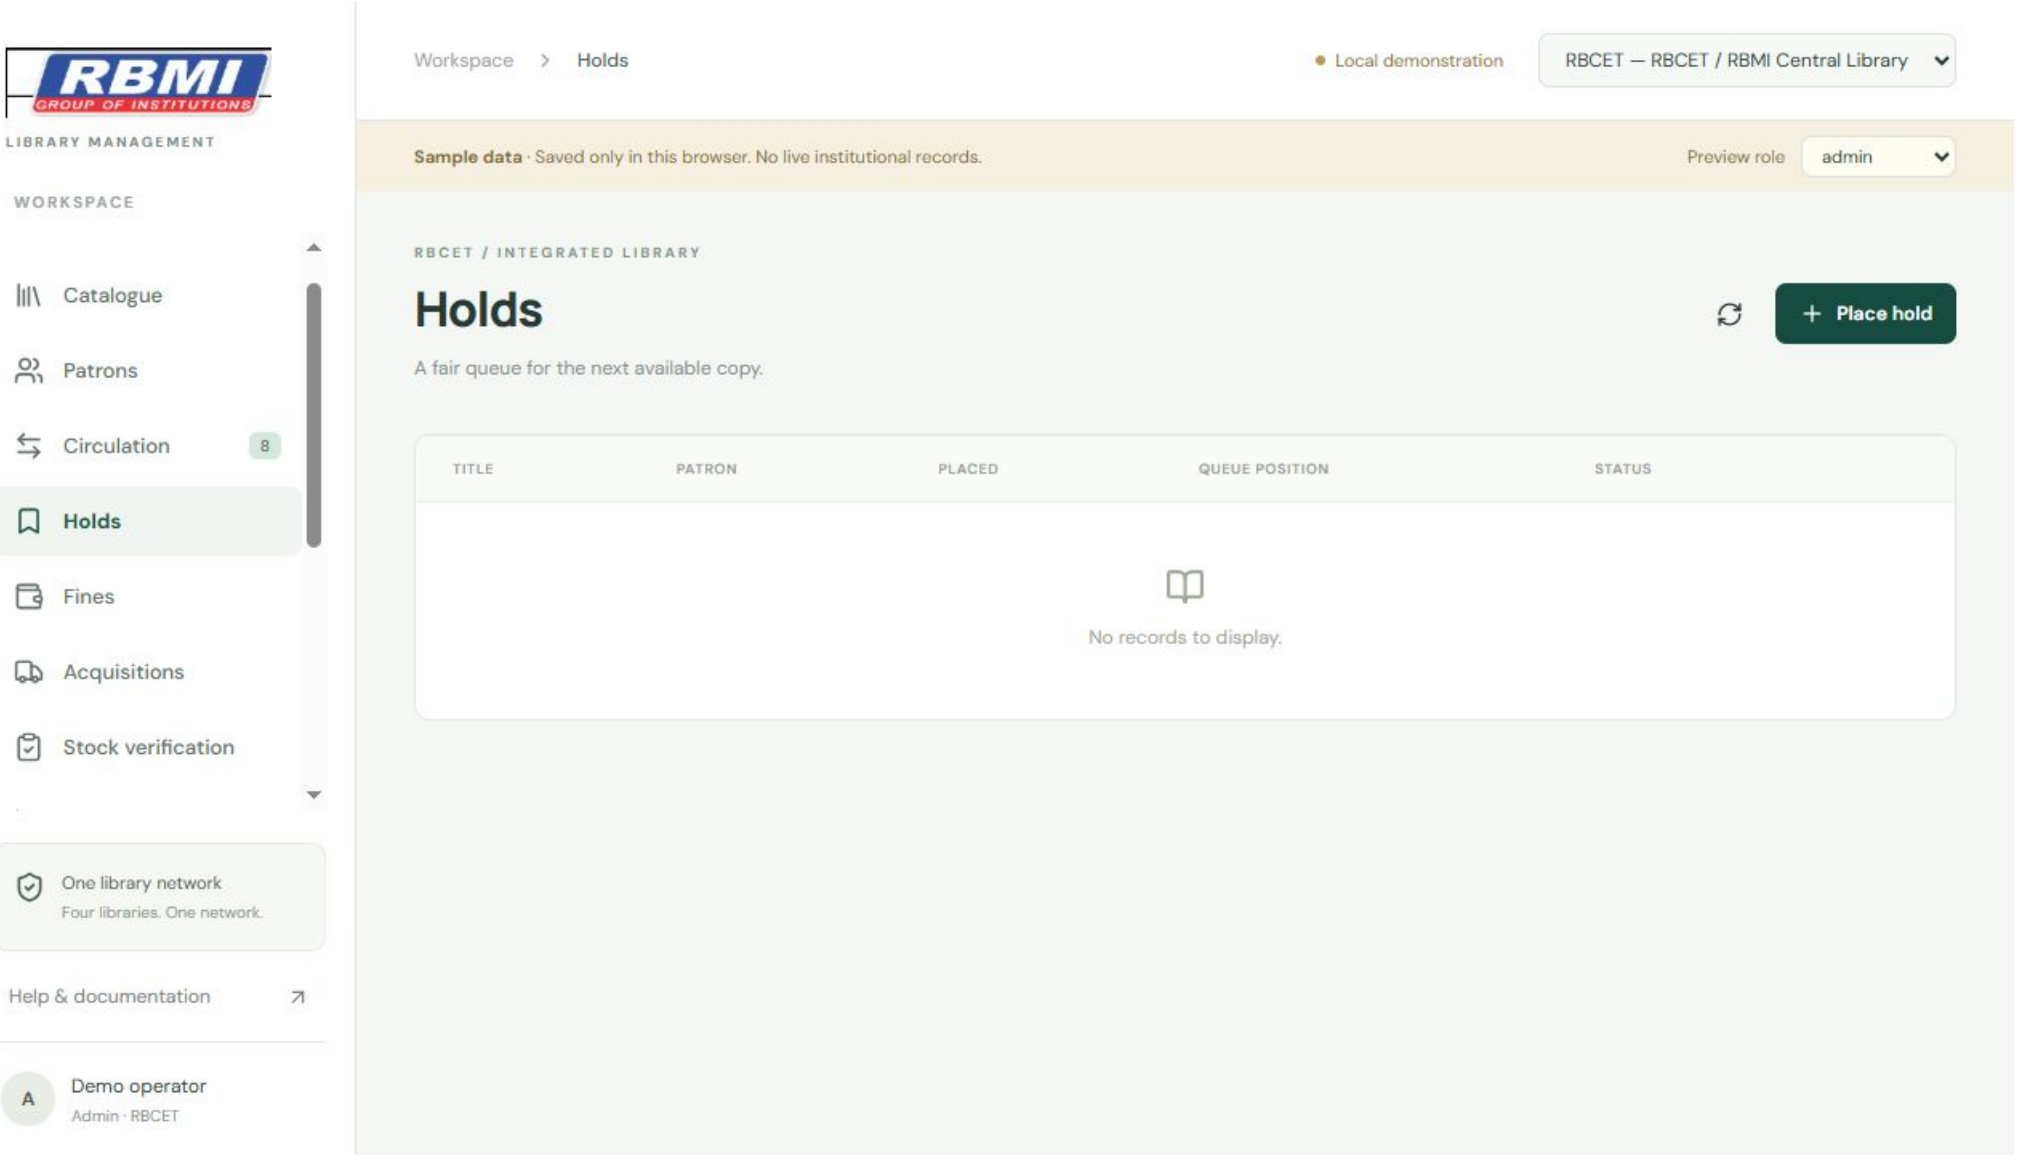

11.2 / Holds and reservation priority

Select the bibliographic title and enter the patron code. The system checks the queue and borrowing eligibility. (Sample workspace)

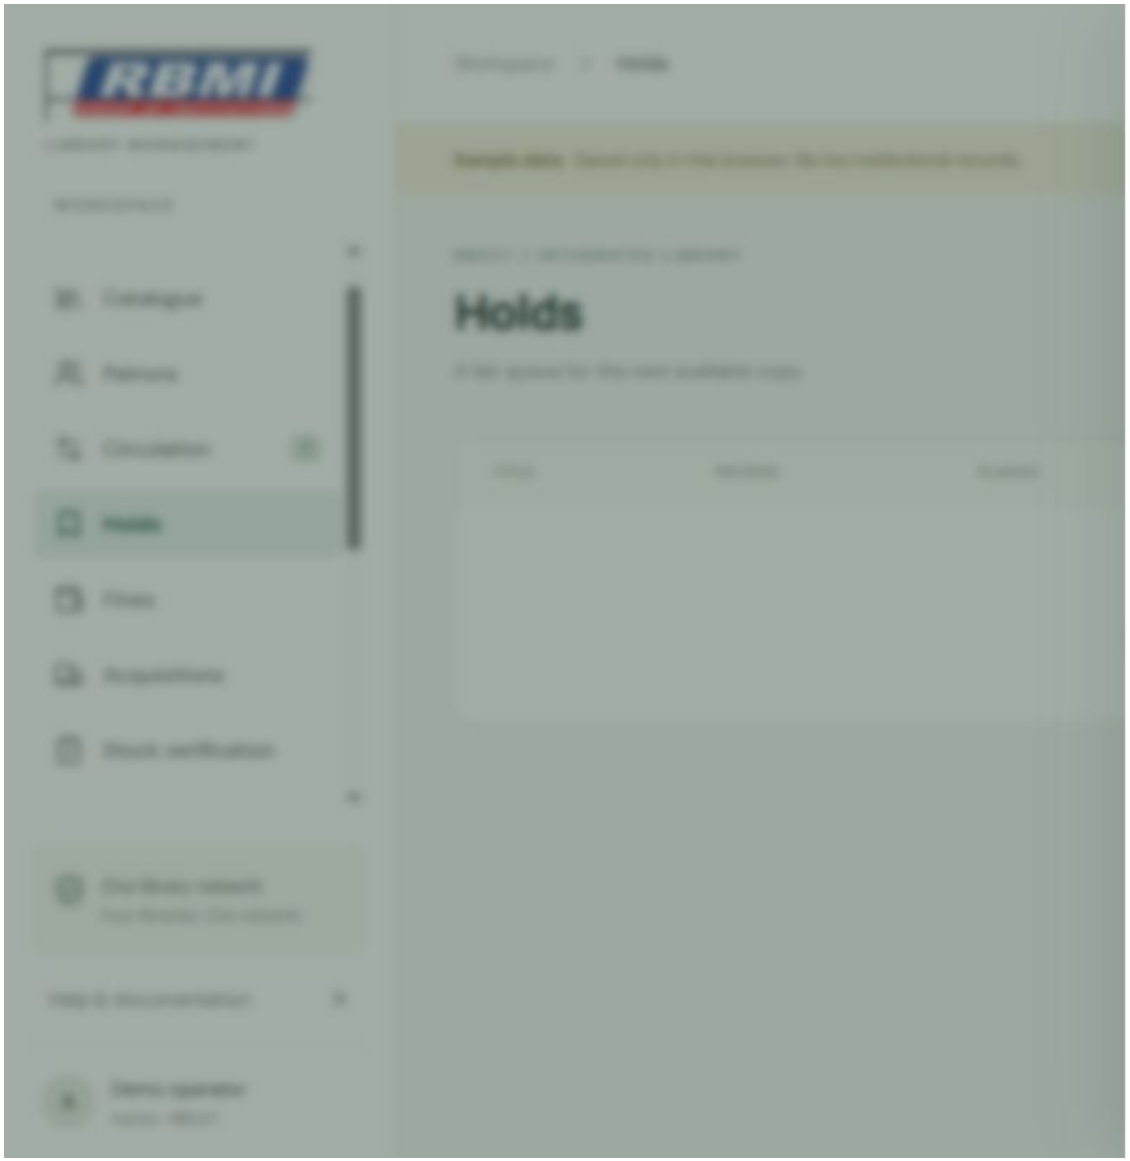

12 / Fine rules, payments and waivers

Fines are assessed on return, counting eligible dates after the due date through the return date under the issuing library calendar.

How to use this section

1. Admin opens Settings > Circulation policies to set loan days, maximum loans, renewals, daily fine, grace days, cap and blocking balance by category.

2. Add holidays in Settings. Weekend exclusion follows the saved policy. Holidays and explicit librarian-unavailable dates are excluded.

3. Subtract grace from eligible overdue days, floor at zero, multiply by daily rate and apply the cap. INR 2 times three eligible days minus one grace day equals INR 4.

4. Open Fines and inspect amount, paid, waived and remaining balance. Record Payment with a positive amount and receipt/reference.

5. Use Waiver with an authorized reason. Payment and waiver totals cannot exceed the assessed amount. Export and inspect the audit trail.


Notes and limits

Grace is counted in eligible days, not ordinary calendar days. Calendar changes do not recalculate posted historical charges.

Lost/damaged status does not automatically generate replacement-cost charges. Follow the institution's separate approval process.


12.1 / Fine rules, payments and waivers

A sample assessed fine appears after an overdue return. Review assessed, paid, waived and outstanding amounts. (Sample workspace)

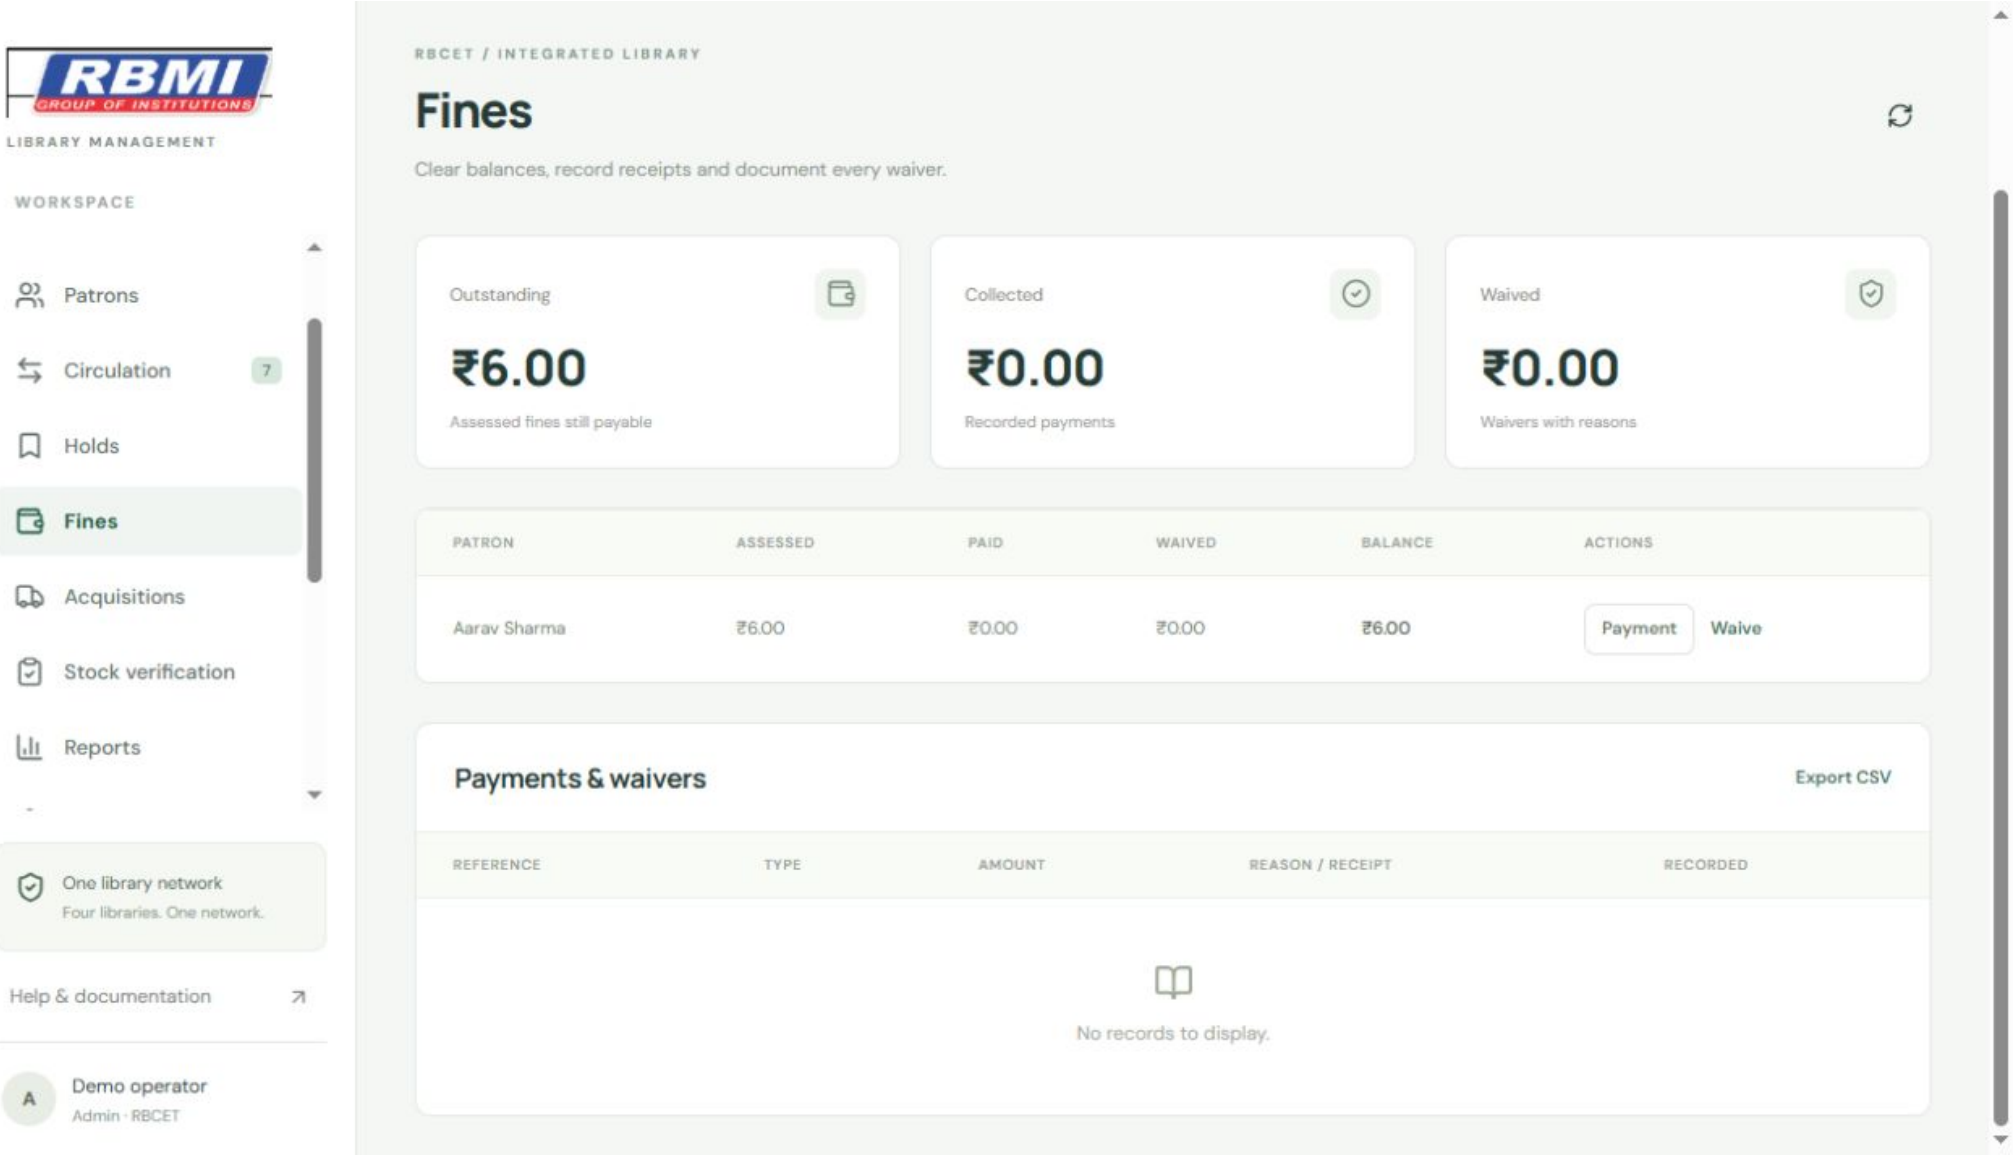

12.2 / Fine rules, payments and waivers

Payment records money already collected at the desk. Enter the amount and receipt/reference; waivers need an approval reason. (Sample workspace)

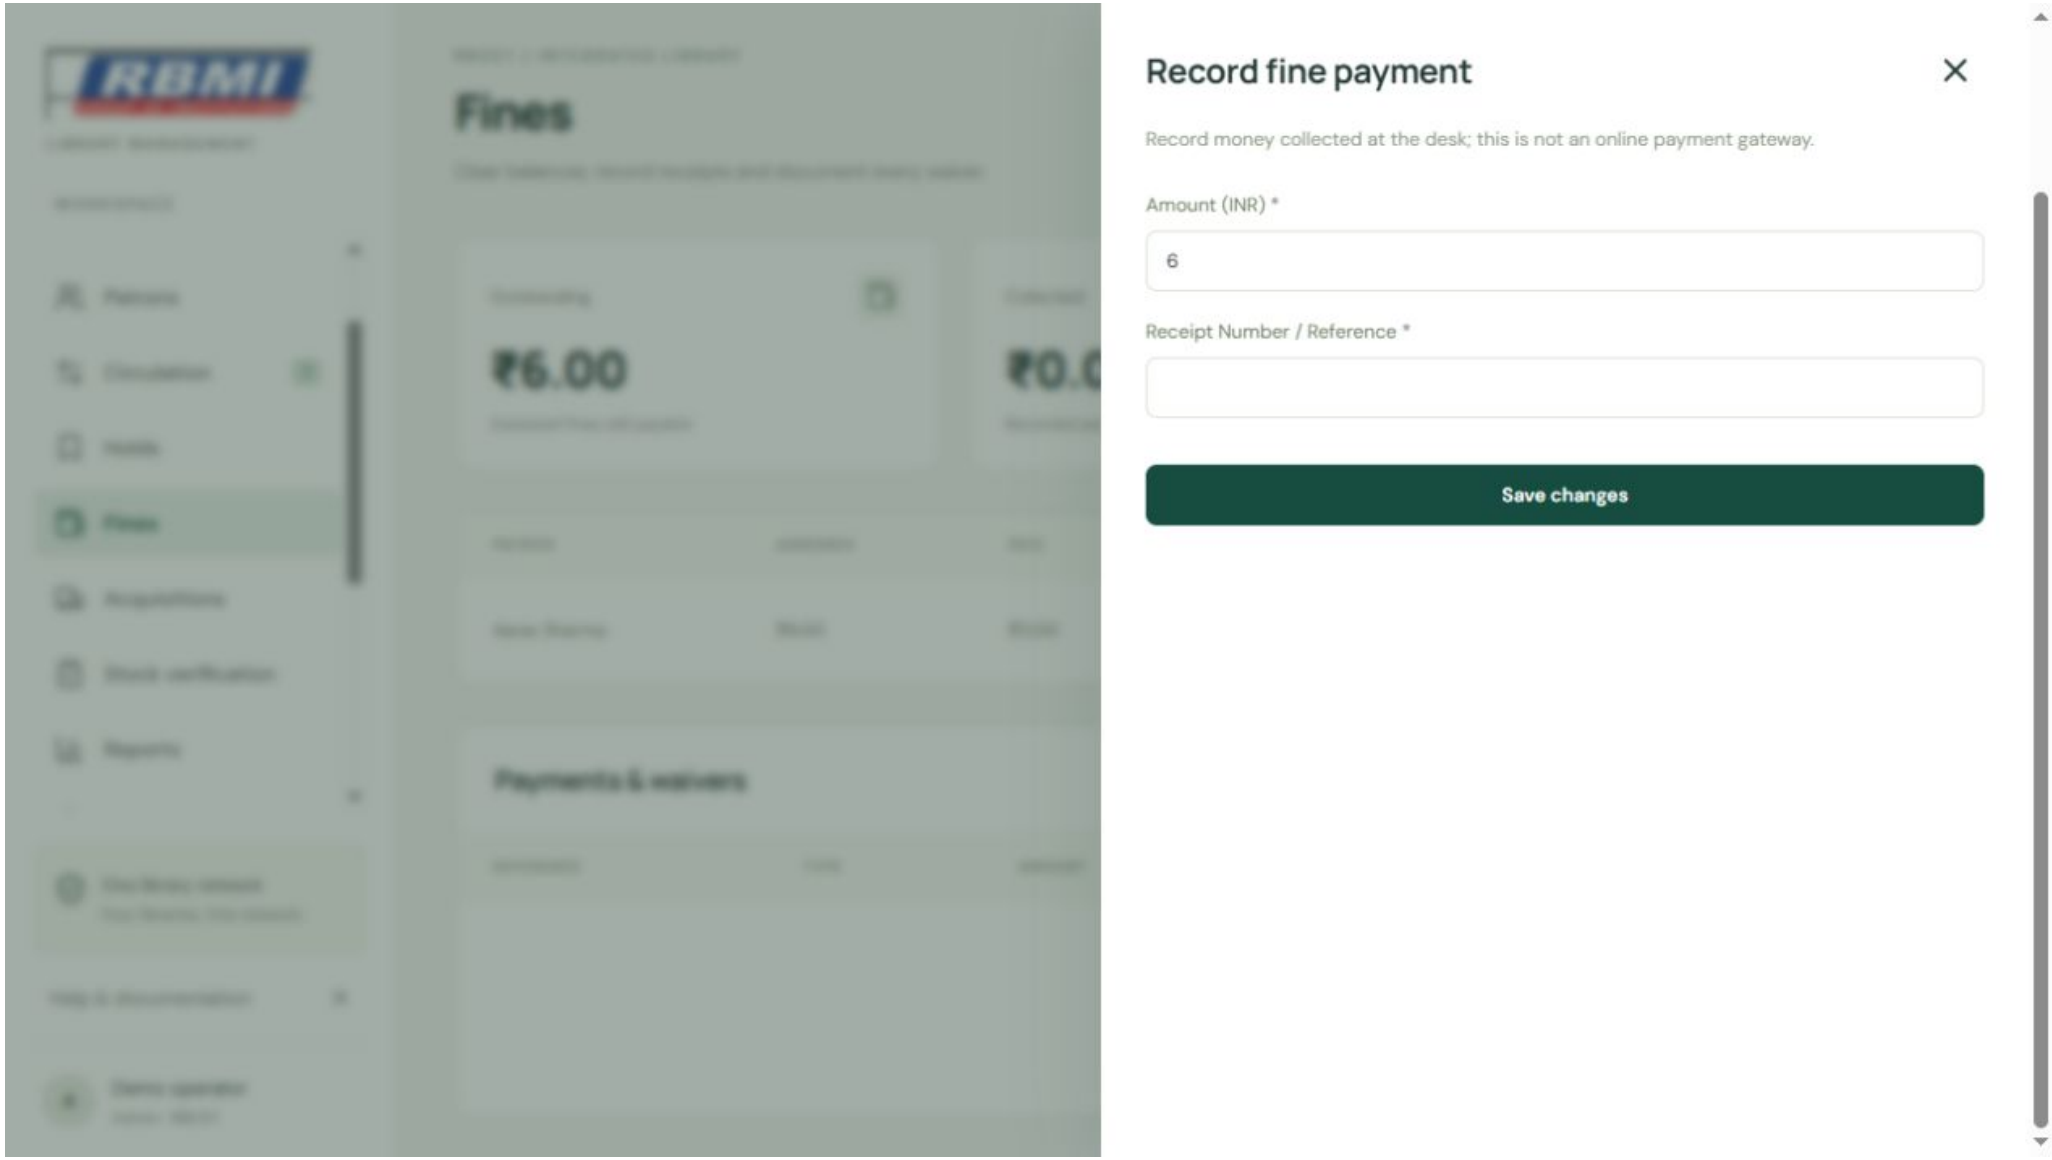

13 / Acquisitions, budgets, funds and baskets

Acquisitions track vendors, orders and full receipt of copies. Budget/fund and vendor-basket controls implement the targeted workflows from the supplied Koha manuals.

How to use this section

1. Add a vendor and the bibliographic title to purchase.

2. Create a dated budget and allocate funds with unique codes. Total fund allocations cannot exceed the budget.

3. Create a vendor basket if grouping purchases. Order with vendor, title, invoice, quantity and unit price; optionally select fund and basket.

4. For a funded order, the budget must be current, basket vendor must match and committed plus received value must fit the fund.

5. Receive an ordered acquisition once, supplying accession/barcode prefixes. Receipt creates the full ordered quantity atomically.

6. Review order status, receipt dates and fund commitments. Export orders for accounts reconciliation.


Notes and limits

Unfunded orders are permitted; operationally select the approved fund when budget control is required.

Partial receipt, EDI, foreign-currency conversion, accounting ledgers and hierarchical subfunds are outside this release.


13.1 / Acquisitions, budgets, funds and baskets

Manage budgets, funds, baskets and purchase orders within the selected library. (Sample workspace)

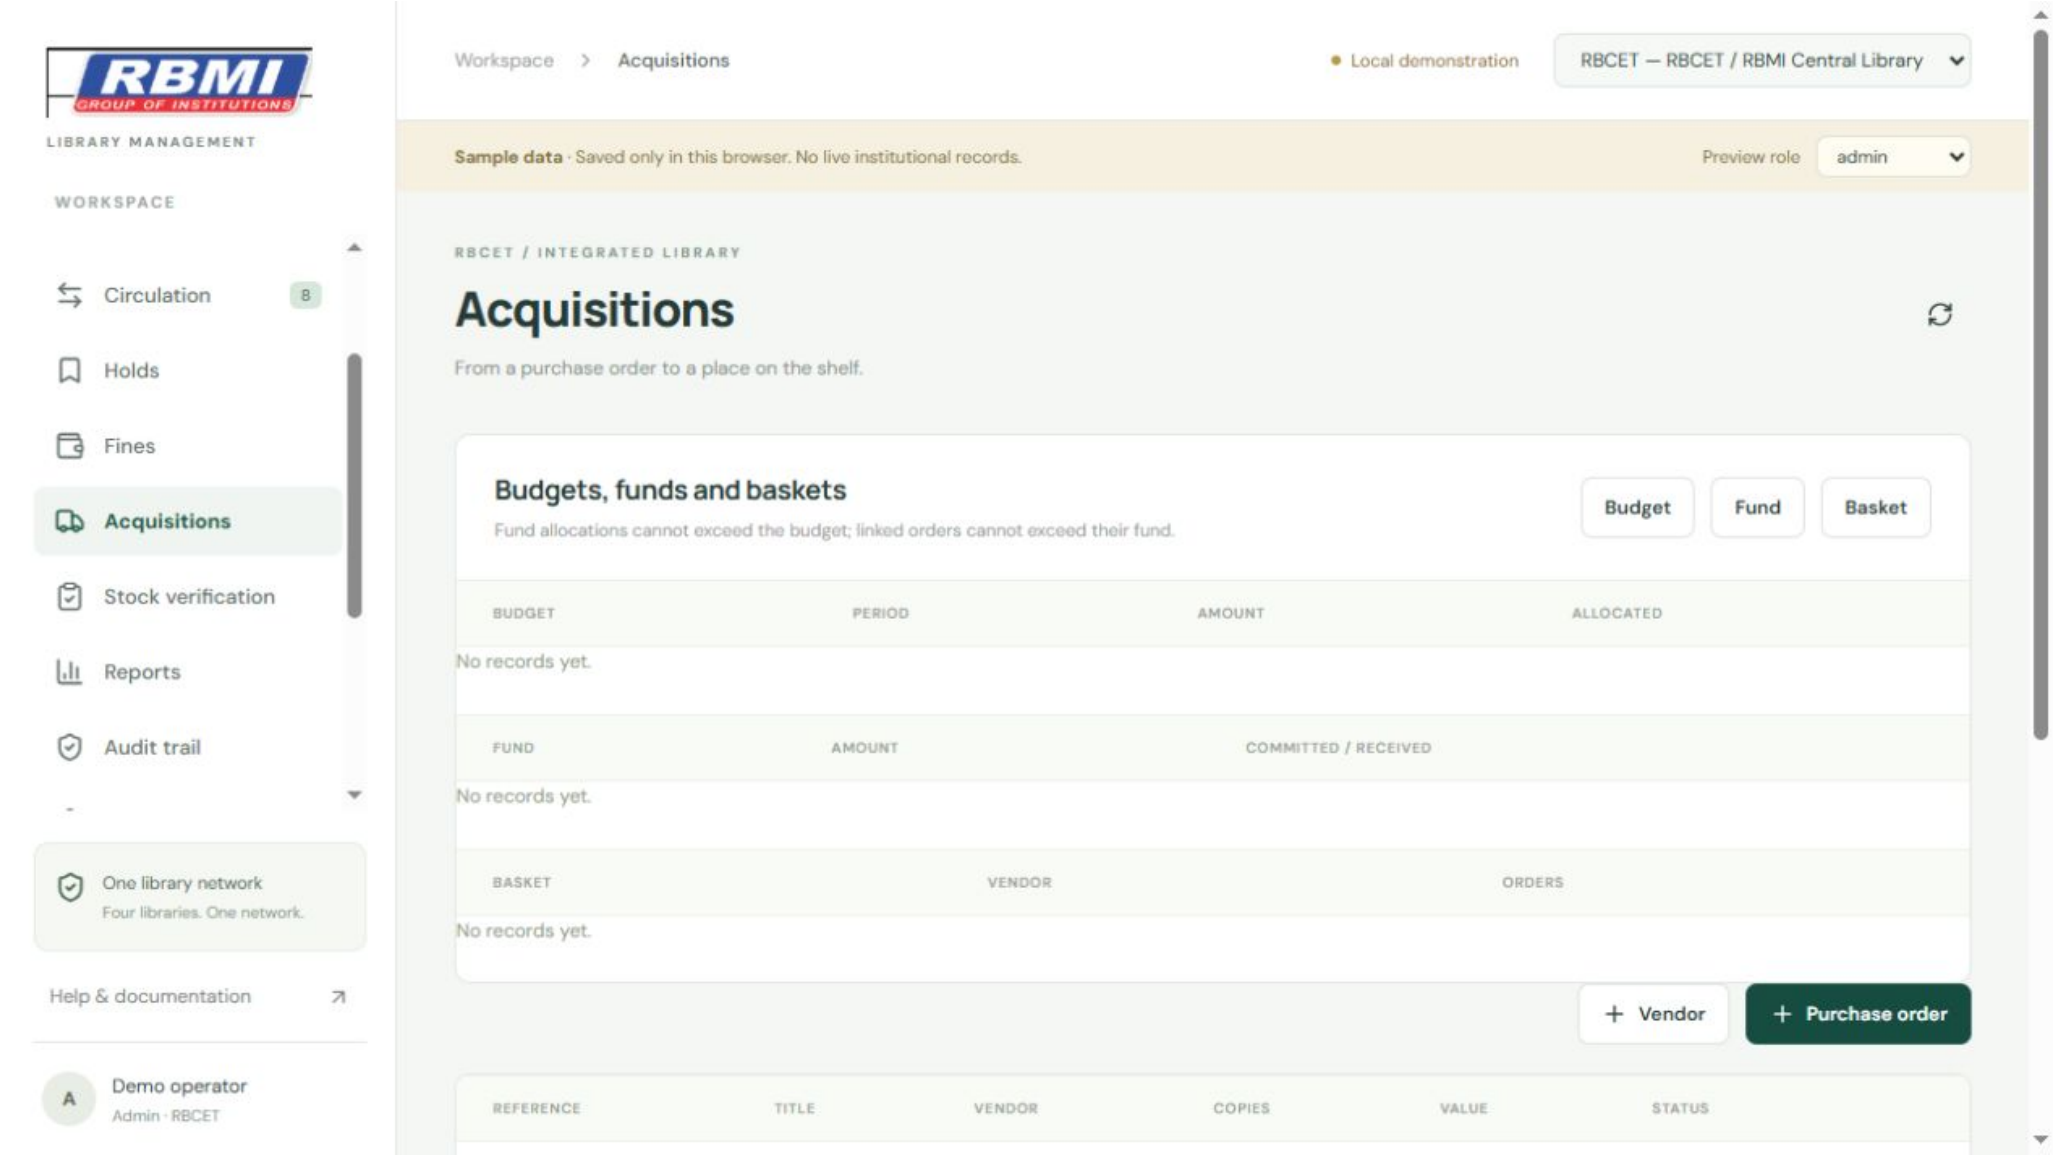

13.2 / Acquisitions, budgets, funds and baskets

Choose the vendor, title, optional fund/basket, quantity and invoice reference before saving the order. (Sample workspace)

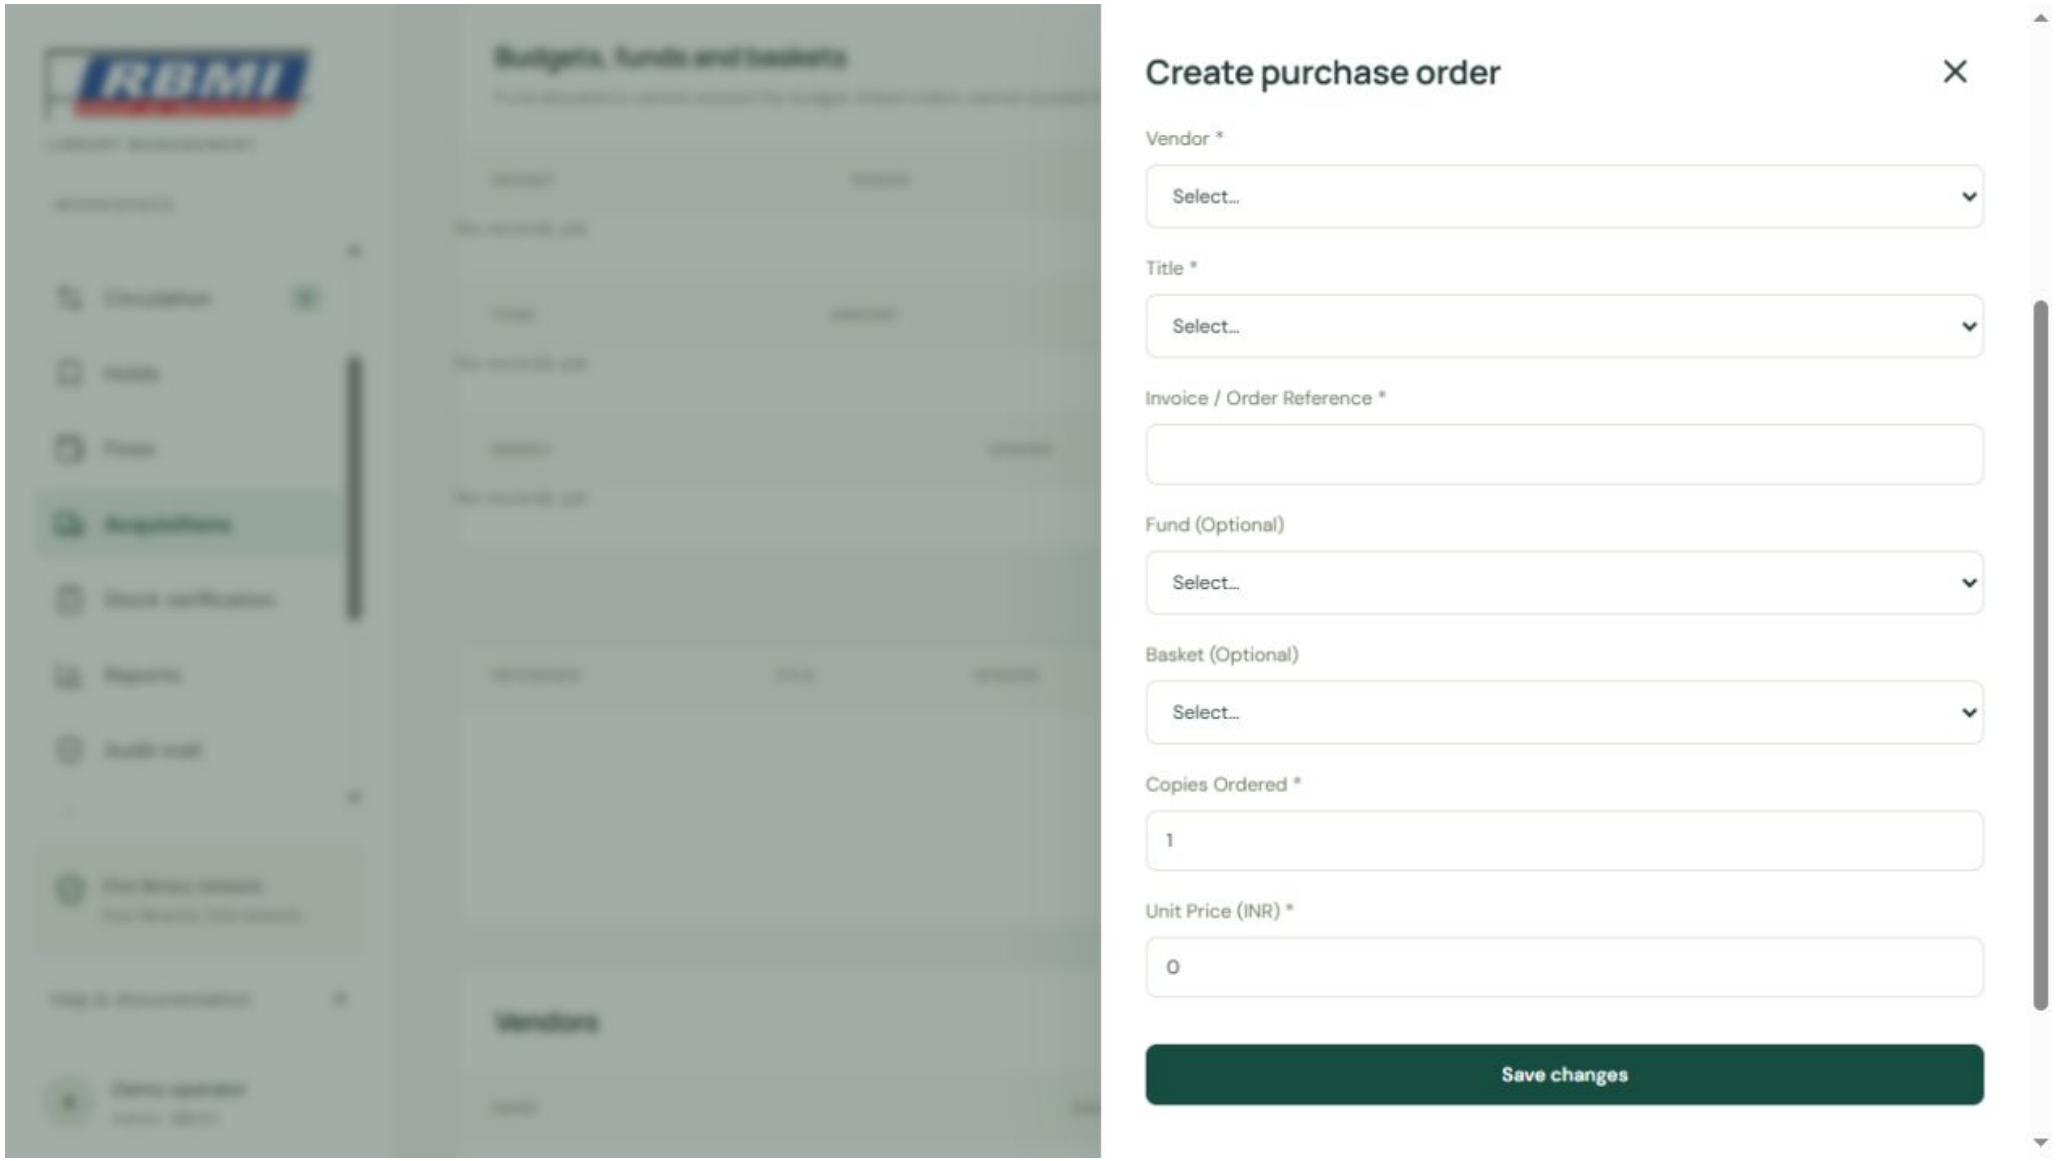

14 / Authority control

Authorities standardize personal names, corporate names and subjects and link them to bibliographic titles in the same library.

How to use this section

1. Open Authorities and create a personal, corporate or subject heading with preferred text and optional variants/notes.

2. Review spelling and punctuation to avoid duplicate standardized headings.

3. Use Link title to associate the heading with a local title. Cross-library associations are rejected.

4. Inspect linked titles while maintaining a heading and use available edit controls for corrections.


Notes and limits

This is a local heading/link workflow.

Full authority MARC editing, external harvesting and automatic global heading replacement are not implemented.


14.1 / Authority control

Authority control standardizes names and subjects. Use Add authority, then Link title to connect records. (Sample workspace)

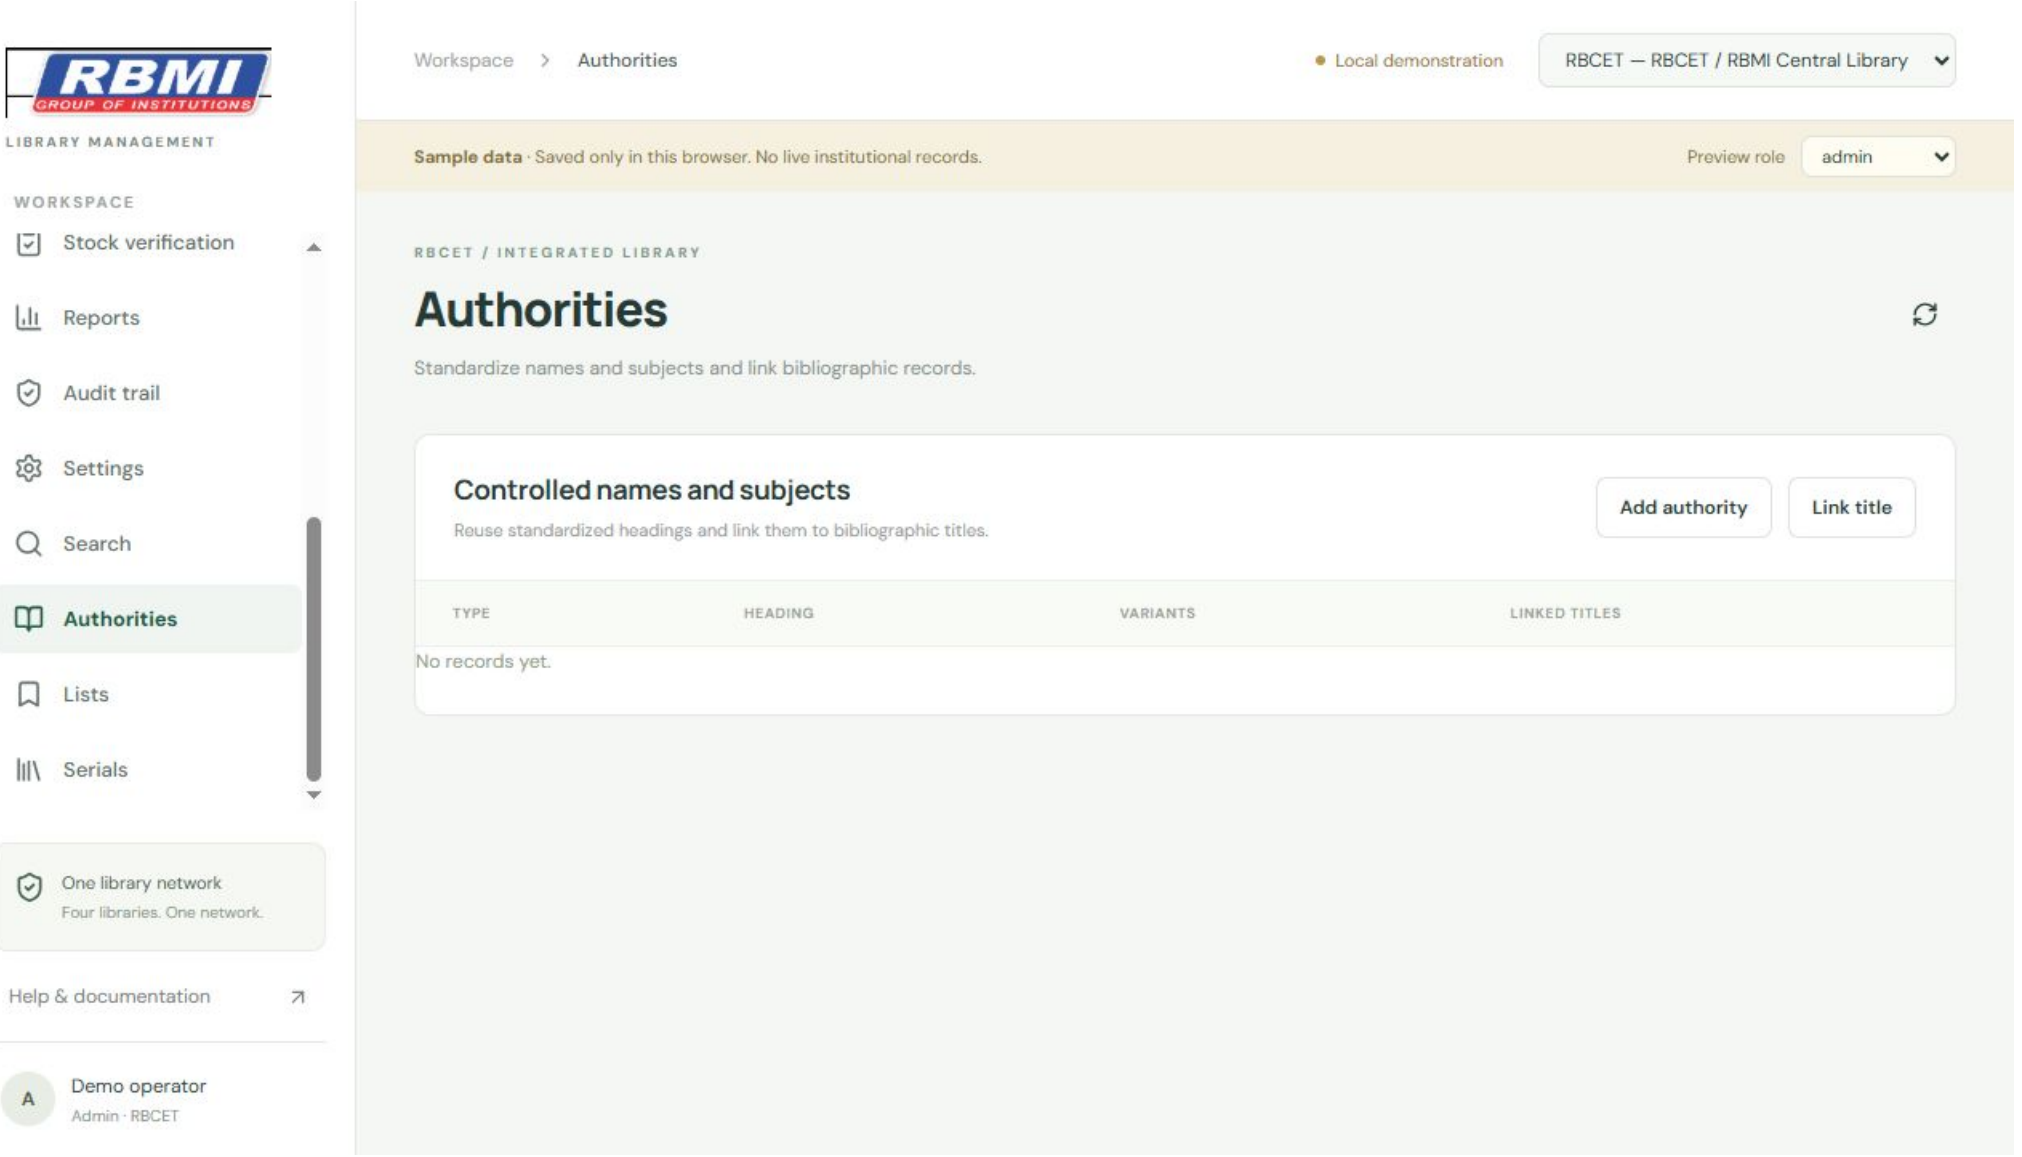

14.2 / Authority control

Choose the authority type, enter its heading and add useful variants or notes. (Sample workspace)

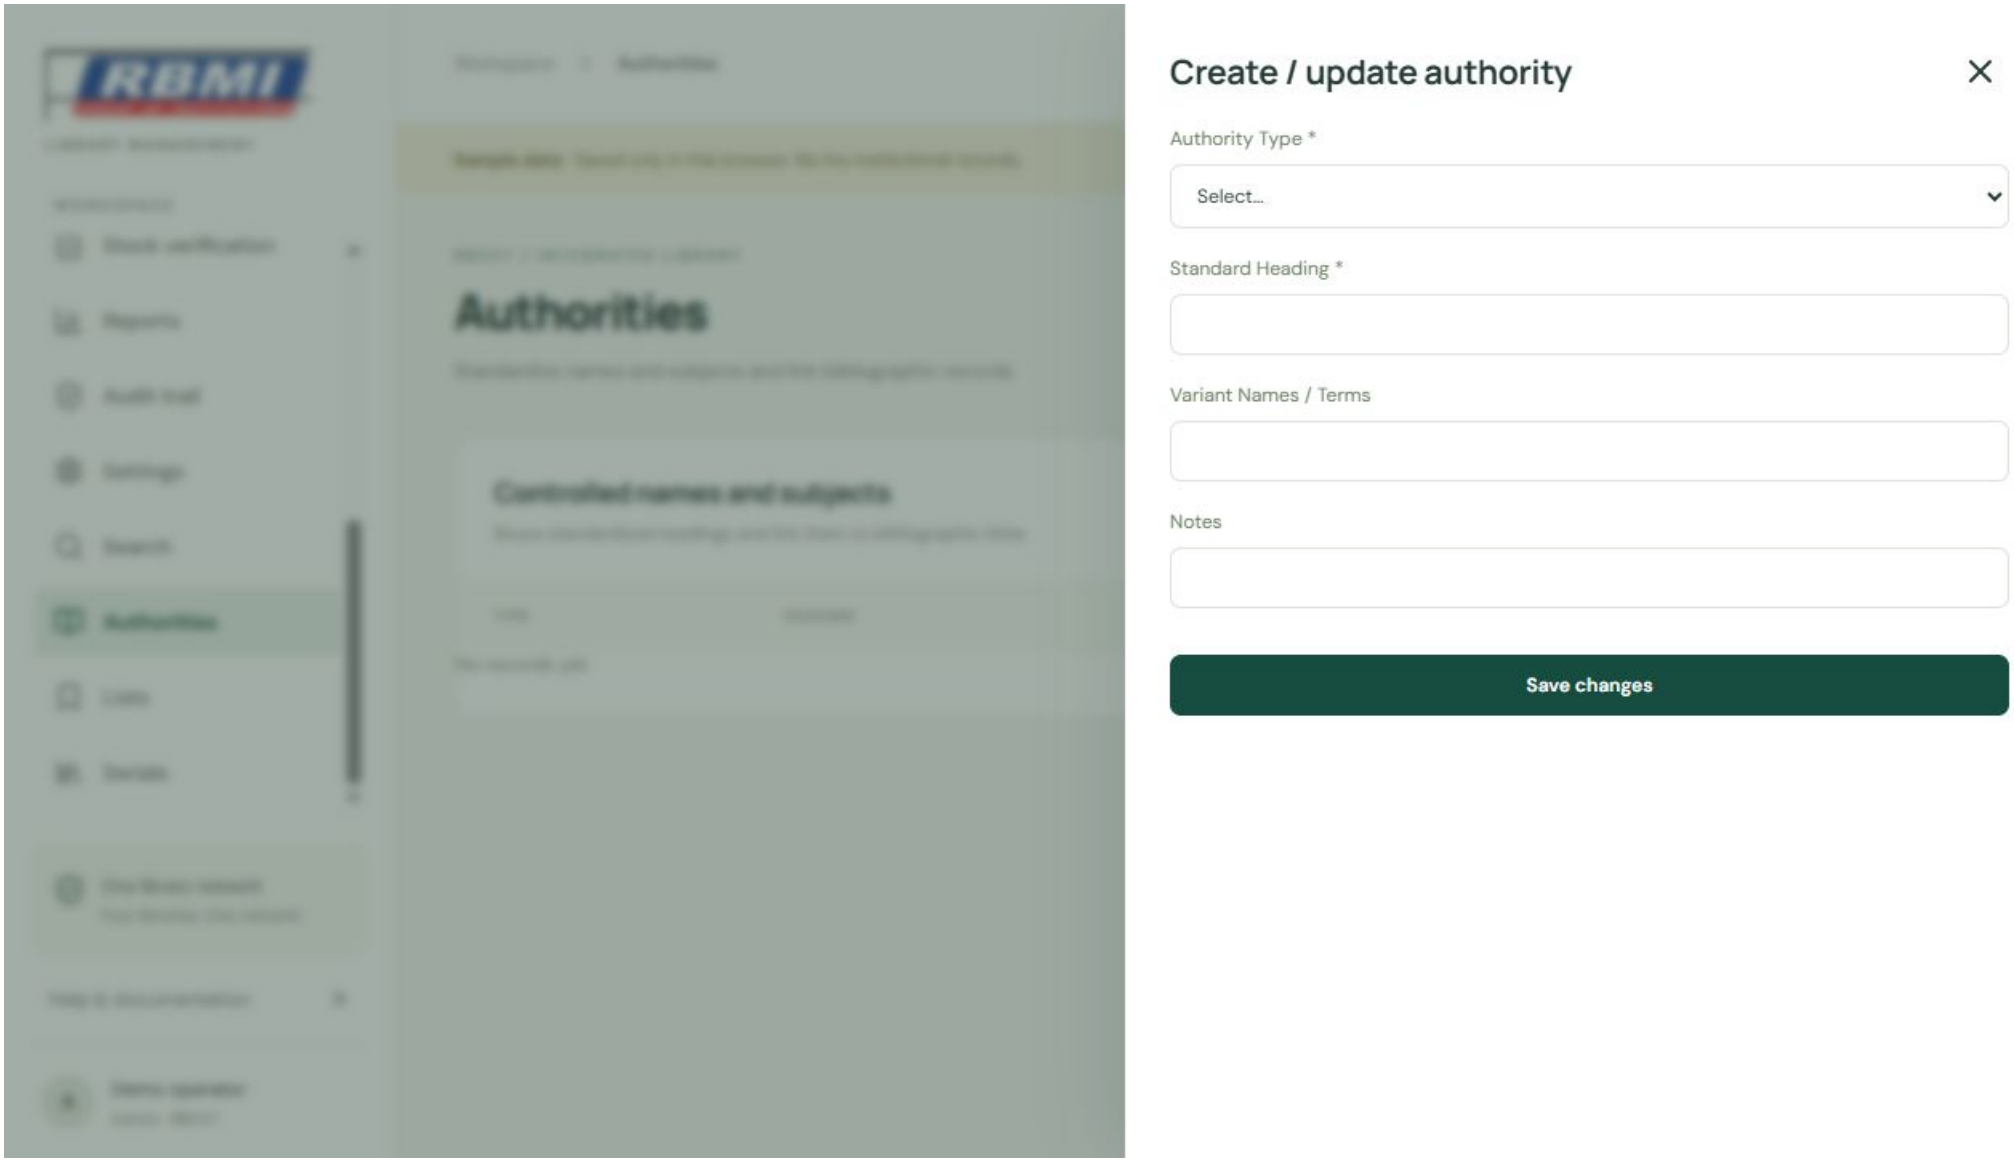

15 / Private and public reading lists

Lists collect titles for study or display. Private lists belong to their owner; public lists are visible to authenticated users in the same library.

How to use this section

1. Open Lists and create a name with private or public visibility.
2. Choose titles to add and the offered sort option. Only the owner can add or remove entries.
3. Review list contents and remove unwanted titles.
4. Use Holds separately to reserve a title for borrowing.


Notes and limits

Public list visibility is library-scoped and authenticated; it is separate from the anonymous OPAC cart.

Lists do not reserve physical copies and do not bypass circulation rules.

15.1 / Private and public reading lists

Create a reading list, choose its visibility and add titles. Private lists remain restricted to their owner. (Sample workspace)

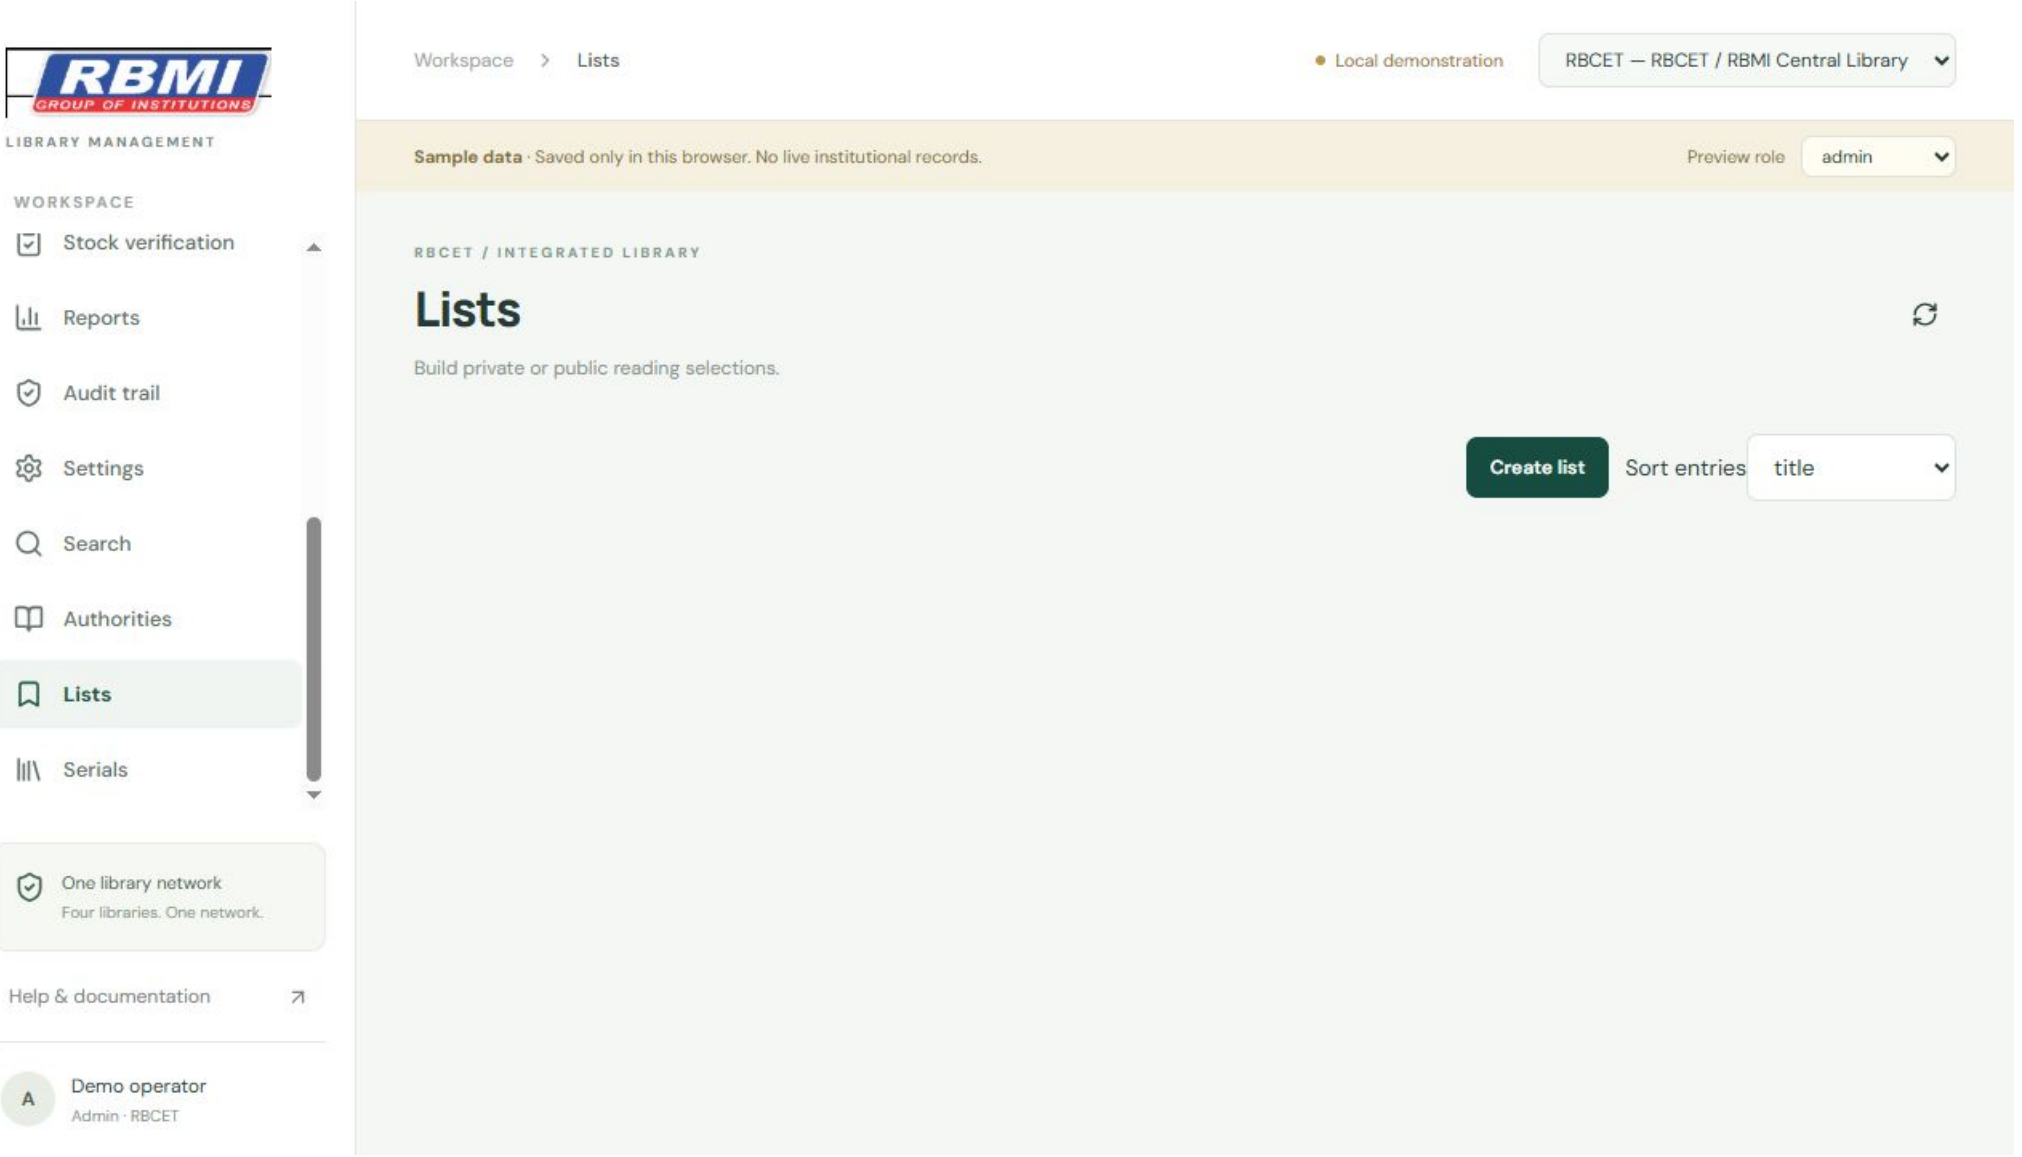

16 / Serial subscriptions and receiving

Serials manage journal subscriptions, expected issues and arrival states, separately from ordinary physical-copy circulation.

How to use this section

1. Create a subscription with title, frequency, first issue date and predicted issue count.
2. Select weekly, monthly, quarterly or yearly. Generate at most 120 issues per subscription.
3. Review expected dates/numbers. An anchor date of 31 January predicts 28 February and then 31 March.
4. Mark issues arrived, late or missing. Arrived issues store the receiving date.
5. Use statuses and expected dates for manual follow-up and reporting.


Notes and limits

Predictions do not send vendor claims automatically.

Irregular calendars, automated claims, routing and automatic circulating-item creation are outside this release. Create ordinary catalogue copies separately if needed.


16.1 / Serial subscriptions and receiving

Add subscription begins the journal/periodical workflow; predicted issues appear after the subscription is saved. (Sample workspace)

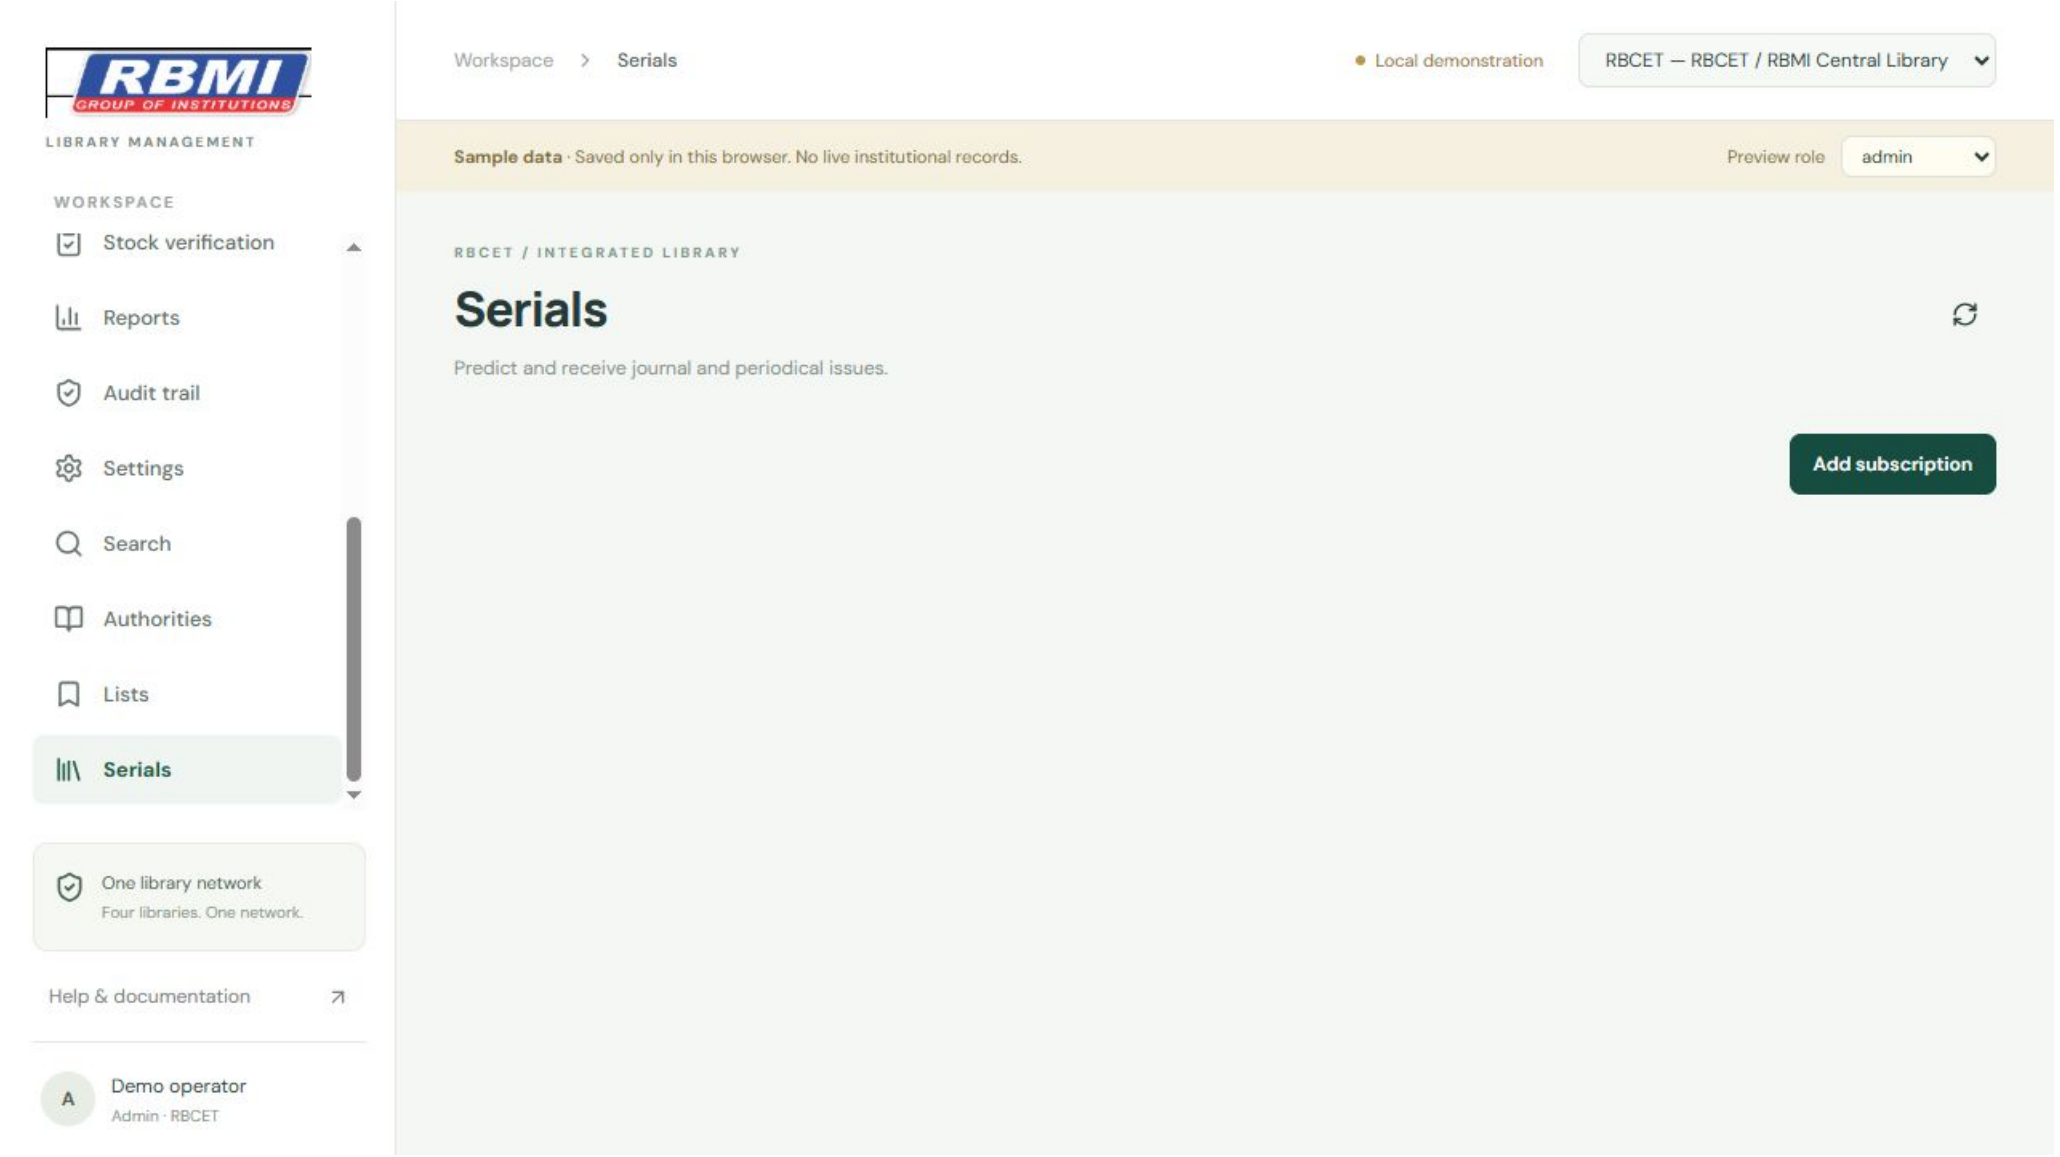

16.2 / Serial subscriptions and receiving

Enter the journal title, frequency, start date and issue count. Review predictions and mark issues received or missing. (Sample workspace)

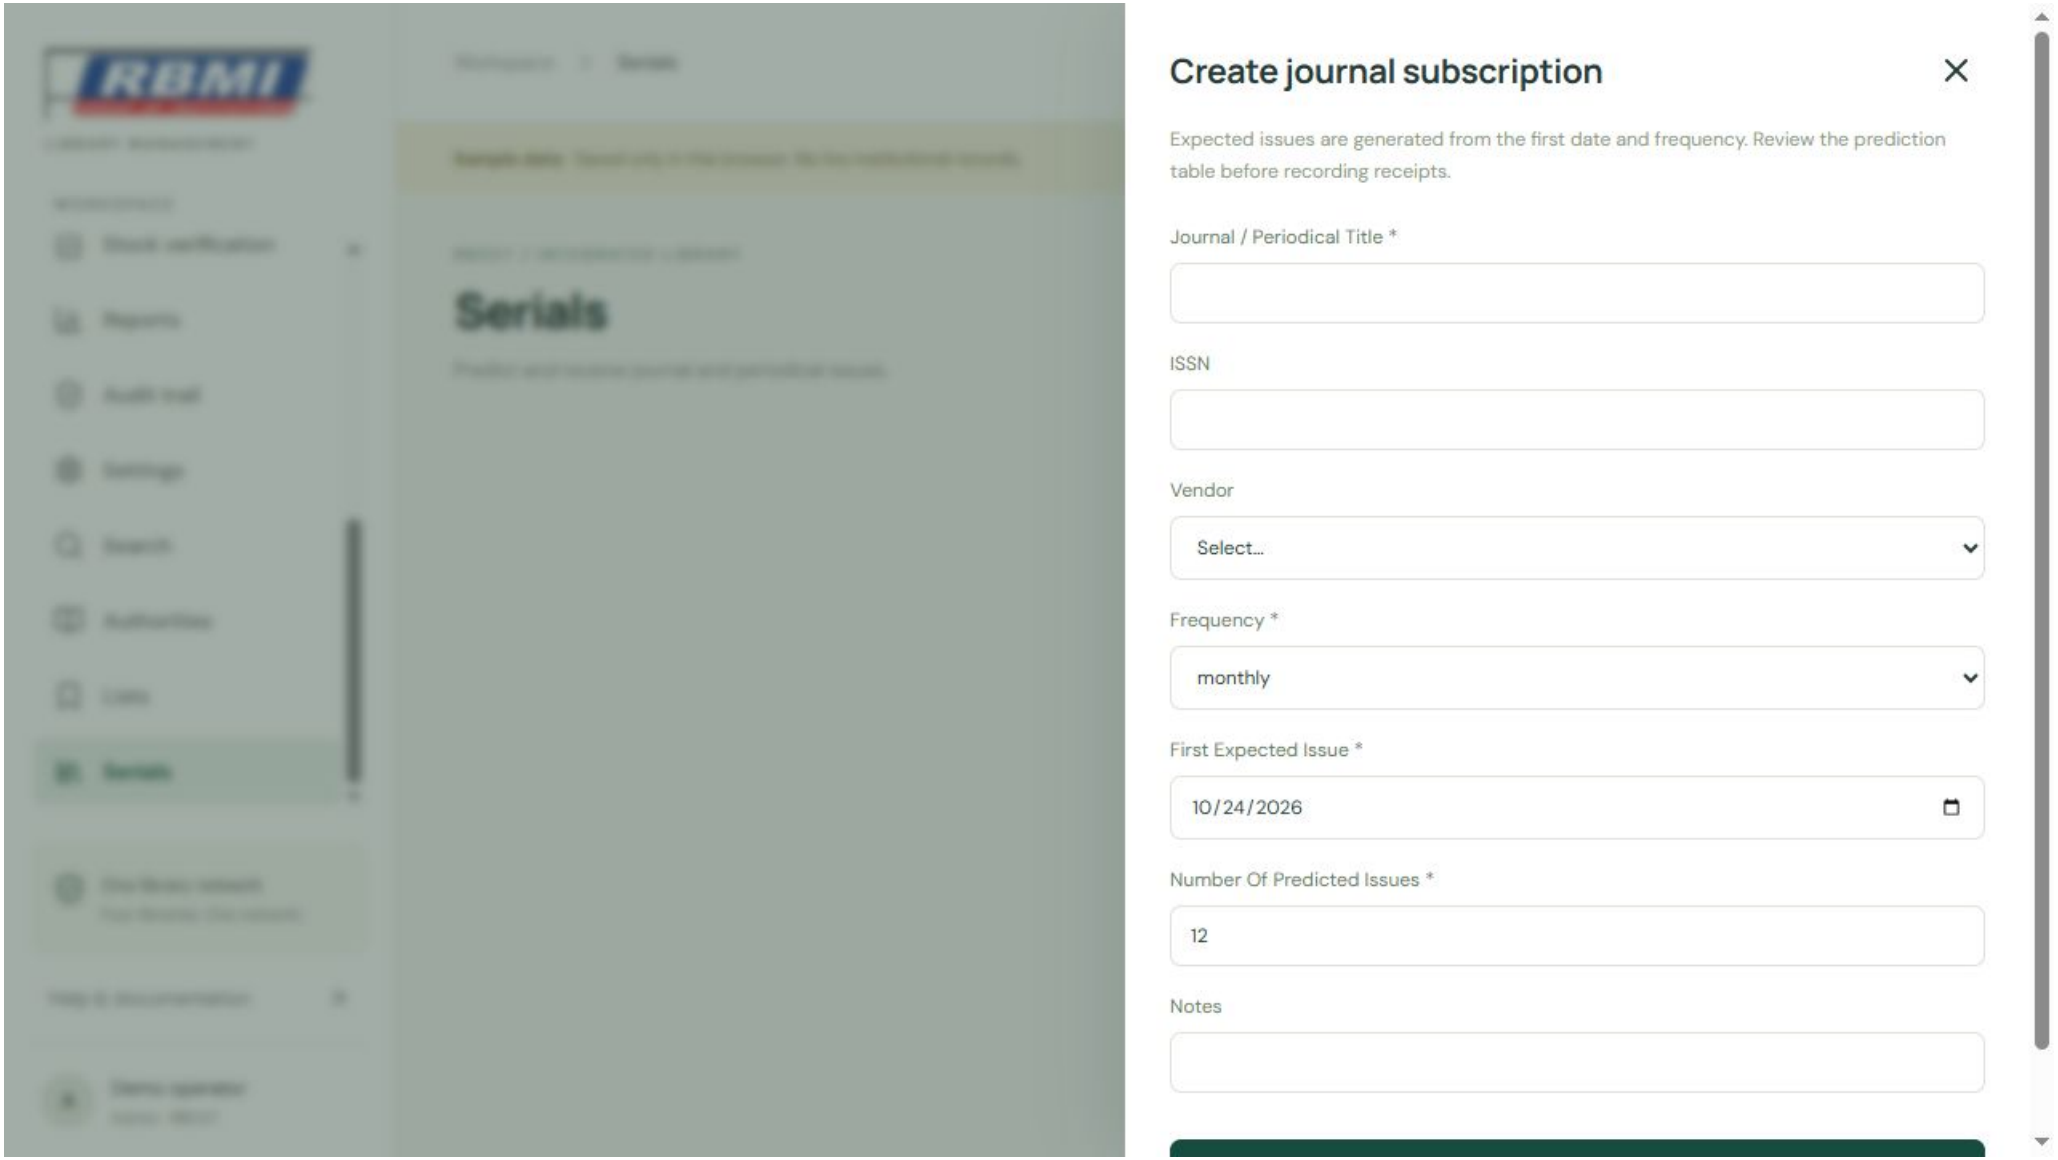

17 / Advanced catalogue and item search

Search combines text terms with physical-copy condition and recorded checkout history in the selected library.

How to use this section

1. Choose title, author, ISBN, subject, classification, barcode, accession or shelf as the search field.

2. Enter one or two terms. AND requires both, OR accepts either and NOT excludes the second term in the selected field.

3. Filter by available, loaned, lost, damaged, missing or withdrawn status.

4. Use Checkout count at most and Last checkout on/before for low-use analysis. Never-issued copies have no last date and remain eligible for the date filter.

5. Review the first 100 rows or export all matches to CSV.


Notes and limits

This is a simple Boolean filter, not a full search-engine query language.

A stock spreadsheet does not contain historical circulation. Imported copies start at zero recorded checkouts until issued in this application.

17.1 / Advanced catalogue and item search

Combine bibliographic, item-status and checkout filters. The result grid and CSV export reflect the chosen criteria. (Sample workspace)

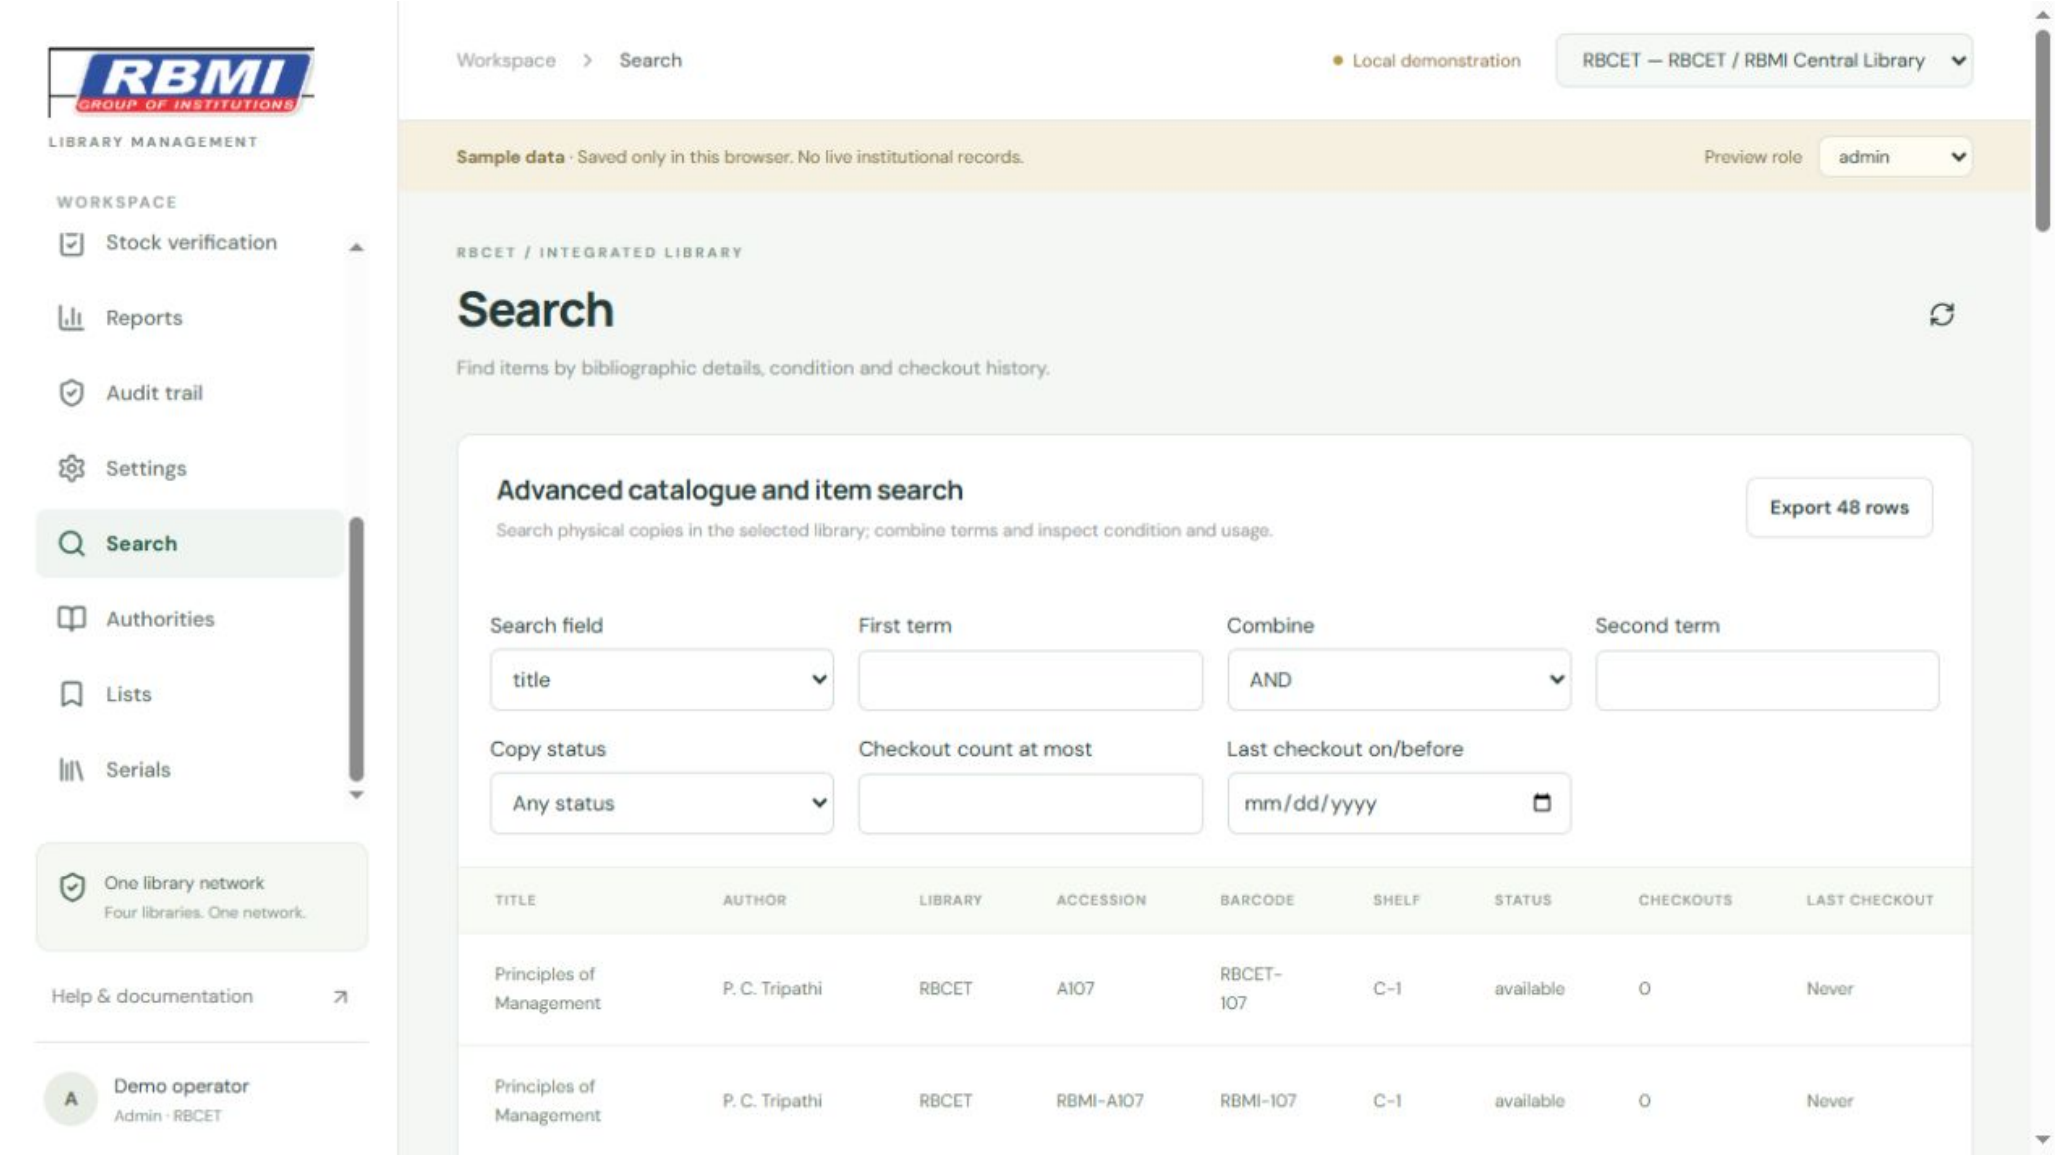

18 / Public catalogue and temporary cart

Open Browse public catalogue or https://rbmi-ilms.vercel.app/?opac=1 without a staff account.

How to use this section

1. Select a library and search title, author, ISBN or subject.

2. Review publisher/year, classification and exact availability totals. Only a small preview of physical copies is shown on each title card.

3. Use Previous titles / Next titles to browse. Select Browse physical copies, then First copies / Next copies to read accession, shelf and status in pages of 50. Add titles to the temporary cart and print the selection/catalogue page.

4. Return through Staff / reader sign in. Linked patrons manage their own loans and holds only after authentication.


Notes and limits

Anonymous data contains library names, bibliographic records and limited holdings. It excludes patron details, accounts, prices, fines and audit history.

Cart selections are temporary and reset on refresh. Purchase suggestions, reviews, tags, ratings and anonymous holds are outside this release.

18.1 / Public catalogue and temporary cart

Title cards show exact availability counts with limited copy previews. Browse physical copies and Previous / Next controls load bounded pages. (Sample workspace)

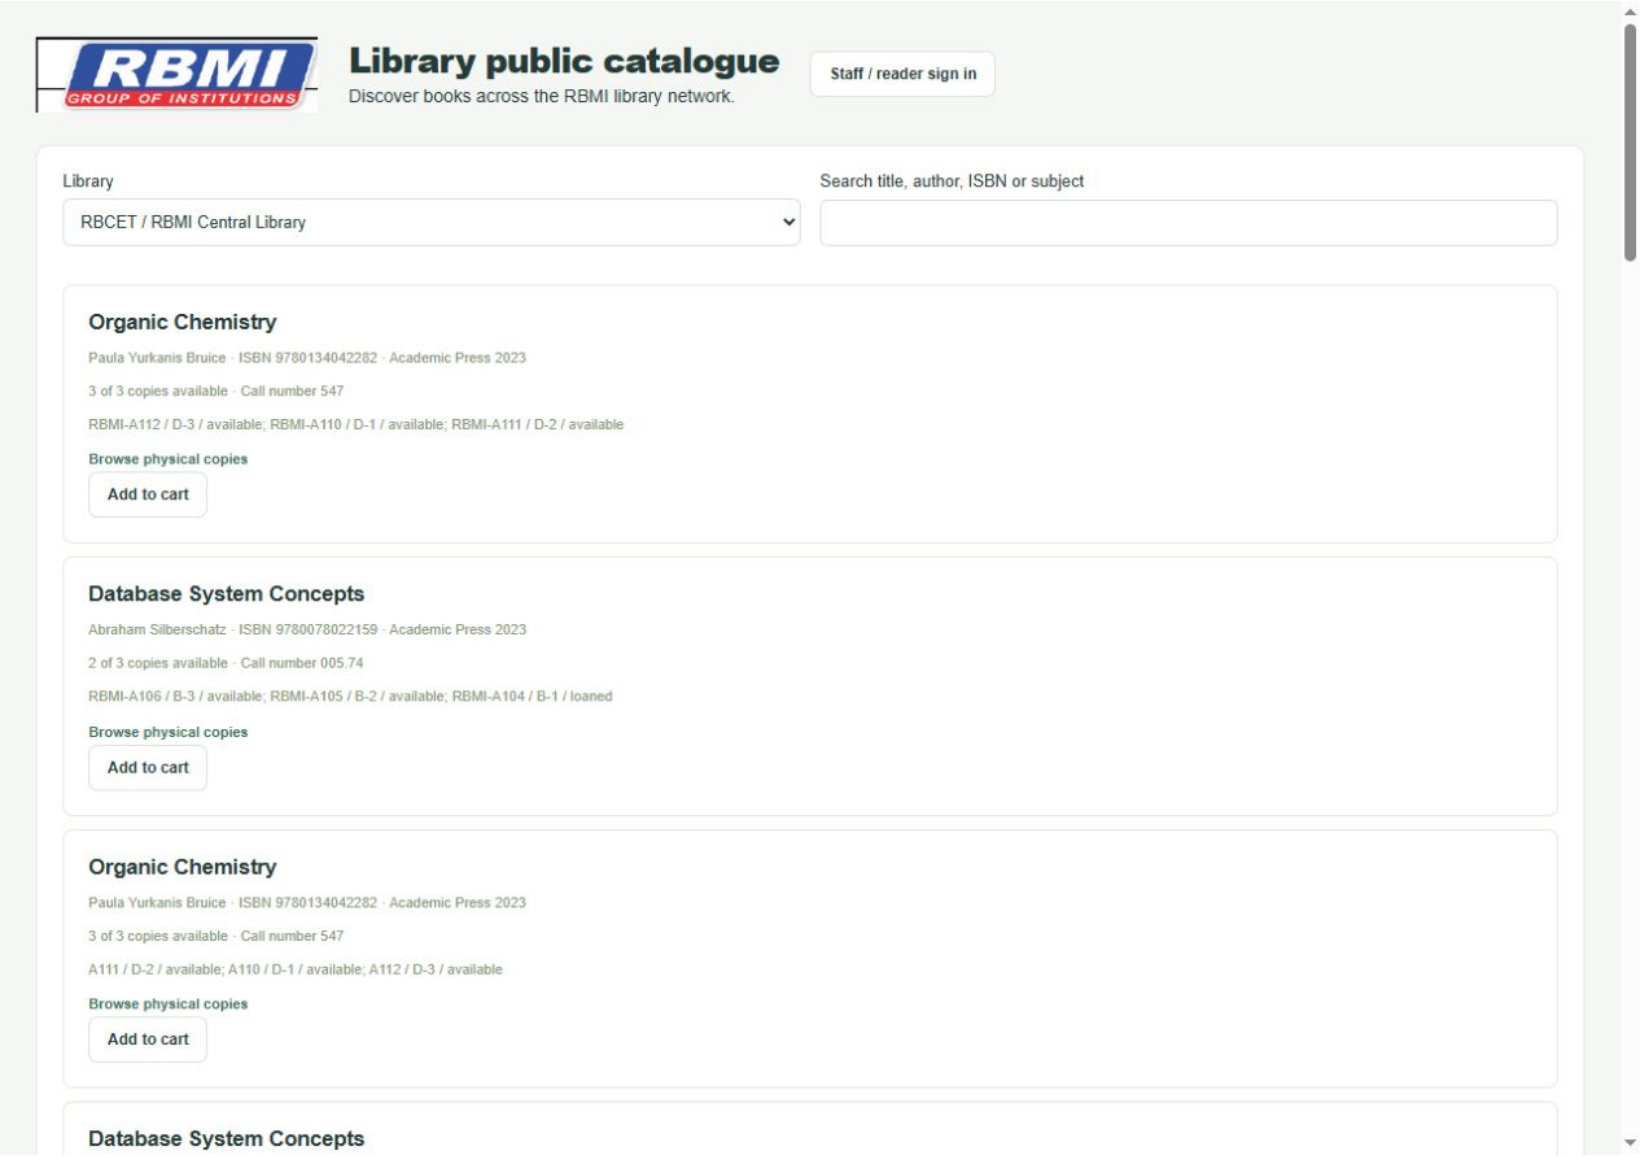

19 / Stock verification

Stock verification compares scanned barcodes with a fixed collection snapshot. One open session is allowed per library.

How to use this section

1. Open Stock verification and create a named session for the selected library.
2. Scan copies against the session. Repeated scans do not add duplicate expected records.
3. Review seen and unseen items, especially copies that were already on loan at session start.
4. Investigate discrepancies before closing. Confirm closure and inspect resulting copy statuses.
5. Export findings for approval. Correct later copy status through Catalogue with a reason.


Notes and limits

The expected inventory is fixed at session creation; reconcile later acquisitions and circulation separately.

Do not classify every unscanned item as permanently lost without physical and circulation checks.


19.1 / Stock verification

Start session creates an inventory snapshot. Existing sessions later show scan progress and discrepancies. (Sample workspace)

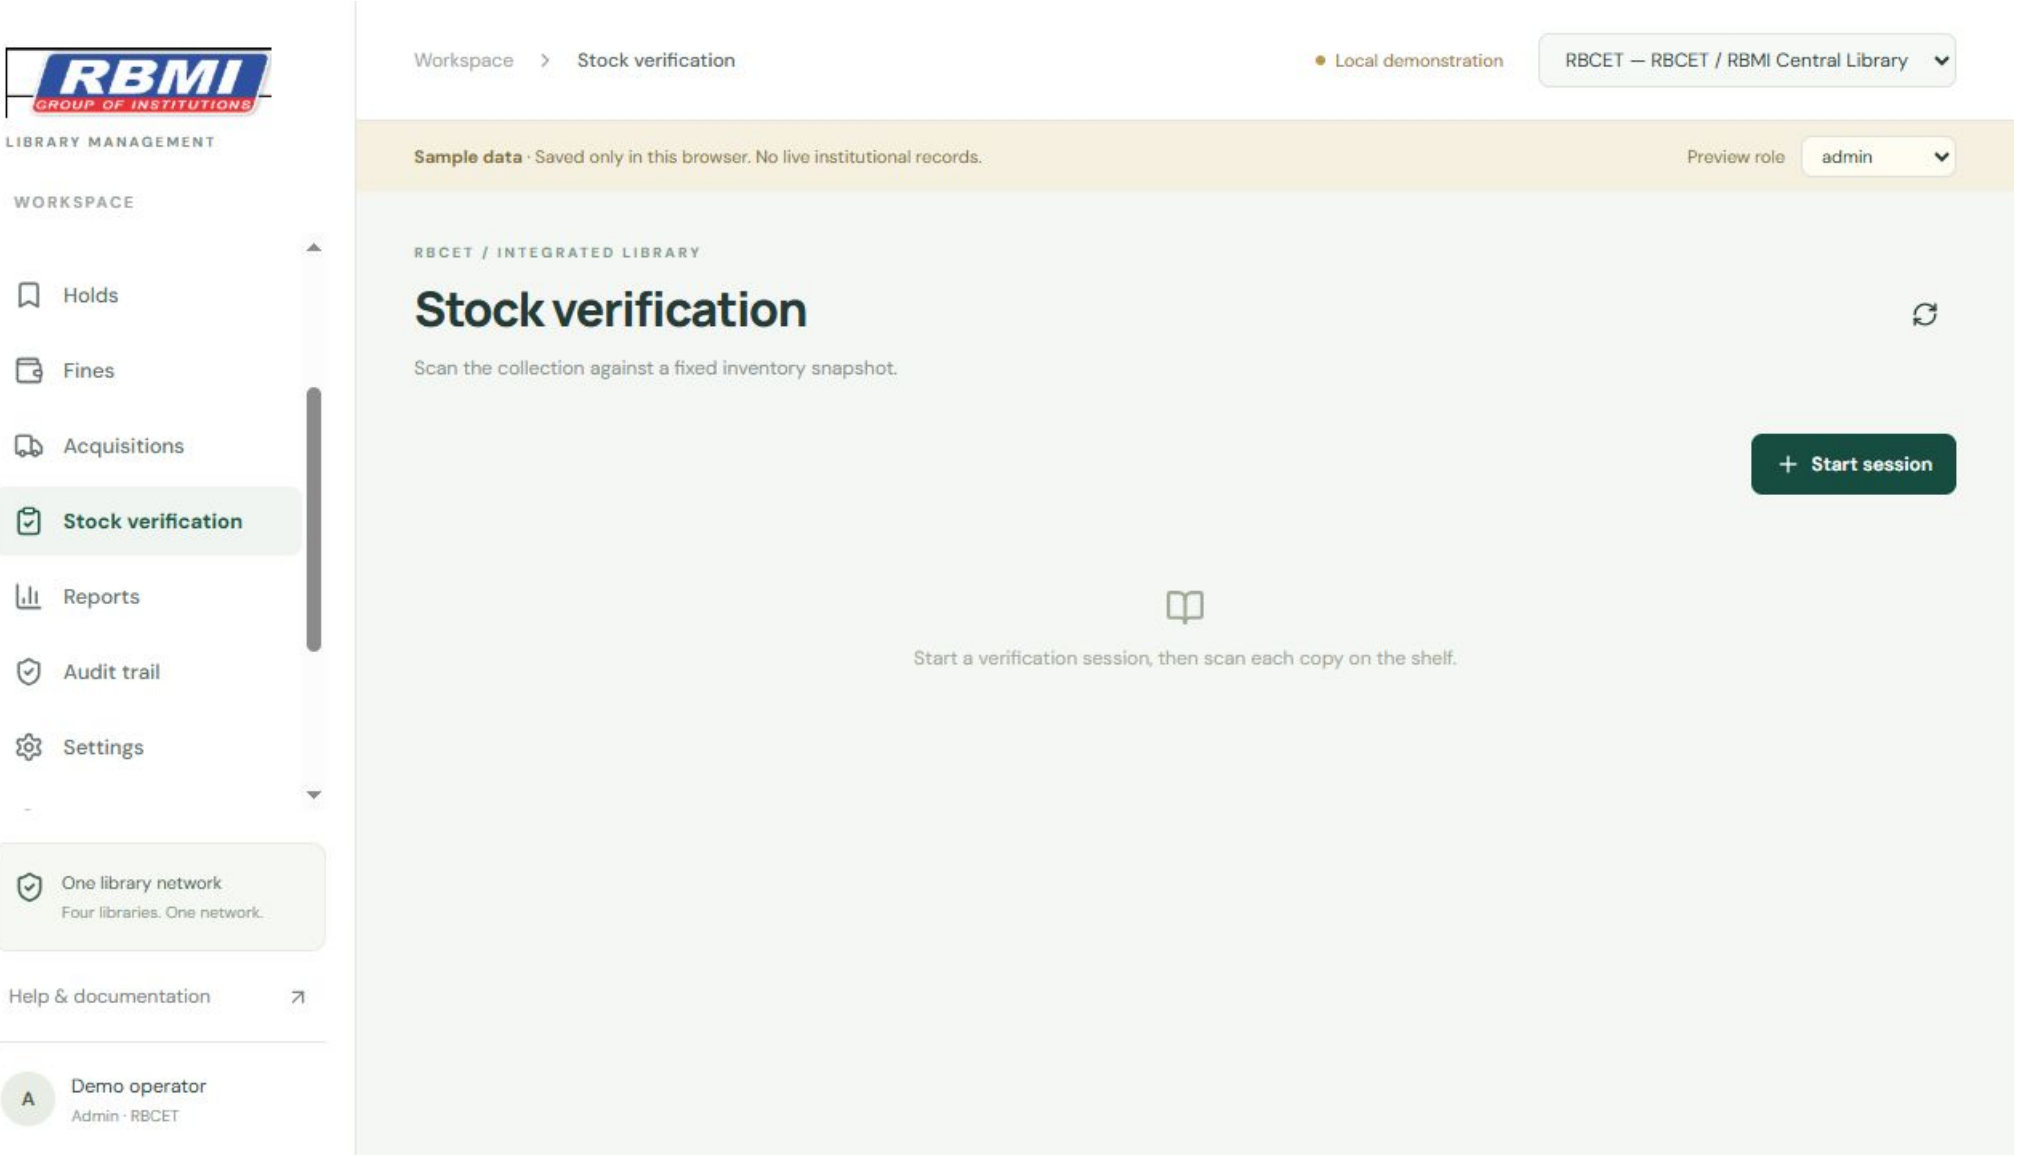

19.2 / Stock verification

Give the stock-verification session a clear name, start it, then scan copies against that snapshot. (Sample workspace)

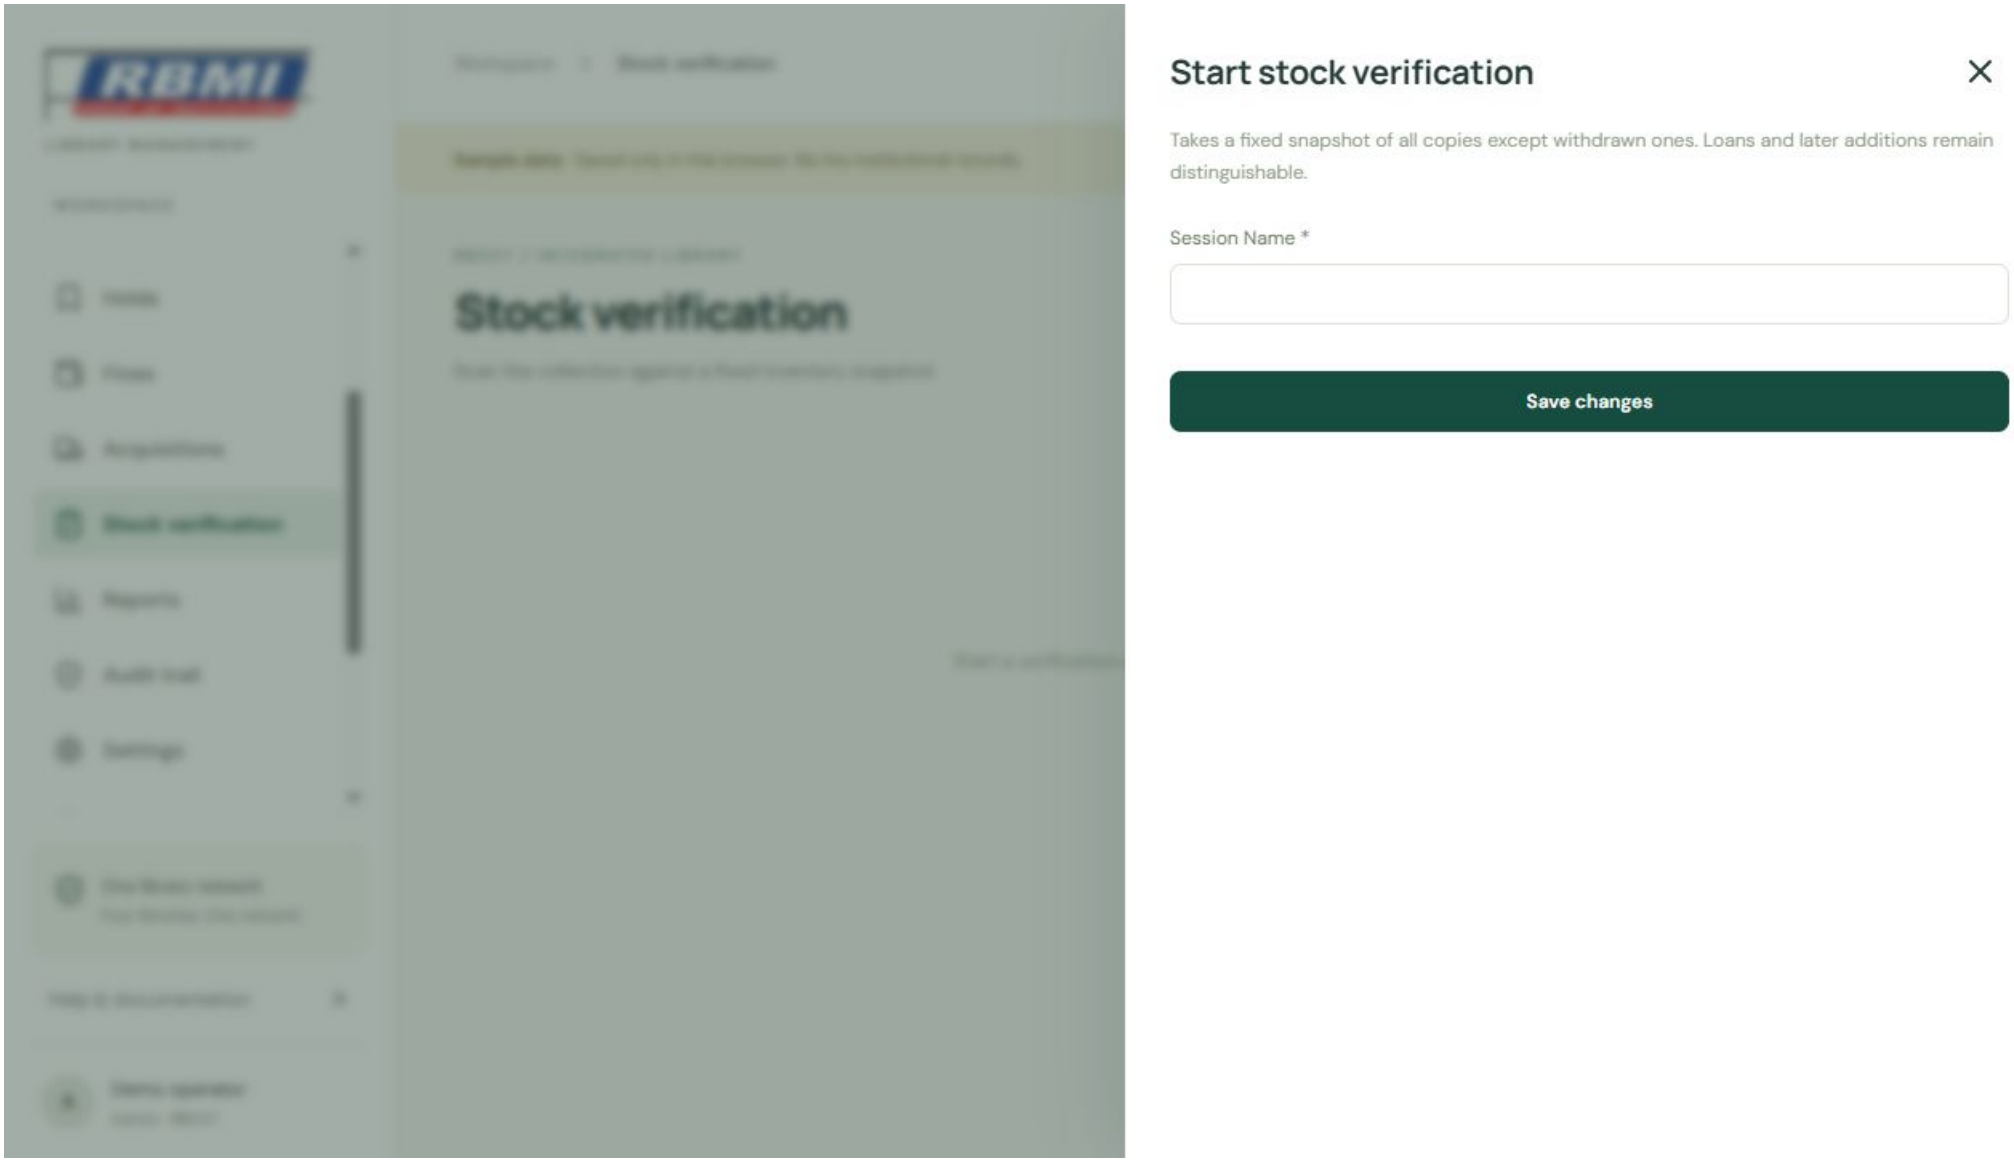

20 / Reports and saved definitions

Reports can be viewed inside the application or downloaded as PDF or CSV. Every report uses the selected library. Standard reports cover the collection, circulation history, overdue loans, fines, patrons, acquisitions and most borrowed titles.

How to use this section

1. Select the correct library at the top, open Reports, and choose View report on a standard report card. The report opens on the same page; downloading a file is optional.

2. Use Search this report to narrow the rows. Choose 25, 50 or 100 rows per page and use Previous page / Next page. Use the horizontal scrollbar to read columns that extend beyond the screen.

3. Select Export PDF or Export CSV in the open report to export every matching row across all pages. Export buttons on a report card download the complete unfiltered report.

4. PDF includes the library code/name, report title, generation time in IST, row count, repeated column headings and page numbers. Wide tables can continue columns on another page; use the repeated # column to match rows.

5. For large PDFs, a progress message shows pages prepared. You can keep using the page or select Cancel PDF. Search before exporting if you only need a subset of records.

6. To create a saved report, select Create report, enter its name and dataset, and optionally set From / To dates. Date limits apply to loans, acquisitions and journal issues. Collection, patron and fine datasets are current snapshots.

7. Choose Run / view report beside a saved definition. Its results open in the same viewer, with search, pagination, PDF and CSV options. Applied date limits also appear in the PDF.

8. If no records match, the viewer states that clearly and PDF exports show zero matching records. Refresh data using the main refresh button after colleagues make changes.

Notes and limits

Exports include all matching records, not just the page on screen. Search is across the displayed report columns.


Complete reports are fetched on demand through bounded database pages; the smaller workspace preview is never used as a complete register. CSV and PDF contain the same matching rows and exclude passwords and authentication secrets.

PDF files are prepared in the browser. Completed exports can contain private institutional records; share them only with authorized people.

Report preparation can be cancelled. Exports stop with an explicit error if a dataset exceeds 50,000 records; use a saved report with narrower dates instead of accepting a partial file.


20.1 / Reports and saved definitions

Each standard report offers View report, Export CSV and Export PDF. Choose the library before opening a report. (Sample workspace)

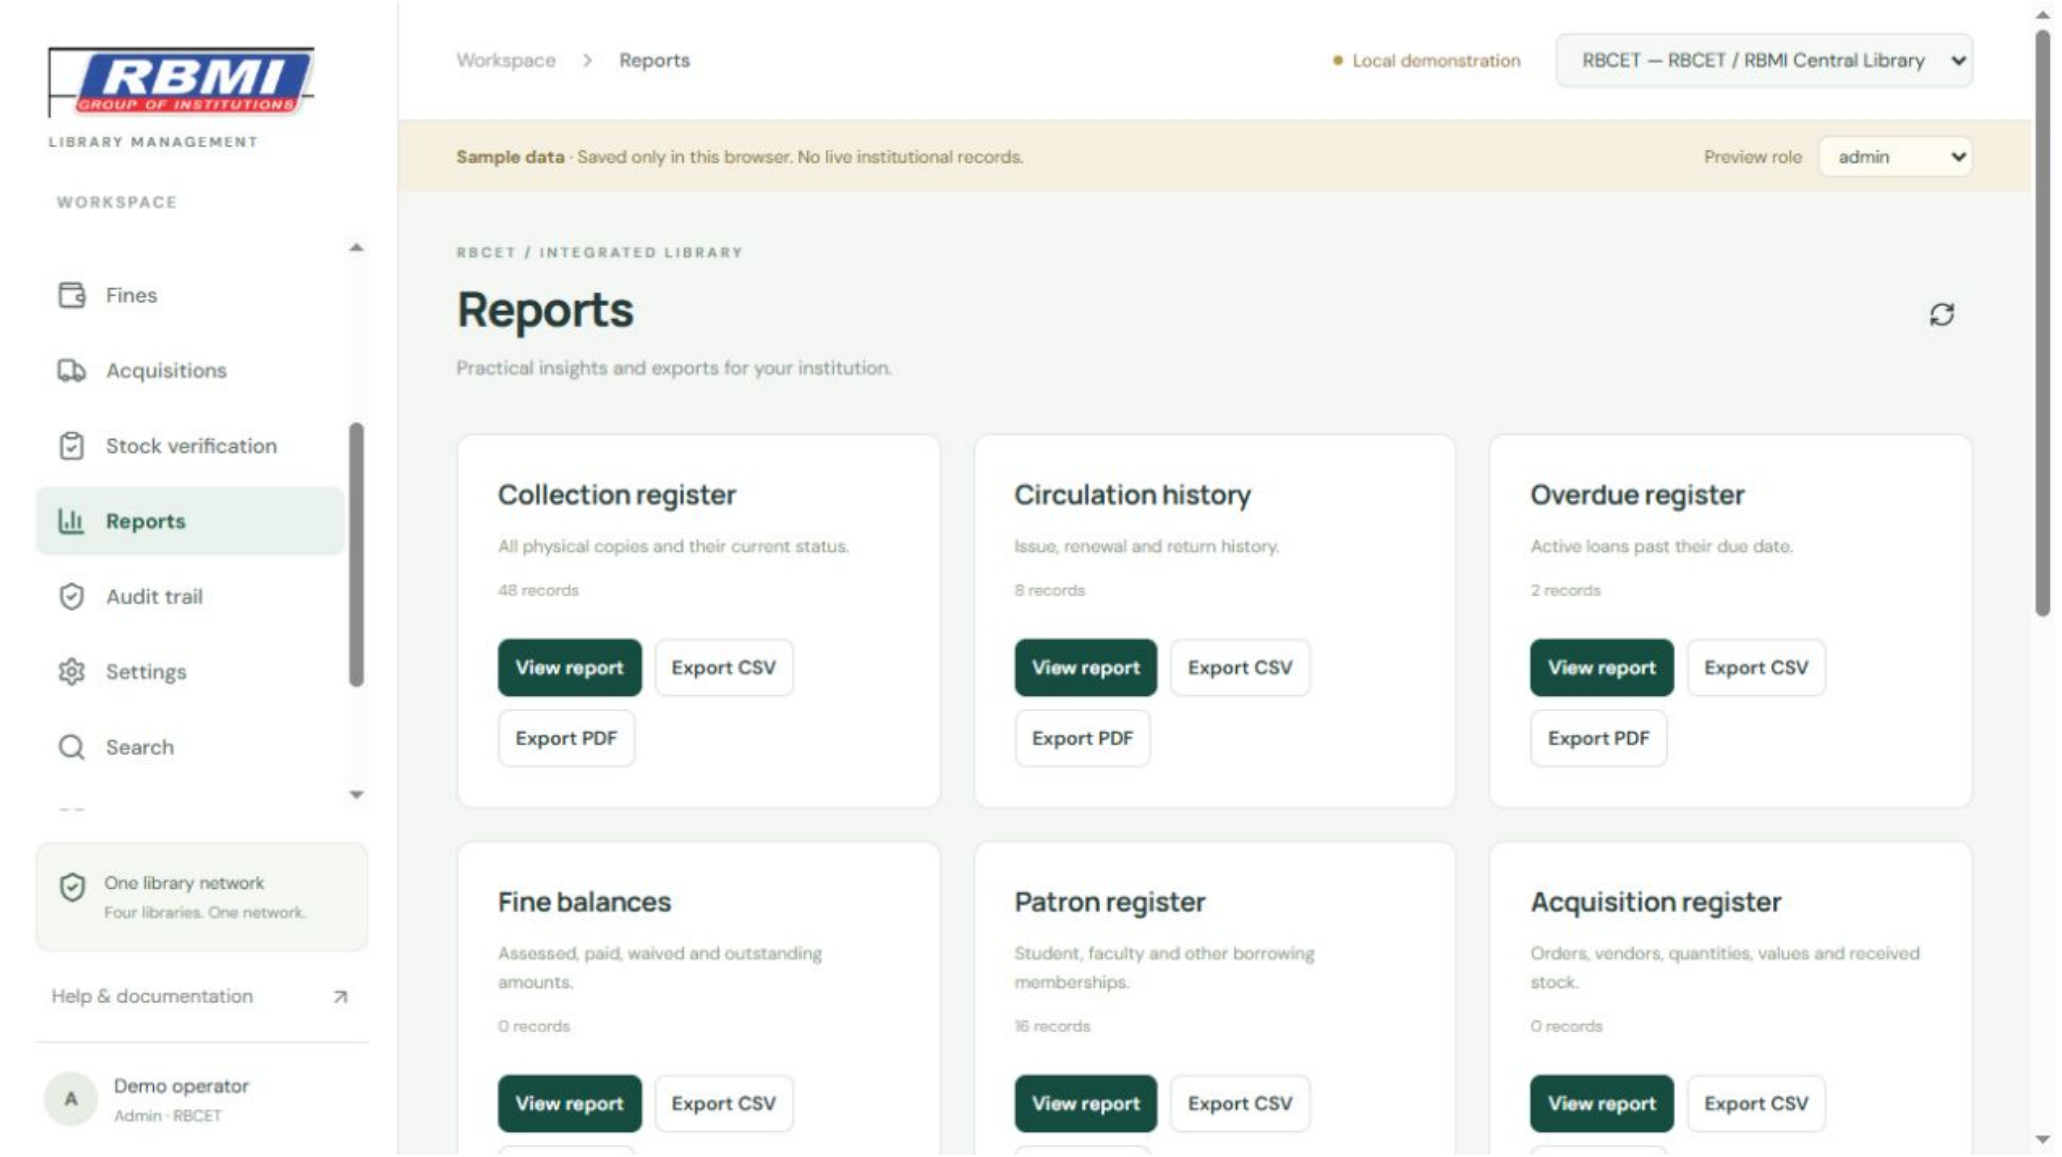


20.2 / Reports and saved definitions

The on-screen viewer shows the matching count, search, rows per page and export controls. Exports include every matching row, not just this page. (Sample workspace)

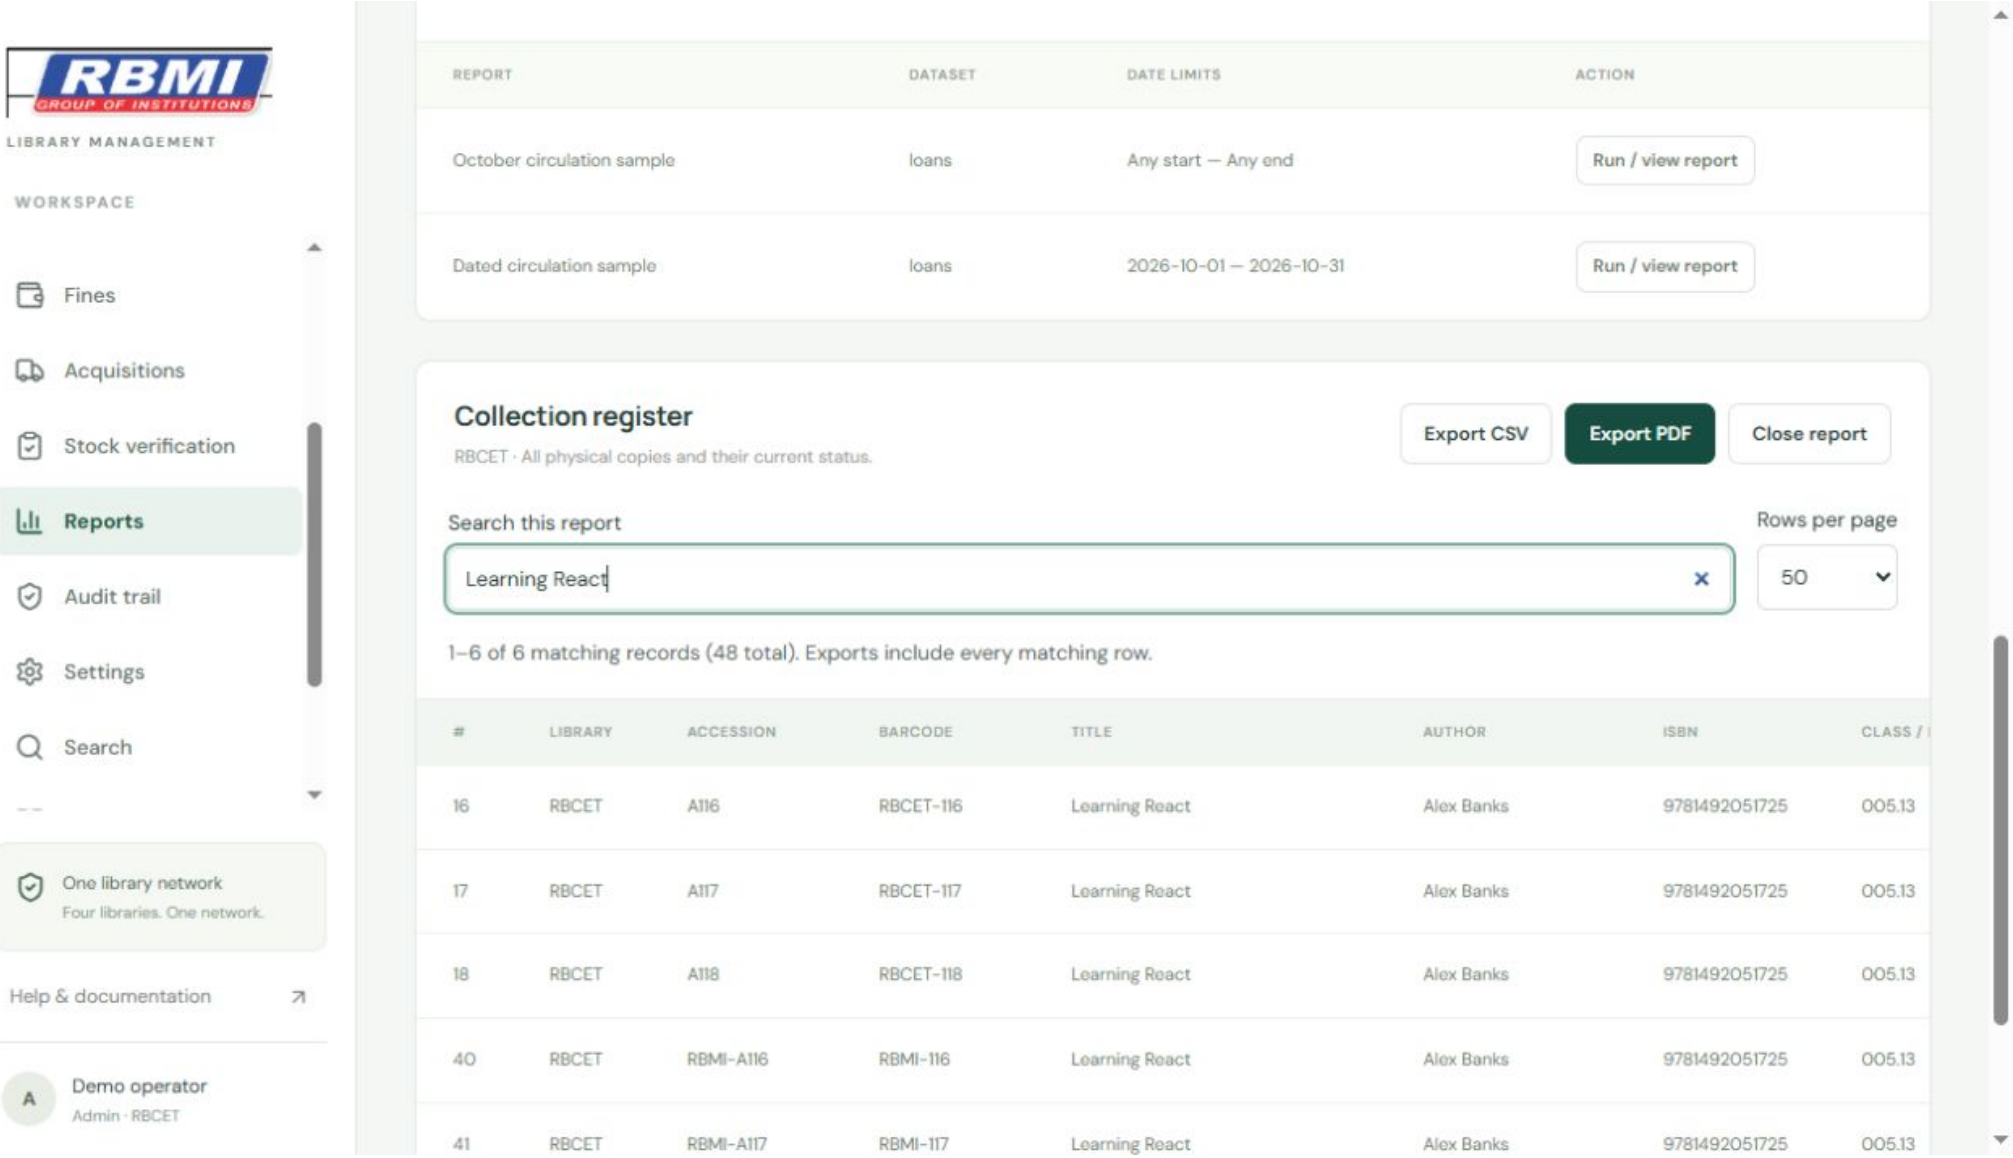

20.3 / Reports and saved definitions

A saved circulation report shows its date limits and results inside the same viewer. It can also be exported as PDF or CSV. (Sample workspace)

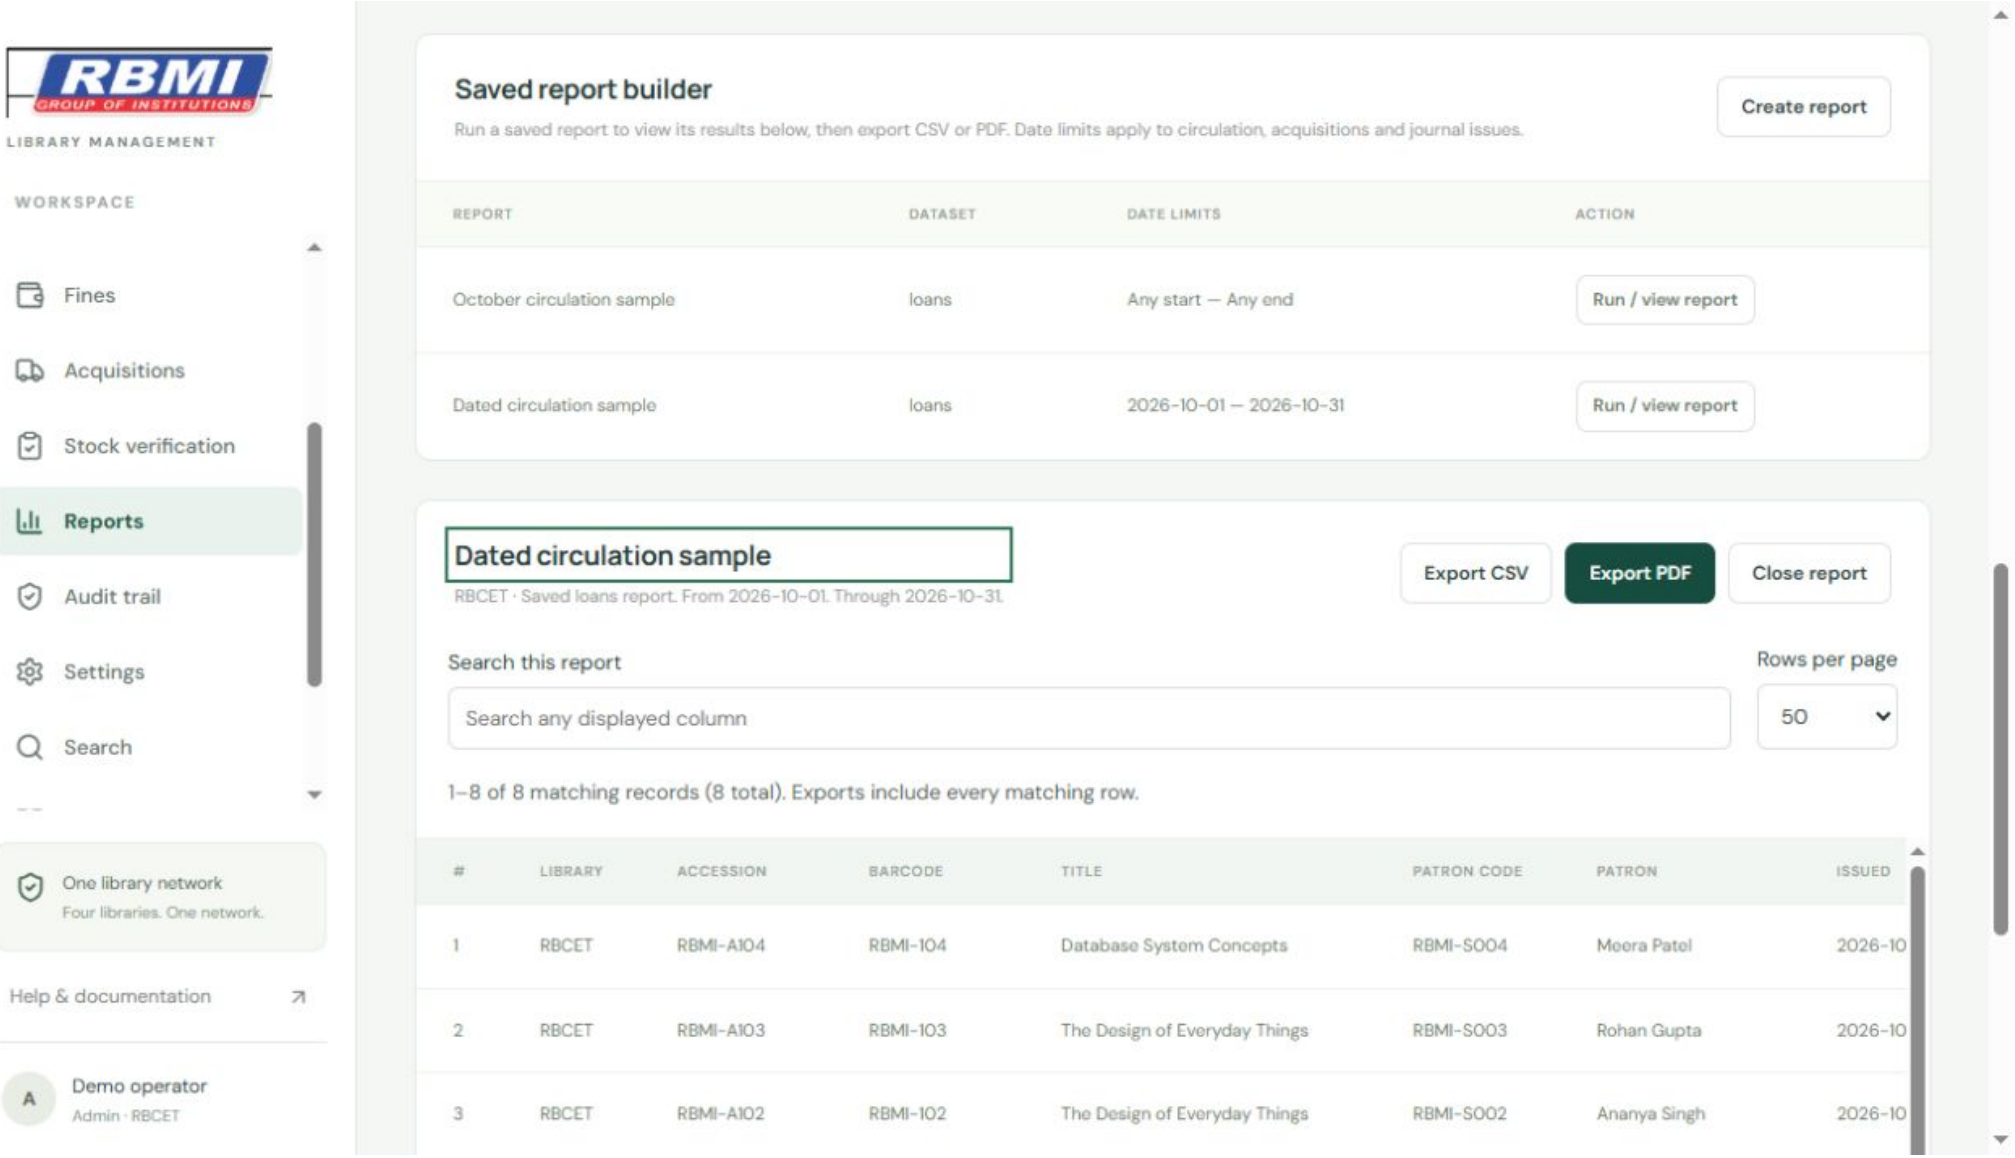

21 / Administration and audit trail

The network administrator manages the four libraries. Authorization is checked on each database/API request.

How to use this section

1. Select the correct library before changing policies, holidays or assignments in Settings.

2. Holiday calendar: download the CSV template in Settings. Fill date,name with one approved holiday per row, dates in YYYY-MM-DD format, then save as CSV UTF-8. Upload up to 1,000 dates, review the preview and select Approve and import. Existing dates update names; omitted dates are retained. Each library has its own calendar.

3. For an unplanned closure, select Add additional holiday, enter the date and holiday name, and save. Only the administrator can upload or add holidays. Invalid dates or duplicate dates reject the entire upload.

4. Create staff using real email addresses and unique temporary passwords. Creating a librarian also assigns that library's primary librarian.

5. To replace a librarian, use Assign librarian with the existing Auth UUID and display name. The former primary librarian membership is removed from that library.

6. Assign assistant, accountant, auditor or linked patron memberships in Institution access. Another network admin cannot be created here.

7. Open Audit trail, search by action/actor/details, expand stored details and export authorized records.

8. Review availability changes, account operations, imports, returns and fine waivers in particular.

9. Audit and membership tables use Previous / Next database pages. Other growing workflow sections show Load next controls when more data exists. Their local search covers records loaded so far. Account lists load 100 Auth users at a time.

Notes and limits

The administrator email is fixed in the account UI. An administrator-identity change requires deliberate trusted database maintenance.


Audit records have no user-facing deletion. Passwords are not stored in audit details.

Uploaded and additional holidays are excluded from overdue fine days. They also move newly calculated due dates to the next open day. Already assessed fines are retained; use an authorized audited waiver where appropriate.

Large audit details are summarized in lists and CSV. Open View details > Load full audit details and use Previous / Next detail part to inspect the complete preserved payload.


21.1 / Administration and audit trail

Audit trail records the operator, action, time and non-secret details. Search or expand entries for an authorized review. (Sample workspace)

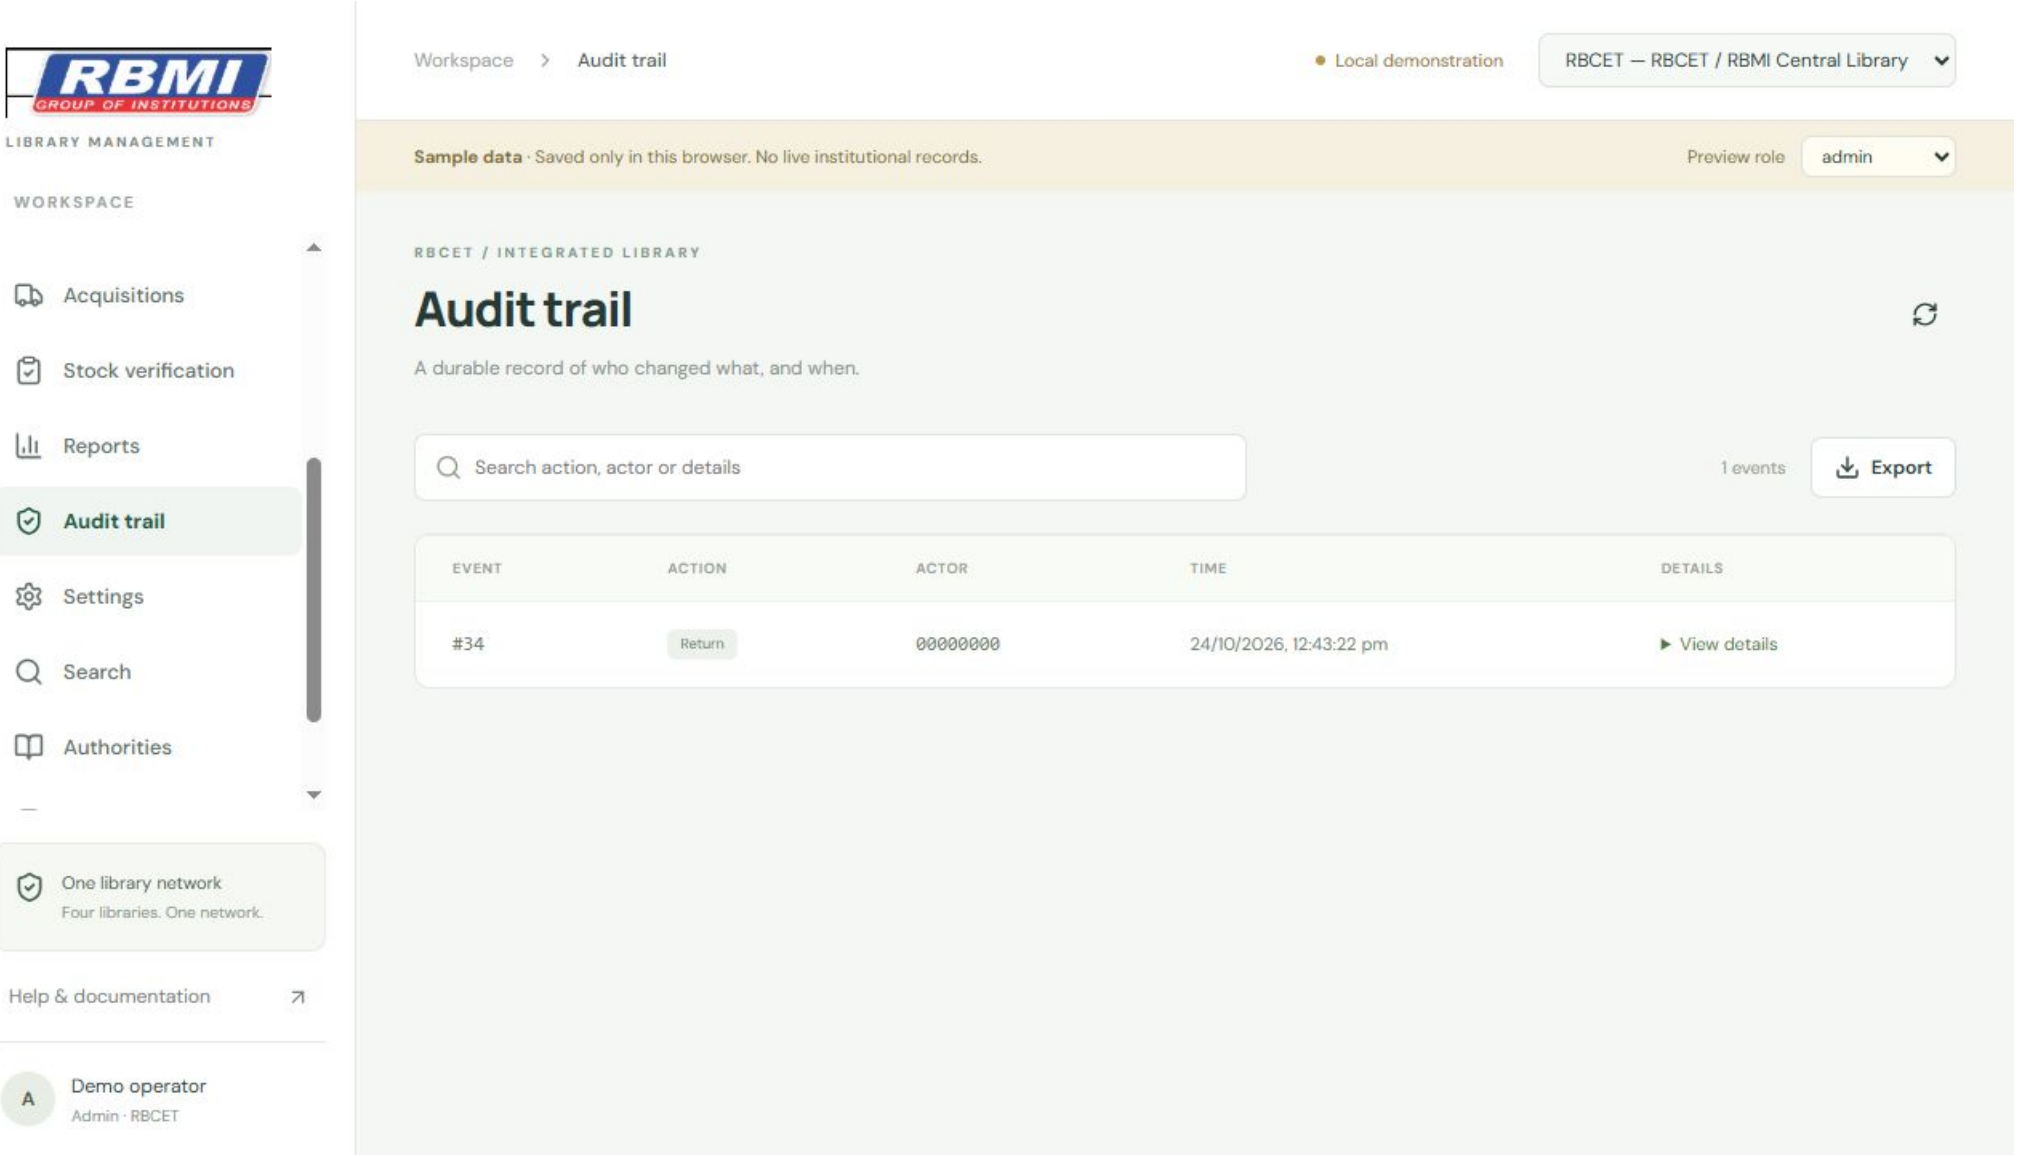


21.2 / Administration and audit trail


In Settings, download the holiday template and upload approved dates for the selected library. RBGN can have its own list. (Sample workspace)

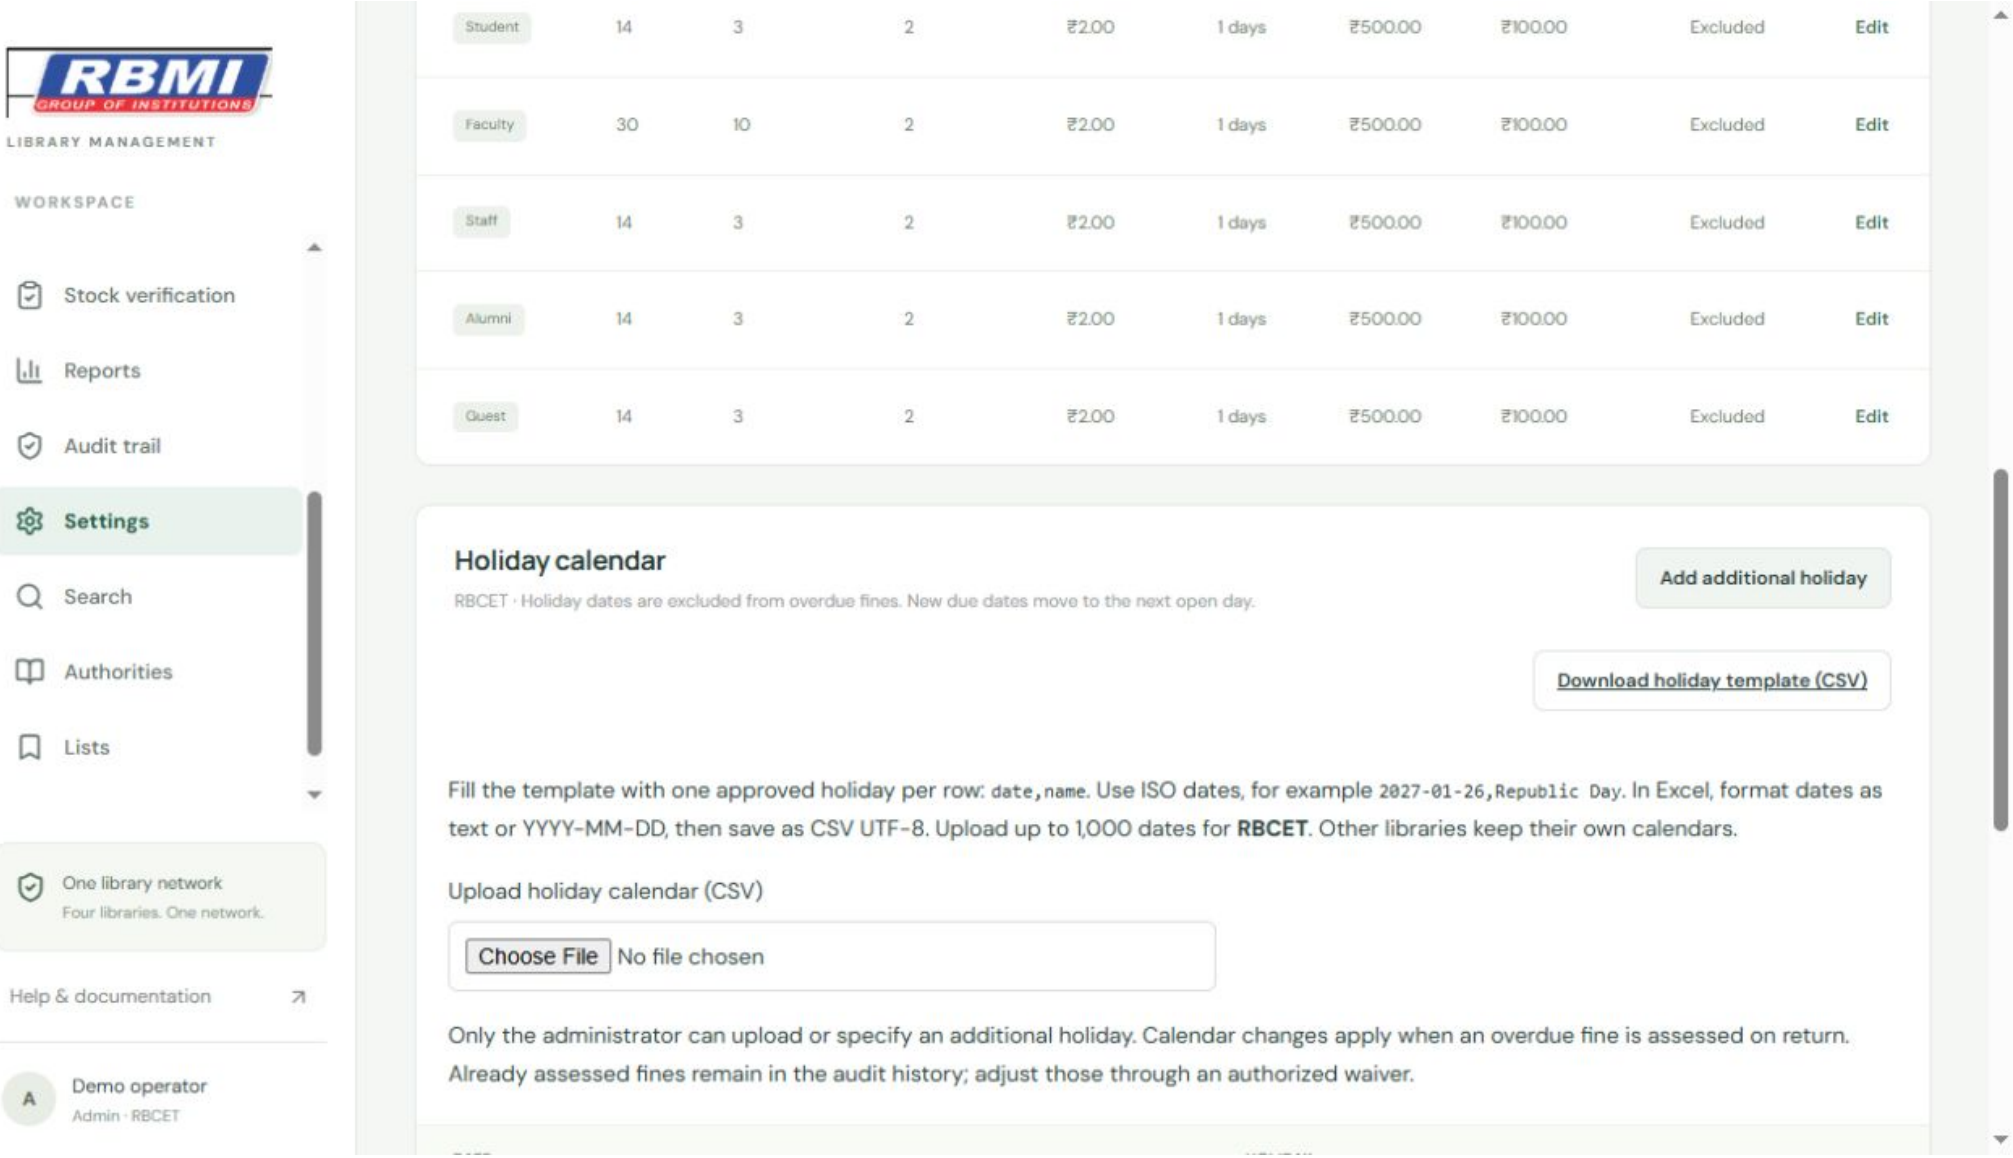

21.3 / Administration and audit trail

Add additional holiday records an unplanned closure. Only the administrator can save it; the date is excluded from fines. (Sample workspace)

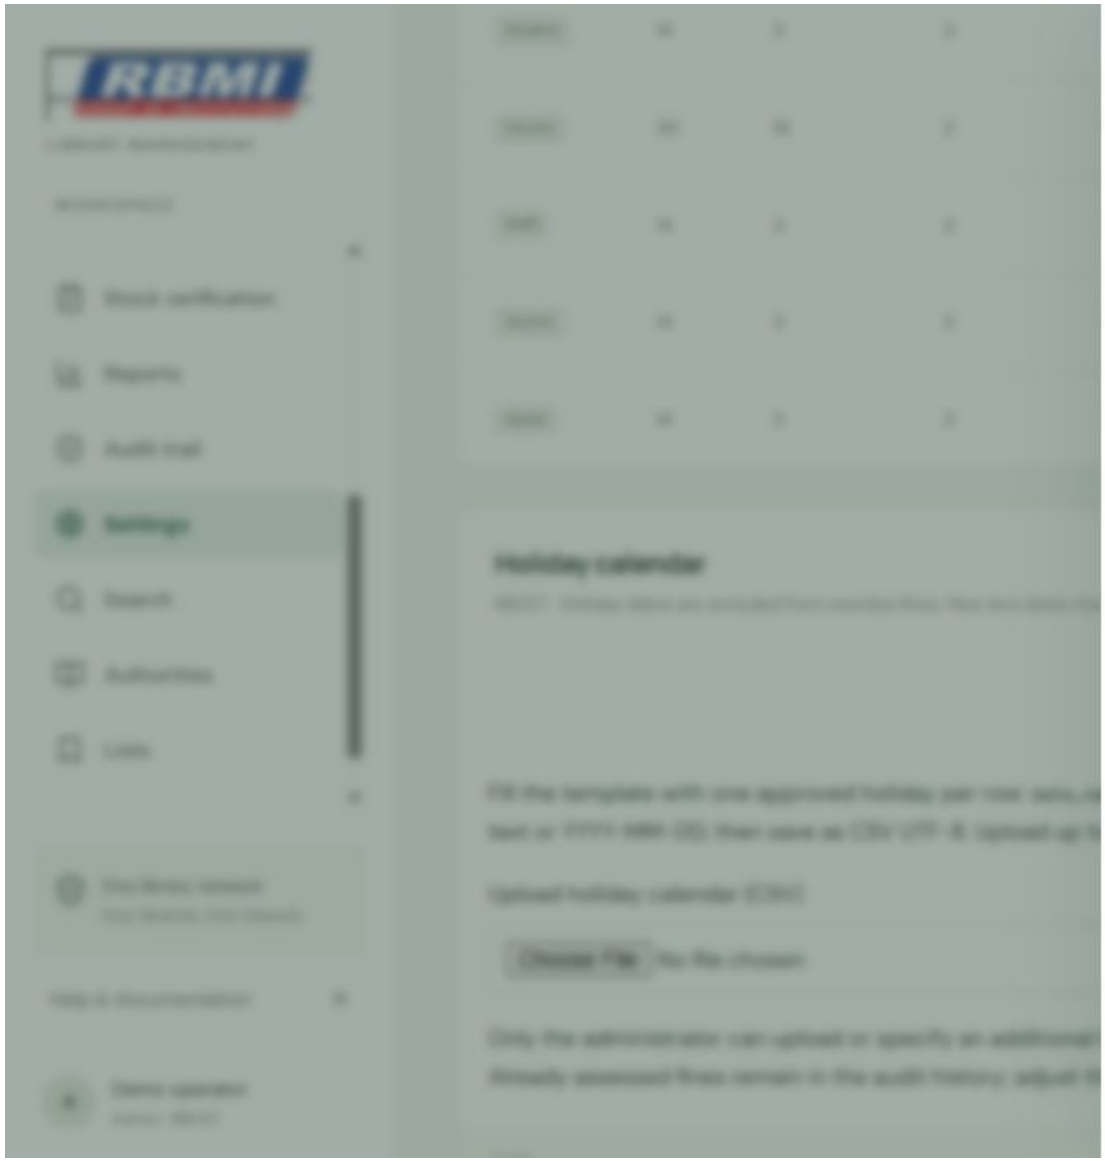

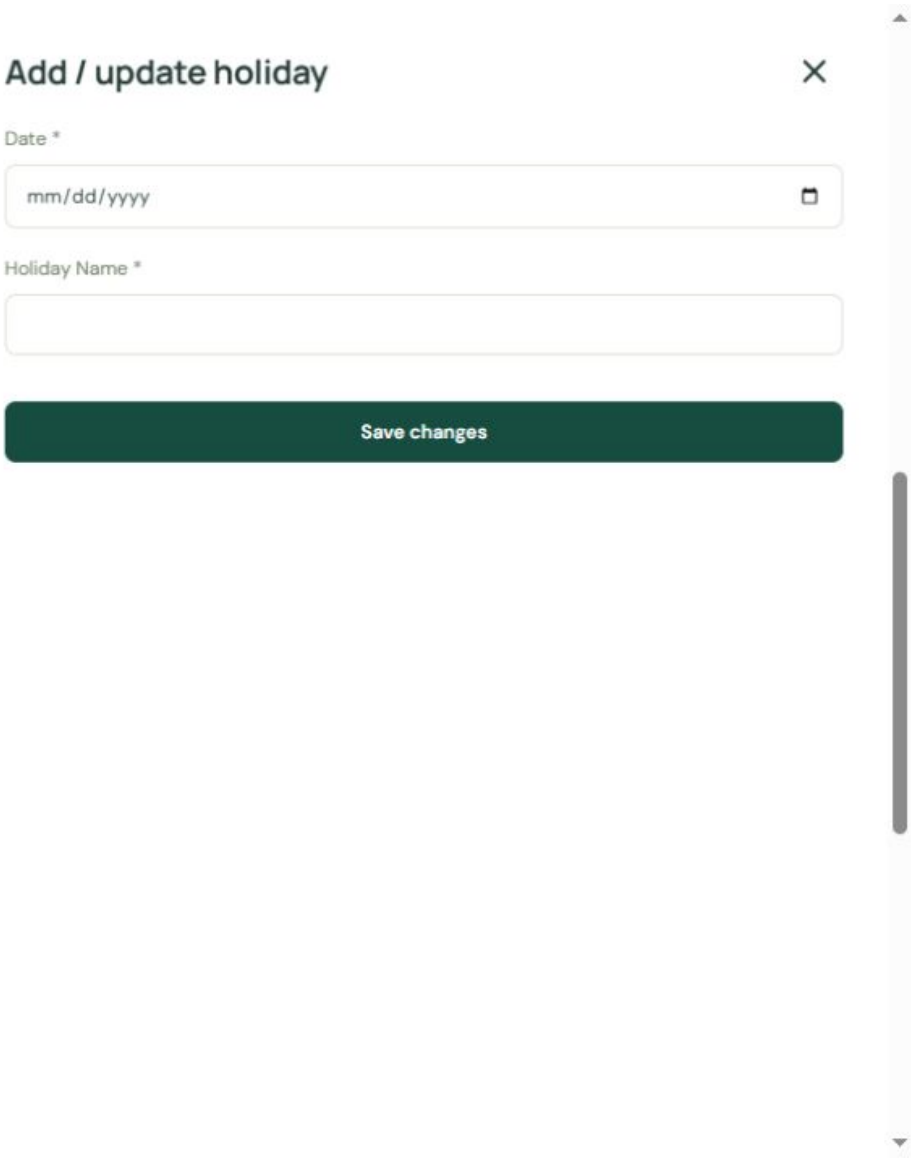

22 / Developer installation and deployment

The source repository is drrahulrastogi/rbmi-ilms. The UI and account endpoints run on Vercel; shared records and Auth run on Supabase.

How to use this section

1. Install Node.js 20.16 or newer, run npm ci, npm test and npm run build. npm run dev starts local development. Without both Supabase variables it uses fictional browser-local records.

2. For a NEW Supabase project run database/install-new-supabase.sql once, containing all thirteen migrations and the policy/institution seed. Never run the creation installer over an existing library.

3. Disable public signup, keep email/password login enabled, create rahul.r@rbmi.in in Auth and run scripts/bootstrap-admin.sql with its UUID.

4. Set VITE_SUPABASE_URL and VITE_SUPABASE_ANON_KEY to the public URL/key. Set SUPABASE_SERVICE_ROLE_KEY only as a sensitive server-side Vercel variable; never prefix it with VITE_.

5. Set Auth Site URL to the HTTPS application; allow /?recovery=1 and /?setup=invite. Configure invite/recovery SMTP and require strong passwords. New invitations use the provider's one-use email link and a 24-hour application setup deadline; provider link expiry may be shorter.

6. Deploy the repository root to the intended Vercel Vite project. vercel.json runs tests before the build. The current release uses authenticated CLI deployment; GitHub source hosting alone does not imply automatic Vercel deployment.

7. For an existing installation, back up first and apply only missing migrations in order. Never recreate the original schema over live data.

Notes and limits


PostgreSQL provides transactional circulation and unique identifiers. Supabase supplies managed database/Auth and Vercel serves the UI and server endpoints.

Free plans have quotas and provider-controlled pause/retention rules. Check dashboards before scaling. No paid upgrade is enabled by this release.

Vercel adds Content-Security-Policy and Permissions-Policy headers. Account endpoints use shared per-IP and per-user quotas, return 429 with Retry-After, and emit redacted structured logs. The GitHub health workflow checks /api/health and the public page every 15 minutes after publication. Configure repository workflow-failure notifications for alerts.

22.1 / Developer installation and deployment

After deployment, verify the library selector and connection indicator. This screenshot is a sample workspace; live mode shows Supabase connected. (Sample workspace)

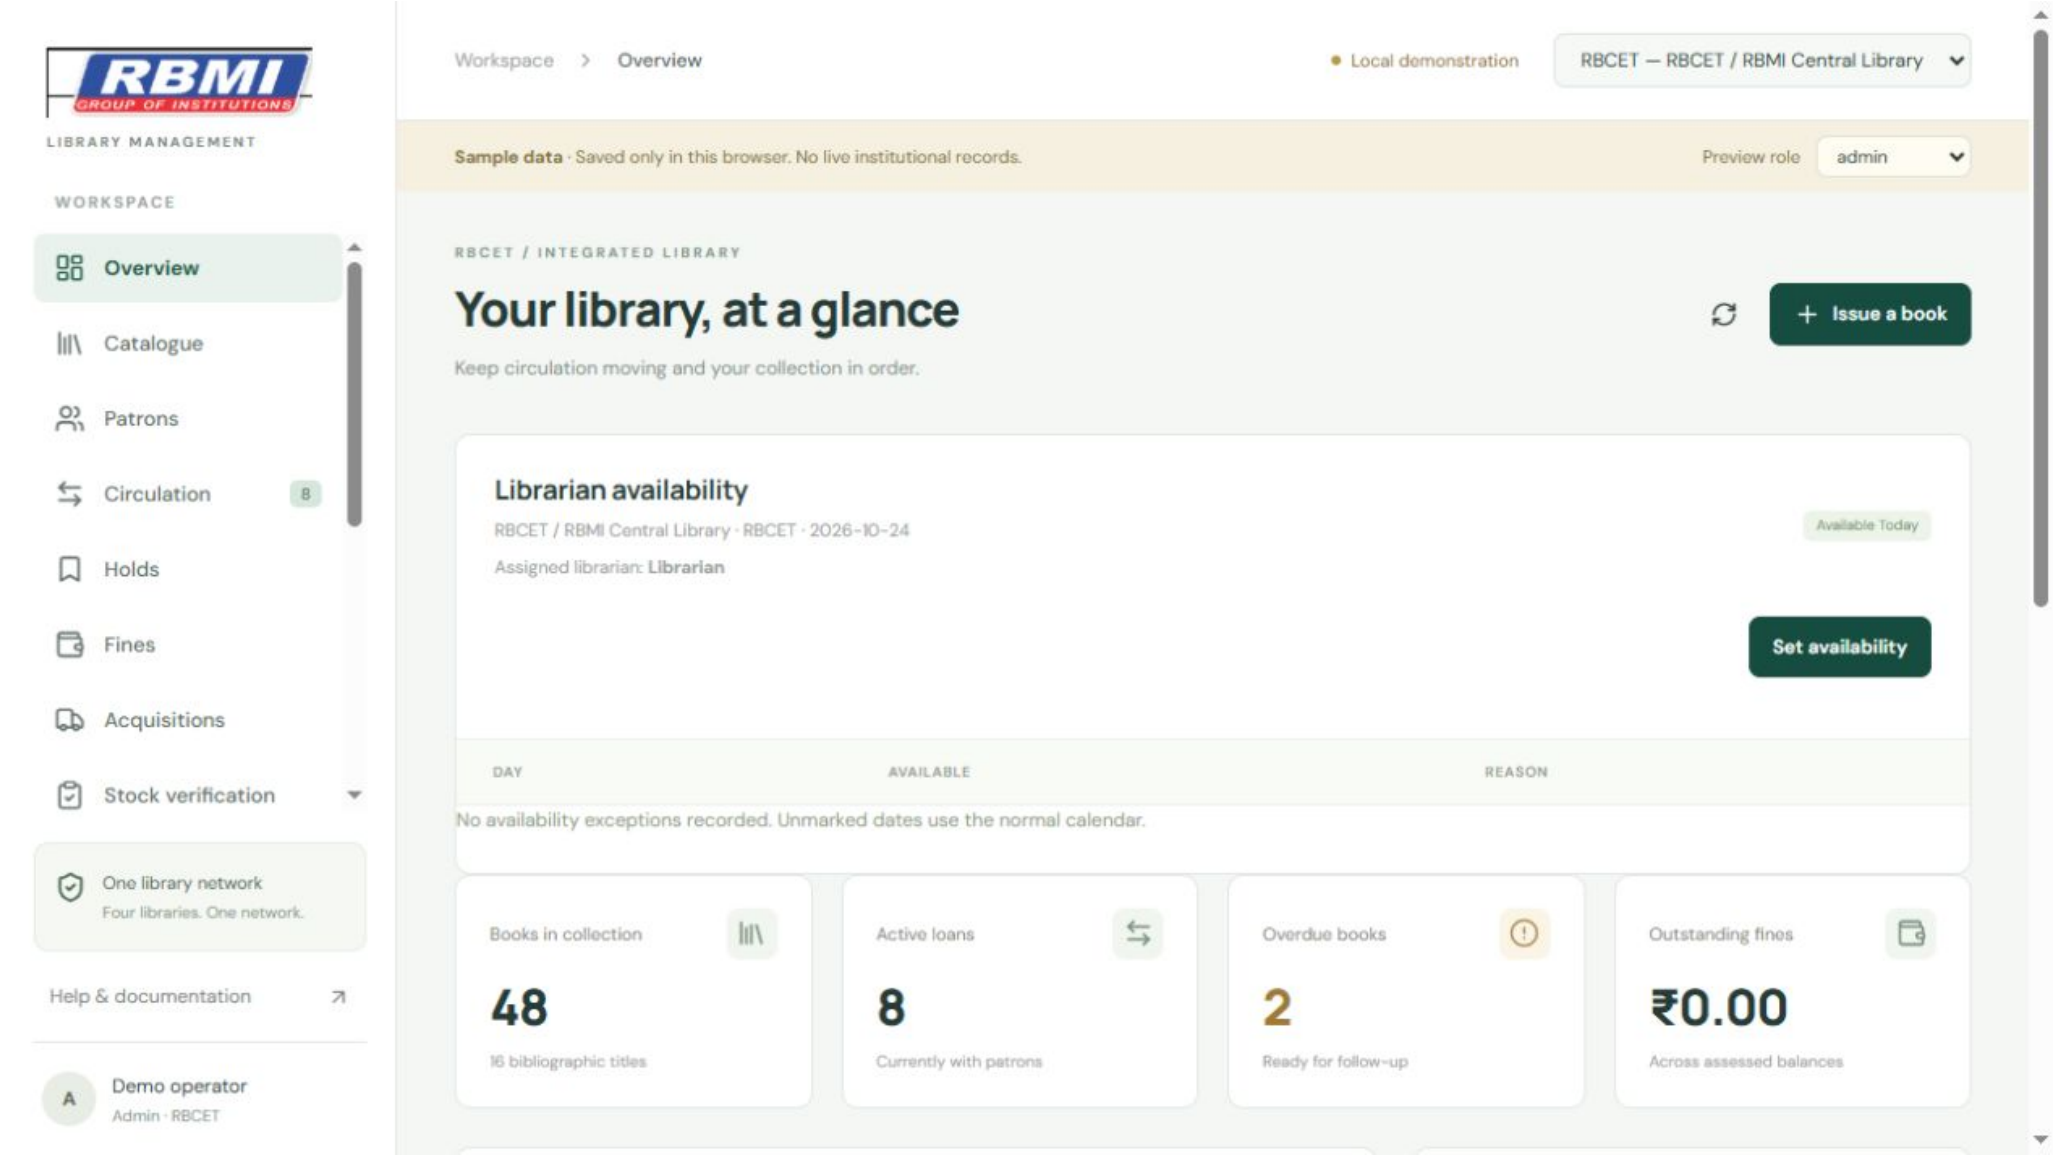

23 / Backup, restore and private handover

The public source package includes schema and fictional seeds, not live students, staff passwords or original private workbooks.

How to use this section

1. Use an authorized database dump or trusted SQL export for all app tables, source archives and audit records. Store backups in a protected off-site location.

2. Inventory the Supabase/Vercel projects, environment variable names and SMTP setup. Keep secret values in an approved password manager.

3. Plan Supabase Auth identity backup/migration separately through supported tools. A patron CSV is not an Auth backup.

4. Before upgrades/imports take a verified backup and retain original Excel files and reconciliation reports.

5. Restore into a separate project and verify counts, memberships, loans, fines and recovery settings before trusting a restore procedure.

6. Treat initial-password CSVs as private handover files that become outdated after password changes; use recovery instead of assuming old passwords remain valid.


Notes and limits

A synthetic local PostgreSQL restore drill compared hashes for all 35 app/Auth-stub tables, restored sequences and verified a post-restore write. This does not certify production disaster recovery, hosted Supabase Auth, Storage or point-in-time recovery. Take protected production backups and verify a separate hosted restore before relying on them.

Clearing browser storage removes local demonstration records, not live Supabase data.

23.1 / Backup, restore and private handover

Register exports support authorized record review. Follow the backup chapter for database backups; CSV exports are not a complete database backup. (Sample workspace)

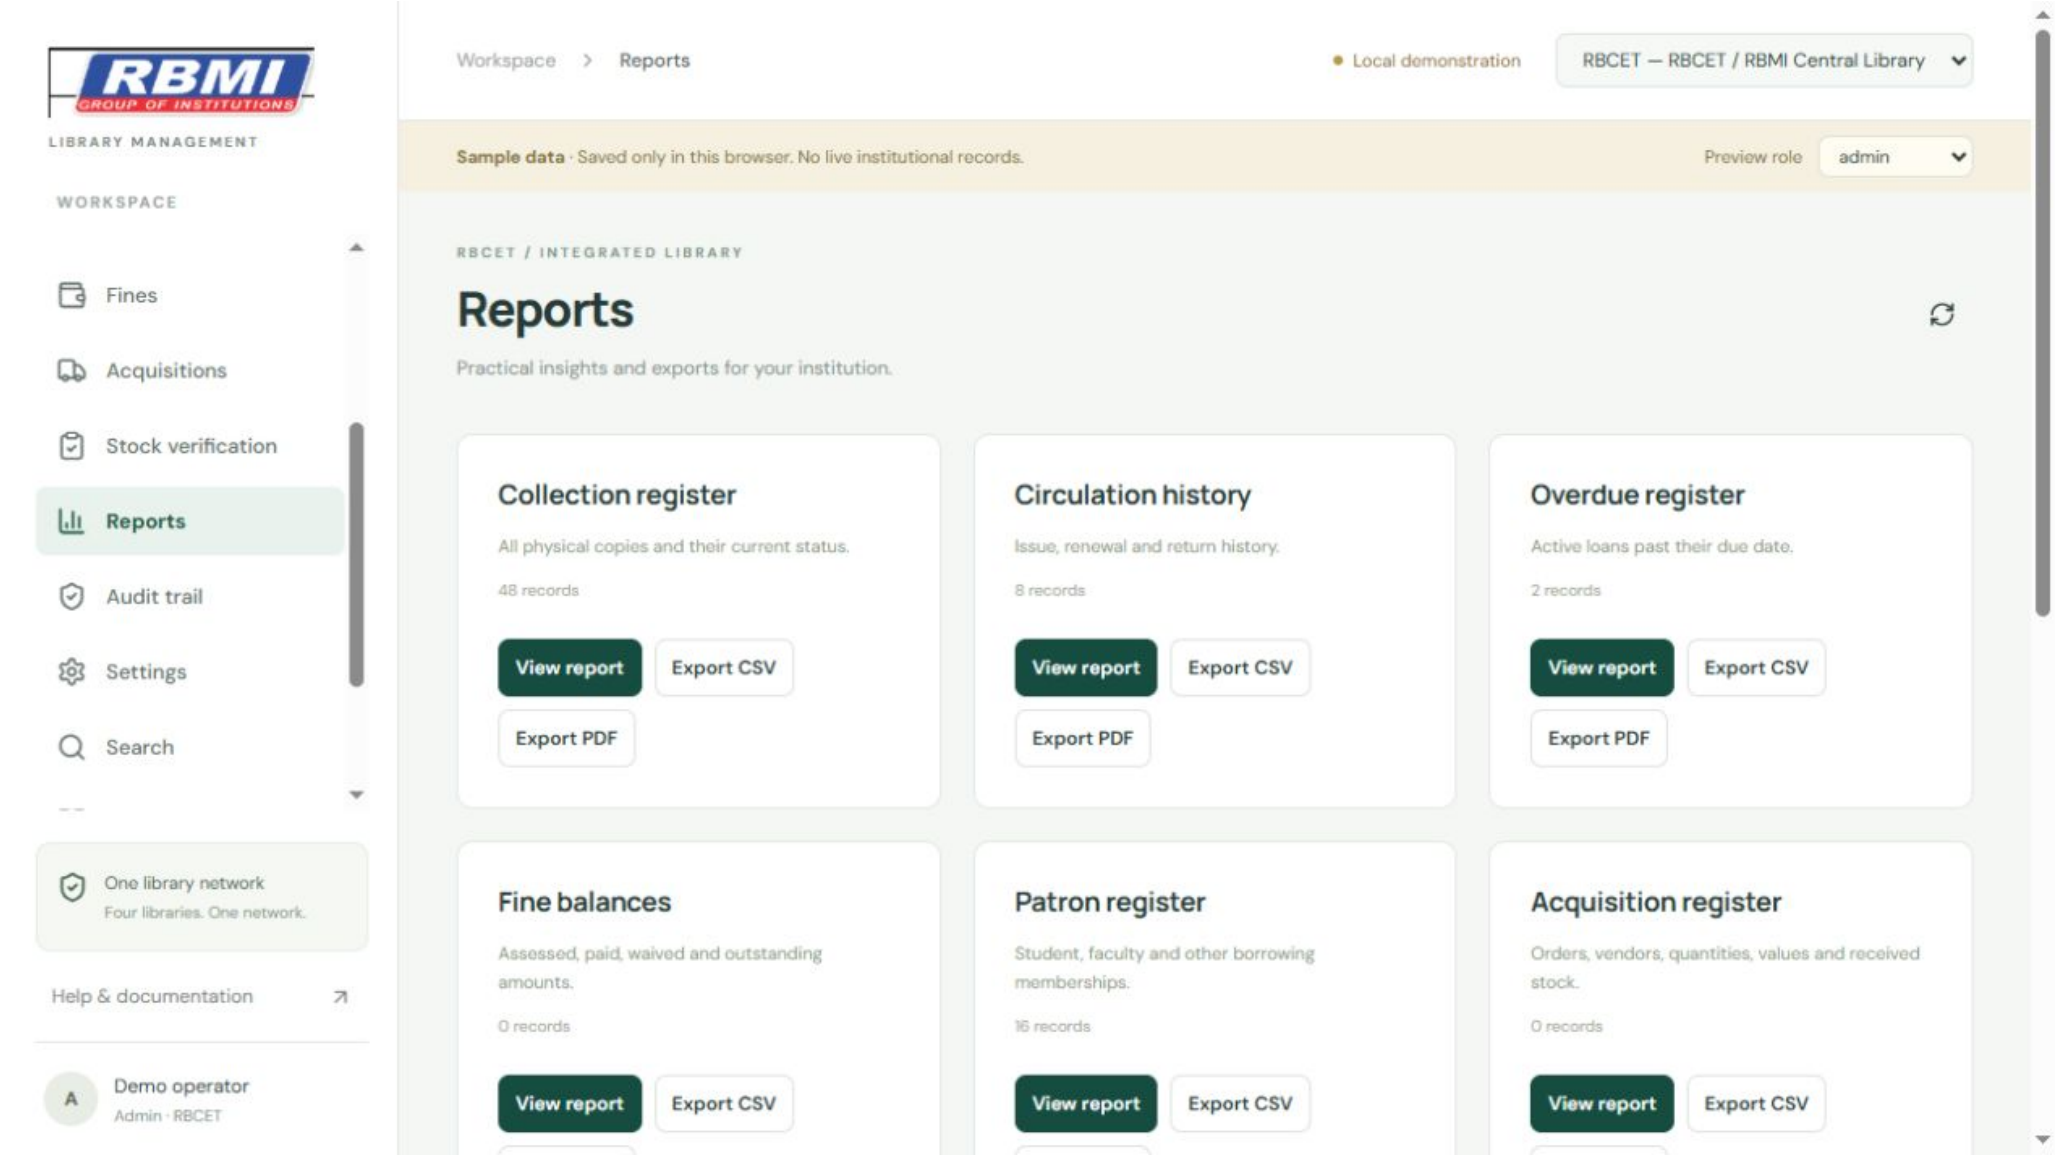

24 / Troubleshooting and Koha coverage limits

The supplied Koha documentation informed the acquisition, advanced/item search, authority, migration, circulation, lists, OPAC, patron, report and serial workflows. This application implements the targeted workflows, not complete Koha compatibility.

How to use this section

1. Wrong password: use the registered React-library email and email recovery. A NetBeans/Derby account or patron number is a different identity.

2. No membership: ask admin to assign the correct library/role. A replaced librarian may retain an Auth identity without access to the old library.

3. Issue rejected: check library code, copy status, active membership, expiry, loan limits, overdue loans, balance threshold and hold priority.

4. Fine seems wrong: inspect saved policy, eligible dates, holidays, availability, grace and cap. Already-posted charges require an authorized waiver when correcting past dates.

5. No email: inspect spam, use the latest request, verify the address, SMTP limits and Auth redirect settings. The owner confirmed administrator recovery-email delivery during setup.

6. Import fails: inspect required columns, duplicates and invalid numbers. A failing batch rolls back.

7. Slow catalogue: narrow the search and use Show more. Holdings load through secure server pages. Very large audit histories may require additional pagination.

8. Too many requests (429): wait for the Retry-After period, then retry. MFA prompt: enter the current authenticator code. Invitation expired: ask the librarian/admin to resend setup email; discard older links.

Notes and limits

Outside scope: offline circulation, RFID/SIP2, EDI, SSO, federated discovery, complex serial schedules, automated claims/hold emails, purchase suggestions, reviews/tags, partial receipts and full MARC editing/export.

Same-library returns intentionally prevent inter-library returns. Report errors without sharing passwords, private keys or student exports.

24.1 / Troubleshooting and Koha coverage limits

For import errors, check the template headers, TRUE/FALSE, ISO expiry dates and institute assignment before retrying. (Sample workspace)

