Quick start for LaTeXing with IEEEtran.cls for IEEE Computer Society Conferences

First Author, Second Author University of Examples, Germany {lastname}@example.org Third Author
School of Electrical and
Computer Examples
Georgia Institute of Examples
Atlanta, Georgia 30332–0250
http://www.example.org

Abstract—Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

I. INTRODUCTION

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulput phetus eu enim. Vestibulum pellentesque felis eu massa.

The remainder of the paper starts with a presentation of related work (Section II). It is followed by a presentation of hints on LATEX (Section III). Finally, a conclusion is drawn and outlook on future work is made (Section IV).

II. RELATED WORK

Winery [1] is a graphical modeling tool. The whole idea of TOSCA is explained by Binz et al. [2].

III. LATEX HINTS

This section contains hints on writing LaTeX. It focuses on minimal examples, which can be directly adapted to the content

A. Handling of paragraphs

One sentence per line. This rule is important for the usage of version control systems. A new line is generated with a blank line. As you would do in Word: New paragraphs are generated by pressing enter. In LaTeX, this does not lead to a new paragraph as LaTeX joins subsequent lines. In case you want a new paragraph, just press enter twice (!). This leads to an empty line. In word, there is the functionality to press shift and enter. This leads to a hard line break. The text starts at the beginning of a new line. In LaTeX, you can do that by using two backslashes (\\).

This is rarely used.

Please do *not* use two backslashes for new paragraphs. For instance, this sentence belongs to the same paragraph, whereas the last one started a new one. A long motivation for that is provided at http://loopspace.mathforge.org/HowDidIDoThat/TeX/VCS/#section.3.

```
Corresponding
                                              code
                                                              of
 paper-conference-minted.tex
   One sentence per line.
   This rule is important for the usage of version control
    390 A new line is generated with a blank line
391 As you would do in Word:
392 New paragraphs are generated by pressing enter.
393 In LaTeX, this does not lead to a new paragraph as LaTeX joins
    \hookrightarrow subsequent lines.
394 In case you want a new paragraph, just press enter twice (!).
395
   This leads to an empty line.
396 In word, there is the functionality to press shift and enter.
397 This leads to a hard line break.
    The text starts at the beginning of a new line.
   In LaTeX, you can do that by using two backslashes
    400 This is rarely used.
401
   Please do \textit{not} use two backslashes for new paragraphs.
402
   For instance, this sentence belongs to the same paragraph,
     → whereas the last one started a new one.
404 A long motivation for that is provided at \url{http://
    \ \hookrightarrow \ \ loopspace.mathforge.org/HowDidIDoThat/TeX/VCS/\#section.3\}.
```

B. Notes separated from the text

The package mindflow enables writing down notes and annotations in a way so that they are separated from the main text.

This is a small note.

Corresponding LATEX code of paper-conference-minted.tex

412 \begin{mindflow}
413 This is a small note.
414 \end{mindflow}

C. Hyphenation

LATEX automatically hyphenates words. When using microtype, there should be less hypnetations than in other settings. It might be necessary to tweak the hyphenations nevertheless. Here are some hints:

In case you write "application-specific", then the word will only be hyphenated at the dash. You can also write applica\allowbreak{}tion-specific (result: application-specific), but this is much more effort.

You can now write words containing hyphens which are hyphenated at other places in the word. For instance, application"=specific gets application"=specific. This is enabled by an additional configuration of the babel package.

Corresponding ΔT_{FX} code of paper-conference-minted.tex In case you write \enquote{application-specific}, then the \hookrightarrow word will only be hyphenated at the dash. 426 You can also write \verb1applica\allowbreak{}tion-specific1 \hookrightarrow (result: applica\allowbreak{}tion-specific), but this is \hookrightarrow much more effort. 427 428 You can now write words containing hyphens which are \hookrightarrow hyphenated at other places in the word. For instance, \verb1application"=specific1 gets 430 This is enabled by an additional configuration of the babel → package.

D. Typesetting Units

Numbers can written plain text (such as 100), by using the siunitx package like that: $100 \frac{\mathrm{km}}{\mathrm{h}}$, or by using plain LATEX (and math mode): $100 \frac{\mathrm{km}}{\mathrm{h}}$.

```
Corresponding LATEX code of paper-conference-minted.tex

436 Numbers can written plain text (such as 100), by using the

→ siunitx package like that:

437 \SI{100}{\km\per\hour},

438 or by using plain \LaTeX{} (and math mode):

439 $100 \frac{\mathit{km}}{h}$.
```

5% of $10 \,\mathrm{kg}$

```
Corresponding LATEX code of paper-conference-minted.tex

443 \SI{5}{\percent} of \SI{10}{kg}
```

Numbers are automatically grouped: 123 456.

```
Corresponding LATEX code of paper-conference-minted.tex

447 Numbers are automatically grouped: \num{123456}.
```

E. Surrounding Text by Quotes

Please use the "enquote command" to quote something. Quoting with "quote" or "quote" also works.

```
Corresponding LATEX code of paper-conference-minted.tex

453 Please use the \enquote{enquote command} to quote something.
454 Quoting with "`quote"' or ``quote'' also works.
455
```

F. Cleveref examples

Cleveref demonstration: Cref at beginning of sentence, cref in all other cases.

Figure 1 shows a simple fact, although Figure 1 could also show something else.

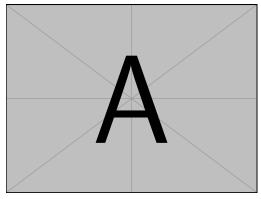


Figure 1: Example figure for cref demo

Heading1	Heading2
One Thee	Two Four
Thee	Four

Figure 2: Example table for cref demo

Figure 2 shows a simple fact, although Figure 2 could also show something else.

Section III-F shows a simple fact, although Section III-F could also show something else.

```
Corresponding LATEX code of paper-conference-minted.tex

485 \Cref{fig:ex:cref} shows a simple fact, although

→ \cref{fig:ex:cref} could also show something else.

486

487 \Cref{tab:ex:cref} shows a simple fact, although

→ \cref{tab:ex:cref} could also show something else.

488

489 \Cref{sec:ex:cref} shows a simple fact, although

→ \cref{sec:ex:cref} could also show something else.
```

G. Figures

Figure 3 shows something interesting.

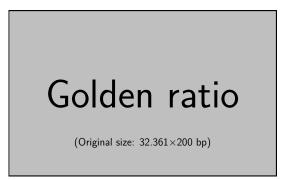


Figure 3: Simple Figure. Based on Scharrer [3].

```
Corresponding
                              LATEX
                                               code
                                                               of
paper-conference-minted.tex
495
    \Cref{fig:label} shows something interesting.
496
497
    \begin{figure}
       \includegraphics[width=.8\linewidth]{example-image-golden}
499
500
      \caption[Simple Figure]{Simple Figure. Based on

    \citet{mwe}.}

      \label{fig:label}
    \end{figure}
```

One can span a figure across multiple columns by using \begin{figure*}. See Figure 4 as an example.

```
Corresponding
                               LATEX
                                                 code
                                                                 of
 paper-conference-minted.tex
    \begin{figure*}
511
       \centering
512
      % note that \textwidth is used instead of \linewidth
513
      \% This ensures that the graphics width is 60% of the "page"
      \hookrightarrow (text block), and not just 60% of the current text
      % See https://tex.stackexchange.com/a/17085/9075 for details
514
515
      \includegraphics[width=.6\textwidth]{example-image-16x9}
516
       \caption{16x9 Figure}
517
       \label{fig:16x9}
518 \end{figure*}
```

H. Sub Figures

An example of two sub figures is shown in Figure 5.

```
Corresponding
                                 LATEX
                                                   code
                                                                    of
 paper-conference-minted.tex
527
     \begin{figure*}[!b]
528
         \centering
         \subfloat[Case I]{\includegraphics[width=.4\linewidth]{ |
529

    ⇔ example-image-a}%

530
         \label{fig:first_case}}
531
       \hfil
         \subfloat[Case II]{\includegraphics[width=.4\linewidth]{ |
532
         \hookrightarrow \quad \text{example-image-b} \%
         \label{fig:second_case}}
       \caption{Example figure with two sub figures.}
534
       \label{fig:two_sub_figures}
535
     \end{figure*}
```

Note that often IEEE papers with subfigures do not employ subfigure captions (using the optional argument to \subfloat[]), but instead will reference/describe all of them (a), (b), etc., within the main caption. Be aware that for subfig.sty to generate the (a), (b), etc., subfigure labels, the optional argument to \subfloat must be present. If a subcaption is not desired, just leave its contents blank, e.g., \subfloat[]. An example is shown in Figure 6.


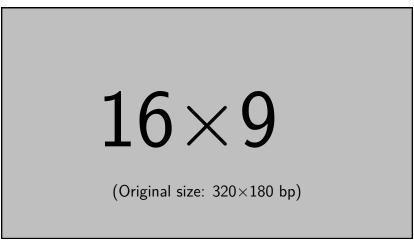


Figure 4: 16x9 Figure

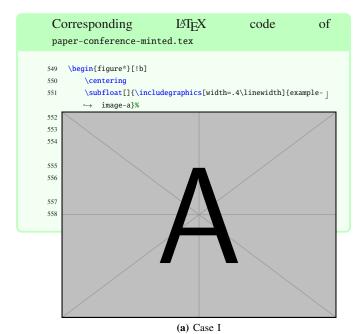

I. Tables

Note that IEEE does not support $\beta,$ one has to use $\beta.$

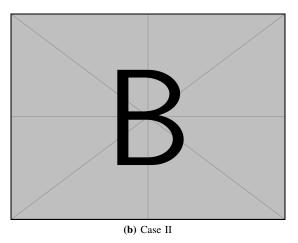
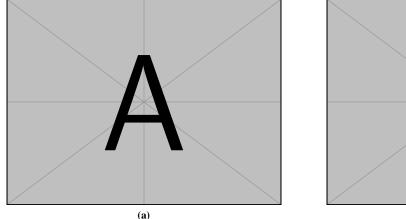


Figure 5: Example figure with two sub figures.



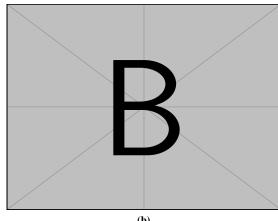


Figure 6: Example figure with two sub figures. IEEE style. (a) The first case. (b) The second case.

Figure 7: Simple Table

Heading1	Heading2
One	Two
Thee	Four

Figure 8: Table with diagonal line

Diag Column Head II Diag Column Head I	Second	Third
	foo	bar

```
Corresponding
                             LATEX
                                              code
                                                              of
 paper-conference-minted.tex
    \begin{figure}
566
      \caption{Simple Table}
567
568
      \label{tab:simple}
      \centering
570
      \begin{tabular}{11}
571
        \toprule
        Heading1 & Heading2 \\
572
573
        \midrule
574
        One & Two
575
        Thee
                & Four
                            11
576
        \bottomrule
      \end{tabular}
577
578 \end{figure}
```

```
Corresponding
                             LATEX
                                               code
                                                              of
 paper-conference-minted.tex
   % Source: https://tex.stackexchange.com/a/468994/9075
583 \begin{figure}
584 \caption{Table with diagonal line}
585 \label{tab:diag}
586 \begin{center}
587 \begin{tabular}{|l|c|c|}
588 \hline
589 \diagbox[width=10em]{Diag\\Column Head I}{Diag Column\\Head
    \hookrightarrow II} & Second & Third \\
590 \hline
591 & foo & bar \\
592 \hline
593 \end{tabular}
594
   \end{center}
   \end{figure}
```

J. Source Code

minted is a sophisticated package to enable properly highlighted listings. It uses the pygments library, which in turn requires Python.

Listing 1 shows source code written in XML. Zeile 2 contains a comment.

```
1 listing name="example">
2  <!-- comment -->
3  <content>not interesting</content>
4 </listing>
```

List. 1: Example XML listing using minted

```
Corresponding
                              LATEX
                                               code
                                                               of
 paper-conference-minted.tex
    \Cref{lst:XML} shows source code written in XML.
    \refline{line:comment} contains a comment.
607
608
    \begin{listing}[htbp]
        \begin{minted}[linenos=true,escapeinside=|\ |\ ] \{xml\} \\
609
610 sting name="example">
      <!-- comment --> |\labelline{line:comment}|
      <content>not interesting</content>
612
613 </listing>
614 \end{minted}
615
      \caption{Example XML listing using minted}
      \label{lst:XML}
617 \end{listing}
```

One can also typeset JSON as shown in Listing 2.

```
1 {
2     key: "value"
3 }
```

List. 2: Example JSON listing using minted

```
Corresponding
                                    LATEX
                                                        code
                                                                           of
 paper-conference-minted.tex
      \begin{listing}[htbp]
623
          \verb|\begin{|c|} \textbf{begin} \texttt{\{minted\}} \texttt{[linenos=true,escapeinside=||]} \texttt{\{json\}} \\
624
625
       key: "value"
626
627 }
628 \end{minted}
       \caption{Example JSON listing using minted}
629
630
       \label{lst:flJSON}
631 \end{listing}
```

Java is also possible as shown in Listing 3.

```
public class Hello {
public static void main (String[] args) {
System.out.println("Hello World!");
}
```

List. 3: Java code rendered using minted

```
Corresponding
                              LATEX
                                               code
                                                               of
 paper-conference-minted.tex
637
    \begin{listing}[htbp]
638
        \begin{minted}[linenos=true,escapeinside=||]{java}
639
    public class Hello {
        public static void main (String[] args) {
641
            System.out.println("Hello World!");
642
643 }
644
    \end{minted}
      \caption{Java code rendered using minted}
      \label{lst:flJava}
646
647 \end{listing}
```

K. Itemization

One can list items as follows:

- Item One
- Item Two

```
Corresponding LATEX code of paper-conference-minted.tex

655 \begin{\text{item Item One}}
656 \interrow Item Two
658 \end{\text{itemize}}
```

With the package paralist, one can create itemizations with lesser spacing:

- Item One
- Item Two

```
Corresponding LATEX code of paper-conference-minted.tex

664 \text{begin{compactitem}} 
665 \text{ \text{item Item One}} 
666 \text{ \text{ \text{item Item Two}}} 
667 \text{ \text{end{compactitem}}}
```

One can enumerate items as follows:

- 1) Item One
- 2) Item Two

With the package paralist, one can create enumerations with lesser spacing:

- 1) Item One
- 2) Item Two

```
Corresponding LATEX code of paper-conference-minted.tex

682 \begin{compactenum}
683 \item Item One
684 \item Item Two
685 \end{compactenum}
```

With paralist, one can even have all items typset after each other and have them clean in the tex document:

1) All these items... 2) ...appear in one line 3) This is enabled by the paralist package.

```
Corresponding LATEX code of paper-conference-minted.tex

691 \begin{inparaenum} 692 \item All these items...
693 \item ...appear in one line
694 \item This is enabled by the paralist package.
695 \end{inparaenum}
```

L. Other Features

The words "workflow" and "dwarflike" can be copied from the PDF and pasted to a text file.

```
Corresponding LATEX code of paper-conference-minted.tex

701 The words \enquote{workflow} and \enquote{dwarflike} can be

→ copied from the PDF and pasted to a text file.
```

The symbol for powerset is now correct: \mathscr{P} and not a Weierstrass p (\wp) .

 $\mathcal{P}(1,2,3)$

```
Corresponding LATEX code of paper-conference-minted.tex

705 The symbol for powerset is now correct: $\powerset$ and not a

→ Weierstrass p ($\wp$).

706

707 $\powerset({1,2,3})$
```

Brackets work as designed: <test> One can also input backquotes in verbatim text: `test`.

```
Corresponding LATEX code of paper-conference-minted.tex

711 Brackets work as designed:
712 <test>
713 One can also input backquotes in verbatim text: \verb|`test`|.
```

IV. CONCLUSION AND OUTLOOK

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

ACKNOWLEDGMENT

Identification of funding sources and other support, and thanks to individuals and groups that assisted in the research and the preparation of the work should be included in an acknowledgment section, which is placed just before the reference section in your document [4].

In the bibliography, use \textsuperscript for "st", "nd", ...: E.g., "The 2nd conference on examples". When you use JabRef, you can use the clean up command to achieve that. See https://help.jabref.org/en/CleanupEntries for an overview of the cleanup functionality.

REFERENCES

- [1] O. Kopp et al., "Winery A Modeling Tool for TOSCA-based Cloud Applications," in Proceedings of 11th International Conference on Service-Oriented Computing (ICSOC'13), ser. LNCS, vol. 8274. Springer Berlin Heidelberg, 2013, pp. 700–704.
- [2] T. Binz, G. Breiter, F. Leymann, and T. Spatzier, "Portable Cloud Services Using TOSCA," *IEEE Internet Computing*, vol. 16, no. 03, pp. 80–85, May 2012.
- [3] M. Scharrer, *The mwe Package*, 2017. [Online]. Available: http://texdoc.net/mwe
- [4] B. Veytsman, "Latex class for the association for computing machinery – acknowledgement information," Aug. 2021. [Online]. Available: https://github.com/borisveytsman/acmart/blob/ 1704c8bf7eee92a1515ff755f5118b6a22bb1f8e/samples/samples.dtx# L709

All links were last followed on October 5, 2020.