

Acceso ftp anónimo en ProFTPD

Debe activarse la sección Anonymous del archivo `/etc/proftpd/proftpd.conf`

```
# A basic anonymous configuration, no upload directories.

<Anonymous ~ftp>
    User ftp
    Group nogroup
    # We want clients to be able to login with "anonymous" as well as
    "ftp"
    UserAlias anonymous ftp
    # Cosmetic changes, all files belongs to ftp user
    DirFakeUser on ftp
    DirFakeGroup on ftp

    RequireValidShell off

    # Limit the maximum number of anonymous logins
    MaxClients 10

    # We want 'welcome.msg' displayed at login, and '.message'
    displayed
    # in each newly chdired directory.
    DisplayLogin welcome.msg
    DisplayChdir .message

    # Limit WRITE everywhere in the anonymous chroot
    <Directory *>
        <Limit WRITE>
            DenyAll
        </Limit>
    </Directory>
```

```

# Uncomment this if you're brave.

# <Directory incoming>

# # Umask 022 is a good standard umask to prevent new files and
dirs

# # (second parm) from being group and world writable.

# Umask 022 022

# <Limit READ WRITE>

# DenyAll

# </Limit>

# <Limit STOR>

# AllowAll

# </Limit>

# </Directory>


</Anonymous>


```

Podemos desplazarnos a la ruta del directorio home de proftpd

```
cd ~ftp
```

Podemos colocar los archivos que queramos ofrecer en nuestro acceso anónimo

 Símbolo del sistema - docker exec -it f2 bash

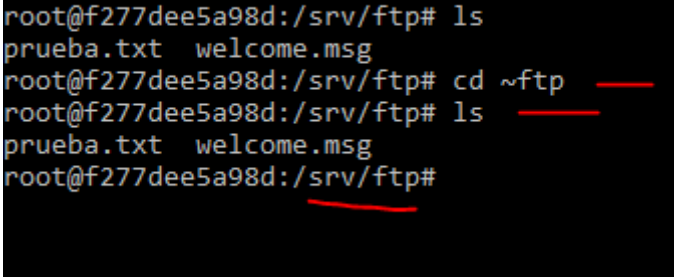

```

root@f277dee5a98d:/srv/ftp# ls
prueba.txt  welcome.msg
root@f277dee5a98d:/srv/ftp# cd ~ftp
root@f277dee5a98d:/srv/ftp# ls
prueba.txt  welcome.msg
root@f277dee5a98d:/srv/ftp#

```

Reiniciamos el servidor FTP

Comprobamos status y arrancamos el servidor FTP

```
/etc/init.d/proftpd status
```

```
/etc/init.d/proftpd start
```

```
/etc/init.d/proftpd restart
```

