



Irregularly Sampled Time Series

$$\mathbf{x} = (\mathbf{v}, \mathbf{m}, t)$$

Feature Trajectories

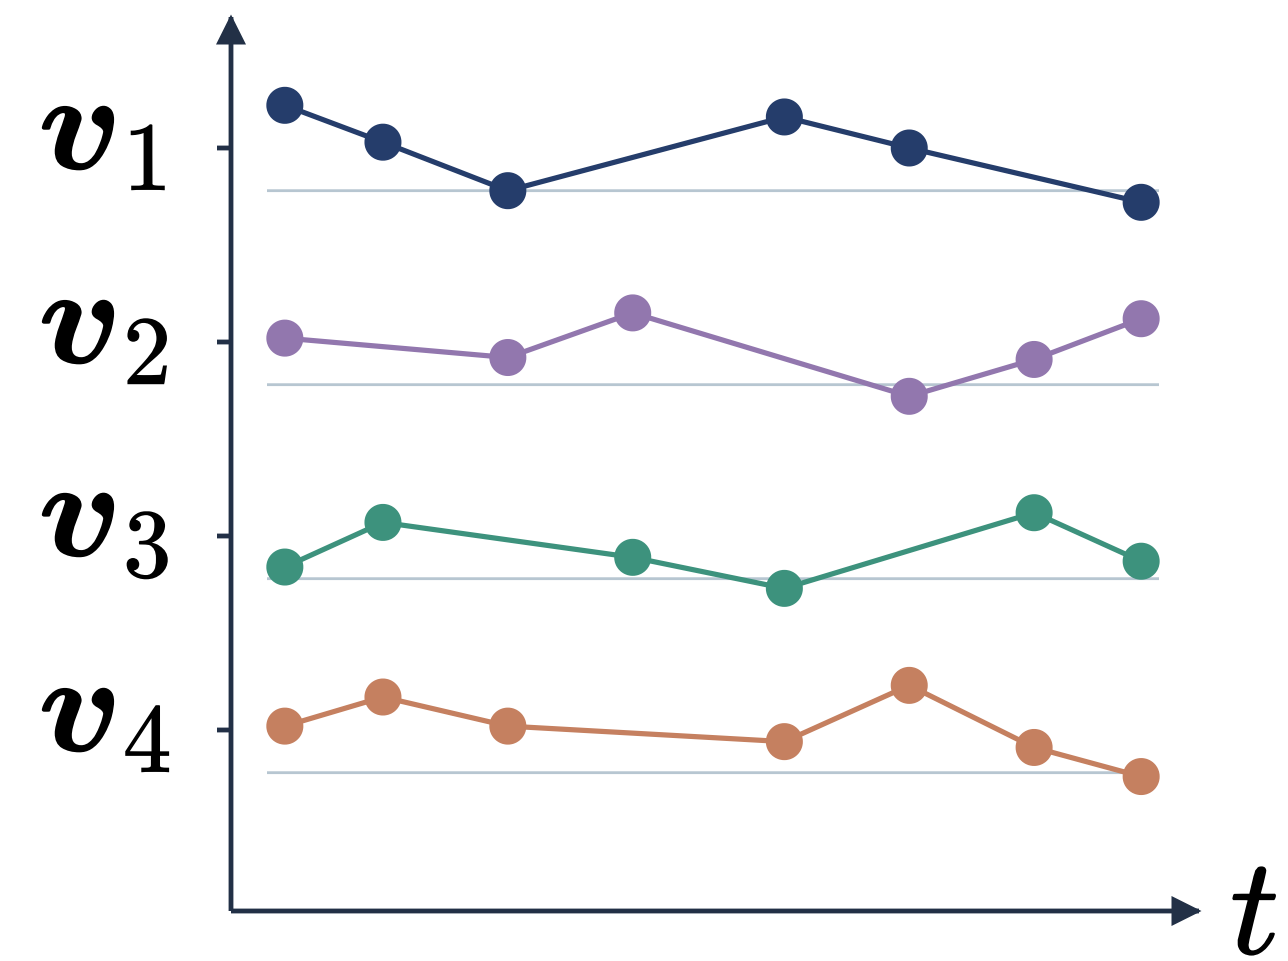


Observation Mask

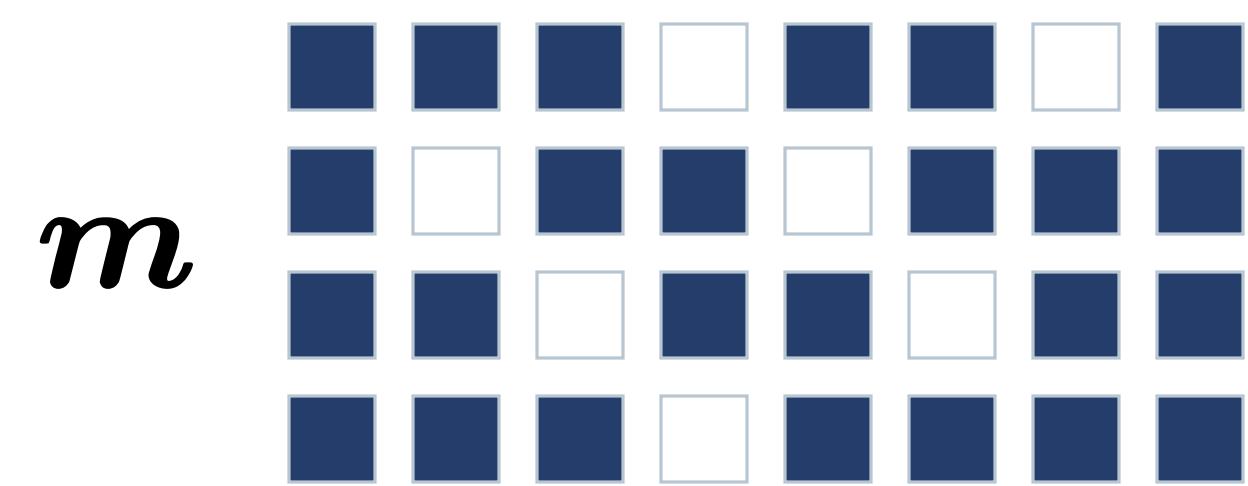


- Observed (1)
- Missing (0)

1. Complementary Pretraining

Feature-Centric Branch

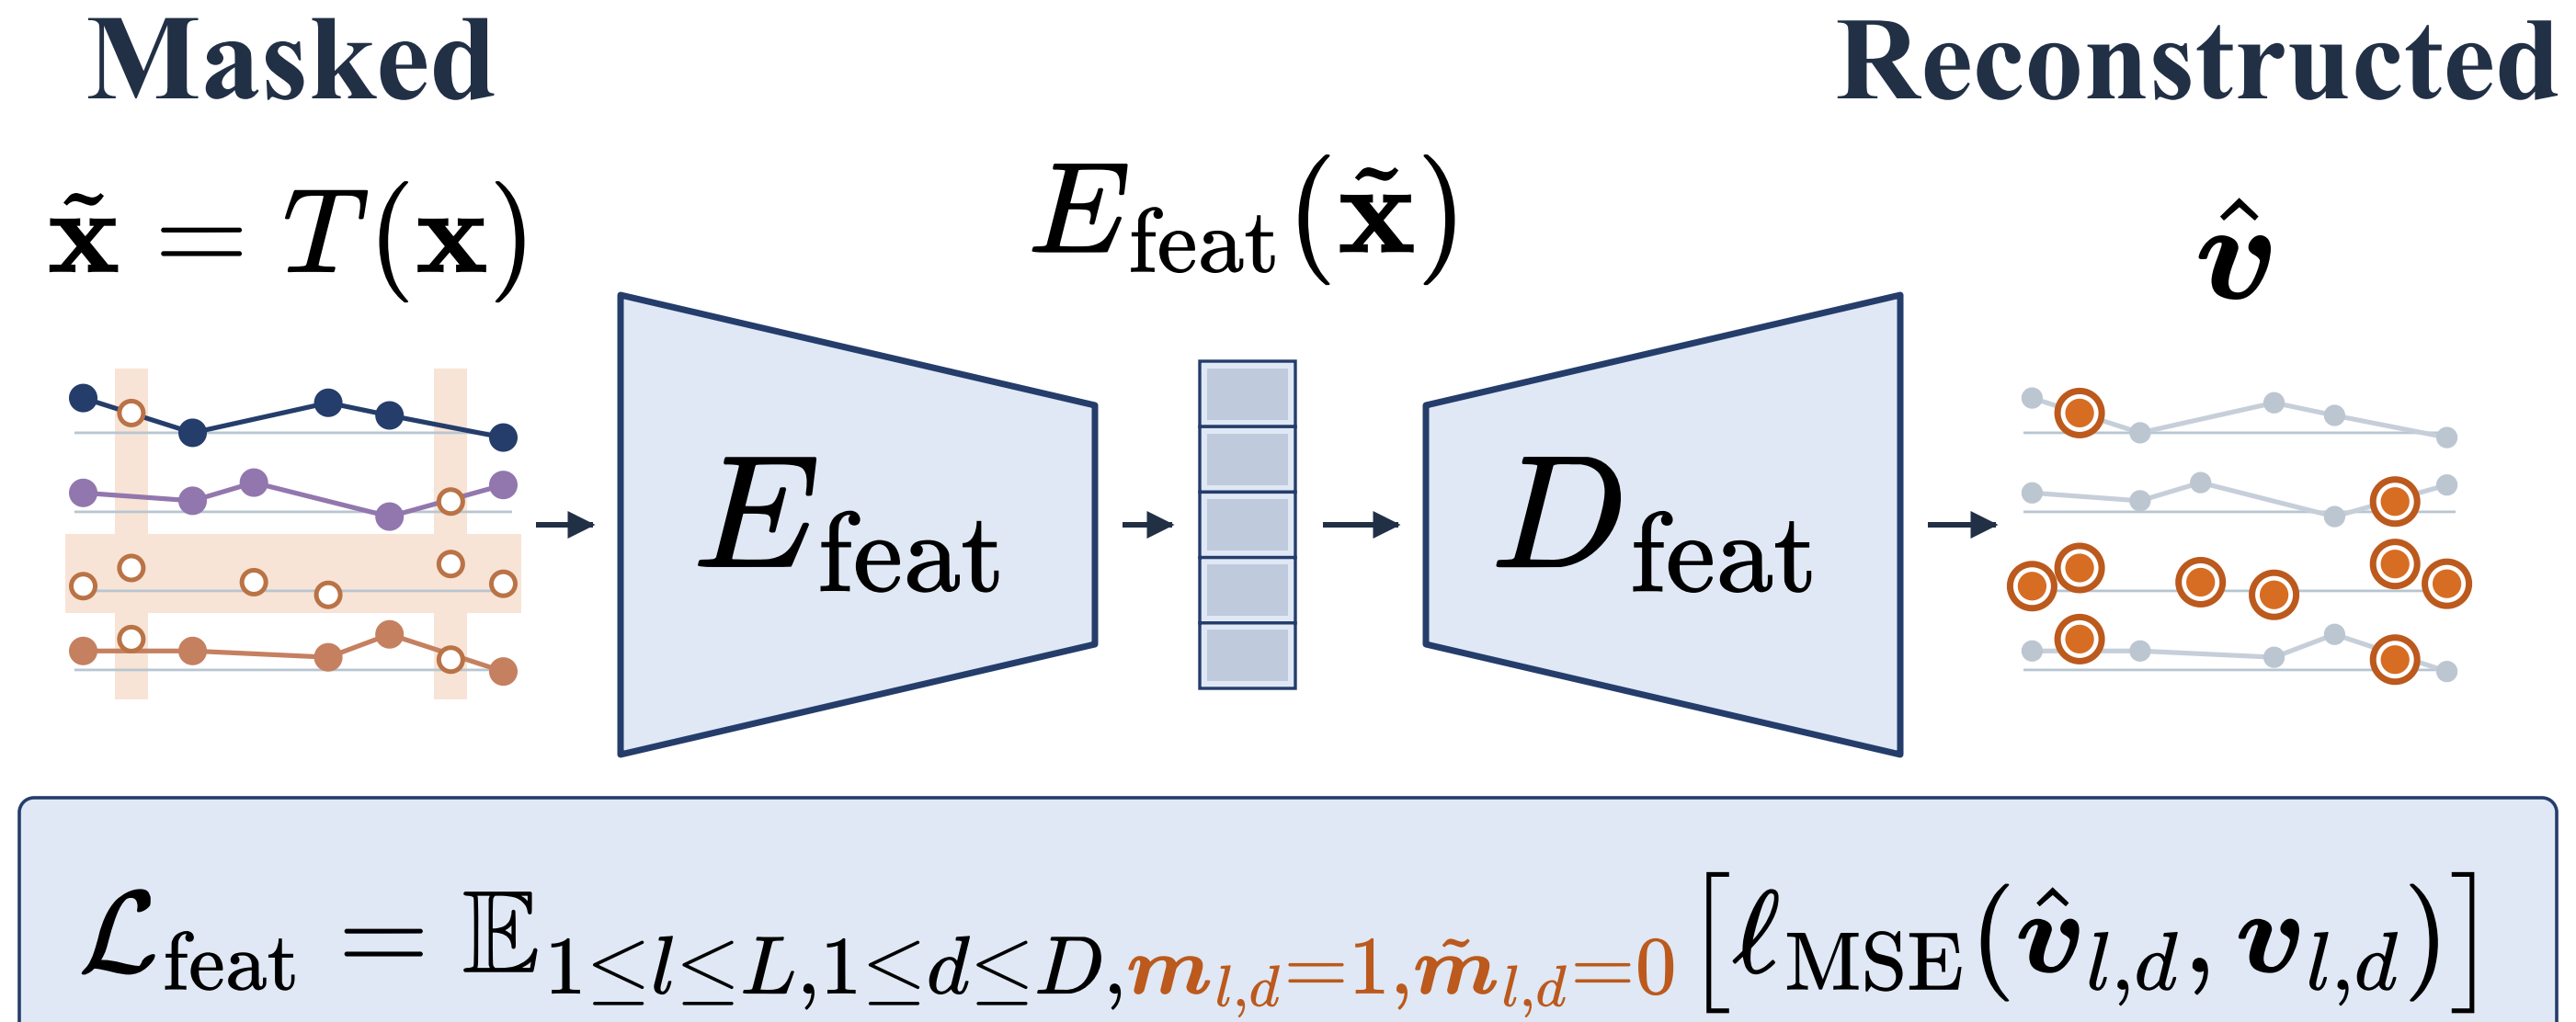

Sampling-Centric Branch

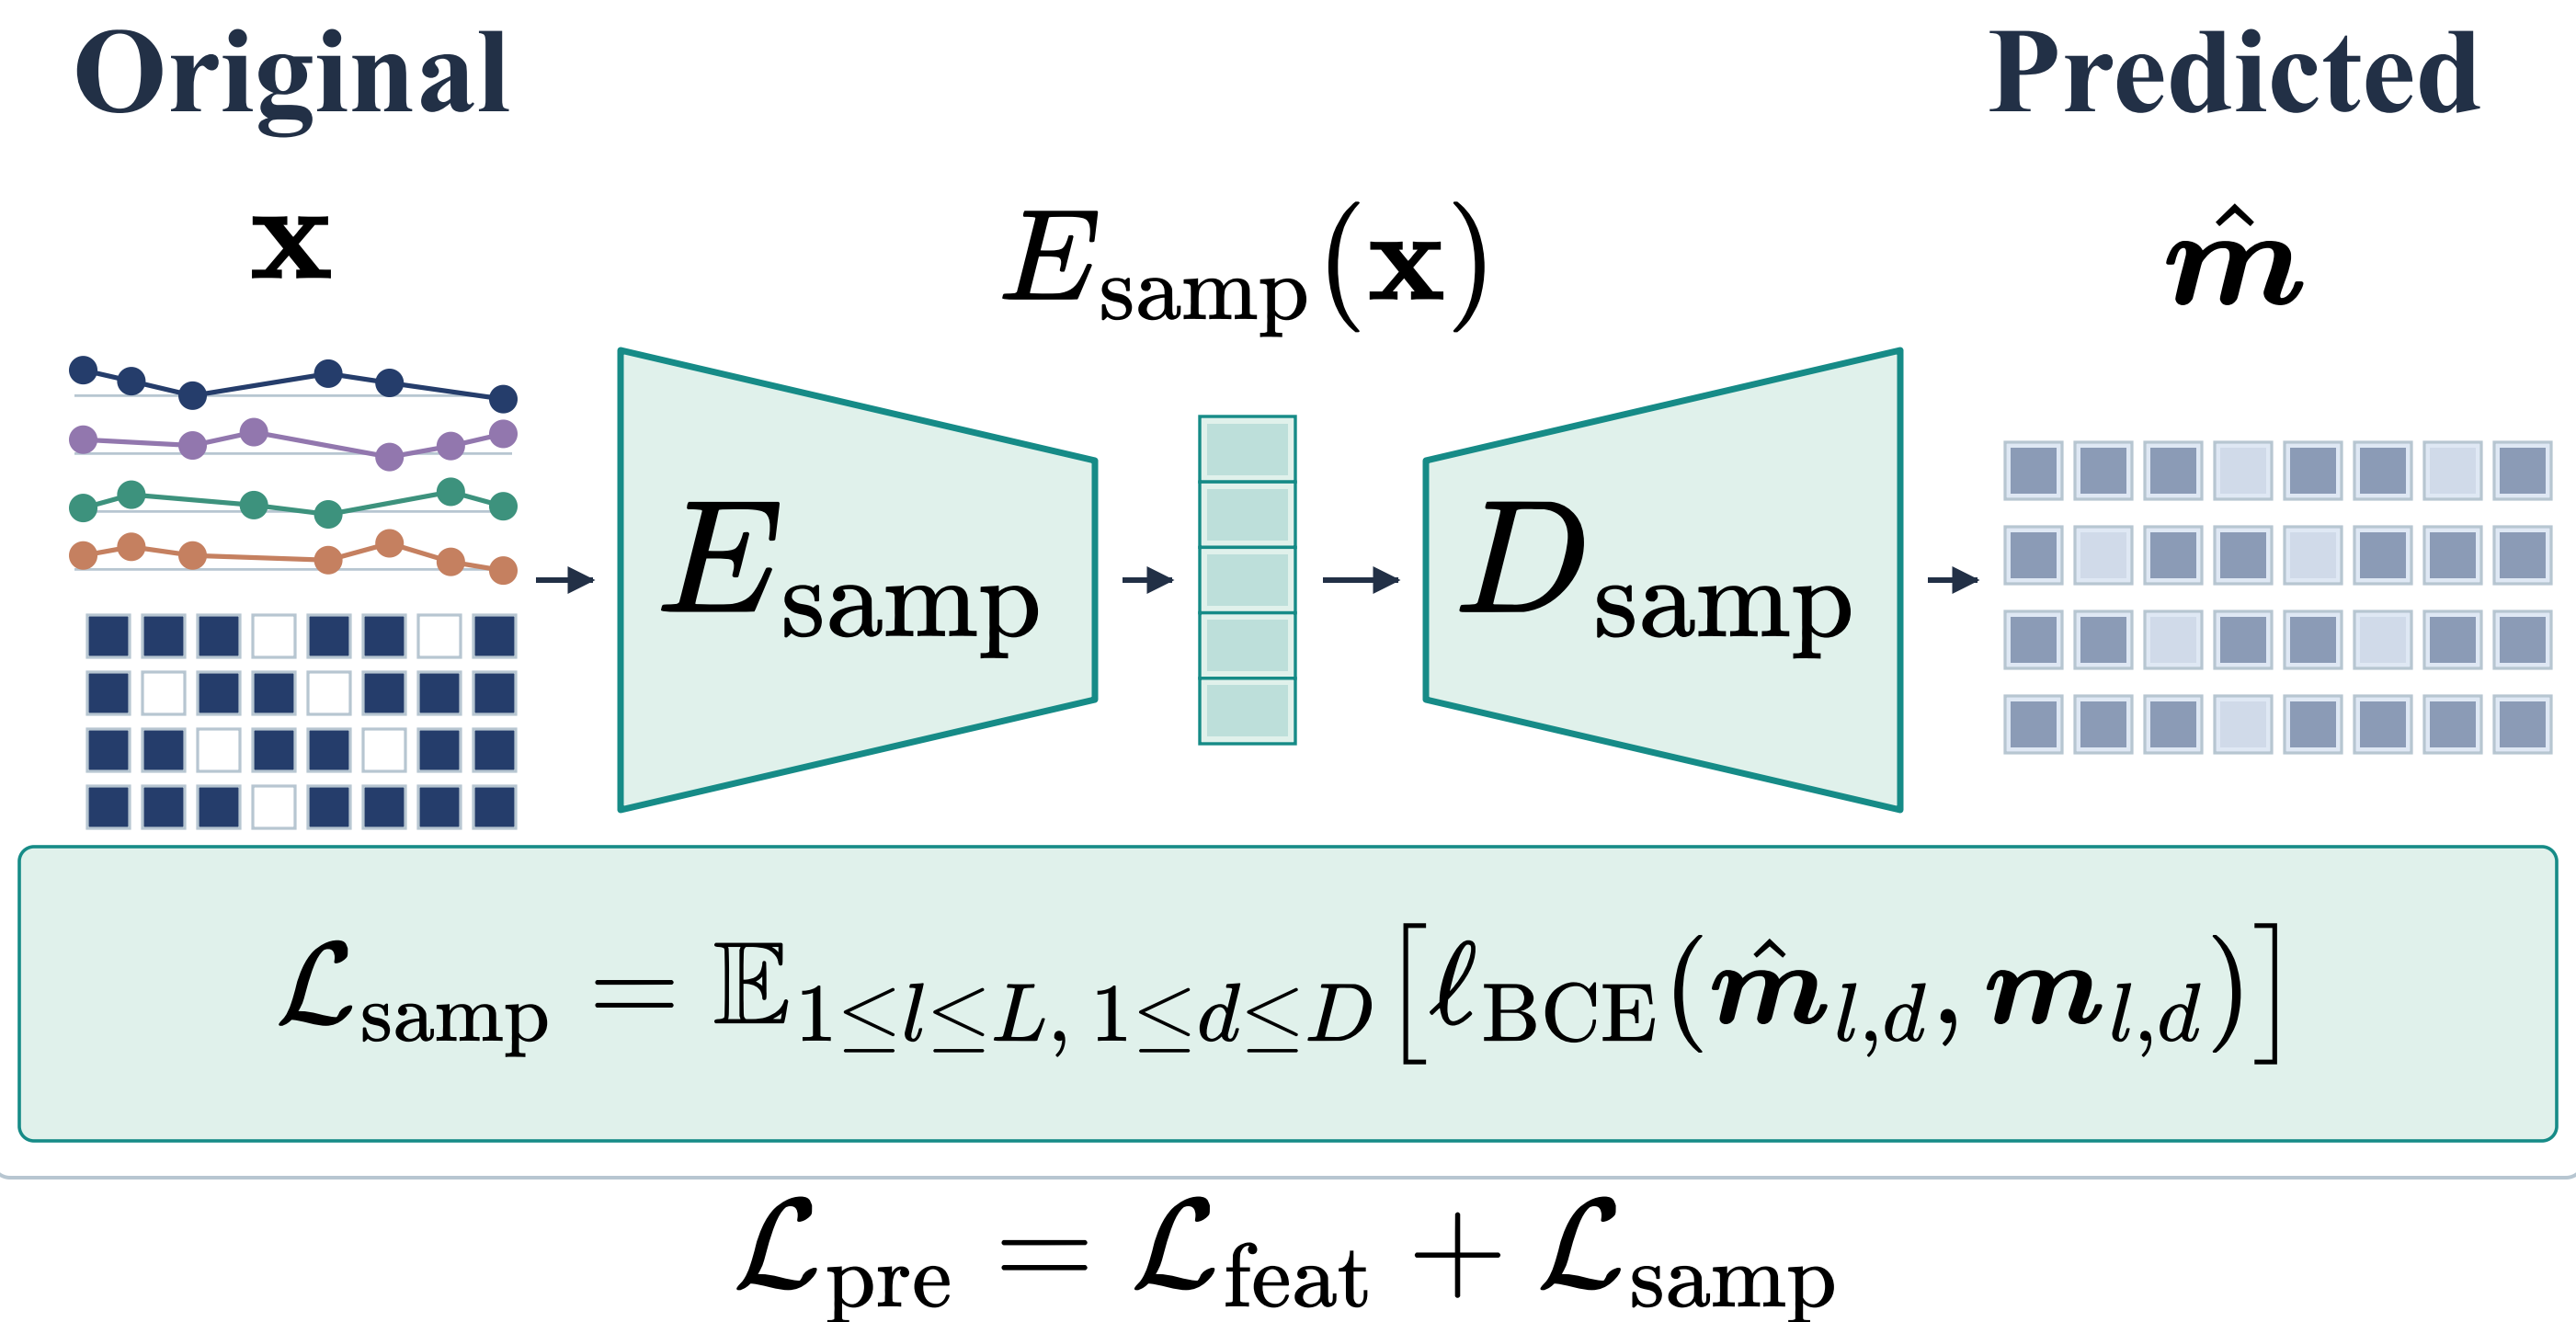


2. Robust Learning

K Sampling Views


$$\tilde{\mathbf{x}}^{(k)} = T_k(\mathbf{x})$$

Original

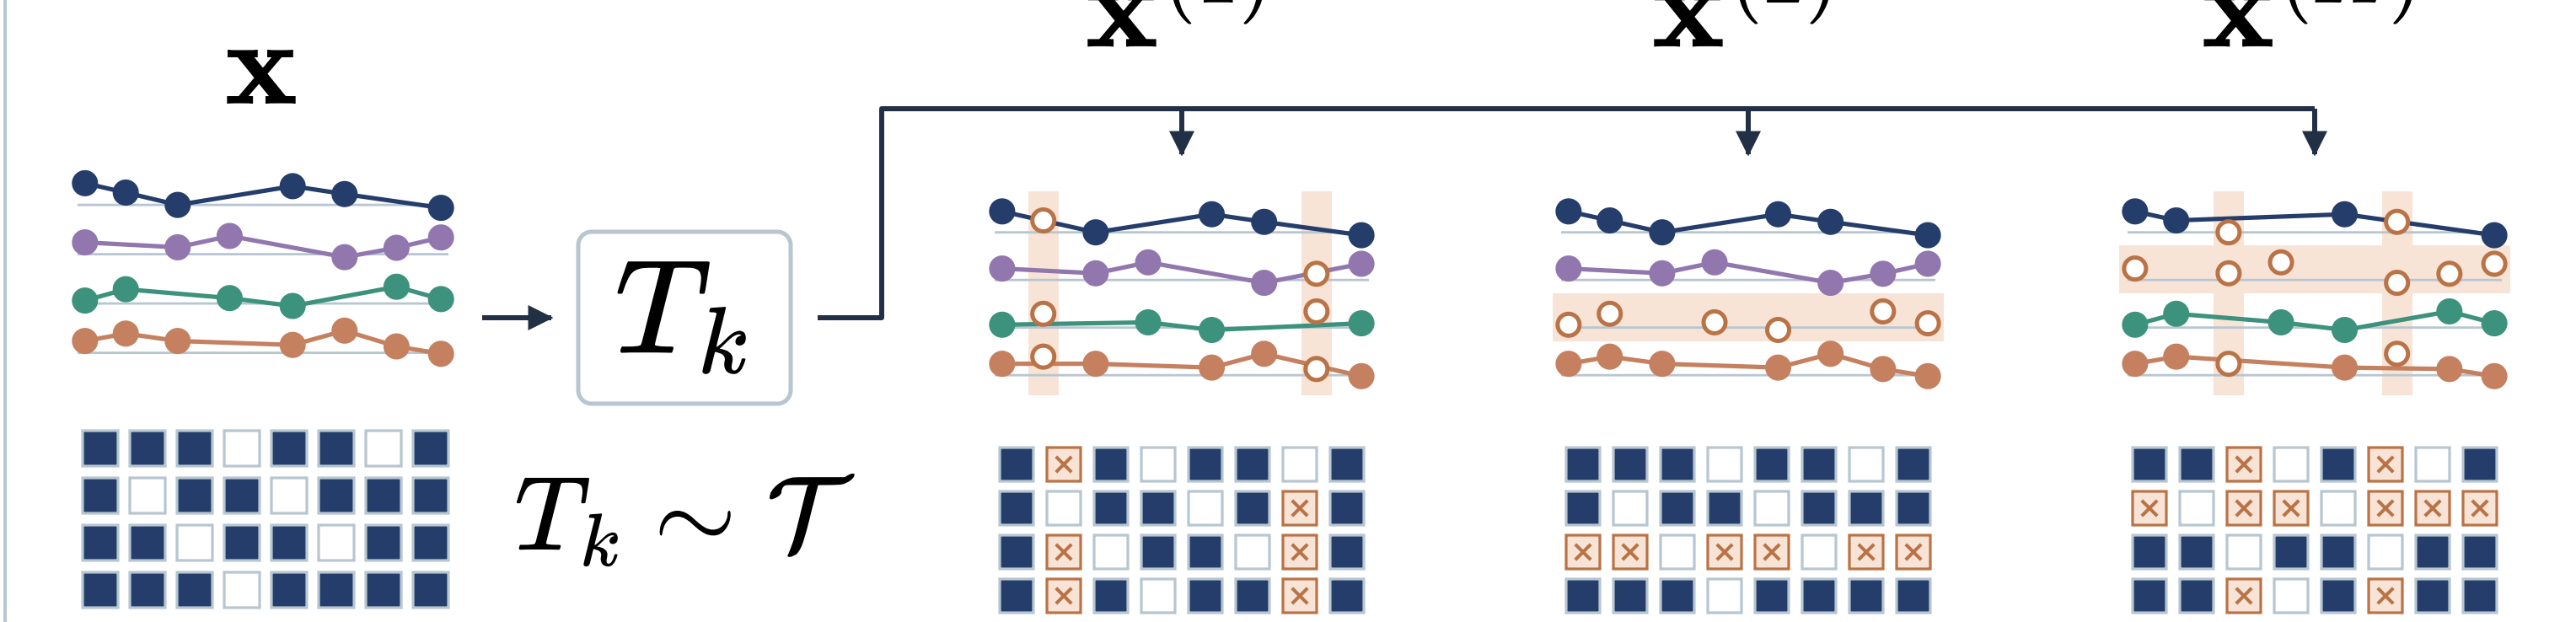

PRISM Predictor

$$F(\mathbf{x}) = H([E_{\text{feat}}(\mathbf{x}); E_{\text{samp}}(\mathbf{x})])$$

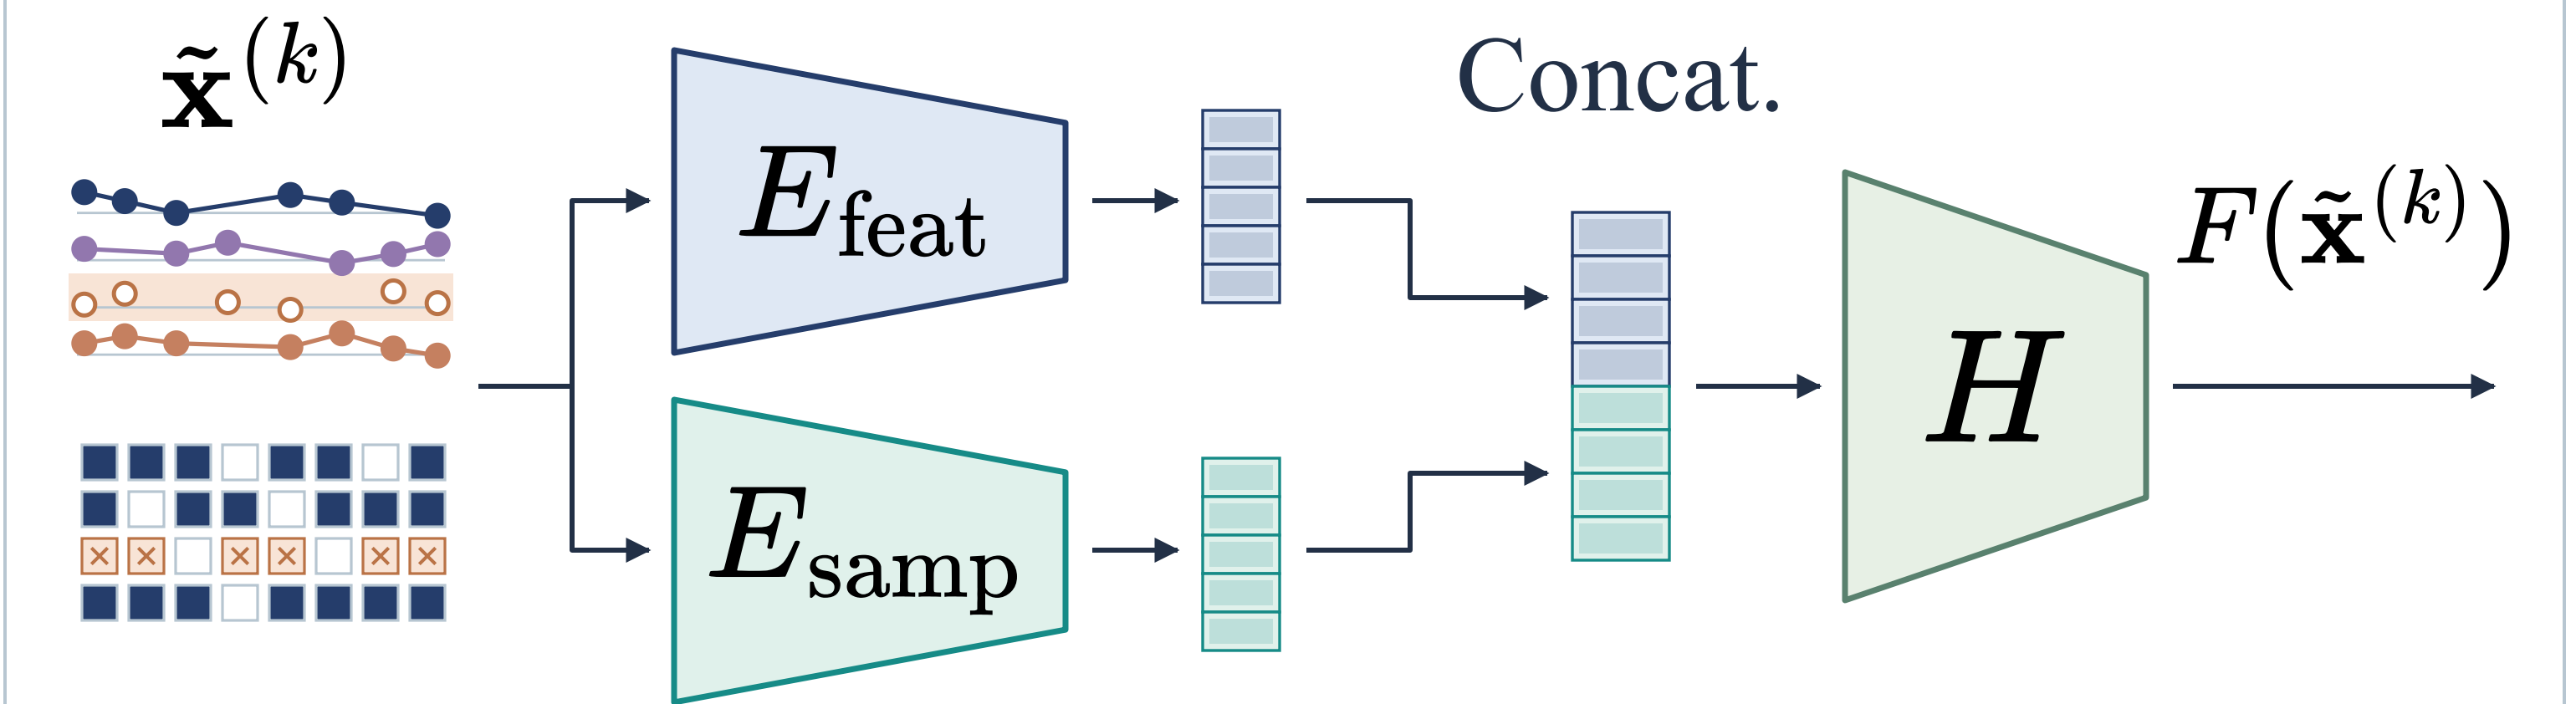

Per-View Cross-Entropy

$$\ell^{(k)} = \ell_{\text{CE}}(F(\tilde{\mathbf{x}}^{(k)}), y)$$

$$\ell^{(1)} \quad \ell^{(2)} \quad \dots \quad \ell^{(K)}$$

$$\mathcal{L}_{\text{prism}} = \max_{k \in \{1, \dots, K\}} \ell_{\text{CE}}(F(\tilde{\mathbf{x}}^{(k)}), y)$$