

Structural Estimation of Dynamic Discrete Choice Models

The Nested Fixed Point Algorithm (NFXP)
Mathematical Programming with Equilibrium Constraints (MPEC)

Bertel Schjerning
University of Copenhagen

Econometric Society Summer School in Dynamic Structural Econometrics

University of Michigan, 3 August 2026

The Nested Fixed Point Algorithm (NFXP)

Rust (ECTA, 1987):

OPTIMAL REPLACEMENT OF GMC BUS ENGINES:
AN EMPIRICAL MODEL OF HAROLD ZURCHER



Harold Alois Zuercher June 16, 1926 - June 21, 2020 (age 94)

Who cares about Harold Zurcher?

- ▶ Occupational Choice (Keane and Wolpin, JPE 1997)
- ▶ Retirement (Rust and Phelan, ECMA 1997)
- ▶ Brand choice and advertising (Erdem and Keane, MaScience 1996)
- ▶ Choice of college major (Arcidiacono, JoE 2004)
- ▶ Individual migration decisions (Kennan and Walker, ECMA 2011)
- ▶ High school attendance and work decisions (Eckstein and Wolpin, ECMA 1999)
- ▶ Sales and dynamics of consumer inventory behavior (Hendel and Nevo, ECMA 2006)
- ▶ Advertising, learning, and consumer choice in experience good markets (Akerberg, IER 2003)
- ▶ Route choice models (Fosgerau et al, Transp. Res. B)
- ▶ Fertility and labor supply decisions (Francesconi, JoLE 2002)
- ▶ Residential and Work-location choice (Buchinsky et al, ECMA 2015)
- ▶ Equilibrium Allocations Under Alternative Waitlist Designs: Evidence From Deceased Donor Kidneys (Argarwal et al, ECMA 2021)
- ▶ Equilibrium Trade in Automobiles (Gillingham et al, JPE 2022)
- ▶ ...and many more


Who cares about Harold Zurcher?

- ▶ Occupational Choice (Keane and Wolpin, JPE 1997)
- ▶ Retirement (Rust and Phelan, ECMA 1997)
- ▶ Brand choice and advertising (Erdem and Keane, MaScience 1996)
- ▶ Choice of college major (Arcidiacono, JoE 2004)
- ▶ Individual migration decisions (Kennan and Walker, ECMA 2011)
- ▶ High school attendance and work decisions (Eckstein and Wolpin, ECMA 1999)
- ▶ Sales and dynamics of consumer inventory behavior (Hendel and Nevo, ECMA 2006)
- ▶ Advertising, learning, and consumer choice in experience good markets (Akerberg, IER 2003)
- ▶ Route choice models (Fosgerau et al, Transp. Res. B)
- ▶ Fertility and labor supply decisions (Francesconi, JoLE 2002)
- ▶ Residential and Work-location choice (Buchinsky et al, ECMA 2015)
- ▶ Equilibrium Allocations Under Alternative Waitlist Designs: Evidence From Deceased Donor Kidneys (Argarwal et al, ECMA 2021)
- ▶ **Equilibrium Trade in Automobiles** (Gillingham et al, JPE 2022)
- ▶ ...and many more

Who cares about Harold Zurcher?

- ▶ Occupational Choice (Keane and Wolpin, JPE 1997)
- ▶ Retirement (Rust and Phelan, ECMA 1997)
- ▶ Brand choice and advertising (Erdem and Keane, MaScience 1996)
- ▶ Choice of college major (Arcidiacono, JoE 2004)
- ▶ Individual migration decisions (Kennan and Walker, ECMA 2011)
- ▶ High school attendance and work decisions (Eckstein and Wolpin, ECMA 1999)
- ▶ Sales and dynamics of consumer inventory behavior (Hendel and Nevo, ECMA 2006)
- ▶ Advertising, learning, and consumer choice in experience good markets (Akerberg, IER 2003)
- ▶ Route choice models (Fosgerau et al, Transp. Res. B)
- ▶ Fertility and labor supply decisions (Francesconi, JoLE 2002)
- ▶ Residential and Work-location choice (Buchinsky et al, ECMA 2015)
- ▶ Equilibrium Allocations Under Alternative Waitlist Designs: Evidence From Deceased Donor Kidneys (Argarwal et al, ECMA 2021)
- ▶ **Equilibrium Trade in Automobiles** (Gillingham et al, JPE 2022)
- ▶ ...and many more

Big Mac Index of Dynamic Structural Econometrics

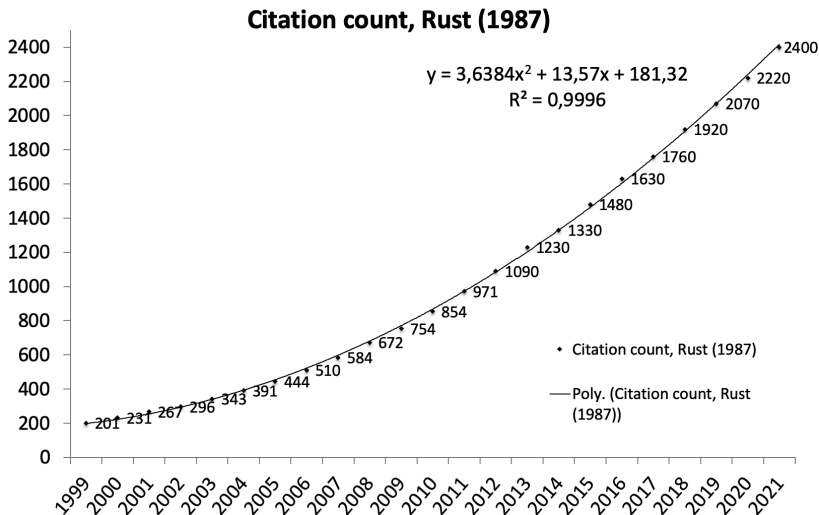

Zurcher's Bus Engine Replacement Problem

- ▶ **Choice set:** Binary choice set, $C(x_t) = \{0, 1\}$.
 - ▶ Engine replacement ($d_t = 1$) or ordinary maintenance ($d_t = 0$)
- ▶ **State variables:** Harold Zurcher observes $s_t = (x_t, \varepsilon_t)$:
 - ▶ x_t : mileage at time t since last engine overhaul/replacement
 - ▶ $\varepsilon_t = [\varepsilon_t(d_t = 0), \varepsilon_t(d_t = 1)]$: decision specific state variable
- ▶ **Utility function:** $U(x_t, \varepsilon_t, d_t; \theta_1) =$

$$u(x_t, d_t, \theta_1) + \varepsilon_t(d_t) = \begin{cases} -RC - c(0, \theta_1) + \varepsilon_t(1) & \text{if } d_t = 1 \\ -c(x_t, \theta_1) + \varepsilon_t(0) & \text{if } d_t = 0 \end{cases} \quad (1)$$

- ▶ **State variables process**
 - ▶ ε_t is iid with conditional density $q(\varepsilon_t | x_t, \theta_2)$
 - ▶ x_t (mileage since last replacement)

$$p(x_{t+1} | x_t, d_t, \theta_2) = \begin{cases} g(x_{t+1} - 0, \theta_3) & \text{if } d_t = 1 \\ g(x_{t+1} - x_t, \theta_3) & \text{if } d_t = 0 \end{cases} \quad (2)$$

If engine is replaced, state of bus regenerates to $x_t = 0$.

- ▶ **Parameters to be estimated** $\theta = (RC, \theta_1, \theta_3)$
(Fixed parameters: (β, θ_2))

Recursive form of the maximization problem

- ▶ The Bellman equation

$$V(x, \varepsilon) \equiv T(V)(x, \varepsilon) = \max_{d \in C(x)} \{ u(x, \varepsilon, d) + \beta E[V(x', \varepsilon') | x, \varepsilon, d] \}$$

- ▶ Expectations are taken over the next period values of state $s' = (x', \varepsilon')$ given it's controlled motion rule, $p(s' | s, d)$

$$E[V(x', \varepsilon') | x, \varepsilon, d] = \int_X \int_{\Omega} V(x', \varepsilon') p(x', \varepsilon' | x, \varepsilon, d) dx' d\varepsilon'$$

where $\varepsilon = (\varepsilon(1), \dots, \varepsilon(J)) \in \mathbb{R}^J$

Hard to compute fixed point V such that $T(V) = V$

- ▶ x is continuous and ε is continuous and J -dimensional
- ▶ $V(x, \varepsilon)$ is high dimensional
- ▶ Evaluating E may require high dimensional integration
- ▶ Evaluating $V(x', \varepsilon')$ may require high dimensional interpolation/approximation
- ▶ $V(x, \varepsilon)$ is non-differentiable

Rust's Assumptions

1. Additive separability in preferences (**AS**):

$$U(s_t, d) = u(x_t, d; \theta_1) + \varepsilon_t(d)$$

2. Conditional independence (**CI**):

State variables, $s_t = (x_t, \varepsilon_t)$ obeys a (conditional independent) controlled Markov process with probability density

$$p(x_{t+1}, \varepsilon_{t+1} | x_t, \varepsilon_t, d, \theta_2, \theta_3) = q(\varepsilon_{t+1} | x_{t+1}, \theta_2) p(x_{t+1} | x_t, d, \theta_3)$$

3. Extreme value Type I (EV1) distribution of ε (**EV**)

Each of the choice specific state variables, $\varepsilon_t(d)$ are assumed to be iid. extreme value distributed with CDF

$$F(\varepsilon_t(d); \mu, \lambda) = \exp(-\exp(-(\varepsilon_t(d) - \mu)/\lambda)) \text{ for } \varepsilon_t(d) \in \mathbb{R}$$

with $\mu = 0$ and $\lambda = 1$

Rust's Assumptions simplifies DP problem

$$V(x, \varepsilon) = \max_{d \in C(x)} \{u(x, d) + \varepsilon(d) + \beta \int_X \int_{\Omega} V(x', \varepsilon') p(x' | x, d) q(\varepsilon' | x') dx' d\varepsilon'\}$$

1. Separate out the deterministic part of choice specific value $v(x, d)$ (assumptions AS and CI)
2. Reformulate Bellman equation on reduced state space (assumption CI)
3. Compute the expectation of maximum using properties of EV1 (assumption EV)

1. DP problem under AS and CI

Separate out the deterministic part of choice specific value $v(x, d)$

$$V(x, \varepsilon) = \max_{d \in C(x)} \left\{ u(x, d) + \beta \int_X \left(\int_{\Omega} V(x', \varepsilon') q(\varepsilon' | x') d\varepsilon' \right) p(x' | x, d) dx' + \varepsilon(d) \right\}$$

So that

$$V(x', \varepsilon') = \max_{d \in C} \{ v(x', d) + \varepsilon'(d) \}$$

where

$$v(x, d) = u(x, d) + \beta E[V(x', \varepsilon') | x, d]$$

2a. Bellman equation in expected value function space

Let $EV(x, d) = E[V(x', \varepsilon') | x, d]$ denote the expected value function.

Because of CI we can express the Bellman equation in expected value function space

$$EV(x, d) = \Gamma(EV)(x, d) \equiv \int_X \int_{\Omega} [V(x', \varepsilon') q(\varepsilon' | x') d\varepsilon'] p(x' | x, d) dx'$$

where

$$V(x', \varepsilon') = \max_{d' \in C(x')} [u(x', d') + \beta EV(x', d') + \varepsilon'(d')]$$

- ▶ Γ is a contraction mapping with unique fixed point EV , i.e.
 $\|\Gamma(EV) - \Gamma(W)\| \leq \beta \|EV - W\|$
- ▶ Global convergence of VFI / SA
- ▶ $EV(x, d)$ is lower dimensional: does not depend on ε

2b. Bellman equation in integrated value function space

Let $\bar{V}(x) = E[V(x, \varepsilon)|x]$ denote the integrated value function

Because of CI we can express Bellman equation in integrated value function space

$$\bar{V}(x) = \bar{\Gamma}(\bar{V})(x) \equiv \int_{\Omega} V(x, \varepsilon) q(\varepsilon|x) d\varepsilon$$

where

$$V(x, \varepsilon) = \max_{d \in C(x)} [u(x, d) + \varepsilon(d) + \beta \int_X \bar{V}(x') p(x'|x, d) dx']$$

- ▶ $\bar{\Gamma}$ is a contraction mapping with unique fixed point $\bar{V}$, i.e.
 $\|\bar{\Gamma}(\bar{V}) - \bar{\Gamma}(W)\| \leq \beta \|\bar{V} - W\|$
- ▶ Global convergence of VFI / SA
- ▶ $\bar{V}(x)$ is lower dimensional: does not depend on ε and d

3. Compute the expectation of maximum under EV

We can express expectation of maximum using properties of EV1 distribution (assumption EV)

Expectation of maximum, $\bar{V}(x)$, can be expressed as "the log-sum"

$$\bar{V}(x) = E \left[\max_{d \in \{1, \dots, J\}} \{v(x, d) + \lambda \varepsilon(d)\} \mid x \right] = \lambda \log \sum_{j=1}^J \exp(v(x, j)/\lambda)$$

Conditional choice probability, $P(x, d)$ has closed form logit expression

$$\begin{aligned} P(d \mid x) &= E \left[\mathbb{1} \left\{ d = \arg \max_{j \in \{1, \dots, J\}} \{v(x, j) + \lambda \varepsilon(j)\} \right\} \mid x \right] \\ &= \frac{\exp(v(x, d)/\lambda)}{\sum_{j=1}^J \exp(v(x, j)/\lambda)} \end{aligned}$$

HUGE benefits

- ▶ Avoids J dimensional numerical integration over ε
- ▶ $P(d \mid x)$, $\bar{V}(x)$ and $EV(x, d)$ are smooth functions.

The DP problem under AS, CI and EV

Putting all this together

- ▶ Conditional Choice Probabilities (CCPs) are given by

$$P(d|x, \theta) = \frac{\exp \{u(x, d, \theta_1) + \beta EV_\theta(x, d)\}}{\sum_{j \in C(x)} \exp \{u(x, j, \theta_1) + \beta EV_\theta(x, j)\}}$$

- ▶ The expected value function can be found as the unique fixed point to the contraction mapping Γ_θ , defined by

$$\begin{aligned} EV_\theta(x, d) &= \Gamma_\theta(EV_\theta)(x, d) \\ &= \int_y \ln \left[\sum_{d' \in C(y)} \exp [u(y, d'; \theta_1) + \beta EV_\theta(y, d')] \right] \\ &\quad p(dy|x, d, \theta_2) \end{aligned}$$

- ▶ We have used the subscript θ to emphasize that the Bellman operator, Γ_θ depends on the parameters.
- ▶ In turn, the fixed point, EV_θ , and the resulting CCPs, $P(d|x, \theta)$ are implicit functions of the parameters we wish to estimate.

How to deal with continuous mileage state?

Rust discretize the mileage state space x into n grid points

$$X = \{x_1, \dots, x_n\} \text{ with } x_1 = 0$$

Mileage transition probability: for $l = 0, \dots, L$

$$p(x' | \hat{x}_k, d, \theta_2) = \begin{cases} Pr\{x' = x_{k+l} | \theta_3\} = \theta_{3,l} & \text{if } d = 0 \\ Pr\{x' = x_{1+l} | \theta_3\} = \theta_{3,l} & \text{if } d = 1 \end{cases}$$

- ▶ where $\theta_3 = [\theta_{3,1}, \dots, \theta_{3,L}]$, $\theta_{3,0} = 1 - \sum_{l=1}^L \theta_{3,l}$, and $\theta_{3,l} \geq 0$
- ▶ Mileage in the next period x' can move up at most L grid points.
- ▶ L is determined by the empirical distribution of mileage.

State transition matrix for mileage with $L=2$

$$\Pi(d = \text{keep})_{n \times n} = \begin{pmatrix} \theta_{3,0} & \theta_{3,1} & \theta_{3,2} & 0 & \cdot & \cdot & \cdot & 0 \\ 0 & \theta_{3,0} & \theta_{3,1} & \theta_{3,2} & 0 & \cdot & \cdot & 0 \\ 0 & 0 & \theta_{3,0} & \theta_{3,1} & \theta_{3,2} & 0 & \cdot & 0 \\ \cdot & \cdot & \cdot & \cdot & \cdot & \cdot & \cdot & \cdot \\ 0 & & & & \theta_{3,0} & \theta_{3,1} & \theta_{3,2} & 0 \\ 0 & & & & & \theta_{3,0} & \theta_{3,1} & \theta_{3,2} \\ 0 & & & & & & \theta_{3,0} & 1 - \theta_{3,0} \\ 0 & 0 & & & & & & 1 \end{pmatrix}$$

$$\Pi(d = \text{replace})_{n \times n} = \begin{pmatrix} \theta_{3,0} & \theta_{3,1} & \theta_{3,2} & 0 & \cdot & \cdot & \cdot & 0 \\ \theta_{3,0} & \theta_{3,1} & \theta_{3,2} & 0 & \cdot & \cdot & \cdot & 0 \\ \theta_{3,0} & \theta_{3,1} & \theta_{3,2} & 0 & \cdot & \cdot & \cdot & 0 \\ \theta_{3,0} & \theta_{3,1} & \theta_{3,2} & 0 & \cdot & \cdot & \cdot & 0 \\ \theta_{3,0} & \theta_{3,1} & \theta_{3,2} & 0 & \cdot & \cdot & \cdot & 0 \\ \theta_{3,0} & \theta_{3,1} & \theta_{3,2} & 0 & \cdot & \cdot & \cdot & 0 \\ \theta_{3,0} & \theta_{3,1} & \theta_{3,2} & 0 & \cdot & \cdot & \cdot & 0 \\ \theta_{3,0} & \theta_{3,1} & \theta_{3,2} & 0 & \cdot & \cdot & \cdot & 0 \end{pmatrix}$$

Bellman equation in matrix form

Bellman equation in **expected value** function space

$$EV(d) = \Gamma(EV) = \Pi(d) \ln \left[\sum_{d'} \exp[u(d') + \beta EV(d')] \right]$$

Bellman equation in **integrated value** function space

$$\bar{V} = \bar{\Gamma}(\bar{V}) = \ln \left[\sum_{d'} \exp[u(d') + \beta \Pi(d') \bar{V}] \right]$$

where

- ▶ $u(d) = [u(x_1, d), \dots, u(x_n, d)]$
- ▶ $EV(d) = [EV(x_1, d), \dots, EV(x_n, d)]$
- ▶ $\bar{V} = [\bar{V}(x_1), \dots, \bar{V}(x_n)]$
- ▶ $\Pi(d)$ is a $n \times n$ state transition matrix conditional on decision d

Structural Estimation under Rust's Assumptions

Data: $(d_{i,t}, x_{i,t})$, $t = 1, \dots, T_i$ and $i = 1, \dots, N$

Log likelihood function

$$L(\theta, EV_\theta) = \sum_{i=1}^N \ell_i^f(\theta, EV_\theta)$$

$$\ell_i^f(\theta, EV_\theta) = \sum_{t=2}^{T_i} \log(P(d_{i,t}|x_{i,t}, \theta)) + \sum_{t=2}^{T_i} \log(p(x_{i,t}|x_{i,t-1}, d_{i,t-1}, \theta_3))$$

where

$$P(d|x, \theta) = \frac{\exp\{u(x, d, \theta_1) + \beta EV_\theta(x, d)\}}{\sum_{d' \in \{0,1\}} \{u(x, d', \theta_1) + \beta EV_\theta(x, d')\}}$$

and

$$\begin{aligned} EV_\theta(x, d) &= \Gamma_\theta(EV_\theta)(x, d) \\ &= \int_y \ln \left[\sum_{d' \in \{0,1\}} \exp[u(y, d'; \theta_1) + \beta EV_\theta(y, d')] \right] p(dy|x, d, \theta_3) \end{aligned}$$

The Nested Fixed Point Algorithm

Since the contraction mapping Γ_θ always has a unique fixed point, the constraint $EV_\theta = \Gamma(EV_\theta)$ implies that the fixed point EV_θ is an implicit function of θ .

Hence, NFXP solves the unconstrained optimization problem

$$\max_{\theta} L(\theta, EV_\theta)$$

Outer loop (Hill-climbing algorithm):

- ▶ Likelihood function $L(\theta, EV_\theta)$ is maximized w.r.t. θ
- ▶ Quasi-Newton algorithm: Usually BHHH, BFGS or a combination.
- ▶ Each evaluation of $L(\theta, EV_\theta)$ requires solution of EV_θ

Inner loop (fixed point algorithm):

The implicit function EV_θ defined by $EV_\theta = \Gamma(EV_\theta)$ is solved by:

- ▶ Successive Approximations (SA) / Value Function Iterations (VFI)
- ▶ Newton-Kantorovich (NK) Iterations

Structural Estimates, n=175

TABLE X
STRUCTURAL ESTIMATES FOR COST FUNCTION $c(x, \theta_1) = .001\theta_{11}x$
FIXED POINT DIMENSION = 175
(Standard errors in parentheses)

Parameter		Data Sample			Heterogeneity Test	
Discount Factor	Estimates Log-Likelihood	Groups 1, 2, 3 3864 Observations	Group 4 4292 Observations	Groups 1, 2, 3, 4 8156 Observations	LR Statistic (df = 6)	Marginal Significance Level
$\beta = .9999$	RC	11.7257 (2.597)	10.896 (1.581)	9.7687 (1.226)	237.53	1.89E - 48
	θ_{11}	2.4569 (.9122)	1.1732 (0.327)	1.3428 (0.315)		
	θ_{30}	.0937 (.0047)	.1191 (.0050)	.1071 (.0034)		
	θ_{31}	.4475 (.0080)	.5762 (.0075)	.5152 (.0055)		
	θ_{32}	.4459 (.0080)	.2868 (.0069)	.3621 (.0053)		
	θ_{33}	.0127 (.0018)	.0158 (.0019)	.0143 (.0013)		
	LL	-3993.991	-4495.135	-8607.889		
$\beta = 0$	RC	8.2969 (1.0477)	7.6423 (.7204)	7.3113 (0.5073)	241.78	2.34E - 49
	θ_{11}	56.1656 (13.4205)	36.6692 (7.0675)	36.0175 (5.5145)		
	θ_{30}	.0937 (.0047)	.1191 (.0050)	.1070 (.0034)		
	θ_{31}	.4475 (.0080)	.5762 (.0075)	.5152 (.0055)		
	θ_{32}	.4459 (.0080)	.2868 (.0069)	.3622 (.0053)		
	θ_{33}	.0127 (.0018)	.0158 (.0019)	.0143 (.0143)		
	LL	-3996.353	-4496.997	-8614.238		
Myopia tests:	LR Statistic (df = 1)	4.724	3.724	12.698		
$\beta = 0$ vs. $\beta = .9999$	Marginal Significance Level	0.0297	0.0536	.00037		

MATLAB implementation, n=175, (replication of Table X)

Output from run_busdata.m:

```
fzp386 — cefhelper (Renderer) • MATLAB_maci64 -nodesktop — 89x35

>> run_busdata
Structural Estimation using busdata from Rust(1987)
Bustypes      = [ 1  2  3  4 ]
Beta          = 0.99990
n             = 175.00000
Sample size   = 8156.00000


Method nfxp (pmle)
Param.        Estimates      s.e.      t-stat
-----
RC            9.7910         1.2684     7.7190
c             1.3486         0.3458     3.8996

log-likelihood = -300.57017
runtime (seconds) = 0.07795
g'*inv(h)*g    = 2.65552e-09

Method nfxp (mle)
Param.        Estimates      s.e.      t-stat
-----
RC            9.7915         1.2689     7.7168
c             1.3488         0.3460     3.8982
p             0.1070         0.0034     31.2111
p             0.5152         0.0055     93.0533
p             0.3622         0.0053     68.0413
p             0.0143         0.0013     10.8947
p             0.0009         0.0003     2.6469

log-likelihood = -8607.88844
runtime (seconds) = 0.07484
g'*inv(h)*g    = 7.26854e-09
>>
```

Estimated Hazard Functions

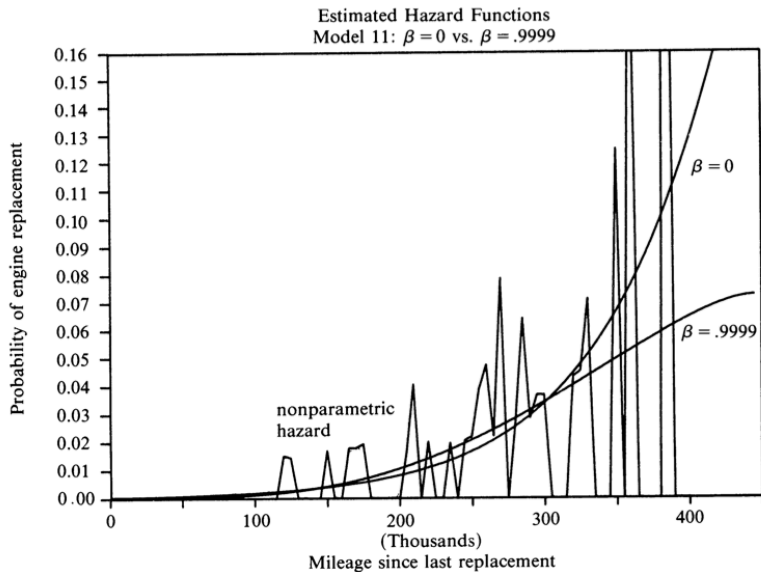

Equilibrium bus mileage and demand for engines


- ▶ Let π be the long run stationary (or equilibrium) distribution of the controlled process $\{i_t, x_t\}$
- ▶ π is then given by the unique solution to the functional equation

$$\pi(x, i) = \int_y \int_j P(i|x, \theta) p(x|y, j, \theta_3) \pi(dy, dj)$$


- ▶ π is the ergodic distribution of the controlled state transition matrix
- ▶ Clearly the equilibrium distribution of π is an implicit function of the structural parameters θ , which we emphasize by the notation π_θ
- ▶ Given π_θ , we can also obtain the following simple formula for annual equilibrium demand for engines as a function of RC

$$d(RC) = 12M \int_0^\infty \pi_\theta(dx, 1)$$

Equilibrium Bus mileage, bus group 4

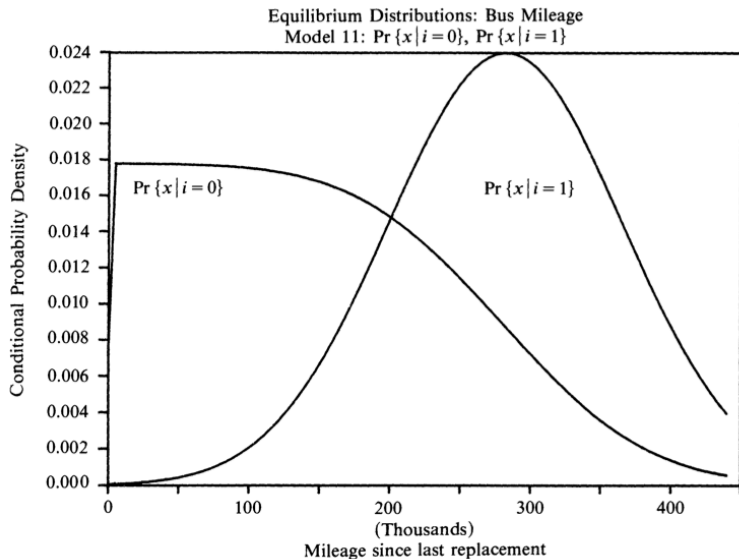

Demand Function, bus group 4

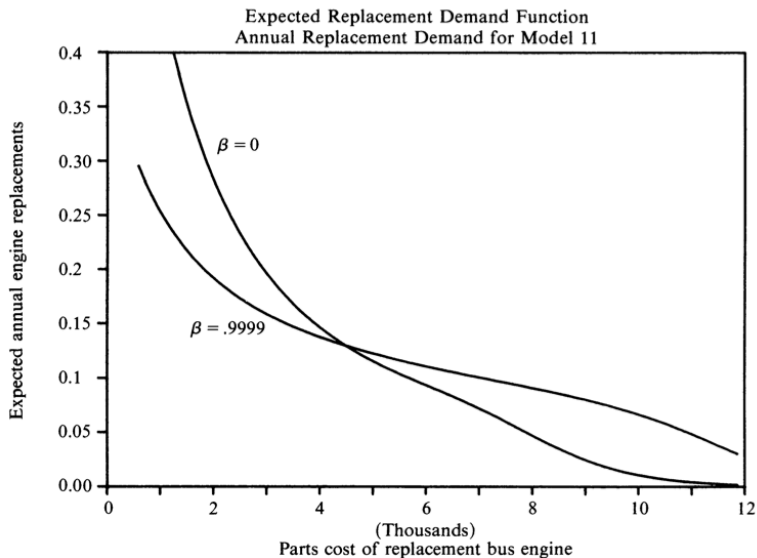

Mathematical Programming with Equilibrium Constraints

$$\max_{\theta, EV} \ell(\theta, EV) \quad \text{subject to} \quad EV - \Gamma_{\theta}(EV) = 0$$

- ▶ **Decision variables:** structural parameters θ and all expected values EV .
- ▶ **Equilibrium constraints:** the Bellman fixed point is imposed at every state rather than solved inside each likelihood evaluation.
- ▶ **Why it can work:** the constraint Jacobian is sparse, and modern nonlinear-programming solvers can exploit analytic derivatives.
- ▶ **What does not change:** preferences, transitions, likelihood, and the equilibrium restrictions are identical to NFXP.



NFXP eliminates EV ; MPEC keeps EV and constrains it.

Su and Judd, Econometrica (2012), "Constrained Optimization Approaches to Estimation of Structural Models."



Sparsity patterns for MPEC

Two key factors in efficient implementations:

- ▶ Provide analytic-derivatives (huge improvement in speed)
- ▶ Exploit sparsity pattern in constraint Jacobian (huge saving in memory requirement)

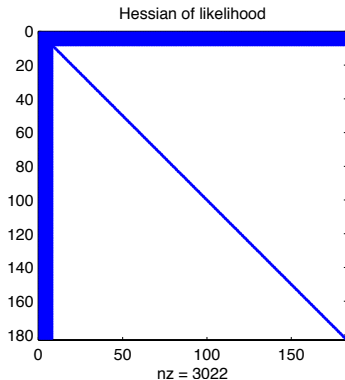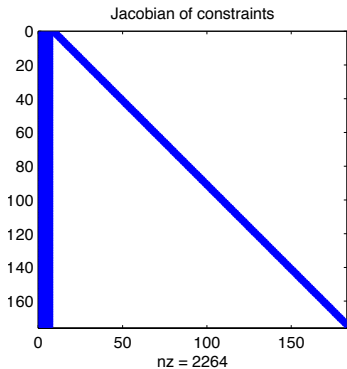

Transition matrix is sparse

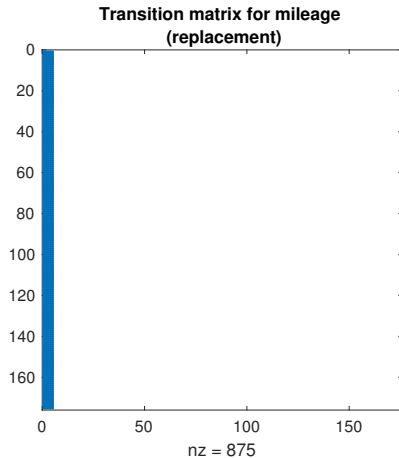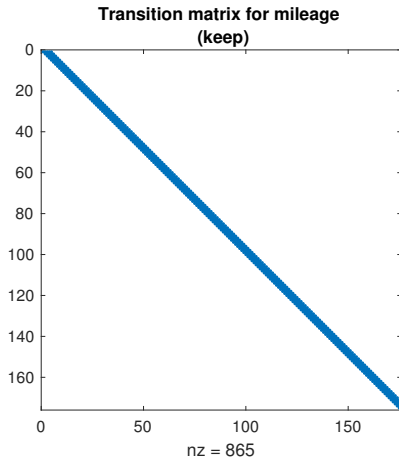

Monte Carlo: Rust's Table X - Group 1,2, 3

Su and Judd (ECMA, 2012) did a head to head comparison between NFXP and MPEC

Experimental Design

- ▶ Fixed point dimension: $n = 175$
- ▶ Maintenance cost function: $c(x, \theta_1) = 0.001 * \theta_1 * x$
- ▶ Mileage transition: stay or move up at most $L = 3$ grid points
- ▶ True parameter values:
 - ▶ $\theta_1 = 2.457$
 - ▶ $RC = 11.726$
 - ▶ $\theta_3 = (\theta_{3,0}, \theta_{3,1}, \theta_{3,2}, \theta_{3,3}) = (0.0937, 0.4475, 0.4459, 0.0127)$
- ▶ Solve for EV at the true parameter values
- ▶ Simulate 250 datasets of monthly data for 10 years and 50 buses

Is NFXP a dinosaur method?

TABLE II
NUMERICAL PERFORMANCE OF NFXP AND MPEC IN THE MONTE CARLO EXPERIMENTS^a

β	Implementation	Runs Converged (out of 1250 runs)	CPU Time (in sec.)	# of Major Iter.	# of Func. Eval.	# of Contraction Mapping Iter.
0.975	MPEC/AMPL	1240	0.13	12.8	17.6	–
	MPEC/MATLAB	1247	7.90	53.0	62.0	–
	NFXP	998	24.60	55.9	189.4	134,748
0.980	MPEC/AMPL	1236	0.15	14.5	21.8	–
	MPEC/MATLAB	1241	8.10	57.4	70.6	–
	NFXP	1000	27.90	55.0	183.8	162,505
0.985	MPEC/AMPL	1235	0.13	13.2	19.7	–
	MPEC/MATLAB	1250	7.50	55.0	62.3	–
	NFXP	952	43.20	61.7	227.3	265,827
0.990	MPEC/AMPL	1161	0.19	18.3	42.2	–
	MPEC/MATLAB	1248	7.50	56.5	65.8	–
	NFXP	935	70.10	66.9	253.8	452,347
0.995	MPEC/AMPL	965	0.14	13.4	21.3	–
	MPEC/MATLAB	1246	7.90	59.6	70.7	–
	NFXP	950	111.60	58.8	214.7	748,487

^aFor each β , we use five starting points for each of the 250 replications. CPU time, number of major iterations, number of function evaluations and number of contraction mapping iterations are the averages for each run.

CPR for NFXP

- Step 1: Read NFXP manual and print out NFXP pocket guide
- Step 2: Recenter logit and logsum formulas
- Step 3: Use Fixed Point Poly-Algorithm (SA+NK)
- Step 4: Provide analytical gradients of Bellman operator
- Step 5: Provide analytical gradients of likelihood
- Step 6: Use BHHH (outer product of gradients as hessian approx.)

If NFXP heartbeat is still weak:

Read NFXP pocket guide until help arrives!

CPR for NFXP

- Step 1: Read NFXP manual and print out NFXP pocket guide
- Step 2: Recenter logit and logsum formulas
- Step 3: Use Fixed Point Poly-Algorithm (SA+NK)
- Step 4: Provide analytical gradients of Bellman operator
- Step 5: Provide analytical gradients of likelihood
- Step 6: Use BHHH (outer product of gradients as hessian approx.)

If NFXP heartbeat is still weak:

Read NFXP pocket guide until help arrives!

STEP 1: NFXP documentation

References

-  Rust (1987): "Optimal Replacement of GMC Bus Engines: An Empirical Model of Harold Zurcher" Econometrica 55-5, pp 999-1033.
-  Rust (2000): "Nested Fixed Point Algorithm Documentation Manual: Version 6"
<https://editorialexpress.com/jrust/nfxp.html>
-  Iskhakov, F. , J. Rust, B. Schjerning, L. Jinhyuk, and K. Seo (2015): "Constrained Optimization Approaches to Estimation of Structural Models : Comment." Econometrica 84-1, pp. 365-370.

Nested Fixed Point Algorithm

NFXP Documentation Manual version 6, (Rust 2000, page 18):

Formally, one can view the nested fixed point algorithm as solving the following constrained optimization problem:


$$\max_{\theta, EV} L(\theta, EV) \text{ subject to } EV = \Gamma_{\theta}(EV) \quad (3)$$

Since the contraction mapping Γ always has a unique fixed point, the constraint $EV = \Gamma_{\theta}(EV)$ implies that the fixed point EV_{θ} is an implicit function of θ . Thus, the constrained optimization problem (3) reduces to the unconstrained optimization problem

$$\max_{\theta} L(\theta, EV_{\theta}) \quad (4)$$

where EV_{θ} is the implicit function defined by $EV_{\theta} = \Gamma(EV_{\theta})$.

NFXP pocket guide

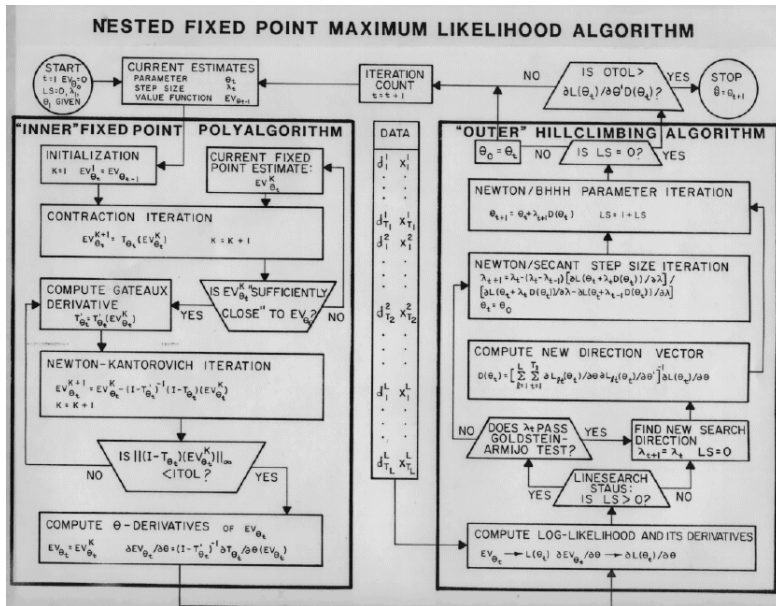

STEP 2: Recenter to ensure numerical stability

Logit formulas must be reentered.

$$P_i = \frac{\exp(v_i)}{\sum_j \exp(v_j)} = \frac{\exp(v_i - v_0)}{\sum_j \exp(v_j - v_0)}$$

and “log-sum” must be recentered too

$$\ln \sum_j \exp(v_j) = v_0 + \ln \sum_j \exp(v_j - v_0)$$

If v_0 is chosen to be $v_0 = \max_j v_j$ we can avoid numerical instability due to overflow/underflow

STEP 3: Use Fixed Point Poly-Algorithm (SA+NK)

Problem: Find fixed point of the contraction mapping, Γ_θ

$$EV_\theta = \Gamma(EV_\theta)$$

Fixed Point Poly-Algorithm:

1. Successive Approximations (SA) by contraction iteration:

$$EV_{k+1} = \Gamma_\theta(EV_k)$$

- ▶ Error bound: $\|EV_{k+1} - EV\| \leq \beta \|EV_k - EV\|$
→ Linear convergence → slow when β close to 1

2. Newton-Kantorovich (NK) iteration:

- ▶ Solve $F = [I - \Gamma](EV_\theta) = 0$ using Newtons method

$$EV_{k+1} = EV_k - (I - \Gamma')^{-1}(I - \Gamma)(EV_k)$$

Γ'_θ is the Fréchet derivative of Γ_θ

I is the identity operator on B

0 is the zero element of B

- ▶ Error bound: $\|EV_{k+1} - EV\| \leq A \|EV_k - EV\|^2$
→ Quadratic convergence around fixed point, EV


Successive Approximations, $\beta = 0.9999$

```
>> run_fxp
iter      tol      tol(j)/tol(j-1)
  1      0.21854635      1.00000000
  2      0.21852208      0.99988895
  3      0.21849729      0.99988654
  :          :          :
49998     0.00142119      0.99990000
49999     0.00142105      0.99990000
50000     0.00142090      0.99990000
Maximum number of iterations exceeded without convergence!
Elapsed time: 1.44489 (seconds)
```


Observations:

- ▶ $tol_k = \|EV_{k+1} - EV_k\| < \beta \|EV_k - EV\|$
- ▶ Tolerance always improves due to contraction property
- ▶ tol_k quickly slow down and declines very slowly for β close to 1
- ▶ Relative tolerance tol_{k+1}/tol_k approach β

Successive Approximations - VERY slow when β close to 1

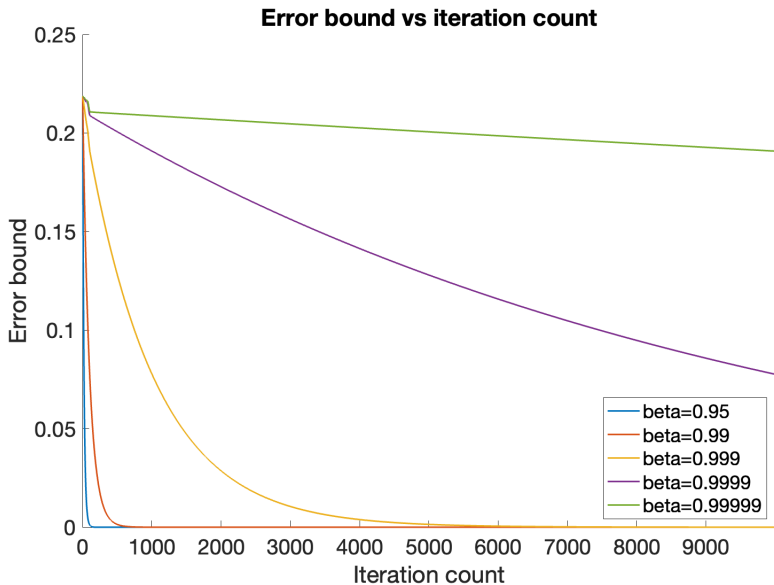

Successive Approximations - linear convergence

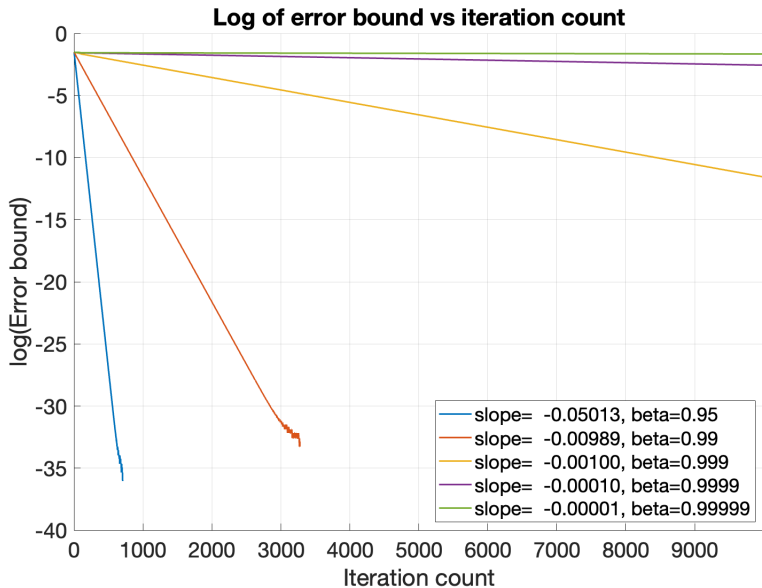

Newton-Kantorovich Iterations, $\beta = 0.9999$

```
>> run_fxp
Begin contraction iterations (for the 1. time)
iter          tol          tol(j)/tol(j-1)
  1          0.21854635          1.00000000
  2          0.21852208          0.99988895
SA stopped prematurely due to rel. tolerance. Begin NK iterations
Elapsed time: 0.00147 (seconds)
```


```
Begin Newton-Kantorovich iterations (for the 1. time)
iter          tol          tol(j)/tol(j-1)
  1          0.01037444          NaN
  2          0.00041127          NaN
  3          0.00000069          NaN
  4          0.00000000          NaN
N-K converged after 4 iterations, tolerance: 2.27374e-12
Elapsed time: 0.00331 (seconds)
```

Convergence achieved!
Total elapsed time: 0.00300 (seconds)

Observations:

- ▶ Quadratic convergence!
- ▶ Very fast, once in domain of attraction

Newton-Kantorovich Iterations - quadratic convergence!

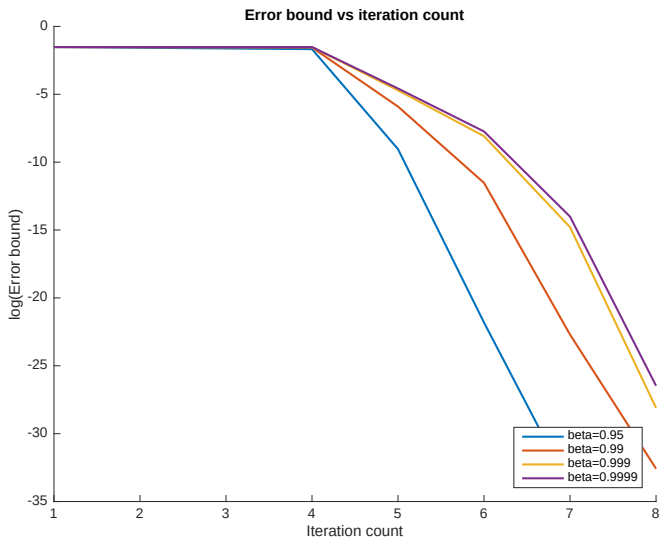

When to switch to Newton-Kantorovich?

When to switch to Newton-Kantorovich?

- ▶ Suppose that $EV_0 = EV + k$.
(Initial EV_0 equals fixed point EV plus an arbitrary constant)
- ▶ Another successive approximation does not solve this:

$$\begin{aligned}tol_0 &= \|EV_0 - \Gamma(EV_0)\| = \|EV + k - \Gamma(EV + k)\| \\ &= \|EV + k - (EV + \beta k)\| = (1 - \beta)k\end{aligned}$$

$$\begin{aligned}tol_1 &= \|EV_1 - \Gamma(EV_1)\| = \|EV + \beta k - \Gamma(EV + \beta k)\| \\ &= \|EV + \beta k - (EV + \beta^2 k)\| = \beta(1 - \beta)k\end{aligned}$$

$$tol_1/tol_0 = \beta$$

- ▶ Newton will immediately “strip away” the irrelevant constant k
- ▶ Switch to Newton whenever tol_1/tol_0 is sufficiently close to β

The Fixed Point (poly) Algorithm

Fixed Point poly Algorithm

1. Successive contraction iterations

$$EV_{k+1} = \Gamma_{\theta}(EV_k)$$

until EV_k is in the domain of attraction
(i.e. when tol_{k+1}/tol_k is close to β)

2. Newton-Kantorovich (quadratic convergence)

$$EV_{k+1} = EV_k - (I - \Gamma')^{-1}(I - \Gamma)(EV_k)$$

until convergence
(i.e. when $\|EV_{k+1} - EV_k\|$ is close to machine precision)

STEP 4: Analytical derivative of Bellman operator

Bellman equation in **integrated value** function space

$$\bar{\Gamma} = \bar{\Gamma}(\bar{V}) = \ln \left[\sum_{d'} \exp[u(d') + \beta \Pi(d') \bar{V}] \right]$$

Derivative of Bellman operator, $\bar{\Gamma}'$

- ▶ Needed for the NK iteration

$$\bar{V}_{k+1} = \bar{V}_k - (I - \bar{\Gamma}')^{-1}(I - \bar{\Gamma})(\bar{V}_k)$$

- ▶ In discretized approximation, $\bar{\Gamma}'$ is a $n \times n$ matrix with partial derivatives of the $n \times 1$ vector function $\bar{\Gamma}(V_\theta)$ with respect to the $n \times 1$ vector $\bar{V}_\theta$
- ▶ $\bar{\Gamma}'_\theta$ is simply β times the choice probability weighted state transition probability matrix

$$\bar{\Gamma}'_\theta = \beta \sum_j \Pi(j) \cdot * P(j)$$

- ▶ One line of code in MATLAB
- ▶ A similar matrix can be derived for Γ'

STEP 1-4: MATLAB implementation of $\bar{\Gamma}_\theta$ and $\bar{\Gamma}'_\theta$

```
function [V1, pk, dBellman_dV]=bellman_iv(V0, mp, u, P)
    vK= u(:,1) + mp.beta*P{1}*V0;      % Value of keeping
    vR= u(:,2) + mp.beta*P{2}*V0;      % Value of replacing

    % Recenter logsum
    maxV=max(vK, vR);
    V1=(maxV + log(exp(vK-maxV) + exp(vR-maxV)));

    % If requested, compute keep probability
    if nargin>1
        pk=1./(1+exp((vR-vK)));
    end

    % If requested, compute derivative of Bellman operator
    if nargin>2
        dBellman_dV=mp.beta*(P{1}.*pk + P{2}.*(1-pk));
    end
end
```

STEP 1-4: MATLAB implementation of Γ_θ and Γ'_θ

```
function [ev, pk, dbellman_dev]=bellman_ev(ev0, mp, u, P)
    vK= u(:,1) + mp.beta*ev0;          % Value off keep
    vR= u(:,2) + mp.beta*ev0(1);      % Value of replacing

    % Need to recenter logsum by subtracting max(vK, vR)
    maxV=max(vK, vR);
    V=(maxV + log(exp(vK-maxV) + exp(vR-maxV)));
    ev=P{1}*V; % compute expected value of keeping
               % ev(1) is the expected value of replacing

    % If requested, also compute choice probability
    if nargin>1
        pk=1./(1+exp((vR-vK)));
    end

    % If requested, compute derivative of Bellman operator
    if nargin>2
        dbellman_dev=mp.beta*(P{1}.*pk');
        % Add additional term for derivative wrt ev(1),
        % since ev(1) enter logsum for all states
        dbellman_dev(:,1)=dbellman_dev(:,1)+mp.beta*P{1}*(1-pk);
    end
end
```

STEP 5: Provide analytical gradients of likelihood

Simple use of chain rule:

3. Gradients (wrt utility parameters) - similar to standard logit

$$\partial \ell_i^1(\theta) / \partial \theta_1 = \sum_t \sum_j [y_{j(it)} - P(j|x_{it}, \theta)] \partial v(x_{it}, j) / \partial \theta_1$$

2. Derivative of the choice specific value function

$$\partial v(j) / \partial \theta_1 = \partial u(j) / \partial \theta_1 + \beta \Pi(j) \partial \bar{V} / \partial \theta_1$$

- ▶ $\partial u(j) / \partial \theta_1$, is trivial to compute
- ▶ $\partial \bar{V}_\theta / \partial \theta$ can be obtained by the implicit function theorem

$$\partial \bar{V}_\theta / \partial \theta = [I - \bar{\Gamma}'_\theta]^{-1} \partial \bar{\Gamma} / \partial \theta$$

where $[I - \bar{\Gamma}'_\theta]^{-1}$ is a **by-product of the N-K algorithm!!!**.

1. Derivative of Bellman operator wrt. θ_1

$$\partial \bar{\Gamma} / \partial \theta_1 = \beta \sum_j P(j) \cdot \partial u(j) / \partial \theta_1$$

where $\cdot$ is the element by element product

STEP 5: MATLAB implementation of scores

```
function score = score(data, mp, P, pk, px_j, V0, du, dBellman_dV);
    y_j=[(1-data.d) data.d]; % choice dummies [keep replace]

    % Compute scores (use chain rule - three steps)

    % STEP 1: derivative of bellman operator wrt. utility parameters
    dbellman=pk.*du(:, :, 1) + (1-pk).*du(:, :, 2);
    if strcmp(mp.bellman_type, 'ev');
        dbellman=P{1}*dbellman;
    end

    % STEP 2: derivative of fixed point, V, wrt. utility parameters
    dV=(speye(size(dBellman_dV)) - dBellman_dV)\dbellman;

    % STEP 3: derivative of log-likelihood wrt. utility parameters
    score=0;
    for j=1:size(y_j, 2);
        dv= du(:, :, j) + mp.beta*P{j}*dV;
        score = score+ (y_j(:, j)-px_j(:, j)).*dv(data.x, :);
    end
end
```

STEP 6: BHHH

- ▶ Recall Newton-Raphson

$$\theta^{g+1} = \theta^g - \lambda (\sum_i H_i(\theta^g))^{-1} \sum_i s_i(\theta^g)$$

- ▶ Berndt, Hall, Hall, and Hausman, (1974):
Use outer product of scores as approx. to Hessian

$$\theta^{g+1} = \theta^g + \lambda (\sum_i s_i s_i')^{-1} \sum_i s_i$$


- ▶ Why is this valid? Information identity:

$$-E[H_i(\theta)] = E[s_i(\theta) s_i(\theta)']$$

(valid for MLE if model is well specified)

STEP 6: BHHH

Some times linesearch may not help Newtons Method

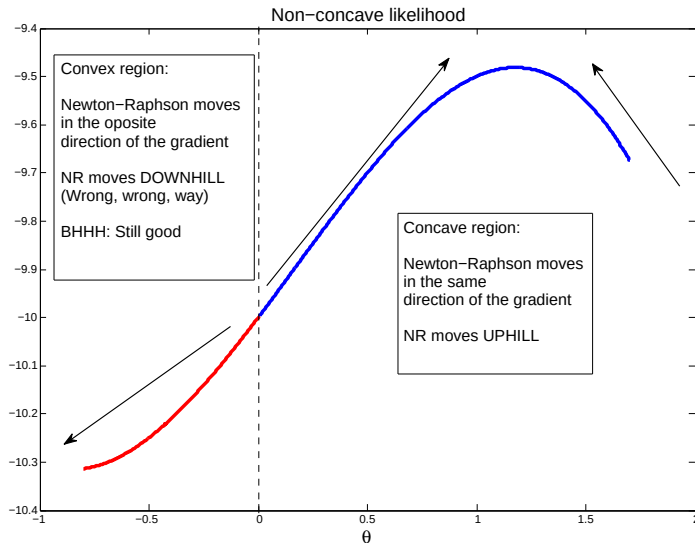

STEP 6: BHHH

Advantages

- ▶ $\Sigma_i s_i s_i'$ is always positive definite
I.e. it always moves uphill for λ small enough
- ▶ Does not rely on second derivatives

Disadvantages

- ▶ Only a good approximation
 - ▶ At the true parameters
 - ▶ for large N
 - ▶ for well specified models (in principle only valid for MLE)
- ▶ Only superlinear convergent - not quadratic

We can always use BHHH for first iterations and the switch to BFGS to update to get an even more accurate approximation to the hessian matrix as the iterations start to converge.

STEP 6: BHHH

Advantages

- ▶ $\sum_i s_i s_i'$ is always positive definite
I.e. it always moves uphill for λ small enough
- ▶ Does not rely on second derivatives

Disadvantages

- ▶ Only a good approximation
 - ▶ At the true parameters
 - ▶ for large N
 - ▶ for well specified models (in principle only valid for MLE)
- ▶ Only superlinear convergent - not quadratic

We can always use BHHH for first iterations and the switch to BFGS to update to get an even more accurate approximation to the hessian matrix as the iterations start to converge.

STEP 6: BHHH



Use BHHH!

Convergence!

```
>> run_busdata
Structural Estimation using busdata from Rust(1987)
Bustypes      = [ 1  2  3  4 ]
Beta          =      0.99990
n             =   175.00000
Sample size   = 8156.00000
```

Method nfxp (mle)

Param.		Estimates	s.e.	t-stat
RC		9.7915	1.2689	7.7168
c		1.3488	0.3460	3.8982
p	(1)	0.1070	0.0034	31.2111
p	(2)	0.5152	0.0055	93.0533
p	(3)	0.3622	0.0053	68.0413
p	(4)	0.0143	0.0013	10.8947
p	(5)	0.0009	0.0003	2.6469

```
log-likelihood = -8607.88844
runtime (seconds) =      0.07882
g'*inv(h)*g     = 7.26689e-09
```


MPEC versus NFXP-NK: sample size 6,000

β	Converged (out of 1250)	CPU Time (in sec.)	# of Major Iter.	# of Func. Eval.	# of Bellm. Iter.	# of N-K Iter.
MPEC-Matlab						
0.975	1247	1.677	60.9	69.9		
0.985	1249	1.648	62.9	70.1		
0.995	1249	1.783	67.4	74.0		
0.999	1249	1.849	72.2	78.4		
0.9995	1250	1.967	74.8	81.5		
0.9999	1248	2.117	79.7	87.5		
MPEC-AMPL						
0.975	1246	0.054	9.3	12.1		
0.985	1217	0.078	16.1	44.1		
0.995	1206	0.080	17.4	49.3		
0.999	1248	0.055	9.9	12.6		
0.9995	1250	0.056	9.9	11.2		
0.9999	1249	0.060	11.1	13.1		
NFXP-NK						
0.975	1250	0.068	11.4	13.9	155.7	51.3
0.985	1250	0.066	10.5	12.9	146.7	50.9
0.995	1250	0.069	9.9	12.6	145.5	55.1
0.999	1250	0.069	9.4	12.5	141.9	57.1
0.9995	1250	0.078	9.4	12.5	142.6	57.5
0.9999	1250	0.070	9.4	12.6	142.4	57.7

MPEC versus NFXP-NK: sample size 60,000


β	Converged (out of 1250)	CPU Time (in sec.)	# of Major Iter.	# of Func. Eval.	# of Bellm. Iter.	# of N-K Iter.
MPEC-AMPL						
0.975	1247	0.53	9.2	11.7		
0.985	1226	0.76	13.9	32.6		
0.995	1219	0.74	14.2	30.7		
0.999	1249	0.56	9.5	11.1		
0.9995	1250	0.59	9.9	11.2		
0.9999	1250	0.63	11.0	12.7		
NFXP-NK						
0.975	1250	0.15	8.2	11.3	113.7	43.7
0.985	1250	0.16	8.4	11.4	124.1	46.2
0.995	1250	0.16	9.4	12.1	133.6	52.7
0.999	1250	0.17	9.5	12.2	133.6	55.2
0.9995	1250	0.17	9.5	12.2	132.3	55.2
0.9999	1250	0.17	9.5	12.2	131.7	55.4

CPU time is linear sample size

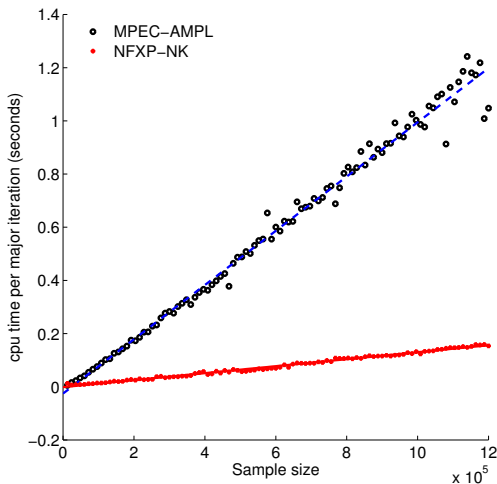

$$T_{NFXP} = 0.001 + 0.13x \quad (R^2 = 0.991), \quad T_{MPEC} = -0.025 + 1.02x \quad (R^2 = 0.988).$$

CPU time is linear sample size

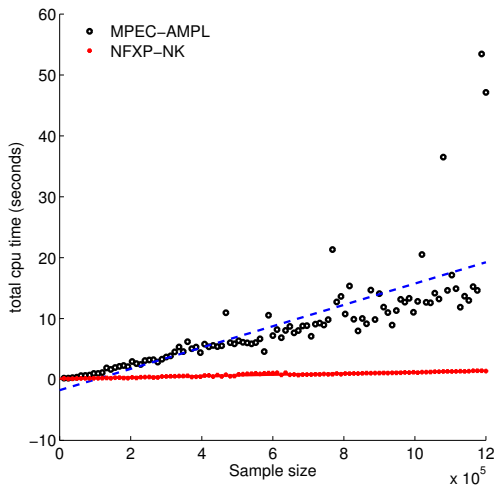

$$T_{NFXP} = 0.129 + 1.07x \quad (R^2 = 0.926), \quad T_{MPEC} = -1.760 + 17.51x \quad (R^2 = 0.554).$$

Summary remarks

Su and Judd (Econometrica, 2012) used an inefficient version of NFXP

- ▶ that solely relies on the method of successive approximations to solve the fixed point problem.

Using the efficient version of NFXP proposed by Rust (1987) we find:

- ▶ MPEC and NFXP-NK are similar in performance when the sample size is relatively small.
- ▶ NFXP does not slow down as $\beta \rightarrow 1$

Desirable features of MPEC

- ▶ Ease of use by people who are not interested in devoting time to the special-purpose programming necessary to implement NFXP-NK.
- ▶ Can easily be implemented in the intuitive AMPL language.

Inference

- ▶ NFXP: Trivial to compute standard errors by inverting the Hessian from the unstrained likelihood (which is a by-product of NFXP).
 - ▶ MPEC: Standard errors can be computed inverting the bordered Hessian
- Reich and Judd (2019): Develop simple and efficient approach to compute confidence intervals.

MPEC does not seem appropriate when estimating life cycle models