

Class 14: Pathway Analysis from RNA-Seq Results

Dea Sinaga (PID: A17725676)

Table of contents

Background	1
Data Import	1
Sanity Check	4
Setup DESeq object	5
Extract the results	6
Run DESeq analysis pipeline	7
Data Viz	8
Add Annotation	9
Pathway analysis	11
Gene Ontology (GO)	23
Reactome Analysis	24
Save our results	25

Background

Pathway analysis (also known as gene set analysis or over-representation analysis), aims to reduce the complexity of interpreting gene lists via mapping the listed genes to known (i.e. annotated) biological pathways, processes and functions.

Data Import

Read counts and metadata CSV files

```
library(DESeq2)
```

Loading required package: S4Vectors

Loading required package: stats4

Loading required package: BiocGenerics

Loading required package: generics

Attaching package: 'generics'

The following objects are masked from 'package:base':

as.difftime, as.factor, as.ordered, intersect, is.element, setdiff,
setequal, union

Attaching package: 'BiocGenerics'

The following objects are masked from 'package:stats':

IQR, mad, sd, var, xtabs

The following objects are masked from 'package:base':

anyDuplicated, aperm, append, as.data.frame, basename, cbind,
colnames, dirname, do.call, duplicated, eval, evalq, Filter, Find,
get, grep, grepl, is.unsorted, lapply, Map, mapply, match, mget,
order, paste, pmax, pmax.int, pmin, pmin.int, Position, rank,
rbind, Reduce, rownames, sapply, saveRDS, table, tapply, unique,
unsplit, which.max, which.min

Attaching package: 'S4Vectors'

The following object is masked from 'package:utils':

findMatches

The following objects are masked from 'package:base':

expand.grid, I, unname

Loading required package: IRanges

Loading required package: GenomicRanges

Loading required package: Seqinfo

Loading required package: SummarizedExperiment

Loading required package: MatrixGenerics

Loading required package: matrixStats

Attaching package: 'MatrixGenerics'

The following objects are masked from 'package:matrixStats':

colAlls, colAnyNAs, colAnys, colAvgPerRowSet, colCollapse,
colCounts, colCummaxs, colCummins, colCumprods, colCumsums,
colDiffs, colIQRDiffs, colIQRs, colLogSumExps, colMadDiffs,
colMads, colMaxs, colMeans2, colMedians, colMins, colOrderStats,
colProds, colQuantiles, colRanges, colRanks, colSdDiffs, colSds,
colSums2, colTabulates, colVarDiffs, colVars, colWeightedMads,
colWeightedMeans, colWeightedMedians, colWeightedSds,
colWeightedVars, rowAlls, rowAnyNAs, rowAnys, rowAvgPerColSet,
rowCollapse, rowCounts, rowCummaxs, rowCummins, rowCumprods,
rowCumsums, rowDiffs, rowIQRDiffs, rowIQRs, rowLogSumExps,
rowMadDiffs, rowMads, rowMaxs, rowMeans2, rowMedians, rowMins,
rowOrderStats, rowProds, rowQuantiles, rowRanges, rowRanks,
rowSdDiffs, rowSds, rowSums2, rowTabulates, rowVarDiffs, rowVars,
rowWeightedMads, rowWeightedMeans, rowWeightedMedians,
rowWeightedSds, rowWeightedVars

Loading required package: Biobase

Welcome to Bioconductor

Vignettes contain introductory material; view with
'browseVignettes()'. To cite Bioconductor, see
'citation("Biobase")', and for packages 'citation("pkgname")'.

Attaching package: 'Biobase'

The following object is masked from 'package:MatrixGenerics':

rowMedians

The following objects are masked from 'package:matrixStats':

anyMissing, rowMedians

```
metaFile <- "GSE37704_metadata.csv"
countFile <- "GSE37704_featurecounts.csv"
```

Sanity Check

```
colData = read.csv(metaFile, row.names=1)
head(colData)
```

```
              condition
SRR493366 control_sirna
SRR493367 control_sirna
SRR493368 control_sirna
SRR493369      hoxa1_kd
SRR493370      hoxa1_kd
SRR493371      hoxa1_kd
```

```
countData = read.csv(countFile, row.names=1)
head(countData)
```

	length	SRR493366	SRR493367	SRR493368	SRR493369	SRR493370
ENSG00000186092	918	0	0	0	0	0
ENSG00000279928	718	0	0	0	0	0
ENSG00000279457	1982	23	28	29	29	28
ENSG00000278566	939	0	0	0	0	0
ENSG00000273547	939	0	0	0	0	0
ENSG00000187634	3214	124	123	205	207	212
		SRR493371				
ENSG00000186092		0				

ENSG00000279928	0
ENSG00000279457	46
ENSG00000278566	0
ENSG00000273547	0
ENSG00000187634	258

Q. Complete the code below to remove the troublesome first column from countData

```
countData <- as.matrix(countData[, -1])
head(countData)
```

	SRR493366	SRR493367	SRR493368	SRR493369	SRR493370	SRR493371
ENSG00000186092	0	0	0	0	0	0
ENSG00000279928	0	0	0	0	0	0
ENSG00000279457	23	28	29	29	28	46
ENSG00000278566	0	0	0	0	0	0
ENSG00000273547	0	0	0	0	0	0
ENSG00000187634	124	123	205	207	212	258

Q. Complete the code below to filter countData to exclude genes (i.e. rows) where we have 0 read count across all samples (i.e. columns).

```
countData <- countData[rowSums(countData) > 0, ]
head(countData)
```

	SRR493366	SRR493367	SRR493368	SRR493369	SRR493370	SRR493371
ENSG00000279457	23	28	29	29	28	46
ENSG00000187634	124	123	205	207	212	258
ENSG00000188976	1637	1831	2383	1226	1326	1504
ENSG00000187961	120	153	180	236	255	357
ENSG00000187583	24	48	65	44	48	64
ENSG00000187642	4	9	16	14	16	16

```
sum(rowSums(countData) == 0)
```

```
[1] 0
```

Setup DESeq object

```
dds = DESeqDataSetFromMatrix(countData= countData,  
                             colData= colData,  
                             design= ~condition)
```

Warning in DESeqDataSet(se, design = design, ignoreRank): some variables in design formula are characters, converting to factors

```
dds = DESeq(dds)
```

estimating size factors

estimating dispersions

gene-wise dispersion estimates

mean-dispersion relationship

final dispersion estimates

fitting model and testing

```
dds
```

```
class: DESeqDataSet  
dim: 15975 6  
metadata(1): version  
assays(4): counts mu H cooks  
rownames(15975): ENSG00000279457 ENSG00000187634 ... ENSG00000276345  
               ENSG00000271254  
rowData names(22): baseMean baseVar ... deviance maxCooks  
colnames(6): SRR493366 SRR493367 ... SRR493370 SRR493371  
colData names(2): condition sizeFactor
```

Extract the results

Big table with log2 fold changes and p-values

```
res = results(dds)
res
```

log2 fold change (MLE): condition hoxa1 kd vs control sirna

Wald test p-value: condition hoxa1 kd vs control sirna

DataFrame with 15975 rows and 6 columns

	baseMean	log2FoldChange	lfcSE	stat	pvalue
	<numeric>	<numeric>	<numeric>	<numeric>	<numeric>
ENSG00000279457	29.9136	0.1792571	0.3248215	0.551863	5.81042e-01
ENSG00000187634	183.2296	0.4264571	0.1402658	3.040350	2.36304e-03
ENSG00000188976	1651.1881	-0.6927205	0.0548465	-12.630156	1.43993e-36
ENSG00000187961	209.6379	0.7297556	0.1318599	5.534326	3.12428e-08
ENSG00000187583	47.2551	0.0405765	0.2718928	0.149237	8.81366e-01
...	...	...	...	...	...
ENSG00000273748	35.30265	0.674387	0.303666	2.220817	2.63633e-02
ENSG00000278817	2.42302	-0.388988	1.130394	-0.344118	7.30758e-01
ENSG00000278384	1.10180	0.332991	1.660261	0.200565	8.41039e-01
ENSG00000276345	73.64496	-0.356181	0.207716	-1.714752	8.63908e-02
ENSG00000271254	181.59590	-0.609667	0.141320	-4.314071	1.60276e-05
	padj				
	<numeric>				
ENSG00000279457	6.86555e-01				
ENSG00000187634	5.15718e-03				
ENSG00000188976	1.76553e-35				
ENSG00000187961	1.13413e-07				
ENSG00000187583	9.19031e-01				
...	...				
ENSG00000273748	4.79091e-02				
ENSG00000278817	8.09772e-01				
ENSG00000278384	8.92654e-01				
ENSG00000276345	1.39761e-01				
ENSG00000271254	4.53647e-05				

Run DESeq analysis pipeline

```
summary(res)
```

out of 15975 with nonzero total read count

```
adjusted p-value < 0.1
LFC > 0 (up)      : 4349, 27%
LFC < 0 (down)    : 4396, 28%
outliers [1]      : 0, 0%
low counts [2]    : 1237, 7.7%
(mean count < 0)
[1] see 'cooksCutoff' argument of ?results
[2] see 'independentFiltering' argument of ?results
```


Data Viz

Volcano Plot

```
library(ggplot2)

ggplot(res) +
  aes(log2FoldChange, -log(padj)) +
  geom_point()
```

Warning: Removed 1237 rows containing missing values or values outside the scale range (`geom\_point()`).

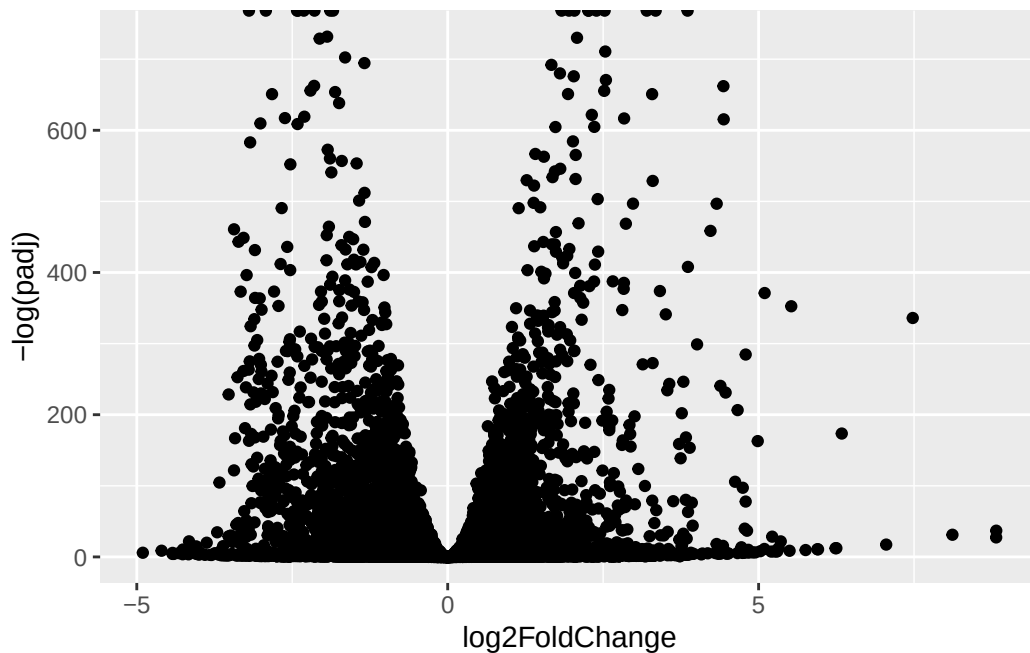


Q. Improve this plot by completing the below code, which adds color, axis labels and cutoff lines:

```
mycols <- rep("gray", nrow(res))
mycols[ abs(res$log2FoldChange) > 2 ] <- "blue"
mycols[ res$padj > 0.01 ] <- "gray"

ggplot(res) +
  aes(res$log2FoldChange, -log(res$padj)) +
  geom_point(color=mycols) +
  xlab("Log2(FoldChange)") +
  ylab("-Log(P-value)") +
  geom_vline(xintercept = c(-2,2)) +
  geom_hline(yintercept = 0)
```

Warning: Removed 1237 rows containing missing values or values outside the scale range (`geom\_point()`).

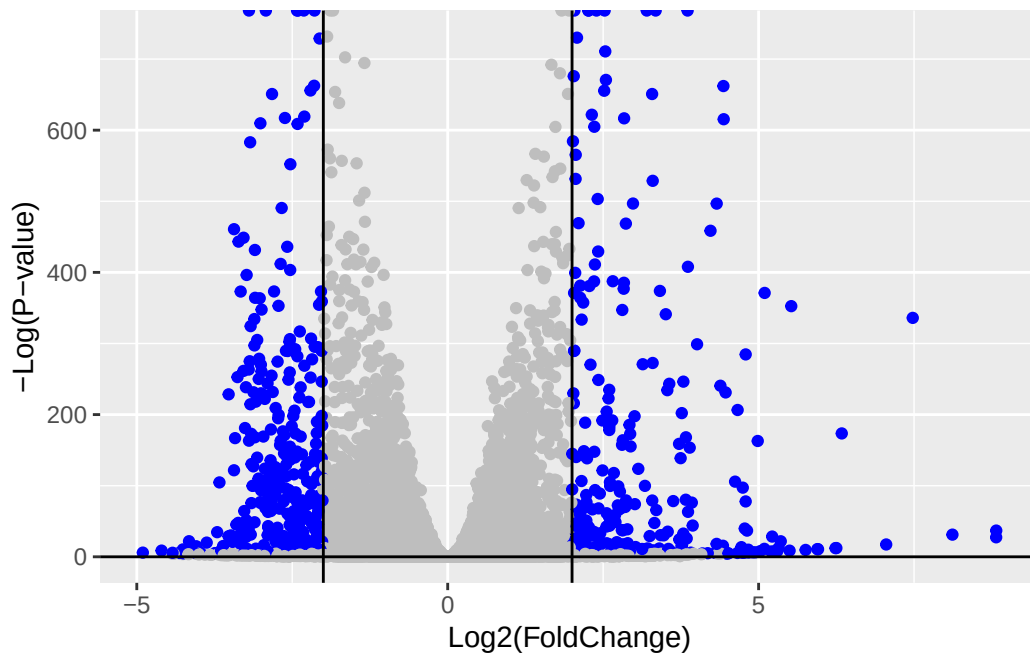

Add Annotation

Use the `mapIDs()` function multiple times to add SYMBOL, ENTREZID and GENENAME annotation to our results by completing the code below.

```
library("AnnotationDbi")
library("org.Hs.eg.db")
```

```
columns(org.Hs.eg.db)
```

```
[1] "ACCNUM"      "ALIAS"        "ENSEMBL"      "ENSEMBLPROT"  "ENSEMBLTRANS"
[6] "ENTREZID"    "ENZYME"       "EVIDENCE"     "EVIDENCEALL"  "GENENAME"
[11] "GENETYPE"    "GO"           "GOALL"        "IPI"           "MAP"
[16] "OMIM"        "ONTOLOGY"     "ONTOLOGYALL"  "PATH"          "PFAM"
[21] "PMID"        "PROSITE"      "REFSEQ"       "SYMBOL"        "UCSCCKG"
[26] "UNIPROT"
```

```
res$symbol = mapIds(org.Hs.eg.db,
                     keys=row.names(res),
                     keytype="ENSEMBL",
                     column="SYMBOL",
                     multiVals="first")
```

'select()' returned 1:many mapping between keys and columns

```
res$entrez = mapIds(org.Hs.eg.db,
                     keys=row.names(res),
                     keytype="ENSEMBL",
                     column="ENTREZID",
                     multiVals="first")
```

'select()' returned 1:many mapping between keys and columns

```
res$name = mapIds(org.Hs.eg.db,
                   keys=row.names(res),
                   keytype="ENSEMBL",
                   column="GENENAME",
                   multiVals="first")
```

'select()' returned 1:many mapping between keys and columns

```
head(res, 10)
```

log2 fold change (MLE): condition hoxa1 kd vs control sirna

Wald test p-value: condition hoxa1 kd vs control sirna

DataFrame with 10 rows and 9 columns

	baseMean	log2FoldChange	lfcSE	stat	pvalue
	<numeric>	<numeric>	<numeric>	<numeric>	<numeric>
ENSG00000279457	29.913579	0.1792571	0.3248215	0.551863	5.81042e-01
ENSG00000187634	183.229650	0.4264571	0.1402658	3.040350	2.36304e-03
ENSG00000188976	1651.188076	-0.6927205	0.0548465	-12.630156	1.43993e-36
ENSG00000187961	209.637938	0.7297556	0.1318599	5.534326	3.12428e-08
ENSG00000187583	47.255123	0.0405765	0.2718928	0.149237	8.81366e-01
ENSG00000187642	11.979750	0.5428105	0.5215598	1.040744	2.97994e-01
ENSG00000188290	108.922128	2.0570638	0.1969053	10.446970	1.51281e-25
ENSG00000187608	350.716868	0.2573837	0.1027266	2.505522	1.22271e-02
ENSG00000188157	9128.439422	0.3899088	0.0467164	8.346302	7.04333e-17
ENSG00000237330	0.158192	0.7859552	4.0804729	0.192614	8.47261e-01
	padj	symbol	entrez	name	
	<numeric>	<character>	<character>	<character>	
ENSG00000279457	6.86555e-01	NA	NA	NA	
ENSG00000187634	5.15718e-03	SAMD11	148398	sterile alpha motif ..	
ENSG00000188976	1.76553e-35	NOC2L	26155	NOC2 like nucleolar ..	
ENSG00000187961	1.13413e-07	KLHL17	339451	kelch like family me..	
ENSG00000187583	9.19031e-01	PLEKHN1	84069	pleckstrin homology ..	
ENSG00000187642	4.03379e-01	PERM1	84808	PPARGC1 and ESRR ind..	
ENSG00000188290	1.30538e-24	HES4	57801	hes family bHLH tran..	
ENSG00000187608	2.37452e-02	ISG15	9636	ISG15 ubiquitin like..	
ENSG00000188157	4.21970e-16	AGRN	375790	agrin	
ENSG00000237330	NA	RNF223	401934	ring finger protein ..	

Q. Finally for this section let's reorder these results by adjusted p-value and save them to a CSV file in your current project directory.

```
res = res[order(res$pvalue),]
write.csv(res, file="deseq_results.csv")
```

Pathway analysis

KEGG, GO, and REACTOME

```
library(pathview)
```

```
#####  
Pathview is an open source software package distributed under GNU General  
Public License version 3 (GPLv3). Details of GPLv3 is available at  
http://www.gnu.org/licenses/gpl-3.0.html. Particullary, users are required to  
formally cite the original Pathview paper (not just mention it) in publications  
or products. For details, do citation("pathview") within R.
```

```
The pathview downloads and uses KEGG data. Non-academic uses may require a KEGG  
license agreement (details at http://www.kegg.jp/kegg/legal.html).  
#####
```

```
library(gage)
```

```
library(gageData)  
  
data(kegg.sets.hs)  
data(sigmet.idx.hs)  
  
kegg.sets.hs = kegg.sets.hs[sigmet.idx.hs]  
  
head(kegg.sets.hs, 3)
```

```
$`hsa00232 Caffeine metabolism`  
[1] "10" "1544" "1548" "1549" "1553" "7498" "9"
```

```
$`hsa00983 Drug metabolism - other enzymes`  
[1] "10" "1066" "10720" "10941" "151531" "1548" "1549" "1551"  
[9] "1553" "1576" "1577" "1806" "1807" "1890" "221223" "2990"  
[17] "3251" "3614" "3615" "3704" "51733" "54490" "54575" "54576"  
[25] "54577" "54578" "54579" "54600" "54657" "54658" "54659" "54963"  
[33] "574537" "64816" "7083" "7084" "7172" "7363" "7364" "7365"  
[41] "7366" "7367" "7371" "7372" "7378" "7498" "79799" "83549"  
[49] "8824" "8833" "9" "978"
```

```
$`hsa00230 Purine metabolism`  
[1] "100" "10201" "10606" "10621" "10622" "10623" "107" "10714"
```

```

[9] "108"      "10846"    "109"      "111"      "11128"    "11164"    "112"      "113"
[17] "114"      "115"      "122481"   "122622"   "124583"   "132"      "158"      "159"
[25] "1633"     "171568"   "1716"     "196883"   "203"      "204"      "205"      "221823"
[33] "2272"     "22978"    "23649"    "246721"   "25885"    "2618"     "26289"    "270"
[41] "271"      "27115"    "272"      "2766"     "2977"     "2982"     "2983"     "2984"
[49] "2986"     "2987"     "29922"    "3000"     "30833"    "30834"    "318"      "3251"
[57] "353"      "3614"     "3615"     "3704"     "377841"   "471"      "4830"     "4831"
[65] "4832"     "4833"     "4860"     "4881"     "4882"     "4907"     "50484"    "50940"
[73] "51082"    "51251"    "51292"    "5136"     "5137"     "5138"     "5139"     "5140"
[81] "5141"     "5142"     "5143"     "5144"     "5145"     "5146"     "5147"     "5148"
[89] "5149"     "5150"     "5151"     "5152"     "5153"     "5158"     "5167"     "5169"
[97] "51728"    "5198"     "5236"     "5313"     "5315"     "53343"    "54107"    "5422"
[105] "5424"     "5425"     "5426"     "5427"     "5430"     "5431"     "5432"     "5433"
[113] "5434"     "5435"     "5436"     "5437"     "5438"     "5439"     "5440"     "5441"
[121] "5471"     "548644"   "55276"    "5557"     "5558"     "55703"    "55811"    "55821"
[129] "5631"     "5634"     "56655"    "56953"    "56985"    "57804"    "58497"    "6240"
[137] "6241"     "64425"    "646625"   "654364"   "661"      "7498"     "8382"     "84172"
[145] "84265"    "84284"    "84618"    "8622"     "8654"     "87178"    "8833"     "9060"
[153] "9061"     "93034"    "953"      "9533"     "954"      "955"      "956"      "957"
[161] "9583"     "9615"

```

```

foldchanges = res$log2FoldChange
names(foldchanges) = res$entrez
head(foldchanges)

```

```

      1266      54855      1465      2034      2150      6659
-2.422719  3.201955 -2.313738 -1.888019  3.344508  2.392288

```

```

keggres = gage(foldchanges, gsets=kegg.sets.hs)

```

```

attributes(keggres)

```

```

$names
[1] "greater" "less"     "stats"

```

```

head(keggres$less)

```

```

      p.geomean stat.mean      p.val
hsa04110 Cell cycle      8.995727e-06 -4.378644 8.995727e-06
hsa03030 DNA replication  9.424076e-05 -3.951803 9.424076e-05

```

hsa03013	RNA transport	1.375901e-03	-3.028500	1.375901e-03
hsa03440	Homologous recombination	3.066756e-03	-2.852899	3.066756e-03
hsa04114	Oocyte meiosis	3.784520e-03	-2.698128	3.784520e-03
hsa00010	Glycolysis / Gluconeogenesis	8.961413e-03	-2.405398	8.961413e-03
		q.val	set.size	exp1
hsa04110	Cell cycle	0.001448312	121	8.995727e-06
hsa03030	DNA replication	0.007586381	36	9.424076e-05
hsa03013	RNA transport	0.073840037	144	1.375901e-03
hsa03440	Homologous recombination	0.121861535	28	3.066756e-03
hsa04114	Oocyte meiosis	0.121861535	102	3.784520e-03
hsa00010	Glycolysis / Gluconeogenesis	0.212222694	53	8.961413e-03


```
pathview(gene.data=foldchanges, pathway.id="hsa04110")
```

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/deasinaga/Desktop/BIMM 143/class14

Info: Writing image file hsa04110.pathview.png

```
knitr::include_graphics("hsa04110.pathview.png")
```

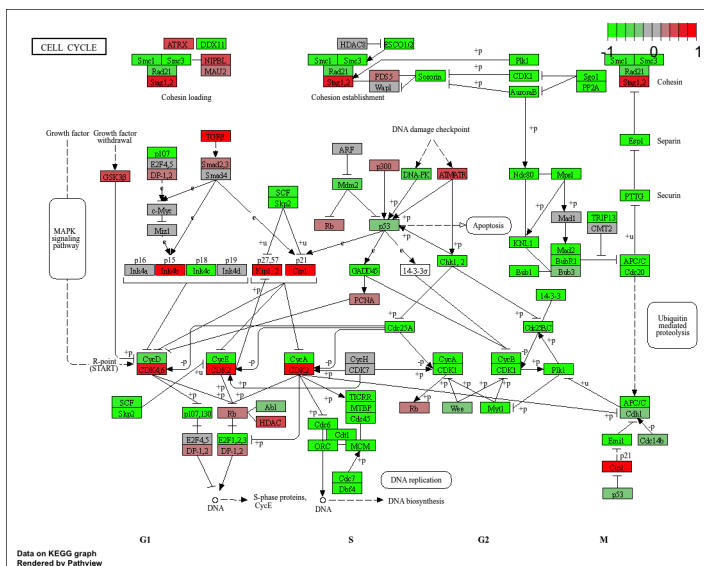

Now, let's process our results a bit more to automatically pull out the top 5 upregulated pathways, then further process that just to get the pathway IDs needed by the pathview() function. We'll use these KEGG pathway IDs for pathview plotting below.

```
keggrespathways <- rownames(keggres$greater)[1:5]
keggresids = substr(keggrespathways, start=1, stop=8)
keggresids
```

```
[1] "hsa04640" "hsa04630" "hsa00140" "hsa04142" "hsa04330"
```

Finally, lets pass these IDs in keggresids to the pathview() function to draw plots for all the top 5 pathways.

```
pathview(gene.data=foldchanges, pathway.id=keggresids, species="hsa")
```

```
'select()' returned 1:1 mapping between keys and columns
```

```
Info: Working in directory /Users/deasinaga/Desktop/BIMM 143/class14
```

```
Info: Writing image file hsa04640.pathview.png
```

```
'select()' returned 1:1 mapping between keys and columns
```

```
Info: Working in directory /Users/deasinaga/Desktop/BIMM 143/class14
```

```
Info: Writing image file hsa04630.pathview.png
```

```
'select()' returned 1:1 mapping between keys and columns
```

```
Info: Working in directory /Users/deasinaga/Desktop/BIMM 143/class14
```

```
Info: Writing image file hsa00140.pathview.png
```

```
'select()' returned 1:1 mapping between keys and columns
```

```
Info: Working in directory /Users/deasinaga/Desktop/BIMM 143/class14
```


```
Info: Writing image file hsa04142.pathview.png
```


```
'select()' returned 1:1 mapping between keys and columns
```

```
Info: Working in directory /Users/deasinaga/Desktop/BIMM 143/class14
```

```
Info: Writing image file hsa04330.pathview.png
```

```
files <- paste0(keggresids, ".pathview.png")
knitr::include_graphics(files)
```

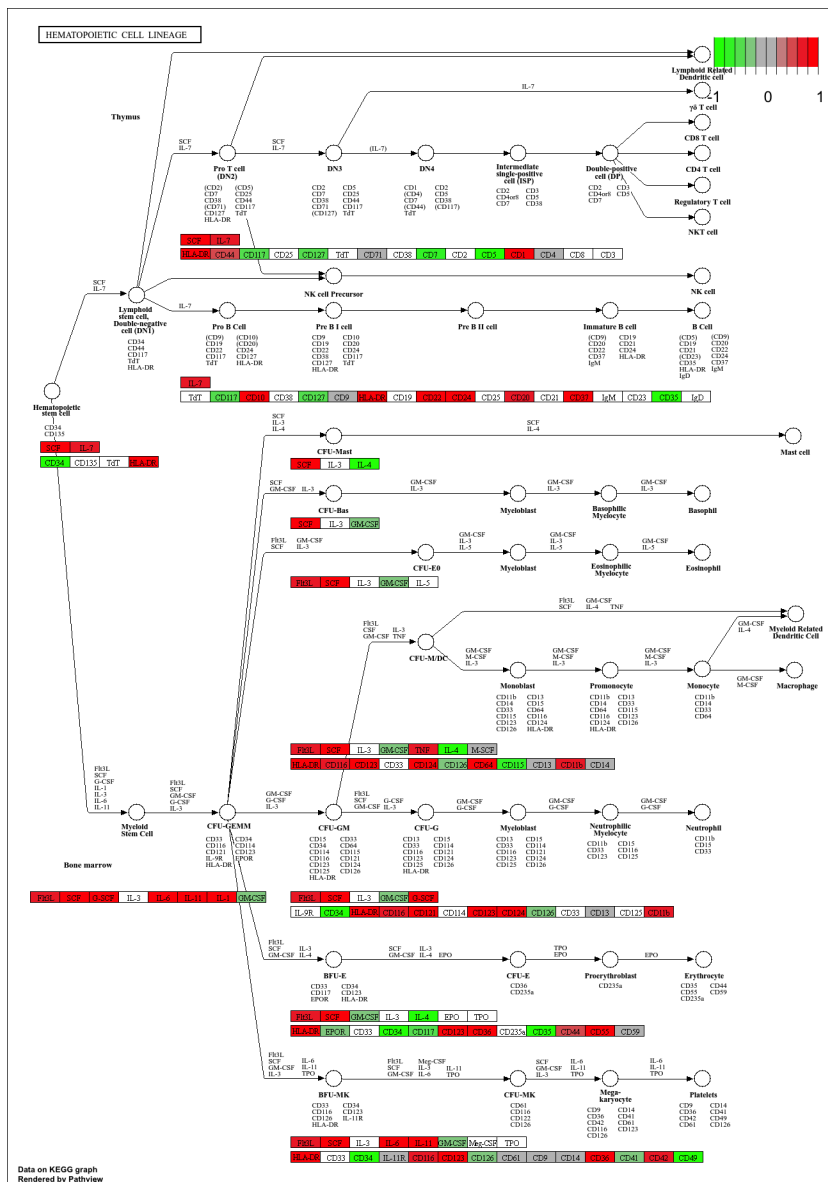




```
downpathways <- rownames(keggres$less)[1:5]
downids <- substr(downpathways, start = 1, stop = 8)
pathview(gene.data = foldchanges, pathway.id = downids, species = "hsa")
```

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/deasinaga/Desktop/BIMM 143/class14

Info: Writing image file hsa04110.pathview.png

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/deasinaga/Desktop/BIMM 143/class14

Info: Writing image file hsa03030.pathview.png

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/deasinaga/Desktop/BIMM 143/class14

Info: Writing image file hsa03013.pathview.png

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/deasinaga/Desktop/BIMM 143/class14



Info: Writing image file hsa03440.pathview.png


'select()' returned 1:1 mapping between keys and columns


Info: Working in directory /Users/deasinaga/Desktop/BIMM 143/class14

Info: Writing image file hsa04114.pathview.png

```
knitr::include_graphics(paste0(downids, ".pathview.png"))
```

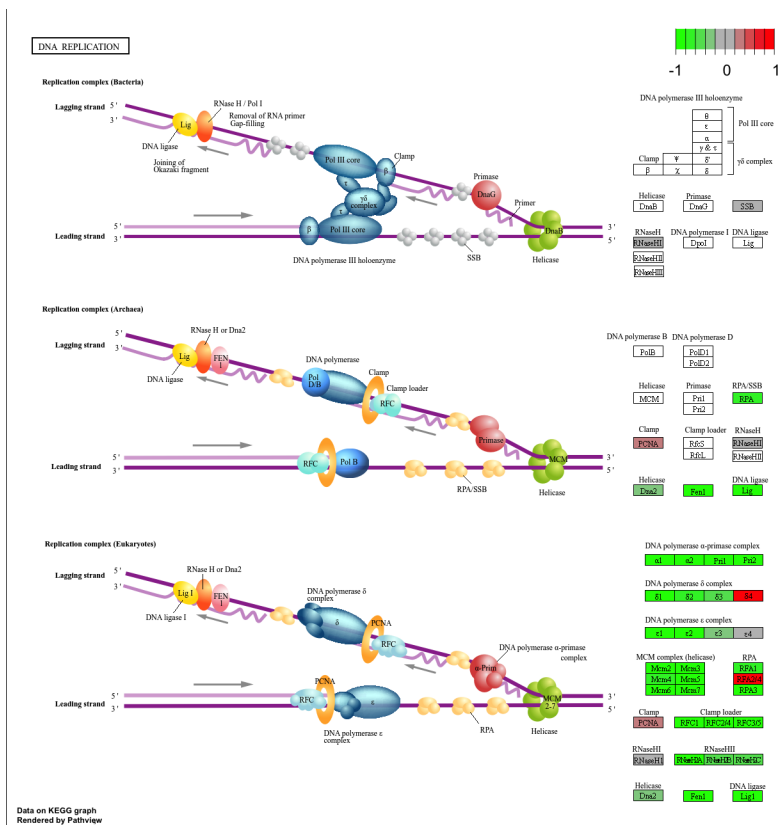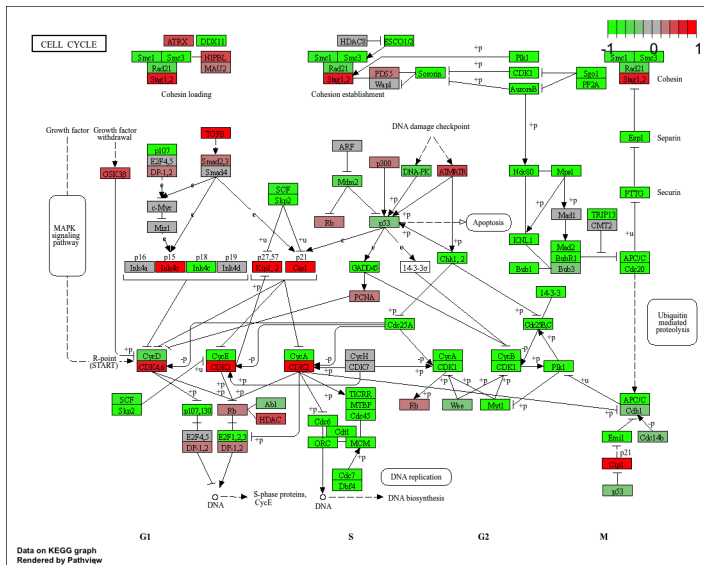

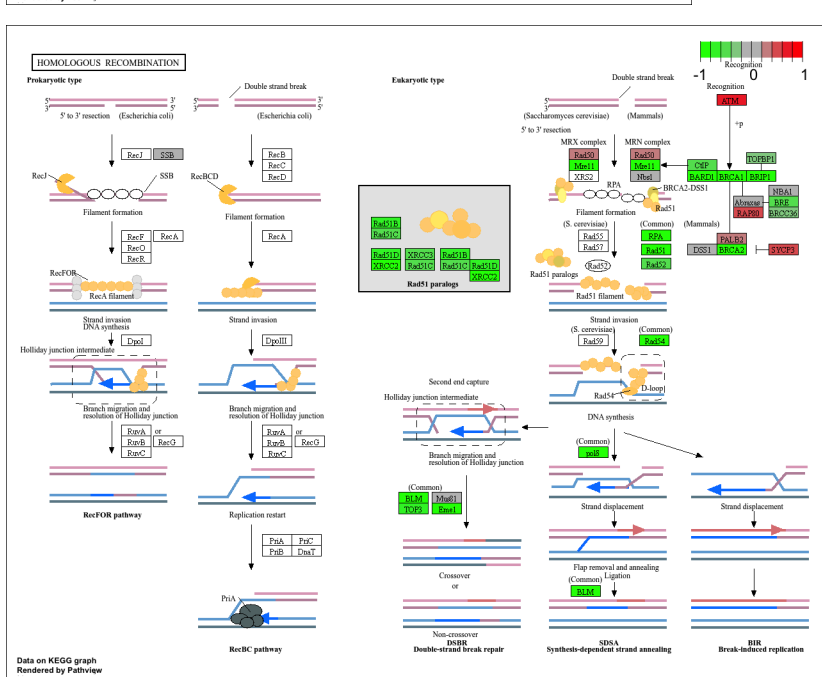

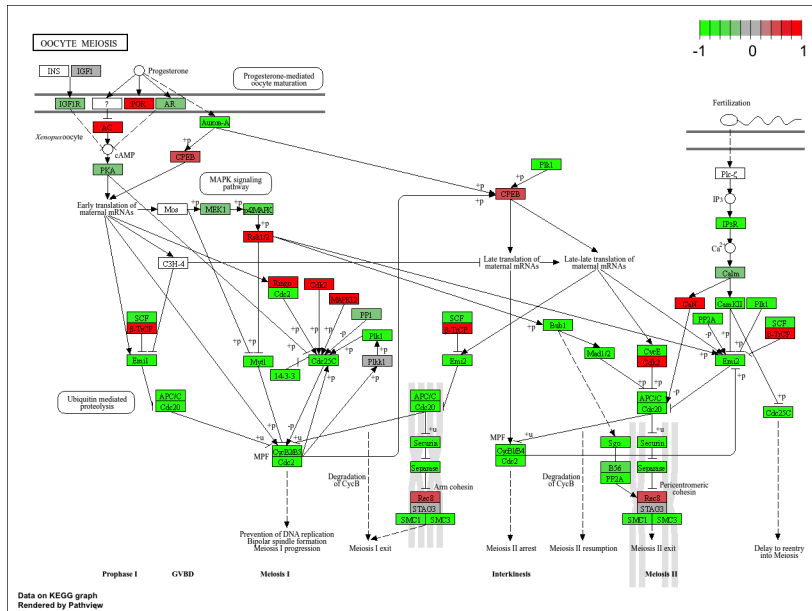

Gene Ontology (GO)

We can also do a similar procedure with gene ontology. Similar to above, `go.sets.hs` has all GO terms. `go.subs.hs` is a named list containing indexes for the BP, CC, and MF ontologies. Let's focus on BP (a.k.a Biological Process) here.

```
data(go.sets.hs)
data(go.subs.hs)

gobpsets = go.sets.hs[go.subs.hs$BP]

gobpres = gage(foldchanges, gsets=gobpsets)

lapply(gobpres, head)
```

```
$greater
```

	p.geomean	stat.mean	p.val
G0:0007156 homophilic cell adhesion	8.519724e-05	3.824205	8.519724e-05
G0:0002009 morphogenesis of an epithelium	1.396681e-04	3.653886	1.396681e-04
G0:0048729 tissue morphogenesis	1.432451e-04	3.643242	1.432451e-04
G0:0007610 behavior	1.925222e-04	3.565432	1.925222e-04
G0:0060562 epithelial tube morphogenesis	5.932837e-04	3.261376	5.932837e-04
G0:0035295 tube development	5.953254e-04	3.253665	5.953254e-04

	q.val	set.size	exp1
G0:0007156 homophilic cell adhesion	0.1951953	113	8.519724e-05
G0:0002009 morphogenesis of an epithelium	0.1951953	339	1.396681e-04
G0:0048729 tissue morphogenesis	0.1951953	424	1.432451e-04
G0:0007610 behavior	0.1967577	426	1.925222e-04
G0:0060562 epithelial tube morphogenesis	0.3565320	257	5.932837e-04
G0:0035295 tube development	0.3565320	391	5.953254e-04

\$less

	p.geomean	stat.mean	p.val
G0:0048285 organelle fission	1.536227e-15	-8.063910	1.536227e-15
G0:0000280 nuclear division	4.286961e-15	-7.939217	4.286961e-15
G0:0007067 mitosis	4.286961e-15	-7.939217	4.286961e-15
G0:0000087 M phase of mitotic cell cycle	1.169934e-14	-7.797496	1.169934e-14
G0:0007059 chromosome segregation	2.028624e-11	-6.878340	2.028624e-11
G0:0000236 mitotic prometaphase	1.729553e-10	-6.695966	1.729553e-10

	q.val	set.size	exp1
G0:0048285 organelle fission	5.841698e-12	376	1.536227e-15
G0:0000280 nuclear division	5.841698e-12	352	4.286961e-15
G0:0007067 mitosis	5.841698e-12	352	4.286961e-15
G0:0000087 M phase of mitotic cell cycle	1.195672e-11	362	1.169934e-14
G0:0007059 chromosome segregation	1.658603e-08	142	2.028624e-11
G0:0000236 mitotic prometaphase	1.178402e-07	84	1.729553e-10

\$stats

	stat.mean	exp1
G0:0007156 homophilic cell adhesion	3.824205	3.824205
G0:0002009 morphogenesis of an epithelium	3.653886	3.653886
G0:0048729 tissue morphogenesis	3.643242	3.643242
G0:0007610 behavior	3.565432	3.565432
G0:0060562 epithelial tube morphogenesis	3.261376	3.261376
G0:0035295 tube development	3.253665	3.253665

Reactome Analysis

Reactome is database consisting of biological molecules and their relation to pathways and processes. Reactome, such as many other tools, has an online software available (<https://reactome.org/>) and R package available (<https://bioconductor.org/packages/release/bioc/html/ReactomePA.html>).

```
sig_genes <- res[res$padj <= 0.05 & !is.na(res$padj), "symbol"]
print(paste("Total number of significant genes:", length(sig_genes)))
```

```
[1] "Total number of significant genes: 8147"
```

```
write.table(sig_genes, file="significant_genes.txt", row.names=FALSE, col.names=FALSE, quote=
```

Q. What pathway has the most significant “Entities p-value”? Do the most significant pathways listed match your previous KEGG results? What factors could cause differences between the two methods?

The Cell Cycle has the most significant “Entities p-value”. It matches my previous KEGG results. There might be differences between the two methods due to different data bases and statistical methods.

Save our results

```
write.csv(res, file="myresults_annotated.csv")
```