

April 14, 2024


Vulnerability Scan Report

prepared by

HostedScan Security



hostedscan.com

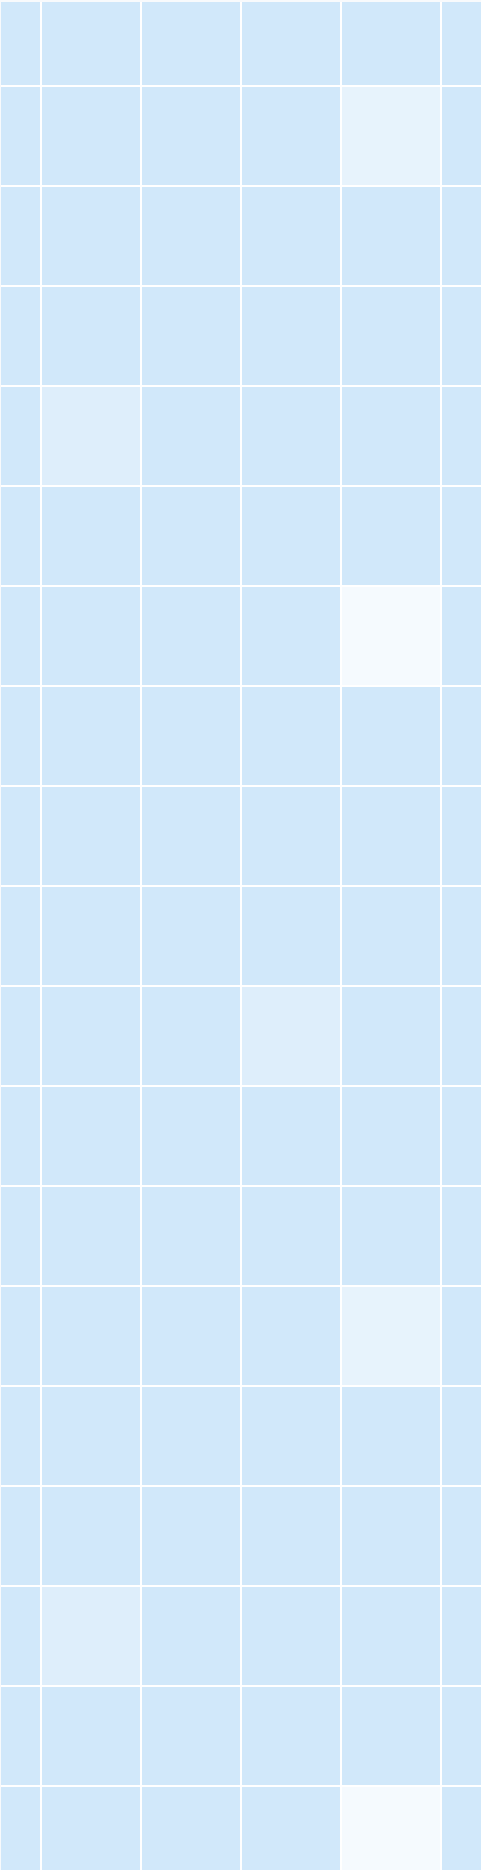

Overview

1	Executive Summary	3
2	Risks By Target	4
3	Open TCP Ports	6
4	Glossary	15



1 Executive Summary

Vulnerability scans were conducted on selected servers, networks, websites, and applications. This report contains the discovered potential risks from these scans. Risks have been classified into categories according to the level of threat and degree of potential harm they may pose.

1.1 Total Risks

Below is the total number of risks found by severity. High risks are the most severe and should be evaluated first. An accepted risk is one which has been manually reviewed and classified as acceptable to not fix at this time, such as a false positive or an intentional part of the system's architecture.



1.2 Report Coverage

This report includes findings for 1 target that were scanned. Each target is a single URL, IP address, or fully qualified domain name (FQDN).

Vulnerability Categories

8




Open TCP Ports

2 Risks By Target

This section contains the vulnerability findings for each target that was scanned. Prioritize the most vulnerable assets first.

2.1 Targets Summary

The total number of risks found for each target, by severity.


Target	 Critical	 High	 Medium	 Low	 Accepted
 https://theboxco.great-site.net/?i=1	0	0	6	2	0

2.2 Target Breakdowns

The risks discovered for each target.

Target
<https://theboxco.great-site.net/?i=1>

Total Risks

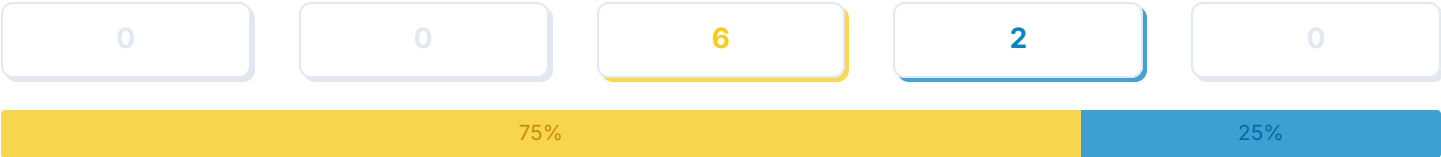


Open TCP Ports	Threat Level	First Detected	Last Detected
Open TCP Port: 111	● Medium	0 days ago	0 days ago
Open TCP Port: 2049	● Medium	0 days ago	0 days ago
Open TCP Port: 27015	● Medium	0 days ago	0 days ago
Open TCP Port: 20048	● Medium	0 days ago	0 days ago
Open TCP Port: 49473	● Medium	0 days ago	0 days ago
Open TCP Port: 17405	● Medium	0 days ago	0 days ago
Open TCP Port: 443	● Low	0 days ago	0 days ago
Open TCP Port: 80	● Low	0 days ago	0 days ago

3 Open TCP Ports

The NMAP TCP port scan discovers open TCP ports with a complete scan of ports 0 to 65535.

3.1 Total Risks

Total number of risks found by severity.

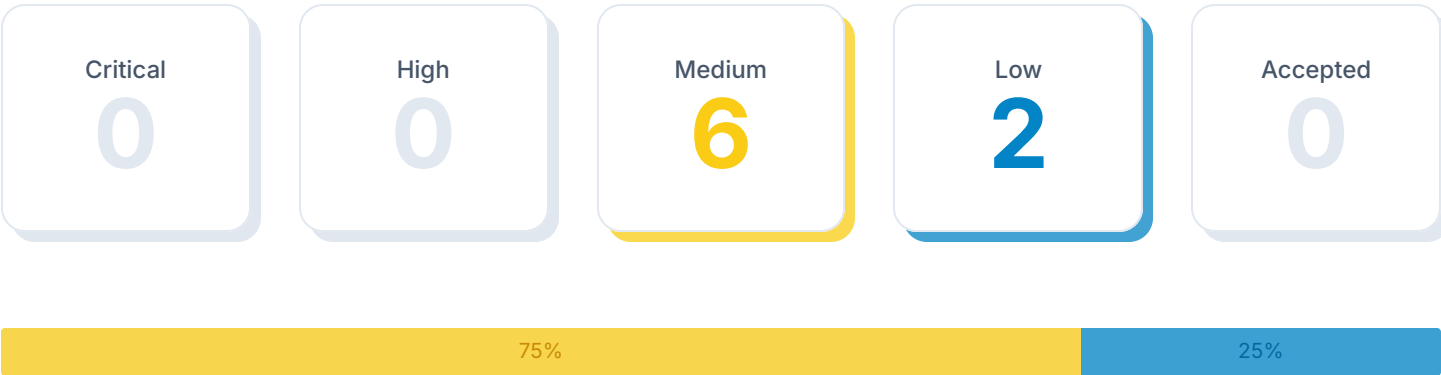

3.2 Risks Breakdown

Summary list of all detected risks.

Title	Threat Level	Open	Accepted
Open TCP Port: 111	● Medium	1	0
Open TCP Port: 2049	● Medium	1	0
Open TCP Port: 27015	● Medium	1	0
Open TCP Port: 20048	● Medium	1	0
Open TCP Port: 49473	● Medium	1	0
Open TCP Port: 17405	● Medium	1	0
Open TCP Port: 443	● Low	1	0
Open TCP Port: 80	● Low	1	0

3.3 Full Risk Details

Detailed information about each risk found by the scan.

Open TCP Port: 111

Medium

Description

An open port may be an expected configuration. For example, web servers use port 80 to serve websites over http and port 443 to serve websites over https. For a list of commonly used ports see https://en.wikipedia.org/wiki/List_of_TCP_and_UDP_port_numbers.

An unexpected open port could give unintended access to applications, data, and private networks. Open ports can also be dangerous when expected services are out of date and exploited through security vulnerabilities.

Vulnerable Target	First Detected	Last Detected
https://theboxco.great-site.net/?i=1	0 days ago	0 days ago

Open TCP Port: 2049

● Medium

Description

An open port may be an expected configuration. For example, web servers use port 80 to serve websites over http and port 443 to serve websites over https. For a list of commonly used ports see https://en.wikipedia.org/wiki/List_of_TCP_and_UDP_port_numbers.

An unexpected open port could give unintended access to applications, data, and private networks. Open ports can also be dangerous when expected services are out of date and exploited through security vulnerabilities.

Vulnerable Target	First Detected	Last Detected
https://theboxco.great-site.net/?i=1	0 days ago	0 days ago

Open TCP Port: 27015

● Medium

Description

An open port may be an expected configuration. For example, web servers use port 80 to serve websites over http and port 443 to serve websites over https. For a list of commonly used ports see https://en.wikipedia.org/wiki/List_of_TCP_and_UDP_port_numbers.
An unexpected open port could give unintended access to applications, data, and private networks. Open ports can also be dangerous when expected services are out of date and exploited through security vulnerabilities.

Vulnerable Target	First Detected	Last Detected
https://theboxco.great-site.net/?i=1	0 days ago	0 days ago

Open TCP Port: 20048

● Medium

Description

An open port may be an expected configuration. For example, web servers use port 80 to serve websites over http and port 443 to serve websites over https. For a list of commonly used ports see https://en.wikipedia.org/wiki/List_of_TCP_and_UDP_port_numbers.
An unexpected open port could give unintended access to applications, data, and private networks. Open ports can also be dangerous when expected services are out of date and exploited through security vulnerabilities.

Vulnerable Target	First Detected	Last Detected
https://theboxco.great-site.net/?i=1	0 days ago	0 days ago

Open TCP Port: 49473

● Medium

Description

An open port may be an expected configuration. For example, web servers use port 80 to serve websites over http and port 443 to serve websites over https. For a list of commonly used ports see https://en.wikipedia.org/wiki/List_of_TCP_and_UDP_port_numbers.

An unexpected open port could give unintended access to applications, data, and private networks. Open ports can also be dangerous when expected services are out of date and exploited through security vulnerabilities.

Vulnerable Target	First Detected	Last Detected
https://theboxco.great-site.net/?i=1	0 days ago	0 days ago

Open TCP Port: 17405

● Medium

Description

An open port may be an expected configuration. For example, web servers use port 80 to serve websites over http and port 443 to serve websites over https. For a list of commonly used ports see https://en.wikipedia.org/wiki/List_of_TCP_and_UDP_port_numbers.
An unexpected open port could give unintended access to applications, data, and private networks. Open ports can also be dangerous when expected services are out of date and exploited through security vulnerabilities.

Vulnerable Target	First Detected	Last Detected
https://theboxco.great-site.net/?i=1	0 days ago	0 days ago

Open TCP Port: 443

● Low

Description

An open port may be an expected configuration. For example, web servers use port 80 to serve websites over http and port 443 to serve websites over https. For a list of commonly used ports see https://en.wikipedia.org/wiki/List_of_TCP_and_UDP_port_numbers.

An unexpected open port could give unintended access to applications, data, and private networks. Open ports can also be dangerous when expected services are out of date and exploited through security vulnerabilities.

Vulnerable Target	First Detected	Last Detected
https://theboxco.great-site.net/?i=1	0 days ago	0 days ago

Open TCP Port: 80

● Low

Description

An open port may be an expected configuration. For example, web servers use port 80 to serve websites over http and port 443 to serve websites over https. For a list of commonly used ports see https://en.wikipedia.org/wiki/List_of_TCP_and_UDP_port_numbers.
An unexpected open port could give unintended access to applications, data, and private networks. Open ports can also be dangerous when expected services are out of date and exploited through security vulnerabilities.

Vulnerable Target	First Detected	Last Detected
https://theboxco.great-site.net/?i=1	0 days ago	0 days ago

4 Glossary

Accepted Risk

An accepted risk is one which has been manually reviewed and classified as acceptable to not fix at this time, such as a false positive or an intentional part of the system's architecture.

Fully Qualified Domain Name (FQDN)

A fully qualified domain name is a complete domain name for a specific website or service on the internet. This includes not only the website or service name, but also the top-level domain name, such as .com, .org, .net, etc. For example, 'www.example.com' is an FQDN.

Open TCP Ports

The NMAP TCP port scan discovers open TCP ports with a complete scan of ports 0 to 65535.

Risk

A risk is a finding from a vulnerability scan. Each risk is a potential security issue that needs review. Risks are assigned a threat level which represents the potential severity.

Target

A target represents target is a single URL, IP address, or fully qualified domain name (FQDN) that was scanned.

Threat Level

The threat level represents the estimated potential severity of a particular risk. Threat level is divided into 4 categories: High, Medium, Low and Accepted.

Threat Level

The threat level represents the estimated potential severity of a particular risk. Threat level is divided into 5 categories: Critical, High, Medium, Low and Accepted.

CVSS Score

The CVSS 3.0 score is a global standard for evaluating vulnerabilities with a 0 to 10 scale. CVSS maps to threat levels: 0.1 - 3.9 = Low, 4.0 - 6.9 = Medium, 7.0 - 8.9 = High, 9.0 - 10.0 = Critical

This report was prepared using

HostedScan Security®

For more information, visit hostedscan.com

Founded in Seattle, Washington in 2019, HostedScan, LLC. is dedicated to making continuous vulnerability scanning and risk management much more easily accessible to more businesses.



HostedScan, LLC.

2212 Queen Anne Ave N
Suite #521
Seattle, WA 98109

Terms & Policies
hello@hostedscan.com