

# Mastering Async/Await

Valeri Karpov

@code\_barbarian

[github.com/vkarpov15](https://github.com/vkarpov15)

# About Me

- Backend Lead @ Booster, Node.js OSS
- Core contributor for Mongoose, Mocha
- Blogger, thecodebarbarian.com
- Early employee at LevelUp, MongoDB, Booster
- Invented the MEAN stack

# Workshop Schedule

- **7:30-7:45** Intro, Return Values
- **7:45-8:15** Exercise 1
- **8:15-8:30** Error Handling
- **8:30-9:00** Exercise 2
- **9:00-9:05** Wrap-up and Takeaways

# What Is Async/Await?

- 2 new keywords
- Async functions return a promise
- Await pauses execution of an async function

Example 1.1

```
async function test() {  
  // This function will print "Hello, World!" after 1 second.  
  await new Promise(resolve => setTimeout(() => resolve(), 1000));  
  console.log('Hello, World!');  
}  
  
test();
```

# Callback Hell

- Error handling
- Readability

```
function getWikipediaHeaders() {  
  // i. check if headers.txt exists  
  fs.stat('./headers.txt', function(err, stats) {  
    if (err != null) { throw err; }  
    if (stats == undefined) {  
      // ii. fetch the HTTP headers  
      var options = { host: 'www.wikipedia.org', port: 80 };  
      http.get(options, function(err, res) {  
        if (err != null) { throw err; }  
        var headers = JSON.stringify(res.headers);  
        // iii. write the headers to headers.txt  
        fs.writeFile('./headers.txt', headers, function(err) {  
          if (err != null) { throw err; }  
          console.log('Great Success!');  
        });  
      });  
    } else { console.log('headers already collected'); }  
  });  
}
```

# Async/Await Makes Async Logic Flat

```
async function getWikipediaHeaders() {  
  if (await stat('./headers.txt') != null) {  
    console.log('headers already collected');  
  }  
  const res = await get({ host: 'www.wikipedia.org', port: 80 });  
  await writeFile('./headers.txt', JSON.stringify(res.headers));  
  console.log('Great success!');  
}
```

```
function getWikipediaHeaders() {  
  // i. check if headers.txt exists  
  fs.stat('./headers.txt', function(err, stats) {  
    if (err != null) { throw err; }  
    if (stats == undefined) {  
      // ii. fetch the HTTP headers  
      var options = { host: 'www.wikipedia.org', port: 80 };  
      http.get(options, function(err, res) {  
        if (err != null) { throw err; }  
        var headers = JSON.stringify(res.headers);  
        // iii. write the headers to headers.txt  
        fs.writeFile('./headers.txt', headers, function(err) {  
          if (err != null) { throw err; }  
          console.log('Great Success!');  
        });  
      });  
    } else { console.log('headers already collected'); }  
  });  
}
```

# Loops, If Statements, Try/Catch Work

Example 1.5

```
async function test() {  
  while (true) {  
    // Convoluted way to print out "Hello, World!" once per second by  
    // pausing execution for 200ms 5 times  
    for (let i = 0; i < 10; ++i) {  
      if (i % 2 === 0) {  
        await new Promise(resolve => setTimeout(() => resolve(), 200));  
      }  
    }  
    console.log('Hello, World!');  
  }  
}
```

# Can Only Await Within An Async Function

Example 1.3

```
function test() {  
  const p = new Promise(resolve => setTimeout(() => resolve(), 1000));  
  // SyntaxError: Unexpected identifier  
  await p;  
}
```

```
const assert = require('assert');  
  
async function test() {  
  const p = Promise.resolve('test');  
  assert.doesNotThrow(function() {  
    // "SyntaxError: Unexpected identifier" because the above function  
    // is not marked async. "Closure" = function inside a function  
    await p;  
  });  
}
```



# Await and Assignment

- Promise fulfilled value

Example 1.6

```
async function test() {  
  // You can `await` on a non-promise without getting an error.  
  let res = await 'Hello World!';  
  console.log(res); // "Hello, World!"  
  
  const promise = new Promise(resolve => {  
    // This promise resolves to "Hello, World!" after 1s  
    setTimeout(() => resolve('Hello, World!'), 1000);  
  });  
  res = await promise;  
  // Prints "Hello, World!". `res` is equal to the value the  
  // promise resolved to.  
  console.log(res);  
  
  // Prints "Hello, World!". You can use `await` in function params!  
  console.log(await promise);  
}
```

# Composing Async Functions

- Async functions return a promise

Example 1.7

```
async function computeValue() {  
  await new Promise(resolve => setTimeout(() => resolve(), 1000));  
  // "Hello, World" is the _resolved value_ for this function call  
  return 'Hello, World!';  
}  
  
async function test() {  
  // Prints "Hello, World!" after 1s. `computeValue` returns a promise!  
  console.log(await computeValue());  
}
```

# Resolved Value vs Return Value

The value you **return** from an async function is **not** the return value!

Example 1.7

```
async function computeValue() {  
  await new Promise(resolve => setTimeout(() => resolve(), 1000));  
  // "Hello, World" is the _resolved value_ for this function call  
  return 'Hello, World!';  
}  
  
async function test() {  
  // Prints "Hello, World!" after 1s. `computeValue` returns a promise!  
  console.log(await computeValue());  
}
```

# Comparing Resolved and Returned

## `return` is equivalent to `resolve()` in a promise

Example 1.9

```
let resolvedValue;


async function computeValue() {
  resolvedValue = new Promise(resolve => {
    setTimeout(() => resolve('Hello, World!'), 1000);
  });
  return resolvedValue;
}

async function test() {
  const returnValue = computeValue();
  // This will print `false`. The return value of an async function
  // never equals the resolved value!
  console.log(returnValue === resolvedValue);
  console.log(await returnValue);
}
```

```
async function computeValue() {
  // Adding `Promise.resolve()` below is unnecessary. It adds
  // perf overhead because you're creating an unnecessary promise.
  // "Unnecessary code is not as harmless as I used to think. It
  // sends the misleading signal that it's necessary." - Paul Graham
  return Promise.resolve('Hello, World!');
}
```


# Exercise 1: Gather Blog Post Comments

- The [JSONPlaceholder API](https://jsonplaceholder.typicode.com/) has 2 endpoints:
  - `/comments?postId=${id}`
  - `/posts`

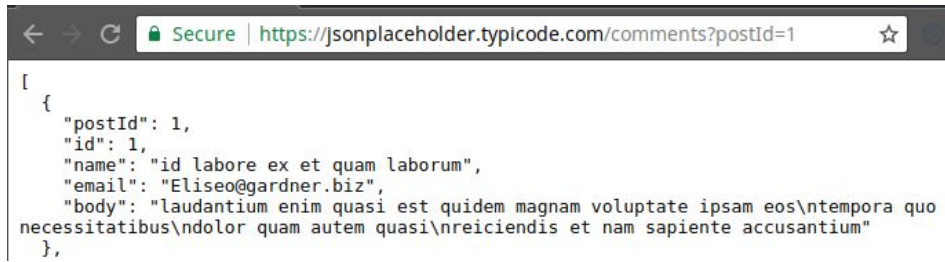

A screenshot of a web browser displaying the JSONPlaceholder API comments endpoint. The address bar shows the URL `https://jsonplaceholder.typicode.com/comments?postId=1`. The page content shows a single JSON object representing a comment for post ID 1.

```
[
  {
    "postId": 1,
    "id": 1,
    "name": "id labore ex et quam laborum",
    "email": "Eliseo@gardner.biz",
    "body": "laudantium enim quasi est quidem magnam voluptate ipsam eos\ntempora quo necessitatibus\ndolor quam autem quasi\nreiciendis et nam sapiente accusantium"
  },
]
```

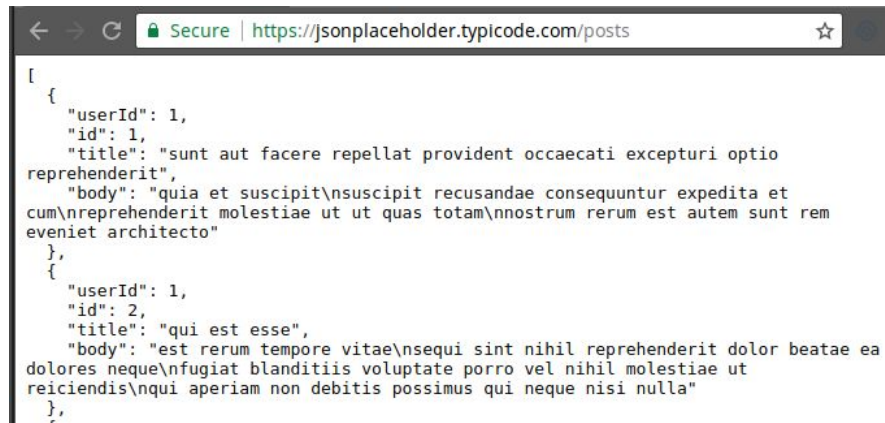

A screenshot of a web browser displaying the JSONPlaceholder API posts endpoint. The address bar shows the URL `https://jsonplaceholder.typicode.com/posts`. The page content shows a list of two JSON objects representing blog posts.

```
[
  {
    "userId": 1,
    "id": 1,
    "title": "sunt aut facere repellat provident occaecati excepturi optio reprehenderit",
    "body": "quia et suscipit\nsuscipit recusandae consequuntur expedita et cum\nreprehenderit molestiae ut ut quas totam\nnostrum rerum est autem sunt rem eveniet architecto"
  },
  {
    "userId": 1,
    "id": 2,
    "title": "qui est esse",
    "body": "est rerum tempore vitae\nsequi sint nihil reprehenderit dolor beatae ea dolores neque\nfugiat blanditiis voluptate porro vel nihil molestiae ut reiciendis\nqui aperiam non debitis possimus qui neque nisi nulla"
  },
]
```

# Exercise 1: Gather Blog Post Comments

- `fetch()` a list of blog posts
- `fetch()` comments for each of those posts
- Find the **postId** for the comment that contains “dolorum soluta”
- <http://bit.ly/async-await-exercise-1>

## Part 2: Error Handling

- **await** on a fulfilled promise returns the computed value
- **await** on a rejected promise throws an error

Example 1.10

```
async function test() {  
  try {  
    const p = Promise.reject(new Error('Oops!'));  
    // The below `await` throws  
    await p;  
  } catch (error) {  
    console.log(err.message); // "Oops!"  
  }  
}
```

# Consolidated Error Handling

- 3 different patterns to handle all CB errors

Example 1.1.2

```
function testWrapper(callback) {  
  try {  
    // There might be a sync error in `test()`  
    test(function(error, res) {  
      // `test()` might also call the callback with an error  
      if (error) {  
        return callback(error);  
      }  
      // And you also need to be careful that accessing `res.x` doesn't  
      // throw **and** calling `callback()` doesn't throw.  
      try {  
        return callback(null, res.x);  
      } catch (error) {  
        return callback(error);  
      }  
    });  
  }  
}
```



# Consolidated Error Handling

- Async function try/catch handles sync errors

Example 1.11

```
async function test() {  
  try {  
    const bad = undefined;  
    bad.x;  
    const p = Promise.reject(new Error('Oops!'));  
    await p;  
  } catch (error) {  
    // "cannot read property 'x' of undefined"  
    console.log(err.message);  
  }  
}
```

# Unhandled Errors Become Rejections

- Throwing rejects the async function promise

Example 1.14

```
async function computeValue() {  
  // 'err' is the "rejected value"  
  const err = new Error('Oops!');  
  throw err;  
}  
  
async function test() {  
  try {  
    const res = await computeValue();  
    // Never runs  
    console.log(res);  
  } catch (error) {  
    console.log(error.message); // "Oops!"  
  }  
}
```

# Rejected Value vs Sync Error

- *Rejected value* like resolved value for errors

Example 1.14

```
async function computeValue() {  
  // 'err' is the "rejected value"  
  const err = new Error('Oops!');  
  throw err;  
}  
  
async function test() {  
  try {  
    const res = await computeValue();  
    // Never runs  
    console.log(res);  
  } catch (error) {  
    console.log(error.message); // "Oops!"  
  }  
}
```

# Await Throws, Not the Function Call

Example 1.15

```
async function computeValue() {  
  throw new Error('Oops!');  
};  
  
async function test() {  
  try {  
    const promise = computeValue();  
    // With the below line commented out, no error will be thrown  
    // await promise;  
    console.log("No Error");  
  } catch (error) {  
    console.log(error.message); // Won't run  
  }  
}
```

# Should You Use Try/Catch?

- `catch()` works too, often a better choice

Example 1.17

```
async function computeValue() {  
  throw new Error('Oops!');  
};  
  
async function test() {  
  let err = null;  
  await computeValue().catch(_err => { err = _err; });  
  console.log(err.message);  
}
```



# Try/Catch vs. **catch()**

- Try/catch for specific, **catch()** for general
- Don't use try/catch to wrap the entire function

```
Example 1.18 |
// If you find yourself doing this, stop!
async function fn1() {
  try {
    /* Bunch of logic here */
  } catch (err) {
    handleError(err);
  }
}

// Do this instead
async function fn2() {
  /* Bunch of logic here */
}

fn2().catch(handleError);
```

## Exercise 2: Retrying Failed Requests

- Exercise 1 assumed the API was reliable
- What about if every 2nd request fails?
- Need to wrap **fetch()** to retry 3 times
- <http://bit.ly/async-await-exercise-2>

# Key Takeaways

- Async functions always return a promise
- **return** resolves the returned promise
- **throw** rejects the returned promise
- **await** pauses execution until promise settles
- **await p** returns the value p is fulfilled with



# Further Reading

- <http://bit.ly/node-promises-from-scratch>
- <http://bit.ly/async-await-design-patterns>
- <http://bit.ly/node-async-await>
- *The 80/20 Guide to ES2015 Generators*

# Thanks for Attending!

The *Mastering Async/Await* Ebook, May 23, 2018

[tinyletter.com/mastering-async-await](http://tinyletter.com/mastering-async-await)

