
Runs

Each *run* has a different combination of parameter values (ie. decision rule, number of firms, polarisation of subpopulations, and relative size of subpopulations).

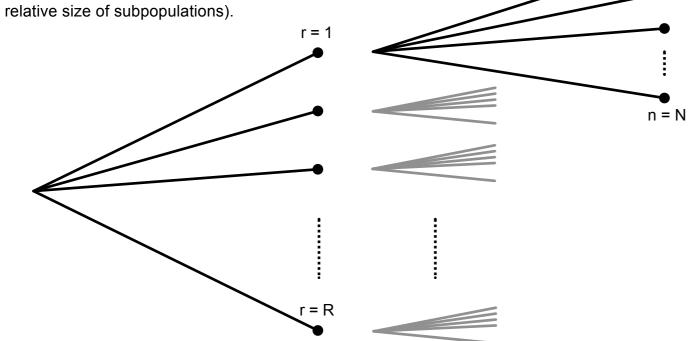

Repetitions

Each *repetition* has a different

initial location of firms.

Iterations

