

Relationships and operations in agent's sign-based model of the world

Gennady S. Osipov*, Aleksandr I. Panov*

*Federal Research Center "Computer Science and Control" Russian Academy of Sciences,
Moscow, Russia*

Abstract

According to modern theories of mental function's emergence and the role of neurophysiological processes therein, the mental function formation is associated with the existence or communicative synthesis of specific information structures containing three information types of different origin: information coming from the external environment, information extracted from the memory and information coming from motivation centres. The binding of these components into a single entity is ensured by naming them; this also provides for the emerging structures stability. We call such information structures as signs due to their resemblance to similar structures that have been studied in semiotics. The set of signs formed by the actor during activities and communication forms his sign based world model reflecting his ideas about the environment, himself and other actors.

The sign based world model enables the setting and resolution of a number of tasks arising for intelligent agents and their coalitions during behaviour modeling, such as goal-setting, purposeful behaviour synthesis, role distribution, and the interaction of agents in the coalition. The paper considers a special object - the causal matrix, which describes the structure of the sign components. Operations and relationships in the sign based world model simulating of the psychological characteristics of human behaviour are determined on this basis.

*Corresponding author

Email addresses: gos@isa.ru (Gennady S. Osipov), pan@isa.ru (Aleksandr I. Panov)

Keywords: sign based world model, sign image, sign significance, sign personal meaning, causal matrix, semiotic network, script generation, agglutination, generalization

Introduction

Apparently, the issue of feeling occurrence is one of the central issues of cognitive psychology. Also, there is no clarity regarding the relationship of this phenomenon to the actors world model formation. In psychologists works, such as those by A. N. Leontiev [1, 2], the representation of each object or reality phenomenon in the mind consists of three components: an image of the object, its cultural and historical meaning, and personal meaning. According to the image concept developed in cognitive psychology, perception is considered to be a categorization process, and the meaning corresponds to the objects mission, the signs semantic component, and the personal meaning is interpreted as a set of actions regarding the object as preferred by the actor. It is easy to notice that this structure is close to the structure named as a sign in semiotics [3, 4], so the approach developed in this paper can be pertinently called a sign-oriented or semiotic approach. The structure of the world model described above is supported not only by the cultural and historical approach, but by other psychological theories as well, particularly by Stanovichs three-process model [5]. According to this, unlike the well-known two-process model by Kahneman [6], mental processes are implemented by three subsystems: reflective, algorithmic and autonomous ones.

These considerations are supported by the results of many neurosurgery studies, first of all [7], which associate feeling occurrence, i.e. the transition from the neurophysiological level to the psychological level, with the circular motion of the excitation of part of the brain cortex, which returns to the place of the original signal projection after further processing by other brain structures (the “feeling circle”). The mental function [8] is based on the synthesis of three information types (i.e. forming ternary structures): information coming

from the external environment (sensory information), and information extracted from the memory and information coming from motivation centres. We should note that the works [9] also indicate the possibility of the presence of the sign structure in the activity actors world model, and [10] considers the mechanism for forming some cognitive functions and its relationship with the formation of the linguistic world model. The work [11] deals with the emergence of communication mechanisms based on a semiotic approach. In [12], Roy suggested the sign based model of the world as the basis of robots operating component.

In subsequent years, the application of the idea of returning excitation to explain the mechanisms of consciousness and the “sign” hypothesis has been supported by the results of many studies, including data gathered on the structure of those brain parts involved in the “feeling circle”. The sign components are neurally realized in various subsystems of the brain. The image component of the sign is realized through the distribution of neural activation from the primary sensory sections of the cortico-thalamic system to the associative ones. The researchers describe two ways for such activation to take place: the lower (ventral) stream determines spatially independent object characteristics of the incoming sensory information and the back (dorsal) stream recognizes the spatial configuration and actions [13]. The existence of these two activation flows justifies the existence of object and procedural features in the sign’s image component (section 3).

The existence of the process of image recognition, in which predicting feedback of the neurons preactivation (details in section 3.1) places a role, creates the effect of re-entering into the primary cortex sections [9, 7]. The personal meaning component is a product of interaction between the cortex motor sections and subcortical structures, such as thalamus, basal ganglia, amygdala and hypothalamus. These brain subsystems implement the integration of the previous action experience and the action choice in the current situation, taking into account the current motive and purpose [14]. The hippocampus is also closely related to the personal meaning component, and it plays an important role in the episodic memory formation, i.e. a description of the current and re-

cent activity situation [15]. Finally, the meaning component is the result of the generalizing and abstracting brain function, which is realized by the frontal and superior temporal sections of the brain cortex. These sections are also involved in the binding of all sign components with their subsequent naming [10, 16].

In section 1, we will describe a high-level conceptual part of the model; we will not delve into sign structure details but instead describe the general scheme of its formation and its syntax determination. Section 2 provides an interpretation of the sign components through the use of a predicate logic and rule system (operational semantics). Further, the main attention will be paid to the neurophysiologically and psychologically plausible sign based model and its structure (section 3). At the structural level, basic mathematical objects will be suggested, sign components determined, and the algorithm of the image component described. Further, a structural definition is given to the basic relationship groups of the sign components and the concept of semiotic network as the world model simulation is introduced (section 4). To demonstrate the constructed models applicability, section 5 covers basic operations in the world model, simulating the known cognitive functions: generalization, script formation and the meaning agglutination.

1. Syntactic level

We determine the syntactic level of the world model simulation according to the works [17, 18]. Let there be given a set S called the sign set. Each element $s \in S$ has the form $s = \langle n, p, m, a \rangle$, where $n \in N$, $p \subseteq P$, $a \subseteq A$, $m \subseteq M$. Here, N — is a set of finite length words in some alphabet, which we call the name set; P — is a set of closed atomic formulas of the first order predicate calculus, which we call the property set; M — will be called the significance set; and A — is the meaning set. Both the significance set M and the meaning set A are interpreted by a set of actions due to psychological considerations. As done regarding Artificial Intelligence, we represent every action through the rule [19]. The rule is an ordered triple of sets $r = \langle Con, Add, Del \rangle$, where Con — is the

rule condition; *Add* — is a set of facts added by the rule r ; and *Del* — is a set of facts deleted by the rule r . In a general case, each of these sets is a set of atomic formulas of the first order predicate calculus. In more detail, the role of these rules in the sign based model will be described in the next section.

Now, let us introduce linking operators. $\Psi_p^m : 2^P \rightarrow 2^M$ — is the operator coupling the image p with the significance m . The second operator $\Psi_m^a : 2^M \rightarrow 2^A$ associates the significances with the meanings. The third operator $\Psi_a^p : 2^A \rightarrow 2^P$ associates the meanings with the images. The operators that are introduced associate the sign components with one another, and their semantics are determined in the next section. At the syntactic level of the model, the basic algorithms are determined: the sign formation and self-organizing procedures [17].

2. Semantic level of the model

At the semantic level of the world model simulation, the operational semantics of the linking operators introduced at the syntactic level are specified, and the sign components are interpreted by the set of predicate calculus symbols and the rules determined in the artificial intelligence [18, 20].

Let us determine the linking operator (Figure 2) $\Psi_p^m(p^{(i)}) = m^{(i)}$, so that $m^{(i)} = \{r | \mathcal{P}_c(r) \subseteq \mathcal{P}(p^{(i)})\}$, where $\mathcal{P}_c(r)$ is a set of different predicate symbols of the condition rule r interpreting the significance m (hereinafter, we will associate one action, i.e. one rule, with each significance for the explanation simplicity); $\mathcal{P}(p^{(i)})$ — is the set of image predicate symbols $p^{(i)}$; $p^{(i)} \in 2^P$, $m^{(i)} \in 2^M$, 2^P and 2^M are P and M Booleans respectively.

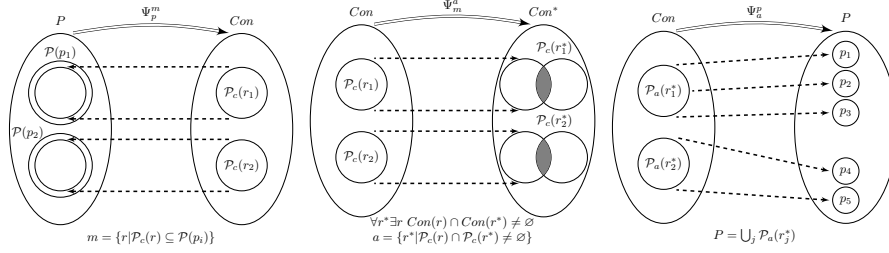


Figure 1: Schemes of linking operators.

110 The second operator $\Psi_m^a(m^{(i)}) = a^{(i)}$, where $a^{(i)} = \{r^* | \mathcal{P}_c(r) \cap \mathcal{P}_c(r^*) \neq \emptyset\}$, where $\mathcal{P}_c(r)$ — is the set of rule r^* condition predicate symbols Con interpreting the personal meaning $a^{(i)}$ (here, same as in the significance case, each personal meaning is associated with one action, i.e. one rule, for the explanation simplicity); $m^{(i)} \in 2^M, a^{(i)} \in 2^A, 2^A$ — is Boolean A . The third operator
115 $\Psi_a^p(a^{(i)}) = p^{(i+1)}$, where $p^{(i+1)} \subseteq \mathcal{P}_a(r_j^*), a^{(i)} \in 2^A, p^{(i+1)} \in 2^P$, where $\mathcal{P}_a(r_j^*)$ is the set of predicate symbols from addition set of the rule r_j^* .

Of course, $p^{(i)} \neq p^{(i+1)}$. It can be shown that under certain initial approximation, this iterative process converges to p , wherein, $\|\mathcal{P}_c(r) \cap \mathcal{P}_c(r^*)\| \geq 2$. It is easy to see that a sufficient convergence condition is $\mathcal{P}_c(r) \subseteq \mathcal{P}_c(r^*)$. If
120 we introduce operator $\Psi_m^p = \Psi_a^p \Psi_m^a$, it is easy to see that the operator couple Ψ_p^m and Ψ_m^p forms a Galois correspondence and that the sign is the fixed Galois closure point for operators Ψ_p^m and Ψ_m^p .

At the semantic level of the world model simulation, it becomes possible to describe the relationship in the set of sign components: the relationship
125 of the set of images, significances and personal meanings. Each relationship of these domains can be translated to multiple names making it possible to determine the relationship of the sign set. Further, we will provide semantic definitions for these relationships and opens in the sign set. All relationships and operations will be specified during the sign component structure consideration
130 at the structural level.

2.1. Operations and relationships in the sign set

Let $S = \{s_1, s_2, \dots, s_k\}$ — be a sign set, $p_1 = (x_1, x_2, \dots, x_g)$ and $p_2 = (y_1, y_2, \dots, y_h)$ — images of the signs s_1 and s_2 , x_i — the i th feature. The ordered sets $\tau_1 = \langle i_1, i_2, \dots, i_g \rangle$ and $\tau_2 = \langle j_1, j_2, \dots, j_h \rangle$, where $i_1, i_2, \dots, i_p \in \{1, \dots, g\}$, $j_1, j_2, \dots, j_q \in \{1, \dots, h\}$, will be named as image types for the signs s_1 and s_2 respectively.

Definition 1. If for the signs s_1 and s_2 $\tau_1 = \tau_2$ and $x_i = y_i$, then $R_{eq}^p := R_{eq}^p \cup \{(s_1, s_2)\}$, $R_{eq}^p \subseteq S \times S$.

It is easy to see that the relationship R_{eq}^p — is an equivalence relationship of the sign image set S . The relationships R_{in}^p , R_{sim}^p , R_{con}^p that are determined lower are inclusion, similarity and contrast relationships accordingly.

Definition 2. If $x_i = y_i$ is valid for the signs s_1 and s_2 , $\tau_1 \subset \tau_2$ and $\forall i \in \tau_1$, then $R_{in}^p := R_{in}^p \cup \{(s_1, s_2)\}$, $R_{in}^p \subseteq S \times S$.

Definition 3. If $x_i = y_i$ is valid for the signs s_1 and s_2 , $\tau_1 \cap \tau_2 \neq \emptyset$ and $\forall i \in (\tau_1 \cap \tau_2)$, then $R_{sim}^p := R_{sim}^p \cup \{(s_1, s_2)\}$, $R_{sim}^p \subseteq S \times S$.

Definition 4. If $x_i \neq y_i$ is valid for the signs s_1 and s_2 , $\tau_1 \cap \tau_2 \neq \emptyset$ and $\forall i \in (\tau_1 \cap \tau_2)$, then $R_{con}^p := R_{con}^p \cup \{(s_1, s_2)\}$, $R_{con}^p \subseteq S \times S$.

The given definitions are procedures for the generation of new relationship elements in the sign set. Starting every time when the sign set is replenished with a new sign (or when the sign set starts being used), the procedures described either form a new relationship or supplement one of the sign relationships with a new element.

The generalization operation Θ^p is determined with the set of sign pairs belonging to the relationship R_{sim}^p ; the work result Θ^p is a new image, including all common features of the original images. Namely, if P is the image set, $p_1 \subset P, p_2 \subset P, p_1 = (x_1, x_2, \dots, x_g), p_2 = (y_1, y_2, \dots, y_h)$, then $\Theta : P \times P \rightarrow P$, so that for any p_1, p_2 , which $(s_1, s_2) \in R_{sim}^p, \Theta^p(p_1, p_2) = p_3$, where $p_3 = (z_1, z_2, \dots, z_l)$, then $\forall i \exists j, k$ which $z_i = x_j = y_k$. The image formed as the generalization result can be a basis for the new sign's formation.

160 Proceeding to the sign significances, it is necessary to recall that the significance is a set of generic actions performed by the actor with the object represented by the sign. However, every action is matched by a set of certain roles, substituted by the considered action participants as described by Fillmore [1]. Thus, the significance of each sign will be associated with an ordered set, 165 called the role set. It is clear that each role can also be substituted by the sign. These considerations underlie the formation of relationships in the sign set generated by their significances, which may logically be called the script one.

So, if $I = \{i_1, i_2, \dots, i_q\}$ is a set of all possible roles, the significance of each sign is a subset of this set. For simplicity, we assume that each significance 170 includes one action. Now, let s_1, s_2 be signs and $m(s_1) = \langle i_1, i_2, \dots, i_k \rangle$ is the sign significance, where $i_1, i_2, \dots, i_k \in I$.

Defenition 5. *If s_2/i_j is valid for the signs s_1, s_2 (the sign s_2 substitutes the role i_j), then $i_j \in m(s_1)$, then $R_{sc}^m := R_{sc}^m \cup \{(s_1, s_2)\}$.*

This relationship can logically be called the script relationship as it allows 175 generating complex structures — scripts, which are sign networks linked by their significances and names. At the semantic level, it is possible to introduce another number of relationships generated by the significances and personal meanings [17].

Let us define the closure operation according to significances $\Theta^m(s_1, i_j, s_2)$. 180 If s_1 is a sign with the significance $m(s_1)$ and $i_j \in m(s_1)$ is one of this significances roles, the operation constructs a new sign, s^* , in which the role i_j is substituted by the sign s_2 (s_2/i_j). At the same time, the meanings and significances of the original signs merge. We will include all constructed scripts into the set of signs S as regular signs.

185 On the basis of personal meanings, the sign sets naturally generate the relationships of absorption and opposition [17]. Let us recall that every meaning corresponds to a set of specified (particular) actions.

Let us introduce the operation of agglutination $\Theta^a(s_1, s_2) = s_3$. Here, just as above and for the sake of simplicity, we assume that each meaning corresponds

190 to one action described by the rule $\langle Con, Add, Del \rangle$. If s_1, s_2 are signs and a_1, a_2 are their meanings, the agglutination operation generates a new sign s_3 with the meaning a_3 , where $Add(r_3) = Add(r_1) \cup Add(r_2)$ or $Del(r_3) = Del(r_1) \cup Del(r_2)$. It is clear that in both cases $Con(r_3) = Con(r_1) \cap Con(r_2)$, where Con are sets of rule conditions r_1, r_2, r_3 , Add and Del are sets of facts added and deleted by
195 the respective rules.

3. Structural level of the model

Next we will focus on the structural model of the sign components, taking into account modern neurophysiological data on the structure of the cortico-thalamic brain subsystem and the mechanisms for activating transmissions between the cortex sections. The set of predicate symbols $\mathcal{P}(\cdot)$ will be replaced
200 by the set of signs organized as special structures (causal matrices), which, in turn, construct a causal chain. Combining features (predicate symbols) into these structures allows for describing the image component of the sign (a set of predicate symbols), significances and personal meanings (rules with effects and
205 conditions) with a single formalism.

Let us consider the structure of the sign components using the example of the image component involved in recognition of the presented object or process on the basis of sensory information derived from the external environment and registered by internal motor data sensors (the sign is actualized due to the sign
210 image recognition). Before naming, the sign will be called a protosign or feature.

Let us suppose that the input data stream includes a sequence (x_1, x_2, \dots, x_h) of the vector x_i that is in length h for real numbers from 0 to 1, which will be called *events*. Each event x_t that is in length q is a record of q sensor outputs, and each event element provides a certainty degree (subjective probability in
215 the Bayesian sense) of corresponding sensor triggering. For example, the event $(0.1, 0.9, 0.9)$ is received from three sensors — the red, blue and green ones; this means that the degree of certainty of the red sensor triggering is 0.1, and that for the blue and green ones, it is 0.9.

The sign's image component is primarily responsible for recognition of the
 220 object presented on the basis of the input information. During the sign image's
 functioning, a special recognizing function is used or constructed, receiving an
 input of vector sequence, which contains information about the objects features
 at particular moments of time. The recognizing function determines whether
 the object represented by the sign is present (coded) in this sequence. Further,
 225 we will consider this function as being built as a result of a special learning
 process (for details, [21]).

Let us present the recognizing function (i.e., encode the characteristic fea-
 tures of the object or process) with a special structure — the causal matrix
 $z = (e_1, e_2, \dots, e_h)$ of the dimensionality $q \times h$, where q — is the event dimen-
 sion (number of sensors) and h — is the event sequence length. Each column
 e_t of the causal matrix is a binary vector of q length, encoding the features
 (corresponding to 1), which must be present in the input event at the moment t
 to let the presented object or process be identified in the input data stream, i.e.
 set a plurality of simultaneous characteristic features. For example, the sign s
 image representing the “face” object may correspond to the causal matrix

$$z = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix},$$

where the first line is the characteristic vector of information from the left eye
 image sensor, the second one comes from the right eye sensor, the third one
 from the nose, and the fourth one from the mouth (Figure 3).

230 In the above example, each feature of the “face” sign image can also be
 represented by a sign in the actors world model. Thus, the case where the
 characteristic features of the sign image are sensor data is special. More gen-
 erally, the sign image forming features are other signs corresponding to these
 characteristic features. Therefore, we can compare the image p of the sign s to
 235 the set $S_p(s)$ with the power q , each element of which corresponds to a causal

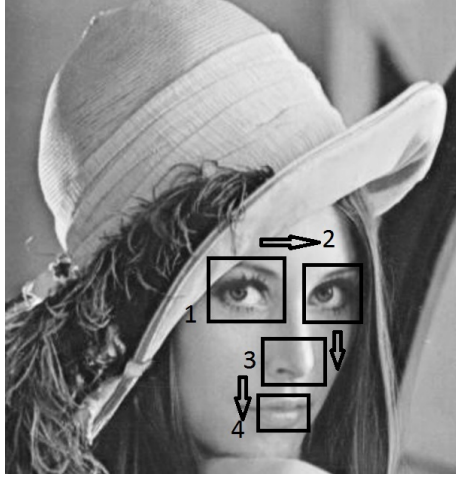


Figure 2: Visual interpretation of the causal matrix. 1 — detection area for the sensor responsible for the left eye, 2 for the right eye, 3 for the nose, and 4 for the mouth. The arrows indicate the time transitions (saccades) from the triggering one sensor to the next one.

matrix line number z sized $q \times h$, i.e. each feature $s_i \in S_p(s)$ corresponds to a characteristic binary vector specifying discrete time moments of ones, during which this feature must be present in the input data in order to successfully recognize the sign s image (to actualize the sign).

Each signs image can correspond to multiple causal matrices, setting various precedents of the presented object or process observation in the environment. All sequence of the sign s image causal matrices will be denoted as $Z^p(s)$.

To clarify the definition of the set $S_p(s)$, we introduce a domain of embedded binary relationships $\{\sqsubset_p, \sqsubset_p^1, \sqsubset_p^2, \dots\}$ defined by the sign set S . We consider the sign s_i as an *element of the sign s image* $(s_i, s) \in \sqsubset_p$ or $s_i \sqsubset_p s$ if $s_i \in S_p(s)$. If it is known that the sign s_i is corresponded by one in the t -th column of the sign s causal matrix $z \in Z^p(s)$, we will use the relationship \sqsubset_p^t so that $\sqsubset_p^t \subset \sqsubset_p$.

3.1. Sign image recognition

Let us briefly describe the algorithm of sign image recognition (sign actualization) in Figure 3. We will consider the sign images to be grouped according to the set $S_p(s)$ similarity into nodes organized as hierarchical structures (for

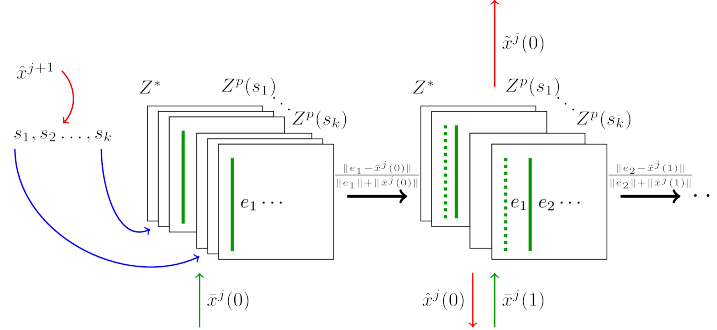


Figure 3: Scheme of the sign image recognition algorithm.

details, [22]). Lower-level nodes include causal matrices of signs that are features for the signs, the causal matrices of which are included in higher-level nodes. These nodes and sign image causal matrices are formed as a result of education [21]; in this algorithm version, we consider all matrices and nodes to be formed and not updated. Further, we will restrict ourselves to the case where all matrices within one node have the same number of columns, which is a natural condition due to the matrix similarity. The period of time, during which all node causal matrix columns are processed, is called the computing cycle of the node.

The algorithm input data is certain initial time τ_s , recognizable feature prediction vector at this hierarchy level $\hat{x}^{j+1}(\tau_s)$ and the input function ω^j setting the sequence of the event input vectors $\bar{x}(t)$. As a result of the algorithm, the output function $\bar{\eta}^j$ is formed, which is a sequence of recognizable feature vectors, and an expectation function, which is the vector sequence of a prediction event for the recognizable features of the lower level hierarchy.

The recognition computing cycle in the level j node starts with defining the initial nodes state through a real vector of the hierarchy upper level - the expectation vector $\hat{x}^{j+1}(\tau_s)$ formed on the basis of the upper level node status (steps 3–14 at the time moment τ_s). The initial state is defined as a sign subset where the images are predicted on the basis of the expectation vector. We introduce a constant c_1 determining the threshold of the recognizable image

275 predicted weight, above which the relevant causal matrices fall into the active
 matrix set Z^* (step 4). Next, causal matrices are selected from the set of active
 ones; for these, the usual distance $\|x\| = \sum_i |x_i|$ according to the first column
 rate e_1 from the event $\bar{x}^j(0)$ at the initial moment of time does not exceed
 the constant c_2 (step 9). The updated set of active causal matrices obtained
 this way is the current state of the node (step 11). On the basis of the active
 causal matrices, the output node vector is calculated by the voting method at
 280 the initial moment of time $\hat{x}^j(0)$ (steps 12 – 13).

Input: $\tau_s, \hat{x}^{j+1}(\tau_s), \omega^j$ - input function.

Output: φ^j - expectation function, $\bar{\eta}^j$ - output function.

```

1:  $F^* = \emptyset, Z^* = \emptyset, t = 0;$ 
2:  $c_1 \in (0, 1), c_2 \in (0, 1);$ 
   // initialize the state
3: for all components  $\hat{x}_k^{j+1}$  of the vector  $\hat{x}^{j+1}(\tau_s) = (\hat{x}_1^{j+1}, \hat{x}_2^{j+1}, \dots, \hat{x}_l^{j+1})$  do

4:   if  $\hat{x}_k^{j+1} \geq c_1$  then
5:      $F^* = F^* \cup \{s_k\};$ 
6:    $\bar{x}(0) := \omega^j(\tau_s);$ 
7:   for all signs  $s_k \in F^*$  do
8:     for all causal matrices  $z \in Z^p(s_k)$  do
9:       if  $\frac{\|e_1 - \bar{x}^j(0)\|}{\|e_1\| + \|\bar{x}^j(0)\|} < c_2$  then
10:         $Z^* := Z^* \cup \{z\};$ 
11:  $Z^*$  - initial node state;
12:  $\bar{N} = (|\{z|z \in Z^*, z \in Z^p(s_1)\}|, \dots, |\{z|z \in Z^*, z \in Z^p(s_l)\}|);$ 
13:  $\eta(0) := \hat{x}^j = W(\bar{N});$ 
14:  $\varphi^j(0) := \hat{x}^j = W(\sum_{s_k \in F^*} \hat{x}_k^{j+1} \sum_{z \in Z^*} e_2(z));$ 

```

The expectation vector $\hat{x}^j(0)$ is determined as a normalized vector, the s -
 th component of which is equal to the sum of all s -th elements of the causal
 active matrix second columns with weights corresponding to the elements of the
 expectation vector $\hat{x}^{j+1}(\tau_s)$ (step 14). Since the idea of the future input signal
 285 is used (the second column of the causal matrices), $\hat{x}^j(0)$ is the expectation
 vector for the lower level hierarchy.

```

// main circle
15:  $t = 1$ ;
16: while  $t \leq h^j - 1$  do
17:    $\bar{x}^j := \omega(t)$ ;
18:   for all causal matrices  $z$  in the set  $Z^*$  do
19:     if  $\frac{\|e_t - \bar{x}^j(t)\|}{\|e_t\| + \|\bar{x}^j\|} \geq c_2$  then
20:        $Z^* = Z^* \setminus \{z\}$ ;
21:    $Z^*$  - current state;
22:    $\tilde{N} = (|\{z|z \in Z^*, z \in Z^p(s_1)\}|, \dots, |\{z|z \in Z^*, z \in Z^p(s_l)\}|)$ ;
23:    $\eta(t) := \tilde{x}^j = W(\tilde{N})$ ;
24:    $t = t + 1$ ;
25:   if  $t \leq h^j - 2$  then
26:      $\varphi^j(t) := \hat{x}^j = W(\sum_{s_k \in F^*} \hat{x}_k^{j+1} \sum_{z \in Z^*} \bar{e}_t(z))$ ;
return  $\varphi^j, \vec{\eta}^j$ .

```

After determining the initial state, the main cycle starts working, which repeats the output vector and state calculation at the following moment until the time exceeds the characteristic node time h^j (the number of causal matrix columns, steps 16–26). At the beginning of this stage, the state, i.e. the set of active causal matrices Z^* , is updated due to removal of the matrices, the corresponding columns of which are much different from the current event $\bar{x}^j(t)$ (step 19). Next, the output vector $\tilde{x}^j(t)$ is calculated by the voting method, according to the matrix number in the set of active causal matrices corresponding to the image (steps 22–23).

At the end of the main cycle, the expectation output vector is calculated for the next moment of time $\hat{x}^j(t)$. The expectation vector is equal to the normalized vector, the elements of which are equal to the column element sum of the active causal matrices corresponding to the current moment of time regarding the weights of the initial expectation vector $\hat{x}^{j+1}(\tau_s)$ (step 26).

3.2. Causal network

We introduce a special procedure $\Lambda_p : 2^Z \rightarrow 2^{\mathbb{N}} \times 2^{\mathbb{N}}$, which associates two disjoint column index subsets $I^c \subset \mathbb{N}, \forall i \in I^c i \leq h$ and $I^e \subset \mathbb{N}, \forall i \in I^e i \leq h$ ($\Lambda_p(Z^p(s)) = (I^c, I^e)$) with each sequence $Z^p(s) \subset Z$ of the sign s image causal

305 matrices, so that $I^c \cap I^e = \emptyset$. The set I^c will be called condition column indices, and the set I^e will be called effect column indices. For example, if the procedure Λ_p provides two sets $\{1\}$ and $\{2\}$ for the matrix sequence Z consisting of only one matrix $((1, 0), (0, 1))$, this means that the appearance of an feature corresponding to the first matrix row causes the appearance of an
310 feature corresponding to the second matrix row in the sequence. Thus, the procedure Λ_p establishes a causal relationship regarding the set of input events and can be implemented in various ways including FCO, Norris algorithms, etc. [23, 24]. In this paper, we will consider only the cases where the causal matrix columns belong to two subsets (conditions and effects). There may be situations
315 when the causal matrix columns form a chain of causes and effects; in this case, the function Λ_p will issue more than two column subsets.

If the effect column set for the sign s image matrices $Z^p(s)$ is not empty $I^e \neq \emptyset$, we assume that the sign is an action or process, the result of which is encoded in the effect columns and its condition is encoded in the condition
320 columns (the corresponding sign is procedural). Otherwise, if the effect column set of the sign s image matrices $Z^p(s)$ is empty $I^e = \emptyset$, i.e. if it cannot be determined which events precede others by the causal matrix sequence, we will consider the causal relationship as not being established, and consider the sign to represent an object or situation (the corresponding sign is object).

325 The following statements are true concerning the properties of the procedure Λ_p :

- $I^c \cap I^e = \emptyset$ — the causal matrix column cannot be both the condition and the effect at the same time,
- $|I^c \cup I^e| = h$ — other column types, except the condition and effect ones,
330 are absent,
- $I^c \neq \emptyset$ — among the causal matrix columns, there must be at least one condition column, whereas the effect one may be absent (in the case of object features),

- $\forall i \in I^e, j \in I^c \ i > j$ — all conditions precede the effects in time.

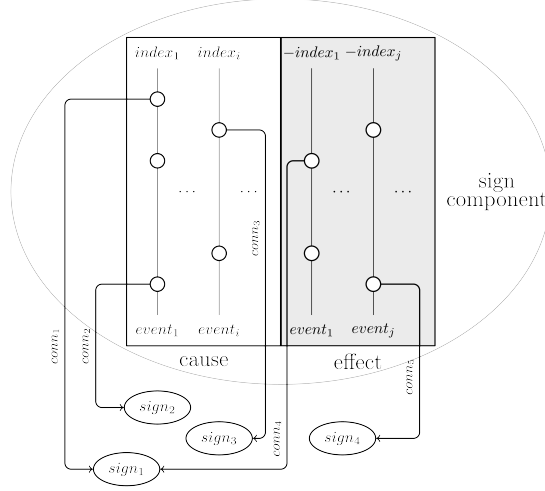


Figure 4: Causal matrix example

335 Proceeding to the notation used at the semantic level of the model (section
2), we can consider the causal matrix z to be a rule $r = \langle F_C(z), F_A(z), F_D(z) \rangle$,
in which

- $F_C(z) \subseteq S_p(s)$ — is a set of the features-conditions for the rule: $\forall f \in F_C(z) \ f \sqsubset_p^i s, i \in I^c$;
- 340 • $F_A(z) \subseteq S_p(s)$ — is a set of the features added by the rule: $\forall f \in F_A(z) \ f \sqsubset_p^i s, i \in I^e, f \not\sqsubset_p^j f_p, j \in I^c$;
- $F_D(z) \subseteq S_p(s)$ — is a set of the features deleted by the rule: $\forall f \in F_D(z) \ f \not\sqsubset_p^i s, i \in I^e, f \sqsubset_p^j s, j \in I^c$.

The causal matrix example based on the above is shown in Figure 4.

345 Now, we introduce the notion of causal network, which will determine the
heterarchy of the causal matrix set. The causal network $W_p = \langle V_p, E_p \rangle$ is a
labelled directed graph, in which

- each node $v \in V_p$ corresponds to the sign s image causal matrix sequence $Z^p(s)$, referred to as $v \rightarrow Z^p(s)$;

- the edge $e = (v_1, v_2)$ belongs to the graph edge set E if $v_1 \rightarrow Z^p(s_1), v_2 \rightarrow Z^p(s_2)$ and $s_1 \in S_p(s_2)$, i.e. if the sign s_1 is an element of the image s_2 ;
- each graph edge $e = (v_1, v_2), v_1 \rightarrow Z^p(s_1), v_2 \rightarrow Z^p(s_2)$ is associated with a label $\epsilon = (\epsilon_1, \epsilon_2, \epsilon_3)$ — a sequence of three integers:
 - ϵ_1 - the index of the original matrix in the sequence $Z^p(s_1)$ can accept a special 0 value, if the sources are matrices of the sequence
 - ϵ_2 — the index of the target matrix in the sequence $Z^p(s_2)$, the row of which is associated with the feature s_1 ;
 - ϵ_3 — the column index in the target matrix, in which there is 1 in the row corresponding to the feature s_1 , can accept positive (condition columns) and negative values (effect columns).

The causal network is a special type of non-uniform semantic network [25]. An example of such network is given in Figure 5.

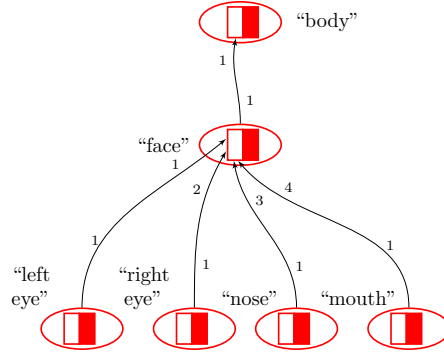


Figure 5: Causal network example of the sign image set. Here, the causal matrices are shown as squares; the condition columns are the left white parts of the squares, the effect columns are the right black parts of the squares. The ϵ_1 label is displayed at the start of each arrow, the ϵ_2 label is the square number, at which the arrow points, and the ϵ_3 label is displayed at the end of each arrow.

Similarly, the causal networks are determined for the other sign components — for significance and personal meaning. For each sign s , the sets $S_m(s)$ and

365 $S_a(s)$ are determined, i.e. the domains of embedded relationships $\{\sqsubset_m, \sqsubset_m^1, \sqsubset_m^2, \dots\}$ are a *significance element* and $\{\sqsubset_a, \sqsubset_a^1, \sqsubset_a^2, \dots\}$ are a *meaning element*. The set $S_m(s)$ is interpreted as the role composition of the s sign, i.e. subdomain elements or the action role in accordance with the semantic level of the model. The set $S_a(s)$ is interpreted as an instant component constitution of the situation
 370 observed and experienced by the actor holding world model or action committed by the actor at the moment. The sets $Z^m(s)$, $Z^a(s)$ and procedures Λ_m , Λ_a are similarly determined.

Three types of causal networks differ from each other due to the relationships generated on the basis of these networks for the corresponding set of sign
 375 components, the operations performed in these networks, and the role they play during the implementation of cognitive functions such as behaviour planning [22, 26]. Now, we can clarify the definition of the sign [18] using the introduced formalism of the causal matrices and causal networks.

Defenition 6. *As the sign, we consider $s = \langle n, p, m, a \rangle$, where n is the sign
 380 name, $p = Z^p$ is the sign image, i.e. the causal matrix sequence corresponding to a certain causal network node with images regarding all input and output links, $m = Z^m$ is the sign significance, i.e. the causal matrix sequence corresponding to a certain causal network node with significances regarding all input and output links, and $a = Z^a$ is the sign image, i.e. the causal matrix sequence corresponding to a certain causal network node with personal meanings regarding
 385 all input and output links.*

Further, we will assume that each sign has a significance, i.e. $Z^m \neq \emptyset$. If the sign has no image, i.e. $Z^p = \emptyset$, $S_p = \emptyset$, it will be called the *category sign* (we will distinguish between metaconcepts and categories). Finally, if the sign has
 390 no assigned personal meaning, i.e. $Z^a = \emptyset$, $S_a = \emptyset$, it will be called *impersonal*.

4. Semiotic network

Next, we determine three domains of sign set binary relationships generated on the basis of the fragment structure of the three causal network types, including the respective sign components. These relationships correspond to the
 395 relationships introduced at the semantic level.

4.1. Relationships on the set of images

Let us start with determining the sign set relationship generated with causal network images. This requires determining equality, similarity, inclusion and opposition for two causal matrices:

400 **Defenition 7.** *Two causal matrices z_1 and z_2 are equal ($z_1 = z_2$) if and only if the matrix dimensions are equal, sets of effect and condition column coincide $\Lambda(z_1) = \Lambda(z_2)$, and each binary vector e_i^1 , matrix column z_1 are equal to corresponding binary vector e_i^2 , and matrix column z_2 .*

Defenition 8. *Two causal matrices z_1 and z_2 are similar ($z_1 \sim z_2$) if and only
 405 if there are two binary vectors e_i and e_j , matrix columns z_1 and z_2 , and their by-component multiplication (i.e. multiplication of the components corresponding to the same feature; if the corresponding feature is absent in the vector, it is believed that there is zero in its place) is not equal to the zero vector $e_i * e_j \neq 0$, and both of them are either condition columns $i \in I^c(z_1), j \in I^c(z_2)$ or effect
 410 columns $i \in I^e(z_1), j \in I^e(z_2)$.*

Defenition 9. *The causal matrix z_1 is included in the causal matrix z_2 ($z_1 \subseteq z_2$) if and only if any binary vector e_i , matrix column z_1 have a binary vector e_j , matrix column z_2 , so that $e_i|e_j = e_j$ ($|$ is bit-by-bit “or”), and both of them are*

either condition columns $i \in I^c(z_1), j \in I^c(z_2)$ or effect columns $i \in I^e(z_1), j \in$
415 $I^e(z_2)$.

Defenition 10. Two causal matrices z_1 and z_2 are opposed to each other ($z_1 \perp$
 z_2) if and only if the dimensions of the matrices are equal, the sets of effect
and condition column indices coincide $\Lambda(z_1) = \Lambda(z_2)$ and each binary vector
 e_t^1 , matrix z_1 column have no intersection with the respective binary vector e_t^2 ,
420 matrix z_2 column, i.e. $e_t^1 \& e_t^2 = 0$, where $\&$ is bit-by-bit “and”.

In addition to the previously introduced relationship domain “be an image
element” $\sqsubset_p, \sqsubset_p^1, \dots$, based on the relationship definitions for the set of causal
matrices, we determine four relationships based on the sign set S .

Defenition 11. The pair of signs s_1 and s_2 belong to the image equivalence
425 relationship R_{eq}^p , $(s_1, s_2) \in R_{eq}^p$, if the sequence $Z^p(s_1) = \langle z_1^1, z_2^1, \dots \rangle$ is point-
wise equal to the sequence $Z^p(s_2) = \langle z_1^2, z_2^2, \dots \rangle$, i.e. their power is equal and
every causal matrix of the first sequence is equal to the corresponding matrix of
the second sequence, i.e. $|Z^p(s_1)| = |Z^p(s_2)|, \forall z_t^1 \in Z^p(s_1) \exists z_t^2 \in Z^p(s_2) : z_t^1 =$
 $z_t^2, t = l$.

430 **Defenition 12.** The pair of signs s_1 and s_2 belong to **the image similarity**
relationship R_{sim}^p , $(s_1, s_2) \in R_{sim}^p$, if each causal matrix z_i in the sequence
 $Z^p(s_1)$ has a similar matrix z_j in the sequence $Z^p(s_2)$, i.e. $\forall z_i \in Z^p(s_1) \exists z_j \in$
 $Z^p(s_2) : z_i \sim z_j$.

Defenition 13. The pair of signs s_1 and s_2 belong to **the image inclusion**
435 **relationship** R_{in}^p , $(s_1, s_2) \in R_{in}^p$, if each causal matrix z_i in the sequence $Z^p(s_1)$

has an inclusive matrix z_j in the sequence $Z^p(s_2)$, i.e. $\forall z_i \in Z^p(s_1) \exists z_j \in Z^p(s_2) : z_i \subseteq z_j$.

Defenition 14. *The pair of signs s_1 and s_2 belong to **the image opposition relationship** R_{con}^p , $(s_1, s_2) \in R_{con}^p$, if the power of the sequence $Z^p(s_1) = \langle z_1^1, z_2^1, \dots \rangle$ is equal to the power of the sequence $Z^p(s_2) = \langle z_1^2, z_2^2, \dots \rangle$, and each causal matrix of the first sequence is opposed to the corresponding matrix of the second sequence, i.e. $|Z^p(s_1)| = |Z^p(s_2)|, \forall z_t^1 \in Z^p(s_1) \exists z_t^2 \in Z^p(s_2) : z_t^1 \perp z_t^2$.*

Regarding the definitions introduced, the image relationship domain R^p is formed by the relationships of “being an image element”, image equivalence, similarity, inclusion and opposition.

4.2. Relationships on the set of significances

The domain of significance relationships R^m includes the relationships “being a significance element” $\sqsubset_m, \sqsubset_m^1, \dots$ and, similarly to the image case, relationships of significance equivalence R_{eq}^m , similarity R_{sim}^m , inclusion R_{in}^m and opposition R_{con}^m .

In addition, an important role in the significance network during the cognitive function modelling is played by the following two relationships: the classification relationship R_{cl}^m , causal relationship R_{cas}^m and scenario relationship R_{sc}^m .

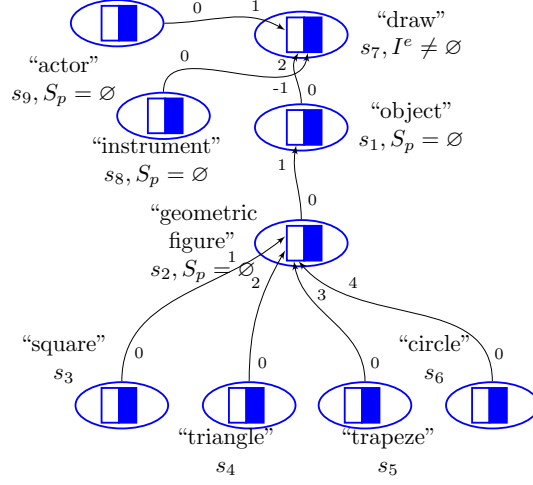


Figure 6: Example of relationship elements in the significance causal network. Here, the set $\{(s_2, s_3), (s_2, s_4), (s_2, s_5), (s_2, s_6), (s_1, s_2)\} \subset R_{cl}^m$ is interpreted as “square, triangle, circle and trapezoid are geometric shapes that are objects for drawing action”. The set $\{(s_7, s_1), (s_7, s_8), (s_7, s_9)\} \subset R_{sc}^m$ is interpreted as “the drawing action is determined by the roles of the actor (the person who is drawing), the tool (used to make the drawing), and the object (what is drawn)”. The symbols are the same as in Figure 5.

455 **Defenition 15.** *The pair of signs s_1 and s_2 belong to **the relationship of classification** R_{cl}^m if s_1 is the category object sign and there is only one sign s_1 significance causal matrix with a single column, in which the only one corresponds to the sign s_2 , i.e. $Z^p(s_1) = \emptyset, I^e(s_1) = \emptyset, \exists z \in Z^m(s_1) : h(z) = 1, |e_1(z)| = 1, s_2 \sqsubset_m^1 s_1$.*

460 **Defenition 16.** *The pair of signs s_1 and s_2 belong to **the scenario relationship** R_{sc}^m , $(s_1, s_2) \in R_{sc}^m$ if s_1 is the procedural sign, s_2 is the object sign, possibly, the category sign, and the sign s_2 is the sign s_1 significance element, i.e. $I^e(s_1) \neq \emptyset, I^e(s_2) = \emptyset, s_2 \sqsubset_m s_1$.*

Examples of relationship elements R_{cl}^m and R_{sc}^m are shown in Figure 6.

4.3. Relationships on the set of personal meanings

The domain of personal meaning relationships R^a includes the relationships “be a meaning element” $\sqsubset_a, \sqsubset_a^1, \dots$ and, similarly to the image case, relationships of meaning equivalence R_{eq}^a , similarity R_{sim}^a , inclusion R_{in}^a and opposition R_{con}^a .

Also, we introduce situational relationships of the personal meaning set R_{sit}^a .

Defenition 17. *The pair of signs s_1 and s_2 belong to the **situational relationship** R_{sit}^a , $(s_1, s_2) \in R_{sit}^a$, if s_1 is the procedural sign, s_2 is the object sign not included in the category, and the sign s_2 is the sign s_1 meaning element, i.e. $I^e(s_1) \neq \emptyset, I^e(s_2) = \emptyset, S_p(s_2) = \emptyset, s_2 \sqsubset_a s_1$.*

On the basis of the situational relationship’s definition, it is possible to introduce the concept of situation determined on the basis of a procedural sign with all the object signs not included in the categories, together with which it constitutes a situational relationship.

Defenition 18. *The sign set $Sit = \{s_1, s_2, \dots, s_n\}$ will be called the **situation** if s_1 is the only procedural sign in the Sit set and for all $1 < i \leq n$ $s_i \in Sit, (s_1, s_i) \in R_{sit}^a$.*

Example of the relationship elements R_{sit}^a and situation is provided in Figure 7.

4.4. Semiotic network

The semiotic network consists of five elements $\Omega = \langle W_p, W_m, W_a, R, \Theta \rangle$, where

- W_p, W_m, W_a — are causal networks of the image, significance and personal meaning sets respectively,

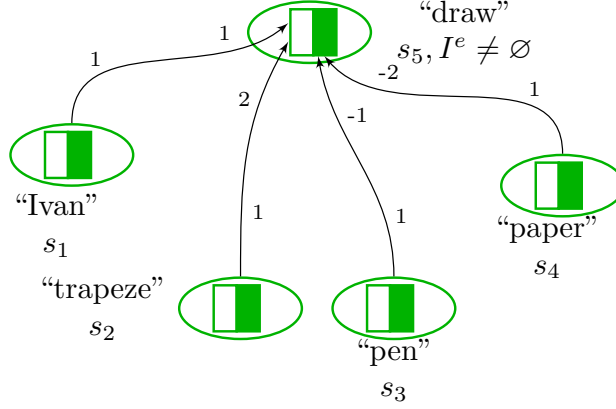


Figure 7: Example of the relationship R_{sit}^a elements in the meaning causal network. Here, the set $\{(s_5, s_1), (s_5, s_2), (s_5, s_3), (s_5, s_4)\} \subset R_{sit}^a$ is equivalent to the situation “Ivan draws a trapezoid with a pencil”. The symbols are the same as in Figure 5.

- R — is the domain of sign set relationships formed on the basis of three causal networks, i.e. $R = \{R^p, R^m, R^a\}$,
- Θ — is the domain of sign set operations (which are defined below).

5. The structure of operations in the semiotic network

At the structural level of the world model simulation, we clarify the definitions of operations functioning in the world model and those generating new signs or scenarios on the basis of two input sign components. In other words, the generation of, for example, a new image on the basis of two other sign images results in the formation of other new signs’ components, according to the rules of the operation. In this paper, for each causal network, the definitions will be given as examples using the ones given at the semantic level in the section 2. For the sake of simplicity, we will consider each sign component as being characterized by one causal matrix (one action, one rule). Further, the procedure of the new sign formation described in [17] will be used and denoted here as Ψ .

5.1. Operation of generalization

Generalization is a key cognitive process enabling the organization of knowl-
 505 edge in a hierarchical form, and the creation of compact representations of
 objects and processes within reality. In psychology, there are three kinds of
 generalization: syncretic, complex and concept [27]. During a syncretic general-
 ization, the leading role is played by sign's personal meaning, i.e. the subjective
 attitude of the actor's world model to the represented objects. During the
 510 formation of complex generalization, the sign images and objectively existing
 features are used. Concept generalization is based on sign significances and it is
 formed in the process of reviewing generic-specific relationships, the knowledge
 of which is coordinated with other participants of the common activity.

Let us define the operation of **image generalization** (complex general-
 515 ization formation) as $\Theta^p : S \times S \rightarrow S$. Let $s_1 = \langle n_1, \{z_1^p\}, \{z_1^m\}, \{z_1^a\} \rangle$,
 $s_2 = \langle n_2, \{z_2^p\}, \{z_2^m\}, \{z_2^a\} \rangle$ be signs, so that $(s_1, s_2) \in R_{eq}^p$, i.e. this exhibits
 similar relationships. The newly formed sign will be denoted as s_3 .

According to the definition 12, this means that $z_1^p \sim z_2^p$, i.e. the causal
 matrices are similar. We define the new causal matrix z_3^p as follows: $z_3^p =$
 520 $(e_1^3, e_2^3, \dots, e_h^3)$, where each column e_i^3 has a pair e_j^1, e_k^2 of matrix z_1^p and z_2^p
 respectively, so that $e_i^3 = e_j^1 * e_k^2 \neq \emptyset$ and $i \in I^c(z_3^p), j \in I^c(z_1^p), k \in I^c(z_2^p)$.
 In other words, the matrix z_3^p is a generalization of the matrices z_1^p and z_2^p
 containing only the events, which are an event generalization for both matrices.

Let Z'_1 and Z'_2 be sets of procedural causal matrices, for which the signs s_1
 525 and s_2 , accordingly, are features. In these two sets, we find a pair of similar
 causal matrices: (z_1^m, z_2^m) . Next, we define the procedural causal matrix z_4^m —
 a new matrix in the significance causal network, which entails the generalization
 of matrices z_1^m and z_2^m : $z_4^m = (e_1^4, e_2^4, \dots)$, where each column e_i^4 has a pair of
 matrices z_1^m and z_2^m columns e_j^1, e_k^2 , so that

- 530 • - in each of them, the reference to the corresponding sign significances s_1
 and s_2 is replaced by a reference to the only empty matrix z_3^m of the newly
 formed sign s_3 ,

- $e_i^4 = e_j^1 * e_k^2 \neq \emptyset$ and
- either simultaneously $i \in I^c(z_4^m), j \in I^c(z_1^m), k \in I^c(z_2^m)$,
- or simultaneously $i \in I^e(z_4^m), j \in I^e(z_1^m), k \in I^e(z_2^m)$.

535

According to the generated pair of matrices z_3^p and z_3^m , we obtain a new sign s_3 with the help of the new sign generation procedure Ψ as the operation Θ^p result; its image is a generalization of sign images s_1 and s_2 , and its significance is a certain role in the generalized action with the signs s_1 and s_2 . The newly formed procedural matrix z_4^m can be included in a node of the existing significance network or serve as a separate node for a new sign, representing a new generalized action.

540

Here is an example of the image generalization operation. Let us have two signs s_1 and s_2 with the names “apple” and “mandarin” respectively. The causal matrices for the sign image components s_1 and s_2 are as follows (features are shown instead of ones):

$$z_1^p = \begin{bmatrix} 0 & 0 & \text{“green”} \\ 0 & \text{“round”} & 0 \\ \text{“peel”} & 0 & 0 \\ \text{“thin”} & 0 & 0 \end{bmatrix} \quad z_2^p = \begin{bmatrix} 0 & 0 & \text{“orange”} \\ 0 & \text{“round”} & 0 \\ \text{“peel”} & 0 & 0 \\ \text{“thick”} & 0 & 0 \end{bmatrix}$$

The sign significance components s_1 and s_2 are connected by the causal network to the procedural signs s_3 “to peel an apple” and s_4 “to peel a mandarin” (here, the vertical bar separates the condition and effect columns):

$$z_3^m = \left[\begin{array}{ccc|ccc} 0 & 0 & 0 & 0 & \text{“table”} & 0 \\ 0 & \text{“apple”} & 0 & 0 & 0 & \text{“apple”} \\ 0 & 0 & \text{“knife”} & 0 & 0 & \\ 0 & 0 & 0 & \text{“on”} & 0 & 0 \\ \text{“closely”} & 0 & 0 & 0 & 0 & 0 \\ \text{“peel”} & 0 & 0 & \text{“peel”} & 0 & 0 \\ \text{“thin”} & 0 & 0 & \text{“thin”} & 0 & 0 \end{array} \right]$$

$$z_4^m = \left[\begin{array}{ccc|ccc} 0 & 0 & 0 & 0 & \text{"table"} & 0 \\ 0 & \text{"mandarin"} & 0 & 0 & 0 & \text{"mandarin"} \\ 0 & 0 & \text{"fingers"} & 0 & 0 & 0 \\ 0 & 0 & 0 & \text{"on"} & 0 & 0 \\ \text{"closely"} & 0 & 0 & 0 & 0 & 0 \\ \text{"peel"} & 0 & 0 & \text{"peel"} & 0 & 0 \\ \text{"thick"} & 0 & 0 & \text{"thick"} & 0 & 0 \end{array} \right]$$

As a result of completing the operation for generalizing the image Θ^p , two signs are formed: generalization on the basis of the features of the sign's image s_5 named "fruit" and generalized on the basis of significance sign feature s_6 "to peel", which is a generalized action that can be done to the fruit:

$$z_5^p = \left[\begin{array}{cc} 0 & \text{"round"} \\ \text{"peel"} & 0 \end{array} \right]$$

$$z_6^m = \left[\begin{array}{ccc|ccc} 0 & 0 & 0 & 0 & \text{"table"} & 0 \\ 0 & \text{"fruit"} & 0 & 0 & 0 & \text{"fruit"} \\ 0 & 0 & 0 & \text{"on"} & 0 & 0 \\ \text{"closely"} & 0 & 0 & 0 & 0 & 0 \\ \text{"peel"} & 0 & 0 & \text{"peel"} & 0 & 0 \end{array} \right]$$

5.2. Closure operation by significances

Another important cognitive function is the ability to generate possible scenarios based on the sign significances. This process plays a special role in the everyday world model, where most cognitive processes forming human behaviour, such as planning and communication, are based on finding, applying and forming new scenarios [22]. In the simplest case, the scenario means an action, in which the particular role performers are fixed, i.e. the scenario is a specified action. Formally, the scenario is the sign set $Scen = \{s_1, s_2, \dots, s_n\}$, where the only procedural sign is s_1 , and all other signs form two subgroups: S_r is the set of role signs and S_o is the set of scenario participant signs. The role signs of the set S_r are category signs associated with the s_1 scenario relationship R_{sc}^m . The

participant signs of the set S_o are either not the signs not being the category
 555 signs associated with the s_1 scenario relationship R_{sc}^m or signs belonging to the
 classification relationship R_{cl}^m being paired with other signs of the set S_r .

We define *the closure operation by significances* Θ^m , which forms the sce-
 nario $Scen$ according to some procedural sign s : $\Theta^m(s) = Scen$. In fact, the
 scenario formation means the iterative inclusion of the signs in the set $Scen$
 560 when considering the relationship elements R_{cl}^m and R_{sc}^m :

Step 1 Include the procedural sign s in the scenario $Scen = \{s\}$.

Step 2 Add the scenario with the signs associated with s_1 the scenario relation-
 ship: $Scen = Scen \cup \{s_i | (s_1, s_i) \in R_{sc}^m, I^e(s_i) = \emptyset\}$.

Step 3 Add the scenario with signs that are not category signs and that are
 565 associated with the scenario object signs by the classification relation-
 ship: $Scen = Scen \cup \{s_j | (s_i, s_j) \in R_{cl}^m, s_i \in Scen, I^e(s_i) = \emptyset, S_p(s_i) =$
 $\emptyset, S_p(s_j) \neq \emptyset\}$.

Step 4 Repeat the Step 3 until the scenario is no longer added with new signs or
 until all the signs of the set determined by the task have been tried. For
 570 example, during goal-setting, only a certain subset of the signs is used,
 which are candidates to the scenario formed [17].

An example of the generated scenario is shown in Figure 8.

5.3. Operation of meaning agglutination

In conclusion, we present a typical example of the personal meaning network
 575 operation — agglutination. The agglutination, fusion, of two sign meanings
 allows for the creation of a new meaning of the third sign, usually already
 present in the world model. In psychology, the new meaning is a combination
 of amalgamating data in experience elements, one of the main mechanisms for
 imagination and creative activities [28]. Examples of the fusion of meanings
 580 include the allegorical figures by Leonardo da Vinci in the art and words like
 “Moidodyr” or “Aibolit” in linguistics.

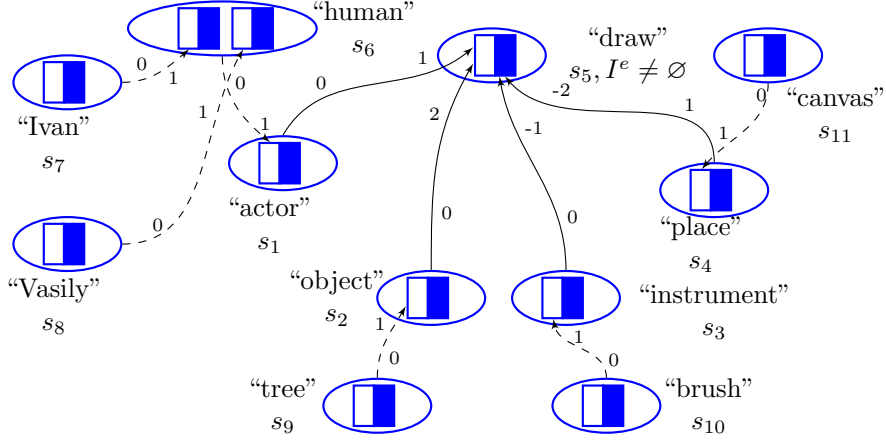


Figure 8: Scenario example. The central procedural sign is s_5 . The role signs are $S_r = \{s_1, s_2, s_3, s_4\}$, the participant signs are $S_o = \{s_7, s_8, s_9, s_{10}, s_{11}\}$. The scenario relationship elements are marked by solid arrows, the classification relationships by the broken ones. The rest of the symbols are the same as in Figure 5.

Using the introduced formalism, we define the operation of agglutination: $\Theta^a: S \times S \rightarrow S$. Let $s_1 = \langle n_1, \{z_1^p\}, \{z_1^m\}, \{z_1^a\} \rangle$, $s_2 = \langle n_2, \{z_2^p\}, \{z_2^m\}, \{z_2^a\} \rangle$. The sign of the world model, which is being formed or already exists, is denoted by s_3 . As a result of the operation Θ^a , the sign s_3 receives a new meaning, represented by causal matrix z_3^a which is built as follows. Let $z_1^a = (e_1^1, e_2^1, \dots, e_h^1)$ and $z_2^a = (e_1^2, e_2^2, \dots, e_l^2)$, the causal matrix is $z_3^a = (e_1^3, e_2^3, \dots, e_q^3)$, where $q = h + l$, $I^c(z_3^a) = I^c(z_1^a) \cup \{i + |I^c(z_1^a)| \mid i \in I^c(z_2^a)\}$, $I^e(z_3^a) = I^e(z_1^a) \cup \{i + |I^e(z_1^a)| \mid i \in I^e(z_2^a)\}$,

$$e_t^3 = \begin{cases} e_t^1, & \text{if } t < |I^c(z_1^a)|, \\ e_{t-|I^c(z_1^a)|}^2, & \text{if } |I^c(z_1^a)| < t < |I^c(z_1^a)| + |I^c(z_2^a)|, \\ e_{t-|I^c(z_2^a)|}^1, & \text{if } |I^c(z_1^a)| + |I^c(z_2^a)| < t < |I^c(z_1^a)| + |I^c(z_2^a)| + |I^e(z_1^a)|, \\ e_{t-|I^c(z_1^a)|-|I^e(z_1^a)|}^2, & \text{if } t > |I^c(z_1^a)| + |I^c(z_2^a)| + |I^e(z_1^a)|. \end{cases}$$

Proceeding to the rule notation, we can say that the new meaning presented by the rule z_3^a is the condition and effect unity of the rules z_1^a and z_2^a : $F_C(z_3^a) = F_C(z_1^a) \cup F_C(z_2^a)$ and either $F_A(z_3^a) = F_A(z_1^a) \cup F_A(z_2^a)$, or $F_D(z_3^a) = F_D(z_1^a) \cup F_D(z_2^a)$ [20].

As an example, let us take the formation of a new personal meaning for the “Saint Petersburg” sign as a result of operations that agglutinate (fuse) meanings of the “newspaper” and “coffee” signs, represented as the following matrices (actions “read newspaper”, “drink coffee”):

$$z_1^a = \left[\begin{array}{ccc|cccc} 0 & 0 & 0 & 0 & 0 & 0 & \text{“news”} \\ 0 & \text{“cafe”} & 0 & 0 & \text{“cafe”} & 0 & 0 \\ 0 & \text{“on”} & 0 & 0 & \text{“on”} & 0 & 0 \\ 0 & 0 & \text{“Nevsky”} & 0 & 0 & \text{“Nevsky”} & 0 \\ \text{“newspaper”} & 0 & 0 & \text{“newspaper”} & 0 & 0 & 0 \\ \text{“in”} & 0 & 0 & \text{“in”} & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 \end{array} \right]$$

$$z_2^a = \left[\begin{array}{ccc|cccc} 0 & 0 & 0 & 0 & 0 & 0 & \text{“coffee”} \\ 0 & \text{“cafe”} & 0 & 0 & \text{“cafe”} & 0 & 0 \\ 0 & \text{“on”} & 0 & 0 & \text{“on”} & 0 & 0 \\ 0 & 0 & \text{“Nevsky”} & 0 & 0 & \text{“Nevsky”} & 0 \\ \text{“cap”} & 0 & 0 & \text{“newspaper”} & 0 & 0 & 0 \\ \text{“in”} & 0 & 0 & \text{“in”} & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 \end{array} \right]$$

The new causal matrix z_3^a will be as follows. The condition columns represent the consistent unity of the matrix condition columns z_1^a and z_2^a (excess zero lines

are omitted)

$$\begin{bmatrix} 0 & \text{"cafe"} & 0 & 0 & \text{"cafe"} & 0 \\ 0 & \text{"on"} & 0 & 0 & \text{"on"} & 0 \\ 0 & 0 & \text{"Nevsky"} & 0 & 0 & \text{"Nevsky"} \\ \text{"newspaper"} & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & \text{"cap"} & 0 & 0 \\ \text{"in"} & 0 & 0 & \text{"in"} & 0 & 0 \end{bmatrix}$$

The effect columns represent the consistent unity of the matrix effect columns z_1^a and z_2^a (excess zero lines are omitted)

$$\begin{bmatrix} 0 & 0 & 0 & \text{"news"} & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & \text{"coffee"} \\ 0 & \text{"cafe"} & 0 & 0 & 0 & \text{"cafe"} & 0 & 0 \\ 0 & \text{"on"} & 0 & 0 & 0 & \text{"on"} & 0 & 0 \\ 0 & 0 & \text{"Nevsky"} & 0 & 0 & 0 & \text{"Nevsky"} & 0 \\ \text{"newspaper"} & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & \text{"cap"} & 0 & 0 & 0 \\ \text{"in"} & 0 & 0 & 0 & \text{"in"} & 0 & 0 & 0 \end{bmatrix}$$

590 In this case, we do not consider the matter of choosing the sign s_3 , the new meaning of which is formed.

Conclusion

This paper presents a new approach to the integration of the activity actors knowledge of the environment and its own features and also consideration of operations based on this knowledge — the sign based world model. The world model simulation is described at the syntactic, semantic and structural levels. The four-component sign concept, which has been introduced in previous authors papers on the basis of neurophysiological and psychological considerations, is used. A special mathematical structure is introduced - the causal matrix integrating the static information representation in the form of the feature set

600

and the procedural information as a rule with effects and conditions. Three types of semantic networks are introduced on the basis of the causal matrix set — for image, significance and personal meaning causal networks. Using the presented formalism, it is possible to construct algorithms restoring relationships with the sign set modelling basic object links and processes of the external world. The paper describes important operations in the world model simulating of key cognitive functions of generalization, scenario formation and meaning agglutination.

Acknowledgment

This work was supported by the Russian Foundation for Basic Research (Project No. 16-37-60055).

References

- [1] A. N. Leontyev, The Development of Mind, Erythros Press and Media, Kettering, 2009.
URL <http://marxists.org/archive/leontev/works/development-mind.pdf>
- [2] F. T. Igira, J. Gregory, Cultural Historical Activity Theory, Handbook of research on contemporary theoretical models in information systems (2009) 434–454doi:10.4018/978-1-60566-659-4.ch025.
- [3] C. Peirce, The Collected Papers of Charles Sanders Peirce, Harvard University Press, 1958.
- [4] G. Frege, Translations from the Philosophical Writings of Gottlob Frege, Philosophical Library, New York, 1952.
- [5] K. E. Stanovich, Distinguishing the reflective, algorithmic, and autonomous minds: Is it time for a tri-process theory?, in: J. Evans, K. Frankish (Eds.),

In two minds: Dual processes and beyond, Oxford University Press, 2009,
pp. 55–88. doi:10.1093/acprof:oso/9780199230167.003.0003.

URL [http://keithstanovich.com/Site/
Research{ }on{ }Reasoning{ }files/Stanovich{ }Two{ }MInds.pdf](http://keithstanovich.com/Site/Research{ }on{ }Reasoning{ }files/Stanovich{ }Two{ }MInds.pdf)

- 630 [6] D. Kahneman, Thinking Fast and Slow, Penguin, New York, 2011.
- [7] A. M. Ivanitsky, Brain basis of subjective experience: information synthesis
hypothesis, Neuroscience and Behavioral Physiology 46 (2) (1996) 251–252.
- [8] A. M. Ivanitsky, Brain science on the way to solving the problem of con-
sciousness, Herald of the Russian Academy of Sciences 80 (3) (2010) 229–
635 236.
- [9] G. M. Edelman, Neural Darwinism: The Theory Of Neuronal Group Se-
lection, Basic Books, New York, 1987.
- [10] A. D. Friederici, W. Singer, Grounding language processing on basic neuro-
physiological principles, Trends in Cognitive Sciences 19 (6) (2015) 329–338.
640 doi:10.1016/j.tics.2015.03.012.
URL <http://dx.doi.org/10.1016/j.tics.2015.03.012>
- [11] A. Loula, J. Queiroz, Synthetic Semiotics : on modelling and simulating
the emergence of sign processes, in: AISB/IACAP World Congress 2012:
Computational Philosophy, Part of Alan Turing Year 2012, Birmingham,
645 2012, pp. 102–129.
- [12] D. Roy, Semiotic schemas: A framework for grounding language in
action and perception, Artificial Intelligence 167 (1-2) (2005) 170–205.
doi:10.1016/j.artint.2005.04.007.
URL [http://linkinghub.elsevier.com/retrieve/pii/
650 S0004370205001037](http://linkinghub.elsevier.com/retrieve/pii/S0004370205001037)
- [13] S. Grossberg, From brain synapses to systems for learning and
memory: Object recognition, spatial navigation, timed condition-
ing, and movement control, Brain Research 1621 (2015) 270–293.

doi:10.1016/j.brainres.2014.11.018.

655 URL <http://dx.doi.org/10.1016/j.brainres.2014.11.018><http://linkinghub.elsevier.com/retrieve/pii/S0006899314015650>

- [14] K. Gurney, T. J. Prescott, P. Redgrave, A computational model of action selection in the basal ganglia. I. A new functional anatomy, *Biological cybernetics* 84 (6) (2001) 401–410. doi:10.1007/PL00007984.

660 [15] E. T. Rolls, A computational theory of episodic memory formation in the hippocampus, *Behavioural Brain Research* 215 (2) (2010) 180–196. doi:10.1016/j.bbr.2010.03.027.

URL <http://dx.doi.org/10.1016/j.bbr.2010.03.027>

[16] F. Pulvermüller, How neurons make meaning: brain mechanisms for embodied and abstract-symbolic semantics, *Trends in Cognitive Sciences* 17 (9) (2013) 458–470. doi:10.1016/j.tics.2013.06.004.

665 URL <http://linkinghub.elsevier.com/retrieve/pii/S1364661313001228>

[17] G. S. Osipov, A. I. Panov, N. V. Chudova, Behavior control as a function of consciousness. I. World model and goal setting, *Journal of Computer and Systems Sciences International* 53 (4) (2014) 517–529. doi:10.1134/S1064230714040121.

670 URL <http://link.springer.com/10.1134/S1064230714040121>

[18] G. S. Osipov, Signs-Based vs. Symbolic Models, in: G. Sidorov, S. N. Galicia-Haro (Eds.), *Advances in Artificial Intelligence and Soft Computing*, Lecture Notes in Computer Science, Springer International Publishing, 2015, pp. 3–11. doi:10.1007/978-3-319-27060-9_1.

675 URL http://link.springer.com/10.1007/978-3-319-27060-9_{_}1

[19] A. N. Vinogradov, G. S. Osipov, L. Y. Zhilyakova, Dynamic intelligent systems: I. Knowledge representation and basic algorithms, *Journal of Computer and Systems Sciences International* 41 (6) (2002) 953–960.

680

- [20] G. S. Osipov, Sign-based representation and word model of actor, in: R. Yager, V. Sgurev, M. Hadjiski, V. Jotsov (Eds.), 2016 IEEE 8th International Conference on Intelligent Systems (IS), IEEE, 2016, pp. 22–26.
 685 doi:10.1109/IS.2016.7737445.
 URL <http://ieeexplore.ieee.org/abstract/document/7737445/>
- [21] A. Skrynnik, A. Petrov, A. I. Panov, Hierarchical Temporal Memory Implementation with Explicit States Extraction, in: A. V. Samsonovich, V. V. Klimov, G. V. Rybina (Eds.), Biologically Inspired Cognitive Architectures (BICA) for Young Scientists, Advances in Intelligent Systems and Computing, Springer International Publishing, 2016, pp. 219–225.
 690 doi:10.1007/978-3-319-32554-5_28.
 URL http://link.springer.com/10.1007/978-3-319-32554-5_{_}28
- [22] G. S. Osipov, A. I. Panov, N. V. Chudova, Behavior Control as a Function of Consciousness. II. Synthesis of a Behavior Plan, Journal of Computer and Systems Sciences International 54 (6) (2015) 882–896.
 695 doi:10.1134/S106423071505010X.
 URL <http://link.springer.com/article/10.1134/S106423071505010X>
- [23] S. O. Kuznetsov, S. A. Ob”edkov, Comparing Performance of Algorithms for Generating Concept Lattices, in: ICCS’01 International Workshop on Concept Lattices-based KDD, 2001, pp. 35–47.
 700
- [24] S. O. Kuznetsov, Mathematical aspects of concept analysis, Journal of Mathematical Sciences 80 (2) (1996) 1654–1698.
 705 URL <http://link.springer.com/article/10.1007/BF02362847>
- [25] G. S. Osipov, Formulation of subject domain models. 1. Heterogeneous semantic nets, Soviet Journal of Computer and Systems Sciences 30 (2) (1990) 1–12.
- [26] A. I. Panov, Behavior Planning of Intelligent Agent with Sign World Model, Biologically Inspired Cognitive Architectures 19 (2017) (In Press).
 710

doi:10.1016/j.bica.2016.12.001.

URL <http://www.sciencedirect.com/science/article/pii/S2212683X16300913>

[27] L. S. Vygotsky, Thought and Language, MIT Press, 1986.

715 [28] G. A. Asmolov, A. G. Asmolov, From We-Media to I-Media: Identity Transformations in the Virtual World, Psychology in Russia: State of Art 5 (1) (2009) 101. doi:10.11621/pir.2009.0006.
URL <http://psychologyinrussia.com/volumes/index.php?article=1480>