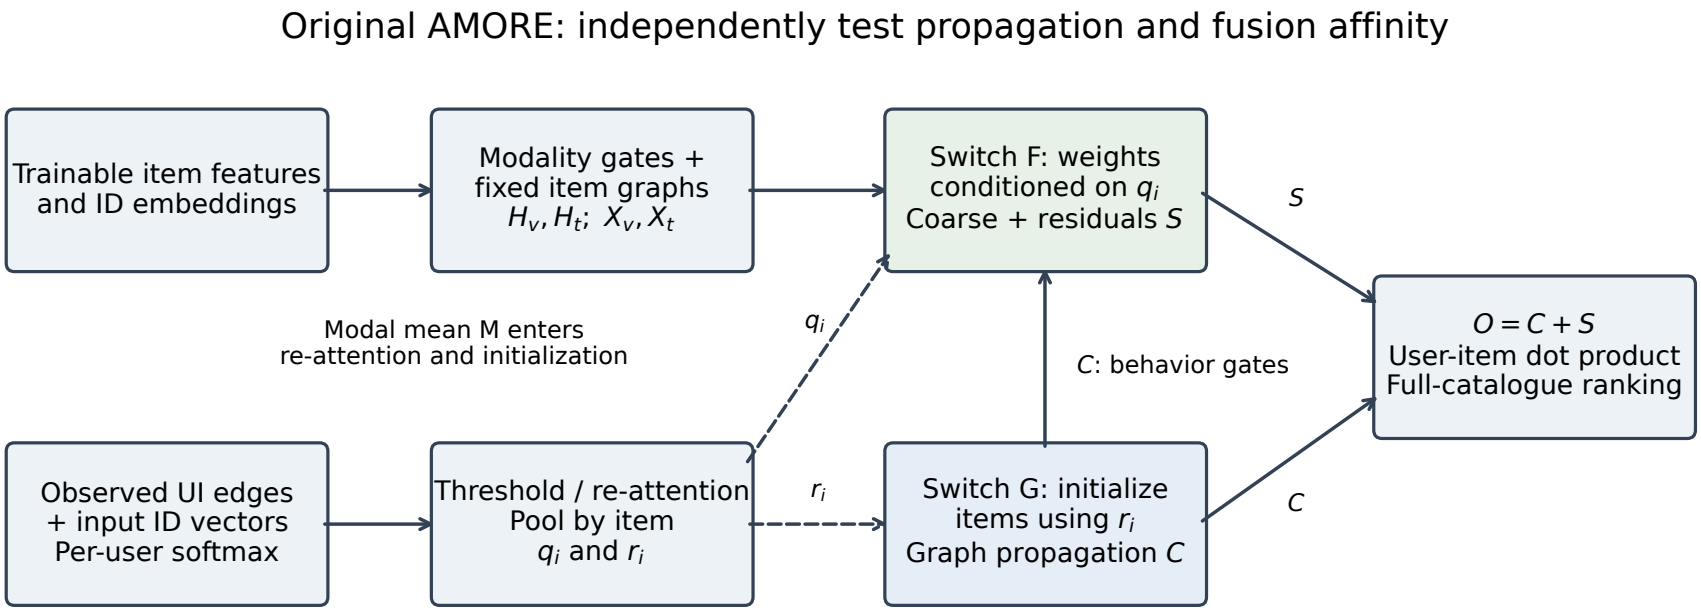
Original AMORE: independently test propagation and fusion affinity
Trainable item features and ID embeddings
Modality gates + fixed item graphs $H_v, H_t;\ X_v, X_t$
Switch F: weights conditioned on q_i Coarse + residuals S
S
$O = C + S$ User-item dot product Full-catalogue ranking
Modal mean M enters re-attention and initialization
q_i
C: behavior gates
Observed UI edges + input ID vectors Per-user softmax
Threshold / re-attention Pool by item q_i and r_i
r_i
Switch G: initialize items using r_i Graph propagation C
C
Training adds extended views, contrastive objectives, scalar moments and representation penalties.
G/F = 00, 10, 01, 11. Dashed arrows denote the two controlled uses of pooled affinity.