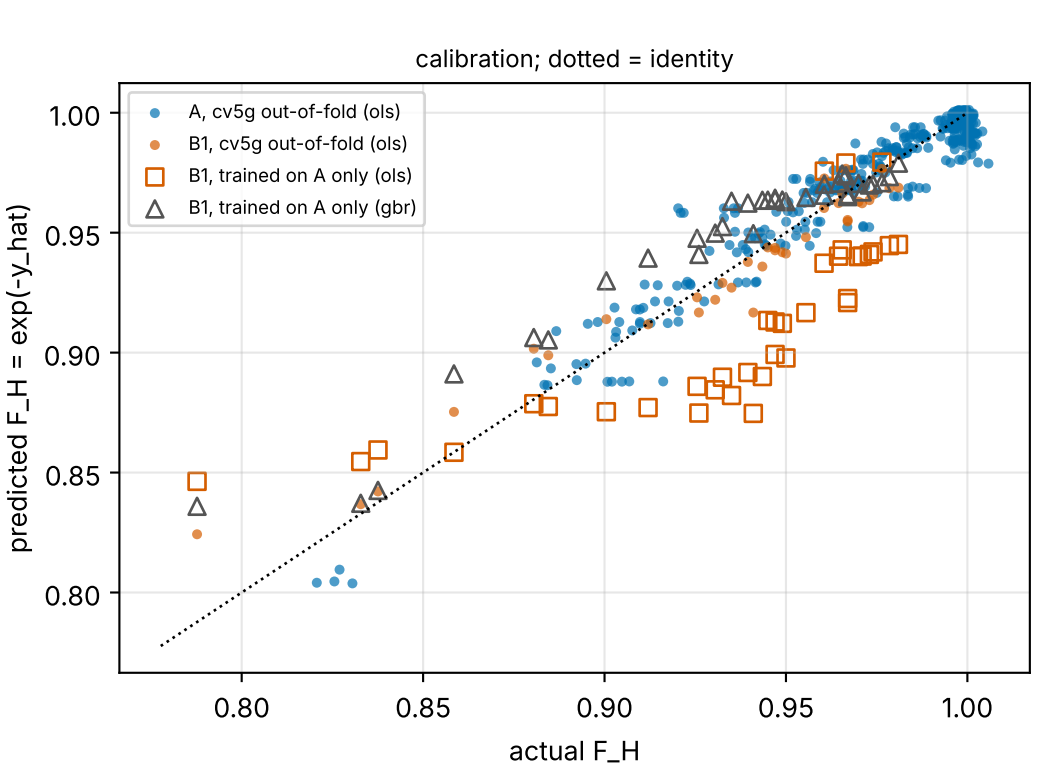
calibration; dotted = identity
A, cv5g out-of-fold (ols)
B1, cv5g out-of-fold (ols)
B1, trained on A only (ols)
B1, trained on A only (gbr)
predicted F_H = exp(-y_hat)
actual F_H
1.00
0.95
0.90
0.85
0.80
0.80
0.85
0.90
0.95
1.00

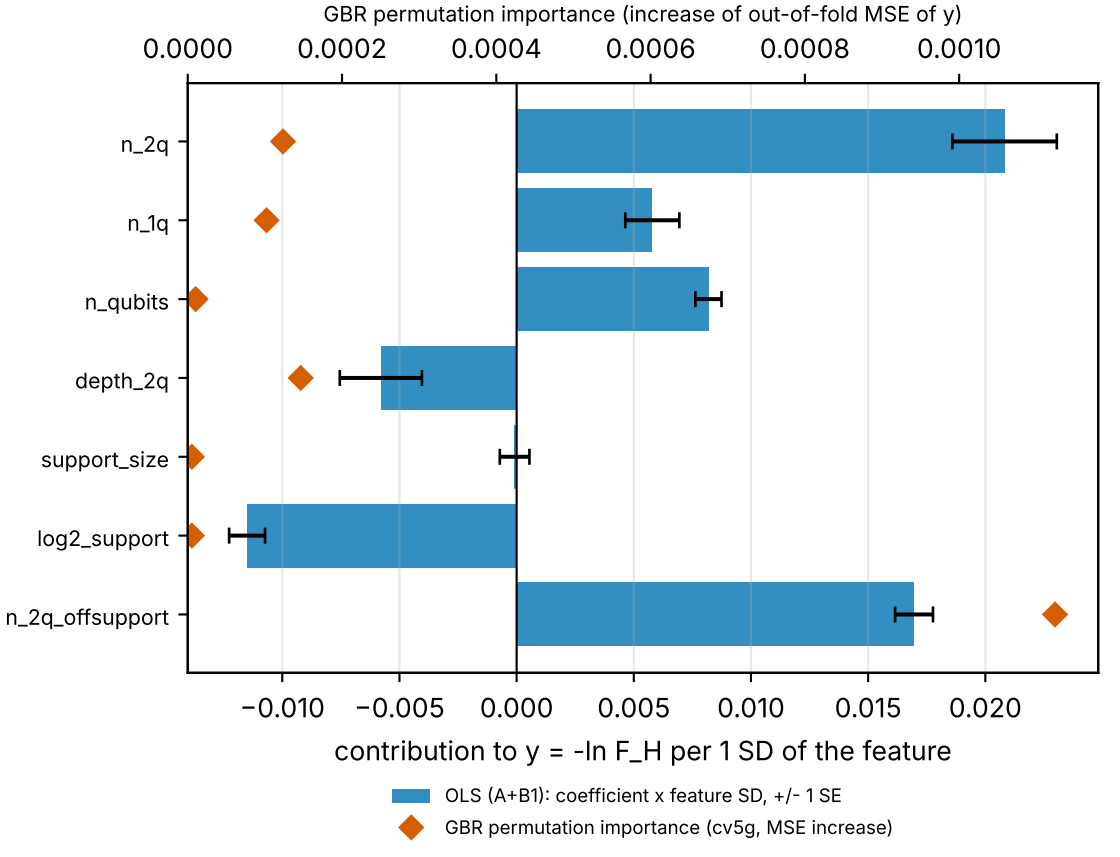
GBR permutation importance (increase of out-of-fold MSE of y)
0.0000
0.0002
0.0004
0.0006
0.0008
0.0010
n_2q
n_1q
n_qubits
depth_2q
support_size
log2_support
n_2q_offsupport
−0.010
−0.005
0.000
0.005
0.010
0.015
0.020
contribution to y = -ln F_H per 1 SD of the feature
OLS (A+B1): coefficient x feature SD, +/- 1 SE
GBR permutation importance (cv5g, MSE increase)