

CS 224N: Assignment 5: Self-Attention, Transformers, and Pretraining

Note. Here are some things to keep in mind as you plan your time for this assignment.

- There are math questions again!
- The total amount of PyTorch code to write, and code complexity, of this assignment is lower than Assignment 4. However, you're also given less guidance or scaffolding in how to write the code.
- This assignment involves a pretraining step that takes approximately 2 hours to perform on Azure, and you'll have to do it twice.

This assignment is an investigation into Transformer self-attention building blocks, and the effects of pretraining. It covers mathematical properties of Transformers and self-attention through written questions. Further, you'll get experience with practical system-building through repurposing an existing codebase. The assignment is split into a written (mathematical) part and a coding part, with its own written questions. Here's a quick summary:

1. **Mathematical exploration:** What kinds of operations can self-attention easily implement? Why should we use fancier things like multi-headed self-attention? This section will use some mathematical investigations to illuminate a few of the motivations of self-attention and Transformer networks. **Note:** for all questions, you should justify your answer with mathematical reasoning when required.
2. **Extending a research codebase:** In this portion of the assignment, you'll get some experience and intuition for a cutting-edge research topic in NLP: teaching NLP models facts about the world through pretraining, and accessing that knowledge through finetuning. You'll train a Transformer model to attempt to answer simple questions of the form "Where was person [x] born?" – without providing any input text from which to draw the answer. You'll find that models are able to learn some facts about where people were born through pretraining, and access that information during fine-tuning to answer the questions.

Then, you'll take a harder look at the system you built, and reason about the implications and concerns about relying on such implicit pretrained knowledge.

This assignment was originally created by John Hewitt, CS 224N Head TA in Winter 2021.

1. Attention exploration (22 points)

Multi-headed self-attention is the core modeling component of Transformers. In this question, we'll get some practice working with the self-attention equations, and motivate why multi-headed self-attention can be preferable to single-headed self-attention.

Recall that attention can be viewed as an operation on a *query* $q \in \mathbb{R}^d$, a set of *value* vectors $\{v_1, \dots, v_n\}$, $v_i \in \mathbb{R}^d$, and a set of *key* vectors $\{k_1, \dots, k_n\}$, $k_i \in \mathbb{R}^d$, specified as follows:

$$c = \sum_{i=1}^n v_i \alpha_i \quad (1)$$

$$\alpha_i = \frac{\exp(k_i^\top q)}{\sum_{j=1}^n \exp(k_j^\top q)} \quad (2)$$

with α_i termed the “attention weights”. Observe that the output $c \in \mathbb{R}^d$ is an average over the value vectors weighted with respect to α_i .

- (a) (4 points) **Copying in attention.** One advantage of attention is that it's particularly easy to “copy” a value vector to the output c . In this problem, we'll motivate why this is the case.
- i. (1 point) **Explain** why α can be interpreted as a categorical probability distribution.

Answer. The *key* vectors correspond to n possible **discrete** categories. Since $\alpha_i = \frac{\exp(k_i^\top q)}{\sum_{j=1}^n \exp(k_j^\top q)}$, $0 \leq \alpha_i \leq 1$ must hold. In addition, $\sum_{i=1}^n \alpha_i = 1$. Therefore, α can be interpreted as a categorical probability distribution.

- ii. (2 points) The distribution α is typically relatively “diffuse”; the probability mass is spread out between many different α_i . However, this is not always the case. **Describe** (in one sentence) under what conditions the categorical distribution α puts almost all of its weight on some α_j , where $j \in \{1, \dots, n\}$ (i.e. $\alpha_j \gg \sum_{i \neq j} \alpha_i$). What must be true about the query q and/or the keys $\{k_1, \dots, k_n\}$?

Answer. $k_j^\top q \gg k_i^\top q$ must hold for any i , where $i \in \{1, \dots, n\} \wedge i \neq j$.

- iii. (1 point) Under the conditions you gave in (ii), **describe** what properties the output c might have.

Answer. $c \approx v_j$, where $\alpha_j \gg \sum_{i \neq j} \alpha_i$.

- iv. (1 point) **Explain** (in two sentences or fewer) what your answer to (ii) and (iii) means intuitively.

Answer. If the *query* q is very similar to a single *key* vector and almost orthogonal to the rest of them, the attention output c could be almost identical to the corresponding *value* vector of this *key* vector, as if “copied” directly.

- (b) (7 points) **An average of two.** Instead of focusing on just one vector v_j , a Transformer model might want to incorporate information from *multiple* source vectors. Consider the case where we instead want to incorporate information from **two** vectors v_a and v_b , with corresponding key vectors k_a and k_b .

- i. (3 points) How should we combine two d -dimensional vectors v_a, v_b into one output vector c in a way that preserves information from both vectors? In machine learning, one common way to do so is to take the average: $c = \frac{1}{2}(v_a + v_b)$. It might seem hard to extract information about the original vectors v_a and v_b from the resulting c , but under certain conditions one can do so. In this problem, we'll see why this is the case.

Suppose that although we don't know v_a or v_b , we do know that v_a lies in a subspace A formed by the m basis vectors $\{a_1, a_2, \dots, a_m\}$, while v_b lies in a subspace B formed by the p basis vectors $\{b_1, b_2, \dots, b_p\}$. (This means that any v_a can be expressed as a linear combination of its basis vectors, as can v_b . All basis vectors have norm 1 and orthogonal to each other.) Additionally, suppose that the two subspaces are orthogonal; i.e. $a_j^\top b_k = 0$ for all j, k .

Using the basis vectors $\{a_1, a_2, \dots, a_m\}$, construct a matrix M such that for arbitrary vectors $v_a \in A$ and $v_b \in B$, we can use M to extract v_a from the sum vector $s = v_a + v_b$. In other words, we want to construct M such that for any v_a, v_b , $Ms = v_a$.

Note: both M and v_a, v_b should be expressed as a vector in \mathbb{R}^d , not in terms of vectors from A and B .

Hint: Given that the vectors $\{a_1, a_2, \dots, a_m\}$ are both *orthogonal* and *form a basis* for v_a , we know that there exist some c_1, c_2, \dots, c_m such that $v_a = c_1 a_1 + c_2 a_2 + \dots + c_m a_m$. Can you create a vector of these weights c ?

Answer.

We have $a_j^\top v_a = c_1 a_j^\top a_1 + \dots + c_j a_j^\top a_j + \dots + c_m a_j^\top a_m = c_j$ and $a_j^\top v_b = d_1 a_j^\top b_1 + \dots + d_m a_j^\top b_p = 0$, where $1 \leq j \leq m$. Let $M = \begin{bmatrix} a_1^\top \\ \vdots \\ a_m^\top \end{bmatrix}$, we have $Ms = M(v_a + v_b) = v_a$.

- ii. (4 points) As before, let v_a and v_b be two value vectors corresponding to key vectors k_a and k_b , respectively. Assume that (1) all key vectors are orthogonal, so $k_i^\top k_j = 0$ for all $i \neq j$; and (2) all key vectors have norm 1.¹ **Find an expression** for a query vector q such that $c \approx \frac{1}{2}(v_a + v_b)$.²

Answer.

We want $\alpha_1 \approx \alpha_2 \approx \frac{1}{2}$, so the attention scores $k_a^\top q$ and $k_b^\top q$ must be close and their sum must be dominating. So $q = \beta(k_a + k_b)$, where $\beta \gg 0$ (large scalar multiple).

- (c) (5 points) **Drawbacks of single-headed attention:** In the previous part, we saw how it was *possible* for a single-headed attention to focus equally on two values. The same concept could easily be extended to any subset of values. In this question we'll see why it's not a *practical* solution. Consider a set of key vectors $\{k_1, \dots, k_n\}$ that are now randomly sampled, $k_i \sim \mathcal{N}(\mu_i, \Sigma_i)$, where the means $\mu_i \in \mathbb{R}^d$ are known to you, but the covariances Σ_i are unknown. Further, assume that the means μ_i are all perpendicular; $\mu_i^\top \mu_j = 0$ if $i \neq j$, and unit norm, $\|\mu_i\| = 1$.

- i. (2 points) Assume that the covariance matrices are $\Sigma_i = \alpha I \forall i \in \{1, 2, \dots, n\}$, for vanishingly small α . Design a query q in terms of the μ_i such that as before, $c \approx \frac{1}{2}(v_a + v_b)$, and provide a brief argument as to why it works.

¹Recall that a vector x has norm 1 iff $x^\top x = 1$.

²Hint: while the softmax function will never *exactly* average the two vectors, you can get close by using a large scalar multiple in the expression.

Answer. It is obvious that $k_i \approx \mu_i$ here since α is *vanishingly small*. So $q = \beta(k_a + k_b)$, where $\beta \gg 0$.

- ii. (3 points) Though single-headed attention is resistant to small perturbations in the keys, some types of larger perturbations may pose a bigger issue. Specifically, in some cases, one key vector k_a may be larger or smaller in norm than the others, while still pointing in the same direction as μ_a . As an example, let us consider a covariance for item a as $\Sigma_a = \alpha I + \frac{1}{2}(\mu_a \mu_a^\top)$ for vanishingly small α (as shown in figure 1). This causes k_a to point in roughly the same direction as μ_a , but with large variances in magnitude. Further, let $\Sigma_i = \alpha I$ for all $i \neq a$.

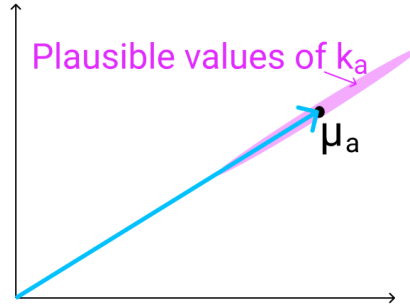


Figure 1: The vector μ_a (shown here in 2D as an example), with the range of possible values of k_a shown in red. As mentioned previously, k_a points in roughly the same direction as μ_a , but may have larger or smaller magnitude.

When you sample $\{k_1, \dots, k_n\}$ multiple times, and use the q vector that you defined in part i., what qualitatively do you expect the vector c will look like for different samples?

Answer.

Since α is vanishingly small, we may **assume** $k_a \approx \gamma \mu_a$, where $\gamma \sim \mathcal{N}(1, \frac{1}{2})$. Also, $k_i^\top q \approx 0$ still holds for $i \notin \{a, b\}$, and $k_b^\top q = \beta \gg 0$. Therefore,

$$\begin{aligned} c &\approx \frac{\exp(\gamma\beta)}{\exp(\gamma\beta) + \exp(\beta)} v_a + \frac{\exp(\beta)}{\exp(\gamma\beta) + \exp(\beta)} v_b \\ &= \frac{1}{\exp((1-\gamma)\beta) + 1} v_a + \frac{1}{\exp((\gamma-1)\beta) + 1} v_b \end{aligned}$$

So c will oscillates between v_a and v_b as we sample k_i multiple times.

- (d) (3 points) **Benefits of multi-headed attention:** Now we'll see some of the power of multi-headed attention. We'll consider a simple version of multi-headed attention which is identical to single-headed self-attention as we've presented it in this homework, except two query vectors (q_1 and q_2) are defined, which leads to a pair of vectors (c_1 and c_2), each the output of single-headed attention given its respective query vector. The final output of the multi-headed attention is their average, $\frac{1}{2}(c_1 + c_2)$. As in question 1(c), consider a set of key vectors $\{k_1, \dots, k_n\}$ that are randomly sampled, $k_i \sim \mathcal{N}(\mu_i, \Sigma_i)$, where the means μ_i are known to you, but the covariances Σ_i are unknown. Also as before, assume that the means μ_i are mutually orthogonal; $\mu_i^\top \mu_j = 0$ if $i \neq j$, and unit norm, $\|\mu_i\| = 1$.

- i. (1 point) Assume that the covariance matrices are $\Sigma_i = \alpha I$, for vanishingly small α . Design q_1 and q_2 such that c is approximately equal to $\frac{1}{2}(v_a + v_b)$.

Answer. Since α is vanishingly small, $k_i \approx \mu_i$. So $q_1 = q_2 = \beta(k_a + k_b)$, where $\beta \gg 0$.

- ii. (2 points) Assume that the covariance matrices are $\Sigma_a = \alpha I + \frac{1}{2}(\mu_a \mu_a^\top)$ for vanishingly small α , and $\Sigma_i = \alpha I$ for all $i \neq a$. Take the query vectors q_1 and q_2 that you designed in part i. What, qualitatively, do you expect the output c to look like across different samples of the key vectors? Please briefly explain why. You can ignore cases in which $k_a^\top q_i < 0$.

Answer. Since α is vanishingly small, we may assume $k_a \approx \gamma \mu_a$, where $\gamma \sim \mathcal{N}(1, \frac{1}{2})$. Also, $k_j^\top q_i \approx 0$ still holds for $i \in \{1, 2\}$ and $j \notin \{a, b\}$, and $k_b^\top q_i = \beta \gg 0$. Therefore,

$$\begin{aligned} c &\approx \frac{\exp(\gamma\beta)}{\exp(\gamma\beta) + \exp(\beta)} v_a + \frac{\exp(\beta)}{\exp(\gamma\beta) + \exp(\beta)} v_b \\ &= \frac{1}{\exp((1-\gamma)\beta) + 1} v_a + \frac{1}{\exp((\gamma-1)\beta) + 1} v_b \end{aligned}$$

As we now have a c for each attention head, it is equivalent to move γ close to its expectation, which is 1. So c will approach $\frac{1}{2}(v_a + v_b)$ as we increase the number of attention heads.

hyperref

2. Pretrained Transformer models and knowledge access (35 points)

You'll train a Transformer to perform a task that involves accessing knowledge about the world – knowledge which isn't provided via the task's training data (at least if you want to generalize outside the training set). You'll find that it more or less fails entirely at the task. You'll then learn how to pretrain that Transformer on Wikipedia text that contains world knowledge, and find that finetuning that Transformer on the same knowledge-intensive task enables the model to access some of the knowledge learned at pretraining time. You'll find that this enables models to perform considerably above chance on a held out development set.

The code you're provided with is a fork of Andrej Karpathy's [minGPT](#). It's nicer than most research code in that it's relatively simple and transparent. The "GPT" in minGPT refers to the Transformer language model of OpenAI, originally described in [this paper](#) [?].

As in previous assignments, you will want to develop on your machine locally, then run training on Azure. You can use the same conda environment from previous assignments for local development, and the same process for training on Azure (see the [CS224n Azure Guide](#) for a refresher). Specifically, you'll still be running "conda activate py37_pytorch" on the Azure machine. You'll need around 5 hours for training, so budget your time accordingly!

Your work with this codebase is as follows:

- (a) (0 points) **Check out the demo.**

In the mingpt-demo/ folder is a Jupyter notebook that trains and samples from a Transformer language model. Take a look at it (locally on your computer) to get somewhat familiar with how it defines and trains models. Some of the code you're writing below will be inspired by what you see in this notebook.

Note that you do not have to write any code or submit written answers for this part.

- (b) (0 points) **Read through NameDataset, our dataset for reading name-birthplace pairs.**

The task we'll be working on with our pretrained models is attempting to access the birth place of a notable person, as written in their Wikipedia page. We'll think of this as a particularly simple form of question answering:

Q: Where was [person] born?

A: [place]

From now on, you'll be working with the `src/` folder. **The code in `mingpt-demo/` won't be changed or evaluated for this assignment.** In `dataset.py`, you'll find the the class `NameDataset`, which reads a TSV (tab-separated values) file of name/place pairs and produces examples of the above form that we can feed to our Transformer model.

To get a sense of the examples we'll be working with, if you run the following code, it'll load your `NameDataset` on the training set `birth_places_train.tsv` and print out a few examples.

```
python src/dataset.py namedata
```

Note that you do not have to write any code or submit written answers for this part.

(c) (0 points) **Implement finetuning (without pretraining).**

Take a look at `run.py`. It has some skeleton code specifying flags you'll eventually need to handle as command line arguments. In particular, you might want to *pretrain*, *finetune*, or *evaluate* a model with this code. For now, we'll focus on the finetuning function, in the case without pretraining.

Taking inspiration from the training code in the `play_char.ipynb` file, write code to finetune a Transformer model on the name/birthplace dataset, via examples from the `NameDataset` class. For now, implement the case without pretraining (i.e. create a model from scratch and train it on the birthplace prediction task from part (b)). You'll have to modify two sections, marked [part c] in the code: one to initialize the model, and one to finetune it. Note that you only need to initialize the model in the case labeled "vanilla" for now (later in section (g), we will explore a model variant). Use the hyperparameters for the Trainer specified in the `run.py` code.

Also take a look at the *evaluation* code which has been implemented for you. It samples predictions from the trained model and calls `evaluate_places()` to get the total percentage of correct place predictions. You will run this code in part (d) to evaluate your trained models.

This is an intermediate step for later portions, including Part d, which contains commands you can run to check your implementation. No written answer is required for this part.

(d) (5 points) **Make predictions (without pretraining).**

Train your model on `wiki.txt`, and evaluate on `birth_dev.tsv`. Specifically, you should now be able to run the following three commands:

```
# Train on the names dataset
python src/run.py finetune vanilla wiki.txt \
    --writing_params_path vanilla.model.params \
    --finetune_corpus_path birth_places_train.tsv

# Evaluate on the dev set, writing out predictions
python src/run.py evaluate vanilla wiki.txt \
    --reading_params_path vanilla.model.params \
    --eval_corpus_path birth_dev.tsv \
    --outputs_path vanilla.nopretrain.dev.predictions

# Evaluate on the test set, writing out predictions
python src/run.py evaluate vanilla wiki.txt \
    --reading_params_path vanilla.model.params \
    --eval_corpus_path birth_test_inputs.tsv \
    --outputs_path vanilla.nopretrain.test.predictions
```

Training will take less than 10 minutes (on Azure). Report your model's accuracy on the dev set (as printed by the second command above). Don't be surprised if it is well below 10%; we will be

digging into why in Part 3. As a reference point, we want to also calculate the accuracy the model would have achieved if it had just predicted “London” as the birth place for everyone in the dev set. Fill in `london_baseline.py` to calculate the accuracy of that approach and report your result in your write-up. You should be able to leverage existing code such that the file is only a few lines long.

Answer.

Accuracy: 1.2% (6.0 out of 500.0)

Accuracy with “London”: 5.0% (25.0 out of 500.0)

(e) (10 points) **Define a *span corruption* function for pretraining.**

In the file `src/dataset.py`, implement the `__getitem__()` function for the dataset class `CharCorruptionDataset`. Follow the instructions provided in the comments in `dataset.py`. Span corruption is explored in the [T5 paper](#) [?]. It randomly selects spans of text in a document and replaces them with unique tokens (noising). Models take this noised text, and are required to output a pattern of each unique sentinel followed by the tokens that were replaced by that sentinel in the input. In this question, you’ll implement a simplification that only masks out a single sequence of characters.

This question will be graded via autograder based on whether your span corruption function implements some basic properties of our spec. We’ll instantiate the `CharCorruptionDataset` with our own data, and draw examples from it.

To help you debug, if you run the following code, it’ll sample a few examples from your `CharCorruptionDataset` on the pretraining dataset `wiki.txt` and print them out for you.

```
python src/dataset.py charcorruption
```

No written answer is required for this part.

(f) (10 points) **Pretrain, finetune, and make predictions. Budget 2 hours for training.**

Now fill in the *pretrain* portion of `run.py`, which will pretrain a model on the span corruption task. Additionally, modify your *finetune* portion to handle finetuning in the case *with* pretraining. In particular, if a path to a pretrained model is provided in the bash command, load this model before finetuning it on the birthplace prediction task. Pretrain your model on `wiki.txt` (which should take approximately two hours), finetune it on `NameDataset` and evaluate it. Specifically, you should be able to run the following four commands: (Don’t be concerned if the loss appears to plateau in the middle of pretraining; it will eventually go back down.)

```
# Pretrain the model
python src/run.py pretrain vanilla wiki.txt \
    --writing_params_path vanilla.pretrain.params

# Finetune the model
python src/run.py finetune vanilla wiki.txt \
    --reading_params_path vanilla.pretrain.params \
    --writing_params_path vanilla.finetune.params \
    --finetune_corpus_path birth_places_train.tsv

# Evaluate on the dev set; write to disk
python src/run.py evaluate vanilla wiki.txt \
    --reading_params_path vanilla.finetune.params \
    --eval_corpus_path birth_dev.tsv \
    --outputs_path vanilla.pretrain.dev.predictions
```

```
# Evaluate on the test set; write to disk
python src/run.py evaluate vanilla wiki.txt \
    --reading_params_path vanilla.finetune.params \
    --eval_corpus_path birth_test_inputs.tsv \
    --outputs_path vanilla.pretrain.test.predictions
```

Report the accuracy on the dev set (printed by the third command above). We expect the dev accuracy will be at least 10%, and will expect a similar accuracy on the held out test set.

Answer. Accuracy: 26.6% (133.0 out of 500.0)

- (g) (10 points) **Research! Write and try out the *synthesizer* variant (Budget 2 hours for pretraining!)**

We'll now go to changing the Transformer architecture itself – specifically, the self-attention module. While we've been using a self-attention scoring function based on dot products, this involves a rather intensive computation that's quadratic in the sequence length. This is because the dot product between ℓ^2 pairs of word vectors is computed in each computation. *Synthesized attention* [?] is a very recent alternative that has potential benefits by removing this dot product (and quadratic computation) entirely. It's a promising idea, and one way for us to ask, "What's important/right about the Transformer architecture, and where can we improve/prune aspects of it?" In `attention.py`, implement the `forward()` method of `SynthesizerAttention`, which implements a variant of the Synthesizer proposed in the cited paper.

The provided `CausalSelfAttention` implements the following attention for each head of the multi-headed attention: Let $X \in \mathbb{R}^{\ell \times d}$ (where ℓ is the block size and d is the total dimensionality, d/h is the dimensionality per head.).³ Let $Q, K, V \in \mathbb{R}^{d \times d/h}$. Then the output of the self-attention head is

$$Y_i = \text{softmax}\left(\frac{(XQ_i)(XK_i)^\top}{\sqrt{d/h}}\right)(XV_i) \quad (3)$$

where $Y_i \in \mathbb{R}^{\ell \times d/h}$. Then the output of the self-attention is a linear transformation of the concatenation of the heads:

$$Y = [Y_1; \dots; Y_h]A \quad (4)$$

where $A \in \mathbb{R}^{d \times d}$ and $[Y_1; \dots; Y_h] \in \mathbb{R}^{\ell \times d}$. The code also includes dropout layers which we haven't written here. We suggest looking at the provided code and noting how this equation is implemented in PyTorch.

Your job is to implement the following variant of attention. Instead of Equation 3, implement the following in `SynthesizerAttention`:

$$Y_i = \text{softmax}(\text{ReLU}(XA_i + b_1)B_i + b_2)(XV_i), \quad (5)$$

where $A_i \in \mathbb{R}^{d \times d/h}$, $B_i \in \mathbb{R}^{d/h \times \ell}$, and $V_i \in \mathbb{R}^{d \times d/h}$.⁴ One way to interpret this is as follows: The term $(XQ_i)(XK_i)^\top$ is an $\ell \times \ell$ matrix of attention scores, computed as all pairs of dot products between word embeddings. The synthesizer variant eschews the all-pairs dot product and directly computes the $\ell \times \ell$ matrix of attention scores by mapping each d -dimensional vector of each head for X to an ℓ -dimensional vector of unnormalized attention weights.

In the rest of the code in the `src/` folder, modify your model to support using either `CausalSelfAttention` or `SynthesizerAttention`. Add the ability to switch between these attention variants depending on whether "vanilla" (for causal self-attention) or "synthesizer" (for the synthesizer variant) is selected in the command line arguments (see the section marked [part g] in `src/run.py`). You are free to implement this functionality in any way you choose, so long as it supports these command line arguments.

Below are bash commands that your code should support in order to pretrain the model, finetune it, and make predictions on the dev and test sets. Note that the pretraining process will take approximately 2 hours.

```
# Pretrain the model
python src/run.py pretrain synthesizer wiki.txt \
    --writing_params_path synthesizer.pretrain.params
```

³Note that these dimensionalities do not include the minibatch dimension.

⁴Hint: copy over the `CausalSelfAttention` class, and modify it minimally for this.

```
# Finetune the model
python src/run.py finetune synthesizer wiki.txt \
    --reading_params_path synthesizer.pretrain.params \
    --writing_params_path synthesizer.finetune.params \
    --finetune_corpus_path birth_places_train.tsv

# Evaluate on the dev set; write to disk
python src/run.py evaluate synthesizer wiki.txt \
    --reading_params_path synthesizer.finetune.params \
    --eval_corpus_path birth_dev.tsv \
    --outputs_path synthesizer.pretrain.dev.predictions

# Evaluate on the test set; write to disk
python src/run.py evaluate synthesizer wiki.txt \
    --reading_params_path synthesizer.finetune.params \
    --eval_corpus_path birth_test_inputs.tsv \
    --outputs_path synthesizer.pretrain.test.predictions
```

Report the accuracy of your synthesizer attention model on birthplace prediction on `birth_dev.tsv` after pretraining and fine-tuning.

- i. (8 points) We'll score your model as to whether it gets at least 5% accuracy on the test set, which has answers held out.
- ii. (2 points) Why might the *synthesizer* self-attention not be able to do, in a single layer, what the key-query-value self-attention can do?

Answer.

- i. Accuracy: 8.0% (40.0 out of 500.0)
- ii. The *synthesizer* may not be able to evaluate the relevance between all pairs of words.

3. Considerations in pretrained knowledge (5 points)

Please type the answers to these written questions (to make TA lives easier).

- (a) (1 point) Succinctly explain why the pretrained (vanilla) model was able to achieve an accuracy of above 10%, whereas the non-pretrained model was not.

Answer. It took much more time and a much larger training set to train the pretrained model. Also, it used a *span corruption* dataset, which required the model to learn the general pattern of the input document.

- (b) (2 points) Take a look at some of the correct predictions of the pretrain+finetuned vanilla model, as well as some of the errors. We think you'll find that it's impossible to tell, just looking at the output, whether the model *retrieved* the correct birth place, or *made up* an incorrect birth place. Consider the implications of this for user-facing systems that involve pretrained NLP components. Come up with two **distinct** reasons why this model behavior (i.e. unable to tell whether it's retrieved or made up) may cause concern for such applications, and an example for each reason.

Answer. This model behavior may cast significant doubt on the overall reliability of the

model output and may therefore mislead users. Also, it may output something immoral and hurt people.

- (c) (2 points) If your model didn't see a person's name at pretraining time, and that person was not seen at fine-tuning time either, it is not possible for it to have "learned" where they lived. Yet, your model will produce *something* as a predicted birth place for that person's name if asked. Concisely describe a strategy your model might take for predicting a birth place for that person's name, and one reason why this should cause concern for the use of such applications. (You do not need to submit the same answer for 3c as for 3b.)

Answer. The model may pick another person whose name is in some sense *similar* to the unknown person's, and output his/her birth place instead. This kind of outputs are totally wrong and have zero or even negative value in reality.

Submission Instructions

You will submit this assignment on GradeScope as two submissions – one for **Assignment 5 [coding]** and another for **Assignment 5 [written]**:

1. Verify that the following files exist at these specified paths within your assignment directory:
 - The no-pretraining model and predictions: `vanilla.model.params`, `vanilla.nopretrain.dev.predictions`, `vanilla.nopretrain.test.predictions`
 - The pretrain-finetune model and predictions: `vanilla.finetune.params`, `vanilla.pretrain.dev.predictions`, `vanilla.pretrain.test.predictions`
 - The synthesizer model and predictions: `synthesizer.finetune.params`, `synthesizer.pretrain.dev.predictions`, `synthesizer.pretrain.test.predictions`
2. Run the `collect_submission.sh` script to produce your `assignment5.zip` file.
3. Upload your `assignment5.zip` file to GradeScope to **Assignment 5 [coding]**.
4. Check that the public autograder tests passed correctly.
5. Upload your written solutions, for questions 1, parts of 2, and 3, to GradeScope to **Assignment 5 [written]**. Tag it properly!