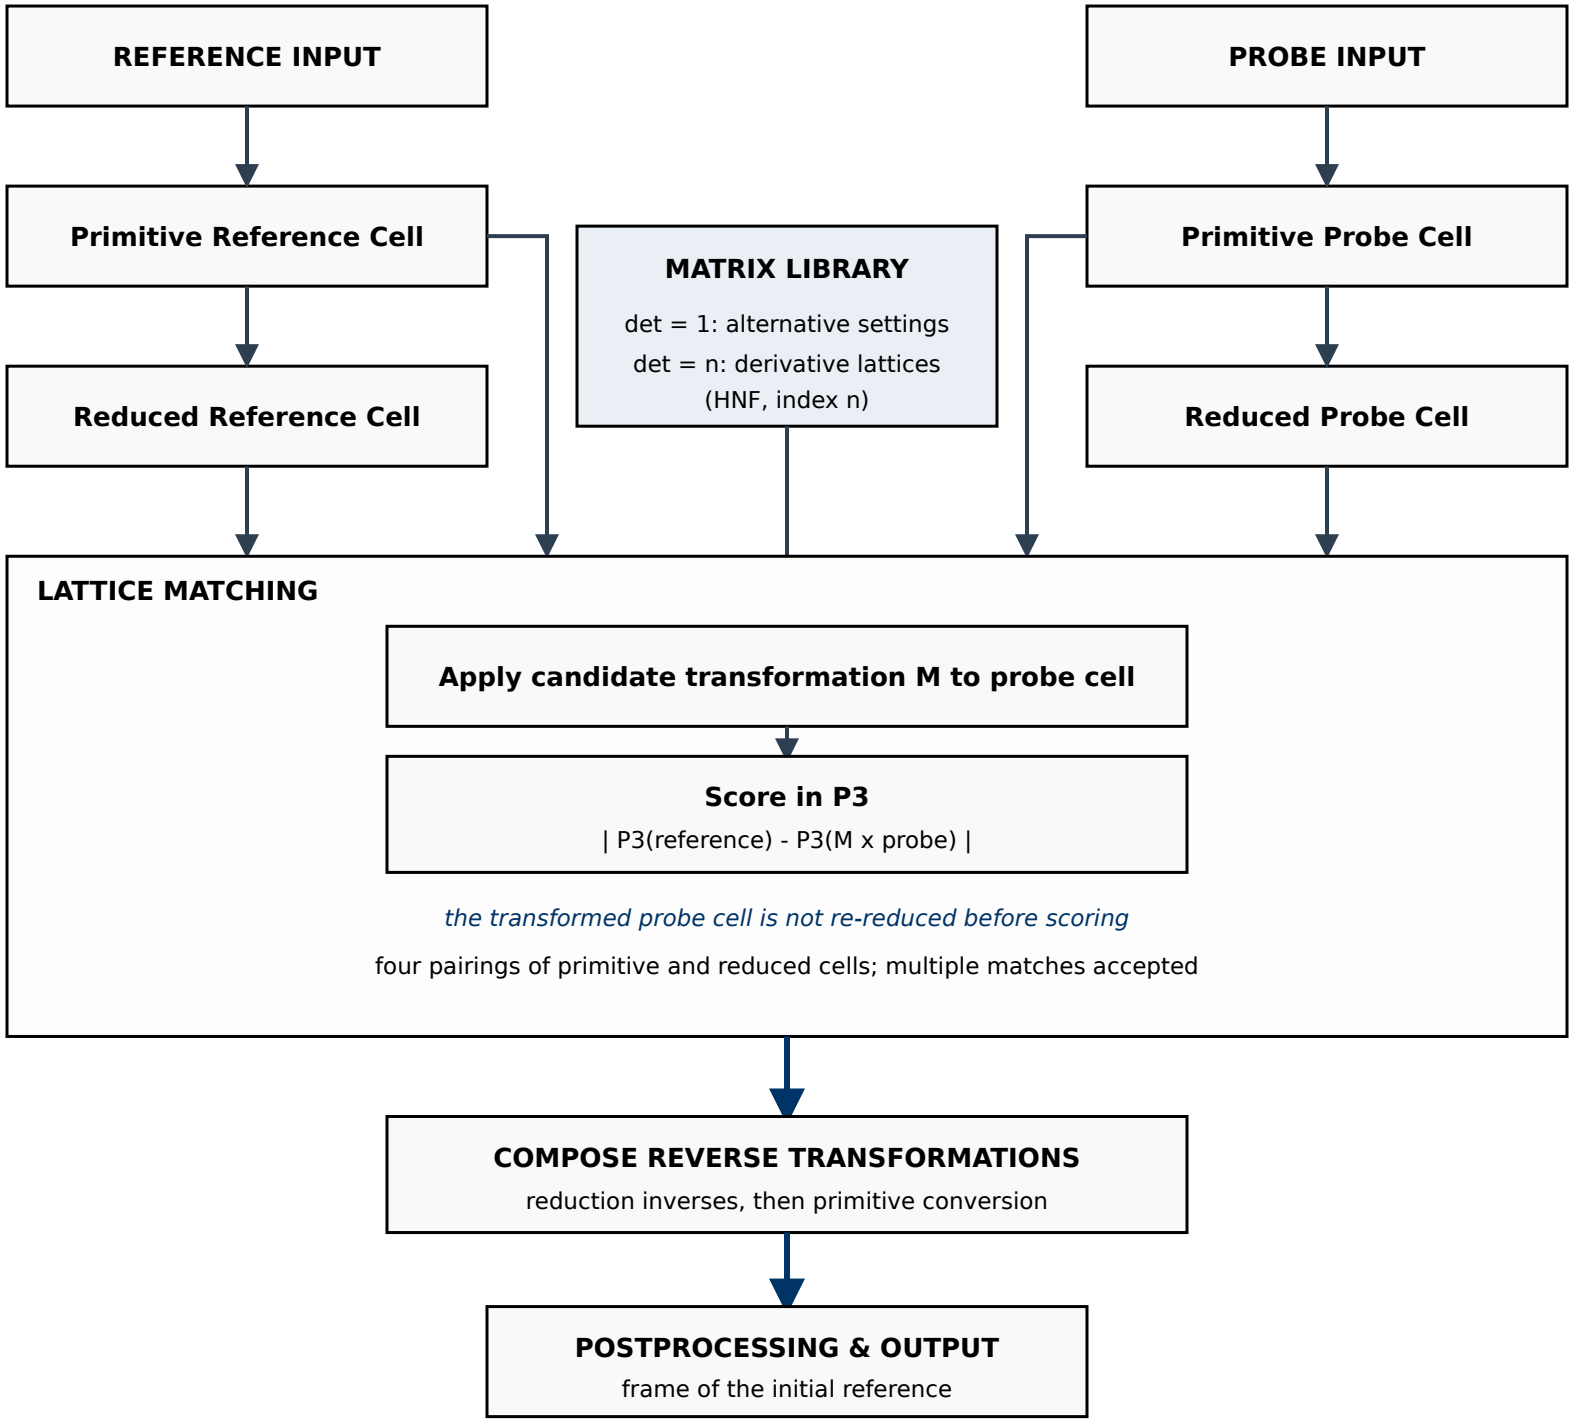
REFERENCE INPUT
PROBE INPUT
Primitive Reference Cell
MATRIX LIBRARY
det = 1: alternative settings
det = n: derivative lattices
(HNF, index n)
Primitive Probe Cell
Reduced Reference Cell
Reduced Probe Cell
LATTICE MATCHING
Apply candidate transformation M to probe cell
Score in P3
| P3(reference) - P3(M x probe) |
the transformed probe cell is not re-reduced before scoring
four pairings of primitive and reduced cells; multiple matches accepted
COMPOSE REVERSE TRANSFORMATIONS
reduction inverses, then primitive conversion
POSTPROCESSING & OUTPUT
frame of the initial reference