




Lab 3

Using MySQL Workbench to create Database, Table, Statements related Database.

Problem 1: Sale management Database

1. Create the following tables in a new database 'SaleManagement':

a) Create a new database with the name " SaleManagement".

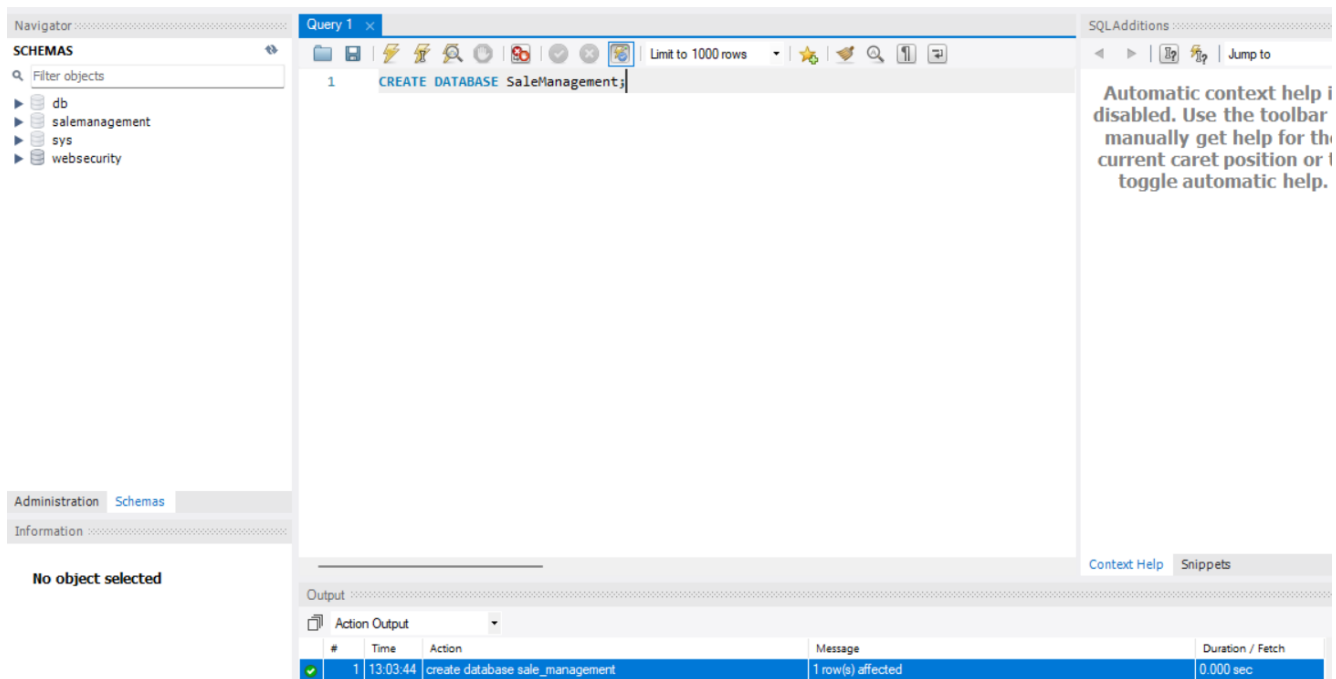

b) Create all the tables under this database.

2. Informations Tables:

a) Table Name: **Clients**

Column Name	Data Type	Size	Constraints	
Client_Number	VARCHAR	10	Primary Key, first letter must start with 'C'	
Client_Name	VARCHAR	25	Not null	

Address	VARCHAR	30		<pre>create table clients(Client_Number varchar(10), Client_Name varchar(25) not null, Address varchar(30), City varchar(30), Pincode int not null, Province char(25), Amount_Paid decimal(15,4), Amount_Due decimal(15,4), check(Client_Number like 'C%'), primary key(Client_Number));</pre>
City	VARCHAR	30		
Pincode	INT		Not null	
Province	CHAR	25		
Amount_Paid	DECIMAL	15,4		
Amount_Due	DECIMAL	15,4		

Automatic context disabled. Use the t manually get help current caret posil toggle automati

#	Time	Action	Message	Duration / F
6	13:06:52	SELECT * FROM websecurity.reguser LIMIT 0, ...	3 row(s) returned	0.000 sec /
7	13:12:43	DROP DATABASE 'sale_management'	0 row(s) affected	0.016 sec
8	13:17:12	CREATE DATABASE SaleManagement	1 row(s) affected	0.000 sec
9	13:18:34	USE SaleManagement	0 row(s) affected	0.000 sec
10	13:26:31	CREATE TABLE clients(Client_Number VARCH...	0 row(s) affected	0.015 sec

a) Table Name: **Product**

Column Name	Data Type	Size	Constraints
Product_Number	VARCHAR	15	Primary Key, first letter must start with 'P'
Product_Name	VARCHAR	25	Not null, Unique
Quantity_On_Hand	INT		Not null

Quantity_Sale	INT		Not null	<pre>create table product(Product_Number varchar(15), Product_Name varchar(25) not null unique, Quantity_On_Hand int not null, Quantity_Sell int not null, Sell_Price decimal(15,4) not null, Cost_Price decimal(15,4) not null, check(Product_Number like 'P%'), check(Cost_Price<>0), primary key(Product_Number));</pre>
Sale_Price	DECIMAL	15,4	Not null	
Cost_Price	DECIMAL	15,4	Not null, cannot be 0	

The screenshot displays the SQL Server Enterprise Manager interface. On the left, the 'SCHEMAS' pane shows the database structure, with 'salemanagement' expanded to show the 'product' table. The 'Columns' pane for the 'product' table lists the following columns and their data types:

Column Name	Data Type	Primary Key
Product_Number	varchar(15)	PK
Product_Name	varchar(25)	
Quantity_On_Hand	int	
Quantity_Sell	int	
Sell_Price	decimal(15,4)	
Cost_Price	decimal(15,4)	

The main pane shows the SQL script for creating the 'product' table. The script is as follows:

```

11      Amount_Due DECIMAL(15,4),
12
13      -- %: đại diện cho 1 chuỗi
14      -- _: đại diện cho 1 ký tự
15      CHECK(Client_Number like 'C%'), -- kiểm tra dữ liệu
16
17      PRIMARY KEY(Client_Number)
18  );
19  CREATE TABLE product(
20      Product_Number VARCHAR(15),
21      Product_Name VARCHAR(25) NOT NULL UNIQUE,
22      Quantity_On_Hand INT NOT NULL,
23      Quantity_Sell INT NOT NULL,
24      Sell_Price DECIMAL(15,4) NOT NULL,
25      Cost_Price DECIMAL(15,4) NOT NULL,
26      CHECK(Product_Number LIKE 'P%'),
27      CHECK(Cost_Price<>0),
28      PRIMARY KEY(Product_Number)
29  );
30

```

The 'Output' pane at the bottom shows the execution results of the SQL script:

#	Time	Action	Message
9	13:18:34	USE SaleManagement	0 row(s) affected
10	13:26:31	CREATE TABLE clients(Client_Number V...	0 row(s) affected
11	13:29:02	SELECT * FROM salemanagement.clients ...	0 row(s) returned
12	13:42:33	CREATE TABLE product(Product_Numbe...	0 row(s) affected
13	13:43:03	SELECT * FROM salemanagement.produc...	0 row(s) returned

b) Table Name: Salesman

Column Name	Data Type	Size	Constraints	<pre> create table Salesman(Salesman_Number varchar(15), Salesman_Name varchar(25) not null, Address varchar(30), City varchar(30), Pincode int not null, Province char(25) default('Viet Nam'), Salary decimal(15,4) not null, Sales_Target int not null, Target_Achieved int, Phone char(10) not null unique, check(Salesman_Number like 'S%'), check(Salary<>0), check(Sales_Target<>0), primary key(Salesman_Number)); </pre>
Salesman_Number	VARCHAR	15	Primary Key, first letter must start with 'S'	
Salesman_Name	VARCHAR	25	Not null	
Address	VARCHAR	30		
City	VARCHAR	30		
Pincode	INT		Not null	
Province	CHAR	25	Default 'Vietnam'	
Salary	DECIMAL	15,4	Not null, cannot be 0	
Sales_Target	INT		Not null, cannot be 0	
Target_Achieved	INT			
Phone	CHAR	10	Not null, Unique,	

SCHEMAS

Filter objects

- db
 - salemanagement
 - Tables
 - clients
 - product
 - salesman**
 - Columns
 - Indexes
 - Foreign Keys
 - Triggers
 - Views
 - Stored Procedures
 - Functions
 - sys
 - websecurity

Administration Schemas

Information

Table: salesman

Columns:

Salesman_Number	varchar(15)
Salesman_Name	varchar(25)
Address	varchar(30)
City	varchar(30)
Pincode	int
Province	char(25)
Salary	decimal(15,4)
Sales_Target	int
Target_Achieved	int
Phone	char(10)

Object Info Session

```

48 Cost_Price DECIMAL(15,4) NOT NULL,
49 CHECK(Product_Number LIKE 'P%'),
50 CHECK(Cost_Price<>0),
51 PRIMARY KEY(Product_Number)
52 );
53
54 CREATE TABLE salesman(
55     Salesman_Number VARCHAR(15),
56     Salesman_Name VARCHAR(25) NOT NULL,
57     Address VARCHAR(30),
58     City VARCHAR(30),
59     Pincode INT NOT NULL,
60     Province CHAR(25) DEFAULT('Viet Nam'),
61     Salary DECIMAL(15,4) NOT NULL,
62     Sales_Target INT NOT NULL,
63     Target_Achieved INT,
64     Phone CHAR(10) NOT NULL UNIQUE,
65     CHECK(Salesman_Number LIKE 'S%'),
66     CHECK(Salary<>0),
67     CHECK(Sales_Target<>0),
68     PRIMARY KEY(Salesman_Number)
69 );

```

Automati disabled. U manually current ca toggle a

Context Help Sr

Output

Action Output

#	Time	Action	Message
17	14:07:59	UPDATE clients SET Address = 'Hoa Phu' WH...	1 row(s) affected Rows matched: 1 Changed: 1...
18	14:08:10	SELECT * FROM clients LIMIT 0, 1000	10 row(s) returned
19	14:08:17	SELECT * FROM salemanagement.product LIM...	0 row(s) returned
20	14:11:54	CREATE TABLE salesman(Salesman_Number ...	0 row(s) affected


c) Table Name: SalesOrder

Column Name	Data Type	Size	Constraints
Order_Number	VARCHAR	15	Primary Key, first letter must start with 'O'
Order_Date	DATE		
Client_Number	VARCHAR	10	Foreign key references Client_Number of Client table, first letter must start with 'C'
Salesman_Number	VARCHAR	15	Foreign key references Salesman_Number of Salesman table, first letter must start with 'S'
Delivery_Status	CHAR	15	Values ('Delivered', 'On Way', 'Ready to Ship')
Delivery_Date	DATE		Cannot be less than Order_date
Order_Status	VARCHAR	15	Values ('In Process', 'Successful', 'Cancelled')

```

create table SalesOrder(
    Order_Number varchar(15),
    Order_Date date,
    Client_Number varchar(15),
    Salesman_Number varchar(15),
    Delivery_Status char(15),
    Delivery_Date date,
    Order_Status varchar(15),
    primary key (Order_Number),
    foreign key (Client_Number) references clients(Client_Number),
    foreign key (Salesman_Number) references salesman(Salesman_Number),
    check (Order_Number like 'O%'),
    check (Client_Number like 'C%'),
    check (Salesman_Number like 'S%'),
    check (Delivery_Status in ('Delivered', 'On Way', 'Ready to Ship')),
    check (Delivery_Date>Order_Date),
    check (Order_Status in ('In Process', 'Successful', 'Cancelled'))
);

```

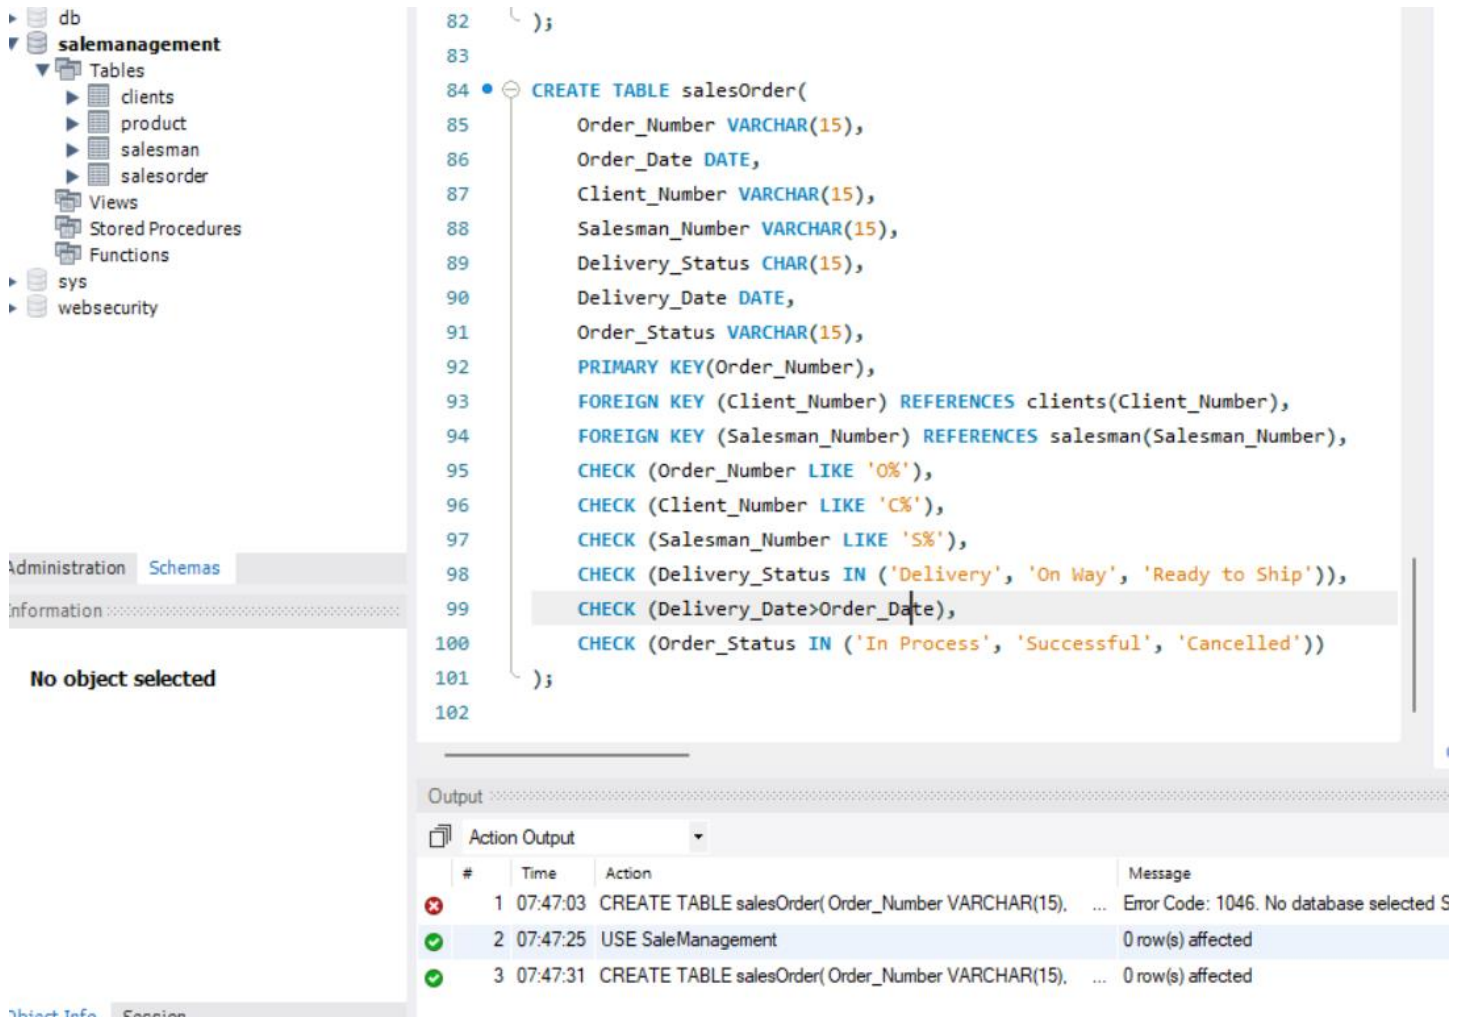

The screenshot displays the SQL Server Enterprise Manager interface. On the left, the 'salemanagement' database is expanded, showing tables like 'clients', 'product', 'salesman', and 'salesorder'. The main pane shows a SQL script for creating a 'salesOrder' table with the following constraints:

```

82 );
83
84 CREATE TABLE salesOrder(
85     Order_Number VARCHAR(15),
86     Order_Date DATE,
87     Client_Number VARCHAR(15),
88     Salesman_Number VARCHAR(15),
89     Delivery_Status CHAR(15),
90     Delivery_Date DATE,
91     Order_Status VARCHAR(15),
92     PRIMARY KEY(Order_Number),
93     FOREIGN KEY (Client_Number) REFERENCES clients(Client_Number),
94     FOREIGN KEY (Salesman_Number) REFERENCES salesman(Salesman_Number),
95     CHECK (Order_Number LIKE 'O%'),
96     CHECK (Client_Number LIKE 'C%'),
97     CHECK (Salesman_Number LIKE 'S%'),
98     CHECK (Delivery_Status IN ('Delivery', 'On Way', 'Ready to Ship')),
99     CHECK (Delivery_Date > Order_Date),
100    CHECK (Order_Status IN ('In Process', 'Successful', 'Cancelled'))
101 );
102

```

The Output pane at the bottom shows the execution results:

#	Time	Action	Message
1	07:47:03	CREATE TABLE salesOrder(Order_Number VARCHAR(15), ...	Error Code: 1046. No database selected S
2	07:47:25	USE SaleManagement	0 row(s) affected
3	07:47:31	CREATE TABLE salesOrder(Order_Number VARCHAR(15), ...	0 row(s) affected

d) Table Name: SalesOrderDetails

Column Name	Data Type	Size	Constraints	
Order_Number	VARCHAR	15	Foreign key references Order_Number of Sales_Order table	<pre> create table SalesOrderDetails(Order_Number varchar(15), Product_Number varchar(15), Order_Quantity int, check (order_number like 'O%'), check (Product_Number like 'P%'), foreign key (Order_Number) references salesorder(Order_Number), foreign key (Product_Number) references product (Product_Number)); </pre>
Product_Number	VARCHAR	15	Foreign key references Product_Number of Product table, first letter must start with 'P'	
Order_Quantity	INT			

```

102
103 • CREATE TABLE salesOrderDetails(
104     Order_Number VARCHAR(15),
105     Product_Number VARCHAR(15),
106     Order_Quantity INT,
107     CHECK (Order_Number LIKE 'O%'),
108     CHECK (Product_Number LIKE 'P%'),
109     FOREIGN KEY (Order_Number) REFERENCES salesOrder(Order_Number),
110     FOREIGN KEY (Product_Number) REFERENCES product(Product_Number)
111 );
112

```

Output					Context Help	Snippets
Action Output						
#	Time	Action	Message	Duration / Fetch		
❌ 1	07:47:03	CREATE TABLE salesOrder(Order_Number VARCHAR(15), ...	Error Code: 1046. No database selected Select the default DB t...	0.000 sec		
✅ 2	07:47:25	USE SaleManagement	0 row(s) affected	0.000 sec		
✅ 3	07:47:31	CREATE TABLE salesOrder(Order_Number VARCHAR(15), ...	0 row(s) affected	0.032 sec		
✅ 4	07:55:16	CREATE TABLE salesOrderDetails(Order_Number VARCHAR(15), ...	0 row(s) affected	0.016 sec		

3. Insert Data into following tables:

a) Clients

Client_Number	Client_Name	Address	City	Pincode	Province	Amount_Paid	Amount_Due
C101	Mai Xuan	Phu Hoa	Dai An	700001	Binh Duong	10000	5000
C102	Le Xuan	Phu Hoa	Thu Dau Mot	700051	Binh Duong	18000	3000
C103	Trinh Huu	Phu Loi	Da Lat	700051	Lam Dong	7000	3200
C104	Tran Tuan	Phu Tan	Thu Dau Mot	700080	Binh Duong	8000	0
C105	Ho Nhu	Chanh My	Hanoi	700005	Hanoi	7000	150
C106	Tran Hai	Phu Hoa	Ho Chi Minh	700002	Ho Chi Minh	7000	1300
C107	Nguyen Thanh	Hoa Phu	Dai An	700023	Binh Duong	8500	7500
C108	Nguyen Sy	Tan An	Da Lat	700032	Lam Dong	15000	1000
C109	Duong Thanh	Phu Hoa	Ho Chi Minh	700011	Ho Chi Minh	12000	8000
C110	Tran Minh	Phu My	Hanoi	700005	Hanoi	9000	1000

Script to insert data:

```

('C101','Mai Xuan','Phu Hoa','Dai An',700001,'Binh Duong',10000,5000),
('C102','Le Xuan','Phu Hoa','Thu Dau Mot',700051,'Binh Duong',18000,3000),
('C103','Trinh Huu','Phu Loi','Da Lat',700051,'Lam Dong ',7000,3200),
('C104','Tran Tuan','Phu Tan','Thu Dau Mot',700080,'Binh Duong',8000,0),
('C105','Ho Nhu','Chanh My','Hanoi',700005,'Hanoi',7000,150),
('C106','Tran Hai','Phu Hoa','Ho Chi Minh',700002,'Ho Chi Minh',7000,1300),

```

```
( 'C107','Nguyen Thanh ','Hoa Phu','Dai An',700023,'Binh Duong',8500,7500),
( 'C108','Nguyen Sy','Tan An','Da Lat',700032,'Lam Dong ',15000,1000),
( 'C109','Duong Thanh','Phu Hoa','Ho Chi Minh',700011,'Ho Chi Minh',12000,8000),
( 'C110','Tran Minh','Phu My','Hanoi',700005,'Hanoi',9000,1000);
```

The screenshot shows the SQL Developer interface. The main window displays a SQL script with the following content:

```
18 );
19
20 -- thêm dữ liệu vào bảng
21 INSERT INTO clients
22 VALUES
23 ('C101','Mai Xuan','Phu Hoa','Dai An',700001,'Binh Duong',10000,5000),
24 ('C102','Le Xuan','Phu Hoa','Thu Dau Mot',700051,'Binh Duong',18000,3000),
25 ('C103','Trinh Huu','Phu Loi','Da Lat',700051,'Lam Dong ',7000,3200),
26 ('C104','Tran Tuan','Phu Tan','Thu Dau Mot',700080,'Binh Duong',8000,0),
27 ('C105','Ho Nhu','Chanh My','Hanoi',700005,'Hanoi',7000,150),
28 ('C106','Tran Hai','Phu Hoa','Ho Chi Minh',700002,'Ho Chi Minh',7000,1300),
29 ('C107','Nguyen Thanh ','Hoa Phu','Dai An',700023,'Binh Duong',8500,7500),
30 ('C108','Nguyen Sy','Tan An','Da Lat',700032,'Lam Dong ',15000,1000),
31 ('C109','Duong Thanh','Phu Hoa','Ho Chi Minh',700011,'Ho Chi Minh',12000,8000),
32 ('C110','Tran Minh','Phu My','Hanoi',700005,'Hanoi',9000,1000);
33
34
35 CREATE TABLE product(
36     Product_Number VARCHAR(15),
37     Product_Name VARCHAR(25) NOT NULL UNIQUE,
38     Quantity On Hand INT NOT NULL.
```

The right sidebar shows a message: "Automatic context help disabled. Use the toolbar manually get help for the current caret position or toggle automatic help".

The bottom panel shows the "Action Output" window with the following results:

#	Time	Action	Message	Duration / Fetch
10	13:26:31	CREATE TABLE clients (Client_Number VARCHAR(10), -- varchar: độ rộng tối đa 10 Client_Name VA...	0 row(s) affected	0.015 sec
11	13:29:02	SELECT * FROM salemangement.clients LIMIT 0, 1000	0 row(s) returned	0.000 sec / 0.000 sec
12	13:42:33	CREATE TABLE product (Product_Number VARCHAR(15), Product_Name VARCHAR(25) NOT NUL...	0 row(s) affected	0.031 sec
13	13:43:03	SELECT * FROM salemangement.product LIMIT 0, 1000	0 row(s) returned	0.000 sec / 0.000 sec
14	13:51:42	INSERT INTO clients VALUES ('C101','Mai Xuan','Phu Hoa','Dai An',700001,'Binh Duong',10000,5000), ...	10 row(s) affected Records: 10 Duplicates: 0 Warnings: 0	0.016 sec

b) Product

Product_Number	Product_Name	Quantity_On_Hand	Quantity_Sell	Sell_Price	Cost_Price
P1001	TV	10	30	1000	800
P1002	Laptop	12	25	1500	1100
P1003	AC	23	10	400	300
P1004	Modem	22	16	250	230
P1005	Pen	19	13	12	8
P1006	Mouse	5	10	100	105
P1007	Keyboard	45	60	120	90
P1008	Headset	63	75	50	40

Script to insert data:

```
( 'P1001','TV',10,30,1000,800),
( 'P1002','Laptop',12,25,1500,1100),
( 'P1003','AC',23,10,400,300),
( 'P1004','Modem',22,16,250,230),
( 'P1005','Pen',19,13,12,8),
( 'P1006','Mouse',5,10,100,105),
```

('P1007','Keyboard',45,60,120,90),

('P1008','Headset',63,75,50,40);

```
66
67 • INSERT INTO product
68 VALUES
69 ('P1001','TV',10,30,1000,800),
70 ('P1002','Laptop',12,25,1500,1100),
71 ('P1003','AC',23,10,400,300),
72 ('P1004','Modem',22,16,250,230),
73 ('P1005','Pen',19,13,12,8),
74 ('P1006','Mouse',5,10,100,105),
75 ('P1007','Keyboard',45,60,120,90),
76 ('P1008','Headset',63,75,50,40);
77
```

c) Salesman

Salesman_Number	Salesman_Name	Address	City	Pincode	Province	Salary	Sales_Target	Target_Achieve	Phone
S001	Huu	Phu Tan	Ho Chi Minh	700002	Ho Chi Minh	15000	50	35	0902361123
S002	Phat	Tan An	Hanoi	700005	Hanoi	25000	100	110	0903216542
S003	Khoa	Phu Hoa	Thu Dau Mot	700051	Binh Duong	17500	40	30	0904589632
S004	Tien	Phu Hoa	Dai An	700023	Binh Duong	16500	70	72	0908654723
S005	Deb	Hoa Phu	Thu Dau Mot	700051	Binh Duong	13500	60	48	0903213659
S006	Tin	Chanh My	Da Lat	700032	Lam Dong	20000	80	55	0907853497

Script to insert data:

('S001','Huu','Phu Tan','Ho Chi Minh',700002,'Ho Chi Minh',15000,50,35,'0902361123'),

('S002','Phat','Tan An','Hanoi',700005,'Hanoi',25000,100,110,'0903216542'),

('S003','Khoa','Phu Hoa','Thu Dau Mot',700051,'Binh Duong',17500,40,30,'0904589632'),

('S004','Tien','Phu Hoa','Dai An',700023,'Binh Duong',16500,70,72,'0908654723'),

('S005','Deb','Hoa Phu','Thu Dau Mot',700051,'Binh Duong',13500,60,48,'0903213659'),

('S006','Tin','Chanh My','Da Lat',700032,'Lam Dong',20000,80,55,'0907853497');

```

95 • INSERT INTO salesman
96 VALUES
97 ('S001','Huu','Phu Tan','Ho Chi Minh',700002,'Ho Chi Minh',15000,50,35,'0902361123'),
98 ('S002','Phat','Tan An','Hanoi',700005,'Hanoi',25000,100,110,'0903216542'),
99 ('S003','Khoa','Phu Hoa','Thu Dau Mot',700051,'Binh Duong',17500,40,30,'0904589632'),
100 ('S004','Tien','Phu Hoa','Dai An',700023,'Binh Duong',16500,70,72,'0908654723'),
101 ('S005','Deb','Hoa Phu','Thu Dau Mot',700051,'Binh Duong',13500,60,48,'0903213659'),
102 ('S006','Tin','Chanh My','Da Lat',700032,'Lam Dong',20000,80,55,'0907853497');
103
104
105
106
107
108
109
110
111
112
113
114

```

menu
current
toggle

Context Help

Output

Action Output

#	Time	Action	Message
4	07:55:16	CREATE TABLE salesOrderDetails(Order_Number VARCHAR(15), Product_Number VARCHAR(15), ...	0 row(s) affected
5	07:57:16	INSERT INTO product VALUES ('P1001','TV',10,30,1000,800), ('P1002','Laptop',12,25,1500,1100), ('P1...	8 row(s) affected Records: 8 Duplicates: 0 Warnings: 0
6	07:58:09	SELECT * FROM salemangement.product LIMIT 0, 1000	8 row(s) returned
7	07:58:48	INSERT INTO salesman VALUES ('S001','Huu','Phu Tan','Ho Chi Minh',700002,'Ho Chi Minh',15000,50,...	6 row(s) affected Records: 6 Duplicates: 0 Warnings: 0

d) Sales_order

Order_Number	Order_Date	Client_Number	Salesman_Number	Delivery_Status	Delivery_Date	Order_Status
O20001	2022-01-15	C101	S003	Delivered	2022-02-10	Successful
O20002	2022-01-25	C102	S003	Delivered	2022-02-15	Cancelled
O20003	2022-01-31	C103	S002	Delivered	2022-04-03	Successful
O20004	2022-02-10	C104	S003	Delivered	2022-04-23	Successful
O20005	2022-02-18	C101	S003	On Way	null	Cancelled
O20006	2022-02-22	C105	S005	Ready to Ship	null	In Process
O20007	2022-04-03	C106	S001	Delivered	2022-05-08	Successful
O20008	2022-04-16	C102	S006	Ready to Ship	null	In Process
O20009	2022-04-24	C101	S004	On Way	null	Successful
O20010	2022-04-29	C106	S006	Delivered	2022-05-08	Successful
O20011	2022-05-08	C107	S005	Ready to Ship	null	Cancelled
O20012	2022-05-12	C108	S004	On Way	null	Successful
O20013	2022-05-16	C109	S001	Ready to Ship	null	In Process
O20014	2022-05-16	C110	S001	On Way	null	Successful

Script to insert data:

```

('O20001','2022-01-15','C101','S003','Delivered','2022-02-10','Successful'),
('O20002','2022-01-25','C102','S003','Delivered','2022-02-15','Cancelled'),
('O20003','2022-01-31','C103','S002','Delivered','2022-04-03','Successful'),
('O20004','2022-02-10','C104','S003','Delivered','2022-04-23','Successful'),
('O20005','2022-02-18','C101','S003','On Way',null,'Cancelled'),

```

```
(
'O20006','2022-02-22','C105','S005','Ready to Ship',null,'In Process'),
('O20007','2022-04-03','C106','S001','Delivered','2022-05-08','Successful'),
('O20008','2022-04-16','C102','S006','Ready to Ship',null,'In Process'),
('O20009','2022-04-24','C101','S004','On Way',null,'Successful'),
('O20010','2022-04-29','C106','S006','Delivered','2022-05-08','Successful'),
('O20011','2022-05-08','C107','S005','Ready to Ship',null,'Cancelled'),
('O20012','2022-05-12','C108','S004','On Way',null,'Successful'),
('O20013','2022-05-16','C109','S001','Ready to Ship',null,'In Process'),
('O20014','2022-05-16','C110','S001','On Way',null,'Successful');
```

```
124 • INSERT INTO salesorder
125 VALUES
126 ('O20001','2022-01-15','C101','S003','Delivered','2022-02-10','Successful'),
127 ('O20002','2022-01-25','C102','S003','Delivered','2022-02-15','Cancelled'),
128 ('O20003','2022-01-31','C103','S002','Delivered','2022-04-03','Successful'),
129 ('O20004','2022-02-10','C104','S003','Delivered','2022-04-23','Successful'),
130 ('O20005','2022-02-18','C101','S003','On Way',null,'Cancelled'),
131 ('O20006','2022-02-22','C105','S005','Ready to Ship',null,'In Process'),
132 ('O20007','2022-04-03','C106','S001','Delivered','2022-05-08','Successful'),
133 ('O20008','2022-04-16','C102','S006','Ready to Ship',null,'In Process'),
134 ('O20009','2022-04-24','C101','S004','On Way',null,'Successful'),
135 ('O20010','2022-04-29','C106','S006','Delivered','2022-05-08','Successful'),
136 ('O20011','2022-05-08','C107','S005','Ready to Ship',null,'Cancelled'),
137 ('O20012','2022-05-12','C108','S004','On Way',null,'Successful'),
138 ('O20013','2022-05-16','C109','S001','Ready to Ship',null,'In Process'),
139 ('O20014','2022-05-16','C110','S001','On Way',null,'Successful');
```

Output

Action Output

#	Time	Action	Message
31	08:21:57	ALTER TABLE SalesOrder DROP CONSTRAINT salesorder_chk_4	0 row(s) affected Records: 0 Duplicates: 0 Warnings: 0
32	08:21:59	ALTER TABLE SalesOrder ADD CONSTRAINT salesorder_chk_4 CHECK (Delivery_Status IN ('Delivered', 'On ...	0 row(s) affected Records: 0 Duplicates: 0 Warnings: 0
33	08:22:03	INSERT INTO salesorder VALUES ('O20001','2022-01-15','C101','S003','Delivered','2022-02-10','Successful'), (...	14 row(s) affected Records: 14 Duplicates: 0 Warnings: 0
34	08:22:10	SELECT * FROM salemangement.salesorder LIMIT 0, 1000	14 row(s) returned

e) Sales_Order_Details

Order_Number	Product_Number	Order_Quantity	Script to insert data:
O20001	P1001	5	
O20001	P1002	4	
O20002	P1007	10	
O20003	P1003	12	
O20004	P1004	3	
O20005	P1001	8	
O20005	P1008	15	
O20005	P1002	14	('O20006','P1002',5),

O20006	P1002	5	('O20007','P1005',6), (('O20008','P1004',8), (('O20009','P1008',2), (('O20010','P1006',11), (('O20010','P1001',9), (('O20011','P1007',6), (('O20012','P1005',3), (('O20012','P1001',2), (('O20013','P1006',10), (('O20014','P1002',20);
O20007	P1005	6	
O20008	P1004	8	
O20009	P1008	2	
O20010	P1006	11	
O20010	P1001	9	
O20011	P1007	6	
O20012	P1005	3	
O20012	P1001	2	
O20013	P1006	10	
O20014	P1002	20	

```

152 • INSERT INTO salesOrderDetails
153 VALUES
154 ('O20001','P1001',5),
155 ('O20001','P1002',4),
156 ('O20002','P1007',10),
157 ('O20003','P1003',12),
158 ('O20004','P1004',3),
159 ('O20005','P1001',8),
160 ('O20005','P1008',15),
161 ('O20005','P1002',14),
162 ('O20006','P1002',5),
163 ('O20007','P1005',6),
164 ('O20008','P1004',8),
165 ('O20009','P1008',2),
166 ('O20010','P1006',11),
167 ('O20010','P1001',9),
168 ('O20011','P1007',6),
169 ('O20012','P1005',3),
170 ('O20012','P1001',2),
171 ('O20013','P1006',10),
172 ('O20014','P1002',20);
173

```

Aul
disal
ma
curr
tc

Context

Output				
Action Output				
#	Time	Action	Message	
32	08:21:59	ALTER TABLE SalesOrder ADD CONSTRAINT salesorder_chk_4 CHECK (Delivery_Status IN ('Delivered', 'On ...	0 row(s) affected Records: 0 Duplicates: 0 Warnings: 0	
33	08:22:03	INSERT INTO salesorder VALUES ('O20001','2022-01-15','C101','S003','Delivered','2022-02-10','Successful', (...	14 row(s) affected Records: 14 Duplicates: 0 Warnings: 0	
34	08:22:10	SELECT * FROM salemanagement.salesorder LIMIT 0, 1000	14 row(s) returned	
35	08:23:22	INSERT INTO salesOrderDetails VALUES ('O20001','P1001',5), ('O20001','P1002',4), ('O20002','P1007',10), ('O...	19 row(s) affected Records: 19 Duplicates: 0 Warnings: 0	

4. Write SQL queries for following operations:

- Show the schema of “Clients”, “Product”, “Salesman”, “Salesorder”, “Salesorderdetails” tables.

```
174 • DESCRIBE salemanagement.clients;
175
```

Result Grid						
		Filter Rows:				
		Export:				
		Wrap Cell Content:				
Field	Type	Null	Key	Default	Extra	
Client_Number	varchar(10)	NO	PRI	NULL		
Client_Name	varchar(25)	NO		NULL		
Address	varchar(30)	YES		NULL		
City	varchar(30)	YES		NULL		
Pincode	int	NO		NULL		
Province	char(25)	YES		NULL		
Amount Paid	decimal(15,4)	YES		NULL		

```
175 • DESCRIBE salemanagement.product;
176
```

Result Grid						
		Filter Rows:				
		Export:				
		Wrap Cell Content:				
Field	Type	Null	Key	Default	Extra	
Product_Number	varchar(15)	NO	PRI	NULL		
Product_Name	varchar(25)	NO	UNI	NULL		
Quantity_On_Hand	int	NO		NULL		
Quantity_Sell	int	NO		NULL		
Sell_Price	decimal(15,4)	NO		NULL		
Cost_Price	decimal(15,4)	NO		NULL		

```
176 • DESCRIBE salemanagement.salesman;
177
```

Result Grid						
		Filter Rows:				
		Export:				
		Wrap Cell Content:				
Field	Type	Null	Key	Default	Extra	
Salesman_Number	varchar(15)	NO	PRI	NULL		
Salesman_Name	varchar(25)	NO		NULL		
Address	varchar(30)	YES		NULL		
City	varchar(30)	YES		NULL		
Pincode	int	NO		NULL		
Province	char(25)	YES		_utf8mb4\Viet Nam\	DEFAULT_GENERATED	
Salary	decimal(15,4)	NO		NULL		
Sales_Target	int	NO		NULL		
Target_Achieved	int	YES		NULL		
Phone	char(10)	NO	UNI	NULL		

177 • DESCRIBE salemanagement.salesorder;

178

Result Grid						
Filter Rows:		Export:		Wrap Cell Content:		
Field	Type	Null	Key	Default	Extra	
Order_Number	varchar(15)	NO	PRI	NULL		
Order_Date	date	YES		NULL		
Client_Number	varchar(15)	YES	MUL	NULL		
Salesman_Number	varchar(15)	YES	MUL	NULL		
Delivery_Status	varchar(15)	YES		NULL		
Delivery_Date	date	YES		NULL		
Order_Status	varchar(15)	YES		NULL		

178 • DESCRIBE salemanagement.salesorderdetails;

Result Grid						
Filter Rows:		Export:		Wrap Cell Content:		
Field	Type	Null	Key	Default	Extra	
Order_Number	varchar(15)	YES	MUL	NULL		
Product_Number	varchar(15)	YES	MUL	NULL		
Order_Quantity	int	YES		NULL		

- Display the content of “Clients”, “Product”, “Salesman”, “Salesorder”, “Salesorderdetails” tables.

33

34 • SELECT * FROM clients;

35

Result Grid								
Filter Rows:		Edit:		Export/Import:		Wrap Cell Content:		
Client_Number	Client_Name	Address	City	Pincode	Province	Amount_Paid	Amount_Due	
C101	Mai Xuan	Phu Hoa	Dai An	700001	Binh Duong	10000.0000	5000.0000	
C102	Le Xuan	Phu Hoa	Thu Dau Mot	700051	Binh Duong	18000.0000	3000.0000	
C103	Trinh Huu	Phu Loi	Da Lat	700051	Lam Dong	7000.0000	3200.0000	
C104	Tran Tuan	Phu Tan	Thu Dau Mot	700080	Binh Duong	8000.0000	0.0000	
C105	Ho Nhu	Chanh My	Hanoi	700005	Hanoi	7000.0000	150.0000	
C106	Tran Hai	Phu Hoa	Ho Chi Minh	700002	Ho Chi Minh	7000.0000	1300.0000	
C107	Nguyen Thanh	Hoa Phu	Dai An	700023	Binh Duong	8500.0000	7500.0000	
C108	Nguyen Sy	Tan An	Da Lat	700032	Lam Dong	15000.0000	1000.0000	
C109	Duong Thanh	Phu Hoa	Ho Chi Minh	700011	Ho Chi Minh	12000.0000	8000.0000	
C110	Tran Minh	Phu My	Hanoi	700005	Hanoi	9000.0000	1000.0000	
•	NULL	NULL	NULL	NULL	NULL	NULL	NULL	

181 • `SELECT * FROM product;`

Result Grid Filter Rows: Edit: Export/Import: Wrap Cell Content:						
	Product_Number	Product_Name	Quantity_On_Hand	Quantity_Sell	Sell_Price	Cost_Price
▶	P1001	TV	10	30	1000.0000	800.0000
	P1002	Laptop	12	25	1500.0000	1100.0000
	P1003	AC	23	10	400.0000	300.0000
	P1004	Modem	22	16	250.0000	230.0000
	P1005	Pen	19	13	12.0000	8.0000
	P1006	Mouse	5	10	100.0000	105.0000
	P1007	Keyboard	45	60	120.0000	90.0000
	P1008	Headset	63	75	50.0000	40.0000
•	NULL	NULL	NULL	NULL	NULL	NULL

182 • `SELECT * FROM salesman;`

Result Grid Filter Rows: Edit: Export/Import: Wrap Cell Content:										
	Salesman_Number	Salesman_Name	Address	City	Pincode	Province	Salary	Sales_Target	Target_Achieved	Phone
▶	S001	Huu	Phu Tan	Ho Chi Minh	700002	Ho Chi Minh	15000.0000	50	35	0902361123
	S002	Phat	Tan An	Hanoi	700005	Hanoi	25000.0000	100	110	0903216542
	S003	Khoa	Phu Hoa	Thu Dau Mot	700051	Binh Duong	17500.0000	40	30	0904589632
	S004	Tien	Phu Hoa	Dai An	700023	Binh Duong	16500.0000	70	72	0908654723
	S005	Deb	Hoa Phu	Thu Dau Mot	700051	Binh Duong	13500.0000	60	48	0903213659
	S006	Tin	Chanh My	Da Lat	700032	Lam Dong	20000.0000	80	55	0907853497
•	NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL

183 • `SELECT * FROM salesorder;`

Result Grid Filter Rows: Edit: Export/Import: Wrap Cell Content:							
	Order_Number	Order_Date	Client_Number	Salesman_Number	Delivery_Status	Delivery_Date	Order_Status
	O20002	2022-01-25	C102	S003	Delivered	2022-02-15	Cancelled
	O20003	2022-01-31	C103	S002	Delivered	2022-04-03	Successful
	O20004	2022-02-10	C104	S003	Delivered	2022-04-23	Successful
	O20005	2022-02-18	C101	S003	On Way	NULL	Cancelled
	O20006	2022-02-22	C105	S005	Ready to Ship	NULL	In Process
	O20007	2022-04-03	C106	S001	Delivered	2022-05-08	Successful
	O20008	2022-04-16	C102	S006	Ready to Ship	NULL	In Process
	O20009	2022-04-24	C101	S004	On Way	NULL	Successful
	O20010	2022-04-29	C106	S006	Delivered	2022-05-08	Successful
	O20011	2022-05-08	C107	S005	Ready to Ship	NULL	Cancelled
	O20012	2022-05-12	C108	S004	On Way	NULL	Successful

184 • `SELECT * FROM salesorderdetails;`

Result Grid   Filter Rows: Exports:			
	Order_Number	Product_Number	Order_Quantity
▶	O20001	P1001	5
	O20001	P1002	4
	O20002	P1007	10
	O20003	P1003	12
	O20004	P1004	3
	O20005	P1001	8
	O20005	P1008	15
	O20005	P1002	14
	O20006	P1002	5
	O20007	P1005	6
	O20008	P1004	8

Problem 2: Human Resources Management Database

1. Give the Database Schema below:

EMPLOYEES (employeeID, lastName, middle Name, firstName, dateOfBirth, gender, salary, address, managerID, departmentID, IsManager)

DEPARTMENT (departmentID, departmentName, managerID, dateOfEmployment)

DEPARTMENTADDRESS (departmentID, address)

PROJECTS (projectID, projectName, projectAddress, departmentID)

ASSIGNMENT (employeeID, projectID, workingHour)

RELATIVE (employeeID, relativeName, gender, dateOfBirth, relationship)

2. Explaining datatype of attributes in the table:

EMPLOYEES (employeeID, lastName, firstName, middle Name, dateOfBirth, gender, salary, managerID, departmentID)

#	Attribute	Datatype	Constraints
1	employeeID	varchar(3)	PRIMARY KEY
2	lastName	varchar(20)	NOT NULL
3	middle Name	varchar(20)	NULL
4	firstName	varchar(20)	NOT NULL
5	dateOfBirth	date - format MM-DD- YYYY	NOT NULL
6	gender	varchar(5)	NOT NULL
7	salary	money	NOT NULL
8	address	varchar(100)	NOT NULL
9	managerID	varchar(3)	FORIEGN KEY
10	departmentID	int	FORIEGN KEY

employeeID	lastName	middleName	firstName	dateOfBirth	gender	salary	address	managerID	departmentID
123	Dinh	Ba	Tien	1/9/1995	Nam	30000	731 Tran Hung Dao Q1 TPHCM	333	5
333	Nguyen	Thanh	Tung	12/8/1945	Nam	40000	638 Nguyen Van Cu Q5 TPHCM	888	5
453	Tran	Thanh	Tam	7/31/1962	Nam	25000	543 Mai Thi Luu Ba Dinh Ha Noi	333	5
666	Nguyen	Manh	Hung	9/15/1952	Nam	38000	975 Le Lai P3 Vung Tau	333	5
777	Tran	Hong	Quang	3/29/1959	Nam	25000	980 Le Hong Phong Vung Tau	987	4
888	Vuong	Ngoc	Quyen	10/10/1927	Nu	55000	450 Trung Vuong My Tho TG	NULL	1
987	Le	Thi	Nhan	6/20/1931	Nu	43000	291 Ho Van Hue Q.PN TPHCM	888	4
999	Bui	Thuy	Vu	7/19/1958	Nam	25000	332 Nguyen Thai Hoc Quy Nhon	987	4

```

4 • CREATE TABLE employees(
5     employeeID VARCHAR(3),
6     lastName VARCHAR(20) NOT NULL,
7     middleName VARCHAR(20),
8     firstName VARCHAR(20) NOT NULL,
9     dateOfBirth Date NOT NULL,
10    gender VARCHAR(5) NOT NULL,
11    salary DECIMAL(15,4) NOT NULL,
12    address VARCHAR(100) NOT NULL,
13    managerID VARCHAR(3),
14    departmentID INT,
15    PRIMARY KEY(employeeID)
16 );
17 • ALTER TABLE employees
18 ADD FOREIGN KEY (managerID) REFERENCES employees(employeeID);
19 • ALTER TABLE employees
20 ADD FOREIGN KEY (departmentID) REFERENCES department(departmentID);

```

```
133 • DESCRIBE employees;
```

Result Grid Filter Rows: Export: Wrap Cell Content:						
	Field	Type	Null	Key	Default	Extra
▶	employeeID	varchar(3)	NO	PRI	NULL	
	lastName	varchar(20)	NO		NULL	
	middleName	varchar(20)	YES		NULL	
	firstName	varchar(20)	NO		NULL	
	dateOfBirth	date	NO		NULL	
	gender	varchar(5)	NO		NULL	
	salary	decimal(15,4)	NO		NULL	
	address	varchar(100)	NO		NULL	
	managerID	varchar(3)	YES	MUL	NULL	
	departmentID	int	YES	MUL	NULL	

```
140 • SELECT * from employees;
```

Result Grid Filter Rows: Edit: Export/Import: Wrap Cell Content:										
	employeeID	lastName	middleName	firstName	dateOfBirth	gender	salary	address	managerID	departmentID
▶	123	Dinh	Ba	Tien	1995-01-09	Nam	30000.0000	731 Tran Hung Dao Q1 TPHCM	333	5
	333	Nguyen	Thanh	Tung	1945-12-08	Nam	40000.0000	638 Nguyen Van Cu TPHCM	888	5
	453	Tran	Thanh	Tam	1995-07-31	Nam	30000.0000	731 Tran Hung Dao Q1 TPHCM	333	5
	666	Nguyen	Manh	Hung	1952-09-15	Nam	38000.0000	975 Le Lai P3 Vung Tau	333	5
	777	Tran	Hong	Quang	1959-03-29	Nam	25000.0000	980 Le Hong Phong Vung Tau	987	4
	888	Vuong	Ngoc	Quyen	1927-10-10	Nu	55000.0000	450 Trung Vuong My Tho TG	NULL	1
	987	Le	Thi	Nhan	1931-06-20	Nu	43000.0000	291 Ho Van Hue Q.PN TPHCM	888	4
	999	Bui	Thuy	Vu	1958-07-19	Nam	25000.0000	332 Nguyen Thai Hoc Quy Nhon	987	4
*	NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL

DEPARTMENT (departmentID, departmentName, managerID, dateOfEmployment)

#	Attribute	Datatype	Constraints
1	departmentID	int	PRIMARY KEY
2	departmentName	varchar(10)	NOT NULL
3	managerID	varchar(3)	FORIEGN KEY
4	dateOfEmployment	date	NOT NULL

departmentID	departmentName	managerID	dateOfEmployment
1	Quan ly	888	19/06/1971
4	Dieu hanh	987	01/01/1985
5	Nghien cuu	333	22/05/1978

```

33 • CREATE TABLE department(
34     departmentID INT PRIMARY KEY,
35     departmentName VARCHAR(10) NOT NULL,
36     managerID VARCHAR(3),
37     dateOfEmployment DATE NOT NULL
38 );
39
40 • INSERT INTO department
41 VALUES
42 (1,'Quan ly','888','1971-6-19'),
43 (4,'Dieu hanh','987','1985-1-1'),
44 (5,'Nghien cuu','333','1978-5-22');
45
46 • ALTER TABLE department
47 ADD FOREIGN KEY (managerID) REFERENCES employees(employeeID);

132 • DESCRIBE department;

```

Result Grid Filter Rows: Export: Wrap Cell Content:						
	Field	Type	Null	Key	Default	Extra
▶	departmentID	int	NO	PRI	NULL	
	departmentName	varchar(10)	NO		NULL	
	managerID	varchar(3)	YES	MUL	NULL	
	dateOfEmployment	date	NO		NULL	

139 • `SELECT * from department;`

Result Grid

Filter Rows:

Edit:

	departmentID	departmentName	managerID	dateOfEmployment
▶	1	Quan ly	888	1971-06-19
	4	Dieu hanh	987	1985-01-01
	5	Nghien cuu	333	1978-05-22
*	NULL	NULL	NULL	NULL

DEPARTMENTADDRESS (departmentID, address)

#	Attribute	Datatype	Contraints
1	departmentID	int	PRIMARY KEY, FORIEGN KEY
2	address	varchar(30)	PRIMARY KEY

departmentID	address
1	TP HCM
4	HA NOI
5	NHA TRANG
5	TP HCM
5	VUNG TAU

```

49 • CREATE TABLE departmentaddress(
50     departmentID INT,
51     address VARCHAR(30),
52     PRIMARY KEY(departmentID, address)
53 );
54
55 • INSERT INTO departmentaddress
56 VALUES
57 (1, 'TP HCM'),
58 (4, 'HA NOI'),
59 (5, 'NHA TRANG'),
60 (5, 'TP HCM'),
61 (5, 'VUNG TAU');
62
63 • ALTER TABLE departmentaddress
64 ADD FOREIGN KEY (departmentID) REFERENCES department(departmentID);

```

133 • DESCRIBE departmentaddress;

Field	Type	Null	Key	Default	Extra
departmentID	int	NO	PRI	NULL	
address	varchar(30)	NO	PRI	NULL	

140 • SELECT * from departmentaddress;

departmentID	address
1	TP HCM
4	HA NOI
5	NHA TRANG
5	TP HCM
5	VUNG TAU
NULL	NULL

PROJECTS (projectID, projectName, projectAddress, departmentID)

#	Attribute	Datatype	Constraints
1	projectID	int	PRIMARY KEY
2	projectName	varchar(30)	NOT NULL
3	projectAddress	varchar(100)	NOT NULL
4	departmentID	int	FORIEGN KEY

<u>projectID</u>	projectName	projectAddress	<u>departmentID</u>
1	San pham X	VUNG TAU	5
2	San pham Y	NHA TRANG	5
3	San pham Z	TP HCM	5
10	Tin hoc hoa	HA NOI	4
20	Cap Quang	TP HCM	1
30	Dao tao	HA NOI	4

```

66 • CREATE TABLE projects(
67     projectID INT PRIMARY KEY,
68     projectName VARCHAR(30) NOT NULL,
69     projectAddress VARCHAR(100) NOT NULL,
70     departmentID INT
71 );
72
73 • INSERT INTO projects
74 VALUES
75 (1,'San pham X','VUNG TAU',5),
76 (2,'San pham Y','NHA TRANG',5),
77 (3,'San pham Z','TP HCM',5),
78 (10,'Tin hoc hoa','HA NOI',4),
79 (20,'Cap Quang','TP HCM',1),
80 (30,'Dao tao','HA NOI',4);
81
82 • ALTER TABLE projects
83 ADD FOREIGN KEY (departmentID) REFERENCES department(departmentID);
135 • DESCRIBE projects;

```

Field	Type	Null	Key	Default	Extra
projectID	int	NO	PRI	NULL	
projectName	varchar(30)	NO		NULL	
projectAddress	varchar(100)	NO		NULL	
departmentID	int	YES	MUL	NULL	

```

147 • SELECT * from projects;

```

projectID	projectName	projectAddress	departmentID
1	San pham X	VUNG TAU	5
2	San pham Y	NHA TRANG	5
3	San pham Z	TP HCM	5
10	Tin hoc hoa	HA NOI	4
20	Cap Quang	TP HCM	1
30	Dao tao	HA NOI	4
NULL	NULL	NULL	NULL

ASSIGNMENT (employeeID, projectID, workingHour)

#	Attribute	Datatype	Constraints
1	employeeID	varchar(3)	PRIMARY KEY, FORIEGN KEY
2	projectID	int	PRIMARY KEY, FORIEGN KEY
3	workingHour	float	NOT NULL

employeeID	projectID	workingHour
123	1	22.5
123	2	7.5
123	3	10
333	10	10
333	20	10
453	1	20
453	2	20
666	3	40
888	20	0
987	20	15

```

90 • CREATE TABLE assignment(
91     employeeID VARCHAR(3),
92     projectID INT,
93     workingHour FLOAT NOT NULL,
94     PRIMARY KEY(employeeID, projectID)
95 );
96 • INSERT INTO assignment
97 VALUES
98 ('123',1,'22.5'),
99 ('123',2,'7.5'),
100 ('123',3,'10'),
101 ('333',10,'10'),
102 ('333',20,'10'),
103 ('453',1,'20'),
104 ('453',2,'20'),
105 ('666',3,'40'),
106 ('888',20,'0'),
107 ('987',20,'15');

110 • ALTER TABLE assignment
111 ADD FOREIGN KEY (employeeID) REFERENCES employees(employeeID),
112 ADD FOREIGN KEY (projectID) REFERENCES projects(projectID);

139 • DESCRIBE assignment;

```

Result Grid						
		Filter Rows:			Export:	Wrap
	Field	Type	Null	Key	Default	Extra
▶	employeeID	varchar(3)	NO	PRI	NULL	
	projectID	int	NO	PRI	NULL	
	workingHour	float	NO		NULL	

146 • `SELECT * from assignment;`

Result Grid Filter Rows: Edit:			
	employeeID	projectID	workingHour
	123	2	7.5
	123	3	10
	333	10	10
	333	20	10
	453	1	20
	453	2	20
	666	3	40
	888	20	0

RELATIVE (employeeID, relativeName, gender, dateOfBirth, relationship)

#	Attribute	Datatype	Constraints
1	employeeID	varchar(3)	PRIMARY KEY, FOREIGN KEY
2	relativeName	varchar(50)	PRIMARY KEY
3	gender	varchar(5)	NOT NULL
4	dateOfBirth	date	NULL
5	relationship	varchar(30)	NOT NULL

employeeID	relativeName	gender	dateOfBirth	relationship
123	Chau	Nu	12/31/1978	Con gai
123	Duy	Nam	1/1/1978	Con trai
123	Phuong	Nu	5/5/1957	Vo chong
333	Duong	Nu	5/3/1948	Vo chong
333	Quang	Nu	4/5/1976	Con gai
333	Tung	Nam	10/25/1973	Con trai
987	Dang	Nam	2/29/1932	Vo chong

```

114 • CREATE TABLE relative(
115     employeeID VARCHAR(3),
116     relativeName VARCHAR(50),
117     gender VARCHAR(5) NOT NULL,
118     dateOfBirth Date,
119     relationship VARCHAR(30) NOT NULL,
120     PRIMARY KEY(employeeID, relativeName)
121 );
122
123 • INSERT INTO relative
124 VALUES
125 ('123','Chau','Nu','1978-12-31','Con gai'),
126 ('123','Duy','Nam','1978-1-1','Con trai'),
127 ('123','Phuong','Nu','1957-5-5','Vo chong'),
128 ('333','Duong','Nu','1948-5-3','Vo chong'),
129 ('333','Quang','Nu','1976-4-5','Con gai'),
130 ('333','Tung','Nam','1973-10-25','Con trai'),
131 ('987','Dang','Nam','1932-2-29','Vo chong');

```

```

133 • ALTER TABLE relative
134 ADD FOREIGN KEY (employeeID) REFERENCES employees(employeeID);

```

```

141 • DESCRIBE relative;
142

```

Result Grid						
		Filter Rows:			Export:	Wrap Cell
	Field	Type	Null	Key	Default	Extra
▶	employeeID	varchar(3)	NO	PRI	NULL	
	relativeName	varchar(50)	NO	PRI	NULL	
	gender	varchar(5)	NO		NULL	
	dateOfBirth	date	YES		NULL	
	relationship	varchar(30)	NO		NULL	

```

148 • SELECT * from relative;

```

Result Grid					
		Filter Rows:			Edit:
	employeeID	relativeName	gender	dateOfBirth	relationship
▶	123	Chau	Nu	1978-12-31	Con gai
	123	Duy	Nam	1978-01-01	Con trai
	123	Phuong	Nu	1957-05-05	Vo chong
	333	Duong	Nu	1948-05-03	Vo chong
	333	Quang	Nu	1976-04-05	Con gai
	333	Tung	Nam	1973-10-25	Con trai
	987	Dang	Nam	1932-02-29	Vo chong