



Front-end Development

Lecturer: Ung Văn Giàu
Email: giau.ung@eiu.edu.vn



Login

Username
Type your username

Password
Type your password


[Forgot password?](#)

LOGIN

Or Sign Up Using

[f](#) [t](#) [G](#)

Have not account yet?
SIGN UP

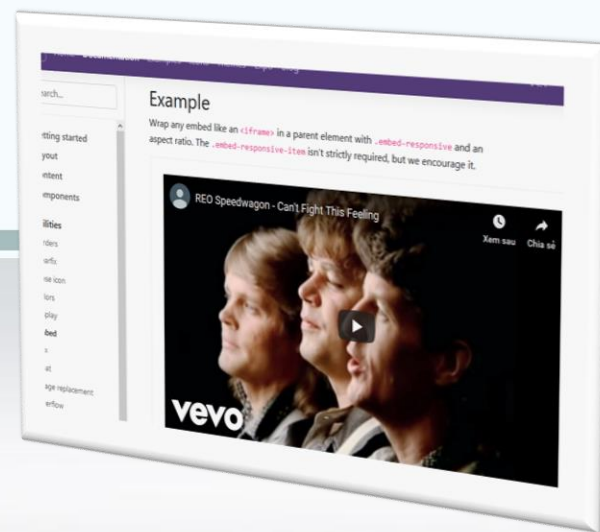

HTML Form and Frame

Contents

01

HTML Form

02

HTML Frame





LOGIN ×

Email

Password 👁

[Forgot password?](#)

[Log In](#)

Don't have an account? [Signup](#)

1. HTML Form

Entering User Data from a Web Page

What is a HTML Form?


- The **primary method for gathering data** from site visitors

- HTML Form can contain:

- Text fields for the user to type
- Buttons for interactions like
“Register”, “Login”, “Search”

- Check Google, Bing

Google search field is a simple Text field

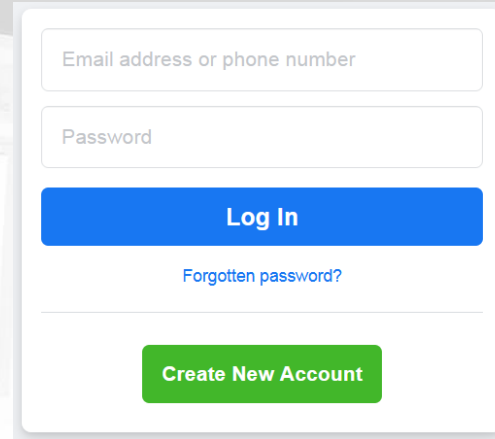

Email address or phone number

Password

Log In

[Forgotten password?](#)

Create New Account

How to Create a HTML Form?

- Create a form block with **<form></form>**
 - The “**action**” attribute tells where the form data should be sent
 - The “**method**” attribute tells how the form data should be sent – via **GET** or **POST** request
 - The “**enctype**” attribute specifies how the form-data should be encoded when submitting it to the server. (**Note:** It can be used only if method=“post”)
 - ✓ application/x-www-form-urlencoded: Default
 - ✓ multipart/form-data: is used if a file will be uploaded through the form

- Example:

```
<form name="myForm" method="post" action="path/to/some-script.php">  
    ...  
</form>
```

HTTP GET and POST method

GET Method	POST Method
Appends form-data into the URL in name/value pairs	Appends form-data inside the body of the HTTP request
The length of a URL is limited	Has no size limitations
Useful for form submissions where a user wants to bookmark the result	Form submissions with POST cannot be bookmarked
Never use GET to send sensitive data! (will be visible in the URL)	

GET is better for non-secure data, like query strings in Google

HTTP GET Method

- When you submit a form, the URL will appear in the browser address bar like the following:

Domain_name?name=value[&name_n=value_n]


- The data is appended to the URL as a series of **name/value** pairs. After the URL web address has ended, we include **a question mark (?)** followed by the name/value pairs, **each one separated** by an **ampersand (&)**.

HTTP POST Method

If a form is sent using this method, the data is appended to the body of the HTTP request.

```
POST / HTTP/2.0  
Host: foo.com  
Content-Type: application/x-www-form-urlencoded  
Content-Length: 13  
  
say=Hi&to=Mom
```

HTTP GET and POST method

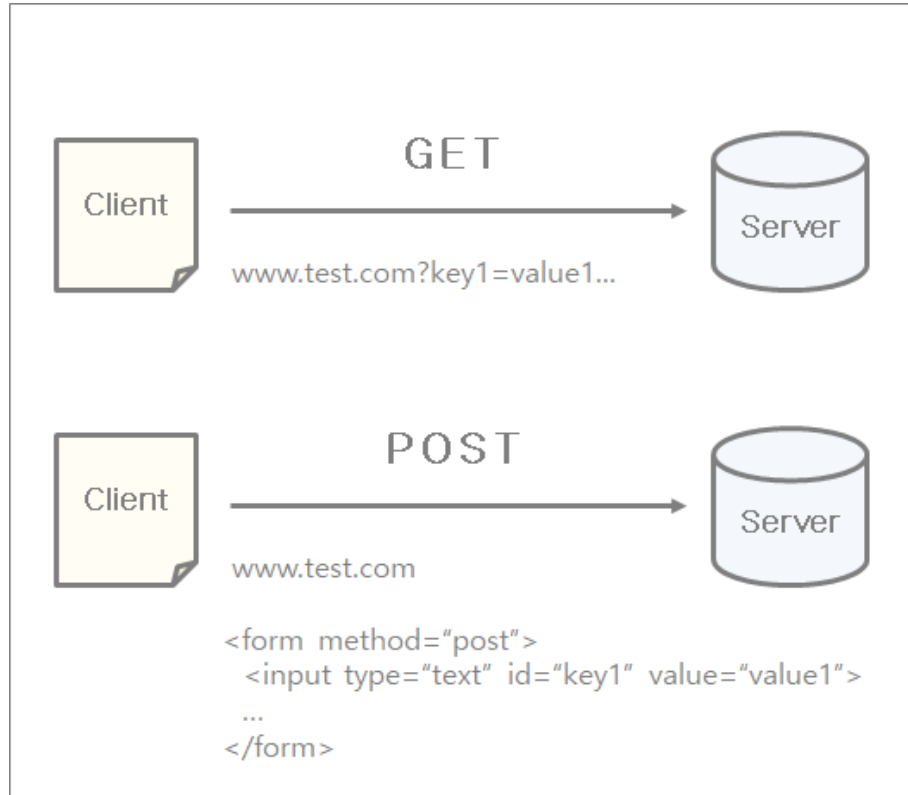



Email address

Password

Example textarea

Text Fields

Text Fields

- **Single-line** text input field:

```
<input type="text" name="Name" value="Default value" maxlength="100" />
```

- **Multi-line** text input field (**textarea**):

```
<textarea name="Content" cols="30" rows="10">  
    This is a multi-line text field  
</textarea>
```

- **Password** input – a text field which masks the entered text with * signs

```
<input type="password" name="password" minlength="8" />
```

Text Fields

- The “**name**” attribute is used to reference elements in the JavaScript language, or to **reference form data after a form is submitted**
- **Note:** Only form elements with a name attribute will have their values passed when submitting a form

Buttons

- **Reset** button – brings the form to its initial state

```
<input type="reset" name="resetBtn" value="Reset the form"/>
```

- **Submit** button:

```
<input type="submit" name="submitBtn" value="Send"/>
```

- **Ordinary** button – no default action, used with JavaScript

```
<input type="button" value="Click me" />
```

- **Image** button – acts like submit but image is displayed and click coordinates are sent

```
<input type="image" src="image.jpg" name="submitBtn" alt="Submit" />
```

Buttons

HTML5

- The **<button>** tag defines a button
- Inside a `<button>` element you **can put content**, like text or images

```
<button type="button">Click me!</button>  
<button type="reset">Reset</button>  
<button type="submit">Send</button>
```
- **Values of the type** attribute:
 - Button
 - Reset
 - Submit



Hobbies:

- ☒ Astrology
- ☐ Astronomy
- ☒ Cooking
- ☒ Dancing
- ☐ Numerology
- ☐ Painting
- ☒ Palmistry
- ☐ Photography
- ☐ Music

Marital Status:

- ☐ Single
- ☒ Married
- ☐ Widowed
- ☐ Divorced

Checkbox and Radio

Checkbox and Radio Button

- **Checkbox:**

```
<input type="checkbox" name="Hobby[]" value="Dancing" />  
<input type="checkbox" name="Hobby[]" value="Shopping" checked />
```

- **Radio button:**

Radio buttons can be grouped, allowing **only one** to be selected from a group:

```
<input type="radio" name="Title" value="Mr." />  
<input type="radio" name="Title" value="Ms." checked />
```

Hidden Field

- Hidden field **contains invisible data**

```
<input type="hidden" name="UserID" value="1" />
```

- Not shown to the user
- Used by **JavaScript** and **server-side** code

ViewState, SessionState in ASP.NET



Example select

1



Example multiple select

1

2

3

4



Select Fields

Select Fields

- **Dropdown** menu:

```
<select name="gender">  
  <option value="Value 1" selected="selected">Male</option>  
  <option value="Value 2">Female</option>  
  <option value="Value 3">Other</option>  
</select>
```

- **Multiple-choice** menu:

```
<select name="products" multiple="multiple">  
  <option value="Keyboard">Keyboard</option>  
  <option value="Mouse">Mouse</option>  
  <option value="CPU" selected="selected">CPU</option>  
  <option value="RAM">RAM</option>  
</select>
```



Example file input

Choose File No file chosen



Drag&Drop files here

or

Browse Files

Upload Field

Upload field

- The **<input type="file">** defines a file-select field and a “Browse” button for file uploads.
- When the “**multiple**” Boolean attribute is specified, the file input allows the user to select more than one file.
- The **accept** attribute defines the file types the file input should accept.
 - accept =“.doc,.docx,.xml,application/msword,application/vnd.openxmlformats-officedocument.wordprocessingml.document”: Microsoft Word files
 - accept =“.jpg, .pdf, .jpeg, image/.png”
 - accept=“audio/*, video/*, image/*”
- E.g.

```
<input type="file" name="file" accept=".jpg, .jpeg, .png" />  
<input type="file" name="files" multiple accept="image/*,.pdf" />
```



Email address

We'll never share your email with anyone else.

Password

☐ Check me out

Submit

Label

Label

- Label is used to **associate an explanatory text to a form field** using the field's ID

```
<label for="first-name">First Name</label>
<input type="text" id="first-name" />
```
- Clicking on a label **focuses** its associated field
 - Checkbox is **toggled**
 - Radio button is **checked**
- Label is both a **usability** and **accessibility** feature



Web browser window showing a document titled "Title of the document" and the URL <https://www.w3docs.com>.

Personal Information:

Name:

Email:

Date of birth:

Place of birth:

Fieldset

Fieldset

- Fieldset is used to **enclose a group** of related form fields:

```
<form method="Post" action="process.php">
  <fieldset>
    <legend>Client Details</legend>
    <input type="text" name="Name" />
    <input type="text" name="Phone" />
  </fieldset>
  <fieldset>
    <legend>Order Details</legend>
    <input type="text" name="Quantity" />
    <textarea cols="40" rows="10" name="Remarks"></textarea>
  </fieldset>
</form>
```

- The **<legend>** is the fieldset's title



The figure shows three vertically stacked spinboxes. Each spinbox consists of a rectangular input field and a control button with up and down arrows. The values displayed in the input fields are 63, 255, and 127, respectively.

Slider and Spinbox

Range and Spinbox

- Restrict users to enter only numbers
 - Additional attributes **min**, **max** and **step** and **value**
 - Become **Spinbox** or **Slider**, depending on the input type

```
<input type="range" min="0" max="100" />
```

```
<input type="number" min="0" max="100" />
```

- Have some **differences** on **different browsers**



First name Last name Username

Mark Otto @

City State

Choose...

☐ Agree to terms and conditions

Submit form

Please fill out this field.

HTML5 Attributes and Validation

Field Attributes from HTML 5

- **Required**

The field is required to be filled/selected

```
<input type="text" name="username" required>  
<input type="text" name="username" required="required">
```

- **Placeholder**

The attribute specifies a hint that describes the expected value of its field

```
<input type="text" name="username" placeholder="Your text (a short hint)">
```

- **Autofocus**

The field becomes on focus on page load

```
<input type="text" name="UserName" autofocus="autofocus" />
```

Input Field with Validation

- **Email** – provides a simple validation for email

- Can be passed a pattern for validation
- In a mobile device brings the email keyboard

```
<input type="email" required />
```

- **URL** – has validation for url

In a mobile device brings the url keyboard

```
<input type="url" required="true" />
```

- **Telephone**

In a mobile device brings the numeric keyboard

```
<input type="tel" required="true" />
```

<input> Type Attribute Values

- Text
- Email
- Password
- Hidden
- Checkbox
- Radio
- File
- Button
- Date
- Datetime-local
- Submit

- Reset
- Number
- Tel
- Color
- Url
- Range
- Search
- Image
- Month
- Time
- Week

View more: https://www.w3schools.com/tags/att_input_type.asp

Common attributes of <input> Tag

Source: https://www.w3schools.com/tags/tag_input.asp

Attribute	Value	Description
checked	checked	Specifies that an <input> element should be pre-selected when the page loads (for type="checkbox" or type="radio")
maxlength	number	Specifies the maximum number of characters allowed in an <input> element
minlength	number	Specifies the minimum number of characters required in an <input> element
name	text	Specifies the name of an <input> element
placeholder	text	Specifies a short hint that describes the expected value of an <input> element
readonly	readonly	Specifies that an input field is read-only
required	required	Specifies that an input field must be filled out before submitting the form
type	...	Specifies the type <input> element to display
value	text	Specifies the value of an <input> element



B Home **Documentation** Examples Themes Expo Blog v4.0 Download

Search...

- Getting started
- Layout
- Content
- Components
- Utilities
 - Borders
 - Clearfix
 - Close icon
 - Colors
 - Display
- Embed**
 - Flex
 - Float
 - Image replacement
 - Position
 - Screenreaders

REO Speedwagon - Can't Fight This Feeling (Official HD Video)

Watch later Share

Watch on YouTube

```
<div class="embed-responsive embed-responsive-16by9">  
<iframe class="embed-responsive-item" src="https://www.youtube.com/embed/zpOULjyy-n8?rel=0" allowfullsc
```

Copy

About
Example
Aspect ratios

2. HTML inline Frame

<iframe>

Inline Frame

<iframe>

Inline frame provides a way to **show one website inside another website.**

```
<iframe  
    src="https://vnexpress.net"  
    width="600"  
    height="400"  
    frameborder="yes"  
    scrolling="yes"  
></iframe>
```

Inline Frame

Embed Google Map

The image shows a Google Maps interface on a mobile device. The main screen displays the location of Eastern International University, with a search bar at the top containing the text "EIU, Nam Kỳ Khởi Nghĩa, Hòa Phú". Below the search bar is a photo of the university building. The university's name "Eastern International University" is prominently displayed, followed by its address "Đại học Quốc tế Miền Đông" and a 4.5-star rating with 223 reviews. At the bottom of the main screen, there are icons for "Directions", "Save", "Nearby", "Send to your phone", and "Share". The "Share" icon is highlighted with a red box and the number 2.

Overlaid on the main screen is a "Share" dialog box. The dialog box has a title "Share" and a close button. It offers two options: "Send a link" and "Embed a map". The "Embed a map" option is selected and highlighted with a red box and the number 3. Below this, the "Medium" format is chosen, and the embed code is displayed: `<iframe src="https://www.google.com/maps/embed?pb=!1m18!1m12" data-bbox="388 375 615 395">`. A "COPY HTML" button is located to the right of the code, highlighted with a red box and the number 4. The dialog box also features a preview of the map showing the university location, with a "View larger map" link. At the bottom of the dialog box, there is a link to the "terms of service".

Inline Frame

Embed YouTube Video

The image shows a YouTube video player interface. A share menu is open, displaying various sharing options. The 'Embed' option, represented by a code icon (<>), is highlighted with a red box and a red number '2'. Below the share menu, the video title 'SON TÙNG M-TP | MUỘN RỒI MÀ SAO CÒN | OFFICIAL MUSIC VIDEO' is visible, along with the view count '72,884,359 views' and the premiere date 'Premiered Apr 29, 2021'. At the bottom of the video player, the 'SHARE' button is also highlighted with a red box and a red number '1'.

Share

Embed WhatsApp Facebook Twitter Email 카카오톡

2

https://youtu.be/xypzmu5mMPY COPY

Start at 0:03

#1 ON TRENDING FOR MUSIC

SON TÙNG M-TP | MUỘN RỒI MÀ SAO CÒN | OFFICIAL MUSIC VIDEO

72,884,359 views • Premiered Apr 29, 2021

2M 56K 1 SHARE SAVE

Inline Frame

Embed YouTube Video

The screenshot shows a YouTube video player interface. The video title is "SƠN TÙNG M-TP | MUÔN RỒI MÃ SAO CÒN | OFFICIAL MUSIC VIDEO". The video player shows a man sitting on a large, curved, orange structure against a blue sky. The text "MUSIC VIDEO" and "muôn rồi mã sao còn" are overlaid on the video. Below the video, there is a "Watch on YouTube" button and a "Watch later" button. An "Embed Video" dialog box is open on the right side of the player, showing the embed code and options.

Embed Video

```
<iframe width="560" height="315"
src="https://www.youtube.com/embed
/xypzmu5mMPY" title="YouTube video
player" frameborder="0"
allow="accelerometer; autoplay;
clipboard-write; encrypted-media;
gyroscope; picture-in-picture"
allowfullscreen></iframe>
```

☐ Start at 0:03

EMBED OPTIONS

☒ Show player controls.

COPY



Summary

Notes

- Use **kebab-case** for **name**, **id**, and **class** attributes (e.g., user-name, contact-form).
- Always include a **<label>** for form inputs; match its **for** attribute with the input's **id**.
- Define **radio button groups** by giving all buttons the same **name** — only one can be selected at a time.
- Define **checkbox groups** by giving all boxes the same **name** — users can select multiple options.
- Always set a **value** for **checkboxes**, **radio buttons**, and **<option>** elements to ensure proper data submission.
- Every input must have a **name** attribute to be submitted (except when processed via JavaScript).

Exercise

Write the HTML code (tags) for the Lani & Dani webpage.





Q&A