

On The Cost of Fault-Tolerant Shallow Circuits.

Michael Ben-Or David Ponnarovsky

July 8, 2025

Abstract

In this work we study the overall depth overhead cost required for constructing fault tolerance circuits. We focus on shallow depth circuits classes, In particular, QAC_0 , $\text{QNC}_{0,f}$ and QNC_1 and certain known problem candidates for demonstrating quantum advantage such as factoring [Sho97] and Instantaneous Quantum Polynomial-time [BMS17], [Pal+24]. We only give a partial answers, Yet, clues that might pave the way towards a full understanding of the complexity versus fault tolerance trade-off.

1 Introduction.

The question about the feasibility of computation under noise is almost as ancient as the computer science field itself, initialized by Von Neumann [Neu56] at the time that classical computation putted in debuts. Time been pass and the followed works had pointed that not even a polynomial computation in the presence of noise is still reasonable but one can implement a fault tolerance version at a most constant times cost at the circuits depth [Pip85]. Or in asymptotic sense, classical computation in the presence of noise is as exactly hard as computation in ideal environment.

Once again, the feasibility question raised again, this time regarding quantum computing, and while an intensive work has been done, and also succeed to prove that polynomial quantum computation can be made fault tolerance, [AB99],[Got14] and even with only constant overhead at the original circuit width [Gro19], the required depth over-head is till not well understood. We stress out that in all the familiar constructions, in construct to Pippenger [Pip85], original constant-depth gates are mapped to asymptotically grow¹ depth gates.

This work address the above, We ask whether a magnitude depth overhead is an unavoidable price that one has to pay. And, in particular, whether an ideal QNC_1 circuits can be computed in noisy- QNC_1 circuits. We show how using the ideas presented in [Gro19] and [Pip85] gives almost immediately $\text{QNC}_{0,f} \subset \text{noisy-QNC}_1$ and that sampling from IQP [BMS17] also can be done in logarithmic depth circuits.

2 Notations.

In the following we present the notations used in the paper, readers who familiar with the literature of coding theory and quantum fault tolerance might skip Section 2.3 and Section 2.4 and continue directly to Section 2.5 which introduces less standard notations.

Once again, the feasibility question raised again, this time regarding quantum computing, and while an intensive work has been done, and also succeed to prove that polynomial quantum computation can be made fault tolerance, [AB99],[Got14] and even with only constant overhead at the original circuit width [Gro19], the required depth over-head is till not well understood. We stress out that in all the familiar constructions, in construct to Pippenger [Pip85], original constant-depth gates are mapped to asymptotically grow² depth gates.

2.1 Classical and Quantum Circuits.

Definition 2.1. *location (i, j) of C . [COMMENT] Add here a figure of classical circuit, that demonstrates locations.*

¹Note, that here, classical computation is also counted in the overall depth cost

²Note, that here, classical computation is also counted in the overall depth cost

2.2 Circuit Classes.

QAC_0 is the class of decision problems solvable by a family of constant-depth, polynomial-size quantum circuits. Here each layer of the circuit is a tensor product of one-qubit gates and Toffoli gates, or is a tensor product of controlled-NOT gates. QNC_0 Constant-depth quantum circuits without fanout gates. QNC_1 Same as QNC, but logarithmic depth instead of polylogarithmic depth.

2.3 Classical Coding Theory.

The notation used in this paper follows standard conventions for coding theory. We use n to represent the length of the code, k for the code's dimension, and ρ for its rate. The minimum distance of the code will be denoted as d , and the relative distance, i.e., d/n , as δ . In this paper, n and k will sometimes refer to the number of physical and logical bits. Codes will be denoted by a capital C followed by either a subscript or superscript. When referring to multiple codes, we will use the above parameters as functions. For example, $\rho(C_1)$ represents the rate of the code C_1 .

Square brackets are used to present all these parameters compactly, and we use them as follows: $C = [n, k, d]$ to declare a code with the specified length, dimension, and distance. Any theorem, lemma, or claim that states a statement that is true in the asymptotic sense refers to a family of codes. The parity check matrix of the code will be denoted as H , with the rows of H representing the parity check equations. The generator matrix of the code will be denoted as G , with the rows of G representing the basis of codewords. The syndrome of a received word will be denoted as s , which is the result of multiplying r by the transpose of H . We use C^\perp to denote the dual code of C , which is defined such that any codeword of it $z \in C^\perp$ is orthogonal to any $x \in C$, meaning $z \cdot x = 0$, where the product is defined as $x \cdot z = \sum_i x_i z_i$. C^\top stands for the code obtained by taking the parity check matrix of C and transposing it.

In this paper, we define the triple product $\mathbb{F}_2^n \times \mathbb{F}_2^n \times \mathbb{F}_2^n \rightarrow \mathbb{Z}$ as $|x \cdot y \cdot z| = \sum_i x_i y_i z_i$. Similarly, we define the binary product $|x \cdot y|$, noting that this product differs from the standard product by mapping into \mathbb{Z} rather than \mathbb{F}_2 . For $w \in \mathbb{F}_2^n$, we use the super operator $\cdot|_w$ to map an operator originally defined in an n -dimensional space to an operator that only acts on coordinates restricted to w . For example, $x|_w$ is the vector in $\mathbb{F}_2^{|w|}$ obtained by taking the values of x on coordinates where w is not zero. $|x \cdot y|_w = \sum_{i:w_i \neq 0} x_i y_i$ and $C|_w$ is the code obtained by taking the codewords of C restricted to w .

2.3.1 Expander Codes

We saw how a graph could give us arbitrarily long codes with a positive rate. We will show, Sipser's result [SS96] that if the graph is also an expander, we can guarantee a positive relative distance.

Definition 2.2. Denote by λ the second eigenvalue of the adjacency matrix of the Δ -regular graph. For our uses, it will be satisfied to define expander as a graph $G = (V, E)$ such that for any two subsets of vertices $T, S \subset V$, the number of edges between S and T is at most:

$$|E(S, T) - \frac{\Delta}{n}|S||T|| \leq \lambda \sqrt{|S||T|}$$

This bound is known as the Expander Mixing Lemma. We refer the reader to [HLW06] for more detailed servery.

Theorem. Theorem, let C be the Tanner Code defined by the small code $C_0 = [\Delta, \delta\Delta, \rho\Delta]$ such that $\rho \geq \frac{1}{2}$ and the expander graph G such that $\delta\Delta \geq \lambda$. C is a good LDPC code.

Proof. We have already shown that the graph has a positive rate due to the Tanner construction. So it's left to show also the code has a linear distance. Fix a codeword $x \in C$ and denote by S the support of x over the edges. Namely, a vertex $v \in V$ belongs to S if it connects to nonzero edges regarding the assignment by x . Assume towards contradiction that $|x| = o(n)$. And notice that $|S|$ is at most $2|x|$. Then by The Expander Mixing Lemma we have that:

$$\begin{aligned} \frac{E(S, S)}{|S|} &\leq \frac{\Delta}{n}|S| + \lambda \\ &\leq_{n \rightarrow \infty} o(1) + \lambda \end{aligned}$$


Namely, for any such sublinear weight string, x , the average of nontrivial edges for the vertex is less than λ . So there must be at least one vertex $v \in S$ that, on his local view, sets a string at a weight less than λ . By the definition of S , this string cannot be trivial. Combining the fact that any nontrivial codeword of the C_0 is at weight at least $\delta\Delta$, we get a contradiction to the assumption that v is satisfied, videlicet, x can't be a codeword \square

From now on, we will assume that the graphs are bipartite and we will denote the right and the left vertices by V^- and V^+ . Notice that such expanders near Ramanujan exist, see for example [LZ22a]. The partition into two subsets enable us to come with a simple efficient decoder.

Expanders code are known for having good decoders, beneath, in Section 2.3.1, we introduce a procedure to reduce an error. In overall, we alternately let to the right and then the left vertices to correct their own local view. In Lemma 2.1 we prove that when the applied error has size at most βn , for some constant β then the error's weight reduced by $\frac{1}{2}$. Repeating over the procedure $\Theta(\log(n))$ times completely correct the error.

We will call to the first stage, when only the right vertices suggest correction the right round, and to the second stage a left round. For the whole procedure, we will call a single correction round.

Data: $x \in \mathbb{F}_2^n$
Result: $\arg \min \{y \in C : |y + x|\}$ if
 $d(y, C) <$
1 **for** $v \in V^+$ **do**
2 $x'_v \leftarrow \arg \min \{y \in C_0 : |y + x|_v|\}$
3 **end**
4 **for** $v \in V^-$ **do**
5 $x'_v \leftarrow \arg \min \{y \in C_0 : |y + x|_v|\}$
6 **end**
7 **return** x
: Single decoding round

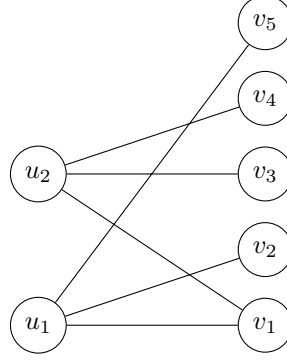

(b) location.

Lemma 2.1. *If the error is at wight less than βn then a single round of the majority reduce the error by at least constant fraction.*

Proof. Denote by $S^{(0)} \subset V^+$ and $T^{(0)} \subset V^-$ the subsets of left and right vertices adjacent to the error. And denote by $T^{(1)} \subset T^{(0)}$ the right vertices such any of them is connect by at least $\frac{1}{2}\delta_0\Delta$ edges to vertices at $S^{(0)}$. Note that that any vertex in $V^-/T^{(1)}$ has on his local view less than $\frac{1}{2}\delta_0\Delta$ faulty bits, So it corrects into his right local view in the first right correction round. Therefore after the right correction round the error is set only on $T^{(1)}$'s neighbourhood, namely at size at most $\Delta|T^{(1)}|$. We will show that this amount is strictly lower by a constant factor than $|e|$.

First, let's use the expansion property (Definition 2.2) for getting an upper bound on $T^{(1)}$ size:

$$\begin{aligned} \frac{1}{2}\delta_0\Delta|T^{(1)}| &\leq \Delta \frac{|T^{(1)}||S^{(0)}|}{n} + \lambda\sqrt{|T^{(1)}||S^{(0)}|} \\ \left(\frac{1}{2}\delta_0\Delta - \frac{|S^{(0)}|}{n}\Delta\right)|T^{(1)}| &\leq \lambda\sqrt{|T^{(1)}||S^{(0)}|} \\ |T^{(1)}| &\leq \left(\frac{1}{2}\delta_0\Delta - \frac{|S^{(0)}|}{n}\Delta\right)^{-2} \lambda^2|S^{(0)}| \end{aligned}$$

Since any left vertex adjoins to at most Δ faulty bits we have that $\Delta|S^{(0)}| \leq |e|$. Combing with the inequality above we get:

$$\Delta|T^{(1)}| \leq \left(\frac{1}{2}\delta_0\Delta - \frac{|e|}{n}\right)^{-2} \lambda^2|e|$$

Hence for $|e|/n \leq \beta = \frac{1}{2}\delta_0\Delta - \sqrt{2\lambda}$ it holds that $\Delta|T^{(1)}| \leq \frac{1}{2}|e|$. Namely the error is reduced by half. \square

2.3.2 Pippenger Construction.

The main insight behind Pippenger's construction is that against non trivial noise there is no point in decoding completing back to the code space since it's likely that in the follow turn the block will absorb a magnificent error. So instead of full decoding, one can perform a partial decoding round, for example, a single round of local majority. Keeping reducing the error will ensure that he distance of the state, with hight probability, will remain close (enough) to the ideal state along an ideal computation.

In the original construction, any bit encoded using the repetition code, notice that the repetition code can be thought as expander code on the bipartite Δ -regular graph where the local code C_0 is the repetition code on Δ bits. Then one can use Lemma 2.1 to show that a single round of decoding reduces the error by half.

Encode any bit of the original code by n bits using the repetition code. Replace any of the AND, and the OR gate by their transversal gates. In each even turn apply a single round of the majority decoder. Finally at the end apply the decoder.

Once again, the feasibility question raised again, this time regarding quantum computing, and while an intensive work has been done, and also succeed to prove that polynomial quantum computation can be made fault tolerance, [AB99],[Got14] and even with only constant overhead at the original circuit width [Gro19], the required depth over-head is still not well understood. We stress out that in all the familiar constructions, in construct to Pippenger [Pip85], original constant-depth gates are mapped to asymptotically grow^a depth gates.

(a) location.

^aNote, that here, classical computation is also counted in the overall depth cost

2.4 Quantum Codes.

A quantum code over n qubits is an embedding of $\mathcal{H}_2^{\otimes k}$ as a subspace of $\mathcal{H}_2^{\otimes n}$. Similar to classical codes, we will call n and k the physical and logical qubits. The embeddings of states in $\mathcal{H}_2^{\otimes k}$ are called codewords or encoded states. In addition, we will use the term "logical operator" (i.e. logical X_i) to describe an operator that acts on the code space exactly as it would act on the logical space $\mathcal{H}_2^{\otimes k}$ (in our example, turning on and off the encoded state corresponds to the i th qubit exactly as X_i acts as Pauli X on the i th qubit in $\mathcal{H}_2^{\otimes k}$).

We will denote by X and Z the single X and Z Pauli operators, by X_i the application of X on the i th qubit and nothing else (identity) on the rest of the qubits. By $X^{(v)}$ for some $v \in \mathbb{F}_2^n$, we mean the operator composed by applying X on each of the qubits whose index is a non-trivial coordinate of v and identity elsewhere. In a similar fashion, we define $Z^{(v)}$. When the context is clear, we will allow ourselves to omit the brackets, i.e. Z^v . The weight of a Pauli operator is the number of coordinates on which the operator acts non-trivially. Recall that the set of Pauli $+I$ spans all the Hermitian matrices. We say that the Pauli weight of an operator is the maximal weight of a Pauli in its Pauli decomposition. For example, consider the operator $A = IXX + ZII$, the weight of A is 2.

The distance of a quantum code is the minimal weight of an operator that takes one codeword to another. We use the standard bracket notation to describe quantum states and in addition, we define for a vector space $A \subset \mathbb{F}_2^n$ the notation $|A\rangle$ to represent the uniform superposition of all the vectors belonging to that space, namely:

$$|A\rangle = \frac{1}{\sqrt{|A|}} \sum_{x \in A} |x\rangle$$

We define in the same way the notation to hold for affine spaces, $|x + A\rangle$. We will use \propto to denote a quantum states up to normalization factor, for example $|\psi\rangle \propto |0\rangle + |1\rangle$ means that $|\psi\rangle = \frac{1}{\sqrt{2}}(|0\rangle + |1\rangle)$. A CSS code is a quantum code defined by a pair of classical codes C_X and C_Z , satisfying $C_Z^\perp \subset C_X$, such that any codeword of it has the form $|x + C_Z^\perp\rangle$, where $x \in C_X$. We will use Q to refer to a CSS code in general and use C_X/C_Z^\perp to refer to the vectors associated with the X -generators or the encoded states in the computational basis. In the same way, C_Z/C_X^\perp refers to the Q in the phase basis. We will say that a CSS code Q is a LDPC if C_X and C_Z are both LDPC codes. Our construction uses the classical Tanner code [Tan81], the expander codes [SS96], and Hyperproduct code (quantum expanders) [LTZ15], [TZ14], [BFS23]. We will not describe these constructions and refer the reader to those papers for further information.

2.5 Decoders.

We denote by C_g the good qLDPC code [Din+22] [PK21] [LZ22b], and by C_{ft} the concatenation code presented at [AB99] (ft stands for fault tolerance). For a code C_y , we use Φ_y, E_y, D_y to denote the channel maps circuits into the their matched circuits compute in the code space, the encoder, and the decoder, respectively. We use Φ_U to denote the 'Bell'-state storing the gate U . We say that a state $|\psi\rangle$ is at a distance d from a quantum code C if there exists an operator U that sends $|\psi\rangle$ into C such that U is spanned on Paulis with a degree of at most d . Sometimes, when the code being used is clear from the context, we will say that a block B of qubits has absorbed at most d noise if the state encoded on B is at a distance of at most d from that code.

2.6 Complexity Classes.

Definition 2.3 (\mathbf{NC} - Nick's Class). \mathbf{NC}_i is the class of decision problems solvable by a uniform family of Boolean circuits, with polynomial size, depth $O(\log^i(n))$, and fan-in 2.

Definition 2.4 (\mathbf{QNC}). The class of decision problems solvable by polylogarithmic-depth, and finite fan out/in quantum circuits with bounded probability of error. Similarly to \mathbf{NC}_i , \mathbf{QNC}_i is the class where the circuits have $\log^i(n)$ depth.

Definition 2.5 (\mathbf{QNC}_G). For a fixing finite fan in/out gateset G , the class with deciding circuits composed only for gates in G and at depth at most polylogarithmic. And in similar to \mathbf{QNC}_i , $\mathbf{QNC}_{G,i}$ is the restriction to circuits with depth at most $\log^i(n)$.

Open problem 2.1. Consider a fault tolerance scheme \tilde{C} for a logical circuit C which uses the logical gateset V_1, V_2, \dots, V_t . Given a set of fault tolerance logical gates U_1, U_2, \dots, U_t , how would the fault tolerance version of C look when using U_1, U_2, \dots, U_t ? Specifically, is rewriting the Solovay-Kitaev again might give a lower depth circuit?

Open problem 2.2. Given a code with non-trivial distance, what is the complexity of performing gate teleportation, specifically computing the T gate? Or computing a gate which is at the j -level of the Clifford hierarchy? What is the classical computation time needed to perform the correction? (Find the right Clifford gate for fixing the computation).

Open problem 2.3. Is it possible to compute fault tolerance without paying a significant overhead at the depth of the circuits? In particular, Is it $\mathbf{QNC}_1 \subset \text{noisy} - \mathbf{QNC}_1$.

3 Todo:

1. Move to encoding each qubit by logarithmic width (instead of chunks) the reason is that the gate teleportation becomes complicated when it applied over higher dimension.
2. Then showing for 2-qubit gates set that is indeed works.
3. Treating separately to noise observed in two qubits gates.

4 The Noise Model

Informally classical noisy circuits describe the running computation of circuits when the bits have probabilities to flip. As exactly to the classical case, in noisy quantum circuits qubits have probabilities to fault. We formalise the noise model by defining a channel $\mathcal{N} : \mathcal{C} \rightarrow \mathcal{D}(\mathcal{C})$ that given an ideal circuit induce distribution over circuits. For example, one can consider a Pauli channel, which after each gate of the original circuit, either do nothing with probability $1 - p$ or, with probability $1 - p$ impose uniformly one of the Pauli operators X, Z, Y . Formally:

Definition 4.1. Pauli channel $\mathcal{N} : \mathcal{C} \rightarrow \mathcal{D}(\mathcal{C})$ defined to give on input $C \in \mathcal{C}$ the distribution over circuits \tilde{C} where any even location of $(i, 2j)$ of \tilde{C} equals to the (i, j) location of C , and any odd location $(i, 2j + 1)$ of \tilde{C} is the density operator $(1 - p)I + \frac{p}{3}(X + Y + Z)$.

The Pauli channel is characterized by exhibits an independent noise on the qubits, Yet for most of the fault tolerance construction a much more weaker property is required to be assumed. We say that a channel is a local stochastic noise channel if the probability to error to be occur is exponentially decays at the number of qubits the error supports.

Definition 4.2. An error channel $\mathcal{N} : \mathcal{C} \rightarrow \mathcal{D}(\mathcal{C})$ will be said to be a local stochastic noise channel if there exists a constant c such the probability to a fault to be applied on locations (I, j) , where I is a subset of qubits, is less than c^{-n} .

Another important property of a noise model which we consider in this work is the accessibility to fresh qubits, also known as resets gate. When having an access to fresh qubits one can assume that in any time in the computation there are qubits at the $|0\rangle$ states. Usually those qubits are used to measured the syndrome relative to an error correction code. It was proven that without an access to fresh qubits quantum circuits cannot last than logarithmic depth without mixing into a fully mixed state, meaning to be turned into complete garbage [Aha+96]. That result also holds for a classical noisy computation.

Definition 4.3. An error channel $\mathcal{N} : \mathcal{C} \rightarrow \mathcal{D}(\mathcal{C})$ will be said to has a fresh qubits access if location (i, j) in an output gate \tilde{C} has a non zero probability to exhibits a fault if there is a $j' < j$ such a location (i, j') such that on the input circuit C , at location (i, j') a non identity gate is posed.

We close this section by formalize the noisy- \mathbf{QNC}_1 class.

Definition 4.4. We denote by noisy- \mathbf{QNC}_1 the class of decision problems solvable by logarithmic-depth quantum circuits, subjected to a local stochastic noise, with bounded probability of error.

We mention that in [Aha+96], it was proved how a fault tolerance circuit with an access to fresh qubits, at logarithmic depth, can be converted to a log depth circuits without a fresh qubits access at the cost which is at most polynomial in wide. Meaning that Proving that $\mathbf{QNC}_1 \subset \text{noisy-}\mathbf{QNC}_1$ implies also that \mathbf{QNC}_1 can be computed, in the presence of noise without an access to fresh qubits.

5 Fault Tolerance (With Resets gates) at Linear Depth.

Claim 5.1. *There exists a value $p_{th} \in (0, 1)$ such that if $p < p_{th}$, then any quantum circuit C with a depth of D and a width of W can be computed by a p -noisy circuit C' , which allows for resets. The depth of C' is at most $\max\{O(D), O(\log(WD))\}$.*

5.1 Initializing Magic for Teleportation gates and encodes ancillaries.

The Protocol:

1. Initialization of zeros: The qubits are divided into blocks of size $|B|$. Each block is encoded in C_g using $D_{ft}\Phi_{ft}[E_g] |0^{|B|}\rangle$.
2. Initialization of Magic for Teleportation gates: The gates in the original circuit are encoded in C_g using $D_{ft}\Phi_{ft}[E_g] |\Phi_U\rangle$.
3. Gate teleportation: Each gate in the original circuit is replaced by a gate teleportation.
4. Error reduction: After the initialization step, at each time tick, each block runs a single round of error reduction.

Claim 5.2 (From [LZ22a]). *Assuming that an error $|e| \leq \gamma n$, i.e e is supported on less than γn bits, then a single correction round reduce e to an error e' such that $|e'| < \nu|e|$.*

Claim 5.3. *The gate $D_{ft}\Phi_{ft}[E_g]$ initializes states encoded in C_g subject to a $3p$ -noise channel.*

Proof. Clearly, with high probability, $\Phi_{ft}[E_g]$ successfully encodes into $C_{ft} \circ C_g$, let's say with probability $1 - \frac{1}{poly(n)}$. Denote by E_i and D_i the encoder and decoder at the i th level of the concatenation construction. Consider the decoder under \mathcal{N} action: $P_2 D_1 P_2 D_2, \dots, P_{i-1} D_i P_i$, by the fault-tolerance construction, a logical error at the i th stage occurs with probability p^{2^i} . Therefore, by the union bound, the probability that in one of the steps the circuit absorbs an error that is not corrected is less than $p + p^2 + p^4 + \dots < 2p$. Hence, any decoded qubit absorbs noise with probability less than $2p$.

Thus, overall, we can bound the probability of a single qubit being faulty by:

$$\begin{aligned} \Pr[\text{fault}] &= \Pr[\text{fault}|\Phi_{ft}[E_g]] \cdot \Pr[\Phi_{ft}[E_g]] + \Pr[\text{fault}|\overline{\Phi_{ft}[E_g]}] \cdot \Pr[\overline{\Phi_{ft}[E_g]}] \\ &\leq \Pr[\text{fault}|\Phi_{ft}[E_g]] + \Pr[\overline{\Phi_{ft}[E_g]}] \leq 2p + \frac{1}{poly(n)} \leq 3p \end{aligned}$$

Remark 5.1. *In our construction, we use the concatenation code to encode blocks of length $\log(n)$. Therefore, any $poly(n)$ in the above should be replaced by $\log(n)$. However, this does not affect anything since the inequality does not depend on n .* □

Claim 5.4. *With a probability $1 - \frac{WD}{|B|} \cdot D2e^{-2|B|(\beta-p)}$, the total amount of noise absorbed in a block at any given time t , is less than γn .*

Proof. Consider the i th block, denoted by B_i . By applying Hoeffding's inequality, we have that the probability that more than $\beta|B|$ qubits are flipped at time t is less than $2e^{-2|B|(\beta-p)}$. By using the union bound over all blocks at all time locations, we can conclude that with probability $1 - \frac{WD}{|B|} \cdot D2e^{-2|B|(\beta-p)}$, the noise absorbed in a block is less than $\beta|B|$ for the entire computation.

Let X_t denote the support size of the error over B_i at time t . Using Claim 5.2, we can bound the total amount of error absorbed by a block until time t as follows:

$$X_t \leq \nu \cdot (X_{t-1} + \beta|B|) \leq \nu(\gamma + \beta)|B| \leq \gamma|B|$$
□

Claim 5.5. *The total depth of the circuit is $O(D) + O(\log^c |B|)$.*

Proof. The gate for encoding $|B|$ -length blocks in C_g is a Clifford gate and can therefore be computed in $O(\log |B|)$ depth. The encoding of the magic/bell states is done by first computing them in the logical space (un-encoded qubits) and then encode them using the encoder. Hence, the fault-tolerant version of both initializing ancillaries and magic states/bell states costs $O((\log |B|) \cdot \log^c(|B| \log |B|))$ ³ depth [AB99]. Backing into C_g from C_{ft} by decoding the concatenation code takes exactly as long as the encoding, namely $O((\log |B|) \cdot \log^c(|B| \log |B|))$.

Then, using the bell measurements, any of the logical gates takes $O(1)$ depth. Since we only perform a single round of error correction, the remaining computation until the last decoding stage takes at most constant time of the original depth. Finally, we pay $O(\log |B|)$ for complete decoding. Summing all, we get:

$$\begin{aligned} &O(\log |B| \cdot \log^c(|B| \log |B|)) + O(D) + O(\log |B|) \\ &= O(D) + O(\log^c |B|) \end{aligned}$$

³The width of the original circuit is $|B|^2$ so the number of locations is $|B|^2 \cdot \log |B|$

□

Assuming that W is polynomial in D , taking the block length to be $|B| = \log((W \cdot D)^c)$, as shown in Claim 5.4, results in a linear fault tolerance construction with a success probability of $1 - \frac{1}{\log^{c2}(W \cdot D)}$. This means that the fault tolerance version of circuits in QNC_1 has a logarithmic depth. Additionally, using the construction in [Aha+96] produces a polynomial fault tolerance circuit in the reversible gates setting. [COMMENT] We missed the fact that it requires non trivial classical computation to compute what gate should be applied after the gate teleportation (i.e UPU^\dagger).

6 $\text{QAC}_0 \subset \text{noisy-QNC}_1$

For completing this one has to show that one can compute the parity with a fixed gates set. Here is what we need:

1. having the logical states $|0\rangle + e^{i\frac{\pi}{2^j}} |1\rangle$
2. Note that gate $|0\rangle + e^{i\frac{1}{2^j}} |1\rangle$ is in the j th level of the Clifford. Yet after getting the Pauli one has to compute what gate should be applied. And when considering logical space it's not a constant operation, yet it could be computed in the logical space, so what we need is just to look, so for a m -length code, $\log m$. Or maybe can we do better?
3. if the diminution of the code is constant?

$$\begin{aligned} & |C_Z^\perp, C_Z^\perp\rangle + |C_Z^\perp + 1_L, C_Z^\perp + 1_L\rangle \\ & \rightarrow \alpha |C_Z^\perp\rangle \left(|C_Z^\perp, C_Z^\perp\rangle + |C_Z^\perp + 1_L, C_Z^\perp + 1_L\rangle \right) \\ & + \beta |C_Z^\perp + 1_L\rangle \left(|C_Z^\perp + 1_L, C_Z^\perp\rangle + |C_Z^\perp, C_Z^\perp + 1_L\rangle \right) \end{aligned}$$

7 Does $\text{NC}_1 \subset \text{noisy-QNC}_1$?

8 Does Factoring $\subset \text{noisy-QNC}_1$?

$$\begin{aligned} D(n) &= \Theta(\log n) + D(\sqrt{n}) \\ \Rightarrow D(n) &= \Theta(\log n) \end{aligned}$$

9 Overhead by Simple Counting Arguments.

Denote by $\Gamma(n, l)$ the number of circuits over n qubits at length at most n . Suppose that the code, can tolerate up to $\Delta = \delta n$ faults in each computation turn, and after syndromes measurement the errors collapse to one of γ options. We can bound the number of noisy versions of logical circuits over k , *qubits* as follows:

$$\begin{aligned} \Gamma(k, l) \cdot \left(\binom{n}{\Delta} \cdot \gamma^\Delta \right)^{lc} &\leq \Gamma(n, l) \Rightarrow 2^{nl(H(\delta) + \delta \log_2 \gamma)} \leq \frac{\Gamma(n, l \cdot c)}{\Gamma(k, l)} \\ H(\delta) + \delta \log_2 \gamma &\leq \frac{1}{nlc} \log \frac{\Gamma(n, l \cdot c)}{\Gamma(k, l)} \end{aligned}$$

Assuming the number of circuits behave according to an exponential rule yields:

$$\begin{aligned} H(\delta) + \delta \log_2 \gamma &\leq \frac{1}{nlc} (nlc - kl) = 1 - \frac{\rho}{c} \\ c &\geq \frac{\rho}{1 - H(\delta) - \delta \log_2 \gamma} \sim \rho (1 + H(\delta) + \delta \log_2 \gamma) \end{aligned}$$

Now, while for classical computation $\gamma = 1$ since only bit flips can occur, in the quantum case, γ equals at least 3 as one of the $\{X, Z, ZX\}$ might occur. Thus, we have already got that computing fault tolerance in the quantum regime is harder. Yet the construction can't be taken any further, since for non-trivial overhead - γ has to be a function that depends on n . [COMMENT] Draft:

$$\begin{aligned}
H(\delta) + \delta \log_2 \gamma &\leq \frac{1}{nlc} \sqrt{(nlc - kl)} = \frac{1}{\sqrt{nl}} \sqrt{\frac{1}{c} - \frac{\rho}{c^2}} \\
-\rho \frac{1}{c^2} + \frac{1}{c} - nl (H(\delta) + \delta \log_2 \gamma)^2 &\geq 0 \\
\frac{1}{c_{1,2}} &\leq \frac{-1 \pm \sqrt{1 - 4\rho nl (H(\delta) + \delta \log_2 \gamma)^2}}{-2\rho} \\
c &\geq \frac{-2\rho}{-1 \pm \sqrt{1 - 4\rho nl (H(\delta) + \delta \log_2 \gamma)^2}} \rightarrow \frac{2\rho}{1 \mp \sqrt{1 - 4\rho nl (\delta \log_2 \gamma)^2}} \\
c &\geq \frac{\rho}{1 - H(\delta) - \delta \log_2 \gamma} \sim \rho (1 + H(\delta) + \delta \log_2 \gamma)
\end{aligned}$$

[COMMENT] Draft: I have the felling that the right way to analyse Pipenger-style construction is by talking about known location of faults. Then the $\binom{n}{\Delta}$ term is subtracted. If we knowes, from head were the bits might flipped (or not flipped) then we can set the constant depth majority checks to reduce the error.

10 The CSS LDPC version for the Cleaning Lemma.

[COMMENT] Draft: Proving that any non-trivial code have a 'non-trivial' disjointness closes the case. [JKY18], [BK21]. i

Lemma 10.1. *For any non trivial logical operator $G \in L$ and any collection $R \subset [N]$ of qudits subsets Q_i such that $|R| < d$, there exists a representative $g \in G$ not supported on R i.e $\text{supp}(g) \cap R = \emptyset$.*

I wanted to say the following: Take a LDPC code, and then put the focus on a local system. Then I wanted to say that one can repeat on the proof from [JKY18] of $\Delta > 1 \Leftrightarrow d > 1$. So the problem there is that qubits that lay outside the local systems might be supported over all the qubits init. So we don't get the effect of $\Delta_{\Delta-1} \geq \frac{\Delta}{\Delta-1}$.

So question, Let Δ a regular degree of a graph, now, take the subset qubits defined by ommit from any vertices the i th bit, (Assume we erase an euler cycle), (There must be at least $\Delta/2$) now one can ask, if there is a presentation which doesn't intersect with the qubits we chosen.

Lemma 10.2. *Let $S = \langle S_1, \dots, S_m \rangle$ be a stabilizer code and $M \subset \Lambda$ be an arbitrary subset of qubits. Denote $J(M)$ a set of indexes a such that the support of S_a overlaps with M . Then one of the following is true:*

1. *There exists a non-trivial logical operator $P \in C(S)/S$ whose support is contained in M .*
2. *For any logical operator P one can choose a stabilizer S , such that PS acts trivially on qubits of M .*

Consider the partition of edges (over Tanner graph or whatever) such that any vertex sees less than $\delta\Delta$ edges. Then no logical codeword is supported by that set. Clearly, no X -operator is supported on that set of edges, and since the code is CSS, we have that if a Z -operator were supported, then H^n would send the operator to be an X -operator, and therefore a contradiction.

So, take an Hamiltonian cycle, in the graph (a cycle that pass trough all the vertices). Each vertex sees less than 2 edges, and therefore less than $\delta_0\Delta$. Now using the Cleaning Lemma, any operator has a presentation that acts trivially on the edges, assume we have 2 cycles. So, we show that $\Delta_2 \geq \frac{3}{2}$

Claim 10.1. *Let $C = (C_X, C_Z)$ be a CSS LDPC code, such that C_X is a Tanner code defined by the local codes C_0, C_1, \dots, C_m , each has Δ -bit length and has a distance at least $\delta\Delta$. Let $Q \subset [n]$ be a subset of qubits such that the intersection of Q with each of the supports of the local codes is of size less than $\delta\Delta$. Then no logical codeword is supported entirely on Q .*

[COMMENT] *What we want is actually a partitions of the graph, into subgraphs with degree strictly less than $\delta_0\Delta$.*

Proof. 1. Any vertex that sees a non-trivial assignment sees strictly less than $\delta\Delta$ bits, and therefore does not satisfy local constraints. Hence, no logical Pauli X is supported on Q .

2. If there is a logical Pauli Z , then since the code is a CSS, applying $H^{\otimes n}$ will send that operator to logical Pauli X . □

Claim 10.2. *If C_X is a Tanner graph, for which the graph has an Hamiltonian path, then there is a subset of qubits Q that satisfies the requirements in Claim 10.1.*

Proof. Take the path, and colorize every even edge. □

Notice that every expander has an Hamiltonian cycle: [Dra+24]⁴. Cleaning Lemmas: [BT09][YC10]

Definition 10.1. Let P be a logical Pauli in a stabilizer code C . Denote by $\Gamma_c(P)$ the c -disjointness of P , which is defined to be the size of the maximal subset of P -representations such that each qubit touches at most c of them, divided by c .

The c -disjointness of C is defined to be the minimum of c -disjointness, where the minimization is taken over all the logical Paulis of C .

Claim 10.3. Let C be a stabilizer code defined in Claim 10.1, Then:

$$\Gamma_{\Delta-2}(C) \geq \frac{\Delta}{\Delta-2}$$

Claim 10.4. The disjointness of the good quantum LDPC codes is greater than $\frac{\frac{1}{2}\Delta^2}{\frac{1}{2}\Delta^2-1}$.

Proof. Denote by Q_{ab} the subset of edges associated multiplying by a or a^{-1} from left and multiplying by b or b^{-1} from right namely $Q_{ab} = \{(g, agb), (g, a^{-1}gb^{-1})\}$, and consider the following edges partition $Q = \{Q_{ab} : a, b \in A \times A\}$. By the cleaning lemma (Lemma 10.2), and the [COMMENT] enter here, intimidate claim., for any logical pauli g there is a representation g_{ab} such that g' acts trivially on the qubits in Q_{ab} . Therefore, for any g the set $A(g) = \{g_{ab} : a, b \in A \times A\}$ is $\frac{1}{2}\delta^2 - 1$ -disjointness⁵. Thus the disjointness of the code is at least:

$$\max_c \Delta_c \geq \Delta_{\frac{1}{2}\Delta^2-1} \geq \frac{|Q|}{\frac{1}{2}\Delta^2-1} = \frac{\frac{1}{2}\Delta^2}{\frac{1}{2}\Delta^2-1}$$

□

[COMMENT] The proof above holds also for the toric code, and codes that are set on Cayley graphs. Let's try to generalize the proof for the hypergraph product code. There the stabilizers of the form $(c, u) \in C \times V$ connect to $(v, u) \sim (c, u)$ and $(c, c') \sim (c, u)$. The problem there is that any partition that uses u or c in it's associative has at least $\Theta(n)$ subsets, So the disjointness becomes $\frac{\sqrt{n}}{\sqrt{n}-1} \sim 1 + \frac{1}{\sqrt{n}}$.

References

- [Neu56] J. von Neumann. "Probabilistic Logics and the Synthesis of Reliable Organisms From Unreliable Components". In: *Automata Studies*. Ed. by C. E. Shannon and J. McCarthy. Princeton: Princeton University Press, 1956, pp. 43–98. ISBN: 9781400882618. DOI: [doi:10.1515/9781400882618-003](https://doi.org/10.1515/9781400882618-003). URL: <https://doi.org/10.1515/9781400882618-003>.
- [Tan81] R. Tanner. "A recursive approach to low complexity codes". In: *IEEE Transactions on Information Theory* 27.5 (1981), pp. 533–547. DOI: [10.1109/TIT.1981.1056404](https://doi.org/10.1109/TIT.1981.1056404).
- [Pip85] Nicholas Pippenger. "On networks of noisy gates". In: *26th Annual Symposium on Foundations of Computer Science (sfcs 1985)*. 1985, pp. 30–38. DOI: [10.1109/SFCS.1985.41](https://doi.org/10.1109/SFCS.1985.41).
- [Aha+96] D. Aharonov et al. *Limitations of Noisy Reversible Computation*. 1996. arXiv: [quant-ph/9611028](https://arxiv.org/abs/quant-ph/9611028) [quant-ph]. URL: <https://arxiv.org/abs/quant-ph/9611028>.
- [SS96] M. Sipser and D.A. Spielman. "Expander codes". In: *IEEE Transactions on Information Theory* 42.6 (1996), pp. 1710–1722. DOI: [10.1109/18.556667](https://doi.org/10.1109/18.556667).
- [Sho97] Peter W. Shor. "Polynomial-Time Algorithms for Prime Factorization and Discrete Logarithms on a Quantum Computer". In: *SIAM Journal on Computing* 26.5 (Oct. 1997), pp. 1484–1509. DOI: [10.1137/S0097539795293172](https://doi.org/10.1137/S0097539795293172). URL: <https://doi.org/10.1137/S0097539795293172>.
- [AB99] Dorit Aharonov and Michael Ben-Or. *Fault-Tolerant Quantum Computation With Constant Error Rate*. 1999. arXiv: [quant-ph/9906129](https://arxiv.org/abs/quant-ph/9906129) [quant-ph].
- [HLW06] Shlomo Hoory, Nathan Linial, and Avi Wigderson. "Expander graphs and their applications". In: *Bulletin of the American Mathematical Society* 43.4 (2006), pp. 439–561.

⁴even stronger than Hamiltonian path

⁵Any qubit belongs to a single Q_{ab} and therefore is not on the support of g_{ab} .

- [BT09] Sergey Bravyi and Barbara Terhal. “A no-go theorem for a two-dimensional self-correcting quantum memory based on stabilizer codes”. In: *New Journal of Physics* 11.4 (Apr. 2009), p. 043029. DOI: [10 . 1088 / 1367 - 2630 / 11 / 4 / 043029](https://doi.org/10.1088/1367-2630/11/4/043029). URL: <https://dx.doi.org/10.1088/1367-2630/11/4/043029>.
- [YC10] Beni Yoshida and Isaac L. Chuang. “Framework for classifying logical operators in stabilizer codes”. In: *Phys. Rev. A* 81 (5 May 2010), p. 052302. DOI: [10 . 1103 / PhysRevA . 81 . 052302](https://link.aps.org/doi/10.1103/PhysRevA.81.052302). URL: <https://link.aps.org/doi/10.1103/PhysRevA.81.052302>.
- [Got14] Daniel Gottesman. *Fault-Tolerant Quantum Computation with Constant Overhead*. 2014. arXiv: [1310 . 2984](https://arxiv.org/abs/1310.2984) [quant-ph].
- [TZ14] Jean-Pierre Tillich and Gilles Zemor. “Quantum LDPC Codes With Positive Rate and Minimum Distance Proportional to the Square Root of the Blocklength”. In: *IEEE Transactions on Information Theory* 60.2 (Feb. 2014), pp. 1193–1202. DOI: [10 . 1109 / tit . 2013 . 2292061](https://doi.org/10.1109/tit.2013.2292061). URL: <https://doi.org/10.1109/tit.2013.2292061>.
- [LTZ15] Anthony Leverrier, Jean-Pierre Tillich, and Gilles Zemor. “Quantum Expander Codes”. In: *2015 IEEE 56th Annual Symposium on Foundations of Computer Science*. IEEE, Oct. 2015. DOI: [10 . 1109 / focs . 2015 . 55](https://doi.org/10.1109/focs.2015.55). URL: <https://doi.org/10.1109/focs.2015.55>.
- [BMS17] Michael J. Bremner, Ashley Montanaro, and Dan J. Shepherd. “Achieving quantum supremacy with sparse and noisy commuting quantum computations”. In: *Quantum* 1 (Apr. 2017), p. 8. ISSN: 2521-327X. DOI: [10 . 22331 / q - 2017 - 04 - 25 - 8](https://doi.org/10.22331/q-2017-04-25-8). URL: <https://doi.org/10.22331/q-2017-04-25-8>.
- [JKY18] Tomas Jochym-O’Connor, Aleksander Kubica, and Theodore J. Yoder. “Disjointness of Stabilizer Codes and Limitations on Fault-Tolerant Logical Gates”. In: *Physical Review X* 8.2 (May 2018). ISSN: 2160-3308. DOI: [10 . 1103 / physrevx . 8 . 021047](https://dx.doi.org/10.1103/PhysRevX.8.021047). URL: <http://dx.doi.org/10.1103/PhysRevX.8.021047>.
- [Gro19] Antoine Grospellier. “Constant time decoding of quantum expander codes and application to fault-tolerant quantum computation”. Theses. Sorbonne Université, Nov. 2019. URL: <https://theses.hal.science/tel-03364419>.
- [BK21] John Bostanci and Aleksander Kubica. *Finding the disjointness of stabilizer codes is NP-complete*. 2021. arXiv: [2108 . 04738](https://arxiv.org/abs/2108.04738) [quant-ph]. URL: <https://arxiv.org/abs/2108.04738>.
- [PK21] Pavel Panteleev and Gleb Kalachev. *Asymptotically Good Quantum and Locally Testable Classical LDPC Codes*. 2021. DOI: [10 . 48550 / ARXIV . 2111 . 03654](https://arxiv.org/abs/10.48550/ARXIV.2111.03654). URL: <https://arxiv.org/abs/2111.03654>.
- [Din+22] Irit Dinur et al. *Good Locally Testable Codes*. 2022. DOI: [10 . 48550 / ARXIV . 2207 . 11929](https://arxiv.org/abs/10.48550/ARXIV.2207.11929). URL: <https://arxiv.org/abs/2207.11929>.
- [LZ22a] Anthony Leverrier and Gilles Zémor. *Decoding quantum Tanner codes*. 2022. arXiv: [2208 . 05537](https://arxiv.org/abs/2208.05537) [quant-ph]. URL: <https://arxiv.org/abs/2208.05537>.
- [LZ22b] Anthony Leverrier and Gilles Zémor. *Quantum Tanner codes*. 2022. arXiv: [2202 . 13641](https://arxiv.org/abs/2202.13641) [quant-ph].
- [BFS23] Nouédyne Baspin, Omar Fawzi, and Ala Shayeghi. *A lower bound on the overhead of quantum error correction in low dimensions*. 2023. DOI: [10 . 48550 / ARXIV . 2302 . 04317](https://arxiv.org/abs/10.48550/ARXIV.2302.04317). URL: <https://arxiv.org/abs/2302.04317>.
- [Dra+24] Nemanja Draganić et al. *Hamiltonicity of expanders: optimal bounds and applications*. 2024. arXiv: [2402 . 06603](https://arxiv.org/abs/2402.06603) [math.CO]. URL: <https://arxiv.org/abs/2402.06603>.
- [Pal+24] Louis Paletta et al. “Robust sparse IQP sampling in constant depth”. In: *Quantum* 8 (May 2024), p. 1337. ISSN: 2521-327X. DOI: [10 . 22331 / q - 2024 - 05 - 06 - 1337](https://doi.org/10.22331/q-2024-05-06-1337). URL: <https://doi.org/10.22331/q-2024-05-06-1337>.