

# Quantum Fault Tolerance Meets Toom's Contours

Michael Ben-Or   David Ponomarevsky

June 27, 2026

## Abstract

We suggest a fault tolerance scheme in the circuit model that both uses the 4D Toric code and has a constant-depth correction cycle. Until now, in the circuit model, the use of a topological code as the primary encoding and a constant-depth correction cycle were only achieved separately; this is the first work to achieve them simultaneously. In addition, to date, the 4D-Toric code has been proposed as a memory element in the thermal noise model. Our work shows that it is also suitable as a memory in the circuit model. To achieve that, we adopt the sweep rule defined in [KP19], as the main component of the correction cycle, thereby bypassing the need for a hierarchical correction cycle. The proof is based on alternative proofs of Gacs's theorems [BS88], [Gac21], which are distinguished from the standard approaches in that they trace the past that leads to error clusters.

# Contents

|           |                                                             |           |
|-----------|-------------------------------------------------------------|-----------|
| <b>1</b>  | <b>Introduction</b>                                         | <b>3</b>  |
| 1.1       | Background . . . . .                                        | 3         |
| 1.2       | Stating Our Results . . . . .                               | 4         |
| 1.3       | Discussions, Applications, and Further Directions . . . . . | 5         |
| <b>2</b>  | <b>Notations</b>                                            | <b>5</b>  |
| <b>3</b>  | <b>Computation Model</b>                                    | <b>6</b>  |
| 3.1       | Local Propagation Along a Running . . . . .                 | 9         |
| 3.2       | Layer Propagation and Time Coarse-Graining . . . . .        | 13        |
| <b>4</b>  | <b>The <math>(d, d')</math>-Dimensional Toric Code</b>      | <b>16</b> |
| <b>5</b>  | <b>Infinite Torics</b>                                      | <b>24</b> |
| <b>6</b>  | <b>Sweep Rule</b>                                           | <b>27</b> |
| <b>7</b>  | <b>Shrinking</b>                                            | <b>28</b> |
| 7.1       | The Sweep-rule Phase In The Dual Code . . . . .             | 35        |
| 7.2       | The bottom line . . . . .                                   | 37        |
| <b>8</b>  | <b>Toric Encoded Circuits and Toom's Contours</b>           | <b>37</b> |
| 8.1       | Space-Time Graph . . . . .                                  | 40        |
| <b>9</b>  | <b>Explantation of a Spanned Slice</b>                      | <b>44</b> |
| <b>10</b> | <b>Counting Subtrees.</b>                                   | <b>47</b> |
| <b>11</b> | <b>Tree Separator Lemma</b>                                 | <b>48</b> |
| <b>12</b> | <b>Proof of The Theorem</b>                                 | <b>49</b> |

# 1 Introduction

## 1.1 Background

Fault-tolerant constructions take ideal quantum circuits and establish their logical equivalence such that they endure fault occurrences. Their efficiency is typically measured by the amount of additional resources – qubits, computation time, range connectivity, etc. – required by the resulting circuit, beyond the scope of theoretical discussion; those parameters translate into the machine complexity and energy cost required to run the circuits. Minimizing overheads brings quantum computing applications closer to the near future.

Since the introduction of the quantum threshold theorem [AB99], which showed that quantum fault tolerance is in principle feasible, the main effort in subsequent work has focused on reducing the additional qubit overhead. A line of work has led to a constant-factor overhead in qubits, first in the instant-classical computation model [Got14], then in the standard circuit model [Gro19], [FGL18], [NP25]. Yet, although the best qubit overhead was reached, the depth overhead was only slightly improved from poly-logarithmic to logarithmic [NP25]. In fact, it seems that the same means that are used to reduce the qubit overhead are the ones that challenge reducing the depth overhead.

A key concept for reducing qubit overhead is to encode qubits with a high-rate quantum LDPC code. For those codes, except for the control-not, there are no known gates that can be realized in constant depth; furthermore, since the structure of the codes is relatively complicated – based on the skeletons of expander graphs - it seems hard to look for realizations of their logical operators. Without a constant-depth realization of logical operators, any construction that doesn't interfere with the order of the logical operations would admit a non constant-depth overhead.

Contrary to high-rate LDPC codes, topological error codes have a geometrical image that is well understood and, as a result, a wide range of works suggest efficient realization of their logical operators. For example, consider the 3D-color code [Bom15], fold-transversal gates on the surface code [BB24], and realization of the Clifford group on the 2D Toric [GV24].

Another branch of work, whose primary goal was to show that the embedding dimension of the computation can be reduced to 2D [BDL26], and more recently [DST26], uses topological codes as the main error correction code. Those constructions simplify the hardware realization; they suggest that quantum computers can be implemented by nearest-neighbor interactions automata - what is believed to be easier to develop. Yet, as in the threshold theorem [AB99], and in contrast to the works that use high-rate LDPC codes, they rely on a hierarchical correction cycle whose execution time grows with system size. Hence, even though those directions have the potential to overcome the non-constant depth overhead per gate, it seems that the correction cycle imposes a barrier for them to come up with a constant factor in depth-overhead construction.

## 1.2 Stating Our Results

In this work, we present a fault-tolerance construction that uses the 4D Toric code and has a constant-depth 'correction' cycle. Or in other words, a construction uses a relatively simple code, yet doesn't admit the cost of hierarchical correction cycle.

The computation model we consider is quantum circuits subject to *local-stochastic noise*, where only qubits are subjected to the noise, while classical bits are non-noisy. Classical computation is allowed, and the classical depth matters. Namely, at each time unit, only a constant depth of classical computation can be done. Local stochastic channel is defined to act such that the probability of any subset of locations  $S$  (space-time coordinates), which is picked prior to the channel's action, being affected decays exponentially with the subset size.

**Definition 1.1** (Local stochastic noise channel). *Let  $p \in (0, 1)$ . We say that the noise channel  $\mathcal{N}_{\mathcal{E}}$  is local stochastic with rate  $p$  if for every finite set of locations  $S \subset \mathbb{N} \times \mathbb{N}$ ,*

$$\Pr_{\mathcal{E} \sim \mathcal{N}_{\mathcal{E}}} [S \subset \text{Loc}(\mathcal{E})] \leq p^{|S|}.$$

For circuits  $\tilde{C}$  and  $C$ , we say that  $\tilde{C}$  simulates  $C$  with probability  $p$  if, when one stops a noisy run of  $\tilde{C}$  at a midpoint, they can, with probability  $p$ , recover by non-noisy operation an 'image' of a midpoint in the running of  $C$ , and if stopping at the last time point of  $\tilde{C}$  enables recovery of the 'image' of  $C$  at the end of its run. We proved the following theorem:

**Theorem 1.2** (Informal). *There exists a constant  $p_0 \in (0, 1)$  such that for any local stochastic noise channel  $\mathcal{N}_{\mathcal{E}}$  with rate  $p < p_0$ , a quantum circuit  $C$  with depth  $\mu$  and width  $w$ , and a big enough integer  $n$ , there exists a 'logical equivalence' circuit  $\tilde{C}$  with depth  $\Theta(\mu n)$  and width  $\Theta((w + \mu)n)$  that simulates  $C$  with probability:*

$$1 - \Theta(\text{poly}(w, \mu, n)) p^{\Theta(n^{\frac{1}{4}})}$$

Furthermore,  $\tilde{C}$  has the following two properties:

1. *After a short initialization stage (at depth  $\Theta(\log n)$ ), the qubits are encoded in the  $n$ -length 4D Toric code.*
2. *An error correction cycle takes  $O(1)$  depth, and the gates in each correction cycle don't depend on time. In particular, if  $C$  is the identity circuit, then after the initialization stage, the layers in  $\tilde{C}$  are the same.*

As mentioned earlier, both code simplicity and constant depth have already been achieved: the former as part of the quantum automation line of work, and the latter through the use of high-rate error correction codes. However, this is the first construction to achieve both simultaneously. Table 1 summarizes and compares the different works:

| WORKS LINE       | ERROR CORRECTION CODE              | CONSTANT-DEPTH CORRECTION CYCLE | DEPTH/QUBIT OVERHEAD | REF                      |
|------------------|------------------------------------|---------------------------------|----------------------|--------------------------|
| CONCATENATION    | Concatenation of fixed length code | ✗                               | $f(x)$               | [AB99]                   |
| HIGH-RATE        | Quantum expanders/ good QLDPC      | ✓                               | $f(x)$               | [Gro19], [FGL18], [NP25] |
| QUANTUM AUTOMATA | 2D-Toric code                      | ✗                               | $f(x)$               | [BDL26], [DST26]         |
| OURS             | 4D-Toric code                      | ✓                               | $f(x)$               |                          |

Table 1: Comparing different types of works on fault-tolerance.

### 1.3 Discussions, Applications, and Further Directions

Our result can be understood as follow: when the qubit overhead is not a consideration, it means that the 4D Toric code is as good as the good quantum LDPC / Hyperproduct code. That translates to the two following applications:

1. New approach for quantum fault tolerance: With the assistance of resource states and gate teleportation, we obtain a fault-tolerant construction with logarithmic depth overhead. Our proof is inherently different from prior works, describes in higher resolution the expected error, and might be used as a springboard for a constant depth overhead construction.
2. Memory in the circuit model: Protecting a 4D Toric encoded state for an exponentially long time is achieved by performing the same operation at each time unit, suggesting that the 4D Toric code is a promising candidate for memory in the circuit model. Combined with evidence that the 4D Toric code also functions as memory in thermal noise models [Ali+08], and given its relative simplicity, it appears to be a natural choice for real-world memory applications.

## 2 Notations

We follow the standard notations commonly used in the literature. For an integer  $n$ , we denote by  $[n]$  the set of integers  $\{1, 2, \dots, n\}$ . To present a countable set, which might or might not be finite, where the number of elements does not matter, we use curly brackets with a subscript denoting the first index of the set. For example,  $\{u_i\}_{i=1}$  represents the set  $u_1, u_2, \dots$ ; For finite sets, we might add a superscript to present the size of the set. We use a colon inside curly brackets to specify a set of elements satisfying a condition, i.e., for sets  $A, B$ , the notation  $\{a : a \in A, a \in B\}$  equals  $A \cap B$ . Curly brackets without subscripts or conditions refer to singletons. For example, for a given integer  $i$ , the set  $\{u_i\}$  is the set that contains only the element  $u_i$ . For an integer  $i$ , we denote by  $1_i$  the vector consisting of one at the  $i$ th coordinate and zero elsewhere.

When not otherwise mentioned, we consider quantum states over qubits, each lying in a two-dimensional Hilbert space  $\mathcal{H}_2$ , and denote by  $\mathcal{H}_{2^n}$  the Hilbert space

of an  $n$ -qubit system. Pure quantum states and their dual presentations are denoted by  $|\psi\rangle, \langle\psi|$ , and in the matrix representation, we use  $|\psi\rangle\langle\psi|$  to denote its density matrix. We will use  $\rho$  to denote a mixed state, whose density matrix is a trace one PSD matrix.

Below, a semi proof that in CSS code partial correction  $Z^e \rightarrow Z^{\hat{e}}$  doesn't add bit flip errors. It might adds a global phase. I should enter it in a section about CSS coding.

$$\begin{aligned}
& X^f Z^e |w + C_z^\perp\rangle \\
&= X^f Z^e X^w |C_z^\perp\rangle \\
\text{apply } H^{\otimes n} &\mapsto Z^f X^e Z^w |C_z\rangle \\
&= (-1)^{e \cdot w} Z^f Z^w X^e |C_z\rangle \\
\text{partial correction } X^{e+\hat{e}} &\mapsto (-1)^{(e+\hat{e})(f+w)} (-1)^{e \cdot w} Z^f Z^w X^{\hat{e}} |C_z\rangle \\
\text{apply } H^{\otimes n} &\mapsto (-1)^{(e+\hat{e})(f+w)} (-1)^{e \cdot w} X^f X^w Z^{\hat{e}} |C_z^\perp\rangle \\
&= (-1)^{(e+\hat{e})(f+w)} (-1)^{e \cdot w} (-1)^{\hat{e} \cdot w} X^f Z^{\hat{e}} X^w |C_z^\perp\rangle \\
&= (-1)^{(e+\hat{e})f} X^f Z^{\hat{e}} |w + C_z^\perp\rangle
\end{aligned}$$

### 3 Computation Model

Informally, a quantum circuit is a placement of a collection of quantum gates, taken from a finite set, at different space-time locations. Each such location records when the gate is applied and on which qubits it acts. Formally:

**Definition 3.1** (Quantum Circuit). *A space-time location is a pair  $l = (t, S)$ , where  $t$  is a time coordinate and  $S = (s_1, \dots, s_\Delta)$  is an ordered tuple of qubit indices. For a finite collection of quantum gates*

$$\mathcal{G} \subset \left\{ g: L(\mathcal{H}_2^{\otimes \Delta}) \rightarrow L(\mathcal{H}_2^{\otimes \Delta}) \right\},$$

*and integers  $w, d \in \mathbb{N}$ , a quantum circuit  $C$  of depth  $d$  and width  $w$  is a collection of tuples*

$$C = \{u_i = (g_i, l_i)\}_i,$$

*where each  $g_i \in \mathcal{G}$  and each location  $l_i = (l_{i,1}, l_{i,2})$  belongs to  $\mathbb{Z}_d \times \mathbb{Z}_w^\Delta$ . We call the tuples  $u_i$  the gates of  $C$ . They must satisfy the following compatibility condition: if two gates have the same time coordinate, then their supports are disjoint. Namely, for  $u_i = (g_i, l_i), u_j = (g_j, l_j) \in C$ , the equality  $l_{i,1} = l_{j,1}$  implies that the sets of qubit indices appearing in  $l_{i,2}$  and  $l_{j,2}$  are disjoint. We denote by*

$$\text{Loc}(C) := \{l_i : u_i = (g_i, l_i) \in C\}$$

*the set of locations occupied by the gates of  $C$ . We define the  $t$ -layer of  $C$  to be its restriction to gates at time  $t$ :*

$$C|_t := \{u_i = (g_i, l_i) : u_i \in C \text{ and } l_{i,1} = t\}.$$

To define the action of a quantum circuit  $C$  on a given mixed state, we first associate to  $C$  a directed acyclic graph.

**Definition 3.2** (Associated Computation DAG). *Let  $C = \{u_i\}_i$  be a quantum circuit with depth  $d$  and width  $w$ . We define the associated computation DAG of  $C$ , denoted by  $\pi_C$ , to be the directed acyclic graph  $\pi_C = (\mathcal{U}, E)$  as follows:*

1. *The vertex set is the gate set of  $C$ , namely  $\mathcal{U} = \{u_i\}_i$ .*
2. *For  $u_i = (g_i, l_i)$  and  $u_j = (g_j, l_j)$ , there is a directed edge  $(u_i, u_j) \in E$  if and only if  $j$  is one of the minimizers of*

$$\{l_{k,1} : (g_k, l_k) \in \mathcal{U}, l_{k,1} > l_{i,1}, l_{k,2} \cap l_{i,2} \neq \emptyset\}.$$

*Equivalently,  $u_j$  is one of the earliest later gates whose support intersects the support of  $u_i$ . There may be more than one such minimizer, so the out-degree may exceed one.*

*Suppose that  $J = (j_1, j_2, \dots, j_k)$  is an ordering of the gate indices that agrees with a topological order induced by  $\pi_C$ . Then we define the associated partial circuits  $C_J = \{C_{J,i}\}_{i=1}^k$  by*

1.  $C_{J,1} = \{u_{j_1}\}.$
2. *For  $1 \leq i < k$ , set*

$$C_{J,i+1} = C_{J,i} \cup \{u_{j_{i+1}}\}.$$

*We call  $C_{J,i}$  the partial computation circuit up to step  $i$ .*

**Definition 3.3.** *Let  $\rho$  be a density matrix over  $w$  qubits, and let  $C = \{u_i\}_{i=1}$  be a quantum circuit with depth  $d$  and width  $w$ . For any density matrix  $\sigma$ , quantum gate  $g \in \mathcal{G}$ , and location  $l$ , the application of the gate-location tuple  $(g, l)$  on  $\sigma$ , denoted by  $(g, l) \circ \sigma$ , is the application of  $g$  on  $\sigma$  where wires are ordered such that the first qubit in the input to  $g$  is  $l_{2,1}$ , the second is  $l_{2,2}$ , and so on. The result of the application of  $C$  on  $\rho$ , denoted by  $C \circ \rho$ , is given by iterative applications of the gates  $\{u_i\}_{i=1}$  on  $\rho$ , according to a topological order induced by  $\pi_C$ .*

*We say that  $\rho_1, \rho_2, \dots, \rho_k$  is a computation prefix if  $\rho_1 = \rho$  and  $\rho_{i+1} = u'_i \circ \rho_i$ , where  $\{u'_i\}_{i=1}$  is a prefix of a topological ordering of  $\{u_i\}_{i=1}$ . If  $\{u'_i\}_{i=1}$  contains all the gates in  $\{u_i\}_{i=1}$ , then we call  $\rho_1, \rho_2, \dots, \rho_k$  a running.*

**Definition 3.4** ( $C$  subjected to  $\mathcal{E}$  every  $m$  computational layers). *Let  $C = \{u_i\}_i$  be a quantum circuit with depth  $d$  and width  $w$ , let  $m \in \mathbb{N}$ , and set*

$$d_m := \left\lceil \frac{d}{m} \right\rceil.$$

*Let  $\mathcal{L} \subset [d_m] \times [w]$  be a set of locations, and let  $\mathcal{E}$  be a quantum circuit, such  $\text{Loc}(\mathcal{E}) = \mathcal{L}$ . We name  $\mathcal{E}$  subsets of faults, and we name the layers of  $\mathcal{E}$  fault layers. The circuit  $C$*

subjected to  $\mathcal{E}$  every  $m$  computational layers, denoted by  $C[\mathcal{E}]_m$ , is obtained by keeping the order of the computational layers of  $C$  and inserting one fault layer after every block of  $m$  consecutive computational layers. Thus the first fault layer is inserted after the computational layers  $1, \dots, m$ , the second is inserted after the computational layers  $m+1, \dots, 2m$ , and so on. Concretely, each computational gate  $u_i = (g_i, (t_i, S_i))$  of  $C$  is moved to the time coordinate

$$t_i + \left\lfloor \frac{t_i - 1}{m} \right\rfloor,$$

while each fault gate  $(g, (t, S)) \in \mathcal{E}$  is placed at time coordinate

$$t(m+1).$$

Equivalently, for each time index  $t \in [d_m]$ , the computational layers with original times

$$(t-1)m+1, \dots, \min\{tm, d\}$$

appear consecutively and are followed by the fault layer at time  $b(m+1)$ . When  $m=1$ , the computational gates occupy the odd time coordinates and the fault layers occupy the even time coordinates. When the parameter is omitted, we mean  $m=1$ . We denote the associated computation DAG of  $C[\mathcal{E}]_m$  by  $\pi[C, \mathcal{E}]$ .

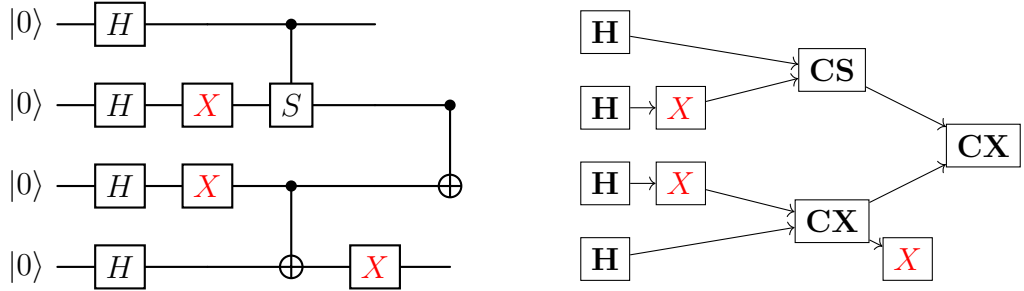


Figure 1: Example of a subjected quantum circuit: the even layers (0, 2, 4) contain the original gates, while the faults are imposed on the odd layers and marked in red.

**Remark 3.5.** Formally, a fault circuit is just a particular quantum circuit whose gates are interpreted as faults rather than as computational operations. Thus the distinction between a quantum circuit and a fault circuit is semantic rather than structural: both are circuits in the sense of Definition 3.1, but they play different roles in the analysis.

**Example 3.6.** When  $m=3$ , the computational layers are sent to the times

$$1, 2, 3, 5, 6, 7, 9, 10, 11, \dots,$$

while the fault layers are sent to the times

$$4, 8, 12, \dots$$



The chapter uses two different notions of propagation. They are related, but they serve different analytical purposes. The first notion does not rewrite the circuit and does not change the time coordinates. Instead, it propagates part of the error inside a fixed running of the computation and asks what the accumulated effect looks like at a chosen step  $\tau$ . In particular, this notion applies not only to a single fault, but also to a collection of faults propagated one after another according to the computation DAG. This is the right framework when one wants to speak about the size of the syndrome or of the deviation *at an actual intermediate time* of the computation.

This distinction is essential for statements such as the intermediate value theorem proved below. For example, a codeword may absorb noise during one time unit and be mapped to another codeword. If one only commutes whole fault layers forward, then one reorganizes the circuit globally and may lose the ability to point to the time at which a large syndrome first appears. The first notion of propagation avoids this problem: by propagating only part of the error while keeping the underlying time axis fixed, it lets us identify intermediate steps where a medium-size or large deviation must already be visible.

The second notion is more global. There we swap entire layers and then update the time coordinates accordingly. Its role is not to locate when a syndrome becomes large, but rather to compare different time-unfoldings of the same noisy circuit and to coarse-grain the noise into sparser effective layers. In particular, once the theorem proved using this second notion is established, any constant-depth collection of gates may be treated as a single time step for the purpose of the noise analysis: up to the corresponding effective rescaling of the noise rate, we may ignore the faults that occur during the internal application of those gates and replace them by an effective fault layer acting only before or after that constant-depth subcircuit. Moreover, this effective rescaling is correct with respect to local stochastic noise channels: a local stochastic noise channel is mapped to another local stochastic noise channel, with a rescaled noise rate.

For readability, we therefore separate the discussion into two subsections. The first subsection develops propagation inside a fixed running and is tailored to the deviation-cluster bounds, while the second develops layer propagation and is tailored to the coarse-graining argument.

### 3.1 Local Propagation Along a Running

**Definition 3.7** (Fault propagation to a step  $\tau$ ). *Let  $C = \{u_i\}_i$  be a quantum circuit, let  $J = (j_1, \dots, j_k)$  be an order agreeing with  $\pi_C$ , and let  $u_i \in C$ . Suppose that  $u_i = u_{j_i}$  in this order. If  $l > \tau$ , we define the propagation of  $u_i$  to step  $\tau$  to be the identity operator.*

*Otherwise, define operators  $X_0, X_1, \dots, X_{\tau-l}$  recursively by setting  $X_0 = u_{j_l}$  and requiring that for every  $1 \leq s \leq \tau - l$ ,*

$$X_{s-1}u_{j_{l+s}} = u_{j_{l+s}}X_s.$$

We then define the propagation of  $u_i$  to step  $\tau$  to be the operator

$$X := X_{\tau-l}.$$

Now let  $C[\mathcal{E}]$  be a noisy circuit, let  $J$  be an order agreeing with  $\pi_{C[\mathcal{E}]}$ , and let  $\tau$  be a step in that order. For each fault gate  $e \in \mathcal{E}$  that occurs no later than step  $\tau$ , denote by  $X_e^\tau$  its propagation to step  $\tau$ . We define the propagated error at step  $\tau$  by multiplying these propagated faults in reverse topological order:

$$X^\tau := \prod_{e \preceq \tau} X_e^\tau.$$

**Definition 3.8** (Deviation). *For a quantum circuit  $C$ , a set of faults  $\mathcal{E}$ , and step  $\tau$ , let  $X^\tau$  be the propagated error at step  $\tau$ . We define the deviation of  $C[\mathcal{E}]$  from  $C$  at step  $\tau$  by the set of indices on which  $X^\tau$  acts non-trivially.*

**Definition 3.9.** *Using the same notations as in Definition 3.8, for a set of unitary operators  $\mathcal{S} = \{s_i: \mathcal{H}_2^w \rightarrow \mathcal{H}_2^w\}_{i=1}$ , we define the propagated error up to stabilizers in  $\mathcal{S}$  as  $X^\tau[S] := \min_{s \in \mathcal{S}} \{w(sX)\}$ . Then, we define the deviation of  $C[\mathcal{E}]$  from  $C$  at step  $\tau$  up to stabilizers in  $\mathcal{S}$  to be the subset of coordinates on which  $X^\tau[S]$  acts non-trivially.*

The following definitions extend the notion of a Tanner graph to the setting of quantum circuits.

**Definition 3.10** (Tanner graph of a register). *Let  $C$  be a quantum circuit and let  $R$  be a register, namely a subset of qubits of  $C$ . The Tanner graph of  $R$  at step  $\tau$ , denoted by  $\mathcal{T}_{R,\tau}$ , is defined as follows:*

1. *If at step  $\tau$  the register  $R$  is encoded by a code  $\mathcal{C}$ , then  $\mathcal{T}_{R,\tau}$  is the Tanner graph of  $\mathcal{C}$ .*
2. *Otherwise,  $\mathcal{T}_{R,\tau}$  is the empty graph.*

When the step is clear from the context, we omit the subscript  $\tau$ .

**Definition 3.11** (Generalized Tanner graph of a circuit). *Let  $C$  be a quantum circuit. For registers  $A$  and  $B$  in  $C$ , define the generalized Tanner graph of their union by*

$$\mathcal{T}_{A \cup B, \tau} := \mathcal{T}_{A, \tau} \cup \mathcal{T}_{B, \tau}.$$

More generally, for a partition of the qubits into registers  $\{R_i\}_i$ , the generalized Tanner graph of  $C$  at step  $\tau$  is

$$\mathcal{T}_{C, \{R_i\}, \tau} := \bigcup_i \mathcal{T}_{R_i, \tau}.$$

When the partition and the step are clear, we abbreviate this notation to  $\mathcal{T}_C$ .

**Definition 3.12** (Clustered deviation). Let  $C$  be a quantum circuit, let  $R$  be a register of  $C$ , and let  $\mathcal{E}$  be a fault set. Let  $\mathcal{T}_{R,\tau}$  be the Tanner graph of  $R$  at step  $\tau$ , and let  $\mathcal{D}_\tau$  be the deviation of  $C[\mathcal{E}]$  from  $C$  on  $R$  at step  $\tau$ . Denote by  $\mathcal{T}_{R,\tau}|_{\mathcal{D}_\tau}$  the subgraph induced on the left vertices corresponding to the qubits in  $\mathcal{D}_\tau$ .

We say that two left vertices are connected if they share a common right neighbor. The deviation clusters at step  $\tau$  are the connected components of  $\mathcal{T}_{R,\tau}|_{\mathcal{D}_\tau}$ . The size of a deviation cluster is the number of right vertices it contains.

**Claim 3.13.** Let  $C$  be a quantum circuit whose gates act on at most  $\Delta$  qubits. Let  $R$  be a quantum register encoded by a quantum error-correcting code whose Tanner graph has left degree at most  $\Delta_1$  and right degree at most  $\Delta_2$ . Fix a fault set  $\mathcal{E}$  and an order  $J$  agreeing with  $\pi_{C[\mathcal{E}]}$ . For a step  $\tau \in J$ , let  $Y_1^{(\tau)}, Y_2^{(\tau)}, \dots$  denote the deviation clusters at step  $\tau$ .

Suppose that at step  $\tau_1$  there is a deviation cluster  $Y_i^{(\tau_1)}$ . Then there exist deviation clusters  $Z$  and  $Z'$  at step  $\tau_1 - 1$  such that

$$Z \cap Y_i^{(\tau_1)} \neq \emptyset, \quad |Z| \geq \frac{1}{\Delta \Delta_1 \Delta_2} |Y_i^{(\tau_1)}|,$$

and

$$Z' \cap Y_i^{(\tau_1)} \neq \emptyset, \quad |Z'| \leq \Delta \Delta_1 \Delta_2 |Y_i^{(\tau_1)}|.$$

*Proof.* Let  $u$  be the gate applied at step  $\tau_1$ . Passing from step  $\tau_1 - 1$  to step  $\tau_1$  can modify the deviation only on qubits touched by  $u$ . Since  $u$  acts on at most  $\Delta$  qubits, and each such qubit is adjacent in the Tanner graph to at most  $\Delta_1$  checks, each of which meets at most  $\Delta_2$  qubits, the gate  $u$  can interact with vertices belonging to at most

$$\Delta \Delta_1 \Delta_2$$

deviation clusters from step  $\tau_1 - 1$ .

Let  $Y_1, \dots, Y_m$ , with  $m \leq \Delta \Delta_1 \Delta_2$ , be those deviation clusters at step  $\tau_1 - 1$  that meet the neighborhood affected by  $u$  and whose union contains  $Y_i^{(\tau_1)}$ . Then

$$|Y_i^{(\tau_1)}| \leq \sum_{j=1}^m |Y_j| \leq m \max_{1 \leq j \leq m} |Y_j| \leq \Delta \Delta_1 \Delta_2 \max_{1 \leq j \leq m} |Y_j|.$$

Hence one of these clusters, call it  $Z$ , satisfies

$$|Z| \geq \frac{1}{\Delta \Delta_1 \Delta_2} |Y_i^{(\tau_1)}|.$$

By construction,  $Z \cap Y_i^{(\tau_1)} \neq \emptyset$ .

For the upper bound, apply the same argument to the inverse gate  $u^\dagger$ , which also acts on at most  $\Delta$  qubits. Viewing the transition from step  $\tau_1$  back to step  $\tau_1 - 1$

as the application of  $u^\dagger$ , we conclude that some deviation cluster  $Z'$  at step  $\tau_1 - 1$  intersecting  $Y_i^{(\tau_1)}$  satisfies

$$|Z'| \leq \Delta\Delta_1\Delta_2 |Y_i^{(\tau_1)}|.$$

This proves both bounds.  $\square$

**Corollary 3.14** (Intermediate Value Theorem). *Let  $\alpha = 1/(\Delta\Delta_1\Delta_2)$ , and let  $x$  be an integer. Assume that at the initial step  $\tau_o$ , there is no deviation cluster of size more than  $\alpha x$ , and that at a step  $\tau_1 \in J$ , such that  $\tau_1 > \tau_o$ , there is a deviation cluster  $Y^{(\tau_1)}$  of size  $|Y^{(\tau_1)}| > x$ . Then there is a step  $\tau_\star \in J$  such that  $\tau_o < \tau_\star < \tau_1$  for which there is a deviation cluster  $Z$  at step  $\tau_\star$ , satisfying that the size of  $Z$  is in the range  $(\alpha x, x)$ .*

*Proof.* Assume for contradiction that for every step  $\tau$  with  $\tau_o < \tau < \tau_1$ , all deviation clusters have size at most  $\alpha x$ . In particular, this holds at step  $\tau_1 - 1$ . On the other hand, since  $|Y^{(\tau_1)}| > x$ , Claim 3.13 implies the existence of a deviation cluster at step  $\tau_1 - 1$  of size at least

$$\frac{1}{\Delta\Delta_1\Delta_2} |Y^{(\tau_1)}| = \alpha |Y^{(\tau_1)}| > \alpha x,$$

which is a contradiction. Therefore there must exist an intermediate step  $\tau_\star$  with  $\tau_o < \tau_\star < \tau_1$  at which some deviation cluster has size in the interval  $(\alpha x, x)$ .  $\square$

**Claim 3.15.** *Let  $\alpha = (\Delta\Delta_1\Delta_2)^{-1}$ . Let  $C$  be a quantum circuit with order  $J$  and depth  $d$ , and let  $\mathcal{E} \sim \mathcal{N}_{\mathcal{E}}$ , so that  $C[\mathcal{E}]$  is a random circuit whose gates act on at most  $\Delta$  qubits. Fix a time  $t \leq 2d$  and an integer  $x \in \mathbb{N}$ . Let  $A$  be the event that by time  $t$  there exists a deviation cluster of size greater than  $x$ . For each step  $\tau \in J$ , let  $B_\tau$  be the event that step  $\tau$  is the first step at which there exists a deviation cluster of size in the interval  $(\alpha x, x)$ . Then*

$$\Pr[A] \leq 2wd \max_{\tau \in [2wd]} \Pr[B_\tau].$$

*Proof.* By Corollary 3.14, whenever the event  $A$  occurs there exists a step  $\tau \in J$  with  $\tau \leq 2wt$  at which there is a deviation cluster of size in the interval  $(\alpha x, x)$ . Hence

$$A \subset \bigcup_{\tau \in [2wt]} B_\tau \subset \bigcup_{\tau \in [2wd]} B_\tau.$$

The union bound now gives

$$\Pr[A] \leq \Pr\left[\bigcup_{\tau \in [2wd]} B_\tau\right] \leq \sum_{\tau \in [2wd]} \Pr[B_\tau] \leq 2wd \max_{\tau \in [2wd]} \Pr[B_\tau].$$

$\square$

### 3.2 Layer Propagation and Time Coarse-Graining

We now switch from propagation along a fixed running to propagation at the level of entire time slices. This second notion is intentionally stronger and less local. In the previous subsection, the purpose was to say: given a fault that already occurred, what is its effect at a later step of the same computation? Here the purpose is different: we want to reorganize the circuit itself, by commuting fault layers forward and grouping them into coarser effective layers. This is the mechanism behind the later renormalization claim for local stochastic noise.

In particular, local propagation keeps the ambient circuit fixed and changes the *description of the error*. Layer propagation, by contrast, changes the *presentation of the circuit* while preserving the implemented channel. This is why the two notions should not be merged into one definition: one is adapted to tracking deviations, while the other is adapted to comparing circuits related by time-unfolding.

**Definition 3.16** (Layer propagation). *Let  $C = \{u_i\}_{i=1}$  be a quantum circuit. For each time coordinate  $t$ , write  $U_t := C|_t$ . The family of non-empty  $t$ -cuts  $\{U_t\}_t$  is called the layer decomposition of  $C$ .*

*Let  $t < t'$  be such that  $U_t$  and  $U_{t'}$  are non-empty and  $U_s = \emptyset$  for every  $t < s < t'$ . The forward propagation of the layer  $U_t$  across the next layer  $U_{t'}$  is the operation that replaces the pair  $(U_t, U_{t'})$  by a pair  $(U_{t'}, V_{t \rightarrow t'})$  satisfying*

$$\prod_{u \in U_t} u \prod_{v \in U_{t'}} v = \prod_{v \in U_{t'}} v \prod_{w \in V_{t \rightarrow t'}} w.$$

*The layer  $V_{t \rightarrow t'}$  is called the propagation expression of  $U_t$  across  $U_{t'}$ .*

*More generally, if  $t < t'$ , the forward propagation of  $U_t$  to time  $t'$  is obtained by iterating the above operation through the successive non-empty cuts between times  $t$  and  $t'$ . The resulting propagated layer is denoted by  $V_{t \rightarrow t'}$  and is again called the propagation expression of  $U_t$  to time  $t'$ . The resulting circuit has layer decomposition*

$$\dots, U_{t-1}, U_t, U_{t+1}, \dots, U_{t'}, U_{t'+1}, \dots \mapsto \dots, U_{t-1}, U_{t+1}, \dots, U_{t'}, V_{t \rightarrow t'}, U_{t'+1}, \dots$$

*After propagation we update the time coordinates so that they agree with the new layer in which each gate is applied.*

**Claim 3.17.** *Assume that every gate in  $C$  acts on at most  $\Delta$  qubits. Then every circuit obtained from  $C$  by forward layer propagation also consists of gates acting on at most  $\Delta$  qubits.*

*Proof.* Propagating a gate  $u \in U_i$  across a layer  $U_{i+1}$  conjugates  $u$  by the product of the gates in  $U_{i+1}$  that intersect its support. Since the gates inside  $U_{i+1}$  are pairwise disjoint, each qubit in the support of  $u$  participates in at most one gate from  $U_{i+1}$ . Therefore the support of the propagated image of  $u$  is contained in the union of the supports of at most  $\Delta$  gates, each of arity at most  $\Delta$ , but only one such gate can be associated with each qubit of  $u$ . Consequently the propagated image still acts on at most  $\Delta$  wires. Applying this argument repeatedly proves the claim.  $\square$

**Definition 3.18** ( $C \sim_P C'$ ). For quantum circuits  $C$  and  $C'$ , we write  $C \sim_P C'$  if one can be obtained from the other by a finite sequence of layer propagations.

By construction,  $\sim_P$  preserves the implemented channel. Indeed, if  $C \sim_P C'$  and  $\rho$  is any mixed state on the input register, then

$$C \circ \rho = C' \circ \rho.$$

**Definition 3.19** (Noise channel). A noise channel  $\mathcal{N}_{\mathcal{E}}$  is a distribution over sets of fault locations.

**Definition 3.20** (Local stochastic noise channel). Let  $p \in (0, 1)$ . We say that the noise channel  $\mathcal{N}_{\mathcal{E}}$  is local stochastic with rate  $p$  if for every finite set of locations  $S \subset \mathbb{N} \times \mathbb{N}$ ,

$$\Pr_{\mathcal{E} \sim \mathcal{N}_{\mathcal{E}}} [S \subset \text{Loc}(\mathcal{E})] \leq p^{|S|}.$$

Given a circuit  $C$  and a random fault set  $\mathcal{E} \sim \mathcal{N}_{\mathcal{E}}$ , the subjected circuit  $C[\mathcal{E}]$  is itself a random variable.

**Definition 3.21** (Witness family in the backward light cone). Let  $W$  be a propagation expression obtained from a block of  $c$  layers of a noisy circuit after propagating all even fault layers to the end of the block. For a subset  $S \subset \text{Loc}(W)$ , we define the witness family of  $S$ , denoted by  $\mathcal{W}(S)$ , to be the collection of all minimal sets

$$S' \subset \Lambda(S)$$

such that there exists a fault pattern containing  $S'$  whose propagation produces all the faults at the locations in  $S$ . Here minimality is with respect to inclusion.

**Claim 3.22.** Let  $c \geq 2$  be even, let  $C$  be a depth- $c/2$  circuit whose gates have arity at most  $\Delta$ , and let  $C[\mathcal{E}]$  be the circuit obtained by inserting the faults of  $\mathcal{E}$  between the computational layers. Write the layer decomposition of  $C[\mathcal{E}]$  as

$$U_0, U_1, \dots, U_c,$$

where the even layers are fault layers and the odd layers are computational layers. Propagate the fault layers  $U_2, U_4, \dots, U_{c-2}$  forward beyond  $U_{c-1}$ , in reverse order, and denote by  $V^{(1)}$  the resulting propagation expression obtained by grouping together those propagated layers with the terminal fault layer  $U_c$ . Then for every  $S \subset \text{Loc}(V^{(1)})$  the witness family  $\mathcal{W}(S)$  is non-empty, and every element  $S' \in \mathcal{W}(S)$  satisfies

$$S' \subset \Lambda(S) \cap \bigcup_{k=0}^{c/2} U_{2k}$$

and

$$|S'| \geq \frac{|S|}{\Delta^c}.$$

Consequently,

$$\{S \subset \text{Loc}(V^{(1)})\} \subset \bigcup_{S' \in \mathcal{W}(S)} \{S' \subset \text{Loc}(\mathcal{E})\}.$$

*Proof.* Suppose that the event  $\{S \subset \text{Loc}(V^{(1)})\}$  occurs. Then there exists at least one set of original fault locations whose propagation produces all the faults in  $S$ . Among all such sets choose one that is minimal with respect to inclusion, and denote it by  $S'$ . By construction,  $S' \in \mathcal{W}(S)$ , so the witness family is non-empty.

Since every element of  $S$  is obtained by propagating some original fault through at most  $c$  layers, and propagation never leaves the backward light cone of the produced qubits, every location in  $S'$  lies in  $\Lambda(S) \cap \bigcup_{k=0}^{c/2} U_{2k}$ .

It remains to bound the size of  $S'$ . A single fault location can influence at most  $\Delta^c$  qubits in the final layer of the block, because at each of the at most  $c$  propagation steps the support can branch to at most  $\Delta$  qubits. Therefore any set of original faults capable of generating all elements of  $S$  must contain at least  $|S|/\Delta^c$  fault locations. In particular, this holds for the minimal producing set  $S'$ , so  $|S'| \geq |S|/\Delta^c$ .

Finally, whenever  $S \subset \text{Loc}(V^{(1)})$  occurs, at least one minimal producing set  $S' \in \mathcal{W}(S)$  is fully contained in the realized fault set  $\text{Loc}(\mathcal{E})$ . This proves the event inclusion.  $\square$

**Claim 3.23.** *Let  $\mathcal{N}_{\mathcal{E}}$  be a local stochastic noise channel with rate  $p$ , and let  $C$  be a quantum circuit whose gates have arity at most  $\Delta$ . Fix an even integer  $c$ . Then there exists a local stochastic noise channel  $\mathcal{N}_{\mathcal{E}_q}$  with rate*

$$q := \left(2^{H(\Delta^{-c})\Delta^c} p\right)^{\Delta^{-c}},$$

*such that*

$$C[\mathcal{E}]_1 \sim_P C[\mathcal{E}_q]_{c/2}.$$

*In particular, up to a constant depending only on  $\Delta$  and  $c$ , the rate  $q$  behaves like  $p^{\Delta^{-c}}$ .*

*Proof.* Partition the subjected circuit  $C[\mathcal{E}]_1$  into consecutive blocks of  $c$  layers. Inside each block, propagate all internal even fault layers to the end of the block, exactly as in Claim 3.22. Doing this block by block yields a new circuit  $C'$  in which each block of  $c/2$  computational layers is followed by a single coarse-grained fault layer. Therefore  $C' = C[\mathcal{E}']_{c/2}$  for a suitable random fault set  $\mathcal{E}'$ , and by construction

$$C[\mathcal{E}]_1 \sim_P C[\mathcal{E}']_{c/2}.$$

It remains to prove that  $\mathcal{E}'$  is local stochastic. Fix one coarse-grained propagation expression  $V^{(i)}$  and a subset  $S \subset \text{Loc}(V^{(i)})$ . By Claim 3.22, the event  $\{S \subset \text{Loc}(V^{(i)})\}$  implies that at least one witness set  $S' \in \mathcal{W}(S)$  is fully contained in the original fault set  $\text{Loc}(\mathcal{E})$ , and every such witness satisfies  $|S'| \geq |S|/\Delta^c$ . Hence

$$\begin{aligned} \Pr[S \subset \text{Loc}(V^{(i)})] &\leq \Pr\left[\bigcup_{S' \in \mathcal{W}(S)} \{S' \subset \text{Loc}(\mathcal{E})\}\right] \\ &\leq \sum_{S' \in \mathcal{W}(S)} \Pr[S' \subset \text{Loc}(\mathcal{E})]. \end{aligned}$$

The channel  $\mathcal{N}_{\mathcal{E}}$  is local stochastic with rate  $p$ , so each term is at most  $p^{|S'|}$ . Moreover, the backward light cone of each effective fault has size bounded by a constant depending only on  $\Delta$  and  $c$ , so the number of candidate witnesses of size  $\ell$  is at most

$$\binom{\Delta^c |S|}{\ell}.$$

Choosing  $\ell = \lceil |S|/\Delta^c \rceil$  and using the standard entropy bound

$$\binom{\Delta^c |S|}{|S|/\Delta^c} \leq 2^{H(\Delta^{-2c})\Delta^c |S|},$$

we obtain

$$\Pr[S \subset \text{Loc}(V^{(i)})] \leq \left(2^{H(\Delta^{-2c})\Delta^c} p\right)^{|S|/\Delta^c} = q^{|S|}.$$

Since this bound is uniform over all subsets  $S$  and all coarse-grained layers, the induced random set  $\mathcal{E}'$  is local stochastic with rate  $q$ . Setting  $\mathcal{E}_q = \mathcal{E}'$  completes the proof.  $\square$

## 4 The $(d, d')$ -Dimensional Toric Code

**Definition 4.1** ( $d$ -Dimensional Toric Complex). *For integers  $d$  and  $n$ , denote the group resulting from the  $d$ -directed power of the cyclic group of order  $n$  by  $\mathcal{G}_n^d = \mathbb{Z}_n^{\times d}$ , and denote the standard generating set of  $\mathcal{G}_n^d$  by  $S = \{1_i : i \in [d]\}$ . We define the  $d$ -dimensional toric complex to be the hypergraph obtained from the Cayley graph  $\text{Cay}(\mathcal{G}_n^d, S)$  by taking its vertices as the 0-faces and for any  $i \in [d-1]$  we define the  $i$ -faces as follow: First, for a vertex  $v \in \mathcal{G}_n^d$  and for a subset of generators  $S' \subset S$  of size  $|S'| = i$ , the  $i$ -face rooted at  $v$  and spanned by  $S'$ , denoted by  $\theta_{v,S'}$ , is:*

$$\theta_{v,S'} := \bigcup_{I \subset S'} \left\{ \left( \prod_{g \in I} g \right) v \right\}$$

*The  $i$ -faces of the complex are the collection of all the possible rooted spanned  $i$ -faces induced by  $\text{Cay}(\mathcal{G}_n^d)$ . We will denote them by  $\mathcal{F}_i$ .*

*Additionally, we name  $n$  and  $d$ , the side length and the dimension of the complex.*



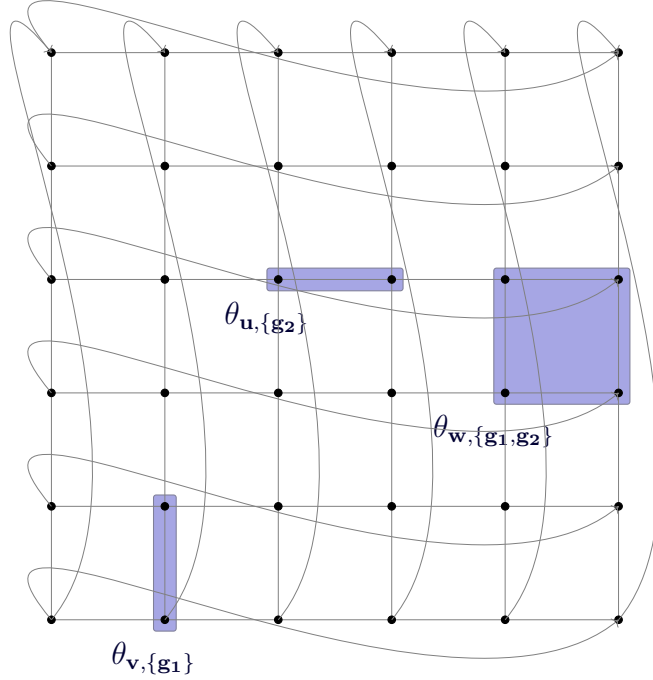


Figure 2: Here we consider a 2D Toric complex. We name the set of generators  $S = \{g_1, g_2\}$ , where  $g_1$  is the generator that sends us one step in the north direction, and  $g_2$  sends us in the east direction. For vertices  $v, u, w$ , we mark in blue three faces that are rooted at them.

**Definition 4.2** (Positive Edges and Cubes). *For  $u, v \in \mathcal{G}_n^d$ , and  $S'_1, S'_2 \subset [d]$ , with sizes  $|S'_1| = |S'_2| = i$ , we say that the  $i$ -faces  $\theta_{v,S'_1}$  and  $\theta_{u,S'_2}$  are adjacent if the intersection  $\theta_{v,S'_1} \cap \theta_{u,S'_2}$  is an  $i - 1$ -face. In addition, if  $\theta_1$  and  $\theta_2$  are  $i$  and  $i - 1$ -faces such that  $\theta_2 \subset \theta_1$ , then we say that  $\theta_2$  is a positive edge relative to face  $\theta_1$  if they are rooted at the same vertex. Furthermore, we say that  $\theta_1$  is a positive cube of  $\theta_2$ . When the  $i$ -face is clear from the context, we will abbreviate and say that  $\theta_2$  is positive.*

**Example 4.3.** *For example, let  $v, u \in \mathcal{G}_n^d$  and  $g_1 \neq g_2 \in S$ . Consider the 2-face  $\theta = \{v, g_1v, g_2g_1v, g_2v\}$ . Then, for  $x, y \in \mathcal{G}_n^d$ , we say that an edge (1-face)  $\{x, y\}$  is positive relative to the face  $\theta$  if  $x = v$  and  $y$  is either  $g_1v$  or  $g_2v$ .*

We denote the complex by  $G = (V, E, F)$ , where  $V$ ,  $E$ , and  $F$  are the 0, 1, and 2 faces.

Although the present paper is not organized in the language of chain complexes, the boundary operators below are the standard ones for toric codes. We use them because they give a compact description of the local constraints and make the CSS

structure transparent. We do not need the full homological formalism here, but it remains the natural background framework for the code family.

**Definition 4.4** (Assignments on a toric complex). *Let  $\mathcal{T}$  be a  $d$ -dimensional toric complex. For each  $i$ , the set of  $i$ -faces induces a vector space  $\mathbb{F}_2^{|\mathcal{F}_i|}$ . An element  $z \in \mathbb{F}_2^{|\mathcal{F}_i|}$  is called an assignment on the  $i$ -faces of  $\mathcal{T}$ .*

*For a vertex  $v$  and a subset of generators  $S' \subset S$  of size  $|S'| = i$ , let  $\theta_{\mathbf{v}, S'}$  denote the standard basis vector corresponding to the  $i$ -face  $\theta_{v, S'}$ . Thus the family*

$$\{\theta_{\mathbf{v}, S'} : v \in \mathcal{F}_0, S' \subset S, |S'| = i\}$$

*is the standard coordinate basis of  $\mathbb{F}_2^{|\mathcal{F}_i|}$ .*

*Let  $z$  be an assignment on the  $i$ -faces. Let  $v_1, \dots, v_k \in \mathcal{F}_0$  and  $S'_1, \dots, S'_k \subset S$  be such that  $\theta_{v_1, S'_1}, \theta_{v_2, S'_2}, \dots, \theta_{v_k, S'_k}$  are precisely the  $i$ -faces in the support of  $z$ , namely:*

$$z = \sum_{i=1}^k \theta_{\mathbf{v}_i, S'_i}$$

*We refer to  $\theta_{v_1, S'_1}, \theta_{v_2, S'_2}, \dots, \theta_{v_k, S'_k}$  as the collection of faces that form  $z$ , or briefly, the faces form  $z$ . For  $i > 0$ , we define the linear map  $\partial : \mathbb{F}_2^{|\mathcal{F}_i|} \rightarrow \mathbb{F}_2^{|\mathcal{F}_{i-1}|}$  such that*

$$\partial \theta_{\mathbf{v}, S'} := \sum_{g \in S'} \theta_{\mathbf{v}, S'/g} + \sum_{g \in S'} \theta_{\mathbf{g}\mathbf{v}, S'/g}$$

*For  $i < d$ , we define the linear map  $\partial^* : \mathbb{F}_2^{|\mathcal{F}_i|} \rightarrow \mathbb{F}_2^{|\mathcal{F}_{i+1}|}$  such that*

$$\partial^* \theta_{\mathbf{v}, S'} := \sum_{g \in S/S'} \theta_{\mathbf{v}, S' \cup g} + \sum_{g \in S'} \theta_{\mathbf{g}^{-1}\mathbf{v}, S' \cup g}$$

*We define the restriction of  $z$  to a vertex  $v$  to be the linear map  $|_v : \mathbb{F}_2^{|\mathcal{F}_i|} \rightarrow \mathbb{F}_2^{|\mathcal{F}_i|}$  such that:*

$$\theta_{\mathbf{u}, S'}|_v := \begin{cases} \theta_{\mathbf{u}, S'} & v \in \theta_{\mathbf{u}, S'} \\ 0 & \text{else} \end{cases}$$

*We define the front of  $z$  to a vertex  $v$  to be the linear map  $|_{v+} : \mathbb{F}_2^{|\mathcal{F}_i|} \rightarrow \mathbb{F}_2^{|\mathcal{F}_i|}$  such that:*

$$\theta_{\mathbf{u}, S'}|_{v+} := \begin{cases} \theta_{\mathbf{u}, S'} & u = v \\ 0 & \text{else} \end{cases}$$

*We say that an assignment  $z$  is connected if the graph that is induced by taking the faces that support  $z$  as vertices and defining the edges to be the adjacency relation between them is connected. We define the connected components of  $z$  to be its subsets such that each of them is a connected assignment. For a  $j$ -face  $f$ , we say that  $f \in z$  if  $z$  has a support on  $\theta_{\mathbf{v}, S'}$  such that  $f \in \theta_{v, S'}$ . Consider an assignment  $z \in \mathbb{F}_2^{|\mathcal{F}_i|}$  and a*

vertex  $v \in \mathcal{G}_n^d$ . We say that  $z$  is a rooted assignment at vertex  $v$  if there are subsets  $S'_1, \dots, S'_k \subset S^{\times k}$  such that each of  $S'_j$  is at size  $i$  and  $z$  is decomposed as:

$$z = \sum_j^k \theta_{\mathbf{v}, \mathbf{S}'_j}$$

Put differently,  $z$  is the result of taking a collection of  $i$ -faces that are rooted at  $v$ .

**Claim 4.5** (CSS structure). *For every  $i$ , the maps  $\partial: \mathbb{F}_2^{|\mathcal{F}_i|} \rightarrow \mathbb{F}_2^{|\mathcal{F}_{i-1}|}$  and  $\partial^*: \mathbb{F}_2^{|\mathcal{F}_i|} \rightarrow \mathbb{F}_2^{|\mathcal{F}_{i+1}|}$  satisfy the usual orthogonality relation between boundary and coboundary operators. Consequently, the  $X$ -checks defined by  $\partial$  and the  $Z$ -checks defined by  $\partial^*$  commute, and therefore the resulting toric code is a CSS code.*

*Proof.* It is enough to check the claim on basis vectors. For a basis vector  $\theta_{\mathbf{v}, \mathbf{S}'}$ , the appendix calculation shows that

$$\partial(\partial\theta_{\mathbf{v}, \mathbf{S}'}) = 0.$$

The same cancellation argument applies dually to the coboundary operator. Equivalently, every  $d' - 1$  face and every  $d' + 1$  face overlap on an even number of  $d'$ -faces, so the corresponding  $X$ - and  $Z$ -checks commute. This is exactly the CSS condition.  $\square$

We will use only this CSS property and the local geometry of the code; standard facts about distance and rate may be found in the toric-code literature, for example in [Den+02].

**Definition 4.6** ( $(d, d')$  Toric Code). *Let  $d, d'$  be integers such that  $1 < d' < d$ . For any integer  $n$ , we construct the  $n$ th instance of the quantum code family  $(d, d')$  Toric Code as follows: Let  $G = (\mathcal{F}_0, \dots, \mathcal{F}_d)$  be the  $d$ -dimensional toric complex obtained from  $\mathcal{G}_n^d$  as defined in Definition 4.1. We associate the  $(q)$ bits with the  $\mathcal{F}_{d'}$ , the  $X$ -checks with the  $\mathcal{F}_{d'-1}$ , and the  $Z$ -checks with the  $\mathcal{F}_{d'+1}$ . An  $X$ -check,  $c_x$ , is satisfied if the parity of  $(q)$ bits set on the  $d'$ -face containing  $c_x$  is even. Similarly, a  $Z$ -check,  $c_z$ , is satisfied if the parity, in the Hadamard basis, of the  $(q)$ bits set on the  $d'$ -faces contained in  $c_z$  is even.*

**Claim 4.7.** *For any generator subset  $S'$  of size  $d'$ , denote by  $x_{S'}$  and  $z_{S'}$  the following assignments:*

$$x_{S'} := \sum_{u \in \langle S' \rangle} \theta_{\mathbf{u}, \mathbf{S}'} \quad z_{S'} := \sum_{u \in \langle S/S' \rangle} \theta_{\mathbf{u}, \mathbf{S}'}$$

*Then  $x_{S'}$  and  $z_{S'}$  are binary representations of anticommuting logical codewords of the  $(d, d')$ -Toric code. In particular,  $x_{S'} \in \mathcal{C}_X / \mathcal{C}_Z^\perp$ ,  $z_{S'} \in \mathcal{C}_Z / \mathcal{C}_X^\perp$ , and  $x_{S'} z_{S'} = 1$ . In addition, let  $X_{S'}$  and  $Z_{S'}$  be the Pauli matrices obtained by multiplying each non-trivial coordinate of them by  $X$  or  $Z$ , respectively.*

*Proof.* By definition  $x_{S'}$  and  $z_{S'}$  are binary assignments on the  $d'$ -dimensional faces. We start by showing that  $x_{S'} \in \mathcal{C}_X$  and  $z_{S'} \in \mathcal{C}_Z$ :

$$\begin{aligned}
\partial^- \sum_{u \in \langle S' \rangle} \theta_{u, S'} &= \sum_{u \in \langle S' \rangle} \sum_{g \in S'} \theta_{u, S'/g} + \theta_{gu, S'/g} \\
&= \sum_{g \in S'} \sum_{u \in \langle S' \rangle} \theta_{u, S'/g} + \sum_{u \in \langle S' \rangle} \theta_{gu, S'/g} \\
&= \sum_{g \in S'} \sum_{u \in \langle S' \rangle} \theta_{u, S'/g} + \sum_{u \in \langle S' \rangle} \theta_{u, S'/g} = 0 \\
\partial^+ \sum_{u \in \langle S' \rangle} \theta_{u, S/S'} &= \sum_{u \in \langle S' \rangle} \sum_{g \in S'} \theta_{u, S/S' \cup g} + \theta_{g^{-1}u, S/S' \cup g} \\
&= \sum_{g \in S'} \sum_{u \in \langle S' \rangle} \theta_{u, S/S' \cup g} + \sum_{u \in \langle S' \rangle} \theta_{g^{-1}u, S/S' \cup g} \\
&= \sum_{g \in S'} \sum_{u \in \langle S' \rangle} \theta_{u, S/S' \cup g} + \sum_{u \in \langle S' \rangle} \theta_{u, S/S' \cup g} = 0
\end{aligned}$$

Thus  $x_{S'} \in \mathcal{C}_X$  and  $z_{S'} \in \mathcal{C}_Z$ , now for showing that they are not binary representations of stabilizers, it's enough to show they admit no vanishing product.

$$x_{S'} z_{S'} = \sum_{u \in \langle S' \rangle} \theta_{u, S'} \sum_{u \in \langle S/S' \rangle} \theta_{u, S'} = \theta_{e, S'} \theta_{e, S'} = 1$$

□

**Definition 4.8** (The Transpose Map). *Let  $d, d'$  be integers, and let  $\mathcal{G}$  be a  $(d, d')$ -Toric complex generated by the generator set  $S$ . We define the transpose map  $\phi : \mathcal{F}^{d'} \rightarrow \mathcal{F}^{d-d'}$  by acting on the basis elements as follows:*

$$\phi(\theta_{v, S'}) \rightarrow \theta_{v^{-1}, S/S'}$$

*Notice that for  $d' = d - d'$ , the transpose map is a permutation over the bits.*

**Definition 4.9** (Hadamard-Type Gate  $H_\phi$ ). *For  $d' = d - d'$ , we define the logical Hadamard-type gate  $H_\phi : L \rightarrow L$  as follows, for any  $S' \subset S$ , of size  $d'$ :*

$$\begin{aligned}
H_\phi(X_{S'}) &\rightarrow Z_{S/S'} \\
H_\phi(Z_{S'}) &\rightarrow X_{S/S'}
\end{aligned}$$

**[COMMENT]** Change the definition above such that it will be about moving to the dual code  $C_X/C_Z^\perp \rightarrow C_Z/C_X^\perp$ . And not about the logical Hadamard.

**Claim 4.10.** *The Hadamard-type gate  $H_\phi$  has a fold-transversal implementation by, first applying  $H^n$  over all the physical qubits, and then permuting them by the transpose map  $\phi$ , namely  $\hat{H}_\phi = \phi \circ H^n$ .*

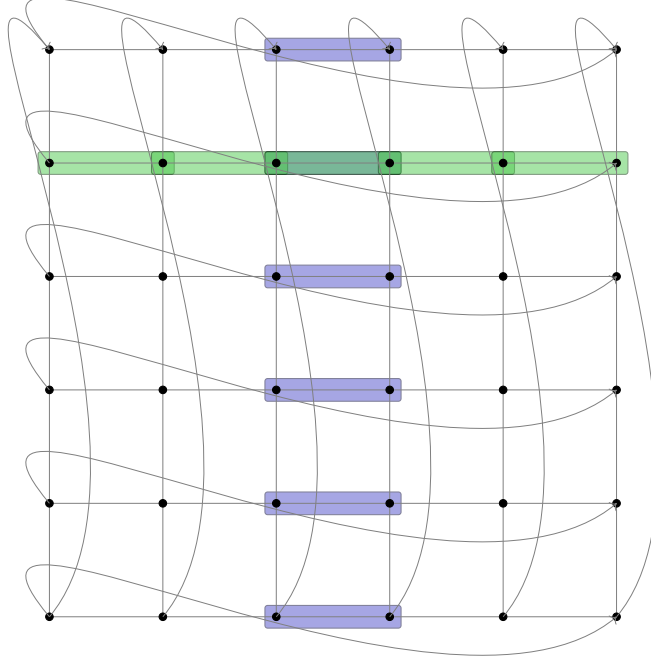


Figure 3: In blue and green are the binary presentations  $x_S$  and  $z_S$  of logical code words of the  $(2, 2)$ -Toric code. The edge  $\{(5, 4), (0, 4)\}$  is omitted for clarity (it should be a green edge that hovers over the green line).

*Proof.* Clearly, for any subset of generators  $S' \subset S$ , the map  $\phi$  sends  $x_{S'}$  to  $z_{S/S'}$ :

$$\phi(x_{S'}) = \phi\left(\sum_{u \in \langle S' \rangle} \theta_{u, S'}\right) = \sum_{u \in \langle S' \rangle} \theta_{u, S/S'} = z_{S/S'}$$

Moreover,  $\phi$  sends binary representations of  $Z$ -stabilizers to binary representations of  $X$ -stabilizers, and vice versa. To see this, consider a  $d' + 1$  dimensional face, and consider the image of the stabilizer it defines.

$$\begin{aligned} \phi(\partial^- \theta_{\mathbf{v}, S'}) &= \phi\left(\sum_{g \in S'} \theta_{\mathbf{v}, S'/g} + \theta_{\mathbf{g}\mathbf{v}, S'/g}\right) \\ &= \sum_{g \in S'} \theta_{\mathbf{v}^{-1}, (S/S') \cup g} + \theta_{\mathbf{g}^{-1}\mathbf{v}^{-1}, (S/S') \cup g} \\ &= \partial^+ \theta_{\mathbf{v}^{-1}, S/S'} \end{aligned}$$

And since  $\phi \circ \phi = I$ , we also have that  $\phi(\partial^+ \theta_{\mathbf{v}^{-1}, S/S'})$ . Thus,  $H^{\otimes n} \circ \phi$  sends  $Z$ -stabilizers

to  $X$ -stabilizers and vice versa, thereby preserving the code space. Combining this with the above,  $H^{\otimes n} \circ \phi$  realizes the logical form  $H_\phi$  in the  $(d, d/2)$ -Toric code.  $\square$

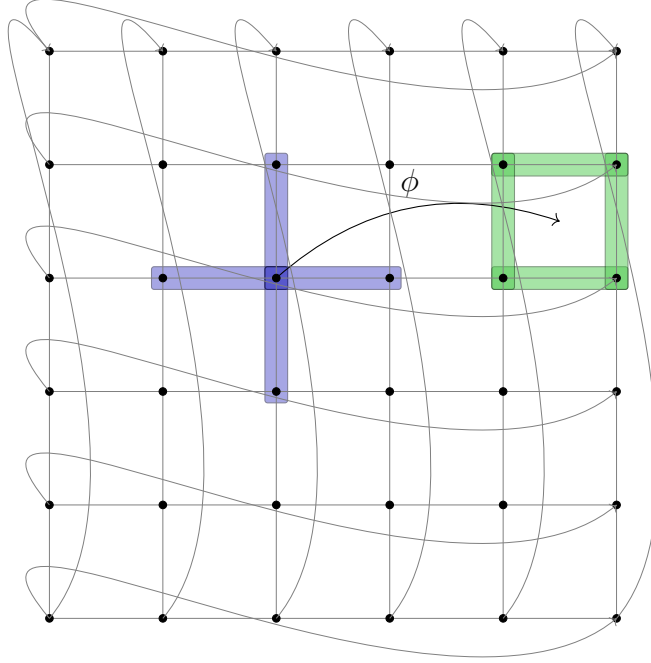


Figure 4: An outline of Example 4.11. The  $\phi$ -transpose sends  $Z$ -stabilizers to  $X$ -stabilizers and vice versa. Here we consider the  $(2, 1)$  Toric code; namely, the  $Z$ -stabilizers (parity checks) are set on the vertices, and the  $X$ -stabilizers (phase checks) are set on the squares. In blue and green, we have the edges corresponding to checks  $\partial^+ \theta_{(2,3),\{\}}^*$  and  $\theta_{(4,3),\{(0,1),(1,0)\}}$ . The example shows that indeed  $\phi$  maps between the two.

**Example 4.11.** Consider the  $(2, 1)$ -Toric code. Name the generators in  $S$  by  $g_1 = (1, 0)$  and  $g_2 = (0, 1)$ . Consider the check corresponding to the  $Z$ -stabilizer  $\partial^+ \theta_{(2,3),\{\}}^*$ .

$$\partial^+ \theta_{(2,3),\{\}}^* = \{\theta_{(2,3),\{(1,0)\}}, \theta_{(2,3),\{(0,1)\}}, \theta_{(1,3),\{(1,0)\}}, \theta_{(2,2),\{(0,1)\}}\}$$

The  $\phi$ -transpose map acts on it as follows:

$$\phi(\theta_{(2,3),\{(1,0)\}}) = \theta_{(4,3),\{(0,1)\}}$$

$$\phi(\theta_{(2,3),\{(0,1)\}}) = \theta_{(4,3),\{(1,0)\}}$$

$$\phi(\theta_{(1,3),\{(1,0)\}}) = \theta_{(5,3),\{(0,1)\}}$$

$$\phi(\theta_{(2,2),\{(0,1)\}}) = \theta_{(4,4),\{(1,0)\}}$$

What gives edges on a rectangle that converges with the bits on the support of the  $X$ -stabilizer  $\theta_{(4,3),\{(0,1),(1,0)\}}$ .

[COMMENT] Here, add that the measurement in the  $X$ -basis can be done using  $H^n$ , measurement, and then  $\log(n)$  classical depth.

[COMMENT] Add a corollary that state that we can perform a gate teleportations of  $S$  and  $H$ , with the resource states  $|S\rangle$  and  $|H\rangle$ ,  $\log(n)$  classical depth, and only transversal operation over the encoded register.

**Definition 4.12** (The Nice Encoding). *Consider  $(d, d/2)$ -Toric code and fix a subset  $S' \subset S$ , at size  $d'$ . We define the nice encoding to be the subsystem code, which uses  $x_{S'}$  to encode a single logical qubit. Namely, the logical codewords are:*

$$\begin{aligned} |\bar{0}\rangle &= |\mathcal{C}_Z^\perp\rangle \\ |\bar{1}\rangle &= |x_{S'} + \mathcal{C}_Z^\perp\rangle \end{aligned}$$

**Definition 4.13** (Decoding Gadget). *Let  $C$  be a quantum circuit, and let  $u$  be a gate in  $C$  with fan-in at most  $\Delta$ . We say that  $u$  is a decoding gadget if it has the following form:*

1. *The wires of  $u$  can be decomposed into two subsets  $A$  and  $B$  such that the wires in  $A$  are reset wires, and there exists an encoded register  $R$  in  $C$  such that the wires in  $B$  are all set in  $R$ .*
2. *For a set of faults  $\mathcal{E}$ , there is a Pauli gate  $u'$  that acts only on  $B$  such that the action of  $u$  in  $C[\mathcal{E}]$  equals  $u'$ . Put differently, the quantum circuit obtained from  $C[\mathcal{E}]$  by replacing  $u$  with  $u'$  equals  $C[\mathcal{E}]$ .*

**Definition 4.14** (Unitary Decoding Representation). *Let  $C = \{u_i\}_{i=1}$  be a quantum circuit, and let  $\mathcal{U} = \{u'_i\}_{i=1} \subset C$  be a subset of the gates in  $C$  that are decoding gadgets. For a set of faults  $\mathcal{E}$ , we define the unitary decoding representation of  $C[\mathcal{E}]$  to be the quantum circuit obtained by replacing each of the gates in  $\mathcal{U}$  with their corresponding Pauli gate according to  $\mathcal{E}$ .*

**Definition 4.15** (Register coordinate system). *Let  $C = \{u_i\}_i$  be a quantum circuit of width  $w$  with registers  $\mathcal{R} = R_1, \dots, R_k$ , each of length at most  $n$ . For each register  $R_i$ , define its identifier by  $\mathbf{1}_{R_i} = \mathbf{1}_i$ . We define the map*

$$\phi_{\mathcal{R}}: \mathbb{Z}_w \rightarrow \mathbb{Z}_R \times \mathbb{Z}_n$$

by setting

$$\phi_{\mathcal{R}}(x) = (\mathbf{1}_{R_j}, x'),$$

where  $R_j$  is the register containing  $x$ , and  $x'$  is the position of that qubit within  $R_j$ .

The presentation of  $C$  in the register coordinate system is obtained by replacing every spatial coordinate by its image under  $\phi_{\mathcal{R}}$ . Thus, if  $u_i = (g_i, l_i) \in C$  and the space-location part of  $l_i$  is  $l_{i,2} = (l_{i,2}^{(1)}, \dots, l_{i,2}^{(\Delta)})$ , then we replace it by

$$(\phi_{\mathcal{R}}(l_{i,2}^{(1)}), \dots, \phi_{\mathcal{R}}(l_{i,2}^{(\Delta)})).$$

We call the first coordinate of  $\phi_{\mathcal{R}}(x)$  the register coordinate and the second the inner coordinate.

## 5 Infinite Torics

**Definition 5.1** (Shifting in Registers System). *Consider the register coordinate system induced by a quantum circuit of width  $w$ , with  $R$  registers, each of length at most  $n$ . For an integer  $r \in \mathbb{Z}$ , we define the  $r$ -shifting function  $Sh_r: (\mathbb{Z}_R \times \mathbb{Z}_n)^{\times \Delta} \rightarrow (\mathbb{Z}_R \times \mathbb{Z})^{\times \Delta}$  to act on space-location coordinates as follows:*

$$Sh_r(l_1, \dots, l_k) = (Sh_r(l_1), \dots, Sh_r(l_k))$$

$$\text{Where } Sh_r(l_i) = \begin{cases} l_i + r & \text{if } l_i \text{ is an inner coordinate} \\ l_i & \text{else} \end{cases}$$

**Definition 5.2.** *Let  $n$  be an integer, and let  $C = \{u_i\}_{i=1}$  be a quantum circuit with registers  $\mathcal{R} = R_1, \dots, R_k$  such that each register  $R_i$  is a toric encoding with a side length  $n$ . In addition, all the decoding gadgets of  $C$  are sweep rule gadgets; let us denote them by  $\mathcal{U}$ . We define the  $\infty$ -extension of  $C$ , denoted by  $C^\infty$ , as follows:*

1. *For a register  $R_i \in \mathcal{R}$ , denote by  $d_i, d'_i$  the dimension of the toric complex that induces the code, and the dimension of the faces that are associated with the bits. Each register  $R_i$  in  $\mathcal{R}$  is mapped to a register  $R'_i$ , which is a  $(d_i, d'_i)$ -dimensional, infinite side length, toric encoding. Since the mapping between registers is one-to-one, we use the identifier  $\mathbf{1}_{R_i}$  to identify also  $R'_i$ .*
2. *Each gate  $u_i \in C/\mathcal{U}$  is mapped to:*

$$u_i = (g_i, l_i) \mapsto \bigcup_{j=-\infty}^{\infty} \{(g_i, (Sh_{jn}(l_i)))\}$$

3. *Each gate  $u \in \mathcal{U}$  is mapped to the collection of sweep rule gadgets  $\{v_j\}_{j=-\infty}^{\infty}$  such that each of them has the same time coordinate as  $u$ , is in the register that corresponds to the image of  $u$ 's register, and is rooted at  $\text{root}(u) + jn$ .*

For a set of faults  $\mathcal{E} = \{f_i\}_{i=1}$ , we denote by  $C^\infty[\mathcal{E}^\infty]$  the  $\infty$ -extension of  $C[\mathcal{E}]$ .

**Claim 5.3.** *Let  $u = (g, l)$ , and let  $v_0, v_{\pm 1}$  be its translates in the  $\infty$ -extension rooted at  $\text{root}(u)$  and  $\text{root}(u) \pm n$ . Then*

$$v_0 v_{\pm 1}|_{[w]} = u.$$

*Proof.* The gates  $v_0$  and  $v_{\pm 1}$  are copies of the same local Pauli operator acting on translates of the same finite pattern. When restricted to the fundamental domain  $[w]$ , all factors outside  $[w]$  disappear, and the remaining action coincides with the original gate  $u$ . Thus the product of the relevant translates restricts exactly to  $u$ .  $\square$

**Definition 5.4.** *For a quantum circuit  $C$ , of the form defined in Definition 5.2, and a set of faults  $\mathcal{E}$ , denote:*

$$\rho := C[\mathcal{E}] |0\rangle\langle 0| C[\mathcal{E}]^\dagger$$

$$\rho_\infty := C^\infty[\mathcal{E}^\infty] |0\rangle\langle 0| (C^\infty[\mathcal{E}^\infty])^\dagger$$



We say that a quantum circuit  $C$  is  $\infty$ -compatible if, for any set of faults  $\mathcal{E} = \{f_i\}_{i=1}$ , it holds that:

$$\rho = \mathbf{Tr}_{/[w]}(\rho_\infty)$$

**Claim 5.5.** *Let  $C$  be quantum circuit of the form defined in Definition 5.2. Then  $C$  is  $\infty$ -compatible.*

*Proof.* It is enough to prove the claim for circuits in their unitary decoding representation. We prove it by induction on the number of the gates.

1. Base. For an empty circuit,  $\rho_\infty$  is just the infinite string of zeros; thus, the restriction of it to  $[w]$  locations, namely  $\mathbf{Tr}_{/[w]}(\rho_\infty)$ , yields a single matrix element corresponds to the  $w$ -length string of zeros, which is exactly  $\rho$ .
2. Step. Assume the claim holds for every circuit with fewer than  $\tau$  gates, and consider a circuit  $C$  with  $\tau$  gates. Denote by  $C'$  the circuit obtained from  $C$  by erasing its last gate; then  $C'$  has  $\tau - 1$  gates. Denote by  $\rho'$  and  $\rho'_\infty$  the output states of  $C'[\mathcal{E}]$  and  $(C')^\infty[\mathcal{E}^\infty]$ , respectively. By the induction assumption we have:

$$\rho' = \mathbf{Tr}_{/[w]}(\rho'_\infty)$$

Denote the last gate in  $C$  by  $u$ , and by  $I = \{v_j\}_{j=-\infty}^\infty$  the collection of gates in  $C^\infty$  to which  $u$  is mapped. Let us split into cases, depending on whether  $u$  is or is not a decoding gate.

- (a) Suppose that  $u$  is not a decoding gate. Let  $g$  and  $l$  be the gate element and the location of  $u$ . By the definition of  $\infty$ -extension,  $I$  equals:

$$I = \bigcup_{j=-\infty}^\infty \{(g, (\text{Sh}_{jn}(l)))\}$$

So there is only one gate in  $I$ , corresponding to  $j = 0$ , that has support on qubits with spatial location in the range  $[w]$ . Denote that gate by  $v_0$ .

$$\begin{aligned} \mathbf{Tr}_{/[w]}(\rho_\infty) &= \mathbf{Tr}_{/[w]} \left( \prod_{j=-\infty}^\infty v_j \rho'_\infty \prod_{j=-\infty}^\infty v_j^\dagger \right) \\ &= v_0 \mathbf{Tr}_{/[w]} \left( \prod_{j=-\infty, j \neq 0}^\infty v_j \rho'_\infty \prod_{j=-\infty, j \neq 0}^\infty v_j^\dagger \right) v_0^\dagger \\ &= v_0 \mathbf{Tr}_{/[w]} \left( \prod_{j=-\infty, j \neq 0}^\infty v_j^\dagger \prod_{j=-\infty, j \neq 0}^\infty v_j \rho'_\infty \right) v_0^\dagger \\ &= v_0 \mathbf{Tr}_{/[w]}(\rho'_\infty) v_0^\dagger \\ &= v_0 \rho' v_0^\dagger \\ &= \rho \end{aligned}$$

- (b) In the case that  $u$  is a decoding gate, observe that there are at most two gates in  $I$  that have support on the qubits with space-location in  $[w]$ . If there is exactly one, then repeating the non-decoding gate case while setting this gate as  $v_0$  gives the desired result. Else, in the case where two gates act non-trivially on qubits at  $[w]$ , denote those gates by  $v_0, v_1$ . Since we assumed that  $C$  is given in its unitary decoding representation, it holds that  $v_0, v_1$  are Paulis, in particular a product operator. Denote their product decompositions by  $v_0 = \prod_k v_0^{(k)}$  and  $v_1 = \prod_k v_1^{(k)}$ . Thus, by repeating the non-decoding case, but extracting from the infinite product only the terms in  $v_0$  and  $v_1$  that act non-trivially at  $[w]$ , we get:

$$\text{Tr}_{/[w]}(\rho_\infty) = v_0 v_1|_{[w]} \rho' (v_0 v_1|_{[w]})^\dagger$$

Moreover, since  $v_0$  and  $v_1$  are translates of  $u$  in locations  $\text{root}(u)$  and  $\text{root}(u) \pm n$ , then by Claim 5.3, we have that  $u = v_0 v_1|_{[w]}$ ; therefore:

$$\begin{aligned} \text{Tr}_{/[w]}(\rho_\infty) &= v_0 v_1|_{[w]} \rho' (v_0 v_1|_{[w]})^\dagger \\ &= u \rho' u^\dagger \\ &= \rho \end{aligned}$$

□

The computation DAG lifts naturally to the  $\infty$ -extension: gates that arise as translates of the same local gate act on disjoint translated supports inside different periods, so they may be executed simultaneously. The same periodic lifting applies to the underlying geometric objects, passing from the finite toric complex to its infinite cover.

**Definition 5.6** (The standart embedding). *Consider the  $d$ -dimensional infinite grid  $\mathcal{G}^d$ . The standard embedding  $\mathcal{G}^d \rightarrow \mathbb{R}^d$  is given by fixing a vertex in  $\mathcal{G}^d$  to be sent to the origin and then mapping the generators of the grid to the standard basis. We extend notation as follows: for a vertex  $v \in \mathcal{G}^d$ , a generator  $g \in S$ , and a coordinate  $i \in [d]$ , such that under the embedding  $g \rightarrow i$ , we denote by  $v_i = v_g$  the  $i$ 'th coordinate of the image of  $v$ .*

**Definition 5.7** (Potential Walls). *We define the potential walls to be the  $d + 1$  functions  $L_1, L_2, \dots, L_{d+1}$ , from the vertices of  $\mathcal{G}_n^d$  to the reals as follow:*

1. *For any coordinate  $i \in [d]$ , we define  $L_i: \mathcal{G}^d \rightarrow \mathbb{R}$  as  $L_i(v) := v_i$ . In addition, for the generator  $g \in S$  which is mapped to  $i$ , i.e  $g \rightarrow i$ , we identify  $L_g = L_i$ .*
2. *We define  $L_{d+1}: \mathcal{G}^d \rightarrow \mathbb{R}$  by  $L_{d+1}(v) := \sum_{i=1}^d v_i$ .*

*Consider an assignment  $z$  over the faces. For a vertex  $v \in z$ , and a potential wall  $l \in \{L_1, \dots, L_{d+1}\}$ , we say that  $v$  is a local maximum of  $l$  in  $z$  if for any neighbor  $u$  of  $v$ , such that  $u \in z$ , we have  $l(v) \geq l(u)$ . We say that  $v$  is a strong local maximum if the inequality is strict, namely  $l(v) > l(u)$ . When the assignment  $z$  is clear from the context, we might omit it and briefly say that  $v$  is a local maximum of  $l$ .*

With the assistance of potential walls, we can discuss the endpoint of a bunch of bits, which will soon become error clusters.

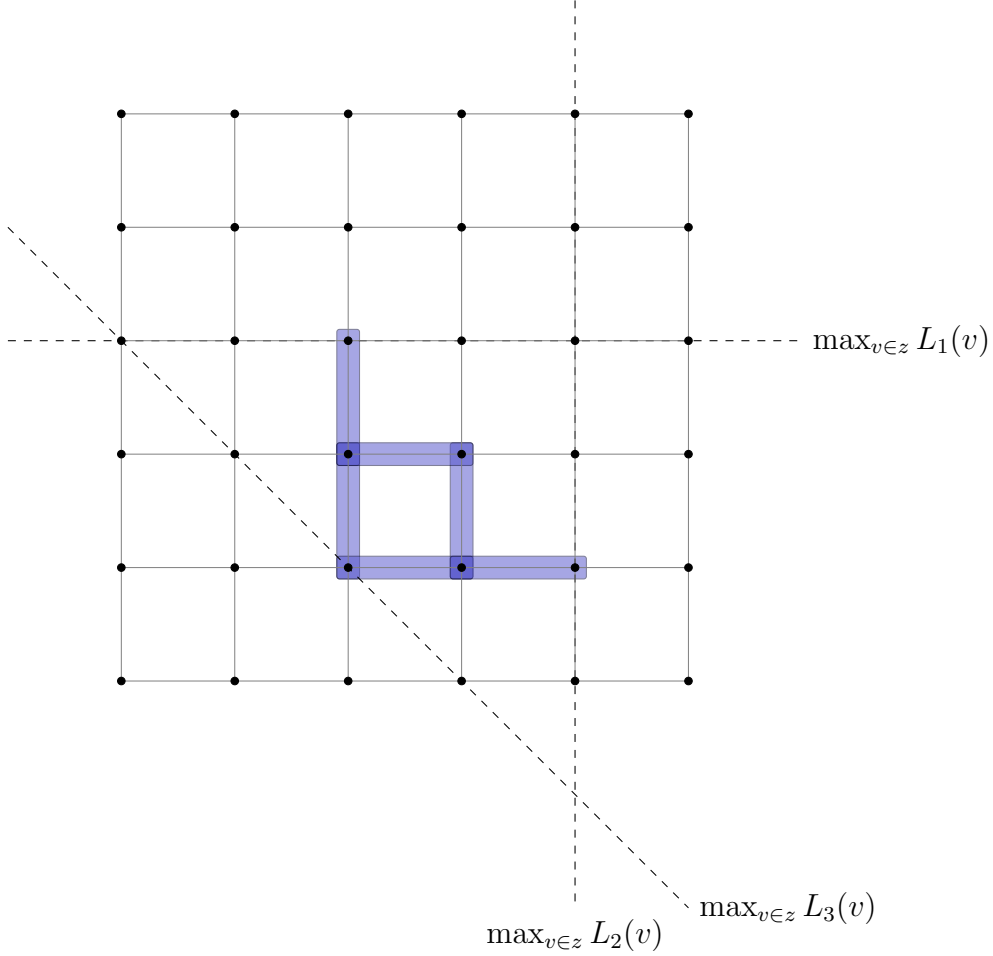


Figure 5: A graphical example of the maximal values of the potential walls. Here we consider the  $(2,1)$ -Toric code, namely the bits are set on the edges where the  $Z$ -stabilizers (parity checks) are set on the vertices. The grid is a finite  $6 \times 6$  patch of the infinite 2D plane. The edges marked in blue correspond to a bits assignment  $z$ . Each of the dashed lines marks the line of vertices whose  $L_i$  value converges with the maximal value reached by a vertex in  $z$ . Moving into the infinite plane enables us to determine those lines and draw the triangle that bounds  $z$ .

## 6 Sweep Rule

**Definition 6.1** (Sweep Rule). *Let  $z$  be an assignment on the  $d'$ -faces. The sweep rule decoding procedure at a vertex  $v \in \mathcal{G}_n^d$  is defined as follows:*

*Measure the checks rooted at  $v$  and look for a rooted assignment  $\tilde{z}$  at  $v$  such that  $(\partial\tilde{z})|_{v+} = \partial(z)|_{v+}$ . In other words, the  $X$ -checks rooted at  $v$  have the same syndromes for  $z$  and  $\tilde{z}$ . If such an assignment exists, flip  $\tilde{z}$ .*

**Definition 6.2** (Sweep cycle). *We define the sweep cycle to be the following procedure:*

1. *For each vertex, perform the sweep rule.*
2. *Apply the Hadamard transform  $\mathbf{H}^{\otimes n}$  followed by the  $\phi$ -transpose, and flip the positive direction.*
3. *Again, apply the sweep rule at each vertex.*
4. *Reverse stage 2 by reordering the qubits according to the  $\phi$ -transpose, and then apply the Hadamard transform  $\mathbf{H}^{\otimes n}$ . Flip the positive direction again.*

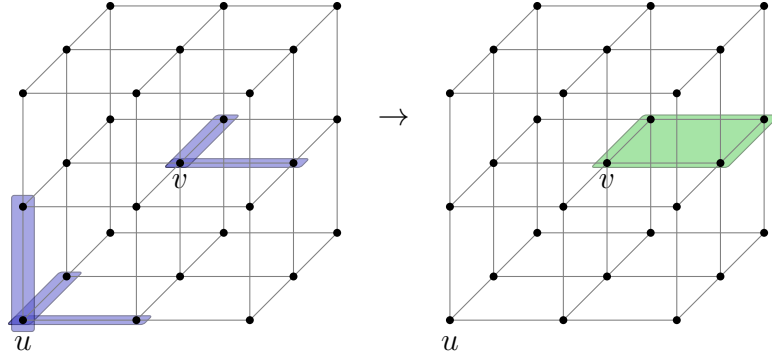


Figure 6: An example of applying the sweep rule within the  $(3,2)$ -Toric code. In the  $(3,2)$ -Toric code, bits are placed on the squares and  $Z$ -stabilizers (parity checks) on the edges. The view is restricted to two vertices,  $u$  and  $v$ . On the left, the unsatisfied positive checks of  $u$  and  $v$  are highlighted in blue. On the right, the bits to be flipped are marked in green. Given the syndrome, vertex  $v$  flips one of its positive faces, whereas for  $u$ , there is no subset of positive faces that, when flipped, decreases the number of local unsatisfied checks. Therefore,  $u$  flips no bit.

**Claim 6.3.** *The local gates that perform the sweep rule are decoding gadgets.*

*Proof.* A local sweep update acts on a constant-size neighborhood around a vertex, uses only local syndrome information, and may be implemented with fresh ancillas that are reset after the update. Any dependence on faults inside the gadget can therefore be pushed onto the data wires as an effective Pauli operator supported on the encoded register, while the reset ancillas carry no residual information. This is exactly the form required in the definition of a decoding gadget.  $\square$

## 7 Shrinking

The following two claims relate the local maximum points of  $L_1, \dots, L_d$  in an assignment  $z$  to the structure of the syndrome they observe. Later, we will use that relation to infer that the decoding step of the SWEEP rule can't spread the error to a vertex<sup>1</sup>

<sup>1</sup>To faces whose vertices have higher values of  $L_1, \dots, L_d$  than the current global maximum values.

with a higher value than the current global maximum of  $L_1, \dots, L_d$ . In other words, the error does not spread in the positive directions.

**Claim 7.1.** *Let  $z$  be an assignment, and recall that the vertices in  $\partial z$  are the set of vertices adjacent to unsatisfied checks induced by  $z$ . Let  $v$  be a vertex in  $\partial z$ , and let  $g$  be a generator in  $S$  such that  $v$  is a local maximum of  $L_g$  in  $\partial z$ . Then  $gv \notin \partial z$ .*

*Proof.* Suppose  $gv \in \partial z$ , then

$$L_g(gv) = (gv)_g = 1 + v_g = 1 + L_g(v)$$

In contradiction to  $v$  being a local maximum of  $L_g$  in  $\partial z$ .  $\square$

**Claim 7.2.** *Let  $z$  be an assignment, let  $v$  be a vertex in  $\partial z$ , and let  $g$  be a generator in  $S$  such that  $v$  is a local maximum of  $L_g$ . Then, for any check associated with a  $d' - 1$  face rooted at  $v$  that contains  $gv$ , it is satisfied.*

*Proof.* Assume, through contradiction, the existence of an unsatisfied check associated with a  $d' - 1$  positive face rooted at  $v$ , which contains  $gv$ . This implies  $gv \in \partial z$ , contradicting Claim 7.1.  $\square$

For the  $(d+1)$ th potential wall, we would like to have a stronger claim that implies the error cluster shrinks. For this, we start by showing that any error is equivalent, up to stabilizer addition, to an error whose left-corner edge sees a syndrome. We present two notations of local codes that describe the local view of a  $(d+1)$ th edge that sees no syndrome. They are the *stabilizers code at vertex  $v$*  and the *small code at vertex  $v$* . The first corresponds to stabilizers rooted at the vertex, while the second is the collection of local views on its positive faces that satisfy its positive checks. Then, in Claim 7.5, we consider a vertex which is a  $(d+1)$ th edge and doesn't see a syndrome, meaning that its local view is in its *small code*, and show that there is a codeword of its *stabilizers code* that agrees with its positive faces. Addition by that stabilizer yields a new assignment excluding  $v$ .

**Definition 7.3** (Stabilizers Code at Vertex  $v$ ). *We define stabilizer code at vertex  $v$ , denoted by  $Stab_v$ , as the restriction of the  $(d, d')$ -Toric code to the  $d'$ -dimensional faces such that their vertices are at a distance of at most one positive step in each direction from  $v$ . That is equivalent to the union of all the positive  $d'$ -dimensional faces of  $v$  with the  $d$ -dimensional faces of each of its sibling  $gv$ , excluding faces containing  $g$  as their generator. Namely:*

$$\begin{aligned} Stab_v := \{ & z : \partial^- z = 0 \text{ and} \\ & z \in \text{Span}(\{\theta_{\mathbf{v}, \mathbf{S}'} : \mathbf{S}' \subset S, |\mathbf{S}'| = d'\} \\ & \bigcup_{g \in S} \{\theta_{\mathbf{g}\mathbf{v}, \mathbf{S}'/\mathbf{g}} : \mathbf{S}' \subset S/g, |\mathbf{S}'| = d'\})\} \end{aligned}$$

The checks of the code, are of the following three types:

1. Checks that are rooted at  $v$ , each identified by choosing  $d - 1$  generators from  $S$ . Namely:

$$\{\theta_{\mathbf{v}, \mathbf{S}'} : S' \subset S, |S'| = d' - 1\}$$

For each check, the bits that connect to it, are given by restricting the coboundary of the check to bits domain of  $\text{Stab}_v$ :

$$(\partial\theta_{\mathbf{v}, \mathbf{S}'})|_{\text{Stab}_v} = \left( \sum_{g \in S/S'} \theta_{\mathbf{v}, \mathbf{S}' \cup \mathbf{g}} + \sum_{g \in S'} \theta_{\mathbf{g}^{-1}\mathbf{v}, \mathbf{S}' \cup \mathbf{g}} \right)|_{\text{Stab}_v} = \sum_{g \in S/S'} \theta_{\mathbf{v}, \mathbf{S}' \cup \mathbf{g}}$$

2. Checks are rooted at the positive sibling of  $v$ . Consider such a sibling, let's say  $gv$  (namely the vertex that is given by stepping in the direction  $g \in S$  from  $v$ ). Notice that any face rooted at  $gv$  that contains  $ggv$  cannot be contained in faces rooted at  $v$ . Thus, the checks of  $gv$  correspond to choosing subsets from  $S/g$ . Namely:

$$\bigcup_{g \in S} \{\theta_{\mathbf{g}\mathbf{v}, \mathbf{S}'} : S' \subset S/g, |S'| = d' - 1\}$$

And each check is supported by:

$$\begin{aligned} (\partial\theta_{\mathbf{g}\mathbf{v}, \mathbf{S}'})|_{\text{Stab}_v} &= \left( \sum_{g' \in S/S'} \theta_{\mathbf{g}\mathbf{v}, \mathbf{S}' \cup \mathbf{g}'} + \sum_{g' \in S'} \theta_{\mathbf{g}'^{-1}\mathbf{g}\mathbf{v}, \mathbf{S}' \cup \mathbf{g}'} \right)|_{\text{Stab}_v} \\ &= \left( \sum_{\substack{g' \in S/S' \\ g' \neq g}} \theta_{\mathbf{g}\mathbf{v}, \mathbf{S}' \cup \mathbf{g}'} \right) + \theta_{\mathbf{v}, \mathbf{S}' \cup \mathbf{g}} \end{aligned}$$

3. Checks that their roots are at a two-step distance from  $v$ , namely vertices of the form  $g, g' \in S$ , where  $g \neq g'$ . By the arguments presented in the second type, the checks are the  $d' - 1$  faces which do not have the generators on the path leading from  $v$  to them, i.e.,  $g, g'$ , in their generator set.

$$\bigcup_{g, g' \in S'} \{\theta_{\mathbf{g}'\mathbf{g}\mathbf{v}, \mathbf{S}'} : S' \subset S/\{g, g'\}, |S'| = d' - 1\}$$

And for each check, its support is:

$$\begin{aligned} (\partial\theta_{\mathbf{g}'\mathbf{g}\mathbf{v}, \mathbf{S}'})|_{\text{Stab}_v} &= \left( \sum_{g'' \in S/S'} \theta_{\mathbf{g}\mathbf{g}'\mathbf{v}, \mathbf{S}' \cup \mathbf{g}''} + \sum_{g \in S'} \theta_{\mathbf{g}''^{-1}\mathbf{g}\mathbf{g}'\mathbf{v}, \mathbf{S}' \cup \mathbf{g}''} \right)|_{\text{Stab}_v} \\ &= \theta_{\mathbf{g}\mathbf{v}, \mathbf{S}' \cup \mathbf{g}'} + \theta_{\mathbf{g}'\mathbf{v}, \mathbf{S}' \cup \mathbf{g}} \end{aligned}$$

**Definition 7.4** (Small Code at Vertex  $v$ ). For a vertex  $v$ , we denote by  $\mathcal{C}_v$  the small code at vertex  $v$ , which is defined to be the binary assignments over the bits ( $d'$  faces) rooted at  $v$  that satisfy the positive checks of  $v$ , namely:

$$\begin{aligned} \mathcal{C}_v &:= \{z : \partial^- z = 0 \text{ and} \\ &\quad z \in \text{Span}(\{\theta_{\mathbf{v}, \mathbf{S}'} : S' \subset S, |S'| = d'\})\} \end{aligned}$$

The checks of the code are exactly the first type checks of  $\text{Stab}_v$ .

**Claim 7.5.** Assume  $d = 4$  and  $d' = 2$ . Let  $v$  be a vertex. For any  $z \in \mathcal{C}_v$ , there is a stabilizer  $w \in \text{Stab}_v$  such that  $z = w|_v$ ; namely,  $z$  and  $w$  agree on the faces rooted at  $v$ .

*Proof.* We argue that the top six rows of the generating matrix of  $\text{Stab}_v$  are exactly the generating matrix of  $\mathcal{C}_v$ . This means that any codeword of  $\text{Stab}_v$  is an extension of a codeword of  $\mathcal{C}_v$ . Denote by  $H_{\mathcal{C}_v}$  and  $H_{\text{Stab}_v}$  the parity check matrices of  $\mathcal{C}_v$  and  $\text{Stab}_v$  respectively. Similarly, denote by  $G_{\mathcal{C}_v}$  and  $G_{\text{Stab}_v}$  their generating matrices. The parity check matrices are:

$$H_{\mathcal{C}_v} = \begin{bmatrix} 1 & 1 & 1 & 0 & 0 & 0 \\ 1 & 0 & 0 & 1 & 1 & 0 \\ 0 & 1 & 0 & 1 & 0 & 1 \\ 0 & 0 & 1 & 0 & 1 & 1 \\ 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 \end{bmatrix} \quad H_{\text{Stab}_v} = \begin{bmatrix} 1 & 1 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 1 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 1 & 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 1 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 & 1 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 1 & 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & 0 & 1 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 & 0 & 0 & 0 & 1 & 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 0 & 0 & 0 & 0 & 0 & 1 & 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 1 & 1 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 & 1 & 0 \\ 0 & 0 & 0 & 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 & 0 & 1 \\ 0 & 0 & 0 & 0 & 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 & 1 \\ 0 & 0 & 0 & 0 & 0 & 0 & 1 & 0 & 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 & 0 & 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 \end{bmatrix}$$

Where we mark in blue, brown, and red the first, second, and third types of checks.

$$G_{\mathcal{C}_v} = \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 1 & 1 & 0 \\ 0 & 0 & 1 \\ 1 & 0 & 1 \\ 0 & 1 & 1 \end{bmatrix} \quad G_{\text{Stab}_v} = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 1 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 1 & 0 & 1 & 0 \\ 0 & 1 & 1 & 0 \\ 0 & 0 & 0 & 1 \\ 1 & 0 & 0 & 1 \\ 0 & 1 & 0 & 1 \\ 0 & 0 & 0 & 1 \\ 1 & 0 & 0 & 1 \\ 0 & 0 & 1 & 1 \\ 0 & 0 & 0 & 1 \\ 0 & 1 & 0 & 1 \\ 0 & 0 & 1 & 1 \\ 1 & 0 & 0 & 1 \\ 0 & 1 & 0 & 1 \\ 0 & 0 & 1 & 1 \end{bmatrix}$$

□

**Conjecture 7.6.** *For any integers  $d$  and  $d' < d$ ,  $G_{\mathcal{C}_v}$  is contained in  $G_{\text{Stab}_v}$ . In particular, Claim 7.5 holds for any dimension.*

**Claim 7.7.** *Let  $z$  be a finite assignment. Suppose that*

$$\max \{L_{d+1}(u) : u \in z\} > \max \{L_{d+1}(u) : u \in \partial^\pm z\}$$

*Then there is  $\tilde{z} \sim_{\mathcal{C}_X} z$  such that:*

$$\max \{L_{d+1}(u) : u \in \tilde{z}\} \leq \max \{L_{d+1}(u) : u \in z\} - 1$$

*Proof.* Let  $v_1, v_2, \dots, v_k$  be the vertices in  $z$  that achieve the maximum for  $L_{d+1}$ , namely  $v_1, v_2, \dots, v_k = \arg \max_{v \in z} L_{d+1}(v)$ , and assume that  $v_i \notin \partial^\pm z$  for any  $i \in [k]$ .

Consider the  $i$ th vertex  $v_i$ . By definition, since  $v_i \notin \partial^\pm z$ , we have  $\partial^\pm z|_{v_i} = 0$ , and since  $v_i$  is a maximum point of  $L_{d+1}$  in  $z$ , it is also a local maximum, and therefore  $z|_{v_i+} = z|_{v_i}$ . Combining the two, we get that  $z|_{v_i}$  is a codeword of the small code at  $v_i$ , namely  $z|_{v_i} \in \mathcal{C}_{v_i}^\pm$ . Thus, by Claim 7.5, there is a stabilizer  $w_i \in \text{Stab}_{v_i}^\pm$  such that  $w_i$  and  $z$  agree on the positive faces of  $v_i$ , namely  $w_i|_{v_i} = z|_{v_i}$ .

Set  $\tilde{z} \leftarrow z + \sum_i w_i$ . Since  $\sum_i w_i$  is a stabilizer, we have  $\tilde{z} \sim_{\mathcal{C}_X} z$ . In addition, for any  $j \neq i$ , it follows that  $v_j \notin w_i$ . Otherwise, there exists  $S' \subset S$  such that  $v_j \in \theta_{v_i, S'}$ , and therefore  $L_{d+1}(v_j) > L_{d+1}(v_i)$ , in contradiction to  $v_i$  and  $v_j$  being both maximum points for  $L_{d+1}$  in  $\partial^\pm z$ . Thus, we have:

$$\tilde{z}|_{v_i} = (z + \sum_i w_i)|_{v_i} = z|_{v_i} + (z + w_i)|_{v_i} = 0$$



Namely, for any  $i$ , the  $i$ th vertex  $v_i$  is not in  $\tilde{z}$ . Hence, the vertex domain of  $\tilde{z}$  is contained in the union of the vertices of  $z$  with the vertices of  $w_1, w_2, \dots, w_k$ , substituting  $v_1, v_2, \dots, v_k$ . Overall, we get:

$$\begin{aligned} \max \{L_{d+1}(u) : u \in \tilde{z}\} &\leq \max \left\{ L_{d+1}(u) : u \in z \bigcup_i w_i / \bigcup_i v_i \right\} \\ &\leq \max \{L_{d+1}(u) : u \in z\} - 1 \end{aligned}$$

□

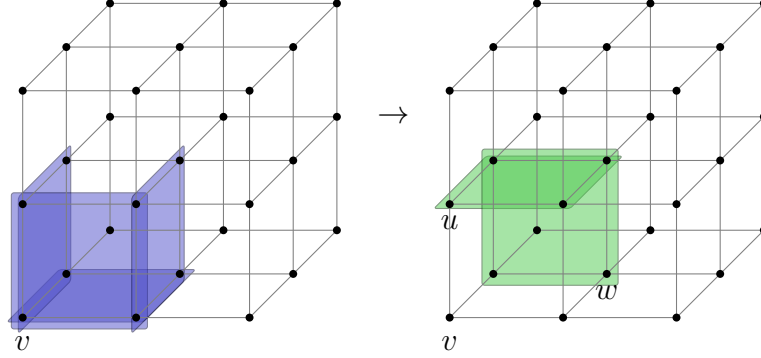


Figure 7: In blue, we have an assignment where the vertex achieving the minimum of  $L_{d+1}$ , denoted by  $v$ , does not see any unsatisfied checks in its positive local view. The green faces represent an assignment, equivalent to the blue up to stabilizer, such that any local maximum of  $L_{d+1}$  (vertices  $u$  and  $w$ ) sees a non-trivial syndrome in its positive local view.

**Claim 7.8.** *Let  $z$  be a finite assignment. Then there is  $\tilde{z} \sim_{\mathcal{C}_X} z$  such that*

$$\max \{L_{d+1}(u) : u \in \tilde{z}\} = \max \{L_{d+1}(u) : u \in \partial^\pm z\}$$

*Proof.* Let  $z$  be a finite assignment, and let  $k$  be an integer such that  $k \geq 1$  and

$$\max \{L_{d+1}(u) : u \in z\} = \max \{L_{d+1}(u) : u \in \partial^\pm z\} + k$$

For an integer  $l \leq k$ , consider the assignments  $\tilde{z}_0, \tilde{z}_1, \dots, \tilde{z}_l$  defined as follow:

- The first element,  $\tilde{z}_0 = z$ .
- If the  $i - 1$ th element satisfies

$$(\star) \quad \max \{L_{d+1}(u) : u \in \tilde{z}_{i-1}\} > \max \{L_{d+1}(u) : u \in \partial^\pm \tilde{z}_{i-1}\}$$

Then define the  $i$ th element,  $\tilde{z}_i$ , to be the result of applying the construction, given in Claim 7.7, on  $\tilde{z}_{i-1}$ , namely  $\partial \tilde{z}_{i+1} = \partial \tilde{z}_i$  and

$$\max \{L_{d+1}(u) : u \in \tilde{z}_i\} \leq \max \{L_{d+1}(u) : u \in \tilde{z}_{i-1}\} - 1$$

If the  $i - 1$ th element doesn't satisfies  $\star$ , then set  $l = i - 1$ .

- If the  $k$ th element was defined, set  $l = k$ .

Since  $\sim_{C_X}$  is a transitive relation, we have that for any  $i \in [l]$ ,  $z \sim_{C_X} \tilde{z}_i$ . If  $l \neq k$ , then there exists  $\tilde{z}_i$  such that  $\tilde{z}_i \sim_{C_X} z$  and  $\tilde{z}_i$  satisfies  $\star$ , namely by setting  $\tilde{z} = \tilde{z}_i$ , we get the desired. So, it is left to handle the case where  $l = k$ . In that case, set  $\tilde{z} = \tilde{z}_k$ . By Claim 7.7:

$$\max \{L_{d+1}(u) : u \in \tilde{z}\} \leq \max \{L_{d+1}(u) : u \in \partial^\pm z\}$$

Yet, since  $\tilde{z} \sim_{C_X} z$ , it follows that  $\partial \tilde{z} = \partial z$ , So:

$$\max \{L_{d+1}(u) : u \in \partial^\pm z\} = \max \{L_{d+1}(u) : u \in \partial^\pm \tilde{z}\} \leq \max \{L_{d+1}(u) : u \in z\}$$

Therefore, we have the equality:

$$\max \{L_{d+1}(u) : u \in \tilde{z}\} = \max \{L_{d+1}(u) : u \in \partial^\pm z\}$$

□

**Claim 7.9.** *Let  $z$  be a finite assignment and let  $\xi$  be the result of the application of the Sweep rule on it. Then:*

1. For any  $i \in [d]$ :  $\max \{L_i(v) : v \in \partial z\} = \max \{L_i(v) : v \in \partial \xi\}$
2. And for  $i = d + 1$  :  $\max \{L_{d+1}(v) : v \in \partial z\} > \max \{L_{d+1}(v) : v \in \partial \xi\} + 1$

*Proof.* First, since the Sweep rule is invariant to addition by stabilizers, for any  $\tilde{z}$  such that  $\tilde{z} \sim_{C_X} z$ , the correction applied by the Sweep rule on  $\tilde{z}$  is the same as the application on  $z$ . Denote by  $\phi$  the correction, by  $\tilde{\xi}$  the result of applying the Sweep rule on  $\tilde{z}$ , and by  $w$  the stabilizer which is the difference between  $z$  and  $\tilde{z}$ , namely:

$$\begin{aligned}\xi &= z + \phi \\ \tilde{\xi} &= \tilde{z} + \phi \\ \tilde{z} &= z + w\end{aligned}$$

The  $\partial^\pm$  boundary of  $\tilde{\xi}$  equals:

$$\partial \tilde{\xi} = \partial (\tilde{z} + \phi) = \partial (z + \phi) = \partial \xi$$

So, in total, we have that for any  $\tilde{z}$  such that  $\tilde{z} \sim_{C_X} z$ , it holds that  $\partial \tilde{z} = \partial z$  and  $\partial \tilde{\xi} = \partial \xi$ . Therefore, showing that there exists  $\tilde{z} \sim_{C_X} z$  for which the claim holds proves the claim for  $z$ . By Claim 7.8, there is  $\tilde{z} \sim_{C_X} z$  such that:

$$\max \{L_{d+1}(u) : u \in \tilde{z}\} = \max \{L_{d+1}(u) : u \in \partial^\pm \tilde{z}\}$$

For such  $\tilde{z}$ , any maximum of  $L_{d+1}$  in  $\partial \tilde{z}$ , is also a maximum in  $\tilde{z}$ . Denote by  $v_1, \dots, v_k$  the maximum points in  $\partial \tilde{z}$ . Since they are maximum points in  $\tilde{z}$ , it holds that for each  $i \in [k]$ ,  $\tilde{z}|_{v_i} = \tilde{z}|_{v_i+}$ , and hence  $\partial \tilde{z}|_{v_i} = \partial \tilde{z}|_{v_i+}$ . Since  $\tilde{z}|_{v_i+}$  is an assignment

rooted at  $v_i$ , then  $v_i$  can suggest  $\tilde{z}|_{v_i+}$ , namely the condition in Sweep rule is satisfied for vertex  $v_i$ . Thus:

$$\partial\tilde{\xi}|_{v_i} = \partial\tilde{z}|_{v_i} + \partial\phi|_{v_i} = 0$$

Namely, for any  $i$ , the  $i$ th vertex  $v_i$  is not in  $\tilde{\xi}$ . For any vertex  $v$  denote by  $\phi_v$  the correction made by the vertex  $v$ , namely  $\phi = \sum_{v \in \partial\tilde{z}} \phi_v$ . Hence, the vertex domain of  $\tilde{\xi}$  is contained in the union of the vertices of  $\tilde{z}$  with the vertices of  $\cup_{v \in V} \phi_v$ , substituting maximum points  $v_1, v_2, \dots, v_k$ . Overall, we get:

$$\begin{aligned} \max \left\{ L_{d+1}(u) : u \in \partial\tilde{\xi} \right\} &\leq \max \left\{ L_{d+1}(u) : u \in \partial\tilde{z} \bigcup_{v \in \partial\tilde{z}} \phi_v / \bigcup_i v_i \right\} \\ &\leq \max \left\{ L_{d+1}(u) : u \in \partial\tilde{z} \right\} - 1 \end{aligned}$$

Let  $v$  be a vertex that is a maximum of  $L_g$  in  $\partial\tilde{z}$ , maximum points of  $L_g$  do not see syndrome at the  $g$  direction. If and:

$$\phi_v = \sum \theta_{\mathbf{v}, \mathbf{S}'_i}$$

By Claim 7.2  $\partial\tilde{z}|_{gv} = 0$ , Hence:

$$\begin{aligned} \partial\phi_v|_{gv} &= \left( \partial \sum \theta_{\mathbf{v}, \mathbf{S}'_i} \right) |_{gv} \\ &= \left( \sum_{S'_i} \sum_{g' \in S'_i} \theta_{\mathbf{v}, \mathbf{S}'_i/g'} + \theta_{\mathbf{g}'\mathbf{v}, \mathbf{S}'_i/g'} \right) |_{gv} \\ &= 0 \end{aligned}$$

Thus if  $g \in \cup S'_i$ , Then:

$$\theta_{\mathbf{g}\mathbf{v}, \mathbf{S}'_i/g} \in \partial\phi_v|_{gv}$$

So for  $\theta_{\mathbf{g}\mathbf{v}, \mathbf{S}'_i/g} = 0$ , it must appear at least twice in the sum, yet the left terms in the sum cannot contain it (they differ by the root vertex), and if there is a right term  $\theta_{\mathbf{g}\mathbf{v}, \mathbf{S}'_j/g} = \theta_{\mathbf{g}\mathbf{v}, \mathbf{S}'_i/g}$ , then it implies that  $S_j = S_i$ . Which is a contradiction, therefore:  $g \notin \cup S'_i$  and  $gv \notin \phi_v$ .

$$\begin{aligned} \max \left\{ L_g(u) : u \in \partial\tilde{\xi} \right\} &\leq \max \left\{ L_g(u) : u \in \partial\tilde{z} \bigcup_{v \in \partial\tilde{z}} \phi_v / \bigcup_i v_i \right\} \\ &\leq \max \left\{ L_g(u) : u \in \partial\tilde{z} \right\} + 1 - 1 \end{aligned}$$

□

## 7.1 The Sweep-rule Phase In The Dual Code

**Claim 7.10.** *Let  $z$  be an assignment. Then:*

1. For any generator  $g \in S$ , and potential wall  $L_g$  it holds that:

$$\max_{v' \in \partial^- z} L_g(v') \geq \max_{v' \in \partial^+ \phi(z)} -L_g(v')$$

2. The following equality holds:

$$\max_{v' \in \partial^- z} L_{d+1}(v') = \left( \max_{v' \in \partial^+ \phi(z)} -L_{d+1}(v') \right) + d' - 1$$

*Proof.* For the first part, let  $u$  be a local maximum of  $-L_g$  in  $\partial^+ \phi(z)$ . Let  $v$  be a vertex and let  $S' \subset S$  be a subset of generators, of size  $d' - 1$ , such that  $\theta_{\mathbf{v}, S'}$  is an unsatisfied check, induced by  $\phi(z)$ , containing  $u$ . Let's split into cases, depending on whether  $g \in S'$ .

1. Assume that  $g \notin S'$ ; thus,  $L_g(v) = L_g(u)$ . Since  $\phi$ -transpose sends checks to checks, we have that the check  $\partial^- \theta_{\mathbf{v}-1, S/S'} = \phi(\partial^+ \theta_{\mathbf{v}, S'})$  is not satisfied, and therefore any vertex  $w \in \theta_{\mathbf{v}-1, S/S'}$  also belongs to  $\partial^-(z)$ . Combining that  $g \notin S'$  and therefore  $g \in S/S'$ , we get that  $gv^{-1} \in \partial^-(z)$ . In particular:

$$\max_{v' \in \partial^- z} L_g(v') \geq L_g(gv^{-1}) = 1 + L_g(v^{-1}) = 1 - L_g(u)$$

2. Assume that  $g \in S'$ . Then  $u \neq gv$  (otherwise  $-L_g(u) < -L_g(v)$ ), and again  $L_g(u) = L_g(v)$ . By repeating the argument above, we get that  $v^{-1} \in \partial^- z$ , and therefore:

$$\max_{v' \in \partial^- z} L_g(v') \geq L_g(v^{-1}) = -L_g(u)$$

So in overall we get that:

$$\max_{v' \in \partial^- z} L_g(v') \geq \max_{v' \in \partial^+ \phi(z)} -L_g(v')$$

For the second part, let  $u$  be a maximum of  $-L_{d+1}$  in  $\partial^+ \phi(z)$ . Let  $v$  be a vertex and let  $S' \subset S$  be a subset of generators, of size  $d' - 1$ , such that  $\theta_{\mathbf{v}, S'}$  is an unsatisfied check, induced by  $\phi(z)$ , containing  $u$ . Clearly, it must holds that:

$$u = \left( \prod_{g \in S'} g \right) v$$

Now  $\theta_{\mathbf{v}-1, S/S'}$  is an unsatisfied check in  $\partial^- z$ , and  $v^{-1}$  is a maximum of  $L_{d+1}$  in  $\partial^- z$ . To see this, assume through contradiction that the maximum of  $L_{d+1}$  in  $\partial^+ z$  is different from  $v^{-1}$  and denote it by  $v'$ . Then there is an unsatisfied check containing  $v'$  where  $v'$  is its root. By moving again to the transposed image by  $\phi$ , we find an unsatisfied check induced by  $\phi(z)$  which is rooted in  $v'$ , and the extremum vertex on it has a higher  $-L_{d+1}$  than  $u$ .

Therefore we get the strict equality:

$$\begin{aligned} \max_{v' \in \partial^- z} L_{d+1}(v') &= L_{d+1}(v^{-1}) = -L_{d+1}(v) = -(L_{d+1}(u) - (d' - 1)) \\ &= \left( \max_{v' \in \partial^+ \phi(z)} -L_{d+1}(v') \right) + d' - 1 \end{aligned}$$

□

**Corollary 7.11.** *Application of the Sweep rule in the dual code changes the extremum values of  $\{L_g\}_{g \in S}$  and  $L_{d+1}$  exactly as it changes them in the original code. Namely, the extremum values of  $\{L_g\}_{g \in S}$  don't increase, and the maximum value of  $L_{d+1}$  decreases by one.*

## 7.2 The bottom line

**Claim 7.12.** *The bottom line. [COMMENT] Complete it.*

## 8 Toric Encoded Circuits and Toom's Contours

**Definition 8.1** (Toric Encoded Circuit). *Let  $C$  be a quantum circuit. We say that  $C$  is a Toric encoded circuit if the following holds:*

1. *Any layer of the circuit consists of classical and quantum registers, such that there is a Toric code  $\mathcal{C}$  such that the quantum registers are encoded by the nice encoding of  $\mathcal{C}$ . At time  $t = 0$ , the quantum registers are initialized to be either  $|\bar{0}\rangle$ , encoded  $|\mathbf{H}\rangle$ , encoded  $|\mathbf{S}\rangle$ , or encoded  $|\mathbf{T}\rangle$ . The classical registers are initialized to be zeros.*
2. *The layers of  $C$  on the quantum registers at even times are sweep-cycles, and the layers at odd times are realizations of either logical Paulis,  $\mathbf{CX}$ , or measurements in the computational and parity bases. On the classical registers, including the measured register, we allow any two-bit gates.*

**Definition 8.2** (Base graph  $G_o$ ). *Let  $C$  be a Toric encoded circuit at depth  $d$ . Denote its quantum registers by  $\{R_i^j\}$ , where the subscript and the superscript identify the register number and the time, respectively. For example,  $R_0^0$  is the first register at time zero. Notice that measurements take quantum registers into classical, Thus any quantum register has a maximal depth, which we denote by  $d_i$ . Let's denote by  $\{\mathcal{G}_i\}$  the Toric complexes that induce the codes. We define the base graph of  $C$ , denoted by  $G_o = (V_o, E_o)$ , as follows:*

1. *The vertices  $V_o$  are tuples, where the first coordinates correspond to a vertex in the disjoint union over the vertices in  $\{\mathcal{G}_i\}$ , and the second coordinate is associated with a time. Namely:*

$$V_o := \bigcup_i (V(\mathcal{G}_i) \times [d_i])$$

2. *The edges  $E_o$  are derived from the original edges in  $\mathcal{G}_1, \dots, \mathcal{G}_k$ , with the addition that any two vertices in preceding times  $t$  and  $t + 1$  that support qubits (faces) such that  $C$  acts non-trivially on those qubits at time  $t$  are also connected by an edge. Namely:*

$$E_o := \left\{ \{(v, t), (u, t')\} : \begin{array}{l} \text{if} \\ \text{either there exists } i \text{ such } \{v, u\} \in \mathcal{G}_i \text{ and } t' = t + 1 \\ \text{or there exists } u_i = (g_i, l_i) \in C \text{ such } v, u \in l_{i,2} \text{ and } t = l_{i,1}, t' = l_{i,1} + 1 \end{array} \right\}$$

*[COMMENT] Here we should add that a vertex  $v$  belongs to location  $l$  if there is a qubit  $f$  that  $v$  belongs to its associated face.*

**Definition 8.3** (Tooms Contour Graph of  $C(\mathcal{E})$ ). *For a quantum circuit  $C$  and set of faults  $\mathcal{E}$ , let us denote the base graph of  $C[\mathcal{E}]$  by  $G_o$ . For each time  $t$ , denote the deviation induced by  $\mathcal{E}$  at time  $t$  by  $\mathcal{D}_t$ . We define the Tooms contour graph  $\mathcal{H} = (V_{\mathcal{H}}, E_{\mathcal{H}})$  as follows:*

1. *The vertices  $V_{\mathcal{H}}$  are the boundary of  $\mathcal{D}$ . Namely:*

$$V_{\mathcal{H}} := \{v_t : v_t = (v, t) \in V_o \text{ and there exists a face } f \in \partial\mathcal{D}_t \text{ such } v \in f\}$$

*We extend the action of potential walls to act on the vertices of  $V_{\mathcal{H}}$  by acting on the associated points in  $\mathbb{R}^d$ . More concretely, for a vertex  $v \in V_{\mathcal{H}}$ , whose corresponding vertex on the infinite  $\mathbb{R}^d$  Toric is  $\tilde{v} \in \mathcal{G}$ , and a potential wall  $L_i$ , the value of  $L_i$  at  $v$  is:*

$$L_i(v) := L_i(\tilde{v})$$

2. *The edges  $E_{\mathcal{H}}$  is partitioned into two types  $A_{\mathcal{H}}$  and  $F_{\mathcal{H}}$ , where for any logical gate  $g$  which applied in time  $t$  in  $C[\mathcal{E}]$  we add edge to  $A_{\mathcal{H}}$  as follow:*

- (a) *If  $g$  is either a logical Pauli, a measurement (both in the computational and phase basis), or an identity, then for any face  $f$  in the register on which  $g$  acts, we add:*

$$\{\{(u, t), (v, t+1)\} : u, v \in f \text{ and } v, u \in V_{\mathcal{H}}\}$$

- (b) *If  $g$  is a logical **CX** then for any physical **CX** in its realization, between faces  $f_1$  into  $f_2$  at time  $t$  we add:*

$$\{\{(u, t), (v, t+1)\} : u \in f_1 \cup f_2, v \in f_1 \cup f_2 \text{ and } v, u \in V_{\mathcal{H}}\}$$

*In addition for any fault  $g$  of  $\mathcal{E}$ , that is applied at time  $t$ , and any face  $f \in \text{Locc}(g)$ , we add the edges:*

$$\{\{(u, t), (v, t+1)\} : u, v \in f \text{ and } u, v \in V_{\mathcal{H}, X}\}$$

*To construct  $F_{\mathcal{H}}$ , we connect any pair of vertices  $(v, t)$ ,  $(u, t)$  if there exists a vertex  $(w, t+1)$  such both of them are connected to it through  $A_{\mathcal{H}}$ . Namely:*

$$F_{\mathcal{H}} = \{e = \{u, v\} \in E_o : \text{exists } w \in V_{\mathcal{H}} \text{ such } \{v, w\}, \{u, w\} \in A_{\mathcal{H}}\}$$

*We call  $A_{\mathcal{H}}$  and  $F_{\mathcal{H}}$  the arrows and forks edges respectively.*

For the analyses we would like to have the following definition:

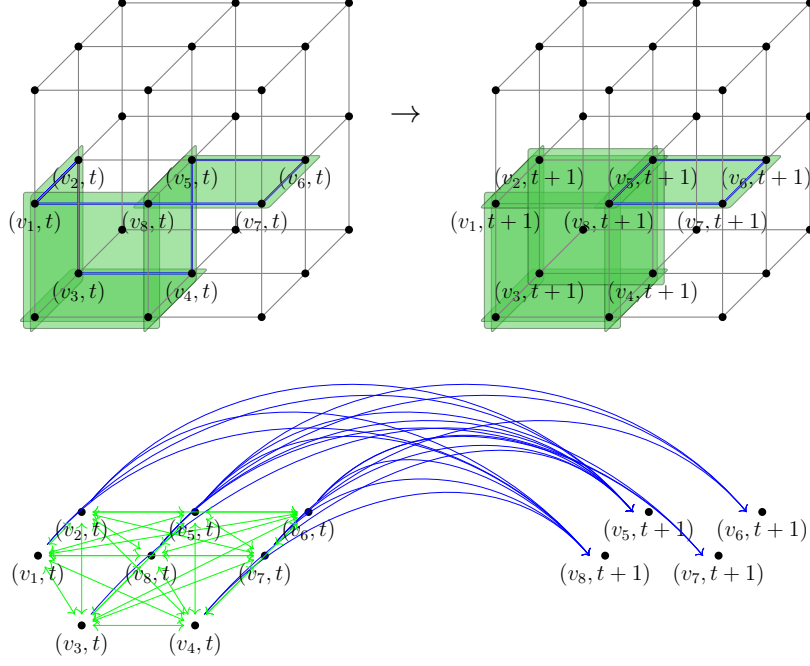


Figure 8: Above: The application of a sweep-cycle, where the green faces represent the bits assignment  $z$ , and the blue edges correspond to unsatisfied checks  $\partial z$ . The vertices in  $\partial z$  are labeled as  $v_1, v_2, \dots, v_8$ . Below: The Toom's contour derived from the single computation layer that matches the cycle. Arrows are colored in blue, while forks are colored in green. Note that  $(v_1, t+1)$  doesn't belong to the Toom's contour (since  $v_1$  doesn't belong to the syndrome at time  $t+1$ ).

**Definition 8.4.** For a Toric encoded quantum circuit  $C$ , a set of faults  $\mathcal{E}$ , and a step  $\tau$ , according to the standard order, let  $C[\mathcal{E}]_\tau$  be the partial computation circuit of  $C[\mathcal{E}]$  up to step  $\tau$ . We define the analysis Toom's contour at step  $\tau$   $\mathcal{H}_\tau = (V_\mathcal{H}, E_\mathcal{H})$  to be the graph obtained by taking the Toom's contour of  $C[\mathcal{E}]_\tau$  and adding vertices and edges as follows:

1. For vertices, we define  $t^*$  as the maximum time of vertices up to step  $\tau$  plus one, and then add the subset:

$$\left\{ v_{t^*} : v_{t^*} = (v, t^*) \text{ and there exists a } d' \pm 1 \text{ dimensional face } f \in \partial D_{t^*-1} \text{ and a vertex } u_{t^*-1} \text{ such } v_{t^*}, u_{t^*-1} \in f \right\}$$

2. For the edges, we add the following arrows:

$$\left\{ \{(u, t^*-1), (v, t^*)\} \text{ if there exists a } d' \pm 1 \text{ dimensional face } f \in \partial D_{t^*-1} \text{ and a vertex such } v_{t^*}, u_{t^*-1} \in f \right\}$$

3. Finally, we add forks for vertices at time  $t^*$  to preserve the property that any two vertices with the same time coordinate, which are connected to a third via arrows, are also connected by a fork.

## 8.1 Space-Time Graph

**Definition 8.5.** Consider a graph  $G = (V, A, F)$ , where  $V$  is a set of vertices, and  $A$  and  $F$  are sets of undirected edges. For  $v \in V$ , denote by  $\text{pre}(v) = \{u \in V : \{u, v\} \in A\}$ , we extend the notion for subsets of vertices  $X \subset V$  by  $\text{pre}(X) = \bigcup_{v \in X} \text{pre}(v)$ . Let  $T: V \rightarrow \mathbb{N}$ , We say that  $(G, T)$  is a time graph if and only if:

1.  $\{x, y\} \in A \Rightarrow T(y) = T(x) + 1$
2. For  $x, y \in V$   $\{x, y\} \in F$  if and only if there exists  $z \in V$  such both  $\{x, z\}, \{y, z\} \in A$ .

We will call to  $T$  time-function, to  $A$  arrows, and to  $F$  forks. Observe that from the second requirement it follows that forks can connect only vertices that have the same time value (set by  $T$ ).

**Remark 8.6.** The Toom's contour graph defined in Definition 8.3 is, by definition of its construction, a time-graph.

**Definition 8.7** (History, slice.). For a time graph  $(G, T)$  and a vertex  $u \in V$ , let  $G_u$  be the subgraph of  $(V, A)$  induced by  $\{v \in V : T(v) \leq T(u)\}$ . We will denote by  $H_u$  the 'History of  $u$ ', which is the set of vertices that are connected to  $u$  in  $G_u$ . A slice is an equivalence class of the relation  $u \equiv v$  if and only if  $H_u = H_v$ . Notice that the time function has to be constant on a slice, to see this consider vertices  $x, y$  with  $T(x) > T(y)$ , thus  $x \notin G_y$  and therefore  $x \in H_x/H_y$ . So they belong to different classes. Thus, we can extend the time function and the history to slices and write for a slice  $K$ ,  $T(K)$  and  $H_K$ .

**Claim 8.8.** Consider slices  $K_1, K_2$  such that  $T(K_1) = T(K_2)$ , then either  $K_1 = K_2$  or  $H_{K_1}, H_{K_2}$  are disjoint.

*Proof.* Assume a non-empty intersection, so there exists  $z \in H_{K_1} \cap H_{K_2}$  such that for any  $x \in K_1$  and  $y \in K_2$ , there exist arrow-paths  $z \rightarrow x$  and  $z \rightarrow y$ . Thus, for any  $w \in H_{K_1}$ , one can concatenate a path  $w \rightarrow x \rightarrow z \rightarrow y$  and conclude that  $y \in H_{K_2}$ .  $\square$

**Definition 8.9** (The graph of slice). Let  $K$  be a slice. The graph of  $K$ , denoted by  $G_K = (V_K, E_K)$ , is the graph whose vertices are slices  $R \subset H_K$  with  $T(R) = T(K) - 1$ . Two vertices are connected by an edge if and only if there is a fork whose ends belong to the slices associated with them. Namely,  $S, R \in V_K$  are connected in  $G_K$  if and only if there is  $\{s, r\} = f \in F$  such that  $s \in S$  and  $r \in R$ .

**Claim 8.10.**  $G_K$  is connected.

*Proof.* Let  $R, S \in V_K$  and consider  $r, s \in V$  such that  $r \in R, s \in S$ . Recall that  $R, S \subset H_K$  and therefore  $r, s \in H_K$ . Thus, by definition of the 'History' there exists a path, passing through arrows only, from  $r$  to  $s$  in  $H_K$ . Consider such a path that is minimal in the number of points  $x$  belong to it, with  $T(x) = T(K)$ . By induction on the number  $k$  of such points we prove that  $R$  and  $S$  are connected in  $G_K$ .



1. Base.  $k = 0$ , In this case, the path from  $r$  to  $s$  lies within  $G_r (= G_s)$ . Hence  $H_r = H_s$ , So  $R = S$ .
2. Induction step. There exists  $y$  on the path from  $r$  to  $s$  such that  $T(y) = T(K)$ . Let  $x$  be the point which precedes  $y$  on the path, and  $z$  the point that follows  $y$ . Since the values of  $T$  at the two ends of an arrow differ by 1, and since  $y$  gets the maximal  $T$  value in  $H_K$  it follows that:

- (a)  $\{x, z\} \subset \text{pre}(y) \Rightarrow \{x, z\} \in F$ .
- (b) The slices of  $x$  and  $z$ , say  $K_x$  and  $K_z$  has time value  $T(K_x) = T(K_z) = T(K) - 1$ , Namely they are both members of  $V_K$ .

Since the path connecting  $r, x$  in  $H_K$  has  $k - 1$  vertices with  $T(\cdot) = T(K)$ , then by the induction hypothesis,  $R$  and  $K_x$  are connected in  $G_K$ , and by similar argument so are  $K_z$  and  $S$ . On the other hand,  $\{x, z\} \Rightarrow \{K_x, K_z\} \in E_K$ . Thus,  $R$  and  $S$  are connected in  $G_K$ .

□

**Definition 8.11** (Spanned Set). Consider a subset  $A \subset \mathbb{R}^d$ , and  $d + 1$  points  $x_1, \dots, x_{d+1}$ . We say that  $\langle A, x_1, \dots, x_{d+1} \rangle$  is a spanned set of  $A$  if for any  $i \in [d + 1]$  and  $s \in A$ , it holds that  $L(s) \leq L_i(x_i)$  and in addition there are  $v_1, \dots, v_{d+1} \in V$ , not necessary different, that achieve the equalities  $L_i(x_i) = L_i(v_i)$ . We name  $x_1, \dots, x_{d+1}$  the poles of  $A$ . Furthermore, we extend the notation to a spanned slice when  $A$  is a slice of some time-graph. Notice that saying  $\langle A, x_1, \dots, x_{d+1} \rangle$  is a spanned set means that  $\mathbf{Size}(A) = \mathbf{Size}(\{x_1, \dots, x_{d+1}\})$ .

Observe that in the case where the subset  $A$  is a slice. Each of these poles can be associated with a vertex of  $G$  that gives the equality. If there are multiple vertices whose give equality, associate the point with one of them arbitrarily. We will use the notion of applying functions originally defined over vertices to the poles, referring to the application over the vertices associated with them. For example  $\text{pre}(x_i) = \text{pre}(v)$  for the vertex  $v \in A$  which satisfies  $L_i(v) = L_i(x_i)$  and therefore is associated with the pole  $x_i$ . Another example is referring to  $x_i$  as a vertex, so when saying 'For  $x_i \in V_k$ ' or 'For  $\{x_i, u\} \in F$ ', we refer to the associated vertex or the edge connecting it to  $u$ .

**Claim 8.12.** Consider a time graph  $(G, T)$ , Let  $K$  be a slice in  $G$ , and let  $\hat{K} = \langle K, x_1, \dots, x_{d+1} \rangle$  be a spanned slice of  $K$  such that  $K \neq H_K$ . Then for some integer  $k$  there exist spanned slices  $\hat{K}_0 = \langle K_0, \cdot \rangle, \dots, \hat{K}_k = \langle K_k, \cdot \rangle$  and Forks  $F_1, \dots, F_k$  such that:

1. For  $i \in [d + 1]$   $\text{pre}_i(x_i)$  belongs to the poles  $\hat{K}_0, \dots, \hat{K}_k$ .
2. Introduce an edge between  $\hat{K}_i$  and  $\hat{K}_j$  if and only if one of the Forks  $F_1, \dots, F_k$  consists of a pole of  $\hat{K}_i$  and a pole of  $\hat{K}_j$ . Then the graph formed from  $\hat{K}_0, \dots, \hat{K}_k$  is connected.
3.  $\sum_{i=0}^k \mathbf{Size}(\hat{K}_i) + \sum_{i=1}^k \mathbf{Size}(F_i) \geq \sum_{i=1}^{d+1} L_i(\text{pre}_i(v_i))$

*Proof.* First Notice that  $K$  doesn't contain leaves in  $(V, A)$ , since a leaf is connected only to itself via arrows, and therefore its 'slice' equals to its 'History'. Thus  $\text{pre}_i(x_i)$  is not empty for  $i = 1, \dots, d+1$ . Next consider the graph  $G_K = (V_K, E_K)$  from definition 8.9. Since  $\{x_i, \text{pre}_i(x_i)\}$  is an arrow  $\text{pre}_i(x_i)$  belongs to a slice in  $V_K$ . for  $i = 1, \dots, d+1$  denote by  $R_i$  the slice in  $V_K$  that contains  $\text{pre}_i(x_i)$ .

By claim 8.10  $G_K$  is connected and therefore there exist a minimal collection  $\{K_0, \dots, K_k\}$  of slices form  $V_K$  which contains  $R_1, R_2, \dots, R_{d+1}$ , and which is connected in  $G_K$ . We pick a set of forks  $\mathbf{F} = \{F_1, \dots, F_k\}$  which realizes a spanning tree for this collection of slices. Later we will identify edges from this spanning tree with the forks from  $\mathbf{F}$ .

For  $i = 1, \dots, d+1$  we set  $\text{pre}_i(v_i)$  to be the  $i$ th pole of  $R_i$ , This assures (1). The set of remaining poles for  $\hat{K}_0, \dots, \hat{K}_k$  will be equal to  $\cup_{i=k}^k F_i$ . This will assure (ii), We will also select poles for  $F_1, \dots, F_k$  to form 'spanned forks'  $\hat{F}_1, \dots, \hat{F}_k$  in such way that:

$$\sum_{i=0}^k \text{Size}(\hat{K}_i) + \sum_{i=1}^k \text{Size}(\hat{F}_i) \geq \sum_{i=1}^{d+1} L_i(\text{pre}_i(v_i))$$

This will assure (3).

Let us denote by  $J_0, \dots, J_{2k}$  the enumerated union  $K_0, \dots, K_k, F_1, \dots, F_k$ . Observes that for any choice of  $(d+1)(2k+1)$  elements  $z_0^1, z_0^2, z_0^3, \dots, z_{2k}^{d+1}, \dots, z_{2k}^{d+1}$  in  $\mathbb{R}^d$ , such that  $z_j^i \in J_j$  it holds that:

$$\sum_{i=0}^k \text{Size}(\hat{K}_i) + \sum_{i=1}^k \text{Size}(\hat{F}_i) \geq \sum_{j,i} L_i(z_j^i) \quad (1)$$

Later, we are going to take the points  $\{z_j^i\}$  from the intersection of  $J_j$ 's. For convenience, let us assume that for the index subset  $X \subset [2k] \cup \{0\}$ , the intersection  $\bigcap_{j \in X} J_j$  returns a single point. If there is more than one, then decide on the point in a way that all the chosen points simultaneously satisfy that for any index subsets  $Y, X$ , such that  $X \cap Y$  and they both introduce a non-trivial intersection  $\bigcap_{j \in Z} J_j : Z \in \{X, Y\}$ , then:

$$\bigcap_{j \in X} J_j = \bigcap_{j \in Y} J_j$$

Now consider a non-trivial maximal intersection  $\bigcap_{j \in X} J_j$ , the intersection is maximal in the sense that for any  $j' \notin X$  it holds that  $\bigcap_{j \in X \cup \{j'\}} J_j = \emptyset$ . We claim that for any  $i$  and for any such  $X$ , there is  $t \in X$  such that  $J_t$  is the successor of  $J_j$  on the path to  $R_i$  for any  $j \in X/\{t\}$ . Assume not. Let  $x, y \in X$ , and denote the paths from  $J_x, J_y$  to the  $i$ th pole by  $\langle J_x, J_{x_2}, \dots, R_i \rangle$ ,  $\langle J_y, J_{y_2}, \dots, R_i \rangle$ , such that  $J_y \neq J_{x_2}$ . If  $y = x_2$ ,  $y_2 = x$ , or  $x_2 = y_2 \in X$ , then pick other  $x, y$  (if there is no such, we get an immediate contradiction). In that case,  $\langle J_x, J_y, J_{y_2}, \dots, R_i \rangle$  is a path from  $J_x$  to  $R_i$  which is different from  $\langle J_x, J_{x_2}, \dots, R_i \rangle$ . Therefore, there are at least two paths from  $J_x$  to the  $i$ th pole, namely, there is a cycle in contradiction to the minimality of  $K_0, \dots, K_k$ .

We will choose the  $z_j^i$  by the following process. Pick a  $z_j^i$  that has not been set yet. If  $J_j = R_i$ , then set  $z_j^i \leftarrow \text{pre}_i(x_i)$  - we call this a type-1 assignment. Otherwise, consider the path from  $J_j$  to  $R_i$  (by connectivity, it has to be such a one, and by minimality, there is exactly one). Let  $J_t$  be the successor on the path, then pick  $z_j^i \in J_j \cap J_t$  - similarly, we call this assignment a type-2 assignment. Since any type-2 assignment is associated with a non-trivial intersection, and any non-trivial intersection induces a type-2 assignment for all  $i$ 's (since for all  $i$ 's, one of the  $J_j$  on its support is a successor of the rest on their path to the  $i$ th pole), we have that:

$$\begin{aligned} \sum_{j,i} L_i(z_j^i) &= \sum_{j,i,z_j^i \in \text{type-1}} L_i(z_j^i) + \sum_{j,i,z_j^i \in \text{type-2}} L_i(z_j^i) \\ &= \sum_i^{d+1} L_i(\text{pre}_i(x_i)) + \sum_{X: \bigcap_{j \in X} J_j \neq \emptyset} (|X| - 1) \sum_i^{d+1} L_i \left( \bigcap_{j \in X} J_j \right) \\ &= \sum_i^{d+1} L_i(\text{pre}_i(x_i)) \end{aligned}$$

Plugging it into eq. (1) gives the desired.  $\square$

**Claim 8.13.** *The maximal size of a fork is  $2d' = d$ .*

*Proof.* Consider the rules of forks connecting in Definition 8.3. For forks obtained by rules (a), (b), or as a result of a fault, it's clear that their vertices at their ends are on intersecting faces (when projecting the vertices on  $\mathcal{G}$ ). The maximal fork, in those cases, has the form of:

$$F = \{v, (\prod_{g \in S'_1} g) (\prod_{g \in S'_2} g) v\}$$

Where  $S'_1$  and  $S'_2$  are subsets of  $S$  of size  $d'$ , and therefore the size of such forks is  $\text{Size}(F) = 2d'$ .  $\square$

**Definition 8.14.** *Let  $\hat{K}$  be a spanned slice, and let  $\hat{K}_0, \dots, \hat{K}_k$  be spanned slices in  $H_K$ , and let  $F_1, \dots, F_k$  be spanned forks, such that  $\hat{K}_0, \dots, \hat{K}_k, F_1, \dots, F_k$  satisfy the conditions in Claim 8.12. We call  $\hat{K}_0, \dots, \hat{K}_k, F_1, \dots, F_k$  the predecessor decomposition of  $\hat{K}$ .*

*Furthermore, we say that  $\hat{K}$  is a result of a sweep-cycle, faults, or a logical operation if the layer at time  $T(\hat{K}) - 1$  consists of sweep-cycle gates, fault gates (whose source is  $\mathcal{E}$ ), or either measurement or logical Pauli. The order of the slice is its time modulo 4, namely  $\text{order}(\hat{K}) = T(\hat{K}) \bmod 4$ . Observe that slices that are results of faults have an order that is either 0 or 2, whereas slices that are results of a sweep-cycle or logical operation are of orders 1 and 3, respectively.*

**Corollary 8.15.** *Consider a spanned slice  $\hat{K}$ , at finite size, such that  $K \neq H_K$ . Since  $K \neq H_K$ , it follows that  $\hat{K}$  has a predecessor decomposition, denoted by  $\hat{K}_0, \dots, \hat{K}_k, F_1, \dots, F_k$ . The inequality in Claim 8.12 becomes:*

1. If  $\hat{K}$  is a result of  $\xi$ -sweep-cycle, then:

$$\sum_{i=0}^k \mathbf{Size}(\hat{K}_i) + \sum_{i=1}^k \mathbf{Size}(F_i) \geq \mathbf{Size}(\hat{K}) + \xi$$

2. If  $\hat{K}$  is a result of either faults or a logical operation, then:

$$\sum_{i=0}^k \mathbf{Size}(\hat{K}_i) + \sum_{i=1}^k \mathbf{Size}(F_i) \geq \mathbf{Size}(\hat{K})$$

*Proof.* For the sweep-cycle part, we use Claim 7.12, which states that after each application of the sweep-cycle over a finite size assignment, the maximal  $L_{d+1}$  value of the resulting boundary decreases by 1, while the values of each  $L_g$  do not increase.

When  $\hat{K}$  is a result of either faults<sup>2</sup> or a logical operator, we use the fact that since the operators are transversal, we have that the support of  $\hat{K}$  is contained in the support of  $\cup_0^k \hat{K}_i$ , and therefore for any  $i \in [d+1]$ :

$$\max\{L_i(v) : v \in \hat{K}\} \leq \max\{L_i(v) : v \in \bigcup_{i=0}^k \hat{K}_i\}$$

□

**Claim 8.16.** For a step  $\tau$ , let  $\mathcal{H}_\tau$  be analysis Toom's contour at step  $\tau$ , and let  $t^*$  be the maximal time at that contour. For a spanned slice  $\hat{K}$ , at time  $T(K) = t^*$ , where  $K \neq H_K$ , the inequality in Claim 8.12 becomes:

$$\sum_{i=0}^k \mathbf{Size}(\hat{K}_i) + \sum_{i=1}^k \mathbf{Size}(F_i) \geq \mathbf{Size}(K) - d - d' - 1$$

*Proof.* We allow vertices at the final time layer to be connected by an arrow if they are at a distance of  $d' + 1$  from each other. Therefore, for any  $i \in [d]$ , the value of  $L_i$  for  $v_i$  might be greater by 1 than the value of  $\text{pre}_i(v_i)$ , and the  $L_{d+1}$  for  $v_{d+1}$  might be greater by  $d' + 1$  than the value of the  $d + 1$  pole of  $\hat{K}$ . Hence, overall, we get that:

$$\begin{aligned} \sum_{i=1}^{d+1} L_i(\text{pre}_i(v_i)) &\geq \sum_{i=1}^d (L_i(v_i) - 1) + L_{d+1}(v_{d+1}) - \max d' - 1 \\ &= \mathbf{Size}(K) - d - d' - 1 \end{aligned}$$

□

---

<sup>2</sup>Notice that  $\hat{K}$  does not consist of faults since otherwise  $K = H_K$ , so the meaning here is that  $\hat{K}$  contains vertices which weren't flipped in the fault layer.

## 9 Explantation of a Spanned Slice

**Definition 9.1.** Consider a Tooms contour graph induced by Toric encoded circuit, with sweep-cycle parameter  $\xi = 1$ , and let  $\alpha, \beta$  be constants and  $\mathcal{X}_0, \mathcal{X}_1, \mathcal{X}_2, \mathcal{X}_3 \in \mathbb{A}$  be quadruple, defining such:

$$\alpha := 40(d+1)^2, \quad \beta := 5(d+1)$$

$$\mathcal{X}_r := 1 - r \frac{d+1}{\alpha} = 1 - \frac{r}{40(d+1)}$$

Given sets  $W$  of points,  $A$  of arrows and  $F$  of forks, we define  $U$  as the set of vertices of the graph induced by the edges of  $A \cup F$ . The sets  $W, A$  and  $F$  form an explanation of a spanned slice  $\hat{K} = \langle K, v_1, \dots, v_{d+1} \rangle$  of order  $\text{order}(\hat{K}) = r$ , if and only if:

1.  $W \cup \{v_1, \dots, v_{d+1}\} \subset U \subset H_K$  and the graph  $(U, A \cup F)$  is connected.
2. All elements of  $W$  are leaves.
3. For  $m = |W|$  and  $s = \mathbf{Size}(K)$  we have  $|A| \leq \alpha(m - \mathcal{X}_r) - \beta s$  and  $|F| < m - 1$ .

Furthermore, for a step  $\tau$  and a spanned slice  $\hat{K}$  in the analysis Toom's contour at step  $\tau$ , we extend the definition of explanation as above, but require the following weaker inequality instead: For  $m = |W|$  and  $s = \mathbf{Size}(K)$ , we have  $|A| \leq \alpha(m + 1) - \beta s$  and  $|F| < m - 1$ .

**Claim 9.2.** Every spanned slice  $K = \langle K, v_1, \dots, v_{d+1} \rangle$  has an explanation.

*Proof.* Let  $h = T(K) - \min_{u \in H_K} T(u)$ . For spans derived from the standard Toom's contours (namely not a analysis Toom's contours), we prove by induction on  $h$ .

1. Base:  $h = 0$ , meaning  $T$  is constant on  $H_K$ , so no arrows connect points of  $H_K$ . Thus,  $H_K$ , as well as  $\mathbf{K}$ , consists only of a single leaf, namely  $\hat{K}$  is a result of a fault, and  $r = \text{order}(\mathcal{X}_r) \in \{0, 2\}$ . In that case, there is a single vertex  $u \in V_H$  such that  $U = W = \{u\}$ , so  $m = 1$ ,  $s = 0$ , and  $|A|, |F| = 0$ . It is easy to check that those values satisfy the requirement.
2. Induction Step:  $h \neq 0$  implies  $K \neq H_K$ . Thus, by claim 8.12, we know that for some  $k$  there exist spanned slices  $\hat{K}_0, \dots, \hat{K}_k$  and forks  $F_1, \dots, F_k$  that satisfy claim 8.12. In particular, for  $r < 3$  it holds that:

$$\sum_{i=0}^k \mathbf{Size}(\hat{K}_i) + \sum_{i=1}^k \mathbf{Size}(F_i) \geq \mathbf{Size}(\hat{K})$$

Whereas, for  $r = 3$ :

$$\sum_{i=0}^k \mathbf{Size}(\hat{K}_i) + \sum_{i=1}^k \mathbf{Size}(F_i) \geq \mathbf{Size}(\hat{K}) + \xi = \mathbf{Size}(\hat{K}) + 1$$

Consider  $i \in \{0, \dots, k\}$ , and denote  $s_i = \mathbf{Size}(\hat{K}_i)$ . By the inductive hypothesis and since  $T(K_i) = T(K) - 1$ , we know that  $\hat{K}_i$  has an explanation formed by a set of leaves  $\mathbf{W}_i$ , a set of arrows  $\mathbf{A}_i$ , and a set of forks  $\mathbf{F}_i$ . Let  $m_i = |\mathbf{W}_i|$ . Thus, the sets  $\mathbf{A}_i$  and  $\mathbf{F}_i$  have at most  $\alpha(m_i - \mathcal{X}_{r-1}) - \beta s_i$  arrows and  $m_i - 1$  forks. We define:

- (a)  $\mathbf{W} = \cup_{i=0}^k \mathbf{W}_i$ , Notice that  $\mathbf{W}_i \subset K_i$  and that  $T(K_i) = T(K_j)$  for all  $i, j$ , thus by Claim 8.8  $\mathbf{W}$  is a union of disjoint set, Hence  $W$  contains  $m = \sum_{i=0}^k m_i$  leaves.
- (b)  $\mathbf{F} = \{F_1, \dots, F_k\} \cup_{i=0}^k \mathbf{F}_i$  with at most  $k + \sum_{i=0}^k m_i - 1 = m - 1$  elements.
- (c)  $\mathbf{A} = \{\{v_i, \text{pre}_i(v_i)\}\} \cup_{i=0}^k \mathbf{A}_i$ . For bounding the number of arrows in  $\mathbf{A}$  we condition upon whether  $r = 3$ , For convenient, let us denote by  $Y$  the indicator, which indicate if  $r = 3$ .

$$\begin{aligned}
& d + 1 + \sum_{i=0}^k \alpha(m_i - \mathcal{X}_{r-1}) - \beta s_i \\
& \leq d + 1 + \alpha m - \mathcal{X}_{r-1} \alpha(k + 1) - \beta(s + Y\xi - k \cdot \mathbf{Size}(\text{fork})) \\
& = \alpha(m - \mathcal{X}_r) - \beta s + (\alpha(\mathcal{X}_r - \mathcal{X}_{r-1}) + d + 1 - \mathcal{X}_{r-1} k \alpha - \beta Y\xi + \beta k \cdot \mathbf{Size}(\text{fork}))
\end{aligned}$$

So it's left to show that the term in the closure is negative for all integers  $k$ :

$$\alpha(\mathcal{X}_r - \mathcal{X}_{r-1}) + d + 1 - \mathcal{X}_{r-1} k \alpha - \beta Y\xi + \beta k \cdot \mathbf{Size}(\text{fork})$$

We do that by showing that for the choice of the parameter values,  $\alpha, \beta, \mathcal{X}_0, \dots, \mathcal{X}_3$ , the slope is negative, and then the value of the term at  $k$  equals zero is negative. For the slope to be negative, we require:

$$-\alpha \mathcal{X}_{r-1} + \beta \mathbf{Size}(\text{fork}) \leq 0 \Rightarrow \mathbf{Size}(\text{fork}) \leq \frac{\alpha}{\beta} \mathcal{X}_{r-1}$$

For negativity at the origin,  $k = 0$ , we require for  $r < 3$ :

$$\begin{aligned}
& (\mathcal{X}_r - \mathcal{X}_{r-1})\alpha + d + 1 \leq 0 \\
& \Rightarrow \mathcal{X}_r \leq \mathcal{X}_{r-1} - \frac{d + 1}{\alpha}
\end{aligned}$$

And for  $r = 3$ :

$$\begin{aligned}
& (\mathcal{X}_3 - \mathcal{X}_2)\alpha + d + 1 - \beta\xi \leq 0 \\
& \Rightarrow \mathcal{X}_3 \leq \mathcal{X}_0 - 3\frac{d + 1}{\alpha} + \frac{\beta}{\alpha}\xi
\end{aligned}$$

So in total:

$$\begin{aligned}
\mathcal{X}_1 &\leq \mathcal{X}_0 - \frac{d+1}{\alpha} \\
\mathcal{X}_2 &\leq \mathcal{X}_0 - 2\frac{d+1}{\alpha} \\
\mathcal{X}_3 &\leq \mathcal{X}_0 - 3\frac{d+1}{\alpha} + \frac{\beta}{\alpha}\xi \\
\mathcal{X}_0 &\leq \mathcal{X}_0 - 4\frac{d+1}{\alpha} + \frac{\beta}{\alpha}\xi \\
\mathbf{Size}(\text{fork}) &\leq \frac{\alpha}{\beta}\mathcal{X}_r
\end{aligned}$$

The first three inequalities hold by the definitions of the  $\mathcal{X}_r$ , the fourth is satisfied since  $\frac{\beta}{\alpha}\xi = 4\frac{d+1}{\alpha}$ , the last is obtained due to Claim 8.13, that states that the maximal size of a fork equals  $4d$ , and that  $\frac{\alpha}{\beta}\mathcal{X}_r$  is greater than  $4d$ .

Finally, by Claim 8.12, the graphs induced by  $\mathbf{A}_i \cup \mathbf{F}_i$  are connected, thus the graph induced by  $\mathbf{A} \cup \mathbf{F}$  is also connected. Therefore,  $\mathbf{W}, \mathbf{A}, \mathbf{F}$  form an explanation of  $K$ .

It's left to prove for spanned slices in the analysis Toom's contours. Notice, that  $h$  has to be greater than zero, We prove the inequality by repeating on the induction bases, where all the spanned slices that are back in the history of  $K$  are spanned slices in the standard Toom's contour. So the only different is in the bounding of  $\mathbf{A}$ 's size. We use Claim 8.16 and get:

$$\begin{aligned}
|\mathbf{A}| &\leq \alpha(m+1) - \beta s \\
&\quad + (-\alpha(1 + \mathcal{X}_{r-1}) + d + 1 - \mathcal{X}_{r-1}k\alpha + d + d' + 1 + \beta k \cdot \mathbf{Size}(\text{fork})) \\
&\leq \alpha(m+1) - \beta s \\
&\quad + (-\alpha + d + 1 - \mathcal{X}_{r-1}k\alpha + d + d' + 1 + \beta k \cdot \mathbf{Size}(\text{fork}))
\end{aligned}$$

Where we used the fact that  $\mathcal{X}_{r-1} \in (0, 1)$  for  $r \in \{0, 1, 2, 3\}$ . Clearly, the bound is satisfied since  $\alpha \geq 2d + d' + 1$  and  $\mathcal{X}_{r-1}\alpha \geq \beta \cdot \mathbf{Size}(\text{fork})$ .  $\square$

**Corollary 9.3.** *Let  $\hat{K}$  be a spanned slice with size  $s$ , and explanation with  $|A|$  arrows, and  $|F|$  forks. Then it is induced by at least the following number of faults:*

$$\frac{1}{2^{d'}} \frac{1}{2} (|F| + 1 + \alpha^{-1}(|A| - 1) + \beta s)$$

Furthermore, the ratio of leaves to edges in an explanation is greater than  $\frac{1}{2\alpha} = \frac{1}{80(d+1)^2}$ .

*Proof.* We bound the Claim 9.2 by the number of leaves in the explanation, and use the fact that any  $d'$ -face has  $2^{d'}$  vertices, so each fault contributes at most  $2^{d'}$  leaves to the explanation.  $\square$

**[COMMENT]** Check what happened if we set  $\xi = \sqrt{d}, \beta = \sqrt{d}$  is that better?

## 10 Counting Subtrees.

**Claim 10.1.** *Let  $G = (V, E)$  be a  $\Delta + 1$ -regular graph, and let  $k$  be an integer less than  $|E|$ . Fix a vertex  $r \in V$ . The number of subgraphs rooted at  $r$  with less than  $k$  edges is at most  $\alpha^k$ .*

*Proof.* Denote by  $T_\Delta$  and  $T_2$  the infinity  $\Delta$  and binary tress. There is an injection between the subtrees of  $G$ , rooted at  $v$ , with at most  $k$  edges, to the subtrees of  $T_\Delta$  rooted at  $v$ , with at most  $k$  edges. Moreover, there is an injection from the subtrees of  $T_\Delta$  rooted at  $v$ , with at most  $k$  edges to the subtrees of  $T_2$ , rooted at  $v$ , with at most  $k \log \Delta$  edges.

[COMMENT] In the second map, we think on replacing each of the vertex with  $\Delta - 1$ -leaves binary tree, each leaf is associated with a outgoing edge. .

Thus, it's enough to bound the number of of subtrees in  $T_2$  rooted at  $v$ , with at most  $k \log \Delta$  edges, that number is less than the number of binary tress with  $k \log \Delta + 1$  leaves. For exact leaves number we get the  $k \log \Delta$  Catalan number, which its limit is:

$$\sim \frac{4^{k \log \Delta}}{(k \log \Delta)^{\frac{3}{2}} \sqrt{\pi}} \leq \frac{\Delta^{2k}}{(k \log \Delta)^{\frac{3}{2}} \sqrt{\pi}}$$

Therefore we can bound by:

$$\sum_{j=1}^k \frac{\Delta^{2j}}{(j \log \Delta)^{\frac{3}{2}} \sqrt{\pi}} \leq \frac{\Delta^{2k}}{\sqrt{\pi} \log^{\frac{3}{2}} \Delta} \sum_{j=1}^k \frac{1}{j^{\frac{3}{2}}} \leq \zeta\left(\frac{3}{2}\right) \cdot \frac{\Delta^{2k}}{\sqrt{\pi} \log^{\frac{3}{2}} \Delta}$$

□

## 11 Tree Separator Lemma

For a tree  $T = (V, E)$  and a vertex  $v \in V$ , we call the subtree obtained by taking the descendants of  $v$  the subtree rooted at  $v$ .

**Claim 11.1.** *Let  $T = (V, E)$  be a tree with  $m > 3$  leaves and  $\tau$  edges, then it has a subtree with  $m' \in (\frac{1}{3}m, \frac{2}{3}m)$  leaves and at most  $\frac{m'}{m}\tau$  edges.*

*Proof.* Order the vertices according to their heights. Denote by  $v \in V$  the lowest vertex for which the subtree rooted at  $v$  has at least  $\frac{1}{3}m$  leaves. Now, denote by  $T_1$  the subtree obtained through the following iterative process over  $v$ 's children:

1. Initialize  $T_1$  as the subtree rooted at  $v$ .
2. For a child  $u$  of  $v$ :
  - (a) Check if erasing from  $T_1$  the subtree rooted at  $u$  doesn't decrease the number of leaves below  $\frac{1}{3}m$ . If so, then we update  $T_1$  to be the result of the erasure.



Clearly, the algorithm is defined such that  $T_1$  has to have at least  $\frac{m}{3}$  leaves. Furthermore, since any child of  $v$  is a root of a subtree with fewer than  $\frac{m}{3}$  leaves (otherwise we get a contradiction to the minimality of  $v$ 's height), we have that if  $T_1$  would have more than  $\frac{2}{3}m$  leaves, then the subtraction of any of its children would yield a tree with at least  $\frac{2}{3}m - \frac{1}{3}m = \frac{1}{3}m$  leaves. Namely,  $v$  has in  $T_1$  a child  $u$  such that the subtraction of the subtree rooted at  $u$  from  $T_1$  results in a subtree with more than  $\frac{1}{3}m$  leaves. But if indeed there were such a child, then the algorithm would erase it, so there is not.

Now let  $T_2 = T/T_1 \cup v$ , namely the tree induced by the subtraction of  $T_1$ 's edges from  $T$ . Observe that since the summation of leaves in  $T_1$  and  $T_2$  is the leaves in  $T$ , and  $T_1$  has no more than  $\frac{2}{3}m$  leaves, and no less than  $\frac{1}{3}m$  leaves, it holds that the number of leaves in  $T_2$  is also in the range  $(\frac{1}{3}m, \frac{2}{3}m)$ . We claim that at least one of the subtrees has fewer than  $\frac{m'}{m}\tau$  edges.

To see this, denote by  $m_1, m_2$  and by  $\tau_1, \tau_2$  the leaves and the edges in  $T_1, T_2$  respectively. Now:

$$\frac{\tau}{m} = \frac{\tau_1 + \tau_2}{m_1 + m_2} = \frac{m_1}{m_1 + m_2} \frac{\tau_1}{m_1} + \frac{m_2}{m_1 + m_2} \frac{\tau_2}{m_2}$$

Namely,  $\frac{\tau}{m}$  is a weighted average of  $\frac{\tau_1}{m_1}$  and  $\frac{\tau_2}{m_2}$ , and therefore it is greater than their minimum. Peak the subtree with the minimal quotient.  $\square$

By repeating recursively on the above construction, we get the following corollary:

**Corollary 11.2.** *Let  $T = (V, E)$  be a tree with  $m$  leaves and  $\tau$  edges. Then, for any  $\alpha > 0$ , it has a subtree with  $m' \in (\frac{1}{3}\alpha m, \frac{2}{3}\alpha m)$  leaves and at most  $\frac{m'}{m}\tau$  edges.*

**Claim 11.3.** *Let  $\gamma, \beta \in \mathbb{R}_{>0}$  and  $n$  be a positive integer. For any tree  $T$  with  $\tau \geq \beta n$  edges and  $m$  leaves such that  $\tau \leq \gamma m$ , there is a subtree  $T'$  of  $T$  with a number of edges  $\tau'$  less than  $\frac{\beta}{2}n$  and a number of leaves greater than  $\frac{\beta}{4\gamma}n$ .*

*Proof.* Since the construction of claim 11.1 preserves the ratio of edges to leaves, we have that for a  $T'$  obtained using the construction, the number of edges satisfies  $\tau' \leq \gamma m'$ . So, it's enough to look for the maximal  $\alpha$  such that:

$$\gamma m' \leq \gamma \frac{2}{3}\alpha m \leq \frac{\beta}{2}n \Rightarrow \alpha = \frac{3\beta}{4\gamma} \frac{n}{m}$$

Which gives  $m' \geq \frac{1}{3}\alpha m = \frac{\beta}{4\gamma}n$ .  $\square$

## 12 Proof of The Theorem

**Definition 12.1** (Simulation and Logical Errors). *For a quantum code  $\mathcal{C}$  of length  $n$  and a decoder for  $\mathcal{C}$ , denoted by  $D$ , we say that a Pauli operator  $P \in \mathcal{P}^{\otimes n}$  is a logical error with respect to  $D$  if  $DP$  does not equal the logical identity.*

*For quantum circuits  $C$  and  $\tilde{C}$ , a noise channel  $\mathcal{E}$ , and  $p \in (0, 1)$ , we say that  $\tilde{C}$  simulates  $C$  with probability  $1 - p$  if*

1. If there is a mapping between the qubits of  $C$  and the registers of  $\tilde{C}$ , along with a decoding procedure such that, at the end of running  $\tilde{C}$ , decoding the registers results in the same quantum states as those produced by running  $C$ .
2. The probability induced by  $\mathcal{E}$  that the deviation on one of the registers has a logical error is less than  $p$ .

**Lemma 12.2.** *For any  $d, d'$ , and a constant  $p_0 \in (0, 1)$  that depends only on  $d$ . Consider a quantum circuit  $C$  with depth  $\mu$  and width  $w$ , and let  $\mathcal{N}_{\mathcal{E}}$  be a local stochastic noise channel with a noise rate  $p < p_0$ . There is a Toric encoded circuit  $\tilde{C}$  such that each of its quantum registers is encoded by an  $n$ -length,  $(d, d')$ -Toric code. It simulates  $C$  with probability:*

*Proof.* We construct  $\tilde{C}$  as follows: for each input wire of  $C$ , we initialize the logical zero  $|0\rangle$  of the  $(d, d')$ -Toric code. For each of the gates **H** and **S**, we initialize the encoded  $|\mathbf{H}\rangle$  and  $|\mathbf{S}\rangle$  states, and for each **T**, we initialize copies of both  $|\mathbf{T}\rangle$  and  $|\mathbf{S}\rangle$  states. The even layers of  $\tilde{C}$  are sweep cycles, while on the odd layers, we set the realization of the logical gates. For **CX**, we set the transversal realization, and for **H**, **S**, and **T**, we use gate teleportation. Thus the width of  $\tilde{C}$  expands to  $wn + 2\mu n$ . For gate teleportation, we use the decoder in ??, which runs at most at a depth of  $n$ . Thus, the depth of  $\tilde{C}$  expands to  $2(3\mu n)$ .

The decoder successfully decodes any error that does not contain a deviation cluster larger than  $\gamma n^{\frac{1}{d}}$ . Thus, it remains to prove that with probability  $1 - p$ , no deviation cluster exceeds that size. To prove this, we use Claim 3.15, which states that the probability of there being a time  $t$  with an error cluster larger than  $\gamma n^{\frac{1}{d}}$  is bounded by the number of locations multiplied by the probability that step  $\tau$  is the first to admit a deviation cluster of size  $\gamma' n^{\frac{1}{d}}$ , maximized over  $\tau$ . This leads us to prove the following claim:

**Claim 12.3.** *There exist constants  $c_3, c_4, c_5, c_6, \alpha \in \mathbb{R}^+$ , such that for any integer  $s$  and for any step  $\tau$  in the standard order of  $\tilde{C}[\mathcal{E}]$ , the probability that  $\tau$  is the first step where there is a deviation cluster of size greater than  $s$  is less than:*

$$c_3(w + 2\mu)\mu n^2 (\alpha p^{c_4})^s + c_5((w + 2\mu)\mu n^2)^2 (\alpha p^{c_6})^{\frac{1}{2d}n^{\frac{1}{d}}}$$

*Proof.* Denote by  $B_\tau$  the event where  $\tau$  is the first step to have a deviation cluster of size greater than  $\frac{1}{2}n^{\frac{d'}{d}}$ , and by  $A_\tau$  the event where all explanations of deviation clusters up to and including step  $\tau$  have fewer than  $\frac{1}{d}n^{\frac{1}{d}}$  edges. Thus:

$$\Pr_{\sim \mathcal{N}_{\mathcal{E}}} [B_\tau] \leq \Pr_{\sim \mathcal{N}_{\mathcal{E}}} [B_\tau | A_\tau] + \Pr_{\sim \mathcal{N}_{\mathcal{E}}} [\bar{A}_\tau]$$

We begin by bounding the contribution of the right term. According to Corollary 9.3, there exists a constant  $c_1$ , depending only on  $d$ , such that the ratio of leaves to edges in the explanation is at least  $c_1$ . By Claim 11.3, it follows that any such explanation has more than  $\frac{1}{d}n^{\frac{1}{d}}$  edges containing a subtree with fewer than  $\frac{1}{2d}n^{\frac{1}{d}}$  edges, with a leaves-to-edges ratio greater than  $\frac{1}{2}c_1$ . Using the union bound, we bound the probability

that there is a vertex in the base graph that is a root of such a subtree.

$$\Pr_{\sim \mathcal{N}_\varepsilon}[\bar{A}_\tau] \leq \bigcup_{v \in V_o, \tau' \leq \tau} \Pr_{\sim \mathcal{N}_\varepsilon}[v \text{ is a root of subtree in } \mathcal{H}_{\tau'} \\ \text{with less than } \frac{1}{2d} n^{\frac{1}{d}} \text{ edges and more than } \frac{1}{2} c_1 \frac{1}{2d} n^{\frac{1}{d}} \text{ leaves}]$$

Now, since any two connected vertices are at a space distance of at most

$$\max\{\mathbf{Size}(\text{arrow}), \mathbf{Size}(\text{fork})\} \leq d' \leq d$$

It follows that all the vertices in the subtree are at a space distance of at most  $n^{\frac{1}{d}}$  from each other. Thus, no two of them have the same space coordinate modulo  $n$ . In particular, projecting the infinite plane back to the finite Toric sends each of the leaves of the subtree to a unique target, and therefore the number of faults that induce the explanation is at least:

$$\frac{1}{2^{d'}} \frac{1}{4d} c_1 n^{\frac{1}{d}}$$

Plugging into the union bounds yields

$$\Pr_{\sim \mathcal{N}_\varepsilon}[\bar{A}_\tau] \leq \tau \cdot 3(w + 2\mu)6\mu n^2 \alpha^{\frac{1}{2d} n^{\frac{1}{d}}} p^{\frac{1}{2^{d'}} \frac{1}{4d} c_1 n^{\frac{1}{d}}} \leq ((w + 2\mu)6\mu n^2)^2 \left( \alpha p^{\frac{1}{2^{d'+1}} c_1} \right)^{\frac{1}{2d} n^{\frac{1}{d}}}$$

It remains to bound the term. By Claim 9.2, there is a constant  $c_2$  depending only on  $d$ , such that any explanation of a slice of size  $s$  has at least  $c_2 s$  edges. Therefore, it suffices to bound the probability that the 'analysis Toom's contour',  $\mathcal{H}_\tau$  admits an explanation with more than  $c_2 s$  edges. Since the event is conditioned on the event  $A_\tau$ , no explanation has more than  $\frac{1}{d} n^{\frac{1}{d}}$  edges. Thus, the same argument as above shows that the projection of each explanation tree into the finite toric sends its leaves to unique targets. Hence, we obtain:

$$\Pr_{\sim \mathcal{N}_\varepsilon}[B_\tau | A_\tau] \leq \bigcup_{v \in V_o, x \geq c_2 s} \Pr_{\sim \mathcal{N}_\varepsilon}[v \text{ is a root of explanation with number of edges } x | A_\tau] \\ \leq \sum_{x=c_2 s}^{\infty} (w + 2\mu)6\mu n^2 \left( \alpha p^{\frac{1}{2^{d'}} c_2} \right)^x = (w + 2\mu)6\mu n^2 \frac{\left( \alpha p^{\frac{1}{2^{d'}} c_2} \right)^s}{1 - \left( \alpha p^{\frac{1}{2^{d'}} c_2} \right)}$$

Combing the bounds we have:

$$\Pr_{\sim \mathcal{N}_\varepsilon}[B_\tau] \leq (w + 2\mu)6\mu n^2 \frac{\left( \alpha p^{\frac{1}{2^{d'}} c_2} \right)^{c_2 s}}{1 - \left( \alpha p^{\frac{1}{2^{d'}} c_2} \right)} + ((w + 2\mu)6\mu n^2)^2 \left( \alpha p^{\frac{1}{2^{d'+1}} c_1} \right)^{\frac{1}{2d} n^{\frac{1}{d}}}$$

□

Now, combined with Claim 3.15, with a probability greater than:

$$1 - \Theta(((w + 2\mu)\mu n^2)^3) (\alpha p^{c\tau})^{\gamma' n^{\frac{1}{d}}}$$

No error cluster has a size greater than  $\gamma n^{\frac{1}{d}}$ , so the decoder successfully restores the logical state; in other words, no logical error occurs.  $\square$

**Theorem 12.4.** *There exists a constant  $p_0 \in (0, 1)$  such that for any local stochastic noise channel  $\mathcal{E}$  with rate  $p < p_0$ , and a quantum circuit  $C$  with depth  $\mu$  and width  $w$ , there exists a toric encoded circuit  $\tilde{C}$ , with depth  $\mu n$  and width  $wn + 2\mu n$  that simulates  $C$  with probability:*

## References

- [BS88] Piotr Berman and J'anos Simon. "Investigations of fault-tolerant networks of computers". In: *Proceedings of the Twentieth Annual ACM Symposium on Theory of Computing*. STOC '88. Chicago, Illinois, USA: Association for Computing Machinery, 1988, pp. 66–77. ISBN: 0897912640. DOI: [10.1145/62212.62219](https://doi.org/10.1145/62212.62219). URL: <https://doi.org/10.1145/62212.62219>.
- [AB99] Dorit Aharonov and Michael Ben-Or. *Fault-Tolerant Quantum Computation With Constant Error Rate*. 1999. arXiv: [quant-ph/9906129](https://arxiv.org/abs/quant-ph/9906129) [quant-ph].
- [Den+02] Eric Dennis et al. "Topological quantum memory". In: *Journal of Mathematical Physics* 43.9 (Sept. 2002), pp. 4452–4505. DOI: [10.1063/1.1499754](https://doi.org/10.1063/1.1499754). URL: <https://doi.org/10.1063/1.1499754>.
- [Ali+08] R. Alicki et al. *On thermal stability of topological qubit in Kitaev's 4D model*. 2008. arXiv: [0811.0033](https://arxiv.org/abs/0811.0033) [quant-ph]. URL: <https://arxiv.org/abs/0811.0033>.
- [Got14] Daniel Gottesman. *Fault-Tolerant Quantum Computation with Constant Overhead*. 2014. arXiv: [1310.2984](https://arxiv.org/abs/1310.2984) [quant-ph].
- [Bom15] Héctor Bombín. "Gauge color codes: optimal transversal gates and gauge fixing in topological stabilizer codes". In: *New Journal of Physics* 17.8 (Aug. 2015), p. 083002. DOI: [10.1088/1367-2630/17/8/083002](https://doi.org/10.1088/1367-2630/17/8/083002). URL: <https://doi.org/10.1088/1367-2630/17/8/083002>.
- [FGL18] Omar Fawzi, Antoine Grosse, and Anthony Leverrier. "Constant Overhead Quantum Fault-Tolerance with Quantum Expander Codes". In: *2018 IEEE 59th Annual Symposium on Foundations of Computer Science (FOCS)*. IEEE, Oct. 2018, pp. 743–754. DOI: [10.1109/focs.2018.00076](https://doi.org/10.1109/focs.2018.00076). URL: <http://dx.doi.org/10.1109/FOCS.2018.00076>.
- [Gro19] Antoine Grosse. "Constant time decoding of quantum expander codes and application to fault-tolerant quantum computation". Theses. Sorbonne Université, Nov. 2019. URL: <https://theses.hal.science/tel-03364419>.

- [KP19] Aleksander Kubica and John Preskill. “Cellular-Automaton Decoders with Provable Thresholds for Topological Codes”. In: *Physical Review Letters* 123.2 (July 2019). ISSN: 1079-7114. DOI: [10.1103/physrevlett.123.020501](https://doi.org/10.1103/physrevlett.123.020501). URL: <http://dx.doi.org/10.1103/PhysRevLett.123.020501>.
- [Gac21] Peter Gacs. *A new version of Toom’s proof*. 2021. arXiv: [2105.05968](https://arxiv.org/abs/2105.05968) [cs.FL]. URL: <https://arxiv.org/abs/2105.05968>.
- [BB24] Nikolas P. Breuckmann and Simon Burton. “Fold-Transversal Clifford Gates for Quantum Codes”. In: *Quantum* 8 (2024), p. 1372. ISSN: 2521-327X. DOI: [10.22331/q-2024-06-13-1372](https://doi.org/10.22331/q-2024-06-13-1372). URL: <http://dx.doi.org/10.22331/q-2024-06-13-1372>.
- [GV24] Alexandre Guernut and Christophe Vuillot. *Fault-Tolerant Constant-Depth Clifford Gates on Toric Codes*. 2024. arXiv: [2411.18287](https://arxiv.org/abs/2411.18287) [quant-ph]. URL: <https://arxiv.org/abs/2411.18287>.
- [NP25] Quynh T. Nguyen and Christopher A. Pattison. *Quantum fault tolerance with constant-space and logarithmic-time overheads*. 2025. arXiv: [2411.03632](https://arxiv.org/abs/2411.03632) [quant-ph]. URL: <https://arxiv.org/abs/2411.03632>.
- [BDL26] Shankar Balasubramanian, Margarita Davydova, and Ethan Lake. “A local automaton for the 2D toric code”. In: *Quantum* 10 (2026), p. 2125. ISSN: 2521-327X. DOI: [10.22331/q-2026-06-02-2125](https://doi.org/10.22331/q-2026-06-02-2125). URL: <http://dx.doi.org/10.22331/q-2026-06-02-2125>.
- [DST26] Gesa Dünnweber, Georgios Styliaris, and Rahul Trivedi. *Quantum Memory and Autonomous Computation in Two Dimensions*. 2026. arXiv: [2601.20818](https://arxiv.org/abs/2601.20818) [quant-ph]. URL: <https://arxiv.org/abs/2601.20818>.