

# Improved 3D U-Net for Brain Tumor Segmentation on BraTS Dataset

Cecchin Andrea

andrea.cecchin.5@studenti.unipd.it

Dugo Alberto

alberto.dugo@studenti.unipd.it

Soldà Matteo

matteo.solda.1@studenti.unipd.it

## Abstract

This paper presents a deep learning framework based on the U-Net architecture for the task of brain tumor segmentation. Utilizing the publicly available BraTS Challenge dataset for training and evaluation, the proposed model leverages multimodal MRI data to generate precise segmentations of tumor regions. By addressing this critical challenge in clinical oncology within a single architecture, the approach demonstrates the potential of integrated deep learning solutions for comprehensive and clinically relevant analysis of brain tumors.

## 1. Introduction

CBTRUS[13] maintains and regularly updates a registry of malignant and non-malignant brain tumors. In global data, the incidence of malignant brain tumors is approximately 3.5 per 100,000 people. This incidence increases to 3.9 for the male population and 3.1 for the female population. This indicates that approximately 173,699 men and 148,032 women are diagnosed with brain tumors each year, for a total of 321,731 individuals. The average annual mortality in the United States alone between 2017 and 2021 was 4.41 per 100,000 people. This represents a death of 17,411 people per year, or 48 deaths per day.

Brain Tumor Segmentation Challenge is an annual competition, firstly launched by the Perelman School of Medicine[12] in 2012, focused on evaluating the performance of algorithms in tasks related to the segmentation of brain tumors in multimodal MRI scans. In particular, our work focused on the segmentation of gliomas, which is the task of recognizing a tumor region if present.

It requires the segmentation of the three typical regions which characterize a brain tumor:

- Enhancing Tumor: it is the region of a brain tumor characterized by the presence of a disrupted blood-brain barrier.

- Peritumoral Edema: it is the swelling of tissue surrounding a brain tumor, caused by the accumulation of fluid.
- Necrotic and Non-Enhancing Tumor Core: it is the central region of a brain tumor that contains dead tissue.

Being able to correctly identify and classify tumor areas is a highly important task, because it increases the survival rate of patients. Despite that, those tasks are extremely challenging. The difficulty, and the reason why tumor segmentations are performed by human experts, lies in the challenge of visualizing certain tumor areas in MRI scans.

Indeed, while peritumoral edema is easily visible even without image preprocessing or contrast modification, the Enhancing Tumor is only visible in post-contrast scans, where it appears brighter. Even more difficult is the segmentation of the Necrotic and Non-Enhancing Tumor Core, which does not show contrast enhancement in MRI scans.

Modeling and training a deep neural network to perform these tasks would decrease the time required to accurately identify tumor regions in MRI scans, potentially increasing the accuracy of human-made segmentations.

## 2. Related Works

The most cited work about tumor segmentation made through Deep Learning Networks is the one written by Havaei et Al.[6] that presents a Convolutional Neural Network that exploits local features and some global contextual features at the same time. This specific model is implemented through a fully connected layer which allows a 40 fold speed up and a 2-phase training procedure. The overall dice score of this model is of 0.86 (complete regions), 0.86 (core regions) and 0.77 (enhancing tumor regions). There is also an article made by Gordillo et Al.[5] that explores the state of the art of MRI brain tumor segmentation, comparing various models. In the literature, there are also

some works that focus on the segmentation of brain tumors in MRI scans using 3D U-Net architectures [4, 3, 11]. Recent models, such as LIU-Net [1] and BTIS-Net [10] have further explored lightweight 3D U-Net variant with significant reduction in parameters while maintaining competitive performance.

### 3. Dataset

For this project, we used the official dataset[9] provided for the BraTS Challenge held in 2020, obtained from the Kaggle dataset repository. The data comprises the combination of 19 different clinical datasets created using various protocols and scanners, encompassing MRI scans from 494 patients.

For each patient, four different three-dimensional brain scans are provided. T1-weighted MRI emphasizes anatomical details, providing good contrast between gray matter and white matter structures. T1 contrast-enhancing (T1ce) is acquired after gadolinium-based contrast agent administration, where the contrast accumulates in areas with high vascular permeability, causing tumors to appear brighter than surrounding tissues. The T2 scan highlights water-rich areas such as edema, while T2-FLAIR (Fluid Attenuated Inversion Recovery) suppresses cerebrospinal fluid signals, enabling better visualization of brain lesions.

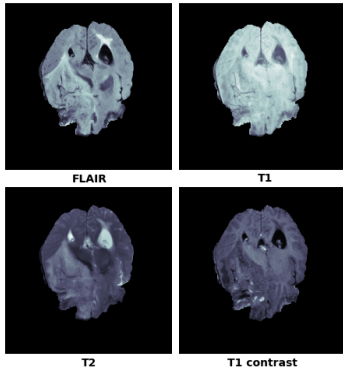


Figure 1. Example of an MRI scan with FLAIR, T1, T2 and T1 contrast-enhancing.

The images were preprocessed with all scans re-aligned and resampled to a uniform voxel size of  $1\text{ mm}^3$ , and non-brain tissues including skull and scalp were removed. For the 369 patients in the training set, manual segmentations of tumor areas were created, verified, and validated by expert neuroradiologists, serving as ground truth for model training and validation.

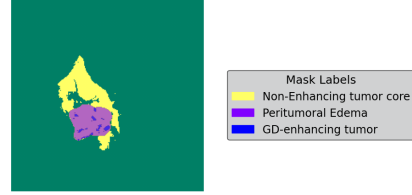


Figure 2. A colored version of the manual segmentation provided for a patient in the training set.

The dataset was structured for volumetric analysis with input tensors of dimensions  $[B, C, H, W, D] = [2, 4, 240, 240, 155]$ , where  $B$  represents the batch size,  $C$  corresponds to the four MRI modalities, and  $H \times W \times D$  defines the spatial dimensions. Prior to model input, intensity normalization was applied independently for each modality using z-score standardization, ensuring zero mean and unit variance within the brain region.

### 4. Method

Our model implements a customized 3D U-Net architecture specifically designed for volumetric brain tumor segmentation in multimodal MRI scans.

#### 4.1. Architecture

We developed an improved 3D U-Net variant with an exceptionally lightweight structure, optimized for efficient tumor subregion delineation. The network is designed to be as compact as possible while preserving high segmentation accuracy. It comprises a total of 340,596 parameters, corresponding to approximately 1.30 MB of memory during inference (assuming 32-bit floating-point precision).

The architecture follows an encoder-decoder structure with three resolution levels, connected via skip connections to retain spatial context. Each encoder block applies a 3D convolution (Conv3d) to process volumetric MRI data across spatial and depth dimensions, followed by Instance Normalization and LeakyReLU activation. The network is tailored for the BraTS 2020 dataset, where each input volume, as we mention before, contains four MRI modalities (T1, T1ce, T2, FLAIR), stacked as input channels. The initial Conv3d layer takes this 4-channel input and produces multiple feature maps, capturing localized 3D features relevant to tumor segmentation. Downsampling between levels is performed using 3D max pooling with a stride of 2. The decoder path mirrors the encoder, progressively upsampling and refining features to reconstruct segmentation outputs. To mitigate overfitting, a dropout layer with a rate of 0.3 is inserted prior to the final  $1 \times 1 \times 1$  convolutional layer, which maps feature representations to the output segmenta-



The first alternative architecture was a variant of the final selected one, featuring an additional fourth resolution level in the encoder path and a symmetric decoder. This version retained the same design principles, including skip connections and a residual-like structure for each block. The resulting two models, based on this, comprise a total of 2,867,956 parameters for the smallest version, and 11,465,188 in the other. Also this model is available on Hugging Face at the following link: <https://huggingface.co/andreacecchin/vision/tree/main>.

The second and last alternative architecture that was developed and tested includes another additional block in the encoder path, resulting in a model with five resolution levels in the encoder and four in the decoder. This architecture was used to generate two models: one that contains a total of 11,536,756 parameters, approximately 34 times more than the selected model, and the other 46,137,060, 135 times the chosen one. This last architecture is also available on Hugging Face at the following link: <https://huggingface.co/dugoalberto/BratsCVDeeper>.

The decision to test models with varying numbers of parameters was made in an effort to investigate the correlation between model performance, in terms of the Dice Score of the predicted segmentations compared to the ground truth masks, and model complexity, with the aim of identifying the optimal trade-off.

The model evaluation phase was carried out by splitting the training dataset into a training set and a validation set, using the former to train the models and the latter to assess performance in terms of Dice Score and loss function. In particular, in order to accelerate this phase, all the models were trained using a subset of slices for each MRI scans.

Interestingly, despite significant differences in depth and number of parameters, the tested architectures yielded models with consistently strong and highly comparable performance in terms of Dice Similarity Coefficient for segmentation prediction. For this reason, the architecture with 340,596 parameters was preferred, as it offered the best trade-off between performance and computational complexity. In parallel with these experiments, different combinations of weights for Cross-Entropy and Dice Loss were attempted, leading to the final combined loss already presented in section 4.2.

## 5.2. Training

The training process was designed to ensure stability, performance, and efficiency throughout all epochs. The model was trained using a supervised learning setup on all slices comprising the 3D MRI scans of

our dataset, with paired input MRI slices and their corresponding segmentation masks as ground truth. The training loop incorporated several best practices to optimize learning and prevent overfitting or gradient-related issues, such as early stopping to avoid overfitting and gradient clipping to mitigate the risk of exploding gradients. To improve generalization, data augmentation techniques were applied through albumentation, including random rotation and vertical and horizontal flipping, both with a probability of 0.5, which helped the model learn to be invariant to these transformations. This augmentation was applied to both the input MRI slices and their corresponding segmentation masks, ensuring that the model learned robust features.

After every forward pass, predictions is extracted from the model outputs and compared with the ground truth segmentation, computing loss and Dice Score to evaluate segmentation performance for each batch. The average Dice Score and training loss is computed over the entire epoch to monitor learning progress.

The validation phase follows the same structure, evaluating the model on a separate validation set using the same loss function and Dice metric.

To prevent overfitting, early stopping is implemented. The validation loss is monitored across epochs, and training is terminated early if the loss did not improve beyond a minimum threshold for a predefined number of consecutive epochs.

Specifically, we decided to use GradScaler from PyTorch to automatically scale the gradients during back-propagation, which helps prevent numerical instability and allows for larger learning rates. The model was trained using the AdamW optimizer with a starting learning rate of  $5e - 4$  and a weight decay of  $5e - 4$ . The learning rate was adjusted step-by-step using a ReduceLROnPlateau scheduler, which reduces the learning rate by a factor of 0.5 if the validation loss does not improve for 2 consecutive epochs and fixing a lower bound of  $1e - 6$ . This adaptive learning rate strategy helps the model converge more effectively by allowing it to take larger steps initially and then fine-tune as it approaches a minimum.

During training, model checkpoints are periodically saved every 5 epochs to allow for recovery and future analysis. In addition, a separate checkpoint is saved whenever the model achieved a new highest Dice Score on the validation set. This best-performing model, based on validation performance, is retained and ultimately selected for evaluation on the test set, ensuring that only the most effective model in terms of segmentation quality is actually used for the final inference.



Figure 4. Progression of Loss, Dice Score and learning rate over training epochs.

### 5.3. Results

The proposed encoder-decoder architecture demonstrated substantial effectiveness in automated brain tumor segmentation using 3D MRI imaging data. The model achieved a Dice Score of 0.79 on the validation set, indicating strong overlap between predicted segmentation mask and ground truth annotations. This performance level represent a clinically relevant accuracy threshold in support of human radiologists in identifying and delineating tumor regions. The three-class segmentation task presented significant challenges due to the distinct imaging characteristics and spatial relationships between the three tumor subregions. The achieved Dice Score places the model within the competitive range of the modern state-of-the-art methods for brain tumor segmentation, that typically reports a score between 0.75 and 0.85.

The results of the presented model were evaluated epoch by epoch on the validation set (also because the test set was not available on Kaggle at the time of writing this paper) and compared with the results of the other two architectures presented in section 5.1. As previously mentioned, the final model had a Dice Score of 79% and some examples are shown in Figure 6 and 7.

Comparing our model directly with other two present in the literature, our performance aligns also with state-of-the-art lightweight methods like those reviewed pattern in [2] and in [8], which also achieve competitive results with significantly fewer parameters reporting a Dice Score between 0.75 and 0.82.

In the notebook is also provided the possibility to evaluate separately every single class of the segmentation, which is useful to understand how the model performs on each of the three classes. The result can

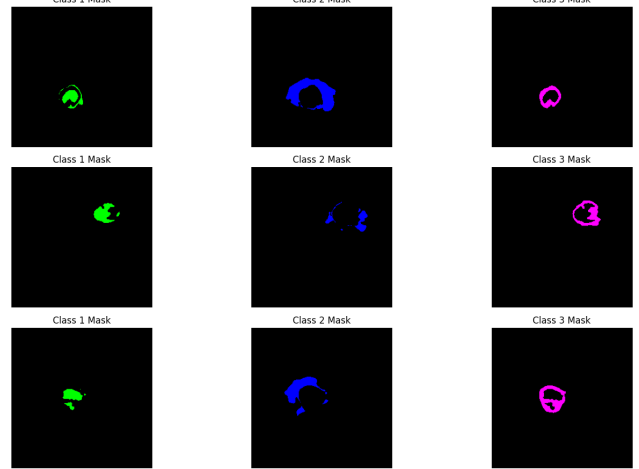


Figure 5. The segmentation results of the model on the validation set, separated by class.

be seen at Figure 5.

## 6. Conclusions

This works presents a lightweight 3D U-Net architecture for automated brain tumor segmentation using multimodal MRI data from the BraTS Challenge dataset. The proposed model achieved a Dice Score of 79% with only 340.596 parameters, demonstrating that effective segmentation performance can be maintained while significantly reducing computational complexity. The combined loss function approach, integrating Cross-Entropy and Dice Loss with weights respectively of 30% and 70% proved effective in addressing class imbalance challenges inherent in medical image segmentation tasks.

The clinical relevance of this research could also lead to practical deployment along the support of radiologists and oncologist in the analysis of brain tumors, potentially improving diagnostic accuracy and treatment planning also. The minimal memory footprint of 1.30MB makes the model suitable for integration into existing clinical workflow without requiring specialized hardware infrastructure.

Future work should address several key areas for improvement and extension. First of all, validation on diverse clinical datasets beyond BraTS Challenge data would establish the generalizability of the proposed architecture across different imaging protocols and patient populations.

Then, the second point, investigation of advanced data augmentation techniques could potentially improve model robustness and performance on edge cases.

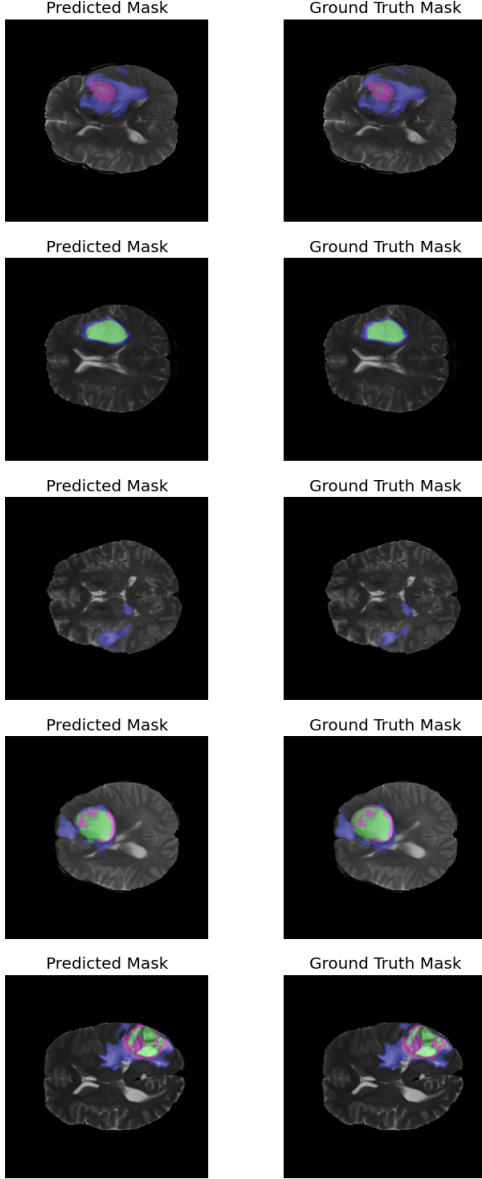


Figure 6. First example of segmentation results on the validation set. The first column shows the predicted segmentation, while the second column shows the ground truth segmentation.

And lastly, the integration of attention mechanisms within the lightweight framework could enhance the model’s ability to focus on critical tumor boundary regions without significantly increasing computational overhead.

The development of ensemble methods combining multiple lightweight models could also be investigated to potentially improve overall segmentation accuracy while maintaining computational efficiency.

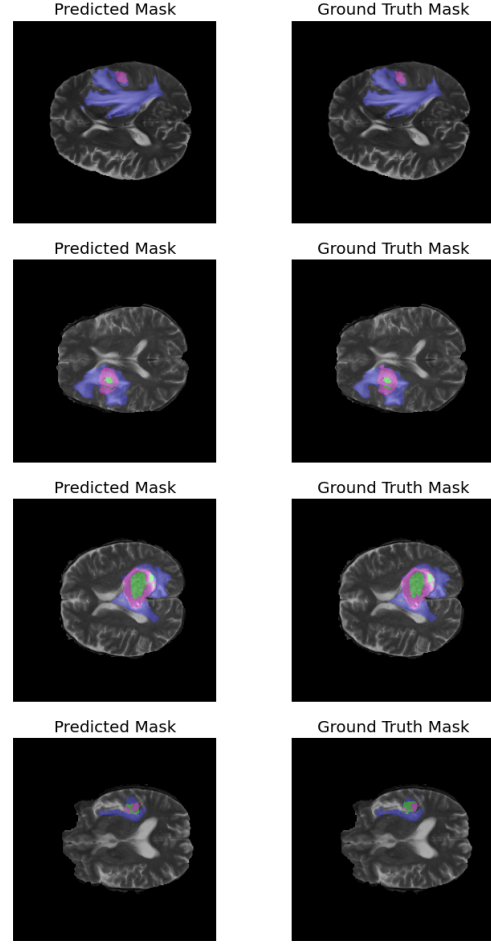


Figure 7. Second example of segmentation results on the validation set. The first column shows the predicted segmentation, while the second column shows the ground truth segmentation.

## References

- [1] Jameel Ahmad, Amel Ksibi, Shrooq Alsenan, Arfan Arshad, Rehan Raza, and Zaffar Shaikh. Liu-net: lightweight inception u-net for efficient brain tumor segmentation from multimodal 3d mri images. *PeerJ Computer Science*, 11:e2787, 03 2025.
- [2] Dianlong An, Panpan Liu, Yan Feng, Pengju Ding, Weifeng Zhou, and Bin Yu. Dynamic weighted knowledge distillation for brain tumor segmentation. *Pattern Recognition*, 155:110731, 2024.
- [3] Syed Talha Bukhari and Hassan Mohy-ud Din. E1d3 u-net for brain tumor segmentation: Submission to the rsna-asnr-miccai brats 2021 challenge. In *International MICCAI Brainlesion Workshop*, pages 276–288. Springer, 2021.
- [4] Hao Dong, Guang Yang, Fangde Liu, Yuanhan Mo, and Yike Guo. Automatic brain tumor detection and segmentation using u-net based fully convolutional

- networks. In Medical Image Understanding and Analysis: 21st Annual Conference, MIUA 2017, Edinburgh, UK, July 11–13, 2017, Proceedings 21, pages 506–517. Springer, 2017.
- [5] Nelly Gordillo, Eduard Montseny, and Pilar Sobrevilla. State of the art survey on mri brain tumor segmentation. *Magnetic Resonance Imaging*, 31(8):1426–1438, 2013.
  - [6] Mohammad Havaei, Axel Davy, David Warde-Farley, Antoine Biard, Aaron Courville, Yoshua Bengio, Chris Pal, Pierre-Marc Jodoin, and Hugo Larochelle. Brain tumor segmentation with deep neural networks. *Medical Image Analysis*, 35:18–31, 2017.
  - [7] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Delving deep into rectifiers: Surpassing human-level performance on imagenet classification. In *Proceedings of the IEEE International Conference on Computer Vision (ICCV)*, December 2015.
  - [8] Fernando Daniel Hernandez-Gutierrez, Eli Gabriel Avina-Bravo, Daniel F. Zambrano-Gutierrez, Oscar Almanza-Conejo, Mario Alberto Ibarra-Manzano, Jose Ruiz-Pinales, Emmanuel Ovalle-Magallanes, and Juan Gabriel Avina-Cervantes. Brain tumor segmentation from optimal mri slices using a lightweight u-net. *Technologies*, 12(10), 2024.
  - [9] Kaggle. Kaggle brats2020 dataset.
  - [10] Li Liu and Kaijian Xia. Btis-net: Efficient 3d u-net for brain tumor image segmentation. *IEEE Access*, 12:133392–133405, 2024.
  - [11] Andriy Myronenko and Ali Hatamizadeh. Robust semantic segmentation of brain tumor regions from 3d mris. In *International MICCAI Brainlesion Workshop*, pages 82–89. Springer, 2019.
  - [12] Perelman School of Medicine University of Pennsylvania. Brain tumor segmentation (brats) challenge.
  - [13] CBTRUS Central Brain Tumor Registry of the United States. Cbtrus fact sheet.