

XlCalcNet Documentation

Release 1.3.0

Dietrich Hadler

November 11, 2026

Welcome to the documentation of **XlCalcNet**, an addin for MS E**x**ce**l** and LibreOffice **Calc**, based on Python**Net**. This edition of the documentation describes release 1.3.0.

XlCalcNet is free software released under the Mozilla Public License 2.0 (see *License*).

The git repository is https://github.com/duhadler/xlcalcnet)

This documentation is available online at https://duhadler.github.io/XlCalcNetDocsHTML/.

The pdf can be downloaded from https://github.com/duhadler/DocsXlCalcNet/raw/master/pdf/xlcalcnet.pdf.

Copyright © 2020-2026 Dietrich Hadler

PREFACE

Spreadheet formulas (as used in MS Excel and LibreOffice Calc) are probably the most widely used programming language in the world. In addition to the built-in formulas, there is also the option to write user-defined functions (UDFs) in the Basic dialects of these programs.

XlCalcNet extends these options by providing an additional set of functions which are accessible through the function dialog (MS Excel) or function wizard (LibreOffice Calc), and expect as first argument a string containing code written in Python. This code can call any function that is available in the underlying Python installation (currently supported are versions 3.8 - 3.15), which the user can populate with additional packages as needed.

Contents

Preface i

I Getting started 1

1 Setup and general usage 2

1.1 Setting up XlCalcNet . . . 3
1.1.1 Installing XlCalcNet . . . 3
1.1.2 Installing and using Python.NET: Calling C# from Python . . . 5
1.1.3 Installing and using the Tiny IDE as a Python application . . . 6
1.1.4 Installing and using Numpy, Matplotlib, Pandas, Scipy, Seaborn, Statsmodels and Scikit-learn . . . 20
1.1.5 Calling Python from C:#: socket server vs in-process calls . . . 34
1.1.6 Reasons for using multiprecision arithmetic . . . 39
1.1.7 Rebuilding the .dll files of XlCalcNet and XlCalcNet2 from source code . . . 41
1.2 Using XlCalcNet within MS Excel . . . 42
1.2.1 Preparing MS Excel for using XlCalcNet . . . 42
1.2.2 Using the Python standard library functions within spreadsheet formulas . . . 43
1.2.3 Using Numpy, Matplotlib, Pandas, Scipy, Seaborn and XlCalcNet within spreadsheet formulas . . . 45
1.2.4 Using dynamic arrrays in MS Excel . . . 51
1.2.5 Managing procedures instead of functions . . . 53
1.2.6 Uninstalling . . . 54
1.3 Using XlCalcNet within LibreOffice Calc . . . 55
1.3.1 Preparing LibreOffice Calc for using XlCalcNet . . . 55
1.3.2 Using the Python standard library functions within spreadsheet formulas . . . 55
1.3.3 Using Numpy, Matplotlib, Pandas, Scipy, Seaborn and XlCalcNet within spreadsheet formulas . . . 58
1.3.4 Using links to external `*.csv`, `*.xlsx` and `*.svg` files . . . 64
1.3.5 Managing procedures instead of functions . . . 71
1.3.6 Exporting and uninstalling . . . 72
1.4 General user interface and functions . . . 74
1.4.1 The Tiny Data Viewer . . . 74
1.4.2 The Output Monitor . . . 76
1.4.3 The Gallery of Plots . . . 78
1.4.4 Interactive 3D wpf plots . . . 83
1.4.5 Functions related to folders . . . 91
1.4.6 Information about installation status of supporting python packages . . . 92
1.4.7 Information about context lists, and setting global precision . . . 93
1.4.8 Support for running interactive Matplotlib output in a separate process . . . 94
1.5 Mathematical functions based on Mpmath, Gmpy2 and Python-Flint (only Python) . . . 95
1.5.1 Overview . . . 95
1.5.2 Double-precision arithmetic: `fpm` . . . 98
1.5.3 Binary floating-point with arbitrary-precision and exponent: `mpm` . . . 102
1.5.4 Interval arithmetic with arbitrary-precision and exponent:`ipm` . . . 106
1.5.5 Decimal floating-point in arbitrary-precision with limited exponent: `dpm` . . . 110

1.5.6 Rational numbers: qpm . . . 115
1.5.7 Binary floating-point in arbitrary-precision with limited exponent: gpm . . . 117
1.5.8 Binary balls in arbitrary-precision and with arbitrary exponent: apm . . . 122
1.5.9 Numpy support for multiprecision data types: npm . . . 126
1.6 Mathematical functions in fixed precision (C#, can be called from Python) . . . 127
1.6.1 C# based context groups . . . 127
1.6.2 Scalar functions with Double and Complex: math53 and cmath53 . . . 128
1.6.3 Binary floating point, single precision: sreal and scplx . . . 134
1.6.4 Binary floating point, double precision: dreal and dcplx . . . 140
1.6.5 Binary floating point, extended precision: ereal and ecplx . . . 146
1.6.6 Binary floating point, quadruple precision: qreal and qcplx . . . 152
1.6.7 Binary floating point, octuple precision: oreal and ocplx . . . 158
1.6.8 Use of Numpy with scalar functions written in C#: np53, np53c . . . 163
1.6.9 Building the underlying C#, C/C++ and Pascal libraries . . . 164
1.7 Mathematical functions based on XlCalcNet2 (C#, can be called from Python) . . . 165
1.7.1 Binary floating point, multiple precision: mreal, mcplx . . . 165
1.7.2 Binary arbitrary precision ball: aflint and aflintc . . . 171
1.7.3 Binary floating point, single precision: sflint and sflintc . . . 176
1.7.4 Binary floating point, double precision: dflint and dflintc . . . 180
1.7.5 Binary floating point, extended precision: eflint and eflintc . . . 184
1.7.6 Binary floating point, quadruple precision: qflint and qflintc . . . 188
1.7.7 Binary floating point, octuple precision: oflint and oflintc . . . 192
1.7.8 Binary floating point, multiple precision: mflint, mflintc . . . 196
1.7.9 Building the underlying C# and C/C++ libraries . . . 199
1.8 Building user libraries and documenting them . . . 200
1.8.1 Building a library of user defined Python functions . . . 200
1.8.2 Building a library of user defined functions in C# . . . 200
1.8.3 Sphinx: building documentation for software with Python (html and pdf) . . . 200

2 Basic floating point functions **201**
2.1 General real functions . . . 201
2.1.1 Fused multiplication and addition: $\mathrm{fma}(x, y, z)$ . . . 201
2.1.2 Maximum of two floating point numbers: $\mathrm{fmax}(x, y)$ . . . 202
2.1.3 Minimum of two floating point numbers: $\mathrm{fmin}(x, y)$ . . . 202
2.2 Machine constants, general . . . 204
2.2.1 Zero, positive zero . . . 204
2.2.2 Negative zero . . . 204
2.2.3 One . . . 205
2.2.4 Positive infinity . . . 205
2.2.5 Negative infinity . . . 206
2.2.6 NaN (Not a Number) . . . 206
2.3 Properties of numbers . . . 208
2.3.1 Test for signbit . . . 208
2.3.2 Test for a finite number . . . 208
2.3.3 Test for infinity . . . 209
2.3.4 Test for positive infinity . . . 209
2.3.5 Test for negative infinity . . . 210
2.3.6 Test for NaN . . . 211
2.3.7 Test for zero . . . 211
2.3.8 Test for one . . . 212
2.3.9 Test if a number is an integer . . . 213
2.3.10 Test if a number is a simple number (not an infinity or NaN) . . . 213
2.3.11 Test if a number is a regular number (not zero, an infinity or NaN) . . . 214
2.3.12 Test if a number is a normal number (not subnormal, zero, an infinity or NaN) . . . 214

2.3.13 Test if 2 numbers are unordered . . . 215
2.3.14 Test if a number fits in a signed 32 bit integer . . . 216
2.3.15 Test if a number fits in a signed 64 bit integer . . . 216
2.4 Integer related functions . . . 218
2.4.1 Integral value nearest x (rounding to nearest): $\mathrm{nearbyint}(x), \mathrm{rint}(x)$ . . . 218
2.4.2 32 bit integer nearest x (rounding to nearest): $\mathrm{lrint}(x)$ . . . 218
2.4.3 64 bit integer nearest x (rounding to nearest): $\mathrm{llrint}(x)$ . . . 219
2.4.4 Smallest integral value not less than x : $\mathrm{ceil}(x)$ . . . 220
2.4.5 Largest integral value not greater than x : $\mathrm{floor}(x)$ . . . 220
2.4.6 Nearest integral value not greater in magnitude than x : $\mathrm{trunc}(x)$ . . . 221
2.4.7 Nearest integral value, rounding halfway cases away from zero: $\mathrm{round}(x)$ . . . 221
2.4.8 Nearest 32 bit integer, rounding halfway cases away from zero: $\mathrm{lround}(x)$ . . . 222
2.4.9 Nearest 64 bit integer, rounding halfway cases away from zero: $\mathrm{llround}(x)$ . . . 222
2.5 Floating point functions for real numbers . . . 224
2.5.1 Efficient computation of $|x| \cdot \mathrm{sign}(y)$: $\mathrm{copysign}(x, y)$ . . . 224
2.5.2 Decomposition of x as $x = m \cdot 2^e; 0.5 < m < 1$: $\mathrm{frexp}(x)$ . . . 224
2.5.3 Integral value e, from the decomposition of x as $x = m \cdot 2^e; 1 < m < 2$: $\mathrm{logb}(x)$ . . . 225
2.5.4 32 bit integer e, from the decomposition of x as $x = m \cdot 2^e; 1 < m < 2$: $\mathrm{ilogb}(x)$ . . . 226
2.5.5 Efficient computation of $x \cdot 2^e$: $\mathrm{ldexp}(x, e), \mathrm{scalbn}(x, e), \mathrm{scalbln}(x, e)$ . . . 227
2.5.6 Positive difference between x and y: $\mathrm{fdim}(x, y)$ . . . 228
2.6 Fraction and remainder related functions . . . 229
2.6.1 Integral and fractional part of a floating point number: $\mathrm{modf}(x)$ . . . 229
2.6.2 Floating point remainder: $\mathrm{fmod}(x, y)$ . . . 229
2.6.3 IEEE floating point remainder: $\mathrm{remainder}(x, y)$ . . . 230
2.6.4 IEEE floating point remainder and part of quotient: $\mathrm{remquo}(x, y)$ . . . 231
2.6.5 Fractional part of a floating point number: $\mathrm{frac}(x)$ . . . 232
2.6.6 Fractional part of a floating point number (symmetric function): $\mathrm{fractionalpart}(x)$ . . . 232
2.7 Functions related to mantissa width and exponent range . . . 234
2.7.1 Machine Epsilon . . . 234
2.7.2 Unit in the last place . . . 234
2.7.3 Largest representable number . . . 235
2.7.4 Lowest representable number . . . 235
2.7.5 Smallest representable positive number . . . 236
2.7.6 Next representable floating point number: $\mathrm{nextafter}(x, y)$ . . . 237
2.8 Mathematical Constants . . . 238
2.8.1 Degree . . . 238
2.8.2 Golden ratio phi . . . 238
2.8.3 Natural logarithm of 2 . . . 239
2.8.4 Natural logarithm of 10 . . . 239
2.8.5 Pi (π) . . . 240
2.8.6 Euler e . . . 240
2.8.7 Euler-Mascheroni constant γ . . . 241
2.8.8 Apéry's constant . . . 241
2.8.9 Catalan's constant . . . 242
2.8.10 Glaisher's constant . . . 243
2.8.11 Khinchin's constant . . . 243

3 Elementary scalar functions (real and complex) 245
3.1 Complex components . . . 245
3.1.1 Absolute value of a real or complex number . . . 245
3.1.2 Sign of a real or complex number . . . 247
3.1.3 Real part of a real or complex number . . . 248
3.1.4 Imaginary part of a real or complex number . . . 250
3.1.5 Phase (or argument) of a real or complex number . . . 251

3.1.6 Conjugate of a real or complex number . . . 253
3.1.7 Polar representation of a real or complex number . . . 254
3.1.8 Rectangular coordinates calculated from the polar representation of a real or complex number . . . 256
3.1.9 Imaginary One . . . 256
3.2 Roots and quadratic, cubic, and quartic equations . . . 257
3.2.1 Square root, $\mathrm{sqrt}(x) = \sqrt{x}$ . . . 257
3.2.2 Reciprocal square root, $\mathrm{rsqrt}(x) = 1/\sqrt{x}$ . . . 259
3.2.3 Auxiliary function $\mathrm{sqrt1pm1}(x) = \sqrt{1+x} - 1$ . . . 260
3.2.4 Cube root, $\mathrm{cbrt}(x) = \sqrt[3]{x}$ . . . 262
3.2.5 Nth root, $\mathrm{root_si}(x, n) = \sqrt[n]{x}$ . . . 263
3.3 Exponential and related functions . . . 266
3.3.1 Exponential function $\exp(x) = e^x$ . . . 266
3.3.2 Auxiliary function $\mathrm{expj}(x) = e^{ix}$ . . . 268
3.3.3 Auxiliary function $\mathrm{expjpi}(x) = e^{i\pi x} = (-1)^x$ . . . 269
3.3.4 Exponential function with base 10, $\mathrm{exp10}(x) = 10^z$ . . . 271
3.3.5 Exponential function with base 2, $\mathrm{exp2}(x) = 2^x$ . . . 273
3.3.6 Auxiliary function $\mathrm{expm1}(x) = e^x - 1$ . . . 274
3.3.7 Auxiliary function $\mathrm{exp10m1}(x) = 10^x - 1$ . . . 276
3.3.8 Auxiliary function $\mathrm{exp2m1}(x) = 2^x - 1$ . . . 277
3.4 Logarithms and related functions . . . 280
3.4.1 Logarithm $\log(x[, base])$ . . . 280
3.4.2 Logarithm with base 10, $\mathrm{log10}(x) = \log_{10}(x)$ . . . 282
3.4.3 Logarithm with base 2, $\mathrm{log2}(x) = \log_2(x)$ . . . 283
3.4.4 Auxiliary function $\mathrm{log1p}(x) = \log(x+1)$ . . . 285
3.4.5 Auxiliary function $\mathrm{log10p1}(x) = \log_{10}(1+x)$ . . . 286
3.4.6 Auxiliary function $\mathrm{log2p1}(x) = \log_2(1+x)$ . . . 288
3.5 Power functions . . . 290
3.5.1 Square, x^2 . . . 290
3.5.2 Cube, x^3 . . . 291
3.5.3 Auxiliary function $\mathrm{pow_si}(x, n) = x^n$ . . . 293
3.5.4 Auxiliary function $\mathrm{hypot}(x, y) = \sqrt{x^2 + y^2}$ . . . 295
3.5.5 Power function, $\mathrm{pow}(x, y) = x^y$ . . . 297
3.5.6 Auxiliary function, $\mathrm{powm1}(x, y) = x^y - 1$ . . . 298
3.5.7 Auxiliary function, $\mathrm{pow1p}(x, y) = (1+x)^y$ . . . 300
3.5.8 Auxiliary function, $\mathrm{pow1pm1}(x, y) = (1+x)^y - 1$ . . . 301
3.6 Trigonometric functions, in radians . . . 304
3.6.1 Sine, $\sin(x)$ . . . 304
3.6.2 Cosine, $\cos(x)$ . . . 306
3.6.3 Tangent, $\tan(x)$ . . . 308
3.6.4 Cotangent, $\cot(x)$ . . . 310
3.6.5 Cosecant, $\csc(x)$ . . . 312
3.6.6 Secant, $\sec(x)$ . . . 314
3.6.7 Cardinal sine, $\mathrm{sinc}(x)$ . . . 316
3.7 Trigonometric functions, in multiples of π . . . 318
3.7.1 Auxiliary function $\mathrm{sinpi}(x) = \sin(\pi x)$ . . . 318
3.7.2 Auxiliary function $\mathrm{cospi}(x) = \cos(\pi x)$ . . . 319
3.7.3 Auxiliary function $\mathrm{tanpi}(x) = \tan(\pi x)$ . . . 321
3.7.4 Auxiliary function $\mathrm{cotpi}(x) = \cot(\pi x)$ . . . 322
3.7.5 Auxiliary function $\mathrm{cscpi}(x) = \csc(\pi x)$ . . . 324
3.7.6 Auxiliary function $\mathrm{secpi}(x) = \sec(\pi x)$ . . . 325
3.7.7 Auxiliary function $\mathrm{sincpi}(x) = \mathrm{sinc}(\pi x)$ . . . 327
3.8 Hyperbolic functions . . . 329
3.8.1 Hyperbolic sine, $\sinh(x)$ . . . 329
3.8.2 Hyperbolic cosine, $\cosh(x)$ . . . 331

3.8.3 Hyperbolic tangent, $\tanh(x)$ . . . 333
3.8.4 Hyperbolic cotangent, $\coth(x)$ . . . 335
3.8.5 Hyperbolic cosecant, $\mathrm{csch}(x)$ . . . 337
3.8.6 Hyperbolic secant, $\mathrm{sech}(x)$ . . . 339
3.9 Inverse trigonometric functions, in radians . . . 342
3.9.1 Inverse sine, $\mathrm{asin}(x)$ . . . 342
3.9.2 Inverse cosine, $\mathrm{acos}(x)$ . . . 344
3.9.3 Inverse tangent, $\mathrm{atan}(x)$ . . . 346
3.9.4 Inverse tangent, 2 arguments, $\mathrm{atan2}(y, x)$ . . . 348
3.9.5 Inverse cotangent, $\mathrm{acot}(x)$ . . . 349
3.9.6 Inverse cosecant, $\mathrm{acsc}(x)$ . . . 351
3.9.7 Inverse secant, $\mathrm{asec}(x)$ . . . 353
3.10 Inverse hyperbolic functions . . . 355
3.10.1 Inverse hyperbolic sine, $\mathrm{asinh}(x)$ . . . 355
3.10.2 Inverse hyperbolic cosine, $\mathrm{acosh}(x)$ . . . 357
3.10.3 Inverse hyperbolic tangent, $\mathrm{atanh}(x)$ . . . 359
3.10.4 Inverse hyperbolic cotangent, $\mathrm{acoth}(x)$ . . . 361
3.10.5 Inverse hyperbolic secant, $\mathrm{asech}(x)$ . . . 363
3.10.6 Inverse Hyperbolic Cosecant, $\mathrm{acsch}(x)$ . . . 365
3.11 Factorials, Gamma and related functions . . . 368
3.11.1 Gamma function, $\Gamma(x)$ . . . 368
3.11.2 Auxiliary function $\Gamma(x+1) - 1$ . . . 369
3.11.3 Log-gamma function, $\log\Gamma(x)$ . . . 372
3.11.4 Reciprocal Gamma function, $1/\Gamma(x)$ . . . 374
3.11.5 Factorial, $x!$ . . . 376
3.11.6 Double factorial, $x!!$ . . . 378
3.11.7 Rising factorial $a^{\overline{n}} = (a)_n$ . . . 380
3.11.8 Falling factorial, $(a)^{\underline{n}} = (a-n+1)^{\overline{n}}$ . . . 382
3.11.9 Ratio of gamma functions, $\Gamma(a)/\Gamma(b)$ . . . 383
3.11.10 Gamma-delta ratio, $\Gamma(a)/\Gamma(a+\delta)$ . . . 384
3.11.11 Beta function, $B(a,b) = \Gamma(a)\Gamma(b)/\Gamma(a+b)$ . . . 386
3.11.12 Binomial coefficient, ${}_nC_k = (k \cdot B(k, n-k+1))^{-1}$ . . . 388
3.12 Miscellaneous functions . . . 390
3.12.1 Lambert W function, $W_0(x)$ . . . 390
3.12.2 Lambert W function, $W_{-1}(x)$ . . . 390
3.12.3 Lambert W (general case) . . . 391
3.12.4 Arithmetic-geometric mean . . . 392

4 Statistical Distributions **395**
4.1 Introduction to random variables and distributions . . . 395
4.1.1 Elementary symbolic algebra of random variables . . . 395
4.1.2 Linear transformations of random variables . . . 397
4.1.3 Random variables having mixture distributions . . . 398
4.1.4 Linear combinations of independent random variables . . . 399
4.1.5 The log-transform of continuous random variables . . . 400
4.2 Base class for univariate distributions . . . 401
4.2.1 Boost: Cumulative distribution function . . . 401
4.2.2 Boost: Survival function . . . 401
4.2.3 Hazard function . . . 402
4.2.4 Cumulative Hazard Function . . . 402
4.2.5 Boost: Quantile function . . . 402
4.2.6 Boost: Inverse survival function . . . 403
4.2.7 Boost: Mode . . . 403
4.2.8 Boost: Expected value (mean) . . . 403

4.2.9 Boost: Median . . . 403
4.2.10 Boost: Variance . . . 404
4.2.11 Boost: Standard deviation . . . 404
4.2.12 Boost: Skewness . . . 404
4.2.13 Boost: Kurtosis . . . 404
4.2.14 Boost: Kurtosis excess . . . 405
4.2.15 Boost: Support, lower endpoint . . . 405
4.2.16 Boost: Support, upper endpoint . . . 405
4.2.17 Boost: Range, lower endpoint . . . 406
4.2.18 Boost: Range, upper endpoint . . . 406
4.2.19 Characteristic function . . . 406
4.2.20 Moment generating function . . . 407
4.2.21 Cumulant generating function . . . 407
4.2.22 Raw Moments . . . 408
4.2.23 Central Moments . . . 408
4.2.24 Cumulants . . . 409
4.3 Base class for continuous univariate distributions . . . 410
4.3.1 Probability density function . . . 410
4.3.2 Probability sparsity function . . . 410
4.3.3 Differerential entropy . . . 411
4.3.4 Negative loglikelihood function . . . 411
4.3.5 Logarithm of the probability density function . . . 411
4.4 Base class for discrete univariate distributions . . . 412
4.4.1 Probability mass function . . . 412
4.4.2 Probability generating function . . . 412
4.4.3 Vector containing all values of the pmf . . . 413
4.4.4 Entropy . . . 413
4.4.5 Logarithm of the probability mass function . . . 414
4.5 Closed form distributions, based on elementary functions . . . 415
4.5.1 Boost: Arcsine Distribution . . . 415
4.5.2 Boost: Cauchy distribution . . . 419
4.5.3 Boost: Exponential distribution . . . 422
4.5.4 Boost: Gumbel (Generalized Extreme Value distribution Type-I) distribution . . . 426
4.5.5 Boost: Hyperexponential Distribution . . . 430
4.5.6 !!!Boost: Kumaraswamy distribution . . . 434
4.5.7 Boost: Laplace distribution . . . 438
4.5.8 Boost: Logistic distribution . . . 442
4.5.9 Boost: Pareto distribution . . . 446
4.5.10 Boost: Rayleigh distribution . . . 450
4.5.11 Boost: Triangular Distribution . . . 454
4.5.12 Boost: Uniform distribution . . . 458
4.5.13 Boost: Weibull (Minimum-Type-III) distribution . . . 462
4.5.14 Dagum (Burr Type III) distribution . . . 466
4.5.15 Fisk (log-logistic) distribution . . . 469
4.5.16 Fréchet (Maximum/Minimum-Type-II or Inverse Weibull) distribution . . . 472
4.5.17 Generalized Extreme Value (Maximum) or GEV distribution . . . 475
4.5.18 Generalized Pareto distribution . . . 478
4.5.19 Gompertz-Makeham distribution . . . 481
4.5.20 Lomax distribution . . . 484
4.5.21 Shifted Gompertz distribution . . . 487
4.5.22 Singh-Maddala (Burr Type XII) distribution . . . 490
4.6 Closed form distributions, based on the error function . . . 493
4.6.1 !!!Boost: Lévy distribution . . . 494
4.6.2 Boost: Lognormal (Johnson S_L) distribution . . . 497

4.6.3 !!!Boost: Moyal Distribution . . . 501
4.6.4 Boost: Normal (Johnson S_N) distribution . . . 505
4.6.5 Boost: Skew normal Distribution . . . 509
4.6.6 Boost: Wald (or Inverse Gaussian) distribution . . . 513
4.6.7 Birnbaum-Saunders Distribution . . . 516
4.6.8 Exponentially Modified Gaussian (EMG) distribution . . . 520
4.6.9 Folded normal distribution . . . 523
4.6.10 Half-normal distribution . . . 526
4.6.11 Johnson S_B distribution . . . 529
4.6.12 Johnson S_U distribution . . . 532
4.6.13 Normal maximum distribution, $\rho_{ij,i\neq j} = 0$ . . . 535
4.6.14 Normal maximum modulus distribution, $\rho_{ij,i\neq j} = 0$ . . . 538
4.6.15 Sinh-arcsinh normal distribution . . . 541
4.6.16 Truncated normal distribution . . . 544
4.7 Closed form distributions, based on the incomplete gamma function . . . 547
4.7.1 !!!Boost: Chi Distribution . . . 547
4.7.2 Boost: Chi2 distribution . . . 551
4.7.3 Boost: Gamma (Pearson Type III, Erlang) distribution . . . 556
4.7.4 Boost: Inverse chisquared distribution . . . 560
4.7.5 Boost: Inverse Gamma (Pearson Type V) distribution . . . 564
4.7.6 !!!Boost: Maxwell Distribution . . . 568
4.7.7 !!!Boost: Nakagami distribution . . . 572
4.7.8 Amoroso distribution . . . 576
4.7.9 Distribution of the logarithm of a χ^2 random variable . . . 579
4.7.10 Hypoexponential (Generalized Erlang) Distribution . . . 582
4.7.11 Lindley distribution (generalized) . . . 586
4.7.12 Skew exponential power distribution . . . 589
4.7.13 Stacy (generalized gamma) distribution . . . 592
4.8 Closed form distributions, based on the incomplete beta function . . . 595
4.8.1 Boost: Beta (Pearson Type I and II) distribution . . . 595
4.8.2 Boost: Central Fisher F distribution . . . 600
4.8.3 Boost: Student t (Pearson Type VII) distribution . . . 605
4.8.4 Distribution of the negative logarithm of a beta variable . . . 609
4.8.5 Beta-prime (Pearson Type VI) distribution . . . 612
4.8.6 Generalized Beta (Type 1) distribution . . . 615
4.8.7 Generalized Beta (Type 2) distribution . . . 618
4.8.8 Generalized logistic distribution (JKB Types I - IV) . . . 621
4.8.9 Generalized beta-exponential distribution . . . 624
4.8.10 Feller-Pareto distribution . . . 627
4.8.11 Fisher z distribution . . . 630
4.8.12 Skew t-distribution (Jones) . . . 634
4.8.13 Pearson's rho distribution (under H_0) . . . 637
4.9 Noncentral distributions . . . 640
4.9.1 Boost: Noncentral χ^2 distribution . . . 640
4.9.2 Boost: Noncentral Student t distribution . . . 645
4.9.3 Boost: Noncentral Fisher F distribution . . . 649
4.9.4 Boost: Noncentral Beta Type I distribution . . . 654
4.9.5 Noncentral Chi distribution . . . 659
4.9.6 Rice (Nakagami-n) distribution . . . 662
4.9.7 Noncentral distribution of the sample correlation coefficient . . . 665
4.9.8 Distribution of the logarithm of a noncentral Beta Type II variable . . . 669
4.9.9 Noncentral distribution (Type I) of Fisher's R^2 . . . 673
4.9.10 Distribution of the logarithm of a noncentral Fisher $1 - R^2$ variable . . . 678
4.9.11 Doubly non-central Student t distribution . . . 682

4.9.12 Doubly non-central Fisher F distribution . . . 685
4.10 Distributions related to multiple comparisons of means . . . 690
4.10.1 Overview and literature . . . 690
4.10.2 Normal maximum distribution, $\rho_{ij,i\neq j} = \rho$ . . . 691
4.10.3 Normal maximum modulus distribution, $\rho_{ij,i\neq j} = \rho$ . . . 694
4.10.4 Normal maximum distribution, $\rho_{ij,i\neq j} = \lambda_i\lambda_j$ . . . 697
4.10.5 Normal maximum modulus distribution, $\rho_{ij,i\neq j} = \lambda_i\lambda_j$ . . . 700
4.10.6 Normal range distribution . . . 703
4.10.7 Studentized maximum distribution . . . 706
4.10.8 Studentized maximum modulus distribution . . . 709
4.10.9 Distribution of Dunnett's t, one-sided . . . 712
4.10.10 Distribution of Dunnett's t, two-sided . . . 715
4.10.11 Nair's t-distribution . . . 718
4.10.12 Halperin's t-distribution . . . 721
4.10.13 Nelson's h-distribution . . . 724
4.10.14 Studentized range distribution . . . 727
4.11 Distributions related to multivariate statistical analysis . . . 730
4.11.1 Distribution of the sum of the negative logarithms of independent beta variables . . . 730
4.11.2 Distribution of the product of independent beta variables . . . 734
4.11.3 Distribution of Wilks' Λ . . . 739
4.11.4 Distribution of Wilks' L_{vc} . . . 743
4.11.5 Distribution of Wilks' L_{vcm} . . . 747
4.11.6 Distribution of Wilks' test of independence of p variates . . . 751
4.11.7 Distribution of Wilks' test of independence of k groups of variates . . . 755
4.11.8 Distribution of Mauchly's test of sphericity vs general structure . . . 759
4.11.9 Distribution of Box's test of equality of covariance matrices, equal sample sizes . . . 763
4.11.10 Distribution of Box's test of equality of k covariance matrices, unequal sample sizes . . . 767
4.11.11 Distribution of Box's test for same multivariate normal distributions, unequal sample sizes . . . 772
4.11.12 Distribution of the modified likelihood ratio test (LRT) for a given covariance matrix . . . 776
4.11.13 Distribution of the modified likelihood ratio test (LRT) for a given covariance matrix and mean vector . . . 781
4.11.14 Central distribution of Roy's largest root . . . 785
4.11.15 Central distribution of Pillai's V . . . 788
4.11.16 Central distribution of Hotelling's T^2 . . . 791
4.11.17 Noncentral Distribution of Wilks' Λ: MANOVA . . . 794
4.11.18 Noncentral Distribution of Wilks' Λ: Canonical Correlation . . . 798
4.12 Miscellaneous continuous distributions . . . 802
4.12.1 Boost: Kolmogorov-Smirnov distribution (limiting form) . . . 802
4.12.2 Boost: Landau Distribution . . . 807
4.12.3 Boost: Holtsmark distribution . . . 810
4.12.4 Boost: Map-Airy distribution . . . 815
4.12.5 Boost: Saspoint5 distribution . . . 820
4.13 Elementary discrete (lattice) distributions . . . 825
4.13.1 Boost: Bernoulli distribution . . . 825
4.13.2 Boost: Geometric distribution . . . 829
4.13.3 Boost: Poisson distribution . . . 834
4.13.4 Boost: Binomial distribution . . . 839
4.13.5 Boost: Negative binomial distribution . . . 844
4.13.6 Boost: Classical hypergeometric distribution . . . 849
4.14 Discrete (lattice) distributions related to (stratified) rank tests . . . 854
4.14.1 Wilcoxon signed rank T distribution, continuous data . . . 854
4.14.2 Noncentral Wilcoxon signed rank T distribution, Bennett alternatives . . . 859
4.14.3 Mann-Whitney U distribution, continuous data . . . 862
4.14.4 Noncentral Mann-Whitney U distribution, Lehmann alternatives . . . 867
4.14.5 Noncentral Mann-Whitney U distribution, Milton alternatives . . . 870

4.14.6 Kendall's tau distribution, continuous data . . . 873
4.14.7 Jonckheere-Terpsta T distribution, continuous data . . . 878
4.14.8 Generalized Page L distribution, continuous data . . . 883
4.14.9 Noncentral generalized Page L distribution, Milton alternatives . . . 886
4.15 Discrete (non-lattice) distributions related to rank tests . . . 889
4.15.1 Cochran-Friedman-Quade distribution . . . 889
4.15.2 Kruskal-Wallis distribution . . . 892

5 Numerical calculus **895**
5.1 Introduction . . . 895
5.1.1 Delegates, lambda expressions, callback functions: an example . . . 895
5.1.2 Usage in Python . . . 896
5.1.3 Usage in CSharp . . . 896
5.2 DAMath: Numerical Rootfinding and Minimization . . . 898
5.2.1 Quadratic Equation, Real Coefficients . . . 898
5.2.2 Cubic Equation, Real Coefficients . . . 899
5.2.3 Brent's algorithm for finding a local minimum . . . 900
5.2.4 Modified Brent's algorithm for finding a local minimum . . . 903
5.2.5 Rootfinding: Brent/Dekker algorithm . . . 904
5.2.6 Rootfinding: Simplified Brent/Dekker algorithm . . . 905
5.3 Boost/Math: Root Finding and Minimization Algorithms . . . 906
5.3.1 Root Finding Without Derivatives (TOM 748 algorithm) . . . 906
5.3.2 Root Finding With Derivatives: Newton-Raphson . . . 907
5.3.3 Root Finding With Derivatives: Halley . . . 908
5.3.4 Root Finding With Derivatives: Schröder . . . 909
5.3.5 Locating Function Minima using Brent's algorithm . . . 910
5.4 Mpmath: Rootfinding and optimization . . . 911
5.4.1 General root-finding interface . . . 911
5.4.2 Bisection algorithm . . . 911
5.4.3 Secant algorithm . . . 912
5.4.4 Illinois, Pegasus, Anderson algorithms . . . 913
5.4.5 Muller algorithm . . . 914
5.4.6 Ridder algorithm . . . 914
5.4.7 Brent algorithm (to be implemented from Scipy brent) . . . 915
5.4.8 Newton algorithm . . . 915
5.4.9 Newton-Steffenson algorithm (ANewton) . . . 915
5.4.10 Modified Newton algorithm (MNewton) . . . 916
5.4.11 Halley algorithm . . . 917
5.4.12 Roots of a vector function (MDNewton, to be implemented) . . . 917
5.4.13 Levenberg-Marquardt algorithm . . . 918
5.4.14 BFGS algorithm. . . . 918
5.4.15 L-BFGS algorithm. . . . 918
5.4.16 Conjugate gradient. . . . 918
5.5 DAMath: Numerical Quadrature . . . 919
5.5.1 General error codes for Amath integration functions, type 1 . . . 919
5.5.2 General error codes for Amath integration functions, type 2 . . . 919
5.5.3 Global adaptive quadrature by Forsythe, Malcolm, Moler (quanc8) . . . 920
5.5.4 21-point Gauss-Kronrod rule, finite interval (qags) . . . 921
5.5.5 15-point Gauss-Kronrod rule, infinite interval (qagi) . . . 922
5.5.6 Cauchy principal value, finite interval (qawc) . . . 923
5.5.7 Double Exponential (DE) transformation, finite interval (intde) . . . 924
5.5.8 DE transformation, infinite interval, no oscillatory factor (intdei) . . . 925
5.5.9 DE transformation, infinite interval, oscillatory factor (intdeo) . . . 926
5.6 Boost/Math: Numerical integration . . . 927

5.6.1 Trapezoidal Quadrature . . . 927
5.6.2 Gauss-Legendre quadrature . . . 928
5.6.3 Gauss-Kronrod Quadrature . . . 929
5.6.4 Double-exponential quadrature: tanh_sinh . . . 930
5.6.5 Double-exponential quadrature: sinh_sinh . . . 931
5.6.6 Double-exponential quadrature: exp_sinh . . . 932
5.6.7 Fourier Integral, Cosine . . . 933
5.6.8 Fourier Integral, Sine . . . 934
5.6.9 Calculating the pdf from the characteristic function . . . 934
5.6.10 Calculating the cdf from the characteristic function . . . 934
5.7 Mpmath: Numerical integration . . . 937
5.7.1 General quadrature interface . . . 937
5.7.2 Quadrature with subdivision . . . 940
5.7.3 Quadrature of oscillatory functions (Filon) . . . 941
5.7.4 Verified numerical integration (Okayama) . . . 943
5.7.5 Specialized Gauss quadrature rules . . . 945
5.8 Mpmath: Numerical inverse Laplace transform . . . 949
5.8.1 General inverse Laplace transform interface . . . 949
5.8.2 Talbot method . . . 951
5.8.3 Stehfest method . . . 952
5.8.4 de Hoog, Knight, and Stokes method . . . 953
5.8.5 Cohen method . . . 954
5.9 Boost/Odeint: Ordinary differential equations . . . 955
5.9.1 Runge-Kutta 4 method, constant stepper . . . 956
5.9.2 Cash-Karp method, constant stepper . . . 957
5.9.3 Dormand-Prince 5 method, constant stepper . . . 958
5.9.4 Fehlberg 78 method, constant stepper . . . 959
5.9.5 Adams-Bashforth-Moulton, constant stepper . . . 960
5.9.6 Cash-Karp method, adaptive stepper . . . 961
5.9.7 Dormand-Prince 5 method, adaptive stepper . . . 962
5.9.8 Fehlberg 78 method, adaptive stepper . . . 963
5.9.9 Bulirsch-Stoer method, adaptive stepper . . . 964
5.9.10 Dormand-Prince 5 method, dense output stepper . . . 965
5.9.11 Bulirsch-Stoer method, dense output stepper . . . 966
5.10 Mpmath: Numerical differentiation . . . 967
5.10.1 First derivative, using the complex-step derivative approximation . . . 967
5.10.2 Second derivative, using the complex-step derivative approximation . . . 967
5.10.3 Gradient, using the complex-step derivative approximation . . . 967
5.10.4 Jacobi matrix, using the complex-step derivative approximation . . . 967
5.10.5 Nth numerical (partial) derivative, using finite differences or numerical quadrature . . . 968
5.10.6 Function object which evaluates the nth derivative of a given function . . . 970
5.10.7 Forward difference, based on a given sequence . . . 970
5.10.8 Generating a sequence of derivatives . . . 970
5.10.9 Composition of derivatives . . . 971
5.10.10 Composition of exponential of derivatives . . . 971
5.10.11 Fractional derivatives / differintegration . . . 972
5.10.12 Taylor series . . . 973
5.10.13 Solving an ODE using high-order Taylor series . . . 973
5.11 Mpmath: Asymptotic expansions . . . 976
5.11.1 Edgeworth expansion: general approximation of the pdf, cdf and sf . . . 976
5.11.2 Cornish-Fisher expansion: general approximation of the qtf and isf . . . 977
5.11.3 Sheppard correction, cumulants . . . 978
5.11.4 The Sheppard correction, cumulant generating function . . . 978
5.11.5 Luggannini-Rice expansion: general approximation of the pdf, cdf, and sf . . . 979

5.11.6 Jensen expansion: general approximation of the qtf and isf . . . 980
5.11.7 Box-Davis expansion: general approximation of the pdf, cdf and sf . . . 980
5.11.8 Box-Davis expansion: general approximation of the qtf and isf (for $\omega_1 = 0$) . . . 981
5.12 Mpmath: Function approximation . . . 983
5.12.1 Pade approximation . . . 983
5.12.2 Chebyshev approximation . . . 983
5.12.3 Fourier series . . . 984
5.12.4 Fourier series evaluation . . . 985
5.13 Mpmath: Sums, products, limits and extrapolation . . . 986
5.13.1 Summation of infinite series . . . 986
5.13.2 Summation using the Euler-Maclaurin formula . . . 992
5.13.3 Summation using the Abel-Plana formula . . . 993
5.13.4 Products . . . 993
5.13.5 Limits, general . . . 995
5.13.6 Richardson extrapolation . . . 997
5.13.7 Shanks extrapolation . . . 997
5.13.8 Levin extrapolation . . . 999
5.13.9 Cohan alternating extrapolation . . . 1002
5.14 Mpmath: Polynomials . . . 1003
5.14.1 Polynomial evaluation . . . 1004
5.14.2 Polynomial roots . . . 1004
5.15 Eigen/MinPack: non linear optimization . . . 1006
5.15.1 Multidimensional Rootfinding: Powell Hybrid . . . 1006
5.15.2 Nonlinear LeastSquares: Levenberg-Marquardt . . . 1008
5.16 Eigen/CppOptLib: multidimensional optimization . . . 1009
5.16.1 Nelder-Mead Solver . . . 1011
5.16.2 CMAes solver . . . 1013
5.16.3 BFGS Solver . . . 1015
5.16.4 L-BFGS Solver . . . 1017
5.16.5 Gradient descent solver . . . 1019
5.16.6 Conjugate gradient descent solver . . . 1021
5.16.7 Newton descent solver (description needs correction) . . . 1023

6 Eigen: Dense and Sparse Matrices 1025
6.1 Creating scalars and matrices . . . 1025
6.1.1 Creating a matrix, and converting from compatible data types . . . 1025
6.1.2 Creating a matrix of zeros . . . 1025
6.1.3 Creating a matrix of ones . . . 1026
6.1.4 Creating an identity matrix . . . 1026
6.1.5 Creating a general random matrix . . . 1026
6.1.6 Creating a symmetric random matrix . . . 1026
6.1.7 Creating a self-adjoint random matrix . . . 1027
6.1.8 Creating a positive definite self-adjoint matrix . . . 1027
6.1.9 Creating a matrix with linearly increasing values . . . 1027
6.2 Read-only properties: information about a matrix . . . 1028
6.2.1 Rows of a matrix . . . 1028
6.2.2 Columns of a matrix . . . 1028
6.2.3 Size of a matrix . . . 1028
6.3 Accessing and setting parts of a matrix . . . 1029
6.3.1 Getting and setting a matrix coefficient . . . 1029
6.3.2 Getting and setting a block . . . 1029
6.3.3 Getting and setting a matrix row . . . 1030
6.3.4 Getting and setting a matrix column . . . 1030
6.3.5 Getting and setting a diagonal . . . 1031

6.3.6 Getting and setting a triangular view . . . 1032
6.4 Changing the shape of a matrix and/or the order of coefficients . . . 1033
6.4.1 Sorting a whole matrix . . . 1033
6.4.2 Sorting the rows of a matrix by a given column . . . 1033
6.4.3 Resize a matrix . . . 1034
6.4.4 Resize a matrix like another matrix . . . 1034
6.4.5 Conservatively resize a matrix . . . 1035
6.4.6 Convert vector to diagonal matrix . . . 1035
6.4.7 Adjoint of a matrix . . . 1036
6.4.8 Conjugate of a matrix . . . 1036
6.4.9 Transpose of a matrix . . . 1037
6.4.10 Full Reverse of a matrix . . . 1038
6.4.11 Row-wise Reverse of a matrix . . . 1038
6.4.12 Column-wise Reverse of a matrix . . . 1038
6.4.13 Full Replication of a matrix . . . 1039
6.4.14 Row-wise Replication of a matrix . . . 1039
6.4.15 Column-wise Replication of a matrix . . . 1040
6.4.16 Horizontal concatenation of two matrices . . . 1040
6.4.17 Vertical concatenation of two matrices . . . 1041
6.5 Basic arithmetic operations . . . 1042
6.5.1 Matrix deep copy (unary plus) . . . 1042
6.5.2 Matrix negation (unary minus) . . . 1042
6.5.3 General matrix addition . . . 1043
6.5.4 Matrix addition of a vector as diagonal matrix . . . 1043
6.5.5 Matrix: addition of a scalar . . . 1044
6.5.6 General matrix subtraction . . . 1044
6.5.7 Matrix: subtraction of a scalar . . . 1045
6.5.8 General matrix multiplication (“gemm”) . . . 1045
6.5.9 Arithmetic comparisons with a scalar or a matrix . . . 1047
6.6 Descriptive Statistics . . . 1049
6.6.1 Partial Sum . . . 1049
6.6.2 Partial Product . . . 1049
6.6.3 Partial Arithmetic Mean . . . 1049
6.6.4 Partial Minimal Coefficient . . . 1049
6.6.5 Partial Maximal Coefficient . . . 1049
6.6.6 Trace . . . 1049
6.6.7 Partial Squared Norm . . . 1050
6.6.8 Partial Norm . . . 1050
6.6.9 Partial Stable Norm . . . 1050
6.6.10 Covariance matrix . . . 1050
6.6.11 Correlation matrix . . . 1050
6.7 Standard decompositions and linear solving . . . 1051
6.7.1 Cholesky Decomposition with Pivoting . . . 1051
6.7.2 LU Decomposition with partial Pivoting . . . 1057
6.7.3 LU Decomposition with full Pivoting . . . 1062
6.7.4 Cholesky Decomposition without Pivoting . . . 1067
6.7.5 QR Decomposition without Pivoting . . . 1071
6.7.6 QR Decomposition with column Pivoting . . . 1075
6.7.7 QR Decomposition with full Pivoting . . . 1081
6.7.8 Complete orthogonal decomposition (COD) . . . 1087
6.8 Singular Value and Eigen (selfadjoint) decompositions . . . 1094
6.8.1 Singular Value Decomposition, only singular values . . . 1094
6.8.2 Singular Value Decomposition, singular values and thin singular vectors . . . 1097
6.8.3 Singular Value Decomposition, singular values and full singular vectors . . . 1102

6.8.4 Symmetric/Hermitian Eigensystem, only eigen values . . . 1108
6.8.5 Symmetric/Hermitian Eigensystem, eigenvalues and eigenvectors . . . 1111
6.8.6 Generalized Selfadjoint Eigensystem, only eigenvalues . . . 1116
6.8.7 Generalized Selfadjoint Eigensystem: eigenvalues and eigenvectors . . . 1119
6.8.8 Tridiagonalization . . . 1124
6.9 Eigen decompositions of general square matrices . . . 1128
6.9.1 Matrix balancing and eigenvalue/eigenvector computation . . . 1128
6.9.2 Hessenberg Decomposition . . . 1129
6.9.3 Schur Decomposition . . . 1132
6.9.4 Eigensystem of a general square matrix: only eigenvalues . . . 1134
6.9.5 Eigensystem of a general square matrix: eigenvalues and eigenvectors . . . 1137
6.9.6 Real QZ Decomposition . . . 1141
6.9.7 PseudoEigenSystem . . . 1143
6.9.8 Real Generalized Nonsymmetric Eigenvalues . . . 1145
6.9.9 Real Generalized Nonsymmetric Eigensystem . . . 1147
6.10 Eigen: Polynomials . . . 1149
6.10.1 Building a polynomial from its roots . . . 1149
6.10.2 Polynomial evaluation . . . 1149
6.10.3 Polynomial roots . . . 1149
6.11 Eigen: Fast Fourier Transform . . . 1150
6.11.1 Forward transform . . . 1150
6.11.2 Inverse transform . . . 1150
6.12 Eigen and Numpy (Multiprecision): Functions of matrix argument . . . 1153
6.12.1 Matrix Exponential . . . 1153
6.12.2 Matrix Sine . . . 1154
6.12.3 Matrix Cosine . . . 1155
6.12.4 Matrix Hyperbolic Sine . . . 1156
6.12.5 Matrix Hyperbolic Cosine . . . 1157
6.12.6 Matrix Square Root . . . 1159
6.12.7 Matrix Logarithm . . . 1161
6.12.8 Matrix power . . . 1163

7 Numpy: use with multiprecision data types 1164
7.1 Numpy array creation from shape or value . . . 1164
7.1.1 Conversion from integer, float or complex array . . . 1164
7.1.2 Ones on the diagonal and zeros elsewhere: numpy.eye . . . 1167
7.1.3 Identity array: numpy.identity . . . 1167
7.1.4 Array of ones: numpy.ones . . . 1168
7.1.5 Array of ones: numpy.ones_like . . . 1168
7.1.6 Array of zeros: numpy.zeros . . . 1169
7.1.7 Array of zeros: numpy.zeros_like . . . 1169
7.1.8 Array of constant: numpy.full . . . 1170
7.1.9 Array of constant: numpy.full_like . . . 1171
7.1.10 Array with ones at and below the given diagonal and zeros elsewhere: numpy.tri . . . 1172
7.2 Numpy array creation from existing data . . . 1173
7.2.1 Array from object: numpy.array . . . 1173
7.2.2 Array from object: numpy.asarray . . . 1174
7.2.3 Array from object: numpy.asanyarray . . . 1175
7.2.4 Array from data in a text or binary file: numpy.fromfile . . . 1176
7.2.5 Array from a function: numpy.fromfunction . . . 1176
7.2.6 Array from an iterable object: numpy.fromiter . . . 1177
7.2.7 Array from text data in a string: numpy.fromstring . . . 1178
7.2.8 Array from text data in a formatted file: numpy.loadtxt . . . 1179
7.2.9 Array from text data in a text file (can handle missing values): numpy.genfromtxt . . . 1181

7.3 Building special arrays for numerical work . . . 1183
7.3.1 Evenly spaced values within a given interval: numpy.arange . . . 1183
7.3.2 Evenly spaced values within a given interval: numpy.linspace . . . 1184
7.3.3 Evenly spaced values on a log scale: numpy.logspace . . . 1185
7.3.4 Evenly spaced values on a log scale (a geometric progression): numpy.geomspace . . . 1186
7.3.5 Extract a diagonal or construct a diagonal array: numpy.diag . . . 1187
7.3.6 Extract specified diagonals: numpy.diagonal . . . 1189
7.3.7 Two-dimensional array with the flattened input as a diagonal: numpy.diagflat . . . 1190
7.3.8 Lower triangle of an array: numpy.tril . . . 1190
7.3.9 Upper triangle of an array: numpy.triu . . . 1191
7.3.10 Vandermonde matrix.: numpy.vander . . . 1191
7.4 Numpy indexing . . . 1193
7.4.1 Single element indexing . . . 1193
7.4.2 Slicing and striding . . . 1193
7.4.3 Dimensional indexing tools . . . 1195
7.4.4 Broadcasting Overview . . . 1195
7.4.5 General Broadcasting Rules . . . 1196
7.4.6 Broadcastable arrays . . . 1196
7.4.7 Assigning values to indexed arrays . . . 1198
7.5 Numpy basic array manipulation routines . . . 1199
7.5.1 Copy values from one array to another: numpy.copyto . . . 1199
7.5.2 Get the shape of an array: numpy.shape . . . 1199
7.5.3 Reshape an array without changing its data: numpy.reshape . . . 1199
7.5.4 Get a contiguous flattened array: numpy.ravel . . . 1200
7.5.5 1-D iterator over the array: ndarry.flat . . . 1201
7.5.6 Get a copy of the array collapsed into one dimension: ndarry.flatten . . . 1202
7.6 Numpy array manipulation: Transpose-like operations . . . 1203
7.6.1 Move axes of an array to new positions: numpy.flatten . . . 1203
7.6.2 Interchange two axes of an array: numpy.swapaxes . . . 1203
7.6.3 Get an array with axes transposed: numpy.transpose . . . 1203
7.7 Numpy array manipulation: Changing number of dimensions . . . 1205
7.7.1 Convert inputs to arrays with at least one dimension: numpy.atleast_1d . . . 1205
7.7.2 Convert inputs to arrays with at least two dimensions: numpy.atleast_2d . . . 1205
7.7.3 Convert inputs to arrays with at least two dimensions: numpy.atleast_3d . . . 1205
7.7.4 Broadcast an array to a new shape: numpy.broadcast_to . . . 1206
7.7.5 Broadcast any number of arrays against each other: numpy.broadcast_arrays . . . 1206
7.7.6 Expand the shape of an array: numpy.expand_dims . . . 1206
7.7.7 Remove axes of length one from an array: numpy.squeeze . . . 1207
7.8 Numpy array manipulation: Joining arrays . . . 1209
7.8.1 Join a sequence of arrays along an existing axis: numpy.concatenate . . . 1209
7.8.2 Join a sequence of arrays along an existing axis: numpy.stack . . . 1209
7.8.3 Assemble an nd-array from nested lists of blocks: numpy.block . . . 1210
7.8.4 Stack arrays in sequence vertically (row wise): numpy.vstack . . . 1211
7.8.5 Stack arrays in sequence horizontally (column wise): numpy.hstack . . . 1212
7.8.6 Stack arrays in sequence depth wise (along third axis): numpy.dstack . . . 1212
7.8.7 Stack 1-D arrays as columns into a 2-D array: numpy.column_stack . . . 1213
7.9 Numpy array manipulation: Splitting and tiling arrays . . . 1214
7.9.1 Split an array into multiple sub-arrays as views: numpy.split . . . 1214
7.9.2 Split an array into multiple sub-arrays: numpy.array_split . . . 1214
7.9.3 Split array into multiple sub-arrays along the 3rd axis (depth): numpy.dsplit . . . 1214
7.9.4 Split an array into multiple sub-arrays horizontally (column-wise): numpy.hsplit . . . 1215
7.9.5 Split an array into multiple sub-arrays vertically (row-wise): numpy.vsplit . . . 1216
7.9.6 Construct an array by repeating a given array: numpy.tile . . . 1216
7.9.7 Repeat each element of an array after themselves: numpy.repeat . . . 1217

7.10 Numpy array manipulation: Adding and removing elements . . . 1218
7.10.1 Pad an array: numpy.pad . . . 1218
7.10.2 Return a new array with sub-arrays along an axis deleted: numpy.delete . . . 1219
7.10.3 Insert values along the given axis before the given indices: numpy.insert . . . 1219
7.10.4 Append values to the end of an array: numpy.append . . . 1220
7.10.5 Trim zeros from a 1-D array: numpy.trim_zeros . . . 1221
7.10.6 Find the unique elements of an array: numpy.unique . . . 1221
7.11 Numpy array manipulation: Rearranging elements . . . 1223
7.11.1 Reverse the order of elements in an array along the given axis: numpy.flip . . . 1223
7.11.2 Reverse the order of elements along axis 1 (left/right): numpy.fliplr . . . 1223
7.11.3 Reverse the order of elements along axis 0 (up/down): numpy.flipud . . . 1224
7.11.4 Roll array elements along a given axis: numpy.roll . . . 1224
7.11.5 Rotate an array by 90 degrees: numpy.rot90 . . . 1225
7.12 Numpy array manipulation: Sorting . . . 1226
7.12.1 Sorted copy of an array: numpy.sort . . . 1226
7.12.2 Indirect stable sort using a sequence of keys: numpy.lexsort . . . 1227
7.12.3 Indices that would sort an array: numpy.argsort . . . 1228
7.12.4 Matching 1d index and data slices: numpy.take_along_axis . . . 1229
7.12.5 Sorting a complex array: numpy.sort_complex . . . 1229
7.13 Numpy array manipulation: Searching . . . 1230
7.13.1 Indices of the maximum values along an axis: numpy.argmax . . . 1230
7.13.2 Get indices of the minimum values along an axis: numpy.argmin . . . 1230
7.13.3 Find the indices of array elements that are non-zero, grouped by element: numpy.argwhere . . . 1231
7.13.4 Get the indices of array elements that are non-zero: numpy.nonzero . . . 1232
7.13.5 Return elements depending on a condition: numpy.where . . . 1232
7.13.6 Return an array drawn from elements in choicelist, depending on a condition: numpy.select . . . 1233
7.14 Numpy mathematical functions: Sums, products, differences . . . 1234
7.14.1 Product of array elements: numpy.prod . . . 1234
7.14.2 Sum of array elements: numpy.sum . . . 1234
7.14.3 Cumulative product of array elements: numpy.cumprod . . . 1235
7.14.4 Cumulative sum of array elements: numpy.cumsum . . . 1235
7.14.5 N-th discrete difference: numpy.diff . . . 1236
7.14.6 Differences between consecutive elements: numpy.ediff1d . . . 1237
7.14.7 Gradient of an N-dimensional array: numpy.gradient . . . 1237
7.14.8 Trapezoidal rule: numpy.trapezoid . . . 1238
7.15 Numpy mathematical functions: Extrema Finding . . . 1240
7.15.1 Element-wise maximum of array elements: numpy.maximum . . . 1240
7.15.2 Element-wise minimum of array elements: numpy.minimum . . . 1240
7.15.3 Maximum of an array or maximum along an axis: numpy.max . . . 1240
7.15.4 Minimum of an array or maximum along an axis: numpy.min . . . 1241
7.16 Numpy mathematical functions: Arithmetic operations, elementwise . . . 1243
7.16.1 Numerical positive, element-wise: numpy.positive . . . 1243
7.16.2 Numerical negative, element-wise: numpy.negative . . . 1243
7.16.3 Add arguments element-wise: numpy.add . . . 1243
7.16.4 Subtract arguments element-wise: numpy.subtract . . . 1244
7.16.5 Multiply arguments element-wise: numpy.multiply . . . 1244
7.16.6 Divide arguments element-wise: numpy.divide . . . 1244
7.16.7 Floor-divide arguments element-wise: numpy.floor_divide . . . 1245
7.16.8 Element-wise remainder of division: numpy.remainder . . . 1245
7.16.9 Element-wise square: numpy.square . . . 1246
7.16.10 Element-wise reciprocal: numpy.reciprocal . . . 1246
7.17 Numpy mathematical functions: Averages and variances . . . 1247
7.17.1 Median of the array elements.: numpy.median . . . 1247
7.17.2 Average of the array elements.: numpy.average . . . 1247

7.17.3 Arithmetic mean: numpy.mean . . . 1248
7.17.4 Variance: numpy.var . . . 1249
7.18 Numpy mathematical functions: Matrix and vector products . . . 1250
7.18.1 Dot product: numpy.dot . . . 1250
7.18.2 Dot product of two vectors: numpy.vdot . . . 1250
7.18.3 Inner product of two arrays: numpy.inner . . . 1251
7.18.4 Outer product of two vectors: numpy.outer . . . 1252
7.18.5 Matrix product of two arrays: numpy.matmul . . . 1253
7.18.6 Tensor dot product: numpy.matmul . . . 1254
7.18.7 Einstein summation: numpy.einsum . . . 1255
7.18.8 Kronecker product: numpy.kron . . . 1256
7.18.9 Discrete, linear convolution: numpy.convolve . . . 1257
7.19 Numpy logical functions: Truth value testing . . . 1259
7.19.1 Test whether all array elements evaluate to True.: numpy.all, ctx.all . . . 1259
7.19.2 Test whether any array element evaluates to True: numpy.any, ctx.any . . . 1259
7.19.3 Logical AND: numpy.logical_and, ctx.logical_and . . . 1260
7.19.4 Logical OR: numpy.logical_or, ctx.logical_or . . . 1260
7.19.5 Logical XOR: numpy.logical_xor, ctx.logical_xor . . . 1261
7.19.6 Testing array equality: numpy.array_equal, ctx.array_equal . . . 1261
7.19.7 Testing array array_equivalence: numpy.array_equiv, ctx.array_equiv . . . 1262
7.19.8 Truth value of (x1 > x2) element-wise: numpy.greater, ctx.greater . . . 1262
7.19.9 Truth value of (x1 >= x2) element-wise: numpy.greater_equal, ctx.greater_equal . . . 1262
7.19.10 Truth value of (x1 < x2) element-wise: numpy.less, ctx.less . . . 1263
7.19.11 Truth value of (x1 <= x2) element-wise: numpy.less_equal, ctx.less_equal . . . 1263
7.19.12 Truth value of (x1 == x2) element-wise: numpy.equal, ctx.equal . . . 1263
7.19.13 Truth value of (x1 != x2) element-wise: numpy.equal, ctx.equal . . . 1264
7.20 Numpy mathematical functions: Integer and fractional . . . 1265
7.20.1 Floor of the input, element-wise.: numpy.floor, ctx.floor . . . 1265
7.20.2 Ceiling of the input, element-wise.: numpy.ceil, ctx.ceil . . . 1265
7.20.3 Truncated value of the input, element-wise.: numpy.trunc, ctx.trunc . . . 1266
7.20.4 Fix value of the input, element-wise.: numpy.fix, ctx.fix . . . 1266
7.21 Numpy mathematical functions: Miscellaneous . . . 1267
7.21.1 Random Generator . . . 1267
7.21.2 Vectorization of a function: numpy.vectorize . . . 1267
7.22 Summary and examples: Numpy utility functions . . . 1269
7.22.1 Exact mathematical constants . . . 1269
7.22.2 Complex components . . . 1270
7.22.3 Array contents . . . 1274
7.22.4 Array type testing . . . 1279
7.22.5 Using tolerances . . . 1282
7.22.6 Clipping (limiting) the values in an array. . . . 1284
7.23 Arithmetic operations with scalars and iterables . . . 1286
7.23.1 fadd: Addition using a custom precision and rounding mode . . . 1286
7.23.2 fsub: Subtraction using a custom precision and rounding mode . . . 1288
7.23.3 fneg: Negation of a number using a custom precision and rounding mode . . . 1288
7.23.4 fmul: Multiplication using a custom precision and rounding mode . . . 1289
7.23.5 fdiv: Division using a custom precision and rounding mode . . . 1290
7.23.6 fsum: Sum of a finite number of terms . . . 1291
7.23.7 fprod: Product of a finite number of factors . . . 1291
7.23.8 fdot: Dot product . . . 1291
7.24 Numerical transformations and descriptive statistics . . . 1293
7.24.1 Centering of a matrix . . . 1293
7.24.2 Standardization of a matrix . . . 1293
7.24.3 Trace . . . 1294

7.24.4 Squared Norm . . . 1294
7.24.5 Euclidian Norm . . . 1295
7.24.6 Covariance matrix . . . 1295
7.24.7 Correlation matrix . . . 1296
7.24.8 Summary statistic . . . 1296
7.24.9 Vector norm of a matrix . . . 1297
7.24.10 Matrix norm . . . 1298
7.25 Standard decompositions and linear solving . . . 1299
7.25.1 Cholesky decomposition . . . 1299
7.25.2 Cholesky decomposition, solve . . . 1300
7.25.3 Matrix LU factorization . . . 1300
7.25.4 Determinant of a matrix, using LU decomposition . . . 1300
7.25.5 Inverse of a matrix, using the LU factorization . . . 1300
7.25.6 Linear equations: LU solve . . . 1301
7.25.7 Linear equations: residual of LU solve . . . 1301
7.25.8 ??? LU improve solution . . . 1301
7.25.9 mpmath: LU condition number . . . 1301
7.25.10 QR factorization . . . 1302
7.25.11 QR solve . . . 1303
7.26 Singular Value and Eigen decompositions . . . 1304
7.26.1 Real singular value decomposition of a matrix A . . . 1304
7.26.2 Complex singular value decomposition of a matrix A . . . 1305
7.26.3 mpmath: Singular value decomposition of a matrix A (real or complex) . . . 1306
7.26.4 Eigenvalue problem for a real symmetric square matrix A . . . 1307
7.26.5 Eigenvalue problem for a complex hermitian square matrix A . . . 1308
7.26.6 mpmath: Eigenvalue problem for a selfadjoint square matrix A . . . 1309
7.26.7 mpmath: tridiag_sym . . . 1310
7.26.8 mpmath tridiag_her . . . 1311
7.26.9 mpmath: tridiag_eigen_sym . . . 1311
7.26.10 Eigensystem decomposition of a matrix A (real or complex) . . . 1312
7.26.11 Sorting Eigenvalues . . . 1313
7.26.12 mpmath: Hessenberg decomposition of a matrix A (real or complex) . . . 1313
7.26.13 Schur decomposition of a matrix A (real or complex) . . . 1314

II Special Functions 1316

8 Elliptic functions and related 1317
8.1 Carlson symmetric elliptic integrals . . . 1318
8.1.1 Carlson symmetric elliptic integral of the first kind, $R_F(x, y, z)$ . . . 1318
8.1.2 Carlson completely symmetric elliptic integral of the second kind, $R_G(x, y, z)$ . . . 1319
8.1.3 Carlson symmetric elliptic integral of the third kind, $R_J(x, y, z, p)$ . . . 1320
8.1.4 Carlson symmetric elliptic integral of the second kind, $R_D(x, y, z)$ . . . 1322
8.1.5 Carlson degenerate symmetric elliptic integral of the first kind, $R_C(x, y)$ . . . 1323
8.2 Legendre elliptic integrals (elliptic parameter m) . . . 1325
8.2.1 Legendre complete elliptic integral of the first kind, $K(m)$ . . . 1325
8.2.2 Legendre complete elliptic integral of the second kind, $E(m)$ . . . 1326
8.2.3 Legendre complete elliptic integral of the third kind, $\Pi(n, m)$ . . . 1327
8.2.4 Legendre incomplete elliptic integral of the first kind, $F(\phi, m)$ . . . 1329
8.2.5 Legendre incomplete elliptic integral of the second kind, $E(\phi, m)$ . . . 1330
8.2.6 Legendre incomplete elliptic integral of the third kind, $\Pi(n, \phi, m)$ . . . 1331
8.3 Legendre elliptic integrals (elliptic modulus k), and related functions . . . 1333
8.3.1 Legendre complete elliptic integral of the first kind, $K(k)$ . . . 1333
8.3.2 Legendre complete elliptic integral of the second kind, $E(k)$ . . . 1334

8.3.3 Legendre complete elliptic integral of the third kind, $\Pi(n;k)$ . . . 1336
8.3.4 Legendre incomplete elliptic integral of the first kind, $F(\phi,k)$ . . . 1338
8.3.5 Legendre incomplete elliptic integral of the second kind, $E(\phi,k)$ . . . 1339
8.3.6 Legendre incomplete elliptic integral of the third kind, $\Pi(n,\phi,k)$ . . . 1340
8.4 Jacobi elliptic functions . . . 1343
8.4.1 Jacobi elliptic function $\mathrm{sn}(x,k)$ . . . 1343
8.4.2 Jacobi elliptic function $\mathrm{cn}(x,k)$ . . . 1345
8.4.3 Jacobi elliptic function $\mathrm{dn}(x,k)$ . . . 1347
8.4.4 Jacobi elliptic function $\mathrm{nc}(x,k)$ . . . 1349
8.4.5 Jacobi elliptic function $\mathrm{sc}(x,k)$ . . . 1351
8.4.6 Jacobi elliptic function $\mathrm{dc}(x,k)$ . . . 1353
8.4.7 Jacobi elliptic function $\mathrm{nd}(x,k)$ . . . 1355
8.4.8 Jacobi elliptic function $\mathrm{sd}(x,k)$ . . . 1357
8.4.9 Jacobi elliptic function $\mathrm{cd}(x,k)$ . . . 1359
8.4.10 Jacobi elliptic function $\mathrm{ns}(x,k)$ . . . 1361
8.4.11 Jacobi elliptic function $\mathrm{cs}(x,k)$ . . . 1363
8.4.12 Jacobi elliptic function $\mathrm{ds}(x,k)$ . . . 1365
8.5 Jacobi theta functions and related functions . . . 1367
8.5.1 Jacobi theta function $\theta_1(z,q)$ . . . 1367
8.5.2 Jacobi theta function $\theta_2(z,q)$ . . . 1369
8.5.3 Jacobi theta function $\theta_3(z,q)$ . . . 1371
8.5.4 Jacobi theta function $\theta_4(z,q)$ . . . 1373
8.6 Weierstrass elliptic functions, in terms of elliptic period ratio τ . . . 1375
8.6.1 Weierstrass function $\wp(z|\tau)$ . . . 1375
8.6.2 Weierstrass function, first derivative: $\wp' z|\tau)$ . . . 1376
8.6.3 Inverse Weierstrass function $\wp^{-1}(z|\tau)$ . . . 1377
8.6.4 Weierstrass Zeta function $\zeta(z,\tau)$ . . . 1378
8.6.5 Weierstrass Sigma function $\sigma(z|\tau)$ . . . 1379
8.7 Modular forms, in terms of half-period ω_1 and elliptic period ratio τ . . . 1381
8.7.1 Dedekind eta function $\eta(\tau)$ . . . 1381
8.7.2 Elliptic modular lambda function $\lambda(\tau)$ (also DAMath) . . . 1382
8.7.3 Elliptic modular delta function $\Delta(\omega,\tau)$ . . . 1383
8.7.4 Klein j-invariant $j(\tau)$ (also DAMath) . . . 1384

9 Lerch's phi and related **1386**
9.1 Lerch's transcendent and Lerch's zeta . . . 1387
9.1.1 Lerch's transcendent, $\Phi(x,s,a)$ . . . 1387
9.1.2 Lerch's zeta . . . 1390
9.2 Polygamma and related functions . . . 1392
9.2.1 Polygamma function, $\psi^{(n)}(x)$ . . . 1392
9.2.2 TriGamma function, $\psi'(x)$ . . . 1394
9.2.3 DiGamma function $\psi(x)$ . . . 1396
9.2.4 Harmonic number function, H_x . . . 1398
9.3 Polylogarithm and related functions . . . 1400
9.3.1 Polylogarithm, $\mathrm{Li}_s(z)$ . . . 1400
9.3.2 Trilogarithm Function, $\mathrm{Li}_3(z)$ . . . 1402
9.3.3 Dilogarithm Function, $\mathrm{Li}_2(z)$ . . . 1404
9.3.4 Generalized Clausen sine function . . . 1406
9.3.5 Generalized Clausen cosine function . . . 1408
9.3.6 Classical Clausen function, $\mathrm{Cl}_2(x)$ . . . 1410
9.3.7 Bose-Einstein integrals, $G_s(x)$ . . . 1412
9.3.8 Fermi-Dirac integrals, $F_s(x)$ . . . 1414
9.3.9 Legendre's Chi function, $\chi_s(x)$ . . . 1416
9.3.10 Generalized inverse tangent integral . . . 1418

9.4 Hurwitz zeta and related functions . . . 1420
9.4.1 Hurwitz zeta function, $\zeta(s, a)$ . . . 1420
9.4.2 Generalized harmonic number function, $H_x^{(r)}$ . . . 1423
9.4.3 Bernoulli numbers, B_n . . . 1425
9.4.4 Bernoulli polynomials, $B_n(x)$ . . . 1426
9.4.5 Euler numbers . . . 1428
9.4.6 Euler polynomials, $E_n(x)$ . . . 1429
9.4.7 Barnes G-function . . . 1431
9.4.8 Logarithm of Barnes G function . . . 1433
9.4.9 Hyperfactorial . . . 1435
9.4.10 Superfactorial . . . 1437
9.5 Riemann zeta function, and related functions . . . 1439
9.5.1 Riemann zeta function, $\zeta(s)$ . . . 1439
9.5.2 Riemann $\zeta(s) - 1$ . . . 1441
9.5.3 Hardy (or Riemann-Siegel) theta function . . . 1443
9.5.4 Hardy (or Riemann-Siegel) Z function . . . 1445
9.5.5 Riemann (Landau) function $\xi(s)$ . . . 1447
9.5.6 Dirichlet eta function, $\eta(s)$ . . . 1449
9.5.7 Dirichlet $\eta(s) - 1$ . . . 1451
9.5.8 Dirichlet beta function, $\beta(s)$ . . . 1453
9.5.9 Dirichlet lambda function, $\lambda(s)$ . . . 1455
9.5.10 Zeros of the Riemann zeta function . . . 1457

10 Hypergeometric function ${}_0F_1$ and related **1458**
10.1 Hypergeometric Limit Function ${}_0F_1$ . . . 1458
10.1.1 Confluent Hypergeometric Limit Function ${}_0F_1(b, x)$ . . . 1458
10.1.2 Regularized Confluent Hypergeometric Limit Function ${}_0\widetilde{F}_1(b; x)$ . . . 1460
10.2 Bessel functions . . . 1461
10.2.1 Bessel function of the 1st kind, $J_\nu(x)$ . . . 1461
10.2.2 Bessel function of the 2nd kind, $Y_\nu(x)$ . . . 1463
10.2.3 First derivative of the Bessel function of the first kind, $J'_\nu(x)$ . . . 1465
10.2.4 First derivative of the Bessel function of the second kind, $Y'_\nu(x)$ . . . 1466
10.2.5 Boost: Zeros $j_{\nu,m}$ of the Bessel function of the first kind: $J_\nu(j_{\nu,m}) = 0$ . . . 1467
10.2.6 Boost: Zeros $y_{\nu,m}$ of the Bessel function of the first kind: $Y_\nu(y_{\nu,m}) = 0$ . . . 1468
10.3 Modified Bessel functions . . . 1469
10.3.1 Modified Bessel function of the 1st kind, $I_\nu(x)$ . . . 1469
10.3.2 Modified Bessel function of the 2nd kind, $K_\nu(x)$ . . . 1471
10.3.3 First derivative of the modified Bessel function of the first kind $I'_\nu(x)$ . . . 1473
10.3.4 First derivative of the modified Bessel function of the second kind $K'_\nu(x)$ . . . 1474
10.3.5 Marcum Q function, $Q_m(a, b)$ (up to octuple precision) . . . 1475
10.4 Spherical Bessel functions . . . 1476
10.4.1 Spherical Bessel function of the first kind, $j_n(x)$ . . . 1476
10.4.2 Spherical Bessel function of the second kind, $y_n(x)$ . . . 1477
10.4.3 First derivative of the spherical Bessel function of the first kind, $j'_n(x)$ . . . 1478
10.4.4 First derivative of the spherical Bessel function of the second kind, $y'_n(x)$ . . . 1479
10.4.5 Boost: Zeros $a_{n,m}$ of the spherical Bessel function of the first kind: $j_n(a_{n,m}) = 0$ . . . 1480
10.4.6 Boost: Zeros $b_{n,m}$ of the spherical Bessel function of the second kind: $y_n(b_{n,m}) = 0$ . . . 1481
10.5 Modified spherical Bessel functions . . . 1482
10.5.1 Modified spherical Bessel function of the first kind, $i_n(x)$ . . . 1482
10.5.2 Modified Spherical Bessel function of the second kind, $k_n(x)$ . . . 1484
10.5.3 First derivative of the modified spherical Bessel function of the first kind, $i'_n(x)$ . . . 1485
10.5.4 First derivative of the modified spherical Bessel function of the second kind, $k'_n(x)$ . . . 1486
10.5.5 Bessel polynomials $y_n(x)$ . . . 1487
10.5.6 Reverse Bessel polynomials $\theta_n(x)$ . . . 1488

10.6 Hankel functions . . . 1489
10.6.1 Hankel function of the first kind $H_\nu^{(1)}(x)$ . . . 1489
10.6.2 Hankel function of the second kind $H_\nu^{(2)}(x)$ . . . 1490
10.6.3 Spherical Hankel function of the first kind, $h_\nu^{(1)}(x)$ . . . 1491
10.6.4 Spherical Hankel function of the second kind, $h_\nu^{(2)}(x)$ . . . 1492
10.7 Airy functions . . . 1493
10.7.1 Airy function $\mathrm{Ai}(x)$ . . . 1493
10.7.2 Airy function $\mathrm{Bi}(x)$ . . . 1495
10.7.3 First derivative of the Airy function Ai, $\mathrm{Ai}'(x)$ . . . 1497
10.7.4 First derivative of the Airy function Bi, $\mathrm{Bi}'(x)$ . . . 1498
10.7.5 Real zeros a_k of the Airy function Ai, $\mathrm{Ai}(a_k) = 0$ . . . 1499
10.7.6 Real zeros b_k of the Airy function Bi, $\mathrm{Bi}(b_k) = 0$ . . . 1500
10.8 Kelvin functions . . . 1501
10.8.1 Kelvin function $\mathrm{ber}(\nu, x)$ . . . 1501
10.8.2 Kelvin function $\mathrm{bei}(\nu, x)$ . . . 1502
10.8.3 Kelvin function $\mathrm{ker}(\nu, x)$ . . . 1503
10.8.4 Kelvin function $\mathrm{kei}(\nu, x)$ . . . 1504
10.8.5 First derivative of the Kelvin function $\mathrm{ber}(\nu, x)$, $\mathrm{ber}'(\nu, x)$ . . . 1505
10.8.6 First derivative of the Kelvin function $\mathrm{bei}(\nu, x)$, $\mathrm{bei}'(\nu, x)$ . . . 1506
10.8.7 First derivative of the Kelvin function $\mathrm{ker}(\nu, x)$, $\mathrm{ker}'(\nu, x)$ . . . 1507
10.8.8 First derivative of the Kelvin function $\mathrm{kei}(\nu, x)$, $\mathrm{kei}'(\nu, x)$ . . . 1508

11 Hypergeometric function ${}_1F_1$ and related **1509**
11.1 Hypergeometric Functions ${}_1F_1$ (Kummer) and U (Tricomi) . . . 1509
11.1.1 Kummer's Confluent Hypergeometric Function ${}_1F_1(a, b; x)$ . . . 1509
11.1.2 Regularized Kummer Confluent Hypergeometric Function, ${}_1\widetilde{F}_1(a, b; x)$ . . . 1511
11.1.3 Tricomi's Confluent Hypergeometric Function, $U(a, b; x)$ . . . 1512
11.1.4 Generalized Laguerre polynomials, $L_n^{(a)}(x)$ . . . 1514
11.1.5 Hermite polynomial (physicist), $H_n(x)$ . . . 1515
11.1.6 Hermite polynomials (probabilist) $\mathrm{He}_n(x)$ . . . 1516
11.2 Incomplete gamma functions . . . 1517
11.2.1 Lower normalized incomplete gamma function, $P(a, x)$ . . . 1517
11.2.2 Upper normalized incomplete gamma functions , $Q(a, x)$ . . . 1518
11.2.3 Lower non-normalized incomplete gamma function, $\gamma(a, x)$ . . . 1520
11.2.4 Upper non-normalized incomplete gamma function, $\Gamma(a, x)$ . . . 1521
11.2.5 Derivative of the incomplete gamma function . . . 1522
11.2.6 Inverse of the real lower normalised incomplete gamma function, $P^{-1}(a, q)$ . . . 1522
11.2.7 Inverse of the real upper normalised incomplete gamma function, $Q^{-1}(a, q)$ . . . 1523
11.2.8 Inverse (on parameter a) of the real lower normalised incomplete gamma function . . . 1523
11.2.9 Inverse (on parameter a) of the real upper normalised incomplete gamma function . . . 1523
11.3 Coulomb, Whittaker and parabolic cylinder function . . . 1525
11.3.1 Regular Coulomb wave function $F_\ell(\eta, x)$ . . . 1525
11.3.2 Irregular Coulomb wave function $G_\ell(\eta, z)$ . . . 1526
11.3.3 Irregular Coulomb wave function $H_\ell^{(+)}(\eta, x)$ . . . 1527
11.3.4 Irregular Coulomb wave function $H_\ell^{(-)}(\eta, x)$ . . . 1528
11.3.5 Whittaker function $M_{\kappa,\mu}(x)$ . . . 1529
11.3.6 Whittaker function $W_{\kappa,\mu}(x)$ . . . 1530
11.3.7 Parabolic cylinder function $D_\nu(x)$ . . . 1531
11.3.8 Parabolic cylinder function $U(a, x)$ . . . 1532
11.3.9 Parabolic cylinder function $V(a, x)$ . . . 1533
11.3.10 Parabolic cylinder function $W(a, x)$ . . . 1534
11.4 Error function and related functions . . . 1535
11.4.1 Error function, $\mathrm{erf}(x)$ . . . 1535

11.4.2 Complementary error function, $\operatorname{erfc}(x)$ . . . 1537
11.4.3 Inverse of the real error function, $\operatorname{erf}^{-1}(x)$ . . . 1539
11.4.4 Inverse of the real complementory error function, $\operatorname{erfc}^{-1}(x)$ . . . 1540
11.4.5 Standard normal density function $\phi(x)$ . . . 1541
11.4.6 Standard normal cumulative distribution function $\Phi(x)$ . . . 1542
11.4.7 Standard normal quantile function $\Phi^{-1}(q)$ . . . 1542
11.4.8 Imaginary error function, $\operatorname{erfi}(x)$ . . . 1543
11.4.9 Dawson integral, $F(x)$ . . . 1544
11.4.10 Faddeeva function, $w(z)$ . . . 1545
11.4.11 Fresnel sine integral, $S(x)$ . . . 1546
11.4.12 Fresnel cosine integral, $C(x)$ . . . 1548
11.4.13 Owen's T function, $T(h, a)$ . . . 1550
11.5 Exponential integrals, and related functions . . . 1551
11.5.1 Exponential integral $E_1(x)$ . . . 1551
11.5.2 Exponential integral $\operatorname{Ei}(x)$ . . . 1552
11.5.3 Logarithmic integral $\operatorname{li}(x)$ . . . 1554
11.5.4 Hyperbolic sine integral $\operatorname{Shi}(x)$ . . . 1556
11.5.5 Hyperbolic cosine integral $\operatorname{Chi}(x)$ . . . 1557
11.5.6 Generalized exponential integral $E_n(x)$ . . . 1558
11.5.7 Sine integral $\operatorname{Si}(x)$ . . . 1559
11.5.8 Cosine integral $\operatorname{Ci}(x)$ . . . 1561

12 Hypergeometric functions ${}_2F_1$ and ${}_1F_2$ (and related functions) 1563
12.1 Gauss Hypergeometric Function ${}_2F_1$ . . . 1563
12.1.1 Gauss Hypergeometric Function, ${}_2F_1(a, b; c; x)$ . . . 1563
12.1.2 Regularized Hypergeometric Function, ${}_2\widetilde{F}_1(a, b; c; x)$ . . . 1565
12.2 Chebyshev, Gegenbauer and Jacobi polynomials . . . 1566
12.2.1 Chebyshev polynomial (or function) of the first kind, $T_n(x)$ . . . 1566
12.2.2 Chebyshev polynomial of the second kind, $U_n(x)$ . . . 1567
12.2.3 Chebyshev polynomials of the third kind, $V_n(x)$ . . . 1568
12.2.4 Chebyshev polynomials of the fourth kind, $W_n(x)$ . . . 1569
12.2.5 Gegenbauer (ultraspherical) polynomial, $C_n^{\alpha}(x)$ . . . 1570
12.2.6 Jacobi polynomials, $P_n^{(a,b)}(x)$ . . . 1571
12.2.7 Zernike radial polynomials $R_n^m(r)$ . . . 1573
12.3 Legendre polynomials and related . . . 1574
12.3.1 Legendre polynomial (or function) of the first kind, $P_n(x)$ . . . 1574
12.3.2 Associated Legendre function of the first kind, $P_l^m(x)$ . . . 1575
12.3.3 Legendre function of the second kind, $Q_l(x)$ . . . 1576
12.3.4 Associated Legendre function of the second kind, $Q_l^m(x)$ . . . 1577
12.3.5 Spherical harmonics, $Y_n^m(\theta, \phi)$ . . . 1578
12.3.6 Toroidal harmonics $P^m_{l-1/2}(x)$ . . . 1578
12.3.7 Toroidal harmonics $Q^m_{l-1/2}(x)$ . . . 1579
12.4 Incomplete beta functions . . . 1580
12.4.1 Non-normalized lower incomplete beta function, $B_{\text{lower}}(a, b; x)$ . . . 1580
12.4.2 Normalized incomplete beta function, $I_x(a, b)$ . . . 1581
12.4.3 Derivative of the incomplete beta function . . . 1583
12.4.4 Real non-normalized upper incomplete beta function, $B_{\text{upper}}(a, b; x)$ . . . 1584
12.4.5 Real normalized complementory incomplete beta function, $I_{1-x}(a, b)$ . . . 1585
12.4.6 Inverse of the real normalised incomplete beta function . . . 1587
12.4.7 Inverse of the real normalised complementary incomplete beta function . . . 1588
12.4.8 Inverse (on parameter a) of the real normalised incomplete beta function . . . 1589
12.4.9 Inverse (on parameter a) of the real normalised complementary incomplete beta function . . . 1590
12.4.10 Inverse (on parameter b) of the real normalised incomplete beta function . . . 1591
12.4.11 Inverse (on parameter b) of the real normalised complementary incomplete beta function . . . 1592

12.5 Hypergeometric function ${}_1F_2$ . . . 1593
12.5.1 Non-regularized hypergeometric function ${}_1F_2$ . . . 1593
12.5.2 Regularized hypergeometric function ${}_1\widetilde{F}_2$ . . . 1594
12.6 Scorer functions . . . 1595
12.6.1 Scorer function $\mathrm{Gi}(x)$ . . . 1595
12.6.2 Scorer function $\mathrm{Hi}(x)$ . . . 1596
12.6.3 First derivative of the Scorer function $\mathrm{Gi}(x)$, $\mathrm{Gi}'(x)$ . . . 1597
12.6.4 First derivative of the Scorer function $\mathrm{Hi}(x)$, $\mathrm{Hi}'(x)$ . . . 1598
12.7 Struve functions . . . 1599
12.7.1 Struve function $\mathbf{H}_n(x)$ . . . 1599
12.7.2 Struve function $\mathbf{L}_\nu(x)$ . . . 1600
12.7.3 Struve function $\mathbf{K}_\nu(x)$ . . . 1601
12.7.4 Struve function $\mathbf{M}_\nu(x)$ . . . 1602
12.8 Anger, Weber and Lommel functions . . . 1603
12.8.1 Anger function $\mathbf{J}_\nu(x)$ . . . 1603
12.8.2 Weber function $\mathbf{E}_\nu(x)$ . . . 1604
12.8.3 Lommel function $s_{\mu,\nu}(x) = s^{(1)}_{\mu,\nu}(x)$ . . . 1605
12.8.4 Lommel function $S_{\mu,\nu}(x) = s^{(2)}_{\mu,\nu}(x)$ . . . 1606

III Supporting Functions 1607

13 Algebra with random variables 1608
13.1 Probability density function (pdf) . . . 1608
13.1.1 Calculating the pdf from the cdf . . . 1608
13.1.2 Calculating the pdf from the characteristic function . . . 1608
13.2 Probability mass function (pmf) . . . 1609
13.2.1 Calculating the pmf from the cdf . . . 1609
13.2.2 Calculating the pmf from the characteristic function . . . 1609
13.2.3 Calculating the pmf from the factorial moments . . . 1609
13.2.4 Approximating the pmf with asymptotic expansions . . . 1609
13.3 Cumulative distribution function (cdf) . . . 1610
13.3.1 Calculating the cdf from the pdf . . . 1610
13.3.2 Calculating the cdf from the pmf . . . 1610
13.3.3 Calculating the cdf from the characteristic function . . . 1610
13.3.4 Calculating the cdf and sf from the characteristic function (lattice distribution) . . . 1612
13.3.5 Calculating the cdf from the factorial moments (lattice distributions) . . . 1612
13.4 Quantile function . . . 1613
13.4.1 Calculating the quantile function from the cdf . . . 1613
13.4.2 Approximating the quantile function from the cumulant generating function . . . 1613
13.4.3 Approximating the quantile function from the cumulants . . . 1613
13.5 Characteristic function . . . 1614
13.5.1 Calculating the characteristic function from the pdf (continuous distribution) . . . 1614
13.5.2 Calculating the characteristic function from the pmf (lattice distribution) . . . 1614
13.5.3 Calculating the characteristic function from the quantile function . . . 1614
13.5.4 Calculating the characteristic function from the raw moments . . . 1614
13.6 Moment generating function . . . 1615
13.6.1 Calculating the moment-generating function from the pdf . . . 1615
13.6.2 Calculating the moment-generating function from the characteristic function . . . 1615
13.6.3 Calculating the moment-generating function from the cumulant-generating function . . . 1615
13.6.4 Calculating the moment-generating function from the probability-generating function . . . 1615
13.6.5 Calculating the moment-generating function from the raw moments . . . 1615
13.7 Cumulant generating function . . . 1616
13.7.1 Calculating the cumulant-generating function from the characteristic function . . . 1616

13.7.2 Calculating the cumulant-generating function from the moment-generating function . . . 1616
13.7.3 Calculating the cumulant-generating function from the probability-generating function . . . 1616
13.7.4 Calculating the cumulant-generating function from the cumulants . . . 1616
13.8 Probability generating function . . . 1617
13.8.1 Calculating the probability-generating function from the pmf vector . . . 1617
13.8.2 Calculating the probability-generating function from the moment-generating function . . . 1617
13.9 Factorial Moments . . . 1618
13.9.1 Calculating the factorial moments from the raw moments . . . 1618
13.9.2 Calculating the factorial moments from the cumulants . . . 1618
13.10 Raw Moments . . . 1619
13.10.1 Calculating the raw moments from the pdf . . . 1619
13.10.2 Calculating the raw moments from the pmf . . . 1619
13.10.3 Calculating the raw moments from the factorial moments . . . 1619
13.10.4 Calculating the raw moments from the central moments . . . 1619
13.10.5 Calculating the raw moments from the cumulants . . . 1620
13.10.6 Calculating the raw moments from the moment-generating function . . . 1620
13.10.7 Calculating the raw moments from the characteristic function . . . 1620
13.10.8 Calculating the raw moments from the probability-generating function . . . 1620
13.11 Central Moments . . . 1621
13.11.1 Calculating the central moments from the factorial moments . . . 1621
13.11.2 Calculating the central moments from the raw moments . . . 1621
13.11.3 Calculating the central moments from the cumulants . . . 1621
13.12 Cumulants . . . 1622
13.12.1 Calculating the cumulants from the pmf vector . . . 1622
13.12.2 Calculating the cumulants from the factorial moments . . . 1622
13.12.3 Calculating the cumulants from the raw moments . . . 1622
13.12.4 Calculating the cumulants from the central moments . . . 1622
13.12.5 Calculating the cumulants from the cumulant-generating function . . . 1622

14 Series and integrals **1624**
14.1 Finite series algorithms for selected distributions . . . 1624
14.1.1 Central χ^2 distribution, cdf (integer degrees of freedom) . . . 1624
14.1.2 Central Student t distribution, cdf (integer degrees of freedom) . . . 1624
14.1.3 Central Fisher F distribution, cdf (integer degrees of freedom) . . . 1625
14.1.4 Central Beta distribution, cdf ($2a$ an integer, $2b$ an integer) . . . 1626
14.1.5 Noncentral χ^2 distribution, cdf (integer degrees of freedom) . . . 1626
14.1.6 Noncentral Student t distribution, cdf (integer degrees of freedom) . . . 1627
14.1.7 Noncentral Fisher F distribution, cdf (m an even integer) . . . 1627
14.1.8 Noncentral Beta distribution, cdf (b an integer) . . . 1628
14.1.9 Pearson's ρ distribution, pdf (integer N) . . . 1628
14.1.10 Pearson's ρ distribution, cdf (integer N) . . . 1629
14.1.11 Fisher's R^2 distribution, cdf (finite sum for $N - p$ even) . . . 1630
14.1.12 Roy's largest root distribution, pdf, cdf and sf . . . 1631
14.2 Infinite series algorithms for selected functions and distributions . . . 1633
14.2.1 Incomplete gamma function, continued fractions (Peizer) . . . 1633
14.2.2 Incomplete gamma function, asymptotic expansion (Paris) . . . 1634
14.2.3 Incomplete beta function, continued fractions (Peizer) . . . 1634
14.2.4 Noncentral χ^2 distribution, pdf, cdf and sf (Boost) . . . 1635
14.2.5 Noncentral Student t distribution, pdf, cdf and sf (Boost) . . . 1636
14.2.6 Noncentral Beta distribution, pdf, cdf and sf (Boost) . . . 1637
14.2.7 Noncentral F distribution, pdf, cdf and sf (Benton) . . . 1637
14.2.8 Pearson's ρ distribution, cdf and sf (Hotelling's series) . . . 1638
14.2.9 Pearson's ρ distribution, cdf and sf (Guenther's series) . . . 1639
14.2.10 Fisher's R^2 distribution, cdf and sf (Boost, Benton) . . . 1640

14.3 Finite series for lattice distributions, based on factorial moments . . . 1641
14.3.1 Fréchet's formula for calculating the pmf from the factorial moments . . . 1641
14.3.2 Laurent's formula for calculating the cdf from the factorial moments . . . 1641
14.3.3 Binomial distribution, pmf, cdf . . . 1642
14.3.4 Classical hypergeometric distribution, pmf, cdf . . . 1642
14.3.5 Wilcoxon distribution, pmf, cdf . . . 1643
14.3.6 Mann-Whitney distribution, pmf, cdf . . . 1644
14.3.7 Kendall distribution, pmf, cdf . . . 1645
14.3.8 Jonckheere-Terpsta T distribution, pmf, cdf . . . 1645
14.4 Efficient integration of bell-shaped functions . . . 1647
14.4.1 Introduction . . . 1647
14.4.2 Error function . . . 1647
14.4.3 Lower non-normalised incomplete gamma function, $\gamma(a, x)$ (Continued fractions) . . . 1647
14.4.4 Real upper non-normalised incomplete gamma function, $\Gamma(a, x)$ (Quadrature) . . . 1647
14.4.5 Normalised incomplete beta function, $I_x(a, b)$ . . . 1648
14.4.6 Non-central chi-square cdf and sf (Chow) . . . 1648
14.4.7 Marcum Q function . . . 1648
14.4.8 Owen's T function . . . 1649
14.5 Verified numerical integration . . . 1651
14.5.1 Error function . . . 1651
14.5.2 Lower non-normalised incomplete gamma function, $\gamma(a, x)$ (Continued fractions) . . . 1651
14.5.3 Real upper non-normalised incomplete gamma function, $\Gamma(a, x)$ (Quadrature) . . . 1651
14.5.4 Normalised incomplete beta function, $I_x(a, b)$ . . . 1651
14.5.5 Non-central chi-square cdf and sf (Chow) . . . 1652
14.5.6 Marcum Q function . . . 1652
14.5.7 Owen's T function . . . 1653

15 Pmf vectors **1655**
15.1 Basic discrete (lattice) distribution functions . . . 1655
15.1.1 Poisson distribution, pmf vector . . . 1655
15.1.2 Binomial distribution, pmf vector . . . 1655
15.1.3 Negative binomial distribution, pmf vector . . . 1656
15.1.4 Hypergeometric distribution, pmf vector . . . 1656
15.1.5 Noncentral hypergeometric distribution (Fisher), pmf vector . . . 1656
15.2 Discrete (lattice) distribution functions related to (stratified) rank tests . . . 1658
15.2.1 Sign test distribution (under H_0), pmf vector . . . 1658
15.2.2 Wilcoxon T distribution (under H_0), pmf vector . . . 1658
15.2.3 Wilcoxon T distribution (under Bennett alternatives), pmf vector . . . 1658
15.2.4 Kendall S (or tau) distribution (under H_0), pmf vector . . . 1658
15.2.5 Mann-Whitney U distribution (under H_0), pmf vector . . . 1659
15.2.6 Jonckheere-Terpsta S distribution (under H_0), pmf vector . . . 1659
15.2.7 Spearman ρ distribution (under H_0), pmf vector . . . 1659
15.2.8 Page L distribution (under H_0), pmf vector . . . 1660
15.2.9 Quade L distribution (under H_0), pmf vector . . . 1660
15.2.10 Mann-Whitney U distribution (under Lehmann alternatives), pmf vector . . . 1660
15.2.11 Mann-Whitney U distribution (under Milton alternatives), pmf vector . . . 1661
15.3 Discrete (non-lattice) distribution functions related to rank tests . . . 1662
15.3.1 Cochran S distribution (under H_0), pmf vector . . . 1662
15.3.2 Friedman S distribution (under H_0), pmf vector . . . 1662
15.3.3 Quade S distribution (under H_0), pmf vector . . . 1662
15.3.4 Kruskal-Wallis H distribution (under H_0), pmf vector . . . 1663

16 Fast approximations **1664**
16.1 Approximations based on the normal distribution . . . 1664

16.1.1 Non-central chi-squared distribution: cdf and sf (Penev) 1664
16.1.2 (Non-central) chi-squared distribution: qtf and isf (Canal) 1664
16.1.3 Gamma distribution: qtf and isf (Canal) 1665
16.1.4 F distribution: qtf and isf (Davis) 1666
16.1.5 Beta distribution: qtf and isf (Davis) 1666
16.1.6 Pearson's rho distribution: pdf (Winterbottom) 1667
16.1.7 Pearson's rho distribution: cdf and sf (Winterbottom) 1667
16.1.8 Pearson's rho distribution: qtf and isf (Winterbottom) 1667
16.1.9 Pearson's rho distribution: confidence limit for ρ (Winterbottom) 1668
16.1.10 Singly noncentral t: pdf (Broda) 1669
16.1.11 Singly noncentral t: cdf, sf (Broda) 1669
16.1.12 Singly noncentral t: qtf, isf (Harley) 1670
16.1.13 Singly noncentral t: confidence limit for δ (Akahira) 1670
16.1.14 Doubly noncentral t: cdf, sf (Broda) 1671
16.1.15 Doubly noncentral t: qtf, isf (Broda) 1672
16.1.16 Spearman's rho, first 8 cumulants (David) 1672
16.1.17 Mann-Whitney U distribution: general alternatives specified by rank order probabilities (Sundrum) 1673
16.1.18 First 4 moments of Kendalls τ in the general case (Sundrum) 1675
16.2 Approximations based on the chi-squared distribution 1677
16.2.1 Non-Central chi-squared : cdf, sf (Patnaik) 1677
16.2.2 Non-Central chi-squared: qtf, isf (Patnaik) 1677
16.2.3 Non-Central chi-squared: confidence limit for λ (Winterbottom) 1677
16.2.4 Roy's largest root θ: pdf (Chiani) 1678
16.2.5 Roy's largest root: cdf and sf (Chiani) 1679
16.2.6 Roy's largest root: qtf and isf (Chiani) 1680
16.3 Approximations based on the central t, F or beta distribution 1681
16.3.1 Dunn-Šidák percentage points 1681
16.3.2 Singly non-central Fisher F distribution: cdf, sf (Patnaik) 1681
16.3.3 Singly non-central F distribution: qtf, isf (Patnaik) 1682
16.3.4 Singly non-central F: confidence interval for the noncentrality parameter λ 1682
16.3.5 Doubly non-central F distribution: cdf, sf (Patnaik) 1682
16.3.6 Doubly non-central F distribution: qtf, isf (Patnaik) 1683
16.3.7 Multiple correlation coefficient: cdf, sf (Lee and Gurland) 1684
16.3.8 Multiple correlation coefficient: qtf, isf (Lee and Gurland) 1684
16.3.9 Fisher R^2,: confidence limit for ρ^2 1684
16.3.10 Central Wilks' Lambda: cdf, sf (Rao) 1686
16.3.11 Central Wilks' Lambda: qtf, isf (Rao) 1686
16.3.12 Central Hotelling's T^2: cdf, sf (Pillai and Young) 1687
16.3.13 Central Hotelling's T^2: qtf, isf (Pillai and Young) 1687
16.3.14 Central Pillai's V: cdf, sf (Ginzberg) 1688
16.3.15 Central Pillai's V: qtf, isf (Ginzberg) 1688
16.3.16 Product of independent beta variables: cdf, sf (Nagarsenker) 1689
16.3.17 Product of independent beta variables: qtf, isf (Nagarsenker) 1689
16.4 Approximations based on the noncentral chi-squared distribution 1691
16.4.1 Non-central Wilks' Lambda (GLM): cdf and sf (Fujikoshi) 1691
16.4.2 Non-central Wilks' Lambda (independence): cdf and sf (Lee) 1693
16.4.3 Non-central Pillai's V (GLM): cdf and sf Fujikoshi 1694
16.4.4 Non-central Pillai's V (independence): cdf and sf (Lee) 1695
16.4.5 Non-central Hotelling T^2 (GLM): cdf and sf (Fujikoshi) 1696
16.4.6 Non-central Hotelling T^2 (independence): cdf and sf (Lee) 1697
16.5 Approximations based on the noncentral F or beta distribution 1699
16.5.1 Multiple correlation coefficient (Lee and Gurland) 1699
16.5.2 Noncentral Wilks' Lambda under the GLM alternative 1699
16.5.3 Noncentral Wilks' Lambda under the independence alternative 1699

16.5.4 Noncentral Hotelling's T under the GLM alternative . . . 1700
16.5.5 Noncentral Hotelling's T under the independence alternative . . . 1700
16.5.6 Noncentral Pillai's V under the GLM alternative . . . 1701
16.5.7 Noncentral Pillai's V under the independence alternative . . . 1701
16.5.8 Noncentral Roy's largest root under the GLM alternative . . . 1701
16.5.9 Noncentral Roy's largest root under the independence alternative . . . 1702
16.6 Approximations based on hypergeometric functions of scalar argument . . . 1703
16.6.1 Hypergeometric function ${}_1F_1$ for matrix argument (Butler's approximation) . . . 1703
16.6.2 Comparisons with MATLAB: some results . . . 1703
16.6.3 Hypergeometric function ${}_2F_1$ for matrix argument (Butler's approximation) . . . 1704
16.6.4 Comparison with MATLAB: some results . . . 1704

IV Gallery of Plots 1705

17 Visualisation of datasets 1706
17.1 Bar Charts . . . 1707
17.1.1 Bar chart, part 1 . . . 1707
17.1.2 Bar chart, part 2 . . . 1708
17.1.3 Stacked Bar Plot . . . 1709
17.1.4 Grouped Bar Plot . . . 1710
17.1.5 Grouped StackedBar Plot . . . 1711
17.1.6 Barplot with error bar . . . 1712
17.1.7 Waterfall Plot . . . 1713
17.1.8 Mirror Histogram . . . 1714
17.1.9 Horizontal Bar . . . 1715
17.1.10 Horizontal Error Bar . . . 1716
17.1.11 Stacked horizontal bar with labels . . . 1717
17.1.12 Stacked and grouped horizontal bar . . . 1718
17.1.13 Gantt Chart . . . 1719
17.1.14 Marketing Funnel . . . 1720
17.1.15 Population Pyramid . . . 1721
17.1.16 Mirror Bar Plot (horizontal) . . . 1722
17.1.17 Tornado Chart . . . 1723
17.1.18 Circular Barplot . . . 1724
17.1.19 Barplot with color . . . 1725
17.2 Line and lollipop charts . . . 1726
17.2.1 Line chart (Seaborn) . . . 1726
17.2.2 Slope Chart . . . 1727
17.2.3 Line chart with error Bar . . . 1728
17.2.4 Confidence band (RandomWalk) . . . 1729
17.2.5 Plotting Parallel (Pandas) . . . 1730
17.2.6 Andrew Curves (Pandas) . . . 1731
17.2.7 Highlighted LinePlot . . . 1732
17.2.8 Multiple Lines And Panels . . . 1733
17.2.9 Line chart with fancy formatting . . . 1734
17.2.10 Lolllipop 2 Groups . . . 1735
17.2.11 Highlight Group In Lollipop . . . 1736
17.2.12 Lolllipop Conditional Color . . . 1737
17.2.13 Lollipop chart with fancy formatting . . . 1738
17.2.14 Circular Lolllipop . . . 1739
17.3 Area Plots . . . 1741
17.3.1 Percentage Stacked Area Chart . . . 1741
17.3.2 StackedAreaChart1 . . . 1742

17.3.3 Steam graph . . . 1744
17.3.4 Area Chart . . . 1745
17.3.5 Density Chart . . . 1746
17.3.6 Ridgetline Plot . . . 1747
17.3.7 Kde Plot, 3 versions . . . 1748
17.4 Boxplot, Violinplot and Raincloud plot . . . 1751
17.4.1 Boxplot, simple . . . 1751
17.4.2 Boxplot, multiple groups . . . 1752
17.4.3 ViolinPlot . . . 1753
17.4.4 Boxplot vs violinplot . . . 1754
17.4.5 Boxenplot . . . 1755
17.4.6 Swarmplot . . . 1756
17.4.7 Stripplot . . . 1757
17.4.8 Catplot . . . 1758
17.4.9 Raincloud Plot . . . 1759
17.5 Correlation and regression . . . 1760
17.5.1 Linear regression with confidence Band . . . 1760
17.5.2 Anscombe example . . . 1761
17.5.3 Faceted Scatter Plots: all in one plot . . . 1762
17.5.4 Faceted Scatter Plots: separate plots . . . 1763
17.5.5 Faceted Scatter Plots: further subgrouping . . . 1764
17.5.6 Bubbleplot . . . 1765
17.5.7 Scatterplot with fancy formatting . . . 1766
17.5.8 Scatterplots with positive, negative and weak correlation: confidence ellipses . . . 1767
17.5.9 Scatterplot with confidence confidence ellipses at different standard deviations . . . 1768
17.5.10 Hexagonal binned plot and marginal histograms (Seaborn) . . . 1769
17.5.11 Joint and marginal Kde (Seaborn) . . . 1770
17.5.12 Marginal ticks . . . 1771
17.5.13 Regression_marginals (Seaborn) . . . 1772
17.5.14 Pair grid with kde (Seaborn) . . . 1773
17.5.15 Scatterplot matrix (Seaborn) . . . 1774
17.6 Financial plots (requires mplfinance) . . . 1775
17.6.1 HiLoPlot . . . 1775
17.6.2 CandlePlot . . . 1776
17.6.3 LinePlot . . . 1777
17.6.4 RenkoPlot . . . 1778
17.6.5 PnfPlot . . . 1779
17.6.6 OhlcMav4Plot . . . 1780
17.6.7 CandleMav369Plot . . . 1781
17.6.8 CandleMav369VolPlot . . . 1782
17.6.9 CandleMav369VolNonTradPlot . . . 1783
17.7 Geographic data (requires cartopy) . . . 1784
17.7.1 Antarctis . . . 1784
17.7.2 Australia . . . 1785
17.7.3 Africa . . . 1786
17.7.4 World Flight . . . 1787
17.7.5 World Night Shading . . . 1788
17.7.6 World2projections . . . 1789
17.7.7 Country population estimates . . . 1790
17.7.8 Arctis and Antarctis . . . 1791
17.7.9 Geographic Mapping, with longitude and altitude on 4 axes crs=ccrs.PlateCarree . . . 1792
17.7.10 Geographic Mapping, World, projection=ccrs.InterruptedGoodeHomolosine . . . 1793
17.7.11 Geographic Mapping, World, projection=ccrs.PlateCarree . . . 1794
17.7.12 Labelling projection axes: PlateCarree and Mercator . . . 1795

17.8 Geographic data (requires geopandas) . . . 1796
17.8.1 World Happiness Report 2019 . . . 1796
17.8.2 World Happiness Report 2019: Europe . . . 1797
17.8.3 US state populations . . . 1798
17.8.4 California . . . 1799
17.8.5 Berlin, Esda . . . 1800
17.8.6 New York, Collisions . . . 1801
17.8.7 New York, Tickets . . . 1802
17.8.8 New York, Factors . . . 1803
17.8.9 Europe CO2 Emissions . . . 1804
17.8.10 US, Salary . . . 1805
17.8.11 Belgium, unemployment . . . 1806
17.8.12 Earthquakes . . . 1807
17.9 Parts of a whole . . . 1808
17.9.1 Waffle Chart . . . 1808
17.9.2 Pie Chart . . . 1809
17.9.3 Donut Chart . . . 1810
17.9.4 Radar Chart . . . 1811
17.9.5 Venn Diagram . . . 1812
17.9.6 Treemap . . . 1813
17.10 Dendrograms, heatmaps and clustermaps . . . 1814
17.10.1 Dendrogram . . . 1814
17.10.2 Heatmap, simple . . . 1817
17.10.3 Heatmap, complex . . . 1818
17.10.4 Matshow . . . 1819
17.10.5 Many pairwise correlations (Seaborn) . . . 1820
17.10.6 Structured heatmap (Seaborn) . . . 1821
17.10.7 Clustermap (Seaborn) . . . 1822
17.11 PlotTable . . . 1823
17.11.1 PlotTable1 . . . 1823
17.11.2 PlotTable2 . . . 1824
17.11.3 PlotTable3 . . . 1825
17.11.4 PlotTable4 . . . 1826
17.11.5 PlotTable5 . . . 1827
17.12 Flow and connections . . . 1828
17.12.1 Sankey Default . . . 1828
17.12.2 Sankey 2 Systems . . . 1829
17.12.3 Sankey Rankine . . . 1830
17.12.4 Sankey One 2 one . . . 1831
17.12.5 Sankey Flow . . . 1832
17.12.6 Arcplot . . . 1833
17.12.7 Funnel Chart . . . 1834
17.13 Circular plots and flows . . . 1835
17.13.1 Circular track plotting . . . 1835
17.13.2 Circular heatmap . . . 1836
17.13.3 Chord diagram (matrix 3x6) . . . 1837
17.13.4 Chord diagram (matrix10x10) . . . 1838
17.13.5 Chord diagram (from-to table) . . . 1839
17.13.6 Circos plot: genom of a phage . . . 1840
17.13.7 Circos plot: genom of homo sapiens . . . 1841
17.13.8 Circos plot: chromosome links . . . 1842
17.13.9 Philogenetic tree: bars . . . 1843
17.13.10 Philogenetic tree: heatmap . . . 1844
17.14 Network data (requires networkx) . . . 1845

17.14.1 Multipartite_Layout . . . 1845
17.14.2 Rainbow_Coloring . . . 1846
17.14.3 Random_Geometry . . . 1847
17.14.4 Travelling_Salesman . . . 1848
17.14.5 NapoleonRussianCampaign . . . 1849
17.14.6 Community Visualisation . . . 1850
17.14.7 Connected Components . . . 1851

18 Visualisation of functions and curves (2D) 1852
18.1 Introduction to 2D functions plots . . . 1852
18.1.1 Simple plot of (well-behaved) functions in 2D . . . 1852
18.1.2 Function plots on different scales . . . 1853
18.1.3 Stepplot . . . 1854
18.1.4 Stemplot . . . 1855
18.1.5 Histograms and densities . . . 1856
18.1.6 Cumulative histogram and CDF . . . 1857
18.1.7 Plots of continuous distribution functions . . . 1858
18.1.8 Plots of discrete distribution functions . . . 1865
18.1.9 Mpmath-inspired functions plots in 2D . . . 1872
18.2 Basic curves . . . 1878
18.2.1 Regular convex polygon . . . 1878
18.2.2 Circle . . . 1879
18.2.3 Ellipse . . . 1880
18.2.4 Parabola . . . 1881
18.2.5 Hyperbola . . . 1882
18.2.6 Cycloid . . . 1883
18.2.7 Trochoid . . . 1884
18.2.8 Cardioid . . . 1885
18.2.9 Limaçon curve . . . 1886
18.2.10 Conchoid of de Sluze . . . 1887
18.2.11 Freeth's Nephroid . . . 1888
18.2.12 Strophoid . . . 1889
18.2.13 Cycloid of Ceva . . . 1890
18.2.14 Lemniscate of Gerono . . . 1891
18.2.15 Lemniscate of Bernoulli . . . 1892
18.3 Spirals . . . 1893
18.3.1 Archimedes' spiral . . . 1893
18.3.2 Fermat's spiral . . . 1894
18.3.3 Hyperbolic Spiral . . . 1895
18.3.4 Lituus . . . 1896
18.3.5 Logarithmic Spiral . . . 1897
18.3.6 Poinsot's Spiral . . . 1898
18.3.7 Cotes's spiral . . . 1899
18.3.8 Tanh Spiral . . . 1900
18.3.9 Nielsens Spiral . . . 1901
18.3.10 Cornu Spiral . . . 1902
18.4 Decorative curves . . . 1903
18.4.1 Fish curve . . . 1903
18.4.2 Heart curve . . . 1904
18.4.3 Chrysanthemum curve . . . 1905
18.4.4 Butterfly curve . . . 1906
18.5 General curve families . . . 1907
18.5.1 Regular star polygon . . . 1907
18.5.2 Regular compound polygon (polygram) . . . 1908

18.5.3 Epicycloid . . . 1909
18.5.4 Hypocycloid . . . 1910
18.5.5 Epitrochoid . . . 1911
18.5.6 Hypotrochoid . . . 1912
18.5.7 Rose curve . . . 1913
18.5.8 Lissajous curves . . . 1914
18.5.9 Superellipses (Lamé curves) . . . 1915
18.5.10 Epispirals . . . 1916
18.5.11 Nodal curves (stereographic projections of the clelia) . . . 1917
18.5.12 Cyclic-harmonic curves . . . 1918
18.5.13 Rational circular cubics . . . 1919
18.6 Field lines . . . 1920
18.6.1 Colored electric field lines: 1 positive vs 1 negative charge . . . 1920
18.6.2 Colored electric field lines: 3 positive vs 1 negative charge(s) . . . 1921
18.6.3 Colored electric field lines: 3 positive vs 1 positive charge(s) . . . 1922
18.6.4 Colored electric field lines: 3 positive and 2 negative vs 1 positive charge(s) . . . 1923
18.7 Contours . . . 1924
18.7.1 Open Contourplot . . . 1924
18.7.2 Filled Contourplot . . . 1925
18.7.3 Electric dipole: field lines and open contours . . . 1926
18.7.4 Electric quadrupole: field lines and open contours . . . 1927
18.7.5 Electric dipoles: field lines and filled contours . . . 1928
18.7.6 Electric quadrupole: field lines and filled contours . . . 1929
18.7.7 Orthogonal electric dipoles: field lines and filled contours . . . 1930
18.7.8 Electric field lines around a point charge with grounded sphere . . . 1931
18.8 Complex functions rendered as contours . . . 1932
18.8.1 Complex square function . . . 1932
18.8.2 Complex sqrt function . . . 1933
18.8.3 Complex exp function . . . 1934
18.8.4 Complex log function . . . 1935
18.8.5 Complex sine function . . . 1936
18.8.6 Complex asin function . . . 1937
18.8.7 Complex tan function . . . 1938
18.8.8 Complex atan function . . . 1939
18.9 Streams, barbs and quivers (some require cartopy) . . . 1940
18.9.1 Streams, Electric Dipole: vector field . . . 1940
18.9.2 Streams, Electric Quadrupole: vector field . . . 1941
18.9.3 Streams, Electric Octopole: vector field . . . 1942
18.9.4 Streams, Electric Hexapole: vector field . . . 1943
18.9.5 Streams, North Atlantic Ocean and Europe (requires cartopy) . . . 1944
18.9.6 Quivers, North Atlantic Ocean and Europe (requires cartopy) . . . 1945
18.9.7 Quivers, plain and regridded (requires cartopy) . . . 1946
18.9.8 Barbs, North Atlantic Ocean and Europe (requires cartopy) . . . 1947

19 Bitmaps **1948**
19.1 Fractals: introduction . . . 1948
19.1.1 Barnsley's Fern . . . 1949
19.1.2 Dragon curve . . . 1950
19.1.3 Sierpiński carpet . . . 1951
19.2 Fractals related to the Mandelbrot set . . . 1952
19.2.1 Mandelbrot set, example 1, classical set: $z_{n+1} = z_n^2 + c$ . . . 1952
19.2.2 Mandelbrot set, example 2: higher powers . . . 1953
19.2.3 Mandelbrot set, example 3: $z_{n+1} = z_n^5 + \frac{c}{z_n}$ . . . 1954
19.2.4 Mandelbrot set, example 4: $z_{n+1} = z_n^5 + \frac{c}{z_n^5}$ . . . 1955

19.2.5 Mandelbrot set, example 5, “Inverse Mandelbrot” . . . 1956
19.2.6 Mandelbrot set, example 6, “Marek Dragon Fractal”: . . . 1957
19.2.7 Mandelbrot set, example 7, “Burning Ship Fractal” . . . 1958
19.3 Fractals related to the Julia set . . . 1959
19.3.1 Julia sets, example 1: Classical set . . . 1959
19.3.2 Julia sets, example 2: Glynn fractals . . . 1960
19.3.3 Julia sets, example 3: Spiral Septagon fractal . . . 1961
19.3.4 Julia sets, example 4: Reuleaux Triangle fractal . . . 1962
19.3.5 Julia sets, example 5: Phoenix Julia fractals . . . 1963
19.3.6 Julia sets, example 6: Cubic Julia fractals . . . 1964
19.3.7 Julia sets, example 7: Spiral Julia fractal (uses $z_{n+1} = \tan(z_n^2 + c)$) . . . 1965
19.3.8 Julia sets, example 8: Julia set of $\sin(z)$ . . . 1966
19.3.9 Julia sets, example 9: Julia09 fractals . . . 1967
19.3.10 Julia sets, example 10: Julia10 fractals . . . 1968
19.3.11 Julia sets, example 11: Julia11 fractals . . . 1969
19.4 Newton Fractals . . . 1970
19.4.1 Newton, zeros of $z^3 - 1$ . . . 1970
19.4.2 Newton, zeros of $\cos(z)$ . . . 1971
19.4.3 Modified Newton (containing an error), zeros of $z^3 - 1$ . . . 1972
19.4.4 Modified Newton (containing an error), not converging . . . 1973
19.4.5 Halley, zeros of $z^3 - 1$ . . . 1974
19.4.6 Halley, zeros of $\cos(z)$ . . . 1975
19.4.7 Modified Halley (containing an error), zeros of $z^3 - 1$ . . . 1976
19.5 Domain coloring . . . 1977
19.5.1 Domain coloring without contours: $f(z) = (z^3 - 1)/z$ . . . 1978
19.5.2 Domain coloring with contours of the phase: $f(z) = (z^3 - 1)/z$ . . . 1979
19.5.3 Domain coloring with contours of the modulus: $f(z) = (z^3 - 1)/z$ . . . 1980
19.5.4 Domain coloring with contours of phase and modulus: $f(z) = (z^3 - 1)/z$ . . . 1981
19.5.5 Domain coloring with contours of phase and modulus: $f(z) = z^5 + z$ . . . 1982
19.5.6 Domain coloring with contours of phase and modulus: $f(z) = (z^6 - 1)/(z^{12} + 1)$ . . . 1983
19.5.7 Domain coloring with contours of phase and modulus: $f(z) = (z - 0.5(1 + i))/z^2$ . . . 1984
19.5.8 Domain coloring with contours of phase and modulus: $f(z) = \exp(1/z)$ . . . 1985
19.5.9 Domain coloring with contours of phase and modulus: $f(z) = z\exp(1/z)$ . . . 1986
19.5.10 Domain coloring with contours of phase and modulus: $f(z) = \exp(1/z^2)$ . . . 1987
19.5.11 Domain coloring with contours of phase and modulus: $f(z) = \sin(z)$ . . . 1988
19.5.12 Domain coloring with contours of phase and modulus: $f(z) = z\sin(1/z)$ . . . 1989
19.5.13 Domain coloring with contours of phase and modulus: $f(z) = \sin(z)/(z - i)^2$ . . . 1990
19.5.14 Domain coloring with contours of phase and modulus: $f(z) = \tan(z)$ . . . 1991

20 Matplotlib 3D Graphics **1992**
20.1 Introduction . . . 1992
20.1.1 Overview . . . 1992
20.2 Matplotlib: 3D Graphics (from Matplotlib tutorials) . . . 1993
20.2.1 Klein bottle . . . 1993
20.2.2 Lorentz attractor . . . 1994
20.2.3 Parametric curve . . . 1995
20.2.4 Projected filled contour . . . 1996
20.2.5 Projected open contour . . . 1997
20.2.6 Scatterplot . . . 1998
20.2.7 Surface colormap . . . 1999
20.2.8 Surface hillshading . . . 2000
20.2.9 Surface solid . . . 2001
20.2.10 Surface triangular . . . 2002
20.3 S3dlib: Basic geometric figures . . . 2003

20.3.1 Base 3D class surface . . . 2003
20.3.2 Hypercube . . . 2004
20.3.3 Surface elements . . . 2005
20.3.4 Hyperboloid 3D . . . 2006
20.3.5 Conic sections . . . 2007
20.3.6 Base 3D class surface, part 2 . . . 2008
20.3.7 Rhombicuboctahedron . . . 2009
20.3.8 Rhombicuboctahedron, bubbles . . . 2010
20.4 S3dlib: Real functions . . . 2011
20.4.1 Surface plot of a real function, basic example . . . 2011
20.4.2 Surface plot of a real function, grid . . . 2012
20.4.3 Surface plot of a real function, peaks example . . . 2013
20.4.4 Function plots: Ackley, Himmelblau, Rosenbrock, Rastrigin . . . 2014
20.4.5 McCormick function . . . 2015
20.4.6 Surface plot combined with contour . . . 2016
20.4.7 Sliced polar surface . . . 2017
20.5 S3dlib: Parametric Surfaces . . . 2018
20.5.1 Color representation vs geometric representation, part 1 . . . 2018
20.5.2 Color representation vs geometric representation, part 2 . . . 2019
20.5.3 Color maps: Möbius function example . . . 2020
20.5.4 Shading: Möbius function example . . . 2021
20.5.5 Color maps: Boy, Dini, Bour, Roman, Klein, and Figure8 examples . . . 2022
20.5.6 Colored knot in 3D . . . 2023
20.5.7 Multiple geometric maps . . . 2024
20.5.8 Example from Mayavi . . . 2025
20.5.9 S3Dlib Logo . . . 2026
20.5.10 Spherical harmonics, 3D representation . . . 2027
20.5.11 Boy surface . . . 2028
20.5.12 Dini surface . . . 2029
20.5.13 Bour surface . . . 2030
20.5.14 Roman surface . . . 2031
20.5.15 Klein bottle . . . 2032
20.5.16 Klein bottle8 . . . 2033
20.6 S3dlib: Image mapping and clipping . . . 2034
20.6.1 Image HSV value clipping . . . 2034
20.6.2 Spherical image mapping . . . 2035
20.6.3 Earth in 3D . . . 2036
20.6.4 Cylindrical image mapping . . . 2037
20.6.5 Imaginary Earth, part A . . . 2038
20.6.6 Imaginary Earth, part B . . . 2039
20.6.7 Earth, projected on Klein bottle . . . 2040
20.6.8 Earth, projected on planar, screw, knot and swirl surfaces . . . 2041
20.7 S3dlib: Edge-to-edge surface coloring . . . 2042
20.7.1 Platonic solid, with surface edges filled, part 1 . . . 2042
20.7.2 Platonic solid, with surface edges filled, part 2 . . . 2043
20.7.3 Spherical contour surface, filled . . . 2044
20.7.4 Edge-to-edge surface, part 1 . . . 2045
20.7.5 Spherical edge surface, filled . . . 2046
20.7.6 Edge-to-edge surface, part 2 . . . 2047
20.7.7 Line colormap sequence . . . 2048
20.7.8 Sequential line color, part 1 . . . 2049
20.7.9 Sequential line color, part 2 . . . 2050
20.8 S3dlib: Decorative parametric surfaces . . . 2051
20.8.1 Shell surface with colormap . . . 2051

20.8.2 Escher Knot . . . 2052
20.8.3 Escher sphere spirals . . . 2053
20.8.4 Escher spirals . . . 2054
20.9 S3dlib: Geometric and color datagrid mapping (requires scipy) . . . 2055
20.9.1 Mandelbrot contours . . . 2055
20.9.2 Geometric and color datagrid mapping . . . 2056
20.9.3 MRI 3D . . . 2057
20.9.4 Jacksboro fault . . . 2058
20.9.5 Mandelbrot 3D . . . 2059
20.9.6 MRI regions . . . 2060
20.10 S3dlib: Implicit surfaces (requires scikit-image) . . . 2061
20.10.1 Sphere (implicit definition), part 1 . . . 2061
20.10.2 Sphere (implicit definition), part 2 . . . 2062
20.10.3 Goursat surface . . . 2063
20.10.4 Schwarz P surface . . . 2064
20.10.5 Nodal surface . . . 2065
20.10.6 Spirals surface . . . 2066
20.10.7 Iso surface . . . 2067
20.10.8 Implicit surface . . . 2068

21 Plotly **2069**
21.1 General surface plots in 3D . . . 2069
21.1.1 Mount Bruno . . . 2069
21.1.2 Ring Cyclide . . . 2070
21.1.3 Torus . . . 2071
21.1.4 Möbius surface . . . 2072
21.1.5 Boy surface . . . 2073
21.1.6 Overlaid function . . . 2074
21.1.7 Iris data . . . 2075
21.2 Geographical plots . . . 2076
21.2.1 Movable projection of the world . . . 2076
21.2.2 Rotatable globe . . . 2077
21.2.3 Choropleth of the US with Alaska and Hawai . . . 2078
21.2.4 Voting results embedded in map . . . 2079
21.3 Sankey plots . . . 2080
21.3.1 Sankey plot 1 . . . 2080
21.3.2 Sankey plot 2 . . . 2081
21.3.3 Sankey plot 3 . . . 2082

V Interactive 3D Wpf Plots **2083**

22 Wpf: Altitude surfaces in 3D, real and complex functions **2084**
22.1 Special techniques for height surfaces, real and complex functions . . . 2084
22.1.1 Wpf figures as standard display of complex functions . . . 2084
22.1.2 Truncation vs loglog transformation . . . 2085
22.1.3 Displaying branch cuts . . . 2085
22.2 Scatterplots and building 3D scenes . . . 2086
22.2.1 Scatter plot of bivariate normal . . . 2086
22.2.2 Scatter plot of surfaces . . . 2087
22.3 Height plots of general bivariate real functions . . . 2088
22.3.1 Hyperbolic paraboloid . . . 2088
22.3.2 Array Surface, general . . . 2089
22.3.3 Fractal Landscape surface . . . 2090

22.3.4 Sombrero function . . . 2091
22.3.5 General 3D Wave function . . . 2092
22.3.6 Bivariate normal function . . . 2092

23 Wpf: Parametric surfaces **2093**
23.1 Surfaces of translation . . . 2093
23.1.1 Fermat spiral as generator . . . 2093
23.1.2 Lemniscate as generator . . . 2094
23.1.3 Tanh spiral as generator . . . 2095
23.1.4 Rose curve as generator . . . 2096
23.1.5 Hypocycloid as generator . . . 2097
23.1.6 Epicycloid as generator . . . 2098
23.2 Surfaces of revolution . . . 2099
23.2.1 One-Sheeted Hyperboloid . . . 2099
23.2.2 Sphere . . . 2100
23.2.3 Prolate Spheroid . . . 2101
23.2.4 Oblate Spheroid . . . 2102
23.2.5 Drop surface . . . 2103
23.2.6 Egg surface . . . 2104
23.2.7 Apple surface . . . 2105
23.2.8 Spinning top . . . 2106
23.2.9 Pseudosphere . . . 2107
23.2.10 Wave sphere Surface . . . 2108
23.2.11 Torus . . . 2109
23.2.12 Horn Torus . . . 2110
23.2.13 Spindle Torus . . . 2111
23.2.14 Elliptic Torus . . . 2112
23.3 Generalisations of common surfaces . . . 2113
23.3.1 Ellipsoid . . . 2113
23.3.2 Superellipsoid . . . 2114
23.3.3 Hexaedron . . . 2115
23.3.4 Super Toroid . . . 2116
23.3.5 Elliptic Helicoid . . . 2117
23.3.6 Hyperbolic Helicoid . . . 2118
23.3.7 Lemniscate . . . 2119
23.3.8 Bohemian Dome . . . 2120
23.3.9 Dupin1 surface . . . 2121
23.3.10 Dupin2 surface . . . 2122
23.3.11 Dinis Surface (twisted pseudosphere) . . . 2123
23.3.12 Plueckers conoid . . . 2124
23.3.13 Umbilic Torus . . . 2125
23.3.14 Skidian's ruled surface . . . 2126
23.3.15 Umbrella surface . . . 2127
23.3.16 Cyclic surfaces (generalized torus) . . . 2128
23.3.17 Goursat surfaces . . . 2130
23.3.18 Cyclides triples . . . 2132
23.3.19 Ship Lamé . . . 2134
23.4 Minimal surfaces . . . 2135
23.4.1 Catenoid . . . 2135
23.4.2 Helicoid . . . 2136
23.4.3 Bours minimal surface . . . 2137
23.4.4 Catalan minimal surface . . . 2138
23.4.5 Ennepers first minimal surface . . . 2139
23.4.6 Enneper second minimal surface . . . 2140

23.4.7 Hennebergs minimal surface . . . 2141
23.4.8 Scherk's first minimal surface . . . 2142
23.4.9 Scherk's second minimal surface . . . 2143
23.4.10 Richmond minimal surface . . . 2144
23.4.11 Generalized Ennneper surfaces . . . 2145
23.5 Nonorientable (one-sided) Surfaces . . . 2146
23.5.1 Moebius Strip . . . 2146
23.5.2 Cross-Cap Surface . . . 2147
23.5.3 Pseudo Cross-Cap Surface . . . 2148
23.5.4 Roman Surface (or Steiner Surface) . . . 2149
23.5.5 Klein bagel . . . 2150
23.5.6 Klein bottle . . . 2151
23.5.7 3D Boy Surface, version 1 . . . 2152
23.5.8 3D Boy Surface, version 2 . . . 2153
23.5.9 Morin Surface . . . 2154
23.6 Decorative parametric surfaces . . . 2155
23.6.1 Bourke Seashell . . . 2155
23.6.2 Seashell (mathworld.wolfram) . . . 2156
23.6.3 3D Apple . . . 2157
23.6.4 Bow curve . . . 2158
23.6.5 Fish Surface . . . 2159
23.6.6 Bourke Horn . . . 2160
23.6.7 Hexa torus . . . 2161
23.6.8 3D Breather Surface . . . 2162
23.6.9 Kuen surface . . . 2163
23.6.10 Tranguloid trefoil . . . 2164
23.6.11 Triaxial teardrop . . . 2165
23.6.12 Gray Bottle . . . 2166
23.6.13 Surfaces mimicking snail shells . . . 2167

24 Wpf: Path surfaces in 3D 2170
24.1 Introduction to path surfaces . . . 2170
24.1.1 Borromean rings, A, B, C . . . 2170
24.1.2 Ellipses, A, B, C . . . 2172
24.1.3 Trefoil 2 . . . 2173
24.1.4 Formatting options for path surfaces, Trefoil 5 . . . 2174
24.2 Functions with real input and complex results . . . 2175
24.2.1 Expj (Cis) function . . . 2175
24.2.2 Hankel function of the first kind $H_{1,\nu}(x)$ . . . 2177
24.2.3 Hankel function of the second kind $H_{2,\nu}(x)$ . . . 2178
24.2.4 Kelvin functions ber and bei . . . 2179
24.2.5 Kelvin functions ker and kei . . . 2180
24.3 Characteristic functions of statistical distributions . . . 2181
24.3.1 Uniform distribution . . . 2181
24.3.2 Normal distribution . . . 2182
24.3.3 Chi-squared distribution . . . 2183
24.3.4 Beta distribution . . . 2184
24.3.5 F distribution . . . 2185
24.3.6 Non-central Chi-squared distribution . . . 2186
24.3.7 Binomial distribution . . . 2187
24.3.8 Hypergeometric distribution . . . 2188
24.4 Helices and related curves traced on cylinders, cones and spheres . . . 2189
24.4.1 Cylindrical helix . . . 2190
24.4.2 Conical helix based on Archimedes spiral (spiral of Pappus) . . . 2191

24.4.3 Conical helix based on Fermat's spiral . . . 2192
24.4.4 Conical helix based on the logarithmic spiral (Concho-Spiral) . . . 2193
24.4.5 Rhumb line of the sphere . . . 2194
24.4.6 Clelia . . . 2195
24.4.7 Spherical helix . . . 2196
24.4.8 Satellite curve . . . 2198
24.5 (Coil) springs . . . 2200
24.5.1 Spring 1 . . . 2200
24.5.2 Spring 2 . . . 2201
24.5.3 Spring 3 . . . 2202
24.5.4 Spring 4 . . . 2203
24.5.5 Spring 5 . . . 2204
24.5.6 Spring 6 . . . 2205
24.5.7 Spring 7 . . . 2206
24.5.8 Spring 8 . . . 2207
24.6 General knots . . . 2208
24.6.1 Trefoil A . . . 2208
24.6.2 Trefoil B . . . 2209
24.6.3 Square knot . . . 2210
24.6.4 Granny knot . . . 2211
24.6.5 Cinquefoil Knot . . . 2212
24.6.6 74 Knot . . . 2213
24.6.7 Figure-eight knot . . . 2214
24.7 Torus knots . . . 2215
24.7.1 Torus knot 3:2 . . . 2215
24.7.2 Torus knot 5:2 . . . 2216
24.7.3 Torus knot 7:2 . . . 2217
24.7.4 Torus knot 7:3 . . . 2218
24.7.5 Torus knot 15:2 . . . 2219
24.8 Lissajous knots . . . 2220
24.8.1 Lissajous knot 1-1-1 . . . 2221
24.8.2 Lissajous knot 1-2-1 . . . 2222
24.8.3 Lissajous knot 1-5-3 . . . 2223
24.8.4 Lissajous knot 3-5-2 . . . 2224
24.8.5 Lissajous knot 3-5-7 . . . 2225
24.9 Polynomial knots . . . 2226
24.9.1 Polynomial knot 3-1 . . . 2226
24.9.2 Polynomial knot 4-1 . . . 2227
24.9.3 Polynomial knot 5-1 . . . 2228
24.9.4 Polynomial knot 6-2 . . . 2229
24.9.5 Polynomial knot 7-4 . . . 2230

25 Wpf: Built-in 3D objects 2231
25.1 Builtin solids with support for textures . . . 2232
25.1.1 Sphere . . . 2232
25.1.2 Prolate Spheroid . . . 2234
25.1.3 Oblate Spheroid . . . 2235
25.1.4 Ellipsoid . . . 2237
25.1.5 Torus . . . 2238
25.1.6 Rectangular cuboid . . . 2239
25.1.7 Rhombohedron . . . 2240
25.1.8 Parallelepiped . . . 2241
25.2 Builtin solids without support for textures . . . 2242
25.2.1 Triangular Prism . . . 2242

25.2.2 Square prism . . . 2243
25.2.3 Hexagonal prism . . . 2244
25.2.4 Octagonal prism . . . 2245
25.2.5 Cylinder . . . 2246
25.2.6 Cylinder, truncated by an inclined plane . . . 2247
25.2.7 Pyramid . . . 2248
25.2.8 Pyramid frustum . . . 2249
25.2.9 Pyramid, truncated by an inclined plane . . . 2250
25.2.10 Cone . . . 2251
25.2.11 Cone Frustum . . . 2252
25.2.12 Cone, truncated by an inclined plane . . . 2253
25.3 Platonic solids, and related solids . . . 2254
25.3.1 Tetrahedron . . . 2254
25.3.2 Cube . . . 2255
25.3.3 Octahedron . . . 2256
25.3.4 Dodecahedron . . . 2257
25.3.5 Icosahedron . . . 2258
25.3.6 Geodesic sphere . . . 2259
25.3.7 Augmented Octahedron . . . 2260
25.3.8 Augmented Dodecahedron . . . 2261
25.3.9 Augmented Icosahedron . . . 2262
25.3.10 Augmented Geodesic Sphere . . . 2263
25.3.11 Stella Octangula . . . 2264
25.3.12 Small stellated Dodecahedron . . . 2265
25.3.13 Great Dodecahedron . . . 2266
25.3.14 Great stellated Dodecahedron . . . 2267

VI Additional functions in double precision 2268

26 Real elementary functions 2269
26.1 Root, exponential, logarithmic and power functions . . . 2270
26.1.1 Auxiliary function $\mathrm{sqrt1pmx}(x) = \sqrt{1+x^2} - x$ . . . 2270
26.1.2 Bring radical . . . 2270
26.1.3 Auxiliary function $\mathrm{expmx2h}(x) = \exp(-x^2/2)$ . . . 2270
26.1.4 Relative error exponential $\mathrm{exprel}(x) = (\exp(x) - 1)/x$ . . . 2270
26.1.5 Auxiliary function $\mathrm{expx2}(x) = \exp(x \cdot |x|)$ . . . 2271
26.1.6 Auxiliary function $\mathrm{logistic}(x) = 1/(1 + \exp(-x))$ . . . 2271
26.1.7 Einstein functions . . . 2271
26.1.8 Auxiliary function $\mathrm{log1mexp}(x) = \log(1 - \exp(x))$ . . . 2272
26.1.9 Auxiliary function $\mathrm{log1pexp}(x) = \log(1 + \exp(x))$ . . . 2272
26.1.10 Auxiliary function $\mathrm{log1pmx}(x) = \log(1 + x) - x$ . . . 2272
26.1.11 Auxiliary function $\mathrm{logaddexp}(x, y) = \log[\exp(x) + \exp(y)]$ . . . 2272
26.1.12 Auxiliary function $\mathrm{logsubexp}(x, y) = \log[\exp(x) - \exp(y)]$ . . . 2273
26.1.13 Auxiliary function $\mathrm{logit}(x) = \log(x/(1.0 - x))$ . . . 2273
26.1.14 Wright ω function . . . 2273
26.1.15 Auxiliary function $\mathrm{compound}(x, n) = (1 + x)^n$ . . . 2274
26.1.16 Auxiliary function $\mathrm{comprel}(x, n) = (1 + x)^n - 1$ . . . 2274
26.1.17 Auxiliary function $\mathrm{hypot3}(x, y, z) = \sqrt{x^2 + y^2 + z^2}$ . . . 2274
26.1.18 Fibonacci polynomials, $\mathrm{fibpoly}(n, x)$ . . . 2274
26.1.19 Lucas polynomials, $\mathrm{lucpoly}(n, x)$ . . . 2275
26.1.20 Fibonacci function, $F_\nu(x)$, of real index ν . . . 2275
26.2 Trigonometric functions . . . 2276
26.2.1 Sine, x in degrees, $\mathrm{sind}(x)$ . . . 2276

26.2.2 Inverse sine, input in degrees, $\mathrm{asind}(x)$ . . . 2276
26.2.3 Cosine, x in degrees, $\mathrm{cosd}(x)$ . . . 2276
26.2.4 Inverse cosine, input in degrees, $\mathrm{acosd}(x)$ . . . 2276
26.2.5 Tangent, with x in degrees, $\mathrm{tand}(x)$ . . . 2277
26.2.6 Inverse tangent, input in degrees, $\mathrm{atand}(x)$ . . . 2277
26.2.7 Cotangent, with x in degrees, $\mathrm{cotd}(x)$ . . . 2277
26.2.8 Inverse cotangent, input in degrees, $\mathrm{acotd}(x)$ . . . 2278
26.2.9 Auxiliary function, $\mathrm{acos}(1-x)$ . . . 2278
26.2.10 Haversine function $\mathrm{hav}(x) = (1-\cos(x))/2$ . . . 2278
26.2.11 Inverse haversine function $\mathrm{archav}(x) = \mathrm{acos}(1-2x)$ . . . 2278
26.2.12 Versine function $\mathrm{vers}(x) = 1-\cos(x)$ . . . 2279
26.2.13 Coversine, $\mathrm{covers}(x) = 1-\sin(x)$ . . . 2279
26.2.14 Versint function $\mathrm{versint}(x) = x-\sin(x)$ . . . 2279
26.2.15 Integral of cos powers, $\mathrm{cosint}(n,x)$ . . . 2279
26.2.16 Integral of sin powers, $\mathrm{sinint}(n,x)$ . . . 2280
26.3 Hyperbolic functions . . . 2281
26.3.1 Cardinal hyperbolic sine, $\mathrm{sinhc}(x) = \sinh(x)/x$ . . . 2281
26.3.2 Auxiliary function, $\mathrm{sinhmx}(x) = \sinh(x)-x$ . . . 2281
26.3.3 Auxiliary function, $\mathrm{coshm1}(x) = \cosh(x)-1$ . . . 2281
26.3.4 Auxiliary function $\mathrm{acosh}(1+x)$ . . . 2281
26.3.5 Auxiliary function $\log(\cosh(x))$ . . . 2282
26.3.6 Auxiliary function $\log(\sinh(x))$ . . . 2282
26.3.7 Gudermannian function $\mathrm{gd}(x) = \mathrm{asin}(\tanh(x))$ . . . 2282
26.3.8 Inverse Gudermannian function $\mathrm{arcgd}(x) = \mathrm{atanh}(\sin(x))$ . . . 2282
26.3.9 Langevin function, $L(x)$ . . . 2283
26.3.10 Inverse Langevin function, $L^{-1}(x)$ . . . 2283
26.3.11 Solutions of Kepler's equation, $\mathrm{kepler}(M,e)$ . . . 2283
26.4 Gamma functions . . . 2285
26.4.1 Sign of the gamma function . . . 2285
26.4.2 Logarithm and sign of the gamma function . . . 2285
26.4.3 Logarithm of $\Gamma(1+x)$ . . . 2285
26.4.4 Logarithm of factorials: $\log(x!)$ . . . 2285
26.4.5 Logarithm of the binomial coefficient . . . 2286
26.4.6 Log-Beta function . . . 2286
26.4.7 Inverse of the gamma function, $\Gamma^{-1}(y)$ . . . 2286
26.4.8 Inverse of the logarithm of the gamma function, $\log\Gamma^{-1}(y)$ . . . 2287
26.4.9 Temme's regulated gamma function, $\Gamma^*(x)$ . . . 2287
26.4.10 Relative Pochhammer symbol, $((a)_x-1)/x$ . . . 2287
26.4.11 Catalan function $C(x)$ . . . 2287
26.4.12 Bessel Lambda function, $\Lambda(\nu,x)$ . . . 2288

27 Real elliptic functions **2289**
27.1 Conversions of parameters of elliptic functions . . . 2289
27.1.1 Elliptic nome $q(k)$ (DAMath) . . . 2289
27.1.2 Elliptic modulus $k(q)$ (DAMath) . . . 2289
27.1.3 Jacobi amplitude, $\mathrm{am}(x,k)$ (DAMath) . . . 2290
27.2 Elliptic integrals . . . 2291
27.2.1 Legendre complete elliptic integral $B(k)$ . . . 2291
27.2.2 Legendre complete elliptic integral $D(k)$ . . . 2291
27.2.3 Legendre incomplete elliptic integral $B(\phi,k)$ . . . 2291
27.2.4 Legendre incomplete elliptic integral $D(\phi,k)$ . . . 2292
27.2.5 Heuman's Lambda function, $\Lambda_0(\phi,k)$ . . . 2292
27.2.6 Jacobi Zeta function, $Z(\phi,k)$ . . . 2292
27.3 Bulirsch elliptic integrals . . . 2293

27.3.1 Complete elliptic integral of the 1st kind $\mathrm{cel1}(k_c)$ . . . 2293
27.3.2 Complete elliptic integral of the 2nd kind $\mathrm{cel2}(k_c, a, b)$ . . . 2293
27.3.3 General complete elliptic integral $\mathrm{cel}(k_c, p, a, b)$ . . . 2294
27.3.4 Incomplete elliptic integral of the 1st kind $\mathrm{el1}(x, k_c)$ . . . 2294
27.3.5 Incomplete elliptic integral of the 2nd kind $\mathrm{el2}(x, k_c, a, b)$ . . . 2294
27.3.6 Incomplete elliptic integral of the 3rd kind $\mathrm{el3}(x, k_c, p)$ . . . 2295
27.4 Maple style elliptic integrals . . . 2296
27.4.1 Complete integral of the 1st kind, $\mathrm{EllipticK}(k)$ . . . 2296
27.4.2 Complete integral of the 1st kind for imaginary modulus, $\mathrm{EllipticKim}(k)$ . . . 2296
27.4.3 Complementary complete integral of the 1st kind, $\mathrm{EllipticCK}(k) = K'(k)$ . . . 2296
27.4.4 Complete integral of the 2nd kind, $\mathrm{EllipticEC}(k)$ . . . 2297
27.4.5 Complete integral of the 2nd kind for imaginary modulus, $\mathrm{EllipticECim}(k)$ . . . 2297
27.4.6 Complementary complete integral of the 2nd kind, $\mathrm{EllipticCE}(k)$ . . . 2297
27.4.7 Complete integral of the 3rd kind, $\mathrm{EllipticPiC}(\nu, k)$ . . . 2298
27.4.8 Complete integral of the 3rd kind for imaginary modulus, $\mathrm{EllipticPiCim}(\nu, k)$ . . . 2298
27.4.9 Complementary complete integral of the 3rd kind, $\mathrm{EllipticCPi}(\nu, k)$ . . . 2298
27.4.10 Incomplete integral of the 1st kind, $\mathrm{EllipticF}(z, k)$ . . . 2299
27.4.11 Incomplete integral of the 2nd kind, $\mathrm{EllipticE}(z, k)$ . . . 2299
27.4.12 Incomplete integral of the 3rd kind, $\mathrm{EllipticPi}(z, \nu, k)$ . . . 2299
27.5 Jacobi theta functions at $x = 0$ for $0 \le q < 1$ . . . 2300
27.5.1 Jacobi theta function $\theta_1'(q)$ . . . 2300
27.5.2 Jacobi theta function $\theta_2(q)$ . . . 2300
27.5.3 Jacobi theta function $\theta_3(q)$ . . . 2300
27.5.4 Jacobi theta function $\theta_4(q)$ . . . 2300
27.6 Inverse Jacobi elliptic functions . . . 2302
27.6.1 Inverse Jacobi elliptic function $\mathrm{arcsn}(x, k)$ . . . 2302
27.6.2 Inverse Jacobi elliptic function $\mathrm{arccn}(x, k)$ . . . 2302
27.6.3 Inverse Jacobi elliptic function $\mathrm{arcdn}(x, k)$ . . . 2302
27.6.4 Inverse Jacobi elliptic function $\mathrm{arccd}(x, k)$ . . . 2303
27.6.5 Inverse Jacobi elliptic function $\mathrm{arcsd}(x, k)$ . . . 2303
27.6.6 Inverse Jacobi elliptic function $\mathrm{arcnd}(x, k)$ . . . 2303
27.6.7 Inverse Jacobi elliptic function $\mathrm{arcdc}(x, k)$ . . . 2304
27.6.8 Inverse Jacobi elliptic function $\mathrm{arcnc}(x, k)$ . . . 2304
27.6.9 Inverse Jacobi elliptic function $\mathrm{arcsc}(x, k)$ . . . 2304
27.6.10 Inverse Jacobi elliptic function $\mathrm{arcns}(x, k)$ . . . 2305
27.6.11 Inverse Jacobi elliptic function $\mathrm{arcds}(x, k)$ . . . 2305
27.6.12 Inverse Jacobi elliptic function $\mathrm{arccs}(x, k)$ . . . 2305
27.7 Lemniscate functions . . . 2307
27.7.1 Lemniscate sine function, $\mathrm{sinlemn}(x)$ . . . 2307
27.7.2 Lemniscate cosine function, $\mathrm{coslemn}(x)$ . . . 2307
27.7.3 Inverse lemniscate sine function, $\mathrm{arcsl}(x)$ . . . 2307
27.7.4 Inverse lemniscate cosine function, $\mathrm{arccl}(x)$ . . . 2308
27.8 Neville theta functions . . . 2309
27.8.1 Neville $\theta_c(x, k)$ . . . 2309
27.8.2 Neville $\theta_d(x, k)$ . . . 2309
27.8.3 Neville $\theta_n(x, k)$ . . . 2309
27.8.4 Neville $\theta_s(x, k)$ . . . 2310

28 Real functions related to Lerchs phi **2311**
28.1 Polygamma, and related functions . . . 2311
28.1.1 Pentagamma function $\psi'''(x)$ . . . 2311
28.1.2 Tetragamma function, $\psi''(x)$ . . . 2311
28.1.3 Auxiliary function $\psi^*(x)$ . . . 2311
28.1.4 Inverse digamma function $\psi^{-1}(y)$ . . . 2312

28.1.5 Bateman function $G(x)$ . . . 2312
28.2 Polylogarithm, and related functions . . . 2313
28.2.1 Polylogarithm of integer order, $\mathrm{Li}_n(x)$ . . . 2313
28.2.2 Fermi-Dirac integrals of integer order, $F_n(x)$ . . . 2313
28.2.3 Fermi-Dirac integral $F_{-1/2}(x)$ . . . 2314
28.2.4 Fermi-Dirac integral $F_{1/2}(x)$ . . . 2314
28.2.5 Fermi-Dirac integral $F_{3/2}(x)$ . . . 2314
28.2.6 Fermi-Dirac integral $F_{5/2}(x)$ . . . 2314
28.2.7 Inverse tangent integral, $\mathrm{Ti}_2(x)$ . . . 2315
28.2.8 Lobachevsky's log-cos integral, $L(x)$ . . . 2315
28.2.9 Lobachevsky's log-sin integral, $\Lambda(x)$ . . . 2315
28.2.10 Debye functions, $\mathrm{D}_n(x)$ . . . 2315
28.2.11 Transport integral, $\mathrm{J}_n(x)$ . . . 2316
28.3 Riemann zeta, and related functions . . . 2317
28.3.1 Riemann $\zeta(n)$ for integer arguments . . . 2317
28.3.2 Riemann $\zeta(1+x)$ . . . 2317
28.3.3 Dirichlet eta function for integer argument, $\eta(n)$ . . . 2317
28.3.4 Prime zeta function . . . 2318
28.3.5 Riemann prime counting function, $R(x)$ . . . 2318
28.3.6 Inverse of the Riemann prime counting function, $R^{-1}(x)$ . . . 2318
28.3.7 Rogers-Ramanujan continued fraction . . . 2318
28.3.8 Moebius function, $\mu(n)$ . . . 2319
28.3.9 q-Pochhammer Euler function, $(q)_\infty$ . . . 2319
28.4 Miscellaneous functions . . . 2320
28.4.1 Log-series distribution, pmf . . . 2320
28.4.2 Log-series distribution, cdf . . . 2320
28.4.3 Zeta distribution, pmf . . . 2320
28.4.4 Zeta distribution, cdf . . . 2321

29 Real functions related to ${}_0F_1$ 2322
29.1 Bessel functions of integer order . . . 2322
29.1.1 Bessel function of the 1st kind, order 0, $J_0(x)$ . . . 2322
29.1.2 Bessel function of the 1st kind, order 1, $J_1(x)$ . . . 2322
29.1.3 Bessel function of the 1st kind, integer order n, $J_n(x)$ . . . 2322
29.1.4 Bessel function of the 2nd kind, order 0, $Y_0(x)$ . . . 2323
29.1.5 Bessel function of the 2nd kind, order 1, $Y_1(x)$ . . . 2323
29.1.6 Bessel function of the 2nd kind, integer order n, $Y_n(x)$ . . . 2323
29.2 Modified Bessel functions of integer order . . . 2325
29.2.1 Modified Bessel function of the 1st kind, order 0, $I_0(x)$ . . . 2325
29.2.2 Modified Bessel function of the 1st kind, order 1, $I_1(x)$ . . . 2325
29.2.3 Modified Bessel function of the 1st kind, integer order n, $I_n(x)$ . . . 2325
29.2.4 Modified Bessel function of the 2nd kind, order 0, $K_0(x)$ . . . 2325
29.2.5 Modified Bessel function of the 2nd kind, order 1, $K_1(x)$ . . . 2326
29.2.6 Modified Bessel function of the 2nd kind, integer order n, $K_n(x)$ . . . 2326
29.2.7 Exponentially scaled modified Bessel function of the 1st kind, order 0, $I_{0,e}(x)$ . . . 2326
29.2.8 Exponentially scaled modified Bessel function of the 1st kind, order 1, $I_{1,e}(x)$ . . . 2327
29.2.9 Exponentially scaled modified Bessel function of the 2nd kind, order 0, $K_{0,e}(x)$ . . . 2327
29.2.10 Exponentially scaled modified Bessel function of the 2nd kind, order 1, $K_{1,e}(x)$ . . . 2327
29.3 Integrals of zero-order Bessel functions . . . 2328
29.3.1 Integral of J_0 . . . 2328
29.3.2 Integral of Y_0 . . . 2328
29.3.3 Integral of I_0 . . . 2328
29.3.4 Integral of K_0 . . . 2328
29.4 Kelvin functions of order 0 . . . 2330

29.4.1 Kelvin function $\mathrm{ber0}(x)$ . . . 2330
29.4.2 Kelvin function $\mathrm{bei0}(x)$ . . . 2330
29.4.3 Kelvin function $\mathrm{ker0}(x)$ . . . 2330
29.4.4 Kelvin function $\mathrm{kei0}(x)$ . . . 2331
29.4.5 First derivative of the Kelvin function $\mathrm{ber0}, \mathrm{ber0}'(x)$ . . . 2331
29.4.6 First derivative of the Kelvin function $\mathrm{bei0}, \mathrm{bei0}'(x)$ . . . 2331
29.4.7 First derivative of the Kelvin function $\mathrm{ker0}, \mathrm{ker0}'(\nu, x)$ . . . 2332
29.4.8 First derivative of the Kelvin function $\mathrm{kei0}, \mathrm{kei0}'(x)$ . . . 2332
29.5 Synchrotron functions . . . 2333
29.5.1 First synchrotron function $F(x)$ . . . 2333
29.5.2 Second synchrotron function $G(x)$ . . . 2333

30 Real functions related to ${}_1F_1$ 2334
30.1 Incomplete gamma functions . . . 2334
30.1.1 Tricomi's entire incomplete gamma function: $\gamma^*(a, x)$ . . . 2334
30.1.2 Truncated exponential function, $e_n(x)$ . . . 2334
30.1.3 Relative exponential, $\mathrm{exprel}_n(x)$ . . . 2335
30.2 Coulomb wave functions . . . 2336
30.2.1 Normalizing Gamow constant for Coulomb wave functions . . . 2336
30.2.2 Coulomb phase shift $\sigma_L(\eta)$ . . . 2336
30.2.3 Regular Coulomb wave functions $F_l(\eta, x), F_l'(\eta, x)$ . . . 2336
30.2.4 Irregular Coulomb wave functions $G_l(\eta, x), G_l'(\eta, x)$ . . . 2337
30.3 Error function, and related functions . . . 2338
30.3.1 Exponentially scaled complementary error function, $\mathrm{erfcx}(x)$ . . . 2338
30.3.2 Difference of error functions, $\mathrm{erfh}(x, h) = \mathrm{erf}(x + h) - \mathrm{erf}(x - h)$ . . . 2338
30.3.3 Difference of error functions, $\mathrm{erf2}(x_1, x_2) = \mathrm{erf}(x_2) - \mathrm{erf}(x_1)$ . . . 2338
30.3.4 Probability function $Q(x) = \Phi(-x)$ . . . 2338
30.3.5 Inverse of the exponentially scaled complementary error function, $\mathrm{erfcx}^{-1}(x)$ . . . 2339
30.3.6 Inverse of the imaginary error function, $\mathrm{erfi}^{-1}(x)$ . . . 2339
30.3.7 Generalized Dawson integral, $F(p, x)$ . . . 2339
30.3.8 Generalized error function, $\mathrm{erfg}(p, x)$ . . . 2340
30.3.9 Expint3, $\mathrm{erfg}(3, x)$ . . . 2340
30.3.10 Scaled repeated integrals of the complementary error function, $i^n\mathrm{erfc}(x)$ . . . 2340
30.3.11 Fresnel auxiliary function $\mathrm{f}(x)$ . . . 2341
30.3.12 Fresnel auxiliary function $\mathrm{g}(x)$ . . . 2341
30.3.13 Goodwin-Staton integral, $G(x)$ . . . 2341
30.3.14 Voigt function U . . . 2342
30.3.15 Voigt function V . . . 2342
30.3.16 Voigt function H . . . 2342
30.3.17 Voigt Profile distribution, pdf . . . 2343
30.4 Exponential integrals, and related functions . . . 2344
30.4.1 Entire cosine integral $\mathrm{Cin}(x)$ . . . 2344
30.4.2 Entire hyperbolic cosine integral $\mathrm{Cinh}(x)$ . . . 2344
30.4.3 Entire exponential integral $\mathrm{Ein}(x)$ . . . 2344
30.4.4 Scaled exponential integral $\mathrm{e1s}(x)$ . . . 2345
30.4.5 Scaled exponential integral $\mathrm{eis}(x)$ . . . 2345
30.4.6 Scaled exponential integral $\mathrm{eisx2}(x)$ . . . 2345
30.4.7 Inverse of the exponential integral, $\mathrm{Ei}^{-1}(x)$ . . . 2345
30.4.8 Generalized exponential integral $E_p(p, x)$ . . . 2346
30.4.9 Exponential integral $\beta_n(x)$ . . . 2346
30.4.10 Inverse of the logarithmic integral, $\mathrm{li}^{-1}(x)$ . . . 2346
30.4.11 Shifted sine integral $\mathrm{si}(x) = \mathrm{Si}(x) - \pi/2$ . . . 2347
30.5 Struve functions . . . 2348
30.5.1 Struve function $\mathbf{H}_0(x)$ . . . 2348

30.5.2 Struve function $\mathbf{H}_1(x)$ . . . 2348
30.5.3 Struve function $\mathbf{L}_0(x)$ . . . 2348
30.5.4 Struve function $\mathbf{L}_1(x)$ . . . 2348

31 Real and complex functions **2350**
31.1 Additional elementary complex functions . . . 2350
31.1.1 Auxiliary function $\sqrt{1-z^2}$ . . . 2350
31.1.2 Cube root, $\mathrm{cuberoot}(x) = \sqrt[3]{x} = y$, with $\arg(y)$ closest to $\arg(x)$ . . . 2350
31.1.3 Nth root, $\mathrm{surd}(x,n) = \sqrt[n]{x} = y$, with $\arg(y)$ closest to $\arg(x)$ . . . 2351
31.1.4 Continuous inverse cotangent, $\mathrm{acotc}(x)$ . . . 2351
31.1.5 Continuous inverse hyperbolic cotangent, $\mathrm{acothc}(x)$ . . . 2352
31.2 Weierstrass elliptic functions, in terms of (real) lattice invariants g_2, g_3 . . . 2353
31.2.1 Weierstrass function $\wp_g(z, g_2, g_3)$ . . . 2353
31.2.2 Weierstrass function, first derivative: $\wp'_g(z, g_2, g_3)$ . . . 2354
31.2.3 Weierstrass Zeta function $\zeta_g(z, g_2, g_3)$ . . . 2355
31.2.4 Weierstrass Sigma function $\sigma_g(z, g_2, g_3)$ . . . 2356
31.2.5 Inverse Weierstrass function $\wp_g^{-1}(z, g_2, g_3)$ . . . 2357
31.3 Weierstrass elliptic functions, in terms of (real) lattice roots e_1, e_2 . . . 2358
31.3.1 Weierstrass function $\wp_e(x, e_1, e_2)$ . . . 2358
31.3.2 Weierstrass function $\wp'_e(x, e_1, e_2)$ . . . 2358
31.3.3 Weierstrass Zeta function $\zeta_e(z, e_1, e_2)$ . . . 2359
31.3.4 Weierstrass Sigma function $\sigma_e(z, e_1, e_2)$ . . . 2359
31.3.5 Inverse Weierstrass function $\wp_e^{-1}(y, e_1, e_2)$ . . . 2360

VII User library: numerical **2361**

32 Additional Classes **2362**
32.1 User defined functions based on multiple precision arithmetic (Python) . . . 2363
32.1.1 Overview . . . 2363
32.1.2 Double-precision arithmetic (`fpmlib`) . . . 2363
32.1.3 Binary floating-point in arbitrary-precision and with arbitrary exponent (`mpmlib`) . . . 2363
32.1.4 Interval arithmetic in arbitrary-precision and with arbitrary exponent (`ipmlib`) . . . 2363
32.1.5 Decimal floating-point in arbitrary-precision with limited exponent (`dpmlib`) . . . 2363
32.1.6 Rational numbers (quotients) in arbitrary-precision (`qpmlib`) . . . 2363
32.1.7 Binary floating-point in arbitrary-precision with limited exponent (`gpmlib`) . . . 2364
32.1.8 Binary balls in arbitrary-precision and with arbitrary exponent (`apmlib`) . . . 2364
32.2 User defined functions based on fixed precision arithmetic (C#) . . . 2365
32.2.1 Scalar functions with `Double` and `Complex`: `m53lib` and `m53libc` . . . 2366
32.2.2 Binary floating point, single precision: `slib` and `slibc` . . . 2367
32.2.3 Binary floating point, double precision: `dlib` and `dlibc` . . . 2368
32.2.4 Binary floating point, extended precision: `elib` and `elibc` . . . 2369
32.2.5 Binary floating point, quadruple precision: `qlib` and `qlib` . . . 2370
32.2.6 Binary floating point, octuple precision: `olib` and `olibc` . . . 2371
32.3 User defined functions based on arbitrary precision arithmetic (C#) . . . 2372
32.3.1 Binary floating point, multiple precision: `mlib`, `mlibc` . . . 2373
32.3.2 Binary floating point, single precision: `sflib` and `sflibc` . . . 2373
32.3.3 Binary floating point, double precision: `dflib` and `dflibc` . . . 2374
32.3.4 Binary floating point, extended precision: `eflib` and `eflibc` . . . 2375
32.3.5 Binary floating point, quadruple precision: `qflib` and `qflibc` . . . 2376
32.3.6 Binary floating point, octuple precision: `oflib` and `oflibc` . . . 2377
32.3.7 Binary floating point, multiple precision: `mflib`, `mflibc` . . . 2378
32.3.8 Binary arbitrary precision ball: `aflib` and `aflibc` . . . 2379
32.4 Scalar functions . . . 2380

32.4.1 Real and complex sine . . . 2380
32.4.2 Quadratic equation . . . 2381
32.4.3 Monic cubic equation . . . 2382
32.4.4 Cubic equation . . . 2383
32.4.5 Quartic equation . . . 2384
32.4.6 Transscribed from Julia: complex elliptic functions in double precision . . . 2385
32.4.7 Transscribed from Julia: complex hurwitz function, and related, in double precision . . . 2386
32.4.8 Speeedups for iterative algorithms which require an initial guess . . . 2387
32.4.9 Examples for matrix functions . . . 2388

33 Distribution functions **2389**
33.1 Distributions related to multiple comparisons of means . . . 2389
33.1.1 Normal maximum distribution, $\rho_{ij,i\neq j} = \rho$: pdf, cdf, qtf, boost class . . . 2389
33.1.2 Normal maximum modulus distribution, $\rho_{ij,i\neq j} = \rho$: pdf, cdf, qtf, boost class . . . 2391
33.1.3 Normal maximum distribution, $\rho_{ij,i\neq j} = \lambda_i\lambda_j$: pdf, cdf, qtf, boost class . . . 2392
33.1.4 Normal maximum modulus distribution, $\rho_{ij,i\neq j} = \lambda_i\lambda_j$: pdf, cdf, qtf, boost class . . . 2393
33.1.5 Normal range distribution: pdf, cdf, qtf, boost class . . . 2395
33.1.6 Studentized maximum distribution: pdf, cdf, qtf, boost class . . . 2396
33.1.7 Studentized maximum modulus distribution: pdf, cdf, qtf, boost class . . . 2397
33.1.8 Dunnett t-distribution, 1-sided: pdf, cdf, qtf, boost class . . . 2398
33.1.9 Dunnett t-distribution, 2-sided: pdf, cdf, qtf, boost class . . . 2399
33.1.10 Nair t-distribution: pdf, cdf, qtf, boost class . . . 2400
33.1.11 Halperin t-distribution: pdf, cdf, qtf, boost class . . . 2401
33.1.12 Studentized range distribution: pdf, cdf, qtf, boost class . . . 2402
33.2 Discrete (lattice) distribution functions related to (stratified) rank tests . . . 2403
33.2.1 Kendall S (or tau) distribution (under H_0), pmf vector . . . 2403
33.2.2 Mann-Whitney U distribution (under H_0), pmf vector . . . 2403
33.2.3 Jonckheere-Terpsta S distribution (under H_0), pmf vector . . . 2403
33.2.4 Spearman ρ distribution (under H_0), pmf vector . . . 2403
33.2.5 Sign test distribution (under H_0), pmf vector . . . 2404
33.2.6 Wilcoxon T distribution (under H_0), pmf vector . . . 2404
33.2.7 Page L distribution (under H_0), pmf vector . . . 2404
33.2.8 Quade L distribution (under H_0), pmf vector . . . 2405
33.3 Discrete (non-lattice) distribution functions related to rank tests . . . 2406
33.3.1 Cochran S distribution (under H_0), pmf vector . . . 2406
33.3.2 Friedman S distribution (under H_0), pmf vector . . . 2406
33.3.3 Quade S distribution (under H_0), pmf vector . . . 2406

34 Inferential statistics **2407**
34.1 Basic classical statistical tests (stratified) . . . 2407
34.1.1 Student t-test for 1 sample: tests (p-values) and confidence intervals . . . 2407
34.1.2 Student t-test for 1 sample: power calculations . . . 2410
34.1.3 Student t-test for 1 sample: sample size calculation . . . 2412
34.1.4 Chi-squared-test for the variance of 1 sample: tests (p-values) . . . 2413
34.1.5 Chi-squared-test for the variance of 1 sample: confidence intervals . . . 2414
34.1.6 Chi-squared-test for the variance of 1 sample: power . . . 2415
34.1.7 Chi-squared-test for the variance of 1 sample: sample size . . . 2416
34.2 Basic classical statistical tests for 2 independent samples (stratified) . . . 2417
34.2.1 Student t-test for 2 independent samples: tests (p-values) . . . 2417
34.2.2 Student t-test for 2 independent samples: confidence intervals . . . 2419
34.2.3 Student t-test for 2 independent samples: power . . . 2421
34.2.4 Student t-test for 2 independent samples: sample size calculation . . . 2423
34.2.5 Student t-test for 2 independent samples: power and sample size: failure to stratify . . . 2425
34.2.6 Student t-test for 2 independent samples: equivalence and non-inferiority . . . 2426

34.2.7 F-test for the variances of 2 independent samples: tests (p-values) . . . 2427
34.2.8 F-test for the variances of 2 independent samples: confidence intervals . . . 2429
34.2.9 F-test for the variances of 2 independent samples: power . . . 2431
34.2.10 F-test for the variances of 2 independent samples: sample size . . . 2433
34.3 Basic classical statistical tests for 2 correlated samples (stratified) . . . 2435
34.3.1 Student t-test for 2 correlated samples: tests (p-values) . . . 2435
34.3.2 Student t-test for 2 correlated samples: confidence intervals . . . 2437
34.3.3 Student t-test for 2 correlated samples: power . . . 2439
34.3.4 Student t-test for 2 correlated samples: sample size calculation . . . 2441
34.3.5 Morgan-Pitman test for the variances of 2 correlated samples: tests (p-values) . . . 2443
34.3.6 Morgan-Pitman test for the variances of 2 correlated samples: confidence intervals . . . 2445
34.3.7 Morgan-Pitman test for the variances of 2 correlated samples: power . . . 2447
34.3.8 Morgan-Pitman test for the variances of 2 correlated samples: sample size . . . 2449
34.3.9 Pearson's rho, 2 correlated samples: tests (p-values) . . . 2451
34.3.10 Pearson's rho, 2 correlated samples: confidence intervals . . . 2453
34.3.11 Pearson's rho, 2 correlated samples:: power . . . 2455
34.3.12 Pearson's rho, 2 correlated samples:: sample size calculation . . . 2457

VIII User library: graphics 2459

35 Distribution functions 2460
35.1 Introduction to 2D functions plots . . . 2460
35.1.1 Plots of continuous distribution functions . . . 2460
35.1.2 Plots of discrete distribution functions . . . 2463

36 Complex functions 2465
36.1 Additional complex functions . . . 2466
36.1.1 Elliptic K . . . 2466

IX Back matter 2467

37 License and History 2468
37.1 Mozilla Public License Version 2.0 . . . 2468
37.2 History . . . 2474

Bibliography 2475

Index 2548

Part I

Getting started

CHAPTER

ONE

SETUP AND GENERAL USAGE

XlCalcNet is a numerical library with parts written in Python and other parts written in C#, C++, C and Pascal, with focus on numerical calculations in multiple precision and data visualisation.

Since one of the main goals is to give access to software written in Python (or via PythonNet software written in C#) from within spreadsheet formulas, a dedicated CPython installation is strongly recommend, to make it easier to configure the interaction with Microsoft Excel and/or LibreOffice Calc, without disturbing existing Python installations.

The interaction with LibreOffice Calc is based on the fact that LibreOffice has built-in support for writing spreadsheet functions (which appear in the Function Wizard) in Python.

The interaction with Microsoft Excel is achieved by running a socket server written in Python, which is called from spreadsheet formulas using the functionality provided by Excel.Dna.

On the Python side XlCalcNet uses Mpmath 4.0 to provide a rich set of functions in arbitrary precision, using not only Mpmath's binary and interval data types, but also Python's built-in Decimal and Fraction data types. If GMP2 is installed, its data types can be used in many cases instead of Mpmath's binary data types, being much faster. Likewise, if Python-Flint is installed, its data types can be used in many cases instead of Mpmath's interval data types, being much faster, and often also more accurate.

On the C/C++ side, XlCalcNet uses DAMath, Boost Math, Boost Multiprecision and Eigen to provide numerical functions in single, double, extended, quadruple and octuple precision, which are available to the user both from C# and Python.

The XlCalcNet2 library, which is licensed under the LGPL-3.0 and is therefore provided as a separate project, is based on Boost Math, Boost Multiprecision, Eigen, GMP, MPFR, MPC and Flint and provides additional functions for the same fixed-precision data types as XlCalcNet and also in arbitrary precision.

XlCalcNet is intended to be used together with existing Python libraries like NumPy, Matplotlib, Pandas, SciPy. It can also be used from recent versions of RStudio and R, using the reticulate package.

1.1 Setting up XlCalcNet

1.1.1 Installing XlCalcNet

1.1.1.1 Installing a version of Python which is dedicated to MS Excel and/or LibreOffice Calc

The XlCalcNet package is compatible with Python versions 3.8 - 3.15. It is recommended to use a version of CPython which is both mature and supported. In this manual, we will use Python version 3.13.15.

> **Important**
>
> However, if we want to use XlCalcNet with LibreOffice (version 7.0 or later, 64 bit), we need to make sure that the version which we install is compatible with the main Python core installation of LibreOffice, which means that the first 2 numbers of the version number `x.y.z` must match.

To find out which version this is, follow these steps: In the folder `C:\Program Files\LibreOffice\program` double-click on `python.exe`. This opens the python console, which in the first line states which Python version is used. At the time of writing (October 2026), the most current version of LibreOffice is version 26.8, which uses Python version 3.13.15. Earlier version of LibreOffice use different versions of Python.

Python can be installed in different ways. It is recommended to install Python as a dedicated version for use with MS Excel and/or LibreOffice Calc, which does not require uninstalling any previous versions of Python, does not interfere with other Python installations, and does not require administrative privileges.

As installation folder any folder can be used for which the user has read and write access. In the following we will assume that the installation folder is `C:\Python313`. We assume that the path to this folder is NOT added to the PATH environment variable.

As an example of the installation process, we download the windows installer of version 3.13.15 (64 bit) from https://www.python.org/downloads/release/python-31315/. We will install this version into the folder `C:\Temp`, so we make sure beforehand that this folder exists and is empty.

In the Download folder, double-click on the downloaded file `python-3.13.15-amd64.exe` to start the installation. Click on "Customize installation".

In the next dialog page "Optional Features" unselect "Documentation", "Python test suite", "py launcher" and "for all users". Click on "Next".

In the next dialog page "Advanced Options" unselect all items, including "Create shortcuts". In the line below "Customize install location" enter `C:\Temp`. Click on `Install`. Once the installation has been completed, the last dialog page "Setup was successful" appears. Click on `Close`.

In the Windows explorer, navigate to the folder `C:\Temp`. Open another Windows explorer instance, navigate to `C:\`, and create the folder `C:\Python313`. Copy (DO NOT move!) the content of `C:\Temp` into `C:\Python313`.

Click the Start button and open **Settings** (or press `Windows Key + I`). Click on **Apps** on the left menu. Select **Installed apps** to view and manage all programs installed on your PC. Navigate to "Python 3.13.15 (64-bit)" and click on the `...` symbol. Select `Uninstall` and confirm. Once Uninstall has been completed, the last dialog page "Uninstall was successful" appears. Click on `Close`.

Now the folder `C:\Temp` can be deleted. The folder `C:\Python313` contains the ("freestanding") Python version that we will work with in this manual.

1.1.1.2 First steps with XlCalcNet

Since the path to `C:\Python313` is not added to the PATH environment variable, it is convenient to prepare, within the `C:\Python313` folder, batch files for the installation of the Python packages which one wishes to install and possibly update later.

The first batch file will ensure that our version of pip is up to date. Right-click over any free space in the `C:\Python313` folder, select `New -> Text Document`. Rename this document to `A01upgradepip.bat`, ignoring the warning. Open this file for editing in the

Windows standard editor. Type `python -m pip install -U --no-warn-script-location pip` as install command, begin a new line, type `pause`, save the file, and close the editor.

Now double-click on `A01upgradepip.bat`. This will update pip as needed.

In the same way prepare a batch file named `A02installxlcalcnet.bat`, using `python -m pip install -U xlcalcnet` as install command. Double-click on `A02installxlcalcnet.bat`. This will install the latest version of the XlCalcNet package.

To check that this installation was successful, double-click on `python.exe`, which will open the python console:

```
>>> from xlcalcnet import mpm
>>> mpm.dps = 40
>>> mpm.sqrt(2)
    mpf('1.4142135623730950488016887242096980785696 62')
```

1.1.1.3 The 3 folders which are used by XlCalcNet

XlCalcNet uses the following 3 folders:

- The installation folder (in our example `C:\Python313\Lib\site-packages\xlcalcnet`), which contains the program code of the package (which should not be changed by the user during normal use). This folder is automatically created during the installation of XlCalcNet.
- The `DataXlCalcNet` folder in the Documents folder, which contains code examples and data which are directly manipulated by the user. This folder needs to created manually by the user (see below).
- The `XlCalcNetIDE` folder in the AppDataLocal folder, which contains data or executable binaries which are generated as a result of running a Python script or C# program. This folder is automatically created while using XlCalcNet.

Important

It is crucial for the correct functioning of XlCalcNet that the `DataXlCalcNet` folder is located in the Documents folder. The `DataXlCalcNet` folder has already been downloaded during the installation of XlCalcNet; it is located in the installation folder (in our example `C:\Python313\Lib\site-packages\xlcalcnet`). **The user needs to copy it manually from the installation folder into the Documents folder**.

1.1.1.4 Preparing the use of additional installation batch files for installing Python packages

The `DataXlCalcNet` folder contains a number of batch files for installing additional Python packages which can be used with XlCalcNet. These batch files are located in the subfolder `\PythonBatchFiles\BatchFiles`. The user can copy these batch files into the `C:\Python313` folder, and double-click on them to install the corresponding Python packages. The user can also create new batch files for installing additional Python packages, using the same procedure as described above for creating the batch files `A01upgradepip.bat` and `A02installxlcalcnet.bat`.

1.1.2 Installing and using Python.NET: Calling C# from Python

Python.NET is a package that gives Python programmers nearly seamless integration with the .NET Common Language Runtime (CLR) and provides a powerful application scripting tool for .NET developers. It allows Python code to interact with the CLR, and may also be used to embed Python into a .NET application.

See https://github.com/pythonnet/pythonnet

Assuming that the Python batch files have been installed as described *here*, Python.NET can be installed by double-clicking on the batch file `A03installpythonnet.bat` in the `C:\Python313` folder.

To check that this installation was successful, double-click on `python.exe`, which will open the python console. With Python.NET installed, we can access the C# module `qreal`, which provides functions in quadruple precision:

```
>>> from xlcalcnet import qreal
>>> qreal.sqrt(2)
    qreal('1.41421356237309504880168872420970')
```

Soem background information:

.NET Framework is part of the Microsoft Windows operating system since Windows Vista; .NET Framework 4.x can be installed since Windows XP. Recent versions of Windows (Windows 7 - Windows 11), which have been kept fully maintained, have .NET Framework 4.8 installed, which is the latest version of .NET Framework and will continue to be distributed with future releases of Windows. As long as it is installed on a supported version of Windows, .NET Framework 4.8 will continue to also be supported (see https://dotnet.microsoft.com/en-us/platform/support/policy/dotnet-framework).

As part of the .NET Framework 4.x runtime, 3 different compilers are provided: csc.exe (C#), vbc.exe (Visual Basic), and jsc.exe (JScript).

The 32 bit targeting versions are located in `C:\Windows\Microsoft.NET\Framework\v4.0.30319` and those for 64 bit in `C:\Windows\Microsoft.NET\Framework64\v4.0.30319`.

It is important to note that these compilers are not part of Visual Studio but part of Windows; they are, in a way, the closest to a compiler as part of the operating system that Windows has ever come up with. On the other hand, these compilers have been tugged away with the rest of the .NET Framework 4.x runtime; in that sense, they are "hidden" compilers.

In the following, we will ignore the Visual Basic and JScript compilers, but focus only on C#. The C# compiler supports only language versions up to C# 5. Luckily, this still provides us with all language features which we need for our purposes.

In terms of usability, the .NET Framework 4.x runtime does not include an IDE; we therefore include a Tiny IDE as described below.

1.1.3 Installing and using the Tiny IDE as a Python application

1.1.3.1 Installation

With the `DataXlCalcNet` folder in the Documents folder and Python.NET installed, we can start using the "Tiny C#/Python IDE", which makes it easy to edit and run small programs written in Python or C#. The Tiny IDE is a Python program (it is started with `pythonw.exe`) which loads a UserControl written in C#. This is made possible by Python.NET.

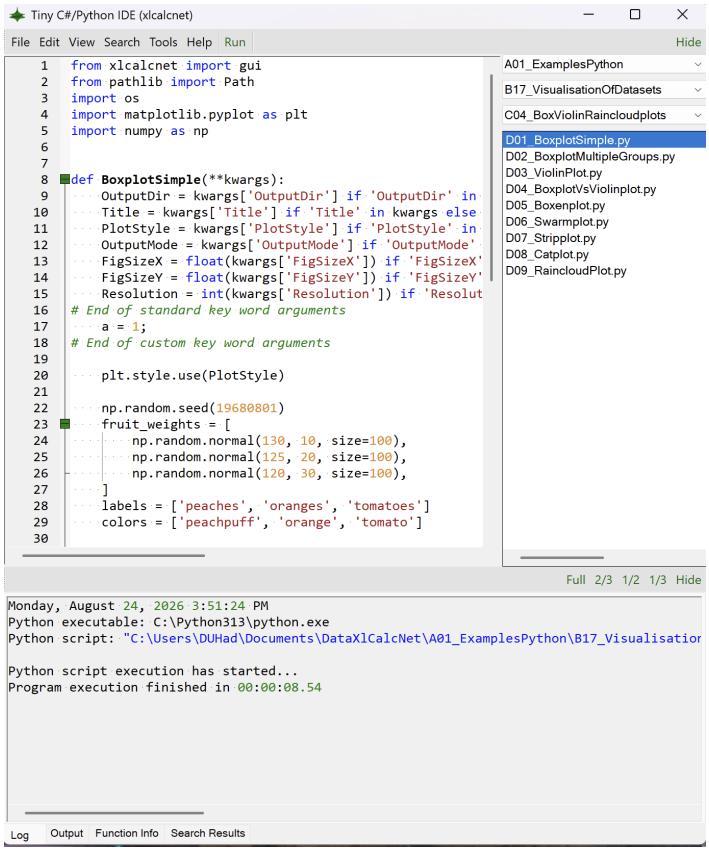

Follow these steps to make the Tiny IDE available:

- In the Python installation folder, rightclick on `pythonw.exe`.
- Select `Create shortcut` -> Result: `pythonw.exe-Shortcut`. (On Windows 11: Select `Show more options` -> `Create shortcut` -> Result: `pythonw.exe-Shortcut`.)
- Rightclick on `pythonw.exe-shortcut`; Select Properties.
- In the dialogue Properties, select "Target", and type:`C:\Python313\pythonw.exe C:\Users\DUHad\Documents\DataXlCalcNet\A01_ExamplesPython\B01_GeneralUsage\C01_Setup\D03_ShowEditor.py`. Here the path to the documents folder (in our case `C:\Users\DUHad\Documents`) needs to be changed to meet the settings of your system. Then save.
- Rename `pythonw.exe-Shortcut` to `TinyIDE_Python313`
- Doubleclick on `TinyIDE_Python313`
- In the task-bar, right-click on the appearing Python symbol, and select "Pin to taskbar"

From now on, you can start the Tiny IDE by clicking on this Python symbol on the taskbar. To start an additional instance of the Tiny IDE when the Tiny IDE is already running, click in the main menu on `Tools` -> `Tiny IDE (external)`. Note that the Python source code for starting the Tiny IDE is also the Python code example which is shown after starting the Tiny IDE (in `A01_ExamplesPython\B01_GeneralUsage\C01_Setup\D03_ShowEditor.py`), so clicking on `Run` will also start an additional instance. However, now

the program does not return until it is closed, as it is not running in an additional instance of Python; running the program like this is useful for debugging and testing purposes, like modifying title, width and height of the window, which can be changed on lines 67-68.

1.1.3.2 Overview

The Tiny IDE is designed around the structure of the `DataXlCalcNet` folder, making it easy to navigate and manage existing code examples, as well a new code written by the user. The Tiny IDE can be used only to edit and run Python or C# code examples which are located in the `DataXlCalcNet` folder and are located in subfolders beginning with `A0`. The code examples are organized in a tree structure, which is shown in the top right panel (the "folder panel") of the Tiny IDE.

The top left panel (the "editor panel") of the Tiny IDE shows the code of the selected file, which can be edited and run. The Tiny IDE also provides features like syntax highlighting, autocompletion, bookmarks, code folding, and error highlighting to make coding easier.

The output of the program is shown in the bottom panel (the "output panel") of the Tiny IDE, which has 4 tabs: the "Log" tab, which documents the progress of compiling and running the code (and also displays warning and error messages); the "Output" tab, which shows the text output of the program (if any); the "Function Info" tab, which provides information about the functions (if they belong to a module from XlCalcNet); and the "Search Results" tab, which shows the search results.

Each file in the `DataXlCalcNet\A0*` folders can be opened in the Tiny IDE by clicking on it. Per Tiny IDE instance, only one file can be opened, edited and run at a time (to open an additional file, you need to start a new instance of the Tiny IDE: `Tools -> Tiny IDE (external)`). The Tiny IDE will load this file into the editor, and the code can be edited and run. To run the code, click on the "Run" button in the main menu. The output of the program (if any) is shown in the output tab of the output panel.

The ordering and naming of the code examples in the subfolders `A01_ExamplesPython` and `A02_ExamplesCSharp` matches the ordering and naming of the corresponding chapters, sections and subsections in this manual, making it easy to find the code example which corresponds to a specific section of the manual. In addition, the "section help" feature (`Help -> Section Help`), which is available in the main menu of the Tiny IDE and opens the corresponding section of this manual in a web browser, depends on this ordering and naming.

Also, in Python, the feature that code examples can be called like modules, using statements like `from A01_ExamplesPython.B17_VisualisationOfDatasets.C01_BarCharts import D01_BarChartPart1`, depends on keeping this ordering and naming intact.

Therefore the names of these folders and files should not be changed, and new code examples should be added to the appropriate folders, either `A03_UserlibPython` or `A04_UserlibCSharp` for user-defined libraries, or `A05_UserExamplesPython` or `A06_UserExamplesCSharp` for code examples which demonstrate the use of existing or user-defined libraries. The Tiny IDE will automatically detect new files and folders, and will update the tree structure accordingly.

1.1.3.3 The menu bar of the Editor

The Menubar of the Tiny IDE contains the following menus: `File`, `Edit`, `View`, `Search`, `Tools`, and `Help`. Each menu contains a number of items, which are described below.

There are also two buttons (with green foreground color) in the menu bar: the "Run" button, which runs the code of the current file, and the "Show/Hide" button, which toggles the visibility of the folder panel.

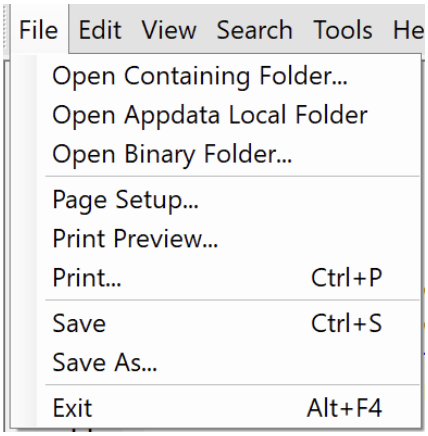

In the `File` menu, two standard items are missing: "New" and "Open".

The "New" item is missing because the Tiny IDE is designed to work within the `DataXlCalcNet` folder, and therefore new files which are not in the current folder should be created in the appropriate subfolders of `DataXlCalcNet`, which often have to be created manually first using the Windows Explorer.

There is, however, a `Save As` item in the file menu, which allows to save the current file under a new name in the current folder. This is useful for creating a copy of an existing file, and using this as a starting point for a new file.

The "Open" item (which would typically open a dialog box with the functionally of the Windows Explorer) is missing because the Tiny IDE is limited to the `DataXlCalcNet` folder. Instead the folder panel allows to navigate through the `DataXlCalcNet` folder and open any file in it.

Renaming or deleting files and folders is possible, but should be done with care, using the Windows Explorer, and not using the Tiny IDE. After these changes, when returning to the Tiny IDE, the tree structure will not be updated automatically, but has to be updated manually by clicking on the appropriate parent folder in the tree structure.

`Open Containing Folder` opens the Windows Explorer in the folder of the current file. This is useful for quickly accessing other files in the same folder, or for deleting files and folders.

`Open Appdata Local Folder` opens the Windows Explorer in the `AppData\Local\XlCalcNetIDE` folder. This is useful for quickly accessing files and folders which are generated by running Python or C# code examples in the Tiny IDE.

`Open Binary Folder` opens the Windows Explorer in the `Bin` subfolder of the `XlCalcNet` installation. This is useful mostly for debugging purposes.

`Page Setup` opens the standard Windows dialog for setting up the page layout for printing. `Print Preview` opens a preview of the current file, which can be printed from there. `Print` opens the standard Windows dialog for printing the current file.

`Save` will just save the current file without any further action. `Save As` has been descibed above. `Exit` will close the Tiny IDE.

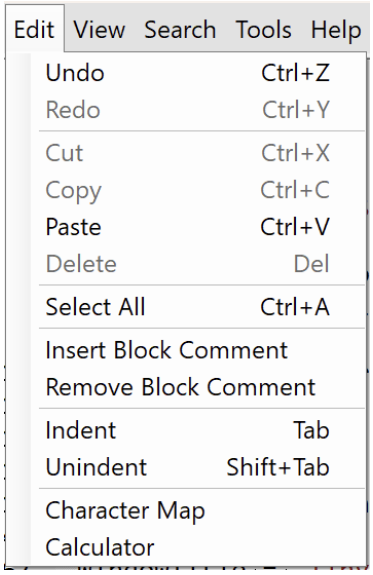

In the `Edit` menu, `Undo`, `Redo`, `Cut`, `Copy`, `Paste`, `Delete`, and `Select All` are standard items. `Insert BlockComment` and `Remove BlockComment` allows to comment or uncomment a block of code, which is useful for testing purposes (these 2 items are available in the context menu as well). `Indent` and `Unindent` allow to indent or unindent a block of code, which is useful for formatting purposes.

`Character Map` opens the standard Windows dialog for selecting special characters, which can be inserted into the code. `Calculator` opens the standard Windows calculator, which can be used for quick calculations.

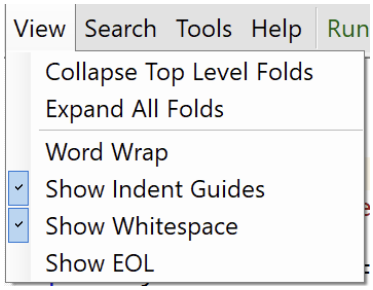

In the `View` menu, `Collapse Top Level Folds` allows to collapse all top level folds in the code, which is useful for quickly navigating through the code.

`Expand All Folds` allow to collapse or expand all folds in the code, which will make all code visible

`Show Indentation Guides` toggles the visibility of indentation guides in the editor panel.

`Word Wrap` toggles word wrap in the editor panel.

`Show Whitespace` toggles the visibility of whitespace characters in the editor panel.

`Show EOL` toggles the visibility of end of line markers in the editor panel.

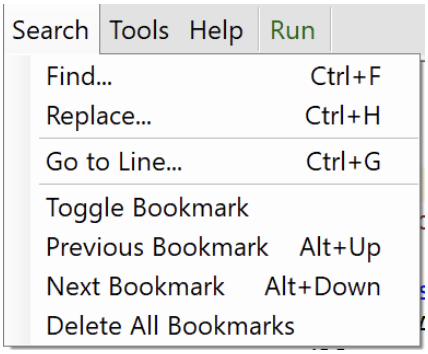

In the `Search` menu, `Find` starts the search for a string in the code, `Replace` allows to replace a string in the code, and `Goto` allows to jump to a specific line number in the code.

The corresponding dialog boxes are shown below:

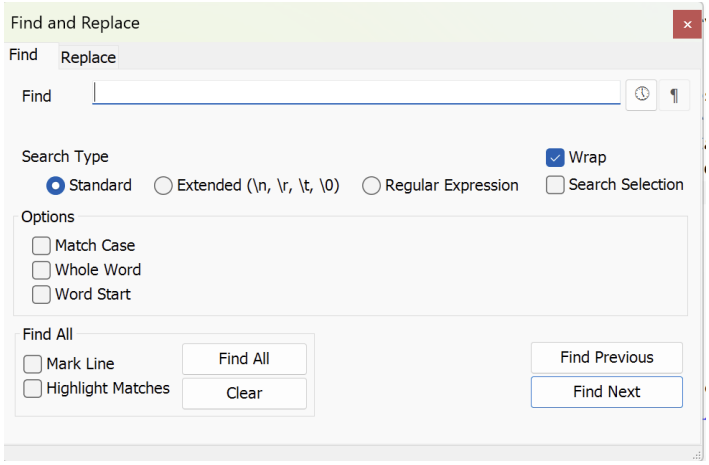

If the string is found, the first occurrence is highlighted in the code. If the string is not found, a message box appears which informs that the string was not found. The search can be continued by clicking on `Find Next` or `Find Previous`. The search can be limited to the current selection, and it can be case sensitive or insensitive. The search can also be done using regular expressions.

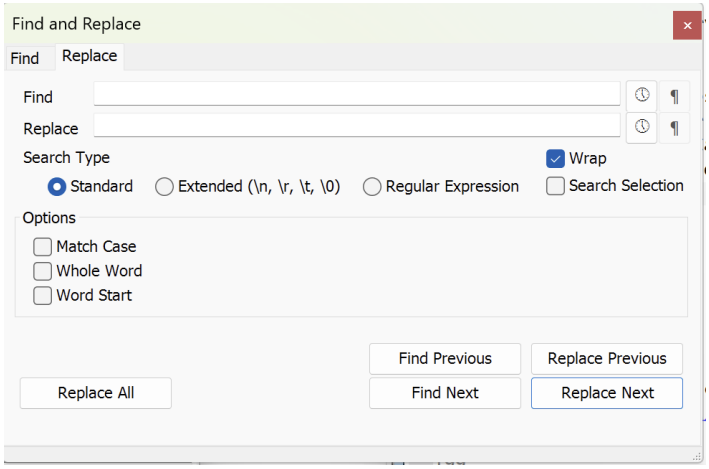

If the string is found, the first occurrence is highlighted in the code. If the string is not found, a message box appears which informs that the string was not found. The search can be continued by clicking on `Find Next` or `Find Previous`. `Replace Next`, `Replace Previous` or `Replace All` can be used to decide what to do with the found string. The search can be limited to the current selection, and it can be case sensitive or insensitive. The search can also be done using regular expressions.

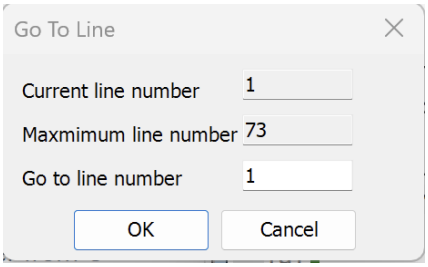

if the line number is valid, the cursor jumps to the specified line number. If the line number is invalid, a message box appears which informs that the line number is invalid.

`Toggle Bookmark` allows to set or delete a bookmark in the code, which can be used to quickly navigate through the code. `Delete All Bookmarks` deletes all bookmarks in the code. `Next Bookmark` jumps to the next bookmark in the code. `Previous Bookmark` jumps to the previous bookmark in the code.

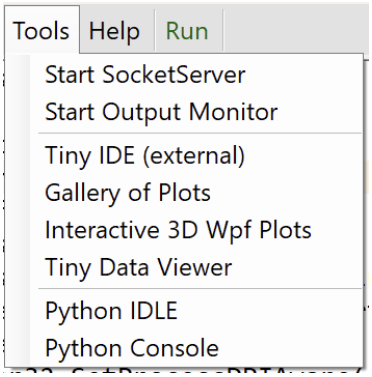

In the `Tools` menu, `Start Socket Server` starts the socket server, see *here* for details.

`Start Output Monitor` starts the output monitor application, see *here* for details.

`Tiny IDE (external)` starts an additional instance of the Tiny IDE, which can be used to edit and run another file.

`Gallery of Plots` starts the gallery of plots application, see *here* for details.

`Interactive 3D Wpf Plots` starts the Interactive 3D Wpf Plots application, see *here* for details.

`Tiny Data Viewer` starts the Tiny Data Viewer application, see *here* for details.

`Python IDLE` starts the Python IDLE application.

`Python Console` starts the Python console.

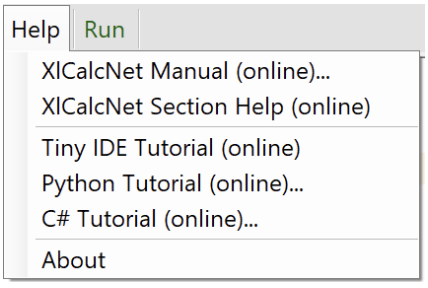

In the `Help` menu, `XlCalcNet Manual (online)...` displays the start page of the XlCalcNet online manual in a web browser.

`XlCalcNet Section Help (online)...` displays the section of the XlCalcNet.online manual which corresponds to the current file in a web browser.

`Tiny IDE Tutorial (online)...` displays the section of the XlCalcNet.online manual which explains the use of the Tiny IDE in a web browser.

`Python Tutorial (online)...` displays the online tutorial for Python, which is available on the official Python website in a web browser.

`C\# Tutorial (online)...` displays the online tutorial for C#, which is available on the official C# website in a web browser.

`About XlCalcNet...` displays information about the XlCalcNet package, including version number and copyright information.

1.1.3.4 The context menu of the editor

Right-clicking in the editor panel opens a context menu, which provides quick access to common actions like `Insert Block`, `Remove Block Comment`, `Collapse Top Level Folds`, `Expand All Folds`, `Goto Previous Bookmark`, `Goto Next Bookmark`, all of which are also available in the main menu.

New in this context menu is the item `Show Function Info`, which for functions which belong to a module from XlCalcNet, displays information about the function in the "Function Info" tab of the output panel.

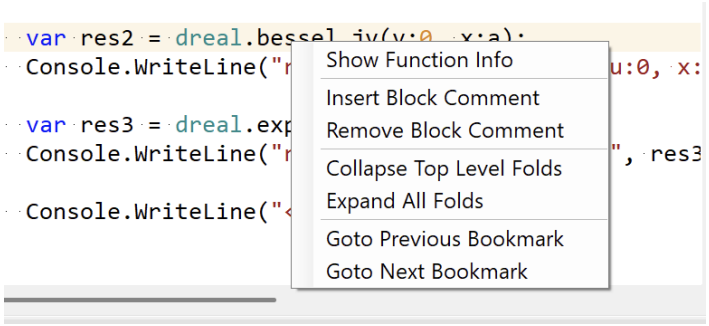

In the screenshot above, the context menu is shown after right-clicking on the function `dreal.bessel_jv` (with the curser to the right of the dot). The item `Show Function Info` is highlighted, and the corresponding information about this function is shown in the "Function Info" tab of the output panel below.

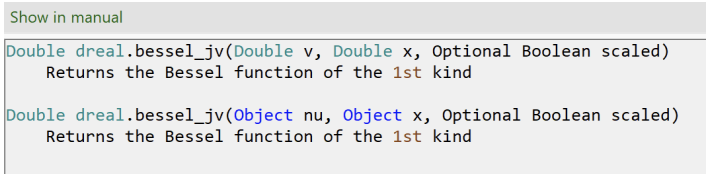

Just to the upper left of the `Show Function Info` item, the button `Show in Manual` is visible. Clicking on this button opens the corresponding section of the XlCalcNet online manual in a web browser.

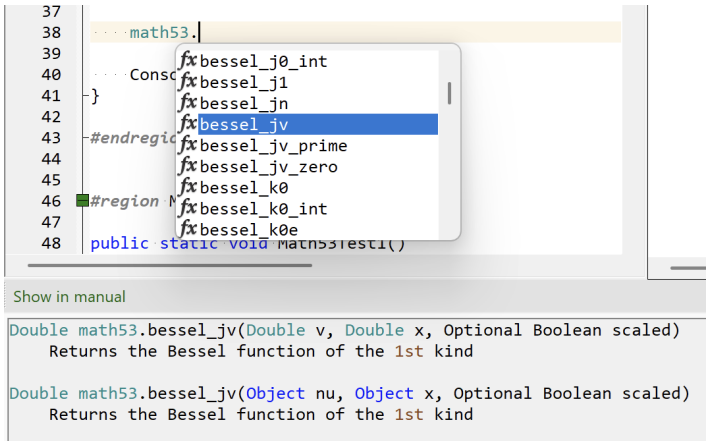

This works in combination with the autocomplete feature, which is activated by pressing `Ctrl + Space`. The autocomplete feature shows a list of functions which belong to a module from XlCalcNet, and for each function, the corresponding information is shown in the "Function Info" tab of the output panel. This allows to quickly find the function which is needed, and to see how it can be used.

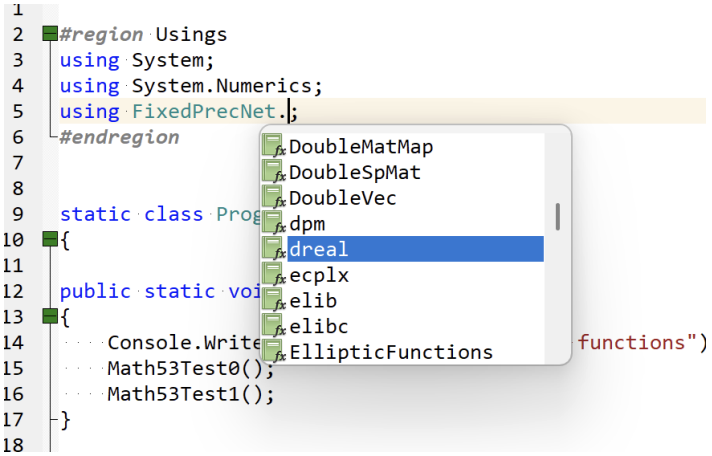

The autocomplete feature also works for user-defined libraries, however in these cases no additional information is shown in the "Function Info" tab of the output panel.

1.1.3.5 The Python development cycle in the Tiny IDE

Here we describe the Python development cycle in the Tiny IDE for producing and running python programs. The process for producing a Python library is similar but different, and is described *here*.

Overall, the Python development cycle in the Tiny IDE consists of the following steps: The file is opened in the editor panel, and the code is edited as needed. The code can be run by clicking on the "Run" button in the main menu bar. If there are any errors or warnings, they are shown in the "Log" tab of the output panel. When clicking on the error messages in the "Log" tab, they are also highlighted in the code. After correcting the errors, the "Run" button can be clicked again. If there are no errors, the code is is executed. Any text output of the program is shown in the "Output" tab of the output panel after the program has finished running.

These steps are illustrated in the following screenshots, which show the Python development cycle in the Tiny IDE for producing and running python programs.

```
 1
 2  # See: https://python-graph-gallery.
 3
 4  from xlcalcnet import gui
 5  from pathlib import Path
 6  import os, time
 7  import seaborn as sns
 8  import pandas as pd
 9
10
11  def KdePlot3(**kwargs):
56  try:
64  except Exception:
```

Directly after loading the Python code example, the code is folded, and the “Log” tab of the output panel is empty. The “Output” tab of the output panel is also empty, since the program has not been run yet. The unfolded code looks like this:

```
# See: https://python-graph-gallery.com/80-contour-plot-with-seaborn/

from xlcalcnet import gui
from pathlib import Path
import os, time
import seaborn as sns
import pandas as pd

def KdePlot3(**kwargs):
    OutputDir = kwargs['OutputDir'] if 'OutputDir' in kwargs else 'OutputMonitor'
    Title = kwargs['Title'] if 'Title' in kwargs else 'KdePlot3'
    PlotStyle = kwargs['PlotStyle'] if 'PlotStyle' in kwargs else 'default'
    OutputMode = kwargs['OutputMode'] if 'OutputMode' in kwargs else 'svg'
    FigSizeX = float(kwargs['FigSizeX']) if 'FigSizeX' in kwargs else 4
    FigSizeY = float(kwargs['FigSizeY']) if 'FigSizeY' in kwargs else 4
    Resolution = int(kwargs['Resolution']) if 'Resolution' in kwargs else 300
# End of standard key word arguments

    # Choose 'Agg' as backend unless we want to display the graphics
    if (OutputMode != 'gui'):
        import matplotlib
        matplotlib.use('Agg')
    import matplotlib.pyplot as plt
    plt.style.use(PlotStyle)

    fn = gui.get_dataxlcalcnet()
    fn += r'\DataExamples\MainExamples\Workbooks\Datasets.xlsx'
    datasets = pd.ExcelFile(fn)
    df = pd.read_excel(datasets, 'iris')

    sns.set_style('white')
    sns.kdeplot(x=df.sepal_width, y=df.sepal_length,
                cmap='Blues', fill=True, bw_adjust=0.5)

    fig = plt.gcf()
    fig.tight_layout()


# Start of output choices
    if (OutputMode == 'plt'):
        plt.show()
    elif (OutputMode == 'gui'):
        gui.plot(fig, __file__, Title)
    else:
```

(continues on next page)

(continued from previous page)

```
        FName = 'Temp'
        if OutputDir != 'Temp': FName = (Path(__file__).stem)
        LocalDir = gui.get_local_appdata_xlcalcnet()
        FullPath = os.sep.join([LocalDir, OutputDir, FName + '.' + OutputMode])
        plt.savefig(FullPath,  bbox_inches='tight')
        if OutputDir != 'Temp': print('Graphics written to: ', FullPath)
    plt.close('all')

try:
    if __name__ == '__main__':
        start0 = time.time()
        KdePlot3(OutputMode = 'gui')
        end0 = time.time()
        print('Elapsed time:', format(end0 - start0, '.4g'), 'seconds' )


except Exception:
    import traceback
    print(traceback.format_exc())
```

Folding in Python works on code blocks which are defined by indentation. At the top of the file are the import statements, followed by a `def funcname(**kwargs)` statement, where "funcname" in this case is `KdePlot3`. The body of this function is the place where "the real work" is done.

This function also has two standardized parts (for Matplotlib graphic code examples), one at the beginning, which takes care of the keyword arguments and ensures that the 'Agg' backend is used unless one wants to display the graphics (this is necessary to ensure this function can be called from older versions of Libreoffice like 7.4); and another at the end ("# Start of output choices"), which makes sure that interactive use, output to the OutputMonitor folder, or output to another folder is possible in verious formats (like jpg, png, svg, pdf).

At the end of the file, the `try ... except` block makes sure that exceptions are dealt with properly, that the time for actually running the code (as opposed to the time required to load and initialize the imported libraries) is printed, and that we have the chance to call the function with a specific set of keyword arguments (in this case `OutputMode = 'gui'`).

Python files with this overall structure are well suited for calls from within spreadsheet functions.

```
  1
  2 <H1 Title="General assignments and conversions">
 17 <H1 Title="Functions with argument conversion">
 32 <H1 Title="Arithmetic operators with dreal">
 45 <H1 Title="Arithmetic operators with floats">
 57 <H1 Title="Arithmetic operators with (long) integers">
 70 <H1 Title="Arithmetic operators with (short) integers">
 81 <H1 Title="Arithmetic comparisons with dreal">
 98 <H1 Title="Arithmetic comparisons with floats">
114 <H1 Title="Arithmetic comparisons with (long) integers">
131 <H1 Title="Arithmetic comparisons with (short) integers">
147 <H1 Title="Assignments to matrices">
149
```

The output of the program is shown in the "Output" tab of the output panel after the program has finished running. Lengthy text output can be folded and unfolded, and the context menu allows to copy the output to the clipboard, clear the output, or save the output to a file.

```
Saturday, October 10, 2026 7:49:52 AM
Python executable: C:\Python313\python.exe
Python script: "C:\Users\DUHad\Documents\DataXlCalcNet\

Python script execution has started...
Program execution finished in 00:00:07.33
```

The "Log" tab of the output panel contains additional information after successfully running the program.



The snapshot above shows a code snippet which contains an error (`print` is misspelled as print2``)

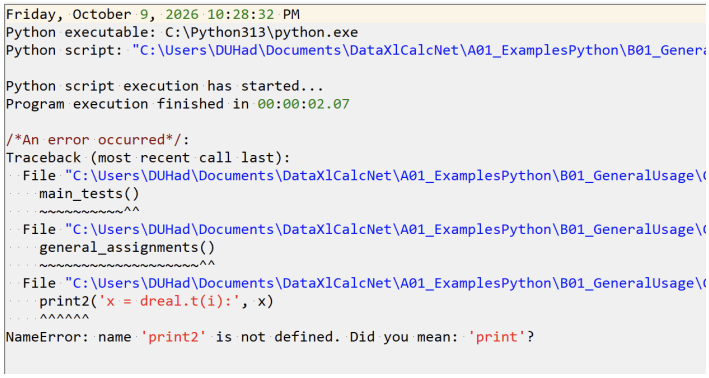

This error is detected by the Python interpreter, and is reported in the Log tab of the output panel.



After double-clicking in the Log tab on the first line in red color, the error is also indicated in the editor, with a full error message below the line where the error occured.

1.1.3.6 The CSharp development cycle in the Tiny IDE

Here we describe the C# development cycle in the Tiny IDE for producing `*.exe` files which are stored in the `AppData\Local\XlCalcNetIDE\Bin` folder, and which can be run immediately. The process for producing `*.dll` files which can be called from Python is similar but different, and is described *here*.

Overall, the C# development cycle in the Tiny IDE consists of the following steps: The file is opened in the editor panel, and the code is edited as needed. The code can be compiled by clicking on the "Run" button in the main menu bar. If there are any errors or warnings, they are shown in the "Log" tab of the output panel. When clicking on the error messages in the "Log" tab, they are also highlighted in the code. After correcting the errors, the "Run" button can be clicked again to compile the code. If there are no errors, the code is compiled into a `*.exe` file, which is stored in the `AppData\Local\XlCalcNetIDE\Bin` folder and which is executed automatically after successful compilation. Any text output of the program is shown in the "Output" tab of the output panel after the program has finished running.

These steps are illustrated in the following screenshots, which show the C# development cycle in the Tiny IDE for producing `*.exe` files:

```
 1
 2  #region Usings
 7
 8
 9  static class Program
10  {
11
12  public static void MainTests()
13  {
14      Console.WriteLine("Demo of some scplx functions");
15      ScplxTest0();
16      ScplxTest1();
17  }
18
19
20  #region ScplxTest0
39
40
41  #region ScplxTest1
60
61
62  /* This region contains the program entry point. Do not change */
63  #region Main
185
186
187 }
188
189  /* Do not remove. Do not add anything after this */
190 #region EOF
193
```

Directly after loading the C# code example, the code is folded, and the "Log" tab of the output panel is empty. The "Output" tab of the output panel is also empty, since the program has not been run yet.

Folding in C# works both on regions and on code blocks. Overall, the folding of regions is more important than the folding of code blocks, since it allows to hide the implementation of functions and classes, and to focus on the overall structure of the code. The folding of code blocks is useful for hiding the implementation of loops and conditional statements, and to focus on the overall structure of the code.

The screenshot above shows the overall structure of the C# code examples in XlCalcNet, which are organized into regions. The first region contains the using statements, followed (outside of any region) by a `static class Program` statement, and the first function in this class, which always has the form `public static void MainTests()`. The body of this function contains calls to the functions where "the real work" is done.

The implementations of these functions are located in the following regions (in this example the regions "ScplxTest0" and "ScplxTest1"), which are organized according to the functionality of the functions. The next region is called "Main", and contains the implementation of the `Main` function, which is the entry point of the program, and contains a lot of necessary boilerplate code, which makes sure that the program can run without a project file (which Visual Studio would require). The last region is called "EOF", and makes sure that code folding is working properly (adressing a small bug in the underlying ScintillaNet library). These last two regions should never be changed by the user during normal use.

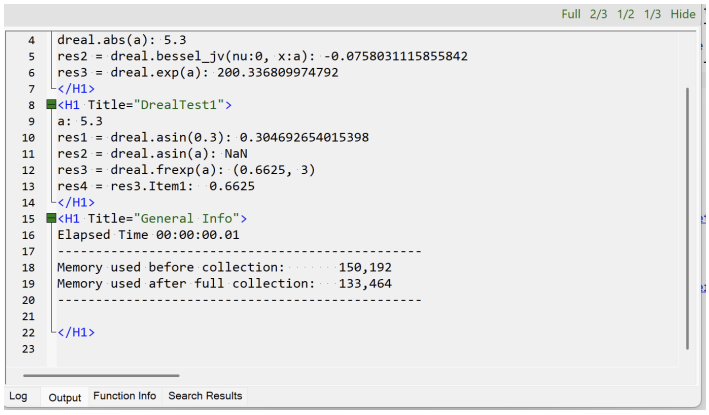

The output of the program is shown in the "Output" tab of the output panel after the program has finished running. The output can be folded and unfolded, and the context menu allows to copy the output to the clipboard, clear the output, or save the output to a file.

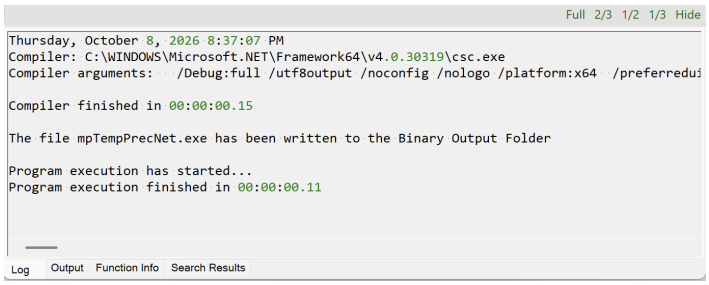

The "Log" tab of the output panel contains additional information after successfully compiling and running the program.



The snapshot above shows a code snippet which contains an error (the variable `res1` is defined twice)

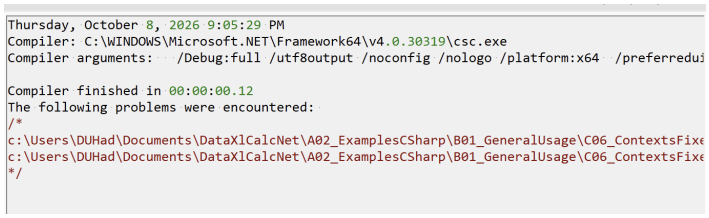

This error is detected by the compiler, and is reported in the Log tab of the output panel.

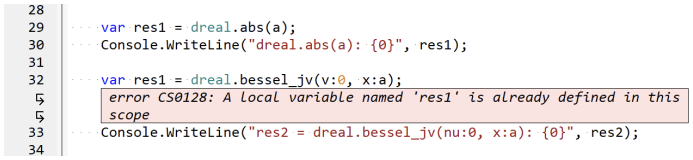

After double-clicking in the Log tab on the first line in red color, the error is also indicated in the editor, with a full error message below the line where the error occured.



Warnings are treated in a way similar to errors: in this case the program is compiled (in the absence of errors), but is not run. Instead the warning is shown in the Log tab, and after double-clicking on it the warning is also indicated in the editor, with a full error message below the line where the warning was triggered.

1.1.3.7 The Output tab in the Output Panel

Describe the toolbar on top of the Output tab.

Note that the Output tab in the Output Panel can be used to display any text output of a Python or C# program. The output can be folded and unfolded, and the context menu allows to copy the output to the clipboard, clear the output, or save the output to a file.

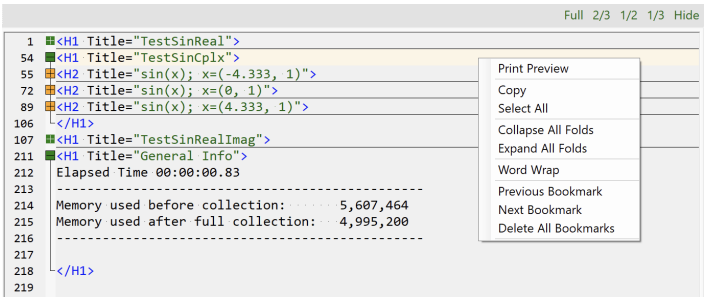

1.1.3.8 Source code

The Python source code for starting the IDE can be found here: https://github.com/duhadler/XlCalcNet/blob/master/xlcalcnet/ShowEditor.py

The C# source code for the IDE can be found here: https://github.com/duhadler/XlCalcNet/tree/master/xlcalcnet/Addin/NET48/Source/TinyEditor

1.1.4 Installing and using Numpy, Matplotlib, Pandas, Scipy, Seaborn, Statsmodels and Scikit-learn

1.1.4.1 Numpy

Numpy is "The fundamental package for scientific computing with Python". For more information, see https://numpy.org/ and https://en.wikipedia.org/wiki/NumPy.

Assuming that the Python batch files have been installed as described *here*, Numpy can be installed by double-clicking on the batch file `A04installnumpy.bat` in the `C:\Python313` folder.

The following example shows how Numpy can be used with the Decimal type to calculate the mean:

```
import numpy as np
from xlcalcnet import dpm

def demo_mp():
    r = 8
    c = 2
    dpm.dps = 30
    R = np.ndarray((r,c),dtype=dpm.realtype)
    d1 = dpm.t(1.0)
    for i in range(r):
        for j in range(c):
            R[i,j] = 10*(i+1) + d1/(j+7)
    print(R)
    print()
    res = np.mean(R)
    print("res = np.mean(R): \n", res, type(res))
    print()
    res = np.mean(R, axis=0)
    print("res = np.mean(R, axis=0): \n", res, type(res))
    print()
    res = np.mean(R, axis=1)
    print("res = np.mean(R, axis=1): \n", res, type(res))

def demo_all():
    demo_mp()

demo_all()
```

The output looks like this:

```
[[Decimal('10.1428571428571428571428571429') Decimal('10.125')]
 [Decimal('20.1428571428571428571428571429') Decimal('20.125')]
 [Decimal('30.1428571428571428571428571429') Decimal('30.125')]
 [Decimal('40.1428571428571428571428571429') Decimal('40.125')]
 [Decimal('50.1428571428571428571428571429') Decimal('50.125')]
 [Decimal('60.1428571428571428571428571429') Decimal('60.125')]
 [Decimal('70.1428571428571428571428571429') Decimal('70.125')]
 [Decimal('80.1428571428571428571428571429') Decimal('80.125')]]

res = np.mean(R):
 45.133928571428571428571428571 <class 'decimal.Decimal'>

res = np.mean(R, axis=0):
 [Decimal('45.142857142857142857142857143') Decimal('45.125')] <class 'numpy.ndarray'>

res = np.mean(R, axis=1):
 [Decimal('10.133928571428571428571428571')
 Decimal('20.133928571428571428571428571')
 Decimal('30.133928571428571428571428571')
 Decimal('40.133928571428571428571428571')
 Decimal('50.133928571428571428571428571')
 Decimal('60.133928571428571428571428571')
```

(continues on next page)

(continued from previous page)

```
Decimal('70.133928571428571428571428571')
Decimal('80.133928571428571428571428571')] <class 'numpy.ndarray'>
```

1.1.4.2 Matplotlib

Matplotlib is "a comprehensive library for creating static, animated, and interactive visualizations in Python". For more information, see https://matplotlib.org/ and https://en.wikipedia.org/wiki/Matplotlib.

Assuming that the Python batch files have been installed as described *here*, Matplotlib can be installed by double-clicking on the batch file `A05installmatplotlib.bat` in the `C:\Python313` folder.

The following example shows how Matplotlib can be used to produce a boxplot. This code example shows how parameters can be passed:

The Python code for the example below can also be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04b_Matplotlib3D.py.

```
from xlcalcnet import gui
import os, re
import numpy as np
import mpl_toolkits.mplot3d.axes3d as axes3d
import matplotlib.pyplot as plt

def ProjectFilledContour(**kwargs):
    OutputDir = kwargs['OutputDir'] if 'OutputDir' in kwargs else 'OutputMonitor'
    Title = kwargs['Title'] if 'Title' in kwargs else 'ProjectFilledContour'
    PlotStyle = kwargs['PlotStyle'] if 'PlotStyle' in kwargs else 'default'
    OutputMode = kwargs['OutputMode'] if 'OutputMode' in kwargs else 'gui'
    FigSizeX = float(kwargs['FigSizeX']) if 'FigSizeX' in kwargs else 4
    FigSizeY = float(kwargs['FigSizeY']) if 'FigSizeY' in kwargs else 4
    Resolution = int(kwargs['Resolution']) if 'Resolution' in kwargs else 300
# End of standard key word arguments

    plt.style.use(PlotStyle)

    fig = plt.figure()
    ax = fig.add_subplot(projection='3d')
    X, Y, Z = axes3d.get_test_data(0.05)

    # Plot the 3D surface
    ax.plot_surface(X, Y, Z, edgecolor='royalblue', lw=0.5, rstride=8, cstride=8,
                    alpha=0.3)

    # Plot projections of the contours for each dimension.  By choosing offsets
    # that match the appropriate axes limits, the projected contours will sit on
    # the 'walls' of the graph
    ax.contourf(X, Y, Z, zdir='z', offset=-100, cmap='coolwarm')
    ax.contourf(X, Y, Z, zdir='x', offset=-40, cmap='coolwarm')
    ax.contourf(X, Y, Z, zdir='y', offset=40, cmap='coolwarm')

    ax.set(xlim=(-40, 40), ylim=(-40, 40), zlim=(-100, 100),
           xlabel='X', ylabel='Y', zlabel='Z')
    fig.tight_layout()

# Start of output choices
    if (OutputMode == 'gui'):
        gui.plot(fig, __file__, Title)
    else:
        FName = 'Temp'
        if OutputDir != 'Temp': FName = re.sub('[^a-zA-Z0-9]', '', Title)
        LocalDir = gui.get_local_appdata_xlcalcnet()
        FullPath = os.sep.join([LocalDir, OutputDir, FName])
        plt.savefig(FullPath + '.' + OutputMode,  bbox_inches='tight')
    plt.close('all')

try:
    if __name__ == '__main__':
        ProjectFilledContour()
```

(continues on next page)

(continued from previous page)

```
except Exception:
    import traceback
    print(traceback.format_exc())
```

This produces the following output:

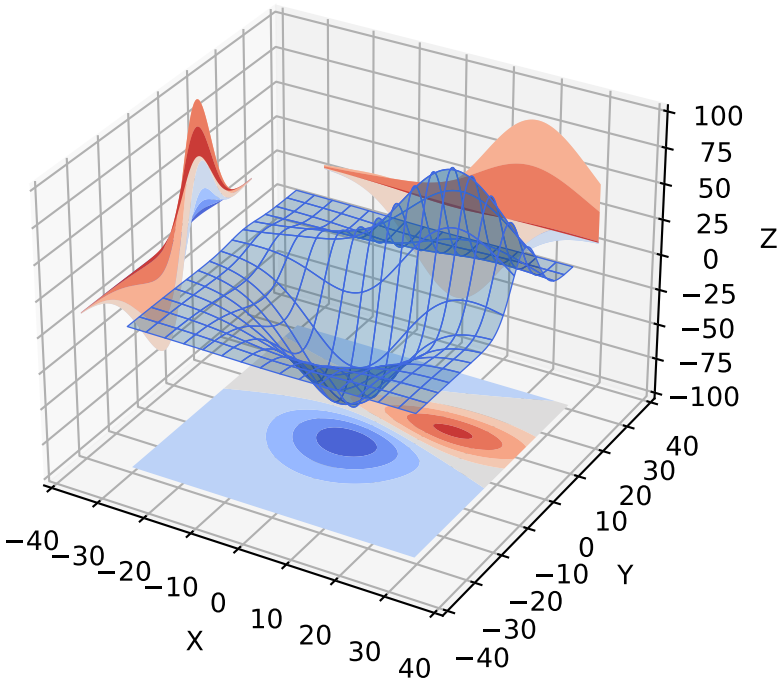

1.1.4.3 Pandas

Pandas is "a fast, powerful, flexible and easy to use open source data analysis and manipulation tool, built on top of the Python programming language". For more information, see https://pandas.pydata.org/ and https://en.wikipedia.org/wiki/Pandas_(software)

Assuming that the Python batch files have been installed as described *here*, Pandas can be installed by double-clicking on the batch file `A06installpandas.bat` in the `C:\Python313` folder.

The following example shows how Pandas can be used to access data in an Excel workbook:

```
import time
import pandas as pd

def main_tests():
    get_irisdata()

def get_documents_folder():
    """Returns the documents folder."""
    import ctypes, ctypes.wintypes
    buf = ctypes.create_unicode_buffer(ctypes.wintypes.MAX_PATH)
    ctypes.windll.shell32.SHGetFolderPathW(None, 0x0005, None, 0, buf)
    return str(buf.value)

def get_irisdata():
    fn = get_documents_folder()
    fn += r'\DataXlCalcNet\DataExamples\MainExamples\Workbooks\Datasets.xlsx'
    datasets = pd.ExcelFile(fn)
    df = pd.read_excel(datasets, 'iris')
    print(df)
    print(df.head(8))
    print(df.dtypes)

try:
    if __name__ == '__main__':
        start0 = time.time()
        main_tests()
        end0 = time.time()
        print('Elapsed time:', format(end0 - start0, '.4g'), 'seconds' )

except Exception:
    import traceback
    print(traceback.format_exc())
```

The output looks like this:

```
     Sepal.Length  Sepal.Width  Petal.Length  Petal.Width    Species
0             5.1          3.5           1.4          0.2     setosa
1             4.9          3.0           1.4          0.2     setosa
2             4.7          3.2           1.3          0.2     setosa
3             4.6          3.1           1.5          0.2     setosa
4             5.0          3.6           1.4          0.2     setosa
..            ...          ...           ...          ...        ...
145           6.7          3.0           5.2          2.3  virginica
146           6.3          2.5           5.0          1.9  virginica
147           6.5          3.0           5.2          2.0  virginica
148           6.2          3.4           5.4          2.3  virginica
149           5.9          3.0           5.1          1.8  virginica

[150 rows x 5 columns]
   Sepal.Length  Sepal.Width  Petal.Length  Petal.Width Species
0           5.1          3.5           1.4          0.2  setosa
1           4.9          3.0           1.4          0.2  setosa
2           4.7          3.2           1.3          0.2  setosa
3           4.6          3.1           1.5          0.2  setosa
4           5.0          3.6           1.4          0.2  setosa
5           5.4          3.9           1.7          0.4  setosa
```

(continues on next page)

(continued from previous page)

```
6           4.6          3.4           1.4          0.3  setosa
7           5.0          3.4           1.5          0.2  setosa
Sepal.Length    float64
Sepal.Width     float64
Petal.Length    float64
Petal.Width     float64
Species          object
dtype: object
Elapsed time: 0.4529 seconds
```

1.1.4.4 Scipy

Scipy is "a fast, powerful, flexible and easy to use open source data analysis and manipulation tool, built on top of the Python programming language". For more information, see https://scipy.org/ and https://en.wikipedia.org/wiki/SciPy.

Assuming that the Python batch files have been installed as described *here*, Scipy can be installed by double-clicking on the batch file `A07installscipy.bat` in the `C:\Python313` folder.

The following example shows how Scipy can be used for fitting data:

```
import numpy as np
import matplotlib.pyplot as plt
from scipy.optimize import curve_fit

def func(x, a, b, c):
    return a * np.exp(-b * x) + c

def test_curvefit():
    # See https://docs.scipy.org/doc/scipy/reference/generated/scipy.optimize.curve_fit.html
    print('Hello from test_curvefit!')

    xdata = np.linspace(0, 4, 50)
    y = func(xdata, 2.5, 1.3, 0.5)
    rng = np.random.default_rng()
    y_noise = 0.2 * rng.normal(size=xdata.size)
    ydata = y + y_noise
    plt.plot(xdata, ydata, 'b-', label='data')

    popt, pcov = curve_fit(func, xdata, ydata)
    print(popt)
    plt.plot(xdata, func(xdata, *popt), 'r-',
             label='fit: a=%5.3f, b=%5.3f, c=%5.3f' % tuple(popt))

    popt, pcov = curve_fit(func, xdata, ydata, bounds=(0, [3., 1., 0.5]))
    print(popt)
    plt.plot(xdata, func(xdata, *popt), 'g--',
             label='fit: a=%5.3f, b=%5.3f, c=%5.3f' % tuple(popt))

    plt.xlabel('x')
    plt.ylabel('y')
    plt.legend()
    plt.show()

try:
    print()
    test_curvefit()

except Exception:
    import traceback
    print(traceback.format_exc())
```

This produces the following output:

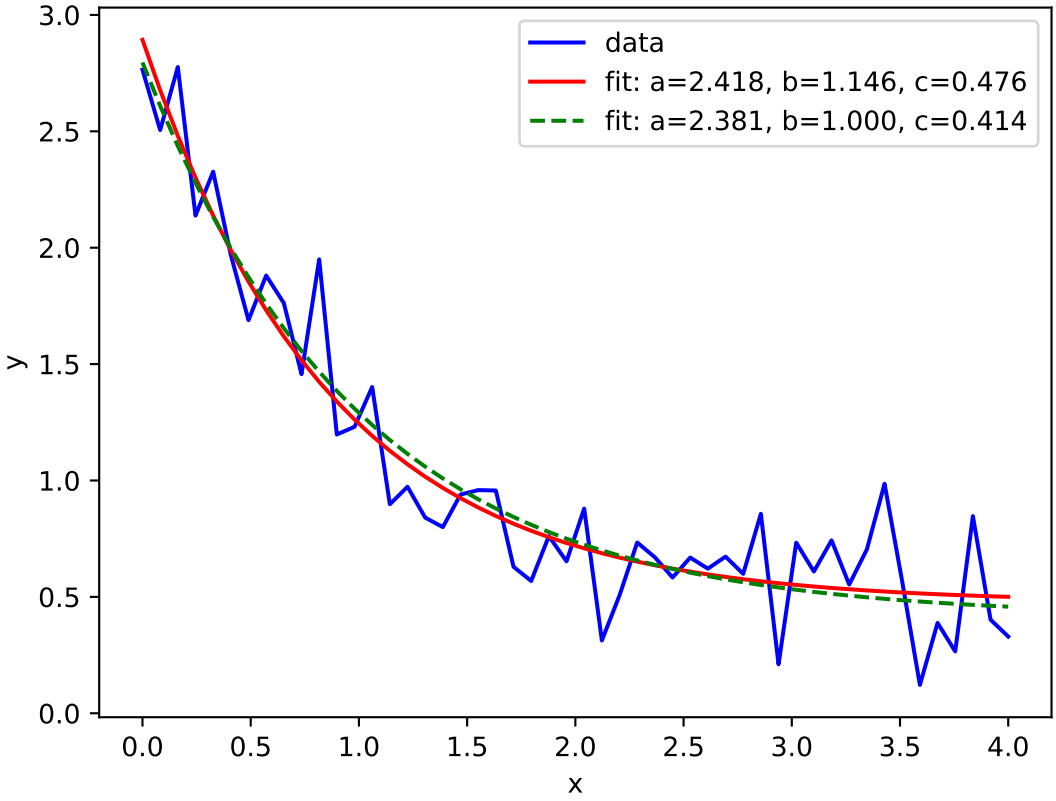
data
fit: a=2.418, b=1.146, c=0.476
fit: a=2.381, b=1.000, c=0.414
y
x
0.0
0.5
1.0
1.5
2.0
2.5
3.0
3.5
4.0

1.1.4.5 Seaborn

Seaborn is "a Python data visualization library based on matplotlib. It provides a high-level interface for drawing attractive and informative statistical graphics". For more information, see https://seaborn.pydata.org/.

Assuming that the Python batch files have been installed as described *here*, Seaborn can be installed by double-clicking on the batch file `A08installseaborn.bat` in the `C:\Python313` folder.

The following example shows how Seaborn can be used to produce a scatterplot matrix:

```
from xlcalcnet import gui
from pathlib import Path
import os
import seaborn as sns
import matplotlib.pyplot as plt

# See also: https://seaborn.pydata.org/examples/scatterplot_matrix.html

def ScatterplotMatrix(**kwargs):
    OutputDir = kwargs['OutputDir'] if 'OutputDir' in kwargs else 'OutputMonitor'
    Title = kwargs['Title'] if 'Title' in kwargs else 'ScatterplotMatrix'
    PlotStyle = kwargs['PlotStyle'] if 'PlotStyle' in kwargs else 'default'
    OutputMode = kwargs['OutputMode'] if 'OutputMode' in kwargs else 'svg'
    FigSizeX = float(kwargs['FigSizeX']) if 'FigSizeX' in kwargs else 4
    FigSizeY = float(kwargs['FigSizeY']) if 'FigSizeY' in kwargs else 4
    Resolution = int(kwargs['Resolution']) if 'Resolution' in kwargs else 300
# End of standard key word arguments

    plt.style.use(PlotStyle)

    sns.set_theme(style='ticks')
    df = sns.load_dataset('penguins')
    sns.pairplot(df, hue='species')
    fig = plt.gcf()

# Start of output choices
    if (OutputMode == 'plt'):
        plt.show()
    elif (OutputMode == 'gui'):
        gui.plot(fig, __file__, Title)
    else:
        FName = 'Temp'
        if OutputDir != 'Temp': FName = (Path(__file__).stem)
        LocalDir = gui.get_local_appdata_xlcalcnet()
        FullPath = os.sep.join([LocalDir, OutputDir, FName + '.' + OutputMode])
        plt.savefig(FullPath,  bbox_inches='tight')
        if OutputDir != 'Temp': print('Graphics written to: ', FullPath)
    plt.close('all')

try:
    if __name__ == '__main__':
        ScatterplotMatrix(OutputMode='gui')

except Exception:
    import traceback
    print(traceback.format_exc())
```

This produces the following output:

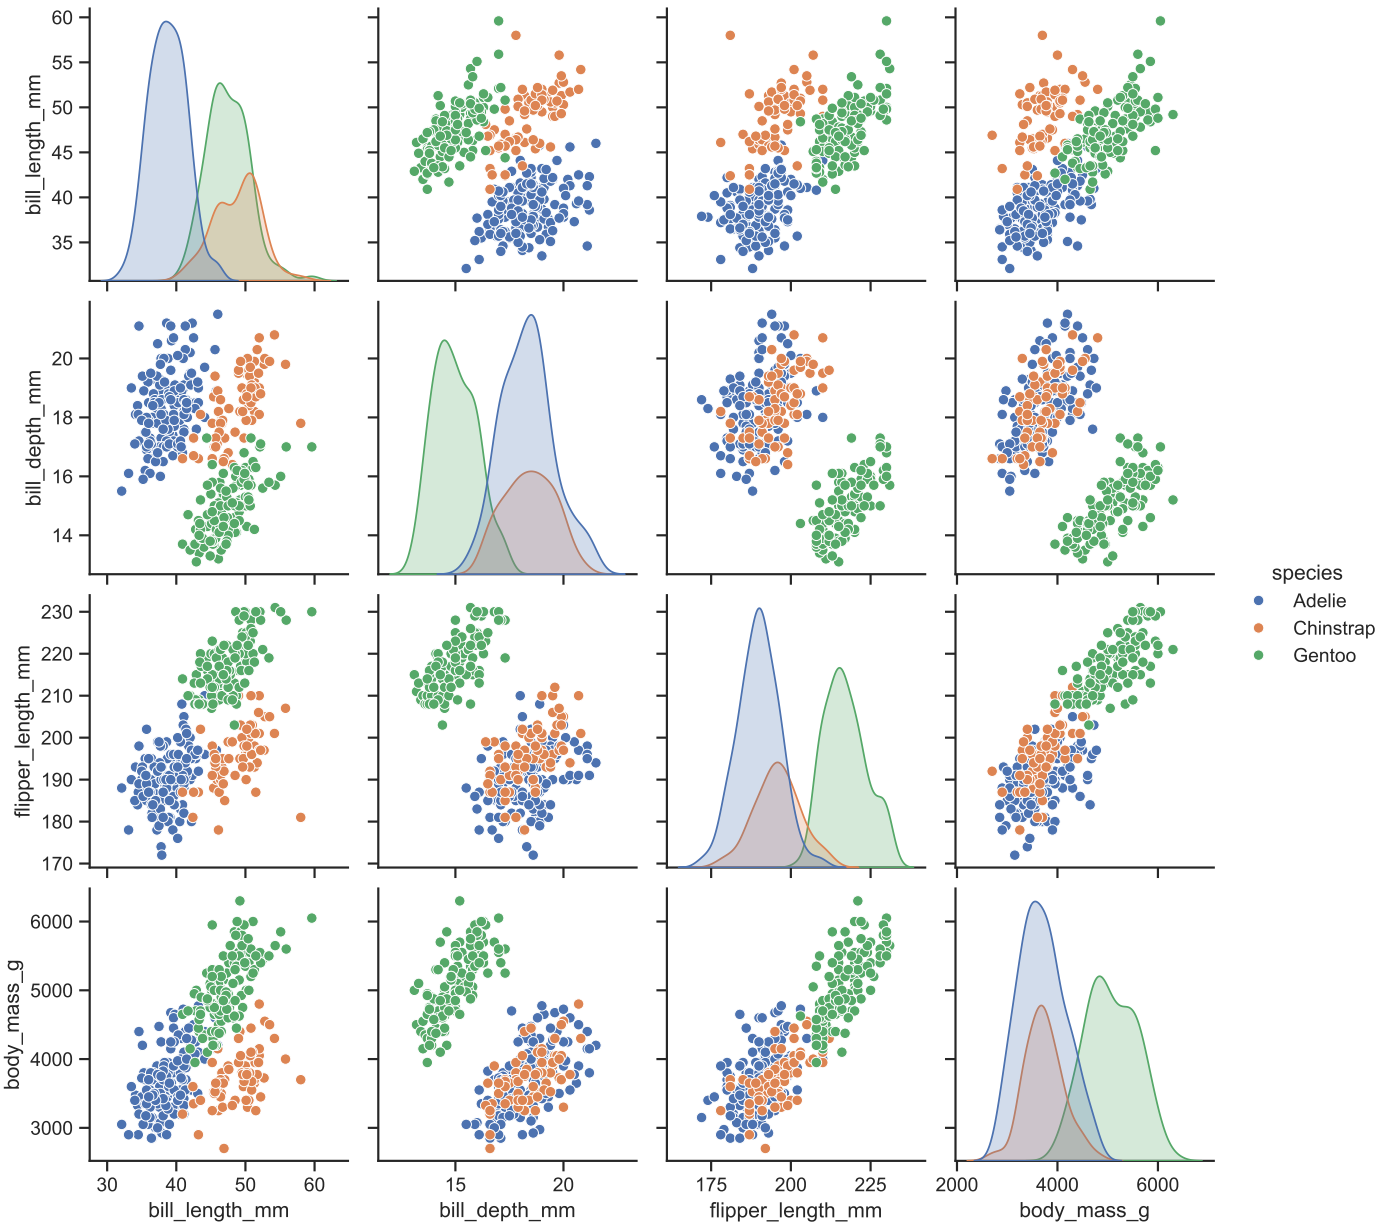
bill_length_mm
bill_depth_mm
flipper_length_mm
body_mass_g
species
Adelie
Chinstrap
Gentoo

1.1.4.6 Statsmodels

Statsmodels is a Python package for statistical computations. For more information, see https://www.statsmodels.org/stable/index.html.

Assuming that the Python batch files have been installed as described *here*, Statsmodels can be installed by double-clicking on the batch file `A09installstatsmodels.bat` in the `C:\Python313` folder.

The following example shows how Statsmodels can be used for ordinary least squares calculations:

```
import time
import numpy as np
import pandas as pd
import statsmodels.api as sm

# See also: https://www.statsmodels.org/stable/examples/notebooks/generated/ols.html


def OLS(**kwargs):

# End of standard key word arguments

    nsample = 100
    x = np.linspace(0, 10, 100)
    X = np.column_stack((x, x**2))
    beta = np.array([1, 0.1, 10])
    e = np.random.normal(size=nsample)

    X = sm.add_constant(X)
    y = np.dot(X, beta) + e

    model = sm.OLS(y, X)
    results = model.fit()
    print(results.summary())


try:
    if __name__ == '__main__':
        start0 = time.time()
        OLS()
        end0 = time.time()
        print('Elapsed time:', format(end0 - start0, '.4g'), 'seconds' )

except Exception:
    import traceback
    print(traceback.format_exc())
```

The output looks like this

```
                            OLS Regression Results
==============================================================================
Dep. Variable:                      y   R-squared:                       1.000
Model:                            OLS   Adj. R-squared:                  1.000
Method:                 Least Squares   F-statistic:                4.027e+06
Date:                Sun, 11 Oct 2026   Prob (F-statistic):          2.61e-239
Time:                        08:43:02   Log-Likelihood:                -146.41
No. Observations:                 100   AIC:                             298.8
Df Residuals:                      97   BIC:                             306.6
Df Model:                           2
Covariance Type:            nonrobust
==============================================================================
                 coef    std err          t      P>|t|      [0.025      0.975]
------------------------------------------------------------------------------
const          1.6938      0.312      5.422      0.000       1.074       2.314
x1            -0.1856      0.144     -1.286      0.202      -0.472       0.101
x2            10.0215      0.014    717.320      0.000       9.994      10.049
```

(continues on next page)

(continued from previous page)

```
==============================================================================
Omnibus:                        2.046   Durbin-Watson:                   2.207
Prob(Omnibus):                  0.359   Jarque-Bera (JB):                1.489
Skew:                          -0.065   Prob(JB):                        0.475
Kurtosis:                       2.416   Cond. No.                         144.
==============================================================================

Notes:
[1] Standard Errors assume that the covariance matrix of the errors is correctly specified.
Elapsed time: 0.005406 seconds
```

1.1.4.7 Scikit-learn

Scikit-learn is a Python package for machine learning. For more information, see https://scikit-learn.org/stable/index.html.

Assuming that the Python batch files have been installed as described *here*, Scikit-learn can be installed by double-clicking on the batch file `A10install_scikit_learn.bat` in the `C:\Python313` folder.

The following example shows how Scikit-learn can be used for a Principal Component Analysis (PCA) on the Iris dataset.:

```
from xlcalcnet import gui
from pathlib import Path
import os, time
import numpy as np
from sklearn.decomposition import PCA

# see https://scikit-learn.org/stable/auto_examples/decomposition/plot_pca_iris.html

def PlotPCA(**kwargs):
    OutputDir = kwargs['OutputDir'] if 'OutputDir' in kwargs else 'OutputMonitor'
    Title = kwargs['Title'] if 'Title' in kwargs else 'First three principal components'
    PlotStyle = kwargs['PlotStyle'] if 'PlotStyle' in kwargs else 'default'
    OutputMode = kwargs['OutputMode'] if 'OutputMode' in kwargs else 'svg'
    FigSizeX = float(kwargs['FigSizeX']) if 'FigSizeX' in kwargs else 8
    FigSizeY = float(kwargs['FigSizeY']) if 'FigSizeY' in kwargs else 6
    Resolution = int(kwargs['Resolution']) if 'Resolution' in kwargs else 300
# End of standard key word arguments

    # Choose 'Agg' as backend unless we want to display the graphics
    if (OutputMode != 'gui'):
        import matplotlib
        matplotlib.use('Agg')
    import matplotlib.pyplot as plt
    plt.style.use(PlotStyle)

    from sklearn.datasets import load_iris
    iris = load_iris(as_frame=True)
    #print(iris.keys())
    fig = plt.figure(1, figsize=(FigSizeX, FigSizeY))
    ax = fig.add_subplot(111, projection='3d', elev=-150, azim=110)

    X_reduced = PCA(n_components=3).fit_transform(iris.data)
    scatter = ax.scatter(
        X_reduced[:, 0],
        X_reduced[:, 1],
        X_reduced[:, 2],
        c=iris.target,
        s=40,
    )
    ax.set(
        title=Title,
        xlabel='1st Principal Component',
        ylabel='2nd Principal Component',
        zlabel='3rd Principal Component',
    )
    ax.xaxis.set_ticklabels([])
    ax.yaxis.set_ticklabels([])
    ax.zaxis.set_ticklabels([])

    # Add a legend
    legend1 = ax.legend(
        scatter.legend_elements()[0],
        iris.target_names.tolist(),
        loc='upper right',
        title='Classes',
    )
    ax.add_artist(legend1)
```

(continues on next page)

(continued from previous page)

```
# Start of output choices
    if (OutputMode == 'plt'):
        plt.show()
    elif (OutputMode == 'gui'):
        gui.plot(fig, __file__, Title)
    else:
        FName = 'Temp'
        if OutputDir != 'Temp': FName = (Path(__file__).stem)
        LocalDir = gui.get_local_appdata_xlcalcnet()
        FullPath = os.sep.join([LocalDir, OutputDir, FName + '.' + OutputMode])
        plt.savefig(FullPath,  bbox_inches='tight')
        if OutputDir != 'Temp': print('Graphics written to: ', FullPath)
    plt.close('all')

try:
    if __name__ == '__main__':
        start0 = time.time()
        PlotPCA(OutputMode = 'gui')
        end0 = time.time()
        print('Elapsed time:', format(end0 - start0, '.4g'), 'seconds' )

except Exception:
    import traceback
    print(traceback.format_exc())
```

The output looks like this:

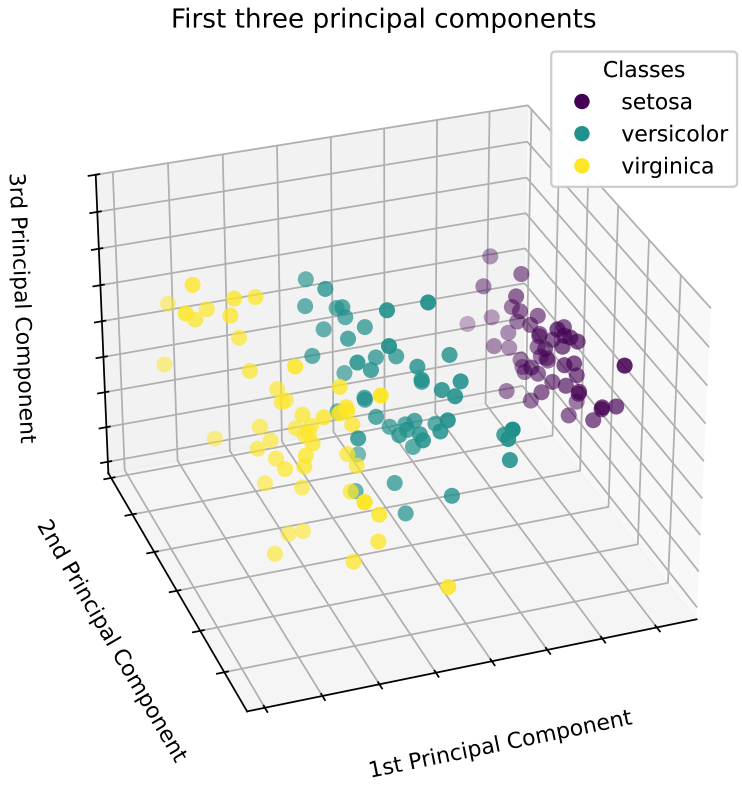

1.1.5 Calling Python from C:#: socket server vs in-process calls

A running socket server is critical for the use of XlCalcNet from Microsoft Excel.

When starting the socket server for the first time from a specific installation of python.exe, a dialog will appear to allow access of this version of Python to networks.

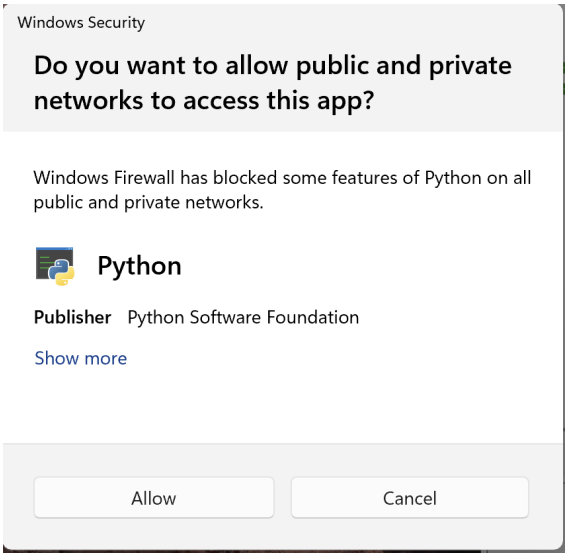

Confirm, since this is required for the socket server to work properly. If you have multiple installations of Python, you may have to do this for each installation.

The socketserver is started from the TinyIDE: in the main menu, click on `Tools` -> `Start SocketServer`.

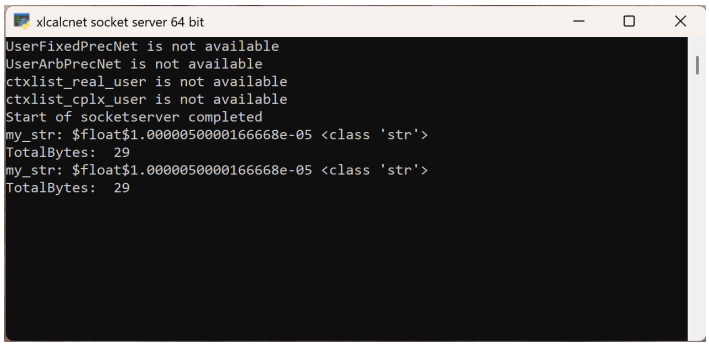

1.1.5.1 Calling the socketserver from C#

The full C# source code of the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05a_CallSocketServer.cs.

The following example illustrates the use:

```
#region Usings
using MpFunLabClient;
using System;
using System.Diagnostics;
using System.Globalization;
using System.Threading;
using System.Numerics;
using FixedPrecNet;
#endregion
```

(continues on next page)

(continued from previous page)

```
static class Program
{

public static void MainTests()
{
    Console.WriteLine("Demo of call socket server");
    for (int i = 0; i < 1; i++)
        TestSocketServer();
}

public static void TestSocketServer()
{
    Console.WriteLine("Hello TestSocketServer!");
    bool Transpose = false;
    bool ShowShape = true;

    string Code2 = "from A01_ExamplesPython.B18_FunctionsAndCurvesPlots.C02_BasicCurves import D02_Circle;";
    Code2 += "D02_Circle.CircleXY(); result = 'Done'";

    dynamic ResultFinal = MpFunLabSocketClientClass.CallSocketServer0(Code2, Transpose, ShowShape);
    Console.WriteLine();
    Console.WriteLine("Returned:");
    Console.WriteLine("{0}, {1}", ResultFinal.ToString(), ResultFinal.GetType());

    try
    {
        int U0 = ResultFinal.GetUpperBound(0);
        int U1 = ResultFinal.GetUpperBound(1);
        Console.WriteLine("U0: {0}, U1: {1}", U0, U1);
        for (int i = 0; i <= U0; i++)
        {
            for (int j = 0; j <= U1; j++)
            {
                Console.WriteLine("{0}, {1}", ResultFinal[i, j], ResultFinal[i, j].GetType());
            }
        }
    }
    catch (Exception)
    {
    }
    Console.WriteLine();
}
```

The Python source code for the socketserver itself can be found here: https://github.com/duhadler/XlCalcNet/blob/master/xlcalcnet/Addin/NET48/Bin/socketspy.py

The C# source code for the socket client which is called by the above program can be found here: https://github.com/duhadler/XlCalcNet/tree/master/xlcalcnet/Addin/NET48/Source/ClientServer

1.1.5.2 Calling Python from C# in-process

With Pythonnet, it is possible to call python from C# in-process. For the purposes of XlCalcNet this method is slower than calling the socket server. However, in other use cases, it might be the preferred method.

The full C# source code of the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05b_TestPythonNet.cs.

The following example illustrates the use. Note that this requires including a `using Python.Runtime;` statement (line 6), passing the full path of the Python root directory(line 61), the Python DLL path (line 62) and setting a number of environment variables (lines 87-90). The Python engine must be initialized before any Python code can be executed (line 22):

```
1 #region Usings
2 using System;
```

(continues on next page)

(continued from previous page)

```
using System.Collections.Generic;
using System.Numerics;
using FixedPrecNet;
using Python.Runtime;
#endregion

static class Program
{

public static void MainTests()
{
    TestPythonNet0();
}

#region TestPythonNet0

public static void TestPythonNet0()
{
    Console.WriteLine("Hello TestPythonNet1");
    PythonEngine.Initialize();
    using (Py.GIL())
    {
        dynamic np = Py.Import("numpy");
        Console.WriteLine(np.cos(np.pi * 2));

        dynamic sin = np.sin;
        Console.WriteLine(sin(5));

        double c = (double)(np.cos(5) + sin(5));
        Console.WriteLine(c);

        dynamic a = np.array(new List<float> { 1, 2, 3 });
        Console.WriteLine(a.dtype);

        dynamic b = np.array(new List<float> { 6, 5, 4 }, dtype: np.int32);
        Console.WriteLine(b.dtype);

        Console.WriteLine(a * b);
    }
}

#endregion



/* This region contains the program entry point. Do not change */
#region Main

public static void Main(string[] args)
{
    if (args.Length < 2)
    {
        Console.WriteLine(
            "This application needs to be started with 2 arguments;");
        Console.WriteLine("See the manual of xlcalcnet for details.");
    }
    else
    {
        _PythonRootDir = args[0];
        _PythonNetPyDll = args[1];
        _LocalAppDataDir = Environment.GetFolderPath(Environment.SpecialFolder
            .LocalApplicationData);
        AppDomain currentDomain = AppDomain.CurrentDomain;
        currentDomain.AssemblyResolve +=
            new ResolveEventHandler(LoadFromXlCalcNet);
        currentDomain.AssemblyResolve +=
```

(continues on next page)

(continued from previous page)

```
            new ResolveEventHandler(LoadFromXlCalcNet2);
        currentDomain.AssemblyResolve +=
            new ResolveEventHandler(LoadFromPythonNet);
        currentDomain.AssemblyResolve +=
            new ResolveEventHandler(LoadFromAppLocal);
        System.Threading.Thread.CurrentThread.CurrentCulture =
            new System.Globalization.CultureInfo("en-US");
        System.Threading.Thread.CurrentThread.CurrentUICulture =
            new System.Globalization.CultureInfo("en-US");
        var ci = (System.Globalization.CultureInfo)System.Threading.Thread
            .CurrentThread.CurrentCulture.Clone();
        ci.NumberFormat.NegativeInfinitySymbol = "-Inf";
        ci.NumberFormat.PositiveInfinitySymbol = "+Inf";
        System.Threading.Thread.CurrentThread.CurrentCulture = ci;
        var stopWatch = new System.Diagnostics.Stopwatch();
        stopWatch.Start();
        try
        {
            Environment.SetEnvironmentVariable("PYTHONHOME", _PythonRootDir);
            Environment.SetEnvironmentVariable("PYTHONPATH", _PythonRootDir);
            Environment.SetEnvironmentVariable("PYTHONNET_PYDLL",
                _PythonNetPyDll);
            MainTests();
        }
        catch (Exception Ex)
        {
            Console.Error.WriteLine(Ex.Message);
            Console.Error.WriteLine("$+$");
            Console.Error.WriteLine(Ex.StackTrace);
            Console.Error.WriteLine("$+$");
        }
        stopWatch.Stop();
        var ts = stopWatch.Elapsed;
        string elapsedTime = string.Format("{0:00}:{1:00}:{2:00}.{3:00}",
            ts.Hours, ts.Minutes, ts.Seconds, ts.Milliseconds / 10);
        Console.WriteLine("<H1 Title=" + "\"" + "General Info" + "\"" + ">");
        Console.WriteLine("Elapsed Time " + elapsedTime);
        Console.WriteLine("------------------------------------------------");
        Console.WriteLine("Memory used before collection:       {0:N0}",
            GC.GetTotalMemory(false));
        GC.Collect();
        Console.WriteLine("Memory used after full collection:   {0:N0}",
            GC.GetTotalMemory(true));
        Console.WriteLine("------------------------------------------------");
        Console.WriteLine("");
        Console.WriteLine("</H1>");
    }

}

private static string _PythonRootDir;
private static string _PythonNetPyDll;
private static string _LocalAppDataDir;

/*
    The code for LoadFromXlCalcNet, LoadFromXlCalcNet2, LoadFromPythonNet
    and LoadFromAppLocal is not shown here
*/


#endregion


}
```

Running the program produces the following output:

```
Hello TestPythonNet1
1.0
-0.9589242746631385
-0.675262089199912
float64
int32
[ 6. 10. 12.]
<H1 Title="General Info">
Elapsed Time 00:00:00.58
-------------------------------------------------
Memory used before collection:       5,854,328
Memory used after full collection:   1,431,368
-------------------------------------------------

</H1>
```

In other words, it took about 0.58 seconds to run the program. This is much slower than calling the socket server, which takes about 0.02 seconds. The reason for this is that Pythonnet has to load the entire Python interpreter into the C# process, which takes a lot of time and memory. In contrast, the socket server runs in a separate process and can be started once and then used for multiple calls from C#.

1.1.6 Reasons for using multiprecision arithmetic

An introduction to the problems of rounding errors and catastrophic cancellation can be found in Goldberg [349]. Excellent reference texts are Higham [368] and Higham [369].

In the following sections we will give a few examples of how the use of double precision without special precaution can give wrong results.

Example: Sums

Sums are often calculated exactly if all summands have an exact representation. If this is not the case, results can be unpredictable. In MS Excel, the formula

```
=SUM(10000000000,-16000000000,6000000000)
```

will give the correct result 0, but the analogous formula

```
=SUM(1E+40,-1.6E+40,6E+39)
```

returns $1.20893E+24$ instead of the correct result 0.

Example: Standard Deviation

Like sums, variances and standard deviations are often calculated exactly if all arguments have an exact representation. If this is not the case, results can again be unpredictable. In MS Excel, the formula

```
=VAR(1E+30,1E+30,1E+30)
```

returns $2.97106E+28$ instead of the correct result 0, which should be the obvious results since all arguments are the same.

Example: Overflow and underflow

In many situations where the final result is representable in double precision, some of the interim results cause overflow or underflow. A popular example is the function $f(x,y) = \sqrt{x^2+y^2}$. With $x = 3 \cdot 10^{300}$ and $y = 4 \cdot 10^{300}$ the result $f(x,y) = 5 \cdot 10^{300}$ is representable in double precision, but the (naive) calculation will overflow.

Example: Polynomials

Consider the following example from Cuyt *et al.* [190]:

For $a = 77617$ and $b = 33096$, calculate

$$Y = 333.75b^6 + a^2(11a^2b^2 - b^6 - 121b^4 - 2) + 5.5b^8 + \frac{a}{2b}$$

The correct result is $Y = -54767/66192 = -8.27396\ldots \cdot 10^{-1}$

Example: Trigonometric Functions

Trigonometric functions are sensitive to small perturbations.

In double precision and binary floating point arithmetic, the tangent of $x = 1.57079632679489$ is calculated as $\tan(x) = 1.48752 \cdot 10^{14}$, whereas the correct result is $\tan(x) = 1.51075 \cdot 10^{14}$. This amounts to an absolute error of $2.32287 \cdot 10^{12}$ and a relative error of 1.54%.

There are also limits on the range of arguments, e.g. $\sin(10^8)$ returns the value $-9.31639 \cdot 10^{-1}$ (with an relative error of $-6.22776 \cdot 10^{-13}$), whereas $\sin(10^9)$ returns an invalid result (the exact result is $5.45843 \cdot 10^{-1}$)

Example: Logarithms and Exponential Functions

Consider the following example from Kaveh R. Ghazi and Vincent Lefèvre and Philippe Théveny and Paul Zimmermann [1496]:

Determine 10 decimal digits of the constant

$$Y = 173746a + 94228b - 78487c, \quad \text{where}$$

$$a = \sin(10^{22}), b = \log(17.1), c = \exp(0.42).$$

The expected result is $Y = -1.341818958 \cdot 10^{-12}$.

Example: Linear Algebra

The following example is from W. Hofschuster and W. Krämer [1497]:

We want to solve the (ill-conditioned) system of linear equations $Ax = b$ with

$$A = \begin{pmatrix} a_{11} & a_{12} \\ a_{21} & a_{22} \end{pmatrix} = \begin{pmatrix} 64919121 & -159018721 \\ 41869520.5 & -102558961 \end{pmatrix}, b = \begin{pmatrix} b_1 \\ b_2 \end{pmatrix} = \begin{pmatrix} 1 \\ 0 \end{pmatrix}, x = \begin{pmatrix} x_1 \\ x_2 \end{pmatrix}$$

The correct solution is $x_1 = 205117922$, $x_2 = 83739041$.

To solve this 2×2 system numerically we first use the well known formulas

$$x_1 = \frac{a_{22}}{a_{11}a_{22} - a_{12}a_{21}}, \quad x_2 = \frac{-a_{21}}{a_{11}a_{22} - a_{12}a_{21}},$$

Calculating this directly in double precision gives the following wrong result:

$x_1 = 102558961$, $x_2 = 41869520.5$

Example: Eigenvalues

The following example is from Brown *et al.* [161]:

The behaviour and stability of many physical systems are connected with the spectral properties of non-self-adjoint operators. However, numerical approximations of eigenvalues of non-selfadjoint operators (even matrices) may fail dramatically. For example, the non-normal 7×7 matrix

$$A = \begin{pmatrix} 289 & 2054 & 326 & 128 & 70 & 32 & 6 \\ 1152 & 30 & 1312 & 512 & 288 & 128 & 32 \\ -29 & -1990 & 766 & 384 & 1018 & 224 & 58 \\ 512 & 128 & 640 & 0 & 640 & 512 & 128 \\ 1053 & 2246 & -514 & -384 & -766 & 800 & 198 \\ -287 & -6 & 1722 & -128 & 1978 & -30 & -2042 \\ -2176 & -285 & -1563 & -512 & -539 & -1152 & -287 \end{pmatrix}$$

has the eigenvalues $-2, -4, 0, 1, 1, 2, 4$. Calculations in double precision yield a set of complex eigenvalues, such as $8.57 \pm 3.73i; 2.29 \pm 8.33i; -5.43 \pm 6.56i; -8.85$ with imaginary parts as large as 8.33, which are nowhere near the true eigenvalues. The reason for this is that owing to the nonnormality of the matrix, its eigenvalues are highly sensitive to perturbations, and therefore unavoidable rounding errors render the numerical eigenvalue computations unreliable.

1.1.7 Rebuilding the .dll files of XlCalcNet and XlCalcNet2 from source code

The XlCalcNet and XlCalcNet2 python packages contain both precompiled .dll files and their source code.

This section descibes how to rebuild the .dll files of XlCalcNet and XlCalcNet2 from source code, either completely or only in part. The building process itself is not particularly difficult, but it requires the installation of MSYS2 (version 3.4.9.x86_64 or later: about 4 GB in size), Free Pascal (version 2.6.4 or later: about 320 MB in size), and Visual Studio Community (version 2019 or later: about 4.6 GB in size).

In the following it is assumed that the user has installed MSYS2, Free Pascal and Visual Studio Community and is comfortable using them.

MSYS2 is required to build the file `FixedPrecGCC64K8.dll` in the XlCalcNet `Bin` folder. The details of the building process are described in *FixedPrec*.

MSYS2 is also required to build the file `ArbPrecNetGCCK8.dll` in the XlCalcNet2 `Bin` folder. The details of the building process are described in *ArbPrec*.

Free Pascal is required to build the file `libwe64d.dll` in the XlCalcNet `Bin` folder. The details of the building process are described in *FixedPrec*.

Erverything else can be done in Visual Studio Community:

The details of building the file `FixedPrecNet.dll` in the XlCalcNet `Bin` folder are described in *FixedPrec*.

The details of building the file `ArbPrecNet.dll` in the XlCalcNet2 `Bin` folder are described in *ArbPrec*.

The details of building the files `MpFunLabClient.dll` and `MpFunLabAddin64.dll` in the XlCalcNet `Bin` folder are described in *ClientServer*.

The details of building the file `TinyOutputMonitorUserCtrl.dll` in the XlCalcNet `Bin` folder are described in *OutputMonitor*.

The details of building the file `TinyIDEUserCtrl.dll` and `FindReplaceSD.dll` in the XlCalcNet `Bin` folder are described in *TinyIde*.

The details of building the file `TinyPlot2DUserCtrl.dll` in the XlCalcNet `Bin` folder are described in *GalleryOfPlots*.

The details of building the file `TinyPlot3DUserCtrl.dll` in the XlCalcNet `Bin` folder are described in *Wpf3D*.

The details of building the file `TinyDataViewerUserCtrl.dll` in the XlCalcNet `Bin` folder are described in *DataViewer*.

All other .dll files in the XlCalcNet `Bin` folder have been aquired via https://www.nuget.org/ from the supporting libraries and should probably not be changed.

1.2 Using XlCalcNet within MS Excel

Compared to Microsofts "Python in Excel" (see https://support.microsoft.com/en-us/excel/python/introduction-to-python-in-excel), the following features of XlCalcNet can be highlighted:

- Everything is open source and can be modified by the user.
- The user can use any (locally installed) Python version from 3.8 to 3.15, and any Python package, including packages which are not supported by Microsoft.
- MS Excel 2010 - 2024 are supported.
- Everything stays local. No data and no code leave the computer of the user. An internet connection is not necessary.
- Using Python.NET, code written in C# can also be used from Python, and therefore from MS Excel.
- The user can use any Python IDE, including the Tiny IDE which is part of XlCalcNet.
- The user can write functions of arbitrary length and complexity in Python using an external editor, and call them in a short Python script in a spreadsheet cell.
- Such functions can also be called as procedures from VBA.
- There is extensive support for calculations in multiprecision, including arbitrary precision.

1.2.1 Preparing MS Excel for using XlCalcNet

Important

Before beginning to install the MS Excel addins, make sure that the socket server is up and running as expected (see the section above). When calling a function, which calls the socket server, for the first time, MS Excel will seem to freeze if the socket server does not respond quickly. However, subsequent calls will return quickly when the socket server is not up and running (there seems to be a learning effect).

To enable the use of XlCalcNet in MS Excel, two add-ins need to be installed: the first, named `Mpfunlablocal.xlam`, contains functions written in Visual Basic for Applications (VBA), including functions populating the XlCalcNet Navigator dialog, and is intended to be modified by the user during normal use. This add-in is located in a subfolder of the `DataXlCalcNet` folder in the `Documents` folder: `DataXlCalcNet\SpreadsheetAddins\MSExcel`.

The second, named `Mpfunlab.xll`, contains the functionality behind the spreadsheet functions `CPY_0` - `CPY_9` and `ASDOUBLE` and the XlCalcNet Navigator dialog container. The files comprising the whole add-in (`Mpfunlab.xll`, `ExcelDna.Integration.dll`, `MpFunLabAddin64.dll`, `MpFunLabClient.dll`, `MpFunLab.Dna`) have been compiled using Visual Studio and are NOT intended to be modified by the user during normal use. This add-in is located in the `Bin` folder in the `XlCalcNet` package: `PathToPython\Lib\site-packages\xlcalcnet\Addin\NET48\Bin`, where `PathToPython` is the path to the Python installation (in our example `C:\Python313`).

1.2.1.1 Installing Mpfunlablocal.xlam and Mpfunlab.xll

To install these two add-ins properly, follow these steps:

Again, make sure that the socket server is up and running.

Within MS Excel, on an Excel worksheet, open the Add-ins dialog from the main menu/ribbon: `Developer -> Excel Add-ins`. In the Add-ins dialog, click on `Browse...` and in the `Documents` folder navigate to the folder `DataXlCalcNet\SpreadsheetAddins\MSExcel`. Double-click on `Mpfunlablocal.xlam`, which will then appear in the Add-ins dialog under "Add-ins available". Still in the Add-ins dialog, click on `Browse...` again, and navigate to the folder `PathToPython\Lib\site-packages\xlcalcnet\Addin\NET48\Bin` (see above). Double-click on `Mpfunlab.xll`, which will then appear in the Add-ins dialog under "Add-ins available". Still in the Add-ins dialog, click on `OK`. Exit MS Excel.

When starting MS Excel the next time, both add-ins will be loaded.

1.2.2 Using the Python standard library functions within spreadsheet formulas

> **Note**
>
> In the following subsections, we will work with the file `XlDemoCPYstd.xlsx`, which contains examples for using the Python standard library. More advanced examples using Numpy, Matplotlib, Pandas, Scipy, Seaborn and XlCalcNet start *here*, and examples for using dynamic arrays in MS Excel with XlCalcNet start *here*.

Within MS Excel, open from the main menu `File -> Open` in the Documents folder the MS Excel workbook `DataXlCalcNet\DataExamples\MainExamples\Workbooks\XlDemoCPYstd.xlsx`.

This file contains several worksheets which demonstrate different possibilities of using the Python standard library within MS Excel spreadsheet formulas.

Before we start with that we will briefly explore the use of these functions with the Function Dialog of MS Excel: In the worksheet "Math", select cell `B12` and click on the icon of the Function Dialog in the Formula Bar. This opens the Function Dialog:

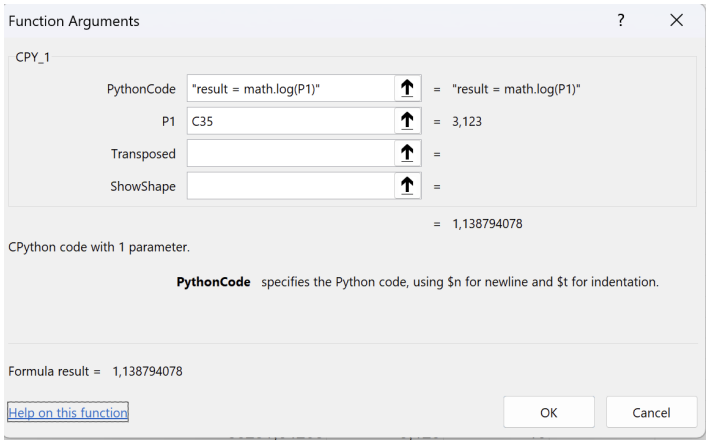

We see that the formula in the spreadsheeet cell is `=CPY_1("result = math.ceil(P1)",C12)`. The function `CPY_1` has a required string parameter, `Formula`, which contains a Python script. This python script can contain several Python statement. The last statement is always expected to assign a value to the variable result, in this case a Python float, which is coverted to a floating point number in double precision (a "Double") in LibreOffice. The next optional parameter, `Param1`, can be a string, a Double, a Boolean value or a reference. In this case, it is a reference (`C12`) which points to a Double with the value `3.123`. This optional parameter, `Param1`, is referenced in the Python formula given above as `P1`. The last but one parameter, `Transposed`, and the last parameter, `ShowShape`, are only relevant when arrays are returned; this is discussed *here*.

In the worksheet "Math", select an emptz cell and click on the icon of the Function Dialog in the Formula Bar. This opens the Function Insert Dialog:

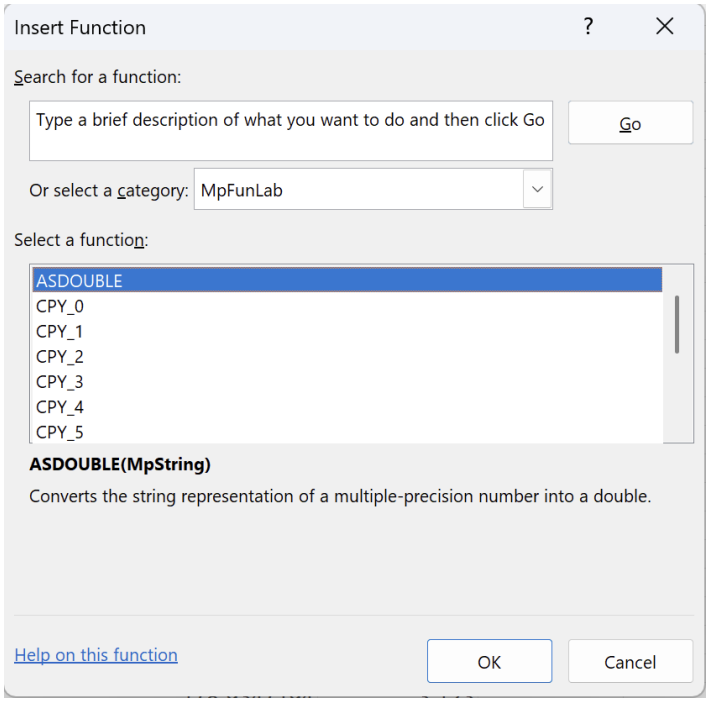

We see that the function `CPY_1` is in the Category "MpFunLab", and that there are 10 functions, `CPY_0` to `CPY_9`, which differ only by the number of parameters `Param1` to `Param9` which they support (The function `CPY_0` does not have a parameter `Param0`). There is also a function `ASDOUBLE`, which is used to convert string representations of a Python Fraction or Decimal into a Double; this is discussed *here*.

1.2.2.1 The worksheet "GeneralInfo"

The worksheet "GeneralInfo" contains calls to the Python modules `os`, `platform` and `sys`.

For example, the cell `B4` contains the formula `=CPY_0("result = platform.processor()")`. The function result depends on the hardware, e.g. `Intel64 Family 6 Model 165 Stepping 5, GenuineIntel`.

The cell `B16` contains the formula `=CPY_0("result = os.getcwd()")`. The function result depends on the LibreOffice installation, e.g. `C:\Program Files\LibreOffice\program`.

The cell `B33` contains the formula `=CPY_0("result = str(sys.float_info.epsilon)")`, which return the machine epsilon in double precision. The function result is: `2.220446049250313e-16`.

1.2.2.2 The worksheet "Math"

The worksheet "Math" demonstrates the use of the Python module `math` and the use of parameters in functions.

For example, the cell `B33` contains the formula `=CPY_1("result = math.exp(P1)-1",C33)`, which calculates $\exp(\mathrm{P1})-1$ naively. The function result is `1.00000500000696E-05`, with the cell `C33` containing the value `0.00001`.

The cell `B34` contains the formula `=CPY_1("result = math.expm1(P1)",C34)`, which calculates $\exp(\mathrm{P1}) - 1$ using the `expm1` function. The function result is `1.00000500001667E-05`, with the cell `C34` again containing the value `0.00001`.

The floating point values `NaN`, `+inf` and `-inf` are not supported in spreadsheet programs, which only return `#NUM!` in these cases. Use the string representation instead. This is shown in the cells `A4:B9` on this worksheet.

The cell `B36` contains the formula `=CPY_2("result = math.log(P1, P2)",C36, D36)`, with the cell `C36` containing the value `3.123` and the cell `D36` containing the value `10`. The function result is: `0.494571984230199`.

1.2.2.3 The worksheet "Arrays"

The worksheet "Arrays" demonstrates the use of arrays in functions. The Python equivalent of arrays are lists.

For example, the cell `B3` contains the formula `=CPY_0("result = str(sys.path)")`. The function `sys.path` returns a list of strings (containing the entries of the Python path), which is converted into one string by writing `str(sys.path)`. This makes sure that the result can be displayed in one cell, but the result string is quite long and hard to read.

We can use an array formula to improve readability. We recall that in addition to the usual parameters `P1` - `P9` in the functions `CPY_0` to `CPY_9` there are two more: The last but one paramter, named `Transposed`, which is optional with default value 0, where a non-zero value means that the returned array should be transposed; and the last paramter, named `ShowShape`, which is optional with default value 0, where a non-zero value means that the shape of the returned array should be indicated like `R7C3` for an array with 7 rows and 3 columns.

As an example, the cell `B6` contains the formula `=CPY_0("result = sys.path",1,1)` and returns the shape information `R12C1` followed by the separator `|`, followed by the first entry of the transposed array, i.e. in this case `R12xC1| C:\Users\DUHad\Documents\DataXlCalcNet`.

We can build the corresponding array formula by first selecting a range like `R12C1`, then typing in the input line of the formula bar `=CPY_0("result = sys.path",1,0)`, and finally, while keeping the shift and control keys pressed down, pressing the enter key.

This is what has been done in cells `B9:B20`. The formula is now displayed as `{=CPY_0("result = sys.path",1,0)}`, with curly braces, to indicate that it is an array formula. We can change the range which is covered by the array formula by dragging the small blue rectangle in the lower right corner in the selected range (see the screenshot below).

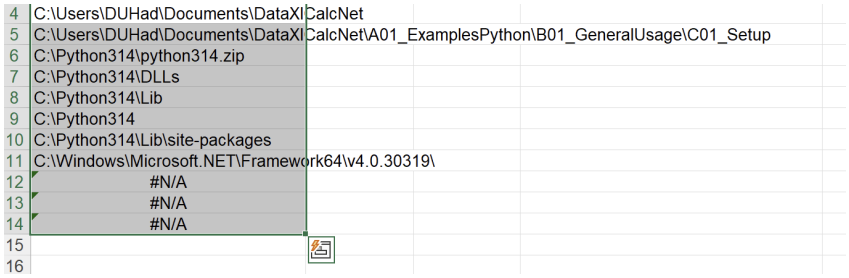

1.2.2.4 The worksheet "Data"

The worksheet "Data " demonstrates the use of named ranges in MS Excel spreadsheet formulas.

Currently there a two small datasets with predefined as named ranges: `matA` defined as the range $Data.$A$3:$A$7 and `matB` defined as the range $Data.$A$3:$A$7.

These ranges are used in the workbook "Arrays".

1.2.3 Using Numpy, Matplotlib, Pandas, Scipy, Seaborn and XlCalcNet within spreadsheet formulas

> **Note**
>
> In the following subsections we will work with the file `XlDemoCPYadv.xlsx`, which contains more advanced examples using Numpy, Matplotlib, Pandas, Scipy, Seaborn and XlCalcNet. Examples for using MS Excel with the Python standard library start *here*, and an example of using dynamic arrays in MS Excel starts *here*.

Within MS Excel, open from the main menu `File -> Open` in the Documents folder the MS Excel workbook `DataXlCalcNet\DataExamples\MainExamples\Workbooks\XlDemoCPYadv.xlsx`.

This file contains several worksheets which demonstrate different possibilities of using Numpy, Matplotlib, Pandas, Scipy, Seaborn and XlCalcNet within MS Excel spreadsheet formulas.

Some of these functions write their output into the `XlCalcNetIDE\OutputMonitor` folder in the AppDataLocal folder. In order to see it, we need to open the `Output Monitor` application: start the `Tiny IDE` by clicking on its icon in the task bar, and in the main menu, click on `Tools` -> `Start Output Monitor`.

1.2.3.1 The worksheet "FractionsInput"

The worksheet "FractionsInput " demonstrates the use of the Python data type `Fraction` in MS Excel spreadsheet formulas.

MpInputFractions | 123456789012345678 / 901234567890

	A	B	C	D
1				
2		**Formatted as Double**		**Original Data**
3		1,36986300138694E+05		123456789012345678 / 901234567890
4		9,99999999900000E-12		123456789 / 01234567890123456789O
5		2,17395555782604E-03		12345678901234 / 5678901234567890
6		1,38696253953018E+03		12345678901234567 / 8901234567890
7		5,26315809944599E+11		123456789012345678901 / 234567890
8		1,56470034579900E+01		1234567890123456 / 78901234567890
9		3,57142968723526E-07		123456789012 / 345678901234567890
10		2,17395603043452E+17		12345678901234567890123 4 / 567890
11		1,81847937116985E-01		123456789012345 / 678901234567890
12				
13				
14	**Prod:**	4,80254411022073E+17		109488241064252366394927246517420416158540118291
15	**Sum:**	2,17396129359400E+17		488482060215448878927010156598583291789961336561
16				
17	**Median:**	1,56470034579900E+01		29394473574368/1878600823045
18	**Average:**	2,41551254843778E+16		488482060215448878927010156598583291789961336561
19	**Mean:**	2,41551254843778E+16		488482060215448878927010156598583291789961336561
20	**Variance:**	4,66773527093429E+33		190890738689300151179994589724145861287222206851
21				
22	**Min:**	9,99999999900000E-12		1/100000000010
23	**Max:**	2,17395603043452E+17		617283945061728394506 17/283945
24				

If we try to enter a number like `123456789012345678/901234567890`, i.e. a number with more than 16 digits into a spreadsheet cell, it will automatically be shortened to `1.23456789012346E+029`. In order to be able to enter such numbers into spreadsheet cells, the cells must first be formatted as text, and thereafter these numbers can be entered as text. This is mostly useful when working with Python Fractions and Decimals.

However, this kind of input is hard to read; it is also not directly usable for numerical spreadsheet functions. This can be changed by using the function `ASDOUBLE`, a shown in column `B`

As an example, worksheet "FractionsInput" contains a named range called "MpInputFractions" in column `A`, which can be used as input for descriptive statistics or linear algebra routines.

The module `npm` of XlCalcNet can be used to calculate desciptive statistics, like `prod`, `sum`, `mean`, `median`, `variance` with fractions. The function `npm.mean` can be called from a spreadsheet cell as follows:

```
=CPY_1("from xlcalcnet import npm, qpm $n x = npm.array(P1, dtype=qpm); result=str(npm.prod(x))",MpInputFractions)
```

Às before, we are using `$n` for newline and `$t` for indentation. The result is itself a `Fraction` (converted to a string), and is exact. The corresponding Python code with conventional formatting would look like this (where `P1` is the input range):

```
from xlcalcnet import npm, qpm
x = npm.array(P1, dtype=qpm)
result=str(npm.prod(x))
```

Note that the input range is converted into a Numpy array with data type `qpm`, which is the data type for rational numbers in XlCalcNet. The result is then converted into a string, so that it can be displayed in a spreadsheet cell.

Since the string output is quite long, we can use `result=float(npm.prod(x))` instead of `result=str(npm.prod(x))` to get a floating point number in double precision, which is more readable. However, this will not be exact anymore.

1.2.3.2 The worksheet "DecimalsInput"

The worksheet "DecimalsInput " demonstrates the use of the Python data type `Decimal` in MS Excel spreadsheet formulas.

MpInputDecimals | 123456789012345678.901234567890

	A	B	C	D	E
1					
2	**Dps:**	50			
3					
4		**Formatted as Double**		**Original Data**	
5		1,23456789012346E+17		123456789012345678.901234567890	
6		1,23456789012346E+08		123456789.012345678901234567890	
7		1,23456789012346E+15		1234567890123456.78901234567890	
8		1,23456789012346E+13		12345678901234.5678901234567890	
9		1,23456789012346E+20		1234567890123456789012.34567890	
10		1,23456789012346E+15		1234567890123456.78901234567890	
11		1,23456789012346E+11		123456789012.34567890123456789	
12		1,23456789012346E+23		12345678901234567890123.4567890	
13		1,23456789012346E+14		123456789012345.678901234567890	
14					
15					
16	**Prod:**	6,66246276571616E+136		6.66246276571615849418609358097213134465746545108 69E+136	
17	**Sum:**	1,23580371863209E+23		123580371863208865332109.886533087408281457890	
18					
19	**Median:**	1,23456789012346E+15		1234567890123456.78901234567890	
20	**Average:**	1,37311524292454E+22		1373115242924542948 1.542948120823142384210	
21	**Mean:**	1,37311524292454E+22		1373115242924542948 1.542948120823142384210	
22	**Variance:**	1,50496589683514E+45		150496589683514229980943223153006330220129796 7.884	
23					
24	**Min:**	1,23456789012346E+08		123456789.012345678901234567890	
25	**Max:**	1,23456789012346E+23		123456789012345678901234.567890	
26					

If we try to enter a number like `123456789012345678.901234567890`, i.e. a number with more than 16 digits into a spreadsheet cell, it will automatically be shortened to `1.23456789012346E+017`. In order to be able to enter such numbers into spreadsheet cells, the cells must first be formatted as text, and thereafter these numbers can be entered as text. This is mostly useful when working with Python Fractions and Decimals.

However, this kind of input is hard to read; it is also not directly usable for numerical spreadsheet functions. This can be changed by using the function `ASDOUBLE`, a shown in column `B`

As an example, worksheet "DecimalsInput" contains a named range called "MpInputDecimals" in column `C`, which can be used as input for descriptive statistics or linear algebra routines.

The module `npm` of XlCalcNet can be used to calculate desciptive statistics, like `prod`, `sum`, `mean`, `median`, `variance` with decimals. The function `npm.mean` can be called from a spreadsheet cell as follows:

```
=CPY_2("from xlcalcnet import npm, dpm $n dpm.dps=int(P2); x = npm.array(P1, dtype=dpm); result=str(npm.mean(x))",
↪MpInputDecimals, $B$2)
```

Às before, we are using `$n` for newline and `$t` for indentation. The result is itself a `Decimal` (converted to a string), and is correct to the number of digits specified. The corresponding Python code with conventional formatting would look like this (where `P1` is the input range and `P2` is the number of digits):

```
from xlcalcnet import npm, dpm
dpm.dps=int(P2)
x = npm.array(P1, dtype=dpm)
result=str(npm.mean(x))
```

Note that the input range is converted into a Numpy array with data type `dpm`, which is the data type for decimal numbers in XlCalcNet. The result is then converted into a string, so that it can be displayed in a spreadsheet cell.

Since the string output is quite long, we can use `result=float(npm.prod(x))` instead of `result=str(npm.prod(x))` to get a floating point number in double precision, which is more readable. However, this will then be correct only to the precision of a double-precision floating-point number.

1.2.3.3 The worksheet "Programming"

The worksheet "Programming" demonstrates the use of small python scripts in MS Excel spreadsheet formulas.

	A	B	C	D
1				
2				
3	**Python standard library: simple loop**			
4	**n:**	45		
5	**Result:**	1980		
6				
7				
8				
9				
10	**Scipy: Numerical quadrature; f(x) = a*x**2 + b**			
11	**Lower limit of integration:**	-1,4		
12	**Upper limit of integration:**	1,5		
13	**Parameter a:**	2,1		
14	**Parameter b:**	1,1		
15	**Result (integral, error estimate):**	(7.473300000000001, 8.297029729931183e-14)		
16				
17				

The first example in this worksheeet shows how to program a simple loop. The formula in the cell `B4`. is

```
=CPY_1("temp = 0 $n for i in range(int(P1)): $n$t temp += i $n result = 2 * temp", B4)
```

The cell `B4` contains the value `45`; the result is `1980`. The corresponding Python code with conventional formatting would look like this(where `P1` is `n`, the number of iterations):

```
temp = 0
for i in range(int(P1)):
    temp += i
result = 2 * temp
```

The second example in this worksheet shows how to perform numerical integration.The formula in the cell `B15`. is

```
=CPY_4("from scipy.integrate import quad $n def integrand(x, a, b): return a*x**2 + b $n a = float(P3); b = float(P4);  $n I␣
↪= quad(integrand, float(P1), float(P2), args=(a,b))  $n result = str(I) ", B11, B12, B13, B14)
```

This formula calls the function `quad` from the module `scipy.integrate` in the package `scipy`. The parameters of this function are taken from the cells `B11` to `B14`. The result is a tuple containing the intergral and an error estimate. The corresponding Python code with conventional formatting would look like this (with P1 is the lower limit of integration, P2 is the upper limit, P3 is the coefficient of x^2, and P4 is the constant term):

```
from scipy.integrate import quad
def integrand(x, a, b): return a*x**2 + b
a = float(P3); b = float(P4)
I = quad(integrand, float(P1), float(P2), args=(a,b))
result = str(I)
```

The cells B16 to B17 show the same result as an array formula, with B16 containing the integral and B17 the error estimate.

1.2.3.4 The worksheet "OutputMonitorCSV"

This is a snapshot of the worksheet "OutputMonitorCSV" with the relevant formula in cell B1. The output of the formula in cell B1 is a CSV file named TTest1External.csv which is written to the Output Monitor folder. The Output Monitor application must be running in order to see the output. The Output Monitor can be started from the main menu of the Tiny IDE by clicking on Tools -> Start Output Monitor.

	A	B	C	D	E	F	G	H
1	**Python Script:**	Students t-test, 1 sample						
2								
3	**n:**	[10, 20, 30]						
4	**mu0:**	1.0						
5	**mean:**	[4.5,4.7]						
6	**std:**	[1,2,3,4]						
7	**alpha:**	0.05						
8	**Options:**	,I=True, D=True, T=True, C=True, Onesided=True, Twosided = True, OutputMode='csv'						
9								
10								
11								
12	**Note:**	The result is written to the Output Monitor folder (start the Output Monitor application first!)						
13								

The formula in the cell B1. is

```
=CPY_0(TEXTJOIN(" ",1,"from A06_UserlibExamplesPython.B29_InferentialStatistics.C01_BasicTests1Sample import D01_StudentT_
↪PValues $n importlib.reload(D01_StudentT_PValues) $n D01_StudentT_PValues.stats_student_t_1sample_test(n=",B3,", mu0=",B4,
↪", mean=",B5,", std=",B6,", alpha=", B7, B8, ")"," $n result='Students t-test, 1 sample'"))
```

This formula calls the function stats_student_t_1sample_test from the module D01_StudentT_PValues in the package A06_UserlibExamplesPython.B29_InferentialStatistics.C01_BasicTests1Sample. The parameters of this function are taken from the cells B3 to B8. The result is a CSV file named TTest1External.csv which is written to the Output Monitor folder. The corresponding Python code with conventional formatting and substitution of the referenced cell values would look like this:

```
from A06_UserlibExamplesPython.B29_InferentialStatistics.C01_BasicTests1Sample import D01_StudentT_PValues
importlib.reload(D01_StudentT_PValues)
D01_StudentT_PValues.stats_student_t_1sample_test(n=[10, 20, 30], mu0=1.0, mean=[4.5,4.7], std=[1,2,3,14], alpha=0.015,␣
↪I=True, D=True, T=True, C=True, Onesided=True, Twosided=True, OutputMode='csv')
result='Students t-test, 1 sample'
```

Note

Here we are using importlib.reload to make sure that any changes in the code of the module D01_StudentT_PValues which may have occured since the last use of this spreadsheet function become effective without restarting the Python interpreter.

The cell A3 contains ="n:", and the cell B3 contains ="[10, 20, 30]". This passes the list [10, 20, 30] as the parameter n to the function stats_student_t_1sample_test.

The cell A4 contains ="mu0:", and the cell B4 contains ="1.0". This passes the value 1.0 as the parameter mu0 to the function stats_student_t_1sample_test.

The cell A5 contains ="mean:", and the cell B5 contains ="[4.5,4.7]". This passes the list [4.5,4.7] as the parameter mean to the function stats_student_t_1sample_test.

The cell A6 contains ="std:", and the cell B6 contains ="[1,2,3,14]". This passes the list [1,2,3,14] as the parameter std to the function stats_student_t_1sample_test.

The cell A7 contains ="alpha:", and the cell B7 contains ="0.015". This passes the value 0.015 as the parameter alpha to the function stats_student_t_1sample_test.

The cell A8 contains ="Options:", and the cell B8 contains =",I=True, D=True, T=True, C=True, Onesided=True, Twosided = True, OutputMode='csv'". This passes the options I=True, D=True, T=True, C=True, Onesided=True, Twosided = True, OutputMode='csv' as keyword arguments to the function stats_student_t_1sample_test.

And this is the Output Monitor showing the result (with the project panel hidden)

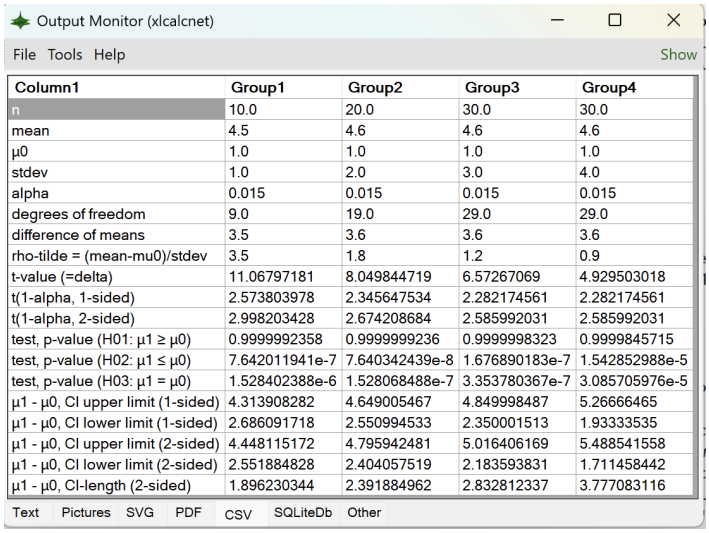

Column1	Group1	Group2	Group3	Group4
n	10.0	20.0	30.0	30.0
mean	4.5	4.6	4.6	4.6
μ0	1.0	1.0	1.0	1.0
stdev	1.0	2.0	3.0	4.0
alpha	0.015	0.015	0.015	0.015
degrees of freedom	9.0	19.0	29.0	29.0
difference of means	3.5	3.6	3.6	3.6
rho-tilde = (mean-mu0)/stdev	3.5	1.8	1.2	0.9
t-value (=delta)	11.06797181	8.049844719	6.57267069	4.929503018
t(1-alpha, 1-sided)	2.573803978	2.345647534	2.282174561	2.282174561
t(1-alpha, 2-sided)	2.998203428	2.674208684	2.585992031	2.585992031
test, p-value (H01: μ1 ≥ μ0)	0.9999992358	0.9999999236	0.9999998323	0.9999845715
test, p-value (H02: μ1 ≤ μ0)	7.642011941e-7	7.640342439e-8	1.676890183e-7	1.542852988e-5
test, p-value (H03: μ1 = μ0)	1.528402388e-6	1.528068488e-7	3.353780367e-7	3.085705976e-5
μ1 - μ0, CI upper limit (1-sided)	4.313908282	4.649005467	4.849998487	5.26666465
μ1 - μ0, CI lower limit (1-sided)	2.686091718	2.550994533	2.350001513	1.93333535
μ1 - μ0, CI upper limit (2-sided)	4.448115172	4.795942481	5.016406169	5.488541558
μ1 - μ0, CI lower limit (2-sided)	2.551884828	2.404057519	2.183593831	1.711458442
μ1 - μ0, CI-length (2-sided)	1.896230344	2.391884962	2.832812337	3.777083116

Text Pictures SVG PDF CSV SQLiteDb Other

1.2.3.5 The worksheet "OutputMonitorSVG"

This is a snapshot of the worksheet "OutputMonitorSVG" with the relevant formula in cell B1. The output of the formula in cell B1 is a SVG file named D07_DistPlotContinuous.svg which is written to the Output Monitor folder. The Output Monitor application must be running in order to see the output. The Output Monitor can be started from the main menu of the Tiny IDE by clicking on Tools -> Start Output Monitor.

	A	B	C	D	E	F	G	H	I
1	**Python Script:**	Beta distribution							
2									
3	**target:**	'pdf'	# 'pdf', 'cdf', 'sf', 'hf', 'chf', 'qtf', 'isf'						
4	**a:**	[5, 10.0, 20.5]							
5	**b:**	[20.5, 10.0, 5]							
6	**Title:**	'Beta distribution'							
7									
8									
9									
10	**Note:**	The result is written to the Output Monitor folder (start the Output Monitor application first!)							
11									

The formula in the cell B1. is

```
==CPY_0(TEXTJOIN(" ",1,"from A01_ExamplesPython.B18_FunctionsAndCurvesPlots.C01_Intro_Parametric2D import D07_
↪DistPlotContinuous $n importlib.reload(D07_DistPlotContinuous) $n  D07_DistPlotContinuous.DistPlotBeta(target=",B3,", a=",
↪B4,", b=",B5,", Title=",B6,", OutputMode = 'svg'",  ")"," $n result='Beta distribution'"))
```

This formula calls the function DistPlotBeta from the module D07_DistPlotContinuous in the package A01_ExamplesPython.B18_FunctionsAndCurvesPlots.C01_Intro_Parametric2D. The parameters of this function are taken from the cells B3 to B8. The result is a CSV file named TTest1External.csv which is written to the Output Monitor folder. The corresponding Python code with conventional formatting and substitution of the referenced cell values would look like this:

```
from A01_ExamplesPython.B18_FunctionsAndCurvesPlots.C01_Intro_Parametric2D import D07_DistPlotContinuous
importlib.reload(D07_DistPlotContinuous)
```

(continues on next page)

(continued from previous page)

```
D07_DistPlotContinuous.DistPlotBeta(target='pdf', a=[5, 10.0, 20.5], b=[20.5, 10.0, 5], Title='Beta distribution',␣
↪OutputMode = 'svg')
result='Beta distribution'
```

Note

Here we are using `importlib.reload` to make sure that any changes in the code of the module `D07_DistPlotContinuous` which may have occured since the last use of this spreadsheet function become effective without restarting the Python interpreter.

The cell `A3` contains `="target:"`, and the cell `B3` contains `="pdf"`. This passes the string `"pdf"` as the parameter `target` to the function `DistPlotBeta`.

The cell `A4` contains `="a:"`, and the cell `B4` contains `="[5, 10.0, 20.5]"`. This passes This passes the list `[5, 10.0, 20.5]` as the parameter `a` to the function `DistPlotBeta`.

The cell `A5` contains `="b:"`, and the cell `B5` contains `="[20.5, 10.0, 5]"`. This passes the list `[20.5, 10.0, 5]` as the parameter `b` to the function `DistPlotBeta`.

The cell `A6` contains `="Title:"`, and the cell `B6` contains `="Beta distribution"`. This passes the string `"Beta distribution"` as the keyword argument `Title` to the function `DistPlotBeta`.

And this is the Output Monitor showing the result (with the project panel hidden)

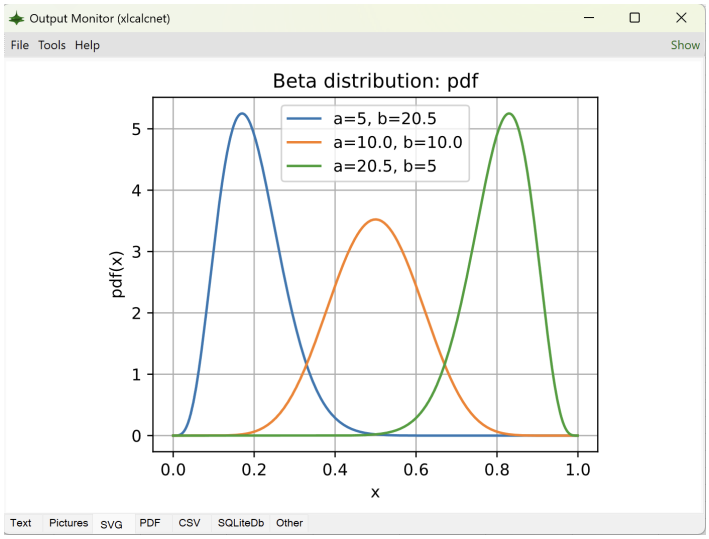

1.2.4 Using dynamic arrrays in MS Excel

Note

In the following subsection we will work with the file `XlDemoCPYdyn.xlsx`, which contains an example of using dynamic arrays in MS Excel with XlCalcNet. Examples for using MS Excel with the Python standard library start *here*, and more advanced examples using Numpy, Matplotlib, Pandas, Scipy, Seaborn and XlCalcNet start *here*.

1.2.4.1 The worksheet “Student_t_1sample_test”

Dynamic arrays are only supported in MS Excel 365 and MS Excel 2021 or later. In these versions, the output of a function can be an array, which is then automatically “spilled” into the cells below and to the right of the cell containing the formula. The size of the output array can be changed by changing the input parameters of the function.

The worksheet "Student_t_1sample_test" demonstrates the use of dynamic arrays in Excel with XlCalcNet.

This is a snapshot of the worksheet "Student_t_1sample_test" with the formula in cell `A11`, which is also where the output is starting. The main difference to the example with `*.csv` output is that now in "Options" we have `OutputMode='list'` and not `OutputMode='csv'`.

	A	B	C	D	E	F
1	**Students t-test, 1 sample**					
2						
3	**n:**	[10, 20, 30]				
4	**mu0:**	1.1				
5	**mean:**	[4.5,4.7]				
6	**std:**	[1,2,3,4]				
7	**alpha:**	0.05				
8	**Options:**	,I=True, D=True, T=True, C=True, Onesided=True, Twosided = True, OutputMode='list'				
9						
10						
11	**Item**	**Group1**	**Group2**	**Group3**	**Group4**	
12	**n**	10.0	20.0	30.0	30.0	
13	**mean**	4.5	4.7	4.7	4.7	
14	**μ0**	1.1	1.1	1.1	1.1	
15	**stdev**	1.0	2.0	3.0	4.0	
16	**alpha**	0.05	0.05	0.05	0.05	
17	**degrees of freedom**	9.0	19.0	29.0	29.0	
18	**difference of means**	3.4	3.6	3.6	3.6	
19	**rho-tilde = (mean-mu0)/stdev**	3.4	1.8	1.2	0.9	
20	**t-value (=delta)**	10.75174404	8.049844719	6.57267069	4.929503018	
21	**t(1-alpha, 1-sided)**	1.833112933	1.729132812	1.699127027	1.699127027	
22	**t(1-alpha, 2-sided)**	2.262157163	2.093024054	2.045229642	2.045229642	
23	**test, p-value (H01: μ1 ≥ μ0)**	0.9999990244	0.9999999236	0.9999998323	0.9999845715	
24	**test, p-value (H02: μ1 ≤ μ0)**	9.755717864e-7	7.640342437e-8	1.676890183e-7	1.542852988e-5	
25	**test, p-value (H03: μ1 = μ0)**	1.951143573e-6	1.528068487e-7	3.353780366e-7	3.085705976e-5	
26	**μ1 - μ0, CI upper limit (1-sided)**	3.979681208	4.373291702	4.5306502	4.840866934	
27	**μ1 - μ0, CI lower limit (1-sided)**	2.820318792	2.826708298	2.6693498	2.359133066	
28	**μ1 - μ0, CI upper limit (2-sided)**	4.115356906	4.536028813	4.72021841	5.093624547	
29	**μ1 - μ0, CI lower limit (2-sided)**	2.684643094	2.663971187	2.47978159	2.106375453	
30	**μ1 - μ0, CI-length (2-sided)**	1.430713812	1.872057626	2.24043682	2.987249094	
31						

The formula in the cell `A11` is

```
=CPY_0(TEXTJOIN(" ",1,"from A06_UserlibExamplesPython.B29_InferentialStatistics.C01_BasicTests1Sample import D01_StudentT_
↪PValues $n importlib.reload(D01_StudentT_PValues) $n  D01_StudentT_PValues.stats_student_t_1sample_test(n=",B3,", mu0=",B4,
↪", mean=",B5,", std=",B6,", alpha=", B7, B8, ")"," $n result='Students t-test, 1 sample'"))
```

This formula calls the function `stats_student_t_1sample_test` from the module `D01_StudentT_PValues` in the package `A06_UserlibExamplesPython.B29_InferentialStatistics.C01_BasicTests1Sample`. The parameters of this function are taken from the cells `B3` to `B8`. The result is a Python list, which is displayed as a dynamic array. The corresponding Python code with conventional formatting and substitution of the referenced cell values would look like this:

```
from A06_UserlibExamplesPython.B29_InferentialStatistics.C01_BasicTests1Sample import D01_StudentT_PValues
importlib.reload(D01_StudentT_PValues)
D01_StudentT_PValues.stats_student_t_1sample_test(n=[10, 20, 30], mu0=1.0, mean=[4.5,4.7], std=[1,2,3,14], alpha=0.015,␣
↪I=True, D=True, T=True, C=True, Onesided=True, Twosided=True, OutputMode='list')
result='Students t-test, 1 sample'
```

Note

Here we are using `importlib.reload` to make sure that any changes in the code of the module `D01_StudentT_PValues` which may have occured since the last use of this spreadsheet function become effective without restarting the Python interpreter.

The cell `A3` contains `="n:"`, and the cell `B3` contains `="[10, 20, 30]"`. This passes the list `[10, 20, 30]` as the parameter `n` to the function `stats_student_t_1sample_test`.

The cell `A4` contains `="mu0:"`, and the cell `B4` contains `="1.0"`. This passes the value `1.0` as the parameter `mu0` to the function `stats_student_t_1sample_test`.

The cell `A5` contains `="mean:"`, and the cell `B5` contains `="[4.5,4.7]"`. This passes the list `[4.5,4.7]` as the parameter `mean` to the function `stats_student_t_1sample_test`.

The cell `A6` contains `="std:"`, and the cell `B6` contains `="[1,2,3,14]"`. This passes the list `[1,2,3,14]` as the parameter `std` to the function `stats_student_t_1sample_test`.

The cell `A7` contains `="alpha:"`, and the cell `B7` contains `="0.015"`. This passes the value `0.015` as the parameter `alpha` to the function `stats_student_t_1sample_test`.

The cell `A8` contains `="Options:"`, and the cell `B8` contains `=",I=True, D=True, T=True, C=True, Onesided=True, Twosided = True, OutputMode='csv'"`. This passes the options `I=True, D=True, T=True, C=True, Onesided=True, Twosided = True, OutputMode='list'` as keyword arguments to the function `stats_student_t_1sample_test`.

1.2.5 Managing procedures instead of functions

It is possible to call the spreadsheet functions `CPY_0` to `CPY_9` from LibreOffice Basic and to use this to start procedures instead of functions. A few simple examples have already been prepared to demonstrate the technique.

To access the relevant dialog, click on the XlCalcNet logo (in orange) on the main menu bar:

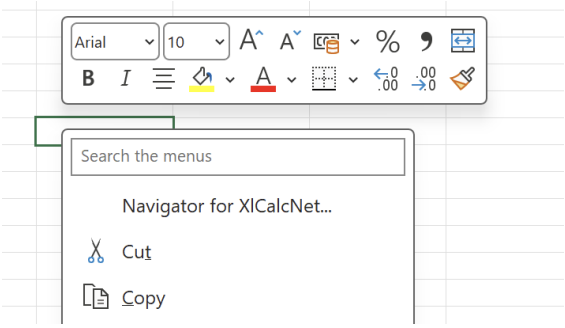

The following dialog box with the title **Navigator for XlCalcNet** will appear:

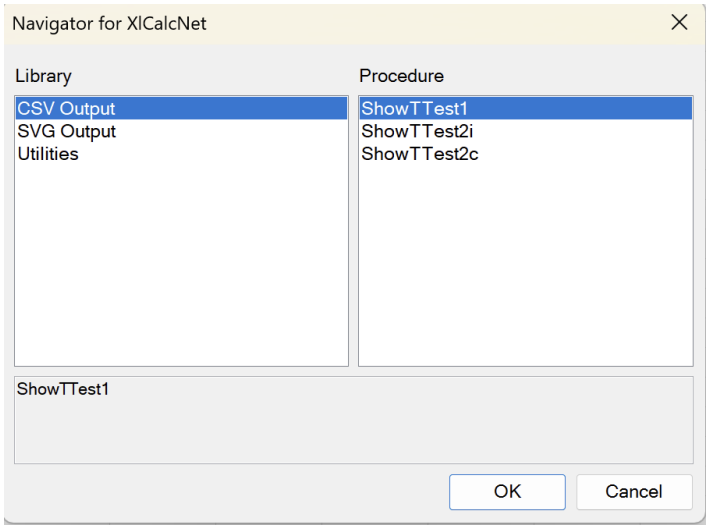

The first example, with `CSV Output` in "Category" and `ShowTTest1` in "Subroutine", will write a CSV file into the `XlCalcNetIDE\OutputMonitor` folder in the AppDataLocal folder. In order to see it, we need to open the `Output Monitor` application: start the `Tiny IDE` by clicking on its icon in the task bar, and in the main menu, click on `Tools -> Start Output Monitor`. With the `Output Monitor` application running, click `OK`. The CSV file will then immediately appear in the `Output Monitor`.

The corresponding code in the module `MpFunlabLocal -> BasicAndDialogs` is shown below:

```
Sub ShowTTest1()
    Rem Output (a .csv file) is shown in output monitor
    Code = "from A06_UserlibExamplesPython.B29_InferentialStatistics.C01_BasicTests1Sample import D01_StudentT_PValues;"
    Code = Code + "D01_StudentT_PValues.demo_stats_student_t_1sample_test(); result='Done';"
    Result = Application.Run("CPY_0", Code)
    showResult (Result)
End Sub
```

The second example, with `SVG Output` in "Category" and `ShowPolygon` in "Subroutine", will write a SVG file into the `XlCalcNetIDE\OutputMonitor` folder in the AppDataLocal folder. With the `Output Monitor` application running (see above), click `OK`. The SVG file will then immediately appear in the `Output Monitor`.

The corresponding code in the module `MpFunlabLocal` -> `BasicAndDialogs` is shown below:

```
Sub ShowPolygon()
    Rem Graphics is shown in output monitor
    Code = "from A01_ExamplesPython.B18_FunctionsAndCurvesPlots.C02_BasicCurves import D01_RegularConvexPolygon;"
    Code = Code + "D01_RegularConvexPolygon.RegularConvexPolygon(OutputMode='svg'); result='Done';"
    Result = Application.Run("CPY_0", Code)
    showResult (Result)
End Sub
```

1.2.6 Uninstalling

To uninstall these two Add-ins properly, follow these steps: Within MS Excel, on an Excel worksheet, open the Add-ins dialog from the main menu/ribbon: `Developer` -> `Excel Add-ins`. In the Add-ins dialog, unselect `MpFunlab` and `Mpfunlablocal`, and click on `OK`. Close MS Excel. When Excel is started the next time these Add-ins will not be loaded, however, they will still appear (unselected) in the Add-ins dialog (this seems to be a decade-old bug/feature). To remove them also from the Add-ins dialog, you need to rename them in their original location, start Excel again, and start the Add-ins dialog again. When you then re-select these unselected items, a dialog stating that the add-in cannot be found will appear, followed by "Delete from list?". Click on Yes, and the add-in will be removed from the list.

1.3 Using XlCalcNet within LibreOffice Calc

1.3.1 Preparing LibreOffice Calc for using XlCalcNet

To enable the use of XlCalcNet in LibreOffice Calc, two extensions need to be installed: the first, named `MpfunlabLocal.oxt`, contains functions and dialogs written in LibreOffice Basic and is intended to be modified by the user during normal use. The second, named `Mpfunlab.oxt`, contains the functionality behind the spreadsheet functions `APY0` - `APY9` and `ASDOUBLE`. It has been compiled using the SDK of LibreOfffice 7.4 and is NOT intended to be modified by the user during normal use. Both extensions are located in a subfolder of the `DataXlCalcNet` folder in the `Documents` folder: `DataXlCalcNet\SpreadsheetAddins\LibreOfficeCalc`.

1.3.1.1 Installing MpfunlabLocal.oxt and Mpfunlab.oxt

To install these two extensions properly, following the correct order is important. First install `MpfunlabLocal.oxt` within a normally launched LibreOffice Calc (i.e. without administrator privileges): Open the Extension dialog from the main menu:`Tools -> Extensions...`. In the Extension dialog click the `Add` button and in the `Documents` folder navigate to the folder `DataXlCalcNet\SpreadsheetAddins\LibreOfficeCalc`. Double- click on `MpfunlabLocal.oxt`. Then click on the `Close` button in the Extension dialog. In the dialog `Restart LibreOffice`, click on `Restart Now`. This will close LibreOffice Calc and will open the general LibreOffice desktop. Exit LibreOffice.

Now start LibreOffice with administrator privileges: Right-click on the desktop icon of LibreOffice and select `Run as administrator`. In the following dialog, confirm that you want to proceed. In the LibreOffice desktop, open a `Calc Spreadsheet`. Open the Extension dialog from the main menu:`Tools -> Extensions...`. In the Extension dialog click the `Add` button and in the `Documents` folder navigate to the folder `DataXlCalcNet\SpreadsheetAddins\LibreOfficeCalc`. Double- click on `Mpfunlab.oxt`. In the following dialog box "For whom do you want to install the extension?", click on `For all users`. In the following "License Agreement" dialog, click on `Accept`. Then click on the `Close` button in the Extension dialog. In the dialog `Restart LibreOffice`, click on `Restart Now`. This will close LibreOffice Calc and will open the general LibreOffice desktop. Exit LibreOffice.

Within a normally launched LibreOffice Calc, open the Macro Editor from the main menu: `Tools -> Macros -> Edit Macros...` In the Object Catalog of the Macro Editor, select `My Macros & Dialogs -> MpFunlabLocal -> CallsFromPython`: In the function `GetCPythonExeDirLocal` set the path of the external Python installation which matches the main internal Python version, e.g. `GetCPythonExeDirLocal ="C:\Python313"`. Then close the Macro Editor.

1.3.2 Using the Python standard library functions within spreadsheet formulas

> **Note**
>
> In the following subsections, we will work with the file `LoDemoAPYstd.ods`, which contains examples for using the Python standard library. More advanced examples using Numpy, Matplotlib, Pandas, Scipy, Seaborn and XlCalcNet start *here*.

Within LibreOffice Calc, open from the main menu `File -> Open` in the Documents folder the LibreOffice Calc workbook `DataXlCalcNet\DataExamples\MainExamples\Workbooks\LoDemoAPYstd.ods`.

This file contains several worksheets which demonstrate different possibilities of using the Python standard library within Libreoffice Calc spreadsheet formulas.

Before we start with that we will briefly explore the use of these functions with the Function Wizard of LibreOffice Calc: In the worksheet "Math", select cell `B12` and click on the icon of the Function Wizard in the Formula Bar. This opens the Function Wizard with the Structure tab selected:

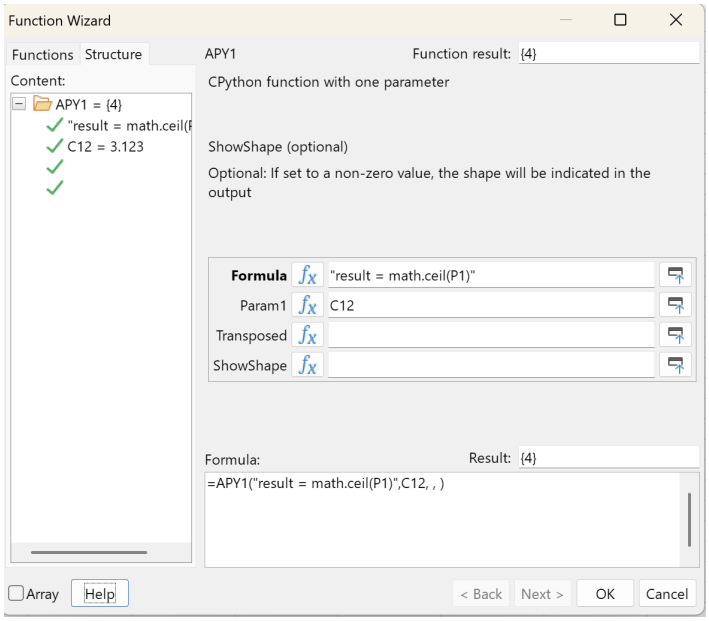

We see that the formula in the spreadsheeet cell is `=APY1("result = math.ceil(P1)",C12)`. The function `APY1` has a required string parameter, `Formula`, which contains a Python script. This python script can contain several Python statement. The last statement is always expected to assign a value to the variable result, in this case a Python float, which is coverted to a floating point number in double precision (a "Double") in LibreOffice. The next optional parameter, `Param1`, can be a string, a Double, a Boolean value or a reference. In this case, it is a reference (`C12`) which points to a Double with the value `3.123`. This optional parameter, `Param1`, is referenced in the Python formula given above as `P1`. The last but one parameter, `Transposed`, and the last parameter, `ShowShape`, are only relevant when arrays are returned; this is discussed *here*.

If we open the Functions tab, the Functions wizard looks like this:

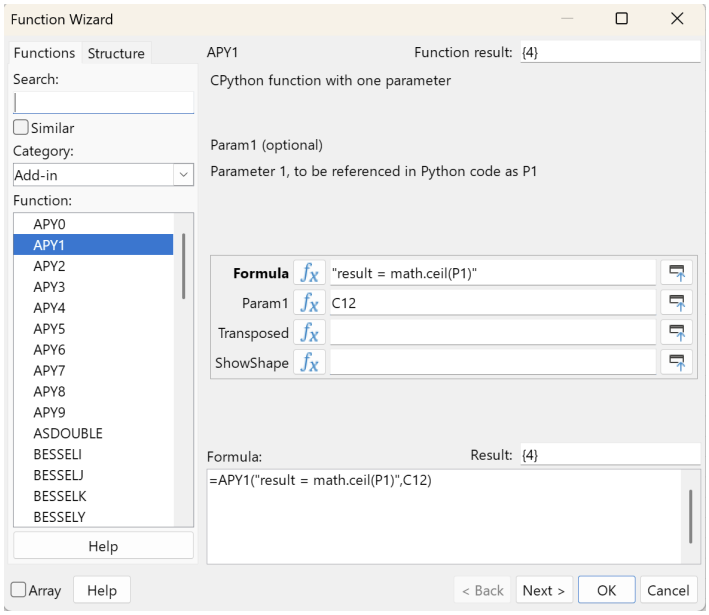

We see that the function `APY1` is in the Category "Add-in", and that there are 10 functions, `APY0` to `APY9`, which differ only by the number of parameters `Param1` to `Param9` which they support (The function `APY0` does not have a parameter `Param0`). There is also a function `ASDOUBLE`, which is used to convert string representations of a Python Fraction or Decimal into a Double; this is discussed *here*.

1.3.2.1 The worksheet "GeneralInfo"

The worksheet "GeneralInfo" contains calls to the Python modules `os`, `platform` and `sys`.

For example, the cell `B4` contains the formula `=APY0("result = platform.processor()")`. The function result depends on the hardware, e.g. `Intel64 Family 6 Model 165 Stepping 5, GenuineIntel`.

The cell `B16` contains the formula `=APY0("result = os.getcwd()")`. The function result depends on the LibreOffice installation, e.g. `C:\Program Files\LibreOffice\program`.

The cell `B33` contains the formula `=APY0("result = str(sys.float_info.epsilon)")`, which return the machine epsilon in double precision. The function result is: `2.220446049250313e-16`.

1.3.2.2 The worksheet "Math"

The worksheet "Math" demonstrates the use of the Python module `math` and the use of parameters in functions.

For example, the cell `B33` contains the formula `=APY1("result = math.exp(P1)-1",C33)`, which calculates $\exp(\mathrm{P1}) - 1$ naively. The function result is `1.00000500000696E-05`, with the cell `C33` containing the value `0.00001`.

The cell `B34` contains the formula `=APY1("result = math.expm1(P1)",C34)`, which calculates $\exp(\mathrm{P1}) - 1$ using the `expm1` function. The function result is `1.00000500001667E-05`, with the cell `C34` again containing the value `0.00001`.

The floating point values `NaN`, `+inf` and `-inf` are not supported in spreadsheet programs, which only return `#NUM!` in these cases. Use the string representation instead. This is shown in the cells `A4:B9` on this worksheet.

The cell `B36` contains the formula `=APY2("result = math.log(P1, P2)",C36, D36)`, with the cell `C36` containing the value `3.123` and the cell `D36` containing the value `10`. The function result is: `0.494571984230199`.

1.3.2.3 The worksheet "Arrays"

The worksheet "Arrays" demonstrates the use of arrays in functions. The Python equivalent of arrays are lists.

For example, the cell `B3` contains the formula `=APY0("result = str(sys.path)")`. The function `sys.path` returns a list of strings (containing the entries of the Python path), which is converted into one string by writing `str(sys.path)`. This makes sure that the result can be displayed in one cell, but the result string is quite long and hard to read.

We can use an array formula to improve readability. We recall that in addition to the usual parameters `P1` - `P9` in the functions `APY0` to `APY9` there are two more: The last but one paramter, named `Transposed`, which is optional with default value 0, where a non-zero value means that the returned array should be transposed; and the last paramter, named `ShowShape`, which is optional with default value 0, where a non-zero value means that the shape of the returned array should be indicated like `R7C3` for an array with 7 rows and 3 columns.

As an example, the cell `B6` contains the formula `=APY0("result = sys.path",1,1)` and returns the shape information `R12C1` followed by the separator `|`, followed by the first entry of the transposed array, i.e. in this case `R12xC1| C:\Users\DUHad\Documents\DataXlCalcNet`.

We can build the corresponding array formula by first selecting a range like `R12C1`, then typing in the input line of the formula bar `=APY0("result = sys.path",1,0)`, and finally, while keeping the shift and control keys pressed down, pressing the enter key.

This is what has been done in cells `B9:B20`. The formula is now displayed as `{=APY0("result = sys.path",1,0)}`, with curly braces, to indicate that it is an array formula. We can change the range which is covered by the array formula by dragging the small blue rectangle in the lower right corner in the selected range (see the screenshot below).

4	C:\Users\DUHad\Documents\DataXlCalcNet
5	C:\Python313\Lib\site-packages
6	C:\Python313\Lib
7	C:\Python313\DLLs
8	C:\Python313
9	C:\Program Files\LibreOffice\program\python-core-3.13.15\lib
10	C:\Program Files\LibreOffice\program\python-core-3.13.15\lib\site-packages
11	C:\Program Files\LibreOffice\program
12	C:\Program Files\LibreOffice\program\python313.zip
13	C:\Program Files\LibreOffice\program\Lib
14	C:\Windows\Microsoft.NET\Framework64\v4.0.30319\
15	C:\Program Files\LibreOffice\share\extensions\dict-en\pythonpath
16	

1.3.2.4 The worksheet "Data"

The worksheet "Data " demonstrates the use of named ranges in LibreOffice Calc spreadsheet formulas.

Currently there a two small datasets with predefined as named ranges: `matA` defined as the range $Data.$A$3:$A$7 and `matB` defined as the range $Data.$A$3:$A$7.

These ranges are used in the workbook "Arrays".

1.3.3 Using Numpy, Matplotlib, Pandas, Scipy, Seaborn and XlCalcNet within spreadsheet formulas

> **Note**
>
> In the following subsections. we will work with the file `LoDemoAPYadv.ods`, which contains more advanced examples using Numpy, Matplotlib, Pandas, Scipy, Seaborn and XlCalcNet. Examples for using LibreOffice Calc with the Python standard library start *here*.

Within LibreOffice Calc, open from the main menu `File -> Open` in the Documents folder the LibreOffice Calc workbook `DataXlCalcNet\DataExamples\MainExamples\Workbooks\LoDemoAPYadv.ods`.

This file contains several worksheets which demonstrate different possibilities of using Numpy, Matplotlib, Pandas, Scipy, Seaborn and XlCalcNet within Libreoffice Calc spreadsheet formulas.

Some of these functions write their output into the `XlCalcNetIDE\OutputMonitor` folder in the AppDataLocal folder. In order to see it, we need to open the `Output Monitor` application: start the `Tiny IDE` by clicking on its icon in the task bar, and in the main menu, click on `Tools -> Start Output Monitor`.

1.3.3.1 The worksheet "FractionsInput"

The worksheet "FractionsInput " demonstrates the use of the Python data type `Fraction` in LibreOffice Calc spreadsheet formulas.

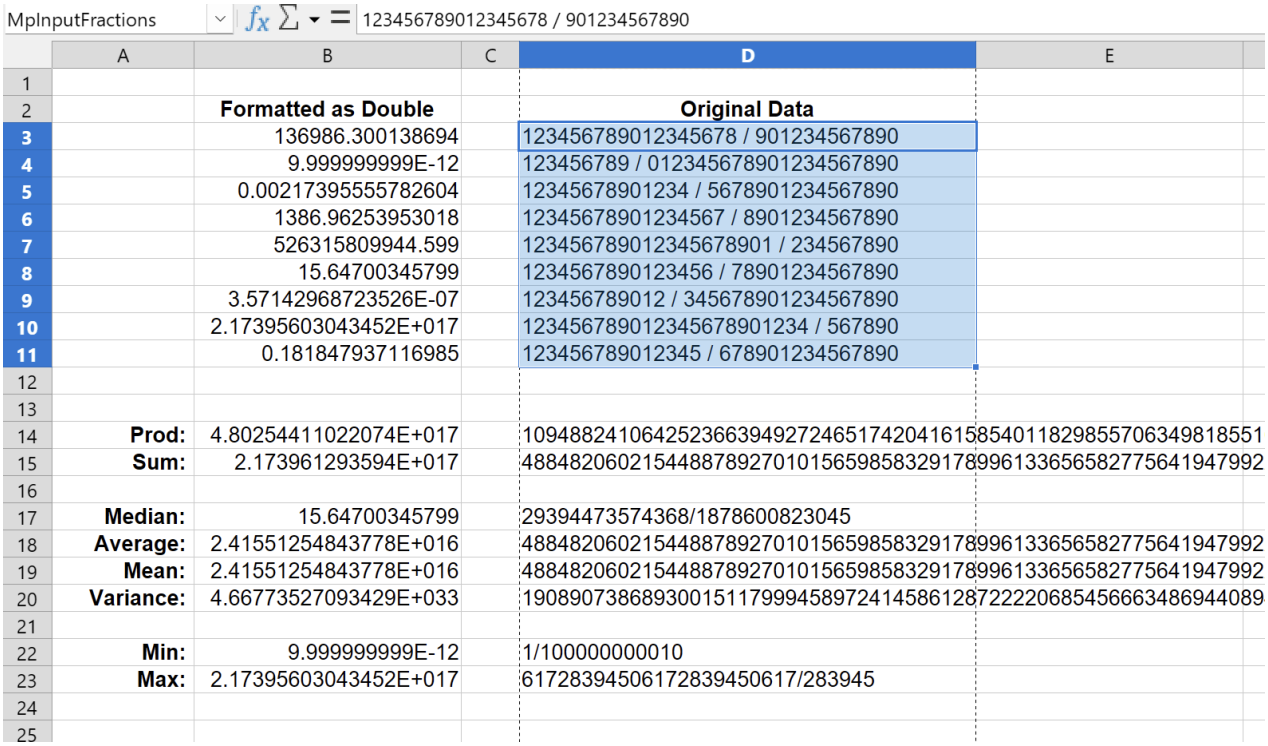

	A	B	C	D	E
1					
2		**Formatted as Double**		**Original Data**	
3		136986.300138694		123456789012345678 / 901234567890	
4		9.999999999E-12		123456789 / 01234567890123456789O	
5		0.00217395555782604		12345678901234 / 5678901234567890	
6		1386.96253953018		12345678901234567 / 8901234567890	
7		526315809944.599		123456789012345678901 / 234567890	
8		15.64700345799		1234567890123456 / 78901234567890	
9		3.57142968723526E-07		123456789012 / 345678901234567890	
10		2.17395603043452E+017		1234567890123456789012345 / 567890	
11		0.181847937116985		123456789012345 / 678901234567890	
12					
13					
14	**Prod:**	4.80254411022074E+017		109488241064252366394927246517420416158540118298557063498185512	
15	**Sum:**	2.173961293594E+017		488482060215448878927010156598583291789961336565827756419479920	
16					
17	**Median:**	15.64700345799		29394473574368/1878600823045	
18	**Average:**	2.41551254843778E+016		4884820602154488789270101565985832917899613365658277564194799200	
19	**Mean:**	2.41551254843778E+016		4884820602154488789270101565985832917899613365658277564194799200	
20	**Variance:**	4.66773527093429E+033		190890738689300151179994589724145861287222206854566634869440890	
21					
22	**Min:**	9.999999999E-12		1/100000000010	
23	**Max:**	2.17395603043452E+017		617283945061728394506 17/283945	
24					
25					

If we try to enter a number like `123456789012345678/901234567890`, i.e. a number with more than 16 digits into a spreadsheet cell, it will automatically be shortened to `1.23456789012346E+029`. In order to be able to enter such numbers into spreadsheet cells, the cells must first be formatted as text, and thereafter these numbers can be entered as text. This is mostly useful when working with Python Fractions and Decimals.

However, this kind of input is hard to read; it is also not directly usable for numerical spreadsheet functions. This can be changed by using the function `ASDOUBLE`, a shown in column `B`

As an example, worksheet "FractionsInput" contains a named range called "MpInputFractions" in column `A`, which can be used as input for descriptive statistics or linear algebra routines.

The module `npm` of XlCalcNet can be used to calculate desciptive statistics, like `prod`, `sum`, `mean`, `median`, `variance` with fractions. The function `npm.mean` can be called from a spreadsheet cell as follows:

```
=APY1("from xlcalcnet import npm, qpm $n x = npm.array(P1, dtype=qpm); result=str(npm.prod(x))",MpInputFractions)
```

Às before, we are using `$n` for newline and `$t` for indentation. The result is itself a `Fraction` (converted to a string), and is exact. The corresponding Python code with conventional formatting would look like this (where `P1` is the input range):

```
from xlcalcnet import npm, qpm
x = npm.array(P1, dtype=qpm)
result=str(npm.prod(x))
```

Note that the input range is converted into a Numpy array with data type `qpm`, which is the data type for rational numbers in XlCalcNet. The result is then converted into a string, so that it can be displayed in a spreadsheet cell.

Since the string output is quite long, we can use `result=float(npm.prod(x))` instead of `result=str(npm.prod(x))` to get a floating point number in double precision, which is more readable. However, this will not be exact anymore.

1.3.3.2 The worksheet "DecimalsInput"

The worksheet "DecimalsInput " demonstrates the use of the Python data type `Decimal` in LibreOffice Calc spreadsheet formulas.

MpInputDecimals | 12345678901234567.901234567890

	A	B	C	D	E
1					
2	**Dps:**	50			
3					
4		**Formatted as Double**		**Original Data**	
5		1.23456789012346E+017		12345678901234567.901234567890	
6		123456789.012346		123456789.01234567890123456789	
7		1.23456789012346E+015		1234567890123456.78901234567890	
8		12345678901234.6		12345678901234.5678901234567890	
9		1.23456789012346E+020		123456789012345678901.234567890	
10		1.23456789012346E+015		1234567890123456.78901234567890	
11		123456789012.346		123456789012.345678901234567890	
12		1.23456789012346E+023		12345678901234567890123.4567890	
13		123456789012346		123456789012345.678901234567890	
14					
15					
16	**Prod:**	6.66246276571616E+136		6.66246276571615849418609358097213134465746545108 69E+136	
17	**Sum:**	1.23580371863209E+023		123580371863208865332109.886533087408281457890	
18					
19	**Median:**	1.23456789012346E+015		1234567890123456.78901234567890	
20	**Average:**	1.37311524292454E+022		13731152429245429481345.542948120823142384210	
21	**Mean:**	1.37311524292454E+022		13731152429245429481345.542948120823142384210	
22	**Variance:**	1.50496589683514E+045		150496589683514229980943223153006330220129796 7.884	
23					
24	**Min:**	123456789.012346		123456789.01234567890123456789	
25	**Max:**	1.23456789012346E+023		12345678901234567890123.4567890	
26					

If we try to enter a number like `12345678901234567.901234567890`, i.e. a number with more than 16 digits into a spreadsheet cell, it will automatically be shortened to `1.23456789012346E+017`. In order to be able to enter such numbers into spreadsheet cells, the cells must first be formatted as text, and thereafter these numbers can be entered as text. This is mostly useful when working with Python Fractions and Decimals.

However, this kind of input is hard to read; it is also not directly usable for numerical spreadsheet functions. This can be changed by using the function `ASDOUBLE`, a shown in column `B`

As an example, worksheet "DecimalsInput" contains a named range called "MpInputDecimals" in column `C`, which can be used as input for descriptive statistics or linear algebra routines.

The module `npm` of XlCalcNet can be used to calculate desciptive statistics, like `prod`, `sum`, `mean`, `median`, `variance` with decimals. The function `npm.mean` can be called from a spreadsheet cell as follows:

```
=APY2("from xlcalcnet import npm, dpm $n dpm.dps=int(P2); x = npm.array(P1, dtype=dpm); result=str(npm.mean(x))",
↪MpInputDecimals, $B$2)
```

As before, we are using `$n` for newline and `$t` for indentation. The result is itself a `Decimal` (converted to a string), and is correct to the number of digits specified. The corresponding Python code with conventional formatting would look like this (where `P1` is the input range and `P2` is the number of digits):

```
from xlcalcnet import npm, dpm
dpm.dps=int(P2)
x = npm.array(P1, dtype=dpm)
result=str(npm.mean(x))
```

Note that the input range is converted into a Numpy array with data type `dpm`, which is the data type for decimal numbers in XlCalcNet. The result is then converted into a string, so that it can be displayed in a spreadsheet cell.

Since the string output is quite long, we can use `result=float(npm.prod(x))` instead of `result=str(npm.prod(x))` to get a floating point number in double precision, which is more readable. However, this will then be correct only to the precision of a double-precision floating-point number.

1.3.3.3 The worksheet "Programming"

The worksheet "Programming" demonstrates the use of small python scripts in LibreOffice Calc spreadsheet formulas.

	A	B	C	D
1				
2				
3	**Python standard library: simple loop**			
4	**n:**	45		
5	**Result:**	1980		
6				
7				
8				
9				
10	**Scipy: Numerical quadrature; f(x) = a*x**2 + b**			
11	**Integral start:**	-1.4		
12	**Integral end:**	1.5		
13	**Parameter a:**	2.1		
14	**Parameter b:**	1.1		
15	**Result (integral, error estimate):**	(7.473300000000001, 8.297029729931183e-14)		
16	**Result (integral only):**	7.4733		
17	**Result (error estimate only):**	8.29702973E-14		
18				
19				

The first example in this worksheeet shows how to program a simple loop. The formula in the cell `B4`. is

```
=APY1("temp = 0 $n for i in range(int(P1)): $n$t temp += i $n result = 2 * temp", B4)
```

The cell `B4` contains the value `45`; the result is `1980`. The corresponding Python code with conventional formatting would look like this(where `P1` is `n`, the number of iterations):

```
temp = 0
for i in range(int(P1)):
    temp += i
result = 2 * temp
```

The second example in this worksheet shows how to perform numerical integration.The formula in the cell `B15`. is

```
=APY4("from scipy.integrate import quad $n def integrand(x, a, b): return a*x**2 + b $n a = float(P3); b = float(P4);  $n I␣
↪= quad(integrand, float(P1), float(P2), args=(a,b))   $n result = str(I) ", B11, B12, B13, B14)
```

This formula calls the function `quad` from the module `scipy.integrate` in the package `scipy`. The parameters of this function are taken from the cells `B11` to `B14`. The result is a tuple containing the intergral and an error estimate. The corresponding Python code with conventional formatting would look like this (with P1 is the lower limit of integration, P2 is the upper limit, P3 is the coefficient of x^2, and P4 is the constant term):

```
from scipy.integrate import quad
def integrand(x, a, b): return a*x**2 + b
a = float(P3); b = float(P4)
I = quad(integrand, float(P1), float(P2), args=(a,b))
result = str(I)
```

The cells `B16` to `B17` show the same result as an array formula, with `B16` containing the integral and `B17` the error estimate.

1.3.3.4 The worksheet "OutputMonitorCSV"

This is a snapshot of the worksheet "OutputMonitorCSV" with the relevant formula in cell `B1`. The output of the formula in cell `B1` is a CSV file named `TTest1External.csv` which is written to the Output Monitor folder. The Output Monitor application must be running in order to see the output. The Output Monitor can be started from the main menu of the Tiny IDE by clicking on `Tools -> Start Output Monitor`.

	A	B	C	D	E	F	G	H
1	**Python Script:**	Students t-test, 1 sample						
2								
3	**n:**	[10, 20, 30]						
4	**mu0:**	1.0						
5	**mean:**	[4.5,4.7]						
6	**std:**	[1,2,3,4]						
7	**alpha:**	0.05						
8	**Options:**	,I=True, D=True, T=True, C=True, Onesided=True, Twosided = True, OutputMode='csv'						
9								
10								
11								
12	**Note:**	The result is written to the Output Monitor folder (start the Output Monitor application first!)						
13								

The formula in the cell `B1`. is

```
=APY0(TEXTJOIN(" ",1,"from A06_UserlibExamplesPython.B29_InferentialStatistics.C01_BasicTests1Sample import D01_StudentT_
↪PValues $n importlib.reload(D01_StudentT_PValues) $n D01_StudentT_PValues.stats_student_t_1sample_test(n=",B3,", mu0=",B4,
↪", mean=",B5,", std=",B6,", alpha=", B7, B8, ")"," $n result='Students t-test, 1 sample'"))
```

This formula calls the function `stats_student_t_1sample_test` from the module `D01_StudentT_PValues` in the package `A06_UserlibExamplesPython.B29_InferentialStatistics.C01_BasicTests1Sample`. The parameters of this function are taken from the cells `B3` to `B8`. The result is a CSV file named `TTest1External.csv` which is written to the Output Monitor folder. The corresponding Python code with conventional formatting and substitution of the referenced cell values would look like this:

```
from A06_UserlibExamplesPython.B29_InferentialStatistics.C01_BasicTests1Sample import D01_StudentT_PValues
importlib.reload(D01_StudentT_PValues)
D01_StudentT_PValues.stats_student_t_1sample_test(n=[10, 20, 30], mu0=1.0, mean=[4.5,4.7], std=[1,2,3,14], alpha=0.015,␣
↪I=True, D=True, T=True, C=True, Onesided=True, Twosided=True, OutputMode='csv')
result='Students t-test, 1 sample'
```

> **Note**
>
> Here we are using `importlib.reload` to make sure that any changes in the code of the module `D01_StudentT_PValues` which may have occured since the last use of this spreadsheet function become effective without restarting the Python interpreter.

The cell `A3` contains `="n:"`, and the cell `B3` contains `="[10, 20, 30]"`. This passes the list `[10, 20, 30]` as the parameter `n` to the function `stats_student_t_1sample_test`.

The cell `A4` contains `="mu0:"`, and the cell `B4` contains `="1.0"`. This passes the value `1.0` as the parameter `mu0` to the function `stats_student_t_1sample_test`.

The cell `A5` contains `="mean:"`, and the cell `B5` contains `="[4.5,4.7]"`. This passes the list `[4.5,4.7]` as the parameter `mean` to the function `stats_student_t_1sample_test`.

The cell `A6` contains `="std:"`, and the cell `B6` contains `="[1,2,3,14]"`. This passes the list `[1,2,3,14]` as the parameter `std` to the function `stats_student_t_1sample_test`.

The cell `A7` contains `="alpha:"`, and the cell `B7` contains `="0.015"`. This passes the value `0.015` as the parameter `alpha` to the function `stats_student_t_1sample_test`.

The cell `A8` contains `="Options:"`, and the cell `B8` contains `=",I=True, D=True, T=True, C=True, Onesided=True, Twosided = True, OutputMode='csv'"`. This passes the options `I=True, D=True, T=True, C=True, Onesided=True, Twosided = True, OutputMode='csv'` as keyword arguments to the function `stats_student_t_1sample_test`.

And this is the Output Monitor showing the result (with the project panel hidden)

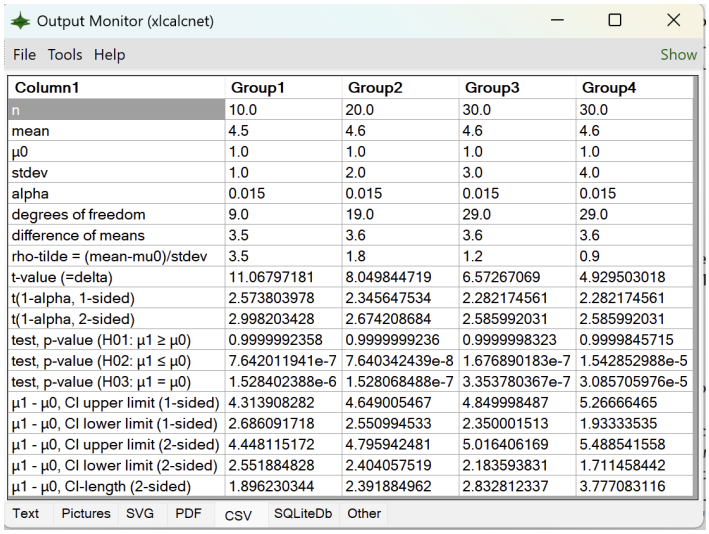

Column1	Group1	Group2	Group3	Group4
n	10.0	20.0	30.0	30.0
mean	4.5	4.6	4.6	4.6
μ0	1.0	1.0	1.0	1.0
stdev	1.0	2.0	3.0	4.0
alpha	0.015	0.015	0.015	0.015
degrees of freedom	9.0	19.0	29.0	29.0
difference of means	3.5	3.6	3.6	3.6
rho-tilde = (mean-mu0)/stdev	3.5	1.8	1.2	0.9
t-value (=delta)	11.06797181	8.049844719	6.57267069	4.929503018
t(1-alpha, 1-sided)	2.573803978	2.345647534	2.282174561	2.282174561
t(1-alpha, 2-sided)	2.998203428	2.674208684	2.585992031	2.585992031
test, p-value (H01: μ1 ≥ μ0)	0.9999992358	0.9999999236	0.9999998323	0.9999845715
test, p-value (H02: μ1 ≤ μ0)	7.642011941e-7	7.640342439e-8	1.676890183e-7	1.542852988e-5
test, p-value (H03: μ1 = μ0)	1.528402388e-6	1.528068488e-7	3.353780367e-7	3.085705976e-5
μ1 - μ0, CI upper limit (1-sided)	4.313908282	4.649005467	4.849998487	5.26666465
μ1 - μ0, CI lower limit (1-sided)	2.686091718	2.550994533	2.350001513	1.93333535
μ1 - μ0, CI upper limit (2-sided)	4.448115172	4.795942481	5.016406169	5.488541558
μ1 - μ0, CI lower limit (2-sided)	2.551884828	2.404057519	2.183593831	1.711458442
μ1 - μ0, CI-length (2-sided)	1.896230344	2.391884962	2.832812337	3.777083116

1.3.3.5 The worksheet "OutputMonitorSVG"

This is a snapshot of the worksheet "OutputMonitorSVG" with the relevant formula in cell `B1`. The output of the formula in cell `B1` is a SVG file named `D07_DistPlotContinuous.svg` which is written to the Output Monitor folder. The Output Monitor application must be running in order to see the output. The Output Monitor can be started from the main menu of the Tiny IDE by clicking on `Tools -> Start Output Monitor`.

	A	B	C	D	E	F	G
1	**Python Script:**	Beta distribution					
2							
3	**target:**	'pdf'	# 'pdf', 'cdf', 'sf', 'hf', 'chf', 'qtf', 'isf'				
4	**a:**	[5, 10.0, 20.5]					
5	**b:**	[20.5, 10.0, 5]					
6	**Title:**	'Beta distribution'					
7							
8							
9							
10	**Note:**	The result is written to the Output Monitor folder (start the Output Monitor application first!)					
11							

The formula in the cell `B1`. is

```
==APY0(TEXTJOIN(" ",1,"from A01_ExamplesPython.B18_FunctionsAndCurvesPlots.C01_Intro_Parametric2D import D07_
↪DistPlotContinuous $n importlib.reload(D07_DistPlotContinuous) $n  D07_DistPlotContinuous.DistPlotBeta(target=",B3,", a=",
↪B4,", b=",B5,", Title=",B6,", OutputMode = 'svg'",  ")"," $n result='Beta distribution'"))
```

This formula calls the function `DistPlotBeta` from the module `D07_DistPlotContinuous` in the package `A01_ExamplesPython.B18_FunctionsAndCurvesPlots.C01_Intro_Parametric2D`. The parameters of this function are taken from the cells `B3` to `B8`. The result is a CSV file named `TTest1External.csv` which is written to the Output Monitor folder. The corresponding Python code with conventional formatting and substitution of the referenced cell values would look like this:

```
from A01_ExamplesPython.B18_FunctionsAndCurvesPlots.C01_Intro_Parametric2D import D07_DistPlotContinuous
importlib.reload(D07_DistPlotContinuous)
D07_DistPlotContinuous.DistPlotBeta(target='pdf', a=[5, 10.0, 20.5], b=[20.5, 10.0, 5], Title='Beta distribution',␣
↪OutputMode = 'svg')
result='Beta distribution'
```

> **Note**
>
> Here we are using `importlib.reload` to make sure that any changes in the code of the module `D07_DistPlotContinuous` which may have occured since the last use of this spreadsheet function become effective without restarting the Python interpreter.

The cell A3 contains ="target:", and the cell B3 contains ="pdf". This passes the string "pdf" as the parameter target to the function DistPlotBeta.

The cell A4 contains ="a:", and the cell B4 contains ="[5, 10.0, 20.5]". This passes This passes the list [5, 10.0, 20.5] as the parameter a to the function DistPlotBeta.

The cell A5 contains ="b:", and the cell B5 contains ="[20.5, 10.0, 5]". This passes the list [20.5, 10.0, 5] as the parameter b to the function DistPlotBeta.

The cell A6 contains ="Title:", and the cell B6 contains ="Beta distribution". This passes the string "Beta distribution" as the keyword argument Title to the function DistPlotBeta.

And this is the Output Monitor showing the result (with the project panel hidden)

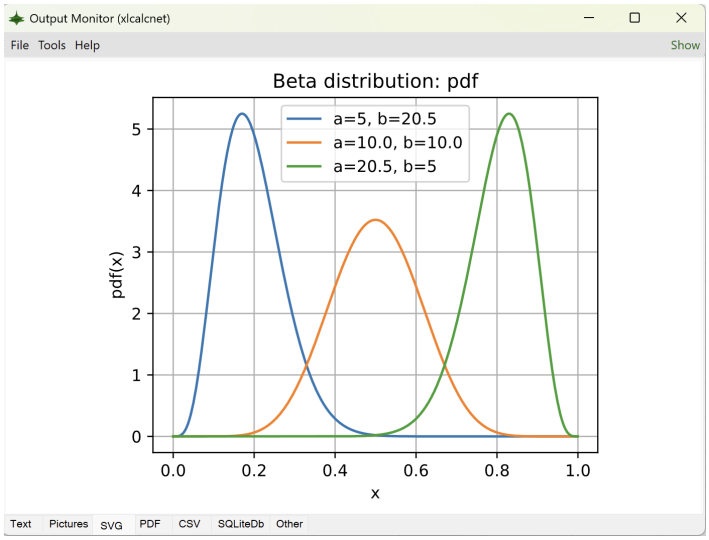

1.3.4 Using links to external *.csv, *.xlsx and *.svg files

Note

In the following subsections. we will work with the file LoDemoAPYext.ods, which contains more advanced examples using Numpy, Matplotlib, Pandas, Scipy, Seaborn and XlCalcNet. Examples for using LibreOffice Calc with the Python standard library start *here*.

Within LibreOffice Calc, open from the main menu File -> Open in the Documents folder the LibreOffice Calc workbook \DataXlCalcNet\DataExamples\MainExamples\Workbooks\LoDemoAPYext.ods.

This file contains several worksheets which demonstrate the use of links to external files in such a way that the output is displayed in the spreadsheet. This is demonstrated in the worksheets “ExternalCSV”, “ExternalXlsx” and “ExternalSVG”.

Using links to external files poses a security risk, because it allows the execution of arbitrary code on the local computer. This can be adressed by using “Trusted Locations”: In the main menu, click on Tools -> Options -> LibreOffice -> Security -> Macro Security.... In the dialog “Macro Security”, select the tab “Trusted Sources” and in the section “Trusted File Locations”, click “Add”, and add the path to the folder of the file **containing the links** to the external files (NOT the paths to the external files themselves!). In our case this is the file LoDemoAPYext.ods and the path to the folder containing this file is DataXlCalcNet\DataExamples\MainExamples\Workbooks). Confirm with OK.

Still in the Options dialog, go to LibreOffice Calc -> General. In the section “Update links when opening”, select the item “Always (from trusted locations)” and confirm with OK.

1.3.4.1 The worksheet “ExternalCSV”

The worksheet “ExternalCSV” demonstrates the use of a link to an external `*.csv` file in such a way that the output is displayed in the spreadsheet and is updated automatically when the input data changes. This mimics, to some extend, the use of dynamic arrays in Excel, which are not available in LibreOffice Calc at the time of writing (October 2026).

This is a snapshot of the worksheet “ExternalCSV” with the formula in cell `B1` and the output starting at cell `A10`. The output of the formula in cell `B1` is a CSV file named `TTest1External.csv` which is written to the Output Monitor folder.

	A	B	C	D	E	F
1	**Python Script:**	Students t-test, 1 sample				
2						
3	**n:**	[10, 20, 30]				
4	**mu0:**	1.0				
5	**mean:**	[4.5,4.7]				
6	**std:**	[1,2,3,14]				
7	**alpha:**	0.015				
8	**Options:**	,I=True, D=True, T=True, C=True, Onesided=True, Twosided = True, OutputMode='csv'				
9						
10	Items	Group1	Group2	Group3	Group4	
11	n	10	20	30	30	
12	mean	4.5	4.7	4.7	4.7	
13	μ0	1	1	1	1	
14	stdev	1	2	3	4	
15	alpha	0.05	0.05	0.05	0.05	
16	degrees of freedom	9	19	29	29	
17	difference of means	3.5	3.7	3.7	3.7	
18	rho-tilde = (mean-mu0)/stdev	3.5	1.85	1.233333333	0.925	
19	t-value (=delta)	11.06797181	8.273451517	6.755244876	5.066433657	
20	t(1-alpha, 1-sided)	1.833112933	1.729132812	1.699127027	1.699127027	
21	t(1-alpha, 2-sided)	2.262157163	2.093024054	2.045229642	2.045229642	
22	test, p-value (H01: μ1 ≥ μ0)	0.9999992358	0.9999999493	0.9999998973	0.9999894555	
23	test, p-value (H02: μ1 ≤ μ0)	7.642011941E-07	5.068466643E-08	1.026891697E-07	1.0544453E-05	
24	test, p-value (H03: μ1 = μ0)	1.528402388E-06	1.013693329E-07	2.053783395E-07	2.1088906E-05	
25	μ1 - μ0, CI upper limit (1-sided)	4.079681208	4.473291702	4.630650201	4.940866934	
26	μ1 - μ0, CI lower limit (1-sided)	2.920318792	2.926708298	2.7693498	2.459133066	
27	μ1 - μ0, CI upper limit (2-sided)	4.215356906	4.636028813	4.82021841	5.193624547	
28	μ1 - μ0, CI lower limit (2-sided)	2.784643094	2.763971187	2.57978159	2.206375453	
29	μ1 - μ0, CI-length (2-sided)	1.430713812	1.872057626	2.240436821	2.987249094	
30						
31						

The formula in the cell `B1`. is

```
=APY0(TEXTJOIN(" ",1,"from A06_UserlibExamplesPython.B29_InferentialStatistics.C01_BasicTests1Sample import D01_StudentT_
↪PValues $n importlib.reload(D01_StudentT_PValues) $n D01_StudentT_PValues.stats_student_t_1sample_test(n=",B3,", mu0=",B4,
↪", mean=",B5,", std=",B6,", alpha=", B7, B8, ")"," $n result='Students t-test, 1 sample'"))
```

This formula calls the function `stats_student_t_1sample_test` from the module `D01_StudentT_PValues` in the package `A06_UserlibExamplesPython.B29_InferentialStatistics.C01_BasicTests1Sample`. The parameters of this function are taken from the cells `B3` to `B8`. The result is a CSV file named `TTest1External.csv` which is written to the Output Monitor folder. The corresponding Python code with conventional formatting and substitution of the referenced cell values would look like this:

```
from A06_UserlibExamplesPython.B29_InferentialStatistics.C01_BasicTests1Sample import D01_StudentT_PValues
importlib.reload(D01_StudentT_PValues)
D01_StudentT_PValues.stats_student_t_1sample_test(n=[10, 20, 30], mu0=1.0, mean=[4.5,4.7], std=[1,2,3,14], alpha=0.015,␣
↪I=True, D=True, T=True, C=True, Onesided=True, Twosided=True, OutputMode='csv')
result='Students t-test, 1 sample'
```

> **Note**
>
> Here we are using `importlib.reload` to make sure that any changes in the code of the module `D01_StudentT_PValues` which may have occured since the last use of this spreadsheet function become effective without restarting the Python interpreter.

The cell `A3` contains `="n:"`, and the cell `B3` contains `="[10, 20, 30]"`. This passes the list `[10, 20, 30]` as the parameter `n` to the function `stats_student_t_1sample_test`.

The cell `A4` contains `="mu0:"`, and the cell `B4` contains `="1.0"`. This passes the value `1.0` as the parameter `mu0` to the function `stats_student_t_1sample_test`.

The cell A5 contains ="mean:", and the cell B5 contains ="[4.5,4.7]". This passes the list [4.5,4.7] as the parameter mean to the function stats_student_t_1sample_test.

The cell A6 contains ="std:", and the cell B6 contains ="[1,2,3,14]". This passes the list [1,2,3,14] as the parameter std to the function stats_student_t_1sample_test.

The cell A7 contains ="alpha:", and the cell B7 contains ="0.015". This passes the value 0.015 as the parameter alpha to the function stats_student_t_1sample_test.

The cell A8 contains ="Options:", and the cell B8 contains =",I=True, D=True, T=True, C=True, Onesided=True, Twosided = True, OutputMode='csv'". This passes the options I=True, D=True, T=True, C=True, Onesided=True, Twosided = True, OutputMode='csv' as keyword arguments to the function stats_student_t_1sample_test.

To have the output displayed in the spreadsheet, follow these steps:

Select the cell where the output should start to be displayed (in this case, cell A10). In the main menu, click on Sheet -> External Links.... In the dialog "External Data", click on Browse.... In the dialog "Insert", select the file TTest1External.csv in the Output Monitor folder and click on Open.

This will open the dialog "Text Import - [TTest1External.csv]".

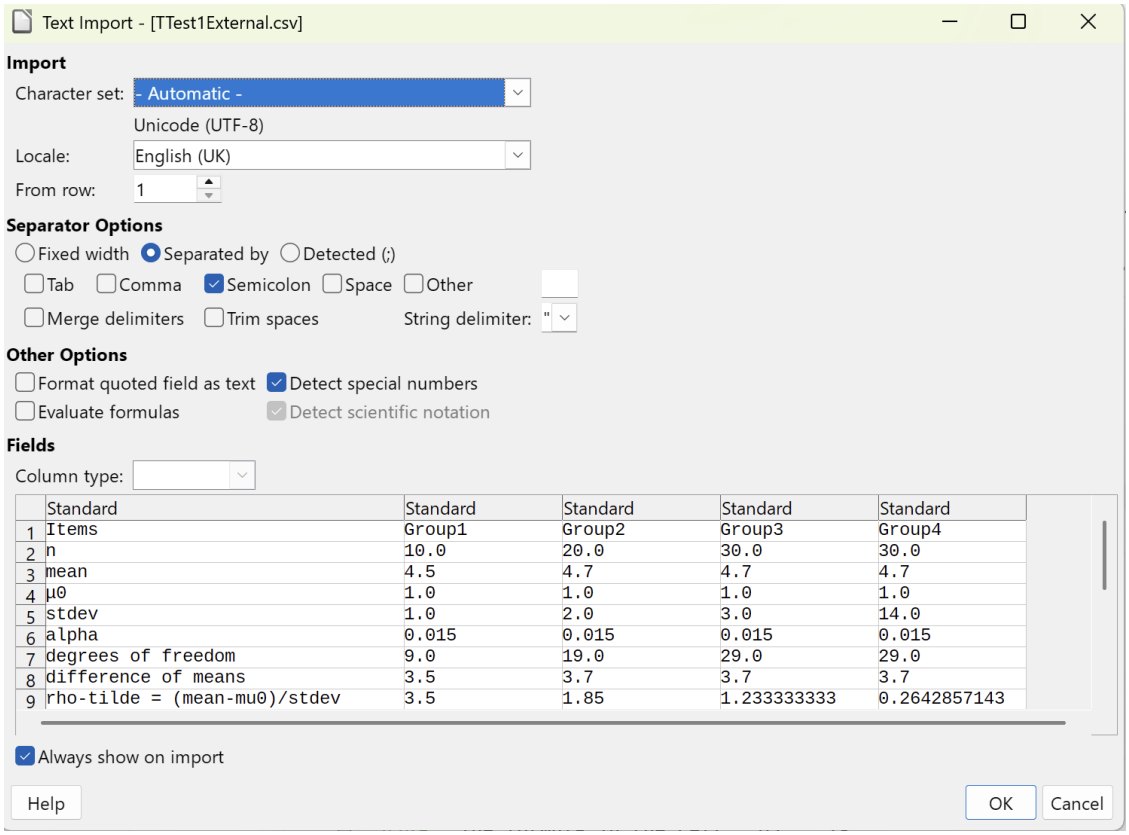

	Standard	Standard	Standard	Standard	Standard
1	Items	Group1	Group2	Group3	Group4
2	n	10.0	20.0	30.0	30.0
3	mean	4.5	4.7	4.7	4.7
4	μ0	1.0	1.0	1.0	1.0
5	stdev	1.0	2.0	3.0	14.0
6	alpha	0.015	0.015	0.015	0.015
7	degrees of freedom	9.0	19.0	29.0	29.0
8	difference of means	3.5	3.7	3.7	3.7
9	rho-tilde = (mean-mu0)/stdev	3.5	1.85	1.233333333	0.2642857143

Make sure that the option "Separated by" is selected, and that the option "Semicolon" is checked. Then click on OK.

Back in the dialog "External Data", check the box "Update every" and and set the time to 5 seconds. The output of the function stats_student_t_1sample_test will now be displayed in the spreadsheet, starting at the cell which was selected when opening the dialog "External Data". And because the option "Update every" is checked, the output will be updated every 5 seconds. If you change any of the parameters in cells B3 to B8, the output will be updated accordingly.

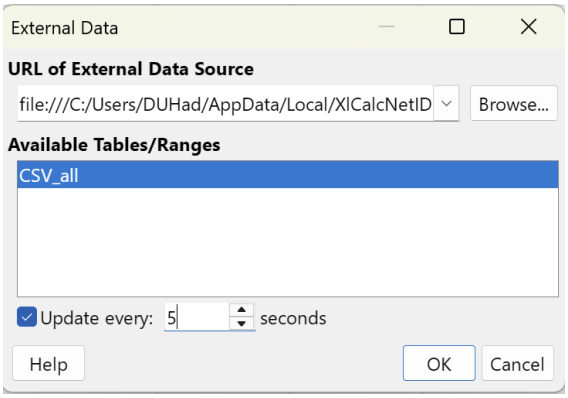

If later on you want to change the settings of the external link, click in the main menu on `Edit -> Links to External Files...`. In the dialog "Edit Links", select the link to the file `TTest1External.csv` and click on `Modify...`. This will open the dialog "External Data" again, where you can change the settings.

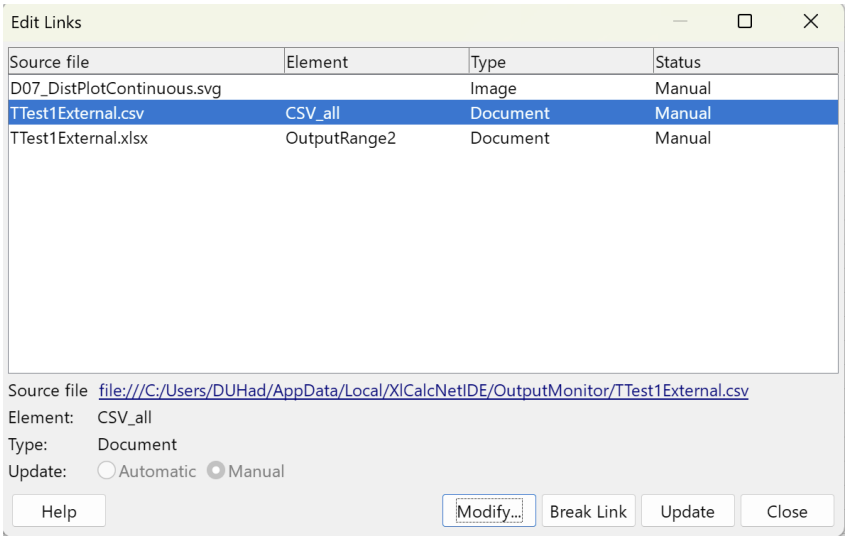

1.3.4.2 The worksheet "ExternalXlsx"

The worksheet "ExternalXlsx" demonstrates the use of a link to an external `*.xlsx` file in such a way that the output is displayed in the spreadsheet and is updated automatically when the input data changes. This mimics, to some extend, the use of dynamic arrays in Excel, which are not available in LibreOffice Calc at the time of writing (October 2026).

This is a snapshot of the worksheet "ExternalXlsx" with the formula in cell `B1` and the output starting at cell `A10`. The output of the formula in cell `B1` is an Excel file named `TTest1External.xlsx` which is written to the Output Monitor folder.

	A	B	C	D	E
1	**Python Script:**	Students t-test, 1 sample			
2					
3	**n:**	[10, 20, 30]			
4	**mu0:**	1.0			
5	**mean:**	[4.5,4.7]			
6	**std:**	[1,2,3,4]			
7	**alpha:**	0.015			
8	**Options:**	,I=True, D=True, T=True, C=True, Onesided=True, Twosided = True, OutputMode='xlsx			
9					
10	**Item**	**Group1**	**Group2**	**Group3**	**Group4**
11	**n**	10.0	20.0	30.0	30.0
12	**mean**	4.5	4.7	4.7	4.7
13	**μ0**	1.0	1.0	1.0	1.0
14	**stdev**	1.0	2.0	3.0	4.0
15	**alpha**	0.015	0.015	0.015	0.015
16	**degrees of freedom**	9.0	19.0	29.0	29.0
17	**difference of means**	3.5	3.7	3.7	3.7
18	**rho-tilde = (mean-mu0)/stdev**	3.5	1.85	1.233333333	0.925
19	**t-value (=delta)**	11.06797181	8.273451517	6.755244876	5.066433657
20	**t(1-alpha, 1-sided)**	2.573803978	2.345647534	2.282174561	2.282174561
21	**t(1-alpha, 2-sided)**	2.998203428	2.674208684	2.585992031	2.585992031
22	**test, p-value (H01: μ1 ≥ μ0)**	0.9999992358	0.9999999493	0.9999998973	0.9999894555
23	**test, p-value (H02: μ1 ≤ μ0)**	7.642011941e-7	5.068466643e-8	1.026891697e-7	1.05444532e-5
24	**test, p-value (H03: μ1 = μ0)**	1.528402388e-6	1.013693329e-7	2.053783395e-7	2.108890639e-5
25	**μ1 - μ0, CI upper limit (1-sided)**	4.313908282	4.749005467	4.949998487	5.36666465
26	**μ1 - μ0, CI lower limit (1-sided)**	2.686091718	2.650994533	2.450001513	2.03333535
27	**μ1 - μ0, CI upper limit (2-sided)**	4.448115172	4.895942481	5.116406169	5.588541558
28	**μ1 - μ0, CI lower limit (2-sided)**	2.551884828	2.504057519	2.283593831	1.811458442
29	**μ1 - μ0, CI-length (2-sided)**	1.896230344	2.391884962	2.832812337	3.777083116
30					

The formula in the cell `B1`. is

```
=APY0(TEXTJOIN(" ",1,"from A06_UserlibExamplesPython.B29_InferentialStatistics.C01_BasicTests1Sample import D01_StudentT_
↪PValues $n importlib.reload(D01_StudentT_PValues) $n D01_StudentT_PValues.stats_student_t_1sample_test(n=",B3,", mu0=",B4,
↪", mean=",B5,", std=",B6,", alpha=", B7, B8, ")"," $n result='Students t-test, 1 sample'"))
```

This formula calls the function `stats_student_t_1sample_test` from the module `D01_StudentT_PValues` in the package `A06_UserlibExamplesPython.B29_InferentialStatistics.C01_BasicTests1Sample`. The parameters of this function are taken from the cells `B3` to `B8`. The result is a CSV file named `TTest1External.csv` which is written to the Output Monitor folder. The corresponding Python code with conventional formatting and substitution of the referenced cell values would look like this:

```
from A06_UserlibExamplesPython.B29_InferentialStatistics.C01_BasicTests1Sample import D01_StudentT_PValues
importlib.reload(D01_StudentT_PValues)
D01_StudentT_PValues.stats_student_t_1sample_test(n=[10, 20, 30], mu0=1.0, mean=[4.5,4.7], std=[1,2,3,14], alpha=0.015,␣
↪I=True, D=True, T=True, C=True, Onesided=True, Twosided=True, OutputMode='xlsx')
result='Students t-test, 1 sample'
```

Note

Here we are using `importlib.reload` to make sure that any changes in the code of the module `D01_StudentT_PValues` which may have occured since the last use of this spreadsheet function become effective without restarting the Python interpreter.

The cell `A3` contains `="n:"`, and the cell `B3` contains `="[10, 20, 30]"`. This passes the list `[10, 20, 30]` as the parameter `n` to the function `stats_student_t_1sample_test`.

The cell `A4` contains `="mu0:"`, and the cell `B4` contains `="1.0"`. This passes the value `1.0` as the parameter `mu0` to the function `stats_student_t_1sample_test`.

The cell `A5` contains `="mean:"`, and the cell `B5` contains `="[4.5,4.7]"`. This passes the list `[4.5,4.7]` as the parameter `mean` to the function `stats_student_t_1sample_test`.

The cell `A6` contains `="std:"`, and the cell `B6` contains `="[1,2,3,14]"`. This passes the list `[1,2,3,14]` as the parameter `std` to the function `stats_student_t_1sample_test`.

The cell `A7` contains `="alpha:"`, and the cell `B7` contains `="0.015"`. This passes the value `0.015` as the parameter `alpha` to the function `stats_student_t_1sample_test`.

The cell `A8` contains `="Options:"`, and the cell `B8` contains `=",I=True, D=True, T=True, C=True, Onesided=True, Twosided = True, OutputMode='csv'"`. This passes the options `I=True, D=True, T=True, C=True, Onesided=True, Twosided = True, OutputMode='xlsx'` as keyword arguments to the function `stats_student_t_1sample_test`.

To have the output displayed in the spreadsheet, follow these steps:

Select the cell where the output should start to be displayed (in this case, cell `A10`). In the main menu, click on `Sheet -> External Links...`. In the dialog "External Data", click on `Browse...`. In the dialog "Insert", select the file `TTest1External.xlsx` in the Output Monitor folder and click on `Open`.

Back in the dialog "External Data", check the box "Update every" and and set the time to 5 seconds. The output of the function `stats_student_t_1sample_test` will now be displayed in the spreadsheet, starting at the cell which was selected when opening the dialog "External Data". And because the option "Update every" is checked, the output will be updated every 5 seconds. If you change any of the parameters in cells `B3` to `B8`, the output will be updated accordingly.

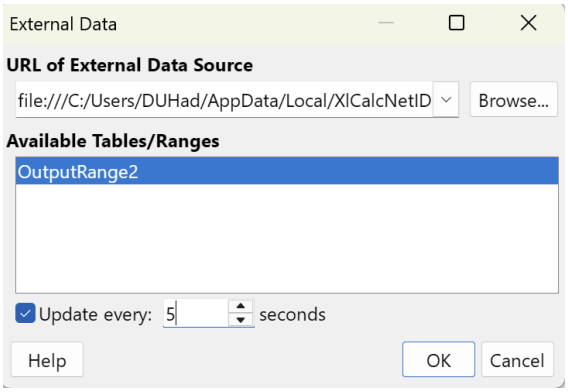

If later on you want to change the settings of the external link, click in the main menu on `Edit -> Links to External Files...`. In the dialog "Edit Links", select the link to the file `TTest1External.xlsx` and click on `Modify...`. This will open the dialog "External Data" again, where you can change the settings.

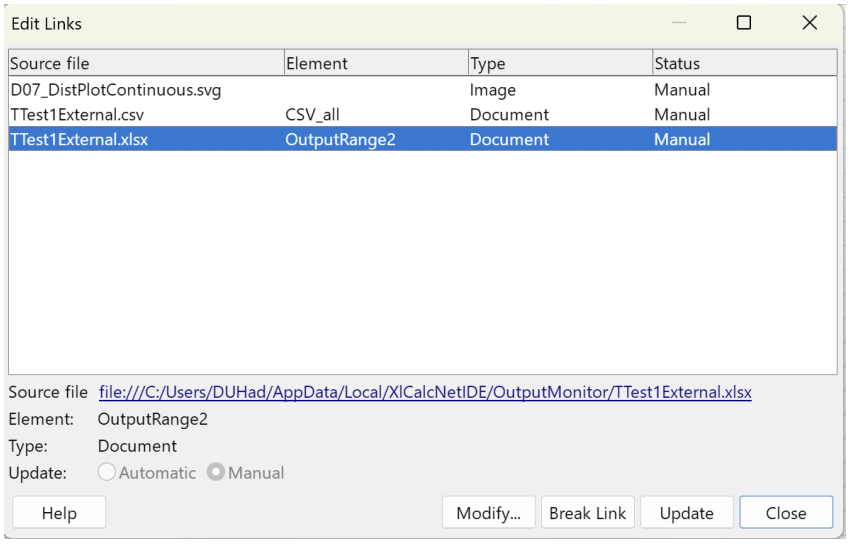

1.3.4.3 The worksheet "ExternalSVG"

The worksheet "ExternalSVG" demonstrates the use of a link to an external `*.svg` file in such a way that the output is displayed in the spreadsheet and is updated manually when the input data changes.

This is a snapshot of the worksheet "ExternalSVG" with the formula in cell `B1` and the output starting at cell `A10`. The output of the formula in cell `B1` is an SVG file named `D07_DistPlotContinuous.svg` which is written to the Output Monitor folder.

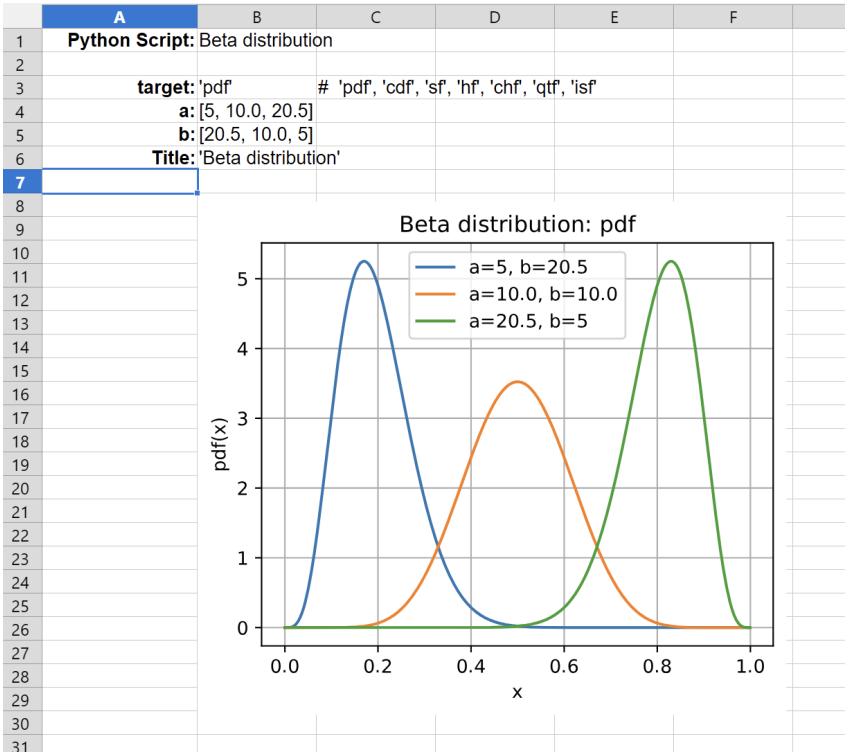

The formula in the cell `B1.` is

```
==APY0(TEXTJOIN(" ",1,"from A01_ExamplesPython.B18_FunctionsAndCurvesPlots.C01_Intro_Parametric2D import D07_
↪DistPlotContinuous $n importlib.reload(D07_DistPlotContinuous) $n D07_DistPlotContinuous.DistPlotBeta(target=",B3,", a=",
↪B4,", b=",B5,", Title=",B6,", OutputMode = 'svg'",  ")"," $n result='Beta distribution'"))
```

This formula calls the function `DistPlotBeta` from the module `D07_DistPlotContinuous` in the package `A01_ExamplesPython.B18_FunctionsAndCurvesPlots.C01_Intro_Parametric2D`. The parameters of this function are taken from the cells `B3` to `B8`. The result is a CSV file named `TTest1External.csv` which is written to the Output Monitor folder. The corresponding Python code with conventional formatting and substitution of the referenced cell values would look like this:

```
from A01_ExamplesPython.B18_FunctionsAndCurvesPlots.C01_Intro_Parametric2D import D07_DistPlotContinuous
importlib.reload(D07_DistPlotContinuous)
D07_DistPlotContinuous.DistPlotBeta(target='pdf', a=[5, 10.0, 20.5], b=[20.5, 10.0, 5], Title='Beta distribution',␣
↪OutputMode = 'svg')
result='Beta distribution'
```

Note

Here we are using `importlib.reload` to make sure that any changes in the code of the module `D07_DistPlotContinuous` which may have occured since the last use of this spreadsheet function become effective without restarting the Python interpreter.

The cell `A3` contains `="target:"`, and the cell `B3` contains `="pdf"`. This passes the string `"pdf"` as the parameter `target` to the function `DistPlotBeta`.

The cell `A4` contains `="a:"`, and the cell `B4` contains `="[5, 10.0, 20.5]"`. This passes This passes the list `[5, 10.0, 20.5]` as the parameter `a` to the function `DistPlotBeta`.

The cell `A5` contains `="b:"`, and the cell `B5` contains `="[20.5, 10.0, 5]"`. This passes the list `[20.5, 10.0, 5]` as the parameter `b` to the function `DistPlotBeta`.

The cell `A6` contains `="Title:"`, and the cell `B6` contains `="Beta distribution"`. This passes the string `"Beta distribution"`

as the keyword argument `Title` to the function `DistPlotBeta`.

To have the output displayed in the spreadsheet, follow these steps:

In the main menu, click on `Insert -> Image...`. In the dialog "Insert Image", select `Anchor: To page` and then select the file `D07_DistPlotContinuous.svg` in the Output Monitor folder and click on `Open`.

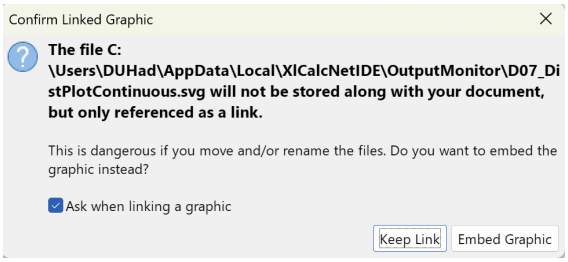

The "Confirm Linked Graphic" dialog will appear. Click on `Keep Link`.

Unfortunately, LibreOffice Calc does not allow to update the linked graphic automatically when the input parameters have changed and the modified `*.svg` file has been written to the Output Monitor folder.

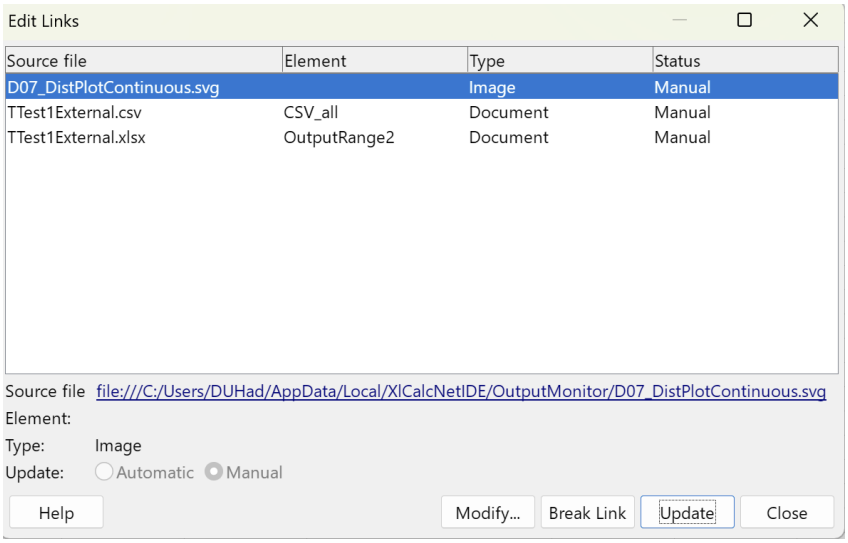

To manually update the linked graphic, click in the main menu on `Edit -> Links to External Files...`. In the dialog "Edit Links", select the link to the file `D07_DistPlotContinuous.svg` and click on `Update`. This will immediately display the updated graphic.

1.3.5 Managing procedures instead of functions

It is possible to call the spreadsheet functions `APY0` to `APY9` from LibreOffice Basic and to use this to start procedures instead of functions. A few simple examples have already been prepared to demonstrate the technique.

To access the relevant dialog, click on the XlCalcNet logo (in orange) on the main menu bar:

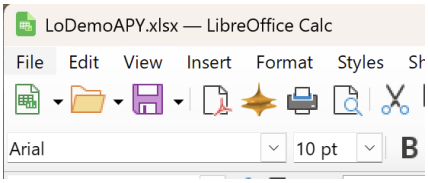

The following dialog box with the title **Navigator for XlCalcNet** will appear:

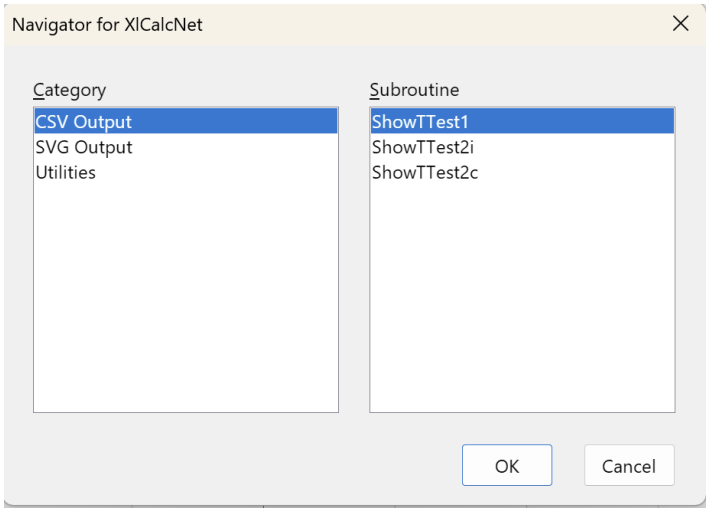

The first example, with `CSV Output` in "Category" and `ShowTTest1` in "Subroutine", will write a CSV file into the `XlCalcNetIDE\OutputMonitor` folder in the AppDataLocal folder. In order to see it, we need to open the `Output Monitor` application: start the `Tiny IDE` by clicking on its icon in the task bar, and in the main menu, click on `Tools -> Start Output Monitor`. With the `Output Monitor` application running, click `OK`. The CSV file will then immediately appear in the `Output Monitor`.

The corresponding code in the module `MpFunlabLocal -> BasicAndDialogs` is shown below:

```
Sub ShowTTest1()
    REM Output (a .csv file) is shown in output monitor
    fa = createUnoService("com.sun.star.sheet.FunctionAccess")
    Code = "from A06_UserlibExamplesPython.B29_InferentialStatistics.C01_BasicTests1Sample import D01_StudentT_PValues;"
    Code = Code + "D01_StudentT_PValues.demo_stats_student_t_1sample_test(); result='Done';"
    ResultArray = fa.callFunction("APY0", Array(Code))
    result = ResultArray(0)(0)
End Sub
```

The second example, with `SVG Output` in "Category" and `ShowPolygon` in "Subroutine", will write a SVG file into the `XlCalcNetIDE\OutputMonitor` folder in the AppDataLocal folder. With the `Output Monitor` application running (see above), click `OK`. The SVG file will then immediately appear in the `Output Monitor`.

The corresponding code in the module `MpFunlabLocal -> BasicAndDialogs` is shown below:

```
Sub ShowPolygon()
    REM Graphics is shown in output monitor
    fa = createUnoService("com.sun.star.sheet.FunctionAccess")
    Code = "from A01_ExamplesPython.B18_FunctionsAndCurvesPlots.C02_BasicCurves import D01_RegularConvexPolygon;"
    Code = Code + "D01_RegularConvexPolygon.RegularConvexPolygon(OutputMode='svg'); result='Done';"
    ResultArray = fa.callFunction("APY0", Array(Code))
    result = ResultArray(0)(0)
End Sub
```

1.3.6 Exporting and uninstalling

1.3.6.1 Exporting changes in MpfunlabLocal to MpfunlabLocal.oxt

Changes which are made in the MpfunlabLocal library are stored in the script folders of LibreOffice and are not automatically saved to MpfunlabLocal.oxt. However, they can be exported to MpfunlabLocal.oxt, so that they are available for installation (re-installation at the current LibreOffice installation or new installation for another LibreOffice installation).

To export the MpfunlabLocal library to MpfunlabLocal.oxt, follow these steps: open the Macro Editor from the main menu of LibreOffice Calc: `Tools -> Macros -> Edit Macros...`. In the main menu of the Macro Editor, select `Dialogs -> Organize Dialogs`. In the dialog "Basic Macro Organizer" select the tab "Libraries". "Location" should be set to "My Macros & Dialogs" and "Library: Name" should be "MpFunlabLocal". Click on `Export...`. In the following dialog box select "Export as extension", and

click on OK. In the dialog "Export library as extension" navigate to the documents folder, and within this folder to DataXlCalcNet\SpreadsheetAddins\LibreOfficeCalc. Select MpfunlabLocal.oxt and click on Save. Confirm to replace. In the dialog "Basic Macro Organizer" click on Close. Then close the Macro Editor.

1.3.6.2 Uninstalling MpfunlabLocal.oxt and Mpfunlab.oxt

To uninstall these two extensions properly, following the correct order is important.

First start LibreOffice with administrator privileges: Right-click on the desktop icon of LibreOffice and select Run as administrator. In the following dialog, confirm that you want to proceed. In the LibreOffice desktop, open a Calc Spreadsheet. Open the Extension dialog from the main menu:Tools -> Extensions.... In the Extension dialog select MpFunlab.oxt, click the Remove button and click on OK in the confirmation dialog. Then click on the Close button in the Extension dialog. In the dialog Restart LibreOffice, click on Restart Now. This will close LibreOffice Calc and will open the general LibreOffice desktop. Exit LibreOffice.

Now uninstall MpfunlabLocal.oxt within a normally launched LibreOffice Calc (i.e. without administrator privileges): Open the Extension dialog from the main menu: Tools -> Extensions.... In the Extension dialog select MpfunlabLocal.oxt, click the Remove button and click on OK in the confirmation dialog. Then click on the Close button in the Extension dialog. In the dialog Restart LibreOffice, click on Restart Now. This will close LibreOffice Calc and will open the general LibreOffice desktop. Exit LibreOffice.

1.4 General user interface and functions

1.4.1 The Tiny Data Viewer

The "Tiny Data Viewer" application is started from the Tiny IDE: in the main menu, click on `Tools -> Tiny Data Viewer`. The screenshot below shows an example

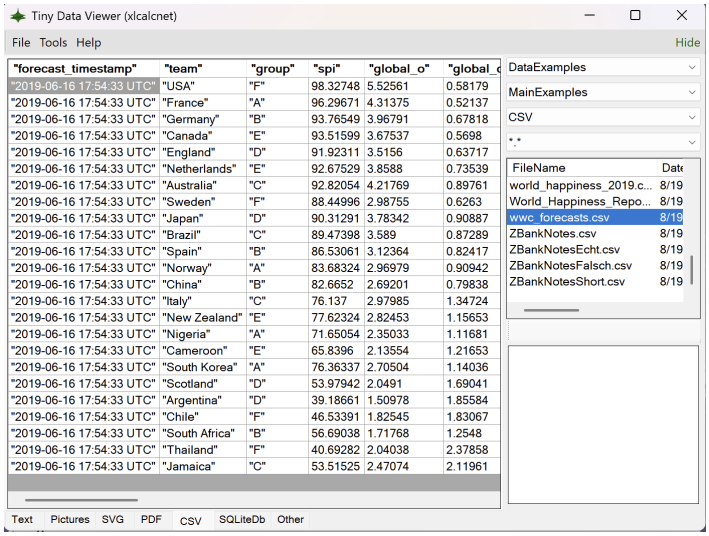

The "Tiny Data Viewer" application is designed around the structure of the `DataXlCalcNet` folder, making it easy to navigate and manage existing data sources, as well a new data provided by the user. The Tiny IDE can be used only to view data sources which are located in the `DataXlCalcNet` folder and are located in subfolders beginning with `Data`. The data source examples are organized in a tree structure, which is shown in the right panel (the "folder panel") of the "Tiny Data Viewer" application.

The left panel (the "data panel") of the "Gallery of Plots" application displays the data of the selected file. This panel has 7 tabs: "Text", "Pictures", "SVG", "PDF", "CSV", "SQLiteDb", "Other".

Each file in the `DataXlCalcNet\Data*` folders can be opened in the "Tiny Data Viewer" application by clicking on it. Per application instance, only one file can be opened and displayed at a time (to open an additional file, you need to start a new instance of the application: `Tools -> Tiny Data Viewer (external)`).

1.4.1.1 The menu bar of the application

The Menubar of the "Tiny Data Viewer" application contains the following menus: `File`, `Tools`, and `Help`. Each menu contains a number of items, which are described below.

There are also a button (with green foreground color) in the menu bar: the "Show/Hide" button, which toggles the visibility of the folder panel.

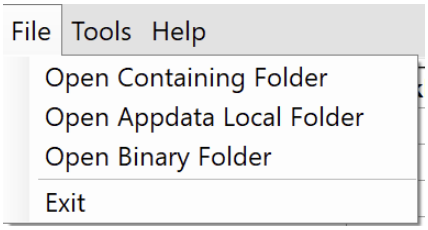

In the `File` menu, two standard items are missing: "New" and "Open".

The "New" item is missing because the application is designed to view existing data, not to create new data.

The "Open" item (which would typically open a dialog box with the functionally of the Windows Explorer) is missing because the "Tiny Data Viewer" application is limited to the `DataXlCalcNet` folder. Instead the folder panel allows to navigate through the `DataXlCalcNet` folder and open any file in it.

Renaming or deleting files and folders is possible, but should be done with care, using the Windows Explorer. After these changes, when returning to the Tiny IDE, the tree structure will not be updated automatically, but has to be updated manually by clicking on the appropriate parent folder in the tree structure.

`Open Containing Folder` opens the Windows Explorer in the folder of the current file. This is useful for quickly accessing other files in the same folder, or for deleting files and folders.

`Open Appdata Local Folder` opens the Windows Explorer in the `AppData\Local\XlCalcNetIDE` folder. This is useful for quickly accessing files and folders which are generated by running Python or C# code examples in the Tiny IDE.

`Open Binary Folder` opens the Windows Explorer in the `Bin` subfolder of the `XlCalcNet` installation. This is useful mostly for debugging purposes.

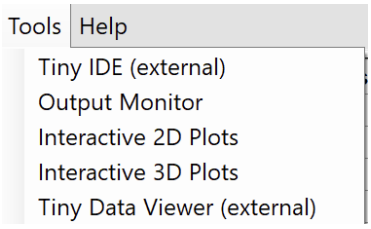

`Tiny IDE (external)` starts the Tiny IDE application, see *here* for details.

`Output Monitor` starts the "Output Monitor" application, see *here* for details.

`Gallery of Plots` starts the "Gallery of Plots" application, see *here* for details.

`Interactive 3D Wpf Plots` starts an additional the Interactive 3D Wpf Plots application, see *here* for details.

`Tiny Data Viewer (external)` starts an additional instance of the Tiny Data Viewer application, see *here* for details.

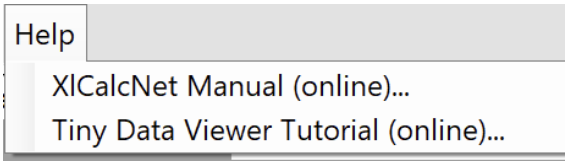

In the `Help` menu, `XlCalcNet Manual (online)...` displays the start page of the XlCalcNet online manual in a web browser.

`Tiny Data Viewer Tutorial (online)...` displays the section of the XlCalcNet.online manual which explains the use of the Tiny Data Viewer application in a web browser.

1.4.1.2 Source code

The C# source code for the data viewer can be found here: https://github.com/duhadler/XlCalcNet/tree/master/xlcalcnet/Addin/NET48/Source/DataViewer

1.4.2 The Output Monitor

The "Output Monitor" application is started from the Tiny IDE: in the main menu, click on `Tools -> Output Monitor`. The screenshot below shows an example

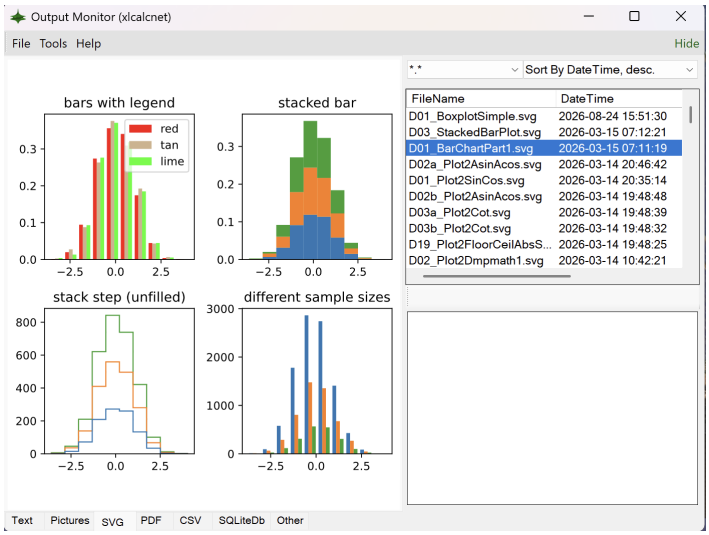

The "Output Monitor" application is designed to be used together with spreadsheet functions, when the output is a table or a graphics file, and it it not convenient to incorporate the output into the spreadsheet right away.

The folder which is monitored is `PathToLocalAppDara\\XlCalcNetIDE\OutputMonitor`. Whenever a file changes or is newly created in this folder, the "Output Monitor" application is updated.

The Tiny IDE can be used only to view data which are located in the `OutputMonitor` folder. The files in this folder are organized in a tree structure, which is shown in the right panel (the "folder panel") of the "Output Monitor" application.

The left panel (the "data panel") of the "Gallery of Plots" application displays the data of the selected file. This panel has 7 tabs: "Text", "Pictures", "SVG", "PDF", "CSV", "SQLiteDb", "Other".

Each file in the `DataXlCalcNet\Data*` folders can be opened in the "Output Monitor" application by clicking on it. Per application instance, only one file can be opened and displayed at a time (to open an additional file, you need to start a new instance of the application: `Tools -> Output Monitor (external)`).

1.4.2.1 The menu bar of the application

The Menubar of the "Output Monitor" application contains the following menus: `File`, `Tools`, and `Help`. Each menu contains a number of items, which are described below.

There are also a button (with green foreground color) in the menu bar: the "Show/Hide" button, which toggles the visibility of the folder panel.

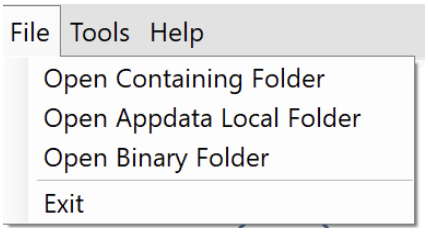

In the `File` menu, two standard items are missing: "New" and "Open".

The "New" item is missing because the application is designed to view existing data, not to create new data.

The "Open" item (which would typically open a dialog box with the functionally of the Windows Explorer) is missing because the "Output Monitor" application limited to the `OutputMonitor` folder. Instead the folder panel allows to navigate through the `DataXlCalcNet` folder and open any file in it.

Renaming or deleting files and folders is possible, but should be done with care, using the Windows Explorer. After these changes, when returning to the "Output Monitor" application, the "Output Monitor" application is updated automatically.

`Open Containing Folder` opens the Windows Explorer in the folder of the current file. This is useful for quickly accessing other files in the same folder, or for deleting files.

`Open Appdata Local Folder` opens the Windows Explorer in the `AppData\Local\XlCalcNetIDE` folder. This is useful for quickly accessing files and folders which are generated by running Python or C# code examples in the Tiny IDE.

`Open Binary Folder` opens the Windows Explorer in the `Bin` subfolder of the `XlCalcNet` installation. This is useful mostly for debugging purposes.

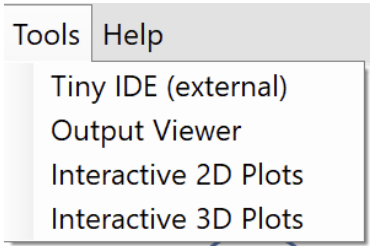

`Tiny IDE` starts the Tiny IDE application, see *here* for details.

`Output Monitor (external)` starts an additional instance of the the "Output Monitor" application, see *here* for details.

`Gallery of Plots` starts the gallery of plots application, see *here* for details.

`Interactive 3D Wpf Plots` starts an additional the Interactive 3D Wpf Plots application, see *here* for details.

`Tiny Data Viewer` starts the Tiny Data Viewer application, see *here* for details.



In the `Help` menu, `XlCalcNet Manual (online)...` displays the start page of the XlCalcNet online manual in a web browser.

`Tiny Data Viewer Tutorial (online)...` displays the section of the XlCalcNet.online manual which explains the use of the Tiny Data Viewer application in a web browser.

1.4.2.2 Source code

The C# source code for the output monitor can be found here: https://github.com/duhadler/XlCalcNet/tree/master/xlcalcnet/Addin/NET48/Source/OutputMonitor

1.4.3 The Gallery of Plots

The "Gallery of Plots" application is started from the Tiny IDE: in the main menu, click on `Tools -> Gallery of Plots`. The screenshot below shows an example

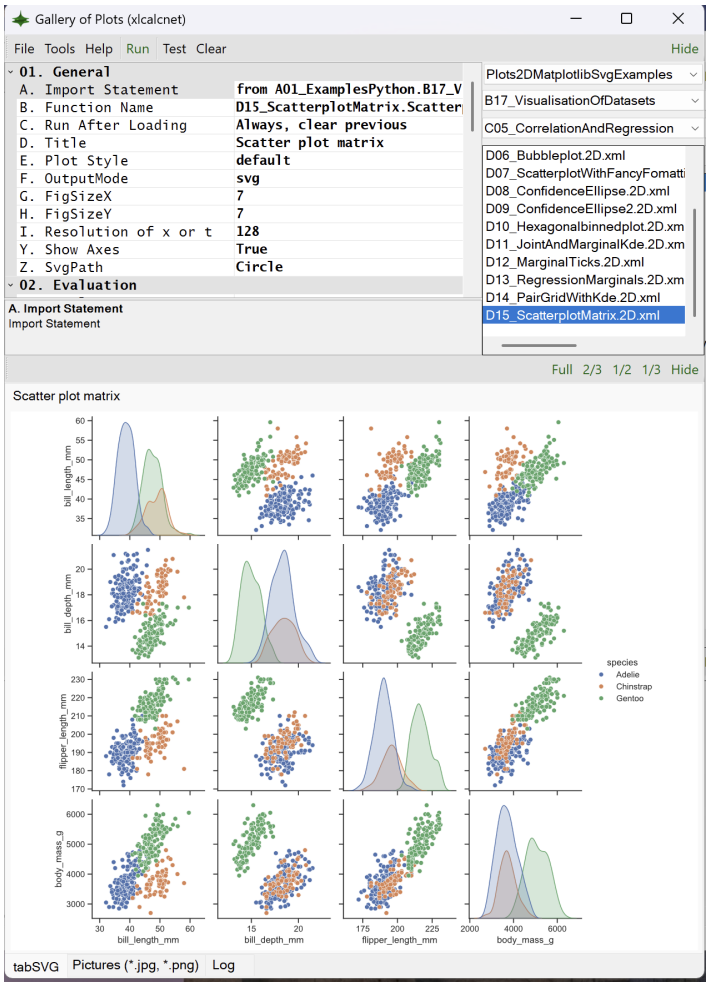

The "Gallery of Plots" application is designed around the structure of the `DataXlCalcNet` folder, making it easy to navigate and manage existing plot definition examples, as well a new plot definitions written by the user. This application can be used only to edit and run plot definition examples which are located in the `DataXlCalcNet` folder and are located in subfolders beginning with `GalleryOfPlots`. The plot definition examples are organized in a tree structure, which is shown in the top right panel (the "folder panel") of the "Gallery of Plots" application.

The top left panel (the "plot definition editor panel") of the application shows the plot definition of the selected file, which can be edited and run. The plot definition is stored as an *.xml* file, but is edited in a property grid. This allows to structure the definition and to use of drop down boxes to make the definition of the plot easier.

The output of the program is shown in the bottom panel (the "output panel") of the application, which has 3 tabs: the "SVG" tab, the "Pictures" tab, the "Log" tab.

Each file in the `DataXlCalcNet\GalleryOfPlots*` folders can be opened in the application by clicking on it. Per application instance, only one file can be opened, edited and run at a time (to open an additional file, you need to start a new instance of the "Gallery of Plots" application: `Tools -> "Gallery of Plots" application (external)`). The application will load this file into the editor, and the plot definition can be edited and run. To run the plot definition, click on the "Run" button in the main menu. The output is shown in the output panel.

The ordering and naming of the code examples in the subfolder `Plots3DWpfExamples` match the ordering and naming of the corre-

sponding chapters, sections and subsections in this manual, making it easy to find the code example which corresponds to a specific section of the manual. The "section help" feature (`Help -> Section Help`), which is available in the main menu of the "Gallery of Plots" application and opens the corresponding section of this manual in a web browser, depends on this ordering and naming.

1.4.3.1 The menu bar of the application

The Menubar of the "Gallery of Plots" application contains the following menus: `File`, `Tools`, and `Help`. Each menu contains a number of items, which are described below.

There are also two buttons (with green foreground color) in the menu bar: the "Run" button, which runs the code of the current file, and the "Show/Hide" button, which toggles the visibility of the folder panel.

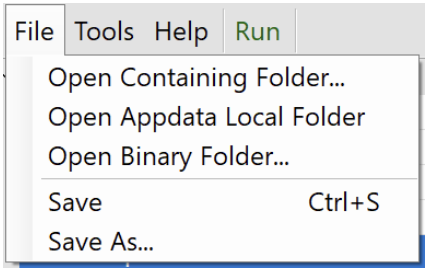

In the `File` menu, two standard items are missing: "New" and "Open".

The "New" item is missing because the Tiny IDE is designed to work within the `DataXlCalcNet` folder, and therefore new files which are not in the current folder should be created in the appropriate subfolders of `DataXlCalcNet`, which often have to be created manually first using the Windows Explorer.

There is, however, a `Save As` item in the file menu, which allows to save the current file under a new name in the current folder. This is useful for creating a copy of an existing file, and using this as a starting point for a new file.

The "Open" item (which would typically open a dialog box with the functionally of the Windows Explorer) is missing because the Tiny IDE is limited to the `DataXlCalcNet` folder. Instead the folder panel allows to navigate through the `DataXlCalcNet` folder and open any file in it.

Renaming or deleting files and folders is possible, but should be done with care, using the Windows Explorer, and not using the Tiny IDE. After these changes, when returning to the Tiny IDE, the tree structure will not be updated automatically, but has to be updated manually by clicking on the appropriate parent folder in the tree structure.

`Open Containing Folder` opens the Windows Explorer in the folder of the current file. This is useful for quickly accessing other files in the same folder, or for deleting files and folders.

`Open Appdata Local Folder` opens the Windows Explorer in the `AppData\Local\XlCalcNetIDE` folder. This is useful for quickly accessing files and folders which are generated by running Python or C# code examples in the Tiny IDE.

`Open Binary Folder` opens the Windows Explorer in the `Bin` subfolder of the `XlCalcNet` installation. This is useful mostly for debugging purposes.

`Save` will just save the current file without any further action. `Save As` has been descibed above. `Exit` will close the Tiny IDE.

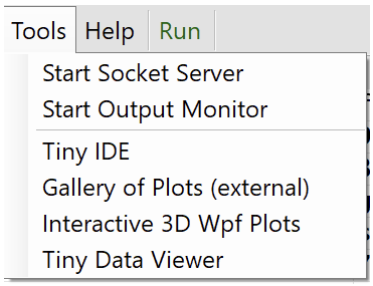

`Start Socket Server` starts the socket server, see *here* for details.

`Start Output Monitor` starts the output monitor application, see *here* for details.

`Tiny IDE` starts the Tiny IDE application, see *here* for details.

`Gallery of Plots` starts the gallery of plots application, see *here* for details.

`Interactive 3D Wpf Plots` starts the Interactive 3D Wpf Plots application, see *here* for details.

`Tiny Data Viewer` starts the Tiny Data Viewer application, see *here* for details.



In the `Help` menu, `XlCalcNet Manual (online)...` displays the start page of the XlCalcNet online manual in a web browser.

`XlCalcNet Section Help (online)...` displays the section of the XlCalcNet.online manual which corresponds to the current file in a web browser.

`Interactive 3D plots Tutorial (online)...` displays the section of the XlCalcNet.online manual which explains the use of the Interactive 3D plots application in a web browser.

1.4.3.2 The General section in the edtior property grit

As described above, the plot definition is edited in a property grid:

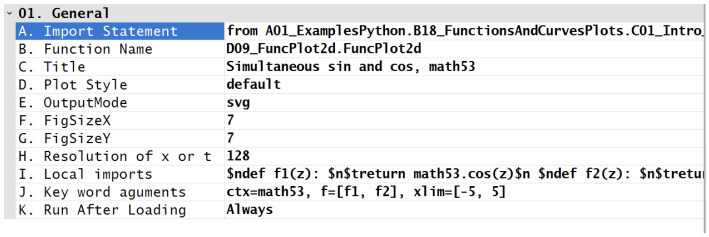

The example above shows the plot definition of the file `\GalleryOfPlotsExamples\B18_FunctionsAndCurvesPlots\C01_Intro_Parametric2D\D09b_SinCosMath53.2D.xml`.



A. Import Statement contains the import statement.

B. Function Name contains the function name.

C. Title contains the function title.

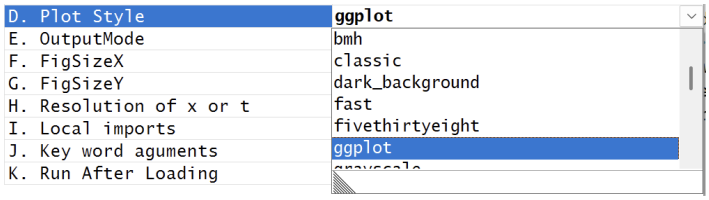

D. PlotStyle contains the plotstyle (see above).



E. OutputMode contains the Output Mode (see above).

G. FigSizeX contains the size of the figure in x (horizontal) direction.

F. FigSizeY contains the size of the figure in y (vertical) direction.

H. Resolution of x or t contains the resolution of x or t.

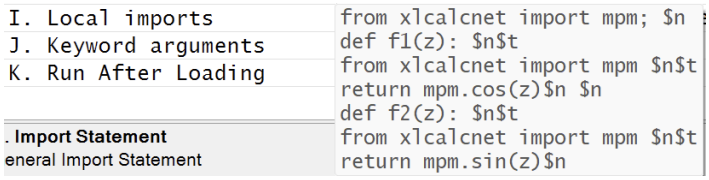

I. Local imports contains the local imports and definitions before the function call.



J. Keyword arguments contains the which passed to function.

Some text

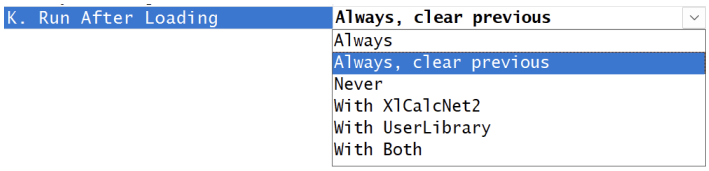

K. Run After loading determines whether and how the plot definition is run after loading (see above).

1.4.3.3 Source code

The C# source code for the gallery of plots can be found here: https://github.com/duhadler/XlCalcNet/tree/master/xlcalcnet/Addin/NET48/Source/TinyPlot2D

1.4.4 Interactive 3D wpf plots

The "Interactive 3D Wpf Plots" application is started from the Tiny IDE: in the main menu, click on `Tools -> Interactive 3D Wpf Plots`. The screenshot below shows an example

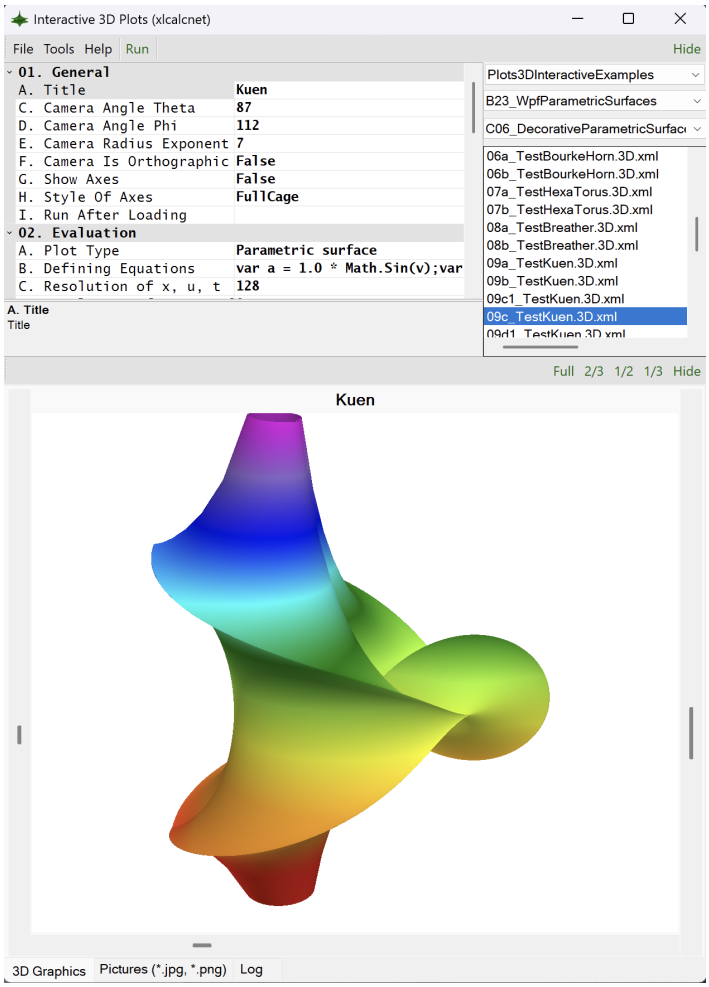

The "Interactive 3D Wpf Plots" application is designed around the structure of the `DataXlCalcNet` folder, making it easy to navigate and manage existing 3D plot definition examples, as well a new definitions written by the user. This application can be used only to edit and run 3D plot definition examples which are located in the `DataXlCalcNet` folder and are located in subfolders beginning with `Plots3D`. The code examples are organized in a tree structure, which is shown in the top right panel (the "folder panel") of the application.

The top left panel (the "3D plot definition editor panel") of the application shows the 3D plot definition of the selected file, which can be edited and run. The 3D plot definition is stored as an *.xml* file, but is edited in a property grid. This allows to structure the definition in the sections `0.1 General`, `02. Evaluation`, `03. Reshaping`, `Formatting`, and to use drop down menus to make the definition of the 3D plot easier.

The output of the program is shown in the bottom panel (the "output panel") of the application, which has 3 tabs: the "3D graphics" tab, which displays the interactive 3D plot; the "Pictures" tab, which shows available pictures which can be used as textures; and the "Log" tab, which documents the progress of compiling and running the code containing the "Defining Equations" and the "Expression Evaluator" (and also displays warning and error messages).

Each file in the `DataXlCalcNet\Plots3D*` folders can be opened in the application by clicking on it. Per application instance, only one file can be opened, edited and run at a time (to open an additional file, you need to start a new instance of the application: `Tools -> Interactive 3D Wpf Plots`). The application will load this file into the 3D plot definition editor, and the 3D plot definition can be edited and run. To run the 3D plot definition, click on the "Run" button in the main menu. The output is shown in the output

panel.

The ordering and naming of the 3D plot definition examples in the subfolder `Plots3DWpfExamples` match the ordering and naming of the corresponding chapters, sections and subsections in this manual, making it easy to find the 3D plot definition example which corresponds to a specific section of the manual. The "section help" feature (`Help -> Section Help`), which is available in the main menu of the application and opens the corresponding section of this manual in a web browser, depends on this ordering and naming.

1.4.4.1 The menu bar of the application

The Menubar of the "Interactive 3D Wpf Plots" application contains the following menus: `File`, `Tools`, and `Help`. Each menu contains a number of items, which are described below.

There are also two buttons (with green foreground color) in the menu bar: the "Run" button, which runs the code of the current file, and the "Show/Hide" button, which toggles the visibility of the folder panel.

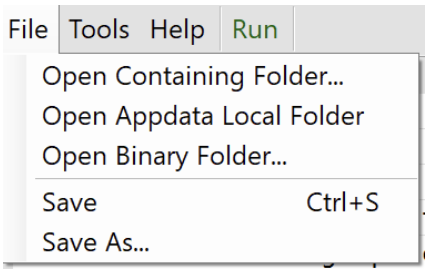

In the `File` menu, two standard items are missing: "New" and "Open".

The "New" item is missing because the Tiny IDE is designed to work within the `DataXlCalcNet` folder, and therefore new files which are not in the current folder should be created in the appropriate subfolders of `DataXlCalcNet`, which often have to be created manually first using the Windows Explorer.

There is, however, a `Save As` item in the file menu, which allows to save the current file under a new name in the current folder. This is useful for creating a copy of an existing file, and using this as a starting point for a new file.

The "Open" item (which would typically open a dialog box with the functionally of the Windows Explorer) is missing because the Tiny IDE is limited to the `DataXlCalcNet` folder. Instead the folder panel allows to navigate through the `DataXlCalcNet` folder and open any file in it.

Renaming or deleting files and folders is possible, but should be done with care, using the Windows Explorer, and not using the Tiny IDE. After these changes, when returning to the Tiny IDE, the tree structure will not be updated automatically, but has to be updated manually by clicking on the appropriate parent folder in the tree structure.

`Open Containing Folder` opens the Windows Explorer in the folder of the current file. This is useful for quickly accessing other files in the same folder, or for deleting files and folders.

`Open Appdata Local Folder` opens the Windows Explorer in the `AppData\Local\XlCalcNetIDE` folder. This is useful for quickly accessing files and folders which are generated by running Python or C# code examples in the Tiny IDE.

`Open Binary Folder` opens the Windows Explorer in the `Bin` subfolder of the `XlCalcNet` installation. This is useful mostly for debugging purposes.

`Save` will just save the current file without any further action. `Save As` has been descibed above. `Exit` will close the Tiny IDE.

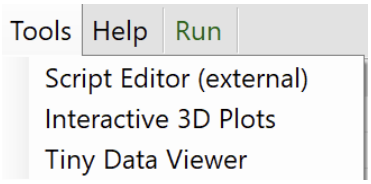

`Tiny IDE` starts the Tiny IDE application, see *here* for details.

`Output Monitor (external)` starts an additional instance of the the "Output Monitor" application, see *here* for details.

`Gallery of Plots` starts the gallery of plots application, see *here* for details.

`Interactive 3D Wpf Plots (external)` starts an additional the Interactive 3D Wpf Plots application, see *here* for details.

`Tiny Data Viewer` starts the Tiny Data Viewer application, see *here* for details.

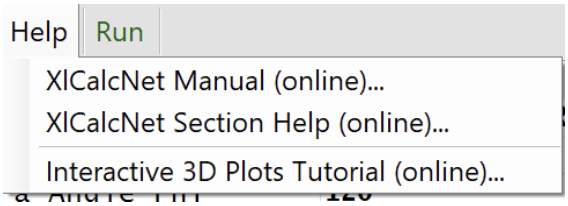

In the `Help` menu, `XlCalcNet Manual (online)...` displays the start page of the XlCalcNet online manual in a web browser.

`XlCalcNet Section Help (online)...` displays the section of the XlCalcNet.online manual which corresponds to the current file in a web browser.

`Interactive 3D plots Tutorial (online)...` displays the section of the XlCalcNet.online manual which explains the use of the Interactive 3D plots application in a web browser.

1.4.4.2 The context menus of the 3D plot definition editor



Right-clicking in the 3D plot definition editor opens a context menu, which provides quick access to



Right-clicking in the 3D Graphics tab in the output panel opens a context menu, which provides quick access to

1.4.4.3 The General section in the edtior property grit

The General section in the edtior property grit contains the following items:

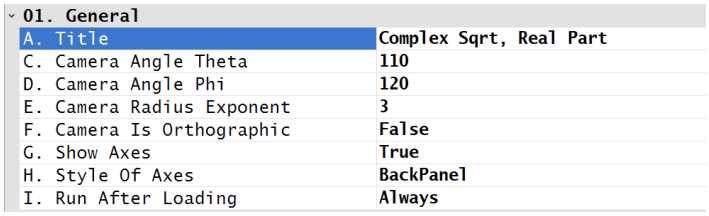

A. Title contains the title of the graphics

C. Camera Angle Theta contains the camera angle theta.

D. Camera Angle Phi contains the camera angle phi.

E. Camera Radius Exponent contains the camera radius exponent.

F. Camera Is Orthographic determines if the camera is orthographic or perspective.

G. Show Axes determines if axes are shown in the graphics.



H. Style Of Axes determines the style axes (if any).

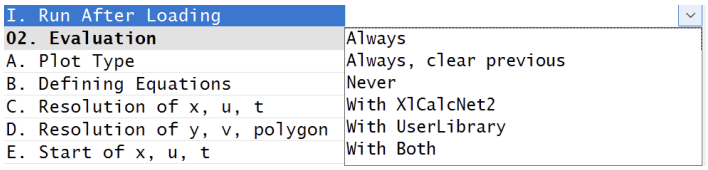

I. Run After Loading determines the action which occurs after loading the plot definition.

1.4.4.4 The Evaluation section in the edtior property grit

The Evaluation section in the edtior property grit contains the following items:

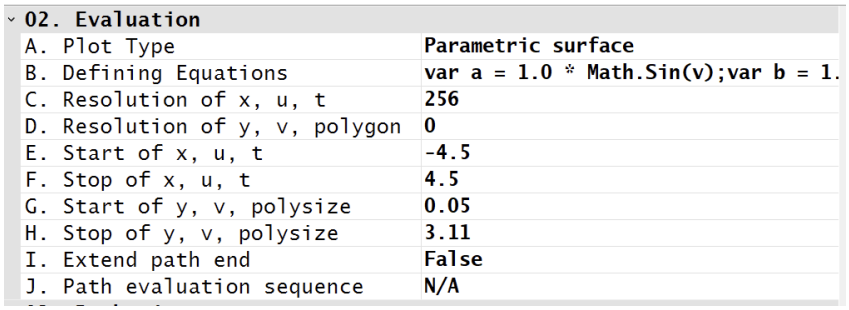

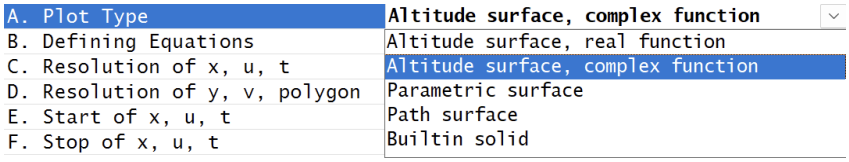

A. Plot Type determines the plot type.

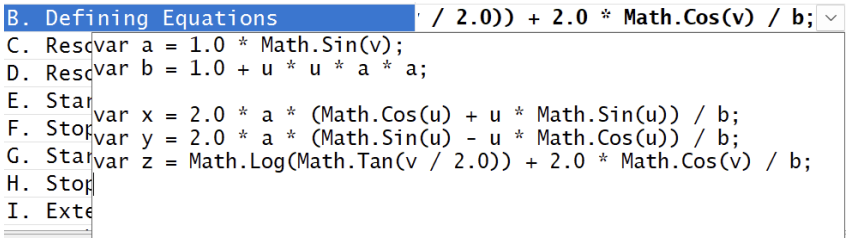

B. Defining equations contains the C# code for the equations which define the graphics.

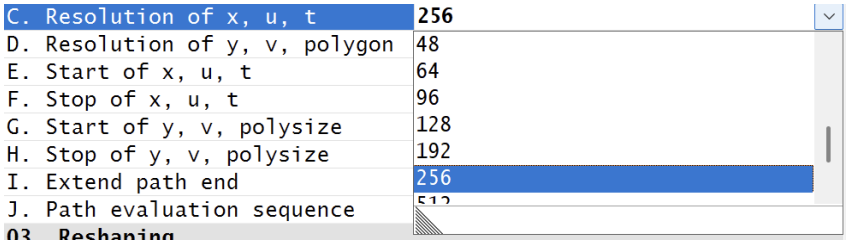

C. Resolution of x, u, t determines the resolution of the variable, x ,u or t, depending on the plot type.

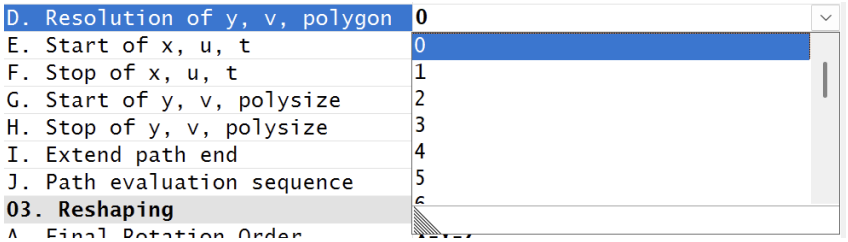

D. Resolution of y, v, polygon determines the resolution of the variable, y ,v or polygon, depending on the plot type.

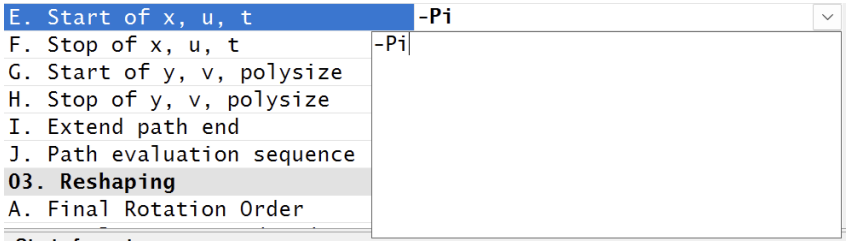

E. Start of x, u, t determines the start of the variable, x ,u or t, depending on the plot type.

F. Stop of x, u, t determines the stop of the variable, x ,u or t, depending on the plot type.

G. Start of y, v, polygon determines the start of the variable, y ,v or polygon, depending on the plot type.

H. Stop of y, v, polygon determines the stop of the variable, y ,v or polygon, depending on the plot type.

I. Extend path end determines if the path end is extended to close the path. Only relevant for path surfaces.

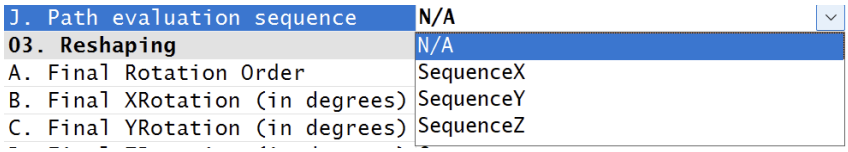

J. Path evaluation sequence determines the path sequence which is used for optimal results. Only relevant for path surfaces.

1.4.4.5 The Reshaping section in the edtior property grit

The Evaluation section in the edtior property grit contains the following items:

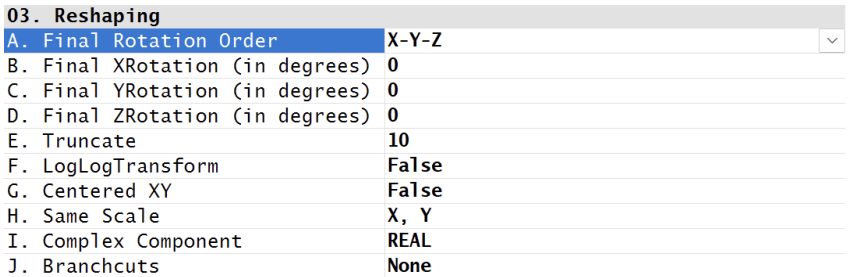

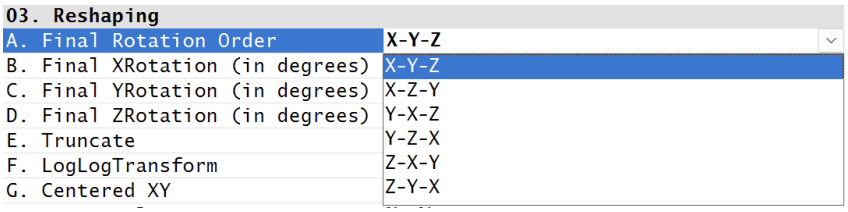

A. Final Rotation Order Sets the order for the final rotation (if any).

B. Final XRotation (in degrees) Rotation around the X axis (in degrees).

C. Final YRotation (in degrees) Rotation around the Y axis (in degrees).

D. Final ZRotation (in degrees) Rotation around the Z axis (in degrees).

E. Truncate Sets the truncation threshold for the Z axis.

F. LogLogTransform determines if the LogLog transform is applied.

G. Centered XY determines if x,y are centered or not.

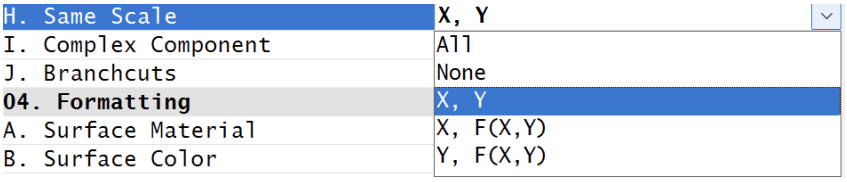

H. Same Scale determines which axes are using the same scale.

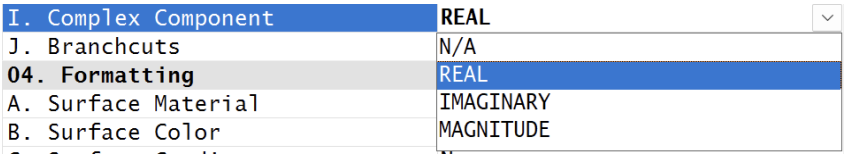

I. Complex Component determines which complex component is used. Only relevant if the plot type is Altitude surface, complex function.

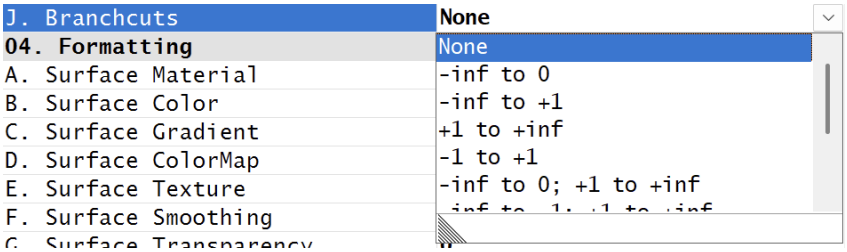

J. Branchcuts determines which brachcuts. Only relevant if the plot type is Altitude surface, complex function.

1.4.4.6 The Formatting section in the edtior property grit

The Formatting section in the edtior property grit contains the following items:

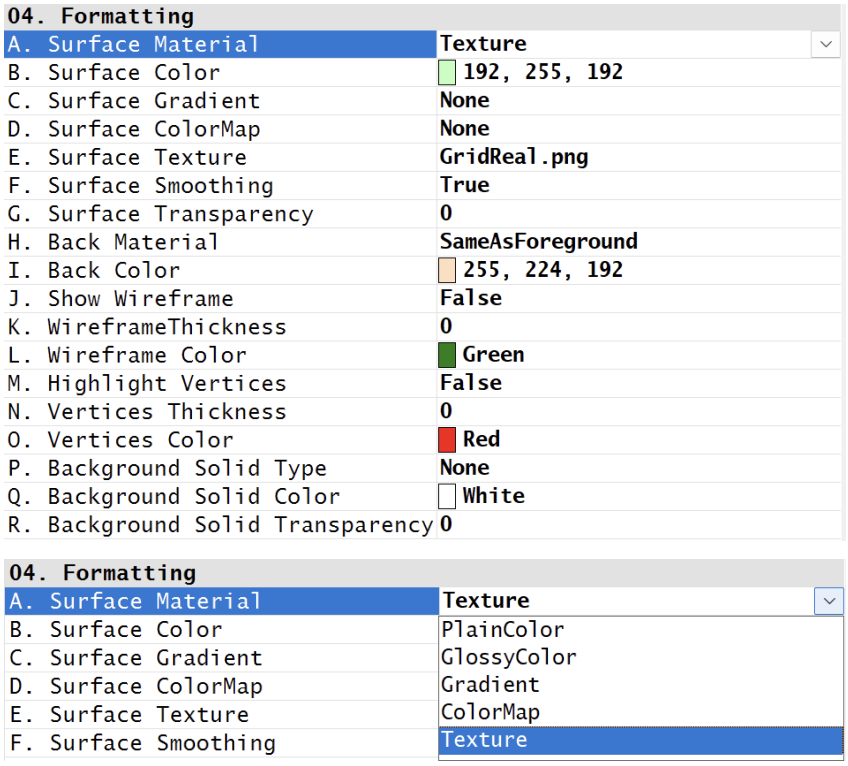

A. Surface Material determines which surface material is used.

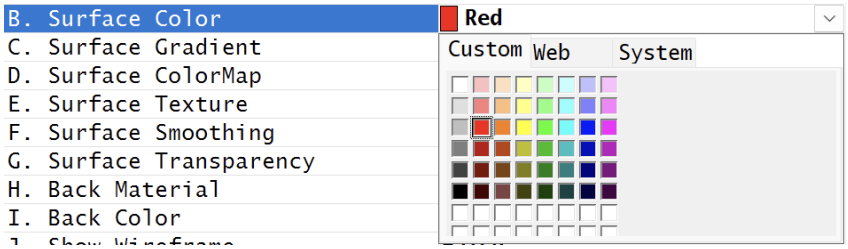

B. Surface Color determines which surface color is used. Note that there are 3 different tabs which can be used to choose the color. Only relevant the surface material is Plain Color or Glossy Color.

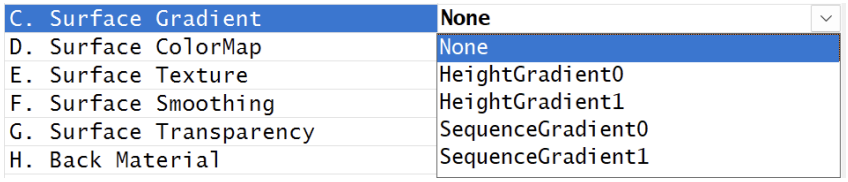

C. Surface Gradient determines which surface gradient is used.. Only relevant if the surface material is Gradient.

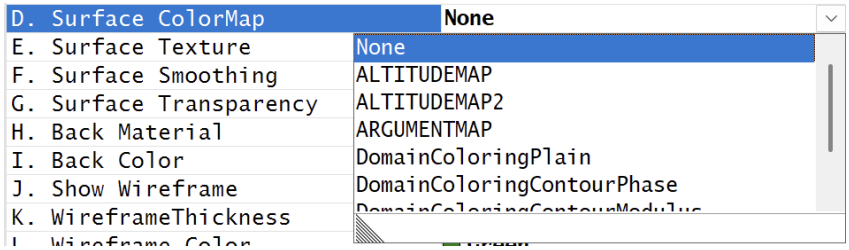

D. Surface ColorMap determines which surface colormap is used.. Only relevant if the surface material is ColorMap.

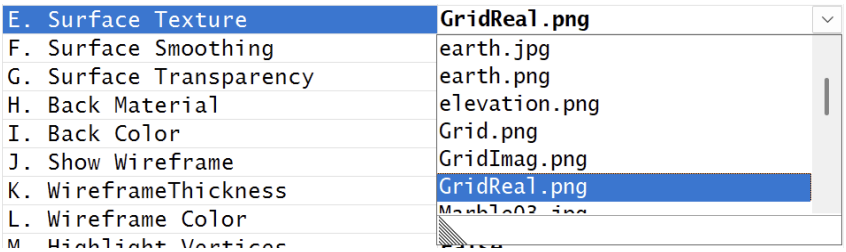

E. Surface Texture determines which texture is used.. Only relevant if the surface material is Texture.

F. Surface Smoothing determines if surface smoothing is applied.

G. Surface Transparency determines the amount of surface transparency (from o to 255).

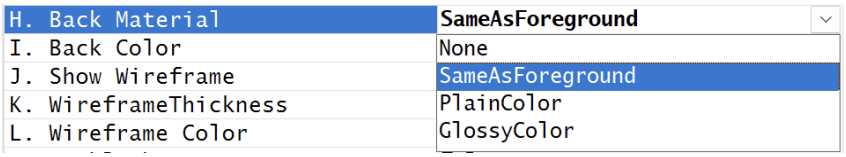

H. Back Material determines the background material.

I. Back Color determines the background color.

J. Show Wireframe determines if a wireframe is shown.

K. Wireframe Thickness determines the wireframe thickness.

L. Wireframe Color determines the wireframe color.

M. Highlight Vertices determines if vertices are highlighted.

N. Vertices Thickness determines the thickness of the vertices.

O. Vertices Color determines the color of the vertices.

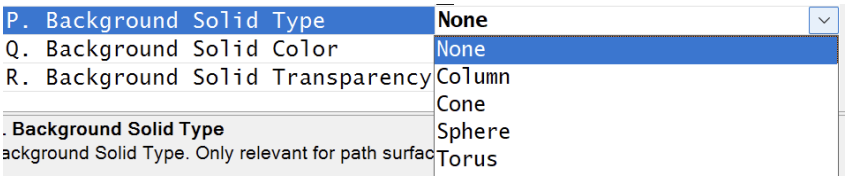

P. Background Solid Type determines the type of the background, if any.

Q. Background Solid color determines the color of the background, if any.

R. Background Solid Transparency determines the amount of surface transparency (from o to 255).

1.4.4.7 Source code

The Python source code for starting the IDE can be found here: https://github.com/duhadler/XlCalcNet/blob/master/xlcalcnet/ShowEditor.py

The C# source code for the gallery of plots can be found here: https://github.com/duhadler/XlCalcNet/tree/master/xlcalcnet/Addin/NET48/Source/TinyPlot3D

Much of the C# code of this application is based on Stephens [504].

1.4.5 Functions related to folders

There are several functions related to folders

gui.**get_local_appdata**()

Return the current user's local Application Data folder

```
>>> from xlcalcnet import gui
>>> gui.get_local_appdata()
```

gui.**get_local_appdata_xlcalcnet**()

Return the current user's local AppData/XlCalcNetIDE folder

```
>>> from xlcalcnet import gui
>>> gui.get_local_appdata_xlcalcnet()
```

gui.**get_my_documents**()

Return the current user's local AppData/XlCalcNetIDE folder

```
>>> from xlcalcnet import gui
>>> gui.get_my_documents()
```

1.4.6 Information about installation status of supporting python packages

gui.**info**()

Support for Matplotlib output in a separate process

```
>>> from xlcalcnet import gui
>>> gui.info()
```

gui.**has_gpm**()

Returns True if gmpy2 is installed

```
>>> from xlcalcnet import gui
>>> gui.has_gpm()
```

gui.**has_apm**()

Returns True if python-flint is installed

```
>>> from xlcalcnet import gui
>>> gui.has_apm()
```

gui.**has_xlcalcnet2**()

Returns True if xlcalcnet2 is installed

```
>>> from xlcalcnet import gui
>>> gui.has_xlcalcnet2()
```

1.4.7 Information about context lists, and setting global precision

property gui.**ctxlistreal**

Returns a list of all available numerical contexts supporting real data types

```
>>> from xlcalcnet import gui
>>> gui.ctxlistreal
```

property gui.**ctxlistcplx**

Returns a list of all available numerical contexts supporting complex data types

```
>>> from xlcalcnet import gui
>>> gui.ctxlistcomplex
```

gui.**setdps**(*dps*)

Sets the decimal precision for all multiprecision data types

```
>>> from xlcalcnet import gui
>>> dps = 50
>>> gui.setdps(dps)
```

1.4.8 Support for running interactive Matplotlib output in a separate process

There is support for Matplotlib output in a separate process

See also: https://matplotlib.org/stable/users/explain/figure/interactive.html#default-ui

property gui.**plot**(*fig*, *file*, *fname*)

Support for Matplotlib output in a separate process

```
>>> from xlcalcnet import gui
>>> gui.plot(fig, file, fname)
```

1.5 Mathematical functions based on Mpmath, Gmpy2 and Python-Flint (only Python)

1.5.1 Overview

1.5.1.1 Contexts

The following group of contexts are available in Python only:

- Context group `ctx_pm`: this context group includes `fpm` (see *fpm*), `mpm` (see *mpm*), `dpm` (see *dpm*), `ipm` (see *ipm*), `gpm` (see *gpm*), `apm` (see *apm*). The `gpm` context is only available if Gmpy2 is installed, and the `apm` context is only available if Python-FLINT is installed.

XlCalcNet provides the following contexts from mpmath:

- Double-precision binary floating point arithmetic using Python's builtin `float` and `complex` types (`fp`)
- Arbitrary-precision binary floating point arithmetic (`mp`)
- Arbitrary-precision binary interval arithmetic (`iv`)

and in addition

- Arbitrary-precision decimal arithmetic (`dp`)
- Arbitrary-precision binary floating point arithmetic based on gmpy2 (`gp`): requires gmpy2
- Arbitrary-precision ball arithmetic based on ARB (`ap`): requires xlcalcnet libraries

The implementation of contexts in xlcalcnet extents and sometimes modifies the features of the contexts provided by mpmath; in this manual, changes to features already existing in mpmath will be pointed out explicitly.

By and large, xlcalcnet tries to be compatible with mpmath conventions as much as possible. The main difference is that in xlcalcnet the context must always explicitly be stated, whereas in mpmath the `mp` context is assumed as the default if the context is missing. In mpmath, we can write:

```
>>> from xlcalcnet import *
>>> sqrt(2)
mpf('1.4142135623730951')
```

This does not work in xlcalcnet, where also the `mp` context has to be given explicitly:

```
>>> from xlcalcnet import mp
>>> mp.sqrt(2)
mpf('1.4142135623730951')
```

The need to import xlcalcnet and mpmath into the same module should rarely arise (importing them separately in different modules of the same project is of course fine). If both are imported, care should be taken that the imported components do not shadow each other, e.g.:

```
>>> from xlcalcnet import mp
>>> from xlcalcnet.mpmath import mp as mpm   # importing the mpmath version of xlcalcnet

>>> mp.sqrt(2) # calling xlcalcnet
mpf('1.4142135623730951')
>>> mpm.sqrt(2) # calling mpmath
mpf('1.4142135623730951')
```

1.5.1.2 Conversion of sclars

This function converts scalars into each other

`ctx.t`(*x*, *strings=True*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Converts *x* to an `ctx.mpf` or `ctx.mpc`. If *x* is of type `ctx.mpf`, `ctx.mpc`, `int`, `float`, `complex`, the conversion will be performed losslessly, except in the following cases:

- conversion of a double to a decimal: cutoff at 14 digits
- conversion of an int to a mpfr: cutoff at current precision

If *x* is a string, the result will be rounded to the present working precision. Strings representing fractions or complex numbers are permitted.

```
>>> from xlcalcnet import fpm, mpm, ipm, dec, gmp, apm; ctxall = [fpm, mpm, ipm, dec, gmp, apm]
>>> for ctx in ctxall:
>>> .... print(ctx.name)
>>> .... ctx.dps = 10; print([ctx.t(3.5), ctx.t(2+3j)])
>>> .... ctx.dps = 10; print([ctx.t('3.1'), ctx.t('3.1 + 4.6j')])
fpm
[3.5, (2+3j)]
[3.1, (3.1+4.6j)]

mpm
[mpf('3.5'), mpc(real='2.0', imag='3.0')]
[mpf('3.100000000006'), mpc(real='3.100000000006', imag='4.599999999977')]

ipm
[mpi('3.5', '3.5'), iv.mpc(mpi('2.0', '2.0'), mpi('3.0', '3.0'))]
[mpi('3.099999999977', '3.100000000006'),
iv.mpc(mpi('3.099999999977', '3.100000000006'), mpi('4.599999999977', '4.600000000035'))]

dec
:cite:t:`Decimal('3.5'), DecCplx('2 + 3.0j')]
:cite:t:`Decimal('3.1'), DecCplx('3.1 + 4.6j')]

gmp
[mpfr('3.5',37), mpc('2.0+3.0j',(37,37))]
[mpfr('3.100000000006',37), mpc('3.100000000006+4.599999999977j',(37,37))]

apm
[arb('3.50'), acb('2.00 + 3.00j')]
[arb('[3.09999999998 +/- 3.24e-11]'),
acb('[3.09999999998 +/- 3.24e-11] + [4.59999999998 +/- 6.15e-11]j')]
```

1.5.1.3 Precision in bits and digits

`ctx.prec` holds the current precision (in bits):

The default precision (in bits) for all contexts after starting xlcalcnet is `ctx.prec = 53`.

```
>>> fp.prec, mp.prec, iv.prec, dp.prec, gp.prec, ap.prec
(53, 53, 53, 53, 53, 53)
```

`ctx.dps` holds the current decimal precision (in digits):

The default decimal precision (in digits) for all contexts after starting xlcalcnet is `ctx.dps = 15`.

```
>>> fp.dps, mp.dps, iv.dps, dp.dps, gp.dps, ap.dps
(15, 15, 15, 15, 15, 15)
```

Like mpmath, xlcalcnet expects every devision of a *normal* number by zero to raise a `DivisionByZero`, and not to return `+inf` or `-inf`. This is the default behaviour for the `fp`, `mp`, `iv` and `dp` contexts anyway, and has been changed to follow this convention for the `gp` and `ap` context.

A number of algorithms use this exception to trigger a temporary increase of precision.

1.5.2 Double-precision arithmetic: fpm

The Python module fpm provides support for real and complex floating point numbers in double precision (see https://en.wikipedia.org/wiki/Double-precision_floating-point_format). The corresponding real and complex data types, float and complex, are implemented in hardware (and are therefore quite fast).

Note: automatic conversion from Double in .Net Framework to float

Note: no conversion from Complex in .Net Framework to complex in Python. Explain workarounds.

1.5.2.1 Examples for fpm, real input

General test code for Python can be found here

```
import math
from xlcalcnet import math53
from decimal import Decimal
from fractions import Fraction
i = 232945639845394856394563936482734638475398457398457 3
```

```
def main_tests():
    general_assignments()
    functions_with_argument_conversion()
    arithmetic_operators_with_math53()
```

General test code can be found here

```
def general_assignments():
    print()
    print('<H1 Title="General assignments and conversions">')

    x = ctx.t(i)
    print('x = ctx.t(i):', x)

    x = ctx.t(5.7)
    print('x = math53T(5.7):', x)

    x = ctx.t(5.7)
    print('x = math53T(5.7):', x)
    x0 = ctx.t(232945639845394856394563936482734 6)
    print('x0 = math53T(232945639845394856394563936482734 6', x0)
    x1 = ctx.t("232945639845394856394563936482734 6")
    print('x1 = ctx.t("232945639845394856394563936482734 6"):', x1)
    x = ctx.t("5.5")
    print('x = math53T("5.5"):', x)

    print()
    x = ctx.t(55)
    print('x = ctx.t(5):', x)
    y = ctx.exp(x)
    print('y = ctx.exp(x):', y)

    z = ctx.exp(5.5)
    print('z = ctx.exp(5.5):', z)
    z = ctx.exp(5)
    print('z = ctx.exp(5):', z)
    z = ctx.exp("5.5")
    print('z = ctx.exp("5.5"):', z)
    print('</H1>')
```

General test code can be found here

```
def functions_with_argument_conversion():
    print()
```

(continues on next page)

(continued from previous page)

```
    print('<H1 Title="Functions with argument conversion">')
    dec = Decimal(1) / Decimal(7)
    print('dec = Decimal(1) / Decimal(7):', dec)
    z = ctx.exp(dec)
    print('z = ctx.exp(dec):', z)
    frac = Fraction("-3/7")
    print('frac = Fraction("-3/7:")', frac)
    z = ctx.exp(frac)
    print('z = ctx.exp(frac):', z)

    print()
    x = ctx.t(5.5)
    print('x = ctx.t(55):', x)
    y = ctx.t(3.3)
    print('y = ctx.t(33):', y)
    z = ctx.pow(x, y)
    print('z = ctx.pow(x, y):        ', z)
    z = ctx.pow(5.5, 3.3)
    print('z = ctx.pow(5.5, 3.3):    ', z)
    z = ctx.pow("5.5", "3.3")
    print('z = ctx.pow("5.5", "3.3"):', z)
    z = ctx.pow(5, 3)
    print('z = ctx.pow(5, 3):', z)

    t = z + 3
    print('t = z + 3:', t)
    print('</H1>')
```

General test code can be found here

```
def arithmetic_operators_with_math53():
    print()
    print('<H1 Title="Arithmetic operators with math53">')

    x = ctx.t(5.0)
    y = ctx.t(2.5)
    print('x: ', x)
    print('y: ', y)

    res = x + y
    print('res = x + y:', res)
    res = y + x
    print('res = y + x:', res)

    res = x - y
    print('res = x - y:', res)
    res = y - x
    print('res = y - x:', res)

    res = x * y
    print('res = x * y:', res)
    res = y * x
    print('res = y * x:', res)

    res = x / y
    print('res = x / y:', res)
    res = y / x
    print('res = y / x:', res)
    print('</H1>')
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02a_FpmReal.py.

1.5.2.2 Examples for fpm, complex input

General test code for Python can be found here

```
import math
from xlcalcnet import math53
from decimal import Decimal
from fractions import Fraction
i = 232945639845394856394563936482734638475398457398457 3984573


def main_tests():
    general_assignments()
    functions_with_argument_conversion()
    arithmetic_operators_with_math53()
```

General test code can be found here

```
def general_assignments():
    print()
    print('<H1 Title="General assignments and conversions">')

    x = ctx.t(i)
    print('x = ctx.t(i):', x)

    x = ctx.t(5.7)
    print('x = math53T(5.7):', x)

    x = ctx.t(5.7)
    print('x = math53T(5.7):', x)
    x0 = ctx.t(232945639845394856394563936482734 6)
    print('x0 = math53T(232945639845394856394563936482734 6', x0)
    x1 = ctx.t("232945639845394856394563936482734 6")
    print('x1 = ctx.t("232945639845394856394563936482734 6"):', x1)
    x = ctx.t("5.5")
    print('x = math53T("5.5"):', x)

    print()
    x = ctx.t(55)
    print('x = ctx.t(5):', x)
    y = ctx.exp(x)
    print('y = ctx.exp(x):', y)

    z = ctx.exp(5.5)
    print('z = ctx.exp(5.5):', z)
    z = ctx.exp(5)
    print('z = ctx.exp(5):', z)
    z = ctx.exp("5.5")
    print('z = ctx.exp("5.5"):', z)
    print('</H1>')
```

General test code can be found here

```
def functions_with_argument_conversion():
    print()
    print('<H1 Title="Functions with argument conversion">')
    dec = Decimal(1) / Decimal(7)
    print('dec = Decimal(1) / Decimal(7):', dec)
    z = ctx.exp(dec)
    print('z = ctx.exp(dec):', z)
    frac = Fraction("-3/7")
    print('frac = Fraction("-3/7:")', frac)
    z = ctx.exp(frac)
    print('z = ctx.exp(frac):', z)

    print()
```

(continues on next page)

(continued from previous page)

```
    x = ctx.t(5.5)
    print('x = ctx.t(55):', x)
    y = ctx.t(3.3)
    print('y = ctx.t(33):', y)
    z = ctx.pow(x, y)
    print('z = ctx.pow(x, y):        ', z)
    z = ctx.pow(5.5, 3.3)
    print('z = ctx.pow(5.5, 3.3):    ', z)
    z = ctx.pow("5.5", "3.3")
    print('z = ctx.pow("5.5", "3.3"):', z)
    z = ctx.pow(5, 3)
    print('z = ctx.pow(5, 3):', z)

    t = z + 3
    print('t = z + 3:', t)
    print('</H1>')
```

General test code can be found here

```
def arithmetic_operators_with_math53():
    print()
    print('<H1 Title="Arithmetic operators with math53">')

    x = ctx.t(5.0)
    y = ctx.t(2.5)
    print('x: ', x)
    print('y: ', y)

    res = x + y
    print('res = x + y:', res)
    res = y + x
    print('res = y + x:', res)

    res = x - y
    print('res = x - y:', res)
    res = y - x
    print('res = y - x:', res)

    res = x * y
    print('res = x * y:', res)
    res = y * x
    print('res = y * x:', res)

    res = x / y
    print('res = x / y:', res)
    res = y / x
    print('res = y / x:', res)
    print('</H1>')
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02b_FpmCplx.py.

1.5.2.3 Implementation in Python

The Python source code for this module can be found here: ctx_fpm.py.

1.5.3 Binary floating-point with arbitrary-precision and exponent: mpm

The Python module mpm provides support for real and complex floating point numbers with arbitrary-precision and exponent. The corresponding real and complex data types, float and complex, are implemented in software.

1.5.3.1 Examples for mpm, real input

General test code for Python can be found here

```
import math
from xlcalcnet import math53
from decimal import Decimal
from fractions import Fraction
i = 232945639845394856394563936482734638475398457398457 3
```

```
def main_tests():
    general_assignments()
    functions_with_argument_conversion()
    arithmetic_operators_with_math53()
```

General test code can be found here

```
def general_assignments():
    print()
    print('<H1 Title="General assignments and conversions">')

    x = ctx.t(i)
    print('x = ctx.t(i):', x)

    x = ctx.t(5.7)
    print('x = math53T(5.7):', x)

    x = ctx.t(5.7)
    print('x = math53T(5.7):', x)
    x0 = ctx.t(232945639845394856394563936482734 6)
    print('x0 = math53T(232945639845394856394563936482734 6', x0)
    x1 = ctx.t("232945639845394856394563936482734 6")
    print('x1 = ctx.t("232945639845394856394563936482734 6"):', x1)
    x = ctx.t("5.5")
    print('x = math53T("5.5"):', x)

    print()
    x = ctx.t(55)
    print('x = ctx.t(5):', x)
    y = ctx.exp(x)
    print('y = ctx.exp(x):', y)

    z = ctx.exp(5.5)
    print('z = ctx.exp(5.5):', z)
    z = ctx.exp(5)
    print('z = ctx.exp(5):', z)
    z = ctx.exp("5.5")
    print('z = ctx.exp("5.5"):', z)
    print('</H1>')
```

General test code can be found here

```
def functions_with_argument_conversion():
    print()
    print('<H1 Title="Functions with argument conversion">')
    dec = Decimal(1) / Decimal(7)
    print('dec = Decimal(1) / Decimal(7):', dec)
    z = ctx.exp(dec)
    print('z = ctx.exp(dec):', z)
```

(continues on next page)

(continued from previous page)

```
    frac = Fraction("-3/7")
    print('frac = Fraction("-3/7:")', frac)
    z = ctx.exp(frac)
    print('z = ctx.exp(frac):', z)

    print()
    x = ctx.t(5.5)
    print('x = ctx.t(55):', x)
    y = ctx.t(3.3)
    print('y = ctx.t(33):', y)
    z = ctx.pow(x, y)
    print('z = ctx.pow(x, y):        ', z)
    z = ctx.pow(5.5, 3.3)
    print('z = ctx.pow(5.5, 3.3):    ', z)
    z = ctx.pow("5.5", "3.3")
    print('z = ctx.pow("5.5", "3.3"):', z)
    z = ctx.pow(5, 3)
    print('z = ctx.pow(5, 3):', z)

    t = z + 3
    print('t = z + 3:', t)
    print('</H1>')
```

General test code can be found here

```
def arithmetic_operators_with_math53():
    print()
    print('<H1 Title="Arithmetic operators with math53">')

    x = ctx.t(5.0)
    y = ctx.t(2.5)
    print('x: ', x)
    print('y: ', y)

    res = x + y
    print('res = x + y:', res)
    res = y + x
    print('res = y + x:', res)

    res = x - y
    print('res = x - y:', res)
    res = y - x
    print('res = y - x:', res)

    res = x * y
    print('res = x * y:', res)
    res = y * x
    print('res = y * x:', res)

    res = x / y
    print('res = x / y:', res)
    res = y / x
    print('res = y / x:', res)
    print('</H1>')
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03a_MpmReal.py.

1.5.3.2 Examples for `mpm`, complex input

General test code for Python can be found here

```
import math
from xlcalcnet import math53
```

(continues on next page)

(continued from previous page)

```
from decimal import Decimal
from fractions import Fraction
i = 232945639845394856394563936482734638475398457398457 3
```

```
def main_tests():
    general_assignments()
    functions_with_argument_conversion()
    arithmetic_operators_with_math53()
```

General test code can be found here

```
def general_assignments():
    print()
    print('<H1 Title="General assignments and conversions">')

    x = ctx.t(i)
    print('x = ctx.t(i):', x)

    x = ctx.t(5.7)
    print('x = math53T(5.7):', x)

    x = ctx.t(5.7)
    print('x = math53T(5.7):', x)
    x0 = ctx.t(232945639845394856394563936482734 6)
    print('x0 = math53T(232945639845394856394563936482734 6', x0)
    x1 = ctx.t("232945639845394856394563936482734 6")
    print('x1 = ctx.t("232945639845394856394563936482734 6"):', x1)
    x = ctx.t("5.5")
    print('x = math53T("5.5"):', x)

    print()
    x = ctx.t(55)
    print('x = ctx.t(5):', x)
    y = ctx.exp(x)
    print('y = ctx.exp(x):', y)

    z = ctx.exp(5.5)
    print('z = ctx.exp(5.5):', z)
    z = ctx.exp(5)
    print('z = ctx.exp(5):', z)
    z = ctx.exp("5.5")
    print('z = ctx.exp("5.5"):', z)
    print('</H1>')
```

General test code can be found here

```
def functions_with_argument_conversion():
    print()
    print('<H1 Title="Functions with argument conversion">')
    dec = Decimal(1) / Decimal(7)
    print('dec = Decimal(1) / Decimal(7):', dec)
    z = ctx.exp(dec)
    print('z = ctx.exp(dec):', z)
    frac = Fraction("-3/7")
    print('frac = Fraction("-3/7:")', frac)
    z = ctx.exp(frac)
    print('z = ctx.exp(frac):', z)

    print()
    x = ctx.t(5.5)
    print('x = ctx.t(55):', x)
    y = ctx.t(3.3)
    print('y = ctx.t(33):', y)
    z = ctx.pow(x, y)
```

(continues on next page)

(continued from previous page)

```
    print('z = ctx.pow(x, y):        ', z)
    z = ctx.pow(5.5, 3.3)
    print('z = ctx.pow(5.5, 3.3):    ', z)
    z = ctx.pow("5.5", "3.3")
    print('z = ctx.pow("5.5", "3.3"):', z)
    z = ctx.pow(5, 3)
    print('z = ctx.pow(5, 3):', z)

    t = z + 3
    print('t = z + 3:', t)
    print('</H1>')
```

General test code can be found here

```
def arithmetic_operators_with_math53():
    print()
    print('<H1 Title="Arithmetic operators with math53">')

    x = ctx.t(5.0)
    y = ctx.t(2.5)
    print('x: ', x)
    print('y: ', y)

    res = x + y
    print('res = x + y:', res)
    res = y + x
    print('res = y + x:', res)

    res = x - y
    print('res = x - y:', res)
    res = y - x
    print('res = y - x:', res)

    res = x * y
    print('res = x * y:', res)
    res = y * x
    print('res = y * x:', res)

    res = x / y
    print('res = x / y:', res)
    res = y / x
    print('res = y / x:', res)
    print('</H1>')
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03b_MpmCplx.py.

1.5.3.3 Implementation in Python

The Python source code for this module can be found here: ctx_mpm.py.

1.5.4 Interval arithmetic with arbitrary-precision and exponent:ipm

The Python module ipm provides support for real and complex intervals with arbitrary-precision and exponent. The corresponding real and complex data types, float and complex, are implemented in software.

1.5.4.1 Examples for ipm, real input

General test code for Python can be found here

```
import math
from xlcalcnet import math53
from decimal import Decimal
from fractions import Fraction
i = 232945639845394856394563936482734638475398457398457 3
```

```
def main_tests():
    general_assignments()
    functions_with_argument_conversion()
    arithmetic_operators_with_math53()
```

General test code can be found here

```
def general_assignments():
    print()
    print('<H1 Title="General assignments and conversions">')

    x = ctx.t(i)
    print('x = ctx.t(i):', x)

    x = ctx.t(5.7)
    print('x = math53T(5.7):', x)

    x = ctx.t(5.7)
    print('x = math53T(5.7):', x)
    x0 = ctx.t(232945639845394856394563936482734 6)
    print('x0 = math53T(232945639845394856394563936482734 6', x0)
    x1 = ctx.t("232945639845394856394563936482734 6")
    print('x1 = ctx.t("232945639845394856394563936482734 6"):', x1)
    x = ctx.t("5.5")
    print('x = math53T("5.5"):', x)

    print()
    x = ctx.t(55)
    print('x = ctx.t(5):', x)
    y = ctx.exp(x)
    print('y = ctx.exp(x):', y)

    z = ctx.exp(5.5)
    print('z = ctx.exp(5.5):', z)
    z = ctx.exp(5)
    print('z = ctx.exp(5):', z)
    z = ctx.exp("5.5")
    print('z = ctx.exp("5.5"):', z)
    print('</H1>')
```

General test code can be found here

```
def functions_with_argument_conversion():
    print()
    print('<H1 Title="Functions with argument conversion">')
    dec = Decimal(1) / Decimal(7)
    print('dec = Decimal(1) / Decimal(7):', dec)
    z = ctx.exp(dec)
    print('z = ctx.exp(dec):', z)
```

(continues on next page)

(continued from previous page)

```
    frac = Fraction("-3/7")
    print('frac = Fraction("-3/7:")', frac)
    z = ctx.exp(frac)
    print('z = ctx.exp(frac):', z)

    print()
    x = ctx.t(5.5)
    print('x = ctx.t(55):', x)
    y = ctx.t(3.3)
    print('y = ctx.t(33):', y)
    z = ctx.pow(x, y)
    print('z = ctx.pow(x, y):        ', z)
    z = ctx.pow(5.5, 3.3)
    print('z = ctx.pow(5.5, 3.3):    ', z)
    z = ctx.pow("5.5", "3.3")
    print('z = ctx.pow("5.5", "3.3"):', z)
    z = ctx.pow(5, 3)
    print('z = ctx.pow(5, 3):', z)

    t = z + 3
    print('t = z + 3:', t)
    print('</H1>')
```

General test code can be found here

```
def arithmetic_operators_with_math53():
    print()
    print('<H1 Title="Arithmetic operators with math53">')

    x = ctx.t(5.0)
    y = ctx.t(2.5)
    print('x: ', x)
    print('y: ', y)

    res = x + y
    print('res = x + y:', res)
    res = y + x
    print('res = y + x:', res)

    res = x - y
    print('res = x - y:', res)
    res = y - x
    print('res = y - x:', res)

    res = x * y
    print('res = x * y:', res)
    res = y * x
    print('res = y * x:', res)

    res = x / y
    print('res = x / y:', res)
    res = y / x
    print('res = y / x:', res)
    print('</H1>')
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04a_IpmReal.py.

1.5.4.2 Examples for `ipm`, complex input

General test code for Python can be found here

```
import math
from xlcalcnet import math53
```

(continues on next page)

(continued from previous page)

```
from decimal import Decimal
from fractions import Fraction
i = 232945639845394856394563936482734638475398457398457 3

def main_tests():
    general_assignments()
    functions_with_argument_conversion()
    arithmetic_operators_with_math53()
```

General test code can be found here

```
def general_assignments():
    print()
    print('<H1 Title="General assignments and conversions">')

    x = ctx.t(i)
    print('x = ctx.t(i):', x)

    x = ctx.t(5.7)
    print('x = math53T(5.7):', x)

    x = ctx.t(5.7)
    print('x = math53T(5.7):', x)
    x0 = ctx.t(232945639845394856394563936482734 6)
    print('x0 = math53T(232945639845394856394563936482734 6', x0)
    x1 = ctx.t("232945639845394856394563936482734 6")
    print('x1 = ctx.t("232945639845394856394563936482734 6"):', x1)
    x = ctx.t("5.5")
    print('x = math53T("5.5"):', x)

    print()
    x = ctx.t(55)
    print('x = ctx.t(5):', x)
    y = ctx.exp(x)
    print('y = ctx.exp(x):', y)

    z = ctx.exp(5.5)
    print('z = ctx.exp(5.5):', z)
    z = ctx.exp(5)
    print('z = ctx.exp(5):', z)
    z = ctx.exp("5.5")
    print('z = ctx.exp("5.5"):', z)
    print('</H1>')
```

General test code can be found here

```
def functions_with_argument_conversion():
    print()
    print('<H1 Title="Functions with argument conversion">')
    dec = Decimal(1) / Decimal(7)
    print('dec = Decimal(1) / Decimal(7):', dec)
    z = ctx.exp(dec)
    print('z = ctx.exp(dec):', z)
    frac = Fraction("-3/7")
    print('frac = Fraction("-3/7:")', frac)
    z = ctx.exp(frac)
    print('z = ctx.exp(frac):', z)

    print()
    x = ctx.t(5.5)
    print('x = ctx.t(55):', x)
    y = ctx.t(3.3)
    print('y = ctx.t(33):', y)
    z = ctx.pow(x, y)
```

(continues on next page)

(continued from previous page)

```
    print('z = ctx.pow(x, y):        ', z)
    z = ctx.pow(5.5, 3.3)
    print('z = ctx.pow(5.5, 3.3):    ', z)
    z = ctx.pow("5.5", "3.3")
    print('z = ctx.pow("5.5", "3.3"):', z)
    z = ctx.pow(5, 3)
    print('z = ctx.pow(5, 3):', z)

    t = z + 3
    print('t = z + 3:', t)
    print('</H1>')
```

General test code can be found here

```
def arithmetic_operators_with_math53():
    print()
    print('<H1 Title="Arithmetic operators with math53">')

    x = ctx.t(5.0)
    y = ctx.t(2.5)
    print('x: ', x)
    print('y: ', y)

    res = x + y
    print('res = x + y:', res)
    res = y + x
    print('res = y + x:', res)

    res = x - y
    print('res = x - y:', res)
    res = y - x
    print('res = y - x:', res)

    res = x * y
    print('res = x * y:', res)
    res = y * x
    print('res = y * x:', res)

    res = x / y
    print('res = x / y:', res)
    res = y / x
    print('res = y / x:', res)
    print('</H1>')
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04b_IpmCplx.py.

1.5.4.3 Implementation in Python

The Python source code for this module can be found here: ctx_ipm.py.

1.5.5 Decimal floating-point in arbitrary-precision with limited exponent: dpm

The Python module dpm provides support for real and complex decimal floating-point in arbitrary-precision with limited exponent. The corresponding real and complex data types, float and complex, are implemented in software.

Additional contexts are used in xlcalcnet to implement its functions for the mpmath data types, and the Decimal data type, which is part of Python.

Both real numbers (mpf) and complex numbers (mpc) are implemented.

In CPython, the decimal module provides support for fast correctly-rounded decimal floating point arithmetic. See https://docs.python.org/3/library/decimal.html for a decription of the Decimal data type.

The decimal module includes only a few transcendental functions: sqrt, log, exp.

The dec context gives access to many more:

1.5.5.1 Examples for dpm, real input

General test code for Python can be found here

```
import math
from xlcalcnet import math53
from decimal import Decimal
from fractions import Fraction
i = 232945639845394856394563936482734638475398457398457 3


def main_tests():
    general_assignments()
    functions_with_argument_conversion()
    arithmetic_operators_with_math53()
```

General test code can be found here

```
def general_assignments():
    print()
    print('<H1 Title="General assignments and conversions">')

    x = ctx.t(i)
    print('x = ctx.t(i):', x)

    x = ctx.t(5.7)
    print('x = math53T(5.7):', x)

    x = ctx.t(5.7)
    print('x = math53T(5.7):', x)
    x0 = ctx.t(232945639845394856394563936482734 6)
    print('x0 = math53T(232945639845394856394563936482734 6', x0)
    x1 = ctx.t("232945639845394856394563936482734 6")
    print('x1 = ctx.t("232945639845394856394563936482734 6"):', x1)
    x = ctx.t("5.5")
    print('x = math53T("5.5"):', x)

    print()
    x = ctx.t(55)
    print('x = ctx.t(5):', x)
    y = ctx.exp(x)
    print('y = ctx.exp(x):', y)

    z = ctx.exp(5.5)
    print('z = ctx.exp(5.5):', z)
    z = ctx.exp(5)
    print('z = ctx.exp(5):', z)
    z = ctx.exp("5.5")
```

(continues on next page)

(continued from previous page)

```
    print('z = ctx.exp("5.5"):', z)
    print('</H1>')
```

General test code can be found here

```
def functions_with_argument_conversion():
    print()
    print('<H1 Title="Functions with argument conversion">')
    dec = Decimal(1) / Decimal(7)
    print('dec = Decimal(1) / Decimal(7):', dec)
    z = ctx.exp(dec)
    print('z = ctx.exp(dec):', z)
    frac = Fraction("-3/7")
    print('frac = Fraction("-3/7:")', frac)
    z = ctx.exp(frac)
    print('z = ctx.exp(frac):', z)

    print()
    x = ctx.t(5.5)
    print('x = ctx.t(55):', x)
    y = ctx.t(3.3)
    print('y = ctx.t(33):', y)
    z = ctx.pow(x, y)
    print('z = ctx.pow(x, y):         ', z)
    z = ctx.pow(5.5, 3.3)
    print('z = ctx.pow(5.5, 3.3):     ', z)
    z = ctx.pow("5.5", "3.3")
    print('z = ctx.pow("5.5", "3.3"):', z)
    z = ctx.pow(5, 3)
    print('z = ctx.pow(5, 3):', z)

    t = z + 3
    print('t = z + 3:', t)
    print('</H1>')
```

General test code can be found here

```
def arithmetic_operators_with_math53():
    print()
    print('<H1 Title="Arithmetic operators with math53">')

    x = ctx.t(5.0)
    y = ctx.t(2.5)
    print('x: ', x)
    print('y: ', y)

    res = x + y
    print('res = x + y:', res)
    res = y + x
    print('res = y + x:', res)

    res = x - y
    print('res = x - y:', res)
    res = y - x
    print('res = y - x:', res)

    res = x * y
    print('res = x * y:', res)
    res = y * x
    print('res = y * x:', res)

    res = x / y
    print('res = x / y:', res)
    res = y / x
    print('res = y / x:', res)
```

(continues on next page)

(continued from previous page)

```
    print('</H1>')
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04a_IpmReal.py.

1.5.5.2 Examples for `dpm`, complex input

General test code for Python can be found here

```
import math
from xlcalcnet import math53
from decimal import Decimal
from fractions import Fraction
i = 232945639845394856394563936482734638475398457398457 3
```

```
def main_tests():
    general_assignments()
    functions_with_argument_conversion()
    arithmetic_operators_with_math53()
```

General test code can be found here

```
def general_assignments():
    print()
    print('<H1 Title="General assignments and conversions">')

    x = ctx.t(i)
    print('x = ctx.t(i):', x)

    x = ctx.t(5.7)
    print('x = math53T(5.7):', x)

    x = ctx.t(5.7)
    print('x = math53T(5.7):', x)
    x0 = ctx.t(232945639845394856394563936482734 6)
    print('x0 = math53T(232945639845394856394563936482734 6', x0)
    x1 = ctx.t("232945639845394856394563936482734 6")
    print('x1 = ctx.t("232945639845394856394563936482734 6"):', x1)
    x = ctx.t("5.5")
    print('x = math53T("5.5"):', x)

    print()
    x = ctx.t(55)
    print('x = ctx.t(5):', x)
    y = ctx.exp(x)
    print('y = ctx.exp(x):', y)

    z = ctx.exp(5.5)
    print('z = ctx.exp(5.5):', z)
    z = ctx.exp(5)
    print('z = ctx.exp(5):', z)
    z = ctx.exp("5.5")
    print('z = ctx.exp("5.5"):', z)
    print('</H1>')
```

General test code can be found here

```
def functions_with_argument_conversion():
    print()
    print('<H1 Title="Functions with argument conversion">')
    dec = Decimal(1) / Decimal(7)
    print('dec = Decimal(1) / Decimal(7):', dec)
```

(continues on next page)

(continued from previous page)

```
    z = ctx.exp(dec)
    print('z = ctx.exp(dec):', z)
    frac = Fraction("-3/7")
    print('frac = Fraction("-3/7:")', frac)
    z = ctx.exp(frac)
    print('z = ctx.exp(frac):', z)

    print()
    x = ctx.t(5.5)
    print('x = ctx.t(55):', x)
    y = ctx.t(3.3)
    print('y = ctx.t(33):', y)
    z = ctx.pow(x, y)
    print('z = ctx.pow(x, y):         ', z)
    z = ctx.pow(5.5, 3.3)
    print('z = ctx.pow(5.5, 3.3):     ', z)
    z = ctx.pow("5.5", "3.3")
    print('z = ctx.pow("5.5", "3.3"):', z)
    z = ctx.pow(5, 3)
    print('z = ctx.pow(5, 3):', z)

    t = z + 3
    print('t = z + 3:', t)
    print('</H1>')
```

General test code can be found here

```
def arithmetic_operators_with_math53():
    print()
    print('<H1 Title="Arithmetic operators with math53">')

    x = ctx.t(5.0)
    y = ctx.t(2.5)
    print('x: ', x)
    print('y: ', y)

    res = x + y
    print('res = x + y:', res)
    res = y + x
    print('res = y + x:', res)

    res = x - y
    print('res = x - y:', res)
    res = y - x
    print('res = y - x:', res)

    res = x * y
    print('res = x * y:', res)
    res = y * x
    print('res = y * x:', res)

    res = x / y
    print('res = x / y:', res)
    res = y / x
    print('res = y / x:', res)
    print('</H1>')
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05b_DpmCplx.py.

1.5.5.3 Implementation in Python

The Python source code for this module can be found here: ctx_dpm.py.

1.5.6 Rational numbers: qpm

The qpm data type is mostly useful in the context of linear algebra, where it can provide exact results.

Only real numbers (mpf) are implemented.

The internal representation dependes on what else is installed on the system:

If apm is available, the fmpq data type is used; otherwise, if gpm is available, the mpq data type is used; otherwise, Python's built in Fraction data type is used.

In CPython, the fractions module provides support for rational number arithmetic. See https://docs.python.org/3/library/fractions.html for a decription of the Fraction data type.

1.5.6.1 Examples for qpm, real input

General test code for Python can be found here

```
import math
from xlcalcnet import math53
from decimal import Decimal
from fractions import Fraction
i = 232945639845394856394563936482734638475398457398457 3
```

```
def main_tests():
    general_assignments()
    functions_with_argument_conversion()
    arithmetic_operators_with_math53()
```

General test code can be found here

```
def general_assignments():
    print()
    print('<H1 Title="General assignments and conversions">')

    x = ctx.t(i)
    print('x = ctx.t(i):', x)

    x = ctx.t(5.7)
    print('x = math53T(5.7):', x)

    x = ctx.t(5.7)
    print('x = math53T(5.7):', x)
    x0 = ctx.t(232945639845394856394563936482734 6)
    print('x0 = math53T(232945639845394856394563936482734 6', x0)
    x1 = ctx.t("232945639845394856394563936482734 6")
    print('x1 = ctx.t("232945639845394856394563936482734 6"):', x1)
    x = ctx.t("5.5")
    print('x = math53T("5.5"):', x)

    print()
    x = ctx.t(55)
    print('x = ctx.t(5):', x)
    y = ctx.exp(x)
    print('y = ctx.exp(x):', y)

    z = ctx.exp(5.5)
    print('z = ctx.exp(5.5):', z)
    z = ctx.exp(5)
    print('z = ctx.exp(5):', z)
    z = ctx.exp("5.5")
    print('z = ctx.exp("5.5"):', z)
    print('</H1>')
```

General test code can be found here

```
def functions_with_argument_conversion():
    print()
    print('<H1 Title="Functions with argument conversion">')
    dec = Decimal(1) / Decimal(7)
    print('dec = Decimal(1) / Decimal(7):', dec)
    z = ctx.exp(dec)
    print('z = ctx.exp(dec):', z)
    frac = Fraction("-3/7")
    print('frac = Fraction("-3/7:")', frac)
    z = ctx.exp(frac)
    print('z = ctx.exp(frac):', z)

    print()
    x = ctx.t(5.5)
    print('x = ctx.t(55):', x)
    y = ctx.t(3.3)
    print('y = ctx.t(33):', y)
    z = ctx.pow(x, y)
    print('z = ctx.pow(x, y):        ', z)
    z = ctx.pow(5.5, 3.3)
    print('z = ctx.pow(5.5, 3.3):    ', z)
    z = ctx.pow("5.5", "3.3")
    print('z = ctx.pow("5.5", "3.3"):', z)
    z = ctx.pow(5, 3)
    print('z = ctx.pow(5, 3):', z)

    t = z + 3
    print('t = z + 3:', t)
    print('</H1>')
```

General test code can be found here

```
def arithmetic_operators_with_math53():
    print()
    print('<H1 Title="Arithmetic operators with math53">')

    x = ctx.t(5.0)
    y = ctx.t(2.5)
    print('x: ', x)
    print('y: ', y)

    res = x + y
    print('res = x + y:', res)
    res = y + x
    print('res = y + x:', res)

    res = x - y
    print('res = x - y:', res)
    res = y - x
    print('res = y - x:', res)

    res = x * y
    print('res = x * y:', res)
    res = y * x
    print('res = y * x:', res)

    res = x / y
    print('res = x / y:', res)
    res = y / x
    print('res = y / x:', res)
    print('</H1>')
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06a_QpmReal.py.

1.5.6.2 Implementation in Python

The Python source code for this module can be found here: ctx_dpm.py.

1.5.7 Binary floating-point in arbitrary-precision with limited exponent: gpm

The Python module `gpm` provides support for real and complex Binary floating-point in arbitrary-precision with limited exponent. The corresponding real and complex data types, `float` and `complex`, are implemented in software.

gmpy2 is a C-coded Python extension module that supports multiple-precision arithmetic.

https://gmpy2.readthedocs.io/en/latest/

Assuming that the Python batch files have been installed as described *here*, gmpy2 can be installed by double-clicking on the batch file `A11installgmpy2.bat` in the `C:\Python313` folder.

1.5.7.1 Examples for gpm, real input

General test code for Python can be found here

```
import math
from xlcalcnet import math53
from decimal import Decimal
from fractions import Fraction
i = 232945639845394856394563936482734638475398457398457 3
```

```
def main_tests():
    general_assignments()
    functions_with_argument_conversion()
    arithmetic_operators_with_math53()
```

General test code can be found here

```
def general_assignments():
    print()
    print('<H1 Title="General assignments and conversions">')

    x = ctx.t(i)
    print('x = ctx.t(i):', x)

    x = ctx.t(5.7)
    print('x = math53T(5.7):', x)

    x = ctx.t(5.7)
    print('x = math53T(5.7):', x)
    x0 = ctx.t(232945639845394856394563936482734 6)
    print('x0 = math53T(232945639845394856394563936482734 6', x0)
    x1 = ctx.t("232945639845394856394563936482734 6")
    print('x1 = ctx.t("232945639845394856394563936482734 6"):', x1)
    x = ctx.t("5.5")
    print('x = math53T("5.5"):', x)

    print()
    x = ctx.t(55)
    print('x = ctx.t(5):', x)
    y = ctx.exp(x)
    print('y = ctx.exp(x):', y)

    z = ctx.exp(5.5)
    print('z = ctx.exp(5.5):', z)
    z = ctx.exp(5)
    print('z = ctx.exp(5):', z)
    z = ctx.exp("5.5")
```

(continues on next page)

(continued from previous page)

```
    print('z = ctx.exp("5.5"):', z)
    print('</H1>')
```

General test code can be found here

```
def functions_with_argument_conversion():
    print()
    print('<H1 Title="Functions with argument conversion">')
    dec = Decimal(1) / Decimal(7)
    print('dec = Decimal(1) / Decimal(7):', dec)
    z = ctx.exp(dec)
    print('z = ctx.exp(dec):', z)
    frac = Fraction("-3/7")
    print('frac = Fraction("-3/7:")', frac)
    z = ctx.exp(frac)
    print('z = ctx.exp(frac):', z)

    print()
    x = ctx.t(5.5)
    print('x = ctx.t(55):', x)
    y = ctx.t(3.3)
    print('y = ctx.t(33):', y)
    z = ctx.pow(x, y)
    print('z = ctx.pow(x, y):         ', z)
    z = ctx.pow(5.5, 3.3)
    print('z = ctx.pow(5.5, 3.3):     ', z)
    z = ctx.pow("5.5", "3.3")
    print('z = ctx.pow("5.5", "3.3"):', z)
    z = ctx.pow(5, 3)
    print('z = ctx.pow(5, 3):', z)

    t = z + 3
    print('t = z + 3:', t)
    print('</H1>')
```

General test code can be found here

```
def arithmetic_operators_with_math53():
    print()
    print('<H1 Title="Arithmetic operators with math53">')

    x = ctx.t(5.0)
    y = ctx.t(2.5)
    print('x: ', x)
    print('y: ', y)

    res = x + y
    print('res = x + y:', res)
    res = y + x
    print('res = y + x:', res)

    res = x - y
    print('res = x - y:', res)
    res = y - x
    print('res = y - x:', res)

    res = x * y
    print('res = x * y:', res)
    res = y * x
    print('res = y * x:', res)

    res = x / y
    print('res = x / y:', res)
    res = y / x
    print('res = y / x:', res)
```

(continues on next page)

(continued from previous page)

```
    print('</H1>')
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07a_GpmReal.py.

1.5.7.2 Examples for `gpm`, complex input

General test code for Python can be found here

```
import math
from xlcalcnet import math53
from decimal import Decimal
from fractions import Fraction
i = 232945639845394856394563936482734638475398457398457 3
```

```
def main_tests():
    general_assignments()
    functions_with_argument_conversion()
    arithmetic_operators_with_math53()
```

General test code can be found here

```
def general_assignments():
    print()
    print('<H1 Title="General assignments and conversions">')

    x = ctx.t(i)
    print('x = ctx.t(i):', x)

    x = ctx.t(5.7)
    print('x = math53T(5.7):', x)

    x = ctx.t(5.7)
    print('x = math53T(5.7):', x)
    x0 = ctx.t(23294563984539485639456393648273463)
    print('x0 = math53T(23294563984539485639456393648273463', x0)
    x1 = ctx.t("23294563984539485639456393648273463")
    print('x1 = ctx.t("23294563984539485639456393648273463"):', x1)
    x = ctx.t("5.5")
    print('x = math53T("5.5"):', x)

    print()
    x = ctx.t(55)
    print('x = ctx.t(5):', x)
    y = ctx.exp(x)
    print('y = ctx.exp(x):', y)

    z = ctx.exp(5.5)
    print('z = ctx.exp(5.5):', z)
    z = ctx.exp(5)
    print('z = ctx.exp(5):', z)
    z = ctx.exp("5.5")
    print('z = ctx.exp("5.5"):', z)
    print('</H1>')
```

General test code can be found here

```
def functions_with_argument_conversion():
    print()
    print('<H1 Title="Functions with argument conversion">')
    dec = Decimal(1) / Decimal(7)
    print('dec = Decimal(1) / Decimal(7):', dec)
```

(continues on next page)

(continued from previous page)

```
    z = ctx.exp(dec)
    print('z = ctx.exp(dec):', z)
    frac = Fraction("-3/7")
    print('frac = Fraction("-3/7:")', frac)
    z = ctx.exp(frac)
    print('z = ctx.exp(frac):', z)

    print()
    x = ctx.t(5.5)
    print('x = ctx.t(55):', x)
    y = ctx.t(3.3)
    print('y = ctx.t(33):', y)
    z = ctx.pow(x, y)
    print('z = ctx.pow(x, y):         ', z)
    z = ctx.pow(5.5, 3.3)
    print('z = ctx.pow(5.5, 3.3):     ', z)
    z = ctx.pow("5.5", "3.3")
    print('z = ctx.pow("5.5", "3.3"):', z)
    z = ctx.pow(5, 3)
    print('z = ctx.pow(5, 3):', z)

    t = z + 3
    print('t = z + 3:', t)
    print('</H1>')
```

General test code can be found here

```
def arithmetic_operators_with_math53():
    print()
    print('<H1 Title="Arithmetic operators with math53">')

    x = ctx.t(5.0)
    y = ctx.t(2.5)
    print('x: ', x)
    print('y: ', y)

    res = x + y
    print('res = x + y:', res)
    res = y + x
    print('res = y + x:', res)

    res = x - y
    print('res = x - y:', res)
    res = y - x
    print('res = y - x:', res)

    res = x * y
    print('res = x * y:', res)
    res = y * x
    print('res = y * x:', res)

    res = x / y
    print('res = x / y:', res)
    res = y / x
    print('res = y / x:', res)
    print('</H1>')
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07b_GpmCplx.py.

1.5.7.3 Implementation in Python

The Python source code for this module can be found here: ctx_gpm.py.

1.5.8 Binary balls in arbitrary-precision and with arbitrary exponent: apm

The Python module apm provides support for real and complex binary balls in arbitrary-precision and with arbitrary exponent. The corresponding real and complex data types, float and complex, are implemented in software.

pythonflint is a C-coded Python extension module that supports multiple-precision arithmetic.

https://python-flint.readthedocs.io/en/latest/

Assuming that the Python batch files have been installed as described *here*, Python-flint can be installed by double-clicking on the batch file A12installpythonflint.bat in the C:\Python313 folder.

1.5.8.1 Examples for apm, real input

General test code for Python can be found here

```
import math
from xlcalcnet import math53
from decimal import Decimal
from fractions import Fraction
i = 232945639845394856394563936482734638475398457398457 3
```

```
def main_tests():
    general_assignments()
    functions_with_argument_conversion()
    arithmetic_operators_with_math53()
```

General test code can be found here

```
def general_assignments():
    print()
    print('<H1 Title="General assignments and conversions">')

    x = ctx.t(i)
    print('x = ctx.t(i):', x)

    x = ctx.t(5.7)
    print('x = math53T(5.7):', x)

    x = ctx.t(5.7)
    print('x = math53T(5.7):', x)
    x0 = ctx.t(232945639845394856394563936482734 6)
    print('x0 = math53T(232945639845394856394563936482734 6', x0)
    x1 = ctx.t("232945639845394856394563936482734 6")
    print('x1 = ctx.t("232945639845394856394563936482734 6"):', x1)
    x = ctx.t("5.5")
    print('x = math53T("5.5"):', x)

    print()
    x = ctx.t(55)
    print('x = ctx.t(5):', x)
    y = ctx.exp(x)
    print('y = ctx.exp(x):', y)

    z = ctx.exp(5.5)
    print('z = ctx.exp(5.5):', z)
    z = ctx.exp(5)
    print('z = ctx.exp(5):', z)
    z = ctx.exp("5.5")
    print('z = ctx.exp("5.5"):', z)
    print('</H1>')
```

General test code can be found here

```
def functions_with_argument_conversion():
    print()
    print('<H1 Title="Functions with argument conversion">')
    dec = Decimal(1) / Decimal(7)
    print('dec = Decimal(1) / Decimal(7):', dec)
    z = ctx.exp(dec)
    print('z = ctx.exp(dec):', z)
    frac = Fraction("-3/7")
    print('frac = Fraction("-3/7:")', frac)
    z = ctx.exp(frac)
    print('z = ctx.exp(frac):', z)

    print()
    x = ctx.t(5.5)
    print('x = ctx.t(55):', x)
    y = ctx.t(3.3)
    print('y = ctx.t(33):', y)
    z = ctx.pow(x, y)
    print('z = ctx.pow(x, y):        ', z)
    z = ctx.pow(5.5, 3.3)
    print('z = ctx.pow(5.5, 3.3):    ', z)
    z = ctx.pow("5.5", "3.3")
    print('z = ctx.pow("5.5", "3.3"):', z)
    z = ctx.pow(5, 3)
    print('z = ctx.pow(5, 3):', z)

    t = z + 3
    print('t = z + 3:', t)
    print('</H1>')
```

General test code can be found here

```
def arithmetic_operators_with_math53():
    print()
    print('<H1 Title="Arithmetic operators with math53">')

    x = ctx.t(5.0)
    y = ctx.t(2.5)
    print('x: ', x)
    print('y: ', y)

    res = x + y
    print('res = x + y:', res)
    res = y + x
    print('res = y + x:', res)

    res = x - y
    print('res = x - y:', res)
    res = y - x
    print('res = y - x:', res)

    res = x * y
    print('res = x * y:', res)
    res = y * x
    print('res = y * x:', res)

    res = x / y
    print('res = x / y:', res)
    res = y / x
    print('res = y / x:', res)
    print('</H1>')
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D08a_ApmReal.py.

1.5.8.2 Examples for apm, complex input

General test code for Python can be found here

```
import math
from xlcalcnet import math53
from decimal import Decimal
from fractions import Fraction
i = 232945639845394856394563936482734638475398457398457 3984573


def main_tests():
    general_assignments()
    functions_with_argument_conversion()
    arithmetic_operators_with_math53()
```

General test code can be found here

```
def general_assignments():
    print()
    print('<H1 Title="General assignments and conversions">')

    x = ctx.t(i)
    print('x = ctx.t(i):', x)

    x = ctx.t(5.7)
    print('x = math53T(5.7):', x)

    x = ctx.t(5.7)
    print('x = math53T(5.7):', x)
    x0 = ctx.t(232945639845394856394563936482734 6)
    print('x0 = math53T(232945639845394856394563936482734 6', x0)
    x1 = ctx.t("232945639845394856394563936482734 6")
    print('x1 = ctx.t("232945639845394856394563936482734 6"):', x1)
    x = ctx.t("5.5")
    print('x = math53T("5.5"):', x)

    print()
    x = ctx.t(55)
    print('x = ctx.t(5):', x)
    y = ctx.exp(x)
    print('y = ctx.exp(x):', y)

    z = ctx.exp(5.5)
    print('z = ctx.exp(5.5):', z)
    z = ctx.exp(5)
    print('z = ctx.exp(5):', z)
    z = ctx.exp("5.5")
    print('z = ctx.exp("5.5"):', z)
    print('</H1>')
```

General test code can be found here

```
def functions_with_argument_conversion():
    print()
    print('<H1 Title="Functions with argument conversion">')
    dec = Decimal(1) / Decimal(7)
    print('dec = Decimal(1) / Decimal(7):', dec)
    z = ctx.exp(dec)
    print('z = ctx.exp(dec):', z)
    frac = Fraction("-3/7")
    print('frac = Fraction("-3/7:")', frac)
    z = ctx.exp(frac)
    print('z = ctx.exp(frac):', z)

    print()
```

(continues on next page)

(continued from previous page)

```
    x = ctx.t(5.5)
    print('x = ctx.t(55):', x)
    y = ctx.t(3.3)
    print('y = ctx.t(33):', y)
    z = ctx.pow(x, y)
    print('z = ctx.pow(x, y):        ', z)
    z = ctx.pow(5.5, 3.3)
    print('z = ctx.pow(5.5, 3.3):    ', z)
    z = ctx.pow("5.5", "3.3")
    print('z = ctx.pow("5.5", "3.3"):', z)
    z = ctx.pow(5, 3)
    print('z = ctx.pow(5, 3):', z)

    t = z + 3
    print('t = z + 3:', t)
    print('</H1>')
```

General test code can be found here

```
def arithmetic_operators_with_math53():
    print()
    print('<H1 Title="Arithmetic operators with math53">')

    x = ctx.t(5.0)
    y = ctx.t(2.5)
    print('x: ', x)
    print('y: ', y)

    res = x + y
    print('res = x + y:', res)
    res = y + x
    print('res = y + x:', res)

    res = x - y
    print('res = x - y:', res)
    res = y - x
    print('res = y - x:', res)

    res = x * y
    print('res = x * y:', res)
    res = y * x
    print('res = y * x:', res)

    res = x / y
    print('res = x / y:', res)
    res = y / x
    print('res = y / x:', res)
    print('</H1>')
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D08b_ApmCplx.py.

1.5.8.3 Implementation in Python

The Python source code for this module can be found here: ctx_apm.py.

1.5.9 Numpy support for multiprecision data types: `npm`

1.5.9.1 Overview

Numpy supports general objects as elements, and this can be used to use numpy functions for the above data types.

1.6 Mathematical functions in fixed precision (C#, can be called from Python)

1.6.1 C# based context groups

Various additional numerical contexts support C# and Python. It is convenient to divide them into groups to make referencing them per function description more efficient.

The following groups of contexts are available:

1.6.1.1 Context group `ctx53`

This context group includes `math53` and `cmath53` (see *math53/cmath53*). Almost all functions are from the DAMath library, with a few functions from Boost Math, Scipy, Julia and other libraries available on Github.

1.6.1.2 Context group `ctxcpp`

This context group includes contexts which contain functions of the C++ standard library, the Eigen library, and functions which can easily be derived from them. They include contexts in fixed precision: `sreal` and `scplx` (see *sreal/scplx*), `dreal` and `dcplx` (see *dreal/dcplx*), `ereal` and `ecplx` (see *ereal/ecplx*), `qreal` and `qcplx` (see *qreal/cplx*), `oreal` and `ocplx` (see *oreal/ocplx*), ; and contexts in arbitrary precision, which are part of XlCalcNet2 (which hence needs to be installed): `mreal` and `mcplx` (see *mreal/mcplx*).

1.6.1.3 Context group `ctxboost`

This context group includes contexts which contain functions of the the Boost Math/Multiprecision/Odeint libraries, and functions which can easily be derived from them. They include contexts in fixed precision: `sreal` (see *sreal*), `dreal` (see *dreal*), `ereal` (see *ereal*), `qreal` (see *qreal*), `oreal` (see *oreal*), ; and one context in arbitrary precision, which is part of XlCalcNet2 (which hence needs to be installed): `mreal` (see *mreal*).

1.6.1.4 Context group `ctxflint`

This context group includes contexts which contain functions of the Flint 3.4 library, the Eigen library, and functions which can easily be derived from them. These are contexts in fixed and in arbitrary precision, which are part of XlCalcNet2 (which hence needs to be installed). They include `sflint` and `sflintc` (see *sflint/sflintc*), `dflint` and `dflintc` (see *dflint/dflintc*), `eflint` and `eflintc` (see *eflint/eflintc*), `qflint` and `qflintc` (see *qflint/qflint*), `oflint` and `oflintc` (see *oflint/oflintc*), `mflint` and `mflintc` (see *mflint/mflintc*), `aflint` and `aflintc` (see *aflint/aflint*).

1.6.2 Scalar functions with Double and Complex: math53 and cmath53

The C# modules math53 and cmath53 provide support for real and complex floating point numbers in double precision (see https://en.wikipedia.org/wiki/Double-precision_floating-point_format). The corresponding real and complex data types, Double and Complex, are implemented in hardware and are part of .Net Framework (and are therefore quite fast).

Note: automatic conversion from Double in .Net Framework to float

Note: no conversion from Complex in .Net Framework to complex in Python. Explain workarounds.

DAMath library.

1.6.2.1 Examples in C#, math53

General test code for C# can be found here

```
#region Usings
using System;
using System.Numerics;
using FixedPrecNet;
#endregion


public static void MainTests()
{
    Console.WriteLine("Demo of some math53 functions");
    SrealTest0();
    SrealTest1();
}
```

General test code for C# can be found here

```
public static void Math53Test0()
{
    Console.WriteLine("<H1 Title=" + "\"" + "ScplxTest0"  + "\"" + ">");

    var a = cmath53.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = cmath53.abs(a);
    Console.WriteLine("res1 = cmath53.abs(a): {0}", res1);

    var res2 = cmath53.exp(a);
    Console.WriteLine("res2 = cmath53.exp(a): {0}", res2);

    Console.WriteLine("</H1>");
}
```

General test code for C# can be found here

```
public static void Math53Test1()
{
    Console.WriteLine("<H1 Title=" + "\"" + "ScplxTest1"  + "\"" + ">");

    var a = cmath53.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = cmath53.asin(a);
    Console.WriteLine("res1 = cmath53.asin(a) {0}", res1);

    var res2 = cmath53.sin(a);
    Console.WriteLine("res2 = cmath53.sin(a) {0}", res2);

    Console.WriteLine("</H1>");
}
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02a_math53.cs.

1.6.2.2 Examples in C#, `cmath53`

General test code for C# can be found here

```
#region Usings
using System;
using System.Numerics;
using FixedPrecNet;
#endregion


public static void MainTests()
{
    Console.WriteLine("Demo of some math53 functions");
    SrealTest0();
    SrealTest1();
}
```

General test code for C# can be found here

```
public static void ScplxTest0()
{
    Console.WriteLine("<H1 Title=" + "\"" + "ScplxTest0"  + "\"" + ">");

    var a = cmath53.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = cmath53.abs(a);
    Console.WriteLine("res1 = cmath53.abs(a): {0}", res1);

    var res2 = cmath53.exp(a);
    Console.WriteLine("res2 = cmath53.exp(a): {0}", res2);

    Console.WriteLine("</H1>");
}
```

General test code for C# can be found here

```
public static void ScplxTest1()
{
    Console.WriteLine("<H1 Title=" + "\"" + "ScplxTest1"  + "\"" + ">");

    var a = cmath53.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = cmath53.asin(a);
    Console.WriteLine("res1 = cmath53.asin(a) {0}", res1);

    var res2 = cmath53.sin(a);
    Console.WriteLine("res2 = cmath53.sin(a) {0}", res2);

    Console.WriteLine("</H1>");
}
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02b_Cmath53.cs.

1.6.2.3 Examples in Python, `math53`

General test code for Python can be found here

```
import math
from xlcalcnet import math53
from decimal import Decimal
from fractions import Fraction
i = 232945639845394856394563936482734638475398457398457 3984573


def main_tests():
    general_assignments()
    functions_with_argument_conversion()
    arithmetic_operators_with_math53()
```

General test code can be found here

```
def general_assignments():
    print()
    print('<H1 Title="General assignments and conversions">')

    x = ctx.t(i)
    print('x = ctx.t(i):', x)

    x = ctx.t(5.7)
    print('x = math53T(5.7):', x)

    x = ctx.t(5.7)
    print('x = math53T(5.7):', x)
    x0 = ctx.t(232945639845394856394563936482734638475398457398457 3984573)
    print('x0 = math53T(232945639845394856394563936482734638475398457398457 3984573', x0)
    x1 = ctx.t("232945639845394856394563936482734638475398457398457 3984573")
    print('x1 = ctx.t("232945639845394856394563936482734638475398457398457 3984573"):', x1)
    x = ctx.t("5.5")
    print('x = math53T("5.5"):', x)

    print()
    x = ctx.t(55)
    print('x = ctx.t(5):', x)
    y = ctx.exp(x)
    print('y = ctx.exp(x):', y)

    z = ctx.exp(5.5)
    print('z = ctx.exp(5.5):', z)
    z = ctx.exp(5)
    print('z = ctx.exp(5):', z)
    z = ctx.exp("5.5")
    print('z = ctx.exp("5.5"):', z)
    print('</H1>')
```

General test code can be found here

```
def functions_with_argument_conversion():
    print()
    print('<H1 Title="Functions with argument conversion">')
    dec = Decimal(1) / Decimal(7)
    print('dec = Decimal(1) / Decimal(7):', dec)
    z = ctx.exp(dec)
    print('z = ctx.exp(dec):', z)
    frac = Fraction("-3/7")
    print('frac = Fraction("-3/7:")', frac)
    z = ctx.exp(frac)
    print('z = ctx.exp(frac):', z)

    print()
```

(continues on next page)

(continued from previous page)

```
    x = ctx.t(5.5)
    print('x = ctx.t(55):', x)
    y = ctx.t(3.3)
    print('y = ctx.t(33):', y)
    z = ctx.pow(x, y)
    print('z = ctx.pow(x, y):        ', z)
    z = ctx.pow(5.5, 3.3)
    print('z = ctx.pow(5.5, 3.3):    ', z)
    z = ctx.pow("5.5", "3.3")
    print('z = ctx.pow("5.5", "3.3"):', z)
    z = ctx.pow(5, 3)
    print('z = ctx.pow(5, 3):', z)

    t = z + 3
    print('t = z + 3:', t)
    print('</H1>')
```

General test code can be found here

```
def arithmetic_operators_with_math53():
    print()
    print('<H1 Title="Arithmetic operators with math53">')

    x = ctx.t(5.0)
    y = ctx.t(2.5)
    print('x: ', x)
    print('y: ', y)

    res = x + y
    print('res = x + y:', res)
    res = y + x
    print('res = y + x:', res)

    res = x - y
    print('res = x - y:', res)
    res = y - x
    print('res = y - x:', res)

    res = x * y
    print('res = x * y:', res)
    res = y * x
    print('res = y * x:', res)

    res = x / y
    print('res = x / y:', res)
    res = y / x
    print('res = y / x:', res)
    print('</H1>')
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02a_math53.py.

1.6.2.4 Examples in Python, `cmath53`

General test code for Python can be found here

```
import math
from xlcalcnet import math53
from decimal import Decimal
from fractions import Fraction
i = 232945639845394856394563936482734638475398457398457 3


def main_tests():
```

(continues on next page)

(continued from previous page)

```
    general_assignments()
    functions_with_argument_conversion()
    arithmetic_operators_with_math53()
```

General test code can be found here

```
def general_assignments():
    print()
    print('<H1 Title="General assignments and conversions">')

    x = ctx.t(i)
    print('x = ctx.t(i):', x)

    x = ctx.t(5.7)
    print('x = math53T(5.7):', x)

    x = ctx.t(5.7)
    print('x = math53T(5.7):', x)
    x0 = ctx.t(232945639845394856394563936482734 6)
    print('x0 = math53T(232945639845394856394563936482734 6', x0)
    x1 = ctx.t("232945639845394856394563936482734 6")
    print('x1 = ctx.t("232945639845394856394563936482734 6"):', x1)
    x = ctx.t("5.5")
    print('x = math53T("5.5"):', x)

    print()
    x = ctx.t(55)
    print('x = ctx.t(5):', x)
    y = ctx.exp(x)
    print('y = ctx.exp(x):', y)

    z = ctx.exp(5.5)
    print('z = ctx.exp(5.5):', z)
    z = ctx.exp(5)
    print('z = ctx.exp(5):', z)
    z = ctx.exp("5.5")
    print('z = ctx.exp("5.5"):', z)
    print('</H1>')
```

General test code can be found here

```
def functions_with_argument_conversion():
    print()
    print('<H1 Title="Functions with argument conversion">')
    dec = Decimal(1) / Decimal(7)
    print('dec = Decimal(1) / Decimal(7):', dec)
    z = ctx.exp(dec)
    print('z = ctx.exp(dec):', z)
    frac = Fraction("-3/7")
    print('frac = Fraction("-3/7:")', frac)
    z = ctx.exp(frac)
    print('z = ctx.exp(frac):', z)

    print()
    x = ctx.t(5.5)
    print('x = ctx.t(55):', x)
    y = ctx.t(3.3)
    print('y = ctx.t(33):', y)
    z = ctx.pow(x, y)
    print('z = ctx.pow(x, y):        ', z)
    z = ctx.pow(5.5, 3.3)
    print('z = ctx.pow(5.5, 3.3):    ', z)
    z = ctx.pow("5.5", "3.3")
    print('z = ctx.pow("5.5", "3.3"):', z)
    z = ctx.pow(5, 3)
```

(continues on next page)

(continued from previous page)

```
    print('z = ctx.pow(5, 3):', z)

    t = z + 3
    print('t = z + 3:', t)
    print('</H1>')
```

General test code can be found here

```
def arithmetic_operators_with_math53():
    print()
    print('<H1 Title="Arithmetic operators with math53">')

    x = ctx.t(5.0)
    y = ctx.t(2.5)
    print('x: ', x)
    print('y: ', y)

    res = x + y
    print('res = x + y:', res)
    res = y + x
    print('res = y + x:', res)

    res = x - y
    print('res = x - y:', res)
    res = y - x
    print('res = y - x:', res)

    res = x * y
    print('res = x * y:', res)
    res = y * x
    print('res = y * x:', res)

    res = x / y
    print('res = x / y:', res)
    res = y / x
    print('res = y / x:', res)
    print('</H1>')
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02b_Cmath53.py.

1.6.2.5 Notes regarding the implementation in C# and C++

The C# source code for the module `math53` can be found here: ctx.cs.

The C# source code for the module `cmath53` can be found here: cmath53.cs.

The Pascal source code which is called from `ctx.cs` and `cmath53.cs` can be found here: libwe64d.pas.

The C++ source code which is called from `ctx.cs` and `cmath53.cs` can be found here: XSF.cpp.

The C# source code (transcribed from the Julia project) which is called from `ctx.cs` and `cmath53.cs` can be found here: fromjulia.cs.

1.6.3 Binary floating point, single precision: `sreal` and `scplx`

The C# modules `sreal` and `scplx` provide support for real and complex floating point numbers in single precision (see https://en.wikipedia.org/wiki/Single-precision_floating-point_format). The corresponding real data type, `Single`, is implemented in hardware and is part of .Net Framework (and is therefore quite fast), the corresponding complex data type, `SingleC`, is also implemented in hardware, but has been added as an object in XlCalcNet (and has therefore the overhead of objects).

The C# modules `sreal` and `scplx` fully support Boost.Math and Eigen.

TODO: python code showing larget, lowest, machine epsilon etc.

1.6.3.1 Examples in C#, `sreal`

General test code for C# can be found here

```
#region Usings
using System;
using System.Numerics;
using FixedPrecNet;
#endregion


public static void MainTests()
{
    Console.WriteLine("Demo of some sreal functions");
    SrealTest0();
    SrealTest1();
}
```

General test code for C# can be found here

```
public static void ScplxTest0()
{
    Console.WriteLine("<H1 Title=" + "\"" + "ScplxTest0"  + "\"" + ">");

    var a = scplx.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = scplx.abs(a);
    Console.WriteLine("res1 = scplx.abs(a): {0}", res1);

    var res2 = scplx.exp(a);
    Console.WriteLine("res2 = scplx.exp(a): {0}", res2);

    Console.WriteLine("</H1>");
}
```

General test code for C# can be found here

```
public static void ScplxTest1()
{
    Console.WriteLine("<H1 Title=" + "\"" + "ScplxTest1"  + "\"" + ">");

    var a = scplx.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = scplx.asin(a);
    Console.WriteLine("res1 = scplx.asin(a) {0}", res1);

    var res2 = scplx.sin(a);
    Console.WriteLine("res2 = scplx.sin(a) {0}", res2);

    Console.WriteLine("</H1>");
}
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02a_Sreal.cs.

1.6.3.2 Examples in C#, `scplx`

General test code for C# can be found here

```
#region Usings
using System;
using System.Numerics;
using FixedPrecNet;
#endregion


public static void MainTests()
{
    Console.WriteLine("Demo of some sreal functions");
    SrealTest0();
    SrealTest1();
}
```

General test code for C# can be found here

```
public static void ScplxTest0()
{
    Console.WriteLine("<H1 Title=" + "\"" + "ScplxTest0"  + "\"" + ">");

    var a = scplx.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = scplx.abs(a);
    Console.WriteLine("res1 = scplx.abs(a): {0}", res1);

    var res2 = scplx.exp(a);
    Console.WriteLine("res2 = scplx.exp(a): {0}", res2);

    Console.WriteLine("</H1>");
}
```

General test code for C# can be found here

```
public static void ScplxTest1()
{
    Console.WriteLine("<H1 Title=" + "\"" + "ScplxTest1"  + "\"" + ">");

    var a = scplx.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = scplx.asin(a);
    Console.WriteLine("res1 = scplx.asin(a) {0}", res1);

    var res2 = scplx.sin(a);
    Console.WriteLine("res2 = scplx.sin(a) {0}", res2);

    Console.WriteLine("</H1>");
}
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03b_Scplx.cs.

1.6.3.3 Examples in Python, sreal

General test code for Python can be found here

```
import math
from xlcalcnet import sreal
from decimal import Decimal
from fractions import Fraction
i = 232945639845394856394563936482734638475398457398457 3

def main_tests():
    general_assignments()
    functions_with_argument_conversion()
    arithmetic_operators_with_sreal()
```

General test code can be found here

```
def general_assignments():
    print()
    print('<H1 Title="General assignments and conversions">')

    x = sreal.t(i)
    print('x = sreal.t(i):', x)

    x = sreal.t(5.7)
    print('x = srealT(5.7):', x)

    x = sreal.t(5.7)
    print('x = srealT(5.7):', x)
    x0 = sreal.t(232945639845394856394563936482734)
    print('x0 = srealT(232945639845394856394563936482734', x0)
    x1 = sreal.t("232945639845394856394563936482734")
    print('x1 = sreal.t("232945639845394856394563936482734"):', x1)
    x = sreal.t("5.5")
    print('x = srealT("5.5"):', x)

    print()
    x = sreal.t(55)
    print('x = sreal.t(5):', x)
    y = sreal.exp(x)
    print('y = sreal.exp(x):', y)

    z = sreal.exp(5.5)
    print('z = sreal.exp(5.5):', z)
    z = sreal.exp(5)
    print('z = sreal.exp(5):', z)
    z = sreal.exp("5.5")
    print('z = sreal.exp("5.5"):', z)
    print('</H1>')
```

General test code can be found here

```
def functions_with_argument_conversion():
    print()
    print('<H1 Title="Functions with argument conversion">')
    dec = Decimal(1) / Decimal(7)
    print('dec = Decimal(1) / Decimal(7):', dec)
    z = sreal.exp(dec)
    print('z = sreal.exp(dec):', z)
    frac = Fraction("-3/7")
    print('frac = Fraction("-3/7:")', frac)
    z = sreal.exp(frac)
    print('z = sreal.exp(frac):', z)

    print()
```

(continues on next page)

(continued from previous page)

```
    x = sreal.t(5.5)
    print('x = sreal.t(55):', x)
    y = sreal.t(3.3)
    print('y = sreal.t(33):', y)
    z = sreal.pow(x, y)
    print('z = sreal.pow(x, y):        ', z)
    z = sreal.pow(5.5, 3.3)
    print('z = sreal.pow(5.5, 3.3):    ', z)
    z = sreal.pow("5.5", "3.3")
    print('z = sreal.pow("5.5", "3.3"):', z)
    z = sreal.pow(5, 3)
    print('z = sreal.pow(5, 3):', z)

    t = z + 3
    print('t = z + 3:', t)
    print('</H1>')
```

General test code can be found here

```
def arithmetic_operators_with_sreal():
    print()
    print('<H1 Title="Arithmetic operators with sreal">')

    x = sreal.t(5.0)
    y = sreal.t(2.5)
    print('x: ', x)
    print('y: ', y)

    res = x + y
    print('res = x + y:', res)
    res = y + x
    print('res = y + x:', res)

    res = x - y
    print('res = x - y:', res)
    res = y - x
    print('res = y - x:', res)

    res = x * y
    print('res = x * y:', res)
    res = y * x
    print('res = y * x:', res)

    res = x / y
    print('res = x / y:', res)
    res = y / x
    print('res = y / x:', res)
    print('</H1>')
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03a_SReal.py.

1.6.3.4 Examples in Python, `scplx`

General test code for Python can be found here

```
import math
from xlcalcnet import sreal
from decimal import Decimal
from fractions import Fraction
i = 232945639845394856394563936482734638475398457398457 3


def main_tests():
```

(continues on next page)

(continued from previous page)

```
    general_assignments()
    functions_with_argument_conversion()
    arithmetic_operators_with_sreal()
```

General test code can be found here

```
def general_assignments():
    print()
    print('<H1 Title="General assignments and conversions">')

    x = sreal.t(i)
    print('x = sreal.t(i):', x)

    x = sreal.t(5.7)
    print('x = srealT(5.7):', x)

    x = sreal.t(5.7)
    print('x = srealT(5.7):', x)
    x0 = sreal.t(232945639845394856394563936482734 6)
    print('x0 = srealT(232945639845394856394563936482734 6', x0)
    x1 = sreal.t("232945639845394856394563936482734 6")
    print('x1 = sreal.t("232945639845394856394563936482734 6"):', x1)
    x = sreal.t("5.5")
    print('x = srealT("5.5"):', x)

    print()
    x = sreal.t(55)
    print('x = sreal.t(5):', x)
    y = sreal.exp(x)
    print('y = sreal.exp(x):', y)

    z = sreal.exp(5.5)
    print('z = sreal.exp(5.5):', z)
    z = sreal.exp(5)
    print('z = sreal.exp(5):', z)
    z = sreal.exp("5.5")
    print('z = sreal.exp("5.5"):', z)
    print('</H1>')
```

General test code can be found here

```
def functions_with_argument_conversion():
    print()
    print('<H1 Title="Functions with argument conversion">')
    dec = Decimal(1) / Decimal(7)
    print('dec = Decimal(1) / Decimal(7):', dec)
    z = sreal.exp(dec)
    print('z = sreal.exp(dec):', z)
    frac = Fraction("-3/7")
    print('frac = Fraction("-3/7:")', frac)
    z = sreal.exp(frac)
    print('z = sreal.exp(frac):', z)

    print()
    x = sreal.t(5.5)
    print('x = sreal.t(55):', x)
    y = sreal.t(3.3)
    print('y = sreal.t(33):', y)
    z = sreal.pow(x, y)
    print('z = sreal.pow(x, y):        ', z)
    z = sreal.pow(5.5, 3.3)
    print('z = sreal.pow(5.5, 3.3):    ', z)
    z = sreal.pow("5.5", "3.3")
    print('z = sreal.pow("5.5", "3.3"):', z)
    z = sreal.pow(5, 3)
```

(continues on next page)

(continued from previous page)

```
    print('z = sreal.pow(5, 3):', z)

    t = z + 3
    print('t = z + 3:', t)
    print('</H1>')
```

General test code can be found here

```
def arithmetic_operators_with_sreal():
    print()
    print('<H1 Title="Arithmetic operators with sreal">')

    x = sreal.t(5.0)
    y = sreal.t(2.5)
    print('x: ', x)
    print('y: ', y)

    res = x + y
    print('res = x + y:', res)
    res = y + x
    print('res = y + x:', res)

    res = x - y
    print('res = x - y:', res)
    res = y - x
    print('res = y - x:', res)

    res = x * y
    print('res = x * y:', res)
    res = y * x
    print('res = y * x:', res)

    res = x / y
    print('res = x / y:', res)
    res = y / x
    print('res = y / x:', res)
    print('</H1>')
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03b_SCplx.py.

1.6.3.5 Notes regarding the implementation in C# and C++

The C# source code for the module `sreal` can be found here: sreal.cs.

The C# source code for the module `scplx` can be found here: scplx.cs.

The C++ source code supporting scalars in general which is called from `sreal.cs` and `scplx.cs` can be found here: UseSReal.cpp.

The C++ source code which interacts directly with Boost can be found here: BoostSReal.cpp.

The C++ source code supporting Eigen which is called from `sreal.cs` and `scplx.cs` can be found here: UseEigenSReal.cpp.

The C++ source code which interacts directly with Eigen can be found in the folder: BoostEigenMath.cpp.

1.6.4 Binary floating point, double precision: `dreal` and `dcplx`

The C# modules `dreal` and `dcplx` provide support for real and complex floating point numbers in double precision (see https://en.wikipedia.org/wiki/Double-precision_floating-point_format). The corresponding real and complex data types, `Double` and `Complex`, are implemented in hardware and are part of .Net Framework (and are therefore quite fast).

The C# modules `dreal` and `dcplx` fully support Boost.Math and Eigen.

Note: automatic conversion from `Double` in .Net Framework to `float`

Note: no conversion from `Complex` in .Net Framework to `complex` in Python. Explain workarounds.

Note: issues with multiplication scalar * matrix in complex

1.6.4.1 Examples in C#, `dreal`

General test code for C# can be found here

```
#region Usings
using System;
using System.Numerics;
using FixedPrecNet;
#endregion


public static void MainTests()
{
    Console.WriteLine("Demo of some dreal functions");
    DrealTest0();
    DrealTest1();
}
```

General test code for C# can be found here

```
public static void DcplxTest0()
{
    Console.WriteLine("<H1 Title=" + "\"" + "DcplxTest0"  + "\"" + ">");

    var a = dcplx.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = dcplx.abs(a);
    Console.WriteLine("res1 = dcplx.abs(a): {0}", res1);

    var res2 = dcplx.exp(a);
    Console.WriteLine("res2 = dcplx.exp(a): {0}", res2);

    Console.WriteLine("</H1>");
}
```

General test code for C# can be found here

```
public static void DcplxTest1()
{
    Console.WriteLine("<H1 Title=" + "\"" + "DcplxTest1"  + "\"" + ">");

    var a = dcplx.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = dcplx.asin(a);
    Console.WriteLine("res1 = dcplx.asin(a) {0}", res1);

    var res2 = dcplx.sin(a);
    Console.WriteLine("res2 = dcplx.sin(a) {0}", res2);
```

(continues on next page)

(continued from previous page)

```
    Console.WriteLine("</H1>");
}
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04a_Dreal.cs.

1.6.4.2 Examples in C#, `dcplx`

General test code for C# can be found here

```
#region Usings
using System;
using System.Numerics;
using FixedPrecNet;
#endregion


public static void MainTests()
{
    Console.WriteLine("Demo of some dreal functions");
    DrealTest0();
    DrealTest1();
}
```

General test code for C# can be found here

```
public static void DcplxTest0()
{
    Console.WriteLine("<H1 Title=" + "\"" + "DcplxTest0"  + "\"" + ">");

    var a = dcplx.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = dcplx.abs(a);
    Console.WriteLine("res1 = dcplx.abs(a): {0}", res1);

    var res2 = dcplx.exp(a);
    Console.WriteLine("res2 = dcplx.exp(a): {0}", res2);

    Console.WriteLine("</H1>");
}
```

General test code for C# can be found here

```
public static void DcplxTest1()
{
    Console.WriteLine("<H1 Title=" + "\"" + "DcplxTest1"  + "\"" + ">");

    var a = dcplx.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = dcplx.asin(a);
    Console.WriteLine("res1 = dcplx.asin(a) {0}", res1);

    var res2 = dcplx.sin(a);
    Console.WriteLine("res2 = dcplx.sin(a) {0}", res2);

    Console.WriteLine("</H1>");
}
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04b_Dcplx.cs.

1.6.4.3 Examples in Python, dreal

General test code for Python can be found here

```
import math
from xlcalcnet import dreal
from decimal import Decimal
from fractions import Fraction
i = 232945639845394856394563936482734638475398457398457 3


def main_tests():
    general_assignments()
    functions_with_argument_conversion()
    arithmetic_operators_with_dreal()
```

General test code can be found here

```
def general_assignments():
    print()
    print('<H1 Title="General assignments and conversions">')

    x = dreal.t(i)
    print('x = dreal.t(i):', x)

    x = dreal.t(5.7)
    print('x = drealT(5.7):', x)

    x = dreal.t(5.7)
    print('x = drealT(5.7):', x)
    x0 = dreal.t(232945639845394856394563936482734 6)
    print('x0 = drealT(232945639845394856394563936482734 6', x0)
    x1 = dreal.t("232945639845394856394563936482734 6")
    print('x1 = dreal.t("232945639845394856394563936482734 6"):', x1)
    x = dreal.t("5.5")
    print('x = drealT("5.5"):', x)

    print()
    x = dreal.t(55)
    print('x = dreal.t(5):', x)
    y = dreal.exp(x)
    print('y = dreal.exp(x):', y)

    z = dreal.exp(5.5)
    print('z = dreal.exp(5.5):', z)
    z = dreal.exp(5)
    print('z = dreal.exp(5):', z)
    z = dreal.exp("5.5")
    print('z = dreal.exp("5.5"):', z)
    print('</H1>')
```

General test code can be found here

```
def functions_with_argument_conversion():
    print()
    print('<H1 Title="Functions with argument conversion">')
    dec = Decimal(1) / Decimal(7)
    print('dec = Decimal(1) / Decimal(7):', dec)
    z = dreal.exp(dec)
    print('z = dreal.exp(dec):', z)
    frac = Fraction("-3/7")
    print('frac = Fraction("-3/7:")', frac)
    z = dreal.exp(frac)
    print('z = dreal.exp(frac):', z)

    print()
```

(continues on next page)

(continued from previous page)

```
    x = dreal.t(5.5)
    print('x = dreal.t(55):', x)
    y = dreal.t(3.3)
    print('y = dreal.t(33):', y)
    z = dreal.pow(x, y)
    print('z = dreal.pow(x, y):        ', z)
    z = dreal.pow(5.5, 3.3)
    print('z = dreal.pow(5.5, 3.3):    ', z)
    z = dreal.pow("5.5", "3.3")
    print('z = dreal.pow("5.5", "3.3"):', z)
    z = dreal.pow(5, 3)
    print('z = dreal.pow(5, 3):', z)

    t = z + 3
    print('t = z + 3:', t)
    print('</H1>')
```

General test code can be found here

```
def arithmetic_operators_with_dreal():
    print()
    print('<H1 Title="Arithmetic operators with dreal">')

    x = dreal.t(5.0)
    y = dreal.t(2.5)
    print('x: ', x)
    print('y: ', y)

    res = x + y
    print('res = x + y:', res)
    res = y + x
    print('res = y + x:', res)

    res = x - y
    print('res = x - y:', res)
    res = y - x
    print('res = y - x:', res)

    res = x * y
    print('res = x * y:', res)
    res = y * x
    print('res = y * x:', res)

    res = x / y
    print('res = x / y:', res)
    res = y / x
    print('res = y / x:', res)
    print('</H1>')
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04a_DReal.py.

1.6.4.4 Examples in Python, `dcplx`

General test code for Python can be found here

```
import math
from xlcalcnet import dreal
from decimal import Decimal
from fractions import Fraction
i = 232945639845394856394563936482734638475398457398457 3


def main_tests():
```

(continues on next page)

(continued from previous page)

```
    general_assignments()
    functions_with_argument_conversion()
    arithmetic_operators_with_dreal()
```

General test code can be found here

```
def general_assignments():
    print()
    print('<H1 Title="General assignments and conversions">')

    x = dreal.t(i)
    print('x = dreal.t(i):', x)

    x = dreal.t(5.7)
    print('x = drealT(5.7):', x)

    x = dreal.t(5.7)
    print('x = drealT(5.7):', x)
    x0 = dreal.t(232945639845394856394563936482734 6)
    print('x0 = drealT(232945639845394856394563936482734 6', x0)
    x1 = dreal.t("232945639845394856394563936482734 6")
    print('x1 = dreal.t("232945639845394856394563936482734 6"):', x1)
    x = dreal.t("5.5")
    print('x = drealT("5.5"):', x)

    print()
    x = dreal.t(55)
    print('x = dreal.t(5):', x)
    y = dreal.exp(x)
    print('y = dreal.exp(x):', y)

    z = dreal.exp(5.5)
    print('z = dreal.exp(5.5):', z)
    z = dreal.exp(5)
    print('z = dreal.exp(5):', z)
    z = dreal.exp("5.5")
    print('z = dreal.exp("5.5"):', z)
    print('</H1>')
```

General test code can be found here

```
def functions_with_argument_conversion():
    print()
    print('<H1 Title="Functions with argument conversion">')
    dec = Decimal(1) / Decimal(7)
    print('dec = Decimal(1) / Decimal(7):', dec)
    z = dreal.exp(dec)
    print('z = dreal.exp(dec):', z)
    frac = Fraction("-3/7")
    print('frac = Fraction("-3/7:")', frac)
    z = dreal.exp(frac)
    print('z = dreal.exp(frac):', z)

    print()
    x = dreal.t(5.5)
    print('x = dreal.t(55):', x)
    y = dreal.t(3.3)
    print('y = dreal.t(33):', y)
    z = dreal.pow(x, y)
    print('z = dreal.pow(x, y):        ', z)
    z = dreal.pow(5.5, 3.3)
    print('z = dreal.pow(5.5, 3.3):    ', z)
    z = dreal.pow("5.5", "3.3")
    print('z = dreal.pow("5.5", "3.3"):', z)
    z = dreal.pow(5, 3)
```

(continues on next page)

(continued from previous page)

```
    print('z = dreal.pow(5, 3):', z)

    t = z + 3
    print('t = z + 3:', t)
    print('</H1>')
```

General test code can be found here

```
def arithmetic_operators_with_dreal():
    print()
    print('<H1 Title="Arithmetic operators with dreal">')

    x = dreal.t(5.0)
    y = dreal.t(2.5)
    print('x: ', x)
    print('y: ', y)

    res = x + y
    print('res = x + y:', res)
    res = y + x
    print('res = y + x:', res)

    res = x - y
    print('res = x - y:', res)
    res = y - x
    print('res = y - x:', res)

    res = x * y
    print('res = x * y:', res)
    res = y * x
    print('res = y * x:', res)

    res = x / y
    print('res = x / y:', res)
    res = y / x
    print('res = y / x:', res)
    print('</H1>')
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04b_DCplx.py.

1.6.4.5 Notes regarding the implementation in C# and C++

The C# source code for the module `dreal` can be found here: dreal.cs.

The C# source code for the module `dcplx` can be found here: dcplx.cs.

The C++ source code supporting scalars in general which is called from `dreal.cs` and `dcplx.cs` can be found here: UseFReal.cpp.

The C++ source code which interacts directly with Boost can be found here: BoostSReal.cpp, and BoostDouble.cpp.

The C++ source code supporting Eigen which is called from `dreal.cs` and `dcplx.cs` can be found here: UseEigenFReal.cpp.

The C++ source code which interacts directly with Eigen can be found in the folder: BoostEigenMath.cpp.

1.6.5 Binary floating point, extended precision: `ereal` and `ecplx`

The C# modules `ereal` and `ecplx` provide support for real and complex floating point numbers in extended precision (see https://en.wikipedia.org/wiki/Extended_precision). The corresponding real and complex data types, `Extended` and `ExtendedC`, have been added as objects in XlCalcNet (and have therefore the overhead of objects). They are, however, implemented in hardware, and are supported as native types in C++ (when using GCC). This means that the routines in extended precision provided in Boost and Eigen are much faster than the corresponding routines in quadruple precision.

The C# modules `ereal` and `ecplx` fully support Boost.Math and Eigen.

1.6.5.1 Examples in C#, `ereal`

General test code for C# can be found here

```
#region Usings
using System;
using System.Numerics;
using FixedPrecNet;
#endregion


public static void MainTests()
{
    Console.WriteLine("Demo of some ereal functions");
    ErealTest0();
    ErealTest1();
}
```

General test code for C# can be found here

```
public static void EcplxTest0()
{
    Console.WriteLine("<H1 Title=" + "\"" + "EcplxTest0"  + "\"" + ">");

    var a = ecplx.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = ecplx.abs(a);
    Console.WriteLine("res1 = ecplx.abs(a): {0}", res1);

    var res2 = ecplx.exp(a);
    Console.WriteLine("res2 = ecplx.exp(a): {0}", res2);

    Console.WriteLine("</H1>");
}
```

General test code for C# can be found here

```
public static void EcplxTest1()
{
    Console.WriteLine("<H1 Title=" + "\"" + "EcplxTest1"  + "\"" + ">");

    var a = ecplx.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = ecplx.asin(a);
    Console.WriteLine("res1 = ecplx.asin(a) {0}", res1);

    var res2 = ecplx.sin(a);
    Console.WriteLine("res2 = ecplx.sin(a) {0}", res2);

    Console.WriteLine("</H1>");
}
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05a_Ereal.cs.

1.6.5.2 Examples in C#, `ecplx`

General test code for C# can be found here

```
#region Usings
using System;
using System.Numerics;
using FixedPrecNet;
#endregion


public static void MainTests()
{
    Console.WriteLine("Demo of some ereal functions");
    ErealTest0();
    ErealTest1();
}
```

General test code for C# can be found here

```
public static void EcplxTest0()
{
    Console.WriteLine("<H1 Title=" + "\"" + "EcplxTest0"  + "\"" + ">");

    var a = ecplx.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = ecplx.abs(a);
    Console.WriteLine("res1 = ecplx.abs(a): {0}", res1);

    var res2 = ecplx.exp(a);
    Console.WriteLine("res2 = ecplx.exp(a): {0}", res2);

    Console.WriteLine("</H1>");
}
```

General test code for C# can be found here

```
public static void EcplxTest1()
{
    Console.WriteLine("<H1 Title=" + "\"" + "EcplxTest1"  + "\"" + ">");

    var a = ecplx.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = ecplx.asin(a);
    Console.WriteLine("res1 = ecplx.asin(a) {0}", res1);

    var res2 = ecplx.sin(a);
    Console.WriteLine("res2 = ecplx.sin(a) {0}", res2);

    Console.WriteLine("</H1>");
}
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05b_Ecplx.cs.

1.6.5.3 Examples in Python, ereal

General test code for Python can be found here

```
import math
from xlcalcnet import ereal
from decimal import Decimal
from fractions import Fraction
i = 232945639845394856394563936482734638475398457398457 3
```

```
def main_tests():
    general_assignments()
    functions_with_argument_conversion()
    arithmetic_operators_with_ereal()
```

General test code can be found here

```
def general_assignments():
    print()
    print('<H1 Title="General assignments and conversions">')

    x = ereal.t(i)
    print('x = ereal.t(i):', x)

    x = ereal.t(5.7)
    print('x = erealT(5.7):', x)

    x = ereal.t(5.7)
    print('x = erealT(5.7):', x)
    x0 = ereal.t(232945639845394856394563936482734 6)
    print('x0 = erealT(232945639845394856394563936482734 6', x0)
    x1 = ereal.t("232945639845394856394563936482734 6")
    print('x1 = ereal.t("232945639845394856394563936482734 6"):', x1)
    x = ereal.t("5.5")
    print('x = erealT("5.5"):', x)

    print()
    x = ereal.t(55)
    print('x = ereal.t(5):', x)
    y = ereal.exp(x)
    print('y = ereal.exp(x):', y)

    z = ereal.exp(5.5)
    print('z = ereal.exp(5.5):', z)
    z = ereal.exp(5)
    print('z = ereal.exp(5):', z)
    z = ereal.exp("5.5")
    print('z = ereal.exp("5.5"):', z)
    print('</H1>')
```

General test code can be found here

```
def functions_with_argument_conversion():
    print()
    print('<H1 Title="Functions with argument conversion">')
    dec = Decimal(1) / Decimal(7)
    print('dec = Decimal(1) / Decimal(7):', dec)
    z = ereal.exp(dec)
    print('z = ereal.exp(dec):', z)
    frac = Fraction("-3/7")
    print('frac = Fraction("-3/7:")', frac)
    z = ereal.exp(frac)
    print('z = ereal.exp(frac):', z)

    print()
```

(continues on next page)

(continued from previous page)

```
    x = ereal.t(5.5)
    print('x = ereal.t(55):', x)
    y = ereal.t(3.3)
    print('y = ereal.t(33):', y)
    z = ereal.pow(x, y)
    print('z = ereal.pow(x, y):        ', z)
    z = ereal.pow(5.5, 3.3)
    print('z = ereal.pow(5.5, 3.3):    ', z)
    z = ereal.pow("5.5", "3.3")
    print('z = ereal.pow("5.5", "3.3"):', z)
    z = ereal.pow(5, 3)
    print('z = ereal.pow(5, 3):', z)

    t = z + 3
    print('t = z + 3:', t)
    print('</H1>')
```

General test code can be found here

```
def arithmetic_operators_with_ereal():
    print()
    print('<H1 Title="Arithmetic operators with ereal">')

    x = ereal.t(5.0)
    y = ereal.t(2.5)
    print('x: ', x)
    print('y: ', y)

    res = x + y
    print('res = x + y:', res)
    res = y + x
    print('res = y + x:', res)

    res = x - y
    print('res = x - y:', res)
    res = y - x
    print('res = y - x:', res)

    res = x * y
    print('res = x * y:', res)
    res = y * x
    print('res = y * x:', res)

    res = x / y
    print('res = x / y:', res)
    res = y / x
    print('res = y / x:', res)
    print('</H1>')
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05a_EReal.py.

1.6.5.4 Examples in Python, `ecplx`

General test code for Python can be found here

```
import math
from xlcalcnet import ereal
from decimal import Decimal
from fractions import Fraction
i = 232945639845394856394563936482734638475398457398457 3


def main_tests():
```

(continues on next page)

(continued from previous page)

```
    general_assignments()
    functions_with_argument_conversion()
    arithmetic_operators_with_ereal()
```

General test code can be found here

```
def general_assignments():
    print()
    print('<H1 Title="General assignments and conversions">')

    x = ereal.t(i)
    print('x = ereal.t(i):', x)

    x = ereal.t(5.7)
    print('x = erealT(5.7):', x)

    x = ereal.t(5.7)
    print('x = erealT(5.7):', x)
    x0 = ereal.t(232945639845394856394563936482734 6)
    print('x0 = erealT(232945639845394856394563936482734 6', x0)
    x1 = ereal.t("232945639845394856394563936482734 6")
    print('x1 = ereal.t("232945639845394856394563936482734 6"):', x1)
    x = ereal.t("5.5")
    print('x = erealT("5.5"):', x)

    print()
    x = ereal.t(55)
    print('x = ereal.t(5):', x)
    y = ereal.exp(x)
    print('y = ereal.exp(x):', y)

    z = ereal.exp(5.5)
    print('z = ereal.exp(5.5):', z)
    z = ereal.exp(5)
    print('z = ereal.exp(5):', z)
    z = ereal.exp("5.5")
    print('z = ereal.exp("5.5"):', z)
    print('</H1>')
```

General test code can be found here

```
def functions_with_argument_conversion():
    print()
    print('<H1 Title="Functions with argument conversion">')
    dec = Decimal(1) / Decimal(7)
    print('dec = Decimal(1) / Decimal(7):', dec)
    z = ereal.exp(dec)
    print('z = ereal.exp(dec):', z)
    frac = Fraction("-3/7")
    print('frac = Fraction("-3/7:")', frac)
    z = ereal.exp(frac)
    print('z = ereal.exp(frac):', z)

    print()
    x = ereal.t(5.5)
    print('x = ereal.t(55):', x)
    y = ereal.t(3.3)
    print('y = ereal.t(33):', y)
    z = ereal.pow(x, y)
    print('z = ereal.pow(x, y):        ', z)
    z = ereal.pow(5.5, 3.3)
    print('z = ereal.pow(5.5, 3.3):    ', z)
    z = ereal.pow("5.5", "3.3")
    print('z = ereal.pow("5.5", "3.3"):', z)
    z = ereal.pow(5, 3)
```

(continues on next page)

(continued from previous page)

```
    print('z = ereal.pow(5, 3):', z)

    t = z + 3
    print('t = z + 3:', t)
    print('</H1>')
```

General test code can be found here

```
def arithmetic_operators_with_ereal():
    print()
    print('<H1 Title="Arithmetic operators with ereal">')

    x = ereal.t(5.0)
    y = ereal.t(2.5)
    print('x: ', x)
    print('y: ', y)

    res = x + y
    print('res = x + y:', res)
    res = y + x
    print('res = y + x:', res)

    res = x - y
    print('res = x - y:', res)
    res = y - x
    print('res = y - x:', res)

    res = x * y
    print('res = x * y:', res)
    res = y * x
    print('res = y * x:', res)

    res = x / y
    print('res = x / y:', res)
    res = y / x
    print('res = y / x:', res)
    print('</H1>')
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05b_ECplx.py.

1.6.5.5 Notes regarding the implementation in C# and C++

The C# source code for the module `ereal` can be found here: ereal.cs.

The C# source code for the module `ecplx` can be found here: ecplx.cs.

The C++ source code supporting scalars in general which is called from `ereal.cs` and `ecplx.cs` can be found here: UseXReal.cpp.

The C++ source code which interacts directly with Boost can be found here: BoostXReal.cpp.

The C++ source code supporting Eigen which is called from `ereal.cs` and `ecplx.cs` can be found here: UseEigenXReal.cpp.

The C++ source code which interacts directly with Eigen can be found in the folder: BoostEigenMath.cpp.

1.6.6 Binary floating point, quadruple precision: `qreal` and `qcplx`

The C# modules `qreal` and `qcplx` provide support for real and complex floating point numbers in quadruple precision (see https://en.wikipedia.org/wiki/Quadruple-precision_floating-point_format). The corresponding real and complex data types, `Quadruple` and `QuadrupleC`, have been added as objects in XlCalcNet (and have therefore the overhead of objects). They are implemented in software, using the `float128` data type of Boost Multiprecision. This means that the routines in quadruple precision provided in Boost and Eigen are much slower than the corresponding routines in extended precision.

The C# modules `qreal` and `qcplx` fully support Boost.Math and Eigen.

1.6.6.1 Examples in C#, `qreal`

General test code for C# can be found here

```
#region Usings
using System;
using System.Numerics;
using FixedPrecNet;
#endregion


public static void MainTests()
{
    Console.WriteLine("Demo of some qreal functions");
    QrealTest0();
    QrealTest1();
}
```

General test code for C# can be found here

```
public static void QcplxTest0()
{
    Console.WriteLine("<H1 Title=" + "\"" + "QcplxTest0"  + "\"" + ">");

    var a = qcplx.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = qcplx.abs(a);
    Console.WriteLine("res1 = qcplx.abs(a): {0}", res1);

    var res2 = qcplx.exp(a);
    Console.WriteLine("res2 = qcplx.exp(a): {0}", res2);

    Console.WriteLine("</H1>");
}
```

General test code for C# can be found here

```
public static void QcplxTest1()
{
    Console.WriteLine("<H1 Title=" + "\"" + "QcplxTest1"  + "\"" + ">");

    var a = qcplx.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = qcplx.asin(a);
    Console.WriteLine("res1 = qcplx.asin(a) {0}", res1);

    var res2 = qcplx.sin(a);
    Console.WriteLine("res2 = qcplx.sin(a) {0}", res2);

    Console.WriteLine("</H1>");
}
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06a_Qreal.cs.

1.6.6.2 Examples in C#, `qcplx`

General test code for C# can be found here

```
#region Usings
using System;
using System.Numerics;
using FixedPrecNet;
#endregion


public static void MainTests()
{
    Console.WriteLine("Demo of some qreal functions");
    QrealTest0();
    QrealTest1();
}
```

General test code for C# can be found here

```
public static void QcplxTest0()
{
    Console.WriteLine("<H1 Title=" + "\"" + "QcplxTest0"  + "\"" + ">");

    var a = qcplx.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = qcplx.abs(a);
    Console.WriteLine("res1 = qcplx.abs(a): {0}", res1);

    var res2 = qcplx.exp(a);
    Console.WriteLine("res2 = qcplx.exp(a): {0}", res2);

    Console.WriteLine("</H1>");
}
```

General test code for C# can be found here

```
public static void QcplxTest1()
{
    Console.WriteLine("<H1 Title=" + "\"" + "QcplxTest1"  + "\"" + ">");

    var a = qcplx.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = qcplx.asin(a);
    Console.WriteLine("res1 = qcplx.asin(a) {0}", res1);

    var res2 = qcplx.sin(a);
    Console.WriteLine("res2 = qcplx.sin(a) {0}", res2);

    Console.WriteLine("</H1>");
}
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02b_Qcplx.cs.

1.6.6.3 Examples in Python, qreal

General test code for Python can be found here

```
import math
from xlcalcnet import qreal
from decimal import Decimal
from fractions import Fraction
i = 232945639845394856394563936482734638475398457398457 3


def main_tests():
    general_assignments()
    functions_with_argument_conversion()
    arithmetic_operators_with_qreal()
```

General test code can be found here

```
def general_assignments():
    print()
    print('<H1 Title="General assignments and conversions">')

    x = qreal.t(i)
    print('x = qreal.t(i):', x)

    x = qreal.t(5.7)
    print('x = qrealT(5.7):', x)

    x = qreal.t(5.7)
    print('x = qrealT(5.7):', x)
    x0 = qreal.t(232945639845394856394563936482734 6)
    print('x0 = qrealT(232945639845394856394563936482734 6', x0)
    x1 = qreal.t("232945639845394856394563936482734 6")
    print('x1 = qreal.t("232945639845394856394563936482734 6"):', x1)
    x = qreal.t("5.5")
    print('x = qrealT("5.5"):', x)

    print()
    x = qreal.t(55)
    print('x = qreal.t(5):', x)
    y = qreal.exp(x)
    print('y = qreal.exp(x):', y)

    z = qreal.exp(5.5)
    print('z = qreal.exp(5.5):', z)
    z = qreal.exp(5)
    print('z = qreal.exp(5):', z)
    z = qreal.exp("5.5")
    print('z = qreal.exp("5.5"):', z)
    print('</H1>')
```

General test code can be found here

```
def functions_with_argument_conversion():
    print()
    print('<H1 Title="Functions with argument conversion">')
    dec = Decimal(1) / Decimal(7)
    print('dec = Decimal(1) / Decimal(7):', dec)
    z = qreal.exp(dec)
    print('z = qreal.exp(dec):', z)
    frac = Fraction("-3/7")
    print('frac = Fraction("-3/7:")', frac)
    z = qreal.exp(frac)
    print('z = qreal.exp(frac):', z)

    print()
```

(continues on next page)

(continued from previous page)

```
    x = qreal.t(5.5)
    print('x = qreal.t(55):', x)
    y = qreal.t(3.3)
    print('y = qreal.t(33):', y)
    z = qreal.pow(x, y)
    print('z = qreal.pow(x, y):        ', z)
    z = qreal.pow(5.5, 3.3)
    print('z = qreal.pow(5.5, 3.3):    ', z)
    z = qreal.pow("5.5", "3.3")
    print('z = qreal.pow("5.5", "3.3"):', z)
    z = qreal.pow(5, 3)
    print('z = qreal.pow(5, 3):', z)

    t = z + 3
    print('t = z + 3:', t)
    print('</H1>')
```

General test code can be found here

```
def arithmetic_operators_with_qreal():
    print()
    print('<H1 Title="Arithmetic operators with qreal">')

    x = qreal.t(5.0)
    y = qreal.t(2.5)
    print('x: ', x)
    print('y: ', y)

    res = x + y
    print('res = x + y:', res)
    res = y + x
    print('res = y + x:', res)

    res = x - y
    print('res = x - y:', res)
    res = y - x
    print('res = y - x:', res)

    res = x * y
    print('res = x * y:', res)
    res = y * x
    print('res = y * x:', res)

    res = x / y
    print('res = x / y:', res)
    res = y / x
    print('res = y / x:', res)
    print('</H1>')
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06a_QReal.py.

1.6.6.4 Examples in Python, `qcplx`

General test code for Python can be found here

```
import math
from xlcalcnet import qreal
from decimal import Decimal
from fractions import Fraction
i = 232945639845394856394563936482734638475398457398457 3


def main_tests():
```

(continues on next page)

(continued from previous page)

```
    general_assignments()
    functions_with_argument_conversion()
    arithmetic_operators_with_qreal()
```

General test code can be found here

```
def general_assignments():
    print()
    print('<H1 Title="General assignments and conversions">')

    x = qreal.t(i)
    print('x = qreal.t(i):', x)

    x = qreal.t(5.7)
    print('x = qrealT(5.7):', x)

    x = qreal.t(5.7)
    print('x = qrealT(5.7):', x)
    x0 = qreal.t(232945639845394856394563936482734 6)
    print('x0 = qrealT(232945639845394856394563936482734 6', x0)
    x1 = qreal.t("232945639845394856394563936482734 6")
    print('x1 = qreal.t("232945639845394856394563936482734 6"):', x1)
    x = qreal.t("5.5")
    print('x = qrealT("5.5"):', x)

    print()
    x = qreal.t(55)
    print('x = qreal.t(5):', x)
    y = qreal.exp(x)
    print('y = qreal.exp(x):', y)

    z = qreal.exp(5.5)
    print('z = qreal.exp(5.5):', z)
    z = qreal.exp(5)
    print('z = qreal.exp(5):', z)
    z = qreal.exp("5.5")
    print('z = qreal.exp("5.5"):', z)
    print('</H1>')
```

General test code can be found here

```
def functions_with_argument_conversion():
    print()
    print('<H1 Title="Functions with argument conversion">')
    dec = Decimal(1) / Decimal(7)
    print('dec = Decimal(1) / Decimal(7):', dec)
    z = qreal.exp(dec)
    print('z = qreal.exp(dec):', z)
    frac = Fraction("-3/7")
    print('frac = Fraction("-3/7:")', frac)
    z = qreal.exp(frac)
    print('z = qreal.exp(frac):', z)

    print()
    x = qreal.t(5.5)
    print('x = qreal.t(55):', x)
    y = qreal.t(3.3)
    print('y = qreal.t(33):', y)
    z = qreal.pow(x, y)
    print('z = qreal.pow(x, y):        ', z)
    z = qreal.pow(5.5, 3.3)
    print('z = qreal.pow(5.5, 3.3):    ', z)
    z = qreal.pow("5.5", "3.3")
    print('z = qreal.pow("5.5", "3.3"):', z)
    z = qreal.pow(5, 3)
```

(continues on next page)

(continued from previous page)

```
    print('z = qreal.pow(5, 3):', z)

    t = z + 3
    print('t = z + 3:', t)
    print('</H1>')
```

General test code can be found here

```
def arithmetic_operators_with_qreal():
    print()
    print('<H1 Title="Arithmetic operators with qreal">')

    x = qreal.t(5.0)
    y = qreal.t(2.5)
    print('x: ', x)
    print('y: ', y)

    res = x + y
    print('res = x + y:', res)
    res = y + x
    print('res = y + x:', res)

    res = x - y
    print('res = x - y:', res)
    res = y - x
    print('res = y - x:', res)

    res = x * y
    print('res = x * y:', res)
    res = y * x
    print('res = y * x:', res)

    res = x / y
    print('res = x / y:', res)
    res = y / x
    print('res = y / x:', res)
    print('</H1>')
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06b_QCplx.py.

1.6.6.5 Notes regarding the implementation in C# and C++

The C# source code for the module `qreal` can be found here: qreal.cs.

The C# source code for the module `qcplx` can be found here: qcplx.cs.

The C++ source code supporting scalars in general which is called from `qreal.cs` and `qcplx.cs` can be found here: UseQReal.cpp.

The C++ source code which interacts directly with Boost can be found here: BoostQReal.cpp.

The C++ source code supporting Eigen which is called from `qreal.cs` and `qcplx.cs` can be found here: UseEigenQReal.cpp.

The C++ source code which interacts directly with Eigen can be found in the folder: BoostEigenMath.cpp.

1.6.7 Binary floating point, octuple precision: `oreal` and `ocplx`

The C# modules `oreal` and `ocplx` provide support for real and complex floating point numbers in octuple precision (see https://en.wikipedia.org/wiki/Octuple-precision_floating-point_format). The corresponding real and complex data types, `Octuple` and `OctupleC`, have been added as objects in XlCalcNet (and have therefore the overhead of objects). They are implemented in software, using the `cpp_bin_float_oct` data type of Boost Multiprecision. The routines in octuple precision provided in Boost and Eigen are typically much slower than the corresponding routines in quadruple precision.

The C# modules `oreal` and `ocplx` fully support Boost.Math and Eigen.

1.6.7.1 Examples in C#, `oreal`

General test code for C# can be found here

```
#region Usings
using System;
using System.Numerics;
using FixedPrecNet;
#endregion


public static void MainTests()
{
    Console.WriteLine("Demo of some oreal functions");
    OrealTest0();
    OrealTest1();
}
```

General test code for C# can be found here

```
public static void OcplxTest0()
{
    Console.WriteLine("<H1 Title=" + "\"" + "OcplxTest0"  + "\"" + ">");

    var a = ocplx.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = ocplx.abs(a);
    Console.WriteLine("res1 = ocplx.abs(a): {0}", res1);

    var res2 = ocplx.exp(a);
    Console.WriteLine("res2 = ocplx.exp(a): {0}", res2);

    Console.WriteLine("</H1>");
}
```

General test code for C# can be found here

```
public static void OcplxTest1()
{
    Console.WriteLine("<H1 Title=" + "\"" + "OcplxTest1"  + "\"" + ">");

    var a = ocplx.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = ocplx.asin(a);
    Console.WriteLine("res1 = ocplx.asin(a) {0}", res1);

    var res2 = ocplx.sin(a);
    Console.WriteLine("res2 = ocplx.sin(a) {0}", res2);

    Console.WriteLine("</H1>");
}
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07a_Oreal.cs.

1.6.7.2 Examples in C#, `ocplx`

General test code for C# can be found here

```
#region Usings
using System;
using System.Numerics;
using FixedPrecNet;
#endregion


public static void MainTests()
{
    Console.WriteLine("Demo of some oreal functions");
    OrealTest0();
    OrealTest1();
}
```

General test code for C# can be found here

```
public static void OcplxTest0()
{
    Console.WriteLine("<H1 Title=" + "\"" + "OcplxTest0"  + "\"" + ">");

    var a = ocplx.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = ocplx.abs(a);
    Console.WriteLine("res1 = ocplx.abs(a): {0}", res1);

    var res2 = ocplx.exp(a);
    Console.WriteLine("res2 = ocplx.exp(a): {0}", res2);

    Console.WriteLine("</H1>");
}
```

General test code for C# can be found here

```
public static void OcplxTest1()
{
    Console.WriteLine("<H1 Title=" + "\"" + "OcplxTest1"  + "\"" + ">");

    var a = ocplx.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = ocplx.asin(a);
    Console.WriteLine("res1 = ocplx.asin(a) {0}", res1);

    var res2 = ocplx.sin(a);
    Console.WriteLine("res2 = ocplx.sin(a) {0}", res2);

    Console.WriteLine("</H1>");
}
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07b_Ocplx.cs.

1.6.7.3 Examples in Python, oreal

General test code for Python can be found here

```
import math
from xlcalcnet import oreal
from decimal import Decimal
from fractions import Fraction
i = 232945639845394856394563936482734638475398457398457 3


def main_tests():
    general_assignments()
    functions_with_argument_conversion()
    arithmetic_operators_with_oreal()
```

General test code can be found here

```
def general_assignments():
    print()
    print('<H1 Title="General assignments and conversions">')

    x = oreal.t(i)
    print('x = oreal.t(i):', x)

    x = oreal.t(5.7)
    print('x = orealT(5.7):', x)

    x = oreal.t(5.7)
    print('x = orealT(5.7):', x)
    x0 = oreal.t(232945639845394856394563936482734 6)
    print('x0 = orealT(232945639845394856394563936482734 6', x0)
    x1 = oreal.t("232945639845394856394563936482734 6")
    print('x1 = oreal.t("232945639845394856394563936482734 6"):', x1)
    x = oreal.t("5.5")
    print('x = orealT("5.5"):', x)

    print()
    x = oreal.t(55)
    print('x = oreal.t(5):', x)
    y = oreal.exp(x)
    print('y = oreal.exp(x):', y)

    z = oreal.exp(5.5)
    print('z = oreal.exp(5.5):', z)
    z = oreal.exp(5)
    print('z = oreal.exp(5):', z)
    z = oreal.exp("5.5")
    print('z = oreal.exp("5.5"):', z)
    print('</H1>')
```

General test code can be found here

```
def functions_with_argument_conversion():
    print()
    print('<H1 Title="Functions with argument conversion">')
    dec = Decimal(1) / Decimal(7)
    print('dec = Decimal(1) / Decimal(7):', dec)
    z = oreal.exp(dec)
    print('z = oreal.exp(dec):', z)
    frac = Fraction("-3/7")
    print('frac = Fraction("-3/7:")', frac)
    z = oreal.exp(frac)
    print('z = oreal.exp(frac):', z)

    print()
```

(continues on next page)

(continued from previous page)

```
    x = oreal.t(5.5)
    print('x = oreal.t(55):', x)
    y = oreal.t(3.3)
    print('y = oreal.t(33):', y)
    z = oreal.pow(x, y)
    print('z = oreal.pow(x, y):        ', z)
    z = oreal.pow(5.5, 3.3)
    print('z = oreal.pow(5.5, 3.3):    ', z)
    z = oreal.pow("5.5", "3.3")
    print('z = oreal.pow("5.5", "3.3"):', z)
    z = oreal.pow(5, 3)
    print('z = oreal.pow(5, 3):', z)

    t = z + 3
    print('t = z + 3:', t)
    print('</H1>')
```

General test code can be found here

```
def arithmetic_operators_with_oreal():
    print()
    print('<H1 Title="Arithmetic operators with oreal">')

    x = oreal.t(5.0)
    y = oreal.t(2.5)
    print('x: ', x)
    print('y: ', y)

    res = x + y
    print('res = x + y:', res)
    res = y + x
    print('res = y + x:', res)

    res = x - y
    print('res = x - y:', res)
    res = y - x
    print('res = y - x:', res)

    res = x * y
    print('res = x * y:', res)
    res = y * x
    print('res = y * x:', res)

    res = x / y
    print('res = x / y:', res)
    res = y / x
    print('res = y / x:', res)
    print('</H1>')
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07a_OReal.py.

1.6.7.4 Examples in Python, `ocplx`

General test code for Python can be found here

```
import math
from xlcalcnet import oreal
from decimal import Decimal
from fractions import Fraction
i = 232945639845394856394563936482734638475398457398457 3


def main_tests():
```

(continues on next page)

(continued from previous page)

```
    general_assignments()
    functions_with_argument_conversion()
    arithmetic_operators_with_oreal()
```

General test code can be found here

```
def general_assignments():
    print()
    print('<H1 Title="General assignments and conversions">')

    x = oreal.t(i)
    print('x = oreal.t(i):', x)

    x = oreal.t(5.7)
    print('x = orealT(5.7):', x)

    x = oreal.t(5.7)
    print('x = orealT(5.7):', x)
    x0 = oreal.t(232945639845394856394563936482734 6)
    print('x0 = orealT(232945639845394856394563936482734 6', x0)
    x1 = oreal.t("232945639845394856394563936482734 6")
    print('x1 = oreal.t("232945639845394856394563936482734 6"):', x1)
    x = oreal.t("5.5")
    print('x = orealT("5.5"):', x)

    print()
    x = oreal.t(55)
    print('x = oreal.t(5):', x)
    y = oreal.exp(x)
    print('y = oreal.exp(x):', y)

    z = oreal.exp(5.5)
    print('z = oreal.exp(5.5):', z)
    z = oreal.exp(5)
    print('z = oreal.exp(5):', z)
    z = oreal.exp("5.5")
    print('z = oreal.exp("5.5"):', z)
    print('</H1>')
```

General test code can be found here

```
def functions_with_argument_conversion():
    print()
    print('<H1 Title="Functions with argument conversion">')
    dec = Decimal(1) / Decimal(7)
    print('dec = Decimal(1) / Decimal(7):', dec)
    z = oreal.exp(dec)
    print('z = oreal.exp(dec):', z)
    frac = Fraction("-3/7")
    print('frac = Fraction("-3/7:")', frac)
    z = oreal.exp(frac)
    print('z = oreal.exp(frac):', z)

    print()
    x = oreal.t(5.5)
    print('x = oreal.t(55):', x)
    y = oreal.t(3.3)
    print('y = oreal.t(33):', y)
    z = oreal.pow(x, y)
    print('z = oreal.pow(x, y):        ', z)
    z = oreal.pow(5.5, 3.3)
    print('z = oreal.pow(5.5, 3.3):    ', z)
    z = oreal.pow("5.5", "3.3")
    print('z = oreal.pow("5.5", "3.3"):', z)
    z = oreal.pow(5, 3)
```

(continues on next page)

(continued from previous page)

```
    print('z = oreal.pow(5, 3):', z)

    t = z + 3
    print('t = z + 3:', t)
    print('</H1>')
```

General test code can be found here

```
def arithmetic_operators_with_oreal():
    print()
    print('<H1 Title="Arithmetic operators with oreal">')

    x = oreal.t(5.0)
    y = oreal.t(2.5)
    print('x: ', x)
    print('y: ', y)

    res = x + y
    print('res = x + y:', res)
    res = y + x
    print('res = y + x:', res)

    res = x - y
    print('res = x - y:', res)
    res = y - x
    print('res = y - x:', res)

    res = x * y
    print('res = x * y:', res)
    res = y * x
    print('res = y * x:', res)

    res = x / y
    print('res = x / y:', res)
    res = y / x
    print('res = y / x:', res)
    print('</H1>')
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07b_OCplx.py.

1.6.7.5 Notes regarding the implementation in C# and C++

The C# source code for the module `oreal` can be found here: oreal.cs.

The C# source code for the module `ocplx` can be found here: ocplx.cs.

The C++ source code supporting scalars in general which is called from `oreal.cs` and `ocplx.cs` can be found here: UseOReal.cpp.

The C++ source code which interacts directly with Boost can be found here: BoostSReal.cpp.

The C++ source code supporting Eigen which is called from `oreal.cs` and `ocplx.cs` can be found here: UseEigenSReal.cpp.

The C++ source code which interacts directly with Eigen can be found in the folder: BoostEigenMath.cpp.

1.6.8 Use of Numpy with scalar functions written in C#: `np53`, `np53c`

Some text

1.6.9 Building the underlying C#, C/C++ and Pascal libraries

On the Pascal/C/C++ side, XlCalcNet uses DAMath, Boost Math, Boost Multiprecision, Boost Odeint and Eigen to provide numerical functions in single, double, extended, quadruple and octuple precision, which are available to the user both from C# and Python.

The SourceOfBasicLibraries repository provides copies of the source code of the underlying numerical libraries, which are required to build the XlCalcNet library. These copies also include small patches, as required. They are provided to make it easier to reproduce the compilation results, as distributed as part of the XlCalcNet repository.

1.6.9.1 Installing MSYS2

Text descibing MSYS2

1.6.9.2 Eigen, (version 5.0.1)

Text descibing Eigen

1.6.9.3 Boost, (version 1.90.0)

Text descibing Boost

1.6.9.4 DAMath (version 2.27)

Text descibing DAMath

1.6.9.5 FixedPreNet (version 1.0.0)

Text descibing FixedPreNet

1.7 Mathematical functions based on XlCalcNet2 (C#, can be called from Python)

Assuming that the Python batch files have been installed as described *here*, XlCalcNet2 can be installed by double-clicking on the batch file `A13installxlcalcnet2.bat` in the `C:\Python313` folder.

1.7.1 Binary floating point, multiple precision: `mreal`, `mcplx`

The C# modules `mreal` and `mcplx` provide support for real and complex floating point numbers with an arbitrary precision significand and a fixed size exponent. The corresponding real and complex data types, `Mpfr` and `MpfrC`, have been added as objects in XlCalcNet2 (and have therefore the overhead of objects). They are implemented in software, using the `mpfr_t` data type of the MPFR library (see https://www.mpfr.org/) and the `mpc_t` data type of the MPC library (see https://www.multiprecision.org/mpc/).

The C# modules `mreal` and `mcplx` fully support Boost.Math and Eigen.

1.7.1.1 Examples in C#, `mreal`

General test code for C# can be found here

```
#region Usings
using System;
using System.Numerics;
using FixedPrecNet;
#endregion


public static void MainTests()
{
    Console.WriteLine("Demo of some mreal functions");
    MrealTest0();
    MrealTest1();
}
```

General test code for C# can be found here

```
public static void McplxTest0()
{
    Console.WriteLine("<H1 Title=" + "\"" + "McplxTest0"  + "\"" + ">");

    var a = mcplx.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = mcplx.abs(a);
    Console.WriteLine("res1 = mcplx.abs(a): {0}", res1);

    var res2 = mcplx.exp(a);
    Console.WriteLine("res2 = mcplx.exp(a): {0}", res2);

    Console.WriteLine("</H1>");
}
```

General test code for C# can be found here

```
public static void McplxTest1()
{
    Console.WriteLine("<H1 Title=" + "\"" + "McplxTest1"  + "\"" + ">");

    var a = mcplx.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = mcplx.asin(a);
    Console.WriteLine("res1 = mcplx.asin(a) {0}", res1);
```

(continues on next page)

(continued from previous page)

```
    var res2 = mcplx.sin(a);
    Console.WriteLine("res2 = mcplx.sin(a) {0}", res2);

    Console.WriteLine("</H1>");
}
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01a_Mreal.cs.

1.7.1.2 Examples in C#, `mcplx`

General test code for C# can be found here

```
#region Usings
using System;
using System.Numerics;
using FixedPrecNet;
#endregion


public static void MainTests()
{
    Console.WriteLine("Demo of some mreal functions");
    MrealTest0();
    MrealTest1();
}
```

General test code for C# can be found here

```
public static void McplxTest0()
{
    Console.WriteLine("<H1 Title=" + "\"" + "McplxTest0"  + "\"" + ">");

    var a = mcplx.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = mcplx.abs(a);
    Console.WriteLine("res1 = mcplx.abs(a): {0}", res1);

    var res2 = mcplx.exp(a);
    Console.WriteLine("res2 = mcplx.exp(a): {0}", res2);

    Console.WriteLine("</H1>");
}
```

General test code for C# can be found here

```
public static void McplxTest1()
{
    Console.WriteLine("<H1 Title=" + "\"" + "McplxTest1"  + "\"" + ">");

    var a = mcplx.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = mcplx.asin(a);
    Console.WriteLine("res1 = mcplx.asin(a) {0}", res1);

    var res2 = mcplx.sin(a);
    Console.WriteLine("res2 = mcplx.sin(a) {0}", res2);

    Console.WriteLine("</H1>");
}
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01b_Mcplx.cs.

1.7.1.3 Examples in Python, `mreal`

General test code for Python can be found here

```
import math
from xlcalcnet import mreal
from decimal import Decimal
from fractions import Fraction
i = 232945639845394856394563936482734638475398457398457 3984573


def main_tests():
    general_assignments()
    functions_with_argument_conversion()
    arithmetic_operators_with_mreal()
```

General test code can be found here

```
def general_assignments():
    print()
    print('<H1 Title="General assignments and conversions">')

    x = mreal.t(i)
    print('x = mreal.t(i):', x)

    x = mreal.t(5.7)
    print('x = mrealT(5.7):', x)

    x = mreal.t(5.7)
    print('x = mrealT(5.7):', x)
    x0 = mreal.t(232945639845394856394563936482734 6)
    print('x0 = mrealT(232945639845394856394563936482734 6', x0)
    x1 = mreal.t("232945639845394856394563936482734 6")
    print('x1 = mreal.t("232945639845394856394563936482734 6"):', x1)
    x = mreal.t("5.5")
    print('x = mrealT("5.5"):', x)

    print()
    x = mreal.t(55)
    print('x = mreal.t(5):', x)
    y = mreal.exp(x)
    print('y = mreal.exp(x):', y)

    z = mreal.exp(5.5)
    print('z = mreal.exp(5.5):', z)
    z = mreal.exp(5)
    print('z = mreal.exp(5):', z)
    z = mreal.exp("5.5")
    print('z = mreal.exp("5.5"):', z)
    print('</H1>')
```

General test code can be found here

```
def functions_with_argument_conversion():
    print()
    print('<H1 Title="Functions with argument conversion">')
    dec = Decimal(1) / Decimal(7)
    print('dec = Decimal(1) / Decimal(7):', dec)
    z = mreal.exp(dec)
    print('z = mreal.exp(dec):', z)
    frac = Fraction("-3/7")
    print('frac = Fraction("-3/7:")', frac)
```

(continues on next page)

(continued from previous page)

```
    z = mreal.exp(frac)
    print('z = mreal.exp(frac):', z)

    print()
    x = mreal.t(5.5)
    print('x = mreal.t(55):', x)
    y = mreal.t(3.3)
    print('y = mreal.t(33):', y)
    z = mreal.pow(x, y)
    print('z = mreal.pow(x, y):        ', z)
    z = mreal.pow(5.5, 3.3)
    print('z = mreal.pow(5.5, 3.3):    ', z)
    z = mreal.pow("5.5", "3.3")
    print('z = mreal.pow("5.5", "3.3"):', z)
    z = mreal.pow(5, 3)
    print('z = mreal.pow(5, 3):', z)

    t = z + 3
    print('t = z + 3:', t)
    print('</H1>')
```

General test code can be found here

```
def arithmetic_operators_with_mreal():
    print()
    print('<H1 Title="Arithmetic operators with mreal">')

    x = mreal.t(5.0)
    y = mreal.t(2.5)
    print('x: ', x)
    print('y: ', y)

    res = x + y
    print('res = x + y:', res)
    res = y + x
    print('res = y + x:', res)

    res = x - y
    print('res = x - y:', res)
    res = y - x
    print('res = y - x:', res)

    res = x * y
    print('res = x * y:', res)
    res = y * x
    print('res = y * x:', res)

    res = x / y
    print('res = x / y:', res)
    res = y / x
    print('res = y / x:', res)
    print('</H1>')
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01a_MReal.py.

1.7.1.4 Examples in Python, `mcplx`

General test code for Python can be found here

```
import math
from xlcalcnet import mreal
from decimal import Decimal
from fractions import Fraction
```

(continues on next page)

(continued from previous page)

```
i = 232945639845394856394563936482734638475398457398457398457 3

def main_tests():
    general_assignments()
    functions_with_argument_conversion()
    arithmetic_operators_with_mreal()
```

General test code can be found here

```
def general_assignments():
    print()
    print('<H1 Title="General assignments and conversions">')

    x = mreal.t(i)
    print('x = mreal.t(i):', x)

    x = mreal.t(5.7)
    print('x = mrealT(5.7):', x)

    x = mreal.t(5.7)
    print('x = mrealT(5.7):', x)
    x0 = mreal.t(232945639845394856394563936482734 6)
    print('x0 = mrealT(232945639845394856394563936482734 6', x0)
    x1 = mreal.t("232945639845394856394563936482734 6")
    print('x1 = mreal.t("232945639845394856394563936482734 6"):', x1)
    x = mreal.t("5.5")
    print('x = mrealT("5.5"):', x)

    print()
    x = mreal.t(55)
    print('x = mreal.t(5):', x)
    y = mreal.exp(x)
    print('y = mreal.exp(x):', y)

    z = mreal.exp(5.5)
    print('z = mreal.exp(5.5):', z)
    z = mreal.exp(5)
    print('z = mreal.exp(5):', z)
    z = mreal.exp("5.5")
    print('z = mreal.exp("5.5"):', z)
    print('</H1>')
```

General test code can be found here

```
def functions_with_argument_conversion():
    print()
    print('<H1 Title="Functions with argument conversion">')
    dec = Decimal(1) / Decimal(7)
    print('dec = Decimal(1) / Decimal(7):', dec)
    z = mreal.exp(dec)
    print('z = mreal.exp(dec):', z)
    frac = Fraction("-3/7")
    print('frac = Fraction("-3/7:")', frac)
    z = mreal.exp(frac)
    print('z = mreal.exp(frac):', z)

    print()
    x = mreal.t(5.5)
    print('x = mreal.t(55):', x)
    y = mreal.t(3.3)
    print('y = mreal.t(33):', y)
    z = mreal.pow(x, y)
    print('z = mreal.pow(x, y):        ', z)
    z = mreal.pow(5.5, 3.3)
```

(continues on next page)

(continued from previous page)

```
    print('z = mreal.pow(5.5, 3.3):    ', z)
    z = mreal.pow("5.5", "3.3")
    print('z = mreal.pow("5.5", "3.3"):', z)
    z = mreal.pow(5, 3)
    print('z = mreal.pow(5, 3):', z)

    t = z + 3
    print('t = z + 3:', t)
    print('</H1>')
```

General test code can be found here

```
def arithmetic_operators_with_mreal():
    print()
    print('<H1 Title="Arithmetic operators with mreal">')

    x = mreal.t(5.0)
    y = mreal.t(2.5)
    print('x: ', x)
    print('y: ', y)

    res = x + y
    print('res = x + y:', res)
    res = y + x
    print('res = y + x:', res)

    res = x - y
    print('res = x - y:', res)
    res = y - x
    print('res = y - x:', res)

    res = x * y
    print('res = x * y:', res)
    res = y * x
    print('res = y * x:', res)

    res = x / y
    print('res = x / y:', res)
    res = y / x
    print('res = y / x:', res)
    print('</H1>')
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02b_TestMCplx.py.

1.7.1.5 Notes regarding the implementation in C# and C++

The C# source code for the module `mreal` can be found here: mreal.cs.

The C# source code for the module `mcplx` can be found here: mcplx.cs.

The C++ source code supporting scalars in general which is called from `mreal.cs` and `mcplx.cs` can be found here: UseMpfr.cpp.

The C++ source code which interacts directly with Boost can be found here: BoostMpfr.cpp.

The C++ source code supporting Eigen which is called from `mreal.cs` and `mcplx.cs` can be found here: UseAnyEigenMat.cpp.

The C++ source code which interacts directly with Eigen can be found in the folder: BoostEigenMath.cpp.

1.7.2 Binary arbitrary precision ball: `aflint` and `aflintc`

The C# modules `aflint` and `aflintc` provide support for real and complex ball arithmetic with an arbitrary precision significand and an arbitrary size exponent. The corresponding real and complex data types, `Arb` and `ArbC`, have been added as objects in XlCalcNet2 (and have therefore the overhead of objects). They are implemented in software, using the `arb_t` and and `acb_t` data types of the FLINT library (see https://flintlib.org/).

The C# modules `mreal` and `mcplx` partially support Eigen.

Note: Exponent soft maximum and minimum

1.7.2.1 Examples in C#, `aflint`

General test code for C# can be found here

```
#region Usings
using System;
using System.Numerics;
using FixedPrecNet;
#endregion


public static void MainTests()
{
    Console.WriteLine("Demo of some aflint functions");
    AflintTest0();
    AflintTest1();
}
```

General test code for C# can be found here

```
public static void AflintcTest0()
{
    Console.WriteLine("<H1 Title=" + "\"" + "AflintcTest0"  + "\"" + ">");

    var a = aflintc.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = aflintc.abs(a);
    Console.WriteLine("res1 = aflintc.abs(a): {0}", res1);

    var res2 = aflintc.exp(a);
    Console.WriteLine("res2 = aflintc.exp(a): {0}", res2);

    Console.WriteLine("</H1>");
}
```

General test code for C# can be found here

```
public static void AflintcTest1()
{
    Console.WriteLine("<H1 Title=" + "\"" + "AflintcTest1"  + "\"" + ">");

    var a = aflintc.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = aflintc.asin(a);
    Console.WriteLine("res1 = aflintc.asin(a) {0}", res1);

    var res2 = aflintc.sin(a);
    Console.WriteLine("res2 = aflintc.sin(a) {0}", res2);

    Console.WriteLine("</H1>");
}
```

The above and additional examples can be found online in the DataXlCalcNet repository or in the corresponding local DataXlCalcNet folder in the file D02a_Aflint.cs.

1.7.2.2 Examples in C#, aflintc

General test code for C# can be found here

```
#region Usings
using System;
using System.Numerics;
using FixedPrecNet;
#endregion


public static void MainTests()
{
    Console.WriteLine("Demo of some aflint functions");
    AflintTest0();
    AflintTest1();
}
```

General test code for C# can be found here

```
public static void AflintcTest0()
{
    Console.WriteLine("<H1 Title=" + "\"" + "AflintcTest0"  + "\"" + ">");

    var a = aflintc.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = aflintc.abs(a);
    Console.WriteLine("res1 = aflintc.abs(a): {0}", res1);

    var res2 = aflintc.exp(a);
    Console.WriteLine("res2 = aflintc.exp(a): {0}", res2);

    Console.WriteLine("</H1>");
}
```

General test code for C# can be found here

```
public static void AflintcTest1()
{
    Console.WriteLine("<H1 Title=" + "\"" + "AflintcTest1"  + "\"" + ">");

    var a = aflintc.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = aflintc.asin(a);
    Console.WriteLine("res1 = aflintc.asin(a) {0}", res1);

    var res2 = aflintc.sin(a);
    Console.WriteLine("res2 = aflintc.sin(a) {0}", res2);

    Console.WriteLine("</H1>");
}
```

The above and additional examples can be found online in the DataXlCalcNet repository or in the corresponding local DataXlCalcNet folder in the file D02b_Aflintc.cs.

1.7.2.3 Examples in Python, `aflint`

General test code for Python can be found here

```
import math
from xlcalcnet import aflint
from decimal import Decimal
from fractions import Fraction
i = 232945639845394856394563936482734638475398457398457 3


def main_tests():
    general_assignments()
    functions_with_argument_conversion()
    arithmetic_operators_with_aflint()
```

General test code can be found here

```
def general_assignments():
    print()
    print('<H1 Title="General assignments and conversions">')

    x = aflint.t(i)
    print('x = aflint.t(i):', x)

    x = aflint.t(5.7)
    print('x = aflintT(5.7):', x)

    x = aflint.t(5.7)
    print('x = aflintT(5.7):', x)
    x0 = aflint.t(232945639845394856394563936482734 6)
    print('x0 = aflintT(232945639845394856394563936482734 6', x0)
    x1 = aflint.t("232945639845394856394563936482734 6")
    print('x1 = aflint.t("232945639845394856394563936482734 6"):', x1)
    x = aflint.t("5.5")
    print('x = aflintT("5.5"):', x)

    print()
    x = aflint.t(55)
    print('x = aflint.t(5):', x)
    y = aflint.exp(x)
    print('y = aflint.exp(x):', y)

    z = aflint.exp(5.5)
    print('z = aflint.exp(5.5):', z)
    z = aflint.exp(5)
    print('z = aflint.exp(5):', z)
    z = aflint.exp("5.5")
    print('z = aflint.exp("5.5"):', z)
    print('</H1>')
```

General test code can be found here

```
def functions_with_argument_conversion():
    print()
    print('<H1 Title="Functions with argument conversion">')
    dec = Decimal(1) / Decimal(7)
    print('dec = Decimal(1) / Decimal(7):', dec)
    z = aflint.exp(dec)
    print('z = aflint.exp(dec):', z)
    frac = Fraction("-3/7")
    print('frac = Fraction("-3/7:")', frac)
    z = aflint.exp(frac)
    print('z = aflint.exp(frac):', z)

    print()
```

(continues on next page)

(continued from previous page)

```
    x = aflint.t(5.5)
    print('x = aflint.t(55):', x)
    y = aflint.t(3.3)
    print('y = aflint.t(33):', y)
    z = aflint.pow(x, y)
    print('z = aflint.pow(x, y):        ', z)
    z = aflint.pow(5.5, 3.3)
    print('z = aflint.pow(5.5, 3.3):    ', z)
    z = aflint.pow("5.5", "3.3")
    print('z = aflint.pow("5.5", "3.3"):', z)
    z = aflint.pow(5, 3)
    print('z = aflint.pow(5, 3):', z)

    t = z + 3
    print('t = z + 3:', t)
    print('</H1>')
```

General test code can be found here

```
def arithmetic_operators_with_aflint():
    print()
    print('<H1 Title="Arithmetic operators with aflint">')

    x = aflint.t(5.0)
    y = aflint.t(2.5)
    print('x: ', x)
    print('y: ', y)

    res = x + y
    print('res = x + y:', res)
    res = y + x
    print('res = y + x:', res)

    res = x - y
    print('res = x - y:', res)
    res = y - x
    print('res = y - x:', res)

    res = x * y
    print('res = x * y:', res)
    res = y * x
    print('res = y * x:', res)

    res = x / y
    print('res = x / y:', res)
    res = y / x
    print('res = y / x:', res)
    print('</H1>')
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02a_AFlint.py.

1.7.2.4 Examples in Python, `aflintc`

General test code for Python can be found here

```
import math
from xlcalcnet import aflint
from decimal import Decimal
from fractions import Fraction
i = 232945639845394856394563936482734638475398457398457 3


def main_tests():
```

(continues on next page)

(continued from previous page)

```
    general_assignments()
    functions_with_argument_conversion()
    arithmetic_operators_with_aflint()
```

General test code can be found here

```
def general_assignments():
    print()
    print('<H1 Title="General assignments and conversions">')

    x = aflint.t(i)
    print('x = aflint.t(i):', x)

    x = aflint.t(5.7)
    print('x = aflintT(5.7):', x)

    x = aflint.t(5.7)
    print('x = aflintT(5.7):', x)
    x0 = aflint.t(232945639845394856394563936482734 6)
    print('x0 = aflintT(232945639845394856394563936482734 6', x0)
    x1 = aflint.t("232945639845394856394563936482734 6")
    print('x1 = aflint.t("232945639845394856394563936482734 6"):', x1)
    x = aflint.t("5.5")
    print('x = aflintT("5.5"):', x)

    print()
    x = aflint.t(55)
    print('x = aflint.t(5):', x)
    y = aflint.exp(x)
    print('y = aflint.exp(x):', y)

    z = aflint.exp(5.5)
    print('z = aflint.exp(5.5):', z)
    z = aflint.exp(5)
    print('z = aflint.exp(5):', z)
    z = aflint.exp("5.5")
    print('z = aflint.exp("5.5"):', z)
    print('</H1>')
```

General test code can be found here

```
def functions_with_argument_conversion():
    print()
    print('<H1 Title="Functions with argument conversion">')
    dec = Decimal(1) / Decimal(7)
    print('dec = Decimal(1) / Decimal(7):', dec)
    z = aflint.exp(dec)
    print('z = aflint.exp(dec):', z)
    frac = Fraction("-3/7")
    print('frac = Fraction("-3/7:")', frac)
    z = aflint.exp(frac)
    print('z = aflint.exp(frac):', z)

    print()
    x = aflint.t(5.5)
    print('x = aflint.t(55):', x)
    y = aflint.t(3.3)
    print('y = aflint.t(33):', y)
    z = aflint.pow(x, y)
    print('z = aflint.pow(x, y):        ', z)
    z = aflint.pow(5.5, 3.3)
    print('z = aflint.pow(5.5, 3.3):    ', z)
    z = aflint.pow("5.5", "3.3")
    print('z = aflint.pow("5.5", "3.3"):', z)
    z = aflint.pow(5, 3)
```

(continues on next page)

(continued from previous page)

```
    print('z = aflint.pow(5, 3):', z)

    t = z + 3
    print('t = z + 3:', t)
    print('</H1>')
```

General test code can be found here

```
def arithmetic_operators_with_aflint():
    print()
    print('<H1 Title="Arithmetic operators with aflint">')

    x = aflint.t(5.0)
    y = aflint.t(2.5)
    print('x: ', x)
    print('y: ', y)

    res = x + y
    print('res = x + y:', res)
    res = y + x
    print('res = y + x:', res)

    res = x - y
    print('res = x - y:', res)
    res = y - x
    print('res = y - x:', res)

    res = x * y
    print('res = x * y:', res)
    res = y * x
    print('res = y * x:', res)

    res = x / y
    print('res = x / y:', res)
    res = y / x
    print('res = y / x:', res)
    print('</H1>')
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02b_AFlintc.py.

1.7.2.5 Notes regarding the implementation in C# and C++

The C# source code for the module `aflint` can be found here: aflint.cs.

The C# source code for the module `aflintc` can be found here: aflintc.cs.

The C++ source code supporting scalars in general which is called from `aflint.cs` and `aflintc.cs` can be found here: UseArb.cpp.

The C++ source code supporting Eigen which is called from `aflint.cs` and `aflintc.cs` can be found here: UseAnyEigenMat.cpp.

The C++ source code which interacts directly with Eigen can be found in the folder: BoostEigenMath.cpp.

1.7.3 Binary floating point, single precision: `sflint` and `sflintc`

The C# modules `sflint` and `sflintc` provide a rich set of elementary and special real and complex scalar functions for the `Single` and `Single` data types, with the actual calculations done using the `Arb` and `ArbC` data types, which allows control of the absolute and relative error of the result.

1.7.3.1 Examples in C#, sflint

General test code for C# can be found here

```
#region Usings
using System;
using System.Numerics;
using FixedPrecNet;
#endregion


public static void MainTests()
{
    Console.WriteLine("Demo of some sflint functions");
    SflintTest0();
    SflintTest1();
}
```

General test code for C# can be found here

```
public static void SflintcTest0()
{
    Console.WriteLine("<H1 Title=" + "\"" + "SflintcTest0"  + "\"" + ">");

    var a = qflintc.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = qflintc.abs(a);
    Console.WriteLine("res1 = qflintc.abs(a): {0}", res1);

    var res2 = qflintc.exp(a);
    Console.WriteLine("res2 = qflintc.exp(a): {0}", res2);

    Console.WriteLine("</H1>");
}
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03a_Sflint.cs.

1.7.3.2 Examples in C#, sflintc

General test code for C# can be found here

```
#region Usings
using System;
using System.Numerics;
using FixedPrecNet;
#endregion


public static void MainTests()
{
    Console.WriteLine("Demo of some sflint functions");
    SflintTest0();
    SflintTest1();
}
```

General test code for C# can be found here

```
public static void SflintcTest0()
{
    Console.WriteLine("<H1 Title=" + "\"" + "SflintcTest0"  + "\"" + ">");

    var a = qflintc.t(3.5, 6.3);
```

(continues on next page)

(continued from previous page)

```
    Console.WriteLine("a: {0}", a);

    var res1 = qflintc.abs(a);
    Console.WriteLine("res1 = qflintc.abs(a): {0}", res1);

    var res2 = qflintc.exp(a);
    Console.WriteLine("res2 = qflintc.exp(a): {0}", res2);

    Console.WriteLine("</H1>");
}
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03b_Sflintc.cs.

1.7.3.3 Examples in Python, `sflint`

General test code for Python can be found here

```
import math
from xlcalcnet import sflint
from decimal import Decimal
from fractions import Fraction
i = 232945639845394856394563936482734638475398457398457 3
```

```
def main_tests():
    general_assignments()
    functions_with_argument_conversion()
    arithmetic_operators_with_sflint()
```

General test code can be found here

```
def general_assignments():
    print()
    print('<H1 Title="General assignments and conversions">')

    x = sflint.t(i)
    print('x = sflint.t(i):', x)

    x = sflint.t(5.7)
    print('x = sflintT(5.7):', x)

    x = sflint.t(5.7)
    print('x = sflintT(5.7):', x)
    x0 = sflint.t(232945639845394856394563936482734 6)
    print('x0 = sflintT(232945639845394856394563936482734 6', x0)
    x1 = sflint.t("232945639845394856394563936482734 6")
    print('x1 = sflint.t("232945639845394856394563936482734 6"):', x1)
    x = sflint.t("5.5")
    print('x = sflintT("5.5"):', x)

    print()
    x = sflint.t(55)
    print('x = sflint.t(5):', x)
    y = sflint.exp(x)
    print('y = sflint.exp(x):', y)

    z = sflint.exp(5.5)
    print('z = sflint.exp(5.5):', z)
    z = sflint.exp(5)
    print('z = sflint.exp(5):', z)
    z = sflint.exp("5.5")
    print('z = sflint.exp("5.5"):', z)
    print('</H1>')
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03a_SFlint.py.

1.7.3.4 Examples in Python, `sflintc`

General test code for Python can be found here

```
import math
from xlcalcnet import sflint
from decimal import Decimal
from fractions import Fraction
i = 232945639845394856394563936482734638475398457398457 3

def main_tests():
    general_assignments()
    functions_with_argument_conversion()
    arithmetic_operators_with_sflint()
```

General test code can be found here

```
def general_assignments():
    print()
    print('<H1 Title="General assignments and conversions">')

    x = sflint.t(i)
    print('x = sflint.t(i):', x)

    x = sflint.t(5.7)
    print('x = sflintT(5.7):', x)

    x = sflint.t(5.7)
    print('x = sflintT(5.7):', x)
    x0 = sflint.t(23294563984539485639456393648273 46)
    print('x0 = sflintT(23294563984539485639456393648273 46', x0)
    x1 = sflint.t("23294563984539485639456393648273 46")
    print('x1 = sflint.t("23294563984539485639456393648273 46"):', x1)
    x = sflint.t("5.5")
    print('x = sflintT("5.5"):', x)

    print()
    x = sflint.t(55)
    print('x = sflint.t(5):', x)
    y = sflint.exp(x)
    print('y = sflint.exp(x):', y)

    z = sflint.exp(5.5)
    print('z = sflint.exp(5.5):', z)
    z = sflint.exp(5)
    print('z = sflint.exp(5):', z)
    z = sflint.exp("5.5")
    print('z = sflint.exp("5.5"):', z)
    print('</H1>')
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03b_SFlintc.py.

1.7.3.5 Notes regarding the implementation in C# and C++

The C# source code for the modules `sflint` and `sflintc` can be found here: srealcplxflint.cs.

The C++ source code which is called from `srealcplxflint.cs` can be found here: UseSReal.cpp.

1.7.4 Binary floating point, double precision: dflint and dflintc

The C# modules dflint and dflintc provide a rich set of elementary and special real and complex scalar functions for the Double and Complex data types, with the actual calculations done using the Arb and ArbC data types, which allows control of the absolute and relative error of the result.

1.7.4.1 Examples in C#, dflint

General test code for C# can be found here

```
#region Usings
using System;
using System.Numerics;
using FixedPrecNet;
#endregion


public static void MainTests()
{
    Console.WriteLine("Demo of some sflint functions");
    DflintTest0();
    DflintTest1();
}
```

General test code for C# can be found here

```
public static void DflintcTest0()
{
    Console.WriteLine("<H1 Title=" + "\"" + "DflintcTest0"  + "\"" + ">");

    var a = qflintc.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = qflintc.abs(a);
    Console.WriteLine("res1 = qflintc.abs(a): {0}", res1);

    var res2 = qflintc.exp(a);
    Console.WriteLine("res2 = qflintc.exp(a): {0}", res2);

    Console.WriteLine("</H1>");
}
```

The above and additional examples can be found online in the DataXlCalcNet repository or in the corresponding local DataXlCalcNet folder in the file D04a_Dflint.cs.

1.7.4.2 Examples in C#, dflintc

General test code for C# can be found here

```
#region Usings
using System;
using System.Numerics;
using FixedPrecNet;
#endregion


public static void MainTests()
{
    Console.WriteLine("Demo of some sflint functions");
    DflintTest0();
    DflintTest1();
}
```

General test code for C# can be found here

```
public static void DflintcTest0()
{
    Console.WriteLine("<H1 Title=" + "\"" + "DflintcTest0"  + "\"" + ">");

    var a = qflintc.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = qflintc.abs(a);
    Console.WriteLine("res1 = qflintc.abs(a): {0}", res1);

    var res2 = qflintc.exp(a);
    Console.WriteLine("res2 = qflintc.exp(a): {0}", res2);

    Console.WriteLine("</H1>");
}
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04b_Dflintc.cs.

1.7.4.3 Examples in Python, `dflint`

General test code for Python can be found here

```
import math
from xlcalcnet import sflint
from decimal import Decimal
from fractions import Fraction
i = 232945639845394856394563936482734638475398457398457 3984573


def main_tests():
    general_assignments()
    functions_with_argument_conversion()
    arithmetic_operators_with_sflint()
```

General test code can be found here

```
def general_assignments():
    print()
    print('<H1 Title="General assignments and conversions">')

    x = sflint.t(i)
    print('x = sflint.t(i):', x)

    x = sflint.t(5.7)
    print('x = sflintT(5.7):', x)

    x = sflint.t(5.7)
    print('x = sflintT(5.7):', x)
    x0 = sflint.t(23294563984539485639456393648273463847539845739845 73)
    print('x0 = sflintT(23294563984539485639456393648273463847539845739845 73', x0)
    x1 = sflint.t("23294563984539485639456393648273463847539845739845 73")
    print('x1 = sflint.t("23294563984539485639456393648273463847539845739845 73"):', x1)
    x = sflint.t("5.5")
    print('x = sflintT("5.5"):', x)

    print()
    x = sflint.t(55)
    print('x = sflint.t(5):', x)
    y = sflint.exp(x)
    print('y = sflint.exp(x):', y)

    z = sflint.exp(5.5)
    print('z = sflint.exp(5.5):', z)
    z = sflint.exp(5)
```

(continues on next page)

(continued from previous page)

```
    print('z = sflint.exp(5):', z)
    z = sflint.exp("5.5")
    print('z = sflint.exp("5.5"):', z)
    print('</H1>')
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04a_DFlint.py.

1.7.4.4 Examples in Python, `dflintc`

General test code for Python can be found here

```
import math
from xlcalcnet import sflint
from decimal import Decimal
from fractions import Fraction
i = 232945639845394856394563936482734638475398457398457 3
```

```
def main_tests():
    general_assignments()
    functions_with_argument_conversion()
    arithmetic_operators_with_sflint()
```

General test code can be found here

```
def general_assignments():
    print()
    print('<H1 Title="General assignments and conversions">')

    x = sflint.t(i)
    print('x = sflint.t(i):', x)

    x = sflint.t(5.7)
    print('x = sflintT(5.7):', x)

    x = sflint.t(5.7)
    print('x = sflintT(5.7):', x)
    x0 = sflint.t(23294563984539485639456393648273463847539845739845 73)
    print('x0 = sflintT(23294563984539485639456393648273463847539845739845 73', x0)
    x1 = sflint.t("23294563984539485639456393648273463847539845739845 73")
    print('x1 = sflint.t("23294563984539485639456393648273463847539845739845 73"):', x1)
    x = sflint.t("5.5")
    print('x = sflintT("5.5"):', x)

    print()
    x = sflint.t(55)
    print('x = sflint.t(5):', x)
    y = sflint.exp(x)
    print('y = sflint.exp(x):', y)

    z = sflint.exp(5.5)
    print('z = sflint.exp(5.5):', z)
    z = sflint.exp(5)
    print('z = sflint.exp(5):', z)
    z = sflint.exp("5.5")
    print('z = sflint.exp("5.5"):', z)
    print('</H1>')
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04b_DFlintc.py.

1.7.4.5 Notes regarding the implementation in C# and C++

The C# source code for the modules `dflint` and `dflintc` can be found here: drealcplxflint.cs.

The C++ source code which is called from `drealcplxflint.cs` can be found here: UseFReal.cpp.

1.7.5 Binary floating point, extended precision: `eflint` and `eflintc`

The C# modules `eflint` and `eflintc` provide a rich set of elementary and special real and complex scalar functions for the `Extended` and `ExtendedC` data types, with the actual calculations done using the `Arb` and `ArbC` data types, which allows control of the absolute and relative error of the result.

1.7.5.1 Examples in C#, `eflint`

General test code for C# can be found here

```
#region Usings
using System;
using System.Numerics;
using FixedPrecNet;
#endregion


public static void MainTests()
{
    Console.WriteLine("Demo of some eflint functions");
    EflintTest0();
    EflintTest1();
}
```

General test code for C# can be found here

```
public static void EflintcTest0()
{
    Console.WriteLine("<H1 Title=" + "\"" + "EflintcTest0"  + "\"" + ">");

    var a = eflintc.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = eflintc.abs(a);
    Console.WriteLine("res1 = eflintc.abs(a): {0}", res1);

    var res2 = eflintc.exp(a);
    Console.WriteLine("res2 = eflintc.exp(a): {0}", res2);

    Console.WriteLine("</H1>");
}
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05a_Eflint.cs.

1.7.5.2 Examples in C#, `eflintc`

General test code for C# can be found here

```
#region Usings
using System;
using System.Numerics;
using FixedPrecNet;
#endregion


public static void MainTests()
{
    Console.WriteLine("Demo of some eflint functions");
    EflintTest0();
    EflintTest1();
}
```

General test code for C# can be found here

```
public static void EflintcTest0()
{
    Console.WriteLine("<H1 Title=" + "\"" + "EflintcTest0"  + "\"" + ">");

    var a = eflintc.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = eflintc.abs(a);
    Console.WriteLine("res1 = eflintc.abs(a): {0}", res1);

    var res2 = eflintc.exp(a);
    Console.WriteLine("res2 = eflintc.exp(a): {0}", res2);

    Console.WriteLine("</H1>");
}
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05b_Eflintc.cs.

1.7.5.3 Examples in Python, `eflint`

General test code for Python can be found here

```
import math
from xlcalcnet import eflint
from decimal import Decimal
from fractions import Fraction
i = 232945639845394856394563936482734638475398457398457 3984573


def main_tests():
    general_assignments()
    functions_with_argument_conversion()
    arithmetic_operators_with_eflint()
```

General test code can be found here

```
def general_assignments():
    print()
    print('<H1 Title="General assignments and conversions">')

    x = eflint.t(i)
    print('x = eflint.t(i):', x)

    x = eflint.t(5.7)
    print('x = eflintT(5.7):', x)

    x = eflint.t(5.7)
    print('x = eflintT(5.7):', x)
    x0 = eflint.t(23294563984539485639456393648273463847539845739845 7346)
    print('x0 = eflintT(23294563984539485639456393648273463847539845739845 7346', x0)
    x1 = eflint.t("23294563984539485639456393648273463847539845739845 7346")
    print('x1 = eflint.t("23294563984539485639456393648273463847539845739845 7346"):', x1)
    x = eflint.t("5.5")
    print('x = eflintT("5.5"):', x)

    print()
    x = eflint.t(55)
    print('x = eflint.t(5):', x)
    y = eflint.exp(x)
    print('y = eflint.exp(x):', y)

    z = eflint.exp(5.5)
    print('z = eflint.exp(5.5):', z)
    z = eflint.exp(5)
```

(continues on next page)

(continued from previous page)

```
    print('z = eflint.exp(5):', z)
    z = eflint.exp("5.5")
    print('z = eflint.exp("5.5"):', z)
    print('</H1>')
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05a_EFlint.py.

1.7.5.4 Examples in Python, `eflintc`

General test code for Python can be found here

```
import math
from xlcalcnet import eflint
from decimal import Decimal
from fractions import Fraction
i = 232945639845394856394563936482734638475398457398457 3
```

```
def main_tests():
    general_assignments()
    functions_with_argument_conversion()
    arithmetic_operators_with_eflint()
```

General test code can be found here

```
def general_assignments():
    print()
    print('<H1 Title="General assignments and conversions">')

    x = eflint.t(i)
    print('x = eflint.t(i):', x)

    x = eflint.t(5.7)
    print('x = eflintT(5.7):', x)

    x = eflint.t(5.7)
    print('x = eflintT(5.7):', x)
    x0 = eflint.t(232945639845394856394563936482734 6)
    print('x0 = eflintT(232945639845394856394563936482734 6', x0)
    x1 = eflint.t("232945639845394856394563936482734 6")
    print('x1 = eflint.t("232945639845394856394563936482734 6"):', x1)
    x = eflint.t("5.5")
    print('x = eflintT("5.5"):', x)

    print()
    x = eflint.t(55)
    print('x = eflint.t(5):', x)
    y = eflint.exp(x)
    print('y = eflint.exp(x):', y)

    z = eflint.exp(5.5)
    print('z = eflint.exp(5.5):', z)
    z = eflint.exp(5)
    print('z = eflint.exp(5):', z)
    z = eflint.exp("5.5")
    print('z = eflint.exp("5.5"):', z)
    print('</H1>')
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05b_EFlintc.py.

1.7.5.5 Notes regarding the implementation in C# and C++

The C# source code for the modules `eflint` and `eflintc` can be found here: erealcplxflint.cs.

The C++ source code which is called from `erealcplxflint.cs` can be found here: UseXReal.cpp.

1.7.6 Binary floating point, quadruple precision: `qflint` and `qflintc`

The C# modules `qflint` and `qflintc` provide a rich set of elementary and special real and complex scalar functions for the `Quadruple` and `QuadrupleC` data types, with the actual calculations done using the `Arb` and `ArbC` data types, which allows control of the absolute and relative error of the result.

1.7.6.1 Examples in C#, `qflint`

General test code for C# can be found here

```
#region Usings
using System;
using System.Numerics;
using FixedPrecNet;
#endregion


public static void MainTests()
{
    Console.WriteLine("Demo of some qflint functions");
    SflintTest0();
    SflintTest1();
}
```

General test code for C# can be found here

```
public static void QflintcTest0()
{
    Console.WriteLine("<H1 Title=" + "\"" + "QflintcTest0"  + "\"" + ">");

    var a = qflintc.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = qflintc.abs(a);
    Console.WriteLine("res1 = qflintc.abs(a): {0}", res1);

    var res2 = qflintc.exp(a);
    Console.WriteLine("res2 = qflintc.exp(a): {0}", res2);

    Console.WriteLine("</H1>");
}
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06a_Qflint.cs.

1.7.6.2 Examples in C#, `qflintc`

General test code for C# can be found here

```
#region Usings
using System;
using System.Numerics;
using FixedPrecNet;
#endregion


public static void MainTests()
{
    Console.WriteLine("Demo of some qflint functions");
    SflintTest0();
    SflintTest1();
}
```

General test code for C# can be found here

```
public static void QflintcTest0()
{
    Console.WriteLine("<H1 Title=" + "\"" + "QflintcTest0"  + "\"" + ">");

    var a = qflintc.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = qflintc.abs(a);
    Console.WriteLine("res1 = qflintc.abs(a): {0}", res1);

    var res2 = qflintc.exp(a);
    Console.WriteLine("res2 = qflintc.exp(a): {0}", res2);

    Console.WriteLine("</H1>");
}
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06b_Qflintc.cs.

1.7.6.3 Examples in Python, `qflint`

General test code for Python can be found here

```
import math
from xlcalcnet import qflint
from decimal import Decimal
from fractions import Fraction
i = 232945639845394856394563936482734638475398457398457 3984573


def main_tests():
    general_assignments()
    functions_with_argument_conversion()
    arithmetic_operators_with_qflint()
```

General test code can be found here

```
def general_assignments():
    print()
    print('<H1 Title="General assignments and conversions">')

    x = qflint.t(i)
    print('x = qflint.t(i):', x)

    x = qflint.t(5.7)
    print('x = qflintT(5.7):', x)

    x = qflint.t(5.7)
    print('x = qflintT(5.7):', x)
    x0 = qflint.t(23294563984539485639456393648273463847539845739845 73984573)
    print('x0 = qflintT(23294563984539485639456393648273463847539845739845 73984573', x0)
    x1 = qflint.t("23294563984539485639456393648273463847539845739845 73984573")
    print('x1 = qflint.t("23294563984539485639456393648273463847539845739845 73984573"):', x1)
    x = qflint.t("5.5")
    print('x = qflintT("5.5"):', x)

    print()
    x = qflint.t(55)
    print('x = qflint.t(5):', x)
    y = qflint.exp(x)
    print('y = qflint.exp(x):', y)

    z = qflint.exp(5.5)
    print('z = qflint.exp(5.5):', z)
    z = qflint.exp(5)
```

(continues on next page)

(continued from previous page)

```
    print('z = qflint.exp(5):', z)
    z = qflint.exp("5.5")
    print('z = qflint.exp("5.5"):', z)
    print('</H1>')
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06a_QFlint.py.

1.7.6.4 Examples in Python, `qflintc`

General test code for Python can be found here

```
import math
from xlcalcnet import qflint
from decimal import Decimal
from fractions import Fraction
i = 232945639845394856394563936482734638475398457398457 3
```

```
def main_tests():
    general_assignments()
    functions_with_argument_conversion()
    arithmetic_operators_with_qflint()
```

General test code can be found here

```
def general_assignments():
    print()
    print('<H1 Title="General assignments and conversions">')

    x = qflint.t(i)
    print('x = qflint.t(i):', x)

    x = qflint.t(5.7)
    print('x = qflintT(5.7):', x)

    x = qflint.t(5.7)
    print('x = qflintT(5.7):', x)
    x0 = qflint.t(232945639845394856394563936482734 6)
    print('x0 = qflintT(232945639845394856394563936482734 6', x0)
    x1 = qflint.t("232945639845394856394563936482734 6")
    print('x1 = qflint.t("232945639845394856394563936482734 6"):', x1)
    x = qflint.t("5.5")
    print('x = qflintT("5.5"):', x)

    print()
    x = qflint.t(55)
    print('x = qflint.t(5):', x)
    y = qflint.exp(x)
    print('y = qflint.exp(x):', y)

    z = qflint.exp(5.5)
    print('z = qflint.exp(5.5):', z)
    z = qflint.exp(5)
    print('z = qflint.exp(5):', z)
    z = qflint.exp("5.5")
    print('z = qflint.exp("5.5"):', z)
    print('</H1>')
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06b_QFlintc.py.

1.7.6.5 Notes regarding the implementation in C# and C++

The C# source code for the modules `qflint` and `qflintc` can be found here: qrealcplxflint.cs.

The C++ source code which is called from `qrealcplxflint.cs` can be found here: UseQReal.cpp.

1.7.7 Binary floating point, octuple precision: `oflint` and `oflintc`

The C# modules `oflint` and `oflintc` provide a rich set of elementary and special real and complex scalar functions for the `Octuple` and `OctupleC` data types, with the actual calculations done using the `Arb` and `ArbC` data types, which allows control of the absolute and relative error of the result.

1.7.7.1 Examples in C#, `oflint`

General test code for C# can be found here

```
#region Usings
using System;
using System.Numerics;
using FixedPrecNet;
#endregion


public static void MainTests()
{
    Console.WriteLine("Demo of some oflint functions");
    OflintTest0();
    OflintTest1();
}
```

General test code for C# can be found here

```
public static void OflintcTest0()
{
    Console.WriteLine("<H1 Title=" + "\"" + "OflintcTest0"  + "\"" + ">");

    var a = qflintc.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = qflintc.abs(a);
    Console.WriteLine("res1 = qflintc.abs(a): {0}", res1);

    var res2 = qflintc.exp(a);
    Console.WriteLine("res2 = qflintc.exp(a): {0}", res2);

    Console.WriteLine("</H1>");
}
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07a_Oflint.cs.

1.7.7.2 Examples in C#, `oflintc`

General test code for C# can be found here

```
#region Usings
using System;
using System.Numerics;
using FixedPrecNet;
#endregion


public static void MainTests()
{
    Console.WriteLine("Demo of some oflint functions");
    OflintTest0();
    OflintTest1();
}
```

General test code for C# can be found here

```
public static void OflintcTest0()
{
    Console.WriteLine("<H1 Title=" + "\"" + "OflintcTest0"  + "\"" + ">");

    var a = qflintc.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = qflintc.abs(a);
    Console.WriteLine("res1 = qflintc.abs(a): {0}", res1);

    var res2 = qflintc.exp(a);
    Console.WriteLine("res2 = qflintc.exp(a): {0}", res2);

    Console.WriteLine("</H1>");
}
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07b_Oflintc.cs.

1.7.7.3 Examples in Python, `oflint`

General test code for Python can be found here

```
import math
from xlcalcnet import oflint
from decimal import Decimal
from fractions import Fraction
i = 232945639845394856394563936482734638475398457398457 3984573


def main_tests():
    general_assignments()
    functions_with_argument_conversion()
    arithmetic_operators_with_oflint()
```

General test code can be found here

```
def general_assignments():
    print()
    print('<H1 Title="General assignments and conversions">')

    x = oflint.t(i)
    print('x = oflint.t(i):', x)

    x = oflint.t(5.7)
    print('x = oflintT(5.7):', x)

    x = oflint.t(5.7)
    print('x = oflintT(5.7):', x)
    x0 = oflint.t(23294563984539485639456393648273463847539845739845 73)
    print('x0 = oflintT(23294563984539485639456393648273463847539845739845 73', x0)
    x1 = oflint.t("23294563984539485639456393648273463847539845739845 73")
    print('x1 = oflint.t("23294563984539485639456393648273463847539845739845 73"):', x1)
    x = oflint.t("5.5")
    print('x = oflintT("5.5"):', x)

    print()
    x = oflint.t(55)
    print('x = oflint.t(5):', x)
    y = oflint.exp(x)
    print('y = oflint.exp(x):', y)

    z = oflint.exp(5.5)
    print('z = oflint.exp(5.5):', z)
    z = oflint.exp(5)
```

(continues on next page)

(continued from previous page)

```
    print('z = oflint.exp(5):', z)
    z = oflint.exp("5.5")
    print('z = oflint.exp("5.5"):', z)
    print('</H1>')
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07a_OFlint.py.

1.7.7.4 Examples in Python, `oflintc`

General test code for Python can be found here

```
import math
from xlcalcnet import oflint
from decimal import Decimal
from fractions import Fraction
i = 232945639845394856394563936482734638475398457398457 3
```

```
def main_tests():
    general_assignments()
    functions_with_argument_conversion()
    arithmetic_operators_with_oflint()
```

General test code can be found here

```
def general_assignments():
    print()
    print('<H1 Title="General assignments and conversions">')

    x = oflint.t(i)
    print('x = oflint.t(i):', x)

    x = oflint.t(5.7)
    print('x = oflintT(5.7):', x)

    x = oflint.t(5.7)
    print('x = oflintT(5.7):', x)
    x0 = oflint.t(23294563984539485639456393648273)
    print('x0 = oflintT(23294563984539485639456393648273', x0)
    x1 = oflint.t("23294563984539485639456393648273")
    print('x1 = oflint.t("23294563984539485639456393648273"):', x1)
    x = oflint.t("5.5")
    print('x = oflintT("5.5"):', x)

    print()
    x = oflint.t(55)
    print('x = oflint.t(5):', x)
    y = oflint.exp(x)
    print('y = oflint.exp(x):', y)

    z = oflint.exp(5.5)
    print('z = oflint.exp(5.5):', z)
    z = oflint.exp(5)
    print('z = oflint.exp(5):', z)
    z = oflint.exp("5.5")
    print('z = oflint.exp("5.5"):', z)
    print('</H1>')
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07b_OFlintc.py.

1.7.7.5 Notes regarding the implementation in C# and C++

The C# source code for the modules `oflint` and `oflintc` can be found here: orealcplxflint.cs.

The C++ source code which is called from `orealcplxflint.cs` can be found here: UseOReal.cpp.

1.7.8 Binary floating point, multiple precision: mflint, mflintc

The C# modules mflint and mflintc provide a rich set of elementary and special real and complex scalar functions for the Octuple and OctupleC data types, with the actual calculations done using the Arb and ArbC data types, which allows control of the absolute and relative error of the result.

1.7.8.1 Examples in C#, mflint

General test code for C# can be found here

```
#region Usings
using System;
using System.Numerics;
using FixedPrecNet;
#endregion


public static void MainTests()
{
    Console.WriteLine("Demo of some mflint functions");
    MflintTest0();
    MflintTest1();
}
```

General test code for C# can be found here

```
public static void MflintcTest0()
{
    Console.WriteLine("<H1 Title=" + "\"" + "MflintcTest0"  + "\"" + ">");

    var a = qflintc.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = qflintc.abs(a);
    Console.WriteLine("res1 = qflintc.abs(a): {0}", res1);

    var res2 = qflintc.exp(a);
    Console.WriteLine("res2 = qflintc.exp(a): {0}", res2);

    Console.WriteLine("</H1>");
}
```

The above and additional examples can be found online in the DataXlCalcNet repository or in the corresponding local DataXlCalcNet folder in the file D08a_Mflint.cs.

1.7.8.2 Examples in C#, mflintc

General test code for C# can be found here

```
#region Usings
using System;
using System.Numerics;
using FixedPrecNet;
#endregion


public static void MainTests()
{
    Console.WriteLine("Demo of some mflint functions");
    MflintTest0();
    MflintTest1();
}
```

General test code for C# can be found here

```
public static void MflintcTest0()
{
    Console.WriteLine("<H1 Title=" + "\"" + "MflintcTest0"  + "\"" + ">");

    var a = qflintc.t(3.5, 6.3);
    Console.WriteLine("a: {0}", a);

    var res1 = qflintc.abs(a);
    Console.WriteLine("res1 = qflintc.abs(a): {0}", res1);

    var res2 = qflintc.exp(a);
    Console.WriteLine("res2 = qflintc.exp(a): {0}", res2);

    Console.WriteLine("</H1>");
}
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D08b_Mflintc.cs.

1.7.8.3 Examples in Python, `mflint`

General test code for Python can be found here

```
import math
from xlcalcnet import mflint
from decimal import Decimal
from fractions import Fraction
i = 232945639845394856394563936482734638475398457398457 3984573


def main_tests():
    general_assignments()
    functions_with_argument_conversion()
    arithmetic_operators_with_mflint()
```

General test code can be found here

```
def general_assignments():
    print()
    print('<H1 Title="General assignments and conversions">')

    x = mflint.t(i)
    print('x = mflint.t(i):', x)

    x = mflint.t(5.7)
    print('x = mflintT(5.7):', x)

    x = mflint.t(5.7)
    print('x = mflintT(5.7):', x)
    x0 = mflint.t(23294563984539485639456393648273463847539845739845 7346)
    print('x0 = mflintT(23294563984539485639456393648273463847539845739845 7346', x0)
    x1 = mflint.t("23294563984539485639456393648273463847539845739845 7346")
    print('x1 = mflint.t("23294563984539485639456393648273463847539845739845 7346"):', x1)
    x = mflint.t("5.5")
    print('x = mflintT("5.5"):', x)

    print()
    x = mflint.t(55)
    print('x = mflint.t(5):', x)
    y = mflint.exp(x)
    print('y = mflint.exp(x):', y)

    z = mflint.exp(5.5)
    print('z = mflint.exp(5.5):', z)
    z = mflint.exp(5)
```

(continues on next page)

(continued from previous page)

```
    print('z = mflint.exp(5):', z)
    z = mflint.exp("5.5")
    print('z = mflint.exp("5.5"):', z)
    print('</H1>')
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D08a_MFlint.py.

1.7.8.4 Examples in Python, `mflintc`

General test code for Python can be found here

```
import math
from xlcalcnet import mflint
from decimal import Decimal
from fractions import Fraction
i = 232945639845394856394563936482734638475398457398457 3
```

```
def main_tests():
    general_assignments()
    functions_with_argument_conversion()
    arithmetic_operators_with_mflint()
```

General test code can be found here

```
def general_assignments():
    print()
    print('<H1 Title="General assignments and conversions">')

    x = mflint.t(i)
    print('x = mflint.t(i):', x)

    x = mflint.t(5.7)
    print('x = mflintT(5.7):', x)

    x = mflint.t(5.7)
    print('x = mflintT(5.7):', x)
    x0 = mflint.t(23294563984539485639456393648273)
    print('x0 = mflintT(23294563984539485639456393648273', x0)
    x1 = mflint.t("23294563984539485639456393648273")
    print('x1 = mflint.t("23294563984539485639456393648273"):', x1)
    x = mflint.t("5.5")
    print('x = mflintT("5.5"):', x)

    print()
    x = mflint.t(55)
    print('x = mflint.t(5):', x)
    y = mflint.exp(x)
    print('y = mflint.exp(x):', y)

    z = mflint.exp(5.5)
    print('z = mflint.exp(5.5):', z)
    z = mflint.exp(5)
    print('z = mflint.exp(5):', z)
    z = mflint.exp("5.5")
    print('z = mflint.exp("5.5"):', z)
    print('</H1>')
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D08b_MFlintc.py.

1.7.8.5 Notes regarding the implementation in C# and C++

The C# source code for the modules `mflint` and `mflintc` can be found here: mrealcplxflint.cs.

The C++ source code which is called from `mrealcplxflint.cs` can be found here: UseMpfr.cpp.

1.7.9 Building the underlying C# and C/C++ libraries

The XlCalcNet2 library, which is licensed under the LGPL-3.0 and is therefore provided in a separate repository, is based on Boost Math, Boost Multiprecision, Boost Odeint, Eigen, GMP, MPFR, MPC and FLINT and provides functions for the same data types as XlCalcNet and also in arbitrary precision, which are available to the user both from C# and Python.

The SourceOfBasicLibraries2 repository provides copies of the source code of the underlying numerical libraries, which are required (in addition to Eigen and Boost, see SourceOfBasicLibraries) to build the XlCalcNet2 library.. These copies also include small patches and .sh files, as required. They are provided to make it easier to reproduce the compilation results, as distributed as part of the XlCalcNet2 repository.

1.7.9.1 GMP (version 6.3.0)

Text descibing GMP, including config files

1.7.9.2 MPFR (version 4.2.2)

Text descibing MPFR, including config files

1.7.9.3 MPC (version 1.3.1)

Text descibing MPC, including config files

1.7.9.4 FLINT (version 3.4.0)

Text descibing FLINT, including config files

1.7.9.5 ArbPreNet (version 1.0.0)

Text descibing ArbPreNet

1.8 Building user libraries and documenting them

XlCalcNet allows the user to build libraries of user defined functions in Python and C#, which can be used from spreadsheet formulas in Microsoft Excel and LibreOffice Calc, as well as from Python scripts and C# programs. The user libraries can be documented using Sphinx, which allows to build documentation in html and pdf format.

Basic examples of building a user library are provided for Python in the subfolders of the `A03_UserlibPython` folder, and for C# in the subfolders of the `A04_UserlibCSharp` folder, which can be used as templates for building more complex user libraries.

The user library can be documented using Sphinx, which allows to build documentation in html and pdf format. The documentation can be built starting with examples in the `A05_UserlibDocs` folder, which can be used as a template for documenting more complex user libraries. The documentation for the already included starting user libraray is part of this manual. It is written in the same style as this manual and comprises two parts: User library: numerical; and User library: graphics.

Examples of using the user libraries are provided in the subfolders of the `A06_UserlibExamplesPython` folder for Python and in the `A07_UserlibExamplesCSharp` folder for C#.

1.8.1 Building a library of user defined Python functions

In Python, the user library is built in the subfolders of the `A03_UserlibPython` folder, which contains Python modules with the user defined functions. The modules can be imported in Python scripts and used from spreadsheet formulas in Microsoft Excel and LibreOffice Calc. The functions are decribed here.

These functions can be tested in the subfolders of the `A06_UserlibExamplesPython` folder.

1.8.2 Building a library of user defined functions in C#

The library of user defined functions in C# is built in form of 2 dynamic link libraries (DLLs), which are called `UserFixedPrecNet.dll` and `UserArbPrecNet.dll` and which are written into the Binary Output Folder. These functions are described here.

There is also a third DLL called `UserMpPrecNet.dll`, which is used by the Python user library. This DLL is also written into the Binary Output Folder.

1.8.3 Sphinx: building documentation for software with Python (html and pdf)

This manual is written in reStructuredText (reST) format, which is a lightweight markup language. The manual is built using Sphinx, which is a tool that makes it easy to create intelligent and beautiful documentation for Python projects (or other software projects). Sphinx uses reStructuredText as its markup language and can generate output in various formats, including HTML and PDF.

To build the documentation, you need to have Sphinx installed.

See also: https://www.sphinx-doc.org/en/master/

You also need to install 3 additional Sphinx extensions that are used in this manual: the Sphinx Book Theme, the Sphinx Copybutton extension, and the Sphinx Contrib Bibtex extension

Assuming that the Python batch files have been installed as described *here*, these four packages can be installed by double-clicking on the batch files `A14installSphinx.bat`, `A15install_sphinx_book_theme.bat`, `A16install_sphinx_copybutton.bat`, `A17install_sphinxcontribute_bibtex.bat`, in the `C:\Python313` folder.

With these packages installed, you can build the documentation of the user library by opening in the Tiny IDE the file `A05_UserlibDocs\B01_Lib01\_static\builddoc.py`. In the Tiny IDE main menu, click on `Run`. The HTML documentation will then be built in the subfolder `html` in the `XlCalcNetIDE` folder in the AppDataLocal folder. If built has succeded, the documentation will be opened automatically. The html documentation can be viewed by opening the file `index.html` in a web browser.

CHAPTER

TWO

BASIC FLOATING POINT FUNCTIONS

The source code for the C# tests in Visual Studio can be found online in the `XlCalcNet` repository or in the corresponding local `XlCalcNet` folder in the file B02_BasicFloatingPoint.cs.

2.1 General real functions

2.1.1 Fused multiplication and addition: $\mathrm{fma}(x, y, z)$

`ctx.`**`fma`**(x, y, z)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

If successful, returns the value of x * y + z as if calculated to infinite precision and rounded once to fit the result type (or, alternatively, calculated as a single ternary floating-point operation).

See also: https://en.cppreference.com/w/cpp/numeric/math/fma

An example in Python

```
>>> from xlcalcnet import *
>>> x = 5.1; y = 2.7;  z = 3.5; gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.fma(x, y, z)))
    fpm:  17.27
    mpm:  17.27
    dpm:  17.27
    ipm: [17.269999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999998272,
          17.270000000000000000000000000000000000000000000000000000000000000000000000000000000000000000002199]
    gpm:  17.269999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999998
    apm: [17.270000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000 +/- 5.66e-90]
 math53:  17.27
  sreal:  17.27
  dreal:  17.27
  ereal:  17.27
  qreal:  17.27
  oreal:  17.27
  mreal:  17.27
 sflint:  17.27
 dflint:  17.27
 eflint:  17.27
 qflint:  17.27
 oflint:  17.27
 mflint:  17.27
 aflint: [17.270000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000 +/- 2.56e-89]
```

2.1.2 Maximum of two floating point numbers: $\mathrm{fmax}(x, y)$

`ctx.`**`fmax`**(x, e)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns the maximum of two floating point numbers; $x, y \neq$ NAN.

Returns the larger of two floating point arguments, treating NaNs as missing data (between a NaN and a numeric value, the numeric value is chosen). Only if both arguments are NaN, NaN is returned.

This function is not required to be sensitive to the sign of zero, although some implementations additionally enforce that if one argument is +0 and the other is -0, then +0 is returned.

See also: https://en.cppreference.com/w/cpp/numeric/math/fmax

An example in Python

```
>>> from xlcalcnet import *
>>> x = 5.1; y = 2.7; gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.fmax(x, y)))
    fpm:  5.1
    mpm:  5.1
    dpm:  5.1
    ipm: [5.09999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999992145,
          5.10000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000001964]
    gpm:  5.10000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000002
    apm: [5.10000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000 +/- 1.77e-90]
 math53:  5.1
  sreal:  5.1
  dreal:  5.1
  ereal:  5.0999999999999999999
  qreal:  5.1
  oreal:  5.1
  mreal:  5.1
 sflint:  5.1
 dflint:  5.1
 eflint:  5.0999999999999999999
 qflint:  5.1
 oflint:  5.1
 mflint:  5.1
 aflint: [5.10000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000 +/- 1.58e-90]
```

2.1.3 Minimum of two floating point numbers: $\mathrm{fmin}(x, y)$

`ctx.`**`fmin`**(x, y)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns the minimum of two floating point numbers; $x, y \neq$ NAN.

Returns the smaller of two floating point arguments, treating NaNs as missing data (between a NaN and a numeric value, the numeric value is chosen). Only if both arguments are NaN, NaN is returned.

This function is not required to be sensitive to the sign of zero, although some implementations additionally enforce that if one argument is +0 and the other is -0, then -0 is returned.

See also: https://en.cppreference.com/w/cpp/numeric/math/fmin

An example in Python

```
>>> from xlcalcnet import *
>>> x = 5.1; y = 2.7; gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.fmin(x, y)))
    fpm:  2.7
    mpm:  2.7
```

(continues on next page)

(continued from previous page)

```
   dpm:  2.7
   ipm: [2.69999999999
```

2.2 Machine constants, general

2.2.1 Zero, positive zero

property `ctx.zero`

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns $+0$.

An example in Python

```
>>> from xlcalcnet import *
>>> gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.zero))
    fpm:  0
    mpm:  0.0
    dpm:  0
    ipm: [0.0,
          0.0]
    gpm:  0.0
    apm: 0
 math53:  0
  sreal:  0
  dreal:  0
  ereal:  0
  qreal:  0
  oreal:  0
  mreal:  0
 sflint:  0
 dflint:  0
 eflint:  0
 qflint:  0
 oflint:  0
 mflint:  0
 aflint:  0
```

2.2.2 Negative zero

property `ctx.negzero`

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns -0.

An example in Python

```
>>> from xlcalcnet import *
>>> gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.negzero))
    fpm:  -0
    mpm:  0.0
    dpm:  0
    ipm: [0.0,
          0.0]
    gpm:  -0.0
    apm: 0
 math53:  0
  sreal:  0
  dreal:  0
  ereal:  0
  qreal:  0
  oreal:  0
  mreal:  -0
 sflint:  0
```

(continues on next page)

(continued from previous page)

```
 dflint:  0
 eflint:  0
 qflint:  0
 oflint:  0
 mflint:  -0
 aflint:  0
```

2.2.3 One

property Cxt.**one**

where ctx is math53, ctxboost or ctxflint.

Returns 1

An example in Python

```
>>> from xlcalcnet import *
>>> gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.one))
    fpm:  1
    mpm:  1.0
    dpm:  1
    ipm: [1.0,
          1.0]
    gpm:  1.0
    apm: 1.000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000
 math53:  1
  sreal:  1
  dreal:  1
  ereal:  1
  qreal:  1
  oreal:  1
  mreal:  1
 sflint:  1
 dflint:  1
 eflint:  1
 qflint:  1
 oflint:  1
 mflint:  1
 aflint:  1.000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000
```

2.2.4 Positive infinity

ctx.**inf**()

where ctx is math53, ctxboost or ctxflint.

Returns $+\infty$

An example in Python

```
>>> from xlcalcnet import *
>>> gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.inf))
    fpm:  INF
    mpm:  inf
    dpm:  Infinity
    ipm: [inf,
          inf]
    gpm:  inf
    apm: [+/- inf]
 math53:  ∞
  sreal:  ∞
```

(continues on next page)

(continued from previous page)

```
 dreal:  ∞
 ereal:  inf
 qreal:  inf
 oreal:  inf
 mreal:  INF
sflint:  ∞
dflint:  ∞
eflint:  inf
qflint:  inf
oflint:  inf
mflint:  INF
aflint:  inf
```

2.2.5 Negative infinity

`ctx.neginf()`

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns the representation of $-\infty$

An example in Python

```
>>> from xlcalcnet import *
>>> gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.neginf))
    fpm:  -INF
    mpm:  -inf
    dpm:  -Infinity
    ipm: [-inf,
          -inf]
    gpm:  -inf
    apm: [+/- inf]
 math53:  -∞
  sreal:  -∞
  dreal:  -∞
  ereal:  -inf
  qreal:  -inf
  oreal:  -inf
  mreal:  -INF
 sflint:  -∞
 dflint:  -∞
 eflint:  -inf
 qflint:  -inf
 oflint:  -inf
 mflint:  -INF
 aflint:  -inf
```

2.2.6 NaN (Not a Number)

`ctx.nan()`

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns `NaN` (Not a Number).

An example in Python

```
>>> from xlcalcnet import *
>>> gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.nan))
    fpm:  NAN
    mpm:  nan
    dpm:  NaN
```

(continues on next page)

(continued from previous page)

```
   ipm: [nan,
         nan]
   gpm:  nan
   apm: nan
math53:  NaN
 sreal:  NaN
 dreal:  NaN
 ereal:  nan
 qreal:  NaN
 oreal:  nan
 mreal:  NAN
sflint:  NaN
dflint:  NaN
eflint:  nan
qflint:  NaN
oflint:  nan
mflint:  NAN
aflint:  nan
```

2.3 Properties of numbers

2.3.1 Test for signbit

`ctx.signbit`(x)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns `True` if the sign bit of x is set.

An example in Python

```
>>> from xlcalcnet import *
>>> x = -5.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.signbit(x)))
    fpm:  1
    mpm:  1.0
    dpm:  1
    ipm: [1.0,
          1.0]
    gpm:  1.0
    apm: 1.000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000
 math53:  1
  sreal:  1
  dreal:  1
  ereal:  1
  qreal:  1
  oreal:  1
  mreal:  1
 sflint:  1
 dflint:  1
 eflint:  1
 qflint:  1
 oflint:  1
 mflint:  1
 aflint:  1.000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000
```

2.3.2 Test for a finite number

`ctx.isfinite`(x)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns `True` if x is neither $+\infty$ nor $-\infty$ nor `NaN`.

An example in Python

```
>>> from xlcalcnet import *
>>> gui.setdps(90)
>>> xlist = [dreal.nan, dreal.neginf, -5.1, -0.0, 0.0, 8.8, dreal.inf]
>>> for ctx in gui.ctxlist_real:
...     res = []
...     for x in xlist: res.append(ctx.isfinite(x))
...     print(ctx.fmtname + ': ', res)
...
...
    fpm:  [False, False, True, True, True, True, False]
    mpm:  [False, False, True, True, True, True, False]
    dpm:  [False, False, True, True, True, True, False]
    ipm:  [False, False, True, True, True, True, False]
    gpm:  [False, False, True, True, True, True, False]
    apm:  [False, False, True, True, True, True, False]
 math53:  [False, False, True, True, True, True, False]
  sreal:  [False, False, True, True, True, True, False]
  dreal:  [False, False, True, True, True, True, False]
```

(continues on next page)

(continued from previous page)

```
 ereal:  [False, False, True, True, True, True, False]
 qreal:  [False, False, True, True, True, True, False]
 oreal:  [False, False, True, True, True, True, False]
 mreal:  [False, False, True, True, True, True, False]
sflint:  [False, False, True, True, True, True, False]
dflint:  [False, False, True, True, True, True, False]
eflint:  [False, False, True, True, True, True, False]
qflint:  [False, False, True, True, True, True, False]
oflint:  [False, False, True, True, True, True, False]
mflint:  [False, False, True, True, True, True, False]
aflint:  [False, False, True, True, True, True, False]
```

2.3.3 Test for infinity

`ctx.isinf`(x)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns `True` if x is either $+\infty$ or $-\infty$.

An example in Python

```
>>> from xlcalcnet import *
>>> gui.setdps(90)
>>> xlist = [dreal.nan, dreal.neginf, -5.1, -0.0, 0.0, 8.8, dreal.inf]
>>> for ctx in gui.ctxlist_real:
...     res = []
...     for x in xlist: res.append(ctx.isinf(x))
...     print(ctx.fmtname + ': ', res)
...
...
    fpm:  [False, True, False, False, False, False, True]
    mpm:  [False, True, False, False, False, False, True]
    dpm:  [False, True, False, False, False, False, True]
    ipm:  [False, True, False, False, False, False, True]
    gpm:  [False, True, False, False, False, False, True]
    apm:  [False, True, False, False, False, False, True]
 math53:  [False, True, False, False, False, False, True]
  sreal:  [False, True, False, False, False, False, True]
  dreal:  [False, True, False, False, False, False, True]
  ereal:  [False, True, False, False, False, False, True]
  qreal:  [False, True, False, False, False, False, True]
  oreal:  [False, True, False, False, False, False, True]
  mreal:  [False, True, False, False, False, False, True]
 sflint:  [False, True, False, False, False, False, True]
 dflint:  [False, True, False, False, False, False, True]
 eflint:  [False, True, False, False, False, False, True]
 qflint:  [False, True, False, False, False, False, True]
 oflint:  [False, True, False, False, False, False, True]
 mflint:  [False, True, False, False, False, False, True]
 aflint:  [False, True, False, False, False, False, True]
```

2.3.4 Test for positive infinity

`ctx.isposinf`(x)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns `True` if x is $+\infty$.

An example in Python

```
>>> from xlcalcnet import *
>>> gui.setdps(90)
```

(continues on next page)

(continued from previous page)

```
>>> xlist = [dreal.nan, dreal.neginf, -5.1, -0.0, 0.0, 8.8, dreal.inf]
>>> for ctx in gui.ctxlist_real:
...     res = []
...     for x in xlist: res.append(ctx.isposinf(x))
...     print(ctx.fmtname + ': ', res)
...
...
    fpm:  [False, False, False, False, False, False, True]
    mpm:  [False, False, False, False, False, False, True]
    dpm:  [False, False, False, False, False, False, True]
    ipm:  [False, False, False, False, False, False, True]
    gpm:  [False, False, False, False, False, False, True]
    apm:  [False, False, False, False, False, False, True]
 math53:  [False, False, False, False, False, False, True]
  sreal:  [False, False, False, False, False, False, True]
  dreal:  [False, False, False, False, False, False, True]
  ereal:  [False, False, False, False, False, False, True]
  qreal:  [False, False, False, False, False, False, True]
  oreal:  [False, False, False, False, False, False, True]
  mreal:  [False, False, False, False, False, False, True]
 sflint:  [False, False, False, False, False, False, True]
 dflint:  [False, False, False, False, False, False, True]
 eflint:  [False, False, False, False, False, False, True]
 qflint:  [False, False, False, False, False, False, True]
 oflint:  [False, False, False, False, False, False, True]
 mflint:  [False, False, False, False, False, False, True]
 aflint:  [False, False, False, False, False, False, True]
```

2.3.5 Test for negative infinity

`ctx.`**`isneginf`**(x)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns `True` if x is $-\infty$.

An example in Python

```
>>> from xlcalcnet import *
>>> gui.setdps(90)
>>> xlist = [dreal.nan, dreal.neginf, -5.1, -0.0, 0.0, 8.8, dreal.inf]
>>> for ctx in gui.ctxlist_real:
...     res = []
...     for x in xlist: res.append(ctx.isneginf(x))
...     print(ctx.fmtname + ': ', res)
...
...
    fpm:  [False, True, False, False, False, False, False]
    mpm:  [False, True, False, False, False, False, False]
    dpm:  [False, True, False, False, False, False, False]
    ipm:  [False, True, False, False, False, False, False]
    gpm:  [False, True, False, False, False, False, False]
    apm:  [False, True, False, False, False, False, False]
 math53:  [False, True, False, False, False, False, False]
  sreal:  [False, True, False, False, False, False, False]
  dreal:  [False, True, False, False, False, False, False]
  ereal:  [False, True, False, False, False, False, False]
  qreal:  [False, True, False, False, False, False, False]
  oreal:  [False, True, False, False, False, False, False]
  mreal:  [False, True, False, False, False, False, False]
 sflint:  [False, True, False, False, False, False, False]
 dflint:  [False, True, False, False, False, False, False]
 eflint:  [False, True, False, False, False, False, False]
 qflint:  [False, True, False, False, False, False, False]
 oflint:  [False, True, False, False, False, False, False]
```

(continues on next page)

(continued from previous page)

```
 mflint:  [False, True, False, False, False, False, False]
 aflint:  [False, True, False, False, False, False, False]
```

2.3.6 Test for NaN

`ctx.isnan(`x`)`

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns `True` if x is Nan (Not a number).

An example in Python

```
>>> from xlcalcnet import *
>>> gui.setdps(90)
>>> xlist = [dreal.nan, dreal.neginf, -5.1, -0.0, 0.0, 8.8, dreal.inf]
>>> for ctx in gui.ctxlist_real:
...     res = []
...     for x in xlist: res.append(ctx.isnan(x))
...     print(ctx.fmtname + ': ', res)
...
...
    fpm:  [True, False, False, False, False, False, False]
    mpm:  [True, False, False, False, False, False, False]
    dpm:  [True, False, False, False, False, False, False]
    ipm:  [True, False, False, False, False, False, False]
    gpm:  [True, False, False, False, False, False, False]
    apm:  [True, False, False, False, False, False, False]
 math53:  [True, False, False, False, False, False, False]
  sreal:  [True, False, False, False, False, False, False]
  dreal:  [True, False, False, False, False, False, False]
  ereal:  [True, False, False, False, False, False, False]
  qreal:  [True, False, False, False, False, False, False]
  oreal:  [True, False, False, False, False, False, False]
  mreal:  [True, False, False, False, False, False, False]
 sflint:  [True, False, False, False, False, False, False]
 dflint:  [True, False, False, False, False, False, False]
 eflint:  [True, False, False, False, False, False, False]
 qflint:  [True, False, False, False, False, False, False]
 oflint:  [True, False, False, False, False, False, False]
 mflint:  [True, False, False, False, False, False, False]
 aflint:  [True, False, False, False, False, False, False]
```

2.3.7 Test for zero

`ctx.iszero(`x`)`

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns `True` if x is 0 (+0 or -0).

An example in Python

```
>>> from xlcalcnet import *
>>> gui.setdps(90)
>>> xlist = [dreal.nan, dreal.neginf, -5.1, -0.0, 0.0, 8.8, dreal.inf]
>>> for ctx in gui.ctxlist_real:
...     res = []
...     for x in xlist: res.append(ctx.iszero(x))
...     print(ctx.fmtname + ': ', res)
...
...
    fpm:  [False, False, False, True, True, False, False]
    mpm:  [False, False, False, True, True, False, False]
```

(continues on next page)

(continued from previous page)

```
   dpm:  [False, False, False, True, True, False, False]
   ipm:  [False, False, False, True, True, False, False]
   gpm:  [False, False, False, True, True, False, False]
   apm:  [False, False, False, True, True, False, False]
 math53:  [False, False, False, True, True, False, False]
  sreal:  [False, False, False, True, True, False, False]
  dreal:  [False, False, False, True, True, False, False]
  ereal:  [False, False, False, True, True, False, False]
  qreal:  [False, False, False, True, True, False, False]
  oreal:  [False, False, False, True, True, False, False]
  mreal:  [False, False, False, True, True, False, False]
 sflint:  [False, False, False, True, True, False, False]
 dflint:  [False, False, False, True, True, False, False]
 eflint:  [False, False, False, True, True, False, False]
 qflint:  [False, False, False, True, True, False, False]
 oflint:  [False, False, False, True, True, False, False]
 mflint:  [False, False, False, True, True, False, False]
 aflint:  [False, False, False, True, True, False, False]
```

2.3.8 Test for one

`ctx.isone`(x)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns `True` if x is 1.

An example in Python

```
>>> from xlcalcnet import *
>>> gui.setdps(90)
>>> xlist = [dreal.nan, dreal.neginf, -5.1, -0.0, 0.0, 1.0, 8.8, dreal.inf]
>>> for ctx in gui.ctxlist_real:
...     res = []
...     for x in xlist: res.append(ctx.isone(x))
...     print(ctx.fmtname + ': ', res)
...
...
    fpm:  [False, False, False, False, False, True, False, False]
   mpm:  [False, False, False, False, False, True, False, False]
   dpm:  [False, False, False, False, False, True, False, False]
   ipm:  [False, False, False, False, False, True, False, False]
   gpm:  [False, False, False, False, False, True, False, False]
   apm:  [False, False, False, False, False, True, False, False]
 math53:  [False, False, False, False, False, True, False, False]
  sreal:  [False, False, False, False, False, True, False, False]
  dreal:  [False, False, False, False, False, True, False, False]
  ereal:  [False, False, False, False, False, True, False, False]
  qreal:  [False, False, False, False, False, True, False, False]
  oreal:  [False, False, False, False, False, True, False, False]
  mreal:  [False, False, False, False, False, True, False, False]
 sflint:  [False, False, False, False, False, True, False, False]
 dflint:  [False, False, False, False, False, True, False, False]
 eflint:  [False, False, False, False, False, True, False, False]
 qflint:  [False, False, False, False, False, True, False, False]
 oflint:  [False, False, False, False, False, True, False, False]
 mflint:  [False, False, False, False, False, True, False, False]
 aflint:  [False, False, False, False, False, True, False, False]
```

2.3.9 Test if a number is an integer

`ctx.isinteger(`x`)`

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns `True` if x is an integer.

An example in Python

```
>>> from xlcalcnet import *
>>> gui.setdps(90)
>>> xlist = [dreal.nan, dreal.neginf, -5.1, -0.0, 0.0, 1.0, 8.8, dreal.inf]
>>> for ctx in gui.ctxlist_real:
...     res = []
...     for x in xlist: res.append(ctx.isinteger(x))
...     print(ctx.fmtname + ': ', res)
...
...
    fpm:  [False, False, False, True, True, True, False, False]
    mpm:  [False, False, False, True, True, True, False, False]
    dpm:  [False, False, False, True, True, True, False, False]
    ipm:  [False, False, False, True, True, True, False, False]
    gpm:  [False, False, False, True, True, True, False, False]
    apm:  [False, False, False, True, True, True, False, False]
 math53:  [False, False, False, True, True, True, False, False]
  sreal:  [False, False, False, True, True, True, False, False]
  dreal:  [False, False, False, True, True, True, False, False]
  ereal:  [False, False, False, True, True, True, False, False]
  qreal:  [False, False, False, True, True, True, False, False]
  oreal:  [False, False, False, True, True, True, False, False]
  mreal:  [False, False, False, True, True, True, False, False]
 sflint:  [False, False, False, True, True, True, False, False]
 dflint:  [False, False, False, True, True, True, False, False]
 eflint:  [False, False, False, True, True, True, False, False]
 qflint:  [False, False, False, True, True, True, False, False]
 oflint:  [False, False, False, True, True, True, False, False]
 mflint:  [False, False, False, True, True, True, False, False]
 aflint:  [False, False, False, True, True, True, False, False]
```

2.3.10 Test if a number is a simple number (not an infinity or NaN)

`ctx.isnumber(`x`)`

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns `True` if x is an integer.

An example in Python

```
>>> from xlcalcnet import *
>>> gui.setdps(90)
>>> xlist = [dreal.nan, dreal.neginf, -5.1, -0.0, 0.0, 1.0, 8.8, dreal.inf]
>>> for ctx in gui.ctxlist_real:
...     res = []
...     for x in xlist: res.append(ctx.isnumber(x))
...     print(ctx.fmtname + ': ', res)
...
...
    fpm:  [False, False, True, True, True, True, True, False]
    mpm:  [False, False, True, True, True, True, True, False]
    dpm:  [False, False, True, True, True, True, True, False]
    ipm:  [False, False, True, True, True, True, True, False]
    gpm:  [False, False, True, True, True, True, True, False]
    apm:  [False, False, True, True, True, True, True, False]
 math53:  [False, False, True, True, True, True, True, False]
```

(continues on next page)

(continued from previous page)

```
  sreal:  [False, False, True, True, True, True, True, False]
  dreal:  [False, False, True, True, True, True, True, False]
  ereal:  [False, False, True, True, True, True, True, False]
  qreal:  [False, False, True, True, True, True, True, False]
  oreal:  [False, False, True, True, True, True, True, False]
  mreal:  [False, False, True, True, True, True, True, False]
 sflint:  [False, False, True, True, True, True, True, False]
 dflint:  [False, False, True, True, True, True, True, False]
 eflint:  [False, False, True, True, True, True, True, False]
 qflint:  [False, False, True, True, True, True, True, False]
 oflint:  [False, False, True, True, True, True, True, False]
 mflint:  [False, False, True, True, True, True, True, False]
 aflint:  [False, False, True, True, True, True, True, False]
```

2.3.11 Test if a number is a regular number (not zero, an infinity or NaN)

`ctx.`**`isregular`**`(`x`)`

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns `True` if x is a regular number (not zero, an infinity or NaN).

An example in Python

```
>>> from xlcalcnet import *
>>> gui.setdps(90)
>>> xlist = [dreal.nan, dreal.neginf, -5.1, -0.0, 0.0, 1.0, 8.8, dreal.inf]
>>> for ctx in gui.ctxlist_real:
...     res = []
...     for x in xlist: res.append(ctx.isregular(x))
...     print(ctx.fmtname + ': ', res)
...
...
    fpm:  [False, False, True, False, False, True, True, False]
    mpm:  [False, False, True, False, False, True, True, False]
    dpm:  [False, False, True, False, False, True, True, False]
    ipm:  [False, False, True, False, False, True, True, False]
    gpm:  [False, False, True, False, False, True, True, False]
    apm:  [False, False, True, False, False, True, True, False]
 math53:  [False, False, True, False, False, True, True, False]
  sreal:  [False, False, True, False, False, True, True, False]
  dreal:  [False, False, True, False, False, True, True, False]
  ereal:  [False, False, True, False, False, True, True, False]
  qreal:  [False, False, True, False, False, True, True, False]
  oreal:  [False, False, True, False, False, True, True, False]
  mreal:  [False, False, True, False, False, True, True, False]
 sflint:  [False, False, True, False, False, True, True, False]
 dflint:  [False, False, True, False, False, True, True, False]
 eflint:  [False, False, True, False, False, True, True, False]
 qflint:  [False, False, True, False, False, True, True, False]
 oflint:  [False, False, True, False, False, True, True, False]
 mflint:  [False, False, True, False, False, True, True, False]
 aflint:  [False, False, True, False, False, True, True, False]
```

2.3.12 Test if a number is a normal number (not subnormal, zero, an infinity or NaN)

`ctx.`**`isnormal`**`(`x`)`

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns `True` if x is a normal number (not subnormal, zero, an infinity or NaN)

An example in Python

```
>>> from xlcalcnet import *
>>> gui.setdps(90)
>>> xlist = [dreal.nan, dreal.neginf, -5.1, -0.0, 0.0, 1.0, 8.8, dreal.inf]
>>> for ctx in gui.ctxlist_real:
...     res = []
...     for x in xlist: res.append(ctx.isnormal(x))
...     print(ctx.fmtname + ': ', res)
...
...
    fpm:  [False, False, True, False, False, True, True, False]
    mpm:  [False, False, True, False, False, True, True, False]
    dpm:  [False, False, True, False, False, True, True, False]
    ipm:  [False, False, True, False, False, True, True, False]
    gpm:  [False, False, True, False, False, True, True, False]
    apm:  [False, False, True, False, False, True, True, False]
 math53:  [False, False, True, False, False, True, True, False]
  sreal:  [False, False, True, False, False, True, True, False]
  dreal:  [False, False, True, False, False, True, True, False]
  ereal:  [False, False, True, False, False, True, True, False]
  qreal:  [False, False, True, False, False, True, True, False]
  oreal:  [False, False, True, False, False, True, True, False]
  mreal:  [False, False, True, False, False, True, True, False]
 sflint:  [False, False, True, False, False, True, True, False]
 dflint:  [False, False, True, False, False, True, True, False]
 eflint:  [False, False, True, False, False, True, True, False]
 qflint:  [False, False, True, False, False, True, True, False]
 oflint:  [False, False, True, False, False, True, True, False]
 mflint:  [False, False, True, False, False, True, True, False]
 aflint:  [False, False, True, False, False, True, True, False]
```

2.3.13 Test if 2 numbers are unordered

`ctx.`**`isunordered`**(x, y)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns `True` if x and y are unordered.

An example in Python

```
>>> from xlcalcnet import *
>>> gui.setdps(90)
>>> xlist = [dreal.nan, dreal.neginf, '-2147483649', '-2147483648', 0.0, '2147483647', '2147483648', dreal.inf]
>>> for ctx in gui.ctxlist_real:
...     res = []
...     for x in xlist: res.append(ctx.fitsint32(x))
...     print(ctx.fmtname + ': ', res)
...
...
    fpm:  [False, False, False, True, True, True, False, False]
    mpm:  [False, False, False, True, True, True, False, False]
    dpm:  [False, False, False, True, True, True, False, False]
    ipm:  [False, False, False, True, True, True, False, False]
    gpm:  [False, False, False, True, True, True, False, False]
    apm:  [False, False, False, True, True, True, False, False]
 math53:  [False, False, False, True, True, True, False, False]
  sreal:  [False, False, True, True, True, True, True, False]
  dreal:  [False, False, False, True, True, True, False, False]
  ereal:  [False, False, False, True, True, True, False, False]
  qreal:  [False, False, False, True, True, True, False, False]
  oreal:  [False, False, False, True, True, True, False, False]
  mreal:  [False, False, False, True, True, True, False, False]
 sflint:  [False, False, True, True, True, True, True, False]
 dflint:  [False, False, False, True, True, True, False, False]
 eflint:  [False, False, False, True, True, True, False, False]
 qflint:  [False, False, False, True, True, True, False, False]
```

(continues on next page)

(continued from previous page)

```
 oflint:  [False, False, False, True, True, True, False, False]
 mflint:  [False, False, False, True, True, True, False, False]
 aflint:  [False, False, False, True, True, True, False, False]
```

2.3.14 Test if a number fits in a signed 32 bit integer

`ctx.`**`fitsint32`**`(`x`)`

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Test if a number fits in a signed 32 bit integer

An example in Python

```
>>> from xlcalcnet import *
>>> gui.setdps(90)
>>> xlist = [dreal.nan, dreal.neginf, '-2147483649', '-2147483648', 0.0, '2147483647', '2147483648', dreal.inf]
>>> for ctx in gui.ctxlist_real:
...     res = []
...     for x in xlist: res.append(ctx.fitsint32(x))
...     print(ctx.fmtname + ': ', res)
...
...
    fpm:  [False, False, False, True, True, True, False, False]
    mpm:  [False, False, False, True, True, True, False, False]
    dpm:  [False, False, False, True, True, True, False, False]
    ipm:  [False, False, False, True, True, True, False, False]
    gpm:  [False, False, False, True, True, True, False, False]
    apm:  [False, False, False, True, True, True, False, False]
 math53:  [False, False, False, True, True, True, False, False]
  sreal:  [False, False, True, True, True, True, True, False]
  dreal:  [False, False, False, True, True, True, False, False]
  ereal:  [False, False, False, True, True, True, False, False]
  qreal:  [False, False, False, True, True, True, False, False]
  oreal:  [False, False, False, True, True, True, False, False]
  mreal:  [False, False, False, True, True, True, False, False]
 sflint:  [False, False, True, True, True, True, True, False]
 dflint:  [False, False, False, True, True, True, False, False]
 eflint:  [False, False, False, True, True, True, False, False]
 qflint:  [False, False, False, True, True, True, False, False]
 oflint:  [False, False, False, True, True, True, False, False]
 mflint:  [False, False, False, True, True, True, False, False]
 aflint:  [False, False, False, True, True, True, False, False]
```

2.3.15 Test if a number fits in a signed 64 bit integer

`ctx.`**`fitsint64`**`(`x`)`

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Test if a number fits in a signed 64 bit integer

An example in Python

```
>>> from xlcalcnet import *
>>> gui.setdps(90)
>>> xlist = [dreal.nan, dreal.neginf, '-9223372036854775809', '-9223372036854775808', \
    0.0, '9223372036854775807', '9223372036854775808', dreal.inf]
>>> for ctx in gui.ctxlist_real:
...     res = []
...     for x in xlist: res.append(ctx.fitsint64(x))
...     print(ctx.fmtname + ': ', res)
...
...
```

(continues on next page)

(continued from previous page)

```
   fpm:  [False, False, True, True, True, True, True, False]
   mpm:  [False, False, False, True, True, True, False, False]
   dpm:  [False, False, False, True, True, True, False, False]
   ipm:  [False, False, False, True, True, True, False, False]
   gpm:  [False, False, False, True, True, True, False, False]
   apm:  [False, False, False, True, True, True, False, False]
math53:  [False, False, True, True, True, True, True, False]
 sreal:  [False, False, True, True, True, True, True, False]
 dreal:  [False, False, True, True, True, True, True, False]
 ereal:  [False, False, False, True, True, True, False, False]
 qreal:  [False, False, False, True, True, True, False, False]
 oreal:  [False, False, False, True, True, True, False, False]
 mreal:  [False, False, False, True, True, True, False, False]
sflint:  [False, False, False, False, True, False, False, False]
dflint:  [False, False, False, False, True, False, False, False]
eflint:  [False, False, False, False, True, False, False, False]
qflint:  [False, False, False, False, True, False, False, False]
oflint:  [False, False, False, False, True, False, False, False]
mflint:  [False, False, False, True, True, True, False, False]
aflint:  [False, False, False, True, True, True, False, False]
```

2.4 Integer related functions

2.4.1 Integral value nearest x (rounding to nearest): $\mathrm{nearbyint}(x), \mathrm{rint}(x)$

`ctx.rint(`x`)`

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns the integral value (in floating-point format) nearest x, using the `rounding-to-nearest` rounding mode.

For the std::rint function:

- If num is $\pm\infty$, it is returned, unmodified.
- If num is ± 0, it is returned, unmodified.
- If num is NaN, NaN is returned.

See also: https://en.cppreference.com/w/cpp/numeric/math/nearbyint

See also: https://en.cppreference.com/w/cpp/numeric/math/rint

An example in Python

```
>>> from xlcalcnet import *
>>> x = -5.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.rint(x)))
    fpm:  -5
    mpm:  -5.0
    dpm:  -5
    ipm: [-5.0,
          -5.0]
    gpm:  -5.0
    apm: -5.000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000
 math53:  -5
  sreal:  -5
  dreal:  -5
  ereal:  -5
  qreal:  -5
  oreal:  -5
  mreal:  -5
 sflint:  -5
 dflint:  -5
 eflint:  -5
 qflint:  -5
 oflint:  -5
 mflint:  -5
 aflint:  -5.000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000
```

`ctx.nearbyint(`x`)`

Is an alias for `ctx.rint(x)` in this implementation. The only difference between `std::rint` and `std::nearbyint` is that `std::nearbyint` never raises `FE_INEXACT`.

2.4.2 32 bit integer nearest x (rounding to nearest): $\mathrm{lrint}(x)$

`ctx.lrint(`x`)`

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns an 32 bit signed integer nearest x, using the `rounding-to-nearest` rounding mode.

If the result is outside the range representable by an 32 bit signed integer, a domain error or a range error may occur.

An example in Python

```
>>> from xlcalcnet import *
>>> x = -5345346.7; gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + str(ctx.lrint(x)))
    fpm: -5345347
    mpm: -5345347
    dpm: -5345347
    ipm: -5345347
    gpm: -5345347
    apm: -5345347
 math53: -5345347
  sreal: -5345346
  dreal: -5345347
  ereal: -5345347
  qreal: -5345347
  oreal: -5345347
  mreal: -5345347
 sflint: -5345346
 dflint: -5345347
 eflint: -5345347
 qflint: -5345347
 oflint: -5345347
 mflint: -5345347
 aflint: -5345347
```

2.4.3 64 bit integer nearest x (rounding to nearest): $\mathrm{llrint}(x)$

`ctx.llrint`(x)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns an 64 bit signed integer nearest x, using the `rounding-to-nearest` rounding mode.

If the result is outside the range representable by an 64 bit signed integer, a domain error or a range error may occur.

An example in Python

```
>>> from xlcalcnet import *
>>> x = '-9223372036854775807.2'; gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + str(ctx.llrint(x)))
    fpm: -9223372036854775808
    mpm: -9223372036854775807
    dpm: -9223372036854775807
    ipm: -9223372036854775807
    gpm: -9223372036854775807
    apm: -9223372036854775807
 math53: -9223372036854775808
  sreal: -9223372036854775808
  dreal: -9223372036854775808
  ereal: -9223372036854775807
  qreal: -9223372036854775807
  oreal: -9223372036854775807
  mreal: -9223372036854775807
 sflint: -9223372036854775808
 dflint: -9223372036854775808
 eflint: -9223372036854775807
 qflint: -9223372036854775807
 oflint: -9223372036854775807
 mflint: -9223372036854775807
 aflint: -9223372036854775807
```

2.4.4 Smallest integral value not less than x : ceil(x)

`ctx.ceil`(x)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns the smallest integer $> x$; $|x| \leq$ MaxLongint.

See also: https://en.cppreference.com/w/cpp/numeric/math/ceil

An example in Python

```
>>> from xlcalcnet import *
>>> x = -5.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.ceil(x)))
    fpm:  -5
    mpm:  -5.0
    dpm:  -5
    ipm: [-5.0,
          -5.0]
    gpm:  -5.0
    apm: -5.000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000
 math53:  -5
  sreal:  -5
  dreal:  -5
  ereal:  -5
  qreal:  -5
  oreal:  -5
  mreal:  -5
 sflint:  -5
 dflint:  -5
 eflint:  -5
 qflint:  -5
 oflint:  -5
 mflint:  -5
 aflint:  -5.000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000
```

2.4.5 Largest integral value not greater than x : floor(x)

`ctx.floor`(x)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns the largest integer $< x$; $|x| \leq$ MaxLongint.

See also: https://en.cppreference.com/w/cpp/numeric/math/floor

An example in Python

```
>>> from xlcalcnet import *
>>> x = -5.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.floor(x)))
    fpm:  -5
    mpm:  -5.0
    dpm:  -5
    ipm: [-5.0,
          -5.0]
    gpm:  -5.0
    apm: -5.000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000
 math53:  -5
  sreal:  -5
  dreal:  -5
  ereal:  -5
  qreal:  -5
  oreal:  -5
  mreal:  -5
 sflint:  -5
```

(continues on next page)

(continued from previous page)

```
dflint:  -5
eflint:  -5
qflint:  -5
oflint:  -5
mflint:  -5
aflint:  -5.0000000000
```

(continued from previous page)

```
         -5.0]
   gpm:  -5.0
   apm: -5.0000000000
```

```
>>> from xlcalcnet import *
>>> x = '-9223372036854775807.2'; gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + str(ctx.llround(x)))
    fpm: -9223372036854775808
    mpm: -9223372036854775807
    dpm: -9223372036854775807
    ipm: -9223372036854775807
    gpm: -9223372036854775807
    apm: -9223372036854775807
 math53: -9223372036854775808
  sreal: -9223372036854775808
  dreal: -9223372036854775808
  ereal: -9223372036854775807
  qreal: -9223372036854775807
  oreal: -9223372036854775807
  mreal: -9223372036854775807
 sflint: -9223372036854775808
 dflint: -9223372036854775808
 eflint: -9223372036854775807
 qflint: -9223372036854775807
 oflint: -9223372036854775807
 mflint: -9223372036854775807
 aflint: -9223372036854775807
```

2.5 Floating point functions for real numbers

2.5.1 Efficient computation of $|x| \cdot \text{sign}(y) : \text{copysign}(x, y)$

`ctx.copysign`(*mag*, *sgn*)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns $|x| \cdot \text{sign}(y)$.

See also: https://en.cppreference.com/w/cpp/numeric/math/copysign

An example in Python

```
>>> from xlcalcnet import *
>>> x = -5.1; gui.setdps(90)
>>> y = 1.0
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.copysign(x, y)))
    fpm:  5.1
    mpm:  5.1
    dpm:  5.1
    ipm: [5.09999999999999999999999999999999999999999999999999999999999999999999999999999999999992145,
          5.10000000000000000000000000000000000000000000000000000000000000000000000000000000000001964]
    gpm:  5.10000000000000000000000000000000000000000000000000000000000000000000000000000000000000002
    apm: [5.10000000000000000000000000000000000000000000000000000000000000000000000000000000000000000 +/- 1.77e-90]
 math53:  5.1
  sreal:  5.1
  dreal:  5.1
  ereal:  5.0999999999999999999
  qreal:  5.1
  oreal:  5.1
  mreal:  5.1
 sflint:  5.1
 dflint:  5.1
 eflint:  5.0999999999999999999
 qflint:  5.1
 oflint:  5.1
 mflint:  5.1
 aflint: [5.10000000000000000000000000000000000000000000000000000000000000000000000000000000000000000 +/- 1.58e-90]
```

2.5.2 Decomposition of x as $x = m \cdot 2^e; 0.5 < m < 1 : \text{frexp}(x)$

`ctx.frexp`(x)

where `ctx` is `math53`, `ctxboost` or `ctxflint`. See also Mpmath [680].

Returns (as a tuple) the mantissa m and exponent e of x with $x = m \cdot 2^e, 0.5 < m < 1$.

If x is 0, $\pm\infty$ or NaN, returns $m = x, e = 0$.

See also: https://en.cppreference.com/w/cpp/numeric/math/frexp

See also: https://en.cppreference.com/w/cpp/numeric/math/ilogb

See also: https://en.cppreference.com/w/cpp/numeric/math/logb

Ilogb: Returns base 2 exponent of x. For finite x ilogb = floor(log2($|x|$)), otherwise -MaxLongint for x = 0 or MaxLongint if x = +-INF or Nan.

Extracts the value of the unbiased exponent from the floating-point argument num, and returns it as a signed integer value. The value of the exponent returned by `std::ilogb` is always 1 less than the exponent returned by `std::frexp` because of the different normalization requirements: for the exponent e returned by `std::ilogb`, $|num * 2^{-e}|$ is between 1 and 2, but for the exponent e returned by std::frexp, $|num * 2^{-e}|$ is between 0.5 and 1.

If the implementation supports IEEE floating-point arithmetic (IEC 60559),

- If num is ± 0, $-\inf$ is returned and FE_DIVBYZERO is raised.
- If num is $\pm\inf$, $+\inf$ is returned.
- If num is NaN, NaN is returned.

In all other cases, the result is exact (FE_INEXACT is never raised) and the current rounding mode is ignored.

An example in Python

```
>>> from xlcalcnet import *
>>> x = -5.1; gui.setdps(30)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ', ctx.frexp(x))
    fpm:  (-0.6375, 3)
    mpm:  (mpf('-0.63750000000000000000000000000039'), 3)
    dpm:  (Decimal('-0.6375'), 3)
    ipm:  (mpi('-0.63750000000000000000000000000039', '-0.63749999999999999999999999999941'), 3)
    gpm:  (mpfr('-0.63750000000000000000000000000039',103), 3)
    apm:  ([-0.63750000000000000000000000000 +/- 1.58e-31], 3)
 math53:  (-0.6375, 3)
  sreal:  (-0.6375, 3)
  dreal:  (-0.6375, 3)
  ereal:  (-0.63749999999999999999, 3)
  qreal:  (-0.6375, 3)
  oreal:  (-0.6375, 3)
  mreal:  (-0.6375, 3)
 sflint:  (-0.6375, 3)
 dflint:  (-0.6375, 3)
 eflint:  (-0.63749999999999999999, 3)
 qflint:  (-0.6375, 3)
 oflint:  (-0.6375, 3)
 mflint:  (-0.6375, 3)
 aflint:  ([-0.63750000000000000000000000000 +/- 9.47e-31], 3)
```

2.5.3 Integral value e, from the decomposition of x as $x = m \cdot 2^e; 1 < m < 2 : \mathrm{logb}(x)$

`ctx.logb`(x)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns (as a tuple) the mantissa m and exponent e of x with $x = m \cdot 2^e, 0.5 < m < 1$.

If x is 0, $\pm\infty$ or NaN, returns $m = x, e = 0$.

See also: https://en.cppreference.com/w/cpp/numeric/math/frexp

See also: https://en.cppreference.com/w/cpp/numeric/math/ilogb

See also: https://en.cppreference.com/w/cpp/numeric/math/logb

Logb: Returns base 2 exponent of x. For finite x logb = floor(log2($|x|$)), otherwise -MaxLongint for x = 0 or MaxLongint if x = +-INF or Nan.

Extracts the value of the unbiased exponent from the floating-point argument num, and returns it as a signed integer value. The value of the exponent returned by `std::ilogb` is always 1 less than the exponent returned by `std::frexp` because of the different normalization requirements: for the exponent e returned by `std::ilogb`, $|num * 2^{-e}|$ is between 1 and 2, but for the exponent e returned by std::frexp, $|num * 2^{-e}|$ is between 0.5 and 1.

If the implementation supports IEEE floating-point arithmetic (IEC 60559),

- If num is ± 0, $-\inf$ is returned and FE_DIVBYZERO is raised.
- If num is $\pm\inf$, $+\inf$ is returned.
- If num is NaN, NaN is returned.

In all other cases, the result is exact (FE_INEXACT is never raised) and the current rounding mode is ignored.

An example in Python

```
>>> from xlcalcnet import *
>>> x = -5.1; gui.setdps(30)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.logb(x)))
    fpm:  2
    mpm:  2.0
    dpm:  2
    ipm: [2.0,
          2.0]
    gpm:  2.0
    apm: 2.000000000000000000000000000000
 math53:  2
  sreal:  2
  dreal:  2
  ereal:  2
  qreal:  2
  oreal:  2
  mreal:  2
 sflint:  2
 dflint:  2
 eflint:  2
 qflint:  2
 oflint:  2
 mflint:  2
 aflint:  2.000000000000000000000000000000
```

2.5.4 32 bit integer e, from the decomposition of x as $x = m \cdot 2^e; 1 < m < 2$: ilogb(x)

`ctx.ilogb(`x`)`

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns (as a tuple) the mantissa m and exponent e of x with $x = m \cdot 2^e, 0.5 < m < 1$.

If x is 0, $\pm\infty$ or NaN, returns $m = x, e = 0$.

See also: https://en.cppreference.com/w/cpp/numeric/math/frexp

See also: https://en.cppreference.com/w/cpp/numeric/math/ilogb

See also: https://en.cppreference.com/w/cpp/numeric/math/logb

Ilogb: Returns base 2 exponent of x. For finite x ilogb = floor(log2(|x|)), otherwise -MaxLongint for x = 0 or MaxLongint if x = +-INF or Nan.

Extracts the value of the unbiased exponent from the floating-point argument num, and returns it as a signed integer value. The value of the exponent returned by `std::ilogb` is always 1 less than the exponent returned by `std::frexp` because of the different normalization requirements: for the exponent e returned by `std::ilogb`, $|num * 2^{-e}|$ is between 1 and 2, but for the exponent e returned by std::frexp, $|num * 2^{-e}|$ is between 0.5 and 1.

If the implementation supports IEEE floating-point arithmetic (IEC 60559),

- If num is ± 0, $-\inf$ is returned and FE_DIVBYZERO is raised.
- If num is $\pm\inf$, $+\inf$ is returned.
- If num is NaN, NaN is returned.

In all other cases, the result is exact (FE_INEXACT is never raised) and the current rounding mode is ignored.

An example in Python

```
>>> from xlcalcnet import *
>>> x = -5.1; gui.setdps(30)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ', ctx.ilogb(x))
    fpm:  2
    mpm:  2
    dpm:  2
    ipm:  2
    gpm:  2
    apm:  2
 math53:  2
  sreal:  2
  dreal:  2
  ereal:  2
  qreal:  2
  oreal:  2
  mreal:  2
 sflint:  2
 dflint:  2
 eflint:  2
 qflint:  2
 oflint:  2
 mflint:  2
 aflint:  2
```

2.5.5 Efficient computation of $x \cdot 2^e$: $\mathrm{ldexp}(x, e), \mathrm{scalbn}(x, e), \mathrm{scalbln}(x, e)$

`ctx.`**`ldexp`**(x, e)

where `ctx` is `math53`, `ctxboost` or `ctxflint`. See also Mpmath [684].

Returns $x \cdot 2^e$

On binary systems (where `FLT_RADIX` is 2), `std::scalbn` is equivalent to std::ldexp.

Although `std::scalbn` and `std::scalbln` are specified to perform the operation efficiently, on many implementations they are less efficient than multiplication or division by a power of two using arithmetic operators.

The function name stands for "new scalb", where scalb was an older non-standard function whose second argument had floating-point type.

The `std::scalbln` function is provided because the factor required to scale from the smallest positive floating-point value to the largest finite one may be greater than 32767, the standard-guaranteed INT_MAX. In particular, for the 80-bit long double, the factor is 32828.

See also: https://en.cppreference.com/w/cpp/numeric/math/ldexp

See also: https://en.cppreference.com/w/cpp/numeric/math/scalbn

An example in Python

```
>>> from xlcalcnet import *
>>> x = -5.1; gui.setdps(90)
>>> e = 10
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.ldexp(x, e)))
    fpm:  -5222.4
    mpm:  -5222.4
    dpm:  -5222.4
    ipm: [-5222.400000000000
```

(continued from previous page)

```
 qreal:  -5222.4
 oreal:  -5222.4
 mreal:  -5222.4
sflint:  -5222.4
dflint:  -5222.4
eflint:  -5222.3999999999999999
qflint:  -5222.4
oflint:  -5222.4
mflint:  -5222.4
aflint: [-5222.400000000000
```

2.6 Fraction and remainder related functions

2.6.1 Integral and fractional part of a floating point number: $\mathrm{modf}(x)$

`ctx.modf`(x)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns (as a tuple) frac(x) and trunc(x) in ip, $|x| <$ MaxLongint

Decomposes given floating point value num into integral and fractional parts, each having the same type and sign as num. The integral part (in floating-point format) is stored in the object pointed to by iptr.

If the implementation supports IEEE floating-point arithmetic (IEC 60559),

- If num is ± 0, ± 0 is returned, and ± 0 is stored in `*iptr`.
- If num is $\pm \inf$, ± 0 is returned, and $\pm \inf$ is stored in `*iptr`.
- If num is NaN, NaN is returned, and NaN is stored in `*iptr`.

The returned value is exact, the current rounding mode is ignored.

See also: https://en.cppreference.com/w/cpp/numeric/math/modf

An example in Python

```
>>> from xlcalcnet import *
>>> x = -5.1; gui.setdps(30)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ', ctx.modf(x))
    fpm:  (-5.0, -0.09999999999999964)
    mpm:  (mpf('-5.0'), mpf('-0.10000000000000000000000000000316'))
    dpm:  (Decimal('-5'), Decimal('-0.1'))
    ipm:  (mpi('-5.0', '-5.0'), mpi('-0.10000000000000000000000000000316', '-0.09999999999999999999999999995267'))
    gpm:  (mpfr('-5.0',103), mpfr('-0.10000000000000000000000000000316',103))
    apm:  (-5.000000000000000000000000000000, [-0.10000000000000000000000000 +/- 1.30e-30])
 math53:  (-5, -0.0999999999999996)
  sreal:  (-5, -0.0999999)
  dreal:  (-5, -0.0999999999999996)
  ereal:  (-5, -0.09999999999999999913)
  qreal:  (-5, -0.09999999999999999999999999999997)
  oreal:  (-5, -0.09999999999999999999999999999999999999999999999999999999999999999999999986)
  mreal:  (-5, -0.09999999999999999999999999987)
 sflint:  (-5, -0.0999999)
 dflint:  (-5, -0.0999999999999996)
 eflint:  (-5, -0.09999999999999999913)
 qflint:  (-5, -0.09999999999999999999999999999997)
 oflint:  (-5, -0.09999999999999999999999999999999999999999999999999999999999999999999999986)
 mflint:  (-5, -0.09999999999999999999999999987)
 aflint:  ( -5.000000000000000000000000000000, [-0.10000000000000000000000000000 +/- 2.53e-30])
```

2.6.2 Floating point remainder: $\mathrm{fmod}(x, y)$

`ctx.fmod`(x, y)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns the floating-point remainder of the division operation `x / y` calculated by this function is exactly the value `x - rem * y`, where `rem` is `x / y` with its fractional part truncated.

The returned value has the same sign as x and is less than y in magnitude.

If the implementation supports IEEE floating-point arithmetic (IEC 60559),

- If x is ± 0 and y is not zero, ± 0 is returned.
- If x is $\pm \inf$ and y is not NaN, NaN is returned and FE_INVALID is raised.

- If y is ± 0 and x is not NaN, NaN is returned and FE_INVALID is raised.
- If y is $\pm \inf$ and x is finite, x is returned.
- If either argument is NaN, NaN is returned.

See also: https://en.cppreference.com/w/cpp/numeric/math/fmod

An example in Python

```
>>> from xlcalcnet import *
>>> x = 7.5; y = 2.1; gui.setdps(30)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.fmod(x, y)))
    fpm:  1.2
    mpm:  1.2
    dpm:  1.2
    ipm: [1.19999999999999999999999999990534,
          1.20000000000000000000000000002367]
    gpm:  1.20000000000000000000000000000024
    apm: [1.20000000000000000000000000000000 +/- 2.61e-30]
 math53:  1.2
  sreal:  1.2
  dreal:  1.2
  ereal:  1.2000000000000000003
  qreal:  1.2
  oreal:  1.2
  mreal:  1.2
 sflint:  1.2
 dflint:  1.2
 eflint:  1.2000000000000000003
 qflint:  1.2
 oflint:  1.2
 mflint:  1.2
 aflint: [1.20000000000000000000000000000000 +/- 7.58e-30]
```

2.6.3 IEEE floating point remainder: $\mathrm{remainder}(x, y)$

`ctx.remainder`(x, y)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns the IEEE754 remainder x REM y = x - rmNearest(x/y)*y.

The IEEE floating-point remainder of the division operation `x / y` calculated by this function is exactly the value `x - quo * y`, where the value `quo` is the integral value nearest the exact value `x / y`. When `|quo - x / y| = 0.5`, the value `quo` is chosen to be even.

In contrast to std::fmod, the returned value is not guaranteed to have the same sign as x.

If the returned value is zero, it will have the same sign as x.

If the implementation supports IEEE floating-point arithmetic (IEC 60559),

- The current rounding mode has no effect.
- FE_INEXACT is never raised, the result is always exact.
- If x is $\pm \inf$ and y is not NaN, NaN is returned and FE_INVALID is raised.
- If y is ± 0 and x is not NaN, NaN is returned and FE_INVALID is raised.
- If either argument is NaN, NaN is returned.

See also: https://en.cppreference.com/w/cpp/numeric/math/remainder

An example in Python

```
>>> from xlcalcnet import *
>>> x = 7.5; y = 2.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.remainder(x, y)))
    fpm:  -0.9
    mpm:  -0.900000000000
```

(continued from previous page)

```
 dreal:  (-0.9, 4)
 ereal:  (-0.89999999999999999965, 4)
 qreal:  (-0.9, 4)
 oreal:  (-0.900000000000000000000000000000000000000000000000000000000000000000000000000000000001, 4)
 mreal:  (-0.899999999999999999999999999995, 4)
sflint:  (-0.8999996, 4)
dflint:  (-0.9, 4)
eflint:  (-0.89999999999999999965, 4)
qflint:  (-0.9, 4)
oflint:  (-0.900000000000000000000000000000000000000000000000000000000000000000000000000000000001, 4)
mflint:  (-0.899999999999999999999999999995, 4)
aflint:  ([-0.900000000000000000000000000 +/- 1.02e-29], 4)
```

2.6.5 Fractional part of a floating point number: $\mathrm{frac}(x)$

`ctx.`**`frac`**`(`x`)`

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns the fractional part of x, that is, $\mathrm{frac}(x) = x - floor(x)$.

An example in Python

```
>>> from xlcalcnet import *
>>> x = -5.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.frac(x)))
    fpm:  0.9
    mpm:  0.9
    dpm:  0.9
    ipm: [0.899999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999980364,
          0.900000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000078545]
    gpm:  0.899999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999998
    apm: [0.900000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000 +/- 1.77e-90]
 math53:  0.9
  sreal:  0.9000001
  dreal:  0.9
  ereal:  0.90000000000000009
  qreal:  0.9
  oreal:  0.900000000000000000000000000000000000000000000000000000000000000000000000000000000001
  mreal:  0.900000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000001
 sflint:  0.9000001
 dflint:  0.9
 eflint:  0.90000000000000009
 qflint:  0.9
 oflint:  0.900000000000000000000000000000000000000000000000000000000000000000000000000000000001
 mflint:  0.900000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000001
 aflint: [0.900000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000 +/- 1.58e-90]
```

2.6.6 Fractional part of a floating point number (symmetric function): $\mathrm{fractionalpart}(x)$

`ctx.`**`fractionalpart`**`(`x`)`

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns the fractional part of x as a symmetric function:

$\mathrm{fractionalpart}(x) = \mathrm{frac}(x)$ for $x \geq 0$ and $\mathrm{fractionalpart}(x) = -\mathrm{frac}(-x)$ for $x < 0$.

An example in Python

```
>>> from xlcalcnet import *
>>> x = -5.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.fractionalpart(x)))
    fpm:  -0.0999999999999996
```

(continues on next page)

(continued from previous page)

```
   mpm:  -0.1
   dpm:  -0.1
   ipm: [-0.10000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000019636,
         -0.09999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999214545]
   gpm:  -0.10000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000002
   apm: [-0.10000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000 +/- 1.81e-90]
math53:  -0.0999999999999996
 sreal:  -0.0999999
 dreal:  -0.0999999999999996
 ereal:  -0.09999999999999999913
 qreal:  -0.09999999999999999999999999999997
 oreal:  -0.09999999999999999999999999999999999999999999999999999999999999999999999999999986
 mreal:  -0.09999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999992
sflint:  -0.0999999
dflint:  -0.0999999999999996
eflint:  -0.09999999999999999913
qflint:  -0.09999999999999999999999999999997
oflint:  -0.09999999999999999999999999999999999999999999999999999999999999999999999999999986
mflint:  -0.09999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999992
aflint: [-0.10000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000 +/- 1.58e-90]
```

2.7 Functions related to mantissa width and exponent range

2.7.1 Machine Epsilon

`ctx.epsilon()`

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns the machine epsilon for the given data type. See also Wikipedia [1258].

See also: https://docs.python.org/3/library/sys.html#sys.float_info

An example in Python

```
>>> from xlcalcnet import *
>>> gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.epsilon()))
    fpm:  2.22044604925031E-16
    mpm:  2.4545467326488632765478859774931378214876077562497247825557745585935526273608579282300489420187e-91
    dpm:  1E-89
    ipm: [2.4545467326488632765478859774931378214876077562497247825557745585935526273608579282300489420187e-91,
          2.4545467326488632765478859774931378214876077562497247825557745585935526273608579282300489420187e-91]
    gpm:  2.4545467326488632765478859774931378214876077562497247825557745585935526273608579282300489420187e-91
    apm: [2.4545467326488632765478859774931378214876077562497247825557745585935526273608579282300489420187e-91 +/- 2.02e-
↪181]
 math53:  2.22044604925031E-16
  sreal:  1.192093E-07
  dreal:  2.22044604925031E-16
  ereal:  1.0842021724855044e-19
  qreal:  1.9259299443872358530559779425849 3e-34
  oreal:  9.055679078826712367509119290887791780682531198139138189582614889935 5013e-72
  mreal:  9.8181869305954531061915439099725512859504310249988991302230982343742105094434317129201957 7E-91
 sflint:  1.192093E-07
 dflint:  2.22044604925031E-16
 eflint:  1.0842021724855044e-19
 qflint:  1.9259299443872358530559779425849 3e-34
 oflint:  9.055679078826712367509119290887791780682531198139138189582614889935 5013e-72
 mflint:  9.8181869305954531061915439099725512859504310249988991302230982343742105094434317129201957 7E-91
 aflint: [9.8181869305954531061915439099725512859504310249988991302230982343742105094434317129201957 7e-91 +/- 1.93e-
↪181]
```

2.7.2 Unit in the last place

`ctx.ulp(`x`)`

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns the "unit in the last place" for a specified floating-point value x, i.e.the smallest representable positive number u with $x + u > x$.

See also: https://docs.python.org/3/library/math.html#math.ulp

See also: https://en.wikipedia.org/wiki/Unit_in_the_last_place

See also: https://www.boost.org/doc/libs/1_85_0/libs/math/doc/html/math_toolkit/next_float/ulp.html

An example in Python

```
>>> from xlcalcnet import *
>>> x = -500000.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.ulp(x)))
    fpm:  5.82076609134674E-11
    mpm:  6.4344469868350361476736902168396112107604744765432785339830096588794825994688474073793795e-86
    dpm:  1E-84
    ipm: [6.4344469868350361476736902168396112107604744765432785339830096588794825994688474073793794985654e-86,
          6.4344469868350361476736902168396112107604744765432785339830096588794825994688474073793795001448e-86]
```

(continues on next page)

(continued from previous page)

```
    gpm:  6.434446986835036147673690216839611210760474476543278533983009658879482599468847407379379498 6e-86
    apm: [6.434446986835036147673690216839611210760474476543278533983009658879482599468847407379379508e-86 +/- 3.02e-
↪176]
 math53:  5.82076609134674E-11
  sreal:  0.03125
  dreal:  5.82076609134674E-11
  ereal:  2.8421709430404007435e-14
  qreal:  5.048709793414475554635062817809 83e-29
  oreal:  2.373891936439949686868310567390489288555241458404986241569944997707252 1e-66
  mreal:  2.573778794734014459069476086735844484304189790617311413593203863551793039787538962951751 8E-85
 sflint:  0.03125
 dflint:  5.82076609134674E-11
 eflint:  2.8421709430404007435e-14
 qflint:  5.048709793414475554635062817809 83e-29
 oflint:  2.373891936439949686868310567390489288555241458404986241569944997707252 1e-66
 mflint:  2.573778794734014459069476086735844484304189790617311413593203863551793039787538962951751 8E-85
 aflint: [2.573778794734014459069476086735844484304189790617311413593203863551793039787538962951751 80e-85 +/- 5.75e-
↪176]
```

2.7.3 Largest representable number

`ctx.`**`maxvalue`**`()`

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns the largest representable number for the given data type.

See also: https://docs.python.org/3/library/sys.html#sys.float_info

An example in Python

```
>>> from xlcalcnet import *
>>> gui.setdps(40)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.maxvalue()))
    fpm:  1.79769313486232E+308
    mpm:  2.098578716467387692404358116883839070638e+323228496
    dpm:  9E+999999999999999999
    ipm: [2.098578716467387692404358116883839070638073 87e+323228496,
          2.098578716467387692404358116883839070638097 97e+323228496]
    gpm:  2.098578716467387692404358116883839070638e+323228496
    apm: [2.098578716467387692404358116883839070638e+323228496 +/- 9.81e+323228455]
 math53:  1.79769313486232E+308
  sreal:  3.402823E+38
  dreal:  1.79769313486232E+308
  ereal:  1.189731495357231765e+4932
  qreal:  1.189731495357231765085759326628 01e+4932
  oreal:  1.611325717485760473619572118452005010644023874549669517476371250496071 8e+78913
  mreal:  2.098578716467387692404358116883839070638E+323228496
 sflint:  3.402823E+38
 dflint:  1.79769313486232E+308
 eflint:  1.189731495357231765e+4932
 qflint:  1.189731495357231765085759326628 01e+4932
 oflint:  1.611325717485760473619572118452005010644023874549669517476371250496071 8e+78913
 mflint:  2.098578716467387692404358116883839070638E+323228496
 aflint: [2.098578716467387692404358116883839070638e+323228496 +/- 2.88e+323228456]
```

2.7.4 Lowest representable number

`ctx.`**`lowestvalue`**`()`

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns the lowest representable number for the given data type.

An example in Python

```
>>> from xlcalcnet import *
>>> gui.setdps(40)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.lowestvalue()))
    fpm:  -1.79769313486232E+308
    mpm:  -2.0985787164673876924043581168838390706380 7797e+323228496
    dpm:  -9E+999999999999999999
    ipm: [-2.0985787164673876924043581168838390706380 9797e+323228496,
          -2.0985787164673876924043581168838390706380 7387e+323228496]
    gpm:  -2.0985787164673876924043581168838390706380 8e+323228496
    apm: [-2.0985787164673876924043581168838390706380 8e+323228496 +/- 9.81e+323228455]
 math53:  -1.79769313486232E+308
  sreal:  -3.402823E+38
  dreal:  -1.79769313486232E+308
  ereal:  -1.189731495357231765e+4932
  qreal:  -1.189731495357231765085759326628 01e+4932
  oreal:  -1.611325717485760473619572118452005010644023874549669517476371250496 0718e+78913
  mreal:  -2.0985787164673876924043581168838390706380 8E+323228496
 sflint:  -3.402823E+38
 dflint:  -1.79769313486232E+308
 eflint:  -1.189731495357231765e+4932
 qflint:  -1.189731495357231765085759326628 01e+4932
 oflint:  -1.611325717485760473619572118452005010644023874549669517476371250496 0718e+78913
 mflint:  -2.0985787164673876924043581168838390706380 8E+323228496
 aflint: [-2.0985787164673876924043581168838390706380 8e+323228496 +/- 2.88e+323228456]
```

2.7.5 Smallest representable positive number

`ctx.`**`minposvalue`**`()`

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

See also: https://docs.python.org/3/library/sys.html#sys.float_info

Returns the smallest representable positive number for the given data type.

An example in Python

```
>>> from xlcalcnet import *
>>> gui.setdps(40)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.minposvalue()))
    fpm:  2.2250738585072E-308
    mpm:  2.3825649048879510732161697817326745204 1516878e-323228497
    dpm:  9E-999999999999999999
    ipm: [2.3825649048879510732161697817326745204 1516878e-323228497,
          2.3825649048879510732161697817326745204 1519613e-323228497]
    gpm:  2.3825649048879510732161697817326745204 1502e-323228496
    apm: [2.3825649048879510732161697817326745204 1516878e-323228497 +/- 2.51e-323228537]
 math53:  2.2250738585072E-308
  sreal:  1.175494E-38
  dreal:  2.2250738585072E-308
  ereal:  3.362103143112093506 2626778173217 5e-4932
  qreal:  3.362103143112093506 2626778173217 5e-4932
  oreal:  2.4824279514643497882993282229138717236776877060796468692709532979137876e-78913
  mreal:  2.3825649048879510732161697817326745204 15E-323228497
 sflint:  1.175494E-38
 dflint:  2.2250738585072E-308
 eflint:  3.362103143112093506 2626778173217 5e-4932
 qflint:  3.362103143112093506 2626778173217 5e-4932
 oflint:  2.4824279514643497882993282229138717236776877060796468692709532979137876e-78913
 mflint:  2.3825649048879510732161697817326745204 15E-323228497
 aflint: [2.3825649048879510732161697817326745204 1516878e-323228497 +/- 1.97e-323228537]
```

2.7.6 Next representable floating point number: $\mathrm{nextafter}(x, y)$

`ctx.`**`nextafter`**(x, y)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

See also: https://docs.python.org/3/library/math.html#math.nextafter

Returns the next representable floating point number before x in the direction of y.

See also: https://en.cppreference.com/w/cpp/numeric/math/nextafter

An example in Python

```
>>> from xlcalcnet import *
>>> x = 500000.110; y = 2.7; gui.setdps(90)
>>> or ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.nextafter(x, y)))
    fpm:  500000.11
    mpm:  500000.11
    dpm:  500000.109999999999999999999999999999999999999999999999999999999999999999999999999999999999999
    ipm: [500000.109999999999999999999999999999999999999999999999999999999999999999999999999999999981469,
          500000.109999999999999999999999999999999999999999999999999999999999999999999999999999999994338]
    gpm:  500000.109999999999999999999999999999999999999999999999999999999999999999999999999999999999994
    apm: [500000.110000000000000000000000000000000000000000000000000000000000000000000000000000000000000 +/- 1.86e-85]
 math53:  500000.11
  sreal:  500000.1
  dreal:  500000.11
  ereal:  500000.10999999999999
  qreal:  500000.11
  oreal:  500000.11
  mreal:  500000.11
 sflint:  500000.1
 dflint:  500000.11
 eflint:  500000.10999999999999
 qflint:  500000.11
 oflint:  500000.11
 mflint:  500000.11
 aflint: [500000.110000000000000000000000000000000000000000000000000000000000000000000000000000000000000 +/- 1.86e-85]
```

2.8 Mathematical Constants

2.8.1 Degree

property ctx.**degree**

where ctx is math53, ctxboost or ctxflint.

Returns one degree of angle, $1^\circ = \pi/180$. See also Wikipedia [1269], MathWorld [898], Mpmath [603], Mpmath [707], Mpmath [700].

An example in Python

```
>>> from xlcalcnet import *
>>> gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.zero))
    fpm:  0.0174532925199433
    mpm:  0.01745329251994329576923690768488612713442871888541725456097191440171009114603449443682241 57
    dpm:  0.01745329251994329576923690768488612713442871888541725456097191440171009114603449443682241 57
    ipm: [0.01745329251994329576923690768488612713442871888541725456097191440171009114603449443682241 5699145,
          0.01745329251994329576923690768488612713442871888541725456097191440171009114603449443682241 570298]
    gpm:  0.01745329251994329576923690768488612713442871888541725456097191440171009114603449443682241 5695
    apm: [0.01745329251994329576923690768488612713442871888541725456097191440171009114603449443682241 57 +/- 9.90e-93]
 math53:  0.0174532925199433
  sreal:  0.01745329
  dreal:  0.0174532925199433
  ereal:  0.017453292519943295769
  qreal:  0.017453292519943295769236907684886
  oreal:  0.01745329251994329576923690768488612713442871888541725456097191440171009 1
  mreal:  0.01745329251994329576923690768488612713442871888541725456097191440171009114603449443682241 57
 sflint:  0.01745329
 dflint:  0.0174532925199433
 eflint:  0.017453292519943295769
 qflint:  0.017453292519943295769236907684886
 oflint:  0.01745329251994329576923690768488612713442871888541725456097191440171009 1
 mflint:  0.01745329251994329576923690768488612713442871888541725456097191440171009114603449443682241 57
 aflint: [0.01745329251994329576923690768488612713442871888541725456097191440171009114603449443682241 57 +/- 4.09e-92]
```

2.8.2 Golden ratio phi

property ctx.**phi**

where ctx is math53, ctxboost or ctxflint.

Returns the golden ratio $\phi = (1 + \sqrt{5})/2$. See also Wikipedia [1276], MathWorld [901], Mpmath [610].

An example in Python

```
>>> from xlcalcnet import *
>>> gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.phi))
    fpm:  1.61803398874989
    mpm:  1.6180339887498948482045868343656381177203091798057628621354486227052604628189024497072072
    dpm:  1.6180339887498948482045868343656381177203091798057628621354486227052604628189024497072072 0
    ipm: [1.6180339887498948482045868343656381177203091798057628621354486227052604628189024497072072 041132,
          1.6180339887498948482045868343656381177203091798057628621354486227052604628189024497072072 043587]
    gpm:  1.6180339887498948482045868343656381177203091798057628621354486227052604628189024497072072 041
    apm: [1.6180339887498948482045868343656381177203091798057628621354486227052604628189024497072072 0 +/- 4.36e-90]
 math53:  1.61803398874989
  sreal:  1.618034
  dreal:  1.61803398874989
  ereal:  1.6180339887498948482
  qreal:  1.618033988749894848204586834365 64
  oreal:  1.6180339887498948482045868343656381177203091798057628621354486227052605
  mreal:  1.6180339887498948482045868343656381177203091798057628621354486227052604628189024497072072
```

(continues on next page)

(continued from previous page)

```
 sflint:  1.618034
 dflint:  1.61803398874989
 eflint:  1.6180339887498948482
 qflint:  1.618033988749894848204586834365638117720309179805762862135448622705260462818902449707207 20
 oflint:  1.618033988749894848204586834365638117720309179805762862135448622705260462818902449707207 20
 mflint:  1.618033988749894848204586834365638117720309179805762862135448622705260462818902449707207 20
 aflint: [1.618033988749894848204586834365638117720309179805762862135448622705260462818902449707207 20 +/- 4.61e-90]
```

2.8.3 Natural logarithm of 2

property ctx.**ln2**

where ctx is math53, ctxboost or ctxflint.

Returns the logarithm of 2. See also Wikipedia [1260], MathWorld [906].

An example in Python

```
>>> from xlcalcnet import *
>>> gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.ln2))
    fpm:  0.693147180559945
    mpm:  0.693147180559945309417232121458176568075500134360255254120680009493393621969694715605863327
    dpm:  0.693147180559945309417232121458176568075500134360255254120680009493393621969694715605863327
    ipm: [0.693147180559945309417232121458176568075500134360255254120680009493393621969694715605863327,
          0.693147180559945309417232121458176568075500134360255254120680009493393621969694715605863327]
    gpm:  0.693147180559945309417232121458176568075500134360255254120680009493393621969694715605863327
    apm: [0.693147180559945309417232121458176568075500134360255254120680009493393621969694715605863327 +/- 6.78e-92]
 math53:  0.693147180559945
  sreal:  0.6931472
  dreal:  0.693147180559945
  ereal:  0.6931471805599453
  qreal:  0.693147180559945309417232121458177
  oreal:  0.693147180559945309417232121458176568075500134360255254120680009493393621
  mreal:  0.693147180559945309417232121458176568075500134360255254120680009493393621969694715605863327
 sflint:  0.6931472
 dflint:  0.693147180559945
 eflint:  0.6931471805599453
 qflint:  0.693147180559945309417232121458177
 oflint:  0.693147180559945309417232121458176568075500134360255254120680009493393621
 mflint:  0.693147180559945309417232121458176568075500134360255254120680009493393621969694715605863327
 aflint: [0.693147180559945309417232121458176568075500134360255254120680009493393621969694715605863327 +/- 3.75e-91]
```

2.8.4 Natural logarithm of 10

property ctx.**ln10**

where ctx is math53, ctxboost or ctxflint.

Returns the logarithm of 10. See also MathWorld [905].

An example in Python

```
>>> from xlcalcnet import *
>>> gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.ln10))
    fpm:  2.30258509299405
    mpm:  2.302585092994045684017991454684364207601101488628772976033327900967572609677352480235997 21
    dpm:  2.302585092994045684017991454684364207601101488628772976033327900967572609677352480235997 21
    ipm: [2.302585092994045684017991454684364207601101488628772976033327900967572609677352480235997 2050818,
          2.302585092994045684017991454684364207601101488628772976033327900967572609677352480235997 2055727]
    gpm:  2.302585092994045684017991454684364207601101488628772976033327900967572609677352480235997 2051
    apm: [2.302585092994045684017991454684364207601101488628772976033327900967572609677352480235997 21 +/- 5.41e-90]
 math53:  2.30258509299405
```

(continues on next page)

(continued from previous page)

```
  sreal:  2.302585
  dreal:  2.30258509299405
  ereal:  2.302585092994045684
  qreal:  2.30258509299404568401799145468436
  oreal:  2.30258509299404568401799145468436420760110148862877297603332790096757260967735248023599721
  mreal:  2.30258509299404568401799145468436420760110148862877297603332790096757260967735248023599721
 sflint:  2.302585
 dflint:  2.30258509299405
 eflint:  2.302585092994045684
 qflint:  2.30258509299404568401799145468436
 oflint:  2.30258509299404568401799145468436420760110148862877297603332790096757260967735248023599721
 mflint:  2.30258509299404568401799145468436420760110148862877297603332790096757260967735248023599721
 aflint: [2.30258509299404568401799145468436420760110148862877297603332790096757260967735248023599720 +/- 6.07e-90]
```

2.8.5 Pi (π)

property `ctx.pi`

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns the constant pi. See also Wikipedia [1261], MathWorld [907], Mpmath [615].

An example in Python

```
>>> from xlcalcnet import *
>>> gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.pi))
    fpm:  3.14159265358979
    mpm:  3.14159265358979323846264338327950288419716939937510582097494459230781640628620899862803483
    dpm:  3.14159265358979323846264338327950288419716939937510582097494459230781640628620899862803483
    ipm: [3.14159265358979323846264338327950288419716939937510582097494459230781640628620899862803483
          3.14159265358979323846264338327950288419716939937510582097494459230781640628620899862803482
    gpm:  3.14159265358979323846264338327950288419716939937510582097494459230781640628620899862803483
    apm: [3.14159265358979323846264338327950288419716939937510582097494459230781640628620899862803483 +/- 4.91e-90]
 math53:  3.14159265358979
  sreal:  3.141593
  dreal:  3.14159265358979
  ereal:  3.1415926535897932385
  qreal:  3.14159265358979323846264338327795
  oreal:  3.14159265358979323846264338327950288419716939937510582097494459230781640628620899862803482
  mreal:  3.14159265358979323846264338327950288419716939937510582097494459230781640628620899862803482
 sflint:  3.141593
 dflint:  3.14159265358979
 eflint:  3.1415926535897932385
 qflint:  3.14159265358979323846264338327795
 oflint:  3.14159265358979323846264338327950288419716939937510582097494459230781640628620899862803482
 mflint:  3.14159265358979323846264338327950288419716939937510582097494459230781640628620899862803482
 aflint: [3.14159265358979323846264338327950288419716939937510582097494459230781640628620899862803482 +/- 5.84e-90]
```

2.8.6 Euler e

property `ctx.e`

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns the constant const_e. See also Wikipedia [1265], MathWorld [908], Mpmath [600].

An example in Python

```
>>> from xlcalcnet import *
>>> gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.e))
    fpm:  2.71828182845905
    mpm:  2.71828182845904523536028747135266249775724709369995957496696762772407663035354759457138218
```

(continues on next page)

(continued from previous page)

```
    dpm:  2.71828182845904523536028747135266249775724709369995957496696762772407663035354759457138218
    ipm: [2.71828182845904523536028747135266249775724709369995957496696762772407663035354759457138218 +/- 2.37e-90]
 math53:  2.71828182845905
  sreal:  2.718282
  dreal:  2.71828182845905
  ereal:  2.7182818284590452354
  qreal:  2.71828182845904523536028747135266
  oreal:  2.71828182845904523536028747135266249775724709369995957496696762772407663035354759457138218
  mreal:  2.71828182845904523536028747135266249775724709369995957496696762772407663035354759457138218
 sflint:  2.718282
 dflint:  2.71828182845905
 eflint:  2.7182818284590452354
 qflint:  2.71828182845904523536028747135266
 oflint:  2.71828182845904523536028747135266249775724709369995957496696762772407663035354759457138218
 mflint:  2.71828182845904523536028747135266249775724709369995957496696762772407663035354759457138218
 aflint: [2.71828182845904523536028747135266249775724709369995957496696762772407663035354759457138218 +/- 4.82e-90]
```

2.8.7 Euler-Mascheroni constant γ

property `ctx.egamma`

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns the Euler gamma constant. See also Wikipedia [1274], MathWorld [899], Mpmath [608].

An example in Python

```
>>> from xlcalcnet import *
>>> gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.egamma))
    fpm:  0.577215664901533
    mpm:  0.57721566490153286060651209008240243104215933593992359880576723488486772677766467093694706 3
    dpm:  0.57721566490153286060651209008240243104215933593992359880576723488486772677766467093694706 3
    ipm: [0.57721566490153286060651209008240243104215933593992359880576723488486772677766467093694706323219,
          0.57721566490153286060651209008240243104215933593992359880576723488486772677766467093694706335492]
    gpm:  0.57721566490153286060651209008240243104215933593992359880576723488486772677766467093694706323
    apm: [0.57721566490153286060651209008240243104215933593992359880576723488486772677766467093694706 3 +/- 2.94e-91]
 math53:  0.577215664901533
  sreal:  0.5772157
  dreal:  0.577215664901533
  ereal:  0.57721566490153286062
  qreal:  0.57721566490153286060651209008240 2
  oreal:  0.57721566490153286060651209008240243104215933593992359880576723488486773
  mreal:  0.57721566490153286060651209008240243104215933593992359880576723488486772677766467093694706 3
 sflint:  0.5772157
 dflint:  0.577215664901533
 eflint:  0.57721566490153286062
 qflint:  0.57721566490153286060651209008240 2
 oflint:  0.57721566490153286060651209008240243104215933593992359880576723488486773
 mflint:  0.57721566490153286060651209008240243104215933593992359880576723488486772677766467093694706 3
 aflint: [0.57721566490153286060651209008240243104215933593992359880576723488486772677766467093694706 3 +/- 7.24e-91]
```

2.8.8 Apéry's constant

property `ctx.apery`

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Represents Apery's constant. See also Wikipedia [1266], MathWorld [893], Mpmath [598].

It is an irrational number approximately equal to 1.2020569 given by

$$\zeta(3) = \sum_{k=1}^{\infty} \frac{1}{k^3}.$$

An example in Python

```
>>> from xlcalcnet import *
>>> gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.apery))
    fpm:  1.20205690315959
    mpm:  1.202056903159594285399738161511449990764986292340498881792271555341838205786313090186455 87
    dpm:  1.202056903159594285399738161511449990764986292340498881792271555341838205786313090186455 87
    ipm: [1.202056903159594285399738161511449990764986292340498881792271555341838205786313090186455 8697772,
          1.202056903159594285399738161511449990764986292340498881792271555341838205786313090186455 8700227]
    gpm:  1.20205690315959428539973816151144999076498629234049888179227155534183820578631309018645 58737
    apm: [1.202056903159594285399738161511449990764986292340498881792271555341838205786313090186455 87 +/- 3.71e-90]
 math53:  1.20205690315959
  sreal:  1.202057
  dreal:  1.20205690315959
  ereal:  1.2020569031595942854
  qreal:  1.202056903159594285399738161511 45
  oreal:  1.202056903159594285399738161511449990764986292340498881792271555341838 2
  mreal:  1.202056903159594285399738161511449990764986292340498881792271555341838205786313090186455 87
 sflint:  1.202057
 dflint:  1.20205690315959
 eflint:  1.2020569031595942854
 qflint:  1.202056903159594285399738161511 45
 oflint:  1.202056903159594285399738161511449990764986292340498881792271555341838 2
 mflint:  1.202056903159594285399738161511449990764986292340498881792271555341838205786313090186455 87
 aflint: [1.202056903159594285399738161511449990764986292340498881792271555341838205786313090186455 87 +/- 4.20e-90]
```

2.8.9 Catalan's constant

property `ctx.catalan`

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns the Catalan constant. See also Wikipedia [1277], MathWorld [894], Mpmath [602].

Catalan's constant $K = 0.91596559\ldots$ is given by the infinite series

$$K = \sum_{k=0}^{\infty} \frac{(-1)^k}{(2k+1)^2}.$$

An example in Python

```
>>> from xlcalcnet import *
>>> gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.catalan))
    fpm:  0.915965594177219
    mpm:  0.915965594177219015054603514932384110774149374281672134266498119621763019776254769479356513
    dpm:  0.915965594177219015054603514932384110774149374281672134266498119621763019776254769479356513
    ipm: [0.915965594177219015054603514932384110774149374281672134266498119621763019776254769479356512 84108,
          0.915965594177219015054603514932384110774149374281672134266498119621763019776254769479356512 96381]
    gpm:  0.915965594177219015054603514932384110774149374281672134266498119621763019776254769479356512 96
    apm: [0.915965594177219015054603514932384110774149374281672134266498119621763019776254769479356513 +/- 2.82e-91]
 math53:  0.915965594177219
  sreal:  0.9159656
  dreal:  0.915965594177219
  ereal:  0.9159655941772190 1505
  qreal:  0.915965594177219015054603514932384
  oreal:  0.915965594177219015054603514932384110774149374281672134266498119621763 02
  mreal:  0.915965594177219015054603514932384110774149374281672134266498119621763019776254769479356513
```

(continues on next page)

(continued from previous page)

```
 sflint:  0.9159656
 dflint:  0.915965594177219
 eflint:  0.91596559417721901505
 qflint:  0.9159655941772190150546035149323841107741493742816721342664981196217630197762547694793565 13
 oflint:  0.9159655941772190150546035149323841107741493742816721342664981196217630197762547694793565 12
 mflint:  0.9159655941772190150546035149323841107741493742816721342664981196217630197762547694793565 13
 aflint: [0.9159655941772190150546035149323841107741493742816721342664981196217630197762547694793565 12 +/- 9.64e-91]
```

2.8.10 Glaisher's constant

property ctx.**glaisher**

where ctx is math53, ctxboost or ctxflint.

Returns Glaisher's constant. See also Wikipedia [1275], MathWorld [900], Mpmath [609].

The constant is defined as $A = \exp(1/12 - \zeta'(-1))$ where $\zeta'(s)$ denotes the derivative of the Riemann zeta function.

An example in Python

```
>>> from xlcalcnet import *
>>> gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.glaisher))
    fpm:  1.28242712910062
    mpm:  1.28242712910062262368753425688697917277676889273250011920637400217404063088588264611297364917809,
          1.28242712910062262368753425688697917277676889273250011920637400217404063088588264611297364920264]
    dpm:  1.28242712910062262368753425688697917277676889273250011920637400217404063088588264611297364917809]
    ipm: [1.28242712910062262368753425688697917277676889273250011920637400217404063088588264611297364917809,
          1.28242712910062262368753425688697917277676889273250011920637400217404063088588264611297364920264]
    gpm:  1.28242712910062262368753425688697917277676889273250011920637400217404063088588264611297364901
    apm: [1.28242712910062262368753425688697917277676889273250011920637400217404063088588264611297364917809,
          1.28242712910062262368753425688697917277676889273250011920637400217404063088588264611297364920264]
 math53:  1.28242712910062
  sreal:  1.282427
  dreal:  1.28242712910062
  ereal:  1.2824271291006226369
  qreal:  1.2824271291006226368753425688697917277676889273250011920637400217404063088588264611297364917809
  oreal:  1.2824271291006226368753425688697917277676889273250011920637400217404063088588264611297364920264
  mreal:  1.2824271291006226368753425688697917277676889273250011920637400217404063088588264611297364917809
 sflint:  1.282427
 dflint:  1.28242712910062
 eflint:  1.2824271291006226369
 qflint:  1.2824271291006226368753425688697917277676889273250011920637400217404063088588264611297364917809
 oflint:  1.2824271291006226368753425688697917277676889273250011920637400217404063088588264611297364920264
 mflint:  1.2824271291006226368753425688697917277676889273250011920637400217404063088588264611297364917809
 aflint: [1.2824271291006226368753425688697917277676889273250011920637400217404063088588264611297364917809,
          1.2824271291006226368753425688697917277676889273250011920637400217404063088588264611297364920264]
```

2.8.11 Khinchin's constant

property ctx.**khinchin**

where ctx is math53, ctxboost or ctxflint.

Returns Khinchin's constant. See also Wikipedia [1282], MathWorld [902], Mpmath [614].

An example in Python

```
>>> from xlcalcnet import *
>>> gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.khinchin))
    fpm:  2.68545200106531
    mpm:  2.685452001065306445309714835481795693820382293994462953051152345557218859537152002801141 17
    dpm:  2.685452001065306445309714835481795693820382293994462953051152345557218859537152002801141 17
    ipm: [2.685452001065306445309714835481795693820382293994462953051152345557218859537152002801141 1744855,
          2.685452001065306445309714835481795693820382293994462953051152345557218859537152002801141 1749764]
    gpm:  2.685452001065306445309714835481795693820382293994462953051152345557218859537152002801141 1701
```

(continues on next page)

(continued from previous page)

```
   apm: [2.685452001065306445309714835481795693820382293994462953051152345557218859537152002801141 17 +/- 4.98e-90]
math53:  2.68545200106531
 sreal:  2.685452
 dreal:  2.68545200106531
 ereal:  2.6854520010653064454
 qreal:  2.685452001065306445309714835481 8
 oreal:  2.685452001065306445309714835481795693820382293994462953051152345557218 189
 mreal:  2.685452001065306445309714835481795693820382293994462953051152345557218859537152002801141 17
sflint:  2.685452
dflint:  2.68545200106531
eflint:  2.6854520010653064454
qflint:  2.685452001065306445309714835481 8
oflint:  2.685452001065306445309714835481795693820382293994462953051152345557218 189
mflint:  2.685452001065306445309714835481795693820382293994462953051152345557218859537152002801141 17
aflint: [2.685452001065306445309714835481795693820382293994462953051152345557218859537152002801141 17 +/- 4.98e-90]
```

CHAPTER

THREE

ELEMENTARY SCALAR FUNCTIONS (REAL AND COMPLEX)

The functions in this chapter comprise the usual elementary functions, as included in the C++ standard library, and a few specializations.

The source code for the C# tests in Visual Studio is divided by real and complex modules:

The source code for the C# tests in Visual Studio using real modules can be found online in the `XlCalcNet` repository or in the corresponding local `XlCalcNet` folder in the file B03a_RealElementaryFunctions.cs,

The source code for the C# tests in Visual Studio using complex modules can be found online in the `XlCalcNet` repository or in the corresponding local `XlCalcNet` folder in the file B03b_CplxElementaryFunctions.cs,

3.1 Complex components

3.1.1 Absolute value of a real or complex number

`ctx.abs`(x)

where `ctx` is `math53`, `mathc53`, `ctxcpp` or `ctxflint`.

Returns the absolute value of x, $|x|$.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.abs(x)))
    fpm:  5.1
    mpm:  5.1
    dpm:  5.1
    ipm: [5.09999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999992145,
          5.10000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000001964]
    gpm:  5.10000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000002
    apm: [5.10000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000 +/- 1.77e-90]
 math53:  5.1
  sreal:  5.1
  dreal:  5.1
  ereal:  5.0999999999999999999
  qreal:  5.1
  oreal:  5.1
  mreal:  5.1
 sflint:  5.1
 dflint:  5.1
 eflint:  5.0999999999999999999
 qflint:  5.1
 oflint:  5.1
 mflint:  5.1
 aflint: [5.10000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000 +/- 1.58e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.abs(x)))
    fpm:  5.47813836992094
    mpm:  5.4781383699209351022648364340189282337545849763702
cmath53:  5.47813836992093
  qcplx:  5.4781383699209351022648364340189
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.abs(x))))
    fpm:  5.47813836992094
    mpm:  5.47813836992093510226483643401892823375458497637021084486761170937337176722073409530758203
    dpm:  5.47813836992093510226483643401892823375458497637021084486761170937337176722073409530758203
    ipm: [5.47813836992093510226483643401892823375458497637021084486761170937337176722073409530758203275820327435,
          5.47813836992093510226483643401892823375458497637021084486761170937337176722073409530758203275820347071]
    gpm:  5.4781383699209351022648364340189282337545849763702108448676117093733717672207340953075820347
    apm: [5.47813836992093510226483643401892823375458497637021084486761170937337176722073409530758203 +/- 4.67e-90]
cmath53:  5.47813836992093
  scplx:  5.478138
  dcplx:  5.47813836992093
  ecplx:  5.4781383699209351022
  qcplx:  5.4781383699209351022648364340189
  ocplx:  5.47813836992093510226483643401892823375458497637021084486761170937337176722073409530758203
  mcplx:  5.47813836992093510226483643401892823375458497637021084486761170937337176722073409530758203
sflintc:  5.478138
dflintc:  5.47813836992093
eflintc:  5.4781383699209351022
qflintc:  5.4781383699209351022648364340189
oflintc:  5.47813836992093510226483643401892823375458497637021084486761170937337176722073409530758203
mflintc:  5.47813836992093510226483643401892823375458497637021084486761170937337176722073409530758203
aflintc: [5.47813836992093510226483643401892823375458497637021084486761170937337176722073409530758203 +/- 6.52e-90]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.abs(x))))
    fpm:  0
    mpm:  0.0
    dpm:  0
    ipm: [0.0,
          0.0]
    gpm:  0.0
    apm: 0
cmath53:  0
  scplx:  0
  dcplx:  0
  ecplx:  0
  qcplx:  0
  ocplx:  0
  mcplx:  0
sflintc:  0
dflintc:  0
eflintc:  0
qflintc:  0
oflintc:  0
mflintc:  0
aflintc:  0
```

`ctx.fabs(`*x*`)`

where `ctx` is `math53`, `mathc53` or `ctxcpp`. This is an alias of `ctx.abs(x)`.

3.1.2 Sign of a real or complex number

`ctx.sign(x)`

where `ctx` is `math53`, `mathc53` or `ctxcpp`.

Returns the sign of x, defined as $\text{sign}(x) = x/|x|$ (with the special case $\text{sign}(0) = 0$):

See also: https://en.wikipedia.org/wiki/Sign_function

Note that the sign function is also defined for complex numbers, for which it gives the projection onto the unit circle:

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.sign(x)))
    fpm:  -1
    mpm:  -1.0
    dpm:  -1
    ipm: [-1.0,
          -1.0]
    gpm:  -1.0
    apm: [-1.000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000 +/- 3.86e-91]
 math53:  -1
  sreal:  -1
  dreal:  -1
  ereal:  -1
  qreal:  -1
  oreal:  -1
  mreal:  -1
 sflint:  -1
 dflint:  -1
 eflint:  -1
 qflint:  -1
 oflint:  -1
 mflint:  -1
 aflint:  -1.000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.sign(x)))
    fpm:  (-0.930973198487063, 0.365087528818456)
    mpm:  (-0.93097319848706327962514714473497280880201210861339804427940085697448170652534967964240814371239, 0.36508752881845618808829299793528345443216161122094)
cmath53:  (-0.930973198487063, 0.365087528818456)
  qcplx:  (-0.93097319848706327962514714473497, 0.36508752881845618808829299793528345443216161122094)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.sign(x))))
    fpm:  -0.930973198487063
    mpm:  -0.930973198487063279625147144734972808802012108613398044279400856974481706525349679642408143
    dpm:  -0.930973198487063279625147144734972808802012108613398044279400856974481706525349679642408144
    ipm: [-0.930973198487063279625147144734972808802012108613398044279400856974481706525349679642408143712 39,
          -0.930973198487063279625147144734972808802012108613398044279400856974481706525349679642408142485 11]
    gpm:  -0.930973198487063279625147144734972808802012108613398044279400856974481706525349679642408142 98
    apm: [-0.930973198487063279625147144734972808802012108613398044279400856974481706525349679642408143 +/- 7.27e-91]
cmath53:  -0.930973198487063
  scplx:  -0.9309732
  dcplx:  -0.930973198487063
  ecplx:  -0.93097319848706327962
  qcplx:  -0.930973198487063279625147144734973
  ocplx:  -0.93097319848706327962514714473497280880201210861339804427940085697448 17
```

(continues on next page)

(continued from previous page)

```
  mcplx:  -0.930973198487063279625147144734972808802012108613398044279400856974481706525349679642408143
sflintc:  -0.9309732
dflintc:  -0.930973198487063
eflintc:  -0.93097319848706327962
qflintc:  -0.930973198487063279625147144734973
oflintc:  -0.9309731984870632796251471447349728088020121086133980442794008569744817
mflintc:  -0.930973198487063279625147144734972808802012108613398044279400856974481706525349679642408143
aflintc: [-0.93097319848706327962514714473497280880201210861339804427940085697448170652534967964240814 +/- 4.67e-90]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.sign(x))))
    fpm:  0.365087528818456
    mpm:  0.365087528818456188088292997935283454432161611220940409521333669401757531970725364565650252
    dpm:  0.365087528818456188088292997935283454432161611220940409521333669401757531970725364565650253
    ipm: [0.365087528818456188088292997935283454432161611220940409521333669401757531970725364565025196698,
          0.365087528818456188088292997935283454432161611220940409521333669401757531970725364565025245789]
    gpm:  0.365087528818456188088292997935283454432161611220940409521333669401757531970725364565025215
    apm: [0.365087528818456188088292997935283454432161611220940409521333669401757531970725364565650252 +/- 4.64e-91]
cmath53:  0.365087528818456
  scplx:  0.3650875
  dcplx:  0.365087528818456
  ecplx:  0.3650875288184561881l
  qcplx:  0.365087528818456188088292997935283
  ocplx:  0.36508752881845618808829299793528345443216161122094040952133366940175753
  mcplx:  0.365087528818456188088292997935283454432161611220940409521333669401757531970725364565650252
sflintc:  0.3650875
dflintc:  0.365087528818456
eflintc:  0.3650875288184561881l
qflintc:  0.365087528818456188088292997935283
oflintc:  0.36508752881845618808829299793528345443216161122094040952133366940175753
mflintc:  0.365087528818456188088292997935283454432161611220940409521333669401757531970725364565650252
aflintc: [0.365087528818456188088292997935283454432161611220940409521333669401757531970725364565650252 +/- 8.98e-91]
```

3.1.3 Real part of a real or complex number

`ctx.`**`real`**`(`x`)`

where `ctx` is `math53`, `mathc53` or `ctxcpp`.

Returns the real part of x, $\Re(x)$.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.real(x)))
    fpm:  -5.1
    mpm:  -5.1
    dpm:  -5.1
    ipm: [-5.10000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000001964,
          -5.09999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999992145]
    gpm:  -5.10000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000002
    apm: [-5.10000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000 +/- 1.77e-90]
 math53:  -5.1
  sreal:  -5.1
  dreal:  -5.1
  ereal:  -5.0999999999999999
  qreal:  -5.1
  oreal:  -5.1
  mreal:  -5.1
 sflint:  -5.1
```

(continues on next page)

(continued from previous page)

```
 dflint:  -5.1
 eflint:  -5.0999999999999999999
 qflint:  -5.1
 oflint:  -5.1
 mflint:  -5.1
 aflint: [-5.1000000000
```

(continued from previous page)

```
dflintc:  0
eflintc:  0
qflintc:  0
oflintc:  0
mflintc:  0
aflintc:  0
```

3.1.4 Imaginary part of a real or complex number

ctx.imag(x)

where ctx is math53, mathc53 or ctxcpp.

Returns the imaginary part of x, $\Im(x)$.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.imag(x)))
    fpm:  0
    mpm:  0.0
    dpm:  0
    ipm: [0.0,
          0.0]
    gpm:  0.0
    apm: 0
 math53:  0
  sreal:  0
  dreal:  0
  ereal:  0
  qreal:  0
  oreal:  0
  mreal:  0
 sflint:  0
 dflint:  0
 eflint:  0
 qflint:  0
 oflint:  0
 mflint:  0
 aflint:  0
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.imag(x)))
    fpm:  2
    mpm:  2.0
cmath53:  2
  qcplx:  2
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.imag(x))))
    fpm:  2
    mpm:  2.0
    dpm:  2.0
    ipm: [2.0,
          2.0]
    gpm:  2.0
    apm: 2.000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000
```

(continues on next page)

(continued from previous page)

```
cmath53:  2
  scplx:  2
  dcplx:  2
  ecplx:  2
  qcplx:  2
  ocplx:  2
  mcplx:  2
sflintc:  2
dflintc:  2
eflintc:  2
qflintc:  2
oflintc:  2
mflintc:  2
aflintc:  2.0000000000
```

(continued from previous page)

```
 math53:  3.14159265358979
  sreal:  3.141593
  dreal:  3.14159265358979
  ereal:  3.1415926535897932385
  qreal:  3.1415926535897932384626433832795
  oreal:  3.1415926535897932384626433832795028841971693993751058209749445923078164
  mreal:  3.1415926535897932384626433832795028841971693993751058209749445923078164062862089986280348
 sflint:  3.141593
 dflint:  3.14159265358979
 eflint:  3.1415926535897932385
 qflint:  3.1415926535897932384626433832795
 oflint:  3.1415926535897932384626433832795028841971693993751058209749445923078164
 mflint:  3.1415926535897932384626433832795028841971693993751058209749445923078164062862089986280348
 aflint: [3.1415926535897932384626433832795028841971693993751058209749445923078164062862089986280348 +/- 5.84e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.phase(x)))
    fpm:  2.76786583362424
    mpm:  2.7678658336242397790155820717594347757896731382865
cmath53:  2.76786583362424
  qcplx:  2.767865833624239779015582071759
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.phase(x))))
    fpm:  2.76786583362424
    mpm:  2.767865833624239779015582071759434775789673138286494659524759405748981547995542878869050021
    dpm:  2.767865833624239779015582071759434775789673138286494659524759405748981547995542878869050021
    ipm: [2.767865833624239779015582071759434775789673138286494659524759405748981547995542878869050021937
          4,
          2.767865833624239779015582071759434775789673138286494659524759405748981547995542878869050022428
          3]
    gpm:  2.767865833624239779015582071759434775789673138286494659524759405748981547995542878869050021
    apm: [2.767865833624239779015582071759434775789673138286494659524759405748981547995542878869050021 +/- 2.38e-90]
cmath53:  2.76786583362424
  scplx:  2.767866
  dcplx:  2.76786583362424
  ecplx:  2.767865833624239779
  qcplx:  2.767865833624239779015582071759
  ocplx:  2.76786583362423977901558207175943477578967313828649465952475940574898154799554287886905002
  mcplx:  2.767865833624239779015582071759434775789673138286494659524759405748981547995542878869050021
sflintc:  2.767866
dflintc:  2.76786583362424
eflintc:  2.767865833624239779
qflintc:  2.767865833624239779015582071759
oflintc:  2.76786583362423977901558207175943477578967313828649465952475940574898154799554287886905002
mflintc:  2.767865833624239779015582071759434775789673138286494659524759405748981547995542878869050021
aflintc: [2.767865833624239779015582071759434775789673138286494659524759405748981547995542878869050021 +/- 2.98e-90]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.phase(x))))
    fpm:  0
    mpm:  0.0
    dpm:  0
    ipm: [0.0,
          0.0]
    gpm:  0.0
    apm: 0
```

(continues on next page)

(continued from previous page)

```
cmath53:  0
  scplx:  0
  dcplx:  0
  ecplx:  0
  qcplx:  0
  ocplx:  0
  mcplx:  0
sflintc:  0
dflintc:  0
eflintc:  0
qflintc:  0
oflintc:  0
mflintc:  0
aflintc:  0
```

3.1.6 Conjugate of a real or complex number

`ctx.conj`(x)

where `ctx` is `math53`, `mathc53` or `ctxcpp`.

Returns the complex conjugate of x, $\overline{x}$.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.conj(x)))
    fpm:  -5.1
    mpm:  -5.1
    dpm:  -5.1
    ipm: [-5.10000000000
```

(continued from previous page)

```
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.conj(x))))
    fpm:  -5.1
    mpm:  -5.1
    dpm:  -5.1
    ipm: [-5.1000000000
```

(continued from previous page)

```
   >>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ', ctx.polar(x))
   fpm:  (5.1, 3.141592653589793)
   mpm:  (mpf('5.0999999999999999999999999999999999988'), mpf('3.14159265358979323846264338327950288847'))
   dpm:  (Decimal('5.1'), Decimal('3.14159265358979323846264338327950029'))
   ipm:  (mpi('5.0999999999999999999999999999999999988', '5.1000000000000000000000000000000000048'), mpi('3.
↪14159265358979323846264338327950288817', '3.14159265358979323846264338327950288847'))
   gpm:  (5.1, mpfr('3.14159265358979323846264338327950288847',120))
   apm:  ([5.1000000000000000000000000000000000 +/- 7.23e-36], [3.14159265358979323846264338327950029 +/- 1.68e-35])
math53:  (5.1, 3.14159265358979)
 sreal:  (5.1, 3.141593)
 dreal:  (5.1, 3.14159265358979)
 ereal:  (5.0999999999999999999, 3.1415926535897932385)
 qreal:  (5.1, 3.14159265358979323846264338327950)
 oreal:  (5.1, 3.14159265358979323846264338327950288419716939937510582097494459230781640)
 mreal:  (5.1, 3.14159265358979323846264338327950029)
sflint:  (5.1, 3.141593)
dflint:  (5.1, 3.14159265358979)
eflint:  (5.0999999999999999999, 3.1415926535897932385)
qflint:  (5.1, 3.14159265358979323846264338327950)
oflint:  (5.1, 3.14159265358979323846264338327950288419716939937510582097494459230781640)
mflint:  (5.1, 3.14159265358979323846264338327950029)
aflint:  ([5.1000000000000000000000000000000000 +/- 3.86e-35], [3.14159265358979323846264338327950029 +/- 1.83e-35])
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(35)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ',  ctx.polar(x))
    fpm:  (5.478138369920935, 2.76786583362424)
    mpm:  (mpf('5.4781383699209351022648364340189282348'), mpf('2.7678658336242397790155820717594347745'))
cmath53:  (5.47813836992093, 2.76786583362424)
  qcplx:  (5.4781383699209351022648364340189282348, 2.7678658336242397790155820717594347745)
```

An example with the same complex input as above, showing the result for all numerical data types:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(40)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ',  ctx.polar(x))
    fpm:  (5.478138369920935, 2.76786583362424)
    mpm:  (mpf('5.4781383699209351022648364340189282348'), mpf('2.7678658336242397790155820717594347745'))
    dpm:  (Decimal('5.4781383699209347715167147478545767'), Decimal('2.7678658336242397553387165016128094'))
    ipm:  (mpi('5.4781383699209351022648364340189282288', '5.4781383699209351022648364340189282409'), mpi('2.
↪7678658336242397790155820717594347745', '2.7678658336242397790155820717594347775'))
    gpm:  (5.478138369920935, mpfr('2.7678658336242397790155820717594347745',120))
    apm:  ([5.4781383699209351022648364340189282 +/- 4.06e-35], [2.7678658336242397790155820717594348 +/- 3.13e-35])
cmath53:  (5.47813836992093, 2.76786583362424)
  scplx:  (5.478138, 2.767866)
  dcplx:  (5.47813836992093, 2.76786583362424)
  ecplx:  (5.4781383699209351022, 2.767865833624239779)
  qcplx:  (5.4781383699209351022648364340189282348, 2.7678658336242397790155820717594347745)
  ocplx:  (5.4781383699209351022648364340189282337545849763702108448676117093733718, 2.
↪7678658336242397790155820717594347757896731382864946595247594057489815)
  mcplx:  (5.4781383699209351022648364340189282, 2.7678658336242397790155820717594348)
sflintc:  (5.478138, 2.767866)
dflintc:  (5.47813836992093, 2.76786583362424)
eflintc:  (5.4781383699209351022, 2.767865833624239779)
qflintc:  (5.4781383699209351022648364340189282348, 2.7678658336242397790155820717594347745)
oflintc:  (5.4781383699209351022648364340189282337545849763702108448676117093733718, 2.
↪7678658336242397790155820717594347757896731382864946595247594057489815)
mflintc:  (5.4781383699209351022648364340189282, 2.7678658336242397790155820717594348)
aflintc:  ([5.4781383699209351022648364340189282 +/- 7.45e-35], [2.7678658336242397790155820717594348 +/- 8.11e-35])
```

3.1.8 Rectangular coordinates calculated from the polar representation of a real or complex number

ctx.rect(*r*, *phi*)

where ctx is math53, mathc53 or ctxcpp.

Returns the complex number represented by polar coordinates (r, ϕ), where r and ϕ are real numbers. The result is always a complex number.

See also Mpmath [666].

An example:

```
>>> from xlcalcnet import *
>>> r = 5.1; phi = 3.1; gui.setdps(40)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.cplxctx.fmt(ctx.rect(r, phi)))
    fpm:  (-5.09558926639373, 0.212061378409781)
    mpm:  (-5.095589266393725268911117878161477940467, 0.212061378409781953892961185143032812828 6)
    dpm:  (-5.095589266393725268911117878161477940467, 0.212061378409781953892961185143032812828 6)
    ipm: ([-5.095589266393724932781840339077094930699685 25, -5.095589266393724932781840339077094930699685 25], [0.
↪212061378409781486541300158459371296141849461, 0.212061378409781486541300158459371296141849461])
    gpm:  (-5.095589266393725268911117878161477940466 87, 0.212061378409781953892961185143032812828623)
    apm: ([-5.095589266393725268911117878161477940467 +/- 4.78e-40], [0.212061378409781953892961185143032812829 +/- 6.
↪28e-40])
 math53:  (-5.09558926639373, 0.212061378409781)
  sreal:  (-5.095589, 0.2120619)
  dreal:  (-5.09558926639373, 0.212061378409781)
  ereal:  (-5.0955892663937252685, 0.2120613784097819543)
  qreal:  (-5.095589266393725268911117878161 48, 0.212061378409781953892961185143032)
  oreal:  (-5.095589266393725268911117878161477940466872516734507992078051511 0023443, 0.
↪212061378409781953892961185143032812828528457115414428304845903906011 19)
  mreal:  (-5.095589266393725268911117878161477940467, 0.212061378409781953892961185143032812828 1)
 sflint:  (-5.095589, 0.2120619)
 dflint:  (-5.09558926639373, 0.212061378409781)
 eflint:  (-5.0955892663937252685, 0.21206137840978195434)
 qflint:  (-5.095589266393725268911117878161 48, 0.212061378409781953892961185143032)
 oflint:  (-5.095589266393725268911117878161477940466872516734507992078051511 0023443, 0.
↪212061378409781953892961185143032812828528457115414428304845903906011 19)
 mflint:  (-5.095589266393725268911117878161477940467, 0.212061378409781953892961185143032812828 1)
 aflint: ([-5.095589266393725268911117878161477940 47 +/- 5.67e-39], [0.212061378409781953892961185143032812828 +/- 5.
↪58e-40])
```

3.1.9 Imaginary One

property ctx.**onej**

where ctx is math53, ctxboost or ctxflint.

Returns the imaginary unit.

In extended precision (32 bit version of xlcalcnet)

```
>>> from xlcalcnet import math53
>>> math53.ConstDegree()
ereal('1.7453292519943295769E-2')
```

In double precision (64 bit version of xlcalcnet)

```
>>> from xlcalcnet import math53
>>> math53.ConstDegree()
0.0174532925199433
```

3.2 Roots and quadratic, cubic, and quartic equations

3.2.1 Square root, $\mathrm{sqrt}(x) = \sqrt{x}$

`ctx.sqrt(x)`

where `ctx` is `math53`, `mathc53`, `ctxcpp`, `ctxflint`.

Returns the principal square root of x, $\sqrt{x}$. See also Wikipedia [1241], MathWorld [853], Flint [741], Ehrhardt [295] (4.1.19), Mpmath [556].

For positive real numbers, the principal root is simply the positive square root. For arbitrary complex numbers, the principal square root is defined to satisfy $\sqrt{x} = \exp(\log(x)/2)$. The function thus has a branch cut along the negative half real axis.

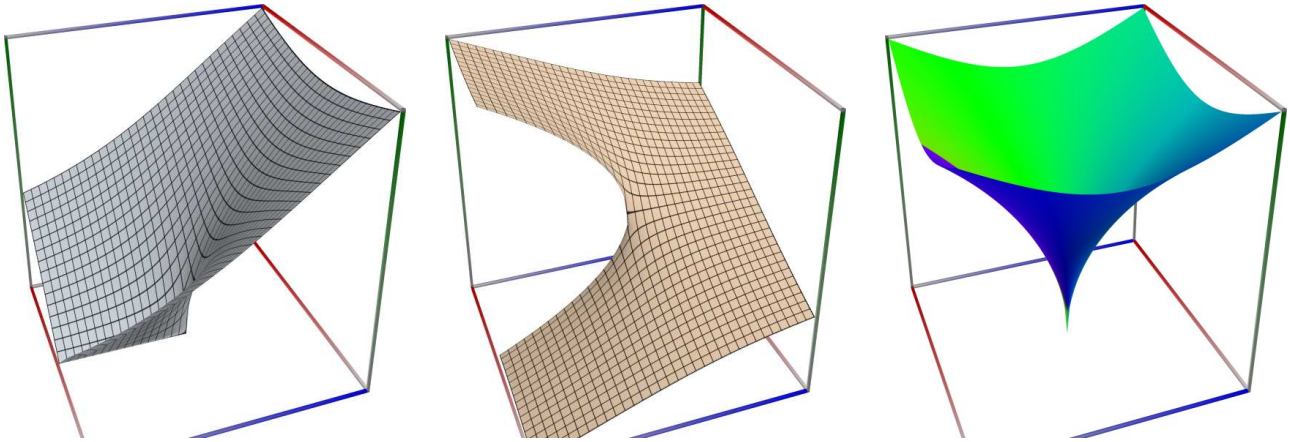

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.sqrt(x)))
    fpm:  2.25831795812724
    mpm:  2.258317958127242984972049985969115395359970403973902639069460273288140331060576319534966 88
    dpm:  2.258317958127242984972049985969115395359970403973902639069460273288140331060576319534966 88
    ipm: [2.258317958127242984972049985969115395359970403973902639069460273288140331060576319534966 88820745,
          2.258317958127242984972049985969115395359970403973902639069460273288140331060576319534966 88825654]
    gpm:  2.258317958127242984972049985969115395359970403973902639069460273288140331060576319534966 8826
    apm: [2.258317958127242984972049985969115395359970403973902639069460273288140331060576319534966 88 +/- 2.79e-90]
 math53:  2.25831795812724
  sreal:  2.258318
  dreal:  2.25831795812724
  ereal:  2.2583179581272429849
  qreal:  2.258317958127242984972049985969 12
  oreal:  2.258317958127242984972049985969115395359970403973902639069460273288140 3
  mreal:  2.258317958127242984972049985969115395359970403973902639069460273288140331060576319534966 88
 sflint:  2.258318
 dflint:  2.25831795812724
 eflint:  2.2583179581272429849
 qflint:  2.258317958127242984972049985969 12
 oflint:  2.258317958127242984972049985969115395359970403973902639069460273288140 3
 mflint:  2.258317958127242984972049985969115395359970403973902639069460273288140331060576319534966 88
 aflint: [2.258317958127242984972049985969115395359970403973902639069460273288140331060576319534966 88 +/- 3.73e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.sqrt(x)))
    fpm:  (0.434820865369255, 2.29979764000237)
    mpm:  (0.434820865369254734356030911907966, 2.299797640002369328271076189836643191788)
cmath53:  (0.434820865369255, 2.29979764000237)
  qcplx:  (0.434820865369254734356030911907966, 2.299797640002369328271076189836643191788)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.sqrt(x))))
    fpm:  0.434820865369255
    mpm:  0.434820865369254734356030911907966009641496430039831655959511936242419788626030484795959202
    dpm:  0.434820865369254734356030911907966009641496430039831655959511936242419788626030484795959202
    ipm: [0.434820865369254734356030911907966009641496430039831655959511936242419788626030484795959202207246,
          0.434820865369254734356030911907966009641496430039831655959511936242419788626030484795959202219519]
    gpm:  0.434820865369254734356030911907966009641496430039831655959511936242419788626030484795959202213
    apm: [0.434820865369254734356030911907966009641496430039831655959511936242419788626030484795959202 +/- 2.42e-91]
cmath53:  0.434820865369255
  scplx:  0.4348209
  dcplx:  0.434820865369255
  ecplx:  0.43482086536925473435
  qcplx:  0.434820865369254734356030911907966
  ocplx:  0.434820865369254734356030911907966009641496430039831655959511936242419788626030484795959202
  mcplx:  0.434820865369254734356030911907966009641496430039831655959511936242419788626030484795959202
sflintc:  0.4348209
dflintc:  0.434820865369255
eflintc:  0.43482086536925473435
qflintc:  0.434820865369254734356030911907966
oflintc:  0.434820865369254734356030911907966009641496430039831655959511936242419788626030484795959202
mflintc:  0.434820865369254734356030911907966009641496430039831655959511936242419788626030484795959202
aflintc: [0.434820865369254734356030911907966009641496430039831655959511936242419788626030484795959202 +/- 3.56e-91]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.sqrt(x))))
    fpm:  2.29979764000237
    mpm:  2.299797640002369328271076189836643191787600851527121781738149371906939483002316990761022248
    dpm:  2.299797640002369328271076189836643191787600851527121781738149371906939483002316990761022248
    ipm: [2.299797640002369328271076189836643191787600851527121781738149371906939483002316990761022476236,
          2.299797640002369328271076189836643191787600851527121781738149371906939483002316990761022476726 9]
    gpm:  2.29979764000236932827107618983664319178760085152712178173814937190693948300231699076102247 67
    apm: [2.299797640002369328271076189836643191787600851527121781738149371906939483002316990761022248 +/- 4.50e-90]
cmath53:  2.29979764000237
  scplx:  2.299798
  dcplx:  2.29979764000237
  ecplx:  2.2997976400023693283
  qcplx:  2.299797640002369328271076189836643
  ocplx:  2.29979764000236932827107618983664319178760085152712178173814937190693950
  mcplx:  2.299797640002369328271076189836643191787600851527121781738149371906939483002316990761022248
sflintc:  2.299798
dflintc:  2.29979764000237
eflintc:  2.2997976400023693283
qflintc:  2.299797640002369328271076189836643
oflintc:  2.29979764000236932827107618983664319178760085152712178173814937190693950
mflintc:  2.299797640002369328271076189836643191787600851527121781738149371906939483002316990761022248
aflintc: [2.299797640002369328271076189836643191787600851527121781738149371906939483002316990761022247 +/- 7.05e-90]
```

3.2.2 Reciprocal square root, $\mathrm{rsqrt}(x) = 1/\sqrt{x}$

`ctx.rsqrt(x)`

where `ctx` is `math53`, `mathc53`, `ctxcpp`, `ctxflint`.

Returns the reciprocal of the principal square root of x, $1/\sqrt{x}$. See also Wikipedia [1241], MathWorld [853], Flint [741], Ehrhardt [295] (4.1.19), Mpmath [556].

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.rsqrt(x)))
    fpm:  0.442807442770048
    mpm:  0.44280744277004764411216666391551282261960203999488287040577652417414516295305418030097389841589,
          0.44280744277004764411216666391551282261960203999488287040577652417414516295305418030097389853862]
    gpm:  0.44280744277004764411216666391551282261960203999488287040577652417414516295305418030097389842
    apm: [0.44280744277004764411216666391551282261960203999488287040577652417414516295305418030097389841589,
          0.44280744277004764411216666391551282261960203999488287040577652417414516295305418030097389853862]
 math53:  0.442807442770048
  sreal:  0.4428074
  dreal:  0.442807442770048
  ereal:  0.44280744277004764414
  qreal:  0.4428074427700476441121666639155128226196020399948828704057765241741451629530541803009738984
  oreal:  0.4428074427700476441121666639155128226196020399948828704057765241741451629530541803009738993
 sflint:  0.4428074
 dflint:  0.442807442770048
 eflint:  0.44280744277004764411216666391551328226196020399948828704057765241741451629530541803009738984
 qflint:  0.4428074427700476441121666639155128226196020399948828704057765241741451629530541803009738993
 oflint:  0.4428074427700476441121666639155128226196020399948828704057765241741451629530541803009738993
 mflint:  0.4428074427700476441121666639155128226196020399948828704057765241741451629530541803009738993
 aflint: [0.4428074427700476441121666639155128226196020399948828704057765241741451629530541803009738984 +/- 6.35e-91]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.rsqrt(x)))
    fpm:  (0.0793738376081819, -0.419813718585491)
    mpm:  (0.079373837608181923069856538785160271056433519155318297836813990968928292036383822361301333606501, -0.419813718585491271006149629856142)
cmath53:  (0.0793738376081819, -0.419813718585491)
  qcplx:  (0.079373837608181923069856538785160271056433519155318297836813990968928292036383822361301333606501, -0.419813718585491271006149629856142)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.rsqrt(x))))
    fpm:  0.0793738376081819
    mpm:  0.079373837608181923069856538785160271056433519155318297836813990968928292036383822361301333606501
    dpm:  0.079373837608181923069856538785160271056433519155318297836813990968928292036383822361301333606501
    ipm: [0.079373837608181923069856538785160271056433519155318297836813990968928292036383822361301333606501,
          0.079373837608181923069856538785160271056433519155318297836813990968928292036383822361301333681715]
    gpm:  0.079373837608181923069856538785160271056433519155318297836813990968928292036383822361301333620
    apm: [0.079373837608181923069856538785160271056433519155318297836813990968928292036383822361301333606501,
          0.079373837608181923069856538785160271056433519155318297836813990968928292036383822361301333681715]
cmath53:  0.0793738376081819
  scplx:  0.07937385
  dcplx:  0.0793738376081819
  ecplx:  0.07937383760818192306
  qcplx:  0.079373837608181923069856538785160271056433519155318297836813990968928292036383822361301333606501
  ocplx:  0.079373837608181923069856538785160271056433519155318297836813990968928293
  mcplx:  0.079373837608181923069856538785160271056433519155318297836813990968928292036383822361301333606501
sflintc:  0.07937384
```

(continues on next page)

(continued from previous page)

```
dflintc:  0.0793738376081819
eflintc:  0.07937383760818192307
qflintc:  0.07937383760818192306985653878516027105643351915531829783681399096892829203638382236130133
oflintc:  0.07937383760818192306985653878516027105643351915531829783681399096892829203638382236130133
mflintc:  0.07937383760818192306985653878516027105643351915531829783681399096892829203638382236130133
aflintc: [0.07937383760818192306985653878516027105643351915531829783681399096892829203638382236130133 +/- 6.01e-91]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.rsqrt(x))))
    fpm:  -0.419813718585491
    mpm:  -0.41981371858549127100614962985614169601465368886597748746363164509197703900579398941929800202969,
          -0.41981371858549127100614962985614169601465368886597748746363164509197703900579398941929800166151]
    dpm:  -0.41981371858549127100614962985614169601465368886597748746363164509197703900579398941929800202969,
          -0.41981371858549127100614962985614169601465368886597748746363164509197703900579398941929800166151]
    ipm: [-0.41981371858549127100614962985614169601465368886597748746363164509197703900579398941929800202969,
          -0.41981371858549127100614962985614169601465368886597748746363164509197703900579398941929800166151]
    gpm:  -0.41981371858549127100614962985614169601465368886597748746363164509197703900579398941929800178
    apm: [-0.41981371858549127100614962985614169601465368886597748746363164509197703900579398941929800178 +/- 4.06e-91]
cmath53:  -0.419813718585491
  scplx:  -0.4198137
  dcplx:  -0.419813718585491
  ecplx:  -0.41981371858549127
  qcplx:  -0.41981371858549127100614962985614
  ocplx:  -0.41981371858549127100614962985614169601465368886597748746363164509197704
  mcplx:  -0.41981371858549127100614962985614169601465368886597748746363164509197703900579398941929800202969,
          -0.41981371858549127100614962985614169601465368886597748746363164509197703900579398941929800166151]
sflintc:  -0.4198137
dflintc:  -0.419813718585491
eflintc:  -0.41981371858549127
qflintc:  -0.41981371858549127100614962985614
oflintc:  -0.41981371858549127100614962985614169601465368886597748746363164509197704
mflintc:  -0.41981371858549127100614962985614169601465368886597748746363164509197703900579398941929800202969,
          -0.41981371858549127100614962985614169601465368886597748746363164509197703900579398941929800166151]
aflintc: [-0.41981371858549127100614962985614169601465368886597748746363164509197703900579398941929800202969,
          -0.41981371858549127100614962985614169601465368886597748746363164509197703900579398941929800166151] +/- 2.95e-90]
```

3.2.3 Auxiliary function $\mathrm{sqrt1pm1}(x) = \sqrt{1+x} - 1$

`ctx.sqrt1pm1`(x)

where `ctx` is `math53`, `mathc53`, `ctxcpp` , `ctxboost` or `ctxflint`.

Returns $\sqrt{1+x} - 1$, accurate also for x near 0. See also Wikipedia [1241], MathWorld [853], BoostMath [92].

This is calculated as $\mathrm{sqrt1pm1}(v) = \mathrm{expm1}(\mathrm{logp1}(v)/2)$. See *log1p()* and *expm1()*.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.sqrt1pm1(x)))
    fpm:  1.46981780704569
    mpm:  1.46981780704569380590709946162877517919414492582021285822843909030286721110584522284490036
    dpm:  1.46981780704569380590709946162877517919414492582021285822843909030286721110584522284490036
    ipm: [1.46981780704569380590709946162877517919414492582021285822843909030286721110584522284490036,
          1.46981780704569380590709946162877517919414492582021285822843909030286721110584522284490036]
    gpm:  1.46981780704569380590709946162877517919414492582021285822843909030286721110584522284490036
    apm: [1.46981780704569380590709946162877517919414492582021285822843909030286721110584522284490036 +/- 1.71e-90]
 math53:  1.46981780704569
  sreal:  1.469818
  dreal:  1.46981780704569
  ereal:  1.469817807045693806
  qreal:  1.46981780704569380590709946162878
  oreal:  1.46981780704569380590709946162877517919414492582021285822843909030286721110584522284490036
  mreal:  1.72130062072631591472539664618123876917145215245485931044244199427385409302383945109261630
 sflint:  1.469818
```

(continues on next page)

(continued from previous page)

```
 dflint:  1.46981780704569
 eflint:  1.4698178070456938059
 qflint:  1.469817807045693805907099461628775179194144925820212858228439090302867 2
 oflint:  1.469817807045693805907099461628775179194144925820212858228439090302867 2
 mflint:  1.721300620726315914725396646181238769171452152454859310442441994273854093023839451092616 3
 aflint: [1.721300620726315914725396646181238769171452152454859310442441994273854093023839451092616 30 +/- 4.95e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.sqrt1pm1(x)))
    fpm:  (-0.519480546084335, 2.08108119629951)
    mpm:  (-0.519480546084335204406788158302922706613, 2.08108119629951216933881430536877528769 2)
cmath53:  (-0.519480546084335, 2.08108119629951)
  qcplx:  (-0.519480546084335204406788158302922, 2.08108119629951216933881430536877)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.sqrt1pm1(x))))
    fpm:  -0.519480546084335
    mpm:  -0.519480546084335204406788158302922706613324670393663195961212572350223143983554624013768865
    dpm:  -0.519480546084335204406788158302922706613324670393663195961212572350223143983554624013768865
    ipm: [-0.519480546084335204406788158302922706613324670393663195961212572350223143983554624013768865 47559,
          -0.519480546084335204406788158302922706613324670393663195961212572350223143983554624013768864 73923]
    gpm:  -0.519480546084335204406788158302922706613324670393663195961212572350223143983554624013768865 6
    apm: [-0.519480546084335204406788158302922706613324670393663195961212572350223143983554624013768865 +/- 6.11e-90]
cmath53:  -0.519480546084335
  scplx:  -0.5194805
  dcplx:  -0.519480546084335
  ecplx:  -0.51948054608433520446
  qcplx:  -0.519480546084335204406788158302922
  ocplx:  -0.519480546084335204406788158302922706613324670393663195961212572350223 13
  mcplx:  -0.519480546084335204406788158302922706613324670393663195961212572350223143983554624013768864
sflintc:  1.064278
dflintc:  -0.519480546084335
eflintc:  1.064278363760893973
qflintc:  1.064278363760893972953741571036
oflintc:  1.064278363760893972953741571036918325320446850097936786854549681514629083798070694044380 51
mflintc:  1.064278363760893972953741571036918325320446850097936786854549681514629083798070694044380 51
aflintc: [1.064278363760893972953741571036918325320446850097936786854549681514629083798070694044380 5 +/- 2.18e-89]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.sqrt1pm1(x))))
    fpm:  2.08108119629951
    mpm:  2.081081196299512169338814305368775287692011237283996673082404017430253931824713751938926 43
    dpm:  2.081081196299512169338814305368775287692011237283996673082404017430253931824713751938926 43
    ipm: [2.081081196299512169338814305368775287692011237283996673082404017430253931824713751938926 4273587,
          2.081081196299512169338814305368775287692011237283996673082404017430253931824713751938926 4283405]
    gpm:  2.081081196299512169338814305368775287692011237283996673082404017430253931824713751938926 4283
    apm: [2.081081196299512169338814305368775287692011237283996673082404017430253931824713751938926 43 +/- 3.91e-90]
cmath53:  2.08108119629951
  scplx:  2.081081
  dcplx:  2.08108119629951
  ecplx:  2.0810811962995121693
  qcplx:  2.081081196299512169338814305368775
  ocplx:  2.081081196299512169338814305368775287692011237283996673082404017430253 9
  mcplx:  2.081081196299512169338814305368775287692011237283996673082404017430253931824713751938926 43
sflintc:  1.405308
```

(continues on next page)

(continued from previous page)

```
dflintc:  2.08108119629951
eflintc:  1.4053075393260783915
qflintc:  1.405307539326078391479856489369832450940317751954790991749838569939923832115066414613078l9
oflintc:  1.40530753932607839147985648936983245094031775195479099174983856993992383211506641461307819
mflintc:  1.405307539326078391479856489369832450940317751954790991749838569939923832115066414613078l9
aflintc: [1.40530753932607839147985648936983245094031775195479099174983856993992383211506641461307820 +/- 2.21e-89]
```

3.2.4 Cube root, $\mathrm{cbrt}(x) = \sqrt[3]{x}$

`ctx.cbrt`(x)

where `ctx` is `math53`, `mathc53`, `ctxcpp`, `ctxboost`, `ctxflint`.

Returns the cube root of x, $x^{1/3}$. See also Wikipedia [1228], MathWorld [838], BoostMath [97], Ehrhardt [295] (4.2.17), Mpmath [540].

This function is faster and more accurate than raising to a floating-point fraction.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.cbrt(x)))
    fpm:  1.72130062072632
    mpm:  1.721300620726315914725396646181238769171452152454859310442441994273854093023839451092616 3
    dpm:  1.721300620726315914725396646181238769171452152454859310442441994273854093023839451092616 3
    ipm: [1.721300620726315914725396646181238769171452152454859310442441994273854093023839451092616 3043634,
          1.721300620726315914725396646181238769171452152454859310442441994273854093023839451092616 3048543]
    gpm:  1.721300620726315914725396646181238769171452152454859310442441994273854093023839451092616 3049
    apm: [1.721300620726315914725396646181238769171452152454859310442441994273854093023839451092616 30 +/- 4.97e-90]
 math53:  1.72130062072632
  sreal:  1.721301
  dreal:  1.72130062072632
  ereal:  1.7213006207263159147
  qreal:  1.721300620726315914725396646181238
  oreal:  1.721300620726315914725396646181238769171452152454859310442441994273854 1
  mreal:  1.721300620726315914725396646181238769171452152454859310442441994273854093023839451092616 3
 sflint:  1.721301
 dflint:  1.72130062072632
 eflint:  1.7213006207263159147
 qflint:  1.721300620726315914725396646181238
 oflint:  1.721300620726315914725396646181238769171452152454859310442441994273854 1
 mflint:  1.721300620726315914725396646181238769171452152454859310442441994273854093023839451092616 3
 aflint: [1.721300620726315914725396646181238769171452152454859310442441994273854093023839451092616 30 +/- 4.95e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.cbrt(x)))
    fpm:  (1.06427836376089, 1.40530753932608)
    mpm:  (1.0642783637608939729537415710369183253 2, 1.40530753932607839147985648936983245094)
cmath53:  (1.06427836376089, 1.40530753932608)
  qcplx:  (1.0642783637608939729537415710369 2, 1.40530753932607839147985648936983)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.cbrt(x))))
    fpm:  1.06427836376089
    mpm:  1.064278363760893972953741571036918325320446850097936786854549681514629083798070694044380 2
    dpm:  1.064278363760893972953741571036918325320446850097936786854549681514629083798070694044380 2
```

(continues on next page)

(continued from previous page)

```
    ipm: [1.0642783637608939729537415710369183253204468500979367868545496815146290837980706940443805150747,
          1.0642783637608939729537415710369183253204468500979367868545496815146290837980706940443805155656]
    gpm:  1.0642783637608939729537415710369183253204468500979367868545496815146290837980706940443805153
    apm: [1.0642783637608939729537415710369183253204468500979367868545496815146290837980706940443805051 +/- 5.59e-90]
cmath53:  1.06427836376089
  scplx:  1.064278
  dcplx:  1.06427836376089
  ecplx:  1.0642783637608939729
  qcplx:  1.0642783637608939729537415710369
  ocplx:  1.0642783637608939729537415710369183253204468500979367868545496815146291
  mcplx:  1.0642783637608939729537415710369183253204468500979367868545496815146290837980706940443805051
sflintc:  1.064278
dflintc:  1.06427836376089
eflintc:  1.0642783637608939729537415710369
qflintc:  1.0642783637608939729537415710369183253204468500979367868545496815146291
oflintc:  1.0642783637608939729537415710369183253204468500979367868545496815146290837980706940443805051
mflintc:  1.0642783637608939729537415710369183253204468500979367868545496815146290837980706940443805051
aflintc: [1.0642783637608939729537415710369183253204468500979367868545496815146290837980706940443805 +/- 2.18e-89]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.cbrt(x))))
    fpm:  1.40530753932608
    mpm:  1.40530753932607839147985648936983245094031775195479099174983856993992383211506641461307819
    dpm:  1.40530753932607839147985648936983245094031775195479099174983856993992383211506641461307819
    ipm: [1.40530753932607839147985648936983245094031775195479099174983856993992383211506641461307819157,
          1.40530753932607839147985648936983245094031775195479099174983856993992383211506641461307876521]
    gpm:  1.40530753932607839147985648936983245094031775195479099174983856993992383211506641461307874
    apm: [1.40530753932607839147985648936983245094031775195479099174983856993992383211506641461307819 +/- 3.90e-90]
cmath53:  1.40530753932608
  scplx:  1.405308
  dcplx:  1.40530753932608
  ecplx:  1.4053075393260783916
  qcplx:  1.40530753932607839147985648936983
  ocplx:  1.40530753932607839147985648936983245094031775195479099174983856993992383211506641461307819
  mcplx:  1.40530753932607839147985648936983245094031775195479099174983856993992383211506641461307819
sflintc:  1.405308
dflintc:  1.40530753932608
eflintc:  1.4053075393260783915
qflintc:  1.40530753932607839147985648936983
oflintc:  1.40530753932607839147985648936983245094031775195479099174983856993992383211506641461307819
mflintc:  1.40530753932607839147985648936983245094031775195479099174983856993992383211506641461307819
aflintc: [1.40530753932607839147985648936983245094031775195479099174983856993992383211506641461307782 +/- 2.21e-89]
```

3.2.5 Nth root, $\mathrm{root_si}(x, n) = \sqrt[n]{x}$

`ctx.root_si`(*x*, *n*, *k=0*)

where `ctx` is `math53`, `mathc53`, `ctxcpp` or `ctxflint`.

Returns the nth root of x. For real negative x, n needs to be an odd integer for a real result. See also Wikipedia [1278], MathWorld [933], Flint [741], Flint [731], Ehrhardt [295] (4.2.47), Mpmath [617].

See also: https://dlmf.nist.gov/1.11#iv

The roots of $z^n = a + ib$ are

$$\sqrt[n]{R}\left(\cos\left(\frac{\alpha + 2k\pi}{n}\right) + i\sin\left(\frac{\alpha + 2k\pi}{n}\right)\right),$$

where $R = \sqrt{a^2 + b^2}$, $\alpha = \mathrm{ph}(a + ib)$, with the principal value phase, and $k = 0, 1, \ldots, n - 1$.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; n = 3; gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.root_si(x, n)))
    fpm:  1.72130062072632
    mpm:  1.721300620726315914725396646181238769171452152454859310442441994273854093023839451092616 3
    dpm:  1.721300620726315914725396646181238769171452152454859310442441994273854093023839451092616 3
    ipm: [1.721300620726315914725396646181238769171452152454859310442441994273854093023839451092616 3043634,
          1.721300620726315914725396646181238769171452152454859310442441994273854093023839451092616 3048543]
    gpm:  1.721300620726315914725396646181238769171452152454859310442441994273854093023839451092616 3049
    apm: [1.721300620726315914725396646181238769171452152454859310442441994273854093023839451092616 30 +/- 5.08e-90]
 math53:  1.72130062072632
  sreal:  1.721301
  dreal:  1.72130062072632
  ereal:  1.7213006207263159147
  qreal:  1.721300620726315914725396646181 24
  oreal:  1.721300620726315914725396646181238769171452152454859310442441994273854 1
  mreal:  1.721300620726315914725396646181238769171452152454859310442441994273854093023839451092616 3
 sflint:  1.721301
 dflint:  1.72130062072632
 eflint:  1.7213006207263159147
 qflint:  1.721300620726315914725396646181 24
 oflint:  1.721300620726315914725396646181238769171452152454859310442441994273854 1
 mflint:  1.721300620726315914725396646181238769171452152454859310442441994273854093023839451092616 3
 aflint: [1.721300620726315914725396646181238769171452152454859310442441994273854093023839451092616 30 +/- 4.95e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  n = 3; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.root_si(x, n)))
    fpm:  (1.06427836376089, 1.40530753932608)
    mpm:  (1.0642783637608939729537415710369183253 2, 1.40530753932607839147985648936983245094)
cmath53:  (1.06427836376089, 1.40530753932608)
  qcplx:  (1.0642783637608939729537415710369 2, 1.40530753932607839147985648936983)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  n = 3; gui.setdps(90)
>>> ffor ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.root_si(x, n))))
    fpm:  1.06427836376089
    mpm:  1.0642783637608939729537415710369183253204468500979367868545496815146290837980706940443805 2
    dpm:  1.0642783637608939729537415710369183253204468500979367868545496815146290837980706940443805 2
    ipm: [1.0642783637608939729537415710369183253204468500979367868545496815146290837980706940443805148292,
          1.0642783637608939729537415710369183253204468500979367868545496815146290837980706940443805155656]
    gpm:  1.0642783637608939729537415710369183253204468500979367868545496815146290837980706940443805 3
    apm: [1.0642783637608939729537415710369183253204468500979367868545496815146290837980706940443805 1 +/- 5.80e-90]
cmath53:  1.06427836376089
  scplx:  1.064278
  dcplx:  1.06427836376089
  ecplx:  1.0642783637608939729
  qcplx:  1.0642783637608939729537415710369 2
  ocplx:  1.0642783637608939729537415710369183253204468500979367868545496815146291
  mcplx:  1.0642783637608939729537415710369183253204468500979367868545496815146290837980706940443805 1
sflintc:  1.064278
dflintc:  1.06427836376089
eflintc:  1.0642783637608939 3
qflintc:  1.0642783637608939729537415710369 2
oflintc:  1.0642783637608939729537415710369183253204468500979367868545496815146291
mflintc:  1.0642783637608939729537415710369183253204468500979367868545496815146290837980706940443805 1
aflintc: [1.0642783637608939729537415710369183253204468500979367868545496815146290837980706940443805 1 +/- 6.23e-90]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  n = 3; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.root_si(x, n))))
    fpm:  1.40530753932608
    mpm:  1.405307539326078391479856489369832450940317751954790991749838569939923832115066414613078 19
    dpm:  1.405307539326078391479856489369832450940317751954790991749838569939923832115066414613078 19
    ipm: [1.405307539326078391479856489369832450940317751954790991749838569939923832115066414613078 1612,
          1.405307539326078391479856489369832450940317751954790991749838569939923832115066414613078 18975]
    gpm:  1.40530753932607839147985648936983245094031775195479099174983856993992383211506641461307 81874
    apm: [1.405307539326078391479856489369832450940317751954790991749838569939923832115066414613078 19 +/- 4.10e-90]
cmath53:  1.40530753932608
  scplx:  1.405308
  dcplx:  1.40530753932608
  ecplx:  1.4053075393260783916
  qcplx:  1.405307539326078391479856489369 83
  ocplx:  1.405307539326078391479856489369832450940317751954790991749838569939923 8
  mcplx:  1.405307539326078391479856489369832450940317751954790991749838569939923832115066414613078 19
sflintc:  1.405308
dflintc:  1.40530753932608
eflintc:  1.4053075393260783915
qflintc:  1.405307539326078391479856489369 83
oflintc:  1.405307539326078391479856489369832450940317751954790991749838569939923 8
mflintc:  1.405307539326078391479856489369832450940317751954790991749838569939923832115066414613078 19
aflintc: [1.405307539326078391479856489369832450940317751954790991749838569939923832115066414613078 19 +/- 6.65e-90]
```

3.3 Exponential and related functions

3.3.1 Exponential function $\exp(x) = e^x$

`ctx.exp(z)`

where `ctx` is `ctx_pm` (see *Python contexts* for details), `ctx53`, `ctxcpp`, `ctxflint` (see *.NET contexts* for details).

Returns $\exp(x)$, the exponential function of x. See also Wikipedia [1231], MathWorld [842], NIST [488], Ehrhardt [295] (4.2.34), Flint [734], Flint [724], Mpmath [545].

For complex numbers, the exponential function satisfies $\exp(x+iy) = e^x(\cos y + i \sin y)$.

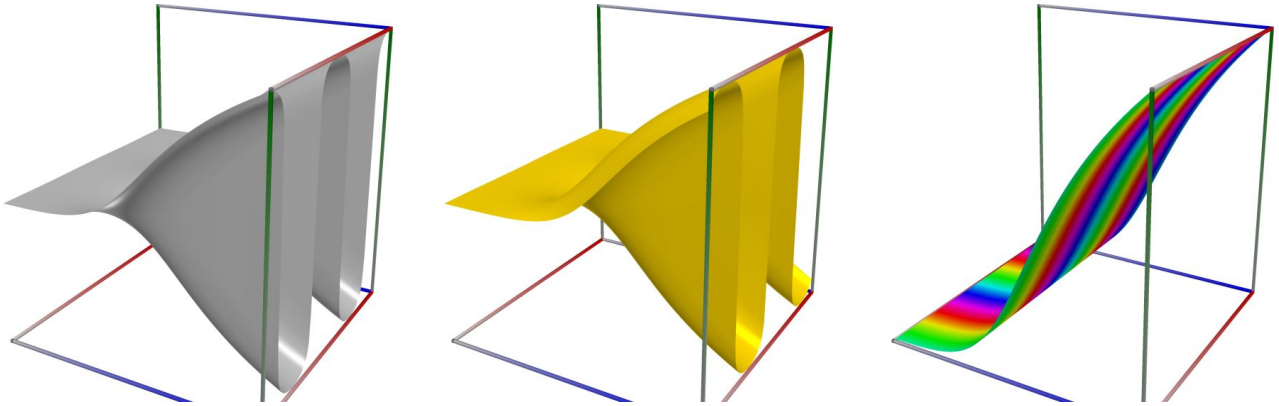

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x+iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.exp(x)))
    fpm:  0.00609674656551564
    mpm:  0.006096746565515636107134564785424901789060042080668097308393715695956976367739348325760136 56
    dpm:  0.006096746565515636107134564785424901789060042080668097308393715695956976367739348325760136 56
    ipm: [0.006096746565515636107134564785424901789060042080668097308393715695956976367739348325760136 5613434,
          0.006096746565515636107134564785424901789060042080668097308393715695956976367739348325760136 5690139]
    gpm:  0.006096746565515636107134564785424901789060042080668097308393715695956976367739348325760136 5623
    apm: [0.006096746565515636107134564785424901789060042080668097308393715695956976367739348325760136 57 +/- 8.90e-93]
 math53:  0.00609674656551564
  sreal:  0.006096747
  dreal:  0.00609674656551564
  ereal:  0.006096746565515636 1078
  qreal:  0.006096746565515636107134564785424 9
  oreal:  0.006096746565515636107134564785424901789060042080668097308393715695956976 3
  mreal:  0.006096746565515636107134564785424901789060042080668097308393715695956976367739348325760136 57
 sflint:  0.006096747
 dflint:  0.00609674656551564
 eflint:  0.006096746565515636 1078
 qflint:  0.006096746565515636107134564785424 9
 oflint:  0.006096746565515636107134564785424901789060042080668097308393715695956976 4
 mflint:  0.006096746565515636107134564785424901789060042080668097308393715695956976367739348325760136 57
 aflint: [0.006096746565515636107134564785424901789060042080668097308393715695956976367739348325760136 6 +/- 4.16e-92]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.exp(x)))
```

(continues on next page)

(continued from previous page)

```
    fpm:  (-0.00253714179646899, 0.00554375596403168)
    mpm:  (-0.0025371417964689871432868572987332349386956711932342503759027848911108716553152042303209179547541, 0.0055437559640316803155849317223325676631201581872806417518748194283172075398756195767190823780219)
cmath53:  (-0.00253714179646899, 0.00554375596403168)
  qcplx:  (-0.0025371417964689871432868572987332349386956711932342503759027848911108716553152042303209179547541, 0.0055437559640316803155849317223325676631201581872806417518748194283172075398756195767190823780219)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.exp(x))))
    fpm:  -0.00253714179646899
    mpm:  -0.00253714179646898714328685729873323493869567119323425037590278489111087165531520423032091795
    dpm:  -0.00253714179646898714328685729873323493869567119323425037590278489111087165531520423032091795
    ipm: [-0.00253714179646898714328685729873323493869567119323425037590278489111087165531520423032091795479547541,
          -0.00253714179646898714328685729873323493869567119323425037590278489111087165531520423032091795179513982]
    gpm:  -0.00253714179646898714328685729873323493869567119323425037590278489111087165531520423032091795179519
    apm: [-0.00253714179646898714328685729873323493869567119323425037590278489111087165531520423032091795 +/- 7.55e-93]
cmath53:  -0.00253714179646899
  scplx:  -0.002537142
  dcplx:  -0.00253714179646899
  ecplx:  -0.0025371417964689871436
  qcplx:  -0.00253714179646898714328685729873324
  ocplx:  -0.00253714179646898714328685729873323493869567119323425037590278489111087165531520423032091795
  mcplx:  -0.00253714179646898714328685729873323493869567119323425037590278489111087165531520423032091795
sflintc:  -0.002537142
dflintc:  -0.00253714179646899
eflintc:  -0.0025371417964689871436
qflintc:  -0.00253714179646898714328685729873324
oflintc:  -0.00253714179646898714328685729873323493869567119323425037590278489111087165531520423032091795
mflintc:  -0.00253714179646898714328685729873323493869567119323425037590278489111087165531520423032091795
aflintc: [-0.00253714179646898714328685729873323493869567119323425037590278489111087165531520423032091795 +/- 5.47e-92]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.exp(x))))
    fpm:  0.00554375596403168
    mpm:  0.005543755964031680315584931722332567663120158187280641751874819428317207539875619576719082378
    dpm:  0.005543755964031680315584931722332567663120158187280641751874819428317207539875619576719082378
    ipm: [0.005543755964031680315584931722332567663120158187280641751874819428317207539875619576719082378,
          0.005543755964031680315584931722332567663120158187280641751874819428317207539875619576719082378]
    gpm:  0.005543755964031680315584931722332567663120158187280641751874819428317207539875619576719082378
    apm: [0.005543755964031680315584931722332567663120158187280641751874819428317207539875619576719082378 +/- 2.53e-92]
cmath53:  0.00554375596403168
  scplx:  0.005543756
  dcplx:  0.00554375596403168
  ecplx:  0.005543755964031680315
  qcplx:  0.005543755964031680315584931722332567663120158187280641751874819428317207539875619576719082378
  ocplx:  0.005543755964031680315584931722332567663120158187280641751874819428317207539875619576719082378
  mcplx:  0.005543755964031680315584931722332567663120158187280641751874819428317207539875619576719082378
sflintc:  0.005543756
dflintc:  0.00554375596403168
eflintc:  0.005543755964031680315
qflintc:  0.005543755964031680315584931722332567663120158187280641751874819428317207539875619576719082378
oflintc:  0.005543755964031680315584931722332567663120158187280641751874819428317207539875619576719082378
mflintc:  0.005543755964031680315584931722332567663120158187280641751874819428317207539875619576719082378
aflintc: [0.005543755964031680315584931722332567663120158187280641751874819428317207539875619576719082378 +/- 3.67e-92]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

3.3.2 Auxiliary function $\mathrm{expj}(x) = e^{ix}$

`ctx.expj(z)`

where `ctx` is `math53`, `mathc53`, `ctxcpp`, `ctxflint`.

Returns $e^{iz} = \cos(z) + i\sin(z)$. See also Wikipedia [1367], MathWorld [1014], Mpmath [701].

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 50
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.cplxctx.fmt(ctx.expj(x)))
    fpm:  (0.37797774271298, 0.925814682327732)
    mpm:  (0.377977742712980563320575552928981670898641576134 27, 0.925814682327732296946146247544863312509403016355 61)
    dpm:  (0.377977742712980563320575552928981670898641576134 28, 0.925814682327732296946146247544863312509403016355 6)
    ipm: ([0.377977742712980563320575552928981670898641576134 2730157, 0.
↪37797774271298056332057555292898167089864157613428370 68], [0.925814682327732296946146247544863312509403016355 6011089,
↪ 0.925814682327732296946146247544863312509403016355 6064544])
    gpm:  (0.377977742712980563320575552928981670898641576134 2737, 0.
↪92581468232773229694614624754486331250940301635560 51)
    apm: ([0.377977742712980563320575552928981670898641576134 3 +/- 3.78e-50], [0.
↪92581468232773229694614624754486331250940301635560 +/- 1.06e-50])
 math53:  (0.37797774271298, 0.925814682327732)
  sreal:  (0.3779777, 0.9258147)
  dreal:  (0.37797774271298, 0.925814682327732)
  ereal:  (0.37797774271298056325, 0.92581468232773229699)
  qreal:  (0.377977742712980563320575552928981, 0.925814682327732296946146247544863)
  oreal:  (0.377977742712980563320575552928981670898641576134277570541766913010950 88, 0.
↪92581468232773229694614624754486331250940301635560394879705455193228186)
  mreal:  (0.377977742712980563320575552928981670898641576134 29, 0.925814682327732296946146247544863312509403016355 59)
 sflint:  (0.3779777, 0.9258147)
 dflint:  (0.37797774271298, 0.925814682327732)
 eflint:  (0.37797774271298056325, 0.92581468232773229699)
 qflint:  (0.377977742712980563320575552928981, 0.925814682327732296946146247544863)
 oflint:  (0.377977742712980563320575552928981670898641576134277570541766913010950 88, 0.
↪92581468232773229694614624754486331250940301635560394879705455193228185)
 mflint:  (0.377977742712980563320575552928981670898641576134 29, 0.925814682327732296946146247544863312509403016355 59)
 aflint: ([0.377977742712980563320575552928981670898641576134 3 +/- 2.92e-50], [0.
↪92581468232773229694614624754486331250940301635560 +/- 2.44e-50])
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.expj(x)))
    fpm:  (0.0511537248671967, 0.125295392257438)
    mpm:  (0.05115372486719674348982539499274676104424, 0.125295392257438253335999479318014 6319527)
cmath53:  (0.0511537248671967, 0.125295392257438)
  qcplx:  (0.05115372486719674348982539499274 67, 0.125295392257438253335999479318014)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.expj(x))))
    fpm:  0.0511537248671967
    mpm:  0.05115372486719674348982539499274676104424546622290011559347182063711701477856811597045904 61
    dpm:  0.05115372486719674348982539499274676104424546622290011559347182063711701477856811597045904 61
    ipm: [0.05115372486719674348982539499274676104424546622290011559347182063711701477856811597045904 42386423,
          0.05115372486719674348982539499274676104424546622290011559347182063711701477856811597045904 49504609]
    gpm:  0.05115372486719674348982539499274676104424546622290011559347182063711701477856811597045904 59046137
    apm: [0.05115372486719674348982539499274676104424546622290011559347182063711701477856811597045904 590 +/- 5.43e-89]
cmath53:  0.0511537248671967
  scplx:  0.05115366
  dcplx:  0.0511537248671967
```

(continues on next page)

(continued from previous page)

```
  ecplx:  0.051153724867196743477
  qcplx:  0.0511537248671967434898253949927467
  ocplx:  0.05115372486719674348982539499274676104424546622290011559347182063711701477856811597045904590466
  mcplx:  0.05115372486719674348982539499274676104424546622290011559347182063711701477856811597045904590466
sflintc:  0.05115371
dflintc:  0.0511537248671967
eflintc:  0.05115372486719674348
qflintc:  0.0511537248671967434898253949927467
oflintc:  0.05115372486719674348982539499274676104424546622290011559347182063711701477856811597045904590466
mflintc:  0.05115372486719674348982539499274676104424546622290011559347182063711701477856811597045904590466
aflintc: [0.05115372486719674348982539499274676104424546622290011559347182063711701477856811597045904590 +/- 5.74e-89]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.expj(x))))
    fpm:  0.125295392257438
    mpm:  0.125295392257438253335999479318014631952742902857197818231677101028333620650530041277946617
    dpm:  0.125295392257438253335999479318014631952742902857197818231677101028333620650530041277946617
    ipm: [0.125295392257438253335999479318014631952742902857197818231677101028333620650530041277946614682 43,
          0.125295392257438253335999479318014631952742902857197818231677101028333620650530041277946618609 7]
    gpm:  0.125295392257438253335999479318014631952742902857197818231677101028333620650530041277946616 68
    apm: [0.125295392257438253335999479318014631952742902857197818231677101028333620650530041277946620 +/- 9.02e-90]
cmath53:  0.125295392257438
  scplx:  0.1252954
  dcplx:  0.125295392257438
  ecplx:  0.12529539225743825345
  qcplx:  0.125295392257438253335999479318014
  ocplx:  0.125295392257438253335999479318014631952742902857197818231677101028333640
  mcplx:  0.125295392257438253335999479318014631952742902857197818231677101028333620650530041277946617
sflintc:  0.1252954
dflintc:  0.125295392257438
eflintc:  0.12529539225743825334
qflintc:  0.125295392257438253335999479318015
oflintc:  0.125295392257438253335999479318014631952742902857197818231677101028333620
mflintc:  0.125295392257438253335999479318014631952742902857197818231677101028333620650530041277946617
aflintc: [0.125295392257438253335999479318014631952742902857197818231677101028333620650530041277946 +/- 3.04e-89]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

3.3.3 Auxiliary function $\mathrm{expjpi}(x) = e^{i\pi x} = (-1)^x$

`ctx.`**`expjpi`**`(`z`)`

where `ctx` is `math53`, `mathc53`, `ctxcpp` or `ctxflint`.

Returns $e^{i\pi z} = \cos(\pi z) + i\sin(\pi z)$. See also Wikipedia [1367], MathWorld [1014], Flint [724], Mpmath [702].

Evaluation is accurate near zeros (see also *cospi()* and *sinpi()*):

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 50
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.cplxctx.fmt(ctx.expjpi(x)))
    fpm:  (-0.951056516295154, 0.309016994374946)
    mpm:  (-0.95105651629515357211643933337938214, 0.30901699437494742410229341718281906)
    dpm:  (-0.95105651629515357211643933337938214, 0.30901699437494742410229341718281906)
    ipm: ([-0.95105651629515357211643933337938210881, -0.95105651629515357211643933337938213821352894], [0.
↪309016994374947424102293417182819036 5903, 0.30901699437494742410229341718281908 24816])
    gpm:  (-0.95105651629515357211643933337938214356, 0.30901699437494742410229341718281905954)
    apm: ([-0.95105651629515357211643933337938213 +/- 5.12e-35], [0.30901699437494742410229341718281 91 +/- 6.40e-35])
```

(continues on next page)

(continued from previous page)

```
 math53:  (-0.951056516295154, 0.309016994374946)
  sreal:  (-0.9510566, 0.3090167)
  dreal:  (-0.951056516295154, 0.309016994374946)
  ereal:  (-0.95105651629515357222, 0.30901699437494742386)
  qreal:  (-0.95105651629515357211643933337938216, 0.309016994374947424102293417182818)
  oreal:  (-0.95105651629515357211643933337938214340569863412575022244730564443015319, 0.
↪309016994374947424102293417182819058860154589902881431067724311352630 19)
  mreal:  (-0.95105651629515357211643933337938216, 0.309016994374947424102293417182819)
 sflint:  (-0.9510566, 0.3090167)
 dflint:  (-0.951056516295154, 0.309016994374946)
 eflint:  (-0.95105651629515357222, 0.30901699437494742383)
 qflint:  (-0.95105651629515357211643933337938216, 0.309016994374947424102293417182818)
 oflint:  (-0.95105651629515357211643933337938214340569863412575022244730564443015318, 0.
↪309016994374947424102293417182819058860154589902881431067724311352630 19)
 mflint:  (-0.95105651629515357211643933337938216, 0.309016994374947424102293417182819)
 aflint: ([-0.95105651629515357211643933337938222 +/- 6.48e-35], [0.309016994374947424102293417182819 0 +/- 6.68e-35])
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.expjpi(x)))
    fpm:  (-0.00177604357879891, 0.000577071540119742)
    mpm:  (-0.0017760435787989049642054631852541036755960880447526390387421199148883238533695721978527355 0,
↪0.0005770715401197440311333088485112177545189635768257976898067280395284544709735682465690128955)
cmath53:  (-0.00177604357725158, 0.000577071540703855)
  qcplx:  (-0.0017760435787989049642054631852955 6, 0.000577071540119744031133308848511217754518963576825797689806728039528454470973568246569128954)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.expjpi(x))))
    fpm:  -0.00177604357879891
    mpm:  -0.0017760435787989049642054631852541036755960880447526390387421199148883238533695721978527355 1
    dpm:  -0.0017760435787989049642054631852541036755960880447526390387421199148883238533695721978527355 1
    ipm: [-0.0017760435787989049642054631852541036755960880447526390387421199148883238533695721978536721815 2,
          -0.0017760435787989049642054631852541036755960880447526390387421199148883238533695721978517870896293]
    gpm:  -0.0017760435787989049642054631852541036755960880447526390387421199148883238533695721978527355097
    apm: [-0.0017760435787989049642054631852541036755960880447526390387421199148883238533695721978527355 1 +/- 4.57e-93]
cmath53:  -0.00177604357725158
  scplx:  -0.001785278
  dcplx:  -0.00177604357878636
  ecplx:  -0.001776043578798888744 6
  qcplx:  -0.001776043578798904964205463185254103675596088044752639038742119914888323853369572197852735 51
  ocplx:  -0.001776043578798904964205463185254103675596088044752639038742119914887927 8
  mcplx:  -0.0017760435787989049642054631852541036755960880447526390387421199148883238533695721978527355 1
sflintc:  -0.001776044
dflintc:  -0.00177604357879891
eflintc:  -0.001776043578798904964 3
qflintc:  -0.0017760435787989049642054631852541
oflintc:  -0.001776043578798904964205463185254103675596088044752639038742119914888323 239
mflintc:  -0.0017760435787989049642054631852541036755960880447526390387421199148883238533695721978527355 1
aflintc: [-0.0017760435787989049642054631852541036755960880447526390387421199148883238533695721978527355 +/- 2.01e-92]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.expjpi(x))))
    fpm:  0.000577071540119742
    mpm:  0.000577071540119744031133308848511217754518963576825797689806728039528454470973568246569128955
    dpm:  0.000577071540119744031133308848511217754518963576825797689806728039528454470973568246569128954
    ipm: [0.000577071540119744031133308848511217754518963576825797689806728039528454470973568246570279742174,
          0.000577071540119744031133308848511217754518963576825797689806728039528454470973568246571222303674 5]
```

(continues on next page)

(continued from previous page)

```
    gpm:  0.000577071540119744031133308848511217754518963576825797689806728039528454470973568246569128952452
    apm: [0.000577071540119744031133308848511217754518963576825797689806728039528454470973568246569128952 +/- 7.15e-93]
cmath53:  0.000577071540703855
  scplx:  0.000579834
  dcplx:  0.000577071540106999
  ecplx:  0.000577071540119732107052
  qcplx:  0.000577071540119744031133308848517094
  ocplx:  0.000577071540119744031133308848511217754518963576825797689806728039528179427
  mcplx:  0.000577071540119744031133308848511217754518963576825797689806728039528454470973568246569128949
sflintc:  0.000577071
dflintc:  0.000577071540119742
eflintc:  0.000577071540119744030632
qflintc:  0.000577071540119744031133308848511216
oflintc:  0.000577071540119744031133308848511217754518963576825797689806728039528454392
mflintc:  0.000577071540119744031133308848511217754518963576825797689806728039528454470973568246569128949
aflintc: [0.000577071540119744031133308848511217754518963576825797689806728039528454470973568246569128952 +/- 8.66e-93]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

3.3.4 Exponential function with base 10, $\exp10(x) = 10^z$

`ctx.`**`exp10`**(x)

where `ctx` is `math53`, `mathc53`, `ctxcpp` or `ctxflint`.

Returns $\exp10(x) = 10^z = \exp(x \cdot \log(10))$, the base-10 exponential function of z. See also Wikipedia [1237], MathWorld [842], NIST [488], Ehrhardt [295] (4.2.36), Mpmath [551].

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.exp10(x)))
    fpm:  7.94328234724282E-06
    mpm:  0.000007943282347242815020659182828363879325889606317554843320923239293169556971914875374970952510
    dpm:  0.000007943282347242815020659182828363879325889606317554843320923239293169556971914875374970952520
    ipm: [0.000007943282347242815020659182828363879325889606317554843320923239293169556971914875374970952489,
          0.000007943282347242815020659182828363879325889606317554843320923239293169556971914875374970952544325]
    gpm:  7.943282347242815020659182828363879325889606317554843320923239293169556971914875374970952514e-06
    apm: [7.943282347242815020659182828363879325889606317554843320923239293169556971914875374970953e-6 +/- 5.13e-94]
 math53:  7.94328234724282E-06
  sreal:  7.943281E-06
  dreal:  7.94328234724281E-06
  ereal:  7.943282347242815020 4e-06
  qreal:  7.943282347242815020659182828363 9e-06
  oreal:  7.943282347242815020659182828363879325889606317554843320923239293169556 e-06
  mreal:  7.943282347242815020659182828363879325889606317554843320923239293169556971914875374970952 3E-06
 sflint:  7.943284E-06
 dflint:  7.94328234724282E-06
 eflint:  7.943282347242815022 1e-06
 qflint:  7.943282347242815020659182828363 8e-06
 oflint:  7.943282347242815020659182828363879325889606317554843320923239293169557 e-06
 mflint:  7.943282347242815020659182828363879325889606317554843320923239293169556971914875374970952 3E-06
 aflint: [7.943282347242815020659182828363879325889606317554843320923239293169556971914875374970953e-6 +/- 5.60e-94]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.exp10(x)))
    fpm:  (-8.50038314869339E-07, -7.89766859973711E-06)
    mpm:  (-0.000000850038314869338609239805360338337681680 6, -0.000007897668599737103434247958410160110027754)
```

(continues on next page)

(continued from previous page)

```
cmath53:  (-8.50038314869336E-07, -7.89766859973711E-06)
  qcplx:  (-8.50038314869338609239805360338339e-07, -7.89766859973710343424795841016012e-06)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.exp10(x))))
    fpm:  -8.50038314869339E-07
    mpm:  -0.000000850038314869338609239805360338337681680955604224931346932128110029812806298161264532165971
    dpm:  -8.500383148693386092398053603383376816809556042249313469321281100298128062981612645321659 72E-7
    ipm: [-0.000000850038314869338609239805360338337681680955604224931346932128110029812806298161264532165974884,
          -0.000000850038314869338609239805360338337681680955604224931346932128110029812806298161264532165960368 65]
    gpm:  -8.500383148693386092398053603383376816809556042249313469321281100298128062981612645321659 7149e-07
    apm: [-8.500383148693386092398053603383376816809556042249313469321281100298128062981612645321660e-7 +/- 3.94e-95]
cmath53:  -8.50038314869336E-07
  scplx:  -8.500377E-07
  dcplx:  -0.00584198487936163
  ecplx:  -8.500383148693386089e-07
  qcplx:  -8.500383148693386092398053603383 39e-07
  ocplx:  -8.500383148693386092398053603383376816809556042249313469321281100298128e-07
  mcplx:  -8.500383148693386092398053603383376816809556042249313469321281100298128062981612645321659 96E-07
sflintc:  -8.500385E-07
dflintc:  -8.50038314869339E-07
eflintc:  -8.5003831486933860942e-07
qflintc:  -8.500383148693386092398053603383 38e-07
oflintc:  -8.500383148693386092398053603383376816809556042249313469321281100298128 3e-07
mflintc:  -8.500383148693386092398053603383376816809556042249313469321281100298128062981612645321659 96E-07
aflintc: [-8.500383148693386092398053603383376816809556042249313469321281100298128062981612645321660e-7 +/- 5.35e-95]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.exp10(x))))
    fpm:  -7.89766859973711E-06
    mpm:  -0.000007897668599737103434247958410160110027754729777670493297475176609003361844566621429400862 72
    dpm:  -0.000007897668599737103434247958410160110027754729777670493297475176609003361844566621429400862 73
    ipm: [-0.000007897668599737103434247958410160110027754729777670493297475176609003361844566621429400862758197,
          -0.000007897668599737103434247958410160110027754729777670493297475176609003361844566621429400862692 6535]
    gpm:  -7.897668599737103434247958410160110027754729777670493297475176609003361844566621429400862 7245e-06
    apm: [-7.897668599737103434247958410160110027754729777670493297475176609003361844566621429400863e-6 +/- 3.05e-94]
cmath53:  -7.89766859973711E-06
  scplx:  -7.897667E-06
  dcplx:  0.0127649698419762
  ecplx:  -7.897668599737103 4338e-06
  qcplx:  -7.897668599737103434247958410160 12e-06
  ocplx:  -7.897668599737103434247958410160110027754729777670493297475176609003 3618e-06
  mcplx:  -7.897668599737103434247958410160110027754729777670493297475176609003361844566621429400862 81E-06
sflintc:  -7.89767E-06
dflintc:  -7.89766859973711E-06
eflintc:  -7.897668599737103435 5e-06
qflintc:  -7.897668599737103434247958410160 12e-06
oflintc:  -7.897668599737103434247958410160110027754729777670493297475176609003 3621e-06
mflintc:  -7.897668599737103434247958410160110027754729777670493297475176609003361844566621429400862 81E-06
aflintc: [-7.897668599737103434247958410160110027754729777670493297475176609003361844566621429400863e-6 +/- 3.66e-94]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

3.3.5 Exponential function with base 2, $\exp2(x) = 2^x$

`ctx.exp2(x)`

where `ctx` is `math53`, `mathc53`, `ctxcpp` or `ctxflint`.

Returns $\exp2(x) = 2^x = \exp(x \cdot \log(2))$, the base-2 exponential function of x. See also Wikipedia [1238], MathWorld [842], NIST [488], Ehrhardt [295] (4.2.35).

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.exp2(x)))
    fpm:  0.0291572809855252
    mpm:  0.029157280985525231749416977067185692719600936385984188715640543296418656884705110862615858 5
    dpm:  0.029157280985525231749416977067185692719600936385984188715640543296418656884705110862615858 5
    ipm: [0.029157280985525231749416977067185692719600936385984188715640543296418656884705110862615858 5305,
          0.029157280985525231749416977067185692719600936385984188715640543296418656884705110862615858 591864]
    gpm:  0.029157280985525231749416977067185692719600936385984188715640543296418656884705110862615858538
    apm: [0.029157280985525231749416977067185692719600936385984188715640543296418656884705110862615858 6 +/- 8.98e-92]
 math53:  0.0291572809855252
  sreal:  0.02915728
  dreal:  0.0291572809855252
  ereal:  0.029157280985525231751
  qreal:  0.029157280985525231749416977067185
  oreal:  0.029157280985525231749416977067185692719600936385984188715640543296418657
  mreal:  0.029157280985525231749416977067185692719600936385984188715640543296418656884705110862615858 6
 sflint:  0.02915728
 dflint:  0.0291572809855252
 eflint:  0.029157280985525231751
 qflint:  0.029157280985525231749416977067185
 oflint:  0.029157280985525231749416977067185692719600936385984188715640543296418657
 mflint:  0.029157280985525231749416977067185692719600936385984188715640543296418656884705110862615858 6
 aflint: [0.029157280985525231749416977067185692719600936385984188715640543296418656884705110862615859 +/- 5.38e-91]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.exp2(x)))
    fpm:  (0.00534910656134485, 0.0286624160437366)
    mpm:  (0.005349106561344852666031004029579789549909, 0.028662416043736589994269252987760995841 7)
cmath53:  (0.00534910656134486, 0.0286624160437366)
  qcplx:  (0.005349106561344852666031004029579 79, 0.028662416043736589994269252987761)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.exp2(x))))
    fpm:  0.00534910656134485
    mpm:  0.005349106561344852666031004029579789549908477075286076277167272471488335168704970495274662 89
    dpm:  0.005349106561344852666031004029579789549908477075286076277167272471488335168704970495274662 89
    ipm: [0.005349106561344852666031004029579789549908477075286076277167272471488335168704970495274662 8854088,
          0.005349106561344852666031004029579789549908477075286076277167272471488335168704970495274662 9036262]
    gpm:  0.005349106561344852666031004029579789549908477075286076277167272471488335168704970495274662 8854
    apm: [0.005349106561344852666031004029579789549908477075286076277167272471488335168704970495274662 9 +/- 2.49e-92]
cmath53:  0.00534910656134486
  scplx:  0.005349107
  dcplx:  -0.00175861268290327
  ecplx:  0.005349106561344852665 6
  qcplx:  0.005349106561344852666031004029579789
  ocplx:  0.005349106561344852666031004029579789549908477075286076277167272471488335 2
  mcplx:  0.005349106561344852666031004029579789549908477075286076277167272471488335168704970495274662 89
sflintc:  0.005349107
```

(continues on next page)

(continued from previous page)

```
dflintc:  0.00534910656134485
eflintc:  0.005349106561344852666 03100402957978954990847707528607627716727247148833516870497049527466289
qflintc:  0.005349106561344852666031004029579789549908477075286076277167272471488335168704970495274662 9 +/- 5.74e-92]
oflintc:  0.005349106561344852666031004029579789549908477075286076277167272471488335168704970495274662 9 +/- 5.74e-92]
mflintc:  0.005349106561344852666031004029579789549908477075286076277167272471488335168704970495274662 9 +/- 5.74e-92]
aflintc: [0.005349106561344852666031004029579789549908477075286076277167272471488335168704970495274662 9 +/- 5.74e-92]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.exp2(x))))
    fpm:  0.0286624160437366
    mpm:  0.028662416043736589994269252987760995841700161519680495442777756811290033011380480118486090 4
    dpm:  0.028662416043736589994269252987760995841700161519680495442777756811290033011380480118486090 4
    ipm: [0.028662416043736589994269252987760995841700161519680495442777756811290033011380480118486090385125,
          0.028662416043736589994269252987760995841700161519680495442777756811290033011380480118486090446489]
    gpm:  0.028662416043736589994269252987760995841700161519680495442777756811290033011380480118486090389
    apm: [0.028662416043736589994269252987760995841700161519680495442777756811290033011380480118486090 4 +/- 6.65e-92]
cmath53:  0.0286624160437366
  scplx:  0.02866242
  dcplx:  0.00384263881618094
  ecplx:  0.028662416043736589996
  qcplx:  0.028662416043736589994269252987761
  ocplx:  0.028662416043736589994269252987760995841700161519680495442777756811290033
  mcplx:  0.028662416043736589994269252987760995841700161519680495442777756811290033011380480118486090 4
sflintc:  0.02866242
dflintc:  0.0286624160437366
eflintc:  0.028662416043736589996
qflintc:  0.028662416043736589994269252987761
oflintc:  0.028662416043736589994269252987760995841700161519680495442777756811290033
mflintc:  0.028662416043736589994269252987760995841700161519680495442777756811290033011380480118486090 4
aflintc: [0.028662416043736589994269252987760995841700161519680495442777756811290033011380480118486090 +/- 5.91e-91]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

3.3.6 Auxiliary function $\mathrm{expm1}(x) = e^x - 1$

`ctx.expm1`(x)

where `ctx` is `math53`, `mathc53`, `ctxcpp` or `ctxflint`.

Returns $\mathrm{expm1}(x) = \exp(x) - 1 = e^x - 1$, computed accurately also for small x. See also Wikipedia [1230], MathWorld [842], NIST [488], BoostMath [75], Ehrhardt [295] (4.2.37), Flint [734], Flint [724], Mpmath [546].

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.expm1(x)))
    fpm:  -0.993903253434484
    mpm:  -0.993903253434484363892865435214575098210939957919331902691606284304043023632260651674239863
    dpm:  -0.993903253434484363892865435214575098210939957919331902691606284304043023632260651674239863
    ipm: [-0.993903253434484363892865435214575098210939957919331902691606284304043023632260651674239863 85495,
          -0.993903253434484363892865435214575098210939957919331902691606284304043023632260651674239863 40222]
    gpm:  -0.993903253434484363892865435214575098210939957919331902691606284304043023632260651674239863 4
    apm: [-0.993903253434484363892865435214575098210939957919331902691606284304043023632260651674239863 +/- 5.31e-91]
 math53:  -0.993903253434484
  sreal:  -0.9939033
  dreal:  -0.993903253434484
  ereal:  -0.9939032534344836389
  qreal:  -0.993903253434484363892865435214575
  oreal:  -0.993903253434484363892865435214575098210939957919331902691606284304043 2
```

(continues on next page)

(continued from previous page)

```
  mreal:  -0.9939032534344843638928654352145750982109399579193319026916062843040430236322606516742398 64
 sflint:  -0.9939033
 dflint:  -0.993903253434484
 eflint:  -0.99390325343448436389
 qflint:  -0.9939032534344843638928654352145 75
 oflint:  -0.9939032534344843638928654352145750982109399579193319026916062843040430 2
 mflint:  -0.9939032534344843638928654352145750982109399579193319026916062843040430236322606516742398 64
 aflint: [-0.9939032534344843638928654352145750982109399579193319026916062843040430236322606516742398 63 +/- 6.53e-91]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.expm1(x)))
    fpm:  (-1.00253714179647, 0.00554375596403168)
    mpm:  (-1.0025371417964689871432868572987332349393 9, 0.00554375596403168031558493172233256766312)
cmath53:  (-1.00253714179647, 0.00554375596403168)
  qcplx:  (-1.0025371417964689871432868572987 , 0.00554375596403168031558493172233257)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.expm1(x))))
    fpm:  -1.00253714179647
    mpm:  -1.00253714179646898714328685729873323493869567119323425037590278489111087165531520423032092
    dpm:  -1.00253714179646898714328685729873323493869567119323425037590278489111087165531520423032092
    ipm: [-1.00253714179646898714328685729873323493869567119323425037590278489111087165531520423032092 03209181844,
          -1.00253714179646898714328685729873323493869567119323425037590278489111087165531520423032092 03209179389]
    gpm:  -1.00253714179646898714328685729873323493869567119323425037590278489111087165531520423032092 03209179
    apm: [-1.00253714179646898714328685729873323493869567119323425037590278489111087165531520423032092 03209179 +/- 2.31e-90]
cmath53:  -1.00253714179647
  scplx:  -1.002537
  dcplx:  -1.00253714179647
  ecplx:  -1.002537141796468987
  qcplx:  -1.00253714179646898714328685729873
  ocplx:  -1.0025371417964689871432868572987332349386956711932342503759027848911109
  mcplx:  -1.00253714179646898714328685729873323493869567119323425037590278489111087165531520423032092
sflintc:  -1.002537
dflintc:  -1.00253714179647
eflintc:  -1.0025371417964689871
qflintc:  -1.00253714179646898714328685729873
oflintc:  -1.0025371417964689871432868572987332349386956711932342503759027848911109
mflintc:  -1.00253714179646898714328685729873323493869567119323425037590278489111087165531520423032092
aflintc: [-1.00253714179646898714328685729873323493869567119323425037590278489111087165531520423032092 +/- 3.54e-90]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.expm1(x))))
    fpm:  0.00554375596403168
    mpm:  0.005543755964031680315584931722332567663120158187280641751874819428317207539875619576719082 38
    dpm:  0.005543755964031680315584931722332567663120158187280641751874819428317207539875619576719082 38
    ipm: [0.005543755964031680315584931722332567663120158187280641751874819428317207539875619576719082 3780219,
          0.005543755964031680315584931722332567663120158187280641751874819428317207539875619576719082 3837748]
    gpm:  0.005543755964031680315584931722332567663120158187280641751874819428317207539875619576719082 378
    apm: [0.005543755964031680315584931722332567663120158187280641751874819428317207539875619576719082 38 +/- 9.38e-93]
cmath53:  0.00554375596403168
  scplx:  0.005543756
  dcplx:  0.00554375596403168
  ecplx:  0.005543755964031680 159
  qcplx:  0.00554375596403168031558493172233257
  ocplx:  0.0055437559640316803155849317223325676631201581872806417518748194283172075
```

(continues on next page)

(continued from previous page)

```
  mcplx:  0.00554375596403168031558493172233256766312015818728064175187481942831720753987561957671908238
sflintc:  0.005543756
dflintc:  0.00554375596403168
eflintc:  0.005543755964031680 3159
qflintc:  0.00554375596403168031558493172233257
oflintc:  0.005543755964031680315584931722332567663120158187280641751874819428317207539875619576719082 38
mflintc:  0.00554375596403168031558493172233256766312015818728064175187481942831720753987561957671908238
aflintc: [0.00554375596403168031558493172233256766312015818728064175187481942831720753987561957671908 24 +/- 2.70e-92]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

3.3.7 Auxiliary function $\mathrm{exp10m1}(x) = 10^x - 1$

`ctx.`**`exp10m1`**`(`x`)`

where `ctx` is `math53`, `mathc53`, `ctxcpp` or `ctxflint`.

Returns $10^x - 1 = \mathrm{expm1}(x \cdot \log(10))$. See also *expm1()*.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.exp10m1(x)))
    fpm:  -0.999992056717653
    mpm:  -0.999992056717652757184979340817171636120674110393682445156679076760706830443028085124625029
    dpm:  -0.999992056717652757184979340817171636120674110393682445156679076760706830443028085124625029
    ipm: [-0.999992056717652757184979340817171636120674110393682445156679076760706830443028085124625029 26,
          -0.999992056717652757184979340817171636120674110393682445156679076760706830443028085124625029 53]
    gpm:  -0.999992056717652757184979340817171636120674110393682445156679076760706830443028085124625029 03
    apm: [-0.999992056717652757184979340817171636120674110393682445156679076760706830443028085124625029 +/- 1.55e-91]
 math53:  -0.999992056717653
  sreal:  -0.9999921
  dreal:  -0.999992056717653
  ereal:  -0.9999920567176527571 9
  qreal:  -0.999992056717652757184979340817172
  oreal:  -0.999992056717652757184979340817171636120674110393682445156679076760706 83
  mreal:  -0.999992056717652757184979340817171636120674110393682445156679076760706830443028085124625029
 sflint:  -0.9999921
 dflint:  -0.999992056717653
 eflint:  -0.9999920567176527571 9
 qflint:  -0.999992056717652757184979340817172
 oflint:  -0.999992056717652757184979340817171636120674110393682445156679076760706 83
 mflint:  -0.999992056717652757184979340817171636120674110393682445156679076760706830443028085124625029
 aflint: [-0.999992056717652757184979340817171636120674110393682445156679076760706830443028085124625029 +/- 7.06e-91]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.exp10m1(x)))
    fpm:  (-1.00000085003831, -7.89766859973711E-06)
    mpm:  (-1.000000850038314869338609239805360338338, -0.000007897668599737103434247958410160110027754)
cmath53:  (-1.00000085003831, -7.8976685997371E-06)
  qcplx:  (-1.000000850038314869338609239805360338338, -7.897668599737103434247958410160110027754)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.exp10m1(x))))
    fpm:  -1.00000085003831
```

(continues on next page)

(continued from previous page)

```
    mpm:  -1.000000850038314869338609239805360338337681680955604224931346932128110029812806298161264 53
    dpm:  -1.000000850038314869338609239805360338337681680955604224931346932128110029812806298161264 53
    ipm: [-1.000000850038314869338609239805360338337681680955604224931346932128110029812806298161264 5323658,
          -1.000000850038314869338609239805360338337681680955604224931346932128110029812806298161264 5321203]
    gpm:  -1.000000850038314869338609239805360338337681680955604224931346932128110029812806298161264 5321
    apm: [-1.000000850038314869338609239805360338337681680955604224931346932128110029812806298161264 53 +/- 2.37e-90]
cmath53:  -1.00000085003831
  scplx:  -1.000001
  dcplx:  -1.00000085003831
  ecplx:  -1.0000008500383148693
  qcplx:  -1.000000850038314869338609239805 36
  ocplx:  -1.000000850038314869338609239805360338337681680955604224931346932128 11
  mcplx:  -1.000000850038314869338609239805360338337681680955604224931346932128110029812806298161264 53
sflintc:  -1.000001
dflintc:  -1.00000085003831
eflintc:  -1.0000008500383148693
qflintc:  -1.000000850038314869338609239805 36
oflintc:  -1.000000850038314869338609239805360338337681680955604224931346932128 11
mflintc:  -1.000000850038314869338609239805360338337681680955604224931346932128110029812806298161264 53
aflintc: [-1.000000850038314869338609239805360338337681680955604224931346932128110029812806298161264 53 +/- 3.11e-90]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.exp10m1(x))))
    fpm:  -7.89766859973711E-06
    mpm:  -0.000007897668599737103434247958410160110027754729777670493297475176609003361844566621429400862 72
    dpm:  -0.000007897668599737103434247958410160110027754729777670493297475176609003361844566621429400862 73
    ipm: [-0.000007897668599737103434247958410160110027754729777670493297475176609003361844566621429400862 758197,
          -0.000007897668599737103434247958410160110027754729777670493297475176609003361844566621429400862 69535]
    gpm:  -7.897668599737103434247958410160110027754729777670493297475176609003361844566621429400862 7245e-06
    apm: [-7.897668599737103434247958410160110027754729777670493297475176609003361844566621429400863e-6 +/- 3.02e-94]
cmath53:  -7.8976685997371E-06
  scplx:  -7.897667E-06
  dcplx:  -7.8976685997371E-06
  ecplx:  -7.8976685997371034338e-06
  qcplx:  -7.897668599737103434247958410 6012e-06
  ocplx:  -7.897668599737103434247958410160110027754729777670493297475176609003 618e-06
  mcplx:  -7.897668599737103434247958410160110027754729777670493297475176609003361844566621429400862 81E-06
sflintc:  -7.89767E-06
dflintc:  -7.89766859973711E-06
eflintc:  -7.8976685997371034355e-06
qflintc:  -7.897668599737103434247958410 6012e-06
oflintc:  -7.897668599737103434247958410160110027754729777670493297475176609003 621e-06
mflintc:  -7.897668599737103434247958410160110027754729777670493297475176609003361844566621429400862 81E-06
aflintc: [-7.897668599737103434247958410160110027754729777670493297475176609003361844566621429400863e-6 +/- 3.56e-94]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

3.3.8 Auxiliary function $\mathrm{exp2m1}(x) = 2^x - 1$

`ctx.`**`exp2m1`**`(`x`)`

where `ctx` is `math53`, `mathc53`, `ctxcpp` or `ctxflint`.

Returns $2^x - 1 = \mathrm{expm1}(x \cdot \log(2))$. See also *expm1()*.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.exp2m1(x)))
```

(continues on next page)

(continued from previous page)

```
    fpm:  -0.970842719014475
    mpm:  -0.97084271901447476825058302293281430728039906361401581128435945670358134311529488913738414141
    dpm:  -0.97084271901447476825058302293281430728039906361401581128435945670358134311529488913738414141
    ipm: [-0.97084271901447476825058302293281430728039906361401581128435945670358134311529488913738414153 47,
          -0.97084271901447476825058302293281430728039906361401581128435945670358134311529488913738414128924]
    gpm:  -0.97084271901447476825058302293281430728039906361401581128435945670358134311529488913738414141
    apm: [-0.97084271901447476825058302293281430728039906361401581128435945670358134311529488913738414141 +/- 5.79e-91]
 math53:  -0.970842719014475
  sreal:  -0.9708427
  dreal:  -0.970842719014475
  ereal:  -0.97084271901447476827
  qreal:  -0.970842719014474768250583022932814
  oreal:  -0.970842719014474768250583022932814358134311529488913738414142
  mreal:  -0.970842719014474768250583022932814358134311529488913738414142
 sflint:  -0.9708427
 dflint:  -0.970842719014475
 eflint:  -0.97084271901447476827
 qflint:  -0.970842719014474768250583022932814
 oflint:  -0.970842719014474768250583022932814358134311529488913738414142
 mflint:  -0.970842719014474768250583022932814358134311529488913738414142
 aflint: [-0.970842719014474768250583022932814358134311529488913738414141 +/- 7.68e-91]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.exp2m1(x)))
    fpm:  (-0.994650893438655, 0.0286624160437366)
    mpm:  (-0.994650893438655147333968995970420210450091522924713923722832727528511664831295029504725337, 0.028662416043736589994269252987760995841 7)
cmath53:  (-0.994650893438655, 0.0286624160437366)
  qcplx:  (-0.994650893438655147333968995970420, 0.028662416043736589994269252987761)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.exp2m1(x))))
    fpm:  -0.994650893438655
    mpm:  -0.994650893438655147333968995970420210450091522924713923722832727528511664831295029504725337
    dpm:  -0.994650893438655147333968995970420210450091522924713923722832727528511664831295029504725337
    ipm: [-0.994650893438655147333968995970420210450091522924713923722832727528511664831295029504725337 19705,
          -0.994650893438655147333968995970420210450091522924713923722832727528511664831295029504725337 07432]
    gpm:  -0.994650893438655147333968995970420210450091522924713923722832727528511664831295029504725337 07
    apm: [-0.994650893438655147333968995970420210450091522924713923722832727528511664831295029504725337 +/- 2.09e-91]
cmath53:  -0.994650893438655
  scplx:  -0.9946509
  dcplx:  -0.994650893438655
  ecplx:  -0.99465089343865514734
  qcplx:  -0.994650893438655147333968995970420
  ocplx:  -0.994650893438655147333968995970420210450091522924713923722832727528511664831295029504725337
  mcplx:  -0.994650893438655147333968995970420210450091522924713923722832727528511664831295029504725337
sflintc:  -0.9946509
dflintc:  -0.994650893438655
eflintc:  -0.99465089343865514734
qflintc:  -0.994650893438655147333968995970420
oflintc:  -0.994650893438655147333968995970420210450091522924713923722832727528511664831295029504725337
mflintc:  -0.994650893438655147333968995970420210450091522924713923722832727528511664831295029504725337
aflintc: [-0.994650893438655147333968995970420210450091522924713923722832727528511664831295029504725337 +/- 5.75e-91]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.exp2m1(x))))
```

(continues on next page)

(continued from previous page)

```
    fpm:  0.0286624160437366
    mpm:  0.028662416043736589994269252987760995841700161519680495442777756811290033011380480118486090 4
    dpm:  0.028662416043736589994269252987760995841700161519680495442777756811290033011380480118486090 4
    ipm: [0.028662416043736589994269252987760995841700161519680495442777756811290033011380480118486090385125,
          0.028662416043736589994269252987760995841700161519680495442777756811290033011380480118486090446489]
    gpm:  0.028662416043736589994269252987760995841700161519680495442777756811290033011380480118486090393
    apm: [0.028662416043736589994269252987760995841700161519680495442777756811290033011380480118486090 4 +/- 6.36e-92]
cmath53:  0.0286624160437366
  scplx:  0.02866242
  dcplx:  0.0286624160437366
  ecplx:  0.028662416043736589996
  qcplx:  0.028662416043736589994269252987761
  ocplx:  0.028662416043736589994269252987760995841700161519680495442777756811290033
  mcplx:  0.028662416043736589994269252987760995841700161519680495442777756811290033011380480118486090 4
sflintc:  0.02866242
dflintc:  0.0286624160437366
eflintc:  0.028662416043736589996
qflintc:  0.028662416043736589994269252987761
oflintc:  0.028662416043736589994269252987760995841700161519680495442777756811290033
mflintc:  0.028662416043736589994269252987760995841700161519680495442777756811290033011380480118486090 4
aflintc: [0.028662416043736589994269252987760995841700161519680495442777756811290033011380480118486090 +/- 5.64e-91]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

3.4 Logarithms and related functions

3.4.1 Logarithm $\log(x[, base])$

`ctx.log`(x[, *base*])

where `ctx` is `math53`, `mathc53`, `ctxcpp`, `ctxflint`.

With one argument, returns the natural logarithm of x (to base e).

With two arguments, returns the logarithm of x to the given base, calculated as $\log(x)/\log(base)$.

See also Wikipedia [1227], MathWorld [848], NIST [489], Ehrhardt [295] (4.2.41), Flint [734], Flint [724], Mpmath [552].

$$\log(x) = \int_1^x \frac{1}{t}\,\mathrm{d}t.$$

If x is less than 1, then this area is considered to be negative.

The principal branch of the complex logarithm is used, meaning that $\Im(\log(z)) = -\pi < \arg(z) \leq \pi$.

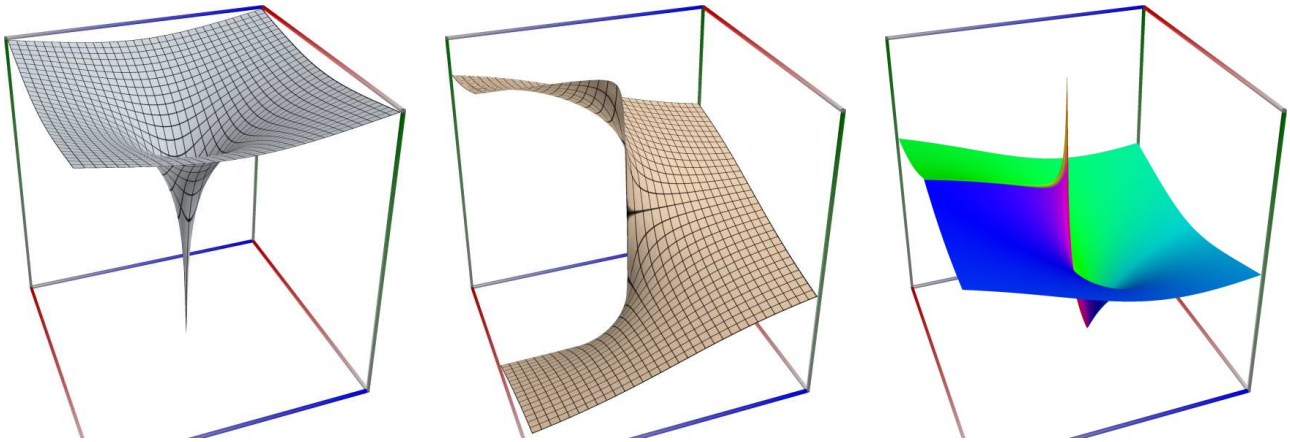

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \leq x \leq 6$ (blue axis), $-6 \leq y \leq 6$ (red axis), $-10 \leq z \leq 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.log(x)))
    fpm:  1.62924053973028
    mpm:  1.62924053973028008762678840011128803263459208177972126299860417055221425934218776754971342
    dpm:  1.62924053973028008762678840011128803263459208177972126299860417055221425934218776754971342
    ipm: [1.62924053973028008762678840011128803263459208177972126299860417055221425934218776754971342114174211,
          1.62924053973028008762678840011128803263459208177972126299860417055221425934218776754971341417912]
    gpm:  1.62924053973028008762678840011128803263459208177972126299860417055221425934218776754971341179
    apm: [1.62924053973028008762678840011128803263459208177972126299860417055221425934218776754971342 +/- 3.02e-90]
 math53:  1.62924053973028
  sreal:  1.629241
  dreal:  1.62924053973028
  ereal:  1.6292405397302800876
  qreal:  1.62924053973028008762678840011129
  oreal:  1.62924053973028008762678840011128803263459208177972126299860417055221425
  mreal:  1.62924053973028008762678840011128803263459208177972126299860417055221425934218776754971342
 sflint:  1.629241
 dflint:  1.62924053973028
 eflint:  1.6292405397302800876
 qflint:  1.62924053973028008762678840011129
```

(continues on next page)

(continued from previous page)

```
 oflint:  1.62924053973028008762678840011128803263459208177972126299860417055221425934218776754971342
 mflint:  1.62924053973028008762678840011128803263459208177972126299860417055221425934218776754971342
 aflint: [1.62924053973028008762678840011128803263459208177972126299860417055221425934218776754971342 +/- 4.23e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.log(x)))
    fpm:  (1.70076532972614, 2.76786583362424)
    mpm:  (1.700765329726137873303211885541782526415, 2.767865833624239779015582071759434775789673138286494659524759405748981547995542878869050002)
cmath53:  (1.70076532972614, 2.76786583362424)
  qcplx:  (1.700765329726137873303211885541782526415, 2.767865833624239779015582071759434775789673138286494659524759405748981547995542878869050002)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.log(x))))
    fpm:  1.70076532972614
    mpm:  1.700765329726137873303211885541782526415247351481684962033953681265071720242159387510565233347 9,
          1.700765329726137873303211885541782526415247351481684962033953681265071720242159387510565233593 4]
    gpm:  1.700765329726137873303211885541782526415247351481684962033953681265071720242159387510565233 6
    apm: [1.700765329726137873303211885541782526415247351481684962033953681265071720242159387510565233 +/- 3.77e-90]
cmath53:  1.70076532972614
  scplx:  1.700765
  dcplx:  1.70076532972614
  ecplx:  1.7007653297261378733
  qcplx:  1.700765329726137873303211885541782
  ocplx:  1.700765329726137873303211885541782526415247351481684962033953681265071 6
  mcplx:  1.700765329726137873303211885541782526415247351481684962033953681265071720242159387510565233
sflintc:  1.700765
dflintc:  1.70076532972614
eflintc:  1.7007653297261378733
qflintc:  1.700765329726137873303211885541782
oflintc:  1.700765329726137873303211885541782526415247351481684962033953681265071 7
mflintc:  1.700765329726137873303211885541782526415247351481684962033953681265071720242159387510565233
aflintc: [1.700765329726137873303211885541782526415247351481684962033953681265071720242159387510565233 +/- 4.22e-90]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.log(x))))
    fpm:  2.76786583362424
    mpm:  2.767865833624239779015582071759434775789673138286494659524759405748981547995542878869050002
    dpm:  2.767865833624239779015582071759434775789673138286494659524759405748981547995542878869050002
    ipm: [2.767865833624239779015582071759434775789673138286494659524759405748981547995542878869050021 9374,
          2.767865833624239779015582071759434775789673138286494659524759405748981547995542878869050022 4283]
    gpm:  2.767865833624239779015582071759434775789673138286494659524759405748981547995542878869050021 9
    apm: [2.767865833624239779015582071759434775789673138286494659524759405748981547995542878869050002 +/- 2.38e-90]
cmath53:  2.76786583362424
  scplx:  2.767866
  dcplx:  2.76786583362424
  ecplx:  2.767865833624239779
  qcplx:  2.767865833624239779015582071759434775789673138286494659524759405748981547995542878869050002
  ocplx:  2.767865833624239779015582071759434775789673138286494659524759405748981 5
  mcplx:  2.767865833624239779015582071759434775789673138286494659524759405748981547995542878869050002
sflintc:  2.767866
dflintc:  2.76786583362424
eflintc:  2.767865833624239779
qflintc:  2.767865833624239779015582071759434
```

(continues on next page)

(continued from previous page)

```
oflintc:  2.76786583362423977901558207175943477578967313828649465952475940574898154799554287886905002
mflintc:  2.76786583362423977901558207175943477578967313828649465952475940574898154799554287886905002
aflintc: [2.76786583362423977901558207175943477578967313828649465952475940574898154799554287886905002 +/- 2.98e-90]
```

3.4.2 Logarithm with base 10, $\log10(x) = \log_{10}(x)$

`ctx.log10`(x)

where `ctx` is `math53`, `mathc53`, `ctxcpp` or `ctxflint`.

Returns the base-10 logarithm of x, $\log_{10}(x) = \log(x)/\log(10)$. See also. Wikipedia [1225], MathWorld [837], NIST [489], Ehrhardt [295] (4.2.44), Mpmath [551].

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.log10(x)))
    fpm:  0.707570176097936
    mpm:  0.707570176097936365835197797583452339207696242615742262210234122649923215040779308838653026
    dpm:  0.707570176097936365835197797583452339207696242615742262210234122649923215040779308838653026
    ipm: [0.707570176097936365835197797583452339207696242615742262210234122649923215040779308838653026302561236,
          0.707570176097936365835197797583452339207696242615742262210234122649923215040779308838653026302585781]
    gpm:  0.707570176097936365835197797583452339207696242615742262210234122649923215040779308838653026302574
    apm: [0.707570176097936365835197797583452339207696242615742262210234122649923215040779308838653025 +/- 9.54e-91]
 math53:  0.707570176097936
  sreal:  0.7075702
  dreal:  0.707570176097936
  ereal:  0.70757017609793636584
  qreal:  0.707570176097936365835197797583452
  oreal:  0.707570176097936365835197797583452339207696242615742262210234122649923215040779308838653026
  mreal:  0.707570176097936365835197797583452339207696242615742262210234122649923215040779308838653026
 sflint:  0.7075702
 dflint:  0.707570176097936
 eflint:  0.70757017609793636584
 qflint:  0.707570176097936365835197797583452
 oflint:  0.707570176097936365835197797583452339207696242615742262210234122649923215040779308838653026
 mflint:  0.707570176097936365835197797583452339207696242615742262210234122649923215040779308838653026
 aflint: [0.707570176097936365835197797583452339207696242615742262210234122649923215040779308838653025 +/- 9.31e-91]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.log10(x)))
    fpm:  (0.738632997712426, 1.20206885819155)
    mpm:  (0.738632997712426312301471095654844404148793389532562841632630733843083286495008373599818853632432, 1.202068858191551436761337006603528406682)
cmath53:  (0.738632997712426, 1.20206885819155)
  qcplx:  (0.738632997712426312301471095654844, 1.202068858191551436761337006603528406682)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.log10(x))))
    fpm:  0.738632997712426
    mpm:  0.738632997712426312301471095654844041487933895325628416326307338430832864950083735998188536
    dpm:  0.738632997712426312301471095654844041487933895325628416326307338430832864950083735998188536
    ipm: [0.738632997712426312301471095654844041487933895325628416326307338430832864950083735998188536532432,
          0.738632997712426312301471095654844041487933895325628416326307338430832864950083735998188536447705]
    gpm:  0.738632997712426312301471095654844041487933895325628416326307338430832864950083735998188536453645
    apm: [0.738632997712426312301471095654844041487933895325628416326307338430832864950083735998188536 +/- 6.61e-91]
cmath53:  0.738632997712426
```

(continues on next page)

(continued from previous page)

```
  scplx:  0.738633
  dcplx:  0.738632997712426
  ecplx:  0.7386329977124263123
  qcplx:  0.738632997712426312301471095654844
  ocplx:  0.7386329977124263123014710956548440414879338953256284163263073384308328649500837359981885370
  mcplx:  0.738632997712426312301471095654844041487933895325628416326307338430832864950083735998188537
sflintc:  0.738633
dflintc:  0.738632997712426
eflintc:  0.7386329977124263123
qflintc:  0.738632997712426312301471095654844
oflintc:  0.7386329977124263123014710956548440414879338953256284163263073384308328649500837359981885370
mflintc:  0.738632997712426312301471095654844041487933895325628416326307338430832864950083735998188537
aflintc: [0.738632997712426312301471095654844041487933895325628416326307338430832864950083735998188537 +/- 5.53e-90]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.log10(x))))
    fpm:  1.20206885819155
    mpm:  1.202068858191551436761337006603528406682053159713536379690328150227157167331044934583964030
    dpm:  1.202068858191551436761337006603528406682053159713536379690328150227157167331044934583964030
    ipm: [1.202068858191551436761337006603528406682053159713536379690328150227157167331044934583964031540
          1.202068858191551436761337006603528406682053159713536379690328150227157167331044934583964031785
    gpm:  1.202068858191551436761337006603528406682053159713536379690328150227157167331044934583964031
    apm: [1.202068858191551436761337006603528406682053159713536379690328150227157167331044934583964030 +/- 2.24e-90]
cmath53:  1.20206885819155
  scplx:  1.202069
  dcplx:  1.20206885819155
  ecplx:  1.2020688581915514368
  qcplx:  1.202068858191551436761337006603530
  ocplx:  1.20206885819155143676133700660352840668205315971353637969032815022715716733104493458396403
  mcplx:  1.20206885819155143676133700660352840668205315971353637969032815022715716733104493458396403
sflintc:  1.202069
dflintc:  1.20206885819155
eflintc:  1.2020688581915514368
qflintc:  1.202068858191551436761337006603530
oflintc:  1.20206885819155143676133700660352840668205315971353637969032815022715716733104493458396403
mflintc:  1.20206885819155143676133700660352840668205315971353637969032815022715716733104493458396403
aflintc: [1.20206885819155143676133700660352840668205315971353637969032815022715716733104493458396403 +/- 3.97e-90]
```

3.4.3 Logarithm with base 2, $\log2(x) = \log_2(x)$

`ctx.log2`(x)

where `ctx` is `math53`, `mathc53`, `ctxcpp` or `ctxflint`.

Returns the base-2 logarithm of x, $\log_2(x) = \log(x)/\log(2)$. See also Wikipedia :cite:p: $WikipediaFun19$, MathWorld [836], NIST [489].

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.log2(x)))
    fpm:  2.35049724708413
    mpm:  2.350497247084133241837485525268830686906250297012721136527605323111859960233115414969483880
    dpm:  2.350497247084133241837485525268830686906250297012721136527605323111859960233115414969483880
    ipm: [2.350497247084133241837485525268830686906250297012721136527605323111859960233115414969483882717
          2.350497247084133241837485525268830686906250297012721136527605323111859960233115414969483883698
    gpm:  2.350497247084133241837485525268830686906250297012721136527605323111859960233115414969483883
    apm: [2.350497247084133241837485525268830686906250297012721136527605323111859960233115414969483880 +/- 3.90e-90]
 math53:  2.35049724708413
  sreal:  2.350497
```

(continues on next page)

(continued from previous page)

```
  dreal:  2.35049724708413
  ereal:  2.3504972470841332419
  qreal:  2.350497247084133241837485525268830686906250297012721136527605323111859960233115414969483888
 sflint:  2.350497
 dflint:  2.35049724708413
 eflint:  2.3504972470841332419
 qflint:  2.350497247084133241837485525268830686906250297012721136527605323111859960233115414969483888
 oflint:  2.3504972470841332418374855252688306869062502970127211365276053231118599602331154149694838
 mflint:  2.350497247084133241837485525268830686906250297012721136527605323111859960233115414969483888
 aflint: [2.350497247084133241837485525268830686906250297012721136527605323111859960233115414969483888 +/- 5.19e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.log2(x)))
    fpm:  (2.45368570691178, 3.99318631201569)
    mpm:  (2.4536857069117818108036655229042930185770, 3.9931863120156873955301989166021203277)
cmath53:  (2.45368570691178, 3.99318631201569)
  qcplx:  (2.4536857069117818108036655229042930, 3.9931863120156873955301989166021203277)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.log2(x))))
    fpm:  2.45368570691178
    mpm:  2.453685706911781810803665522904293018577056996298468059713032585955129058532911995880672340
    dpm:  2.453685706911781810803665522904293018577056996298468059713032585955129058532911995880672340
    ipm: [2.453685706911781810803665522904293018577056996298468059713032585955129058532911995880672305760,
          2.453685706911781810803665522904293018577056996298468059713032585955129058532911995880672303905]
    gpm:  2.45368570691178181080366552290429301857705699629846805971303258595512905853291199588067233850
    apm: [2.45368570691178181080366552290429301857705699629846805971303258595512905853291199588067234 +/- 3.09e-90]
cmath53:  2.45368570691178
  scplx:  2.453686
  dcplx:  2.45368570691178
  ecplx:  2.4536857069117818109
  qcplx:  2.4536857069117818108036655229042930
  ocplx:  2.453685706911781810803665522904293018577056996298468059713032585955128905853291199588067234
  mcplx:  2.453685706911781810803665522904293018577056996298468059713032585955129058532911995880672340
sflintc:  2.453686
dflintc:  2.45368570691178
eflintc:  2.4536857069117818109
qflintc:  2.45368570691178181080366552290429
oflintc:  2.453685706911781810803665522904293018577056996298468059713032585955129058532911995880672340
mflintc:  2.453685706911781810803665522904293018577056996298468059713032585955129058532911995880672340
aflintc: [2.453685706911781810803665522904293018577056996298468059713032585955129058532911995880672340 +/- 7.86e-90]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.log2(x))))
    fpm:  3.99318631201569
    mpm:  3.993186312015687395530198916602120327700088041451573367702771802649268540867823351567794870
    dpm:  3.993186312015687395530198916602120327700088041451573367702771802649268540867823351567794870
    ipm: [3.993186312015687395530198916602120327700088041451573367702771802649268540867823351567794867466,
          3.993186312015687395530198916602120327700088041451573367702771802649268540867823351567794868037]
    gpm:  3.99318631201568739553019891660212032770008804145157336770277180264926854086782335156779486750
    apm: [3.993186312015687395530198916602120327700088041451573367702771802649268540867823351567794870 +/- 3.66e-90]
cmath53:  3.99318631201569
  scplx:  3.993186
```

(continues on next page)

(continued from previous page)

```
  dcplx:  3.99318631201569
  ecplx:  3.9931863120156873956
  qcplx:  3.99318631201568739553019891660212
  ocplx:  3.99318631201568739553019891660212032770008804145157336770277180264926854086782335156779487
  mcplx:  3.99318631201568739553019891660212032770008804145157336770277180264926854086782335156779487
sflintc:  3.993186
dflintc:  3.99318631201569
eflintc:  3.9931863120156873956
qflintc:  3.99318631201568739553019891660212
oflintc:  3.99318631201568739553019891660212032770008804145157336770277180264926854086782335156779487
mflintc:  3.99318631201568739553019891660212032770008804145157336770277180264926854086782335156779487
aflintc: [3.99318631201568739553019891660212032770008804145157336770277180264926854086782335156779487 +/- 4.05e-89]
```

3.4.4 Auxiliary function $\mathrm{log1p}(x) = \log(x+1)$

ctx.log1p(x)

where ctx is math53, mathc53, ctxcpp, ctxflint.

Returns $\log(1+x) = \log(1+x)$, accurately for small x. See also Wikipedia [1236], Wikipedia [1235], MathWorld [847], NIST [489], BoostMath [107], Ehrhardt [295] (4.2.34), Flint [734], Flint [724], Mpmath [550].

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.log1p(x)))
    fpm:  1.80828877117927
    mpm:  1.808288771179265564733397648741250538714580254452488086904055745451867197167596250949432
    dpm:  1.808288771179265564733397648741250538714580254452488086904055745451867197167596250949432
    ipm: [1.808288771179265564733397648741250538714580254452488086904055745451867197167596250949432000 7821,
          1.808288771179265564733397648741250538714580254452488086904055745451867197167596250949432001 273]
    gpm:  1.808288771179265564733397648741250538714580254452488086904055745451867197167596250949432001
    apm: [1.808288771179265564733397648741250538714580254452488086904055745451867197167596250949432000 +/- 1.19e-90]
 math53:  1.80828877117927
  sreal:  1.808289
  dreal:  1.80828877117927
  ereal:  1.8082887711792655647
  qreal:  1.808288771179265564733397648741 25
  oreal:  1.808288771179265564733397648741250538714580254452488086904055745451867 2
  mreal:  1.808288771179265564733397648741250538714580254452488086904055745451867197167596250949432
 sflint:  1.808289
 dflint:  1.80828877117927
 eflint:  1.8082887711792655647
 qflint:  1.808288771179265564733397648741 25
 oflint:  1.808288771179265564733397648741250538714580254452488086904055745451867 2
 mflint:  1.808288771179265564733397648741250538714580254452488086904055745451867197167596250949432
 aflint: [1.808288771179265564733397648741250538714580254452488086904055745451867197167596250949432000 +/- 1.65e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.log1p(x)))
    fpm:  (1.51771682020277, 2.68774865206828)
    mpm:  (1.5177168202027715285094220495002017028 43, 2.687748652068283096846111693219307791804)
cmath53:  (1.51771682020277, 2.68774865206828)
  qcplx:  (1.5177168202027715285094220495002, 2.687748652068283096846111693219 31)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
```

(continues on next page)

(continued from previous page)

```
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.log1p(x))))
    fpm:  1.51771682020277
    mpm:  1.5177168202027715285094220495002017028430255324618406473738373945788423896261490951107314 1
    dpm:  1.5177168202027715285094220495002017028430255324618406473738373945788423896261490951107314 1
    ipm: [1.5177168202027715285094220495002017028430255324618406473738373945788423896261490951107314049959,
          1.5177168202027715285094220495002017028430255324618406473738373945788423896261490951107314054868]
    gpm:  1.5177168202027715285094220495002017028430255324618406473738373945788423896261490951107314052
    apm: [1.5177168202027715285094220495002017028430255324618406473738373945788423896261490951107314 +/- 5.44e-90]
cmath53:  1.51771682020277
  scplx:  1.517717
  dcplx:  1.51771682020277
  ecplx:  1.5177168202027715285
  qcplx:  1.517716820202771528509422049500 2
  ocplx:  1.5177168202027715285094220495002017028430255324618406473738373945788424
  mcplx:  1.517716820202771528509422049500201702843025532461840647373837394578842389626149095110731 4
sflintc:  1.517717
dflintc:  1.51771682020277
eflintc:  1.5177168202027715285
qflintc:  1.517716820202771528509422049500 2
oflintc:  1.5177168202027715285094220495002017028430255324618406473738373945788424
mflintc:  1.517716820202771528509422049500201702843025532461840647373837394578842389626149095110731 4
aflintc: [1.517716820202771528509422049500201702843025532461840647373837394578842389626149095110731 40 +/- 5.89e-90]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.log1p(x))))
    fpm:  2.68774865206828
    mpm:  2.6877486520682830968461116932193077918037045738985162041223136622806129771441137343464768 6
    dpm:  2.6877486520682830968461116932193077918037045738985162041223136622806129771441137343464768 6
    ipm: [2.6877486520682830968461116932193077918037045738985162041223136622806129771441137343464768619335,
          2.6877486520682830968461116932193077918037045738985162041223136622806129771441137343464768624244]
    gpm:  2.6877486520682830968461116932193077918037045738985162041223136622806129771441137343464768624
    apm: [2.6877486520682830968461116932193077918037045738985162041223136622806129771441137343464768 6 +/- 2.89e-90]
cmath53:  2.68774865206828
  scplx:  2.687749
  dcplx:  2.68774865206828
  ecplx:  2.6877486520682830969
  qcplx:  2.6877486520682830968461116932193 1
  ocplx:  2.6877486520682830968461116932193077918037045738985162041223136622806 13
  mcplx:  2.6877486520682830968461116932193077918037045738985162041223136622806129771441137343464768 6
sflintc:  2.687749
dflintc:  2.68774865206828
eflintc:  2.6877486520682830969
qflintc:  2.6877486520682830968461116932193 1
oflintc:  2.6877486520682830968461116932193077918037045738985162041223136622806 13
mflintc:  2.6877486520682830968461116932193077918037045738985162041223136622806129771441137343464768 6
aflintc: [2.6877486520682830968461116932193077918037045738985162041223136622806129771441137343464768 6 +/- 3.00e-90]
```

3.4.5 Auxiliary function $\mathrm{log10p1}(x) = \log_{10}(1+x)$

`ctx.`**`log10p1`**`(`x`)`

where `ctx` is `math53`, `mathc53`, `ctxcpp` or `ctxflint`.

Returns $\mathrm{log10p1}(x)) = \log_{10}(1+x) = \mathrm{log1p}(x)/\log(10)$. See also *log1p()*.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.log10p1(x)))
    fpm:  0.785329835010767
```

(continues on next page)

(continued from previous page)

```
    mpm:  0.7853298350107670338857485137573213492633787571134042120703489436773712299997250081968543 64
    dpm:  0.7853298350107670338857485137573213492633787571134042120703489436773712299997250081968543 62
    ipm: [0.7853298350107670338857485137573213492633787571134042120703489436773712299997250081968543 6436410294,
          0.7853298350107670338857485137573213492633787571134042120703489436773712299997250081968543 6459385]
    gpm:  0.7853298350107670338857485137573213492633787571134042120703489436773712299997250081968543 6435
    apm: [0.7853298350107670338857485137573213492633787571134042120703489436773712299997250081968543 64 +/- 6.93e-91]
 math53:  0.785329835010767
  sreal:  0.7853298
  dreal:  0.785329835010767
  ereal:  0.78532983501076703388
  qreal:  0.785329835010767033885748513757321
  oreal:  0.7853298350107670338857485137573213492633787571134042120703489436773712 4
  mreal:  0.7853298350107670338857485137573213492633787571134042120703489436773712299997250081968543 64
 sflint:  0.7853298
 dflint:  0.785329835010767
 eflint:  0.78532983501076703388
 qflint:  0.785329835010767033885748513757321
 oflint:  0.7853298350107670338857485137573213492633787571134042120703489436773712 3
 mflint:  0.7853298350107670338857485137573213492633787571134042120703489436773712299997250081968543 64
 aflint: [0.7853298350107670338857485137573213492633787571134042120703489436773712299997250081968543 6 +/- 6.00e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.log10p1(x)))
    fpm:  (0.659136040105813, 1.16727440833616)
    mpm:  (0.659136040105813467440589358547542577697767695990348249587362491929748218044299903855841524, 1.167274408336158466353389724794962530 75)
cmath53:  (0.659136040105813, 1.16727440833616)
  qcplx:  (0.659136040105813467440589358547542, 1.167274408336158466353389724794962530 75)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.log10p1(x))))
    fpm:  0.659136040105813
    mpm:  0.659136040105813467440589358547542577697767695990348249587362491929748218044299903855841524
    dpm:  0.659136040105813467440589358547542577697767695990348249587362491929748218044299903855841524
    ipm: [0.659136040105813467440589358547542577697767695990348249587362491929748218044299903855841524 152351139,
          0.659136040105813467440589358547542577697767695990348249587362491929748218044299903855841524 152424775]
    gpm:  0.659136040105813467440589358547542577697767695990348249587362491929748218044299903855841524
    apm: [0.659136040105813467440589358547542577697767695990348249587362491929748218044299903855841524 +/- 6.98e-91]
cmath53:  0.659136040105813
  scplx:  0.659136
  dcplx:  0.659136040105813
  ecplx:  0.65913604010581346745
  qcplx:  0.659136040105813467440589358547542
  ocplx:  2.189602529980304994328687735269597558929000676284406852118544598462651
  mcplx:  0.659136040105813467440589358547542577697767695990348249587362491929748218044299903855841524
sflintc:  0.6591361
dflintc:  0.659136040105813
eflintc:  0.65913604010581346745
qflintc:  0.659136040105813467440589358547543
oflintc:  0.65913604010581346744058935854754257769776769599034824958736249192974822
mflintc:  0.659136040105813467440589358547542577697767695990348249587362491929748218044299903855841524
aflintc: [0.659136040105813467440589358547542577697767695990348249587362491929748218044299903855841524 +/- 5.31e-90]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.log10p1(x))))
    fpm:  1.16727440833616
```

(continues on next page)

(continued from previous page)

```
    mpm:  1.16727440833615846635338972479496253074985037883923732140212854029118959195844078193544147
    dpm:  1.16727440833615846635338972479496253074985037883923732140212854029118959195844078193544146
    ipm: [1.16727440833615846635338972479496253074985037883923732140212854029118959195844078193544147611,
          1.16727440833615846635338972479496253074985037883923732140212854029118959195844078193544148383]
    gpm:  1.16727440833615846635338972479496253074985037883923732140212854029118959195844078193544148683
    apm: [1.16727440833615846635338972479496253074985037883923732140212854029118959195844078193544147 +/- 2.81e-90]
cmath53:  1.16727440833616
  scplx:  1.167274
  dcplx:  1.16727440833616
  ecplx:  1.1672744083361584664
  qcplx:  1.167274408336158466335338972479496
  ocplx:  3.87760165149490796500539059771526976264335636560359146878177839251773 82
  mcplx:  1.16727440833615846635338972479496253074985037883923732140212854029118959195844078193544147
sflintc:  1.167274
dflintc:  1.16727440833616
eflintc:  1.1672744083361584664
qflintc:  1.167274408336158466335338972479496
oflintc:  1.16727440833615846635338972479496253074985037883923732140212854029118 96
mflintc:  1.16727440833615846635338972479496253074985037883923732140212854029118959195844078193544147
aflintc: [1.16727440833615846635338972479496253074985037883923732140212854029118959195844078193544147 +/- 4.55e-90]
```

3.4.6 Auxiliary function $\mathrm{log2p1}(x) = \log_2(1+x)$

`ctx.log2p1(`x`)`

where `ctx` is `math53`, `mathc53`, `ctxcpp` or `ctxflint`.

Returns $\mathrm{log2p1}(x)) = \log_2(1+x) = \mathrm{log1p}(x)/\log(2)$. See also *log1p()*.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.log2p1(x)))
    fpm:  2.60880924267552
    mpm:  2.60880924267552396286018827934958452991747491580579519594539337418910950573365753259944794438867
    dpm:  2.60880924267552396286018827934958452991747491580579519594539337418910950573365753259944794438867
    ipm: [2.60880924267552396286018827934958452991747491580579519594539337418910950573365753259944794438867,
          2.60880924267552396286018827934958452991747491580579519594539337418910950573365753259944794458504]
    gpm:  2.60880924267552396286018827934958452991747491580579519594539337418910950573365753259944794444
    apm: [2.60880924267552396286018827934958452991747491580579519594539337418910950573365753259944794444 +/- 5.20e-90]
 math53:  2.60880924267552
  sreal:  2.608809
  dreal:  2.60880924267552
  ereal:  2.6088092426755239285
  qreal:  2.608809242675523926018827934958 5
  oreal:  2.60880924267552392860188279349585
  mreal:  2.60880924267552392860188279349585
 sflint:  2.608809
 dflint:  2.60880924267552
 eflint:  2.6088092426755239285
 qflint:  2.608809242675523926018827934958 5
 oflint:  2.60880924267552392860188279349585
 mflint:  2.60880924267552392860188279349585
 aflint: [2.60880924267552392860188279349585 +/- 6.91e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.log2p1(x)))
    fpm:  (2.1896025299803, 3.87760165149491)
    mpm:  (2.1896025299803049943286877352695975589290006762844, 3.87760165149490796500539059771526976264335636560 36)
cmath53:  (2.18960252998031, 3.87760165149491)
  qcplx:  (2.1896025299803049943286877352696, 3.87760165149490796500539059771527)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.log2p1(x))))
    fpm:  2.1896025299803
    mpm:  2.189602529980304994328687735269597558929000676284406852118544598462650996117318152488850078
    dpm:  2.189602529980304994328687735269597558929000676284406852118544598462650996117318152488850080
    ipm: [2.189602529980304994328687735269597558929000676284406852118544598462650996117318152488850781068 5,
          2.189602529980304994328687735269597558929000676284406852118544598462650996117318152488850783523 1]
    gpm:  2.189602529980304994328687735269597558929000676284406852118544598462650996117318152488850782 1
    apm: [2.189602529980304994328687735269597558929000676284406852118544598462650996117318152488850781 +/- 2.88e-90]
cmath53:  2.18960252998031
  scplx:  2.189602
  dcplx:  2.18960252998031
  ecplx:  2.1896025299803049 42
  qcplx:  2.189602529980304994328687735269 6
  ocplx:  2.189602529980304994328687735269597558929000676284406852118544598462651
  mcplx:  2.189602529980304994328687735269597558929000676284406852118544598462650996117318152488850078
sflintc:  2.189603
dflintc:  2.1896025299803
eflintc:  2.1896025299803049 42
qflintc:  2.189602529980304994328687735269 6
oflintc:  2.189602529980304994328687735269597558929000676284406852118544598462651
mflintc:  2.189602529980304994328687735269597558929000676284406852118544598462650996117318152488850078
aflintc: [2.189602529980304994328687735269597558929000676284406852118544598462650996117318152488850781 +/- 5.28e-90]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.log2p1(x))))
    fpm:  3.87760165149491
    mpm:  3.877601651494907965005390597715269762643356365603591468781778392517738206931894852077560 52
    dpm:  3.877601651494907965005390597715269762643356365603591468781778392517738206931894852077560 52
    ipm: [3.877601651494907965005390597715269762643356365603591468781778392517738206931894852077560 5223233,
          3.877601651494907965005390597715269762643356365603591468781778392517738206931894852077560 5257596]
    gpm:  3.877601651494907965005390597715269762643356365603591468781778392517738206931894852077560 5238
    apm: [3.877601651494907965005390597715269762643356365603591468781778392517738206931894852077560 52 +/- 5.03e-90]
cmath53:  3.87760165149491
  scplx:  3.877602
  dcplx:  3.87760165149491
  ecplx:  3.8776016514949079 51
  qcplx:  3.877601651494907965005390597715 7
  ocplx:  3.877601651494907965005390597715269762643356365603591468781778392517738 2
  mcplx:  3.877601651494907965005390597715269762643356365603591468781778392517738206931894852077560 52
sflintc:  3.877602
dflintc:  3.87760165149491
eflintc:  3.8776016514949079 51
qflintc:  3.877601651494907965005390597715 7
oflintc:  3.877601651494907965005390597715269762643356365603591468781778392517738 2
mflintc:  3.877601651494907965005390597715269762643356365603591468781778392517738206931894852077560 52
aflintc: [3.877601651494907965005390597715269762643356365603591468781778392517738206931894852077560 52 +/- 5.94e-90]
```

3.5 Power functions

3.5.1 Square, x^2

`ctx.sqr(x)`

where `ctx` is `math53`, `mathc53`, `ctxcpp` or `ctxflint`.

Returns the square function of x, x^2. See also Wikipedia [1240], MathWorld [852], Ehrhardt [295] (4.1.18).

Returns the square function of x, x^2. See also Wikipedia [1240], MathWorld [852], Ehrhardt [295] (4.1.18).

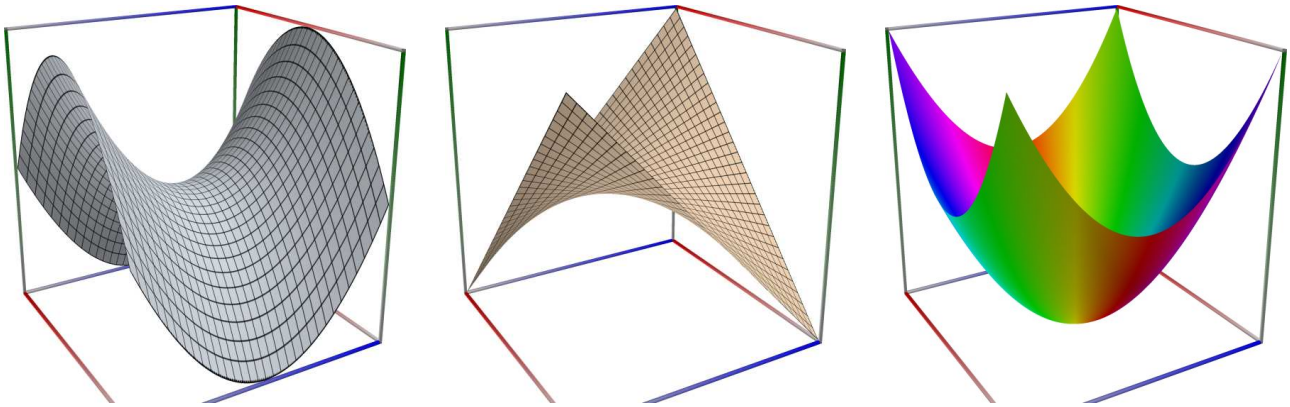

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \leq x \leq 6$ (blue axis), $-6 \leq y \leq 6$ (red axis), $-10 \leq z \leq 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.sqr(x)))
    fpm:  26.01
    mpm:  26.01
    dpm:  26.01
    ipm: [26.009999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999989318,
          26.010000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000005027]
    gpm:  26.010000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000001
    apm: [26.010000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000 +/- 2.47e-89]
 math53:  26.01
  sreal:  26.01
  dreal:  26.01
  ereal:  26.009999999999999998
  qreal:  26.01
  oreal:  26.01
  mreal:  26.01
 sflint:  26.01
 dflint:  26.01
 eflint:  26.009999999999999998
 qflint:  26.01
 oflint:  26.01
 mflint:  26.01
 aflint: [26.010000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000 +/- 3.45e-89]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.sqr(x)))
    fpm:  (22.01, -20.4)
```

(continues on next page)

(continued from previous page)

```
    mpm:  (22.01, -20.4)
cmath53:  (22.01, -20.4)
  qcplx:  (22.01, -20.4)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.sqr(x))))
    fpm:  22.01
    mpm:  22.01
    dpm:  22.01
    ipm: [22.009999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999989318,
          22.010000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000005027]
    gpm:  22.010000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000001
    apm: [22.010000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000 +/- 2.47e-89]
cmath53:  22.01
  scplx:  22.01
  dcplx:  22.01
  ecplx:  22.009999999999999998
  qcplx:  22.01
  ocplx:  22.01
  mcplx:  22.01
sflintc:  22.01
dflintc:  22.01
eflintc:  22.009999999999999998
qflintc:  22.01
oflintc:  22.01
mflintc:  22.01
aflintc: [22.010000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000 +/- 3.45e-89]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.sqr(x))))
    fpm:  -20.4
    mpm:  -20.4
    dpm:  -20.40
    ipm: [-20.400000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000785,
          -20.399999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999996858]
    gpm:  -20.400000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000001
    apm: [-20.400000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000 +/- 7.08e-90]
cmath53:  -20.4
  scplx:  -20.4
  dcplx:  -20.4
  ecplx:  -20.4
  qcplx:  -20.4
  ocplx:  -20.4
  mcplx:  -20.4
sflintc:  -20.4
dflintc:  -20.4
eflintc:  -20.4
qflintc:  -20.4
oflintc:  -20.4
mflintc:  -20.4
aflintc: [-20.400000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000 +/- 6.29e-90]
```

3.5.2 Cube, x^3

`ctx.cube(`x`)`

where `ctx` is `math53`, `mathc53`, `ctxcpp` or `ctxflint`.

Returns the cube function of x, x^3. See also Wikipedia [1240], MathWorld [852], Ehrhardt [295] (4.1.18).

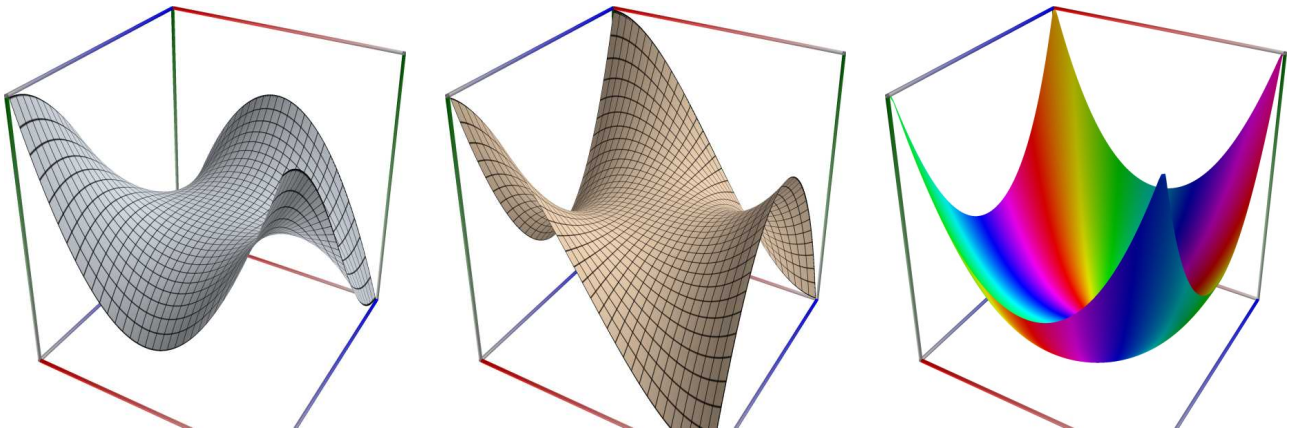

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \leq x \leq 6$ (blue axis), $-6 \leq y \leq 6$ (red axis), $-10 \leq z \leq 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.cube(x)))
    fpm:  -132.651
    mpm:  -132.651
    dpm:  -132.651
    ipm: [-132.651000000000
```

(continued from previous page)

```
    dpm:  -71.451
    ipm: [-71.451000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000050772,
          -71.450999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999925099]
    gpm:  -71.451000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000004
    apm: [-71.451000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000 +/- 1.92e-88]
cmath53:  -71.451
  scplx:  -71.45099
  dcplx:  -71.451
  ecplx:  -71.45099999999999984
  qcplx:  -71.451
  ocplx:  -71.450999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999
  mcplx:  -71.450999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999
sflintc:  -71.451
dflintc:  -71.451
eflintc:  -71.45099999999999991
qflintc:  -71.451
oflintc:  -71.450999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999
mflintc:  -71.450999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999
aflintc: [-71.451000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000 +/- 2.70e-88]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.cube(x))))
    fpm:  148.06
    mpm:  148.06
    dpm:  148.060
    ipm: [148.059999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999993591,
          148.060000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000003016]
    gpm:  148.06
    apm: [148.060000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000 +/- 1.64e-88]
cmath53:  148.06
  scplx:  148.06
  dcplx:  148.06
  ecplx:  148.06
  qcplx:  148.06
  ocplx:  148.06
  mcplx:  148.06
sflintc:  148.06
dflintc:  148.06
eflintc:  148.06
qflintc:  148.06
oflintc:  148.06
mflintc:  148.06
aflintc: [148.060000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000 +/- 3.64e-88]
```

3.5.3 Auxiliary function $\mathrm{pow_si}(x, n) = x^n$

`ctx.`**`pow_si`**(x, n)

where `ctx` is `math53`, `mathc53`, `ctxcpp` or `ctxflint`.

Note: ctx.intpower(x, n)

Returns the integer power function of x, x^n. See also Wikipedia [1240], MathWorld [852].

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; n = 3; gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.pow_si(x, n)))
    fpm:  -132.651
    mpm:  -132.651
```

(continues on next page)

(continued from previous page)

```
    dpm:  -132.65099999999998
    ipm: [-132.651000000000
```

(continued from previous page)

```
    dpm:  148.06
    ipm: [148.059999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999874,
          148.060000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000003016]
    gpm:  148.06
    apm: [148.060000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000 +/- 3.27e-89]
cmath53:  148.06
  scplx:  148.06
  dcplx:  148.06
  ecplx:  148.06
  qcplx:  148.06
  ocplx:  148.059999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999996
  mcplx:  148.06
sflintc:  4.519025E-39
dflintc:  148.06
eflintc:  148.06
qflintc:  148.06
oflintc:  148.06
mflintc:  148.06
aflintc: [148.060000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000 +/- 3.64e-88]
```

3.5.4 Auxiliary function $\mathrm{hypot}(x, y) = \sqrt{x^2 + y^2}$

`ctx.`**`hypot`**(x, y)

where `ctx` is `math53`, `mathc53`, `ctxcpp` or `ctxflint`.

Returns $\mathrm{hypot}(x, y) = \sqrt{x^2 + y^2}$ in a way which avoids undue underflow and overflow. See also Wikipedia [1281], BoostMath [122], Mpmath [612].

The function is even and symmetric in x and y, so we assume $x, y > 0$ and $x > y$ (we can permute the arguments if this is not the case). Then the result is calculated as:

$$\mathrm{hypot}(x, y) = x\sqrt{1 + \left(\frac{y}{x}\right)^2}$$

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; y = 2.7; gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.hypot(x, y)))
    fpm:  5.7706152185014
    mpm:  5.770615218501403425556608876364012162134560127335884371696995679032531741548371097202051 91
    dpm:  5.770615218501403425556608876364012162134560127335884371696995679032531741548371097202051 91
    ipm: [5.770615218501403425556608876364012162134560127335884371696995679032531741548371097202051 9049521,
          5.770615218501403425556608876364012162134560127335884371696995679032531741548371097202051 9078976]
    gpm:  5.770615218501403425556608876364012162134560127335884371696995679032531741548371097202051 9069
    apm: [5.770615218501403425556608876364012162134560127335884371696995679032531741548371097202051 90 +/- 8.14e-90]
 math53:  5.7706152185014
  sreal:  5.770615
  dreal:  5.7706152185014
  ereal:  5.7706152185014034255
  qreal:  5.770615218501403425556608876364 01
  oreal:  5.770615218501403425556608876364012162134560127335884371696995679032531 8
  mreal:  5.770615218501403425556608876364012162134560127335884371696995679032531741548371097202051 9
 sflint:  5.770615
 dflint:  5.7706152185014
 eflint:  5.7706152185014034255
 qflint:  5.770615218501403425556608876364 01
 oflint:  5.770615218501403425556608876364012162134560127335884371696995679032531 7
 mflint:  5.770615218501403425556608876364012162134560127335884371696995679032531741548371097202051 9
 aflint: [5.770615218501403425556608876364012162134560127335884371696995679032531741548371097202051 9 +/- 1.01e-89]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  y = 2.7+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.hypot(x, y)))
    fpm:  (5.11664530016834, -0.938114666623866)
    mpm:  (5.116645300168344504948123525114234598689481126408327388241199193534806154611601883008532402621
7, -0.938114666623866530451628384263441983600277693844)
cmath53:  (5.11664530016834, -0.938114666623866)
  qcplx:  (5.116645300168344504948123525114234598689481126408327388241199193534806154611601883008532402621
7, -0.938114666623866530451628384263442)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  y = 2.7+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.hypot(x, y))))
    fpm:  5.11664530016834
    mpm:  5.116645300168344504948123525114234598689481126408327388241199193534806154611601883008532402621
7
    dpm:  5.116645300168344504948123525114234598689481126408327388241199193534806154611601883008532402621
7
    ipm: [5.116645300168344504948123525114234598689481126408327388241199193534806154611601883008532402621
7,
          5.116645300168344504948123525114234598689481126408327388241199193534806154611601883008532405567
2]
    gpm:  5.116645300168344504948123525114234598689481126408327388241199193534806154611601883008532404
6
    apm: [5.116645300168344504948123525114234598689481126408327388241199193534806154611601883008532400
+/- 5.77e-90]
cmath53:  5.11664530016834
  scplx:  5.116645
  dcplx:  5.11664530016834
  ecplx:  5.1166453001683445049
  qcplx:  5.116645300168344504948123525114234
  ocplx:  5.116645300168344504948123525114234598689481126408327388241199193534806
  mcplx:  5.116645300168344504948123525114234598689481126408327388241199193534806154611601883008532402621
7
sflintc:  5.116645
dflintc:  5.11664530016834
eflintc:  5.1166453001683445049
qflintc:  5.116645300168344504948123525114234
oflintc:  5.116645300168344504948123525114234598689481126408327388241199193534806
mflintc:  5.116645300168344504948123525114234598689481126408327388241199193534806154611601883008532402621
7
aflintc: [5.116645300168344504948123525114234598689481126408327388241199193534806154611601883008532400
+/- 8.85e-90]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  y = 2.7+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.hypot(x, y))))
    fpm:  -0.938114666623866
    mpm:  -0.938114666623866530451628384263441983600277693844506560331411415997183372381594846707070
56
    dpm:  -0.938114666623866530451628384263441983600277693844506560331411415997183372381594846707070
56
    ipm: [-0.938114666623866530451628384263441983600277693844506560331411415997183372381594846707070
56075431,
          -0.938114666623866530451628384263441983600277693844506560331411415997183372381594846707070
5589134]
    gpm:  -0.938114666623866530451628384263441983600277693844506560331411415997183372381594846707070
56002
    apm: [-0.938114666623866530451628384263441983600277693844506560331411415997183372381594846707070
56 +/- 1.20e-90]
cmath53:  -0.938114666623866
  scplx:  -0.9381146
  dcplx:  -0.938114666623866
  ecplx:  -0.93811466662386653042
  qcplx:  -0.938114666623866530451628384263442
  ocplx:  -0.938114666623866530451628384263441983600277693844506560331411415997183
  mcplx:  -0.938114666623866530451628384263441983600277693844506560331411415997183372381594846707070
56
sflintc:  -0.9381146
dflintc:  -0.938114666623866
eflintc:  -0.93811466662386653042
qflintc:  -0.938114666623866530451628384263442
oflintc:  -0.938114666623866530451628384263441983600277693844506560331411415997183
mflintc:  -0.938114666623866530451628384263441983600277693844506560331411415997183372381594846707070
56
aflintc: [-0.938114666623866530451628384263441983600277693844506560331411415997183372381594846707070
56 +/- 1.90e-90]
```

3.5.5 Power function, $\mathrm{pow}(x, y) = x^y$

ctx.pow(x, y)

where ctx is math53, mathc53, ctxcpp, ctxflint.

Returns $x^y = \exp(y \log(x))$. See also Wikipedia [1245], Wikipedia [1232], MathWorld [849], NIST [487], Ehrhardt [295] (4.2.34), Flint [741], Flint [731], Mpmath [553].

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; y = 2.7; gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.pow(x, y)))
    fpm:  81.3653459776671
    mpm:  81.365345977667140908520270055551977867592035439869660318922788666865104526243488149411853100 8505,
          81.365345977667140908520270055551977867592035439869660318922788666865104526243488149411853134178]
    gpm:  81.365345977667140908520270055551977867592035439869660318922788666865104526243488149411853056
    apm: [81.365345977667140908520270055551977867592035439869660318922788666865104526243488149411853 +/- 3.12e-88]
 math53:  81.3653459776671
  sreal:  81.36535
  dreal:  81.3653459776672
  ereal:  81.365345977667140928
  qreal:  81.365345977667140908520270055552
  oreal:  81.36534597766714090852027005555197786759203543986966031892278866686510 4
  mreal:  81.365345977667140908520270055551977867592035439869660318922788666865104526243488149411853100 8531
 sflint:  81.36535
 dflint:  81.3653459776671
 eflint:  81.365345977667140907
 qflint:  81.365345977667140908520270055552
 oflint:  81.36534597766714090852027005555197786759203543986966031892278866686510 5
 mflint:  81.365345977667140908520270055551977867592035439869660318922788666865104526243488149411853100 8531
 aflint: [81.365345977667140908520270055551977867592035439869660318922788666865104526243488149411853 +/- 3.36e-87]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  y = 2.7+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.pow(x, y)))
    fpm:  (-0.0469032107691508, -0.386362154511975)
    mpm:  (-0.046903210769150875001497368152121275686709744485576301812036288523115669914805538652691566672, -0.386362154511975390894853348241885 2)
cmath53:  (-0.0469032107691505, -0.386362154511975)
  qcplx:  (-0.046903210769150875001497368152127 4, -0.386362154511975390894853348241885)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  y = 2.7+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.pow(x, y))))
    fpm:  -0.0469032107691508
    mpm:  -0.046903210769150875001497368152127568670974448557630181203628852311566991480553865269156667 3
    dpm:  -0.046903210769150875001497368152127568670974448557630181203628852311566991480553865269156667 2
    ipm: [-0.046903210769150875001497368152127568670974448557630181203628852311566991480553865269156667 551027,
          -0.046903210769150875001497368152127568670974448557630181203628852311566991480553865269156667 53299]
    gpm:  -0.046903210769150875001497368152127568670974448557630181203628852311566991480553865269156667 298
    apm: [-0.046903210769150875001497368152127568670974448557630181203628852311566991480553865269156667 +/- 4.51e-90]
cmath53:  -0.0469032107691505
  scplx:  -0.04690291
  dcplx:  -0.0469032107691505
  ecplx:  -0.046903210769150874999
  qcplx:  -0.046903210769150875001497368152127 4
  ocplx:  -0.046903210769150875001497368152127568670974448557630181203628852311567044
  mcplx:  -0.046903210769150875001497368152127568670974448557630181203628852311566991480553865269156667
sflintc:  -0.04690318
```

(continues on next page)

(continued from previous page)

```
dflintc:  -0.0469032107691508
eflintc:  -0.04690321076915087500149736815212756867097444855763018120362885231156699148055386526915667
qflintc:  -0.0469032107691508750014973681521275
oflintc:  -0.04690321076915087500149736815212756867097444855763018120362885231156699148055386526915667
mflintc:  -0.04690321076915087500149736815212756867097444855763018120362885231156699148055386526915667
aflintc: [-0.04690321076915087500149736815212756867097444855763018120362885231156699148055386526915667 +/- 7.15e-90]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  y = 2.7+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.pow(x, y))))
    fpm:  -0.386362154511975
    mpm:  -0.38636215451197539089485334824188527398818979599994095671036572615411361935132189509952375 7
    dpm:  -0.38636215451197539089485334824188527398818979599994095671036572615411361935132189509952375 8
    ipm: [-0.38636215451197539089485334824188527398818979599994095671036572615411361935132189509952375 792933,
          -0.38636215451197539089485334824188527398818979599994095671036572615411361935132189509952375 725433]
    gpm:  -0.38636215451197539089485334824188527398818979599994095671036572615411361935132189509952375 75
    apm: [-0.38636215451197539089485334824188527398818979599994095671036572615411361935132189509952376 +/- 4.37e-90]
cmath53:  -0.386362154511975
  scplx:  -0.3863623
  dcplx:  -0.386362154511975
  ecplx:  -0.38636215451197539086
  qcplx:  -0.3863621545119753908948533482418852
  ocplx:  -0.38636215451197539089485334824188527398818979599994095671036572615411354
  mcplx:  -0.38636215451197539089485334824188527398818979599994095671036572615411361935132189509952375 8
sflintc:  -0.3863622
dflintc:  -0.386362154511975
eflintc:  -0.38636215451197539092
qflintc:  -0.3863621545119753908948533482418852
oflintc:  -0.38636215451197539089485334824188527398818979599994095671036572615411362
mflintc:  -0.38636215451197539089485334824188527398818979599994095671036572615411361935132189509952375 8
aflintc: [-0.38636215451197539089485334824188527398818979599994095671036572615411361935132189509952376 +/- 7.19e-90]
```

3.5.6 Auxiliary function, $\mathrm{powm1}(x, y) = x^y - 1$

`ctx.powm1`(a, b)

where `ctx` is `math53`, `mathc53`, `ctxcpp` or `ctxflint`.

Returns $a^b - 1$, computed accurately also when a^b is very close to 1. This is calculated as $\mathrm{powm1}(a, b) = \mathrm{expm1}(b\log(a))$. See also Wikipedia [1232], MathWorld [849], NIST [487], BoostMath [91], Mpmath [616].

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; y = 2.7; gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.powm1(x, y)))
    fpm:  80.3653459776671
    mpm:  80.365345977667140908520270055551977867592035439869660318922788666865104526243488149411853 1
    dpm:  80.365345977667140908520270055551977867592035439869660318922788666865104526243488149411853 1
    ipm: [80.365345977667140908520270055551977867592035439869660318922788666865104526243488149411853 008505,
          80.365345977667140908520270055551977867592035439869660318922788666865104526243488149411853 134178]
    gpm:  80.365345977667140908520270055551977867592035439869660318922788666865104526243488149411853 103
    apm: [80.365345977667140908520270055551977867592035439869660318922788666865104526243488149411853 +/- 3.12e-88]
 math53:  80.3653459776671
  sreal:  80.36536
  dreal:  80.3653459776672
  ereal:  80.365345977667140887
  qreal:  80.365345977667140908520270055552
  oreal:  80.365345977667140908520270055551977867592035439869660318922788666865104
  mreal:  80.365345977667140908520270055551977867592035439869660318922788666865104526243488149411853
 sflint:  80.36535
 dflint:  80.3653459776671
```

(continues on next page)

(continued from previous page)

```
 eflint:  80.365345977667140907
 qflint:  80.365345977667140908520270055552
 oflint:  80.365345977667140908520270055551977867592035439869660318922788666865105
 mflint:  80.365345977667140908520270055551977867592035439869660318922788666865104526243488149411853
 aflint: [80.365345977667140908520270055551977867592035439869660318922788666865104526243488149411853 +/- 3.36e-87]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  y = 2.7+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.powm1(x, y)))
    fpm:  (-1.04690321076915, -0.386362154511975)
    mpm:  (-1.0469032107691508750014973681521275686709744485576301812036288523115669914805538652691566677351, -0.3863621545119753908948533482418852739881897959999409567103657261541136193513218950995237579293
3)
cmath53:  (-1.04690321076915, -0.386362154511975)
  qcplx:  (-1.0469032107691508750014973681521275686709744485576301812036288523115669914805538652691566677351, -0.3863621545119753908948533482418852739881897959999409567103657261541136193513218950995237579293
3)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  y = 2.7+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.powm1(x, y))))
    fpm:  -1.04690321076915
    mpm:  -1.0469032107691508750014973681521275686709744485576301812036288523115669914805538652691566677351
    dpm:  -1.0469032107691508750014973681521275686709744485576301812036288523115669914805538652691566677351
    ipm: [-1.0469032107691508750014973681521275686709744485576301812036288523115669914805538652691566677351,
          -1.0469032107691508750014973681521275686709744485576301812036288523115669914805538652691566667533]
    gpm:  -1.0469032107691508750014973681521275686709744485576301812036288523115669914805538652691566677
    apm: [-1.0469032107691508750014973681521275686709744485576301812036288523115669914805538652691566677351 +/- 4.97e-90]
cmath53:  -1.04690321076915
  scplx:  -1.046903
  dcplx:  -1.04690321076915
  ecplx:  -1.046903210769150875
  qcplx:  -1.0469032107691508750014973681521275
  ocplx:  -1.0469032107691508750014973681521275686709744485576301812036288523115669914805538652691566677351
  mcplx:  -1.0469032107691508750014973681521275686709744485576301812036288523115669914805538652691566677351
sflintc:  -1.046903
dflintc:  -1.04690321076915
eflintc:  -1.046903210769150875
qflintc:  -1.0469032107691508750014973681521275
oflintc:  -1.0469032107691508750014973681521275686709744485576301812036288523115669914805538652691566677351
mflintc:  -1.0469032107691508750014973681521275686709744485576301812036288523115669914805538652691566677351
aflintc: [-1.0469032107691508750014973681521275686709744485576301812036288523115669914805538652691566677351 +/- 8.08e-90]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  y = 2.7+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.powm1(x, y))))
    fpm:  -0.386362154511975
    mpm:  -0.3863621545119753908948533482418852739881897959999409567103657261541136193513218950995237579293
3
    dpm:  -0.3863621545119753908948533482418852739881897959999409567103657261541136193513218950995237579293
3
    ipm: [-0.3863621545119753908948533482418852739881897959999409567103657261541136193513218950995237579293
3,
          -0.3863621545119753908948533482418852739881897959999409567103657261541136193513218950995237572543
3]
    gpm:  -0.3863621545119753908948533482418852739881897959999409567103657261541136193513218950995237575
    apm: [-0.3863621545119753908948533482418852739881897959999409567103657261541136193513218950995237579293
3 +/- 4.21e-90]
cmath53:  -0.386362154511975
  scplx:  -0.3863623
  dcplx:  -0.386362154511975
  ecplx:  -0.38636215451197539086
  qcplx:  -0.3863621545119753908948533482418852739881897959999409567103657261541136193513218950995237579293
3
  ocplx:  -0.3863621545119753908948533482418852739881897959999409567103657261541136193513218950995237579293
3
  mcplx:  -0.3863621545119753908948533482418852739881897959999409567103657261541136193513218950995237579293
3
sflintc:  -0.3863622
dflintc:  -0.386362154511975
```

(continues on next page)

(continued from previous page)

```
eflintc:  -0.38636215451197539092
qflintc:  -0.3863621545119753908948533482418852739881897959999409567103657261541136193513218950995237 57
oflintc:  -0.3863621545119753908948533482418852739881897959999409567103657261541136193513218950995237 57362615411362
mflintc:  -0.3863621545119753908948533482418852739881897959999409567103657261541136193513218950995237 57362615411362
aflintc: [-0.3863621545119753908948533482418852739881897959999409567103657261541136193513218950995237 57362615411362 +/- 6.06e-90]
```

3.5.7 Auxiliary function, $\mathrm{pow1p}(x, y) = (1 + x)^y$

`ctx.pow1p`(x, y)

where `ctx` is `math53`, `mathc53`, `ctxcpp` or `ctxflint`.

Returns $(1 + x)^y$. This is calculated as $\mathrm{pow1p}(x, y) = \exp(y \cdot \mathrm{logp1}(x))$.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; y = 2.7; gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.pow1p(x, y)))
    fpm:  131.944276032173
    mpm:  131.944276032172497343402838456979202538134016048414534495031832195061071270833427423816 15
    dpm:  131.944276032172497343402838456979202538134016048414534495031832195061071270833427423816 15
    ipm: [131.944276032172497343402838456979202538134016048414534495031832195061071270833427423816 14953219,
          131.944276032172497343402838456979202538134016048414534495031832195061071270833427423816 14997204]
    gpm:  131.944276032172497343402838456979202538134016048414534495031832195061071270833427423816 14969
    apm: [131.944276032172497343402838456979202538134016048414534495031832195061071270833427423816150 +/- 8.91e-88]
 math53:  131.944276032172
  sreal:  131.9443
  dreal:  131.944276032172
  ereal:  131.94427603217249736
  qreal:  131.944276032172497343402838456979
  oreal:  131.9442760321724973434028384569792025381340160484145344950318321950610 9
  mreal:  131.944276032172497343402838456979202538134016048414534495031832195061071270833427423816 15
 sflint:  131.9443
 dflint:  131.944276032173
 eflint:  131.94427603217249735
 qflint:  131.944276032172497343402838456979
 oflint:  131.94427603217249734340283845697920253813401604841453449503183219506107
 mflint:  131.944276032172497343402838456979202538134016048414534495031832195061071270833427423816 15
 aflint: [131.944276032172497343402838456979202538134016048414534495031832195061071270833427423816 15 +/- 1.92e-87]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  y = 2.7+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.pow1p(x, y)))
    fpm:  (-0.180221098196722, -0.212573367986055)
    mpm:  (-0.180221098196722205296316255511334219961 66, -0.212573367986055339037645246111566325 3144)
cmath53:  (-0.180221098196722, -0.212573367986055)
  qcplx:  (-0.180221098196722052963162555113342, -0.212573367986055339037645246111566)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  y = 2.7+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.pow1p(x, y))))
    fpm:  -0.180221098196722
    mpm:  -0.180221098196722052963162555113342199616670348405585894679018636234977192484522103015955 02
    dpm:  -0.180221098196722052963162555113342199616670348405585894679018636234977192484522103015955 02
    ipm: [-0.180221098196722052963162555113342199616670348405585894679018636234977192484522103015955 02107675,
          -0.180221098196722052963162555113342199616670348405585894679018636234977192484522103015955 01920516]
    gpm:  -0.180221098196722052963162555113342199616670348405585894679018636234977192484522103015955 01979
    apm: [-0.180221098196722052963162555113342199616670348405585894679018636234977192484522103015955 02 +/- 2.94e-90]
cmath53:  -0.180221098196722
```

(continues on next page)

(continued from previous page)

```
  scplx:  -0.180221
  dcplx:  -0.180221098196722
  ecplx:  -0.18022109819672205294
  qcplx:  -0.180221098196722052963162555113342
  ocplx:  -0.180221098196722052963162555113342199616670348405585894679018636234977
  mcplx:  -0.180221098196722052963162555113342199616670348405585894679018636234977192484522103015955021
sflintc:  -0.1802211
dflintc:  -0.180221098196722
eflintc:  -0.18022109819672205296
qflintc:  -0.180221098196722052963162555113342
oflintc:  -0.180221098196722052963162555113342199616670348405585894679018636234977
mflintc:  -0.180221098196722052963162555113342199616670348405585894679018636234977192484522103015955021
aflintc: [-0.180221098196722052963162555113342199616670348405585894679018636234977192484522103015955021 +/- 6.29e-90]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  y = 2.7+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.pow1p(x, y))))
    fpm:  -0.212573367986055
    mpm:  -0.212573367986055339037645246111566324314396148886342394488829928948834104543120098639548998
    dpm:  -0.212573367986055339037645246111566324314396148886342394488829928948834104543120098639548998
    ipm: [-0.212573367986055339037645246111566324314396148886342394488829928948834104543120098639548998882988,
          -0.212573367986055339037645246111566324314396148886342394488829928948834104543120098639548997708102]
    gpm:  -0.212573367986055339037645246111566324314396148886342394488829928948834104543120098639548997794
    apm: [-0.212573367986055339037645246111566324314396148886342394488829928948834104543120098639548900 +/- 4.95e-90]
cmath53:  -0.212573367986055
  scplx:  -0.2125735
  dcplx:  -0.212573367986055
  ecplx:  -0.21257336798605533902
  qcplx:  -0.212573367986055339037645246111566
  ocplx:  -0.212573367986055339037645246111566324314396148886342394488829928948834104543120098639548997
  mcplx:  -0.212573367986055339037645246111566324314396148886342394488829928948834104543120098639548997
sflintc:  -0.2125734
dflintc:  -0.212573367986055
eflintc:  -0.21257336798605533906
qflintc:  -0.212573367986055339037645246111566
oflintc:  -0.212573367986055339037645246111566324314396148886342394488829928948834104543120098639548997
mflintc:  -0.212573367986055339037645246111566324314396148886342394488829928948834104543120098639548997
aflintc: [-0.212573367986055339037645246111566324314396148886342394488829928948834104543120098639548900 +/- 7.46e-90]
```

3.5.8 Auxiliary function, $\mathrm{pow1pm1}(x, y) = (1 + x)^y - 1$

`ctx.pow1pm1`(x, y)

where `ctx` is `math53`, `mathc53`, `ctxcpp` or `ctxflint`.

Returns $(1 + x)^y - 1, x > -1$, special code for small x, y.

This is calculated as $\mathrm{pow1pm1}(x, y) = \mathrm{expm1}(y \cdot \mathrm{logp1}(x))$.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; y = 2.7; gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.pow1pm1(x, y)))
    fpm:  130.944276032173
    mpm:  130.944276032172497343402838456979202538134016048414534495031832195061071270833427423816150
    dpm:  130.944276032172497343402838456979202538134016048414534495031832195061071270833427423816150
    ipm: [130.944276032172497343402838456979202538134016048414534495031832195061071270833427423816149532190,
          130.944276032172497343402838456979202538134016048414534495031832195061071270833427423816149972040]
    gpm:  130.944276032172497343402838456979202538134016048414534495031832195061071270833427423816149690
    apm: [130.944276032172497343402838456979202538134016048414534495031832195061071270833427423816150 +/- 8.91e-88]
 math53:  130.944276032173
```

(continues on next page)

(continued from previous page)

```
  sreal:  130.9443
  dreal:  130.944276032172
  ereal:  130.94427603217249736
  qreal:  130.944276032172497343402838456979
  oreal:  130.9442760321724973434028384569792025381340160484145344950318321950610712708334274238161 5
  mreal:  130.9442760321724973434028384569792025381340160484145344950318321950610712708334274238161 5
 sflint:  130.9443
 dflint:  130.944276032173
 eflint:  130.94427603217249735
 qflint:  130.944276032172497343402838456979
 oflint:  130.9442760321724973434028384569792025381340160484145344950318321950610712708334274238161 5
 mflint:  130.9442760321724973434028384569792025381340160484145344950318321950610712708334274238161 5
 aflint: [130.9442760321724973434028384569792025381340160484145344950318321950610712708334274238161 5 +/- 1.92e-87]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  y = 2.7+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.pow1pm1(x, y)))
    fpm:  (-1.18022109819672, -0.212573367986055)
    mpm:  (-1.180221098196722052963162555113342199617, -0.212573367986055339037645246111566324 3144)
cmath53:  (-1.18022109819672, -0.212573367986055)
  qcplx:  (-1.180221098196722052963162555113342, -0.212573367986055339037645246111566)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  y = 2.7+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.pow1pm1(x, y))))
    fpm:  -1.18022109819672
    mpm:  -1.180221098196722052963162555113342199616670348405585894679018636234977192484522103015955 02
    dpm:  -1.180221098196722052963162555113342199616670348405585894679018636234977192484522103015955 02
    ipm: [-1.180221098196722052963162555113342199616670348405585894679018636234977192484522103015955 0212915,
          -1.180221098196722052963162555113342199616670348405585894679018636234977192484522103015955 0190824]
    gpm:  -1.180221098196722052963162555113342199616670348405585894679018636234977192484522103015955 0198
    apm: [-1.180221098196722052963162555113342199616670348405585894679018636234977192484522103015955 02 +/- 3.00e-90]
cmath53:  -1.18022109819672
  scplx:  -1.180221
  dcplx:  -1.18022109819672
  ecplx:  -1.180221098196722053
  qcplx:  -1.180221098196722052963162555113334
  ocplx:  -1.180221098196722052963162555113342199616670348405585894679018636234977 2
  mcplx:  -1.180221098196722052963162555113342199616670348405585894679018636234977192484522103015955 02
sflintc:  -1.180221
dflintc:  -1.18022109819672
eflintc:  -1.180221098196722053
qflintc:  -1.180221098196722052963162555113334
oflintc:  -1.180221098196722052963162555113342199616670348405585894679018636234977 2
mflintc:  -1.180221098196722052963162555113342199616670348405585894679018636234977192484522103015955 02
aflintc: [-1.180221098196722052963162555113342199616670348405585894679018636234977192484522103015955 02 +/- 6.51e-90]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  y = 2.7+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.pow1pm1(x, y))))
    fpm:  -0.212573367986055
    mpm:  -0.212573367986055339037645246111566324314396148886342394488829928948834104543120098639548998
    dpm:  -0.212573367986055339037645246111566324314396148886342394488829928948834104543120098639548998
    ipm: [-0.212573367986055339037645246111566324314396148886342394488829928948834104543120098639548998 82988,
          -0.212573367986055339037645246111566324314396148886342394488829928948834104543120098639548997 08102]
    gpm:  -0.212573367986055339037645246111566324314396148886342394488829928948834104543120098639548997 94
    apm: [-0.212573367986055339037645246111566324314396148886342394488829928948834104543120098639548990 00 +/- 4.81e-90]
cmath53:  -0.212573367986055
```

(continues on next page)

(continued from previous page)

```
  scplx:  -0.2125735
  dcplx:  -0.212573367986055
  ecplx:  -0.21257336798605533902
  qcplx:  -0.212573367986055339037645246111566
  ocplx:  -0.21257336798605533903764524611156632431439614888634239448882992894883410454312009863954899 7
  mcplx:  -0.212573367986055339037645246111566324314396148886342394488829928948834104543120098639548997
sflintc:  -0.2125734
dflintc:  -0.212573367986055
eflintc:  -0.21257336798605533906
qflintc:  -0.212573367986055339037645246111566
oflintc:  -0.21257336798605533903764524611156632431439614888634239448882992894883411
mflintc:  -0.212573367986055339037645246111566324314396148886342394488829928948834104543120098639548997
aflintc: [-0.212573367986055339037645246111566324314396148886342394488829928948834104543120098639549000 +/- 7.46e-90]
```

3.6 Trigonometric functions, in radians

For a general introduction to trigonometric functions, see Wikipedia [1242], NIST [490].

3.6.1 Sine, $\sin(x)$

`ctx.sin(x)`

where `ctx` is `ctx_pm` (see *Python contexts* for details), `ctx53`, `ctxcpp`, `ctxflint` (see *.NET contexts* for details). The corresponding `ctx` python lists are `ctxlistreal` and `ctxlistcplx`.

Returns the sine of x, $\sin(x)$. See also Wikipedia [1239], MathWorld [870], NIST [490], Ehrhardt [295] (4.2.55), Flint [742], Flint [732], Mpmath [555].

The sine can be defined as $\sin(x) = x - \frac{x^3}{3!} + \frac{x^5}{5!} - \frac{x^7}{7!} + \cdots = \sum_{n=0}^{\infty} \frac{(-1)^n}{(2n+1)!} x^{2n+1}$.

The complex sine can be expressed in terms of related real functions:

$$\sin(z) = \sin(x+iy) = \frac{e^{iz} - e^{-iz}}{2i} = \sin(x)\cosh(y) + i\cos(x)\sinh(y).$$

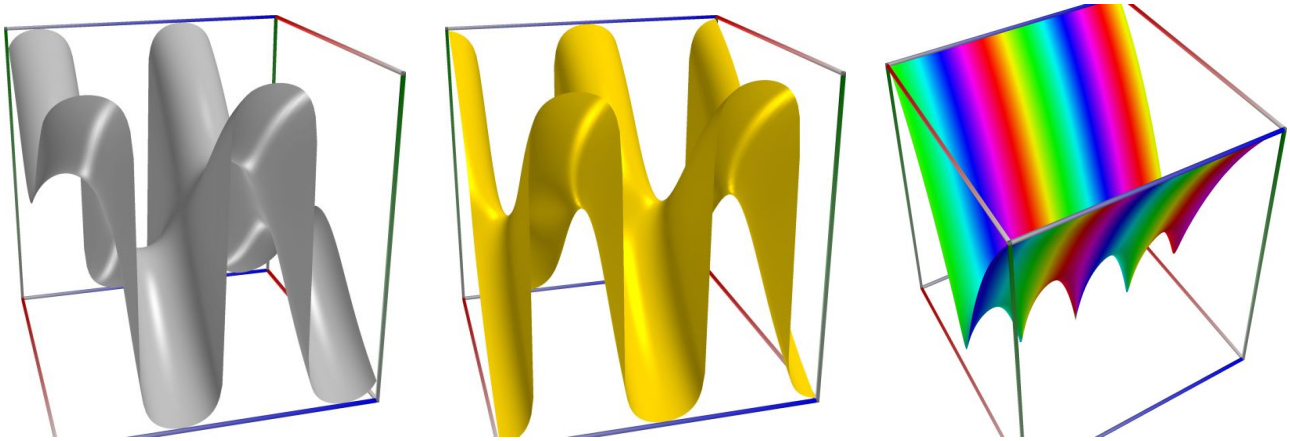

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x+iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.sin(x)))
    fpm:  0.925814682327732
    mpm:  0.92581468232773229694614624754486331250940301635560394879705455193228184723656688943690637 5
    dpm:  0.92581468232773229694614624754486331250940301635560394879705455193228184723656688943690637 5
    ipm: [0.92581468232773229694614624754486331250940301635560394879705455193228184723656688943690637503659,
          0.92581468232773229694614624754486331250940301635560394879705455193228184723656688943690637755275]
    gpm:  0.92581468232773229694614624754486331250940301635560394879705455193228184723656688943690637504
    apm: [0.92581468232773229694614624754486331250940301635560394879705455193228184723656688943690638 +/- 5.10e-90]
 math53:  0.925814682327732
  sreal:  0.9258147
  dreal:  0.925814682327732
  ereal:  0.92581468232773229699
  qreal:  0.92581468232773229694614624754486 3
  oreal:  0.92581468232773229694614624754486331250940301635560394879705455193228186
  mreal:  0.92581468232773229694614624754486331250940301635560394879705455193228184723656688943690637 6
 sflint:  0.9258147
```

(continues on next page)

(continued from previous page)

```
 dflint:  0.925814682327732
 eflint:  0.92581468232773229699
 qflint:  0.925814682327732296946146247544863
 oflint:  0.9258146823277322969461462475448633125094030163556039487970545519322818472365668894369063 76
 mflint:  0.9258146823277322969461462475448633125094030163556039487970545519322818472365668894369063 76
 aflint: [0.9258146823277322969461462475448633125094030163556039487970545519322818472365668894369063 75 +/- 9.57e-91]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.sin(x)))
    fpm:  (3.48309600859536, 1.37087251009309)
    mpm:  (3.4830960085953555305395191320496018742602081571329906610356518811477911668012326827103078133, 1.3708725100930962119067139658774871514235754109441)
cmath53:  (3.48309600859536, 1.37087251009309)
  qcplx:  (3.4830960085953555305395191320496, 1.370872510093096211906713965877487151423575410944129163310605310528913627609479426503523 6)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.sin(x))))
    fpm:  3.48309600859536
    mpm:  3.4830960085953555305395191320496018742602081571329906610356518811477911668012326827103078 1
    dpm:  3.4830960085953555305395191320496018742602081571329906610356518811477911668012326827103078 1
    ipm: [3.4830960085953555305395191320496018742602081571329906610356518811477911668012326827103078127848,
          3.4830960085953555305395191320496018742602081571329906610356518811477911668012326827103078147484]
    gpm:  3.4830960085953555305395191320496018742602081571329906610356518811477911668012326827103078133
    apm: [3.4830960085953555305395191320496018742602081571329906610356518811477911668012326827103078 1 +/- 6.64e-90]
cmath53:  3.48309600859536
  scplx:  3.483096
  dcplx:  3.48309600859536
  ecplx:  3.4830960085953555309
  qcplx:  3.4830960085953555305395191320496
  ocplx:  3.4830960085953555305395191320496018742602081571329906610356518811477912
  mcplx:  3.4830960085953555305395191320496018742602081571329906610356518811477911668012326827103078 2
sflintc:  3.483096
dflintc:  3.48309600859536
eflintc:  3.4830960085953555307
qflintc:  3.4830960085953555305395191320496
oflintc:  3.4830960085953555305395191320496018742602081571329906610356518811477912
mflintc:  3.4830960085953555305395191320496018742602081571329906610356518811477911668012326827103078 2
aflintc: [3.4830960085953555305395191320496018742602081571329906610356518811477911668012326827103078 1 +/- 8.22e-90]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.sin(x))))
    fpm:  1.37087251009309
    mpm:  1.3708725100930962119067139658774871514235754109441291633106053105289136276094794265035223 6
    dpm:  1.3708725100930962119067139658774871514235754109441291633106053105289136276094794265035223 6
    ipm: [1.3708725100930962119067139658774871514235754109441291633106053105289136276094794265035223541435,
          1.3708725100930962119067139658774871514235754109441291633106053105289136276094794265035223575799]
    gpm:  1.3708725100930962119067139658774871514235754109441291633106053105289136276094794265035223576
    apm: [1.3708725100930962119067139658774871514235754109441291633106053105289136276094794265035223 5 +/- 7.68e-90]
cmath53:  1.37087251009309
  scplx:  1.370872
  dcplx:  1.37087251009309
  ecplx:  1.3708725100930962117
  qcplx:  1.3708725100930962119067139658774 9
  ocplx:  1.3708725100930962119067139658774871514235754109441291633106053105289136
  mcplx:  1.3708725100930962119067139658774871514235754109441291633106053105289136276094794265035223 5
sflintc:  1.370872
```

(continues on next page)

(continued from previous page)

```
dflintc:  1.37087251009309
eflintc:  1.3708725100930962116
qflintc:  1.370872510093096211906713965877487151423575410944129163310605310528913627609479426503522 35
oflintc:  1.370872510093096211906713965877487151423575410944129163310605310528913627609479426503522 35
mflintc:  1.370872510093096211906713965877487151423575410944129163310605310528913627609479426503522 35
aflintc: [1.370872510093096211906713965877487151423575410944129163310605310528913627609479426503522 35 +/- 7.29e-90]
```

3.6.2 Cosine, $\cos(x)$

`ctx.cos(`x`)`

where `ctx` is `math53`, `mathc53`, `ctxcpp`, `ctxflint`.

Returns the cosine of x, $\cos(x)$. See also Wikipedia [1242], MathWorld [855], NIST [490], Ehrhardt [295] (4.2.19), Flint [742], Flint [732], Mpmath [539].

The cosine can be defined as $\cos(x) = 1 - \dfrac{x^2}{2!} + \dfrac{x^4}{4!} - \dfrac{x^6}{6!} + \cdots = \displaystyle\sum_{n=0}^{\infty} \frac{(-1)^n}{(2n)!} x^{2n}$.

The complex cosine can be expressed in terms of related real functions:

$$\cos(z) = \cos(x + iy) = \frac{e^{ix} + e^{-ix}}{2} = \cos(x)\cosh(y) - i\sin(x)\sinh(y).$$

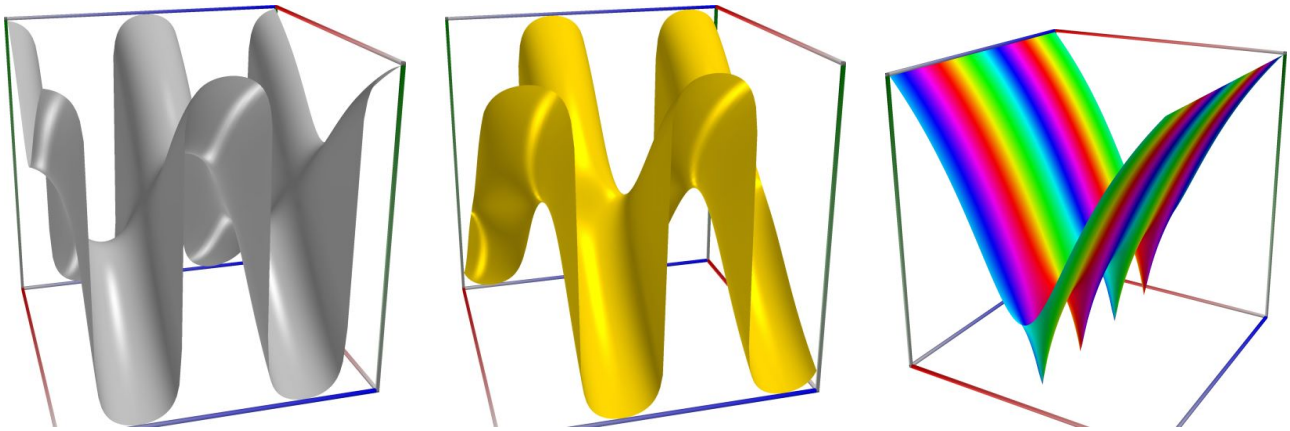

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.cos(x)))
    fpm:  0.37797774271298
    mpm:  0.377977742712980563320575552928981670898641576134277570541766913010950893251609440625897683
    dpm:  0.377977742712980563320575552928981670898641576134277570541766913010950893251609440625897683
    ipm: [0.377977742712980563320575552928981670898641576134277570541766913010950893251609440625897682 09893,
          0.377977742712980563320575552928981670898641576134277570541766913010950893251609440625897683 08075]
    gpm:  0.377977742712980563320575552928981670898641576134277570541766913010950893251609440625897683 08
    apm: [0.377977742712980563320575552928981670898641576134277570541766913010950893251609440625897683 68 +/- 3.09e-90]
 math53:  0.37797774271298
  sreal:  0.3779777
  dreal:  0.37797774271298
  ereal:  0.37797774271298056325
  qreal:  0.377977742712980563320575552928981
```

(continues on next page)

(continued from previous page)

```
  oreal:  0.377977742712980563320575552928981670898641576134277570541766913010950883251609440625897682
  mreal:  0.377977742712980563320575552928981670898641576134277570541766913010950893251609440625897682
 sflint:  0.3779777
 dflint:  0.37797774271298
 eflint:  0.37797774271298056325
 qflint:  0.377977742712980563320575552928981
 oflint:  0.377977742712980563320575552928981670898641576134277570541766913010950883251609440625897682
 mflint:  0.377977742712980563320575552928981670898641576134277570541766913010950893251609440625897682
 aflint: [0.377977742712980563320575552928981670898641576134277570541766913010950893251609440625897682 +/- 2.91e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.cos(x)))
    fpm:  (1.42202623496029, -3.35780061633792)
    mpm:  (1.42202623496029295539653936087023391246782087716702927890407713116603064238804754247398140, -3.35780061633791727720351965273158724230746525427579284280397478011945754615070264143236120)
cmath53:  (1.42202623496029, -3.35780061633792)
  qcplx:  (1.42202623496029295539653936087023, -3.35780061633791727720351965273159)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.cos(x))))
    fpm:  1.42202623496029
    mpm:  1.42202623496029295539653936087023391246782087716702927890407713116603064238804754247398140
    dpm:  1.42202623496029295539653936087023391246782087716702927890407713116603064238804754247398140
    ipm: [1.42202623496029295539653936087023391246782087716702927890407713116603064238804754247398139
          1.42202623496029295539653936087023391246782087716702927890407713116603064238804754247398140
    gpm:  1.42202623496029295539653936087023391246782087716702927890407713116603064238804754247398140
    apm: [1.42202623496029295539653936087023391246782087716702927890407713116603064238804754247398140 +/- 4.44e-90]
cmath53:  1.42202623496029
  scplx:  1.422026
  dcplx:  1.42202623496029
  ecplx:  1.4220262349602929552
  qcplx:  1.42202623496029295539653936087023
  ocplx:  1.42202623496029295539653936087023391246782087716702927890407713116603064238804754247398140
  mcplx:  1.42202623496029295539653936087023391246782087716702927890407713116603064238804754247398140
sflintc:  1.422026
dflintc:  1.42202623496029
eflintc:  1.4220262349602929551
qflintc:  1.42202623496029295539653936087023
oflintc:  1.42202623496029295539653936087023391246782087716702927890407713116603064238804754247398140
mflintc:  1.42202623496029295539653936087023391246782087716702927890407713116603064238804754247398140
aflintc: [1.42202623496029295539653936087023391246782087716702927890407713116603064238804754247398140 +/- 7.00e-90]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.cos(x))))
    fpm:  -3.35780061633792
    mpm:  -3.35780061633791727720351965273158724230746525427579284280397478011945754615070264143236120
    dpm:  -3.35780061633791727720351965273158724230746525427579284280397478011945754615070264143236120
    ipm: [-3.35780061633791727720351965273158724230746525427579284280397478011945754615070264143236119
          -3.35780061633791727720351965273158724230746525427579284280397478011945754615070264143236119
    gpm:  -3.35780061633791727720351965273158724230746525427579284280397478011945754615070264143236119
    apm: [-3.35780061633791727720351965273158724230746525427579284280397478011945754615070264143236120 +/- 5.68e-90]
cmath53:  -3.35780061633792
  scplx:  -3.357801
  dcplx:  -3.35780061633792
  ecplx:  -3.3578006163379172774
  qcplx:  -3.35780061633791727720351965273159
```

(continues on next page)

(continued from previous page)

```
  ocplx:  -3.3578006163379172772035196527315872423074652542757928428039747801194576
  mcplx:  -3.3578006163379172772035196527315872423074652542757928428039747801194575461507026414323612
sflintc:  -3.357801
dflintc:  -3.35780061633792
eflintc:  -3.357800616337917 2774
qflintc:  -3.3578006163379172772035196527 3159
oflintc:  -3.3578006163379172772035196527315872423074652542757928428039747801194576
mflintc:  -3.3578006163379172772035196527315872423074652542757928428039747801194575461507026414323612
aflintc: [-3.3578006163379172772035196527315872423074652542757928428039747801194575461507026414323612 +/- 1.22e-89]
```

3.6.3 Tangent, $\tan(x)$

`ctx.tan`(x)

where `ctx` is `math53`, `mathc53`, `ctxcpp`, `ctxflint`.

Returns the tangent of x, $\tan(x)$. See also Wikipedia [1242], MathWorld [871], NIST [490], Ehrhardt [295] (4.2.61), Flint [742], Flint [732], Mpmath [578].

The tangent can be defined in terms of related functions as $\tan(x) = \dfrac{\sin(x)}{\cos(x)}$.

The tangent function is singular at $x = (n + 1/2)\pi$, but `tan(x)` always returns a finite result since $(n + 1/2)\pi$ cannot be represented exactly using floating-point arithmetic.

The complex tangent can be expressed in terms of related real functions:

$$\tan(z) = \tan(x + iy) = \frac{\sin(z)}{\cos(z)} = \frac{\sin(2x) + i\sinh(2y)}{\cos(2x) + i\cosh(2y)}$$

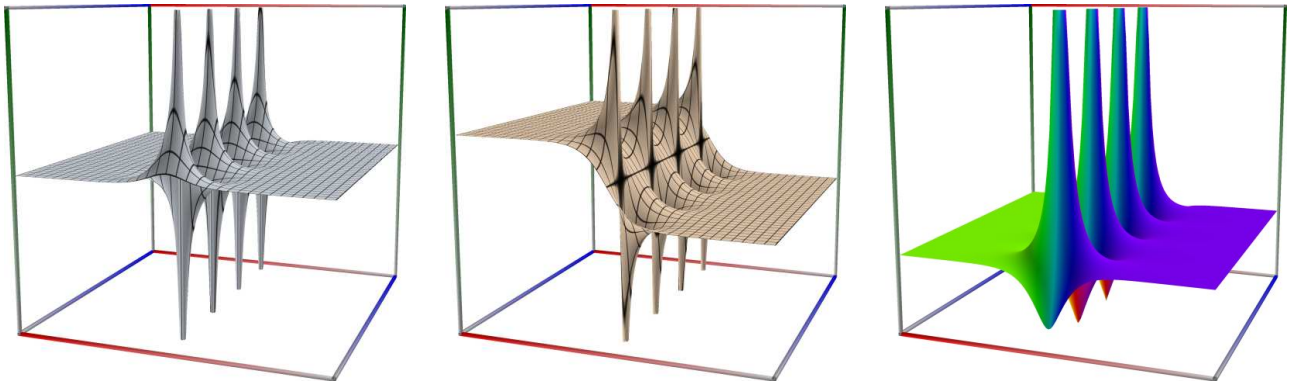

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.tan(x)))
    fpm:  2.4493894155846
    mpm:  2.44938941558459612055988620922824760358810196428080232272545402848798973614858271782375412
    dpm:  2.44938941558459612055988620922824760358810196428080232272545402848798973614858271782375412
    ipm: [2.44938941558459612055988620922824760358810196428080232272545402848798973614858271782375411 81005,
          2.44938941558459612055988620922824760358810196428080232272545402848798973614858271782375412 5955]
    gpm:  2.44938941558459612055988620922824760358810196428080232272545402848798973614858271782375411 81
    apm: [2.44938941558459612055988620922824760358810196428080232272545402848798973614858271782375411 +/- 3.25e-89]
 math53:  2.4493894155846
```

(continues on next page)

(continued from previous page)

```
  sreal:  2.44939
  dreal:  2.4493894155846
  ereal:  2.449389415584596121
  qreal:  2.44938941558459612055988620922825
  oreal:  2.44938941558459612055988620922824760358810196428080232272545402848798973614858271782375412
  mreal:  2.44938941558459612055988620922824760358810196428080232272545402848798973614858271782375412
 sflint:  2.44939
 dflint:  2.4493894155846
 eflint:  2.4493894155845961213
 qflint:  2.44938941558459612055988620922825
 oflint:  2.44938941558459612055988620922824760358810196428080232272545402848798973614858271782375412
 mflint:  2.44938941558459612055988620922824760358810196428080232272545402848798973614858271782375412
 aflint: [2.44938941558459612055988620922824760358810196428080232272545402848798973614858271782375412 +/- 3.27e-89]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.tan(x)))
    fpm:  (0.026317047123939355463586388171458092005197114886713, 1.026169469501243027231027850417561482244482645655471737690962545886078042618237569607007106867 6)
    mpm:  (0.026317047123939355463586388171458092005197114886713, 1.026169469501243027231027850417561482244482645655471737690962545886078042618237569607007106867 6)
cmath53:  (0.0263170471239394, 1.02616946950124)
  qcplx:  (0.026317047123939355463586388171458 1, 1.026169469501243027231027850417 6)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.tan(x))))
    fpm:  0.0263170471239393
    mpm:  0.026317047123939355463586388171458092005197114886712956258321040768620473920845614224252941110451,
          0.026317047123939355463586388171458092005197114886712956258321040768620473920845614224252943407753]
    dpm:  0.026317047123939355463586388171458092005197114886712956258321040768620473920845614224252943407753]
    ipm: [0.026317047123939355463586388171458092005197114886712956258321040768620473920845614224252941110451,
          0.026317047123939355463586388171458092005197114886712956258321040768620473920845614224252943407753]
    gpm:  0.026317047123939355463586388171458092005197114886712956258321040768620473920845614224252942322
    apm: [0.026317047123939355463586388171458092005197114886712956258321040768620473920845614224252942 +/- 3.30e-91]
cmath53:  0.0263170471239394
  scplx:  0.02631704
  dcplx:  0.0263170471239394
  ecplx:  0.02631704712393935546 2
  qcplx:  0.026317047123939355463586388171458 1
  ocplx:  0.026317047123939355463586388171458092005197114886712956258321040768620478
  mcplx:  0.026317047123939355463586388171458092005197114886712956258321040768620473920845614224252942322
sflintc:  0.02631704
dflintc:  0.0263170471239393
eflintc:  0.02631704712393935546 9
qflintc:  0.026317047123939355463586388171458 1
oflintc:  0.026317047123939355463586388171458092005197114886712956258321040768620473
mflintc:  0.026317047123939355463586388171458092005197114886712956258321040768620473920845614224252942322
aflintc: [0.026317047123939355463586388171458092005197114886712956258321040768620473920845614224252942 +/- 3.26e-91]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.tan(x))))
    fpm:  1.02616946950124
    mpm:  1.026169469501243027231027850417561482244482645655471737690962545886078042618237569607007106867 6
    dpm:  1.026169469501243027231027850417561482244482645655471737690962545886078042618237569607007106867 6
    ipm: [1.026169469501243027231027850417561482244482645655471737690962545886078042618237569607007102940 4,
          1.026169469501243027231027850417561482244482645655471737690962545886078042618237569607007106867 6]
    gpm:  1.026169469501243027231027850417561482244482645655471737690962545886078042618237569607007104 9
    apm: [1.026169469501243027231027850417561482244482645655471737690962545886078042618237569607007107 0 +/- 5.21e-90]
cmath53:  1.02616946950124
```

(continues on next page)

(continued from previous page)

```
  scplx:  1.026169
  dcplx:  1.02616946950124
  ecplx:  1.0261694695012430273
  qcplx:  1.026169469501243027231027850417561482244482645655471737690962545886078
  ocplx:  1.026169469501243027231027850417561482244482645655471737690962545886078
  mcplx:  1.026169469501243027231027850417561482244482645655471737690962545886078042618237569607007l1
sflintc:  1.026169
dflintc:  1.02616946950124
eflintc:  1.0261694695012430272
qflintc:  1.026169469501243027231027850417561
oflintc:  1.026169469501243027231027850417561482244482645655471737690962545886078
mflintc:  1.026169469501243027231027850417561482244482645655471737690962545886078042618237569607007l1
aflintc: [1.026169469501243027231027850417561482244482645655471737690962545886078042618237569607007l0 +/- 5.21e-90]
```

3.6.4 Cotangent, $\cot(x)$

`ctx.cot(`x`)`

where `ctx` is `math53`, `mathc53`, `ctxcpp`, `ctxflint`.

Returns the cotangent of x, $\cot(x)$. See also Wikipedia [1242], MathWorld [856], NIST [490], Ehrhardt [295] (4.2.21), Flint [742], Flint [732], Mpmath [558].

The cotangent can be expressed in terms of related functions as $\cot(x) = \dfrac{\cos(x)}{\sin(x)}$.

This cotangent function is singular at $x = n\pi$, but with the exception of the point $x = 0$, `cot(x)` returns a finite result since $n\pi$ cannot be represented exactly using floating-point arithmetic.

The complex cotangent can be expressed in terms of related real functions:

$$\cot(z) = \cot(x + iy) = \frac{\cos(z)}{\sin(z)} = \frac{\cos(2x) + i\cosh(2y)}{\sin(2x) + i\sinh(2y)}$$

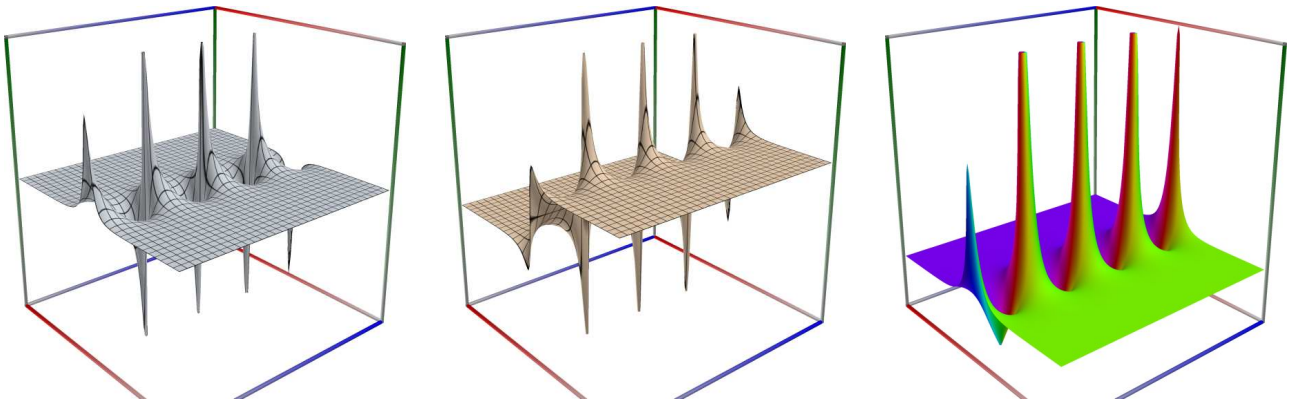

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.cot(x)))
    fpm:  0.408265012348528
    mpm:  0.40826501234852844239171999310032769324690177393059940344421347419219945197182404371588910l3
    dpm:  0.40826501234852844239171999310032769324690177393059940344421347419219945197182404371588910l3
    ipm: [0.40826501234852844239171999310032769324690177393059940344421347419219945197182404371588910198644,
```

(continues on next page)

(continued from previous page)

```
          0.40826501234852844239171999310032769324690177393059940344421347419219945197182404371588910327508]
    gpm:  0.4082650123485284423917199931003276932469017739305994034442134741921994519718240437158891032 1]
    apm: [0.40826501234852844239171999310032769324690177393059940344421347419219945197182404371588910 +/- 3.29e-90]
 math53:  0.408265012348528
  sreal:  0.4082649
  dreal:  0.408265012348528
  ereal:  0.4082650123485284423
  qreal:  0.40826501234852844239171999310032
  oreal:  0.408265012348528442391719993100327693246901773930599403444213474192199451971824043715889102
  mreal:  0.4082650123485284423917199931003276932469017739305994034442134741921994519718240437158891022
 sflint:  0.4082649
 dflint:  0.408265012348528
 eflint:  0.4082650123485284423
 qflint:  0.40826501234852844239171999310032
 oflint:  0.408265012348528442391719993100327693246901773930599403444213474192199451971824043715889102
 mflint:  0.4082650123485284423917199931003276932469017739305994034442134741921994519718240437158891022
 aflint: [0.40826501234852844239171999310032769324690177393059940344421347419219945197182404371588910 +/- 3.07e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.cot(x)))
    fpm:  (0.0249754563424156, -0.973857388511288)
    mpm:  (0.024975456342415621926156377087312194722467043567352, -0.
↪9738573885112884142083609112753926416274906783471448316186662301287419130140875051604209 47)
cmath53:  (0.0249754563424156, -0.973857388511288)
  qcplx:  (0.024975456342415621926156377087312, -0.97385738851128841420836091127539 3926416274906783471448316186662301287419130140875051604209 47)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.cot(x))))
    fpm:  0.0249754563424156
    mpm:  0.024975456342415621926156377087312194722467043567352128734767546208029188570998315391678107 1
    dpm:  0.024975456342415621926156377087312194722467043567352128734767546208029188570998315391678107 1
    ipm: [0.024975456342415621926156377087312194722467043567352128734767546208029188570998315391678105941981,
          0.024975456342415621926156377087312194722467043567352128734767546208029188570998315391678108116556]
    gpm:  0.024975456342415621926156377087312194722467043567352128734767546208029188570998315391678107093
    apm: [0.024975456342415621926156377087312194722467043567352128734767546208029188570998315391678107 0 +/- 9.83e-92]
cmath53:  0.0249754563424156
  scplx:  0.02497545
  dcplx:  0.0249754563424156
  ecplx:  0.02497545634241562192
  qcplx:  0.024975456342415621926156377087312
  ocplx:  0.024975456342415621926156377087312194722467043567352128734767546208029192
  mcplx:  0.024975456342415621926156377087312194722467043567352128734767546208029188570998315391678107
sflintc:  0.02497545
dflintc:  0.0249754563424156
eflintc:  0.02497545634241562192 2
qflintc:  0.024975456342415621926156377087312
oflintc:  0.024975456342415621926156377087312194722467043567352128734767546208029188
mflintc:  0.024975456342415621926156377087312194722467043567352128734767546208029188570998315391678107
aflintc: [0.024975456342415621926156377087312194722467043567352128734767546208029188570998315391678107 0 +/- 9.33e-92]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.cot(x))))
    fpm:  -0.973857388511288
    mpm:  -0.973857388511288414208360911275392641627490678347144831618666230128741913014087505160420947
    dpm:  -0.973857388511288414208360911275392641627490678347144831618666230128741913014087505160420947
```

(continues on next page)

(continued from previous page)

```
    ipm: [-0.97385738851128841420836091127539264162749067834714483161866623012874191301408750516042094905402,
          -0.97385738851128841420836091127539264162749067834714483161866623012874191301408750516042094561765]
    gpm:  -0.9738573885112884142083609112753926416274906783471448316186662301287419130140875051604209473 4
    apm: [-0.97385738851128841420836091127539264162749067834714483161866623012874191301408750516042094947 +/- 3.91e-91]
cmath53:  -0.973857388511288
  scplx:  -0.9738575
  dcplx:  -0.973857388511288
  ecplx:  -0.97385738851128841409
  qcplx:  -0.973857388511288414208360911275393
  ocplx:  -0.9738573885112884142083609112753926416274906783471448316186662301287419 1
  mcplx:  -0.97385738851128841420836091127539264162749067834714483161866623012874191301408750516042094947
sflintc:  -0.9738574
dflintc:  -0.973857388511288
eflintc:  -0.9738573885112884142
qflintc:  -0.973857388511288414208360911275393
oflintc:  -0.9738573885112884142083609112753926416274906783471448316186662301287419 1
mflintc:  -0.97385738851128841420836091127539264162749067834714483161866623012874191301408750516042094947
aflintc: [-0.97385738851128841420836091127539264162749067834714483161866623012874191301408750516042094947 +/- 6.96e-91]
```

3.6.5 Cosecant, $\csc(x)$

`ctx.csc`(x)

where `ctx` is `math53`, `mathc53`, `ctxcpp` or `ctxflint`.

Returns the cosecant of x, $\csc(x)$. See also Wikipedia [1242], MathWorld [854], NIST [490], Ehrhardt [295] (4.2.23), Flint [742], Flint [732], Mpmath [557].

The cosecant can be expressed in terms of related functions as $\csc(x) = \dfrac{1}{\sin(x)}$.

The cosecant function is singular at $x = n\pi$, but with the exception of the point $x = 0$, `csc(x)` returns a finite result since $n\pi$ cannot be represented exactly using floating-point arithmetic.

The complex cosecant can be expressed in terms of related real functions:

$$\csc(z) = \csc(x + iy) = \frac{1}{\sin(z)} = \frac{2i}{e^{ix} - e^{-ix}} = \frac{1}{\sin(x)\cosh(y) + i\cos(x)\sinh(y)}.$$

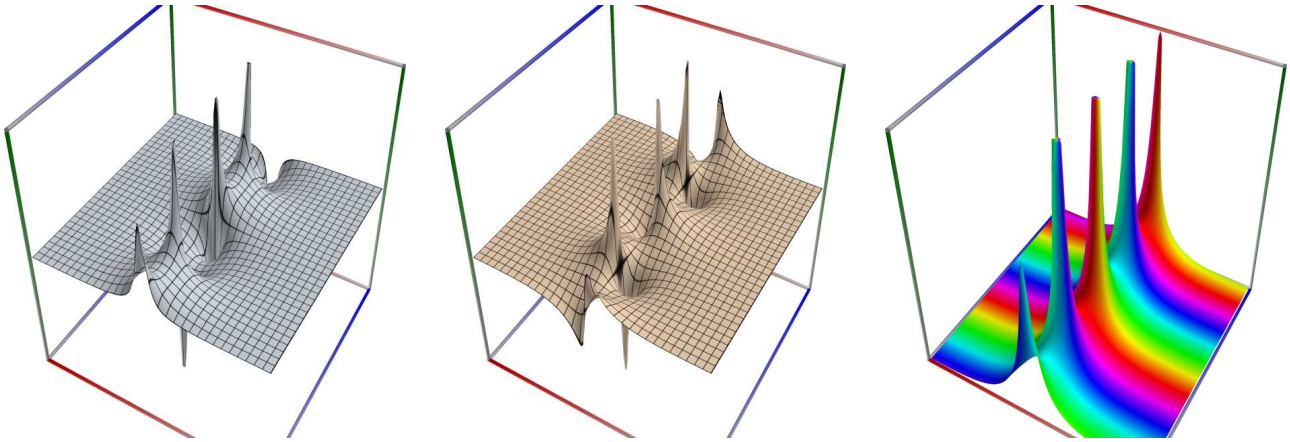

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.csc(x)))
    fpm:  1.08012977012392
    mpm:  1.0801297701239162131124811931863293758303796772278481705535113076569525318158902167663828928910284,
          1.0801297701239162131124811931863293758303796772278481705535113076569525318158902167663828910648]
    dpm:  1.0801297701239162131124811931863293758303796772278481705535113076569525318158902167663828928910284,
          1.0801297701239162131124811931863293758303796772278481705535113076569525318158902167663828910648]
    ipm: [1.0801297701239162131124811931863293758303796772278481705535113076569525318158902167663828903284,
          1.0801297701239162131124811931863293758303796772278481705535113076569525318158902167663828910648]
    gpm:  1.0801297701239162131124811931863293758303796772278481705535113076569525318158902167663828908
    apm: [1.0801297701239162131124811931863293758303796772278481705535113076569525318158902167663828908 +/- 1.03e-90]
 math53:  1.08012977012392
  sreal:  1.08013
  dreal:  1.08012977012392
  ereal:  1.080129770123916213
  qreal:  1.0801297701239162131124811931863 3
  oreal:  1.0801297701239162131124811931863293758303796772278481705535113076569525
  mreal:  1.0801297701239162131124811931863293758303796772278481705535113076569525318158902167663828908
 sflint:  1.08013
 dflint:  1.08012977012392
 eflint:  1.080129770123916213
 qflint:  1.0801297701239162131124811931863 3
 oflint:  1.0801297701239162131124811931863293758303796772278481705535113076569525
 mflint:  1.0801297701239162131124811931863293758303796772278481705535113076569525318158902167663828908
 aflint: [1.0801297701239162131124811931863293758303796772278481705535113076569525318158902167663828908 +/- 1.70e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.csc(x)))
    fpm:  (0.248592823375937, -0.0978408481797583)
    mpm:  (0.24859282337593718934061244952557169864695610247605, -0.
↪097840848179758428421910032913974631441522709941308)
cmath53:  (0.248592823375937, -0.0978408481797584)
  qcplx:  (0.24859282337593718934061244952557 , -0.097840848179758428421910032913974 )
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.csc(x))))
    fpm:  0.248592823375937
    mpm:  0.24859282337593718934061244952557169864695610247604751151939637378865889742974989602224668175196,
          0.24859282337593718934061244952557169864695610247604751151939637378865889742974989602224668221219]
    dpm:  0.24859282337593718934061244952557169864695610247604751151939637378865889742974989602224668221219]
    ipm: [0.24859282337593718934061244952557169864695610247604751151939637378865889742974989602224668175196,
          0.24859282337593718934061244952557169864695610247604751151939637378865889742974989602224668221219]
    gpm:  0.24859282337593718934061244952557169864695610247604751151939637378865889742974989602224668194
    apm: [0.24859282337593718934061244952557169864695610247604751151939637378865889742974989602224668194 +/- 2.24e-91]
cmath53:  0.248592823375937
  scplx:  0.2485928
  dcplx:  0.248592823375937
  ecplx:  0.24859282337593718934
  qcplx:  0.24859282337593718934061244952557 
  ocplx:  0.24859282337593718934061244952557169864695610247604751151939637378865889
  mcplx:  0.24859282337593718934061244952557169864695610247604751151939637378865889742974989602224668221219]
sflintc:  0.2485928
dflintc:  0.248592823375937
eflintc:  0.24859282337593718935
qflintc:  0.24859282337593718934061244952557 
oflintc:  0.24859282337593718934061244952557169864695610247604751151939637378865889
mflintc:  0.24859282337593718934061244952557169864695610247604751151939637378865889742974989602224668221219]
aflintc: [0.24859282337593718934061244952557169864695610247604751151939637378865889742974989602224668221219] +/- 6.73e-91]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.csc(x))))
    fpm:  -0.0978408481797583
    mpm:  -0.0978408481797584284219100329139746314415227099413086822460924157168089818084995972545304144
    dpm:  -0.0978408481797584284219100329139746314415227099413086822460924157168089818084995972545304143
    ipm: [-0.0978408481797584284219100329139746314415227099413086822460924157168089818084995972545304144423317,
          -0.0978408481797584284219100329139746314415227099413086822460924157168089818084995972545304140039794]
    gpm:  -0.0978408481797584284219100329139746314415227099413086822460924157168089818084995972545304144362
    apm: [-0.0978408481797584284219100329139746314415227099413086822460924157168089818084995972545304144 +/- 4.24e-91]
cmath53:  -0.0978408481797584
  scplx:  -0.09784083
  dcplx:  -0.0978408481797583
  ecplx:  -0.09784084819797584283 95
  qcplx:  -0.0978408481797584284219100329139746
  ocplx:  -0.097840848179758428421910032913974631441522709941308682246092415716808978
  mcplx:  -0.0978408481797584284219100329139746314415227099413086822460924157168089818084995972545304144
sflintc:  -0.09784082
dflintc:  -0.0978408481797583
eflintc:  -0.09784084819797584284 02
qflintc:  -0.0978408481797584284219100329139746
oflintc:  -0.097840848179758428421910032913974631441522709941308682246092415716808979
mflintc:  -0.0978408481797584284219100329139746314415227099413086822460924157168089818084995972545304144
aflintc: [-0.0978408481797584284219100329139746314415227099413086822460924157168089818084995972545304144 +/- 4.20e-91]
```

3.6.6 Secant, $\sec(x)$

`ctx.sec`(x)

where `ctx` is `math53`, `mathc53`, `ctxcpp` or `ctxflint`.

Returns the secant of x, $\sec(x)$. See also Wikipedia [1242], MathWorld [869], NIST [490], Ehrhardt [295] (4.2.53), Flint [742], Flint [732], Mpmath [577].

The secant can be expressed in terms of related functions as $\sec(x) = \dfrac{1}{\cos(x)}$.

The secant function is singular at $x = (n + 1/2)\pi$, but `sec(x)` always returns a finite result since $(n + 1/2)\pi$ cannot be represented exactly using floating-point arithmetic.

The complex secant can be expressed in terms of related real functions:

$$\sec(z) = \sec(x + iy) = \frac{1}{\cos(z)} = \frac{2}{e^{ix} + e^{-ix}} = \frac{1}{\cos(x)\cosh(y) - i\sin(x)\sinh(y)}.$$

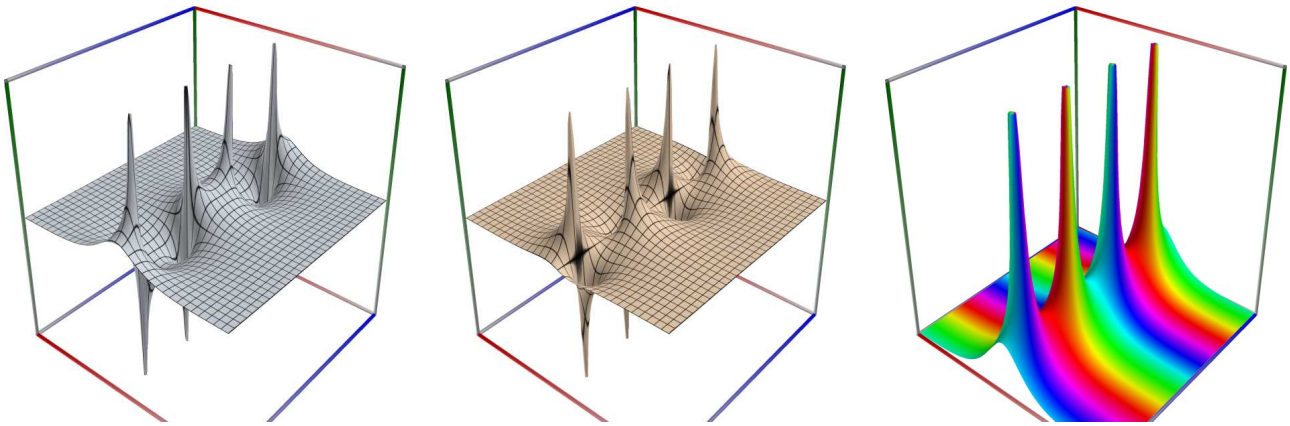

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.sec(x)))
    fpm:  2.64565842639935
    mpm:  2.64565842639934328406027873883707286536032192092616777280010393745551939033638123640770908
    dpm:  2.64565842639934328406027873883707286536032192092616777280010393745551939033638123640770908
    ipm: [2.64565842639934328406027873883707286536032192092616777280010393745551939033638123640770908 +/- 9.61e-90]
 math53:  2.64565842639935
  sreal:  2.645659
  dreal:  2.64565842639935
  ereal:  2.6456584263993432845
  qreal:  2.64565842639934328406027873883707
  oreal:  2.64565842639934328406027873883707286536032192092616777280010393745551939033638123640770908
  mreal:  2.64565842639934328406027873883707286536032192092616777280010393745551939033638123640770908
 sflint:  2.645659
 dflint:  2.64565842639935
 eflint:  2.6456584263993432847
 qflint:  2.64565842639934328406027873883707
 oflint:  2.64565842639934328406027873883707286536032192092616777280010393745551939033638123640770908
 mflint:  2.64565842639934328406027873883707286536032192092616777280010393745551939033638123640770908
 aflint: [2.64565842639934328406027873883707286536032192092616777280010393745551939033638123640770908 +/- 9.61e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.sec(x)))
    fpm:  (0.106943520319632, 0.252523483473309)
    mpm:  (0.10694352031963203795347106579460138037081940199945, 0.252523483473308773629036307561501224175076680523 9)
cmath53:  (0.106943520319632, 0.252523483473309)
  qcplx:  (0.10694352031963203795347106579460 1, 0.252523483473308773629036307561501)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.sec(x))))
    fpm:  0.106943520319632
    mpm:  0.10694352031963203795347106579460138037081940199945352838874259520834337626953416098614081793078,
    dpm:  0.10694352031963203795347106579460138037081940199945352838874259520834337626953416098614081836032]
    ipm: [0.10694352031963203795347106579460138037081940199945352838874259520834337626953416098614081793078,
    gpm:  0.1069435203196320379534710657946013803708194019994535283887425952083433762695341609861408182 7
    apm: [0.10694352031963203795347106579460138037081940199945352838874259520834337626953416098614081836032 +/- 3.47e-91]
cmath53:  0.106943520319632
  scplx:  0.1069435
  dcplx:  0.106943520319632
  ecplx:  0.10694352031963203793
  qcplx:  0.1069435203196320379534710657946 1
  ocplx:  0.10694352031963203795347106579460138037081940199945352838874259520834337
  mcplx:  0.10694352031963203795347106579460138037081940199945352838874259520834337626953416098614081836032
sflintc:  0.1069435
dflintc:  0.106943520319632
eflintc:  0.10694352031963203793
qflintc:  0.1069435203196320379534710657946 1
oflintc:  0.10694352031963203795347106579460138037081940199945352838874259520834337
mflintc:  0.10694352031963203795347106579460138037081940199945352838874259520834337626953416098614081836032
aflintc: [0.10694352031963203795347106579460138037081940199945352838874259520834337626953416098614081836032 +/- 5.69e-91]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.sec(x))))
    fpm:  0.252523483473309
    mpm:  0.252523483473308773629036307561501224175076680523895594496120449682053284606115960266205718
    dpm:  0.252523483473308773629036307561501224175076680523895594496120449682053284606115960266205718
    ipm: [0.252523483473308773629036307561501224175076680523895594496120449682053284606115960266205717232,
          0.252523483473308773629036307561501224175076680523895594496120449682053284606115960266205717781323]
    gpm:  0.252523483473308773629036307561501224175076680523895594496120449682053284606115960266205717751
    apm: [0.252523483473308773629036307561501224175076680523895594496120449682053284606115960266205718 +/- 7.48e-91]
cmath53:  0.252523483473309
  scplx:  0.2525235
  dcplx:  0.252523483473309
  ecplx:  0.25252348347330877363
  qcplx:  0.252523483473308773629036307561501
  ocplx:  0.252523483473308773629036307561501224175076680523895594496120449682053284
  mcplx:  0.252523483473308773629036307561501224175076680523895594496120449682053284606115960266205717
sflintc:  0.2525235
dflintc:  0.252523483473309
eflintc:  0.25252348347330877363
qflintc:  0.252523483473308773629036307561501
oflintc:  0.252523483473308773629036307561501224175076680523895594496120449682053
mflintc:  0.252523483473308773629036307561501224175076680523895594496120449682053284606115960266205717
aflintc: [0.252523483473308773629036307561501224175076680523895594496120449682053284606115960266205572 +/- 3.56e-90]
```

3.6.7 Cardinal sine, $\mathrm{sinc}(x)$

`ctx.sinc`(x)

where `ctx` is `math53`, `mathc53`, `ctxcpp`, `ctxflint`.

Returns the cardinal sine of x. See also Wikipedia [1286], MathWorld [929], BoostMath [127], Flint [742], Flint [732], Mpmath [601].

`sinc(x)` computes the unnormalized sinc function, defined as $\mathrm{sinc}(x) = \begin{cases} \sin(x)/x, & \text{if } x \neq 0 \\ 1, & \text{if } x = 0. \end{cases}$

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.sinc(x)))
    fpm:  -0.181532290652497
    mpm:  -0.181532290652496528812969852459777120099882944383451754666089127829859185732660174399393407
    dpm:  -0.181532290652496528812969852459777120099882944383451754666089127829859185732660174399393407
    ipm: [-0.181532290652496528812969852459777120099882944383451754666089127829859185732660174399393340702333,
          -0.181532290652496528812969852459777120099882944383451754666089127829859185732660174399393406839 24]
    gpm:  -0.181532290652496528812969852459777120099882944383451754666089127829859185732660174399393406 87
    apm: [-0.181532290652496528812969852459777120099882944383451754666089127829859185732660174399393407 +/- 1.85e-91]
 math53:  -0.181532290652497
  sreal:  -0.1815323
  dreal:  -0.181532290652497
  ereal:  -0.18153229065249652883
  qreal:  -0.181532290652496528812969852459777
  oreal:  -0.181532290652496528812969852459777120099882944383451754666089127829859185
  mreal:  -0.181532290652496528812969852459777120099882944383451754666089127829859185732660174399393407
 sflint:  -0.1815323
 dflint:  -0.181532290652497
 eflint:  -0.18153229065249652883
 qflint:  -0.181532290652496528812969852459777
 oflint:  -0.181532290652496528812969852459777120099882944383451754666089127829859185
 mflint:  -0.181532290652496528812969852459777120099882944383451754666089127829859185732660174399393407
 aflint: [-0.181532290652496528812969852459777120099882944383451754666089127829859185732660174399393407 +/- 3.65e-91]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.sinc(x)))
    fpm:  (-0.500567964800071, -0.465099694057497)
    mpm:  (-0.50056796480007066917487902838047301752348919625091616276776454424511521810954108060031739925861, -0.46509969405749755887381804365459474244520662812665911546002635274885177722128658582434454041842)
cmath53:  (-0.500567964800071, -0.465099694057497)
  qcplx:  (-0.50056796480007066917487902838047, -0.46509969405749755887381804365459)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.sinc(x))))
    fpm:  -0.500567964800071
    mpm:  -0.500567964800070669174879028380473017523489196250916162767764544245115218109541080600317399
    dpm:  -0.500567964800070669174879028380473017523489196250916162767764544245115218109541080600317399
    ipm: [-0.500567964800070669174879028380473017523489196250916162767764544245115218109541080600317399
          -0.500567964800070669174879028380473017523489196250916162767764544245115218109541080600317399]
    gpm:  -0.500567964800070669174879028380473017523489196250916162767764544245115218109541080600317399
    apm: [-0.500567964800070669174879028380473017523489196250916162767764544245115218109541080600317400 +/- 2.04e-90]
cmath53:  -0.500567964800071
  scplx:  -0.500568
  dcplx:  -0.500567964800071
  ecplx:  -0.50056796480007066929
  qcplx:  -0.500567964800070669174879028380473
  ocplx:  -0.500567964800070669174879028380473017523489196250916162767764544245115523
  mcplx:  -0.500567964800070669174879028380473017523489196250916162767764544245115218109541080600317399
sflintc:  -0.500568
dflintc:  -0.500567964800071
eflintc:  -0.50056796480007066923
qflintc:  -0.500567964800070669174879028380473
oflintc:  -0.500567964800070669174879028380473017523489196250916162767764544245115523
mflintc:  -0.500567964800070669174879028380473017523489196250916162767764544245115218109541080600317399
aflintc: [-0.500567964800070669174879028380473017523489196250916162767764544245115218109541080600317400 +/- 3.52e-90]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.sinc(x))))
    fpm:  -0.465099694057497
    mpm:  -0.465099694057497558873818043654594742445206628126659115460026352748851777221286585824344540418421
    dpm:  -0.465099694057497558873818043654594742445206628126659115460026352748851777221286585824344540418421
    ipm: [-0.465099694057497558873818043654594742445206628126659115460026352748851777221286585824344540418421
          -0.465099694057497558873818043654594742445206628126659115460026352748851777221286585824344539366]
    gpm:  -0.465099694057497558873818043654594742445206628126659115460026352748851777221286585824344540418421
    apm: [-0.465099694057497558873818043654594742445206628126659115460026352748851777221286585824344540418421 +/- 1.41e-90]
cmath53:  -0.465099694057497
  scplx:  -0.4650997
  dcplx:  -0.465099694057497
  ecplx:  -0.46509969405749755888
  qcplx:  -0.465099694057497558873818043654595
  ocplx:  -0.465099694057497558873818043654594742445206628126659115460026352748851777221286585824344539
  mcplx:  -0.465099694057497558873818043654594742445206628126659115460026352748851777221286585824344539
sflintc:  -0.4650997
dflintc:  -0.465099694057497
eflintc:  -0.46509969405749755885
qflintc:  -0.465099694057497558873818043654595
oflintc:  -0.465099694057497558873818043654594742445206628126659115460026352748851777221286585824344539
mflintc:  -0.465099694057497558873818043654594742445206628126659115460026352748851777221286585824344539
aflintc: [-0.465099694057497558873818043654594742445206628126659115460026352748851777221286585824344540418421 +/- 2.53e-90]
```

3.7 Trigonometric functions, in multiples of π

3.7.1 Auxiliary function $\mathrm{sinpi}(x) = \sin(\pi x)$

`ctx.sinpi(`x`)`

where `ctx` is `math53`, `mathc53`, `ctxcpp`, `ctxflint`.

Returns the sine of $x \cdot \pi$. See also BoostMath [111], Ehrhardt [295] (4.2.57), Flint [742], Flint [732], Mpmath [554].

The function can also be expressed as

$$\sin(\pi z) = \frac{\pi}{\Gamma(z)\Gamma(1-z)}$$

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.sinpi(x)))
    fpm:  0.309016994374946
    mpm:  0.309016994374947424102293417182819058860154589902881431067724311352630231409451224853603603
    dpm:  0.309016994374947424102293417182819058860154589902881431067724311352630231409451224853603593
    ipm: [0.309016994374947424102293417182819058860154589902881431067724311352630231409451224853603598359874298,
          0.309016994374947424102293417182819058860154589902881431067724311352630231409451224853603600629071]
    gpm:  0.309016994374947424102293417182819058860154589902881431067724311352630231409451224853603600249
    apm: [0.309016994374947424102293417182819058860154589902881431067724311352630231409451224853603600 +/- 3.44e-90]
 math53:  0.309016994374946
  sreal:  0.3090167
  dreal:  0.309016994374946
  ereal:  0.30901699437494742386
  qreal:  0.309016994374947424102293417182818
  oreal:  0.309016994374947424102293417182819058860154589902881431067724311352630231409451224853603600
  mreal:  0.309016994374947424102293417182819058860154589902881431067724311352630231409451224853603600
 sflint:  0.3090167
 dflint:  0.309016994374946
 eflint:  0.30901699437494742383
 qflint:  0.309016994374947424102293417182818
 oflint:  0.309016994374947424102293417182819058860154589902881431067724311352630231409451224853603600
 mflint:  0.309016994374947424102293417182819058860154589902881431067724311352630231409451224853603600
 aflint: [0.309016994374947424102293417182819058860154589902881431067724311352630231409451224853603600 +/- 3.60e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.sinpi(x)))
    fpm:  (82.7382994873335, -254.640526182464)
    mpm:  (82.738299487333814021344343223270717172521950280462, -254.64052618246418903998202557497440577091288486 79)
cmath53:  (82.7382994873335, -254.640526182464)
  qcplx:  (82.738299487333814021344343223270 5, -254.64052618246418903998202557497 )
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> ffor ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.sinpi(x))))
    fpm:  82.7382994873335
    mpm:  82.738299487333814021344343223270717172521950280465410055457149087037569934102893793360360 1
    dpm:  82.738299487333814021344343223270717172521950280465410055457149087037569934102893793360358 4
    ipm: [82.738299487333814021344343223270717172521950280465410055457149087037569934102893793360359045877,
          82.738299487333814021344343223270717172521950280465410055457149087037569934102893793360361135188]
    gpm:  82.738299487333814021344343223270717172521950280465410055457149087037569934102893793360360051
    apm: [82.738299487333814021344343223270717172521950280465410055457149087037569934102893793360360 +/- 1.63e-87]
cmath53:  82.7382994873335
```

(continues on next page)

(continued from previous page)

```
  scplx:  82.73824
  dcplx:  82.7382994873329
  ecplx:  82.73829948733381396
  qcplx:  82.738299487333814021344343223270717172521950280465410055457149087037561
  ocplx:  82.7382994873338140213443432232707171725219502804654100554571490870375699341028937933603 59
  mcplx:  82.738299487333814021344343223270717172521950280465410055457149087037569934102893793360359
sflintc:  82.73822
dflintc:  82.7382994873335
eflintc:  82.738299487333813953
qflintc:  82.738299487333814021344343223270717172521950280465410055457149087037559
oflintc:  82.7382994873338140213443432232707171725219502804654100554571490870375699341028937933603 59
mflintc:  82.738299487333814021344343223270717172521950280465410055457149087037569934102893793360359
aflintc: [82.738299487333814021344343223270717172521950280465410055457149087037569934102893793360036 +/- 2.09e-87]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.sinpi(x))))
    fpm:  -254.640526182464
    mpm:  -254.64052618246418903998202557497440577091288486789473994563183317558594897969086082102344117873,
          -254.64052618246418903998202557497440577091288486789473994563183317558594897969086082102344023618]
    gpm:  -254.64052618246418903998202557497440577091288486789473994563183317558594897969086082102344058
    apm: [-254.64052618246418903998202557497440577091288486789473994563183317558594897969086082102344117873 +/- 7.17e-88]
cmath53:  -254.640526182464
  scplx:  -254.6406
  dcplx:  -254.640526182463
  ecplx:  -254.6405261824641891
  qcplx:  -254.64052618246418903998202557497 4
  ocplx:  -254.64052618246418903998202557497440577091288486789473994563183317558596
  mcplx:  -254.64052618246418903998202557497440577091288486789473994563183317558594897969086082102344
sflintc:  -254.6405
dflintc:  -254.640526182464
eflintc:  -254.64052618246418906
qflintc:  -254.64052618246418903998202557497 4
oflintc:  -254.64052618246418903998202557497440577091288486789473994563183317558595
mflintc:  -254.64052618246418903998202557497440577091288486789473994563183317558594897969086082102344
aflintc: [-254.64052618246418903998202557497440577091288486789473994563183317558594897969086082102344 +/- 1.49e-87]
```

3.7.2 Auxiliary function $\operatorname{cospi}(x) = \cos(\pi x)$

`ctx.cospi(`x`)`

where `ctx` is `math53`, `mathc53`, `ctxcpp`, `ctxflint`.

Returns $\cos(\pi x)$. See also BoostMath [98], Flint [742], Flint [732], Mpmath [538].

The function is calculated as

$$\cos(\pi z) = \frac{\pi}{\Gamma\left(\frac{1}{2}+z\right)\Gamma\left(\frac{1}{2}-z\right)}$$

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.cospi(x)))
    fpm:  -0.951056516295154
    mpm:  -0.951056516295153572116439333379382143405698634125750222447305644430153170085193501718792811
    dpm:  -0.951056516295153572116439333379382143405698634125750222447305644430153170085193501718792814
    ipm: [-0.951056516295153572116439333379382143405698634125750222447305644430153170085193501718792814,
          -0.951056516295153572116439333379382143405698634125750222447305644430153170085193501718792811]
```

(continues on next page)

(continued from previous page)

```
    gpm:  -0.95105651629515357211643933337938214340569863412575022244730564443015317008519350171879281088
    apm: [-0.95105651629515357211643933337938214340569863412575022244730564443015317008519350171879281 +/- 2.86e-90]
 math53:  -0.951056516295154
  sreal:  -0.9510566
  dreal:  -0.951056516295154
  ereal:  -0.95105651629515357222
  qreal:  -0.951056516295153572116439333379382
  oreal:  -0.9510565162951535721164393333793821434056986341257502224473056444301531700851935017187928 12
  mreal:  -0.95105651629515357211643933337938214340569863412575022244730564443015317008519350171879281 2
 sflint:  -0.9510566
 dflint:  -0.951056516295154
 eflint:  -0.95105651629515357222
 qflint:  -0.951056516295153572116439333379382
 oflint:  -0.95105651629515357211643933337938214340569863412575022244730564443015318
 mflint:  -0.95105651629515357211643933337938214340569863412575022244730564443015317008519350171879281 2
 aflint: [-0.95105651629515357211643933337938214340569863412575022244730564443015317008519350171879281 +/- 2.75e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.cospi(x)))
    fpm:  (-254.642302226043, -82.7377224157934)
    mpm:  (-254.64230222604298794494623103815965987458848095594, -82.737722415793694277313209914422205954767431316885)
cmath53:  (-254.642302226041, -82.7377224157928)
  qcplx:  (-254.64230222604298794494623103816, -82.737722415793694277313209914421 9)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.cospi(x))))
    fpm:  -254.642302226043
    mpm:  -254.64230222604298794494623103815965987458848095593949258467057529550083730354423039322129 3
    dpm:  -254.64230222604298794494623103815965987458848095593949258467057529550083730354423039322129 6
    ipm: [-254.64230222604298794494623103815965987458848095593949258467057529550083730354423039322129 0836,
          -254.64230222604298794494623103815965987458848095593949258467057529550083730354423039322129 6582]
    gpm:  -254.64230222604298794494623103815965987458848095593949258467057529550083730354423039322129 331
    apm: [-254.64230222604298794494623103815965987458848095593949258467057529550083730354423039322129 +/- 4.02e-87]
cmath53:  -254.642302226041
  scplx:  -254.6424
  dcplx:  -254.642302226041
  ecplx:  -254.64230222604298799
  qcplx:  -254.642302226042987944946231038
  ocplx:  -254.64230222604298794494623103815965987458848095593949258467057529550085
  mcplx:  -254.64230222604298794494623103815965987458848095593949258467057529550083730354423039322129 3
sflintc:  -254.6423
dflintc:  -254.642302226043
eflintc:  -254.64230222604298796
qflintc:  -254.642302226042987944946231038
oflintc:  -254.64230222604298794494623103815965987458848095593949258467057529550084
mflintc:  -254.64230222604298794494623103815965987458848095593949258467057529550083730354423039322129 3
aflintc: [-254.64230222604298794494623103815965987458848095593949258467057529550083730354423039322129 +/- 4.25e-87]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.cospi(x))))
    fpm:  -82.7377224157934
    mpm:  -82.737722415793694277313209914422205954767431316888584257767342358998041479631920225113791
    dpm:  -82.737722415793694277313209914422205954767431316888584257767342358998041479631920225113789 2
    ipm: [-82.737722415793694277313209914422205954767431316888584257767342358998041479631920225113792017903,
          -82.737722415793694277313209914422205954767431316888584257767342358998041479631920225113789912884]
```

(continues on next page)

(continued from previous page)

```
    gpm:  -82.737722415793694277313209914422205954767431316888584257767342358998041479631920225113790918
    apm: [-82.737722415793694277313209914422205954767431316888584257767342358998041479631920225113790918 +/- 1.06e-87]
cmath53:  -82.7377224157928
  scplx:  -82.73766
  dcplx:  -82.7377224157928
  ecplx:  -82.737722415793694228
  qcplx:  -82.737722415793694277313209914422
  ocplx:  -82.737722415793694277313209914422205954767431316888584257767342358998033
  mcplx:  -82.737722415793694277313209914422205954767431316888584257767342358998041479631920225113789
sflintc:  -82.73765
dflintc:  -82.7377224157934
eflintc:  -82.737722415793694207
qflintc:  -82.737722415793694277313209914422
oflintc:  -82.737722415793694277313209914422205954767431316888584257767342358998031
mflintc:  -82.737722415793694277313209914422205954767431316888584257767342358998041479631920225113789
aflintc: [-82.737722415793694277313209914422205954767431316888584257767342358998041479631920225113790918 +/- 1.22e-87]
```

3.7.3 Auxiliary function $\mathrm{tanpi}(x) = \tan(\pi x)$

`ctx.tanpi(`x`)`

where `ctx` is `math53`, `mathc53`, `ctxcpp` or `ctxflint`.

Returns $\tan(\pi x)$. See also BoostMath [98], Flint [742], Flint [732].

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.tanpi(x)))
    fpm:  -0.324919696232905
    mpm:  -0.324919696232906326155871412215134464954903471521475100307804719136672900960744948322687736
    dpm:  -0.324919696232906326155871412215134464954903471521475100307804719136672900960744948322687725
    ipm: [-0.324919696232906326155871412215134464954903471521475100307804719136672900960744948322687740369 34,
          -0.324919696232906326155871412215134464954903471521475100307804719136672900960744948322687731532 97]
    gpm:  -0.324919696232906326155871412215134464954903471521475100307804719136672900960744948322687735 89
    apm: [-0.324919696232906326155871412215134464954903471521475100307804719136672900960744948322687737 +/- 6.22e-90]
 math53:  -0.324919696232905
  sreal:  -0.3249194
  dreal:  -0.324919696232905
  ereal:  -0.32491969623290632588
  qreal:  -0.324919696232906326155871412215133
  oreal:  -0.3249196962329063261558714122151344649549034715214751003078047191366729009607449483226872857
  mreal:  -0.324919696232906326155871412215134464954903471521475100307804719136672900960744948322687733
 sflint:  -0.3249194
 dflint:  -0.324919696232905
 eflint:  -0.32491969623290632585
 qflint:  -0.324919696232906326155871412215133
 oflint:  -0.3249196962329063261558714122151344649549034715214751003078047191366729009607449483226872857
 mflint:  -0.324919696232906326155871412215134464954903471521475100307804719136672900960744948322687733
 aflint: [-0.324919696232906326155871412215134464954903471521475100307804719136672900960744948322687737 +/- 5.64e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.tanpi(x)))
    fpm:  (-4.09959368077421E-06, 0.999994357369054)
    mpm:  (-0.000004099593680774221984382727893632040147654, 0.99999435736905352831643691630084368188 86)
cmath53:  (-4.09959368071456E-06, 0.999994357369054)
  qcplx:  (-4.09959368077422198438272789371976e-06, 0.99999435736905352831643691630084368188 44)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.tanpi(x))))
    fpm:  -4.09959368077421E-06
    mpm:  -0.000004099593680774221984382727893632040150972248539811512446701286888793569490389956991764969 4
    dpm:  -0.000004099593680774221984382727893632040150972248539811512446701286888793569490389956991764925 39
    ipm: [-0.000004099593680774221984382727893632040150972248539811512446701286888793569490389956991773442356 2145,
          -0.000004099593680774221984382727893632040150972248539811512446701286888793569490389956991756368114 9449]
    gpm:  -4.099593680774221984382727893632040150972248539811512446701286888793569490389956991764933137 9e-06
    apm: [-4.099593680774221984382727893632040150972248539811512446701286888793569490389956991764925 5e-6 +/- 7.45e-95]
cmath53:  -4.09959368071456E-06
  scplx:  -4.120062E-06
  dcplx:  -4.09959368071456E-06
  ecplx:  -4.0995936807741566245e-06
  qcplx:  -4.0995936807742219843827278937 1976e-06
  ocplx:  -4.0995936807742219843827278936320401509722485398115124467012868887 3192e-06
  mcplx:  -4.0995936807742219843827278936320401509722485398115124467012868887935694903899569917649255 4E-06
sflintc:  -4.09959E-06
dflintc:  -4.09959368077421E-06
eflintc:  -4.0995936807742219813e-06
qflintc:  -4.0995936807742219843827278936320 3e-06
oflintc:  -4.0995936807742219843827278936320401509722485398115124467012868887935694903899569917649255 4e-06
mflintc:  -4.0995936807742219843827278936320401509722485398115124467012868887935694903899569917649255 4E-06
aflintc: [-4.0995936807742219843827278936320401509722485398115124467012868887935694903899569917649255 4e-6 +/- 7.13e-95]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.tanpi(x))))
    fpm:  0.999994357369054
    mpm:  0.999994357369053528316436916300843681888607167133593607824882640735311858864332882735026936
    dpm:  0.999994357369053528316436916300843681888607167133593607824882640735311858864332882735026936
    ipm: [0.999994357369053528316436916300843681888607167133593607824882640735311858864332882735026924 19401,
          0.999994357369053528316436916300843681888607167133593607824882640735311858864332882735026947 38947]
    gpm:  0.999994357369053528316436916300843681888607167133593607824882640735311858864332882735026935 85
    apm: [0.999994357369053528316436916300843681888607167133593607824882640735311858864332882735026936 +/- 3.93e-91]
cmath53:  0.999994357369054
  scplx:  0.9999943
  dcplx:  0.999994357369054
  ecplx:  0.9999945735905352835
  qcplx:  0.999994357369053528316436916300844
  ocplx:  0.999994357369053528316436916300843681888607167133593607824882640735311 86
  mcplx:  0.999994357369053528316436916300843681888607167133593607824882640735311858864332882735026935
sflintc:  0.9999943
dflintc:  0.999994357369054
eflintc:  0.9999945735905352 83
qflintc:  0.999994357369053528316436916300844
oflintc:  0.999994357369053528316436916300843681888607167133593607824882640735311 86
mflintc:  0.999994357369053528316436916300843681888607167133593607824882640735311858864332882735026935
aflintc: [0.999994357369053528316436916300843681888607167133593607824882640735311858864332882735026935 +/- 8.54e-91]
```

3.7.4 Auxiliary function $\mathrm{cotpi}(x) = \cot(\pi x)$

`ctx.cotpi(x)`

Returns $\cot(\pi x)$. See also BoostMath [98], Flint [742], Flint [732].

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.cotpi(x)))
    fpm:  -3.07768353717527
    mpm:  -3.0776835371752534025702905760369098240067021435377924270391562503748632884950909 1845459372
```

(continues on next page)

(continued from previous page)

```
    dpm:  -3.07768353717525340257029057603690982400670214353779242703915625037486328849509091845459382
    ipm: [-3.07768353717525340257029057603690982400670214353779242703915625037486328849509091845459759185,
          -3.07768353717525340257029057603690982400670214353779242703915625037486328849509091845459936747486]
    gpm:  -3.07768353717525340257029057603690982400670214353779242703915625037486328849509091845459937175
    apm: [-3.07768353717525340257029057603690982400670214353779242703915625037486328849509091845459937 +/- 8.07e-89]
 math53:  -3.07768353717527
  sreal:  -3.077687
  dreal:  -3.07768353717527
  ereal:  -3.0776835371752534053
  qreal:  -3.07768353717525340257029057603692
  oreal:  -3.077683537175253402570290576036909824006702143537792427039156250374863288495090918454593759185
  mreal:  -3.07768353717525340257029057603690982400670214353779242703915625037486328849509091845459375
 sflint:  -3.077687
 dflint:  -3.07768353717527
 eflint:  -3.0776835371752534055
 qflint:  -3.07768353717525340257029057603692
 oflint:  -3.077683537175253402570290576036909824006702143537792427039156250374863288495090918454593759185
 mflint:  -3.07768353717525340257029057603690982400670214353779242703915625037486328849509091845459375
 aflint: [-3.07768353717525340257029057603690982400670214353779242703915625037486328849509091845459937 +/- 7.51e-89]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.cotpi(x)))
    fpm:  (-4.09963994608524E-06, -1.00000564264598)
    mpm:  (-0.00000409963994608524943919729258585552597809979183824563087760113330570414668520488298157138929,
↪-1.00000564264597898248813301947472655207588156077 8)
cmath53:  (-4.0996399460156E-06, -1.00000564264598)
  qcplx:  (-4.0996399460852494391972925859295 4e-06, -1.00000564264597898248813301947473)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.cotpi(x))))
    fpm:  -4.09963994608524E-06
    mpm:  -0.00000409963994608524943919729258585552597809979183824563087760113330570414668520488298157138929
    dpm:  -0.00000409963994608524943919729258585552597809979183824563087760113330570414668520488298157134527
    ipm: [-0.00000409963994608524943919729258585552597809979183824563087760113330570414668520488298157986233849 72,
          -0.00000409963994608524943919729258585552597809979183824563087760113330570414668520488298156278790434 25]
    gpm:  -4.09963994608524943919729258585552597809979183824563087760113330570414668520488298157135302 37e-06
    apm: [-4.09963994608524943919729258585552597809979183824563087760113330570414668520488298157134 54e-6 +/- 6.04e-95]
cmath53:  -4.0996399460156E-06
  scplx:  -4.120109E-06
  dcplx:  -4.0996399460156E-06
  ecplx:  -4.0996399460852032389e-06
  qcplx:  -4.0996399460852494391972925859295 4e-06
  ocplx:  -4.0996399460852494391972925858555259780997918382456308776011333057037692e-06
  mcplx:  -4.0996399460852494391972925858555259780997918382456308776011333057041466852048829815713454 2E-06
sflintc:  -4.099636E-06
dflintc:  -4.09963994608524E-06
eflintc:  -4.0996399460852494361e-06
qflintc:  -4.0996399460852494391972925858555 2e-06
oflintc:  -4.0996399460852494391972925858555259780997918382456308776011333057041462e-06
mflintc:  -4.0996399460852494391972925858555259780997918382456308776011333057041466852048829815713454 2E-06
aflintc: [-4.0996399460852494391972925858555259780997918382456308776011333057041466852048829815713454e-6 +/- 5.64e-95]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.cotpi(x))))
    fpm:  -1.00000564264598
```

(continues on next page)

(continued from previous page)

```
    mpm:  -1.000005642645978982488133019474726552075881560777958366596668475428464011057978122150725623277,
          -1.000005642645978982488133019474726552075881560777958366596668475428464011057978122150725390095]
    gpm:  -1.00000564264597898248813301947472655207588156077795836659666847542846401105797812282150725505
    apm: [-1.000005642645978982488133019474726552075881560777958366596668475428464011057978122150725505 +/- 7.92e-91]
cmath53:  -1.00000564264598
  scplx:  -1.000006
  dcplx:  -1.00000564264598
  ecplx:  -1.0000056426459789825
  qcplx:  -1.000005642645978982488133019474733
  ocplx:  -1.000005642645978982488133019474726552075881560777958366596668475428464
  mcplx:  -1.000005642645978982488133019474726552075881560777958366596668475428464011057978122150725505
sflintc:  -1.000006
dflintc:  -1.00000564264598
eflintc:  -1.0000056426459789825
qflintc:  -1.000005642645978982488133019474733
oflintc:  -1.000005642645978982488133019474726552075881560777958366596668475428464
mflintc:  -1.000005642645978982488133019474726552075881560777958366596668475428464011057978122150725505
aflintc: [-1.000005642645978982488133019474726552075881560777958366596668475428464011057978122150725505 +/- 1.29e-90]
```

3.7.5 Auxiliary function $\mathrm{cscpi}(x) = \csc(\pi x)$

`ctx.cscpi(x)`

Returns $\mathrm{cscpi}(x)$. See also BoostMath [98], Flint [742], Flint [732].

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.cscpi(x)))
    fpm:  3.2360679774998
    mpm:  3.23606797749978969640917366873127623544061835961152572427089724541052092563780489941441444
    dpm:  3.23606797749978969640917366873127623544061835961152572427089724541052092563780489941441445
    ipm: [3.23606797749978969640917366873127623544061835961152572427089724541052092563780489941441443645355,
          3.23606797749978969640917366873127623544061835961152572427089724541052092563780489941441444435719]
    gpm:  3.23606797749978969640917366873127623544061835961152572427089724541052092563780489941441444043
    apm: [3.23606797749978969640917366873127623544061835961152572427089724541052092563780489941441444 +/- 6.68e-89]
 math53:  3.2360679774998
  sreal:  3.236071
  dreal:  3.2360679774998
  ereal:  3.236067977499789699
  qreal:  3.23606797749978969640917366873129
  oreal:  3.23606797749978969640917366873127623544061835961152572427089724541052 14
  mreal:  3.23606797749978969640917366873127623544061835961152572427089724541052092563780489941441443
 sflint:  3.236071
 dflint:  3.2360679774998
 eflint:  3.2360679774997896992
 qflint:  3.23606797749978969640917366873129
 oflint:  3.23606797749978969640917366873127623544061835961152572427089724541052 14
 mflint:  3.23606797749978969640917366873127623544061835961152572427089724541052092563780489941441443
 aflint: [3.23606797749978969640917366873127623544061835961152572427089724541052092563780489941441444 +/- 6.96e-89]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.cscpi(x)))
    fpm:  (0.00115415361758909, 0.00355209481339743)
    mpm:  (0.0011541536175890951363680648287908093898 39, 0.0035520948133974307118805548429547846572 46)
cmath53:  (0.0011541536175891, 0.00355209481339746)
  qcplx:  (0.001154153617589095136368064828790809389839, 0.003552094813397430711880554842954784657246)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.cscpi(x))))
    fpm:  0.00115415361758909
    mpm:  0.00115415361758909513636806482879080938983884532456861065644642758678033624236017830214127696
    dpm:  0.00115415361758909513636806482879080938983884532456861065644642758678033624236017830214127692
    ipm: [0.00115415361758909513636806482879080938983884532456861065644642758678033624236017830214127694052 38,
          0.00115415361758909513636806482879080938983884532456861065644642758678033624236017830214127698271 13]
    gpm:  0.00115415361758909513636806482879080938983884532456861065644642758678033624236017830214127696 23
    apm: [0.00115415361758909513636806482879080938983884532456861065644642758678033624236017830214127700 +/- 6.47e-92]
cmath53:  0.0011541536175891
  scplx:  0.001154152
  dcplx:  0.0011541536175891
  ecplx:  0.001154153617589095135 2
  qcplx:  0.00115415361758909513636806482879081
  ocplx:  0.0011541536175890951136806482879080938983884532456861065644642758678033 1
  mcplx:  0.00115415361758909513636806482879080938983884532456861065644642758678033624236017830214127695
sflintc:  0.001154153
dflintc:  0.00115415361758909
eflintc:  0.001154153617589095135 4
qflintc:  0.00115415361758909513636806482879081
oflintc:  0.0011541536175890951136806482879080938983884532456861065644642758678033 1
mflintc:  0.00115415361758909513636806482879080938983884532456861065644642758678033624236017830214127695
aflintc: [0.00115415361758909513636806482879080938983884532456861065644642758678033624236017830214127700 +/- 6.10e-92]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.cscpi(x))))
    fpm:  0.00355209481339743
    mpm:  0.00355209481339743071188055484295478465724619788624070812096817054239758750900458526159338708
    dpm:  0.00355209481339743071188055484295478465724619788624070812096817054239758750900458526159338706
    ipm: [0.00355209481339743071188055484295478465724619788624070812096817054239758750900458526159338705665 64,
          0.00355209481339743071188055484295478465724619788624070812096817054239758750900458526159338710939 08]
    gpm:  0.00355209481339743071188055484295478465724619788624070812096817054239758750900458526159338708 49
    apm: [0.00355209481339743071188055484295478465724619788624070812096817054239758750900458526159338712 +/- 2.62e-92]
cmath53:  0.00355209481339746
  scplx:  0.003552095
  dcplx:  0.00355209481339746
  ecplx:  0.0035520948133974307117
  qcplx:  0.00355209481339743071188055484295479
  ocplx:  0.0035520948133974307118805548429547846572461978862407081209681705423975875
  mcplx:  0.00355209481339743071188055484295478465724619788624070812096817054239758750900458526159338709
sflintc:  0.003552095
dflintc:  0.00355209481339743
eflintc:  0.0035520948133974307121
qflintc:  0.00355209481339743071188055484295479
oflintc:  0.0035520948133974307118805548429547846572461978862407081209681705423975876
mflintc:  0.00355209481339743071188055484295478465724619788624070812096817054239758750900458526159338709
aflintc: [0.00355209481339743071188055484295478465724619788624070812096817054239758750900458526159338712 +/- 2.69e-92]
```

3.7.6 Auxiliary function $\mathrm{secpi}(x) = \sec(\pi x)$

`ctx.secpi(x)`

Returns $\mathrm{secpi}(x)$. See also BoostMath [98], Flint [742], Flint [732].

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.secpi(x)))
    fpm:  -1.05146222423827
    mpm:  -1.05146222423826721205133816969575321457099586448668356305787104648242229280642803674326526
```

(continues on next page)

(continued from previous page)

```
    dpm:  -1.0514622242382672120513381696957532145709958644866835630578710464824222928064280367432652 5
    ipm: [-1.0514622242382672120513381696957532145709958644866835630578710464824222928064280367432652593737,
          -1.0514622242382672120513381696957532145709958644866835630578710464824222928064280367432652564282]
    gpm:  -1.0514622242382672120513381696957532145709958644866835630578710464824222928064280367432652577
    apm: [-1.0514622242382672120513381696957532145709958644866835630578710464824222928064280367432652 6 +/- 4.81e-90]
 math53:  -1.05146222423827
  sreal:  -1.051462
  dreal:  -1.05146222423827
  ereal:  -1.0514622242382672119
  qreal:  -1.0514622242382672120513381696957 5
  oreal:  -1.0514622242382672120513381696957532145709958644866835630578710464824223
  mreal:  -1.0514622242382672120513381696957532145709958644866835630578710464824222928064280367432652 6
 sflint:  -1.051462
 dflint:  -1.05146222423827
 eflint:  -1.0514622242382672119
 qflint:  -1.0514622242382672120513381696957 5
 oflint:  -1.0514622242382672120513381696957532145709958644866835630578710464824223
 mflint:  -1.0514622242382672120513381696957532145709958644866835630578710464824222928064280367432652 6
 aflint: [-1.0514622242382672120513381696957532145709958644866835630578710464824222928064280367432652 6 +/- 5.34e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.secpi(x)))
    fpm:  (-0.00355207950179819, 0.00115413254298072)
    mpm:  (-0.0035520795017981891449402471660886220540 9, 0.0011541325429807250308984757223147111604 6)
cmath53:  (-0.00355207950179821, 0.00115413254298073)
  qcplx:  (-0.0035520795017981891449402471660886 , 0.0011541325429807250308984757223147111 )
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.secpi(x))))
    fpm:  -0.00355207950179819
    mpm:  -0.0035520795017981891449402471660886220540488723637870108561483881635937871723515910180284798
    dpm:  -0.0035520795017981891449402471660886220540488723637870108561483881635937871723515910180284797978
    ipm: [-0.0035520795017981891449402471660886220540488723637870108561483881635937871723515910180284798263208,
          -0.0035520795017981891449402471660886220540488723637870108561483881635937871723515910180284797735864]
    gpm:  -0.0035520795017981891449402471660886220540488723637870108561483881635937871723515910180284798014
    apm: [-0.0035520795017981891449402471660886220540488723637870108561483881635937871723515910180284798 +/- 2.07e-92]
cmath53:  -0.00355207950179821
  scplx:  -0.003552079
  dcplx:  -0.00355207950179821
  ecplx:  -0.003552079501798189145
  qcplx:  -0.0035520795017981891449402471660886
  ocplx:  -0.003552079501798189144940247166088622054048872363787010856148388163593787
  mcplx:  -0.0035520795017981891449402471660886220540488723637870108561483881635937871723515910180284798 1
sflintc:  -0.00355208
dflintc:  -0.00355207950179819
eflintc:  -0.003552079501798189145 
qflintc:  -0.0035520795017981891449402471660886
oflintc:  -0.003552079501798189144940247166088622054048872363787010856148388163593787
mflintc:  -0.0035520795017981891449402471660886220540488723637870108561483881635937871723515910180284798 1
aflintc: [-0.0035520795017981891449402471660886220540488723637870108561483881635937871723515910180284798 +/- 4.15e-92]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.secpi(x))))
    fpm:  0.00115413254298072
    mpm:  0.0011541325429807250308984757223147111604462731816888362536393683682269273215873386397168363 3
```

(continues on next page)

(continued from previous page)

```
    dpm:  0.00115413254298072503089847572231471116044627318168883625363936836822692732158733863971683629
    ipm: [0.00115413254298072503089847572231471116044627318168883625363936836822692732158733863971683631111472,
          0.00115413254298072503089847572231471116044627318168883625363936836822692732158733863971683633333347]
    gpm:  0.00115413254298072503089847572231471116044627318168883625363936836822692732158733863971683633639716836333
    apm: [0.00115413254298072503089847572231471116044627318168883625363936836822692732158733863971683633639716836363 +/- 3.86e-92]
cmath53:  0.00115413254298073
  scplx:  0.001154131
  dcplx:  0.00115413254298073
  ecplx:  0.0011541325429807250 3089847572231471
  qcplx:  0.00115413254298072503089847572231471116044627318168883625363936836822692732158733863971683632
  ocplx:  0.00115413254298072503089847572231471116044627318168883625363936836822692732158733863971683633
  mcplx:  0.00115413254298072503089847572231471116044627318168883625363936836822692732158733863971683632
sflintc:  0.001154131
dflintc:  0.00115413254298072
eflintc:  0.0011541325429807250 3089847572231471
qflintc:  0.00115413254298072503089847572231471116044627318168883625363936836822692732158733863971683633
oflintc:  0.00115413254298072503089847572231471116044627318168883625363936836822692732158733863971683632
mflintc:  0.00115413254298072503089847572231471116044627318168883625363936836822692732158733863971683632
aflintc: [0.00115413254298072503089847572231471116044627318168883625363936836822692732158733863971683633639716836363 +/- 4.94e-92]
```

3.7.7 Auxiliary function $\mathrm{sincpi}(x) = \mathrm{sinc}(\pi x)$

`ctx.`**`sincpi`**`(`x`)`

where `ctx` is `math53`, `mathc53`, `ctxcpp`, `ctxflint`.

Returns the cardinal sine of x. See also Wikipedia [1286], MathWorld [929], BoostMath [127], Flint [742], Flint [732], Mpmath [536].

`sincpi(x)` computes the normalized sinc function, defined as $\mathrm{sinc}_\pi(x) = \begin{cases} \sin(\pi x)/(\pi x), & \text{if } x \neq 0 \\ 1, & \text{if } x = 0. \end{cases}$

We also have

$$\mathrm{sinc}(\pi z) = \frac{1}{\Gamma(1+z)\,\Gamma(1-z)}$$

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.sincpi(x)))
    fpm:  -0.0192868949624208
    mpm:  -0.019286894962420901320538977924449722596403712371029583230277556681623871964953597043618705 1
    dpm:  -0.019286894962420901320538977924449722596403712371029583230277556681623871964953597043618704
    ipm: [-0.019286894962420901320538977924449722596403712371029583230277556681623871964953597043618705310012,
          -0.019286894962420901320538977924449722596403712371029583230277556681623871964953597043618704826773]
    gpm:  -0.019286894962420901320538977924449722596403712371029583230277556681623871964953597043618705065
    apm: [-0.019286894962420901320538977924449722596403712371029583230277556681623871964953597043618705 +/- 2.98e-91]
 math53:  -0.0192868949624208
  sreal:  -0.01928688
  dreal:  -0.0192868949624209
  ereal:  -0.019286894962420901305
  qreal:  -0.0192868949624209013205389779244497
  oreal:  -0.019286894962420901320538977924449722596403712371029583230277556681623869
  mreal:  -0.019286894962420901320538977924449722596403712371029583230277556681623871964953597043618704 9
 sflint:  -0.01928688
 dflint:  -0.0192868949624208
 eflint:  -0.019286894962420901305
 qflint:  -0.0192868949624209013205389779244497
 oflint:  -0.019286894962420901320538977924449722596403712371029583230277556681623869
 mflint:  -0.019286894962420901320538977924449722596403712371029583230277556681623871964953597043618704 9
 aflint: [-0.019286894962420901320538977924449722596403712371029583230277556681623871964953597043618705 +/- 2.79e-91]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.sincpi(x)))
    fpm:  (-9.87753845876023, 12.0195137234118)
    mpm:  (-9.8775384587602436631166598904660711152746120446789, 12.019513723411815136072818810433859896717349963575)
cmath53:  (-9.87753845876024, 12.0195137234118)
  qcplx:  (-9.877538458760243663116659890466071115274612044679011716201640369682032616677558905961696 4, 12.019513723411815136072818810433)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.sincpi(x))))
    fpm:  -9.87753845876023
    mpm:  -9.8775384587602436631166598904660711152746120446790117162016403696820326166775589059616963 8
    dpm:  -9.8775384587602436631166598904660711152746120446790117162016403696820326166775589059616963 6
    ipm: [-9.8775384587602436631166598904660711152746120446790117162016403696820326166775589059616964528107,
          -9.8775384587602436631166598904660711152746120446790117162016403696820326166775589059616963055379]
    gpm:  -9.877538458760243663116659890466071115274612044679011716201640369682032616677558905961696374 3
    apm: [-9.877538458760243663116659890466071115274612044679011716201640369682032616677558905961696 3 +/- 9.61e-89]
cmath53:  -9.87753845876024
  scplx:  -9.877534
  dcplx:  -9.87753845876017
  ecplx:  -9.8775384587602436609
  qcplx:  -9.877538458760243663116659890466
  ocplx:  -9.8775384587602436631166598904660711152746120446790117162016403696820323
  mcplx:  -9.8775384587602436631166598904660711152746120446790117162016403696820326166775589059616963 3
sflintc:  -9.877535
dflintc:  -9.87753845876023
eflintc:  -9.8775384587602436601
qflintc:  -9.877538458760243663116659890466
oflintc:  -9.8775384587602436631166598904660711152746120446790117162016403696820321
mflintc:  -9.8775384587602436631166598904660711152746120446790117162016403696820326166775589059616963 3
aflintc: [-9.877538458760243663116659890466071115274612044679011716201640369682032616677558905961696 +/- 3.99e-88]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.sincpi(x))))
    fpm:  12.0195137234118
    mpm:  12.019513723411815136072818810433859896717349963575022882662758594879256809917199513265578 1
    dpm:  12.019513723411815136072818810433859896717349963575022882662758594879256809917199513265578 3
    ipm: [12.019513723411815136072818810433859896717349963575022882662758594879256809917199513265578 0087197,
          12.019513723411815136072818810433859896717349963575022882662758594879256809917199513265578 2201088]
    gpm:  12.019513723411815136072818810433859896717349963575022882662758594879256809917199513265578 138
    apm: [12.019513723411815136072818810433859896717349963575022882662758594879256809917199513265578 2 +/- 7.59e-89]
cmath53:  12.0195137234118
  scplx:  12.01952
  dcplx:  12.0195137234118
  ecplx:  12.019513723411815141
  qcplx:  12.019513723411815136072818810433
  ocplx:  12.019513723411815136072818810433859896717349963575022882662758594879258
  mcplx:  12.019513723411815136072818810433859896717349963575022882662758594879256809917199513265578 2
sflintc:  12.01952
dflintc:  12.0195137234118
eflintc:  12.019513723411815139
qflintc:  12.019513723411815136072818810433
oflintc:  12.019513723411815136072818810433859896717349963575022882662758594879257
mflintc:  12.019513723411815136072818810433859896717349963575022882662758594879256809917199513265578 2
aflintc: [12.019513723411815136072818810433859896717349963575022882662758594879256809917199513265578 +/- 2.15e-88]
```

3.8 Hyperbolic functions

For a general introduction into hyperbolic functions, see Wikipedia [1233], NIST [483].

3.8.1 Hyperbolic sine, $\sinh(x)$

`ctx.sinh(x)`

where `ctx` is `math53`, `mathc53`, `ctxcpp`, `ctxflint`.

Returns the hyperbolic sine of x, $\sinh(x)$. See also Wikipedia [1233], MathWorld [861], NIST [483], Ehrhardt [295] (4.2.56), Flint [736], Flint [726], Mpmath [563].

The hyperbolic sine can be expressed in terms of the exponential function as $\sinh(x) = \dfrac{e^x - e^{-x}}{2} = \dfrac{e^{2x-1}}{2e^x} = \dfrac{1 - e^{-2x}}{2e^x}$.

The complex hyperbolic sine can be expressed in terms of related functions:

$$\sinh(z) = \frac{e^z - e^{-z}}{2} = \frac{e^{2z-1}}{2e^z} = \frac{1 - e^{-2z}}{2e^z} = -i\sin(iz)$$

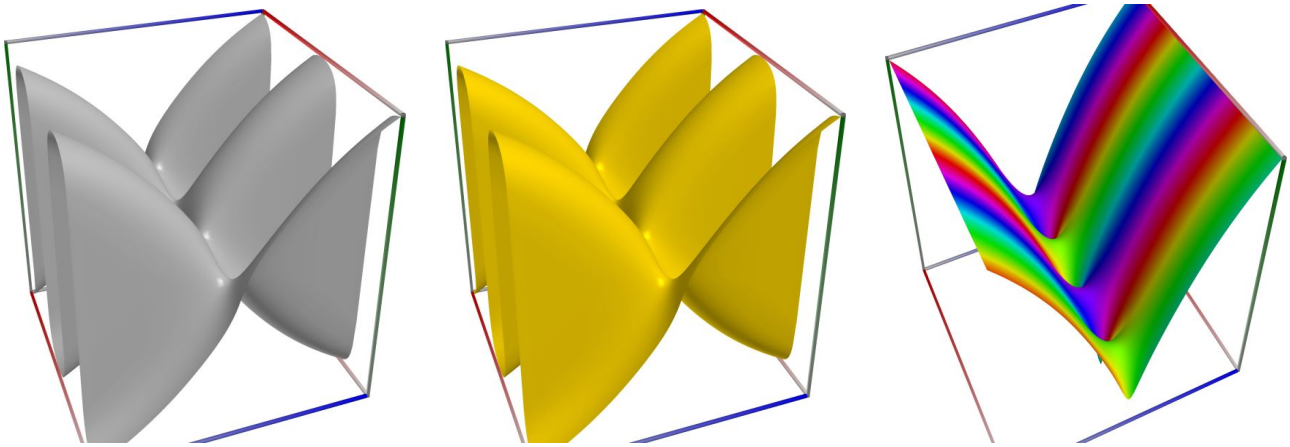

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.sinh(x)))
    fpm:  -82.0079052766681
    mpm:  -82.00790527666811415452056336861775139413940103282374808353572254366366417112055069939861090
    dpm:  -82.00790527666811415452056336861775139413940103282374808353572254366366417112055069939861090
    ipm: [-82.00790527666811415452056336861775139413940103282374808353572254366366417112055069939861090531,
          -82.00790527666811415452056336861775139413940103282374808353572254366366417112055069939861081105]
    gpm:  -82.00790527666811415452056336861775139413940103282374808353572254366366417112055069939861090
    apm: [-82.00790527666811415452056336861775139413940103282374808353572254366366417112055069939861090 +/- 2.87e-88]
 math53:  -82.0079052766681
  sreal:  -82.0079
  dreal:  -82.0079052766681
  ereal:  -82.00790527666811415
  qreal:  -82.00790527666811415452056336861770
  oreal:  -82.00790527666811415452056336861775139413940103282374808353572254366366
  mreal:  -82.00790527666811415452056336861775139413940103282374808353572254366366417112055069939861080
 sflint:  -82.0079
 dflint:  -82.0079052766681
```

(continues on next page)

(continued from previous page)

```
 eflint:  -82.00790527666811415
 qflint:  -82.007905276668114154520563368617751394139401032823748083535722543663663
 oflint:  -82.007905276668114154520563368617751394139401032823748083535722543663664171120550699398610 8
 mflint:  -82.007905276668114154520563368617751394139401032823748083535722543663664171120550699398610 8
 aflint: [-82.007905276668114154520563368617751394139401032823748083535722543663664171120550699398611 +/- 3.55e-88]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.sinh(x)))
    fpm:  (34.1273303527431, 74.5751210034026)
    mpm:  (34.127330352743141373237210523324556546037419592941, 74.575121003402592002010831565803552676912221630500407960603836527843615129105284036390891)
cmath53:  (34.1273303527431, 74.5751210034026)
  qcplx:  (34.127330352743141373237210523324556546037419592940901201194011278846017798636863613683304524982)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.sinh(x))))
    fpm:  34.1273303527431
    mpm:  34.127330352743141373237210523324556546037419592940901201194011278846017798636863613683304524982
    dpm:  34.127330352743141373237210523324556546037419592940901201194011278846017798636863613683304524982
    ipm: [34.127330352743141373237210523324556546037419592940901201194011278846017798636863613683304524982,
          34.127330352743141373237210523324556546037419592940901201194011278846017798636863613683304524982]
    gpm:  34.127330352743141373237210523324556546037419592940901201194011278846017798636863613683304524982
    apm: [34.127330352743141373237210523324556546037419592940901201194011278846017798636863613683304524982 +/- 8.38e-89]
cmath53:  34.1273303527431
  scplx:  34.12733
  dcplx:  34.1273303527431
  ecplx:  34.127330352743141372
  qcplx:  34.127330352743141373237210523324556546037419592940901201194011278846018
  ocplx:  34.127330352743141373237210523324556546037419592940901201194011278846017798636863613683304524982
  mcplx:  34.127330352743141373237210523324556546037419592940901201194011278846017798636863613683304524982
sflintc:  34.12733
dflintc:  34.1273303527431
eflintc:  34.127330352743141369
qflintc:  34.127330352743141373237210523324556546037419592940901201194011278846017798636863613683304524982
oflintc:  34.127330352743141373237210523324556546037419592940901201194011278846017798636863613683304524982
mflintc:  34.127330352743141373237210523324556546037419592940901201194011278846017798636863613683304524982
aflintc: [34.127330352743141373237210523324556546037419592940901201194011278846017798636863613683304 +/- 5.31e-88]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.sinh(x))))
    fpm:  74.5751210034026
    mpm:  74.575121003402592002010831565803552676912221630500407960603836527843615129105284036390891
    dpm:  74.575121003402592002010831565803552676912221630500407960603836527843615129105284036390891
    ipm: [74.575121003402592002010831565803552676912221630500407960603836527843615129105284036390890944533,
          74.575121003402592002010831565803552676912221630500407960603836527843615129105284036390891023078]
    gpm:  74.575121003402592002010831565803552676912221630500407960603836527843615129105284036390891023
    apm: [74.575121003402592002010831565803552676912221630500407960603836527843615129105284036390891 +/- 2.02e-88]
cmath53:  74.5751210034026
  scplx:  74.57511
  dcplx:  74.5751210034026
  ecplx:  74.575121003402591993
  qcplx:  74.575121003402592002010831565803552676912221630500407960603836527843616
  ocplx:  74.575121003402592002010831565803552676912221630500407960603836527843616
  mcplx:  74.575121003402592002010831565803552676912221630500407960603836527843615129105284036390891
sflintc:  74.57511
dflintc:  74.5751210034026
```

(continues on next page)

(continued from previous page)

```
eflintc:  74.575121003402591993
qflintc:  74.575121003402592002010831565803552676912221630500407960603836527843614
oflintc:  74.575121003402592002010831565803552676912221630500407960603836527843615129105284036390890 9
mflintc:  74.575121003402592002010831565803552676912221630500407960603836527843615129105284036390890 9
aflintc: [74.575121003402592002010831565803552676912221630500407960603836527843615129105284036390891 +/- 4.07e-88]
```

3.8.2 Hyperbolic cosine, $\cosh(x)$

`ctx.cosh`(x)

where `ctx` is `math53`, `mathc53`, `ctxcpp`, `ctxflint`.

Returns the hyperbolic cosine of x, $\cosh(x)$. See also Wikipedia [1233], MathWorld [858], NIST [483], Ehrhardt [295] (4.2.20), Flint [736], Flint [726], Mpmath [560].

The hyperbolic cosine can be expressed in terms of the exponential function as $\cosh(x) = \dfrac{e^x + e^{-x}}{2} = \dfrac{e^{2x+1}}{2e^x} = \dfrac{1 + e^{-2x}}{2e^x}$.

The complex hyperbolic cosine can be expressed in terms of related functions:

$$\cosh(z) = \frac{e^z + e^{-z}}{2} = \frac{e^{2z+1}}{2e^z} = \frac{1 + e^{-2z}}{2e^z} = \cos(iz)$$

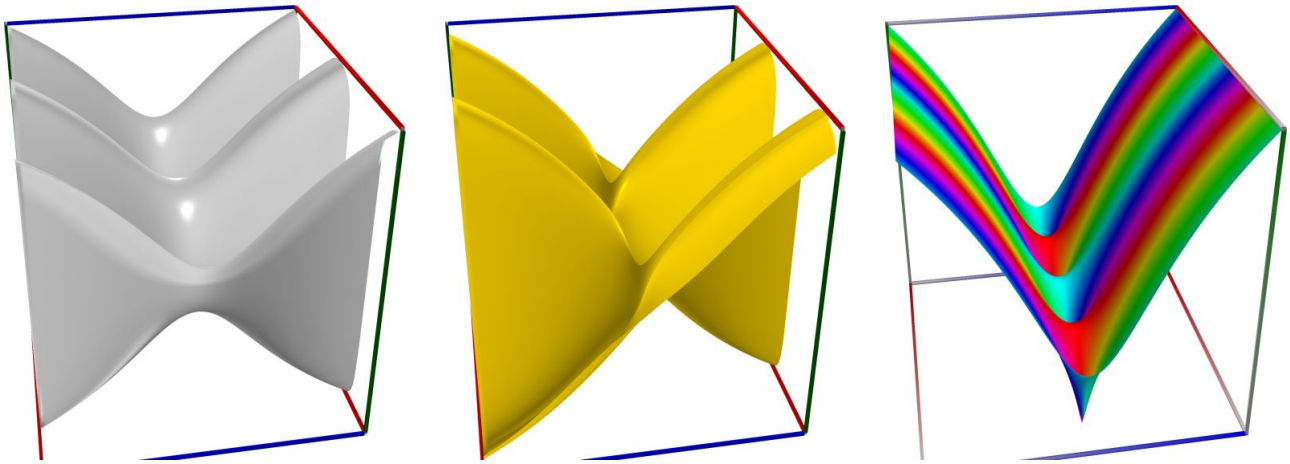

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.cosh(x)))
    fpm:  82.0140020232336
    mpm:  82.014002023233629790627697933403176295928461074904416180844116259359621147488290047724371
    dpm:  82.014002023233629790627697933403176295928461074904416180844116259359621147488290047724371
    ipm: [82.014002023233629790627697933403176295928461074904416180844116259359621147488290047724370947407,
          82.014002023233629790627697933403176295928461074904416180844116259359621147488290047724371041662]
    gpm:  82.014002023233629790627697933403176295928461074904416180844116259359621147488290047724371042
    apm: [82.014002023233629790627697933403176295928461074904416180844116259359621147488290047724371 +/- 1.51e-88]
 math53:  82.0140020232336
  sreal:  82.01399
  dreal:  82.0140020232336
  ereal:  82.014002023233629785
  qreal:  82.014002023233629790627697933403 2
  oreal:  82.014002023233629790627697933403176295928461074904416180844116259359622
```

(continues on next page)

(continued from previous page)

```
  mreal:  82.014002023233629790627697933403176295928461074904416180844116259359621147488290047724371
 sflint:  82.01399
 dflint:  82.0140020232336
 eflint:  82.014002023233629785
 qflint:  82.01400202323362979062769793340 32
 oflint:  82.014002023233629790627697933403176295928461074904416180844116259359 62
 mflint:  82.014002023233629790627697933403176295928461074904416180844116259359621147488290047724371
 aflint: [82.014002023233629790627697933403176295928461074904416180844116259359621147488290047724371 +/- 2.35e-88]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.cosh(x)))
    fpm:  (-34.1298674945396, -74.5695772474385)
    mpm:  (-34.129867494539610360380497380623289780976115264134, -74.569577247438560321695246634081220109249101472313)
cmath53:  (-34.1298674945396, -74.5695772474385)
  qcplx:  (-34.129867494539610360380497380623 3, -74.569577247438560321695246634081 2)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.cosh(x))))
    fpm:  -34.1298674945396
    mpm:  -34.129867494539610360380497380623289780976115264134135451569914063737128670292178817913625 4
    dpm:  -34.129867494539610360380497380623289780976115264134135451569914063737128670292178817913625 4
    ipm: [-34.129867494539610360380497380623289780976115264134135451569914063737128670292178817913625440466,
          -34.129867494539610360380497380623289780976115264134135451569914063737128670292178817913625401194]
    gpm:  -34.129867494539610360380497380623289780976115264134135451569914063737128670292178817913625433
    apm: [-34.129867494539610360380497380623289780976115264134135451569914063737128670292178817913625 4 +/- 6.05e-89]
cmath53:  -34.1298674945396
  scplx:  -34.12986
  dcplx:  -34.1298674945396
  ecplx:  -34.12986749453961036
  qcplx:  -34.129867494539610360380497380623 3
  ocplx:  -34.129867494539610360380497380623289780976115264134135451569914063737129
  mcplx:  -34.129867494539610360380497380623289780976115264134135451569914063737128670292178817913625 4
sflintc:  -34.12986
dflintc:  -34.1298674945396
eflintc:  -34.129867494539610356
qflintc:  -34.129867494539610360380497380623 3
oflintc:  -34.129867494539610360380497380623289780976115264134135451569914063737128
mflintc:  -34.129867494539610360380497380623289780976115264134135451569914063737128670292178817913625 4
aflintc: [-34.129867494539610360380497380623289780976115264134135451569914063737128670292178817913625 +/- 4.39e-88]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.cosh(x))))
    fpm:  -74.5695772474385
    mpm:  -74.569577247438560321695246634081220109249101472313127318851961708415297921565408416814171 9
    dpm:  -74.569577247438560321695246634081220109249101472313127318851961708415297921565408416814171 9
    ipm: [-74.569577247438560321695246634081220109249101472313127318851961708415297921565408416814171945 3,
          -74.569577247438560321695246634081220109249101472313127318851961708415297921565408416814171850776]
    gpm:  -74.569577247438560321695246634081220109249101472313127318851961708415297921565408416814171929
    apm: [-74.569577247438560321695246634081220109249101472313127318851961708415297921565408416814172 +/- 2.80e-88]
cmath53:  -74.5695772474385
  scplx:  -74.56956
  dcplx:  -74.5695772474385
  ecplx:  -74.569577247438560315
  qcplx:  -74.569577247438560321695246634081 2
  ocplx:  -74.569577247438560321695246634081220109249101472313127318851961708415299
```

(continues on next page)

(continued from previous page)

```
  mcplx:  -74.569577247438560321695246634081220109249101472313127318851961708415297921565408416814171 9
sflintc:  -74.56957
dflintc:  -74.5695772474385
eflintc:  -74.569577247438560315
qflintc:  -74.569577247438560321695246634081220
oflintc:  -74.569577247438560321695246634081220109249101472313127318851961708415297
mflintc:  -74.569577247438560321695246634081220109249101472313127318851961708415297921565408416814171 9
aflintc: [-74.569577247438560321695246634081220109249101472313127318851961708415297921565408416814172 +/- 4.70e-88]
```

3.8.3 Hyperbolic tangent, $\tanh(x)$

`ctx.tanh(x)`

where `ctx` is `math53`, `mathc53`, `ctxcpp` or `ctxflint`.

Returns the hyperbolic tangent of x, $\tanh(x)$. See also Wikipedia [1233], MathWorld [862], NIST [483], Ehrhardt [295] (4.2.62), Flint [736], Flint [726], Mpmath [564].

The hyperbolic tangent can be expressed in terms of the exponential function as $\tanh(x) = \dfrac{\sinh(x)}{\cosh(x)} = \dfrac{e^x - e^{-x}}{e^x + e^{-x}} = \dfrac{e^{2x-1}}{e^{2x+1}}$.

The complex hyperbolic tangent can be expressed in terms of related functions:

$$\tanh(z) = \frac{\sinh(z)}{\cosh(z)} = \frac{e^z - e^{-z}}{e^z + e^{-z}} = \frac{e^{2z-1}}{e^{2z+1}} = -i\tan(iz)$$

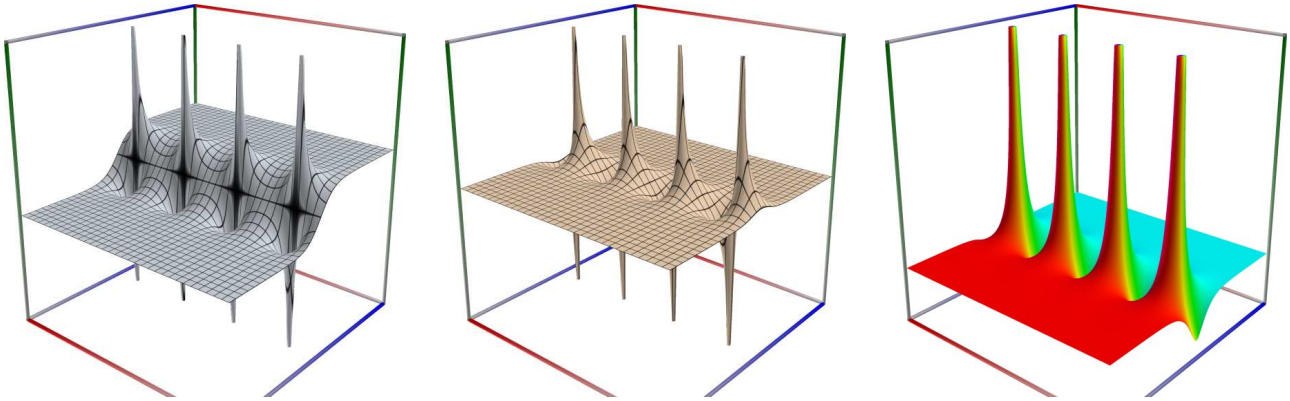

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.tanh(x)))
    fpm:  -0.999925662125794
    mpm:  -0.99992566212579422112021292112676273931206931833766880551384319417468968874845416567431191 5
    dpm:  -0.99992566212579422112021292112676273931206931833766880551384319417468968874845416567431191 5
    ipm: [-0.99992566212579422112021292112676273931206931833766880551384319417468968874845416567431191705008,
          -0.99992566212579422112021292112676273931206931833766880551384319417468968874845416567431191238644]
    gpm:  -0.99992566212579422112021292112676273931206931833766880551384319417468968874845416567431191472
    apm: [-0.99992566212579422112021292112676273931206931833766880551384319417468968874845416567431191 5 +/- 4.05e-91]
 math53:  -0.999925662125794
  sreal:  -0.9999257
  dreal:  -0.999925662125794
  ereal:  -0.9999256621257942211
  qreal:  -0.99992566212579422112021292112676 3
```

(continues on next page)

(continued from previous page)

```
  oreal:  -0.99992566212579422112021292112676273931206931833766880551384319417468969
  mreal:  -0.99992566212579422112021292112676273931206931833766880551384319417468968874845416567431 1915
 sflint:  -0.9999257
 dflint:  -0.999925662125794
 eflint:  -0.9999256621257942211
 qflint:  -0.999925662125794221120212921126763
 oflint:  -0.99992566212579422112021292112676273931206931833766880551384319417468969
 mflint:  -0.99992566212579422112021292112676273931206931833766880551384319417468968874845416567431 1915
 aflint: [-0.99992566212579422112021292112676273931206931833766880551384319417468968874845416567431 1914 +/- 8.42e-91]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.tanh(x)))
    fpm:  (-1.00004859188124, -5.62639137773827E-05)
    mpm:  (-1.000048591881244839347523551773111454670820934557428358198012629606951956281166278662830827219, -0.
↪0000562639137773826543899214053585804673419863396679015681214248322560602571931291062300173585)
cmath53:  (-1.00004859188124, -5.62639137775E-05)
  qcplx:  (-1.000048591881244839347523551773111, -5.626391377738265438992140535858046734198633966790156812142483225606025719312910623001735 85e-05)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.tanh(x))))
    fpm:  -1.00004859188124
    mpm:  -1.000048591881244839347523551773111454670820934557428358198012629606951956281166278662830 8
    dpm:  -1.000048591881244839347523551773111454670820934557428358198012629606951956281166278662830 8
    ipm: [-1.000048591881244839347523551773111454670820934557428358198012629606951956281166278662830827219,
          -1.000048591881244839347523551773111454670820934557428358198012629606951956281166278662830778128]
    gpm:  -1.00004859188124483934752355177311145467082093455874283581980126296069519562811662786628303
    apm: [-1.000048591881244839347523551773111454670820934557428358198012629606951956281166278662830 8 +/- 2.68e-91]
cmath53:  -1.00004859188124
  scplx:  -1.000049
  dcplx:  -1.00004859188124
  ecplx:  -1.0000485918812448393
  qcplx:  -1.000048591881244839347523551773 11
  ocplx:  -1.000048591881244839347523551773111454670820934557428358198012629606952
  mcplx:  -1.000048591881244839347523551773111454670820934557428358198012629606951956281166278662830 8
sflintc:  -1.000049
dflintc:  -1.00004859188124
eflintc:  -1.0000485918812448393
qflintc:  -1.000048591881244839347523551773 11
oflintc:  -1.000048591881244839347523551773111454670820934557428358198012629606952
mflintc:  -1.000048591881244839347523551773111454670820934557428358198012629606951956281166278662830 8
aflintc: [-1.000048591881244839347523551773111454670820934557428358198012629606951956281166278662830 8 +/- 1.21e-90]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.tanh(x))))
    fpm:  -5.62639137773827E-05
    mpm:  -0.000056263913777382654389921405358580467341986339667901568121424832256060257193129106230017358 5
    dpm:  -0.000056263913777382654389921405358580467341986339667901568121424832256060257193129106230017358 5
    ipm: [-0.000056263913777382654389921405358580467341986339667901568121424832256060257193129106230018310101547,
          -0.000056263913777382654389921405358580467341986339667901568121424832256060257193129106230016475071683]
    gpm:  -5.626391377738265438992140535858046734198633966790156812142483225606025719312910623001735 8e-05
    apm: [-5.626391377738265438992140535858046734198633966790156812142483225606025719312910623001735 9e-5 +/- 5.25e-94]
cmath53:  -5.62639137775E-05
  scplx:  -5.626392E-05
  dcplx:  -5.62639137775E-05
  ecplx:  -5.626391377738265440 2e-05
```

(continues on next page)

(continued from previous page)

```
  qcplx:  -5.626391377738265438992140535858046734198633966790156812142483225606025719312910623001735 86E-05
  ocplx:  -5.626391377738265438992140535858046734198633966790156812142483225606025719312910623001735 86E-05
  mcplx:  -5.626391377738265438992140535858046734198633966790156812142483225606025719312910623001735 86E-05
sflintc:  -5.626393E-05
dflintc:  -5.62639137773827E-05
eflintc:  -5.626391377382654399e-05
qflintc:  -5.626391377738265438992140535858046734198633966790156812142483225606025719312910623001735 86E-05
oflintc:  -5.626391377738265438992140535858046734198633966790156812142483225606025719312910623001735 86E-05
mflintc:  -5.626391377738265438992140535858046734198633966790156812142483225606025719312910623001735 86E-05
aflintc: [-5.626391377738265438992140535858046734198633966790156812142483225606025719312910623001735 9e-5 +/- 5.54e-94]
```

3.8.4 Hyperbolic cotangent, $\coth(x)$

`ctx.coth`(x)

where `ctx` is `math53`, `mathc53`, `ctxcpp` or `ctxflint`.

Returns the hyperbolic cotangent of x, $\coth(x)$. See also Wikipedia [1233], MathWorld [859], NIST [483], Ehrhardt [295] (4.2.22), Flint [736], Flint [726], Mpmath [561].

The hyperbolic cotangent can be expressed in terms of related functions as $\coth(x) = \dfrac{\cosh(x)}{\sinh(x)} = \dfrac{e^x + e^{-x}}{e^x - e^{-x}} = \dfrac{e^{2x+1}}{e^{2x-1}}$.

The complex hyperbolic cotangent can be expressed in terms of related functions:

$$\coth(z) = \frac{\cosh(z)}{\sinh(z)} = \frac{e^z + e^{-z}}{e^z - e^{-z}} = \frac{e^{2z+1}}{e^{2z-1}} = i \cdot \cot(iz)$$

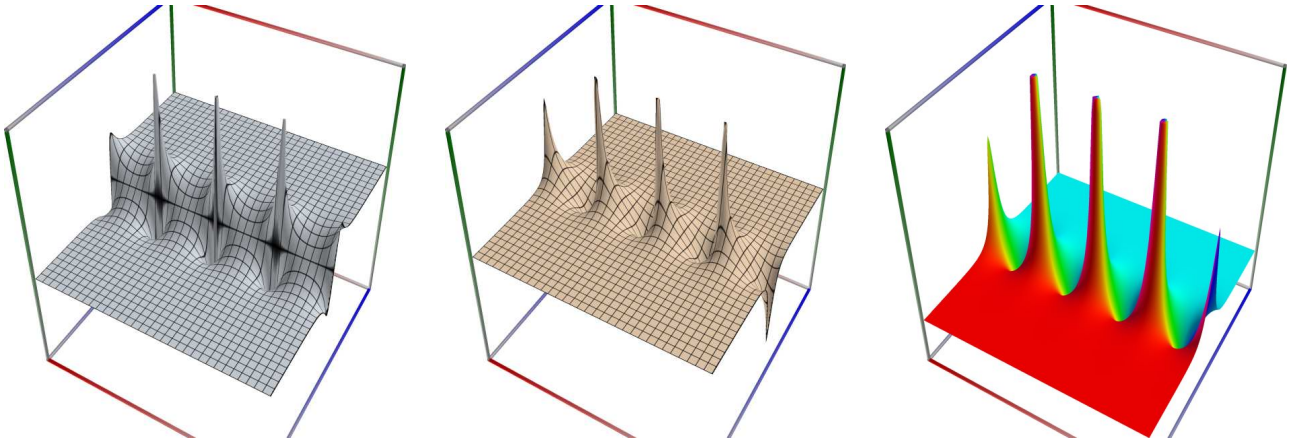

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \leq x \leq 6$ (blue axis), $-6 \leq y \leq 6$ (red axis), $-10 \leq z \leq 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.coth(x)))
    fpm:  -1.00007434340074
    mpm:  -1.000074343400736150833576713340936325698919164434613541282672363036212120521649519593236 5
    dpm:  -1.000074343400736150833576713340936325698919164434613541282672363036212120521649519593236 5
    ipm: [-1.000074343400736150833576713340936325698919164434613541282672363036212120521649519593236 5021592,
          -1.000074343400736150833576713340936325698919164434613541282672363036212120521649519593236 4972501]
    gpm:  -1.000074343400736150833576713340936325698919164434613541282672363036212120521649519593236 4997
    apm: [-1.000074343400736150833576713340936325698919164434613541282672363036212120521649519593236 50 +/- 5.42e-91]
 math53:  -1.00007434340074
```

(continues on next page)

(continued from previous page)

```
  sreal:  -1.000074
  dreal:  -1.00007434340074
  ereal:  -1.0000743434007361508
  qreal:  -1.000074343400736150833576713340936325698919164434613541282672363036212120521649519593236
  oreal:  -1.000074343400736150833576713340936325698919164434613541282672363036212120521649519593236
  mreal:  -1.000074343400736150833576713340936325698919164434613541282672363036212120521649519593236
 sflint:  -1.000074
 dflint:  -1.00007434340074
 eflint:  -1.0000743434007361508
 qflint:  -1.000074343400736150833576713340936325698919164434613541282672363036212120521649519593236
 oflint:  -1.000074343400736150833576713340936325698919164434613541282672363036212120521649519593236
 mflint:  -1.000074343400736150833576713340936325698919164434613541282672363036212120521649519593236
 aflint: [-1.000074343400736150833576713340936325698919164434613541282672363036212120521649519593236 +/- 2.02e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.coth(x)))
    fpm:  (-0.999951407314645, 5.62584460589937E-05)
    mpm:  (-0.99995140731464479848751791560677431207672796827437866649277296544485155617638893169663820599667, 0.00005625844605899370002512314070473795787144)
cmath53:  (-0.999951407314645, 5.62584460589937E-05)
  qcplx:  (-0.99995140731464479848751791560677431207672796827437866649277296544485155617638893169663820599667, 5.625844605899370002512314070473795787144E-05)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.coth(x))))
    fpm:  -0.999951407314645
    mpm:  -0.999951407314644798487517915606774312076727968274378666492772965444851556176388931696638204
    dpm:  -0.999951407314644798487517915606774312076727968274378666492772965444851556176388931696638204
    ipm: [-0.999951407314644798487517915606774312076727968274378666492772965444851556176388931696638204,
          -0.999951407314644798487517915606774312076727968274378666492772965444851556176388931696638204]
    gpm:  -0.999951407314644798487517915606774312076727968274378666492772965444851556176388931696638204
    apm: [-0.999951407314644798487517915606774312076727968274378666492772965444851556176388931696638204 +/- 4.58e-91]
cmath53:  -0.999951407314645
  scplx:  -0.9999515
  dcplx:  -0.999951407314645
  ecplx:  -0.99995140731464479856
  qcplx:  -0.999951407314644798487517915606774
  ocplx:  -0.999951407314644798487517915606774312076727968274378666492772965444851554
  mcplx:  -0.999951407314644798487517915606774312076727968274378666492772965444851556176388931696638204
sflintc:  -0.9999514
dflintc:  -0.999951407314645
eflintc:  -0.99995140731464479851
qflintc:  -0.999951407314644798487517915606774
oflintc:  -0.999951407314644798487517915606774312076727968274378666492772965444851555
mflintc:  -0.999951407314644798487517915606774312076727968274378666492772965444851556176388931696638204
aflintc: [-0.999951407314644798487517915606774312076727968274378666492772965444851556176388931696638204 +/- 9.49e-91]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.coth(x))))
    fpm:  5.62584460589937E-05
    mpm:  0.000056258446058993700025123140704737957871439041911576336159120006859366446995363486246000153 82
    dpm:  0.000056258446058993700025123140704737957871439041911576336159120006859366446995363486246000153 82
    ipm: [0.000056258446058993700025123140704737957871439041911576336159120006859366446995363486246000654867428,
          0.000056258446058993700025123140704737957871439041911576336159120006859366446995363486246002489702534]
    gpm:  5.625844605899370002512314070473795787143904191157633615912000685936644699536348624600153 8191e-05
    apm: [5.625844605899370002512314070473795787143904191157633615912000685936644699536348624600153 8e-5 +/- 4.18e-94]
cmath53:  5.62584460589937E-05
```

(continues on next page)

(continued from previous page)

```
  scplx:  5.625846E-05
  dcplx:  5.6258446059111E-05
  ecplx:  5.625844605899370002512314070473795787143904191157633615912000685936153e-05
  qcplx:  5.625844605899370002512314070473795787143904191157633615912000685936153e-05
  ocplx:  5.625844605899370002512314070473795787143904191157633615912000685936153e-05
  mcplx:  5.625844605899370002512314070473795787143904191157633615912000685936644699536348624600153 83E-05
sflintc:  5.625846E-05
dflintc:  5.62584460589937E-05
eflintc:  5.625844605899370002512314070473795787143904191157633615912000685936153e-05
qflintc:  5.625844605899370002512314070473795787143904191157633615912000685936153e-05
oflintc:  5.625844605899370002512314070473795787143904191157633615912000685936644699536348624600153 83E-05
mflintc:  5.625844605899370002512314070473795787143904191157633615912000685936644699536348624600153 83E-05
aflintc: [5.625844605899370002512314070473795787143904191157633615912000685936644699536348624600153 8e-5 +/- 4.01e-94]
```

3.8.5 Hyperbolic cosecant, $\operatorname{csch}(x)$

`ctx.csch(x)`

where `ctx` is `math53`, `mathc53`, `ctxcpp` or `ctxflint`.

Returns the hyperbolic cosecant of x, $\operatorname{csch}(x)$. See also Wikipedia [1233], MathWorld [857], NIST [483], Ehrhardt [295] (4.2.24), Flint [736], Flint [726], Mpmath [559].

The hyperbolic cosecant can be expressed in terms of the exponential function as $\operatorname{csch}(x) = \dfrac{1}{\sinh(x)} = \dfrac{2}{e^x - e^{-x}} = \dfrac{2e^x}{1 - e^{-2x}}$.

The complex hyperbolic cosecant can be expressed in terms of related functions:

$$\operatorname{csch}(z) = \frac{1}{\sinh(z)} = \frac{2}{e^z - e^{-z}} = \frac{2e^z}{1 - e^{-2z}} = i \cdot \operatorname{csc}(iz)$$

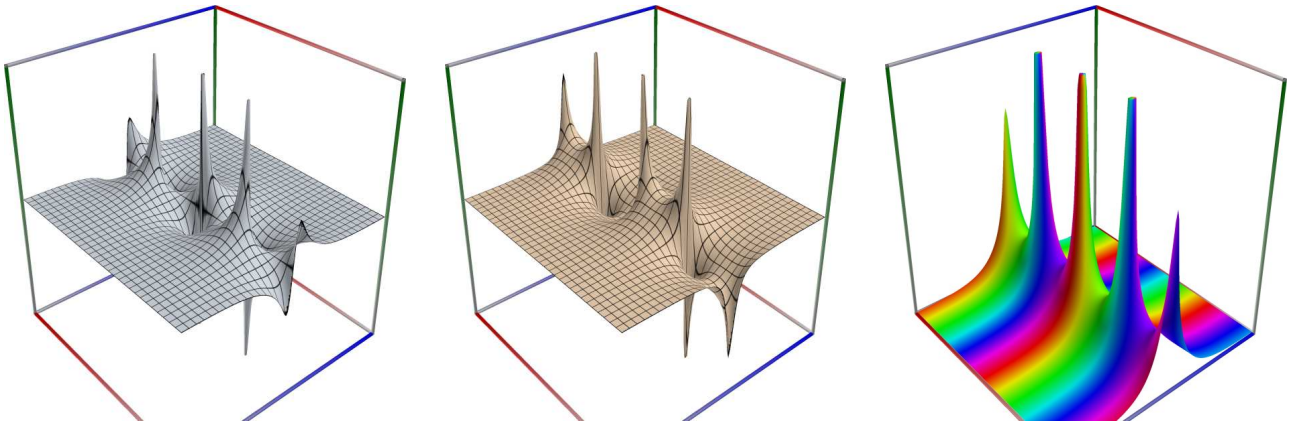

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.csch(x)))
    fpm:  -0.0121939463839044
    mpm:  -0.012193946383904379094476807018328904914684291591384224079548646179033482528140112547289642 5
    dpm:  -0.012193946383904379094476807018328904914684291591384224079548646179033482528140112547289642 5
    ipm: [-0.012193946383904379094476807018328904914684291591384224079548646179033482528140112547289642520826,
```

(continues on next page)

(continued from previous page)

```
          -0.012193946383904379094476807018328904914684291591384224079548646179033482528140112547289642482474]
    gpm:  -0.01219394638390437909447680701832890491468429159138422407954864617903348252814011254728964249 6
    apm: [-0.012193946383904379094476807018328904914684291591384224079548646179033482528140112547289642496425 +/- 2.16e-92]
 math53:  -0.0121939463839044
  sreal:  -0.01219395
  dreal:  -0.0121939463839044
  ereal:  -0.012193946383904379095
  qreal:  -0.0121939463839043790944768070183289
  oreal:  -0.012193946383904379094476807018328904914684291591384224079548646179033482
  mreal:  -0.012193946383904379094476807018328904914684291591384224079548646179033482528140112547289642 5
 sflint:  -0.01219395
 dflint:  -0.0121939463839044
 eflint:  -0.012193946383904379096
 qflint:  -0.0121939463839043790944768070183289
 oflint:  -0.012193946383904379094476807018328904914684291591384224079548646179033483
 mflint:  -0.012193946383904379094476807018328904914684291591384224079548646179033482528140112547289642 5
 aflint: [-0.012193946383904379094476807018328904914684291591384224079548646179033482528140112547289642 5425 +/- 1.98e-92]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.csch(x)))
    fpm:  (0.005073848423309090237460026342247365091907, -0.011087385277729)
    mpm:  (0.005073848423309090237460026342247365091907, -0.011087385277729015086780949288174123579631834864585170980393836072014820812889762600135396418683)
cmath53:  (0.00507384842330909, -0.011087385277729)
  qcplx:  (0.005073848423309090237460026342247365091907, -0.011087385277729015086780949288174123579631834864585170980393836072014820812889762600135396418683)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.csch(x))))
    fpm:  0.00507384842330909
    mpm:  0.005073848423309090237460026342247365091906811322459250607335609708525001292901260861497159 2
    dpm:  0.005073848423309090237460026342247365091906811322459250607335609708525001292901260861497159 23
    ipm: [0.005073848423309090237460026342247365091906811322459250607335609708525001292901260861497159218 468,
          0.005073848423309090237460026342247365091906811322459250607335609708525001292901260861497159235 0465]
    gpm:  0.00507384842330909023746002634224736509190681132245925060733560970852500129290126086149715922 35
    apm: [0.005073848423309090237460026342247365091906811322459250607335609708525001292901260861497159 23 +/- 9.09e-93]
cmath53:  0.00507384842330909
  scplx:  0.005073849
  dcplx:  0.00507384842330909
  ecplx:  0.005073848423309090238 4
  qcplx:  0.00507384842330909023746002634224737
  ocplx:  0.005073848423309090237460026342247365091906811322459250607335609708525001 2
  mcplx:  0.005073848423309090237460026342247365091906811322459250607335609708525001292901260861497159 23
sflintc:  0.005073849
dflintc:  0.00507384842330909
eflintc:  0.005073848423309090238
qflintc:  0.00507384842330909023746002634224737
oflintc:  0.005073848423309090237460026342247365091906811322459250607335609708525001 4
mflintc:  0.005073848423309090237460026342247365091906811322459250607335609708525001292901260861497159 23
aflintc: [0.005073848423309090237460026342247365091906811322459250607335609708525001292901260861497159 2 +/- 4.21e-92]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.csch(x))))
    fpm:  -0.011087385277729
    mpm:  -0.011087385277729015086780949288174123579631834864585170980393836072014820812889762600135396418683
    dpm:  -0.011087385277729015086780949288174123579631834864585170980393836072014820812889762600135396418683
    ipm: [-0.011087385277729015086780949288174123579631834864585170980393836072014820812889762600135396418683,
```

(continues on next page)

(continued from previous page)

```
          -0.011087385277729015086780949288174123579631834864585170980393836072014820812889762600135396382248]
    gpm:  -0.01108738527772901508678094928817412357963183486458517098039383607201482081288976260013539638 2248]
    apm: [-0.01108738527772901508678094928817412357963183486458517098039383607201482081288976260013539638 2248] +/- 1.94e-92]
cmath53:  -0.011087385277729
  scplx:  -0.01108739
  dcplx:  -0.011087385277729
  ecplx:  -0.01108738527772901508 8
  qcplx:  -0.01108738527772901508678094928817 1
  ocplx:  -0.01108738527772901508678094928817412357963183486458517098039383607201482 1
  mcplx:  -0.01108738527772901508678094928817412357963183486458517098039383607201482081288976260013539 4
sflintc:  -0.01108739
dflintc:  -0.011087385277729
eflintc:  -0.01108738527772901508 8
qflintc:  -0.01108738527772901508678094928817 1
oflintc:  -0.01108738527772901508678094928817412357963183486458517098039383607201482 1
mflintc:  -0.01108738527772901508678094928817412357963183486458517098039383607201482081288976260013539 4
aflintc: [-0.01108738527772901508678094928817412357963183486458517098039383607201482081288976260013539 4 +/- 2.98e-92]
```

3.8.6 Hyperbolic secant, $\operatorname{sech}(x)$

`ctx.sech`(x)

where `ctx` is `math53`, `mathc53`, `ctxcpp` or `ctxflint`.

Returns the hyperbolic secant of x, $\operatorname{sech}(x)$. See also Wikipedia [1233], MathWorld [860], NIST [483], Ehrhardt [295] (4.2.54), Mpmath [562].

The hyperbolic secant can be expressed in terms of the exponential function as $\operatorname{sech}(x) = \dfrac{1}{\cosh(x)} = \dfrac{2}{e^x + e^{-x}} = \dfrac{2e^x}{e^{2x}+1}$.

The complex hyperbolic secant can be expressed in terms of related functions:

$$\operatorname{sech}(z) = \frac{1}{\cosh(z)} = \frac{2}{e^z + e^{-z}} = \frac{2e^z}{e^{2z}+1} = \operatorname{sec}(iz)$$

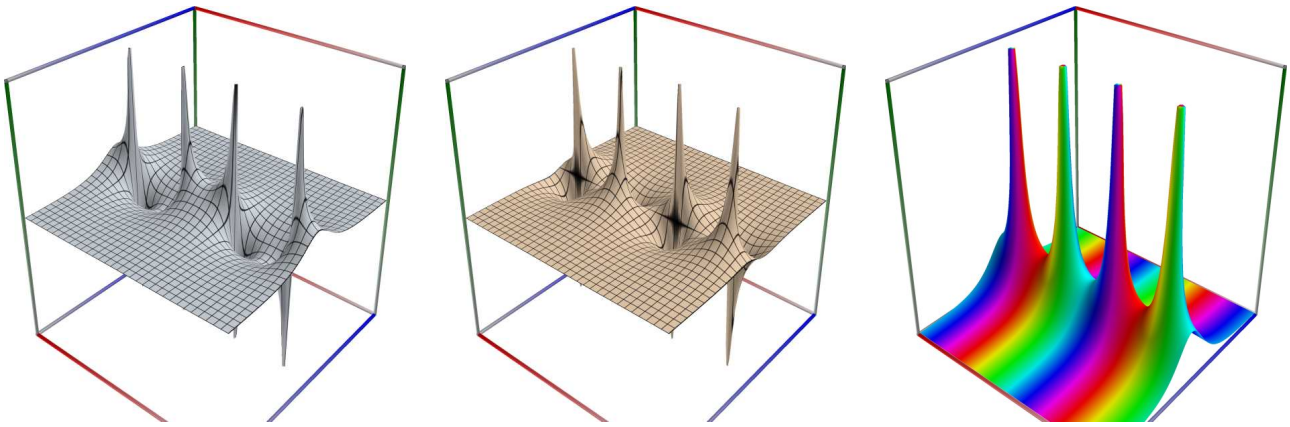

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.sech(x)))
    fpm:  0.012193039911852
    mpm:  0.012193039911852020398488570022999442564275374188449644780096973162048881072551185231 4845853
```

(continues on next page)

(continued from previous page)

```
    dpm:  0.012193039911852020398488570022999442564275374188449644780096973162048881072551185231484585 3
    ipm: [0.012193039911852020398488570022999442564275374188449644780096973162048881072551185231484585260044,
          0.012193039911852020398488570022999442564275374188449644780096973162048881072551185231484585298396]
    gpm:  0.012193039911852020398488570022999442564275374188449644780096973162048881072551185231484585273
    apm: [0.012193039911852020398488570022999442564275374188449644780096973162048881072551185231484585 3 +/- 3.12e-92]
 math53:  0.012193039911852
  sreal:  0.01219304
  dreal:  0.012193039911852
  ereal:  -0.012193946383904379095
  qreal:  0.012193039911852020398488570022999 4
  oreal:  0.012193039911852020398488570022999442564275374188449644780096973162048881
  mreal:  0.012193039911852020398488570022999442564275374188449644780096973162048881072551185231484585 3
 sflint:  0.01219304
 dflint:  0.012193039911852
 eflint:  0.0121930399118520204
 qflint:  0.012193039911852020398488570022999 4
 oflint:  0.012193039911852020398488570022999442564275374188449644780096973162048881
 mflint:  0.012193039911852020398488570022999442564275374188449644780096973162048881072551185231484585 3
 aflint: [0.012193039911852020398488570022999442564275374188449644780096973162048881072551185231484585 3 +/- 3.74e-92]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.sech(x)))
    fpm:  (-0.00507471879083841, 0.0110876385600675)
    mpm:  (-0.005074718790838412755276322709632089649817, 0.011087638560067537703628921020251111385382)
cmath53:  (-0.00507471879083841, 0.0110876385600675)
  qcplx:  (-0.005074718790838412755276322709632 9, 0.011087638560067537703628921020251 511)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.sech(x))))
    fpm:  -0.00507471879083841
    mpm:  -0.005074718790838412755276322709632089649817422295006612433015961805282548919511555977746045 7
    dpm:  -0.005074718790838412755276322709632089649817422295006612433015961805282548919511555977746045 8
    ipm: [-0.005074718790838412755276322709632089649817422295006612433015961805282548919511555977746045 7,
          -0.005074718790838412755276322709632089649817422295006612433015961805282548919511555977746045 2]
    gpm:  -0.005074718790838412755276322709632089649817422295006612433015961805282548919511555977746045 1
    apm: [-0.005074718790838412755276322709632089649817422295006612433015961805282548919511555977746045 7 +/- 2.97e-92]
cmath53:  -0.00507471879083841
  scplx:  -0.00507472
  dcplx:  -0.00507471879083842
  ecplx:  -0.005074718790838412 559
  qcplx:  -0.005074718790838412755276322709632 9
  ocplx:  -0.005074718790838412755276322709632089649817422295006612433015961805282548 8
  mcplx:  -0.005074718790838412755276322709632089649817422295006612433015961805282548919511555977746045 7
sflintc:  -0.005074719
dflintc:  -0.00507471879083841
eflintc:  -0.005074718790838412 555
qflintc:  -0.005074718790838412755276322709632 9
oflintc:  -0.005074718790838412755276322709632089649817422295006612433015961805282 49
mflintc:  -0.005074718790838412755276322709632089649817422295006612433015961805282548919511555977746045 7
aflintc: [-0.005074718790838412755276322709632089649817422295006612433015961805282548919511555977746045 7 +/- 4.64e-92]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.sech(x))))
    fpm:  0.0110876385600675
    mpm:  0.011087638560067537703628921020251113853822103152245485417582815836444456403955445981504670 3
```

(continues on next page)

(continued from previous page)

```
    dpm:  0.011087638560067537703628921020251113853822103152245485417582815836444456403955445981504670 3
    ipm: [0.011087638560067537703628921020251113853822103152245485417582815836444456403955445981504670316958,
          0.011087638560067537703628921020251113853822103152245485417582815836444456403955445981504670351475]
    gpm:  0.011087638560067537703628921020251113853822103152245485417582815836444456403955445981504670328
    apm: [0.011087638560067537703628921020251113853822103152245485417582815836444456403955445981504670 3 +/- 5.68e-92]
cmath53:  0.0110876385600675
  scplx:  0.01108764
  dcplx:  0.0110876385600675
  ecplx:  0.011087638560067537704
  qcplx:  0.011087638560067537703628921020251 1
  ocplx:  0.011087638560067537703628921020251113853822103152245485417582815836444456
  mcplx:  0.011087638560067537703628921020251113853822103152245485417582815836444456403955445981504670 3
sflintc:  0.01108764
dflintc:  0.0110876385600675
eflintc:  0.011087638560067537704
qflintc:  0.011087638560067537703628921020251 1
oflintc:  0.011087638560067537703628921020251113853822103152245485417582815836444457
mflintc:  0.011087638560067537703628921020251113853822103152245485417582815836444456403955445981504670 3
aflintc: [0.011087638560067537703628921020251113853822103152245485417582815836444456403955445981504670 3 +/- 6.26e-92]
```

3.9 Inverse trigonometric functions, in radians

For a general introduction to inverse trigonometric functions, see Wikipedia [1255], NIST [485].

3.9.1 Inverse sine, $\mathrm{asin}(x)$

`ctx.asin(x)`

where `ctx` is `math53`, `mathc53`, `ctxcpp`, `ctxflint`.

Returns the inverse sine of x, $\mathrm{asin}(x)$. See also Wikipedia [1255], MathWorld [867], NIST [485], Ehrhardt [295] (4.2.13), Mpmath [575].

The inverse sine can be expressed in terms of the inverse tangent as $\mathrm{asin}(x) = \mathrm{atan}\left(\frac{x}{\sqrt{1-x^2}}\right)$. The domain is the open interval $(-1, 1)$. We have $\sin(\mathrm{asin}(x)) = x$ for all x, but $\mathrm{asin}(\sin(x)) = x$ only for $-\pi/2 < x < \pi/2$.

The inverse sine can be expressed in terms of related functions (with the principal-branch log and square root):

$$\mathrm{asin}(z) = -i \log\left(iz + \sqrt{1-z^2}\right)$$

The inverse sine has two branch points: $x = \pm 1$.The branch cuts are placed along the line segments $(-\infty, -1)$ and $(+1, +\infty)$. Since $-1 \le \sin(x) \le 1$ for real x, the inverse sine is real-valued only for $-1 \le x \le 1$. On this interval, it is defined to be a monotonically increasing function assuming values between $-\pi/2$ and $\pi/2$.

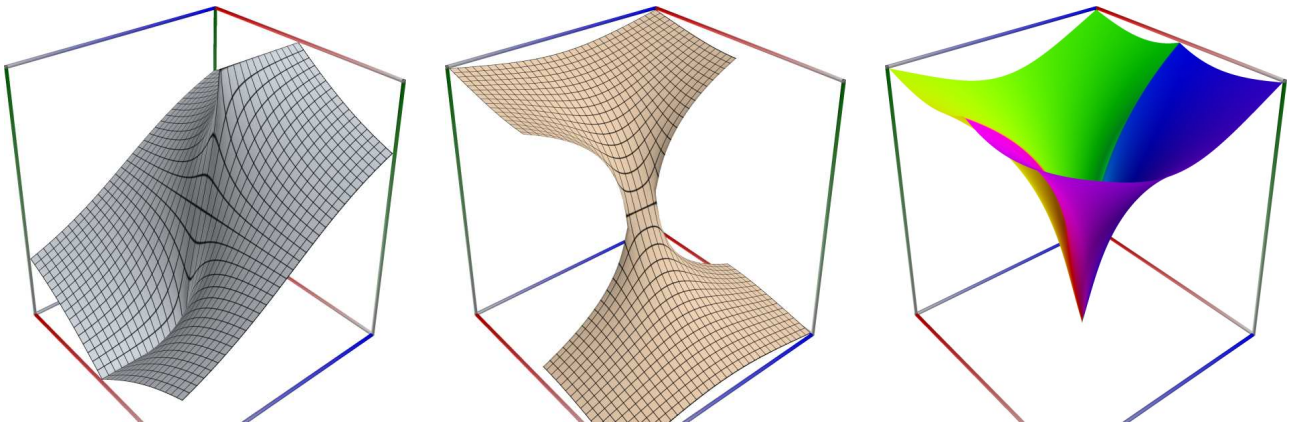

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 0.5; gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.asin(x)))
    fpm:  0.523598775598299
    mpm:  0.523598775598298873077107230546583814032861566562517636829157432051302734381034833104672471
    dpm:  0.523598775598298873077107230546583814032861566562517636829157432051302734381034833104672471
    ipm: [0.523598775598298873077107230546583814032861566562517636829157432051302734381034833104672470767 24,
          0.523598775598298873077107230546583814032861566562517636829157432051302734381034833104672471012 69]
    gpm:  0.523598775598298873077107230546583814032861566562517636829157432051302734381034833104672470889
    apm: [0.523598775598298873077107230546583814032861566562517636829157432051302734381034833104672471 +/- 4.48e-91]
 math53:  0.523598775598299
  sreal:  0.5235988
  dreal:  0.523598775598299
  ereal:  0.52359877559829887307
  qreal:  0.523598775598298873077107230546584
```

(continues on next page)

(continued from previous page)

```
  oreal:  0.523598775598298873077107230546583814032861566562517636829157432051302 73
  mreal:  0.523598775598298873077107230546583814032861566562517636829157432051302 7343810348331046724 71
 sflint:  0.5235988
 dflint:  0.523598775598299
 eflint:  0.52359877559829887307
 qflint:  0.523598775598298873077107230546584
 oflint:  0.523598775598298873077107230546583814032861566562517636829157432051302 73
 mflint:  0.523598775598298873077107230546583814032861566562517636829157432051302 7343810348331046724 71
 aflint: [0.523598775598298873077107230546583814032861566562517636829157432051302 7343810348331046724 7 +/- 1.02e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.asin(x)))
    fpm:  (-1.19130130401227, 2.3877960445782)
    mpm:  (-1.191301304012269668226278697413891854615290690332711513517562903074165069486165884227551 5795759, 2.387796044578202169956121276872047618949508385471 6)
cmath53:  (-1.19130130401227, 2.38779604457821)
  qcplx:  (-1.191301304012269668226278697413 89, 2.387796044578202169956121276872 05)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.asin(x))))
    fpm:  -1.19130130401227
    mpm:  -1.191301304012269668226278697413891854615290690332711513517562903074165069486165884227551 56
    dpm:  -1.191301304012269668226278697413891854615290690332711513517562903074165069486165884227551 56
    ipm: [-1.191301304012269668226278697413891854615290690332711513517562903074165069486165884227551 5795759,
          -1.191301304012269668226278697413891854615290690332711513517562903074165069486165884227551 5476668]
    gpm:  -1.191301304012269668226278697413891854615290690332711513517562903074165069486165884227551 5636
    apm: [-1.191301304012269668226278697413891854615290690332711513517562903074165069486165884227551 6 +/- 6.35e-89]
cmath53:  -1.19130130401227
  scplx:  -1.191301
  dcplx:  -1.19130130401227
  ecplx:  -1.1913013040122696683
  qcplx:  -1.191301304012269668226278697413 89
  ocplx:  -1.191301304012269668226278697413891854615290690332711513517562903074165 1
  mcplx:  -1.191301304012269668226278697413891854615290690332711513517562903074165069486165884227551 56
sflintc:  -1.191301
dflintc:  -1.19130130401227
eflintc:  -1.1913013040122696682
qflintc:  -1.191301304012269668226278697413 89
oflintc:  -1.191301304012269668226278697413891854615290690332711513517562903074165 1
mflintc:  -1.191301304012269668226278697413891854615290690332711513517562903074165069486165884227551 56
aflintc: [-1.191301304012269668226278697413891854615290690332711513517562903074165069486165884227551 6 +/- 8.88e-89]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.asin(x))))
    fpm:  2.3877960445782
    mpm:  2.387796044578202169956121276872047618949508385471562101893453184611527367612615052660948 18
    dpm:  2.387796044578202169956121276872047618949508385471562101893453184611527367612615052660948 18
    ipm: [2.387796044578202169956121276872047618949508385471562101893453184611527367612615052660948 158087,
          2.387796044578202169956121276872047618949508385471562101893453184611527367612615052660948 1963779]
    gpm:  2.387796044578202169956121276872047618949508385471562101893453184611527367612615052660948 1767
    apm: [2.387796044578202169956121276872047618949508385471562101893453184611527367612615052660948 2 +/- 6.84e-89]
cmath53:  2.38779604457821
  scplx:  2.387796
  dcplx:  2.38779604457821
  ecplx:  2.3877960445782021701
  qcplx:  2.387796044578202169956121276872 05
```

(continues on next page)

(continued from previous page)

```
  ocplx:  2.387796044578202169956121276872047618949508385471562101893453184611527367612615052660948 18
  mcplx:  2.387796044578202169956121276872047618949508385471562101893453184611527367612615052660948 18
sflintc:  2.387796
dflintc:  2.3877960445782
eflintc:  2.3877960445782021699
qflintc:  2.387796044578202169956121276872047
oflintc:  2.387796044578202169956121276872047618949508385471562101893453184611527367612615052660948 18
mflintc:  2.387796044578202169956121276872047618949508385471562101893453184611527367612615052660948 18
aflintc: [2.387796044578202169956121276872047618949508385471562101893453184611527367612615052660948 +/- 2.50e-88]
```

3.9.2 Inverse cosine, $\mathrm{acos}(x)$

`ctx.acos(x)`

where `ctx` is `math53`, `mathc53`, `ctxcpp`, `ctxflint`.

Returns the inverse cosine of x, $\mathrm{acos}(x)$. See also Wikipedia [1255], MathWorld [864], NIST [485], Ehrhardt [295] (4.2.3), Flint [739], Flint [729], Mpmath [566].

The inverse cosine can be expressed in terms of the inverse tangent as $\mathrm{acos}(x) = \mathrm{atan}\left(\frac{\sqrt{1-x^2}}{x}\right)$. The domain is the open interval $(-1, 1)$. We have $\cos(\mathrm{acos}(x)) = x$ for all x, but $\mathrm{acos}(\cos(x)) = x$ only for $0 \le x < \pi$.

The inverse cosine can be expressed in terms of related functions (with the principal-branch log and square root):

$$\mathrm{acos}(z) = \frac{\pi}{2} + i \log\left(iz + \sqrt{1-z^2}\right)$$

The inverse cosine has two branch points: $x = \pm 1$.The branch cuts are placed along the line segments $(-\infty, -1)$ and $(+1, +\infty)$.

Since $-1 \le \cos(x) \le 1$ for real x, the inverse cosine is real-valued only for $-1 \le x \le 1$, where it is a monotonically decreasing function assuming values between $+\pi$ and 0.

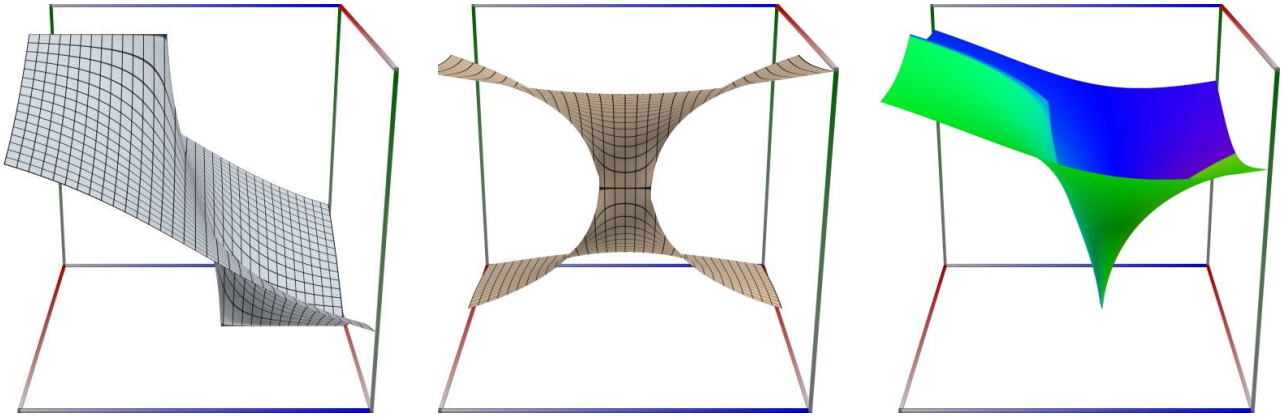

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 0.5; gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.acos(x)))
    fpm:  1.0471975511966
    mpm:  1.047197551196597746154214461093167628065723133125035273658314864102605468762069666209344 94
```

(continues on next page)

(continued from previous page)

```
    dpm:  1.047197551196597746154214461093167628065723133125035273658314864102605468762069666209344 94
    ipm: [1.047197551196597746154214461093167628065723133125035273658314864102605468762069666209344 94493415345,
          1.047197551196597746154214461093167628065723133125035273658314864102605468762069666209344 94493420254]
    gpm:  1.047197551196597746154214461093167628065723133125035273658314864102605468762069666209344 9493418
    apm: [1.047197551196597746154214461093167628065723133125035273658314864102605468762069666209344 94 +/- 2.37e-90]
 math53:  1.0471975511966
  sreal:  1.047198
  dreal:  1.0471975511966
  ereal:  1.0471975511965977461
  qreal:  1.0471975511965977461542144610931 7
  oreal:  1.0471975511965977461542144610931676280657231331250352736583148641026055
  mreal:  1.047197551196597746154214461093167628065723133125035273658314864102605468762069666209344 94
 sflint:  1.047198
 dflint:  1.0471975511966
 eflint:  1.0471975511965977461
 qflint:  1.0471975511965977461542144610931 7
 oflint:  1.0471975511965977461542144610931676280657231331250352736583148641026055
 mflint:  1.047197551196597746154214461093167628065723133125035273658314864102605468762069666209344 94
 aflint: [1.047197551196597746154214461093167628065723133125035273658314864102605468762069666209344 94 +/- 3.63e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.acos(x)))
    fpm:  (2.76209763080717, -2.3877960445782)
    mpm:  (2.76209763080716628745760038905364329671387539002032, -2.3877960445782021699561212768720476189495083854716)
cmath53:  (2.76209763080717, -2.3877960445782)
  qcplx:  (2.76209763080716628745760038905364, -2.3877960445782021699561212768720 5)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.acos(x))))
    fpm:  2.76209763080717
    mpm:  2.76209763080716628745760038905364329671387539002026442400503519922807327262927038354156898
    dpm:  2.76209763080716628745760038905364329671387539002026442400503519922807327262927038354156898
    ipm: [2.76209763080716628745760038905364329671387539002026442400503519922807327262927038354156896033 7,
          2.76209763080716628745760038905364329671387539002026442400503519922807327262927038354156899224 58]
    gpm:  2.76209763080716628745760038905364329671387539002026442400503519922807327262927038354156897 5
    apm: [2.76209763080716628745760038905364329671387539002026442400503519922807327262927038354156 90 +/- 5.09e-89]
cmath53:  2.76209763080717
  scplx:  2.762098
  dcplx:  2.76209763080717
  ecplx:  2.7620976308071662876
  qcplx:  2.76209763080716628745760038905364
  ocplx:  2.76209763080716628748268317711698495683166202542191820907420352807 1651
  mcplx:  2.76209763080716628745760038905364329671387539002026442400503519922807327262927038354156898
sflintc:  2.762098
dflintc:  2.76209763080717
eflintc:  2.7620976308071662874
qflintc:  2.76209763080716628745760038905364
oflintc:  2.762097630807166287457600389053643296713875390020264424005035199228073 733
mflintc:  2.76209763080716628745760038905364329671387539002026442400503519922807327262927038354156898
aflintc: [2.76209763080716628745760038905364329671387539002026442400503519922807327262927038354156 90 +/- 7.98e-89]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.acos(x))))
    fpm:  -2.3877960445782
    mpm:  -2.387796044578202169956121276872047618949508385471562101893453184611527367612615052660948 18
```

(continues on next page)

(continued from previous page)

```
    dpm:  -2.3877960445782021699561212768720476189495083854715621018934531846115273676126150526609481 8
    ipm: [-2.3877960445782021699561212768720476189495083854715621018934531846115273676126150526609481963779,
          -2.3877960445782021699561212768720476189495083854715621018934531846115273676126150526609481580 87]
    gpm:  -2.3877960445782021699561212768720476189495083854715621018934531846115273676126150526609481767
    apm: [-2.3877960445782021699561212768720476189495083854715621018934531846115273676126150526609482 +/- 6.84e-89]
cmath53:  -2.3877960445782
  scplx:  -2.387796
  dcplx:  -2.3877960445782
  ecplx:  -2.3877960445782021701
  qcplx:  -2.387796044578202169956121276872047
  ocplx:  -2.3877960445782021699561212768720476189495083854715621018934531846115271
  mcplx:  -2.3877960445782021699561212768720476189495083854715621018934531846115273676126150526609481 8
sflintc:  -2.387796
dflintc:  -2.3877960445782
eflintc:  -2.3877960445782021699
qflintc:  -2.387796044578202169956121276872047
oflintc:  -2.3877960445782021699561212768720476189495083854715621018934531846115274
mflintc:  -2.3877960445782021699561212768720476189495083854715621018934531846115273676126150526609481 8
aflintc: [-2.3877960445782021699561212768720476189495083854715621018934531846115273676126150526609 48 +/- 2.50e-88]
```

3.9.3 Inverse tangent, $\operatorname{atan}(x)$

`ctx.atan`(x)

where `ctx` is `math53`, `mathc53`, `ctxcpp` or `ctxflint`.

Returns the inverse tangent of x, $\operatorname{atan}(x)$. See also Wikipedia [1255], MathWorld [868], NIST [485], Ehrhardt [295] (4.2.15), Flint [739], Flint [729], Mpmath [576].

The inverse tangent can be defined as $\operatorname{atan}(x) = \displaystyle\int_0^x \frac{1}{t^2+1}\mathrm{d}t$. This is a real-valued function for all real x, with range $(-\pi/2, \pi/2)$. We have $\tan(\operatorname{atan}(x)) = x$ for all x, but $\operatorname{atan}(\tan(x)) = x$ only for $-\pi/2 < x < \pi/2$.

The inverse tangent can be expressed in terms of related functions (with the principal-branch log and square root):

$$\operatorname{atan}(z) = \frac{i}{2}\left(\log(1-iz) - \log(1+iz)\right)$$

The inverse tangent has two branch points: $x = \pm i$.The branch cuts are placed along the line segments $(-i\infty, -i)$ and $(+i, +i\infty)$.

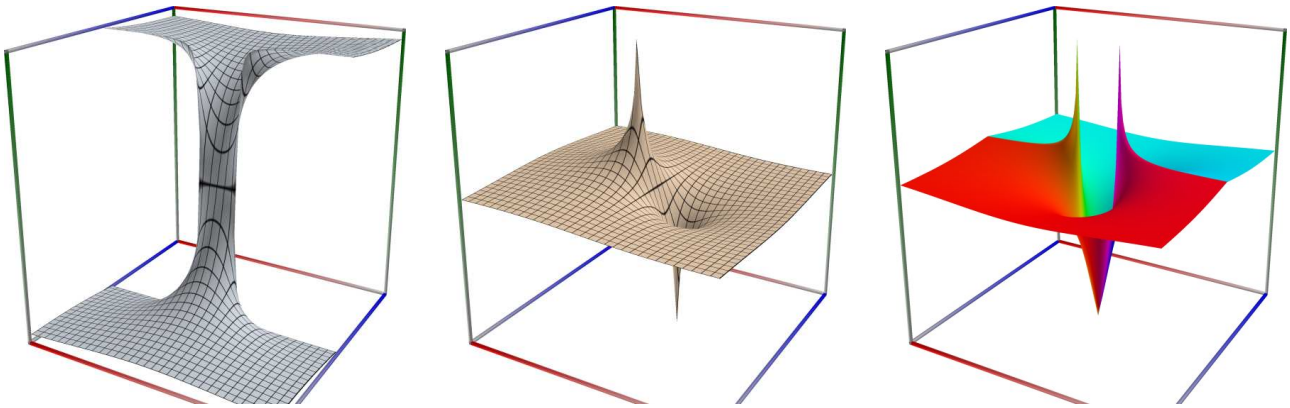

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.atan(x)))
    fpm:  -1.37717433393895
    mpm:  -1.377174333938951237114529917357234396319995704271664949865107859410350681101780312045640 14
    dpm:  -1.377174333938951237114529917357234396319995704271664949865107859410350681101780312045640 14
    ipm: [-1.377174333938951237114529917357234396319995704271664949865107859410350681101780312045640 1413474,
          -1.377174333938951237114529917357234396319995704271664949865107859410350681101780312045640 1411019]
    gpm:  -1.377174333938951237114529917357234396319995704271664949865107859410350681101780312045640 1413
    apm: [-1.377174333938951237114529917357234396319995704271664949865107859410350681101780312045640 14 +/- 1.39e-90]
 math53:  -1.37717433393895
  sreal:  -1.377174
  dreal:  -1.37717433393895
  ereal:  -1.3771743339389512372
  qreal:  -1.377174333938951237114529917357 23
  oreal:  -1.377174333938951237114529917357234396319995704271664949865107859410350 7
  mreal:  -1.377174333938951237114529917357234396319995704271664949865107859410350681101780312045640 14
 sflint:  -1.377174
 dflint:  -1.37717433393895
 eflint:  -1.3771743339389512372
 qflint:  -1.377174333938951237114529917357 23
 oflint:  -1.377174333938951237114529917357234396319995704271664949865107859410350 7
 mflint:  -1.377174333938951237114529917357234396319995704271664949865107859410350681101780312045640 14
 aflint: [-1.377174333938951237114529917357234396319995704271664949865107859410350681101780312045640 14 +/- 1.38e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.atan(x)))
    fpm:  (-1.40174528959347, 0.0648566417905125)
    mpm:  (-1.4017452895934665144846819019147736665947537418285, 0.0648566417905125255447265447518085814 0223527545368)
cmath53:  (-1.40174528959347, 0.0648566417905124)
  qcplx:  (-1.4017452895934665144846819019147 7, 0.0648566417905125255447265447518086)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.atan(x))))
    fpm:  -1.40174528959347
    mpm:  -1.401745289593466514484681901914773666594753741828543935502570914981504924416982323693706 92
    dpm:  -1.401745289593466514484681901914773666594753741828543935502570914981504924416982323693706 92
    ipm: [-1.401745289593466514484681901914773666594753741828543935502570914981504924416982323693706 9231902,
          -1.401745289593466514484681901914773666594753741828543935502570914981504924416982323693706 9226993]
    gpm:  -1.401745289593466514484681901914773666594753741828543935502570914981504924416982323693706 9229
    apm: [-1.401745289593466514484681901914773666594753741828543935502570914981504924416982323693706 92 +/- 3.56e-90]
cmath53:  -1.40174528959347
  scplx:  -1.401745
  dcplx:  -1.40174528959347
  ecplx:  -1.4017452895934665144
  qcplx:  -1.401745289593466514484681901914 7
  ocplx:  -1.401745289593466514484681901914773666594753741828543935502570914981504 9
  mcplx:  -1.401745289593466514484681901914773666594753741828543935502570914981504924416982323693706 92
sflintc:  -1.401745
dflintc:  -1.40174528959347
eflintc:  -1.4017452895934665145
qflintc:  -1.401745289593466514484681901914 7
oflintc:  -1.401745289593466514484681901914773666594753741828543935502570914981504 9
mflintc:  -1.401745289593466514484681901914773666594753741828543935502570914981504924416982323693706 92
aflintc: [-1.401745289593466514484681901914773666594753741828543935502570914981504924416982323693706 92 +/- 4.54e-90]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.atan(x))))
    fpm:  0.0648566417905125
    mpm:  0.064856641790512525544726544751808581402235275453679717076641976617561932195330553698351347840685,
          0.064856641790512525544726544751808581402235275453679717076641976617561932195330553698351347808614]
    gpm:  0.0648566417905125255447265447518085814022352754536797170766419766175619321953305536983513479 48
    apm: [0.0648566417905125255447265447518085814022352754536797170766419766175619321953305536983513479 +/- 7.17e-91]
cmath53:  0.0648566417905124
  scplx:  0.06485665
  dcplx:  0.0648566417905124
  ecplx:  0.06485664179051252553 3
  qcplx:  0.0648566417905125255447265447518086
  ocplx:  0.064856641790512525544726544751808581402235275453679717076641976617561931
  mcplx:  0.0648566417905125255447265447518085814022352754536797170766419766175619321953305536983513479
sflintc:  0.06485664
dflintc:  0.0648566417905125
eflintc:  0.06485664179051252554
qflintc:  0.0648566417905125255447265447518086
oflintc:  0.064856641790512525544726544751808581402235275453679717076641976617561933
mflintc:  0.0648566417905125255447265447518085814022352754536797170766419766175619321953305536983513479
aflintc: [0.064856641790512525544726544751808581402235275453679717076641976617561932195330553698351347 +/- 5.09e-90]
```

3.9.4 Inverse tangent, 2 arguments, $\operatorname{atan2}(y, x)$

`ctx.atan2`(y, x)

where `ctx` is `math53`, `mathc53`, `ctxcpp` or `ctxflint`.

Returns the inverse tangent of x and y. See also Wikipedia [1268], MathWorld [868], Flint [739], Flint [729], Mpmath [613].

Computes the two-argument arctangent, $\operatorname{atan2}(y, x)$, giving the signed angle between the positive x-axis and the point (x, y) in the 2D plane. This function is defined for real x and y only.

The two-argument arctangent essentially computes $\operatorname{atan}(y/x)$, but accounts for the signs of both x and y to give the angle for the correct quadrant.

An example with real input:

```
>>> from xlcalcnet import *
>>> y = 5.1; x = 2.7; gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.atan2(y, x)))
    fpm:  1.08389709498363
    mpm:  1.0838970949836275315395370948364541005005021040522174433433498663274486531297748220290897123973,
          1.0838970949836275315395370948364541005005021040522174433433498663274486531297748220290897126428]
    dpm:  1.083897094983627587550788787637146669079442743664868900036634806786006303557488813482721852
    ipm: [1.0838970949836275315395370948364541005005021040522174433433498663274486531297748220290897123973,
          1.0838970949836275315395370948364541005005021040522174433433498663274486531297748220290897126428]
    gpm:  1.0838970949836275315395370948364541005005021040522174433433498663274486531297748220290897126
    apm: [1.083897094983627587550788787637146669079442743664868900036634806786006303557488813482721852 +/- 2.75e-90]
 math53:  1.08389709498363
  sreal:  1.083897
  dreal:  1.08389709498363
  ereal:  1.0838970949836275875
  qreal:  1.083897094983627587550788787637 15
  oreal:  1.0838970949836275875507887876371466690794427436648689000366348067860063
  mreal:  1.083897094983627587550788787637146669079442743664868900036634806786006303557488813482721852
 sflint:  1.083897
 dflint:  1.08389709498363
 eflint:  1.0838970949836275875
 qflint:  1.083897094983627587550788787637 15
 oflint:  1.0838970949836275875507887876371466690794427436648689000366348067860063
 mflint:  1.083897094983627587550788787637146669079442743664868900036634806786006303557488813482721852
 aflint: [1.083897094983627587550788787637146669079442743664868900036634806786006303557488813482721852 +/- 3.12e-90]
```

3.9.5 Inverse cotangent, $\operatorname{acot}(x)$

`ctx.acot(`x`)`

Returns the inverse cotangent of x, $\operatorname{acot}(x)$. See also Wikipedia [1255], MathWorld [865], NIST [485], Ehrhardt [295] (4.2.5).

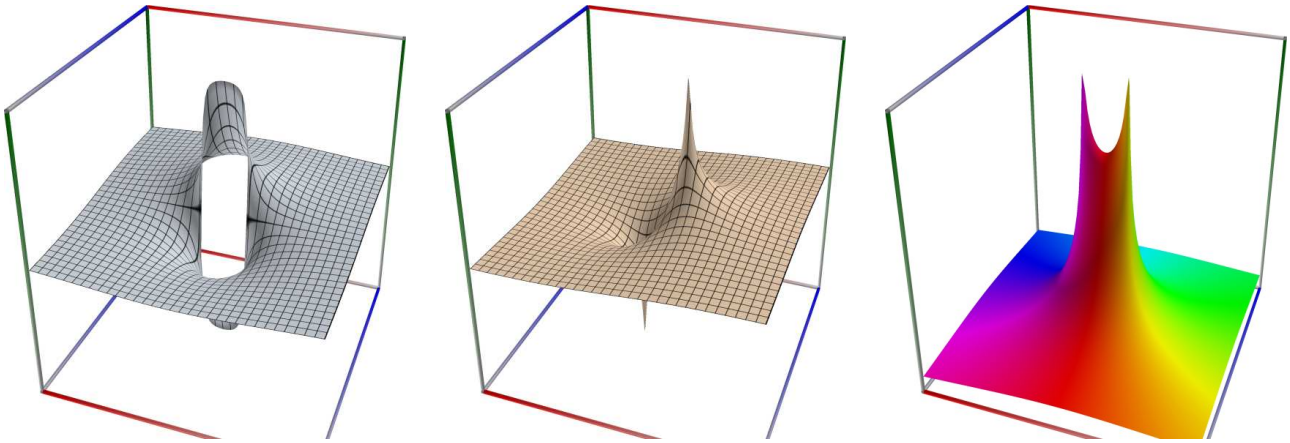

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

The inverse cotangent can be expressed in terms of the inverse tangent as $\operatorname{acot}(x) = \operatorname{atan}\left(\frac{1}{x}\right)$. This is a real-valued function for all real x, with range $(0, \pi)$.

The inverse cotangent can be expressed in terms of related functions (with the principal-branch log and square root):

$$\operatorname{acot}(z) = \frac{i}{2}\left[\log\left(1 - \frac{i}{z}\right) - \log\left(1 + \frac{i}{z}\right)\right] = \operatorname{atan}\left(\frac{1}{z}\right)$$

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> or ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.acot(x)))
    fpm:  -0.193621992855945
    mpm:  -0.193621992855945382116791774282517045778588995415887960622364436743557522041324187268377271
    dpm:  -0.193621992855945382116791774282517045778588995415887960622364436743557522041324187268377271
    ipm: [-0.193621992855945382116791774282517045778588995415887960622364436743557522041324187268377727144526,
          -0.193621992855945382116791774282517045778588995415887960622364436743557522041324187268377727132253]
    gpm:  -0.193621992855945382116791774282517045778588995415887960622364436743557522041324187268377727135
    apm: [-0.193621992855945382116791774282517045778588995415887960622364436743557522041324187268377271 +/- 4.81e-91]
 math53:  -0.193621992855945
  sreal:  -0.193622
  dreal:  -0.193621992855945
  ereal:  -0.19362199285594538211
  qreal:  -0.193621992855945382116791774282517
  oreal:  -0.193621992855945382116791774282517045778588995415887960622364436743557752
  mreal:  -0.193621992855945382116791774282517045778588995415887960622364436743557522041324187268377271
 sflint:  -0.193622
 dflint:  -0.193621992855945
 eflint:  -0.19362199285594538211
 qflint:  -0.193621992855945382116791774282517
 oflint:  -0.193621992855945382116791774282517045778588995415887960622364436743557752
 mflint:  -0.193621992855945382116791774282517045778588995415887960622364436743557522041324187268377271
 aflint: [-0.193621992855945382116791774282517045778588995415887960622364436743557522041324187268377271 +/- 4.71e-91]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.acot(x)))
    fpm:  (-0.16905103720143, -0.0648566417905125)
    mpm:  (-0.16905103720143014104746639789724977775503830957859008974984901381172403278726122175620310
↪0648566417905125255447265447518085814022352754536797170766419766175619321953305536983513479)
cmath53:  (-0.16905103720143, -0.0648566417905126)
  qcplx:  (-0.16905103720143014104746639789724978, -0.06485664179051252554472654475180858140223527545368)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.acot(x))))
    fpm:  -0.16905103720143
    mpm:  -0.16905103720143014104746639789724977775503830957859008974984901381172403278726122175620310490
    dpm:  -0.16905103720143014104746639789724977775503830957859008974984901381172403278726122175620310490
    ipm: [-0.16905103720143014104746639789724977775503830957859008974984901381172403278726122175620310489
          -0.16905103720143014104746639789724977775503830957859008974984901381172403278726122175620310489
    gpm:  -0.16905103720143014104746639789724977775503830957859008974984901381172403278726122175620310489
    apm: [-0.16905103720143014104746639789724977775503830957859008974984901381172403278726122175620310490
cmath53:  -0.16905103720143
  scplx:  -0.169051
  dcplx:  -0.16905103720143
  ecplx:  -0.16905103720143010475
  qcplx:  -0.16905103720143014104746639789724978
  ocplx:  -0.16905103720143014104746639789724977775503830957859008974984901381172403278726122175620310
  mcplx:  -0.16905103720143014104746639789724977775503830957859008974984901381172403278726122175620310
sflintc:  -0.169051
dflintc:  -0.16905103720143
eflintc:  -0.16905103720143010475
qflintc:  -0.16905103720143014104746639789724978
oflintc:  -0.16905103720143014104746639789724977775503830957859008974984901381172403278726122175620310
mflintc:  -0.16905103720143014104746639789724977775503830957859008974984901381172403278726122175620310
aflintc: [-0.16905103720143014104746639789724977775503830957859008974984901381172403278726122175620310
8.22e-90]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.acot(x))))
    fpm:  -0.0648566417905125
    mpm:  -0.06485664179051252554472654475180858140223527545367971707664197661756193219533055369835134790
    dpm:  -0.06485664179051252554472654475180858140223527545367971707664197661756193219533055369835134790
    ipm: [-0.06485664179051252554472654475180858140223527545367971707664197661756193219533055369835134800
          -0.06485664179051252554472654475180858140223527545367971707664197661756193219533055369835134779
    gpm:  -0.06485664179051252554472654475180858140223527545367971707664197661756193219533055369835134790
    apm: [-0.06485664179051252554472654475180858140223527545367971707664197661756193219533055369835134790
cmath53:  -0.0648566417905126
  scplx:  -0.06485662
  dcplx:  -0.0648566417905125
  ecplx:  -0.06485664179051252556
  qcplx:  -0.06485664179051252554472654475180860
  ocplx:  -0.06485664179051252554472654475180858140223527545367971707664197661756193900
  mcplx:  -0.06485664179051252554472654475180858140223527545367971707664197661756193219533055369835134790
sflintc:  -0.06485664
dflintc:  -0.0648566417905125
eflintc:  -0.06485664179051252554700
qflintc:  -0.06485664179051252554472654475180860
oflintc:  -0.06485664179051252554472654475180858140223527545367971707664197661756193900
mflintc:  -0.06485664179051252554472654475180858140223527545367971707664197661756193219533055369835134790
aflintc: [-0.06485664179051252554472654475180858140223527545367971707664197661756193219533055369835134800
```

3.9.6 Inverse cosecant, $\operatorname{acsc}(x)$

`ctx.acsc(x)`

where `ctx` is `math53`, `mathc53`, `ctxcpp` or `ctxflint`.

Returns the inverse cosecant of x, $\operatorname{acsc}(x)$. See also Wikipedia [1255], MathWorld [863], NIST [485], Ehrhardt [295] (4.2.9), Mpmath [565].

The inverse cosecant can be expressed in terms of the inverse sine as $\operatorname{acsc}(x) = \operatorname{asin}\left(\frac{1}{x}\right)$. The domain is $\mathbb{R} \setminus (-1, 1)$, i.e. $|x| > 0$.

The inverse cosecant can be expressed in terms of related functions (with the principal-branch log and square root):

$$\operatorname{acsc}(z) = -i \log\left(\sqrt{1 - \frac{1}{z^2}} + \frac{i}{z}\right) = \operatorname{asin}\left(\frac{1}{z}\right)$$

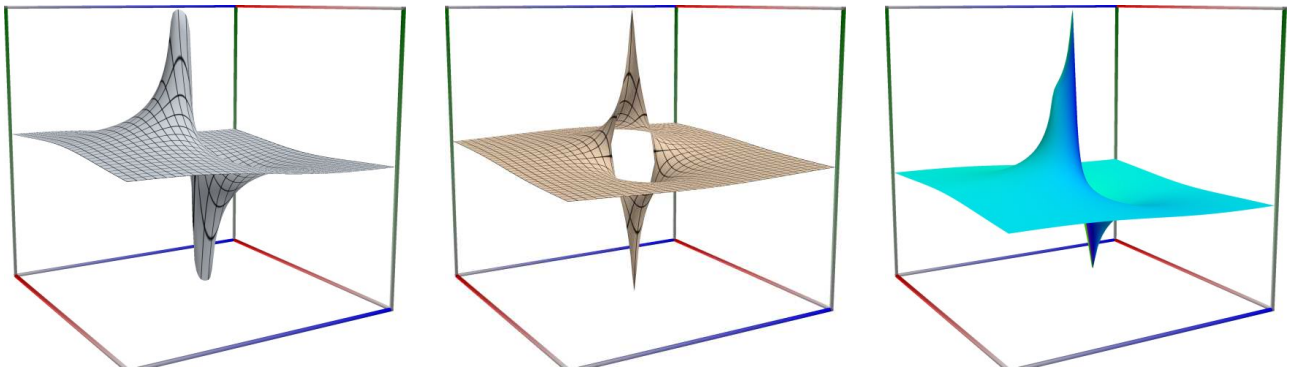

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in ctxlistreal: print(ctx.fmtname + ': ' + ctx.fmt(ctx.sin(x)))
    fpm:  -0.197357109550372
    mpm:  -0.19735710955037206589378968696214188414147380855782483949273296628037748930443068165231364555354,
          -0.19735710955037206589378968696214188414147380855782483949273296628037748930443068165231364540013]
    gpm:  -0.19735710955037206589378968696214188414147380855782483949273296628037748930443068165231364546
    apm: [-0.19735710955037206589378968696214188414147380855782483949273296628037748930443068165231364546 +/- 6.51e-91]
 math53:  -0.197357109550372
  sreal:  -0.1973571
  dreal:  -0.197357109550372
  ereal:  -0.19735710955037206589
  qreal:  -0.19735710955037206589378968696214
  oreal:  -0.19735710955037206589378968696214188414147380855782483949273296628037749
  mreal:  -0.19735710955037206589378968696214188414147380855782483949273296628037748930443068165231364546
 sflint:  -0.1973571
 dflint:  -0.197357109550372
 eflint:  -0.19735710955037206589
 qflint:  -0.19735710955037206589378968696214
 oflint:  -0.19735710955037206589378968696214188414147380855782483949273296628037749
 mflint:  -0.19735710955037206589378968696214188414147380855782483949273296628037748930443068165231364546
 aflint: [-0.19735710955037206589378968696214188414147380855782483949273296628037748930443068165231364546 +/- 7.56e-91]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.acsc(x)))
    fpm:  (-0.170379238366547, -0.067572171292378)
    mpm:  (-0.17037923836654687019105383528103117410866341554603, -0.
↪0675721712923779612897039809269877058750745922211 43)
cmath53:  (-0.170379238366547, -0.067572171292378)
  qcplx:  (-0.17037923836654687019105383528103 1, -0.0675721712923779612897039809269877)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.acsc(x))))
    fpm:  -0.170379238366547
    mpm:  -0.17037923836654687019105383528103117410866341554603306711747708788096507642563500519151 8965
    dpm:  -0.17037923836654687019105383528103117410866341554603306711747708788096507642563500519151 8965
    ipm: [-0.17037923836654687019105383528103117410866341554603306711747708788096507642563500519151 896477641,
          -0.17037923836654687019105383528103117410866341554603306711747708788096507642563500519151 896453096]
    gpm:  -0.17037923836654687019105383528103117410866341554603306711747708788096507642563500519151 896465
    apm: [-0.17037923836654687019105383528103117410866341554603306711747708788096507642563500519151 8965 +/- 6.19e-91]
cmath53:  -0.170379238366547
  scplx:  -0.1703792
  dcplx:  -0.170379238366547
  ecplx:  -0.1703792383665468702
  qcplx:  -0.17037923836654687019105383528103 1
  ocplx:  -0.17037923836654687019105383528103117410866341554603306711747708788096508
  mcplx:  -0.17037923836654687019105383528103117410866341554603306711747708788096507642563500519151 8965
sflintc:  -0.1703792
dflintc:  -0.170379238366547
eflintc:  -0.1703792383665468702
qflintc:  -0.17037923836654687019105383528103 1
oflintc:  -0.17037923836654687019105383528103117410866341554603306711747708788096508
mflintc:  -0.17037923836654687019105383528103117410866341554603306711747708788096507642563500519151 8965
aflintc: [-0.17037923836654687019105383528103117410866341554603306711747708788096507642563500519151 896 +/- 5.49e-90]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.acsc(x))))
    fpm:  -0.067572171292378
    mpm:  -0.06757217129237796128970398092698770587507459222114297856856072784283595435789902428709856 57
    dpm:  -0.06757217129237796128970398092698770587507459222114297856856072784283595435789902428709856 57
    ipm: [-0.06757217129237796128970398092698770587507459222114297856856072784283595435789902428709856 5986466,
          -0.06757217129237796128970398092698770587507459222114297856856072784283595435789902428709856 5495556]
    gpm:  -0.06757217129237796128970398092698770587507459222114297856856072784283595435789902428709856 568
    apm: [-0.06757217129237796128970398092698770587507459222114297856856072784283595435789902428709857 +/- 5.03e-90]
cmath53:  -0.067572171292378
  scplx:  -0.06757224
  dcplx:  -0.0675721712923778
  ecplx:  -0.06757217129237796 204
  qcplx:  -0.06757217129237796128970398092698 7
  ocplx:  -0.06757217129237796128970398092698770587507459222114297856856072784283594 949
  mcplx:  -0.06757217129237796128970398092698770587507459222114297856856072784283595435789902428709856 5
sflintc:  -0.06757218
dflintc:  -0.067572171292378
eflintc:  -0.06757217129237796 292
qflintc:  -0.06757217129237796128970398092698 7
oflintc:  -0.06757217129237796128970398092698770587507459222114297856856072784283595 955
mflintc:  -0.06757217129237796128970398092698770587507459222114297856856072784283595435789902428709856 5
aflintc: [-0.06757217129237796128970398092698770587507459222114297856856072784283595435789902428709856 +/- 6.92e-90]
```

3.9.7 Inverse secant, $\operatorname{asec}(x)$

`ctx.asec(x)`

where `ctx` is `math53`, `mathc53`, `ctxcpp` or `ctxflint`.

Returns the inverse secant of x, $\operatorname{asec}(x)$. See also Wikipedia [1255], MathWorld [866], NIST [485], Ehrhardt [295] (4.2.11), Mpmath [574].

The inverse secant can be expressed in terms of the inverse cosine as $\operatorname{asec}(x) = \operatorname{acos}\left(\frac{1}{x}\right)$. The domain is $\mathbb{R} \setminus (-1, 1)$, i.e. $|x| > 0$.

The inverse secant can be expressed in terms of related functions (with the principal-branch log and square root):

$$\operatorname{asec}(z) = -i \log\left(\sqrt{\frac{1}{z^2} - 1} + \frac{1}{z}\right) = \operatorname{acos}\left(\frac{1}{z}\right)$$

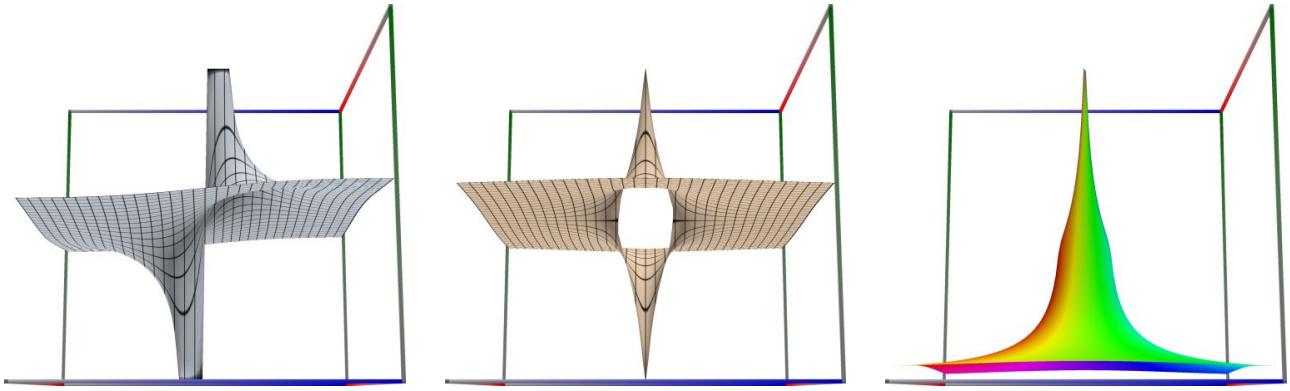

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.asec(x)))
    fpm:  1.76815343634527
    mpm:  1.76815343634526868512511137860189332624005850824537774998020526243428569244753518096633106
    dpm:  1.76815343634526868512511137860189332624005850824537774998020526243428569244753518096633106
    ipm: [1.76815343634526868512511137860189332624005850824537774998020526243428569244753518096633310580393,
          1.76815343634526868512511137860189332624005850824537774998020526243428569244753518096633310582848]
    gpm:  1.76815343634526868512511137860189332624005850824537774998020526243428569244753518096633310582848]
    apm: [1.76815343634526868512511137860189332624005850824537774998020526243428569244753518096633106 +/- 2.52e-90]
 math53:  1.76815343634527
  sreal:  1.768153
  dreal:  1.76815343634527
  ereal:  1.7681534363452686852
  qreal:  1.768153436345268685125111378601893326240058508245377749980205262434285692447535180966331058
  oreal:  1.768153436345268685125111378601893326240058508245377749980205262434285692447535180966331058
  mreal:  1.768153436345268685125111378601893326240058508245377749980205262434285692447535180966331058
 sflint:  1.768153
 dflint:  1.76815343634527
 eflint:  1.7681534363452686852
 qflint:  1.768153436345268685125111378601893326240058508245377749980205262434285692447535180966331058
 oflint:  1.768153436345268685125111378601893326240058508245377749980205262434285692447535180966331058
 mflint:  1.768153436345268685125111378601893326240058508245377749980205262434285692447535180966331058
 aflint: [1.768153436345268685125111378601893326240058508245377749980205262434285692447535180966331106 +/- 5.30e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.asec(x)))
    fpm:  (1.74117556516144, 0.067572171292378)
    mpm:  (1.7411755651614434894223755269207826162072481152336, 0.067572171292377961289703980926987705875074592221143)
cmath53:  (1.74117556516144, 0.067572171292378)
  qcplx:  (1.7411755651614434894223755269207 8, 0.067572171292377961289703980926987 7)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.asec(x))))
    fpm:  1.74117556516144
    mpm:  1.741175565161443489422375526920782616207248115233585977604949384034873279568739504505536 8
    dpm:  1.741175565161443489422375526920782616207248115233585977604949384034873279568739504505536 8
    ipm: [1.741175565161443489422375526920782616207248115233585977604949384034873279568739504505536 770474,
          1.741175565161443489422375526920782616207248115233585977604949384034873279568739504505536 775384]
    gpm:  1.74117556516144348942237552692078261620724811523358597760494938403487327956873950450553637 3
    apm: [1.741175565161443489422375526920782616207248115233585977604949384034873279568739504505536 8 +/- 3.35e-90]
cmath53:  1.74117556516144
  scplx:  1.741176
  dcplx:  1.74117556516144
  ecplx:  1.7411755651614434895
  qcplx:  1.74117556516144348942237552692078
  ocplx:  1.741175565161443489447458314984124276325034750635239762674117712880965 1
  mcplx:  1.741175565161443489422375526920782616207248115233585977604949384034873279568739504505536 8
sflintc:  1.741176
dflintc:  1.74117556516144
eflintc:  1.7411755651614434894
qflintc:  1.74117556516144348942237552692078
oflintc:  1.7411755651614434894223755269207826162072481152335859776049493840348733
mflintc:  1.741175565161443489422375526920782616207248115233585977604949384034873279568739504505536 8
aflintc: [1.741175565161443489422375526920782616207248115233585977604949384034873279568739504505536 8 +/- 5.53e-90]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.asec(x))))
    fpm:  0.067572171292378
    mpm:  0.067572171292377961289703980926987705875074592221142978568560727842835954357899024287098565 7
    dpm:  0.067572171292377961289703980926987705875074592221142978568560727842835954357899024287098565 7
    ipm: [0.067572171292377961289703980926987705875074592221142978568560727842835954357899024287098565 495556,
          0.067572171292377961289703980926987705875074592221142978568560727842835954357899024287098565 986466]
    gpm:  0.067572171292377961289703980926987705875074592221142978568560727842835954357899024287098565 68
    apm: [0.067572171292377961289703980926987705875074592221142978568560727842835954357899024287098565 7 +/- 5.03e-90]
cmath53:  0.067572171292378
  scplx:  0.06757224
  dcplx:  0.0675721712923782
  ecplx:  0.067572171292377961204
  qcplx:  0.067572171292377961289703980926987 7
  ocplx:  0.067572171292377961289703980926987705875074592221142978568560727842835949 1
  mcplx:  0.067572171292377961289703980926987705875074592221142978568560727842835954357899024287098565 1
sflintc:  0.06757218
dflintc:  0.067572171292378
eflintc:  0.067572171292377961292
qflintc:  0.067572171292377961289703980926987 7
oflintc:  0.067572171292377961289703980926987705875074592221142978568560727842835955 1
mflintc:  0.067572171292377961289703980926987705875074592221142978568560727842835954357899024287098565 1
aflintc: [0.067572171292377961289703980926987705875074592221142978568560727842835954357899024287098565 6 +/- 6.92e-90]
```

3.10 Inverse hyperbolic functions

For a general introduction to inverse hyperbolic functions, see Wikipedia [1256], NIST [484].

3.10.1 Inverse hyperbolic sine, $\operatorname{asinh}(x)$

`ctx.asinh`(x)

where `ctx` is `math53`, `mathc53`, `ctxcpp` or `ctxflint`.

Returns the inverse hyperbolic sine of x, $\operatorname{asinh}(x)$. See also Wikipedia [1256], MathWorld [885], NIST [484], Ehrhardt [295] (4.2.14), Flint [738], Flint [728], Mpmath [572].

The inverse hyperbolic sine can be defined as $\operatorname{asinh}(x) = \log\left(x + \sqrt{1+x^2}\right)$. The domain is the whole real line.

The inverse hyperbolic sine can be expressed in terms of related functions (with the principal-branch log and square root):

$$\operatorname{asinh}(z) = \log\left(z + \sqrt{1+z^2}\right) = \frac{1}{i}\operatorname{asin}(iz)$$

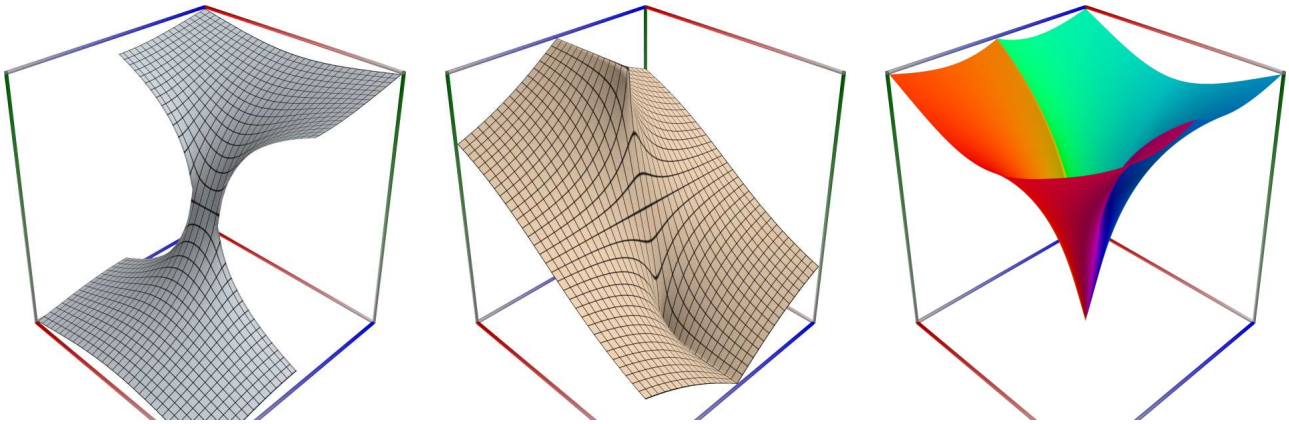

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.asinh(x)))
    fpm:  -2.33186371852127
    mpm:  -2.331863718521265936327261715425862726636461874427105176244556208727233718705158101023521 88
    dpm:  -2.331863718521265936327261715425862726636461874427105176244556208727233718705158101023521 88
    ipm: [-2.331863718521265936327261715425862726636461874427105176244556208727233718705158101023521 8766371,
          -2.331863718521265936327261715425862726636461874427105176244556208727233718705158101023521 8756553]
    gpm:  -2.331863718521265936327261715425862726636461874427105176244556208727233718705158101023521 8766
    apm: [-2.331863718521265936327261715425862726636461874427105176244556208727233718705158101023521 88 +/- 4.55e-90]
 math53:  -2.33186371852127
  sreal:  -2.331864
  dreal:  -2.33186371852127
  ereal:  -2.3318637185212659363
  qreal:  -2.331863718521265936327261715425 86
  oreal:  -2.331863718521265936327261715425862726636461874427105176244556208727233 7
  mreal:  -2.331863718521265936327261715425862726636461874427105176244556208727233718705158101023521 88
 sflint:  -2.331864
 dflint:  -2.33186371852127
 eflint:  -2.3318637185212659363
 qflint:  -2.331863718521265936327261715425 86
```

(continues on next page)

(continued from previous page)

```
 oflint:  -2.331863718521265936327261715425862726636461874427105176244556208727233718705158101023521 88
 mflint:  -2.331863718521265936327261715425862726636461874427105176244556208727233718705158101023521 88
 aflint: [-2.331863718521265936327261715425862726636461874427105176244556208727233718705158101023521 88 +/- 6.03e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.asinh(x)))
    fpm:  (-2.40001327479633, 0.368166225131482)
    mpm:  (-2.4000132747963341169530847356065687637697164736252, 0.36816622513148203890519048464792656351006083463991)
cmath53:  (-2.40001327479633, 0.368166225131482)
  qcplx:  (-2.4000132747963341169530847356065 7, 0.36816622513148203890519048464792 927)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.asinh(x))))
    fpm:  -2.40001327479633
    mpm:  -2.400013274796334116953084735606568763769716473625229523185392547307847006203248412905299 91
    dpm:  -2.400013274796334116953084735606568763769716473625229523185392547307847006203248412905299 91
    ipm: [-2.400013274796334116953084735606568763769716473625229523185392547307847006203248412905299 0094065,
          -2.400013274796334116953084735606568763769716473625229523185392547307847006203248412905299 0089156]
    gpm:  -2.400013274796334116953084735606568763769716473625229523185392547307847006203248412905299 0094
    apm: [-2.400013274796334116953084735606568763769716473625229523185392547307847006203248412905299 91 +/- 1.92e-90]
cmath53:  -2.40001327479633
  scplx:  -2.400013
  dcplx:  -2.40001327479633
  ecplx:  -2.400013274796334117
  qcplx:  -2.4000132747963341169530847356065 7
  ocplx:  -2.400013274796334116953084735606568763769716473625229523185392547307846 9
  mcplx:  -2.400013274796334116953084735606568763769716473625229523185392547307847006203248412905299 91
sflintc:  -2.400013
dflintc:  -2.40001327479633
eflintc:  -2.400013274796334117
qflintc:  -2.4000132747963341169530847356065 7
oflintc:  -2.400013274796334116953084735606568763769716473625229523185392547307847
mflintc:  -2.400013274796334116953084735606568763769716473625229523185392547307847006203248412905299 91
aflintc: [-2.400013274796334116953084735606568763769716473625229523185392547307847006203248412905299 91 +/- 5.77e-90]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.asinh(x))))
    fpm:  0.368166225131482
    mpm:  0.368166225131482036905190484647926563510060834639914624503321652976456514978785371855666241
    dpm:  0.368166225131482036905190484647926563510060834639914624503321652976456514978785371855666241
    ipm: [0.368166225131482036905190484647926563510060834639914624503321652976456514978785371855666240 44727,
          0.368166225131482036905190484647926563510060834639914624503321652976456514978785371855666240 81545]
    gpm:  0.368166225131482036905190484647926563510060834639914624503321652976456514978785371855666240 63
    apm: [0.368166225131482036905190484647926563510060834639914624503321652976456514978785371855666241 +/- 7.32e-91]
cmath53:  0.368166225131482
  scplx:  0.3681662
  dcplx:  0.368166225131482
  ecplx:  0.36816622513148203891
  qcplx:  0.368166225131482036905190484647927
  ocplx:  0.368166225131482036905190484647926563510060834639914624503321652976456 51
  mcplx:  0.368166225131482036905190484647926563510060834639914624503321652976456514978785371855666241
sflintc:  0.3681662
dflintc:  0.368166225131482
eflintc:  0.36816622513148203891
qflintc:  0.368166225131482036905190484647927
```

(continues on next page)

(continued from previous page)

```
oflintc:  0.36816622513148203890519048464792656351006083463991462450332165297645652
mflintc:  0.368166225131482038905190484647926563510060834639914624503321652976456514978785371855666241
aflintc: [0.36816622513148203890519048464792656351006083463991462450332165297645651497878537185566624 +/- 1.38e-90]
```

3.10.2 Inverse hyperbolic cosine, $\operatorname{acosh}(x)$

`ctx.`**`acosh`**`(`x`)`

where `ctx` is `math53`, `mathc53`, `ctxcpp` or `ctxflint`.

Returns the inverse hyperbolic cosine of x, $\operatorname{acosh}(x)$. See also Wikipedia [1256], MathWorld [882], NIST [484], Ehrhardt [295] (4.2.4), Flint [738], Flint [728], Mpmath [569].

The inverse hyperbolic cosine can be defined as $\operatorname{acosh}(x) = \log\left(x + \sqrt{x^2 - 1}\right)$. The domain is the closed interval $[1, +\infty)$.

The inverse hyperbolic cosine can be expressed in terms of related functions (with the principal-branch log and square root):

$$\operatorname{acosh}(z) = \log\left(z + \sqrt{z+1}\sqrt{z-1}\right) = \frac{\sqrt{z-1}}{\sqrt{1-z}}\operatorname{acos}(z)$$

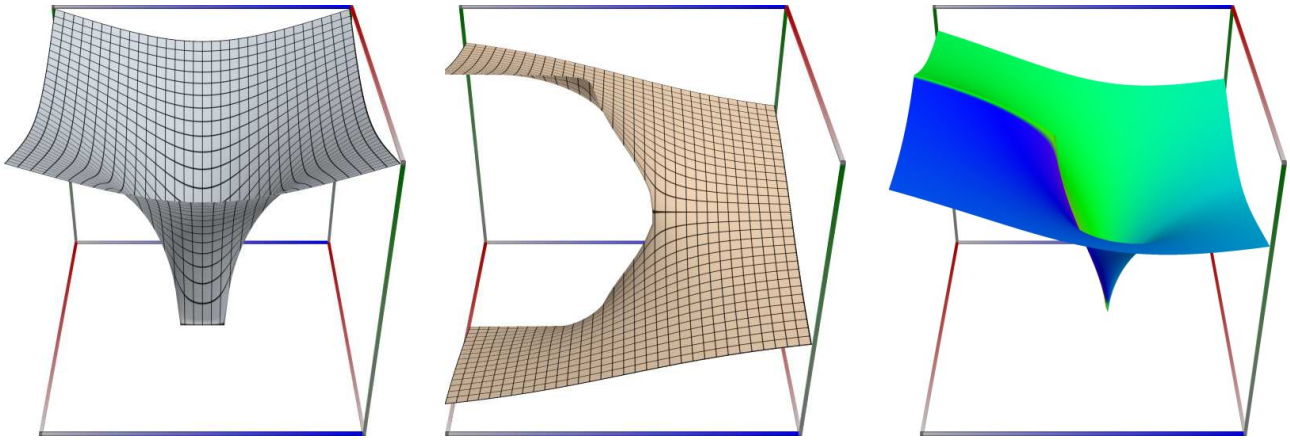

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> 5.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.acosh(x)))
    fpm:  2.31263441894902
    mpm:  2.31263441894901668299086911759343331048103432227775725786798972539314660775421432306118604 3
    dpm:  2.31263441894901668299086911759343331048103432227775725786798972539314660775421432306118604 3
    ipm: [2.31263441894901668299086911759343331048103432227775725786798972539314660775421432306118604326384,
          2.31263441894901668299086911759343331048103432227775725786798972539314660775421432306118604341111]
    gpm:  2.31263441894901668299086911759343331048103432227775725786798972539314660775421432306118604336
    apm: [2.31263441894901668299086911759343331048103432227775725786798972539314660775421432306118604 3 +/- 3.84e-90]
 math53:  2.31263441894902
  sreal:  2.312634
  dreal:  2.31263441894902
  ereal:  2.312634189490166 83
  qreal:  2.31263441894901668299086911759343
  oreal:  2.31263441894901668299086911759343331048103432227775725786798972539314 66
  mreal:  2.31263441894901668299086911759343331048103432227775725786798972539314660775421432306118604 3
 sflint:  2.312634
 dflint:  2.31263441894902
```

(continues on next page)

(continued from previous page)

```
 eflint:  2.312634418949016683
 qflint:  2.31263441894901668299086911759343
 oflint:  2.312634418949016682990869117593433104810343222777572578679897253931466077542143230611860 43
 mflint:  2.3126344189490166829908691175934331048103432227775725786798972539314660775421432306118604 3
 aflint: [2.3126344189490166829908691175934331048103432227775725786798972539314660775421432306118604 3 +/- 5.34e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.acosh(x)))
    fpm:  (2.3877960445782, 2.76209763080717)
    mpm:  (2.3877960445782021699561212768720476189495083854716, 2.7620976308071662874576003890536432967138753900203)
cmath53:  (2.3877960445782, 2.76209763080717)
  qcplx:  (2.3877960445782021699561212768720 5, 2.7620976308071662874576003890536 4)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.acosh(x))))
    fpm:  2.3877960445782
    mpm:  2.387796044578202169956121276872047618949508385471562101893453184611527367612615052660948 8
    dpm:  2.387796044578202169956121276872047618949508385471562101893453184611527367612615052660948 8
    ipm: [2.387796044578202169956121276872047618949508385471562101893453184611527367612615052660948 1762506,
          2.387796044578202169956121276872047618949508385471562101893453184611527367612615052660948 1772324]
    gpm:  2.387796044578202169956121276872047618949508385471562101893453184611527367612615052660948 1767
    apm: [2.387796044578202169956121276872047618949508385471562101893453184611527367612615052660948 8 +/- 4.77e-90]
cmath53:  2.3877960445782
  scplx:  2.387796
  dcplx:  2.3877960445782
  ecplx:  2.3877960445782021701
  qcplx:  2.387796044578202169956121276872 5
  ocplx:  2.387796044578202169956121276872047618949508385471562101893453184611527 4
  mcplx:  2.387796044578202169956121276872047618949508385471562101893453184611527367612615052660948 8
sflintc:  2.387796
dflintc:  2.3877960445782
eflintc:  2.3877960445782021699
qflintc:  2.387796044578202169956121276872 5
oflintc:  2.387796044578202169956121276872047618949508385471562101893453184611527 4
mflintc:  2.387796044578202169956121276872047618949508385471562101893453184611527367612615052660948 8
aflintc: [2.387796044578202169956121276872047618949508385471562101893453184611527367612615052660948 17 +/- 8.57e-90]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.acosh(x))))
    fpm:  2.76209763080717
    mpm:  2.762097630807166287457600389053643296713875390020264424005035199228073272629270383541568 98
    dpm:  2.762097630807166287457600389053643296713875390020264424005035199228073272629270383541568 98
    ipm: [2.762097630807166287457600389053643296713875390020264424005035199228073272629270383541568 9760458,
          2.762097630807166287457600389053643296713875390020264424005035199228073272629270383541568 9765367]
    gpm:  2.762097630807166287457600389053643296713875390020264424005035199228073272629270383541568 9765
    apm: [2.762097630807166287457600389053643296713875390020264424005035199228073272629270383541568 98 +/- 4.72e-90]
cmath53:  2.76209763080717
  scplx:  2.762098
  dcplx:  2.76209763080717
  ecplx:  2.7620976308071662874
  qcplx:  2.762097630807166287457600389053 4
  ocplx:  2.762097630807166287457600389053643296713875390020264424005035199228073 3
  mcplx:  2.762097630807166287457600389053643296713875390020264424005035199228073272629270383541568 98
sflintc:  2.762098
dflintc:  2.76209763080717
```

(continues on next page)

(continued from previous page)

```
eflintc:  2.7620976308071662874
qflintc:  2.76209763080716628745760038905364
oflintc:  2.762097630807166287457600389053643296713875390020264424005035199228073272629270383541568 98
mflintc:  2.762097630807166287457600389053643296713875390020264424005035199228073272629270383541568 98
aflintc: [2.762097630807166287457600389053643296713875390020264424005035199228073272629270383541569 0 +/- 3.13e-89]
```

3.10.3 Inverse hyperbolic tangent, $\operatorname{atanh}(x)$

`ctx.atanh(`x`)`

where `ctx` is `math53`, `mathc53`, `ctxcpp` or `ctxflint`.

Returns the inverse hyperbolic tangent of x, $\operatorname{atanh}(x)$. See also Wikipedia [1256], MathWorld [886], NIST [484], Ehrhardt [295] (4.2.16), Flint [738], Flint [728], Mpmath [573].

The inverse hyperbolic tangent can be defined as $\operatorname{atanh}(x) = \frac{1}{2}\log\left(\frac{1+x}{1-x}\right)$. The domain is the open interval $(-1, 1)$.

The inverse hyperbolic tangent can be expressed in terms of related functions (with the principal-branch log and square root):

$$\operatorname{atanh}(z) = \frac{1}{2}\log\left(\frac{1+z}{1-z}\right) = \frac{1}{2}\left[\log(1+z) - \log(1-z)\right] = \frac{1}{i}\operatorname{atan}(iz)$$

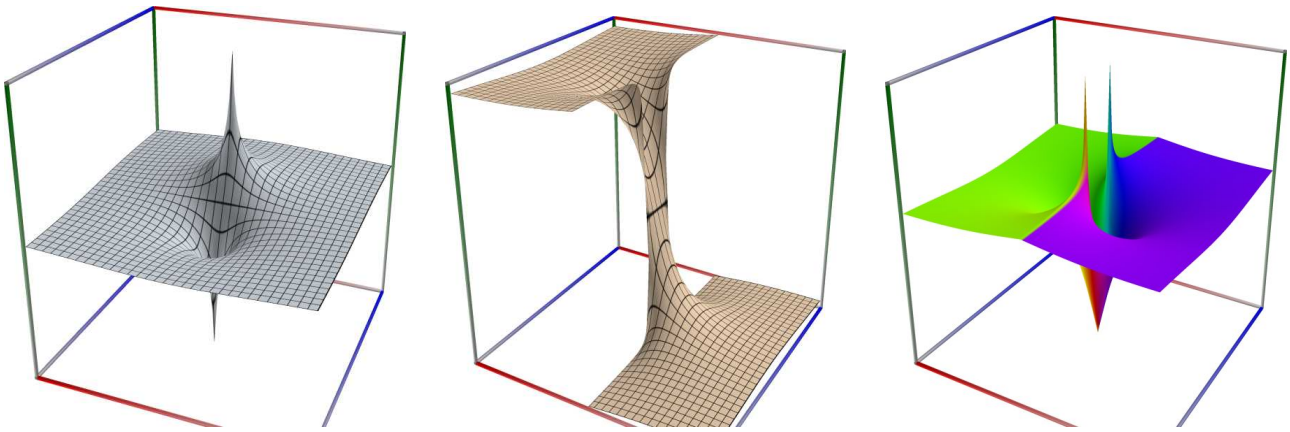

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 0.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.atanh(x)))
    fpm:  0.100335347731076
    mpm:  0.100335347731075580635726552060038945263362869145959135874589520927792518738009389663911599
    dpm:  0.100335347731075580635726552060038945263362869145959135874589520927792518738009389663911599
    ipm: [0.100335347731075580635726552060038945263362869145959135874589520927792518738009389663911599123 07,
          0.100335347731075580635726552060038945263362869145959135874589520927792518738009389663911599322 5]
    gpm:  0.100335347731075580635726552060038945263362869145959135874589520927792518738009389663911599 18
    apm: [0.100335347731075580635726552060038945263362869145959135874589520927792518738009389663911599 +/- 2.01e-91]
 math53:  0.100335347731076
  sreal:  0.1003354
  dreal:  0.100335347731076
  ereal:  0.10033534773107558064
  qreal:  0.100335347731075580635726552060039
  oreal:  0.100335347731075580635726552060038945263362869145959135874589520927792518738009389663911599
  mreal:  0.100335347731075580635726552060038945263362869145959135874589520927792518738009389663911599
```

(continues on next page)

(continued from previous page)

```
 sflint:  0.1003354
 dflint:  0.100335347731076
 eflint:  0.10033534773107558064
 qflint:  0.1003353477310755806357265520600389452633628691459591358745895209277925187380093896639115 99
 oflint:  0.1003353477310755806357265520600389452633628691459591358745895209277925187380093896639115 99
 mflint:  0.1003353477310755806357265520600389452633628691459591358745895209277925187380093896639115 99
 aflint: [0.1003353477310755806357265520600389452633628691459591358745895209277925187380093896639115 99 +/- 2.31e-91]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.atanh(x)))
    fpm:  (-0.170811826236296, 1.50228656896825)
    mpm:  (-0.17081182623629573129960565062369952332364926681651, 1.50228656896825115351144128741393045889627503639)
cmath53:  (-0.170811826236296, 1.50228656896825)
  qcplx:  (-0.17081182623629573129960565062370, 1.50228656896825115351144128741393)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.atanh(x))))
    fpm:  -0.170811826236296
    mpm:  -0.17081182623629573129960565062369952332364926681651333173354686805057100497816709729874736 67
    dpm:  -0.17081182623629573129960565062369952332364926681651333173354686805057100497816709729874736 67
    ipm: [-0.17081182623629573129960565062369952332364926681651333173354686805057100497816709729874736 6722598,
          -0.17081182623629573129960565062369952332364926681651333173354686805057100497816709729874736 673507]
    gpm:  -0.17081182623629573129960565062369952332364926681651333173354686805057100497816709729874736 6695
    apm: [-0.17081182623629573129960565062369952332364926681651333173354686805057100497816709729874736 67 +/- 9.20e-91]
cmath53:  -0.170811826236296
  scplx:  -0.1708118
  dcplx:  -0.170811826236296
  ecplx:  -0.17081182623629573129
  qcplx:  -0.170811826236295731299605650623699523323649266816513317335468680505710049781670972987473667
  ocplx:  -0.17081182623629573129960565062369952332364926681651333173354686805057100
  mcplx:  -0.170811826236295731299605650623699523323649266816513317335468680505710049781670972987473667
sflintc:  -0.1708118
dflintc:  -0.170811826236296
eflintc:  -0.17081182623629573129
qflintc:  -0.170811826236295731299605650623699523323649266816513317335468680505710049781670972987473667
oflintc:  -0.17081182623629573129960565062369952332364926681651333173354686805057100
mflintc:  -0.170811826236295731299605650623699523323649266816513317335468680505710049781670972987473667
aflintc: [-0.170811826236295731299605650623699523323649266816513317335468680505710049781670972987473667 +/- 4.95e-90]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.atanh(x))))
    fpm:  1.50228656896825
    mpm:  1.50228656896825115351144128741393045889627503639767897407102892199860134812875731408614441
    dpm:  1.50228656896825115351144128741393045889627503639767897407102892199860134812875731408614441
    ipm: [1.50228656896825115351144128741393045889627503639767897407102892199860134812875731408614440 98566,
          1.50228656896825115351144128741393045889627503639767897407102892199860134812875731408614441 03475]
    gpm:  1.50228656896825115351144128741393045889627503639767897407102892199860134812875731408614441 01
    apm: [1.50228656896825115351144128741393045889627503639767897407102892199860134812875731408614441 +/- 7.10e-91]
cmath53:  1.50228656896825
  scplx:  1.502287
  dcplx:  1.50228656896825
  ecplx:  1.5022865689682511535
  qcplx:  1.50228656896825115351144128741393
  ocplx:  1.5022865689682511535114412874139304588962750363976789740710289219986013
  mcplx:  1.50228656896825115351144128741393045889627503639767897407102892199860134812875731408614441
```

(continues on next page)

(continued from previous page)

```
sflintc:  1.502287
dflintc:  1.50228656896825
eflintc:  1.5022865689682511535
qflintc:  1.502286568968251153511441287413930458896275036397678974071028921998601348128757314086144 41
oflintc:  1.502286568968251153511441287413930458896275036397678974071028921998601348128757314086144 41
mflintc:  1.502286568968251153511441287413930458896275036397678974071028921998601348128757314086144 41
aflintc: [1.502286568968251153511441287413930458896275036397678974071028921998601348128757314086144 41 +/- 3.70e-90]
```

3.10.4 Inverse hyperbolic cotangent, $\operatorname{acoth}(x)$

`ctx.acoth(x)`

Returns the inverse hyperbolic cotangent of x, $\operatorname{acoth}(x)$. See also Wikipedia [1256], MathWorld [883], NIST [484], Ehrhardt [295] (4.2.7), Mpmath [570].

The real inverse hyperbolic cotangent can be defined as $\operatorname{acoth}(x) = \frac{1}{2}\log\left(\frac{x+1}{x-1}\right)$. The domain is the union of the open intervals $(-\infty, -1)$ and $(1, +\infty)$.

The complex inverse hyperbolic cotangent can be expressed in terms of related functions (with the principal-branch log and square root):

$$\operatorname{acoth}(z) = \frac{1}{2}\log\left(\frac{z+1}{z-1}\right) = \frac{1}{2}\left[\log\left(1+\frac{1}{z}\right) - \log\left(1-\frac{1}{z}\right)\right] = \frac{1}{i}\operatorname{acot}(-iz).$$

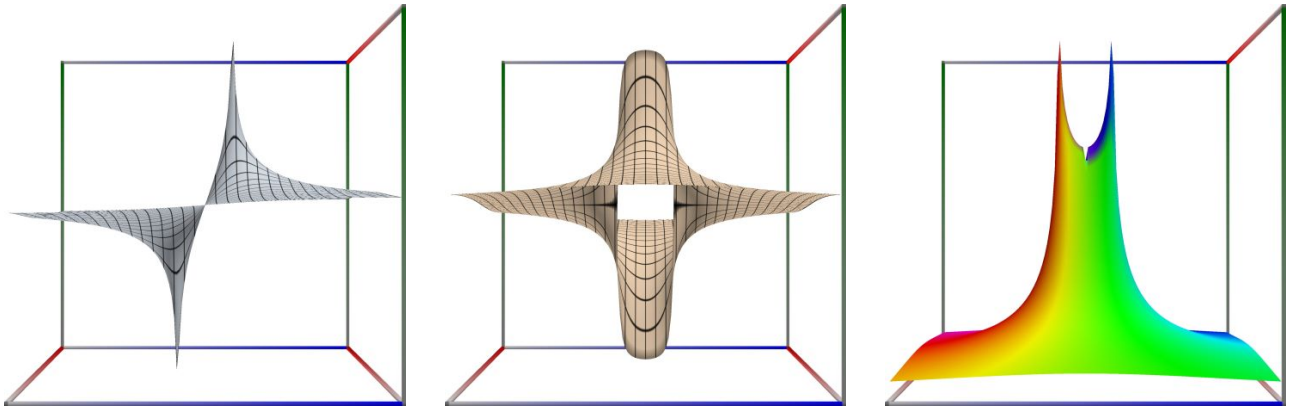

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.acoth(x)))
    fpm:  -0.198650898734502
    mpm:  -0.19865089873450172244231286519410357896963563684097971465906036807973059521964561261155603 2
    dpm:  -0.19865089873450172244231286519410357896963563684097971465906036807973059521964561261155603 2
    ipm: [-0.19865089873450172244231286519410357896963563684097971465906036807973059521964561261155603258735,
          -0.19865089873450172244231286519410357896963563684097971465906036807973059521964561261155603228053]
    gpm:  -0.19865089873450172244231286519410357896963563684097971465906036807973059521964561261155603237
    apm: [-0.19865089873450172244231286519410357896963563684097971465906036807973059521964561261155603 2 +/- 5.06e-91]
 math53:  -0.198650898734502
  sreal:  -0.1986509
  dreal:  -0.198650898734502
  ereal:  -0.19865089873450172245
  qreal:  -0.19865089873450172244231286519410 4
```

(continues on next page)

(continued from previous page)

```
  oreal:  -0.19865089873450172244231286519410357896963563684097971465906036807973059
  mreal:  -0.19865089873450172244231286519410357896963563684097971465906036807973059521964561261155603 2
 sflint:  -0.1986509
 dflint:  -0.198650898734502
 eflint:  -0.19865089873450172244
 qflint:  -0.198650898734501722442312865194104
 oflint:  -0.19865089873450172244231286519410357896963563684097971465906036807973059521964561261155603 6
 mflint:  -0.19865089873450172244231286519410357896963563684097971465906036807973059521964561261155603 2
 aflint: [-0.19865089873450172244231286519410357896963563684097971465906036807973059521964561261155603 2 +/- 5.45e-91]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.acoth(x)))
    fpm:  (-0.170811826236296, -0.0685097578266455)
    mpm:  (-0.17081182623629573129960565062369952332364926681651, -0.
↪0685097578266454657198804042258209832023096632 83)
cmath53:  (-0.170811826236296, -0.0685097578266455)
  qcplx:  (-0.17081182623629573129960565062 37, -0.0685097578266454657198804042258 1)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.acoth(x))))
    fpm:  -0.170811826236296
    mpm:  -0.17081182623629573129960565062369952332364926681651331733546868050571004978167097298747366 7
    dpm:  -0.17081182623629573129960565062369952332364926681651331733546868050571004978167097298747366 7
    ipm: [-0.17081182623629573129960565062369952332364926681651331733546868050571004978167097298747366713393,
          -0.17081182623629573129960565062369952332364926681651331733546868050571004978167097298747366673507]
    gpm:  -0.17081182623629573129960565062369952332364926681651331733546868050571004978167097298747366698
    apm: [-0.17081182623629573129960565062369952332364926681651331733546868050571004978167097298747366 7 +/- 3.43e-91]
cmath53:  -0.170811826236296
  scplx:  -0.1708118
  dcplx:  -0.170811826236296
  ecplx:  -0.17081182623629573129
  qcplx:  -0.17081182623629573129960565062 37
  ocplx:  -0.17081182623629573129960565062369952332364926681651331733546868050571005
  mcplx:  -0.17081182623629573129960565062369952332364926681651331733546868050571004978167097298747366 7
sflintc:  -0.1708118
dflintc:  -0.170811826236296
eflintc:  -0.170811826236296 13
qflintc:  -0.17081182623629573129960565062 37
oflintc:  -0.17081182623629573129960565062369952332364926681651331733546868050571005
mflintc:  -0.17081182623629573129960565062369952332364926681651331733546868050571004978167097298747366 7
aflintc: [-0.17081182623629573129960565062369952332364926681651331733546868050571004978167097298747367 +/- 4.32e-90]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.acoth(x))))
    fpm:  -0.0685097578266455
    mpm:  -0.0685097578266454657198804042258209832023096632898739364164433741553068550143471852278730025
    dpm:  -0.0685097578266454657198804042258209832023096632898739364164433741553068550143471852278730025
    ipm: [-0.0685097578266454657198804042258209832023096632898739364164433741553068550143471852278730025 21848,
          -0.0685097578266454657198804042258209832023096632898739364164433741553068550143471852278730024 5143]
    gpm:  -0.0685097578266454657198804042258209832023096632898739364164433741553068550143471852278730024 76
    apm: [-0.0685097578266454657198804042258209832023096632898739364164433741553068550143471852278730027 +/- 6.77e-91]
cmath53:  -0.0685097578266455
  scplx:  -0.06850976
  dcplx:  -0.0685097578266455
  ecplx:  -0.06850975782664546572
```

(continues on next page)

(continued from previous page)

```
  qcplx:  -0.068509757826645465719880404225821
  ocplx:  -0.068509757826645465719880404225820983202309663289873936416443374155306855
  mcplx:  -0.068509757826645465719880404225820983202309663289873936416443374155306855014347185227873002 3
sflintc:  -0.06850976
dflintc:  -0.0685097578266455
eflintc:  -0.06850975782664546572
qflintc:  -0.068509757826645465719880404225821
oflintc:  -0.068509757826645465719880404225820983202309663289873936416443374155306855
mflintc:  -0.068509757826645465719880404225820983202309663289873936416443374155306855014347185227873002 3
aflintc: [-0.068509757826645465719880404225820983202309663289873936416443374155306855014347185227873 00 +/- 3.07e-90]
```

3.10.5 Inverse hyperbolic secant, $\operatorname{asech}(x)$

`ctx.asech`(x)

where `ctx` is `math53`, `mathc53`, `ctxcpp` or `ctxflint`.

Returns the inverse hyperbolic secant of x, $\operatorname{asech}(x)$. See also Wikipedia [1256], MathWorld [884], NIST [484], Ehrhardt [295] (4.2.12), Mpmath [571].

The inverse hyperbolic secant can be defined as $\operatorname{asech}(x) = \log\left(\frac{1}{x} + \sqrt{\frac{1}{x^2} - 1}\right)$. The domain is the semi-open interval $(0, 1]$.

The inverse hyperbolic secant can be expressed in terms of related functions (with the principal-branch log and square root):

$$\operatorname{asech}(z) = \log\left(\frac{1}{z} + \sqrt{\frac{1}{z} + 1}\sqrt{\frac{1}{z} - 1}\right)$$

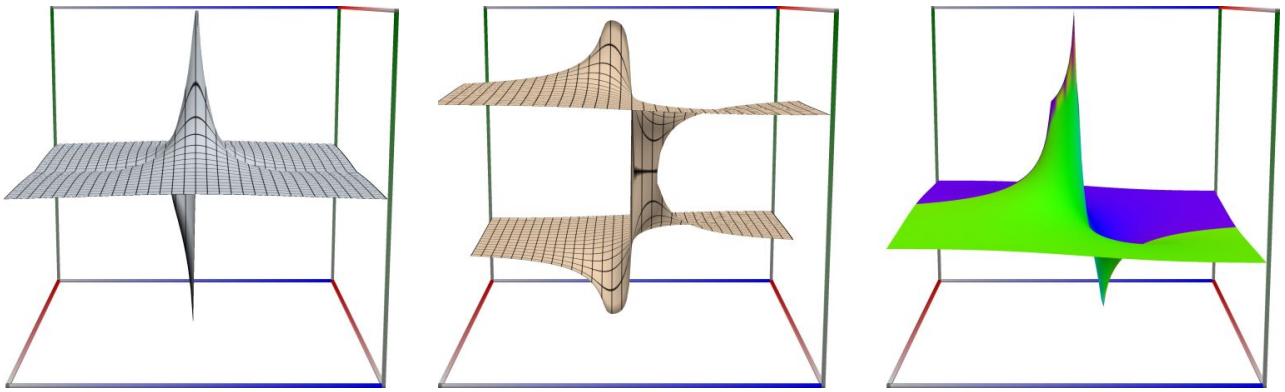

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 0.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.asech(x)))
    fpm:  2.99322284612638
    mpm:  2.9932228461263808979126677137741829130836604511809806426851456009774992267097398782806309 6
    dpm:  0.1
    ipm: [2.9932228461263808979126677137741829130836604511809806426851456009774992267097398782806309 61966,
          2.9932228461263808979126677137741829130836604511809806426851456009774992267097398782806309 634388]
    gpm:  2.9932228461263808979126677137741829130836604511809806426851456009774992267097398782806309629
    apm: [2.9932228461263808979126677137741829130836604511809806426851456009774992267097398782806309 6 +/- 3.32e-90]
```

(continues on next page)

(continued from previous page)

```
 math53:  2.99322284612638
  sreal:  2.993223
  dreal:  2.99322284612638
  ereal:  2.9932228461263808979
  qreal:  2.993222846126380897912667713774182913083660451180980642685145600977499226709739878280630 96
  oreal:  2.993222846126380897912667713774182913083660451180980642685145600977499226709739878280630 96
  mreal:  2.993222846126380897912667713774182913083660451180980642685145600977499226709739878280630 96
 sflint:  2.993223
 dflint:  2.99322284612638
 eflint:  2.9932228461263808979
 qflint:  2.993222846126380897912667713774182913083660451180980642685145600977499226709739878280630 96
 oflint:  2.993222846126380897912667713774182913083660451180980642685145600977499226709739878280630 96
 mflint:  2.993222846126380897912667713774182913083660451180980642685145600977499226709739878280630 96
 aflint: [2.993222846126380897912667713774182913083660451180980642685145600977499226709739878280630 96 +/- 4.44e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.asech(x)))
    fpm:  (0.067572171292378, -1.74117556516144)
    mpm:  (0.067572171292377961289703980926987705875074592221143, -1.741175565161443489422375526920782616207248 1152336)
cmath53:  (0.067572171292378, -1.74117556516144)
  qcplx:  (0.067572171292377961289703980926987 7, -1.74117556516144348942237552692078 )
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.asech(x))))
    fpm:  0.067572171292378
    mpm:  0.067572171292377961289703980926987705875074592221142978568560727842835954357899024287 985657
    dpm:  -5.1
    ipm: [0.067572171292377961289703980926987705875074592221142978568560727842835954357899024287098565019988,
          0.067572171292377961289703980926987705875074592221142978568560727842835954357899024287098566216 58]
    gpm:  0.067572171292377961289703980926987705875074592221142978568560727842835954357899024287098568
    apm: [0.067572171292377961289703980926987705875074592221142978568560727842835954357899024287098 57 +/- 5.67e-90]
cmath53:  0.067572171292378
  scplx:  0.06757224
  dcplx:  0.0675721712923783
  ecplx:  0.067572171292377961204
  qcplx:  0.067572171292377961289703980926987 7
  ocplx:  0.067572171292377961289703980926987705875074592221142978568560727842835957
  mcplx:  0.067572171292377961289703980926987705875074592221142978568560727842835954357899024287 985641
sflintc:  0.06757218
dflintc:  0.067572171292378
eflintc:  0.067572171292377961292
qflintc:  0.067572171292377961289703980926987 7
oflintc:  0.067572171292377961289703980926987705875074592221142978568560727842835955
mflintc:  0.067572171292377961289703980926987705875074592221142978568560727842835954357899024287 985641
aflintc: [0.067572171292377961289703980926987705875074592221142978568560727842835954357899024287098 56 +/- 8.17e-90]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.asech(x))))
    fpm:  -1.74117556516144
    mpm:  -1.741175565161443489422375526920782616207248115233585977604949384034873279568739504505 53638
    dpm:  2.0
    ipm: [-1.741175565161443489422375526920782616207248115233585977604949384034873279568739504505536 3775384,
          -1.741175565161443489422375526920782616207248115233585977604949384034873279568739504505536 3770474]
    gpm:  -1.741175565161443489422375526920782616207248115233585977604949384034873279568739504505536 3773
    apm: [-1.741175565161443489422375526920782616207248115233585977604949384034873279568739504505 53638 +/- 3.49e-90]
```

(continues on next page)

(continued from previous page)

```
cmath53:  -1.74117556516144
  scplx:  -1.741176
  dcplx:  -1.74117556516144
  ecplx:  -1.7411755651614434894
  qcplx:  -1.741175565161443489422375526920782616207248115233585977604949384034873279568739504505536 38
  ocplx:  -1.741175565161443489422375526920782616207248115233585977604949384034873279568739504505536 33
  mcplx:  -1.741175565161443489422375526920782616207248115233585977604949384034873279568739504505536 3838
sflintc:  -1.741176
dflintc:  -1.74117556516144
eflintc:  -1.7411755651614434894
qflintc:  -1.741175565161443489422375526920782
oflintc:  -1.741175565161443489422375526920782616207248115233585977604949384034873279568739504505536 33
mflintc:  -1.741175565161443489422375526920782616207248115233585977604949384034873279568739504505536 3838
aflintc: [-1.741175565161443489422375526920782616207248115233585977604949384034873279568739504505536 38 +/- 6.24e-90]
```

3.10.6 Inverse Hyperbolic Cosecant, $\operatorname{acsch}(x)$

`ctx.acsch(`x`)`

where `ctx` is `math53`, `mathc53`, `ctxcpp` or `ctxflint`.

Returns the inverse hyperbolic cosecant of x, $\operatorname{acsch}(x)$. See also Wikipedia [1256], MathWorld [881], NIST [438], Ehrhardt [295] (4.2.10), Mpmath [568].

The real inverse hyperbolic cosecant can be defined as $\operatorname{acsch}(x) = \log\left(\frac{1}{x} + \sqrt{\frac{1}{x^2} + 1}\right)$. The domain is the real line with 0 removed.

The complex inverse hyperbolic cosecant can be expressed in terms of related functions (with the principal-branch log and square root):

$$\operatorname{acsch}(z) = \log\left(\frac{1}{z} + \sqrt{\frac{1}{z^2} + 1}\right)$$

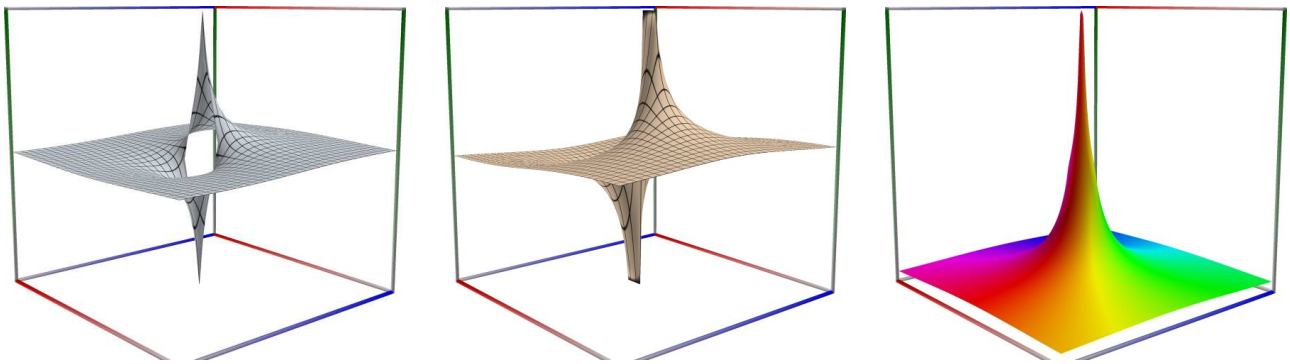

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.acsch(x)))
    fpm:  -0.194843254327983
    mpm:  -0.194843254327983417752778916916954330899605129892242399362024591851316384845699582223685329
    dpm:  -0.194843254327983417752778916916954330899605129892242399362024591851316384845699582223685329
```

(continues on next page)

(continued from previous page)

```
    ipm: [-0.19484325432798341775277891691695433089960512989224239936202459185131638484569958222368532928527,
          -0.19484325432798341775277891691695433089960512989224239936202459185131638484569958222368532885572]
    gpm:  -0.19484325432798341775277891691695433089960512989224239936202459185131638484569958222368532901
    apm: [-0.19484325432798341775277891691695433089960512989224239936202459185131638484569958222368532901 +/- 1.12e-91]
 math53:  -0.194843254327983
  sreal:  -0.1948433
  dreal:  -0.194843254327983
  ereal:  -0.19484325432798341776
  qreal:  -0.194843254327983417752778916916954
  oreal:  -0.194843254327983417752778916916954330899605129892242399362024591851316384845699582223685329
  mreal:  -0.194843254327983417752778916916954330899605129892242399362024591851316384845699582223685329
 sflint:  -0.1948433
 dflint:  -0.194843254327983
 eflint:  -0.19484325432798341776
 qflint:  -0.194843254327983417752778916916954
 oflint:  -0.194843254327983417752778916916954330899605129892242399362024591851316384845699582223685329
 mflint:  -0.194843254327983417752778916916954330899605129892242399362024591851316384845699582223685329
 aflint: [-0.194843254327983417752778916916954330899605129892242399362024591851316384845699582223685329 +/- 4.68e-91]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.acsch(x)))
    fpm:  (-0.169498530646603, -0.0657457944996314)
    mpm:  (-0.16949853064660337245661878132351084839640152305681, -0.
↪0657457944996313515661318237455183496622387422743734183159662281265330672752774200156952847)
cmath53:  (-0.169498530646603, -0.0657457944996314)
  qcplx:  (-0.16949853064660337245661878132351 1, -0.065745794499631351566131823745518 184)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.acsch(x))))
    fpm:  -0.169498530646603
    mpm:  -0.169498530646603372456618781323510848396401523056807940889049256536899074381581500488956852
    dpm:  -0.169498530646603372456618781323510848396401523056807940889049256536899074381581500488956852
    ipm: [-0.169498530646603372456618781323510848396401523056807940889049256536899074381581500488956852185218258,
          -0.169498530646603372456618781323510848396401523056807940889049256536899074381581500488956851132349]
    gpm:  -0.169498530646603372456618781323510848396401523056807940889049256536899074381581500488956851685172
    apm: [-0.169498530646603372456618781323510848396401523056807940889049256536899074381581500488956851685 +/- 2.20e-90]
cmath53:  -0.169498530646603
  scplx:  -0.1694984
  dcplx:  -0.169498530646603
  ecplx:  -0.16949853064660337244
  qcplx:  -0.169498530646603372456618781323511
  ocplx:  -0.169498530646603372456618781323510848396401523056807940889049256536899074
  mcplx:  -0.169498530646603372456618781323510848396401523056807940889049256536899074381581500488956851
sflintc:  -0.1694985
dflintc:  -0.169498530646603
eflintc:  -0.16949853064660337246
qflintc:  -0.169498530646603372456618781323511
oflintc:  -0.169498530646603372456618781323510848396401523056807940889049256536899074
mflintc:  -0.169498530646603372456618781323510848396401523056807940889049256536899074381581500488956851
aflintc: [-0.169498530646603372456618781323510848396401523056807940889049256536899074381581500488956851685 +/- 3.23e-90]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.acsch(x))))
    fpm:  -0.0657457944996314
    mpm:  -0.065745794499631351566131823745518349662238742274373418315966228126533067275277420015695284 7
```

(continues on next page)

(continued from previous page)

```
    dpm:  -0.065745794499631351566131823745518349662238742274373418315966228126533067275277420015695284731963,
    ipm: [-0.065745794499631351566131823745518349662238742274373418315966228126533067275277420015695284731963,
          -0.065745794499631351566131823745518349662238742274373418315966228126533067275277420015695284609236]
    gpm:  -0.065745794499631351566131823745518349662238742274373418315966228126533067275277420015695284655
    apm: [-0.065745794499631351566131823745518349662238742274373418315966228126533067275277420015695285 +/- 4.76e-91]
cmath53:  -0.0657457944996314
  scplx:  -0.0657458
  dcplx:  -0.0657457944996314
  ecplx:  -0.06574579449631351564
  qcplx:  -0.065745794499631351566131823745518 4
  ocplx:  -0.065745794499631351566131823745518349662238742274373418315966228126533068
  mcplx:  -0.065745794499631351566131823745518349662238742274373418315966228126533067275277420015695284 6
sflintc:  -0.06574579
dflintc:  -0.0657457944996314
eflintc:  -0.06574579449963135157
qflintc:  -0.065745794499631351566131823745518 4
oflintc:  -0.065745794499631351566131823745518349662238742274373418315966228126533068
mflintc:  -0.065745794499631351566131823745518349662238742274373418315966228126533067275277420015695284 6
aflintc: [-0.065745794499631351566131823745518349662238742274373418315966228126533067275277420015695285 +/- 8.67e-91]
```

3.11 Factorials, Gamma and related functions

3.11.1 Gamma function, $\Gamma(x)$

`ctx.gamma(x)`

where `ctx` is `math53`, `mathc53`, `ctxboost`, `ctxflint`.

Returns the gamma function $\Gamma(x) = \int_0^\infty t^{x-1} e^{-t}\,\mathrm{d}t$, for any real or complex x with $\Re(x) > 0$ and for $\Re(x) < 0$ by analytic continuation.

See also Wikipedia [1253], MathWorld [880], NIST [22], BoostMath [101], Ehrhardt [295] (3.5.1.1), Ehrhardt [295] (4.2.38), Flint [735], Flint [725], Mpmath [587].

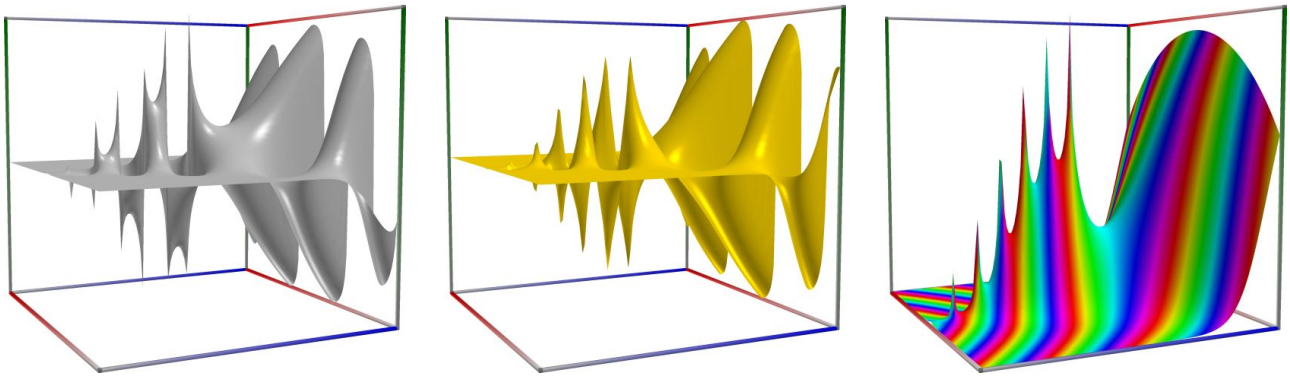

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
   >>> from xlcalcnet import *
   >>> x = -5.1; dps = 90
   >>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.gamma(x)))
   fpm:  0.0713672772338105
   mpm:  0.0713672772338102013261365137797375388387133361837385671035988940827839634452177072190160181
   dpm:  0.0713672772338102013261365137797375388387133361837385671035988940827839634452177072190160183
   ipm: [0.0713672772338102013261365137797375388387133361837385671035988940827839634452177072190160180560609,
         0.0713672772338102013261365137797375388387133361837385671035988940827839634452177072190160189770064]
   gpm:  0.0713672772338102013261365137797375388387133361837385671035988940827839634452177072190160181118
   apm: [0.0713672772338102013261365137797375388387133361837385671035988940827839634452177072190160189 +/- 2.03e-90]
math53:  0.0713672772338105
 sreal:  0.07136736
 dreal:  0.0713672772338105
 ereal:  0.071367277233810201399
 qreal:  0.071367277233810201326136513779737853883871333618373856710359889408278396344521770721901602 +/- 2.03e-90]
 oreal:  0.071367277233810201326136513779737538838713336183738567103598894082783981
 mreal:  0.071367277233810201326136513779737538838713336183738567103598894082783963445217707219016018118
sflint:  0.07136735
dflint:  0.0713672772338105
eflint:  0.071367277233810201399
qflint:  0.071367277233810201326136513779737853883871333618373856710359889408278396344521770721901602 +/- 2.03e-90]
oflint:  0.071367277233810201326136513779737538838713336183738567103598894082783975
mflint:  0.071367277233810201326136513779737538838713336183738567103598894082783963445217707219016018118
aflint: [0.071367277233810201326136513779737538838713336183738567103598894082783963445217707219016019 +/- 9.34e-91]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.gamma(x)))
    fpm:  (3.86562806138907E-06, -0.000116714602754772)
    mpm:  (0.000003865628061388949768998076401310179508321230646100321677392894515579659233357498164264245
↪3346176, -0.000116714602754772239942731453814449614349302093242749353683374544702207893599932547083739
↪11977846)
cmath53:  (3.86562806138899E-06, -0.000116714602754773)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.gamma(x))))
    fpm:  3.86562806138907E-06
    mpm:  0.000003865628061388949768998076401310179508321230646100321677392894515579659233357498164264245
↪33
    dpm:  0.000003865628061388949768998076401310179508321230646100321677392894515579659233357498164264245
↪4
    ipm: [0.000003865628061388949768998076401310179508321230646100321677392894515579659233357498164264245
↪3346176,
          0.000003865628061388949768998076401310179508321230646100321677392894515579659233357498164264245
↪6632713]
    gpm:  3.865628061388949768998076401310179508321230646100321677392894515579659233357498164264245
↪3299e-06
    apm: [3.865628061388949768998076401310179508321230646100321677392894515579659233357498164264246e-6 +/
↪- 8.82e-94]
cmath53:  3.86562806138899E-06
sflintc:  3.86566E-06
dflintc:  3.86562806138907E-06
eflintc:  3.865628061388949 7978e-06
qflintc:  3.865628061388949768998076401310 28e-06
oflintc:  3.865628061388949768998076401310179508321230646100321677392894515579663 9e-06
mflintc:  3.865628061388949768998076401310179508321230646100321677392894515579659233357498164264245
↪66E-06
aflintc: [3.865628061388949768998076401310179508321230646100321677392894515579659233357498164264246e-6 +/
↪- 7.80e-94]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.gamma(x))))
    fpm:  -0.000116714602754772
    mpm:  -0.000116714602754772239942731453814449614349302093242749353683374544702207893599932547083739
↪12
    dpm:  -0.000116714602754772239942731453814449614349302093242749353683374544702207893599932547083739
↪12
    ipm: [-0.000116714602754772239942731453814449614349302093242749353683374544702207893599932547083739
↪12000318,
          -0.000116714602754772239942731453814449614349302093242749353683374544702207893599932547083739
↪11977846]
    gpm:  -0.000116714602754772239942731453814449614349302093242749353683374544702207893599932547083739
↪12
    apm: [-0.000116714602754772239942731453814449614349302093242749353683374544702207893599932547083739
↪120 +/- 5.13e-94]
cmath53:  -0.000116714602754773
sflintc:  -0.0001167146
dflintc:  -0.000116714602754772
eflintc:  -0.0001167146027547722 3996
qflintc:  -0.000116714602754772239942731453 1445
oflintc:  -0.000116714602754772239942731453814449614349302093242749353683374544702207 9
mflintc:  -0.000116714602754772239942731453814449614349302093242749353683374544702207893599932547083739
↪12
aflintc: [-0.000116714602754772239942731453814449614349302093242749353683374544702207893599932547083739
↪120 +/- 5.27e-94]
```

3.11.2 Auxiliary function $\Gamma(x+1)-1$

`ctx.gamma1pm1(z)`

where `ctx` is `math53`, `ctxcpp`, `ctxboost` or `ctxflint`.

Returns $\Gamma(1+x)-1$, accurate also for x near 0.

See also Wikipedia [1253], MathWorld [880], NIST [22], BoostMath [101], Ehrhardt [295] (3.5.1.2)., Flint [735], Flint [725].

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.gamma1pm1(x)))
    fpm:  -1.36397311389243
    mpm:  -1.3639731138924320267632962202766614480774380145370666922283543598221982135706103068169816968567,
          -1.3639731138924320267632962202766614480774380145370666922283543598221982135706103068169816919476]
    gpm:  -1.3639731138924320267632962202766614480774380145370666922283543598221982135706103068169816924
    apm: [-1.3639731138924320267632962202766614480774380145370666922283543598221982135706103068169817 0 +/- 8.25e-90]
 math53:  -1.36397311389243
  sreal:  -1.363973
  dreal:  -1.36397311389243
  ereal:  -1.3639731138924320274
  qreal:  -1.3639731138924320267632962202766
  oreal:  -1.363973113892432026763296220276661448077438014537066692228354359822198213570610306816981
  mreal:  -1.3639731138924320267632962202766614480774380145370666922283543598221982135706103068169817
 sflint:  -1.363973
 dflint:  -1.36397311389243
 eflint:  -1.3639731138924320271
 qflint:  -1.3639731138924320267632962202766
 oflint:  -1.363973113892432026763296220276661448077438014537066692228354359822198213570610306816981
 mflint:  -1.3639731138924320267632962202766614480774380145370666922283543598221982135706103068169817
 aflint: [-1.3639731138924320267632962202766614480774380145370666922283543598221982135706103068169817 0 +/- 8.76e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.gamma1pm1(x)))
    fpm:  (-0.999786285497604, 0.000602975730172117)
    mpm:  (-0.99978628549760353916393642728201778268679383408981, 0.
↪0006029757301721163232459265672563133921980831368302223471399959670124195758263709864555980002)
cmath53:  (-0.999786285497604, 0.000602975730172118)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.gamma1pm1(x))))
    fpm:  -0.999786285497604
    mpm:  -0.99978628549760353916393642728201778268679383408980961293318795467262504047489025814647026
          9
    dpm:  -0.99978628549760353916393642728201778268679383408980961293318795467262504047489025814647026
          9
    ipm: [-0.99978628549760353916393642728201778268679383408980961293318795467262504047489025814647026951017,
          -0.99978628549760353916393642728201778268679383408980961293318795467262504047489025814647026938744]
    gpm:  -0.99978628549760353916393642728201778268679383408980961293318795467262504047489025814647026939
    apm: [-0.99978628549760353916393642728201778268679383408980961293318795467262504047489025814647026
          9 +/- 5.15e-91]
cmath53:  -0.999786285497604
sflintc:  -0.9997863
dflintc:  -0.999786285497604
eflintc:  -0.99978628549760353915
qflintc:  -0.99978628549760353916393642728201
oflintc:  -0.99978628549760353916393642728201778268679383408980961293318795467262504
mflintc:  -0.99978628549760353916393642728201778268679383408980961293318795467262504047489025814647026
          9
aflintc: [-0.99978628549760353916393642728201778268679383408980961293318795467262504047489025814647026
          9 +/- 8.82e-91]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.gamma1pm1(x))))
    fpm:  0.000602975730172117
    mpm:  0.000602975730172116323245926567256313392198083136830222347139995967012419575826370986455598002
    dpm:  0.000602975730172116323245926567256313392198083136830222347139995967012419575826370986455598002
    ipm: [0.000602975730172116323245926567256313392198083136830222347139995967012419575826370986455598001601306,
```

(continues on next page)

(continued from previous page)

```
          0.000602975730172116323245926567256313392198083136830222347139995967012419575826370986455598003161 12]
    gpm:  0.000602975730172116323245926567256313392198083136830222347139995967012419575826370986455598001 96
    apm: [0.000602975730172116323245926567256313392198083136830222347139995967012419575826370986455598000 +/- 7.03e-93]
cmath53:  0.000602975730172118
sflintc:  0.0006029759
dflintc:  0.000602975730172116
eflintc:  0.00060297573017211632338
qflintc:  0.000602975730172116323245926567256314
oflintc:  0.000602975730172116323245926567256313392198083136830222347139995967012419 58
mflintc:  0.000602975730172116323245926567256313392198083136830222347139995967012419575826370986455598003
aflintc: [0.000602975730172116323245926567256313392198083136830222347139995967012419575826370986455598000 +/- 7.13e-93]
```

3.11.3 Log-gamma function, $\log \Gamma(x)$

`ctx.lgamma(x)`

where `ctx` is `math53`, `mathc53`, `ctxboost`, `ctxflint`.

Returns the principal branch of the log-gamma function, $\log |\Gamma(x)|$ for $x \neq 0, -1, -2, \ldots$. If $x < 0$, the logarithmic form of the reflection formula is used.

See also: https://en.wikipedia.org/wiki/Gamma_function#Log-gamma_function

See also: https://mathworld.wolfram.com/LogGammaFunction.html

See also Wikipedia [1264], MathWorld [888], BoostMath [102], Ehrhardt [295] (3.5.1.5), Ehrhardt [295] (4.2.43), Flint [735], Flint [725], Mpmath [593].

Unlike $\log(\Gamma(z))$, which has infinitely many complex branch cuts, the principal log-gamma function only has a single branch cut along the negative half-axis. The principal branch continuously matches the asymptotic Stirling expansion

$$\log \Gamma(z) \sim \frac{\log(2\pi)}{2} + \left(z - \frac{1}{2}\right) \log(z) - z + O(z^{-1}).$$

The real parts of both functions agree, but their imaginary parts generally differ by $2n\pi$ for some $n \in \mathbb{Z}$. They coincide for $z \in \mathbb{R}, z > 0$.

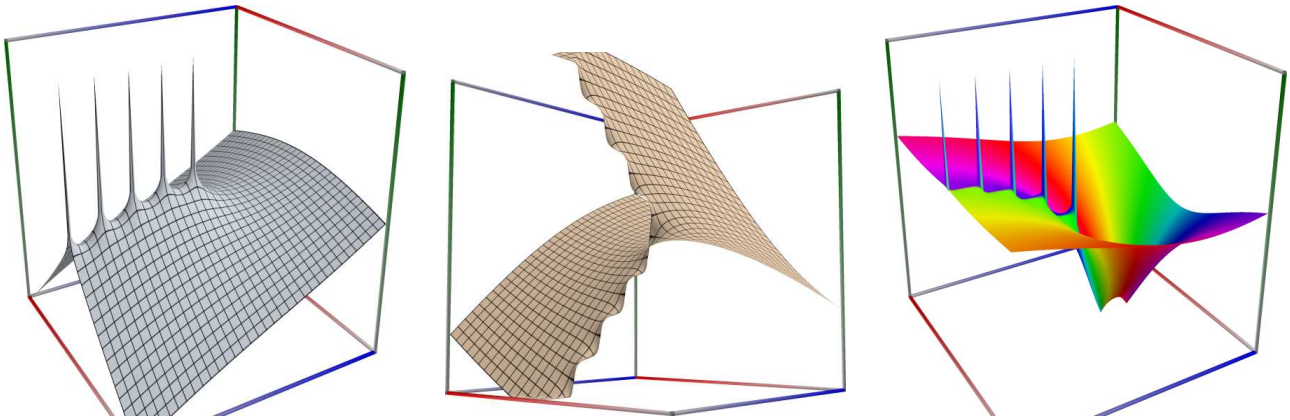

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \leq x \leq 6$ (blue axis), $-6 \leq y \leq 6$ (red axis), $-10 \leq z \leq 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.lgamma(x)))
    fpm:  3.32976416847522
    mpm:  3.32976416847522251301382136288572736135427513203730103056637335006816150627898231550309303 4
    dpm:  3.32976416847522251301382136288572736135427513203730103056637335006816150627898231550309303 4
    ipm: [3.32976416847522251301382136288572736135427513203730103056637335006816150627898231550309303 03395758,
          3.32976416847522251301382136288572736135427513203730103056637335006816150627898231550309303 03415394]
    gpm:  3.32976416847522251301382136288572736135427513203730103056637335006816150627898231550309309 30341
    apm: [3.32976416847522251301382136288572736135427513203730103056637335006816150627898231550309303 4 +/- 2.74e-90]
 math53:  3.32976416847522
  sreal:  3.329764
  dreal:  3.32976416847522
  ereal:  3.3297641684752251302
  qreal:  3.32976416847522513013821362885727
  oreal:  3.32976416847522513013821362885727361354275132037301030566373350068161 49
  mreal:  3.32976416847522513013821362885727361354275132037301030566373350068161506278982315503093034
 sflint:  3.329764
```

(continues on next page)

(continued from previous page)

```
 dflint:  3.32976416847522
 eflint:  3.32976416847522513
 qflint:  3.32976416847522513013821362885727
 oflint:  3.32976416847522513013821362885727361354275132037301030566373350068161506278982315503093034
 mflint:  3.32976416847522513013821362885727361354275132037301030566373350068161506278982315503093034
 aflint: [3.32976416847522513013821362885727361354275132037301030566373350068161506278982315503093034 +/- 6.22e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.lgamma(x)))
    fpm:  (-9.05523071772167, -14.1040586974261)
    mpm:  (-9.0552307177216674517575826536911902407953145460526, -14.104058697426106649080899992053417622448401423488)
cmath53:  (-9.05523071772167, -14.1040586974261)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.lgamma(x))))
    fpm:  -9.05523071772167
    mpm:  -9.055230717721667451757582653691190240795314546052650765595331993900487286857051786449255 29
    dpm:  -9.055230717721667451757582653691190240795314546052650765595331993900487286857051786449255 29
    ipm: [-9.055230717721667451757582653691190240795314546052650765595331993900487286857051786449255 2867355,
          -9.055230717721667451757582653691190240795314546052650765595331993900487286857051786449255 2847718]
    gpm:  -9.055230717721667451757582653691190240795314546052650765595331993900487286857051786449255 2907
    apm: [-9.055230717721667451757582653691190240795314546052650765595331993900487286857051786449255 3 +/- 3.64e-89]
cmath53:  -9.05523071772167
sflintc:  -9.05523
dflintc:  -9.05523071772167
eflintc:  -9.0552307177216674518
qflintc:  -9.055230717721667451757582653691 19
oflintc:  -9.055230717721667451757582653691190240795314546052650765595331993900487 3
mflintc:  -9.055230717721667451757582653691190240795314546052650765595331993900487286857051786449255 27
aflintc: [-9.055230717721667451757582653691190240795314546052650765595331993900487286857051786449255 3 +/- 5.86e-89]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.lgamma(x))))
    fpm:  -14.1040586974261
    mpm:  -14.104058697426106649080899992053417622448401423488158809011994167577387495992761092185 0821
    dpm:  -14.104058697426106649080899992053417622448401423488158809011994167577387495992761092185 0821
    ipm: [-14.104058697426106649080899992053417622448401423488158809011994167577387495992761092185 2099216,
          -14.104058697426106649080899992053417622448401423488158809011994167577387495992761092185 3325]
    gpm:  -14.104058697426106649080899992053417622448401423488158809011994167577387495992761092185 099
    apm: [-14.104058697426106649080899992053417622448401423488158809011994167577387495992761092185 0821 +/- 2.58e-89]
cmath53:  -14.1040586974261
sflintc:  -14.10406
dflintc:  -14.1040586974261
eflintc:  -14.104058697426106649
qflintc:  -14.104058697426106649080899920534
oflintc:  -14.104058697426106649080899992053417622448401423488158809011994167577387
mflintc:  -14.104058697426106649080899992053417622448401423488158809011994167577387495992761092185 0821
aflintc: [-14.104058697426106649080899992053417622448401423488158809011994167577387495992761092185 0821 +/- 7.22e-89]
```

3.11.4 Reciprocal Gamma function, $1/\Gamma(x)$

`ctx.rgamma(x)`

where `ctx` is `math53`, `mathc53`, `ctxboost`, `ctxflint`.

Returns the reciprocal of gamma function x, $1/\Gamma(x)$, which is an entire function with simple zeros at the points $x = 0$ and the negative integers.

See also Wikipedia [1263], MathWorld [890], Ehrhardt [295] (3.5.1.8), Ehrhardt [295] (4.2.51), Flint [735], Flint [725].

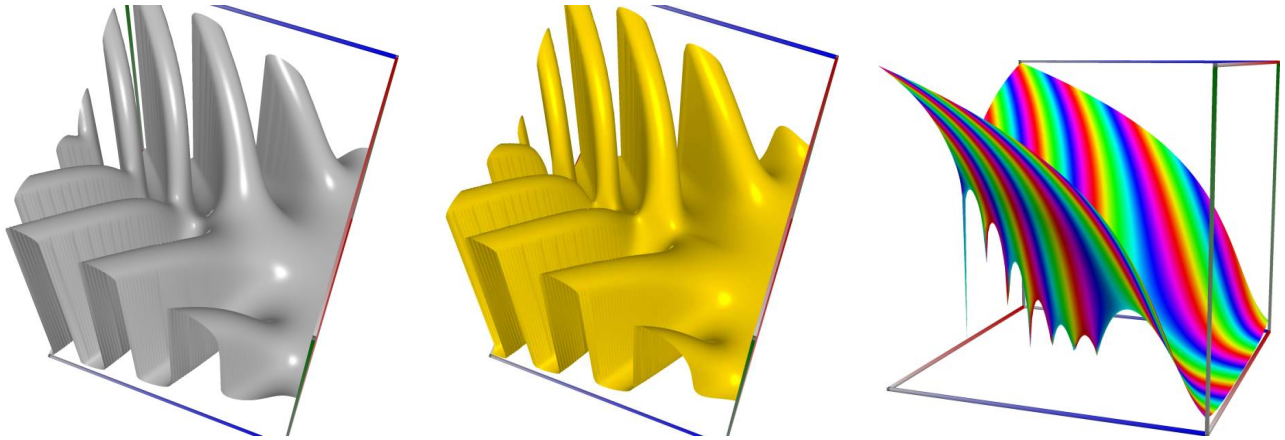

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.rgamma(x)))
    fpm:  14.0120239801757
    mpm:  14.012023980175758312993408472330900583855796984810430578639756969521277768905756512725997
    dpm:  14.012023980175758312993408472330900583855796984810430578639756969521277768905756512725997
    ipm: [14.012023980175758312993408472330900583855796984810430578639756969521277768905756512725997067468,
          14.012023980175758312993408472330900583855796984810430578639756969521277768905756512725997250087]
    gpm:  14.012023980175758312993408472330900583855796984810430578639756969521277768905756512725997238
    apm: [14.012023980175758312993408472330900583855796984810430578639756969521277768905756512725997 +/- 2.62e-88]
 math53:  14.0120239801757
  sreal:  14.01201
  dreal:  14.0120239801757
  ereal:  14.012023980175758299
  qreal:  14.01202398017575831299340847233 09
  oreal:  14.012023980175758312993408472330900583855796984810430578639756969521274
  mreal:  14.012023980175758312993408472330900583855796984810430578639756969521277768905756512725997 1
 sflint:  14.01201
 dflint:  14.0120239801757
 eflint:  14.012023980175758299
 qflint:  14.01202398017575831299340847233 09
 oflint:  14.012023980175758312993408472330900583855796984810430578639756969521276
 mflint:  14.012023980175758312993408472330900583855796984810430578639756969521277768905756512725997 1
 aflint: [14.012023980175758312993408472330900583855796984810430578639756969521277768905756512725997 +/- 2.30e-88]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.rgamma(x)))
    fpm:  (283.461141294632, 8558.51985168201)
```

(continues on next page)

(continued from previous page)

```
    mpm:  (283.461141294623737254949017462686597120033178944784082391633755439378413525979370530763724, 8558.519851682011179878236199041885696709644566222860438402096182458047485562348367887863017143
2)
cmath53:  (283.461141294625, 8558.51985168199)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.rgamma(x))))
    fpm:  283.461141294632
    mpm:  283.461141294623737254949017462686597120033178944784082391633755439378413525979370530763724
    dpm:  283.461141294623737254949017462686597120033178944784082391633755439378413525979370530763729
    ipm: [283.461141294623737254949017462686597120033178944784082391633755439378413525979370530763722893,
          283.461141294623737254949017462686597120033178944784082391633755439378413525979370530763748217]
    gpm:  283.461141294623737254949017462686597120033178944784082391633755439378413525979370530763724
    apm: [283.461141294623737254949017462686597120033178944784082391633755439378413525979370530763724 +/- 8.49e-86]
cmath53:  283.461141294625
sflintc:  283.4634
dflintc:  283.461141294632
eflintc:  283.46114129462373929
qflintc:  283.461141294623737254949017462694
oflintc:  283.461141294623737254949017462686597120033178944784082391633755439378413525979370530763747
mflintc:  283.461141294623737254949017462686597120033178944784082391633755439378413525979370530763747
aflintc: [283.461141294623737254949017462686597120033178944784082391633755439378413525979370530763724 +/- 7.74e-86]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.rgamma(x))))
    fpm:  8558.51985168201
    mpm:  8558.519851682011179878236199041885696709644566222860438402096182458047485562348367887863017143
2
    dpm:  8558.519851682011179878236199041885696709644566222860438402096182458047485562348367887863017143
2
    ipm: [8558.519851682011179878236199041885696709644566222860438402096182458047485562348367887863017143
2,
          8558.519851682011179878236199041885696709644566222860438402096182458047485562348367887863069423
1]
    gpm:  8558.519851682011179878236199041885696709644566222860438402096182458047485562348367887863049
3
    apm: [8558.519851682011179878236199041885696709644566222860438402096182458047485562348367887863049
3 +/- 6.83e-86]
cmath53:  8558.51985168199
sflintc:  8558.519
dflintc:  8558.51985168201
eflintc:  8558.5198516820111783
qflintc:  8558.519851682011179878236199041885
oflintc:  8558.519851682011179878236199041885696709644566222860438402096182458047485562348367887863017
mflintc:  8558.519851682011179878236199041885696709644566222860438402096182458047485562348367887863017
aflintc: [8558.519851682011179878236199041885696709644566222860438402096182458047485562348367887863049
3 +/- 6.21e-86]
```

3.11.5 Factorial, $x!$

`ctx.factorial(x)`

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns $x!$, the factorial of x. For integers $x \geq 0$, we have $x! = 1 \cdot 2 \cdots (x-1) \cdot x$ and for real or complex x we have $x! = \Gamma(x+1)$.

See also Wikipedia [1251], MathWorld [878], BoostMath [99], Ehrhardt [295] (3.5.4.1), Flint [735], Flint [725], Mpmath [585].

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.factorial(x)))
    fpm:  -0.363973113892433
    mpm:  -0.3639731138924320267632962202766614480774380145370666922283543598221982135706103068169816 92
    dpm:  -0.3639731138924320267632962202766614480774380145370666922283543598221982135706103068169816 93
    ipm: [-0.3639731138924320267632962202766614480774380145370666922283543598221982135706103068169816 9673394,
          -0.3639731138924320267632962202766614480774380145370666922283543598221982135706103068169816 9920703]
    gpm:  -0.3639731138924320267632962202766614480774380145370666922283543598221982135706103068169816 9238
    apm: [-0.3639731138924320267632962202766614480774380145370666922283543598221982135706103068169817 0 +/- 8.25e-90]
 math53:  -0.363973113892433
  sreal:  -0.3639735
  dreal:  -0.363973113892433
  ereal:  -0.36397311389243202712
  qreal:  -0.363973113892432026763296220276663
  oreal:  -0.3639731138924320267632962202766614480774380145370666922283543598221983
  mreal:  -0.3639731138924320267632962202766614480774380145370666922283543598221982135706103068169816 96
 sflint:  -0.3639735
 dflint:  -0.363973113892432
 eflint:  -0.36397311389243202712
 qflint:  -0.363973113892432026763296220276663
 oflint:  -0.3639731138924320267632962202766614480774380145370666922283543598221982 19821
 mflint:  -0.3639731138924320267632962202766614480774380145370666922283543598221982135706103068169816 96
 aflint: [-0.3639731138924320267632962202766614480774380145370666922283543598221982135706103068169817 0 +/- 7.53e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.factorial(x)))
    fpm:  (0.00021371450239646, 0.000602975730172117)
    mpm:  (0.000213714502396460836063572717982217313206165910190387066812045327374959525109741853529730588, 0.000602975730172116323245926567256313392198 1)
cmath53:  (0.000213714502396461, 0.000602975730172118)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.factorial(x))))
    fpm:  0.00021371450239646
    mpm:  0.000213714502396460836063572717982217313206165910190387066812045327374959525109741853529730588
    dpm:  0.000213714502396460836063572717982217313206165910190387066812045327374959525109741853529730588
    ipm: [0.000213714502396460836063572717982217313206165910190387066812045327374959525109741853529730586 72883,
          0.000213714502396460836063572717982217313206165910190387066812045327374959525109741853529730588 73633]
    gpm:  0.000213714502396460836063572717982217313206165910190387066812045327374959525109741853529730587 99
    apm: [0.000213714502396460836063572717982217313206165910190387066812045327374959525109741853529730590 59 +/- 6.84e-93]
cmath53:  0.000213714502396461
sflintc:  0.0002137144
dflintc:  0.000213714502396461
eflintc:  0.00021371450239646083596
qflintc:  0.000213714502396460836063572717982217
oflintc:  0.000213714502396460836063572717982217313206165910190387066812045327374959525
mflintc:  0.000213714502396460836063572717982217313206165910190387066812045327374959525109741853529730587
aflintc: [0.000213714502396460836063572717982217313206165910190387066812045327374959525109741853529730590 59 +/- 6.31e-93]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.factorial(x))))
    fpm:  0.000602975730172117
    mpm:  0.000602975730172116323245926567256313392198083136830222347139995967012419575826370986455598002
    dpm:  0.000602975730172116323245926567256313392198083136830222347139995967012419575826370986455598002
    ipm: [0.000602975730172116323245926567256313392198083136830222347139995967012419575826370986455598000160306,
          0.000602975730172116323245926567256313392198083136830222347139995967012419575826370986455598000316112]
    gpm:  0.000602975730172116323245926567256313392198083136830222347139995967012419575826370986455598000196
    apm: [0.000602975730172116323245926567256313392198083136830222347139995967012419575826370986455598000 +/- 7.03e-93]
cmath53:  0.000602975730172118
sflintc:  0.0006029759
dflintc:  0.000602975730172116
eflintc:  0.00060297573017211632338
qflintc:  0.000602975730172116323245926567256314
oflintc:  0.000602975730172116323245926567256313392198083136830222347139995967012419575826370986455598003
mflintc:  0.000602975730172116323245926567256313392198083136830222347139995967012419575826370986455598003
aflintc: [0.000602975730172116323245926567256313392198083136830222347139995967012419575826370986455598000 +/- 7.13e-93]
```

3.11.6 Double factorial, $x!!$

`ctx.doublefactorial(x)`

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns $x!!$, the double factorial of x.

$$n!! = \begin{cases} 1 \cdot 3 \cdot 5 \cdots n & \text{if } n \text{ is odd.} \\ 2 \cdot 4 \cdot 6 \cdots n & \text{if } n \text{ is even.} \end{cases}$$

and more generally by

$$x!! = 2^{x/2} \left(\frac{\pi}{2}\right)^{(\cos(\pi x)-1)/4} \Gamma\left(\frac{x}{2}+1\right).$$

See also Wikipedia [1271], MathWorld [914], BoostMath [118], Ehrhardt [295] (3.5.4.2), Flint [735], Flint [725], Mpmath [605].

See also http://dlmf.nist.gov/5.4.E2

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; dps = 90
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.doublefactorial(x)))
    fpm:  0.316281708455297
    mpm:  0.31628170845529728543191383449634925219829622158180852831486103181281502472069092162088668 3
    dpm:  0.31628170845529728543191383449634925219829622158180852831486103181281502472069092162088668 3
    ipm: [0.31628170845529728543191383449634925219829622158180852831486103181281502472069092162088668 2801,
          0.31628170845529728543191383449634925219829622158180852831486103181281502472069092162088668 408964]
    gpm:  0.31628170845529728543191383449634925219829622158180852831486103181281502472069092162088668 335
    apm: [0.31628170845529728543191383449634925219829622158180852831486103181281502472069092162088668 +/- 4.61e-90]
 math53:  0.316281708455297
  sreal:  0.3162817
  dreal:  0.316281708455297
  ereal:  0.31628170845529728544
  qreal:  0.31628170845529728543191383449634 9
  oreal:  0.31628170845529728543191383449634925219829622158180852831486103181281497
  mreal:  0.31628170845529728543191383449634925219829622158180852831486103181281502472069092162088668 3
 sflint:  0.3162817
 dflint:  0.316281708455297
 eflint:  0.31628170845529728544
 qflint:  0.31628170845529728543191383449634 9
 oflint:  0.31628170845529728543191383449634925219829622158180852831486103181281502
 mflint:  0.31628170845529728543191383449634925219829622158180852831486103181281502472069092162088668 3
 aflint: [0.31628170845529728543191383449634925219829622158180852831486103181281502472069092162088668 +/- 5.78e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.sin(x)))
    fpm:  (-2.30495448035535E-15, -1.21594414837312E-14)
    mpm:  (-2.3049544803557659726704851891897816147 7e-15, -1.2159441483731240190696621832436185133 7e-14)
cmath53:  (-2.30495448035482E-15, -1.21594414837344E-14)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlistcplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.sin(x))))
    fpm:  -2.30495448035535E-15
    mpm:  -0.000000000000000230495448035576597267048518918978161477864266896255458729896215327665844390918515252445016
    dpm:  -2.304954480355765972670485189189781614778642668962554587298962153276658443909185152524449 2E-15
```

(continues on next page)

(continued from previous page)

```
    ipm: [-0.
↪0000000000000023049544803557659726704851891897816147786426689625545872989621532766584439091851525244524884019,
          -0.
↪0000000000000023049544803557659726704851891897816147786426689625545872989621532766584439091851525244477340934]
    gpm:  -2.3049544803557659726704851891897816147786426689625545872989621532766584439091851525244501601e-15
    apm: [-2.3049544803557659726704851891897816147786426689625545872989621532766584439091851525244445e-15 +/- 3.49e-102]
cmath53:  -2.30495448035482E-15
sflintc:  -2.304842E-15
dflintc:  -2.30495448035577E-15
eflintc:  -2.3049544803557658703e-15
qflintc:  -2.304954480355765972670485189189 42e-15
oflintc:  -2.3049544803557659726704851891897816147786426689625545872989621532766585e-15
mflintc:  -2.3049544803557659726704851891897816147786426689625545872989621532766584439091851525244449E-15
aflintc: [-2.3049544803557659726704851891897816147786426689625545872989621532766584439091851525244445e-15 +/- 5.96e-102]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlistcplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.sin(x))))
    fpm:  -1.21594414837312E-14
    mpm:  -0.000000000000012159441483731240190696621832436185133976235625266428692363475576069545637866441179489288 2
    dpm:  -1.21594414837312401906966218324361851339762356252664286923634755760695456378664411794892882E-14
    ipm: [-0.
↪0000000000000121594414837312401906966218324361851339762356252664286923634755760695456378664411794892903824 79,
          -0.
↪0000000000000121594414837312401906966218324361851339762356252664286923634755760695456378664411794892855810 81]
    gpm:  -1.21594414837312401906966218324361851339762356252664286923634755760695456378664411794892882 01e-14
    apm: [-1.21594414837312401906966218324361851339762356252664286923634755760695456378664411794892 9e-14 +/- 4.21e-102]
cmath53:  -1.21594414837344E-14
sflintc:  -1.215943E-14
dflintc:  -1.21594414837312E-14
eflintc:  -1.2159441483731240179e-14
qflintc:  -1.215944148373124019069662183 4361e-14
oflintc:  -1.21594414837312401906966218324361851339762356252664286923634755760695 6e-14
mflintc:  -1.21594414837312401906966218324361851339762356252664286923634755760695456378664411794892881E-14
aflintc: [-1.21594414837312401906966218324361851339762356252664286923634755760695456378664411794892 9e-14 +/- 5.44e-102]
```

3.11.7 Rising factorial $a^{\overline{n}} = (a)_n$

`ctx.rising_factorial(a, n)`

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns the rising factorial , $a^{\overline{n}} = (a)_n = a(a+1)\cdots(a+n-1) = \dfrac{\Gamma(a+n)}{\Gamma(a)}$, where the rightmost expression is valid for nonintegral n. By convention $(a)_0 = 1$. Note that in Wikipedia [1252], the Pochhammer symbol $(a)_n$ is used for the falling factorial (as is common in combinatorics), whereas in this manual we follow the convention in MathWorld [891], Abramowitz and Stegun. [4], BoostMath [110], Ehrhardt [295], and the literature of special functions (in particular the hypergeometric functions), using it for the rising factorial.

If a or $a+n$ are negative integers or zero special care must be taken: If only a is a negative integer then the result is zero. If $a+n$ is also a negative integer then the Pochhammer symbol is computed from the limiting form of the Γ reflection formula $(a)_n = (-1)^n \dfrac{\Gamma(1-a)}{\Gamma(1-a-n)}$, and otherwise the function is undefined.

See also Wikipedia [1252], MathWorld [891], BoostMath [110], Ehrhardt [295] (3.5.4.6), Flint [735], Flint [725], Mpmath [597].

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; y = 2.7; gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.rising_factorial(x, y)))
    fpm:  120.899008316202
    mpm:  120.899008316201724599416488227961568710386966744069530687218675880434452368462008836468571
    dpm:  120.899008316201724599416488227961568710386966744069530687218675880434452368462008836468571
    ipm: [120.899008316201724599416488227961568710386966744069530687218675880434452368462008836468571 0901,
          120.899008316201724599416488227961568710386966744069530687218675880434452368462008836468571 6559]
    gpm:  120.899008316201724599416488227961568710386966744069530687218675880434452368462008836468571 34
    apm: [120.899008316201724599416488227961568710386966744069530687218675880434452368462008836468571 +/- 2.14e-87]
 math53:  120.899008316202
  sreal:  120.8991
  dreal:  120.899008316202
  ereal:  120.89900831620172465
  qreal:  120.899008316201724599416488227962
  oreal:  120.899008316201724599416488227961568710386966744069530687218675880434447
  mreal:  120.899008316201724599416488227961568710386966744069530687218675880434452368462008836468572
 sflint:  120.899
 dflint:  120.899008316202
 eflint:  120.8990083162017246
 qflint:  120.899008316201724599416488227962
 oflint:  120.899008316201724599416488227961568710386966744069530687218675880434452368462008836468571
 mflint:  120.899008316201724599416488227961568710386966744069530687218675880434452368462008836468571
 aflint: [120.899008316201724599416488227961568710386966744069530687218675880434452368462008836468571 +/- 2.83e-87]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  y = 2.7+3j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.rising_factorial(x, y)))
    fpm:  (0.0489462045888396, -0.0468425827410336)
    mpm:  (0.048946204588839556389742465998738741534116405303695, -0.
↪04684258274103358538051195657982989873855253022140 6)
cmath53:  (0.0489462045888396, -0.0468425827410332)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  y = 2.7+3j; gui.setdps(50)
>>> for ctx in gui.ctxlist_noboost_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.rising_factorial(x,␣
↪y))))
    fpm:  0.0489462045888396
```

(continues on next page)

(continued from previous page)

```
    mpm:  0.048946204588839556389742465998738741534116405303694267310594518021918519499474697278317618 39079,
          0.048946204588839556389742465998738741534116405303694267310594518021918519499474697278317619111813]
    gpm:  0.048946204588839556389742465998738741534116405303694267310594518021918519499474697278317618698
    apm: [0.048946204588839556389742465998738741534116405303694267310594518021918519499474697278317762 +/- 7.32e-90]
cmath53:  0.0489462045888396
sflintc:  0.04894621
dflintc:  0.0489462045888396
eflintc:  0.048946204588839556395
qflintc:  0.0489462045888395563897424659987388
oflintc:  0.048946204588839556389742465998738741534116405303694267310594518021918 52
mflintc:  0.048946204588839556389742465998738741534116405303694267310594518021918519499474697278317618 7
aflintc: [0.048946204588839556389742465998738741534116405303694267310594518021918519499474697278317762 +/- 6.15e-90]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  y = 2.7+3j; gui.setdps(50)
>>> for ctx in gui.ctxlist_noboost_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.rising_factorial(x,␣
↪y))))
    fpm:  -0.0468425827410336
    mpm:  -0.046842582741033585380511956579829898738552530221406257303344887496844988543748068357708578482843,
          -0.046842582741033585380511956579829898738552530221406257303344887496844988543748068357708578776182]
    dpm:  -0.046842582741033585380511956579829898738552530221406257303344887496844988543748068357708578482843
    ipm: [-0.046842582741033585380511956579829898738552530221406257303344887496844988543748068357708578482843,
          -0.046842582741033585380511956579829898738552530221406257303344887496844988543748068357708578776182]
    gpm:  -0.04684258274103358538051195657982989873855253022140625730334488749684498854374806835770858 +/- 7.85e-90]
cmath53:  -0.0468425827410332
sflintc:  -0.04684259
dflintc:  -0.0468425827410336
eflintc:  -0.04684258274103358538 2
qflintc:  -0.0468425827410335853805119565798299
oflintc:  -0.046842582741033585380511956579829898738552530221406257303344887496844989
mflintc:  -0.046842582741033585380511956579829898738552530221406257303344887496844988543748068357708578482843
aflintc: [-0.04684258274103358538051195657982989873855253022140625730334488749684498854374806835770858 +/- 6.76e-90]
```

3.11.8 Falling factorial, $(a)^{\underline{n}} = (a-n+1)^{\overline{n}}$

`ctx.falling_factorial`(a, n)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns the falling factorial of a and n, $a^{\underline{n}} = a(a-1)\cdots(a-n+1) = \dfrac{\Gamma(a+1)}{\Gamma(a+1-n)}$, where the rightmost expression is valid for nonintegral n.

The falling factorial $(a)^{\underline{n}}$ is related to the rising factorial $(a)^{\overline{n}}$ by $(a)^{\underline{n}} = (a-n+1)^{\overline{n}}$.

See also Wikipedia [1252], MathWorld [879], BoostMath [100], Mpmath [586].

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; y = 2.7; gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.falling_factorial(x, y)))
    fpm:  47.7833211362326
    mpm:  47.783321136232635542711703988793840799415259133777043174313332799656092015675680239756147 4
    dpm:  47.783321136232635542711703988793840799415259133777043174313332799656092015675680239756147 4
    ipm: [47.783321136232635542711703988793840799415259133777043174313332799656092015675680239756147303372,
          47.783321136232635542711703988793840799415259133777043174313332799656092015675680239756147491881]
    gpm:  47.783321136232635542711703988793840799415259133777043174313332799656092015675680239756147398
    apm: [47.783321136232635542711703988793840799415259133777043174313332799656092015675680239756147 +/- 5.71e-88]
 math53:  47.7833211362326
  sreal:  47.78332
  dreal:  47.7833211362326
  ereal:  47.783321136232635547
  qreal:  47.783321136232635542711703988793 8
  oreal:  47.783321136232635542711703988793840799415259133777043174313332799656076
  mreal:  47.783321136232635542711703988793840799415259133777043174313332799656092015675680239756147 4
 sflint:  47.78332
 dflint:  47.7833211362326
 eflint:  47.783321136232635541
 qflint:  47.783321136232635542711703988793 8
 oflint:  47.783321136232635542711703988793840799415259133777043174313332799656092
 mflint:  47.783321136232635542711703988793840799415259133777043174313332799656092015675680239756147 4
 aflint: [47.783321136232635542711703988793840799415259133777043174313332799656092015675680239756147 +/- 7.23e-88]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = 5.1+2j;  y = 2.7+3j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.falling_factorial(x, y)))
    fpm:  (-5.3763796978689, -39.491613061017)
    mpm:  (-5.37637969786888734898680176113641959105840358418887, -39.49161306101701259442384411274543294237515523 2)
cmath53:  (-5.37637969786898, -39.4916130610169)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = 5.1+2j;  y = 2.7+3j; gui.setdps(50)
>>> for ctx in gui.ctxlist_noboost_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.falling_factorial(x,␣
↪y))))
    fpm:  -5.3763796978689
    mpm:  -5.37637969786888734898680176113641959105840358418887
    dpm:  -5.37637969786888734898680176113641959105840358418885
    ipm: [-5.37637969786888734898680176113641959105840358418938029 1,
          -5.37637969786888734898680176113641959105840358418757350 2]
    gpm:  -5.37637969786888734898680176113641959105840358418869 6
    apm: [-5.37637969786888734898680176113641959105840358419 +/- 9.21e-48]
cmath53:  -5.37637969786898
sflintc:  -5.376383
dflintc:  -5.37637969786889
```

(continues on next page)

(continued from previous page)

```
eflintc:  -5.3763796978688873519
qflintc:  -5.37637969786888734898680176113643
oflintc:  -5.376379697868887348986801761136419591058403584188530979389781991662899 9
mflintc:  -5.37637969786888734898680176113641959105840358418853097938978199166289 99
aflintc: [-5.37637969786888734898680176113641959105840358 42 +/- 2.90e-47]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.falling_factorial(x,␣
↪y))))
    fpm:  -39.491613061017
    mpm:  -39.491613061017012594423844112745432942375155235200235417515364599183955672542637070487934 9339
    dpm:  -39.491613061017012594423844112745432942375155235200235417515364599183955672542637070487934 9339
    ipm: [-39.491613061017012594423844112745432942375155235200235417515364599183955672542637070487934 116135,
          -39.491613061017012594423844112745432942375155235200235417515364599183955672542637070487933 754825]
    gpm:  -39.491613061017012594423844112745432942375155235200235417515364599183955672542637070487933 896
    apm: [-39.491613061017012594423844112745432942375155235200235417515364599183955672542637070487934 +/- 8.27e-88]
cmath53:  -39.4916130610169
sflintc:  -39.49161
dflintc:  -39.491613061017
eflintc:  -39.491613061017012593
qflintc:  -39.4916130610170125944238441127454
oflintc:  -39.491613061017012594423844112745432942375155235200235417515364599183956
mflintc:  -39.491613061017012594423844112745432942375155235200235417515364599183955672542637070487934 9339
aflintc: [-39.491613061017012594423844112745432942375155235200235417515364599183955672542637070487 93 +/- 4.74e-87]
```

3.11.9 Ratio of gamma functions, $\Gamma(a)/\Gamma(b)$

`ctx.`**`gamma_ratio`**(a, b)

where `ctx` is `math53`, `ctxcpp`, `ctxboost` or `ctxflint`.

This functions returns the ratio of gamma functions in the form

$$\frac{\Gamma(a)}{\Gamma(b)}$$

See also BoostMath [126], Ehrhardt [295] (3.5.5).

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; y = 2.7; gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.gamma_ratio(x, y)))
    fpm:  18.0824818285219
    mpm:  18.0824818285219026450565175677288907759397444313260124695357354317399974133514373064847393 5
    dpm:  18.0824818285219026450565175677288907759397444313260124695357354317399974133514373064847393 5
    ipm: [18.0824818285219026450565175677288907759397444313260124695357354317399974133514373064847393 436768,
          18.0824818285219026450565175677288907759397444313260124695357354317399974133514373064847393 479968]
    gpm:  18.0824818285219026450565175677288907759397444313260124695357354317399974133514373064847393 476
    apm: [18.0824818285219026450565175677288907759397444313260124695357354317399974133514373064847393 4 +/- 9.84e-89]
 math53:  18.0824818285219
  sreal:  18.08248
  dreal:  18.0824818285219
  ereal:  18.082481828521926447
  qreal:  18.0824818285219026450565175677288 9
  oreal:  18.0824818285219026450565175677288907759397444313260124695357354317399978
  mreal:  18.0824818285219026450565175677288907759397444313260124695357354317399974133514373064847394 8
 sflint:  18.08248
 dflint:  18.0824818285219
 eflint:  18.082481828521926448
 qflint:  18.0824818285219026450565175677288 9
```

(continues on next page)

(continued from previous page)

```
 oflint:  18.08248182852192645056517567728890775939744431326012469535735431739997413351437306484739 34
 mflint:  18.08248182852192645056517567728890775939744431326012469535735431739997413351437306484739 34
 aflint: [18.08248182852192645056517567728890775939744431326012469535735431739997413351437306484739 3 +/- 5.17e-88]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  y = 2.7+3j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.gamma_ratio(x, y)))
    fpm:  (-6.27348220373128E-05, 0.000387174135829838)
    mpm:  (-0.000062734822037312479940775005779390181087497883640862, 0.
↪0003871741358298376622735563511708533479162288714098)
cmath53:  (-6.27348220373127E-05, 0.000387174135829839)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  y = 2.7+3j; gui.setdps(50)
>>> for ctx in gui.ctxlist_noboost_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.gamma_ratio(x, y))))
    fpm:  -6.27348220373128E-05
    mpm:  -0.000062734822037312479940775005779390181087497883640857449277827331617832466045913114840402843
    dpm:  -0.000062734822037312479940775005779390181087497883640857449277827331617832466045913114840402843 2
    ipm: [-0.000062734822037312479940775005779390181087497883640857449277827331617832466045913114840402844245451,
          -0.000062734822037312479940775005779390181087497883640857449277827331617832466045913114840402842657427]
    gpm:  -6.27348220373124799407750057793905e-05
    apm: [-6.27348220373124799407750057793905e-05 +/- 8.88e-93]
cmath53:  -6.27348220373127E-05
sflintc:  -6.273491E-05
dflintc:  -6.27348220373125E-05
eflintc:  -6.27348220373124800 26e-05
qflintc:  -6.27348220373124799407750057793905e-05
oflintc:  -6.27348220373124799407750057793905 1810874978836408574492778273316178324660459131148404028439E-05
mflintc:  -6.27348220373124799407750057793905 1810874978836408574492778273316178324660459131148404028439E-05
aflintc: [-6.27348220373124799407750057793905 1810874978836408574492778273316178324660459131148404028439E-05 +/- 8.58e-93]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  y = 2.7+3j; gui.setdps(90)
>>> ffor ctx in gui.ctxlist_noboost_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.gamma_ratio(x, y))))
    fpm:  0.000387174135829838
    mpm:  0.000387174135829838 3766227355635117085334791622887140980228422317526724071626724397076895164200 6
    dpm:  0.000387174135829838 3766227355635117085334791622887140980228422317526724071626724397076895164200 6
    ipm: [0.000387174135829838 3766227355635117085334791622887140980228422317526724071626724397076895164200492534,
          0.000387174135829838 3766227355635117085334791622887140980228422317526724071626724397076895164200714258]
    gpm:  0.000387174135829838 3766227355635117085334791622887140980228422317526724071626724397076895164200 6
    apm: [0.000387174135829838 3766227355635117085334791622887140980228422317526724071626724397076895164201 +/- 8.45e-93]
cmath53:  0.000387174135829839
sflintc:  0.0003871742
dflintc:  0.000387174135829838
eflintc:  0.000387174135829837 66229
qflintc:  0.000387174135829837 6622735563511708 53
oflintc:  0.000387174135829837 6622735563511708533479162288714098022842231752672407162672439707689516420 0627
mflintc:  0.000387174135829837 6622735563511708533479162288714098022842231752672407162672439707689516420 0 6
aflintc: [0.000387174135829837 6622735563511708533479162288714098022842231752672407162672439707689516420 1 +/- 9.28e-93]
```

3.11.10 Gamma-delta ratio, $\Gamma(a)/\Gamma(a+\delta)$

`ctx.gamma_delta_ratio`(x, *delta*)

where `ctx` is `math53`, `ctxcpp`, `ctxboost` or `ctxflint`.

Returns $\dfrac{\Gamma(x)}{\Gamma(x+d)}$, accurate also for $|d| \ll |x|$.

See also BoostMath [126], Ehrhardt [295] (3.5.5).

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; y = 2.7; gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.gamma_delta_ratio(x, y)))
    fpm:  0.00827136643986839
    mpm:  0.008271366439868387232092757947858069133839777991591649149027259877364870569365302678775758O7
    dpm:  0.008271366439868387232092757947858069133839777991591649149027259877364870569365302678775758O6
    ipm: [0.008271366439868387232092757947858069133839777991591649149027259877364870569365302678775758O355792,
          0.008271366439868387232092757947858069133839777991591649149027259877364870569365302678775758O835195]
    gpm:  0.008271366439868387232092757947858069133839777991591649149027259877364870569365302678775758O663
    apm: [0.008271366439868387232092757947858069133839777991591649149027259877364870569365302678775757581 +/- 9.06e-92]
 math53:  0.00827136643986839
  sreal:  0.008271366
  dreal:  0.00827136643986838
  ereal:  0.0082713664398683872322
  qreal:  0.008271366439868387232092757947858O7
  oreal:  0.008271366439868387232092757947858069133839777991591649149027259877364870707
  mreal:  0.008271366439868387232092757947858069133839777991591649149027259877364870569365302678775758O7
 sflint:  0.008271366
 dflint:  0.00827136643986839
 eflint:  0.0082713664398683872314
 qflint:  0.008271366439868387232092757947858O7
 oflint:  0.008271366439868387232092757947858069133839777991591649149027259877364870706
 mflint:  0.008271366439868387232092757947858069133839777991591649149027259877364870569365302678775758O5
 aflint: [0.008271366439868387232092757947858069133839777991591649149027259877364870569365302678775758 +/- 2.05e-91]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  y = 2.7+3j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.sin(x)))
    fpm:  (10.663757542211, 10.2054479851383)
    mpm:  (10.663757542211044414099783727213501514073115558581, 10.205447985138343518504195559625582938195050857 5)
cmath53:  (10.6637575422111, 10.2054479851383)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  y = 2.7+3j; gui.setdps(90)
>>> for ctx in gui.ctxlistcplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.sin(x))))
    fpm:  10.663757542211
    mpm:  10.663757542211044414099783727213501514073115558581102342780115299490379455618741003587657 1
    dpm:  10.663757542211044414099783727213501514073115558581102342780115299490379455618741003587657 1
    ipm: [10.663757542211044414099783727213501514073115558581102342780115299490379455618741003587656945476,
          10.663757542211044414099783727213501514073115558581102342780115299490379455618741003587657183076]
    gpm:  10.663757542211044414099783727213501514073115558581102342780115299490379455618741003587657101
    apm: [10.663757542211044414099783727213501514073115558581102342780115299490379455618741003587 66 +/- 4.90e-87]
cmath53:  10.6637575422111
sflintc:  10.66376
dflintc:  10.663757542211
eflintc:  10.663757542211044414
qflintc:  10.663757542211044414099783727213 5
oflintc:  10.663757542211044414099783727213501514073115558581102342780115299490379
mflintc:  10.663757542211044414099783727213501514073115558581102342780115299490379455618741003587657 1
aflintc: [10.663757542211044414099783727213501514073115558581102342780115299490379455618741003587 66 +/- 4.57e-87]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  y = 2.7+3j; gui.setdps(90)
>>> for ctx in gui.ctxlistcplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.sin(x))))
    fpm:  10.2054479851383
```

(continues on next page)

(continued from previous page)

```
    mpm:  10.205447985138343518504195559625582938195050857499553092690240978800995202992225567351561
    dpm:  10.205447985138343518504195559625582938195050857499553092690240978800995202992225567351561
    ipm: [10.205447985138343518504195559625582938195050857499553092690240978800995202992225567351560865852,
          10.205447985138343518504195559625582938195050857499553092690240978800995202992225567351561101489]
    gpm:  10.205447985138343518504195559625582938195050857499553092690240978800995202992225567351560999
    apm: [10.205447985138343518504195559625582938195050857499553092690240978800995202992225567351561 +/- 2.96e-87]
cmath53:  10.2054479851383
sflintc:  10.20545
dflintc:  10.2054479851383
eflintc:  10.205447985138343518
qflintc:  10.2054479851383435185041955596256
oflintc:  10.205447985138343518504195559625582938195050857499553092690240978800995
mflintc:  10.205447985138343518504195559625582938195050857499553092690240978800995202992225567351561
aflintc: [10.205447985138343518504195559625582938195050857499553092690240978800995202992225567351561 +/- 2.59e-87]
```

3.11.11 Beta function, $B(a,b) = \Gamma(a)\Gamma(b)/\Gamma(a+b)$

`ctx.beta(`a, b`)`

where `ctx` is `math53`, `ctxcpp`, `ctxboost` or `ctxflint`.

Returns the beta function $B(x,y) = \dfrac{\Gamma(x)\Gamma(y)}{\Gamma(x+y)} = \displaystyle\int_0^1 t^{x-1}(1-t)^{y-1}\ \mathrm{d}t$.

See also Wikipedia [1247], MathWorld [876], NIST [21], BoostMath [95], Ehrhardt [295] (3.5.3.1), Mpmath [583].

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; y = 2.7; gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.beta(x, y)))
    fpm:  0.0127766626655083
    mpm:  0.012776662665508314141848766608352856083880284166820891815063176097154195124612074978772910 3
    dpm:  0.012776662665508314141848766608352856083880284166820891815063176097154195124612074978772910 3
    ipm: [0.012776662665508314141848766608352856083880284166820891815063176097154195124612074978772910302705,
          0.012776662665508314141848766608352856083880284166820891815063176097154195124612074978772910038708]
    gpm:  0.012776662665508314141848766608352856083880284166820891815063176097154195124612074978772910353
    apm: [0.012776662665508314141848766608352856083880284166820891815063176097154195124612074978772910 +/- 4.59e-91]
 math53:  0.0127766626655083
  sreal:  0.01277666
  dreal:  0.0127766626655083
  ereal:  0.012776662665508314143
  qreal:  0.012776662665508314141848766608352 8
  oreal:  0.012776662665508314141848766608352856083880284166820891815063176097154195
  mreal:  0.012776662665508314141848766608352856083880284166820891815063176097154195124612074978772911 4
 sflint:  0.01277666
 dflint:  0.0127766626655083
 eflint:  0.012776662665508314141
 qflint:  0.012776662665508314141848766608352 9
 oflint:  0.012776662665508314141848766608352856083880284166820891815063176097154195
 mflint:  0.012776662665508314141848766608352856083880284166820891815063176097154195124612074978772910 4
 aflint: [0.012776662665508314141848766608352856083880284166820891815063176097154195124612074978772910 +/- 5.86e-91]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  y = 2.7+3j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.beta(x, y)))
    fpm:  (-3.53563411842751, -2.610038887387)
    mpm:  (-3.5356341184275088609197729624354523180133958679002, -2.6100388873869972001101912140810135972614859557243)
cmath53:  (-3.53563411842753, -2.61003888738699)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  y = 2.7+3j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.beta(x, y))))
    fpm:  -3.53563411842751
    mpm:  -3.535634118427508860919772962435452318013395867900180124366481911502473068089025360804077 28
    dpm:  -3.535634118427508860919772962435452318013395867900180124366481911502473068089025360804077 28
    ipm: [-3.535634118427508860919772962435452318013395867900180124366481911502473068089025360804077 3207335,
          -3.535634118427508860919772962435452318013395867900180124366481911502473068089025360804077 2971]
    gpm:  -3.535634118427508860919772962435452318013395867900180124366481911502473068089025360804077 28
    apm: [-3.535634118427508860919772962435452318013395867900180124366481911502473068089025360804077 +/- 9.28e-88]
cmath53:  -3.53563411842753
sflintc:  -3.535634
dflintc:  -3.53563411842751
eflintc:  -3.5356341184275088608
qflintc:  -3.535634118427508860919772962435 5
oflintc:  -3.535634118427508860919772962435452318013395867900180124366481911502473
mflintc:  -3.535634118427508860919772962435452318013395867900180124366481911502473068089025360804077 27
aflintc: [-3.535634118427508860919772962435452318013395867900180124366481911502473068089025360804077 +/- 5.48e-88]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  y = 2.7+3j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.beta(x, y))))
    fpm:  -2.610038887387
    mpm:  -2.61003888738699720011019121408101359726148595572425701010092770265651640539839239146761561
    dpm:  -2.61003888738699720011019121408101359726148595572425701010092770265651640539839239146761561
    ipm: [-2.61003888738699720011019121408101359726148595572425701010092770265651640539839239146761564 88985,
          -2.61003888738699720011019121408101359726148595572425701010092770265651640539839239146761557 52621]
    gpm:  -2.61003888738699720011019121408101359726148595572425701010092770265651640539839239146761561 01
    apm: [-2.61003888738699720011019121408101359726148595572425701010092770265651640539839239146762 +/- 5.04e-87]
cmath53:  -2.61003888738699
sflintc:  -2.610039
dflintc:  -2.610038887387
eflintc:  -2.6100388873869972001
qflintc:  -2.61003888738699720011019121408101
oflintc:  -2.61003888738699720011019121408101359726148595572425701010092770265651 64
mflintc:  -2.61003888738699720011019121408101359726148595572425701010092770265651640539839239146761561
aflintc: [-2.61003888738699720011019121408101359726148595572425701010092770265651640539839239146761 616 +/- 6.74e-88]
```

3.11.12 Binomial coefficient, ${}_nC_k = (k \cdot B(k, n-k+1))^{-1}$

`ctx.binomial`(n, k)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns the binomial coefficient of n and k, ${}_nC_k = \binom{n}{k} = \frac{n!}{k!(n-k)!}$, for $k \geq 0$. More generally, the binomial coefficient is a well-defined function of arbitrary real or complex n and k, via the gamma function.

$$ {}_nC_k = \binom{n}{k} = \frac{n!}{k!(n-k)!} = \frac{\Gamma(n+1)}{\Gamma(k+1)\Gamma(n-k+1)} = \frac{1}{k \cdot B(k, n-k+1)}. $$

See also Wikipedia [1248], MathWorld [877], NIST [482], BoostMath [96], Ehrhardt [295] (3.5.4.4), Flint [735], Flint [725], Mpmath [584].

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; y = 2.7; gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.binomial(x, y)))
    fpm:  11.4570392382974
    mpm:  11.457039238297378090997844974204970981866550743782351295543754129100502541891872555071226 4
    dpm:  11.457039238297378090997844974204970981866550743782351295543754129100502541891872555071226 4
    ipm: [11.457039238297378090997844974204970981866550743782351295543754129100502541891872555071226330512,
          11.457039238297378090997844974204970981866550743782351295543754129100502541891872555071226389422]
    gpm:  11.457039238297378090997844974204970981866550743782351295543754129100502541891872555071226362
    apm: [11.457039238297378090997844974204970981866550743782351295543754129100502541891872555071226 +/- 4.19e-88]
 math53:  11.4570392382974
  sreal:  11.45704
  dreal:  11.4570392382974
  ereal:  11.45703923829737809
  qreal:  11.457039238297378090997844974205
  oreal:  11.457039238297378090997844974204970981866550743782351295543754129100501
  mreal:  11.457039238297378090997844974204970981866550743782351295543754129100502541891872555071226 4
 sflint:  11.45704
 dflint:  11.4570392382974
 eflint:  11.45703923829737809
 qflint:  11.457039238297378090997844974205
 oflint:  11.457039238297378090997844974204970981866550743782351295543754129100503
 mflint:  11.457039238297378090997844974204970981866550743782351295543754129100502541891872555071226 4
 aflint: [11.457039238297378090997844974204970981866550743782351295543754129100502541891872555071226 +/- 4.70e-88]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  y = 2.7+3j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53, qcplx]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.sin(x)))
    fpm:  (0.000140760980747426, 6.18109303428229)
    mpm:  (0.00014076098075590658726220281283867636734714100488095, 6.
↪18109303428228758709228556603116883085683231824 12)
cmath53:  (0.000140760980741957, 6.18109303428232)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  y = 2.7+3j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.binomial(x, y))))
    fpm:  0.000140760980747426
    mpm:  0.000140760980755906587262202812838676367347141004985683628696124779036886513622915167855908731
    dpm:  0.000140760980755906587262202812838676367347141004985683628696124779036886513622915167855912982
    ipm: [0.000140760980755906587262202812838676367347141004985683628696124779036886513622915167855622722308 11,
          0.000140760980755906587262202812838676367347141004985683628696124779036886513622915167856180191429 4]
    gpm:  0.000140760980755906587262202812838676367347141004985683628696124779036886513622915167855908731
    apm: [0.000140760980755906587262202812838676367347141004985683628696124779036886513622915167856 +/- 6.53e-88]
```

(continues on next page)

(continued from previous page)

```
cmath53:  0.000140760980741957
sflintc:  0.0001384845
dflintc:  0.000140760980755907
eflintc:  0.00014076098075590451684
qflintc:  0.000140760980755906587262202812831321
oflintc:  0.000140760980755906587262202812838676367347141004985683628696124779036886513622915167855894233
mflintc:  0.000140760980755906587262202812838676367347141004985683628696124779036886513622915167855894233
aflintc: [0.000140760980755906587262202812838676367347141004985683628696124779036886513622915167855894233 +/- 5.13e-87]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  y = 2.7+3j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.binomial(x, y))))
    fpm:  6.18109303428229
    mpm:  6.181093034282287587092285566031168830856832318241202975947889123548229683435920937850070 91
    dpm:  6.181093034282287587092285566031168830856832318241202975947889123548229683435920937850070 91
    ipm: [6.181093034282287587092285566031168830856832318241202975947889123548229683435920937850070 0978605,
          6.181093034282287587092285566031168830856832318241202975947889123548229683435920937850071 7227705]
    gpm:  6.181093034282287587092285566031168830856832318241202975947889123548229683435920937850070 9098
    apm: [6.181093034282287587092285566031168830856832318241202975947889123548229683435920937850071 +/- 6.25e-88]
cmath53:  6.18109303428232
sflintc:  6.181093
dflintc:  6.18109303428229
eflintc:  6.1810930342822875869
qflintc:  6.181093034282287587092285566031117
oflintc:  6.1810930342822875870922855660311688308568323182412029759478891235482297
mflintc:  6.181093034282287587092285566031168830856832318241202975947889123548229683435920937850070 91
aflintc: [6.181093034282287587092285566031168830856832318241202975947889123548229683435920937850070 7 +/- 1.89e-87]
```

3.12 Miscellaneous functions

3.12.1 Lambert W function, $W_0(x)$

`ctx.lambert_w0(x)`

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns $W_0(x)$, the real-valued principal branch of the Lambert W function for $x > -1/e$, with $W_0(x) \geq -1$ for $x < 0$. The Lambert W function is defined as the solution of $x = W(x)\exp(W(x))$.

See also Wikipedia [1257], MathWorld [887], NIST [486], BoostMath [106], Corless *et al.* [185], Ehrhardt [295] (3.10.15), Flint [740], Flint [730], Mpmath [592].

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -0.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.lambert_w0(x)))
    fpm:  -0.111832559158963
    mpm:  -0.111832559158962964833569456820265842272645362291265863329689772762194331960008827385487011
    dpm:  NaN
    ipm: [nan,
          nan]
    gpm:  -0.111832559158962964833569456820265842272645362291265863329689772762194331960008827385487011
    apm: [-0.111832559158962964833569456820265842272645362291265863329689772762194331960008827385487011 +/- 1.47e-91]
 math53:  -0.111832559158963
  sreal:  -0.1118326
  dreal:  -0.111832559158963
  ereal:  -0.11183255915896296483
  qreal:  -0.111832559158962964833569456820266
  oreal:  -0.111832559158962964833569456820265842272645362291265863329689772762194331
  mreal:  -0.111832559158962964833569456820265842272645362291265863329689772762194331960008827385487011
 sflint:  -0.1118326
 dflint:  -0.111832559158963
 eflint:  -0.11183255915896296484
 qflint:  -0.111832559158962964833569456820266
 oflint:  -0.111832559158962964833569456820265842272645362291265863329689772762194331
 mflint:  -0.111832559158962964833569456820265842272645362291265863329689772762194331960008827385487011
 aflint: [-0.111832559158962964833569456820265842272645362291265863329689772762194331960008827385487011 +/- 2.17e-91]
```

3.12.2 Lambert W function, $W_{-1}(x)$

`ctx.lambert_wm1(x)`

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns $W_{-1}(x)$, the second real-valued, non-principal, branch of the Lambert W function for $-1/e < x < 0$, with $W_{-1}(x) \leq -1$ for $x < 0$. The Lambert W function is defined as the solution of $x = W(x)\exp(W(x))$, Flint [740], Flint [730].

See also Wikipedia [1257], MathWorld [887], NIST [486], BoostMath [106], Ehrhardt [295] (3.10.15), Mpmath [592].

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -0.1; gui.setdps(90)
>>> for ctx in ctxlistreal: print(ctx.fmtname + ': ' + ctx.fmt(ctx.sin(x)))
    fpm:  -3.5771520639573
    mpm:  -3.577152063957297218409391963511994880401796257793075923683527755791687236350575462861463 66
    dpm:  NaN
    ipm: [nan,
          nan]
    gpm:  -3.577152063957297218409391963511994880401796257793075923683527755791687236350575462861463 6599
    apm: [-3.577152063957297218409391963511994880401796257793075923683527755791687236350575462861463 66 +/- 5.39e-90]
 math53:  -3.5771520639573
```

(continues on next page)

(continued from previous page)

```
 sreal:  -3.577152
 dreal:  -3.5771520639573
 ereal:  -3.5771520639572972184
 qreal:  -3.577152063957297218409391963511994880401796257793075923683527755791687236350575462861463 65
 oreal:  -3.577152063957297218409391963511994880401796257793075923683527755791687236350575462861463 72
 mreal:  -3.577152063957297218409391963511994880401796257793075923683527755791687236350575462861463 65
sflint:  -3.577152
dflint:  -3.5771520639573
eflint:  -3.5771520639572972184
qflint:  -3.577152063957297218409391963511994880401796257793075923683527755791687236350575462861463 65
oflint:  -3.577152063957297218409391963511994880401796257793075923683527755791687236350575462861463 72
mflint:  -3.577152063957297218409391963511994880401796257793075923683527755791687236350575462861463 65
aflint: [-3.577152063957297218409391963511994880401796257793075923683527755791687236350575462861463 65 +/- 7.23e-90]
```

3.12.3 Lambert W (general case)

`ctx.lambert_wk`(z, k=*0*)

where `ctx` is `math53`, `ctxboost`, `ctxflint`.

Returns the Lambertw function of z.

See also BoostMath [106], Wikipedia [1257], MathWorld [887], NIST [486], Corless *et al.* [185], Ehrhardt [295] (4.2.39), Flint [740], Flint [730], Mpmath [592].

The Lambert W function $W(z)$ is defined as the inverse function of $w \exp(w)$. In other words, the value of $W(z)$ is such that $z = W(z) \exp(W(z))$ for any complex number z.

The Lambert W function is a multivalued function with infinitely many branches $W_k(z)$, indexed by $k \in \mathbb{Z}$. Each branch gives a different solution w of the equation $z = w \exp(w)$. All branches are supported:

- `lambertw(z)` gives the principal solution (branch 0)
- `lambertw(z, k)` gives the solution on branch k

The Lambert W function has two partially real branches: the principal branch ($k = 0$) is real for real $z > -1/e$, and the $k = -1$ branch is real for $-1/e < z < 0$. All branches except $k = 0$ have a logarithmic singularity at $z = 0$.

The definition, implementation and choice of branches is based on Corless *et al.* [185].

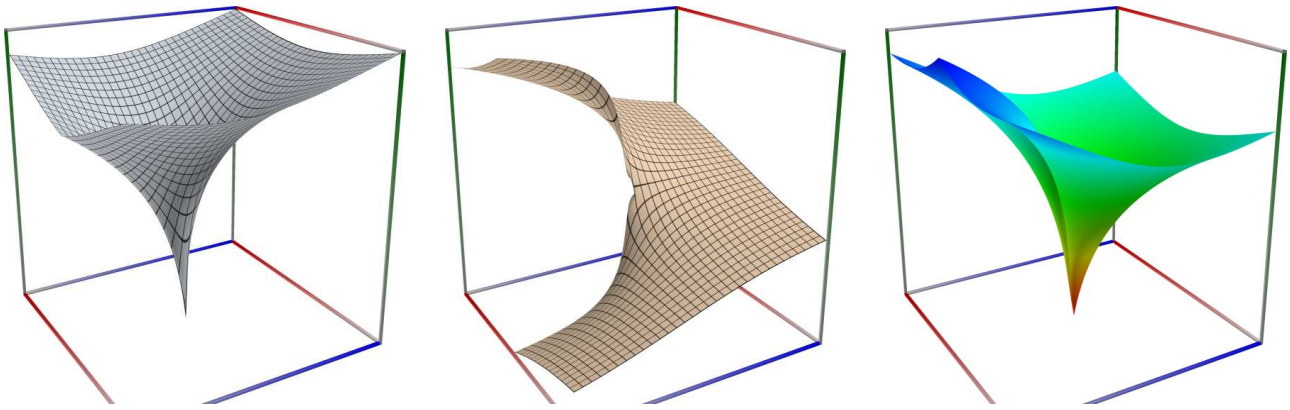

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  k = 3; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.lambert_wk(x, k)))
    fpm:  (-1.2961584376621, 19.9818493888978)
    mpm:  (-1.2961584376620953957081306519705252045964283461600, 19.98184938889778783345128000509687326531635136542103659757112180097054887667308561002222608)
cmath53:  (-1.2961584376621, 19.9818493888978)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  k = 3; gui.setdps(50)
>>> for ctx in gui.ctxlist_noboost_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.lambert_wk(x, k))))
    fpm:  -1.2961584376621
    mpm:  -1.2961584376620953957081306519705252045964283461600
    dpm:  NaN
    ipm: [nan,
          nan]
    gpm:  -1.2961584376620953957081306519705252045964283461600
    apm: [-1.2961584376620953957081306519705252045964283461600 +/- 2.09e-50]
cmath53:  -1.2961584376621
sflintc:  -1.296158
dflintc:  -1.2961584376621
eflintc:  -1.2961584376620953957
qflintc:  -1.2961584376620953957081306519705
oflintc:  -1.2961584376620953957081306519705252045964283461600168785872763086319775
mflintc:  -1.2961584376620953957081306519705252045964283461600
aflintc: [-1.2961584376620953957081306519705252045964283461600 +/- 2.54e-50]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  k = 3; gui.setdps(50)
>>> for ctx in gui.ctxlist_noboost_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.lambert_wk(x, k))))
    fpm:  19.9818493888978
    mpm:  19.98184938889778783345128000509687326531635136542103659757112180097054887667308561002222608
    dpm:  0
    ipm: [0.0,
          0.0]
    gpm:  19.98184938889778783345128000509687326531635136542103659757112180097054887667308561002222608
    apm: [19.98184938889778783345128000509687326531635136542103659757112180097054887667308561002222608 +/- 2.57e-89]
cmath53:  19.9818493888978
sflintc:  19.98185
dflintc:  19.9818493888978
eflintc:  19.981849388897787834
qflintc:  19.98184938889778783345128000509
oflintc:  19.98184938889778783345128000509687326531635136542103659757112180097054887667308561002222608
mflintc:  19.98184938889778783345128000509687326531635136542103659757112180097054887667308561002222608
aflintc: [19.98184938889778783345128000509687326531635136542103659757112180097054887667308561002222608 +/- 3.74e-89]
```

3.12.4 Arithmetic-geometric mean

`ctx.agm`(*x*, *y=1*)

where `ctx` is `math53`, `mathc53`, `ctxboost` or `ctxflint`.

Returns the arithmetic-geometric mean of $|x|$ and $|y|$. See also Wikipedia [1267], MathWorld [909], Ehrhardt [295] (4.2.1), Ehrhardt [295] (4.2.2), Mpmath [599].

With $a_0 = \max(|x|, |y|)$, $b_0 = \min(|x|, |y|)$ the AGM is calculated using the recurrence formulas

$$a_{n+1} = \tfrac{1}{2}(a_n + b_n), \quad b_{n+1} = \sqrt{a_n b_n}.$$

The sequences converge quadratically to a common limit and $a_n \geq b_n$. The iteration is terminated if $a_n - b_n \leq \epsilon a_n$, where ϵ is less than the square root of the machine epsilon. The result is $(a_n + b_n)/2$.

The function $\operatorname{agm}(a, b)$ can also be expressed in closed form in terms of the complete elliptic integral of the first kind $K(k)$ as

$$\operatorname{agm}(a, b) = \frac{(a+b)\pi}{4K((a-b)/(a+b))}.$$

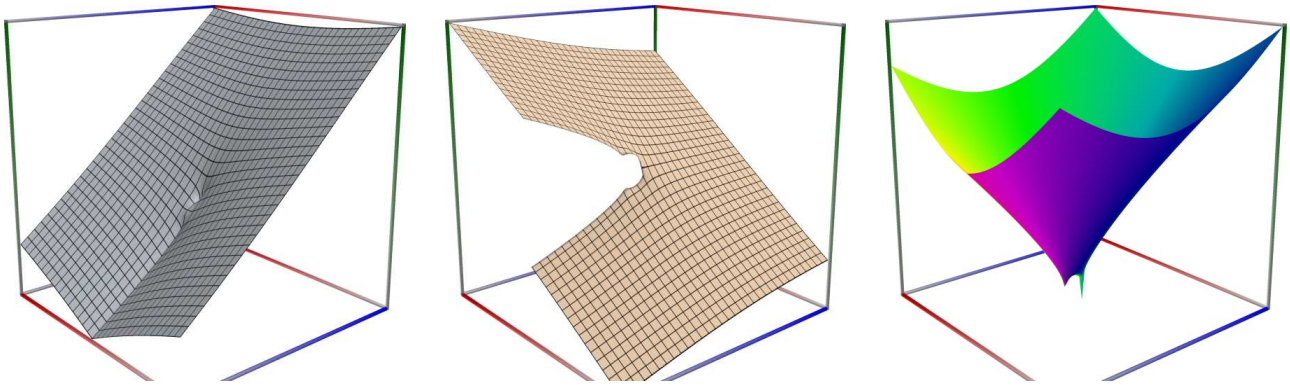

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \leq x \leq 6$ (blue axis), $-6 \leq y \leq 6$ (red axis), $-10 \leq z \leq 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; y = 2.7; gui.setdps(90)
>>> for ctx in gui.ctxlist_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.agm(x, y)))
    fpm:  3.80480946181798
    mpm:  3.80480946181797638640492371413247210535521151164124372537438823873487755230166530999087551
    dpm:  NaN
    ipm: [nan,
          nan]
    gpm:  3.80480946181797638640492371413247210535521151164124372537438823873487755230166530999087551102
    apm: [3.80480946181797638640492371413247210535521151164124372537438823873487755230166530999087551 +/- 5.60e-90]
 math53:  3.80480946181798
  sreal:  3.80481
  dreal:  3.80480946181798
  ereal:  3.8048094618179763866
  qreal:  3.80480946181797638640492371413247
  oreal:  3.80480946181797638640492371413247210535521151164124372537438823873487776
  mreal:  3.80480946181797638640492371413247210535521151164124372537438823873487755230166530999087551
 sflint:  3.804809
 dflint:  3.80480946181798
 eflint:  3.8048094618179763864
 qflint:  3.80480946181797638640492371413247
 oflint:  3.80480946181797638640492371413247210535521151164124372537438823873487776
 mflint:  3.80480946181797638640492371413247210535521151164124372537438823873487755230166530999087551
 aflint: [3.80480946181797638640492371413247210535521151164124372537438823873487755230166530999087755 +/- 1.97e-89]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = 5.1+2j;  y = 2.7+3j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.agm(x, y)))
    fpm:  (3.88305290215932, 2.58876620479596)
    mpm:  (3.8830529021593203337030666542457879036456014594432, 2.588766204795958483220687078430882649132158315589 7)
cmath53:  (3.88305290215932, 2.58876620479596)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = 5.1+2j;  y = 2.7+3j; gui.setdps(90)
```

(continues on next page)

(continued from previous page)

```
>>> for ctx in gui.ctxlist_noboost_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.agm(x, y))))
    fpm:  3.88305290215932
    mpm:  3.883052902159320333703066654245787903645601459443212443832226693220615606299846240307173 68
    dpm:  NaN
    ipm: [nan,
          nan]
    gpm:  3.8830529021593203337030666542457879036456014594432124438322266932206156062998462403071736798
    apm: [3.883052902159320333703066654245787903645601459443212443832226693220615606299846240307173 7 +/- 3.82e-89]
cmath53:  3.88305290215932
sflintc:  3.883053
dflintc:  3.88305290215932
eflintc:  3.8830529021593203336
qflintc:  3.883052902159320333703066654245 79
oflintc:  3.88305290215932033370306665424578903645601459443212443832226693220615 6
mflintc:  3.883052902159320333703066654245787903645601459443212443832226693220615606299846240307173 66
aflintc: [3.883052902159320333703066654245787903645601459443212443832226693220615606299846240307173 7 +/- 7.69e-89]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = 5.1+2j;  y = 2.7+3j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx: print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.agm(x, y))))
    fpm:  2.58876620479596
    mpm:  2.588766204795958483220687078430882649132158315589696415417448510272022160522000 6010768377
    dpm:  0
    ipm: [0.0,
          0.0]
    gpm:  2.5887662047959584832206870784308826491321583155896964154174485102720221605220006010768377001
    apm: [2.588766204795958483220687078430882649132158315589696415417448510272022160522000 6010768377 +/- 9.49e-90]
cmath53:  2.58876620479596
sflintc:  2.588766
dflintc:  2.58876620479596
eflintc:  2.5887662047959584832
qflintc:  2.588766204795958483220687078430 88
oflintc:  2.588766204795958483220687078430882649132158315589696415417448510272022 2
mflintc:  2.588766204795958483220687078430882649132158315589696415417448510272022160522000 60107683769
aflintc: [2.588766204795958483220687078430882649132158315589696415417448510272022160522000 6010768377 +/- 3.48e-89]
```

CHAPTER

FOUR

STATISTICAL DISTRIBUTIONS

For a general introduction to probability distributions, see: Wikipedia [1131], Wikipedia [1123], Wikipedia [1121], Wikipedia [1138].

The design of this library has been influenced by Bristow *et al.* [159], Witkovsky [1451].

See also Wikipedia [1118] and Abramowitz and Stegun. [4] (from which the following introductory text has been taken, with small edits).

A real-valued function $F(x)$ is termed a (univariate) cumulative distribution function (cdf) or simply distribution function if

1. $F(x)$ is non-decreasing, i.e. $F(x_1) \leq F(x_2)$ for $x_1 \leq x_2$.
2. $F(x)$ is everywhere continuous from the right, i.e. $F(x) = \lim_{\epsilon \to 0+} F(x + \epsilon)$
3. $F(-\infty) = 0, F(\infty) = 1$.

The function $F(x)$ signifies the probability of the event "$X \leq x$", i.e. Pr $\{X \leq x\} = F(x)$, where X is a random variable, and thus describes the cdf of X. The two principle types of distribution functions are termed *discrete* and *continuous*.

Discrete distributions: Discrete distributions are characterized by the random variable X taking on an enumerable number of values $\ldots x_{-1}, x_0, x_1, \ldots$ with point probabilities $p_n = \text{Pr}\{X = x_n\} \geq 0$, which only need to be subject to the restriction $\sum_n p_n = 1$. The corresponding distribution function can then be written as

$$F(x) = \text{Pr}\{X \leq x\} = \sum_{x_n \leq x} p_n,$$

where the summation is over all values of x for which $x_n \leq x$. The set $\{x_n\}$ of values for which $p_n > 0$ is termed the domain of he random variable X. A discrete distribution of a random variable is called a *lattice distribution* if there exists numbers a and $b \neq 0$ such that every possible value of X can be represented in the form $a + bn$ where n takes only integral values.

Continuous distributions: Continuous distributions are characterized by $F(x)$ being continuous. If $F(x)$ is absolutely continuous then $F(x)$ possesses a derivative $F'(x) = f(x)$ and the cdf can be written as

$$F(x) = \text{Pr}\{X \leq x\} = \int_{-\infty}^{x} f(t)\text{d}t.$$

The derivative $f(x)$ is termed the probability density function (pdf), and the values of x for which $f(x) > 0$ make up the domain of the variable X.

The source code for the C# tests in Visual Studio can be found online in the `XlCalcNet` repository or in the corresponding local `XlCalcNet` folder in the file B04_Distributions.cs.

4.1 Introduction to random variables and distributions

4.1.1 Elementary symbolic algebra of random variables

See also https://en.wikipedia.org/wiki/Algebra_of_random_variables.

Considering two random variables X and Y the following algebraic operations are possible:

Addition: $Z = X + Y = Y + X$.

Subtraction: $Z = X - Y = -Y + X$.

Multiplication: $Z = XY = YX$.

Division: $Z = X/Y = X \cdot (1/Y) = (1/Y) \cdot X$.

In all cases, the variable Z resulting from each operation is also a random variable. All commutative and associative properties of conventional algebraic operations are also valid for random variables. If any of the random variables is replaced by a deterministic variable or by a constant value, all the previous properties remain valid.

Simple tranformations, results for pdf and cdf: see Rinne [478], page 217.

This is a summary of some transformations:

Table 1: Some transformations

Transformation $Y = g(X)$	pdf $f_Y(y)$	cdf $F_Y(y)$
$Y = a + bX; \quad a, x \in \mathbb{R}; b \neq 0.$	$= \frac{1}{\lvert b \rvert} f_X\left(\frac{y-a}{b}\right).$	$= \begin{cases} F_X\left(\frac{y-a}{b}\right) & \text{for } b > 0, \\ 1 - F_X\left(\frac{y-a}{b}\right) & \text{for } b < 0. \end{cases}$
$Y = X^r; \quad r \in \mathbb{N}, x \in \mathbb{R}.$	$= \frac{1}{r} y^{\frac{1}{r}-1} f_X\left(\sqrt[r]{y}\right).$	$= F_X\left(\sqrt[r]{y}\right).$
$Y = aX^k; \quad a, k \in \mathbb{R} \setminus \{0\}; \quad x > 0.$	$= \frac{1}{\lvert ka \rvert} \left(\frac{y}{a}\right)^{\frac{1}{k}-1} f_X\left(\sqrt[k]{\frac{y}{a}}\right)$	$= \begin{cases} F_X\left(\sqrt[k]{\frac{y}{a}}\right) & \text{for } a > 0, \\ 1 - F_X\left(\sqrt[k]{\frac{y}{a}}\right) & \text{for } a < 0. \end{cases}$
$Y = a\sqrt[k]{X}; \quad a, k \in \mathbb{R} \setminus \{0\}; \quad x > 0.$	$= \frac{k}{\lvert a \rvert} \left(\frac{y}{a}\right)^{k-1} f_X\left(\left[\frac{y}{a}\right]^k\right)$	$= \begin{cases} F_X\left(\left[\frac{y}{a}\right]^k\right) & \text{for } a > 0, \\ 1 - F_X\left(\left[\frac{y}{a}\right]^k\right) & \text{for } a < 0. \end{cases}$
$Y = a/X; \quad a \in \mathbb{R} \setminus \{0\}; \quad x > 0.$	$= \frac{\lvert a \rvert}{y^2} f_X\left(\frac{a}{y}\right)$	$= \begin{cases} F_X\left(\frac{a}{y}\right) & \text{for } a > 0, \\ 1 - F_X\left(\frac{a}{y}\right) & \text{for } a < 0. \end{cases}$

Please see the above Table. *The linear transformation*.

For more detailed result: see Rinne [478], p. 218-219.

4.1.2 Linear transformations of random variables

All distributions have location (L) and Scale (S) parameters along with any other parameters needed. The distributions are given in standard forms where $L = 0$ and $S = 1$. The nonstandard forms can be obtained for the various functions using the following transformations:

Table 2: The linear transformation

Function	Transformation
random variates	$\text{rnd}_X(L, S) = L + S \cdot \text{rnd}X(0, 1)$
cumulative distribution function	$\text{cdf}_X(x; L, S) = \text{cdf}_X\left(\frac{x-L}{S}; 0, 1\right)$
probability density function	$\text{pdf}_X(x; L, S) = \frac{1}{S} \cdot \text{pdf}_X\left(\frac{x-L}{S}; 0, 1\right)$
quantile function	$\text{qtf}_X(q; L, S) = L + S \cdot \text{qtf}_X(q; 0, 1)$
probability sparsity function	$\text{psf}_X(q; L, S) = S \cdot \text{psf}_X(q; 0, 1)$
hazard function	$\text{hf}_X(x; L, S) = \frac{1}{S} \cdot \text{hf}_X\left(\frac{x-L}{S}; 0, 1\right)$
cumulative hazard function	$\text{chf}_X(x; L, S) = \text{chf}_X\left(\frac{x-L}{S}; 0, 1\right)$
survival function	$\text{sf}_X(x; L, S) = \text{sf}_X\left(\frac{x-L}{S}; 0, 1\right)$
inverse survival function	$\text{isf}_X(p; L, S) = L + S \cdot \text{isf}_X(p; 0, 1)$
moment generating function	$M_X(t; L, S) = e^{t \cdot L} \cdot M_X(t \cdot S; 0, 1)$
characteristic function	$C_X(t; L, S) = e^{it \cdot L} \cdot C_X(t \cdot S; 0, 1)$
cumulant generating function	$K_X(t; L, S) = t \cdot L + K_X(t \cdot S; 0, 1)$
differential entropy	$\text{h}_X(L, S) = \text{h}_X(0, 1) + \log(S)$
mean	$\mu_X(1; L, S) = L + S \cdot \mu_X(1; 0, 1)$
central moments	$\mu_X(r; L, S) = S^r \cdot \mu_X(r; 0, 1); r > 1$
cumulants	$\kappa_X(r; L, S) = S^r \cdot \kappa_X(r; 0, 1); r > 1$

Please see the above Table. *The linear transformation*.

For more detailed result: see Rinne [478], p. 218-219.

Examples

- Standard normal distribution
- Ch-squared distribution with different scales

4.1.3 Random variables having mixture distributions

A random variable follows a mixture distribution if its cumulative distribution function (and the probability density function if it exists) can be expressed as a convex combination (i.e. a weighted sum, with non-negative weights w_i that sum to 1) of other distribution functions and density functions. The individual distributions that are combined to form the mixture distribution are called the mixture components, and the probabilities (or weights) associated with each component are called the mixture weights w_i. See also Wikipedia [1155].

Table 3: The mixture distribution

Function	Transformation
random variates	see text below
cumulative distribution function	$\text{cdf}_Z(x) = \sum_{i=1}^{k} w_i \cdot \text{cdf}_{X_i}(x)$
probability density function	$\text{pdf}_Z(x) = \sum_{i=1}^{k} w_i \cdot \text{pdf}_{X_i}(x)$
probability mass function	$\text{pmf}_Z(x) = \sum_{i=1}^{k} w_i \cdot \text{pmf}_{X_i}(x)$
survival function	$\text{sf}_Z(x) = \sum_{i=1}^{k} w_i \cdot \text{sf}_{X_i}(x)$
moment generating function	$M_Z(t) = \sum_{i=1}^{k} w_i \cdot M_{X_i}(t)$
characteristic function	$C_Z(t) = \sum_{i=1}^{k} w_i \cdot C_{X_i}(t)$
raw moments	$\mu'_Z(r) = \sum_{i=1}^{k} w_i \cdot \mu'_{X_i}(x)$

Please see the above Table. *The mixture distribution*.

The cumulants and the central moments can be calculated from the raw moments.

The cumulant generating function can be calculated from the moment generating function.

Examples

- Skellam: poisson with same rate back to back
- Laplace: exponential with same rate back to back
- Asymmetric Laplace: exponential with different rates back to back
- Hyperexponential distribution

4.1.4 Linear combinations of independent random variables

Suppose Z is the sum of n independent random variables $X_1, \ldots, X_n$ each with probability mass functions $f_{X_i}(x)$. Then $Z = \sum_{i=1}^{n} X_i$ is distributed as the convolution of the distributions of the X_i.

See also: Wikipedia [1156].

In cases where there are no known expressions in terms of other, readily computed distributions, the distribution of Z can be calculated using the characteristic functions of the X_i, as shown in the table below.

Table 4: The sums of random variables

Function	Transformation
random variates	$\text{rnd}_Z() = \sum_{i=1}^{k} a_i \cdot \text{rnd}_{X_i}()$
moment generating function	$M_Z(t) = \prod_{i=1}^{k} M_{X_i}(a_i \cdot t)$
characteristic function	$C_Z(t) = \prod_{i=1}^{k} C_{X_i}(a_i \cdot t)$
cumulant generating function	$K_Z(t) = \sum_{i=1}^{k} K_{X_i}(a_i \cdot t)$
cumulants	$\kappa_Z(r) = \sum_{i=1}^{k} a_i^r \cdot \kappa_{X_i}(r)$

Please see the above Table. *The sums of random variables*.

The raw moments and central moments are calculated from the cumulants.

The pmf, pdf and cdf are calculated by methods 1-3.

The qtf is started via the cumulants (Cornish-Fisher), followed by Newton iterations.

The pmf-vector is calculated via discrete convolution.

4.1.5 The log-transform of continuous random variables

A random variable X has a log-transform Y (which also is a random variable), if $\text{cdf}_X(x) = \text{cdf}_Y(\log(x))$, in other words if $\log(X) \sim Y$ (where $\sim$ means "is distributed as"). The transformation is only useful if the domain of X is (a, b) with $0 \leq a < b \leq \infty$ (otherwise the domain of Y would be extended into the complex plane). It is only implemented for continuous distributions.

The pdf, cdf, sf, qtf and isf of X and Y can be expressed in terms of each other, as shown below, together with the remarkable fact that the characteristic function of Y can be expressed in terms of the raw moments of X (this assumes that the raw moments of X are available in a form which allows to replace the discrete index variable r with the continuous complex variable it).

Table 5: The logarithmic transformation of a variable

Function	Transformation
random variates	$\text{rnd}_Y() = \log(\text{rnd}_X())$
	$\text{rnd}_X() = \exp(\text{rnd}_Y())$
probability density function	$\text{pdf}_Y(t) = \text{pdf}_X(\exp(t)) \cdot \exp(t)$
	$\text{pdf}_X(u) = \text{pdf}_Y(\log(u)) \cdot \frac{1}{u}$
cumulative distribution function	$\text{cdf}_Y(t) = \text{cdf}_X(\exp(t))$
	$\text{cdf}_X(u) = \text{cdf}_Y(\log(u))$
survival function	$\text{sf}_Y(t) = \text{sf}_X(\exp(t))$
	$\text{cdf}_X(u) = \text{cdf}_Y(\log(u))$
quantile function	$\text{qtf}_Y(q) = \exp(\text{qtf}_X)$
	$\text{qtf}_X(q) = \log(\text{qtf}_Y)$
inverse survival function	$\text{isf}_Y(q) = \exp(\text{isf}_X)$
	$\text{isf}_X(q) = \log(\text{isf}_Y)$
characteristic function of Y and raw moments of X	$C_Y(t) = \mu'_X(it)$

Please see the above Table. *The logarithmic transformation of a variable*.

One of the major features of the log-transform is its ability to express the distribution of the product of variables X_i as the sum of their log-transforms Y_i.

Examples

- Lognormal distribution

X: Lognormal

Y: Standard normal

- Beta distribution

4.2 Base class for univariate distributions

class rv_base(*rv_base*)

This is the base class, from which `rv_continuous` and `rv_discrete` inherit. There are no parameters and the support interval is $(-\infty, \infty)$.

The constructor has the following form:

```
class rv_continuous(rv_base):
    __a = -mp.inf
    __b = +mp.inf

    def __init__(self, df):
        pass
```

4.2.1 Boost: Cumulative distribution function

rv_base.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X:

See also Wikipedia [1118].

There are various ways to calculate a cdf. Ideally, it is available in closed from and can be calculated directly, or there is are dedicated functions to calculate it. If this is not the case, then one of the options given below can be used. There is no method which is always best, and the choice depends not only on the function, but also on the values of the argument and the parameters.

rv_base.**set_cdf_method**(*cdf_method*)

Sets the method to be used for the calculation of the cdf. `cdf_method` can take the following values:

1. "direct": this is the default if a closed form of the cdf exists, otherwise returns `not implemented`.
2. "from_pdf": only for continuous functions for which the pdf is available in closed form, otherwise returns `not implemented`.
3. "from_pmf": only for discrete functions, for which the pmf vector is available, otherwise returns `not implemented`.
4. "from_charfunc": only for functions for which the characteristic is available in closed form, otherwise returns `not implemented`.
5. "from_edgeworth": only if at least the first 2 cumulants exist, otherwise returns `not implemented`.
6. "from_lug_rice": only if the cumulant generating function exists, otherwise returns `not implemented`.

There may be additional options for any particular function, which are documented in the decription of the function.

4.2.2 Boost: Survival function

rv_base.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function (sf) of a random variable X.

See also Wikipedia [1137].

$$\text{sf}_X(x) = 1 - \text{cdf}_X(x) = \int_x^\infty \text{pdf}_X(x)\text{d}t.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456 1356E+00
```

4.2.3 Hazard function

`rv_continuous.`**`hazard`**`(`x`)`

Returns $\text{hazard}_X(x)$, the hazard function of a random variable X, defined as the ratio of the probability density function to the survival function.

See also Wikipedia [1122], BoostMath [46].

$$\text{hazard}_X(x) = \frac{\text{pdf}_X(x)}{\text{sf}_X(x)} = \frac{\text{pdf}_X(x)}{1 - \text{cdf}_X(x)}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

4.2.4 Cumulative Hazard Function

`rv_continuous.`**`chf`**`(`x`)`

Returns $\text{chf}_X(x)$, the cumulative function of a random variable X, defined as the ratio of the probability density function to the survival function.

See also Wikipedia [1122], BoostMath [39].

$$\text{chf}_X(x) == \int_{-\infty}^{x} \text{hazard}_X(x)\text{d}t = -\log(1 - \text{cdf}_X(x)).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

4.2.5 Boost: Quantile function

`rv_base.`**`qtf`**`(`x`)`

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X.

$$\text{qtf}_X(q) = \text{cdf}_X^{-1}(q).$$

See also Wikipedia [1132].

There are various ways to calculate the quantile function. Ideally, it is available in closed from and can be calculated directly, or there is are dedicated functions to calculate it. If this is not the case, then one of the options given below can be used. There is no method which is always best, and the choice depends not only on the function, but also on the values of the argument and the parameters.

`rv_base.`**`set_qtf_method`**`(`*qtf_method*`)`

Sets the method to be used for the calculation of the cdf. `qtf_method` can take the following values:

1. "direct": this is the default if a closed form of the quantile function exists.
2. "from_cdf": this is the default if a closed form of the qtf does not exist.
3. "from_cornish_fisher": only if at least the first 2 cumulants exist, otherwise returns `not implemented`.
4. "from_jensen": only if the cumulant generating function exists, otherwise returns `not implemented`.

There may be additional options for any particular function, which are documented in the decription of the function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

4.2.6 Boost: Inverse survival function

`rv_base.isf(`x`)`

Returns $\mathrm{isf}_X(q)$, the inverse survival function (isf) of a random variable X.

See also Wikipedia [1132]

$$\mathrm{isf}_X(q) = \mathrm{qtf}_X(1-q) = \mathrm{cdf}_X^{-1}(1-q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

4.2.7 Boost: Mode

`rv_base.mode()`

Returns the mode of the function.

See also Wikipedia [1127]

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

4.2.8 Boost: Expected value (mean)

`rv_base.mean()`

Returns the expected value (mean) of the function.

See also Wikipedia [1120].

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

4.2.9 Boost: Median

`rv_base.median()`

Returns the median of the function.

See also Wikipedia [1126]

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456 1356E+00
```

4.2.10 Boost: Variance

`rv_base.variance()`

Returns the variance of the function.

See also Wikipedia [1139].

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456 1356E+00
```

4.2.11 Boost: Standard deviation

`rv_base.stdev()`

Returns the Standard deviation of the function.

See also Wikipedia [1135].

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456 1356E+00
```

4.2.12 Boost: Skewness

`rv_base.skewness()`

Returns the skewness of the function.

See also Wikipedia [1134].

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456 1356E+00
```

4.2.13 Boost: Kurtosis

`rv_base.kurtosis()`

Returns the 'proper' kurtosis (normalized fourth moment) of the distribution dist.kurtosis μ_4/μ_2^2, where μ_i is the i'th central moment of the distribution, and in particular μ_2 is the variance of the distribution.

See also Wikipedia [1125].

The kurtosis is a measure of the "peakedness" of a distribution.

Note that the literature definition of kurtosis is confusing. The definition used here is that used by for example Wolfram MathWorld (that includes a table of formulae for kurtosis excess for various distributions) but NOT the definition of kurtosis used by Wikipedia which treats "kurtosis" and "kurtosis excess" as the same quantity.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456 1356E+00
```

4.2.14 Boost: Kurtosis excess

`rv_base.`**`excess_kurtosis`**`()`

Returns the kurtosis excess of the distribution dist. kurtosis excess = kurtosis - 3.

See also Wikipedia [1119].

The kurtosis excess is a measure of the "peakedness" of a distribution, and is more widely used than the "kurtosis proper". It is defined so that the kurtosis excess of a normal distribution is zero.

This function may return a domain_error if the distribution does not have a defined kurtosis excess.

Kurtosis excess can have a value from -2 to + infinity.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456 1356E+00
```

4.2.15 Boost: Support, lower endpoint

`Dist.`**`support_lower_endpoint`**`()`

Returns the lower endpoint of the support of the function.

See also Wikipedia [1136].

See also https://en.wikipedia.org/wiki/Interval_(mathematics)

The distribution is said to be 'supported' over a range that is "the smallest closed set whose complement has probability zero". Non-mathematicians might say it means the 'interesting' smallest range of random variate x that has the cdf going from zero to unity. Outside are uninteresting zones where the pdf is zero, and the cdf zero or unity.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456 1356E+00
```

4.2.16 Boost: Support, upper endpoint

`Dist.`**`support_upper_endpoint`**`()`

Returns the upper endpoint of the support of the function.

See also Wikipedia [1136].

See also https://en.wikipedia.org/wiki/Interval_(mathematics)

The distribution is said to be 'supported' over a range that is "the smallest closed set whose complement has probability zero". Non-mathematicians might say it means the 'interesting' smallest range of random variate x that has the cdf going from zero to unity. Outside are uninteresting zones where the pdf is zero, and the cdf zero or unity.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561456135 6E+00
```

4.2.17 Boost: Range, lower endpoint

`Dist.range_lower_endpoint()`

Returns the lower endpoint of the valid range of the random variable.

See also Wikipedia [1136].

See also https://en.wikipedia.org/wiki/Interval_(mathematics)

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561456135 6E+00
```

4.2.18 Boost: Range, upper endpoint

`Dist.range_upper_endpoint()`

Returns the upper endpoint of the valid range of the random variable.

See also Wikipedia [1136].

See also https://en.wikipedia.org/wiki/Interval_(mathematics)

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561456135 6E+00
```

4.2.19 Characteristic function

`rv_base.c_x(t)`

Returns $C_X(t)$, the characteristic function of a random variable X.

See also Wikipedia [1116], Wikipedia [1120].

For a scalar random variable X the characteristic function is defined as the expected value of e^{itX}, where i is the imaginary unit, and $t \in \mathbb{R}$ is the argument of the characteristic function:

$$C_X(t) = \mathrm{E}\left[e^{itX}\right] = \int_{-\infty}^{\infty} e^{itx} d\,\mathrm{cdf}_X(x) = \int_{-\infty}^{\infty} e^{itx} \mathrm{pdf}_X(x) \mathrm{d}x = \int_0^1 e^{it\ \mathrm{qtf}_X(p)} dp = M_X(it).$$

Here $\mathrm{cdf}_X(x)$ is the cumulative distribution function of X, and the integral is of the Riemann–Stieltjes kind. If a random variable X has a probability density function $\mathrm{pdf}_X(x)$, then the characteristic function is its Fourier transform with sign reversal in the complex exponential. $\mathrm{qtf}_X(p)$ is the quantile function of X, also known as the inverse cumulative distribution function of X or the quantile function of X. $M_X(t)$ is the moment generating function of X. Note that the characteristic function of a distribution always exists, even when the probability density function or moment-generating function do not.

There are various ways to calculate the characteristic function. Ideally, it is available in closed from and can be calculated directly, or there is are dedicated functions to calculate it. If this is not the case, then one of the options given below can be used. There is no method which is always best, and the choice depends not only on the function, but also on the values of the argument and the parameters.

rv_base.**set_cf_method**(*qtf_method*)

Sets the method to be used for the calculation of the cdf. `qtf_method` can take the following values:

1. "direct": this is the default if a closed form of the characteristic function exists.
2. "from_pdf": only if the pdf is available in closed form, otherwise returns `not implemented`.
3. "from_qtf": only if the qtf is available in closed form, otherwise returns `not implemented`.
4. "from_moments": only if the raw moments are available in closed form, otherwise returns `not implemented`.

There may be additional options for any particular function, which are documented in the decription of the function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

4.2.20 Moment generating function

rv_base.**m_x**(x)

Returns $M_X(t)$, the moment generating function of a random variable X.

See also Wikipedia [1129].

There are various ways to calculate the moment generating function. Ideally, it is available in closed from and can be calculated directly, or there is are dedicated functions to calculate it. If this is not the case, then one of the options given below can be used. There is no method which is always best, and the choice depends not only on the function, but also on the values of the argument and the parameters.

rv_base.**set_mgf_method**(*mgf_method*)

Sets the method to be used for the calculation of the mgf. `mgf_method` can take the following values:

1. "direct": this is the default if a closed form of the moment generating function exists.
2. "from_charfunc": only if the characteristic is available in closed form, otherwise returns `not implemented`.
3. "from_cgf": only if the moment generating function is available in closed form, otherwise returns `not implemented`.
4. "from_pgf": only for discrete distributions and only if the probability generating function is available in closed form, otherwise returns `not implemented`.
5. "from_moments": only if the raw moments are available in closed form, otherwise returns `not implemented`.

There may be additional options for any particular function, which are documented in the decription of the function.

Related to the moment-generating function are a number of other transforms that are common in probability theory:

4.2.21 Cumulant generating function

rv_base.**k_x**(x)

Returns $K_X(t)$, the cumulant generating function of a random variable X.

See also Wikipedia [1117].

There are various ways to calculate the cumulant generating function. Ideally, it is available in closed from and can be calculated directly, or there is are dedicated functions to calculate it. If this is not the case, then one of the options given below can be used. There is no method which is always best, and the choice depends not only on the function, but also on the values of the argument and the parameters.

rv_base.**set_cgf_method**(*cgf_method*)

Sets the method to be used for the calculation of the cgf. `cgf_method` can take the following values:

1. "direct": this is the default if a closed form of the moment generating function exists.
2. "from_charfunc": only if the characteristic function is available in closed form, otherwise returns `not implemented`.
3. "from_mgf": only if the moment generating function is available in closed form, otherwise returns `not implemented`.
4. "from_pgf": only for discrete distributions and only if the probability generating function is available in closed form, otherwise returns `not implemented`.
5. "from_cumulants": only if the cumulants are available in closed form, otherwise returns `not implemented`.

There may be additional options for any particular function, which are documented in the decription of the function.

4.2.22 Raw Moments

rv_base.**raw_moments**(*k*)

Returns the first j raw moments, $\mu_j, j = 1 \dots k$, of a random variable X.

See also Wikipedia [1128]

There are various ways to calculate the raw moments. Ideally, they are available in closed from and can be calculated directly, or there is are dedicated functions to calculate them. If this is not the case, then one of the options given below can be used. There is no method which is always best.

rv_base.**set_moments_method**(*moments_method*)

Sets the method to be used for the calculation of the raw moments. `moments_method` can take the following values:

1. "direct": this is the default if a closed form of the cdf exists, otherwise returns `not implemented`.
2. "from_pdf": only for continuous functions for which the pdf is available in closed form, otherwise returns `not implemented`.
3. "from_pmf": only for discrete functions, for which the pmf vector is available, otherwise returns `not implemented`.
4. "from_cumulants": only if the cumulants are available in closed form, otherwise returns `not implemented`.
5. "from_mgf": only for functions for which the moment generating function is available in closed form, otherwise returns `not implemented`.
6. "from_charfunc": only for functions for which the characteristic function is available in closed form, otherwise returns `not implemented`.
7. "from_pgf": only for discrete distributions and only for functions for which the moment generating function is available in closed form, otherwise returns `not implemented`.

There may be additional options for any particular function, which are documented in the decription of the function.

4.2.23 Central Moments

rv_base.**central_moments**(*k*)

Returns the first j central moments, $\mu_j, j = 1 \dots k$, of a random variable X.

See also Wikipedia [1117]

There are various ways to calculate the central moments. Ideally, they are available in closed from and can be calculated directly, or there is are dedicated functions to calculate them. If this is not the case, then one of the options given below can be used. There is no method which is always best.

rv_base.**set_central_moments_method**(*central_moments_method*)

Sets the method to be used for the calculation of the central_moments_method. `central_moments_method` can take the following values:

1. "direct": this is the default if a closed form of the cdf exists, otherwise returns `not implemented`.
2. "from_raw_moments": only if the raw moments are available in closed form, otherwise returns `not implemented`.
3. "from_cumulants": only if the cumulants are available in closed form, otherwise returns `not implemented`.
4. "from_pdf": calculates the raw moments from the pdf, the converts the raw moments to the central moments.

There may be additional options for any particular function, which are documented in the decription of the function.

4.2.24 Cumulants

rv_base.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \dots k$, of a random variable X.

See also Wikipedia [1117]

There are various ways to calculate the cumulants. Ideally, they are available in closed from and can be calculated directly, or there is are dedicated functions to calculate them. If this is not the case, then one of the options given below can be used. There is no method which is always best.

rv_base.**set_cumulants_method**(*cumulants_method*)

Sets the method to be used for the calculation of the cumulants. `cumulants_method` can take the following values:

1. "direct": this is the default if a closed form of the cdf exists, otherwise returns `not implemented`.
2. "from_moments": only if the moments are available in closed form, otherwise returns `not implemented`.
3. "from_cgf": only for functions for which the moment generating function is available in closed form, otherwise returns `not implemented`.

There may be additional options for any particular function, which are documented in the decription of the function.

4.3 Base class for continuous univariate distributions

class rv_continuous(*rv_base*)

The base continuous probability distribution class, which inherits from `rv_base`. There are no parameters and the support interval is $(-\infty, \infty)$.

The constructor has the following form:

```
class rv_continuous(rv_base):
    __a = -mp.inf
    __b = +mp.inf

    def __init__(self, df):
        pass
```

4.3.1 Probability density function

rv_continuous.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X:

See also Wikipedia [1130].

There are various ways to calculate a pdf. Ideally, it is available in closed from and can be calculated directly, or there is are dedicated functions to calculate it. If this is not the case, then one of the options given below can be used. There is no method which is always best, and the choice depends not only on the function, but also on the values of the argument and the parameters.

rv_base.**set_pdf_method**(*pdf_method*)

Sets the method to be used for the calculation of the pdf. `pdf_method` can take the following values:

1. "direct": this is the default if a closed form of the cdf exists, otherwise returns `not implemented`.
2. "from_cdf": only for continuous functions for which the pdf is available in closed form, otherwise returns `not implemented`.
3. "from_charfunc": only for functions for which the characteristic is available in closed form, otherwise returns `not implemented`.
4. "from_edgeworth": only if at least the first 2 cumulants exist, otherwise returns `not implemented`.
5. "from_lug_rice": only if the cumulant generating function exists, otherwise returns `not implemented`.

There may be additional options for any particular function, which are documented in the decription of the function.

4.3.2 Probability sparsity function

rv_continuous.**psf**(x)

Returns $\text{psf}_X(x)$, the probability sparsity function (psf), which is the derivative of the quantile function (qtf).

See also Wikipedia [1132], Wikipedia [1124].

The probability sparsity function can be calculated using the probability density function (pdf) and the qtf:

$$\text{psf}_X(q) = \frac{\mathrm{d}}{\mathrm{d}q}\text{qtf}_X(q) = \frac{1}{\text{pdf}_X(\text{qtf}_X(q))}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

4.3.3 Differerential entropy

rv_continuous.**entropy**(x)

Returns entropy$_X(x)$, the differential entropy of a random variable X.

See also Wikipedia [1144]

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

4.3.4 Negative loglikelihood function

See also Wikipedia [1149]

rv_continuous.**nnlf**(x)

Returns nnlf$_X(x)$, the negative loglikelihood function of a random variable X:

$$\text{nnlf}_X(x) = -\sum(\log \text{pdf}_X(x, \theta), axis = 0),$$

where theta are the parameters (including loc and scale).

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

4.3.5 Logarithm of the probability density function

rv_continuous.**logpdf**(x)

Returns logpdf$_X(x)$, the logarithm of the probability density function (pdf) of a random variable X.

See also Wikipedia [1130]

$$\text{logpdf}_X(x) = \log(\text{pdf}_X(x))$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

4.4 Base class for discrete univariate distributions

class rv_discrete(*rv_base*)

The base discrete probability distribution class, which inherits from `rv_base`. There are no parameters and the support interval is $(-\infty, \infty)$.

The constructor has the following form:

```
class rv_continuous(rv_base):
    __a = -mp.inf
    __b = +mp.inf

    def __init__(self, df):
        pass
```

4.4.1 Probability mass function

rv_discrete.**pmf**(x)

Returns $\text{pmf}_X(x)$, the probability mass function (pmf) of a random variable X.

See also Wikipedia [1164].

There are various ways to calculate a pmf. Ideally, it is available in closed from and can be calculated directly, or there is are dedicated functions to calculate it. If this is not the case, then one of the options given below can be used. There is no method which is always best, and the choice depends not only on the function, but also on the values of the argument and the parameters.

rv_base.**set_pmf_method**(*pmf_method*)

Sets the method to be used for the calculation of the pmf. `pmf_method` can take the following values:

1. "direct": this is the default if a closed form of the cdf exists, otherwise returns `not implemented`.
2. "from_pmf_vector": only for discrete functions for which the pmf vector is available in polynomial time, otherwise returns `not implemented`.
3. "from_charfunc": only for functions for which the characteristic is available in closed form, otherwise returns `not implemented`.
4. "from_edgeworth": only if at least the first 2 cumulants exist, otherwise returns `not implemented`.
5. "from_lug_rice": only if the cumulant generating function exists, otherwise returns `not implemented`.

There may be additional options for any particular function, which are documented in the decription of the function.

4.4.2 Probability generating function

See also Wikipedia [1165].

rv_discrete.**pgf**(x)

Returns $\text{pgf}_X(x)$, the probability generating function (pgf) of a discrete random variable X.

See also Wikipedia [1165].

It is a power series representation (the generating function) of the probability mass function of the random variable.

If X is a discrete random variable taking values in the non-negative integers $\{0, 1, ...\}$, then the probability generating function of X is defined as

$$G(z) = \mathrm{E}(z^X) = \sum_{x=0}^{\infty} p(x) z^x,$$

where p is the probability mass function of X. Note that the subscripted notations G_X and p_X are often used to emphasize that these pertain to a particular random variable X, and to its distribution. The power series converges absolutely at least for all complex numbers z with $|z| \leq 1$; in many examples the radius of convergence is larger.

The probability-generating function is related to the moment-generating function by

$$G_X(e^t) = M_X(t); \quad G(t) = M_X(\log(t)).$$

There are various ways to calculate a pgf. Ideally, it is available in closed from and can be calculated directly, or there is are dedicated functions to calculate it. If this is not the case, then one of the options given below can be used. There is no method which is always best, and the choice depends not only on the function, but also on the values of the argument and the parameters.

`rv_base.`**`set_pgf_method`**(*pgf_method*)

Sets the method to be used for the calculation of the pgf. `pgf_method` can take the following values:

1. "direct": this is the default if a closed form of the cdf exists, otherwise returns `not implemented`.
2. "from_pmf_vector": only for discrete functions for which the pmf vector is available in polynomial time, otherwise returns `not implemented`.
3. "from_charfunc": only for functions for which the characteristic function is available in closed form, otherwise returns `not implemented`.
4. "from_mgf": only for functions for which the moment generating function is available in closed form, otherwise returns `not implemented`.
5. "from_mgf": only for functions for which the moment generating function is available in closed form, otherwise returns `not implemented`.

There may be additional options for any particular function, which are documented in the decription of the function.

4.4.3 Vector containing all values of the pmf

`rv_discrete.`**`pmfvec`**(x)

Returns a vector containing all values of the pmf. This is useful is such a vector is cheap to compute, and further operations (like convolutions) are required.

See also Wikipedia [1164].

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456 1356E+00
```

4.4.4 Entropy

`rv_discrete.`**`entropy`**(x)

Returns entropy$_X(x)$, the entropy of a random variable X.

See also Wikipedia [1144].

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456 1356E+00
```

4.4.5 Logarithm of the probability mass function

rv_discrete.**logpmf**(x)

Returns $\text{logpmf}_X(x)$, the logarithm of the probability mass function (pmf) of a random variable X.

See also Wikipedia [1164].

$$\text{logpmf}_X(x) = \log(\text{pmf}_X(x))$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

4.5 Closed form distributions, based on elementary functions

4.5.1 Boost: Arcsine Distribution

The following functions return the pdf, cdf, qtf or boost class of the arcsine distribution with endpoints $a \in \mathbb{R}$ and $b \in \mathbb{R}$, and the support interval (a, b).

See also Wikipedia [1140], BoostMath [50].

`math53.`**`arcsine_pdf`**(a, b, x)

Returns $\text{pdf}(x)$, the value of the probability density function (*Pdf*) of the arcsine distribution:

$$\text{pdf}(x) = \frac{1}{\pi\sqrt{(x-a)(b-x)}}.$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("ArcsinePdf(x, a, b): ", ArcsinePdf(x, a, b))
>>> print ("dist_arcsine(a, b).pdf(x): ", dist_arcsine(a, b).pdf(x))
6.356352346256452561561561561456 1356E+00
```

`math53.`**`arcsine_cdf`**(a, b, x)

Returns $\text{cdf}(x)$, the value of the cumulative distribution function (*Cdf*) of the arcsine distribution:

$$\text{cdf}(x) = \frac{2}{\pi}\arcsin\left(\sqrt{\frac{x-a}{b-a}}\right)$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("ArcsineCdf(x, a, b): ", ArcsineCdf(x, a, b))
>>> print ("dist_arcsine(a, b).cdf(x): ", dist_arcsine(a, b).cdf(x))
6.356352346256452561561561561456 1356E+00
```

`math53.`**`arcsine_qtf`**(a, b, q)

where `Ctx` is `Math53` or `CtxBoost`.

Returns $\text{qtf}(q)$, the value of the quantile function (*Qtf*) of the arcsine distribution:

$$\text{qtf}(q) = a + (b-a)\left(\sin\left(\tfrac{1}{2}\pi \cdot q\right)\right)^2$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("ArcsineQtf(q, a, b): ", ArcsineQtf(q, a, b))
>>> print ("dist_arcsine(a, b).qtf(q): ", dist_arcsine(a, b).qtf(q))
6.356352346256452561561561561456 1356E+00
```

class ctx.**dist_arcsine**(a, b)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The arcsine distribution is a continuous probability distribution with endpoints $a \in \mathbb{R}$ and $b \in \mathbb{R}$, $a < b$, and the support interval (a, b).

See also Wikipedia [1140], MathWorld [243], BoostMath [50], Witkovský [1455].

dist_arcsine.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following an arcsine distribution:

$$\mathrm{pdf}_X(x) = \frac{1}{\pi\sqrt{(x-a)(b-x)}}.$$

An example:

```
>>> from xlcalcnet import mpm
>>> mpm.dps = 30; a = '0'; b = '1'; x = '0.25'
>>> print ("pdf: ", mpm.dist_arcsine(a, b).pdf(x))
6.35635234625645256156156145613356E-20
```

dist_arcsine.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following an arcsine distribution:

$$\mathrm{cdf}_X(x) = \frac{2}{\pi}\arcsin\left(\sqrt{\frac{x-a}{b-a}}\right).$$

An example:

```
>>> from xlcalcnet import mpm
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", mpm.arcsine(mu, sigma).pdf(x))
6.35635234625645256156156145613356E-20
```

dist_arcsine.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following an arcsine distribution:

$$\mathrm{sf}_X(x) = \frac{2}{\pi}\arccos\left(\sqrt{\frac{x-a}{b-a}}\right).$$

An example:

```
>>> from xlcalcnet import mpm
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", mpm.arcsine(mu, sigma).pdf(x))
sf: 6.35635234625645256156156145613356E-20
```

dist_arcsine.**qtf**(q)

Returns $\mathrm{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following an arcsine distribution:

$$\mathrm{qtf}_X(q) = a + (b-a)\left(\sin\left(\tfrac{1}{2}\pi \cdot q\right)\right)^2$$

```
>>> from xlcalcnet import mpm
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", mpm.arcsine(mu, sigma).qtf(q))
qtf: 6.356352346256452561561561561456 1356E+00
```

dist_arcsine.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following an arcsine distribution:

$$\text{isf}_X(q) = a + (b-a)\left(\cos\left(\tfrac{1}{2}\pi \cdot q\right)\right)^2$$

```
>>> from xlcalcnet import mpm
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", mpm.arcsine(mu, sigma).isf(q))
6.356352346256452561561561561456 1356E+00
```

dist_arcsine.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following an arcsine distribution:

$$C_X(t) = {}_1F_1\left(\frac{1}{2}; 1; it\right).$$

```
>>> from xlcalcnet import mpm
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", mpm.arcsine(mu, sigma).c_x(t))
6.356352346256452561561561561456 1356E+00
```

dist_arcsine.**m_x**(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following an arcsine distribution:

$$M_X(t) = {}_1F_1\left(\frac{1}{2}; 1; t\right).$$

```
>>> from xlcalcnet import mpm
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("m_x: ", mpm.arcsine(mu, sigma).m_x(t))
6.356352346256452561561561561456 1356E+00
```

dist_arcsine.**k_x**(t, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following an arcsine distribution:

$$K_X(t) = \log\left[{}_1F_1\left(\frac{1}{2}; 1; t\right)\right].$$

```
>>> from xlcalcnet import mpm
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("k_x: ", mpm.arcsine(mu, sigma).k_x(t, k))
6.356352346256452561561561561456 1356E+00
```

dist_arcsine.**moments**(k)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following an arcsine distribution:

$$\mu'_X(r) = \prod_{j=0}^{n-1} \frac{2j+1}{2j+2}.$$

```
>>> from xlcalcnet import mpm
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("moments: ", mpm.arcsine(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_arcsine.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following an arcsine distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import mpm
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("cumulants: ", mpm.arcsine(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

4.5.2 Boost: Cauchy distribution

The following functions return the pdf, cdf, qtf or boost class of the Cauchy distribution with parameters $a \in \mathbb{R}$ (location), $b > 0$ (scale), and the support interval $(-\infty, +\infty)$.

See also Wikipedia [1142], MathWorld [813], BoostMath [52], Ehrhardt [295] (3.9.4).

`math53.cauchy_pdf`(a, b, x)

Returns pdf(x), the value of the probability density function (*Pdf*) of the Cauchy distribution:

$$\text{pdf}(x) = \frac{1}{\pi b(1 + ((x-a)/b)^2)}.$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("CauchyPdf(x, a, b): ", CauchyPdf(x, a, b))
>>> print ("dist_cauchy(a, b).pdf(x): ", dist_cauchy(a, b).pdf(x))
6.35635234625645256156156145613 56E+00
```

`math53.cauchy_cdf`(a, b, x)

Returns cdf(x), the value of the cumulative distribution function (*Cdf*) of the Cauchy distribution:

$$\text{cdf}(x) = \frac{1}{2} + \frac{1}{\pi}\arctan\left(\frac{x-a}{b}\right).$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("CauchyCdf(x, a, b): ", CauchyCdf(x, a, b))
>>> print ("dist_cauchy(a, b).cdf(x): ", dist_cauchy(a, b).cdf(x))
6.35635234625645256156156145613 56E+00
```

`math53.cauchy_qtf`(a, b, q)

Returns qtf(q), the value of the quantile function (*Qtf*) of the Cauchy distribution:

$$\text{qtf}(q) = \begin{cases} a - b/\tan(\pi q), & q < 0.5, \\ a, & q = 0.5, \\ a - b/\tan(\pi(1-q)) & q > 0.5. \end{cases}$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("CauchyQtf(q, a, b): ", CauchyQtf(q, a, b))
>>> print ("dist_cauchy(a, b).qtf(q): ", dist_cauchy(a, b).qtf(q))
6.35635234625645256156156145613 56E+00
```

class `ctx.dist_cauchy`(a, b)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

The Cauchy distribution is a continuous probability distribution with parameters $a \in \mathbb{R}$ (location), $b > 0$ (scale), and the support interval $(-\infty, +\infty)$. See also Wikipedia [1142], MathWorld [813], BoostMath [52], R (Statistical System) [518].

dist_cauchy.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a Cauchy distribution:

$$\text{pdf}_X(x) = \frac{1}{\pi(1 + ((x-a)/b)^2)}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", cauchy(mu, sigma).pdf(x))
6.356352346256452561561561456135 6E-20
```

dist_cauchy.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a Cauchy distribution:

$$\text{cdf}_X(x) = \frac{1}{2} + \frac{1}{\pi}\arctan\left(\frac{x-a}{b}\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", cauchy(mu, sigma).pdf(x))
6.356352346256452561561561456135 6E-20
```

dist_cauchy.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function (sf) of a random variable X, following a Cauchy distribution:

$$\text{sf}_X(x) = 1 - \text{cdf}_X(x) = \frac{1}{2} - \frac{1}{\pi}\arctan\left(\frac{x-a}{b}\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", cauchy(mu, sigma).pdf(x))
sf: 6.356352346256452561561561456135 6E-20
```

dist_cauchy.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following a Cauchy distribution:

$$\text{qtf}_X(q) = \begin{cases} a - b/\tan(\pi q), & q < 0.5, \\ a, & q = 0.5, \\ a - b/\tan(\pi(1-q)) & q > 0.5. \end{cases}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", cauchy(mu, sigma).qtf(q))
qtf: 6.356352346256452561561561456135 6E+00
```

dist_cauchy.**isf**(q)

Returns $\mathrm{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following a Cauchy distribution:

$$\mathrm{isf}_X(q) = \begin{cases} a + b/\tan(\pi q), & q < 0.5, \\ a, & q = 0.5, \\ a + b/\tan(\pi(1-q)) & q > 0.5. \end{cases}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", cauchy(mu, sigma).isf(q))
6.356352346256452561561561561456 1356E+00
```

dist_cauchy.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following a Cauchy distribution:

$$C_X(t) = \exp(a \cdot it - b|t|).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", cauchy(mu, sigma).c_x(t))
6.356352346256452561561561561456 1356E+00
```

dist_cauchy.**m_x**(t)

Returns NaN, since the moment generating function does not exist.

dist_cauchy.**k_x**(t, *k=0*)

Returns NaN, since the cumulant generating function does not exist.

dist_cauchy.**moments**(k)

Returns NaN, since moments do not exist.

dist_cauchy.**cumulants**(k)

Returns NaN, since cumulants do not exist.

4.5.3 Boost: Exponential distribution

The following functions return the pdf, cdf, qtf or boost class of the distribution with rate parameter $\lambda_1 > 0$ and the support interval $(0, +\infty)$.

See also Wikipedia [1145], MathWorld [815], BoostMath [54], Ehrhardt [295] (3.9.7).

`math53.`**`exponential_pdf`**(*lambda1*, *x*)

Returns pdf(x), the value of the probability density function (*Pdf*) of the exponential distribution:

$$\text{pdf}(x) = \lambda_1 \exp(-\lambda_1 x).$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("ExponentialPdf(x, a, b): ", ExponentialPdf(x, a, b))
>>> print ("dist_exponential(a, b).pdf(x): ", dist_exponential(a, b).pdf(x))
6.35635234625645256156156145613 56E+00
```

`math53.`**`exponential_cdf`**(*lambda1*, *x*)

Returns cdf(x), the value of the cumulative distribution function (*Cdf*) of the exponential distribution:

$$\text{cdf}(x) = 1 - \exp(-\lambda_1 x) = -\text{expm1}(-\lambda_1 x).$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("ExponentialCdf(x, a, b): ", ExponentialCdf(x, a, b))
>>> print ("dist_exponential(a, b).cdf(x): ", dist_exponential(a, b).cdf(x))
6.35635234625645256156156145613 56E+00
```

`math53.`**`exponential_qtf`**(*lambda1*, *q*)

Returns qtf(q), the value of the quantile function (*Qtf*) of the exponential distribution:

$$\text{qtf}(q) = -\text{log1p}(-q)/\lambda_1.$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("ExponentialQtf(q, a, b): ", ExponentialQtf(q, a, b))
>>> print ("dist_exponential(a, b).qtf(q): ", dist_exponential(a, b).qtf(q))
6.35635234625645256156156145613 56E+00
```

`class` `ctx.`**`dist_exponential`**(*lambda1*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

The exponential distribution is a continuous probability distribution with rate parameter $\lambda_1 > 0$, and the support interval $[0, +\infty)$. See also Wikipedia [1145], MathWorld [815], BoostMath [54], Witkovský [1458], R (Statistical System) [520].

dist_exponential.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following an exponential distribution:

$$\text{pdf}_X(x) = \lambda_1 \exp(-\lambda_1 x).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", exponential(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_exponential.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following an exponential distribution:

$$\text{cdf}_X(x) = 1 - \exp(-\lambda_1 x) = -\text{expm1}(-\lambda_1 x).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", exponential(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_exponential.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function (sf) of a random variable X, following an exponential distribution:

$$\text{sf}_X(x) = \exp(-\lambda_1 x).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", exponential(mu, sigma).pdf(x))
sf: 6.35635234625645256156156145613 56E-20
```

dist_exponential.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following an exponential distribution:

$$\text{qtf}_X(q) = -\text{log1p}(-q)/\lambda_1.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", exponential(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_exponential.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following an exponential distribution:

$$\text{isf}_X(q) = -\log(q)/\lambda_1.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", exponential(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_exponential.**c_x**(*t*)

Returns $C_X(t)$, the characteristic function of a random variable X, following an exponential distribution:

$$C_X(t) = \frac{\lambda}{\lambda - it}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", exponential(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_exponential.**m_x**(*t*)

Returns $M_X(t)$, the moment generating function of a random variable X, following an exponential distribution:

$$M_X(t) = \frac{\lambda}{\lambda - t}, \quad \text{for } t < \lambda.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("m_x: ", exponential(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_exponential.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following an exponential distribution:

$$K_X(t) = \log\left(\frac{\lambda}{\lambda - t}\right), \quad \text{for } t < \lambda.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", exponential(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

dist_exponential.**moments**(*k*)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following an exponential distribution. The rth moments only exists for $n_2 > 2r$.

$$\mu'_X(n) = \frac{n!}{\lambda^n}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", exponential(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_exponential.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following an exponential distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", exponential(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

4.5.4 Boost: Gumbel (Generalized Extreme Value distribution Type-I) distribution

The following functions return the pdf, cdf, qtf or boost class of the Gumbel distribution with parameters $a \in \mathbb{R}$ (location), $b > 0$ (scale), and the support interval $(-\infty, +\infty)$.

See also Wikipedia [1148], MathWorld [818], BoostMath [55], Ehrhardt [295] (3.9.8).

`math53.gumbel_pdf`(a, b, x)

Returns pdf(x), the value of the probability density function (*Pdf*) of the Gumbel distribution:

$$\text{pdf}(x) = \frac{e^{-(x-a)/b}}{b} e^{-e^{-(x-a)/b}}.$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("GumbelPdf(x, a, b): ", GumbelPdf(x, a, b))
>>> print ("dist_gumbel(a, b).pdf(x): ", dist_gumbel(a, b).pdf(x))
6.35635234625645256156156145613 56E+00
```

`math53.gumbel_cdf`(a, b, x)

Returns cdf(x), the value of the cumulative distribution function (*Cdf*) of the Gumbel distribution:

$$\text{cdf}(x) = e^{-e^{-(x-a)/b}}.$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("GumbelCdf(x, a, b): ", GumbelCdf(x, a, b))
>>> print ("dist_gumbel(a, b).cdf(x): ", dist_gumbel(a, b).cdf(x))
6.35635234625645256156156145613 56E+00
```

`math53.gumbel_qtf`(a, b, q)

Returns qtf(q), the value of the quantile function (*Qtf*) of the Gumbel distribution:

$$\text{qtf}(q) = a - b\log(-\log(q)).$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("GumbelQtf(q, a, b): ", GumbelQtf(q, a, b))
>>> print ("dist_gumbel(a, b).qtf(q): ", dist_gumbel(a, b).qtf(q))
6.35635234625645256156156145613 56E+00
```

class `ctx.dist_gumbel`(a, b)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

The Gumbel (or Extreme Value Type I)distribution is a continuous probability distribution with parameters $a \in \mathbb{R}$ (location), $b > 0$ (scale), and the support interval $(-\infty, +\infty)$.

See also Wikipedia [1148], MathWorld [818], BoostMath [55], Witkovský [1461].

Note: In MathWorld/Mathematica, the Gumbel (Maximum) distribution is called the ExtremeValueDistribution, and the Gumbel (Minimum) distribution is called the GumbelDistribution.

dist_gumbel.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following an Gumbel distribution:

$$\mathrm{pdf}_X(x) = \frac{e^{-(x-a)/b}}{b} e^{e^{-(x-a)/b}}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", gumbel(mu, sigma).pdf(x))
6.356352346256452561561561456135 6E-20
```

dist_gumbel.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following an Gumbel distribution:

$$\mathrm{cdf}_X(x) = e^{e^{-(x-a)/b}}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", gumbel(mu, sigma).pdf(x))
6.356352346256452561561561456135 6E-20
```

dist_gumbel.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following an Gumbel distribution:

$$\mathrm{sf}_X(x) = 1 - e^{e^{-(x-a)/b}} = -\mathrm{expm1}(-e^{-(x-a)/b}).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", gumbel(mu, sigma).pdf(x))
sf: 6.356352346256452561561561456135 6E-20
```

dist_gumbel.**qtf**(q)

Returns $\mathrm{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following an Gumbel distribution:

$$\mathrm{qtf}_X(q) = a - b\log(-\log(q)).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", gumbel(mu, sigma).qtf(q))
qtf: 6.356352346256452561561561456135 6E+00
```

dist_gumbel.**isf**(*q*)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following an Gumbel distribution:

$$\text{isf}_X(q) = a - b\log(-\text{log1p}(-q)).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", gumbel(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_gumbel.**c_x**(*t*)

Returns $C_X(t)$, the characteristic function of a random variable X, following an Gumbel distribution:

$$C_X(t) = \Gamma(1 - ibt)e^{iat}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", gumbel(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_gumbel.**m_x**(*t*)

Returns $M_X(t)$, the moment generating function of a random variable X, following an Gumbel distribution:

$$M_X(t) = \Gamma(1 - bt)e^{at}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("m_x: ", gumbel(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_gumbel.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following an Gumbel distribution:

$$K_X(t) = at + \log(\Gamma(1 - bt)).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", gumbel(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

dist_gumbel.**moments**(*k*)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following an Gumbel distribution. The moments are calculated from the cumulants.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", gumbel(mu, sigma).moments(k))
6.356352346256452561561561561456l356E+00
```

dist_gumbel.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following an Gumbel distribution:

$$\kappa'_X(n) = (n-1)!\zeta(n).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", gumbel(mu, sigma).cumulants(k))
6.356352346256452561561561561456l356E+00
```

4.5.5 Boost: Hyperexponential Distribution

The following functions return pdf, cdf, qtf or boost class of the hyperexponential distribution with weights $w_j > 0$, rate parameters $\lambda_j > 0$, $j = 1 \ldots k$, and the support interval $(0, +\infty)$. The weights are interpreted as relative weights, to ensure that $\sum_{j=1}^{k} w_j = 1$.

See also Wikipedia [1173], MathWorld [249], BoostMath [77].

`math53.`**`hyperexponential_pdf`**(*lambdaj*, *wj*, *x*)

Returns pdf(x), the value of the probability density function (*Pdf*) of the hyperexponential distribution:

$$\text{pdf}(x) = \sum_{j=1}^{k} w_j \cdot \lambda_j e^{-\lambda_j x}.$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("HyperexpPdf(x, a, b): ", HyperexpPdf(x, a, b))
>>> print ("dist_hyperexponential(a, b).pdf(x): ", dist_hyperexponential(a, b).pdf(x))
6.356352346256452561561561561456 1356E+00
```

`math53.`**`hyperexponential_cdf`**(*lambdaj*, *wj*, *x*)

Returns cdf(x), the value of the cumulative distribution function (*Cdf*) of the hyperexponential distribution:

$$\text{cdf}(x) = \sum_{j=1}^{k} w_j(1 - e^{-\lambda_j x}) = -\sum_{j=1}^{k} w_j \cdot \text{expm1}(-\lambda_j x).$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("HyperexpCdf(x, a, b): ", HyperexpCdf(x, a, b))
>>> print ("dist_hyperexponential(a, b).cdf(x): ", dist_hyperexponential(a, b).cdf(x))
6.356352346256452561561561561456 1356E+00
```

`math53.`**`hyperexponential_qtf`**(*lambdaj*, *wj*, *q*)

Returns qtf(q), the value of the quantile function (*Qtf*) of the hyperexponential distribution:

There is no known closed form for qtf(q). The function is computed with the starting value $x_0 = -\text{log1p}(-q) \sum_{j=1}^{k}(w_j/\lambda_j)$ using Newton iterations.

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("HyperexpQtf(q, a, b): ", HyperexpQtf(q, a, b))
>>> print ("dist_hyperexponential(a, b).qtf(q): ", dist_hyperexponential(a, b).qtf(q))
6.356352346256452561561561561456 1356E+00
```

`class` `ctx.`**`dist_hyperexponential`**(*wj*, *lambdaj*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

The hyperexponential distribution is a continuous probability mixture distribution with weights $w_j > 0$, rate parameters $\lambda_j > 0$, $j = 1 \ldots k$, and the support interval $(0, +\infty)$. The weights are interpreted as relative weights, to ensure that $\sum_{j=1}^{k} w_j = 1$.

It is called the hyperexponential distribution as it has a coefficient of variation greater than one, compared to the hypoexponential distribution which has coefficient of variation less than one and the exponential distribution which has coefficient of variation of one.

See also Wikipedia [1173], MathWorld [249], BoostMath [77].

`dist_hyperexponential.`**`pdf`**`(`x`)`

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a hyperexponential distribution:

$$\mathrm{pdf}_X(x) = \sum_{j=1}^{k} w_j \cdot \lambda_j e^{-\lambda_j x}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", mp_hyperexponential(mu, sigma).pdf(x))
6.356352346256452561561561561456135 6E-20
```

`dist_hyperexponential.`**`cdf`**`(`x`)`

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a hyperexponential distribution:

$$\mathrm{cdf}_X(x) = \sum_{j=1}^{k} w_j(1 - e^{-\lambda_j x}) = -\sum_{j=1}^{k} w_j \cdot \mathrm{expm1}(-\lambda_j x).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", mp_hyperexponential(mu, sigma).pdf(x))
6.356352346256452561561561561456135 6E-20
```

`dist_hyperexponential.`**`sf`**`(`x`)`

Returns $\mathrm{sf}_X(x)$, the survival function function (sf) of a random variable X, following a hyperexponential distribution:

$$\mathrm{sf}_X(x) = 1 - \sum_{j=1}^{k} w_j(1 - e^{-\lambda_j x}) = \sum_{j=1}^{k} w_j \cdot \exp(-\lambda_j x).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", mp_hyperexponential(mu, sigma).pdf(x))
sf: 6.356352346256452561561561561456135 6E-20
```

`dist_hyperexponential.`**`qtf`**`(`q`)`

Returns $\mathrm{qtf}_X(x)$, the quantile function function (qtf) of a random variable X, following a hyperexponential distribution.

There is no known closed form for $\mathrm{qtf}_X(q)$. The function is computed with the starting value $x_0 = -\mathrm{log1p}(-q)\sum_{j=1}^{k}(w_j/\lambda_j)$ using Newton iterations.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", mp_hyperexponential(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_hyperexponential.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function function (isf) of a random variable X, following a hyperexponential distribution.

There is no known closed form for $\text{isf}_X(q)$. The function is computed with the starting value $x_0 = -\log(q)\sum_{j=1}^{k}(w_j/\lambda_j)$ using Newton iterations.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", mp_hyperexponential(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_hyperexponential.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following a hyperexponential distribution:

$$C_X(t) = \sum_{j=1}^{k} w_j \frac{\lambda_j}{\lambda_j - it}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", mp_hyperexponential(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_hyperexponential.**m_x**(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following a hyperexponential distribution:

$$M_X(t) = \sum_{j=1}^{k} w_j \frac{\lambda_j}{\lambda_j - t}, \quad \text{for } \min(\lambda_j) > t.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", mp_hyperexponential(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_hyperexponential.**k_x**(t, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following a hyperexponential distribution:

$$K_X(t) = \log\left[\sum_{j=1}^{k} w_j \frac{\lambda_j}{\lambda_j - t}\right], \quad \text{for } \min(\lambda_j) > t.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", mp_hyperexponential(mu, sigma).k_x(t, k))
6.356352346256452561561561561456 1356E+00
```

dist_hyperexponential.**moments**(k)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following a hyperexponential distribution:

$$\mu_X(r) = r! \sum_{j=1}^{k} \frac{w_j}{\lambda_j^r}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", mp_hyperexponential(mu, sigma).moments(k))
6.356352346256452561561561561456 1356E+00
```

dist_hyperexponential.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following a hyperexponential distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", mp_hyperexponential(mu, sigma).cumulants(k))
6.356352346256452561561561561456 1356E+00
```

4.5.6 !!!Boost: Kumaraswamy distribution

The following functions return pdf, cdf, qtf or boost class of the Kumaraswamy distribution with shape parameters $a > 0$, $b > 0$, and the support interval $(0, 1)$.

See also Wikipedia [1178], MathWorld [252], Ehrhardt [295] (3.9.13).

See also: https://stats.stackexchange.com/questions/171952/parameter-estimation-for-kumaraswamy-distribution

See also: https://www.johndcook.com/blog/2009/11/24/kumaraswamy-distribution/

`math53.`**`kumaraswamy_pdf`**(a, b, x)

Returns pdf(x), the value of the probability density function (*Pdf*) of the Kumaraswamy distribution:

$$\text{pdf}(x) = abx^{a-1}(1-x^a)^{b-1} = abx^{a-1} \cdot (-\text{powm1}(x, a))^{b-1}.$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("KumaraswamyPdf(x, a, b): ", KumaraswamyPdf(x, a, b))
>>> print ("dist_kumaraswamy(a, b).pdf(x): ", dist_kumaraswamy(a, b).pdf(x))
6.35635234625645256156156145613 56E+00
```

`math53.`**`kumaraswamy_cdf`**(a, b, x)

Returns cdf(x), the value of the cumulative distribution function (*Cdf*) of the Kumaraswamy distribution:

$$\text{cdf}(x) = 1 - (1-x^a)^b = -\text{powm1}(-\text{powm1}(x, a), b).$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("KumaraswamyCdf(x, a, b): ", KumaraswamyCdf(x, a, b))
>>> print ("dist_kumaraswamy(a, b).cdf(x): ", dist_kumaraswamy(a, b).cdf(x))
6.35635234625645256156156145613 56E+00
```

`math53.`**`kumaraswamy_qtf`**(a, b, q)

Returns qtf(q), the value of the quantile function (*Qtf*) of the Kumaraswamy distribution:

$$\text{qtf}(q) = (1-(1-q)^{\frac{1}{b}})^{\frac{1}{a}} = \text{pow}(-\text{pow1pm1}(-q, 1/b), 1/a).$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("KumaraswamyQtf(q, a, b): ", KumaraswamyQtf(q, a, b))
>>> print ("dist_kumaraswamy(a, b).qtf(q): ", dist_kumaraswamy(a, b).qtf(q))
6.35635234625645256156156145613 56E+00
```

`class` `ctx.`**`dist_kumaraswamy`**(a, b)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

The Kumaraswamy distribution is a continuous probability distribution with shape parameters $a > 0$, $b > 0$, and the support interval $(0, 1)$. See also Wikipedia [1178], MathWorld [252].

dist_kumaraswamy.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following an Kumaraswamy distribution:

$$\text{pdf}_X(x) = abx^{a-1}(1-x^a)^{b-1} = abx^{a-1} \cdot (-\text{powm1}(x,a))^{b-1}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", mp_kumaraswamy(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_kumaraswamy.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following an Kumaraswamy distribution:

$$\text{cdf}_X(x) = 1-(1-x^a)^b = -\text{powm1}(-\text{powm1}(x,a),b).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", mp_kumaraswamy(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_kumaraswamy.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function function (sf) of a random variable X, following an Kumaraswamy distribution:

$$\text{sf}_X(x) = (1-x^a)^b = \text{pow}(-\text{powm1}(x,a),b).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", mp_kumaraswamy(mu, sigma).pdf(x))
sf: 6.35635234625645256156156145613 56E-20
```

dist_kumaraswamy.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function function (qtf) of a random variable X, following an Kumaraswamy distribution:

$$\text{qtf}_X(q) = (1-(1-q)^{\frac{1}{b}})^{\frac{1}{a}} = \text{pow}(-\text{pow1pm1}(-q,1/b),1/a).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", mp_kumaraswamy(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_kumaraswamy.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function function (isf) of a random variable X, following an Kumaraswamy distribution:

$$\text{isf}_X(q) = (1-q^{\frac{1}{b}})^{\frac{1}{a}} = \text{pow}(-\text{powm1}(q,1/b),1/a).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", mp_kumaraswamy(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_kumaraswamy.**c_x**(*t*)

Returns $C_X(t)$, the characteristic function of a random variable X, following an Kumaraswamy distribution:

$$C_X(t) = tbd$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", mp_kumaraswamy(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_kumaraswamy.**m_x**(*t*)

Returns $M_X(t)$, the moment generating function of a random variable X, following an Kumaraswamy distribution:

$$M_X(t) = tbd$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("m_x: ", mp_kumaraswamy(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_kumaraswamy.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following an Kumaraswamy distribution:

$$K_X(t) = tbd$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", mp_kumaraswamy(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

dist_kumaraswamy.**moments**(*k*)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following an Kumaraswamy distribution (Wikipedia). The central moments are calculated from the raw moments.

$$\mu_X(r) = \frac{b\Gamma(1 + n/a)\Gamma(b)}{\Gamma(1 + b + n/a)} = bB(1 + n/a, b).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", mp_kumaraswamy(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_kumaraswamy.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following an Kumaraswamy distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", mp_kumaraswamy(mu, sigma).cumulants(k))
6.35635234625645256156156145561356E+00
```

4.5.7 Boost: Laplace distribution

The following functions return the pdf, cdf, qtf or boost class of the Laplace distribution with parameters $a \in \mathbb{R}$ (location), $b > 0$ (scale), and the support interval $(-\infty, +\infty)$.

See also Wikipedia [1152], MathWorld [822], BoostMath [60], Ehrhardt [295] (3.9.15).

`math53.laplace_pdf`(a, b, x)

Returns pdf(x), the value of the probability density function (*Pdf*) of the Laplace distribution:

$$\text{pdf}(x) = \exp(-|x - a|/b)/(2b).$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("LaplacePdf(x, a, b): ", LaplacePdf(x, a, b))
>>> print ("dist_laplace(a, b).pdf(x): ", dist_laplace(a, b).pdf(x))
6.356352346256452561561561561456135 6E+00
```

`math53.laplace_cdf`(a, b, x)

Returns cdf(x), the value of the cumulative distribution function (*Cdf*) of the Laplace distribution:

$$\text{cdf}(x) = \begin{cases} \frac{1}{2} - \frac{1}{2}\text{expm1}\left(-\frac{x-a}{b}\right) & x \geq a \\ \frac{1}{2}\exp\left(-\frac{x-a}{b}\right) & x < a. \end{cases}$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("LaplaceCdf(x, a, b): ", LaplaceCdf(x, a, b))
>>> print ("dist_laplace(a, b).cdf(x): ", dist_laplace(a, b).cdf(x))
6.356352346256452561561561561456135 6E+00
```

`math53.laplace_qtf`(a, b, q)

Returns qtf(q), the value of the quantile function (*Qtf*) of the Laplace distribution:

$$\text{qtf}(q) = \begin{cases} a + b\ \log(2q), & q \leq 0.5, \\ a - b\ \log(2(1-q)) & q > 0.5. \end{cases}$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("LaplaceQtf(q, a, b): ", LaplaceQtf(q, a, b))
>>> print ("dist_laplace(a, b).qtf(q): ", dist_laplace(a, b).qtf(q))
6.356352346256452561561561561456135 6E+00
```

class `ctx.dist_laplace`(a, b)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

The Laplace distribution is a continuous probability distribution with parameters $a \in \mathbb{R}$ (location), $b > 0$ (scale), and the support interval $(-\infty, +\infty)$. See also Wikipedia [1152], MathWorld [822], BoostMath [60], Witkovský [1464].

dist_laplace.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following an Laplace distribution:

$$\text{pdf}_X(x) = \exp(-|x-a|/b)/(2b).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", laplace(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_laplace.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following an Laplace distribution:

$$\text{cdf}_X(x) = \begin{cases} \frac{1}{2} - \frac{1}{2}\text{expm1}\left(-\frac{x-a}{b}\right) & x \geq a \\ \frac{1}{2}\exp\left(-\frac{x-a}{b}\right) & x < a. \end{cases}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", laplace(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_laplace.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function (sf) of a random variable X, following an Laplace distribution:

$$\text{sf}_X(x) = \begin{cases} \frac{1}{2} + \frac{1}{2}\text{expm1}\left(-\frac{x-a}{b}\right) & x \geq a \\ 1 - \frac{1}{2}\exp\left(-\frac{x-a}{b}\right) & x < a. \end{cases}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", laplace(mu, sigma).pdf(x))
sf: 6.3563523462564525615615615614561356E-20
```

dist_laplace.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following an Laplace distribution:

$$\text{qtf}_X(q) = \begin{cases} a + b\ \log(2q), & q \leq 0.5, \\ a - b\ \log(2(1-q)) & q > 0.5. \end{cases}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", laplace(mu, sigma).qtf(q))
qtf: 6.3563523462564525615615615614561356E+00
```

dist_laplace.**isf**(*q*)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following an Laplace distribution:

$$\text{isf}_X(q) = \begin{cases} a - b\ \log(2q), & q \leq 0.5, \\ a + b\ \log(2(1-q)) & q > 0.5. \end{cases}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", laplace(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_laplace.**c_x**(*t*)

Returns $C_X(t)$, the characteristic function of a random variable X, following an Laplace distribution:

$$C_X(t) = \frac{e^{iat}}{1 - b^2t^2}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", laplace(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_laplace.**m_x**(*t*)

Returns $M_X(t)$, the moment generating function of a random variable X, following an Laplace distribution:

$$M_X(t) = \frac{e^{at}}{1 - b^2t^2}.$$

```

```

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("m_x: ", laplace(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_laplace.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following an Laplace distribution:

$$K_X(t) = at - \log(1 - b^2t^2.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("k_x: ", laplace(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

dist_laplace.**moments**(k)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following an Laplace distribution. The moments are calculated from the cumulants.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", laplace(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_laplace.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following an Laplace distribution. The cumulants are calculated from the moments.

$$\kappa_X(r) = \begin{cases} a & r = 1 \\ 0 & r = 2k+1; k = 0, 1, \ldots \\ b^r 2(r-1)! & r = 2k; k = 0, 1, \ldots \end{cases}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", laplace(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

4.5.8 Boost: Logistic distribution

The following functions return the pdf, cdf, qtf or boost class of the logistic distribution with parameters $a \in \mathbb{R}$ (location), $b > 0$ (scale), and the support interval $(-\infty, +\infty)$.

See also Wikipedia [1154], MathWorld [825], BoostMath [62], Ehrhardt [295] (3.9.18).

`math53.logistic_pdf`(a, b, x)

Returns pdf(x), the value of the probability density function (*Pdf*) of the logistic distribution:

$$\text{pdf}(x) = \frac{1}{b} \frac{\exp\left(-\frac{x-a}{b}\right)}{\left(1+\exp\left(-\frac{x-a}{b}\right)\right)^2}.$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("LogisticPdf(x, a, b): ", LogisticPdf(x, a, b))
>>> print ("dist_logistic(a, b).pdf(x): ", dist_logistic(a, b).pdf(x))
6.356352346256452561561561561456l356E+00
```

`math53.logistic_cdf`(a, b, x)

Returns cdf(x), the value of the cumulative distribution function (*Cdf*) of the logistic distribution:

$$\text{cdf}(x) = \frac{1}{1+\exp\left(-\frac{x-a}{b}\right)}.$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("LogisticCdf(x, a, b): ", LogisticCdf(x, a, b))
>>> print ("dist_logistic(a, b).cdf(x): ", dist_logistic(a, b).cdf(x))
6.356352346256452561561561561456l356E+00
```

`math53.logistic_qtf`(a, b, q)

Returns qtf(q), the value of the quantile function (*Qtf*) of the logistic distribution:

$$\text{qtf}(q) = a + b \log\left(\frac{q}{1-q}\right).$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("LogisticQtf(q, a, b): ", LogisticQtf(q, a, b))
>>> print ("dist_logistic(a, b).qtf(q): ", dist_logistic(a, b).qtf(q))
6.356352346256452561561561561456l356E+00
```

class `ctx.dist_logistic`(a, b)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

The logistic distribution is a continuous probability distribution with parameters $a \in \mathbb{R}$ (location), $b > 0$ (scale), and the support interval $(-\infty, +\infty)$. See also Wikipedia [1154], MathWorld [825], BoostMath [62].

dist_logistic.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following an logistic distribution:

$$\text{pdf}_X(x) = \frac{1}{b} \frac{\exp\left(-\frac{x-a}{b}\right)}{\left(1+\exp\left(-\frac{x-a}{b}\right)\right)^2}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", logistic(mu, sigma).pdf(x))
6.356352346256452561561561456135 6E-20
```

dist_logistic.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following an logistic distribution:

$$\text{cdf}_X(x) = \frac{1}{1+\exp\left(-\frac{x-a}{b}\right)}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", logistic(mu, sigma).pdf(x))
6.356352346256452561561561456135 6E-20
```

dist_logistic.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function (sf) of a random variable X, following an logistic distribution:

$$\text{sf}_X(x) = \frac{1}{1+\exp\left(\frac{x-a}{b}\right)}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", logistic(mu, sigma).pdf(x))
sf: 6.356352346256452561561561456135 6E-20
```

dist_logistic.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following an logistic distribution:

$$\text{qtf}_X(q) = a + b\ \log\left(\frac{q}{1-q}\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", logistic(mu, sigma).qtf(q))
qtf: 6.356352346256452561561561456135 6E+00
```

dist_logistic.**isf**(*q*)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following an logistic distribution:

$$\text{isf}_X(q) = a - b \log\left(\frac{q}{1-q}\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", logistic(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_logistic.**c_x**(*t*)

Returns $C_X(t)$, the characteristic function of a random variable X, following an logistic distribution:

$$C_X(t) = e^{ita}\frac{\pi bt}{\sinh(\pi bt)}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", logistic(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_logistic.**m_x**(*t*)

Returns $M_X(t)$, the moment generating function of a random variable X, following an logistic distribution:

$$M_X(t) = e^{ta}\frac{\pi bt}{\sinh(\pi bt)}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("m_x: ", logistic(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_logistic.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following an logistic distribution:

$$K_X(t) = ta + \log(\pi bt) - \log(\sinh(\pi bt)).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", logistic(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

dist_logistic.**moments**(k)

Returns the first j central moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following an logistic distribution (Wikipedia). The raw moments are calculated from the central moments.

$$\mu_X(n) = b^n \pi^n (2^n - 2) \cdot |B_n|.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", logistic(mu, sigma).moments(k))
6.356352346256452561561561456135 6E+00
```

dist_logistic.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following an logistic distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", logistic(mu, sigma).cumulants(k))
6.356352346256452561561561456135 6E+00
```

4.5.9 Boost: Pareto distribution

The following functions return pdf, cdf, qtf or boost class of the Pareto distribution with minimum (real) value $k > 0$, shape $a > 0$, and the support interval $(k, +\infty)$.

See also Wikipedia [1162], MathWorld [830], BoostMath [68], Ehrhardt [295] (3.9.25).

`math53.pareto_pdf`(k, a, x)

Returns pdf(x), the value of the probability density function (*Pdf*) of the Pareto distribution:

$$\text{pdf}(x) = \frac{a}{x}\left(\frac{k}{x}\right)^a.$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("ParetoPdf(x, a, b): ", ParetoPdf(x, a, b))
>>> print ("dist_pareto(a, b).pdf(x): ", dist_pareto(a, b).pdf(x))
6.356352346256452561561561456135 6E+00
```

`math53.pareto_cdf`(k, a, x)

Returns cdf(x), the value of the cumulative distribution function (*Cdf*) of the Pareto distribution:

$$\text{cdf}(x) = 1 - \left(\frac{k}{x}\right)^a = -\text{powm1}(k/x, a).$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("ParetoCdf(x, a, b): ", ParetoCdf(x, a, b))
>>> print ("dist_pareto(a, b).cdf(x): ", dist_pareto(a, b).cdf(x))
6.356352346256452561561561456135 6E+00
```

`math53.pareto_qtf`(k, a, q)

Returns qtf(q), the value of the quantile function (*Qtf*) of the Pareto distribution:

$$\text{qtf}(q) = \frac{k}{(1-q)^{1/a}}.$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("ParetoQtf(q, a, b): ", ParetoQtf(q, a, b))
>>> print ("dist_pareto(a, b).qtf(q): ", dist_pareto(a, b).qtf(q))
6.356352346256452561561561456135 6E+00
```

class `ctx.dist_pareto`(k, a)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

The Pareto distribution is a continuous probability distribution with minimum (real) value $k > 0$, shape $a > 0$, and the support interval $(k, +\infty)$. See also Wikipedia [1162], MathWorld [830], BoostMath [68], Witkovský [1469].

dist_pareto.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following an Pareto distribution:

$$\text{pdf}_X(x) = \frac{a}{x}\left(\frac{k}{x}\right)^a.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", pareto(mu, sigma).pdf(x))
6.356352346256452561561561561456 1356E-20
```

dist_pareto.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following an Pareto distribution:

$$\text{cdf}_X(x) = 1 - \left(\frac{k}{x}\right)^a = -\text{powm1}(k/x, a).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", pareto(mu, sigma).pdf(x))
6.356352346256452561561561561456 1356E-20
```

dist_pareto.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function (sf) of a random variable X, following an Pareto distribution:

$$\text{sf}_X(x) = \left(\frac{k}{x}\right)^a = \text{pow}(k/x, a).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", pareto(mu, sigma).pdf(x))
sf: 6.356352346256452561561561561456 1356E-20
```

dist_pareto.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following an Pareto distribution:

$$\text{qtf}_X(q) = \frac{k}{(1-q)^{1/a}}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", pareto(mu, sigma).qtf(q))
qtf: 6.356352346256452561561561561456 1356E+00
```

dist_pareto.**isf**(*q*)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following an Pareto distribution:

$$\text{isf}_X(q) = \frac{k}{q^{1/a}}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", pareto(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_pareto.**c_x**(*t*)

Returns $C_X(t)$, the characteristic function of a random variable X, following an Pareto distribution:

$$C_X(t) = a(-ikt)^a \Gamma(-a, -ikt).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", pareto(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_pareto.**m_x**(*t*)

Returns $M_X(t)$, the moment generating function of a random variable X, following an Pareto distribution:

$$M_X(t) = a(-kt)^a \Gamma(-a, -kt), \quad \text{for } t < 0.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("m_x: ", pareto(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_pareto.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following an Pareto distribution:

$$K_X(t) = K_X(t) = \log(M_X(t)), \quad \text{for } t < 0.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", pareto(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

dist_pareto.**moments**(*k*)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following an Pareto distribution. The rth moments only exists for $n_2 > 2r$.

$$\mu'_X(r) = \frac{ak}{a-n} \quad \text{for } a > n.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", pareto(mu, sigma).moments(k))
6.356352346256452561561561456l356E+00
```

dist_pareto.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following an Pareto distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", pareto(mu, sigma).cumulants(k))
6.356352346256452561561561456l356E+00
```

4.5.10 Boost: Rayleigh distribution

The following functions return the pdf, cdf, qtf or boost class of the Rayleigh distribution with scale $b > 0$ and the support interval $(0, +\infty)$.

See also Wikipedia [1185], MathWorld [832], BoostMath [85], Ehrhardt [295] (3.9.27).

`math53.`**`rayleigh_pdf`**(b, x)

Returns pdf(x), the value of the probability density function (*Pdf*) of the Rayleigh distribution:

$$\text{pdf}(x) = \frac{x}{b^2} \exp\left(-\frac{x^2}{2b^2}\right).$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("RayleighPdf(x, a, b): ", RayleighPdf(x, a, b))
>>> print ("dist_rayleigh(a, b).pdf(x): ", dist_rayleigh(a, b).pdf(x))
6.35635234625645256156156145613 56E+00
```

`math53.`**`rayleigh_cdf`**(b, x)

Returns cdf(x), the value of the cumulative distribution function (*Cdf*) of the Rayleigh distribution:

$$\text{cdf}(x) = 1 - \exp\left(-\frac{x^2}{2b^2}\right) = -\text{expm1}\left(-\frac{x^2}{2b^2}\right).$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("RayleighCdf(x, a, b): ", RayleighCdf(x, a, b))
>>> print ("dist_rayleigh(a, b).cdf(x): ", dist_rayleigh(a, b).cdf(x))
6.35635234625645256156156145613 56E+00
```

`math53.`**`rayleigh_qtf`**(b, q)

Returns qtf(q), the value of the quantile function (*Qtf*) of the Rayleigh distribution:

$$\text{qtf}(q) = b\sqrt{-2 \cdot \text{log1p}(-q)}.$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("RayleighQtf(q, a, b): ", RayleighQtf(q, a, b))
>>> print ("dist_rayleigh(a, b).qtf(q): ", dist_rayleigh(a, b).qtf(q))
6.35635234625645256156156145613 56E+00
```

`class` `ctx.`**`dist_rayleigh`**(b)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

The Rayleigh distribution is a continuous probability distribution with scale $b > 0$ and the support interval $(0, +\infty)$. See also Wikipedia [1185], MathWorld [832], BoostMath [85], Witkovský [1470].

dist_rayleigh.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following an Rayleigh distribution:

$$\mathrm{pdf}_X(x) = \frac{x}{b^2} \exp\left(-\frac{x^2}{2b^2}\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", rayleigh(mu, sigma).pdf(x))
6.356352346256452561561561561456 1356E-20
```

dist_rayleigh.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following an Rayleigh distribution:

$$\mathrm{cdf}_X(x) = 1 - \exp\left(-\frac{x^2}{2b^2}\right) = -\mathrm{expm1}\left(-\frac{x^2}{2b^2}\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", rayleigh(mu, sigma).pdf(x))
6.356352346256452561561561561456 1356E-20
```

dist_rayleigh.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following an Rayleigh distribution:

$$\mathrm{sf}_X(x) = \exp\left(-\frac{x^2}{2b^2}\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", rayleigh(mu, sigma).pdf(x))
sf: 6.356352346256452561561561561456 1356E-20
```

dist_rayleigh.**qtf**(q)

Returns $\mathrm{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following an Rayleigh distribution:

$$\mathrm{qtf}_X(q) = b\sqrt{-2 \cdot \mathrm{log1p}(-q)}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", rayleigh(mu, sigma).qtf(q))
qtf: 6.356352346256452561561561561456 1356E+00
```

dist_rayleigh.**isf**(*q*)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following an Rayleigh distribution:

$$\text{isf}_X(q) = b\sqrt{-2 \cdot \log(q)}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", rayleigh(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_rayleigh.**c_x**(*t*)

Returns $C_X(t)$, the characteristic function of a random variable X, following an Rayleigh distribution:

$$C_X(t) = 1 + bte^{b^2t^2/2}\sqrt{\frac{\pi}{2}}\left(\text{erfi}\left(\frac{bt}{\sqrt{2}}\right) - i\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", rayleigh(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_rayleigh.**m_x**(*t*)

Returns $M_X(t)$, the moment generating function of a random variable X, following an Rayleigh distribution:

$$M_X(t) = 1 + bte^{b^2t^2/2}\sqrt{\frac{\pi}{2}}\left(\text{erf}\left(\frac{bt}{\sqrt{2}}\right) + 1\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("m_x: ", rayleigh(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_rayleigh.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following an Rayleigh distribution:

$$K_X(t) = K_X(t) = \log(M_X(t)).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", rayleigh(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

dist_rayleigh.**moments**(*k*)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following an Rayleigh distribution.

$$\mu'_X(j) = b^j 2^{j/2}\Gamma(1 + j/2).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", rayleigh(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_rayleigh.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following an Rayleigh distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", rayleigh(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

4.5.11 Boost: Triangular Distribution

The following functions return the pdf, cdf, qtf or boost class of the triangular distribution, with finite $a < b$, mode c, $a \le c \le b$, and the support interval $[a, b]$.

See also Wikipedia [1187], MathWorld [833], BoostMath [88], Ehrhardt [295] (3.9.30).

`math53.`**`triangular_pdf`**(*lower*, *mode*, *upper*, *x*)

Returns pdf(x), the value of the probability density function (*Pdf*) of the triangular distribution:

$$\text{pdf}(x) = \begin{cases} 0 & x < a \\ \frac{2(x-a)}{(b-a)(c-a)} & a \le x < c \\ \frac{2}{b-a} & x = c \\ \frac{2(b-x)}{(b-a)(b-c)} & c < x \le b \\ 0 & x > b \end{cases}$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("TriangularPdf(x, a, b): ", TriangularPdf(x, a, b))
>>> print ("dist_triangular(a, b).pdf(x): ", dist_triangular(a, b).pdf(x))
6.35635234625645256156156145613 56E+00
```

`math53.`**`triangular_cdf`**(*lower*, *mode*, *upper*, *x*)

Returns cdf(x), the value of the cumulative distribution function (*Cdf*) of the triangular distribution:

$$\text{cdf}(x) = \begin{cases} 0 & x < a \\ \frac{(x-a)^2}{(b-a)(c-a)} & a \le x < c \\ \frac{c-a}{b-a} & x = c \\ 1 - \frac{(b-x)^2}{(b-a)(b-c)} & c < x \le b \\ 1 & x > b \end{cases}$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("TriangularCdf(x, a, b): ", TriangularCdf(x, a, b))
>>> print ("dist_triangular(a, b).cdf(x): ", dist_triangular(a, b).cdf(x))
6.35635234625645256156156145613 56E+00
```

`math53.`**`triangular_qtf`**(*lower*, *mode*, *upper*, *q*)

Returns qtf(q), the value of the quantile function (*Qtf*) of the triangular distribution:

$$\text{qtf}(q) = \begin{cases} a + \sqrt{(b-a)(c-a)y} & y < (c-a)/(b-a) \\ c & y = (c-a)/(b-a) \\ b - \sqrt{(b-a)(b-c)(1-y)} & y > (c-a)/(b-a) \end{cases},$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("TriangularQtf(q, a, b): ", TriangularQtf(q, a, b))
>>> print ("dist_triangular(a, b).qtf(q): ", dist_triangular(a, b).qtf(q))
6.35635234625645256156156145613 56E+00
```

class ctx.**dist_triangular**(*lower*, *mode*, *upper*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The triangular distribution is a continuous probability distribution with finite $a < b$, mode c, $a \leq c \leq b$, and the support interval $[a, b]$. See also Wikipedia [1187], MathWorld [833], BoostMath [88], Witkovský [1473].

dist_triangular.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a triangular distribution:

$$\mathrm{pdf}_X(x) = \begin{cases} 0 & x < a \\ \frac{2(x-a)}{(b-a)(c-a)} & a \leq x < c \\ \frac{2}{b-a} & x = c \\ \frac{2(b-x)}{(b-a)(b-c)} & c < x \leq b \\ 0 & x > b \end{cases}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", triangular(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_triangular.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a triangular distribution:

$$\mathrm{cdf}_X(x) = \begin{cases} 0 & x < a \\ \frac{(x-a)^2}{(b-a)(c-a)} & a \leq x < c \\ \frac{c-a}{b-a} & x = c \\ 1 - \frac{(b-x)^2}{(b-a)(b-c)} & c < x \leq b \\ 1 & x > b \end{cases}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", triangular(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_triangular.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following a triangular distribution:

$$\mathrm{sf}_X(x) = 1 - \mathrm{cdf}_X(x) = \int_x^\infty \mathrm{pdf}_X(x)\mathrm{d}t.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", triangular(mu, sigma).pdf(x))
sf: 6.356352346256452561561561561456 1356E-20
```

dist_triangular.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following a triangular distribution:

$$\text{qtf}_X(q) = \begin{cases} a + \sqrt{(b-a)(c-a)y} & y < (c-a)/(b-a) \\ c & y = (c-a)/(b-a) \\ b - \sqrt{(b-a)(b-c)(1-y)} & y > (c-a)/(b-a) \end{cases},$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", triangular(mu, sigma).qtf(q))
qtf: 6.356352346256452561561561561456 1356E+00
```

dist_triangular.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following a triangular distribution:

$$\text{isf}_X(q) = \text{qtf}_X(1-q) = \text{cdf}_X^{-1}(1-q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", triangular(mu, sigma).isf(q))
6.356352346256452561561561561456 1356E+00
```

dist_triangular.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following a triangular distribution:

$$C_X(t) = 2\frac{(b-c)e^{iat} - (b-a)e^{ict} + (c-a)e^{ibt}}{(b-a)(c-a)(b-c)t^2}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", triangular(mu, sigma).c_x(t))
6.356352346256452561561561561456 1356E+00
```

dist_triangular.**m_x**(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following a triangular distribution:

$$M_X(t) = 2\frac{(b-c)e^{at} - (b-a)e^{ct} + (c-a)e^{bt}}{(b-a)(c-a)(b-c)t^2}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", triangular(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_triangular.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating functionof a random variable X, following a triangular distribution:

$$K_X(t) = \log\left[2\frac{(b-c)e^{at} - (b-a)e^{ct} + (c-a)e^{bt}}{(b-a)(c-a)(b-c)t^2}\right].$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", triangular(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

dist_triangular.**moments**(*k*)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following a triangular distribution:

$$\mu'_{n+1} = \sum_{i=0}^{k} \binom{k}{i} (b-a)^i a^{k-1} \frac{2(1-\theta^{i+1})}{(i+1)(i+2)(1-\theta)}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", triangular(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_triangular.**cumulants**(*k*)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following a triangular distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", triangular(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

References:

Kotz Triangular (moments.)

4.5.12 Boost: Uniform distribution

Returns the pdf, cdf, qtf or boost class of a random variable X, following a uniform distribution on the support interval $[a, b]$ with finite $a < b$.

See also Wikipedia [1188], MathWorld [834], BoostMath [89], Team [534], Ehrhardt [295] (3.9.31).

`math53.`**`uniform_pdf`**(a, b, x)

Returns pdf(x), the value of the probability density function (*Pdf*) of the uniform distribution:

$$\text{pdf}(x) = \frac{1}{b-a}.$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("UniformPdf(x, a, b): ", UniformPdf(x, a, b))
>>> print ("dist_uniform(a, b).pdf(x): ", dist_uniform(a, b).pdf(x))
6.35635234625645256156156145613 56E+00
```

`math53.`**`uniform_cdf`**(a, b, x)

Returns cdf(x), the value of the cumulative distribution function (*Cdf*) of the uniform distribution:

$$\text{cdf}(x) = \frac{x-a}{b-a}.$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("UniformCdf(x, a, b): ", UniformCdf(x, a, b))
>>> print ("dist_uniform(a, b).cdf(x): ", dist_uniform(a, b).cdf(x))
6.35635234625645256156156145613 56E+00
```

`math53.`**`uniform_qtf`**(a, b, q)

Returns qtf(q), the value of the quantile function (*Qtf*) of the uniform distribution:

$$\text{qtf}(q) = a + q(b-a).$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("UniformQtf(q, a, b): ", UniformQtf(q, a, b))
>>> print ("dist_uniform(a, b).qtf(q): ", dist_uniform(a, b).qtf(q))
6.35635234625645256156156145613 56E+00
```

`class` `ctx.`**`dist_uniform`**$(lower, upper)$

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

The uniform distribution is a continuous probability distribution on the support interval $[a, b]$ with finite $a < b$. See also Wikipedia [1188], MathWorld [834], BoostMath [89], Witkovský [1471], R (Statistical System) [534].

dist_uniform.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a uniform distribution:

$$\text{pdf}_X(x) = \frac{1}{b-a}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", uniform(mu, sigma).pdf(x))
6.356352346256452561561561456135 6E-20
```

dist_uniform.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a uniform distribution:

$$\text{cdf}_X(x) = \frac{1}{b-a}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", uniform(mu, sigma).pdf(x))
6.356352346256452561561561456135 6E-20
```

dist_uniform.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function (sf) of a random variable X, following a uniform distribution:

$$\text{sf}_X(x) = 1 - \text{cdf}_X(x) = \int_x^{\infty} \text{pdf}_X(x)\text{d}t.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", uniform(mu, sigma).pdf(x))
sf: 6.356352346256452561561561456135 6E-20
```

dist_uniform.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following a uniform distribution:

$$\text{qtf}_X(q) = \frac{x-a}{b-a}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", uniform(mu, sigma).qtf(q))
qtf: 6.356352346256452561561561456135 6E+00
```

dist_uniform.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following a uniform distribution:

$$\text{isf}_X(q) = \text{qtf}_X(1-q) = \text{cdf}_X^{-1}(1-q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", uniform(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_uniform.**c_x**(*t*)

Returns $C_X(t)$, the characteristic function of a random variable X, following a uniform distribution:

$$C_X(t) = \frac{e^{itb} - e^{ita}}{it(b-a)}, \quad \text{for } t \neq 0, 0 \text{ otherwise.}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", uniform(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_uniform.**m_x**(*t*)

Returns $M_X(t)$, the moment generating function of a random variable X, following a uniform distribution:

$$M_X(t) = \frac{e^{tb} - e^{ta}}{t(b-a)}, \quad \text{for } t \neq 0, 1 \text{ otherwise.}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("m_x: ", uniform(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_uniform.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following a uniform distribution:

$$K_X(t) = K_X(t) = \log(M_X(t)).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", uniform(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

dist_uniform.**moments**(k)

Returns the first j raw moments, $\mu_j, j = 1 \dots k$, of a random variable X, following a uniform distribution.

$$\mu'_X(n) = \frac{1}{n+1} \sum_{k=0}^{n} a^k b^{n-k}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", uniform(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_uniform.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \dots k$, of a random variable X, following a uniform distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", uniform(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

4.5.13 Boost: Weibull (Minimum-Type-III) distribution

The following functions return the pdf, cdf, qtf or boost class of the Weibull distribution with shape $a > 0$, scale $b > 0$, and the support interval $(0, +\infty)$.

See also Wikipedia [1189], MathWorld [835], BoostMath [90], Ehrhardt [295] (3.9.33).

math53.**weibull_pdf**(a, b, x)

Returns pdf(x), the value of the probability density function (*Pdf*) of the Weibull distribution:

$$\text{pdf}(x) = \frac{a}{x}\left(-\frac{x}{b}\right)^a \exp(-(x/b)^a).$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("WeibullPdf(x, a, b): ", WeibullPdf(x, a, b))
>>> print ("dist_weibull(a, b).pdf(x): ", dist_weibull(a, b).pdf(x))
6.356352346256452561561561561456 1356E+00
```

math53.**weibull_cdf**(a, b, x)

Returns cdf(x), the value of the cumulative distribution function (*Cdf*) of the Weibull distribution:

$$\text{cdf}(x) = 1 - \exp\left(-(x/b)^a\right) = -\text{expm1}\left(-(x/b)^a\right).$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("WeibullCdf(x, a, b): ", WeibullCdf(x, a, b))
>>> print ("dist_weibull(a, b).cdf(x): ", dist_weibull(a, b).cdf(x))
6.356352346256452561561561561456 1356E+00
```

math53.**weibull_qtf**(a, b, q)

Returns qtf(q), the value of the quantile function (*Qtf*) of the Weibull distribution:

$$\text{qtf}(q) = b \cdot (-\text{log1p}(-q))^{1/a}.$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("WeibullQtf(q, a, b): ", WeibullQtf(q, a, b))
>>> print ("dist_weibull(a, b).qtf(q): ", dist_weibull(a, b).qtf(q))
6.356352346256452561561561561456 1356E+00
```

class ctx.**dist_weibull**(a, b)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

The Weibull distribution is a continuous probability distribution with shape $a > 0$, scale $b > 0$, and the support interval $(0, +\infty)$. See also Wikipedia [1189], MathWorld [835], BoostMath [90], Witkovský [1474], R (Statistical System) [535].

`dist_weibull.pdf(`x`)`

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a Weibull distribution:

$$\text{pdf}_X(x) = \frac{a}{x}\left(-\frac{x}{b}\right)^a \exp(-(x/b)^a).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", weibull(mu, sigma).pdf(x))
6.356352346256452561561561456135 6E-20
```

`dist_weibull.cdf(`x`)`

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a Weibull distribution:

$$\text{cdf}_X(x) = 1 - \exp\left(-(x/b)^a\right) = -\text{expm1}\left(-(x/b)^a\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", weibull(mu, sigma).pdf(x))
6.356352346256452561561561456135 6E-20
```

`dist_weibull.sf(`x`)`

Returns $\text{sf}_X(x)$, the survival function (sf) of a random variable X, following a Weibull distribution:

$$\text{sf}_X(x) = \exp\left(-(x/b)^a\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", weibull(mu, sigma).pdf(x))
sf: 6.356352346256452561561561456135 6E-20
```

`dist_weibull.qtf(`q`)`

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following a Weibull distribution:

$$\text{qtf}_X(q) = b \cdot \left(-\text{log1p}(-q)\right)^{1/a}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", weibull(mu, sigma).qtf(q))
qtf: 6.356352346256452561561561456135 6E+00
```

`dist_weibull.isf(`q`)`

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following a Weibull distribution:

$$\text{isf}_X(q) = b \cdot \left(-\log(q)\right)^{1/a}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", weibull(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_weibull.**c_x**(*t*)

Returns $C_X(t)$, the characteristic function of a random variable X, following a Weibull distribution:

$$C_X(t) = \sum_{n=0}^{\infty} \frac{(it)^n \lambda^n}{n!} \Gamma(1 + n/k).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", weibull(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_weibull.**m_x**(*t*)

Returns $M_X(t)$, the moment generating function of a random variable X, following a Weibull distribution:

$$M_X(t) = \sum_{n=0}^{\infty} \frac{t^n \lambda^n}{n!} \Gamma(1 + n/k), k \geq 1.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("m_x: ", weibull(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_weibull.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following a Weibull distribution:

$$K_X(t) = K_X(t) = \log(M_X(t)).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", weibull(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

dist_weibull.**moments**(*k*)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following a Weibull distribution.

$$\mu'_X(r) = \sum_{j=0}^{r} \binom{r}{j} \Gamma\left(\frac{r-j}{k} + 1\right) \lambda^{r-j}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", weibull(mu, sigma).moments(k))
6.356352346256452561561561456l356E+00
```

dist_weibull.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following a Weibull distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", weibull(mu, sigma).cumulants(k))
6.356352346256452561561561456l356E+00
```

4.5.14 Dagum (Burr Type III) distribution

class ctx.**dist_dagum**(*n1*, *n2*, *lambda*, ***kwargs*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

These functions return PDF, CDF, and ICDF of the Dagum distribution with location $a > 0$, scale $b > 0$, and the support interval $(0, +\infty)$.

See also: Wikipedia [1193], Kleiber and Kotz [391], Dagum [194].

dist_dagum.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following an Dagum distribution:

$$\mathrm{pdf}_X(x) = f(x; a, b, p) = \frac{ap}{x} \frac{(x/b)^{ap}}{((x/b)^a + 1)^{p+1}}.$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", dist_dagum(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_dagum.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following an Dagum distribution:

$$\mathrm{cdf}_X(x) = \left[1 + \left(\frac{x}{b}\right)^{-a}\right]^{-p} \quad \text{for } x > 0, \text{ where } a, b, p > 0$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", dist_dagum(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_dagum.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function function (sf) of a random variable X, following an Dagum distribution:

$$\mathrm{sf}_X(x) = 1 - \left[1 + \left(\frac{x}{b}\right)^{-a}\right]^{-p}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", dist_dagum(mu, sigma).pdf(x))
sf: 6.3563523462564525615615615614561356E-20
```

dist_dagum.**qtf**(q)

Returns $\mathrm{qtf}_X(x)$, the quantile function function (qtf) of a random variable X, following an Dagum distribution:

$$\mathrm{qtf}_X(q) = b(q^{-1/p} - 1)^{-1/a}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", dist_dagum(mu, sigma).qtf(q))
qtf: 6.356352346256452561561561561456 1356E+00
```

dist_dagum.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function function (isf) of a random variable X, following an Dagum distribution:

$$\text{isf}_X(q) = b((1-q)^{-1/p} - 1)^{-1/a}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", dist_dagum(mu, sigma).isf(q))
6.356352346256452561561561456 1356E+00
```

dist_dagum.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following an Dagum distribution:

$$C_X(t) = \int_0^\infty e^{itx} \text{pdf}_X(x) \text{d}x$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", dist_dagum(mu, sigma).c_x(t))
6.356352346256452561561561456 1356E+00
```

dist_dagum.**m_x**(t)

Returns None, since the moment generating function does not exist.

dist_dagum.**k_x**(t, *k=0*)

Returns None, since the cumulant generating function does not exist.

dist_dagum.**moments**(k)

Returns the first j central moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following an Dagum distribution (see Kleiber_2007_Dagum_moments). The kth moment exists for $-ap < k < a$ and equals

$$\mu_k = \frac{b^k \Gamma(p + k/a)\Gamma(1 - k/a)}{\Gamma(p)}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", dist_dagum(mu, sigma).moments(k))
6.356352346256452561561561456 1356E+00
```

dist_dagum.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following an Dagum distribution. The cumulants are calculated from the moments.

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", dist_dagum(mu, sigma).cumulants(k))
6.356352346256452561561561561456 1356E+00
```

4.5.15 Fisk (log-logistic) distribution

class ctx.**dist_fisk**(*n1*, *n2*, *lambda*, ***kwargs*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The Fisk distribution is a continuous probability distribution with scale parameter $a > 0$, shape parameter $b > 0$, and the support interval $[0, +\infty)$.

See also: Wikipedia [1209], Kleiber and Kotz [391].

dist_fisk.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following an Fisk distribution:

$$\mathrm{pdf}_X(x) = f(x;\alpha,\beta) = \frac{(\beta/\alpha)(x/\alpha)^{\beta-1}}{\left(1+(x/\alpha)^{\beta}\right)^2}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", dist_fisk(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_fisk.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following an Fisk distribution:

$$\mathrm{cdf}_X(x) = \frac{1}{1+(x/\alpha)^{-\beta}} = \frac{x^{\beta}}{\alpha^{\beta}+x^{\beta}}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", dist_fisk(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_fisk.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function function (sf) of a random variable X, following an Fisk distribution:

$$\mathrm{sf}_X(x) = 1 - \frac{1}{1+(x/\alpha)^{-\beta}} = 1 - \frac{x^{\beta}}{\alpha^{\beta}+x^{\beta}}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", dist_fisk(mu, sigma).pdf(x))
sf: 6.3563523462564525615615615614561356E-20
```

dist_fisk.**qtf**(q)

Returns $\mathrm{qtf}_X(x)$, the quantile function function (qtf) of a random variable X, following an Fisk distribution:

$$\mathrm{qtf}_X(q) = \alpha\left(\frac{p}{1-p}\right)^{1/\beta}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", dist_fisk(mu, sigma).qtf(q))
qtf: 6.356352346256452561561561561456 1356E+00
```

dist_fisk.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function function (isf) of a random variable X, following an Fisk distribution:

$$\text{isf}_X(q) = \alpha \left(\frac{q}{1-q} \right)^{1/\beta}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", dist_fisk(mu, sigma).isf(q))
6.356352346256452561561561456 1356E+00
```

dist_fisk.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following an Fisk distribution:

$$C_X(t) = \int_0^\infty e^{itx} \text{pdf}_X(x) \mathrm{d}x$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", dist_fisk(mu, sigma).c_x(t))
6.356352346256452561561561456 1356E+00
```

dist_fisk.**m_x**(t)

Returns None, since the moment generating function does not exist.

dist_fisk.**k_x**(t, *k=0*)

Returns None, since the cumulant generating function does not exist.

dist_fisk.**moments**(k)

Returns the first j central moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following an Fisk distribution (see Kleiber_2007_Dagum_moments). The kth raw moment exists only when $k < \beta$, when it is given by

$$\mu_k = \alpha^k \frac{k\pi/\beta}{\sin(k\pi/\beta)}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", dist_fisk(mu, sigma).moments(k))
6.356352346256452561561561456 1356E+00
```

dist_fisk.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following an Fisk distribution. The cumulants are calculated from the moments.

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", dist_fisk(mu, sigma).cumulants(k))
6.3563523462564525615615615614561356E+00
```

4.5.16 Fréchet (Maximum/Minimum-Type-II or Inverse Weibull) distribution

class ctx.**dist_frechet**(a, b=*1*)

The Fréchet distribution is a continuous probability distribution with shape parameters a and b, and the support interval $(0, +\infty)$. If $b = 1$ this is the classical Fréchet distribution. For $b \neq 1$ this is also called reciprocal Weibull distribution or the generalized inverse Weibull distribution ([DeGusmao2011`).

See also: Wikipedia [1199], De Gusmao *et al.* [205], Kleiber and Kotz [391],

TODO: remove m and s from these formulas, use formulas from De Gusmao *et al.* [205].

Note: α in Wikipedia corresponds to $-\beta$ in De Gusmao *et al.* [205].

dist_frechet.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following an Fréchet distribution:

$$\mathrm{pdf}_X(x) = \frac{\alpha}{s}\left(\frac{x-m}{s}\right)^{-1-\alpha} e^{-(\frac{x-m}{s})^{-\alpha}}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", dist_frechet(mu, sigma).pdf(x))
6.356352346256452561561561456l356E-20
```

dist_frechet.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following an Fréchet distribution:

$$\mathrm{cdf}_X(x) = e^{-(\frac{x-m}{s})^{-\alpha}}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", dist_frechet(mu, sigma).pdf(x))
6.356352346256452561561561456l356E-20
```

dist_frechet.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function function (sf) of a random variable X, following an Fréchet distribution:

$$\mathrm{sf}_X(x) = 1 - e^{-(\frac{x-m}{s})^{-\alpha}}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", dist_frechet(mu, sigma).pdf(x))
sf: 6.356352346256452561561561456l356E-20
```

dist_frechet.**qtf**(q)

Returns $\mathrm{qtf}_X(x)$, the quantile function function (qtf) of a random variable X, following an Fréchet distribution:

$$\mathrm{qtf}_X(q) = m + s\left(-\log(q)\right)^{-1/a}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", dist_frechet(mu, sigma).qtf(q))
qtf: 6.356352346256452561561561561456 1356E+00
```

dist_frechet.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function function (isf) of a random variable X, following an Fréchet distribution:

$$\text{isf}_X(q) = m + s\,(-\log(1-q))^{-1/a}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", dist_frechet(mu, sigma).isf(q))
6.356352346256452561561561561456 1356E+00
```

dist_frechet.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following an Fréchet distribution:

$$C_X(t) = \int_0^\infty e^{itx}\text{pdf}_X(x)\mathrm{d}x$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", dist_frechet(mu, sigma).c_x(t))
6.356352346256452561561561561456 1356E+00
```

dist_frechet.**m_x**(t)

Returns None, since the moment generating function does not exist.

dist_frechet.**k_x**(t, *k=0*)

Returns None, since the cumulant generating function does not exist.

dist_frechet.**moments**(k)

Returns the first j central moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following an Fréchet distribution. Moments exist only for $a > k$.

$$\mu_k = a^k\Gamma(1 - kb^{-1})$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", dist_frechet(mu, sigma).moments(k))
6.356352346256452561561561561456 1356E+00
```

dist_frechet.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following an Fréchet distribution. The cumulants are calculated from the moments.

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", dist_frechet(mu, sigma).cumulants(k))
6.356352346256452561561561561456 1356E+00
```

4.5.17 Generalized Extreme Value (Maximum) or GEV distribution

class ctx.**dist_gev**(*n1*, *n2*, *lambda*, ***kwargs*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

These functions return PDF, CDF, and ICDF of the GEV distribution with location a, scale $b > 0$, and the support interval $(-\infty, +\infty)$:

See also: Wikipedia [1200], Kleiber and Kotz [391], Kotz and Nadarajah [396], Coles [184].

Extreme value theory studies the statistical behaviour of $M_n = \max\{X_1, \ldots, X_n\}$, or $M_n = \min\{X_1, \ldots, X_n\}$, where $\{X_1, \ldots, X_n\}$ is a sequence of independent random variables having a common distribution function F.

If there exist sequences of constants $\{a_n\}$ and $\{b_n\}$ such that $\lim_{n\to\infty} P\{(M_n - b_n)/a_n \le z\} = G(z)$, where G is a non-degenerate distribution function (this assumption is called the stability postulate), then G belongs to the Gumbel, Fréchet or Weibull family of distributions.

The following table summarizes the forms of limiting distributions for maxima and minima for seven widely used continuous distributions:

Initial Distribution	Limiting distribution for maxima	Limiting distribution for minima
Exponential	Type 1 (Gumbel)	Type 3 (Weibull)
Gamma	Type 1 (Gumbel)	Type 3 (Weibull)
Normal	Type 1 (Gumbel)	Type 1 (Gumbel)
Log-Normal	Type 1 (Gumbel)	Type 1 (Gumbel)
Uniform	Type 3 (Weibull)	Type 3 (Weibull)
Pareto	Type 2 (Fréchet)	Type 3 (Weibull)
Cauchy	Type 2 (Fréchet)	Type 2 (Fréchet)

dist_gev.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following an GEV distribution:

$$\text{pdf}_X(x) = \text{cdf}_X(x) \times \begin{cases} \left(1 - c\dfrac{x-a}{b}\right)^{1/c-1} & \text{for } c \neq 0 \\ \exp\left(-\dfrac{x-a}{b}\right) & \text{for } c = 0 \end{cases}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", dist_gev(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_gev.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following an GEV distribution:

$$\mathrm{cdf}_X(x) = \begin{cases} \exp\left(1 - c\dfrac{x-a}{b}\right)^{1/c} & \text{for } c \neq 0 \\ \exp\left(-\exp\left(-\dfrac{x-a}{b}\right)\right) & \text{for } c = 0 \end{cases}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", dist_gev(mu, sigma).pdf(x))
6.356352346256452561561561561456 1356E-20
```

dist_gev.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function function (sf) of a random variable X, following an GEV distribution:

$$\mathrm{sf}_X(x) = \begin{cases} 1 - \exp\left(1 - c\dfrac{x-a}{b}\right)^{1/c} & \text{for } c \neq 0 \\ 1 - \exp\left(-\exp\left(-\dfrac{x-a}{b}\right)\right) & \text{for } c = 0 \end{cases}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", dist_gev(mu, sigma).pdf(x))
sf: 6.356352346256452561561561561456 1356E-20
```

dist_gev.**qtf**(q)

Returns $\mathrm{qtf}_X(x)$, the quantile function function (qtf) of a random variable X, following an GEV distribution:

$$\mathrm{qtf}_X(x) = \begin{cases} a + \dfrac{b}{c}\left(1 - \log(q)\right)^c) & \text{for } c \neq 0 \\ a - b\log(-\log(q)) & \text{for } c = 0 \end{cases}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", dist_gev(mu, sigma).qtf(q))
qtf: 6.356352346256452561561561561456 1356E+00
```

dist_gev.**isf**(q)

Returns $\mathrm{isf}_X(q)$, the inverse survival function function (isf) of a random variable X, following an GEV distribution:

$$\mathrm{isf}_X(x) = \begin{cases} a + \dfrac{b}{c}\left(1 - \log(1-q)\right)^c) & \text{for } c \neq 0 \\ a - b\log(-\log(1-q)) & \text{for } c = 0 \end{cases}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", dist_gev(mu, sigma).isf(q))
6.356352346256452561561561561456 1356E+00
```

dist_gev.**c_x**(*t*)

Returns $C_X(t)$, the characteristic function of a random variable X, following an GEV distribution:

$$C_X(t) = \int_0^\infty e^{itx} \mathrm{pdf}_X(x) \mathrm{d}x$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", dist_gev(mu, sigma).c_x(t))
6.356352346256452561561561456135 6E+00
```

dist_gev.**m_x**(*t*)

Returns None, since the moment generating function does not exist.

dist_gev.**k_x**(*t*, *k=0*)

Returns None, since the cumulant generating function does not exist.

dist_gev.**moments**(*k*)

Returns the first j central moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following an GEV distribution (see Kleiber_2007_Dagum_moments). The kth moment exists for $-ap < k < a$ and equals

$$\mu_k = ??$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", dist_gev(mu, sigma).moments(k))
6.356352346256452561561561456135 6E+00
```

dist_gev.**cumulants**(*k*)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following an GEV distribution. The cumulants are calculated from the moments.

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", dist_gev(mu, sigma).cumulants(k))
6.356352346256452561561561456135 6E+00
```

4.5.18 Generalized Pareto distribution

class ctx.**dist_genpareto**(*n1*, *n2*, *lambda*, ***kwargs*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

These functions return PDF, CDF, and ICDF of the Generalized Pareto distribution with parameters mu in mathbb R, sigma >0`, and $c \in \mathbb{R}$, where the support of $x \geq \mu$ when $c \geq 0$, and $\mu \leq x \leq \mu - \sigma/c$ when $c < 0$.

See also: Wikipedia [1201], Pires *et al.* [470], Kleiber and Kotz [391],

dist_genpareto.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a Generalized Pareto distribution:

$$\mathrm{pdf}_X(x) = f_c(z) = \begin{cases} (1+cz)^{-\frac{c+1}{c}} & \text{for } c \neq 0, \\ e^{-z} & \text{for } c = 0. \end{cases}, \quad \text{where } z = \frac{x-\mu}{\sigma}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", dist_genpareto(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_genpareto.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a Generalized Pareto distribution:

$$\mathrm{cdf}_X(x) = \begin{cases} 1-(1+cz)^{-1/c} & \text{for } c \neq 0, \\ 1-\exp(-z) & \text{for } c = 0, \end{cases}, \quad \text{where } z = \frac{x-\mu}{\sigma}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", dist_genpareto(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_genpareto.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function function (sf) of a random variable X, following a Generalized Pareto distribution:

$$\mathrm{sf}_X(x) = \begin{cases} (1+cz)^{-1/c} & \text{for } c \neq 0, \\ \exp(-z) & \text{for } c = 0, \end{cases}, \quad \text{where } z = \frac{x-\mu}{\sigma}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", dist_genpareto(mu, sigma).pdf(x))
sf: 6.35635234625645256156156145613 56E-20
```

dist_genpareto.**qtf**(q)

Returns $\mathrm{qtf}_X(x)$, the quantile function function (qtf) of a random variable X, following a Generalized Pareto distribution:

$$\mathrm{qtf}_X(q) = \mu + \sigma \times \begin{cases} \dfrac{(1-q)^{-c}-1}{c} & \text{for } c \neq 0, \\ -\log(1-q) & \text{for } c = 0, \end{cases}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", dist_genpareto(mu, sigma).qtf(q))
qtf: 6.356352346256452561561561561456 1356E+00
```

dist_genpareto.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function function (isf) of a random variable X, following a Generalized Pareto distribution:

$$\text{isf}_X(q) = \mu + \sigma \times \begin{cases} \dfrac{(q)^{-c} - 1}{c} & \text{for } c \neq 0, \\ -\log(q) & \text{for } c = 0, \end{cases}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", dist_genpareto(mu, sigma).isf(q))
6.356352346256452561561561456 1356E+00
```

dist_genpareto.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following a Generalized Pareto distribution:

$$C_X(t) = \int_0^\infty e^{itx} \text{pdf}_X(x) \mathrm{d}x$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", dist_genpareto(mu, sigma).c_x(t))
6.356352346256452561561561456 1356E+00
```

dist_genpareto.**m_x**(t)

Returns None, since the moment generating function does not exist.

dist_genpareto.**k_x**(t, *k=0*)

Returns None, since the cumulant generating function does not exist.

dist_genpareto.**moments**(k)

Returns the first j central moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following a Generalized Pareto distribution (see Kleiber_2007_Dagum_moments). The rth moment exists for $c < 1/r$ and equals

$$\mu_k = \frac{r! \sigma!}{\prod_{i=1}^{r} (1 - ic)}.$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", dist_genpareto(mu, sigma).moments(k))
6.356352346256452561561561456 1356E+00
```

dist_genpareto.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following a Generalized Pareto distribution. The cumulants are calculated from the moments.

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", dist_genpareto(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

4.5.19 Gompertz-Makeham distribution

class ctx.**dist_gompertz**(*a*, *b*, *lambda1=0*, ***kwargs*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

Gompertz-Makeham distribution is a continuous probability distribution with parameters $a > 0, b > 0, \lambda \geq 0$, and the support interval $(0, +\infty)$. The hazard function has the form $\mathrm{hf}_X(x) = ae^{bx} + \lambda$.

See also: Wikipedia [1202], MathWorld [248], Jodrá [383], Riffi [477].

dist_gompertz.**pdf**(*x*)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following an Gompertz-Makeham distribution:

$$\mathrm{pdf}_X(x) = \mathrm{hf}_X(x) \cdot \mathrm{sf}_X(x) = (ae^{bx} + \lambda) \cdot \exp\left[-\lambda x - \frac{a}{b}\left(e^{bx} - 1\right)\right]$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", dist_gompertz(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_gompertz.**cdf**(*x*)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following an Gompertz-Makeham distribution:

$$\mathrm{cdf}_X(x) = 1 - \exp\left[-\lambda x - \frac{a}{b}\left(e^{bx} - 1\right)\right] = -\mathrm{expm1}\left[-\lambda x - \frac{a}{b}\left(\mathrm{expm1}(bx)\right)\right]$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", dist_gompertz(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_gompertz.**sf**(*x*)

Returns $\mathrm{sf}_X(x)$, the survival function function (sf) of a random variable X, following an Gompertz-Makeham distribution:

$$\mathrm{sf}_X(x) = \exp\left[-\lambda x - \frac{a}{b}\left(e^{bx} - 1\right)\right] = \exp\left[-\lambda x - \frac{a}{b}\left(\mathrm{expm1}(bx)\right)\right]$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", dist_gompertz(mu, sigma).pdf(x))
sf: 6.3563523462564525615615615614561356E-20
```

dist_gompertz.**qtf**(*q*)

Returns $\mathrm{qtf}_X(x)$, the quantile function function (qtf) of a random variable X, following an Gompertz-Makeham distribution:

$$\mathrm{qtf}_X(q) = \begin{cases} \dfrac{1}{b}\mathrm{log1p}\left(-\dfrac{b}{a}\,\mathrm{log1p}(-q)\right) & \text{for } \lambda = 0, \\ \dfrac{a}{b\lambda} - \dfrac{1}{\lambda}\mathrm{log1p}(-q) - \dfrac{1}{b}W_0\left(\dfrac{a}{\lambda}e^{a/\lambda} \cdot \mathrm{pow1p}(-q, -b/\lambda)\right) & \text{for } \lambda > 0, \end{cases}$$

where W_0 denotes the principal branch of the Lambert W function (see ...).

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", dist_gompertz(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

`dist_gompertz.isf(q)`

Returns $\text{isf}_X(q)$, the inverse survival function function (isf) of a random variable X, following an Gompertz-Makeham distribution:

$$\text{isf}_X(q) = \begin{cases} \frac{1}{b}\text{log1p}\left(-\frac{b}{a}\log(q)\right) & \text{for } \lambda = 0, \\ \frac{a}{b\lambda} - \frac{1}{\lambda}\log(q) - \frac{1}{b}W_0\left(\frac{a}{\lambda}e^{a/\lambda}\cdot q^{-b/\lambda}\right) & \text{for } \lambda > 0, \end{cases}$$

where W_0 denotes the principal branch of the Lambert W function (see ...).

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", dist_gompertz(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

`dist_gompertz.c_x(t)`

Returns $C_X(t)$, the characteristic function of a random variable X, following an Gompertz-Makeham distribution:

$$C_X(t) = e^d\left(d\cdot E_{p(it)}(d) + \frac{\lambda}{b}E_{1+p(it)}(d)\right), \quad \text{where } p(it) = \frac{\lambda - it}{b} \text{and } d = \frac{a}{b}.$$

Here $E_p(z)$ denotes the exponential integral, defined as $E_p(z) = z^{p-1}\Gamma(1-p,z) = z^{p-1}e^{-z}U(p,p,z)$. $\Gamma(\cdot)$ denotes the incomplete gamma function (see ...), and $U(\cdot)$ denotes Tricomi's hypergeometric function (see ...).

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", dist_gompertz(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

`dist_gompertz.m_x(t)`

Returns $M_X(t)$, the moment generating function of a random variable X, following an Gompertz-Makeham distribution:

$$M_X(t) = e^d\left(d\cdot E_{p(t)}(d) + \frac{\lambda}{b}E_{1+p(t)}(d)\right), \quad \text{where } p(t) = \frac{\lambda - t}{b} \text{and } d = \frac{a}{b}.$$

Here $E_p(z)$ denotes the exponential integral, defined as $E_p(z) = z^{p-1}\Gamma(1-p,z) = z^{p-1}e^{-z}U(p,p,z)$. $\Gamma(\cdot)$ denotes the incomplete gamma function (see ...), and $U(\cdot)$ denotes Tricomi's hypergeometric function (see ...).

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", dist_gompertz(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_gompertz.**k_x**(t, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following an Gompertz-Makeham distribution:

$$K_X(t) = \log(M_X(t))$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", dist_gompertz(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_gompertz.**moments**(k)

Returns the first j central moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following an Gompertz-Makeham distribution. The moments are calculated from their definition:

$$\mu'_X(r) = E(X^r) = \int_0^1 x^r \text{pdf}_X(x) \text{d}x$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", dist_gompertz(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_gompertz.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following an Gompertz-Makeham distribution. The cumulants are calculated from the moments.

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", dist_gompertz(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

4.5.20 Lomax distribution

class ctx.**dist_lomax**(*n1*, *n2*, *lambda*, ***kwargs*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

These functions return PDF, CDF, and ICDF of the Lomax distribution with location a, scale $b > 0$, and the support interval $(-\infty, +\infty)$:

See also: Wikipedia [1210], Kleiber and Kotz [391],

dist_lomax.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following an Lomax distribution:

$$\mathrm{pdf}_X(x) = \frac{a}{b}\left(1 + \frac{x}{b}\right)^{-(a+1)}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", dist_lomax(mu, sigma).pdf(x))
6.356352346256452561561561561456135 6E-20
```

dist_lomax.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following an Lomax distribution:

$$\mathrm{cdf}_X(x) = 1 - \left(1 + \frac{x}{b}\right)^{-a}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", dist_lomax(mu, sigma).pdf(x))
6.356352346256452561561561561456135 6E-20
```

dist_lomax.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function function (sf) of a random variable X, following an Lomax distribution:

$$\mathrm{sf}_X(x) = \left(1 + \frac{x}{b}\right)^{-a}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", dist_lomax(mu, sigma).pdf(x))
sf: 6.356352346256452561561561561456135 6E-20
```

dist_lomax.**qtf**(q)

Returns $\mathrm{qtf}_X(x)$, the quantile function function (qtf) of a random variable X, following an Lomax distribution:

$$\mathrm{qtf}_X(q) = b\left((1-p)^{-\frac{1}{a}} - 1\right)$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", dist_lomax(mu, sigma).qtf(q))
qtf: 6.356352346256452561561561561456 1356E+00
```

dist_lomax.**isf**(*q*)

Returns $\text{isf}_X(q)$, the inverse survival function function (isf) of a random variable X, following an Lomax distribution:

$$\text{isf}_X(q) = b\left((1-q)^{-\frac{1}{a}} - 1\right)$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", dist_lomax(mu, sigma).isf(q))
6.356352346256452561561561561456 1356E+00
```

dist_lomax.**c_x**(*t*)

Returns $C_X(t)$, the characteristic function of a random variable X, following an Lomax distribution:

$$C_X(t) = \int_0^\infty e^{itx}\text{pdf}_X(x)\mathrm{d}x$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", dist_lomax(mu, sigma).c_x(t))
6.356352346256452561561561561456 1356E+00
```

dist_lomax.**m_x**(*t*)

Returns None, since the moment generating function does not exist.

dist_lomax.**k_x**(*t*, *k=0*)

Returns None, since the cumulant generating function does not exist.

dist_lomax.**moments**(*k*)

Returns the first j central moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following an Lomax distribution (see Kleiber_2007_Dagum_moments). The kth moment exists for $-k < a$ and equals

$$\mu_k = \frac{b^k\Gamma(a-k)\Gamma(1+k)}{\Gamma(a)}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", dist_lomax(mu, sigma).moments(k))
6.356352346256452561561561561456 1356E+00
```

dist_lomax.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following an Lomax distribution. The cumulants are calculated from the moments.

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", dist_lomax(mu, sigma).cumulants(k))
6.356352346256452561561561561456l356E+00
```

4.5.21 Shifted Gompertz distribution

class ctx.**dist_shifted_gompertz**(*a*, *b*, *lambda1=0*, ***kwargs*)

Shifted Gompertz distribution is a continuous probability distribution with parameters $a > 0, b > 0$, and the support interval $[0, +\infty)$.

See also: Wikipedia [1212], MathWorld [255], Jiménez and Pedro Jodrá [379], Jiménez Torres [380].

dist_shifted_gompertz.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following an Shifted Gompertz distribution:

$$\mathrm{pdf}_X(x) = be^{-(bx+ae^{-bx})}\left(1 + a\left(1 - e^{-bx}\right)\right), \quad x > 0.$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", dist_shifted_gompertz(mu, sigma).pdf(x))
6.356352346256452561561561561456 1356E-20
```

dist_shifted_gompertz.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following an Shifted Gompertz distribution:

$$\mathrm{cdf}_X(x) = \left(1 - e^{-bx}\right)e^{-ae^{-bx}}, \quad x > 0.$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", dist_shifted_gompertz(mu, sigma).pdf(x))
6.356352346256452561561561561456 1356E-20
```

dist_shifted_gompertz.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function function (sf) of a random variable X, following an Shifted Gompertz distribution:

$$\mathrm{sf}_X(x) = 1 - \left(1 - e^{-bx}\right)e^{-ae^{-bx}}, \quad x > 0.$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", dist_shifted_gompertz(mu, sigma).pdf(x))
sf: 6.356352346256452561561561561456 1356E-20
```

dist_shifted_gompertz.**qtf**(q)

Returns $\mathrm{qtf}_X(x)$, the quantile function function (qtf) of a random variable X, following an Shifted Gompertz distribution:

$$\mathrm{qtf}_X(q) = \frac{1}{b}\log\left(1 - \frac{W_0(ae^a q)}{a}\right)$$

where W_0 denotes the principal branch of the Lambert W function (see ...).

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", dist_shifted_gompertz(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

`dist_shifted_gompertz.isf(q)`

Returns $\text{isf}_X(q)$, the inverse survival function function (isf) of a random variable X, following an Shifted Gompertz distribution:

$$\text{isf}_X(q) = \frac{1}{b} \log\left(1 - \frac{W_0(ae^a(1-q))}{a}\right)$$

where W_0 denotes the principal branch of the Lambert W function (see ...).

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", dist_shifted_gompertz(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

`dist_shifted_gompertz.c_x(t)`

Returns $C_X(t)$, the characteristic function of a random variable X, following an Shifted Gompertz distribution:

$$C_X(t) = a^{it/(b-1)}(a + it/b)\Gamma(1 - it/b, a) + e^{-a}.$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", dist_shifted_gompertz(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

`dist_shifted_gompertz.m_x(t)`

Returns $M_X(t)$, the moment generating function of a random variable X, following an Shifted Gompertz distribution:

$$M_X(t) = a^{t/(b-1)}(a + t/b)\Gamma(1 - t/b, a) + e^{-a}.$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", dist_shifted_gompertz(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

`dist_shifted_gompertz.k_x(t, k=0)`

Returns $K_X(t)$, the cumulant generating function of a random variable X, following an Shifted Gompertz distribution:

$$K_X(t) = \log(M_X(t))$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", dist_shifted_gompertz(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_shifted_gompertz.**moments**(k)

Returns the first j central moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following an Shifted Gompertz distribution. The moments are calculated from their definition:

$$\mu'_X(r) = E(X^r) = \int_0^1 x^r \mathrm{pdf}_X(x) \mathrm{d}x$$

There is an explicit expression for the mean:

$$\mu'_X(1) = E(X) = \frac{1}{b}\left(\gamma + \log(a) + \frac{1 - e^{-a}}{a} + E_1(a)\right).$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", dist_shifted_gompertz(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_shifted_gompertz.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following an Shifted Gompertz distribution. The cumulants are calculated from the moments.

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", dist_shifted_gompertz(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

4.5.22 Singh-Maddala (Burr Type XII) distribution

class ctx.**dist_singh_maddala**(*n1*, *n2*, *lambda*, ***kwargs*)

These functions return PDF, CDF, and ICDF of the Singh-Maddala distribution with location a, scale $b > 0$, and the support interval $(-\infty, +\infty)$:

See also: Wikipedia [1192], Rodriguez [481], Kleiber and Kotz [391] (page 198), Kumar [400],

dist_singh_maddala.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following an Singh-Maddala distribution:

$$\text{pdf}_X(x) = f(x; c, d) = \frac{adx^{a-1}}{b^a(1 + (x/b)^a)^{1+d}}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", dist_singh_maddala(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_singh_maddala.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following an Singh-Maddala distribution:

$$\text{cdf}_X(x) = 1 - (1 + (x/b)^a)^{-d}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", dist_singh_maddala(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_singh_maddala.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function function (sf) of a random variable X, following an Singh-Maddala distribution:

$$\text{sf}_X(x) = (1 + (x/b)^a)^{-d}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", dist_singh_maddala(mu, sigma).pdf(x))
sf: 6.3563523462564525615615615614561356E-20
```

dist_singh_maddala.**qtf**(d)

Returns $\text{qtf}_X(x)$, the quantile function function (qtf) of a random variable X, following an Singh-Maddala distribution:

$$\text{qtf}_X(q) = b[(1 - q)^{-1/d} - 1]^{1/a}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; d = 0.3;
>>> print ("qtf: ", dist_singh_maddala(mu, sigma).qtf(d))
qtf: 6.3563523462564525615615615614561356E+00
```

dist_singh_maddala.**isf**(d)

Returns $\text{isf}_X(d)$, the inverse survival function function (isf) of a random variable X, following an Singh-Maddala distribution:

$$\text{isf}_X(d) = b[(1-q)^{-1/d} - 1]^{1/a}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; d = 0.3;
>>> print ("isf: ", dist_singh_maddala(mu, sigma).isf(d))
6.35635234625645256156156145613 56E+00
```

dist_singh_maddala.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following an Singh-Maddala distribution:

$$C_X(t) = \int_0^\infty e^{itx} \text{pdf}_X(x) \mathrm{d}x$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", dist_singh_maddala(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_singh_maddala.**m_x**(t)

Returns None, since the moment generating function does not exist.

dist_singh_maddala.**k_x**(t, *k=0*)

Returns None, since the cumulant generating function does not exist.

dist_singh_maddala.**moments**(k)

Returns the first j central moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following an Singh-Maddala distribution. The kth moment exists for $-a < k < aq$; it equals (see Kleiber(2003), page 201)

$$\mu_n = \frac{b^k \Gamma(1 + k/a) \Gamma(d - k/a)}{\Gamma(d)}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", dist_singh_maddala(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_singh_maddala.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following an Singh-Maddala distribution. The cumulants are calculated from the moments.

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", dist_singh_maddala(mu, sigma).cumulants(k))
6.3563523462564525615615615614561356E+00
```

4.6 Closed form distributions, based on the error function

4.6.1 !!!Boost: Lévy distribution

The following functions return the pdf, cdf, qtf or boost class of the Lévy distribution with location $a \in \mathbb{R}$, scale $b > 0$ and the support interval $(a, +\infty)$.

See also Wikipedia [1179], Ehrhardt [295] (3.9.16).

`math53.levy_pdf`(a, b, x)

Returns pdf(x), the value of the probability density function (*Pdf*) of the Lévy distribution:

$$\text{pdf}(x) = \sqrt{\frac{b}{2\pi}} \frac{e^{-\frac{b}{2(x-a)}}}{(x-a)^{3/2}}.$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("LevyPdf(x, a, b): ", LevyPdf(x, a, b))
>>> print ("dist_levy(a, b).pdf(x): ", dist_levy(a, b).pdf(x))
6.35635234625645256156156145614561356E+00
```

`math53.levy_cdf`(a, b, x)

Returns cdf(x), the value of the cumulative distribution function (*Cdf*) of the Lévy distribution:

$$\text{cdf}(x) = \text{erfc}\left(\sqrt{\frac{b}{2(x-a)}}\right).$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("LevyCdf(x, a, b): ", LevyCdf(x, a, b))
>>> print ("dist_levy(a, b).cdf(x): ", dist_levy(a, b).cdf(x))
6.35635234625645256156156145614561356E+00
```

`math53.levy_qtf`(a, b, q)

Returns qtf(q), the value of the quantile function (*Qtf*) of the Lévy distribution:

$$\text{qtf}(q) = a + \frac{b}{2(\text{erfc}^{-1}(q))^2}.$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("LevyQtf(q, a, b): ", LevyQtf(q, a, b))
>>> print ("dist_levy(a, b).qtf(q): ", dist_levy(a, b).qtf(q))
6.35635234625645256156156145614561356E+00
```

class `ctx.dist_levy`(a, b)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

The Lévy distribution is a continuous probability distribution with location $a \in \mathbb{R}$, scale $b > 0$ and the support interval $(a, +\infty)$. See also Wikipedia [1179], MathWorld [826].

dist_levy.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a Lévy distribution:

$$\text{pdf}_X(x) = \sqrt{\frac{b}{2\pi}} \frac{e^{-\frac{b}{2(x-a)}}}{(x-a)^{3/2}}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", levy(mu, sigma).pdf(x))
6.356352346256452561561561456135 6E-20
```

dist_levy.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a Lévy distribution:

$$\text{cdf}_X(x) = \text{erfc}\left(\sqrt{\frac{b}{2(x-a)}}\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", levy(mu, sigma).pdf(x))
6.356352346256452561561561456135 6E-20
```

dist_levy.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function function (sf) of a random variable X, following a Lévy distribution:

$$\text{sf}_X(x) = \text{erf}\left(\sqrt{\frac{b}{2(x-a)}}\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", levy(mu, sigma).pdf(x))
sf: 6.356352346256452561561561456135 6E-20
```

dist_levy.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function function (qtf) of a random variable X, following a Lévy distribution:

$$\text{qtf}_X(q) = a + \frac{b}{2(\text{erfc}^{-1}(q))^2}.$$

where $\text{erfc}(\cdot)$ and $\text{erfc}^{-1}(\cdot)$ denote the complementary error function and its functional inverse, respectively.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", levy(mu, sigma).qtf(q))
qtf: 6.356352346256452561561561456135 6E+00
```

dist_levy.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function function (isf) of a random variable X, following a Lévy distribution:

$$\text{isf}_X(q) = a + \frac{b}{2(\text{erf}^{-1}(q))^2}.$$

where $\text{erfc}(\cdot)$ and $\text{erfc}^{-1}(\cdot)$ denote the complementary error function and its functional inverse, respectively.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", levy(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_levy.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following a Lévy distribution:

$$C_X(t) = e^{i\mu t - \sqrt{-2ict}}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", levy(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_levy.**m_x**(t)

Returns `NaN`, since the moment generating function does not exist.

dist_levy.**k_x**(t, *k=0*)

Returns `NaN`, since the cumulant generating function does not exist.

dist_levy.**moments**(k)

Returns `NaN`, since moments do not exist.

dist_levy.**cumulants**(k)

Returns `NaN`, since cumulants do not exist.

4.6.2 Boost: Lognormal (Johnson S_L) distribution

The following functions return the pdf, cdf, qtf or boost class of the lognormal distribution with location $a \in \mathbb{R}$, scale $b > 0$, and the support interval $(0, +\infty)$.

See also Wikipedia [1153], MathWorld [823], BoostMath [61], Ehrhardt [295] (3.9.19).

`math53.lognormal_pdf`(a, b, x)

Returns pdf(x), the value of the probability density function (*Pdf*) of the lognormal distribution:

$$\text{pdf}(x) = \frac{1}{bx\sqrt{2\pi}} \exp\left(-\frac{(\log(x) - a)^2}{2b^2}\right).$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("LognormalPdf(x, a, b): ", LognormalPdf(x, a, b))
>>> print ("dist_lognormal(a, b).pdf(x): ", dist_lognormal(a, b).pdf(x))
6.35635234625645256156156145613 56E+00
```

`math53.lognormal_cdf`(a, b, x)

Returns cdf(x), the value of the cumulative distribution function (*Cdf*) of the lognormal distribution:

$$\text{cdf}(x) = \frac{1}{2}\text{erfc}\left(-\frac{\log(x) - a}{b\sqrt{2}}\right).$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("LognormalCdf(x, a, b): ", LognormalCdf(x, a, b))
>>> print ("dist_lognormal(a, b).cdf(x): ", dist_lognormal(a, b).cdf(x))
6.35635234625645256156156145613 56E+00
```

`math53.lognormal_qtf`(a, b, q)

Returns qtf(q), the value of the quantile function (*Qtf*) of the lognormal distribution:

$$\text{qtf}(q) = \exp\left(a - b\sqrt{2} \cdot \text{erfc}^{-1}(2q)\right).$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("LognormalQtf(q, a, b): ", LognormalQtf(q, a, b))
>>> print ("dist_lognormal(a, b).qtf(q): ", dist_lognormal(a, b).qtf(q))
6.35635234625645256156156145613 56E+00
```

class `ctx.dist_lognormal`(a, b)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

The lognormal distribution is a continuous probability distribution with location $a \in \mathbb{R}$, scale $b > 0$, and the support interval $(0, +\infty)$. See also Wikipedia [1153], MathWorld [823], BoostMath [61], Witkovský [1465], R (Statistical System) [523].

dist_lognormal.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following an lognormal distribution:

$$\text{pdf}_X(x) = \frac{1}{bx\sqrt{2\pi}} \exp\left(-\frac{(\log(x)-a)^2}{2b^2}\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", lognormal(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_lognormal.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following an lognormal distribution:

$$\text{cdf}_X(x) = \frac{1}{2}\text{erfc}\left(-\frac{\log(x)-a}{b\sqrt{2}}\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", lognormal(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_lognormal.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function (sf) of a random variable X, following an lognormal distribution:

$$\text{sf}_X(x) = \frac{1}{2}\text{erfc}\left(\frac{\log(x)-a}{b\sqrt{2}}\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", lognormal(mu, sigma).pdf(x))
sf: 6.3563523462564525615615615614561356E-20
```

dist_lognormal.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following an lognormal distribution:

$$\text{qtf}_X(q) = \exp\left(a - b\sqrt{2}\cdot\text{erfc}^{-1}(2q)\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", lognormal(mu, sigma).qtf(q))
qtf: 6.3563523462564525615615615614561356E+00
```

dist_lognormal.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following an lognormal distribution:

$$\text{isf}_X(q) = \exp\left(a + b\sqrt{2} \cdot \text{erfc}^{-1}(2q)\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", lognormal(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_lognormal.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following an lognormal distribution. The characteristic function is defined for real values of t, but is not defined for any complex value of t that has a negative imaginary part, and hence the characteristic function is not analytic at the origin. Consequently, the characteristic function of the log-normal distribution cannot be represented as an infinite convergent series. A closed-form formula for the characteristic function in the domain of convergence is not known. A relatively simple approximating formula is available in closed form, and is given by

$$C_X(t) = \frac{\exp(-\frac{V^2+2V}{2\sigma^2})}{\sqrt{1+V}}, \quad \text{where } V = W(-it\sigma^2 e^{\mu}).$$

where W is the Lambert W function. This approximation is derived via an asymptotic method, but it stays sharp all over the domain of convergence.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", lognormal(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_lognormal.**m_x**(t)

The moment generating function does not exist.

dist_lognormal.**k_x**(t, *k=0*)

The cumulant generating function does not exist.

dist_lognormal.**moments**(k)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following an lognormal distribution. All moments of the log-normal distribution exist.

$$\mu'_X(r) = \exp(r\mu + r^2\sigma^2/2).$$

However, the log-normal distribution is not determined by its moments. This implies that it cannot have a defined moment generating function in a neighborhood of zero.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", lognormal(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_lognormal.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following an lognormal distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", lognormal(mu, sigma).cumulants(k))
6.356352346256452561561561561456l356E+00
```

4.6.3 !!!Boost: Moyal Distribution

The following functions return the pdf, cdf, qtf or boost class of the Moyal distribution with location $a \in \mathbb{R}$, scale $b > 0$, and the support interval $(-\infty, +\infty)$.

See also MathWorld [253], G. [339], Walck [786], Ehrhardt [295] (3.9.21).

`math53.moyal_pdf(`a, b, x`)`

Returns pdf(x), the value of the probability density function (*Pdf*) of the Moyal distribution:

$$\text{pdf}(x) = \frac{1}{\sqrt{2\pi}b} \exp\left(-\frac{x-a}{2b} - \frac{1}{2}e^{-\frac{x-a}{b}}\right).$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("MoyalPdf(x, a, b): ", MoyalPdf(x, a, b))
>>> print ("dist_moyal(a, b).pdf(x): ", dist_moyal(a, b).pdf(x))
6.356352346256452561561561561456135 6E+00
```

`math53.moyal_cdf(`a, b, x`)`

Returns cdf(x), the value of the cumulative distribution function (*Cdf*) of the Moyal distribution:

$$\text{cdf}(x) = 1 - P\left(\frac{1}{2}, \frac{e^{-x}}{2}\right) = \text{erfc}\left(\frac{e^{-\frac{x-a}{2b}}}{\sqrt{2}}\right).$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("MoyalCdf(x, a, b): ", MoyalCdf(x, a, b))
>>> print ("dist_moyal(a, b).cdf(x): ", dist_moyal(a, b).cdf(x))
6.356352346256452561561561561456135 6E+00
```

`math53.moyal_qtf(`a, b, q`)`

Returns qtf(q), the value of the quantile function (*Qtf*) of the Moyal distribution:

$$\text{qtf}(q) = a - b\log\left(2(\text{erfc}^{-1}(q))^2\right)$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("MoyalQtf(q, a, b): ", MoyalQtf(q, a, b))
>>> print ("dist_moyal(a, b).qtf(q): ", dist_moyal(a, b).qtf(q))
6.356352346256452561561561561456135 6E+00
```

class `ctx.dist_moyal(`a, b`)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

The Moyal distribution is a continuous probability distribution with location $a \in \mathbb{R}$, scale $b > 0$, and the support interval $(-\infty, +\infty)$. See also MathWorld [253], G. [339], Walck [786].

Other References: Amath: inversion, Walck: moments and char func.

dist_moyal.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following an Moyal distribution:

$$\text{pdf}_X(x) = \frac{1}{\sqrt{2\pi}b} \exp\left(-\frac{x-a}{2b} - \frac{1}{2}e^{-\frac{x-a}{b}}\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", moyal(mu, sigma).pdf(x))
6.356352346256452561561561561456135 6E-20
```

dist_moyal.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following an Moyal distribution:

$$\text{cdf}_X(x) = 1 - P\left(\frac{1}{2}, \frac{e^{-x}}{2}\right) = \text{erfc}\left(\frac{e^{-\frac{x-a}{2b}}}{\sqrt{2}}\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", moyal(mu, sigma).pdf(x))
6.356352346256452561561561561456135 6E-20
```

dist_moyal.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function function (sf) of a random variable X, following an Moyal distribution:

$$\text{sf}_X(x) = P\left(\frac{1}{2}, \frac{e^{-x}}{2}\right) = \text{erf}\left(\frac{e^{-\frac{x-a}{2b}}}{\sqrt{2}}\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", moyal(mu, sigma).pdf(x))
sf: 6.356352346256452561561561561456135 6E-20
```

dist_moyal.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function function (qtf) of a random variable X, following an Moyal distribution:

$$\text{qtf}_X(q) = a - b\log\left(2(\text{erfc}^{-1}(q))^2\right)$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", moyal(mu, sigma).qtf(q))
qtf: 6.356352346256452561561561561456135 6E+00
```

dist_moyal.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function function (isf) of a random variable X, following an Moyal distribution:

$$\text{isf}_X(q) = a - b \log\left(2(\text{erf}^{-1}(q))^2\right)$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", moyal(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_moyal.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following an Moyal distribution:

$$C_X(t) = \frac{2^{it}}{\sqrt{\pi}}\Gamma\left(\tfrac{1}{2} - it\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", moyal(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_moyal.**m_x**(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following an Moyal distribution:

$$M_X(t) = \frac{2^{t}}{\sqrt{\pi}}\Gamma\left(\tfrac{1}{2} - t\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("m_x: ", moyal(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_moyal.**k_x**(t, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following an Moyal distribution:

$$K_X(t) = \log\left[\frac{2^{t}}{\sqrt{\pi}}\Gamma\left(\tfrac{1}{2} - t\right)\right].$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", moyal(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

dist_moyal.**moments**(k)

Returns the first j central moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following an Moyal distribution. The moments are calculated from the cumulants.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", moyal(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_moyal.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following an Moyal distribution. The cumulants are calculated from the moments.

$$\kappa_X(1) = \log(2) + \gamma, \qquad \kappa_X(n) = (n-1)!(2^n - 1)\zeta(n), \quad n \geq 2.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", moyal(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

4.6.4 Boost: Normal (Johnson S_N) distribution

The following functions return the pdf, cdf, qtf or boost class of the normal distribution with mean $\mu \in \mathbb{R}$, standard deviation $\sigma > 0$, and the support interval $(-\infty, +\infty)$.

See also Wikipedia [1161], MathWorld [829], BoostMath [67], Ehrhardt [295] (3.9.24).

`math53.`**`normal_pdf`**(*mu=0*, *sigma=1*, *x*)

Returns pdf(x), the value of the probability density function (*Pdf*) of the normal distribution:

$$\text{pdf}(x) = \phi(x) = \frac{1}{\sqrt{2\pi\sigma^2}} e^{-\frac{(x-\mu)^2}{2\sigma^2}}.$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("NormalPdf(x, a, b): ", NormalPdf(x, a, b))
>>> print ("dist_normal(a, b).pdf(x): ", dist_normal(a, b).pdf(x))
6.35635234625645256156156145614561356E+00
```

`math53.`**`normal_cdf`**(*mu=0*, *sigma=1*, *x*)

Returns cdf(x), the value of the cumulative distribution function (*Cdf*) of the normal distribution:

$$\text{cdf}(x) = \Phi(x) = \frac{1}{2}\text{erfc}\left(-\frac{x-\mu}{\sigma\sqrt{2}}\right).$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("NormalCdf(x, a, b): ", NormalCdf(x, a, b))
>>> print ("dist_normal(a, b).cdf(x): ", dist_normal(a, b).cdf(x))
6.35635234625645256156156145614561356E+00
```

`math53.`**`normal_qtf`**(*mu=0*, *sigma=1*, *q*)

Returns qtf(q), the value of the quantile function (*Qtf*) of the normal distribution:

$$\text{qtf}(q) = \mu - \sigma\sqrt{2} \cdot \text{erfc}^{-1}(2q).$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("NormalQtf(q, a, b): ", NormalQtf(q, a, b))
>>> print ("dist_normal(a, b).qtf(q): ", dist_normal(a, b).qtf(q))
6.35635234625645256156156145614561356E+00
```

`class` `ctx.`**`dist_normal`**(*mu*, *sigma*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

The normal distribution is a continuous probability distribution with mean $\mu \in \mathbb{R}$, standard deviation $\sigma > 0$, and the support interval $(-\infty, +\infty)$. See also Wikipedia [1161], MathWorld [829], BoostMath [67], R (Statistical System) [524], Mpmath [541], Mpmath [537].

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.nrdtrimn.html#scipy.special.nrdtrimn

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.nrdtrisd.html#scipy.special.nrdtrisd

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.ndtr.html#scipy.special.ndtr

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.log_ndtr.html#scipy.special.log_ndtr

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.ndtri.html#scipy.special.ndtri

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.ndtri_exp.html#scipy.special.ndtri_exp

`dist_normal.pdf(`x`)`

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a normal distribution:

$$\text{pdf}_X(x) = \phi(x) = \frac{1}{\sqrt{2\pi\sigma^2}} e^{-\frac{(x-\mu)^2}{2\sigma^2}}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", normal(mu, sigma).pdf(x))
6.356352346256452561561561456135 6E-20
```

`dist_normal.cdf(`x`)`

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a normal distribution:

$$\text{cdf}_X(x) = \Phi(x) = \frac{1}{2}\text{erfc}\left(-\frac{x-\mu}{\sigma\sqrt{2}}\right).$$

Here $\text{erf}(\cdot)$ and $\text{erf}^{-1}(\cdot)$ are the error function and its functional inverse, respectively.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", normal(mu, sigma).pdf(x))
6.356352346256452561561561456135 6E-20
```

`dist_normal.sf(`x`)`

Returns $\text{sf}_X(x)$, the survival function (sf) of a random variable X, following a normal distribution:

$$\text{sf}_X(x) = 1 - \Phi(x) = \frac{1}{2}\text{erfc}\left(\frac{x-\mu}{\sigma\sqrt{2}}\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", normal(mu, sigma).pdf(x))
sf: 6.356352346256452561561561456135 6E-20
```

`dist_normal.qtf(`q`)`

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following a normal distribution:

$$\text{qtf}_X(q) = \mu - \sigma\sqrt{2} \cdot \text{erfc}^{-1}(2q).$$

Here $\text{erf}(\cdot)$ and $\text{erf}^{-1}(\cdot)$ are the error function and its functional inverse, respectively.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", normal(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_normal.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following a normal distribution:

$$\text{isf}_X(q) = \mu + \sigma\sqrt{2} \cdot \text{erfc}^{-1}(2q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", normal(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_normal.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following a normal distribution:

$$C_X(t) = \exp\left(i\mu t - \tfrac{1}{2}\sigma^2 t^2\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", normal(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_normal.**m_x**(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following a normal distribution:

$$M_X(t) = \exp\left(\mu t + \tfrac{1}{2}\sigma^2 t^2\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", normal(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_normal.**k_x**(t, *k=0*)

Returns $K_X(t)$, the cumulant generating function, and its j^{th} derivatives, $K_X^{(j)}(t), j = 1 \ldots k$, of a random variable X, following a normal distribution:

$$K_X(t) = \mu t + \tfrac{1}{2}\sigma^2 t^2,$$

$$K_X^{(1)}(t) = \mu + \sigma^2 t, \quad K_X^{(2)}(t) = \sigma^2, \quad K_X^{(j)}(t) = 0, \quad j > 2.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", normal(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

dist_normal.**moments**(k)

Returns the first j raw moments, $\mu_j, j = 1 \dots k$, of a random variable X, following a normal distribution: the moments are calculated from the cumulants.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", normal(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_normal.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \dots k$, of a random variable X, following a normal distribution:

$$\kappa_1 = \mu, \quad \kappa_2 = \sigma^2, \quad \kappa_j = 0, \quad j > 2.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", normal(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

4.6.5 Boost: Skew normal Distribution

The following functions return the pdf, cdf, qtf or boost class of the skew normal distribution with location $a \in \mathbb{R}$, scale $b > 0$, shape $c \in \mathbb{R}$, and the support interval $(-\infty, +\infty)$.

See also Wikipedia [1186], MathWorld [256], BoostMath [86], Haas [358].

`math53.skewnormal_pdf`(a, b, c, x)

Returns pdf(x), the value of the probability density function (*Pdf*) of the skew normal distribution:

$$\text{pdf}(x) = \frac{2}{b}\phi\left(\frac{x-a}{b}\right)\Phi\left(c\left(\frac{x-a}{b}\right)\right).$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("SkewnormalPdf(x, a, b): ", SkewnormalPdf(x, a, b))
>>> print ("dist_skewnormal(a, b).pdf(x): ", dist_skewnormal(a, b).pdf(x))
6.35635234625645256156156145613 56E+00
```

`math53.skewnormal_cdf`(a, b, c, x)

Returns cdf(x), the value of the cumulative distribution function (*Cdf*) of the skew normal distribution:

$$\text{cdf}(x) = \Phi\left(\frac{x-a}{b}\right) - 2T\left(\frac{x-a}{b}, c\right).$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("SkewnormalCdf(x, a, b): ", SkewnormalCdf(x, a, b))
>>> print ("dist_skewnormal(a, b).cdf(x): ", dist_skewnormal(a, b).cdf(x))
6.35635234625645256156156145613 56E+00
```

`math53.skewnormal_qtf`(a, b, c, q)

Returns qtf(q), the value of the quantile function (*Qtf*) of the skew normal distribution:

There is no known closed form for qtf(q): it computed with Newton iterations where the starting values are from the corresponding Boost functions (in double precision).

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("SkewnormalQtf(q, a, b): ", SkewnormalQtf(q, a, b))
>>> print ("dist_skewnormal(a, b).qtf(q): ", dist_skewnormal(a, b).qtf(q))
6.35635234625645256156156145613 56E+00
```

class `ctx.dist_skewnormal`(a, b, c)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

The skew normal distribution is a continuous probability distribution with location $a \in \mathbb{R}$, scale $b > 0$, shape $c \in \mathbb{R}$, and the support interval $(-\infty, +\infty)$. See also Wikipedia [1186], MathWorld [256], BoostMath [86], Witkovský [1487], Haas [358].

dist_skewnormal.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a skew normal distribution:

$$\text{pdf}_X(x) = \frac{2}{b}\phi\left(\frac{x-a}{b}\right)\Phi\left(c\left(\frac{x-a}{b}\right)\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", mp_skewnormal(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_skewnormal.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a skew normal distribution:

$$\text{cdf}_X(x) = \Phi\left(\frac{x-a}{b}\right) - 2T\left(\frac{x-a}{b}, c\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", mp_skewnormal(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_skewnormal.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function function (sf) of a random variable X, following a skew normal distribution:

$$\text{sf}_X(x) = \Phi\left(-\frac{x-a}{b}\right) + 2T\left(\frac{x-a}{b}, c\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", mp_skewnormal(mu, sigma).pdf(x))
sf: 6.35635234625645256156156145613 56E-20
```

dist_skewnormal.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function function (qtf) of a random variable X, following a skew normal distribution:

There is no known closed form for $\text{qtf}_X(q)$ or $\text{isf}_X(q)$: These functions are computed with Newton iterations where the starting values are from the corresponding Boost functions (in double precision).

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", mp_skewnormal(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_skewnormal.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function function (isf) of a random variable X, following a skew normal distribution:

There is no known closed form for $\text{qtf}_X(q)$ or $\text{isf}_X(q)$: These functions are computed with Newton iterations where the starting values are from the corresponding Boost functions (in double precision).

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", mp_skewnormal(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_skewnormal.**c_x**(*t*)

Returns $C_X(t)$, the characteristic function of a random variable X, following a skew normal distribution:

$$C_X(t) = 2\exp\left(ita - \frac{b^2t^2}{2}\right)\Phi(itbd).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", mp_skewnormal(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_skewnormal.**m_x**(*t*)

Returns $M_X(t)$, the moment generating function of a random variable X, following a skew normal distribution:

$$M_X(t) = 2\exp\left(ta + \frac{b^2t^2}{2}\right)\Phi(tbd).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", mp_skewnormal(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_skewnormal.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following a skew normal distribution:

$$K_X(t) = ta + \frac{b^2t^2}{2} + \log\left(2\Phi(tbd)\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", mp_skewnormal(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

dist_skewnormal.**moments**(*k*)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following a skew normal distribution:

$$\mu'_{2r+1} = \sqrt{\frac{2}{\pi}}\frac{(2r+1)!}{2^r r!}\sum_{j=0}^{r}(-1)^j\binom{r}{j}\frac{d^{2j+1}}{2j+1}$$

The even moments are equal to those of the standard normal. Hass 2012: Odd Moments

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", mp_skewnormal(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_skewnormal.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following a skew normal distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", mp_skewnormal(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

4.6.6 Boost: Wald (or Inverse Gaussian) distribution

The following functions return the pdf, cdf, qtf or boost class of the Wald distribution with mean $\mu > 0$, scale $b > 0$, and the support interval $(0, +\infty)$.

See also Wikipedia [1150], MathWorld [821], BoostMath [59], Ehrhardt [295] (3.9.32).

`math53.`**`wald_pdf`**(*mu*, *b*, *x*)

Returns pdf(x), the value of the probability density function (*Pdf*) of the Wald distribution:

$$\text{pdf}(x) = \sqrt{\frac{b}{2\pi x^3}} \exp\left(\frac{-b(x-\mu)^2}{2\mu^2 x}\right).$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("WaldPdf(x, a, b): ", WaldPdf(x, a, b))
>>> print ("dist_wald(a, b).pdf(x): ", dist_wald(a, b).pdf(x))
6.356352346256452561561561561456135 6E+00
```

`math53.`**`wald_cdf`**(*mu*, *b*, *x*)

Returns cdf(x), the value of the cumulative distribution function (*Cdf*) of the Wald distribution:

$$\text{cdf}(x) = \Phi\left(\sqrt{\frac{b}{x}}\left(\frac{x}{\mu} - 1\right)\right) + \exp\left(\frac{2b}{\mu}\right)\Phi\left(-\sqrt{\frac{b}{x}}\left(\frac{x}{\mu} + 1\right)\right).$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("WaldCdf(x, a, b): ", WaldCdf(x, a, b))
>>> print ("dist_wald(a, b).cdf(x): ", dist_wald(a, b).cdf(x))
6.356352346256452561561561561456135 6E+00
```

`math53.`**`wald_qtf`**(*mu*, *b*, *q*)

Returns qtf(q), the value of the quantile function (*Qtf*) of the Wald distribution:

There is no known closed form for qtf(q): it is computed with Newton iterations where the starting values are from the corresponding Boost functions (in double precision).

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("WaldQtf(q, a, b): ", WaldQtf(q, a, b))
>>> print ("dist_wald(a, b).qtf(q): ", dist_wald(a, b).qtf(q))
6.356352346256452561561561561456135 6E+00
```

`class` `ctx.`**`dist_wald`**(*mu*, *b*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

The Wald (or inverse Gaussian) distribution is a continuous probability distribution with mean $\mu > 0$, scale $b > 0$, and the support interval $(0, +\infty)$. See also Wikipedia [1150], MathWorld [821], BoostMath [59], Witkovský [1463].

dist_wald.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a Wald distribution:

$$\text{pdf}_X(x) = \sqrt{\frac{b}{2\pi x^3}} \exp\left(\frac{-b(x-\mu)^2}{2\mu^2 x}\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", wald(mu, sigma).pdf(x))
6.356352346256452561561561561456 1356E-20
```

dist_wald.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a Wald distribution:

$$\text{cdf}_X(x) = \Phi\left(\sqrt{\frac{b}{x}}\left(\frac{x}{\mu} - 1\right)\right) + \exp\left(\frac{2b}{\mu}\right)\Phi\left(-\sqrt{\frac{b}{x}}\left(\frac{x}{\mu} + 1\right)\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", wald(mu, sigma).pdf(x))
6.356352346256452561561561561456 1356E-20
```

dist_wald.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function (sf) of a random variable X, following a Wald distribution:

$$\text{sf}_X(x) = \Phi\left(-\sqrt{\frac{b}{x}}\left(\frac{x}{\mu} - 1\right)\right) - \exp\left(\frac{2b}{\mu}\right)\Phi\left(-\sqrt{\frac{b}{x}}\left(\frac{x}{\mu} + 1\right)\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", wald(mu, sigma).pdf(x))
sf: 6.356352346256452561561561561456 1356E-20
```

dist_wald.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following a Wald distribution:

There is no known closed form for $\text{qtf}_X(q)$ or $\text{isf}_X(q)$: These functions are computed with Newton iterations where the starting values are from the corresponding Boost functions (in double precision).

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", wald(mu, sigma).qtf(q))
qtf: 6.356352346256452561561561561456 1356E+00
```

dist_wald.**isf**(*q*)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following a Wald distribution:

There is no known closed form for $\text{qtf}_X(q)$ or $\text{isf}_X(q)$: These functions are computed with Newton iterations where the starting values are from the corresponding Boost functions (in double precision).

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", wald(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_wald.**c_x**(*t*)

Returns $C_X(t)$, the characteristic function of a random variable X, following a Wald distribution:

$$C_X(t) = \exp\left[\frac{\lambda}{\mu}\left(1 - \sqrt{1 - \frac{2\mu^2 it}{\lambda}}\right)\right].$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", wald(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_wald.**m_x**(*t*)

Returns $M_X(t)$, the moment generating function of a random variable X, following a Wald distribution:

$$M_X(t) = \exp\left[\frac{\lambda}{\mu}\left(1 - \sqrt{1 - \frac{2\mu^2 t}{\lambda}}\right)\right].$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("m_x: ", wald(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_wald.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function, and its j^{th} derivatives, $K_X^{(j)}(t), j = 1 \ldots k$, of a random variable X, following a Wald distribution:

$$K_X(t) = \frac{\lambda}{\mu}\left(1 - \sqrt{1 - \frac{2\mu^2 t}{\lambda}}\right).$$

$$K_X^{(j)}(t) = tbd.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", wald(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

dist_wald.**moments**(k)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following a Wald distribution. The moments are calculated from the cumulants.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", wald(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_wald.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following a Wald distribution.

$$\kappa_X(n+1) = \kappa_{X,n+1} = \frac{(2n)!}{2^n n! \mu^{2n+1} \lambda^n}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", wald(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

4.6.7 Birnbaum-Saunders Distribution

class ctx.**dist_birnb_saunders**(*mu*, *sigma*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The Birnbaum-Saunders distribution is a continuous probability distribution with mean $\mu \in \mathbb{R}$, standard deviation $\sigma > 0$, and the support interval $(-\infty, +\infty)$. See also Wikipedia [1169], MathWorld [246], Balakrishnan and Kundi [25].

dist_birnb_saunders.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following an Birnbaum-Saunders distribution:

$$\text{pdf}_X(x) = \frac{1}{2\sqrt{2\pi}\alpha\beta}\left[\sqrt{\frac{t}{\beta}} + \sqrt{\frac{\beta^3}{t^3}}\right] \exp\left[-\frac{1}{2\alpha^2}\left(\frac{t}{\beta} + \frac{\beta}{t} - 2\right)\right].$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", mp_birnb_saunders(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_birnb_saunders.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following an Birnbaum-Saunders distribution:

$$\text{cdf}_X(x) = \Phi\left[\frac{1}{\alpha}\left(\sqrt{\frac{t}{\beta}} - \sqrt{\frac{\beta}{t}}\right)\right].$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", mp_birnb_saunders(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_birnb_saunders.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function function (sf) of a random variable X, following an Birnbaum-Saunders distribution:

$$\mathrm{sf}_X(x) = 1 - \Phi\left[\frac{1}{\alpha}\left(\sqrt{\frac{t}{\beta}} - \sqrt{\frac{\beta}{t}}\right)\right].$$

```

```

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", mp_birnb_saunders(mu, sigma).pdf(x))
sf: 6.35635234625645256156156145613 56E-20
```

dist_birnb_saunders.**qtf**(q)

Returns $\mathrm{qtf}_X(x)$, the quantile function function (qtf) of a random variable X, following an Birnbaum-Saunders distribution:

$$\mathrm{qtf}_X(q) = \frac{\beta}{4}\left[\alpha Z + \sqrt{(\alpha Z)^2 + 4}\right]^2, \quad Z = \Phi^{-1}(q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", mp_birnb_saunders(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_birnb_saunders.**isf**(q)

Returns $\mathrm{isf}_X(q)$, the inverse survival function function (isf) of a random variable X, following an Birnbaum-Saunders distribution:

$$\mathrm{isf}_X(q) = \frac{\beta}{4}\left[\alpha Z + \sqrt{(\alpha Z)^2 + 4}\right]^2, \quad Z = \Phi^{-1}(1-q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", mp_birnb_saunders(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_birnb_saunders.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following an Birnbaum-Saunders distribution:

$$C_X(t) = \frac{1}{2}\exp\left[\frac{\beta}{\alpha} - \sqrt{\frac{\beta^2}{\alpha^2} - 2it\beta}\right]\left(1 + \sqrt{\frac{1}{1 - 2it\alpha^2/\beta}}\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", mp_birnb_saunders(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

dist_birnb_saunders.**m_x**(*t*)

Returns $M_X(t)$, the moment generating function of a random variable X, following an Birnbaum-Saunders distribution:

$$M_X(t) = \frac{1}{2}\exp\left[\frac{\beta}{\alpha} - \sqrt{\frac{\beta^2}{\alpha^2} - 2t\beta}\right]\left(1 + \sqrt{\frac{1}{1 - 2t\alpha^2/\beta}}\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("m_x: ", mp_birnb_saunders(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

dist_birnb_saunders.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following an Birnbaum-Saunders distribution:

$$K_X(t) = \frac{\beta}{\alpha} - \sqrt{\frac{\beta^2}{\alpha^2} - 2t\beta} + \log\left(1 + \sqrt{\frac{1}{1 - 2t\alpha^2/\beta}}\right) - \log(2).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", mp_birnb_saunders(mu, sigma).k_x(t, k))
6.356352346256452561561561561456135 6E+00
```

dist_birnb_saunders.**moments**(*k*)

Returns the first j central moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following an Birnbaum-Saunders distribution (Wikipedia). The raw moments are calculated from the central moments.

$$\mu_X(r) = \beta^r \sum_{j=0}^{r} \binom{2r}{2j} \sum_{i=0}^{j} \binom{i}{j} \frac{(2r - 2j + 2i)!}{2^{r-j+i}(r - j + i)!}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", mp_birnb_saunders(mu, sigma).moments(k))
6.356352346256452561561561561456135 6E+00
```

dist_birnb_saunders.**cumulants**(*k*)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following an Birnbaum-Saunders distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", mp_birnb_saunders(mu, sigma).cumulants(k))
6.356352346256452561561561561456135 6E+00
```

4.6.8 Exponentially Modified Gaussian (EMG) distribution

class ctx.**dist_emg**(*n1*, *n2*, *lambda*, ***kwargs*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

These functions return PDF, CDF, and ICDF of the exponentially modified Gaussian distribution with location a, scale $b > 0$, and the support interval $(-\infty, +\infty)$:

See also: Wikipedia [1196].

dist_emg.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following an exponentially modified Gaussian distribution:

$$\mathrm{pdf}_X(x) = f(x;\mu,\sigma,\lambda) = \frac{\lambda}{2} e^{\frac{\lambda}{2}(2\mu+\lambda\sigma^2-2x)} \operatorname{erfc}\left(\frac{\mu+\lambda\sigma^2-x}{\sqrt{2}\sigma}\right)$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", dist_emg(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_emg.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following an exponentially modified Gaussian distribution:

$$\mathrm{cdf}_X(x) = \Phi(x,\mu,\sigma) - \tfrac{1}{2} e^{\frac{\lambda}{2}(2\mu+\lambda\sigma^2-2x)} \operatorname{erfc}\left(\frac{\mu+\lambda\sigma^2-x}{\sqrt{2}\sigma}\right)$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", dist_emg(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_emg.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function function (sf) of a random variable X, following an exponentially modified Gaussian distribution:

$$\mathrm{sf}_X(x) = \Phi(-x,\mu,\sigma) + \tfrac{1}{2} e^{\frac{\lambda}{2}(2\mu+\lambda\sigma^2-2x)} \operatorname{erfc}\left(\frac{\mu+\lambda\sigma^2-x}{\sqrt{2}\sigma}\right)$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", dist_emg(mu, sigma).pdf(x))
sf: 6.3563523462564525615615615614561356E-20
```

dist_emg.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function function (qtf) of a random variable X, following an exponentially modified Gaussian distribution:

$$\text{qtf}_X(q) = ??$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", dist_emg(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_emg.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function function (isf) of a random variable X, following an exponentially modified Gaussian distribution:

$$\text{isf}_X(q) = ??$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", dist_emg(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_emg.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following an exponentially modified Gaussian distribution:

$$C_X(t) = \left(1 - \frac{it}{\lambda}\right)^{-1} \exp\left(i\mu t - \tfrac{1}{2}\sigma^2 t^2\right)$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", dist_emg(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_emg.**m_x**(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following an exponentially modified Gaussian distribution:

$$M_X(t) = \left(1 - \frac{t}{\lambda}\right)^{-1} \exp\left(\mu t + \tfrac{1}{2}\sigma^2 t^2\right)$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("m_x: ", dist_emg(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_emg.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following an exponentially modified Gaussian distribution:

$$K_X(t) = \log(M_X(t))$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", dist_emg(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

dist_emg.**moments**(*k*)

Returns the first j central moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following an exponentially modified Gaussian distribution. The moments are calculated from their definition:

$$\mu'_X(r) = E(X^r) = \int_0^1 x^r \text{pdf}_X(x) \text{d}x$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", dist_emg(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_emg.**cumulants**(*k*)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following an exponentially modified Gaussian distribution. The cumulants are calculated from the moments.

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", dist_emg(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

4.6.9 Folded normal distribution

class ctx.**dist_folded_normal**(*n1*, *n2*, *lambda*, ***kwargs*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

These functions return PDF, CDF, and ICDF of the folded normal distribution with location a, scale $b > 0$, and the support interval $(-\infty, +\infty)$:

See also: Wikipedia [1198], Tsagris *et al.* [784], Reig *et al.* [473].

dist_folded_normal.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following an folded normal distribution:

$$\text{pdf}_X(x) = f_Y(x; \mu, \sigma^2) = \frac{1}{\sqrt{2\pi\sigma^2}} e^{-\frac{(x-\mu)^2}{2\sigma^2}} + \frac{1}{\sqrt{2\pi\sigma^2}} e^{-\frac{(x+\mu)^2}{2\sigma^2}}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", dist_folded_normal(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_folded_normal.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following an folded normal distribution:

$$\text{cdf}_X(x) = F_Y(x; \mu, \sigma^2) = \frac{1}{2}\left[\text{erf}\left(\frac{x+\mu}{\sqrt{2\sigma^2}}\right) + \text{erf}\left(\frac{x-\mu}{\sqrt{2\sigma^2}}\right)\right]$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", dist_folded_normal(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_folded_normal.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function function (sf) of a random variable X, following an folded normal distribution:

$$\text{sf}_X(x) = 1 - F_Y(x; \mu, \sigma^2) = 1 - \frac{1}{2}\left[\text{erf}\left(\frac{x+\mu}{\sqrt{2\sigma^2}}\right) + \text{erf}\left(\frac{x-\mu}{\sqrt{2\sigma^2}}\right)\right]$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", dist_folded_normal(mu, sigma).pdf(x))
sf: 6.3563523462564525615615615614561356E-20
```

dist_folded_normal.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function function (qtf) of a random variable X, following an folded normal distribution:

$$\text{qtf}_X(q) = ??$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", dist_folded_normal(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_folded_normal.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function function (isf) of a random variable X, following an folded normal distribution:

$$\text{isf}_X(q) = ??$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", dist_folded_normal(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_folded_normal.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following an folded normal distribution:

$$C_X(t) = e^{\frac{-\sigma^2 t^2}{2} + i\mu t}\Phi\left(\frac{\mu}{\sigma} + i\sigma t\right) + e^{-\frac{\sigma^2 t^2}{2} - i\mu t}\Phi\left(-\frac{\mu}{\sigma} + i\sigma t\right).$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", dist_folded_normal(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_folded_normal.**m_x**(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following an folded normal distribution:

$$M_X(t) = e^{\frac{\sigma^2 t^2}{2} + \mu t}\Phi\left(\frac{\mu}{\sigma} + \sigma t\right) + e^{\frac{\sigma^2 t^2}{2} - \mu t}\Phi\left(-\frac{\mu}{\sigma} + \sigma t\right).$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("m_x: ", dist_folded_normal(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_folded_normal.**k_x**(t, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following an folded normal distribution:

$$K_X(t) = \left(\frac{\sigma^2 t^2}{2} + \mu t\right) + \log\left\{1 - \Phi\left(-\frac{\mu}{\sigma} - \sigma t\right) + e^{\frac{\sigma^2 t^2}{2} - \mu t}\left[1 - \Phi\left(\frac{\mu}{\sigma} - \sigma t\right)\right]\right\}.$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", dist_folded_normal(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

dist_folded_normal.**moments**(k)

Returns the first j central moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following an folded normal distribution. The moments are calculated from their definition:

$$\mu'_X(r) = E(X^r) = \int_0^1 x^r \mathrm{pdf}_X(x) \mathrm{d}x$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", dist_folded_normal(mu, sigma).moments(k))
6.356352346256452561561561561456 1356E+00
```

dist_folded_normal.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following an folded normal distribution. The cumulants are calculated from the moments.

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", dist_folded_normal(mu, sigma).cumulants(k))
6.356352346256452561561561561456 1356E+00
```

4.6.10 Half-normal distribution

class ctx.**dist_half_normal**(*sigma*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The half-normal distribution is a continuous probability distribution with standard deviation $\sigma > 0$, and the support interval $(0, +\infty)$. See also Wikipedia [1172], MathWorld [819], Witkovský [1479], .

dist_half_normal.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following an half-normal distribution:

$$\mathrm{pdf}_X(x) = \frac{\sqrt{2}}{\sigma\sqrt{\pi}} \exp\left(\frac{x^2}{2\sigma^2}\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", half_normal(mu, sigma).pdf(x))
6.356352346256452561561561561456135 6E-20
```

dist_half_normal.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following an half-normal distribution:

$$\mathrm{cdf}_X(x) = \mathrm{erf}\left(\frac{x}{\sigma\sqrt{2}}\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", half_normal(mu, sigma).pdf(x))
6.356352346256452561561561561456135 6E-20
```

dist_half_normal.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following an half-normal distribution:

$$\mathrm{sf}_X(x) = \mathrm{erfc}\left(\frac{x}{\sigma\sqrt{2}}\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", half_normal(mu, sigma).pdf(x))
sf: 6.356352346256452561561561561456135 6E-20
```

dist_half_normal.**qtf**(q)

Returns $\mathrm{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following an half-normal distribution:

$$\mathrm{qtf}_X(q) = \sigma\sqrt{2} \cdot \mathrm{erf}^{-1}(q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", half_normal(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_half_normal.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following an half-normal distribution:

$$\text{isf}_X(q) = \sigma\sqrt{2} \cdot \text{erfc}^{-1}(q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", half_normal(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_half_normal.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following an half-normal distribution:

$$C_X(t) = M\left(\frac{3}{2}, \frac{1}{2}\frac{-t^2}{2}\right) + \frac{2\sqrt{2}\,it}{\sqrt{\pi}} M\left(2, \frac{3}{2}, \frac{-t^2}{2}\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", half_normal(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_half_normal.**m_x**(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following an half-normal distribution:

$$M_X(t) = M\left(\frac{3}{2}, \frac{1}{2}\frac{t^2}{2}\right) + \frac{2\sqrt{2}\,t}{\sqrt{\pi}} M\left(2, \frac{3}{2}, \frac{t^2}{2}\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("m_x: ", half_normal(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_half_normal.**k_x**(t, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following an half-normal distribution:

$$K_X(t) = \log\left[M\left(\frac{3}{2}, \frac{1}{2}\frac{t^2}{2}\right) + \frac{2\sqrt{2}\,t}{\sqrt{\pi}} M\left(2, \frac{3}{2}, \frac{t^2}{2}\right)\right].$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", half_normal(mu, sigma).k_x(t, k))
6.356352346256452561561561561456 1356E+00
```

dist_half_normal.**moments**(k)

Returns the first j central moments, $\mu_j, j = 1 \dots k$, of a random variable X, following an half-normal distribution (Wikipedia). The raw moments are calculated from the central moments.

$$\mu_X(r) = \begin{cases} \sqrt{\frac{2}{\pi}} k! \alpha^{2k-1} & \text{for } n = 2k-1, \\ (n+1)!! \alpha^n & \text{for } n \text{ even}, \end{cases}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", half_normal(mu, sigma).moments(k))
6.356352346256452561561561561456 1356E+00
```

dist_half_normal.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \dots k$, of a random variable X, following an half-normal distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", half_normal(mu, sigma).cumulants(k))
6.356352346256452561561561561456 1356E+00
```

4.6.11 Johnson S_B distribution

class ctx.**dist_johnson_sb**(*n1*, *n2*, *lambda*, ***kwargs*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

These functions return PDF, CDF, and ICDF of the Johnson S_B distribution with location a, scale $b > 0$, and the support interval $(-\infty, +\infty)$:

See also: Wikipedia [1208], Jodrá [382], Hill *et al.* [370].

dist_johnson_sb.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following an Johnson S_B distribution:

$$\mathrm{pdf}_X(x) = f(x;a,b) = \frac{b}{u(1-u)}\phi\left(a + b\log\left(\frac{u}{1-u}\right)\right), \quad \text{where } u = (x-\xi)/\lambda, a = \gamma, b = \delta.$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", dist_johnson_sb(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_johnson_sb.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following an Johnson S_B distribution:

$$\mathrm{cdf}_X(x) = \Phi\left(a + b\log\left(\frac{x}{1-x}\right)\right), \quad \text{where } u = (x-\xi)/\lambda, a = \gamma, b = \delta$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", dist_johnson_sb(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_johnson_sb.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function function (sf) of a random variable X, following an Johnson S_B distribution:

$$\mathrm{sf}_X(x) = \Phi\left(-a - b\log\left(\frac{x}{1-x}\right)\right), \quad \text{where } u = (x-\xi)/\lambda, a = \gamma, b = \delta$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", dist_johnson_sb(mu, sigma).pdf(x))
sf: 6.35635234625645256156156145613 56E-20
```

dist_johnson_sb.**qtf**(q)

Returns $\mathrm{qtf}_X(x)$, the quantile function function (qtf) of a random variable X, following an Johnson S_B distribution:

$$\mathrm{qtf}_X(q) = \lambda \cdot u + \xi, u = \frac{1}{1 + \exp\left(-\frac{1}{b}\left(\Phi^{-1}(q) - a\right)\right)}, \quad \text{where } a = \gamma, b = \delta.$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", dist_johnson_sb(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

`dist_johnson_sb.isf(`q`)`

Returns $\text{isf}_X(q)$, the inverse survival function function (isf) of a random variable X, following an Johnson S_B distribution:

$$\text{isf}_X(q) = \lambda \cdot u + \xi, u = \frac{1}{1 + \exp\left(-\frac{1}{b}\left(\Phi^{-1}(1-q) - a\right)\right)}, \quad \text{where } a = \gamma, b = \delta.$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", dist_johnson_sb(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

`dist_johnson_sb.c_x(`t`)`

Returns $C_X(t)$, the characteristic function of a random variable X, following an Johnson S_B distribution:

$$C_X(t) = \int_0^1 e^{itx} \text{pdf}_X(x) \text{d}x$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", dist_johnson_sb(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

`dist_johnson_sb.m_x(`t`)`

Returns $M_X(t)$, the moment generating function of a random variable X, following an Johnson S_B distribution:

$$M_X(t) = \int_0^1 e^{tx} \text{pdf}_X(x) \text{d}x$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("m_x: ", dist_johnson_sb(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

`dist_johnson_sb.k_x(`t`, `*k=0*`)`

Returns $K_X(t)$, the cumulant generating function of a random variable X, following an Johnson S_B distribution:

$$K_X(t) = \log(M_X(t))$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", dist_johnson_sb(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

dist_johnson_sb.**moments**(k)

Returns the first j central moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following an Johnson S_B distribution. The moments are calculated from their definition:

$$\mu'_X(r) = E(X^r) = \int_0^1 x^r \text{pdf}_X(x) \text{d}x$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", dist_johnson_sb(mu, sigma).moments(k))
6.356352346256452561561561561456 1356E+00
```

dist_johnson_sb.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following an Johnson S_B distribution. The cumulants are calculated from the moments.

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", dist_johnson_sb(mu, sigma).cumulants(k))
6.356352346256452561561561561456 1356E+00
```

4.6.12 Johnson S_U distribution

class ctx.**dist_johnson_su**(*n1*, *n2*, *lambda*, ***kwargs*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

These functions return PDF, CDF, and ICDF of the Johnson S_U distribution with location a, scale $b > 0$, and the support interval $(-\infty, +\infty)$:

See also: Wikipedia [1208], Jodrá [382], Hill *et al.* [370].

dist_johnson_su.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following an Johnson S_U distribution:

$$\mathrm{pdf}_X(x) = \frac{b}{\sqrt{x^2+1}}\phi\left(a + b\log\left(x + \sqrt{x^2+1}\right)\right), \quad \text{where } u = (x-\xi)/\lambda, a = \gamma, b = \delta.$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", dist_johnson_su(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_johnson_su.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following an Johnson S_U distribution:

$$\mathrm{cdf}_X(x) = \Phi\left(a + b\log\left(x + \sqrt{x^2+1}\right)\right), \quad \text{where } u = (x-\xi)/\lambda, a = \gamma, b = \delta$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", dist_johnson_su(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_johnson_su.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function function (sf) of a random variable X, following an Johnson S_U distribution:

$$\mathrm{sf}_X(x) = \Phi\left(-a - b\log\left(x + \sqrt{x^2+1}\right)\right), \quad \text{where } u = (x-\xi)/\lambda, a = \gamma, b = \delta$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", dist_johnson_su(mu, sigma).pdf(x))
sf: 6.3563523462564525615615615614561356E-20
```

dist_johnson_su.**qtf**(q)

Returns $\mathrm{qtf}_X(x)$, the quantile function function (qtf) of a random variable X, following an Johnson S_U distribution:

$$\mathrm{qtf}_X(q) = \sinh\left(\frac{\Phi^{-1}(q) - a}{b}\right), \quad \text{where } u = (x-\xi)/\lambda, a = \gamma, b = \delta$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", dist_johnson_su(mu, sigma).qtf(q))
qtf: 6.356352346256452561561561561456 1356E+00
```

`dist_johnson_su.isf(`q`)`

Returns $\text{isf}_X(q)$, the inverse survival function function (isf) of a random variable X, following an Johnson S_U distribution:

$$\text{isf}_X(q) = \sinh\left(\frac{\Phi^{-1}(1-q) - a}{b}\right), \quad \text{where } u = (x-\xi)/\lambda, a = \gamma, b = \delta$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", dist_johnson_su(mu, sigma).isf(q))
6.356352346256452561561561456 1356E+00
```

`dist_johnson_su.c_x(`t`)`

Returns $C_X(t)$, the characteristic function of a random variable X, following an Johnson S_U distribution:

$$C_X(t) = \int_0^\infty e^{itx} \text{pdf}_X(x) \text{d}x$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", dist_johnson_su(mu, sigma).c_x(t))
6.356352346256452561561561456 1356E+00
```

`dist_johnson_su.m_x(`t`)`

Returns $M_X(t)$, the moment generating function of a random variable X, following an Johnson S_U distribution:

$$M_X(t) = \int_0^1 e^{tx} \text{pdf}_X(x) \text{d}x$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("m_x: ", dist_johnson_su(mu, sigma).c_x(t))
6.356352346256452561561561456 1356E+00
```

`dist_johnson_su.k_x(`t`, `*`k=0`*`)`

Returns $K_X(t)$, the cumulant generating function of a random variable X, following an Johnson S_U distribution:

$$K_X(t) = \log(M_X(t))$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", dist_johnson_su(mu, sigma).k_x(t, k))
6.356352346256452561561561456 1356E+00
```

dist_johnson_su.**moments**(k)

Returns the first j central moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following an Johnson S_U distribution (See Johnson1949, page 163)

If r is even:

$$\mu'_r = 2^{-(r-1)} \sum_{s=0}^{\frac{1}{2}r-1} (-1)^s \binom{r}{s} e^{\frac{1}{2}(r-2s)^2\delta^{-2}} \cosh[(r-2s)(\gamma/\delta)] + (-1)^{\frac{1}{2}r} \frac{1}{2} \binom{r}{\frac{1}{2}r}$$

If r is odd:

$$\mu'_r = 2^{-(r-1)} \sum_{s=0}^{\frac{1}{2}r-1} (-1)^{s+1} \binom{r}{s} e^{\frac{1}{2}(r-2s)^2\delta^{-2}} \sinh[(r-2s)(\gamma/\delta)]$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", dist_johnson_su(mu, sigma).moments(k))
6.356352346256452561561561561456l356E+00
```

dist_johnson_su.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following an Johnson S_U distribution. The cumulants are calculated from the moments.

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", dist_johnson_su(mu, sigma).cumulants(k))
6.356352346256452561561561561456l356E+00
```

4.6.13 Normal maximum distribution, $\rho_{ij,i\neq j} = 0$

class ctx.**dist_nmax_0**(k)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The normal maximum distribution (the distribution of the maximum of $k \geq 1$ independent standard normal variates) is a continuous probability distribution with the support interval $(-\infty, +\infty)$.

Let $X_1, \ldots, X_k$ be a random sample of size k from a $\mathcal{N}(0, \sigma^2)$ distribution. Let s^2 be an independent mean square estimate of σ with n degrees of freedom. Then

$$Q_1 = \frac{\max X_j}{s}, \quad j = 1, \ldots, k$$

follows a studentized maximum distribution with k and n degrees of freedom, and

$$Q_2 = \frac{\max|X_j|}{s}, \quad j = 1, \ldots, k$$

follows a Studentized Maximum Modulus distribution with k and n degrees of freedom.

See also Stoline and Ury [505], Hochberg and Tamhane [371], Narula [420].

For tables see Bechhofer and Dunnett [26], Stoline and Ury [505], and Hahn and Hendrickson [359].

dist_nmax_0.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a normal maximum distribution:

$$\text{pdf}_X(x) = f_{\text{nmax0}}(x, k) = k \cdot \Phi(x)^{k-1} \cdot \phi(x).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", mp_smm(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_nmax_0.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a normal maximum distribution:

$$\text{cdf}_X(x) = F_{\text{nmax0}}(x, k) = [\Phi(x)]^k.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", mp_smm(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_nmax_0.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function function (sf) of a random variable X, following a normal maximum distribution:

$$\text{sf}_X(x) = 1 - [\Phi(x)]^k.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", mp_smm(mu, sigma).pdf(x))
sf: 6.356352346256452561561561561456135 6E-20
```

`dist_nmax_0.qtf`(q)

Returns $\text{qtf}_X(x)$, the quantile function function (qtf) of a random variable X, following a normal maximum distribution:

$$\text{qtf}_X(x) = \Phi^{-1}\left(q^{1/k}\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", mp_smm(mu, sigma).qtf(q))
qtf: 6.356352346256452561561561561456135 6E+00
```

`dist_nmax_0.isf`(q)

Returns $\text{isf}_X(q)$, the inverse survival function function (isf) of a random variable X, following a normal maximum distribution:

$$\text{isf}_X(x) = \Phi^{-1}\left((1-q)^{1/k}\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", mp_smm(mu, sigma).isf(q))
6.356352346256452561561561561456135 6E+00
```

`dist_nmax_0.c_x`(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following a normal maximum distribution:

$$C_X(t) = \int_0^\infty e^{itx}\text{pdf}_X(x)\mathrm{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", mp_smm(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

`dist_nmax_0.m_x`(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following a normal maximum distribution:

$$M_X(t) = \int_0^\infty e^{tx}\text{pdf}_X(x)\mathrm{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", mp_smm(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

dist_nmax_0.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following a normal maximum distribution:

$$K_X(t) = \log\left(M_X(t)\right)$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", mp_smm(mu, sigma).c_x(t))
6.356352346256452561561561561456 1356E+00
```

dist_nmax_0.**moments**(*k*)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following a normal maximum distribution. The rth moments only exists for $n_2 > 2r$.

$$\mu'_X(r) = \int_0^\infty x^r \mathrm{pdf}_X(x)\mathrm{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", mp_smm(mu, sigma).moments(k))
6.356352346256452561561561561456 1356E+00
```

dist_nmax_0.**cumulants**(*k*)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following a central Studentized Maximum Modulus distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", mp_smm(mu, sigma).cumulants(k))
6.356352346256452561561561561456 1356E+00
```

4.6.14 Normal maximum modulus distribution, $\rho_{ij,i\neq j} = 0$

class ctx.**dist_nmm_0**(k)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The normal maximum modulus distribution (the distribution of the maximum of the absolute value of $k \geq 1$ independent standard normal variates) is a continuous probability distribution with the support interval $(0, +\infty)$.

Let $X_1, \ldots, X_k$ be a random sample of size k from a $\mathcal{N}(0, \sigma^2)$ distribution. Let s^2 be an independent mean square estimate of σ with n degrees of freedom. Then

$$Q_1 = \frac{\max X_j}{s}, \quad j = 1, \ldots, k$$

follows a studentized maximum distribution with k and n degrees of freedom, and

$$Q_2 = \frac{\max|X_j|}{s}, \quad j = 1, \ldots, k$$

follows a Studentized Maximum Modulus distribution with k and n degrees of freedom.

See also Stoline and Ury [505], Hochberg and Tamhane [371], Narula [420].

For tables see Bechhofer and Dunnett [26], Stoline and Ury [505], and Hahn and Hendrickson [359].

dist_nmm_0.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a normal maximum modulus distribution:

$$\text{pdf}_X(x) = f_{\text{nmm0}}(x, k) = 2k \cdot (2\Phi(x) - 1)^{k-1} \cdot \phi(x), \quad x > 0.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", mp_smm(mu, sigma).pdf(x))
6.356352346256452561561561456135 6E-20
```

dist_nmm_0.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a normal maximum modulus distribution:

$$\text{cdf}_X(x) = F_{\text{nmm0}}(x, k) = [\Phi(x) - \Phi(-x)]^k = [2\Phi(x) - 1]^k, \quad x > 0.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", mp_smm(mu, sigma).pdf(x))
6.356352346256452561561561456135 6E-20
```

dist_nmm_0.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function function (sf) of a random variable X, following a normal maximum modulus distribution:

$$\text{sf}_X(x) = 1 - [\Phi(x) - \Phi(-x)]^k = 1 - [2\Phi(x) - 1]^k, \quad x > 0.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", mp_smm(mu, sigma).pdf(x))
sf: 6.356352346256452561561561561456 1356E-20
```

`dist_nmm_0.qtf`(q)

Returns $\text{qtf}_X(x)$, the quantile function function (qtf) of a random variable X, following a normal maximum modulus distribution:

$$\text{qtf}_X(x) = \Phi^{-1}\left(\tfrac{1}{2} + \tfrac{1}{2}q^{1/k}\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", mp_smm(mu, sigma).qtf(q))
qtf: 6.356352346256452561561561561456 1356E+00
```

`dist_nmm_0.isf`(q)

Returns $\text{isf}_X(q)$, the inverse survival function function (isf) of a random variable X, following a normal maximum modulus distribution:

$$\text{isf}_X(x) = \Phi^{-1}\left(\tfrac{1}{2} + \tfrac{1}{2}(1-q)^{1/k}\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", mp_smm(mu, sigma).isf(q))
6.356352346256452561561561561456 1356E+00
```

`dist_nmm_0.c_x`(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following a normal maximum modulus distribution:

$$C_X(t) = \int_0^\infty e^{itx}\text{pdf}_X(x)\mathrm{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", mp_smm(mu, sigma).c_x(t))
6.356352346256452561561561561456 1356E+00
```

`dist_nmm_0.m_x`(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following a normal maximum modulus distribution:

$$M_X(t) = \int_0^\infty e^{tx}\text{pdf}_X(x)\mathrm{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", mp_smm(mu, sigma).c_x(t))
6.3563523462564525615615615614561356E+00
```

dist_nmm_0.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following a normal maximum modulus distribution:

$$K_X(t) = \log\left(M_X(t)\right)$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", mp_smm(mu, sigma).c_x(t))
6.3563523462564525615615615614561356E+00
```

dist_nmm_0.**moments**(*k*)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following a normal maximum modulus distribution. The rth moments only exists for $n_2 > 2r$.

$$\mu'_X(r) = \int_0^\infty x^r \mathrm{pdf}_X(x)\mathrm{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", mp_smm(mu, sigma).moments(k))
6.3563523462564525615615615614561356E+00
```

dist_nmm_0.**cumulants**(*k*)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following a central Studentized Maximum Modulus distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", mp_smm(mu, sigma).cumulants(k))
6.3563523462564525615615615614561356E+00
```

4.6.15 Sinh-arcsinh normal distribution

class ctx.**dist_sasnormal**(a, b)

where ctx is dec, mpm, ipm, fpm, gmp or arb.

The sinh-arcsinh normal distribution distribution is a continuous probability distribution with parameters $a > 0$ and $b > 0$, and the support interval $(0, +\infty)$.

See also: Jones and Faddy [389].

dist_sasnormal.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a sinh-arcsinh normal distribution distribution:

$$\text{pdf}_X(x) = \frac{1}{\sqrt{2\pi}} \frac{\delta C_{\epsilon,\delta}(x)}{\sqrt{1+x^2}} \exp\left(-\tfrac{1}{2} S^2_{\epsilon,\delta}(x)\right), \quad \text{where } S_{\epsilon,\delta}(x) = \sinh\left(\epsilon + \delta \sinh^{-1}(x)\right), \text{and } C_{\epsilon,\delta}(x) = \sqrt{1 + S^2_{\epsilon,\delta}(x)}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", fisher_f(mu, sigma).pdf(x))
6.356352346256452561561561561456 1356E-20
```

dist_sasnormal.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a sinh-arcsinh normal distribution distribution:

$$\text{cdf}_X(x) = \Phi\left(S_{\epsilon,\delta}(x)\right), \quad \text{where } S_{\epsilon,\delta}(x) = \sinh\left(\epsilon + \delta \sinh^{-1}(x)\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", fisher_f(mu, sigma).pdf(x))
6.356352346256452561561561561456 1356E-20
```

dist_sasnormal.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function (sf) of a random variable X, following a sinh-arcsinh normal distribution distribution:

$$\text{sf}_X(x) = 1 - \Phi\left(S_{\epsilon,\delta}(x)\right), \quad \text{where } S_{\epsilon,\delta}(x) = \sinh\left(\epsilon + \delta \sinh^{-1}(x)\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", fisher_f(mu, sigma).pdf(x))
sf: 6.356352346256452561561561561456 1356E-20
```

dist_sasnormal.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following a sinh-arcsinh normal distribution distribution:

$$\text{qtf}_X(q) = S_{-\epsilon/\delta,1/\delta}\left(\Phi^{-1}(q)\right), \quad \text{where } S_{\epsilon,\delta}(x) = \sinh\left(\epsilon + \delta \sinh^{-1}(x)\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", fisher_f(mu, sigma).qtf(q))
qtf: 6.356352346256452561561561561356E+00
```

dist_sasnormal.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following a sinh-arcsinh normal distribution distribution:

$$\text{isf}_X(q) = S_{-\epsilon/\delta,1/\delta}\left(\Phi^{-1}(1-q)\right), \quad \text{where } S_{\epsilon,\delta}(x) = \sinh\left(\epsilon + \delta \sinh^{-1}(x)\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.356352346256452561561561561356E+00
```

dist_sasnormal.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following a sinh-arcsinh normal distribution distribution:

$$C_X(t) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", fisher_f(mu, sigma).c_x(t))
6.356352346256452561561561561356E+00
```

dist_sasnormal.**m_x**(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following a sinh-arcsinh normal distribution distribution:

$$M_X(t) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", fisher_f(mu, sigma).c_x(t))
6.356352346256452561561561561356E+00
```

dist_sasnormal.**k_x**(t, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following a sinh-arcsinh normal distribution distribution:

$$K_X(t) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", fisher_f(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_sasnormal.**moments**(k)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following a sinh-arcsinh normal distribution distribution. All moments exist and are given by

$$\mu'_X(r) = \frac{1}{2^r} \sum_{j=0}^{r} (-1)^j \exp\left((r-2j)(\epsilon/\delta)\right) P_{(r-2j)/\delta}, \quad \text{where } P_q = \frac{e^{1/4}}{\sqrt{8\pi}} \left(K_{(q+1)/2}(1/4) + K_{(q-1)/2}(1/4)\right)$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", fisher_f(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_sasnormal.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following a sinh-arcsinh normal distribution distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", fisher_f(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

4.6.16 Truncated normal distribution

class ctx.**dist_truncated_normal**(*n1*, *n2*, *lambda*, ***kwargs*)

These functions return PDF, CDF, and ICDF of the truncated normal distribution with location a, scale $b > 0$, and the support interval $(-\infty, +\infty)$:

See also: Wikipedia [1214], Orjebin [450], Burkardt [164],

John Burkardt: The Truncated Normal Distribution (has closed form qtf)

dist_truncated_normal.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following an truncated normal distribution:

$$\mathrm{pdf}_X(x) = f(x;\mu,\sigma,a,b) = \frac{1}{\sigma}\frac{\phi(\frac{x-\mu}{\sigma})}{\Phi\left(\frac{b-\mu}{\sigma}\right) - \Phi\left(\frac{a-\mu}{\sigma}\right)}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", dist_truncated_normal(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_truncated_normal.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following an truncated normal distribution:

$$\mathrm{cdf}_X(x) = \frac{\Phi(\xi) - \Phi(\alpha)}{\Phi(\beta) - \Phi(\alpha)}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", dist_truncated_normal(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_truncated_normal.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function function (sf) of a random variable X, following an truncated normal distribution:

$$\mathrm{sf}_X(x) = 1 - \frac{\Phi(\xi) - \Phi(\alpha)}{\Phi(\beta) - \Phi(\alpha)}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", dist_truncated_normal(mu, sigma).pdf(x))
sf: 6.3563523462564525615615615614561356E-20
```

dist_truncated_normal.**qtf**(q)

Returns $\mathrm{qtf}_X(x)$, the quantile function function (qtf) of a random variable X, following an truncated normal distribution:

$$\mathrm{qtf}_X(q) = ??$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", dist_truncated_normal(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_truncated_normal.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function function (isf) of a random variable X, following an truncated normal distribution:

$$\text{isf}_X(q) = ??$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", dist_truncated_normal(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_truncated_normal.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following an truncated normal distribution:

$$C_X(t) = e^{\mu it - \sigma^2 t^2/2} \cdot \frac{\Phi(\beta - \sigma it) - \Phi(\alpha - \sigma it)}{\Phi(\beta) - \Phi(\alpha)}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", dist_truncated_normal(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_truncated_normal.**m_x**(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following an truncated normal distribution:

$$M_X(t) = e^{\mu t + \sigma^2 t^2/2} \cdot \frac{\Phi(\beta - \sigma t) - \Phi(\alpha - \sigma t)}{\Phi(\beta) - \Phi(\alpha)}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("m_x: ", dist_truncated_normal(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_truncated_normal.**k_x**(t, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following an truncated normal distribution:

$$K_X(t) = \log(M_X(t))$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", dist_truncated_normal(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

dist_truncated_normal.**moments**(k)

Returns the first j central moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following an truncated normal distribution. The moments are calculated from their definition:

$$\mu'_X(r) = E(X^r) = \int_0^1 x^r \text{pdf}_X(x) \text{d}x$$

A recursive formula for μ_k (based on $\mu_{-1} = 0$ and $\mu_0 = 1$) is:

$$\mu'_X(r) = m_k = (k-1)\sigma^2 m_{k-2} + \mu m_{k-1} - \sigma \frac{b^{k-1}\phi\left(\frac{b-\mu}{\sigma}\right) - a^{k-1}\phi\left(\frac{a-\mu}{\sigma}\right)}{\Phi\left(\frac{b-\mu}{\sigma}\right) - \Phi\left(\frac{a-\mu}{\sigma}\right)}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", dist_truncated_normal(mu, sigma).moments(k))
6.35635234625645256156156145613356E+00
```

dist_truncated_normal.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following an truncated normal distribution. The cumulants are calculated from the moments.

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", dist_truncated_normal(mu, sigma).cumulants(k))
6.35635234625645256156156145613356E+00
```

4.7 Closed form distributions, based on the incomplete gamma function

4.7.1 !!!Boost: Chi Distribution

The following functions return the pdf, cdf, qtf or boost class of the chi distribution with $n > 0$ degrees of freedom and the support interval $(0, +\infty)$.

See also Wikipedia [1170], MathWorld [814], Ehrhardt [295] (3.9.5)

`math53.chi_pdf(`n, x`)`

Returns pdf(x), the value of the probability density function (*Pdf*) of the chi distribution:

$$\text{pdf}(x) = 2x \times f_{\chi^2}\left(x^2, n\right).$$

Here $f_{\chi^2}(x, n)$ denotes the probability density function of a random variable following an chi-squared distribution with n degress of freedom.

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("ChiPdf(x, a, b): ", ChiPdf(x, a, b))
>>> print ("dist_chi(a, b).pdf(x): ", dist_chi(a, b).pdf(x))
6.356352346256452561561561561456 1356E+00
```

`math53.chi_cdf(`n, x`)`

Returns cdf(x), the value of the cumulative distribution function (*Cdf*) of the chi distribution:

$$\text{cdf}(x) = P(n/2, x^2/2).$$

Here $P(\cdot)$ denotes the lower regularized incomplete gamma function (*RealGammaP*).

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("ChiCdf(x, a, b): ", ChiCdf(x, a, b))
>>> print ("dist_chi(a, b).cdf(x): ", dist_chi(a, b).cdf(x))
6.356352346256452561561561561456 1356E+00
```

`math53.chi_qtf(`n, q`)`

Returns qtf(q), the value of the quantile function (*Qtf*) of the chi distribution:

$$\text{qtf}(q) = \sqrt{2P^{-1}(n/2, q)}.$$

Here $P^{-1}(\cdot)$ denotes the inverse of the lower regularized incomplete gamma function (*RealGammaPInv*).

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("ChiQtf(q, a, b): ", ChiQtf(q, a, b))
>>> print ("dist_chi(a, b).qtf(q): ", dist_chi(a, b).qtf(q))
6.356352346256452561561561561456 1356E+00
```

class ctx.**dist_chi**(n)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The chi distribution is a continuous probability distribution with $n > 0$ degrees of freedom and the support interval $(0, +\infty)$. See also Wikipedia [1170], MathWorld [814], Witkovský [1477].

dist_chi.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following an chi distribution:

$$\text{pdf}_X(x) = 2x \times f_{\chi^2}\left(x^2, n\right).$$

Here $f_{\chi^2}(x, n)$ denotes the probability density function of a random variable following an chi-squared distribution with n degress of freedom.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", chi(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_chi.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following an chi distribution:

$$\text{cdf}_X(x) = P(n/2, x^2/2).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", chi(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_chi.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function (sf) of a random variable X, following an chi distribution:

$$\text{sf}_X(x) = Q(n/2, x^2/2).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", chi(mu, sigma).pdf(x))
sf: 6.35635234625645256156156145613 56E-20
```

dist_chi.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following an chi distribution:

$$\text{qtf}_X(q) = \sqrt{2P^{-1}(n/2, q)}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", chi(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_chi.**isf**(*q*)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following an chi distribution:

$$\text{isf}_X(q) = \sqrt{2Q^{-1}(n/2, q)}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", chi(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_chi.**c_x**(*t*)

Returns $C_X(t)$, the characteristic function of a random variable X, following an chi distribution:

$$C_X(t) = M\left(\frac{k}{2}, \frac{1}{2}, \frac{-t^2}{2}\right) + it\sqrt{2}\frac{\Gamma\left((k+1)/2\right)}{\Gamma(k/2)} M\left(\frac{k+1}{2}, \frac{3}{2}, \frac{-t^2}{2}\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_chi.**m_x**(*t*)

Returns $M_X(t)$, the moment generating function of a random variable X, following an chi distribution:

$$M_X(t) = M\left(\frac{k}{2}, \frac{1}{2}, \frac{t^2}{2}\right) + t\sqrt{2}\frac{\Gamma\left((k+1)/2\right)}{\Gamma(k/2)} M\left(\frac{k+1}{2}, \frac{3}{2}, \frac{t^2}{2}\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("m_x: ", chi(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_chi.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following an chi distribution:

$$K_X(t) = \log\left[M\left(\frac{k}{2}, \frac{1}{2}, \frac{t^2}{2}\right) + t\sqrt{2}\frac{\Gamma\left((k+1)/2\right)}{\Gamma(k/2)} M\left(\frac{k+1}{2}, \frac{3}{2}, \frac{t^2}{2}\right)\right].$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", chi(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

dist_chi.**moments**(k)

Returns the first j central moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following an chi distribution (Wikipedia). The raw moments are calculated from the central moments.

$$\mu_X(j) = 2^{2j} \frac{\Gamma\left((k+j)/2\right)}{\Gamma(k/2)}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", chi(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_chi.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following an chi distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", chi(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

4.7.2 Boost: Chi2 distribution

The following functions return the pdf, cdf, qtf or boost class of the chi-squared distribution with $n > 0$ degrees of freedom and the support interval $(0, +\infty)$.

See also Wikipedia [1143], MathWorld [792], BoostMath [53], Ehrhardt [295] (3.9.6)

`math53.chi2_pdf(`n, x`)`

Returns pdf(x), the value of the probability density function (*Pdf*) of the chi-squared distribution:

$$\text{pdf}(x) = f_{\chi^2}(x, n) = \frac{1}{2^{n/2}\Gamma(n/2)} x^{(n-2)/2} e^{-x/2}.$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("ChiSquaredPdf(x, a, b): ", ChiSquaredPdf(x, a, b))
>>> print ("dist_chi_squared(a, b).pdf(x): ", dist_chi_squared(a, b).pdf(x))
6.35635234625645256156156145613 56E+00
```

`math53.chi2_cdf(`n, x`)`

Returns cdf(x), the value of the cumulative distribution function (*Cdf*) of the chi-squared distribution:

$$\text{cdf}(x) = F_{\chi^2}(x, n) = P(n/2, x/2).$$

Here $P(\cdot)$ denotes the lower regularized incomplete gamma function (*RealGammaP*).

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("ChiSquaredCdf(x, a, b): ", ChiSquaredCdf(x, a, b))
>>> print ("dist_chi_squared(a, b).cdf(x): ", dist_chi_squared(a, b).cdf(x))
6.35635234625645256156156145613 56E+00
```

`math53.chi2_qtf(`n, q`)`

Returns qtf(q), the value of the quantile function (*Qtf*) of the chi-squared distribution:

$$\text{qtf}(q) = 2P^{-1}(n/2, q).$$

Here $P^{-1}(\cdot)$ denotes the inverse of the lower regularized incomplete gamma function (*RealGammaPInv*).

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("ChiSquaredQtf(q, a, b): ", ChiSquaredQtf(q, a, b))
>>> print ("dist_chi_squared(a, b).qtf(q): ", dist_chi_squared(a, b).qtf(q))
6.35635234625645256156156145613 56E+00
```

class `ctx.dist_chi2(`n`)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

The chi-squared distribution is a continuous probability distribution with $n > 0$ degrees of freedom and the support interval $(0, +\infty)$. See also Wikipedia [1143], MathWorld [792], BoostMath [53], Witkovský [1457], R (Statistical System) [519].

dist_chi_squared.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a chi-squared distribution:

$$\text{pdf}_X(x) = f_{\chi^2}(n, x) = \frac{1}{2^{n/2}\Gamma(n/2)} x^{(n-2)/2} e^{-x/2}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", chi_squared(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_chi_squared.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a chi-squared distribution:

$$\text{cdf}_X(x) = F_{\chi^2}(x, n) = P(n/2, x/2).$$

Here $P(\cdot)$ and $P^{-1}(\cdot)$ are the regularized gamma function and its functional inverse, respectively.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", chi_squared(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_chi_squared.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function (sf) of a random variable X, following a chi-squared distribution:

$$\text{sf}_X(x) = 1 - F_{\chi^2}(x, n) = Q(n/2, x/2).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", chi_squared(mu, sigma).pdf(x))
sf: 6.3563523462564525615615615614561356E-20
```

dist_chi_squared.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following a chi-squared distribution:

$$\text{qtf}_X(q) = 2P^{-1}(n/2, q).$$

Here $P(\cdot)$ and $P^{-1}(\cdot)$ are the regularized gamma function and its functional inverse, respectively.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", chi_squared(mu, sigma).qtf(q))
qtf: 6.3563523462564525615615615614561356E+00
```

dist_chi_squared.**isf**(*q*)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following a chi-squared distribution:

$$\text{isf}_X(q) = 2Q^{-1}(n/2, q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", chi_squared(mu, sigma).isf(q))
6.3563523462564525615615615614561356E+00
```

dist_chi_squared.**c_x**(*t*)

Returns $C_X(t)$, the characteristic function of a random variable X, following a chi-squared distribution:

$$C_X(t) = (1 - 2it)^{-n/2}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.3563523462564525615615615614561356E+00
```

dist_chi_squared.**m_x**(*t*)

Returns $M_X(t)$, the moment generating function of a random variable X, following a chi-squared distribution:

$$M_X(t) = (1 - 2t)^{-n/2}, \quad t \in \left(-\infty, \tfrac{1}{2}\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.3563523462564525615615615614561356E+00
```

dist_chi_squared.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function, and its j^{th} derivatives, $K_X^{(j)}(t), j = 1 \ldots k$, of a random variable X, following a chi-squared distribution:

$$K_X(t) = -\frac{n}{2}\log(1 - 2t), \quad t \in \left(-\infty, \tfrac{1}{2}\right),$$

$$K_X^{(j)}(t) = \frac{2^{j-1}(j-1)!}{(1-2t)^j}n.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", chi_squared(mu, sigma).k_x(t, k))
6.3563523462564525615615615614561356E+00
```

dist_chi_squared.**moments**(k)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following a chi-squared distribution: the moments are calculated from the cumulants.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", chi_squared(mu, sigma).moments(k))
6.35635234625645256156156145614561356E+00
```

dist_chi_squared.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following a chi-squared distribution:

$$\kappa_{r+1} = 2^r r! n.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", chi_squared(mu, sigma).cumulants(k))
6.35635234625645256156156145614561356E+00
```

Recurrences: Central Chi-square

ctx.**chi_squared_recurrence**(x, n, *lambda*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The following recurrence relations hold for the pdf and CDF:

$$f_{\chi^2}(n+2, x) = \frac{x}{n} f_{\chi^2}(n, x)$$

$$F_{\chi^2}(n, x) - F_{\chi^2}(n+2, x) = 2 f_{\chi^2}(n+2, x)$$

Approximations

ctx.**chi_squared_gp**(x, n, *results='cdf'*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

Calculates the pdf, cdf and sf from the characteristic function using the procedure of Gil-Pelaez (see *gil_pelaez_pdf()* and *gil_pelaez_cdf()*).

ctx.**chi_squared_ecf**(x, f, *results='cdf'*)

where ctx is ipm, dec, mpm, or gmp.

Calculates the Edgeworth approximation to the pdf, cdf and sf.

ctx.**chi_squared_ecf_inv**(q, f, *results='qtf'*)

where ctx is ipm, dec, mpm, or gmp.

Calculates the Cornish-Fisher approximation to the qtf and isf.

ctx.**chi_squared_spa**(x, n, *results='c'*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

Calculates the Luggannini-Rice saddlepoint approximation of the pdf, cdf and sf.

The solution $\hat{s}(x)$ of the saddlepoint equation $K_X^{(1)}(\hat{s}(x)) = x$, of a random variable X, following a non-central chi-squared distribution is given by:

$$\hat{s}(x) = -\frac{1}{4x}\left[n - 2x + n\right], \quad x > 0$$

ctx.**chi_squared_spa_inv**(*x*, *n*, *results='qtf'*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

Calculates the inverse Jensen saddlepoint approximation of the qtf and isf.

4.7.3 Boost: Gamma (Pearson Type III, Erlang) distribution

The following functions return the pdf, cdf, qtf or boost class of the gamma distribution with shape $a > 0$, scale $b > 0$, and the support interval $(0, +\infty)$.

See also Wikipedia [1147], MathWorld [816], BoostMath [57], Ehrhardt [295] (3.9.10).

`math53.gamma_pdf`(a, b, x)

Returns pdf(x), the value of the probability density function (*Pdf*) of the gamma distribution:

$$\text{pdf}(x) = \frac{x^{a-1}e^{-x/b}}{\Gamma(a)b^a}.$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("GammaPdf(x, a, b): ", GammaPdf(x, a, b))
>>> print ("dist_gamma(a, b).pdf(x): ", dist_gamma(a, b).pdf(x))
6.35635234625645256156156145613 56E+00
```

`math53.gamma_cdf`(a, b, x)

Returns cdf(x), the value of the cumulative distribution function (*Cdf*) of the gamma distribution:

$$\text{cdf}(x) = P(a, x/b).$$

Here $P(\cdot)$ denotes the lower regularized incomplete gamma function (*RealGammaP*).

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("GammaCdf(x, a, b): ", GammaCdf(x, a, b))
>>> print ("dist_gamma(a, b).cdf(x): ", dist_gamma(a, b).cdf(x))
6.35635234625645256156156145613 56E+00
```

`math53.gamma_qtf`(a, b, q)

Returns qtf(q), the value of the quantile function (*Qtf*) of the gamma distribution:

$$\text{qtf}(q) = b \cdot P^{-1}(a, q).$$

Here $P^{-1}(\cdot)$ denotes the inverse of the lower regularized incomplete gamma function (*RealGammaPInv*).

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("GammaQtf(q, a, b): ", GammaQtf(q, a, b))
>>> print ("dist_gamma(a, b).qtf(q): ", dist_gamma(a, b).qtf(q))
6.35635234625645256156156145613 56E+00
```

class ctx.**dist_gamma**(a, b)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The gamma distribution is a continuous probability distribution with shape $a > 0$, scale $b > 0$, and the support interval $(0, +\infty)$. See also Wikipedia [1147], MathWorld [816], BoostMath [57], Witkovský [1460], R (Statistical System) [522].

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.gdtr.html#scipy.special.gdtr

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.gdtrc.html#scipy.special.gdtrc

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.gdtrib.html#scipy.special.gdtrib

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.gdtrix.html#scipy.special.gdtrix

dist_gamma.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a gamma distribution:

$$\text{pdf}_X(x) = \frac{x^{a-1}e^{-x/b}}{\Gamma(a)b^a}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", gamma(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_gamma.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a gamma distribution:

$$\text{cdf}_X(x) = P(a, x/b).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", gamma(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_gamma.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function (sf) of a random variable X, following a gamma distribution:

$$\text{sf}_X(x) = Q(a, x/b).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", gamma(mu, sigma).pdf(x))
sf: 6.35635234625645256156156145613 56E-20
```

dist_gamma.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following a gamma distribution:

$$\text{qtf}_X(q) = b \cdot P^{-1}(a, q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", gamma(mu, sigma).qtf(q))
qtf: 6.356352346256452561561561561456 1356E+00
```

`dist_gamma.isf(q)`

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following a gamma distribution:

$$\text{isf}_X(q) = b \cdot Q^{-1}(a, q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", gamma(mu, sigma).isf(q))
6.356352346256452561561561561456 1356E+00
```

`dist_gamma.c_x(t)`

Returns $C_X(t)$, the characteristic function of a random variable X, following a gamma distribution:

$$C_X(t) = \left(\frac{b^{-1}}{(b^{-1} - it)} \right)^a.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", gamma(mu, sigma).c_x(t))
6.356352346256452561561561561456 1356E+00
```

`dist_gamma.m_x(t)`

Returns $M_X(t)$, the moment generating function of a random variable X, following a gamma distribution:

$$M_X(t) = \left(\frac{b^{-1}}{(b^{-1} - t)} \right)^a.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("m_x: ", gamma(mu, sigma).c_x(t))
6.356352346256452561561561561456 1356E+00
```

`dist_gamma.k_x(t, k=0)`

Returns $K_X(t)$, the cumulant generating function of a random variable X, following a gamma distribution:

$$K_X(t) = a \log \left(\frac{b^{-1}}{(b^{-1} - t)} \right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", gamma(mu, sigma).k_x(t, k))
6.356352346256452561561561561456 1356E+00
```

dist_gamma.**moments**(k)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following an exponential distribution. The rth moments only exists for $n_2 > 2r$.

$$\mu'_X(r) = b^r \frac{\Gamma(a+r)}{\Gamma(a)}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", gamma(mu, sigma).moments(k))
6.356352346256452561561561561456 1356E+00
```

dist_gamma.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following an exponential distribution. The cumulants are calculated from the moments.

$$\kappa'_X(r) = a \cdot b \cdot \Gamma(r).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", gamma(mu, sigma).cumulants(k))
6.356352346256452561561561561456 1356E+00
```

4.7.4 Boost: Inverse chisquared distribution

Returns the pdf, cdf, qtf or boost class of a random variable X, following an inverse chi-squared distribution with shape $a > 0$, scale $b > 0$, and the support interval $(0, +\infty)$.

See also Wikipedia [1151], BoostMath [58], Witkovský [1452].

`math53.inverse_chi2_pdf`(a, b, x)

Returns pdf(x), the value of the probability density function (*Pdf*) of the inverse chis-quared distribution:

$$\text{pdf}(x) = \left(\frac{b}{x}\right)^a \frac{e^{-\frac{b}{x}}}{x\Gamma(a)}.$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("InvchisquaredPdf(x, a, b): ", InvchisquaredPdf(x, a, b))
>>> print ("dist_invchisquared(a, b).pdf(x): ", dist_invchisquared(a, b).pdf(x))
6.35635234625645256156156145613 56E+00
```

`math53.inverse_chi2_cdf`(a, b, x)

Returns cdf(x), the value of the cumulative distribution function (*Cdf*) of the inverse chis-quared distribution:

$$\text{cdf}(x) = Q\left(a, -\frac{b}{x}\right).$$

Here $Q(\cdot)$ denotes the upper regularized incomplete gamma function (*RealGammaQ*).

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("InvchisquaredCdf(x, a, b): ", InvchisquaredCdf(x, a, b))
>>> print ("dist_invchisquared(a, b).cdf(x): ", dist_invchisquared(a, b).cdf(x))
6.35635234625645256156156145613 56E+00
```

`math53.inverse_chi2_qtf`(a, b, q)

Returns qtf(q), the value of the quantile function (*Qtf*) of the inverse chis-quared distribution:

$$\text{qtf}(q) = \frac{b}{Q^{-1}(a, q)}.$$

Here $Q^{-1}(\cdot)$ denotes the inverse of the upper regularized incomplete gamma function (*RealGammaQInv*).

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("InvchisquaredQtf(q, a, b): ", InvchisquaredQtf(q, a, b))
>>> print ("dist_invchisquared(a, b).qtf(q): ", dist_invchisquared(a, b).qtf(q))
6.35635234625645256156156145613 56E+00
```

class ctx.**dist_inverse_chi2**(a, b)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The inverse chisquared distribution is a continuous probability distribution with shape $a > 0$, scale $b > 0$, and the support interval $(0, +\infty)$. See also Wikipedia [1175], MathWorld [251], BoostMath [82].

dist_invchisquared.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following an inverse chisquared distribution:

$$\text{pdf}_X(x) = \left(\frac{b}{x}\right)^a \frac{e^{-\frac{b}{x}}}{x\Gamma(a)}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", mp_invchisquared(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_invchisquared.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following an inverse chisquared distribution:

$$\text{cdf}_X(x) = Q\left(a, -\frac{b}{x}\right).$$

where $Q(\cdot)$ and $Q^{-1}(\cdot)$ denote the regularized gamma function and its functional inverse.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", mp_invchisquared(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_invchisquared.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function function (sf) of a random variable X, following an inverse chisquared distribution:

$$\text{sf}_X(x) = P\left(a, -\frac{b}{x}\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", mp_invchisquared(mu, sigma).pdf(x))
sf: 6.3563523462564525615615615614561356E-20
```

dist_invchisquared.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function function (qtf) of a random variable X, following an inverse chisquared distribution:

$$\text{qtf}_X(q) = \frac{b}{Q^{-1}(a, q)}.$$

where $Q(\cdot)$ and $Q^{-1}(\cdot)$ denote the regularized gamma function and its functional inverse.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", mp_invchisquared(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_invchisquared.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function function (isf) of a random variable X, following an inverse chisquared distribution:

$$\text{isf}_X(q) = \frac{b}{P^{-1}(a, q)}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", mp_invchisquared(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_invchisquared.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following an inverse chisquared distribution:

$$C_X(t) = \frac{2(-i\beta t)^{\alpha/2}}{\Gamma(\alpha)} K_\alpha(\sqrt{-4i\beta t}),$$

where $K_n(\cdot)$ denotes the modified Bessel function of the second kind.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", mp_invchisquared(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_invchisquared.**m_x**(t)

The moment generating function does not exist.

dist_invchisquared.**k_x**(t, *k=0*)

The cumulant generating function does not exist.

dist_invchisquared.**moments**(k)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following an inverse chisquared distribution. The rth moments only exists for $\alpha > r$.

$$\mu'_X(r) = \frac{\beta^n}{(\alpha - 1) \cdots (\alpha - n)}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", mp_invchisquared(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_invchisquared.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following an inverse chisquared distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", mp_invchisquared(mu, sigma).cumulants(k))
6.35635234625645256156156145561356E+00
```

4.7.5 Boost: Inverse Gamma (Pearson Type V) distribution

Returns the pdf, cdf, qtf or boost class of a random variable X, following an inverse gamma distribution with shape $a > 0$, scale $b > 0$, and the support interval $(0, +\infty)$.

See also Wikipedia [1151], BoostMath [58], Witkovský [1452], Ehrhardt [295] (3.9.12).

`math53.inverse_gamma_pdf`(a, b, x)

Returns pdf(x), the value of the probability density function (*Pdf*) of the inverse gamma distribution:

$$\text{pdf}(x) = \left(\frac{b}{x}\right)^a \frac{e^{-\frac{b}{x}}}{x\Gamma(a)}.$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("InvgammaPdf(x, a, b): ", InvgammaPdf(x, a, b))
>>> print ("dist_invgamma(a, b).pdf(x): ", dist_invgamma(a, b).pdf(x))
6.35635234625645256156156145613 56E+00
```

`math53.inverse_gamma_cdf`(a, b, x)

Returns cdf(x), the value of the cumulative distribution function (*Cdf*) of the inverse gamma distribution:

$$\text{cdf}(x) = Q\left(a, -\frac{b}{x}\right).$$

Here $Q(\cdot)$ denotes the upper regularized incomplete gamma function (*RealGammaQ*).

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("InvgammaCdf(x, a, b): ", InvgammaCdf(x, a, b))
>>> print ("dist_invgamma(a, b).cdf(x): ", dist_invgamma(a, b).cdf(x))
6.35635234625645256156156145613 56E+00
```

`math53.inverse_gamma_qtf`(a, b, q)

Returns qtf(q), the value of the quantile function (*Qtf*) of the inverse gamma distribution:

$$\text{qtf}(q) = \frac{b}{Q^{-1}(a, q)}.$$

Here $Q^{-1}(\cdot)$ denotes the inverse of the upper regularized incomplete gamma function (*RealGammaQInv*).

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("InvgammaQtf(q, a, b): ", InvgammaQtf(q, a, b))
>>> print ("dist_invgamma(a, b).qtf(q): ", dist_invgamma(a, b).qtf(q))
6.35635234625645256156156145613 56E+00
```

class ctx.**dist_inverse_gamma**(a, b)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The inverse gamma distribution is a continuous probability distribution with shape $a > 0$, scale $b > 0$, and the support interval $(0, +\infty)$. See also Wikipedia [1151], MathWorld [244], BoostMath [58], Witkovský [1462], Witkovský [1452].

dist_invgamma.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following an inverse gamma distribution:

$$\text{pdf}_X(x) = \left(\frac{b}{x}\right)^a \frac{e^{-\frac{b}{x}}}{x\Gamma(a)}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", invgamma(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_invgamma.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following an inverse gamma distribution:

$$\text{cdf}_X(x) = Q\left(a, -\frac{b}{x}\right).$$

where $Q(\cdot)$ and $Q^{-1}(\cdot)$ denote the regularized gamma function and its functional inverse.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", invgamma(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_invgamma.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function (sf) of a random variable X, following an inverse gamma distribution:

$$\text{sf}_X(x) = P\left(a, -\frac{b}{x}\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", invgamma(mu, sigma).pdf(x))
sf: 6.35635234625645256156156145613 56E-20
```

dist_invgamma.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following an inverse gamma distribution:

$$\text{qtf}_X(q) = \frac{b}{Q^{-1}(a, q)}.$$

where $Q(\cdot)$ and $Q^{-1}(\cdot)$ denote the regularized gamma function and its functional inverse.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", invgamma(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_invgamma.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following an inverse gamma distribution:

$$\text{isf}_X(q) = \frac{b}{P^{-1}(a, q)}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", invgamma(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_invgamma.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following an inverse gamma distribution:

$$C_X(t) = \frac{2(-i\beta t)^{\alpha/2}}{\Gamma(\alpha)} K_\alpha(\sqrt{-4i\beta t}),$$

where $K_n(\cdot)$ denotes the modified Bessel function of the second kind.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", invgamma(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_invgamma.**m_x**(t)

The moment generating function does not exist.

dist_invgamma.**k_x**(t, *k=0*)

The cumulant generating function does not exist.

dist_invgamma.**moments**(k)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following an inverse gamma distribution. The rth moments only exists for $\alpha > r$.

$$\mu'_X(r) = \frac{\beta^n}{(\alpha - 1) \cdots (\alpha - n)}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", invgamma(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_invgamma.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following an inverse gamma distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", invgamma(mu, sigma).cumulants(k))
6.356352346256452561561561561456 1356E+00
```

4.7.6 !!!Boost: Maxwell Distribution

Returns the pdf, cdf, qtf or boost class of a random variable X, following a Maxwell distribution with scale $b > 0$, and the support interval $(0, +\infty)$.

See also Wikipedia [1181], MathWorld [827], Ehrhardt [295] (3.9.20).

math53.**maxwell_pdf**(b, x)

Returns pdf(x), the value of the probability density function (*Pdf*) of the Maxwell distribution:

$$\text{pdf}(x) = \sqrt{\frac{2}{\pi}} \frac{x^2}{b^3} \exp\left(-\frac{x^2}{2b^2}\right).$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("MaxwellPdf(x, a, b): ", MaxwellPdf(x, a, b))
>>> print ("dist_maxwell(a, b).pdf(x): ", dist_maxwell(a, b).pdf(x))
6.35635234625645256156156145613 56E+00
```

math53.**maxwell_cdf**(b, x)

Returns cdf(x), the value of the cumulative distribution function (*Cdf*) of the Maxwell distribution:

$$\text{cdf}(x) = P\left(\frac{3}{2}, \frac{x^2}{2b^2}\right).$$

Here $P(\cdot)$ denotes the lower regularized incomplete gamma function (*RealGammaP*).

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("MaxwellCdf(x, a, b): ", MaxwellCdf(x, a, b))
>>> print ("dist_maxwell(a, b).cdf(x): ", dist_maxwell(a, b).cdf(x))
6.35635234625645256156156145613 56E+00
```

math53.**maxwell_qtf**(b, q)

Returns qtf(q), the value of the quantile function (*Qtf*) of the Maxwell distribution:

$$\text{qtf}(q) = b\sqrt{2P^{-1}\left(\frac{3}{2}, q\right)}.$$

Here $P^{-1}(\cdot)$ denotes the inverse of the lower regularized incomplete gamma function (*RealGammaPInv*).

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("MaxwellQtf(q, a, b): ", MaxwellQtf(q, a, b))
>>> print ("dist_maxwell(a, b).qtf(q): ", dist_maxwell(a, b).qtf(q))
6.35635234625645256156156145613 56E+00
```

class ctx.**dist_maxwell**(b)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The Maxwell distribution is a continuous probability distribution with scale $b > 0$, and the support interval $(0, +\infty)$. See also Wikipedia [1181], MathWorld [827], Witkovský [1480].

dist_maxwell.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following an Maxwell distribution:

$$\text{pdf}_X(x) = \sqrt{\frac{2}{\pi}} \frac{x^2}{b^3} \exp\left(-\frac{x^2}{2b^2}\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", maxwell(mu, sigma).pdf(x))
6.356352346256452561561561561456135 6E-20
```

dist_maxwell.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following an Maxwell distribution:

$$\text{cdf}_X(x) = P\left(\frac{3}{2}, \frac{x^2}{2b^2}\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", maxwell(mu, sigma).pdf(x))
6.356352346256452561561561561456135 6E-20
```

dist_maxwell.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function (sf) of a random variable X, following an Maxwell distribution:

$$\text{sf}_X(x) = Q\left(\frac{3}{2}, \frac{x^2}{2b^2}\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", maxwell(mu, sigma).pdf(x))
sf: 6.356352346256452561561561561456135 6E-20
```

dist_maxwell.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following an Maxwell distribution:

$$\text{qtf}_X(q) = b\sqrt{2P^{-1}\left(\frac{3}{2}, q\right)}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", maxwell(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145614561356E+00
```

dist_maxwell.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following an Maxwell distribution:

$$\text{isf}_X(q) = b\sqrt{2Q^{-1}\left(\frac{3}{2}, q\right)}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", maxwell(mu, sigma).isf(q))
6.35635234625645256156156145614561356E+00
```

dist_maxwell.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following an Maxwell distribution:

$$C_X(t) = M\left(\frac{3}{2}, \frac{1}{2}\frac{-t^2}{2}\right) + \frac{2\sqrt{2}\,it}{\sqrt{\pi}} M\left(2, \frac{3}{2}, \frac{-t^2}{2}\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", maxwell(mu, sigma).c_x(t))
6.35635234625645256156156145614561356E+00
```

dist_maxwell.**m_x**(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following an Maxwell distribution:

$$M_X(t) = M\left(\frac{3}{2}, \frac{1}{2}\frac{t^2}{2}\right) + \frac{2\sqrt{2}\,t}{\sqrt{\pi}} M\left(2, \frac{3}{2}, \frac{t^2}{2}\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("m_x: ", maxwell(mu, sigma).c_x(t))
6.35635234625645256156156145614561356E+00
```

dist_maxwell.**k_x**(t, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following an Maxwell distribution:

$$K_X(t) = \log\left[M\left(\frac{3}{2}, \frac{1}{2}\frac{t^2}{2}\right) + \frac{2\sqrt{2}\,t}{\sqrt{\pi}} M\left(2, \frac{3}{2}, \frac{t^2}{2}\right)\right].$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", maxwell(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

dist_maxwell.**moments**(k)

Returns the first j central moments, $\mu_j, j = 1 \dots k$, of a random variable X, following an Maxwell distribution (Wikipedia). The raw moments are calculated from the central moments.

$$\mu_X(r) = \begin{cases} \sqrt{\frac{2}{\pi}} k! \alpha^{2k-1} & \text{for } n = 2k-1, \\ (n+1)!! \alpha^n & \text{for } n \text{ even}, \end{cases}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", maxwell(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_maxwell.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \dots k$, of a random variable X, following an Maxwell distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", maxwell(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

4.7.7 !!!Boost: Nakagami distribution

The following functions return the pdf, cdf, qtf or boost class of the Nakagami distribution with shape $m > 0$, scale $\omega > 0$, and the support interval $(0, +\infty)$.

See also Wikipedia [1182], MathWorld [254], Dharmawansa P and Ahmed [241], Hauberg [363], Ehrhardt [295] (3.9.22).

See also: https://reference.wolfram.com/language/ref/NakagamiDistribution.html

See also: https://mathworld.wolfram.com/PochhammerSymbol.html

math53.**nakagami_pdf**(*m*, *omega*, *x*)

Returns pdf(x), the value of the probability density function (*Pdf*) of the Nakagami distribution:

$$\text{pdf}(x) = \frac{2m^m x^{2m-1}}{\omega^m \Gamma(m)} \exp\left(-\frac{m}{\omega}x^2\right).$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("NakagamiPdf(x, a, b): ", NakagamiPdf(x, a, b))
>>> print ("dist_nakagami(a, b).pdf(x): ", dist_nakagami(a, b).pdf(x))
6.35635234625645256156156145613 56E+00
```

math53.**nakagami_cdf**(*m*, *omega*, *x*)

Returns cdf(x), the value of the cumulative distribution function (*Cdf*) of the Nakagami distribution:

$$\text{cdf}(x) = P\left(\frac{m}{\omega}x^2\right).$$

Here $P(\cdot)$ denotes the lower regularized incomplete gamma function (*RealGammaP*).

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("NakagamiCdf(x, a, b): ", NakagamiCdf(x, a, b))
>>> print ("dist_nakagami(a, b).cdf(x): ", dist_nakagami(a, b).cdf(x))
6.35635234625645256156156145613 56E+00
```

math53.**nakagami_qtf**(*m*, *omega*, *q*)

Returns qtf(q), the value of the quantile function (*Qtf*) of the Nakagami distribution:

$$\text{qtf}(q) = \sqrt{\frac{\omega}{m}P^{-1}(m, q)}.$$

Here $P^{-1}(\cdot)$ denotes the inverse of the lower regularized incomplete gamma function (*RealGammaPInv*).

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("NakagamiQtf(q, a, b): ", NakagamiQtf(q, a, b))
>>> print ("dist_nakagami(a, b).qtf(q): ", dist_nakagami(a, b).qtf(q))
6.35635234625645256156156145613 56E+00
```

class ctx.**dist_nakagami**(*m*, *omega*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The Nakagami distribution is a continuous probability distribution with shape $m > 0$, scale $\omega > 0$, and the support interval $(0, +\infty)$. See also Wikipedia [1182], MathWorld [254], Witkovský [1481], Dharmawansa P and Ahmed [241], Hauberg [363].

Dharmawansa 2007: Characteristic function Hauberg 2005: Moments

dist_nakagami.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following an Nakagami distribution:

$$\text{pdf}_X(x) = \frac{2m^m x^{2m-1}}{\omega^m \Gamma(m)} \exp\left(-\frac{m}{\omega}x^2\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", nakagami(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_nakagami.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following an Nakagami distribution:

$$\text{cdf}_X(x) = P\left(\frac{m}{\omega}x^2\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", nakagami(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_nakagami.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function (sf) of a random variable X, following an Nakagami distribution:

$$\text{sf}_X(x) = Q\left(\frac{m}{\omega}x^2\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", nakagami(mu, sigma).pdf(x))
sf: 6.3563523462564525615615615614561356E-20
```

dist_nakagami.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following an Nakagami distribution:

$$\text{qtf}_X(q) = \sqrt{\frac{\omega}{m}P^{-1}(m, q)}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", nakagami(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145614561356E+00
```

dist_nakagami.**isf**(*q*)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following an Nakagami distribution:

$$\text{isf}_X(q) = \sqrt{\frac{\omega}{m} Q^{-1}(m, q)}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", nakagami(mu, sigma).isf(q))
6.35635234625645256156156145614561356E+00
```

dist_nakagami.**c_x**(*t*)

Returns $C_X(t)$, the characteristic function of a random variable X, following an Nakagami distribution:

$$C_X(t) = \frac{\Gamma(2m)}{2^{m-1}\Gamma(m)} \exp\left(-\frac{\omega}{8m}t^2\right) D_{-2m}\left(-it\sqrt{\frac{\omega}{2m}}\right).$$

Dharmawansa 2007: Characteristic function

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", nakagami(mu, sigma).c_x(t))
6.35635234625645256156156145614561356E+00
```

dist_nakagami.**m_x**(*t*)

Returns $M_X(t)$, the moment generating function of a random variable X, following an Nakagami distribution:

$$M_X(t) = \frac{\Gamma(2m)}{2^{m-1}\Gamma(m)} \exp\left(-\frac{\omega}{8m}t^2\right) D_{-2m}\left(-t\sqrt{\frac{\omega}{2m}}\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("m_x: ", nakagami(mu, sigma).c_x(t))
6.35635234625645256156156145614561356E+00
```

dist_nakagami.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following an Nakagami distribution:

$$K_X(t) = \log\left[\frac{\Gamma(2m)}{2^{m-1}\Gamma(m)} \exp\left(-\frac{\omega}{8m}t^2\right) D_{-2m}\left(-t\sqrt{\frac{\omega}{2m}}\right)\right].$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", nakagami(mu, sigma).k_x(t, k))
6.356352346256452561561561456135 6E+00
```

dist_nakagami.**moments**(k)

Returns the first j central moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following an Nakagami distribution (Wikipedia). The raw moments are calculated from the central moments.

$$\mu_X(n) = tbd.$$

Hauberg 2005: Moments

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", nakagami(mu, sigma).moments(k))
6.356352346256452561561561456135 6E+00
```

dist_nakagami.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following an Nakagami distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", nakagami(mu, sigma).cumulants(k))
6.356352346256452561561561456135 6E+00
```

4.7.8 Amoroso distribution

class ctx.**dist_amoroso**(a, b)

where ctx is dec, mpm, ipm, fpm, gmp or arb.

The Amoroso distribution distribution is a continuous probability distribution with parameters $a > 0$ and $b > 0$, and the support interval $(0, +\infty)$.

See also Crooks [188], Crooks [187].

dist_amoroso.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a Amoroso distribution:

$$\text{pdf}_X(x) = \frac{|\beta|}{\Gamma(\alpha)|\theta|}\left(\frac{x-a}{\theta}\right)^{\alpha\beta-1}\exp\left(-\left(\frac{x-a}{\theta}\right)^{\beta}\right)$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", fisher_f(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_amoroso.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a Amoroso distribution:

$$\text{cdf}_X(x) = P(\alpha, z) \quad \text{for } \beta/\theta > 0, \quad \text{where } z = \left(\frac{x-a}{\theta}\right)^{\beta}$$

$$\text{cdf}_X(x) = Q(\alpha, z) \quad \text{for } \beta/\theta < 0, \quad \text{where } z = \left(\frac{x-a}{\theta}\right)^{\beta}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", fisher_f(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_amoroso.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function (sf) of a random variable X, following a Amoroso distribution:

$$\text{sf}_X(x) = Q(\alpha, z) \quad \text{for } \beta/\theta < 0 \quad \text{where } z = \left(\frac{x-a}{\theta}\right)^{\beta}$$

$$\text{sf}_X(x) = P(\alpha, z) \quad \text{for } \beta/\theta > 0, \quad \text{where } z = \left(\frac{x-a}{\theta}\right)^{\beta}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", fisher_f(mu, sigma).pdf(x))
sf: 6.35635234625645256156156145613 56E-20
```

dist_amoroso.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following a Amoroso distribution:

$$\text{qtf}_X(q) = a + \theta \cdot z^{1/\beta}; z = P^{-1}(\alpha, q) \quad \text{for } \beta/\theta > 0$$

$$\text{qtf}_X(q) = a + \theta \cdot z^{1/\beta}; z = Q^{-1}(\alpha, q) \quad \text{for } \beta/\theta < 0$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", fisher_f(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_amoroso.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following a Amoroso distribution:

$$\text{isf}_X(q) = a + \theta \cdot z^{1/\beta}; z = Q^{-1}(\alpha, q) \quad \text{for } \beta/\theta > 0$$

$$\text{isf}_X(q) = a + \theta \cdot z^{1/\beta}; z = P^{-1}(\alpha, q) \quad \text{for } \beta/\theta < 0$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_amoroso.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following a Amoroso distribution:

$$C_X(t) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", fisher_f(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_amoroso.**m_x**(t)

Returns `NaN`, since the moment generating function does not exist.

dist_amoroso.**k_x**(t, *k=0*)

Returns `NaN`, since the cumulant generating function does not exist.

dist_amoroso.**moments**(k)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following a Amoroso distribution. The rth moments only exists for $n_2 > 2r$.

$$\mu'_X(r) = ??$$

Standard moments:

$$\mu'_X(r) = \frac{\Gamma(\alpha + r/\beta)}{\Gamma(\alpha)}, \quad \alpha + r/\beta) > 0$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", fisher_f(mu, sigma).moments(k))
6.35635234625645256156156145613356E+00
```

dist_amoroso.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following a Amoroso distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", fisher_f(mu, sigma).cumulants(k))
6.35635234625645256156156145613356E+00
```

4.7.9 Distribution of the logarithm of a χ^2 random variable

class ctx.**dist_logrv_chisquared**(n)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The distribution of the logarithm of a χ^2 random variable with n degrees of freedom is a continuous probability distribution with the support interval $(-\infty, +\infty)$. See also Witkovský [1457].

dist_logrv_chisquared.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following the distribution of the logarithm of a χ^2 random variable:

$$\mathrm{pdf}_X(x) = e^x f_{\chi^2}\left(e^x, n\right),$$

Here $f_{\chi^2}(\cdot, n)$ denotes the pdf of a random variable following an chi-squared distribution with n degress of freedom.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", logrv_chisquared(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_logrv_chisquared.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following the distribution of the logarithm of a χ^2 random variable:

$$\mathrm{cdf}_X(x) = F_{\chi^2}\left(e^x, n\right) = P(n/2, e^{x/2}),$$

Here $F_{\chi^2}(\cdot, n)$ denotes the cdf of a random variable following an chi-squared distribution with n degress of freedom, and $P(\cdot)$ is the lower regularized gamma function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", logrv_chisquared(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_logrv_chisquared.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following the distribution of the logarithm of a χ^2 random variable:

$$\mathrm{sf}_X(x) = 1 - F_{\chi^2}\left(e^x, n\right) = Q(n/2, e^{x/2}).$$

Here $1 - F_{\chi^2}(\cdot, n)$ denotes the sf of a random variable following an chi-squared distribution with n degress of freedom, and $Q(\cdot)$ is the upper regularized gamma function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", logrv_chisquared(mu, sigma).pdf(x))
sf: 6.35635234625645256156156145613 56E-20
```

dist_logrv_chisquared.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following the distribution of the logarithm of a χ^2 random variable:

$$\text{qtf}_X(q) = \log\left(2P^{-1}(n/2, q)\right).$$

Here $P^{-1}(\cdot)$ denotes the inverse of the lower regularized incomplete gamma function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", logrv_chisquared(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_logrv_chisquared.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following the distribution of the logarithm of a χ^2 random variable:

$$\text{qtf}_X(q) = \log\left(2Q^{-1}(n/2, q)\right).$$

Here $Q^{-1}(\cdot)$ denotes the inverse of the upper regularized incomplete gamma function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", logrv_chisquared(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_logrv_chisquared.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following the distribution of the logarithm of a χ^2 random variable:

$$C_X(t) = 2^{it}\frac{\Gamma(n/2 + it)}{\Gamma(n/2)}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", logrv_chisquared(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_logrv_chisquared.**m_x**(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following the distribution of the logarithm of a χ^2 random variable:

$$M_X(t) = 2^{t}\frac{\Gamma(n/2 + t)}{\Gamma(n/2)}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", logrv_chisquared(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_logrv_chisquared.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function, and its j^{th} derivatives, $K_X^{(j)}(t), j = 1 \ldots k$, of a random variable X, following the distribution of the logarithm of a χ^2 random variable:

$$K_X(t) = t \cdot \log(2) + \log\left(\Gamma(n/2 + t)\right) - \log\left(\Gamma(n/2)\right)$$

$$K_X^{(1)}(t) = \log(2) + \psi^{(0)}(n/2 + t),$$

$$K_X^{(j)}(t) = \psi^{(j-1)}(n/2 + t), \quad j \geq 2.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", logrv_chisquared(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

dist_logrv_chisquared.**moments**(*k*)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following the distribution of the logarithm of a χ^2 random variable: the moments are calculated from the cumulants.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", logrv_chisquared(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_logrv_chisquared.**cumulants**(*k*)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following the distribution of the logarithm of a χ^2 random variable:

$$\kappa_1 = \log(2) + \psi^{(0)}(n/2),$$

$$\kappa_r = \psi^{(r-1)}(n/2), \quad r \geq 2,$$

where $\psi^{(r)}(\cdot)$ is the polygamma function of order r.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", logrv_chisquared(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

Approximations

ctx.**logrv_chisquared_ecf**(*x*, *f*, *results='cdf'*)

where ctx is ipm, dec, mpm, or gmp.

Calculates the Edgeworth approximation to the pdf, cdf and sf.

ctx.**logrv_chisquared_ecf_inv**(*q*, *f*, *results='qtf'*)

where ctx is ipm, dec, mpm, or gmp.

Calculates the Cornish-Fisher approximation to the qtf and isf.

4.7.10 Hypoexponential (Generalized Erlang) Distribution

class ctx.**dist_hypoexponential**(*n*, *lambdaj*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The hypoexponential distribution is a continuous probability distribution with n rate parameters $\lambda_j > 0, j = 1 \dots n$, and the support interval $(0, +\infty)$. It is the distribution of the sum of n independent exponential variables with parameters λ_j. It is called the hypoexponential distribution as it has a coefficient of variation less than one, compared to the hyperexponential distribution which has coefficient of variation greater than one and the exponential distribution which has coefficient of variation of one. If all parameters are equal ($\lambda_j = \lambda$), the hypoexponential distribution is identical with the Erlang distribution (which is a special case of the gamma distribution wherein the shape parameter of the distribution is an integer).

See also: Wikipedia [1207], Wikipedia [1194], MathWorld [250], Chesneau [176], Smaili K. [500].

dist_hypoexponential.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a hypoexponential distribution:

$$\text{pdf}_X(x) = \begin{cases} \dfrac{\lambda^n x^{n-1} e^{-\lambda x}}{(n-1)!} & \text{for all parameters equal: } \lambda_j = \lambda, \\ \displaystyle\sum_{j=1}^{n} \frac{\lambda_j}{d_j} e^{-\lambda_j x} & \text{for all parameters distinct: } \lambda_j \neq \lambda_k \text{ for } j \neq k, \\ -\boldsymbol{\alpha} e^{x\Theta} \Theta \mathbf{1} & \text{for general parameters: } \lambda_j > 0, \end{cases}$$

where $\boldsymbol{\alpha} = (1, 0, \dots, 0)$, $\mathbf{1}$ is a column vector of ones of the size n, e^A is the matrix exponential of A, and

$$d_j = \prod_{k=1, k\neq j}^{n} \left(1 - \frac{\lambda_j}{\lambda_k}\right), \quad \Theta = \begin{bmatrix} -\lambda_1 & \lambda_1 & 0 & \dots & 0 & 0 \\ 0 & -\lambda_2 & \lambda_2 & \ddots & 0 & 0 \\ \vdots & \ddots & \ddots & \ddots & \ddots & \vdots \\ 0 & 0 & \ddots & -\lambda_{n-2} & \lambda_{n-2} & 0 \\ 0 & 0 & \dots & 0 & -\lambda_{n-1} & \lambda_{n-1} \\ 0 & 0 & \dots & 0 & 0 & -\lambda_n \end{bmatrix}. \tag{4.1}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", mp_hypoexponential(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_hypoexponential.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a hypoexponential distribution:

$$\text{cdf}_X(x) = \begin{cases} P(n, \lambda x) & \text{for all parameters equal: } \lambda_j = \lambda, \\ 1 - \displaystyle\sum_{j=1}^{n} \frac{1}{d_j} e^{-\lambda_j x} & \text{for all parameters distinct: } \lambda_j \neq \lambda_k \text{ for } j \neq k, \\ 1 - \boldsymbol{\alpha} e^{x\Theta} \mathbf{1} & \text{for general parameters: } \lambda_j > 0, \end{cases}$$

where $P(\cdot)$ is the lower regularized gamma function, d_j and Θ are defined in equation (4.1), $\boldsymbol{\alpha} = (1, 0, \dots, 0)$, $\mathbf{1}$ is a column vector of ones of the size n, and e^A is the matrix exponential of A.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", mp_hypoexponential(mu, sigma).pdf(x))
6.356352346256452561561561561456 1356E-20
```

`dist_hypoexponential.sf(`x`)`

Returns $\mathrm{sf}_X(x)$, the survival function function (sf) of a random variable X, following a hypoexponential distribution:

$$\mathrm{sf}_X(x) = \begin{cases} Q(n, \lambda x) & \text{for all parameters equal: } \lambda_j = \lambda, \\ \displaystyle\sum_{j=1}^{n} \frac{1}{d_j} e^{-\lambda_j x} & \text{for all parameters distinct: } \lambda_j \neq \lambda_k \text{ for } j \neq k, \\ \boldsymbol{\alpha} e^{x\Theta} \mathbf{1} & \text{for general parameters: } \lambda_j > 0, \end{cases}$$

where $Q(\cdot)$ is the upper regularized gamma function, d_j and Θ are defined in equation (4.1), $\boldsymbol{\alpha} = (1, 0, \ldots, 0)$, $\mathbf{1}$ is a column vector of ones of the size n, and e^A is the matrix exponential of A.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", mp_hypoexponential(mu, sigma).pdf(x))
sf: 6.356352346256452561561561561456 1356E-20
```

`dist_hypoexponential.qtf(`q`)`

Returns $\mathrm{qtf}_X(x)$, the quantile function function (qtf) of a random variable X, following a hypoexponential distribution.

There is no known closed form for $\mathrm{qtf}_X(q)$ or $\mathrm{isf}_X(q)$: These functions are computed with Newton iterations where the starting values are from the corresponding Boost functions (in double precision).

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", mp_hypoexponential(mu, sigma).qtf(q))
qtf: 6.356352346256452561561561561456 1356E+00
```

`dist_hypoexponential.isf(`q`)`

Returns $\mathrm{isf}_X(q)$, the inverse survival function function (isf) of a random variable X, following a hypoexponential distribution.

There is no known closed form for $\mathrm{qtf}_X(q)$ or $\mathrm{isf}_X(q)$: These functions are computed with Newton iterations where the starting values are from the corresponding Boost functions (in double precision).

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", mp_hypoexponential(mu, sigma).isf(q))
6.356352346256452561561561561456 1356E+00
```

`dist_hypoexponential.c_x(`t`)`

Returns $C_X(t)$, the characteristic function of a random variable X, following a hypoexponential distribution:

$$C_X(t) = \prod_{j=1}^{n} \frac{\lambda_j}{\lambda_j - it}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", mp_hypoexponential(mu, sigma).c_x(t))
6.3563523462564525615615615614561356E+00
```

dist_hypoexponential.**m_x**(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following a hypoexponential distribution:

$$M_X(t) = \prod_{j=1}^{n} \frac{\lambda_j}{\lambda_j - t}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", mp_hypoexponential(mu, sigma).c_x(t))
6.3563523462564525615615615614561356E+00
```

dist_hypoexponential.**k_x**(t, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following a hypoexponential distribution:

$$K_X(t) = \sum_{j=1}^{n} \log\left(\frac{\lambda_j}{\lambda_j - t}\right)$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", mp_hypoexponential(mu, sigma).k_x(t, k))
6.3563523462564525615615615614561356E+00
```

dist_hypoexponential.**moments**(k)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following a hypoexponential distribution. The moments are calculated from the cumulants.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", mp_hypoexponential(mu, sigma).moments(k))
6.3563523462564525615615615614561356E+00
```

dist_hypoexponential.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following a hypoexponential distribution. The cumulants are given by

$$\kappa_X(r) = (r-1)! \sum_{j=1}^{n} \frac{1}{\lambda_j^r}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", mp_hypoexponential(mu, sigma).cumulants(k))
6.356352346256452561561561561456135 6E+00
```

4.7.11 Lindley distribution (generalized)

class ctx.**dist_lindley**(b)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The Lindley distribution is a continuous probability distribution with scale $b > 0$, and the support interval $(0, +\infty)$.

See also: Al-Babtain *et al.* [7], Zakerzadeh and Dolati [1492], Lindley [407].

dist_lindley.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following an Lindley distribution:

$$\mathrm{pdf}_X(x) = \frac{\theta^2}{\eta + \theta k}\left(\frac{k(\theta x)^{\alpha-1}}{\Gamma(\alpha)} + \frac{\eta(\theta x)^{\beta-1}}{\theta\Gamma(\beta)}\right)e^{-\theta x}, \quad x > 0.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", lindley(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_lindley.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following an Lindley distribution:

$$\mathrm{cdf}_X(x) = \frac{1}{\eta + \theta k}\left(\theta k P(\alpha, \theta x) + \eta P(\beta, \theta x)\right), \quad x > 0.$$

$$\mathrm{cdf}_X(x) = w \cdot P(\alpha, \theta x) + (1 - w) \cdot P(\beta, \theta x), \quad w = \frac{\theta k}{\eta + \theta k}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", lindley(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_lindley.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following an Lindley distribution:

$$\mathrm{sf}_X(x) = 1 - \frac{1}{\eta + \theta k}\left(\theta k P(\alpha, \theta x) + \eta P(\beta, \theta x)\right), \quad x > 0.$$

$$\mathrm{sf}_X(x) = w \cdot Q(\alpha, \theta x) + (1 - w) \cdot Q(\beta, \theta x), \quad w = \frac{\theta k}{\eta + \theta k}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", lindley(mu, sigma).pdf(x))
sf: 6.3563523462564525615615615614561356E-20
```

dist_lindley.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following an Lindley distribution:

$$\text{qtf}_X(q) = \frac{1}{\theta}\left(w \cdot P^{-1}(\alpha, q) + (1-w) \cdot P^{-1}(\beta, q)\right), \quad w = \frac{\theta k}{\eta + \theta k}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", lindley(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_lindley.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following an Lindley distribution:

$$\text{isf}_X(q) = \frac{1}{\theta}\left(w \cdot Q^{-1}(\alpha, q) + (1-w) \cdot Q^{-1}(\beta, q)\right), \quad w = \frac{\theta k}{\eta + \theta k}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", lindley(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_lindley.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following an Lindley distribution:

$$C_X(t) = \frac{1}{\eta + \theta k}\left[\theta k \left(1 - \frac{it}{\theta}\right)^{-\alpha} + \eta \left(1 - \frac{it}{\theta}\right)^{-\beta}\right].$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", lindley(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_lindley.**m_x**(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following an Lindley distribution:

$$M_X(t) = \frac{1}{\eta + \theta k}\left[\theta k \left(1 - \frac{t}{\theta}\right)^{-\alpha} + \eta \left(1 - \frac{t}{\theta}\right)^{-\beta}\right].$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("m_x: ", lindley(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_lindley.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following an Lindley distribution:

$$K_X(t) = \log\left(M(t)\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", lindley(mu, sigma).k_x(t, k))
6.356352346256452561561561561456135 6E+00
```

dist_lindley.**moments**(*k*)

Returns the first j raw moments, $\mu'_j, j = 1 \ldots k$, of a random variable X, following an Lindley distribution (Wikipedia). The raw moments are given by

$$\mu'_X(k) = \frac{\alpha(\alpha+1)\cdots(\alpha+r-1)\theta k + \beta(\beta+1)\cdots(\beta+r-1)\eta}{\theta^r(\eta+\theta k)}.$$

$$\mu'_X(k) = \frac{w}{\theta^r}\frac{\Gamma(\alpha+r)}{\Gamma(\alpha)} + \frac{1-w}{\theta^r}\frac{\Gamma(\beta+r)}{\Gamma(\beta)}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", lindley(mu, sigma).moments(k))
6.356352346256452561561561561456135 6E+00
```

dist_lindley.**cumulants**(*k*)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following an Lindley distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", lindley(mu, sigma).cumulants(k))
6.356352346256452561561561561456135 6E+00
```

4.7.12 Skew exponential power distribution

class ctx.**skewexponpower**(a, b)

where ctx is dec, mpm, ipm, fpm, gmp or arb.

The skew exponential power distribution is a continuous probability distribution with parameters $a > 0$ and $b > 0$, and the support interval $(0, +\infty)$.

See also: Hutson [375], Kleiber and Kotz [391] (p. 131), Wikipedia [1206], MathWorld [247].

skewexponpower.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a skew exponential power distribution:

$$\mathrm{pdf}_X(x) = \frac{1}{k\sigma} \exp\left(-\tfrac{1}{2}\left(|z| + (2\alpha - 1)z\right)\right)^{1/c}, \quad \text{where } c = \frac{1+\beta}{2}, \quad k = \frac{4\alpha(1-\alpha)}{\Gamma(1+c)2^{1+c}}, \quad z = \frac{x-\theta}{\sigma}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", fisher_f(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

skewexponpower.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a skew exponential power distribution:

$$\mathrm{cdf}_X(x) = \begin{cases} \alpha P\left(c, 2^{(1/c)-1}((\alpha-1)z)^{1/c}\right) & \text{if } z \le 0 \\ 1 - (1-\alpha)P\left(c, 2^{(1/c)-1}(\alpha z)^{1/c}\right) & \text{if } z > 0 \end{cases}, \quad \text{where } c = \frac{1+\beta}{2}, \quad z = \frac{x-\theta}{\sigma}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", fisher_f(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

skewexponpower.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following a skew exponential power distribution:

$$\mathrm{sf}_X(x) = \begin{cases} 1 - \alpha P\left(c, 2^{(1/c)-1}((\alpha-1)z)^{1/c}\right) & \text{if } z \le 0 \\ (1-\alpha)P\left(c, 2^{(1/c)-1}(\alpha z)^{1/c}\right) & \text{if } z > 0 \end{cases}, \quad \text{where } c = \frac{1+\beta}{2}, \quad z = \frac{x-\theta}{\sigma}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", fisher_f(mu, sigma).pdf(x))
sf: 6.3563523462564525615615615614561356E-20
```

skewexponpower.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following a skew exponential power distribution:

$$\text{qtf}_X(q) = \begin{cases} \theta + \frac{\sigma}{1-\alpha}\left(2^{((1/c)-1)/2}\sqrt{P^{-1}\left(c, q/\alpha\right)}\right)^{\beta+1} & \text{if } q \leq \alpha \\ \theta + \frac{\sigma}{\alpha}\left(2^{((1/c)-1)/2}\sqrt{P^{-1}\left(c, (1-q)/(1-\alpha)\right)}\right)^{\beta+1} & \text{if } q > \alpha \end{cases}, \quad \text{where } c = \frac{1+\beta}{2}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", fisher_f(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

skewexponpower.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following a skew exponential power distribution:

$$\text{isf}_X(q) = \begin{cases} \theta + \frac{\sigma}{1-\alpha}\left(2^{((1/c)-1)/2}\sqrt{P^{-1}\left(c, q/\alpha\right)}\right)^{\beta+1} & \text{if } q \leq \alpha \\ \theta + \frac{\sigma}{\alpha}\left(2^{((1/c)-1)/2}\sqrt{P^{-1}\left(c, (1-q)/(1-\alpha)\right)}\right)^{\beta+1} & \text{if } q > \alpha \end{cases}, \quad \text{where } c = \frac{1+\beta}{2}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

skewexponpower.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following a skew exponential power distribution:

$$C_X(t) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", fisher_f(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

skewexponpower.**m_x**(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following a skew exponential power distribution:

$$M_X(t) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", fisher_f(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

skewexponpower.**k_x**(t, k=*0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following a skew exponential power distribution:

$$K_X(t) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", fisher_f(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

skewexponpower.**moments**(k)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following a skew exponential power distribution. All moments exist. The moments of $Z = (X - \theta)/\sigma$ are given by

$$\mu'_Z(r) = \frac{(\beta+1) \cdot \left((-2)^r \alpha^{r+1} + (1-\alpha)(2(1-\alpha))^r\right) \cdot 2^{(\beta-3)r/2-1} \cdot \Gamma((\beta+1)(r+1)/2)}{(1-\alpha)^r \alpha^r \Gamma((\beta+3)/2)}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", fisher_f(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

skewexponpower.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following a skew exponential power distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", fisher_f(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

4.7.13 Stacy (generalized gamma) distribution

class ctx.**dist_stacy**(a, b)

where ctx is dec, mpm, ipm, fpm, gmp or arb.

The Stacy distribution distribution is a continuous probability distribution with parameters $a > 0$ and $b > 0$, and the support interval $(0, +\infty)$.

See also Wikipedia [1204], Crooks [187] (p.87).

dist_stacy.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a Stacy distribution:

$$\mathrm{pdf}_X(x) = \frac{|\beta|}{\Gamma(\alpha)|\theta|}\left(\frac{x}{\theta}\right)^{\alpha\beta-1}\exp\left(-\left(\frac{x}{\theta}\right)^{\beta}\right)$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", fisher_f(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_stacy.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a Stacy distribution:

$$\mathrm{cdf}_X(x) = P(\alpha, z) \quad \text{for } \beta/\theta > 0, \quad \text{where } z = \left(\frac{x}{\theta}\right)^{\beta}$$

$$\mathrm{cdf}_X(x) = Q(\alpha, z) \quad \text{for } \beta/\theta < 0, \quad \text{where } z = \left(\frac{x}{\theta}\right)^{\beta}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", fisher_f(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_stacy.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following a Stacy distribution:

$$\mathrm{sf}_X(x) = Q(\alpha, z) \quad \text{for } \beta/\theta < 0 \quad \text{where } z = \left(\frac{x}{\theta}\right)^{\beta}$$

$$\mathrm{sf}_X(x) = P(\alpha, z) \quad \text{for } \beta/\theta > 0, \quad \text{where } z = \left(\frac{x}{\theta}\right)^{\beta}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", fisher_f(mu, sigma).pdf(x))
sf: 6.35635234625645256156156145613 56E-20
```

dist_stacy.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following a Stacy distribution:

$$\text{qtf}_X(q) = \theta \cdot z^{1/\beta}; z = P^{-1}(\alpha, q) \quad \text{for } \beta/\theta > 0$$

$$\text{qtf}_X(q) = \theta \cdot z^{1/\beta}; z = Q^{-1}(\alpha, q) \quad \text{for } \beta/\theta < 0$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", fisher_f(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_stacy.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following a Stacy distribution:

$$\text{isf}_X(q) = \theta \cdot z^{1/\beta}; z = Q^{-1}(\alpha, q) \quad \text{for } \beta/\theta > 0$$

$$\text{isf}_X(q) = \theta \cdot z^{1/\beta}; z = P^{-1}(\alpha, q) \quad \text{for } \beta/\theta < 0$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_stacy.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following a Stacy distribution:

$$C_X(t) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", fisher_f(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_stacy.**m_x**(t)

Returns `NaN`, since the moment generating function does not exist.

dist_stacy.**k_x**(t, *k=0*)

Returns `NaN`, since the cumulant generating function does not exist.

dist_stacy.**moments**(k)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following a Stacy distribution. The rth moments only exists for $n_2 > 2r$.

$$\mu'_X(r) = ??$$

Standard moments:

$$\mu'_X(r) = \frac{\Gamma(\alpha + r/\beta)}{\Gamma(\alpha)}, \quad \alpha + r/\beta) > 0$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", fisher_f(mu, sigma).moments(k))
6.35635234625645256156156145613356E+00
```

dist_stacy.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following a Stacy distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", fisher_f(mu, sigma).cumulants(k))
6.35635234625645256156156145613356E+00
```

4.8 Closed form distributions, based on the incomplete beta function

4.8.1 Boost: Beta (Pearson Type I and II) distribution

Returns the pdf, cdf, qtf or boost class of a random variable X, following a beta distribution with parameters $a > 0$, $b > 0$, and the support interval $(0, 1)$.

See also Wikipedia [1141], MathWorld [791], BoostMath [51], Ehrhardt [295] (3.9.2).

`math53.beta_pdf`(a, b, x)

Returns $\text{pdf}(x)$, the value of the probability density function (*Pdf*) of the beta distribution:

$$\text{pdf}(x) = f_{\text{Beta}}(a, b, x) = \frac{1}{B(a, b)} x^{a-1}(1 - x)^{b-1}.$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("BetaPdf(x, a, b): ", BetaPdf(x, a, b))
>>> print ("dist_beta(a, b).pdf(x): ", dist_beta(a, b).pdf(x))
6.356352346256452561561561561456135 6E+00
```

`math53.beta_cdf`(a, b, x)

Returns $\text{cdf}(x)$, the value of the cumulative distribution function (*Cdf*) of the beta distribution:

$$\text{cdf}(x) = I_x(a, b) = \text{ibeta}(a, b, x).$$

Here $\text{ibeta}(\cdot)$ denotes the real normalised incomplete beta function (*RealIBeta*).

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("BetaCdf(x, a, b): ", BetaCdf(x, a, b))
>>> print ("dist_beta(a, b).cdf(x): ", dist_beta(a, b).cdf(x))
6.356352346256452561561561561456135 6E+00
```

`math53.beta_qtf`(a, b, q)

Returns $\text{qtf}(q)$, the value of the quantile function (*Qtf*) of the beta distribution:

$$\text{qtf}(q) = \text{ibeta_inv}(a, b, q).$$

Here $\text{ibeta_inv}(\cdot)$ denotes the inverse of the real normalised incomplete beta function (*RealIBetaInv*).

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("BetaQtf(q, a, b): ", BetaQtf(q, a, b))
>>> print ("dist_beta(a, b).qtf(q): ", dist_beta(a, b).qtf(q))
6.356352346256452561561561561456135 6E+00
```

class ctx.**dist_beta**(a, b)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The beta distribution is a continuous probability distribution with parameters $a > 0$, $b > 0$, and the support interval $(0, 1)$. See also Wikipedia [1141], MathWorld [791], BoostMath [51], Witkovský [1456], R (Statistical System) [517].

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.betainc.html#scipy.special.betainc

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.betaincinv.html#scipy.special.betaincinv

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.btdtria.html#scipy.special.btdtria

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.btdtrib.html#scipy.special.btdtrib

dist_beta.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a beta distribution:

$$\mathrm{pdf}_X(x) = f_{\mathrm{Beta}}(a, b, x) = \frac{1}{B(a, b)} x^{a-1}(1-x)^{b-1}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", beta(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_beta.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a beta distribution:

$$\mathrm{cdf}_X(x) = I_x(a, b) = \mathrm{ibeta}(a, b, x).$$

Here $\mathrm{ibeta}(\cdot)$ denotes the real normalised incomplete beta function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", beta(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_beta.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following a beta distribution:

$$\mathrm{sf}_X(x) = 1 - I_x(a, b) = \mathrm{ibetac}(a, b, x).$$

Here $\mathrm{ibetac}(\cdot)$ denotes the real normalised complementary incomplete beta function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", beta(mu, sigma).pdf(x))
sf: 6.35635234625645256156156145613 56E-20
```

dist_beta.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following a beta distribution:

$$\text{qtf}_X(q) = \text{ibeta_inv}(a, b, q).$$

Here $\text{ibeta_inv}(\cdot)$ denotes the inverse of the real normalised incomplete beta function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", beta(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_beta.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following a beta distribution:

$$\text{isf}_X(q) = \text{ibetac_inv}(a, b, q).$$

Here $\text{ibetac_inv}(\cdot)$ denotes the inverse of the real normalised complementary incomplete beta function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", beta(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_beta.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following a beta distribution:

$$C_X(t) = {}_1F_1(a, a + b; it).$$

where ${}_1F_1()$ is Kummer's confluent hypergeometric function (of the first kind).

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", beta(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_beta.**m_x**(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following a beta distribution:

$$M_X(t) = {}_1F_1(a, a + b; t).$$

where ${}_1F_1()$ is Kummer's confluent hypergeometric function (of the first kind).

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", beta(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_beta.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function, and its j^{th} derivatives, $K_X^{(j)}(t), j = 1 \ldots k$, of a random variable X, following a beta distribution:

$$K_X(t) = \log({}_1F_1(a, a+b; t)),$$

$$K_X^{(j)}(t) = tbd.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", beta(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

dist_beta.**moments**(*k*)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following a beta distribution: the moments are calculated from the cumulants.

$$\mu'_h = \frac{\Gamma(a+h)\Gamma(a+b)}{\Gamma(a)\Gamma(a+b+h)}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", beta(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_beta.**cumulants**(*k*)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following a beta distribution: The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", beta(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

Recurrences: Central Beta

ctx.**beta_recurrence**(*x*, *n*, *lambda*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

The following recurrence relations hold for the pdf and CDF:

$$I(a,b;x) = 1 - I(b,a;1-x) \tag{4.2}$$

$$I(a,b;x) = \binom{n}{a} x^a (1-x)^{b-1} + I(a+1, b-1; x) \tag{4.3}$$

$$I(a,b;x) = \binom{n}{a} x^a (1-x)^b + I(a+1, b; x) \tag{4.4}$$

$$I(a,b+1;x) = \binom{n}{a} x^a (1-x)^b + I(a, b; x) \tag{4.5}$$

$$I(a,b;x) = \binom{n}{a+b} x^a (1-x)^b \frac{a}{a+b-x} + I(a+1, b+1; x) \tag{4.6}$$

$$I(a,b;x) = F\left(2a, 2b, \frac{nx}{m-mx}\right) \tag{4.7}$$

4.8.2 Boost: Central Fisher F distribution

The following functions return the pdf, cdf, qtf or boost class of the Fisher F distribution with $m > 0$ and $n > 0$ degrees of freedom, and the support interval $(0, +\infty)$.

See also Wikipedia [1146], MathWorld [795], BoostMath [56], Ehrhardt [295] (3.9.9).

`math53.fisher_f_pdf(m, n, x)`

Returns pdf(x), the value of the probability density function (*Pdf*) of the Fisher F distribution:

$$\text{pdf}(x) = \frac{m^{m/2} n^{n/2}}{B(m/2, n/2)} x^{(m-2)/2} (n + mx)^{-(m+n)/2}.$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("FisherFPdf(x, a, b): ", FisherFPdf(x, a, b))
>>> print ("dist_fisher_f(a, b).pdf(x): ", dist_fisher_f(a, b).pdf(x))
6.35635234625645256156156145613 56E+00
```

`math53.fisher_f_cdf(m, n, x)`

Returns cdf(x), the value of the cumulative distribution function (*Cdf*) of the Fisher F distribution:

$$\text{cdf}(x) = \begin{cases} \text{ibetac}(n/2, m/2, n/(n + mx)), & mx > n, \\ \text{ibeta}(m/2, n/2, mx/(n + mx)) & mx \le n. \end{cases}$$

Here ibeta$(\cdot)$ denotes the real normalised incomplete beta function (*RealIBeta*), and ibetac$(\cdot)$ denotes the real normalised complementary incomplete beta function (*RealIBetac*).

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("FisherFCdf(x, a, b): ", FisherFCdf(x, a, b))
>>> print ("dist_fisher_f(a, b).cdf(x): ", dist_fisher_f(a, b).cdf(x))
6.35635234625645256156156145613 56E+00
```

`math53.fisher_f_qtf(m, n, q)`

Returns qtf(q), the value of the quantile function (*Qtf*) of the Fisher F distribution:

$$\text{qtf}(q) = \frac{nx}{m(1 - x)}, \quad \text{where } x = \text{ibeta_inv}(m/2, n/2, q).$$

Here ibeta_inv$(\cdot)$ denotes the inverse of the real normalised incomplete beta function (*RealIBetaInv*).

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("FisherFQtf(q, a, b): ", FisherFQtf(q, a, b))
>>> print ("dist_fisher_f(a, b).qtf(q): ", dist_fisher_f(a, b).qtf(q))
6.35635234625645256156156145613 56E+00
```

class ctx.**dist_fisher_f**(m, n)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The Fisher F-distribution is a continuous probability distribution with $m > 0$ and $n > 0$ degrees of freedom, and the support interval $(0, +\infty)$. See also Wikipedia [1146], MathWorld [795], BoostMath [56], Witkovský [1459], R (Statistical System) [521], Abramowitz and Stegun. [3], Butler and Paolella [166], Chattamvelli and Jones [175], Witkovský [1453].

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.fdtr.html#scipy.special.fdtr

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.fdtrc.html#scipy.special.fdtrc

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.fdtri.html#scipy.special.fdtri

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.fdtridfd.html#scipy.special.fdtridfd

dist_fisher_f.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a central Fisher F distribution:

$$\mathrm{pdf}_X(x) = \frac{m^{m/2} n^{n/2}}{B(m/2, n/2)} x^{(m-2)/2} (n + mx)^{-(m+n)/2},$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", fisher_f(mu, sigma).pdf(x))
6.356352346256452561561561561456135 6E-20
```

dist_fisher_f.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a central Fisher F distribution:

$$\mathrm{cdf}_X(x) = \begin{cases} \mathrm{ibetac}(n/2, m/2, n/(n+mx)), & mx > n, \\ \mathrm{ibeta}(m/2, n/2, mx/(n+mx)) & mx \le n. \end{cases}$$

Here $\mathrm{ibeta}(\cdot)$ denotes the real normalised incomplete beta function, and $\mathrm{ibetac}(\cdot)$ denotes the real normalised complementary incomplete beta function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", fisher_f(mu, sigma).pdf(x))
6.356352346256452561561561561456135 6E-20
```

dist_fisher_f.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following a central Fisher F distribution:

$$\mathrm{sf}_X(x) = \begin{cases} \mathrm{ibeta}(n/2, m/2, n/(n+mx)), & mx > n, \\ \mathrm{ibetac}(m/2, n/2, mx/(n+mx)) & mx \le n. \end{cases}$$

Here $\mathrm{ibeta}(\cdot)$ denotes the real normalised incomplete beta function, and $\mathrm{ibetac}(\cdot)$ denotes the real normalised complementary incomplete beta function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", fisher_f(mu, sigma).pdf(x))
sf: 6.356352346256452561561561561456135 6E-20
```

dist_fisher_f.**qtf**(*q*)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following a central Fisher F distribution:

$$\text{qtf}_X(q) = \frac{nx}{m(1-x)}, \quad \text{where } x = \text{ibeta_inv}(m/2, n/2, q).$$

Here $\text{ibeta_inv}(\cdot)$ denotes the inverse of the real normalised incomplete beta function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", fisher_f(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_fisher_f.**isf**(*q*)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following a central Fisher F distribution:

$$\text{isf}_X(q) = \frac{nx}{m(1-x)}, \quad \text{where } x = \text{ibetac_inv}(m/2, n/2, q).$$

Here $\text{ibetac_inv}(\cdot)$ denotes the inverse of the real normalised complementary incomplete beta function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_fisher_f.**c_x**(*t*)

Returns $C_X(t)$, the characteristic function of a random variable X, following a central Fisher F distribution:

$$C_X(t) = \int_0^\infty e^{itx} \text{pdf}_X(x) \mathrm{d}x = \frac{\Gamma(m/2+n/2)}{\Gamma(n/2)} U\left(\frac{m}{2}, 1-\frac{n}{2}, -\frac{n}{m}it\right)$$

where $U(\cdot)$ denotes the confluent hypergeometric function of the second kind.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", fisher_f(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_fisher_f.**m_x**(*t*)

Returns `NaN`, since the moment generating function does not exist.

dist_fisher_f.**k_x**(*t*, *k=0*)

Returns `NaN`, since the cumulant generating function does not exist.

dist_fisher_f.**moments**(*k*)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following a central Fisher F distribution. The rth moments only exists for $n_2 > 2r$.

$$\mu'_X(r) = \mu'_F(r) = \frac{\Gamma(\frac{1}{2}n_1 + r) - \Gamma(\frac{1}{2}n_2 - r)}{\Gamma(\frac{1}{2}n_2)}, \quad \text{for } n_2 > 2r.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", fisher_f(mu, sigma).moments(k))
6.356352346256452561561561456135 6E+00
```

dist_fisher_f.**cumulants**(*k*)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following a central Fisher F distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", fisher_f(mu, sigma).cumulants(k))
6.356352346256452561561561456135 6E+00
```

Additional methods: Recurrence relations

Let the density $g_{m,n}$ be that of m/n times an $F_{m,n}$ random variable. Let $G_{m,n}(y)$ be its distribution function.

Then the following recurrence relations hold (see Chattamvelli, 1995)

dist_fisher_f.**recurrence_pdf**(*x*, *lambda*, *start_n1*, *start_n2*, *target_n1*, *target_n2*)

Applies a recurrence relation to calculate the cdf for different degrees of freedom for a given value of *x*. This is mostly useful when using asymptotic methods.

$$n\left[G_{m,n+2}(y) - G_{m-2,n+2}(y)\right] = -2g_{m,n}(y)$$

$$m(1+y)]g_{m+2,n}(y) + y(m+n)g_{m,n}(y).$$

$$n(1+y)g_{m,n+2}(y) = (m+n)g_{m,n}(y).$$

$$mg_{m+2,n-2}(y) = (n-2)yg_{m,n}(y).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", fisher_f(mu, sigma).k_x(t, k))
6.356352346256452561561561456135 6E+00
```

dist_fisher_f.**recurrence_cdf**(*x*, *lambda*, *start_n1*, *start_n2*, *target_n1*, *target_n2*)

Applies a recurrence relation to calculate the cdf for different degrees of freedom for a given value of *x*. This is mostly useful when using asymptotic methods.

From these equations we obtain

$$\begin{aligned}[(m+2)(1+y)]G_{m+4,n}(y) &= [(m+2)(1+y) + y(m+n]G_{m+2,n}(y) \\ &- y(m+n)G_{m,n}(y)\end{aligned} \tag{4.8}$$

$$n(1+y) : cite : t : `G_{m,n+2}(y) - G_{m+2,n+2}(y)] = (m+n) : cite : t : `G_{m,n}(y) - G_{m+2,n}(y)]$$

$$(m+2) : cite : t : `G_{m+2,n}(y) - G_{m+4,n-2}(y)] = (n-2) : cite : t : `G_{m,n}(y) - G_{m+2,n}(y)]$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", fisher_f(mu, sigma).k_x(t, k))
6.356352346256452561561561561456l356E+00
```

4.8.3 Boost: Student t (Pearson Type VII) distribution

The following functions return the pdf, cdf, qtf or boost class of the Student t distribution with $n > 0$ degrees of freedom and the support interval $(-\infty, +\infty)$.

See also Wikipedia [1166], MathWorld [809], BoostMath [69], Ehrhardt [295] (3.9.29).

`math53.student_t_pdf`(n, x)

Returns $\text{pdf}(x)$, the value of the probability density function (*Pdf*) of the Student t distribution:

$$\text{pdf}(x) = \frac{\Gamma((n+1)/2)}{\sqrt{n\pi}\Gamma(n/2)} \left(\frac{n}{n+t^2}\right)^{(n+1)/2}.$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("StudentTPdf(x, a, b): ", StudentTPdf(x, a, b))
>>> print ("dist_student_t(a, b).pdf(x): ", dist_student_t(a, b).pdf(x))
6.35635234625645256156156145613 56E+00
```

`math53.student_t_cdf`(n, x)

Returns $\text{cdf}(x)$, the value of the cumulative distribution function (*Cdf*) of the Student t distribution:

$$\text{cdf}(x) = \begin{cases} 1-p, & x > 0, \\ p & x \le 0. \end{cases}, \quad \text{where } p = \begin{cases} \text{ibeta}(n/2, 1/2, n/(n+x^2))/2, & n < 2x^2, \\ \text{ibetac}(1/2, n/2, x^2/(n+x^2))/2, & n \ge 2x^2. \end{cases}$$

Here $\text{ibeta}(\cdot)$ denotes the real normalised incomplete beta function (*RealIBeta*), and $\text{ibetac}(\cdot)$ denotes the real normalised complementary incomplete beta function (*RealIBetac*).

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("StudentTCdf(x, a, b): ", StudentTCdf(x, a, b))
>>> print ("dist_student_t(a, b).cdf(x): ", dist_student_t(a, b).cdf(x))
6.35635234625645256156156145613 56E+00
```

`math53.student_t_qtf`(n, q)

where `Ctx` is `Math53` or `CtxBoost`.

Returns $\text{qtf}(q)$, the value of the quantile function (*Qtf*) of the Student t distribution:

$$\text{qtf}(q) = t_{\nu,\alpha} = \text{sign}(q-0.5)\sqrt{n(1-x)/x}, \quad \text{where } x = \text{ibeta_inv}\left(\tfrac{1}{2}n, \tfrac{1}{2}, 2\cdot\min(q, 1-q)\right).$$

Here $\text{ibeta_inv}(\cdot)$ denotes the inverse of the real normalised incomplete beta function (*RealIBetaInv*).

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("StudentTQtf(q, a, b): ", StudentTQtf(q, a, b))
>>> print ("dist_student_t(a, b).qtf(q): ", dist_student_t(a, b).qtf(q))
6.35635234625645256156156145613 56E+00
```

class ctx.**dist_student_t**(n)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The Student t distribution is a continuous probability distribution with $n > 0$ degrees of freedom and the support interval $(-\infty, +\infty)$. See also Wikipedia [1166], MathWorld [809], BoostMath [69], Broda and Paolella [160], Witkovský [1453], Witkovský [1472], R (Statistical System) [525].

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.stats.t.html#scipy.stats.t

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.stdtr.html#scipy.special.stdtr

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.stdtridf.html#scipy.special.stdtridf

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.stdtrit.html#scipy.special.stdtrit

dist_student_t.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a central Student t distribution:

$$\mathrm{pdf}_X(x) = \frac{\Gamma((n+1)/2)}{\sqrt{n\pi}\Gamma(n/2)} \left(\frac{n}{n+t^2}\right)^{(n+1)/2}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", student_t(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_student_t.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a central Student t distribution:

$$\mathrm{cdf}_X(x) = \begin{cases} 1-p, & x > 0, \\ p & x \le 0. \end{cases}, \quad \text{where } p = \begin{cases} \mathrm{ibeta}(n/2, 1/2, n/(n+x^2))/2, & n < 2x^2, \\ \mathrm{ibetac}(1/2, n/2, x^2/(n+x^2))/2, & n \ge 2x^2. \end{cases}$$

Here $\mathrm{ibeta}(\cdot)$ denotes the real normalised incomplete beta function, and $\mathrm{ibetac}(\cdot)$ denotes the real normalised complementary incomplete beta function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", student_t(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_student_t.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following a central Student t distribution:

$$\mathrm{sf}_X(x) = \mathrm{cdf}_X(-x)$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", student_t(mu, sigma).pdf(x))
sf: 6.35635234625645256156156145613 56E-20
```

`dist_student_t.qtf(q)`

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following a central Student t distribution:

$$\text{qtf}_X(q) = \text{sign}(q-0.5)\sqrt{n(1-x)/x}, \quad \text{where } x = \text{ibeta_inv}\left(\tfrac{1}{2}n, \tfrac{1}{2}, 2\cdot\min(q, 1-q)\right).$$

Here $\text{ibeta_inv}(\cdot)$ denotes the inverse of the real normalised incomplete beta function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", student_t(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

`dist_student_t.isf(q)`

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following a central Student t distribution:

$$\text{isf}_X(q) = -\text{qtf}_X(q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", student_t(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

`dist_student_t.c_x(t)`

Returns $C_X(t)$, the characteristic function of a random variable X, following a central Student t distribution:

$$C_X(t) = \frac{K_{n/2}(\sqrt{n}|t|)^{n/2}}{\Gamma(n/2)2^{n/2-1}},$$

where $K_n(\cdot)$ denotes the modified Bessel function of the second kind.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", student_t(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

`dist_student_t.m_x(t)`

Returns `NaN`, since the moment generating function does not exist.

`dist_student_t.k_x(t, k=0)`

Returns `NaN`, since the cumulant generating function does not exist.

`dist_student_t.moments(k)`

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following a central Student t distribution. The rth moments only exists for $n_2 > 2r$.

$$\mu'_X(r) = \mu'_t(r) = \left(\tfrac{1}{2}n\right)^{r/2} \frac{\Gamma\left(\frac{1}{2}(n-r)\right)}{\Gamma\left(\frac{1}{2}n\right)}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", student_t(mu, sigma).moments(k))
6.356352346256452561561561456l356E+00
```

dist_student_t.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following a central Student t distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", student_t(mu, sigma).cumulants(k))
6.356352346256452561561561456l356E+00
```

4.8.4 Distribution of the negative logarithm of a beta variable

class ctx.**dist_logrv_beta**(a, b)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The distribution of the negative logarithm of a beta variable with parameters $a > 0$ and $b > 0$ is a continuous probability distribution with the support interval $(0, +\infty)$. See also Wikipedia [1141], MathWorld [791], BoostMath [51], Witkovský [1456], R (Statistical System) [517].

dist_logrv_beta.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following the distribution of the negative logarithm of a beta variable:

$$\mathrm{pdf}_X(x) = e^{-x} f_{\mathrm{Beta}}(e^{-x}; a, b),$$

where $f_{\mathrm{Beta}}(\cdot, a, b)$ is the pdf of the Beta distribution with parameters a and b.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", fisher_f(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_logrv_beta.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following the distribution of the negative logarithm of a beta variable:

$$\mathrm{cdf}_X(x) = 1 - F_{\mathrm{Beta}}(e^{-x}; a, b),$$

where $F_{\mathrm{Beta}}(\cdot, a, b)$ is the cdf of the Beta distribution with parameters a and b.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", fisher_f(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_logrv_beta.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following the distribution of the negative logarithm of a beta variable:

$$\mathrm{sf}_X(x) = F_{\mathrm{Beta}}(e^{-x}; a, b),$$

where $F_{\mathrm{Beta}}(\cdot, a, b)$ is the cdf of the Beta distribution with parameters a and b.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", fisher_f(mu, sigma).pdf(x))
sf: 6.3563523462564525615615615614561356E-20
```

dist_logrv_beta.**qtf**(q)

Returns $\text{qtf}_X(q)$, the quantile function (qtf) of a random variable X, following the distribution of the negative logarithm of a beta variable:

$$\text{qtf}_X(q) = -\log\left(F^{-1}_{\text{Beta}}(1-q;a,b)\right),$$

where $F^{-1}_{\text{Beta}}(\cdot,a,b)$ is the qtf of the Beta distribution with parameters a and b.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", fisher_f(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_logrv_beta.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following the distribution of the negative logarithm of a beta variable:

$$\text{isf}_X(q) = -\log\left(F^{-1}_{\text{Beta}}(q;a,b)\right),$$

where $F^{-1}_{\text{Beta}}(\cdot,a,b)$ is the qtf of the Beta distribution with parameters a and b.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_logrv_beta.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following the distribution of the negative logarithm of a beta variable:

$$C_X(t) = \frac{\Gamma\left((a-it)\right)\Gamma\left((a+b)\right)}{\Gamma\left(a\right)\Gamma\left(a+b-it\right)}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_logrv_beta.**m_x**(t)

Returns the moment generating function of a random variable X, following the distribution of the negative logarithm of a beta variable.

$$M_X(t) = \frac{\Gamma\left((a-t)\right)\Gamma\left((a+b)\right)}{\Gamma\left(a\right)\Gamma\left(a+b-t\right)}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_logrv_beta.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function, and its j^{th} derivatives, $K_X^{(j)}(t), j = 1 \ldots k$, of a random variable X, following the distribution of the negative logarithm of a beta variable.

$$K_X(t) = \log\left(\Gamma(a-t)\right) - \log\left(\Gamma(a+b-t)\right) + \log\left(\Gamma(a+b)\right) - \log\left(\Gamma(a)\right).$$

$$K_X^{(j)}(t) = (-1)^j \left(\psi^{(j-1)}(a-t) - \psi^{(j-1)}(a+b-t)\right)$$

where $\psi^{(j)}(\cdot)$ is the polygamma function of order j.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_logrv_beta.**moments**(*k*)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following the distribution of the negative logarithm of a beta variable. The moments are calculated from the cumulants.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_logrv_beta.**cumulants**(*k*)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following the distribution of the negative logarithm of a beta variable.

$$\kappa_j = (-1)^j \left(\psi^{(j-1)}(a) - \psi^{(j-1)}(a+b)\right)$$

where $\psi^{(j)}(\cdot)$ is the polygamma function of order j.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

Approximations

ctx.**logrv_beta_ecf_pdf**(*x*, *a*, *b*, *results='cdf'*)

where ctx is ipm, dec, mpm, or gmp.

Calculates the Edgeworth approximation to the pdf, cdf and sf.

ctx.**logrv_beta_ecf_qtf**(*q*, *a*, *b*, *results='cdf'*)

where ctx is ipm, dec, mpm, or gmp.

Calculates the Cornish-Fisher approximation to the qtf and isf.

4.8.5 Beta-prime (Pearson Type VI) distribution

class ctx.**dist_beta_prime**(a, b)

where ctx is dec, mpm, ipm, fpm, gmp or arb.

The beta-prime distribution is a continuous probability distribution with parameters $a > 0$ and $b > 0$, and the support interval $(0, +\infty)$.

See also Wikipedia [1191], Becker [27].

Pearson Type I: Beta

Pearson Type II: Symmetric Beta

Pearson Type III: Gamma

Pearson Type IV: Extra

Pearson Type V: Inverse Gamma

Pearson Type VI: Beta Prime

Pearson Type VII: Student's t

dist_beta_prime.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a beta-prime distribution:

$$\mathrm{pdf}_X(x) = f(x) = \frac{x^{\alpha-1}(1+x)^{-\alpha-\beta}}{B(\alpha,\beta)}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", fisher_f(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_beta_prime.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a beta-prime distribution:

$$\mathrm{cdf}_X(x) = I_{\frac{x}{1+x}}(a,b)$$

Here ibeta$(\cdot)$ denotes the real normalised incomplete beta function, and ibetac$(\cdot)$ denotes the real normalised complementary incomplete beta function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", fisher_f(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_beta_prime.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following a beta-prime distribution:

$$\mathrm{sf}_X(x) = 1 - I_{\frac{x}{1+x}}(a,b)$$

Here ibeta$(\cdot)$ denotes the real normalised incomplete beta function, and ibetac$(\cdot)$ denotes the real normalised complementary incomplete beta function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", fisher_f(mu, sigma).pdf(x))
sf: 6.3563523462564525615615615614561356E-20
```

`dist_beta_prime.qtf(`q`)`

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following a beta-prime distribution:

$$\text{qtf}_X(q) = ??, \quad \text{where } x = \text{ibeta_inv}(m/2, n/2, q).$$

Here $\text{ibeta_inv}(\cdot)$ denotes the inverse of the real normalised incomplete beta function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", fisher_f(mu, sigma).qtf(q))
qtf: 6.3563523462564525615615615614561356E+00
```

`dist_beta_prime.isf(`q`)`

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following a beta-prime distribution:

$$\text{isf}_X(q) = ??, \quad \text{where } x = \text{ibetac_inv}(m/2, n/2, q).$$

Here $\text{ibetac_inv}(\cdot)$ denotes the inverse of the real normalised complementary incomplete beta function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.3563523462564525615615615614561356E+00
```

`dist_beta_prime.c_x(`t`)`

Returns $C_X(t)$, the characteristic function of a random variable X, following a beta-prime distribution:

$$C_X(t) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", fisher_f(mu, sigma).c_x(t))
6.3563523462564525615615615614561356E+00
```

`dist_beta_prime.m_x(`t`)`

Returns `NaN`, since the moment generating function does not exist.

`dist_beta_prime.k_x(`t`, `*k=0*`)`

Returns `NaN`, since the cumulant generating function does not exist.

dist_beta_prime.**moments**(k)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following a beta-prime distribution. For $-\alpha < k < \beta$, the k-th moment is given by

$$\mu'_X(r) = \frac{B(\alpha + k, \beta - k)}{B(\alpha, \beta)}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", fisher_f(mu, sigma).moments(k))
6.356352346256452561561561561456 1356E+00
```

dist_beta_prime.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following a beta-prime distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", fisher_f(mu, sigma).cumulants(k))
6.356352346256452561561561561456 1356E+00
```

4.8.6 Generalized Beta (Type 1) distribution

class ctx.**dist_genbeta1**(a, b, p, q)

where ctx is dec, mpm, ipm, fpm, gmp or arb.

The Generalized Beta (Type 1) distribution distribution is a continuous probability distribution with parameters $a > 0$ and $b > 0$, $p > 0$, $q > 0$, and the support interval $(0, +\infty)$.

See also: Kleiber and Kotz [391] (page 230), Wikipedia [1203].

dist_genbeta1.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a Generalized Beta (Type 1) distribution:

$$\mathrm{pdf}_X(x) = \frac{a x^{ap-1}[1-(x/b)^a]^{q-1}}{b^{ap}B(p,q)}, \quad 0 \le x \le b.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", fisher_f(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_genbeta1.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a Generalized Beta (Type 1) distribution:

$$\mathrm{cdf}_X(x) = I_z(p,q), \quad \text{where } z = \left(\frac{y}{b}\right)^a, y = \left(\frac{x^a}{1+x^a}\right)^{1/a} \quad x > 0, \quad 0 \le x \le b.$$

See also: Kleiber, page 231

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", fisher_f(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_genbeta1.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following a Generalized Beta (Type 1) distribution:

$$\mathrm{sf}_X(x) = 1 - I_z(p,q) = I_{1-z}(p,q), \quad \text{where } z = \left(\frac{y}{b}\right)^a, y = \left(\frac{x^a}{1+x^a}\right)^{1/a} \quad x > 0, \quad 0 \le x \le b.$$

Here ibeta($\cdot$) denotes the real normalised incomplete beta function, and ibetac($\cdot$) denotes the real normalised complementary incomplete beta function. See Kleiber, page 188.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", fisher_f(mu, sigma).pdf(x))
sf: 6.35635234625645256156156145613 56E-20
```

dist_genbeta1.**qtf**(*q*)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following a Generalized Beta (Type 1) distribution:

$$\text{qtf}_X(\text{prob}) = b \cdot z^{1/a}, \quad \text{where } z = \text{ibeta_inv}(p, q, \text{prob}).$$

Here $\text{ibeta_inv}(\cdot)$ denotes the inverse of the real normalised incomplete beta function.

MISSING: transformatio from x to y.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", fisher_f(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_genbeta1.**isf**(*q*)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following a Generalized Beta (Type 1) distribution:

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following a Generalized Beta (Type 2) distribution:

$$\text{isf}_X(\text{prob}) = b \cdot z^{1/a}, \quad \text{where } z = \text{ibetac_inv}(p, q, \text{prob}).$$

MISSING: transformatio from x to y.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_genbeta1.**c_x**(*t*)

Returns $C_X(t)$, the characteristic function of a random variable X, following a Generalized Beta (Type 1) distribution:

$$C_X(t) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", fisher_f(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_genbeta1.**m_x**(*t*)

Returns `NaN`, since the moment generating function does not exist.

dist_genbeta1.**k_x**(*t*, *k=0*)

Returns `NaN`, since the cumulant generating function does not exist.

dist_genbeta1.**moments**(k)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following a Generalized Beta (Type 1) distribution. The rth moments only exists for $-ap < k < \infty$.

$$\mu'_X(k) = \frac{b^k B(p + k/a, q)}{B(p, q)} = \frac{b^k \Gamma(p + k/a)\Gamma(p + q)}{\Gamma(p + q + k/a)\Gamma(p)},$$

See Kleiber, page 231.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", fisher_f(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_genbeta1.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following a Generalized Beta (Type 1) distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", fisher_f(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

4.8.7 Generalized Beta (Type 2) distribution

class ctx.**dist_genbeta2**(a, b, p, q)

where ctx is dec, mpm, ipm, fpm, gmp or arb.

The Generalized Beta (Type 2) distribution distribution is a continuous probability distribution with parameters $a > 0$ and $b > 0$, $p > 0$, $q > 0$, and the support interval $(0, +\infty)$.

See also: Kleiber and Kotz [391] (page 184), Wikipedia [1203].

dist_genbeta2.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a Generalized Beta (Type 2) distribution:

$$\mathrm{pdf}_X(x) = \frac{a x^{ap-1}}{b^{ap} B(p,q)[1 + (x/b)^a]^{p+q}}, \quad x > 0.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 2; x = 3;
>>> print ("pdf: ", fisher_f(mu, sigma).pdf(x))
6.3563523462564525625625625624562356E-20
```

dist_genbeta2.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a Generalized Beta (Type 2) distribution:

$$\mathrm{cdf}_X(x) = I_z(p,q), \quad \text{where } z = \left(\frac{x}{b}\right)^a, \quad x > 0.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 2; x = 3;
>>> print ("cdf: ", fisher_f(mu, sigma).pdf(x))
6.3563523462564525625625625624562356E-20
```

dist_genbeta2.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following a Generalized Beta (Type 2) distribution:

$$\mathrm{sf}_X(x) = 1 - I_z(p,q) = I_{1-z}(p,q), \quad \text{where } z = \left(\frac{x}{b}\right)^a, \quad x > 0.$$

Here ibeta($\cdot$) denotes the real normalised incomplete beta function, and ibetac($\cdot$) denotes the real normalised complementary incomplete beta function. See Kleiber, page 188.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 2; x = 3;
>>> print (" sf: ", fisher_f(mu, sigma).pdf(x))
sf: 6.3563523462564525625625625624562356E-20
```

dist_genbeta2.**qtf**(*q*)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following a Generalized Beta (Type 2) distribution:

$$\text{qtf}_X(\text{prob}) = b \cdot z^{1/a}, \quad \text{where } z = \text{ibeta_inv}(p, q, \text{prob}).$$

Here $\text{ibeta_inv}(\cdot)$ denotes the inverse of the real normalised incomplete beta function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 2; q = 0.3;
>>> print ("qtf: ", fisher_f(mu, sigma).qtf(q))
qtf: 6.356352346256452562562562562456235 6E+00
```

dist_genbeta2.**isf**(*q*)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following a Generalized Beta (Type 2) distribution:

$$\text{isf}_X(\text{prob}) = b \cdot z^{1/a}, \quad \text{where } z = \text{ibetac_inv}(p, q, \text{prob}).$$

Here $\text{ibetac_inv}(\cdot)$ denotes the inverse of the real normalised complementary incomplete beta function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 2; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.356352346256452562562562562456235 6E+00
```

dist_genbeta2.**c_x**(*t*)

Returns $C_X(t)$, the characteristic function of a random variable X, following a Generalized Beta (Type 2) distribution:

$$C_X(t) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 2; t = 0.3;
>>> print ("c_x: ", fisher_f(mu, sigma).c_x(t))
6.356352346256452562562562562456235 6E+00
```

dist_genbeta2.**m_x**(*t*)

Returns `NaN`, since the moment generating function does not exist.

dist_genbeta2.**k_x**(*t*, *k=0*)

Returns `NaN`, since the cumulant generating function does not exist.

dist_genbeta2.**moments**(*k*)

Returns the first j raw moments, $\mu_j, j = 2 \ldots k$, of a random variable X, following a Generalized Beta (Type 2) distribution. The rth moments only exists for $-ap < k < aq$.

$$\mu'_X(k) = \frac{b^k B(p + k/a, q - k/a)}{B(p, q)} = \frac{b^k \Gamma(p + k/a)\Gamma(q - k/a)}{\Gamma(p)\Gamma(q)},$$

See Kleiber, page 188.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 2; k = 6;
>>> print ("saddlepoint: ", fisher_f(mu, sigma).moments(k))
6.3563523462564525625625625624562356E+00
```

`dist_genbeta2.`**`cumulants`**(k)

Returns the first j cumulants, $\kappa_j, j = 2 \ldots k$, of a random variable X, following a Generalized Beta (Type 2) distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 2; k = 6;
>>> print ("saddlepoint: ", fisher_f(mu, sigma).cumulants(k))
6.3563523462564525625625625624562356E+00
```

4.8.8 Generalized logistic distribution (JKB Types I - IV)

class ctx.**dist_genlogistic**(a, b)

where ctx is dec, mpm, ipm, fpm, gmp or arb.

The generalized logistic distribution distribution is a continuous probability distribution with parameters $a > 0$ and $b > 0$, and the support interval $(0, +\infty)$.

See also: Johnson *et al.* [385], Johnson *et al.* [386], Wikipedia [1205].

Type IV is the most general form of the distribution. The Type III distribution can be obtained from Type IV by setting $\beta = \alpha$. The Type II distribution can be obtained from Type IV by setting $\alpha = 1$. The Type I distribution can be obtained from Type IV by setting $\beta = 1$. The logistic distribution is obtained by setting $\alpha = \beta = 1$.

For Type I and Type II, cdf, sf, qtf and isf are availabe in closed form in terms of elementary functions.

For Type III and Type IV, we use the fact that the variable $Z = (\beta/\alpha)\exp(-X)$ has a central F-distribution with $2\alpha, 2\beta$ degrees of freedom (see JKB vol2 2, p.142).

dist_genlogistic.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a generalized logistic (Type IV) distribution:

$$\mathrm{pdf}_X(x) = \frac{1}{B(\alpha,\beta)}\frac{e^{-\beta x}}{(1+e^{-x})^{\alpha+\beta}}, \quad \alpha,\beta > 0.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 2; x = 3;
>>> print ("pdf: ", fisher_f(mu, sigma).pdf(x))
6.35635234625645256256256256245623 56E-20
```

dist_genlogistic.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a generalized logistic distribution:

$$\mathrm{cdf}_X(x) = \frac{1}{(1+e^{-x})^{\alpha}} \quad \text{for Type I,} \quad \text{and } \mathrm{cdf}_X(x) = 1 - \frac{e^{-\beta x}}{(1+e^{-x})^{\alpha}} \quad \text{for Type II.}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 2; x = 3;
>>> print ("cdf: ", fisher_f(mu, sigma).pdf(x))
6.35635234625645256256256256245623 56E-20
```

dist_genlogistic.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following a generalized logistic distribution:

The variable $Z = (\beta/\alpha)\exp(-x)$ has a central F-distribution with $2\alpha, 2\beta$ degrees of freedom (see JKB vol2 2, p.142)

$$\mathrm{sf}_X(x) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 2; x = 3;
>>> print (" sf: ", fisher_f(mu, sigma).pdf(x))
sf: 6.3563523462564525625625625624562356E-20
```

dist_genlogistic.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following a generalized logistic distribution:

The variable $Z = (\beta/\alpha)\exp(-x)$ has a central F-distribution with $2\alpha, 2\beta$ degrees of freedom (see JKB vol2 2, p.142)

$$\text{qtf}_X(q) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 2; q = 0.3;
>>> print ("qtf: ", fisher_f(mu, sigma).qtf(q))
qtf: 6.3563523462564525625625625624562356E+00
```

dist_genlogistic.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following a generalized logistic distribution:

The variable $Z = (\beta/\alpha)\exp(-x)$ has a central F-distribution with $2\alpha, 2\beta$ degrees of freedom (see JKB vol2 2, p.142)

$$\text{isf}_X(q) = ??$$

Here $\text{ibetac_inv}(\cdot)$ denotes the inverse of the real normalised complementary incomplete beta function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 2; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.3563523462564525625625625624562356E+00
```

dist_genlogistic.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following a generalized logistic distribution:

$$C_X(t) = \frac{\Gamma(\beta - it)\Gamma(\alpha + it)}{\Gamma(\alpha)\Gamma(\beta)}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 2; t = 0.3;
>>> print ("c_x: ", fisher_f(mu, sigma).c_x(t))
6.3563523462564525625625625624562356E+00
```

dist_genlogistic.**m_x**(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following a generalized logistic distribution:

$$M_X(t) == \frac{\Gamma(\beta - t)\Gamma(\alpha + t)}{\Gamma(\alpha)\Gamma(\beta)}, \quad -\alpha < t < \beta.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 2; k = 6;
>>> print ("saddlepoint: ", fisher_f(mu, sigma).moments(k))
6.35635234625645256256256256245623 56E+00
```

dist_genlogistic.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following a generalized logistic distribution:

$$K_X(t) = \log(\Gamma(\beta - t)) + \log(\Gamma(\alpha + t)) - \log(\Gamma(\alpha)) - \log(\Gamma(\beta)), \quad -\alpha < t < \beta.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 2; k = 6;
>>> print ("saddlepoint: ", fisher_f(mu, sigma).moments(k))
6.35635234625645256256256256245623 56E+00
```

dist_genlogistic.**moments**(*k*)

Returns the first j raw moments, $\mu_j, j = 2 \ldots k$, of a random variable X, following a generalized logistic distribution. The moments are calculated from the cumulants.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 2; k = 6;
>>> print ("saddlepoint: ", fisher_f(mu, sigma).moments(k))
6.35635234625645256256256256245623 56E+00
```

dist_genlogistic.**cumulants**(*k*)

Returns the first j cumulants, $\kappa_j, j = 2 \ldots k$, of a random variable X, following a generalized logistic distribution. The cumulants are given by

$$\kappa_X(r) = \psi^{r-1}(\alpha) + (-1)^r \psi^{r-1}(\beta)$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 2; k = 6;
>>> print ("saddlepoint: ", fisher_f(mu, sigma).cumulants(k))
6.35635234625645256256256256245623 56E+00
```

4.8.9 Generalized beta-exponential distribution

class ctx.**dist_gen_beta_exp**(a, b)

where ctx is dec, mpm, ipm, fpm, gmp or arb.

The generalized beta-exponential distribution is a continuous probability distribution with parameters $a > 0$ and $b > 0$, and the support interval $(0, +\infty)$.

See also: Wikipedia [1195], Kleiber and Kotz [391] page 184, equ. 6.6, distribution of Y = log(X), Ristić *et al.* [479].

This is the distribution of the generalized logistic distribution, for b = a = 1.

dist_gen_beta_exp.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a generalized beta-exponential distribution:

$$\mathrm{pdf}_X(x) = \frac{ae^{ap(x-\log(b))}}{B(p,q)[1+e^{a(x-\log(b))}]^{p+q}}, \quad -\infty < x < \infty.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", fisher_f(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_gen_beta_exp.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a generalized beta-exponential distribution:

$$\mathrm{cdf}_X(x) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", fisher_f(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_gen_beta_exp.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following a generalized beta-exponential distribution:

$$\mathrm{sf}_X(x) = ??$$

Here ibeta($\cdot$) denotes the real normalised incomplete beta function, and ibetac($\cdot$) denotes the real normalised complementary incomplete beta function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", fisher_f(mu, sigma).pdf(x))
sf: 6.35635234625645256156156145613 56E-20
```

dist_gen_beta_exp.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following a generalized beta-exponential distribution:

$$\text{qtf}_X(q) = ??$$

Here $\text{ibeta_inv}(\cdot)$ denotes the inverse of the real normalised incomplete beta function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", fisher_f(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_gen_beta_exp.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following a generalized beta-exponential distribution:

$$\text{isf}_X(q) = ??$$

Here $\text{ibetac_inv}(\cdot)$ denotes the inverse of the real normalised complementary incomplete beta function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_gen_beta_exp.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following a generalized beta-exponential distribution:

$$C_X(t) = \frac{\Gamma(\beta - it)\Gamma(\alpha + it)}{\Gamma(\alpha)\Gamma(\beta)}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", fisher_f(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_gen_beta_exp.**m_x**(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following a generalized beta-exponential distribution:

$$M_X(t) = b^t \frac{\Gamma(p + t/a)\Gamma(q - t/a)}{\Gamma(p)\Gamma(q)}, \quad -p < t < q.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 2; k = 6;
>>> print ("saddlepoint: ", fisher_f(mu, sigma).moments(k))
6.35635234625645256256256256245623 56E+00
```

dist_gen_beta_exp.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following a generalized beta-exponential distribution:

$$K_X(t) = \log(\Gamma(\beta - t)) + \log(\Gamma(\alpha + t)) - \log(\Gamma(\alpha)) - \log(\Gamma(\beta)), \quad -\alpha < t < \beta.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 2; k = 6;
>>> print ("saddlepoint: ", fisher_f(mu, sigma).moments(k))
6.35635234625645256256256245623 56E+00
```

dist_gen_beta_exp.**moments**(*k*)

Returns the first j raw moments, $\mu_j, j = 2 \ldots k$, of a random variable X, following a generalized beta-exponential distribution. The moments are calculated from the cumulants.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", fisher_f(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_gen_beta_exp.**cumulants**(*k*)

Returns the first j cumulants, $\kappa_j, j = 2 \ldots k$, of a random variable X, following a generalized beta-exponential distribution. The cumulants are given by

$$\kappa_X(r) = \psi^{r-1}(\alpha) + (-1)^r \psi^{r-1}(\beta)$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", fisher_f(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

4.8.10 Feller-Pareto distribution

class ctx.**dist_feller_pareto**(a, b)

where ctx is dec, mpm, ipm, fpm, gmp or arb.

The Feller-Pareto distribution is a continuous probability distribution with parameters $a > 0$ and $b > 0$, and the support interval $(0, +\infty)$.

The Feller-Pareto distribution is defined as the distribution of a random variable X with

$$X = \mu + \theta \left(\frac{U}{V}\right)^{1/\gamma}, \quad \gamma, \theta > 0, \mu \in \mathbb{R},$$

where U and V are two independent gamma distributions with shape parameter $\tau > 0$ and $\alpha > 0$, respectively, and common scale parameter 1.

See also: Wikipedia [1197], Dutang *et al.* [293].

For $\mu = \theta, \gamma = \tau = 1$ we obtain the Pareto Type I distribution.

For $\gamma = \tau = 1$ we obtain the Pareto Type II distribution. When $\mu = 0$, we obtain what is generally simply called the Pareto distribution.

For $\alpha = \tau = 1$, we obtain the Pareto Type III distribution.

For $\tau = 1$ we obtain the Pareto Type IV distribution.

For $\mu = 0$, this reduces to the four parameter generalized beta of the second kind distribution (see GB2), with $\text{pdf}_X(x) = f(a, b, p, q)$ (McDonald 1984), where $a = \theta, b = \gamma, p = \tau, q = \alpha$.

dist_feller_pareto.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a Feller-Pareto distribution:

$$\text{pdf}_X(x) = \frac{\gamma \cdot ((x-\mu)/\theta)^{\gamma\tau - 1}}{\theta B(\alpha, \tau)[1 + ((x-\mu)/\theta)^{\gamma}]^{\alpha+\tau}} = \frac{\gamma u^{\tau}(1-u)^{\alpha}}{(x-\mu)B(\alpha,\tau)}, \quad \text{where } u = \frac{y}{1+y}, y = \left(\frac{x-\mu}{\theta}\right)^{\gamma}, \quad x \geq \mu.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", fisher_f(mu, sigma).pdf(x))
6.35635234625645256156156145613356E-20
```

dist_feller_pareto.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a Feller-Pareto distribution:

$$\text{cdf}_X(x) = I(\tau, \alpha; u), \quad \text{where } u = \frac{y}{1+y}, y = \left(\frac{x-\mu}{\theta}\right)^{\gamma}, \quad x \geq \mu.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", fisher_f(mu, sigma).pdf(x))
6.35635234625645256156156145613356E-20
```

dist_feller_pareto.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following a Feller-Pareto distribution:

$$\mathrm{sf}_X(x) = 1 - I(\tau, \alpha; u), \quad \text{where } u = \frac{y}{1+y}, y = \left(\frac{x-\mu}{\theta}\right)^{\gamma}, \quad x \geq \mu.$$

Here $\mathrm{ibeta}(\cdot)$ denotes the real normalised incomplete beta function, and $\mathrm{ibetac}(\cdot)$ denotes the real normalised complementary incomplete beta function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", fisher_f(mu, sigma).pdf(x))
sf: 6.356352346256452561561561561456 1356E-20
```

dist_feller_pareto.**qtf**(q)

Returns $\mathrm{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following a Feller-Pareto distribution:

$$\mathrm{qtf}_X(q) = ??$$

Here $\mathrm{ibeta_inv}(\cdot)$ denotes the inverse of the real normalised incomplete beta function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", fisher_f(mu, sigma).qtf(q))
qtf: 6.356352346256452561561561561456 1356E+00
```

dist_feller_pareto.**isf**(q)

Returns $\mathrm{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following a Feller-Pareto distribution:

$$\mathrm{isf}_X(q) = ??$$

Here $\mathrm{ibetac_inv}(\cdot)$ denotes the inverse of the real normalised complementary incomplete beta function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.356352346256452561561561561456 1356E+00
```

dist_feller_pareto.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following a Feller-Pareto distribution:

$$C_X(t) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", fisher_f(mu, sigma).c_x(t))
6.356352346256452561561561561456 1356E+00
```

dist_feller_pareto.**m_x**(*t*)

Returns NaN, since the moment generating function does not exist.

dist_feller_pareto.**k_x**(*t*, *k=0*)

Returns NaN, since the cumulant generating function does not exist.

dist_feller_pareto.**moments**(*k*)

Returns the first j raw moments, $\mu_j, j = 1 \dots k$, of a random variable X, following a Feller-Pareto distribution. The kth moments only exists for $k < \alpha\gamma$.

$$\mu'_X(k) = \sum_{j=0}^{k} \binom{k}{j} \frac{\mu^{k-j}\theta^j \Gamma(\tau + j/\gamma)\Gamma(\alpha - j/\gamma)}{\Gamma(\alpha)\Gamma(\tau)}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", fisher_f(mu, sigma).moments(k))
6.356352346256452561561561561456135 6E+00
```

dist_feller_pareto.**cumulants**(*k*)

Returns the first j cumulants, $\kappa_j, j = 1 \dots k$, of a random variable X, following a Feller-Pareto distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", fisher_f(mu, sigma).cumulants(k))
6.356352346256452561561561561456135 6E+00
```

4.8.11 Fisher z distribution

class ctx.**dist_fisher_z**(m, n)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The Fisher z-distribution is a continuous probability distribution with $m > 0$ and $n > 0$ degrees of freedom, and the support interval $(-\infty, +\infty)$. A random variable X follows a Fisher z-distribution with m and n degrees of freedom if it is defined as $X = \frac{1}{2}\log(Y)$, where Y follows a Fisher F-distribution with m and n degrees of freedom. The Fisher z-distribution is always unimodal, asymmetrical if $m \neq n$, and symmetrical if $m = n$. Interchanging m and n is the same as replacing z with $-z$. The mode is at 0.

See also Wikipedia [1146], MathWorld [795], BoostMath [56], Witkovský [1459], R (Statistical System) [521], Abramowitz and Stegun. [3], Butler and Paolella [166], Chattamvelli and Jones [175], Witkovský [1453].

See also: https://projecteuclid.org/journals/annals-of-mathematical-statistics/volume-12/issue-4/A-Study-of-R-A-Fishers-z-Distribution-and-the/10.1214/aoms/1177731681.full

A Study of R. A. Fisher's z Distribution and the Related F Distribution. Leo A. Aroian. Ann. Math. Statist. 12(4): 429-448 (December, 1941). DOI: 10.1214/aoms/1177731681

dist_fisher_z.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a Fisher z distribution:

$$\text{pdf}_X(x) = 2e^{2x} f_{\text{FisherF}}(e^{2x}; m, n),$$

where $f_{\text{FisherF}}(\cdot, m, n)$ is the pdf of the Fisher F-distribution with m and n degrees of freedom.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", fisher_f(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_fisher_z.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a Fisher z distribution:

$$\text{cdf}_X(x) = F_{\text{FisherF}}(e^{2x}; m, n),$$

where $F_{\text{FisherF}}(\cdot, m, n)$ is the cdf of the Fisher F-distribution with m and n degrees of freedom.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", fisher_f(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_fisher_z.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function (sf) of a random variable X, following a Fisher z distribution:

$$\text{sf}_X(x) = F_{\text{FisherF}}(e^{-2x}; n, m),$$

where $F_{\text{FisherF}}(\cdot, n, m)$ is the cdf of the Fisher F-distribution with n and m degrees of freedom.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", fisher_f(mu, sigma).pdf(x))
sf: 6.3563523462564525615615615614561356E-20
```

`dist_fisher_z.qtf(`q`)`

Returns $\text{qtf}_X(q)$, the quantile function (qtf) of a random variable X, following a Fisher z distribution:

$$\text{qtf}_X(q) = \tfrac{1}{2}\log\left(F^{-1}_{\text{FisherF}}(q;m,n)\right),$$

where $F^{-1}_{\text{FisherF}}(\cdot,m,n)$ is the qtf of the Fisher F-distribution with m and n degrees of freedom.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", fisher_f(mu, sigma).qtf(q))
qtf: 6.3563523462564525615615615614561356E+00
```

`dist_fisher_z.isf(`q`)`

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following a Fisher z distribution:

$$\text{isf}_X(q) = -\tfrac{1}{2}\log\left(F^{-1}_{\text{FisherF}}(q;n,m)\right),$$

where $F^{-1}_{\text{FisherF}}(\cdot,n,m)$ is the qtf of the Fisher F-distribution with n and m degrees of freedom.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.3563523462564525615615615614561356E+00
```

`dist_fisher_z.c_x(`t`)`

Returns $C_X(t)$, the characteristic function of a random variable X, following a Fisher z distribution:

$$C_X(t) = \left(\frac{n}{m}\right)^{it/2} \frac{\Gamma\left(\frac{1}{2}(n-it)\right)\Gamma\left(\frac{1}{2}(m+it)\right)}{\Gamma\left(\frac{1}{2}n\right)\Gamma\left(\frac{1}{2}m\right)}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.3563523462564525615615615614561356E+00
```

`dist_fisher_z.m_x(`t`)`

Returns the moment generating function of a random variable X, following a Fisher z distribution.

$$M_X(t) = \left(\frac{n}{m}\right)^{t/2} \frac{\Gamma\left(\frac{1}{2}(n-t)\right)\Gamma\left(\frac{1}{2}(m+t)\right)}{\Gamma\left(\frac{1}{2}n\right)\Gamma\left(\frac{1}{2}m\right)}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.356352346256452561561561456135 6E+00
```

dist_fisher_z.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function, and its j^{th} derivatives, $K_X^{(j)}(t), j = 1 \ldots k$, of a random variable X, following a Fisher z distribution.

$$K_X(t) = \log\left(\Gamma\left(\tfrac{1}{2}(n-t)\right)\right) + \log\left(\Gamma\left(\tfrac{1}{2}(m+t)\right)\right) + \tfrac{1}{2}t\left(\log(n) - \log(m)\right) - \log\left(\Gamma\left(\tfrac{1}{2}n\right)\right) - \log\left(\Gamma\left(\tfrac{1}{2}m\right)\right).$$

$$K_X^{(1)}(t) = \tfrac{1}{2}\left(-\psi^{(0)}\left(\tfrac{1}{2}n - t\right) + \psi^{(0)}\left(\tfrac{1}{2}m + t\right)\right) + \tfrac{1}{2}\left(\log(n) - \log(m)\right),$$

$$K_X^{(j)}(t) = 2^{-j}\left((-1)^j\psi^{(j-1)}\left(\tfrac{1}{2}n - t\right) + \psi^{(j-1)}\left(\tfrac{1}{2}m + t\right)\right), \quad j \geq 2,$$

where $\psi^{(r)}(\cdot)$ is the polygamma function of order r.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.356352346256452561561561456135 6E+00
```

dist_fisher_z.**moments**(*k*)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following a Fisher z distribution. The moments are calculated from the cumulants.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.356352346256452561561561456135 6E+00
```

dist_fisher_z.**cumulants**(*k*)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following a Fisher z distribution.

$$\kappa_1 = \tfrac{1}{2}\left(-\psi^{(0)}\left(\tfrac{1}{2}n\right) + \psi^{(0)}\left(\tfrac{1}{2}m\right)\right) + \tfrac{1}{2}\left(\log(n) - \log(m)\right),$$

$$\kappa_r = 2^{-r}\left((-1)^r\psi^{(r-1)}\left(\tfrac{1}{2}n\right) + \psi^{(r-1)}\left(\tfrac{1}{2}m\right)\right), \quad r \geq 2,$$

where $\psi^{(r)}(\cdot)$ is the polygamma function of order r.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.356352346256452561561561456135 6E+00
```

Aroian gives the following approximations for the cumulants, for $n \geq 2, m \geq 2$:

$$\kappa_1 \approx \frac{1}{2}\left(\frac{1}{n} - \frac{1}{m}\right) + \frac{1}{6}\left(\frac{1}{n^2} - \frac{1}{m^2}\right) - \frac{1}{15}\left(\frac{1}{n^4} - \frac{1}{m^4}\right) + \frac{8}{63}\left(\frac{1}{n^6} - \frac{1}{m^6}\right),$$

$$\kappa_r \approx \frac{(r-2)!}{2}\left(\frac{n+r-1}{n^r}+(-1)^r\frac{m+r-1}{m^r}\right)+\frac{r!}{6}\left(\frac{1}{n^{r+1}}+\frac{(-1)^r}{m^{r+1}}\right)-\frac{(r+2)!}{90}\left(\frac{1}{n^{r+3}}+\frac{(-1)^r}{m^{r+3}}\right), \quad r \geq 2.$$

Approximations

`ctx.`**`fisher_z_ecf`**`(`*x*, *m*, *n*, *results='cdf'*`)`

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Calculates the Edgeworth approximation to the pdf, cdf and sf.

`ctx.`**`fisher_z_ecf_inv`**`(`*q*, *m*, *n*, *results='qtf'*`)`

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Calculates the Cornish-Fisher approximation to the qtf and isf.

`ctx.`**`fisher_z_spa`**`(`*x*, *n*, *results='c'*`)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Calculates the Luggannini-Rice saddlepoint approximation of the pdf, cdf and sf.

`ctx.`**`fisher_z_spa_inv`**`(`*x*, *n*, *results='qtf'*`)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Calculates the inverse Jensen saddlepoint approximation of the qtf and isf.

4.8.12 Skew t-distribution (Jones)

class ctx.**dist_skewt**(a, b)

where ctx is dec, mpm, ipm, fpm, gmp or arb.

The skew-t-distribution is a continuous probability distribution with parameters $a > 0$ and $b > 0$, and the support interval $(-\infty, +\infty)$.

See also: Jones and Faddy [388].

Other skew t-distributions: see downloads.

dist_skewt.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a skew-t-distribution:

$$\mathrm{pdf}_X(x) = \frac{1}{2^{a+b-1}B(a,b)\sqrt{a+b}} \times \left(1 + \frac{x}{\sqrt{a+b+x^2}}\right)^{a+1/2} \times \left(1 - \frac{x}{\sqrt{a+b+x^2}}\right)^{b+1/2}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", fisher_f(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_skewt.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a skew-t-distribution:

$$\mathrm{cdf}_X(x) = I_z(a,b), \quad \text{where } z = \frac{1}{2}\left(1 + \frac{x}{\sqrt{a+b+x^2}}\right)$$

Here ibeta$(\cdot)$ denotes the real normalised incomplete beta function, and ibetac$(\cdot)$ denotes the real normalised complementary incomplete beta function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", fisher_f(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_skewt.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following a skew-t-distribution:

$$\mathrm{sf}_X(x) = 1 - I_z(a,b), \quad \text{where } z = \frac{1}{2}\left(1 + \frac{x}{\sqrt{a+b+x^2}}\right)$$

Here ibeta$(\cdot)$ denotes the real normalised incomplete beta function, and ibetac$(\cdot)$ denotes the real normalised complementary incomplete beta function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", fisher_f(mu, sigma).pdf(x))
sf: 6.35635234625645256156156145613 56E-20
```

dist_skewt.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following a skew-t-distribution:

$$\text{qtf}_X(q) = \frac{\sqrt{a+b}(2Y-1)}{2\sqrt{Y(1-Y)}},$$

where Y is the quantile of the beta distribution. Here $\text{ibeta_inv}(\cdot)$ denotes the inverse of the real normalised incomplete beta function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", fisher_f(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_skewt.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following a skew-t-distribution:

$$\text{isf}_X(q) = \frac{\sqrt{a+b}(2Y-1)}{2\sqrt{Y(1-Y)}},$$

where Y is the quantile of the beta distribution. Here $\text{ibeta_inv}(\cdot)$ denotes the inverse of the real normalised incomplete beta function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_skewt.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following a skew-t-distribution:

$$C_X(t) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", fisher_f(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_skewt.**m_x**(t)

Returns NaN, since the moment generating function does not exist.

dist_skewt.**k_x**(t, *k=0*)

Returns NaN, since the cumulant generating function does not exist.

dist_skewt.**moments**(k)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following a skew-t-distribution. The rth moments only exists for $a > r/2$ and $b > r/2$.

$$\mu'_X(r) = \frac{(a+b)^{r/2}}{B(a,b)} \sum_{i=0}^{r} \binom{r}{i} 2^{-i} (-1)^i B\left(a + \frac{r}{2} - i, b - \frac{r}{2}\right)$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", fisher_f(mu, sigma).moments(k))
6.356352346256452561561561561456135 6E+00
```

dist_skewt.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following a skew-t-distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", fisher_f(mu, sigma).cumulants(k))
6.356352346256452561561561561456135 6E+00
```

4.8.13 Pearson's rho distribution (under H_0)

class ctx.**dist_pearson_rho**(N)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The distribution of Pearson's rho (under H_0) with sample size $N \geq 3$, ie. the distribution of the sample correlation coefficient when $\rho = 0$), is a continuous distribution with the support interval $(-1, +1)$.

See also: Wikipedia [1221], Johnson *et al.* [386] page 550.

See also Johnson II, page 550, for characteristic function and mgf.

dist_pearson_rho.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following the distribution of Pearson's rho (under H_0):

$$\text{pdf}_X(x) = \frac{(1-r^2)^{\frac{N-4}{2}}}{B\left(\frac{1}{2}, \frac{N-2}{2}\right)},$$

where $B(a, b)$ is the beta function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", pearson_rho(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_pearson_rho.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following the distribution of Pearson's rho (under H_0):

$$\text{cdf}_X(r) = F_{\text{StudentT}}(t, N-2), \quad \text{where } t = r\sqrt{\frac{N-2}{1-r^2}},$$

and $F_{\text{StudentT}}(t, N-2,)$ is the cdf of the t-distribution with $N-2$ degrees of freedom.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", pearson_rho(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_pearson_rho.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function (sf) of a random variable X, following the distribution of Pearson's rho (under H_0):

$$\text{sf}_X(r) = F_{\text{StudentT}}(-t, N-2), \quad \text{where } t = r\sqrt{\frac{N-2}{1-r^2}},$$

and $F_{\text{StudentT}}(t, N-2,)$ is the cdf of the t-distribution with $N-2$ degrees of freedom.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", pearson_rho(mu, sigma).pdf(x))
sf: 6.35635234625645256156156145613 56E-20
```

dist_pearson_rho.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following the distribution of Pearson's rho (under H_0):

$$\text{qtf}_X(q) = \frac{t_{\alpha,N-2}}{\sqrt{N-2+t_{\alpha,N-2}^2}},$$

where $t_{\alpha,N-2}$ is the quantile function of the central t-distribution with $N-2$ degrees of freedom.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", pearson_rho(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_pearson_rho.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following the distribution of Pearson's rho (under H_0):

$$\text{isf}_X(q) = \frac{-t_{\alpha,N-2}}{\sqrt{N-2+t_{\alpha,N-2}^2}},$$

where $t_{\alpha,N-2}$ is the quantile function of the central t-distribution with $N-2$ degrees of freedom.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", pearson_rho(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_pearson_rho.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following the distribution of Pearson's rho (under H_0):

$$C_X(t) = \Gamma(\tfrac{1}{2}(N-1)) \cdot 2^{(N-3)/2} \cdot t^{-(N-3)/2} \cdot J_{(N-3)/2}(t),$$

where $J_\nu(t)$ is the Bessel function of the first kind of order ν.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", pearson_rho(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_pearson_rho.**m_x**(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following the distribution of Pearson's rho (under H_0):

$$M_X(t) = \Gamma(\tfrac{1}{2}(N-1)) \cdot 2^{(N-3)/2} \cdot t^{-(N-3)/2} \cdot I_{(N-3)/2}(t),$$

where $I_\nu(t)$ is the modified Bessel function of the second kind of order ν.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", pearson_rho(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_pearson_rho.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following the distribution of Pearson's rho (under H_0):

$$K_X(t) = \log\left(\Gamma(\tfrac{1}{2}(N-1)) \cdot 2^{(N-3)/2} \cdot t^{-(N-3)/2} \cdot I_{(N-3)/2}(t)\right),$$

where $I_\nu(t)$ is the modified Bessel function of the second kind of order ν.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", pearson_rho(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

dist_pearson_rho.**moments**(*k*)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following the distribution of Pearson's rho (under H_0):

All odd moments are zero. For the even moments we have

$$\mu_X(r) = \tfrac{1}{2} B\left(\tfrac{1}{2}(r+1), \tfrac{1}{2}(N-2)\right)$$

where $B(a, b)$ is the beta function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", pearson_rho(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_pearson_rho.**cumulants**(*k*)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following the distribution of Pearson's rho (under H_0). The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", pearson_rho(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

4.9 Noncentral distributions

4.9.1 Boost: Noncentral χ^2 distribution

The following functions return the pdf, cdf, qtf or boost class of the noncentral chi-squared distribution with degrees of freedom $n > 0$, noncentrality parameter λ_1, and support interval $(0, +\infty)$.

See also Wikipedia [1159], MathWorld [804], Patnaik [462], Penev and Raykov [464], Wang and Gray [789], Winterbottom [1447], BoostMath [64], Johansson [384].

`math53.chi2_nc_pdf(`*n*, *lambda1*, *x*`)`

Returns pdf(x), the value of the probability density function (*Pdf*) of the noncentral chi-squared distribution:

$$\text{pdf}(x) = f_{\chi^2}(n, x; \lambda_1) = \frac{1}{2} e^{-(x+\lambda)/2} \left(\frac{x}{\lambda}\right)^{k/4-1/2} I_{k/2-1}(\sqrt{\lambda x}) \tag{4.9}$$

where $I_k(y)$ is a modified Bessel function of the first kind of order k.

Alternatively, the pdf can be written in a form which shows the relationship to the central distribution more clearly:

$$\text{pdf}(x) = f_{\chi^2}(n, x; \lambda_1) = f_{\chi^2}(x, n) \times e^{-\lambda_1/2} \times {}_0F_1\left(-; \frac{n}{2}; \frac{x\lambda_1}{4}\right). \tag{4.10}$$

Here $f_{\chi^2}(\cdot)$ is the PDF of the central chi-square distribution, and ${}_0F_1(\cdot)$ is the confluent hypergeometric limit function.

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("Chi2NcPdf(x, a, b): ", Chi2NcPdf(x, a, b))
>>> print ("dist_chi_squared_nc(a, b).pdf(x): ", dist_chi_squared_nc(a, b).pdf(x))
6.35635234625645256156156145614561356E+00
```

`math53.chi2_nc_cdf(`*n*, *lambda1*, *x*`)`

Returns cdf(x), the value of the cumulative distribution function (*Cdf*) of the noncentral chi-squared distribution:

$$\text{cdf}(x) = F_{\chi^2}(n, x; \lambda) = \int_0^x f_{\chi^2}(n, x; \lambda_1)\, \mathrm{d}t.$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("Chi2NcCdf(x, a, b): ", Chi2NcCdf(x, a, b))
>>> print ("dist_chi_squared_nc(a, b).cdf(x): ", dist_chi_squared_nc(a, b).cdf(x))
6.35635234625645256156156145614561356E+00
```

`math53.chi2_nc_qtf(`*n*, *lambda1*, *q*`)`

where `Ctx` is `Math53` or `CtxBoost`.

Returns qtf(q), the value of the quantile function (*Qtf*) of the noncentral chi-squared distribution:

There is no known closed exact form for qtf(q). The default method is to call the function provided by Boost.

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("Chi2NcQtf(q, a, b): ", Chi2NcQtf(q, a, b))
>>> print ("dist_chi_squared_nc(a, b).qtf(q): ", dist_chi_squared_nc(a, b).qtf(q))
6.35635234625645256156156145613 56E+00
```

class ctx.**dist_chi2_nc**(*n*, *lambda1*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The noncentral chi-square distribution is a continuous probability distribution with degrees of freedom $n > 0$, noncentrality parameter λ_1, and support interval $(0, \infty)$. See also Wikipedia [1159], MathWorld [804], Patnaik [462], Penev and Raykov [464], Wang and Gray [789], Winterbottom [1447], BoostMath [64], Witkovský [1467], Johansson [384], R (Statistical System) [514], Yu [1491].

dist_chi_squared_nc.**pdf**(*x*)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a non-central chi-squared distribution:

$$\text{pdf}_X(x) = f_{\chi^2}(n, x; \lambda) = e^{-\lambda/2} f_{\chi^2}(n, x) {}_0F_1\left(-; \frac{n}{2}; \frac{x\lambda}{4}\right),$$

Here $f_{\chi^2}(\cdot)$ and $F_{\chi^2}(\cdot)$ are the PDF and CDF, respectively, of the central chi-square distribution, and ${}_0F_1(\cdot)$ is the confluent hypergeometric limit function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", chi_squared_nc(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_chi_squared_nc.**cdf**(*x*)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a non-central chi-squared distribution:

$$\text{cdf}_X(x) = \int_0^x \text{pdf}_X(x)\mathrm{d}t = F_{\chi^2}(n, x; \lambda) = e^{-\lambda/2} \sum_{j=0}^{\infty} \frac{(\lambda/2)^j}{j!} F_{\chi^2}(n + 2 + j, x),$$

Here $f_{\chi^2}(\cdot)$ and $F_{\chi^2}(\cdot)$ are the PDF and CDF, respectively, of the central chi-square distribution, and ${}_0F_1(\cdot)$ is the confluent hypergeometric limit function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", chi_squared_nc(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_chi_squared_nc.**sf**(*x*)

Returns $\text{sf}_X(x)$, the survival function (sf) of a random variable X, following a non-central chi-squared distribution:

$$\text{sf}_X(x) = 1 - \text{cdf}_X(x) = \int_x^{\infty} \text{pdf}_X(x)\mathrm{d}t.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", chi_squared_nc(mu, sigma).pdf(x))
sf: 6.3563523462564525615615615614561356E-20
```

dist_chi_squared_nc.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following a non-central chi-squared distribution:

There is no known closed form for the quantile function $\text{cdf}_X^{-1}(q)$: It is computed with Newton iterations where the starting values are from a central chi-square approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", chi_squared_nc(mu, sigma).qtf(q))
qtf: 6.3563523462564525615615615614561356E+00
```

dist_chi_squared_nc.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following a non-central chi-squared distribution:

$$\text{isf}_X(q) = \text{qtf}_X(1-q) = \text{cdf}_X^{-1}(1-q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", chi_squared_nc(mu, sigma).isf(q))
6.3563523462564525615615615614561356E+00
```

dist_chi_squared_nc.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following a non-central chi-squared distribution:

$$C_X(t) = \exp\left(\frac{i\lambda t}{1-2it}\right)(1-2it)^{-n/2}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared_nc(mu, sigma).c_x(t))
6.3563523462564525615615615614561356E+00
```

dist_chi_squared_nc.**m_x**(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following a non-central chi-squared distribution:

$$M_X(t) = \exp\left(\frac{\lambda t}{1-2t}\right)(1-2t)^{-n/2}, \quad t \in \left(-\infty, \tfrac{1}{2}\right),$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared_nc(mu, sigma).c_x(t))
6.3563523462564525615615615614561356E+00
```

dist_chi_squared_nc.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function, and its j^{th} derivatives, $K_X^{(j)}(t), j = 1 \dots k$, of a random variable X, following a non-central chi-squared distribution:

$$K_X(t) = -\frac{n}{2}\log(1-2t) + \frac{\lambda t}{1-2t}, \quad t \in \left(-\infty, \tfrac{1}{2}\right),$$

$$K_X^{(j)}(t) = \frac{2^{j-1}(j-1)!}{(1-2t)^j}\left[n + \frac{\lambda j}{1-2t}\right].$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", chi_squared_nc(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

dist_chi_squared_nc.**moments**(*k*)

Returns the first j raw moments, $\mu_j, j = 1 \dots k$, of a random variable X, following a non-central chi-squared distribution: the moments are calculated from the cumulants.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", chi_squared_nc(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_chi_squared_nc.**cumulants**(*k*)

Returns the first j cumulants, $\kappa_j, j = 1 \dots k$, of a random variable X, following a non-central chi-squared distribution:

$$\kappa_r = 2^{r-1}(r-1)!(n + r\lambda)$$

```
def MakeNoncentralChiSquaredCumulants(self):
    df = iv.mpf(2000)
    lambda_ = 33
    k = 10
    kappa = iv.matrix(k+1, 1)
    kappa[0] = 1
    kappa[1] = df + lambda_
    for i in range(2, k+1):
        kappa[i] = kappa[i - 1] * 2 * (i - 1) * (1 + lambda_ / (df + (i - 1) * lambda_))
    return kappa
```

Recurrences: Non-central Chi-square

ctx.**chi_squared_nc_recurrence**(*x*, *n*, *lambda*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

The following recurrence relations hold for the pdf and CDF (see Cohen [183]):

$$f_{\chi^2}(n+4, x; \lambda) = \frac{x \cdot f_{\chi^2}(n, x; \lambda) - n \cdot f_{\chi^2}(n+2, x; \lambda)}{\lambda}$$

$$F_{\chi^2}(n, x; \lambda) - F_{\chi^2}(n+2, x; \lambda) = 2 f_{\chi^2}(n+2, x; \lambda)$$

$$F_{\chi^2}(n, x; \lambda) - F_{\chi^2}(n-2, x; \lambda) = 2\frac{\partial}{\partial \lambda} F_{\chi^2}(n-2, x; \lambda)$$

Ref:

Pav 2015: Moments of log noncentral chisquare

Yu 2011: mode of noncentral chi-square

Approximations

`ctx.chi_squared_nc_gp`(*x*, *n*, *lambda*, *results='cdf'*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Calculates the pdf, cdf and sf from the characteristic function using the procedure of Gil-Pelaez (see *gil_pelaez_pdf()* and *gil_pelaez_cdf()*).

`ctx.chi_squared_nc_ecf`(*x*, *f*, *lambda1*, *results='cdf'*)

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Calculates the Edgeworth approximation to the pdf, cdf and sf.

`ctx.chi_squared_nc_ecf_inv`(*q*, *f*, *lambda1*, *results='qtf'*)

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Calculates the Cornish-Fisher approximation to the qtf and isf.

`ctx.chi_squared_nc_spa`(*x*, *n*, *lambda*, *results='cdf'*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Calculates the Luggannini-Rice saddlepoint approximation of the pdf.

The solution $\hat{s}(x)$ of the saddlepoint equation $K_X^{(1)}(\hat{s}(x)) = x$, of a random variable X, following a non-central chi-squared distribution is given by:

$$\hat{s}(x) = -\frac{1}{4x}\left[n - 2x + \sqrt{n^2 + 4x\lambda}\right], \quad x > 0$$

```
def NonCentralChi2_SPA2(self, n0, x0, lambda0_):
    n = iv.mpf(n0)
    x = iv.mpf(x0)
    lambda_ = iv.mpf(lambda0_)
    s = -(1 / (4 * x)) * (n - 2 * x + iv.sqrt(n * n + 4 * x * lambda_))
    Order = 18
    kderiv = iv.matrix(Order+2, 1)
    for j in range(0, Order+1):
        kderiv[j] = self.NonCentralChi2_CGF_Derivative(s, n, lambda_, j)

    LeftTail, RightTail = self.LugannaniRice(Order, kderiv, s)
    return LeftTail, RightTail
```

The following code tests the procedure

```
def LugannaniRiceDemo(self):
    nu = 40.0
    x = 61.0
    nc = 70.0
    LeftTail, RightTail = self.NonCentralChi2_SPA2(nu, x, nc)
    print("LeftTail:  ", LeftTail)
    print("RightTail: ", RightTail)
```

`ctx.chi_squared_nc_spa_inv`(*x*, *n*, *lambda*, *results='qtf'*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Calculates the inverse Jensen saddlepoint approximation of the qtf and isf.

4.9.2 Boost: Noncentral Student t distribution

The following functions return the pdf, cdf, qtf or boost class of the non-central Student t distribution with $n > 0$ degrees of freedom, noncentrality parameter δ, and support interval $(-\infty, +\infty)$.

See also Wikipedia [1160], MathWorld [806], BoostMath [66], Benton and Krishnamoorthy [30], Broda and Paolella [160], Owen [452], Wang and Gray [789], Witkovský [1454], Johansson [384].

`math53.student_t_nc_pdf`(*n*, *delta*, *x*)

Returns pdf(x), the value of the probability density function (*Pdf*) of the non-central Student t distribution:

$$\text{pdf}(x) = f_{\text{StudentT}}(n, x, \delta) = \int_0^\infty \phi\left(x\sqrt{\frac{y}{n}} - \delta\right) f_{\chi^2}(y, n)\sqrt{\frac{y}{n}}\,\mathrm{d}y, \tag{4.11}$$

where $\phi(\cdot)$ denotes the pdf of the standard normal distribution and $f_{\chi^2}(\cdot, n)$ denotes the pdf of the χ^2 distribution with n degrees of freedom (see *chi_squared_pdf()*).

Alternatively, the pdf can be written in a form which shows the relationship to the central distribution more clearly:

$$\text{pdf}(x) = f_{t'}(x; n, \delta) = \frac{n^m \Gamma(n+1)\exp(-\frac{1}{2}\delta^2)}{2^n a^m \Gamma(m)}\left[\frac{\sqrt{2}\delta x \cdot {}_1F_1(m+1; \frac{3}{2}; y^2)}{a\Gamma(m+\frac{1}{2})} - \frac{{}_1F_1(m+\frac{1}{2}; \frac{1}{2}; y^2)}{\sqrt{a}\Gamma(m+1)}\right], \tag{4.12}$$

$$m = \frac{n}{2}, \quad a = n + x^2, \quad y^2 = \frac{\delta^2 x^2}{2a},$$

and ${}_1F_1(\cdot)$ is the confluent hypergeometric function.

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("StudentTNcPdf(x, a, b): ", StudentTNcPdf(x, a, b))
>>> print ("dist_student_t_nc(a, b).pdf(x): ", dist_student_t_nc(a, b).pdf(x))
6.35635234625645256156156145614561356E+00
```

`math53.student_t_nc_cdf`(*n*, *delta*, *x*)

Returns cdf(x), the value of the cumulative distribution function (*Cdf*) of the non-central Student t distribution:

$$\text{cdf}(x) = F_{\text{StudentT}}(x, n, \delta) = \int_0^\infty \Phi\left(x\sqrt{\frac{y}{n}} - \delta\right) f_{\chi^2}(y, n)\,\mathrm{d}y, \tag{4.13}$$

for $x < 0$ by $F_{\text{StudentT}}(n, x, \delta) = 1 - F_{\text{StudentT}}(n, -x, -\delta)$, and for $x = 0$ by $F_{\text{StudentT}}(n, x, \delta) = \Phi(-\delta)$.

Here $\Phi(\cdot)$ denotes the cdf of the standard normal distribution and $f_{\chi^2}(\cdot, n)$ denotes the pdf of the χ^2 distribution with n degrees of freedom.

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("StudentTNcCdf(x, a, b): ", StudentTNcCdf(x, a, b))
>>> print ("dist_student_t_nc(a, b).cdf(x): ", dist_student_t_nc(a, b).cdf(x))
6.35635234625645256156156145614561356E+00
```

math53.**student_t_nc_qtf**(*n*, *delta*, *q*)

Returns qtf(q), the value of the quantile function (*Qtf*) of the non-central Student t distribution:

There is no known closed exact form for qtf(q). For `fpm.` the default method is to call the function provided by Boost.

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("StudentTNcQtf(q, a, b): ", StudentTNcQtf(q, a, b))
>>> print ("dist_student_t_nc(a, b).qtf(q): ", dist_student_t_nc(a, b).qtf(q))
6.3563523462564525615615615614561356E+00
```

class ctx.**dist_student_t_nc**(*n*, *lambda1*)

The noncentral t distribution is a continuous probability distribution with degrees of freedom $n > 0$, noncentrality parameter δ, and support interval $(-\infty, +\infty)$. See also Wikipedia [1160], MathWorld [806], BoostMath [66], Benton and Krishnamoorthy [30], Broda and Paolella [160], Owen [452], Wang and Gray [789], Witkovský [1454], Johansson [384], R (Statistical System) [516].

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.nctdtr.html#scipy.special.nctdtr

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.nctdtridf.html#scipy.special.nctdtridf

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.nctdtrit.html#scipy.special.nctdtrit

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.nctdtrinc.html#scipy.special.nctdtrinc

Ref: Kim (2007), CI noncentrality parameters

Application: Scholz.

Young, R package tolerance intervals

dist_student_t_nc.**pdf**(*x*)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a non-central Student t distribution:

$$\text{pdf}_X(x) = f_{t'}(x; n, \delta) = \frac{n^m \Gamma(n+1) \exp(-\frac{1}{2}\delta^2)}{2^n a^m \Gamma(m)} \left[\frac{\sqrt{2}\delta x \cdot {}_1F_1(m+1; \frac{3}{2}; y^2)}{a\Gamma(m+\frac{1}{2})} - \frac{{}_1F_1(m+\frac{1}{2}; \frac{1}{2}; y^2)}{\sqrt{a}\Gamma(m+1)} \right],$$

$$m = \frac{n}{2}, \quad a = n + x^2, \quad y^2 = \frac{\delta^2 x^2}{2a},$$

and ${}_1F_1(\cdot)$ is the confluent hypergeometric function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", student_t_nc(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_student_t_nc.**cdf**(*x*)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a non-central Student t distribution:

$$\text{cdf}_X(x) = F_{t'}(x; n, \delta) = \int_0^x f_t(x; n, \delta) \mathrm{d}t = \Phi(-\delta) + \frac{1}{2} \sum_{i=0}^{\infty} P_i I_z\left(i + \tfrac{1}{2}, m\right) + \frac{\delta}{\sqrt{2}} Q_i I_z\left(i + 1, m\right),$$

$$P_i = \frac{e^{-\lambda}\lambda^i}{i!}, \quad Q_i = \frac{e^{-\lambda}\lambda^i}{\Gamma(i+3/2)}; \quad z = \frac{t^2}{n+t^2},$$

and $I_x(\cdot,\cdot)$ denotes the (normalized) incomplete beta function , and $\Phi(\cdot)$ denotes the CDF of the normal distribution.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", student_t_nc(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

`dist_student_t_nc.`**`sf`**`(`x`)`

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following a non-central Student t distribution:

$$\mathrm{sf}_X(x) = 1 - \mathrm{cdf}_X(x) = \int_x^\infty \mathrm{pdf}_X(x)\mathrm{d}t.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", student_t_nc(mu, sigma).pdf(x))
sf: 6.35635234625645256156156145613 56E-20
```

`dist_student_t_nc.`**`qtf`**`(`q`)`

Returns $\mathrm{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following a non-central Student t distribution:

There is no known explicit form for the quantile function $\mathrm{cdf}_X^{-1}(x)$: It is computed using Newton iterations with starting values from a normal approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", student_t_nc(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

`dist_student_t_nc.`**`isf`**`(`q`)`

Returns $\mathrm{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following a non-central Student t distribution:

$$\mathrm{isf}_X(q) = \mathrm{qtf}_X(1-q) = \mathrm{cdf}_X^{-1}(1-q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", student_t_nc(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

`dist_student_t_nc.`**`c_x`**`(`t`)`

Returns $C_X(t)$, the characteristic function of a random variable X, following a non-central Student t distribution:

$$C_X(t) = \int_{-\infty}^{\infty} e^{itx}\mathrm{pdf}_X(x)\mathrm{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", student_t_nc(mu, sigma).c_x(t))
6.3563523462564525615615615614561356E+00
```

dist_student_t_nc.**m_x**(*t*)

Returns NaN, since the moment generating function does not exist.

dist_student_t_nc.**k_x**(*t*, *k=0*)

Returns NaN, since the cumulant generating function does not exist.

dist_student_t_nc.**moments**(*k*)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following a non-central Student t distribution. The rth moment only exists for $n > r$. and is given by

$$\mu'_X(r) = \left(\tfrac{1}{2}n\right)^{r/2} \frac{\Gamma\left(\frac{1}{2}(n-r)\right)}{\Gamma\left(\frac{1}{2}n\right)} \times \sum_{i=0}^{\lfloor r/2 \rfloor} \binom{r}{2i} \frac{(2i)!}{2^i i!} \delta^{r-2i},$$

See also: Paoella 2, page 381-382

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", student_t_nc(mu, sigma).moments(k))
6.3563523462564525615615615614561356E+00
```

dist_student_t_nc.**cumulants**(*k*)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following a non-central Student t distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", student_t_nc(mu, sigma).cumulants(k))
6.3563523462564525615615615614561356E+00
```

Approximations

ctx.**student_t_nc_ecf**(*x*, *n*, *delta*, *results='cdf'*)

where ctx is ipm, dec, mpm, or gmp.

Calculates the Edgeworth approximation to the pdf, cdf and sf. See also: Paolella [454], page 381-382.

ctx.**student_t_nc_ecf_inv**(*q*, *n*, *delta*, *theta*, *results='qtf'*)

where ctx is ipm, dec, mpm, or gmp.

Calculates the Cornish-Fisher approximation to the qtf and isf.

4.9.3 Boost: Noncentral Fisher F distribution

The following functions return the pdf, cdf, qtf or boost class of the non-central Fisher F distribution with $m > 0$ and $n > 0$ degrees of freedom, noncentrality parameter λ_1 , and the support interval $(0, +\infty)$.

See also Wikipedia [1157], MathWorld [805], BoostMath [65], Benton and Krishnamoorthy [30], Butler and Paolella [166], Chou [179], Chattamvelli and Jones [175], Wang and Gray [789], Johansson [384].

`math53.`**`fisher_f_nc_pdf`**(*m*, *n*, *lambda1*, *x*)

Returns pdf(x), the value of the probability density function (*Pdf*) of the non-central Fisher F distribution:

$$\text{pdf}(x) = f_{\text{FisherF}}(x; m, n; \lambda_1) = \frac{m}{n} \int_0^\infty y \cdot f_{\chi^2}\left(x \cdot y \cdot m/n, m, \lambda_1\right) \cdot f_{\chi^2}(y, n)\, \mathrm{d}y \tag{4.14}$$

Here $f_{\chi^2}(\cdot, m, \lambda_1)$ denotes the pdf of the noncentral χ^2 distribution with m degrees of freedom and noncentrality parameter λ_1 (see *chi2_nc_pdf()*), and $f_{\chi^2}(\cdot, n)$ denotes the pdf of the central χ^2 distribution with n degrees of freedom (see *chi_squared_pdf()*).

Alternatively, the pdf can be written in a form which shows the relationship to the central distribution more clearly:

$$\text{pdf}(x) = f_{F'}(x; n_1, n_2, \lambda_1) = e^{-\lambda_1/2} f_F(x; n_1, n_2) {}_1F_1\left(\tfrac{1}{2}(m+n), \tfrac{1}{2}n, \tfrac{nx\lambda_1}{2(m+nx)}\right), \tag{4.15}$$

Here $f_F(\cdot)$ denotes the pdf of the central F-distribution, and ${}_1F_1(\cdot)$ is the confluent hypergeometric function.

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("FisherFNcPdf(x, a, b): ", FisherFNcPdf(x, a, b))
>>> print ("dist_fisher_f_nc(a, b).pdf(x): ", dist_fisher_f_nc(a, b).pdf(x))
6.35635234625645256156156145613 56E+00
```

`math53.`**`fisher_f_nc_cdf`**(*m*, *n*, *lambda1*, *x*)

Returns cdf(x), the value of the cumulative distribution function (*Cdf*) of the non-central Fisher F distribution:

$$\text{cdf}(x) = F_{\text{FisherF}}(x; m, n; \lambda_1) = \frac{mx}{n} \int_0^\infty f_{\chi^2}\left(x \cdot y \cdot m/n, m; \lambda_1\right) \cdot \left[1 - F_{\chi^2}(y, n)\right] \mathrm{d}y \tag{4.16}$$

Here $f_{\chi^2}(\cdot, m, \lambda_1)$ denotes the pdf of the noncentral χ^2 distribution with m degrees of freedom and noncentrality parameter λ_1 (see *chi2_nc_pdf()*), and $F_{\chi^2}(\cdot, n)$ denotes the cdf of the central χ^2 distribution with n degrees of freedom (see *chi_squared_cdf()*).

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("FisherFNcCdf(x, a, b): ", FisherFNcCdf(x, a, b))
>>> print ("dist_fisher_f_nc(a, b).cdf(x): ", dist_fisher_f_nc(a, b).cdf(x))
6.35635234625645256156156145613 56E+00
```

`math53.`**`fisher_f_nc_qtf`**(*m*, *n*, *lambda1*, *q*)

Returns qtf(q), the value of the quantile function (*Qtf*) of the non-central Fisher F distribution:

There is no known closed exact form for qtf(q). For `fpm.` the default method is to call the function provided by Boost.

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("FisherFNcQtf(q, a, b): ", FisherFNcQtf(q, a, b))
>>> print ("dist_fisher_f_nc(a, b).qtf(q): ", dist_fisher_f_nc(a, b).qtf(q))
6.35635234625645256156156145614356E+00
```

class ctx.**dist_fisher_f_nc**(*m*, *n*, *lambda1*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The non-central Fisher F distribution is a continuous probability distribution with $m > 0$ and $n > 0$ degrees of freedom, noncentrality parameter λ_1 , and the support interval $(0, +\infty)$. See also Wikipedia [1157], MathWorld [805], BoostMath [65], Benton and Krishnamoorthy [30], Butler and Paolella [166], Chou [179], Chattamvelli and Jones [175], Wang and Gray [789], Witkovský [1468], Johansson [384], R (Statistical System) [515]. Also doubly-noncentral: Yin [1490].

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.ncfdtr.html#scipy.special.ncfdtr

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.ncfdtridfd.html#scipy.special.ncfdtridfd

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.ncfdtridfn.html#scipy.special.ncfdtridfn

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.ncfdtri.html#scipy.special.ncfdtri

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.ncfdtrinc.html#scipy.special.ncfdtrinc

dist_fisher_f_nc.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a non-central Fisher F distribution:

$$\text{pdf}_X(x) = f_{F'}(x; n_1, n_2, \lambda) = e^{-\lambda/2} f_F(x; n_1, n_2)\, {}_1F_1\left(\tfrac{1}{2}(m+n), \tfrac{1}{2}n, \tfrac{nx\lambda}{2(m+nx)}\right),$$

Here $f_F(\cdot)$ denotes the pdf of the central F-distribution, and ${}_1F_1(\cdot)$ is the confluent hypergeometric function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", fisher_f_nc(mu, sigma).pdf(x))
6.35635234625645256156156145614356E-20
```

dist_fisher_f_nc.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a non-central Fisher F distribution:

$$\text{cdf}_X(x) = F_{F'}(x; m, n, \lambda) = e^{-\lambda} \sum_{j=0}^{\infty} \frac{(\lambda/2)^j}{j!} F_F(x; m+2j, n)$$

Here $F_F(\cdot)$ denotes the cdf of the central F-distribution.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", fisher_f_nc(mu, sigma).pdf(x))
6.35635234625645256156156145614356E-20
```

dist_fisher_f_nc.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following a non-central Fisher F distribution:

$$\mathrm{sf}_X(x) = 1 - \mathrm{cdf}_X(x) = \int_x^\infty \mathrm{pdf}_X(x)\mathrm{d}t.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", fisher_f_nc(mu, sigma).pdf(x))
sf: 6.3563523462564525615615615614561356E-20
```

dist_fisher_f_nc.**qtf**(q)

Returns $\mathrm{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following a non-central Fisher F distribution:

There is no known explicit form for the quantile function $\mathrm{cdf}_X^{-1}(x)$: It is computed using Newton iterations with starting values from a central F approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", fisher_f_nc(mu, sigma).qtf(q))
qtf: 6.3563523462564525615615615614561356E+00
```

dist_fisher_f_nc.**isf**(q)

Returns $\mathrm{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following a non-central Fisher F distribution:

$$\mathrm{isf}_X(q) = \mathrm{qtf}_X(1-q) = \mathrm{cdf}_X^{-1}(1-q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f_nc(mu, sigma).isf(q))
6.3563523462564525615615615614561356E+00
```

dist_fisher_f_nc.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following a non-central Fisher F distribution:

$$C_X(t) = \int_0^\infty e^{itx}\mathrm{pdf}_X(x)\mathrm{d}x$$

$$\phi(t) = e^{-\lambda/2}\sum_{k=0}^{\infty}\frac{(\lambda/2)^k}{k!}{}_1F_1\left(\frac{\nu_1}{2}+k, -\frac{\nu_2}{2}, -\frac{\nu_2}{\nu_1}it\right).$$

CRC: page 122: arcsin, page 146 half-normal

See also: http://www.stat.uchicago.edu/~yibi/teaching/stat222/2017/Lectures/C05.pdf

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", fisher_f_nc(mu, sigma).c_x(t))
6.3563523462564525615615615614561356E+00
```

dist_fisher_f_nc.**m_x**(*t*)

Returns NaN, since the moment generating function does not exist.

dist_fisher_f_nc.**k_x**(*t*, *k=0*)

Returns NaN, since the cumulant generating function does not exist.

dist_fisher_f_nc.**moments**(*k*)

Returns the first j raw moments, $\mu_j, j = 1 \dots k$, of a random variable X, following a non-central Fisher F distribution. The rth moment only exists for $n_2 > 2r$ and is given by

$$\mu'_X(r) = \left(\frac{n_2}{n_1}\right)^r \frac{\Gamma(\frac{1}{2}n_1 + r)\Gamma(\frac{1}{2}n_2 - r)}{\Gamma(\frac{1}{2}n_2)} {}_1\widetilde{F}_1(-r; \tfrac{1}{2}n_1; -\tfrac{1}{2}\lambda_1),$$

where ${}_1\widetilde{F}_1(a, b; z)$ denotes Kummer's regularized confluent hypergeometric function.

See also: https://mathworld.wolfram.com/NoncentralF-Distribution.html

See also: Paoella 2, page 358-360

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", fisher_f_nc(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_fisher_f_nc.**cumulants**(*k*)

Returns the first j cumulants, $\kappa_j, j = 1 \dots k$, of a random variable X, following a non-central Fisher F distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", fisher_f_nc(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

Additional methods: Confidence intervals and sample size estimates

dist_fisher_f_nc.**nc_ci**(*alpha*, *beta*)

Returns a confidence interval for the noncentrality parameter *lambda*

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", fisher_f_nc(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

Recurrences: Non-central Fisher F, recurrence pdf

ctx.**fisher_f_nc_pdf_recurrence**(*x*, *lambda*, *start_n1*, *start_n2*, *target_n1*, *target_n2*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The following recurrence relations hold for the pdf:

Let the density $g_{m,n}$ be that of m/n times an $F_{m,n}$ random variable. Let $G_{m,n}(y)$ be its distribution function, and let $g^{\lambda}_{m,n}$ and $G^{\lambda}_{m,n}(y)$ be the density and distribution function of its (singly) noncentral version (the distribution of $\chi^2_m(\lambda)/\chi^2_n(0)$). Then the following recurrence relations hold (see Chattamvelli and Jones [175])

Applies a recurrence relation to calculate the cdf for different degrees of freedom for a given value of *x*. This is mostly useful when using asymptotic methods.

$$n\left[G^{\lambda}_{m,n+2}(y) - G^{\lambda}_{m-2,n+2}(y)\right] = -2g^{\lambda}_{m,n}(y)$$

$$\lambda(1+y)g^{\lambda}_{m+4,n}(y) = [\lambda y - m(1+y)]g^{\lambda}_{m+2,n}(y) + y(m+n)g^{\lambda}_{m,n}(y).$$

$$n(1+y)g^{\lambda}_{m,n+2}(y) = (m+n)g^{\lambda}_{m,n}(y) + \lambda g^{\lambda}_{m+2,n}(y).$$

$$\lambda g^{\lambda}_{m+4,n-2}(y) + m g^{\lambda}_{m+2,n-2}(y) = (n-2)y g^{\lambda}_{m,n}(y).$$

Recurrences: Non-central Fisher F, recurrence cdf

`ctx.`**`fisher_f_nc_cdf_recurrence`**(*x*, *lambda*, *start_n1*, *start_n2*, *target_n1*, *target_n2*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Applies a recurrence relation to calculate the cdf for different degrees of freedom for a given value of *x*. This is mostly useful when using asymptotic methods.

From these equations we obtain

$$\begin{aligned} \lambda(1+y)G^{\lambda}_{m+6,n}(y) &= [\lambda y - (m+2-\lambda)(1+y)]G^{\lambda}_{m+4,n}(y) \\ &+ [(m+2)(1+y) + y(m+n-\lambda)]G^{\lambda}_{m+2,n}(y) \\ &- y(m+n)G^{\lambda}_{m,n}(y) \end{aligned} \tag{4.17}$$

$$\begin{aligned} n(1+y) : cite : t : `G^{\lambda}_{m,n+2}(y) - G^{\lambda}_{m+2,n+2}(y)] &= (m+n)G^{\lambda}_{m,n}(y) \\ &+ (\lambda - m - n)G^{\lambda}_{m+2,n}(y) \\ &- \lambda G^{\lambda}_{m+4,n}(y) \end{aligned} \tag{4.18}$$

$$\begin{aligned} (n-2)y : cite : t : `G^{\lambda}_{m,n}(y) - G^{\lambda}_{m+2,n}(y)] &= (m+2)G^{\lambda}_{m+2,n-2}(y) \\ &+ (\lambda - m - 2)G^{\lambda}_{m+4,n-2}(y) \\ &- \lambda G^{\lambda}_{m+6,n-2}(y) \end{aligned} \tag{4.19}$$

Approximations

`ctx.`**`fisher_f_nc_ecf`**(*x*, *m*, *n*, *lambda1*, *results='cdf'*)

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Calculates the Edgeworth approximation to the pdf, cdf and sf. See also: MathWorld [805], Paolella [454], page 358-360.

`ctx.`**`fisher_f_nc_ecf_inv`**(*q*, *m*, *n*, *lambda1 results='qtf'*)

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Calculates the Cornish-Fisher approximation to the qtf and isf.

4.9.4 Boost: Noncentral Beta Type I distribution

The following functions return pdf, cdf, qtf or boost class of the noncentral beta distribution with shape parameters a and b, noncentrality parameter λ_1 and the support interval $(0, 1)$.

See also Wikipedia [1158], BoostMath [63], Wang and Gray [789], Johansson [384].

`math53.beta_nc_pdf`(a, b, *lambda1*, x)

Returns pdf(x), the value of the probability density function (*Pdf*) of the noncentral beta distribution:

$$\text{pdf}(x) = f_{\text{Beta}}(x; a, b; \lambda_1) = \frac{a}{b} \int_0^\infty y \cdot f_{\chi^2}\left(x \cdot y \cdot a/b, 2a, \lambda_1\right) \cdot f_{\chi^2}(y, n)\, \mathrm{d}y \tag{4.20}$$

Here $f_{\chi^2}(\cdot, m, \lambda_1)$ denotes the pdf of the noncentral χ^2 distribution with m degrees of freedom and noncentrality parameter λ_1 (see *chi2_nc_pdf()*), and $f_{\chi^2}(\cdot, n)$ denotes the pdf of the central χ^2 distribution with n degrees of freedom (see *chi_squared_pdf()*).

Alternatively, the pdf can be written in a form which shows the relationship to the central distribution more clearly:

$$\text{pdf}(x) = f_{\text{Beta}'}(x; a, b, \lambda_1) = e^{-\lambda_1/2} f_{\text{Beta}}(x; a, b) \times {}_1F_1\left((a+b), b, \tfrac{nx\lambda_1}{2(m+nx)}\right) \tag{4.21}$$

and $f_{\text{Beta}}(\cdot)$ denotes the PDF of the central Beta-distribution, and ${}_1F_1(\cdot)$ is the confluent hypergeometric function.

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("BetaNcPdf(x, a, b): ", BetaNcPdf(x, a, b))
>>> print ("dist_beta_nc(a, b).pdf(x): ", dist_beta_nc(a, b).pdf(x))
6.35635234625645256156156145613356E+00
```

`math53.beta_nc_cdf`(a, b, *lambda1*, x)

Returns cdf(x), the value of the cumulative distribution function (*Cdf*) of the noncentral beta distribution:

$$\text{cdf}(x) = F_{\text{Beta}}(x; a, b; \lambda_1) = \frac{az}{b} \int_0^\infty f_{\chi^2}\left(z \cdot y \cdot a/b, 2a; \lambda_1\right) \cdot \left[1 - F_{\chi^2}(y, 2b)\right] \mathrm{d}y, \quad z = \frac{bx}{a(1-x)} \tag{4.22}$$

Here $f_{\chi^2}(\cdot, m, \lambda_1)$ denotes the pdf of the noncentral χ^2 distribution with m degrees of freedom and noncentrality parameter λ_1 (see *chi2_nc_pdf()*).

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("BetaNcCdf(x, a, b): ", BetaNcCdf(x, a, b))
>>> print ("dist_beta_nc(a, b).cdf(x): ", dist_beta_nc(a, b).cdf(x))
6.35635234625645256156156145613356E+00
```

`math53.beta_nc_qtf`(a, b, *lambda1*, q)

Returns qtf(q), the value of the quantile function (*Qtf*) of the noncentral beta distribution:

There is no known closed exact form for qtf(q). For `fpm.` the default method is to call the function provided by Boost.

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("BetaNcQtf(q, a, b): ", BetaNcQtf(q, a, b))
>>> print ("dist_beta_nc(a, b).qtf(q): ", dist_beta_nc(a, b).qtf(q))
6.35635234625645256156156145613 56E+00
```

class ctx.**dist_beta_nc_type_I**(*a*, *b*, *lambda1*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The noncentral Beta Type I distribution is a continuous probability distribution with shape parameters a and b, noncentrality parameter λ_1 and the support interval $(0, 1)$. See also Wikipedia [1158], MathWorld [245], BoostMath [63], Wang and Gray [789], Witkovský [1466], Johansson [384], R (Statistical System) [513].

A random variable X follows a Type I noncentral beta distribution with shape parameters a and b and noncentrality parameter λ, if it is defined as $X = U_1/(U_1 + U_2)$ where U_1 and U_2 are independent with $U_1 \sim \chi^2(n_1, \lambda)$, and $U_2 \sim \chi^2(n_2)$ $n_1 = 2a$ and $n_2 = 2b$ are the degrees of freedom, and λ is the noncentrality parameter of the noncentral χ^2 distribution. The random variable $Y = 1 - X$ is said to follow a Type II noncentral beta distribution with shape parameters a and b and noncentrality parameter λ.

dist_beta_nc_type_I.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a Type I noncentral beta distribution:

$$\mathrm{pdf}_X(x) = f_{\mathrm{Beta}'}(x; a, b, \lambda) = e^{-\lambda/2} f_{\mathrm{Beta}}(x; a, b) \times {}_1F_1\left((a+b), b, \tfrac{nx\lambda}{2(m+nx)}\right)$$

and $f_{\mathrm{Beta}}(\cdot)$ and $F_{\mathrm{Beta}}(\cdot)$ denote the PDF and CDF, respectively, of the central Beta-distribution, and ${}_1F_1(\cdot)$ is the confluent hypergeometric function. There is no known explicit form for the quantile function $\mathrm{cdf}_X^{-1}(x)$: It is computed using Newton iterations with starting values from a central F approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", beta_nc_type_I(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_beta_nc_type_I.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a Type I noncentral beta distribution:

$$\mathrm{cdf}_X(x) = F_{\mathrm{Beta}'}(x; a, b, \lambda) = \int_0^x f_{\mathrm{Beta}'}(x; a, b, \lambda)\mathrm{d}t = e^{-\lambda/2} \sum_{j=0}^{\infty} \frac{(\lambda/2)^j}{j!} F_{\mathrm{Beta}}(x; a+j, b)$$

and $f_{\mathrm{Beta}}(\cdot)$ and $F_{\mathrm{Beta}}(\cdot)$ denote the PDF and CDF, respectively, of the central Beta-distribution, and ${}_1F_1(\cdot)$ is the confluent hypergeometric function. There is no known explicit form for the quantile function $\mathrm{cdf}_X^{-1}(x)$: It is computed using Newton iterations with starting values from a central F approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", beta_nc_type_I(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_beta_nc_type_I.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following a Type I noncentral beta distribution:

$$\mathrm{sf}_X(x) = 1 - \mathrm{cdf}_X(x) = \int_x^1 \mathrm{pdf}_X(x)\mathrm{d}t.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", beta_nc_type_I(mu, sigma).pdf(x))
sf: 6.356352346256452561561561561456135 6E-20
```

dist_beta_nc_type_I.**qtf**(q)

Returns $\mathrm{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following a Type I noncentral beta distribution:

There is no known closed form for the quantile function $\mathrm{cdf}_X^{-1}(q)$: It is computed with Newton iterations where the starting values are from a approximation by Winterbottom.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", beta_nc_type_I(mu, sigma).qtf(q))
qtf: 6.356352346256452561561561561456135 6E+00
```

dist_beta_nc_type_I.**isf**(q)

Returns $\mathrm{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following a Type I noncentral beta distribution:

$$\mathrm{isf}_X(q) = \mathrm{qtf}_X(1-q) = \mathrm{cdf}_X^{-1}(1-q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", beta_nc_type_I(mu, sigma).isf(q))
6.356352346256452561561561561456135 6E+00
```

dist_beta_nc_type_I.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following a Type I noncentral beta distribution:

$$C_X(t) = \int_0^1 e^{itx}\mathrm{pdf}_X(x)\mathrm{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", beta_nc_type_I(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

dist_beta_nc_type_I.**m_x**(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following a Type I noncentral beta distribution:

$$M_X(t) = \int_0^1 e^{tx}\mathrm{pdf}_X(x)\mathrm{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", beta_nc_type_I(mu, sigma).c_x(t))
6.35635234625645256156156145613356E+00
```

dist_beta_nc_type_I.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function:

$$K_X(t) = \log(M_X(t))$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", beta_nc_type_I(mu, sigma).k_x(t, k))
6.35635234625645256156156145613356E+00
```

dist_beta_nc_type_I.**moments**(*k*)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following a Type I noncentral beta distribution: the moments are calculated from their definition:

$$\mu'_X(r) = E(X^r) = \int_0^1 x^r \text{pdf}_X(x) \text{d}x$$

Returns the raw moments of non-central beta function. See Walck for details.

Algebraic moments of the non-central Beta-distribution are given as (see cite{walck_2007}, p. 109)

$$\text{E}(x^k) = e^{-\lambda/2} \sum_{r=0}^{\infty} \frac{(\lambda/2)^r}{r!} \frac{B(p+r+k, q)}{B(p+r, q)}$$

$$\text{E}(x^k) = \frac{\Gamma(p+k)\Gamma(p+q)}{\Gamma(p)\Gamma(p+q+k)} \times e^{-\lambda/2} {}_2F_2 1(p+q, p+k; p, p+q+k; \lambda/2)$$

Lower order moments are given by

$$\text{E}(Y) = \frac{a}{a+b} \times e^{-\lambda/2} {}_2F_2(a+1, a+b; a, a+b+1; \lambda/2)$$

$$\text{E}(Y^2) = \frac{a(a+1)}{a+b(a+b+1)} \times e^{-\lambda/2} {}_2F_2(a+1, a+b; a, a+b+1; \lambda/2)$$

The moments of $Y = 1 - X$ are given by:

$$\mu'_Y(r) = \frac{\Gamma(n/2+r)\Gamma((n+m)/2)}{\Gamma(n/2)\Gamma((n+m)/2+r)} \times {}_1F_1\left(r; \frac{n+m}{2} + r; -\frac{1}{2}\lambda\right),$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", beta_nc_type_I(mu, sigma).moments(k))
6.35635234625645256156156145613356E+00
```

dist_beta_nc_type_I.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following a Type I noncentral beta distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", beta_nc_type_I(mu, sigma).cumulants(k))
6.35635234625645256156156145561356E+00
```

4.9.5 Noncentral Chi distribution

class ctx.**dist_chi_nc**(*n1*, *n2*, *lambda*, ***kwargs*)

These functions return PDF, CDF, and ICDF of the noncentral chi distribution with location a, scale $b > 0$, and the support interval $(-\infty, +\infty)$:

See also: Wikipedia [1211], Witkovský [1484].

dist_chi_nc.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following an noncentral chi distribution:

$$\text{pdf}_X(x) = \frac{e^{-(x^2+\lambda^2)/2} x^k \lambda}{(\lambda x)^{k/2}} I_{k/2-1}(\lambda x)$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", dist_chi_nc(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_chi_nc.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following an noncentral chi distribution:

$$\text{cdf}_X(x) = 1 - Q_{\frac{k}{2}}(\lambda, x)$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", dist_chi_nc(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_chi_nc.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function function (sf) of a random variable X, following an noncentral chi distribution:

$$\text{sf}_X(x) = 1 - \text{cdf}_X(x).$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", dist_chi_nc(mu, sigma).pdf(x))
sf: 6.3563523462564525615615615614561356E-20
```

dist_chi_nc.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function function (qtf) of a random variable X, following an noncentral chi distribution:

$$\text{qtf}_X(q) = ??$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", dist_chi_nc(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_chi_nc.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function function (isf) of a random variable X, following an noncentral chi distribution:

$$\text{isf}_X(q) = ??$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", dist_chi_nc(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_chi_nc.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following an noncentral chi distribution:

$$C_X(t) = ??$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", dist_chi_nc(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_chi_nc.**m_x**(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following an noncentral chi distribution:

$$M_X(t) = ??$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("m_x: ", dist_chi_nc(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_chi_nc.**k_x**(t, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following an noncentral chi distribution:

$$K_X(t) = ??$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", dist_chi_nc(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

dist_chi_nc.**moments**(k)

Returns the first j central moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following an noncentral chi distribution (Wikipedia). The raw moments are calculated from the central moments.

$$\mu_X(k) = 2^{k/2}\Gamma(1+k/2)L_{k/2}^{((\nu-2)/2)}\left(-\tfrac{1}{2}\lambda^2\right)$$

$$L_n^{(\alpha)}(x) = \frac{\Gamma(\alpha+n+1)}{\Gamma(\alpha+1)\Gamma(n+1)}{}_1F_1(-n;\alpha+1;x)$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", dist_chi_nc(mu, sigma).moments(k))
6.35635234625645256156156145613356E+00
```

dist_chi_nc.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following an noncentral chi distribution. The cumulants are calculated from the moments.

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", dist_chi_nc(mu, sigma).cumulants(k))
6.35635234625645256156156145613356E+00
```

4.9.6 Rice (Nakagami-n) distribution

class ctx.**dist_rice**(*n1*, *n2*, *lambda*, ***kwargs*)

These functions return PDF, CDF, and ICDF of the Rice distribution with location a, scale $b > 0$, and the support interval $(-\infty, +\infty)$.

See also: Wikipedia [1222], Witkovský [1486].

dist_rice.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following an Rice distribution:

$$\mathrm{pdf}_X(x) = \frac{x}{\sigma^2} \exp\left(\frac{-(x^2+\nu^2)}{2\sigma^2}\right) I_0\left(\frac{x\nu}{\sigma^2}\right)$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", dist_rice(mu, sigma).pdf(x))
6.356352346256452561561561456135 6E-20
```

dist_rice.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following an Rice distribution:

$$\mathrm{cdf}_X(x) = 1 - Q_1\left(\frac{\nu}{\sigma}, \frac{x}{\sigma}\right)$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", dist_rice(mu, sigma).pdf(x))
6.356352346256452561561561456135 6E-20
```

dist_rice.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function function (sf) of a random variable X, following an Rice distribution:

$$\mathrm{sf}_X(x) = 1 - \mathrm{cdf}_X(x).$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", dist_rice(mu, sigma).pdf(x))
sf: 6.356352346256452561561561456135 6E-20
```

dist_rice.**qtf**(q)

Returns $\mathrm{qtf}_X(x)$, the quantile function function (qtf) of a random variable X, following an Rice distribution:

$$\mathrm{qtf}_X(q) = ??$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", dist_rice(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_rice.**isf**(*q*)

Returns $\text{isf}_X(q)$, the inverse survival function function (isf) of a random variable X, following an Rice distribution:

$$\text{isf}_X(q) = ??$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", dist_rice(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_rice.**c_x**(*t*)

Returns $C_X(t)$, the characteristic function of a random variable X, following an Rice distribution:

$$C_X(t) = ??$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", dist_rice(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_rice.**m_x**(*t*)

Returns $M_X(t)$, the moment generating function of a random variable X, following an Rice distribution:

$$M_X(t) = ??$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("m_x: ", dist_rice(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_rice.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following an Rice distribution:

$$K_X(t) = ??$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", dist_rice(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

dist_rice.**moments**(k)

Returns the first j central moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following an Rice distribution (Wikipedia). The raw moments are calculated from the central moments.

$$\mu_X(r) = \sigma^k 2^{k/2}\,\Gamma(1+k/2)\,L_{k/2}(-\nu^2/2\sigma^2),$$

$$L_q(x) = L_q^{(0)}(x) = M(-q, 1, x) = {}_1F_1(-q; 1; x)$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", dist_rice(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_rice.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following an Rice distribution. The cumulants are calculated from the moments.

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", dist_rice(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

4.9.7 Noncentral distribution of the sample correlation coefficient

class ctx.**dist_pearson_rho_nc**(*N*, *rho*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The noncentral distribution of Pearson's rho (the distribution of the sample correlation coefficient), with sample size $N \geq 3$, noncentrality parameter $\rho \in (-1, +1)$ is a continuous distribution with the support interval $(-1, +1)$. See also Wikipedia [1221], Hotelling [373], Guenther [353], Winterbottom [1447], Winterbottom [1448], Odeh [424], Ruben [491], Subrahmaniam and Subrahmaniam [506].

The correlation coefficient r in samples of size $N > 2$ from a non-singular bivariate normal population with correlation coefficent ρ can be represented in the form

$$\tilde{r} = (z + \tilde{\rho}\chi_{N-1})/\chi_{N-2}$$

where $\tilde{r} = r/\sqrt{1-r^2}$, $\tilde{\rho} = \rho/\sqrt{1-\rho^2}$, z is a standardized normal variate and z , χ_{N-1}, and χ_{N-2} are independent.

A random variable X follows the distribution of Pearson's correlation coefficient with sample size N and noncentrality parameter ρ, if $Y = X/(1-X)$ has the representation given above.

dist_pearson_rho_nc.**pdf**(*x*)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following the noncentral distribution of Pearson's rho:

$$\text{pdf}_X(x) = f_R(r, N; \rho) = \frac{(N-2)\Gamma(N-1)}{\sqrt{2\pi}\Gamma\left(N-\frac{1}{2}\right)} A^{N-1} C^{N-4} (1-x)^{\frac{3}{2}-N} {}_2F_1\left(\tfrac{1}{2}, \tfrac{1}{2}; N-\tfrac{1}{2}; \tfrac{1}{2}+\tfrac{1}{2}\rho r\right),$$

where $A = \sqrt{1-\rho^2}$, $\quad C = \sqrt{1-r^2}$, and ${}_2F_1(\cdot)$ is the Gaussian hypergeometric function.

In the special case when $\rho = 0$, the exact density function $f(r)$ can be written as:

$$f(r) = \frac{(1-r^2)^{\frac{n-4}{2}}}{\mathbf{B}\left(\frac{1}{2}, \frac{n-2}{2}\right)}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", pearson_rho_nc(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_pearson_rho_nc.**cdf**(*x*)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following the noncentral distribution of Pearson's rho:

$$\text{cdf}_X(x) = F_{R^2}(x; p, N, \rho^2) = \int_{-1}^{x} f_{R^2}(x; p, N, \rho^2)\mathrm{d}t$$

Two additional algorithms by Hotelling(1953) are also used to cover a broader range of parameters.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", pearson_rho_nc(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_pearson_rho_nc.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following the noncentral distribution of Pearson's rho:

$$\mathrm{sf}_X(x) = 1 - \mathrm{cdf}_X(x) = \int_x^1 \mathrm{pdf}_X(x)\mathrm{d}t.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", pearson_rho_nc(mu, sigma).pdf(x))
sf: 6.3563523462564525615615615614561356E-20
```

dist_pearson_rho_nc.**qtf**(q)

Returns $\mathrm{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following the noncentral distribution of Pearson's rho:

There is no known closed form for the quantile function $\mathrm{cdf}_X^{-1}(q)$: It is computed with Newton iterations where the starting values are from a approximation by Winterbottom.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", pearson_rho_nc(mu, sigma).qtf(q))
qtf: 6.3563523462564525615615615614561356E+00
```

dist_pearson_rho_nc.**isf**(q)

Returns $\mathrm{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following the noncentral distribution of Pearson's rho:

$$\mathrm{isf}_X(q) = \mathrm{qtf}_X(1-q) = \mathrm{cdf}_X^{-1}(1-q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", pearson_rho_nc(mu, sigma).isf(q))
6.3563523462564525615615615614561356E+00
```

dist_pearson_rho_nc.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following the noncentral distribution of Pearson's rho:

$$C_X(t) = \int_{-1}^1 e^{itx}\mathrm{pdf}_X(x)\mathrm{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", pearson_rho_nc(mu, sigma).c_x(t))
6.3563523462564525615615615614561356E+00
```

dist_pearson_rho_nc.**m_x**(*t*)

Returns $M_X(t)$, the moment generating function of a random variable X, following the noncentral distribution of Pearson's rho:

$$M_X(t) = \int_{-1}^{1} e^{tx} \text{pdf}_X(x) \text{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", pearson_rho_nc(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_pearson_rho_nc.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function:

$$K_X(t) = \log(M_X(t))$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", pearson_rho_nc(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

dist_pearson_rho_nc.**moments**(*k*)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following the noncentral distribution of Pearson's rho: the moments are calculated from their definition:

$$\mu'_X(r) = E(X^r) = \int_{-1}^{1} x^r \text{pdf}_X(x) \text{d}x$$

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following the distribution of Pearson's rho:

Johnson *et al.* [386], 2nd vol, page 555, gives the following formulas:

$$\mu_{2k+1} = \frac{B((k+1)/2), (n-2)/2}{B(1/2, (n-2)/2)} (1-\rho^2)^{(n-1)/2} \times {}_3F_2\left(\frac{k+1}{2}, \frac{n-1}{2}, \frac{n-1}{2}, \frac{n+k-1}{2}, \frac{1}{2}; \rho^2\right)$$

$$\mu_{2k} = \frac{(n-2)B((k+2)/2), (n-2)/2}{B(1/2, (n-2)/2)} (1-\rho^2)^{(n-1)/2} \times {}_3F_2\left(\frac{k+2}{2}, \frac{n}{2}, \frac{n}{2}, \frac{n+k}{2}, \frac{3}{2}; \rho^2\right)$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", pearson_rho_nc(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_pearson_rho_nc.**cumulants**(*k*)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following the noncentral distribution of Pearson's rho. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", pearson_rho_nc(mu, sigma).cumulants(k))
6.356352346256452561561561561456135 6E+00
```

Additional methods: Results based on Fisher's z-transformation

The generating functions and cumulants all exist, but are complicated and not useful for numerical work. Asymptotic expansions typically rely on the Fisher z-transform $Z(a) = \text{atanh}(a)$ and its inverse $Z^{-1}(a) = \tanh(a)$.

Let $m = N - 1$ and let $u_\alpha = \Phi^{-1}(\alpha)$ be the lower 100α percentage point of the standard normal distribution. The first 4 cumulants of $Z(X)$ are given by

$$\kappa_1 = \tfrac{1}{2}\log\left(\frac{1+\rho}{1-\rho}\right) + \frac{\rho}{2m} + \frac{5+\rho^2}{4m^2} + \frac{11+2\rho^2+3\rho^4}{8m^3} + O(m^{-4}),$$

$$\kappa_2 = \frac{1}{m} + \frac{4-\rho^2}{2m^2} + \frac{22-6\rho^2-3\rho^4}{6m^3} + O(m^{-4}), \quad \kappa_3 = \frac{\rho^3}{m^3} + O(m^{-4}), \quad \kappa_4 = \frac{2}{m^3} + O(m^{-4}).$$

4.9.8 Distribution of the logarithm of a noncentral Beta Type II variable

class ctx.**dist_logrv_beta_nc_type_II**(*a*, *b*, *lambda1*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The noncentral Beta Type II distribution is a continuous probability distribution with shape parameters a and b, noncentrality parameter λ_1 and the support interval $(0, 1)$. See also Wikipedia [1158], MathWorld [245], BoostMath [63], Wang and Gray [789], Witkovský [1466], Johansson [384], R (Statistical System) [513].

A random variable X follows a Type I noncentral beta distribution with shape parameters a and b and noncentrality parameter λ, if it is defined as $X = U_1/(U_1 + U_2)$ where U_1 and U_2 are independent with $U_1 \sim \chi^2(n_1, \lambda)$, and $U_2 \sim \chi^2(n_2)$ $n_1 = 2a$ and $n_2 = 2b$ are the degrees of freedom, and λ is the noncentrality parameter of the noncentral χ^2 distribution. The random variable $Y = 1 - X$ is said to follow a Type II noncentral beta distribution with shape parameters a and b and noncentrality parameter λ.

dist_logrv_beta_nc_type_II.**pdf**(*x*)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a Type I noncentral beta distribution:

$$\mathrm{pdf}_X(x) = f_{\mathrm{Beta}'}(x; a, b, \lambda) = e^{-\lambda/2} f_{\mathrm{Beta}}(x; a, b) \times {}_1F_1\left((a+b), b, \tfrac{nx\lambda}{2(m+nx)}\right)$$

and $f_{\mathrm{Beta}}(\cdot)$ and $F_{\mathrm{Beta}}(\cdot)$ denote the PDF and CDF, respectively, of the central Beta-distribution, and ${}_1F_1(\cdot)$ is the confluent hypergeometric function. There is no known explicit form for the quantile function $\mathrm{cdf}_X^{-1}(x)$: It is computed using Newton iterations with starting values from a central F approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", beta_nc_type_II(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_logrv_beta_nc_type_II.**cdf**(*x*)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a Type I noncentral beta distribution:

$$\mathrm{cdf}_X(x) = F_{\mathrm{Beta}'}(x; a, b, \lambda) = \int_0^x f_{\mathrm{Beta}'}(x; a, b, \lambda)\mathrm{d}t = e^{-\lambda/2} \sum_{j=0}^{\infty} \frac{(\lambda/2)^j}{j!} F_{\mathrm{Beta}}(x; a+j, b)$$

and $f_{\mathrm{Beta}}(\cdot)$ and $F_{\mathrm{Beta}}(\cdot)$ denote the PDF and CDF, respectively, of the central Beta-distribution, and ${}_1F_1(\cdot)$ is the confluent hypergeometric function. There is no known explicit form for the quantile function $\mathrm{cdf}_X^{-1}(x)$: It is computed using Newton iterations with starting values from a central F approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", beta_nc_type_II(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_logrv_beta_nc_type_II.**sf**(*x*)

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following a Type I noncentral beta distribution:

$$\mathrm{sf}_X(x) = 1 - \mathrm{cdf}_X(x) = \int_x^1 \mathrm{pdf}_X(x)\mathrm{d}t.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", beta_nc_type_II(mu, sigma).pdf(x))
sf: 6.3563523462564525615615615614561356E-20
```

dist_logrv_beta_nc_type_II.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following a Type I noncentral beta distribution:

There is no known closed form for the quantile function $\text{cdf}_X^{-1}(q)$: It is computed with Newton iterations where the starting values are from a approximation by Winterbottom.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", beta_nc_type_II(mu, sigma).qtf(q))
qtf: 6.3563523462564525615615615614561356E+00
```

dist_logrv_beta_nc_type_II.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following a Type I noncentral beta distribution:

$$\text{isf}_X(q) = \text{qtf}_X(1-q) = \text{cdf}_X^{-1}(1-q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", beta_nc_type_II(mu, sigma).isf(q))
6.3563523462564525615615615614561356E+00
```

It is more convenient to work with Y rather than X to obtain generating functions and moments: the characteristic function, $C_Y(t)$, moment generating function, $M_Y(t)$, cumulant generating function and its j^{th} derivative, $K_Y(t)$ and $K_Y^{(j)}(t)$, and the r^{th} raw moment, $\mu'_Y(r)$, of Y are given below:

dist_logrv_beta_nc_type_II.**c_y**(t)

Returns $C_Y(s)$, the characteristic function of a random variable Y, as defined above:

$$C_Y(t) = \frac{\Gamma(n/2 - it)\Gamma((n+m)/2)}{\Gamma(n/2)\Gamma((n+m)/2 - it)} \times {}_1F_1\left(-it; \frac{n+m}{2} - it; -\frac{1}{2}\lambda\right),$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", fisher_f_nc_type_II(mu, sigma).c_x(t))
6.3563523462564525615615615614561356E+00
```

dist_logrv_beta_nc_type_II.**m_y**(t)

Returns $M_Y(s)$, the moment generating function of a random variable Y, as defined above:

$$M_Y(t) = \frac{\Gamma(n/2 + t)\Gamma((n+m)/2)}{\Gamma(n/2)\Gamma((n+m)/2 + t)} \times {}_1F_1\left(t, \tfrac{1}{2}(n+m) + t, -\tfrac{1}{2}\lambda\right),$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", fisher_f_nc_type_II(mu, sigma).c_x(t))
6.356352346256452561561561456135 6E+00
```

dist_logrv_beta_nc_type_II.**k_y**(t, *k=0*)

Returns $K_Y(s)$, the cumulant generating function, and its j^{th} derivatives, $K_Y^{(j)}(s), j = 1 \ldots k$, of a random variable Y, as defined above:

$$K_Y(t) = \log\left[\frac{\Gamma(n/2+t)\Gamma((n+m)/2)}{\Gamma(n/2)\Gamma((n+m)/2+t)} \times {}_1F_1\left(t, \tfrac{1}{2}(n+m)+t, -\tfrac{1}{2}\lambda\right)\right],$$

$$K_Y^{(j)}(t) = \psi^{(j-1)}\left(\tfrac{1}{2}n + t - \tfrac{1}{2}(i-1)\right) - \psi^{(j-1)}\left(\tfrac{1}{2}(n+m) + t - \tfrac{1}{2}(i-1)\right) \quad (4.23)$$

$$+ \frac{\partial}{\partial t}\log\left[{}_1F_1\left(t, \tfrac{1}{2}(n+m)+t, -\tfrac{1}{2}\lambda\right)\right], \quad (4.24)$$

where $\psi^{(j-1)}(\cdot)$ denotes the polygamma function and ${}_1F_1(\cdot)$ is the confluent hypergeometric function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", fisher_f_nc_type_II(mu, sigma).k_x(t, k))
6.356352346256452561561561456135 6E+00
```

dist_logrv_beta_nc_type_II.**moments**(k)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following the distribution of the square of the multiple correlation coefficient: the moments are calculated from their definition:

$$\mu'_X(r) = E(X^r) = \int_0^1 x^r \text{pdf}_X(x)\text{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", fisher_r_square_type_II(mu, sigma).moments(k))
6.356352346256452561561561456135 6E+00
```

dist_logrv_beta_nc_type_II.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following the distribution of the square of the multiple correlation coefficient. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", fisher_r_square_type_II(mu, sigma).cumulants(k))
6.356352346256452561561561456135 6E+00
```

Approximations

ctx.**log1mbeta_nc_gp**(*t*, *n*, *m*, *lambda1*)

where ctx is dec, mpm, fpm, gmp or apm.

Calculates the pdf, cdf and sf from the characteristic function using the procedure of Gil-Pelaez (see *gil_pelaez_pdf()* and *gil_pelaez_cdf()*).

This uses $\log(1-X)$, X noncentral beta

ctx.**beta_nc_spa**(*x*, *n*, *results='c'*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

Calculates the Luggannini-Rice saddlepoint approximation of the pdf, cdf and sf.

This uses $2\log(1-X)$ of the non-central beta X

Returns $K_Y(s)$, the cumulant generating function, and its j^{th} derivatives, $K_Y^{(j)}(s), j = 1 \ldots k$, of a random variable Y, as defined above:

$$K_Y(t) = \log\left[\frac{\Gamma(n/2+t)\Gamma((n+m)/2)}{\Gamma(n/2)\Gamma((n+m)/2+t)} \times {}_1F_1\left(t, \tfrac{1}{2}(n+m)+t, -\tfrac{1}{2}\lambda\right)\right],$$

$$\begin{aligned} K_Y^{(j)}(t) &= \psi^{(j-1)}\left(\tfrac{1}{2}n + t - \tfrac{1}{2}(i-1)\right) - \psi^{(j-1)}\left(\tfrac{1}{2}(n+m) + t - \tfrac{1}{2}(i-1)\right) && (4.25)\\ &+ \frac{\partial}{\partial t}\log\left[{}_1F_1\left(t, \tfrac{1}{2}(n+m)+t, -\tfrac{1}{2}\lambda\right)\right], && (4.26)\end{aligned}$$

where $\psi^{(j-1)}(\cdot)$ denotes the polygamma function and ${}_1F_1(\cdot)$ is the confluent hypergeometric function.

ctx.**beta_nc_spa_inv**(*x*, *n*, *results='qtf'*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

Calculates the inverse Jensen saddlepoint approximation of the qtf and isf.

This uses $2\log(1-X)$ of the non-central beta X

4.9.9 Noncentral distribution (Type I) of Fisher's R^2

class ctx.**dist_fisher_r2_type_I**(*p*, *N*, *rho2*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The distribution of Fisher's R^2 Type I (the distribution of the square of the sample multiple correlation coefficient), with $p \geq 1$ predictor variables, sample size $N \geq p + 2$ and noncentrality parameter $\rho^2 \in (0, 1)$ is a continuous probability distribution with the support interval $(0, 1)$. See also Lee [405], Lee [406], Gurland [355], Gurland and Milton [357], Gurland and Asiribo [356], Muirhead [416], Benton and Krishnamoorthy [30], Fisher [334], Gatsonis and Sampson [341], Kelley [390].

A random variable X follows the distribution of Fisher's R^2 (the square of the multiple correlation coefficient) with p variables, sample size N and noncentrality parameter ρ^2, if $G = X/(1 - X)$ has the representation

$$G = \frac{(\tilde{\rho}\chi_{N-1} + z)^2 + \chi^2_{p-1}}{\chi^2_{N-1-p}},$$

where $\tilde{\rho} = \sqrt{\rho^2/(1 - \rho^2)}$, z is a standard normal variate, χ_f and χ^2_f are chi and chi-square variates on f degrees of freedom, and the variates figuring in this relation are independently distributed.

dist_fisher_r2_type_I.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following the distribution of the square of the multiple correlation coefficient:

$$\text{pdf}_X(x) = f_{R^2}(x; p, N, \rho^2) = f_{\text{Beta}}\left(x; \tfrac{1}{2}(p-1), \tfrac{1}{2}(N-p)\right) \times (1-\rho^2)^{n/2} \times {}_2F_1(\tfrac{1}{2}N, \tfrac{1}{2}N, \tfrac{1}{2}p; \rho^2 x),$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", fisher_r_square_type_I(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_fisher_r2_type_I.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following the distribution of the square of the multiple correlation coefficient:

$$\begin{aligned} \text{cdf}_X(x) &= F_{R^2}(x; p, N, \rho^2) = \int_0^x f_{R^2}(x; p, N, \rho^2)\mathrm{d}t \\ &= \sum_{i=0}^{\infty} f_{\text{NegBin}}\left((N-1)/2, i; 1-\rho^2\right) \times F_{\text{Beta}}\left(x; \tfrac{1}{2}(p-1)+i, \tfrac{1}{2}(N-p)\right), \end{aligned} \tag{4.27}$$

and $f_{\text{Beta}}(\cdot)$ and $F_{\text{Beta}}(\cdot)$ denote the PDF and CDF, respectively, of the central Beta-distribution, $f_{\text{NegBin}}(\cdot)$ denotes the PMF of the negative binomial distribution and and ${}_2F_1(\cdot)$ is the Gaussian hypergeometric function. There is no known explicit form for the quantile function $\text{cdf}^{-1}_X(x)$: It is computed using Newton iterations with starting values from a central F approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", fisher_r_square_type_I(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_fisher_r2_type_I.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following the distribution of the square of the multiple correlation coefficient:

$$\mathrm{sf}_X(x) = 1 - \mathrm{cdf}_X(x) = \int_x^1 \mathrm{pdf}_X(x)\mathrm{d}t.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", fisher_r_square_type_I(mu, sigma).pdf(x))
sf: 6.3563523462564525615615615614561356E-20
```

dist_fisher_r2_type_I.**qtf**(q)

Returns $\mathrm{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following the distribution of the square of the multiple correlation coefficient:

There is no known explicit form for the quantile function $\mathrm{cdf}_X^{-1}(x)$: It is computed using Newton iterations with starting values from a central F approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", fisher_r_square_type_I(mu, sigma).qtf(q))
qtf: 6.3563523462564525615615615614561356E+00
```

dist_fisher_r2_type_I.**isf**(q)

Returns $\mathrm{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following the distribution of the square of the multiple correlation coefficient:

$$\mathrm{isf}_X(q) = \mathrm{qtf}_X(1-q) = \mathrm{cdf}_X^{-1}(1-q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_r_square_type_I(mu, sigma).isf(q))
6.3563523462564525615615615614561356E+00
```

dist_fisher_r2_type_I.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following the distribution of the square of the multiple correlation coefficient:

$$C_X(t) = \int_0^1 e^{itx}\mathrm{pdf}_X(x)\mathrm{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", fisher_r_square_type_I(mu, sigma).c_x(t))
6.3563523462564525615615615614561356E+00
```

dist_fisher_r2_type_I.**m_x**(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following the distribution of the square of the multiple correlation coefficient:

$$M_X(t) = \int_0^1 e^{tx} \text{pdf}_X(x) \text{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", fisher_r_square_type_I(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_fisher_r2_type_I.**k_x**(t, *k=0*)

Returns $K_X(t)$, the cumulant generating function:

$$K_X(t) = \log(M_X(t))$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", fisher_r_square_type_I(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

dist_fisher_r2_type_I.**moments**(k)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following the distribution of the square of the multiple correlation coefficient: the moments are calculated from their definition:

$$\mu'_X(r) = E(X^r) = \int_0^1 x^r \text{pdf}_X(x) \text{d}x$$

The moments of $Y = 1 - X$ are given by:

$$\mu'_Y(r) = \frac{\Gamma(n/2 + r)\Gamma((n + m)/2)}{\Gamma(n/2)\Gamma((n + m)/2 + r)} \times {}_2F_1\left(r; \frac{n + m}{2} + r; -\tfrac{1}{2}\rho^2\right),$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", fisher_r_square_type_I(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_fisher_r2_type_I.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following the distribution of the square of the multiple correlation coefficient. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", fisher_r_square_type_I(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

Additional information: Moments of Fisher's `R^2`

[Muirhead1982` p. 178, gives the following formula (see also Johnson *et al.* [386] p. 621)

$$\mathrm{E}[(1-R^2)^h] = \frac{\left[\frac{1}{2}(n-m+1)\right]_h}{\left(\frac{1}{2}n\right)_h}(1-\bar{R}^2)^h \times {}_2F_1(h,h,\tfrac{1}{2}n+h;\bar{R}^2).$$

where $(a)_k$ is the Pochammer symbol and ${}_2F_1(\cdot)$ is the Gaussian hypergeometric function.

The lower order moments are given by

$$\mu_1' = 1 - \frac{(n-m+1)}{n}(1-\bar{R}^2)^h \times {}_2F_1(1,1,\tfrac{1}{2}n+1;\bar{R}^2).$$

$$\mathrm{E}[(1-R^2)^2] = \frac{\left[\frac{1}{2}(n-m+1)\right]_2}{\left(\frac{1}{2}n\right)_2}(1-\bar{R}^2)^2 \times {}_2F_1(2,2,\tfrac{1}{2}n+2;\bar{R}^2).$$

Additional information: Random number generation for Fisher's `R^2`

A notable result concerning the distribution of R^2 is that $\tilde{R}^2 = R^2/(1-R^2)$ has the representation

$$\tilde{R}^2 = \frac{(\tilde{\rho}\chi_n + z)^2 + \chi^2_{p-1}}{\chi^2_{n-p}}$$

where $\tilde{\rho}^2 = \rho^2/(1-\rho^2)$, n is the sample size less one, z is a standard normal variate, χ_f and χ^2_f are chi and chi-square variates on f degrees of freedem; the variates figuring in this relation are independently distributed and $\tilde{\rho}$ is taken to be positive (see Lee [405]).

Additional information: Recurrence relations for the pdf

For the particular cases of $p = 3$ and $p = 5$, we have for the pdf (see Lee [405]):

$$f_{R^2}(n,3;\rho^2) = \frac{(n-3)\sqrt{1-\rho^2}\,[f_R(n-1,R;\rho) - f_R(n-1,-R;\rho)]}{2(n-2)\rho\sqrt{1-R^2}}$$

$$\begin{aligned} f_{R^2}(n,5;\rho^2) &= \frac{(n-5)(1-\rho^2)R\,[f_R(n-2,R;\rho) + f_R(n-2,-R;\rho)]}{2(n-2)\rho^2(1-R^2)} \\ &- \frac{2(1-\rho^2)(1-R^2)f_{R^2}(n-2,3;\rho^2)}{2(n-2)\rho^2(1-R^2)} \end{aligned} \tag{4.28}$$

where $f_R(\cdot)$ denotes the pdf of the distribution of the sample correlation coeffcient. Starting with these formulas, the pdf can be calculated for all odd p, using the following recurrence relation, which is valid for all integer values of $p \geq 6$:

$$\begin{aligned} (n-2)\rho^2(1-R^2)f_{R^2}(n,p;\rho^2) &= (n-p)R^2(1-\rho^2)f_{R^2}(n-2,p-4;\rho^2) \\ &- (p-4)(1-\rho^2)(1-R^2)f_{R^2}(n-2,p-2;\rho^2) \end{aligned} \tag{4.29}$$

Additional information: Recurrence relations for the cdf

For the particular cases of $p = 3$ and $p = 5$, we have for the CDF Lee [405]:

$$F_{R^2}(n,3;\rho^2) = F_{R^2}(n,1;\rho^2) - \frac{\sqrt{(1-\rho^2)(1-R^2)}\,[f_R(n-1,R;\rho) - f_R(n-1,-R;\rho)]}{(n-2)\rho}$$

$$\begin{aligned} F_{R^2}(n,5;\rho^2) &= F_{R^2}(n,3;\rho^2) - \frac{(1-\rho^2)R\,[f_R(n-2,R;\rho) - f_R(n-2,-R;\rho)]}{(n-2)\rho} \\ &- \frac{(1-\rho^2)\left[F_{R^2}(n-2,3;\rho^2) - F_{R^2}(n-2,1;\rho^2)\right]}{(n-2)\rho} \end{aligned} \tag{4.30}$$

where $F_R(\cdot)$ denotes the CDF of the distribution of the sample correlation coeffcient. Starting with these formulas, the CDF can be calculated for all odd p, using the following recurrence relations for the cdf, which is valid for all integer values of $p \geq 6$:

$$\begin{aligned}(n-2)\rho^2(1-R^2)F_{R^2}(n,p;\rho^2) &= (n-p)\rho^2 F_{R^2}(n,p-2;\rho^2) \\ &- (p-4)(1-\rho^2)\left[F_{R^2}(n-2,p-2;\rho^2) - F_{R^2}(n-2,p-4;\rho^2)\right] \\ &- 2R^2(1-\rho^2)f_{R^2}(n-2,p-4;\rho^2)\end{aligned} \tag{4.31}$$

4.9.10 Distribution of the logarithm of a noncentral Fisher $1 - R^2$ variable

class ctx.**dist_logrv_fisher_1mr2**(*p*, *N*, *rho2*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The distribution of Fisher's R^2 Type II with $p \geq 1$ predictor variables, sample size $N \geq p + 2$ and noncentrality parameter $\rho^2 \in (0, 1)$ is a continuous probability distribution with the support interval $(0, 1)$. See also Lee [405], Lee [406], Gurland [355], Gurland and Milton [357], Gurland and Asiribo [356], Muirhead [416], Benton and Krishnamoorthy [30], Fisher [334], Gatsonis and Sampson [341].

A random variable X follows the distribution of Fisher's R^2 (the square of the multiple correlation coefficient) with p variables, sample size N and noncentrality parameter ρ^2, if $G = X/(1 - X)$ has the representation

$$G = \frac{(\tilde{\rho}\chi_{N-1} + z)^2 + \chi^2_{p-1}}{\chi^2_{N-1-p}},$$

where $\tilde{\rho} = \sqrt{\rho^2/(1 - \rho^2)}$, z is a standard normal variate, χ_f and χ^2_f are chi and chi-square variates on f degrees of freedom, and the variates figuring in this relation are independently distributed.

dist_logrv_fisher_1mr2.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following the distribution of the square of the multiple correlation coefficient:

$$\text{pdf}_X(x) = f_{R^2}(x; p, N, \rho^2) = f_{\text{Beta}}\left(x; \tfrac{1}{2}(p-1), \tfrac{1}{2}(N-p)\right) \times (1-\rho^2)^{n/2} \times {}_2F_1(\tfrac{1}{2}N, \tfrac{1}{2}N, \tfrac{1}{2}p; \rho^2 x),$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", fisher_r_square_type_II(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_logrv_fisher_1mr2.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following the distribution of the square of the multiple correlation coefficient:

$$\begin{aligned} \text{cdf}_X(x) &= F_{R^2}(x; p, N, \rho^2) = \int_0^x f_{R^2}(x; p, N, \rho^2)\mathrm{d}t \\ &= \sum_{i=0}^{\infty} f_{\text{NegBin}}\left((N-1)/2, i; 1-\rho^2\right) \times F_{\text{Beta}}\left(x; \tfrac{1}{2}(p-1)+i, \tfrac{1}{2}(N-p)\right), \end{aligned} \tag{4.32}$$

and $f_{\text{Beta}}(\cdot)$ and $F_{\text{Beta}}(\cdot)$ denote the PDF and CDF, respectively, of the central Beta-distribution, $f_{\text{NegBin}}(\cdot)$ denotes the PMF of the negative binomial distribution and and ${}_2F_1(\cdot)$ is the Gaussian hypergeometric function. There is no known explicit form for the quantile function $\text{cdf}^{-1}_X(x)$: It is computed using Newton iterations with starting values from a central F approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", fisher_r_square_type_II(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_logrv_fisher_1mr2.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following the distribution of the square of the multiple correlation coefficient:

$$\mathrm{sf}_X(x) = 1 - \mathrm{cdf}_X(x) = \int_x^1 \mathrm{pdf}_X(x)\mathrm{d}t.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", fisher_r_square_type_II(mu, sigma).pdf(x))
sf: 6.35635234625645256156156156145613 56E-20
```

dist_logrv_fisher_1mr2.**qtf**(q)

Returns $\mathrm{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following the distribution of the square of the multiple correlation coefficient:

There is no known explicit form for the quantile function $\mathrm{cdf}_X^{-1}(x)$: It is computed using Newton iterations with starting values from a central F approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", fisher_r_square_type_II(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156156145613 56E+00
```

dist_logrv_fisher_1mr2.**isf**(q)

Returns $\mathrm{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following the distribution of the square of the multiple correlation coefficient:

$$\mathrm{isf}_X(q) = \mathrm{qtf}_X(1-q) = \mathrm{cdf}_X^{-1}(1-q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_r_square_type_II(mu, sigma).isf(q))
6.35635234625645256156156156145613 56E+00
```

It is more convenient to work with $Y = 1 - X$ rather than X to obtain generating functions and moments: the characteristic function, $C_Y(t)$, moment generating function, $M_Y(t)$, cumulant generating function and its j^{th} derivative, $K_Y(t)$ and $K_Y^{(j)}(t)$, and the r^{th} raw moment, $\mu'_Y(r)$, of Y are given below:

dist_logrv_fisher_1mr2.**c_y**(t)

Returns $C_Y(s)$, the characteristic function of a random variable Y (as defined above):

$$C_Y(t) = \frac{\Gamma(n/2 - it)\Gamma((n+m)/2)}{\Gamma(n/2)\Gamma((n+m)/2 - it)} \times {}_2F_1\left(-it; \frac{n+m}{2} - it; -\frac{1}{2}\rho^2\right),$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", fisher_f_nc(mu, sigma).c_x(t))
6.35635234625645256156156156145613 56E+00
```

dist_logrv_fisher_1mr2.**m_y**(t)

Returns $M_Y(s)$, the moment generating function of a random variable Y (as defined above):

$$M_Y(t) = \frac{\Gamma(n/2+t)\Gamma((n+m)/2)}{\Gamma(n/2)\Gamma((n+m)/2+t)} \times {}_2F_1\left(t, \tfrac{1}{2}(n+m)+t, -\tfrac{1}{2}\rho^2\right),$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", fisher_f_nc(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_logrv_fisher_1mr2.**k_y**(t, *k=0*)

Returns $K_Y(s)$, the cumulant generating function, and its j^{th} derivatives, $K_Y^{(j)}(s), j = 1 \ldots k$, of a random variable Y (as defined above):

$$K_Y(t) = \log\left[\frac{\Gamma(n/2+t)\Gamma((n+m)/2)}{\Gamma(n/2)\Gamma((n+m)/2+t)} \times {}_2F_1\left(t, \tfrac{1}{2}(n+m)+t, -\tfrac{1}{2}\rho^2\right)\right],$$

$$K_Y^{(j)}(t) = \psi^{(j-1)}\left(\tfrac{1}{2}n + t - \tfrac{1}{2}(i-1)\right) - \psi^{(j-1)}\left(\tfrac{1}{2}(n+m) + t - \tfrac{1}{2}(i-1)\right) \tag{4.33}$$

$$+ \frac{\partial}{\partial t}\log\left[{}_2F_1\left(t, \tfrac{1}{2}(n+m)+t, -\tfrac{1}{2}\rho^2\right)\right], \tag{4.34}$$

where $\psi^{(j-1)}(\cdot)$ denotes the polygamma function and ${}_2F_1(\cdot)$ is the Gaussian hypergeometric function. The solution $\hat{s}(y)$ of the saddlepoint equation $K_Y^{(1)}(\hat{s}(y)) = y$ needs to be determined numerically.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", fisher_f_nc(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

dist_logrv_fisher_1mr2.**moments**(k)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following the distribution of the square of the multiple correlation coefficient: the moments are calculated from their definition:

$$\mu'_X(r) = E(X^r) = \int_0^1 x^r \text{pdf}_X(x)\text{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", fisher_r_square_type_II(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_logrv_fisher_1mr2.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following the distribution of the square of the multiple correlation coefficient. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", fisher_r_square_type_II(mu, sigma).cumulants(k))
6.35635234625645256156156145614356E+00
```

Approximations

`ctx.`**`fisher_log1mr2_gp`**(*t*, *p*, *N*, *rho2*)

where `ctx` is `dec`, `mpm`, `fpm`, `gmp` or `apm`.

Calculates the pdf, cdf and sf from the characteristic function using the procedure of Gil-Pelaez (see *gil_pelaez_pdf()* and *gil_pelaez_cdf()*).

This uses $Y = \log(1 - R^2)$

`ctx.`**`fisher_r2_spa`**(*x*, *n*, *results='c'*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Calculates the Luggannini-Rice saddlepoint approximation of the pdf, cdf and sf.

This uses $Y = \log(1 - R^2)$

`ctx.`**`fisher_r2_spa_inv`**(*x*, *n*, *results='qtf'*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Calculates the inverse Jensen saddlepoint approximation of the qtf and isf.

This uses $Y = \log(1 - R^2)$

4.9.11 Doubly non-central Student t distribution

class ctx.**dist_student_t_2nc**(*n*, *delta*, *theta*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The doubly non-central Student t distribution is a continuous probability distribution with $n > 0$ degrees of freedom, noncentrality parameters δ and θ, and support interval $(-\infty, +\infty)$. See also Broda and Paolella [160], Kocherlakota and Kocherlakota [392], Paolella [453], Paolella [454], Gessner [346],

dist_student_t_2nc.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a doubly non-central Student t distribution:

$$\mathrm{pdf}_X(x) = f_{t''}(t; n; \mu, \theta) = \sum_{i=0}^{\infty} \omega_{i,\theta} s_{i,n} f_{t'}(s_{i,n} x; n + 2i, \mu),$$

where $f_{t'}(\cdot)$ denotes the PDF of the singly noncentral t-distribution, and

$$\omega_{i,\theta} = \frac{\exp(-\theta/2)(\theta/2)^i}{i!} \quad \text{and} \quad s_{i,n} = \sqrt{\frac{n+2i}{n}}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", student_t_2nc(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_student_t_2nc.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a doubly non-central Student t distribution:

$$\mathrm{cdf}_X(x) = F_{t''}(x; n; \mu, \theta) = \int_0^x f_{t''}(x; n; \mu, \theta)\mathrm{d}t = \sum_{i=0}^{\infty} \omega_{i,\theta} s_{i,n} F_{t'}(s_{i,n} x; n + 2i, \mu),$$

where $F_{t'}(\cdot)$ denotes the CDF of the singly noncentral t-distribution, and

$$\omega_{i,\theta} = \frac{\exp(-\theta/2)(\theta/2)^i}{i!} \quad \text{and} \quad s_{i,n} = \sqrt{\frac{n+2i}{n}}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", student_t_2nc(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_student_t_2nc.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following a doubly non-central Student t distribution:

$$\mathrm{sf}_X(x) = 1 - \mathrm{cdf}_X(x) = \int_x^{\infty} \mathrm{pdf}_X(x)\mathrm{d}t.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", student_t_2nc(mu, sigma).pdf(x))
sf: 6.356352346256452561561561561456135 6E-20
```

dist_student_t_2nc.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following a doubly non-central Student t distribution:

There is no known explicit form for the quantile function $\text{cdf}_X^{-1}(x)$: It is computed using Newton iterations with starting values from a singly noncentral t approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", student_t_2nc(mu, sigma).qtf(q))
qtf: 6.356352346256452561561561456135 6E+00
```

dist_student_t_2nc.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following a doubly non-central Student t distribution:

$$\text{isf}_X(q) = \text{qtf}_X(1-q) = \text{cdf}_X^{-1}(1-q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", student_t_2nc(mu, sigma).isf(q))
6.356352346256452561561561456135 6E+00
```

dist_student_t_2nc.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following a doubly non-central Student t distribution:

$$C_X(t) = \int_{-\infty}^{\infty} e^{itx} \text{pdf}_X(x) \mathrm{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", student_t_2nc(mu, sigma).c_x(t))
6.356352346256452561561561456135 6E+00
```

dist_student_t_2nc.**m_x**(t)

Returns `NaN`, since the moment generating function does not exist.

dist_student_t_2nc.**k_x**(t, *k=0*)

Returns `NaN`, since the cumulant generating function does not exist.

dist_student_t_2nc.**moments**(k)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following a doubly non-central Student t distribution. The rth moment only exists for $n > r$ and is given by

$$\mu'_X(r) = \left(\tfrac{1}{2}n\right)^{r/2} \frac{\Gamma\left(\frac{1}{2}(n-r)\right)}{\Gamma\left(\frac{1}{2}n\right)} \times {}_1F_1(\tfrac{1}{2}r, \tfrac{1}{2}n, -\tfrac{1}{2}\theta) \times \sum_{i=0}^{\lfloor r/2 \rfloor} \binom{r}{2i} \frac{(2i)!}{2^i i!} \delta^{r-2i},$$

where ${}_1F_1(\cdot)$ denotes Kummer's confluent hypergeometric function.

See also: Paoella 2, page 381-382

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", student_t_2nc(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_student_t_2nc.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following a doubly non-central Student t distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", student_t_2nc(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

Approximations

ctx.**student_t_nc2_ecf**(*x*, *n*, *delta*, *theta*, *results='cdf'*)

where ctx is ipm, dec, mpm, or gmp.

Calculates the Edgeworth approximation to the pdf, cdf and sf. See also: Paolella [454], page 381-382.

ctx.**student_t_nc2_ecf_inv**(*q*, *n*, *delta*, *theta*, *results='qtf'*)

where ctx is ipm, dec, mpm, or gmp.

Calculates the Cornish-Fisher approximation to the qtf and isf.

4.9.12 Doubly non-central Fisher F distribution

class ctx.**dist_fisher_f_2nc**(*m*, *n*, *lambda1*, *lambda2*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The doubly non-central Fisher F distribution is a continuous probability distribution with $m > 0$ and $n > 0$ degrees of freedom, noncentrality parameters $\lambda_1 \geq 0$ and $\lambda_2 \geq 0$, and the support interval $(0, +\infty)$. See also Butler and Paolella [166], Chou [179], Chattamvelli and Jones [175].

dist_fisher_f_2nc.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a doubly non-central Fisher F distribution:

$$\mathrm{pdf}_X(x) = f_{F''}(x; n_1, n_2; \lambda_1, \lambda_2) = \sum_{i=0}^{\infty} \omega_{i,\lambda_2} s_{i,n} f_{F'}(s_{i,n}x; n + 2i, \lambda_1),$$

where $f_{F'}(\cdot)$ denotes the PDF of the singly noncentral F-distribution, and

$$\omega_{i,\lambda_2} = \frac{\exp(-\lambda_2/2)(\lambda_2/2)^i}{i!} \quad \text{and} \quad s_{i,n} = \sqrt{\frac{n+2i}{n}}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", fisher_f_2nc(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_fisher_f_2nc.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a doubly non-central Fisher F distribution:

$$\mathrm{cdf}_X(x) = F_{F''}(x; n_1, n_2; \lambda_1, \lambda_2) = \sum_{i=0}^{\infty} \omega_{i,\theta} s_{i,n} F_{F'}(s_{i,n_2}x; n_1 + 2i, n_2; \lambda_1),$$

where $F_{F'}(\cdot)$ denotes the CDF of the singly noncentral F-distribution, and

$$\omega_{i,\lambda_2} = \frac{\exp(-\lambda_2/2)(\lambda_2/2)^i}{i!} \quad \text{and} \quad s_{i,n} = \sqrt{\frac{n+2i}{n}}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", fisher_f_2nc(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_fisher_f_2nc.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following a doubly non-central Fisher F distribution:

$$\mathrm{sf}_X(x) = 1 - \mathrm{cdf}_X(x) = \int_x^{\infty} \mathrm{pdf}_X(x)\mathrm{d}t.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", fisher_f_2nc(mu, sigma).pdf(x))
sf: 6.356352346256452561561561561456135 6E-20
```

dist_fisher_f_2nc.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following a doubly non-central Fisher F distribution:

There is no known explicit form for the quantile function $\text{cdf}_X^{-1}(x)$: It is computed using Newton iterations with starting values from a central F approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", fisher_f_2nc(mu, sigma).qtf(q))
qtf: 6.356352346256452561561561456135 6E+00
```

dist_fisher_f_2nc.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following a doubly non-central Fisher F distribution:

$$\text{isf}_X(q) = \text{qtf}_X(1-q) = \text{cdf}_X^{-1}(1-q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f_2nc(mu, sigma).isf(q))
6.356352346256452561561561456135 6E+00
```

dist_fisher_f_2nc.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following a doubly non-central Fisher F distribution:

$$C_X(t) = \int_0^\infty e^{itx} \text{pdf}_X(x) \mathrm{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", fisher_f_2nc(mu, sigma).c_x(t))
6.356352346256452561561561456135 6E+00
```

dist_fisher_f_2nc.**m_x**(t)

Returns `NaN`, since the moment generating function does not exist.

dist_fisher_f_2nc.**k_x**(t, *k=0*)

Returns `NaN`, since the cumulant generating function does not exist.

`dist_fisher_f_2nc.moments(k)`

Returns the first j raw moments, $\mu_j, j = 1 \dots k$, of a random variable X, following a doubly non-central Fisher F distribution. The rth moment only exists for $n_2 > 2r$, and is given by

$$\mu'_X(r) = \left(\frac{n_2}{n_1}\right)^r \Gamma(\tfrac{1}{2}n_1 + r)\Gamma(\tfrac{1}{2}n_2 - r) \times {}_1\widetilde{F}_1(-r; \tfrac{1}{2}n_1; -\tfrac{1}{2}\lambda_1) \times {}_1\widetilde{F}_1(r; \tfrac{1}{2}n_2; -\tfrac{1}{2}\lambda_2),$$

where ${}_1\widetilde{F}_1(a, b; z)$ denotes Kummer's regularized confluent hypergeometric function.

See also: https://mathworld.wolfram.com/NoncentralF-Distribution.html

See also: Paoella 2, page 358-360

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", fisher_f_2nc(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

`dist_fisher_f_2nc.cumulants(k)`

Returns the first j cumulants, $\kappa_j, j = 1 \dots k$, of a random variable X, following a doubly non-central Fisher F distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", fisher_f_2nc(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

Additional methods: confidence intervals and sample size estimates

`dist_fisher_f_2nc.nc_ci(alpha, beta)`

Returns a confidence interval for the noncentrality parameter *lambda*

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", fisher_f_2nc(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

Recurrences: Doubly non-central Fisher F, recurrence pdf

`ctx.fisher_f_nc2_pdf_recurrence(x, lambda, start_n1, start_n2, target_n1, target_n2)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Applies a recurrence relation to calculate the cdf for different degrees of freedom for a given value of x. This is mostly useful when using asymptotic methods.

Let the density $g_{m,n}$ be that of m/n times an $F_{m,n}$ random variable. Let $G_{m,n}(y)$ be its distribution function, and let $g^{\lambda_1,\lambda_2}_{m,n}$ and $G^{\lambda_1,\lambda_2}_{m,n}(y)$ be the density and distribution function of its doubly noncentral version (the distribution of $\chi^2_m(\lambda_1)/\chi^2_n(\lambda_2)$). Then the following recurrence relations hold (see Chattamvelli and Jones [175])

$$n\left[G^{\lambda}_{m,n}(y) - G^{\lambda}_{m,n}(y)\right] = -2g^{\lambda}_{m,n}(y)$$

$$\lambda_1(1+y)g^{\lambda_1,\lambda_2}_{m+4,n}(y) = [\lambda_1 y - m(1+y)]g^{\lambda_1,\lambda_2}_{m+2,n}(y) + y(m+n)g^{\lambda_1,\lambda_2}_{m,n}(y) + \lambda_2 g^{\lambda_1,\lambda_2}_{m,n+2}(y).$$

$$\lambda_2(1+y)g^{\lambda_1,\lambda_2}_{m,n+4}(y) = [\lambda_2 y - n(1+y)]g^{\lambda_1,\lambda_2}_{m+2,n}(y) + (m+n)g^{\lambda_1,\lambda_2}_{m,n}(y) + \lambda_1 g^{\lambda_1,\lambda_2}_{m+2,n}(y).$$

$$\lambda_1 g^{\lambda_1,\lambda_2}_{m+4,n-2}(y) = -mg^{\lambda_1,\lambda_2}_{m+2,n}(y) + nyg^{\lambda_1,\lambda_2}_{m,n+2}(y) + \lambda_2 g^{\lambda_1,\lambda_2}_{m+2,n}(y).$$

Recurrences: Doubly non-central Fisher F, recurrence cdf

`ctx.fisher_f_nc2_cdf_recurrence(x, lambda, start_n1, start_n2, target_n1, target_n2)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Applies a recurrence relation to calculate the cdf for different degrees of freedom for a given value of x. This is mostly useful when using asymptotic methods.

$$\begin{aligned}\lambda_1(1+y)G^{\lambda_1,\lambda_2}_{m+6,n}(y) &= [\lambda_1 y-(m+2-\lambda_1)(1+y)]G^{\lambda_1,\lambda_2}_{m+4,n}(y)\\ &+ [(m+2)(1+y)+y(m+n-\lambda_1)]G^{\lambda_1,\lambda_2}_{m+2,n}(y)\\ &- y(m+n)G^{\lambda_1,\lambda_2}_{m,n}(y)+\lambda_2 y:cite:t:`G^{\lambda_1,\lambda_2}_{m+2,n+2}(y)-G^{\lambda_1,\lambda_2}_{m,n+2}(y)]\end{aligned} \tag{4.35}$$

$$\begin{aligned}[n(1+y)-\lambda_2]:cite:t:`G^{\lambda_1,\lambda_2}_{m,n+2}(y)-G^{\lambda_1,\lambda_2}_{m+2,n+2}(y) &= (m+n):cite:t:`G^{\lambda_1,\lambda_2}_{m+2,n}(y)-G^{\lambda_1,\lambda_2}_{m,n}(y)]\\ &+ \lambda_2(1+y)[G^{\lambda_1,\lambda_2}_{m+2,n}(y)-G^{\lambda_1,\lambda_2}_{m+2,n}(y)]\\ &- \lambda_1:cite:t:`G^{\lambda_1,\lambda_2}_{m+2,n}(y)-G^{\lambda_1,\lambda_2}_{m+4,n}(y)]\end{aligned} \tag{4.36}$$

$$\begin{aligned}(m+2):cite:t:`G^{\lambda_1,\lambda_2}_{m+2,n}(y) &= (\lambda_1-m-2)G^{\lambda_1,\lambda_2}_{m+4,n}(y)-\lambda_1 G^{\lambda_1,\lambda_2}_{m+6,n}(y)\\ &+ y[nG^{\lambda_1,\lambda_2}_{m,n}(y)-nG^{\lambda_1,\lambda_2}_{m+2,n}(y)\\ &- \lambda_2 G^{\lambda_1,\lambda_2}_{m,n}(y)-\lambda_2 G^{\lambda_1,\lambda_2}_{m+2,n}(y)]\end{aligned} \tag{4.37}$$

Approximations

`ctx.fisher_f_nc2_ecf(x, m, n, lambda1, lambda2, results='cdf')`

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Calculates the Edgeworth approximation to the pdf, cdf and sf. See also: MathWorld [805], Paolella [454], page 358-360.

`ctx.fisher_f_nc2_ecf_inv(q, m, n, lambda1, lambda2, results='qtf')`

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Calculates the Cornish-Fisher approximation to the qtf and isf.

`ctx.fisher_f_nc2_spa(x, m, n, lambda1, lambda2, results='cdf')`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Calculates the Luggannini-Rice saddlepoint approximation of the pdf, cdf and sf.

A random variable X follows a doubly noncentral F-distribution with n_1 and n_2 degrees of freedom and noncentrality parameters λ_1 and λ_2, if it is defined as $X = (U_1/n_1)/(U_2/n_2)$, where U_1 and U_2 are independent with $U_i \sim \chi^2(n_i, \lambda_i)$, the n_i are the degrees of freedom, and the λ_i are the noncentrality parameters of the noncentral χ^2 distributions.

The moment generating function and the cumulant generating function of X do not exist. However, the CDF of X can also be computed by writing

$$\text{cdf}_X(x) = \Pr(X \le x) = \Pr\left(\frac{n_2}{n_1}U_1 - xU_2 \le 0\right) = \Pr\left(Y_x \le 0\right),$$

where Y_x is the so-defined linear combination of U_1 and U_2, and then using the inversion methods for weighted sums. In the following equations, we use these definitions:

$l_1 = n_2/n_1$, $l_2 = -x$, $v_1 = 1/(1-2sl_1)$, $v_2 = 1/(1-2sl_2)$, $g_1 = l_1 v_1$, $g_2 = l_2 v_2$, $c_j = 1$ for $j = 1$ and $c_j = 2(j-1)c_{j-1}$ for $j > 1$.

$K_{Y_x}(s)$, the cumulant generating function, and its j^{th} derivatives, $K^{(j)}_{Y_x}(s), j = 1 \ldots k$, of a random variable Y_x, are defined as:

$$K_{Y_x}(s) = \tfrac{1}{2}n_1\log(v_1) + \tfrac{1}{2}n_2\log(v_2) + s(\lambda_1 g_1 + \lambda_2 g_2)$$

$$K_{Y_x}^{(j)}(s) = c_j \left(g_1^j \left(n_1 + j\lambda_1 v_1 \right) + g_2^j \left(n_2 + j\lambda_2 v_2 \right) \right).$$

saddlepoint central

Returns the solution $\hat{s}$ of the saddlepoint equation $K_{Y_x}^{(1)}(\hat{s}) = 0$, which can be obtained in closed form

$$\hat{s_0} = \frac{n_1(f-1)}{2f(n_1+n_2}$$

saddlepoint noncentral

Returns the solution $\hat{s}$ of the saddlepoint equation $K_{Y_x}^{(1)}(\hat{s}) = 0$, which can be obtained in closed form

$$\hat{s_1} = \left(xn_1(n_1 + 2n_2 + \lambda) - n_1 n_2 - \sqrt{n_1 a_2} \right) / a_1, \quad \text{where } a_1 = 4n_2 x(n1 + n2),$$

$$a_2 = x^2 n_1^3 + 2x^2 n_1^2 \lambda + 2n_1^2 x n_2 + 4x^2 n_1 n_2 \lambda + n_1 \lambda^2 x^2 + 2n_1 \lambda x n_2 + n_2^2 n_1 + 4x n_2^2 \lambda.$$

saddlepoint doubly noncentral

The solution $\hat{s}$ of the saddlepoint equation $K_{Y_x}^{(1)}(\hat{s}) = 0$, which can be obtained in closed form

$$\hat{s_2} = -2p \cos\left(\tfrac{1}{3} \arccos(-\tfrac{1}{2} q p^{-3}) + \tfrac{1}{3}\pi \right) - a_2, \quad \text{where}$$

$p^2 = |3a_2^2 - a_1|/3$, $q = a_2(2a_2^2 - a_1) + a_0$, $a = 8x^2 n_2^2 (n_1 + n_2)$, $a_0 = (x\lambda_2 n_1^2 - (1-x) n_1^2 n_2 - n_1 n_2 \lambda_1)/a$,

$a_1 = (2(n_2^2 n_1 + n_1^2 n_2 x^2) - 4x n_1 n_2 (n_1 + n_2 + \lambda_1 + \lambda_2))/a$,

$a_2 = (8x(1-x) n_1 n_2^2 + 4x(n_2^3 + \lambda_2 n_2^2 - n_1^2 n_2 x - n_1 n_2 \lambda_1 x))/(3a)$.

While the PDF of X cannot be obtained directly from the above, it can be obtained from the CDF a follows: Let the density $g_{m,n}$ be that of m/n times an $F_{m,n}$ random variable. Let $G_{m,n}(y)$ be its distribution function, and let $g_{m,n}^{\lambda_1,\lambda_2}$ and $G_{m,n}^{\lambda_1,\lambda_2}(y)$ be the density and distribution function of its doubly noncentral version (the distribution of $\chi_m^2(\lambda_1)/\chi_n^2(\lambda_2)$). Then the following recurrence relations hold citep{Chattamvelli_1995}

$$n \left[G_{m,n+2}^{\lambda}(y) - G_{m-2,n+2}^{\lambda}(y) \right] = -2 g_{m,n}^{\lambda}(y)$$

`ctx.`**`fisher_f_nc2_spa_inv`**(*q*, *m*, *n*, *lambda1*, *lambda2*, *results='cdf'*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Calculates the inverse Jensen saddlepoint approximation of the qtf and isf.

4.10 Distributions related to multiple comparisons of means

4.10.1 Overview and literature

See also: Hahn and Hendrickson [359], Narula [420], Stoline and Ury [505], Tong [781], Genz *et al.* [345].

See also: Bechhofer and Dunnett [26]

See also: Genz and Bretz [344]

See also: Genz *et al.* [345]

See also: Hahn and Hendrickson [359]

See also: Narula [420]

See also: Stoline and Ury [505]

See also: Tong [781]

For tables see Soong [502].

For tables see David [197].

For tables see David *et al.* [198].

An n-dimensional random variable $\mathbf{X}$ with mean vector $\boldsymbol{\mu}$ and covariance matrix $\boldsymbol{\Sigma}$ is said to have a nonsingular multivariate normal distribution, in symbols $\boldsymbol{X} \sim \mathcal{N}_n(\boldsymbol{\mu}, \boldsymbol{\Sigma})$, if $\boldsymbol{\Sigma}$ is positive definite, and the density function of $\mathbf{X}$ is of the form (see Tong 1990):

$$f(\boldsymbol{x}; \boldsymbol{\mu}, \boldsymbol{\Sigma}) = \frac{1}{(2\pi)^{n/2}|\boldsymbol{\Sigma}|^{1/2}} e^{-Q_n(\boldsymbol{x};\boldsymbol{\mu},\boldsymbol{\Sigma})/2}, \quad \boldsymbol{x} \in \Re^n$$

where

$$Q_n(\boldsymbol{x}; \boldsymbol{\mu}, \boldsymbol{\Sigma}) = (\boldsymbol{x} - \boldsymbol{\mu})'\boldsymbol{\Sigma}^{-1}(\boldsymbol{x} - \boldsymbol{\mu}).$$

The notion of cumulative distribution function (cdf) in one dimension can be extended to the multidimensional case, based on rectangular regions. We define the cdf $F(\mathbf{x})$ of a random vector $\mathbf{X}$ as the probability that all components $\mathbf{X}$ are less than or equal to the corresponding values in the vector $\mathbf{x}$:

$$F(\mathbf{x}) = \mathbb{P}(\mathbf{X} \leq \mathbf{x}), \quad \text{where } \mathbf{X} \sim \mathcal{N}(\boldsymbol{\mu}, \boldsymbol{\Sigma}).$$

See also: Genz(2009), Bretz(2003).

Let $\boldsymbol{R} = (\rho_{ij})$ be an $n \times n$ symmetric matrix such that it is either positive definite or positive semidefinite and $\rho_{ii} = 1 (i = 1, \ldots, n)$. Let $\mathbf{Z} = (Z_1, \ldots, Z_n)'$ have an $\mathcal{N}_n(\mathbf{0}, \boldsymbol{R})$ distribution, and let the univariate variable S be such that S is independent of $\boldsymbol{Z}$, and νS^2 has a $\chi^2(\nu)$ distribution. Then a natural generalization of the Student's t variable is

$$\boldsymbol{t} = (t_1, \ldots, t_n)' = \left(\frac{Z_1}{S}, \ldots, \frac{Z_n}{S}\right)'.$$

If $\boldsymbol{R}$ is positive definite, then the density of $\boldsymbol{t}$ (with correlation matrix $\boldsymbol{R}$ and degrees of freedom ν) is given by citep{Tong_1990}:

$$h(\boldsymbol{t}; \boldsymbol{R}, \nu) = \frac{\Gamma((n+\nu)/2)}{(\nu\pi)^{n/2}\Gamma(\nu/2)|\boldsymbol{R}|^{1/2}} \left(1 + \frac{1}{\nu}\boldsymbol{t}'\boldsymbol{R}^{-1}\boldsymbol{t}\right)^{-(n+\nu)/2}, \quad \boldsymbol{t} \in \Re^n.$$

The notion of cumulative distribution function (cdf) in one dimension can be extended to the multidimensional case, based on rectangular regions. We define the cdf $F(\mathbf{x})$ of a random vector $\mathbf{X}$ as the probability that all components $\mathbf{X}$ are less than or equal to the corresponding values in the vector $\mathbf{x}$:

$$F(\mathbf{x}) = \mathbb{P}(\mathbf{X} \leq \mathbf{x}), \quad \text{where } \mathbf{X} \sim \mathcal{N}(\boldsymbol{\mu}, \boldsymbol{\Sigma}).$$

See also: Genz(2009), Bretz(2003).

4.10.2 Normal maximum distribution, $\rho_{ij,i\neq j} = \rho$

class ctx.**dist_nmax_rho**(*rho*, *k*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The distribution of the maximum of $k \geq 2$ correlated standard normal variates, with common correlation $0 \leq \rho \leq 1$ is a continuous distribution with support interval $(-\infty, +\infty)$. See also Dunnett [290], Bechhofer and Dunnett [26], Grubbs [352], Bechhofer and Dunnett [26], Stoline and Ury [505], and Hahn and Hendrickson [359].

dist_nmax_rho.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following the distribution of the maximum of $k \geq 2$ correlated standard normal variables:

$$\mathrm{pdf}_X(x) = f_{\mathrm{nmax_corr}}(x, \rho, k) = \frac{k}{b} \int_{-\infty}^{\infty} (\Phi(z_1))^{k-1} \, \phi(z_1) \, \phi(y) \, \mathrm{d}y, \quad \text{where}$$

$$z_1 = \frac{x + a}{b}, \quad a = y\sqrt{|\rho|}, \quad b = \sqrt{1 - \rho}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", mp_dunnett_t(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_nmax_rho.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following the distribution of the maximum of $k \geq 2$ correlated standard normal variables:

$$\mathrm{cdf}_X(x) = F_{\mathrm{nmax_corr}}(x, \rho, k) = \int_{-\infty}^{\infty} \left[\Phi\left(\frac{x + \sqrt{|\rho|}y}{\sqrt{1 - \rho}} \right) \right]^n \phi(y) \mathrm{d}y$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", mp_dunnett_t(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_nmax_rho.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function function (sf) of a random variable X, following the distribution of the maximum of $k \geq 2$ correlated standard normal variables:

$$\mathrm{sf}_X(x) = 1 - \int_{-\infty}^{\infty} \left[\Phi\left(\frac{x + \sqrt{|\rho|}y}{\sqrt{1 - \rho}} \right) \right]^n \phi(y) \mathrm{d}y$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", mp_dunnett_t(mu, sigma).pdf(x))
sf: 6.35635234625645256156156145613 56E-20
```

dist_nmax_rho.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function function (qtf) of a random variable X, following the distribution of the maximum of $k \geq 2$ correlated standard normal variables:

There is no known explicit form for the quantile function $\text{cdf}_X^{-1}(x)$: It is computed using Newton iterations with starting values from a central F approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", mp_dunnett_t(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_nmax_rho.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function function (isf) of a random variable X, following the distribution of the maximum of $k \geq 2$ correlated standard normal variables:

$$\text{isf}_X(q) = \text{qtf}_X(1-q) = \text{cdf}_X^{-1}(1-q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", mp_dunnett_t(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_nmax_rho.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following the distribution of the maximum of $k \geq 2$ correlated standard normal variables:

$$C_X(t) = \int_0^\infty e^{itx} \text{pdf}_X(x) \mathrm{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", mp_dunnett_t(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_nmax_rho.**m_x**(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following the distribution of the maximum of $k \geq 2$ correlated standard normal variables:

$$M_X(t) = \int_0^\infty e^{tx} \text{pdf}_X(x) \mathrm{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", mp_studentized_range(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_nmax_rho.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following the distribution of the maximum of $k \geq 2$ correlated standard normal variables:

$$K_X(t) = \log\left(M_X(t)\right)$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", mp_studentized_range(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_nmax_rho.**moments**(*k*)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following the distribution of the maximum of $k \geq 2$ correlated standard normal variables.

$$\mu'_X(r) = E(X^r) = \int_0^\infty x^r \mathrm{pdf}_X(x)\mathrm{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", mp_dunnett_t(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_nmax_rho.**cumulants**(*k*)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following the distribution of the maximum of $k \geq 2$ correlated standard normal variables. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", mp_dunnett_t(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

4.10.3 Normal maximum modulus distribution, $\rho_{ij,i\neq j} = \rho$

class ctx.**dist_nmm_rho**(*rho*, *k*, ***kwargs*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The distribution of the maximum of the absolute value of $k \geq 2$ correlated standard normal variates, with common correlation $0 \leq \rho \leq 1$ is a continuous distribution with support interval $(-\infty, +\infty)$. See also Dunnett [290], Bechhofer and Dunnett [26], Grubbs [352], Bechhofer and Dunnett [26], Stoline and Ury [505], and Hahn and Hendrickson [359].

dist_nmm_rho.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following the distribution of the maximum of the absolute value of $k \geq 2$ correlated standard normal variables:

$$\text{pdf}_X(x) = \frac{k}{b} \int_{-\infty}^{\infty} \left(\Phi(z_1) - \Phi(z_2)\right)^{k-1} \left(\phi(z_1) + \phi(z_1)\right) \phi(y)\, \mathrm{d}y, \quad \text{where}$$

$$z_1 = \frac{x+a}{b}, z_2 = \frac{-x+a}{b}, \quad a = y\sqrt{|\rho|}, \quad b = \sqrt{1-\rho}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", mp_dunnett_t(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_nmm_rho.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following the distribution of the maximum of the absolute value of $k \geq 2$ correlated standard normal variables:

$$\text{cdf}_X(x) = \int_{-\infty}^{\infty} \left[\Phi\left(\frac{x+\sqrt{|\rho|}y}{\sqrt{1-\rho}}\right) - \Phi\left(\frac{-x+\sqrt{|\rho|}y}{\sqrt{1-\rho}}\right)\right]^k \phi(y)\mathrm{d}y$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", mp_dunnett_t(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_nmm_rho.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function function (sf) of a random variable X, following the distribution of the maximum of the absolute value of $k \geq 2$ correlated standard normal variables:

$$\text{sf}_X(x) = 1 - \int_{-\infty}^{\infty} \left[\Phi\left(\frac{x+\sqrt{|\rho|}y}{\sqrt{1-\rho}}\right) - \Phi\left(\frac{-x+\sqrt{|\rho|}y}{\sqrt{1-\rho}}\right)\right]^k \phi(y)\mathrm{d}y$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", mp_dunnett_t(mu, sigma).pdf(x))
sf: 6.35635234625645256156156145613 56E-20
```

dist_nmm_rho.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function function (qtf) of a random variable X, following the distribution of the maximum of the absolute value of $k \geq 2$ correlated standard normal variables:

There is no known explicit form for the quantile function $\text{cdf}_X^{-1}(x)$: It is computed using Newton iterations with starting values from a central F approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", mp_dunnett_t(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_nmm_rho.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function function (isf) of a random variable X, following the distribution of the maximum of the absolute value of $k \geq 2$ correlated standard normal variables:

$$\text{isf}_X(q) = \text{qtf}_X(1-q) = \text{cdf}_X^{-1}(1-q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", mp_dunnett_t(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_nmm_rho.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following the distribution of the maximum of the absolute value of $k \geq 2$ correlated standard normal variables:

$$C_X(t) = \int_0^\infty e^{itx} \text{pdf}_X(x) \mathrm{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", mp_dunnett_t(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_nmm_rho.**m_x**(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following the distribution of the maximum of the absolute value of $k \geq 2$ correlated standard normal variables:

$$M_X(t) = \int_0^\infty e^{tx} \text{pdf}_X(x) \mathrm{d}x$$

dist_nmm_rho.**k_x**(t, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following the distribution of the maximum of the absolute value of $k \geq 2$ correlated standard normal variables:

$$K_X(t) = \log\left(M_X(t)\right)$$

dist_nmm_rho.**moments**(k)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following the distribution of the maximum of the absolute value of $k \geq 2$ correlated standard normal variables.

$$\mu'_X(r) = E(X^r) = \int_0^\infty x^r \mathrm{pdf}_X(x)\mathrm{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", mp_dunnett_t(mu, sigma).moments(k))
6.3563523462564525615615615614561356E+00
```

dist_nmm_rho.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following the distribution of the maximum of the absolute value of $k \geq 2$ correlated standard normal variables. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", mp_dunnett_t(mu, sigma).cumulants(k))
6.3563523462564525615615615614561356E+00
```

4.10.4 Normal maximum distribution, $\rho_{ij,i\neq j} = \lambda_i \lambda_j$

class ctx.**dist_nmax_rhoij**(*rho*, *k*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The distribution of the maximum of $k \geq 2$ correlated standard normal variates, with common correlation $0 \leq \rho \leq 1$ is a continuous distribution with support interval $(-\infty, +\infty)$. See also Dunnett [290], Bechhofer and Dunnett [26], Grubbs [352], Bechhofer and Dunnett [26], Stoline and Ury [505], and Hahn and Hendrickson [359].

dist_nmax_rhoij.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following the distribution of the maximum of $k \geq 2$ correlated standard normal variables:

$$\text{pdf}_X(x) = f_{\text{nmaxrhoij}}(x, \rho, k) = \frac{k}{b} \int_{-\infty}^{\infty} (\Phi(z_1))^{k-1} \, \phi(z_1) \, \phi(y) \, \mathrm{d}y, \quad \text{where}$$

$$z_1 = \frac{x + a}{b}, \quad a = y\sqrt{|\rho|}, \quad b = \sqrt{1 - \rho}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", mp_dunnett_t(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_nmax_rhoij.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following the distribution of the maximum of $k \geq 2$ correlated standard normal variables:

$$\text{cdf}_X(x) = F_{\text{nmaxrhoij}}(x, \rho, k) = \int_{-\infty}^{\infty} \left[\Phi\left(\frac{x + \sqrt{|\rho|}y}{\sqrt{1-\rho}} \right) \right]^n \phi(y) \mathrm{d}y$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", mp_dunnett_t(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_nmax_rhoij.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function function (sf) of a random variable X, following the distribution of the maximum of $k \geq 2$ correlated standard normal variables:

$$\text{sf}_X(x) = 1 - \int_{-\infty}^{\infty} \left[\Phi\left(\frac{x + \sqrt{|\rho|}y}{\sqrt{1-\rho}} \right) \right]^n \phi(y) \mathrm{d}y$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", mp_dunnett_t(mu, sigma).pdf(x))
sf: 6.35635234625645256156156145613 56E-20
```

dist_nmax_rhoij.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function function (qtf) of a random variable X, following the distribution of the maximum of $k \geq 2$ correlated standard normal variables:

There is no known explicit form for the quantile function $\text{cdf}_X^{-1}(x)$: It is computed using Newton iterations with starting values from a central F approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", mp_dunnett_t(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_nmax_rhoij.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function function (isf) of a random variable X, following the distribution of the maximum of $k \geq 2$ correlated standard normal variables:

$$\text{isf}_X(q) = \text{qtf}_X(1-q) = \text{cdf}_X^{-1}(1-q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", mp_dunnett_t(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_nmax_rhoij.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following the distribution of the maximum of $k \geq 2$ correlated standard normal variables:

$$C_X(t) = \int_0^\infty e^{itx} \text{pdf}_X(x) \mathrm{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", mp_dunnett_t(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_nmax_rhoij.**m_x**(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following the distribution of the maximum of $k \geq 2$ correlated standard normal variables:

$$M_X(t) = \int_0^\infty e^{tx} \text{pdf}_X(x) \mathrm{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", mp_studentized_range(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_nmax_rhoij.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following the distribution of the maximum of $k \geq 2$ correlated standard normal variables:

$$K_X(t) = \log\left(M_X(t)\right)$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", mp_studentized_range(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_nmax_rhoij.**moments**(*k*)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following the distribution of the maximum of $k \geq 2$ correlated standard normal variables.

$$\mu'_X(r) = E(X^r) = \int_0^\infty x^r \mathrm{pdf}_X(x)\mathrm{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", mp_dunnett_t(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_nmax_rhoij.**cumulants**(*k*)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following the distribution of the maximum of $k \geq 2$ correlated standard normal variables. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", mp_dunnett_t(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

4.10.5 Normal maximum modulus distribution, $\rho_{ij,i\neq j} = \lambda_i \lambda_j$

class ctx.**dist_nmm_rhoij**(*rho*, *k*, ***kwargs*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The distribution of the maximum of the absolute value of $k \geq 2$ correlated standard normal variates, with common correlation $0 \leq \rho \leq 1$ is a continuous distribution with support interval $(-\infty, +\infty)$. See also Dunnett [290], Bechhofer and Dunnett [26], Grubbs [352], Bechhofer and Dunnett [26], Stoline and Ury [505], and Hahn and Hendrickson [359].

dist_nmm_rhoij.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following the distribution of the maximum of the absolute value of $k \geq 2$ correlated standard normal variables:

$$\text{pdf}_X(x) = \frac{k}{b} \int_{-\infty}^{\infty} \left(\Phi(z_1) - \Phi(z_2)\right)^{k-1} \left(\phi(z_1) + \phi(z_1)\right) \phi(y)\, \mathrm{d}y, \quad \text{where}$$

$$z_1 = \frac{x+a}{b}, z_2 = \frac{-x+a}{b}, \quad a = y\sqrt{|\rho|}, \quad b = \sqrt{1-\rho}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", mp_dunnett_t(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_nmm_rhoij.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following the distribution of the maximum of the absolute value of $k \geq 2$ correlated standard normal variables:

$$\text{cdf}_X(x) = \int_{-\infty}^{\infty} \left[\Phi\left(\frac{x+\sqrt{|\rho|}y}{\sqrt{1-\rho}}\right) - \Phi\left(\frac{-x+\sqrt{|\rho|}y}{\sqrt{1-\rho}}\right)\right]^k \phi(y)\mathrm{d}y$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", mp_dunnett_t(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_nmm_rhoij.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function function (sf) of a random variable X, following the distribution of the maximum of the absolute value of $k \geq 2$ correlated standard normal variables:

$$\text{sf}_X(x) = 1 - \int_{-\infty}^{\infty} \left[\Phi\left(\frac{x+\sqrt{|\rho|}y}{\sqrt{1-\rho}}\right) - \Phi\left(\frac{-x+\sqrt{|\rho|}y}{\sqrt{1-\rho}}\right)\right]^k \phi(y)\mathrm{d}y$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", mp_dunnett_t(mu, sigma).pdf(x))
sf: 6.35635234625645256156156145613 56E-20
```

dist_nmm_rhoij.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function function (qtf) of a random variable X, following the distribution of the maximum of the absolute value of $k \geq 2$ correlated standard normal variables:

There is no known explicit form for the quantile function $\text{cdf}_X^{-1}(x)$: It is computed using Newton iterations with starting values from a central F approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", mp_dunnett_t(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_nmm_rhoij.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function function (isf) of a random variable X, following the distribution of the maximum of the absolute value of $k \geq 2$ correlated standard normal variables:

$$\text{isf}_X(q) = \text{qtf}_X(1-q) = \text{cdf}_X^{-1}(1-q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", mp_dunnett_t(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_nmm_rhoij.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following the distribution of the maximum of the absolute value of $k \geq 2$ correlated standard normal variables:

$$C_X(t) = \int_0^\infty e^{itx} \text{pdf}_X(x) \mathrm{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", mp_dunnett_t(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_nmm_rhoij.**m_x**(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following the distribution of the maximum of the absolute value of $k \geq 2$ correlated standard normal variables:

$$M_X(t) = \int_0^\infty e^{tx} \text{pdf}_X(x) \mathrm{d}x$$

dist_nmm_rhoij.**k_x**(t, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following the distribution of the maximum of the absolute value of $k \geq 2$ correlated standard normal variables:

$$K_X(t) = \log\left(M_X(t)\right)$$

dist_nmm_rhoij.**moments**(k)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following the distribution of the maximum of the absolute value of $k \geq 2$ correlated standard normal variables.

$$\mu'_X(r) = E(X^r) = \int_0^\infty x^r \text{pdf}_X(x) \text{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", mp_dunnett_t(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_nmm_rhoij.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following the distribution of the maximum of the absolute value of $k \geq 2$ correlated standard normal variables. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", mp_dunnett_t(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

4.10.6 Normal range distribution

class ctx.**dist_normal_range**(k)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The normal range distribution is a continuous probability distribution with $k \geq 2$ groups, and the support interval $(0, +\infty)$. See also Wikipedia [1213], Harter [362], R (Statistical System) [533], and *dist_normal_range()*.

dist_normal_range.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a central normal range distribution:

$$\mathrm{pdf}_X(x) = k(k-1)\int_{-\infty}^{\infty} (\Phi(y) - \Phi(y-x))^{k-2}\,\phi(y)\phi(y-x)\mathrm{d}y.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", mp_normal_range(mu, sigma).pdf(x))
6.356352346256452561561561456135 6E-20
```

dist_normal_range.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a central normal range distribution:

$$\mathrm{cdf}_X(x) = k\int_{-\infty}^{\infty} \phi(y)\,(\Phi(y) - \Phi(y-x))^{k-1}\,\mathrm{d}y.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", mp_normal_range(mu, sigma).pdf(x))
6.356352346256452561561561456135 6E-20
```

dist_normal_range.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function function (sf) of a random variable X, following a central normal range distribution:

$$\mathrm{sf}_X(x) = 1 - \mathrm{cdf}_X(x) = k\int_{-\infty}^{\infty} \phi(y)\left(L_1^k - : cite : t : `L_1 - L_2\right]^{k-1}\right)\mathrm{d}y, \quad \text{where}$$

$$L_1 = \Phi(y), \quad L_2 = \Phi(y-x), \quad L_2 \to 0 \text{ for } x \to \infty$$

$$L_1^k - (L_1 - L_2)^k = L_1^k\left(1 - \left(1 - \frac{L_2}{L_1}\right)^k\right)$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", mp_normal_range(mu, sigma).pdf(x))
sf: 6.356352346256452561561561456135 6E-20
```

dist_normal_range.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function function (qtf) of a random variable X, following a central normal range distribution:

There is no known explicit form for the quantile function $\text{qtf}_X(x)$: It is computed using Newton iterations with starting values from a central F approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", mp_normal_range(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_normal_range.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function function (isf) of a random variable X, following a central normal range distribution:

There is no known explicit form for the quantile function $\text{isf}_X(x)$: It is computed using Newton iterations with starting values from a central F approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", mp_normal_range(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_normal_range.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following a central normal range distribution:

$$C_X(t) = \int_0^{\infty} e^{itx} \text{pdf}_X(x) \text{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", mp_normal_range(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_normal_range.**m_x**(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following a central normal range distribution:

$$M_X(t) = \int_0^{\infty} e^{tx} \text{pdf}_X(x) \text{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", mp_normal_range(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_normal_range.**k_x**(t, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following a central normal range distribution:

$$K_X(t) = \log\left(M_X(t)\right)$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", mp_normal_range(mu, sigma).c_x(t))
6.356352346256452561561561561456 1356E+00
```

dist_normal_range.**moments**(k)

Returns the first j raw moments, $\mu_j, j = 1 \dots k$, of a random variable X, following a central normal range distribution. The rth moments only exists for $n_2 > 2r$.

$$\mu'_X(r) = E(X^r) = \int_0^\infty x^r \mathrm{pdf}_X(x) \mathrm{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", mp_normal_range(mu, sigma).moments(k))
6.356352346256452561561561561456 1356E+00
```

dist_normal_range.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \dots k$, of a random variable X, following a central normal range distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", mp_normal_range(mu, sigma).cumulants(k))
6.356352346256452561561561561456 1356E+00
```

Additional information

$$Q(x) = k \int_{-\infty}^{\infty} \phi(y) \left(\Phi(y) - \Phi(y - x)\right)^{k-1} \mathrm{d}y$$

$$P(x) = 1 - Q(x) = k \int_{-\infty}^{\infty} \phi(y) \left(L_1^k - : cite : t : `L_1 - L_2\right]^{k-1}) \mathrm{d}y, \quad \text{where}$$

$$L_1 = \Phi(y), \quad L_2 = \Phi(y - x), \quad L_2 \to 0 \text{ for } x \to \infty$$

$$L_1^k - (L_1 - L_2)^k = L_1^k \left(1 - \left(1 - \frac{L_2}{L_1}\right)^k\right)$$

4.10.7 Studentized maximum distribution

class ctx.**dist_smax**(*k*, *nu*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The studentized maximum distribution with $k \geq 1$ groups and ν error degrees of freedom is a continuous distribution with the support interval $(-\infty, +\infty)$. See also Stoline and Ury [505], Hochberg and Tamhane [371], Narula [420], Bechhofer and Dunnett [26], and Hahn and Hendrickson [359].

Let $X_1, \ldots, X_k$ be a random sample of size k from a $\mathcal{N}(0, \sigma^2)$ distribution. Let s^2 be an independent mean square estimate of σ with n degrees of freedom. Then

$$Q = \frac{\max X_j}{s}, \quad j = 1, \ldots, k$$

has a Studentized Maximum distribution with k and n degrees of freedom.

dist_smax.**pdf**(*x*)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a studentized maximum distribution:

$$\text{pdf}_X(x) = \int_0^\infty f_{\text{nnax}}(sx, k) \cdot s\sqrt{\nu} \cdot f_\chi\left(s\sqrt{\nu}, \nu\right)\, \mathrm{d}s$$

where $f_{\text{nnax}}(\cdot, k)$ is the pdf of the normal maximum with k groups, and $f_\chi(\cdot, \nu)$ is the pdf of the χ-distribution with ν degrees of freedom.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", smax(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_smax.**cdf**(*x*)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a studentized maximum distribution:

$$\text{cdf}_X(x) = \int_0^\infty F_{\text{nnax}}(sx, k) \cdot \sqrt{\nu} \cdot f_\chi\left(s\sqrt{\nu}, \nu\right)\, \mathrm{d}s$$

where $F_{\text{nnax}}(\cdot, k)$ is the cdf of the normal maximum with k groups, and $f_\chi(\cdot, \nu)$ is the pdf of the χ-distribution with ν degrees of freedom.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", smax(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_smax.**sf**(*x*)

Returns $\text{sf}_X(x)$, the survival function function (sf) of a random variable X, following a studentized maximum distribution:

$$\text{sf}_X(x) = 1 - \int_0^\infty F_{\text{nnax}}(sx, k) \cdot \sqrt{\nu} \cdot f_\chi\left(s\sqrt{\nu}, \nu\right)\, \mathrm{d}s$$

where $F_{\text{nnax}}(\cdot, k)$ is the cdf of the normal maximum with k groups, and $f_\chi(\cdot, \nu)$ is the pdf of the χ-distribution with ν degrees of freedom.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", smax(mu, sigma).pdf(x))
sf: 6.356352346256452561561561561456135 6E-20
```

dist_smax.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function function (qtf) of a random variable X, following a studentized maximum distribution:

There is no known explicit form for the quantile function $\text{qtf}_X(x)$: It is computed using Newton iterations with starting values from a central F approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", smax(mu, sigma).qtf(q))
qtf: 6.356352346256452561561561561456135 6E+00
```

dist_smax.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function function (isf) of a random variable X, following a studentized maximum distribution:

There is no known explicit form for the quantile function $\text{isf}_X(x)$: It is computed using Newton iterations with starting values from a central F approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", smax(mu, sigma).isf(q))
6.356352346256452561561561561456135 6E+00
```

dist_smax.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following a studentized maximum distribution:

$$C_X(t) = \int_0^\infty e^{itx} \text{pdf}_X(x) \mathrm{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", smax(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

dist_smax.**m_x**(t)

Returns `NaN`, since the moment generating function does not exist.

dist_smax.**k_x**(t, *k=0*)

Returns `NaN`, since the cumulant generating function does not exist.

dist_smax.**moments**(k)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following a studentized maximum distribution. The rth moments only exists for $n_2 > 2r$.

$$\mu'_X(r) = E(X^r) = \int_0^\infty x^r \text{pdf}_X(x) \text{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", smax(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_smax.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following a studentized maximum distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", smax(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

4.10.8 Studentized maximum modulus distribution

class ctx.**dist_smm**(k, *nu*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The studentized maximum modulus distribution with $k \geq 1$ groups and ν error degrees of freedom is a continuous distribution with the support interval $(-\infty, +\infty)$. See also Stoline and Ury [505], Hochberg and Tamhane [371], Narula [420], Bechhofer and Dunnett [26], and Hahn and Hendrickson [359].

Let $X_1, \ldots, X_k$ be a random sample of size k from a $\mathcal{N}(0, \sigma^2)$ distribution. Let s^2 be an independent mean square estimate of σ with n degrees of freedom. Then

$$Q = \frac{\max|X_j|}{s}, \quad j = 1, \ldots, k$$

has a Studentized Maximum Modulus distribution with k and n degrees of freedom.

dist_smm.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a studentized maximum modulus distribution:

$$\mathrm{pdf}_X(x) = \int_0^\infty f_{\mathrm{nmm}}(sx, k) \cdot s\sqrt{\nu} \cdot f_\chi\left(s\sqrt{\nu}, \nu\right)\, \mathrm{d}s$$

where $f_{\mathrm{nmm}}(\cdot, k)$ is the pdf of the normal maximum modulus with k groups, and $f_\chi(\cdot, \nu)$ is the pdf of the χ-distribution with ν degrees of freedom.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", smm(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_smm.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a studentized maximum modulus distribution:

$$\mathrm{cdf}_X(x) = \int_0^\infty F_{\mathrm{nmm}}(sx, k) \cdot \sqrt{\nu} \cdot f_\chi\left(s\sqrt{\nu}, \nu\right)\, \mathrm{d}s$$

where $F_{\mathrm{nmm}}(\cdot, k)$ is the cdf of the normal maximum modulus with k groups, and $f_\chi(\cdot, \nu)$ is the pdf of the χ-distribution with ν degrees of freedom.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", smm(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_smm.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function function (sf) of a random variable X, following a studentized maximum modulus distribution:

$$\mathrm{sf}_X(x) = 1 - \int_0^\infty F_{\mathrm{nmm}}(sx, k) \cdot \sqrt{\nu} \cdot f_\chi\left(s\sqrt{\nu}, \nu\right)\, \mathrm{d}s$$

where $F_{\mathrm{nmm}}(\cdot, k)$ is the cdf of the normal maximum modulus with k groups, and $f_\chi(\cdot, \nu)$ is the pdf of the χ-distribution with ν degrees of freedom.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", smm(mu, sigma).pdf(x))
sf: 6.356352346256452561561561561456135 6E-20
```

dist_smm.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function function (qtf) of a random variable X, following a studentized maximum modulus distribution:

There is no known explicit form for the quantile function $\text{qtf}_X(x)$: It is computed using Newton iterations with starting values from a central F approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", smm(mu, sigma).qtf(q))
qtf: 6.356352346256452561561561561456135 6E+00
```

dist_smm.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function function (isf) of a random variable X, following a studentized maximum modulus distribution:

There is no known explicit form for the quantile function $\text{isf}_X(x)$: It is computed using Newton iterations with starting values from a central F approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", smm(mu, sigma).isf(q))
6.356352346256452561561561561456135 6E+00
```

dist_smm.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following a studentized maximum modulus distribution:

$$C_X(t) = \int_0^\infty e^{itx} \text{pdf}_X(x) \mathrm{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", smm(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

dist_smm.**m_x**(t)

Returns `NaN`, since the moment generating function does not exist.

dist_smm.**k_x**(t, *k=0*)

Returns `NaN`, since the cumulant generating function does not exist.

dist_smm.**moments**(k)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following a studentized maximum modulus distribution. The rth moments only exists for $n_2 > 2r$.

$$\mu'_X(r) = E(X^r) = \int_0^\infty x^r \mathrm{pdf}_X(x)\mathrm{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", smm(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_smm.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following a studentized maximum modulus distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", smm(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

4.10.9 Distribution of Dunnett's t, one-sided

class ctx.**dist_dunnett1_t**(*rho*, *k*, *nu*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The 1-sided Dunnett t-distribution with common correlation ρ, $k \geq 2$ groups (including control group) and error degrees of freedom ν is a continuous distribution with the support interval $(-\infty, +\infty)$. See also Dunnett [290], Bechhofer and Dunnett [26].

Let $X_1, \ldots, X_k$ be a random sample of size k from a $\mathcal{N}(0, \sigma^2)$ distribution. Let s^2 be an independent mean square estimate of σ with n degrees of freedom. Then

$$Q = \frac{\max(X_1 - X_j)}{s}, \quad 1 < j < k$$

has a onesided Dunnett's t-distribution with k and n degrees of freedom.

For Dunnett's test:

$$\lambda_i = \frac{1}{\sqrt{1 + n_0/n_i}}$$

dist_dunnett1_t.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a 1-sided Dunnett t-distribution:

$$\mathrm{pdf}_X(x) = \int_0^\infty f_{\mathrm{nmax_corr}}(sx, \rho, k) \cdot s\sqrt{\nu} \cdot f_\chi\left(s\sqrt{\nu}, \nu\right)\, \mathrm{d}s$$

where $f_{\mathrm{nmax_corr}}(\cdot, \rho, k)$ is the pdf of the normal maximum (equicorrelated case) with common correlation ρ and k groups, and $f_\chi(\cdot, \nu)$ is the pdf of the χ-distribution with ν degrees of freedom.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", dunnett1_t(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_dunnett1_t.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a 1-sided Dunnett t-distribution:

$$\mathrm{cdf}_X(x) = \int_0^\infty F_{\mathrm{nmax_corr}}(sx, \rho, k) \cdot \sqrt{\nu} \cdot f_\chi\left(s\sqrt{\nu}, \nu\right)\, \mathrm{d}s$$

where $F_{\mathrm{nmax_corr}}(\cdot, \rho, k)$ is the cdf of the normal maximum (equicorrelated case) with common correlation ρ and k groups, and $f_\chi(\cdot, \nu)$ is the pdf of the χ-distribution with ν degrees of freedom.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", dunnett1_t(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_dunnett1_t.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function function (sf) of a random variable X, following a 1-sided Dunnett t-distribution:

$$\mathrm{sf}_X(x) = 1 - \int_0^\infty F_{\mathrm{nmax_corr}}(sx, \rho, k) \cdot \sqrt{\nu} \cdot f_\chi\left(s\sqrt{\nu}, \nu\right)\, \mathrm{d}s$$

where $F_{\mathrm{nmax_corr}}(\cdot, \rho, k)$ is the cdf of the normal maximum (equicorrelated case) with common correlation ρ and k groups, and $f_\chi(\cdot, \nu)$ is the pdf of the χ-distribution with ν degrees of freedom.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", dunnett1_t(mu, sigma).pdf(x))
sf: 6.356352346256452561561561561456135 6E-20
```

dist_dunnett1_t.**qtf**(q)

Returns $\mathrm{qtf}_X(x)$, the quantile function function (qtf) of a random variable X, following a 1-sided Dunnett t-distribution:

There is no known explicit form for the quantile function $\mathrm{qtf}_X(x)$: It is computed using Newton iterations with starting values from a central F approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", dunnett1_t(mu, sigma).qtf(q))
qtf: 6.356352346256452561561561561456135 6E+00
```

dist_dunnett1_t.**isf**(q)

Returns $\mathrm{isf}_X(q)$, the inverse survival function function (isf) of a random variable X, following a 1-sided Dunnett t-distribution:

There is no known explicit form for the quantile function $\mathrm{isf}_X(x)$: It is computed using Newton iterations with starting values from a central F approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", dunnett1_t(mu, sigma).isf(q))
6.356352346256452561561561561456135 6E+00
```

dist_dunnett1_t.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following a 1-sided Dunnett t-distribution:

$$C_X(t) = \int_0^\infty e^{itx} \mathrm{pdf}_X(x) \mathrm{d}x$$

where $U(\cdot)$ denotes the confluent hypergeometric function of the second kind.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", dunnett1_t(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

dist_dunnett1_t.**m_x**(*t*)

Returns NaN, since the moment generating function does not exist.

dist_dunnett1_t.**k_x**(*t*, *k=0*)

Returns NaN, since the cumulant generating function does not exist.

dist_dunnett1_t.**moments**(*k*)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following a 1-sided Dunnett t-distribution. The rth moments only exists for $n_2 > 2r$.

$$\mu'_X(r) = E(X^r) = \int_0^\infty x^r \mathrm{pdf}_X(x)\mathrm{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", dunnett1_t(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_dunnett1_t.**cumulants**(*k*)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following a 1-sided Dunnett t-distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", dunnett1_t(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

4.10.10 Distribution of Dunnett's t, two-sided

class ctx.**dist_dunnett2_t**(*rho*, *k*, *nu*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The 2-sided Dunnett t-distribution with common correlation ρ, $k \geq 2$ groups (including control group) and error degrees of freedom ν is a continuous distribution with the support interval $(0, +\infty)$. See also Dunnett [290], Bechhofer and Dunnett [26].

Let $X_1, \ldots, X_k$ be a random sample of size k from a $\mathcal{N}(0, \sigma^2)$ distribution. Let s^2 be an independent mean square estimate of σ with n degrees of freedom. Then

$$Q = \frac{\max|X_1 - X_j|}{s}, \quad 1 < j < k$$

has a twosided Dunnett's $|t|$-distribution with k and n degrees of freedom.

For Dunnett's test:

$$\lambda_i = \frac{1}{\sqrt{1 + n_0/n_i}}$$

dist_dunnett2_t.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a 2-sided Dunnett t-distribution:

$$\mathrm{pdf}_X(x) = \int_0^\infty f_{\mathrm{nmm_corr}}(sx, \rho, k) \cdot s\sqrt{\nu} \cdot f_\chi\left(s\sqrt{\nu}, \nu\right)\, \mathrm{d}s$$

where $f_{\mathrm{nmm_corr}}(\cdot, \rho, k)$ is the pdf of the normal maximum modulus (equicorrelated case) with common correlation ρ and k groups, and $f_\chi(\cdot, \nu)$ is the pdf of the χ-distribution with ν degrees of freedom.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", dunnett2_t(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_dunnett2_t.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a 2-sided Dunnett t-distribution:

$$\mathrm{cdf}_X(x) = \int_0^\infty F_{\mathrm{nmm_corr}}(sx, \rho, k)\sqrt{\nu} \cdot f_\chi\left(s\sqrt{\nu}, \nu\right)\, \mathrm{d}s$$

where $F_{\mathrm{nmm_corr}}(\cdot, \rho, k)$ is the cdf of the normal maximum modulus (equicorrelated case) with common correlation ρ and k groups, and $f_\chi(\cdot, \nu)$ is the pdf of the χ-distribution with ν degrees of freedom.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", dunnett2_t(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_dunnett2_t.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function function (sf) of a random variable X, following a 2-sided Dunnett t-distribution:

$$\mathrm{sf}_X(x) = 1 - \int_0^\infty F_{\mathrm{nmm_corr}}(sx, \rho, k)\sqrt{\nu} \cdot f_\chi\left(s\sqrt{\nu}, \nu\right)\, \mathrm{d}s$$

where $F_{\mathrm{nmm_corr}}(\cdot, \rho, k)$ is the cdf of the normal maximum modulus (equicorrelated case) with common correlation ρ and k groups, and $f_\chi(\cdot, \nu)$ is the pdf of the χ-distribution with ν degrees of freedom.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", dunnett2_t(mu, sigma).pdf(x))
sf: 6.3563523462564525615615615614561356E-20
```

`dist_dunnett2_t.qtf(`q`)`

Returns $\text{qtf}_X(x)$, the quantile function function (qtf) of a random variable X, following a 2-sided Dunnett t-distribution:

There is no known explicit form for the quantile function $\text{qtf}_X(x)$: It is computed using Newton iterations with starting values from a central F approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", dunnett2_t(mu, sigma).qtf(q))
qtf: 6.3563523462564525615615615614561356E+00
```

`dist_dunnett2_t.isf(`q`)`

Returns $\text{isf}_X(q)$, the inverse survival function function (isf) of a random variable X, following a 2-sided Dunnett t-distribution:

There is no known explicit form for the quantile function $\text{isf}_X(x)$: It is computed using Newton iterations with starting values from a central F approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", dunnett2_t(mu, sigma).isf(q))
6.3563523462564525615615615614561356E+00
```

`dist_dunnett2_t.c_x(`t`)`

Returns $C_X(t)$, the characteristic function of a random variable X, following a 2-sided Dunnett t-distribution:

$$C_X(t) = \int_0^{\infty} e^{itx} \text{pdf}_X(x) \mathrm{d}x$$

where $U(\cdot)$ denotes the confluent hypergeometric function of the second kind.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", dunnett2_t(mu, sigma).c_x(t))
6.3563523462564525615615615614561356E+00
```

`dist_dunnett2_t.m_x(`t`)`

Returns `NaN`, since the moment generating function does not exist.

`dist_dunnett2_t.k_x(`t, *k=0*`)`

Returns `NaN`, since the cumulant generating function does not exist.

dist_dunnett2_t.**moments**(k)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following a 2-sided Dunnett t-distribution. The rth moments only exists for $n_2 > 2r$.

$$\mu'_X(r) = E(X^r) = \int_0^\infty x^r \text{pdf}_X(x) \text{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", dunnett2_t(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_dunnett2_t.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following a 2-sided Dunnett t-distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", dunnett2_t(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

4.10.11 Nair's t-distribution

class ctx.**dist_nair_t**(*rho*, *k*, *nu*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The Nair t-distribution with common correlation ρ, $k \geq 2$ groups (including control group) and error degrees of freedom ν is a continuous distribution with the support interval $(-\infty, +\infty)$. See also Dunnett [290], Bechhofer and Dunnett [26].

Let $X_1, \ldots, X_k$ be a random sample of size k from a $\mathcal{N}(0, \sigma^2)$ distribution. Let s^2 be an independent mean square estimate of σ with n degrees of freedom. Then

$$Q = \frac{\max(X_1 - X_j)}{s}, \quad 1 < j < k$$

has a Nair t-distribution with k and n degrees of freedom.

For Dunnett's test:

$$\lambda_i = \frac{1}{\sqrt{1 + n_0/n_i}}$$

dist_nair_t.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a Nair t-distribution:

$$\text{pdf}_X(x) = \int_0^\infty f_{\text{nmax_corr}}(sx, \rho, k) \cdot s\sqrt{\nu} \cdot f_\chi\left(s\sqrt{\nu}, \nu\right)\, \mathrm{d}s$$

where $f_{\text{nmax_corr}}(\cdot, \rho, k)$ is the pdf of the normal maximum (equicorrelated case) with common correlation ρ and k groups, and $f_\chi(\cdot, \nu)$ is the pdf of the χ-distribution with ν degrees of freedom.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", nair_t(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_nair_t.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a Nair t-distribution:

$$\text{cdf}_X(x) = \int_0^\infty F_{\text{nmax_corr}}(sx, \rho, k) \cdot \sqrt{\nu} \cdot f_\chi\left(s\sqrt{\nu}, \nu\right)\, \mathrm{d}s$$

where $F_{\text{nmax_corr}}(\cdot, \rho, k)$ is the cdf of the normal maximum (equicorrelated case) with common correlation ρ and k groups , and $f_\chi(\cdot, \nu)$ is the pdf of the χ-distribution with ν degrees of freedom.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", nair_t(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_nair_t.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function function (sf) of a random variable X, following a Nair t-distribution:

$$\text{sf}_X(x) = 1 - \int_0^\infty F_{\text{nmax_corr}}(sx, \rho, k) \cdot \sqrt{\nu} \cdot f_\chi\left(s\sqrt{\nu}, \nu\right)\, \mathrm{d}s$$

where $F_{\text{nmax_corr}}(\cdot, \rho, k)$ is the cdf of the normal maximum (equicorrelated case) with common correlation ρ and k groups, and $f_\chi(\cdot, \nu)$ is the pdf of the χ-distribution with ν degrees of freedom.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", nair_t(mu, sigma).pdf(x))
sf: 6.35635234625645256156156145613 56E-20
```

dist_nair_t.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function function (qtf) of a random variable X, following a Nair t-distribution:

There is no known explicit form for the quantile function $\text{qtf}_X(x)$: It is computed using Newton iterations with starting values from a central F approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", nair_t(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_nair_t.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function function (isf) of a random variable X, following a Nair t-distribution:

There is no known explicit form for the quantile function $\text{isf}_X(x)$: It is computed using Newton iterations with starting values from a central F approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", nair_t(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_nair_t.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following a Nair t-distribution:

$$C_X(t) = \int_0^\infty e^{itx} \text{pdf}_X(x) \mathrm{d}x$$

where $U(\cdot)$ denotes the confluent hypergeometric function of the second kind.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", nair_t(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_nair_t.**m_x**(t)

Returns `NaN`, since the moment generating function does not exist.

dist_nair_t.**k_x**(t, *k=0*)

Returns `NaN`, since the cumulant generating function does not exist.

dist_nair_t.**moments**(k)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following a Nair t-distribution. The rth moments only exists for $n_2 > 2r$.

$$\mu'_X(r) = E(X^r) = \int_0^\infty x^r \text{pdf}_X(x)\text{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", nair_t(mu, sigma).moments(k))
6.35635234625645256156156145614561356E+00
```

dist_nair_t.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following a Nair t-distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", nair_t(mu, sigma).cumulants(k))
6.35635234625645256156156145614561356E+00
```

4.10.12 Halperin's t-distribution

class ctx.**dist_halperin_t**(*rho*, *k*, *nu*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The Halperin t-distribution with common correlation ρ, $k \geq 2$ groups (including control group) and error degrees of freedom ν is a continuous distribution with the support interval $(0, +\infty)$. See also Dunnett [290], Bechhofer and Dunnett [26].

Let $X_1, \ldots, X_k$ be a random sample of size k from a $\mathcal{N}(0, \sigma^2)$ distribution. Let s^2 be an independent mean square estimate of σ with n degrees of freedom. Then

$$Q = \frac{\max|X_1 - X_j|}{s}, \quad 1 < j < k$$

has a Halperin $|t|$-distribution with k and n degrees of freedom.

For Dunnett's test:

$$\lambda_i = \frac{1}{\sqrt{1 + n_0/n_i}}$$

dist_halperin_t.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a Halperin t-distribution:

$$\mathrm{pdf}_X(x) = \int_0^\infty f_{\mathrm{nmm_corr}}(sx, \rho, k) \cdot s\sqrt{\nu} \cdot f_\chi\left(s\sqrt{\nu}, \nu\right)\, \mathrm{d}s$$

where $f_{\mathrm{nmm_corr}}(\cdot, \rho, k)$ is the pdf of the normal maximum modulus (equicorrelated case) with common correlation ρ and k groups, and $f_\chi(\cdot, \nu)$ is the pdf of the χ-distribution with ν degrees of freedom.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", halperin_t(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_halperin_t.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a Halperin t-distribution:

$$\mathrm{cdf}_X(x) = \int_0^\infty F_{\mathrm{nmm_corr}}(sx, \rho, k)\sqrt{\nu} \cdot f_\chi\left(s\sqrt{\nu}, \nu\right)\, \mathrm{d}s$$

where $F_{\mathrm{nmm_corr}}(\cdot, \rho, k)$ is the cdf of the normal maximum modulus (equicorrelated case) with common correlation ρ and k groups, and $f_\chi(\cdot, \nu)$ is the pdf of the χ-distribution with ν degrees of freedom.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", halperin_t(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_halperin_t.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function function (sf) of a random variable X, following a Halperin t-distribution:

$$\mathrm{sf}_X(x) = 1 - \int_0^\infty F_{\mathrm{nmm_corr}}(sx, \rho, k)\sqrt{\nu} \cdot f_\chi\left(s\sqrt{\nu}, \nu\right)\, \mathrm{d}s$$

where $F_{\mathrm{nmm_corr}}(\cdot, \rho, k)$ is the cdf of the normal maximum modulus (equicorrelated case) with common correlation ρ and k groups, and $f_\chi(\cdot, \nu)$ is the pdf of the χ-distribution with ν degrees of freedom.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", halperin_t(mu, sigma).pdf(x))
sf: 6.3563523462564525615615615614561356E-20
```

dist_halperin_t.**qtf**(*q*)

Returns $\text{qtf}_X(x)$, the quantile function function (qtf) of a random variable X, following a Halperin t-distribution:

There is no known explicit form for the quantile function $\text{qtf}_X(x)$: It is computed using Newton iterations with starting values from a central F approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", halperin_t(mu, sigma).qtf(q))
qtf: 6.3563523462564525615615615614561356E+00
```

dist_halperin_t.**isf**(*q*)

Returns $\text{isf}_X(q)$, the inverse survival function function (isf) of a random variable X, following a Halperin t-distribution:

There is no known explicit form for the quantile function $\text{isf}_X(x)$: It is computed using Newton iterations with starting values from a central F approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", halperin_t(mu, sigma).isf(q))
6.3563523462564525615615615614561356E+00
```

dist_halperin_t.**c_x**(*t*)

Returns $C_X(t)$, the characteristic function of a random variable X, following a Halperin t-distribution:

$$C_X(t) = \int_0^\infty e^{itx} \text{pdf}_X(x) \mathrm{d}x$$

where $U(\cdot)$ denotes the confluent hypergeometric function of the second kind.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", halperin_t(mu, sigma).c_x(t))
6.3563523462564525615615615614561356E+00
```

dist_halperin_t.**m_x**(*t*)

Returns `NaN`, since the moment generating function does not exist.

dist_halperin_t.**k_x**(*t*, *k=0*)

Returns `NaN`, since the cumulant generating function does not exist.

dist_halperin_t.**moments**(k)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following a Halperin t-distribution. The rth moments only exists for $n_2 > 2r$.

$$\mu'_X(r) = E(X^r) = \int_0^\infty x^r \mathrm{pdf}_X(x)\mathrm{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", halperin_t(mu, sigma).moments(k))
6.356352346256452561561561561456l356E+00
```

dist_halperin_t.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following a Halperin t-distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", halperin_t(mu, sigma).cumulants(k))
6.356352346256452561561561561456l356E+00
```

4.10.13 Nelson's h-distribution

class ctx.**dist_nelson_h**(*rho*, *k*, *nu*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The Halperin t-distribution with common correlation ρ, $k \geq 2$ groups (including control group) and error degrees of freedom ν is a continuous distribution with the support interval $(0, +\infty)$. See also Dunnett [290], Bechhofer and Dunnett [26].

Let $X_1, \ldots, X_k$ be a random sample of size k from a $\mathcal{N}(0, \sigma^2)$ distribution. Let s^2 be an independent mean square estimate of σ with n degrees of freedom. Then

$$Q = \frac{\max|X_1 - X_j|}{s}, \quad 1 < j < k$$

has a Halperin $|t|$-distribution with k and n degrees of freedom.

For Dunnett's test:

$$\lambda_i = \frac{1}{\sqrt{1 + n_0/n_i}}$$

dist_nelson_h.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a Halperin t-distribution:

$$\text{pdf}_X(x) = \int_0^\infty f_{\text{nmm_corr}}(sx, \rho, k) \cdot s\sqrt{\nu} \cdot f_\chi\left(s\sqrt{\nu}, \nu\right)\, \mathrm{d}s$$

where $f_{\text{nmm_corr}}(\cdot, \rho, k)$ is the pdf of the normal maximum modulus (equicorrelated case) with common correlation ρ and k groups, and $f_\chi(\cdot, \nu)$ is the pdf of the χ-distribution with ν degrees of freedom.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", nelson_h(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_nelson_h.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a Halperin t-distribution:

$$\text{cdf}_X(x) = \int_0^\infty F_{\text{nmm_corr}}(sx, \rho, k)\sqrt{\nu} \cdot f_\chi\left(s\sqrt{\nu}, \nu\right)\, \mathrm{d}s$$

where $F_{\text{nmm_corr}}(\cdot, \rho, k)$ is the cdf of the normal maximum modulus (equicorrelated case) with common correlation ρ and k groups, and $f_\chi(\cdot, \nu)$ is the pdf of the χ-distribution with ν degrees of freedom.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", nelson_h(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_nelson_h.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function function (sf) of a random variable X, following a Halperin t-distribution:

$$\text{sf}_X(x) = 1 - \int_0^\infty F_{\text{nmm_corr}}(sx, \rho, k)\sqrt{\nu} \cdot f_\chi\left(s\sqrt{\nu}, \nu\right)\, \mathrm{d}s$$

where $F_{\text{nmm_corr}}(\cdot, \rho, k)$ is the cdf of the normal maximum modulus (equicorrelated case) with common correlation ρ and k groups, and $f_\chi(\cdot, \nu)$ is the pdf of the χ-distribution with ν degrees of freedom.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", nelson_h(mu, sigma).pdf(x))
sf: 6.35635234625645256156156145613 56E-20
```

dist_nelson_h.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function function (qtf) of a random variable X, following a Halperin t-distribution:

There is no known explicit form for the quantile function $\text{qtf}_X(x)$: It is computed using Newton iterations with starting values from a central F approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", nelson_h(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_nelson_h.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function function (isf) of a random variable X, following a Halperin t-distribution:

There is no known explicit form for the quantile function $\text{isf}_X(x)$: It is computed using Newton iterations with starting values from a central F approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", nelson_h(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_nelson_h.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following a Halperin t-distribution:

$$C_X(t) = \int_0^\infty e^{itx} \text{pdf}_X(x) \mathrm{d}x$$

where $U(\cdot)$ denotes the confluent hypergeometric function of the second kind.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", nelson_h(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_nelson_h.**m_x**(t)

Returns `NaN`, since the moment generating function does not exist.

dist_nelson_h.**k_x**(t, *k=0*)

Returns `NaN`, since the cumulant generating function does not exist.

dist_nelson_h.**moments**(k)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following a Halperin t-distribution. The rth moments only exists for $n_2 > 2r$.

$$\mu'_X(r) = E(X^r) = \int_0^\infty x^r \text{pdf}_X(x) \text{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", nelson_h(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_nelson_h.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following a Halperin t-distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", nelson_h(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

4.10.14 Studentized range distribution

class ctx.**dist_studentized_range**(k, *nu*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The studentized range distribution with $k \geq 2$ groups and error degrees of freedom ν is a continuous distribution with the support interval $(0, +\infty)$. See also Wikipedia [1213], Harter [362], R (Statistical System) [533],

Let $X_1, \ldots, X_k$ be a random sample of size k from a $\mathcal{N}(0, \sigma^2)$ distribution. Let s^2 be an independent mean square estimate of σ with n degrees of freedom. Then

$$Q = \frac{\max|X_i - X_j|}{s}, \quad 1 < i < j < k$$

has a Studentized Range distribution with k and n degrees of freedom.

Let $X_1, \ldots, X_k$ be a random sample of size k from a $\mathcal{N}(0, \sigma^2)$ distribution. Let s^2 be an independent mean square estimate of σ with n degrees of freedom.

Then $Q_n = \max|X_i - X_j|, 1 < i < j < k$, has a Normal Range distribution with k degrees of freedom, and $Q_t = Q_n/s$ has a Studentized Range distribution with k and n degrees of freedom.

dist_studentized_range.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following a central studentized range distribution:

$$\text{pdf}_X(x) = \int_0^\infty f_{\text{nrange}}(sx, k) \cdot s\sqrt{\nu} \cdot f_\chi\left(s\sqrt{\nu}, \nu\right)\, \mathrm{d}s$$

where $f_{\text{nrange}}(\cdot, k)$ is the pdf of the normal range with k groups, and $f_\chi(\cdot, \nu)$ is the pdf of the χ-distribution with ν degrees of freedom.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", mp_studentized_range(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_studentized_range.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a central studentized range distribution:

$$\text{cdf}_X(x) = \int_0^\infty F_{\text{nrange}}(sx, k) \cdot \sqrt{\nu} \cdot f_\chi\left(s\sqrt{\nu}, \nu\right)\, \mathrm{d}s$$

where $F_{\text{nrange}}(\cdot, k)$ is the cdf of the normal range with k groups, and $f_\chi(\cdot, \nu)$ is the pdf of the χ-distribution with ν degrees of freedom.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", mp_studentized_range(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_studentized_range.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function function (sf) of a random variable X, following a central studentized range distribution:

$$\text{sf}_X(x) = 1 - \int_0^\infty F_{\text{nrange}}(sx, k) \cdot \sqrt{\nu} \cdot f_\chi\left(s\sqrt{\nu}, \nu\right)\, \mathrm{d}s$$

where $F_{\text{nrange}}(\cdot, k)$ is the cdf of the normal range with k groups, and $f_\chi(\cdot, \nu)$ is the pdf of the χ-distribution with ν degrees of freedom.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", mp_studentized_range(mu, sigma).pdf(x))
sf: 6.35635234625645256156156145613 56E-20
```

dist_studentized_range.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function function (qtf) of a random variable X, following a central studentized range distribution:

There is no known explicit form for the quantile function $\text{qtf}_X(x)$: It is computed using Newton iterations with starting values from a central F approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", mp_studentized_range(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_studentized_range.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function function (isf) of a random variable X, following a central studentized range distribution:

There is no known explicit form for the quantile function $\text{isf}_X(x)$: It is computed using Newton iterations with starting values from a central F approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", mp_studentized_range(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_studentized_range.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following a central studentized range distribution:

$$C_X(t) = \int_0^\infty e^{itx} \text{pdf}_X(x) \mathrm{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", mp_studentized_range(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_studentized_range.**m_x**(t)

Returns NaN, since the moment generating function does not exist.

dist_studentized_range.**k_x**(t, *k=0*)

Returns NaN, since the cumulant generating function does not exist.

dist_studentized_range.**moments**(k)

Returns the first j raw moments, $\mu_j, j = 1 \dots k$, of a random variable X, following a central studentized range distribution. The rth moments only exists for $n_2 > 2r$.

$$\mu'_X(r) = E(X^r) = \int_0^\infty x^r \mathrm{pdf}_X(x)\mathrm{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", mp_studentized_range(mu, sigma).moments(k))
6.35635234625645256156156145561356E+00
```

dist_studentized_range.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \dots k$, of a random variable X, following a central studentized range distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", mp_studentized_range(mu, sigma).cumulants(k))
6.35635234625645256156156145561356E+00
```

4.11 Distributions related to multivariate statistical analysis

4.11.1 Distribution of the sum of the negative logarithms of independent beta variables

class ctx.**dist_logrv_beta_sum**(p, bi, ci)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

A random variable X follows the distribution of the negative logarithm of the product of p beta variables with parameters a_i and b_i if it is defined as $X = -\log(Y)$, where Y follows a beta product distribution with parameters a_i and b_i. The support interval of X is $(0, +\infty)$.

See also Anderson [9], Muirhead [416], Butler [165], Ginzberg [347], pages 92-105, Marques *et al.* [409], Tang and Gupta [511].

dist_logrv_beta_sum.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables:

The pdf can be calculated (in principle in arbitrary precision) by numerical inversion of the characteristic function, using the algorithm by Gil-Pelaez. The PDF of Y is the inverse Fourier transform of its characteristic function,

$$\text{pdf}_X(x) = \frac{1}{\pi}\int_0^\infty \Re\left(e^{-itx}C_X(t)\right)\mathrm{d}t.$$

where $\Re(z)$ denotes the real part of z.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", fisher_f(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_logrv_beta_sum.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables:

The cdf can be calculated (in principle in arbitrary precision) by numerical inversion of the characteristic function, using the algorithm by Gil-Pelaez. Gil-Pelaez derived the following inversion formula which requires integration of a real-valued function, only. In particular,

$$\text{cdf}_X(x) = \frac{1}{2} - \frac{1}{\pi}\int_0^\infty \Im\left(\frac{e^{-itx}C_X(t)}{t}\right)\mathrm{d}t.$$

where $\Im(z)$ denotes the imaginary part of z.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", fisher_f(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_logrv_beta_sum.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function (sf) of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables:

The sf can be calculated (in principle in arbitrary precision) by numerical inversion of the characteristic function, using the algorithm by Gil-Pelaez. Gil-Pelaez derived the following inversion formula which requires integration of a real-valued function, only. In particular,

$$\mathrm{sf}_X(x) = \frac{1}{2} + \frac{1}{\pi}\int_0^\infty \Im\left(\frac{e^{-itx}C_X(t)}{t}\right)\mathrm{d}t.$$

where $\Im(z)$ denotes the imaginary part of z.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", fisher_f(mu, sigma).pdf(x))
sf: 6.3563523462564525615615615614561356E-20
```

`dist_logrv_beta_sum.qtf(`q`)`

Returns $\mathrm{qtf}_X(q)$, the quantile function (qtf) of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables:

There is no known closed exact form for $\mathrm{qtf}_X(q)$ or $\mathrm{isf}_X(q)$. It is computed with Newton iterations where the starting values are from Nagarsenker's approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", fisher_f(mu, sigma).qtf(q))
qtf: 6.3563523462564525615615615614561356E+00
```

`dist_logrv_beta_sum.isf(`q`)`

Returns $\mathrm{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables:

There is no known closed exact form for $\mathrm{isf}_X(q)$ or $\mathrm{isf}_X(q)$. It is computed with Newton iterations where the starting values are from Nagarsenker's approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.3563523462564525615615615614561356E+00
```

`dist_logrv_beta_sum.c_x(`t`)`

Returns $C_X(t)$, the characteristic function of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables:

$$C_X(t) = \prod_{j=1}^{p} \frac{\Gamma\left((a_j - it)\right)\Gamma\left((a_j + b_j)\right)}{\Gamma\left(a_j\right)\Gamma\left(a_j + b_j - it\right)}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.3563523462564525615615615614561356E+00
```

dist_logrv_beta_sum.**m_x**(*t*)

Returns the moment generating function of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables.

$$M_X(t) = \prod_{j=1}^{p} \frac{\Gamma\left((a_j - t)\right)\Gamma\left((a_j + b_j)\right)}{\Gamma\left(a_j\right)\Gamma\left(a_j + b_j - t\right)}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_logrv_beta_sum.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function, and its r^{th} derivatives, $K_X^{(r)}(t), r = 1 \ldots k$, of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables.

$$K_X(t) = \sum_{j=1}^{p} \log\left(\Gamma(a_j - t)\right) - \log\left(\Gamma(a_j + b_j - t)\right) + \log\left(\Gamma(a_j + b_j)\right) - \log\left(\Gamma(a_j)\right).$$

$$K_X^{(r)}(t) = (-1)^r \sum_{j=1}^{p} \left(\psi^{(r-1)}(a_j - t) - \psi^{(r-1)}(a_j + b_j - t)\right)$$

where $\psi^{(r)}(\cdot)$ is the polygamma function of order r.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_logrv_beta_sum.**moments**(*k*)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables. The moments are calculated from the cumulants.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_logrv_beta_sum.**cumulants**(*k*)

Returns the first j cumulants, $\kappa_r, r = 1 \ldots k$, of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables.

$$\kappa_r = (-1)^r \sum_{j=1}^{p} \left(\psi^{(r-1)}(a_j) - \psi^{(r-1)}(a_j + b_j)\right)$$

where $\psi^{(r)}(\cdot)$ is the polygamma function of order r.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.356352346256452561561561561456l356E+00
```

Approximations

`ctx.`**`beta_product_ecf`**(*x*, *ai*, *bi*, *results='cdf'*)

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Calculates the Edgeworth approximation to the pdf, cdf and sf.

`ctx.`**`beta_product_ecf_inv`**(*q*, *ai*, *bi*, *results='qtf'*)

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Calculates the Cornish-Fisher approximation to the qtf and isf.

4.11.2 Distribution of the product of independent beta variables

class ctx.**dist_beta_product**(*p*, *bi*, *ci*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The betaproduct distribution is a continuous probability distribution, defined as the product of $p \geq 1$ independent beta variables, which have a beta distribution with b_j and $c_j - b_j$ degrees of freedom, and the support interval $(0, 1)$. See also Anderson [9], Muirhead [416], Butler [165], Ginzberg [347], pages 92-105, Marques *et al.* [409], Tang and Gupta [511].

Text explaining the concepts.

See also Olkin and Press [430], Wilks [1446], Geisser [343], Marques *et al.* [409], Mauchly [410], Coelho *et al.* [180].

dist_beta_product.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following the distribution of the product of independent beta variables. The pdf can expressed as a Meijer G function as follows (PhamGia_2008, p. 1702, Ginzberg_2013, p. 97 + 98):

$$\text{pdf}_X(x) = \frac{Ke^{-x/2}}{2\alpha} G^{m,0}_{m,m}\left(\begin{matrix} a_1, \ldots, a_n; a_{n+1} \ldots a_p \\ b_1, \ldots, b_m; b_{m+1} \ldots b_q \end{matrix} \middle| \; e^{\frac{-x}{2\alpha}}\right)$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", beta_product(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_beta_product.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following the distribution of the product of independent beta variables. The cdf can expressed as a Meijer G function as follows (PhamGia_2008, p. 1702, Ginzberg_2013, p. 97 + 98):

$$\text{cdf}_X(x) == Ke^{-x/2} G^{m+1,0}_{m+1,m+1}\left(\begin{matrix} a_1, \ldots, a_n; a_{n+1} \ldots a_p \\ b_1, \ldots, b_m; b_{m+1} \ldots b_q \end{matrix} \middle| \; e^{\frac{-x}{2\alpha}}\right)$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", beta_product(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_beta_product.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function (sf) of a random variable X, following the distribution of the product of independent beta variables. The cdf can expressed as a Meijer G function as follows (PhamGia_2008, p. 1702, Ginzberg_2013, p. 97 + 98):

$$\text{sf}_X(x) == 1 - Ke^{-x/2} G^{m+1,0}_{m+1,m+1}\left(\begin{matrix} a_1, \ldots, a_n; a_{n+1} \ldots a_p \\ b_1, \ldots, b_m; b_{m+1} \ldots b_q \end{matrix} \middle| \; e^{\frac{-x}{2\alpha}}\right)$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", beta_product(mu, sigma).pdf(x))
sf: 6.3563523462564525615615615614561356E-20
```

dist_beta_product.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following the distribution of the product of independent beta variables:

There is no known closed form for the quantile function $\text{cdf}_X^{-1}(q)$: It is computed with Newton iterations where the starting values are from Nagarsenker's approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", beta_product(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_beta_product.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following the distribution of the product of independent beta variables:

There is no known closed form for the quantile function $\text{isf}_X^{-1}(q)$: It is computed with Newton iterations where the starting values are from Nagarsenker's approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", beta_product(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_beta_product.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following the distribution of the product of independent beta variables:

$$C_X(t) = \int_0^\infty e^{itx} \text{pdf}_X(x) \mathrm{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", beta_product(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_beta_product.**m_x**(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following the distribution of the product of independent beta variables:

$$M_X(t) = \int_0^\infty e^{tx} \text{pdf}_X(x) \mathrm{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", beta_product(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_beta_product.**k_x**(*s*, *k=0*)

Returns $K_X(s)$, the cumulant generating function, and its j^{th} derivatives, $K_X^{(j)}(s), j = 1 \ldots k$, of a random variable X, following the distribution of the product of independent beta variables:

$$K_X(s) = \log\left(M_X(t)\right)$$

where $\Gamma_p(\cdot)$ is the multivariate gamma function and $\psi(\cdot)$ is the digamma function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", beta_product(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

dist_beta_product.**moments**(*k*)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following the distribution of the product of independent beta variables:

$$\mu'_X(r) = \prod_{j=1}^{p} \frac{\Gamma(c_j)\Gamma(b_j + h)}{\Gamma(b_j)\Gamma(c_j + h)}, .$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", beta_product(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_beta_product.**cumulants**(*k*)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following the distribution of the product of independent beta variables. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", beta_product(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

Additional information

ctx.**log_beta_prod_gp**(*k*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Calculates the pdf, cdf and sf from the characteristic function using the procedure of Gil-Pelaez (see *gil_pelaez_pdf()* and *gil_pelaez_cdf()*).

This uses $U = \log 2W$.

For a large subset of the random variables W defined in in the previous section there exists a power transformation $U = W^{2/N}$, such that

$$\mathrm{E}[U^h] = \prod_{j=1}^{p} \frac{\Gamma(c_j)\Gamma(b_j + h)}{\Gamma(b_j)\Gamma(c_j + h)},$$

i.e. U is distributed as the product of p independent random variables which have a beta distribution with b_j and $c_j - b_j$ degrees of freedom. This allows to specify these distributions in a simpler form, just giving the b_j and c_j. Its density defined on $(0, 1)$

These are functions for which the l.r.t. $M/2$ is distributed as the product of p independent random variables which have a beta distribution with b_j and $c_j - b_j$ degrees of freedom.

The characteristic function has the general form:

$$\phi_{M/2}(t) = \prod_{j=1}^{p} \frac{\Gamma(c_j)\Gamma(b_j - it)}{\Gamma(b_j)\Gamma(c_j - it)}$$

The distribution of the product of independent beta random variables can also be expressed as a Box-Davis distribution of the Box type with the following parameter choices for a, b, x_k, ξ_k, y_j and η_j:

$$a = b = p, \quad x_k = y_j = N/2, \quad \xi_k = b_k - N/2, \quad \eta_j = c_j - N/2, \quad j, k = 1 \ldots p,$$

`ctx.beta_prod_spa(`*x*, *n*, *results='c'*`)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Calculates the Luggannini-Rice saddlepoint approximation of the pdf, cdf and sf.

This uses $2 \log W$.

Returns $K_X(s)$, the cumulant generating function, and its j^{th} derivatives, $K_X^{(j)}(s), j = 1 \ldots k$, of a random variable X, following the distribution of`2log W` of central Wilks W:

$$K_X(s) = \log \left[\frac{\Gamma_p(n/2 + s)\Gamma_p((n+m)/2)}{\Gamma_p(n/2)\Gamma_p((n+m)/2 + s)} \right].$$

$$K'(s) = \sum_{i=1}^{p} \left[\psi\left(\tfrac{1}{2}n + s - \tfrac{1}{2}(i-1)\right) - \psi\left(\tfrac{1}{2}(n+m) + s - \tfrac{1}{2}(i-1)\right) \right]$$

where $\Gamma_p(\cdot)$ is the multivariate gamma function and $\psi(\cdot)$ is the digamma function.

`ctx.beta_prod_spa_inv(`*x*, *n*, *results='qtf'*`)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Calculates the inverse Jensen saddlepoint approximation of the qtf and isf.

This uses $2 \log W$.

`ctx.beta_product_bd(`*x*, *f*, *rho*, *omega*`)`

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Calculates the Box-Davis approximation to the pdf, cdf and sf.

$$f = -2 \sum_{j=1}^{p} (b_j - c_j); \quad \theta = \frac{N}{2};$$

$$\rho = 1 - \frac{1}{f \cdot \theta} \sum_{j=1}^{p} \big(B_2(b_j - \theta) - B_2(c_j - \theta) \big)$$

$$\omega_r = \frac{(-1)^{r+1}}{r(r+1)(\rho\theta)^r} \sum_{j=1}^{p} \big(B_{r+1}(b_j - \rho\theta) - B_{r+1}(c_j - \rho\theta) \big)$$

`ctx.beta_product_bd_inv(`*q*, *f*, *rho*, *omega*`)`

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Calculates the Box-Davis approximation to the qtf and isf.

ctx.**beta_product_bd_cdf_old**(*x*, *f*, *rho*, *omega*)

where ctx is ipm, dec, mpm, or gmp.

Calculates the Box-Davis approximation to the pdf, cdf and sf.

For the product-of-independent-beta-variates distributions, the parameters of the Box-Davis expansion are given in equations ....

The distribution of the product of independent beta random variables can also be expressed as a Box-Davis distribution of the Box type with the following parameter choices for a, b, x_k, ξ_k, y_j and η_j:

$$a = b = p, \quad x_k = y_j = N/2, \quad \xi_k = b_k - N/2, \quad \eta_j = c_j - N/2, \quad j, k = 1 \ldots p,$$

$$\theta = \min_{i,j}(x_i, y_j),$$

$$f = -2\left[\sum_{k=1}^{a} \xi_k - \sum_{j=1}^{b} \eta_j - \tfrac{1}{2}(a-b)\right],$$

$$\rho = 1 - \frac{1}{f}\left[\sum_{k=1}^{a} x_k^{-1}\left(\xi_k^2 - \xi_k + \tfrac{1}{6}\right) - \sum_{j=1}^{b} y_j^{-1}\left(\eta_j^2 - \eta_j + \tfrac{1}{6}\right)\right],$$

$$\omega_r = \frac{(-1)^{r+1}}{r(r+1)}\left[\sum_{k=1}^{a} \frac{B_{r+1}((1-\rho)x_k + \xi_k)}{(\rho x_k)^r} - \sum_{j=1}^{b} \frac{B_{r+1}((1-\rho)y_j + \eta_j)}{(\rho y_j)^r}\right],$$

$$\begin{aligned} \log(K_B) &= \log(K) + \frac{1}{2}(m-k)\log(2\pi) - \frac{f}{2}\log(\rho) \\ &\quad + \sum_{i=1}^{m}\left(x_i + \xi_i - \frac{1}{2}\right)\log(x_i) - \sum_{i=1}^{k}\left(y_i + \eta_i - \frac{1}{2}\right)\log(x_i) \end{aligned} \tag{4.38}$$

4.11.3 Distribution of Wilks' Λ

class ctx.**dist_wilks_lambda**(p, m, n)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The Wilks' Λ distribution is a continuous probability distribution with $p \geq 1$ predictor variables, error degress of freedom $m \geq 1$ and $n \geq 1$, and the support interval $(0, 1)$. See also: Wilks [1444], Anderson [9], Muirhead [416], Butler [165], Pham-Gia [467], Witkovský [1489], Witkovský [1488].

dist_wilks_lambda.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following the distribution of Wilks' Lambda: The pdf is computed by numerical inversion of the characteristic function or cumulant generating function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", wilks_lambda(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_wilks_lambda.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following the distribution of Wilks' Lambda: The cdf is computed by numerical inversion of the characteristic function or cumulant generating function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", wilks_lambda(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_wilks_lambda.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function (sf) of a random variable X, following the distribution of Wilks' Lambda:

$$\text{sf}_X(x) = 1 - \text{cdf}_X(x) = \int_x^{\infty} \text{pdf}_X(x)\mathrm{d}t.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", wilks_lambda(mu, sigma).pdf(x))
sf: 6.3563523462564525615615615614561356E-20
```

dist_wilks_lambda.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following the distribution of Wilks' Lambda:

There is no known closed form for the quantile function $\text{cdf}_X^{-1}(q)$: It is computed with Newton iterations where the starting values are from a central chi-square approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", wilks_lambda(mu, sigma).qtf(q))
qtf: 6.3563523462564525615615615614561356E+00
```

dist_wilks_lambda.**isf**(*q*)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following the distribution of Wilks' Lambda:

$$\text{isf}_X(q) = \text{qtf}_X(1-q) = \text{cdf}_X^{-1}(1-q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", wilks_lambda(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_wilks_lambda.**c_x**(*t*)

Returns $C_X(t)$, the characteristic function of a random variable X, following the distribution of Wilks' Lambda:

$$C_X(t) = \frac{\Gamma_p(n/2 - it)\Gamma_p((n+m)/2)}{\Gamma_p(n/2)\Gamma_p((n+m)/2 - it)}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", wilks_lambda(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_wilks_lambda.**m_x**(*t*)

Returns $M_X(t)$, the moment generating function of a random variable X, following the distribution of Wilks' Lambda:

$$M_X(t) = \frac{\Gamma_p(n/2 + s)\Gamma_p((n+m)/2)}{\Gamma_p(n/2)\Gamma_p((n+m)/2 + s)}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", wilks_lambda(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_wilks_lambda.**k_x**(*s*, *k=0*)

Returns $K_X(s)$, the cumulant generating function, and its j^{th} derivatives, $K_X^{(j)}(s), j = 1 \ldots k$, of a random variable X, following the distribution of`2log W` of central Wilks W:

$$K_X(s) = \log\left[\frac{\Gamma_p(n/2 + s)\Gamma_p((n+m)/2)}{\Gamma_p(n/2)\Gamma_p((n+m)/2 + s)}\right].$$

$$K'(s) = \sum_{i=1}^{p}\left[\psi\left(\tfrac{1}{2}n + s - \tfrac{1}{2}(i-1)\right) - \psi\left(\tfrac{1}{2}(n+m) + s - \tfrac{1}{2}(i-1)\right)\right]$$

where $\Gamma_p(\cdot)$ is the multivariate gamma function and $\psi(\cdot)$ is the digamma function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", wilks_lambda(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

dist_wilks_lambda.**moments**(*k*)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following the distribution of Wilks' Lambda:

$$\mu'_X(r) = \frac{\Gamma_p(n/2+s)\Gamma_p((n+m)/2)}{\Gamma_p(n/2)\Gamma_p((n+m)/2+s)}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", wilks_lambda(mu, sigma).moments(k))
6.3563523462564525615615615614561356E+00
```

dist_wilks_lambda.**cumulants**(*k*)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following the distribution of Wilks' Lambda The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", wilks_lambda(mu, sigma).cumulants(k))
6.3563523462564525615615615614561356E+00
```

Additional information

Anderson, 2003, p. 651-656

p: # of variables

m = q1 = # of groups

M: n-p+1; N=n+q; n = N-q = degrees of freedom (error)

Tables: Renscher 2002, p.566 - 573

Approximations

ctx.**wilks_lambda_gp**(*x*, *p*, *m*, *k*, *results='cdf'*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

Calculates the pdf, cdf and sf from the characteristic function using the procedure of Gil-Pelaez (see *gil_pelaez_pdf()* and *gil_pelaez_cdf()*).

This uses $U = \log 2W$.

ctx.**wilks_lambda_ecf**(*x*, *p*, *m*, *n*, *results='cdf'*)

where ctx is ipm, dec, mpm, or gmp.

Calculates the Edgeworth approximation to the pdf, cdf and sf.

ctx.**wilks_lambda_ecf_inv**(*q*, *p*, *m*, *n*, *results='qtf'*)

where ctx is ipm, dec, mpm, or gmp.

Calculates the Cornish-Fisher approximation to the qtf and isf.

ctx.**wilks_lambda_spa**(*(x*, *p*, *n1*, *n2*, *results='c'*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

Calculates the Luggannini-Rice saddlepoint approximation of the pdf, cdf and sf.

This uses $2 \log W$.

ctx.**wilks_lambda_spa_inv**(*x*, *n*, *results='qtf'*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

Calculates the inverse Jensen saddlepoint approximation of the qtf and isf.

This uses $2 \log W$.

ctx.**wilks_lambda_bd**(*x*, *f*, *rho*, *omega*)

where ctx is ipm, dec, mpm, or gmp.

Calculates the Box-Davis approximation to the pdf.

For the Wilks' Lambda distribution, the parameters of the Box-Davis expansion are given vy

$$f = pq; \quad \rho = 1 - \frac{p+q+1}{2(N-1)},$$

$$\omega_r = \frac{(-2)^r}{r(r+1)\mu^r} \sum_{j=0}^{q-1} B_{r+1}((\beta - j)/2) - B_{r+1}((\beta - p - j)/2), \quad \text{where}$$

$$\beta = \frac{p+q+1}{2}; \quad \mu = N - \frac{p+q+3}{2}.$$

wilks_lambda_bd_inv(*q*, *f*, *rho*, *omega*)

where ctx is ipm, dec, mpm, or gmp.

Calculates the Box-Davis approximation to the qtf and isf.

4.11.4 Distribution of Wilks' L_{vc}

class ctx.**dist_wilks_cs**(*p*, *bi*, *ci*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

A random variable X follows the distribution of the negative logarithm of the product of p beta variables with parameters a_i and b_i if it is defined as $X = -\log(Y)$, where Y follows a beta product distribution with parameters a_i and b_i. The support interval of X is $(0, +\infty)$.

See also Wilks [1446], Anderson [9], Muirhead [416], Butler [165], Ginzberg [347], pages 92-105, Marques *et al.* [409], Tang and Gupta [511].

dist_wilks_cs.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables:

The pdf can be calculated (in principle in arbitrary precision) by numerical inversion of the characteristic function, using the algorithm by Gil-Pelaez. The PDF of Y is the inverse Fourier transform of its characteristic function,

$$\text{pdf}_X(x) = \frac{1}{\pi}\int_0^\infty \Re\left(e^{-itx}C_X(t)\right)\,\mathrm{d}t.$$

where $\Re(z)$ denotes the real part of z.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", fisher_f(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_wilks_cs.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables:

The cdf can be calculated (in principle in arbitrary precision) by numerical inversion of the characteristic function, using the algorithm by Gil-Pelaez. Gil-Pelaez derived the following inversion formula which requires integration of a real-valued function, only. In particular,

$$\text{cdf}_X(x) = \frac{1}{2} - \frac{1}{\pi}\int_0^\infty \Im\left(\frac{e^{-itx}C_X(t)}{t}\right)\,\mathrm{d}t.$$

where $\Im(z)$ denotes the imaginary part of z.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", fisher_f(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_wilks_cs.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function (sf) of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables:

The sf can be calculated (in principle in arbitrary precision) by numerical inversion of the characteristic function, using the algorithm by Gil-Pelaez. Gil-Pelaez derived the following inversion formula which requires integration of a real-valued function,

only. In particular,

$$\mathrm{sf}_X(x) = \frac{1}{2} + \frac{1}{\pi}\int_0^\infty \Im\left(\frac{e^{-itx}C_X(t)}{t}\right)\mathrm{d}t.$$

where $\Im(z)$ denotes the imaginary part of z.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", fisher_f(mu, sigma).pdf(x))
sf: 6.3563523462564525615615615614561356E-20
```

dist_wilks_cs.**qtf**(q)

Returns $\mathrm{qtf}_X(q)$, the quantile function (qtf) of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables:

There is no known closed exact form for $\mathrm{qtf}_X(q)$ or $\mathrm{isf}_X(q)$. It is computed with Newton iterations where the starting values are from Nagarsenker's approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", fisher_f(mu, sigma).qtf(q))
qtf: 6.3563523462564525615615615614561356E+00
```

dist_wilks_cs.**isf**(q)

Returns $\mathrm{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables:

There is no known closed exact form for $\mathrm{isf}_X(q)$ or $\mathrm{isf}_X(q)$. It is computed with Newton iterations where the starting values are from Nagarsenker's approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.3563523462564525615615615614561356E+00
```

dist_wilks_cs.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables:

$$C_X(t) = \prod_{j=1}^{p} \frac{\Gamma\left((a_j - it)\right)\Gamma\left((a_j + b_j)\right)}{\Gamma\left(a_j\right)\Gamma\left(a_j + b_j - it\right)}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.3563523462564525615615615614561356E+00
```

dist_wilks_cs.**m_x**(*t*)

Returns the moment generating function of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables.

$$M_X(t) = \prod_{j=1}^{p} \frac{\Gamma\left((a_j - t)\right)\Gamma\left((a_j + b_j)\right)}{\Gamma\left(a_j\right)\Gamma\left(a_j + b_j - t\right)}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.356352346256452561561561561456135 6E+00
```

dist_wilks_cs.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function, and its r^{th} derivatives, $K_X^{(r)}(t), r = 1 \ldots k$, of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables.

$$K_X(t) = \sum_{j=1}^{p} \log\left(\Gamma(a_j - t)\right) - \log\left(\Gamma(a_j + b_j - t)\right) + \log\left(\Gamma(a_j + b_j)\right) - \log\left(\Gamma(a_j)\right).$$

$$K_X^{(r)}(t) = (-1)^r \sum_{j=1}^{p} \left(\psi^{(r-1)}(a_j - t) - \psi^{(r-1)}(a_j + b_j - t)\right)$$

where $\psi^{(r)}(\cdot)$ is the polygamma function of order r.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.356352346256452561561561561456135 6E+00
```

dist_wilks_cs.**moments**(*k*)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables. The moments are calculated from the cumulants.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.356352346256452561561561561456135 6E+00
```

dist_wilks_cs.**cumulants**(*k*)

Returns the first j cumulants, $\kappa_r, r = 1 \ldots k$, of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables.

$$\kappa_r = (-1)^r \sum_{j=1}^{p} \left(\psi^{(r-1)}(a_j) - \psi^{(r-1)}(a_j + b_j)\right)$$

where $\psi^{(r)}(\cdot)$ is the polygamma function of order r.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.35635234625645256156156156145613 56E+00
```

4.11.5 Distribution of Wilks' L_{vcm}

class ctx.**dist_wilks_lcm**(p, *bi*, *ci*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

A random variable X follows the distribution of the negative logarithm of the product of p beta variables with parameters a_i and b_i if it is defined as $X = -\log(Y)$, where Y follows a beta product distribution with parameters a_i and b_i. The support interval of X is $(0, +\infty)$.

See also Wilks [1446], Anderson [9], Muirhead [416], Butler [165], Ginzberg [347], pages 92-105, Marques *et al.* [409], Tang and Gupta [511].

dist_wilks_lcm.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables:

The pdf can be calculated (in principle in arbitrary precision) by numerical inversion of the characteristic function, using the algorithm by Gil-Pelaez. The PDF of Y is the inverse Fourier transform of its characteristic function,

$$\text{pdf}_X(x) = \frac{1}{\pi}\int_0^\infty \Re\left(e^{-itx}C_X(t)\right)\,\mathrm{d}t.$$

where $\Re(z)$ denotes the real part of z.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", fisher_f(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_wilks_lcm.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables:

The cdf can be calculated (in principle in arbitrary precision) by numerical inversion of the characteristic function, using the algorithm by Gil-Pelaez. Gil-Pelaez derived the following inversion formula which requires integration of a real-valued function, only. In particular,

$$\text{cdf}_X(x) = \frac{1}{2} - \frac{1}{\pi}\int_0^\infty \Im\left(\frac{e^{-itx}C_X(t)}{t}\right)\,\mathrm{d}t.$$

where $\Im(z)$ denotes the imaginary part of z.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", fisher_f(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_wilks_lcm.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function (sf) of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables:

The sf can be calculated (in principle in arbitrary precision) by numerical inversion of the characteristic function, using the algorithm by Gil-Pelaez. Gil-Pelaez derived the following inversion formula which requires integration of a real-valued function,

only. In particular,

$$\mathrm{sf}_X(x) = \frac{1}{2} + \frac{1}{\pi}\int_0^\infty \Im\left(\frac{e^{-itx}C_X(t)}{t}\right)\mathrm{d}t.$$

where $\Im(z)$ denotes the imaginary part of z.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", fisher_f(mu, sigma).pdf(x))
sf: 6.3563523462564525615615615614561356E-20
```

dist_wilks_lcm.**qtf**(q)

Returns $\mathrm{qtf}_X(q)$, the quantile function (qtf) of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables:

There is no known closed exact form for $\mathrm{qtf}_X(q)$ or $\mathrm{isf}_X(q)$. It is computed with Newton iterations where the starting values are from Nagarsenker's approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", fisher_f(mu, sigma).qtf(q))
qtf: 6.3563523462564525615615615614561356E+00
```

dist_wilks_lcm.**isf**(q)

Returns $\mathrm{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables:

There is no known closed exact form for $\mathrm{isf}_X(q)$ or $\mathrm{isf}_X(q)$. It is computed with Newton iterations where the starting values are from Nagarsenker's approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.3563523462564525615615615614561356E+00
```

dist_wilks_lcm.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables:

$$C_X(t) = \prod_{j=1}^{p} \frac{\Gamma\left((a_j - it)\right)\Gamma\left((a_j + b_j)\right)}{\Gamma\left(a_j\right)\Gamma\left(a_j + b_j - it\right)}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.3563523462564525615615615614561356E+00
```

dist_wilks_lcm.**m_x**(*t*)

Returns the moment generating function of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables.

$$M_X(t) = \prod_{j=1}^{p} \frac{\Gamma\left((a_j - t)\right)\Gamma\left((a_j + b_j)\right)}{\Gamma\left(a_j\right)\Gamma\left(a_j + b_j - t\right)}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_wilks_lcm.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function, and its r^{th} derivatives, $K_X^{(r)}(t), r = 1 \ldots k$, of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables.

$$K_X(t) = \sum_{j=1}^{p} \log\left(\Gamma(a_j - t)\right) - \log\left(\Gamma(a_j + b_j - t)\right) + \log\left(\Gamma(a_j + b_j)\right) - \log\left(\Gamma(a_j)\right).$$

$$K_X^{(r)}(t) = (-1)^r \sum_{j=1}^{p} \left(\psi^{(r-1)}(a_j - t) - \psi^{(r-1)}(a_j + b_j - t)\right)$$

where $\psi^{(r)}(\cdot)$ is the polygamma function of order r.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_wilks_lcm.**moments**(*k*)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables. The moments are calculated from the cumulants.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_wilks_lcm.**cumulants**(*k*)

Returns the first j cumulants, $\kappa_r, r = 1 \ldots k$, of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables.

$$\kappa_r = (-1)^r \sum_{j=1}^{p} \left(\psi^{(r-1)}(a_j) - \psi^{(r-1)}(a_j + b_j)\right)$$

where $\psi^{(r)}(\cdot)$ is the polygamma function of order r.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.35635234625645256156156156145613 56E+00
```

4.11.6 Distribution of Wilks' test of independence of p variates

class ctx.**dist_wilks_ip**(*p*, *bi*, *ci*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

A random variable X follows the distribution of the negative logarithm of the product of p beta variables with parameters a_i and b_i if it is defined as $X = -\log(Y)$, where Y follows a beta product distribution with parameters a_i and b_i. The support interval of X is $(0, +\infty)$.

See also Wilks [1445], Anderson [9], Muirhead [416], Butler [165], Ginzberg [347], pages 92-105, Marques *et al.* [409], Tang and Gupta [511].

dist_wilks_ip.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables:

The pdf can be calculated (in principle in arbitrary precision) by numerical inversion of the characteristic function, using the algorithm by Gil-Pelaez. The PDF of Y is the inverse Fourier transform of its characteristic function,

$$\text{pdf}_X(x) = \frac{1}{\pi}\int_0^\infty \Re\left(e^{-itx}C_X(t)\right)\,\mathrm{d}t.$$

where $\Re(z)$ denotes the real part of z.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", fisher_f(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_wilks_ip.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables:

The cdf can be calculated (in principle in arbitrary precision) by numerical inversion of the characteristic function, using the algorithm by Gil-Pelaez. Gil-Pelaez derived the following inversion formula which requires integration of a real-valued function, only. In particular,

$$\text{cdf}_X(x) = \frac{1}{2} - \frac{1}{\pi}\int_0^\infty \Im\left(\frac{e^{-itx}C_X(t)}{t}\right)\,\mathrm{d}t.$$

where $\Im(z)$ denotes the imaginary part of z.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", fisher_f(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_wilks_ip.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function (sf) of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables:

The sf can be calculated (in principle in arbitrary precision) by numerical inversion of the characteristic function, using the algorithm by Gil-Pelaez. Gil-Pelaez derived the following inversion formula which requires integration of a real-valued function,

only. In particular,

$$\mathrm{sf}_X(x) = \frac{1}{2} + \frac{1}{\pi}\int_0^\infty \Im\left(\frac{e^{-itx}C_X(t)}{t}\right)\mathrm{d}t.$$

where $\Im(z)$ denotes the imaginary part of z.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", fisher_f(mu, sigma).pdf(x))
sf: 6.3563523462564525615615615614561356E-20
```

`dist_wilks_ip.qtf(`q`)`

Returns $\mathrm{qtf}_X(q)$, the quantile function (qtf) of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables:

There is no known closed exact form for $\mathrm{qtf}_X(q)$ or $\mathrm{isf}_X(q)$. It is computed with Newton iterations where the starting values are from Nagarsenker's approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", fisher_f(mu, sigma).qtf(q))
qtf: 6.3563523462564525615615615614561356E+00
```

`dist_wilks_ip.isf(`q`)`

Returns $\mathrm{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables:

There is no known closed exact form for $\mathrm{isf}_X(q)$ or $\mathrm{isf}_X(q)$. It is computed with Newton iterations where the starting values are from Nagarsenker's approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.3563523462564525615615615614561356E+00
```

`dist_wilks_ip.c_x(`t`)`

Returns $C_X(t)$, the characteristic function of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables:

$$C_X(t) = \prod_{j=1}^{p} \frac{\Gamma\left((a_j - it)\right)\Gamma\left((a_j + b_j)\right)}{\Gamma\left(a_j\right)\Gamma\left(a_j + b_j - it\right)}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.3563523462564525615615615614561356E+00
```

dist_wilks_ip.**m_x**(*t*)

Returns the moment generating function of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables.

$$M_X(t) = \prod_{j=1}^{p} \frac{\Gamma\left((a_j - t)\right)\Gamma\left((a_j + b_j)\right)}{\Gamma\left(a_j\right)\Gamma\left(a_j + b_j - t\right)}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_wilks_ip.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function, and its r^{th} derivatives, $K_X^{(r)}(t), r = 1 \ldots k$, of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables.

$$K_X(t) = \sum_{j=1}^{p} \log\left(\Gamma(a_j - t)\right) - \log\left(\Gamma(a_j + b_j - t)\right) + \log\left(\Gamma(a_j + b_j)\right) - \log\left(\Gamma(a_j)\right).$$

$$K_X^{(r)}(t) = (-1)^r \sum_{j=1}^{p} \left(\psi^{(r-1)}(a_j - t) - \psi^{(r-1)}(a_j + b_j - t)\right)$$

where $\psi^{(r)}(\cdot)$ is the polygamma function of order r.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_wilks_ip.**moments**(*k*)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables. The moments are calculated from the cumulants.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_wilks_ip.**cumulants**(*k*)

Returns the first j cumulants, $\kappa_r, r = 1 \ldots k$, of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables.

$$\kappa_r = (-1)^r \sum_{j=1}^{p} \left(\psi^{(r-1)}(a_j) - \psi^{(r-1)}(a_j + b_j)\right)$$

where $\psi^{(r)}(\cdot)$ is the polygamma function of order r.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.356352346256452561561561561456l356E+00
```

4.11.7 Distribution of Wilks' test of independence of k groups of variates

class ctx.**dist_wilks_iblocks**(*p*, *bi*, *ci*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

A random variable X follows the distribution of the negative logarithm of the product of p beta variables with parameters a_i and b_i if it is defined as $X = -\log(Y)$, where Y follows a beta product distribution with parameters a_i and b_i. The support interval of X is $(0, +\infty)$.

See also Wilks [1445], Anderson [9], Muirhead [416], Butler [165], Ginzberg [347], pages 92-105, Marques *et al.* [409], Tang and Gupta [511].

dist_wilks_iblocks.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables:

The pdf can be calculated (in principle in arbitrary precision) by numerical inversion of the characteristic function, using the algorithm by Gil-Pelaez. The PDF of Y is the inverse Fourier transform of its characteristic function,

$$\text{pdf}_X(x) = \frac{1}{\pi}\int_0^\infty \Re\left(e^{-itx}C_X(t)\right)\,\mathrm{d}t.$$

where $\Re(z)$ denotes the real part of z.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", fisher_f(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_wilks_iblocks.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables:

The cdf can be calculated (in principle in arbitrary precision) by numerical inversion of the characteristic function, using the algorithm by Gil-Pelaez. Gil-Pelaez derived the following inversion formula which requires integration of a real-valued function, only. In particular,

$$\text{cdf}_X(x) = \frac{1}{2} - \frac{1}{\pi}\int_0^\infty \Im\left(\frac{e^{-itx}C_X(t)}{t}\right)\,\mathrm{d}t.$$

where $\Im(z)$ denotes the imaginary part of z.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", fisher_f(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_wilks_iblocks.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function (sf) of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables:

The sf can be calculated (in principle in arbitrary precision) by numerical inversion of the characteristic function, using the algorithm by Gil-Pelaez. Gil-Pelaez derived the following inversion formula which requires integration of a real-valued function,

only. In particular,

$$\mathrm{sf}_X(x) = \frac{1}{2} + \frac{1}{\pi}\int_0^\infty \Im\left(\frac{e^{-itx}C_X(t)}{t}\right)\mathrm{d}t.$$

where $\Im(z)$ denotes the imaginary part of z.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", fisher_f(mu, sigma).pdf(x))
sf: 6.3563523462564525615615615614561356E-20
```

dist_wilks_iblocks.**qtf**(q)

Returns $\mathrm{qtf}_X(q)$, the quantile function (qtf) of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables:

There is no known closed exact form for $\mathrm{qtf}_X(q)$ or $\mathrm{isf}_X(q)$. It is computed with Newton iterations where the starting values are from Nagarsenker's approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", fisher_f(mu, sigma).qtf(q))
qtf: 6.3563523462564525615615615614561356E+00
```

dist_wilks_iblocks.**isf**(q)

Returns $\mathrm{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables:

There is no known closed exact form for $\mathrm{isf}_X(q)$ or $\mathrm{isf}_X(q)$. It is computed with Newton iterations where the starting values are from Nagarsenker's approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.3563523462564525615615615614561356E+00
```

dist_wilks_iblocks.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables:

$$C_X(t) = \prod_{j=1}^{p} \frac{\Gamma\left((a_j - it)\right)\Gamma\left((a_j + b_j)\right)}{\Gamma\left(a_j\right)\Gamma\left(a_j + b_j - it\right)}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.3563523462564525615615615614561356E+00
```

dist_wilks_iblocks.**m_x**(*t*)

Returns the moment generating function of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables.

$$M_X(t) = \prod_{j=1}^{p} \frac{\Gamma\left((a_j - t)\right)\Gamma\left((a_j + b_j)\right)}{\Gamma\left(a_j\right)\Gamma\left(a_j + b_j - t\right)}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.356352346256452561561561561456135 6E+00
```

dist_wilks_iblocks.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function, and its r^{th} derivatives, $K_X^{(r)}(t), r = 1 \ldots k$, of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables.

$$K_X(t) = \sum_{j=1}^{p} \log\left(\Gamma(a_j - t)\right) - \log\left(\Gamma(a_j + b_j - t)\right) + \log\left(\Gamma(a_j + b_j)\right) - \log\left(\Gamma(a_j)\right).$$

$$K_X^{(r)}(t) = (-1)^r \sum_{j=1}^{p} \left(\psi^{(r-1)}(a_j - t) - \psi^{(r-1)}(a_j + b_j - t)\right)$$

where $\psi^{(r)}(\cdot)$ is the polygamma function of order r.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.356352346256452561561561561456135 6E+00
```

dist_wilks_iblocks.**moments**(*k*)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables. The moments are calculated from the cumulants.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.356352346256452561561561561456135 6E+00
```

dist_wilks_iblocks.**cumulants**(*k*)

Returns the first j cumulants, $\kappa_r, r = 1 \ldots k$, of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables.

$$\kappa_r = (-1)^r \sum_{j=1}^{p} \left(\psi^{(r-1)}(a_j) - \psi^{(r-1)}(a_j + b_j)\right)$$

where $\psi^{(r)}(\cdot)$ is the polygamma function of order r.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.3563523462564525615615615614561356E+00
```

Approximations

`ctx.`**`wilks_iblocks_bd`**`(`x, f, *rho*, *omega*`)`

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Given N observationsfrom a p variate normal population, suppose that the variates are partitioned into k groupes of sizes $p_i (i = 1, \ldots, k; \sum p_i = p)$, and it required to test the indepence of the groups

$$\omega = \frac{(-1)^{r+1}}{r(r+1)(r+2)\mu^r} \sum_{s=0}^{r+1} \binom{s+1}{r+2} 2^s \delta_s(pl) \left[\beta^{r+1-s} - \left(\beta - \sum_{n=1}^{l-1} p_n \right)^{r+1-s} \right]$$

$$f = \frac{1}{2} S_2; \quad \rho = 1 - \beta/v; \quad \beta = \frac{2S_3 + 3S_2}{12f}; \quad \mu = v\rho; \quad S_i(\sum_l p_l)^i - \sum_l (p_l)^i.$$

Under the null hypothesis, U is distributed as $U = \prod_{i=2}^{q} \prod_{j=1}^{p(i)} X_{ij}$, where the X_{ij} are independent and X_{ij} has the density $\beta[x|, (n - pp_i + 1 - j)/2, p_i/2]$.

Lit.: Anderson 1984, p.383 and 386

`ctx.`**`wilks_iblocks_bd_inv`**`(`q, f, *rho*, *omega*`)`

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Calculates the Box-Davis approximation to the qtf and isf.

4.11.8 Distribution of Mauchly's test of sphericity vs general structure

class ctx.**dist_mauchley**(*p*, *bi*, *ci*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

A random variable X follows the distribution of the negative logarithm of the product of p beta variables with parameters a_i and b_i if it is defined as $X = -\log(Y)$, where Y follows a beta product distribution with parameters a_i and b_i. The support interval of X is $(0, +\infty)$.

See also Mauchly [410], Anderson [9], Muirhead [416], Butler [165], Ginzberg [347], pages 92-105, Marques *et al.* [409], Tang and Gupta [511].

dist_mauchley.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables:

The pdf can be calculated (in principle in arbitrary precision) by numerical inversion of the characteristic function, using the algorithm by Gil-Pelaez. The PDF of Y is the inverse Fourier transform of its characteristic function,

$$\text{pdf}_X(x) = \frac{1}{\pi}\int_0^\infty \Re\left(e^{-itx}C_X(t)\right)\,\mathrm{d}t.$$

where $\Re(z)$ denotes the real part of z.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", fisher_f(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_mauchley.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables:

The cdf can be calculated (in principle in arbitrary precision) by numerical inversion of the characteristic function, using the algorithm by Gil-Pelaez. Gil-Pelaez derived the following inversion formula which requires integration of a real-valued function, only. In particular,

$$\text{cdf}_X(x) = \frac{1}{2} - \frac{1}{\pi}\int_0^\infty \Im\left(\frac{e^{-itx}C_X(t)}{t}\right)\,\mathrm{d}t.$$

where $\Im(z)$ denotes the imaginary part of z.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", fisher_f(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_mauchley.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function (sf) of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables:

The sf can be calculated (in principle in arbitrary precision) by numerical inversion of the characteristic function, using the algorithm by Gil-Pelaez. Gil-Pelaez derived the following inversion formula which requires integration of a real-valued function,

only. In particular,

$$\mathrm{sf}_X(x) = \frac{1}{2} + \frac{1}{\pi}\int_0^\infty \Im\left(\frac{e^{-itx}C_X(t)}{t}\right)\mathrm{d}t.$$

where $\Im(z)$ denotes the imaginary part of z.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", fisher_f(mu, sigma).pdf(x))
sf: 6.3563523462564525615615615614561356E-20
```

`dist_mauchley.qtf(`q`)`

Returns $\mathrm{qtf}_X(q)$, the quantile function (qtf) of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables:

There is no known closed exact form for $\mathrm{qtf}_X(q)$ or $\mathrm{isf}_X(q)$. It is computed with Newton iterations where the starting values are from Nagarsenker's approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", fisher_f(mu, sigma).qtf(q))
qtf: 6.3563523462564525615615615614561356E+00
```

`dist_mauchley.isf(`q`)`

Returns $\mathrm{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables:

There is no known closed exact form for $\mathrm{isf}_X(q)$ or $\mathrm{isf}_X(q)$. It is computed with Newton iterations where the starting values are from Nagarsenker's approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.3563523462564525615615615614561356E+00
```

`dist_mauchley.c_x(`t`)`

Returns $C_X(t)$, the characteristic function of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables:

$$C_X(t) = \prod_{j=1}^{p} \frac{\Gamma\left((a_j - it)\right)\Gamma\left((a_j + b_j)\right)}{\Gamma\left(a_j\right)\Gamma\left(a_j + b_j - it\right)}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.3563523462564525615615615614561356E+00
```

dist_mauchley.**m_x**(*t*)

Returns the moment generating function of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables.

$$M_X(t) = \prod_{j=1}^{p} \frac{\Gamma\left((a_j - t)\right)\Gamma\left((a_j + b_j)\right)}{\Gamma\left(a_j\right)\Gamma\left(a_j + b_j - t\right)}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.356352346256452561561561561456135 6E+00
```

dist_mauchley.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function, and its r^{th} derivatives, $K_X^{(r)}(t), r = 1 \ldots k$, of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables.

$$K_X(t) = \sum_{j=1}^{p} \log\left(\Gamma(a_j - t)\right) - \log\left(\Gamma(a_j + b_j - t)\right) + \log\left(\Gamma(a_j + b_j)\right) - \log\left(\Gamma(a_j)\right).$$

$$K_X^{(r)}(t) = (-1)^r \sum_{j=1}^{p} \left(\psi^{(r-1)}(a_j - t) - \psi^{(r-1)}(a_j + b_j - t)\right)$$

where $\psi^{(r)}(\cdot)$ is the polygamma function of order r.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.356352346256452561561561561456135 6E+00
```

dist_mauchley.**moments**(*k*)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables. The moments are calculated from the cumulants.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.356352346256452561561561561456135 6E+00
```

dist_mauchley.**cumulants**(*k*)

Returns the first j cumulants, $\kappa_r, r = 1 \ldots k$, of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables.

$$\kappa_r = (-1)^r \sum_{j=1}^{p} \left(\psi^{(r-1)}(a_j) - \psi^{(r-1)}(a_j + b_j)\right)$$

where $\psi^{(r)}(\cdot)$ is the polygamma function of order r.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.356352346256452561561561561456135 6E+00
```

Approximations

`ctx.`**`mauchley_bd`**(*x*, *f*, *rho*, *omega*)

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

The likelihood criterion for testing the hypothesis that a sample of size N is drawn from a p-variate normal population whose covaraince matrix is proportional to a given matrix Σ_0 is a power of

$$W = |S\Sigma_0^{-1}|^{\frac{1}{2}n} \left(tr(S\Sigma_0^{-1})/p\right)^{\frac{1}{2}pn}$$

where $n = N - 1$ and S is the sample covariance matrix. We have

$$f = \tfrac{1}{2}(p-1)(p+2); \quad \rho = 1 - \frac{2p^2 + p + 2}{6pn}$$

$$\omega_r = \frac{2(-1)^r}{r(r+1)(r+2)\rho^r} \sum_{s=1}^{r+2} \binom{r+2}{s+1} (1-\rho)^{r+1-s} \frac{\delta_s + \frac{1}{2}(s+1)B_s/p^{s-1}}{(\frac{1}{2}^{s-1})},$$

where B_s are the Bernoulli numbers.

`ctx.`**`mauchley_bd_inv`**(*q*, *f*, *rho*, *omega*)

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Calculates the Box-Davis approximation to the qtf and isf.

4.11.9 Distribution of Box's test of equality of covariance matrices, equal sample sizes

class ctx.**dist_box_nsame_cov**(p, bi, ci)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

A random variable X follows the distribution of the negative logarithm of the product of p beta variables with parameters a_i and b_i if it is defined as $X = -\log(Y)$, where Y follows a beta product distribution with parameters a_i and b_i. The support interval of X is $(0, +\infty)$.

See also Anderson [9], Muirhead [416], Butler [165], Ginzberg [347], pages 92-105, Marques *et al.* [409], Tang and Gupta [511].

dist_box_nsame_cov.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables:

The pdf can be calculated (in principle in arbitrary precision) by numerical inversion of the characteristic function, using the algorithm by Gil-Pelaez. The PDF of Y is the inverse Fourier transform of its characteristic function,

$$\text{pdf}_X(x) = \frac{1}{\pi}\int_0^\infty \Re\left(e^{-itx}C_X(t)\right)\,\mathrm{d}t.$$

where $\Re(z)$ denotes the real part of z.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", fisher_f(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_box_nsame_cov.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables:

The cdf can be calculated (in principle in arbitrary precision) by numerical inversion of the characteristic function, using the algorithm by Gil-Pelaez. Gil-Pelaez derived the following inversion formula which requires integration of a real-valued function, only. In particular,

$$\text{cdf}_X(x) = \frac{1}{2} - \frac{1}{\pi}\int_0^\infty \Im\left(\frac{e^{-itx}C_X(t)}{t}\right)\,\mathrm{d}t.$$

where $\Im(z)$ denotes the imaginary part of z.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", fisher_f(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_box_nsame_cov.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function (sf) of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables:

The sf can be calculated (in principle in arbitrary precision) by numerical inversion of the characteristic function, using the algorithm by Gil-Pelaez. Gil-Pelaez derived the following inversion formula which requires integration of a real-valued function,

only. In particular,

$$\mathrm{sf}_X(x) = \frac{1}{2} + \frac{1}{\pi}\int_0^\infty \Im\left(\frac{e^{-itx}C_X(t)}{t}\right)\mathrm{d}t.$$

where $\Im(z)$ denotes the imaginary part of z.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", fisher_f(mu, sigma).pdf(x))
sf: 6.3563523462564525615615615614561356E-20
```

`dist_box_nsame_cov.qtf(`q`)`

Returns $\mathrm{qtf}_X(q)$, the quantile function (qtf) of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables:

There is no known closed exact form for $\mathrm{qtf}_X(q)$ or $\mathrm{isf}_X(q)$. It is computed with Newton iterations where the starting values are from Nagarsenker's approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", fisher_f(mu, sigma).qtf(q))
qtf: 6.3563523462564525615615615614561356E+00
```

`dist_box_nsame_cov.isf(`q`)`

Returns $\mathrm{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables:

There is no known closed exact form for $\mathrm{isf}_X(q)$ or $\mathrm{isf}_X(q)$. It is computed with Newton iterations where the starting values are from Nagarsenker's approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.3563523462564525615615615614561356E+00
```

`dist_box_nsame_cov.c_x(`t`)`

Returns $C_X(t)$, the characteristic function of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables:

$$C_X(t) = \prod_{j=1}^{p} \frac{\Gamma\left((a_j - it)\right)\Gamma\left((a_j + b_j)\right)}{\Gamma\left(a_j\right)\Gamma\left(a_j + b_j - it\right)}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.3563523462564525615615615614561356E+00
```

dist_box_nsame_cov.**m_x**(t)

Returns the moment generating function of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables.

$$M_X(t) = \prod_{j=1}^{p} \frac{\Gamma\left((a_j - t)\right)\Gamma\left((a_j + b_j)\right)}{\Gamma\left(a_j\right)\Gamma\left(a_j + b_j - t\right)}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_box_nsame_cov.**k_x**(t, *k=0*)

Returns $K_X(t)$, the cumulant generating function, and its r^{th} derivatives, $K_X^{(r)}(t), r = 1 \ldots k$, of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables.

$$K_X(t) = \sum_{j=1}^{p} \log\left(\Gamma(a_j - t)\right) - \log\left(\Gamma(a_j + b_j - t)\right) + \log\left(\Gamma(a_j + b_j)\right) - \log\left(\Gamma(a_j)\right).$$

$$K_X^{(r)}(t) = (-1)^r \sum_{j=1}^{p} \left(\psi^{(r-1)}(a_j - t) - \psi^{(r-1)}(a_j + b_j - t)\right)$$

where $\psi^{(r)}(\cdot)$ is the polygamma function of order r.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_box_nsame_cov.**moments**(k)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables. The moments are calculated from the cumulants.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_box_nsame_cov.**cumulants**(k)

Returns the first j cumulants, $\kappa_r, r = 1 \ldots k$, of a random variable X, following the distribution of the negative logarithm of the product of independent beta variables.

$$\kappa_r = (-1)^r \sum_{j=1}^{p} \left(\psi^{(r-1)}(a_j) - \psi^{(r-1)}(a_j + b_j)\right)$$

where $\psi^{(r)}(\cdot)$ is the polygamma function of order r.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", fisher_f(mu, sigma).isf(q))
6.356352346256452561561561561456l356E+00
```

Approximations

`ctx.box_spa`(*x*, *p*, *n1*, *n2*, *results='c'*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Calculates the Luggannini-Rice saddlepoint approximation of the pdf, cdf and sf.

This uses $2 \log W$.

Returns $K_X(s)$, the cumulant generating function, and its j^{th} derivatives, $K_X^{(j)}(s), j = 1 \ldots k$, of a random variable X, following a Box-Davis distribution:

$$K_X(s) = \log \left[\frac{\Gamma_p(n/2 + s)\Gamma_p((n+m)/2)}{\Gamma_p(n/2)\Gamma_p((n+m)/2 + s)} \right].$$

$$K'(s) = \sum_{i=1}^{p} \left[\psi\left(\tfrac{1}{2}n + s - \tfrac{1}{2}(i-1)\right) - \psi\left(\tfrac{1}{2}(n+m) + s - \tfrac{1}{2}(i-1)\right) \right]$$

where $\Gamma_p(\cdot)$ is the multivariate gamma function and $\psi(\cdot)$ is the digamma function.

`ctx.box_spa_inv`(*x*, *n*, *results='qtf'*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Calculates the inverse Jensen saddlepoint approximation of the qtf and isf.

This uses $2 \log W$.

4.11.10 Distribution of Box's test of equality of k covariance matrices, unequal sample sizes

class ctx.**dist_box_cov**(p, k, ni)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The distribution of Box's test of equality of k covariance matrices is a continuous probability distribution with $p \geq 1$ predictor variables, error degress of freedom $n_i \geq 1$, and the support interval $(0, 1)$. See also Anderson [9], Muirhead [416], Butler [165], Box [35].

dist_box_cov.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following the distribution of Box's LRTs.

The pdf can be calculated (in principle in arbitrary precision) by numerical inversion of the characteristic function, using the algorithm by Gil-Pelaez. The PDF of Y is the inverse Fourier transform of its characteristic function,

$$\mathrm{pdf}_X(x) = \frac{1}{\pi}\int_0^\infty \Re\left(e^{-itx}C_X(t)\right)\mathrm{d}t.$$

where $\Re(z)$ denotes the real part of z.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", box_cov(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_box_cov.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following the distribution of Box's LRTs.

The cdf can be calculated (in principle in arbitrary precision) by numerical inversion of the characteristic function, using the algorithm by Gil-Pelaez. Gil-Pelaez derived the following inversion formula which requires integration of a real-valued function, only. In particular,

$$\mathrm{cdf}_X(x) = \frac{1}{2} - \frac{1}{\pi}\int_0^\infty \Im\left(\frac{e^{-itx}C_X(t)}{t}\right)\mathrm{d}t.$$

where $\Im(z)$ denotes the imaginary part of z.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", box_cov(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_box_cov.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following the distribution of Box's LRTs.

The sf can be calculated (in principle in arbitrary precision) by numerical inversion of the characteristic function, using the algorithm by Gil-Pelaez. Gil-Pelaez derived the following inversion formula which requires integration of a real-valued function, only. In particular,

$$\mathrm{sf}_X(x) = \frac{1}{2} + \frac{1}{\pi}\int_0^\infty \Im\left(\frac{e^{-itx}C_X(t)}{t}\right)\mathrm{d}t.$$

where $\Im(z)$ denotes the imaginary part of z.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", box_cov(mu, sigma).pdf(x))
sf: 6.3563523462564525615615615614561356E-20
```

`dist_box_cov.qtf(`q`)`

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following the distribution of Box's LRTs:

There is no known closed form for the quantile function $\text{cdf}_X^{-1}(q)$: It is computed with Newton iterations where the starting values are from a central chi-square approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", box_cov(mu, sigma).qtf(q))
qtf: 6.3563523462564525615615615614561356E+00
```

`dist_box_cov.isf(`q`)`

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following the distribution of Box's LRTs:

$$\text{isf}_X(q) = \text{qtf}_X(1-q) = \text{cdf}_X^{-1}(1-q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", box_cov(mu, sigma).isf(q))
6.3563523462564525615615615614561356E+00
```

`dist_box_cov.c_x(`t`)`

Returns $C_X(t)$, the characteristic function of a random variable X, following the distribution of Box's LRTs:

The characteristic function $C_X(t)$ of $M = -2\log(W)$ is given by

$$C_X(t) = K\left(\frac{\prod_{j=1}^{k} 2y_j^{2y_j}}{\prod_{l=1}^{m} 2x_l^{2x_l}}\right)^{-2it} \frac{\prod_{l=1}^{m}\Gamma[x_l(1-2it)+\xi_l]}{\prod_{j=1}^{k}\Gamma[y_j(1-2it)+\eta_j]}, \text{where}$$

$$K = \frac{\prod_{j=1}^{b}\Gamma(y_j+\eta_j)}{\prod_{k=1}^{a}\Gamma(x_k+\xi_k)}, \quad \text{and} \quad \sum_{k=1}^{a} x_k = \sum_{j=1}^{b} y_j.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", box_cov(mu, sigma).c_x(t))
6.3563523462564525615615615614561356E+00
```

`dist_box_cov.m_x(`t`)`

Returns $M_X(t)$, the moment generating function of a random variable X, following the distribution of Box's LRTs:

$$M_X(t) = K\left(\frac{\prod_{j=1}^{k} 2y_j^{2y_j}}{\prod_{l=1}^{m} 2x_l^{2x_l}}\right)^{-2t} \frac{\prod_{l=1}^{m}\Gamma[x_l(1-2t)+\xi_l]}{\prod_{j=1}^{k}\Gamma[y_j(1-2t)+\eta_j]}, \text{where}$$

$$K = \frac{\prod_{j=1}^{b} \Gamma(y_j + \eta_j)}{\prod_{k=1}^{a} \Gamma(x_k + \xi_k)}, \quad \text{and} \quad \sum_{k=1}^{a} x_k = \sum_{j=1}^{b} y_j.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", box_cov(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

`dist_box_cov.`**`k_x`**`(`*s*, *k=0*`)`

Returns $K_X(t)$, the cumulant generating function, and its j^{th} derivative, $K_X^{(j)}(t), j = 1 \ldots k$, of a random variable X, following the distribution of Box's LRTs:

The cumulant generating function and the j^{th} derivative of the cumulant generating function of $M = -2\log(W)$ are given by

$$K_X(t) = 2\left(\sum_{l=1}^{m} x_l \log(x_l) - \sum_{r=1}^{k} y_r \log(y_r) - \sum_{l=1}^{m} x_l \psi(x_l(1-2t)+\xi_l) + \sum_{r=1}^{k} y_r \psi(y_r(1-2t)+\eta_r)\right), \quad \text{and}$$

$$K_X^{(j)}(t) = \sum_{l=1}^{m} (-2x_l)^j \psi^{(j-1)}(x_l(1-2t)+\xi_l) - \sum_{r=1}^{k} (-2y_r)^j \psi^{(j-1)}(y_r(1-2t)+\eta_r), \quad j \geq 2,$$

where $\psi(\cdot)$ is the digamma function, and its derivatives $\psi^{(j)}(\cdot)$ are polygamma functions.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", box_cov(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

`dist_box_cov.`**`moments`**`(`*k*`)`

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following the distribution of Box's LRTs. The moments are calculated from the cumulants.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", box_cov(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

`dist_box_cov.`**`cumulants`**`(`*k*`)`

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following the distribution of Box's LRTs

The cumulants κ_j of $M = -2\log(W)$ are given by

$$\kappa_1 = 2\left(\sum_{l=1}^{m} x_l \log(x_l) - \sum_{r=1}^{k} y_r \log(y_r) - \sum_{l=1}^{m} x_l \psi(x_l+\xi_l) + \sum_{r=1}^{k} y_r \psi(y_r+\eta_r)\right), \quad \text{and}$$

$$\kappa_j = \sum_{l=1}^{m} (-2x_l)^j \psi^{(j-1)}(x_l+\xi_l) - \sum_{r=1}^{k} (-2y_r)^j \psi^{(j-1)}(y_r+\eta_r), \quad j \geq 2,$$

where $\psi(\cdot)$ is the digamma function, and its derivatives $\psi^{(j)}(\cdot)$ are polygamma functions.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", box_cov(mu, sigma).cumulants(k))
6.356352346256452561561561561456135 6E+00
```

Additional information

`ctx.log_box_cov_gp(k)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Calculates the pdf, cdf and sf from the characteristic function using the procedure of Gil-Pelaez (see *gil_pelaez_pdf()* and *gil_pelaez_cdf()*).

This uses $U = \log 2W$.

In this section we discuss a general class of distributions functions of random variables $M = -2\log(W)$, when the moments of W are products and ratios of gamma functions. W is typically a LRT statistic. M is a special case of the Box-Davis statistic discussed in the previous section.

A random variable $W(0 \leq W \leq 1)$ is said to be of Box type if its h th moment is given by

$$\mathrm{E}[W^h] = K \left(\frac{\prod_{j=1}^{b} y_j^{y_j}}{\prod_{k=1}^{a} x_k^{x_k}} \right)^h \frac{\prod_{k=1}^{a} \Gamma[x_k(1+h)+\xi_k]}{\prod_{j=1}^{b} \Gamma[y_j(1+h)+\eta_j]}, \quad h = 0, 1, \ldots,$$

where $\Gamma(\cdot)$ denotes the gamma function, K is a constant such that $\mathrm{E}[W^0] = 1$, i.e.

$$K = \frac{\prod_{j=1}^{b} \Gamma(y_j+\eta_j)}{\prod_{k=1}^{a} \Gamma(x_k+\xi_k)}, \quad \text{and} \quad \sum_{k=1}^{a} x_k = \sum_{j=1}^{b} y_j.$$

The l.r.t. statistic λ_6 to test the null hypothesis $H_{04} : \Sigma_1 = \ldots = \Sigma_q$, i.e. the equality of q covariance matrices from p-multivariate normal or elliptically contoured distributions is given by

$$\lambda_6 = \frac{n^{np}}{\prod_{k=1}^{q} n_k^{n_k p}} \frac{\prod_{k=1}^{q} |A_k|^{n_k}}{|A|^n}$$

where N_i the sample size in group i, $n_i = N_i - 1, n = \sum_i n_i$, A_k is equal to n_k times the m.l.e. of $\Sigma_k (k = 1, \ldots, q)$, and $A = A_1 + \ldots + A_q$.

The distribution of M can be expressed as a Box-Davis distribution of the Box type with the following parameter choices for a, b, x_k, ξ_k, y_j and η_j:

$$a = pq, \quad b = p, \quad y_j = n/2, \quad \eta_j = (1-j)/2, \quad j = 1 \ldots b$$

$$x_k = n_g/2, \quad \xi_k = (1-i)/2, \quad k = 1 \ldots a = (g-1)p + i, \quad \text{where } g = 1 \ldots q, \quad i = 1 \ldots p$$

For further details, see Anderson_book_2003, pages 419-420.

Now, let $X_k \sim N_p(\mu_k, \Sigma_k)$, for $k = 1, ..., q$. We want to test the hypothesis that the q normal populations are equally distributed. That is, we want to test that the mean vectors μ_k are equal for all $k = 1, ..., q$, as well as the covariance matrices Σ_k are equal for all $k = 1, ..., q$. Then, the null hypothesis is given as

$H_0 : \mu_1 = ... = \mu_q$ and $\Sigma_1 = ... = \Sigma_k$.

Here, the null hypothesis H_0 and the LRT statistic can be decomposed: $\Lambda = \Lambda_{Means} \times \Lambda_{Covariances}$, where (first) $\Lambda_{Covariances}$ represents the LRT for testing equality of covariance matrices of given q normal populations, and (second) Λ_{Means} represents (conditionally) the LRT for testing equality of means of given q normal populations. Under null hypothesis, distributions of $\Lambda_{Covariances}$ and Λ_{Means} are independent, and the distribution of the test statistic Lambda is $\Lambda = \Lambda_{Means} \times \Lambda_{Covariances}$

Let p be the number of variables, q the number of groups, N_i the sample size in group i, $N = \sum_i N_i$. Then the distribution of M can be expressed as a Box-Davis distribution of the Box type with the following parameter choices for a, b, x_k, ξ_k, y_j and η_j:

$$a = pq, \quad b = p \quad y_j = N/2, \quad \eta_j = -j/2, \quad j = 1 \dots b$$

$$x_k = N_g/2, \quad \xi_k = -i/2, \quad k = 1 \dots a = (g-1)p + i, \quad \text{where } g = 1 \dots q, \quad i = 1 \dots p$$

If the sample sizes are the same, the distribution of the test statistic Lambda is

$$\Lambda = \Lambda_{Means} \times \Lambda_{Covariances}, \sim (\prod_{k=1}^{q} \prod_{j=1}^{p} (B_{jk})^{n/2}) \times (\prod_{j=1}^{p} (B_j)^{nq/2})$$

where the B_{jk} and B_j are mutually independent beta distributed random variables. Here we assume that n is equal sample size for each sample, $k = 1, ..., q, n > p$. For further details, see Anderson_book_2003, pages 420-421.

Approximations

`ctx.box_davis_ecf(`*x*, *p*, *k*, *ni*, *results='cdf'*`)`

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Calculates the Edgeworth approximation to the pdf, cdf and sf.

`ctx.box_davis_ecf_inv(`*q*, *p*, *k*, *ni*, *results='cdf'*`)`

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Calculates the Cornish-Fisher approximation to the qtf and isf.

`ctx.box_cov_bd(`*x*, *f*, *rho*, *omega*`)`

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Calculates the Box-Davis approximation to the pdf, cdf and sf.

For Box-type distributions, the parameters of the Box-Davis expansion are given by

Let p be the number of variables, k the number of groups, v_i the sample size in groups i, $N = \sum_i v_i$.

$$\omega = \frac{(-1)^r k}{r(r+1)(r+2)\mu^r} \sum_{s=1}^{r+1} \binom{s+1}{r+2} 2^s \delta_s \gamma_s \beta^{r+1-s}$$

$$\gamma_s = \frac{1}{k} \sum_{i=1}^{k} \left(\frac{v}{v_i}\right)^{s-1} - \frac{1}{k^s}; \quad \text{for equal } v_i : \gamma_s = 1 - \frac{1}{k^s}$$

$$f = \frac{p(p+1)(k-1)}{2}; \quad \rho = \frac{2p^2 + 3p - 1}{6(p+1)(k-1)} \left(-\frac{1}{N} + \sum_{i=1}^{k} \frac{1}{n_i}\right);$$

$$v = \frac{N}{k}; \quad \mu + \rho v = \frac{N\rho}{k}; \quad \beta = (1-\rho)v.$$

Korin (1969), Anderson 1984, p.420

`ctx.box_cov_bd_inv(`*q*, *f*, *rho*, *omega*`)`

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Calculates the Box-Davis approximation to the qtf and isf.

4.11.11 Distribution of Box's test for same multivariate normal distributions, unequal sample sizes

class ctx.**dist_box_mvn**(p, k, ni)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The distribution of Box's test for same multivariate normal distributions is a continuous probability distribution with $p \geq 1$ predictor variables, error degress of freedom $n_i \geq 1$, and the support interval $(0, 1)$. See also Anderson [9], Muirhead [416], Butler [165], Box [35].

dist_box_mvn.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following the distribution of Box's LRTs.

The pdf can be calculated (in principle in arbitrary precision) by numerical inversion of the characteristic function, using the algorithm by Gil-Pelaez. The PDF of Y is the inverse Fourier transform of its characteristic function,

$$\mathrm{pdf}_X(x) = \frac{1}{\pi}\int_0^\infty \Re\left(e^{-itx}C_X(t)\right)\mathrm{d}t.$$

where $\Re(z)$ denotes the real part of z.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", box_mvn(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_box_mvn.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following the distribution of Box's LRTs.

The cdf can be calculated (in principle in arbitrary precision) by numerical inversion of the characteristic function, using the algorithm by Gil-Pelaez. Gil-Pelaez derived the following inversion formula which requires integration of a real-valued function, only. In particular,

$$\mathrm{cdf}_X(x) = \frac{1}{2} - \frac{1}{\pi}\int_0^\infty \Im\left(\frac{e^{-itx}C_X(t)}{t}\right)\mathrm{d}t.$$

where $\Im(z)$ denotes the imaginary part of z.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", box_mvn(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_box_mvn.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following the distribution of Box's LRTs.

The sf can be calculated (in principle in arbitrary precision) by numerical inversion of the characteristic function, using the algorithm by Gil-Pelaez. Gil-Pelaez derived the following inversion formula which requires integration of a real-valued function, only. In particular,

$$\mathrm{sf}_X(x) = \frac{1}{2} + \frac{1}{\pi}\int_0^\infty \Im\left(\frac{e^{-itx}C_X(t)}{t}\right)\mathrm{d}t.$$

where $\Im(z)$ denotes the imaginary part of z.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", box_mvn(mu, sigma).pdf(x))
sf: 6.3563523462564525615615615614561356E-20
```

`dist_box_mvn.qtf(`q`)`

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following the distribution of Box's LRTs:

There is no known closed form for the quantile function $\text{cdf}_X^{-1}(q)$: It is computed with Newton iterations where the starting values are from a central chi-square approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", box_mvn(mu, sigma).qtf(q))
qtf: 6.3563523462564525615615615614561356E+00
```

`dist_box_mvn.isf(`q`)`

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following the distribution of Box's LRTs:

$$\text{isf}_X(q) = \text{qtf}_X(1-q) = \text{cdf}_X^{-1}(1-q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", box_mvn(mu, sigma).isf(q))
6.3563523462564525615615615614561356E+00
```

`dist_box_mvn.c_x(`t`)`

Returns $C_X(t)$, the characteristic function of a random variable X, following the distribution of Box's LRTs:

The characteristic function $C_X(t)$ of $M = -2\log(W)$ is given by

$$C_X(t) = K\left(\frac{\prod_{j=1}^{k} 2y_j^{2y_j}}{\prod_{l=1}^{m} 2x_l^{2x_l}}\right)^{-2it} \frac{\prod_{l=1}^{m}\Gamma[x_l(1-2it)+\xi_l]}{\prod_{j=1}^{k}\Gamma[y_j(1-2it)+\eta_j]}, \text{where}$$

$$K = \frac{\prod_{j=1}^{b}\Gamma(y_j+\eta_j)}{\prod_{k=1}^{a}\Gamma(x_k+\xi_k)}, \quad \text{and} \quad \sum_{k=1}^{a} x_k = \sum_{j=1}^{b} y_j.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", box_mvn(mu, sigma).c_x(t))
6.3563523462564525615615615614561356E+00
```

`dist_box_mvn.m_x(`t`)`

Returns $M_X(t)$, the moment generating function of a random variable X, following the distribution of Box's LRTs:

$$M_X(t) = K\left(\frac{\prod_{j=1}^{k} 2y_j^{2y_j}}{\prod_{l=1}^{m} 2x_l^{2x_l}}\right)^{-2t} \frac{\prod_{l=1}^{m}\Gamma[x_l(1-2t)+\xi_l]}{\prod_{j=1}^{k}\Gamma[y_j(1-2t)+\eta_j]}, \text{where}$$

$$K = \frac{\prod_{j=1}^{b} \Gamma(y_j + \eta_j)}{\prod_{k=1}^{a} \Gamma(x_k + \xi_k)}, \quad \text{and} \quad \sum_{k=1}^{a} x_k = \sum_{j=1}^{b} y_j.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", box_mvn(mu, sigma).c_x(t))
6.356352346256452561561561456135 6E+00
```

dist_box_mvn.**k_x**(*s*, *k=0*)

Returns $K_X(s)$, the cumulant generating function, and its j^{th} derivatives, $K_X^{(j)}(s), j = 1 \ldots k$, of a random variable X, following the distribution of Box's LRTs:

The cumulant generating function and the j th derivative of the cumulant generating function ` $M = -2\log(W)$ are given by

$$K_X(t) = 2\left(\sum_{i=1}^{m} x_i \log(x_i) - \sum_{r=1}^{k} y_r \log(y_r) - \sum_{l=1}^{m} x_l \psi(x_l(1-2t)+\xi_l) + \sum_{r=1}^{k} y_r \psi(y_r+\eta_r)\right), \quad \text{and}$$

$$K_X^{(j)}(t) = \sum_{i=1}^{m} (-2x_l)^j \psi^{(j-1)}(x_l(1-2t)+\xi_l) - \sum_{r=1}^{k} (-2y_r(1-2t))^j \psi^{(j-1)}(y_r(1-2t)+\eta_r), \quad j \geq 2,$$

where $\psi(\cdot)$ is the digamma function, and its derivatives $\psi^{(j)}(\cdot)$ are polygamma functions.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", box_mvn(mu, sigma).k_x(t, k))
6.356352346256452561561561456135 6E+00
```

dist_box_mvn.**moments**(*k*)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following the distribution of Box's LRTs. The moments are calculated from the cumulants.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", box_mvn(mu, sigma).moments(k))
6.356352346256452561561561456135 6E+00
```

dist_box_mvn.**cumulants**(*k*)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following the distribution of Box's LRTs

The cumulants κ_j of $M = -2\log(W)$ are given by

$$\kappa_1 = 2\left(\sum_{i=1}^{m} x_i \log(x_i) - \sum_{r=1}^{k} y_r \log(y_r) - \sum_{i=1}^{m} x_i \psi(x_i+\xi_i) + \sum_{r=1}^{k} y_r \psi(y_r+\eta_r)\right), \quad \text{and}$$

$$\kappa_j = \sum_{i=1}^{m} (-2x_i)^j \psi^{(j-1)}(x_i+\xi_i) - \sum_{r=1}^{k} (-2y_r)^j \psi^{(j-1)}(y_r+\eta_r), \quad j \geq 2,$$

where $\psi(\cdot)$ is the digamma function, and its derivatives $\psi^{(j)}(\cdot)$ are polygamma functions.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", box_mvn(mu, sigma).cumulants(k))
6.356352346256452561561561561456135 6E+00
```

Additional information

In this section we discuss a general class of distributions functions of random variables $M = -2\log(W)$, when the moments of W are products and ratios of gamma functions. W is typically a LRT statistic. M is a special case of the Box-Davis statistic discussed in the previous section.

A random variable $W(0 \leq W \leq 1)$ is said to be of Box type if its h th moment is given by

$$\mathrm{E}[W^h] = K\left(\frac{\prod_{j=1}^{b} y_j^{y_j}}{\prod_{k=1}^{a} x_k^{x_k}}\right)^h \frac{\prod_{k=1}^{a}\Gamma[x_k(1+h)+\xi_k]}{\prod_{j=1}^{b}\Gamma[y_j(1+h)+\eta_j]}, \quad h = 0, 1, \ldots,$$

where $\Gamma(\cdot)$ denotes the gamma function, K is a constant such that $\mathrm{E}[W^0] = 1$, i.e.

$$K = \frac{\prod_{j=1}^{b}\Gamma(y_j+\eta_j)}{\prod_{k=1}^{a}\Gamma(x_k+\xi_k)}, \quad \text{and} \quad \sum_{k=1}^{a} x_k = \sum_{j=1}^{b} y_j.$$

The l.r.t. statistic λ_6 to test the null hypothesis $H_{04} : \Sigma_1 = \ldots = \Sigma_q$, i.e. the equality of q covariance matrices from p-multivariate normal or elliptically contoured distributions is given by

$$\lambda_6 = \frac{n^{np}}{\prod_{k=1}^{q} n_k^{n_k p}} \frac{\prod_{k=1}^{q}|A_k|^{n_k}}{|A|^n}$$

where N_i the sample size in group i, $n_i = N_i - 1, n = \sum_i n_i$, A_k is equal to n_k times the m.l.e. of $\Sigma_k (k = 1, \ldots, q)$, and $A = A_1 + \ldots + A_q$.

The distribution of M can be expressed as a Box-Davis distribution of the Box type with the following parameter choices for a, b, x_k, ξ_k, y_j and η_j:

$$a = pq, \quad b = p, \quad y_j = n/2, \quad \eta_j = (1-j)/2, \quad j = 1 \ldots b$$

$$x_k = n_g/2, \quad \xi_k = (1-i)/2, \quad k = 1 \ldots a = (g-1)p + i, \quad \text{where } g = 1 \ldots q, \quad i = 1 \ldots p$$

For further details, see Anderson_book_2003, pages 419-420.

Now, let $X_k \sim N_p(\mu_k, \Sigma_k)$, for $k = 1, ..., q$. We want to test the hypothesis that the q normal populations are equally distributed. That is, we want to test that the mean vectors μ_k are equal for all $k = 1, ..., q$, as well as the covariance matrices Σ_k are equal for all $k = 1, ..., q$. Then, the null hypothesis is given as

$H_0 : \mu_1 = ... = \mu_q$ and $\Sigma_1 = ... = \Sigma_k$.

Here, the null hypothesis H_0 and the LRT statistic can be decomposed: $\Lambda = \Lambda_{Means} \times \Lambda_{Covariances}$, where (first) $\Lambda_{Covariances}$ represents the LRT for testing equality of covariance matrices of given q normal populations, and (second) Λ_{Means} represents (conditionally) the LRT for testing equality of means of given q normal populations. Under null hypothesis, distributions of $\Lambda_{Covariances}$ and Λ_{Means} are independent, and the distribution of the test statistic Lambda is $\Lambda = \Lambda_{Means} \times \Lambda_{Covariances}$

Let p be the number of variables, q the number of groups, N_i the sample size in group i, $N = \sum_i N_i$. Then the distribution of M can be expressed as a Box-Davis distribution of the Box type with the following parameter choices for a, b, x_k, ξ_k, y_j and η_j:

$$a = pq, \quad b = p \quad y_j = N/2, \quad \eta_j = -j/2, \quad j = 1 \ldots b$$

$$x_k = N_g/2, \quad \xi_k = -i/2, \quad k = 1 \ldots a = (g-1)p + i, \quad \text{where } g = 1 \ldots q, \quad i = 1 \ldots p$$

If the sample sizes are the same, the distribution of the test statistic Lambda is

$$\Lambda = \Lambda_{Means} \times \Lambda_{Covariances}, \sim (\prod_{k=1}^{q}\prod_{j=1}^{p}(B_{jk})^{n/2}) \times (\prod_{j=1}^{p}(B_j)^{nq/2})$$

where the B_{jk} and B_j are mutually independent beta distributed random variables. Here we assume that n is equal sample size for each sample, $k = 1, ..., q, n > p$. For further details, see Anderson_book_2003, pages 420-421.

Approximations

`ctx.box_means_cov_bd(`x, f, *rho*, *omega*`)`

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Calculates the Box-Davis approximation to the pdf, cdf and sf.

For Box-type distributions, the parameters of the Box-Davis expansion are given by

$$`\theta = \min_{i,j}(x_i, y_j)`,$$

$$f = -2\left[\sum_{k=1}^{a}\xi_k - \sum_{j=1}^{b}\eta_j - \tfrac{1}{2}(a-b)\right],$$

$$\rho = 1 - \frac{1}{f}\left[\sum_{k=1}^{a}x_k^{-1}\left(\xi_k^2 - \xi_k + \tfrac{1}{6}\right) - \sum_{j=1}^{b}y_j^{-1}\left(\eta_j^2 - \eta_j + \tfrac{1}{6}\right)\right],$$

$$\omega_r = \frac{(-1)^{r+1}}{r(r+1)}\left[\sum_{k=1}^{a}\frac{B_{r+1}((1-\rho)x_k + \xi_k)}{(\rho x_k)^r} - \sum_{j=1}^{b}\frac{B_{r+1}((1-\rho)y_j + \eta_j)}{(\rho y_j)^r}\right],$$

$$\begin{aligned}\log(K_B) &= \log(K) + \frac{1}{2}(m-k)\log(2\pi) - \frac{f}{2}\log(\rho) \\ &\quad + \sum_{i=1}^{m}\left(x_i + \xi_i - \frac{1}{2}\right)\log(x_i) - \sum_{i=1}^{k}\left(y_i + \eta_i - \frac{1}{2}\right)\log(x_i)\end{aligned} \tag{4.39}$$

See Siotani p. 356

`ctx.box_means_cov_bd_inv(`q, f, *rho*, *omega*`)`

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Calculates the Box-Davis approximation to the qtf and isf.

4.11.12 Distribution of the modified likelihood ratio test (LRT) for a given covariance matrix

`class ctx.dist_lrt_s0(`p, n`)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

The distribution of the modified (LRT) for a given covariance matrix is a continuous probability distribution with $p \geq 1$ predictor variables, error degress of freedom $n \geq 1$, and the support interval $(0, 1)$. See also Anderson [9], Davis [204].

The modified likelihood criterion λ_1^* for testing the hypothesis that a sample of size N is drawn from a p-variate normal population with a given covariance matrix $\mathbf{\Sigma}_0$ is given by

$$\lambda_1^* = e^{\frac{1}{2}pn}\left|\boldsymbol{S}\boldsymbol{\Sigma}_0^{-1}\right|^{\frac{1}{2}n}\exp\left(-\tfrac{1}{2}n\,\mathrm{tr}\left(\boldsymbol{S}\boldsymbol{\Sigma}_0^{-1}\right)\right)$$

where $n = N - 1$ and $\boldsymbol{S}$ is the sample covariance matrix.

`dist_lrt_s0.pdf(`x`)`

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following the distribution of Box's LRTs.

The pdf can be calculated (in principle in arbitrary precision) by numerical inversion of the characteristic function, using the algorithm by Gil-Pelaez. The PDF of Y is the inverse Fourier transform of its characteristic function,

$$\mathrm{pdf}_X(x) = \frac{1}{\pi}\int_0^\infty \Re\left(e^{-itx}C_X(t)\right)\mathrm{d}t.$$

where $\Re(z)$ denotes the real part of z.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", lrt_s0(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

`dist_lrt_s0.cdf(`x`)`

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following the distribution of Box's LRTs.

The cdf can be calculated (in principle in arbitrary precision) by numerical inversion of the characteristic function, using the algorithm by Gil-Pelaez. Gil-Pelaez derived the following inversion formula which requires integration of a real-valued function, only. In particular,

$$\mathrm{cdf}_X(x) = \frac{1}{2} - \frac{1}{\pi}\int_0^\infty \Im\left(\frac{e^{-itx}C_X(t)}{t}\right)\mathrm{d}t.$$

where $\Im(z)$ denotes the imaginary part of z.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", lrt_s0(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

`dist_lrt_s0.sf(`x`)`

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following the distribution of Box's LRTs.

The sf can be calculated (in principle in arbitrary precision) by numerical inversion of the characteristic function, using the algorithm by Gil-Pelaez. Gil-Pelaez derived the following inversion formula which requires integration of a real-valued function, only. In particular,

$$\mathrm{sf}_X(x) = \frac{1}{2} + \frac{1}{\pi}\int_0^\infty \Im\left(\frac{e^{-itx}C_X(t)}{t}\right)\mathrm{d}t.$$

where $\Im(z)$ denotes the imaginary part of z.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", lrt_s0(mu, sigma).pdf(x))
sf: 6.3563523462564525615615615614561356E-20
```

`dist_lrt_s0.qtf(q)`

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following the distribution of Box's LRTs:

There is no known closed form for the quantile function $\text{cdf}_X^{-1}(q)$: It is computed with Newton iterations where the starting values are from a central chi-square approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", lrt_s0(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

`dist_lrt_s0.isf(q)`

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following the distribution of Box's LRTs:

$$\text{isf}_X(q) = \text{qtf}_X(1-q) = \text{cdf}_X^{-1}(1-q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", lrt_s0(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

`dist_lrt_s0.c_x(t)`

Returns $C_X(t)$, the characteristic function of a random variable X, following the distribution of Box's LRTs:

The characteristic function of $M = -2\log(\lambda_1^*)$ has the form (see Anderson 2003, page 441, equation 16)

$$C_X(t) = \left(\frac{2e}{n}\right)^{-it\cdot pn} (1-2it)^{-\frac{1}{2}pn(1-2it)} \prod_{j=1}^{p} \frac{\Gamma\left[\frac{1}{2}(n+1-j) - it\cdot n\right]}{\Gamma\left[\frac{1}{2}(n+1-j)\right]}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", lrt_s0(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

`dist_lrt_s0.m_x(t)`

Returns $M_X(t)$, the moment generating function of a random variable X, following the distribution of Box's LRTs:

$$M_X(t) = \left(\frac{2e}{n}\right)^{-t\cdot pn} (1-2t)^{-\frac{1}{2}pn(1-2t)} \prod_{j=1}^{p} \frac{\Gamma\left[\frac{1}{2}(n+1-j) - t\cdot n\right]}{\Gamma\left[\frac{1}{2}(n+1-j)\right]}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", lrt_s0(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_lrt_s0.**k_x**(*s*, *k=0*)

Returns $K_X(s)$, the cumulant generating function, and its j^{th} derivatives, $K_X^{(j)}(s), j = 1 \ldots k$, of a random variable X, following the distribution of Box's LRTs:

$$K_X(t) = \log(M_X(t))$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", lrt_s0(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

dist_lrt_s0.**moments**(*k*)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following the distribution of Box's LRTs. The moments are calculated from the cumulants.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", lrt_s0(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_lrt_s0.**cumulants**(*k*)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following the distribution of Box's LRTs

The cumulants κ_j of $M = -2\log(W)$ are given by

$$\kappa_1 = tbd$$

$$\kappa_j = tbd$$

where $\psi(\cdot)$ is the digamma function, and its derivatives $\psi^{(j)}(\cdot)$ are polygamma functions.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", lrt_s0(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

Additional information

We have for the Box-Davis expansion (see Davis 1971, equations 20-21):

$$f = \tfrac{1}{2}p(p+1); \quad \rho = 1 - \frac{2p^2+3p-1}{6n(p+1)}$$

$$\omega_r = \frac{2(-1)^r}{r(r+1)(r+2)\rho^r} \sum_{s=1}^{r+1} \binom{r+2}{s+1} (1-\rho)^{r+1-s} \frac{\delta_s}{(\frac{1}{2}n)^{s-1}},$$

where δ is defined in Box (1949). For tables see Korin 1968 and Davis 1971.

Approximations

ctx.**lrt_vc0_bd**(q, f, *rho*, *omega*)

where ctx is ipm, dec, mpm, or gmp.

Calculates the Box-Davis approximation to the qtf and isf.

The modified likelihood criterion λ_1^* for testing the hypothesis that a sample of size N is drawn from a p-variate normal population with a given covariance matrix $\boldsymbol{\Sigma}_0$ is given by

$$\lambda_1^* = e^{\frac{1}{2}pn} \left|\boldsymbol{S}\boldsymbol{\Sigma}_0^{-1}\right|^{\frac{1}{2}n} \exp\left(-\tfrac{1}{2}n \operatorname{tr}\left(\boldsymbol{S}\boldsymbol{\Sigma}_0^{-1}\right)\right)$$

where $n = N - 1$ and $\boldsymbol{S}$ is the sample covariance matrix.

We have for the Box-Davis expansion (see Davis 1971, equations 20-21):

$$f = \tfrac{1}{2}p(p+1); \quad \rho = 1 - \frac{2p^2 + 3p - 1}{6n(p+1)}; \quad \delta_{s,p} = -\frac{s+1}{2}\sum_{j=0}^{p-1} B_s(-j/2)$$

$$\omega_r = \frac{2(-1)^r}{r(r+1)(r+2)\rho^r} \sum_{s=1}^{r+1} \binom{r+2}{s+1} (1-\rho)^{r+1-s} \frac{\delta_{s,p}}{(\frac{1}{2}n)^{s-1}},$$

where $B_s(\cdot)$ is the Bernoulli polynomial of degree s. For tables see Korin 1968 and Davis 1971.

ctx.**lrt_vc0_bd_inv**(q, f, *rho*, *omega*)

where ctx is ipm, dec, mpm, or gmp.

Calculates the Box-Davis approximation to the qtf and isf.

4.11.13 Distribution of the modified likelihood ratio test (LRT) for a given covariance matrix and mean vector

class ctx.**dist_lrt_x0_s0**(p, n)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The distribution of the modified (LRT) for a given covariance matrix and mean vector is a continuous probability distribution with $p \geq 1$ predictor variables, error degress of freedom $n \geq 1$, and the support interval $(0, 1)$. See also Anderson [9], Davis [204]. For tables see Nagarsenker 1974

The likelihood criterion λ_2 for testing the hypothesis that a sample of size N is drawn from a p-variate normal population with a given covariance matrix $\boldsymbol{\Sigma}_0$ and mean vector $\boldsymbol{\mu}_0$ is given by

$$\lambda_2 = \left(\frac{e}{N}\right)^{\frac{1}{2}pN} \left|\boldsymbol{S}\boldsymbol{\Sigma}_0^{-1}\right|^{\frac{1}{2}N} \exp\left(-\tfrac{1}{2}\left[\operatorname{tr}\left(\boldsymbol{S}\boldsymbol{\Sigma}_0^{-1}\right) + N(\bar{\boldsymbol{x}} - \boldsymbol{\mu}_0)'\boldsymbol{\Sigma}_0(\bar{\boldsymbol{x}} - \boldsymbol{\mu}_0)\right]\right)$$

where $\boldsymbol{S}$ is the sample covariance matrix and $\bar{\boldsymbol{x}}$ is the sample mean vector.

dist_lrt_x0_s0.**pdf**(x)

Returns $\operatorname{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following the distribution of Box's LRTs.

The pdf can be calculated (in principle in arbitrary precision) by numerical inversion of the characteristic function, using the algorithm by Gil-Pelaez. The PDF of Y is the inverse Fourier transform of its characteristic function,

$$\operatorname{pdf}_X(x) = \frac{1}{\pi}\int_0^\infty \Re\left(e^{-itx}C_X(t)\right)\mathrm{d}t.$$

where $\Re(z)$ denotes the real part of z.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", lrt_x0_s0(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_lrt_x0_s0.**cdf**(x)

Returns $\operatorname{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following the distribution of Box's LRTs.

The cdf can be calculated (in principle in arbitrary precision) by numerical inversion of the characteristic function, using the algorithm by Gil-Pelaez. Gil-Pelaez derived the following inversion formula which requires integration of a real-valued function, only. In particular,

$$\operatorname{cdf}_X(x) = \frac{1}{2} - \frac{1}{\pi}\int_0^\infty \Im\left(\frac{e^{-itx}C_X(t)}{t}\right)\mathrm{d}t.$$

where $\Im(z)$ denotes the imaginary part of z.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", lrt_x0_s0(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

`dist_lrt_x0_s0.sf`(x)

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following the distribution of Box's LRTs.

The sf can be calculated (in principle in arbitrary precision) by numerical inversion of the characteristic function, using the algorithm by Gil-Pelaez. Gil-Pelaez derived the following inversion formula which requires integration of a real-valued function, only. In particular,

$$\mathrm{sf}_X(x) = \frac{1}{2} + \frac{1}{\pi}\int_0^\infty \Im\left(\frac{e^{-itx}C_X(t)}{t}\right)\mathrm{d}t.$$

where $\Im(z)$ denotes the imaginary part of z.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", lrt_x0_s0(mu, sigma).pdf(x))
sf: 6.35635234625645256156156145613 56E-20
```

`dist_lrt_x0_s0.qtf`(q)

Returns $\mathrm{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following the distribution of Box's LRTs:

There is no known closed form for the quantile function $\mathrm{cdf}_X^{-1}(q)$: It is computed with Newton iterations where the starting values are from a central chi-square approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", lrt_x0_s0(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

`dist_lrt_x0_s0.isf`(q)

Returns $\mathrm{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following the distribution of Box's LRTs:

$$\mathrm{isf}_X(q) = \mathrm{qtf}_X(1-q) = \mathrm{cdf}_X^{-1}(1-q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", lrt_x0_s0(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

`dist_lrt_x0_s0.c_x`(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following the distribution of Box's LRTs:

The characteristic function of $M = -2\log(\lambda_2)$ has the form (Nagarsenker 1974, equation 2.3)

$$C_X(t) = \frac{(2e/N)^{-it\cdot pN}}{(1-2it)^{-\frac{1}{2}pN(1-2it)}}\prod_{j=1}^{p}\frac{\Gamma\left[\frac{1}{2}N(1-2it)-j/2\right]}{\Gamma\left[\frac{1}{2}(N-j)\right]}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", lrt_x0_s0(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

`dist_lrt_x0_s0.m_x(t)`

Returns $M_X(t)$, the moment generating function of a random variable X, following the distribution of Box's LRTs:

$$M_X(t) = \frac{(2e/N)^{-t \cdot pN}}{(1-2t)^{-\frac{1}{2}pN(1-2t)}} \prod_{j=1}^{p} \frac{\Gamma\left[\frac{1}{2}N(1-2t) - j/2\right]}{\Gamma\left[\frac{1}{2}(N-j)\right]}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", lrt_x0_s0(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

`dist_lrt_x0_s0.k_x(s, k=0)`

Returns $K_X(s)$, the cumulant generating function, and its j^{th} derivatives, $K_X^{(j)}(s), j = 1 \ldots k$, of a random variable X, following the distribution of Box's LRTs:

$$M_X(t) = \log(M_X(t))$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", lrt_x0_s0(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

`dist_lrt_x0_s0.moments(k)`

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following the distribution of Box's LRTs. The moments are calculated from the cumulants.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", lrt_x0_s0(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

`dist_lrt_x0_s0.cumulants(k)`

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following the distribution of Box's LRTs

The cumulants κ_j of $M = -2\log(W)$ are given by

$$\kappa_1 = tbd$$

$$\kappa_j = tbd$$

where $\psi(\cdot)$ is the digamma function, and its derivatives $\psi^{(j)}(\cdot)$ are polygamma functions.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", lrt_x0_s0(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

Additional information

We have for the Box-Davis expansion (see Davis 1971, equations 23-24):

$$f = \tfrac{1}{2}p(p+3); \quad \rho = 1 - \frac{2p^2+9p+11}{6N(p+3)}$$

$$\omega_r = \frac{2(-1)^r}{r(r+1)(r+2)\rho^r}\sum_{s=1}^{r+1}\binom{r+2}{s+1}(1-\rho-N^{-1})^{r+1-s}\frac{\delta_s + p(s+1)/2^{s+1}}{(\frac{1}{2}N)^{s-1}},$$

where δ is defined in Box (1949). For tables see Nagarsenker 1974

Approximations

`ctx.`**`lrt_x0_vc0_bd`**`(`q, f, *rho*, *omega*`)`

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

We have for the Box-Davis expansion (see Davis 1971, equations 23-24):

$$f = \tfrac{1}{2}p(p+3); \quad \rho = 1 - \frac{2p^2+9p+11}{6N(p+3)}; \quad \delta_{s,p} = -\frac{s+1}{2}\sum_{j=0}^{p-1}B_s(-j/2)$$

$$\omega_r = \frac{2(-1)^r}{r(r+1)(r+2)\rho^r}\sum_{s=1}^{r+1}\binom{r+2}{s+1}(1-\rho-N^{-1})^{r+1-s}\frac{\delta_{s,p} + p(s+1)/2^{s+1}}{(\frac{1}{2}N)^{s-1}},$$

where $B_s(\cdot)$ is the Bernoulli polynomial of degree s. . For tables see Nagarsenker 1974

`ctx.`**`lrt_x0_vc0_bd_inv`**`(`q, f, *rho*, *omega*`)`

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Calculates the Box-Davis approximation to the qtf and isf.

4.11.14 Central distribution of Roy's largest root

class ctx.**dist_roy**(p, m, n)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following the distribution of Roy's largest root, with parameters p, m and n, and the support interval $(0, 1)$. See also Anderson [9], Muirhead [416], Butler [165], Chiani [177], Chiani [178].

dist_roy.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following the distribution of Roy's largest root:

$$\mathrm{pdf}_X(x) = \tfrac{1}{2} C \sqrt{|A(\theta_1)|}\ \mathrm{tr}\left(A(t)^{-1} B\right).$$

A and C are defined as in *roy_pdf_cdf_sf()*.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", roy_largest_root(mu, sigma).pdf(x))
6.356352346256452561561561561456 1356E-20
```

dist_roy.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following the distribution of Roy's largest root:

$$\mathrm{cdf}_X(x) = C \sqrt{|A(\theta_1)|}.$$

A and C are defined as in *roy_pdf_cdf_sf()*.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", roy_largest_root(mu, sigma).pdf(x))
6.356352346256452561561561561456 1356E-20
```

dist_roy.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following the distribution of Roy's largest root:

$$\mathrm{sf}_X(x) = 1 - C \sqrt{|A(\theta_1)|}.$$

A and C are defined as in *roy_pdf_cdf_sf()*.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", roy_largest_root(mu, sigma).pdf(x))
sf: 6.356352346256452561561561561456 1356E-20
```

dist_roy.**qtf**(q)

Returns $\mathrm{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following the distribution of Roy's largest root:

There is no known closed form for the quantile function $\mathrm{cdf}_X^{-1}(q)$: It is computed with Newton iterations where the starting values are from a central chi-square approximation by Chiani.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", roy_largest_root(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_roy.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following the distribution of Roy's largest root:

There is no known closed form for the quantile function $\text{isf}_X^{-1}(q)$: It is computed with Newton iterations where the starting values are from a central chi-square approximation by Chiani.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", roy_largest_root(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_roy.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following the distribution of Roy's largest root:

$$C_X(t) = \int_0^\infty e^{itx} \text{pdf}_X(x) \mathrm{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", roy_largest_root(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_roy.**m_x**(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following the distribution of Roy's largest root:

$$M_X(t) = \int_0^\infty e^{tx} \text{pdf}_X(x) \mathrm{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", roy_largest_root(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_roy.**k_x**(s, *k=0*)

Returns $K_X(s)$, the cumulant generating function, and its j^{th} derivatives, $K_X^{(j)}(s), j = 1 \ldots k$, of a random variable X, following the distribution of Roy's largest root:

$$K_X(t) = \log\left(M_X(t)\right)$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", roy_largest_root(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

dist_roy.**moments**(k)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following the distribution of Roy's largest root:

$$\mu'_X(r) = \int_0^\infty x^r \mathrm{pdf}_X(x)\mathrm{d}x$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", roy_largest_root(mu, sigma).moments(k))
6.356352346256452561561561561456 1356E+00
```

dist_roy.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following the distribution of Roy's largest root. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", roy_largest_root(mu, sigma).cumulants(k))
6.356352346256452561561561561456 1356E+00
```

4.11.15 Central distribution of Pillai's V

class ctx.**dist_pillai_v**(p, m, n)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The Pillai V distribution is a continuous probability distribution with $p \geq 1$ predictor variables, error degress of freedom $m \geq 1$ and $n \geq 1$, and the support interval $(0, 1)$. See also Anderson [9], Muirhead [416], Butler [165], Davis [202], Davis [203], Davis [204].

dist_pillai_v.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following the distribution of Pillai's V:

The pdf is computed by numerical inversion of the characteristic function or cumulant generating function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", pillai_v(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_pillai_v.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following the distribution of Pillai's V:

The cdf is computed by numerical inversion of the characteristic function or cumulant generating function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", pillai_v(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_pillai_v.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function (sf) of a random variable X, following the distribution of Pillai's V:

$$\text{sf}_X(x) = 1 - \text{cdf}_X(x) = \int_x^\infty \text{pdf}_X(x)\text{d}t.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", pillai_v(mu, sigma).pdf(x))
sf: 6.35635234625645256156156145613 56E-20
```

dist_pillai_v.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following the distribution of Pillai's V:

There is no known closed form for the quantile function $\text{cdf}_X^{-1}(q)$: It is computed with Newton iterations where the starting values are from a central chi-square approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", pillai_v(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_pillai_v.**isf**(*q*)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following the distribution of Pillai's V:

$$\text{isf}_X(q) = \text{qtf}_X(1-q) = \text{cdf}_X^{-1}(1-q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", pillai_v(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_pillai_v.**c_x**(*t*)

Returns $C_X(t)$, the characteristic function of a random variable X, following the distribution of Pillai's V:

```

```

TO BE CALCULATED VIA RAW MOMENTS

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", pillai_v(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_pillai_v.**m_x**(*t*)

Returns $M_X(t)$, the moment generating function of a random variable X, following the distribution of Pillai's V:

```
TO BE CALCULATED VIA RAW MOMENTS
```

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", pillai_v(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_pillai_v.**k_x**(*s*, *k=0*)

Returns $K_X(s)$, the cumulant generating function, and its j^{th} derivatives, $K_X^{(j)}(s), j = 1 \ldots k$, of a random variable X, following the distribution of Pillai's V:

```

```

TO BE CALCULATED VIA RAW MOMENTS

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", pillai_v(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

dist_pillai_v.**moments**(*k*)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following the distribution of Pillai's V:

```
TO BE CALCULATED AS IN DAVIS
```

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", pillai_v(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_pillai_v.**cumulants**(*k*)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following the distribution of Pillai's V. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", pillai_v(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

Approximations

ctx.**pillai_v_ecf**(*x*, *p*, *m*, *n*, *results='cdf'*)

where ctx is ipm, dec, mpm, or gmp.

Calculates the Edgeworth approximation to the pdf, cdf and sf.

ctx.**pillai_v_ecf_inv**(*q*, *p*, *m*, *n*, *results='qtf'*)

where ctx is ipm, dec, mpm, or gmp.

Calculates the Cornish-Fisher approximation to the qtf and isf.

ctx.**pillai_v_bd**(*x*, *f*, *rho*, *omega*)

where ctx is ipm, dec, mpm, or gmp.

Calculates the Box-Davis approximation to the pdf, cdf and sf.

For Pillai's V distribution, the parameters of the Box-Davis expansion are given by

Let $s = 1, \quad k = m + 1, \quad a = 2k + n_1$. Then

$$f = pq; \quad \rho = 1.$$

$$\omega_1 = mn_1k/(2n_2), \quad 2r\omega_r = 2(r-1)\omega_r - 1 - s(1-k/n_2)c_{1,r}, \quad r = 2, 3, \ldots$$

$$c_{0,0} = 1; \quad c_{0,r} = c_{r,0} = 0; \quad (r = 1, 2, \ldots); \quad c_{r,1} = 0 (r = 2, 3, \ldots)$$

$$\begin{aligned} jc_{j,r} &= [(m-j+1)(n_1-j+1)]c_{j-1,r-1} + [(j(2m+n_1-2j+2)+2(r-1))/n2]c_{j,r-1} \\ &+ [(j+1)/n_2 - (j+1)(m-j+1)/n_2^2]c_{j+1,r-1} - [(mn_1+2(r-2)/n_2]c_{j,r-2} \\ &+ (2/n_2)\sum_{i=1}^{r-2} i\omega_i(c_{j,r-i-1} - c_{j,r-i-2}) \end{aligned}$$

ctx.**pillai_v_bd_inv**(*q*, *f*, *rho*, *omega*)

where ctx is ipm, dec, mpm, or gmp.

Calculates the Box-Davis approximation to the qtf and isf.

4.11.16 Central distribution of Hotelling's T^2

class ctx.**dist_hotelling_t2**(p, m, n)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The Hotelling T^2 distribution is a continuous probability distribution with $p \geq 1$ predictor variables, error degress of freedom $m \geq 1$ and $n \geq 1$, and the support interval $(0, 1)$. See also Anderson [9], Muirhead [416], Butler [165], Davis [202], Davis [203], Davis [204].

dist_hotelling_t2.**pdf**(x)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following the distribution of Hotelling's T^2:

The pdf is computed by numerical inversion of the characteristic function or cumulant generating function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", hotelling_t2(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_hotelling_t2.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following the distribution of Hotelling's T^2:

The cdf is computed by numerical inversion of the characteristic function or cumulant generating function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", hotelling_t2(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_hotelling_t2.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function (sf) of a random variable X, following the distribution of Hotelling's T^2:

$$\text{sf}_X(x) = 1 - \text{cdf}_X(x) = \int_x^\infty \text{pdf}_X(x)\text{d}t.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", hotelling_t2(mu, sigma).pdf(x))
sf: 6.35635234625645256156156145613 56E-20
```

dist_hotelling_t2.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following the distribution of Hotelling's T^2:

There is no known closed form for the quantile function $\text{cdf}_X^{-1}(q)$: It is computed with Newton iterations where the starting values are from a central chi-square approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", hotelling_t2(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_hotelling_t2.**isf**(*q*)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following the distribution of Hotelling's T^2:

$$\text{isf}_X(q) = \text{qtf}_X(1-q) = \text{cdf}_X^{-1}(1-q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", hotelling_t2(mu, sigma).isf(q))
6.356352346256452561561561456135 6E+00
```

dist_hotelling_t2.**c_x**(*t*)

Returns $C_X(t)$, the characteristic function of a random variable X, following the distribution of Hotelling's T^2:

```
TO BE CALCULATED VIA RAW MOMENTS
```

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", hotelling_t2(mu, sigma).c_x(t))
6.356352346256452561561561456135 6E+00
```

dist_hotelling_t2.**m_x**(*t*)

Does not exist

dist_hotelling_t2.**k_x**(*s*, *k=0*)

Does not exist

dist_hotelling_t2.**moments**(*k*)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following the distribution of Hotelling's T^2:

Returns the first k moments of the Lawley-Hotelling generalized T_0^2 statistic. The moments of Hotelling's T_0^2 exist up to the j^{th}, where j is the largest integer such that $j < \frac{1}{2}(n_2 - m + 1)$. The raw moments are determined as follows (see Davis [202]):

$$E(T^r) = (-1)^r r!(n_1+n_2)! \sum_{k=0}^{m} \frac{l_{kr}}{(m+n_2-k)!}, \quad \text{where}$$

$$\boldsymbol{l_i} = (l_{0i}, \ldots, l_{mi})', \quad a_i = \tfrac{1}{2}(m-i)(n_2-i),$$

$$\boldsymbol{l_0} = \frac{n_2!}{(n_1+n_2)!}(0, \ldots, 0, 1)',$$

$$\boldsymbol{l_r} = \text{diag}\left(\frac{1}{(r-a_0)}, \ldots, \frac{1}{(r-a_m)}\right) \sum_{s=0}^{r-1} \boldsymbol{l_s},$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", hotelling_t2(mu, sigma).moments(k))
6.356352346256452561561561456135 6E+00
```

dist_hotelling_t2.**cumulants**(*k*)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following the distribution of Hotelling's T^2. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", hotelling_t2(mu, sigma).cumulants(k))
6.356352346256452561561561561456135 6E+00
```

Approximations

ctx.**hotelling_t2_ecf**(*x*, *p*, *m*, *n*, *results='cdf'*)

where ctx is ipm, dec, mpm, or gmp.

Calculates the Edgeworth approximation to the pdf, cdf and sf.

ctx.**hotelling_t2_ecf_inv**(*q*, *p*, *m*, *n*, *results='qtf'*)

where ctx is ipm, dec, mpm, or gmp.

Calculates the Cornish-Fisher approximation to the qtf and isf.

ctx.**hotelling_t2_bd**(*x*, *f*, *rho*, *omega*)

where ctx is ipm, dec, mpm, or gmp.

Calculates the Box-Davis approximation to the pdf, cdf and sf.

For Hotelling's T^2 distribution, the parameters of the Box-Davis expansion are given vy

The coefficients for the Box-Davis expansion are calculated as follows:

Let $s = -1, \quad k = -n_1, \quad a = 2n_1 + m + 1$. Then

$$f = pq; \quad \rho = 1.$$

$$\omega_1 = mn_1k/(2n_2), \quad 2r\omega_r = 2(r-1)\omega_r - 1 - s(1-k/n_2)c_{1,r}, \quad r = 2, 3, \ldots$$

$$c_{0,0} = 1; \quad c_{0,r} = c_{r,0} = 0; \quad (r = 1, 2, \ldots); \quad c_{r,1} = 0 (r = 2, 3, \ldots)$$

$$\begin{aligned} jc_{j,r} &= [(m-j+1)(n_1-j+1)]c_{j-1,r-1} + [(j(2m+n_1-2j+2)+2(r-1))/n2]c_{j,r-1} \\ &+ [(j+1)/n_2 - (j+1)(m-j+1)/n_2^2]c_{j+1,r-1} - [(mn_1+2(r-2)/n_2]c_{j,r-2} \\ &+ (2/n_2)\sum_{i=1}^{r-2} i\omega_i(c_{j,r-i-1} - c_{j,r-i-2}) \end{aligned}$$

ctx.**hotelling_t2_bd_inv**(*q*, *f*, *rho*, *omega*)

where ctx is ipm, dec, mpm, or gmp.

Calculates the Box-Davis approximation to the qtf and isf.

4.11.17 Noncentral Distribution of Wilks' Λ: MANOVA

class ctx.**dist_wilks_lambda_glm**(*p*, *m*, *n*, *omega*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The noncentral Wilks' Λ distribution under the GLM alternative, with $p \geq 1$ predictor variables, error degress of freedom $m \geq 1$ and $n \geq 1$, noncentrality parameter Ω with diagonal entries $\omega_{jj} \in (0, \infty)$ is a continuous probability distribution with the support interval $(0, 1)$. See also Anderson [9], Muirhead [416], Butler [165], Butler and Wood [167], Butler and Wood [168], Fujikoshi [336], Fujikoshi [337], Fujikoshi [338], Lee [403], Lee [404], Walster and Tretter [787], Witkovský [1483].

dist_wilks_lambda_glm.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following the noncentral distribution of Wilks' Lambda (GLM): The pdf is computed by numerical inversion of the characteristic function or cumulant generating function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", wilks_lambda_glm(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_wilks_lambda_glm.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following the noncentral distribution of Wilks' Lambda (GLM): The cdf is computed by numerical inversion of the characteristic function or cumulant generating function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", wilks_lambda_glm(mu, sigma).pdf(x))
6.3563523462564525615615615614561356E-20
```

dist_wilks_lambda_glm.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following the noncentral distribution of Wilks' Lambda (GLM):

$$\mathrm{sf}_X(x) = 1 - \mathrm{cdf}_X(x) = \int_x^\infty \mathrm{pdf}_X(x)\mathrm{d}t.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", wilks_lambda_glm(mu, sigma).pdf(x))
sf: 6.3563523462564525615615615614561356E-20
```

dist_wilks_lambda_glm.**qtf**(q)

Returns $\mathrm{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following the noncentral distribution of Wilks' Lambda (GLM):

There is no known closed form for the quantile function $\mathrm{cdf}_X^{-1}(q)$: It is computed with Newton iterations where the starting values are from a central chi-square approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", wilks_lambda_glm(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_wilks_lambda_glm.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following the noncentral distribution of Wilks' Lambda (GLM):

$$\text{isf}_X(q) = \text{qtf}_X(1-q) = \text{cdf}_X^{-1}(1-q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", wilks_lambda_glm(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_wilks_lambda_glm.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following the noncentral distribution of Wilks' Lambda (GLM):

$$C_X(t) = \frac{\Gamma_p(n/2-it)\Gamma_p((n+m)/2)}{\Gamma_p(n/2)\Gamma_p((n+m)/2-it)} {}_1F_1\left(-it; \frac{n+m}{2} + -it; -\frac{1}{2}\Omega\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", wilks_lambda_glm(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_wilks_lambda_glm.**m_x**(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following the noncentral distribution of Wilks' Lambda (GLM):

$$M_X(t) = \left[\frac{\Gamma_p(n/2+s)\Gamma_p((n+m)/2)}{\Gamma_p(n/2)\Gamma_p((n+m)/2+s)} {}_1F_1\left(s, \tfrac{1}{2}(n+m)+s, -\tfrac{1}{2}\Omega\right)\right].$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", wilks_lambda_glm(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_wilks_lambda_glm.**k_x**(s, *k=0*)

Returns $K_X(s)$, the cumulant generating function, and its j^{th} derivatives, $K_X^{(j)}(s), j = 1 \ldots k$, of a random variable X, following the noncentral distribution of Wilks' Lambda (GLM):

$$K_X(s) = \log\left[\frac{\Gamma_p(n/2+s)\Gamma_p((n+m)/2)}{\Gamma_p(n/2)\Gamma_p((n+m)/2+s)} {}_1F_1\left(s, \tfrac{1}{2}(n+m)+s, -\tfrac{1}{2}\Omega\right)\right].$$

$$K'(s) = \sum_{i=1}^{p} \left[\psi\left(\tfrac{1}{2}n + s - \tfrac{1}{2}(i-1)\right) - \psi\left(\tfrac{1}{2}(n+m) + s - \tfrac{1}{2}(i-1)\right)\right] + \frac{\partial}{\partial s} \log\left[{}_1F_1\left(s, \tfrac{1}{2}(n+m) + s, -\tfrac{1}{2}\Omega\right)\right],$$

where $\Gamma_p(\cdot)$ is the multivariate gamma function , $\psi(\cdot)$ is the digamma function , and ${}_1F_1(\cdot, \cdot, X)$ is the confluent hypergeometric function of matrix argument .

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", wilks_lambda_glm(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

`dist_wilks_lambda_glm.`**`moments`**`(`*k*`)`

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following the noncentral distribution of Wilks' Lambda (GLM):

$$\mu'_X(r) = \frac{\Gamma_p(n/2 + s)\Gamma_p((n+m)/2)}{\Gamma_p(n/2)\Gamma_p((n+m)/2 + s)} {}_1F_1\left(s; \frac{n+m}{2} + s; -\frac{1}{2}\Omega\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", wilks_lambda_glm(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

`dist_wilks_lambda_glm.`**`cumulants`**`(`*k*`)`

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following the noncentral distribution of Wilks' Lambda (GLM) The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", wilks_lambda_glm(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

Approximations

`ctx.`**`wilks_lambda_glm_gp`**`(`*x*, *p*, *m*, *n*, *Omega*, *cdf=True*, *method='default'*`)`

where `ctx` is `dec`, `mpm`, `fpm`, `gmp` or `apm`.

Calculates the pdf, cdf and sf from the characteristic function using the procedure of Gil-Pelaez (see *gil_pelaez_pdf()* and *gil_pelaez_cdf()*).

This uses $U = \log 2W$.

`ctx.`**`wilks_lambda_glm_spa`**`(`*x*, *n*, *results='c'*`)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Calculates the Luggannini-Rice saddlepoint approximation of the pdf, cdf and sf.

This uses $2 \log W$ of non-central Wilks W

ctx.**wilks_lambda_glm_inv**(*x*, *n*, *results='qtf'*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

Calculates the inverse Jensen saddlepoint approximation of the qtf and isf.

This uses $2 \log W$ of non-central Wilks W

4.11.18 Noncentral Distribution of Wilks' Λ: Canonical Correlation

class ctx.**dist_wilks_lambda_corr**(*p1*, *p2*, *n*, *Rho2*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The noncentral Wilks' Λ distribution under the independence alternative, with $p_1 \geq 1$ and $p_2 \geq 1$ groups of variables, error degress of freedom $n \geq 1$, noncentrality parameter P^2 with diagonal entries $\rho_{jj}^2 \in (0, 1)$ is a continuous probability distribution with the support interval $(0, 1)$. See also Anderson [9], Muirhead [416], Butler [165], Butler and Wood [167], Butler and Wood [168], Fujikoshi [336], Fujikoshi [337], Lee [403], Lee [404], Walster and Tretter [787], Witkovský [1476].

dist_wilks_lambda_corr.**pdf**(*x*, *kwargs*)

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following the noncentral distribution of Wilks' Lambda (CORR): The pdf is computed by numerical inversion of the characteristic function or cumulant generating function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", wilks_lambda_corr(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_wilks_lambda_corr.**cdf**(*x*, *kwargs*)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following the noncentral distribution of Wilks' Lambda (CORR): The cdf is computed by numerical inversion of the characteristic function or cumulant generating function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", wilks_lambda_corr(mu, sigma).pdf(x))
6.35635234625645256156156145613 56E-20
```

dist_wilks_lambda_corr.**sf**(*x*)

Returns $\text{sf}_X(x)$, the survival function (sf) of a random variable X, following the noncentral distribution of Wilks' Lambda (CORR):

$$\text{sf}_X(x) = 1 - \text{cdf}_X(x) = \int_x^\infty \text{pdf}_X(x)\text{d}t.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", wilks_lambda_corr(mu, sigma).pdf(x))
sf: 6.35635234625645256156156145613 56E-20
```

dist_wilks_lambda_corr.**qtf**(*q*)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following the noncentral distribution of Wilks' Lambda (CORR):

There is no known closed form for the quantile function $\text{cdf}_X^{-1}(q)$: It is computed with Newton iterations where the starting values are from a central chi-square approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", wilks_lambda_corr(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_wilks_lambda_corr.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following the noncentral distribution of Wilks' Lambda (CORR):

$$\text{isf}_X(q) = \text{qtf}_X(1-q) = \text{cdf}_X^{-1}(1-q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", wilks_lambda_corr(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_wilks_lambda_corr.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following the noncentral distribution of Wilks' Lambda (CORR):

$$C_X(t) = \frac{\Gamma_{p_1}(n/2)\Gamma_{p_1}((n-p_2)/2 - it)}{\Gamma_{p_1}(n/2 - it)\Gamma_{p_1}((n-p_2)/2)} \times |I_{p_1} - P^2|^{n/2}{}_2F_1\left(\frac{n}{2}, \frac{n}{2}; \frac{n}{2} - it; P^2\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", wilks_lambda_corr(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_wilks_lambda_corr.**m_x**(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following the noncentral distribution of Wilks' Lambda (CORR):

$$M_X(t) = \left[\frac{\Gamma_{p_1}(n/2)\Gamma_{p_1}((n-p_2)/2 + s)}{\Gamma_{p_1}(n/2 + s)\Gamma_{p_1}((n-p_2)/2)} \times |I_{p_1} - P^2|^{n/2}{}_2F_1\left(\frac{n}{2}, \frac{n}{2}; \frac{n}{2} + s; P^2\right)\right].$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", wilks_lambda_corr(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_wilks_lambda_corr.**k_x**(s, *k=0*)

Returns $K_X(s)$, the cumulant generating function, and its j^{th} derivatives, $K_X^{(j)}(s), j = 1 \ldots k$, of a random variable X, following the noncentral distribution of Wilks' Lambda (CORR):

$$K_X(s) = \log\left[\frac{\Gamma_{p_1}(n/2)\Gamma_{p_1}((n-p_2)/2 + s)}{\Gamma_{p_1}(n/2 + s)\Gamma_{p_1}((n-p_2)/2)} \times |I_{p_1} - P^2|^{n/2}{}_2F_1\left(\frac{n}{2}, \frac{n}{2}; \frac{n}{2} + s; P^2\right)\right].$$

$$K'(s) = \sum_{i=1}^{p} \left[\psi\left(\tfrac{1}{2}n + s - \tfrac{1}{2}(i-1)\right) - \psi\left(\tfrac{1}{2}(n+m) + s - \tfrac{1}{2}(i-1)\right)\right] + \frac{\partial}{\partial s} \log\left[|I_{p_1} - P^2|^{n/2}{}_2F_1\left(\frac{n}{2}, \frac{n}{2}; \frac{n}{2} + s; P^2\right)\right],$$

where $\Gamma_p(\cdot)$ is the multivariate gamma function , $\psi(\cdot)$ is the digamma function , and ${}_2F_1(\cdot, \cdot, X)$ is the Gauss hypergeometric function of matrix argument . The saddlepoint equation needs to be evaluated numerically. Also, the computation of $K''(s)$ is performed using a numerical derivative of $K'(s)$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", wilks_lambda_corr(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

`dist_wilks_lambda_corr.`**`moments`**`(`*k*`)`

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following the noncentral distribution of Wilks' Lambda (CORR):

$$\mu'_X(r) = \frac{\Gamma_{p_1}(n/2)\Gamma_{p_1}((n-p_2)/2+s)}{\Gamma_{p_1}(n/2+s)\Gamma_{p_1}((n-p_2)/2)} \times |I_{p_1} - P^2|^{n/2}{}_2F_1\left(\frac{n}{2}, \frac{n}{2}; \frac{n}{2} + s; P^2\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", wilks_lambda_corr(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

`dist_wilks_lambda_corr.`**`cumulants`**`(`*k*`)`

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following the noncentral distribution of Wilks' Lambda (CORR) The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", wilks_lambda_corr(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

Approximations

`ctx.`**`wilks_lambda_ind_gp`**`(`*x*, *p1*, *p2*, *n*, *Rho2*, *method='default'*`)`

where `ctx` is `dec`, `mpm`, `fpm`, `gmp` or `apm`.

Calculates the pdf, cdf and sf from the characteristic function using the procedure of Gil-Pelaez (see *gil_pelaez_pdf()* and *gil_pelaez_cdf()*).

This uses $U = \log 2W$.

`ctx.`**`wilks_lambda_ind_spa`**`(`*x*, *n*, *results='c'*`)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Calculates the Luggannini-Rice saddlepoint approximation of the pdf, cdf and sf.

This uses $2 \log W$ of non-central Wilks W

ctx.**wilks_lambda_ind_spa_inv**(*x*, *n*, *results='qtf'*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

Calculates the inverse Jensen saddlepoint approximation of the qtf and isf.

This uses $2 \log W$ of non-central Wilks W

4.12 Miscellaneous continuous distributions

4.12.1 Boost: Kolmogorov-Smirnov distribution (limiting form)

Returns the pdf, cdf, qtf or boost class of a random variable X, following the limiting form of the Kolmogorov distribution with parameters $n > 0$ and the support interval $[0, \infty)$.

!!! The following references need to be updated: !!!

See also Wikipedia [1141], MathWorld [791], BoostMath [51], Ehrhardt [295] (3.9.2).

`math53.`**`kolmogorov_smirnov_pdf`**(n, x)

Returns the pdf of the limiting form of the Kolmogorov distribution, for $x \in [0, \infty)$.

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("BetaPdf(x, a, b): ", BetaPdf(x, a, b))
>>> print ("dist_beta(a, b).pdf(x): ", dist_beta(a, b).pdf(x))
6.356352346256452561561561561456 1356E+00
```

`math53.`**`kolmogorov_smirnov_cdf`**(n, x)

Returns $\mathrm{KF}(x) = 1 - 2\sum_{k=1}^{\infty}(-1)^k e^{-2k^2x^2}$, the CDF of the limiting form of the Kolmogorov distribution, for $x \in [0, \infty)$.

See also Ehrhardt [295] (3.9.14).

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("BetaCdf(x, a, b): ", BetaCdf(x, a, b))
>>> print ("dist_beta(a, b).cdf(x): ", dist_beta(a, b).cdf(x))
6.356352346256452561561561561456 1356E+00
```

`math53.`**`kolmogorov_smirnov_qtf`**(n, q)

Returns $\mathrm{KF}^{-1}(x)$, the functional inverse of the CDF of the Kolmogorov distribution (limiting form), ie $\mathrm{KF}(\mathrm{KF}^{-1}(x)) = x$.

See also Ehrhardt [295] (3.9.14).

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("BetaQtf(q, a, b): ", BetaQtf(q, a, b))
>>> print ("dist_beta(a, b).qtf(q): ", dist_beta(a, b).qtf(q))
6.356352346256452561561561561456 1356E+00
```

`CtxBoost.`**`dist_kolmogorov_smirnov`**(a, b)

Returns an `dist_kolmogorov_smirnov` object, which gives access to the functions descibed below:

```
>>> from xlcalcnet import SReal, FReal, ereal, QReal, CReal, OReal
>>> a = 0; b = 1;
>>> Ctx = SReal
>>> dist_beta = Ctx.dist_beta(a, b)
>>> print ("Dist.qtf(q=0.5): ", Dist.qtf(q=0.5))
6.35635234625645256156156145613 56E+00
```

dist_kolmogorov_smirnov.**pdf**(x)

Returns pdf(x), the value of the probability density function of the Kolmogorov distribution (limiting form). See *Ctx.kolmogorov_smirnov_pdf* for formulas and examples.

dist_kolmogorov_smirnov.**cdf**(x)

Returns cdf(x), the value of the cumulative distribution function of the Kolmogorov distribution (limiting form). See *Ctx.kolmogorov_smirnov_cdf* for formulas and examples.

dist_kolmogorov_smirnov.**qtf**(q)

Returns qtf(q), the value of the quantile function of the Kolmogorov distribution (limiting form). See *Ctx.kolmogorov_smirnov_qtf* for formulas and examples.

dist_kolmogorov_smirnov.**sf**(x)

Returns sf(x), the value of the survival function (*Sf*) of the Kolmogorov distribution (limiting form).

```
>>> # continued from above
>>> print ("Dist.sf(x=0.5): ", Dist.qtf(x=0.5))
6.35635234625645256156156145613 56E+00
```

dist_kolmogorov_smirnov.**isf**(q)

Returns isf(q), the value of the inverse survival function (*Isf*) of the Kolmogorov distribution (limiting form).

```
>>> # continued from above
>>> print ("Dist.isf(x=0.5): ", Dist.isf(x=0.5))
6.35635234625645256156156145613 56E+00
```

dist_kolmogorov_smirnov.**hf**(x)

Returns hazard(x), the value of the hazard function (*Hf*) of the Kolmogorov distribution (limiting form).

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_kolmogorov_smirnov.**chf**(x)

Returns chf(x), the value of the cumulative hazard function (*Chf*) of the Kolmogorov distribution (limiting form).

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_kolmogorov_smirnov.**mode**()

Returns the *mode* of the Kolmogorov distribution (limiting form). Since there is not one unique mode, Nan is returned.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561456135 6E+00
```

dist_kolmogorov_smirnov.**median**()

Returns the *median* of the Kolmogorov distribution (limiting form). Calculated as $\frac{1}{2}(a+b)$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561456135 6E+00
```

dist_kolmogorov_smirnov.**mean**()

Returns the *mean* (expected value) of the Kolmogorov distribution (limiting form). Calculated as $\frac{1}{2}(a+b)$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561456135 6E+00
```

dist_kolmogorov_smirnov.**variance**()

Returns the *variance* of the Kolmogorov distribution (limiting form). Calculated as $\frac{1}{8}(b-a)^2$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561456135 6E+00
```

dist_kolmogorov_smirnov.**stdev**()

Returns the *standard deviation* of the Kolmogorov distribution (limiting form). Calculated as $\sqrt{\frac{1}{8}(b-a)^2}$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561456135 6E+00
```

dist_kolmogorov_smirnov.**skewness**()

Returns the *skewness* of the Kolmogorov distribution (limiting form). Calculated as 0.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
```

(continues on next page)

(continued from previous page)

```
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

dist_kolmogorov_smirnov.**kurtosis**()

Returns the 'proper' *kurtosis* (normalized fourth moment) of the Kolmogorov distribution (limiting form). Calculated as $3/2$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

dist_kolmogorov_smirnov.**kurtosis_excess**()

Returns the *kurtosis excess* of the Kolmogorov distribution (limiting form). Calculated as $-3/2$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

dist_kolmogorov_smirnov.**support_lower_endpoint**()

Returns the *support* of the Kolmogorov distribution (limiting form) as a tuple (left, right).

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

dist_kolmogorov_smirnov.**support_upper_endpoint**()

Returns the *support* of the Kolmogorov distribution (limiting form) as a tuple (left, right).

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

dist_kolmogorov_smirnov.**range_lower_endpoint**()

Returns the valid *range* of the Kolmogorov distribution (limiting form) as a tuple (left, right).

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

dist_kolmogorov_smirnov.**range_upper_endpoint**()

Returns the valid *range* of the Kolmogorov distribution (limiting form) as a tuple (left, right).

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

4.12.2 Boost: Landau Distribution

The Landau distribution is a stable distribution (see Wikipedia [1223]) with the shape parameters $\alpha = 1, \beta = 1$. For simplicity of numerical computation, this paper evaluates as follows assuming location parameter $\mu = 0$, scale parameter $c = 1/\pi/2$, i.e. $p(x) = p(x; \alpha = 1, \beta = 1, \mu = 0, c = \pi/2)$. For other choices of the location parameter μ and scale parameter c there is the relationship

$$p(x_1; \mu_1, c_1) = p\left(x := \frac{x_1 - \mu_1}{c_1} - \frac{2}{\pi}\log(c); \mu := 0, c := 1\right) \cdot \frac{1}{c_1}.$$

The support interval is $(-\infty, +\infty)$.

!!! The following references need to be updated: !!!

See also: https://www.boost.org/doc/libs/1_89_0/libs/math/doc/html/math_toolkit/dist_ref/dists/landau_dist.html

See also: https://en.wikipedia.org/wiki/Landau_distribution

`math53.landau_pdf(mu, c, x)`

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following an Landau distribution, with $\mu \in \mathbb{R}$, $c > 0$:

$$\mathrm{pdf}_X(x) = \frac{1}{\pi c}\int_0^\infty e^{-t}\cos\left(t\left(\frac{x-\mu}{c}\right) + \frac{2t}{\pi}\log\left(\frac{t}{c}\right)\right)\mathrm{d}t.$$

For $\mu = 0, c = \pi/2$ this simplifies to:

$$\mathrm{pdf}_X(x) = \frac{1}{\pi}\int_0^\infty \frac{\exp(-xt)\sin(\pi t)}{t^t}\mathrm{d}t.$$

`math53.landau_cdf(mu, c, x)`

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following an Landau distribution.

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("StudentTCdf(x, a, b): ", StudentTCdf(x, a, b))
>>> print ("dist_student_t(a, b).cdf(x): ", dist_student_t(a, b).cdf(x))
6.35635234625645256156156145613356E+00
```

`math53.landau_qtf(mu, c, q)`

where `Ctx` is `Math53` or `CtxBoost`.

Returns $\mathrm{qtf}(q)$, the value of the quantile function (*Qtf*) of the Landau distribution.

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("StudentTQtf(q, a, b): ", StudentTQtf(q, a, b))
>>> print ("dist_student_t(a, b).qtf(q): ", dist_student_t(a, b).qtf(q))
6.35635234625645256156156145613356E+00
```

class ctx.**dist_landau**(*n1*, *n2*, *lambda*, ***kwargs*)

In probability theory, the Landau distribution is a probability distribution named after Lev Landau. Because of the distribution's "fat" tail, the moments of the distribution, like mean or variance, are undefined. The distribution is a particular case of stable distribution.

These functions return PDF, CDF, and ICDF of the Landau distribution with location a, scale $b > 0$, and the support interval $(-\infty, +\infty)$:

See also: Wikipedia [1219].

dist_landau.**pdf**(x)

Returns $\mathrm{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following an Landau distribution:

$$\mathrm{pdf}_X(x) = \frac{1}{\pi}\int_0^\infty \Re\left(e^{-itx}C_X(t)\right)\mathrm{d}t. \tag{4.40}$$

$$= \frac{1}{\pi c}\int_0^\infty e^{-t}\cos\left(t\left(\frac{x-\mu}{c}\right)+\frac{2t}{\pi}\log\left(\frac{t}{c}\right)\right)\mathrm{d}t., \tag{4.41}$$

where $\Re(z)$ denotes the real part of z.

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pdf: ", dist_landau(mu, sigma).pdf(x))
6.356352346256452561561561561456135 6E-20
```

dist_landau.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following an Landau distribution:

$$\mathrm{cdf}_X(x) = \frac{1}{2} - \frac{1}{\pi}\int_0^\infty \Im\left(\frac{e^{-itx}C_X(t)}{t}\right)\mathrm{d}t,$$

where $\Im(z)$ denotes the imaginary part of z.

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", dist_landau(mu, sigma).pdf(x))
6.356352346256452561561561561456135 6E-20
```

dist_landau.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function function (sf) of a random variable X, following an Landau distribution:

$$\mathrm{sf}_X(x) = 1 - \mathrm{cdf}_X(x) = \int_x^\infty \mathrm{pdf}_X(x)\mathrm{d}t.$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", dist_landau(mu, sigma).pdf(x))
sf: 6.356352346256452561561561561456135 6E-20
```

dist_landau.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function function (qtf) of a random variable X, following an Landau distribution:

$$\text{qtf}_X(q) = \text{no closed form.}$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", dist_landau(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_landau.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function function (isf) of a random variable X, following an Landau distribution:

$$\text{isf}_X(q) = \text{qtf}_X(1-q) = \text{cdf}_X^{-1}(1-q).$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", dist_landau(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_landau.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following an Landau distribution:

$$C_X(t) = \exp\left(it\mu - \frac{2ict}{\pi}\log|t| - c|t|\right).$$

```
>>> from mpdistrib import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", dist_landau(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_landau.**m_x**(t)

Returns NaN, since the moment generating function does not exist.

dist_landau.**k_x**(t, *k=0*)

Returns NaN, since the cumulant generating function does not exist.

dist_landau.**moments**(k)

Returns NaN, since moments do not exist.

dist_landau.**cumulants**(k)

Returns NaN, since cumulants do not exist.

4.12.3 Boost: Holtsmark distribution

The Holtsmark distribution is a stable distribution (see Wikipedia [1223]) with the shape parameters $\alpha = 3/2, \beta = 0$. The Holtsmark distribution is linear with respect to the location parameter μ and scale parameter c.

$$p(x_1; \mu_1, c_1) = p\left(x := \frac{x_1 - \mu_1}{c_1}; \mu := 0, c := 1\right) \cdot \frac{1}{c_1}.$$

The support interval is $(-\infty, +\infty)$.

!!! The following references need to be updated: !!!

See also: https://www.boost.org/doc/libs/1_89_0/libs/math/doc/html/math_toolkit/dist_ref/dists/holtsmark_dist.html

See also: https://en.wikipedia.org/wiki/Holtsmark_distribution

`math53.holtsmark_pdf(mu, c, x)`

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following an Holtsmark distribution

$$\text{pdf}_X(x) = \frac{1}{2\pi} \int_{-\infty}^{\infty} \exp\left(it\mu - |ct|^{3/2}\right) e^{ixt} \mathrm{d}t,$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("FisherFPdf(x, a, b): ", FisherFPdf(x, a, b))
>>> print ("dist_fisher_f(a, b).pdf(x): ", dist_fisher_f(a, b).pdf(x))
6.35635234625645256156156145613 56E+00
```

`math53.holtsmark_cdf(mu, c, x)`

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following an Holtsmark distribution.

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("FisherFCdf(x, a, b): ", FisherFCdf(x, a, b))
>>> print ("dist_fisher_f(a, b).cdf(x): ", dist_fisher_f(a, b).cdf(x))
6.35635234625645256156156145613 56E+00
```

`math53.holtsmark_qtf(mu, c, q)`

Returns $\text{qtf}(q)$, the value of the quantile function (*Qtf*) of the Holtsmark distribution.

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("FisherFQtf(q, a, b): ", FisherFQtf(q, a, b))
>>> print ("dist_fisher_f(a, b).qtf(q): ", dist_fisher_f(a, b).qtf(q))
6.35635234625645256156156145613 56E+00
```

`CtxBoost.dist_holtsmark(m, n)`

Returns an `dist_holtsmark` object, which gives access to the functions descibed below:

```
>>> from xlcalcnet import SReal, FReal, ereal, QReal, CReal, OReal
>>> a = 0; b = 1;
>>> Ctx = SReal
>>> dist_fisher_f = Ctx.dist_fisher_f(a, b)
>>> print ("Dist.qtf(q=0.5): ", Dist.qtf(q=0.5))
6.35635234625645256156156145613 56E+00
```

`dist_holtsmark.`**`pdf`**(x)

Returns pdf(x), the value of the probability density function of the Holtsmark distribution. See *Ctx.holtsmark_pdf* for formulas and examples.

`dist_holtsmark.`**`cdf`**(x)

Returns cdf(x), the value of the cumulative distribution function of the Holtsmark distribution. See *Ctx.holtsmark_cdf* for formulas and examples.

`dist_holtsmark.`**`qtf`**(q)

Returns qtf(q), the value of the quantile function of the Holtsmark distribution. See *Ctx.holtsmark_qtf* for formulas and examples.

`dist_holtsmark.`**`sf`**(x)

Returns sf(x), the value of the survival function (*Sf*) of the Holtsmark distribution.

$$\mathrm{sf}(x) = \begin{cases} \mathrm{ibeta}(n/2, m/2, n/(n+mx)), & mx > n, \\ \mathrm{ibetac}(m/2, n/2, mx/(n+mx)) & mx \le n. \end{cases}$$

Here ibeta$(\cdot)$ denotes the real normalised incomplete beta function (*RealIBeta*), and ibetac$(\cdot)$ denotes the real normalised complementary incomplete beta function (*RealIBetac*).

```
>>> # continued from above
>>> print ("Dist.sf(x=0.5): ", Dist.qtf(x=0.5))
6.35635234625645256156156145613 56E+00
```

`dist_holtsmark.`**`isf`**(q)

Returns isf(q), the value of the inverse survival function (*Isf*) of the Holtsmark distribution.

$$\mathrm{isf}(q) = \frac{nx}{m(1-x)}, \quad \text{where } x = \mathrm{ibetac_inv}(m/2, n/2, q).$$

Here $\mathrm{ibetac_inv}(\cdot)$ denotes the inverse of the real normalised complementary incomplete beta function (*RealIBetacInv*).

```
>>> # continued from above
>>> print ("Dist.isf(x=0.5): ", Dist.isf(x=0.5))
6.35635234625645256156156145613 56E+00
```

`dist_holtsmark.`**`hf`**(x)

Returns hazard(x), the value of the hazard function (*Hf*) of the Holtsmark distribution.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_holtsmark.**chf**(x)

Returns chf(x), the value of the cumulative hazard function (*Chf*) of the Holtsmark distribution.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456 1356E+00
```

dist_holtsmark.**mode**()

Returns the *mode* of the Holtsmark distribution. Since there is not one unique mode, Nan is returned.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456 1356E+00
```

dist_holtsmark.**median**()

Returns the *median* of the Holtsmark distribution. Calculated as $\frac{1}{2}(a+b)$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456 1356E+00
```

dist_holtsmark.**mean**()

Returns the *mean* (expected value) of the Holtsmark distribution. Calculated as $\frac{1}{2}(a+b)$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456 1356E+00
```

dist_holtsmark.**variance**()

Returns the *variance* of the Holtsmark distribution. Calculated as $\frac{1}{8}(b-a)^2$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456 1356E+00
```

dist_holtsmark.**stdev**()

Returns the *standard deviation* of the Holtsmark distribution. Calculated as $\sqrt{\frac{1}{8}(b-a)^2}$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
```

(continues on next page)

(continued from previous page)

```
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

dist_holtsmark.**skewness**()

Returns the *skewness* of the Holtsmark distribution. Calculated as 0.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

dist_holtsmark.**kurtosis**()

Returns the 'proper' *kurtosis* (normalized fourth moment) of the Holtsmark distribution. Calculated as $3/2$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

dist_holtsmark.**kurtosis_excess**()

Returns the *kurtosis excess* of the Holtsmark distribution. Calculated as $-3/2$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

dist_holtsmark.**support_lower_endpoint**()

Returns the *support* of the Holtsmark distribution as a tuple (left, right).

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

dist_holtsmark.**support_upper_endpoint**()

Returns the *support* of the Holtsmark distribution as a tuple (left, right).

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

dist_holtsmark.**range_lower_endpoint**()

Returns the valid *range* of the Holtsmark distribution as a tuple (left, right).

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_holtsmark.**range_upper_endpoint**()

Returns the valid *range* of the Holtsmark distribution as a tuple (left, right).

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

4.12.4 Boost: Map-Airy distribution

The Map-Airy distribution (or Airy distribution of the 'Map'-type) is a stable distribution (see Wikipedia [1223]) with the shape parameters $\alpha = 3/2, \beta = 1$, which describes the probability distribution of the area under a Brownian excursion over a unit interval. For simplicity of numerical computation, this paper evaluates as follows assuming location parameter $\mu = 0$, scale parameter $c = 1/\sqrt[3]{18}$, i.e. $p(x) = p(x; \alpha = 3/2, \beta = 1, \mu = 0, c = 1/\sqrt[3]{18})$. The Map-Airy distribution is linear with respect to the location parameter μ and scale parameter c.

$$p(x_1; \mu_1, c_1) = p\left(x := \frac{x_1 - \mu_1}{c_1}; \mu := 0, c := 1\right) \cdot \frac{1}{c_1}.$$

The support interval is $(-\infty, +\infty)$:

!!! The following references need to be updated: !!!

See also: https://www.boost.org/doc/libs/1_89_0/libs/math/doc/html/math_toolkit/dist_ref/dists/mapairy_dist.html

See also: https://mathworld.wolfram.com/Map-AiryDistribution.html

math53.**mapairy_pdf**(*mu*, *c*, *x*)

Returns pdf(x), the value of the probability density function (*Pdf*) of the MapAiry distribution:

Boost:

$$\text{pdf}(x) = 2e^{-2x^3/3}\left(x\text{Ai}(x^2) - \text{Ai}'(x^2)\right).$$

Wolfram:

$$\text{pdf}(x) = 2e^{2x^3/3}\left(-x\text{Ai}(x^2) - \text{Ai}'(x^2)\right).$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("StudentTPdf(x, a, b): ", StudentTPdf(x, a, b))
>>> print ("dist_student_t(a, b).pdf(x): ", dist_student_t(a, b).pdf(x))
6.35635234625645256156156145613 56E+00
```

math53.**mapairy_cdf**(*mu*, *c*, *x*)

Returns cdf(x), the value of the cumulative distribution function (*Cdf*) of the MapAiry distribution:

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("StudentTCdf(x, a, b): ", StudentTCdf(x, a, b))
>>> print ("dist_student_t(a, b).cdf(x): ", dist_student_t(a, b).cdf(x))
6.35635234625645256156156145613 56E+00
```

math53.**mapairy_qtf**(*mu*, *c*, *q*)

Returns qtf(q), the value of the quantile function (*Qtf*) of the MapAiry distribution:

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("StudentTQtf(q, a, b): ", StudentTQtf(q, a, b))
>>> print ("dist_student_t(a, b).qtf(q): ", dist_student_t(a, b).qtf(q))
6.35635234625645256156156145613 56E+00
```

CtxBoost.**dist_mapairy**(a, b)

Returns an dist_mapairy object, which gives access to the functions descibed below:

```
>>> from xlcalcnet import SReal, FReal, ereal, QReal, CReal, OReal
>>> a = 0; b = 1;
>>> Ctx = SReal
>>> dist_student_t = Ctx.dist_student_t(a, b)
>>> print ("Dist.qtf(q=0.5): ", Dist.qtf(q=0.5))
6.35635234625645256156156145613 56E+00
```

dist_mapairy.**pdf**(x)

Returns pdf(x), the value of the probability density function of the Map-Airy distribution. See *Ctx.mapairy_pdf* for formulas and examples.

dist_mapairy.**cdf**(x)

Returns cdf(x), the value of the cumulative distribution function of the Map-Airy distribution. See *Ctx.mapairy_cdf* for formulas and examples.

dist_mapairy.**qtf**(q)

Returns qtf(q), the value of the quantile function of the Map-Airy distribution. See *Ctx.mapairy_qtf* for formulas and examples.

dist_mapairy.**sf**(x)

Returns sf(x), the value of the survival function (*Sf*) of the Map-Airy distribution.

$$\mathrm{sf}(x) = \mathrm{cdf}_X(-x)$$

```
>>> # continued from above
>>> print ("Dist.sf(x=0.5): ", Dist.qtf(x=0.5))
6.35635234625645256156156145613 56E+00
```

dist_mapairy.**isf**(q)

Returns isf(q), the value of the inverse survival function (*Isf*) of the Map-Airy distribution.

$$\mathrm{isf}(q) = -\mathrm{qtf}(q).$$

```
>>> # continued from above
>>> print ("Dist.isf(x=0.5): ", Dist.isf(x=0.5))
6.35635234625645256156156145613 56E+00
```

dist_mapairy.**hf**(x)

Returns hazard(x), the value of the hazard function (*Hf*) of the Map-Airy distribution.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_mapairy.**chf**(x)

Returns chf(x), the value of the cumulative hazard function (*Chf*) of the Map-Airy distribution.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_mapairy.**mode**()

Returns the *mode* of the Map-Airy distribution. Since there is not one unique mode, Nan is returned.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_mapairy.**median**()

Returns the *median* of the Map-Airy distribution. Calculated as $\frac{1}{2}(a+b)$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_mapairy.**mean**()

Returns the *mean* (expected value) of the Map-Airy distribution. Calculated as $\frac{1}{2}(a+b)$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_mapairy.**variance**()

Returns the *variance* of the Map-Airy distribution. Calculated as $\frac{1}{8}(b-a)^2$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_mapairy.**stdev**()

Returns the *standard deviation* of the Map-Airy distribution. Calculated as $\sqrt{\frac{1}{8}(b-a)^2}$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_mapairy.**skewness**()

Returns the *skewness* of the Map-Airy distribution. Calculated as 0.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_mapairy.**kurtosis**()

Returns the 'proper' *kurtosis* (normalized fourth moment) of the Map-Airy distribution. Calculated as $3/2$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_mapairy.**kurtosis_excess**()

Returns the *kurtosis excess* of the Map-Airy distribution. Calculated as $-3/2$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_mapairy.**support_lower_endpoint**()

Returns the *support* of the Map-Airy distribution as a tuple (left, right).

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_mapairy.**support_upper_endpoint**()

Returns the *support* of the Map-Airy distribution as a tuple (left, right).

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_mapairy.**range_lower_endpoint**()

Returns the valid *range* of the Map-Airy distribution as a tuple (left, right).

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456 1356E+00
```

dist_mapairy.**range_upper_endpoint**()

Returns the valid *range* of the Map-Airy distribution as a tuple (left, right).

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456 1356E+00
```

4.12.5 Boost: Saspoint5 distribution

The SaS point5 distribution is a stable distribution (see Wikipedia [1223]) with the shape parameters $\alpha = 1/2, \beta = 0$. The Saspoint5 distribution is linear with respect to the location parameter μ and scale parameter c.

$$p(x_1; \mu_1, c_1) = p\left(x := \frac{x_1 - \mu_1}{c_1}; \mu := 0, c := 1\right) \cdot \frac{1}{c_1}.$$

The support interval is $(-\infty, +\infty)$.

!!! The following references need to be updated: !!!

See also: https://www.boost.org/doc/libs/1_89_0/libs/math/doc/html/math_toolkit/dist_ref/dists/saspoint5_dist.html

See also: https://en.wikipedia.org/wiki/Stable_distribution#Other_analytic_cases

`math53.saspoint5_pdf(mu, c, x)`

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following an Saspoint5 distribution. Let $S(x)$ and $C(x)$ denote the Fresnel integrals. Then:

$$\text{pdf}_X(x) = \frac{1}{\sqrt{2\pi|x|^3}}\left(\sin\left(\tfrac{1}{4|x|}\right)\left[\frac{1}{2} - S\left(\tfrac{1}{\sqrt{2\pi|x|}}\right)\right] + \cos\left(\tfrac{1}{4|x|}\right)\left[\frac{1}{2} - C\left(\tfrac{1}{\sqrt{2\pi|x|}}\right)\right]\right).$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("StudentTPdf(x, a, b): ", StudentTPdf(x, a, b))
>>> print ("dist_student_t(a, b).pdf(x): ", dist_student_t(a, b).pdf(x))
6.35635234625645256156156145613356E+00
```

`math53.saspoint5_cdf(mu, c, x)`

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following an Saspoint5 distribution.

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("StudentTCdf(x, a, b): ", StudentTCdf(x, a, b))
>>> print ("dist_student_t(a, b).cdf(x): ", dist_student_t(a, b).cdf(x))
6.35635234625645256156156145613356E+00
```

`math53.saspoint5_qtf(mu, c, q)`

Returns $\text{qtf}(q)$, the value of the quantile function (*Qtf*) of the Saspoint5 distribution:

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("StudentTQtf(q, a, b): ", StudentTQtf(q, a, b))
>>> print ("dist_student_t(a, b).qtf(q): ", dist_student_t(a, b).qtf(q))
6.35635234625645256156156145613356E+00
```

CtxBoost.**dist_saspoint5**(a, b)

Returns an dist_saspoint5 object, which gives access to the functions descibed below:

```
>>> from xlcalcnet import SReal, FReal, ereal, QReal, CReal, OReal
>>> a = 0; b = 1;
>>> Ctx = SReal
>>> dist_student_t = Ctx.dist_student_t(a, b)
>>> print ("Dist.qtf(q=0.5): ", Dist.qtf(q=0.5))
6.35635234625645256156156145613 56E+00
```

dist_saspoint5.**pdf**(x)

Returns pdf(x), the value of the probability density function of the Saspoint5 distribution. See *Ctx.saspoint5_pdf* for formulas and examples.

dist_saspoint5.**cdf**(x)

Returns cdf(x), the value of the cumulative distribution function of the Saspoint5 distribution. See *Ctx.saspoint5_cdf* for formulas and examples.

dist_saspoint5.**qtf**(q)

Returns qtf(q), the value of the quantile function of the Saspoint5 distribution. See *Ctx.saspoint5_qtf* for formulas and examples.

dist_saspoint5.**sf**(x)

Returns sf(x), the value of the survival function (*Sf*) of the Saspoint5 distribution.

$$\mathrm{sf}(x) = \mathrm{cdf}_X(-x)$$

```
>>> # continued from above
>>> print ("Dist.sf(x=0.5): ", Dist.qtf(x=0.5))
6.35635234625645256156156145613 56E+00
```

dist_saspoint5.**isf**(q)

Returns isf(q), the value of the inverse survival function (*Isf*) of the Saspoint5 distribution.

$$\mathrm{isf}(q) = -\mathrm{qtf}(q).$$

```
>>> # continued from above
>>> print ("Dist.isf(x=0.5): ", Dist.isf(x=0.5))
6.35635234625645256156156145613 56E+00
```

dist_saspoint5.**hf**(x)

Returns hazard(x), the value of the hazard function (*Hf*) of the Saspoint5 distribution.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_saspoint5.**chf**(x)

Returns chf(x), the value of the cumulative hazard function (*Chf*) of the Saspoint5 distribution.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

dist_saspoint5.**mode**()

Returns the *mode* of the Saspoint5 distribution. Since there is not one unique mode, Nan is returned.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

dist_saspoint5.**median**()

Returns the *median* of the Saspoint5 distribution. Calculated as $\frac{1}{2}(a+b)$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

dist_saspoint5.**mean**()

Returns the *mean* (expected value) of the Saspoint5 distribution. Calculated as $\frac{1}{2}(a+b)$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

dist_saspoint5.**variance**()

Returns the *variance* of the Saspoint5 distribution. Calculated as $\frac{1}{8}(b-a)^2$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

dist_saspoint5.**stdev**()

Returns the *standard deviation* of the Saspoint5 distribution. Calculated as $\sqrt{\frac{1}{8}(b-a)^2}$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

dist_saspoint5.**skewness**()

Returns the *skewness* of the Saspoint5 distribution. Calculated as 0.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_saspoint5.**kurtosis**()

Returns the 'proper' *kurtosis* (normalized fourth moment) of the Saspoint5 distribution. Calculated as $3/2$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_saspoint5.**kurtosis_excess**()

Returns the *kurtosis excess* of the Saspoint5 distribution. Calculated as $-3/2$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_saspoint5.**support_lower_endpoint**()

Returns the *support* of the Saspoint5 distribution as a tuple (left, right).

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_saspoint5.**support_upper_endpoint**()

Returns the *support* of the Saspoint5 distribution as a tuple (left, right).

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_saspoint5.**range_lower_endpoint**()

Returns the valid *range* of the Saspoint5 distribution as a tuple (left, right).

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_saspoint5.**range_upper_endpoint**()

Returns the valid *range* of the Saspoint5 distribution as a tuple (left, right).

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

4.13 Elementary discrete (lattice) distributions

4.13.1 Boost: Bernoulli distribution

The following functions return the pmf, cdf, qtf or boost class of the Bernoulli distribution

The Bernoulli distribution is a discrete distribution of the outcome of a single trial with only two results, 0 (failure) or 1 (success), with a probability of success p.

The Bernoulli distribution is the simplest building block on which other discrete distributions of sequences of independent Bernoulli trials can be based.

The Bernoulli is the binomial distribution (k = 1, p) with only one trial.

The domain of the random variable is 0 and 1, and the useful supported range is only 0 or 1.

The support interval for k is $0, 1$, and $0 \leq q \leq 1$.

The Bernoulli distribution is implemented here as a strict discrete distribution. If a generalised version, allowing k to be any real, is required then the binomial distribution with a single trial should be used, for example:

binomial_distribution(1, 0.25)

!!! The following references need to be updated: !!!

See also Wikipedia [1171], MathWorld [817], BoostMath [76] .

math53.**bernoulli_pmf**(*p*, *k*)

Returns pmf(x), the value of the probability mass function (*Pmf*) of the Bernoulli distribution. It is calculated using the relation pmf(k) $= 1 - p$ for $k = 0$, else p.

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("BernoulliPdf(x, a, b): ", BernoulliPdf(x, a, b))
>>> print ("dist_bernoulli(a, b).pdf(x): ", dist_bernoulli(a, b).pdf(x))
6.35635234625645256156156145613 56E+00
```

math53.**bernoulli_cdf**(*p*, *k*)

Returns cdf(x), the value of the cumulative distribution function (*Cdf*) of the Bernoulli distribution. It is calculated using the relation cdf(k) $= 1 - p$ for $k = 0$, else 1.

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("BernoulliCdf(x, a, b): ", BernoulliCdf(x, a, b))
>>> print ("dist_bernoulli(a, b).cdf(x): ", dist_bernoulli(a, b).cdf(x))
6.35635234625645256156156145613 56E+00
```

math53.**bernoulli_qtf**(*p*, *q*)

Returns qtf(q), the value of the quantile function (*Qtf*) of the Bernoulli distribution. It is calculated using the relation qtf(k) $= 0$ for $k \leq (1 - p)$, else 1.

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("BernoulliQtf(q, a, b): ", BernoulliQtf(q, a, b))
>>> print ("dist_bernoulli(a, b).qtf(q): ", dist_bernoulli(a, b).qtf(q))
6.35635234625645256156156145613 56E+00
```

CtxBoost.**dist_bernoulli**(p)

Returns an dist_bernoulli object, which gives access to the functions descibed below:

```
>>> from xlcalcnet import SReal, FReal, ereal, QReal, CReal, OReal
>>> a = 0; b = 1;
>>> Ctx = SReal
>>> dist_bernoulli = Ctx.dist_bernoulli(a, b)
>>> print ("Dist.qtf(q=0.5): ", Dist.qtf(q=0.5))
6.35635234625645256156156145613 56E+00
```

dist_bernoulli.**pmf**(x)

Returns pdf(x), the value of the probability density function of the Bernoulli distribution. See *Ctx.BernoulliPmf* for formulas and examples.

dist_bernoulli.**cdf**(x)

Returns cdf(x), the value of the cumulative distribution function of the Bernoulli distribution. See *Ctx.BernoulliCdf* for formulas and examples.

dist_bernoulli.**qtf**(q)

Returns qtf(q), the value of the quantile function of the Bernoulli distribution. See *Ctx.BernoulliQtf* for formulas and examples.

dist_bernoulli.**sf**(x)

Returns sf(x), the value of the survival function (*Sf*) of the Bernoulli distribution. It is calculated using the relation $\text{sf}(k) = p$ for $k = 0$, else 0.

```
>>> # continued from above
>>> print ("Dist.sf(x=0.5): ", Dist.qtf(x=0.5))
6.35635234625645256156156145613 56E+00
```

dist_bernoulli.**isf**(q)

Returns isf(q), the value of the inverse survival function (*Isf*) of the Bernoulli distribution. It is calculated using the relation $\text{qtf}(k) = 1$ for $k \leq (1 - p)$, else 0.

```
>>> # continued from above
>>> print ("Dist.isf(x=0.5): ", Dist.isf(x=0.5))
6.35635234625645256156156145613 56E+00
```

dist_bernoulli.**hf**(x)

Returns hazard(x), the value of the hazard function (*Hf*) of the Bernoulli distribution.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_bernoulli.**chf**(x)

Returns chf(x), the value of the cumulative hazard function (*Chf*) of the Bernoulli distribution.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

dist_bernoulli.**mode**()

Returns the *mode* of the Bernoulli distribution, which is 0 if $(p < 0.5)$ else 1.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

dist_bernoulli.**median**()

Returns the *median* of the Bernoulli distribution. Calculated as *tbd*.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

dist_bernoulli.**mean**()

Returns the *mean* (expected value) of the Bernoulli distribution, which is p.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

dist_bernoulli.**variance**()

Returns the *variance* of the Bernoulli distribution. Calculated as $p(1 - p)$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

dist_bernoulli.**stdev**()

Returns the *standard deviation* of the Bernoulli distribution. Calculated as $\sqrt{p(1 - p)}$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
```

(continues on next page)

(continued from previous page)

```
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_bernoulli.**skewness**()

Returns the *skewness* of the Bernoulli distribution. Calculated as $(1 - 2p)/\sqrt{p(1-p)}$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_bernoulli.**kurtosis**()

Returns the 'proper' *kurtosis* (normalized fourth moment) of the Bernoulli distribution. Calculated as $3+(1-6p(1-p))/(p(1-p))$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_bernoulli.**kurtosis_excess**()

Returns the *kurtosis excess* of the Bernoulli distribution. Calculated as $(1 - 6p(1-p))/(p(1-p))$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_bernoulli.**support_lower_endpoint**()

Returns the *support* of the Bernoulli distribution as a tuple (left, right).

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_bernoulli.**support_upper_endpoint**()

Returns the *support* of the Bernoulli distribution as a tuple (left, right).

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_bernoulli.**range_lower_endpoint**()

Returns the valid *range* of the Bernoulli distribution as a tuple (left, right).

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

dist_bernoulli.**range_upper_endpoint**()

Returns the valid *range* of the Bernoulli distribution as a tuple (left, right).

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

4.13.2 Boost: Geometric distribution

The following functions return the pmf, cdf, qtf or boost class of the geometric distribution with parameter $p, 0 \leq p \leq 1$ (p is the probability that any one trial will be successful, it is also known as "success fraction"). The function returns the probability of obtaining exactly k failures from k trials with success fraction p. For this implementation, the set of trials includes zero (unlike another definition where the set of trials starts at one, sometimes named shifted), so the support interval for k is $(0, \infty)$, and $0 \leq q \leq 1$.

See also Wikipedia [1171], MathWorld [817], BoostMath [76] .

|newpage|

math53.**geometric_pmf**(*p*, *k*)

Returns pmf(x), the value of the probability mass function (*Pmf*) of the geometric distribution:

$$\text{pmf}_X(k) = p(1-p)^k = p \cdot \exp\left(k\text{log1p}(-p)\right).$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("GeometricPdf(x, a, b): ", GeometricPdf(x, a, b))
>>> print ("dist_geometric(a, b).pdf(x): ", dist_geometric(a, b).pdf(x))
6.356352346256452561561561561456135 6E+00
```

|newpage|

math53.**geometric_cdf**(*p*, *k*)

Returns cdf(x), the value of the cumulative distribution function (*Cdf*) of the geometric distribution. The cumulative distribution function returns the probability of obtaining k failures or fewer from k trials with success fraction p and success on the last trial.

$$\text{cdf}(x) = 1 - (1-p)^{k+1} = -\text{expm1}\left(\text{log1p}(-p)(k+1)\right).$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("GeometricCdf(x, a, b): ", GeometricCdf(x, a, b))
>>> print ("dist_geometric(a, b).cdf(x): ", dist_geometric(a, b).cdf(x))
6.35635234625645256156156145613 56E+00
```

|newpage|

`math53.`**`geometric_qtf`**`(`p, q`)`

Returns qtf(q), the value of the quantile function (*Qtf*) of the geometric distribution. The quantile function returns the greatest number of failures k expected to be observed from k trials with success fraction p, at probability q. Note that the value returned is a real-number, and not an integer. Depending on the use case you may want to take either the floor or ceiling of the real result.

$$\text{qtf}(q) = \frac{\text{log1p}(-q)}{\text{log1p}(-p)} - 1.$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("GeometricQtf(q, a, b): ", GeometricQtf(q, a, b))
>>> print ("dist_geometric(a, b).qtf(q): ", dist_geometric(a, b).qtf(q))
6.35635234625645256156156145613 56E+00
```

|newpage|

`class` `ctx.`**`dist_geometric`**`(`p`)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

The geometric distribution is a (discrete or continuous) probability distribution with parameter $p, 0 \leq p \leq 1$ (p is the probability that any one trial will be successful, it is also known as "success fraction"). The function returns the probability of obtaining exactly k failures from k trials with success fraction p. For this implementation, the set of trials includes zero (unlike another definition where the set of trials starts at one, sometimes named shifted), so the support interval for k is $(0, \infty)$. See also Wikipedia [1171], MathWorld [817], BoostMath [76] , and Witkovský [1478], R (Statistical System) [529].

|newpage|

`dist_geometric.`**`pmf`**`(`x`)`

Returns $\text{pmf}_X(x)$, the probability mass function (pmf) of a random variable X, following an geometric distribution:

$$\text{pmf}_X(k) = p(1-p)^k = p \cdot \exp\left(k\text{log1p}(-p)\right)$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pmf: ", geometric(mu, sigma).pmf(x))
6.35635234625645256156156145613 56E-20
```

|newpage|

`dist_geometric.cdf(`x`)`

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following an geometric distribution:

$$\mathrm{cdf}_X(x) = 1 - (1-p)^{k+1} = -\mathrm{expm1}\left(\mathrm{log1p}(-p)(k+1)\right)$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", geometric(mu, sigma).pmf(x))
6.35635234625645256156156145613 56E-20
```

|newpage|

`dist_geometric.sf(`x`)`

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following an geometric distribution:

$$\mathrm{sf}_X(x) = (1-p)^{k+1} = \exp\left(\mathrm{log1p}(-p)(k+1)\right)$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", geometric(mu, sigma).pmf(x))
sf: 6.35635234625645256156156145613 56E-20
```

|newpage|

`dist_geometric.qtf(`q`)`

Returns $\mathrm{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following an geometric distribution:

$$\mathrm{qtf}_X(q) = \frac{\mathrm{log1p}(-q)}{\mathrm{log1p}(-p)} - 1$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", geometric(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

|newpage|

`dist_geometric.isf(`q`)`

Returns $\mathrm{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following an geometric distribution:

$$\mathrm{isf}_X(q) = \frac{\log(q)}{\mathrm{log1p}(-p)} - 1$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", geometric(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

|newpage|

dist_geometric.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following an geometric distribution:

$$C_X(t) = ??.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", geometric(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

|newpage|

dist_geometric.**m_x**(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following an geometric distribution:

$$M_X(t) = ??.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("m_x: ", geometric(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

|newpage|

dist_geometric.**k_x**(t, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following an geometric distribution:

$$K_X(t) = ??.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", geometric(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

|newpage|

dist_geometric.**moments**(k)

Returns the first j central moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following an geometric distribution (Wikipedia). The raw moments are calculated from the central moments.

$$\mu_X(n) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", geometric(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

|newpage|

dist_geometric.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following an geometric distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", geometric(mu, sigma).cumulants(k))
6.35635234625645256156156145561356E+00
```

The geometric distribution is used when there are exactly two mutually exclusive outcomes of a Bernoulli trial: these outcomes are labelled "success" and "failure". For Bernoulli trials each with success fraction p, the geometric distribution gives the probability of observing k trials (failures, events, occurrences, or arrivals) before the first success.

The pmf of a variable following a geometric distribution with parameter p is given by

$$f(k;p) = p(1-p)^k$$

The CDF of a variable following a geometric distribution with parameter p is given by

$$F(k;p) = 1 - (1-p)^{k+1}$$

The ICDF of a variable following a geometric distribution with parameter p is given by

$$F^{-1}(x;p) = \frac{\log1\mathrm{p}(-x)}{\log1\mathrm{p}(-p)} - 1$$

4.13.3 Boost: Poisson distribution

The following functions return the pmf, cdf, qtf or boost class of the Poisson distribution with mean mu and the support interval $(0, +\infty)$, and $0 \leq q \leq 1$.

See also Wikipedia [1184], MathWorld [831], BoostMath [84], Ehrhardt [295] (3.9.26).

math53.**poisson_pmf**(*mu*, *x*)

Returns pmf(x), the value of the probability mass function (*Pmf*) of the Poisson distribution:

$$\text{pmf}(x) = \frac{\mu^k}{k!} e^{-\mu}.$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("PoissonPdf(x, a, b): ", PoissonPdf(x, a, b))
>>> print ("dist_poisson(a, b).pdf(x): ", dist_poisson(a, b).pdf(x))
6.356352346256452561561561561456l356E+00
```

math53.**poisson_cdf**(*mu*, *x*)

Returns cdf(x), the value of the cumulative distribution function (*Cdf*) of the Poisson distribution:

$$\text{cdf}(x) = e^{-\mu} \sum_{i=0}^{k} \frac{\mu^i}{i!} = Q(1 + k, \mu).$$

Here $Q(\cdot)$ denotes the upper regularized incomplete gamma function (*RealGammaQ*).

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("PoissonCdf(x, a, b): ", PoissonCdf(x, a, b))
>>> print ("dist_poisson(a, b).cdf(x): ", dist_poisson(a, b).cdf(x))
6.356352346256452561561561561456l356E+00
```

math53.**poisson_qtf**(*mu*, *q*)

Returns qtf(q), the value of the quantile function (*Qtf*) of the Poisson distribution:

$$\text{qtf}(q) = \text{gammaq_inva}(\mu, p) - 1.$$

Here $\text{gammaq_inva}(\cdot)$ denotes the inverse (on parameter a) of the real upper normalised incomplete gamma function (*RealGammaQInva*).

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("PoissonQtf(q, a, b): ", PoissonQtf(q, a, b))
>>> print ("dist_poisson(a, b).qtf(q): ", dist_poisson(a, b).qtf(q))
6.356352346256452561561561561456l356E+00
```

class ctx.**dist_poisson**(*lambda1*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The Poisson distribution is a discrete (lattice) probability distribution with mean mu and the support interval $(0, +\infty)$. See also Wikipedia [1184], MathWorld [831], BoostMath [84], and Witkovský [1485], R (Statistical System) [532].

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.pdtr.html#scipy.special.pdtr

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.pdtrc.html#scipy.special.pdtrc

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.pdtri.html#scipy.special.pdtri

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.pdtrik.html#scipy.special.pdtrik

dist_poisson.**pmf**(x)

Returns $\mathrm{pmf}_X(x)$, the probability mass function (pmf) of a random variable X, following a Poisson distribution:

$$\mathrm{pmf}_X(x) = \frac{\lambda_1^k}{k!} e^{-\lambda_1}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pmf: ", poisson(mu, sigma).pmf(x))
6.3563523462564525615615615614561356E-20
```

dist_poisson.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a Poisson distribution:

$$\mathrm{cdf}_X(x) = e^{-\lambda_1} \sum_{i=0}^{k} \frac{\lambda_1^i}{i!} = Q(1+k, \lambda_1).$$

Here $Q(\cdot)$ denotes the upper regularized incomplete gamma functions.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", poisson(mu, sigma).pmf(x))
6.3563523462564525615615615614561356E-20
```

dist_poisson.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following a Poisson distribution:

$$\mathrm{sf}_X(x) = 1 - e^{-\lambda_1} \sum_{i=0}^{k} \frac{\lambda_1^i}{i!} = P(1+k, \lambda_1).$$

Here $P(\cdot)$ denotes the lower regularized incomplete gamma functions.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", poisson(mu, sigma).pmf(x))
sf: 6.3563523462564525615615615614561356E-20
```

dist_poisson.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following a Poisson distribution.

$$\text{qtf}_X(q) = \text{gamma}_{\text{q}}\text{_inva}(\lambda_1, p) - 1.$$

Here $\text{gamma}_{\text{q}}\text{_inva}(\cdot)$ denotes the inverse (on parameter a) of the real normalised incomplete gamma function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", poisson(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_poisson.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following a Poisson distribution:

$$\text{isf}_X(q) = \text{gamma}_{\text{p}}\text{_inva}(\lambda_1, q) - 1.$$

Here $\text{gamma}_{\text{p}}\text{_inva}(\cdot)$ denotes the inverse (on parameter a) of the real normalised complementary incomplete gamma function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", poisson(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_poisson.**g_x**(t)

Returns $G_X(t)$, the probability generating function of a random variable X, following a Poisson distribution:

$$G_X(t) = \exp(\lambda(t-1)).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", poisson(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_poisson.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following a Poisson distribution:

$$C_X(t) = \exp(\lambda(e^{it}-1)).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", poisson(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_poisson.**m_x**(*t*)

Returns $M_X(t)$, the moment generating function of a random variable X, following a Poisson distribution:

$$M_X(t) = \exp(\lambda(e^t - 1)).$$

$$L_X(t) = \exp(\lambda(e^{-t} - 1)).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("m_x: ", poisson(mu, sigma).c_x(t))
6.356352346256452561561561456135 6E+00
```

dist_poisson.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following a Poisson distribution:

$$K_X(t) = \lambda(e^t - 1).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", poisson(mu, sigma).k_x(t, k))
6.356352346256452561561561456135 6E+00
```

dist_poisson.**moments**(*k*)

Returns the first j moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following a Poisson distribution (Wikipedia). The moments are calculated from the cumulants.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", poisson(mu, sigma).moments(k))
6.356352346256452561561561456135 6E+00
```

dist_poisson.**cumulants**(*k*)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following a Poisson distribution:

$$\kappa_r = \lambda, \quad r = 1, 2, \ldots$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", poisson(mu, sigma).cumulants(k))
6.356352346256452561561561456135 6E+00
```

Approximations

ctx.**poisson_ecf**(*x*, *f*, *rho*, *omega*)

where ctx is ipm, dec, mpm, or gmp.

Calculates the Edgeworth approximation to the pdf, cdf and sf.

ctx.**poisson_ecf_inv**(*x*, *f*, *rho*, *omega*)

where ctx is ipm, dec, mpm, or gmp.

Calculates the Cornish-Fisher approximation to the qtf and isf.

ctx.**poisson_spa**(*x*, *n*, *results='c'*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

Calculates the Luggannini-Rice saddlepoint approximation of the pdf, cdf and sf.

The solution $\hat{s}(x)$ of the saddlepoint equation $K_X^{(1)}(\hat{s}(x)) = x$, of a random variable X, following a Poisson distribution is given by:

$$\hat{s}(x) = \log(k/\lambda).$$

ctx.**poisson_spa_inv**(*x*, *n*, *results='qtf'*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

Calculates the inverse Jensen saddlepoint approximation of the qtf and isf.

4.13.4 Boost: Binomial distribution

The following functions return the pmf, cdf, qtf or boost class of the binomial distribution with number of trials $n \geq 0$ and success probability $0 \leq p \leq 1$, and $0 \leq q \leq 1$.

See also Wikipedia [1168], MathWorld [812], BoostMath [71], Ehrhardt [295] (3.9.3).

math53.**binomial_pmf**(*n*, *p*, *k*)

Returns pmf(x), the value of the probability density function (*Pmf*) of the binomial distribution:

$$\text{pmf}(x) = \binom{n}{k} p^k (1-p)^{n-k} = f_{\text{Beta}}(k+1, n-k+1, p)/(n+1).$$

Here $f_{\text{Beta}}(\cdot)$ denotes the PDF of the central beta distribution.

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("BinomialPdf(x, a, b): ", BinomialPdf(x, a, b))
>>> print ("dist_binomial(a, b).pdf(x): ", dist_binomial(a, b).pdf(x))
6.356352346256452561561561561456 1356E+00
```

math53.**binomial_cdf**(*n*, *p*, *k*)

Returns cdf(x), the value of the cumulative distribution function (*Cdf*) of the binomial distribution:

$$\text{cdf}(x) = \sum_{j=0}^{k} \text{pmf}_X(j) = \text{ibetac}(k+1, n-k, p).$$

Here ibetac$(\cdot)$ denotes the real normalised complementary incomplete beta function (*RealIBetac*).

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("BinomialCdf(x, a, b): ", BinomialCdf(x, a, b))
>>> print ("dist_binomial(a, b).cdf(x): ", dist_binomial(a, b).cdf(x))
6.356352346256452561561561561456 1356E+00
```

math53.**binomial_qtf**(*n*, *p*, *q*)

Returns qtf(q), the value of the quantile function (*Qtf*) of the binomial distribution:

There is no known closed form for qtf(q): it is computed with Newton iterations where the starting values are from the corresponding Boost functions.

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("BinomialQtf(q, a, b): ", BinomialQtf(q, a, b))
>>> print ("dist_binomial(a, b).qtf(q): ", dist_binomial(a, b).qtf(q))
6.356352346256452561561561561456 1356E+00
```

class ctx.**dist_binomial**(n, p)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The binomial distribution is a discrete (lattice) probability distribution with number of trials $n \geq 0$ and success probability $0 \leq p \leq 1$. See also Wikipedia [1168], MathWorld [812], BoostMath [71], Witkovský [1475], R (Statistical System) [528].

A special case is the Bernoulli distribution, see See also Wikipedia [1167], MathWorld [811], and BoostMath [70].

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.bdtr.html#scipy.special.bdtr

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.bdtrc.html#scipy.special.bdtrc

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.bdtri.html#scipy.special.bdtri

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.bdtrik.html#scipy.special.bdtrik

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.bdtrin.html#scipy.special.bdtrin

dist_binomial.**pmf**(x)

Returns $\mathrm{pmf}_X(x)$, the probability mass function (pmf) of a random variable X, following an binomial distribution:

$$\mathrm{pmf}_X(x) = \binom{n}{k} p^k (1-p)^{n-k} = f_{\mathrm{Beta}}(k+1, n-k+1, p)/(n+1).$$

and $f_{\mathrm{Beta}}(\cdot)$ and $F_{\mathrm{Beta}}(\cdot)$ denote the PDF and CDF, respectively, of the central beta distribution.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pmf: ", binomial(mu, sigma).pmf(x))
6.35635234625645256156156145613 56E-20
```

dist_binomial.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following an binomial distribution:

$$\mathrm{cdf}_X(x) = \sum_{j=0}^{k} \mathrm{pmf}_X(j) = F_{\mathrm{Beta}}(1-p; n-k, k+1).$$

and $f_{\mathrm{Beta}}(\cdot)$ and $F_{\mathrm{Beta}}(\cdot)$ denote the PDF and CDF, respectively, of the central beta distribution.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", binomial(mu, sigma).pmf(x))
6.35635234625645256156156145613 56E-20
```

dist_binomial.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following an binomial distribution:

$$\mathrm{sf}_X(x) = 1 - \mathrm{cdf}_X(x).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", binomial(mu, sigma).pmf(x))
sf: 6.35635234625645256156156145613 56E-20
```

dist_binomial.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following an binomial distribution. There is no closed form for the qtf: It is computed with Newton iterations where the starting values are from Boost.

$$\text{qtf}_X(q) = tbd.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", binomial(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_binomial.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following an binomial distribution:

$$\text{isf}_X(q) = \text{qtf}_X(1-q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", binomial(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_binomial.**g_x**(t)

Returns $G_X(t)$, the probability generating function of a random variable X, following an binomial distribution:

$$G_X(t) = (Pt + Q)^n.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", binomial(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_binomial.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following an binomial distribution:

$$C_X(t) = \left(Pe^{it} + Q\right)^n.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", binomial(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_binomial.**m_x**(*t*)

Returns $M_X(t)$, the moment generating function of a random variable X, following an binomial distribution:

$$M_X(t) = \left(Pe^t + Q\right)^n.$$

$$L_X(t) = \left(Pe^{-t} + Q\right)^n.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("m_x: ", binomial(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_binomial.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following an binomial distribution:

$$K_X(t) = K_X(t) = n \log\left(Pe^t + Q\right).$$

$K_X(t)$, the cumulant generating function, and its j^{th} derivatives, $K_X^{(j)}(t), j = 1 \ldots k$, of a random variable X, following a binomial distribution, are defined as

$$K_X(t) = n \log\left(p \cdot e^t + 1 - p\right),$$

$$K_X^{(1)}(t) = \frac{n \cdot p \cdot e^x}{p(e^x - 1) + 1},$$

$$K_X^{(2)}(t) = -\frac{n(p-1)p \cdot e^x}{(p(e^x - 1) + 1)^2},$$

$$K_X^{(3)}(t) = \frac{n(p-1)p \cdot e^x (p \cdot e^x + p - 1)}{(p(e^x - 1) + 1)^3},$$

and for $j \geq 4$ the derivatives are calculated by numerically differentiating $K_X^{(3)}(t)$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", binomial(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

dist_binomial.**moments**(*k*)

Returns the first j central moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following an binomial distribution (Wikipedia). The raw moments are calculated from the central moments.

$$\mu_X(r) = nPQ \sum_{i=0}^{r-2} \binom{r-1}{i} \mu_i - P \sum_{i=0}^{r-2} \binom{r-1}{i} \mu_{i+1}, \quad r > 2; \quad \mu_1 = nP, \quad \mu_2 = nPQ.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", binomial(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

`dist_binomial.`**`cumulants`**(*k*)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following an binomial distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", binomial(mu, sigma).cumulants(k))
6.35635234625645256156156145614561356E+00
```

Approximations

`ctx.`**`hypergeo_ft`**(*x*, *n*, *results='cdf'*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Calculates the pdf, cdf and sf from the characteristic function (see *pmf_from_cf_lattice()* and *cdf_from_cf_lattice()*).

`ctx.`**`binomial_ft`**(*x*, *n*, *results='cdf'*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Calculates the pdf, cdf and sf from the characteristic function (see *pmf_from_cf_lattice()* and *cdf_from_cf_lattice()*).

`ctx.`**`binomial_ecf`**(*k*, *n*, *p*, *results='cdf'*)

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Calculates the Edgeworth approximation to the pdf, cdf and sf, support $k \in \{0, \cdots n\}$.

`ctx.`**`binomial_ecf_inv`**(*q*, *n*, *p*, *results='qtf'*)

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Calculates the Cornish-Fisher approximation to the qtf and isf.

`ctx.`**`binomial_spa`**(*k*, *n*, *p*, *results='cdf'*)

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Calculates the Luggannini-Rice saddlepoint approximation of the pdf, cdf and sf.

The saddlepoint is given by

$$\hat{s}(x) = \log\left(\frac{kQ}{(n-k)P}\right).$$

`ctx.`**`binomial_spa_inv`**(*q*, *n*, *p*, *results='qtf'*)

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Calculates the inverse Jensen saddlepoint approximation of the qtf and isf.

4.13.5 Boost: Negative binomial distribution

The following functions return the pmf, cdf, qtf or boost class of the negative binomial distribution with target for number of successful trials $r > 0$ and success probability $0 \leq p \leq 1$, and $0 \leq q \leq 1$.

See also Wikipedia [1183], MathWorld [828], BoostMath [83], Ehrhardt [295] (3.9.23).

`math53.negbinomial_pmf`(r, p, k)

Returns $\text{pmf}(x)$, the value of the probability mass function (*Pmf*) of the negative binomial distribution:

$$\text{pmf}(x) = \frac{\Gamma(k+r)}{k!\Gamma(r)} p^r (1-p)^k.$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("NegbinomPdf(x, a, b): ", NegbinomPdf(x, a, b))
>>> print ("dist_negbinomial(a, b).pdf(x): ", dist_negbinomial(a, b).pdf(x))
6.35635234625645256156156145613 56E+00
```

`math53.negbinomial_cdf`(r, p, k)

where `Ctx` is `Math53` or `CtxBoost`.

Returns $\text{cdf}(x)$, the value of the cumulative distribution function (*Cdf*) of the negative binomial distribution:

$$\text{cdf}(x) = \sum_{j=0}^{k} \text{pmf}_X(j) = \text{ibeta}(r, k+1, p).$$

Here $\text{ibeta}(\cdot)$ denotes the real normalised incomplete beta function (*RealIBeta*).

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("NegbinomCdf(x, a, b): ", NegbinomCdf(x, a, b))
>>> print ("dist_negbinomial(a, b).cdf(x): ", dist_negbinomial(a, b).cdf(x))
6.35635234625645256156156145613 56E+00
```

`math53.negbinomial_qtf`(r, p, q)

Returns $\text{qtf}(q)$, the value of the quantile function (*Qtf*) of the negative binomial distribution:

$$\text{qtf}(q) = \text{ibeta_invb}(r, p, q) - 1.$$

Here $\text{ibeta_invb}(\cdot)$ denotes the inverse (on parameter b) of the real normalised incomplete beta function (*RealIBetaInvb*).

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("NegbinomQtf(q, a, b): ", NegbinomQtf(q, a, b))
>>> print ("dist_negbinomial(a, b).qtf(q): ", dist_negbinomial(a, b).qtf(q))
6.35635234625645256156156145613 56E+00
```

class ctx.**dist_negbinom**(r, p)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The negative binomial distribution is a discrete (lattice) probability distribution with target for number of successful trials $r > 0$ and success probability $0 \leq p \leq 1$. See also Wikipedia [1183], MathWorld [828], BoostMath [83] , and Witkovský [1482], R (Statistical System) [531].

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.nbdtr.html#scipy.special.nbdtr

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.nbdtrc.html#scipy.special.nbdtrc

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.nbdtri.html#scipy.special.nbdtri

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.nbdtrik.html#scipy.special.nbdtrik

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.nbdtrin.html#scipy.special.nbdtrin

dist_negbinom.**pmf**(x)

Returns $\text{pmf}_X(x)$, the probability mass function (pmf) of a random variable X, following an negative binomial distribution:

$$\text{pmf}_X(x) = \frac{\Gamma(n+k)}{K!\Gamma(n)} P^n (1-P)^k.$$

and $f_{\text{Beta}}(\cdot)$ and $F_{\text{Beta}}(\cdot)$ denote the PDF and CDF, respectively, of the central beta distribution. The following recursions are used for the PMF:

$$\Pr(X = k+1|n) = \frac{(n+k)(1-P)}{(k+1)} \Pr(X = k|n)$$

$$\Pr(X = k-1|n) = \frac{k}{(n-k+1)(1-P)} \Pr(X = k|n)$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pmf: ", negative_binomial(mu, sigma).pmf(x))
6.35635234625645256156156145613 56E-20
```

dist_negbinom.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following an negative binomial distribution:

$$\text{cdf}_X(x) = \sum_{j=0}^{k} \text{pmf}_X(j) = F_{\text{Beta}}(1-p; r, k+1).$$

and $f_{\text{Beta}}(\cdot)$ and $F_{\text{Beta}}(\cdot)$ denote the PDF and CDF, respectively, of the central beta distribution.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", negative_binomial(mu, sigma).pmf(x))
6.35635234625645256156156145613 56E-20
```

dist_negbinom.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following an negative binomial distribution:

$$\mathrm{sf}_X(x) = 1 - \mathrm{cdf}_X(x).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", negative_binomial(mu, sigma).pmf(x))
sf: 6.3563523462564525615615615614561356E-20
```

dist_negbinom.**qtf**(q)

Returns $\mathrm{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following an negative binomial distribution:

$$\mathrm{qtf}_X(q) = a - b \ln\left((1-y)/y\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", negative_binomial(mu, sigma).qtf(q))
qtf: 6.3563523462564525615615615614561356E+00
```

dist_negbinom.**isf**(q)

Returns $\mathrm{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following an negative binomial distribution:

$$\mathrm{isf}_X(q) = \mathrm{qtf}_X(1-q) = \mathrm{cdf}_X^{-1}(1-q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", negative_binomial(mu, sigma).isf(q))
6.3563523462564525615615615614561356E+00
```

dist_negbinom.**g_x**(t)

Returns $G_X(t)$, the probability generating function of a random variable X, following an negative binomial distribution:

$$G_X(t) = \left(\frac{1}{P} - \frac{1-P}{P}t\right)^{-n}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", negative_binomial(mu, sigma).c_x(t))
6.3563523462564525615615615614561356E+00
```

dist_negbinom.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following an negative binomial distribution:

$$C_X(t) = \left(\frac{1}{P} - \frac{1-P}{P}e^{it}\right)^{-n}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", negative_binomial(mu, sigma).c_x(t))
6.356352346256452561561561561456 1356E+00
```

dist_negbinom.**m_x**(*t*)

Returns $M_X(t)$, the moment generating function of a random variable X, following an negative binomial distribution:

$$M_X(t) = \left(\frac{1}{P} - \frac{1-P}{P}e^t\right)^{-n}.$$

$$L_X(t) = \left(\frac{1}{P} - \frac{1-P}{P}e^t\right)^{-n}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("m_x: ", negative_binomial(mu, sigma).c_x(t))
6.356352346256452561561561561456 1356E+00
```

dist_negbinom.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following an negative binomial distribution:

$$K_X(t) = -n \log\left(\frac{1}{P} - \frac{1-P}{P}e^t\right).$$

$K_X(t)$, the cumulant generating function, and its j^{th} derivatives, $K_X^{(j)}(t), j = 1 \ldots k$, of a random variable X, following a negative binomial distribution, are defined as

$$K_X(t) = r \log\left(\frac{1-p}{1-p\cdot e^t}\right), \quad \text{for } t < -\log(p)$$

$$K_X^{(1)}(t) = \frac{p\cdot r\cdot e^x}{1-p\cdot e^x},$$

$$K_X^{(2)}(t) = \frac{p\cdot r\cdot e^x}{(1-p\cdot e^x)^2},$$

$$K_X^{(3)}(t) = \frac{p\cdot r\cdot e^x(p\cdot e^x+1)}{(1-p\cdot e^x)^3},$$

and for $j \geq 4$ the derivatives are calculated by numerically differentiating $K_X^{(3)}(t)$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", negative_binomial(mu, sigma).k_x(t, k))
6.356352346256452561561561561456 1356E+00
```

dist_negbinom.**moments**(k)

Returns the first j central moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following an negative binomial distribution (Wikipedia). The raw moments are calculated from the central moments.

$$\mu_X(r) = \mu_2 \sum_{i=0}^{r-2} \binom{r-1}{i} \mu_i - \frac{1-P}{P} \sum_{i=0}^{r-2} \binom{r-1}{i} \mu_{i+1}, \quad r > 2; \quad \mu_1 = n\frac{1-P}{P}, \quad \mu_2 = \frac{\mu_1}{P}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", negative_binomial(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_negbinom.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following an negative binomial distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", negative_binomial(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

Approximations

ctx.**negbinom_ecf**(k, r, p, *results='cdf'*)

where ctx is ipm, dec, mpm, or gmp.

Calculates the Edgeworth approximation to the pdf, cdf and sf

ctx.**negbinom_ecf_inv**(q, r, p, *results='qtf'*)

where ctx is ipm, dec, mpm, or gmp.

Calculates the Cornish-Fisher approximation to the qtf and isf.

ctx.**negbinom_spa**(k, r, p, *results='c'*)

where ctx is ipm, dec, mpm, or gmp.

Calculates the Luggannini-Rice saddlepoint approximation of the pdf, cdf and sf.

The saddlepoint is given by:

$$\hat{s}(x) = \log\left(\frac{k(1-P)}{(n-k)P}\right).$$

ctx.**negbinom_spa_inv**(q, r, p, *results='qtf'*)

where ctx is ipm, dec, mpm, or gmp.

Calculates the inverse Jensen saddlepoint approximation of the qtf and isf.

4.13.6 Boost: Classical hypergeometric distribution

The following functions return pmf, cdf, qtf or boost class of the hypergeometric distribution, with k successes (random draws for which the object drawn has a specified feature) in $n \in \{0, 1, 2, \ldots, N\}$ draws, without replacement, from a finite population of size $N \in \{0, 1, 2, \ldots\}$‘ that contains exactly $K \in \{0, 1, 2, \ldots, N\}$ objects with that feature, wherein each draw is either a success or a failure, and the support interval $(\max(0, n + K - N), \min(K, n))$, and $0 \leq q \leq 1$.

See also Wikipedia [1174], MathWorld [820], BoostMath [78], Team [530], Berkopec [31], Johnson *et al.* [387] page 251, Ehrhardt [295] (3.9.11).

`math53.`**`hypergeometric_pmf`**(r, n, N, k)

Returns pmf(k), the value of the probability mass function (*Pmf*) of the hypergeometric distribution.

$$\text{pmf}_X(k) = \frac{\binom{K}{k}\binom{N-K}{n-k}}{\binom{N}{n}}.$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("HypergeoPdf(x, a, b): ", HypergeoPdf(x, a, b))
>>> print ("dist_hypergeometric(a, b).pdf(x): ", dist_hypergeometric(a, b).pdf(x))
6.35635234625645256156156145613 56E+00
```

`math53.`**`hypergeometric_cdf`**(r, n, N, k)

Returns cdf(x), the value of the cumulative distribution function (*Cdf*) of the hypergeometric distribution:

$$\text{cdf}_X(k) = \sum_{j=\max(0,n+K-N)}^{k} \text{pmf}_X(j).$$

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; x = 0.6;
>>> print ("HypergeoCdf(x, a, b): ", HypergeoCdf(x, a, b))
>>> print ("dist_hypergeometric(a, b).cdf(x): ", dist_hypergeometric(a, b).cdf(x))
6.35635234625645256156156145613 56E+00
```

`math53.`**`hypergeometric_qtf`**(r, n, N, q)

Returns qtf(q), the value of the quantile function (*Qtf*) of the hypergeometric distribution:

There is no known closed exact form for qtf(q) or isf(q).

The following example shows both forms of the syntax:

```
>>> from xlcalcnet import *
>>> a = 0; b = 1; t = 0.3; q = 0.6;
>>> print ("HypergeoQtf(q, a, b): ", HypergeoQtf(q, a, b))
>>> print ("dist_hypergeometric(a, b).qtf(q): ", dist_hypergeometric(a, b).qtf(q))
6.35635234625645256156156145613 56E+00
```

class ctx.**dist_hypergeometric**(n, K, N)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The hypergeometric distribution is a discrete (lattice) probability distribution with k successes (random draws for which the object drawn has a specified feature) in $n \in \{0, 1, 2, \ldots, N\}$ draws, without replacement, from a finite population of size $N \in \{0, 1, 2, \ldots\}$‘ that contains exactly $K \in \{0, 1, 2, \ldots, N\}$ objects with that feature, wherein each draw is either a success or a failure, and the support interval $(\max(0, n+K-N), \min(K, n))$. See also Wikipedia [1174], MathWorld [820], BoostMath [78], R (Statistical System) [530], Berkopec [31], Johnson *et al.* [387] page 251.

dist_hypergeometric.**pmf**(x)

Returns $\text{pmf}_X(x)$, the probability mass function (pmf) of a random variable X, following an hypergeometric distribution:

$$\text{pmf}_X(x) = \binom{K}{k}\binom{N-K}{n-k}\Big/\binom{N}{n}.$$

The following recursions are used for the PMF:

$$f(k+1) = \frac{(n_1-k)(n-k)}{(k+1)(n_2-n+k+1}f(k)$$

$$f(k-1) = \frac{k(n_2-n+k)}{(n_1-k+1)(n-k+1}f(k)$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pmf: ", hypergeometric(mu, sigma).pmf(x))
6.3563523462564525615615615614561356E-20
```

dist_hypergeometric.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following an hypergeometric distribution:

$$\text{cdf}_X(k) = \sum_{j=\max(0,n+K-N)}^{k} \text{pmf}_X(j) = 1 - \text{pmf}_X(k+1) \times {}_3F_2(1, k+1-K, k+1-n; k+2, N+k+2-K-n; 1),$$

where ${}_3F_2(\cdot)$ is a generalized hypergeometric function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", hypergeometric(mu, sigma).pmf(x))
6.3563523462564525615615615614561356E-20
```

dist_hypergeometric.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function (sf) of a random variable X, following an hypergeometric distribution:

$$\text{sf}_X(k) = \sum_{j=k+1}^{\min(K,n)} \text{pmf}_X(j) = \text{pmf}_X(k+1) \times {}_3F_2(1, k+1-K, k+1-n; k+2, N+k+2-K-n; 1),$$

where ${}_3F_2(\cdot)$ is a generalized hypergeometric function.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", hypergeometric(mu, sigma).pmf(x))
sf: 6.35635234625645256156156145613 56E-20
```

dist_hypergeometric.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following an hypergeometric distribution.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", hypergeometric(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_hypergeometric.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following an hypergeometric distribution:

$$\text{isf}_X(q) = \text{qtf}_X(1-q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", hypergeometric(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_hypergeometric.**g_x**(t)

Returns $G_X(t)$, the probability generating function of a random variable X, following an hypergeometric distribution:

$$G_X(t) = {}_2F_1(-n, -K; N-K-n+1; t)\binom{N-K}{n} \Big/ \binom{N}{n}.$$

where ${}_2F_1(\cdot)$ is the Gauss hypergeometric function (see *hyp2f1()*.)

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", hypergeometric(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_hypergeometric.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following an hypergeometric distribution:

$$C_X(t) = {}_2F_1(-n, -K; N-K-n+1; e^{it})\binom{N-K}{n} \Big/ \binom{N}{n}.$$

where ${}_2F_1(\cdot)$ is the Gauss hypergeometric function (see *hyp2f1()*.)

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", hypergeometric(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_hypergeometric.**m_x**(*t*)

Returns $M_X(t)$, the moment generating function of a random variable X, following an hypergeometric distribution:

$$M_X(t) = {}_2F_1(-n, -K; N-K-n+1; e^t)\binom{N-K}{n}\Big/\binom{N}{n}.$$

$$L_X(t) = {}_2F_1(-n, -K; N-K-n+1; e^{-t})\binom{N-K}{n}\Big/\binom{N}{n}.$$

where ${}_2F_1(\cdot)$ is the Gauss hypergeometric function (see *hyp2f1()*.)

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("m_x: ", hypergeometric(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_hypergeometric.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following an hypergeometric distribution:

$$K_X(t) = \log\left[({}_2F_1(-n, -K; N-K-n+1; e^t)\binom{N-K}{n}\Big/\binom{N}{n}\right].$$

where ${}_2F_1(\cdot)$ is the Gauss hypergeometric function (see *hyp2f1()*.)

$K_X(t)$, the cumulant generating function, and its j^{th} derivatives, $K_X^{(j)}(t), j = 1 \ldots k$, of a random variable X, following a hypergeometric distribution, are defined as

$$K_X(t) = \log\left(T \cdot {}_2F_1(a, b; c; e^t)\right), \quad \text{where } a = -n, b = -K, c = N-K-n+1, T = \binom{N-K}{n}\Big/\binom{N}{n}.$$

$$K_X^{(1)}(t) = \frac{a \cdot b \cdot e^x \cdot G_1(x)}{c \cdot G_0(x)}, \quad \text{where } G_i(x) = {}_2F_1(a+i, b+i; c+i; e^t),$$

$$K_X^{(2)}(t) = -\frac{a^2 \cdot b^2 \cdot e^{2x} \cdot (G_1(x))^2}{c^2 \cdot (G_0(x))^2} + \frac{a \cdot b \cdot e^x \cdot G_1(x)}{c \cdot G_0(x)} + \frac{a(a+1) \cdot b(b+1) \cdot e^{2x} \cdot G_2(x)}{c(c+1) \cdot G_0(x)},$$

$$K_X^{(3)}(t) = \frac{2a^3 \cdot b^3 \cdot e^{3x} \cdot (G_1(x))^3}{c^3 \cdot (G_0(x))^3} - \frac{3a^2 \cdot b^2 \cdot e^{2x} \cdot (G_1(x))^2}{c^2 \cdot (G_0(x))^2} - \frac{3a^2(a+1) \cdot b^2(b+1) \cdot e^{3x} \cdot G_2(x) \cdot G_1(x)}{c(c+1) \cdot G_0(x)}$$
$$+ \frac{a \cdot b \cdot e^x \cdot G_1(x)}{c \cdot G_0(x)} + \frac{3a(a+1) \cdot b(b+1) \cdot e^{2x} \cdot G_2(x)}{c(c+1) \cdot G_0(x)} + \frac{a(a+1)(a+2) \cdot b(b+1)(b+2) \cdot e^{3x} \cdot G_3(x)}{c(c+1)(c+2) \cdot G_0(x)}$$

and for $j \geq 4$ the derivatives are calculated by numerically differentiating $K_X^{(3)}(t)$. We also have

$$\frac{\mathrm{d}}{\mathrm{d}z}\left({}_2F_1(a, b, c; z)\right) = \frac{ab}{c} \cdot {}_2F_1(a+1, b+1, c+1; z), \quad \text{and}$$

$$z(1-z) \cdot \frac{\mathrm{d}^2}{\mathrm{d}z^2}\left({}_2F_1(a, b, c; z)\right) + (c - (a+b+1)z) \cdot \frac{\mathrm{d}}{\mathrm{d}z}\left({}_2F_1(a, b, c; z)\right) - ab \cdot {}_2F_1(a, b, c; z) = 0.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", hypergeometric(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

dist_hypergeometric.**moments**(k)

Returns the first j raw moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following an hypergeometric distribution (Wikipedia).

$$\mu'_X(r) = \sum_{j=1}^{j_{\max}} S_{r,j} T_j, \quad \text{where } j_{\max} = \min(r, n, M, N),$$

$$S_{r,1} = S_{r,r} = 1, \quad S_{r+1,j} = jS_{r,j} + S_{r,j-1}, \quad \text{and}$$

$$T_1 = nM/N, \quad T_{j+1} = T_j(n-j)(M-j)/(N-j).$$

$$\mu'_{[r]} = \frac{n!K!(K+(N-K)-r)!}{(n-r)!(K-r)!(K+(N-K))!}$$

$$\mu'_{[r]} = \frac{n!K!(N-r)!}{(n-r)!(K-r)!N!}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", hypergeometric(mu, sigma).moments(k))
6.35635234625645256156156145614356E+00
```

dist_hypergeometric.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following an hypergeometric distribution. The cumulants are calculated from the moments.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", hypergeometric(mu, sigma).cumulants(k))
6.35635234625645256156156145614356E+00
```

Approximations

ctx.**hypergeo_ecf**(k, n, K, N, *results='cdf'*)

where ctx is ipm, dec, mpm, or gmp.

Calculates the Edgeworth approximation to the pdf, cdf and sf.

ctx.**hypergeo_ecf_inv**(q, n, K, N, *results='qtf'*)

where ctx is ipm, dec, mpm, or gmp.

Calculates the Cornish-Fisher approximation to the qtf and isf.

ctx.**hypergeo_spa**(k, n, K, N, *results='cdf'*)

where ctx is ipm, dec, mpm, or gmp.

Calculates the Luggannini-Rice saddlepoint approximation of the pdf, cdf and sf.

ctx.**hypergeo_spa_inv**(q, n, K, N, *results='qtf'*)

where ctx is ipm, dec, mpm, or gmp.

Calculates the inverse Jensen saddlepoint approximation of the qtf and isf.

4.14 Discrete (lattice) distributions related to (stratified) rank tests

4.14.1 Wilcoxon signed rank T distribution, continuous data

class ctx.**dist_wilcoxon**(N)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The distribution of Wilcoxon's signed rank test is a discrete (lattice) probability distribution with sample size $N > 2$ and the support interval $(0, N(N+1))$. See also Wikipedia [1190], R (Statistical System) [527], Fellingham and Stoker [298], vandeWiel [785], Bennett [29] and Zimmermann [1494].

We consider N continuously distributed random variables $D_i, i = 1 \ldots N$, with common pdf h_0. In a sample $(d_1, \ldots, d_N)$ of size N let r_i be the rank of d_i in the ordered sample.

The test criterion of Wilcoxon's Signed Rank is $T_N = \sum_{i=1}^{N} S(d_i) r_i$, where $S(d_i) = 1$ for $x > 0$ and $S(d_i) = 0$ for $x < 0$. T_N can assume values between 0 and $\frac{1}{2}N(N+1)$ in steps of 1.

dist_wilcoxon.**pmf**(x)

Returns $\mathrm{pmf}_X(k)$, the probability mass function (pmf) of a random variable X, following the distribution of Wilcoxon's signed rank test, with sample size $N > 2$ and the support interval $(0, N(N+1)/2)$.

$$\mathrm{pmf}_X(x) = \sum_{j=x}^{N(N+1)/2} (-1)^{x+j} \binom{j}{x} \frac{\mu'_{[j]}}{j!},$$

where $\mu'_{[j]}$ is the j^{th} factorial moment.

The factorial moments are calculated from the cumulants (see *factorial_moments_from_cumulants()*).

The pmf can also be calculated from the characteristic function $C_X(t)$:

$$\mathrm{pmf}(x) = \frac{1}{\pi} \int_0^{\pi} \Re\left(e^{-itx} C_X(t)\right) \mathrm{d}t,$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pmf: ", wilcoxon_continuous(mu, sigma).pmf(x))
6.35635234625645256156156145561356E-20
```

dist_wilcoxon.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a Wilcoxon signed rank T distribution.

$$\mathrm{cdf}_X(x) = \sum_{j=x}^{N(N+1)/2} (-1)^{x+j} \binom{j-1}{x-1} \frac{\mu'_{[j]}}{j!},$$

where $\mu'_{[j]}$ is the j^{th} factorial moment.

The cdf can also be calculated from the characteristic function $C_X(t)$:

$$\mathrm{cdf}(x) = \frac{1}{\pi} \int_0^{\pi} \Re\left(C_X(t) \sum_{z=0}^{x} e^{-itz}\right) \mathrm{d}t.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", wilcoxon_continuous(mu, sigma).pmf(x))
6.35635234625645256156156145613 56E-20
```

dist_wilcoxon.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following a Wilcoxon signed rank T distribution:

$$\mathrm{sf}_X(x) = 1 - \sum_{j=x}^{N(N+1)/2} (-1)^{x+j} \binom{j-1}{x-1} \frac{\mu'_{[j]}}{j!},$$

where $\mu'_{[j]}$ is the j^{th} factorial moment.

The cdf can also be calculated from the characteristic function $C_X(t)$:

$$\mathrm{sf}(x) = 1 - \mathrm{cdf}(x) = \frac{1}{\pi} \int_0^{\pi} \Re \left(C_X(t) \sum_{z=x+1}^{N(N+1)/2} e^{-itz} \right) \mathrm{d}t.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", wilcoxon_continuous(mu, sigma).pmf(x))
sf: 6.35635234625645256156156145613 56E-20
```

dist_wilcoxon.**qtf**(q)

Returns $\mathrm{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following a Wilcoxon signed rank T distribution. There is no closed form for the qtf: It is computed using the Brent algorithm with starting values from a Cornish-Fisher or Jensen approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", wilcoxon_continuous(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_wilcoxon.**isf**(q)

Returns $\mathrm{isf}_X(x)$, the inverse survival function (isf) of a random variable X, following a Wilcoxon signed rank T distribution. There is no closed form for the isf: It is computed using the Brent algorithm with starting values from a Cornish-Fisher or Jensen approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", wilcoxon_continuous(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_wilcoxon.**g_x**(*t*)

Returns $G_X(x)$, the probability generating function of a random variable X, following a Wilcoxon signed rank T distribution:

$$G_X(x) = \frac{1}{2^N} \prod_{h=1}^{N} (1 + x^h)$$

See also: v.d.Wiel, p. 17, equ. 2.15

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", wilcoxon_continuous(mu, sigma).c_x(t))
6.356352346256452561561561561456 1356E+00
```

dist_wilcoxon.**c_x**(*t*)

Returns $C_X(t)$, the characteristic function of a random variable X, following a Wilcoxon signed rank T distribution:

$$C_X(t) = \exp\left(\tfrac{1}{4}N(N+1)it\right) \prod_{h=1}^{N} \cosh\left(\tfrac{h}{2}it\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", wilcoxon_continuous(mu, sigma).c_x(t))
6.356352346256452561561561561456 1356E+00
```

dist_wilcoxon.**m_x**(*t*)

Returns $M_X(t)$, the moment generating function of a random variable X, following a Wilcoxon signed rank T distribution:

$$M_X(t) = \exp\left(\tfrac{1}{4}N(N+1)t\right) \prod_{h=1}^{N} \cosh\left(\tfrac{h}{2}t\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("m_x: ", wilcoxon_continuous(mu, sigma).c_x(t))
6.356352346256452561561561561456 1356E+00
```

dist_wilcoxon.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following a Wilcoxon signed rank T distribution:

$$K_X(t) = \tfrac{1}{4}N(N+1)t + \sum_{h=1}^{N} \log\left(\cosh\left(\tfrac{h}{2}t\right)\right).$$

Returns $K_X(t)$, the cumulant generating function of a random variable X, following a Wilcoxon signed rank T distribution:

$$K_X(t) = \tfrac{1}{2}n\log(4p(1-p)) + \tfrac{1}{4}n(n+1)t + \sum_{h=1}^{n} \log\left(\cosh\left(\tfrac{1}{2}(\log(p/(1-p)) + h\cdot t)\right)\right).$$

$K_X(t)$, the cumulant generating function, and its j^{th} derivatives, $K_X^{(j)}(t), j = 1\ldots k$, of a random variable X, following a Wilcoxon signed rank T distribution, are defined as:

$$K_X(t) = \tfrac{1}{4}n(n+1)t + \sum_{h=1}^{n} \log\left(\cosh\left(\tfrac{h}{2}t\right)\right),$$

$$K_X^{(1)}(t) = \sum_{h=1}^{n} \frac{h}{2}\left(1 - \frac{2}{\exp(h\cdot s)+1}\right),$$

See also `Bennett1` in `DistCiornishArb.vb`.

$$K_X^{(j)}(t) = \sum_{h=1}^{n} h^j \cdot \sum_{k=1}^{j} c(j-2,k)\left(\exp(h\cdot s)+1\right)^{-k}, \quad j \geq 2.$$

where the coefficients $c(i,j)$ are calculated recursively, with $c(0,1) = c(0,2) = c(i,1) = 1$, and

$$c(i,j) = (j-1)\cdot c(i-1,j-1) + j\cdot c(i-1,j), \quad j \geq 2.$$

The saddlepoint s is determined numerically using Newton iterations, with a starting value of $s = 0$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", wilcoxon_continuous(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

dist_wilcoxon.**moments**(*k*)

Returns the first j moments, $\mu_j, j = 1\ldots k$, of a random variable X, following a Wilcoxon signed rank T distribution. The moments are calculated from the cumulants.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", wilcoxon_continuous(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_wilcoxon.**cumulants**(*k*)

Returns the first j cumulants, $\kappa_j, j = 1\ldots k$, of a random variable X, following a Wilcoxon signed rank T distribution. The cumulants of W are given by:

$$\kappa_{2j} = \frac{2^{2j}(2^{2j}-1)B_{2j}}{2j}\sum_{i=1}^{N} r_i^{2j} = \frac{2^{2j}(2^{2j}-1)B_{2j}}{2j}\frac{B_{2j+1}(N+1) - B_{2j+1}}{2j+1},$$

where $\kappa_1 = N(N+1)/4$), $\kappa_{2j+1} = 0$ for $j \geq 1$, and B_{2j} and $B_{2j}(x)$ are the Bernoulli numbers and polynomials, respectively, of degree $2j$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", wilcoxon_continuous(mu, sigma).cumulants(k))
6.35635234625645256156156145614561356E+00
```

Approximations

`ctx.`**`wilcoxon_ft`**(*x*, *n*, *results='cdf'*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Calculates the pdf, cdf and sf from the characteristic function (see *pmf_from_cf_lattice()* and *cdf_from_cf_lattice()*).

`ctx.`**`wilcoxon_ecf`**(*x*, *f*, *rho*, *omega*)

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Calculates the Edgeworth approximation to the pdf, cdf and sf.

`ctx.`**`wilcoxon_ecf_inv`**(*q*, *f*, *rho*, *omega*)

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Calculates the Cornish-Fisher approximation to the qtf and isf.

`ctx.`**`wilcoxon_spa`**(*x*, *n*, *results='c'*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Calculates the Luggannini-Rice saddlepoint approximation of the pdf, cdf and sf.

The saddlepoint s is determined numerically using Newton iterations, with a starting value of $s = 0$.

`ctx.`**`wilcoxon_spa_inv`**(*q*, *n*, *results='qtf'*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Calculates the inverse Jensen saddlepoint approximation of the qtf and isf.

4.14.2 Noncentral Wilcoxon signed rank T distribution, Bennett alternatives

class ctx.**dist_bennett**(N)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The distribution of Wilcoxon's signed rank test is a discrete (lattice) probability distribution with sample size $N > 2$ and the support interval $(0, N(N+1))$. See also Wikipedia [1190], R (Statistical System) [527], Fellingham and Stoker [298], vandeWiel [785], Bennett [29] and Zimmermann [1494].

We consider N continuously distributed random variables $D_i, i = 1 \ldots N$, with common pdf h_0. In a sample $(d_1, \ldots, d_N)$ of size N let r_i be the rank of d_i in the ordered sample.

The test criterion of Wilcoxon's Signed Rank is $T_N = \sum_{i=1}^{N} S(d_i) r_i$, where $S(d_i) = 1$ for $x > 0$ and $S(d_i) = 0$ for $x < 0$. T_N can assume values between 0 and $\frac{1}{2}N(N+1)$ in steps of 1.

dist_bennett.**pmf**(x)

Returns $\mathrm{pmf}_X(x)$, the probability mass function (pmf) of a random variable X, following a Wilcoxon signed rank T distribution. The null distribution can be calculated as follows: Let $p_N(w)$ denote the probability $\Pr[W_N = w]$ in a sample of size N. Then the following recurrence relation holds (Zimmermann_1985_dependent) :

$$p_N(w) = \tfrac{1}{2}\left(p_{N-1}(w) + p_{N-1}(w-N)\right).$$

$$\mathrm{pmf}_X(x) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pmf: ", wilcoxon_continuous(mu, sigma).pmf(x))
6.35635234625645256156156145613 56E-20
```

dist_bennett.**cdf**(x)

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a Wilcoxon signed rank T distribution.

$$\mathrm{cdf}_X(x) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", wilcoxon_continuous(mu, sigma).pmf(x))
6.35635234625645256156156145613 56E-20
```

dist_bennett.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following a Wilcoxon signed rank T distribution:

$$\mathrm{sf}_X(x) = 1 - \mathrm{cdf}_X(x)$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", wilcoxon_continuous(mu, sigma).pmf(x))
sf: 6.35635234625645256156156145613 56E-20
```

dist_bennett.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following a Wilcoxon signed rank T distribution. There is no closed form for the qtf: It is computed with Newton iterations where the starting values are from Boost.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", wilcoxon_continuous(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145614356E+00
```

dist_bennett.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following a Wilcoxon signed rank T distribution:

$$\text{isf}_X(q) = \text{qtf}_X(1-q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", wilcoxon_continuous(mu, sigma).isf(q))
6.35635234625645256156156145614356E+00
```

dist_bennett.**g_x**(t)

Returns $G_X(t)$, the probability generating function of a random variable X, following a Wilcoxon signed rank T distribution:

$$G_X(t) = \prod_{h=1}^{n} \left(pt^h + (1-p)\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", wilcoxon_continuous(mu, sigma).c_x(t))
6.35635234625645256156156145614356E+00
```

dist_bennett.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following a Wilcoxon signed rank T distribution:

$$C_X(t) = \exp\left(\tfrac{1}{4}n(n+1)it\right) \prod_{h=1}^{n} \cosh\left(\tfrac{h}{2}it\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", wilcoxon_continuous(mu, sigma).c_x(t))
6.35635234625645256156156145614356E+00
```

dist_bennett.**m_x**(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following a Wilcoxon signed rank T distribution:

$$M_X(t) = (4p(1-p))^{\frac{1}{2}n} \exp\left(\tfrac{1}{4}n(n+1)t\right) \prod_{h=1}^{n} \cosh\left(\tfrac{1}{2}(\log(p/(1-p)) + h \cdot t)\right), \quad a =$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("m_x: ", wilcoxon_continuous(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_bennett.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following a Wilcoxon signed rank T distribution:

$$K_X(t) = \tfrac{1}{2}n\log(4p(1-p)) + \tfrac{1}{4}n(n+1)t + \sum_{h=1}^{n}\log\left(\cosh\left(\tfrac{1}{2}(\log(p/(1-p)) + h\cdot t)\right)\right).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", wilcoxon_continuous(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

dist_bennett.**moments**(*k*)

Returns the first j moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following a Wilcoxon signed rank T distribution (Wikipedia). The moments are calculated from the cumulants.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", wilcoxon_continuous(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_bennett.**cumulants**(*k*)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following a Wilcoxon signed rank T distribution. The cumulants of W are given by (Fellingham_1964) :

Central case:

$$\kappa_{2j}(W_N) = \frac{2^{2j}(2^{2j}-1)B_{2j}}{2j}\sum_{i=1}^{N} r_i^{2j} = \frac{2^{2j}(2^{2j}-1)B_{2j}}{2j}\,\frac{B_{2j+1}(N+1) - B_{2j+1}}{2j+1}, \quad \text{and}$$

$$\kappa_{2j+1}(W_N) = 0, \quad \text{for } j \geq 0.$$

Noncentral case:

$$\kappa_1 = \tfrac{1}{4}n(n+1)(1+\tanh(0.5a)) = \tfrac{1}{2}n(n+1)p$$

$$\kappa_2 = \tfrac{1}{6}n(n+1)(2n+1)p(1-p)$$

$$\kappa_3 = \tfrac{1}{4}n^2(n+1)^2pq(q-p)$$

$$\kappa_4 = \tfrac{1}{30}n(n+1)(2n+1)(3n^2+3n-1)pq(1-6pq)$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", wilcoxon_continuous(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

4.14.3 Mann-Whitney U distribution, continuous data

class ctx.**dist_mann_whitney_u**(*N1*, *N2*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The distribution of Mann-Whitney's U is a discrete (lattice) probability distribution with sample sizes $N_1 \geq 1$ and $N_2 \geq 1$ and the support interval $(0, N_1 \cdot N_2))$. See also Wikipedia [1180], R (Statistical System) [526], Murakami and Kamakura [418], vandeWiel [785], Robillard [480] and Zimmermann [1495].

Let $x_1, \ldots, x_{N_1}$ and $y1, \ldots, y_{N_2}$ be two sets of measurements, which we denote by X and Y. The test criterion U of the Mann-Whitney test is then

$$U = \sum_{j=1}^{N_1} \sum_{k=1}^{N_2} \operatorname{sgn}(x_k - y_k)$$

dist_mann_whitney_u.**pmf**(x)

Returns $\operatorname{pmf}_X(x)$, the probability mass function (pmf) of a random variable X, following a Mann-Whitney U distribution.

$$\operatorname{pmf}_X(x) = \sum_{j=x}^{N_1 \cdot N_2} (-1)^{x+j} \binom{j}{x} \frac{\mu'_{[j]}}{j!},$$

where $\mu'_{[j]}$ is the j^{th} factorial moment.

The factorial moments are calculated from the cumulants (see *factorial_moments_from_cumulants()*).

The pmf can also be calculated from the characteristic function $C_X(t)$:

$$\operatorname{pmf}(x) = \frac{1}{\pi} \int_0^{\pi} \Re\left(e^{-itx} C_X(t)\right) \mathrm{d}t,$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pmf: ", mann_whitney_u_continuous(mu, sigma).pmf(x))
6.35635234625645256156156145613 56E-20
```

dist_mann_whitney_u.**cdf**(x)

Returns $\operatorname{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a Mann-Whitney U distribution.

$$\operatorname{cdf}_X(x) = \sum_{j=x}^{N_1 \cdot N_2} (-1)^{x+j} \binom{j-1}{x-1} \frac{\mu'_{[j]}}{j!},$$

where $\mu'_{[j]}$ is the j^{th} factorial moment.

The cdf can also be calculated from the characteristic function $C_X(t)$:

$$\operatorname{cdf}(x) = \frac{1}{\pi} \int_0^{\pi} \Re\left(C_X(t) \sum_{z=0}^{x} e^{-itz}\right) \mathrm{d}t.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", mann_whitney_u_continuous(mu, sigma).pmf(x))
6.35635234625645256156156145613 56E-20
```

dist_mann_whitney_u.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following a Mann-Whitney U distribution:

$$\mathrm{sf}_X(x) = 1 - \sum_{j=x}^{N_1 \cdot N_2} (-1)^{x+j} \binom{j-1}{x-1} \frac{\mu'_{[j]}}{j!},$$

where $\mu'_{[j]}$ is the j^{th} factorial moment.

The cdf can also be calculated from the characteristic function $C_X(t)$:

$$\mathrm{sf}(x) = 1 - \mathrm{cdf}(x) = \frac{1}{\pi} \int_0^{\pi} \Re \left(C_X(t) \sum_{z=x+1}^{N_1 \cdot N_2} e^{-itz} \right) \mathrm{d}t.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", mann_whitney_u_continuous(mu, sigma).pmf(x))
sf: 6.356352346256452561561561561456135 6E-20
```

dist_mann_whitney_u.**qtf**(q)

Returns $\mathrm{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following a Mann-Whitney U distribution. There is no closed form for the qtf: It is computed using the Brent algorithm with starting values from a Cornish-Fisher or Jensen approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", mann_whitney_u_continuous(mu, sigma).qtf(q))
qtf: 6.356352346256452561561561561456135 6E+00
```

dist_mann_whitney_u.**isf**(q)

Returns $\mathrm{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following a Mann-Whitney U distribution. There is no closed form for the isf: It is computed using the Brent algorithm with starting values from a Cornish-Fisher or Jensen approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", mann_whitney_u_continuous(mu, sigma).isf(q))
6.356352346256452561561561561456135 6E+00
```

dist_mann_whitney_u.**g_x**(t)

Returns $G_X(t)$, the probability generating function of a random variable X, following a Mann-Whitney U distribution:

$$G_X(t) = \frac{1}{\binom{N_1+N_2}{N_1}} \frac{\prod_{r=N_1+1}^{N_1+N_2} (1-x^r)}{\prod_{r=1}^{N_2} (1-x^r)}.$$

See also: v.d.Wiel, p. 14, equ. 2.5

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", mann_whitney_u_continuous(mu, sigma).c_x(t))
6.356352346256452561561561561456135 6E+00
```

dist_mann_whitney_u.**c_x**(*t*)

Returns $C_X(t)$, the characteristic function of a random variable X, following a Mann-Whitney U distribution:

$$C_X(t) = \prod_{r=1}^{N_2} \frac{r}{N_2 + r} \frac{1 - \exp((N_2 + r)it)}{1 - \exp(itr)}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", mann_whitney_u_continuous(mu, sigma).c_x(t))
6.35635234625645256156156145613356E+00
```

dist_mann_whitney_u.**m_x**(*t*)

Returns $M_X(t)$, the moment generating function of a random variable X, following a Mann-Whitney U distribution:

$$M_X(t) = \prod_{r=1}^{N_2} \frac{r}{N_2 + r} \frac{1 - \exp((N_2 + r)t)}{1 - \exp(tr)}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("m_x: ", mann_whitney_u_continuous(mu, sigma).c_x(t))
6.35635234625645256156156145613356E+00
```

dist_mann_whitney_u.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following a Mann-Whitney U distribution:

$$K_X(t) = \sum_{r=1}^{N_2} \log\left(\frac{r}{N_2 + r} \frac{1 - \exp((N_2 + r)t)}{1 - \exp(tr)}\right).$$

$K_X(t)$, the cumulant generating function, and its j^{th} derivatives, $K_X^{(j)}(t), j = 1 \ldots k$, of a random variable X, following a Mann-Whitney U distribution, are defined as

$$K_X(t) = \sum_{r=1}^{m} \log\left(\frac{r}{n + r} \frac{1 - \exp((n + r)t)}{1 - \exp(t \cdot r)}\right),$$

$$K_X^{(1)}(s) = \sum_{r=1}^{m} \left(\frac{n + r}{1 - \exp((n + r)s)} - \frac{n(\exp(r \cdot s) + n + r)}{1 - \exp(r \cdot s)}\right),$$

See also `Murakami1_new` in `DistCiornishArb.vb`.

$$K_X^{(j)}(s) = (-1)^j \sum_{r=1}^{m} \sum_{i=0}^{1} (-1)^i \cdot t_i^j \cdot \sum_{k=1}^{j} c(j-2, k) \cdot z_i^j, \quad j \geq 2, \quad \text{where}$$

$$z_i = \frac{1}{1 - \exp(t_i \cdot s)}, \quad t_i = \begin{cases} n + r, & i = 0, \\ r & i = 1, \end{cases}$$

and the coefficients $c(i, j)$ are calculated recursively, with $c(0, 1) = c(0, 2) = c(i, 1) = 1$, and

$$c(i, j) = (j - 1) \cdot c(i - 1, j - 1) + j \cdot c(i - 1, j), \quad j \geq 2.$$

See also `Murakami2_deriv2` in `DistCiornishArb.vb`.

The saddlepoint s is determined numerically using Newton iterations, with a starting value of $s = 0.1$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", mann_whitney_u_continuous(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

`dist_mann_whitney_u.`**`moments`**`(`k`)`

Returns the first j moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following a Mann-Whitney U distribution (Wikipedia). The moments are calculated from the cumulants.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", mann_whitney_u_continuous(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

`dist_mann_whitney_u.`**`cumulants`**`(`k`)`

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following a Mann-Whitney U distribution. The cumulants of U are given by (Robillard1972):

$$\begin{aligned}\kappa_{2j} &= \frac{B_{2j}}{2j}\left[\sum_{s=N_1+1}^{N_1+N_2} s^{2j} - \sum_{s=1}^{N_2} s^{2j}\right] \\ &= \frac{B_{2j}}{2j(2j+1)}\left[B_{2j+1}(N_2+N_1+1) + B_{2j+1} - B_{2j+1}(N_1+1) - B_{2j+1}(N_2+1)\right]\end{aligned}$$

and $\kappa_{2j+1} = 0$, $j \geq 1$, and B_{2j} and $B_{2j}(x)$ are the Bernoulli numbers and polynomials, respectively, of degree $2j$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", mann_whitney_u_continuous(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

Approximations

`ctx.`**`mannwhitney_ft`**`(`x, n, *results='cdf'*`)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Calculates the pdf, cdf and sf from the characteristic function (see *pmf_from_cf_lattice()* and *cdf_from_cf_lattice()*).

`ctx.`**`mannwhitney_ecf`**`(`x, f, *rho*, *omega*`)`

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Calculates the Edgeworth approximation to the pdf, cdf and sf.

`ctx.`**`mannwhitney_ecf_inv`**`(`q, f, *rho*, *omega*`)`

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Calculates the Cornish-Fisher approximation to the qtf and isf.

ctx.**mannwhitney_spa**(*x*, *m*, *n*, *results='c'*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

Calculates the Luggannini-Rice saddlepoint approximation of the pdf, cdf and sf.

The saddlepoint s is determined numerically using Newton iterations, with a starting value of $s = 0.1$.

ctx.**mannwhitney_spa_inv**(*q*, *m*, *n*, *results='qtf'*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

Calculates the inverse Jensen saddlepoint approximation of the qtf and isf.

4.14.4 Noncentral Mann-Whitney U distribution, Lehmann alternatives

class ctx.**dist_mann_whitney_u_lehmann**(m, n)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The distribution of Mann-Whitney's U is a discrete (lattice) probability distribution with sample sizes $m \geq 1$ and $n \geq 1$ and the support interval $(0, nm))$. See also Wikipedia [1180], R (Statistical System) [526], Murakami and Kamakura [418], Robillard [480], vandeWiel [785] and Zimmermann [1495].

Let $x1, \ldots, x_m$ and $y1, \ldots, y_n$ be two sets of measurements, which we denote by X and Y. The test criterion U of the Mann-Whitney test is then

$$U = \sum_{i=1}^{m} \sum_{j=1}^{n} \text{sgn}(x_i - y_j)$$

dist_mann_whitney_u_lehmann.**pmf**(x)

Returns $\text{pmf}_X(x)$, the probability mass function (pmf) of a random variable X, following a Mann-Whitney U distribution under Lehmann alternatives.

$$\text{pmf}_X(x) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pmf: ", mann_whitney_u_continuous(mu, sigma).pmf(x))
6.35635234625645256156156145613 56E-20
```

dist_mann_whitney_u_lehmann.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a Mann-Whitney U distribution under Lehmann alternatives.

$$\text{cdf}_X(x) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", mann_whitney_u_continuous(mu, sigma).pmf(x))
6.35635234625645256156156145613 56E-20
```

dist_mann_whitney_u_lehmann.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function (sf) of a random variable X, following a Mann-Whitney U distribution under Lehmann alternatives:

$$\text{sf}_X(x) = 1 - \text{cdf}_X(x)$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", mann_whitney_u_continuous(mu, sigma).pmf(x))
sf: 6.35635234625645256156156145613 56E-20
```

dist_mann_whitney_u_lehmann.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following a Mann-Whitney U distribution under Lehmann alternatives. There is no closed form for the qtf: It is computed with Newton iterations where the starting values are from Boost.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", mann_whitney_u_continuous(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145614356E+00
```

dist_mann_whitney_u_lehmann.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following a Mann-Whitney U distribution under Lehmann alternatives:

$$\text{isf}_X(q) = \text{qtf}_X(1-q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", mann_whitney_u_continuous(mu, sigma).isf(q))
6.35635234625645256156156145614356E+00
```

dist_mann_whitney_u_normal.**g_x**(t)

Returns $G_X(t)$, the probability generating function of a random variable X, following a Mann-Whitney U distribution under Lehmann alternatives:

$$G_X(t) = ??$$

dist_mann_whitney_u_lehmann.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following a Mann-Whitney U distribution under Lehmann alternatives:

$$C_X(t) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", mann_whitney_u_continuous(mu, sigma).c_x(t))
6.35635234625645256156156145614356E+00
```

dist_mann_whitney_u_lehmann.**m_x**(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following a Mann-Whitney U distribution under Lehmann alternatives:

$$M_X(t) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("m_x: ", mann_whitney_u_continuous(mu, sigma).c_x(t))
6.356352346256452561561561456135 6E+00
```

dist_mann_whitney_u_lehmann.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following a Mann-Whitney U distribution under Lehmann alternatives:

$$K_X(t) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", mann_whitney_u_continuous(mu, sigma).k_x(t, k))
6.356352346256452561561561456135 6E+00
```

dist_mann_whitney_u_lehmann.**moments**(*k*)

Returns the first j moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following a Mann-Whitney U distribution under Lehmann alternatives (Wikipedia). The moments are calculated from the cumulants.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", mann_whitney_u_continuous(mu, sigma).moments(k))
6.356352346256452561561561456135 6E+00
```

dist_mann_whitney_u_lehmann.**cumulants**(*k*)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following a Mann-Whitney U distribution under Lehmann alternatives.

kappa_{j} = ??

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", mann_whitney_u_continuous(mu, sigma).cumulants(k))
6.356352346256452561561561456135 6E+00
```

4.14.5 Noncentral Mann-Whitney U distribution, Milton alternatives

class ctx.**dist_mann_whitney_u_milton**(m, n)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The distribution of Mann-Whitney's U is a discrete (lattice) probability distribution with sample sizes $m \geq 1$ and $n \geq 1$ and the support interval $(0, nm))$. See also Wikipedia [1180], R (Statistical System) [526], Murakami and Kamakura [418], Robillard [480], vandeWiel [785] and Zimmermann [1495].

Let $x1, \ldots, x_m$ and $y1, \ldots, y_n$ be two sets of measurements, which we denote by X and Y. The test criterion U of the Mann-Whitney test is then

$$U = \sum_{i=1}^{m} \sum_{j=1}^{n} \text{sgn}(x_i - y_j)$$

dist_mann_whitney_u_milton.**pmf**(x)

Returns $\text{pmf}_X(x)$, the probability mass function (pmf) of a random variable X, following a Mann-Whitney U distribution under Milton alternatives.

$$\text{pmf}_X(x) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pmf: ", mann_whitney_u_continuous(mu, sigma).pmf(x))
6.3563523462564525615615615614561356E-20
```

dist_mann_whitney_u_milton.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a Mann-Whitney U distribution under Milton alternatives.

$$\text{cdf}_X(x) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", mann_whitney_u_continuous(mu, sigma).pmf(x))
6.3563523462564525615615615614561356E-20
```

dist_mann_whitney_u_milton.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function (sf) of a random variable X, following a Mann-Whitney U distribution under Milton alternatives:

$$\text{sf}_X(x) = 1 - \text{cdf}_X(x)$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", mann_whitney_u_continuous(mu, sigma).pmf(x))
sf: 6.3563523462564525615615615614561356E-20
```

dist_mann_whitney_u_milton.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following a Mann-Whitney U distribution under Milton alternatives. There is no closed form for the qtf: It is computed with Newton iterations where the starting values are from Boost.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", mann_whitney_u_continuous(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145614561356E+00
```

dist_mann_whitney_u_milton.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following a Mann-Whitney U distribution under Milton alternatives:

$$\text{isf}_X(q) = \text{qtf}_X(1-q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", mann_whitney_u_continuous(mu, sigma).isf(q))
6.35635234625645256156156145614561356E+00
```

dist_mann_whitney_u_milton.**g_x**(t)

Returns $G_X(t)$, the probability generating function of a random variable X, following a Mann-Whitney U distribution under Milton alternatives:

$$G_X(t) = ??$$

dist_mann_whitney_u_milton.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following a Mann-Whitney U distribution under Milton alternatives:

$$C_X(t) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", mann_whitney_u_continuous(mu, sigma).c_x(t))
6.35635234625645256156156145614561356E+00
```

dist_mann_whitney_u_milton.**m_x**(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following a Mann-Whitney U distribution under Milton alternatives:

$$M_X(t) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("m_x: ", mann_whitney_u_continuous(mu, sigma).c_x(t))
6.35635234625645256156156145613356E+00
```

dist_mann_whitney_u_milton.**k_x**(*t*, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following a Mann-Whitney U distribution under Milton alternatives:

$$K_X(t) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", mann_whitney_u_continuous(mu, sigma).k_x(t, k))
6.35635234625645256156156145613356E+00
```

dist_mann_whitney_u_milton.**moments**(*k*)

Returns the first j moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following a Mann-Whitney U distribution under Milton alternatives (Wikipedia). The moments are calculated from the cumulants.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", mann_whitney_u_continuous(mu, sigma).moments(k))
6.35635234625645256156156145613356E+00
```

dist_mann_whitney_u_milton.**cumulants**(*k*)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following a Mann-Whitney U distribution under Milton alternatives.

kappa_{j} = ??

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", mann_whitney_u_continuous(mu, sigma).cumulants(k))
6.35635234625645256156156145613356E+00
```

4.14.6 Kendall's tau distribution, continuous data

class ctx.**dist_kendall_tau**(*N*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The distribution of $K_N = \frac{1}{4}N(N-1)(1-\tau)$ is a discrete (lattice) probability distribution with sample size $N \geq 2$ and the support interval $(0, N(N-1)/2)$. See also Wikipedia [1177], Noether [422], vandeWiel [785], Robillard [480].

Let $(X_1, Y_1), ..., (X_N, Y_N)$ be a sample of N pairs of observations. The Kendall rank correlation coefficient τ is defined as

$$\tau = 1 - \frac{2K_N}{N(N-1)/2}$$

where K_N is the number of inversions: the number of pairs $\{(X_i, Y_i), (X_j, Y_j)\}$ such that $X_i < X_j$ and $Y_i > Y_j$ for $i < j$, where $i = 1, \ldots n-1$ and $j = 2, \ldots, n$. K_N can assume values between 0 and $N(N-1)/2$, whereas τ can assume values between -1 and $+1$.

dist_kendall_tau.**pmf**(*x*)

Returns $\text{pmf}_X(x)$, the probability mass function (pmf) of a random variable X, following the distribution of Kendall's K_N.

$$\text{pmf}_X(x) = \sum_{j=x}^{N(N-1)/2} (-1)^{x+j} \binom{j}{x} \frac{\mu'_{[j]}}{j!},$$

where $\mu'_{[j]}$ is the j^{th} factorial moment.

The factorial moments are calculated from the cumulants (see *factorial_moments_from_cumulants()*).

The pmf can also be calculated from the characteristic function $C_X(t)$:

$$\text{pmf}(x) = \frac{1}{\pi} \int_0^{\pi} \Re\left(e^{-itx} C_X(t)\right) \mathrm{d}t,$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pmf: ", kendall_tau_continuous(mu, sigma).pmf(x))
6.35635234625645256156156145613 56E-20
```

dist_kendall_tau.**cdf**(*x*)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following the distribution of Kendall's K_N:

$$\text{cdf}_X(x) = \sum_{j=x}^{N(N-1)/2} (-1)^{x+j} \binom{j-1}{x-1} \frac{\mu'_{[j]}}{j!},$$

where $\mu'_{[j]}$ is the j^{th} factorial moment.

The cdf can also be calculated from the characteristic function $C_X(t)$:

$$\text{cdf}(x) = \frac{1}{\pi} \int_0^{\pi} \Re\left(C_X(t) \sum_{z=0}^{x} e^{-itz}\right) \mathrm{d}t.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", kendall_tau_continuous(mu, sigma).pmf(x))
6.35635234625645256156156145613 56E-20
```

dist_kendall_tau.**sf**(x)

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following the distribution of Kendall's K_N:

$$\mathrm{sf}_X(x) = 1 - \sum_{j=x}^{N(N-1)/2} (-1)^{x+j} \binom{j-1}{x-1} \frac{\mu'_{[j]}}{j!},$$

where $\mu'_{[j]}$ is the j^{th} factorial moment.

The cdf can also be calculated from the characteristic function $C_X(t)$:

$$\mathrm{sf}(x) = 1 - \mathrm{cdf}(x) = \frac{1}{\pi} \int_0^{\pi} \Re \left(C_X(t) \sum_{z=x+1}^{N(N-1)/2} e^{-itz} \right) \mathrm{d}t.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", kendall_tau_continuous(mu, sigma).pmf(x))
sf: 6.35635234625645256156156145613 56E-20
```

dist_kendall_tau.**qtf**(q)

Returns $\mathrm{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following the distribution of Kendall's K_N. There is no closed form for the qtf: It is computed using the Brent algorithm with starting values from a Cornish-Fisher or Jensen approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", kendall_tau_continuous(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_kendall_tau.**isf**(q)

Returns $\mathrm{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following the distribution of Kendall's K_N. There is no closed form for the isf: It is computed using the Brent algorithm with starting values from a Cornish-Fisher or Jensen approximation

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", kendall_tau_continuous(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_kendall_tau.**g_x**(t)

Returns $G_X(t)$, the probability generating function of a random variable X, following the distribution of Kendall's K_N:

$$G_X(t) = \frac{1}{N!} \prod_{k=1}^{N} \frac{(t^k - 1)}{(t - 1)}.$$

See also: v.d.Wiel, p. 16, equ. 2.1

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", kendall_tau_continuous(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_kendall_tau.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following the distribution of Kendall's K_N:

$$C_X(t) = \frac{1}{N!} \prod_{k=1}^{N} \frac{\exp(it \cdot k) - 1}{\exp(it) - 1}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", kendall_tau_continuous(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_kendall_tau.**m_x**(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following the distribution of Kendall's K_N:

$$M_X(t) = \frac{1}{N!} \prod_{k=1}^{N} \frac{\exp(t \cdot k) - 1}{\exp(t) - 1}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("m_x: ", kendall_tau_continuous(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_kendall_tau.**k_x**(t, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following the distribution of Kendall's K_N:

$$K_X(t) = -\log(N!) + \sum_{k=1}^{N} \log\left(\frac{\exp(t \cdot k) - 1}{\exp(t) - 1}\right).$$

$K_X(t)$, the cumulant generating function, and its j^{th} derivatives, $K_X^{(j)}(t), j = 1 \ldots k$, of a random variable X, following a Kendall tau distribution, are defined as

$$K_X(t) = \sum_{j=2}^{k} \log\left(\frac{1}{N_j + 1} \frac{1 - \exp((N_j + 1)t)}{1 - \exp(t)}\right).$$

$$K_X^{(1)}(s) = \sum_{r=1}^{m} \left(\frac{n+r}{1-\exp((n+r)s)} - \frac{n(\exp(r\cdot s)+n+r)}{1-\exp(r\cdot s)} \right),$$

$$K_X^{(j)}(s) = (-1)^j \sum_{r=1}^{m} \sum_{i=0}^{1} (-1)^i \cdot t_i^j \cdot \sum_{k=1}^{j} c(j-2,k) \cdot z_i^j, \quad j \geq 2, \quad \text{where}$$

$$z_i = \frac{1}{1-\exp(t_i \cdot s)}, \quad t_i = \begin{cases} n+r, & i=0, \\ r & i=1, \end{cases}$$

and the coefficients $c(i,j)$ are calculated recursively, with $c(0,1) = c(0,2) = c(i,1) = 1$, and

$$c(i,j) = (j-1)\cdot c(i-1,j-1) + j \cdot c(i-1,j), \quad j \geq 2.$$

The saddlepoint s is determined numerically using Newton iterations, with a starting value of $s = 0.1$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", kendall_tau_continuous(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

`dist_kendall_tau.`**`moments`**`(`*`k`*`)`

Returns the first j moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following the distribution of Kendall's K_N (Wikipedia). The moments are calculated from the cumulants.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", kendall_tau_continuous(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

`dist_kendall_tau.`**`cumulants`**`(`*`k`*`)`

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following the distribution of Kendall's K_N. The cumulants of T_N are given by

$$\kappa_{2j}(T_N) = \frac{B_{2j}}{2j} \sum_{s=1}^{N} s^{2j} = \frac{B_{2j}}{2j} \left[\frac{B_{2j+1}(N+1) - B_{2j+1}}{2j+1} - N \right], \quad \text{and}$$

$$\kappa_{2j+1}(W_N) = 0, \quad \text{for } j \geq 1.$$

In particular, $\kappa_1(T_N) = N(N-1)/4$, and $\kappa_2(T_N) = N(N-1)(2N+5)/72$, and B_{2j} and $B_{2j}(x)$ are the Bernoulli numbers and polynomials, respectively, of degree $2j$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", kendall_tau_continuous(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

Approximations

`ctx.`**`kendall_ft`**`(`*`x`*`, `*`n`*`, `*`results='cdf'`*`)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Calculates the pdf, cdf and sf from the characteristic function (see *pmf_from_cf_lattice()* and *cdf_from_cf_lattice()*).

ctx.**kendall_tau_ecf**(*x*, *f*, *rho*, *omega*)

where ctx is ipm, dec, mpm, or gmp.

Calculates the Edgeworth approximation to the pdf.

ctx.**kendall_tau_ecf_inv**(*q*, *f*, *rho*, *omega*)

where ctx is ipm, dec, mpm, or gmp.

Calculates the Cornish-Fisher approximation to the qtf and isf.

ctx.**kendall_tau_spa**(*x*, *n*, *results='c'*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

Calculates the Luggannini-Rice saddlepoint approximation of the pdf, cdf and sf.

The saddlepoint s is determined numerically using Newton iterations, with a starting value of $s = 0.1$.

ctx.**kendall_tau_spa_inv**(*x*, *n*, *results='qtf'*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

Calculates the inverse Jensen saddlepoint approximation of the qtf and isf.

4.14.7 Jonckheere-Terpsta T distribution, continuous data

class ctx.**dist_jterpsta_s**(k, n)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The distribution of Jonckheere-Terpsta's T is a discrete (lattice) probability distribution with k samples of size $n_1 \geq 1, \ldots, n_k \geq 1$ and the support interval $[0, M]$). See also Wikipedia [1176], Murakami and Kamakura [418], vandeWiel [785], Robillard [480]. and Skillings [499].

Consider k independent groups X_i of sizes $n_i, i = 1 \ldots k$, and define $N_i = \sum_{j=1}^{i-1} n_j$ and $M = \sum_{i=2}^{k} n_i N_i$. The Jonckheere-Terpsta statistic is defined as

$$J_T = \sum_{i<j}^{c} U_{ij} = \sum_{i=1}^{c-1} \sum_{j=i+1}^{c} U_{ij}$$

where U_{ij} is Mann-Whitney's U calculated for groups X_i and X_j.

Let S_i denote the combined samples $X_1, ..., X_i$, and let T_i be the Mann-Whitney T statistic calculated for groups S_{i-1} and X_i, $i = 2...k$. Then $T = \sum_{i=2}^{k} T_i$ is related to J_T by $J_T = 2T - M$.

dist_jterpsta_s.**pmf**(x)

Returns $\text{pmf}_X(x)$, the probability mass function (pmf) of a random variable X, following a Jonckheere-Terpsta S distribution.

$$\text{pmf}_X(x) = \sum_{j=x}^{M} (-1)^{x+j} \binom{j}{x} \frac{\mu'_{[j]}}{j!},$$

where $\mu'_{[j]}$ is the j^{th} factorial moment.

The factorial moments are calculated from the cumulants (see *factorial_moments_from_cumulants()*).

The pmf can also be calculated from the characteristic function $C_X(t)$:

$$\text{pmf}(x) = \frac{1}{\pi} \int_0^{\pi} \Re \left(e^{-itx} C_X(t) \right) \mathrm{d}t,$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pmf: ", jonckheere_terpsta_s_continuous(mu, sigma).pmf(x))
6.35635234625645256156156145613 56E-20
```

dist_jterpsta_s.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a Jonckheere-Terpsta S distribution.

$$\text{cdf}_X(x) = \sum_{j=x}^{M} (-1)^{x+j} \binom{j-1}{x-1} \frac{\mu'_{[j]}}{j!},$$

where $\mu'_{[j]}$ is the j^{th} factorial moment.

The cdf can also be calculated from the characteristic function $C_X(t)$:

$$\text{cdf}(x) = \frac{1}{\pi} \int_0^{\pi} \Re \left(C_X(t) \sum_{z=0}^{x} e^{-itz} \right) \mathrm{d}t.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", jonckheere_terpsta_s_continuous(mu, sigma).pmf(x))
6.3563523462564525615615615614561356E-20
```

`dist_jterpsta_s.sf(`x`)`

Returns $\mathrm{sf}_X(x)$, the survival function (sf) of a random variable X, following a Jonckheere-Terpsta S distribution:

$$\mathrm{sf}_X(x) = 1 - \sum_{j=x}^{M} (-1)^{x+j} \binom{j-1}{x-1} \frac{\mu'_{[j]}}{j!},$$

where $\mu'_{[j]}$ is the j^{th} factorial moment.

The cdf can also be calculated from the characteristic function $C_X(t)$:

$$\mathrm{sf}(x) = 1 - \mathrm{cdf}(x) = \frac{1}{\pi} \int_0^{\pi} \Re \left(C_X(t) \sum_{z=x+1}^{M} e^{-itz} \right) \mathrm{d}t.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", jonckheere_terpsta_s_continuous(mu, sigma).pmf(x))
sf: 6.3563523462564525615615615614561356E-20
```

`dist_jterpsta_s.qtf(`q`)`

Returns $\mathrm{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following a Jonckheere-Terpsta S distribution. There is no closed form for the qtf: It is computed using the Brent algorithm with starting values from a Cornish-Fisher or Jensen approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", jonckheere_terpsta_s_continuous(mu, sigma).qtf(q))
qtf: 6.3563523462564525615615615614561356E+00
```

`dist_jterpsta_s.isf(`q`)`

Returns $\mathrm{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following a Jonckheere-Terpsta S distribution. There is no closed form for the isf: It is computed using the Brent algorithm with starting values from a Cornish-Fisher or Jensen approximation.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", jonckheere_terpsta_s_continuous(mu, sigma).isf(q))
6.3563523462564525615615615614561356E+00
```

`dist_jterpsta_s.g_x(`t`)`

Returns $G_X(t)$, the characteristic function of a random variable X, following a Jonckheere-Terpsta S distribution:

$$G_X(t) = \prod_{i=2}^{k} \frac{1}{\binom{n_i+N_i}{n_i}} \frac{\prod_{l=N_i+1}^{n_i+N_i}(1-x^l)}{\prod_{l=1}^{n_i}(1-x^l)}.$$

See also: v.d.Wiel, p. 15, equ. 2.9

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", jonckheere_terpsta_s_continuous(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

`dist_jterpsta_s.c_x(t)`

Returns $C_X(t)$, the characteristic function of a random variable X, following a Jonckheere-Terpsta S distribution:

$$C_X(t) = \prod_{j=2}^{k} \prod_{r=1}^{n_j} \frac{r}{N_j + r} \frac{1 - \exp((N_j + r)it)}{1 - \exp(itr)}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", jonckheere_terpsta_s_continuous(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

`dist_jterpsta_s.m_x(t)`

Returns $M_X(t)$, the moment generating function of a random variable X, following a Jonckheere-Terpsta S distribution:

$$M_X(t) = \prod_{j=2}^{k} \prod_{r=1}^{n_j} \frac{r}{N_j + r} \frac{1 - \exp((N_j + r)t)}{1 - \exp(tr)}.$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("m_x: ", jonckheere_terpsta_s_continuous(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

`dist_jterpsta_s.k_x(t, k=0)`

Returns $K_X(t)$, the cumulant generating function of a random variable X, following a Jonckheere-Terpsta S distribution:

$$K_X(t) = \sum_{j=2}^{k} \sum_{r=1}^{n_j} \log\left(\frac{r}{N_j + r} \frac{1 - \exp((N_j + r)t)}{1 - \exp(tr)}\right).$$

$K_X(t)$, the cumulant generating function, and its j^{th} derivatives, $K_X^{(j)}(t), j = 1 \ldots k$, of a random variable X, following a Jonckheere-Terpsta S distribution, are defined as

$$K_X(t) = \sum_{j=2}^{k} \sum_{r=1}^{n_j} \log\left(\frac{r}{N_j + r} \frac{1 - \exp((N_j + r)t)}{1 - \exp(tr)}\right).$$

$$K_X^{(1)}(s) = \sum_{r=1}^{m} \left(\frac{n + r}{1 - \exp((n + r)s)} - \frac{n(\exp(r \cdot s) + n + r)}{1 - \exp(r \cdot s)}\right),$$

$$K_X^{(j)}(s) = (-1)^j \sum_{r=1}^{m} \sum_{i=0}^{1} (-1)^i \cdot t_i^j \cdot \sum_{k=1}^{j} c(j-2, k) \cdot z_i^j, \quad j \geq 2, \quad \text{where}$$

$$z_i = \frac{1}{1-\exp(t_i \cdot s)}, \quad t_i = \begin{cases} n+r, & i=0, \\ r & i=1, \end{cases}$$

and the coefficients $c(i,j)$ are calculated recursively, with $c(0,1) = c(0,2) = c(i,1) = 1$, and

$$c(i,j) = (j-1) \cdot c(i-1,j-1) + j \cdot c(i-1,j), \quad j \geq 2.$$

The saddlepoint s is determined numerically using Newton iterations, with a starting value of $s = 0.1$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", jonckheere_terpsta_s_continuous(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

`dist_jterpsta_s.`**`moments`**`(`*k*`)`

Returns the first j moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following a Jonckheere-Terpsta S distribution (Wikipedia). The moments are calculated from the cumulants.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", jonckheere_terpsta_s_continuous(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

`dist_jterpsta_s.`**`cumulants`**`(`*k*`)`

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following a Jonckheere-Terpsta S distribution. The cumulants of J_N are given by (Robillard1972):

$$\begin{aligned} \kappa_{2j} &= \frac{B_{2j}}{2j}\left[\sum_{s=1}^{N} s^{2j} - \sum_{i=1}^{k}\sum_{s=1}^{n_i} s^{2j}\right] \\ &= \frac{B_{2j}}{2j(2j+1)}\left[B_{2j+1}(N+1) + (k-1)B_{2j+1} - \sum_{i=1}^{k} B_{2j+1}(n_i+1)\right] \end{aligned}$$

and $\kappa_{2j+1} = 0$, $j \geq 1$, and B_{2j} and $B_{2j}(x)$ are the Bernoulli numbers and polynomials, respectively, of degree $2j$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", jonckheere_terpsta_s_continuous(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

Approximations

`ctx.`**`jterpsta_ft`**`(`*x*, *n*, *results='cdf'*`)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Calculates the pdf, cdf and sf from the characteristic function (see *pmf_from_cf_lattice()* and *cdf_from_cf_lattice()*).

`ctx.`**`jterpsta_ecf`**`(`*x*, *f*, *rho*, *omega*`)`

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Calculates the Edgeworth approximation to the pdf, cdf and sf.

ctx.**jterpsta_ecf_inv**(*q*, *f*, *rho*, *omega*)

where ctx is ipm, dec, mpm, or gmp.

Calculates the Cornish-Fisher approximation to the qtf and isf.

ctx.**jterpsta_spa**(*x*, *n*, *results='c'*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

Calculates the Luggannini-Rice saddlepoint approximation of the pdf, cdf and sf.

The saddlepoint s is determined numerically using Newton iterations, with a starting value of $s = 0.1$.

ctx.**jterpsta_spa_inv**(*x*, *n*, *results='qtf'*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

Calculates the inverse Jensen saddlepoint approximation of the qtf and isf.

4.14.8 Generalized Page L distribution, continuous data

class ctx.**dist_page_l**(k, n)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The distribution of Page's L is a discrete (lattice) probability distribution with k samples of size $n_1 \geq 1, \ldots, n_k \geq 1$ and the support interval $(0, nm))$. See also Wikipedia [1176], Noether [422], vandeWiel [785] .

Consider k independent groups X_i of sizes $n_i, i = 1 \ldots k$. The Page L statistic is defined as

$$L = ??$$

dist_page_l.**pmf**(x)

Returns $\text{pmf}_X(x)$, the probability mass function (pmf) of a random variable X, following a generalized Page L distribution.

$$\text{pmf}_X(x) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pmf: ", page_l_continuous(mu, sigma).pmf(x))
6.35635234625645256156156145613 56E-20
```

dist_page_l.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a generalized Page L distribution.

$$\text{cdf}_X(x) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", page_l_continuous(mu, sigma).pmf(x))
6.35635234625645256156156145613 56E-20
```

dist_page_l.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function (sf) of a random variable X, following a generalized Page L distribution:

$$\text{sf}_X(x) = 1 - \text{cdf}_X(x)$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", page_l_continuous(mu, sigma).pmf(x))
sf: 6.35635234625645256156156145613 56E-20
```

dist_page_l.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following a generalized Page L distribution. There is no closed form for the qtf: It is computed with Newton iterations where the starting values are from Boost.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", page_l_continuous(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_page_l.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following a generalized Page L distribution:

$$\text{isf}_X(q) = \text{qtf}_X(1-q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", page_l_continuous(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_page_l.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following a generalized Page L distribution:

$$C_X(t) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", page_l_continuous(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_page_l.**m_x**(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following a generalized Page L distribution:

$$M_X(t) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("m_x: ", page_l_continuous(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_page_l.**k_x**(t, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following a generalized Page L distribution:

$$K_X(t) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", page_l_continuous(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

`dist_page_l.moments(k)`

Returns the first j moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following a generalized Page L distribution (Wikipedia). The moments are calculated from the cumulants.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", page_l_continuous(mu, sigma).moments(k))
6.356352346256452561561561456l356E+00
```

`dist_page_l.cumulants(k)`

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following a generalized Page L distribution. The cumulants of J_N are given by :

$$\kappa_{2j} = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", page_l_continuous(mu, sigma).cumulants(k))
6.356352346256452561561561456l356E+00
```

Approximations

`ctx.page_ecf(x, f, rho, omega)`

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Calculates the Edgeworth approximation to the pdf, cdf and sf.

For the Page L distribution, the cumulants are calculated from the pmf

`ctx.page_ecf_inv(q, f, rho, omega)`

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Calculates the Cornish-Fisher approximation to the qtf and isf.

For the Page L distribution, the cumulants are calculated from the pmf

`ctx.page_spa(x, n, results='c')`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Calculates the Luggannini-Rice saddlepoint approximation of the pdf, cdf and sf.

$K_X(t)$, the cumulant generating function, and its j^{th} derivatives, $K_X^{(j)}(t), j = 1 \ldots k$, of a random variable X, following a Jonckheere-Terpsta S distribution, are calculated from the pgf. The saddlepoint s is determined numerically using Newton iterations, with a starting value of $s = 0.1$.

`ctx.page_spa_inv(x, n, results='qtf')`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Calculates the inverse Jensen saddlepoint approximation of the qtf and isf.

4.14.9 Noncentral generalized Page L distribution, Milton alternatives

class ctx.**dist_page_l_nc_milton**(k, n)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The distribution of Page's L is a discrete (lattice) probability distribution with k samples of size $n_1 \geq 1, \ldots, n_k \geq 1$ and the support interval $(0, nm)$). See also Wikipedia [1176], Noether [422], vandeWiel [785] .

Consider k independent groups X_i of sizes $n_i, i = 1 \ldots k$. The Page L statistic is defined as

$$L = ??$$

dist_page_l_nc_milton.**pmf**(x)

Returns $\text{pmf}_X(x)$, the probability mass function (pmf) of a random variable X, following a Page L distribution under Milton alternatives.

$$\text{pmf}_X(x) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pmf: ", page_l_nc_milton_continuous(mu, sigma).pmf(x))
6.3563523462564525615615615614561356E-20
```

dist_page_l_nc_milton.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a Page L distribution under Milton alternatives.

$$\text{cdf}_X(x) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", page_l_nc_milton_continuous(mu, sigma).pmf(x))
6.3563523462564525615615615614561356E-20
```

dist_page_l_nc_milton.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function (sf) of a random variable X, following a Page L distribution under Milton alternatives:

$$\text{sf}_X(x) = 1 - \text{cdf}_X(x)$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", page_l_nc_milton_continuous(mu, sigma).pmf(x))
sf: 6.3563523462564525615615615614561356E-20
```

dist_page_l_nc_milton.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following a Page L distribution under Milton alternatives. There is no closed form for the qtf: It is computed with Newton iterations where the starting values are from Boost.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", page_l_nc_milton_continuous(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_page_l_nc_milton.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following a Page L distribution under Milton alternatives:

$$\text{isf}_X(q) = \text{qtf}_X(1-q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", page_l_nc_milton_continuous(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_page_l_nc_milton.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following a Page L distribution under Milton alternatives:

$$C_X(t) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", page_l_nc_milton_continuous(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_page_l_nc_milton.**m_x**(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following a Page L distribution under Milton alternatives:

$$M_X(t) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("m_x: ", page_l_nc_milton_continuous(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_page_l_nc_milton.**k_x**(t, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following a Page L distribution under Milton alternatives:

$$K_X(t) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", page_l_nc_milton_continuous(mu, sigma).k_x(t, k))
6.356352346256452561561561561456l356E+00
```

dist_page_l_nc_milton.**moments**(k)

Returns the first j moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following a Page L distribution under Milton alternatives (Wikipedia). The moments are calculated from the cumulants.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", page_l_nc_milton_continuous(mu, sigma).moments(k))
6.356352346256452561561561561456l356E+00
```

dist_page_l_nc_milton.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following a Page L distribution under Milton alternatives. The cumulants of J_N are given by :

$$\kappa_{2j} = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", page_l_nc_milton_continuous(mu, sigma).cumulants(k))
6.356352346256452561561561561456l356E+00
```

4.15 Discrete (non-lattice) distributions related to rank tests

4.15.1 Cochran-Friedman-Quade distribution

class ctx.**dist_friedman**(k, n)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The distribution of the Cochran-Friedman-Quade tests is a discrete (non-lattice) probability distribution with k samples of size $n_1 \geq 1, \ldots, n_k \geq 1$ and the support interval $(0, nm))$. See also Wikipedia [1176], Noether [422], vandeWiel [785] .

Consider k independent groups X_i of sizes $n_i, i = 1 \ldots k$. The Page L statistic is defined as

$$L = ??$$

dist_friedman.**pmf**(x)

Returns $\text{pmf}_X(x)$, the probability mass function (pmf) of a random variable X, following a Page L distribution. Let $p(n_1, \ldots, n_k; t) = \Pr[J_N = t]$. If J_N is based on k independent samples of sizes $n_1, \ldots, n_k$, then (Skillings 1980):

$$p(n_1, \ldots, n_k; t) = ??$$

where the sum is over all x with positive $p(\cdot)$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pmf: ", friedman_continuous(mu, sigma).pmf(x))
6.35635234625645256156156145613356E-20
```

dist_friedman.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a Page L distribution. Let $p(n_1, \ldots, n_k; t) = \Pr[J_N = t]$. If J_N is based on k independent samples of sizes $n_1, \ldots, n_k$, then (Skillings 1980):

$$p(n_1, \ldots, n_k; t) = ??$$

where the sum is over all x with positive $p(\cdot)$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", friedman_continuous(mu, sigma).pmf(x))
6.35635234625645256156156145613356E-20
```

dist_friedman.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function (sf) of a random variable X, following a Page L distribution:

$$\text{sf}_X(x) = 1 - \text{cdf}_X(x)$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", friedman_continuous(mu, sigma).pmf(x))
sf: 6.35635234625645256156156145613356E-20
```

dist_friedman.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following a Page L distribution. There is no closed form for the qtf: It is computed with Newton iterations where the starting values are from Boost.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", friedman_continuous(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_friedman.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following a Page L distribution:

$$\text{isf}_X(q) = \text{qtf}_X(1-q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", friedman_continuous(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_friedman.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following a Page L distribution:

$$C_X(t) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", friedman_continuous(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_friedman.**m_x**(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following a Page L distribution:

$$M_X(t) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("m_x: ", friedman_continuous(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_friedman.**k_x**(t, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following a Page L distribution:

$$K_X(t) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", friedman_continuous(mu, sigma).k_x(t, k))
6.356352346256452561561561456135 6E+00
```

dist_friedman.**moments**(k)

Returns the first j moments, $\mu_j, j = 1 \ldots k$, of a random variable X, following a Page L distribution (Wikipedia). The moments are calculated from the cumulants.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", friedman_continuous(mu, sigma).moments(k))
6.356352346256452561561561456135 6E+00
```

dist_friedman.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \ldots k$, of a random variable X, following a Page L distribution. The cumulants of J_N are given by :

$$\kappa_{2j} = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", friedman_continuous(mu, sigma).cumulants(k))
6.356352346256452561561561456135 6E+00
```

4.15.2 Kruskal-Wallis distribution

class ctx.**dist_kruskal_wallis**(k, n)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The distribution of the Kruskal-Wallis test is a discrete (non-lattice) probability distribution with k samples of size $n_1 \geq 1, \ldots, n_k \geq 1$ and the support interval $(0, nm))$. See also Wikipedia [1176], Noether [422], vandeWiel [785] .

Consider k independent groups X_i of sizes $n_i, i = 1 \ldots k$. The Kruskal_Wallis statistic is defined as

$$L = ??$$

dist_kruskal_wallis.**pmf**(x)

Returns $\text{pmf}_X(x)$, the probability mass function (pmf) of a random variable X, following a Kruskal-Wallis distribution. Let $p(n_1, \ldots, n_k; t) = \Pr[J_N = t]$. If J_N is based on k independent samples of sizes $n_1, \ldots, n_k$, then (Skillings 1980):

$$p(n_1, \ldots, n_k; t) = ??$$

where the sum is over all x with positive $p(\cdot)$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("pmf: ", kruskal_wallis_continuous(mu, sigma).pmf(x))
6.3563523462564525615615615614561356E-20
```

dist_kruskal_wallis.**cdf**(x)

Returns $\text{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X, following a Kruskal-Wallis distribution. Let $p(n_1, \ldots, n_k; t) = \Pr[J_N = t]$. If J_N is based on k independent samples of sizes $n_1, \ldots, n_k$, then (Skillings 1980):

$$p(n_1, \ldots, n_k; t) = ??$$

where the sum is over all x with positive $p(\cdot)$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print ("cdf: ", kruskal_wallis_continuous(mu, sigma).pmf(x))
6.3563523462564525615615615614561356E-20
```

dist_kruskal_wallis.**sf**(x)

Returns $\text{sf}_X(x)$, the survival function (sf) of a random variable X, following a Kruskal-Wallis distribution:

$$\text{sf}_X(x) = 1 - \text{cdf}_X(x)$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; x = 3;
>>> print (" sf: ", kruskal_wallis_continuous(mu, sigma).pmf(x))
sf: 6.3563523462564525615615615614561356E-20
```

dist_kruskal_wallis.**qtf**(q)

Returns $\text{qtf}_X(x)$, the quantile function (qtf) of a random variable X, following a Kruskal-Wallis distribution. There is no closed form for the qtf: It is computed with Newton iterations where the starting values are from Boost.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("qtf: ", kruskal_wallis_continuous(mu, sigma).qtf(q))
qtf: 6.35635234625645256156156145613 56E+00
```

dist_kruskal_wallis.**isf**(q)

Returns $\text{isf}_X(q)$, the inverse survival function (isf) of a random variable X, following a Kruskal-Wallis distribution:

$$\text{isf}_X(q) = \text{qtf}_X(1-q).$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; q = 0.3;
>>> print ("isf: ", kruskal_wallis_continuous(mu, sigma).isf(q))
6.35635234625645256156156145613 56E+00
```

dist_kruskal_wallis.**c_x**(t)

Returns $C_X(t)$, the characteristic function of a random variable X, following a Kruskal-Wallis distribution:

$$C_X(t) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", kruskal_wallis_continuous(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_kruskal_wallis.**m_x**(t)

Returns $M_X(t)$, the moment generating function of a random variable X, following a Kruskal-Wallis distribution:

$$M_X(t) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("m_x: ", kruskal_wallis_continuous(mu, sigma).c_x(t))
6.35635234625645256156156145613 56E+00
```

dist_kruskal_wallis.**k_x**(t, *k=0*)

Returns $K_X(t)$, the cumulant generating function of a random variable X, following a Kruskal-Wallis distribution:

$$K_X(t) = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3; k = 6;
>>> print ("c_x: ", kruskal_wallis_continuous(mu, sigma).k_x(t, k))
6.35635234625645256156156145613 56E+00
```

dist_kruskal_wallis.**moments**(k)

Returns the first j moments, $\mu_j, j = 1 \dots k$, of a random variable X, following a Kruskal-Wallis distribution (Wikipedia). The moments are calculated from the cumulants.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", kruskal_wallis_continuous(mu, sigma).moments(k))
6.35635234625645256156156145613 56E+00
```

dist_kruskal_wallis.**cumulants**(k)

Returns the first j cumulants, $\kappa_j, j = 1 \dots k$, of a random variable X, following a Kruskal-Wallis distribution. The cumulants of J_N are given by :

$$\kappa_{2j} = ??$$

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; k = 6;
>>> print ("saddlepoint: ", kruskal_wallis_continuous(mu, sigma).cumulants(k))
6.35635234625645256156156145613 56E+00
```

CHAPTER

FIVE

NUMERICAL CALCULUS

The source code for the C# tests in Visual Studio is divided by in 2 parts:

Part 1 contains procedures from DAMath, Boost Math, Boost Odeint and Eigen. The source code for the C# tests in Visual Studio can be found online in the `XlCalcNet` repository or in the corresponding local `XlCalcNet` folder in the file B05a_NumericalCalculus.cs.

Part 2 is devoted to numerical integration in ball arithmetic. The source code for the C# tests in Visual Studio can be found online in the `XlCalcNet` repository or in the corresponding local `XlCalcNet` folder in the file B05b_FlintNumericalCalculus.cs.

5.1 Introduction

5.1.1 Delegates, lambda expressions, callback functions: an example

Returns a local minimum of the function f in the interval (a, b), implementing Brent's algorithm.

See also: Wikipedia [1081], Zhang [1493], Brent [36]

x is the approximate minimum abscissa, fx=f(x). eps and t define a tolerance tol =eps*|x|+t. f is never evaluated for 2 points closer together than tol. eps shall not be less than 2*eps_x, preferably not smaller than sqrt(eps_x). ic is the iteration count, -1 if a=b, 0 if max. count = 5000 exceeded. The algorithm combines golden section search and successive parabolic interpolation using only function (not derivative) evaluations.

Parameters:

f
: the function for which a local minimum is to be found.

a
: left border of the interval (a, b).

b
: right border of the interval (a, b).

eps
: defines a tolerance tol = $\epsilon|x|+$ t.

tol
: defines a tolerance tol = $\epsilon|x|+$ t.

Results:

x
: the approximate minimum abscissae.

fx
: fx = f(x).

ic
: the iteration count, -1 if a=b, 0 if max. count = 5000 exceeded.

5.1.2 Usage in Python

The routine in Python, using a local function definition. This form allows monitoring of the calls into the function (by un-commenting the `print` statement), but variables and functions local to the calling function cannot be accessed:

```
>>> from xlcalcnet import math53
>>> a = -10.0; b = 20.0; eps = 1E-8; tol = 1E-8
>>> f = lambda x: -ereal.Exp(-x * x)
>>> res = ereal.LocalMin(f, a, b, eps, tol)
>>> print('res: (x0, fx0, ic1):', res)
```

The same routine in Python, using a local function definition. This form allows monitoring of the calls into the function (by un-commenting the `print` statement). Variables and functions local to the calling function can be accessed:

```
a = -10.0; b = 20.0; eps = 1E-8; tol = 1E-8
f = lambda x: -ereal.Exp(-x * x)
print('ereal.LocalMin')
res3 = ereal.LocalMin(f, a, b, eps, tol)
print('res3: (x0, fx0, ic1):', res3)
print()
print()
```

The same routine in Python, using a lambda expression. Variables and functions local to the calling function can be accessed:

```
a = -10.0; b = 20.0; eps = 1E-8; tol = 1E-8
f = lambda x: -ereal.Exp(-x * x)
print('ereal.LocalMin')
res3 = ereal.LocalMin(f, a, b, eps, tol)
print('res3: (x0, fx0, ic1):', res3)
print()
print()
```

The same routine in Python, inserting the lambda expression into `ereal.LocalMin`. Variables and functions local to the calling function can be accessed from within the lambda expression:

```
a = -10.0; b = 20.0; eps = 1E-8; tol = 1E-8
f = lambda x: -ereal.Exp(-x * x)
print('ereal.LocalMin')
res3 = ereal.LocalMin(lambda x: -ereal.Exp(-x * x), a, b, eps, tol)
print('res3: (x0, fx0, ic1):', res3)
print()
print()
```

5.1.3 Usage in CSharp

The same routine in CSharp, using a callback function definition outside of the scope of the calling function. This form allows the callback function to be called from other functions as well, and it supports monitoring of the calls into the function (by un-commenting the `Console.WriteLine` statement), but variables, functions and subroutines local to the calling function cannot be accessed:

```
public static ereal XF1(ereal x)
{
    var y = -ereal.Exp(-x * x);
    //Console.WriteLine("x: {0},   y: {1}", x, y)
    return y;
}

public static void DemoLocalMin()
{
    var a = -10; var b = 20; var eps = 1E-10; var tol = 1E-10;
    var Res1 = ereal.LocalMin(XF1, a, b, eps, tol);
    Console.WriteLine("Res1:(x, fx, ic) {0}", Res1);
}
```

The same routine in CSharp, using a multi-line lambda expression to define the callback function. Note that in contrast to Python, in CSharp a lambda expression can contain not only expressions but also statements, including a `return` statement. This is functionally equivalent to defining a local function without the need to create a new class. Variables, functions and subroutines local to the calling function can be accessed from within the lambda expression. The function which is defined by the lambda expression can be called locally. In this form the lambda expression allows monitoring of the calls into the callback function (by un-commenting the `Console.WriteLine` statement):

```
public static void DemoLocalMin2()
{
    var a = -10; var b = 20; var eps = 1E-10; var tol = 1E-10;
    var F2 = ereal (ereal x) =>
    {
        var y = -ereal.Exp(-x * x);
        //Console.WriteLine("x: {0},   y: {1}", x, y)
        return y;
    };
    var Res1 = ereal.LocalMin(F2, a, b, eps, tol);
    Console.WriteLine("Res1:(x, fx, ic) {0}", Res1);
}
```

The same routine in CSharp, using a single-line lambda expression to define the callback function. Note that there is no `return` statement, and the return type of the function is not specified but inferred from the function expression. Variables, functions and subroutines local to the calling function can be accessed from within the lambda expression. The function which is defined by the lambda expression can be called locally. Monitoring of calls into the callback function is not supported:

```
public static void DemoLocalMin3()
{
    var a = -10; var b = 20; var eps = 1E-10; var tol = 1E-10;
    var F3 = (ereal x) => -ereal.Exp(-x * x);
    var Res1 = ereal.LocalMin(F3, a, b, eps, tol);
    Console.WriteLine("Res1:(x, fx, ic) {0}", Res1);
}
```

The same routine in CSharp, using an anonymous lambda expression, which is like a single line lambda expression inserted directly into `ereal.LocalMin`. Variables and functions local to the calling function can be accessed from within the lambda expression. Since an anonymous lambda expression does not have a name, it cannot be called locally. Monitoring of calls into the callback function is not supported:

```
public static void DemoLocalMin4()
{
    var a = -10; var b = 20; var eps = 1E-10; var tol = 1E-10;
    var Res1 = ereal.LocalMin((ereal x) => -ereal.Exp(-x * x), a, b, eps, tol);
    Console.WriteLine("Res1:(x, fx, ic) {0}", Res1);
}
```

All of the above CSharp routines produce the following output:

```
Res1:(x, fx, ic) (-1.000175554142801716 0E-10, -1.0000000000000000000, 14)
```

5.2 DAMath: Numerical Rootfinding and Minimization

5.2.1 Quadratic Equation, Real Coefficients

`ctx.squadx`(a, b, c)

where `ctx` is `math53`. Solves the quadratic equation $ax^2 + bx + c = 0$.

Parameters

- **a** – real coeffient in the quadratic equation.
- **b** – real coeffient in the quadratic equation.
- **c** – real coeffient in the quadratic equation.

Returns

a tuple (*z1, z2*), where *z1* is the first complex root.and *z2* is the second complex root.

See also: Wikipedia [1092], MathWorld [807].

```
>>> from xlcalcnet import math53
>>> a = -13;  b = 4;  c = 5
>>> ic, x1, y1, x2, y2 = ctx.squadx(a,b,c)
>>> print("ic: ", ic,"x1: ", x1,"y1: ", y1,"x2: ", x2,"y2: ", y2)
```

```
Quadratic
Return Code:  2
x1:  -0.4851249125321596 y1:  0.0
x2:  0.7928172202244673 y2:  0.0
```

5.2.2 Cubic Equation, Real Coefficients

`ctx.cubsolve`(a, b, c, d)

where `ctx` is `math53`. Solves the cubic equation $ax^3 + bx^2 + cx + d = 0$.

Parameters

- **a** – real coeffient in the cubic equation.
- **b** – real coeffient in the cubic equation.
- **c** – real coeffient in the cubic equation.
- **d** – real coeffient in the cubic equation.

Returns

a tuple (*x, z1, z2*), where *x* is the real root, *z1* is the first complex root and *z2* is the second complex root.

See also: Wikipedia [1083], MathWorld [794].

```
>>> from xlcalcnet import math53
>>> a = -13; b = 4; c = 5; d = 1
>>> x0, x1, y1, x2, y2 = ctx.cubsolve(a,b,c,d)
>>> print("x0: ", x0,"x1: ", x1,"y1: ", y1,"x2: ", x2,"y2: ", y2)
```

```
Cubic
x:  0.8593905490844492
x1:  -0.27584912069607076 y1:  -0.11582803026356575
x2:  -0.27584912069607076 y2:  0.11582803026356575
```

5.2.3 Brent's algorithm for finding a local minimum

`ctx.localmin`(*f*, *a*, *b*, *eps*, *t*)

where `ctx` is `math53`. Returns a local minimum of the function *f* in the interval (a, b), implementing Brent's algorithm.

Parameters

- **f** – the function for which a local minimum is to be found.
- **a** – the left border of the search interval.
- **b** – the right border of the search interval.
- **eps** – defines a tolerance eps*|x| + tol; eps should not be less than 2*eps_x, preferably not smaller than sqrt(eps_x).
- **tol** – defines a tolerance eps*|x| + tol.

Returns

a tuple (*localmin, fx, ic*), where *localmin* is an approximation to a local minimum; *fx* = f(localmin); and *ic* is the iteration count, -1 if a=b, 0 if max.=5000 exceeded.

See also: Wikipedia [1081], Zhang [1493], Brent [36]

x is the approximate minimum abscissa, fx=f(x). eps and t define a tolerance tol =eps*|x|+t. f is never evaluated for 2 points closer together than tol. eps shall not be less than 2*eps_x, preferably not smaller than sqrt(eps_x). ic is the iteration count, -1 if a=b, 0 if max. count = 5000 exceeded. The algorithm combines golden section search and successive parabolic interpolation using only function (not derivative) evaluations.

Examples in Python

The routine in Python, using a local function definition. This form allows monitoring of the calls into the function (by un-commenting the `print` statement), but variables and functions local to the calling function cannot be accessed:

```
>>> from xlcalcnet import math53
>>> a = -10.0; b = 20.0; eps = 1E-8; tol = 1E-8
>>> f = lambda x: -ereal.Exp(-x * x)
>>> res = ereal.LocalMin(f, a, b, eps, tol)
>>> print('res: (x0, fx0, ic1):', res)
```

The same routine in Python, using a local function definition. This form allows monitoring of the calls into the function (by un-commenting the `print` statement). Variables and functions local to the calling function can be accessed:

```
a = -10.0; b = 20.0; eps = 1E-8; tol = 1E-8
f = lambda x: -ereal.Exp(-x * x)
print('ereal.LocalMin')
res3 = ereal.LocalMin(f, a, b, eps, tol)
print('res3: (x0, fx0, ic1):', res3)
print()
print()
```

The same routine in Python, using a lambda expression. Variables and functions local to the calling function can be accessed:

```
a = -10.0; b = 20.0; eps = 1E-8; tol = 1E-8
f = lambda x: -ereal.Exp(-x * x)
print('ereal.LocalMin')
res3 = ereal.LocalMin(f, a, b, eps, tol)
print('res3: (x0, fx0, ic1):', res3)
print()
print()
```

The same routine in Python, inserting the lambda expression into `ereal.LocalMin`. Variables and functions local to the calling function can be accessed from within the lambda expression:

```
a = -10.0; b = 20.0; eps = 1E-8; tol = 1E-8
f = lambda x: -ereal.Exp(-x * x)
print('ereal.LocalMin')
res3 = ereal.LocalMin(lambda x: -ereal.Exp(-x * x), a, b, eps, tol)
print('res3: (x0, fx0, ic1):', res3)
print()
print()
```

Examples in CSharp

The same routine in CSharp, using a callback function definition outside of the scope of the calling function. This form allows the callback function to be called from other functions as well, and it supports monitoring of the calls into the function (by un-commenting the `Console.WriteLine` statement), but variables, functions and subroutines local to the calling function cannot be accessed:

```
public static ereal XF1(ereal x)
{
    var y = -ereal.Exp(-x * x);
    //Console.WriteLine("x: {0},   y: {1}", x, y)
    return y;
}

public static void DemoLocalMin()
{
    var a = -10; var b = 20; var eps = 1E-10; var tol = 1E-10;
    var Res1 = ereal.LocalMin(XF1, a, b, eps, tol);
    Console.WriteLine("Res1:(x, fx, ic) {0}", Res1);
}
```

The same routine in CSharp, using a multi-line lambda expression to define the callback function. Note that in contrast to Python, in CSharp a lambda expression can contain not only expressions but also statements, including a `return` statement. This is functionally equivalent to defining a local function without the need to create a new class. Variables, functions and subroutines local to the calling function can be accessed from within the lambda expression. The function which is defined by the lambda expression can be called locally. In this form the lambda expression allows monitoring of the calls into the callback function (by un-commenting the `Console.WriteLine` statement):

```
public static void DemoLocalMin2()
{
    var a = -10; var b = 20; var eps = 1E-10; var tol = 1E-10;
    var F2 = ereal (ereal x) =>
    {
        var y = -ereal.Exp(-x * x);
        //Console.WriteLine("x: {0},   y: {1}", x, y)
        return y;
    };
    var Res1 = ereal.LocalMin(F2, a, b, eps, tol);
    Console.WriteLine("Res1:(x, fx, ic) {0}", Res1);
}
```

The same routine in CSharp, using a single-line lambda expression to define the callback function. Note that there is no `return` statement, and the return type of the function is not specified but inferred from the function expression. Variables, functions and subroutines local to the calling function can be accessed from within the lambda expression. The function which is defined by the lambda expression can be called locally. Monitoring of calls into the callback function is not supported:

```
public static void DemoLocalMin3()
{
    var a = -10; var b = 20; var eps = 1E-10; var tol = 1E-10;
    var F3 = (ereal x) => -ereal.Exp(-x * x);
    var Res1 = ereal.LocalMin(F3, a, b, eps, tol);
    Console.WriteLine("Res1:(x, fx, ic) {0}", Res1);
}
```

The same routine in CSharp, using an anonymous lambda expression, which is like a single line lambda expression inserted

directly into `ereal.LocalMin`. Variables and functions local to the calling function can be accessed from within the lambda expression. Since an anonymous lambda expression does not have a name, it cannot be called locally. Monitoring of calls into the callback function is not supported:

```
public static void DemoLocalMin4()
{
    var a = -10; var b = 20; var eps = 1E-10; var tol = 1E-10;
    var Res1 = ereal.LocalMin((ereal x) => -ereal.Exp(-x * x), a, b, eps, tol);
    Console.WriteLine("Res1:(x, fx, ic) {0}", Res1);
}
```

All of the above CSharp routines produce the following output:

```
Res1:(x, fx, ic) (-1.000175554142801716OE-10, -1.0000000000000000000, 14)
```

5.2.4 Modified Brent's algorithm for finding a local minimum

`ctx.mbrent`(*f*, *a*, *b*, *t*)

where `ctx` is `math53`. Returns a local minimum of the function *f* in the interval (a, b), implementing a modified (simplified) version of Brent's algorithm as in procedure localmin with fixed eps=0.5*sqrt(eps_x).

Parameters

- **f** – the function for which a local minimum is to be found.
- **a** – the left border of the search interval.
- **b** – the right border of the search interval.
- **tol** – defines a tolerance eps*|x| + tol.

Returns

a tuple (*localmin, fx, ic*), where *localmin* is an approximation to a local minimum; *fx* = f(localmin); and *ic* is the iteration count, -1 if a=b, 0 if max.=5000 exceeded.

See also: Wikipedia [1081], Zhang [1493], Brent [36], BoostMath [47].

The routine in Python:

```
>>> from xlcalcnet import math53
>>> a = -10.0; b = 20.0; tol = 1E-8
>>> f = lambda x: -ereal.Exp(-x * x)
>>> res = ereal.MBrent(f, a, b, tol)
>>> print('res4: (x0, fx0, ic1):', res4)
```

5.2.5 Rootfinding: Brent/Dekker algorithm

`ctx.zbrent`(f, a, b, t)

where `ctx` is `math53`. Performs the Brent/Dekker algorithm with guaranteed convergence for finding a zero of a function,; assumes that f(a) and f(b) have different signs.

Parameters

- **f** – the function for which a zero is sought.
- **a** – the left border of the search interval.
- **b** – the right border of the search interval.
- **tol** – defines a tolerance 6 * eps_x * $|x|$ +2*tol.

Returns

a tuple (*root, ic, err*), where *root* is an approximation to a zero (root) of the function; *ic* is the iteration count, -1 if a=b, 0 if max.=5000 exceeded; and *err* is the error code (0: no error, -1: if f(a) and f(b) have the same sign, -2: max. iteration count exceeded).

Brent/Dekker algorithm with guaranteed convergence for finding a zero of a function: Return a zero x of the function f in the interval [a,b] to within a tolerance 6*eps_x*|x|+2*t, where t is a positive tolerance; assumes that f(a) and f(b) have different signs. ic is the iteration count; err is an error code (0: no error, -1: if f(a) and f(b) have the same sign, -2: max. iteration count exceeded). The algorithm is based on a combination of successive interpolations and bisection.

See also: Wikipedia [1081], Zhang [1493], Brent [37], BoostMath [47].

The routine in Python:

```
>>> from xlcalcnet import math53
>>> a = -20.0; b = 20.0; tol = 1E-8
>>> f = lambda x: ereal.Exp(x) - 10
>>> res = ereal.ZBrent(f, a, b, tol)
>>> print('res5: (x0, ic1, err):', res5)
```

5.2.6 Rootfinding: Simplified Brent/Dekker algorithm

`ctx.zeroin`(f, a, b, t)

where `ctx` is `math53`. Performs a simplified version of the Brent/Dekker algorithm for finding a zero of a function; assumes that f(a) and f(b) have different signs.

Parameters

- **f** – the function for which a zero is sought.
- **a** – the left border of the search interval.
- **b** – the right border of the search interval.
- **tol** – defines a tolerance 6 * eps_x * $|x|$ +2*tol.

Returns

an approximation to a zero (root) of the function.

See also: Wikipedia [1081], Zhang [1493], Brent [37], BoostMath [47].

The routine in Python:

```
>>> from xlcalcnet import math53
>>> a = -20.0; b = 20.0; tol = 1E-8
>>> f = lambda x: ereal.Exp(x) - 10
>>> x0 = ereal.ZeroIn(f, a, b, tol)
>>> print('x0: ', x0)
```

5.3 Boost/Math: Root Finding and Minimization Algorithms

5.3.1 Root Finding Without Derivatives (TOM 748 algorithm)

ctxboost.**BracketRoot**(*f*, *guess*, *factor*, *is_rising*, *get_digits*, *maxit*)

where ctx is ctxboost.

Parameters

- **f** – the function for which a root is determined.
- **guess** – an intial guess.
- **factor** – a multiplication factor used when searching for the bracket.
- **is_rising** – an indicator whether the function is rising.
- **get_digits** – the targeted number of accurate digits.
- **maxit** – the maximal number of iterations.

Returns

a tuple (*root, error, iter*), where *root* is an approximation to a root of the function *f*, using the TOM 748 algorithm for finding a zero; *error* is an estimate of the modulus of the error of the approximation; and *iter* is the actual number of iterations.

See also: BoostMath [38], Alefeld *et al.* [8].

The routine in Python:

```
>>> from xlcalcnet import math53
>>> f = lambda x: x * x * x - 28
>>> guess = 2.33;  factor = 2.0; is_rising = True; get_digits = 64;  maxit = 20
>>> res = ereal.BracketRoot(f, guess, factor, is_rising, get_digits, maxit)
>>> print("res (x0, error, iter): ", res)
```

```
boost.bracket_root(f, guess, factor, is_rising, get_digits, maxit
result:  3.036588971875662
```

5.3.2 Root Finding With Derivatives: Newton-Raphson

`ctxboost.`**`NewtonRaphson`**(*f*, *df*, *guess*, *xmin*, *xmax*, *get_digits*, *maxit*)

where `ctx` is `ctxboost`.

Parameters

- **`f`** – the function for which a root is determined.
- **`df`** – the first derivative of the function *f*.
- **`guess`** – an intial guess.
- **`xmin`** – the left border of the search interval.
- **`xmax`** – the right border of the search interval.
- **`get_digits`** – the targeted number of accurate digits.
- **`maxit`** – the maximal number of iterations.

Returns

a tuple (*root, iter*), where *root* is an approximation to a root of the function *f* in the interval (*xmin, xmax*), using the Newton algorithm for finding a zero; and *iter* is the actual number of iterations.

See also: Wikipedia [1089], BoostMath [48], MathWorld [803].

The routine in Python:

```
>>> from xlcalcnet import math53
>>> f = lambda x: x * x * x - 28
>>> df1 = lambda x: 3 * x * x
>>> guess = 2.33; xmin = 1.0; xmax = 4.0; get_digits = 64;  maxit = 20
>>> result3 = ereal.NewtonRaphson(f, df1, guess, xmin, xmax, get_digits, maxit)
>>> print("res2 (x0, iter): ", result3)
```

```
boost.newton_raphson(f, df, guess, xmin, xmax, get_digits, maxit)
result:  3.0365889718756627
```

5.3.3 Root Finding With Derivatives: Halley

`ctxboost.`**`Halley`**(*f*, *df*, *d2f*, *guess*, *xmin*, *xmax*, *get_digits*, *maxit*)

where `ctx` is `ctxboost`.

Parameters

- **`f`** – the function for which a root is determined.
- **`df`** – the first derivative of the function *f*.
- **`df2`** – the second derivative of the function *f*.
- **`guess`** – an intial guess.
- **`xmin`** – the left border of the search interval.
- **`xmax`** – the right border of the search interval.
- **`get_digits`** – the targeted number of accurate digits.
- **`maxit`** – the maximal number of iterations.

Returns

a tuple (*root, iter*), where *root* is an approximation to a root of the function *f* in the interval (*xmin, xmax*), using the Halley algorithm for finding a zero; and *iter* is the actual number of iterations.

See also: Wikipedia [1086], BoostMath [48], MathWorld [798].

The routine in Python:

```
>>> from xlcalcnet import math53
>>> f = lambda x: x * x * x - 28
>>> df1 = lambda x: 3 * x * x
>>> df2 = lambda x: 6 * x
>>> guess = 2.33; xmin = 1.0; xmax = 4.0; get_digits = 64;  maxit = 20
>>> res = ereal.Halley(f, df1, df2, guess, xmin, xmax, get_digits, maxit)
>>> print("res (x0, iter): ", res)
```

```
boost.halley(f, df, df2, guess, xmin, xmax, get_digits, maxit)
result:  3.0365889718756627
```

5.3.4 Root Finding With Derivatives: Schröder

`ctxboost.`**`Schroeder`**(*f*, *df*, *d2f*, *guess*, *xmin*, *xmax*, *get_digits*, *maxit*)

where `ctx` is `ctxboost`.

Parameters

- **`f`** – the function for which a root is determined.
- **`df`** – the first derivative of the function *f*.
- **`df2`** – the second derivative of the function *f*.
- **`guess`** – an intial guess.
- **`xmin`** – the left border of the search interval.
- **`xmax`** – the right border of the search interval.
- **`get_digits`** – the targeted number of accurate digits.
- **`maxit`** – the maximal number of iterations.

Returns

a tuple (*root, iter*), where *root* is an approximation to a root of the function *f* in the interval (*xmin, xmax*), using the Schröder algorithm for finding a zero; and *iter* is the actual number of iterations.

See also: BoostMath [48], MathWorld [808], Schröder [493].

The routine in Python:

```
>>> from xlcalcnet import math53
>>> f = lambda x: x * x * x - 28
>>> df1 = lambda x: 3 * x * x
>>> df2 = lambda x: 6 * x
>>> guess = 2.33; xmin = 1.0; xmax = 4.0; get_digits = 64;  maxit = 20
>>> res = ereal.Schroeder(f, df1, df2, guess, xmin, xmax, get_digits, maxit)
>>> print("res (x0, iter): ", res)
```

```
boost.schroder(f, df, df2, guess, xmin, xmax, get_digits, maxit)
result:  3.0365889718756627
```

5.3.5 Locating Function Minima using Brent's algorithm

ctx.**BrentMinimum**(*f*, *a*, *b*, *get_digits*, *maxit*)

where ctx is ctxboost.

Parameters

- **f** – the function for which a local minimum is determined.
- **a** – the left border of the search interval.
- **b** – the right border of the search interval.
- **get_digits** – the targeted number of accurate digits.
- **maxit** – the maximal number of iterations.

Returns

a tuple (*localmin, fx0, iter*), where *localmin* is an approximation to a local minimum of the function f in the interval (*a,b*), using Brent's algorithm; *fx0* is the value of *f(localmin)*; and *iter* is the number of iterations.

See also: Wikipedia [1081], Zhang [1493], Brent [36], BoostMath [47].

The routine in Python:

```
>>> from xlcalcnet import math53
>>> f = lambda x: (x + 3) * (x - 1) * (x - 1)
>>> bracket_min = 0.5; bracket_max = 1.5;  bits = 125;  maxit = 20
>>> res = ereal.Brent_Minimum(f, bracket_min, bracket_max, bits, maxit)
>>> print("res5 (x0, fx0, iter): ", result3)
```

```
boost.brent_minimum(f3, a, b, get_digits, maxit)
x0:  2.9086877250246185e-09
```

5.4 Mpmath: Rootfinding and optimization

5.4.1 General root-finding interface

`ctx.findroot`(*f*, *x0*, *solver='secant'*, *tol=None*, *verbose=False*, *verify=True*, ***kwargs*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Find a solution to $f(x) = 0$, using *x0* as starting point or interval for *x*.

Multidimensional overdetermined systems are supported. You can specify them using a function or a list of functions.

If the found root does not satisfy $|f(x)|^2 \leq \mathrm{tol}$, an exception is raised (this can be disabled with *verify=False*).

Arguments

f
one dimensional function

x0
starting point, several starting points or interval (depends on solver)

tol
the returned solution has an error smaller than this

verbose
print additional information for each iteration if true

verify
verify the solution and raise a ValueError if $|f(x)|^2 > \mathrm{tol}$

solver
a generator for f and *x0* returning approximative solution and error

maxsteps
after how many steps the solver will cancel

df
first derivative of f (used by some solvers)

d2f
second derivative of f (used by some solvers)

multidimensional
force multidimensional solving

J
Jacobian matrix of f (used by multidimensional solvers)

norm
used vector norm (used by multidimensional solvers)

solver has to be callable with `(f, x0, **kwargs)` and return an generator yielding pairs of approximative solution and estimated error (which is expected to be positive). You can use the following string aliases: 'secant', 'mnewton', 'halley', 'muller', 'illinois', 'pegasus', 'anderson', 'ridder', 'anewton', 'bisect'

5.4.2 Bisection algorithm

`ctx.bisection`(*f*, *x0*, *solver='secant'*, *tol=None*, *verbose=False*, *verify=True*, ***kwargs*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Find a solution to $f(x) = 0$, using *x0* as starting point or interval for *x*.

1d-solver generating pairs of approximative root and error. See also: Wikipedia [1080].

Uses bisection method to find a root of f in [a, b]. Might fail for multiple roots (needs sign change).

Pro:

- robust and reliable

Contra:

- converges slowly
- needs sign change

5.4.3 Secant algorithm

`ctx.secant`(*f*, *x0*, *solver='secant'*, *tol=None*, *verbose=False*, *verify=True*, ***kwargs*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Find a solution to $f(x) = 0$, using *x0* as starting point or interval for *x*.

1d-solver generating pairs of approximative root and error. See also: Wikipedia [1095].

Needs starting points x0 and x1 close to the root. x1 defaults to x0 + 0.25.

Pro:

- converges fast

Contra:

- converges slowly for multiple roots

The function `findroot()` locates a root of a given function using the secant method by default. A simple example use of the secant method is to compute π as the root of $\sin x$ closest to $x_0 = 3$:

```
>>> from xlcalcnet import *
>>> mp.dps = 30; mp.pretty = True
>>> findroot(sin, 3)
3.14159265358979323846264338328
```

The secant method can be used to find complex roots of analytic functions, although it must in that case generally be given a nonreal starting value (or else it will never leave the real line):

```
>>> mp.dps = 15
>>> findroot(lambda x: x**3 + 2*x + 1, j)
(0.226698825758202 + 1.46771150871022j)
```

A nice application is to compute nontrivial roots of the Riemann zeta function with many digits (good initial values are needed for convergence):

```
>>> mp.dps = 30
>>> findroot(zeta, 0.5+14j)
(0.5 + 14.1347251417346937904572519836j)
```

The secant method can also be used as an optimization algorithm, by passing it a derivative of a function. The following example locates the positive minimum of the gamma function:

```
>>> mp.dps = 20
>>> findroot(lambda x: diff(gamma, x), 1)
1.4616321449683623413
```

5.4.4 Illinois, Pegasus, Anderson algorithms

`ctx.illinois`(*f*, *x0*, *solver='secant'*, *tol=None*, *verbose=False*, *verify=True*, ***kwargs*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Find a solution to $f(x) = 0$, using *x0* as starting point or interval for x.

1d-solver generating pairs of approximative root and error. See also: Wikipedia [1087], Dowell and Jarratt [286], Wikipedia [1078].

Uses Illinois method or similar to find a root of f in [a, b]. Might fail for multiple roots (needs sign change). Combines bisect with secant (improved regula falsi).

The only difference between the methods is the scaling factor m, which is used to ensure convergence (you can choose one using the 'method' keyword):

Illinois method ('illinois'):
m = 0.5

Pegasus method ('pegasus'):
m = fb/(fb + fz)

Anderson-Bjoerk method ('anderson'):
m = 1 - fz/fb if positive else 0.5

Pro:

- converges very fast

Contra:

- has problems with multiple roots
- needs sign change

Intersection methods

When you need to find a root in a known interval, it's highly recommended to use an intersection-based solver like `'anderson'` or `'ridder'`. Usually they converge faster and more reliable. They have however problems with multiple roots and usually need a sign change to find a root:

```
>>> findroot(lambda x: x**3, (-1, 1), solver='anderson')
0.0
```

Be careful with symmetric functions:

```
>>> findroot(lambda x: x**2, (-1, 1), solver='anderson')
Traceback (most recent call last):
    ...
ZeroDivisionError
```

It fails even for better starting points, because there is no sign change:

```
>>> findroot(lambda x: x**2, (-1, .5), solver='anderson')
Traceback (most recent call last):
    ...
ValueError: Could not find root within given tolerance. (1.0 > 2.1684043449710088680 1e-19)
Try another starting point or tweak arguments.
```

5.4.5 Muller algorithm

`ctx.muller`(*f*, *x0*, *solver='secant'*, *tol=None*, *verbose=False*, *verify=True*, ***kwargs*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Find a solution to $f(x) = 0$, using *x0* as starting point or interval for *x*.

1d-solver generating pairs of approximative root and error. See also: Wikipedia [1088].

Needs starting points x0, x1 and x2 close to the root. x1 defaults to x0 + 0.25; x2 to x1 + 0.25. Uses Muller's method that converges towards complex roots.

Pro:

- converges fast (somewhat faster than secant)
- can find complex roots

Contra:

- converges slowly for multiple roots
- may have complex values for real starting points and real roots

Complex roots

For complex roots it's recommended to use Muller's method as it converges even for real starting points very fast:

```
>>> findroot(lambda x: x**4 + x + 1, (0, 1, 2), solver='muller')
(0.727136084491197 + 0.934099289460529j)
```

5.4.6 Ridder algorithm

`ctx.ridder`(*f*, *x0*, *solver='secant'*, *tol=None*, *verbose=False*, *verify=True*, ***kwargs*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Find a solution to $f(x) = 0$, using *x0* as starting point or interval for *x*.

1d-solver generating pairs of approximative root and error. See also: Wikipedia [1094].

Ridders' method to find a root of f in [a, b]. Is told to perform as well as Brent's method (see Wikipedia [1081]) while being simpler.

Pro:

- very fast
- simpler than Brent's method

Contra:

- two function evaluations per step
- has problems with multiple roots
- needs sign change

Finally, a useful application is to compute inverse functions, such as the Lambert W function which is the inverse of we^w, given the first term of the solution's asymptotic expansion as the initial value. In basic cases, this gives identical results to mpmath's built-in `lambertw` function:

```
>>> def lambert(x):
...     return findroot(lambda w: w*exp(w) - x, log(1+x))
...
>>> mp.dps = 15
```

(continues on next page)

(continued from previous page)

```
>>> lambert(1); lambertw(1)
0.567143290409784
0.567143290409784
>>> lambert(1000); lambert(1000)
5.2496028524016
5.2496028524016
```

5.4.7 Brent algorithm (to be implemented from Scipy brent)

`ctx.brent`(*f*, *x0*, *solver='secant'*, *tol=None*, *verbose=False*, *verify=True*, ***kwargs*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Find a solution to $f(x) = 0$, using *x0* as starting point or interval for x.

5.4.8 Newton algorithm

`ctx.newton_c`(*f*, *x0*, *solver='secant'*, *tol=None*, *verbose=False*, *verify=True*, ***kwargs*)

where `ctx` is `dec`, `mpm`, or `gmp`.

1d-solver generating pairs of approximative root and error. See also Wikipedia [1089], MathWorld [803].

Needs starting points x0 close to the root.

Pro:

- converges fast
- sometimes more robust than secant with bad second starting point

Contra:

- converges slowly for multiple roots
- needs first derivative
- 2 function evaluations per iteration

Multiple roots

For multiple roots all methods of the Newtonian family (including secant) converge slowly. Consider this example:

```
>>> f = lambda x: (x - 1)**99
>>> findroot(f, 0.9, verify=False)
0.918073542444929
```

Even for a very close starting point the secant method converges very slowly. Use `verbose=True` to illustrate this.

5.4.9 Newton-Steffenson algorithm (ANewton)

`ctx.newton_steffenson_c`(*f*, *x0*, *solver='secant'*, *tol=None*, *verbose=False*, *verify=True*, ***kwargs*)

where `ctx` is `dec`, `mpm`, or `gmp`.

EXPERIMENTAL 1d-solver generating pairs of approximative root and error.

Uses Newton's method modified to use Steffensens method when convergence is slow. (I.e. for multiple roots.)

Steffensen's method for quadratic convergence of a linear converging sequence. See also Wikipedia [1096]. Don not use it for higher rates of convergence. It may even work for divergent sequences.

Definition: F(x) = (x*f(f(x)) - f(x)**2) / (f(f(x)) - 2*f(x) + x)

Multiple roots

For multiple roots all methods of the Newtonian family (including secant) converge slowly. Consider this example:

```
>>> f = lambda x: (x - 1)**99
>>> findroot(f, 0.9, verify=False)
0.918073542444929
```

Even for a very close starting point the secant method converges very slowly. Use `verbose=True` to illustrate this.

Alternatively you can use an experimental Newtonian solver that keeps track of the speed of convergence and accelerates it using Steffensen's method if necessary:

```
>>> findroot(f, -10, solver='anewton', verbose=True)
x:     -9.8888888888888888889
error: 0.11111111111111111111
converging slowly
x:     -9.7789001122334455667 8
error: 0.10998877665544332211
converging slowly
x:     -9.67002233332199662166
error: 0.10887778911448945119
converging slowly
accelerating convergence
x:     -9.562244329955107766 9
error: 0.10777800336688885476 4
converging slowly
x:     0.99999999999999999214
error: 10.562244329955107759
x:     1.0
error: 7.859830475809466421 3e-18
ZeroDivisionError: canceled with x = 1.0
1.0
```

5.4.10 Modified Newton algorithm (MNewton)

`ctx.mnewton_c`(*f*, *x0*, *solver='secant'*, *tol=None*, *verbose=False*, *verify=True*, ***kwargs*)

where `ctx` is `dec`, `mpm`, or `gmp`.

1d-solver generating pairs of approximative root and error. See also: Wikipedia [1089].

Needs starting point x0 close to the root. Uses modified Newton's method that converges fast regardless of the multiplicity of the root.

Pro:

- converges fast for multiple roots

Contra:

- needs first and second derivative of f
- 3 function evaluations per iteration

Multiple roots

For multiple roots all methods of the Newtonian family (including secant) converge slowly. Consider this example:

```
>>> f = lambda x: (x - 1)**99
>>> findroot(f, 0.9, verify=False)
0.918073542444929
```

Even for a very close starting point the secant method converges very slowly. Use `verbose=True` to illustrate this.

It is possible to modify Newton's method to make it converge regardless of the root's multiplicity:

```
>>> findroot(f, -10, solver='mnewton')
1.0
```

5.4.11 Halley algorithm

ctx.**halley_c**(*f*, *x0*, *solver='secant'*, *tol=None*, *verbose=False*, *verify=True*, ***kwargs*)

where ctx is dec, mpm, or gmp.

1d-solver generating pairs of approximative root and error. See also: Wikipedia [1086], MathWorld [798].

Needs a starting point x0 close to the root. Uses Halley's method with cubic convergence rate.

Pro:

- converges even faster the Newton's method
- useful when computing with *many* digits

Contra:

- needs first and second derivative of f
- 3 function evaluations per iteration
- converges slowly for multiple roots

5.4.12 Roots of a vector function (MDNewton, to be implemented)

ctx.**md_newton_c**(*f*, *x0*, *solver='secant'*, *tol=None*, *verbose=False*, *verify=True*, ***kwargs*)

where ctx is dec, mpm, or gmp.

Find the root of a vector function numerically using Newton's method.

f is a vector function representing a nonlinear equation system.

x0 is the starting point close to the root.

J is a function returning the Jacobian matrix for a point.

Supports overdetermined systems.

Use the 'norm' keyword to specify which norm to use. Defaults to max-norm. The function to calculate the Jacobian matrix can be given using the keyword 'J'. Otherwise it will be calculated numerically.

Please note that this method converges only locally. Especially for high- dimensional systems it is not trivial to find a good starting point being close enough to the root.

Multidimensional functions are also supported:

```
>>> f = [lambda x1, x2: x1**2 + x2,
...      lambda x1, x2: 5*x1**2 - 3*x1 + 2*x2 - 3]
>>> findroot(f, (0, 0))
[-0.618033988749895]
[-0.381966011250105]
>>> findroot(f, (10, 10))
[ 1.61803398874989]
[-2.61803398874989]
```

You can verify this by solving the system manually.

Please note that the following (more general) syntax also works:

```
>>> def f(x1, x2):
...     return x1**2 + x2, 5*x1**2 - 3*x1 + 2*x2 - 3
...
>>> findroot(f, (0, 0))
[-0.618033988749895]
[-0.381966011250105]
```

See also: https://numerary.readthedocs.io/en/latest/newton-method.html

See also: https://en.wikipedia.org/wiki/Newton%27s_method#Systems_of_equations

See also powel hybrid method

See also: https://github.com/mateuv/MetodosNumericos/blob/master/python/NumericalMethodsInEngineeringWithPython/goldSearch.py

See also: https://github.com/mateuv/MetodosNumericos/blob/master/python/NumericalMethodsInEngineeringWithPython/powell.py

5.4.13 Levenberg-Marquardt algorithm

`ctx.levenberg_marquardt_c`(*f*, *x0*, *solver='secant'*, *tol=None*, *verbose=False*, *verify=True*, ***kwargs*)

where `ctx` is `dec`, `mpm`, or `gmp`.

See also: https://lmfit.github.io/lmfit-py/

See also: https://github.com/lmfit/lmfit-py/tree/master

5.4.14 BFGS algorithm.

`ctx.bfgs_c`(*f*, *x0*, *solver='secant'*, *tol=None*, *verbose=False*, *verify=True*, ***kwargs*)

where `ctx` is `dec`, `mpm`, or `gmp`.

See also: https://medium.com/@tru11631/bfgs-and-l-bfgs-with-code-2fcaeee7b225

5.4.15 L-BFGS algorithm.

`ctx.lbfgs_c`(*f*, *x0*, *solver='secant'*, *tol=None*, *verbose=False*, *verify=True*, ***kwargs*)

where `ctx` is `dec`, `mpm`, or `gmp`.

See also: https://medium.com/@tru11631/bfgs-and-l-bfgs-with-code-2fcaeee7b225

5.4.16 Conjugate gradient.

`ctx.conj_grad_c`(*f*, *x0*, *solver='secant'*, *tol=None*, *verbose=False*, *verify=True*, ***kwargs*)

where `ctx` is `dec`, `mpm`, or `gmp`.

See also: https://gregorygundersen.com/blog/2022/03/20/conjugate-gradient-descent/

See also: https://indrag49.github.io/Numerical-Optimization/conjugate-gradient-methods-1.html

See also: https://indrag49.github.io/Numerical-Optimization/conjugate-gradient-methods-1.html#nonlinear-conjugate-gradient-algorithm

See also: https://en.wikipedia.org/wiki/Nonlinear_conjugate_gradient_method

5.5 DAMath: Numerical Quadrature

For a general overview, see: Wikipedia [1090], Wikipedia [1097], MathWorld [797], Wikipedia [1077].

5.5.1 General error codes for Amath integration functions, type 1

Amath integration functions which are NOT using the double exponential transformation return an error code `ier`, which has the following meaning:

`ier = 0`: Normal and reliable termination of the routine. It is assumed that the requested accuracy has been achieved.

`ier > 0`: Abnormal termination of the routine the estimates for integral and error are less reliable. It is assumed that the requested accuracy has not been achieved.

`ier = 1`: Maximum number of subdivisions allowed has been achieved. One can allow more subdivisions by increasing the value of limit (and taking the according dimension adjustments into account). However, if this yields no improvement it is advised to analyze the integrand in order to determine the integration difficulties. If the position of a local difficulty can be determined (e.g. singularity, discontinuity within the interval) one will probably gain from splitting up the interval at this point and calling the integrator on the subranges. If possible, an appropriate special-purpose integrator should be used, which is designed for handling the type of difficulty involved.

`ier = 2`: The occurrence of roundoff error is detected, which prevents the requested tolerance from being achieved. The error may be under-estimated.

`ier = 3`: Extremely bad integrand behaviour occurs at some points of the integration interval.

`ier = 4`: The algorithm does not converge. Roundoff error is detected in the extrapolation table. It is presumed that the requested tolerance cannot be achieved, and that the returned result is the best which can be obtained.

`ier = 5`: The integral is probably divergent, or slowly convergent. It must be noted that divergence can occur with any other value of ier.

`ier = 6`: The input is invalid, because epsabs <= 0 and epsrel < 50*eps_d. result, abserr, last are set to zero.

`ier = 7`: The input is invalid, limit < 0 or limit > QMAXLIM. result, abserr, last are set to zero.

`ier = 8`: Dynamic list vectors cannot be allocated. result, abserr, last are set to zero.

`ier = 9`: At least one limit a or b is NaN, or infinite a=b. result, abserr, last are set to NaN_d.

5.5.2 General error codes for Amath integration functions, type 2

Amath integration functions which are using the double exponential transformation return an error code `ier`, which has the following meaning:

`ier = 0`: Normal and reliable termination of the routine. It is assumed that the requested accuracy has been achieved.

`ier > 0`: Abnormal termination of the routine the estimates for integral and error are less reliable. It is assumed that the requested accuracy has not been achieved.

`ier = 1`: eps < 8*eps_x.

`ier = 2`: roundoff problems.

`ier = 3`: max. iterations, result/abserr have values.

5.5.3 Global adaptive quadrature by Forsythe, Malcolm, Moler (quanc8)

`ctx.quanc8`(*f*, *a*, *b*, *epsabs*, *epsrel*, *limit*)

where `ctx` is `math53`. Performs a global adaptive quadrature of f over (a,b) based on a Fortran subroutine by Forsythe, Malcolm, Moler.

Parameters

- **f** – the function for which the integral is determined.
- **a** – the left border of the integration interval.
- **b** – the right border of the integration interval.
- **abserr** – the absolute accuracy requested.
- **relerr** – the relative accuracy requested.

Returns

a tuple (*integral, err, flag, neval*), where *integral* is an approximation to the integral; *abserr* is an estimate of of the modulus of the absolute error; *neval* is the number of integrand evaluations; and *ier* is the error code (success=0, error > 0: see *General error codes for Amath integration functions, type 1*).

Include reference to Forsythe, Malcolm, Moler.

The routine in Python:

```
>>> from xlcalcnet import math53
>>> a = 0.0; b = 2.0; epsabs = 1E-8; epsrel = 0.0; limit = 0
>>> f = lambda x: ereal.Exp(-x * x / 2)
>>> result, abserr, neval, ier = ereal.Qags(f, a, b, epsabs, epsrel, limit)
>>> print("result: ", result, "abserr: ", abserr)
>>> print("neval: ", neval, "ier: ", ier)
```

5.5.4 21-point Gauss-Kronrod rule, finite interval (qags)

`ctx.qags`(*f*, *a*, *b*, *epsabs*, *epsrel*, *limit*)

where `ctx` is `math53`. Performs a global adaptive quadrature of f over (a,b) based on 21-point Gauss-Kronrod rule for the subintervals, with acceleration by Wynn's epsilon algorithm.

Parameters

- **f** – the function for which the integral is determined.
- **a** – the left border of the integration interval.
- **b** – the right border of the integration interval.
- **epsabs** – the absolute accuracy requested.
- **epsrel** – the relative accuracy requested.
- **limit** – upperbound on the no. of subintervals, 0: use DefLimit.

Returns

a tuple (*integral, abserr, neval, ier*), where *integral* is an approximation to the integral; *abserr* is an estimate of of the modulus of the absolute error; *neval* is the number of integrand evaluations; and *ier* is the error code (success=0, error > 0: see *General error codes for Amath integration functions, type 1*).

See also: Piessens *et al.* [468], Wikipedia [1091], Wikipedia [1105].

The routine in Python:

```
>>> from xlcalcnet import math53
>>> a = 0.0; b = 2.0; epsabs = 1E-8; epsrel = 0.0; limit = 0
>>> f = lambda x: ereal.Exp(-x * x / 2)
>>> result, abserr, neval, ier = ereal.Qags(f, a, b, epsabs, epsrel, limit)
>>> print("result: ", result, "abserr: ", abserr)
>>> print("neval: ", neval, "ier: ", ier)
```

5.5.5 15-point Gauss-Kronrod rule, infinite interval (qagi)

`ctx.qagi`(*f*, *bound*, *inf*, *epsabs*, *epsrel*, *limit*)

where `ctx` is `math53`. Performs a global adaptive quadrature of f over an infinite interval based on a transformed 15-point Gauss-Kronrod for the subintervals, with acceleration by Wynn's epsilon algorithm.

Parameters

- **f** – the function for which the integral is determined.
- **bound** – finite bound of integration range (if any).
- **inf** – indicating the kind of integration range involved: 1 corresponds to (bound, +infinity), -1 to (-infinity, bound), 2 to (-infinity, +infinity).
- **epsabs** – the absolute accuracy requested.
- **epsrel** – the relative accuracy requested.
- **limit** – upperbound on the no. of subintervals, 0: use DefLimit.

Returns

a tuple (*integral, abserr, neval, ier*), where *integral* is an approximation to the integral; *abserr* is an estimate of of the modulus of the absolute error; *neval* is the number of integrand evaluations; and *ier* is the error code (success=0, error > 0: see *General error codes for Amath integration functions, type 1*).

See also: Piessens *et al.* [468], Wikipedia [1091].

The routine in Python:

```
>>> from xlcalcnet import math53
>>> bound = 0.0; infcode = 2; epsabs = 1E-8; epsrel = 0.0; limit = 0
>>> f = lambda x: ereal.Exp(-x * x / 2)
>>> result, abserr, neval, ier = ereal.Qagi(f, bound, infcode, epsabs, epsrel, limit)
>>> print("result: ", result, "abserr: ", abserr)
>>> print("neval: ", neval, "ier: ", ier)
```

5.5.6 Cauchy principal value, finite interval (qawc)

`ctx.qawc`(*f*, *a*, *b*, *c*, *epsabs*, *epsrel*, *limit*)

where `ctx` is `math53`. Performs an adaptive quadrature of $f(x)/(x-c)$ over the finite interval (a, b) with the singularity at c and c not equal a or b. The routine calculates an approximation result to the Cauchy principal value.

Parameters

- **f** – the function for which the integral is determined.
- **a** – the left border of the integration interval.
- **b** – the right border of the integration interval.
- **c** – singularity, ier=6 if $c = a$ or $c = b$.
- **epsabs** – the absolute accuracy requested.
- **epsrel** – the relative accuracy requested.
- **limit** – upperbound on the no. of subintervals, 0: use DefLimit.

Returns

a tuple (*integral, abserr, neval, ier*), where *integral* is an approximation to the integral; *abserr* is an estimate of of the modulus of the absolute error; *neval* is the number of integrand evaluations; and *ier* is the error code (success=0, error > 0: see *General error codes for Amath integration functions, type 1*).

See also: https://maxima.sourceforge.io/docs/manual/maxima_100.html

See also: Piessens *et al.* [468], Wikipedia [1091], Wikipedia [1100].

The routine in Python:

```
# Qawc Example is missing
bound = 0.0; infcode = 2; epsabs = 1E-8; epsrel = 0.0; limit = 0
f = lambda x: ereal.Exp(-x * x / 2)
result, abserr, neval, ier = ereal.Qagi(f, bound, infcode, epsabs, epsrel, limit)
print("ereal.Qagi")
print("result: ", result, "abserr: ", abserr)
print("neval: ", neval, "ier: ", ier)
print()
```

5.5.7 Double Exponential (DE) transformation, finite interval (intde)

`ctx.intde`(*f*, *a*, *b*, *eps*)

where `ctx` is `math53`. Performs an automatic quadrature of f(x) over the finite interval (a,b)} using Double Exponential (DE) transformation.

Parameters

- **f** – the function for which the integral is determined.
- **a** – the left border of the integration interval.
- **b** – the right border of the integration interval.
- **eps** – the relative accuracy requested.

Returns

a tuple (*integral, abserr, neval, ier*), where *integral* is an approximation to the integral, if ier=0 or 3; *abserr* is an estimate of of the modulus of the absolute error, if ier=0 or 3; *neval* is the number of integrand evaluations; and *ier* is the error code (success=0, error > 0: see *General error codes for Amath integration functions, type 2*).

See also: Wikipedia [1114], Takahasi and Mori [509], Ooura and M. [447], Mori [414].

The routine in Python:

```
>>> from xlcalcnet import math53
>>> a = 0.0; b = 2.0; eps = 1E-8
>>> f = lambda x: ereal.Exp(-x * x / 2)
>>> result, abserr, neval, ier = ereal.Intde(f, a, b, eps)
>>> print("result: ", result, "abserr: ", abserr)
>>> print("neval: ", neval, "ier: ", ier)
```

5.5.8 DE transformation, infinite interval, no oscillatory factor (intdei)

`ctx.intdei`(*f*, *a*, *eps*)

where `ctx` is `math53`. Performs an automatic quadrature of f(x) over (a,INF) using Double Exponential transformation when f(x) has no oscillatory factor.

Parameters

- **f** – the function for which the integral is determined.
- **a** – the left border of the integration interval.
- **eps** – the relative accuracy requested.

Returns

a tuple (*integral, abserr, neval, ier*), where *integral* is an approximation to the integral, if ier=0 or 3; *abserr* is an estimate of of the modulus of the absolute error, if ier=0 or 3; *neval* is the number of integrand evaluations; and *ier* is the error code (success=0, error > 0: see *General error codes for Amath integration functions, type 2*).

See also: Wikipedia [1114], Takahasi and Mori [509], Ooura and M. [447], Mori [414].

The routine in Python:

```
>>> from xlcalcnet import math53
>>> a = 0.0; eps = 1E-8
>>> f = lambda x: ereal.Exp(-x * x / 2)
>>> result, abserr, neval, ier = ereal.Intdei(f, a, eps)
>>> print("result: ", result, "abserr: ", abserr)
>>> print("neval: ", neval, "ier: ", ier)
```

5.5.9 DE transformation, infinite interval, oscillatory factor (intdeo)

`ctx.intdeo`(*f*, *a*, *omega*, *eps*)

where `ctx` is `math53`. Performs an automatic quadrature of f(x) over (a,INF) using Double Exponential transformation when f(x) has an oscillatory factor.

Parameters

- **f** – the function for which the integral is determined.
- **a** – the left border of the integration interval.
- **omega** – oscillatory factor.
- **eps** – the relative accuracy requested.

Returns

a tuple (*integral, abserr, neval, ier*), where *integral* is an approximation to the integral, if ier=0 or 3; *abserr* is an estimate of of the modulus of the absolute error, if ier=0 or 3; *neval* is the number of integrand evaluations; and *ier* is the error code (success=0, error > 0: see *General error codes for Amath integration functions, type 2*).

See also: Wikipedia [1114], Takahasi and Mori [509], Ooura and M. [447], Mori [414].

The routine in Python:

```
# Intdeo example is missing
a = 0.0; eps = 1E-8
f = lambda x: ereal.Exp(-x * x / 2)
result, abserr, neval, ier = ereal.Intdei(f, a, eps)
print("ereal.Intdei")
print("result: ", result, "abserr: ", abserr)
print("neval: ", neval, "ier: ", ier)
return "0"
```

5.6 Boost/Math: Numerical integration

For a general overview, see: Wikipedia [1090], Wikipedia [1097].

5.6.1 Trapezoidal Quadrature

`ctxboost.Trapezoidal`(*f*, *a*, *b*, *tol*, *max_refinements*)

where `ctx` is `ctxboost`.

Parameters

- **`f`** – the function for which the integral is determined.
- **`a`** – the left border of the integration interval.
- **`b`** – the right border of the integration interval.
- **`tol`** – the requested tolerance.
- **`max_refinements`** – the maximal number of refinements. The default is 12.

Returns

a tuple (*integral, error, L1*), where *integral* is an approximation to the integral, using a trapezoidal quadrature; *error* is an estimate of the error; and *L1* is an estimate of the L1 value.

See also: BoostMath [49], Wikipedia [1115].

If we assume only that the integrand is twice continuously differentiable, we can prove that the error of the composite trapezoidal rule is O(h2). Hence halving the interval only cuts the error by about a fourth, which in turn implies that we must evaluate the function many times before an acceptable accuracy can be achieved.

However, the trapezoidal rule has an astonishing property: If the integrand is periodic, and we integrate it over a period, then the trapezoidal rule converges faster than any power of the step size h. This can be seen by examination of the Euler-Maclaurin summation formula, which relates a definite integral to its trapezoidal sum and error terms proportional to the derivatives of the function at the endpoints and the Bernoulli numbers. If the derivatives at the endpoints are the same or vanish, then the error very nearly vanishes. Hence the trapezoidal rule is essentially optimal for periodic integrands.

Other classes of integrands which are integrated efficiently by this method are the bump functions and bell-shaped integrals over the infinite interval. For details, see Trefethen's SIAM review.

The routine in Python:

```
>>> from xlcalcnet import math53
>>> f = lambda x: 1 / (5 - 4 * ereal.Cos(x))
>>> result2 = ereal.Trapezoidal(f, a, b)
>>> print("res: ", res)
```

```
boost.trapezoidal(f6, a, b, tol)
result:  1.3639170485190606
```

5.6.2 Gauss-Legendre quadrature

`ctxboost.GaussLegendre`(*f*, *a*, *b*)

where `ctx` is `ctxboost`.

Parameters

- **f** – the function for which the integral is determined.
- **a** – the left border of the integration interval.
- **b** – the right border of the integration interval.

Returns

a tuple (*integral, L1*), where *integral* is an approximation to the integral, using a non-adaptive Gauss-Legendre quadrature; and *L1* is an estimate of the L1 value.

See also: Wikipedia [1107], BoostMath [45].

This is intentionally a very simple quadrature routine, it obtains no estimate of the error, and is not adaptive, but is very efficient in simple cases that involve integrating smooth "bell like" functions and functions with rapidly convergent power series.

The Gaussian quadrature routine support both real and complex-valued quadrature.

Internally class gauss has pre-computed tables of abscissa and weights for 7, 15, 20, 25 and 30 points at up to 100-decimal digit precision. That means that using for example, gauss<double, 30>::integrate incurs absolutely zero set-up overhead from computing the abscissa/weight pairs. When using multiprecision types with less than 100 digits of precision, then there is a small initial one time cost, while the abscissa/weight pairs are constructed from strings.

However, for types with higher precision, or numbers of points other than those given above, the abscissa/weight pairs are computed when first needed and then cached for future use, which does incur a noticeable overhead.

The routine in Python:

```
>>> from xlcalcnet import math53
>>> a = 0.0; b = 1.0; tol = 1.0E-9
>>> f = lambda x: x * x * ereal.Atan(x)
>>> res = ereal.GaussLegendre(f, a, b)
>>> print("res: ", res)
```

```
boost.gauss_legendre(f6, a, b, tol)
result:  14.0
```

5.6.3 Gauss-Kronrod Quadrature

ctxboost.**GaussKronrod**(*f*, *a*, *b*, *max_depth*, *tol*)

where ctx is ctxboost.

Parameters

- **f** – the function for which the integral is determined.
- **a** – the left border of the integration interval.
- **b** – the right border of the integration interval.
- **max_depth** – the maximal number of levels.
- **tol** – the requested tolerance.

Returns

a tuple (*integral, error, L1*), where *integral* is an approximation to the integral, using a Gauss-Kronrod quadrature; *error* is an estimate of the error; and *L1* is an estimate of the L1 value.

See also: Wikipedia [1105], BoostMath [44].

The idea behind Gaussian quadrature is to choose n nodes and weights in such a way that polynomials of order 2n-1 are integrated exactly. However, integration of polynomials is trivial, so it is rarely done via numerical methods. Instead, transcendental and numerically defined functions are integrated via Gaussian quadrature, and the defining problem becomes how to estimate the remainder. Gaussian quadrature alone (without some form of interval splitting) cannot answer this question.

It is possible to compute a Gaussian quadrature of order n and another of order (say) 2n+1, and use the difference as an error estimate. However, this is not optimal, as the zeros of the Legendre polynomials (nodes of the Gaussian quadrature) are never the same for different orders, so 3n+1 function evaluations must be performed. Kronrod considered the problem of how to interleave nodes into a Gaussian quadrature in such a way that all previous function evaluations can be reused, while increasing the order of polynomials that can be integrated exactly. This allows an a posteriori error estimate to be provided while still preserving exponential convergence. Kronrod discovered that by adding n+1 nodes (computed from the zeros of the Legendre-Stieltjes polynomials) to a Gaussian quadrature of order n, he could integrate polynomials of order 3n+1.

The integration routines provided here will perform either adaptive or non-adaptive quadrature, they should be chosen for the integration of smooth functions with no end point singularities.

The number of points specified in the Points template parameter must be an odd number: giving a (N-1)/2 Gauss quadrature as the comparison for error estimation.

Internally class gauss_kronrod has pre-computed tables of abscissa and weights for 15, 31, 41, 51 and 61 Gauss-Kronrod points at up to 100-decimal digit precision. That means that using for example, gauss_kronrod<double, 31>::integrate incurs absolutely zero set-up overhead from computing the abscissa/weight pairs. When using multiprecision types with less than 100 digits of precision, then there is a small initial one time cost, while the abscissa/weight pairs are constructed from strings.

The Gauss-Kronrod quadrature support integrands defined on the real line and returning complex values. In this case, the template argument is the real type, and the complex type is deduced via the return type of the function.

The routine in Python:

```
>>> from xlcalcnet import math53
>>> a = 0.0; b = float('+inf')
>>> f = lambda x: ereal.Exp(-x * x / 2)
>>> result3 = ereal.GaussKronrod(f, a, b)
>>> print("result3: ", result3)
```

```
boost.gauss_kronrod(f6, a, b, max_depth, tol)
result:  14.000000000000002
```

5.6.4 Double-exponential quadrature: tanh_sinh

ctxboost.**TanhSinh**(*f*, *a*, *b*, *tol*, *max_refinements*)

where ctx is ctxboost.

Parameters

- **f** – the function for which the integral is determined.
- **a** – the left border of the integration interval.
- **b** – the right border of the integration interval.
- **tol** – the requested tolerance.
- **max_refinements** – the maximal number of refinements. The default is 12.

Returns

a tuple (*integral, error, L1, levels*), where *integral* is an approximation to the integral, using a tanh-sinh quadrature; *error* is an estimate of the error; *L1* is an estimate of the L1 value; and *levels* is the number of levels used.

See also: Wikipedia [1114], BoostMath [42], Okayama *et al.* [428], Okayama [429].

The tanh-sinh quadrature routine provided by boost is a rapidly convergent numerical integration scheme for holomorphic integrands. By this we mean that the integrand is the restriction to the real line of a complex-differentiable function which is bounded on the interior of the unit disk $|z| < 1$, so that it lies within the so-called Hardy space. If your integrand obeys these conditions, it can be shown that tanh-sinh integration is optimal, in the sense that it requires the fewest function evaluations for a given accuracy of any quadrature algorithm for a random element from the Hardy space.

Complex integrands are supported.

The routine in Python:

```
>>> from xlcalcnet import math53
>>> a = -1.0; b = 1.0
>>> f = lambda x: 5 * x + 7
>>> res = ereal.TanhSinh(f, a, b)
>>> print("res: ", res)
```

```
boost.tanh_sinh(f6, a, b)
result:  14.0
```

5.6.5 Double-exponential quadrature: sinh_sinh

`ctxboost.SinhSinh`(*f*, *tol*, *max_refinements*)

where `ctx` is `ctxboost`.

Parameters

- **f** – the function for which the integral is determined.
- **tol** – the requested tolerance.
- **max_refinements** – the maximal number of refinements. The default is 9.

Returns

a tuple (*integral, error, L1, levels*), where *integral* is an approximation to the integral, using a sinh-sinh quadrature over the limits of integration $(-\infty, \infty)$; *error* is an estimate of the error; *L1* is an estimate of the L1 value; and *levels* is the number of levels used.

See also: BoostMath [41], Okayama *et al.* [428], Okayama [429].

Returns the value of the integral of f over the limits of integration $(-\infty, \infty)$. Complex integrands are supported.

The routine in Python:

```
>>> from xlcalcnet import math53
>>> f = lambda x: math.exp(-x * x)
>>> res = ereal.SinhSinh(f)
>>> print("res: ", res)
```

```
boost.sinh_sinh(f7)
result:  1.7724538509055168
```

5.6.6 Double-exponential quadrature: exp_sinh

ctxboost.**ExpSinh**(*f*, *tol*, *max_refinements*, *a*, *b*)

where ctx is ctxboost.

Parameters

- **f** – the function for which the integral is determined.
- **tol** – the requested tolerance.
- **max_refinements** – the maximal number of refinements. The default is 12.
- **a** – the left border of the integration interval. The default is 0.
- **b** – the right border of the integration interval. The default is $+\infty$. Note that a and b cannot both be finite.

Returns

a tuple (*integral, error, L1, levels*), where *integral* is an approximation to the integral, using a tanh-sinh quadrature; *error* is an estimate of the error; *L1* is an estimate of the L1 value; and *levels* is the number of levels used.

Returns the value of the integral of f over the limits of integration $(0, \infty)$. Complex integrands are supported.

See also: BoostMath [40], Okayama *et al.* [428], Okayama [429].

The routine in Python:

```
>>> from xlcalcnet import math53
>>> f = lambda x: math.exp(-3 * x)
>>> result3 = ereal.ExpSinh(f)
>>> print("result3: ", result3)
```

```
boost.exp_sinh(f8)
result:  0.33333333333333337
```

5.6.7 Fourier Integral, Cosine

`ctxboost.OouraCos`(*f*)

where `ctx` is `ctxboost`.

Parameters
f – the function for which the integral is determined.

Returns
a tuple (*integral, error*), where *integral* is an approximation to the integral, using a Ooura Cos quadrature of the function f in the interval (0, +inf); *error* is an estimate of the error.

See also: BoostMath [43], Ooura and M. [448], Ooura [449].

The routine in Python:

```
>>> from xlcalcnet import math53
>>> f = lambda x: 1 / (x * x + 1)
>>> result3 = ereal.Ooura_Cos(f)
>>> print("result3: ", result3)
```

```
boost.OouraCos(f3, a, b, get_digits, maxit)
x0:  2.9086877250246185e-09
```

5.6.8 Fourier Integral, Sine

`ctxboost.OouraSin(`*f*`)`

where `ctx` is `ctxboost`.

Parameters
f – the function for which the integral is determined.

Returns
a tuple (*integral, error*), where *integral* is an approximation to the integral, using a Ooura Sin quadrature of the function f in the interval (0, +inf); *error* is an estimate of the error.

See also: BoostMath [43], Ooura and M. [448], Ooura [449].

The routine in Python:

```
>>> from xlcalcnet import math53
>>> f = lambda x: 1 / x
>>> result3 = ereal.Ooura_Sin(f)
>>> print("result3: ", result3)
```

```
boost.OouraCos(f3, a, b, get_digits, maxit)
x0:  2.9086877250246185e-09
```

5.6.9 Calculating the pdf from the characteristic function

`ctx.pdf_from_cf_boost(`*x*, *cf*`)`

where `ctx` is `dec`, `mpm`, or `gmp`.

Calculates the pdf as the inverse Fourier transform of its characteristic function.

The PDF of Y is the inverse Fourier transform of its characteristic function,

$$\mathrm{pdf}_X(x) = \frac{1}{2\pi}\int_{-\infty}^{\infty} e^{ity} C_X(t)\mathrm{d}y = \frac{1}{\pi}\int_0^{\infty} \Re\left(e^{-itx} C_X(t)\right)\mathrm{d}t.$$

where $\Re(z)$ denotes the real part of z. We also have

$$\int_0^{\infty} \Re\left(e^{-itx} C_X(t)\right)\mathrm{d}t = \int_0^{\infty} \Re\left(C_X(t)\right)\cos(tx)\mathrm{d}t + \int_0^{\infty} \Im\left(C_X(t)\right)\sin(tx)\mathrm{d}t.$$

Using the right-hand side of this equation allows for efficient use of the quadrature formula of Fillon, with the half-period $\omega = \pi/x$.

5.6.10 Calculating the cdf from the characteristic function

`ctx.cdf_from_cf_continuous_boost(`*x*, *cf*`)`

where `ctx` is `dec`, `mpm`, or `gmp`.

Calculates the cdf from the characteristic function using the procedure of Gil-Pelaez.

Assuming that the characteristic function is absolutely integrable over $(-\infty, \infty)$, Gil-Pelaez derived the following inversion formula which requires integration of a real-valued function only. In particular,

$$\mathrm{cdf}_X(x) = \frac{1}{2} - \frac{1}{2\pi}\int_{-\infty}^{\infty} \frac{e^{-itx}C_X(t) - e^{itx}C_X(t)}{it}\mathrm{d}t = \frac{1}{2} - \frac{1}{\pi}\int_0^{\infty} \Im\left(\frac{e^{-itx}C_X(t)}{t}\right)\mathrm{d}t.$$

where $\Im(z)$ denotes the imaginary part of z. We also have

$$\int_0^{\infty} \Im\left(\frac{e^{-itx}C_X(t)}{t}\right)\mathrm{d}t = \int_0^{\infty} \Im\left(\frac{C_X(t)}{t}\right)\cos(tx)\mathrm{d}t - \int_0^{\infty} \Re\left(\frac{C_X(t)}{t}\right)\sin(tx)\mathrm{d}t.$$

Using the right-hand side of this equation allows for efficient use of the quadrature formula of Fillon, with the half-period $\omega = \pi/x$.

The python code is currently in Charfun.py

The following code provides a test-suite for the numerical inversion of the characteristic function:

```
class tests_charfunc(rv_cont):

    def __init__(self, rv2, x = 5, a = 0, b = 2):

        cdf_value = rv2.cdf(x)
        print ("rv2.cdf(x): ", cdf_value)

        rv2.set_x(x)
        plot(rv2.gil_pelaez_imag, [a, b], points=200)
        print

        rv2.set_x(x)
        plot(rv2.gil_pelaez_cos, [a, b], points=200)
        print

        rv2.set_x(x)
        plot(rv2.gil_pelaez_sin, [a, b], points=200)
        print

        rv2.set_x(x)
        I0 = quad(rv2.gil_pelaez_imag, [0, +inf])
        print("Integral: ", I0)
        result0 = 0.5 - I0/pi
        print("result0:", result0 )
        print("diff0:", result0 - cdf_value)


        rv2.set_x(x)
        I1 =quadosc(rv2.gil_pelaez_cos, [0, inf], period=1*pi/x) # half period
        print("I1:", I1 )

        rv2.set_x(x)
        I2 =quadosc(rv2.gil_pelaez_sin, [0, inf], period=1*pi/x) # half period
        print("I2:", I2 )

        I3 = I1 + I2
        print("I3:", I3 )
        print("Int diff:", I3 - I0)
        result3 = 0.5 - I3/pi
        print("result3:", result3 )
        print("diff3:", result3 - cdf_value)
```

Example: non-central chi-squared distribution

The following code shows the difference between using the generic integration (error: diff0: -6.1218939724378892896e-6) and quadrature for oscillatory functions (error: diff3: 8.4703294725430033907e-22).

```
mp.dps = 20
print()
print ("Hello mpDistributions local ! ")
print()


a = 0.0
b = 2

n = mpf("5")
x = mpf("10")
rv2 = mpr().chisquare(n)
```

(continues on next page)

(continued from previous page)

```
tests_charfunc(rv2, x, a, b)
```

This produces the following output (plots are to be added):

```
Hello mpDistributions local !

rv2.cdf(x):  0.92476475385348782128

Integral:  -1.334418597712864291
result0: 0.92475863195951538339
diff0: -6.1218939724378892896e-6
I1: 0.11817924829245123086
I2: -1.4526170785024453884
I3: -1.3344378302099941575
Int diff: -0.00001923249712986651147 5
result3: 0.92476475385348782128
diff3: 8.4703294725430033907e-22
```

5.7 Mpmath: Numerical integration

5.7.1 General quadrature interface

`ctx.quad`(*f*, **points*, ***kwargs*)

where `ctx` is `dec`, `mpm`, or `gmp`.

See also: Wikipedia [1114]

See also: MathWorld [797].

Computes a single, double or triple integral over a given 1D interval, 2D rectangle, or 3D cuboid. A basic example:

```
>>> from xlcalcnet import *
>>> mp.dps = 15; mp.pretty = True
>>> quad(sin, [0, pi])
2.0
```

A basic 2D integral:

```
>>> f = lambda x, y: cos(x+y/2)
>>> quad(f, [-pi/2, pi/2], [0, pi])
4.0
```

Interval format

The integration range for each dimension may be specified using a list or tuple. Arguments are interpreted as follows:

`quad(f, [x1, x2])` – calculates $\int_{x_1}^{x_2} f(x)\,\mathrm{d}x$

`quad(f, [x1, x2], [y1, y2])` – calculates $\int_{x_1}^{x_2} \int_{y_1}^{y_2} f(x,y)\,\mathrm{d}y\,\mathrm{d}x$

`quad(f, [x1, x2], [y1, y2], [z1, z2])` – calculates $\int_{x_1}^{x_2} \int_{y_1}^{y_2} \int_{z_1}^{z_2} f(x,y,z)\,dz\,\mathrm{d}y\,\mathrm{d}x$

Endpoints may be finite or infinite. An interval descriptor may also contain more than two points. In this case, the integration is split into subintervals, between each pair of consecutive points. This is useful for dealing with mid-interval discontinuities, or integrating over large intervals where the function is irregular or oscillates.

Options

`quad()` recognizes the following keyword arguments:

method
Chooses integration algorithm (described below).

error
If set to true, `quad()` returns (v, e) where v is the integral and e is the estimated error.

maxdegree
Maximum degree of the quadrature rule to try before quitting.

verbose
Print details about progress.

Algorithms

Mpmath presently implements two integration algorithms: tanh-sinh quadrature and Gauss-Legendre quadrature. These can be selected using *method='tanh-sinh'* or *method='gauss-legendre'* or by passing the classes *method=TanhSinh*, *method=GaussLegendre*. The functions `quadts()` and `quadgl()` are also available as shortcuts.

Both algorithms have the property that doubling the number of evaluation points roughly doubles the accuracy, so both are ideal for high precision quadrature (hundreds or thousands of digits).

At high precision, computing the nodes and weights for the integration can be expensive (more expensive than computing the function values). To make repeated integrations fast, nodes are automatically cached.

The advantages of the tanh-sinh algorithm are that it tends to handle endpoint singularities well, and that the nodes are cheap to compute on the first run. For these reasons, it is used by `quad()` as the default algorithm.

Gauss-Legendre quadrature often requires fewer function evaluations, and is therefore often faster for repeated use, but the algorithm does not handle endpoint singularities as well and the nodes are more expensive to compute. Gauss-Legendre quadrature can be a better choice if the integrand is smooth and repeated integrations are required (e.g. for multiple integrals).

See the documentation for `TanhSinh` and `GaussLegendre` for additional details.

Examples of 1D integrals

Intervals may be infinite or half-infinite. The following two examples evaluate the limits of the inverse tangent function ($\int 1/(1+x^2) = \tan^{-1} x$), and the Gaussian integral $\int_{\infty}^{\infty} \exp(-x^2)\,dx = \sqrt{\pi}$:

```
>>> mp.dps = 15
>>> quad(lambda x: 2/(x**2+1), [0, inf])
3.14159265358979
>>> quad(lambda x: exp(-x**2), [-inf, inf])**2
3.14159265358979
```

Integrals can typically be resolved to high precision. The following computes 50 digits of π by integrating the area of the half-circle defined by $x^2 + y^2 \le 1$, $-1 \le x \le 1$, $y \ge 0$:

```
>>> mp.dps = 50
>>> 2*quad(lambda x: sqrt(1-x**2), [-1, 1])
3.1415926535897932384626433832795028841971693993751
```

One can just as well compute 1000 digits (output truncated):

```
>>> mp.dps = 1000
>>> 2*quad(lambda x: sqrt(1-x**2), [-1, 1])
3.14159265358979323846264338327950288419...216420199
```

Complex integrals are supported. The following computes a residue at $z = 0$ by integrating counterclockwise along the diamond-shaped path from 1 to $+i$ to -1 to $-i$ to 1:

```
>>> mp.dps = 15
>>> chop(quad(lambda z: 1/z, [1,j,-1,-j,1]))
(0.0 + 6.28318530717959j)
```

Examples of 2D and 3D integrals

Here are several nice examples of analytically solvable 2D integrals (taken from MathWorld [1]) that can be evaluated to high precision fairly rapidly by `quad()`:

```
>>> mp.dps = 30
>>> f = lambda x, y: (x-1)/((1-x*y)*log(x*y))
>>> quad(f, [0, 1], [0, 1])
0.577215664901532860606512090082
>>> +euler
0.577215664901532860606512090082

>>> f = lambda x, y: 1/sqrt(1+x**2+y**2)
>>> quad(f, [-1, 1], [-1, 1])
3.17343648530607134219175646705
>>> 4*log(2+sqrt(3))-2*pi/3
3.17343648530607134219175646705

>>> f = lambda x, y: 1/(1-x**2 * y**2)
>>> quad(f, [0, 1], [0, 1])
```

(continues on next page)

(continued from previous page)

```
1.233700550136169827355431137498
>>> pi**2 / 8
1.233700550136169827355431137498

>>> quad(lambda x, y: 1/(1-x*y), [0, 1], [0, 1])
1.644934066848226436472415166665
>>> pi**2 / 6
1.644934066848226436472415166665
```

Multiple integrals may be done over infinite ranges:

```
>>> mp.dps = 15
>>> print(quad(lambda x,y: exp(-x-y), [0, inf], [1, inf]))
0.367879441171442
>>> print(1/e)
0.367879441171442
```

For nonrectangular areas, one can call `quad()` recursively. For example, we can replicate the earlier example of calculating π by integrating over the unit-circle, and actually use double quadrature to actually measure the area circle:

```
>>> f = lambda x: quad(lambda y: 1, [-sqrt(1-x**2), sqrt(1-x**2)])
>>> quad(f, [-1, 1])
3.14159265358979
```

Here is a simple triple integral:

```
>>> mp.dps = 15
>>> f = lambda x,y,z: x*y/(1+z)
>>> quad(f, [0,1], [0,1], [1,2], method='gauss-legendre')
0.101366277027041
>>> (log(3)-log(2))/4
0.101366277027041
```

Singularities

Both tanh-sinh and Gauss-Legendre quadrature are designed to integrate smooth (infinitely differentiable) functions. Neither algorithm copes well with mid-interval singularities (such as mid-interval discontinuities in $f(x)$ or $f'(x)$). The best solution is to split the integral into parts:

```
>>> mp.dps = 15
>>> quad(lambda x: abs(sin(x)), [0, 2*pi])   # Bad
3.99900894176779
>>> quad(lambda x: abs(sin(x)), [0, pi, 2*pi])  # Good
4.0
```

The tanh-sinh rule often works well for integrands having a singularity at one or both endpoints:

```
>>> mp.dps = 15
>>> quad(log, [0, 1], method='tanh-sinh')  # Good
-1.0
>>> quad(log, [0, 1], method='gauss-legendre')  # Bad
-0.999932197413801
```

However, the result may still be inaccurate for some functions:

```
>>> quad(lambda x: 1/sqrt(x), [0, 1], method='tanh-sinh')
1.99999999946942
```

This problem is not due to the quadrature rule per se, but to numerical amplification of errors in the nodes. The problem can be circumvented by temporarily increasing the precision:

```
>>> mp.dps = 30
>>> a = quad(lambda x: 1/sqrt(x), [0, 1], method='tanh-sinh')
>>> mp.dps = 15
>>> +a
2.0
```

Highly variable functions

For functions that are smooth (in the sense of being infinitely differentiable) but contain sharp mid-interval peaks or many "bumps", `quad()` may fail to provide full accuracy. For example, with default settings, `quad()` is able to integrate $\sin(x)$ accurately over an interval of length 100 but not over length 1000:

```
>>> quad(sin, [0, 100]); 1-cos(100)   # Good
0.137681127712316
0.137681127712316
>>> quad(sin, [0, 1000]); 1-cos(1000)   # Bad
-37.8587612408485
0.437620923709297
```

One solution is to break the integration into 10 intervals of length 100:

```
>>> quad(sin, linspace(0, 1000, 10))   # Good
0.437620923709297
```

Another is to increase the degree of the quadrature:

```
>>> quad(sin, [0, 1000], maxdegree=10)   # Also good
0.437620923709297
```

Whether splitting the interval or increasing the degree is more efficient differs from case to case. Another example is the function $1/(1+x^2)$, which has a sharp peak centered around $x = 0$:

```
>>> f = lambda x: 1/(1+x**2)
>>> quad(f, [-100, 100])   # Bad
3.64804647105268
>>> quad(f, [-100, 100], maxdegree=10)   # Good
3.12159332021646
>>> quad(f, [-100, 0, 100])   # Also good
3.12159332021646
```

5.7.2 Quadrature with subdivision

`ctx.quadsubdiv`(*f*, *interval*, *tol=None*, *maxintervals=None*, ***kwargs*)

where `ctx` is `mpm` or `dec`.

Computes the integral of f over the interval or path specified by interval, using quad() together with adaptive subdivision of the interval.

This function gives an accurate answer for some integrals where quad() fails:

```
>>> ctx.dps = 15; ctx.pretty = True
>>> ctx.quad(lambda x: abs(ctx.sin(x)), [0, 2*ctx.pi])
3.99900894176779
>>> ctx.quadsubdiv(lambda x: abs(ctx.sin(x)), [0, 2*ctx.pi])
4.0
>>> ctx.quadsubdiv(ctx.sin, [0, 1000])
0.437620923709297
>>> ctx.quadsubdiv(lambda x: 1/(1+x**2), [-100, 100])
3.12159332021646
>>> ctx.quadsubdiv(lambda x: ctx.ceil(x), [0, 100])
5050.0
```

(continues on next page)

(continued from previous page)

```
>>> ctx.quadsubdiv(lambda x: ctx.sin(x+ctx.exp(x)), [0,8])
0.347400172657248
```

The argument *maxintervals* can be set to limit the permissible subdivision:

```
>>> ctx.quadsubdiv(lambda x: ctx.sin(x**2), [0,100], maxintervals=5, error=True)
(-5.40487904307774, 5.011)
>>> ctx.quadsubdiv(lambda x: ctx.sin(x**2), [0,100], maxintervals=100, error=True)
(0.631417921866934, 1.10101120134116e-17)
```

Subdivision does not guarantee a correct answer, since the error estimate on subintervals may be inaccurate:

```
>>> ctx.quadsubdiv(lambda x: ctx.sech(10*x-2)**2 + ctx.sech(100*x-40)**4 \
... + ctx.sech(1000*x-600)**6, [0,1], error=True)
(0.210802735500549, 1.0001111101e-17)
>>> ctx.dps = 20
>>> ctx.quadsubdiv(lambda x: ctx.sech(10*x-2)**2 + ctx.sech(100*x-40)**4 \
... + ctx.sech(1000*x-600)**6, [0,1], error=True)
(0.21080273550054927738, 2.200000001e-24)
```

The second answer is correct. We can get an accurate result at lower precision by forcing a finer initial subdivision:

```
>>> ctx.dps = 15
>>> ctx.quadsubdiv(lambda x: ctx.sech(10*x-2)**2 + ctx.sech(100*x-40)**4 \
... + ctx.sech(1000*x-600)**6, ctx.linspace(0,1,5))
0.210802735500549
```

The following integral is too oscillatory for convergence, but we can get a reasonable estimate:

```
>>> v, err = ctx.quadsubdiv(lambda x: ctx.sin(1/x), [0,1], error=True)
>>> round(v, 6), round(err, 6)
(0.504067, 1e-06)
>>> ctx.sin(1) - ctx.ci(1)
0.504067061906928
```

5.7.3 Quadrature of oscillatory functions (Filon)

`ctx.quadosc`(*f*, *interval*, *omega=None*, *period=None*, *zeros=None*)

where `ctx` is `dec`, `mpm`, or `gmp`.

See also Filon's rule: MathWorld [796]

Calculates

$$I = \int_a^b f(x)\mathrm{d}x$$

where at least one of a and b is infinite and where $f(x) = g(x)\cos(\omega x + \phi)$ for some slowly decreasing function $g(x)$. With proper input, `quadosc()` can also handle oscillatory integrals where the oscillation rate is different from a pure sine or cosine wave.

In the standard case when $|a| < \infty, b = \infty$, `quadosc()` works by evaluating the infinite series

$$I = \int_a^{x_1} f(x)\mathrm{d}x + \sum_{k=1}^{\infty} \int_{x_k}^{x_{k+1}} f(x)\mathrm{d}x$$

where x_k are consecutive zeros (alternatively some other periodic reference point) of $f(x)$. Accordingly, `quadosc()` requires information about the zeros of $f(x)$. For a periodic function, you can specify the zeros by either providing the angular frequency ω (*omega*) or the *period* $2\pi/\omega$. In general, you can specify the n-th zero by providing the *zeros* arguments. Below is an example of each:

```
>>> from xlcalcnet import *
>>> mp.dps = 15; mp.pretty = True
>>> f = lambda x: sin(3*x)/(x**2+1)
>>> quadosc(f, [0,inf], omega=3)
0.37833007080198
>>> quadosc(f, [0,inf], period=2*pi/3)
0.37833007080198
>>> quadosc(f, [0,inf], zeros=lambda n: pi*n/3)
0.37833007080198
>>> (ei(3)*exp(-3)-exp(3)*ei(-3))/2  # Computed by Mathematica
0.37833007080198
```

Note that *zeros* was specified to multiply n by the *half-period*, not the full period. In theory, it does not matter whether each partial integral is done over a half period or a full period. However, if done over half-periods, the infinite series passed to `nsum()` becomes an *alternating series* and this typically makes the extrapolation much more efficient.

Here is an example of an integration over the entire real line, and a half-infinite integration starting at $-\infty$:

```
>>> quadosc(lambda x: cos(x)/(1+x**2), [-inf, inf], omega=1)
1.15572734979092
>>> pi/e
1.15572734979092
>>> quadosc(lambda x: cos(x)/x**2, [-inf, -1], period=2*pi)
-0.0844109505595739
>>> cos(1)+si(1)-pi/2
-0.0844109505595738
```

Of course, the integrand may contain a complex exponential just as well as a real sine or cosine:

```
>>> quadosc(lambda x: exp(3*j*x)/(1+x**2), [-inf,inf], omega=3)
(0.156410688228254 + 0.0j)
>>> pi/e**3
0.156410688228254
>>> quadosc(lambda x: exp(3*j*x)/(2+x+x**2), [-inf,inf], omega=3)
(0.00317486988463794 - 0.0447701735209082j)
>>> 2*pi/sqrt(7)/exp(3*(j+sqrt(7))/2)
(0.00317486988463794 - 0.0447701735209082j)
```

Non-periodic functions

If $f(x) = g(x)h(x)$ for some function $h(x)$ that is not strictly periodic, *omega* or *period* might not work, and it might be necessary to use *zeros*.

A notable exception can be made for Bessel functions which, though not periodic, are "asymptotically periodic" in a sufficiently strong sense that the sum extrapolation will work out:

```
>>> quadosc(j0, [0, inf], period=2*pi)
1.0
>>> quadosc(j1, [0, inf], period=2*pi)
1.0
```

More properly, one should provide the exact Bessel function zeros:

```
>>> j0zero = lambda n: findroot(j0, pi*(n-0.25))
>>> quadosc(j0, [0, inf], zeros=j0zero)
1.0
```

For an example where *zeros* becomes necessary, consider the complete Fresnel integrals

$$\int_0^\infty \cos x^2 \, dx = \int_0^\infty \sin x^2 \, dx = \sqrt{\frac{\pi}{8}}.$$

Although the integrands do not decrease in magnitude as $x \to \infty$, the integrals are convergent since the oscillation rate increases (causing consecutive periods to asymptotically cancel out). These integrals are virtually impossible to calculate to any kind of

accuracy using standard quadrature rules. However, if one provides the correct asymptotic distribution of zeros ($x_n \sim \sqrt{n}$), `quadosc()` works:

```
>>> mp.dps = 30
>>> f = lambda x: cos(x**2)
>>> quadosc(f, [0,inf], zeros=lambda n:sqrt(pi*n))
0.626657068657750125603941321203
>>> f = lambda x: sin(x**2)
>>> quadosc(f, [0,inf], zeros=lambda n:sqrt(pi*n))
0.626657068657750125603941321203
>>> sqrt(pi/8)
0.626657068657750125603941321203
```

(Interestingly, these integrals can still be evaluated if one places some other constant than π in the square root sign.)

In general, if $f(x) \sim g(x)\cos(h(x))$, the zeros follow the inverse-function distribution $h^{-1}(x)$:

```
>>> mp.dps = 15
>>> f = lambda x: sin(exp(x))
>>> quadosc(f, [1,inf], zeros=lambda n: log(n))
-0.25024394235267
>>> pi/2-si(e)
-0.250243942352671
```

Non-alternating functions

If the integrand oscillates around a positive value, without alternating signs, the extrapolation might fail. A simple trick that sometimes works is to multiply or divide the frequency by 2:

```
>>> f = lambda x: 1/x**2+sin(x)/x**4
>>> quadosc(f, [1,inf], omega=1)  # Bad
1.28642190869861
>>> quadosc(f, [1,inf], omega=0.5)  # Perfect
1.28652953559617
>>> 1+(cos(1)+ci(1)+sin(1))/6
1.28652953559617
```

Fast decay

`quadosc()` is primarily useful for slowly decaying integrands. If the integrand decreases exponentially or faster, `quad()` will likely handle it without trouble (and generally be much faster than `quadosc()`):

```
>>> quadosc(lambda x: cos(x)/exp(x), [0, inf], omega=1)
0.5
>>> quad(lambda x: cos(x)/exp(x), [0, inf])
0.5
```

5.7.4 Verified numerical integration (Okayama)

quad_verified(*f*, **points*, ***kwargs*)

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Computes a single integral over a given 1D interval, providing a guaranteed error bound.

This function implements an efficient algorithm for 1-dimensional numerical real integration with rigorous error bounds. See Petras [465], Petras [466] for an overview. The algorithms used in this section have been described in detail in a series of papers by Okayama *et al.* [428], Okayama [427] and Okayama [429], where explicit error bounds for the double exponential formulas proposed by Takahasi and Mori [509] are provided.

See also https://github.com/fredrik-johansson/arb/issues/196 (DH comment on integration, contains better description).

The type of integrals considered is as follows:

$$I = \int_a^b f(x)\mathrm{d}x = \int_a^b \frac{g(x)}{(x-a)^{1-\alpha}(b-x)^{1-\beta}}\mathrm{d}x, \quad \text{where}$$

$$g(x) = f(x)(x-a)^{\alpha-1}(b-x)^{\beta-1}$$

and α and β are positive constants. We assume that the integrand $f(x)$ is a function on an open interval (a, b) and may have an integrable algebraic singularity of the type shown above at the end-points $x = a$ and/or $x = b$. The function f (or the function g) needs to be analytic on the following complex domain $\mathcal{D}$:

$$\mathcal{D} = \left\{ z \in \mathbb{C} : \left| \arg\left[\frac{1}{\pi}\log\left(\frac{z-a}{b-z}\right) + \sqrt{1 + \left(\frac{1}{\pi}\log\left(\frac{z-a}{b-z}\right)\right)^2} \right] \right| < d \right\}$$

where $0 < d < \pi/2$, and satisfy, for some positive constant K, for all $z \in \mathcal{D}$ the condition

$$|f(z)| \leq\ K|z-a|^{\alpha-1}|b-z|^{\beta-1}, \quad \text{or, equivalently,}$$

$$|g(z)| \leq\ K$$

A rigorous upper bound for K, given d (which can be freely chosen observing the condition $0 < d < \pi/2$) can be computed using complex interval arithmetic; details will be discussed below.

For a given choice of d and a positive constant ϵ_{abs}, we have the following key result, which establishes an explicit rigorous bound for the absolute error of the approximation to the integral, provided that all calculations are carried out in real interval arithmetic:

$$\frac{1}{C_1}\left| \int_a^b f(x)\mathrm{d}x - h\sum_{k=-M}^{N} g(\phi(kh))P(kh) \right| \leq \epsilon_{abs}, \quad \text{where}$$

$$\phi(t) = \tanh\left(\frac{\pi}{2}\sinh(t)\right), \quad \text{and}$$

$$P(u) = \frac{\pi}{2}\left(\frac{b-a}{2}\right)^{\alpha+\beta-1}\cosh(u)(1+\phi(u))^{\alpha}(1-\phi(u))^{\beta}$$

Note that in formula ref{eq:KeyIntegrationformula} and in the subsequent formulas C_1, C_2, h, M, N only depend on d and ϵ_{abs} and the function parameters α and β. The number of intervals and the interval width h are automatically chosen in a way which balances the discretization error and the truncation error, resulting in a "nearly optimal" number of function evaluations. C_1, C_2, h, M, N are calculated as follows:

$$C_1 = \frac{2K(b-a)^{\alpha+\beta-1}}{\min(\alpha,\beta)}$$

$$C_2 = \frac{2}{\cos^{\alpha+\beta}\left(\frac{\pi}{2}\sin(d)\right)\cos(d)}$$

$$h = \frac{2\pi d}{\log\left(1+\frac{2C_2}{\epsilon_{abs}}\right)}$$

$$n = \left\lceil \frac{1}{h}\log\left(\frac{2}{\pi\min(\alpha,\beta)}\log\left(\frac{2e^{\max(\alpha,\beta)\pi/2}}{\epsilon_{abs}}\right)\right)\right\rceil$$

$$\begin{cases} M = n, & N = n - \lfloor \log(\beta/\alpha)/h \rfloor, \quad \text{for } \alpha \leq \beta \\ N = n, & M = n - \lfloor \log(\alpha/\beta)/h \rfloor, \quad \text{for } \alpha > \beta \end{cases}$$

The main challenge in implementing the algorithm is to determine a rigorous upper bound for K. We are going to achieve this by using the complex interval arithmetic which is implemented in mpmath. Since the domain $\mathcal{D}$ is not of rectangular shape, we need to compute a rectangular domain, say $\mathcal{D}_{\text{Rect}}$, which includes $\mathcal{D}$: $\mathcal{D} \subset \mathcal{D}_{\text{Rect}}$.

The rectangular domain $\mathcal{D}_{\text{Rect}}$ corresponds to a complex interval, say z_1. The function g is then evaluated in complex interval arithmetic with z_1 as argument: $z_2 = g(z_1)$. The absolute value of z_2 is a real interval, say x_1. The supremum of x_1 is a rigorous upper bound of K (see equation ref{eq:BoundFor_K_G}).

The choice of d has a great impact on $M + N + 1$, the total number of function evaluations, which are required to achieve the desired absolute error. To be able to select a near-optimal value of d resulting in the lowest number of function evaluations, we calculate n for a number of values for d, ranging from $d = 1.5$ to $d = 0.1$, using pre-computed values for the matching rectangular domains $\mathcal{D}_{\text{Rect}}$, and choose the value for d which results in the smallest n.

If equation ref{eq:gFormula} does not give a useful alternative representation of f, we set $\alpha = \beta = 1$, so that $f(x) = g(x)$. However, taking a, b, $\alpha = \frac{1}{2}$ and $\beta = 1$ let us consider the integral

$$I = \int_0^1 \frac{\sin(\exp(x))}{\sqrt{x}}\mathrm{d}x = \int_0^1 f(x)\mathrm{d}x = \int_0^1 \frac{g(x)}{\sqrt{x}}\mathrm{d}x, \text{ i.e}$$

$$f = \frac{\sin(\exp(x))}{\sqrt{x}} \text{ and } g = \sin(\exp(x))$$

In this situation, equation ref{eq:BoundFor_K_F} cannot be used to determine K because $f(z)$ has a singularity at $z = 0$; on the other hand, equation ref{eq:BoundFor_K_G} can still be used because $g(z)$ has no singularities in the interval $(0, 1)$.

It is possible to generalize this methodology to integrals for which $a = -\infty$ and/or $b = +\infty$; details can be found in Okayama (2014). Unfortunately, the resulting domains are of a shape which makes it impossible to include them in a rectangular domain, unless this domain spans the entire complex plane. Therefore, except for very few, extremely well behaved functions, the constant K cannot be determined using complex interval arithmetic (but can possibly be determined by analytical methods). The usual transformation formulas, which are widely used when performing non-verified numerical integration, are not applicable, because they will (almost always) produce a singularity at one of the endpoints, which will prevent the determination of the constant K .

5.7.5 Specialized Gauss quadrature rules

`ctx.gauss_quad_rules`(*ctx*, *n*, *qtype='legendre'*, *alpha=0*, *beta=0*)

where `ctx` is `dec`, `mpm`, or `gmp`.

This routine calulates Gaussian quadrature rules for different families of orthogonal polynomials. Let (a, b) be an interval, W(x) a positive weight function and n a positive integer.

Then the purpose of this routine is to calculate pairs (x_k, w_k) for $k = 0, 1, 2, ...(n - 1)$ which give

$$\int_a^b W(x) * F(x)\mathrm{d}x = \sum_0^{n-1} w_k * F(x_k)$$

exact for all polynomials F(x) of degree (strictly) less than 2*n. For all integrable functions F(x) the sum is (more or less) good approximation to the integral. The x_k are called nodes (which are the zeros of the related orthogonal polynomials) and the w_k are called the weights.

```
parameters
    n        (input) The degree of the quadrature rule, i.e. its number of
             nodes.

    qtype    (input) The family of orthogonal polynmomials for which to
             compute the quadrature rule. See the list below.

    alpha    (input) real number, used as parameter for some orthogonal
             polynomials
```

(continues on next page)

(continued from previous page)

```
    beta     (input) real number, used as parameter for some orthogonal
            polynomials.

return value

    (X, W)    a pair of two real arrays where x_k = X[k] and w_k = W[k].


orthogonal polynomials:

    qtype           polynomial
    -----           ----------

    "legendre"      Legendre polynomials, W(x)=1 on the interval (-1, +1)
    "legendre01"    shifted Legendre polynomials, W(x)=1 on the interval (0, +1)
    "hermite"       Hermite polynomials, W(x)=exp(-x*x) on (-infinity,+infinity)
    "laguerre"      Laguerre polynomials, W(x)=exp(-x) on (0,+infinity)
    "glaguerre"     generalized Laguerre polynomials, W(x)=exp(-x)*x**alpha on (0, +infinity)
    "chebyshev1"    Chebyshev polynomials of the first kind, W(x)=1/sqrt(1-x*x) on (-1, +1)
    "chebyshev2"    Chebyshev polynomials of the second kind, W(x)=sqrt(1-x*x) on (-1, +1)
    "jacobi"        Jacobi polynomials, W(x)=(1-x)**alpha * (1+x)**beta on (-1, +1)
                    with alpha>-1 and beta>-1

references:
  - golub and welsch, "calculations of gaussian quadrature rules", mathematics of
    computation 23, p. 221-230 (1969)
  - golub, "some modified matrix eigenvalue problems", siam review 15, p. 318-334 (1973)
  - stroud and secrest, "gaussian quadrature formulas", prentice-hall (1966)

See also the routine gaussq.f in netlog.org or ACM Transactions on
Mathematical Software algorithm 726.
```

Gauss-Chebyshev quadrature, first and second kind

See also: MathWorld [801], Wikipedia [1106], Gatteschi [342], Petras [465], Petras [466].

See also: https://en.wikipedia.org/wiki/Chebyshev%E2%80%93Gauss_quadrature

See also: https://mathworld.wolfram.com/Chebyshev-GaussQuadrature.html

See also: Abramowitz, p. 383

For the first kind:

$$\int_{-1}^{1} \frac{f(x)}{\sqrt{1-x^2}}\mathrm{d}x = \sum_{i=1}^{n} w_i f(x_i) + R_n, \quad \text{where}$$

$$x_i = \cos\left(\frac{2i-1}{2n}\pi\right), w_i = \frac{\pi}{n}, \quad R_n = \frac{f^{(2n)}(\xi)\pi}{(2n)!2^{2n-1}} \text{ for } -1 < \xi < 1.$$

For the second kind:

$$\int_{-1}^{1} \sqrt{1-x^2} g(x)\mathrm{d}x = \sum_{i=1}^{n} w_i g(x_i) + R_n, \quad \text{where}$$

$$x_i = \cos\left(\frac{i}{n+1}\pi\right), w_i = \frac{\pi}{n+1}\sin^2\left(\frac{i}{n+1}\pi\right), \quad R_n = \frac{g^{(2n)}(\xi)\pi}{(2n)!2^{2n+1}} \text{ for } -1 < \xi < 1.$$

```
def demo_gauss_quadrature_chebyshev(ctx):
    # orthogonality of the chebyshev polynomials:
    f = lambda x: ctx.chebyt(3, x) * ctx.chebyt(2, x) # problem with gpm.chebyt
```

(continues on next page)

(continued from previous page)

```
    X, W = gauss_quadrature(ctx, 3, "chebyshev1")
    A = ctx.fdot([(f(x), w) for x, w in zip(X, W)])
    print("A:", A)
    print(ctx.chop(A, tol = 1e-10))
```

Gauss-Legendre quadrature

See also: MathWorld [802], Wikipedia [1107], Petras [465], Petras [466].

$$\int_a^b f(x)\mathrm{d}x = \frac{b-a}{2}\sum_{i=1}^{n} w_i f\left(\tfrac{1}{2}(b-a)(x_i+1)\right) + R_n, \quad \text{where}$$

$$w_i = \frac{2}{((1-x^2)P_n'(x_i))^2}, \quad R_n = \frac{f^{(2n)}(\xi)(b-a)^{2n+1}(n!)^4}{((2n+1)(2n)!)^3} \text{ for } a < \xi < b,$$

P_n are the Legendre polynomials of degree n, and x_i is the i^{th} zero of P_n.

```
def demo_gauss_quadrature_laguerre_mp():
    from xlcalcnet.mpmath import mp
    f = lambda x: x**5 - 2 * x**4 + 3 * x**3 - 5 * x**2 + 7 * x - 11
    X, W = mp.gauss_quadrature(3, "laguerre")
    A = mp.fdot([(f(x), w) for x, w in zip(X, W)])
    B = 76
    C = mp.quad(lambda x: mp.exp(-x) * f(x), [0, +mp.inf])
    print("A:", A)
    print("B:", B)
    print("C:", C)
    print(mp.chop(A-B, tol = 1e-10), mp.chop(A-C, tol = 1e-10))
```

Gauss-Jacobi quadrature

See also: MathWorld [800], Wikipedia [1104], Petras [465], Petras [466].

$$\int_a^b f(x)(1-x)^\alpha(1+x)^\beta\mathrm{d}x = \frac{b-a}{2}\sum_{i=1}^{n} w_i f\left(\tfrac{1}{2}(b-a)(x_i+1)\right) + R_n, \quad \text{where } \alpha,\beta > -1,$$

$$w_i = -\frac{2n+\alpha+\beta+2}{n+\alpha+\beta+1}\frac{\Gamma(n+\alpha+1)\Gamma(n+\beta+1)}{\Gamma(n+\alpha+\beta+1)(n+1)!}\frac{2^{\alpha+\beta}}{P_n^{(\alpha,\beta)\prime}(x_i)P_{n+1}^{(\alpha,\beta)}(x_i)},$$

$$R_n = \frac{\Gamma(n+\alpha+1)\Gamma(n+\beta+1)\Gamma(n+\alpha+\beta+1)}{(2n+\alpha+\beta+1)[\Gamma(2n+\alpha+\beta+1)]^2}\frac{2^{2+\alpha+\beta+1}}{(2n)!}f^{(2n)}(\xi), \text{ for } a < \xi < b,$$

$P_n^{(\alpha,\beta)}$ are the Jacobi polynomials of degree n, and x_i is the i^{th} zero of $P_n^{(\alpha,\beta)}$.

Gauss-Legendre quadrature is a special case of Gauss-Jacobi quadrature with $\alpha = \beta = 0$. Similarly, the Chebyshev-Gauss quadrature of the first (second) kind arises when one takes $\alpha = \beta = -0.5(+0.5)$. The special case $\alpha = \beta$ turns Jacobi polynomials into Gegenbauer polynomials, in which case the technique is sometimes called Gauss-Gegenbauer quadrature. Gauss-Jacobi quadrature can be used to approximate integrals with singularities at the end points.

```
def demo_gauss_quadrature_laguerre_mp():
    from xlcalcnet.mpmath import mp
    f = lambda x: x**5 - 2 * x**4 + 3 * x**3 - 5 * x**2 + 7 * x - 11
    X, W = mp.gauss_quadrature(3, "laguerre")
    A = mp.fdot([(f(x), w) for x, w in zip(X, W)])
    B = 76
    C = mp.quad(lambda x: mp.exp(-x) * f(x), [0, +mp.inf])
    print("A:", A)
    print("B:", B)
    print("C:", C)
    print(mp.chop(A-B, tol = 1e-10), mp.chop(A-C, tol = 1e-10))
```

Gauss-Laguerre quadrature, classic and generalized

See also: MathWorld [801], Wikipedia [1106], Gatteschi [342], Petras [465], Petras [466].

$$\int_0^\infty e^{-ax} f(x)\mathrm{d}x = \frac{1}{a}\sum_{i=1}^{n} w_i f\left(\frac{x_i}{a}\right) + R_n, \quad \text{where}$$

$$w_i = \frac{x_i}{((n+1)L_{n+1}(x_i))^2}, \quad R_n = \frac{f^{(2n)}(\xi)(n!)^2}{(2n)!} \text{ for } 0 < \xi < \infty,$$

L_n are the Laguerre polynomials of degree n, and x_i is the i^{th} zero of L_n.

```
def demo_gauss_quadrature_laguerre_mp():
    from xlcalcnet.mpmath import mp
    f = lambda x: x**5 - 2 * x**4 + 3 * x**3 - 5 * x**2 + 7 * x - 11
    X, W = mp.gauss_quadrature(3, "laguerre")
    A = mp.fdot([(f(x), w) for x, w in zip(X, W)])
    B = 76
    C = mp.quad(lambda x: mp.exp(-x) * f(x), [0, +mp.inf])
    print("A:", A)
    print("B:", B)
    print("C:", C)
    print(mp.chop(A-B, tol = 1e-10), mp.chop(A-C, tol = 1e-10))
```

Gauss-Hermite quadrature

See also: MathWorld [799], Wikipedia [1103], Townsend *et al.* [782], Petras [465], Petras [466].

$$\int_{-\infty}^\infty e^{-ax^2} f(x)\mathrm{d}x = \frac{1}{\sqrt{a}}\sum_{i=1}^{n} w_i f\left(\frac{x_i}{\sqrt{a}}\right) + R_n, \quad \text{where}$$

$$w_i = \frac{2^{n-1}n!\sqrt{\pi}}{(nH_{n-1}(x_i))^2}, \quad R_n = \frac{f^{(2n)}(\xi)n!\sqrt{\pi}}{2^n(2n)!} \text{ for } -\infty < \xi < \infty,$$

H_n are the Hermite polynomials of degree n, and x_i is the i^{th} zero of H_n.

```
def demo_gauss_quadrature_hermite_mp():
    from xlcalcnet.mpmath import mp
    f = lambda x: x**8 + 2 * x**6 - 3 * x**4 + 5 * x**2 - 7
    X, W = mp.gauss_quadrature(5, "hermite")
    A = mp.fdot([(f(x), w) for x, w in zip(X, W)])
    B = mp.sqrt(mp.pi) * 57 / 16
    C = mp.quad(lambda x: mp.exp(- x * x) * f(x), [-mp.inf, +mp.inf])
    print("A:", A)
    print("B:", B)
    print("C:", C)
    print(mp.chop(A-B, tol = 1e-10), mp.chop(A-C, tol = 1e-10))
```

5.8 Mpmath: Numerical inverse Laplace transform

5.8.1 General inverse Laplace transform interface

`ctx.invertlaplace`(*f*, *t*, ***kwargs*)

where `ctx` is `dec`, `mpm`, or `gmp`.

See also: Cohen [181], Duffy [289], Bellman *et al.* [28], Davies and Martin [201], Duffy [288], Kuhlman [398].

Computes the numerical inverse Laplace transform for a Laplace-space function at a given time. The function being evaluated is assumed to be a real-valued function of time.

The user must supply a Laplace-space function $\bar{f}(p)$, and a desired time at which to estimate the time-domain solution $f(t)$.

Options

`invertlaplace()` recognizes the following optional keywords valid for all methods:

method
Chooses numerical inverse Laplace transform algorithm (described below).

degree
Number of terms used in the approximation

Basic examples

A few basic examples of Laplace-space functions with known inverses (see Abate and Valko [1], Talbot [510]) :

$$\mathcal{L}\left\{f(t)\right\} = \bar{f}(p)$$

$$\mathcal{L}^{-1}\left\{\bar{f}(p)\right\} = f(t)$$

$$\bar{f}(p) = \frac{1}{(p+1)^2}$$

$$f(t) = te^{-t}$$

```
>>> from xlcalcnet import *
>>> mp.dps = 15; mp.pretty = True
>>> tt = [0.001, 0.01, 0.1, 1, 10]
>>> fp = lambda p: 1/(p+1)**2
>>> ft = lambda t: t*exp(-t)
>>> ft(tt[0]),ft(tt[0])-invertlaplace(fp,tt[0],method='talbot')
(0.000999000499833375, 8.57923043561212e-20)
>>> ft(tt[1]),ft(tt[1])-invertlaplace(fp,tt[1],method='talbot')
(0.00990049833749168, 3.27007646698047e-19)
>>> ft(tt[2]),ft(tt[2])-invertlaplace(fp,tt[2],method='talbot')
(0.090483741803596, -1.75215800052168e-18)
>>> ft(tt[3]),ft(tt[3])-invertlaplace(fp,tt[3],method='talbot')
(0.367879441171442, 1.2428864009344e-17)
>>> ft(tt[4]),ft(tt[4])-invertlaplace(fp,tt[4],method='talbot')
(0.000453999297624849, 4.04513489306658e-20)
```

The methods also work for higher precision:

```
>>> mp.dps = 100; mp.pretty = True
>>> nstr(ft(tt[0]),15),nstr(ft(tt[0])-invertlaplace(fp,tt[0],method='talbot'),15)
('0.000999000499833375', '-4.96868310693356e-105')
>>> nstr(ft(tt[1]),15),nstr(ft(tt[1])-invertlaplace(fp,tt[1],method='talbot'),15)
('0.00990049833749168', '1.23032291513122e-104')
```

$$\bar{f}(p) = \frac{1}{p^2+1}$$

$$f(t) = \mathrm{J}_0(t)$$

```
>>> mp.dps = 15; mp.pretty = True
>>> fp = lambda p: 1/sqrt(p*p + 1)
>>> ft = lambda t: besselj(0,t)
>>> ft(tt[0]),ft(tt[0])-invertlaplace(fp,tt[0])
(0.999999750000016, -8.2477943034014e-18)
>>> ft(tt[1]),ft(tt[1])-invertlaplace(fp,tt[1])
(0.99997500015625, -3.69810144898872e-17)
```

$$\bar{f}(p) = \frac{\log p}{p}$$

$$f(t) = -\gamma - \log t$$

```
>>> mp.dps = 15; mp.pretty = True
>>> fp = lambda p: log(p)/p
>>> ft = lambda t: -euler-log(t)
>>> ft(tt[0]),ft(tt[0])-invertlaplace(fp,tt[0],method='stehfest')
(6.3305396140806, -1.92126634837863e-16)
>>> ft(tt[1]),ft(tt[1])-invertlaplace(fp,tt[1],method='stehfest')
(4.02795452108656, -4.81486093200704e-16)
```

Relationship to distribution functions

The concept of Laplace transforms also finds use in the context of statistical distribution functions, although here often the moment generating function $M_X(t)$ is given instead of the Laplace transform $\mathcal{L}\{f(t)\}$. They are related by $\mathcal{L}\{f(t)\} = M_X(-t)$. Note that in the case of statistical distribution functions, neither $M_X(t)$ nor $\mathcal{L}\{f(t)\}$ are guaranteed to exist. If they do, however, they can be used to calculate the pdf and cdf, particularly if the domain of X is $X > 0$.

The Laplace transform (of the pdf)of a nonnegative RV uniquely determines the distribution. Applying the inverse Laplace transform to the Laplace transform of the distribution gives the pdf.

These two transformations, $X \longrightarrow e^{-sX}$ provides the definition of a Laplace transformation:

$$\mathcal{L}[f](s) := \mathrm{E}^{\mathbb{P}}\left[e^{-sX}\right] = \int_{\mathbb{R}} e^{-sx} f_X(x)\mathrm{d}x.$$

Therefore, given a (nonnegative) random variable X and its associated probability density (PDF) $f_X(x)$, we always have the Laplace transform of that density $\mathcal{L}[f_X](s)$ defined at s . But note that this also requires a transformation of the parameter x in to $-s$.

The Laplace transform finds the CDF in the transformed variable s easily:

$$F_X(x) = \mathcal{L}^{-1}\left[\frac{1}{s}\,\mathrm{E}^{\mathbb{P}}\left[e^{-sX}\right]\right](x).$$

Singularities

All numerical inverse Laplace transform methods have problems at large time when the Laplace-space function has poles, singularities, or branch cuts to the right of the origin in the complex plane. For simple poles in $\bar{f}(p)$ at the p-plane origin, the time function is constant in time (e.g., $\mathcal{L}\{1\} = 1/p$ has a pole at $p = 0$). A pole in $\bar{f}(p)$ to the left of the origin is a decreasing function of time (e.g., $\mathcal{L}\left\{e^{-t/2}\right\} = 1/(p + 1/2)$ has a pole at $p = -1/2$), and a pole to the right of the origin leads to an increasing function in time (e.g., $\mathcal{L}\left\{te^{t/4}\right\} = 1/(p - 1/4)^2$ has a pole at $p = 1/4$). When singularities occur off the real p axis, the time-domain function is oscillatory. For example $\mathcal{L}\{\mathrm{J}_0(t)\} = 1/\sqrt{p^2 + 1}$ has a branch cut starting at $p = j = \sqrt{-1}$ and is a decaying oscillatory function, This range of behaviors is illustrated in Duffy [3] Figure 4.10.4, p. 228.

In general as $p \to \infty$ $t \to 0$ and vice-versa. All numerical inverse Laplace transform methods require their abscissa to shift closer to the origin for larger times. If the abscissa shift left of the rightmost singularity in the Laplace domain, the answer will be completely wrong (the effect of singularities to the right of the Bromwich contour are not included in the results).

For example, the following exponentially growing function has a pole at $p = 3$:

$$\bar{f}(p) = \frac{1}{p^2 - 9}$$

$$f(t) = \frac{1}{3}\sinh 3t$$

```
>>> mp.dps = 15; mp.pretty = True
>>> fp = lambda p: 1/(p*p-9)
>>> ft = lambda t: sinh(3*t)/3
>>> tt = [0.01,0.1,1.0,10.0]
>>> ft(tt[0]),invertlaplace(fp,tt[0],method='talbot')
(0.0100015000675014, 0.0100015000675014)
>>> ft(tt[1]),invertlaplace(fp,tt[1],method='talbot')
(0.101506764482381, 0.101506764482381)
>>> ft(tt[2]),invertlaplace(fp,tt[2],method='talbot')
(3.33929164246997, 3.33929164246997)
>>> ft(tt[3]),invertlaplace(fp,tt[3],method='talbot')
(1781079096920.74, -1.61331069624091e-14)
```

Algorithms

Mpmath implements three numerical inverse Laplace transform algorithms, attributed to: Talbot, Stehfest, and de Hoog, Knight and Stokes. These can be selected by using *method='talbot'*, *method='stehfest'*, *method='dehoog'*, or *method='cohen'* The functions `mpmath.invlaptalbot`, `mpmath.invlapstehfest`, and `mpmath.invlapdehoog` and `mpmath.invlapcohen` are also available as shortcuts.

All four algorithms implement a heuristic balance between the requested precision and the precision used internally for the calculations. This has been tuned for a typical exponentially decaying function and precision up to few hundred decimal digits.

The Laplace transform converts the variable time (i.e., along a line) into a parameter given by the right half of the complex p-plane. Singularities, poles, and branch cuts in the complex p-plane contain all the information regarding the time behavior of the corresponding function. Any numerical method must therefore sample p-plane "close enough" to the singularities to accurately characterize them, while not getting too close to have catastrophic cancellation, overflow, or underflow issues. Most significantly, if one or more of the singularities in the p-plane is not on the left side of the Bromwich contour, its effects will be left out of the computed solution, and the answer will be completely wrong.

5.8.2 Talbot method

`ctx.`**`invlaptalbot`**(*f*, *t*, ***kwargs*)

where `ctx` is `dec`, `mpm`, or `gmp`.

See also: Abate and Valko [1], Talbot [510].

The fixed Talbot method is high accuracy and fast, but the method can catastrophically fail for certain classes of time-domain behavior, including a Heaviside step function for positive time (e.g., $H(t-2)$), or some oscillatory behaviors. The Talbot method usually has adjustable parameters, but the "fixed" variety implemented here does not. This method deforms the Bromwich integral contour in the shape of a parabola towards $-\infty$, which leads to problems when the solution has a decaying exponential in it (e.g., a Heaviside step function is equivalent to multiplying by a decaying exponential in Laplace space).

`def calc_laplace_parameter(self,t,**kwargs)`

The "fixed" Talbot method deforms the Bromwich contour towards $-\infty$ in the shape of a parabola. Traditionally the Talbot algorithm has adjustable parameters, but the "fixed" version does not. The r parameter could be passed in as a parameter, if you want to override the default given by (Abate & Valko, 2004).

The Laplace parameter is sampled along a parabola opening along the negative imaginary axis, with the base of the parabola along the real axis at $p = \frac{r}{t_{\max}}$. As the number of terms used in the approximation (degree) grows, the abscissa required for function evaluation tend towards $-\infty$, requiring high precision to prevent overflow. If any poles, branch cuts or other singularities exist such that the deformed Bromwich contour lies to the left of the singularity, the method will fail.

Optional arguments

`calc_laplace_parameter` recognizes the following keywords

tmax
: maximum time associated with vector of times (typically just the time requested)

degree
integer order of approximation (M = number of terms)

r
abscissa for p_0 (otherwise computed using rule of thumb $2M/5$)

The working precision will be increased according to a rule of thumb. If 'degree' is not specified, the working precision and degree are chosen to hopefully achieve the dps of the calling context. If 'degree' is specified, the working precision is chosen to achieve maximum resulting precision for the specified degree.

$$p_0 = \frac{r}{t}$$

$$p_i = \frac{ir\pi}{Mt_{\max}}\left[\cot\left(\frac{i\pi}{M}\right) + j\right] \qquad 1 \le i < M$$

where $j = \sqrt{-1}$, $r = 2M/5$, and $t_{\max}$ is the maximum specified time.

`def calc_time_domain_solution(self,fp,t,manual_prec=False)`

The fixed Talbot time-domain solution is computed from the Laplace-space function evaluations using

$$f(t, M) = \frac{2}{5t}\sum_{k=0}^{M-1} \Re\left[\gamma_k \bar{f}(p_k)\right]$$

where

$$\gamma_0 = \frac{1}{2}e^r \bar{f}(p_0)$$

$$\gamma_k = e^{tp_k}\left\{1 + \frac{jk\pi}{M}\left[1 + \cot\left(\frac{k\pi}{M}\right)^2\right] - j\cot\left(\frac{k\pi}{M}\right)\right\} \qquad 1 \le k < M.$$

Again, $j = \sqrt{-1}$.

Before calling this function, call `calc_laplace_parameter` to set the parameters and compute the required coefficients.

5.8.3 Stehfest method

`ctx.invlapstehfest(`*f*, *t*, ***kwargs*`)`

where `ctx` is `dec`, `mpm`, or `gmp`.

See also: Stehfest [503], Widder [1075].

The Stehfest algorithm only uses abscissa along the real axis of the complex p-plane to estimate the time-domain function. Oscillatory time-domain functions have poles away from the real axis, so this method does not work well with oscillatory functions, especially high-frequency ones. This method also depends on summation of terms in a series that grows very large, and will have catastrophic cancellation during summation if the working precision is too low.

`def calc_laplace_parameter(self,t,**kwargs)`

The Gaver-Stehfest method is a discrete approximation of the Widder-Post inversion algorithm, rather than a direct approximation of the Bromwich contour integral.

The method abscissa along the real axis, and therefore has issues inverting oscillatory functions (which have poles in pairs away from the real axis).

The working precision will be increased according to a rule of thumb. If 'degree' is not specified, the working precision and degree are chosen to hopefully achieve the dps of the calling context. If 'degree' is specified, the working precision is chosen to achieve maximum resulting precision for the specified degree.

$$p_k = \frac{k\log 2}{t} \qquad 1 \le k \le M$$

`def calc_time_domain_solution(self,fp,t,manual_prec=False)`

Compute time-domain Stehfest algorithm solution.

$$f(t,M) = \frac{\log 2}{t} \sum_{k=1}^{M} V_k \bar{f}\left(p_k\right)$$

where

$$V_k = (-1)^{k+N/2} \sum_{i=\lfloor (k+1)/2 \rfloor}^{\min(k,N/2)} \frac{i^{\frac{N}{2}}(2i)!}{\left(\frac{N}{2}-i\right)!\, i!\, (i-1)!\, (k-i)!\, (2i-k)!}$$

As the degree increases, the abscissa (p_k) only increase linearly towards ∞, but the Stehfest coefficients (V_k) alternate in sign and increase rapidly in sign, requiring high precision to prevent overflow or loss of significance when evaluating the sum.

5.8.4 de Hoog, Knight, and Stokes method

`ctx.invlapdehoog`(f, t, ***kwargs*)

where `ctx` is `dec`, `mpm`, or `gmp`.

See also: Davies [200], [deHoog1982`.

The de Hoog, Knight, and Stokes method is essentially a Fourier-series quadrature-type approximation to the Bromwich contour integral, with non-linear series acceleration and an analytical expression for the remainder term. This method is typically the most robust and is therefore the default method. This method also involves the greatest amount of overhead, so it is typically the slowest of the three methods at high precision.

`calc_laplace_parameter(self,t,**kwargs)`

The de Hoog, Knight & Stokes algorithm is an accelerated form of the Fourier series numerical inverse Laplace transform algorithms.

$$p_k = \gamma + \frac{jk}{T} \qquad 0 \le k < 2M+1$$

where

$$\gamma = \alpha - \frac{\log \mathrm{tol}}{2T},$$

$j = \sqrt{-1}$, $T = 2t_{\max}$ is a scaled time, $\alpha = 10^{-\mathrm{dps_goal}}$ is the real part of the rightmost pole or singularity, which is chosen based on the desired accuracy (assuming the rightmost singularity is 0), and $\mathrm{tol} = 10\alpha$ is the desired tolerance, which is chosen in relation to α.`

When increasing the degree, the abscissa increase towards $j\infty$, but more slowly than the fixed Talbot algorithm. The de Hoog et al. algorithm typically does better with oscillatory functions of time, and less well-behaved functions. The method tends to be slower than the Talbot and Stehfest algorithsm, especially so at very high precision (e.g., > 500 digits precision).

`def calc_time_domain_solution(self,fp,t,manual_prec=False)` Calculate time-domain solution for de Hoog, Knight & Stokes algorithm.

The un-accelerated Fourier series approach is:

$$f(t,2M+1) = \frac{e^{\gamma t}}{T} \sum_{k=0}^{2M}{}' \Re\left[\bar{f}\left(p_k\right) e^{i\pi t/T}\right],$$

where the prime on the summation indicates the first term is halved.

This simplistic approach requires so many function evaluations that it is not practical. Non-linear acceleration is accomplished via Pade-approximation and an analytic expression for the remainder of the continued fraction. See the original paper (reference 2 below) a detailed description of the numerical approach.

5.8.5 Cohen method

`ctx.invlapcohen`(*f*, *t*, ***kwargs*)

where `ctx` is `dec`, `mpm`, or `gmp`.

See also Cohen *et al.* [182], Glasserman and Ruiz-Mata [348].

The Cohen method is a trapezoidal rule approximation to the Bromwich contour integral, with linear acceleration for alternating series. This method is as robust as the de Hoog et al method and the fastest of the four methods at high precision, and is therefore the default method.

The Cohen algorithm accelerates the convergence of the nearly alternating series resulting from the application of the trapezoidal rule to the Bromwich contour inversion integral.

$$p_k = \frac{\gamma}{2t} + \frac{\pi i k}{t} \qquad 0 \le k < M$$

where

$$\gamma = \frac{2}{3}(d + \log(10) + \log(2t)),$$

$d = \mathrm{dps_goal}$, which is chosen based on the desired accuracy using the method developed in [1] to improve numerical stability. The Cohen algorithm shows robustness similar to the de Hoog et al. algorithm, but it is faster than the fixed Talbot algorithm.

Optional arguments

degree
: integer order of the approximation (M = number of terms)

alpha
: abscissa for p_0 (controls the discretization error)

The working precision will be increased according to a rule of thumb. If 'degree' is not specified, the working precision and degree are chosen to hopefully achieve the dps of the calling context. If 'degree' is specified, the working precision is chosen to achieve maximum resulting precision for the specified degree.

Calculate time-domain solution for Cohen algorithm.

The accelerated nearly alternating series is:

$$f(t, M) = \frac{e^{\gamma/2}}{t}\left[\frac{1}{2}\Re\left(\bar{f}\left(\frac{\gamma}{2t}\right)\right) - \sum_{k=0}^{M-1}\frac{c_{M,k}}{d_M}\Re\left(\bar{f}\left(\frac{\gamma + 2(k+1)\pi i}{2t}\right)\right)\right],$$

where coefficients $\frac{c_{M,k}}{d_M}$ are described in Cohen *et al.* [182].

5.9 Boost/Odeint: Ordinary differential equations

Boost Odeint is a library for solving initial value problems (IVP) of ordinary differential equations. Mathematically, these problems are formulated as follows:

$$x'(t) = f(x,t), x(0) = x0.$$

x and f can be vectors and the solution is some function x(t) fulfilling both equations above. In the following we will refer to x'(t) also dxdt which is also our notation for the derivative in the source code.

Ordinary differential equations occur nearly everywhere in natural sciences. For example, the whole Newtonian mechanics are described by second order differential equations. Be sure, you will find them in every discipline. They also occur if partial differential equations (PDEs) are discretized. Then, a system of coupled ordinary differential occurs, sometimes also referred as lattices ODEs.

odeint provides a quite large number of different steppers such that the user is left with the question of which stepper fits his needs. Our personal recommendations are:

runge_kutta_dopri5 is maybe the best default stepper. It has step size control as well as dense-output functionality. Simple create a dense-output stepper by make_dense_output(1.0e-6 , 1.0e-5 , runge_kutta_dopri5< state_type >()).

runge_kutta4 is a good stepper for constant step sizes. It is widely used and very well known. If you need to create artificial time series this stepper should be the first choice.

'runge_kutta_fehlberg78' is similar to the 'runge_kutta4' with the advantage that it has higher precision. It can also be used with step size control.

adams_bashforth_moulton is very well suited for ODEs where the r.h.s. is expensive (in terms of computation time). It will calculate the system function only once during each step.

See also: BoostMath [5], Wikipedia [1108].

5.9.1 Runge-Kutta 4 method, constant stepper

ctxboost.**RungeKutta4Const**(*F1*, *F2*, *matInput*, *StartTime*, *EndTime*, *mathrm{d}t*)

Solves Ordinary differential equations using the Runge-Kutta 4 method with a constant stepper.

See also: Wikipedia [1110], Rump [492], Kutta [401].

In numerical analysis, the Runge-Kutta methods are an important family of implicit and explicit iterative methods, which are used in temporal discretization for the approximation of solutions of ordinary differential equations. These techniques were developed around 1900 by the German mathematicians C. Runge and M. W. Kutta.

See the article on numerical methods for ordinary differential equations for more background and other methods. See also List of Runge-Kutta methods.

One member of the family of Runge-Kutta methods is often referred to as "RK4", "classical Runge-Kutta method" or simply as "the Runge-Kutta method".

Let an initial value problem be specified as follows.

Here, y is an unknown function (scalar or vector) of time t which we would like to approximate; we are told that , the rate at which y changes, is a function of t and of y itself. At the initial time the corresponding y-value is . The function f and the data , are given.

Example:

```
Public Sub matLorenz(x As dbl_mat_t, dxdt As dbl_mat_t)
    Dim sigma, R, b As Double
    sigma = 10: R = 28: b = 8 / 3
    dxdt(0) = sigma * ( x(1) - x(0) )
    dxdt(1) = R * x(0) - x(1) - x(0) * x(2)
    dxdt(2) = -b * x(2) + x(0) * x(1)
End Sub

Sub DemoLorenzOdeintLocal()
    Console.WriteLine( "DemoLorenzOdeintLocal(matX, StartTime, EndTime, \mathrm{d}t)")
    Dim matX3 As New dbl_mat_t()
    matX3.resize(3,1)
    matX3(0) = 10.0
    matX3(1) = 10.0
    matX3(2) = 10.0
    Dim StartTime = 0.0
    Dim EndTime = 10.0
    Dim \mathrm{d}t = 0.1
    matX3.print("matX at StartTime", 15)
    Dim ODE As New Odeint(AddressOf matLorenz, matX3, StartTime, EndTime, \mathrm{d}t)
    ODE.Integrate()
    matX3.print("matX at EndTime", 15)
End Sub
```

This produces the following output:

```
DemoLorenzOdeintLocal(matX, StartTime, EndTime, \mathrm{d}t)
matX at StartTime
10,
10,
10,

matX at EndTime
-2.43203453419697,
0.560815431795122,
25.4697563106702,
```

5.9.2 Cash-Karp method, constant stepper

ctxboost.**CashKarpConst**(*F1*, *F2*, *matInput*, *StartTime*, *EndTime*, \mathrm{d}t)

Solves Ordinary differential equations using the Cash-Karp method, using a constant stepper

See also: Wikipedia [1099], Cash and Karp [174].

In numerical analysis, the Cash-Karp method is a method for solving ordinary differential equations (ODEs). It was proposed by Professor Jeff R. Cash [1] from Imperial College London and Alan H. Karp from IBM Scientific Center. The method is a member of the Runge-Kutta family of ODE solvers. More specifically, it uses six function evaluations to calculate fourth- and fifth-order accurate solutions. The difference between these solutions is then taken to be the error of the (fourth order) solution. This error estimate is very convenient for adaptive stepsize integration algorithms. Other similar integration methods are Fehlberg (RKF) and Dormand-Prince (RKDP).

5.9.3 Dormand-Prince 5 method, constant stepper

ctxboost.**DormandPrince5Const**(*F1*, *F2*, *matInput*, *StartTime*, *EndTime*, \mathrm{d}t, *epsabs*, *epsrel*)

Solves Ordinary differential equations using the Dormand-Prince method, using a constant stepper

See also: Wikipedia [1101], Dormand and Prince [285].

In numerical analysis, the Dormand-Prince method, or DOPRI method, is an explicit method for solving ordinary differential equations citep{Dormand1980}. The method is a member of the Runge-Kutta family of ODE solvers. More specifically, it uses six function evaluations to calculate fourth- and fifth-order accurate solutions. The difference between these solutions is then taken to be the error of the (fourth-order) solution. This error estimate is very convenient for adaptive stepsize integration algorithms. Other similar integration methods are Fehlberg (RKF) and Cash-Karp (RKCK).

The Dormand-Prince method has seven stages, but it uses only six function evaluations per step because it has the FSAL (First Same As Last) property: the last stage is evaluated at the same point as the first stage of the next step. Dormand and Prince choose the coefficients of their method to minimize the error of the fifth-order solution. This is the main difference with the Fehlberg method, which was constructed so that the fourth-order solution has a small error. For this reason, the Dormand-Prince method is more suitable when the higher-order solution is used to continue the integration, a practice known as local extrapolation (Shampine 1986; Hairer, Nørsett & Wanner 2008, pp. 178-179).

5.9.4 Fehlberg 78 method, constant stepper

ctxboost.**Fehlberg78Const**(*F1*, *F2*, *matInput*, *StartTime*, *EndTime*, *mathrm{d}t*, *epsabs*, *epsrel*)

Solves Ordinary differential equations using the Fehlberg 78 method, using a constant stepper

See also: Wikipedia [1111], Fehlberg [297].

In mathematics, the Runge-Kutta-Fehlberg method (or Fehlberg method) is an algorithm in numerical analysis for the numerical solution of ordinary differential equations. It was developed by the German mathematician Erwin Fehlberg and is based on the large class of Runge-Kutta methods.

The novelty of Fehlberg's method is that it is an embedded method from the Runge-Kutta family, meaning that identical function evaluations are used in conjunction with each other to create methods of varying order and similar error constants. The method presented in Fehlberg's 1969 paper has been dubbed the RKF45 method, and is a method of order O(h4) with an error estimator of order O(h5).[1] By performing one extra calculation, the error in the solution can be estimated and controlled by using the higher-order embedded method that allows for an adaptive stepsize to be determined automatically.

5.9.5 Adams-Bashforth-Moulton, constant stepper

ctxboost.**AdamsBashforthMoultonConst**(*F1*, *F2*, *matInput*, *StartTime*, *EndTime*, \mathrm{d}t, *epsabs*, *epsrel*)

Solves Ordinary differential equations using the Adams-Bashforth-Moulton method, using a constant stepper

See also: Wikipedia [1102].

The methods of Euler, Heun, Taylor and Runge-Kutta are called single-step methods because they use only the information from one previous point to compute the successive point, that is, only the initial point is used to compute and in general is needed to compute . After several points have been found it is feasible to use several prior points in the calculation. The Adams-Bashforth-Moulton method uses in the calculation of . This method is not self-starting; four initial points , , , and must be given in advance in order to generate the points .

A desirable feature of a multistep method is that the local truncation error (L. T. E.) can be determined and a correction term can be included, which improves the accuracy of the answer at each step. Also, it is possible to determine if the step size is small enough to obtain an accurate value for , yet large enough so that unnecessary and time-consuming calculations are eliminated. If the code for the subroutine is fine-tuned, then the combination of a predictor and corrector requires only two function evaluations of f(t,y) per step.

5.9.6 Cash-Karp method, adaptive stepper

ctxboost.**CashKarpAdaptive**(*F1*, *F2*, *matInput*, *StartTime*, *EndTime*, \mathrm{d}t, *epsabs*, *epsrel*)

Solves Ordinary differential equations using the Cash-Karp method method with an adaptive stepper.

See also: Wikipedia [1099], Cash and Karp [174].

In numerical analysis, the Cash-Karp method is a method for solving ordinary differential equations (ODEs). It was proposed by Professor Jeff R. Cash [1] from Imperial College London and Alan H. Karp from IBM Scientific Center. The method is a member of the Runge-Kutta family of ODE solvers. More specifically, it uses six function evaluations to calculate fourth- and fifth-order accurate solutions. The difference between these solutions is then taken to be the error of the (fourth order) solution. This error estimate is very convenient for adaptive stepsize integration algorithms. Other similar integration methods are Fehlberg (RKF) and Dormand-Prince (RKDP).

5.9.7 Dormand-Prince 5 method, adaptive stepper

ctxboost.**DormandPrince5Adaptive**(*F1*, *F2*, *matInput*, *StartTime*, *EndTime*, \mathrm{d}t, *epsabs*, *epsrel*)

Solves Ordinary differential equations using the Dormand-Prince 5 method with an adaptive stepper.

See also: Wikipedia [1101], Dormand and Prince [285].

In numerical analysis, the Dormand-Prince method, or DOPRI method, is an explicit method for solving ordinary differential equations citep{Dormand1980}. The method is a member of the Runge-Kutta family of ODE solvers. More specifically, it uses six function evaluations to calculate fourth- and fifth-order accurate solutions. The difference between these solutions is then taken to be the error of the (fourth-order) solution. This error estimate is very convenient for adaptive stepsize integration algorithms. Other similar integration methods are Fehlberg (RKF) and Cash-Karp (RKCK).

The Dormand-Prince method has seven stages, but it uses only six function evaluations per step because it has the FSAL (First Same As Last) property: the last stage is evaluated at the same point as the first stage of the next step. Dormand and Prince choose the coefficients of their method to minimize the error of the fifth-order solution. This is the main difference with the Fehlberg method, which was constructed so that the fourth-order solution has a small error. For this reason, the Dormand-Prince method is more suitable when the higher-order solution is used to continue the integration, a practice known as local extrapolation (Shampine 1986; Hairer, Nørsett & Wanner 2008, pp. 178-179).

5.9.8 Fehlberg 78 method, adaptive stepper

ctxboost.**Fehlberg78Adaptive**(*F1*, *F2*, *matInput*, *StartTime*, *EndTime*, *mathrm{d}t*, *epsabs*, *epsrel*)

Solves Ordinary differential equations using the Fehlberg 78 method with an adaptive stepper.

See also: Wikipedia [1111], Fehlberg [297].

In mathematics, the Runge-Kutta-Fehlberg method (or Fehlberg method) is an algorithm in numerical analysis for the numerical solution of ordinary differential equations. It was developed by the German mathematician Erwin Fehlberg and is based on the large class of Runge-Kutta methods.

The novelty of Fehlberg's method is that it is an embedded method from the Runge-Kutta family, meaning that identical function evaluations are used in conjunction with each other to create methods of varying order and similar error constants. The method presented in Fehlberg's 1969 paper has been dubbed the RKF45 method, and is a method of order O(h4) with an error estimator of order O(h5).[1] By performing one extra calculation, the error in the solution can be estimated and controlled by using the higher-order embedded method that allows for an adaptive stepsize to be determined automatically.

5.9.9 Bulirsch-Stoer method, adaptive stepper

ctxboost.**BulirschStoerAdaptive**(*F1*, *F2*, *matInput*, *StartTime*, *EndTime*, *mathrm{d}t*, *epsabs*, *epsrel*)

Solves Ordinary differential equations using the Bulirsch-Stoer method, with an adaptive stepper

See also: Wikipedia [1098], Hairer *et al.* [360].

In numerical analysis, the Bulirsch-Stoer algorithm is a method for the numerical solution of ordinary differential equations which combines three powerful ideas: Richardson extrapolation, the use of rational function extrapolation in Richardson-type applications, and the modified midpoint method, to obtain numerical solutions to ordinary differential equations (ODEs) with high accuracy and comparatively little computational effort. It is named after Roland Bulirsch and Josef Stoer. It is sometimes called the Gragg-Bulirsch-Stoer (GBS) algorithm because of the importance of a result about the error function of the modified midpoint method, due to William B. Gragg.

5.9.10 Dormand-Prince 5 method, dense output stepper

ctxboost.**DormandPrince5DenseOutput**(*F1*, *F2*, *matInput*, *StartTime*, *EndTime*, *mathrm{d}t*, *epsabs*, *epsrel*)

Solves Ordinary differential equations using the Dormand-Prince 5 method, with a dense output stepper.

See also: Wikipedia [1101], Dormand and Prince [285].

In numerical analysis, the Dormand-Prince method, or DOPRI method, is an explicit method for solving ordinary differential equations citep{Dormand1980}. The method is a member of the Runge-Kutta family of ODE solvers. More specifically, it uses six function evaluations to calculate fourth- and fifth-order accurate solutions. The difference between these solutions is then taken to be the error of the (fourth-order) solution. This error estimate is very convenient for adaptive stepsize integration algorithms. Other similar integration methods are Fehlberg (RKF) and Cash-Karp (RKCK).

The Dormand-Prince method has seven stages, but it uses only six function evaluations per step because it has the FSAL (First Same As Last) property: the last stage is evaluated at the same point as the first stage of the next step. Dormand and Prince choose the coefficients of their method to minimize the error of the fifth-order solution. This is the main difference with the Fehlberg method, which was constructed so that the fourth-order solution has a small error. For this reason, the Dormand-Prince method is more suitable when the higher-order solution is used to continue the integration, a practice known as local extrapolation (Shampine 1986; Hairer, Nørsett & Wanner 2008, pp. 178-179).

5.9.11 Bulirsch-Stoer method, dense output stepper

ctxboost.**BulirschStoerDenseOutput**(*F1*, *F2*, *matInput*, *StartTime*, *EndTime*, *mathrm{d}t*, *epsabs*, *epsrel*)

Solves Ordinary differential equations using the Bulirsch-Stoer method, with a dense output stepper.

See also: Wikipedia [1098], Hairer *et al.* [360].

In numerical analysis, the Bulirsch-Stoer algorithm is a method for the numerical solution of ordinary differential equations which combines three powerful ideas: Richardson extrapolation, the use of rational function extrapolation in Richardson-type applications, and the modified midpoint method, to obtain numerical solutions to ordinary differential equations (ODEs) with high accuracy and comparatively little computational effort. It is named after Roland Bulirsch and Josef Stoer. It is sometimes called the Gragg-Bulirsch-Stoer (GBS) algorithm because of the importance of a result about the error function of the modified midpoint method, due to William B. Gragg.

5.10 Mpmath: Numerical differentiation

5.10.1 First derivative, using the complex-step derivative approximation

`ctx.deriv1_c`(*f*, *x0*, *solver='secant'*, *tol=None*, *verbose=False*, *verify=True*, ***kwargs*)

where `ctx` is `dec`, `mpm`, or `gmp`.

See also: https://nhigham.com/2020/10/06/what-is-the-complex-step-approximation/

See Lai and Crassidis

The complex-step derivative approximation can be derived by approximating a nonlinear function with a complex variable using a Taylor's series expansion:

$$f(x+ih) = f(x) + ihf'(x) - \frac{h^2}{2!}f''(x) - i\frac{h^3}{3!}f^{(3)}(x) + \frac{h^4}{4!}f^{(4)}(x) + \cdots$$

Taking only the imaginary parts of both sides, dividing by h and rearranging gives

$$f'(x) = \frac{\Im\left(f(x+ih)\right)}{h} + O(h^2)$$

Terms with order h^2 or higher can be ignored since the interval h can be chosen up to machine precision. Thus, to within first order the complex-step derivative approximation is given by

$$f'(x) = \frac{\Im\left(f(x+ih)\right)}{h}, E_{\text{trunc}}(h) = \frac{h^2}{6}f^{(3)}(x)$$

where $E_{\text{trunc}}(h)$ denotes the truncation error. Note that this solution is not a function of differences, which ultimately provides better roundoff characteristics than a standard finite difference.

5.10.2 Second derivative, using the complex-step derivative approximation

`ctx.deriv2_c`(*f*, *x0*, *solver='secant'*, *tol=None*, *verbose=False*, *verify=True*, ***kwargs*)

where `ctx` is `dec`, `mpm`, or `gmp`.

See also: https://nhigham.com/2020/10/06/what-is-the-complex-step-approximation/

See Lai and Crassidis

5.10.3 Gradient, using the complex-step derivative approximation

`ctx.gradient_c`(*f*, *x0*, *solver='secant'*, *tol=None*, *verbose=False*, *verify=True*, ***kwargs*)

where `ctx` is `dec`, `mpm`, or `gmp`.

See also: https://nhigham.com/2020/10/06/what-is-the-complex-step-approximation/

The gradient of a vector function is a simple extension of the scalar case.

5.10.4 Jacobi matrix, using the complex-step derivative approximation

`ctx.jacobi_c`(*f*, *x0*, *solver='secant'*, *tol=None*, *verbose=False*, *verify=True*, ***kwargs*)

where `ctx` is `dec`, `mpm`, or `gmp`.

See also: https://nhigham.com/2020/10/06/what-is-the-complex-step-approximation/

The Jacobian of a vector function is a simple extension of the scalar case. This Jacobian is defined by

$$F_x = \begin{pmatrix} \frac{\partial f_1(\boldsymbol{x})}{\partial x_1} & \frac{\partial f_1(\boldsymbol{x})}{\partial x_2} & \cdots & \frac{\partial f_1(\boldsymbol{x})}{\partial x_p} & \cdots & \frac{\partial f_1(\boldsymbol{x})}{\partial x_n} \\ \frac{\partial f_2(\boldsymbol{x})}{\partial x_1} & \frac{\partial f_2(\boldsymbol{x})}{\partial x_2} & \cdots & \frac{\partial f_2(\boldsymbol{x})}{\partial x_p} & \cdots & \frac{\partial f_2(\boldsymbol{x})}{\partial x_n} \\ \vdots & \vdots & \vdots & \vdots & \vdots & \vdots \\ \frac{\partial f_q(\boldsymbol{x})}{\partial x_1} & \frac{\partial f_q(\boldsymbol{x})}{\partial x_2} & \cdots & \frac{\partial f_q(\boldsymbol{x})}{\partial x_p} & \cdots & \frac{\partial f_q(\boldsymbol{x})}{\partial x_n} \\ \vdots & \vdots & \vdots & \vdots & \vdots & \vdots \\ \frac{\partial f_m(\boldsymbol{x})}{\partial x_1} & \frac{\partial f_m(\boldsymbol{x})}{\partial x_2} & \cdots & \frac{\partial f_m(\boldsymbol{x})}{\partial x_p} & \cdots & \frac{\partial f_m(\boldsymbol{x})}{\partial x_n} \end{pmatrix}$$

The complex-step approximation of the Jacobian is defined by

$$F_x = \frac{1}{h}\Im \begin{pmatrix} f_1(\boldsymbol{x}+ih\boldsymbol{e}_1) & f_1(\boldsymbol{x}+ih\boldsymbol{e}_2) & \cdots & f_1(\boldsymbol{x}+ih\boldsymbol{e}_q) & \cdots & f_1(\boldsymbol{x}+ih\boldsymbol{e}_n) \\ f_2(\boldsymbol{x}+ih\boldsymbol{e}_1) & f_2(\boldsymbol{x}+ih\boldsymbol{e}_2) & \cdots & f_2(\boldsymbol{x}+ih\boldsymbol{e}_q) & \cdots & f_2(\boldsymbol{x}+ih\boldsymbol{e}_n) \\ \vdots & \vdots & \vdots & \vdots & \vdots & \vdots \\ f_q(\boldsymbol{x}+ih\boldsymbol{e}_1) & f_q(\boldsymbol{x}+ih\boldsymbol{e}_2) & \cdots & f_q(\boldsymbol{x}+ih\boldsymbol{e}_q) & \cdots & f_q(\boldsymbol{x}+ih\boldsymbol{e}_n) \\ \vdots & \vdots & \vdots & \vdots & \vdots & \vdots \\ f_m(\boldsymbol{x}+ih\boldsymbol{e}_1) & f_m(\boldsymbol{x}+ih\boldsymbol{e}_2) & \cdots & f_m(\boldsymbol{x}+ih\boldsymbol{e}_q) & \cdots & f_m(\boldsymbol{x}+ih\boldsymbol{e}_n) \end{pmatrix}$$

where $\boldsymbol{e}_p$ is the p^{th} column of an n^{th}-order identity matrix and f_q is the q^{th} equation of $\boldsymbol{f}(\boldsymbol{x})$.

!!! CHECK CODE IN MPMATH !!!

5.10.5 Nth numerical (partial) derivative, using finite differences or numerical quadrature

`ctx.diff`(*f*, *x*, *n=1*, ***options*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Numerically computes the derivative of f, $f'(x)$, or generally for an integer $n \geq 0$, the n-th derivative $f^{(n)}(x)$. A few basic examples are:

```
>>> from xlcalcnet import *
>>> mp.dps = 15; mp.pretty = True
>>> diff(lambda x: x**2 + x, 1.0)
3.0
>>> diff(lambda x: x**2 + x, 1.0, 2)
2.0
>>> diff(lambda x: x**2 + x, 1.0, 3)
0.0
>>> nprint([diff(exp, 3, n) for n in range(5)])   # exp'(x) = exp(x)
[20.0855, 20.0855, 20.0855, 20.0855, 20.0855]
```

Even more generally, given a tuple of arguments $(x_1, \ldots, x_k)$ and order $(n_1, \ldots, n_k)$, the partial derivative $f^{(n_1,\ldots,n_k)}(x_1, \ldots, x_k)$ is evaluated. For example:

```
>>> diff(lambda x,y: 3*x*y + 2*y - x, (0.25, 0.5), (0,1))
2.75
>>> diff(lambda x,y: 3*x*y + 2*y - x, (0.25, 0.5), (1,1))
3.0
```

Options

The following optional keyword arguments are recognized:

`method`
Supported methods are `'step'` or `'quad'`: derivatives may be computed using either a finite difference with a small step size h (default), or numerical quadrature.

direction
Direction of finite difference: can be -1 for a left difference, 0 for a central difference (default), or +1 for a right difference; more generally can be any complex number.

addprec
Extra precision for h used to account for the function's sensitivity to perturbations (default = 10).

relative
Choose h relative to the magnitude of x, rather than an absolute value; useful for large or tiny x (default = False).

h
As an alternative to `addprec` and `relative`, manually select the step size h.

singular
If True, evaluation exactly at the point x is avoided; this is useful for differentiating functions with removable singularities. Default = False.

radius
Radius of integration contour (with `method = 'quad'`). Default = 0.25. A larger radius typically is faster and more accurate, but it must be chosen so that f has no singularities within the radius from the evaluation point.

A finite difference requires $n+1$ function evaluations and must be performed at $(n+1)$ times the target precision. Accordingly, f must support fast evaluation at high precision.

With integration, a larger number of function evaluations is required, but not much extra precision is required. For high order derivatives, this method may thus be faster if f is very expensive to evaluate at high precision.

Further examples

The direction option is useful for computing left- or right-sided derivatives of nonsmooth functions:

```
>>> diff(abs, 0, direction=0)
0.0
>>> diff(abs, 0, direction=1)
1.0
>>> diff(abs, 0, direction=-1)
-1.0
```

More generally, if the direction is nonzero, a right difference is computed where the step size is multiplied by sign(direction). For example, with direction=+j, the derivative from the positive imaginary direction will be computed:

```
>>> diff(abs, 0, direction=j)
(0.0 - 1.0j)
```

With integration, the result may have a small imaginary part even even if the result is purely real:

```
>>> diff(sqrt, 1, method='quad')
(0.5 - 4.59...e-26j)
>>> chop(_)
0.5
```

Adding precision to obtain an accurate value:

```
>>> diff(cos, 1e-30)
0.0
>>> diff(cos, 1e-30, h=0.0001)
-9.99999998328279e-31
>>> diff(cos, 1e-30, addprec=100)
-1.0e-30
```

5.10.6 Function object which evaluates the nth derivative of a given function

`ctx.diffun`(*f*, *n=1*, ***options*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Given a function f, returns a function $g(x)$ that evaluates the nth derivative $f^{(n)}(x)$:

```
>>> from xlcalcnet import *
>>> mp.dps = 15; mp.pretty = True
>>> cos2 = diffun(sin)
>>> sin2 = diffun(sin, 4)
>>> cos(1.3), cos2(1.3)
(0.267498828624587, 0.267498828624587)
>>> sin(1.3), sin2(1.3)
(0.963558185417193, 0.963558185417193)
```

The function f must support arbitrary precision evaluation. See `diff()` for additional details and supported keyword options.

5.10.7 Forward difference, based on a given sequence

`ctx.difference`(*s*, *n*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Given a sequence (s_k) containing at least $n+1$ items, returns the n-th forward difference,

$$\Delta^n = \sum_{k=0}^{\infty} (-1)^{k+n} \binom{n}{k} s_k.$$

EXAMPLE !!!!!

5.10.8 Generating a sequence of derivatives

`ctx.diffs`(*f*, *x*, *n=None*, ***options*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Returns a generator that yields the sequence of derivatives

$$f(x), f'(x), f''(x), \ldots, f^{(k)}(x), \ldots$$

With `method='step'`, `diffs()` uses only $O(k)$ function evaluations to generate the first k derivatives, rather than the roughly $O(k^2)$ evaluations required if one calls `diff()` k separate times.

With $n < \infty$, the generator stops as soon as the n-th derivative has been generated. If the exact number of needed derivatives is known in advance, this is further slightly more efficient.

Options are the same as for `diff()`.

Examples

```
>>> from xlcalcnet import *
>>> mp.dps = 15
>>> nprint(list(diffs(cos, 1, 5)))
[0.540302, -0.841471, -0.540302, 0.841471, 0.540302, -0.841471]
>>> for i, d in zip(range(6), diffs(cos, 1)):
...     print("%s %s" % (i, d))
...
0 0.54030230586814
1 -0.841470984807897
```

(continues on next page)

(continued from previous page)

```
2 -0.54030230586814
3 0.841470984807897
4 0.54030230586814
5 -0.841470984807897
```

5.10.9 Composition of derivatives

`ctx.diffs_prod`(*factors*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Given a list of N iterables or generators yielding $f_k(x), f_k'(x), f_k''(x), \ldots$ for $k = 1, \ldots, N$, generate $g(x), g'(x), g''(x), \ldots$ where $g(x) = f_1(x) f_2(x) \cdots f_N(x)$.

At high precision and for large orders, this is typically more efficient than numerical differentiation if the derivatives of each $f_k(x)$ admit direct computation.

Note: This function does not increase the working precision internally, so guard digits may have to be added externally for full accuracy.

Examples

```
>>> from xlcalcnet import *
>>> mp.dps = 15; mp.pretty = True
>>> f = lambda x: exp(x)*cos(x)*sin(x)
>>> u = diffs(f, 1)
>>> v = mp.diffs_prod([diffs(exp,1), diffs(cos,1), diffs(sin,1)])
>>> next(u); next(v)
1.23586333600241
1.23586333600241
>>> next(u); next(v)
0.104658952245596
0.104658952245596
>>> next(u); next(v)
-5.96999877552086
-5.96999877552086
>>> next(u); next(v)
-12.4632923122697
-12.4632923122697
```

5.10.10 Composition of exponential of derivatives

`ctx.diffs_exp`(*fdiffs*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Given an iterable or generator yielding $f(x), f'(x), f''(x), \ldots$ generate $g(x), g'(x), g''(x), \ldots$ where $g(x) = \exp(f(x))$.

At high precision and for large orders, this is typically more efficient than numerical differentiation if the derivatives of $f(x)$ admit direct computation.

Note: This function does not increase the working precision internally, so guard digits may have to be added externally for full accuracy.

Examples

The derivatives of the gamma function can be computed using logarithmic differentiation:

```
.. code-block:: pycon
```

```
>>> from xlcalcnet import *
>>> mp.dps = 15; mp.pretty = True
>>>
>>> def diffs_loggamma(x):
...     yield loggamma(x)
...     i = 0
...     while 1:
...         yield psi(i,x)
...         i += 1
...
>>> u = diffs_exp(diffs_loggamma(3))
>>> v = diffs(gamma, 3)
>>> next(u); next(v)
2.0
2.0
>>> next(u); next(v)
1.84556867019693
1.84556867019693
>>> next(u); next(v)
2.49292999190269
2.49292999190269
>>> next(u); next(v)
3.44996501352367
3.44996501352367
```

5.10.11 Fractional derivatives / differintegration

`ctx.differint`(*f*, *x*, *n=1*, *x0=0*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Calculates the Riemann-Liouville differintegral, or fractional derivative, defined by

$$ {}_{x_0}\mathbb{D}_x^n f(x) = \frac{1}{\Gamma(m-n)} \frac{\mathrm{d}^m}{\mathrm{d}x^m} \int_{x_0}^{x} (x-t)^{m-n-1} f(t) \mathrm{d}t $$

where f is a given (presumably well-behaved) function, x is the evaluation point, n is the order, and x_0 is the reference point of integration (m is an arbitrary parameter selected automatically).

With $n = 1$, this is just the standard derivative $f'(x)$; with $n = 2$, the second derivative $f''(x)$, etc. With $n = -1$, it gives $\int_{x_0}^{x} f(t)\mathrm{d}t$, with $n = -2$ it gives $\int_{x_0}^{x} \left(\int_{x_0}^{t} f(u) du \right) \mathrm{d}t$, etc.

As n is permitted to be any number, this operator generalizes iterated differentiation and iterated integration to a single operator with a continuous order parameter.

Examples

There is an exact formula for the fractional derivative of a monomial x^p, which may be used as a reference. For example, the following gives a half-derivative (order 0.5):

```
>>> from xlcalcnet import *
>>> mp.dps = 15; mp.pretty = True
>>> x = mpf(3); p = 2; n = 0.5
>>> differint(lambda t: t**p, x, n)
7.81764019044672
>>> gamma(p+1)/gamma(p-n+1) * x**(p-n)
7.81764019044672
```

Another useful test function is the exponential function, whose integration / differentiation formula easy generalizes to arbitrary order. Here we first compute a third derivative, and then a triply nested integral. (The reference point x_0 is set to $-\infty$ to avoid nonzero endpoint terms.):

```
>>> differint(lambda x: exp(pi*x), -1.5, 3)
0.278538406900792
>>> exp(pi*-1.5) * pi**3
0.278538406900792
>>> differint(lambda x: exp(pi*x), 3.5, -3, -inf)
1922.50563031149
>>> exp(pi*3.5) / pi**3
1922.50563031149
```

However, for noninteger n, the differentiation formula for the exponential function must be modified to give the same result as the Riemann-Liouville differintegral:

```
>>> x = mpf(3.5)
>>> c = pi
>>> n = 1+2*j
>>> differint(lambda x: exp(c*x), x, n)
(-123295.005390743 + 140955.117867654j)
>>> x**(-n) * exp(c)**x * (x*c)**n * gammainc(-n, 0, x*c) / gamma(-n)
(-123295.005390743 + 140955.117867654j)
```

5.10.12 Taylor series

`ctx.`**`taylor`**(*f*, *x*, *n*, ***options*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Produces a degree-n Taylor polynomial around the point x of the given function f. The coefficients are returned as a list.

```
>>> from xlcalcnet import *
>>> mp.dps = 15; mp.pretty = True
>>> nprint(chop(taylor(sin, 0, 5)))
[0.0, 1.0, 0.0, -0.166667, 0.0, 0.00833333]
```

The coefficients are computed using high-order numerical differentiation. The function must be possible to evaluate to arbitrary precision. See `diff()` for additional details and supported keyword options.

Note that to evaluate the Taylor polynomial as an approximation of f, e.g. with `polyval()`, the coefficients must be reversed, and the point of the Taylor expansion must be subtracted from the argument:

```
>>> p = taylor(exp, 2.0, 10)
>>> polyval(p[::-1], 2.5 - 2.0)
12.1824939606092
>>> exp(2.5)
12.1824939607035
```

5.10.13 Solving an ODE using high-order Taylor series

`ctx.`**`odefun`**(*F*, *x0*, *y0*, *tol=None*, *degree=None*, *method='taylor'*, *verbose=False*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Returns a function $y(x) = [y_0(x), y_1(x), \ldots, y_n(x)]$ that is a numerical solution of the $n+1$-dimensional first-order ordinary differential equation (ODE) system

$$
\begin{aligned}
y_0'(x) &= F_0(x, [y_0(x), y_1(x), \ldots, y_n(x)]) \\
y_1'(x) &= F_1(x, [y_0(x), y_1(x), \ldots, y_n(x)]) \\
&\vdots \\
y_n'(x) &= F_n(x, [y_0(x), y_1(x), \ldots, y_n(x)])
\end{aligned}
$$

The derivatives are specified by the vector-valued function *F* that evaluates $[y_0', \ldots, y_n'] = F(x, [y_0, \ldots, y_n])$. The initial point x_0 is specified by the scalar argument *x0*, and the initial value $y(x_0) = [y_0(x_0), \ldots, y_n(x_0)]$ is specified by the vector argument *y0*.

For convenience, if the system is one-dimensional, you may optionally provide just a scalar value for *y0*. In this case, *F* should accept a scalar *y* argument and return a scalar. The solution function *y* will return scalar values instead of length-1 vectors.

Evaluation of the solution function $y(x)$ is permitted for any $x \geq x_0$.

A high-order ODE can be solved by transforming it into first-order vector form. This transformation is described in standard texts on ODEs. Examples will also be given below.

Options, speed and accuracy

By default, `odefun()` uses a high-order Taylor series method. For reasonably well-behaved problems, the solution will be fully accurate to within the working precision. Note that *F* must be possible to evaluate to very high precision for the generation of Taylor series to work.

To get a faster but less accurate solution, you can set a large value for *tol* (which defaults roughly to *eps*). If you just want to plot the solution or perform a basic simulation, *tol = 0.01* is likely sufficient.

The *degree* argument controls the degree of the solver (with *method='taylor'*, this is the degree of the Taylor series expansion). A higher degree means that a longer step can be taken before a new local solution must be generated from *F*, meaning that fewer steps are required to get from x_0 to a given x_1. On the other hand, a higher degree also means that each local solution becomes more expensive (i.e., more evaluations of *F* are required per step, and at higher precision).

The optimal setting therefore involves a tradeoff. Generally, decreasing the *degree* for Taylor series is likely to give faster solution at low precision, while increasing is likely to be better at higher precision.

The function object returned by `odefun()` caches the solutions at all step points and uses polynomial interpolation between step points. Therefore, once $y(x_1)$ has been evaluated for some x_1, $y(x)$ can be evaluated very quickly for any $x_0 \leq x \leq x_1$. and continuing the evaluation up to $x_2 > x_1$ is also fast.

Examples of first-order ODEs

We will solve the standard test problem $y'(x) = y(x), y(0) = 1$ which has explicit solution $y(x) = \exp(x)$:

```
>>> from xlcalcnet import *
>>> mp.dps = 15; mp.pretty = True
>>> f = odefun(lambda x, y: y, 0, 1)
>>> for x in [0, 1, 2.5]:
...     print((f(x), exp(x)))
...
(1.0, 1.0)
(2.71828182845905, 2.71828182845905)
(12.1824939607035, 12.1824939607035)
```

The solution with high precision:

```
>>> mp.dps = 50
>>> f = odefun(lambda x, y: y, 0, 1)
>>> f(1)
2.7182818284590452353602874713526624977572470937
>>> exp(1)
2.7182818284590452353602874713526624977572470937
```

Using the more general vectorized form, the test problem can be input as (note that *f* returns a 1-element vector):

```
>>> mp.dps = 15
>>> f = odefun(lambda x, y: [y[0]], 0, [1])
>>> f(1)
[2.71828182845905]
```

`odefun()` can solve nonlinear ODEs, which are generally impossible (and at best difficult) to solve analytically. As an example of a nonlinear ODE, we will solve $y'(x) = x\sin(y(x))$ for $y(0) = \pi/2$. An exact solution happens to be known for this problem, and is given by $y(x) = 2\tan^{-1}\left(\exp\left(x^2/2\right)\right)$:

```
>>> f = odefun(lambda x, y: x*sin(y), 0, pi/2)
>>> for x in [2, 5, 10]:
...     print((f(x), 2*atan(exp(mpf(x)**2/2))))
...
(2.87255666284091, 2.87255666284091)
(3.14158520028345, 3.14158520028345)
(3.14159265358979, 3.14159265358979)
```

If F is independent of y, an ODE can be solved using direct integration. We can therefore obtain a reference solution with `quad()`:

```
>>> f = lambda x: (1+x**2)/(1+x**3)
>>> g = odefun(lambda x, y: f(x), pi, 0)
>>> g(2*pi)
0.72128263801696
>>> quad(f, [pi, 2*pi])
0.72128263801696
```

Examples of second-order ODEs

We will solve the harmonic oscillator equation $y''(x)+y(x) = 0$. To do this, we introduce the helper functions $y_0 = y, y_1 = y_0'$ whereby the original equation can be written as $y_1' + y_0' = 0$. Put together, we get the first-order, two-dimensional vector ODE

$$\begin{cases} y_0' = y_1 \\ y_1' = -y_0 \end{cases}$$

To get a well-defined IVP, we need two initial values. With $y(0) = y_0(0) = 1$ and $-y'(0) = y_1(0) = 0$, the problem will of course be solved by $y(x) = y_0(x) = \cos(x)$ and $-y'(x) = y_1(x) = \sin(x)$. We check this:

```
>>> f = odefun(lambda x, y: [-y[1], y[0]], 0, [1, 0])
>>> for x in [0, 1, 2.5, 10]:
...     nprint(f(x), 15)
...     nprint([cos(x), sin(x)], 15)
...     print("---")
...
[1.0, 0.0]
[1.0, 0.0]
---
[0.54030230586814, 0.841470984807897]
[0.54030230586814, 0.841470984807897]
---
[-0.801143615546934, 0.598472144103957]
[-0.801143615546934, 0.598472144103957]
---
[-0.839071529076452, -0.54402111088937]
[-0.839071529076452, -0.54402111088937]
---
```

Note that we get both the sine and the cosine solutions simultaneously.

5.11 Mpmath: Asymptotic expansions

5.11.1 Edgeworth expansion: general approximation of the pdf, cdf and sf

`ctx.edgeworth`(*x*, *cumulants*)

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Calculates the Edgeworth expansion approximations of the pdf, cdf and sf by using the cumulants of the distribution.

See also Wikipedia [1085], Blinnikov and Moessner [32], Wikipedia [1079], Wikipedia [1301].

Using the first 4 cumulants, we have

$$\Pr\left[\frac{u-\mu}{\sigma} \le x\right] = \Phi(x) + \phi(x)\left[\frac{\gamma_1}{6}(1-x^2) + \frac{\gamma_2}{24}(3x-x^3) + \frac{\gamma_1^2}{72}(15x-10x^3+x^5)\right] + O(N^{-3/2})$$

Withers and Nadarajah [1449] and Withers and Nadarajah [1450] have shown that the Edgeworth expansion can also be expressed in terms of standardized cumulants $\alpha_r = \kappa_r/\kappa_2^{r/2}$ (with $\alpha_1 = \alpha_2 = 0$), partial exponential Bell polynomials $B_{r,k}(\boldsymbol{\alpha})$, $\boldsymbol{\alpha} = (\alpha_1, \cdots, \alpha_r)$, and Hermite polynomials $H_r(x)$:

$$f(x) = \phi(x) + \phi(x)\sum_{j=1}^{\infty} h_{1j}(x) n^{-j/2}, \quad \text{where}$$

$$h_{1j}(x) = \sum_{k=1}^{j} B_{r,k}(\boldsymbol{\alpha}) H_r(x)/r!, \quad \text{with } r = j+2k.$$

$$F(x) = \Phi(x) - \phi(x)\sum_{j=1}^{\infty} h_{0j}(x) n^{-j/2},$$

$$1 - F(x) = \Phi(-x) + \phi(x)\sum_{j=1}^{\infty} h_{0j}(x) n^{-j/2}, \quad \text{where}$$

$$h_{0j}(x) = \sum_{k=1}^{j} B_{r,k}(\boldsymbol{\alpha}) H_{r-1}(x)/r!, \quad \text{with } r = j+2k.$$

The partial Bell polynomials can be computed efficiently by a recurrence relation:

$$B_{r,k}(\boldsymbol{\alpha}) = \sum_{i=1}^{r-k+1} \binom{r-1}{i-1} \alpha_i B_{r-i,k-1}(\boldsymbol{\alpha}), \quad \text{where}$$

$$B_{0,0} = 1; \quad B_{r,0} = 0 \text{ (for } r \ge 1); \quad B_{0,k} = 0 \text{ (for } k \ge 1); \quad B_{r,1}(\boldsymbol{\alpha}) = \alpha_r.$$

The Hermite polynomials are defined by

$$H_0(x) = 1, \quad H_1(x) = x, \quad H_{r+1}(x) = xH_r(x) - rH_{r-1}(x)$$

The following code shows how to call the Edgeworth expansion for the central cdf.

```
def EdgeworthWhithersDemo(self):
    Order = 30
    F = 100
    X = mp.mpf(110)

    kappa = mp.matrix(Order+1, 1)
    kappa[1] = F
    for i in range(2, Order+1):
        kappa[i] = kappa[i - 1] * 2 * (i - 1)

    LeftTail1, RightTail1 = self.EdgeworthWhithers(X, Order, kappa)
    print("EdgeworthWhithers LeftTail1: ", LeftTail1, " RightTail1: ",  RightTail1)
```

This gives the following results:

```
Hello!
X:  110.0 , Z:  0.707106781186547524400844362104849039284 8 ,
mean:  100.0 , sigma:  14.142135623730950488016887242096980785 7
s3:  0.760249938906523268841373326945982264368 2 ,
s4:  0.310696560376927744870908891228809194554 7

j:  1 , s2:  0.007323188157795373284114366290203815819688
j:  2 , s2:  0.000244106271926512442803812209673460527323
j:  3 , s2:  -0.000024275012597136515145490214184194130217 11
j:  4 , s2:  0.000002526386902276474842073713864467689855687
j:  5 , s2:  -0.000000284396453393571901162750504664042110277 5
j:  6 , s2:  0.000000020873385359592273002246472679643569714 42
j:  7 , s2:  -0.000000001797321695705282603398930576647079128807
j:  8 , s2:  0.000000000110571628345128221545086895055796849600 9

LeftTail1:  0.767795219500732193188205545658764614828 51
RightTail1:  0.232204780499267806811794453412335851714 9
```

5.11.2 Cornish-Fisher expansion: general approximation of the qtf and isf

`ctx.cornish_fisher`(*x*, *cumulants*)

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Calculates the Cornish-Fisher approximation of the quantile by using the cumulants of the distribution.

The quantiles of many distribution functions can be approximated by the classical Cornish and Fisher expansion Cornish and Fisher [186], Fisher and Cornish [335]), provided that the cumulants κ_r of the distribution are known (see also Wikipedia [1082]):

$$x = z + \sum_{k=1}^{\infty} n^{-k/2} \xi_k(z)$$

where $\xi_k(z)$ is the collection of all the terms that belong to the k-th power of $n^{-1/2}$. It seems to be easier to describe algorithm AS269 (see Lee and Lin [402]), which is used to calculate the k-th adjustment term $\xi_k(z)$, by giving a program which implements it, rather than to describe it using mathematical formulas:

```
def CornishFisherLee(self, r, x0, ac, adj):
    a = iv.matrix(r+3, 1); d = iv.matrix(r+3, 1)
    h = iv.matrix(3 * (r+3), 1)
    p = iv.matrix((3 * (r+3)) * ((r+3) + 1) // 2, 1)
    x = iv.mpf(x0); cc = -1
    for j in range(1, r+1):
        a[j] = cc * ac[j] / ((j + 1) * (j + 2))
        cc = -cc
    h[1] = -x; h[2] = x * x - 1
    for j in range(3, (3 * r)+1):
        h[j] = -(x * h[j - 1] + (j - 1) * h[j - 2])
    d[1] = -a[1] * h[2]; adj[1] = d[1]; p[1] = d[1]
    p[3] = a[1]; fac = iv.mpf(1); ja = 0
    for j in range(2, r+1):
        fac = fac * j
        bc = iv.mpf(1)
        ja = ja + 3 * (j - 1)
        jb = ja
        for k in range(1, j):
            bcd = bc * d[k]
            bca = bc * a[k]
            jb -= 3 * (j - k)
            for m in range(1, (3 * (j - k))+1):
                jbl = jb + m; jal = ja + m
                p[jal + 1] += bcd * p[jbl]
```

(continues on next page)

(continued from previous page)

```
            p[jal + k + 2] += bca * p[jbl]
        bc = (bc * (j - k)) / k
    p[ja + j + 2] += a[j]; d[j] = 0
    for m in range(2, (3 * j)+1):
        d[j] -= p[ja + m] * h[m - 1]
    p[ja + 1] = d[j]
    adj[j] = d[j] / fac
```

However, if one prefers mathematical formulas, Jaschke [377] gives the following description of the algorithm: "Lee developed a recurrence formula for the k-th adjustment term $\xi_k(z)$ in the Cornish-Fisher expansion, which is implemented in the algorithm AS269 :

$$\xi_k(H) = a_k H^{*(k+1)} - \sum_{j=1}^{k-1} \frac{j}{k} \left(\xi_{k-j}(H) - \xi_{k-j}\right) * \left(\xi_j - a_j H^{*(j+1)}\right) * H, \quad \text{where } a_k = \frac{\kappa_{k+2}}{(k+2)!}.$$

$\xi_k(H)$ is a formal polynomial expression in H with the usual algebraic relations between the summation "$+$" and the "multiplication" "$*$". Once $\xi_k(H)$ is multiplied out in $*$-powers of H, each H^{*k} is to be interpreted as the Hermite polynomial H_k and then the whole term becomes a polynomial in z with the "normal" multiplication "$\cdot$". ξ_k denotes the scalar that results when the "normal" polynomial $\xi_k(H)$ is evaluated at the fixed quantile z, while $\xi_k(H)$ denotes the expression in the $(+, *)$-algebra. In this formula the adjustment of a given order is calculated recursively, the values of lower order adjustments being used in each stage of calculation."

5.11.3 Sheppard correction, cumulants

`ctx.sheppard`(*cumulants*)

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Returns the Sheppard correction term for a vector of cumulants.

The Sheppard correction is typically applied to the cumulants computed from normally distributed data which have been binned. If κ_r^* is the r-th cumulant of an ungrouped distribution and κ_r the r-th cumulant of an grouped distribution with class interval c, the corrected cumulants (under rather restrictive conditions) are

$$\kappa_r^* = \begin{cases} \kappa_r & \text{for } r \text{ odd} \\ \kappa_r - \frac{B_r}{r} c^r & \text{for } r \text{ even.} \end{cases}$$

where B_r is the r-th Bernoulli number. The same correction can be applied to the cumulants of the continuity-corrected test statistic of a random variable following a lattice distribution with step c. The (continuous) Edgeworth and Cornish-Fisher expansions using these corrected cumulants will then achieve the usual $o(n^{1-r/2})$ error terms of these expansions (see Kolassa and McCullagh [394]), despite the fact that the approximated CDF is discontinuous with jumps of order $O(n^{-1/2})$.

A similar correction can be applied to the cumulant generating function (and its derivatives), as it is needed by the Lugannani-Rice saddle point approximation.

5.11.4 The Sheppard correction, cumulant generating function

`ctx.sheppard_per_cgf`(*cgf*)

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Returns the Sheppard correction term for cumulant generating function of a discrete ("lattice") random variable.

The Sheppard correction is typically applied to the cumulants computed from normally distributed data which have been binned. If κ_r^* is the r-th cumulant of an ungrouped distribution and κ_r the r-th cumulant of an grouped distribution with class interval c, the corrected cumulants (under rather restrictive conditions) are

$$\kappa_r^* = \begin{cases} \kappa_r & \text{for } r \text{ odd} \\ \kappa_r - \frac{B_r}{r} c^r & \text{for } r \text{ even.} \end{cases}$$

where B_r is the r-th Bernoulli number. The same correction can be applied to the cumulants of the continuity-corrected test statistic of a random variable following a lattice distribution with step c. The (continuous) Edgeworth and Cornish-Fisher expansions using these corrected cumulants will then achieve the usual $o(n^{1-r/2})$ error terms of these expansions (see Kolassa and McCullagh [394]), despite the fact that the approximated CDF is discontinuous with jumps of order $O(n^{-1/2})$.

A similar correction can be applied to the cumulant generating function (and its derivatives), as it is needed by the Lugannani-Rice saddlepoint approximation.

5.11.5 Lugannini-Rice expansion: general approximation of the pdf, cdf, and sf

`ctx.luggannini_rice`(*x*, *s*, *poly_t cgf_series*)

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Calculates the Lugannini-Rice saddlepoint approximation of the pdf by using the cumulant generating function and its derivatives.

See also Butler [165], Daniels [195], Daniels [196], Lugannani and Rice [408], Wikipedia [1117], Wikipedia [1133].

Suppose the moment generating function of the random variable X is analytic and given by $M(t)$ for t in some open neighbourhood of zero. Let $K(t) = \log(M(t))$ be the cumulant generating function of X, and denote by $K^{(j)}(t)$ the j^{th} derivative of $K(t)$.

Let $F(x)$ and $f(x)$ denote the CDF and pdf of X, respectively, and $\Phi(\cdot)$ and $\phi(\cdot)$ denote the CDF and pdf of the normal distribution, respectively. Let s be the solution to the saddlepoint equation $K^{(1)}(s) = x$, which in general needs to be solved numerically. Then

$$f(x) \approx \phi(w) \sum_{k=0}^{\infty} C_k,$$

$$F(x) \approx \Phi(w) + \phi(w) \sum_{k=0}^{\infty} (A_k - B_k), \quad \text{and}$$

$$1 - F(x) \approx \Phi(-w) - \phi(w) \sum_{k=0}^{\infty} (A_k - B_k), \quad \text{where}$$

$$w = \operatorname{sgn}(s)\sqrt{2(sK^{(1)}(s) - K(s))}; \quad t = \sqrt{K^{(2)}(s)}; \quad u = st.$$

The coefficients A_k, B_k and C_k are calculated as follows:

$$A_0 = \frac{1}{u}, \quad A_j = A_0 \sum_{n=0}^{2j} \left(\frac{1}{u}\right)^{2j-n} \sum_{m=0}^{n} d_{m,n} \, (-2)^{m+j} \left(\tfrac{1}{2}\right)_{m+j},$$

where $d_{m,n}$ is computed (with $d_{0,0} = 1$ and $d_{0,n} = 0$ for $n > 0$) from

$$d_{m+1,n+1} = \frac{1}{n+1} \sum_{j=1}^{n-m+1} \frac{j}{(j+2)!} \frac{K^{(j+2)}(s)}{t^{j+2}} \, d_{m,n-j+1}, \quad 0 \le m \le n.$$

$$B_0 = \frac{1}{w}, \quad B_j = \frac{-2(j - \frac{1}{2})B_{j-1}}{w^2}.$$

$$C_0 = \frac{1}{t}, \quad C_j = \sum_{m=1}^{2j} d_{m,2j} \, (-2)^{m+j} \left(\tfrac{1}{2}\right)_{m+j}.$$

5.11.6 Jensen expansion: general approximation of the qtf and isf

`ctx.jensen_inv(q, s, x0, poly_t cgf_series)`

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Calculates the Jensen approximation of the qtf and isf

Using the same notation as above, Jensen [378] derived the following approximation (see also Wang [788]):

$$F(x) \approx \Phi(r(s)), \quad \text{where}$$

$$w(s) = \operatorname{sgn}(s)\sqrt{2(sK'(s) - K(s))},$$

$$u(s) = s\sqrt{K''(s)},$$

$$r(s) = w(s) + \frac{v(s)}{w(s)}, \quad \text{where } v(s) = \log\frac{u(s)}{w(s)}.$$

To obtain an approximation to the α-quantile of $F(x)$, we start with a reasonable estimate, say, x_0, and convert this to the corresponding saddlepoint, say s_0, such that $K'(s_0) = x_0$.

Let z_α be the α-quantile of the standard normal distribution. We wish to solve for s in the equation

$$h(s) = w(s) + \frac{v(s)}{w(s)} - z_\alpha = 0.$$

Starting with $n = 0$, we compute successive approximations using Newton iterations as

$$s_{n+1} = s_n - \frac{h(s_n)}{h'(s_n)}, \quad \text{where}$$

$$h'(s) = w'(s) + \frac{w(s)u'(s) - u(s)w'(s)\,(v(s)+1)}{u(s)w(s)^2},$$

$$w'(s) = \operatorname{sgn}(s)\frac{sK''(s)}{\sqrt{2sK'(s) - 2K(s)}} = \operatorname{sgn}(s)\frac{sK''(s)}{w(s)},$$

$$u'(s) = \frac{sK^{(3)}(s) + 2K''(s)}{2\sqrt{K''(s)}}.$$

The final estimate x_{n+1} of the α-quantile of $F(x)$ is then obtained as $x_{n+1} = K'(s_{n+1})$.

5.11.7 Box-Davis expansion: general approximation of the pdf, cdf and sf

`ctx.box_davis_expansion(x, f, rho, omega)`

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Calculates the Box-Davis approximation of the pdf, cdf and sf

The Box-Davis expansion supports a general class of random variables, say X, with absolutely continuous distribution functions, for which the logarithm of the characteristic function, say $\log[C_X(t)]$, may be validly represented by an asymptotic series

$$\log[C_X(t)] \sim -\frac{1}{2}f\log(1-2it) + \sum_{r=1}^{\infty}\omega_r(\rho)\left[(1-2it)^{-r} - 1\right],$$

corresponding to a limiting chi-squared distribution with f degrees of freedom, where ρ is chosen in such a way that $\omega_1 = 0$, whenever this is possible.

The first comprehensive review of this type of expansion for the CDF is due to Box (see Box [35]). The corresponding expansion for the inverse CDF is due to Davis (see Davis [204]), who also gave algorithms for variables with characteristic functions

different from those considered by Box. We refer therefore to this system of asymptotic expansions as the Box-Davis expansion. Distributions covered by this expansion include the beta distribution, the distribution of the product of independent beta variables, Wilks' Lambda, Mauchley's test for sphericity, Bartletts test for equality of independent covariance matrices, Hotelling's T^2 and Pillai's V. For more information, see Anderson [9] and Ginzberg [347].

Let θ be a suitably chosen constant (which will usually be proportional to sample size). We define

$$a_0 = 1; \quad a_j = \frac{1}{j}\sum_{l=1}^{j} l\omega_l a_{j-l}, \quad j > 0.$$

$$\log(K_B) = -\sum_{j=1}^{r} \omega_j + O(\theta^{-r-1}),$$

Then X follows asymptotically (with $\theta \to \infty$) a χ^2-distribution with f degrees of freedom, and the pdf, CDF of M can be developed into asymptotic expansions including terms of order $O(\theta^{-r})$, depending only on f, ρ, K_B and a_j:

$$\text{pdf}_X(x)) = \rho K_B \sum_{j=0}^{r} a_j f_{\chi^2_{f+2j}}(\rho x) + O(\theta^{-r-1})$$

$$\text{cdf}_X(x) = K_B \sum_{j=0}^{r} a_j F_{\chi^2_{f+2j}}(\rho x) + O(\theta^{-r-1})$$

$$1 - \text{cdf}_X(x) = K_B \sum_{j=0}^{r} a_j \left[1 - F_{\chi^2_{f+2j}}(\rho x)\right] + O(\theta^{-r-1})$$

Gupta and Tang (see Gupta and Tang [354]) show that the above series are convergent as $r \to \infty$ for fixed $x < 4\pi\theta$.

When calling the following functions, only f, ρ and ω_j need to be supplied by the user. K_B and a_j are calculated internally.

5.11.8 Box-Davis expansion: general approximation of the qtf and isf (for $\omega_1 = 0$)

`ctx.box_davis_expansion_inv(`x, f, *rho*, *omega*`)`

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

The Box-Davis expansion can be inverted efficiently in a two-step procedure. In the first step, an initial estimate is obtained, using the procedure given below. In the second step, the initial estimate is used as starting point of a Newton iteration, using the functions of the previous section.

Assuming $\omega_1 = 0$, an approximation of the quantile function of X, $\text{qtf}_X(q))$, in terms of the quantiles of a χ^2-distribution with f degrees of freedom, say $u = \chi^2_{f,\alpha}$, can be given as $\text{qtf}_X(q)) = (u + 2S)/\rho + O(\theta^{-8})$, where S is a polynomial in u, whose coefficients depend only on f and ω_j (see Davis [204]).

$$\begin{aligned} S &= \omega_2 P_2(u) \\ &+ \omega_3 P_3(u) \\ &+ \omega_4 P_4(u) + \tfrac{1}{2}\omega_2^2 P_{2,2}(u) \\ &+ \omega_5 P_5(u) + \omega_3\omega_2 P_{3,2}(u) \\ &+ \omega_6 P_6(u) + \omega_4\omega_2 P_{4,2}(u) + \tfrac{1}{2}\omega_3^2 P_{3,3}(u) + \tfrac{1}{6}\omega_2^3 P_{2,2,2}(u) \\ &+ \omega_7 P_7(u) + \omega_5\omega_2 P_{5,2}(u) + \omega_4\omega_3 P_{4,3}(u) + \tfrac{1}{2}\omega_3\omega_2^2 P_{3,2,2}(u), \end{aligned}$$

$$P_r(u) = \frac{u}{f_1} + \ldots + \frac{u^r}{f_r}, \quad f_r = f(f+2)\ldots(f+2r-2),$$

$$P_{2,2} = -\frac{8u^4(f+3)}{(f_2 f_4)} + \frac{8u^3}{(f_2 f_3)} + \frac{6u^2}{(f f_2)} + \frac{2u}{f^2}$$

$$P_{3,2} = -\frac{12u^5(f+4)}{(f_2f_5)} - \frac{2u^4(f-6)}{(f_2f_4)} + \frac{2u^3(3f+10)}{(f_2f_3)} + \frac{6u^2}{(ff_2)} + \frac{2u}{f^2}$$

$$P_{4,2}(u) = -\frac{16u^6(f+5)}{f_2f_6} - \frac{4u^5(f-4}{f_2f_5}) + \frac{2u^4(3f+14)}{f_2f_4} + \frac{2u^3(3f+10)}{f_2f_3} + \frac{6u^2}{ff_2} + \frac{2u}{f^2},$$

$$P_{3,3}(u) = -\frac{6u^6(3f^2+30f+80)}{f_3f_6} - \frac{6u^5(f_2+2f-16)}{f_3f_5} + \frac{4u^4(f+12)}{f_2f_4} + \frac{4u^3(3f+8)}{f_2f_3} + \frac{6u^2}{ff_2} + \frac{2u}{f^2},$$

$$P_{2,2,2}(u) = \frac{32u^6(7f^2+62f+120)}{f_2^2f_6} - \frac{32u^5(2f^2+37f+96)}{f_2^2f_5} - \frac{8u^4(23f^2+124f+132)}{f_2^2f_4} - \frac{8u^3(f-10)}{ff_2f_3} + \frac{28u^2}{f^2f_2} + \frac{4u}{f^3},$$

$$P_{5,2} = -\frac{20u^7(f+6)}{(f_2f_7)} - \frac{2u^6(3f-10)}{(f_2f_6)} + \frac{2u}{f^2} + 2\sum_{r=2}^{5}\frac{u^r(3f+4r-2)}{f_2f_r}$$

$$P_{4,3}(u) = -\frac{24u^7(f_2+12f+40)}{f_3f_7} - \frac{2u^6(5f_2+18f-80)}{f_3f_6} + \frac{2u^5(f_2+42f+176)}{f_3f_5} + \frac{4u^4(3f+16)}{f_2f_4} + \frac{4u^3(3f+8)}{f_2f_3} + \frac{6u^2}{ff_2} + \frac{2u}{f^2},$$

$$P_{3,2,2}(u) = \frac{192u^7(2f^3+31f^2+154f+240)}{f_2f_3f_7} - \frac{16u^6(4f^3+153f^2+1106f+2160)}{f_2f_3f_6} - \frac{8u^5(35f^3420f^2+1540f+1632)}{f_2f_3f_5} - \frac{4u^4(25f^2+80f+12)}{f_2^2f_4} + \frac{4u^3(7f+38)}{ff_2f_3} + \frac{28u^2}{f^2f_3} + \frac{4u}{f^3}.$$

When calling the following functions, only f, ρ and ω_j need to be supplied by the user. K_B and a_j are calculated internally.

5.12 Mpmath: Function approximation

5.12.1 Pade approximation

`ctx.pade`(a, L, M)

where `ctx` is `dec`, `mpm`, or `gmp`.

Computes a Pade approximation of degree (L, M) to a function. Given at least $L + M + 1$ Taylor coefficients a approximating a function $A(x)$, `pade()` returns coefficients of polynomials P, Q satisfying

$$P = \sum_{k=0}^{L} p_k x^k$$
$$Q = \sum_{k=0}^{M} q_k x^k$$
$$Q_0 = 1$$
$$A(x)Q(x) = P(x) + O(x^{L+M+1})$$

$P(x)/Q(x)$ can provide a good approximation to an analytic function beyond the radius of convergence of its Taylor series (example from G.A. Baker 'Essentials of Pade Approximants' Academic Press, Ch.1A):

```
>>> from xlcalcnet import *
>>> mp.dps = 15; mp.pretty = True
>>> one = mpf(1)
>>> def f(x):
...     return sqrt((one + 2*x)/(one + x))
...
>>> a = taylor(f, 0, 6)
>>> p, q = pade(a, 3, 3)
>>> x = 10
>>> polyval(p[::-1], x)/polyval(q[::-1], x)
1.38169105566806
>>> f(x)
1.38169855941551
```

5.12.2 Chebyshev approximation

`ctx.chebyfit`(f, *interval*, N, *error=False*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Computes a polynomial of degree $N - 1$ that approximates the given function f on the interval $[a, b]$. With `error=True`, `chebyfit()` also returns an accurate estimate of the maximum absolute error; that is, the maximum value of $|f(x) - P(x)|$ for $x \in [a, b]$.

`chebyfit()` uses the Chebyshev approximation formula, which gives a nearly optimal solution: that is, the maximum error of the approximating polynomial is very close to the smallest possible for any polynomial of the same degree.

Chebyshev approximation is very useful if one needs repeated evaluation of an expensive function, such as function defined implicitly by an integral or a differential equation. (For example, it could be used to turn a slow mpmath function into a fast machine-precision version of the same.)

Examples

Here we use `chebyfit()` to generate a low-degree approximation of $f(x) = \cos(x)$, valid on the interval $[1, 2]$:

```
>>> from xlcalcnet import *
>>> mp.dps = 15; mp.pretty = True
>>> poly, err = chebyfit(cos, [1, 2], 5, error=True)
```

(continues on next page)

(continued from previous page)

```
>>> nprint(poly)
[0.00291682, 0.146166, -0.732491, 0.174141, 0.949553]
>>> nprint(err, 12)
1.61351758081e-5
```

The polynomial can be evaluated using `polyval`:

```
>>> nprint(polyval(poly, 1.6), 12)
-0.0291858904138
>>> nprint(cos(1.6), 12)
-0.0291995223013
```

Sampling the true error at 1000 points shows that the error estimate generated by `chebyfit` is remarkably good:

```
>>> error = lambda x: abs(cos(x) - polyval(poly, x))
>>> nprint(max([error(1+n/1000.) for n in range(1000)]), 12)
1.61349954245e-5
```

Choice of degree

The degree N can be set arbitrarily high, to obtain an arbitrarily good approximation. As a rule of thumb, an N-term Chebyshev approximation is good to $N/(b-a)$ decimal places on a unit interval (although this depends on how well-behaved f is). The cost grows accordingly: `chebyfit` evaluates the function $(N^2)/2$ times to compute the coefficients and an additional N times to estimate the error.

Possible issues

One should be careful to use a sufficiently high working precision both when calling `chebyfit` and when evaluating the resulting polynomial, as the polynomial is sometimes ill-conditioned. It is for example difficult to reach 15-digit accuracy when evaluating the polynomial using machine precision floats, no matter the theoretical accuracy of the polynomial. (The option to return the coefficients in Chebyshev form should be made available in the future.)

It is important to note the Chebyshev approximation works poorly if f is not smooth. A function containing singularities, rapid oscillation, etc can be approximated more effectively by multiplying it by a weight function that cancels out the nonsmooth features, or by dividing the interval into several segments.

5.12.3 Fourier series

`ctx.fourier`(*f*, *interval*, *N*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Computes the Fourier series of degree N of the given function on the interval $[a, b]$. More precisely, `fourier()` returns two lists (c, s) of coefficients (the cosine series and sine series, respectively), such that

$$f(x) \sim \sum_{k=0}^{N} c_k \cos(kmx) + s_k \sin(kmx)$$

where $m = 2\pi/(b-a)$.

Note that many texts define the first coefficient as $2c_0$ instead of c_0. The easiest way to evaluate the computed series correctly is to pass it to `fourierval()`.

Examples

The function $f(x) = x$ has a simple Fourier series on the standard interval $[-\pi, \pi]$. The cosine coefficients are all zero (because the function has odd symmetry), and the sine coefficients are rational numbers:

```
>>> from xlcalcnet import *
>>> mp.dps = 15; mp.pretty = True
>>> c, s = fourier(lambda x: x, [-pi, pi], 5)
>>> nprint(c)
[0.0, 0.0, 0.0, 0.0, 0.0, 0.0]
>>> nprint(s)
[0.0, 2.0, -1.0, 0.666667, -0.5, 0.4]
```

This computes a Fourier series of a nonsymmetric function on a nonstandard interval:

```
>>> I = [-1, 1.5]
>>> f = lambda x: x**2 - 4*x + 1
>>> cs = fourier(f, I, 4)
>>> nprint(cs[0])
[0.583333, 1.12479, -1.27552, 0.904708, -0.441296]
>>> nprint(cs[1])
[0.0, -2.6255, 0.580905, 0.219974, -0.540057]
```

It is instructive to plot a function along with its truncated Fourier series:

```
>>> plot([f, lambda x: fourierval(cs, I, x)], I)
```

Fourier series generally converge slowly (and may not converge pointwise). For example, if $f(x) = \cosh(x)$, a 10-term Fourier series gives an L^2 error corresponding to 2-digit accuracy:

```
>>> I = [-1, 1]
>>> cs = fourier(cosh, I, 9)
>>> g = lambda x: (cosh(x) - fourierval(cs, I, x))**2
>>> nprint(sqrt(quad(g, I)))
0.00467963
```

`fourier()` uses numerical quadrature. For nonsmooth functions, the accuracy (and speed) can be improved by including all singular points in the interval specification:

```
>>> nprint(fourier(abs, [-1, 1], 0), 10)
([0.5000441648], [0.0])
>>> nprint(fourier(abs, [-1, 0, 1], 0), 10)
([0.5], [0.0])
```

5.12.4 Fourier series evaluation

`ctx.fourierval(`*series*, *interval*, *x*`)`

where `ctx` is `dec`, `mpm`, or `gmp`.

Evaluates a Fourier series (in the format computed by by `fourier()` for the given interval) at the point x.

The series should be a pair (c, s) where c is the cosine series and s is the sine series. The two lists need not have the same length.

5.13 Mpmath: Sums, products, limits and extrapolation

5.13.1 Summation of infinite series

`ctx.nsum`(*f*, **intervals*, ***options*)

where `ctx` is `dec`, `mpm`, or `gmp`.

See also: Wikipedia [1112].

Computes the sum

$$S = \sum_{k=a}^{b} f(k)$$

where (a, b) = *interval*, and where $a = -\infty$ and/or $b = \infty$ are allowed, or more generally

$$S = \sum_{k_1=a_1}^{b_1} \cdots \sum_{k_n=a_n}^{b_n} f(k_1, \ldots, k_n)$$

if multiple intervals are given.

Two examples of infinite series that can be summed by `nsum()`, where the first converges rapidly and the second converges slowly, are:

```
>>> from xlcalcnet import *
>>> mp.dps = 15; mp.pretty = True
>>> nsum(lambda n: 1/fac(n), [0, inf])
2.71828182845905
>>> nsum(lambda n: 1/n**2, [1, inf])
1.64493406684823
```

When appropriate, `nsum()` applies convergence acceleration to accurately estimate the sums of slowly convergent series. If the series is finite, `nsum()` currently does not attempt to perform any extrapolation, and simply calls `fsum()`.

Multidimensional infinite series are reduced to a single-dimensional series over expanding hypercubes; if both infinite and finite dimensions are present, the finite ranges are moved innermost. For more advanced control over the summation order, use nested calls to `nsum()`, or manually rewrite the sum as a single-dimensional series.

Options

tol
Desired maximum final error. Defaults roughly to the epsilon of the working precision.

method
Which summation algorithm to use (described below). Default: `'richardson+shanks'`.

maxterms
Cancel after at most this many terms. Default: 10*dps.

steps
An iterable giving the number of terms to add between each extrapolation attempt. The default sequence is [10, 20, 30, 40, ...]. For example, if you know that approximately 100 terms will be required, efficiency might be improved by setting this to [100, 10]. Then the first extrapolation will be performed after 100 terms, the second after 110, etc.

verbose
Print details about progress.

ignore
If enabled, any term that raises `ArithmeticError` or `ValueError` (e.g. through division by zero) is replaced by a zero. This is convenient for lattice sums with a singular term near the origin.

Methods

Unfortunately, an algorithm that can efficiently sum any infinite series does not exist. `nsum()` implements several different algorithms that each work well in different cases. The *method* keyword argument selects a method.

The default method is `'r+s'`, i.e. both Richardson extrapolation and Shanks transformation is attempted. A slower method that handles more cases is `'r+s+e'`. For very high precision summation, or if the summation needs to be fast (for example if multiple sums need to be evaluated), it is a good idea to investigate which one method works best and only use that.

`'richardson'` / `'r'`:
Uses Richardson extrapolation. Provides useful extrapolation when $f(k) \sim P(k)/Q(k)$ or when $f(k) \sim (-1)^k P(k)/Q(k)$ for polynomials P and Q. See `richardson()` for additional information.

`'shanks'` / `'s'`:
Uses Shanks transformation. Typically provides useful extrapolation when $f(k) \sim c^k$ or when successive terms alternate signs. Is able to sum some divergent series. See `shanks()` for additional information.

`'levin'` / `'l'`:
Uses the Levin transformation. It performs better than the Shanks transformation for logarithmic convergent or alternating divergent series. The `'levin_variant'`-keyword selects the variant. Valid choices are "u", "t", "v" and "all" whereby "all" uses all three u,t and v simultanously (This is good for performance comparison in conjunction with "verbose=True"). Instead of the Levin transform one can also use the Sidi-S transform by selecting the method `'sidi'`. See `levin()` for additional details.

`'alternating'` / `'a'`:
This is the convergence acceleration of alternating series developped by Cohen, Villegras and Zagier. See `cohen_alt()` for additional details.

`'euler-maclaurin'` / `'e'`:
Uses the Euler-Maclaurin summation formula to approximate the remainder sum by an integral. This requires high-order numerical derivatives and numerical integration. The advantage of this algorithm is that it works regardless of the decay rate of f, as long as f is sufficiently smooth. See `sumem()` for additional information.

`'direct'` / `'d'`:
Does not perform any extrapolation. This can be used (and should only be used for) rapidly convergent series. The summation automatically stops when the terms decrease below the target tolerance.

Basic examples

A finite sum:

```
>>> nsum(lambda k: 1/k, [1, 6])
2.45
```

Summation of a series going to negative infinity and a doubly infinite series:

```
>>> nsum(lambda k: 1/k**2, [-inf, -1])
1.64493406684823
>>> nsum(lambda k: 1/(1+k**2), [-inf, inf])
3.15334809493716
```

`nsum()` handles sums of complex numbers:

```
>>> nsum(lambda k: (0.5+0.25j)**k, [0, inf])
(1.6 + 0.8j)
```

The following sum converges very rapidly, so it is most efficient to sum it by disabling convergence acceleration:

```
>>> mp.dps = 1000
>>> a = nsum(lambda k: -(-1)**k * k**2 / fac(2*k), [1, inf],
...     method='direct')
```

(continues on next page)

(continued from previous page)

```
>>> b = (cos(1)+sin(1))/4
>>> abs(a-b) < mpf('1e-998')
True
```

Examples with Richardson extrapolation

Richardson extrapolation works well for sums over rational functions, as well as their alternating counterparts:

```
>>> mp.dps = 50
>>> nsum(lambda k: 1 / k**3, [1, inf],
...     method='richardson')
1.2020569031595942853997381615114499907649862923405
>>> zeta(3)
1.2020569031595942853997381615114499907649862923405

>>> nsum(lambda n: (n + 3)/(n**3 + n**2), [1, inf],
...     method='richardson')
2.9348022005446793094172454999380755676568497036204
>>> pi**2/2-2
2.9348022005446793094172454999380755676568497036204

>>> nsum(lambda k: (-1)**k / k**3, [1, inf],
...     method='richardson')
-0.90154267736969571404980362113358749307373971925537
>>> -3*zeta(3)/4
-0.90154267736969571404980362113358749307373971925538
```

Examples with Shanks transformation

The Shanks transformation works well for geometric series and typically provides excellent acceleration for Taylor series near the border of their disk of convergence. Here we apply it to a series for $\log(2)$, which can be seen as the Taylor series for $\log(1+x)$ with $x = 1$:

```
>>> nsum(lambda k: -(-1)**k/k, [1, inf],
...     method='shanks')
0.69314718055994530941723212145817656807550013436025
>>> log(2)
0.69314718055994530941723212145817656807550013436025
```

Here we apply it to a slowly convergent geometric series:

```
>>> nsum(lambda k: mpf('0.995')**k, [0, inf],
...     method='shanks')
200.0
```

Finally, Shanks' method works very well for alternating series where $f(k) = (-1)^k g(k)$, and often does so regardless of the exact decay rate of $g(k)$:

```
>>> mp.dps = 15
>>> nsum(lambda k: (-1)**(k+1) / k**1.5, [1, inf],
...     method='shanks')
0.765147024625408
>>> (2-sqrt(2))*zeta(1.5)/2
0.765147024625408
```

The following slowly convergent alternating series has no known closed-form value. Evaluating the sum a second time at higher precision indicates that the value is probably correct:

```
>>> nsum(lambda k: (-1)**k / log(k), [2, inf],
...     method='shanks')
0.924299897222939
>>> mp.dps = 30
```

(continues on next page)

(continued from previous page)

```
>>> nsum(lambda k: (-1)**k / log(k), [2, inf],
...     method='shanks')
0.92429989722293885595957018136
```

Examples with Levin transformation

The following example calculates Euler's constant as the constant term in the Laurent expansion of zeta(s) at s=1. This sum converges extremly slow because of the logarithmic convergence behaviour of the Dirichlet series for zeta.

```
>>> mp.dps = 30
>>> z = mp.mpf(10) ** (-10)
>>> a = mp.nsum(lambda n: n**(-(1+z)), [1, mp.inf], method = "levin") - 1 / z
>>> print(mp.chop(a - mp.euler, tol = 1e-10))
0.0
```

Now we sum the zeta function outside its range of convergence (attention: This does not work at the negative integers!):

```
>>> mp.dps = 15
>>> w = mp.nsum(lambda n: n ** (2 + 3j), [1, mp.inf], method = "levin", levin_variant = "v")
>>> print(mp.chop(w - mp.zeta(-2-3j)))
0.0
```

The next example resummates an asymptotic series expansion of an integral related to the exponential integral.

```
>>> mp.dps = 15
>>> z = mp.mpf(10)
>>> # exact = mp.quad(lambda x: mp.exp(-x)/(1+x/z),[0,mp.inf])
>>> exact = z * mp.exp(z) * mp.expint(1,z) # this is the symbolic expression for the integral
>>> w = mp.nsum(lambda n: (-1) ** n * mp.fac(n) * z ** (-n), [0, mp.inf], \
...   method = "sidi", levin_variant = "t")
>>> print(mp.chop(w - exact))
0.0
```

Following highly divergent asymptotic expansion needs some care. Firstly we need copious amount of working precision. Secondly the stepsize must not be chosen to large, otherwise nsum may miss the point where the Levin transform converges and reach the point where only numerical garbage is produced due to numerical cancellation.

```
>>> mp.dps = 15
>>> z = mp.mpf(2)
>>> # exact = mp.quad(lambda x: mp.exp( -x * x / 2 - z * x ** 4), [0,mp.inf]) * 2 / mp.sqrt(2 * mp.pi)
>>>  # the following is the symbolic expression for the integral
>>> exact = mp.exp(mp.one / (32 * z)) * mp.besselk(mp.one / 4, \
...   mp.one / (32 * z)) / (4 * mp.sqrt(z * mp.pi))
>>> w = mp.nsum(lambda n: (-z)**n * mp.fac(4 * n) / (mp.fac(n) * mp.fac(2 * n) * (4 ** n)),
...   [0, mp.inf], method = "levin", levin_variant = "t", workprec = 8*mp.prec,
...   steps = [2] + [1 for x in xrange(1000)])
>>> print(mp.chop(w - exact))
0.0
```

The hypergeometric function can also be summed outside its range of convergence:

```
>>> mp.dps = 15
>>> z = 2 + 1j
>>> exact = mp.hyp2f1(2 / mp.mpf(3), 4 / mp.mpf(3), 1 / mp.mpf(3), z)
>>> f = lambda n: mp.rf(2 / mp.mpf(3), n) * mp.rf(4 / mp.mpf(3), n) * z**n \
...   / (mp.rf(1 / mp.mpf(3), n) * mp.fac(n))
>>> v = mp.nsum(f, [0, mp.inf], method = "levin", steps = [10 for x in xrange(1000)])
>>> print(mp.chop(exact-v))
0.0
```

Examples with Cohen's alternating series resummation

The next example sums the alternating zeta function:

```
>>> v = mp.nsum(lambda n: (-1)**(n-1) / n, [1, mp.inf], method = "a")
>>> print(mp.chop(v - mp.log(2)))
0.0
```

The derivate of the alternating zeta function outside its range of convergence:

```
>>> v = mp.nsum(lambda n: (-1)**n * mp.log(n) * n, [1, mp.inf], method = "a")
>>> print(mp.chop(v - mp.diff(lambda s: mp.altzeta(s), -1)))
0.0
```

Examples with Euler-Maclaurin summation

The sum in the following example has the wrong rate of convergence for either Richardson or Shanks to be effective.

```
>>> f = lambda k: log(k)/k**2.5
>>> mp.dps = 15
>>> nsum(f, [1, inf], method='euler-maclaurin')
0.38734195032621
>>> -diff(zeta, 2.5)
0.38734195032621
```

Increasing `steps` improves speed at higher precision:

```
>>> mp.dps = 50
>>> nsum(f, [1, inf], method='euler-maclaurin', steps=[250])
0.38734195032620997271199237593105101319948228874688
>>> -diff(zeta, 2.5)
0.38734195032620997271199237593105101319948228874688
```

Divergent series

The Shanks transformation is able to sum some *divergent* series. In particular, it is often able to sum Taylor series beyond their radius of convergence (this is due to a relation between the Shanks transformation and Pade approximations; see `pade()` for an alternative way to evaluate divergent Taylor series). Furthermore the Levin-transform examples above contain some divergent series resummation.

Here we apply it to $\log(1+x)$ far outside the region of convergence:

```
>>> mp.dps = 50
>>> nsum(lambda k: -(-9)**k/k, [1, inf],
...     method='shanks')
2.3025850929940456840179914546843642076011014886288
>>> log(10)
2.3025850929940456840179914546843642076011014886288
```

A particular type of divergent series that can be summed using the Shanks transformation is geometric series. The result is the same as using the closed-form formula for an infinite geometric series:

```
>>> mp.dps = 15
>>> for n in range(-8, 8):
...     if n == 1:
...         continue
...     print("%s %s %s" % (mpf(n), mpf(1)/(1-n),
...         nsum(lambda k: n**k, [0, inf], method='shanks')))
...
-8.0 0.111111111111111 0.111111111111111
-7.0 0.125 0.125
-6.0 0.142857142857143 0.142857142857143
-5.0 0.166666666666667 0.166666666666667
-4.0 0.2 0.2
-3.0 0.25 0.25
-2.0 0.333333333333333 0.333333333333333
-1.0 0.5 0.5
```

(continues on next page)

(continued from previous page)

```
0.0 1.0 1.0
2.0 -1.0 -1.0
3.0 -0.5 -0.5
4.0 -0.333333333333333 -0.333333333333333
5.0 -0.25 -0.25
6.0 -0.2 -0.2
7.0 -0.166666666666667 -0.166666666666667
```

Multidimensional sums

Any combination of finite and infinite ranges is allowed for the summation indices:

```
>>> mp.dps = 15
>>> nsum(lambda x,y: x+y, [2,3], [4,5])
28.0
>>> nsum(lambda x,y: x/2**y, [1,3], [1,inf])
6.0
>>> nsum(lambda x,y: y/2**x, [1,inf], [1,3])
6.0
>>> nsum(lambda x,y,z: z/(2**x*2**y), [1,inf], [1,inf], [3,4])
7.0
>>> nsum(lambda x,y,z: y/(2**x*2**z), [1,inf], [3,4], [1,inf])
7.0
>>> nsum(lambda x,y,z: x/(2**z*2**y), [3,4], [1,inf], [1,inf])
7.0
```

Some nice examples of double series with analytic solutions or reductions to single-dimensional series (see MathWorld [1025]):

```
>>> nsum(lambda m, n: 1/2**(m*n), [1,inf], [1,inf])
1.60669515241529
>>> nsum(lambda n: 1/(2**n-1), [1,inf])
1.60669515241529

>>> nsum(lambda i,j: (-1)**(i+j)/(i**2+j**2), [1,inf], [1,inf])
0.278070510848213
>>> pi*(pi-3*ln2)/12
0.278070510848213

>>> nsum(lambda i,j: (-1)**(i+j)/(i+j)**2, [1,inf], [1,inf])
0.129319852864168
>>> altzeta(2) - altzeta(1)
0.129319852864168

>>> nsum(lambda i,j: (-1)**(i+j)/(i+j)**3, [1,inf], [1,inf])
0.0790756439455825
>>> altzeta(3) - altzeta(2)
0.0790756439455825

>>> nsum(lambda m,n: m**2*n/(3**m*(n*3**m+m*3**n)),
...     [1,inf], [1,inf])
0.28125
>>> mpf(9)/32
0.28125

>>> nsum(lambda i,j: fac(i-1)*fac(j-1)/fac(i+j),
...     [1,inf], [1,inf], workprec=400)
1.64493406684823
>>> zeta(2)
1.64493406684823
```

A hard example of a multidimensional sum is the Madelung constant in three dimensions (see MathWorld [1029]). The defining sum converges very slowly and only conditionally, so `nsum()` is lucky to obtain an accurate value through convergence acceleration. The second evaluation below uses a much more efficient, rapidly convergent 2D sum:

```
>>> nsum(lambda x,y,z: (-1)**(x+y+z)/(x*x+y*y+z*z)**0.5,
...     [-inf,inf], [-inf,inf], [-inf,inf], ignore=True)
-1.74756459463318
>>> nsum(lambda x,y: -12*pi*sech(0.5*pi * \
...     sqrt((2*x+1)**2+(2*y+1)**2))**2, [0,inf], [0,inf])
-1.74756459463318
```

Another example of a lattice sum in 2D:

```
>>> nsum(lambda x,y: (-1)**(x+y) / (x**2+y**2), [-inf,inf],
...     [-inf,inf], ignore=True)
-2.1775860903036
>>> -pi*ln2
-2.1775860903036
```

An example of an Eisenstein series:

```
>>> nsum(lambda m,n: (m+n*1j)**(-4), [-inf,inf], [-inf,inf],
...     ignore=True)
(3.1512120021539 + 0.0j)
```

5.13.2 Summation using the Euler-Maclaurin formula

ctx.sumem(*f*, *interval*, *tol=None*, *reject=10*, *integral=None*, *adiffs=None*, *bdiffs=None*, *verbose=False*, *error=False*, *_fast_abort=False*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Uses the Euler-Maclaurin formula to compute an approximation accurate to within `tol` (which defaults to the present epsilon) of the sum

$$S = \sum_{k=a}^{b} f(k)$$

where (a, b) are given by `interval` and a or b may be infinite. The approximation is

$$S \sim \int_a^b f(x)\,\mathrm{d}x + \frac{f(a)+f(b)}{2} + \sum_{k=1}^{\infty} \frac{B_{2k}}{(2k)!}\left(f^{(2k-1)}(b) - f^{(2k-1)}(a)\right).$$

The last sum in the Euler-Maclaurin formula is not generally convergent (a notable exception is if f is a polynomial, in which case Euler-Maclaurin actually gives an exact result).

The summation is stopped as soon as the quotient between two consecutive terms falls below *reject*. That is, by default (*reject* = 10), the summation is continued as long as each term adds at least one decimal.

Although not convergent, convergence to a given tolerance can often be "forced" if $b = \infty$ by summing up to $a + N$ and then applying the Euler-Maclaurin formula to the sum over the range $(a + N + 1, \ldots, \infty)$. This procedure is implemented by `nsum()`.

By default numerical quadrature and differentiation is used. If the symbolic values of the integral and endpoint derivatives are known, it is more efficient to pass the value of the integral explicitly as `integral` and the derivatives explicitly as `adiffs` and `bdiffs`. The derivatives should be given as iterables that yield $f(a), f'(a), f''(a), \ldots$ (and the equivalent for b).

Examples

Summation of an infinite series, with automatic and symbolic integral and derivative values (the second should be much faster):

```
>>> from xlcalcnet import *
>>> mp.dps = 50; mp.pretty = True
>>> sumem(lambda n: 1/n**2, [32, inf])
```

(continues on next page)

(continued from previous page)

```
0.031743366520302090126581680438741427141321886413417
>>> I = mpf(1)/32
>>> D = adiffs=((-1)**n*fac(n+1)*32**(-2-n) for n in range(999))
>>> sumem(lambda n: 1/n**2, [32, inf], integral=I, adiffs=D)
0.031743366520302090126581680438741427141321886413417
```

An exact evaluation of a finite polynomial sum:

```
>>> sumem(lambda n: n**5-12*n**2+3*n, [-100000, 200000])
10500155000624963999742499550000.0
>>> print(sum(n**5-12*n**2+3*n for n in range(-100000, 200001)))
10500155000624963999742499550000
```

5.13.3 Summation using the Abel-Plana formula

`ctx.`**`sumap`**(*f*, *interval*, *integral=None*, *error=False*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Evaluates an infinite series of an analytic summand f using the Abel-Plana formula

$$\sum_{k=0}^{\infty} f(k) = \int_0^{\infty} f(t)\mathrm{d}t + \frac{1}{2}f(0) + i\int_0^{\infty} \frac{f(it) - f(-it)}{e^{2\pi t} - 1}\mathrm{d}t.$$

Unlike the Euler-Maclaurin formula (see `sumem()`), the Abel-Plana formula does not require derivatives. However, it only works when $|f(it) - f(-it)|$ does not increase too rapidly with t.

Examples

The Abel-Plana formula is particularly useful when the summand decreases like a power of k; for example when the sum is a pure zeta function:

```
>>> from xlcalcnet import *
>>> mp.dps = 25; mp.pretty = True
>>> sumap(lambda k: 1/k**2.5, [1,inf])
1.341487257250917179756 77
>>> zeta(2.5)
1.341487257250917179756 77
>>> sumap(lambda k: 1/(k+1j)**(2.5+2.5j), [1,inf])
(-3.385361068546473342286084 - 0.743208210519632180386955 1j)
>>> zeta(2.5+2.5j, 1+1j)
(-3.385361068546473342286084 - 0.743208210519632180386955 1j)
```

If the series is alternating, numerical quadrature along the real line is likely to give poor results, so it is better to evaluate the first term symbolically whenever possible:

```
>>> n=3; z=-0.75
>>> I = expint(n,-log(z))
>>> chop(sumap(lambda k: z**k / k**n, [1,inf], integral=I))
-0.691703603690459451014144 8
>>> polylog(n,z)
-0.691703603690459451014144 8
```

5.13.4 Products

`ctx.`**`nprod`**(*f*, *interval*, *nsum=False*, ***kwargs*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Computes the product

$$P = \prod_{k=a}^{b} f(k)$$

where (a, b) = *interval*, and where $a = -\infty$ and/or $b = \infty$ are allowed.

By default, `nprod()` uses the same extrapolation methods as `nsum()`, except applied to the partial products rather than partial sums, and the same keyword options as for `nsum()` are supported. If `nsum=True`, the product is instead computed via `nsum()` as

$$P = \exp\left(\sum_{k=a}^{b} \log(f(k))\right).$$

This is slower, but can sometimes yield better results. It is also required (and used automatically) when Euler-Maclaurin summation is requested.

Examples

A simple finite product:

```
>>> from xlcalcnet import *
>>> mp.dps = 25; mp.pretty = True
>>> nprod(lambda k: k, [1, 4])
24.0
```

A large number of infinite products have known exact values, and can therefore be used as a reference. Most of the following examples are taken from MathWorld (see MathWorld [1027]).

A few infinite products with simple values are:

```
>>> 2*nprod(lambda k: (4*k**2)/(4*k**2-1), [1, inf])
3.1415926535897932384626433
>>> nprod(lambda k: (1+1/k)**2/(1+2/k), [1, inf])
2.0
>>> nprod(lambda k: (k**3-1)/(k**3+1), [2, inf])
0.66666666666666666666666667
>>> nprod(lambda k: (1-1/k**2), [2, inf])
0.5
```

Next, several more infinite products with more complicated values:

```
>>> nprod(lambda k: exp(1/k**2), [1, inf]); exp(pi**2/6)
5.1806683178971157484166260
5.1806683178971157484166260

>>> nprod(lambda k: (k**2-1)/(k**2+1), [2, inf]); pi*csch(pi)
0.27202905498213316295023660
0.27202905498213316295023660

>>> nprod(lambda k: (k**4-1)/(k**4+1), [2, inf])
0.84805404935290039212965020
>>> pi*sinh(pi)/(cosh(sqrt(2)*pi)-cos(sqrt(2)*pi))
0.84805404935290039212965020

>>> nprod(lambda k: (1+1/k+1/k**2)**2/(1+2/k+3/k**2), [1, inf])
1.8489361828582444852249270
>>> 3*sqrt(2)*cosh(pi*sqrt(3)/2)**2*csch(pi*sqrt(2))/pi
1.8489361828582444852249270

>>> nprod(lambda k: (1-1/k**4), [2, inf]); sinh(pi)/(4*pi)
0.91901947759374443017392440
0.91901947759374443017392440
```

(continues on next page)

(continued from previous page)

```
>>> nprod(lambda k: (1-1/k**6), [2, inf])
0.98268427774219251832447 59
>>> (1+cosh(pi*sqrt(3)))/(12*pi**2)
0.98268427774219251832447 59

>>> nprod(lambda k: (1+1/k**2), [2, inf]); sinh(pi)/(2*pi)
1.83803895518748886034784 9
1.83803895518748886034784 9

>>> nprod(lambda n: (1+1/n)**n * exp(1/(2*n)-1), [1, inf])
1.44725592689036529895913 8
>>> exp(1+euler/2)/sqrt(2*pi)
1.44725592689036529895913 8
```

The following two products are equivalent and can be evaluated in terms of a Jacobi theta function. Pi can be replaced by any value (as long as convergence is preserved):

```
>>> nprod(lambda k: (1-pi**-k)/(1+pi**-k), [1, inf])
0.38384512074816724047786 86
>>> nprod(lambda k: tanh(k*log(pi)/2), [1, inf])
0.38384512074816724047786 86
>>> jtheta(4,0,1/pi)
0.38384512074816724047786 86
```

This product does not have a known closed form value:

```
>>> nprod(lambda k: (1-1/2**k), [1, inf])
0.28878809508660242127889 97
```

A product taken from $-\infty$:

```
>>> nprod(lambda k: 1-k**(-3), [-inf,-2])
0.80939659736629010957868 05
>>> cosh(pi*sqrt(3)/2)/(3*pi)
0.80939659736629010957868 05
```

A doubly infinite product:

```
>>> nprod(lambda k: exp(1/(1+k**2)), [-inf, inf])
23.414326882318643374200 35
>>> exp(pi/tanh(pi))
23.414326882318643374200 35
```

A product requiring the use of Euler-Maclaurin summation to compute an accurate value:

```
>>> nprod(lambda k: (1-1/k**2.5), [2, inf], method='e')
0.69615511133623105289812 5
```

5.13.5 Limits, general

`ctx.`**`limit`**(*f*, *x*, *direction=1*, *exp=False*, ***kwargs*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Computes an estimate of the limit

$$\lim_{t \to x} f(t)$$

where x may be finite or infinite.

For finite x, `limit()` evaluates $f(x + d/n)$ for consecutive integer values of n, where the approach direction d may be specified using the *direction* keyword argument. For infinite x, `limit()` evaluates values of $f(\mathrm{sign}(x) \cdot n)$.

If the approach to the limit is not sufficiently fast to give an accurate estimate directly, `limit()` attempts to find the limit using Richardson extrapolation or the Shanks transformation. You can select between these methods using the *method* keyword (see documentation of `nsum()` for more information).

Options

The following options are available with essentially the same meaning as for `nsum()`: *tol*, *method*, *maxterms*, *steps*, *verbose*.

If the option *exp=True* is set, f will be sampled at exponentially spaced points $n = 2^1, 2^2, 2^3, \ldots$ instead of the linearly spaced points $n = 1, 2, 3, \ldots$. This can sometimes improve the rate of convergence so that `limit()` may return a more accurate answer (and faster). However, do note that this can only be used if f supports fast and accurate evaluation for arguments that are extremely close to the limit point (or if infinite, very large arguments).

Examples

A basic evaluation of a removable singularity:

```
>>> from xlcalcnet import *
>>> mp.dps = 30; mp.pretty = True
>>> limit(lambda x: (x-sin(x))/x**3, 0)
0.166666666666666666666666666667
```

Computing the exponential function using its limit definition:

```
>>> limit(lambda n: (1+3/n)**n, inf)
20.085536923187667740928529654
>>> exp(3)
20.085536923187667740928529654
```

A limit for π:

```
>>> f = lambda n: 2**(4*n+1)*fac(n)**4/(2*n+1)/fac(2*n)**2
>>> limit(f, inf)
3.1415926535897932384626433832
```

Calculating the coefficient in Stirling's formula:

```
>>> limit(lambda n: fac(n) / (sqrt(n)*(n/e)**n), inf)
2.5066282746310005024157652848
>>> sqrt(2*pi)
2.5066282746310005024157652848
```

Evaluating Euler's constant γ using the limit representation

$$\gamma = \lim_{n \to \infty} \left[\left(\sum_{k=1}^{n} \frac{1}{k} \right) - \log(n) \right]$$

(which converges notoriously slowly):

```
>>> f = lambda n: sum([mpf(1)/k for k in range(1,int(n)+1)]) - log(n)
>>> limit(f, inf)
0.57721566490153286060651209008
>>> +euler
0.57721566490153286060651209008
```

With default settings, the following limit converges too slowly to be evaluated accurately. Changing to exponential sampling however gives a perfect result:

```
>>> f = lambda x: sqrt(x**3+x**2)/(sqrt(x**3)+x)
>>> limit(f, inf)
0.99283115855833028112924968649
>>> limit(f, inf, exp=True)
1.0
```

5.13.6 Richardson extrapolation

`ctx.richardson`(*seq*)

where `ctx` is `dec`, `mpm`, or `gmp`.

See also: Wikipedia [1109] and C.M. and Orszag [169], pp. 375-376.

Given a list `seq` of the first N elements of a slowly convergent infinite sequence, `richardson()` computes the N-term Richardson extrapolate for the limit.

`richardson()` returns (v, c) where v is the estimated limit and c is the magnitude of the largest weight used during the computation. The weight provides an estimate of the precision lost to cancellation. Due to cancellation effects, the sequence must be typically be computed at a much higher precision than the target accuracy of the extrapolation.

Applicability and issues

Richardson extrapolation only works for a specific type of sequence, namely one converging like partial sums of $P(1)/Q(1) + P(2)/Q(2) + \ldots$ where P and Q are polynomials. When the sequence does not convergence at such a rate `richardson()` generally produces garbage.

Richardson extrapolation has the advantage of being fast: the N-term extrapolate requires only $O(N)$ arithmetic operations, and usually produces an estimate that is accurate to $O(N)$ digits. Contrast with the Shanks transformation (see `shanks()`), which requires $O(N^2)$ operations.

`richardson()` is unable to produce an estimate for the approximation error. One way to estimate the error is to perform two extrapolations with slightly different N and comparing the results.

Richardson extrapolation does not work for oscillating sequences. As a simple workaround, `richardson()` detects if the last three elements do not differ monotonically, and in that case applies extrapolation only to the even-index elements.

Examples

Applying Richardson extrapolation to the Leibniz series for π:

```
>>> from xlcalcnet import *
>>> mp.dps = 30; mp.pretty = True
>>> S = [4*sum(mpf(-1)**n/(2*n+1) for n in range(m))
...     for m in range(1,30)]
>>> v, c = richardson(S[:10])
>>> v
3.2126984126984126984126984127
>>> nprint([v-pi, c])
[0.0711058, 2.0]

>>> v, c = richardson(S[:30])
>>> v
3.1415926546862405282995420622 6
>>> nprint([v-pi, c])
[1.09645e-9, 20833.3]
```

5.13.7 Shanks extrapolation

`ctx.shanks`(*seq*, *table=None*, *randomized=False*)

where `ctx` is `dec`, `mpm`, or `gmp`.

See also: Wikipedia [1113], MathWorld [810].

Given a list `seq` of the first N elements of a slowly convergent infinite sequence (A_k), `shanks()` computes the iterated Shanks transformation $S(A), S(S(A)), \ldots, S^{N/2}(A)$. The Shanks transformation often provides strong convergence acceleration, especially if the sequence is oscillating.

The iterated Shanks transformation is computed using the Wynn epsilon algorithm (see [1]). `shanks()` returns the full epsilon table generated by Wynn's algorithm, which can be read off as follows:

- The table is a list of lists forming a lower triangular matrix, where higher row and column indices correspond to more accurate values.
- The columns with even index hold dummy entries (required for the computation) and the columns with odd index hold the actual extrapolates.
- The last element in the last row is typically the most accurate estimate of the limit.
- The difference to the third last element in the last row provides an estimate of the approximation error.
- The magnitude of the second last element provides an estimate of the numerical accuracy lost to cancellation.

For convenience, so the extrapolation is stopped at an odd index so that `shanks(seq)[-1][-1]` always gives an estimate of the limit.

Optionally, an existing table can be passed to `shanks()`. This can be used to efficiently extend a previous computation after new elements have been appended to the sequence. The table will then be updated in-place.

The Shanks transformation

The Shanks transformation is defined as follows (see C.M. and Orszag [169], pp. 368-375): given the input sequence $(A_0, A_1, \ldots)$, the transformed sequence is given by

$$S(A_k) = \frac{A_{k+1}A_{k-1} - A_k^2}{A_{k+1} + A_{k-1} - 2A_k}$$

The Shanks transformation gives the exact limit A_∞ in a single step if $A_k = A + aq^k$. Note in particular that it extrapolates the exact sum of a geometric series in a single step.

Applying the Shanks transformation once often improves convergence substantially for an arbitrary sequence, but the optimal effect is obtained by applying it iteratively: $S(S(A_k)), S(S(S(A_k))), \ldots$.

Wynn's epsilon algorithm provides an efficient way to generate the table of iterated Shanks transformations. It reduces the computation of each element to essentially a single division, at the cost of requiring dummy elements in the table. See Graves-Morris *et al.* [350] for details.

Precision issues

Due to cancellation effects, the sequence must be typically be computed at a much higher precision than the target accuracy of the extrapolation.

If the Shanks transformation converges to the exact limit (such as if the sequence is a geometric series), then a division by zero occurs. By default, `shanks()` handles this case by terminating the iteration and returning the table it has generated so far. With *randomized=True*, it will instead replace the zero by a pseudorandom number close to zero. (TODO: find a better solution to this problem.)

Examples

We illustrate by applying Shanks transformation to the Leibniz series for π:

```
>>> from xlcalcnet import *
>>> mp.dps = 50
>>> S = [4*sum(mpf(-1)**n/(2*n+1) for n in range(m))
...     for m in range(1,30)]
>>>
>>> T = shanks(S[:7])
>>> for row in T:
...     nprint(row)
...
[-0.75]
[1.25, 3.16667]
[-1.75, 3.13333, -28.75]
[2.25, 3.14524, 82.25, 3.14234]
[-2.75, 3.13968, -177.75, 3.14139, -969.937]
[3.25, 3.14271, 327.25, 3.14166, 3515.06, 3.14161]
```

The extrapolated accuracy is about 4 digits, and about 4 digits may have been lost due to cancellation:

```
>>> L = T[-1]
>>> nprint([abs(L[-1] - pi), abs(L[-1] - L[-3]), abs(L[-2])])
[2.22532e-5, 4.78309e-5, 3515.06]
```

Now we extend the computation:

```
>>> T = shanks(S[:25], T)
>>> L = T[-1]
>>> nprint([abs(L[-1] - pi), abs(L[-1] - L[-3]), abs(L[-2])])
[3.75527e-19, 1.48478e-19, 2.96014e+17]
```

The value for pi is now accurate to 18 digits. About 18 digits may also have been lost to cancellation.

Here is an example with a geometric series, where the convergence is immediate (the sum is exactly 1):

```
>>> mp.dps = 15
>>> for row in shanks([0.5, 0.75, 0.875, 0.9375, 0.96875]):
...     nprint(row)
[4.0]
[8.0, 1.0]
```

5.13.8 Levin extrapolation

`ctx.levin`(*seq*, *table=None*, *randomized=False*)

where `ctx` is `dec`, `mpm`, or `gmp`.

This interface implements Levin's (nonlinear) sequence transformation for convergence acceleration and summation of divergent series. It performs better than the Shanks/Wynn-epsilon algorithm for logarithmic convergent or alternating divergent series.

See also: Weniger [1073], Sidi [498], Homeier [372].

Let *A* be the series we want to sum:

$$A = \sum_{k=0}^{\infty} a_k$$

Attention: all a_k must be non-zero!

Let s_n be the partial sums of this series:

$$s_n = \sum_{k=0}^{n} a_k.$$

Methods

Calling `levin` returns an object with the following methods.

`update(...)` works with the list of individual terms a_k of *A*, and `update_step(...)` works with the list of partial sums s_k of *A*:

```
v, e = ...update([a_0, a_1,..., a_k])
v, e = ...update_psum([s_0, s_1,..., s_k])
```

`step(...)` works with the individual terms a_k and `step_psum(...)` works with the partial sums s_k:

```
v, e = ...step(a_k)
v, e = ...step_psum(s_k)
```

v is the current estimate for A, and e is an error estimate which is simply the difference between the current estimate and the last estimate. One should not mix `update`, `update_psum`, `step` and `step_psum`.

A word of caution

One can only hope for good results (i.e. convergence acceleration or resummation) if the s_n have some well defind asymptotic behavior for large n and are not erratic or random. Furthermore one usually needs very high working precision because of the numerical cancellation. If the working precision is insufficient, levin may produce silently numerical garbage. Furthermore even if the Levin-transformation converges, in the general case there is no proof that the result is mathematically sound. Only for very special classes of problems one can prove that the Levin-transformation converges to the expected result (for example Stieltjes-type integrals). Furthermore the Levin-transform is quite expensive (i.e. slow) in comparison to Shanks/Wynn-epsilon, Richardson & co. In summary one can say that the Levin-transformation is powerful but unreliable and that it may need a copious amount of working precision.

The Levin transform has several variants differing in the choice of weights. Some variants are better suited for the possible flavours of convergence behaviour of A than other variants:

```
convergence behaviour   levin-u   levin-t   levin-v   shanks/wynn-epsilon

logarithmic               +         -         +          -
linear                    +         +         +          +
alternating divergent     +         +         +          +

    "+" means the variant is suitable,"-" means the variant is not suitable;
    for comparison the Shanks/Wynn-epsilon transform is listed, too.
```

The variant is controlled though the variant keyword (i.e. `variant="u"`, `variant="t"` or `variant="v"`). Overall "u" is probably the best choice.

Finally it is possible to use the Sidi-S transform instead of the Levin transform by using the keyword `method='sidi'`. The Sidi-S transform works better than the Levin transformation for some divergent series (see the examples).

Parameters:

```
method      "levin" or "sidi" chooses either the Levin or the Sidi-S transformation
variant     "u","t" or "v" chooses the weight variant.
```

The Levin transform is also accessible through the nsum interface. `method="l"` or `method="levin"` select the normal Levin transform while `method="sidi"` selects the Sidi-S transform. The variant is in both cases selected through the levin_variant keyword. The stepsize in `nsum()` must not be chosen too large, otherwise it will miss the point where the Levin transform converges resulting in numerical overflow/garbage. For highly divergent series a copious amount of working precision must be chosen.

Examples

First we sum the zeta function:

```
>>> from mpmath import mp
>>> mp.prec = 53
>>> eps = mp.mpf(mp.eps)
>>> with mp.extraprec(2 * mp.prec): # levin needs a high working precision
...     L = mp.levin(method = "levin", variant = "u")
...     S, s, n = [], 0, 1
...     while 1:
...         s += mp.one / (n * n)
...         n += 1
...         S.append(s)
...         v, e = L.update_psum(S)
...         if e < eps:
...             break
...         if n > 1000: raise RuntimeError("iteration limit exceeded")
>>> print(mp.chop(v - mp.pi ** 2 / 6))
0.0
```

(continues on next page)

(continued from previous page)

```
>>> w = mp.nsum(lambda n: 1 / (n*n), [1, mp.inf], method = "levin", levin_variant = "u")
>>> print(mp.chop(v - w))
0.0
```

Now we sum the zeta function outside its range of convergence (attention: This does not work at the negative integers!):

```
>>> eps = mp.mpf(mp.eps)
>>> with mp.extraprec(2 * mp.prec): # levin needs a high working precision
...     L = mp.levin(method = "levin", variant = "v")
...     A, n = [], 1
...     while 1:
...         s = mp.mpf(n) ** (2 + 3j)
...         n += 1
...         A.append(s)
...         v, e = L.update(A)
...         if e < eps:
...             break
...         if n > 1000: raise RuntimeError("iteration limit exceeded")
>>> print(mp.chop(v - mp.zeta(-2-3j)))
0.0
>>> w = mp.nsum(lambda n: n ** (2 + 3j), [1, mp.inf], method = "levin", levin_variant = "v")
>>> print(mp.chop(v - w))
0.0
```

Now we sum the divergent asymptotic expansion of an integral related to the exponential integral (see also Sidi [498] p.373). The Sidi-S transform works best here:

```
>>> z = mp.mpf(10)
>>> exact = mp.quad(lambda x: mp.exp(-x)/(1+x/z),[0,mp.inf])
>>> # exact = z * mp.exp(z) * mp.expint(1,z) # this is the symbolic expression for the integral
>>> eps = mp.mpf(mp.eps)
>>> with mp.extraprec(2 * mp.prec): # high working precisions are mandatory for divergent resummation
...     L = mp.levin(method = "sidi", variant = "t")
...     n = 0
...     while 1:
...         s = (-1)**n * mp.fac(n) * z ** (-n)
...         v, e = L.step(s)
...         n += 1
...         if e < eps:
...             break
...         if n > 1000: raise RuntimeError("iteration limit exceeded")
>>> print(mp.chop(v - exact))
0.0
>>> w = mp.nsum(lambda n: (-1) ** n * mp.fac(n) * z ** (-n), [0, mp.inf], \
...   method = "sidi", levin_variant = "t")
>>> print(mp.chop(v - w))
0.0
```

Another highly divergent integral is also summable:

```
>>> z = mp.mpf(2)
>>> eps = mp.mpf(mp.eps)
>>> exact = mp.quad(lambda x: mp.exp( -x * x / 2 - z * x ** 4), [0,mp.inf]) * 2 / mp.sqrt(2 * mp.pi)
>>> # exact = mp.exp(mp.one / (32 * z)) * mp.besselk(mp.one / 4, mp.one / (32 * z))
>>> # / (4 * mp.sqrt(z * mp.pi)) # this is the symbolic expression for the integral
>>> with mp.extraprec(7 * mp.prec):
>>> # we need copious amount of precision to sum this highly divergent series
...     L = mp.levin(method = "levin", variant = "t")
...     n, s = 0, 0
...     while 1:
...         s += (-z)**n * mp.fac(4 * n) / (mp.fac(n) * mp.fac(2 * n) * (4 ** n))
...         n += 1
...         v, e = L.step_psum(s)
...         if e < eps:
```

(continues on next page)

(continued from previous page)

```
...             break
...         if n > 1000: raise RuntimeError("iteration limit exceeded")
>>> print(mp.chop(v - exact))
0.0
>>> w = mp.nsum(lambda n: (-z)**n * mp.fac(4 * n) / (mp.fac(n) * mp.fac(2 * n) * (4 ** n)),
...   [0, mp.inf], method = "levin", levin_variant = "t", workprec = 8*mp.prec, \
...   steps = [2] + [1 for x in xrange(1000)])
>>> print(mp.chop(v - w))
0.0
```

These examples run with 15-20 decimal digits precision. For higher precision the working precision must be raised.

Examples for nsum

Here we calculate Euler's constant as the constant term in the Laurent expansion of $\zeta(s)$ at $s = 1$. This sum converges extremly slowly because of the logarithmic convergence behaviour of the Dirichlet series for zeta:

```
>>> mp.dps = 30
>>> z = mp.mpf(10) ** (-10)
>>> a = mp.nsum(lambda n: n**(-(1+z)), [1, mp.inf], method = "l") - 1 / z
>>> print(mp.chop(a - mp.euler, tol = 1e-10))
0.0
```

The Sidi-S transform performs excellently for the alternating series of $\log(2)$:

```
>>> a = mp.nsum(lambda n: (-1)**(n-1) / n, [1, mp.inf], method = "sidi")
>>> print(mp.chop(a - mp.log(2)))
0.0
```

Hypergeometric series can also be summed outside their range of convergence. The stepsize in `nsum()` must not be chosen too large, otherwise it will miss the point where the Levin transform converges resulting in numerical overflow/garbage:

```
>>> z = 2 + 1j
>>> exact = mp.hyp2f1(2 / mp.mpf(3), 4 / mp.mpf(3), 1 / mp.mpf(3), z)
>>> f = lambda n: mp.rf(2 / mp.mpf(3), n) * mp.rf(4 / mp.mpf(3), n) * z**n \
...   / (mp.rf(1 / mp.mpf(3), n) * mp.fac(n))
>>> v = mp.nsum(f, [0, mp.inf], method = "levin", steps = [10 for x in xrange(1000)])
>>> print(mp.chop(exact-v))
0.0
```

5.13.9 Cohan alternating extrapolation

`ctx.cohen_alt`(*seq*, *table=None*, *randomized=False*)

where `ctx` is `dec`, `mpm`, or `gmp`.

This interface implements the convergence acceleration of alternating series as described in Cohen *et al.* [182].

This series transformation works only well if the individual terms of the series have an alternating sign. It belongs to the class of linear series transformations (in contrast to the Shanks/Wynn-epsilon or Levin transform). This series transformation is also able to sum some types of divergent series. See the paper under which conditions this resummation is mathematical sound.

Let A be the series we want to sum:

$$A = \sum_{k=0}^{\infty} a_k$$

Let s_n be the partial sums of this series:

$$s_n = \sum_{k=0}^{n} a_k.$$

Interface

Calling `cohen_alt` returns an object with the following methods.

Then `update(...)` works with the list of individual terms a_k and `update_psum(...)` works with the list of partial sums s_k:

```
v, e = ...update([a_0, a_1,..., a_k])
v, e = ...update_psum([s_0, s_1,..., s_k])
```

v is the current estimate for A, and e is an error estimate which is simply the difference between the current estimate and the last estimate.

Examples

Here we compute the alternating zeta function using `update_psum`:

```
>>> from mpmath import mp
>>> AC = mp.cohen_alt()
>>> S, s, n = [], 0, 1
>>> while 1:
...     s += -((-1) ** n) * mp.one / (n * n)
...     n += 1
...     S.append(s)
...     v, e = AC.update_psum(S)
...     if e < mp.eps:
...         break
...     if n > 1000: raise RuntimeError("iteration limit exceeded")
>>> print(mp.chop(v - mp.pi ** 2 / 12))
0.0
```

Here we compute the product $\prod_{n=1}^{\infty} \Gamma(1+1/(2n-1))/\Gamma(1+1/(2n))$:

```
>>> A = []
>>> AC = mp.cohen_alt()
>>> n = 1
>>> while 1:
...     A.append( mp.loggamma(1 + mp.one / (2 * n - 1)))
...     A.append(-mp.loggamma(1 + mp.one / (2 * n)))
...     n += 1
...     v, e = AC.update(A)
...     if e < mp.eps:
...         break
...     if n > 1000: raise RuntimeError("iteration limit exceeded")
>>> v = mp.exp(v)
>>> print(mp.chop(v - 1.06215090557106, tol = 1e-12))
0.0
```

`cohen_alt` is also accessible through the `nsum()` interface:

```
>>> v = mp.nsum(lambda n: (-1)**(n-1) / n, [1, mp.inf], method = "a")
>>> print(mp.chop(v - mp.log(2)))
0.0
>>> v = mp.nsum(lambda n: (-1)**n / (2 * n + 1), [0, mp.inf], method = "a")
>>> print(mp.chop(v - mp.pi / 4))
0.0
>>> v = mp.nsum(lambda n: (-1)**n * mp.log(n) * n, [1, mp.inf], method = "a")
>>> print(mp.chop(v - mp.diff(lambda s: mp.altzeta(s), -1)))
0.0
```

5.14 Mpmath: Polynomials

Python code for `gmp` and `dec` is available in `Test_Python.numpy.py`.

5.14.1 Polynomial evaluation

`ctx.polyval`(*coeffs*, *x*, *derivative=False*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Given coefficients $[c_n, \ldots, c_2, c_1, c_0]$ and a number x, `polyval()` evaluates the polynomial

$$P(x) = c_n x^n + \ldots + c_2 x^2 + c_1 x + c_0.$$

If *derivative=True* is set, `polyval()` simultaneously evaluates $P(x)$ with the derivative, $P'(x)$, and returns the tuple $(P(x), P'(x))$.

```
>>> from xlcalcnet import *
>>> mp.pretty = True
>>> polyval([3, 0, 2], 0.5)
2.75
>>> polyval([3, 0, 2], 0.5, derivative=True)
(2.75, 3.0)
```

The coefficients and the evaluation point may be any combination of real or complex numbers.

5.14.2 Polynomial roots

`ctx.polyroots`(*coeffs*, *maxsteps=50*, *cleanup=True*, *extraprec=10*, *error=False*, *roots_init=None*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Computes all roots (real or complex) of a given polynomial.

The roots are returned as a sorted list, where real roots appear first followed by complex conjugate roots as adjacent elements. The polynomial should be given as a list of coefficients, in the format used by `polyval()`. The leading coefficient must be nonzero.

With *error=True*, `polyroots()` returns a tuple *(roots, err)* where *err* is an estimate of the maximum error among the computed roots.

Examples

Finding the three real roots of $x^3 - x^2 - 14x + 24$:

```
>>> from xlcalcnet import *
>>> mp.dps = 15; mp.pretty = True
>>> nprint(polyroots([1,-1,-14,24]), 4)
[-4.0, 2.0, 3.0]
```

Finding the two complex conjugate roots of $4x^2 + 3x + 2$, with an error estimate:

```
>>> roots, err = polyroots([4,3,2], error=True)
>>> for r in roots:
...     print(r)
...
(-0.375 + 0.599478940414 09j)
(-0.375 - 0.599478940414 09j)
>>>
>>> err
2.22044604925031e-16
>>>
>>> polyval([4,3,2], roots[0])
(2.22044604925031e-16 + 0.0j)
>>> polyval([4,3,2], roots[1])
(2.22044604925031e-16 + 0.0j)
```

The following example computes all the 5th roots of unity; that is, the roots of $x^5 - 1$:

```
>>> mp.dps = 20
>>> for r in polyroots([1, 0, 0, 0, 0, -1]):
...     print(r)
...
1.0
(-0.8090169943749474241 + 0.58778525229247312917j)
(-0.8090169943749474241 - 0.58778525229247312917j)
(0.3090169943749474241 + 0.95105651629515357212j)
(0.3090169943749474241 - 0.95105651629515357212j)
```

Precision and conditioning

The roots are computed to the current working precision accuracy. If this accuracy cannot be achieved in `maxsteps` steps, then a `NoConvergence` exception is raised. The algorithm internally is using the current working precision extended by `extraprec`. If `NoConvergence` was raised, that is caused either by not having enough extra precision to achieve convergence (in which case increasing `extraprec` should fix the problem) or too low `maxsteps` (in which case increasing `maxsteps` should fix the problem), or a combination of both.

The user should always do a convergence study with regards to `extraprec` to ensure accurate results. It is possible to get convergence to a wrong answer with too low `extraprec`.

Provided there are no repeated roots, `polyroots()` can typically compute all roots of an arbitrary polynomial to high precision:

```
>>> mp.dps = 60
>>> for r in polyroots([1, 0, -10, 0, 1]):
...     print(r)
...
-3.14626436994197234232913506571557044551247712918732870123249
-0.31783724519578224472575761729617428837313337843343255487912 7
0.31783724519578224472575761729617428837313337843343255487912 7
3.14626436994197234232913506571557044551247712918732870123249
>>>
>>> sqrt(3) + sqrt(2)
3.14626436994197234232913506571557044551247712918732870123249
>>> sqrt(3) - sqrt(2)
0.31783724519578224472575761729617428837313337843343255487912 7
```

Algorithm

`polyroots()` implements the Durand-Kerner method (see Wikipedia [1084]), which uses complex arithmetic to locate all roots simultaneously. The Durand-Kerner method can be viewed as approximately performing simultaneous Newton iteration for all the roots. In particular, the convergence to simple roots is quadratic, just like Newton's method.

Although all roots are internally calculated using complex arithmetic, any root found to have an imaginary part smaller than the estimated numerical error is truncated to a real number (small real parts are also chopped). Real roots are placed first in the returned list, sorted by value. The remaining complex roots are sorted by their real parts so that conjugate roots end up next to each other.

5.15 Eigen/MinPack: non linear optimization

5.15.1 Multidimensional Rootfinding: Powell Hybrid

`ctxboost.`**`PowellHybrid`**(*f*, *fjac*, *guess*)

This is a modified version of Powell's Hybrid method as implemented in the hybrj algorithm in minpack. The Hybrid algorithm retains the fast convergence of Newton's method but will also reduce the residual when Newton's method is unreliable. The algorithm uses a generalized trust region to keep each step under control.

See also: Moré *et al.* [415], Eigen [216], Wikipedia [1426], Powell [471].

Parameters:

f
a callback matrix function defining the system.

fjac
a callback matrix function defining the Jacobian of the system system.

guess
a matrix containing the initial guess for the solution

Results:

x1
a matrix containing the solution.

Example:

This is an example from the original manual of MINPACK (Moré *et al.* [415]).

The routine in Python:

```
def demo_PowellHybridCtx(ctx):

    # The function to optimize
    def XmatHybrd(x, fvec):
        n = x.size
        for k in range(n):
            temp = (3.0 - 2.0 * x[k]) * x[k]
            temp1 = ctx.zero()
            if (k!=0): temp1 = x[k-1]
            temp2 = ctx.zero()
            if (k != n-1): temp2 = x[k+1]
            fvec[k] = temp - temp1 - 2.0*temp2 + 1.0

    # The Jacobi function
    def XmatHybrdJ(x, fjac):
        n = x.size
        for k in range(n):
            for j in range(n):
                fjac[k, j] = ctx.zero()
            fjac[k, k] = 3.0 - 4.0 * x[k]
            if (k != 0): fjac[k, k - 1] = -1
            if (k != n - 1): fjac[k, k + 1] = -2

    # This defines the start vector
    n = 9
    matInput = ctx.matZeros(n,1)
    matInput[0] = 1
    matInput[1] = 2  # entries 2 .. 8 are 0.
    print('matInput: \n', matInput)

    # This executes the PowellHybrd solver
    matRes = ctx.powellHybrd(XmatHybrd, XmatHybrdJ, matInput)
```

(continues on next page)

(continued from previous page)

```
    # Check the result
    Y = ctx.matZeros(n,1)
    XmatHybrd(matRes, Y)
    print('matRes: \n', matRes)
    print('Y: \n', Y)
```

The output of these routines:

```
Hello DemoPowellHybrdClassDbl()

X (solution):
-0.570654511600659,
-0.681628342291231,
-0.701732452563471,
-0.704212940083752,
-0.701369047627289,
-0.691865643379914,
-0.665792012154689,
-0.596034201280817,
-0.416412062998472,

matEval =  F(X=solution):
6.56011067690088E-09,
-4.17547307840493E-09,
-5.19316567526573E-09,
-2.39601338769546E-09,
2.02249372804886E-09,
4.81791939677123E-09,
2.57950016901987E-09,
-3.88373844195655E-09,
-1.35886191188206E-10,
```

5.15.2 Nonlinear LeastSquares: Levenberg-Marquardt

`ctxboost.`**Levenberg**(*f*, *fjac*, *matInput*)

This is a robust and efficient version of the Levenberg-Marquardt algorithm as implemented in the scaled lmder routine in minpack. The algorithm uses a generalized trust region to keep each step under control.

See also: Moré *et al.* [415], Eigen [216], Wikipedia [1420].

Parameters:

f
a callback matrix function defining the system.

fjac
a callback matrix function defining the Jacobian of the system system.

guess
a matrix containing the initial guess for the solution

Results:

x1
a matrix containing the solution.

Example:

This is an example from the original manual of MINPACK (Moré *et al.* [415]).

The routine in Python:

```
def demo_LevenbergCtx(ctx):

    # The function to optimize
    def XmatLM(x, fvec):
        m = 15
        y = ctx.matZeros(m,1)
        y[0] = 1.4e-1
        y[1] = 1.8e-1
        y[2] = 2.2e-1
        y[3] = 2.5e-1
        y[4] = 2.9e-1
        y[5] = 3.2e-1
        y[6] = 3.5e-1
        y[7] = 3.9e-1
        y[8] = 3.7e-1
        y[9] = 5.8e-1
        y[10] = 7.3e-1
        y[11] = 9.6e-1
        y[12] = 1.34e0
        y[13] = 2.1e0
        y[14] = 4.39e0
        for i in range(m):
            tmp1 = i + 1
            tmp2 = m - i
            tmp3 = tmp1
            if (i >= 8): tmp3 = tmp2
            fvec[i] = y[i] - (x[0] + tmp1/(x[1]*tmp2 + x[2]*tmp3))

    # The Jacobi function
    def XmatLMJ(x, fjac):
        m = 15
        for i in range(m):
            tmp1 = i + 1
            tmp2 = m - i
            tmp3 = tmp1
            if (i >= 8): tmp3 = tmp2
```

(continues on next page)

(continued from previous page)

```
            tmp4 = (x[1] * tmp2 + x[2] * tmp3)
            tmp4 = tmp4 * tmp4
            fjac[i, 0] = -1
            fjac[i, 1] = tmp1 * tmp2 / tmp4
            fjac[i, 2] = tmp1 * tmp3 / tmp4

    # This defines the start vector
    n = 3; m = 15
    matInput = ctx.matZeros(n,1)
    matInput[0] = 1
    matInput[1] = 2  # entries 2 .. 8 are 0.
    print('matInput: \n', matInput)
    # This executes the Levenberg solver
    matRes = ctx.levenberg(XmatLM, XmatLMJ, matInput)
    # Check the result
    Y = ctx.matZeros(m,1)
    XmatLM(matRes, Y)
    print('matRes: \n', matRes)
    print('Y: \n', Y)
```

This produces the following output:

```
Hello DemoLevenbergClassDbl()

X (solution):
0.0824105765758334,
1.1330366534715,
2.34369463894115,

matEval =  F(X=solution):
0.00588109515673704,
0.000265360346254795,
-0.000274673051589042,
-0.00654152299741256,
0.000823003778696318,
0.00129950005693674,
0.00446310734534455,
0.0199629386905548,
-0.0822160569476201,
0.0182119488681469,
0.0148111570102206,
0.0147099692233311,
0.0112079895785155,
0.00420403028888439,
-0.00680784758001085,
```

5.16 Eigen/CppOptLib: multidimensional optimization

The Homepage is https://github.com/PatWie/CppNumericalSolvers.

To use another solver, simply replace BfgsSolver by another name. Supported solvers are:

gradient descent solver (GradientDescentSolver)

conjugate gradient descent solver (ConjugatedGradientDescentSolver)

BFGS solver (BfgsSolver)

L-BFGS solver (LbfgsSolver) bfgsbSolver)

CMAes solver (CMAesSolver)

Nelder-Mead solver (NelderMeadSolver)

These solvers are tested on the Rosenbrock function from multiple difficult starting points by unit tests using the Google Testing Framework. And yes, you can use them directly in MATLAB. Additional benchmark functions are Beale, GoldsteinPrice, Booth, Matyas, Levi. Note, not all solvers are equivalently good at all problems.

For checking your gradient this library uses high-order central difference. Study the examples for more information about including box-constraints and gradient-information.

5.16.1 Nelder-Mead Solver

ctxboost.**NelderMead**(*f*, *fjac*, *matInput*)

The Nelder-Mead method (or downhill simplex method) is a commonly applied numerical method used to find the minimum or maximum of an objective function in a multidimensional space.

See also: Wieschollek [1076], Wikipedia [1425].

Parameters:

f
a callback matrix function defining the system.

fjac
a callback matrix function defining the Jacobian of the system system.

guess
a matrix containing the initial guess for the solution

Results:

x1
a matrix containing the solution.

Example:

The routine in Python:

```
def demo_NelderMeadCtx(ctx):

    # The function to optimize
    def matF1(X, Y):
        t1 = 1 - X[0]
        t2 = X[1] - X[0] * X[0]
        Y[0] = t1 * t1 + 100 * t2 * t2

    # The Jacobi function
    def matF2(X, Y):
        Y[0] = -2 * (1 - X[0]) + 200 * (X[1] - X[0] * X[0]) * (-2 * X[0])
        Y[1] = 200 * (X[1] - X[0] * X[0])

    # This defines the start vector
    r = 2
    c = 1
    X = ctx.matZeros(r,c)
    X[0] = 1
    X[1] = 2
    print('X: \n', X)

    # This executes the NelderMead solver
    matRes = ctx.nelderMeadSolver(matF1, matF2, X)

    # Check the result
    Y = ctx.matZeros(r,c)
    matF1(matRes, Y)
    print('matRes: \n', matRes)
    print('Y: \n', Y)
    nrm = ctx.sqrt( Y[0]*Y[0] + Y[1]*Y[1]) # result is correct
    print('Norm: \n', nrm)
```

This produces the following output:

```
Hello DemoNelderMeadSolverDbl()
matRes:
    1.000014;
```

(continues on next page)

(continued from previous page)

```
    1.000029;

Y = F(matRes):
    0.000000;
    0.000000;

Norm: 2.96378497762668E-10
```

5.16.2 CMAes solver

`ctxboost.CMAes`(*f*, *fjac*, *matInput*)

CMA-ES stands for covariance matrix adaptation evolution strategy. Evolution strategies (ES) are stochastic, derivative-free methods for numerical optimization of non-linear or non-convex continuous optimization problems.

See also: Wieschollek [1076], Wikipedia [1416].

Parameters:

f
a callback matrix function defining the system.

fjac
a callback matrix function defining the Jacobian of the system system.

guess
a matrix containing the initial guess for the solution

Results:

x1
a matrix containing the solution.

Example:

The routine in Python:

```
def demo_CMAesCtx(ctx):

    # The function to optimize
    def matF1(X, Y):
        t1 = 1 - X[0]
        t2 = X[1] - X[0] * X[0]
        Y[0] = t1 * t1 + 100 * t2 * t2

    # The Jacobi function
    def matF2(X, Y):
        Y[0] = -2 * (1 - X[0]) + 200 * (X[1] - X[0] * X[0]) * (-2 * X[0])
        Y[1] = 200 * (X[1] - X[0] * X[0])

    # This defines the start vector
    r = 2
    c = 1
    X = ctx.matZeros(r,c)
    X[0] = 1
    X[1] = 2
    print('X: \n', X)

    # This executes the CMAes solver
    matRes = ctx.cMAesSolver(matF1, matF2, X)

    # Check the result
    Y = ctx.matZeros(r,c)
    matF1(matRes, Y)
    print('matRes: \n', matRes)
    print('Y: \n', Y)
    nrm = ctx.sqrt( Y[0]*Y[0] + Y[1]*Y[1]) # result is correct
    print('Norm: \n', nrm)
```

This produces the following output:

```
Hello DemoCMAesSolverDbl()
matRes:
    0.999140;
```

(continues on next page)

(continued from previous page)

```
    0.998260;

Y = F(matRes):
    0.000001;
    0.000000;

Norm: 7.83903245823684E-07
```

5.16.3 BFGS Solver

`ctxboost.BFGS`(*f*, *fjac*, *matInput*)

The Broyden-Fletcher-Goldfarb-Shanno (BFGS) algorithm is an iterative method for solving unconstrained nonlinear optimization problems.

See also: Wieschollek [1076], Wikipedia [1415].

Parameters:

f
a callback matrix function defining the system.

fjac
a callback matrix function defining the Jacobian of the system system.

guess
a matrix containing the initial guess for the solution

Results:

x1
a matrix containing the solution.

Example:

The routine in Python:

```
def demo_BfgsCtx(ctx):

    # The function to optimize
    def matF1(X, Y):
        t1 = 1 - X[0]
        t2 = X[1] - X[0] * X[0]
        Y[0] = t1 * t1 + 100 * t2 * t2

    # The Jacobi function
    def matF2(X, Y):
        Y[0] = -2 * (1 - X[0]) + 200 * (X[1] - X[0] * X[0]) * (-2 * X[0])
        Y[1] = 200 * (X[1] - X[0] * X[0])

    # This defines the start vector
    r = 2
    c = 1
    X = ctx.matZeros(r,c)
    X[0] = 1
    X[1] = 2
    print('X: \n', X)

    # This executes the Bfgs solver
    matRes = ctx.bfgsSolver(matF1, matF2, X)

    # Check the result
    Y = ctx.matZeros(r,c)
    matF1(matRes, Y)
    print('matRes: \n', matRes)
    print('Y: \n', Y)
    nrm = ctx.sqrt( Y[0]*Y[0] + Y[1]*Y[1]) # result is correct
    print('Norm: \n', nrm)
```

This produces the following output:

```
Hello DemoBfgsSolverClassDbl()
matRes:
0.999999951430365,
```

(continues on next page)

(continued from previous page)

```
0.999999899650162,

Y = F(matRes):
3.389785983959666E-15,
0,

Norm: 3.389785983959666E-15
```

5.16.4 L-BFGS Solver

ctxboost.**LBFGS**(*f*, *fjac*, *matInput*)

Limited-memory BFGS (L-BFGS or LM-BFGS) is an optimization algorithm in the family of quasi-Newton methods that approximates the Broyden-Fletcher-Goldfarb-Shanno algorithm (BFGS) using a limited amount of computer memory.

See also: Wieschollek [1076], Wikipedia [1421].

Parameters:

f
a callback matrix function defining the system.

fjac
a callback matrix function defining the Jacobian of the system system.

guess
a matrix containing the initial guess for the solution

Results:

x1
a matrix containing the solution.

Example:

The routine in Python:

```
def demo_LBfgsCtx(ctx):

    # The function to optimize
    def matF1(X, Y):
        t1 = 1 - X[0]
        t2 = X[1] - X[0] * X[0]
        Y[0] = t1 * t1 + 100 * t2 * t2

    # The Jacobi function
    def matF2(X, Y):
        Y[0] = -2 * (1 - X[0]) + 200 * (X[1] - X[0] * X[0]) * (-2 * X[0])
        Y[1] = 200 * (X[1] - X[0] * X[0])

    # This defines the start vector
    r = 2
    c = 1
    X = ctx.matZeros(r,c)
    X[0] = 1
    X[1] = 2
    print('X: \n', X)

    # This executes the LBfgs solver
    matRes = ctx.lbfgsBSolver(matF1, matF2, X)

    # Check the result
    Y = ctx.matZeros(r,c)
    matF1(matRes, Y)
    print('matRes: \n', matRes)
    print('Y: \n', Y)
    nrm = ctx.sqrt( Y[0]*Y[0] + Y[1]*Y[1]) # result is correct
    print('Norm: \n', nrm)
```

This produces the following output:

```
Hello DemoLbfgsSolverDbl()
matRes:
    1.000000;
```

(continues on next page)

(continued from previous page)

```
    1.000000;

Y = F(matRes):
    0.000000;
    0.000000;

Norm: 7.41089272169439E-14
```

5.16.5 Gradient descent solver

ctxboost.**GradientDescent**(*f*, *fjac*, *matInput*)

Gradient descent is a first-order iterative optimization algorithm for finding a local minimum of a differentiable function.

See also: Wieschollek [1076], Wikipedia [1415]. and https://en.wikipedia.org/wiki/Gradient_descent.

Parameters:

f
a callback matrix function defining the system.

fjac
a callback matrix function defining the Jacobian of the system system.

guess
a matrix containing the initial guess for the solution

Results:

x1
a matrix containing the solution.

Example:

The routine in Python:

```
def demo_GradientDescentCtx(ctx):

    # The function to optimize
    def matF1(X, Y):
        t1 = 1 - X[0]
        t2 = X[1] - X[0] * X[0]
        Y[0] = t1 * t1 + 100 * t2 * t2

    # The Jacobi function
    def matF2(X, Y):
        Y[0] = -2 * (1 - X[0]) + 200 * (X[1] - X[0] * X[0]) * (-2 * X[0])
        Y[1] = 200 * (X[1] - X[0] * X[0])

    # This defines the start vector
    r = 2
    c = 1
    X = ctx.matZeros(r,c)
    X[0] = 1
    X[1] = 2
    print('X: \n', X)

    # This executes the GradientDescentSolver solver
    matRes = ctx.gradientDescentSolver(matF1, matF2, X)

    # Check the result
    Y = ctx.matZeros(r,c)
    matF1(matRes, Y)
    print('matRes: \n', matRes)
    print('Y: \n', Y)
    nrm = ctx.sqrt( Y[0]*Y[0] + Y[1]*Y[1]) # result is correct
    print('Norm: \n', nrm)
```

This produces the following output:

```
Hello DemoBfgsSolverClassDbl()
matRes:
0.999999951430365,
0.999999899650162,
```

(continues on next page)

(continued from previous page)

```
Y = F(matRes):
3.38978598395966E-15,
0,

Norm: 3.38978598395966E-15
```

5.16.6 Conjugate gradient descent solver

`ctxboost.ConjugateGradientDescent`(*f*, *fjac*, *matInput*)

The conjugate gradient method is an algorithm for the numerical solution of particular systems of linear equations, namely those whose matrix is symmetric and positive-definite. The conjugate gradient method can also be used to solve unconstrained optimization problems such as energy minimization.

See also: Wieschollek [1076], Wikipedia [1415]. and https://en.wikipedia.org/wiki/Conjugate_gradient_method.

Parameters:

f
a callback matrix function defining the system.

fjac
a callback matrix function defining the Jacobian of the system system.

guess
a matrix containing the initial guess for the solution

Results:

x1
a matrix containing the solution.

Example:

The routine in Python:

```
def demo_GradientDescentCtx(ctx):

    # The function to optimize
    def matF1(X, Y):
        t1 = 1 - X[0]
        t2 = X[1] - X[0] * X[0]
        Y[0] = t1 * t1 + 100 * t2 * t2

    # The Jacobi function
    def matF2(X, Y):
        Y[0] = -2 * (1 - X[0]) + 200 * (X[1] - X[0] * X[0]) * (-2 * X[0])
        Y[1] = 200 * (X[1] - X[0] * X[0])

    # This defines the start vector
    r = 2
    c = 1
    X = ctx.matZeros(r,c)
    X[0] = 1
    X[1] = 2
    print('X: \n', X)

    # This executes the GradientDescentSolver solver
    matRes = ctx.gradientDescentSolver(matF1, matF2, X)

    # Check the result
    Y = ctx.matZeros(r,c)
    matF1(matRes, Y)
    print('matRes: \n', matRes)
    print('Y: \n', Y)
    nrm = ctx.sqrt( Y[0]*Y[0] + Y[1]*Y[1]) # result is correct
    print('Norm: \n', nrm)
```

Example:

```
Public Sub matF1(x As dbl_mat_t, y As dbl_mat_t)
    Dim t1 As Double = 1 - x(0)
```

(continues on next page)

(continued from previous page)

```
    Dim t2 As Double = x(1) - x(0) * x(0)
    y(0) = t1 * t1 + 100 * t2 * t2
End Sub

Public Sub matF2(x As dbl_mat_t, y As dbl_mat_t)
    y(0) = -2 * (1 - x(0)) + 200 * (x(1) - x(0) * x(0)) * (-2 * x(0))
    y(1) = 200 * (x(1) - x(0) * x(0))
End Sub

Sub DemoConjugatedGradientDescentSolverDbl()
    Console.WriteLine("Hello DemoConjugatedGradientDescentSolverDbl() ")
    Dim X, Y As New dbl_mat_t()
    X.resize(2, 1)
    Y.resize(X.rows, 1)
    X(0) = 1
    X(1) = 2

    Dim OptLib As New ConjugatedGradientDescentSolverDbl(AddressOf matF1, AddressOf matF2, X)
    Dim matRes = OptLib.Solve()
    matRes.print("matRes: ", 15)
    matF1(matRes, Y)
    Y.print("Y = F(matRes): ", 15)

    Dim nrm = Math.Sqrt( Y(0)*Y(0) + Y(1)*Y(1))
    Console.WriteLine("Norm: {0}", nrm)
    Console.WriteLine("")
End Sub
```

This produces the following output:

```
Hello DemoConjugatedGradientDescentSolverDbl()
matRes:
    0.999964;
    0.999928;

Y = F(matRes):
    0.000000;
    0.000000;

Norm: 1.3055097726625E-09
```

5.16.7 Newton descent solver (description needs correction)

ctxboost.**NewtonDescent**(*f*, *fjac*, *matInput*)

The conjugate gradient method is an algorithm for the numerical solution of particular systems of linear equations, namely those whose matrix is symmetric and positive-definite. The conjugate gradient method can also be used to solve unconstrained optimization problems such as energy minimization.

See also: Wieschollek [1076], Wikipedia [1415]. and https://en.wikipedia.org/wiki/Conjugate_gradient_method.

Parameters:

f
a callback matrix function defining the system.

fjac
a callback matrix function defining the Jacobian of the system system.

guess
a matrix containing the initial guess for the solution

Results:

x1
a matrix containing the solution.

Example:

The routine in Python:

```
def demo_GradientDescentCtx(ctx):

    # The function to optimize
    def matF1(X, Y):
        t1 = 1 - X[0]
        t2 = X[1] - X[0] * X[0]
        Y[0] = t1 * t1 + 100 * t2 * t2

    # The Jacobi function
    def matF2(X, Y):
        Y[0] = -2 * (1 - X[0]) + 200 * (X[1] - X[0] * X[0]) * (-2 * X[0])
        Y[1] = 200 * (X[1] - X[0] * X[0])

    # This defines the start vector
    r = 2
    c = 1
    X = ctx.matZeros(r,c)
    X[0] = 1
    X[1] = 2
    print('X: \n', X)

    # This executes the GradientDescentSolver solver
    matRes = ctx.gradientDescentSolver(matF1, matF2, X)

    # Check the result
    Y = ctx.matZeros(r,c)
    matF1(matRes, Y)
    print('matRes: \n', matRes)
    print('Y: \n', Y)
    nrm = ctx.sqrt( Y[0]*Y[0] + Y[1]*Y[1]) # result is correct
    print('Norm: \n', nrm)
```

Example:

```
Public Sub matF1(x As dbl_mat_t, y As dbl_mat_t)
    Dim t1 As Double = 1 - x(0)
```

(continues on next page)

(continued from previous page)

```
    Dim t2 As Double = x(1) - x(0) * x(0)
    y(0) = t1 * t1 + 100 * t2 * t2
End Sub

Public Sub matF2(x As dbl_mat_t, y As dbl_mat_t)
    y(0) = -2 * (1 - x(0)) + 200 * (x(1) - x(0) * x(0)) * (-2 * x(0))
    y(1) = 200 * (x(1) - x(0) * x(0))
End Sub

Sub DemoConjugatedGradientDescentSolverDbl()
    Console.WriteLine("Hello DemoConjugatedGradientDescentSolverDbl() ")
    Dim X, Y As New dbl_mat_t()
    X.resize(2, 1)
    Y.resize(X.rows, 1)
    X(0) = 1
    X(1) = 2

    Dim OptLib As New ConjugatedGradientDescentSolverDbl(AddressOf matF1, AddressOf matF2, X)
    Dim matRes = OptLib.Solve()
    matRes.print("matRes: ", 15)
    matF1(matRes, Y)
    Y.print("Y = F(matRes): ", 15)

    Dim nrm = Math.Sqrt( Y(0)*Y(0) + Y(1)*Y(1))
    Console.WriteLine("Norm: {0}", nrm)
    Console.WriteLine("")
End Sub
```

This produces the following output:

```
Hello DemoConjugatedGradientDescentSolverDbl()
matRes:
    0.999964;
    0.999928;

Y = F(matRes):
    0.000000;
    0.000000;

Norm: 1.3055097726625E-09
```

CHAPTER

SIX

EIGEN: DENSE AND SPARSE MATRICES

The source code for the C# tests in Visual Studio is divided in 4 parts:

Part 1 contains the source code for test procedures which work for real and complex dense matrices, and which work for floating point and ball arithmetic. It can be found online in the `XlCalcNet` repository or in the corresponding local `XlCalcNet` folder in the file B06a_MatAll.cs.

Part 2 contains the source code for test procedures which work for real and complex dense matrices, but which work only for floating point arithmetic. It can be found online in the `XlCalcNet` repository or in the corresponding local `XlCalcNet` folder in the file B06b_MatFp.cs.

Part 3 contains the source code for test procedures which work only for real dense matrices, and only for floating point arithmetic. It can be found online in the `XlCalcNet` repository or in the corresponding local `XlCalcNet` folder in the file B06c_MatFpReal.cs.

Part 4 contains the source code for test procedures which work only for real and complex sparse matrices, and only for floating point arithmetic. It can be found online in the `XlCalcNet` repository or in the corresponding local `XlCalcNet` folder in the file B06d_SpMat.cs.

6.1 Creating scalars and matrices

6.1.1 Creating a matrix, and converting from compatible data types

`ctx.mat_t`(x)

Converts from a real scalar of type dreal

6.1.2 Creating a matrix of zeros

`ctx.mat_zeros`(n, m)

Creates a $n \times m$ matrix of the indicated type and sets all entries to zero.

```
>>> from xlcalcnet import *
>>> ctx.dps = 15; n = 4; m = 4
>>> matA = ctx.mat_zeros(n, m, eigen=True)
>>> matA.show("matA, mat_zeros(n, m) :")
matA, mat_zeros(n, m) :
 0,  0,  0,  0,
 0,  0,  0,  0,
 0,  0,  0,  0,
 0,  0,  0,  0,
```

6.1.3 Creating a matrix of ones

`ctx.mat_ones(`n, m`)`

Creates a $n \times m$ matrix of the indicated type and sets all entries to one.

```
>>> from xlcalcnet import *
>>> ctx.dps = 15; n = 4; m = 4
>>> matA = ctx.mat_ones(n, m)
>>> matA.show("matA, mat_ones(n, m) :")
matA, mat_ones(n, m) :
 1,  1,  1,  1,
 1,  1,  1,  1,
 1,  1,  1,  1,
 1,  1,  1,  1,
```

6.1.4 Creating an identity matrix

`ctx.mat_identity(`n, m`)`

Creates a $n \times m$ identity matrix of the indicated type.

```
>>> from xlcalcnet import *
>>> ctx.dps = 15; n = 4; m = 4
>>> matA = ctx.mat_identity(n, m)
>>> matA.show("matA, mat_identity(n, m) :")
matA, mat_identity(n, m) :
 1,  0,  0,  0,
 0,  1,  0,  0,
 0,  0,  1,  0,
 0,  0,  0,  1,
```

6.1.5 Creating a general random matrix

`ctx.mat_random(`n, m`)`

Creates a $n \times m$ matrix of the indicated type and sets all entries to random values.

```
>>> from xlcalcnet import *
>>> ctx.dps = 15; n = 4; m = 4
>>> matA = ctx.mat_random(n, m)
>>> matA.show("matA, mat_random(n, m) :")
matA, mat_random(n, m) :
 0.35029145176550,  0.17410809656056,  0.30399487289041,  0.14731284524064,
 0.89596240119633,  0.85894344920194,  0.014984588152715,  0.16589861751152,
 0.82284005249184,  0.71050141911069,  0.091402935880612,  0.98852504043703,
 0.74660481582080,  0.51353495895260,  0.36445204016236,  0.44569231238746,
```

6.1.6 Creating a symmetric random matrix

`ctx.mat_random_symmetric(`n`)`

Creates a $n \times n$ symmetric matrix of the indicated type and sets all entries to random values.

```
>>> from xlcalcnet import *
>>> ctx.dps = 15; n = 4; m = 4
>>> matA = ctx.mat_random_symmetric(n)
>>> matA.show("matA, mat_random_symmetric(n) :")
matA, mat_random_symmetric(n) :
 0.23816644795068,  0.53633228553118,  0.17514572588275,  0.43491927854244,
 0.53633228553118,  1.1423688467055,  1.2648091067232,  1.2148503067110,
 0.17514572588275,  1.2648091067232,  0.90157780693990,  1.1354411450545,
 0.43491927854244,  1.2148503067110,  1.1354411450545,  1.6052125614185,
```

6.1.7 Creating a self-adjoint random matrix

`ctx.`**`mat_random_selfadjoint`**(*n*, *complex=False*, *eigen=False*)

Creates a $n \times n$ selfadjoint matrix of the indicated type and sets all entries to random values.

```
>>> from xlcalcnet import *
>>> ctx.dps = 15; n = 4; m = 4
>>> matA = ctx.mat_random_sa(n)
>>> matA.show("matA, mat_random_sa(n) :")
matA, mat_random_sym(n) :
 0.23816644795068,  0.53633228553118,  0.17514572588275,  0.43491927854244,
 0.53633228553118,  1.1423688467055,  1.2648091067232,  1.2148503067110,
 0.17514572588275,  1.2648091067232,  0.90157780693990,  1.1354411450545,
 0.43491927854244,  1.2148503067110,  1.1354411450545,  1.6052125614185,
```

6.1.8 Creating a positive definite self-adjoint matrix

`ctx.`**`mat_random_selfadjoint_posdef`**(*n*, *complex=False*, *eigen=False*)

Creates a $n \times n$ positive definite random matrix of the indicated type.

```
>>> from xlcalcnet import *
>>> ctx.dps = 15; n = 4; m = 4
>>> matA = ctx.mat_random_sa_posdef(n)
>>> matA.show("matA, mat_random_sa_posdef(n)")
matA, mat_random_sa_posdef(n)
 1.6144949159812,  0.37328104299787,  0.64671931578811,  1.0725029543798,
 0.37328104299787,  0.23220359390837,  0.27432857744706,  0.35913470470614,
 0.64671931578811,  0.27432857744706,  0.55785829596540,  0.52838216584663,
 1.0725029543798,  0.35913470470614,  0.52838216584663,  1.4188647561723,
```

6.1.9 Creating a matrix with linearly increasing values

`ctx.`**`mat_fill_linear`**(*n*, *m*, *x*)

Creates a $n \times m$ matrix of the indicated type and sets all entries to increasing values.

```
>>> from xlcalcnet import *
>>> ctx.dps = 15; n = 4; m = 4
>>> matA = ctx.mat_linspace(n, m, x)
>>> matA.show("matA, mat_linspace(n, m, x) :")
matA, mat_linspace(n, m, x) :
 0,  0,  0,  0,
 0,  0,  0,  0,
 0,  0,  0,  0,
 0,  0,  0,  0,
```

6.2 Read-only properties: information about a matrix

6.2.1 Rows of a matrix

`ctx.`**`mat_rows`**`(`*matA*`)`

Returns the number of rows of the matrix. Writing `matA.rows` has the same effect.

```
>>> from xlcalcnet import *
>>> mpm.dps = 15;
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableA6x4", "")
>>> print("A.rows: ", A.rows)
A.rows: 6
```

6.2.2 Columns of a matrix

`ctx.`**`mat_cols`**`(`*matA*`)`

Returns the number of columns of the matrix. Writing `matA.cols` has the same effect,

```
>>> from xlcalcnet import *
>>> mpm.dps = 15;
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableA6x4", "")
>>> print("A.cols: ", A.cols)
A.cols: 4
```

6.2.3 Size of a matrix

`ctx.`**`mat_size`**`(`*matA*`)`

Returns the size of the matrix. Writing `matA.size` has the same effect.

```
>>> from xlcalcnet import *
>>> mpm.dps = 15;
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableA6x4", "")
>>> print("A.size: ", A.size)
A.cols: 24
```

6.3 Accessing and setting parts of a matrix

6.3.1 Getting and setting a matrix coefficient

Individual coefficients of a matrix A are accessed using the `A[row,col]` syntax. Note that indexing starts at 0, so that the coefficient in the 4^{th} row and 2^{nd} column is accessed as `A[3,1]`. Examples:

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf()
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableA6x4", ""); A.show("A")
A:
11,  12,  13,  14,
21,  22,  23,  24,
31,  32,  33,  34,
41,  42,  43,  44,
51,  52,  53,  54,
61,  62,  63,  64,

>>> # gets the coefficient in row number 3 and column number 1
>>> print("A[3,1]: ", A[3,1])
A[3,1]:  42

>>> # sets the coefficient in row number 1 and column number 2 to the value of 99.
>>> A[1,2] = 99; A.show("A")
matA:
11,  12,  13,  14,
21,  22,  99,  24,
31,  32,  33,  34,
41,  42,  43,  44,
51,  52,  53,  54,
61,  62,  63,  64,
```

6.3.2 Getting and setting a block

`ctx.`**`mat_get_block`**(*matA*, *i*, *j*, *p*, *q*)

Gets a block of the matrix, starting at row i and column j, with p row elements and q column elements. Writing `matA.get_Block(i, j, p, q)` has the same effect

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf()
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableA6x4", ""); A.show("A")
A:
11,  12,  13,  14,
21,  22,  23,  24,
31,  32,  33,  34,
41,  42,  43,  44,
51,  52,  53,  54,
61,  62,  63,  64,

>>> # gets a block, beginning at A[1, 1], stretching to A[1+3, 1+2]
>>> b1 = A.block(1, 1, 3, 2); b1.show("b1")
b1:
22,  23,
32,  33,
42,  43,
```

`ctx.`**`mat_set_block`**(*matA*, *i*, *j*, *p*, *q*, *matB*)

Sets a block of the matrix to *matB*, starting at row i and column j, with p row elements and q column elements. Writing `matA.set_Block(i, j, p, q, matB)` has the same effect

```
>>> # continued from above
>>> # sets b1 into a block, beginning at A[0, 0], stretching to A[0+3, 0+2]
```

(continues on next page)

(continued from previous page)

```
>>> A.set_Block(0, 0, 3, 2, b1); ; A.show("A")
A:
22,  23,  13,  14,
32,  33,  23,  24,
42,  43,  33,  34,
41,  42,  43,  44,
51,  52,  53,  54,
61,  62,  63,  64,
```

6.3.3 Getting and setting a matrix row

ctx.mat_get_row(*matA*, *i*)

Gets the i^{th} row. Writing `matA.get_Row(i)` has the same effect

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf()
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableA6x4", ""); A.show("A")
A:
11,  12,  13,  14,
21,  22,  23,  24,
31,  32,  33,  34,
41,  42,  43,  44,
51,  52,  53,  54,
61,  62,  63,  64,

>>> # gets row number 2 (i.e. the 3rd row from the top)
>>> r1 = A.row(2); r1.show("r1")
r1:
31,  32,  33,  34,
```

ctx.mat_set_row(*matA*, *i*, *matB*)

Sets the i^{th} row to *matB*. Writing `matA.set_Row(i, matB)` has the same effect

```
>>> # continued from above
>>> # sets the content of row number 5 to the content of row number 2
>>> A.set_Row(5, A.get_Row(2)); A.show("A")
A:
11,  12,  13,  14,
21,  22,  23,  24,
31,  32,  33,  34,
41,  42,  43,  44,
51,  52,  53,  54,
31,  32,  33,  34,
```

6.3.4 Getting and setting a matrix column

ctx.mat_get_col(*matA*, *j*)

Gets the j^{th} column. Writing `matA.get_Col(j)` has the same effect

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf()
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableA6x4", ""); A.show("A")
A:
11,  12,  13,  14,
21,  22,  23,  24,
31,  32,  33,  34,
41,  42,  43,  44,
51,  52,  53,  54,
61,  62,  63,  64,
```

(continues on next page)

(continued from previous page)

```
>>> # gets column number 1 (i.e. the 2nd column from the left)
>>> c1 = A.col(1); c1.show("c1")
c1:
12,
22,
32,
42,
52,
62,
```

`ctx.`**`mat_set_col`**`(`*matA*, *j*, *matB*`)`

Sets the j^{th} column to *matB*. Writing `matA.set_Col(j, matB)` has the same effect

```
>>> # continued from above
>>> # sets the content of column number 3 to the content of column number 1
>>> A.set_Col(3, A.get_Col(1)); A.show("A")
A:
11,  12,  13,  12,
21,  22,  23,  22,
31,  32,  33,  32,
41,  42,  43,  42,
51,  52,  53,  52,
61,  62,  63,  62,
```

6.3.5 Getting and setting a diagonal

`ctx.`**`mat_get_diagonal`**`(`*matA*, *q=0*`)`

Gets the diagonal or a subdiagonal of the matrix. Writing `matA.get_Diagonal(q=0)` has the same effect.

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf()
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableA6x4", ""); A.show("A")
A:
11,  12,  13,  14,
21,  22,  23,  24,
31,  32,  33,  34,
41,  42,  43,  44,
51,  52,  53,  54,
61,  62,  63,  64,

>>> # gets the first lower subdiagonal
>>> b1 = A.diagonal(-1); b1.show("b1")
b1 = A.diagonal(-1):
21,
32,
43,
54,
```

`ctx.`**`mat_set_diagonal`**`(`*matA*, *q*, *matB*`)`

Sets the diagonal or a subdiagonal of the matrix to *matB*. Writing `matA.set_Diagonal(q, matB)` has the same effect.

```
>>> # continued from above
>>> # sets the diagonal to the first lower subdiagonal
>>> A.set_Diagonal(0, b1); A.show("A")
A:
21,  12,  13,  14,
21,  32,  23,  24,
31,  32,  43,  34,
41,  42,  43,  54,
51,  52,  53,  54,
61,  62,  63,  64,
```

6.3.6 Getting and setting a triangular view

`ctx.`**`mat_get_triangular_view`**(*matA*, *view=1*)

Gets the triangular view of the matrix. Writing `matA.get_TriangularView(View = 1)` has the same effect.

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf()
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableA6x4", ""); A.show("A")
A:
11,  12,  13,  14,
21,  22,  23,  24,
31,  32,  33,  34,
41,  42,  43,  44,
51,  52,  53,  54,
61,  62,  63,  64,

>>> # gets the first lower subdiagonal
>>> b1 = A.diagonal(-1); b1.show("b1")
b1 = A.diagonal(-1):
21,
32,
43,
54,
```

`ctx.`**`mat_set_triangular_view`**(*matA*, *view*, *matB*)

Sets the triangular view of the matrix to *matB*. Writing `matA.set_TriangularView(View, matB)` has the same effect.

```
>>> # continued from above
>>> # sets the diagonal to the first lower subdiagonal
>>> A.set_Diagonal(0, b1); A.show("A")
A:
21,  12,  13,  14,
21,  32,  23,  24,
31,  32,  43,  34,
41,  42,  43,  54,
51,  52,  53,  54,
61,  62,  63,  64,
```

6.4 Changing the shape of a matrix and/or the order of coefficients

6.4.1 Sorting a whole matrix

`ctx.mat_sort(`*matA*, *sort_order=0*, *sort_criterion=1*`)`

Returns a sorted version of the matrix, sorted according to SortOrder and SortCriterion.

Writing `matA.Sort(sort_order=0, sort_criterion=1)` has the same effect

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf()
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableA6x4", ""); A.show("A")
A:
11, 12, 13, 14,
21, 22, 23, 24,
31, 32, 33, 34,
41, 42, 43, 44,
51, 52, 53, 54,
61, 62, 63, 64,

>>> # returns a copy of the whole matrix in ascending order (SortOrder=0)
>>> B = A.sorted(SortOrder=0); B.show("B")
B:
11, 23, 41, 53,
12, 24, 42, 54,
13, 31, 43, 61,
14, 32, 44, 62,
21, 33, 51, 63,
22, 34, 52, 64,

>>> # sorts the whole matrix in descending order (SortOrder=1)
>>> C = A.sorted(SortOrder=1); C.show("C")
C:
64, 52, 34, 22,
63, 51, 33, 21,
62, 44, 32, 14,
61, 43, 31, 13,
54, 42, 24, 12,
53, 41, 23, 11,
```

6.4.2 Sorting the rows of a matrix by a given column

`ctx.mat_sort_rows_by_col(`*matA*, *column_to_sort_by=0*, *sort_order=0*, *sort_criterion=1*`)`

Returns a sorted version of the matrix, sorted by column ColumnToSortBy, according to SortOrder and SortCriterion.

Writing `matA.SortRowsByCol(column_to_sort_by=0, sort_order=0, sort_criterion=1)` has the same effect

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf()
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableA6x4", ""); A.show("A")
A:
11, 12, 13, 14,
21, 22, 23, 24,
31, 32, 33, 34,
41, 42, 43, 44,
51, 52, 53, 54,
61, 62, 63, 64,

>>> # sorts the whole matrix by column 0 in descending order (SortOrder=1)
>>> B = A.sorted_rows_by_col(ColumnToSortBy=0, SortOrder=1); B.show("B")
B:
61, 62, 63, 64,
51, 52, 53, 54,
```

(continues on next page)

(continued from previous page)

```
41, 42, 43, 44,
31, 32, 33, 34,
21, 22, 23, 24,
11, 12, 13, 14,

>>> # sorts the whole matrix in descending order (SortOrder=0)
>>> C = A.sorted_rows_by_col(ColumnToSortBy=0, SortOrder=0); C.show("C")
C:
11, 12, 13, 14,
21, 22, 23, 24,
31, 32, 33, 34,
41, 42, 43, 44,
51, 52, 53, 54,
61, 62, 63, 64,
```

6.4.3 Resize a matrix

`ctx.`**`mat_resize`**(*matA*, *r*, *c*)

Resizes the matrix inplace, setting values of coefficients to zero.

Writing `matA.Resize(r, c)` has the same effect

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf()
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableA6x4", ""); A.show("A")
A:
11, 12, 13, 14,
21, 22, 23, 24,
31, 32, 33, 34,
41, 42, 43, 44,
51, 52, 53, 54,
61, 62, 63, 64,

>>> # resizes the matrix to 3 rows and 2 columns, setting values of coefficients to zero.
>>> A.resize(3,2); A.show("A")
A:
0, 0,
0, 0,
0, 0,
```

6.4.4 Resize a matrix like another matrix

`ctx.`**`mat_resize_like`**(*matA*, *matB*)

Resizes the matrix inplace, setting values of coefficients to zero.

Writing `matA.ResizeLike(matB)` has the same effect

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf()
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableA6x4", ""); A.show("A")
A:
11, 12, 13, 14,
21, 22, 23, 24,
31, 32, 33, 34,
41, 42, 43, 44,
51, 52, 53, 54,
61, 62, 63, 64,

>>> # resizes the matrix to 3 rows and 2 columns, setting values of coefficients to zero.
>>> A.resize(3,2); A.show("A")
A:
```

(continues on next page)

(continued from previous page)

```
0, 0,
0, 0,
0, 0,
```

6.4.5 Conservatively resize a matrix

`ctx.`**`mat_conservative_resize`**`(`*matA*, *r*, *c*`)`

Resizes the matrix inplace, retaining values of existing coefficients.

Writing `matA.ConservativeResize(r, c)` has the same effect

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf()
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableA6x4", ""); A.show("A")
A:
11, 12, 13, 14,
21, 22, 23, 24,
31, 32, 33, 34,
41, 42, 43, 44,
51, 52, 53, 54,
61, 62, 63, 64,

>>> # resizes the matrix to 3 rows and 6 columns, retaining values of existing coefficients.
>>> A.conservative_resize(3,6); A.show("A")
A:
11, 12, 13, 14,  0,  0,
21, 22, 23, 24,  0,  0,
31, 32, 33, 34,  0,  0,
```

6.4.6 Convert vector to diagonal matrix

`ctx.`**`mat_as_diagonal`**`(`*matA*`)`

Returns the first column vector of a matrix as a diagonal matrix.

Writing `matA.AsDiagonal()` has the same effect

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf()
>>> # read the first column from the matrix
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableA6x4", "").col(0); A.show("A")
A:
11,
21,
31,
41,
51,
61,

>>> # resizes the matrix to 3 rows and 6 columns, retaining values of existing coefficients.
>>> B = A.as_diagonal(); B.show("B")
B:
11,  0,  0,  0,  0,  0,
 0, 21,  0,  0,  0,  0,
 0,  0, 31,  0,  0,  0,
 0,  0,  0, 41,  0,  0,
 0,  0,  0,  0, 51,  0,
 0,  0,  0,  0,  0, 61,
```

6.4.7 Adjoint of a matrix

`ctx.mat_adjoint(matA)`

Returns the adjoint matrix of the matrix. Writing `matA.Adjoint()` has the same effect

```
>>> from xlcalcnet import *

>>> # example with a real matrix
>>> ctx = mp14.drf()
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableA6x6", ""); A.show("A")
A:
11, 12, 13, 14, 15, 16,
21, 22, 23, 24, 25, 26,
31, 32, 33, 34, 35, 36,
41, 42, 43, 44, 45, 46,
51, 52, 53, 54, 55, 56,
61, 62, 63, 64, 65, 66,


>>> # returns the adjoint matrix of a real matrix, i.e. the transpose
>>> B = A.adjoint(); B.show("B")
B:
11, 21, 31, 41, 51, 61,
12, 22, 32, 42, 52, 62,
13, 23, 33, 43, 53, 63,
14, 24, 34, 44, 54, 64,
15, 25, 35, 45, 55, 65,
16, 26, 36, 46, 56, 66,


>>> # example with a complex matrix
>>> ctx = mp14.dcf()
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecCplxTableA6x6", ""); A.show("A")
A:
11 + 31j, 12 + 32j, 13 + 33j, 14 + 34j, 15 + 35j, 16 + 36j,
21 + 41j, 22 + 42j, 23 + 43j, 24 + 44j, 25 + 45j, 26 + 46j,
31 + 51j, 32 + 52j, 33 + 53j, 34 + 54j, 35 + 55j, 36 + 56j,
41 + 61j, 42 + 62j, 43 + 63j, 44 + 64j, 45 + 65j, 46 + 66j,
51 + 71j, 52 + 72j, 53 + 73j, 54 + 74j, 55 + 75j, 56 + 76j,
61 + 81j, 62 + 82j, 63 + 83j, 64 + 84j, 65 + 85j, 66 + 86j,


>>> # returns the adjoint matrix of a complex matrix, i.e. the conjugate of the transpose
>>> B = A.adjoint(); B.show("B")
B:
11 + -31j, 21 + -41j, 31 + -51j, 41 + -61j, 51 + -71j, 61 + -81j,
12 + -32j, 22 + -42j, 32 + -52j, 42 + -62j, 52 + -72j, 62 + -82j,
13 + -33j, 23 + -43j, 33 + -53j, 43 + -63j, 53 + -73j, 63 + -83j,
14 + -34j, 24 + -44j, 34 + -54j, 44 + -64j, 54 + -74j, 64 + -84j,
15 + -35j, 25 + -45j, 35 + -55j, 45 + -65j, 55 + -75j, 65 + -85j,
16 + -36j, 26 + -46j, 36 + -56j, 46 + -66j, 56 + -76j, 66 + -86j,
```

6.4.8 Conjugate of a matrix

`ctx.mat_conjugate(matA)`

Returns the conjugate matrix of matrix matA. Writing `matA.Conjugate()` has the same effect

```
>>> from xlcalcnet import *

>>> # example with a real matrix
>>> ctx = mp14.drf()
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableA6x6", ""); A.show("A")
A:
11, 12, 13, 14, 15, 16,
```

(continues on next page)

(continued from previous page)

```
21, 22, 23, 24, 25, 26,
31, 32, 33, 34, 35, 36,
41, 42, 43, 44, 45, 46,
51, 52, 53, 54, 55, 56,
61, 62, 63, 64, 65, 66,


>>> # returns the conjugate matrix of a real matrix, i.e. the matrix itself
>>> B = A.conjugate(); B.show("B")
B:
11, 12, 13, 14, 15, 16,
21, 22, 23, 24, 25, 26,
31, 32, 33, 34, 35, 36,
41, 42, 43, 44, 45, 46,
51, 52, 53, 54, 55, 56,
61, 62, 63, 64, 65, 66,


>>> # example with a complex matrix
>>> ctx = mp14.dcf()
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecCplxTableA6x6", ""); A.show("A")
A:
11 + 31j, 12 + 32j, 13 + 33j, 14 + 34j, 15 + 35j, 16 + 36j,
21 + 41j, 22 + 42j, 23 + 43j, 24 + 44j, 25 + 45j, 26 + 46j,
31 + 51j, 32 + 52j, 33 + 53j, 34 + 54j, 35 + 55j, 36 + 56j,
41 + 61j, 42 + 62j, 43 + 63j, 44 + 64j, 45 + 65j, 46 + 66j,
51 + 71j, 52 + 72j, 53 + 73j, 54 + 74j, 55 + 75j, 56 + 76j,
61 + 81j, 62 + 82j, 63 + 83j, 64 + 84j, 65 + 85j, 66 + 86j,


>>> # returns the conjugate matrix of a complex matrix
>>> B = A.conjugate(); B.show("B")
B:
11 + -31j, 12 + -32j, 13 + -33j, 14 + -34j, 15 + -35j, 16 + -36j,
21 + -41j, 22 + -42j, 23 + -43j, 24 + -44j, 25 + -45j, 26 + -46j,
31 + -51j, 32 + -52j, 33 + -53j, 34 + -54j, 35 + -55j, 36 + -56j,
41 + -61j, 42 + -62j, 43 + -63j, 44 + -64j, 45 + -65j, 46 + -66j,
51 + -71j, 52 + -72j, 53 + -73j, 54 + -74j, 55 + -75j, 56 + -76j,
61 + -81j, 62 + -82j, 63 + -83j, 64 + -84j, 65 + -85j, 66 + -86j,
```

6.4.9 Transpose of a matrix

`ctx.`**`mat_transpose`**`(`*matA*`)`

Returns the transposed matrix of matrix matA. Writing `matA.Transpose()` has the same effect

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf()
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableA6x4", ""); A.show("A")
A:
11, 12, 13, 14,
21, 22, 23, 24,
31, 32, 33, 34,
41, 42, 43, 44,
51, 52, 53, 54,
61, 62, 63, 64,

>>> # returns the transpose matrix of a real matrix
>>> B = A.transpose(); B.show("B")
B:
11, 21, 31, 41, 51, 61,
12, 22, 32, 42, 52, 62,
13, 23, 33, 43, 53, 63,
14, 24, 34, 44, 54, 64,
```

6.4.10 Full Reverse of a matrix

`ctx.mat_reverse_full(matA)`

Returns the full reverse of matrix matA. Writing `matA.ReverseFull()` has the same effect

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf()
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableA6x4", ""); A.show("A")
A:
11, 12, 13, 14,
21, 22, 23, 24,
31, 32, 33, 34,
41, 42, 43, 44,
51, 52, 53, 54,
61, 62, 63, 64,

>>> # returns the full reverse  of the matrix
>>> B = A.reverse_full(); B.show("B")
B:
64, 63, 62, 61,
54, 53, 52, 51,
44, 43, 42, 41,
34, 33, 32, 31,
24, 23, 22, 21,
14, 13, 12, 11,
```

6.4.11 Row-wise Reverse of a matrix

`ctx.mat_reverse_row_wise(matA)`

Returns the row-wise reverse of matrix matA. Writing `matA.ReverseRowwise()` has the same effect

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf()
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableA6x4", ""); A.show("A")
A:
11, 12, 13, 14,
21, 22, 23, 24,
31, 32, 33, 34,
41, 42, 43, 44,
51, 52, 53, 54,
61, 62, 63, 64,

>>> # returns the row-wise reverse of the matrix
>>> B = A.reverse_rowwise(); B.show("B")
14, 13, 12, 11,
24, 23, 22, 21,
34, 33, 32, 31,
44, 43, 42, 41,
54, 53, 52, 51,
64, 63, 62, 61,
```

6.4.12 Column-wise Reverse of a matrix

`ctx.mat_reverse_col_wise(matA)`

Returns the column-wise reverse of matrix matA. Writing `matA.ReverseColwise()` has the same effect

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf()
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableA6x4", ""); A.show("A")
A:
11, 12, 13, 14,
21, 22, 23, 24,
```

(continues on next page)

(continued from previous page)

```
31, 32, 33, 34,
41, 42, 43, 44,
51, 52, 53, 54,
61, 62, 63, 64,

>>> # returns the column-wise reverse of the matrix
>>> B = A.reverse_colwise(); B.show("B")
B:
61, 62, 63, 64,
51, 52, 53, 54,
41, 42, 43, 44,
31, 32, 33, 34,
21, 22, 23, 24,
11, 12, 13, 14,
```

6.4.13 Full Replication of a matrix

`ctx.`**`mat_replicate_full`**`(`*matA*, *vertical*, *horizontal*`)`

Returns a full replication of matrix matA. Writing `matA.ReplicateFull(vertical, horizontal)` has the same effect

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf()
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableA6x4", ""); A.show("A")
A:
11, 12, 13, 14,
21, 22, 23, 24,
31, 32, 33, 34,
41, 42, 43, 44,
51, 52, 53, 54,
61, 62, 63, 64,

>>> # returns a full replication (Vertical=2, Horizontal=3) of the matrix
>>> B = A.replicate_full(2, 3); B.show("B")
B:
11, 12, 13, 14, 11, 12, 13, 14, 11, 12, 13, 14,
21, 22, 23, 24, 21, 22, 23, 24, 21, 22, 23, 24,
31, 32, 33, 34, 31, 32, 33, 34, 31, 32, 33, 34,
41, 42, 43, 44, 41, 42, 43, 44, 41, 42, 43, 44,
51, 52, 53, 54, 51, 52, 53, 54, 51, 52, 53, 54,
61, 62, 63, 64, 61, 62, 63, 64, 61, 62, 63, 64,
11, 12, 13, 14, 11, 12, 13, 14, 11, 12, 13, 14,
21, 22, 23, 24, 21, 22, 23, 24, 21, 22, 23, 24,
31, 32, 33, 34, 31, 32, 33, 34, 31, 32, 33, 34,
41, 42, 43, 44, 41, 42, 43, 44, 41, 42, 43, 44,
51, 52, 53, 54, 51, 52, 53, 54, 51, 52, 53, 54,
61, 62, 63, 64, 61, 62, 63, 64, 61, 62, 63, 64,
```

6.4.14 Row-wise Replication of a matrix

`ctx.`**`mat_replicate_row_wise`**`(`*matA*, *horizontal*`)`

Returns a row-wise replication of matrix matA. Writing `matA.ReplicateRowwise(horizontal)` has the same effect

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf()
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableA6x4", ""); A.show("A")
A:
11, 12, 13, 14,
21, 22, 23, 24,
31, 32, 33, 34,
41, 42, 43, 44,
51, 52, 53, 54,
```

(continues on next page)

(continued from previous page)

```
61, 62, 63, 64,

>>> # returns a row-wise replication (Horizontal=4) of the matrix
>>> B = A.replicate_rowwise(4); B.show("B")
B:
11, 12, 13, 14, 11, 12, 13, 14, 11, 12, 13, 14, 11, 12, 13, 14,
21, 22, 23, 24, 21, 22, 23, 24, 21, 22, 23, 24, 21, 22, 23, 24,
31, 32, 33, 34, 31, 32, 33, 34, 31, 32, 33, 34, 31, 32, 33, 34,
41, 42, 43, 44, 41, 42, 43, 44, 41, 42, 43, 44, 41, 42, 43, 44,
51, 52, 53, 54, 51, 52, 53, 54, 51, 52, 53, 54, 51, 52, 53, 54,
61, 62, 63, 64, 61, 62, 63, 64, 61, 62, 63, 64, 61, 62, 63, 64,
```

6.4.15 Column-wise Replication of a matrix

`ctx.`**`mat_replicate_col_wise`**`(`*matA*, *vertical*`)`

Returns a column-wise replication of matrix matA. Writing `matA.ReplicateColwise(vertical)` has the same effect

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf()
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableA6x4", ""); A.show("A")
A:
11, 12, 13, 14,
21, 22, 23, 24,
31, 32, 33, 34,
41, 42, 43, 44,
51, 52, 53, 54,
61, 62, 63, 64,

>>> # returns a column-wise replication (Vertical=2) of the matrix
>>> B = A.replicate_colwise(2); B.show("B")
B:
11, 12, 13, 14,
21, 22, 23, 24,
31, 32, 33, 34,
41, 42, 43, 44,
51, 52, 53, 54,
61, 62, 63, 64,
11, 12, 13, 14,
21, 22, 23, 24,
31, 32, 33, 34,
41, 42, 43, 44,
51, 52, 53, 54,
61, 62, 63, 64,
```

6.4.16 Horizontal concatenation of two matrices

`ctx.`**`mat_concat_horizontal`**`(`*matA*, *matB*`)`

Returns the horizontal concatenation of matrix matA with matrix matB. Writing `matA.ConcatHorizontal(matB)` has the same effect

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf()
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableA6x6", ""); A.show("A")
A:
11, 12, 13, 14, 15, 16,
21, 22, 23, 24, 25, 26,
31, 32, 33, 34, 35, 36,
41, 42, 43, 44, 45, 46,
51, 52, 53, 54, 55, 56,
61, 62, 63, 64, 65, 66,
```

(continues on next page)

(continued from previous page)

```
>>> B = ctx.read_from_sqlite(mp14.dbpath(), "DecTableB6x6", ""); B.show("B")
B:
911, 912, 913, 914, 915, 916,
921, 922, 923, 924, 925, 926,
931, 932, 933, 934, 935, 936,
941, 942, 943, 944, 945, 946,
951, 952, 953, 954, 955, 956,
961, 962, 963, 964, 965, 966,

>>> # returns a column-wise replication (Vertical=2) of the matrix
>>> C = A.concat_horizontal(B); C.show("C")
C:
 11,  12,  13,  14,  15,  16, 911, 912, 913, 914, 915, 916,
 21,  22,  23,  24,  25,  26, 921, 922, 923, 924, 925, 926,
 31,  32,  33,  34,  35,  36, 931, 932, 933, 934, 935, 936,
 41,  42,  43,  44,  45,  46, 941, 942, 943, 944, 945, 946,
 51,  52,  53,  54,  55,  56, 951, 952, 953, 954, 955, 956,
 61,  62,  63,  64,  65,  66, 961, 962, 963, 964, 965, 966,
```

6.4.17 Vertical concatenation of two matrices

`ctx.`**`mat_concat_vertical`**`(`*matA*, *matB*`)`

Returns the vertical concatenation of matrix matA with matrix matB.

Writing `matA.ConcatVertical(matB)` has the same effect

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf()
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableA6x6", ""); A.show("A")
A:
11, 12, 13, 14, 15, 16,
21, 22, 23, 24, 25, 26,
31, 32, 33, 34, 35, 36,
41, 42, 43, 44, 45, 46,
51, 52, 53, 54, 55, 56,
61, 62, 63, 64, 65, 66,

>>> B = ctx.read_from_sqlite(mp14.dbpath(), "DecTableB6x6", ""); B.show("B")
B:
911, 912, 913, 914, 915, 916,
921, 922, 923, 924, 925, 926,
931, 932, 933, 934, 935, 936,
941, 942, 943, 944, 945, 946,
951, 952, 953, 954, 955, 956,
961, 962, 963, 964, 965, 966,

>>> # returns a column-wise replication (Vertical=2) of the matrix
>>> C = A.concat_vertical(B); C.show("C")
C:
 11,  12,  13,  14,  15,  16,
 21,  22,  23,  24,  25,  26,
 31,  32,  33,  34,  35,  36,
 41,  42,  43,  44,  45,  46,
 51,  52,  53,  54,  55,  56,
 61,  62,  63,  64,  65,  66,
911, 912, 913, 914, 915, 916,
921, 922, 923, 924, 925, 926,
931, 932, 933, 934, 935, 936,
941, 942, 943, 944, 945, 946,
951, 952, 953, 954, 955, 956,
961, 962, 963, 964, 965, 966,
```

6.5 Basic arithmetic operations

6.5.1 Matrix deep copy (unary plus)

Returns the matrix multiplied with +1. This results in a deep copy of the matrix.

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf()
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableA6x6", ""); A.show("A")
A:
11, 12, 13, 14, 15, 16,
21, 22, 23, 24, 25, 26,
31, 32, 33, 34, 35, 36,
41, 42, 43, 44, 45, 46,
51, 52, 53, 54, 55, 56,
61, 62, 63, 64, 65, 66,
>>> B = A
>>> C = +A
>>> A[1,1] = 99
>>> B.show("B")
B:
11, 12, 13, 14, 15, 16,
21, 99, 23, 24, 25, 26,
31, 32, 33, 34, 35, 36,
41, 42, 43, 44, 45, 46,
51, 52, 53, 54, 55, 56,
61, 62, 63, 64, 65, 66,
>>> C.show("C")
C:
11, 12, 13, 14, 15, 16,
21, 22, 23, 24, 25, 26,
31, 32, 33, 34, 35, 36,
41, 42, 43, 44, 45, 46,
51, 52, 53, 54, 55, 56,
61, 62, 63, 64, 65, 66,
```

6.5.2 Matrix negation (unary minus)

Returns the matrix multiplied with -1.

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf()
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableA6x6", ""); A.show("A")
A:
11, 12, 13, 14, 15, 16,
21, 22, 23, 24, 25, 26,
31, 32, 33, 34, 35, 36,
41, 42, 43, 44, 45, 46,
51, 52, 53, 54, 55, 56,
61, 62, 63, 64, 65, 66,
>>> B = -A
>>> B.show("B")
B:
-11, -12, -13, -14, -15, -16,
-21, -99, -23, -24, -25, -26,
-31, -32, -33, -34, -35, -36,
-41, -42, -43, -44, -45, -46,
-51, -52, -53, -54, -55, -56,
-61, -62, -63, -64, -65, -66,
```

6.5.3 General matrix addition

Returns the sum of matrix matA and matrix matB. matA and matB need to be of the same type and need to have the same dimensions. The returned matrix is of the same type as matA. Special rules apply for mixing real and complex matrices.

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf()
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableA6x6", ""); A.show("A")
A:
11, 12, 13, 14, 15, 16,
21, 22, 23, 24, 25, 26,
31, 32, 33, 34, 35, 36,
41, 42, 43, 44, 45, 46,
51, 52, 53, 54, 55, 56,
61, 62, 63, 64, 65, 66,
>>> B = ctx.read_from_sqlite(mp14.dbpath(), "DecTableB6x6", ""); B.show("B")
B:
911, 912, 913, 914, 915, 916,
921, 922, 923, 924, 925, 926,
931, 932, 933, 934, 935, 936,
941, 942, 943, 944, 945, 946,
951, 952, 953, 954, 955, 956,
961, 962, 963, 964, 965, 966,
>>> C = A + B; C.show("C")
C:
 922,  924,  926,  928,  930,  932,
 942,  944,  946,  948,  950,  952,
 962,  964,  966,  968,  970,  972,
 982,  984,  986,  988,  990,  992,
1002, 1004, 1006, 1008, 1010, 1012,
1022, 1024, 1026, 1028, 1030, 1032,
```

6.5.4 Matrix addition of a vector as diagonal matrix

Returns the matrix product of matrix matA and matrix matB. matA and matB need to be of the same type and need to have compatible dimensions. The returned matrix is of the same type as matA. Special rules apply for mixing real and complex matrices.

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf()
>>> # read the first column from the matrix
>>> d = ctx.read_from_sqlite(mp14.dbpath(), "DecTableB6x6", "").col(0); d.show("d")
d:
911,
921,
931,
941,
951,
961,

>>> # creates a square matrix with the coefficents of d1 on the diagonal.
>>> D = d.as_diagonal(); D.show("D")
D:
911,   0,   0,   0,   0,   0,
  0, 921,   0,   0,   0,   0,
  0,   0, 931,   0,   0,   0,
  0,   0,   0, 941,   0,   0,
  0,   0,   0,   0, 951,   0,
  0,   0,   0,   0,   0, 961,

>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableA6x6", ""); A.show("A")
A:
11, 12, 13, 14, 15, 16,
21, 22, 23, 24, 25, 26,
31, 32, 33, 34, 35, 36,
41, 42, 43, 44, 45, 46,
```

(continues on next page)

(continued from previous page)

```
51, 52, 53, 54, 55, 56,
61, 62, 63, 64, 65, 66,

>>> C = A + D; C.show("C")    # same as D + A()
C:
 922,   12,   13,   14,   15,   16,
  21,  943,   23,   24,   25,   26,
  31,   32,  964,   34,   35,   36,
  41,   42,   43,  985,   45,   46,
  51,   52,   53,   54, 1006,   56,
  61,   62,   63,   64,   65, 1027,

>>> C = A + d.diagonal_view(); C.show("C")    # same as d.diagonal_view + A()
C:
 922,   12,   13,   14,   15,   16,
  21,  943,   23,   24,   25,   26,
  31,   32,  964,   34,   35,   36,
  41,   42,   43,  985,   45,   46,
  51,   52,   53,   54, 1006,   56,
  61,   62,   63,   64,   65, 1027,
```

6.5.5 Matrix: addition of a scalar

Returns the sum of matrix matA and scalar b, applied to each coefficient of matA. The coefficients of matA and b need to be of the same type. The returned matrix is of the same type as matA. Special rules apply for mixing real and complex matrices and real and complex scalars.

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf()
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableA6x6", ""); A.show("A")
A:
11, 12, 13, 14, 15, 16,
21, 22, 23, 24, 25, 26,
31, 32, 33, 34, 35, 36,
41, 42, 43, 44, 45, 46,
51, 52, 53, 54, 55, 56,
61, 62, 63, 64, 65, 66,
>>> B = A + 15;  B.show("B")
B:
26, 27, 28, 29, 30, 31,
36, 37, 38, 39, 40, 41,
46, 47, 48, 49, 50, 51,
56, 57, 58, 59, 60, 61,
66, 67, 68, 69, 70, 71,
76, 77, 78, 79, 80, 81,
```

6.5.6 General matrix subtraction

Returns the difference of matrix matA and matrix matB. matA and matB need to be of the same type and need to have the same dimensions. The returned matrix is of the same type as matA. Special rules apply for mixing real and complex matrices.

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf()
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableA6x6", ""); A.show("A")
A:
11, 12, 13, 14, 15, 16,
21, 22, 23, 24, 25, 26,
31, 32, 33, 34, 35, 36,
41, 42, 43, 44, 45, 46,
51, 52, 53, 54, 55, 56,
61, 62, 63, 64, 65, 66,
>>> B = ctx.read_from_sqlite(mp14.dbpath(), "DecTableB6x6", ""); B.show("B")
```

(continues on next page)

(continued from previous page)

```
B:
911, 912, 913, 914, 915, 916,
921, 922, 923, 924, 925, 926,
931, 932, 933, 934, 935, 936,
941, 942, 943, 944, 945, 946,
951, 952, 953, 954, 955, 956,
961, 962, 963, 964, 965, 966,
>>> C = A - B; C.show("C")
C:
-900, -900, -900, -900, -900, -900,
-900, -900, -900, -900, -900, -900,
-900, -900, -900, -900, -900, -900,
-900, -900, -900, -900, -900, -900,
-900, -900, -900, -900, -900, -900,
-900, -900, -900, -900, -900, -900,
```

6.5.7 Matrix: subtraction of a scalar

Returns the difference of matrix matA and scalar b, applied to each coefficient of matA. The coefficients of matA and b need to be of the same type. The returned matrix is of the same type as matA. Special rules apply for mixing real and complex matrices and real and complex scalars.

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf()
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableA6x6", ""); A.show("A")
A:
11, 12, 13, 14, 15, 16,
21, 22, 23, 24, 25, 26,
31, 32, 33, 34, 35, 36,
41, 42, 43, 44, 45, 46,
51, 52, 53, 54, 55, 56,
61, 62, 63, 64, 65, 66,
>>> B = A - 15;  B.show("B")
B:
-4, -3, -2, -1,  0,  1,
 6,  7,  8,  9, 10, 11,
16, 17, 18, 19, 20, 21,
26, 27, 28, 29, 30, 31,
36, 37, 38, 39, 40, 41,
46, 47, 48, 49, 50, 51,
```

6.5.8 General matrix multiplication (“gemm”)

See also Eigen [240].

In its general form, matrix multiplication takes the form $\boldsymbol{C} = \boldsymbol{AB}$, where $\boldsymbol{A}$ is a m-by-k matrix, $\boldsymbol{B}$ is a k-by-n matrix, and $\boldsymbol{C}$ is a m-by-n matrix. Also, the transposed or adjoined matrices of $\boldsymbol{A}$ and/or $\boldsymbol{B}$ are often directly used.

In the general form, no information regarding special properties of $\boldsymbol{A}$ and/or $\boldsymbol{B}$ is used. If such information is available, specialized forms of multiplication are often signifantly faster:

- if $\boldsymbol{A}$ or $\boldsymbol{B}$ is a triangular or diagonal matrix, or
- if the multiplication with the inverse of a square, triangular or diagonal matrix is desired, or
- if $\boldsymbol{B}$ is the transpose of $\boldsymbol{A}$.

In the canonical FORTRAN package BLAS, the BLAS Level 3 function ?gemm and the BLAS Level 2 function ?gemv handle this

kind of expression, with the scalars α β and the indicator variables TransA and TransB as additional parameters:

$$?\text{gemm} = \begin{cases} \alpha\boldsymbol{AB} + \beta\boldsymbol{C}, & \text{for TransA = 'N', TransB = 'N',} \\ \alpha\boldsymbol{AB}^T + \beta\boldsymbol{C}, & \text{for TransA = 'N', TransB = 'T',} \\ \alpha\boldsymbol{AB}^H + \beta\boldsymbol{C}, & \text{for TransA = 'N', TransB = 'C',} \\ \alpha\boldsymbol{A}^T\boldsymbol{B} + \beta\boldsymbol{C}, & \text{for TransA = 'T', TransB = 'N',} \\ \alpha\boldsymbol{A}^T\boldsymbol{B}^T + \beta\boldsymbol{C}, & \text{for TransA = 'T', TransB = 'T',} \\ \alpha\boldsymbol{A}^T\boldsymbol{B}^H + \beta\boldsymbol{C}, & \text{for TransA = 'T', TransB = 'C',} \\ \alpha\boldsymbol{A}^H\boldsymbol{B} + \beta\boldsymbol{C}, & \text{for TransA = 'C', TransB = 'N',} \\ \alpha\boldsymbol{A}^H\boldsymbol{B}^T + \beta\boldsymbol{C}, & \text{for TransA = 'C', TransB = 'T',} \\ \alpha\boldsymbol{A}^H\boldsymbol{B}^H + \beta\boldsymbol{C}, & \text{for TransA = 'C', TransB = 'C',} \end{cases}$$

$$?\text{gemv} = \begin{cases} \alpha\boldsymbol{Ax} + \beta\boldsymbol{y}, & \text{for TransA = 'N',} \\ \alpha\boldsymbol{A}^T\boldsymbol{x} + \beta\boldsymbol{y}, & \text{for TransA = 'T',} \\ \alpha\boldsymbol{A}^H\boldsymbol{x} + \beta\boldsymbol{y}, & \text{for TransA = 'C'.} \end{cases}$$

We use the `transpose()` and `adjoint()` properties to compute these expressions efficiently. Here are some examples with real matrices:

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf()
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableA6x6", ""); A.show("A")
A:
11, 12, 13, 14, 15, 16,
21, 22, 23, 24, 25, 26,
31, 32, 33, 34, 35, 36,
41, 42, 43, 44, 45, 46,
51, 52, 53, 54, 55, 56,
61, 62, 63, 64, 65, 66,
>>> B = ctx.read_from_sqlite(mp14.dbpath(), "DecTableB6x6", ""); B.show("B")
B:
911, 912, 913, 914, 915, 916,
921, 922, 923, 924, 925, 926,
931, 932, 933, 934, 935, 936,
941, 942, 943, 944, 945, 946,
951, 952, 953, 954, 955, 956,
961, 962, 963, 964, 965, 966,
>>> C = A * B; C.show("C")
C:
 75991,  76072,  76153,  76234,  76315,  76396,
132151, 132292, 132433, 132574, 132715, 132856,
188311, 188512, 188713, 188914, 189115, 189316,
244471, 244732, 244993, 245254, 245515, 245776,
300631, 300952, 301273, 301594, 301915, 302236,
356791, 357172, 357553, 357934, 358315, 358696,

>>> C = A.transpose() * B;  C.show("C")
C:
203926, 204142, 204358, 204574, 204790, 205006,
209542, 209764, 209986, 210208, 210430, 210652,
215158, 215386, 215614, 215842, 216070, 216298,
220774, 221008, 221242, 221476, 221710, 221944,
226390, 226630, 226870, 227110, 227350, 227590,
232006, 232252, 232498, 232744, 232990, 233236,

>>> C = A * B.transpose();  C.show("C")
C:
 74011,  74821,  75631,  76441,  77251,  78061,
128821, 130231, 131641, 133051, 134461, 135871,
183631, 185641, 187651, 189661, 191671, 193681,
238441, 241051, 243661, 246271, 248881, 251491,
```

(continues on next page)

(continued from previous page)

```
293251, 296461, 299671, 302881, 306091, 309301,
348061, 351871, 355681, 359491, 363301, 367111,
```

Here are some examples with complex matrices:

```
>>> TName = "DecCplxTableA6x6"; Query = "where row<4 and col<4"
>>> A = ctx.read_from_sqlite(mp14.dbpath(), TName, Query); A.show("A")
A:
11 + 31j, 12 + 32j, 13 + 33j, 14 + 34j,
21 + 41j, 22 + 42j, 23 + 43j, 24 + 44j,
31 + 51j, 32 + 52j, 33 + 53j, 34 + 54j,
41 + 61j, 42 + 62j, 43 + 63j, 44 + 64j,


>>> TName = "DecCplxTableB6x6"; Query = "where row<4 and col<4"
>>> B = ctx.read_from_sqlite(mp14.dbpath(), TName, Query); B.show("B")
B:
45 + 7.5j, 2.9 + 36j,  11 + 13j,  37 + 37j,
 13 + 29j,  38 + 41j,  22 + 44j,  28 + 20j,
32 + 9.0j,  42 + 49j,  47 + 11j,  32 + 49j,
 34 + 42j, 6.0 + 16j,  20 + 38j,  22 + 17j,

>>> C = A.adjoint() * B;  C.show("C")
C:
7596.5 - 2941.5j,  8649.9 - 723.9j,     7946 - 1894j,     8392 - 2226j,
7808.0 - 2978.0j,  8880.8 - 670.8j,     8152 - 1888j,     8634 - 2222j,
8019.5 - 3014.5j,  9111.7 - 617.7j,     8358 - 1882j,     8876 - 2218j,
8231.0 - 3051.0j,  9342.6 - 564.6j,     8564 - 1876j,     9118 - 2214j,

>>> C = B.adjoint() * A;  C.show("C")
C:
7596.5 + 2941.5j, 7808.0 + 2978.0j, 8019.5 + 3014.5j, 8231.0 + 3051.0j,
 8649.9 + 723.9j,  8880.8 + 670.8j,  9111.7 + 617.7j,  9342.6 + 564.6j,
    7946 + 1894j,     8152 + 1888j,     8358 + 1882j,     8564 + 1876j,
    8392 + 2226j,     8634 + 2222j,     8876 + 2218j,     9118 + 2214j,


>>> C = A * B.adjoint();  C.show("C")
C:
 4262.3 + 1907.3j,      5620 + 1634j,  5791.0 + 3459.0j,  4660.0 + 1268.0j,
 6156.3 + 1931.3j,      7970 + 1304j,  8501.0 + 3809.0j,   6610.0 + 958.0j,
 8050.3 + 1955.3j,      10320 + 974j, 11211.0 + 4159.0j,   8560.0 + 648.0j,
 9944.3 + 1979.3j,      12670 + 644j, 13921.0 + 4509.0j,  10510.0 + 338.0j,

>>> C = B * A.adjoint();  C.show("C")
C:
 4262.3 - 1907.3j,  6156.3 - 1931.3j,  8050.3 - 1955.3j,  9944.3 - 1979.3j,
     5620 - 1634j,      7970 - 1304j,      10320 - 974j,      12670 - 644j,
 5791.0 - 3459.0j,  8501.0 - 3809.0j, 11211.0 - 4159.0j, 13921.0 - 4509.0j,
 4660.0 - 1268.0j,   6610.0 - 958.0j,   8560.0 - 648.0j,  10510.0 - 338.0j,
```

6.5.9 Arithmetic comparisons with a scalar or a matrix

`ctx.mat_count`(*matA*, *query*, *comparator*)

Returns the number of coefficients in matrix matA which are greater than the corresponding coefficients in matrix matB.

Writing `matA.count(query, comparator)` has the same effect.

Queries are: ">, <, >=, <=, !=, ==", For complex matrices, the absolute values are compared

```
>>> from xlcalcnet import *
>>> mpm.dps = 40;
>>> A = mp14.xrf().read_from_sqlite(mp14.dbpath(), "MpfrTableA4x4", "")
>>> B = mp14.xrf().read_from_sqlite(mp14.dbpath(), "MpfrTableB4x4", "")
```

6.6 Descriptive Statistics

6.6.1 Partial Sum

`ctx.mat_sum`(*mat*, *partialmode*)

Calculates the PartialSum. Writing `matA.sum(partialmode)` has the same effect.

Here partialmode is set as follows: 1 for full matrix calculation, 2 for rowwise calculation, 3 for columnwise calculation.

See also: Eigen [237].

6.6.2 Partial Product

`ctx.mat_prod`(*matA*, *partialmode*)

Calculates the PartialProd. Writing `matA.prod(partialmode)` has the same effect.

Here partialmode is set as follows: 1 for full matrix calculation, 2 for rowwise calculation, 3 for columnwise calculation.

See also: Eigen [237].

6.6.3 Partial Arithmetic Mean

`ctx.mat_mean`(*matA*, *partialmode*)

Calculates the PartialMean. Writing `matA.mean(partialmode)` has the same effect.

Here partialmode is set as follows: 1 for full matrix calculation, 2 for rowwise calculation, 3 for columnwise calculation.

See also: Eigen [237].

6.6.4 Partial Minimal Coefficient

`ctx.mat_min_coeff`(*matA*, *partialmode*)

Calculates the PartialMinCoeff. Writing `matA.min_coeff(partialmode)` has the same effect.

Here partialmode is set as follows: 1 for full matrix calculation, 2 for rowwise calculation, 3 for columnwise calculation.

See also: Eigen [237].

6.6.5 Partial Maximal Coefficient

`ctx.mat_max_coeff`(*matA*, *partialmode*)

Calculates the PartialMaxCoeff. Writing `matA.max_coeff(partialmode)` has the same effect.

Here partialmode is set as follows: 1 for full matrix calculation, 2 for rowwise calculation, 3 for columnwise calculation.

See also: Eigen [237].

6.6.6 Trace

`ctx.mat_trace`(*matA*)

Returns the trace of the matrix A. Writing `matA.Trace()` has the same effect.

See also: Eigen [237], Wikipedia [1386].

6.6.7 Partial Squared Norm

`ctx.mat_squared_norm(`*matA*, *partialmode*`)`

Calculates the PartialSquaredNorm. Writing `matA.PartialSquaredNorm(partialmode)` has the same effect.

Here partialmode is set as follows: 1 for full matrix calculation, 2 for rowwise calculation, 3 for columnwise calculation.

See also: Eigen [237].

6.6.8 Partial Norm

`ctx.mat_norm(`*matA*, *partialmode*`)`

Calculates the PartialNorm. Writing `matA.PartialNorm(partialmode)` has the same effect.

Here partialmode is set as follows: 1 for full matrix calculation, 2 for rowwise calculation, 3 for columnwise calculation.

See also: Eigen [237].

6.6.9 Partial Stable Norm

`ctx.mat_stable_norm(`*matA*, *partialmode*`)`

Calculates the PartialStableNorm. Writing `matA.PartialStableNorm(partialmode)` has the same effect.

Here partialmode is set as follows: 1 for full matrix calculation, 2 for rowwise calculation, 3 for columnwise calculation.

See also: Eigen [237].

6.6.10 Covariance matrix

`ctx.mat_covariance(`*matA*`)`

Calculates the covariance matrix. Writing `matA.Covariance()` has the same effect.

See also: Wikipedia [1382], Wikipedia [1362].

6.6.11 Correlation matrix

`ctx.mat_correlation(`*matA*`)`

Calculates the correlation matrix. Writing `matA.Correlation_mat()` has the same effect.

See also: Wikipedia [1360].

6.7 Standard decompositions and linear solving

6.7.1 Cholesky Decomposition with Pivoting

`ctx.mat_ldlt`(*matA*, *Query*, *matB*)

Returns the Cholesky decomposition of the symmetric matrix *matA* $= A = A = P^T LDLP$, with partial pivoting.

Writing `matA.LDLT(Query, matB)` has the same effect

See also Eigen [230], Wikipedia [1418], Wikipedia [1423].

Parameters:

Query
Required. A string specifying which items of the result section should be computed.

B
Optional. A general n-by-m matrix of the same type as A. You need to specify B only if you want to solve the linear equation $AX = B$

Results:

info
An integer indicating whether the decomposition was successful (=0) or not(=1).

ispos
An integer indicating whether the matrix A is semidefinit positve (=0) or not(=1).

isneg
An integer indicating whether the matrix A is semidefinit negative (=0) or not(=1).

det
A scalar of a return type matching A. The determinant of A.

rcond
A scalar of the same return type as det. The condition number of A.

X
A general matrix of the same type and dimension as B. The solution to $AX = B$.

Inv
A square matrix of the same type and dimension as A. The inverse of A, A^{-1}.

P
A square matrix of the same type and dimension as A. The permutation matrix P in the decomposition $A = P^T LDLP$.

L
A square matrix of the same type and dimension as A, containing the matrix L in the decomposition $A = P^T LDLP$.

D
A square matrix of the same type and dimension as A, containing the matrix D in the decomposition $A = P^T LDLP$.

Perform a robust Cholesky decomposition of a positive semidefinite or negative semidefinite matrix such that $A = P^T LDLP$, where P is a permutation matrix, L is lower triangular with a unit diagonal and D is a diagonal matrix. The decomposition uses pivoting to ensure stability, so that L will have zeros in the bottom right rank(A) - n submatrix. Avoiding the square root on D also stabilizes the computation. Remember that Cholesky decompositions are not rank-revealing. Also, do not use a Cholesky decomposition to determine whether a system of equations has a solution

rankUpdate: Update the LDLT decomposition: given $A = LDLT$, efficiently compute the decomposition of $A+\sigma ww^T$. Parameters: w a vector to be incorporated into the decomposition. σ a scalar, +1 for updates and -1 for "downdates", which correspond to removing previously-added column vectors. Optional; default value is +1.

solve: Returns a solution x of $Ax = b$ using the current decomposition of A. This function also supports in-place solves using the syntax x = decompositionObject.solve(x) .

This method just tries to find as good a solution as possible. If you want to check whether a solution exists or if it is accurate, just call this function to get a result and then compute the error of this result, or use MatrixBase::isApprox() directly, for instance like this:

bool a solution exists = (A*result).isApprox(b, precision);

This method avoids dividing by zero, so that the non-existence of a solution does not by itself mean that you will get inf or nan values.

More precisely, this method solves $Ax = b$ using the decomposition $A = P^T LDL * P$ by solving the systems

$P^T y1 = b, LY2 = y1, Dy3 = y2, L * y4 = y3$ and $Px = y4$ in succession.

If the matrix A is singular, then D will also be singular (all the other matrices are invertible). In that case, the least-square solution of $Dy3 = y2$ is computed. This does not mean that this function computes the least-square solution of $Ax = b$ if A is singular.

6.7.1.1 Example for a real symmetric matrix

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableRandomSAA6x6", ""); A.show("A")

>>> # This needs to be a positive definite matrix
A:
44.9, 25.5, 50.0, 47.9, 26.4, 62.0,
25.5, 24.3, 49.1, 95.0, 29.0, 46.6,
50.0, 49.1, 55.5, 84.0, 44.4, 26.7,
47.9, 95.0, 84.0, 64.5, 39.5, 87.5,
26.4, 29.0, 44.4, 39.5, 39.8, 12.3,
62.0, 46.6, 26.7, 87.5, 12.3, 85.0,

>>> B = ctx.read_from_sqlite(mp14.dbpath(), "DecTableB6x6", ""); B.show("B")
B:
911, 912, 913, 914, 915, 916,
921, 922, 923, 924, 925, 926,
931, 932, 933, 934, 935, 936,
941, 942, 943, 944, 945, 946,
951, 952, 953, 954, 955, 956,
961, 962, 963, 964, 965, 966,

>>> Query = "ispos, isneg, info, rcond, L, U, D, P, X, Inverse"
>>> Res = A.eigen_ldlt2(Query, B)
>>> print("Info : ", Res["Info"])
Info :  0
>>> print("Rcond: ", Res["Rcond"])
Rcond:  0.0073622045623195067245064838163673064
>>> print("Ispos: ", Res["Ispos"])
Ispos:  False
>>> print("Isneg: ", Res["Isneg"])
Isneg:  False

>>> Res["X"].show("X")
X:
 -7.46,  -7.47,  -7.48,  -7.48,  -7.49,  -7.50,
 -4.07,  -4.07,  -4.08,  -4.08,  -4.09,  -4.09,
 -25.5,  -25.5,  -25.6,  -25.6,  -25.6,  -25.6,
-0.158, -0.158, -0.158, -0.158, -0.158, -0.158,
  54.5,   54.5,   54.6,   54.6,   54.7,   54.7,
  19.3,   19.3,   19.3,   19.3,   19.4,   19.4,

>>> (A * Res["X"]).show("A * X")
```

(continues on next page)

(continued from previous page)

```
A * X:
911, 912, 913, 914, 915, 916,
921, 922, 923, 924, 925, 926,
931, 932, 933, 934, 935, 936,
941, 942, 943, 944, 945, 946,
951, 952, 953, 954, 955, 956,
961, 962, 963, 964, 965, 966,

>>> (B - A * Res["x"]).show("B - A * X")
B - A * X:
       0,        0,   -2E-32,   -1E-32,   -1E-32,    1E-32,
 1.6E-32,    4E-33,    9E-33,   -9E-33,  2.0E-32,  2.4E-32,
 1.7E-32,  1.3E-32,    6E-33, -1.0E-32,  2.5E-32,    8E-33,
  -2E-32,   -1E-32,   -3E-32,   -3E-32,   -1E-32,   -2E-32,
  -2E-33,   -3E-33,        0,   -8E-33,    6E-33,    4E-33,
   2E-33,  1.4E-32, -1.4E-32,   -9E-33,  1.1E-32,    5E-33,

>>> Res["P"].T.show("P^T")
P^T:
0, 0, 0, 1, 0, 0,
0, 0, 0, 0, 0, 1,
0, 0, 1, 0, 0, 0,
0, 1, 0, 0, 0, 0,
0, 0, 0, 0, 1, 0,
1, 0, 0, 0, 0, 0,

>>> Res["L"].show("L")
L:
      1,       0,       0,       0,       0,       0,
   1.03,       1,       0,       0,       0,       0,
  0.314,   -2.21,       1,       0,       0,       0,
  0.729,   0.623, -0.0271,       1,       0,       0,
  0.145,   -1.05,   0.580,   0.362,       1,       0,
  0.548,   -1.84,   0.805,   -3.59,   0.514,       1,

>>> Res["D"].show("D")
D:
 85.0,     0,     0,     0,     0,     0,
    0, -25.6,     0,     0,     0,     0,
    0,     0,   172,     0,     0,     0,
    0,     0,     0,  9.46,     0,     0,
    0,     0,     0,     0,  6.99,     0,
    0,     0,     0,     0,     0,  -150,

>>> Res["U"].show("U")
U:
      1,    1.03,   0.314,   0.729,   0.145,   0.548,
      0,       1,   -2.21,   0.623,   -1.05,   -1.84,
      0,       0,       1, -0.0271,   0.580,   0.805,
      0,       0,       0,       1,   0.362,   -3.59,
      0,       0,       0,       0,       1,   0.514,
      0,       0,       0,       0,       0,       1,

>>> Res["P"].show("P")
P:
0, 0, 0, 0, 0, 1,
0, 0, 0, 1, 0, 0,
0, 0, 1, 0, 0, 0,
1, 0, 0, 0, 0, 0,
0, 0, 0, 0, 1, 0,
0, 1, 0, 0, 0, 0,

>>> (A - Res["P"].T * Res["L"]  * Res["D"] * Res["U"] * Res["P"]).show("A - P^T * L * D * U * P")
A - P^T * L * D * U * P:
     0,      0,      0,      0,      0,      0,
     0,      0, -1E-34, -1E-34, -1E-34,      0,
```

(continues on next page)

(continued from previous page)

```
     0,      0,      0, -1E-34,  1E-34,      0,
     0, -1E-34, -1E-34,      0,      0,  3E-34,
     0,      0,  2E-34,      0,      0,      0,
     0,      0,      0,  3E-34,      0,      0,

>>> Res["Inverse"].show("Inverse")
Inverse:
  0.0293,  -0.0252,   0.0436, -0.00894,  -0.0389, -0.00643,
 -0.0252, -0.00666,  0.00269,   0.0130,  0.00342,  0.00733,
  0.0436,  0.00269,   0.0547,  0.00851,  -0.0859,  -0.0468,
-0.00894,   0.0130,  0.00851, -0.00235,  -0.0109, 0.000736,
 -0.0389,  0.00342,  -0.0859,  -0.0109,    0.141,   0.0442,
-0.00643,  0.00733,  -0.0468, 0.000736,   0.0442,   0.0200,

>>> (A * Res["Inverse"]).show("A * Inverse")
A * Inverse:
     1.00,    -5E-36,     1E-35,   1.1E-36,     2E-35,    -1E-35,
  1.1E-35,      1.00,     2E-35,  -4.9E-36,    -6E-35,   1.1E-35,
  3.9E-35,    -1E-36,      1.00,  -2.1E-36,  -1.0E-34,  -2.1E-35,
 -2.8E-35,    -1E-36,    -2E-35,      1.00,     5E-35,     1E-35,
 2.16E-35,   1.6E-36,   2.5E-35, -5.17E-36,      1.00,  -1.2E-35,
   -1E-36,     5E-36,         0,  -1.6E-36,    -1E-35,      1.00,
```

6.7.1.2 Example for a hermitian matrix

```
>>> from xlcalcnet import *
>>> ctx = mp14.dcf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecCplxTableRandomSAPosDefA6x6", "")
>>> A = A.top_left_corner(4,4); A.show("A")

>>> # This needs to be a self-adjoint, positive definite matrix
A:
   91.0 + 0j, 12.0 - 3.60j, 22.0 - 7.40j, 14.0 + 1.10j,
12.0 + 3.60j,    77.0 + 0j, 2.50 - 2.00j, 3.40 - 7.60j,
22.0 + 7.40j, 2.50 + 2.00j,    91.0 + 0j, 17.0 + 3.70j,
14.0 - 1.10j, 3.40 + 7.60j, 17.0 - 3.70j,    74.0 + 0j,

>>> B = ctx.read_from_sqlite(mp14.dbpath(), "DecCplxTableB6x6", "")
>>> B = B.top_left_corner(4,4); B.show("B")
B:
45.0 + 7.50j, 2.90 + 36.0j, 11.0 + 13.0j, 37.0 + 37.0j,
13.0 + 29.0j, 38.0 + 41.0j, 22.0 + 44.0j, 28.0 + 20.0j,
32.0 + 9.00j, 42.0 + 49.0j, 47.0 + 11.0j, 32.0 + 49.0j,
34.0 + 42.0j, 6.00 + 16.0j, 20.0 + 38.0j, 22.0 + 17.0j,

>>> Query = "ispos, isneg, info, rcond, L, U, D, P, X, Inverse"
>>> Res = A.eigen_ldlt2(Query, B)
>>> print("Info : ", Res["Info"])
Info :  0 + 0j
>>> print("Rcond: ", Res["Rcond"])
Rcond:  0.41520387595592569380609948826249956 9 + 0j
>>> print("Ispos: ", Res["Ispos"])
Ispos:  False
>>> print("Isneg: ", Res["Isneg"])
Isneg:  False

>>> Res["X"].show("X")
X:
    0.376 - 0.0288j,     -0.222 + 0.281j,   -0.0865 + 0.0417j,      0.229 + 0.303j,
    0.0290 + 0.383j,      0.511 + 0.498j,      0.227 + 0.583j,      0.309 + 0.210j,
    0.219 - 0.0602j,      0.535 + 0.463j,    0.527 - 0.00173j,      0.288 + 0.417j,
     0.379 + 0.583j, 0.000510 + 0.00479j,      0.214 + 0.481j,     0.170 + 0.0528j,

>>> (A * Res["X"]).show("A * X")
```

(continues on next page)

(continued from previous page)

```
A * X:
45.0 + 7.50j, 2.90 + 36.0j, 11.0 + 13.0j, 37.0 + 37.0j,
13.0 + 29.0j, 38.0 + 41.0j, 22.0 + 44.0j, 28.0 + 20.0j,
32.0 + 9.00j, 42.0 + 49.0j, 47.0 + 11.0j, 32.0 + 49.0j,
34.0 + 42.0j, 6.00 + 16.0j, 20.0 + 38.0j, 22.0 + 17.0j,

>>> (B - A * Res["x"]).show("B - A * X")
B - A * X:
        0 - 5.00E-35j,        -1.80E-34 + 0j,               0 + 0j,               0 + 0j,
              0 + 0j, -1.00E-34 - 1.00E-34j,         0 - 2.00E-34j,         0 - 1.00E-34j,
              0 + 0j,         0 - 1.00E-34j,               0 + 0j,               0 + 0j,
-1.00E-34 + 1.00E-34j,        -1.00E-35 + 0j,         0 - 1.00E-34j, -1.00E-34 - 1.00E-34j,

>>> Res["P"].T.show("P^T")
P^T:
1.00 + 0j,    0 + 0j,    0 + 0j,    0 + 0j,
   0 + 0j,    0 + 0j, 1.00 + 0j,    0 + 0j,
   0 + 0j, 1.00 + 0j,    0 + 0j,    0 + 0j,
   0 + 0j,    0 + 0j,    0 + 0j, 1.00 + 0j,

>>> Res["L"].show("L")
L:
         1.00 + 0j,             0 + 0j,             0 + 0j,             0 + 0j,
   0.242 + 0.0813j,          1.00 + 0j,             0 + 0j,             0 + 0j,
   0.132 + 0.0396j, -0.00815 - 0.0223j,          1.00 + 0j,             0 + 0j,
   0.154 - 0.0121j,    0.161 - 0.0270j,    0.0220 + 0.106j,          1.00 + 0j,

>>> Res["D"].show("D")
D:
91.0 + 0j,    0 + 0j,    0 + 0j,    0 + 0j,
   0 + 0j, 85.1 + 0j,    0 + 0j,    0 + 0j,
   0 + 0j,    0 + 0j, 75.2 + 0j,    0 + 0j,
   0 + 0j,    0 + 0j,    0 + 0j, 68.7 + 0j,

>>> Res["U"].show("U")
U:
         1.00 + 0j,    0.242 - 0.0813j,    0.132 - 0.0396j,    0.154 + 0.0121j,
            0 + 0j,          1.00 + 0j, -0.00815 + 0.0223j,    0.161 + 0.0270j,
            0 + 0j,             0 + 0j,          1.00 + 0j,    0.0220 - 0.106j,
            0 + 0j,             0 + 0j,             0 + 0j,          1.00 + 0j,

>>> Res["P"].show("P")
P:
1.00 + 0j,    0 + 0j,    0 + 0j,    0 + 0j,
   0 + 0j,    0 + 0j, 1.00 + 0j,    0 + 0j,
   0 + 0j, 1.00 + 0j,    0 + 0j,    0 + 0j,
   0 + 0j,    0 + 0j,    0 + 0j, 1.00 + 0j,

>>> (A - Res["P"].T * Res["L"]  * Res["D"] * Res["U"] * Res["P"]).show("A - P^T * L * D * U * P")
A - P^T * L * D * U * P:
       0 + 0j,        0 + 0j,        0 + 0j,        0 + 0j,
       0 + 0j,        0 + 0j, 0 + 1.00E-35j, 0 + 2.00E-35j,
       0 + 0j,        0 + 0j,        0 + 0j,        0 + 0j,
       0 + 0j, 0 - 2.00E-35j,        0 + 0j,        0 + 0j,

>>> Res["Inverse"].show("Inverse")
Inverse:
   0.0122 - 1.00E-39j,  -0.00177 + 0.000794j,  -0.00259 + 0.000957j,  -0.00167 - 0.000490j,
 -0.00177 - 0.000794j,    0.0135 - 1.00E-40j, 0.000120 + 0.0000425j,  -0.000321 + 0.00154j,
 -0.00259 - 0.000957j, 0.000120 - 0.0000425j,    0.0121 + 2.60E-40j,  -0.00231 - 0.000373j,
 -0.00167 + 0.000490j,  -0.000321 - 0.00154j,  -0.00231 + 0.000373j,           0.0146 + 0j,

>>> (A * Res["Inverse"]).show("A * Inverse")
A * Inverse:
     1.00 - 1.20E-37j,  1.03E-36 - 2.00E-37j, -8.00E-37 + 1.30E-37j,               0 + 0j,
       -3.90E-37 + 0j,             1.00 + 0j,         6.00E-38 + 0j, -2.00E-37 + 1.00E-36j,
```

(continues on next page)

(continued from previous page)

```
-8.00E-37 - 1.00E-38j,  7.00E-38 - 1.00E-37j,      1.00 + 6.00E-38j,         1.00E-36 + 0j,
 1.00E-36 + 1.00E-37j,         0 + 1.00E-36j,         1.00E-36 + 0j,      1.00 - 5.00E-38j,
```

6.7.2 LU Decomposition with partial Pivoting

`ctx.mat_partial_piv_lu`(*matA*, *Query*, *matB*)

Returns the LU decomposition of the general square matrix *matA* $= A = PLU$, with partial pivoting.

Writing `matA.PartialPivLU(Query, matB)` has the same effect

See also Eigen [232], Wikipedia [1405], Wikipedia [1423].

Parameters:

Query
Required. A string specifying which items of the result section should be computed.

B
Optional. A general n-by-m matrix of the same type as A. You need to specify B only if you want to solve the linear equation $AX = B$

Results:

det
A scalar of a return type matching A. The determinant of A.

rcond
A scalar of the same return type as det. The condition number of A.

X
A general matrix of the same type and dimension as B. The solution to $AX = B$.

Inv
A square matrix of the same type and dimension as A. The inverse of A, A^{-1}.

P
A square matrix of the same type and dimension as A. The permutation matrix P in the decomposition $A = PLU$.

LU
A square matrix of the same type and dimension as A, containing the matrices L and U in the decomposition $A = PLU$.

This class represents a LU decomposition of a square invertible matrix, with partial pivoting: the matrix A is decomposed as A = PLU where L is unit-lower-triangular, U is upper-triangular, and P is a permutation matrix.

Typically, partial pivoting LU decomposition is only considered numerically stable for square invertible matrices. Thus LAPACK's dgesv and dgesvx require the matrix to be square and invertible. The present class does the same. It will assert that the matrix is square, but it won't (actually it cannot) check that the matrix is invertible: it is your task to check that you only use this decomposition on invertible matrices. The guaranteed safe alternative, working for all matrices, is the full pivoting LU decomposition, provided by class FullPivLU.

This is not a rank-revealing LU decomposition. Many features are intentionally absent from this class, such as rank computation. If you need these features, use class FullPivLU.

This LU decomposition is suitable to invert invertible matrices. It is what MatrixBase::inverse() uses in the general case. On the other hand, it is not suitable to determine whether a given matrix is invertible. The data of the LU decomposition can be directly accessed through the methods matrixLU(), permutationP().

6.7.2.1 Example for a real general square matrix (Python)

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableRandomA6x6", ""); A.show("A")

>>> # This needs to be a square matrix
```

(continues on next page)

(continued from previous page)

```
A:
  48,   43,   31,   19,   14,   24,
  46,   10,   20,  4.6,   14,   10,
  27,   39,   13,   34,   29,   37,
 7.1,   42,   15,  2.8,   35,   23,
  23,   50,   42, 0.44,   42,   23,
  12,   50,  1.2,   46,   36,   47,

>>> B = ctx.read_from_sqlite(mp14.dbpath(), "DecTableB6x6", ""); B.show("B")
B:
911, 912, 913, 914, 915, 916,
921, 922, 923, 924, 925, 926,
931, 932, 933, 934, 935, 936,
941, 942, 943, 944, 945, 946,
951, 952, 953, 954, 955, 956,
961, 962, 963, 964, 965, 966,

>>> Query = "rcond, det, LU, P, X, Inverse"
>>> Res = A.eigen_partialPivLu2(Query, B)
>>> print("Rcond: ", Res["Rcond"])
Rcond:  0.0027248962455782943842188862118634889 1
>>> print("Det  : ", Res["Det"])
Det  :  48772174.208000000000000000000000000005

>>> Res["X"].show("X")
X:
 21.6,  21.7,  21.7,  21.7,  21.7,  21.8,
 8.21,  8.22,  8.22,  8.23,  8.23,  8.24,
-20.5, -20.6, -20.6, -20.6, -20.6, -20.6,
-15.3, -15.3, -15.4, -15.4, -15.4, -15.4,
 16.9,  16.9,  17.0,  17.0,  17.0,  17.0,
 8.73,  8.76,  8.78,  8.80,  8.82,  8.85,

>>> (A * Res["X"]).show("A * X (should be equal to B)")
A * X (should be equal to B):
911, 912, 913, 914, 915, 916,
921, 922, 923, 924, 925, 926,
931, 932, 933, 934, 935, 936,
941, 942, 943, 944, 945, 946,
951, 952, 953, 954, 955, 956,
961, 962, 963, 964, 965, 966,

>>> (B - A * Res["x"]).show("B - A * X (should be a zero matrix)")
B - A * X (should be a zero matrix):
   2E-33,   -4E-33, -1.3E-32,    1E-33,   -1E-33,   -3E-33,
   3E-33,   -1E-33,   -2E-33,    4E-33,   -4E-33, -1.1E-32,
   3E-33,   -4E-33,   -3E-33,   -1E-33,   -2E-33,   -4E-33,
   1E-33,    0E-33,   -1E-33,   -1E-33,    1E-33,   -1E-33,
   2E-33,   -6E-33,   -2E-33,   -2E-33,    0E-33,   -5E-33,
   0E-33,   -2E-33,   -3E-33,   -1E-33,   -1E-33,   -2E-33,

>>> Res["P"].show("P")
P:
1, 0, 0, 0, 0, 0,
0, 0, 0, 0, 0, 1,
0, 0, 0, 0, 1, 0,
0, 0, 0, 1, 0, 0,
0, 1, 0, 0, 0, 0,
0, 0, 1, 0, 0, 0,

>>> L = Res["LU"].unit_lower_triangle(); L.show("L")
L:
      1,       0,       0,       0,       0,       0,
   0.25,       1,       0,       0,       0,       0,
  0.479,   0.749,       1,       0,       0,       0,
  0.148,   0.908,   0.510,       1,       0,       0,
```

(continues on next page)

(continued from previous page)

```
  0.958,  -0.795,  -0.465, -0.0452,       1,       0,
  0.563,   0.377, -0.0613,  -0.308,   0.282,       1,

>>> U = Res["LU"].upper_triangle(); U.show("U")
U:
   48,    43,    31,    19,    14,    24,
    0,  39.3, -6.55,  41.3,  32.5,  41.0,
    0,     0,  32.1, -39.6,  11.0, -19.2,
    0,     0,     0, -17.3, -2.17, -7.97,
    0,     0,     0,     0,  31.4,  10.3,
    0,     0,     0,     0,     0,  1.49,

>>> (Res["P"] * L * U).show("P * L * U (should be equal to A)")
P * L * U (should be equal to A):
 48.0,  43.0,  31.0,  19.0,  14.0,  24.0,
 27.0,  39.0,  13.0,  34.0,  29.0,  37.0,
 46.0,  10.0,  20.0,  4.60,  14.0,  10.0,
 7.10,  42.0,  15.0,  2.80,  35.0,  23.0,
 12.0,  50.0,  1.20,  46.0,  36.0,  47.0,
 23.0,  50.0,  42.0, 0.440,  42.0,  23.0,

>>> Res["Inverse"].show("Inverse of A")
Inverse of A:
 0.0113,  0.0426, -0.0633, 0.00768, -0.0128,  0.0375,
 0.0459,  0.0319,  -0.201, -0.0115,  0.0136,   0.127,
-0.0121, -0.0523,   0.129, -0.0340,  0.0322, -0.0835,
0.00719,  0.0757,  -0.283,  -0.141,  0.0901,   0.228,
-0.0289,  0.0940,  -0.220, -0.0636,  0.0627,   0.169,
-0.0363,  -0.190,   0.672,   0.198,  -0.148,  -0.473,

>>> (A * Res["Inverse"]).show("A * Inverse (should be an identity matrix)")
A * Inverse (should be an identity matrix):
    1.00,    0E-35,    0E-34,    0E-35,    0E-35,    0E-34,
  -8E-36,     1.00, -1.2E-34,    1E-35,   -1E-35,   -2E-35,
   0E-35,   -1E-35,     1.00,    0E-35,    0E-35,    1E-34,
   3E-36,    0E-35,    0E-34,     1.00,    2E-35,    1E-34,
   3E-36,   -1E-35,    0E-34,    0E-35,     1.00,    1E-34,
   1E-35,    1E-35,    0E-34,   -1E-35,    0E-35,     1.00,
```

6.7.2.2 Example for a complex matrix

```
>>> from xlcalcnet import *
>>> ctx = mp14.dcf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecCplxTableB6x6", "")
>>> A = A.top_left_corner(4,4); A.show("A")

>>> # This needs to be an invertible matrix
A:
45.0 + 7.50j, 2.90 + 36.0j, 11.0 + 13.0j, 37.0 + 37.0j,
13.0 + 29.0j, 38.0 + 41.0j, 22.0 + 44.0j, 28.0 + 20.0j,
32.0 + 9.00j, 42.0 + 49.0j, 47.0 + 11.0j, 32.0 + 49.0j,
34.0 + 42.0j, 6.00 + 16.0j, 20.0 + 38.0j, 22.0 + 17.0j,

>>> B = ctx.read_from_sqlite(mp14.dbpath(), "DecCplxTableA6x6", "")
>>> B = B.top_left_corner(4,4); B.show("B")
B:
11.0 + 31.0j, 12.0 + 32.0j, 13.0 + 33.0j, 14.0 + 34.0j,
21.0 + 41.0j, 22.0 + 42.0j, 23.0 + 43.0j, 24.0 + 44.0j,
31.0 + 51.0j, 32.0 + 52.0j, 33.0 + 53.0j, 34.0 + 54.0j,
41.0 + 61.0j, 42.0 + 62.0j, 43.0 + 63.0j, 44.0 + 64.0j,

>>> Query = "rcond, det, LU, P, X, Inverse"
>>> Res = A.eigen_partialPivLu2(Query, B)
>>> print("Rcond: ", Res["Rcond"])
```

(continues on next page)

(continued from previous page)

```
Rcond:  0.018712448036456211456272670465202252 6 0j
>>> print("Det  : ", Res["Det"])
Det  :  1083952.900000000000000000000000000002 - 676519.300000000000000000000000000002j

>>> Res["X"].show("X")
X:
-0.869 - 3.37j, -0.858 - 3.37j, -0.846 - 3.38j, -0.835 - 3.38j,
 -1.82 - 3.22j,  -1.82 - 3.22j,  -1.82 - 3.23j,  -1.81 - 3.23j,
  2.15 + 3.53j,   2.15 + 3.53j,   2.16 + 3.53j,   2.16 + 3.53j,
  1.81 + 3.52j,   1.82 + 3.53j,   1.84 + 3.54j,   1.86 + 3.55j,

>>> (A * Res["X"]).show("A * X (should be equal to B)")
A * X (should be equal to B):
11.0 + 31.0j, 12.0 + 32.0j, 13.0 + 33.0j, 14.0 + 34.0j,
21.0 + 41.0j, 22.0 + 42.0j, 23.0 + 43.0j, 24.0 + 44.0j,
31.0 + 51.0j, 32.0 + 52.0j, 33.0 + 53.0j, 34.0 + 54.0j,
41.0 + 61.0j, 42.0 + 62.0j, 43.0 + 63.0j, 44.0 + 64.0j,

>>> (B - A * Res["x"]).show("B - A * X (should be a zero matrix)")
B - A * X (should be a zero matrix):
       -1.00E-34 + 0j, -2.00E-34 - 2.00E-33j,         1.00E-33 + 0j,  1.20E-33 - 2.00E-33j,
 3.50E-33 - 1.00E-33j,        -1.20E-33 + 0j, -6.00E-34 - 2.00E-33j,  6.00E-34 - 2.00E-33j,
 1.00E-33 - 1.00E-33j, -1.00E-33 - 1.00E-33j,         0 - 3.00E-33j,         0 - 1.00E-33j,
 1.40E-33 - 1.00E-33j,        -1.00E-34 + 0j,                0 + 0j,         3.00E-34 + 0j,

>>> Res["P"].show("P")
P:
   0 + 0j,    0 + 0j,    0 + 0j, 1.00 + 0j,
   0 + 0j,    0 + 0j, 1.00 + 0j,    0 + 0j,
1.00 + 0j,    0 + 0j,    0 + 0j,    0 + 0j,
   0 + 0j, 1.00 + 0j,    0 + 0j,    0 + 0j,

>>> L = Res["LU"].unit_lower_triangle(); L.show("L")
L:
      1.00 + 0j,          0 + 0j,          0 + 0j,          0 + 0j,
 0.502 - 0.355j,       1.00 + 0j,          0 + 0j,          0 + 0j,
 0.632 - 0.560j,  0.314 + 0.471j,       1.00 + 0j,          0 + 0j,
 0.568 + 0.151j,  0.866 - 0.190j, -0.137 - 0.755j,       1.00 + 0j,

>>> U = Res["LU"].upper_triangle(); U.show("U")
U:
 34.0 + 42.0j,  6.00 + 16.0j,  20.0 + 38.0j,  22.0 + 17.0j,
       0 + 0j,  33.3 + 43.1j, 23.4 - 0.968j,  14.9 + 48.3j,
       0 + 0j,        0 + 0j, -30.7 - 10.6j,  31.7 + 16.4j,
       0 + 0j,        0 + 0j,        0 + 0j, -12.0 - 5.80j,

>>> (Res["P"] * L * U).show("P * L * U (should be equal to A)")
P * L * U (should be equal to A):
13.0 + 29.0j, 38.0 + 41.0j, 22.0 + 44.0j, 28.0 + 20.0j,
45.0 + 7.50j, 2.90 + 36.0j, 11.0 + 13.0j, 37.0 + 37.0j,
34.0 + 42.0j, 6.00 + 16.0j, 20.0 + 38.0j, 22.0 + 17.0j,
32.0 + 9.00j, 42.0 + 49.0j, 47.0 + 11.0j, 32.0 + 49.0j,

>>> Res["Inverse"].show("Inverse of A")
Inverse of A:
   0.0516 + 0.0468j,    0.0667 - 0.0273j, -0.0516 + 0.000462j,   -0.0635 - 0.0282j,
   0.0449 + 0.0423j,    0.0801 - 0.0400j, -0.0447 + 0.000795j,  -0.0814 - 0.00721j,
  -0.0583 - 0.0458j,   -0.0783 + 0.0245j,   0.0599 + 0.00584j,    0.0786 + 0.0125j,
  -0.0338 - 0.0465j,   -0.0674 + 0.0325j,    0.0409 - 0.0104j,    0.0738 + 0.0219j,

>>> (A * Res["Inverse"]).show("A * Inverse (should be an identity matrix)")
A * Inverse (should be an identity matrix):
     1.00 - 1.00E-35j, -2.00E-35 + 2.00E-35j,  1.00E-35 + 1.00E-35j,  1.00E-35 + 1.00E-35j,
-2.60E-35 - 3.00E-35j,      1.00 + 1.00E-36j,         0 - 1.10E-35j,                0 + 0j,
-2.00E-35 - 2.00E-35j, -1.00E-35 + 4.00E-35j,      1.00 - 1.00E-35j,  1.00E-35 + 1.00E-35j,
 3.00E-36 - 1.00E-35j, -1.00E-35 - 1.10E-35j,         0 + 2.00E-36j,      1.00 + 1.00E-35j,
```

6.7.3 LU Decomposition with full Pivoting

`ctx.mat_full_piv_lu`(*matA*, *Query*, *matB*)

Returns the LU decomposition of the general square matrix *matA* $= A = PLUQ$, with full pivoting. See also Eigen [224], Wikipedia [1419], Wikipedia [1423].

Writing `matA.FullPivLU(Query, matB)` has the same effect

Parameters:

Query
Required. A string specifying which items of the result section should be computed.

B
Optional. A general n-by-m matrix of the same type as A. You need to specify B only if you want to solve the linear equation $AX = B$

Results:

isinjective
An boolean value indicating whether A is injective.

isinvertible
An boolean value indicating whether A is invertible.

issurjective
An boolean value indicating whether A is surjective.

rank
An integer. The rank of A.

det
A scalar of a return type matching A. The determinant of A.

rcond
A scalar of the same return type as det. The condition number of A.

X
A general matrix of the same type and dimension as B. The solution to $AX = B$.

Inv
A square matrix of the same type and dimension as A. The inverse of A, A^{-1}.

P
A square matrix of the same type and dimension as A. The permutation matrix P in the decomposition $A = PLUQ$.

Q
A square matrix of the same type and dimension as A. The permutation matrix Q in the decomposition $A = PLUQ$.

LU
A square matrix of the same type and dimension as A, containing the matrices L and U in the decomposition $A = PLUQ$.

This class represents a LU decomposition of any matrix, with complete pivoting: the matrix A is decomposed as $A = PLUQ$ where L is unit-lower-triangular, U is upper-triangular, and P and Q are permutation matrices. This is a rank-revealing LU decomposition. The eigenvalues (diagonal coefficients) of U are sorted in such a way that any zeros are at the end.

This decomposition provides the generic approach to solving systems of linear equations, computing the rank, invertibility, inverse, kernel, and determinant. This LU decomposition is very stable and well tested with large matrices. However there are use cases where the SVD decomposition is inherently more stable and/or flexible. For example, when computing the kernel of a matrix, working with the SVD allows to select the smallest singular values of the matrix, something that the LU decomposition doesn't see.

6.7.3.1 Example for a real matrix

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableRandomA6x6", ""); A.show("A")

>>> # This needs to be a square matrix
A:
  48,   43,   31,   19,   14,   24,
  46,   10,   20,  4.6,   14,   10,
  27,   39,   13,   34,   29,   37,
 7.1,   42,   15,  2.8,   35,   23,
  23,   50,   42, 0.44,   42,   23,
  12,   50,  1.2,   46,   36,   47,

>>> B = ctx.read_from_sqlite(mp14.dbpath(), "DecTableB6x6", ""); B.show("B")
B:
911, 912, 913, 914, 915, 916,
921, 922, 923, 924, 925, 926,
931, 932, 933, 934, 935, 936,
941, 942, 943, 944, 945, 946,
951, 952, 953, 954, 955, 956,
961, 962, 963, 964, 965, 966,

>>> Query = "isinjective, isinvertible, issurjective, rcond, det, LU, P, Q, X, Inverse"
>>> Res = A.eigen_fullPivLu2(Query, B)
>>> print("isinjective : ", Res["isinjective"])
isinjective :  True
>>> print("isinvertible: ", Res["isinvertible"])
isinvertible:  True
>>> print("issurjective: ", Res["issurjective"])
issurjective:  True
>>> print("rcond: ", Res["rcond"])
rcond:  0.0027248962455782943842188862118634888 4
>>> print("det  : ", Res["det"])
det  :  48772174.207999999999999999999999991

>>> Res["X"].show("X")
X:
 21.6,  21.7,  21.7,  21.7,  21.7,  21.8,
 8.21,  8.22,  8.22,  8.23,  8.23,  8.24,
-20.5, -20.6, -20.6, -20.6, -20.6, -20.6,
-15.3, -15.3, -15.4, -15.4, -15.4, -15.4,
 16.9,  16.9,  17.0,  17.0,  17.0,  17.0,
 8.73,  8.76,  8.78,  8.80,  8.82,  8.85,

>>> (A * Res["X"]).show("A * X (should be equal to B)")
A * X (should be equal to B):
911, 912, 913, 914, 915, 916,
921, 922, 923, 924, 925, 926,
931, 932, 933, 934, 935, 936,
941, 942, 943, 944, 945, 946,
951, 952, 953, 954, 955, 956,
961, 962, 963, 964, 965, 966,

>>> (B - A * Res["x"]).show("B - A * X (should be a zero matrix)")
B - A * X (should be a zero matrix):
 8E-33, -6E-33, -5E-33, -2E-33, -8E-33,  9E-33,
 1E-33, -8E-33, -4E-33,  1E-33, -8E-33, -1E-33,
 6E-33,  4E-33,  3E-33,  3E-33, -2E-33,  4E-33,
 1E-33,  0E-33,  2E-33, -2E-33, -1E-33,  3E-33,
 3E-33, -1E-33, -1E-33, -2E-33, -3E-33,  1E-33,
 5E-33,  6E-33,  5E-33,  1E-33, -3E-33,  5E-33,

>>> P1 = Res["P"].eigen_inverse(); P1.show("P^-1")
P^-1:
0, 0, 0, 1, 0, 0,
```

(continues on next page)

(continued from previous page)

```
0, 0, 1, 0, 0, 0,
0, 0, 0, 0, 0, 1,
0, 0, 0, 0, 1, 0,
1, 0, 0, 0, 0, 0,
0, 1, 0, 0, 0, 0,

>>> L = Res["LU"].unit_lower_triangle(); L.show("L")
L:
      1,       0,       0,       0,       0,       0,
      1,       1,       0,       0,       0,       0,
    0.2,  0.0990,       1,       0,       0,       0,
   0.86,   0.409,   0.770,       1,       0,       0,
   0.84,  0.0533,  -0.274, -0.0710,       1,       0,
   0.78,   0.739,   0.404,  0.0750,  -0.295,       1,

>>> U = Res["LU"].upper_triangle(); U.show("U")
U:
    50,   0.44,     23,     42,     42,     23,
     0,   45.6,    -11,     -6,  -40.8,     24,
     0,      0,   42.5,   6.19,   15.6,   3.02,
     0,      0,      0,  -24.4, -0.487,  -7.92,
     0,      0,      0,      0,  -13.9,   2.67,
     0,      0,      0,      0,      0,   1.49,

>>> Q1 = Res["Q"].eigen_inverse(); Q1.show("Q^-1")
Q^-1:
0, 1, 0, 0, 0, 0,
0, 0, 0, 1, 0, 0,
1, 0, 0, 0, 0, 0,
0, 0, 0, 0, 1, 0,
0, 0, 1, 0, 0, 0,
0, 0, 0, 0, 0, 1,

>>> (P1 * L * U * Q1).show("A = P^-1 * L * U * Q^-1 (should be equal to A)")
A = P^-1 * L * U * Q^-1 (should be equal to A):
 48.0,  43.0,  31.0,  19.0,  14.0,  24.0,
 46.0,  10.0,  20.0,  4.60,  14.0,  10.0,
 27.0,  39.0,  13.0,  34.0,  29.0,  37.0,
 7.10,  42.0,  15.0,  2.80,  35.0,  23.0,
 23.0,  50.0,  42.0, 0.440,  42.0,  23.0,
 12.0,  50.0,  1.20,  46.0,  36.0,  47.0,

>>> Res["Inverse"].show("Inverse of A")
Inverse of A:
 0.0113,  0.0426, -0.0633, 0.00768, -0.0128,  0.0375,
 0.0459,  0.0319,  -0.201, -0.0115,  0.0136,   0.127,
-0.0121, -0.0523,   0.129, -0.0340,  0.0322, -0.0835,
0.00719,  0.0757,  -0.283,  -0.141,  0.0901,   0.228,
-0.0289,  0.0940,  -0.220, -0.0636,  0.0627,   0.169,
-0.0363,  -0.190,   0.672,   0.198,  -0.148,  -0.473,

>>> (A * Res["Inverse"]).show("A * Inverse (should be an identity matrix)")
A * Inverse (should be an identity matrix):
  1.00,  2E-35, -2E-34, -1E-35,  0E-35,  1E-34,
-1E-36,   1.00, -2E-35,  0E-35,  0E-35,  3E-35,
 0E-35,  1E-35,   1.00, -1E-35,  0E-35,  1E-34,
-3E-36,  2E-35,  0E-34,   1.00,  0E-35,  0E-34,
-3E-36,  0E-35,  0E-34,  0E-35,   1.00,  0E-34,
 1E-35,  2E-35,  0E-34,  0E-35,  1E-35,   1.00,
```

6.7.3.2 Example for a complex matrix

```
>>> from xlcalcnet import *
>>> ctx = mp14.dcf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecCplxTableB6x6", "")
>>> A = A.top_left_corner(4,4); A.show("A")

>>> # This needs to be an invertible matrix
A:
45.0 + 7.50j, 2.90 + 36.0j, 11.0 + 13.0j, 37.0 + 37.0j,
13.0 + 29.0j, 38.0 + 41.0j, 22.0 + 44.0j, 28.0 + 20.0j,
32.0 + 9.00j, 42.0 + 49.0j, 47.0 + 11.0j, 32.0 + 49.0j,
34.0 + 42.0j, 6.00 + 16.0j, 20.0 + 38.0j, 22.0 + 17.0j,

>>> B = ctx.read_from_sqlite(mp14.dbpath(), "DecCplxTableA6x6", "")
>>> B = B.top_left_corner(4,4); B.show("B")
B:
11.0 + 31.0j, 12.0 + 32.0j, 13.0 + 33.0j, 14.0 + 34.0j,
21.0 + 41.0j, 22.0 + 42.0j, 23.0 + 43.0j, 24.0 + 44.0j,
31.0 + 51.0j, 32.0 + 52.0j, 33.0 + 53.0j, 34.0 + 54.0j,
41.0 + 61.0j, 42.0 + 62.0j, 43.0 + 63.0j, 44.0 + 64.0j,

>>> Query = "isinjective, isinvertible, issurjective, rcond, det, LU, P, Q, X, Inverse"
>>> Res = A.eigen_fullPivLu2(Query, B)
>>> print("isinjective : ", Res["isinjective"])
isinjective :  True
>>> print("isinvertible: ", Res["isinvertible"])
isinvertible:  True
>>> print("issurjective: ", Res["issurjective"])
issurjective:  True
>>> print("rcond: ", Res["rcond"])
rcond:  0.018712448036456211456272670465202252 4 0j
>>> print("det  : ", Res["det"])
det  :  1083952.899999999999999999999999999 - 676519.300000000000000000000000000006j

>>> Res["X"].show("X")
X:
-0.869 - 3.37j, -0.858 - 3.37j, -0.846 - 3.38j, -0.835 - 3.38j,
 -1.82 - 3.22j,  -1.82 - 3.22j,  -1.82 - 3.23j,  -1.81 - 3.23j,
  2.15 + 3.53j,   2.15 + 3.53j,   2.16 + 3.53j,   2.16 + 3.53j,
  1.81 + 3.52j,   1.82 + 3.53j,   1.84 + 3.54j,   1.86 + 3.55j,

>>> (A * Res["X"]).show("A * X (should be equal to B)")
A * X (should be equal to B):
11.0 + 31.0j, 12.0 + 32.0j, 13.0 + 33.0j, 14.0 + 34.0j,
21.0 + 41.0j, 22.0 + 42.0j, 23.0 + 43.0j, 24.0 + 44.0j,
31.0 + 51.0j, 32.0 + 52.0j, 33.0 + 53.0j, 34.0 + 54.0j,
41.0 + 61.0j, 42.0 + 62.0j, 43.0 + 63.0j, 44.0 + 64.0j,

>>> (B - A * Res["x"]).show("B - A * X (should be a zero matrix)")
B - A * X (should be a zero matrix):
-2.50E-33 + 1.00E-33j,        -3.00E-34 + 0j, -1.00E-33 + 1.00E-33j,  5.00E-34 + 2.00E-33j,
 6.00E-34 + 2.00E-33j, -1.00E-34 + 1.00E-33j,        -6.00E-34 + 0j,  3.00E-34 + 2.00E-33j,
       -1.00E-33 + 0j,         0 - 1.00E-33j, -1.00E-33 - 1.00E-33j,        -1.00E-33 + 0j,
       -1.10E-33 + 0j,        -1.00E-34 + 0j,  1.00E-34 - 1.00E-33j,  9.00E-34 + 2.00E-33j,

>>> P1 = Res["P"].eigen_inverse(); P1.show("P^-1")
P^-1:
   0 + 0j,    0 + 0j, 1.00 + 0j,    0 + 0j,
   0 + 0j,    0 + 0j,    0 + 0j, 1.00 + 0j,
1.00 + 0j,    0 + 0j,    0 + 0j,    0 + 0j,
   0 + 0j, 1.00 + 0j,    0 + 0j,    0 + 0j,

>>> L = Res["LU"].unit_lower_triangle(); L.show("L")
L:
      1.00 + 0j,          0 + 0j,          0 + 0j,          0 + 0j,
0.249 + 0.0907j,       1.00 + 0j,          0 + 0j,          0 + 0j,
```

(continues on next page)

(continued from previous page)

```
 0.453 + 0.329j,  0.306 - 0.685j,       1.00 + 0j,          0 + 0j,
0.865 - 0.0336j,  0.201 + 0.554j, -0.512 - 0.745j,       1.00 + 0j,

>>> U = Res["LU"].upper_triangle(); U.show("U")
U:
 42.0 + 49.0j,  32.0 + 9.00j,  32.0 + 49.0j,  47.0 + 11.0j,
       0 + 0j,  26.9 + 36.9j,  18.5 + 1.91j,  9.31 + 31.0j,
       0 + 0j,        0 + 0j,  31.7 + 16.4j, -30.7 - 10.6j,
       0 + 0j,        0 + 0j,        0 + 0j, -11.6 - 3.64j,

>>> Q1 = Res["Q"].eigen_inverse(); Q1.show("Q^-1")
Q^-1:
   0 + 0j, 1.00 + 0j,    0 + 0j,    0 + 0j,
1.00 + 0j,    0 + 0j,    0 + 0j,    0 + 0j,
   0 + 0j,    0 + 0j,    0 + 0j, 1.00 + 0j,
   0 + 0j,    0 + 0j, 1.00 + 0j,    0 + 0j,

>>> (P1 * L * U * Q1).show("A = P^-1 * L * U * Q^-1 (should be equal to A)")
A = P^-1 * L * U * Q^-1 (should be equal to A):
45.0 + 7.50j, 2.90 + 36.0j, 11.0 + 13.0j, 37.0 + 37.0j,
13.0 + 29.0j, 38.0 + 41.0j, 22.0 + 44.0j, 28.0 + 20.0j,
32.0 + 9.00j, 42.0 + 49.0j, 47.0 + 11.0j, 32.0 + 49.0j,
34.0 + 42.0j, 6.00 + 16.0j, 20.0 + 38.0j, 22.0 + 17.0j,

>>> Res["Inverse"].show("Inverse of A")
Inverse of A:
   0.0516 + 0.0468j,    0.0667 - 0.0273j, -0.0516 + 0.000462j,   -0.0635 - 0.0282j,
   0.0449 + 0.0423j,    0.0801 - 0.0400j, -0.0447 + 0.000795j,  -0.0814 - 0.00721j,
  -0.0583 - 0.0458j,   -0.0783 + 0.0245j,   0.0599 + 0.00584j,    0.0786 + 0.0125j,
  -0.0338 - 0.0465j,   -0.0674 + 0.0325j,    0.0409 - 0.0104j,    0.0738 + 0.0219j,

>>> (A * Res["Inverse"]).show("A * Inverse (should be an identity matrix)")
A * Inverse (should be an identity matrix):
     1.00 + 1.00E-35j,         0 + 2.00E-35j,         0 + 1.00E-35j,         1.00E-35 + 0j,
        0 + 3.00E-35j,      1.00 + 1.30E-35j,  1.00E-35 - 2.00E-35j,         0 - 2.00E-35j,
       -1.00E-35 + 0j, -2.00E-35 + 1.00E-35j,      1.00 - 2.00E-35j,  2.00E-35 - 1.00E-35j,
        1.30E-35 + 0j,         0 - 8.00E-36j,         0 - 3.00E-36j,      1.00 - 1.00E-35j,
```

6.7.4 Cholesky Decomposition without Pivoting

`ctx.mat_llt`(*matA*, *Query*, *matB*)

Returns the Cholesky decomposition of the symmetric matrix *matA* $= A = LL^T = U^TU$, without pivoting.

Writing `matA.LLT(Query, matB)` has the same effect

See also Eigen [231], Wikipedia [1393], Wikipedia [1423].

Parameters:

Query
Required. A string specifying which items of the result section should be computed.

B
Optional. A general n-by-m matrix of the same type as A. You need to specify B only if you want to solve the linear equation $AX = B$

Results:

det
A scalar of a return type matching A. The determinant of A.

rcond
A scalar of the same return type as det. The condition number of A.

X
A general matrix of the same type and dimension as B. The solution to $AX = B$.

Inv
A square matrix of the same type and dimension as A. The inverse of A, A^{-1}.

L
A square matrix of the same type and dimension as A, containing the matrix L in the decomposition $A = LL^T = U^TU$.

U
A square matrix of the same type and dimension as A, containing the matrix U in the decomposition $A = LL^T = U^TU$.

These functions perform a LL^T Cholesky decomposition of a symmetric, positive definite matrix A such that $A = LL^T = U^TU$, where L is lower triangular. While the Cholesky decomposition is particularly useful to solve selfadjoint problems like $D^TDx = b$, for that purpose, we recommend the Cholesky decomposition without square root which is more stable and even faster. Nevertheless, this standard Cholesky decomposition remains useful in many other situations like generalised eigen problems with hermitian matrices. Remember that Cholesky decompositions are not rank-revealing. This LL^T decomposition is only stable on positive definite matrices, use LDL^T instead for the semidefinite case. Also, do not use a Cholesky decomposition to determine whether a system of equations has a solution.

6.7.4.1 Example for a real symmetric matrix

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableRandomSAPosDefA6x6", ""); A.show("A")

>>> # This needs to be a self-adjoint, positive definite matrix
A:
248,  40,  38,  43,  33,  35,
 40, 240,  25,  38,  28,  35,
 38,  25, 245,  40,  33,  17,
 43,  38,  40, 250,  30,  33,
 33,  28,  33,  30, 240,  22,
 35,  35,  17,  33,  22, 243,
```

(continues on next page)

(continued from previous page)

```
>>> B = ctx.read_from_sqlite(mp14.dbpath(), "DecTableB6x6", ""); B.show("B")
B:
911, 912, 913, 914, 915, 916,
921, 922, 923, 924, 925, 926,
931, 932, 933, 934, 935, 936,
941, 942, 943, 944, 945, 946,
951, 952, 953, 954, 955, 956,
961, 962, 963, 964, 965, 966,

>>> Query = "info, rcond, X, L, U, Inverse"
>>> Res = A.eigen_llt2(Query, B)
>>> print("Info : ", Res["Info"])
Info :  0
>>> print("Rcond: ", Res["Rcond"])
Rcond:  0.387103744149799746293987557343114309

>>> Res["X"].show("X")
X:
1.86, 1.86, 1.86, 1.87, 1.87, 1.87,
2.26, 2.26, 2.26, 2.26, 2.27, 2.27,
2.41, 2.41, 2.41, 2.42, 2.42, 2.42,
2.05, 2.05, 2.05, 2.06, 2.06, 2.06,
2.61, 2.61, 2.62, 2.62, 2.62, 2.62,
2.68, 2.68, 2.68, 2.69, 2.69, 2.69,

>>> (A * Res["X"]).show("A * X")
A * X:
911, 912, 913, 914, 915, 916,
921, 922, 923, 924, 925, 926,
931, 932, 933, 934, 935, 936,
941, 942, 943, 944, 945, 946,
951, 952, 953, 954, 955, 956,
961, 962, 963, 964, 965, 966,

>>> (B - A * Res["x"]).show("B - A * X")
B - A * X:
-3E-33, -3E-33,      0, -1E-33, -4E-33, -2E-33,
-3E-33, -5E-33, -1E-33, -2E-33, -5E-33, -2E-33,
     0,  1E-33,      0,      0,  2E-33,      0,
-2E-33, -3E-33, -2E-33, -1E-33, -3E-33, -3E-33,
 3E-33,  3E-33,  4E-33,  1E-33, -1E-33,  1E-33,
-1E-33, -2E-33, -3E-33, -1E-33, -4E-33, -2E-33,

>>> Res["L"].show("L")
L:
 15.7,     0,     0,     0,     0,     0,
 2.54,  15.3,     0,     0,     0,     0,
 2.41,  1.23,  15.4,     0,     0,     0,
 2.73,  2.03,  2.00,  15.3,     0,     0,
 2.10,  1.48,  1.69,  1.17,  15.1,     0,
 2.22,  1.92, 0.601,  1.43, 0.780,  15.2,

>>> Res["U"].show("U")
U:
 15.7,  2.54,  2.41,  2.73,  2.10,  2.22,
    0,  15.3,  1.23,  2.03,  1.48,  1.92,
    0,     0,  15.4,  2.00,  1.69, 0.601,
    0,     0,     0,  15.3,  1.17,  1.43,
    0,     0,     0,     0,  15.1, 0.780,
    0,     0,     0,     0,     0,  15.2,

>>> (A - Res["L"] * Res["U"]).show("A - L * U")
A - L * U:
 1E-33,      0,  1E-34,      0, -1E-34,  1E-34,
     0,      0,      0,      0, -1E-34,      0,
```

(continues on next page)

(continued from previous page)

```
 1E-34,      0,      0,      0, -1E-34,      0,
     0,      0,      0,      0,      0,  1E-34,
-1E-34, -1E-34, -1E-34,      0,      0,      0,
 1E-34,      0,      0,  1E-34,      0,  1E-33,

>>> Res["Inverse"].show("Inverse")
Inverse:
   0.00438,  -0.000496,  -0.000466,  -0.000502,  -0.000379,  -0.000424,
 -0.000496,    0.00445,  -0.000228,  -0.000455,  -0.000320,  -0.000463,
 -0.000466,  -0.000228,    0.00433,  -0.000513,  -0.000431, -0.0000939,
 -0.000502,  -0.000455,  -0.000513,    0.00433,  -0.000313,  -0.000385,
 -0.000379,  -0.000320,  -0.000431,  -0.000313,    0.00437,  -0.000223,
 -0.000424,  -0.000463, -0.0000939,  -0.000385,  -0.000223,    0.00432,

>>> (A * Res["Inverse"]).show("A * Inverse")
A * Inverse:
     1.00,    -7E-37,   6.3E-37,         0, -1.35E-36,    -1E-36,
   -3E-37,      1.00,  -4.7E-37,    -6E-37,  -3.5E-37,    -1E-36,
  9.7E-37,   1.6E-37,      1.00,   3.6E-37,  -3.7E-37,         0,
    8E-37,  -1.3E-36,  -7.2E-37,      1.00,  -1.3E-37,     1E-36,
 1.25E-36,     3E-37,  -3.5E-37,   8.2E-37,      1.00,     2E-37,
    1E-36,    -2E-36,         0,   1.1E-36,    -3E-37,      1.00,
```

6.7.4.2 Example for a hermitian matrix

```
>>> from xlcalcnet import *
>>> ctx = mp14.dcf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecCplxTableRandomSAPosDefA6x6", "")
>>> A = A.top_left_corner(4,4); A.show("A")

>>> # This needs to be a self-adjoint, positive definite matrix
A:
   91.0 + 0j, 12.0 - 3.60j, 22.0 - 7.40j, 14.0 + 1.10j,
12.0 + 3.60j,    77.0 + 0j, 2.50 - 2.00j, 3.40 - 7.60j,
22.0 + 7.40j, 2.50 + 2.00j,    91.0 + 0j, 17.0 + 3.70j,
14.0 - 1.10j, 3.40 + 7.60j, 17.0 - 3.70j,    74.0 + 0j,

>>> B = ctx.read_from_sqlite(mp14.dbpath(), "DecCplxTableB6x6", "")
>>> B = B.top_left_corner(4,4); B.show("B")
B:
45.0 + 7.50j, 2.90 + 36.0j, 11.0 + 13.0j, 37.0 + 37.0j,
13.0 + 29.0j, 38.0 + 41.0j, 22.0 + 44.0j, 28.0 + 20.0j,
32.0 + 9.00j, 42.0 + 49.0j, 47.0 + 11.0j, 32.0 + 49.0j,
34.0 + 42.0j, 6.00 + 16.0j, 20.0 + 38.0j, 22.0 + 17.0j,

>>> Query = "info, rcond, X, L, U, Inverse"
>>> Res = A.eigen_llt2(Query, B)
>>> print("Info : ", Res["Info"])
Info :  0 + 0j
>>> print("Rcond: ", Res["Rcond"])
Rcond:  0.41520387595592569380609948826249957 1 + 0j

>>> Res["X"].show("X")
X:
    0.376 - 0.0288j,     -0.222 + 0.281j,   -0.0865 + 0.0417j,      0.229 + 0.303j,
    0.0290 + 0.383j,      0.511 + 0.498j,      0.227 + 0.583j,      0.309 + 0.210j,
    0.219 - 0.0602j,      0.535 + 0.463j,    0.527 - 0.00173j,      0.288 + 0.417j,
     0.379 + 0.583j, 0.000510 + 0.00479j,      0.214 + 0.481j,     0.170 + 0.0528j,

>>> (A * Res["X"]).show("A * X")
A * X:
45.0 + 7.50j, 2.90 + 36.0j, 11.0 + 13.0j, 37.0 + 37.0j,
13.0 + 29.0j, 38.0 + 41.0j, 22.0 + 44.0j, 28.0 + 20.0j,
32.0 + 9.00j, 42.0 + 49.0j, 47.0 + 11.0j, 32.0 + 49.0j,
```

(continues on next page)

(continued from previous page)

```
34.0 + 42.0j, 6.00 + 16.0j, 20.0 + 38.0j, 22.0 + 17.0j,

>>> (B - A * Res["x"]).show("B - A * X")
B - A * X:
-1.00E-34 + 4.00E-35j, -7.00E-35 - 2.00E-34j,                0 + 0j, -2.00E-34 - 1.00E-34j,
        0 + 1.00E-34j,         1.00E-34 + 0j,  1.00E-34 + 1.00E-34j,                0 + 0j,
-3.00E-34 + 3.00E-35j, -3.00E-34 - 3.00E-34j,        -3.00E-34 + 0j, -2.00E-34 - 2.00E-34j,
 2.00E-34 + 4.00E-34j, -3.00E-35 - 1.00E-34j,  1.00E-34 + 1.00E-34j,  1.00E-34 + 1.00E-34j,

>>> Res["L"].show("L")
L:
       9.54 + 0j,           0 + 0j,           0 + 0j,           0 + 0j,
   1.26 + 0.377j,        8.68 + 0j,           0 + 0j,           0 + 0j,
   2.31 + 0.776j, -0.0800 + 0.218j,        9.22 + 0j,           0 + 0j,
   1.47 - 0.115j,   0.184 + 0.956j,    1.47 - 0.236j,        8.29 + 0j,

>>> Res["U"].show("U")
U:
       9.54 + 0j,    1.26 - 0.377j,    2.31 - 0.776j,    1.47 + 0.115j,
          0 + 0j,        8.68 + 0j, -0.0800 - 0.218j,   0.184 - 0.956j,
          0 + 0j,           0 + 0j,        9.22 + 0j,    1.47 + 0.236j,
          0 + 0j,           0 + 0j,           0 + 0j,        8.29 + 0j,

>>> (A - Res["L"] * Res["U"]).show("A - L * U")
A - L * U:
        0 + 0j,         0 + 0j,         0 + 0j,         0 + 0j,
        0 + 0j, -2.00E-34 + 0j,         0 + 0j,         0 + 0j,
        0 + 0j,         0 + 0j,         0 + 0j,  1.00E-34 + 0j,
        0 + 0j,         0 + 0j,  1.00E-34 + 0j, -1.00E-34 + 0j,

>>> Res["Inverse"].show("Inverse")
Inverse:
   0.0122 + 1.36E-39j,  -0.00177 + 0.000794j,  -0.00259 + 0.000957j,  -0.00167 - 0.000490j,
 -0.00177 - 0.000794j,    0.0135 + 1.96E-40j, 0.000120 + 0.0000425j,  -0.000321 + 0.00154j,
 -0.00259 - 0.000957j, 0.000120 - 0.0000425j,    0.0121 + 2.17E-40j,  -0.00231 - 0.000373j,
 -0.00167 + 0.000490j,  -0.000321 - 0.00154j,  -0.00231 + 0.000373j,           0.0146 + 0j,

>>> (A * Res["Inverse"]).show("A * Inverse")
A * Inverse:
     1.00 + 8.00E-38j, -8.40E-37 + 2.00E-37j, -8.00E-37 + 2.30E-37j, -1.00E-36 - 1.00E-37j,
 1.56E-36 + 4.00E-37j,       1.00 - 4.00E-38j,  1.60E-37 - 1.00E-37j,  1.00E-37 + 1.00E-36j,
 1.20E-36 + 4.00E-38j, -4.00E-38 - 3.00E-37j,      1.00 + 6.00E-38j, -1.00E-36 - 3.00E-37j,
 1.00E-36 - 4.00E-37j,         0 + 1.00E-36j,         1.00E-36 + 0j,      1.00 - 2.00E-38j,
```

6.7.5 QR Decomposition without Pivoting

`ctx.mat_householder_qr`(*matA*, *Query*, *matB*)

Returns the QR decomposition of the symmetric matrix *matA* $= A = QR$, without pivoting.

Writing `mat.HouseholderQR(Query, matB)` has the same effect

See also Eigen [228], Wikipedia [1427], Wikipedia [1423].

Parameters:

Query
Required. A string specifying which items of the result section should be computed.

B
Optional. A general n-by-m matrix of the same type as A. You need to specify B only if you want to solve the linear equation $AX = B$

Results:

signdet
A scalar of a return type matching A. The sign of the determinant of A.

absdet
A scalar of a return type matching A. The absolute value of the determinant of A.

logabsdet
A scalar of a return type matching A. The logarithm of the absolute value of the determinant of A.

X
A general matrix of the same type and dimension as B. The solution to $AX = B$.

Inv
A square matrix of the same type and dimension as A. The inverse of A, A^{-1}.

QR
A square matrix of the same type and dimension as A, containing the matrices Q and R in the decomposition $A = QR$.

This class performs a QR decomposition of a matrix A into matrices Q and R such that $A = QR$ by using Householder transformations. Here, Q a unitary matrix and R an upper triangular matrix. The result is stored in a compact way compatible with LAPACK. Note that no pivoting is performed.

This is not a rankrevealing decomposition. If you want that feature, use FullPivHouseholderQR or ColPivHouseholderQR instead.

This Householder QR decomposition is faster, but less numerically stable and less feature-rich than FullPivHouseholderQR or ColPivHouseholderQR

6.7.5.1 Example for a real general square matrix (Python)

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableRandomA6x6", ""); A.show("A")

>>> # This needs to be a square matrix
A:
  48,   43,   31,   19,   14,   24,
  46,   10,   20,  4.6,   14,   10,
  27,   39,   13,   34,   29,   37,
 7.1,   42,   15,  2.8,   35,   23,
  23,   50,   42, 0.44,   42,   23,
  12,   50,  1.2,   46,   36,   47,

>>> B = ctx.read_from_sqlite(mp14.dbpath(), "DecTableB6x6", ""); B.show("B")
```

(continues on next page)

(continued from previous page)

```
B:
911, 912, 913, 914, 915, 916,
921, 922, 923, 924, 925, 926,
931, 932, 933, 934, 935, 936,
941, 942, 943, 944, 945, 946,
951, 952, 953, 954, 955, 956,
961, 962, 963, 964, 965, 966,

>>> Query = "absdet, logabsdet, householderq, QR, X, Inverse"
>>> Res = A.eigen_householderQr2(Query, B)
>>> print("absdet     : ", Res["absdet"])
absdet     :  48772174.207999999999999999999999994
>>> print("logabsdet  : ", Res["logabsdet"])
logabsdet  :  17.702670507541421335076l102045531515

>>> Res["X"].show("X")
X:
 21.6,  21.7,  21.7,  21.7,  21.7,  21.8,
 8.21,  8.22,  8.22,  8.23,  8.23,  8.24,
-20.5, -20.6, -20.6, -20.6, -20.6, -20.6,
-15.3, -15.3, -15.4, -15.4, -15.4, -15.4,
 16.9,  16.9,  17.0,  17.0,  17.0,  17.0,
 8.73,  8.76,  8.78,  8.80,  8.82,  8.85,

>>> (A * Res["X"]).show("A * X (should be equal to B)")
A * X (should be equal to B):
911, 912, 913, 914, 915, 916,
921, 922, 923, 924, 925, 926,
931, 932, 933, 934, 935, 936,
941, 942, 943, 944, 945, 946,
951, 952, 953, 954, 955, 956,
961, 962, 963, 964, 965, 966,

>>> (B - A * Res["x"]).show("B - A * X (should be a zero matrix)")
B - A * X (should be a zero matrix):
  -5E-33,    8E-33,   -4E-33,    2E-33, -1.3E-32,    2E-33,
-1.0E-32,   -7E-33,   -5E-33,    2E-33, -1.3E-32,    0E-33,
   4E-33,  1.0E-32,    5E-33,  1.0E-32,    5E-33,    5E-33,
   5E-33,    8E-33,    4E-33,    9E-33,    5E-33,    3E-33,
  -2E-33,    4E-33,   -2E-33,    3E-33,   -3E-33,   -2E-33,
   4E-33,    7E-33,    3E-33,    8E-33,    4E-33,    3E-33,

>>> R = Res["QR"].upper_triangle(); R.show("R")
R:
-76.6, -73.4, -50.2, -34.2, -48.9, -50.5,
    0,  69.6,  16.5,  30.4,  52.5,  47.9,
    0,     0,  27.0, -36.2,  3.91, -19.6,
    0,     0,     0,  15.9, -2.42,  6.43,
    0,     0,     0,     0, -18.7, -6.45,
    0,     0,     0,     0,     0, -1.14,

>>> Q = Res["Householderq"]; Q.show("Q")
Q:
 -0.626, -0.0428, 0.00995, -0.0493,   0.776,  0.0413,
 -0.600,  -0.489, -0.0766,  -0.243,  -0.538,   0.215,
 -0.352,   0.189,  -0.288,   0.362,  -0.207,  -0.764,
-0.0927,   0.506,  0.0749,  -0.819, -0.0880,  -0.225,
 -0.300,   0.402,   0.752,   0.328,  -0.218,   0.169,
 -0.157,   0.553,  -0.583,   0.169,  -0.106,   0.538,

>>> (Q.T * Q).show("Q.T * Q (should be an identity matrix)")
Q.T * Q (should be an identity matrix):
    1.00,   -8E-37,    1E-37,   -3E-37,   -8E-37, -1.4E-36,
  -8E-37,     1.00,   -1E-36,   -9E-37, -7.7E-36,    0E-36,
   1E-37,   -1E-36,     1.00, -2.1E-36,    0E-37,    2E-36,
  -3E-37,   -9E-37, -2.1E-36,     1.00, -2.0E-36,   -6E-37,
```

(continues on next page)

(continued from previous page)

```
  -8E-37, -7.7E-36,    0E-37, -2.0E-36,     1.00,    1E-37,
-1.4E-36,    0E-36,    2E-36,   -6E-37,    1E-37,     1.00,

>>> (Q * R).show("Q * R (should be equal to A)")
Q * R (should be equal to A):
 48.0,  43.0,  31.0,  19.0,  14.0,  24.0,
 46.0,  10.0,  20.0,  4.60,  14.0,  10.0,
 27.0,  39.0,  13.0,  34.0,  29.0,  37.0,
 7.10,  42.0,  15.0,  2.80,  35.0,  23.0,
 23.0,  50.0,  42.0, 0.440,  42.0,  23.0,
 12.0,  50.0,  1.20,  46.0,  36.0,  47.0,

>>> Res["Inverse"].show("Inverse of A")
Inverse of A:
 0.0113,  0.0426, -0.0633, 0.00768, -0.0128,  0.0375,
 0.0459,  0.0319,  -0.201, -0.0115,  0.0136,   0.127,
-0.0121, -0.0523,   0.129, -0.0340,  0.0322, -0.0835,
0.00719,  0.0757,  -0.283,  -0.141,  0.0901,   0.228,
-0.0289,  0.0940,  -0.220, -0.0636,  0.0627,   0.169,
-0.0363,  -0.190,   0.672,   0.198,  -0.148,  -0.473,

>>> (A * Res["Inverse"]).show("A * Inverse (should be an identity matrix)")
A * Inverse (should be an identity matrix):
    1.00,   -5E-35,    0E-34,    4E-35,   -1E-35,    0E-34,
 4.1E-35,     1.00, -2.4E-34,   -2E-35,    3E-35,  1.3E-34,
  -1E-35,   -2E-35,     1.00,   -1E-35,    1E-35,    0E-34,
  -7E-36,   -1E-35,    1E-34,     1.00,   -1E-35,    0E-34,
   3E-36,   -2E-35,    0E-34,    4E-35,     1.00,    0E-34,
   0E-35,   -1E-35,    0E-34,    1E-35,    0E-35,     1.00,
```

6.7.5.2 Example for a complex matrix

```
>>> from xlcalcnet import *
>>> ctx = mp14.dcf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecCplxTableB6x6", "")
>>> A = A.top_left_corner(4,4); A.show("A")

>>> # This needs to be an invertible matrix
A:
45.0 + 7.50j, 2.90 + 36.0j, 11.0 + 13.0j, 37.0 + 37.0j,
13.0 + 29.0j, 38.0 + 41.0j, 22.0 + 44.0j, 28.0 + 20.0j,
32.0 + 9.00j, 42.0 + 49.0j, 47.0 + 11.0j, 32.0 + 49.0j,
34.0 + 42.0j, 6.00 + 16.0j, 20.0 + 38.0j, 22.0 + 17.0j,

>>> B = ctx.read_from_sqlite(mp14.dbpath(), "DecCplxTableA6x6", "")
>>> B = B.top_left_corner(4,4); B.show("B")
B:
11.0 + 31.0j, 12.0 + 32.0j, 13.0 + 33.0j, 14.0 + 34.0j,
21.0 + 41.0j, 22.0 + 42.0j, 23.0 + 43.0j, 24.0 + 44.0j,
31.0 + 51.0j, 32.0 + 52.0j, 33.0 + 53.0j, 34.0 + 54.0j,
41.0 + 61.0j, 42.0 + 62.0j, 43.0 + 63.0j, 44.0 + 64.0j,

>>> Query = "absdet, logabsdet, householderq, QR, X, Inverse"
>>> Res = A.eigen_householderQr2(Query, B)
>>> print("absdet     : ", Res["absdet"])
absdet     :  1277744.9873472014525224864573725287 9 + 0j
>>> print("logabsdet  : ", Res["logabsdet"])
logabsdet  :  14.06060735359187918337944436242808 12 + 0j

>>> Res["X"].show("X")
X:
-0.869 - 3.37j, -0.858 - 3.37j, -0.846 - 3.38j, -0.835 - 3.38j,
 -1.82 - 3.22j,  -1.82 - 3.22j,  -1.82 - 3.23j,  -1.81 - 3.23j,
  2.15 + 3.53j,   2.15 + 3.53j,   2.16 + 3.53j,   2.16 + 3.53j,
```

(continues on next page)

(continued from previous page)

```
  1.81 + 3.52j,   1.82 + 3.53j,   1.84 + 3.54j,   1.86 + 3.55j,

>>> (A * Res["X"]).show("A * X (should be equal to B)")
A * X (should be equal to B):
11.0 + 31.0j, 12.0 + 32.0j, 13.0 + 33.0j, 14.0 + 34.0j,
21.0 + 41.0j, 22.0 + 42.0j, 23.0 + 43.0j, 24.0 + 44.0j,
31.0 + 51.0j, 32.0 + 52.0j, 33.0 + 53.0j, 34.0 + 54.0j,
41.0 + 61.0j, 42.0 + 62.0j, 43.0 + 63.0j, 44.0 + 64.0j,

>>> (B - A * Res["x"]).show("B - A * X (should be a zero matrix)")
B - A * X (should be a zero matrix):
-2.00E-34 - 1.00E-33j,  1.00E-34 - 1.00E-33j,        -1.10E-33 + 0j,  2.00E-34 + 1.00E-33j,
       -2.00E-34 + 0j, -2.80E-33 - 1.00E-33j,        -1.80E-33 + 0j,         0 - 2.00E-33j,
        1.00E-33 + 0j,         0 + 1.00E-33j,        -1.00E-33 + 0j,         1.00E-33 + 0j,
-1.00E-34 - 1.00E-33j, -1.50E-33 + 1.00E-33j,         1.30E-33 + 0j, -1.00E-34 + 1.00E-33j,

>>> R = Res["QR"].upper_triangle(); R.show("R")
R:
    -84.3 + 0j,  -56.2 - 29.8j,  -71.5 - 9.69j,  -68.9 - 21.0j,
        0 + 0j,     -69.5 + 0j, -29.8 - 0.903j,  -42.7 + 7.20j,
        0 + 0j,         0 + 0j,     -28.1 + 0j,  31.5 - 0.339j,
        0 + 0j,         0 + 0j,         0 + 0j,     -7.76 + 0j,

>>> Q = Res["Householderq"]; Q.show("Q")
Q:
-0.533 - 0.0889j,   0.352 - 0.217j,   0.557 + 0.167j,   0.262 - 0.361j,
 -0.154 - 0.344j,  -0.569 - 0.246j,  0.0855 - 0.360j,   0.523 + 0.252j,
 -0.379 - 0.107j,  -0.343 - 0.456j,  -0.396 + 0.505j, -0.318 - 0.0806j,
 -0.403 - 0.498j,  0.0266 + 0.345j,   0.125 - 0.313j,  -0.572 + 0.170j,

>>> (Q.T * Q.conjugate()).show("Q.T * Q.conjugate() (should be an identity matrix)")
Q.T * Q.conjugate() (should be an identity matrix):
          1.00 + 0j, 1.00E-36 - 1.00E-36j,        0 + 1.00E-36j, 1.00E-36 + 2.00E-36j,
1.00E-36 + 1.00E-36j,            1.00 + 0j, 3.00E-36 - 1.10E-36j,        1.60E-36 + 0j,
       0 - 1.00E-36j, 3.00E-36 + 1.10E-36j,            1.00 + 0j, 1.00E-36 - 1.00E-36j,
1.00E-36 - 2.00E-36j,        1.60E-36 + 0j, 1.00E-36 + 1.00E-36j,            1.00 + 0j,

>>> (Q * R).show("Q * R (should be equal to A)")
Q * R (should be equal to A):
45.0 + 7.50j, 2.90 + 36.0j, 11.0 + 13.0j, 37.0 + 37.0j,
13.0 + 29.0j, 38.0 + 41.0j, 22.0 + 44.0j, 28.0 + 20.0j,
32.0 + 9.00j, 42.0 + 49.0j, 47.0 + 11.0j, 32.0 + 49.0j,
34.0 + 42.0j, 6.00 + 16.0j, 20.0 + 38.0j, 22.0 + 17.0j,

>>> Res["Inverse"].show("Inverse of A")
Inverse of A:
   0.0516 + 0.0468j,    0.0667 - 0.0273j, -0.0516 + 0.000462j,   -0.0635 - 0.0282j,
   0.0449 + 0.0423j,    0.0801 - 0.0400j, -0.0447 + 0.000795j,  -0.0814 - 0.00721j,
  -0.0583 - 0.0458j,   -0.0783 + 0.0245j,   0.0599 + 0.00584j,    0.0786 + 0.0125j,
  -0.0338 - 0.0465j,   -0.0674 + 0.0325j,    0.0409 - 0.0104j,    0.0738 + 0.0219j,

>>> (A * Res["Inverse"]).show("A * Inverse (should be an identity matrix)")
A * Inverse (should be an identity matrix):
     1.00 - 1.00E-35j,  1.00E-35 + 2.00E-35j,  1.00E-35 + 1.00E-35j,         0 - 1.00E-35j,
-1.10E-35 + 1.00E-35j,      1.00 + 3.10E-35j,  2.00E-35 - 2.50E-35j,  3.00E-35 - 1.00E-35j,
        0 + 1.00E-35j,  2.00E-35 + 1.00E-35j,             1.00 + 0j,        -2.00E-35 + 0j,
 1.20E-35 + 2.00E-35j,  3.00E-35 + 9.00E-36j, -1.00E-35 - 4.00E-36j,             1.00 + 0j,
```

6.7.6 QR Decomposition with column Pivoting

`ctx.mat_col_piv_householder_qr`(*matA*, *Query*, *matB*, *threshold*)

Returns the QR decomposition of the symmetric matrix *matA* $= A = QR$, with column pivoting.

Writing `matA.ColPivHouseholderQR(Query, matB, threshold)` has the same effect

See also: Eigen [219], Wikipedia [1429], Wikipedia [1423].

Parameters:

Query
Required. A string specifying which items of the result section should be computed.

matB
Optional. A general n-by-m matrix of the same type as A. You need to specify B only if you want to solve the linear equation $AX = B$

threshold
Optional. The threshold that will be used by certain methods such as rank().

Results:

info
An integer indicating whether the decompsition was successful(=0) or not(=1).

dimofkernel
An integer returning the dimension of the kernel of A.

rank
An integer returning the rank of A, which need to determine when pivots are to be considered nonzero. This is not used for the QR decomposition itself.

nonzeropivots
An integer returning the number of non-zero ivots in the decomposition.

isinjective
A boolean indicating whether A is injective.

isinvertible
A boolean indicating whether A is invertible.

issurjective
A boolean indicating whether A is surjective.

signdet
A scalar of a return type matching A. The sign of the determinant of A.

absdet
A scalar of a return type matching A. The absolute value of the determinant of A.

logabsdet
A scalar of a return type matching A. The logarithm of the absolute value of the determinant of A.

maxpivot
A scalar of the same return type as det. The absolute value of the biggest pivot, i.e. the biggest diagonal coefficient of R.

X
A general matrix of the same type and dimension as B. The solution to $AX = B$.

Inv
A square matrix of the same type and dimension as A. The inverse of A, A^{-1}.

P
A square matrix of the same type and dimension as A. The matrix P contains the column permutation matrix.

Q
A square matrix of the same type and dimension as A. The matrix Q as a sequence of householder transformations.

R
A square matrix of the same type and dimension as A, containing the matrix R.

QR
A square matrix of the same type and dimension as A, containing the matrix QR.

This class performs a rank-revealing QR decomposition of a matrix A into matrices P, Q and R such that

AP = QR

by using Householder transformations. Here, P is a permutation matrix, Q a unitary matrix and R an upper triangular matrix.

This decomposition performs column pivoting in order to be rank-revealing and improve numerical stability. It is slower than HouseholderQR, and faster than FullPivHouseholderQR.

solve: This method finds a solution x to the equation Ax=b, where A is the matrix of which this is the QR decomposition, if any exists.

Parameters: b the right-hand-side of the equation to solve.

Returns a solution. Note: The case where b is a matrix is not yet implemented. Also, this code is space inefficient.This method just tries to find as good a solution as possible. If you want to check whether a solution exists or if it is accurate, just call this function to get a result and then compute the error of this result, or use

MatrixBase::isApprox() directly, for instance like this:

bool a_solution_exists = (A*result).isApprox(b, precision);

This method avoids dividing by zero, so that the non-existence of a solution doesn't by itself mean that you'll get inf or nan values. If there exists more than one solution, this method will arbitrarily choose one.

6.7.6.1 Example for a real matrix

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableRandomA6x6", ""); A.show("A")

>>> # This needs to be a square matrix
A:
  48,   43,   31,   19,   14,   24,
  46,   10,   20,  4.6,   14,   10,
  27,   39,   13,   34,   29,   37,
 7.1,   42,   15,  2.8,   35,   23,
  23,   50,   42, 0.44,   42,   23,
  12,   50,  1.2,   46,   36,   47,

>>> B = ctx.read_from_sqlite(mp14.dbpath(), "DecTableB6x6", ""); B.show("B")
B:
911, 912, 913, 914, 915, 916,
921, 922, 923, 924, 925, 926,
931, 932, 933, 934, 935, 936,
941, 942, 943, 944, 945, 946,
951, 952, 953, 954, 955, 956,
961, 962, 963, 964, 965, 966,

>>> Query = "isinjective, isinvertible, issurjective, info, dimofkernel, rank, nonzeropivots, "
>>> Query += " absdet, logabsdet, maxpivot, QR, R, Householderq, Hqnonzeros, Permcols, X, Inverse"

>>> Res = A.eigen_colPivHouseholderQr2(Query, B)
```

(continues on next page)

(continued from previous page)

```
>>> print("isinjective  : ", Res["isinjective"])
isinjective  :  True
>>> print("isinvertible : ", Res["isinvertible"])
isinvertible :  True
>>> print("issurjective : ", Res["issurjective"])
issurjective :  True

>>> print("info         : ", Res["info"])
info         :  0
>>> print("dimofkernel  : ", Res["dimofkernel"])
dimofkernel  :  0
>>> print("rank         : ", Res["rank"])
rank         :  6
>>> print("nonzeropivots: ", Res["nonzeropivots"])
nonzeropivots:  6

>>> print("absdet     : ", Res["absdet"])
absdet     :  48772174.208000000000000000000000014
>>> print("logabsdet  : ", Res["logabsdet"])
logabsdet  :  17.702670507541421335076110204553151 6
>>> print("maxpivot   : ", Res["maxpivot"])
maxpivot   :  101.16323442832381088439063261595990 8

>>> Res["X"].show("X")
X:
 21.6,  21.7,  21.7,  21.7,  21.7,  21.8,
 8.21,  8.22,  8.22,  8.23,  8.23,  8.24,
-20.5, -20.6, -20.6, -20.6, -20.6, -20.6,
-15.3, -15.3, -15.4, -15.4, -15.4, -15.4,
 16.9,  16.9,  17.0,  17.0,  17.0,  17.0,
 8.73,  8.76,  8.78,  8.80,  8.82,  8.85,

>>> (A * Res["X"]).show("A * X (should be equal to B)")
A * X (should be equal to B):
911, 912, 913, 914, 915, 916,
921, 922, 923, 924, 925, 926,
931, 932, 933, 934, 935, 936,
941, 942, 943, 944, 945, 946,
951, 952, 953, 954, 955, 956,
961, 962, 963, 964, 965, 966,

>>> (B - A * Res["X"]).show("B - A * X (should be a zero matrix)")
B - A * X (should be a zero matrix):
  -3E-33, -1.6E-32,   -5E-33, -1.7E-32,    4E-33,   -9E-33,
   7E-33,    6E-33,   -3E-33,   -5E-33,    7E-33,    9E-33,
   3E-33,   -4E-33,   -2E-33,   -8E-33,    2E-33,   -5E-33,
  -4E-33,   -7E-33,   -4E-33,   -8E-33,    2E-33, -1.3E-32,
  -8E-33, -1.2E-32, -1.1E-32, -1.8E-32,   -2E-33, -1.2E-32,
  -7E-33, -1.0E-32,   -6E-33, -1.0E-32,   -4E-33, -1.3E-32,

>>> P2 = Res["Permcols"].eigen_inverse(); P2.show("P2^-1")
P2^-1:
0, 1, 0, 0, 0, 0,
1, 0, 0, 0, 0, 0,
0, 0, 0, 1, 0, 0,
0, 0, 0, 0, 1, 0,
0, 0, 1, 0, 0, 0,
0, 0, 0, 0, 0, 1,

>>> R = Res["QR"].upper_triangle(); R.show("R")
R:
  -101,  -55.6,  -45.8,  -71.6,  -47.7,  -69.6,
     0,  -52.7,  -1.51,   4.47,  -22.6, 0.0539,
     0,      0,  -39.6,   4.55,   24.8,  -20.5,
     0,      0,      0,  -18.7,  0.371,  -6.51,
     0,      0,      0,      0,  -10.8,   1.75,
```

(continues on next page)

(continued from previous page)

```
     0,      0,      0,      0,      0,  -1.14,

>>> Q = Res["Householderq"]; Q.show("Q")
Q:
 -0.425,  -0.462,  0.0289,   0.774,  0.0677,  0.0413,
-0.0989,  -0.768,  0.0273,  -0.546,   0.234,   0.215,
 -0.386,  -0.106,  -0.409,  -0.199,  -0.223,  -0.764,
 -0.415,   0.303,   0.398,  -0.113,   0.717,  -0.225,
 -0.494,  0.0850,   0.557,  -0.197,  -0.609,   0.169,
 -0.494,   0.294,  -0.602,  -0.109,  0.0756,   0.538,

>>> Res["Hqnonzeros"].show("Hqnonzeros")
Hqnonzeros:
 -0.425,  -0.462,  0.0289,   0.774,  0.0677,  0.0413,
-0.0989,  -0.768,  0.0273,  -0.546,   0.234,   0.215,
 -0.386,  -0.106,  -0.409,  -0.199,  -0.223,  -0.764,
 -0.415,   0.303,   0.398,  -0.113,   0.717,  -0.225,
 -0.494,  0.0850,   0.557,  -0.197,  -0.609,   0.169,
 -0.494,   0.294,  -0.602,  -0.109,  0.0756,   0.538,

>>> (Q.T * Q).show("Q.T * Q (should be an identity matrix)")
Q.T * Q (should be an identity matrix):
     1.00,    -2E-36,    -1E-36,   3.3E-36,   1.6E-36,     1E-36,
   -2E-36,      1.00,    -2E-36,     3E-37,   2.0E-36,     2E-36,
   -1E-36,    -2E-36,      1.00,  -1.1E-36,    -2E-37,     0E-36,
  3.3E-36,     3E-37,  -1.1E-36,      1.00, -1.10E-36,    -6E-37,
  1.6E-36,   2.0E-36,    -2E-37, -1.10E-36,      1.00,    -9E-37,
    1E-36,     2E-36,     0E-36,    -6E-37,    -9E-37,      1.00,

>>> (Q * R * P2).show("Q * R * P2 (should be equal to A)")
Q * R * P2 (should be equal to A):
 48.0,  43.0,  31.0,  19.0,  14.0,  24.0,
 46.0,  10.0,  20.0,  4.60,  14.0,  10.0,
 27.0,  39.0,  13.0,  34.0,  29.0,  37.0,
 7.10,  42.0,  15.0,  2.80,  35.0,  23.0,
 23.0,  50.0,  42.0, 0.440,  42.0,  23.0,
 12.0,  50.0,  1.20,  46.0,  36.0,  47.0,

>>> Res["Inverse"].show("Inverse of A")
Inverse of A:
 0.0113,  0.0426, -0.0633, 0.00768, -0.0128,  0.0375,
 0.0459,  0.0319,  -0.201, -0.0115,  0.0136,   0.127,
-0.0121, -0.0523,   0.129, -0.0340,  0.0322, -0.0835,
0.00719,  0.0757,  -0.283,  -0.141,  0.0901,   0.228,
-0.0289,  0.0940,  -0.220, -0.0636,  0.0627,   0.169,
-0.0363,  -0.190,   0.672,   0.198,  -0.148,  -0.473,

>>> (A * Res["Inverse"]).show("A * Inverse (should be an identity matrix)")
A * Inverse (should be an identity matrix):
   1.00,  -2E-35,   1E-34,  -1E-35,  -3E-35,  -1E-34,
  0E-36,    1.00,   0E-35,  -2E-35,   0E-35,  -1E-35,
  0E-35,   0E-35,    1.00,  -1E-35,  -1E-35,   0E-34,
 -7E-36,   0E-35,   0E-34,    1.00,  -1E-35,   0E-34,
1.3E-35,  -1E-35,   1E-34,  -3E-35,    1.00,   0E-34,
  0E-35,   1E-35,   0E-34,  -2E-35,  -2E-35,    1.00,
```

6.7.6.2 Example for a complex matrix

```
>>> from xlcalcnet import *
>>> ctx = mp14.dcf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecCplxTableB6x6", "")
>>> A = A.top_left_corner(4,4); A.show("A")

>>> # This needs to be an invertible matrix, `A^{-1}`
```

(continues on next page)

(continued from previous page)

```
A:
45.0 + 7.50j, 2.90 + 36.0j, 11.0 + 13.0j, 37.0 + 37.0j,
13.0 + 29.0j, 38.0 + 41.0j, 22.0 + 44.0j, 28.0 + 20.0j,
32.0 + 9.00j, 42.0 + 49.0j, 47.0 + 11.0j, 32.0 + 49.0j,
34.0 + 42.0j, 6.00 + 16.0j, 20.0 + 38.0j, 22.0 + 17.0j,

>>> B = ctx.read_from_sqlite(mp14.dbpath(), "DecCplxTableA6x6", "")
>>> B = B.top_left_corner(4,4); B.show("B")
B:
11.0 + 31.0j, 12.0 + 32.0j, 13.0 + 33.0j, 14.0 + 34.0j,
21.0 + 41.0j, 22.0 + 42.0j, 23.0 + 43.0j, 24.0 + 44.0j,
31.0 + 51.0j, 32.0 + 52.0j, 33.0 + 53.0j, 34.0 + 54.0j,
41.0 + 61.0j, 42.0 + 62.0j, 43.0 + 63.0j, 44.0 + 64.0j,

>>> Query = "isinjective, isinvertible, issurjective, info, dimofkernel, rank, nonzeropivots, "
>>> Query += " absdet, logabsdet, maxpivot, QR, R, Householderq, Hqnonzeros, Permcols, X, Inverse"

>>> Res = A.eigen_colPivHouseholderQr2(Query, B)

>>> print("isinjective  : ", Res["isinjective"])
isinjective  :  True
>>> print("isinvertible : ", Res["isinvertible"])
isinvertible :  True
>>> print("issurjective : ", Res["issurjective"])
issurjective :  True

>>> print("info         : ", Res["info"])
info         :  0
>>> print("dimofkernel  : ", Res["dimofkernel"])
dimofkernel  :  0
>>> print("rank         : ", Res["rank"])
rank         :  4
>>> print("nonzeropivots: ", Res["nonzeropivots"])
nonzeropivots:  4

>>> print("absdet     : ", Res["absdet"])
absdet     :  1277744.9873472014525224864573725287 4
>>> print("logabsdet  : ", Res["logabsdet"])
logabsdet  :  14.060607353591879183379444362428081 2
>>> print("maxpivot   : ", Res["maxpivot"])
maxpivot   :  94.267756947961798843331053375853945 0

>>> Res["X"].show("X")
X:
-0.869 - 3.37j, -0.858 - 3.37j, -0.846 - 3.38j, -0.835 - 3.38j,
 -1.82 - 3.22j,  -1.82 - 3.22j,  -1.82 - 3.23j,  -1.81 - 3.23j,
  2.15 + 3.53j,   2.15 + 3.53j,   2.16 + 3.53j,   2.16 + 3.53j,
  1.81 + 3.52j,   1.82 + 3.53j,   1.84 + 3.54j,   1.86 + 3.55j,

>>> (A * Res["X"]).show("A * X (should be equal to B)")
A * X (should be equal to B):
11.0 + 31.0j, 12.0 + 32.0j, 13.0 + 33.0j, 14.0 + 34.0j,
21.0 + 41.0j, 22.0 + 42.0j, 23.0 + 43.0j, 24.0 + 44.0j,
31.0 + 51.0j, 32.0 + 52.0j, 33.0 + 53.0j, 34.0 + 54.0j,
41.0 + 61.0j, 42.0 + 62.0j, 43.0 + 63.0j, 44.0 + 64.0j,

>>> (B - A * Res["X"]).show("B - A * X (should be a zero matrix)")
B - A * X (should be a zero matrix):
 9.00E-34 + 1.00E-33j,  8.00E-34 - 1.00E-33j,         2.00E-34 + 0j,  1.10E-33 - 1.00E-33j,
 6.00E-34 - 1.00E-33j,  2.00E-34 - 1.00E-33j, -5.00E-34 - 3.00E-33j,  4.00E-34 - 1.00E-33j,
 1.00E-33 - 4.00E-33j,  1.00E-33 - 3.00E-33j,  1.00E-33 - 2.00E-33j,  1.00E-33 - 3.00E-33j,
 3.00E-34 + 1.00E-33j,         5.00E-34 + 0j,        -6.00E-34 + 0j,        -5.00E-34 + 0j,

>>> P2 = Res["Permcols"].eigen_inverse(); P2.show("P2^-1")
P2^-1:
   0 + 0j, 1.00 + 0j,    0 + 0j,    0 + 0j,
```

(continues on next page)

(continued from previous page)

```
1.00 + 0j,    0 + 0j,    0 + 0j,    0 + 0j,
   0 + 0j,    0 + 0j,    0 + 0j, 1.00 + 0j,
   0 + 0j,    0 + 0j, 1.00 + 0j,    0 + 0j,

>>> R = Res["QR"].upper_triangle(); R.show("R")
R:
    -94.3 + 0j,  -50.3 + 26.6j,  -79.3 + 14.6j,  -67.7 + 16.1j,
        0 + 0j,      62.2 + 0j,   23.1 + 6.28j,   35.3 - 2.79j,
        0 + 0j,         0 + 0j,      32.4 + 0j, -27.3 - 0.294j,
        0 + 0j,         0 + 0j,         0 + 0j,     -6.71 + 0j,

>>> Q = Res["Householderq"]; Q.show("Q")
Q:
 -0.0308 - 0.382j,    0.535 - 0.175j,    0.480 + 0.242j,    0.392 - 0.307j,
  -0.403 - 0.435j,   -0.303 + 0.287j,  -0.0459 - 0.410j,    0.526 + 0.164j,
  -0.445 - 0.520j, -0.0686 - 0.0850j,   -0.303 + 0.514j,  -0.402 + 0.0392j,
 -0.0636 - 0.170j,    0.422 + 0.565j,    0.255 - 0.345j,  -0.527 + 0.0840j,

>>> Res["Hqnonzeros"].show("Hqnonzeros")
Hqnonzeros:
 -0.0308 - 0.382j,    0.535 - 0.175j,    0.480 + 0.242j,    0.392 - 0.307j,
  -0.403 - 0.435j,   -0.303 + 0.287j,  -0.0459 - 0.410j,    0.526 + 0.164j,
  -0.445 - 0.520j, -0.0686 - 0.0850j,   -0.303 + 0.514j,  -0.402 + 0.0392j,
 -0.0636 - 0.170j,    0.422 + 0.565j,    0.255 - 0.345j,  -0.527 + 0.0840j,

>>> (Q.T * Q.conjugate()).show("Q.T * Q (should be an identity matrix)")
Q.T * Q (should be an identity matrix):
            1.00 + 0j,         0 + 1.40E-36j,        -1.60E-36 + 0j,  1.10E-36 + 7.00E-37j,
        0 - 1.40E-36j,             1.00 + 0j,  1.40E-36 - 2.00E-36j, -4.00E-36 + 3.00E-36j,
       -1.60E-36 + 0j,  1.40E-36 + 2.00E-36j,             1.00 + 0j, -3.00E-36 - 1.00E-36j,
 1.10E-36 - 7.00E-37j, -4.00E-36 - 3.00E-36j, -3.00E-36 + 1.00E-36j,             1.00 + 0j,

>>> (Q * R * P2).show("Q * R * P2 (should be equal to A)")
Q * R * P2 (should be equal to A):
45.0 + 7.50j, 2.90 + 36.0j, 11.0 + 13.0j, 37.0 + 37.0j,
13.0 + 29.0j, 38.0 + 41.0j, 22.0 + 44.0j, 28.0 + 20.0j,
32.0 + 9.00j, 42.0 + 49.0j, 47.0 + 11.0j, 32.0 + 49.0j,
34.0 + 42.0j, 6.00 + 16.0j, 20.0 + 38.0j, 22.0 + 17.0j,

>>> Res["Inverse"].show("Inverse of A")
Inverse of A:
   0.0516 + 0.0468j,    0.0667 - 0.0273j, -0.0516 + 0.000462j,   -0.0635 - 0.0282j,
   0.0449 + 0.0423j,    0.0801 - 0.0400j, -0.0447 + 0.000795j,  -0.0814 - 0.00721j,
  -0.0583 - 0.0458j,   -0.0783 + 0.0245j,   0.0599 + 0.00584j,    0.0786 + 0.0125j,
  -0.0338 - 0.0465j,   -0.0674 + 0.0325j,    0.0409 - 0.0104j,    0.0738 + 0.0219j,

>>> (A * Res["Inverse"]).show("A * Inverse (should be an identity matrix)")
A * Inverse (should be an identity matrix):
     1.00 - 2.00E-35j, -2.00E-35 - 2.00E-35j,  1.00E-35 + 2.00E-35j,         1.00E-35 + 0j,
 1.00E-36 - 1.00E-35j,      1.00 + 2.00E-36j,  2.00E-35 + 1.30E-35j, -1.00E-35 + 1.00E-35j,
        0 - 5.00E-35j, -4.00E-35 - 1.00E-35j,      1.00 + 2.00E-35j,         0 + 2.00E-35j,
-8.00E-36 - 1.00E-35j, -1.00E-35 + 8.00E-36j,         0 - 1.80E-35j,      1.00 - 1.00E-35j,
```

6.7.7 QR Decomposition with full Pivoting

`ctx.mat_full_piv_householder_qr`(*matA*, *Query*, *matB*, *threshold*)

Returns the QR decomposition (with full pivoting) of the general matrix *matA* such that`PAP'`` = QR` by using Householder transformations. Here, P and P' are permutation matrices, Q is a unitary matrix and R is an upper triangular matrix.

Writing `matA.FullPivHouseholderQR(Query, matB, threshold)` has the same effect

See also Eigen [223], Wikipedia [1429], Wikipedia [1423].

Parameters:

Query
Required. A string specifying which items of the result section should be computed.

B
Optional. A general n-by-m matrix of the same type as A. You need to specify B only if you want to solve the linear equation $AX = B$

threshold
Optional. The threshold that will be used by certain methods such as rank().

Results:

info
An integer indicating whether the decompsition was successful(=0) or not(=1).

dimofkernel
An integer returning the dimension of the kernel of A.

rank
An integer returning the rank of A, which need to determine when pivots are to be considered nonzero. This is not used for the QR decomposition itself.

nonzeropivots
An integer returning the number of non-zero ivots in the decomposition.

isinjective
A boolean indicating whether A is injective.

isinvertible
A boolean indicating whether A is invertible.

issurjective
A boolean indicating whether A is surjective.

signdet
A scalar of a return type matching A. The sign of the determinant of A.

absdet
A scalar of a return type matching A. The absolute value of the determinant of A.

logabsdet
A scalar of a return type matching A. The logarithm of the absolute value of the determinant of A.

maxpivot
A scalar of the same return type as det. The absolute value of the biggest pivot, i.e. the biggest diagonal coefficient of R.

X
A general matrix of the same type and dimension as B. The solution to $AX = B$.

Inv
A square matrix of the same type and dimension as A. The inverse of A, A^{-1}.

P
A square matrix of the same type and dimension as A. The matrix P contains the column permutation matrix.

P'
A square matrix of the same type and dimension as A. The matrix P' contains the rows transpositions matrix.

Q
A square matrix of the same type and dimension as A. The matrix Q as a sequence of householder transformations.

R
A square matrix of the same type and dimension as A, containing the matrix R.

QR
A square matrix of the same type and dimension as A, containing the matrix QR.

This class performs a rank-revealing QR decomposition of a matrix A into matrices P, P', Q and R such that`PAP' = QR` by using Householder transformations. Here, P and P' are permutation matrices, Q a unitary matrix and R an upper triangular matrix.

This decomposition performs full pivoting in order to be rank-revealing and achieve optimal numerical stability. The trade-off is that it is slower than HouseholderQR and ColPivHouseholderQR.

solve: This method finds a solution x to the equation Ax=b, where A is the matrix of which this is the QR decomposition, if any exists.

Parameters: b the right-hand-side of the equation to solve.

Returns the exact or least-square solution if the rank is greater or equal to the number of columns of A, and an arbitrary solution otherwise. Note: The case where b is a matrix is not yet implemented. Also, this code is space inefficient.This method just tries to find as good a solution as possible. If you want to check whether a solution exists or if it is accurate, just call this function to get a result and then compute the error of this result, or use MatrixBase::isApprox() directly, for instance like this:

bool a_solution_exists = (A*result).isApprox(b, precision);

This method avoids dividing by zero, so that the non-existence of a solution doesn't by itself mean that you'll get inf or nan values. If there exists more than one solution, this method will arbitrarily choose one.

6.7.7.1 Example for a real matrix

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableRandomA6x6", ""); A.show("A")

>>> # This needs to be a square matrix
A:
  48,   43,   31,   19,   14,   24,
  46,   10,   20,  4.6,   14,   10,
  27,   39,   13,   34,   29,   37,
 7.1,   42,   15,  2.8,   35,   23,
  23,   50,   42, 0.44,   42,   23,
  12,   50,  1.2,   46,   36,   47,

>>> B = ctx.read_from_sqlite(mp14.dbpath(), "DecTableB6x6", ""); B.show("B")
B:
911, 912, 913, 914, 915, 916,
921, 922, 923, 924, 925, 926,
931, 932, 933, 934, 935, 936,
941, 942, 943, 944, 945, 946,
951, 952, 953, 954, 955, 956,
961, 962, 963, 964, 965, 966,

>>> Query = "isinjective, isinvertible, issurjective, dimofkernel, rank, nonzeropivots, "
>>> Query += "absdet, logabsdet, maxpivot, QR, Q, Permcols, X, Inverse"

>>> Res = A.eigen_fullPivHouseholderQr2(Query, B)
```

(continues on next page)

(continued from previous page)

```
>>> print("isinjective  : ", Res["isinjective"])
isinjective  :  True
>>> print("isinvertible : ", Res["isinvertible"])
isinvertible :  True
>>> print("issurjective : ", Res["issurjective"])
issurjective :  True

>>> print("dimofkernel  : ", Res["dimofkernel"])
dimofkernel  :  0
>>> print("rank         : ", Res["rank"])
rank         :  6
>>> print("nonzeropivots: ", Res["nonzeropivots"])
nonzeropivots:  6

>>> print("absdet     : ", Res["absdet"])
absdet     :  48772174.207999999999999999999999990
>>> print("logabsdet  : ", Res["logabsdet"])
logabsdet  :  17.702670507541421335076110204553151 5
>>> print("maxpivot   : ", Res["maxpivot"])
maxpivot   :  101.16323442832381088439063261595990 8

>>> Res["X"].show("X")
X:
 21.6,  21.7,  21.7,  21.7,  21.7,  21.8,
 8.21,  8.22,  8.22,  8.23,  8.23,  8.24,
-20.5, -20.6, -20.6, -20.6, -20.6, -20.6,
-15.3, -15.3, -15.4, -15.4, -15.4, -15.4,
 16.9,  16.9,  17.0,  17.0,  17.0,  17.0,
 8.73,  8.76,  8.78,  8.80,  8.82,  8.85,

>>> (A * Res["X"]).show("A * X (should be equal to B)")
A * X (should be equal to B):
911, 912, 913, 914, 915, 916,
921, 922, 923, 924, 925, 926,
931, 932, 933, 934, 935, 936,
941, 942, 943, 944, 945, 946,
951, 952, 953, 954, 955, 956,
961, 962, 963, 964, 965, 966,

>>> (B - A * Res["X"]).show("B - A * X (should be a zero matrix)")
B - A * X (should be a zero matrix):
  -6E-33,    2E-33,    5E-33,   -1E-33, -1.3E-32,   -4E-33,
  -6E-33,   -1E-33,   -1E-33,   -5E-33, -1.7E-32,   -1E-33,
   9E-33,    4E-33,  1.0E-32,    9E-33,    1E-33,  1.0E-32,
   3E-33,   -1E-33,    1E-33,   -4E-33,   -5E-33,    3E-33,
   5E-33,   -2E-33,    6E-33,   -3E-33,   -8E-33,    7E-33,
 1.3E-32,    6E-33,  1.5E-32,  1.0E-32,    5E-33,  1.6E-32,

>>> P2 = Res["Permcols"].eigen_inverse(); P2.show("P2^-1")
P2^-1:
0, 1, 0, 0, 0, 0,
1, 0, 0, 0, 0, 0,
0, 0, 0, 1, 0, 0,
0, 0, 0, 0, 1, 0,
0, 0, 1, 0, 0, 0,
0, 0, 0, 0, 0, 1,

>>> R = Res["QR"].upper_triangle(); R.show("R")
R:
  -101,  -55.6,  -45.8,  -71.6,  -47.7,  -69.6,
     0,  -52.7,  -1.51,   4.47,  -22.6, 0.0539,
     0,      0,  -39.6,   4.55,   24.8,  -20.5,
     0,      0,      0,   18.7, -0.371,   6.51,
     0,      0,      0,      0,   10.8,  -1.75,
     0,      0,      0,      0,      0,   1.14,
```

(continues on next page)

(continued from previous page)

```
>>> Q = Res["Q"]; Q.show("Q")
Q:
 -0.425,  -0.462,  0.0289,   0.774,  0.0677,  0.0413,
-0.0989,  -0.768,  0.0273,  -0.546,   0.234,   0.215,
 -0.386,  -0.106,  -0.409,  -0.199,  -0.223,  -0.764,
 -0.415,   0.303,   0.398,  -0.113,   0.717,  -0.225,
 -0.494,  0.0850,   0.557,  -0.197,  -0.609,   0.169,
 -0.494,   0.294,  -0.602,  -0.109,  0.0756,   0.538,

>>> (Q.T * Q).show("Q.T * Q (should be an identity matrix)")
Q.T * Q (should be an identity matrix):
     1.00,     0E-36,    -2E-36,  -1.8E-36,  -1.5E-36,     0E-36,
    0E-36,      1.00,     2E-36,  -1.9E-36,   2.5E-36,    -1E-36,
   -2E-36,     2E-36,      1.00,     7E-37,   3.1E-36,     0E-36,
 -1.8E-36,  -1.9E-36,     7E-37,      1.00, -2.09E-36,     0E-37,
 -1.5E-36,   2.5E-36,   3.1E-36, -2.09E-36,      1.00,  -2.2E-36,
    0E-36,    -1E-36,     0E-36,     0E-37,  -2.2E-36,      1.00,

>>> (Q * R * P2).show("Q * R * P2 (should be equal to A, except possible permutation of rows)")
Q * R * P2 (should be equal to A):
 48.0,  43.0,  31.0,  19.0,  14.0,  24.0,
 46.0,  10.0,  20.0,  4.60,  14.0,  10.0,
 27.0,  39.0,  13.0,  34.0,  29.0,  37.0,
 7.10,  42.0,  15.0,  2.80,  35.0,  23.0,
 23.0,  50.0,  42.0, 0.440,  42.0,  23.0,
 12.0,  50.0,  1.20,  46.0,  36.0,  47.0,

>>> Res["Inverse"].show("Inverse of A")
Inverse of A:
 0.0113,  0.0426, -0.0633, 0.00768, -0.0128,  0.0375,
 0.0459,  0.0319,  -0.201, -0.0115,  0.0136,   0.127,
-0.0121, -0.0523,   0.129, -0.0340,  0.0322, -0.0835,
0.00719,  0.0757,  -0.283,  -0.141,  0.0901,   0.228,
-0.0289,  0.0940,  -0.220, -0.0636,  0.0627,   0.169,
-0.0363,  -0.190,   0.672,   0.198,  -0.148,  -0.473,

>>> (A * Res["Inverse"]).show("A * Inverse (should be an identity matrix)")
A * Inverse (should be an identity matrix):
   1.00,   2E-35,   1E-34,   0E-35,   1E-35,   0E-34,
  9E-36,    1.00,  -3E-35,   0E-35,  -1E-35,   1E-35,
  1E-35,   3E-35,    1.00,  -3E-35,   3E-35,   0E-34,
  3E-36,   2E-35,   1E-34,    1.00,  -1E-35,   0E-34,
1.3E-35,   4E-35,   0E-34,   1E-35,    1.00,   1E-34,
  2E-35,   4E-35,  -2E-34,  -3E-35,   4E-35,    1.00,
```

6.7.7.2 Example for a complex matrix

```
>>> from xlcalcnet import *
>>> ctx = mp14.dcf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecCplxTableB6x6", "")
>>> A = A.top_left_corner(4,4); A.show("A")

>>> # This needs to be an invertible matrix, `A^{-1}`
A:
45.0 + 7.50j, 2.90 + 36.0j, 11.0 + 13.0j, 37.0 + 37.0j,
13.0 + 29.0j, 38.0 + 41.0j, 22.0 + 44.0j, 28.0 + 20.0j,
32.0 + 9.00j, 42.0 + 49.0j, 47.0 + 11.0j, 32.0 + 49.0j,
34.0 + 42.0j, 6.00 + 16.0j, 20.0 + 38.0j, 22.0 + 17.0j,

>>> B = ctx.read_from_sqlite(mp14.dbpath(), "DecCplxTableA6x6", "")
>>> B = B.top_left_corner(4,4); B.show("B")
B:
11.0 + 31.0j, 12.0 + 32.0j, 13.0 + 33.0j, 14.0 + 34.0j,
21.0 + 41.0j, 22.0 + 42.0j, 23.0 + 43.0j, 24.0 + 44.0j,
```

(continues on next page)

(continued from previous page)

```
31.0 + 51.0j, 32.0 + 52.0j, 33.0 + 53.0j, 34.0 + 54.0j,
41.0 + 61.0j, 42.0 + 62.0j, 43.0 + 63.0j, 44.0 + 64.0j,

>>> Query = "isinjective, isinvertible, issurjective, dimofkernel, rank, nonzeropivots, "
>>> Query += "absdet, logabsdet, maxpivot, QR, Q, Permcols, X, Inverse"

>>> Res = A.eigen_fullPivHouseholderQr2(Query, B)

>>> print("isinjective  : ", Res["isinjective"])
isinjective  :  True
>>> print("isinvertible : ", Res["isinvertible"])
isinvertible :  True
>>> print("issurjective : ", Res["issurjective"])
issurjective :  True

>>> print("dimofkernel  : ", Res["dimofkernel"])
dimofkernel  :  0
>>> print("rank         : ", Res["rank"])
rank         :  4
>>> print("nonzeropivots: ", Res["nonzeropivots"])
nonzeropivots:  4

>>> print("absdet     : ", Res["absdet"])
absdet     :  1277744.9873472014525224864573725287 2
>>> print("logabsdet  : ", Res["logabsdet"])
logabsdet  :  14.060607353591879183379444362428081 1
>>> print("maxpivot   : ", Res["maxpivot"])
maxpivot   :  101.16323442832381088439063261595990 8

>>> Res["X"].show("X")
X:
-0.869 - 3.37j, -0.858 - 3.37j, -0.846 - 3.38j, -0.835 - 3.38j,
 -1.82 - 3.22j,  -1.82 - 3.22j,  -1.82 - 3.23j,  -1.81 - 3.23j,
  2.15 + 3.53j,   2.15 + 3.53j,   2.16 + 3.53j,   2.16 + 3.53j,
  1.81 + 3.52j,   1.82 + 3.53j,   1.84 + 3.54j,   1.86 + 3.55j,

>>> (A * Res["X"]).show("A * X (should be equal to B)")
A * X (should be equal to B):
11.0 + 31.0j, 12.0 + 32.0j, 13.0 + 33.0j, 14.0 + 34.0j,
21.0 + 41.0j, 22.0 + 42.0j, 23.0 + 43.0j, 24.0 + 44.0j,
31.0 + 51.0j, 32.0 + 52.0j, 33.0 + 53.0j, 34.0 + 54.0j,
41.0 + 61.0j, 42.0 + 62.0j, 43.0 + 63.0j, 44.0 + 64.0j,

>>> (B - A * Res["X"]).show("B - A * X (should be a zero matrix)")
B - A * X (should be a zero matrix):
 9.00E-34 - 1.00E-33j,  1.50E-33 - 1.00E-33j,  2.00E-34 + 2.00E-33j,  9.00E-34 + 1.00E-33j,
-4.00E-34 - 3.00E-33j,  6.00E-34 - 2.00E-33j,  4.00E-34 - 3.00E-33j,                0 + 0j,
 1.00E-33 - 4.00E-33j,         0 - 5.00E-33j,  1.00E-33 - 4.00E-33j,  2.00E-33 - 4.00E-33j,
        6.00E-34 + 0j,         3.00E-34 + 0j, -1.00E-34 + 1.00E-33j,        -6.00E-34 + 0j,

>>> P2 = Res["Permcols"].eigen_inverse(); P2.show("P2^-1")
P2^-1:
   0 + 0j, 1.00 + 0j,    0 + 0j,    0 + 0j,
1.00 + 0j,    0 + 0j,    0 + 0j,    0 + 0j,
   0 + 0j,    0 + 0j,    0 + 0j, 1.00 + 0j,
   0 + 0j,    0 + 0j, 1.00 + 0j,    0 + 0j,

>>> R = Res["QR"].upper_triangle(); R.show("R")
R:
   -94.3 + 0j, -50.3 + 26.6j, -79.3 + 14.6j, -67.7 + 16.1j,
       0 + 0j,    -62.2 + 0j, -23.1 - 6.28j, -35.3 + 2.79j,
       0 + 0j,        0 + 0j,    -32.4 + 0j, 27.3 + 0.294j,
       0 + 0j,        0 + 0j,        0 + 0j,     6.71 + 0j,

>>> Q = Res["Q"]; Q.show("Q")
Q:
```

(continues on next page)

(continued from previous page)

```
-0.0308 - 0.382j,  -0.535 + 0.175j,  -0.480 - 0.242j,  -0.392 + 0.307j,
 -0.403 - 0.435j,   0.303 - 0.287j,  0.0459 + 0.410j,  -0.526 - 0.164j,
 -0.445 - 0.520j, 0.0686 + 0.0850j,   0.303 - 0.514j,  0.402 - 0.0392j,
-0.0636 - 0.170j,  -0.422 - 0.565j,  -0.255 + 0.345j,  0.527 - 0.0840j,

>>> (Q.T * Q.conjugate()).show("Q.T * Q (should be an identity matrix)")
Q.T * Q (should be an identity matrix):
           1.00 + 0j,  1.00E-36 - 9.00E-37j,  1.80E-36 + 4.00E-37j,  6.00E-37 - 2.00E-37j,
 1.00E-36 + 9.00E-37j,             1.00 + 0j, -1.50E-36 + 1.00E-36j,                0 + 0j,
 1.80E-36 - 4.00E-37j, -1.50E-36 - 1.00E-36j,             1.00 + 0j, -1.00E-36 - 2.00E-36j,
 6.00E-37 + 2.00E-37j,                0 + 0j, -1.00E-36 + 2.00E-36j,             1.00 + 0j,

>>> (Q * R * P2).show("Q * R * P2 (should be equal to A, except possible permutation of rows)")
Q * R * P2 (should be equal to A, except possible permutation of rows):
45.0 + 7.50j, 2.90 + 36.0j, 11.0 + 13.0j, 37.0 + 37.0j,
13.0 + 29.0j, 38.0 + 41.0j, 22.0 + 44.0j, 28.0 + 20.0j,
32.0 + 9.00j, 42.0 + 49.0j, 47.0 + 11.0j, 32.0 + 49.0j,
34.0 + 42.0j, 6.00 + 16.0j, 20.0 + 38.0j, 22.0 + 17.0j,

>>> Res["Inverse"].show("Inverse of A")
Inverse of A:
   0.0516 + 0.0468j,    0.0667 - 0.0273j, -0.0516 + 0.000462j,   -0.0635 - 0.0282j,
   0.0449 + 0.0423j,    0.0801 - 0.0400j, -0.0447 + 0.000795j,  -0.0814 - 0.00721j,
  -0.0583 - 0.0458j,   -0.0783 + 0.0245j,   0.0599 + 0.00584j,    0.0786 + 0.0125j,
  -0.0338 - 0.0465j,   -0.0674 + 0.0325j,    0.0409 - 0.0104j,    0.0738 + 0.0219j,

>>> (A * Res["Inverse"]).show("A * Inverse (should be an identity matrix)")
A * Inverse (should be an identity matrix):
     1.00 + 1.00E-35j,         0 - 3.00E-35j, -1.00E-35 + 2.00E-35j, -2.00E-35 + 4.00E-35j,
 1.10E-35 - 2.00E-35j,      1.00 - 3.20E-35j,  3.00E-35 + 1.00E-35j,  4.00E-35 + 5.00E-35j,
 1.00E-35 - 7.00E-35j, -1.10E-34 - 5.00E-35j,      1.00 + 3.00E-35j,  5.00E-35 + 9.00E-35j,
 7.00E-36 - 1.00E-35j, -1.00E-35 - 1.80E-35j,  1.00E-35 - 9.00E-36j,      1.00 + 1.00E-35j,
```

6.7.8 Complete orthogonal decomposition (COD)

`ctx.mat_cod_householder_qr`(*matA*, *results*, *matB*)

Returns a rank-revealing complete orthogonal decomposition (COD) of the general matrix *matA* $= A$ into matrices P, Q, T, and Z such that

Writing `matA.CODHouseholderQR(results, matB)` has the same effect

$$\mathbf{A\,P} = \mathbf{Q} \begin{bmatrix} \mathbf{T} & \mathbf{0} \\ \mathbf{0} & \mathbf{0} \end{bmatrix} \mathbf{Z}$$

by using Householder transformations. Here, P is a permutation matrix, Q and Z are unitary matrices and T an upper triangular matrix of size rank-by-rank. A may be rank deficient.

See also Eigen [220], Wikipedia [1427], Wikipedia [1423].

Parameters:

Query
Required. A string specifying which items of the result section should be computed.

B
Optional. A general n-by-m matrix of the same type as A. You need to specify B only if you want to solve the linear equation $AX = B$

Results:

info
An integer indicating whether the decompsition was successful(=0) or not(=1).

dimofkernel
An integer returning the dimension of the kernel of A.

rank
An integer returning the rank of A, which need to determine when pivots are to be considered nonzero. This is not used for the QR decomposition itself.

nonzeropivots
An integer returning the number of non-zero ivots in the decomposition.

isinjective
A boolean indicating whether A is injective.

isinvertible
A boolean indicating whether A is invertible.

issurjective
A boolean indicating whether A is surjective.

signdet
A scalar of a return type matching A. The sign of the determinant of A.

absdet
A scalar of a return type matching A. The absolute value of the determinant of A.

logabsdet
A scalar of a return type matching A. The logarithm of the absolute value of the determinant of A.

maxpivot
A scalar of the same return type as det. The absolute value of the biggest pivot, i.e. the biggest diagonal coefficient of R.

X
A general matrix of the same type and dimension as B. The solution to $AX = B$.

pseudoInverse
A square matrix of the same type and dimension as A. The pseudo-inverse of A, A^{-1}.

P
A square matrix of the same type and dimension as A. The matrix P contains the column permutation matrix.

P'
A square matrix of the same type and dimension as A. The matrix P' contains the rows transpositions matrix.

T
A square matrix of the same type and dimension as A., containing the matrix Z.

Z
A square matrix of the same type and dimension as A, containing the matrix R.

QTZ
A square matrix of the same type and dimension as A, containing the matrix QTZ.

This class performs a a rank-revealing complete orthogonal decomposition (COD) of the general matrix *matA* $= A$ into matrices P, Q, T, and Z such that

$$\mathbf{A\,P} = \mathbf{Q} \begin{bmatrix} \mathbf{T} & \mathbf{0} \\ \mathbf{0} & \mathbf{0} \end{bmatrix} \mathbf{Z}$$

by using Householder transformations. Here, P is a permutation matrix, Q and Z are unitary matrices and T an upper triangular matrix of size rank-by-rank. A may be rank deficient.

solve: This method finds a solution x to the equation Ax=b, where A is the matrix of which this is the QR decomposition, if any exists.

Parameters: b the right-hand-side of the equation to solve.

Returns the exact or least-square solution if the rank is greater or equal to the number of columns of A, and an arbitrary solution otherwise. Note: The case where b is a matrix is not yet implemented. Also, this code is space inefficient.This method just tries to find as good a solution as possible. If you want to check whether a solution exists or if it is accurate, just call this function to get a result and then compute the error of this result, or use MatrixBase::isApprox() directly, for instance like this:

bool a_solution_exists = (A*result).isApprox(b, precision);

This method avoids dividing by zero, so that the non-existence of a solution doesn't by itself mean that you'll get inf or nan values. If there exists more than one solution, this method will arbitrarily choose one.

6.7.8.1 Example for a real matrix

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableRandomA6x6", ""); A.show("A")

>>> # This needs to be a square matrix
A:
  48,   43,   31,   19,   14,   24,
  46,   10,   20,  4.6,   14,   10,
  27,   39,   13,   34,   29,   37,
 7.1,   42,   15,  2.8,   35,   23,
  23,   50,   42, 0.44,   42,   23,
  12,   50,  1.2,   46,   36,   47,

>>> B = ctx.read_from_sqlite(mp14.dbpath(), "DecTableB6x6", ""); B.show("B")
B:
911, 912, 913, 914, 915, 916,
921, 922, 923, 924, 925, 926,
931, 932, 933, 934, 935, 936,
941, 942, 943, 944, 945, 946,
951, 952, 953, 954, 955, 956,
961, 962, 963, 964, 965, 966,
```

(continues on next page)

(continued from previous page)

```
>>> Query = "isinjective, isinvertible, issurjective, info, dimofkernel, rank, nonzeropivots, absdet, "
>>> Query += "logabsdet, maxpivot, QTZ, T, Z, Householderq, Hqnonzeros, Permcols, X, PseudoInverse"

>>> Res = A.eigen_COD2(Query, B)

>>> print("isinjective  : ", Res["isinjective"])
isinjective  :  True
>>> print("isinvertible : ", Res["isinvertible"])
isinvertible :  True
>>> print("issurjective : ", Res["issurjective"])
issurjective :  True

>>> print("info         : ", Res["info"])
dimofkernel  :  0
>>> print("dimofkernel  : ", Res["dimofkernel"])
dimofkernel  :  0
>>> print("rank         : ", Res["rank"])
rank         :  6
>>> print("nonzeropivots: ", Res["nonzeropivots"])
nonzeropivots:  6

>>> print("absdet     : ", Res["absdet"])
absdet     :  48772174.208000000000000000000000014
>>> print("logabsdet  : ", Res["logabsdet"])
logabsdet  :  17.702670507541421335076l102045531516
>>> print("maxpivot   : ", Res["maxpivot"])
maxpivot   :  101.16323442832381088439063261595990 8

>>> Res["X"].show("X")
X:
 21.6,  21.7,  21.7,  21.7,  21.7,  21.8,
 8.21,  8.22,  8.22,  8.23,  8.23,  8.24,
-20.5, -20.6, -20.6, -20.6, -20.6, -20.6,
-15.3, -15.3, -15.4, -15.4, -15.4, -15.4,
 16.9,  16.9,  17.0,  17.0,  17.0,  17.0,
 8.73,  8.76,  8.78,  8.80,  8.82,  8.85,

>>> (A * Res["X"]).show("A * X (should be equal to B)")
A * X (should be equal to B):
911, 912, 913, 914, 915, 916,
921, 922, 923, 924, 925, 926,
931, 932, 933, 934, 935, 936,
941, 942, 943, 944, 945, 946,
951, 952, 953, 954, 955, 956,
961, 962, 963, 964, 965, 966,

>>> (B - A * Res["X"]).show("B - A * X (should be a zero matrix)")
B - A * X (should be a zero matrix):
  -3E-33, -1.6E-32,   -5E-33, -1.7E-32,    4E-33,   -9E-33,
   7E-33,    6E-33,   -3E-33,   -5E-33,    7E-33,    9E-33,
   3E-33,   -4E-33,   -2E-33,   -8E-33,    2E-33,   -5E-33,
  -4E-33,   -7E-33,   -4E-33,   -8E-33,    2E-33, -1.3E-32,
  -8E-33, -1.2E-32, -1.1E-32, -1.8E-32,   -2E-33, -1.2E-32,
  -7E-33, -1.0E-32,   -6E-33, -1.0E-32,   -4E-33, -1.3E-32,

>>> P2 = Res["Permcols"].eigen_inverse(); P2.show("P2^-1")
P2^-1:
0, 1, 0, 0, 0, 0,
1, 0, 0, 0, 0, 0,
0, 0, 0, 1, 0, 0,
0, 0, 0, 0, 1, 0,
0, 0, 1, 0, 0, 0,
0, 0, 0, 0, 0, 1,

>>> Res["QTZ"].show("QTZ")
```

(continues on next page)

(continued from previous page)

```
QTZ:
   -101,   -55.6,   -45.8,   -71.6,   -47.7,   -69.6,
 0.0694,   -52.7,   -1.51,    4.47,   -22.6,  0.0539,
  0.271, -0.0112,   -39.6,    4.55,    24.8,   -20.5,
  0.291,  -0.252,  -0.279,   -18.7,   0.371,   -6.51,
  0.347,  -0.141,  -0.389,   0.443,   -10.8,    1.75,
  0.347,  -0.261,   0.427,   0.222, -0.0306,   -1.14,

>>> T = Res["T"].upper_triangle(); T.show("T")
T:
  -101,  -55.6,  -45.8,  -71.6,  -47.7,  -69.6,
     0,  -52.7,  -1.51,   4.47,  -22.6, 0.0539,
     0,      0,  -39.6,   4.55,   24.8,  -20.5,
     0,      0,      0,  -18.7,  0.371,  -6.51,
     0,      0,      0,      0,  -10.8,   1.75,
     0,      0,      0,      0,      0,  -1.14,

>>> Z = Res["Z"]; Z.show("Z")
Z:
1, 0, 0, 0, 0, 0,
0, 1, 0, 0, 0, 0,
0, 0, 1, 0, 0, 0,
0, 0, 0, 1, 0, 0,
0, 0, 0, 0, 1, 0,
0, 0, 0, 0, 0, 1,

>>> Q = Res["Householderq"]; Q.show("Q")
Q:
 -0.425,  -0.462,  0.0289,   0.774,  0.0677,  0.0413,
-0.0989,  -0.768,  0.0273,  -0.546,   0.234,   0.215,
 -0.386,  -0.106,  -0.409,  -0.199,  -0.223,  -0.764,
 -0.415,   0.303,   0.398,  -0.113,   0.717,  -0.225,
 -0.494,  0.0850,   0.557,  -0.197,  -0.609,   0.169,
 -0.494,   0.294,  -0.602,  -0.109,  0.0756,   0.538,

>>> Res["Hqnonzeros"].show("Hqnonzeros")
Hqnonzeros:
 -0.425,  -0.462,  0.0289,   0.774,  0.0677,  0.0413,
-0.0989,  -0.768,  0.0273,  -0.546,   0.234,   0.215,
 -0.386,  -0.106,  -0.409,  -0.199,  -0.223,  -0.764,
 -0.415,   0.303,   0.398,  -0.113,   0.717,  -0.225,
 -0.494,  0.0850,   0.557,  -0.197,  -0.609,   0.169,
 -0.494,   0.294,  -0.602,  -0.109,  0.0756,   0.538,

>>> (Q.T * Q).show("Q.T * Q (should be an identity matrix)")
Q.T * Q (should be an identity matrix):
     1.00,    -2E-36,    -1E-36,   3.3E-36,   1.6E-36,     1E-36,
   -2E-36,      1.00,    -2E-36,     3E-37,   2.0E-36,     2E-36,
   -1E-36,    -2E-36,      1.00,  -1.1E-36,    -2E-37,     0E-36,
  3.3E-36,     3E-37,  -1.1E-36,      1.00, -1.10E-36,    -6E-37,
  1.6E-36,   2.0E-36,    -2E-37, -1.10E-36,      1.00,    -9E-37,
    1E-36,     2E-36,     0E-36,    -6E-37,    -9E-37,      1.00,

>>> (Q * T * Z* P2).show("Q * T * Z * P2 (should be equal to A)")
Q * T * Z * P2 (should be equal to A):
 48.0,  43.0,  31.0,  19.0,  14.0,  24.0,
 46.0,  10.0,  20.0,  4.60,  14.0,  10.0,
 27.0,  39.0,  13.0,  34.0,  29.0,  37.0,
 7.10,  42.0,  15.0,  2.80,  35.0,  23.0,
 23.0,  50.0,  42.0, 0.440,  42.0,  23.0,
 12.0,  50.0,  1.20,  46.0,  36.0,  47.0,

>>> Res["PseudoInverse"].show("PseudoInverse")
PseudoInverse:
 0.0113,  0.0426, -0.0633, 0.00768, -0.0128,  0.0375,
 0.0459,  0.0319,  -0.201, -0.0115,  0.0136,   0.127,
```

(continues on next page)

(continued from previous page)

```
-0.0121, -0.0523,   0.129, -0.0340,  0.0322, -0.0835,
0.00719,  0.0757,  -0.283,  -0.141,  0.0901,   0.228,
-0.0289,  0.0940,  -0.220, -0.0636,  0.0627,   0.169,
-0.0363,  -0.190,   0.672,   0.198,  -0.148,  -0.473,

>>> (A * Res["PseudoInverse"]).show("A * PseudoInverse")
A * PseudoInverse:
   1.00,  -2E-35,   1E-34,  -1E-35,  -3E-35,  -1E-34,
  0E-36,    1.00,   0E-35,  -2E-35,   0E-35,  -1E-35,
  0E-35,   0E-35,    1.00,  -1E-35,  -1E-35,   0E-34,
 -7E-36,   0E-35,   0E-34,    1.00,  -1E-35,   0E-34,
1.3E-35,  -1E-35,   1E-34,  -3E-35,    1.00,   0E-34,
  0E-35,   1E-35,   0E-34,  -2E-35,  -2E-35,    1.00,
```

6.7.8.2 Example for a complex matrix

```
>>> from xlcalcnet import *
>>> ctx = mp14.dcf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecCplxTableB6x6", "")
>>> A = A.top_left_corner(4,4); A.show("A")

>>> # This needs to be an invertible matrix, `A^{-1}`
A:
45.0 + 7.50j, 2.90 + 36.0j, 11.0 + 13.0j, 37.0 + 37.0j,
13.0 + 29.0j, 38.0 + 41.0j, 22.0 + 44.0j, 28.0 + 20.0j,
32.0 + 9.00j, 42.0 + 49.0j, 47.0 + 11.0j, 32.0 + 49.0j,
34.0 + 42.0j, 6.00 + 16.0j, 20.0 + 38.0j, 22.0 + 17.0j,

>>> B = ctx.read_from_sqlite(mp14.dbpath(), "DecCplxTableA6x6", "")
>>> B = B.top_left_corner(4,4); B.show("B")
B:
11.0 + 31.0j, 12.0 + 32.0j, 13.0 + 33.0j, 14.0 + 34.0j,
21.0 + 41.0j, 22.0 + 42.0j, 23.0 + 43.0j, 24.0 + 44.0j,
31.0 + 51.0j, 32.0 + 52.0j, 33.0 + 53.0j, 34.0 + 54.0j,
41.0 + 61.0j, 42.0 + 62.0j, 43.0 + 63.0j, 44.0 + 64.0j,

>>> Query = "isinjective, isinvertible, issurjective, info, dimofkernel, rank, nonzeropivots, absdet, "
>>> Query += "logabsdet, maxpivot, QTZ, T, Z, Householderq, Hqnonzeros, Permcols, X, PseudoInverse"

>>> Res = A.eigen_COD2(Query, B)

>>> print("isinjective  : ", Res["isinjective"])
isinjective  :  True
>>> print("isinvertible : ", Res["isinvertible"])
isinvertible :  True
>>> print("issurjective : ", Res["issurjective"])
issurjective :  True

>>> print("info         : ", Res["info"])
dimofkernel  :  0
>>> print("dimofkernel  : ", Res["dimofkernel"])
dimofkernel  :  0
>>> print("rank         : ", Res["rank"])
rank         :  4
>>> print("nonzeropivots: ", Res["nonzeropivots"])
nonzeropivots:  4

>>> print("absdet     : ", Res["absdet"])
absdet     :  1277744.9873472014525224864573725287 4
>>> print("logabsdet  : ", Res["logabsdet"])
logabsdet  :  14.060607353591879183379444362428081 2
>>> print("maxpivot   : ", Res["maxpivot"])
maxpivot   :  94.267756947961798843331053375853945 0
```

(continues on next page)

(continued from previous page)

```
>>> Res["X"].show("X")
X:
-0.869 - 3.37j, -0.858 - 3.37j, -0.846 - 3.38j, -0.835 - 3.38j,
 -1.82 - 3.22j,  -1.82 - 3.22j,  -1.82 - 3.23j,  -1.81 - 3.23j,
  2.15 + 3.53j,   2.15 + 3.53j,   2.16 + 3.53j,   2.16 + 3.53j,
  1.81 + 3.52j,   1.82 + 3.53j,   1.84 + 3.54j,   1.86 + 3.55j,

>>> (A * Res["X"]).show("A * X (should be equal to B)")
A * X (should be equal to B):
11.0 + 31.0j, 12.0 + 32.0j, 13.0 + 33.0j, 14.0 + 34.0j,
21.0 + 41.0j, 22.0 + 42.0j, 23.0 + 43.0j, 24.0 + 44.0j,
31.0 + 51.0j, 32.0 + 52.0j, 33.0 + 53.0j, 34.0 + 54.0j,
41.0 + 61.0j, 42.0 + 62.0j, 43.0 + 63.0j, 44.0 + 64.0j,

>>> (B - A * Res["X"]).show("B - A * X (should be a zero matrix)")
B - A * X (should be a zero matrix):
 9.00E-34 + 1.00E-33j,  8.00E-34 - 1.00E-33j,         2.00E-34 + 0j,  1.10E-33 - 1.00E-33j,
 6.00E-34 - 1.00E-33j,  2.00E-34 - 1.00E-33j, -5.00E-34 - 3.00E-33j,  4.00E-34 - 1.00E-33j,
 1.00E-33 - 4.00E-33j,  1.00E-33 - 3.00E-33j,  1.00E-33 - 2.00E-33j,  1.00E-33 - 3.00E-33j,
 3.00E-34 + 1.00E-33j,         5.00E-34 + 0j,        -6.00E-34 + 0j,        -5.00E-34 + 0j,

>>> P2 = Res["Permcols"].eigen_inverse(); P2.show("P2^-1")
P2^-1:
   0 + 0j, 1.00 + 0j,    0 + 0j,    0 + 0j,
1.00 + 0j,    0 + 0j,    0 + 0j,    0 + 0j,
   0 + 0j,    0 + 0j,    0 + 0j, 1.00 + 0j,
   0 + 0j,    0 + 0j, 1.00 + 0j,    0 + 0j,

>>> Res["QTZ"].show("QTZ")
QTZ:
     -94.3 + 0j,   -50.3 + 26.6j,   -79.3 + 14.6j,   -67.7 + 16.1j,
 0.481 + 0.244j,       62.2 + 0j,    23.1 + 6.28j,    35.3 - 2.79j,
 0.544 + 0.303j,  0.238 + 0.130j,       32.4 + 0j,  -27.3 - 0.294j,
 0.108 + 0.125j, -0.162 - 0.347j, -0.360 + 0.302j,      -6.71 + 0j,

>>> T = Res["T"].upper_triangle(); T.show("T")
T:
    -94.3 + 0j,  -50.3 + 26.6j,  -79.3 + 14.6j,  -67.7 + 16.1j,
        0 + 0j,      62.2 + 0j,   23.1 + 6.28j,   35.3 - 2.79j,
        0 + 0j,         0 + 0j,      32.4 + 0j, -27.3 - 0.294j,
        0 + 0j,         0 + 0j,         0 + 0j,     -6.71 + 0j,

>>> Z = Res["Z"]; Z.show("Z")
Z:
1.00 + 0j,    0 + 0j,    0 + 0j,    0 + 0j,
   0 + 0j, 1.00 + 0j,    0 + 0j,    0 + 0j,
   0 + 0j,    0 + 0j, 1.00 + 0j,    0 + 0j,
   0 + 0j,    0 + 0j,    0 + 0j, 1.00 + 0j,

>>> Q = Res["Householderq"]; Q.show("Q")
Q:
 -0.0308 - 0.382j,    0.535 - 0.175j,    0.480 + 0.242j,    0.392 - 0.307j,
  -0.403 - 0.435j,   -0.303 + 0.287j,  -0.0459 - 0.410j,    0.526 + 0.164j,
  -0.445 - 0.520j, -0.0686 - 0.0850j,   -0.303 + 0.514j,  -0.402 + 0.0392j,
 -0.0636 - 0.170j,    0.422 + 0.565j,    0.255 - 0.345j,  -0.527 + 0.0840j,

>>> Res["Hqnonzeros"].show("Hqnonzeros")
Hqnonzeros:
 -0.0308 - 0.382j,    0.535 - 0.175j,    0.480 + 0.242j,    0.392 - 0.307j,
  -0.403 - 0.435j,   -0.303 + 0.287j,  -0.0459 - 0.410j,    0.526 + 0.164j,
  -0.445 - 0.520j, -0.0686 - 0.0850j,   -0.303 + 0.514j,  -0.402 + 0.0392j,
 -0.0636 - 0.170j,    0.422 + 0.565j,    0.255 - 0.345j,  -0.527 + 0.0840j,

>>> (Q.T * Q.conjugate()).show("Q.T * Q.conjugate() (should be an identity matrix)")
Q.T * Q.conjugate() (should be an identity matrix):
            1.00 + 0j,         0 + 1.40E-36j,        -1.60E-36 + 0j,  1.10E-36 + 7.00E-37j,
```

(continues on next page)

(continued from previous page)

```
        0 - 1.40E-36j,             1.00 + 0j,  1.40E-36 - 2.00E-36j, -4.00E-36 + 3.00E-36j,
       -1.60E-36 + 0j,  1.40E-36 + 2.00E-36j,             1.00 + 0j, -3.00E-36 - 1.00E-36j,
 1.10E-36 - 7.00E-37j, -4.00E-36 - 3.00E-36j, -3.00E-36 + 1.00E-36j,             1.00 + 0j,

>>> (Q * T * Z* P2).show("Q * T * Z * P2 (should be equal to A)")
Q * T * Z * P2 (should be equal to A):
45.0 + 7.50j, 2.90 + 36.0j, 11.0 + 13.0j, 37.0 + 37.0j,
13.0 + 29.0j, 38.0 + 41.0j, 22.0 + 44.0j, 28.0 + 20.0j,
32.0 + 9.00j, 42.0 + 49.0j, 47.0 + 11.0j, 32.0 + 49.0j,
34.0 + 42.0j, 6.00 + 16.0j, 20.0 + 38.0j, 22.0 + 17.0j,

>>> Res["PseudoInverse"].show("PseudoInverse")
PseudoInverse:
   0.0516 + 0.0468j,    0.0667 - 0.0273j, -0.0516 + 0.000462j,   -0.0635 - 0.0282j,
   0.0449 + 0.0423j,    0.0801 - 0.0400j, -0.0447 + 0.000795j,  -0.0814 - 0.00721j,
  -0.0583 - 0.0458j,   -0.0783 + 0.0245j,   0.0599 + 0.00584j,    0.0786 + 0.0125j,
  -0.0338 - 0.0465j,   -0.0674 + 0.0325j,    0.0409 - 0.0104j,    0.0738 + 0.0219j,

>>> (A * Res["PseudoInverse"]).show("A * PseudoInverse")
A * PseudoInverse:
     1.00 - 2.00E-35j, -2.00E-35 - 2.00E-35j,  1.00E-35 + 2.00E-35j,         1.00E-35 + 0j,
 1.00E-36 - 1.00E-35j,      1.00 + 2.00E-36j,  2.00E-35 + 1.30E-35j, -1.00E-35 + 1.00E-35j,
        0 - 5.00E-35j, -4.00E-35 - 1.00E-35j,      1.00 + 2.00E-35j,         0 + 2.00E-35j,
-8.00E-36 - 1.00E-35j, -1.00E-35 + 8.00E-36j,         0 - 1.80E-35j,      1.00 - 1.00E-35j,
```

6.8 Singular Value and Eigen (selfadjoint) decompositions

6.8.1 Singular Value Decomposition, only singular values

`ctx.mat_jacobi_svd`(*matA*, *Query*)

Returns the two-sided Jacobi SVD decomposition of a rectangular matrix.

Writing `matA.JacobiSVD(Query)` has the same effect

See also: Wikipedia [1411].

Parameters:

Query
Required. A string specifying which items of the result section should be computed.

Results:

absdet
A scalar of a return type matching A. The absolute value of the determinant of A.

rank
An integer. The rank of A (equal to the number of non-zero singular values)

SV
A vector of the same type`A`. The singular values A (see below).

The singular value decomposition of an $m \times n$ complex matrix $\mathbf{M}$ is a factorization of the form $\mathbf{M} = \mathbf{U\Sigma V}^*$, where $\mathbf{U}$ is an $m \times m$ complex unitary matrix, $\mathbf{\Sigma}$ is an $m \times n$ rectangular diagonal matrix with non-negative real numbers on the diagonal, and $\mathbf{V}$ is an $n \times n$ complex unitary matrix. If $\mathbf{M}$ is real, $\mathbf{U}$ and $\mathbf{V}^\mathsf{T} = \mathbf{V}^*$ are real orthogonal matrices.

The diagonal entries $\sigma_i = \Sigma_{ii}$ of $\mathbf{\Sigma}$ are known as the singular values of $\mathbf{M}$. The number of non-zero singular values is equal to the rank of $\mathbf{M}$. The columns of $\mathbf{U}$ and the columns of $\mathbf{V}$ are called the left-singular vectors and right-singular vectors of $\mathbf{M}$, respectively. These vectors are related by

$$\mathbf{Mv} = \sigma\mathbf{u} \text{ and } \mathbf{M}^*\mathbf{u} = \sigma\mathbf{v}.$$

The singular values are the square roots of non-negative eigenvalues of $\mathbf{M}^*\mathbf{M}$.

Matrix transpose and conjugate do not alter singular values.

$$\sigma_i(A) = \sigma_i\left(A^\mathsf{T}\right) = \sigma_i\left(A^*\right) = \sigma_i\left(\bar{A}\right).$$

For any unitary $U \in \mathbb{C}^{m\times m}, V \in \mathbb{C}^{n\times n}$.

$$\sigma_i(A) = \sigma_i(UAV).$$

Relation to eigenvalues:

$$\sigma_i^2(A) = \lambda_i\left(AA^*\right) = \lambda_i\left(A^*A\right).$$

The singular value decomposition is very general in the sense that it can be applied to any $m \times n$ matrix, whereas the eigenvalue decomposition can only be applied to diagonalizable matrices. Nevertheless, the two decompositions are related.

Given an SVD of M, as described above, the following two relations hold:

$$\mathbf{M}^*\mathbf{M} = \mathbf{V\Sigma}^*\mathbf{U}^*\,\mathbf{U\Sigma V}^* = \mathbf{V}(\mathbf{\Sigma}^*\mathbf{\Sigma})\mathbf{V}^*$$

$$\mathbf{MM}^* = \mathbf{U\Sigma V}^*\,\mathbf{V\Sigma}^*\mathbf{U}^* = \mathbf{U}(\mathbf{\Sigma\Sigma}^*)\mathbf{U}^*$$

The right-hand sides of these relations describe the eigenvalue decompositions of the left-hand sides. Consequently:

The columns of $\mathbf{V}$ (right-singular vectors) are eigenvectors of $\mathbf{M}^*\mathbf{M}$.

The columns of $\mathbf{U}$ (left-singular vectors) are eigenvectors of $\mathbf{M}\mathbf{M}^*$.

The non-zero elements of $\mathbf{\Sigma}$ (non-zero singular values) are the square roots of the non-zero eigenvalues of $\mathbf{M}^*\mathbf{M}$ or $\mathbf{M}\mathbf{M}^*$.

6.8.1.1 Example for a real matrix: only singular values

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableRandomA6x6", ""); A.show("A")
A:
  48,   43,   31,   19,   14,   24,
  46,   10,   20,  4.6,   14,   10,
  27,   39,   13,   34,   29,   37,
 7.1,   42,   15,  2.8,   35,   23,
  23,   50,   42, 0.44,   42,   23,
  12,   50,  1.2,   46,   36,   47,

>>> Query = "rank, nonzeros, absdet, logabsdet, S, SPlus"
>>> Res = A.eigen_jacobiSvd2(Query)

>>> print("rank         : ", Res["rank"])
rank         :  6
>>> print("nonzeros     : ", Res["nonzeros"])
nonzeropivots:  6

print("absdet   : ", Res["absdet"])
absdet   :  48772174.208000000000000000000000149
print("logabsdet: ", Res["logabsdet"])
logabsdet:  17.702670507541421335076102045531518
print()

print("rcond   : ", Res["rcond"])  # TBD
print("isinvertible: ", Res["isinvertible"])  # TBD
print()

>>> Res["S"].show("Singular values")
Singular values:
  169,
 58.6,
 44.1,
 15.2,
 7.75,
0.950,

>>> Res["SPlus"].show("SPlus")
SPlus:
0.00593,
 0.0171,
 0.0227,
 0.0657,
  0.129,
   1.05,
```

6.8.1.2 Example for a complex matrix: only singular values

```
>>> from xlcalcnet import *
>>> ctx = mp14.dcf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecCplxTableB6x6", "")
>>> A = A.top_left_corner(6,4); A.show("A")
A:
45.0 + 7.50j, 2.90 + 36.0j, 11.0 + 13.0j, 37.0 + 37.0j,
13.0 + 29.0j, 38.0 + 41.0j, 22.0 + 44.0j, 28.0 + 20.0j,
32.0 + 9.00j, 42.0 + 49.0j, 47.0 + 11.0j, 32.0 + 49.0j,
```

(continues on next page)

(continued from previous page)

```
34.0 + 42.0j, 6.00 + 16.0j, 20.0 + 38.0j, 22.0 + 17.0j,
23.0 + 43.0j, 15.0 + 11.0j, 28.0 + 19.0j, 35.0 + 32.0j,
33.0 + 49.0j, 42.0 + 48.0j, 47.0 + 32.0j, 34.0 + 25.0j,

>>> Query = "rank, nonzeros, S, SPlus"
>>> Res = A.eigen_jacobiSvd2(Query)

>>> print("rank         : ", Res["rank"])
rank         :  4
>>> print("nonzeros     : ", Res["nonzeros"])
nonzeropivots:  4

>>> Res["S"].show("Singular values")
Singular values:
 208 + 0j,
62.1 + 0j,
45.6 + 0j,
18.6 + 0j,

>>> Res["SPlus"].show("SPlus")
SPlus:
0.00480 + 0j,
 0.0161 + 0j,
 0.0219 + 0j,
 0.0536 + 0j,
```

6.8.2 Singular Value Decomposition, singular values and thin singular vectors

`ctx.`**`mat_jacobi_svd_thin`**(*matA*, *Query*, *matB*)

Returns the two-sided Jacobi SVD decomposition of a rectangular matrix.

Writing `matA.JacobiSvdThin(Query, matB)` has the same effect

See also: Wikipedia [1411], Wikipedia [1409].

Parameters:

Query
Required. A string specifying which items of the result section should be computed.

matB
Optional. A general n-by-m matrix of the same type as A. You need to specify B only if you want to solve the linear equation $AX = B$

Results:

absdet
A scalar of a return type matching A. The absolute value of the determinant of A.

rank
An integer. The rank of A.

X
A general matrix of the same type and dimension as B. The solution to $AX = B$.

pseudoInverse
A square matrix of the same type and dimension as A. The pseudo-inverse of A, A^{-1}.

SV
A vector of the same type`A`. The singular values A (see below).

thinU
A square matrix of the same type and dimension as A. The thin singular vectors U (see below).

thinV
A square matrix of the same type and dimension as A. The thin singular vectors V (see below).

6.8.2.1 Example for a real matrix: the singular values, pseudoinverse and thin singular vectors

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableRandomA6x6", ""); A.show("A")

A:
  48,   43,   31,   19,   14,   24,
  46,   10,   20,  4.6,   14,   10,
  27,   39,   13,   34,   29,   37,
 7.1,   42,   15,  2.8,   35,   23,
  23,   50,   42, 0.44,   42,   23,
  12,   50,  1.2,   46,   36,   47,

>>> B = ctx.read_from_sqlite(mp14.dbpath(), "DecTableB6x6", ""); B.show("B")
B:
911, 912, 913, 914, 915, 916,
921, 922, 923, 924, 925, 926,
931, 932, 933, 934, 935, 936,
941, 942, 943, 944, 945, 946,
951, 952, 953, 954, 955, 956,
961, 962, 963, 964, 965, 966,
```

(continues on next page)

(continued from previous page)

```
>>> Query = "rank, nonzeros, S, U, V, X, PseudoInverse, SPlus"
>>> Res = A.eigen_jacobiSvdThin(Query, B)

>>> print("rank         : ", Res["rank"])
rank         :  6
>>> print("nonzeros: ", Res["nonzeros"])
nonzeropivots:  6

>>> Res["S"].show("Singular values")
Singular values:
  169,
 58.6,
 44.1,
 15.2,
 7.75,
0.950,

>>> Res["U"].show("U")
U:
  0.435,  -0.390,   0.336,  -0.697,  -0.243, -0.0356,
  0.238,  -0.526,   0.374,   0.680,  -0.132,  -0.220,
  0.439,   0.204,   0.280,   0.153,   0.296,   0.759,
  0.337,  0.0890,  -0.509,   0.161,  -0.737,   0.224,
  0.460,  -0.310,  -0.610, -0.0138,   0.541,  -0.165,
  0.486,   0.653,   0.194,  0.0550,  0.0143,  -0.544,

>>> Res["V"].show("V")
V:
   0.370,   -0.615,    0.580,    0.226,   -0.303,  -0.0706,
   0.591,    0.117,   -0.297,   -0.551,   -0.442,   -0.223,
   0.290,   -0.527,   -0.261,   -0.271,    0.692,    0.135,
   0.283,    0.466,    0.563,   -0.127,    0.473,   -0.382,
   0.419,    0.114,   -0.418,    0.737,   0.0986,   -0.288,
   0.416,    0.317,    0.125,    0.112, -0.00594,    0.836,


>>> # Checking the properties of the decomposition
>>> (Res["U"] * Res["S"].D * Res["V"].H).show("U * S.D * V.H (should be equal to A)")
U * S.D * V.H (should be equal to A):
 48.0,  43.0,  31.0,  19.0,  14.0,  24.0,
 46.0,  10.0,  20.0,  4.60,  14.0,  10.0,
 27.0,  39.0,  13.0,  34.0,  29.0,  37.0,
 7.10,  42.0,  15.0,  2.80,  35.0,  23.0,
 23.0,  50.0,  42.0, 0.440,  42.0,  23.0,
 12.0,  50.0,  1.20,  46.0,  36.0,  47.0,

>>> CheckResult = (A - Res["U"] * Res["S"].D * Res["V"].H).norm()
>>> print("||A - U * S.D * V.H|| (should be zero): ", CheckResult)
||A - U * S.D * V.H|| (should be zero):  8.104128577459762885052053024055112 59E-33


>>> # Checking the properties of the pseudoinverse
>>> Res["SPlus"].show("SPlus")
SPlus:
0.00593,
 0.0171,
 0.0227,
 0.0657,
  0.129,
   1.05,

>>> Pinv = Res["V"] * Res["SPlus"].D * Res["U"].H; Pinv.show("Pinv = V * SPlus.D * U.H")
Pinv = V * SPlus.D * U.H:
 0.0113,  0.0426, -0.0633, 0.00768, -0.0128,  0.0375,
 0.0459,  0.0319,  -0.201, -0.0115,  0.0136,   0.127,
-0.0121, -0.0523,   0.129, -0.0340,  0.0322, -0.0835,
```

(continues on next page)

(continued from previous page)

```
0.00719,  0.0757,  -0.283,  -0.141,  0.0901,   0.228,
-0.0289,  0.0940,  -0.220, -0.0636,  0.0627,   0.169,
-0.0363,  -0.190,   0.672,   0.198,  -0.148,  -0.473,

>>> CheckResult = (Pinv - Res["PseudoInverse"]).norm()
>>> print("||Pinv - PseudoInverse|| (should be zero): ", CheckResult)
||Pinv - PseudoInverse|| (should be zero):  2.28256434739527113292893309427326250E-36

>>> CheckResult = (A - A * Pinv * A).norm()
>>> print("||A - A * Pinv * A|| (should be zero): ", CheckResult)
||A - A * Pinv * A|| (should be zero):  8.984340599064574644416585197367274 90E-33



>>> # Checking the properties of the solution x
>>> XPlus = Pinv * B; XPlus.show("XPlus")
XPlus:
 21.6,  21.7,  21.7,  21.7,  21.7,  21.8,
 8.21,  8.22,  8.22,  8.23,  8.23,  8.24,
-20.5, -20.6, -20.6, -20.6, -20.6, -20.6,
-15.3, -15.3, -15.4, -15.4, -15.4, -15.4,
 16.9,  16.9,  17.0,  17.0,  17.0,  17.0,
 8.73,  8.76,  8.78,  8.80,  8.82,  8.85,

>>> CheckResult = (XPlus - Res["X"]).norm()
>>> print("||XPlus - X]|| (should be zero): ", CheckResult)
||XPlus - X]|| (should be zero):  5.9597147582749293858003475468366907 1E-33

>>> CheckResult = (B - A * Res["X"]).norm()
>>> print("||B - A * X|| (should be zero): ", CheckResult)
||B - A * X|| (should be zero):  4.859012245302536794173943421310615 88E-32



>>> # Checking the relationship to the eigenvalues of A * A.H
>>> C = A * A.H if (A.rows > A.cols) else A.H * A
>>> D = C.eigen_SelfAdjointEigenSystem2("eval")["eval"]; D.show("D: Eigenvalues of A * A.H")
D: Eigenvalues of A * A.H:
  0.902,
   60.0,
    232,
1.94E+3,
3.43E+3,
2.85E+4,

>>> E = (Res["S"].cwiseProduct(Res["S"])).reverse_full()
>>> E.show("E: Squared singular values, in ascending order")
E: Squared singular values, in ascending order:
  0.902,
   60.0,
    232,
1.94E+3,
3.43E+3,
2.85E+4,

>>> (D - E).show("D-E (should be a zero vector)")
D-E (should be a zero vector):
-1.48E-32,
-3.34E-32,
 -5.4E-32,
 -1.3E-31,
 -4.1E-31,
    4E-31,
```

6.8.2.2 Example for a complex matrix: the singular values, pseudoinverse and thin singular vectors

```
>>> from xlcalcnet import *
>>> ctx = mp14.dcf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecCplxTableB6x6", "")
>>> A = A.top_left_corner(4,4); A.show("A")
A:
45.0 + 7.50j, 2.90 + 36.0j, 11.0 + 13.0j, 37.0 + 37.0j,
13.0 + 29.0j, 38.0 + 41.0j, 22.0 + 44.0j, 28.0 + 20.0j,
32.0 + 9.00j, 42.0 + 49.0j, 47.0 + 11.0j, 32.0 + 49.0j,
34.0 + 42.0j, 6.00 + 16.0j, 20.0 + 38.0j, 22.0 + 17.0j,

>>> B = ctx.read_from_sqlite(mp14.dbpath(), "DecCplxTableA6x6", "")
>>> B = B.top_left_corner(4,4); B.show("B")
B:
11.0 + 31.0j, 12.0 + 32.0j, 13.0 + 33.0j, 14.0 + 34.0j,
21.0 + 41.0j, 22.0 + 42.0j, 23.0 + 43.0j, 24.0 + 44.0j,
31.0 + 51.0j, 32.0 + 52.0j, 33.0 + 53.0j, 34.0 + 54.0j,
41.0 + 61.0j, 42.0 + 62.0j, 43.0 + 63.0j, 44.0 + 64.0j,

>>> Query = "rank, nonzeros, S, U, V, X, PseudoInverse, SPlus"
>>> Res = A.eigen_jacobiSvdThin(Query, B)

>>> print("rank         : ", Res["rank"])
rank         :  4
>>> print("nonzeros: ", Res["nonzeros"])
nonzeropivots:  4

>>> Res["S"].show("Singular values")
Singular values:
 163 + 0j,
54.2 + 0j,
39.9 + 0j,
3.63 + 0j,

>>> Res["U"].show("U")
U:
 -0.430 - 0.102j,   0.409 - 0.250j,  0.585 - 0.0708j,  -0.324 + 0.348j,
 -0.476 - 0.153j, -0.582 + 0.0348j,  -0.170 - 0.215j,  -0.546 - 0.190j,
-0.617 - 0.0410j,  0.0954 - 0.293j,  -0.386 + 0.495j,  0.359 - 0.0131j,
 -0.375 - 0.176j, -0.0724 + 0.574j,   0.349 - 0.247j,   0.534 - 0.159j,

>>> Res["V"].show("V")
V:
  -0.437 + 0.150j,    0.592 + 0.283j,    0.274 - 0.230j, -0.478 + 0.00322j,
  -0.383 + 0.383j,  -0.556 - 0.0490j,   -0.250 + 0.254j,  -0.513 + 0.0673j,
  -0.411 + 0.231j,    0.214 + 0.327j,  -0.572 + 0.0914j,   0.537 - 0.0308j,
  -0.425 + 0.300j,   -0.237 - 0.221j,   0.634 - 0.0880j,   0.463 - 0.0218j,


>>> # Checking the properties of the decomposition
>>> (Res["U"] * Res["S"].D * Res["V"].H).show("U * S.D * V.H (should be equal to A)")
U * S.D * V.H (should be equal to A):
45.0 + 7.50j, 2.90 + 36.0j, 11.0 + 13.0j, 37.0 + 37.0j,
13.0 + 29.0j, 38.0 + 41.0j, 22.0 + 44.0j, 28.0 + 20.0j,
32.0 + 9.00j, 42.0 + 49.0j, 47.0 + 11.0j, 32.0 + 49.0j,
34.0 + 42.0j, 6.00 + 16.0j, 20.0 + 38.0j, 22.0 + 17.0j,

>>> CheckResult = (A - Res["U"] * Res["S"].D * Res["V"].H).norm()
>>> print("||A - U * S.D * V.H|| (should be zero): ", CheckResult)
||A - U * S.D * V.H|| (should be zero):  7.23797623649041832083182110841296889E-33 + 0j


>>> # Checking the properties of the pseudoinverse
>>> Res["SPlus"].show("SPlus")
SPlus:
0.00615 + 0j,
```

(continues on next page)

(continued from previous page)

```
 0.0185 + 0j,
 0.0250 + 0j,
  0.275 + 0j,

>>> Pinv = Res["V"] * Res["SPlus"].D * Res["U"].H; Pinv.show("Pinv = V * SPlus.D * U.H")
Pinv = V * SPlus.D * U.H:
   0.0516 + 0.0468j,    0.0667 - 0.0273j, -0.0516 + 0.000462j,   -0.0635 - 0.0282j,
   0.0449 + 0.0423j,    0.0801 - 0.0400j, -0.0447 + 0.000795j,  -0.0814 - 0.00721j,
  -0.0583 - 0.0458j,   -0.0783 + 0.0245j,   0.0599 + 0.00584j,    0.0786 + 0.0125j,
  -0.0338 - 0.0465j,   -0.0674 + 0.0325j,    0.0409 - 0.0104j,    0.0738 + 0.0219j,

>>> CheckResult = (Pinv - Res["PseudoInverse"]).norm()
>>> print("||Pinv - PseudoInverse|| (should be zero): ", CheckResult)
||Pinv - PseudoInverse|| (should be zero):  6.32060123722419305732811075240482494E-37 + 0j

>>> CheckResult = (A - A * Pinv * A).norm()
>>> print("||A - A * Pinv * A|| (should be zero): ", CheckResult)
||A - A * Pinv * A|| (should be zero):  4.78955112719344504545703109417795418E-33 + 0j



>>> # Checking the properties of the solution x
>>> XPlus = Pinv * B; XPlus.show("XPlus")
XPlus:
-0.869 - 3.37j, -0.858 - 3.37j, -0.846 - 3.38j, -0.835 - 3.38j,
 -1.82 - 3.22j,  -1.82 - 3.22j,  -1.82 - 3.23j,  -1.81 - 3.23j,
  2.15 + 3.53j,   2.15 + 3.53j,   2.16 + 3.53j,   2.16 + 3.53j,
  1.81 + 3.52j,   1.82 + 3.53j,   1.84 + 3.54j,   1.86 + 3.55j,

>>> CheckResult = (XPlus - Res["X"]).norm()
>>> print("||XPlus - X]|| (should be zero): ", CheckResult)
||XPlus - X]|| (should be zero):  8.35763124336076459797867686951053026E-35 + 0j

>>> CheckResult = (B - A * Res["X"]).norm()
>>> print("||B - A * X|| (should be zero): ", CheckResult)
||B - A * X|| (should be zero):  8.25590697622011727085329191499069154E-33 + 0j



>>> # Checking the relationship to the eigenvalues of A * A.H
>>> C = A * A.H if (A.rows > A.cols) else A.H * A
>>> D = C.eigen_SelfAdjointEigenSystem2("eval")["eval"]; D.show("D: Eigenvalues of A * A.H")
D: Eigenvalues of A * A.H:
   13.2 + 0j,
1.60E+3 + 0j,
2.93E+3 + 0j,
2.65E+4 + 0j,

>>> E = (Res["S"].cwiseProduct(Res["S"])).reverse_full();
>>> E.show("E: Squared singular values, in ascending order")
E: Squared singular values, in ascending order:
   13.2 + 0j,
1.60E+3 + 0j,
2.93E+3 + 0j,
2.65E+4 + 0j,

>>> (D - E).show("D-E (should be a zero vector)")
D-E (should be a zero vector):
-5.10E-33 + 0j,
-1.40E-31 + 0j,
 2.40E-31 + 0j,
 7.00E-31 + 0j,
```

6.8.3 Singular Value Decomposition, singular values and full singular vectors

`ctx.mat_jacobi_svd_full`(*matA*, *Query*, *matB*)

Returns the two-sided Jacobi SVD decomposition of a rectangular matrix.

Writing `matA.JacobiSvdFull(Query, matB)` has the same effect

See also Eigen [229], Wikipedia [1411], Wikipedia [1409], Wikipedia [1423].

Parameters:

Query
Required. A string specifying which items of the result section should be computed.

matB
Optional. A general n-by-m matrix of the same type as A. You need to specify B only if you want to solve the linear equation $AX = B$

Results:

absdet
A scalar of a return type matching A. The absolute value of the determinant of A.

rank
An integer. The rank of A.

X
A general matrix of the same type and dimension as B. The solution to $AX = B$.

pseudoInverse
A square matrix of the same type and dimension as A. The pseudo-inverse of A, A^{-1}.

SV
A vector of the same type`A`. The singular values A (see below).

fullU
A square matrix of the same type and dimension as A. The full singular vectors U (see below).

fullV
A square matrix of the same type and dimension as A. The full singular vectors V (see below).

SVD decomposition consists in decomposing any n-by-p matrix A as a product

$A = USV*$

where U is a n-by-n unitary, V is a p-by-p unitary, and S is a n-by-p real positive matrix which is zero outside of its main diagonal; the diagonal entries of S are known as the singular values of A and the columns of U and V are known as the left and right singular vectors of A respectively. Singular values are always sorted in decreasing order.

This JacobiSVD decomposition computes only singular values by default. If you want U or V , you need to ask for them explicitly.

You can ask for only thin U or V to be computed, meaning the following. In case of a rectangular n-by-p matrix, letting m be the smaller value among n and p, there are only m singular vectors; the remaining columns of U and V do not correspond to actual singular vectors. Asking for thin U or V means asking for only their m first columns to be formed. So U is then a n-by-m matrix, and V is then a p-by-m matrix. Notice that thin U and V are all you need for (least squares) solving.

This JacobiSVD class is a two-sided Jacobi R-SVD decomposition, ensuring optimal reliability and accuracy. The downside is that it's slower than bidiagonalizing SVD algorithms for large square matrices; however its complexity is still where n is the smaller dimension and p is the greater dimension, meaning that it is still of the same order of complexity as the faster bidiagonalizing R-SVD algorithms. In particular, like any R-SVD, it takes advantage of non-squareness in that its complexity is only linear in the greater dimension.

If the input matrix has inf or nan coefficients, the result of the computation is undefined, but the computation is guaranteed to terminate in finite (and reasonable) time.

The possible values for QRPreconditioner are:

- ColPivHouseholderQRPreconditioner is the default. In practice it's very safe. It uses column-pivoting QR.
- FullPivHouseholderQRPreconditioner, is the safest and slowest. It uses full-pivoting QR. Contrary to other QRs, it doesn't allow computing thin unitaries.
- HouseholderQRPreconditioner is the fastest, and less safe and accurate than the pivoting variants. It uses non-pivoting QR. This is very similar in safety and accuracy to the bidiagonalization process used by bidiagonalizing SVD algorithms (since bidiagonalization is inherently non-pivoting). However the resulting SVD is still more reliable than bidiagonalizing SVDs because the Jacobi-based iterarive process is more reliable than the optimized bidiagonal SVD iterations.
- NoQRPreconditioner allows not to use a QR preconditioner at all. This is useful if you know that you will only be computing JacobiSVD decompositions of square matrices. Non-square matrices require a QR preconditioner. Using this option will result in faster compilation and smaller executable code. It won't significantly speed up computation, since JacobiSVD is always checking if QR preconditioning is needed before applying it anyway.

const internal::solve retval¡JacobiSVD, Rhs¿ solve (const MatrixBase¡ Rhs ¿ & b) const Returns a (least squares) solution of using the current SVD decomposition of A. Parameters: b the right-hand-side of the equation to solve.

Note: Solving requires both U and V to be computed. Thin U and V are enough, there is no need for full U or V. SVD solving is implicitly least-squares. Thus, this method serves both purposes of exact solving and least-squaressolving. In other words, the returned solution is guaranteed to minimize the Euclidean norm $||Ax - b||$.

Example for a real matrix: the singular values, pseudoinverse and full singular vectors

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableRandomA6x6", ""); A.show("A")

A:
  48,   43,   31,   19,   14,   24,
  46,   10,   20,  4.6,   14,   10,
  27,   39,   13,   34,   29,   37,
 7.1,   42,   15,  2.8,   35,   23,
  23,   50,   42, 0.44,   42,   23,
  12,   50,  1.2,   46,   36,   47,

>>> B = ctx.read_from_sqlite(mp14.dbpath(), "DecTableB6x6", ""); B.show("B")
B:
911, 912, 913, 914, 915, 916,
921, 922, 923, 924, 925, 926,
931, 932, 933, 934, 935, 936,
941, 942, 943, 944, 945, 946,
951, 952, 953, 954, 955, 956,
961, 962, 963, 964, 965, 966,

>>> Query = "rank, nonzeros, S, U, V, X, PseudoInverse, SPlus"
>>> Res = A.eigen_jacobiSvdFull(Query, B)

>>> print("rank         : ", Res["rank"])
rank         :  6
>>> print("nonzeros: ", Res["nonzeros"])
nonzeropivots:  6

>>> Res["S"].show("Singular values")
Singular values:
  169,
 58.6,
 44.1,
 15.2,
 7.75,
0.950,

>>> Res["U"].show("U")
U:
  0.435,  -0.390,   0.336,  -0.697,  -0.243, -0.0356,
```

(continues on next page)

(continued from previous page)

```
  0.238,  -0.526,   0.374,   0.680,  -0.132,  -0.220,
  0.439,   0.204,   0.280,   0.153,   0.296,   0.759,
  0.337,  0.0890,  -0.509,   0.161,  -0.737,   0.224,
  0.460,  -0.310,  -0.610, -0.0138,   0.541,  -0.165,
  0.486,   0.653,   0.194,  0.0550,  0.0143,  -0.544,

>>> Res["V"].show("V")
V:
   0.370,   -0.615,    0.580,    0.226,   -0.303,  -0.0706,
   0.591,    0.117,   -0.297,   -0.551,   -0.442,   -0.223,
   0.290,   -0.527,   -0.261,   -0.271,    0.692,    0.135,
   0.283,    0.466,    0.563,   -0.127,    0.473,   -0.382,
   0.419,    0.114,   -0.418,    0.737,   0.0986,   -0.288,
   0.416,    0.317,    0.125,    0.112, -0.00594,    0.836,


>>> # Checking the properties of the decomposition
>>> (Res["U"] * Res["S"].D * Res["V"].H).show("U * S.D * V.H (should be equal to A)")
U * S.D * V.H (should be equal to A):
 48.0,  43.0,  31.0,  19.0,  14.0,  24.0,
 46.0,  10.0,  20.0,  4.60,  14.0,  10.0,
 27.0,  39.0,  13.0,  34.0,  29.0,  37.0,
 7.10,  42.0,  15.0,  2.80,  35.0,  23.0,
 23.0,  50.0,  42.0, 0.440,  42.0,  23.0,
 12.0,  50.0,  1.20,  46.0,  36.0,  47.0,

>>> CheckResult = (A - Res["U"] * Res["S"].D * Res["V"].H).norm()
>>> print("||A - U * S.D * V.H|| (should be zero): ", CheckResult)
||A - U * S.D * V.H|| (should be zero):  8.104128577459762885052053024055112590E-33


>>> # Checking the properties of the pseudoinverse
>>> Res["SPlus"].show("SPlus")
SPlus:
0.00593,
 0.0171,
 0.0227,
 0.0657,
  0.129,
   1.05,

>>> Pinv = Res["V"] * Res["SPlus"].D * Res["U"].H; Pinv.show("Pinv = V * SPlus.D * U.H")
Pinv = V * SPlus.D * U.H:
 0.0113,  0.0426, -0.0633, 0.00768, -0.0128,  0.0375,
 0.0459,  0.0319,  -0.201, -0.0115,  0.0136,   0.127,
-0.0121, -0.0523,   0.129, -0.0340,  0.0322, -0.0835,
0.00719,  0.0757,  -0.283,  -0.141,  0.0901,   0.228,
-0.0289,  0.0940,  -0.220, -0.0636,  0.0627,   0.169,
-0.0363,  -0.190,   0.672,   0.198,  -0.148,  -0.473,

>>> CheckResult = (Pinv - Res["PseudoInverse"]).norm()
>>> print("||Pinv - PseudoInverse|| (should be zero): ", CheckResult)
||Pinv - PseudoInverse|| (should be zero):  2.282564347395271132928933094273262506E-36

>>> CheckResult = (A - A * Pinv * A).norm()
>>> print("||A - A * Pinv * A|| (should be zero): ", CheckResult)
||A - A * Pinv * A|| (should be zero):  8.984340599064574644416585197367274906E-33



>>> # Checking the properties of the solution x
>>> XPlus = Pinv * B; XPlus.show("XPlus")
XPlus:
 21.6,  21.7,  21.7,  21.7,  21.7,  21.8,
 8.21,  8.22,  8.22,  8.23,  8.23,  8.24,
-20.5, -20.6, -20.6, -20.6, -20.6, -20.6,
```

(continues on next page)

(continued from previous page)

```
-15.3, -15.3, -15.4, -15.4, -15.4, -15.4,
 16.9,  16.9,  17.0,  17.0,  17.0,  17.0,
 8.73,  8.76,  8.78,  8.80,  8.82,  8.85,

>>> CheckResult = (XPlus - Res["X"]).norm()
>>> print("||XPlus - X]|| (should be zero): ", CheckResult)
||XPlus - X]|| (should be zero):  5.9597147582749293858003475468366907 1E-33

>>> CheckResult = (B - A * Res["X"]).norm()
>>> print("||B - A * X|| (should be zero): ", CheckResult)
||B - A * X|| (should be zero):  4.859012245302536794173943421310615 88E-32



>>> # Checking the relationship to the eigenvalues of A * A.H
>>> C = A * A.H if (A.rows > A.cols) else A.H * A
>>> D = C.eigen_SelfAdjointEigenSystem2("eval")["eval"]; D.show("D: Eigenvalues of A * A.H")
D: Eigenvalues of A * A.H:
  0.902,
   60.0,
    232,
1.94E+3,
3.43E+3,
2.85E+4,

>>> E = (Res["S"].cwiseProduct(Res["S"])).reverse_full()
>>> E.show("E: Squared singular values, in ascending order")
E: Squared singular values, in ascending order:
  0.902,
   60.0,
    232,
1.94E+3,
3.43E+3,
2.85E+4,

>>> (D - E).show("D-E (should be a zero vector)")
D-E (should be a zero vector):
-1.48E-32,
-3.34E-32,
 -5.4E-32,
 -1.3E-31,
 -4.1E-31,
    4E-31,
```

6.8.3.1 Example for a complex matrix: the singular values, pseudoinverse and full singular vectors

```
>>> from xlcalcnet import *
>>> ctx = mp14.dcf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecCplxTableB6x6", "")
>>> A = A.top_left_corner(4,4); A.show("A")
A:
45.0 + 7.50j, 2.90 + 36.0j, 11.0 + 13.0j, 37.0 + 37.0j,
13.0 + 29.0j, 38.0 + 41.0j, 22.0 + 44.0j, 28.0 + 20.0j,
32.0 + 9.00j, 42.0 + 49.0j, 47.0 + 11.0j, 32.0 + 49.0j,
34.0 + 42.0j, 6.00 + 16.0j, 20.0 + 38.0j, 22.0 + 17.0j,

>>> B = ctx.read_from_sqlite(mp14.dbpath(), "DecCplxTableA6x6", "")
>>> B = B.top_left_corner(4,4); B.show("B")
B:
11.0 + 31.0j, 12.0 + 32.0j, 13.0 + 33.0j, 14.0 + 34.0j,
21.0 + 41.0j, 22.0 + 42.0j, 23.0 + 43.0j, 24.0 + 44.0j,
31.0 + 51.0j, 32.0 + 52.0j, 33.0 + 53.0j, 34.0 + 54.0j,
41.0 + 61.0j, 42.0 + 62.0j, 43.0 + 63.0j, 44.0 + 64.0j,
```

(continues on next page)

(continued from previous page)

```
>>> Query = "rank, nonzeros, S, U, V, X, PseudoInverse, SPlus"
>>> Res = A.eigen_jacobiSvdThin(Query, B)

>>> print("rank         : ", Res["rank"])
rank         :  4
>>> print("nonzeros: ", Res["nonzeros"])
nonzeropivots:  4

>>> Res["S"].show("Singular values")
Singular values:
 163 + 0j,
54.2 + 0j,
39.9 + 0j,
3.63 + 0j,

>>> Res["U"].show("U")
U:
 -0.430 - 0.102j,   0.409 - 0.250j,  0.585 - 0.0708j,  -0.324 + 0.348j,
 -0.476 - 0.153j, -0.582 + 0.0348j,  -0.170 - 0.215j,  -0.546 - 0.190j,
-0.617 - 0.0410j,  0.0954 - 0.293j,  -0.386 + 0.495j,  0.359 - 0.0131j,
 -0.375 - 0.176j, -0.0724 + 0.574j,   0.349 - 0.247j,   0.534 - 0.159j,

>>> Res["V"].show("V")
V:
  -0.437 + 0.150j,    0.592 + 0.283j,    0.274 - 0.230j, -0.478 + 0.00322j,
  -0.383 + 0.383j,  -0.556 - 0.0490j,   -0.250 + 0.254j,  -0.513 + 0.0673j,
  -0.411 + 0.231j,    0.214 + 0.327j,  -0.572 + 0.0914j,   0.537 - 0.0308j,
  -0.425 + 0.300j,   -0.237 - 0.221j,   0.634 - 0.0880j,   0.463 - 0.0218j,


>>> # Checking the properties of the decomposition
>>> (Res["U"] * Res["S"].D * Res["V"].H).show("U * S.D * V.H (should be equal to A)")
U * S.D * V.H (should be equal to A):
45.0 + 7.50j, 2.90 + 36.0j, 11.0 + 13.0j, 37.0 + 37.0j,
13.0 + 29.0j, 38.0 + 41.0j, 22.0 + 44.0j, 28.0 + 20.0j,
32.0 + 9.00j, 42.0 + 49.0j, 47.0 + 11.0j, 32.0 + 49.0j,
34.0 + 42.0j, 6.00 + 16.0j, 20.0 + 38.0j, 22.0 + 17.0j,

>>> CheckResult = (A - Res["U"] * Res["S"].D * Res["V"].H).norm()
>>> print("||A - U * S.D * V.H|| (should be zero): ", CheckResult)
||A - U * S.D * V.H|| (should be zero):  7.23797623649041832083182110841296889E-33 + 0j


>>> # Checking the properties of the pseudoinverse
>>> Res["SPlus"].show("SPlus")
SPlus:
0.00615 + 0j,
 0.0185 + 0j,
 0.0250 + 0j,
  0.275 + 0j,

>>> Pinv = Res["V"] * Res["SPlus"].D * Res["U"].H; Pinv.show("Pinv = V * SPlus.D * U.H")
Pinv = V * SPlus.D * U.H:
   0.0516 + 0.0468j,    0.0667 - 0.0273j, -0.0516 + 0.000462j,   -0.0635 - 0.0282j,
   0.0449 + 0.0423j,    0.0801 - 0.0400j, -0.0447 + 0.000795j,  -0.0814 - 0.00721j,
  -0.0583 - 0.0458j,   -0.0783 + 0.0245j,   0.0599 + 0.00584j,    0.0786 + 0.0125j,
  -0.0338 - 0.0465j,   -0.0674 + 0.0325j,    0.0409 - 0.0104j,    0.0738 + 0.0219j,

>>> CheckResult = (Pinv - Res["PseudoInverse"]).norm()
>>> print("||Pinv - PseudoInverse|| (should be zero): ", CheckResult)
||Pinv - PseudoInverse|| (should be zero):  6.32060123722419305732811075240482494E-37 + 0j

>>> CheckResult = (A - A * Pinv * A).norm()
>>> print("||A - A * Pinv * A|| (should be zero): ", CheckResult)
||A - A * Pinv * A|| (should be zero):  4.78955112719344504545703109417795418E-33 + 0j
```

(continues on next page)

(continued from previous page)

```
>>> # Checking the properties of the solution x
>>> XPlus = Pinv * B; XPlus.show("XPlus")
XPlus:
-0.869 - 3.37j, -0.858 - 3.37j, -0.846 - 3.38j, -0.835 - 3.38j,
 -1.82 - 3.22j,  -1.82 - 3.22j,  -1.82 - 3.23j,  -1.81 - 3.23j,
  2.15 + 3.53j,   2.15 + 3.53j,   2.16 + 3.53j,   2.16 + 3.53j,
  1.81 + 3.52j,   1.82 + 3.53j,   1.84 + 3.54j,   1.86 + 3.55j,

>>> CheckResult = (XPlus - Res["X"]).norm()
>>> print("||XPlus - X]|| (should be zero): ", CheckResult)
||XPlus - X]|| (should be zero):  8.3576312433607645979786768695105302 6E-35 + 0j

>>> CheckResult = (B - A * Res["X"]).norm()
>>> print("||B - A * X|| (should be zero): ", CheckResult)
||B - A * X|| (should be zero):  8.2559069762201172708532919149906915 4E-33 + 0j



>>> # Checking the relationship to the eigenvalues of A * A.H
>>> C = A * A.H if (A.rows > A.cols) else A.H * A
>>> D = C.eigen_SelfAdjointEigenSystem2("eval")["eval"]; D.show("D: Eigenvalues of A * A.H")
D: Eigenvalues of A * A.H:
   13.2 + 0j,
1.60E+3 + 0j,
2.93E+3 + 0j,
2.65E+4 + 0j,

>>> E = (Res["S"].cwiseProduct(Res["S"])).reverse_full();
>>> E.show("E: Squared singular values, in ascending order")
E: Squared singular values, in ascending order:
   13.2 + 0j,
1.60E+3 + 0j,
2.93E+3 + 0j,
2.65E+4 + 0j,

>>> (D - E).show("D-E (should be a zero vector)")
D-E (should be a zero vector):
-5.10E-33 + 0j,
-1.40E-31 + 0j,
 2.40E-31 + 0j,
 7.00E-31 + 0j,
```

6.8.4 Symmetric/Hermitian Eigensystem, only eigen values

`ctx.mat_self_adjoint_eigen_values`(*matA*, *Query*)

Returns the eigendecomposition of the symmetric/hermitian matrix *matA* $= A$.

Writing `matA.SelfAdjointEigenValues(Query)` has the same effect

See also Eigen [238], Wikipedia [1396], Wikipedia [1398], Wikipedia [1423].

Parameters:

Query
Required. A string specifying which items of the result section should be computed.

Results:

info
Reports whether previous computation was successful.

eval
Returns the eigenvalues of given matrix.

evec
Returns the eigenvectors of given matrix.

sqrt
Returns the positive-definite square root of the matrix

inversesqrt
Returns the inverse square root of the matrix

A matrix A is selfadjoint if it equals its adjoint. For real matrices, this means that the matrix is symmetric: it equals its transpose. This class computes the eigenvalues and eigenvectors of a selfadjoint matrix. These are the scalars λ and vectors v such that $Av = \lambda v$. The eigenvalues of a selfadjoint matrix are always real. If D is a diagonal matrix with the eigenvalues on the diagonal, and V is a matrix with the eigenvectors as its columns, then $A = VDV^{-1}$ (for selfadjoint matrices, the matrix V is always invertible). This is called the eigendecomposition. The algorithm exploits the fact that the matrix is selfadjoint, making it faster and more accurate than the general purpose eigenvalue algorithms implemented in EigenSolver and ComplexEigenSolver. Only the lower triangular part of the input matrix is referenced.

Call the function compute() to compute the eigenvalues and eigenvectors of a given matrix. Alternatively, you can use the SelfAdjointEigenSolver(const MatrixType, int) constructor which computes the eigenvalues and eigenvectors at construction time. Once the eigenvalue and eigenvectors are computed, they can be retrieved with the eigenvalues() and eigenvectors() functions. The documentation for SelfAdjointEigenSolver(const MatrixType, int) contains an example of the typical use of this class.

To solve the generalized eigenvalue problem $Av = \lambda Bv$ and the likes, see the class GeneralizedSelfAdjointEigenSolver. This implementation uses a symmetric QR algorithm. The matrix is first reduced to tridiagonal form using the Tridiagonalization class. The tridiagonal matrix is then brought to diagonal form with implicit symmetric QR steps with Wilkinson shift. Details can be found in Section 8.3 of Golub & Van Loan (1996). The cost of the computation is about 9n3 if the eigenvectors are required and 4n3/3 if they are not required.

6.8.4.1 Example for a real symmetric matrix: only eigenvalues

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableRandomSAA6x6", ""); A.show("A")
A:
44.9, 25.5, 50.0, 47.9, 26.4, 62.0,
25.5, 24.3, 49.1, 95.0, 29.0, 46.6,
50.0, 49.1, 55.5, 84.0, 44.4, 26.7,
47.9, 95.0, 84.0, 64.5, 39.5, 87.5,
26.4, 29.0, 44.4, 39.5, 39.8, 12.3,
62.0, 46.6, 26.7, 87.5, 12.3, 85.0,
```

(continues on next page)

(continued from previous page)

```
>>> Query = "Eval"
>>> Res = A.eigen_SelfAdjointEigenValues2(Query)

>>> L = Res["Eval"]; ct = ["L[i]"]; rt = ["i"] + [x for x in range(L.rows)]
>>> L.show("Vector L of eigenvalues", coltitles = ct, rowtitles = rt)
Vector L of eigenvalues:
i   L[i]
0: -61.7,
1: -27.7,
2:  4.34,
3:  25.8,
4:  62.5,
5:   311,

>>> X = +A; #X.show("X")
>>> AD = X.diagonal(); #AD.show("AD")
>>> Det = L * 0 # creates a zero vector of the same size and type as L

>>> for i in range(A.rows):
>>>     X.set_diagonal(0, AD - L[i])
>>>     Det[i] = X.eigen_det()

>>> Result = L.concat_horizontal(Det)
>>> mt = "Checking the Eigenvalues (Det(A - I * L[i]) should be zero)"
>>> ct = ["L[i]", "Det(A - I * L[i])"]
>>> Result.show(mt, coltitles = ct, rowtitles = rt)
Checking the Eigenvalues (Det(A - I * L[i]) should be zero):
i   L[i]  Det(A - I * L[i])
0: -61.7,          3.71E-23,
1: -27.7,          7.41E-25,
2:  4.34,         -1.22E-25,
3:  25.8,          2.76E-25,
4:  62.5,         -2.13E-23,
5:   311,          1.24E-20,
```

6.8.4.2 Example for a hermitian matrix: only eigenvalues

```
>>> from xlcalcnet import *
>>> ctx = mp14.dcf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecCplxTableRandomSAA6x6", "")
>>> A = A.top_left_corner(4,4); A.show("A")
A:
   80.0 + 0j, 50.0 - 23.0j, 85.0 + 5.00j, 36.0 - 4.30j,
50.0 + 23.0j,    30.0 + 0j, 43.0 + 9.50j, 27.0 + 11.0j,
85.0 - 5.00j, 43.0 - 9.50j,    85.0 + 0j, 55.0 - 7.00j,
36.0 + 4.30j, 27.0 - 11.0j, 55.0 + 7.00j,    23.0 + 0j,

Query = "Eval"
Res = A.eigen_SelfAdjointEigenValues2(Query)

>>> L = Res["Eval"]; ct = ["L[i]"]; rt = ["i"] + [x for x in range(L.rows)]
>>> L.show("Vector L of eigenvalues", coltitles = ct, rowtitles = rt)
Vector L of eigenvalues:
i        L[i]
0: -21.6 + 0j,
1:  3.50 + 0j,
2:  14.1 + 0j,
3:   222 + 0j,

>>> X = +A; #X.show("X")
>>> AD = X.diagonal(); #AD.show("AD")
>>> Det = L * 0 # creates a zero vector of the same size and type as L
```

(continues on next page)

(continued from previous page)

```
>>> for i in range(A.rows):
>>>     X.set_diagonal(0, AD - L[i])
>>>     Det[i] = X.eigen_det()

>>> Result = L.concat_horizontal(Det)
>>> mt = "Checking the Eigenvalues (Det(A - I * L[i]) should be zero)"
>>> ct = ["L[i]", "Det(A - I * L[i])"]
>>> Result.show(mt, coltitles = ct, rowtitles = rt)
Checking the Eigenvalues (Det(A - I * L[i]) should be zero):
i        L[i]      Det(A - I * L[i])
0: -21.6 + 0j,  5.65E-29 + 4.39E-30j,
1:  3.50 + 0j,  1.82E-29 - 2.71E-30j,
2:  14.1 + 0j, -1.40E-29 - 2.14E-30j,
3:   222 + 0j,  2.52E-26 - 5.79E-28j,
```

6.8.5 Symmetric/Hermitian Eigensystem, eigenvalues and eigenvectors

`ctx.mat_self_adjoint_eigen_system`(*matA*, *Query*)

Returns the eigendecomposition of the symmetric/hermitian matrix *matA* $= A$.

Writing `matA.SelfAdjointEigenSystem(Query)` has the same effect

See also Eigen [238], Wikipedia [1396], Wikipedia [1398], Wikipedia [1423].

Parameters:

Query
Required. A string specifying which items of the result section should be computed.

Results:

info
Reports whether previous computation was successful.

eval
Returns the eigenvalues of given matrix.

evec
Returns the eigenvectors of given matrix.

sqrt
Returns the positive-definite square root of the matrix

inversesqrt
Returns the inverse square root of the matrix

6.8.5.1 Example for a real symmetric matrix: eigenvalues and eigenvectors

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableRandomSAA6x6", ""); A.show("A")
A:
44.9, 25.5, 50.0, 47.9, 26.4, 62.0,
25.5, 24.3, 49.1, 95.0, 29.0, 46.6,
50.0, 49.1, 55.5, 84.0, 44.4, 26.7,
47.9, 95.0, 84.0, 64.5, 39.5, 87.5,
26.4, 29.0, 44.4, 39.5, 39.8, 12.3,
62.0, 46.6, 26.7, 87.5, 12.3, 85.0,

Query = "Eval, Evec"
Res = A.eigen_SelfAdjointEigenSystem2(Query)

>>> L = Res["Eval"]; ct = ["L[i]"]; rt = ["i"] + [x for x in range(L.rows)]
>>> L.show("Vector L of eigenvalues", coltitles = ct, rowtitles = rt)
Vector L of eigenvalues:
i   L[i]
0: -61.7,
1: -27.7,
2:  4.34,
3:  25.8,
4:  62.5,
5:   311,

>>> V =  Res["Evec"]; mt = "Matrix V of eigenvectors (V0, ... , V" + str(V.cols-1) + ")"
>>> V.show(mt, coltitles = ["V#"] * (V.cols))
Matrix V of eigenvectors (V0, ... , V5):
      V0       V1       V2      V3      V4     V5
  0.0719,  -0.497,  -0.271,  0.730, -0.157, 0.343,
  -0.550,  -0.562,  0.0403, -0.473, 0.0957, 0.382,
  -0.277,   0.514,  -0.515, 0.0931,  0.464, 0.412,
```

(continues on next page)

(continued from previous page)

```
   0.744, -0.0396, -0.0409, -0.370, 0.0252, 0.553,
0.000270,  0.0462,   0.760,  0.310,  0.515, 0.243,
  -0.249,   0.410,   0.284, 0.0486, -0.697, 0.449,

>>> CheckResult = (A - V * L.D * V.eigen_inverse()).norm()
>>> print("||A - V * diag(L) * V^-1|| (should be zero): ", (CheckResult).s())
    ||A - V * diag(L) * V^-1|| (should be zero):  7.70E-33

>>> X = +A; #X.show("X")
>>> AD = X.diagonal(); #AD.show("AD")
>>> Det = L * 0 # creates a zero vector of the same size and type as L

>>> for i in range(A.rows):
>>>     X.set_diagonal(0, AD - L[i])
>>>     Det[i] = X.eigen_det()

>>> Result = L.concat_horizontal(Det)
>>> mt = "Checking the Eigenvalues (Det(A - I * L[i]) should be zero)"
>>> ct = ["L[i]", "Det(A - I * L[i])"]
>>> Result.show(mt, coltitles = ct, rowtitles = rt)
Checking the Eigenvalues (Det(A - I * L[i]) should be zero):
i   L[i]  Det(A - I * L[i])
0: -61.7,            -0E-34,
1: -27.7,            -0E-34,
2:  4.34,             0E-35,
3:  25.8,             0E-34,
4:  62.5,             0E-34,
5:   311,             0E-33,


>>> for i in range(V.rows):
>>>     AV = AC * V.col(i); VL = V.col(i) * L[i]; X = AV - VL
>>>     Li = "L[" + str(i) + "]"; Vi = "V" + str(i)
>>>     print("Eigenvalue " + Li + ": ", L[i].s())
>>>     Result = V.col(i).concat_horizontal(AV).concat_horizontal(VL).concat_horizontal(X)
>>>     mt = "Checking the properties of eigenvector " + Vi + " (AV - VL should be a zero vector)"
>>>     ct = ["Eigenvector " + Vi, "AV = A * " + Vi, "VL = " + Vi + " * " + Li, "AV - VL"]
>>>     Result.show(mt, coltitles = ct)

Eigenvalue L[0]:  -61.7
Checking the properties of eigenvector V0 (AV - VL should be a zero vector):
Eigenvector V0  AV = A * V0  VL = V0 * L[0]   AV - VL
        0.0719,       -4.44,          -4.44,  3.7E-34,
        -0.550,        33.9,           33.9, -2.2E-33,
        -0.277,        17.1,           17.1,    3E-34,
         0.744,       -45.9,          -45.9,  2.9E-33,
      0.000270,     -0.0166,        -0.0166, 6.52E-34,
        -0.249,        15.4,           15.4, -1.5E-33,

Eigenvalue L[1]:  -27.7
Checking the properties of eigenvector V1 (AV - VL should be a zero vector):
Eigenvector V1  AV = A * V1  VL = V1 * L[1]   AV - VL
        -0.497,        13.8,           13.8,    0E-34,
        -0.562,        15.6,           15.6,    0E-34,
         0.514,       -14.3,          -14.3,   -2E-34,
       -0.0396,        1.10,           1.10, -3.4E-34,
        0.0462,       -1.28,          -1.28,    7E-35,
         0.410,       -11.4,          -11.4,   -6E-34,

Eigenvalue L[2]:  4.34
Checking the properties of eigenvector V2 (AV - VL should be a zero vector):
Eigenvector V2  AV = A * V2  VL = V2 * L[2]    AV - VL
        -0.271,       -1.17,          -1.17,    -4E-35,
        0.0403,       0.175,          0.175,   9.9E-35,
        -0.515,       -2.23,          -2.23,   2.4E-34,
       -0.0409,      -0.177,         -0.177, -4.07E-34,
```

(continues on next page)

(continued from previous page)

```
         0.760,        3.30,           3.30,    -7E-35,
         0.284,        1.23,           1.23,     4E-35,

Eigenvalue L[3]:  25.8
Checking the properties of eigenvector V3 (AV - VL should be a zero vector):
Eigenvector V3  AV = A * V3  VL = V3 * L[3]  AV - VL
         0.730,        18.8,           18.8,   1E-34,
        -0.473,       -12.2,          -12.2,   6E-34,
        0.0931,        2.40,           2.40, 2.8E-34,
        -0.370,       -9.54,          -9.54, 7.1E-34,
         0.310,        7.99,           7.99, 2.6E-34,
        0.0486,        1.25,           1.25,   2E-35,

Eigenvalue L[4]:  62.5
Checking the properties of eigenvector V4 (AV - VL should be a zero vector):
Eigenvector V4  AV = A * V4  VL = V4 * L[4]   AV - VL
        -0.157,       -9.78,          -9.78, 1.05E-33,
        0.0957,        5.98,           5.98, -6.2E-34,
         0.464,        29.0,           29.0, -1.6E-33,
        0.0252,        1.58,           1.58,  1.5E-34,
         0.515,        32.2,           32.2, -1.8E-33,
        -0.697,       -43.5,          -43.5,  2.6E-33,

Eigenvalue L[5]:  311
Checking the properties of eigenvector V5 (AV - VL should be a zero vector):
Eigenvector V5  AV = A * V5  VL = V5 * L[5]   AV - VL
         0.343,         106,            106,   -1E-33,
         0.382,         119,            119,   -3E-33,
         0.412,         128,            128,   -2E-33,
         0.553,         172,            172,   -4E-33,
         0.243,        75.5,           75.5, -1.8E-33,
         0.449,         140,            140,   -1E-33,
```

6.8.5.2 Example for a hermitian matrix: eigenvalues and eigenvectors

```
>>> from xlcalcnet import *
>>> ctx = mp14.dcf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecCplxTableRandomSAA6x6", "")
>>> A = A.top_left_corner(4,4); A.show("A")
A:
   80.0 + 0j, 50.0 - 23.0j, 85.0 + 5.00j, 36.0 - 4.30j,
50.0 + 23.0j,    30.0 + 0j, 43.0 + 9.50j, 27.0 + 11.0j,
85.0 - 5.00j, 43.0 - 9.50j,    85.0 + 0j, 55.0 - 7.00j,
36.0 + 4.30j, 27.0 - 11.0j, 55.0 + 7.00j,    23.0 + 0j,

Query = "Eval, Evec"
Res = A.eigen_SelfAdjointEigenSystem2(Query)

>>> L = Res["Eval"]; ct = ["L[i]"]; rt = ["i"] + [x for x in range(L.rows)]
>>> L.show("Vector L of eigenvalues", coltitles = ct, rowtitles = rt)
Vector L of eigenvalues:
i        L[i]
0: -21.6 + 0j,
1:  3.50 + 0j,
2:  14.1 + 0j,
3:   222 + 0j,

>>> V =  Res["Evec"]; mt = "Matrix V of eigenvectors (V0, ... , V" + str(V.cols-1) + ")"
>>> V.show(mt, coltitles = ["V#"] * (V.cols))
Matrix V of eigenvectors (V0, ... , V3):
             V0                  V1                 V2                 V3
     0.458 + 0j,      -0.419 + 0j,     -0.502 + 0j,      0.602 + 0j,
-0.305 - 0.364j,   0.473 + 0.350j, -0.262 - 0.476j,  0.343 + 0.124j,
-0.472 + 0.234j, -0.225 + 0.0826j,  0.506 + 0.130j, 0.626 - 0.0122j,
```

(continues on next page)

(continued from previous page)

```
 0.523 - 0.113j,   0.586 - 0.278j,  0.390 + 0.164j, 0.336 + 0.0294j,

>>> AC = +A
>>> CheckResult = (AC - V * L.D * V.eigen_inverse()).norm().real
>>> print("||A - V * diag(L) * V^-1|| (should be zero): ", (CheckResult).s())
||A - V * diag(L) * V^-1|| (should be zero):  3.35E-33

>>> X = +A; #X.show("X")
>>> AD = X.diagonal(); #AD.show("AD")
>>> Det = L * 0 # creates a zero vector of the same size and type as L

>>> for i in range(A.rows):
>>>     X.set_diagonal(0, AD - L[i])
>>>     Det[i] = X.eigen_det()

>>> Result = L.concat_horizontal(Det)
>>> mt = "Checking the Eigenvalues (Det(A - I * L[i]) should be zero)"
>>> ct = ["L[i]", "Det(A - I * L[i])"]
>>> Result.show(mt, coltitles = ct, rowtitles = rt)
Checking the Eigenvalues (Det(A - I * L[i]) should be zero):
i        L[i]      Det(A - I * L[i])
0: -21.6 + 0j,  5.65E-29 + 4.39E-30j,
1:  3.50 + 0j,  1.82E-29 - 2.71E-30j,
2:  14.1 + 0j, -1.40E-29 - 2.14E-30j,
3:   222 + 0j,  2.52E-26 - 5.79E-28j,


>>> for i in range(V.rows):
>>>     AV = AC * V.col(i); VL = V.col(i) * L[i]; X = AV - VL
>>>     Li = "L[" + str(i) + "]"; Vi = "V" + str(i)
>>>     print("Eigenvalue " + Li + ": ", L[i].s())
>>>     Result = V.col(i).concat_horizontal(AV).concat_horizontal(VL).concat_horizontal(X)
>>>     mt = "Checking the properties of eigenvector " + Vi + " (AV - VL should be a zero vector)"
>>>     ct = ["Eigenvector " + Vi, "AV = A * " + Vi, "VL = " + Vi + " * " + Li, "AV - VL"]
>>>     Result.show(mt, coltitles = ct)

Eigenvalue L[0]:  -21.6 + 0j
Checking the properties of eigenvector V0 (AV - VL should be a zero vector):
 Eigenvector V0        AV = A * V0  VL = V0 * L[0]               AV - VL
     0.458 + 0j, -9.92 + 5.00E-35j,     -9.92 + 0j, -1.90E-34 + 5.00E-35j,
-0.305 - 0.364j,      6.61 + 7.88j,   6.61 + 7.88j, -7.00E-34 - 3.60E-34j,
-0.472 + 0.234j,      10.2 - 5.06j,   10.2 - 5.06j, -2.00E-34 + 1.40E-34j,
 0.523 - 0.113j,     -11.3 + 2.45j,  -11.3 + 2.45j,  5.00E-34 + 1.00E-34j,

Eigenvalue L[1]:  3.50 + 0j
Checking the properties of eigenvector V1 (AV - VL should be a zero vector):
  Eigenvector V1      AV = A * V1   VL = V1 * L[1]               AV - VL
     -0.419 + 0j,       -1.47 + 0j,      -1.47 + 0j,         2.90E-34 + 0j,
  0.473 + 0.350j,    1.66 + 1.23j,    1.66 + 1.23j,  1.00E-35 + 2.50E-34j,
-0.225 + 0.0826j, -0.789 + 0.290j, -0.789 + 0.290j,  6.30E-35 + 1.43E-34j,
  0.586 - 0.278j,   2.06 - 0.974j,   2.06 - 0.974j, -3.70E-34 + 1.53E-34j,

Eigenvalue L[2]:  14.1 + 0j
Checking the properties of eigenvector V2 (AV - VL should be a zero vector):
 Eigenvector V2        AV = A * V2  VL = V2 * L[2]               AV - VL
    -0.502 + 0j, -7.10 - 3.20E-34j,     -7.10 + 0j,  2.30E-34 - 3.20E-34j,
-0.262 - 0.476j,     -3.70 - 6.73j,  -3.70 - 6.73j, -1.70E-34 - 6.20E-34j,
 0.506 + 0.130j,      7.16 + 1.83j,   7.16 + 1.83j, -3.10E-34 - 5.00E-34j,
 0.390 + 0.164j,      5.52 + 2.32j,   5.52 + 2.32j, -1.20E-34 - 1.90E-34j,

Eigenvalue L[3]:  222 + 0j
Checking the properties of eigenvector V3 (AV - VL should be a zero vector):
 Eigenvector V3      AV = A * V3  VL = V3 * L[3]                AV - VL
     0.602 + 0j, 134 + 1.40E-34j,       134 + 0j,         0 + 1.40E-34j,
 0.343 + 0.124j,    76.1 + 27.4j,   76.1 + 27.4j, -1.20E-33 - 8.00E-34j,
0.626 - 0.0122j,     139 - 2.72j,    139 - 2.72j, -1.00E-33 + 7.00E-35j,
```

(continues on next page)

(continued from previous page)

```
0.336 + 0.0294j,    74.5 + 6.54j,   74.5 + 6.54j, -1.20E-33 + 1.10E-34j,
```

6.8.6 Generalized Selfadjoint Eigensystem, only eigenvalues

`ctx.mat_generalized_self_adjoint_eigen_values(matA, Query)`

Returns the eigendecomposition of a generalized selfadjoint eigensystem.

Writing `matA.GeneralizedSelfAdjointEigenValues(Query)` has the same effect

See also Eigen [226], Wikipedia [1428], Wikipedia [1423], Wikipedia [1397].

Parameters:

Query
Required. A string specifying which items of the result section should be computed.

Results:

eval
Returns the eigenvalues of given matrix.

evec
Returns the eigenvectors of given matrix.

The generalized eigenvalues and eigenvectors of a matrix pair A and B are scalars λ and vectors v such that $Av = \lambda Bv$. If D is a diagonal matrix with the eigenvalues on the diagonal, and V is a matrix with the eigenvectors as its columns, then $AV = BVD$. The matrix V is almost always invertible, in which case we have $A = BVDV^{-1}$. This is called the generalized eigen-decomposition.

This class solves the generalized eigenvalue problem $Av = \lambda Bv$. In this case, the matrix A should be selfadjoint and the matrix B should be positive definite. Only the lower triangular part of the input matrix is referenced.

Parameters: [in] matA Selfadjoint matrix in matrix pencil. Only the lower triangular part of the matrix is referenced. [in] matB Positive-definite matrix in matrix pencil. Only the lower triangular part of the matrix is referenced. [in] options A or-ed set of flags ComputeEigenvectors,EigenvaluesOnly - `Ax_lBx,ABx_lx,BAx_lx`. Default is ComputeEigenvectors `Ax_lBx`.

Computes the eigenvalues and (if requested) the eigenvectors of the generalized eigenproblem $Ax = \lambda Bx$ with matA the selfadjoint matrix A and matB the positive definite matrix B. Each eigenvector x satisfies the property $x^T Bx = 1$. The eigenvectors are computed if options contains ComputeEigenvectors. In addition, the two following variants can be solved via options:

`ABx_lx`: $ABx = \lambda x$

`BAx_lx`: $BAx = \lambda x$

Computes generalized eigendecomposition of given matrix pencil. Parameters [in] matA Selfadjoint matrix in matrix pencil. Only the lower triangular part of the matrix is referenced. [in] matB Positive-definite matrix in matrix pencil. Only the lower triangular part of the matrix is referenced. [in] options A or-ed set of flags

ComputeEigenvectors,EigenvaluesOnly `Ax_lBx,ABx_lx,BAx_lx`. Default is ComputeEigenvectors `Ax_lBx`. According to options, this function computes eigenvalues and (if requested) the eigenvectors of one of the following three generalized eigenproblems:

`Ax_lBx`: $Ax = \lambda Bx$

`ABx_lx`: $ABx = \lambda x$

`BAx_lx`: $BAx = \lambda x$

with matA the selfadjoint matrix A and matB the positive definite matrix B. In addition, each eigenvector satisfies the property $x * Bx = 1$.The eigenvalues() function can be used to retrieve the eigenvalues. If options contains ComputeEigenvectors, then the eigenvectors are also computed and can be retrieved by calling eigenvectors().

The implementation uses LLT to compute the Cholesky decomposition $B = LL^T$ and computes the classical eigendecomposition of the selfadjoint matrix L^{-1} A(L*)^{-1} if options contains `Ax_lBx` and of $L * AL$ otherwise. This solves the generalized eigenproblem, because any solution of the generalized eigenproblem Ax = lambda Bx corresponds to a solution $L^{-1}A(L*)^{-1}(L*x) = \lambda(L * x)$ of the eigenproblem for $L^{-1}A(L*)^{-1}$. Similar statements can be made for the two other variants.

6.8.6.1 Example for a real symmetric matrix: eigenvalues only

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableRandomSAPosDefB6x6", "")
>>> A.show("A (real symmetric)")
A (real symmetric):
60, 58, 65, 68, 23, 45,
58, 63, 65, 70, 20, 48,
65, 65, 88, 85, 33, 50,
68, 70, 85, 95, 35, 58,
23, 20, 33, 35, 25, 17,
45, 48, 50, 58, 17, 45,

>>> B = ctx.read_from_sqlite(mp14.dbpath(), "DecTableRandomSAPosDefA6x6", "")
>>> B.show("B (real symmetric positive definite)")
B (real symmetric positive definite):
248,  40,  38,  43,  33,  35,
 40, 240,  25,  38,  28,  35,
 38,  25, 245,  40,  33,  17,
 43,  38,  40, 250,  30,  33,
 33,  28,  33,  30, 240,  22,
 35,  35,  17,  33,  22, 243,

>>> Query = "Eval"
>>> Res = A.eigen_GeneralizedSelfAdjointEigenValues2(Query, B)

>>> L = Res["Eval"]; ct = ["L[i]"]; rt = ["i"] + [x for x in range(L.rows)]
>>> L.show("Vector L of eigenvalues", coltitles = ct, rowtitles = rt)
Vector L of eigenvalues:
i    L[i]
0: 0.0114,
1: 0.0163,
2: 0.0282,
3: 0.0455,
4: 0.0952,
5:  0.850,
>>> Det = L * 0 # creates a zero vector of the same size and type as L

>>> for i in range(A.rows):
>>>     X = A - B * L[i]
>>>     Det[i] = X.eigen_det()

>>> Result = L.concat_horizontal(Det)
>>> mt = "Checking the Eigenvalues (Det(A - B * L[i]) should be zero)"
>>> ct = ["L[i]", "Det(A - B * L[i])"]
>>> Result.show(mt, coltitles = ct, rowtitles = rt)
Checking the Eigenvalues (Det(A - B * L[i]) should be zero):
i    L[i]  Det(A - B * L[i])
0: 0.0114,         -3.12E-29,
1: 0.0163,         -1.30E-30,
2: 0.0282,         -6.39E-29,
3: 0.0455,          2.67E-28,
4: 0.0952,         -7.75E-27,
5:  0.850,          1.43E-21,
```

6.8.6.2 Example for a hermitian matrix: eigenvalues only

```
>>> from xlcalcnet import *
>>> ctx = mp14.dcf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecCplxTableRandomSAPosDefA6x6", "")
>>> A = A.top_left_corner(4,4); A.show("A (hermitian)")
A (hermitian):
   91.0 + 0j, 12.0 - 3.60j, 22.0 - 7.40j, 14.0 + 1.10j,
12.0 + 3.60j,    77.0 + 0j, 2.50 - 2.00j, 3.40 - 7.60j,
22.0 + 7.40j, 2.50 + 2.00j,    91.0 + 0j, 17.0 + 3.70j,
```

(continues on next page)

(continued from previous page)

```
14.0 - 1.10j, 3.40 + 7.60j, 17.0 - 3.70j,    74.0 + 0j,

>>> B = ctx.read_from_sqlite(mp14.dbpath(), "DecCplxTableRandomSAPosDefB6x6", "")
>>> B = B.top_left_corner(4,4); B.show("B (hermitian positive definite)")
B (hermitian positive definite):
   85.0 + 0j, 7.30 + 1.40j, 9.20 + 2.30j, 3.10 + 1.80j,
7.30 - 1.40j,    73.0 + 0j, 19.0 - 1.80j, 3.70 + 2.00j,
9.20 - 2.30j, 19.0 + 1.80j,    89.0 + 0j, 13.0 - 8.30j,
3.10 - 1.80j, 3.70 - 2.00j, 13.0 + 8.30j,    84.0 + 0j,

>>> Query = "Eval"
>>> Res = A.eigen_GeneralizedSelfAdjointEigenValues2(Query, B)

>>> L = Res["Eval"]; ct = ["L[i]"]; rt = ["i"] + [x for x in range(L.rows)]
>>> L.show("Vector L of eigenvalues", coltitles = ct, rowtitles = rt)
i       L[i]
0: 57.8 + 0j,
1: 67.0 + 0j,
2: 81.6 + 0j,
3:  127 + 0j,

>>> Det = L * 0 # creates a zero vector of the same size and type as L

>>> for i in range(A.rows):
>>>     X = A - B * L[i]
>>>     Det[i] = X.eigen_det()

>>> Result = L.concat_horizontal(Det)
>>> mt = "Checking the Eigenvalues (Det(A - B * L[i]) should be zero)"
>>> ct = ["L[i]", "Det(A - B * L[i])"]
>>> Result.show(mt, coltitles = ct, rowtitles = rt)
Checking the Eigenvalues (Det(A - B * L[i]) should be zero):
i       L[i]     Det(A - B * L[i])
0: 57.8 + 0j, 4.30E+14 + 2.49E-23j,
1: 67.0 + 0j, 7.87E+14 + 5.51E-23j,
2: 81.6 + 0j, 1.75E+15 + 5.75E-23j,
3:  127 + 0j, 1.03E+16 + 1.19E-21j,
```

6.8.7 Generalized Selfadjoint Eigensystem: eigenvalues and eigenvectors

`ctx.mat_generalized_self_adjoint_eigen_system`(*matA*, *Query*)

Returns the eigendecomposition of a generalized selfadjoint eigensystem.

Writing `matA.GeneralizedSelfAdjointEigenSolver(Query)` has the same effect

See also Eigen [226], Wikipedia [1428], Wikipedia [1423], Wikipedia [1397].

Parameters:

Query
Required. A string specifying which items of the result section should be computed.

Results:

eval
Returns the eigenvalues of given matrix.

evec
Returns the eigenvectors of given matrix.

6.8.7.1 Example for a real symmetric matrix: eigenvalues and eigenvectors

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableRandomSAPosDefB6x6", "")
>>> A.show("A (real symmetric)")
A (real symmetric):
60, 58, 65, 68, 23, 45,
58, 63, 65, 70, 20, 48,
65, 65, 88, 85, 33, 50,
68, 70, 85, 95, 35, 58,
23, 20, 33, 35, 25, 17,
45, 48, 50, 58, 17, 45,

>>> B = ctx.read_from_sqlite(mp14.dbpath(), "DecTableRandomSAPosDefA6x6", "")
>>> B.show("B (real symmetric positive definite)")
B (real symmetric positive definite):
248,  40,  38,  43,  33,  35,
 40, 240,  25,  38,  28,  35,
 38,  25, 245,  40,  33,  17,
 43,  38,  40, 250,  30,  33,
 33,  28,  33,  30, 240,  22,
 35,  35,  17,  33,  22, 243,

>>> Query = "Eval, Evec"
>>> Res = A.eigen_GeneralizedSelfAdjointEigenSolver2(Query, B)

>>> L = Res["Eval"]; ct = ["L[i]"]; rt = ["i"] + [x for x in range(L.rows)]
>>> L.show("Vector L of eigenvalues", coltitles = ct, rowtitles = rt)
Vector L of eigenvalues:
i    L[i]
0: 0.0114,
1: 0.0163,
2: 0.0282,
3: 0.0455,
4: 0.0952,
5:  0.850,

>>> V =  Res["Evec"]; mt = "Matrix V of eigenvectors (V0, ... , V" + str(V.cols-1) + ")"
>>> V.show(mt, coltitles = ["V#"] * (V.cols))
Matrix V of eigenvectors (V0, ... , V5):
      V0       V1        V2       V3       V4       V5
  0.0347, 0.00906,  -0.0464,  0.0197, -0.0160,  0.0172,
```

(continues on next page)

(continued from previous page)

```
 -0.0472, -0.0274, -0.00784, 0.00953, -0.0293,  0.0215,
-0.00569,  0.0245,   0.0310,  0.0386,  0.0196,  0.0292,
  0.0276, -0.0386,   0.0178, -0.0275,  0.0143,  0.0282,
 -0.0247, 0.00690,  -0.0328, -0.0181,  0.0481, 0.00121,
-0.00467,  0.0434,   0.0104, -0.0400, -0.0216,  0.0157,

>>> # Vinv = V^-1 = V.H
>>> Vinv = V.eigen_inverse(); Vinv.show(" V^-1")
>>> CheckResult = (A - V * L.D * Vinv).norm()
>>> print("||A - B * V * diag(L) * V^-1|| (should be zero): ", (CheckResult).s())
||A - V * diag(L) * V^-1|| (should be zero):  4.59E-33

>>> Det = L * 0 # creates a zero vector of the same size and type as L

>>> for i in range(A.rows):
>>>     X = A - B * L[i]
>>>     Det[i] = X.eigen_det()

>>> Result = L.concat_horizontal(Det)
>>> mt = "Checking the Eigenvalues (Det(A - B * L[i]) should be zero)"
>>> ct = ["L[i]", "Det(A - B * L[i])"]
>>> Result.show(mt, coltitles = ct, rowtitles = rt)
Checking the Eigenvalues (Det(A - B * L[i]) should be zero):
i    L[i]  Det(A - B * L[i])
0: 0.0114,         -3.12E-29,
1: 0.0163,         -1.30E-30,
2: 0.0282,         -6.39E-29,
3: 0.0455,          2.67E-28,
4: 0.0952,         -7.75E-27,
5:  0.850,          1.43E-21,


>>> for i in range(V.rows):
>>>     AV = A * V.col(i); BVL = (B * L[i]) * V.col(i); X = AV - BVL
>>>     Li = "L[" + str(i) + "]"; Vi = "V" + str(i)
>>>     print("Eigenvalue " + Li + ": ", L[i].s())
>>>     Result = V.col(i).concat_horizontal(AV).concat_horizontal(BVL).concat_horizontal(X)
>>>     mt = "Checking the properties of eigenvector " + Vi + " (AV - BVL should be a zero vector)"
>>>     ct = ["Eigenvector " + Vi, "AV = A * " + Vi, "BVL = B * " + Vi + " * " + Li, "   AV - BVL"]
>>>     Result.show(mt, coltitles = ct)

Eigenvalue L[0]:  0.0114
Checking the properties of eigenvector V0 (AV - BVL should be a zero vector):
Eigenvector V0  AV = A * V0  BVL = B * V0 * L[0]     AV - BVL
        0.0347,      0.0769,              0.0769,    1.89E-35,
       -0.0472,      -0.113,              -0.113,     3.6E-35,
      -0.00569,     -0.0120,             -0.0120,    6.23E-35,
        0.0276,      0.0627,              0.0627,    4.16E-35,
       -0.0247,     -0.0637,             -0.0637,    1.67E-35,
      -0.00467,     -0.0149,             -0.0149,    2.83E-35,

Eigenvalue L[1]:  0.0163
Checking the properties of eigenvector V1 (AV - BVL should be a zero vector):
Eigenvector V1  AV = A * V1  BVL = B * V1 * L[1]     AV - BVL
       0.00906,      0.0354,              0.0354,   -2.30E-35,
       -0.0274,     -0.0876,             -0.0876,   -1.54E-35,
        0.0245,      0.0832,              0.0832,    2.3E-36,
       -0.0386,      -0.125,              -0.125,     -6E-36,
       0.00690,      0.0293,              0.0293,   -1.1E-36,
        0.0434,       0.150,               0.150,     -7E-36,

Eigenvalue L[2]:  0.0282
Checking the properties of eigenvector V2 (AV - BVL should be a zero vector):
Eigenvector V2  AV = A * V2  BVL = B * V2 * L[2]     AV - BVL
       -0.0464,      -0.299,              -0.299,     1.5E-35,
      -0.00784,     -0.0802,             -0.0802,   -1.53E-35,
```

(continues on next page)

(continued from previous page)

```
        0.0310,       0.154,               0.154,    -3.0E-35,
        0.0178,      0.0776,              0.0776,   -2.38E-35,
       -0.0328,       -0.221,              -0.221,     1.1E-35,
        0.0104,      0.0289,              0.0289,     2.2E-36,

Eigenvalue L[3]:  0.0455
Checking the properties of eigenvector V3 (AV - BVL should be a zero vector):
Eigenvector V3  AV = A * V3  BVL = B * V3 * L[3]     AV - BVL
        0.0197,       0.162,               0.162,    -1.0E-35,
       0.00953,      0.0497,              0.0497,     3.7E-36,
        0.0386,       0.368,               0.368,    -2.2E-35,
       -0.0275,      -0.272,              -0.272,     2.7E-35,
       -0.0181,      -0.175,              -0.175,     1.0E-35,
       -0.0400,      -0.425,              -0.425,     1.4E-35,

Eigenvalue L[4]:  0.0952
Checking the properties of eigenvector V4 (AV - BVL should be a zero vector):
Eigenvector V4  AV = A * V4  BVL = B * V4 * L[4]     AV - BVL
       -0.0160,      -0.281,              -0.281,       6E-36,
       -0.0293,      -0.576,              -0.576,       7E-36,
        0.0196,       0.500,               0.500,    -4.9E-35,
        0.0143,       0.313,               0.313,    -1.8E-35,
        0.0481,        1.03,                1.03,      -4E-35,
       -0.0216,      -0.473,              -0.473,      -5E-36,

Eigenvalue L[5]:  0.850
Checking the properties of eigenvector V5 (AV - BVL should be a zero vector):
Eigenvector V5  AV = A * V5  BVL = B * V5 * L[5]     AV - BVL
        0.0172,        6.83,                6.83,    -1.5E-34,
        0.0215,        7.00,                7.00,    -2.1E-34,
        0.0292,        8.30,                8.30,    -2.5E-34,
        0.0282,        8.79,                8.79,    -2.2E-34,
       0.00121,        3.07,                3.07,      -9E-35,
        0.0157,        5.63,                5.63,    -1.9E-34,
```

6.8.7.2 Example for a hermitian matrix: eigenvalues and eigenvectors

```
>>> from xlcalcnet import *
>>> ctx = mp14.dcf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecCplxTableRandomSAPosDefA6x6", "")
>>> A = A.top_left_corner(4,4); A.show("A (hermitian)")
A (hermitian):
   91.0 + 0j, 12.0 - 3.60j, 22.0 - 7.40j, 14.0 + 1.10j,
12.0 + 3.60j,    77.0 + 0j, 2.50 - 2.00j, 3.40 - 7.60j,
22.0 + 7.40j, 2.50 + 2.00j,    91.0 + 0j, 17.0 + 3.70j,
14.0 - 1.10j, 3.40 + 7.60j, 17.0 - 3.70j,    74.0 + 0j,

>>> B = ctx.read_from_sqlite(mp14.dbpath(), "DecCplxTableRandomSAPosDefB6x6", "")
>>> B = B.top_left_corner(4,4); B.show("B (hermitian positive definite)")
B (hermitian positive definite):
   85.0 + 0j, 7.30 + 1.40j, 9.20 + 2.30j, 3.10 + 1.80j,
7.30 - 1.40j,    73.0 + 0j, 19.0 - 1.80j, 3.70 + 2.00j,
9.20 - 2.30j, 19.0 + 1.80j,    89.0 + 0j, 13.0 - 8.30j,
3.10 - 1.80j, 3.70 - 2.00j, 13.0 + 8.30j,    84.0 + 0j,

>>> Query = "Eval, Evec"
>>> Res = A.eigen_GeneralizedSelfAdjointEigenSolver2(Query, B)

>>> L = Res["Eval"]; ct = ["L[i]"]; rt = ["i"] + [x for x in range(L.rows)]
>>> L.show("Vector L of eigenvalues", coltitles = ct, rowtitles = rt)
Vector L of eigenvalues:
i        L[i]
0: 0.731 + 0j,
1: 0.779 + 0j,
```

(continues on next page)

(continued from previous page)

```
2:  1.15 + 0j,
3:  1.47 + 0j,

>>> V =  Res["Evec"]; mt = "Matrix V of eigenvectors (V0, ... , V" + str(V.cols-1) + ")"
>>> V.show(mt, coltitles = ["V#"] * (V.cols))
Matrix V of eigenvectors (V0, ... , V3):
              V0                  V1                  V2                  V3
0.0609 + 0.00995j, -0.0160 - 0.000497j,  -0.0833 + 0.00552j, 0.0307 - 0.00215j,
-0.0321 - 0.0508j,   0.00344 - 0.0182j,   -0.0405 - 0.0520j, -0.0529 - 0.0594j,
-0.0290 - 0.0350j,    0.0579 - 0.0201j, -0.00730 + 0.00466j,  0.0488 + 0.0641j,
-0.0469 + 0.0140j,   -0.0206 + 0.0834j,   -0.0120 - 0.0120j,  0.0395 - 0.0268j,

>>> # Vinv = V^-1 = V.H
>>> Vinv = V.eigen_inverse(); Vinv.show(" V^-1")
>>> CheckResult = (A - V * L.D * Vinv).norm()
>>> print("||A - B * V * diag(L) * V^-1|| (should be zero): ", (CheckResult).s())
||A - V * diag(L) * V^-1|| (should be zero):  4.59E-33 + 0j

>>> Det = L * 0 # creates a zero vector of the same size and type as L

>>> for i in range(A.rows):
>>>     X = A - B * L[i]
>>>     Det[i] = X.eigen_det()

>>> Result = L.concat_horizontal(Det)
>>> mt = "Checking the Eigenvalues (Det(A - B * L[i]) should be zero)"
>>> ct = ["L[i]", "Det(A - B * L[i])"]
>>> Result.show(mt, coltitles = ct, rowtitles = rt)
Checking the Eigenvalues (Det(A - B * L[i]) should be zero):
i        L[i]      Det(A - B * L[i])
0: 0.731 + 0j, -1.97E-29 + 2.21E-32j,
1: 0.779 + 0j,         7.30E-30 + 0j,
2:  1.15 + 0j,  3.23E-30 - 1.27E-31j,
3:  1.47 + 0j,  2.56E-28 + 1.89E-31j,


>>> for i in range(V.rows):
>>>     AV = A * V.col(i); BVL = (B * L[i]) * V.col(i); X = AV - BVL
>>>     Li = "L[" + str(i) + "]"; Vi = "V" + str(i)
>>>     print("Eigenvalue " + Li + ": ", L[i].s())
>>>     Result = V.col(i).concat_horizontal(AV).concat_horizontal(BVL).concat_horizontal(X)
>>>     mt = "Checking the properties of eigenvector " + Vi + " (AV - BVL should be a zero vector)"
>>>     ct = ["Eigenvector " + Vi, "AV = A * " + Vi, "BVL = B * " + Vi + " * " + Li, "   AV - BVL"]
>>>     Result.show(mt, coltitles = ct)

Eigenvalue L[0]:  0.731 + 0j
Checking the properties of eigenvector V0 (AV - BVL should be a zero vector):
   Eigenvector V0       AV = A * V0  BVL = B * V0 * L[0]              AV - BVL
0.0609 + 0.00995j, 3.40 + 1.10E-35j,    3.40 + 2.10E-36j, -1.30E-34 + 8.90E-36j,
-0.0321 - 0.0508j,    -1.98 - 3.20j,       -1.98 - 3.20j,  8.00E-35 + 1.00E-34j,
-0.0290 - 0.0350j,    -2.20 - 2.64j,       -2.20 - 2.64j,  1.10E-34 + 1.50E-34j,
-0.0469 + 0.0140j,   -2.95 + 0.201j,      -2.95 + 0.201j,  1.50E-34 + 1.30E-35j,

Eigenvalue L[1]:  0.779 + 0j
Checking the properties of eigenvector V1 (AV - BVL should be a zero vector):
     Eigenvector V1     AV = A * V1  BVL = B * V1 * L[1]              AV - BVL
-0.0160 - 0.000497j,    -0.738 + 0j,        -0.738 + 0j,         2.40E-35 + 0j,
  0.00344 - 0.0182j,  0.743 - 1.19j,       0.743 - 1.19j, -1.10E-35 + 2.00E-35j,
   0.0579 - 0.0201j,  4.30 - 0.652j,       4.30 - 0.652j, -1.00E-34 + 5.00E-36j,
  -0.0206 + 0.0834j, -0.688 + 5.59j,      -0.688 + 5.59j,  2.00E-36 - 9.00E-35j,

Eigenvalue L[2]:  1.15 + 0j
Checking the properties of eigenvector V2 (AV - BVL should be a zero vector):
     Eigenvector V2        AV = A * V2  BVL = B * V2 * L[2]              AV - BVL
 -0.0833 + 0.00552j, -8.53 - 1.00E-36j,   -8.53 + 1.80E-36j,  1.00E-35 - 2.80E-36j,
  -0.0405 - 0.0520j,     -4.28 - 4.16j,       -4.28 - 4.16j, -4.00E-35 - 5.00E-35j,
```

(continues on next page)

(continued from previous page)

```
-0.00730 + 0.00466j,    -2.70 - 0.530j,      -2.70 - 0.530j,  2.00E-35 + 6.20E-35j,
  -0.0120 - 0.0120j,     -1.90 - 1.09j,       -1.90 - 1.09j,         4.00E-35 + 0j,

Eigenvalue L[3]:  1.47 + 0j
Checking the properties of eigenvector V3 (AV - BVL should be a zero vector):
   Eigenvector V3       AV = A * V3  BVL = B * V3 * L[3]               AV - BVL
0.0307 - 0.00215j, 4.08 - 5.00E-36j,    4.08 + 2.00E-36j, -1.60E-34 - 7.00E-36j,
-0.0529 - 0.0594j,    -3.51 - 4.82j,       -3.51 - 4.82j,  1.00E-35 + 9.00E-35j,
 0.0488 + 0.0641j,     5.89 + 5.45j,        5.89 + 5.45j, -2.40E-34 - 1.30E-34j,
 0.0395 - 0.0268j,     4.69 - 1.74j,        4.69 - 1.74j, -1.90E-34 + 6.00E-35j,
```

6.8.8 Tridiagonalization

`ctx.mat_tridiagonalization`(*matA*, *Query*)

Returns the tridiagonal decomposition of a selfadjoint matrix.

Writing `matA.Tridiag(Query)` has the same effect

See also Eigen [239], Wikipedia [1413], Wikipedia [1403], Wikipedia [1398], Wikipedia [1423].

Parameters:

Query
Required. A string specifying which items of the result section should be computed.

Results:

Q
Returns the unitary matrix Q in the decomposition.

T
Returns an expression of the tridiagonal matrix T in the decomposition..

packed
Returns the internal representation of the decomposition.

hcoeff
Returns the Householder coefficients..

diag
Returns the diagonal of the tridiagonal matrix T in the decomposition.

subdiag
Returns the subdiagonal of the tridiagonal matrix T in the decomposition.

This class performs a tridiagonal decomposition of a selfadjoint matrix A such that: $A = QTQ^*$ where Q is unitary and T a real symmetric tridiagonal matrix. A tridiagonal matrix is a matrix which has nonzero elements only on the main diagonal and the first diagonal below and above it. The Hessenberg decomposition of a selfadjoint matrix is in fact a tridiagonal decomposition. This class is used in SelfAdjointEigenSolver to compute the eigenvalues and eigenvectors of a selfadjoint matrix.

6.8.8.1 Example for a real matrix

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableRandomSAA6x6", ""); A.show("A")
A:
44.9, 25.5, 50.0, 47.9, 26.4, 62.0,
25.5, 24.3, 49.1, 95.0, 29.0, 46.6,
50.0, 49.1, 55.5, 84.0, 44.4, 26.7,
47.9, 95.0, 84.0, 64.5, 39.5, 87.5,
26.4, 29.0, 44.4, 39.5, 39.8, 12.3,
62.0, 46.6, 26.7, 87.5, 12.3, 85.0,

>>> Query = "Q, T, Packed, Hcoeff, Diag, Subdiag"
>>> Res = A.eigen_tridiag2(Query)

>>> Q = Res["Q"]; Q.show("Q")
Q:
1,       0,        0,      0,      0,      0,
0, -0.255,    0.648,  0.267,  0.628,  0.220,
0, -0.500,   -0.254,  0.734, -0.127, -0.361,
0, -0.479,    0.538, -0.386, -0.470, -0.332,
0, -0.264, -0.00888,  0.149, -0.455,  0.837,
0, -0.620,   -0.474, -0.468,  0.401,  0.101,
```

(continues on next page)

(continued from previous page)

```
>>> T = Res["T"]; T.show("T")
T:
 44.9, -99.9,     0,     0,     0,     0,
-99.9,   255, -73.7,     0,     0,     0,
    0, -73.7,  11.5,  21.7,     0,     0,
    0,     0,  21.7,  20.2, -49.4,     0,
    0,     0,     0, -49.4, -18.5, -24.2,
    0,     0,     0,     0, -24.2, 0.966,

>>> Res["Packed"].show("Packed")
Packed:
 44.9,   25.5,    50.0,   47.9,  26.4,  62.0,
-99.9,    255,    49.1,   95.0,  29.0,  46.6,
0.399,  -73.7,    11.5,   84.0,  44.4,  26.7,
0.382, -0.192,    21.7,   20.2,  39.5,  87.5,
0.210, 0.0961, -0.0240,  -49.4, -18.5,  12.3,
0.494,  0.526,   0.680, -0.524, -24.2, 0.966,

>>> # Check that Q is unitary, i.e. that QQ^H = I
>>> CheckResult = (Q.I - Q * Q.H).norm()
>>> print("||I - Q * Q.H|| (should be zero): ", CheckResult.s())
    ||I - Q * Q.H|| (should be zero):  1.44E-35

>>> # Check the defining property of the decomposition, i.e. A = QTQ^H
>>> CheckResult = (A - Q * T * Q.H).norm()
>>> print("||A - Q * T * Q^H|| (should be zero): ", CheckResult.s())
    ||A - Q * T * Q^H|| (should be zero):  3.96E-33

>>> diag = Res["Diag"]; subdiag = Res["Subdiag"]
>>> Query = "eval, evec"
>>> evaltridiag = diag.eigen_SelfAdjointEigenSystemFromTridiag2(Query, subdiag)

>>> L = evaltridiag["Eval"]; ct = ["L[i]"]; rt = ["i"] + [x for x in range(L.rows)]
>>> L.show("Vector L of eigenvalues of T", coltitles = ct, rowtitles = rt)
Vector L of eigenvalues of T:
i   L[i]
0: -61.7,
1: -27.7,
2:  4.34,
3:  25.8,
4:  62.5,
5:   311,

>>> V =  evaltridiag["Evec"]; mt = "Matrix V of eigenvectors of T (V0, ... , V" + str(V.cols-1) + ")"
>>> V.show(mt, coltitles = ["V#"] * (V.cols))
Matrix V of eigenvectors of T (V0, ... , V5):
    V0      V1        V2      V3      V4        V5
0.0719, -0.497,   -0.271,  0.730, -0.157,    0.343,
0.0767, -0.361,   -0.110,  0.139, 0.0275,   -0.912,
 0.232, -0.711, -0.00659, -0.555,  0.284,    0.226,
-0.521, 0.0579,   -0.370,  0.108,  0.759,   0.0173,
-0.760, -0.257,   -0.122, -0.257, -0.525, -0.00262,
-0.293, -0.216,    0.873,  0.249,  0.206, 0.000204,

>>> CheckResult = (T - V * L.D * V.T).norm()
>>> print("||T - V * diag(L) * V^T|| (should be zero): ", (CheckResult).s())
    ||T - V * diag(L) * V^T|| (should be zero):  6.70E-33

>>> XA = +A; AD = XA.diagonal(); DetA = L * 0
>>> XT = +T; TD = XT.diagonal(); DetT = L * 0

>>> for i in range(A.rows):
>>>     XA.set_diagonal(0, AD - L[i]); DetA[i] = XA.eigen_det()
>>>     XT.set_diagonal(0, TD - L[i]); DetT[i] = XT.eigen_det()

>>> Result = L.concat_horizontal(DetA).concat_horizontal(DetT)
```

(continues on next page)

(continued from previous page)

```
>>> mt = "Checking the Eigenvalues: Det(A - I * L[i]) and Det(T - I * L[i]) should be zero"
>>> ct = ["L[i]", "Det(A - I * L[i])", "Det(T - I * L[i])"]
>>> rt = ["i"] + [x for x in range(L.rows)]
>>> Result.show(mt, coltitles = ct, rowtitles = rt)
Checking the Eigenvalues: Det(A - I * L[i]) and Det(T - I * L[i]) should be zero:
i   L[i]  Det(A - I * L[i])  Det(T - I * L[i])
0: -61.7,          8.41E-24,          8.69E-24,
1: -27.7,         -4.36E-25,         -5.06E-25,
2:  4.34,          3.49E-26,          4.32E-26,
3:  25.8,          4.92E-25,          2.75E-25,
4:  62.5,         -1.13E-23,         -1.08E-23,
5:   311,         -6.62E-21,         -8.92E-21,
```

6.8.8.2 Example for a complex matrix

```
>>> from xlcalcnet import *
>>> ctx = mp14.dcf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecCplxTableRandomSAA6x6", "")
>>> A = A.top_left_corner(5,5); A.show("A")
A:
   80.0 + 0j, 50.0 - 23.0j, 85.0 + 5.00j, 36.0 - 4.30j, 16.0 - 18.0j,
50.0 + 23.0j,    30.0 + 0j, 43.0 + 9.50j, 27.0 + 11.0j, 50.0 - 24.0j,
85.0 - 5.00j, 43.0 - 9.50j,    85.0 + 0j, 55.0 - 7.00j, 34.0 + 8.50j,
36.0 + 4.30j, 27.0 - 11.0j, 55.0 + 7.00j,    23.0 + 0j, 49.0 + 40.0j,
16.0 + 18.0j, 50.0 + 24.0j, 34.0 - 8.50j, 49.0 - 40.0j,    85.0 + 0j,

>>> Query = "Q, T, Packed, Hcoeff, Diag, Subdiag"
>>> Res = A.eigen_tridiag2(Query)

>>> Q = Res["Q"]; Q.show("Q")
Q:
1.00 + 0j,           0 + 0j,           0 + 0j,            0 + 0j,           0 + 0j,
   0 + 0j,  -0.453 - 0.208j, -0.0465 - 0.186j,    0.480 - 0.389j,   0.144 + 0.558j,
   0 + 0j, -0.770 + 0.0453j,  -0.158 + 0.243j, 0.00105 + 0.0880j,  -0.417 - 0.372j,
   0 + 0j, -0.326 - 0.0390j,   0.258 + 0.207j,   -0.228 + 0.640j,   0.456 + 0.336j,
   0 + 0j,  -0.145 - 0.163j,   0.864 - 0.153j,   -0.224 - 0.314j, -0.0891 - 0.162j,

>>> T = Res["T"]; T.show("T")
T:
80.0 + 0j,  -110 + 0j,     0 + 0j,     0 + 0j,     0 + 0j,
-110 + 0j,   153 + 0j, -59.2 + 0j,     0 + 0j,     0 + 0j,
   0 + 0j, -59.2 + 0j,   104 + 0j,  24.4 + 0j,     0 + 0j,
   0 + 0j,     0 + 0j,  24.4 + 0j, -30.1 + 0j, -19.0 + 0j,
   0 + 0j,     0 + 0j,     0 + 0j, -19.0 + 0j, -4.47 + 0j,

>>> Res["Packed"].show("Packed")
Packed:
       80.0 + 0j,    50.0 - 23.0j,   85.0 + 5.00j, 36.0 - 4.30j, 16.0 - 18.0j,
       -110 + 0j,         153 + 0j,   43.0 + 9.50j, 27.0 + 11.0j, 50.0 - 24.0j,
  0.515 - 0.105j,       -59.2 + 0j,        104 + 0j, 55.0 - 7.00j, 34.0 + 8.50j,
0.224 - 0.00528j, -0.161 - 0.271j,       24.4 + 0j,   -30.1 + 0j, 49.0 + 40.0j,
 0.114 + 0.0960j, -0.732 - 0.105j, 0.251 + 0.187j,   -19.0 + 0j,   -4.47 + 0j,

>>> # Check that Q is unitary, i.e. that QQ^H = I
>>> CheckResult = (Q.I - Q * Q.H).norm()
>>> print("||I - Q * Q.H|| (should be zero): ", CheckResult.s())
    ||I - Q * Q.H|| (should be zero):  1.46E-35 + 0j

>>> # Check the defining property of the decomposition, i.e. A = QTQ^H
>>> CheckResult = (A - Q * T * Q.H).norm()
>>> print("||A - Q * T * Q^H|| (should be zero): ", CheckResult.s())
    ||A - Q * T * Q^H|| (should be zero):  2.51E-33 + 0j

>>> diag = Res["Diag"]; subdiag = Res["Subdiag"]; T = Res["T"]
```

(continues on next page)

(continued from previous page)

```
>>> Query = "eval, evec"
>>> evaltridiag = diag.eigen_SelfAdjointEigenSystemFromTridiag2(Query, subdiag)

>>> L = evaltridiag["Eval"]; ct = ["L[i]"]; rt = ["i"] + [x for x in range(L.rows)]
>>> L.show("Vector L of eigenvalues of T", coltitles = ct, rowtitles = rt)
Vector L of eigenvalues of T:
i        L[i]
0: -44.4 + 0j,
1: -10.3 + 0j,
2:  5.28 + 0j,
3:   103 + 0j,
4:   250 + 0j,

>>> V =  evaltridiag["Evec"]; mt = "Matrix V of eigenvectors of T (V0, ... , V" + str(V.cols-1) + ")"
>>> V.show(mt, coltitles = ["V#"] * (V.cols))
Matrix V of eigenvectors of T (V0, ... , V4):
          V0            V1            V2            V3             V4
-0.0991 + 0j,  -0.708 + 0j,   0.190 + 0j,  -0.432 + 0j,    0.515 + 0j,
 -0.112 + 0j,  -0.580 + 0j,   0.129 + 0j,  0.0896 + 0j,   -0.792 + 0j,
 -0.189 + 0j,  -0.282 + 0j, -0.0325 + 0j,   0.881 + 0j,    0.327 + 0j,
  0.876 + 0j, -0.0839 + 0j,   0.443 + 0j,   0.166 + 0j,   0.0288 + 0j,
  0.418 + 0j,  -0.274 + 0j,  -0.866 + 0j, -0.0295 + 0j, -0.00216 + 0j,

>>> CheckResult = (T - V * L.D * V.T).norm()
>>> print("||T - V * diag(L) * V^T|| (should be zero): ", (CheckResult).s())
    ||T - V * diag(L) * V^T|| (should be zero):  9.71E-33 + 0j

>>> XA = +A; AD = XA.diagonal(); DetA = L * 0
>>> XT = +T; TD = XT.diagonal(); DetT = L * 0

>>> for i in range(A.rows):
>>>     XA.set_diagonal(0, AD - L[i]); DetA[i] = XA.eigen_det()
>>>     XT.set_diagonal(0, TD - L[i]); DetT[i] = XT.eigen_det()

>>> Result = L.concat_horizontal(DetA).concat_horizontal(DetT)
>>> mt = "Checking the Eigenvalues: Det(A - I * L[i]) and Det(T - I * L[i]) should be zero"
>>> ct = ["L[i]", "Det(A - I * L[i])", "Det(T - I * L[i])"]
>>> rt = ["i"] + [x for x in range(L.rows)]
>>> Result.show(mt, coltitles = ct, rowtitles = rt)
Checking the Eigenvalues: Det(A - I * L[i]) and Det(T - I * L[i]) should be zero:
i        L[i]      Det(A - I * L[i])  Det(T - I * L[i])
0: -44.4 + 0j, -5.09E-26 - 2.12E-27j,    -2.15E-26 + 0j,
1: -10.3 + 0j,  5.47E-27 + 2.47E-28j,     8.81E-28 + 0j,
2:  5.28 + 0j, -6.37E-29 + 1.87E-27j,     9.68E-28 + 0j,
3:   103 + 0j, -5.10E-25 - 1.96E-26j,    -4.86E-25 + 0j,
4:   250 + 0j,  1.12E-23 + 3.03E-26j,     1.19E-23 + 0j,
```

6.9 Eigen decompositions of general square matrices

6.9.1 Matrix balancing and eigenvalue/eigenvector computation

Diagonal scaling to improve eigenvalue accuracy

See also: James *et al.* [376].

Example from Matlab: https://de.mathworks.com/help/matlab/ref/balance.html

Sample code for Eigen in C++ : https://stackoverflow.com/questions/43151853/eigen-balancing-matrix-for-eigenvalue

```
void balance_matrix(const Eigen::MatrixXd &A, Eigen::MatrixXd &Aprime, Eigen::MatrixXd &D) {
    // https://arxiv.org/pdf/1401.5766.pdf (Algorithm #3)
    const int p = 2;
    double beta = 2; // Radix base (2?)
    Aprime = A;
    D = Eigen::MatrixXd::Identity(A.rows(), A.cols());
    bool converged = false;
    do {
        converged = true;
        for (Eigen::Index i = 0; i < A.rows(); ++i) {
            double c = Aprime.col(i).lpNorm<p>();
            double r = Aprime.row(i).lpNorm<p>();
            double s = pow(c, p) + pow(r, p);
            double f = 1;
            while (c < r / beta) {
                c *= beta;
                r /= beta;
                f *= beta;
            }
            while (c >= r*beta) {
                c /= beta;
                r *= beta;
                f /= beta;
            }
            if (pow(c, p) + pow(r, p) < 0.95*s) {
                converged = false;
                D(i, i) *= f;
                Aprime.col(i) *= f;
                Aprime.row(i) /= f;
            }
        }
    } while (!converged);
}
```

6.9.2 Hessenberg Decomposition

`ctx.mat_hessenberg`(*matA*, *Query*)

Reduces a square matrix to Hessenberg form by an orthogonal similarity transformation.

Writing `matA.Hessenberg(Query)` has the same effect

See also Eigen [227], Wikipedia [1402], Wikipedia [1423].

Parameters:

Query
Required. A string specifying which items of the result section should be computed.

Results:

H
A square matrix of the same type and dimension as A, containing the matrix H in the decomposition $A = QHQ^T$.

Q
A square matrix of the same type and dimension as A, containing the matrix Q in the decomposition $A = QHQ^T$.

packedMatrix
A square matrix of the same type and dimension as A. Returns the internal representation of the decomposition.

hcoeff
A square matrix of the same type and dimension as A. Returns the Householder coefficients of the decomposition.

Reduces a square matrix to Hessenberg form by an orthogonal similarity transformation.

In the real case, the Hessenberg decomposition consists of an orthogonal matrix Q and a Hessenberg matrix H such that $A = QHQ^T = Q^THQ$. An orthogonal matrix is a matrix whose inverse equals its transpose: $Q^{-1} = Q^T$., and $QQ^T = Q^TQ = I$

The Hessenberg decomposition of a complex matrix is $A = QHQ^*$ with Q unitary, that is, $Q^{-1} = Q^*$, and $QQ^* = Q^*Q = I$.

A Hessenberg matrix has zeros below the subdiagonal, so it is almost upper triangular.

6.9.2.1 Example for a real matrix

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableRandomA6x6", ""); A.show("A")

A:
  48,   43,   31,   19,   14,   24,
  46,   10,   20,  4.6,   14,   10,
  27,   39,   13,   34,   29,   37,
 7.1,   42,   15,  2.8,   35,   23,
  23,   50,   42, 0.44,   42,   23,
  12,   50,  1.2,   46,   36,   47,

>>> Query = "H, Q, Hcoeff, Packed"
>>> Res = A.eigen_hessenberg2(Query)

>>> Res["H"].show("H")
H:
   48, -59.6, -10.3,  10.5,  12.3, -5.09,
-59.7,  96.1,  35.2, -1.55, -7.54, -10.7,
    0,  94.1,  26.9,  6.92, -19.6, -27.1,
    0,     0, -24.9, -7.98,  45.0,  9.81,
    0,     0,     0, -3.83,  2.49,  9.07,
    0,     0,     0,     0, -1.38, -2.76,

>>> Res["Q"].show("Q")
Q:
```

(continues on next page)

(continued from previous page)

```
1,      0,      0,       0,      0,      0,
0, -0.770,  0.524, -0.0577,  0.320,  0.162,
0, -0.452, -0.161,   0.398, -0.417, -0.662,
0, -0.119, -0.490,  -0.337,  0.671, -0.426,
0, -0.385, -0.439,  -0.575, -0.473,  0.322,
0, -0.201, -0.516,   0.628,  0.220,  0.501,

>>> Res["Hcoeff"].show("Hcoeff")
Hcoeff:
1.77,
1.29,
1.50,
1.75,
   0,

>>> Res["Packed"].show("Packed")
Packed:
    48, -59.6,  -10.3,   10.5,  12.3, -5.09,
 -59.7,  96.1,   35.2,  -1.55, -7.54, -10.7,
 0.255,  94.1,   26.9,   6.92, -19.6, -27.1,
0.0671, 0.406,  -24.9,  -7.98,  45.0,  9.81,
 0.218, 0.427,  0.492,  -3.83,  2.49,  9.07,
 0.113, 0.444, -0.301, -0.378, -1.38, -2.76,
```

6.9.2.2 Example for a complex matrix

```
>>> from xlcalcnet import *
>>> ctx = mp14.dcf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecCplxTableB6x6", "")
>>> A = A.top_left_corner(5,5); A.show("A")
A:
45.0 + 7.50j, 2.90 + 36.0j, 11.0 + 13.0j, 37.0 + 37.0j, 5.00 + 14.0j,
13.0 + 29.0j, 38.0 + 41.0j, 22.0 + 44.0j, 28.0 + 20.0j, 7.00 + 3.30j,
32.0 + 9.00j, 42.0 + 49.0j, 47.0 + 11.0j, 32.0 + 49.0j, 9.00 + 23.0j,
34.0 + 42.0j, 6.00 + 16.0j, 20.0 + 38.0j, 22.0 + 17.0j, 43.0 + 33.0j,
23.0 + 43.0j, 15.0 + 11.0j, 28.0 + 19.0j, 35.0 + 32.0j, 41.0 + 14.0j,

>>> Query = "H, Q, Hcoeff, Packed"
>>> Res = A.eigen_hessenberg2(Query)

>>> Res["H"].show("H")
H:
45.0 + 7.50j, 18.1 - 51.3j, -17.5 + 4.87j, -25.8 + 10.1j,  18.1 + 13.2j,
  -86.1 + 0j, 92.5 + 84.4j,  14.6 - 49.3j,  4.03 - 10.0j, -2.00 - 20.7j,
      0 + 0j,   -64.4 + 0j,  34.6 + 3.78j,  18.8 - 10.4j,  15.2 - 24.8j,
      0 + 0j,       0 + 0j,    -33.0 + 0j,  19.9 + 19.9j,  3.46 + 20.3j,
      0 + 0j,       0 + 0j,        0 + 0j,     17.5 + 0j, 0.963 - 25.1j,

>>> Res["Q"].show("Q")
Q:
1.00 + 0j,          0 + 0j,           0 + 0j,           0 + 0j,           0 + 0j,
   0 + 0j, -0.151 - 0.337j,   0.179 + 0.305j,   0.728 + 0.398j,   0.129 + 0.183j,
   0 + 0j, -0.372 - 0.105j,  -0.617 + 0.545j, -0.0540 - 0.336j,  -0.105 + 0.213j,
   0 + 0j, -0.395 - 0.488j, -0.0150 - 0.157j,  -0.364 + 0.107j,   0.636 - 0.181j,
   0 + 0j, -0.267 - 0.499j,  0.413 + 0.0291j, -0.213 - 0.0808j, -0.668 - 0.0986j,

>>> Res["Hcoeff"].show("Hcoeff")
Hcoeff:
1.15 - 0.337j,
1.68 + 0.447j,
1.66 - 0.249j,
1.96 - 0.286j,

>>> Res["Packed"].show("Packed")
```

(continues on next page)

(continued from previous page)

```
Packed:
    45.0 + 7.50j,      18.1 - 51.3j,  -17.5 + 4.87j, -25.8 + 10.1j,  18.1 + 13.2j,
      -86.1 + 0j,      92.5 + 84.4j,   14.6 - 49.3j,  4.03 - 10.0j, -2.00 - 20.7j,
0.322 - 0.00339j,        -64.4 + 0j,   34.6 + 3.78j,  18.8 - 10.4j,  15.2 - 24.8j,
  0.430 + 0.298j,  -0.0503 + 0.190j,     -33.0 + 0j,  19.9 + 19.9j,  3.46 + 20.3j,
  0.331 + 0.337j, -0.274 + 0.00564j, 0.288 + 0.308j,     17.5 + 0j, 0.963 - 25.1j,
```

6.9.3 Schur Decomposition

`ctx.mat_schur`(*matA*, *Query*)

Performs a Schur decomposition of a square matrix.

Writing `matA.Schur(Query)` has the same effect

See also Eigen [236], Eigen [222], Wikipedia [1430], Wikipedia [1423].

Parameters:

Query
Required. A string specifying which items of the result section should be computed.

Results:

U
A general matrix of the same type and dimension as A, containing the matrix U in the decomposition.

T
A general matrix of the same type and dimension as A, containing the matrix T in the decomposition.

REAL:

Given a real square matrix A, this class computes the real Schur decomposition: $A = UTU^T$ where U is a real orthogonal matrix and T is a real quasi-triangular matrix. An orthogonal matrix is a matrix whose inverse is equal to its transpose, $U^{-1} = U^T$. A quasi-triangular matrix is a block-triangular matrix whose diagonal consists of 1-by-1 blocks and 2-by-2 blocks with complex eigenvalues. The eigenvalues of the blocks on the diagonal of T are the same as the eigenvalues of the matrix A, and thus the real Schur decomposition is used in EigenSolver to compute the eigendecomposition of a matrix.

COMPLEX:

Given a real or complex square matrix A, this class computes the Schur decomposition: where U is a unitary complex matrix, and T is a complex upper triangular matrix. The diagonal of the matrix T corresponds to the eigenvalues of the matrix A.

6.9.3.1 Example for a real matrix

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableRandomA6x6", ""); A.show("A")

A:
  48,   43,   31,   19,   14,   24,
  46,   10,   20,  4.6,   14,   10,
  27,   39,   13,   34,   29,   37,
 7.1,   42,   15,  2.8,   35,   23,
  23,   50,   42, 0.44,   42,   23,
  12,   50,  1.2,   46,   36,   47,

>>> Query = "U, T"
>>> Res = A.eigen_schur2(Query)

>>> Res["U"].show("U")
U:
0.448, -0.245,   0.546,  -0.582, -0.317, 0.0355,
0.283,  0.578,   0.572,   0.481, 0.0718,  0.147,
0.442,  0.344,  -0.230,  -0.241,  0.328, -0.684,
0.312, -0.358, -0.0980,   0.565, -0.534, -0.400,
0.463, -0.512, -0.0393,   0.209,  0.631,  0.283,
0.460,  0.310,  -0.557, -0.0919, -0.323,  0.519,

>>> Res["T"].show("T")
T:
158,  27.1,  34.3,   32.5, -0.516,  19.6,
```

(continues on next page)

(continued from previous page)

```
  0, -20.8, -3.79, -0.982,  -31.1,  2.71,
  0,     0,  21.2,  -47.3,   1.06, -21.6,
  0,     0,     0,  -5.80,   25.8,  6.25,
  0,     0,     0,  -13.8,   12.4, -9.59,
  0,     0,     0,      0,      0, -2.45,
```

6.9.3.2 Example for a complex matrix

```
>>> from xlcalcnet import *
>>> ctx = mp14.dcf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecCplxTableB6x6", "")
>>> A = A.top_left_corner(5,5); A.show("A")
A:
45.0 + 7.50j, 2.90 + 36.0j, 11.0 + 13.0j, 37.0 + 37.0j, 5.00 + 14.0j,
13.0 + 29.0j, 38.0 + 41.0j, 22.0 + 44.0j, 28.0 + 20.0j, 7.00 + 3.30j,
32.0 + 9.00j, 42.0 + 49.0j, 47.0 + 11.0j, 32.0 + 49.0j, 9.00 + 23.0j,
34.0 + 42.0j, 6.00 + 16.0j, 20.0 + 38.0j, 22.0 + 17.0j, 43.0 + 33.0j,
23.0 + 43.0j, 15.0 + 11.0j, 28.0 + 19.0j, 35.0 + 32.0j, 41.0 + 14.0j,

>>> Query = "U, T"
>>> Res = A.eigen_schur2(Query)

>>> Res["U"].show("U")
U:
 0.338 + 0.106j, -0.0858 - 0.301j,   0.235 - 0.292j, -0.271 - 0.686j, -0.0756 - 0.294j,
 0.409 + 0.152j,  -0.572 + 0.142j,  -0.532 + 0.134j, 0.357 - 0.0924j,  0.0672 - 0.142j,
0.522 + 0.0826j, -0.0964 + 0.376j,   0.507 - 0.348j,  0.129 + 0.234j,  0.0787 + 0.338j,
 0.443 + 0.121j,   0.286 - 0.234j,  -0.153 + 0.362j, -0.381 + 0.116j,   0.559 + 0.165j,
0.438 + 0.0389j,   0.464 - 0.229j, -0.149 + 0.0612j,  0.210 + 0.215j, -0.644 - 0.0920j,

>>> Res["T"].show("T")
T:
125 + 131j, 6.55 - 27.8j, -1.71 - 17.5j,  4.81 - 19.6j,  14.2 + 15.8j,
    0 + 0j, 43.0 + 29.8j, 0.609 + 17.6j,  13.8 - 10.4j, -5.47 - 18.4j,
    0 + 0j,       0 + 0j,  10.5 - 45.0j, -11.8 - 20.4j, -5.32 + 18.9j,
    0 + 0j,       0 + 0j,        0 + 0j,  21.7 - 13.7j,  4.33 + 21.6j,
    0 + 0j,       0 + 0j,        0 + 0j,        0 + 0j, -7.36 - 11.2j,
```

6.9.4 Eigensystem of a general square matrix: only eigenvalues

`ctx.mat_eigen_values`(*matA*, *Query*)

Returns the eigendecomposition of a general square matrix *matA* $= A$.

Writing `matA.EigenValues(Query)` has the same effect

See also Eigen [221], Wikipedia [1396], Wikipedia [1398], Wikipedia [1423].

Parameters:

Query
Required. A string specifying which items of the result section should be computed.

Results:

eval
Returns the eigenvalues of given matrix.

evec
Returns the eigenvectors of given matrix.

Computes eigenvalues and eigenvectors of general matrices. The eigenvalues and eigenvectors of a matrix A are scalars λ and vectors v such that $Av = \lambda v$. If D is a diagonal matrix with the eigenvalues on the diagonal, and V is a matrix with the eigenvectors as its columns, then $AV = VD$. The matrix V is almost always invertible, in which case we have $A = VDV^{-1}$. This is called the eigendecomposition. The eigenvalues and eigenvectors of a matrix may be complex, even when the matrix is real. However, we can choose real matrices V and D satisfying $AV = VD$, just like the eigendecomposition, if the matrix D is not required to be diagonal, but if it is allowed to have blocks of the form

$$\begin{bmatrix} \mathbf{u} & \mathbf{v} \\ -\mathbf{v} & \mathbf{u} \end{bmatrix}$$

(where u and v are real numbers) on the diagonal. These blocks correspond to complex eigenvalue pairs $u \pm iv$. We call this variant of the eigendecomposition the pseudo-eigendecomposition.

Call the function compute() to compute the eigenvalues and eigenvectors of a given matrix. Alternatively, you can use the EigenSolver(const MatrixType, bool) constructor which computes the eigenvalues and eigenvectors at construction time. Once the eigenvalue and eigenvectors are computed, they can be retrieved with the eigenvalues() and eigenvectors() functions. The pseudoEigenvalueMatrix() and pseudoEigenvectors() methods allow the construction of the pseudo-eigendecomposition.

The matrix is first reduced to real Schur form using the RealSchur (or Complex) class. The Schur decomposition is then used to compute the eigenvalues and eigenvectors. The cost of the computation is dominated by the cost of the Schur decomposition, which is very approximately 25n3 (where n is the size of the matrix) if computeEigenvectors is true, and 10n3 if computeEigenvectors is false. This method reuses of the allocated data in the EigenSolver object.

6.9.4.1 Example for a real matrix: only eigenvalues

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableRandomA6x6", ""); A.show("A")

A:
  48,   43,   31,   19,   14,   24,
  46,   10,   20,  4.6,   14,   10,
  27,   39,   13,   34,   29,   37,
 7.1,   42,   15,  2.8,   35,   23,
  23,   50,   42, 0.44,   42,   23,
  12,   50,  1.2,   46,   36,   47,

>>> Query = "Eval"
>>> Res = A.eigen_EigenValues2(Query)
```

(continues on next page)

(continued from previous page)

```
>>> L = Res["Eval"]; ct = ["L[i]"]; rt = ["i"] + [x for x in range(L.rows)]
>>> L.show("Vector L of eigenvalues", coltitles = ct, rowtitles = rt)
Vector L of eigenvalues:
i          L[i]
0:     158 + 0j,
1:   -20.8 + 0j,
2:    21.2 + 0j,
3: 3.32 + 16.6j,
4: 3.32 - 16.6j,
5:   -2.45 + 0j,

>>> X = A.cplx(); #X.show("X")
>>> AD = X.diagonal(); #AD.show("AD")
>>> Det = L * 0 # creates a zero vector of the same size and type as L

>>> for i in range(A.rows):
>>>     X.set_diagonal(0, AD - L[i])
>>>     Det[i] = X.eigen_det()

>>> Result = L.concat_horizontal(Det)
>>> mt = "Checking the Eigenvalues (Det(A - I * L[i]) should be zero)"
>>> ct = ["L[i]", "Det(A - I * L[i])"]
>>> Result.show(mt, coltitles = ct, rowtitles = rt)
Checking the Eigenvalues (Det(A - I * L[i]) should be zero):
i          L[i]      Det(A - I * L[i])
0:     158 + 0j,        -5.37E-23 + 0j,
1:   -20.8 + 0j,         7.82E-26 + 0j,
2:    21.2 + 0j,        -5.20E-26 + 0j,
3: 3.32 + 16.6j, -3.07E-26 - 3.37E-26j,
4: 3.32 - 16.6j, -3.07E-26 + 3.37E-26j,
5:   -2.45 + 0j,         2.78E-28 + 0j,
```

6.9.4.2 Example for a complex matrix: only eigenvalues

```
>>> from xlcalcnet import *
>>> ctx = mp14.dcf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecCplxTableB6x6", ""); A.show("A")

A:
45.0 + 7.50j, 2.90 + 36.0j, 11.0 + 13.0j, 37.0 + 37.0j, 5.00 + 14.0j, 13.0 + 5.00j,
13.0 + 29.0j, 38.0 + 41.0j, 22.0 + 44.0j, 28.0 + 20.0j, 7.00 + 3.30j, 35.0 + 25.0j,
32.0 + 9.00j, 42.0 + 49.0j, 47.0 + 11.0j, 32.0 + 49.0j, 9.00 + 23.0j, 5.50 + 35.0j,
34.0 + 42.0j, 6.00 + 16.0j, 20.0 + 38.0j, 22.0 + 17.0j, 43.0 + 33.0j, 24.0 + 19.0j,
23.0 + 43.0j, 15.0 + 11.0j, 28.0 + 19.0j, 35.0 + 32.0j, 41.0 + 14.0j, 5.00 + 48.0j,
33.0 + 49.0j, 42.0 + 48.0j, 47.0 + 32.0j, 34.0 + 25.0j, 46.0 + 31.0j, 4.70 + 23.0j,

>>> Query = "Eval"
>>> Res = A.eigen_EigenSystem2(Query)

>>> L = Res["Eval"]; ct = ["L[i]"]; rt = ["i"] + [x for x in range(L.rows)]
>>> L.show("Vector L of eigenvalues", coltitles = ct, rowtitles = rt)
Vector L of eigenvalues:
i            L[i]
0: -21.5 + 0.565j,
1:   28.1 + 2.54j,
2:  -11.3 - 39.2j,
3:   9.68 - 43.2j,
4:   42.2 + 28.5j,
5:     150 + 164j,

>>> X = +A; #X.show("X")
>>> AD = X.diagonal(); #AD.show("AD")
>>> Det = L * 0 # creates a zero vector of the same size and type as L
```

(continues on next page)

(continued from previous page)

```
>>> for i in range(A.rows):
>>>     X.set_diagonal(0, AD - L[i])
>>>     Det[i] = X.eigen_det()

>>> Result = L.concat_horizontal(Det)
>>> mt = "Checking the Eigenvalues (Det(A - I * L[i]) should be zero)"
>>> ct = ["L[i]", "Det(A - I * L[i])"]
>>> Result.show(mt, coltitles = ct, rowtitles = rt)
Checking the Eigenvalues (Det(A - I * L[i]) should be zero):
i            L[i]      Det(A - I * L[i])
0: -21.5 + 0.565j,  8.89E-26 - 9.48E-26j,
1:   28.1 + 2.54j, -4.38E-27 + 1.28E-25j,
2:  -11.3 - 39.2j,  1.02E-25 - 3.06E-25j,
3:   9.68 - 43.2j, -2.96E-25 - 6.70E-25j,
4:   42.2 + 28.5j,  1.62E-24 - 1.31E-24j,
5:     150 + 164j,  2.79E-21 - 1.17E-21j,
```

6.9.5 Eigensystem of a general square matrix: eigenvalues and eigenvectors

`ctx.`**`mat_eigen_system`**(*matA*, *Query*)

Returns the eigendecomposition of a general square matrix *matA* $= A$.

Writing `matA.EigenSystem(Query)` has the same effect

See also Eigen [221], Wikipedia [1396], Wikipedia [1398], Wikipedia [1423].

Parameters:

Query
Required. A string specifying which items of the result section should be computed.

Results:

eval
Returns the eigenvalues of given matrix.

evec
Returns the eigenvectors of given matrix.

6.9.5.1 Example for a real matrix: eigenvalues and eigenvectors

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableRandomA6x6", ""); A.show("A")

A:
  48,   43,   31,   19,   14,   24,
  46,   10,   20,  4.6,   14,   10,
  27,   39,   13,   34,   29,   37,
 7.1,   42,   15,  2.8,   35,   23,
  23,   50,   42, 0.44,   42,   23,
  12,   50,  1.2,   46,   36,   47,

>>> Query = "Eval, Evec"
>>> Res = A.eigen_EigenSystem2(Query)

>>> L = Res["Eval"]; ct = ["L[i]"]; rt = ["i"] + [x for x in range(L.rows)]
>>> L.show("Vector L of eigenvalues", coltitles = ct, rowtitles = rt)
Vector L of eigenvalues:
i          L[i]
0:     158 + 0j,
1:   -20.8 + 0j,
2:    21.2 + 0j,
3: 3.32 + 16.6j,
4: 3.32 - 16.6j,
5:   -2.45 + 0j,

>>> V =  Res["Evec"]; mt = "Matrix V of eigenvectors (V0, ... , V" + str(V.cols-1) + ")"
>>> V.show(mt, coltitles = ["V#"] * (V.cols))
        V0           V1            V2                V3                V4            V5
0.448 + 0j, -0.309 + 0j,   0.450 + 0j, -0.0287 + 0.197j, -0.0287 - 0.197j, -0.0395 + 0j,
0.283 + 0j,  0.529 + 0j,   0.440 + 0j,   0.136 + 0.299j,   0.136 - 0.299j,  -0.192 + 0j,
0.442 + 0j,  0.274 + 0j,  -0.353 + 0j,  -0.260 - 0.288j,  -0.260 + 0.288j,  0.0958 + 0j,
0.312 + 0j, -0.401 + 0j,  -0.134 + 0j,  0.245 - 0.0527j,  0.245 + 0.0527j,  -0.451 + 0j,
0.463 + 0j, -0.576 + 0j, -0.0979 + 0j,   0.168 + 0.281j,   0.168 - 0.281j,  -0.274 + 0j,
0.460 + 0j,  0.238 + 0j,  -0.671 + 0j,  -0.282 - 0.672j,  -0.282 + 0.672j,   0.821 + 0j,

>>> AC = A.cplx()
>>> CheckResult = (AC - V * L.D * V.eigen_inverse()).norm().real
>>> print("||A - V * diag(L) * V^-1|| (should be zero): ", (CheckResult).s())
    ||A - V * diag(L) * V^-1|| (should be zero):  4.22E-33
```

(continues on next page)

(continued from previous page)

```
>>> X = A.cplx(); #X.show("X")
>>> AD = X.diagonal(); #AD.show("AD")
>>> Det = L * 0 # creates a zero vector of the same size and type as L

>>> for i in range(A.rows):
>>>     X.set_diagonal(0, AD - L[i])
>>>     Det[i] = X.eigen_det()

>>> Result = L.concat_horizontal(Det)
>>> mt = "Checking the Eigenvalues (Det(A - I * L[i]) should be zero)"
>>> ct = ["L[i]", "Det(A - I * L[i])"]
>>> Result.show(mt, coltitles = ct, rowtitles = rt)
Checking the Eigenvalues (Det(A - I * L[i]) should be zero):
i          L[i]      Det(A - I * L[i])
0:     158 + 0j,        -5.37E-23 + 0j,
1:   -20.8 + 0j,         7.82E-26 + 0j,
2:    21.2 + 0j,        -5.20E-26 + 0j,
3: 3.32 + 16.6j, -3.07E-26 - 3.37E-26j,
4: 3.32 - 16.6j, -3.07E-26 + 3.37E-26j,
5:   -2.45 + 0j,         2.78E-28 + 0j,


>>> for i in range(V.rows):
>>>     AV = AC * V.col(i); VL = V.col(i) * L[i]; X = AV - VL
>>>     Li = "L[" + str(i) + "]"; Vi = "V" + str(i)
>>>     print("Eigenvalue " + Li + ": ", L[i].s())
>>>     Result = V.col(i).concat_horizontal(AV).concat_horizontal(VL).concat_horizontal(X)
>>>     mt = "Checking the properties of eigenvector " + Vi + " (AV - VL should be a zero vector)"
>>>     ct = ["Eigenvector " + Vi, "AV = A * " + Vi, "VL = " + Vi + " * " + Li, "AV - VL"]
>>>     Result.show(mt, coltitles = ct)

Eigenvalue L[0]:  158 + 0j
Checking the properties of eigenvector V0 (AV - VL should be a zero vector):
Eigenvector V0  AV = A * V0  VL = V0 * L[0]         AV - VL
    0.448 + 0j,   70.8 + 0j,      70.8 + 0j,  1.60E-33 + 0j,
    0.283 + 0j,   44.8 + 0j,      44.8 + 0j,         0 + 0j,
    0.442 + 0j,   70.0 + 0j,      70.0 + 0j, -1.00E-34 + 0j,
    0.312 + 0j,   49.4 + 0j,      49.4 + 0j,  2.00E-34 + 0j,
    0.463 + 0j,   73.2 + 0j,      73.2 + 0j,  1.00E-34 + 0j,
    0.460 + 0j,   72.7 + 0j,      72.7 + 0j, -5.00E-34 + 0j,

Eigenvalue L[1]:  -20.8 + 0j
Checking the properties of eigenvector V1 (AV - VL should be a zero vector):
Eigenvector V1  AV = A * V1  VL = V1 * L[1]         AV - VL
   -0.309 + 0j,   6.42 + 0j,      6.42 + 0j, -1.80E-34 + 0j,
    0.529 + 0j,  -11.0 + 0j,     -11.0 + 0j,  6.00E-34 + 0j,
    0.274 + 0j,  -5.69 + 0j,     -5.69 + 0j, -6.00E-35 + 0j,
   -0.401 + 0j,   8.33 + 0j,      8.33 + 0j, -1.00E-34 + 0j,
   -0.576 + 0j,   12.0 + 0j,      12.0 + 0j, -2.00E-34 + 0j,
    0.238 + 0j,  -4.94 + 0j,     -4.94 + 0j, -5.70E-34 + 0j,

Eigenvalue L[2]:  21.2 + 0j
Checking the properties of eigenvector V2 (AV - VL should be a zero vector):
Eigenvector V2  AV = A * V2  VL = V2 * L[2]         AV - VL
    0.450 + 0j,   9.56 + 0j,      9.56 + 0j,  4.00E-35 + 0j,
    0.440 + 0j,   9.35 + 0j,      9.35 + 0j, -7.00E-35 + 0j,
   -0.353 + 0j,  -7.50 + 0j,     -7.50 + 0j,  4.70E-34 + 0j,
   -0.134 + 0j,  -2.85 + 0j,     -2.85 + 0j,  1.90E-34 + 0j,
  -0.0979 + 0j,  -2.08 + 0j,     -2.08 + 0j,  2.10E-34 + 0j,
   -0.671 + 0j,  -14.3 + 0j,     -14.3 + 0j,  6.00E-34 + 0j,

Eigenvalue L[3]:  3.32 + 16.6j
Checking the properties of eigenvector V3 (AV - VL should be a zero vector):
  Eigenvector V3     AV = A * V3  VL = V3 * L[3]               AV - VL
-0.0287 + 0.197j, -3.35 + 0.178j, -3.35 + 0.178j, 5.10E-34 + 2.10E-34j,
  0.136 + 0.299j,  -4.50 + 3.25j,  -4.50 + 3.25j, 5.40E-34 + 2.20E-34j,
```

(continues on next page)

(continued from previous page)

```
 -0.260 - 0.288j,   3.91 - 5.27j,   3.91 - 5.27j, 5.70E-34 + 3.60E-34j,
 0.245 - 0.0527j,   1.69 + 3.88j,   1.69 + 3.88j, 5.00E-35 + 2.00E-34j,
  0.168 + 0.281j,  -4.11 + 3.72j,  -4.11 + 3.72j, 3.30E-34 + 4.30E-34j,
 -0.282 - 0.672j,   10.2 - 6.91j,   10.2 - 6.91j, 4.00E-34 + 5.10E-34j,

Eigenvalue L[4]:  3.32 - 16.6j
Checking the properties of eigenvector V4 (AV - VL should be a zero vector):
  Eigenvector V4     AV = A * V4  VL = V4 * L[4]               AV - VL
-0.0287 - 0.197j, -3.35 - 0.178j, -3.35 - 0.178j, 5.10E-34 - 2.10E-34j,
  0.136 - 0.299j,  -4.50 - 3.25j,  -4.50 - 3.25j, 5.40E-34 - 2.20E-34j,
 -0.260 + 0.288j,   3.91 + 5.27j,   3.91 + 5.27j, 5.70E-34 - 3.60E-34j,
 0.245 + 0.0527j,   1.69 - 3.88j,   1.69 - 3.88j, 5.00E-35 - 2.00E-34j,
  0.168 - 0.281j,  -4.11 - 3.72j,  -4.11 - 3.72j, 3.30E-34 - 4.30E-34j,
 -0.282 + 0.672j,   10.2 + 6.91j,   10.2 + 6.91j, 4.00E-34 - 5.10E-34j,

Eigenvalue L[5]:  -2.45 + 0j
Checking the properties of eigenvector V5 (AV - VL should be a zero vector):
Eigenvector V5  AV = A * V5  VL = V5 * L[5]         AV - VL
  -0.0395 + 0j, 0.0969 + 0j,    0.0969 + 0j, -4.84E-34 + 0j,
   -0.192 + 0j,  0.471 + 0j,     0.471 + 0j, -6.40E-34 + 0j,
   0.0958 + 0j, -0.235 + 0j,    -0.235 + 0j, -6.15E-34 + 0j,
   -0.451 + 0j,   1.10 + 0j,      1.10 + 0j, -2.00E-34 + 0j,
   -0.274 + 0j,  0.671 + 0j,     0.671 + 0j, -2.59E-34 + 0j,
    0.821 + 0j,  -2.01 + 0j,     -2.01 + 0j, -5.50E-34 + 0j,
```

6.9.5.2 Example for a complex matrix: eigenvalues and eigenvectors

```
>>> from xlcalcnet import *
>>> ctx = mp14.dcf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecCplxTableB6x6", "")
>>> A = A.top_left_corner(4,4); A.show("A")

A:
45.0 + 7.50j, 2.90 + 36.0j, 11.0 + 13.0j, 37.0 + 37.0j,
13.0 + 29.0j, 38.0 + 41.0j, 22.0 + 44.0j, 28.0 + 20.0j,
32.0 + 9.00j, 42.0 + 49.0j, 47.0 + 11.0j, 32.0 + 49.0j,
34.0 + 42.0j, 6.00 + 16.0j, 20.0 + 38.0j, 22.0 + 17.0j,

>>> Query = "Eval, Evec"
>>> Res = A.eigen_EigenSystem2(Query)

>>> L = Res["Eval"]; ct = ["L[i]"]; rt = ["i"] + [x for x in range(L.rows)]
>>> L.show("Vector L of eigenvalues", coltitles = ct, rowtitles = rt)
Vector L of eigenvalues:
i           L[i]
0: 4.21 - 0.418j,
1:  39.6 + 8.06j,
2:  3.46 - 47.6j,
3:    105 + 116j,

>>> V =  Res["Evec"]; mt = "Matrix V of eigenvectors (V0, ... , V" + str(V.cols-1) + ")"
>>> V.show(mt, coltitles = ["V#"] * (V.cols))
              V0                V1                V2              V3
-0.0249 + 0.483j, -0.589 - 0.212j, -0.319 + 0.0888j, 0.165 + 0.359j,
 0.0587 + 0.501j,  0.346 + 0.299j,   0.326 + 0.144j, 0.208 + 0.513j,
0.00311 - 0.567j, 0.484 + 0.0474j, -0.645 - 0.0595j, 0.358 + 0.473j,
-0.0210 - 0.435j, -0.148 - 0.374j,   0.534 - 0.242j, 0.154 + 0.402j,

>>> AC = +A
>>> CheckResult = (AC - V * L.D * V.eigen_inverse()).norm().real
>>> print("||A - V * diag(L) * V^-1|| (should be zero): ", (CheckResult).s())
||A - V * diag(L) * V^-1|| (should be zero):  2.59E-33

>>> X = +A; #X.show("X")
```

(continues on next page)

(continued from previous page)

```
>>> AD = X.diagonal(); #AD.show("AD")
>>> Det = L * 0 # creates a zero vector of the same size and type as L

>>> for i in range(A.rows):
>>>     X.set_diagonal(0, AD - L[i])
>>>     Det[i] = X.eigen_det()

>>> Result = L.concat_horizontal(Det)
>>> mt = "Checking the Eigenvalues (Det(A - I * L[i]) should be zero)"
>>> ct = ["L[i]", "Det(A - I * L[i])"]
>>> Result.show(mt, coltitles = ct, rowtitles = rt)
Checking the Eigenvalues (Det(A - I * L[i]) should be zero):
i           L[i]     Det(A - I * L[i])
0: 4.21 - 0.418j, 6.96E-29 - 3.88E-29j,
1:  39.6 + 8.06j, 3.40E-28 - 3.72E-28j,
2:  3.46 - 47.6j, 3.35E-30 + 9.69E-29j,
3:    105 + 116j, 2.72E-27 - 2.05E-27j,


>>> for i in range(V.rows):
>>>     AV = AC * V.col(i); VL = V.col(i) * L[i]; X = AV - VL
>>>     Li = "L[" + str(i) + "]"; Vi = "V" + str(i)
>>>     print("Eigenvalue " + Li + ": ", L[i].s())
>>>     Result = V.col(i).concat_horizontal(AV).concat_horizontal(VL).concat_horizontal(X)
>>>     mt = "Checking the properties of eigenvector " + Vi + " (AV - VL should be a zero vector)"
>>>     ct = ["Eigenvector " + Vi, "AV = A * " + Vi, "VL = " + Vi + " * " + Li, "AV - VL"]
>>>     Result.show(mt, coltitles = ct)

Eigenvalue L[0]:  4.21 - 0.418j
Checking the properties of eigenvector V0 (AV - VL should be a zero vector):
  Eigenvector V0     AV = A * V0  VL = V0 * L[0]                AV - VL
-0.0249 + 0.483j, 0.0971 + 2.04j, 0.0971 + 2.04j,  1.98E-34 + 2.00E-34j,
 0.0587 + 0.501j,  0.457 + 2.09j,  0.457 + 2.09j, -2.01E-34 + 3.10E-34j,
0.00311 - 0.567j, -0.224 - 2.39j, -0.224 - 2.39j,  7.70E-35 + 4.10E-34j,
-0.0210 - 0.435j, -0.270 - 1.82j, -0.270 - 1.82j,  4.10E-35 + 8.00E-35j,

Eigenvalue L[1]:  39.6 + 8.06j
Checking the properties of eigenvector V1 (AV - VL should be a zero vector):
 Eigenvector V1    AV = A * V1  VL = V1 * L[1]                AV - VL
-0.589 - 0.212j, -21.6 - 13.1j,  -21.6 - 13.1j,  1.20E-33 + 4.00E-34j,
 0.346 + 0.299j,  11.3 + 14.6j,   11.3 + 14.6j, -6.00E-34 - 6.00E-34j,
0.484 + 0.0474j,  18.8 + 5.78j,   18.8 + 5.78j, -6.00E-34 - 5.90E-34j,
-0.148 - 0.374j, -2.83 - 16.0j,  -2.83 - 16.0j,  1.60E-34 + 3.00E-34j,

Eigenvalue L[2]:  3.46 - 47.6j
Checking the properties of eigenvector V2 (AV - VL should be a zero vector):
  Eigenvector V2    AV = A * V2  VL = V2 * L[2]                AV - VL
-0.319 + 0.0888j,  3.13 + 15.5j,   3.13 + 15.5j,         4.00E-34 + 0j,
  0.326 + 0.144j,  7.99 - 15.0j,   7.99 - 15.0j, -9.00E-35 - 4.00E-34j,
-0.645 - 0.0595j, -5.06 + 30.5j,  -5.06 + 30.5j, -2.70E-34 + 1.00E-34j,
  0.534 - 0.242j, -9.70 - 26.3j,  -9.70 - 26.3j,  8.00E-35 + 3.00E-34j,

Eigenvalue L[3]:  105 + 116j
Checking the properties of eigenvector V3 (AV - VL should be a zero vector):
Eigenvector V3    AV = A * V3  VL = V3 * L[3]               AV - VL
0.165 + 0.359j, -24.5 + 56.8j,  -24.5 + 56.8j, 1.00E-34 + 9.00E-34j,
0.208 + 0.513j, -38.1 + 78.0j,  -38.1 + 78.0j, 6.00E-34 + 2.00E-34j,
0.358 + 0.473j, -17.5 + 91.3j,  -17.5 + 91.3j, 6.00E-34 + 1.00E-34j,
0.154 + 0.402j, -30.7 + 60.1j,  -30.7 + 60.1j,        2.00E-34 + 0j,
```

6.9.6 Real QZ Decomposition

`ctx.mat_real_qz`(*matA*, *Query*, *matB*)

Performs a real QZ decomposition of a pair of square matrices maA $= A$ and matB $= B$.

Writing `matA.RealQZ(Query, matB)` has the same effect

See also Eigen [235], Wikipedia [1417], Wikipedia [1423].

Parameters:

Query
Required. A string specifying which items of the result section should be computed.

B
Optional. A square matrix of the same type and dimensiion as A.

Results:

S
Returns matrix S in the QZ decomposition.

T
Returns matrix T in the QZ decomposition.

Q
Returns matrix Q in the QZ decomposition.

Z
Returns matrix Z in the QZ decomposition.

Given a real square matrices A and B, this class computes the real QZ decomposition: $A = QSZ, B = QTZ$ where Q and Z are real orthogonal matrixes, T is upper-triangular matrix, and S is upper quasi-triangular matrix. An orthogonal matrix is a matrix whose inverse is equal to its transpose, $U^{-1} = U^T$. A quasi-triangular matrix is a block-triangular matrix whose diagonal consists of 1-by-1 blocks and 2-by-2 blocks where further reduction is impossible due to complex eigenvalues.

The eigenvalues of the pencil $A - zB$ can be obtained from 1x1 and 2x2 blocks on the diagonals of S and T. If computeQZ==false, some time is saved by not computing matrices Q and Z.

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableRandomA6x6", "")
>>> A.show("A")
A:
 48, 43,  31,   19, 14, 24,
 46, 10,  20,  4.6, 14, 10,
 27, 39,  13,   34, 29, 37,
7.1, 42,  15,  2.8, 35, 23,
 23, 50,  42, 0.44, 42, 23,
 12, 50, 1.2,   46, 36, 47,

>>> B = ctx.read_from_sqlite(mp14.dbpath(), "DecTableRandomSAA6x6", "")
>>> B.show("B")
B:
44.9, 25.5, 50.0, 47.9, 26.4, 62.0,
25.5, 24.3, 49.1, 95.0, 29.0, 46.6,
50.0, 49.1, 55.5, 84.0, 44.4, 26.7,
47.9, 95.0, 84.0, 64.5, 39.5, 87.5,
26.4, 29.0, 44.4, 39.5, 39.8, 12.3,
62.0, 46.6, 26.7, 87.5, 12.3, 85.0,

>>> Query = "S, T, Q, Z"
>>> Res = A.eigen_realQZ2(Query, B)

>>> Res["S"].show("S"); Res["T"].show("T"); Res["Q"].show("Q"); Res["Z"].show("Z")
```

(continues on next page)

(continued from previous page)

```
S:
  -63.4,    21.2,     2.29,   -7.98,  -109, -78.3,
      0,    54.7,    -9.94,   -22.3, -41.7, -38.8,
      0,       0,    -3.13,    35.8, 0.634,  44.2,
      0,       0,     11.1,    10.1,  15.2,  21.9,
      0,       0,        0,       0,  17.7,  16.6,
      0,       0,        0,       0,     0, -1.85,

T:
  -26.0,    97.8,     19.4,    16.6,  -218,  -121,
      0,    56.9,     41.4,    31.4, -88.6, -49.7,
      0,       0,    -17.9,       0,  28.2,  62.7,
      0,       0,        0,    41.7,  40.0,  15.9,
      0,       0,        0,       0, -72.4, -18.7,
      0,       0,        0,       0,     0,  46.3,

Q:
0.0947,    0.603,  0.134, -0.760,   -0.174, 0.0338,
0.0315,    0.707, -0.256,  0.422,    0.464,  0.201,
 0.444,    0.241,  0.167,  0.302,   -0.256, -0.748,
 0.458,   -0.264, -0.374, -0.371,    0.614, -0.257,
 0.292, -0.00167, -0.745, 0.0408,   -0.558,  0.214,
 0.706,  -0.0920,  0.439,  0.117, -0.00351,  0.536,

Z:
-0.0354,     -0.278,   0.668,  0.0104,  -0.670,  -0.161,
  0.896,     -0.282, -0.0310,   0.325,  0.0639, -0.0829,
 -0.266,     -0.660,   0.323,   0.145,   0.553,   0.249,
 -0.338, -0.0000580,  -0.211,   0.834, -0.0902,  -0.371,
-0.0542,     -0.365,  -0.211,  -0.415,   0.128,  -0.794,
-0.0913,     -0.523,  -0.599, -0.0741,  -0.465,   0.370,

>>> CheckResult = (A - Res["Q"] * Res["S"] *Res["Z"]).norm()
>>> print("||A - Q * S * Z|| (should be zero): ", (CheckResult).s())
||A - Q * S * Z|| (should be zero):  1.11E-32

>>>  CheckResult = (B - Res["Q"] * Res["T"] *Res["Z"]).norm()
>>> print("||B - Q * T * Z|| (should be zero): ", (CheckResult).s())
||B - Q * T * Z|| (should be zero):  1.57E-32
```

6.9.7 PseudoEigenSystem

`ctx.mat_pseudo_eigen_system`(*matA*, *Query*)

Returns the eigenvalues of the general square matrix *matA* $= A$.

Writing `matA.PseudoEigenSystem(Query)` has the same effect

See also Eigen [233], Eigen [234].

Parameters:

Query
Required. A string specifying which items of the result section should be computed.

Results:

pseudoeval
Returns the pseudo-eigenvalues of given matrix.

pseudoevec
Returns the pseudo-eigenvectors of given matrix.

Computes eigenvalues and eigenvectors of general matrices. The eigenvalues and eigenvectors of a matrix A are scalars λ and vectors v such that $Av = \lambda v$. If D is a diagonal matrix with the eigenvalues on the diagonal, and V is a matrix with the eigenvectors as its columns, then $AV = VD$. The matrix V is almost always invertible, in which case we have $A = VDV^{-1}$. This is called the eigendecomposition. The eigenvalues and eigenvectors of a matrix may be complex, even when the matrix is real. However, we can choose real matrices V and D satisfying $AV = VD$, just like the eigendecomposition, if the matrix D is not required to be diagonal, but if it is allowed to have blocks of the form

$$\begin{bmatrix} \mathbf{u} & \mathbf{v} \\ -\mathbf{v} & \mathbf{u} \end{bmatrix}$$

(where u and v are real numbers) on the diagonal. These blocks correspond to complex eigenvalue pairs $u \pm iv$. We call this variant of the eigendecomposition the pseudo-eigendecomposition.

Call the function compute() to compute the eigenvalues and eigenvectors of a given matrix. Alternatively, you can use the EigenSolver(const MatrixType, bool) constructor which computes the eigenvalues and eigenvectors at construction time. Once the eigenvalue and eigenvectors are computed, they can be retrieved with the eigenvalues() and eigenvectors() functions. The pseudoEigenvalueMatrix() and pseudoEigenvectors() methods allow the construction of the pseudo-eigendecomposition.

The matrix is first reduced to real Schur form using the RealSchur (or Complex) class. The Schur decomposition is then used to compute the eigenvalues and eigenvectors. The cost of the computation is dominated by the cost of the Schur decomposition, which is very approximately 25n3 (where n is the size of the matrix) if computeEigenvectors is true, and 10n3 if computeEigenvectors is false. This method reuses of the allocated data in the EigenSolver object.

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableRandomA6x6", "")
>>> A.show("A")
A:
 48, 43,  31,   19, 14, 24,
 46, 10,  20,  4.6, 14, 10,
 27, 39,  13,   34, 29, 37,
7.1, 42,  15,  2.8, 35, 23,
 23, 50,  42, 0.44, 42, 23,
 12, 50, 1.2,   46, 36, 47,

>>> Query = "PseudoEval, PseudoEvec"
>>> Res = A.eigen_PseudoEigenSystem2(Query)

>>> D = Res["PseudoEval"]; D.show("D")
D:
158,     0,    0,     0,    0,     0,
```

(continues on next page)

(continued from previous page)

```
  0, -20.8,    0,     0,    0,     0,
  0,     0, 21.2,     0,    0,     0,
  0,     0,    0,  3.32, 16.6,     0,
  0,     0,    0, -16.6, 3.32,     0,
  0,     0,    0,     0,    0, -2.45,

>>> V = Res["PseudoEvec"]; V.show("V")
V:
0.448, -0.313,  0.464, -0.0997,  0.684, -0.0912,
0.283,  0.535,  0.454,   0.474,   1.04,  -0.443,
0.442,  0.277, -0.364,  -0.905,  -1.00,   0.221,
0.312, -0.406, -0.138,   0.852, -0.183,   -1.04,
0.463, -0.583, -0.101,   0.584,  0.979,  -0.632,
0.460,  0.240, -0.692,  -0.982,  -2.34,    1.89,

>>> Vinv = V.eigen_inverse(); Vinv.show(" V^-1")
 V^-1:
 0.478,  0.587,  0.337,  0.273,  0.423,   0.412,
-0.731,  0.985,  0.336, -0.141, -0.150,  0.0289,
  1.59, 0.0374, -0.514,  0.680,  -1.54, 0.00611,
-0.287,  0.467, -0.869,  0.481, 0.0293,   0.471,
-0.303,  0.129, 0.0641, -0.688,  0.740,  -0.123,
0.0355,  0.147, -0.684, -0.400,  0.283,   0.519,

>>> CheckResult = (A - V * D * Vinv).norm()
>>> print("||A - V * D * V^-1|| (should be zero): ", (CheckResult).s())
||A - V * D * V^-1|| (should be zero):  3.25E-33
```

6.9.8 Real Generalized Nonsymmetric Eigenvalues

`ctx.mat_gen_eigen_values`(*matA*, *Query*, *matB*)

Returns the Generalized Nonsymmetric Eigensystem; Eigenvalues only of the general matrix *matA* $= A$.

Writing `matA.GenEigenValues(Query, matB)` has the same effect

See also Eigen [225], Wikipedia [1428], Wikipedia [1423].

Parameters:

Query
Required. A string specifying which items of the result section should be computed.

Results:

eval
Returns the eigenvalues of given matrix.

evec
Returns the eigenvectors of given matrix.

Computes the generalized eigenvalues and eigenvectors of a pair of general (nonsymmetric) matrices. Currently, only real matrices are supported.

The generalized eigenvalues and eigenvectors of a matrix pair A and B are scalars λ and vectors v such that $Av = \lambda Bv$. If D is a diagonal matrix with the eigenvalues on the diagonal, and V is a matrix with the eigenvectors as its columns, then $AV = BVD$. The matrix V is almost always invertible, in which case we have $A = BVDV^{-1}$. This is called the generalized eigen-decomposition.

The generalized eigenvalues and eigenvectors of a matrix pair may be complex, even when the matrices are real. Moreover, the generalized eigenvalue might be infinite if the matrix B is singular. To workaround this difficulty, the eigenvalues are provided as a pair of complex α and real β such that: $\lambda_i = \alpha_i/\beta_i$. If β_i is (nearly) zero, then one can consider the well defined left eigenvalue $\mu_i = \beta_i/\alpha_i$ such that: $\mu_i A v_i = B v_i$, or even $\mu_i u_i^T A v_i = u_i^T B$, where u_i is called the left eigenvector.

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableRandomA6x6", "")
>>> A.show("A")
A:
 48, 43,  31,   19, 14, 24,
 46, 10,  20,  4.6, 14, 10,
 27, 39,  13,   34, 29, 37,
7.1, 42,  15,  2.8, 35, 23,
 23, 50,  42, 0.44, 42, 23,
 12, 50, 1.2,   46, 36, 47,

>>> B = ctx.read_from_sqlite(mp14.dbpath(), "DecTableRandomSAA6x6", "")
>>> B.show("B")
B:
44.9, 25.5, 50.0, 47.9, 26.4, 62.0,
25.5, 24.3, 49.1, 95.0, 29.0, 46.6,
50.0, 49.1, 55.5, 84.0, 44.4, 26.7,
47.9, 95.0, 84.0, 64.5, 39.5, 87.5,
26.4, 29.0, 44.4, 39.5, 39.8, 12.3,
62.0, 46.6, 26.7, 87.5, 12.3, 85.0,

>>> Query = "Eval"
>>> Res = A.eigen_GenEigenValues2(Query, B)

>>> L = Res["Eval"]; ct = ["L[i]"]; rt = ["i"] + [x for x in range(L.rows)]
>>> L.show("Vector L of eigenvalues", coltitles = ct, rowtitles = rt)
i            L[i]
0:      2.44 + 0j,
1:     0.960 + 0j,
2: 0.209 - 0.729j,
```

(continues on next page)

(continued from previous page)

```
3: 0.209 + 0.729j,
4:    -0.245 + 0j,
5:   -0.0398 + 0j,

>>> Det = L * 0 # creates a zero vector of the same size and type as L

>>> for i in range(A.rows):
>>>     X = A.cplx() - B.cplx() * L[i]
>>>     Det[i] = X.eigen_det()

>>> Result = L.concat_horizontal(Det)
>>> mt = "Checking the Eigenvalues (Det(A - B * L[i]) should be zero)"
>>> ct = ["L[i]", "Det(A - B * L[i])"]
>>> Result.show(mt, coltitles = ct, rowtitles = rt)
Checking the Eigenvalues (Det(A - B * L[i]) should be zero):
i            L[i]      Det(A - B * L[i])
0:      2.44 + 0j,         2.87E-23 + 0j,
1:     0.960 + 0j,         1.17E-25 + 0j,
2: 0.209 - 0.729j, -3.30E-26 + 3.44E-26j,
3: 0.209 + 0.729j, -3.30E-26 - 3.44E-26j,
4:    -0.245 + 0j,        -1.11E-27 + 0j,
5:   -0.0398 + 0j,         3.55E-27 + 0j,
```

6.9.9 Real Generalized Nonsymmetric Eigensystem

`ctx.mat_gen_eigen_system`(*matA*, *Query*, *matB*)

Returns the Generalized Nonsymmetric Eigensystem; Eigenvalues only of the general matrix *matA* $= A$.

Writing `matA.GenEigenSystem(Query, matB)` has the same effect

See also Eigen [225], Wikipedia [1428], Wikipedia [1423].

Parameters:

Query
Required. A string specifying which items of the result section should be computed.

Results:

eval
Returns the eigenvalues of given matrix.

evec
Returns the eigenvectors of given matrix.

```
>>> from xlcalcnet import *
>>> ctx = mp14.drf(); mp14.setdps(35); mp14.setshowdps(3)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableRandomA6x6", "")
>>> A = A.top_left_corner(4,4); A.show("A ")
A :
 48, 43, 31,  19,
 46, 10, 20, 4.6,
 27, 39, 13,  34,
7.1, 42, 15, 2.8,

>>> B = ctx.read_from_sqlite(mp14.dbpath(), "DecTableRandomSAA6x6", "")
>>> B = B.top_left_corner(4,4); B.show("B")
B:
44.9, 25.5, 50.0, 47.9,
25.5, 24.3, 49.1, 95.0,
50.0, 49.1, 55.5, 84.0,
47.9, 95.0, 84.0, 64.5,

>>> Query = "Eval, Evec"
>>> Res = A.eigen_GenEigenSystem2(Query, B)

>>> L = Res["Eval"]; ct = ["L[i]"]; rt = ["i"] + [x for x in range(L.rows)]
>>> L.show("Vector L of eigenvalues", coltitles = ct, rowtitles = rt)
Vector L of eigenvalues:
i            L[i]
0: 0.431 - 0.989j,
1: 0.431 + 0.989j,
2:   -0.0862 + 0j,
3:     0.703 + 0j,

>>> V =  Res["Evec"]; mt = "Matrix V of eigenvectors (V0, ... , V" + str(V.cols-1) + ")"
>>> V.show(mt, coltitles = ["V#"] * (V.cols))
Matrix V of eigenvectors (V0, ... , V3):
              V0                 V1           V2           V3
  0.364 - 0.364j,   0.364 + 0.364j,  0.404 + 0j, -0.581 + 0j,
 -0.281 - 0.488j,  -0.281 + 0.488j,  0.316 + 0j,  0.231 + 0j,
  0.208 + 0.611j,   0.208 - 0.611j, -0.808 + 0j,  0.645 + 0j,
0.0202 + 0.0331j, 0.0202 - 0.0331j, -0.289 + 0j, -0.439 + 0j,

>>> AC = A.cplx(); BC = B.cplx()
>>> # Vinv = V^-1 = V.H
>>> Vinv = V.eigen_inverse(); Vinv.show(" V^-1")
V^-1:
     1.04 + 0.651j,    0.0367 + 1.33j,    0.669 + 0.592j,   -0.376 + 0.707j,
```

(continues on next page)

(continued from previous page)

```
     1.04 - 0.651j,    0.0367 - 1.33j,    0.669 - 0.592j,   -0.376 - 0.707j,
-0.295 + 9.42E-38j, -1.41 - 1.88E-36j, -1.19 - 3.62E-37j, -2.09 - 3.10E-36j,
 0.192 + 1.76E-37j, 0.731 + 1.08E-36j, 0.754 + 8.75E-38j, -1.04 + 1.45E-36j,

>>> CheckResult = (AC - BC * V * L.D * Vinv).norm()
>>> print("||A - B * V * diag(L) * V^-1|| (should be zero): ", (CheckResult).s())
||A - B * V * diag(L) * V^-1|| (should be zero):  2.54E-33 + 0j

>>> Det = L * 0 # creates a zero vector of the same size and type as L

>>> for i in range(A.rows):
>>>     X = AC - BC * L[i]
>>>     Det[i] = X.eigen_det()

>>> Result = L.concat_horizontal(Det)
>>> mt = "Checking the Eigenvalues (Det(A - B * L[i]) should be zero)"
>>> ct = ["L[i]", "Det(A - B * L[i])"]
>>> Result.show(mt, coltitles = ct, rowtitles = rt)
Checking the Eigenvalues (Det(A - B * L[i]) should be zero):
i            L[i]     Det(A - B * L[i])
0: 0.431 - 0.989j, 1.41E-28 - 2.02E-28j,
1: 0.431 + 0.989j, 1.41E-28 + 2.02E-28j,
2:   -0.0862 + 0j,       -1.01E-29 + 0j,
3:     0.703 + 0j,       -8.72E-30 + 0j,


>>> for i in range(V.rows):
>>>     AV = AC * V.col(i); BVL = (BC * L[i]) * V.col(i); X = AV - BVL
>>>     Li = "L[" + str(i) + "]"; Vi = "V" + str(i)
>>>     print("Eigenvalue " + Li + ": ", L[i].s())
>>>     Result = V.col(i).concat_horizontal(AV).concat_horizontal(BVL).concat_horizontal(X)
>>>     mt = "Checking the properties of eigenvector " + Vi + " (AV - BVL should be a zero vector)"
>>>     ct = ["Eigenvector " + Vi, "AV = A * " + Vi, "BVL = B * " + Vi + " * " + Li, "   AV - BVL"]
>>>     Result.show(mt, coltitles = ct)

Eigenvalue L[0]:  0.431 - 0.989j
Checking the properties of eigenvector V0 (AV - BVL should be a zero vector):
  Eigenvector V0    AV = A * V0  BVL = B * V0 * L[0]              AV - BVL
  0.364 - 0.364j,  12.2 - 18.8j,        12.2 - 18.8j,  1.00E-34 + 4.00E-34j,
 -0.281 - 0.488j,  18.2 - 9.23j,        18.2 - 9.23j,         0 + 9.00E-35j,
  0.208 + 0.611j,  2.24 - 19.8j,        2.24 - 19.8j,  1.60E-34 - 2.00E-34j,
0.0202 + 0.0331j, -6.06 - 13.8j,       -6.06 - 13.8j, -4.00E-35 - 4.00E-34j,

Eigenvalue L[1]:  0.431 + 0.989j
Checking the properties of eigenvector V1 (AV - BVL should be a zero vector):
  Eigenvector V1    AV = A * V1  BVL = B * V1 * L[1]              AV - BVL
  0.364 + 0.364j,  12.2 + 18.8j,        12.2 + 18.8j,  1.00E-34 - 4.00E-34j,
 -0.281 + 0.488j,  18.2 + 9.23j,        18.2 + 9.23j,         0 - 9.00E-35j,
  0.208 - 0.611j,  2.24 + 19.8j,        2.24 + 19.8j,  1.60E-34 + 2.00E-34j,
0.0202 - 0.0331j, -6.06 + 13.8j,       -6.06 + 13.8j, -4.00E-35 + 4.00E-34j,

Eigenvalue L[2]:  -0.0862 + 0j
Checking the properties of eigenvector V2 (AV - BVL should be a zero vector):
Eigenvector V2  AV = A * V2  BVL = B * V2 * L[2]        AV - BVL
    0.404 + 0j,   2.42 + 0j,           2.42 + 0j, -1.00E-35 + 0j,
    0.316 + 0j,   4.24 + 0j,           4.24 + 0j, -4.00E-35 + 0j,
   -0.808 + 0j,   2.88 + 0j,           2.88 + 0j,  2.10E-34 + 0j,
   -0.289 + 0j,   3.21 + 0j,           3.21 + 0j,  2.60E-34 + 0j,

Eigenvalue L[3]:  0.703 + 0j
Checking the properties of eigenvector V3 (AV - BVL should be a zero vector):
Eigenvector V3  AV = A * V3  BVL = B * V3 * L[3]        AV - BVL
   -0.581 + 0j,  -6.34 + 0j,          -6.34 + 0j,  1.40E-34 + 0j,
    0.231 + 0j,  -13.6 + 0j,          -13.6 + 0j, -1.00E-34 + 0j,
    0.645 + 0j,  -13.2 + 0j,          -13.2 + 0j,  5.00E-34 + 0j,
   -0.439 + 0j,   14.0 + 0j,           14.0 + 0j,  5.00E-34 + 0j,
```

6.10 Eigen: Polynomials

6.10.1 Building a polynomial from its roots

`ctx.roots_to_monic_poly(`*results*, *matB*`)`

Calculates the monic polynomial from its roots.

See also: Eigen [218].

6.10.2 Polynomial evaluation

`ctx.poly_eval(`*roots*`)`

Evaluates a polynomial

See also: Eigen [218].

6.10.3 Polynomial roots

`ctx.poly_roots()`

Computes all roots (real or complex) of a given polynomial.

See also: Eigen [217].

6.11 Eigen: Fast Fourier Transform

The default implementation is based on kissfft.

The following design decisions were made concerning scaling and half-spectrum for real FFT.

The intent is to facilitate generic programming and ease migrating code from Matlab/octave. We think the default behavior of Eigen/FFT should favor correctness and generality over speed. Of course, the caller should be able to "opt-out" from this behavior and get the speed increase if they want it.

1) Scaling: Other libraries (FFTW,IMKL,KISSFFT) do not perform scaling, so there is a constant gain incurred after the forward&inverse transforms , so IFFT(FFT(x)) = Kx; this is done to avoid a vector-by-value multiply. The downside is that algorithms that worked correctly in Matlab/octave don't behave the same way once implemented in C++.

How Eigen/FFT differs: invertible scaling is performed so IFFT(FFT(x)) = x.

2) Real FFT half-spectrum Other libraries use only half the frequency spectrum (plus one extra sample for the Nyquist bin) for a real FFT, the other half is the conjugate-symmetric of the first half. This saves them a copy and some memory. The downside is the caller needs to have special logic for the number of bins in complex vs real.

How Eigen/FFT differs: The full spectrum is returned from the forward transform. This facilitates generic template programming by obviating separate specializations for real vs complex. On the inverse transform, only half the spectrum is actually used if the output type is real.

6.11.1 Forward transform

`ctx.`**`mat_fft_fwd`**`(`*matA*`)`

Calculates the Fourier transform.

Writing `matA.FFTFwd()` has the same effect

See also: Eigen [206].

6.11.2 Inverse transform

`ctx.`**`mat_fft_inv`**`(`*matA*`)`

Calculates the Fourier transform.

Writing `matA.FFTInv()` has the same effect

See also: Eigen [206].

```
Sub DemoCplxFFT()
    Console.WriteLine("Hello DemoCplxFFT!")
    Dim digits = 15
    Dim n As Int32 = 4
    Dim A, B, TA, TB, TC, C, A2, B2, C2 As New cplx_mat_t
    Dim A_real, B_real, C_Real As New dbl_mat_t

    A.setZero(2*n,1)
    A_real.Random(n, 1)
    For i=0 To n-1
        A(i) = New Complex(A_real(i), 0.0)
    Next
    A.Print("A: ")

    B.setZero(2*n,1)
    B_real.Random(n, 1)
    For i=0 To n-1
        B(i) = New Complex(B_real(i), 0.0)
    Next
    B.Print("B: ")
```

(continues on next page)

(continued from previous page)

```
    TA = A.FFT_Fwd()
    TA.Print("TA: ")

    TB = B.FFT_Fwd()
    TB.Print("TB: ")

    TC.setZero(2*n,1)
    For i=0 To 2*n-1
        TC(i) = TA(i) * TB(i)
    Next
    TC.Print("TC: ")
    C2 = TC.FFT_Inv()
    C2.Print("C2: ")

    C_Real.setZero(2*n,1)
    For i As Integer = 0 To n-1
        For j As Integer = 0 To n-1
            C_Real(i+j) = C_Real(i+j) + A_Real(i) * B_Real(j)
        Next j
    Next i
    C_Real.Print("C_Real: ")
End Sub
```

```
Hello DemoCplxFFT!
A:
-0.997497+0.000000j;
 0.127171+0.000000j;
-0.613392+0.000000j;
 0.617481+0.000000j;
 0.000000+0.000000j;
 0.000000+0.000000j;
 0.000000+0.000000j;
 0.000000+0.000000j;

B:
 0.170019+0.000000j;
-0.040254+0.000000j;
-0.299417+0.000000j;
 0.791925+0.000000j;
 0.000000+0.000000j;
 0.000000+0.000000j;
 0.000000+0.000000j;
 0.000000+0.000000j;

TA:
-0.866237+0.000000j;
-1.344199+0.086843j;
-0.384106+0.490310j;
-0.650796-1.139940j;
-2.355541+0.000000j;
-0.650796+1.139940j;
-0.384106-0.490310j;
-1.344199-0.086843j;

TB:
 0.622272+0.000000j;
-0.418421-0.232094j;
 0.469436+0.832179j;
 0.758458-0.830929j;
-0.881069+0.000000j;
 0.758458+0.830929j;
 0.469436-0.832179j;
-0.418421+0.232094j;
```

(continues on next page)

(continued from previous page)

```
TC:
-0.539036+0.000000j;
 0.582597+0.275644j;
-0.588339-0.089476j;
-1.440810-0.323831j;
 2.075395+0.000000j;
-1.440810+0.323831j;
-0.588339+0.089476j;
 0.582597-0.275644j;

C2:
-0.169593+0.000000j;
 0.061775+0.000000j;
 0.189261+0.000000j;
-0.698345+0.000000j;
 0.259513+0.000000j;
-0.670644+0.000000j;
 0.488999+0.000000j;
 0.000000+0.000000j;

C_Real:
-1.695931E-001;
 6.177455E-002;
 1.892607E-001;
-6.983454E-001;
 2.595135E-001;
-6.706443E-001;
 4.889985E-001;
 0.000000E+000;
```

6.12 Eigen and Numpy (Multiprecision): Functions of matrix argument

6.12.1 Matrix Exponential

`ctx.mat_expm(matA)`

Computes the matrix exponential of a square matrix A, which is defined by the power series $\exp(A) = I + A + \frac{A^2}{2!} + \frac{A^3}{3!} + \ldots$

Writing `matA.ExpMat()` has the same effect

See also: Wikipedia [1414], Wikipedia [1424].

See also: Eigen [209], Eigen [208].

Basic examples:

```
>>> from xlcalcnet import *
>>> mp.dps = 15; mp.pretty = True
>>> expm(zeros(3))
[1.0  0.0  0.0]
[0.0  1.0  0.0]
[0.0  0.0  1.0]
>>> expm(eye(3))
[2.71828182845905               0.0               0.0]
[             0.0  2.71828182845905               0.0]
[             0.0               0.0  2.71828182845905]
>>> expm([[1,1,0],[1,0,1],[0,1,0]])
[ 3.86814500615414  2.26812870852145  0.841130841230196]
[ 2.26812870852145  2.44114713886289   1.42699786729125]
[0.841130841230196  1.42699786729125    1.6000162976327]
>>> expm([[1,1,0],[1,0,1],[0,1,0]], method='pade')
[ 3.86814500615414  2.26812870852145  0.841130841230196]
[ 2.26812870852145  2.44114713886289   1.42699786729125]
[0.841130841230196  1.42699786729125    1.6000162976327]
>>> expm([[1+j, 0], [1+j,1]])
[(1.46869393991589 + 2.28735528717884j)                         0.0]
[  (1.03776739863568 + 3.536943175722j)  (2.71828182845905 + 0.0j)]
```

Matrices with large entries are allowed:

```
>>> expm(matrix([[1,2],[2,3]])**25)
[5.65024064048415e+2050488462815550  9.14228140091932e+2050488462815550]
[9.14228140091932e+2050488462815550  1.47925220414035e+2050488462815551]
```

The identity $\exp(A+B) = \exp(A)\exp(B)$ does not hold for noncommuting matrices:

```
>>> A = hilbert(3)
>>> B = A + eye(3)
>>> chop(mnorm(A*B - B*A))
0.0
>>> chop(mnorm(expm(A+B) - expm(A)*expm(B)))
0.0
>>> B = A + ones(3)
>>> mnorm(A*B - B*A)
1.8
>>> mnorm(expm(A+B) - expm(A)*expm(B))
42.0927851137247
```

6.12.2 Matrix Sine

`ctx.mat_sinm(matA)`

Calculates the sine function of the matrix.

Writing `matA.SinMat()` has the same effect

See also: Wikipedia [1414], Wikipedia [1432].

See also: Eigen [209], Eigen [214].

The cosine of a square matrix A is defined in analogy with the matrix exponential.

$$\cos(A) = \frac{e^{iA} + e^{-iA}}{2}$$

$$\sin(A) = \frac{e^{iA} - e^{-iA}}{2i}$$

$$\cos^2(A) + \sin^2(A) = I$$

For real A, we can write $\cos(A) = \Re(e^{iA})$ and $\sin(A) = \Im(e^{iA})$.

$$\cosh(A) = \frac{e^{A} + e^{-A}}{2}$$

$$\sinh(A) = \frac{e^{A} - e^{-A}}{2}$$

Examples:

```
>>> from xlcalcnet import *
>>> mp.dps = 15; mp.pretty = True
>>> X = eye(3)
>>> cosm(X)
[0.54030230586814               0.0               0.0]
[            0.0  0.54030230586814               0.0]
[            0.0               0.0  0.54030230586814]
>>> X = hilbert(3)
>>> cosm(X)
[ 0.424403834569555  -0.316643413047167  -0.221474945949293]
[-0.316643413047167   0.820646708837824  -0.127183694770039]
[-0.221474945949293  -0.127183694770039   0.909236687217541]
>>> X = matrix([[1+j,-2],[0,-j]])
>>> cosm(X)
[(0.833730025131149 - 0.988897705762865j)  (1.07485840848393 - 0.17192140544213j)]
[                                     0.0               (1.54308063481524 + 0.0j)]
```

6.12.3 Matrix Cosine

`ctx.mat_cosm(matA)`

Calculates the cosine function of the matrix.

Writing `matA.CosMat()` has the same effect

See also: Wikipedia [1414], Wikipedia [1432].

See also: Eigen [209], Eigen [207].

The cosine of a square matrix A is defined in analogy with the matrix exponential.

$$\cos(A) = \frac{e^{iA} + e^{-iA}}{2}$$

$$\sin(A) = \frac{e^{iA} - e^{-iA}}{2i}$$

$$\cos^2(A) + \sin^2(A) = I$$

For real A, we can write $\cos(A) = \Re(e^{iA})$ and $\sin(A) = \Im(e^{iA})$.

$$\cosh(A) = \frac{e^{A} + e^{-A}}{2}$$

$$\sinh(A) = \frac{e^{A} - e^{-A}}{2}$$

Examples:

```
>>> from xlcalcnet import *
>>> mp.dps = 15; mp.pretty = True
>>> X = eye(3)
>>> cosm(X)
[0.54030230586814               0.0               0.0]
[            0.0  0.54030230586814               0.0]
[            0.0               0.0  0.54030230586814]
>>> X = hilbert(3)
>>> cosm(X)
[ 0.424403834569555  -0.316643413047167  -0.221474945949293]
[-0.316643413047167   0.820646708837824  -0.127183694770039]
[-0.221474945949293  -0.127183694770039   0.909236687217541]
>>> X = matrix([[1+j,-2],[0,-j]])
>>> cosm(X)
[(0.833730025131149 - 0.988897705762865j)  (1.07485840848393 - 0.17192140544213j)]
[                                     0.0               (1.54308063481524 + 0.0j)]
```

6.12.4 Matrix Hyperbolic Sine

`ctx.mat_sinhm(matA)`

Calculates the hyperbolic sine function of the matrix.

Writing `matA.SinhMat()` has the same effect

See also: Wikipedia [1414], Wikipedia [1432].

See also: Eigen [209], Eigen [211].

The hyperbolic sine of a square matrix A is defined in analogy with the matrix exponential.

$$\sinh(A) = \frac{e^A - e^{-A}}{2}$$

$$\cosh(A) = \frac{e^A + e^{-A}}{2}$$

$$\cosh^2(A) + \sinh^2(A) = I$$

```
Sub DemoCplxMatrixFunctions()
    Console.WriteLine("Hello CplxMatrixFunctions!")
    Dim digits = 15
    Dim n As Int32 = 4
    Dim A, B, C, D, E, F As New cplx_mat_t
    A.RandomSymmetric(n)
    A.Print("A: ")

    B = A.SinhMat()
    B.Print("B = Sinh(A): ")
    C = A.CoshMat()
    C.Print("C = Cosh(A): ")
    D = C * C - B * B
    D.Print("C * C - B * B: ")
End Sub
```

```
Hello CplxMatrixFunctions!
A:
 0.254341-1.994995j,  1.110691+0.032289j, -0.311350-0.647176j,  0.547685-1.281594j;
 1.110691+0.032289j,  1.435774-1.303568j, -0.641133-0.284371j, -0.827662-0.328684j;
-0.311350-0.647176j, -0.641133-0.284371j, -0.217231+1.954100j, -0.776330-0.558306j;
 0.547685-1.281594j, -0.827662-0.328684j, -0.776330-0.558306j,  0.652181-1.335063j;


B = Sinh(A):
-0.344029-0.627502j,  0.956056-0.480516j, -0.134878-0.034162j, -0.590098+0.338244j;
 0.956056-0.480516j,  1.739419-3.149695j, -0.793048-0.141610j, -1.597165+0.360539j;
-0.134878-0.034162j, -0.793048-0.141610j, -0.152880+1.211517j, -0.351965+0.026714j;
-0.590098+0.338244j, -1.597165+0.360539j, -0.351965+0.026714j,  0.171917-0.584919j;

C = Cosh(A):
-0.039723+0.009230j,  0.532073-1.170311j, -0.476465+0.181642j, -1.605643-0.168838j;
 0.532073-1.170311j,  2.022858-2.326341j, -0.294411-0.149198j, -1.095355+1.019715j;
-0.476465+0.181642j, -0.294411-0.149198j, -0.216192+0.186437j,  0.187127+0.027892j;
-1.605643-0.168838j, -1.095355+1.019715j,  0.187127+0.027892j,  0.851060-0.052593j;

C * C - B * B:
 1.000000+0.000000j,  0.000000+0.000000j,  0.000000+0.000000j,  0.000000+0.000000j;
 0.000000+0.000000j,  1.000000+0.000000j,  0.000000+0.000000j,  0.000000+0.000000j;
 0.000000+0.000000j,  0.000000+0.000000j,  1.000000+0.000000j,  0.000000+0.000000j;
 0.000000+0.000000j,  0.000000+0.000000j,  0.000000+0.000000j,  1.000000+0.000000j;
```

6.12.5 Matrix Hyperbolic Cosine

`ctx.mat_coshm(matA)`

Calculates the hyperbolic cosine function of the matrix.

Writing `matA.CoshMat()` has the same effect

See also: Wikipedia [1414], Wikipedia [1432].

See also: Eigen [209], Eigen [210].

The hyperbolic cosine of a square matrix A is defined in analogy with the matrix exponential.

$$\cosh(A) = \frac{e^A + e^{-A}}{2}$$

$$\sinh(A) = \frac{e^A - e^{-A}}{2}$$

$$\cosh^2(A) + \sinh^2(A) = I$$

```
Sub DemoCplxMatrixFunctions()
    Console.WriteLine("Hello CplxMatrixFunctions!")
    Dim digits = 15
    Dim n As Int32 = 4
    Dim A, B, C, D, E, F As New cplx_mat_t
    A.RandomSymmetric(n)
    A.Print("A: ")
    B = A.ExpMat()
    B.Print("B = Exp(A): ")
    C = B.LogMat()
    C.Print("C = Log(B): ")

    D = B.SqrtMat()
    D.Print("D = Sqrt(B): ")
    E = D * D
    E.Print("E = D * D: ")

    B = A.SinMat()
    B.Print("B = Sin(A): ")
    C = A.CosMat()
    C.Print("C = Cos(A): ")
    D = B * B + C * C
    D.Print("B * B + C * C: ")

    B = A.SinhMat()
    B.Print("B = Sinh(A): ")
    C = A.CoshMat()
    C.Print("C = Cosh(A): ")
    D = C * C - B * B
    D.Print("C * C - B * B: ")
End Sub
```

```
Hello CplxMatrixFunctions!
A:
 0.254341-1.994995j,  1.110691+0.032289j, -0.311350-0.647176j,  0.547685-1.281594j;
 1.110691+0.032289j,  1.435774-1.303568j, -0.641133-0.284371j, -0.827662-0.328684j;
-0.311350-0.647176j, -0.641133-0.284371j, -0.217231+1.954100j, -0.776330-0.558306j;
 0.547685-1.281594j, -0.827662-0.328684j, -0.776330-0.558306j,  0.652181-1.335063j;

B = Exp(A):
-0.383752-0.618272j,  1.488129-1.650828j, -0.611343+0.147480j, -2.195741+0.169406j;
 1.488129-1.650828j,  3.762277-5.476036j, -1.087459-0.290808j, -2.692520+1.380254j;
-0.611343+0.147480j, -1.087459-0.290808j, -0.369072+1.397953j, -0.164837+0.054606j;
-2.195741+0.169406j, -2.692520+1.380254j, -0.164837+0.054606j,  1.022977-0.637512j;
```

(continues on next page)

(continued from previous page)

```
C = Log(B):
 0.254341-1.994995j,  1.110691+0.032289j, -0.311350-0.647176j,  0.547685-1.281594j;
 1.110691+0.032289j,  1.435774-1.303568j, -0.641133-0.284371j, -0.827662-0.328684j;
-0.311350-0.647176j, -0.641133-0.284371j, -0.217231+1.954100j, -0.776330-0.558306j;
 0.547685-1.281594j, -0.827662-0.328684j, -0.776330-0.558306j,  0.652181-1.335063j;

D = Sqrt(B):
 0.508620-0.931943j,  0.661969-0.319593j, -0.337003-0.172068j, -0.485698-0.655636j;
 0.661969-0.319593j,  2.077099-1.250104j, -0.401242-0.208424j, -0.746596+0.018077j;
-0.337003-0.172068j, -0.401242-0.208424j,  0.502520+0.963369j, -0.377613-0.193978j;
-0.485698-0.655636j, -0.746596+0.018077j, -0.377613-0.193978j,  1.013700-0.687531j;

E = D * D:
-0.383752-0.618272j,  1.488129-1.650828j, -0.611343+0.147480j, -2.195741+0.169406j;
 1.488129-1.650828j,  3.762277-5.476036j, -1.087459-0.290808j, -2.692520+1.380254j;
-0.611343+0.147480j, -1.087459-0.290808j, -0.369072+1.397953j, -0.164837+0.054606j;
-2.195741+0.169406j, -2.692520+1.380254j, -0.164837+0.054606j,  1.022977-0.637512j;

B = Sin(A):
 3.185996-4.423204j,  1.572018+0.576777j, -0.236161-2.007119j,  3.744383-3.392271j;
 1.572018+0.576777j,  0.829215-0.073722j, -0.452703-0.362702j,  0.213357-0.343298j;
-0.236161-2.007119j, -0.452703-0.362702j, -0.274184+2.749772j, -0.899405-1.828027j;
 3.744383-3.392271j,  0.213357-0.343298j, -0.899405-1.828027j,  3.157659-2.589512j;

C = Cos(A):
 4.524926+3.229556j, -0.735268+1.275592j,  1.749846+0.069384j,  3.245352+3.579443j;
-0.735268+1.275592j, -0.328697+0.628146j,  0.172580+0.683175j,  0.290239+0.309901j;
 1.749846+0.069384j,  0.172580+0.683175j,  3.469410-0.664084j,  0.996030+0.538410j;
 3.245352+3.579443j,  0.290239+0.309901j,  0.996030+0.538410j,  2.603737+2.713445j;

B * B + C * C:
 1.000000+0.000000j,  0.000000+0.000000j,  0.000000+0.000000j,  0.000000+0.000000j;
 0.000000+0.000000j,  1.000000+0.000000j,  0.000000+0.000000j,  0.000000+0.000000j;
 0.000000+0.000000j,  0.000000+0.000000j,  1.000000+0.000000j,  0.000000+0.000000j;
 0.000000+0.000000j,  0.000000+0.000000j,  0.000000+0.000000j,  1.000000+0.000000j;

B = Sinh(A):
-0.344029-0.627502j,  0.956056-0.480516j, -0.134878-0.034162j, -0.590098+0.338244j;
 0.956056-0.480516j,  1.739419-3.149695j, -0.793048-0.141610j, -1.597165+0.360539j;
-0.134878-0.034162j, -0.793048-0.141610j, -0.152880+1.211517j, -0.351965+0.026714j;
-0.590098+0.338244j, -1.597165+0.360539j, -0.351965+0.026714j,  0.171917-0.584919j;

C = Cosh(A):
-0.039723+0.009230j,  0.532073-1.170311j, -0.476465+0.181642j, -1.605643-0.168838j;
 0.532073-1.170311j,  2.022858-2.326341j, -0.294411-0.149198j, -1.095355+1.019715j;
-0.476465+0.181642j, -0.294411-0.149198j, -0.216192+0.186437j,  0.187127+0.027892j;
-1.605643-0.168838j, -1.095355+1.019715j,  0.187127+0.027892j,  0.851060-0.052593j;

C * C - B * B:
 1.000000+0.000000j,  0.000000+0.000000j,  0.000000+0.000000j,  0.000000+0.000000j;
 0.000000+0.000000j,  1.000000+0.000000j,  0.000000+0.000000j,  0.000000+0.000000j;
 0.000000+0.000000j,  0.000000+0.000000j,  1.000000+0.000000j,  0.000000+0.000000j;
 0.000000+0.000000j,  0.000000+0.000000j,  0.000000+0.000000j,  1.000000+0.000000j;
```

6.12.6 Matrix Square Root

`ctx.mat_sqrtm(matA)`

Computes a square root of the square matrix A, i.e. returns a matrix $B = A^{1/2}$ such that $B^2 = A$. The square root of a matrix, if it exists, is not unique.

Writing `matA.SqrtMat()` has the same effect

See also: Wikipedia [1414], Wikipedia [1431].

See also: Eigen [209], Eigen [215].

Examples

Square roots of some simple matrices:

```
>>> from xlcalcnet import *
>>> mp.dps = 15; mp.pretty = True
>>> sqrtm([[1,0], [0,1]])
[1.0  0.0]
[0.0  1.0]
>>> sqrtm([[0,0], [0,0]])
[0.0  0.0]
[0.0  0.0]
>>> sqrtm([[2,0],[0,1]])
[1.4142135623731  0.0]
[            0.0  1.0]
>>> sqrtm([[1,1],[1,0]])
[ (0.920442065259926 - 0.21728689675164j)  (0.568864481005783 + 0.351577584254143j)]
[(0.568864481005783 + 0.351577584254143j)  (0.351577584254143 - 0.568864481005783j)]
>>> sqrtm([[1,0],[0,1]])
[1.0  0.0]
[0.0  1.0]
>>> sqrtm([[-1,0],[0,1]])
[(0.0 - 1.0j)           0.0]
[         0.0  (1.0 + 0.0j)]
>>> sqrtm([[j,0],[0,j]])
[(0.707106781186547 + 0.707106781186547j)                                      0.0]
[                                     0.0  (0.707106781186547 + 0.707106781186547j)]
```

A square root of a rotation matrix, giving the corresponding half-angle rotation matrix:

```
>>> t1 = 0.75
>>> t2 = t1 * 0.5
>>> A1 = matrix([[cos(t1), -sin(t1)], [sin(t1), cos(t1)]])
>>> A2 = matrix([[cos(t2), -sin(t2)], [sin(t2), cos(t2)]])
>>> sqrtm(A1)
[0.930507621912314  -0.366272529086048]
[0.366272529086048   0.930507621912314]
>>> A2
[0.930507621912314  -0.366272529086048]
[0.366272529086048   0.930507621912314]
```

The identity $(A^2)^{1/2} = A$ does not necessarily hold:

```
>>> A = matrix([[4,1,4],[7,8,9],[10,2,11]])
>>> sqrtm(A**2)
[ 4.0  1.0   4.0]
[ 7.0  8.0   9.0]
[10.0  2.0  11.0]
>>> sqrtm(A)**2
[ 4.0  1.0   4.0]
[ 7.0  8.0   9.0]
[10.0  2.0  11.0]
>>> A = matrix([[-4,1,4],[7,-8,9],[10,2,11]])
```

(continues on next page)

(continued from previous page)

```
>>> sqrtm(A**2)
[  7.43715112194995  -0.324127569985474   1.8481718827526]
[-0.251549715716942    9.32699765900402  2.48221180985147]
[  4.11609388833616   0.775751877098258   13.017955697342]
>>> chop(sqrtm(A)**2)
[-4.0   1.0   4.0]
[ 7.0  -8.0   9.0]
[10.0   2.0  11.0]
```

For some matrices, a square root does not exist:

```
>>> sqrtm([[0,1], [0,0]])
Traceback (most recent call last):
    ...
ZeroDivisionError: matrix is numerically singular
```

Two examples from the documentation for Matlab's `sqrtm`:

```
>>> mp.dps = 15; mp.pretty = True
>>> sqrtm([[7,10],[15,22]])
[1.56669890360128  1.74077655955698]
[2.61116483933547  4.17786374293675]
>>>
>>> X = matrix(\
...   [[5,-4,1,0,0],
...   [-4,6,-4,1,0],
...   [1,-4,6,-4,1],
...   [0,1,-4,6,-4],
...   [0,0,1,-4,5]])
>>> Y = matrix(\
...   [[2,-1,-0,-0,-0],
...   [-1,2,-1,0,-0],
...   [0,-1,2,-1,0],
...   [-0,0,-1,2,-1],
...   [-0,-0,-0,-1,2]])
>>> mnorm(sqrtm(X) - Y)
4.53155328326114e-19
```

6.12.7 Matrix Logarithm

`ctx.mat_logm(`*matA*`)`

Calculates the logarithm of the matrix.

Writing `matA.LogMat()` has the same effect

See also: Wikipedia [1414], Wikipedia [1422].

See also: Eigen [209], Eigen [212].

Computes a logarithm of the square matrix A, i.e. returns a matrix $B = \log(A)$ such that $\exp(B) = A$. The logarithm of a matrix, if it exists, is not unique.

Examples

Logarithms of some simple matrices:

```
>>> from xlcalcnet import *
>>> mp.dps = 15; mp.pretty = True
>>> X = eye(3)
>>> logm(X)
[0.0  0.0  0.0]
[0.0  0.0  0.0]
[0.0  0.0  0.0]
>>> logm(2*X)
[0.693147180559945                0.0                0.0]
[              0.0  0.693147180559945                0.0]
[              0.0                0.0  0.693147180559945]
>>> logm(expm(X))
[1.0  0.0  0.0]
[0.0  1.0  0.0]
[0.0  0.0  1.0]
```

A logarithm of a complex matrix:

```
>>> X = matrix([[2+j, 1, 3], [1-j, 1-2*j, 1], [-4, -5, j]])
>>> B = logm(X)
>>> nprint(B)
[ (0.808757 + 0.107759j)    (2.20752 + 0.202762j)   (1.07376 - 0.773874j)]
[ (0.905709 - 0.107795j)  (0.0287395 - 0.824993j)  (0.111619 + 0.514272j)]
[(-0.930151 + 0.399512j)   (-2.06266 - 0.674397j)  (0.791552 + 0.519839j)]
>>> chop(expm(B))
[(2.0 + 1.0j)           1.0           3.0]
[(1.0 - 1.0j)  (1.0 - 2.0j)           1.0]
[        -4.0          -5.0  (0.0 + 1.0j)]
```

A matrix X close to the identity matrix, for which $\log(\exp(X)) = \exp(\log(X)) = X$ holds:

```
>>> X = eye(3) + hilbert(3)/4
>>> X
[              1.25             0.125  0.0833333333333333]
[             0.125  1.08333333333333             0.0625]
[0.0833333333333333            0.0625               1.05]
>>> logm(expm(X))
[              1.25             0.125  0.0833333333333333]
[             0.125  1.08333333333333             0.0625]
[0.0833333333333333            0.0625               1.05]
>>> expm(logm(X))
[              1.25             0.125  0.0833333333333333]
[             0.125  1.08333333333333             0.0625]
[0.0833333333333333            0.0625               1.05]
```

A logarithm of a rotation matrix, giving back the angle of the rotation:

```
>>> t = 3.7
>>> A = matrix([[cos(t),sin(t)],[-sin(t),cos(t)]])
>>> chop(logm(A))
[             0.0  -2.58318530717959]
[2.58318530717959                0.0]
>>> (2*pi-t)
2.58318530717959
```

For some matrices, a logarithm does not exist:

```
>>> logm([[1,0], [0,0]])
Traceback (most recent call last):
    ...
ZeroDivisionError: matrix is numerically singular
```

Logarithm of a matrix with large entries:

```
>>> logm(hilbert(3) * 10**20).apply(re)
[ 45.5597513593433  1.27721006042799  0.317662687717978]
[ 1.27721006042799  42.5222778973542   2.24003708791604]
[0.317662687717978  2.24003708791604    42.395212822267]
```

6.12.8 Matrix power

`ctx.mat_powm(`*matA*, *r*`)`

Computes $A^r = \exp(A \log r)$ for a matrix A and complex number r.

Writing `matA.PowMat(r)` has the same effect

See also: Wikipedia [1414], Wikipedia [1424], Wikipedia [1422].

See also: Eigen [209], Eigen [213].

Examples

Powers and inverse powers of a matrix:

```
>>> from xlcalcnet import *
>>> mp.dps = 15; mp.pretty = True
>>> A = matrix([[4,1,4],[7,8,9],[10,2,11]])
>>> powm(A, 2)
[ 63.0  20.0   69.0]
[174.0  89.0  199.0]
[164.0  48.0  179.0]
>>> chop(powm(powm(A, 4), 1/4.))
[ 4.0  1.0   4.0]
[ 7.0  8.0   9.0]
[10.0  2.0  11.0]
>>> powm(extraprec(20)(powm)(A, -4), -1/4.)
[ 4.0  1.0   4.0]
[ 7.0  8.0   9.0]
[10.0  2.0  11.0]
>>> chop(powm(powm(A, 1+0.5j), 1/(1+0.5j)))
[ 4.0  1.0   4.0]
[ 7.0  8.0   9.0]
[10.0  2.0  11.0]
>>> powm(extraprec(5)(powm)(A, -1.5), -1/(1.5))
[ 4.0  1.0   4.0]
[ 7.0  8.0   9.0]
[10.0  2.0  11.0]
```

A Fibonacci-generating matrix:

```
>>> powm([[1,1],[1,0]], 10)
[89.0  55.0]
[55.0  34.0]
>>> fib(10)
55.0
>>> powm([[1,1],[1,0]], 6.5)
[(16.5166626964253 - 0.0121089837381789j)  (10.2078589271083 + 0.0195927472575932j)]
[(10.2078589271083 + 0.0195927472575932j)  (6.30880376931698 - 0.0317017309957721j)]
>>> (phi**6.5 - (1-phi)**6.5)/sqrt(5)
(10.2078589271083 - 0.0195927472575932j)
>>> powm([[1,1],[1,0]], 6.2)
[ (14.3076953002666 - 0.008222855781077j)  (8.81733464837593 + 0.0133048601383712j)]
[(8.81733464837593 + 0.0133048601383712j)  (5.49036065189071 - 0.0215277159194482j)]
>>> (phi**6.2 - (1-phi)**6.2)/sqrt(5)
(8.81733464837593 - 0.0133048601383712j)
```

CHAPTER

SEVEN

NUMPY: USE WITH MULTIPRECISION DATA TYPES

7.1 Numpy array creation from shape or value

Slicing: https://stackoverflow.com/questions/509211/how-slicing-in-python-works

Note: Logic functions are not supported with multiprecision numbers as arguments

Note: input and output should use sqlite, xlread, enumerate

https://numpy.org/doc/stable/reference/generated/numpy.ufunc.html

https://numpy.org/doc/stable/reference/generated/numpy.where.html#numpy.where

https://numpy.org/doc/stable/reference/generated/numpy.choose.html#numpy.choose

https://numpy.org/doc/stable/reference/generated/numpy.select.html

Some text

https://numpy.org/doc/stable/glossary.html

https://numpy.org/doc/stable/reference/routines.array-creation.html

https://numpy.org/doc/stable/reference/maskedarray.baseclass.html#maskedarray-baseclass

https://numpy.org/doc/stable/reference/routines.ma.html

https://numpy.org/doc/stable/reference/arrays.ndarray.html#array-attributes

https://numpy.org/doc/stable/reference/arrays.ndarray.html#array-methods

7.1.1 Conversion from integer, float or complex array

npm.t(*ctx*, *matA*)

The following code prepares the example:

```
>>> from xlcalcnet import fpm, mpm, ipm, dpm, qpm, gpm, apm, npm, np
>>> ctx_all = [fpm, mpm, ipm, dpm, qpm, gpm, apm]
>>> np.set_printoptions(linewidth=200)
```

The following code creates a 3 x 3 array of type `int`, and then converts it into arrays of the multiprecision type `ctx` in `ctx_all`:

```
>>> matA = npm.array([[1,2,3], [4,5,6], [7,8,9]])
>>> for ctx in ctx_all: matB = npm.t(ctx, matA); print(ctx.name + ':\n', matB)
fpm:
 [[1.0 2.0 3.0]
 [4.0 5.0 6.0]
 [7.0 8.0 9.0]]
mpm:
 [[mpf('1.0') mpf('2.0') mpf('3.0')]
```

(continues on next page)

(continued from previous page)

```
 [mpf('4.0') mpf('5.0') mpf('6.0')]
 [mpf('7.0') mpf('8.0') mpf('9.0')]]
ipm:
 [[mpi('1.0', '1.0') mpi('2.0', '2.0') mpi('3.0', '3.0')]
 [mpi('4.0', '4.0') mpi('5.0', '5.0') mpi('6.0', '6.0')]
 [mpi('7.0', '7.0') mpi('8.0', '8.0') mpi('9.0', '9.0')]]
dpm:
 [[Decimal('1') Decimal('2') Decimal('3')]
 [Decimal('4') Decimal('5') Decimal('6')]
 [Decimal('7') Decimal('8') Decimal('9')]]
qpm:
 [[Fraction(1, 1) Fraction(2, 1) Fraction(3, 1)]
 [Fraction(4, 1) Fraction(5, 1) Fraction(6, 1)]
 [Fraction(7, 1) Fraction(8, 1) Fraction(9, 1)]]
gpm:
 [[mpfr('1.0') mpfr('2.0') mpfr('3.0')]
 [mpfr('4.0') mpfr('5.0') mpfr('6.0')]
 [mpfr('7.0') mpfr('8.0') mpfr('9.0')]]
apm:
 [[1.00000000000000 2.00000000000000 3.00000000000000]
 [4.00000000000000 5.00000000000000 6.00000000000000]
 [7.00000000000000 8.00000000000000 9.00000000000000]]
```

The following code creates a 3 x 3 array of random numbers of type `float`, and then converts it into arrays of the multiprecision type `ctx` in `ctx_all`:

```
>>> matA = matA = np.random.rand(3, 3)
>>> for ctx in ctx_all: matB = npm.t(ctx, matA); print(ctx.name + ':\n', matB)
fpm:
 [[0.6744434515981312 0.666353085652467 0.8970294047839491]
 [0.7559940954369713 0.9865280985239889 0.028695855364054057]
 [0.4402755692990895 0.9833733214486032 0.8904861723663713]]
mpm:
 [[mpf('0.67444345159813124') mpf('0.66635308565246698') mpf('0.89702940478394911')]
 [mpf('0.75599409543697127') mpf('0.98652809852398893') mpf('0.028695855364054057')]
 [mpf('0.44027556929908951') mpf('0.98337332144860323') mpf('0.89048617236637129')]]
ipm:
 [[mpi('0.67444345159813113', '0.67444345159813124') mpi('0.66635308565246698', '0.66635308565246709') mpi('0.
↪89702940478394899', '0.8970294047839491')]
 [mpi('0.75599409543697127', '0.75599409543697138') mpi('0.98652809852398882', '0.98652809852398893') mpi('0.
↪028695855364054054', '0.028695855364054057')]
 [mpi('0.44027556929908945', '0.44027556929908951') mpi('0.98337332144860312', '0.98337332144860323') mpi('0.
↪89048617236637129', '0.8904861723663714')]]
dpm:
 [[Decimal('0.6744434515981312') Decimal('0.666353085652467') Decimal('0.8970294047839491')]
 [Decimal('0.7559940954369713') Decimal('0.9865280985239889') Decimal('0.028695855364054057')]
 [Decimal('0.4402755692990895') Decimal('0.9833733214486032') Decimal('0.8904861723663713')]]
qpm:
 [[Fraction(6586361832013, 9765625000000) Fraction(666353085652467, 1000000000000000) Fraction(8970294047839491,␣
↪10000000000000000)]
 [Fraction(7559940954369713, 10000000000000000) Fraction(9865280985239889, 10000000000000000)␣
↪Fraction(28695855364054057, 100000000000000000)]
 [Fraction(880551138598179, 2000000000000000) Fraction(614608325905377, 625000000000000) Fraction(8904861723663713,␣
↪10000000000000000)]]
gpm:
 [[mpfr('0.67444345159813124') mpfr('0.66635308565246698') mpfr('0.89702940478394911')]
 [mpfr('0.75599409543697127') mpfr('0.98652809852398893') mpfr('0.028695855364054057')]
 [mpfr('0.44027556929908951') mpfr('0.98337332144860323') mpfr('0.89048617236637129')]]
apm:
 [[[0.674443451598131 +/- 2.39e-16] [0.666353085652467 +/- 1.31e-16] [0.897029404783949 +/- 1.20e-16]]
 [[0.755994095436971 +/- 3.81e-16] [0.986528098523989 +/- 2.95e-16] [0.0286958553640541 +/- 5.00e-17]]
 [[0.440275569299089 +/- 5.09e-16] [0.983373321448603 +/- 2.33e-16] [0.890486172366371 +/- 3.98e-16]]]
```

The following code creates a 3 x 3 array of random numbers of type `complex`, and then converts it into arrays of the multiprecision type `ctx` in `ctx_all`:

```
>>> matA = np.random.rand(3, 3) + 1j * np.random.rand(3, 3)
>>> for ctx in ctx_all: matB = npm.t(ctx, matA); print(ctx.name + ':\n', matB)
fpm:
 [[(0.567473450482438+0.775861558716608j) (0.9943782344345623+0.32179023975050236j) (0.2756393413671573+0.
↪20943264624284674j)]
 [(0.6170089420540226+0.5969465058491088j) (0.694950179213084+0.60703126378221321) (0.13610785528289382+0.
↪90817196992087246j)]
 [(0.09188433151601583+0.26259046235301586j) (0.2551946534651285+0.9279289657328522j) (0.7147838697585964+0.
↪043110422866829756j)]]
mpm:
 [[mpc(real='0.56747345048243802', imag='0.775861558716608') mpc(real='0.9943782344345623', imag='0.32179023975050236
↪') mpc(real='0.27563934136715729', imag='0.20943264624284674')]
 [mpc(real='0.61700894205402257', imag='0.5969465058491088') mpc(real='0.694950179213084', imag='0.60703126378221317')␣
↪mpc(real='0.13610785528289382', imag='0.90817196992087246')]
 [mpc(real='0.091884331516015827', imag='0.26259046235301586') mpc(real='0.25519465346512848', imag='0.
↪92792896573285222') mpc(real='0.71478386975859642', imag='0.043110422866829756')]]
ipm:
 [[iv.mpc(mpi('0.56747345048243802', '0.56747345048243802'), mpi('0.775861558716608', '0.775861558716608'))
  iv.mpc(mpi('0.9943782344345623', '0.9943782344345623'), mpi('0.32179023975050236', '0.32179023975050236'))
  iv.mpc(mpi('0.27563934136715729', '0.27563934136715729'), mpi('0.20943264624284674', '0.20943264624284674'))]
 [iv.mpc(mpi('0.61700894205402257', '0.61700894205402257'), mpi('0.5969465058491088', '0.5969465058491088'))
  iv.mpc(mpi('0.694950179213084', '0.694950179213084'), mpi('0.60703126378221317', '0.60703126378221317'))
  iv.mpc(mpi('0.13610785528289382', '0.13610785528289382'), mpi('0.90817196992087246', '0.90817196992087246'))]
 [iv.mpc(mpi('0.091884331516015827', '0.091884331516015827'), mpi('0.26259046235301586', '0.26259046235301586'))
  iv.mpc(mpi('0.25519465346512848', '0.25519465346512848'), mpi('0.92792896573285222', '0.92792896573285222'))
  iv.mpc(mpi('0.71478386975859642', '0.71478386975859642'), mpi('0.043110422866829756', '0.043110422866829756'))]]
dpm:
 [[DecCplx('0.567473450482438 + 0.775861558716608j') DecCplx('0.9943782344345623 + 0.32179023975050236j') DecCplx('0.
↪2756393413671573 + 0.20943264624284674j')]
 [DecCplx('0.6170089420540226 + 0.5969465058491088j') DecCplx('0.694950179213084 + 0.60703126378221321') DecCplx('0.
↪13610785528289382 + 0.90817196992087251')]
 [DecCplx('0.09188433151601583 + 0.26259046235301586j') DecCplx('0.2551946534651285 + 0.9279289657328522j') DecCplx('0.
↪7147838697585964 + 0.043110422866829756j')]]
qpm:
 [[QCplx('283736725241219/5000000000000000 + 12122836854947/156250000000001') QCplx('9943782344345623/1000000000000000␣
↪+ 8044755993762559/25000000000000001')
  QCplx('2756393413671573/10000000000000000 + 10471632312142337/50000000000000001')]
 [QCplx('3085044710270113/5000000000000000 + 373091566155693/6250000000000001') QCplx('173737544803271/2500000000000000␣
↪+ 1517578159455533/25000000000000001')
  QCplx('6805392764144691/5000000000000000 + 363268787968349/4000000000000001')]
 [QCplx('9188433151601583/10000000000000000 + 13129523117650793/50000000000000001') QCplx('510389306930257/
↪2000000000000000 + 4639644828664261/5000000000000001')
  QCplx('1786959674396491/2500000000000000 + 10777605716707439/25000000000000001')]]
gpm:
 [[mpc('0.56747345048243802+0.775861558716608j') mpc('0.9943782344345623+0.32179023975050236j') mpc('0.
↪27563934136715729+0.20943264624284674j')]
 [mpc('0.61700894205402257+0.5969465058491088j') mpc('0.694950179213084+0.60703126378221317j') mpc('0.
↪13610785528289382+0.90817196992087246j')]
 [mpc('0.091884331516015827+0.26259046235301586j') mpc('0.25519465346512848+0.92792896573285222j') mpc('0.
↪71478386975859642+0.043110422866829756j')]]
apm:
 [[[0.567473450482438 +/- 2.44e-17] + [0.775861558716608 +/- 1.89e-18]j [0.994378234434562 +/- 3.03e-16] + [0.
↪321790239750502 +/- 3.61e-16]j
  [0.275639341367157 +/- 2.87e-16] + [0.209432646242847 +/- 2.58e-16]j]
 [[0.617008942054023 +/- 4.32e-16] + [0.596946505849109 +/- 2.01e-16]j [0.694950179213084 +/- 3.91e-18] + [0.
↪607031263782213 +/- 1.71e-16]j
  [0.136107855282894 +/- 1.81e-16] + [0.908171969920872 +/- 4.58e-16]j]
 [[0.0918843315160158 +/- 2.70e-17] + [0.262590462353016 +/- 1.37e-16]j [0.255194653465128 +/- 4.85e-16] + [0.
↪927928965732852 +/- 2.18e-16]j
  [0.714783869758596 +/- 4.25e-16] + [0.0431104228668298 +/- 4.38e-17]j]]
```

7.1.2 Ones on the diagonal and zeros elsewhere: numpy.eye

npm.**eye**(*N*, *M=None*, *k=0*, *dtype=<class 'float'>*, *order='C'*, ***, *device=None*, *like=None*)

Return a 2-D array with ones on the diagonal and zeros elsewhere.

See https://numpy.org/doc/stable/reference/generated/numpy.eye.html#numpy.eye for details.

The following code creates a 3 x (M=4) array with ones on the first upper (k=1) diagonal and zeros elsewhere, and then converts it into arrays of the multiprecision type `ctx` in `ctx_all`:

```
>>> from xlcalcnet import fpm, mpm, ipm, dpm, qpm, gpm, apm, npm, np
>>> ctx_all = [fpm, mpm, ipm, dpm, qpm, gpm, apm]
>>> for ctx in ctx_all: matB = npm.eye(N=3, M=4, k=1, dtype=ctx); print(ctx.name + ':\n', matB)
fpm:
 [[0.0 1.0 0.0 0.0]
 [0.0 0.0 1.0 0.0]
 [0.0 0.0 0.0 1.0]]
mpm:
 [[mpf('0.0') mpf('1.0') mpf('0.0') mpf('0.0')]
 [mpf('0.0') mpf('0.0') mpf('1.0') mpf('0.0')]
 [mpf('0.0') mpf('0.0') mpf('0.0') mpf('1.0')]]
ipm:
 [[mpi('0.0', '0.0') mpi('1.0', '1.0') mpi('0.0', '0.0') mpi('0.0', '0.0')]
 [mpi('0.0', '0.0') mpi('0.0', '0.0') mpi('1.0', '1.0') mpi('0.0', '0.0')]
 [mpi('0.0', '0.0') mpi('0.0', '0.0') mpi('0.0', '0.0') mpi('1.0', '1.0')]]
dpm:
 [[Decimal('0.0') Decimal('1.0') Decimal('0.0') Decimal('0.0')]
 [Decimal('0.0') Decimal('0.0') Decimal('1.0') Decimal('0.0')]
 [Decimal('0.0') Decimal('0.0') Decimal('0.0') Decimal('1.0')]]
qpm:
 [[Fraction(0, 1) Fraction(1, 1) Fraction(0, 1) Fraction(0, 1)]
 [Fraction(0, 1) Fraction(0, 1) Fraction(1, 1) Fraction(0, 1)]
 [Fraction(0, 1) Fraction(0, 1) Fraction(0, 1) Fraction(1, 1)]]
gpm:
 [[mpfr('0.0') mpfr('1.0') mpfr('0.0') mpfr('0.0')]
 [mpfr('0.0') mpfr('0.0') mpfr('1.0') mpfr('0.0')]
 [mpfr('0.0') mpfr('0.0') mpfr('0.0') mpfr('1.0')]]
apm:
 [[0 1.00000000000000 0 0]
 [0 0 1.00000000000000 0]
 [0 0 0 1.00000000000000]]
```

7.1.3 Identity array: numpy.identity

npm.**identity**(*n*, *dtype=None*, ** (Keyword-only parameters separator (PEP 3102))*, *like=None*)

Return the identity array. The identity array is a square array with ones on the main diagonal.

See https://numpy.org/doc/stable/reference/generated/numpy.identity.html#numpy.identity for details.

The following code creates a 3 x 3 identity array, and then converts it into arrays of the multiprecision type `ctx` in `ctx_all`:

```
>>> from xlcalcnet import fpm, mpm, ipm, dpm, qpm, gpm, apm, npm, np
>>> ctx_all = [fpm, mpm, ipm, dpm, qpm, gpm, apm]
>>> for ctx in ctx_all: matB = npm.identity(n=3, dtype=ctx); print(ctx.name + ':\n', matB)
fpm:
 [[1.0 0.0 0.0]
 [0.0 1.0 0.0]
 [0.0 0.0 1.0]]
mpm:
 [[mpf('1.0') mpf('0.0') mpf('0.0')]
 [mpf('0.0') mpf('1.0') mpf('0.0')]
 [mpf('0.0') mpf('0.0') mpf('1.0')]]
ipm:
 [[mpi('1.0', '1.0') mpi('0.0', '0.0') mpi('0.0', '0.0')]
```

(continues on next page)

(continued from previous page)

```
 [mpi('0.0', '0.0') mpi('1.0', '1.0') mpi('0.0', '0.0')]
 [mpi('0.0', '0.0') mpi('0.0', '0.0') mpi('1.0', '1.0')]]
dpm:
 [[Decimal('1.0') Decimal('0.0') Decimal('0.0')]
 [Decimal('0.0') Decimal('1.0') Decimal('0.0')]
 [Decimal('0.0') Decimal('0.0') Decimal('1.0')]]
qpm:
 [[Fraction(1, 1) Fraction(0, 1) Fraction(0, 1)]
 [Fraction(0, 1) Fraction(1, 1) Fraction(0, 1)]
 [Fraction(0, 1) Fraction(0, 1) Fraction(1, 1)]]
gpm:
 [[mpfr('1.0') mpfr('0.0') mpfr('0.0')]
 [mpfr('0.0') mpfr('1.0') mpfr('0.0')]
 [mpfr('0.0') mpfr('0.0') mpfr('1.0')]]
apm:
 [[1.00000000000000 0 0]
 [0 1.00000000000000 0]
 [0 0 1.00000000000000]]
```

7.1.4 Array of ones: numpy.ones

npm.**ones**(*shape*, *dtype=None*, *order='C'*, ***, *device=None*, *like=None*)

Return a new array of given shape and type, filled with ones.

See https://numpy.org/doc/stable/reference/generated/numpy.ones.html#numpy.ones for details.

The following code creates a 1 x 3 array of ones, and then converts it into arrays of the multiprecision type `ctx` in `ctx_all`:

```
>>> from xlcalcnet import fpm, mpm, ipm, dpm, qpm, gpm, apm, npm, np
>>> ctx_all = [fpm, mpm, ipm, dpm, qpm, gpm, apm]
>>> for ctx in ctx_all: matB = npm.ones(shape=(3,), dtype=ctx); print(ctx.name + ':\n', matB)
fpm:
 [1.0 1.0 1.0]
mpm:
 [mpf('1.0') mpf('1.0') mpf('1.0')]
ipm:
 [mpi('1.0', '1.0') mpi('1.0', '1.0') mpi('1.0', '1.0')]
dpm:
 [Decimal('1') Decimal('1') Decimal('1')]
qpm:
 [Fraction(1, 1) Fraction(1, 1) Fraction(1, 1)]
gpm:
 [mpfr('1.0') mpfr('1.0') mpfr('1.0')]
apm:
 [1.00000000000000 1.00000000000000 1.00000000000000]
```

7.1.5 Array of ones: numpy.ones_like

npm.**ones_like**(*a*, *dtype=None*, *order='K'*, *subok=True*, *shape=None*, ***, *device=None*)

Return an array of ones with the same shape and type as a given array.

See https://numpy.org/doc/stable/reference/generated/numpy.ones_like.html#numpy.ones_like for details.

The following code creates a 2 x 3 array of ones, based on another ndarray, and then converts it into arrays of the multiprecision type `ctx` in `ctx_all`:

```
>>> from xlcalcnet import fpm, mpm, ipm, dpm, qpm, gpm, apm, npm, np
>>> ctx_all = [fpm, mpm, ipm, dpm, qpm, gpm, apm]
>>> x = np.arange(6); x = x.reshape((2, 3))
>>> for ctx in ctx_all: matB = npm.ones_like(x, dtype=ctx); print(ctx.name + ':\n', matB)
fpm:
```

(continues on next page)

(continued from previous page)

```
 [[1.0 1.0 1.0]
 [1.0 1.0 1.0]]
mpm:
 [[mpf('1.0') mpf('1.0') mpf('1.0')]
 [mpf('1.0') mpf('1.0') mpf('1.0')]]
ipm:
 [[mpi('1.0', '1.0') mpi('1.0', '1.0') mpi('1.0', '1.0')]
 [mpi('1.0', '1.0') mpi('1.0', '1.0') mpi('1.0', '1.0')]]
dpm:
 [[Decimal('1') Decimal('1') Decimal('1')]
 [Decimal('1') Decimal('1') Decimal('1')]]
qpm:
 [[Fraction(1, 1) Fraction(1, 1) Fraction(1, 1)]
 [Fraction(1, 1) Fraction(1, 1) Fraction(1, 1)]]
gpm:
 [[mpfr('1.0') mpfr('1.0') mpfr('1.0')]
 [mpfr('1.0') mpfr('1.0') mpfr('1.0')]]
apm:
 [[1.00000000000000 1.00000000000000 1.00000000000000]
 [1.00000000000000 1.00000000000000 1.00000000000000]]
```

7.1.6 Array of zeros: numpy.zeros

npm.**zeros**(*shape*, *dtype=None*, *order='C'*, ***, *device=None*, *like=None*)

Return a new array of given shape and type, filled with zeros.

See https://numpy.org/doc/stable/reference/generated/numpy.zeros.html#numpy.zeros for details.

The following code creates a 1 x 3 array of zeros, and then converts it into arrays of the multiprecision type `ctx` in `ctx_all`:

```
>>> from xlcalcnet import fpm, mpm, ipm, dpm, qpm, gpm, apm, npm, np
>>> ctx_all = [fpm, mpm, ipm, dpm, qpm, gpm, apm]
>>> for ctx in ctx_all: matB = npm.zeros(shape=(3,), dtype=ctx); print(ctx.name + ':\n', matB)
fpm:
 [1.0 1.0 1.0]
mpm:
 [mpf('1.0') mpf('1.0') mpf('1.0')]
ipm:
 [mpi('1.0', '1.0') mpi('1.0', '1.0') mpi('1.0', '1.0')]
dpm:
 [Decimal('1') Decimal('1') Decimal('1')]
qpm:
 [Fraction(1, 1) Fraction(1, 1) Fraction(1, 1)]
gpm:
 [mpfr('1.0') mpfr('1.0') mpfr('1.0')]
apm:
 [1.00000000000000 1.00000000000000 1.00000000000000]
```

7.1.7 Array of zeros: numpy.zeros_like

npm.**zeros_like**(*a*, *dtype=None*, *order='K'*, *subok=True*, *shape=None*, ***, *device=None*)

Return an array of zeros with the same shape and type as a given array.

See https://numpy.org/doc/stable/reference/generated/numpy.zeros_like.html#numpy.zeros_like for details.

The following code creates a 2 x 3 array of zeros, based on another ndarray, and then converts it into arrays of the multiprecision type `ctx` in `ctx_all`:

```
>>> from xlcalcnet import fpm, mpm, ipm, dpm, qpm, gpm, apm, npm, np
>>> ctx_all = [fpm, mpm, ipm, dpm, qpm, gpm, apm]
>>> x = np.arange(6); x = x.reshape((2, 3))
```

(continues on next page)

(continued from previous page)

```
>>> for ctx in ctx_all: matB = npm.zeros_like(x, dtype=ctx); print(ctx.name + ':\n', matB)
fpm:
 [[0.0 0.0 0.0]
 [0.0 0.0 0.0]]
mpm:
 [[mpf('0.0') mpf('0.0') mpf('0.0')]
 [mpf('0.0') mpf('0.0') mpf('0.0')]]
ipm:
 [[mpi('0.0', '0.0') mpi('0.0', '0.0') mpi('0.0', '0.0')]
 [mpi('0.0', '0.0') mpi('0.0', '0.0') mpi('0.0', '0.0')]]
dpm:
 [[Decimal('0') Decimal('0') Decimal('0')]
 [Decimal('0') Decimal('0') Decimal('0')]]
qpm:
 [[Fraction(0, 1) Fraction(0, 1) Fraction(0, 1)]
 [Fraction(0, 1) Fraction(0, 1) Fraction(0, 1)]]
gpm:
 [[mpfr('0.0') mpfr('0.0') mpfr('0.0')]
 [mpfr('0.0') mpfr('0.0') mpfr('0.0')]]
apm:
 [[0 0 0]
 [0 0 0]]
```

7.1.8 Array of constant: numpy.full

npm.full(*shape*, *fill_value*, *dtype=None*, *order='C'*, ***, *device=None*, *like=None*)

Return a new array of given shape and type, filled with fill_value.

See https://numpy.org/doc/stable/reference/generated/numpy.full.html#numpy.full for details.

The following code creates a 2 x 2 array of tens, using the multiprecision type `ctx` in `ctx_all`:

```
>>> from xlcalcnet import fpm, mpm, ipm, dpm, qpm, gpm, apm, npm, np
>>> ctx_all = [fpm, mpm, ipm, dpm, qpm, gpm, apm]
>>> for ctx in ctx_all: matB = npm.full(shape=(2,2), fill_value=ctx.t(10)); print(ctx.name + ':\n', matB)
fpm:
 [[10. 10.]
 [10. 10.]]
mpm:
 [[mpf('10.0') mpf('10.0')]
 [mpf('10.0') mpf('10.0')]]
ipm:
 [[mpi('10.0', '10.0') mpi('10.0', '10.0')]
 [mpi('10.0', '10.0') mpi('10.0', '10.0')]]
dpm:
 [[Decimal('10') Decimal('10')]
 [Decimal('10') Decimal('10')]]
qpm:
 [[Fraction(10, 1) Fraction(10, 1)]
 [Fraction(10, 1) Fraction(10, 1)]]
gpm:
 [[mpfr('10.0') mpfr('10.0')]
 [mpfr('10.0') mpfr('10.0')]]
apm:
 [[10.000000000000000 10.000000000000000]
 [10.000000000000000 10.000000000000000]]
```

The following code creates a 2 x 2 array of +`inf`, using the multiprecision type `ctx` in `ctx_all`. Note that `qpm` is excluded, sine it does not support `inf`:

```
>>> from xlcalcnet import fpm, mpm, ipm, dpm, qpm, gpm, apm, npm, np
>>> ctx_fp = [fpm, mpm, ipm, dpm, gpm, apm]
>>> for ctx in ctx_fp: matB = npm.full(shape=(2,2), fill_value=ctx.inf); print(ctx.name + ':\n', matB)
```

(continues on next page)

(continued from previous page)

```
fpm:
 [[inf inf]
 [inf inf]]
mpm:
 [[mpf('+inf') mpf('+inf')]
 [mpf('+inf') mpf('+inf')]]
ipm:
 [[mpi('+inf', '+inf') mpi('+inf', '+inf')]
 [mpi('+inf', '+inf') mpi('+inf', '+inf')]]
dpm:
 [[Decimal('Infinity') Decimal('Infinity')]
 [Decimal('Infinity') Decimal('Infinity')]]
gpm:
 [[mpfr('inf') mpfr('inf')]
 [mpfr('inf') mpfr('inf')]]
apm:
 [[[+/- inf] [+/- inf]]
 [[+/- inf] [+/- inf]]]
```

The following code creates a 2 x 2 array of `nan`, using the multiprecision type `ctx` in `ctx_all`. Note that `qpm` is excluded, sine it does not support `nan`:

```
>>> from xlcalcnet import fpm, mpm, ipm, dpm, qpm, gpm, apm, npm, np
>>> ctx_fp = [fpm, mpm, ipm, dpm, gpm, apm]
>>> for ctx in ctx_fp: matB = npm.full(shape=(2,2), fill_value=ctx.nan); print(ctx.name + ':\n', matB)
fpm:
 [[nan nan]
 [nan nan]]
mpm:
 [[mpf('nan') mpf('nan')]
 [mpf('nan') mpf('nan')]]
ipm:
 [[mpi('nan', 'nan') mpi('nan', 'nan')]
 [mpi('nan', 'nan') mpi('nan', 'nan')]]
dpm:
 [[Decimal('NaN') Decimal('NaN')]
 [Decimal('NaN') Decimal('NaN')]]
gpm:
 [[mpfr('nan') mpfr('nan')]
 [mpfr('nan') mpfr('nan')]]
apm:
 [[nan nan]
 [nan nan]]
```

7.1.9 Array of constant: numpy.full_like

npm.**full_like**(*a*, *fill_value*, *dtype=None*, *order='K'*, *subok=True*, *shape=None*, ***, *device=None*)

Return a full array with the same shape and type as a given array.

See https://numpy.org/doc/stable/reference/generated/numpy.full_like.html#numpy.full_like for details.

The following code creates a 2 x 2 array of tens, using the multiprecision type `ctx` in `ctx_all`:

```
>>> from xlcalcnet import fpm, mpm, ipm, dpm, qpm, gpm, apm, npm, np
>>> ctx_all = [fpm, mpm, ipm, dpm, qpm, gpm, apm]
>>> x = np.arange(6); x = x.reshape((2, 3))
>>> for ctx in ctx_all: matB = npm.full_like(x, fill_value=10.0, dtype=ctx); print(ctx.name + ':\n', matB)
fpm:
 [[10.0 10.0 10.0]
 [10.0 10.0 10.0]]
mpm:
 [[mpf('10.0') mpf('10.0') mpf('10.0')]
 [mpf('10.0') mpf('10.0') mpf('10.0')]]
```

(continues on next page)

(continued from previous page)

```
ipm:
 [[mpi('10.0', '10.0') mpi('10.0', '10.0') mpi('10.0', '10.0')]
 [mpi('10.0', '10.0') mpi('10.0', '10.0') mpi('10.0', '10.0')]]
dpm:
 [[Decimal('10') Decimal('10') Decimal('10')]
 [Decimal('10') Decimal('10') Decimal('10')]]
qpm:
 [[Fraction(10, 1) Fraction(10, 1) Fraction(10, 1)]
 [Fraction(10, 1) Fraction(10, 1) Fraction(10, 1)]]
gpm:
 [[mpfr('10.0') mpfr('10.0') mpfr('10.0')]
 [mpfr('10.0') mpfr('10.0') mpfr('10.0')]]
apm:
 [[10.0000000000000 10.0000000000000 10.0000000000000]
 [10.0000000000000 10.0000000000000 10.0000000000000]]
```

7.1.10 Array with ones at and below the given diagonal and zeros elsewhere: numpy.tri

npm.tri(*N*, *M=None*, *k=0*, *dtype=<class 'float'>*, ***, *like=None*)

Create an array with ones at and below the given diagonal and zeros elsewhere.

See https://numpy.org/doc/stable/reference/generated/numpy.tri.html#numpy.tri for details

An array with ones at and below the given diagonal and zeros elsewhere.

```
>>> from xlcalcnet import fpm, mpm, ipm, dpm, qpm, gpm, apm, npm, np
>>> ctx_all = [fpm, mpm, ipm, dpm, qpm, gpm, apm]
>>> for ctx in ctx_all: x = npm.tri(N=3, M=5, k=-1, dtype=ctx); print(ctx.name + ':\n', x)
fpm:
 [[0.0 0.0 0.0 0.0 0.0]
 [1.0 0.0 0.0 0.0 0.0]
 [1.0 1.0 0.0 0.0 0.0]]
mpm:
 [[mpf('0.0') mpf('0.0') mpf('0.0') mpf('0.0') mpf('0.0')]
 [mpf('1.0') mpf('0.0') mpf('0.0') mpf('0.0') mpf('0.0')]
 [mpf('1.0') mpf('1.0') mpf('0.0') mpf('0.0') mpf('0.0')]]
ipm:
 [[mpi('0.0', '0.0') mpi('0.0', '0.0') mpi('0.0', '0.0') mpi('0.0', '0.0') mpi('0.0', '0.0')]
 [mpi('1.0', '1.0') mpi('0.0', '0.0') mpi('0.0', '0.0') mpi('0.0', '0.0') mpi('0.0', '0.0')]
 [mpi('1.0', '1.0') mpi('1.0', '1.0') mpi('0.0', '0.0') mpi('0.0', '0.0') mpi('0.0', '0.0')]]
dpm:
 [[Decimal('0.0') Decimal('0.0') Decimal('0.0') Decimal('0.0') Decimal('0.0')]
 [Decimal('1.0') Decimal('0.0') Decimal('0.0') Decimal('0.0') Decimal('0.0')]
 [Decimal('1.0') Decimal('1.0') Decimal('0.0') Decimal('0.0') Decimal('0.0')]]
qpm:
 [[Fraction(0, 1) Fraction(0, 1) Fraction(0, 1) Fraction(0, 1) Fraction(0, 1)]
 [Fraction(1, 1) Fraction(0, 1) Fraction(0, 1) Fraction(0, 1) Fraction(0, 1)]
 [Fraction(1, 1) Fraction(1, 1) Fraction(0, 1) Fraction(0, 1) Fraction(0, 1)]]
gpm:
 [[mpfr('0.0') mpfr('0.0') mpfr('0.0') mpfr('0.0') mpfr('0.0')]
 [mpfr('1.0') mpfr('0.0') mpfr('0.0') mpfr('0.0') mpfr('0.0')]
 [mpfr('1.0') mpfr('1.0') mpfr('0.0') mpfr('0.0') mpfr('0.0')]]
apm:
 [[0 0 0 0 0]
 [1.00000000000000 0 0 0 0]
 [1.00000000000000 1.00000000000000 0 0 0]]
```

7.2 Numpy array creation from existing data

7.2.1 Array from object: numpy.array

npm.**array**(*object*, *dtype=None*, ***, *copy=True*, *order='K'*, *subok=False*, *ndmin=0*, *like=None*)

Return an array from any object exposing the array interface, any object whose __array__ method returns an array, or any (nested) sequence. If object is a scalar, a 0-dimensional array containing object is returned.

The following code creates a 1-dimensional array from a 1-dimensionallist, using the multiprecision type `ctx` in `ctx_all`:

```
>>> from xlcalcnet import fpm, mpm, ipm, dpm, qpm, gpm, apm, npm, np
>>> ctx_all = [fpm, mpm, ipm, dpm, qpm, gpm, apm]
>>> for ctx in ctx_all: matB = npm.array([1, 2, 3], dtype=ctx); print(ctx.name + ':\n', matB)
fpm:
 [1.0 2.0 3.0]
mpm:
 [mpf('1.0') mpf('2.0') mpf('3.0')]
ipm:
 [mpi('1.0', '1.0') mpi('2.0', '2.0') mpi('3.0', '3.0')]
dpm:
 [Decimal('1') Decimal('2') Decimal('3')]
qpm:
 [Fraction(1, 1) Fraction(2, 1) Fraction(3, 1)]
gpm:
 [mpfr('1.0') mpfr('2.0') mpfr('3.0')]
apm:
 [1.00000000000000 2.00000000000000 3.00000000000000]
```

The following code creates a 2-dimensional array from a 2-dimensional list, using the multiprecision type `ctx` in `ctx_all`:

```
>>> from xlcalcnet import fpm, mpm, ipm, dpm, qpm, gpm, apm, npm, np
>>> ctx_all = [fpm, mpm, ipm, dpm, qpm, gpm, apm]
>>> for ctx in ctx_all: matB = npm.array([[1, 2], [3, 4]], dtype=ctx); print(ctx.name + ':\n', matB)
fpm:
 [[1.0 2.0]
 [3.0 4.0]]
mpm:
 [[mpf('1.0') mpf('2.0')]
 [mpf('3.0') mpf('4.0')]]
ipm:
 [[mpi('1.0', '1.0') mpi('2.0', '2.0')]
 [mpi('3.0', '3.0') mpi('4.0', '4.0')]]
dpm:
 [[Decimal('1') Decimal('2')]
 [Decimal('3') Decimal('4')]]
qpm:
 [[Fraction(1, 1) Fraction(2, 1)]
 [Fraction(3, 1) Fraction(4, 1)]]
gpm:
 [[mpfr('1.0') mpfr('2.0')]
 [mpfr('3.0') mpfr('4.0')]]
apm:
 [[1.00000000000000 2.00000000000000]
 [3.00000000000000 4.00000000000000]]
```

The following code creates a 2-dimensional array from a 1-dimensional list with the keyword `ndmin`=2, using the multiprecision type `ctx` in `ctx_all`:

```
>>> from xlcalcnet import fpm, mpm, ipm, dpm, qpm, gpm, apm, npm, np
>>> ctx_all = [fpm, mpm, ipm, dpm, qpm, gpm, apm]
>>> for ctx in ctx_all: matB = npm.array([1, 2, 3], dtype=ctx, ndmin=2); print(ctx.name + ':\n', matB)
fpm:
 [[1.0 2.0 3.0]]
mpm:
```

(continues on next page)

(continued from previous page)

```
 [[mpf('1.0') mpf('2.0') mpf('3.0')]]
ipm:
 [[mpi('1.0', '1.0') mpi('2.0', '2.0') mpi('3.0', '3.0')]]
dpm:
 [[Decimal('1') Decimal('2') Decimal('3')]]
qpm:
 [[Fraction(1, 1) Fraction(2, 1) Fraction(3, 1)]]
gpm:
 [[mpfr('1.0') mpfr('2.0') mpfr('3.0')]]
apm:
 [[1.00000000000000 2.00000000000000 3.00000000000000]]
```

The following code creates a 1-dimensional complex array from a 1-dimensional list of integers with the keyword `dtype=complex`, using the multiprecision type `ctx` in `ctx_all`:

```
>>> from xlcalcnet import fpm, mpm, ipm, dpm, qpm, gpm, apm, npm, np
>>> ctx_all = [fpm, mpm, ipm, dpm, qpm, gpm, apm]
>>> matA = np.array([1, 2, 3], dtype=complex)
>>> for ctx in ctx_all: matB = npm.t(ctx, matA); print(ctx.name + ':\n', matB)
fpm:
 [(1+0j) (2+0j) (3+0j)]
mpm:
 [mpc(real='1.0', imag='0.0') mpc(real='2.0', imag='0.0') mpc(real='3.0', imag='0.0')]
ipm:
 [iv.mpc(mpi('1.0', '1.0'), mpi('0.0', '0.0')) iv.mpc(mpi('2.0', '2.0'), mpi('0.0', '0.0')) iv.mpc(mpi('3.0', '3.0'),␣
 ↪mpi('0.0', '0.0'))]
dpm:
 [DecCplx('1.0 + 0.0j') DecCplx('2.0 + 0.0j') DecCplx('3.0 + 0.0j')]
qpm:
 [QCplx('1 + 0j') QCplx('2 + 0j') QCplx('3 + 0j')]
gpm:
 [mpc('1.0+0.0j') mpc('2.0+0.0j') mpc('3.0+0.0j')]
apm:
 [1.00000000000000 2.00000000000000 3.00000000000000]
```

7.2.2 Array from object: numpy.asarray

`npm.asarray`(*a*, *dtype=None*, *order=None*, ***, *device=None*, *copy=None*, *like=None*)

Return an array from input data in any form that can be converted to an array. This includes lists, lists of tuples, tuples, tuples of tuples, tuples of lists and ndarrays. Existing arrays are not copied. If dtype is set, array is copied only if dtype does not match. Contrary to asanyarray, ndarray subclasses are not passed through.

See https://numpy.org/doc/stable/reference/generated/numpy.asarray.html#numpy.asarray for details.

The following code creates a 2-dimensional array from a 2-dimensional list, using the multiprecision type `ctx` in `ctx_all`:

```
>>> from xlcalcnet import fpm, mpm, ipm, dpm, qpm, gpm, apm, npm, np
>>> ctx_all = [fpm, mpm, ipm, dpm, qpm, gpm, apm]
>>> matA = npm.asarray([[1, 2], [3, 4]])
>>> for ctx in ctx_all: matB = npm.t(ctx, matA); print(ctx.name + ':\n', matB)
fpm:
 [[1.0 2.0]
 [3.0 4.0]]
mpm:
 [[mpf('1.0') mpf('2.0')]
 [mpf('3.0') mpf('4.0')]]
ipm:
 [[mpi('1.0', '1.0') mpi('2.0', '2.0')]
 [mpi('3.0', '3.0') mpi('4.0', '4.0')]]
dpm:
 [[Decimal('1') Decimal('2')]
 [Decimal('3') Decimal('4')]]
```

(continues on next page)

(continued from previous page)

```
qpm:
 [[Fraction(1, 1) Fraction(2, 1)]
 [Fraction(3, 1) Fraction(4, 1)]]
gpm:
 [[mpfr('1.0') mpfr('2.0')]
 [mpfr('3.0') mpfr('4.0')]]
apm:
 [[1.00000000000000 2.00000000000000]
 [3.00000000000000 4.00000000000000]]

>>> # Existing arrays are not copied:
>>> a = npm.array([1, 2])
>>> np.asarray(a) is a
True

>>> # If dtype is set, array is copied only if dtype does not match:
>>> a = np.array([1, 2], dtype=np.float32)
>>> npm.asarray(a, dtype=np.float32) is a
True
>>> np.asarray(a, dtype=np.float64) is a
False

>>> # Contrary to asanyarray, ndarray subclasses are not passed through:
>>> issubclass(np.recarray, np.ndarray)
True
>>> a = np.array([(1.0, 2), (3.0, 4)], dtype='f4,i4').view(np.recarray)
>>> npm.asarray(a) is a
False
>>> np.asanyarray(a) is a
True
```

7.2.3 Array from object: numpy.asanyarray

npm.**asanyarray**(*a*, *dtype=None*, *order=None*, ***, *device=None*, *copy=None*, *like=None*)

Convert the input to an ndarray, but pass ndarray subclasses through. Return an array from input data in any form that can be converted to an array. This includes lists, lists of tuples, tuples, tuples of tuples, tuples of lists and ndarrays.

See https://numpy.org/doc/stable/reference/generated/numpy.asanyarray.html#numpy.asanyarray for details.

The following code creates a 2-dimensional array from a 2-dimensional list, using the multiprecision type `ctx` in `ctx_all`:

```
>>> from xlcalcnet import fpm, mpm, ipm, dpm, qpm, gpm, apm, npm, np
>>> ctx_all = [fpm, mpm, ipm, dpm, qpm, gpm, apm]
>>> matA = npm.asanyarray([[1, 2], [3, 4]])
>>> for ctx in ctx_all: matB = npm.t(ctx, matA); print(ctx.name + ':\n', matB)
fpm:
 [[1.0 2.0]
 [3.0 4.0]]
mpm:
 [[mpf('1.0') mpf('2.0')]
 [mpf('3.0') mpf('4.0')]]
ipm:
 [[mpi('1.0', '1.0') mpi('2.0', '2.0')]
 [mpi('3.0', '3.0') mpi('4.0', '4.0')]]
dpm:
 [[Decimal('1') Decimal('2')]
 [Decimal('3') Decimal('4')]]
qpm:
 [[Fraction(1, 1) Fraction(2, 1)]
 [Fraction(3, 1) Fraction(4, 1)]]
gpm:
 [[mpfr('1.0') mpfr('2.0')]
 [mpfr('3.0') mpfr('4.0')]]
```

(continues on next page)

(continued from previous page)

```
apm:
 [[1.00000000000000 2.00000000000000]
 [3.00000000000000 4.00000000000000]]

>>> # Contrary to asyarray, ndarray subclasses are passed through as-is:
>>> a = np.array([(1., 2), (3., 4)], dtype='f4,i4').view(np.recarray)
>>> np.asanyarray(a) is a
True
```

7.2.4 Array from data in a text or binary file: numpy.fromfile

npm.**fromfile**(*file*, *dtype=float*, *count=-1*, *sep=''*, *offset=0*, ***, *like=None*)

Construct an array from data in a text or binary file. A highly efficient way of reading binary data with a known data-type, as well as parsing simply formatted text files. Data written using the tofile method can be read using this function.

See https://numpy.org/doc/stable/reference/generated/numpy.fromfile.html#numpy.fromfile for details.

```
>>> import numpy as np; from xlcalcnet import mpm, dpm

>>> # Construct an ndarray:
>>> dt1 = np.dtype([('time', [('min', np.int64), ('sec', np.int64)]), ('temp', float)])
>>> x = np.zeros((1,), dtype=dt1)
>>> x['time']['min'] = 10; x['temp'] = 98.25
>>> x
array([((10, 0), 98.25)], dtype=[('time', [('min', '<i8'), ('sec', '<i8')]), ('temp', '<f8')])

>>> # Save the raw data to disk:
>>> import tempfile
>>> fname = tempfile.mkstemp()[1]
>>> x.tofile(fname)

>>> # Read the raw data from disk:
>>> np.fromfile(fname, dtype=dt1)
array([((10, 0), 98.25)], dtype=[('time', [('min', '<i8'), ('sec', '<i8')]), ('temp', '<f8')])

>>> # The recommended way to store and load data:
>>> np.save(fname, x)
>>> np.load(fname + '.npy')
array([((10, 0), 98.25)], dtype=[('time', [('min', '<i8'), ('sec', '<i8')]), ('temp', '<f8')])
```

7.2.5 Array from a function: numpy.fromfunction

npm.**fromfunction**(*function*, *shape*, ***, *dtype=<class 'float'>*, *like=None*, ***kwargs*)

Construct an array by executing a function over each coordinate. The resulting array therefore has a value `fn(x, y, z)` at coordinate `(x, y, z)`.

See https://numpy.org/doc/stable/reference/generated/numpy.fromfunction.html#numpy.fromfunction for details.

```
>>> import numpy as np; from xlcalcnet import mpm, dpm

>>> np.fromfunction(lambda i, j: i, (2, 2), dtype=float)
array([[0., 0.],
   [1., 1.]])

>>> np.fromfunction(lambda i, j: j, (2, 2), dtype=float)
array([[0., 1.],
       [0., 1.]])

>>> np.fromfunction(lambda i, j: i == j, (3, 3), dtype=int)
array([[ True, False, False],
       False,  True, False],
```

(continues on next page)

(continued from previous page)

```
       False, False,  True]])

>>> np.fromfunction(lambda i, j: i + j, (3, 3), dtype=int)
array([[0, 1, 2],
       [1, 2, 3],
       [2, 3, 4]])
```

7.2.6 Array from an iterable object: numpy.fromiter

npm.**fromiter**(*iter*, *dtype*, *count=-1*, ***, *like=None*)

Create a new 1-dimensional array from an iterable object.

See https://numpy.org/doc/stable/reference/generated/numpy.fromiter.html#numpy.fromiter for details.

```
>>> from xlcalcnet import fpm, mpm, ipm, dpm, qpm, gpm, apm, npm, np
>>> ctx_all = [fpm, mpm, ipm, dpm, qpm, gpm, apm]
>>> for ctx in ctx_all:
...     iterable = (ctx.square(x) for x in range(5))
...     x = npm.fromiter(iterable, object)
...     print(ctx.name + ':\n', x)
fpm:
 [0.0 1.0 4.0 9.0 16.0]
mpm:
 [mpf('0.0') mpf('1.0') mpf('4.0') mpf('9.0') mpf('16.0')]
ipm:
 [mpi('0.0', '0.0') mpi('1.0', '1.0') mpi('4.0', '4.0') mpi('9.0', '9.0') mpi('16.0', '16.0')]
dpm:
 [Decimal('0') Decimal('1') Decimal('4') Decimal('9') Decimal('16')]
qpm:
 [Fraction(0, 1) Fraction(1, 1) Fraction(4, 1) Fraction(9, 1) Fraction(16, 1)]
gpm:
 [mpfr('0.0') mpfr('1.0') mpfr('4.0') mpfr('9.0') mpfr('16.0')]
apm:
 [0 1.00000000000000 4.00000000000000 9.00000000000000 16.0000000000000]
```

A carefully constructed subarray dtype will lead to higher dimensional results:

```
>>> from xlcalcnet import fpm, mpm, ipm, dpm, qpm, gpm, apm, npm, np
>>> ctx_all = [fpm, mpm, ipm, dpm, qpm, gpm, apm]
>>> for ctx in ctx_all:
...     iterable = ((ctx.t(x), ctx.square(x)) for x in range(5))
...     x = npm.fromiter(iterable, dtype=np.dtype((object, 2)))
...     print(ctx.name + ':\n', x)
fpm:
 [[0.0 0.0]
 [1.0 1.0]
 [2.0 4.0]
 [3.0 9.0]
 [4.0 16.0]]
mpm:
 [[mpf('0.0') mpf('0.0')]
 [mpf('1.0') mpf('1.0')]
 [mpf('2.0') mpf('4.0')]
 [mpf('3.0') mpf('9.0')]
 [mpf('4.0') mpf('16.0')]]
ipm:
 [[mpi('0.0', '0.0') mpi('0.0', '0.0')]
 [mpi('1.0', '1.0') mpi('1.0', '1.0')]
 [mpi('2.0', '2.0') mpi('4.0', '4.0')]
 [mpi('3.0', '3.0') mpi('9.0', '9.0')]
 [mpi('4.0', '4.0') mpi('16.0', '16.0')]]
dpm:
 [[Decimal('0') Decimal('0')]
```

(continues on next page)

(continued from previous page)

```
 [Decimal('1') Decimal('1')]
 [Decimal('2') Decimal('4')]
 [Decimal('3') Decimal('9')]
 [Decimal('4') Decimal('16')]]
qpm:
 [[Fraction(0, 1) Fraction(0, 1)]
 [Fraction(1, 1) Fraction(1, 1)]
 [Fraction(2, 1) Fraction(4, 1)]
 [Fraction(3, 1) Fraction(9, 1)]
 [Fraction(4, 1) Fraction(16, 1)]]
gpm:
 [[mpfr('0.0') mpfr('0.0')]
 [mpfr('1.0') mpfr('1.0')]
 [mpfr('2.0') mpfr('4.0')]
 [mpfr('3.0') mpfr('9.0')]
 [mpfr('4.0') mpfr('16.0')]]
apm:
 [[0 0]
 [1.00000000000000 1.00000000000000]
 [2.00000000000000 4.00000000000000]
 [3.00000000000000 9.00000000000000]
 [4.00000000000000 16.00000000000000]]
```

7.2.7 Array from text data in a string: numpy.fromstring

npm.**fromstring**(*string*, *dtype=float*, *count=-1*, ***, *sep*, *like=None*)

Create a new 1-dimensional array initialized from text data in a string.

See https://numpy.org/doc/stable/reference/generated/numpy.fromstring.html#numpy.fromstring for details.

Real numbers:

```
>>> from xlcalcnet import fpm, mpm, ipm, dpm, qpm, gpm, apm, npm, np
>>> ctx_all = [fpm, mpm, ipm, dpm, qpm, gpm, apm]
>>> for ctx in ctx_all:
...     x = npm.fromstring('1.1, 2.1', dtype=float, sep=',')
...     matB = npm.t(ctx, x)
...     print(ctx.name + ':\n', matB)
fpm:
 [1.1 2.1]
mpm:
 [mpf('1.1000000000000001') mpf('2.1000000000000001')]
ipm:
 [mpi('1.0999999999999999', '1.1000000000000001') mpi('2.0999999999999996', '2.1000000000000001')]
dpm:
 [Decimal('1.1') Decimal('2.1')]
qpm:
 [Fraction(11, 10) Fraction(21, 10)]
gpm:
 [mpfr('1.1000000000000001') mpfr('2.1000000000000001')]
apm:
 [[1.10000000000000 +/- 3.56e-16] [2.10000000000000 +/- 8.00e-16]]
```

Complex numbers:

```
>>> from xlcalcnet import fpm, mpm, ipm, dpm, qpm, gpm, apm, npm, np
>>> ctx_all = [fpm, mpm, ipm, dpm, qpm, gpm, apm]
>>> for ctx in ctx_all:
...     x = npm.fromstring('1+3j, 2+4j', dtype=complex, sep=',')
...     matB = npm.t(ctx, x)
...     print(ctx.name + ':\n', matB)
fpm:
 [(1+3j) (2+4j)]
```

(continues on next page)

(continued from previous page)

```
mpm:
 [mpc(real='1.0', imag='3.0') mpc(real='2.0', imag='4.0')]
ipm:
 [iv.mpc(mpi('1.0', '1.0'), mpi('3.0', '3.0')) iv.mpc(mpi('2.0', '2.0'), mpi('4.0', '4.0'))]
dpm:
 [DecCplx('1.0 + 3.0j') DecCplx('2.0 + 4.0j')]
qpm:
 [QCplx('1 + 3j') QCplx('2 + 4j')]
gpm:
 [mpc('1.0+3.0j') mpc('2.0+4.0j')]
apm:
 [1.00000000000000 + 3.00000000000000j 2.00000000000000 + 4.00000000000000j]
```

7.2.8 Array from text data in a formatted file: numpy.loadtxt

npm.**loadtxt**(*fname*, *dtype=<class 'float'>*, *comments='#'*, *delimiter=None*, *converters=None*, *skiprows=0*, *usecols=None*, *unpack=False*, *ndmin=0*, *encoding=None*, *max_rows=None*, ***, *quotechar=None*, *like=None*)

Load data from a text file.

See https://numpy.org/doc/stable/reference/generated/numpy.loadtxt.html#numpy.loadtxt for details.

This function aims to be a fast reader for simply formatted files. The genfromtxt function provides more sophisticated handling of, e.g., lines with missing values.

Each row in the input text file must have the same number of values to be able to read all values. If all rows do not have same number of values, a subset of up to n columns (where n is the least number of values present in all rows) can be read by specifying the columns via usecols.

```
import os
import xlcalcnet.userpaths as userpaths
for ctx in ctx_all:
    to_ctx = npm.vectorize(ctx.t, otypes=[object])

    csvpath = os.sep.join([userpaths.get_my_documents(), \
        'DataXlCalcNet', 'DataExamples', 'MainExamples', 'CSV'])
    csvfile = 'Hald.csv'
    csvname = os.sep.join([csvpath, csvfile])

    with open(csvname) as f: header = f.readline().strip('\n')
    print('Header: ', header)

    nd_data = npm.loadtxt(csvname, dtype=np.float64, delimiter=',', \
    skiprows=1, usecols=(0,1,2,3,4))
    A = to_ctx(nd_data)
    N = len(A)
    print('N:', N)
    print('A: \n', A)
    print()

Header:  x1,x2,x3,x4,y
N: 13
A:
 [[7.0 26.0 6.0 60.0 78.5]
 [1.0 29.0 15.0 52.0 74.3]
 [11.0 56.0 8.0 20.0 104.3]
 [11.0 31.0 8.0 47.0 87.6]
 [7.0 52.0 6.0 33.0 95.9]
 [11.0 55.0 9.0 22.0 109.2]
 [3.0 71.0 17.0 6.0 102.7]
 [1.0 31.0 22.0 44.0 72.5]
 [2.0 54.0 18.0 22.0 93.1]
 [21.0 47.0 4.0 26.0 115.9]
 [1.0 40.0 23.0 34.0 83.8]
```

(continues on next page)

(continued from previous page)

```
 [11.0 66.0 9.0 12.0 113.3]
 [10.0 68.0 8.0 12.0 109.4]]

Header:  x1,x2,x3,x4,y
N: 13
A:
 [[mpf('7.0') mpf('26.0') mpf('6.0') mpf('60.0') mpf('78.5')]
 [mpf('1.0') mpf('29.0') mpf('15.0') mpf('52.0') mpf('74.299999999999997')]
 [mpf('11.0') mpf('56.0') mpf('8.0') mpf('20.0') mpf('104.3')]
 [mpf('11.0') mpf('31.0') mpf('8.0') mpf('47.0') mpf('87.599999999999994')]
 [mpf('7.0') mpf('52.0') mpf('6.0') mpf('33.0') mpf('95.900000000000006')]
 [mpf('11.0') mpf('55.0') mpf('9.0') mpf('22.0') mpf('109.2')]
 [mpf('3.0') mpf('71.0') mpf('17.0') mpf('6.0') mpf('102.7')]
 [mpf('1.0') mpf('31.0') mpf('22.0') mpf('44.0') mpf('72.5')]
 [mpf('2.0') mpf('54.0') mpf('18.0') mpf('22.0') mpf('93.099999999999994')]
 [mpf('21.0') mpf('47.0') mpf('4.0') mpf('26.0') mpf('115.90000000000001')]
 [mpf('1.0') mpf('40.0') mpf('23.0') mpf('34.0') mpf('83.799999999999997')]
 [mpf('11.0') mpf('66.0') mpf('9.0') mpf('12.0') mpf('113.3')]
 [mpf('10.0') mpf('68.0') mpf('8.0') mpf('12.0') mpf('109.40000000000001')]]

Header:  x1,x2,x3,x4,y
N: 13
A:
 [[mpi('7.0', '7.0') mpi('26.0', '26.0') mpi('6.0', '6.0') mpi('60.0', '60.0') mpi('78.5', '78.5')]
 [mpi('1.0', '1.0') mpi('29.0', '29.0') mpi('15.0', '15.0') mpi('52.0', '52.0') mpi('74.299999999999997', '74.
↪3000000000000011')]
 [mpi('11.0', '11.0') mpi('56.0', '56.0') mpi('8.0', '8.0') mpi('20.0', '20.0') mpi('104.3', '104.30000000000001')]
 [mpi('11.0', '11.0') mpi('31.0', '31.0') mpi('8.0', '8.0') mpi('47.0', '47.0') mpi('87.599999999999994', '87.
↪6000000000000009')]
 [mpi('7.0', '7.0') mpi('52.0', '52.0') mpi('6.0', '6.0') mpi('33.0', '33.0') mpi('95.899999999999991', '95.
↪9000000000000006')]
 [mpi('11.0', '11.0') mpi('55.0', '55.0') mpi('9.0', '9.0') mpi('22.0', '22.0') mpi('109.19999999999999', '109.2')]
 [mpi('3.0', '3.0') mpi('71.0', '71.0') mpi('17.0', '17.0') mpi('6.0', '6.0') mpi('102.69999999999999', '102.7')]
 [mpi('1.0', '1.0') mpi('31.0', '31.0') mpi('22.0', '22.0') mpi('44.0', '44.0') mpi('72.5', '72.5')]
 [mpi('2.0', '2.0') mpi('54.0', '54.0') mpi('18.0', '18.0') mpi('22.0', '22.0') mpi('93.099999999999994', '93.
↪1000000000000009')]
 [mpi('21.0', '21.0') mpi('47.0', '47.0') mpi('4.0', '4.0') mpi('26.0', '26.0') mpi('115.89999999999999', '115.
↪90000000000001')]
 [mpi('1.0', '1.0') mpi('40.0', '40.0') mpi('23.0', '23.0') mpi('34.0', '34.0') mpi('83.799999999999997', '83.
↪8000000000000011')]
 [mpi('11.0', '11.0') mpi('66.0', '66.0') mpi('9.0', '9.0') mpi('12.0', '12.0') mpi('113.3', '113.30000000000001')]
 [mpi('10.0', '10.0') mpi('68.0', '68.0') mpi('8.0', '8.0') mpi('12.0', '12.0') mpi('109.39999999999999', '109.
↪40000000000001')]]

Header:  x1,x2,x3,x4,y
N: 13
A:
 [[Decimal('7.0') Decimal('26.0') Decimal('6.0') Decimal('60.0') Decimal('78.5')]
 [Decimal('1.0') Decimal('29.0') Decimal('15.0') Decimal('52.0') Decimal('74.3')]
 [Decimal('11.0') Decimal('56.0') Decimal('8.0') Decimal('20.0') Decimal('104.3')]
 [Decimal('11.0') Decimal('31.0') Decimal('8.0') Decimal('47.0') Decimal('87.6')]
 [Decimal('7.0') Decimal('52.0') Decimal('6.0') Decimal('33.0') Decimal('95.9')]
 [Decimal('11.0') Decimal('55.0') Decimal('9.0') Decimal('22.0') Decimal('109.2')]
 [Decimal('3.0') Decimal('71.0') Decimal('17.0') Decimal('6.0') Decimal('102.7')]
 [Decimal('1.0') Decimal('31.0') Decimal('22.0') Decimal('44.0') Decimal('72.5')]
 [Decimal('2.0') Decimal('54.0') Decimal('18.0') Decimal('22.0') Decimal('93.1')]
 [Decimal('21.0') Decimal('47.0') Decimal('4.0') Decimal('26.0') Decimal('115.9')]
 [Decimal('1.0') Decimal('40.0') Decimal('23.0') Decimal('34.0') Decimal('83.8')]
 [Decimal('11.0') Decimal('66.0') Decimal('9.0') Decimal('12.0') Decimal('113.3')]
 [Decimal('10.0') Decimal('68.0') Decimal('8.0') Decimal('12.0') Decimal('109.4')]]

Header:  x1,x2,x3,x4,y
N: 13
A:
 [[Fraction(7, 1) Fraction(26, 1) Fraction(6, 1) Fraction(60, 1) Fraction(157, 2)]
 [Fraction(1, 1) Fraction(29, 1) Fraction(15, 1) Fraction(52, 1) Fraction(743, 10)]
```

(continues on next page)

(continued from previous page)

```
 [Fraction(11, 1) Fraction(56, 1) Fraction(8, 1) Fraction(20, 1) Fraction(1043, 10)]
 [Fraction(11, 1) Fraction(31, 1) Fraction(8, 1) Fraction(47, 1) Fraction(438, 5)]
 [Fraction(7, 1) Fraction(52, 1) Fraction(6, 1) Fraction(33, 1) Fraction(959, 10)]
 [Fraction(11, 1) Fraction(55, 1) Fraction(9, 1) Fraction(22, 1) Fraction(546, 5)]
 [Fraction(3, 1) Fraction(71, 1) Fraction(17, 1) Fraction(6, 1) Fraction(1027, 10)]
 [Fraction(1, 1) Fraction(31, 1) Fraction(22, 1) Fraction(44, 1) Fraction(145, 2)]
 [Fraction(2, 1) Fraction(54, 1) Fraction(18, 1) Fraction(22, 1) Fraction(931, 10)]
 [Fraction(21, 1) Fraction(47, 1) Fraction(4, 1) Fraction(26, 1) Fraction(1159, 10)]
 [Fraction(1, 1) Fraction(40, 1) Fraction(23, 1) Fraction(34, 1) Fraction(419, 5)]
 [Fraction(11, 1) Fraction(66, 1) Fraction(9, 1) Fraction(12, 1) Fraction(1133, 10)]
 [Fraction(10, 1) Fraction(68, 1) Fraction(8, 1) Fraction(12, 1) Fraction(547, 5)]]

Header:  x1,x2,x3,x4,y
N: 13
A:
 [[mpfr('7.0') mpfr('26.0') mpfr('6.0') mpfr('60.0') mpfr('78.5')]
 [mpfr('1.0') mpfr('29.0') mpfr('15.0') mpfr('52.0') mpfr('74.299999999999997')]
 [mpfr('11.0') mpfr('56.0') mpfr('8.0') mpfr('20.0') mpfr('104.3')]
 [mpfr('11.0') mpfr('31.0') mpfr('8.0') mpfr('47.0') mpfr('87.599999999999994')]
 [mpfr('7.0') mpfr('52.0') mpfr('6.0') mpfr('33.0') mpfr('95.900000000000006')]
 [mpfr('11.0') mpfr('55.0') mpfr('9.0') mpfr('22.0') mpfr('109.2')]
 [mpfr('3.0') mpfr('71.0') mpfr('17.0') mpfr('6.0') mpfr('102.7')]
 [mpfr('1.0') mpfr('31.0') mpfr('22.0') mpfr('44.0') mpfr('72.5')]
 [mpfr('2.0') mpfr('54.0') mpfr('18.0') mpfr('22.0') mpfr('93.099999999999994')]
 [mpfr('21.0') mpfr('47.0') mpfr('4.0') mpfr('26.0') mpfr('115.90000000000001')]
 [mpfr('1.0') mpfr('40.0') mpfr('23.0') mpfr('34.0') mpfr('83.799999999999997')]
 [mpfr('11.0') mpfr('66.0') mpfr('9.0') mpfr('12.0') mpfr('113.3')]
 [mpfr('10.0') mpfr('68.0') mpfr('8.0') mpfr('12.0') mpfr('109.40000000000001')]]

Header:  x1,x2,x3,x4,y
N: 13
A:
 [[7.00000000000000 26.0000000000000 6.00000000000000 60.0000000000000 78.5000000000000]
 [1.00000000000000 29.0000000000000 15.0000000000000 52.0000000000000 [74.3000000000000 +/- 1.71e-14]]
 [11.0000000000000 56.0000000000000 8.00000000000000 20.0000000000000 [104.300000000000 +/- 1.71e-14]]
 [11.0000000000000 31.0000000000000 8.00000000000000 47.0000000000000 [87.6000000000000 +/- 2.00e-14]]
 [7.00000000000000 52.0000000000000 6.00000000000000 33.0000000000000 [95.9000000000000 +/- 2.28e-14]]
 [11.0000000000000 55.0000000000000 9.00000000000000 22.0000000000000 [109.200000000000 +/- 2.56e-14]]
 [3.00000000000000 71.0000000000000 17.0000000000000 6.00000000000000 [102.700000000000 +/- 2.56e-14]]
 [1.00000000000000 31.0000000000000 22.0000000000000 44.0000000000000 72.5000000000000]
 [2.00000000000000 54.0000000000000 18.0000000000000 22.0000000000000 [93.1000000000000 +/- 2.00e-14]]
 [21.0000000000000 47.0000000000000 4.00000000000000 26.0000000000000 [115.900000000000 +/- 2.28e-14]]
 [1.00000000000000 40.0000000000000 23.0000000000000 34.0000000000000 [83.8000000000000 +/- 1.71e-14]]
 [11.0000000000000 66.0000000000000 9.00000000000000 12.0000000000000 [113.300000000000 +/- 1.71e-14]]
 [10.0000000000000 68.0000000000000 8.00000000000000 12.0000000000000 [109.400000000000 +/- 2.28e-14]]]
```

7.2.9 Array from text data in a text file (can handle missing values): numpy.genfromtxt

npm.**genfromtxt**(*fname*, *dtype=<class 'float'>*, *comments='#'*, *delimiter=None*, *skip_header=0*, *skip_footer=0*, *converters=None*, *missing_values=None*, *filling_values=None*, *usecols=None*, *names=None*, *excludelist=None*, *deletechars=" !#$%&'()*+, -./:;<=>?@[\\]^{|}~"*, *replace_space='_'*, *autostrip=False*, *case_sensitive=True*, *defaultfmt='f%i'*, *unpack=None*, *usemask=False*, *loose=True*, *invalid_raise=True*, *max_rows=None*, *encoding=None*, ***, *ndmin=0*, *like=None*)

Load data from a text file, with missing values handled as specified.

Each line past the first skip_header lines is split at the delimiter character, and characters following the comments character are discarded.

See https://numpy.org/doc/stable/reference/generated/numpy.genfromtxt.html#numpy.genfromtxt for details.

When spaces are used as delimiters, or when no delimiter has been given as input, there should not be any missing data between two fields.

When variables are named (either by a flexible dtype or with a names sequence), there must not be any header in the file (else a ValueError exception is raised).

Individual values are not stripped of spaces by default. When using a custom converter, make sure the function does remove spaces.

```
import os
import xlcalcnet.userpaths as userpaths
for ctx in ctx_all:
    to_ctx = npm.vectorize(ctx.t, otypes=[object])

    csvpath = os.sep.join([userpaths.get_my_documents(), \
        'DataXlCalcNet', 'DataExamples', 'MainExamples', 'CSV'])
    csvfile = 'Hald.csv'
    csvname = os.sep.join([csvpath, csvfile])

    with open(csvname) as f: header = f.readline().strip('\n')
    print('Header: ', header)

    nd_data = npm.genfromtxt(csvname, dtype=np.float64, delimiter=',', \
    skip_header=1, usecols=(0,1,2,3,4))
    A = to_ctx(nd_data)
    N = len(A)
    print('N:', N)
    print('A: \n', A)
    print()
```

The output is the same as for the `loadtxt` example shown above and is not repeated here.

7.3 Building special arrays for numerical work

7.3.1 Evenly spaced values within a given interval: numpy.arange

npm.**arange**([*start*,]*stop*, [*step*,]*dtype=None*, *, *device=None*, *like=None*)

Return evenly spaced values within a given interval.

See https://numpy.org/doc/stable/reference/generated/numpy.arange.html#numpy.arange for details.

See also: https://numpy.org/doc/stable/user/how-to-partition.html#how-to-partition

For integer arguments the function is roughly equivalent to the Python built-in range, but returns an ndarray rather than a range instance.

When using a non-integer step, such as 0.1, it is often better to use numpy.linspace. The length of the output might not be numerically stable.

Another stability issue is due to the internal implementation of numpy.arange. The actual step value used to populate the array is dtype(start + step) - dtype(start) and not step. Precision loss can occur here, due to casting or due to using floating points when start is much larger than step. This can lead to unexpected behaviour. For example:

```
>>> from xlcalcnet import fpm, mpm, ipm, dpm, qpm, gpm, apm, npm, np
>>> ctx_all = [fpm, mpm, ipm, dpm, qpm, gpm, apm]

>>> # arange with 1 argument:
>>> for ctx in ctx_all: print(npm.arange(4, dtype=ctx))
[0. 1. 2. 3.]
[mpf('0.0') mpf('1.0') mpf('2.0') mpf('3.0')]
[mpi('0.0', '0.0') mpi('1.0', '1.0') mpi('2.0', '2.0') mpi('3.0', '3.0')]
[Decimal('0') Decimal('1') Decimal('2') Decimal('3')]
[Fraction(0, 1) Fraction(1, 1) Fraction(2, 1) Fraction(3, 1)]
[mpfr('0.0') mpfr('1.0') mpfr('2.0') mpfr('3.0')]
[0 1.00000000000000 2.00000000000000 3.00000000000000]

>>> # arange with 2 arguments:
>>> for ctx in ctx_all: print(npm.arange(0.3, 4, dtype=ctx))
[0.3 1.3 2.3 3.3]
[mpf('0.29999999999999999') mpf('1.3') mpf('2.2999999999999998') mpf('3.2999999999999998')]
[mpi('0.29999999999999999', '0.30000000000000004') mpi('1.2999999999999998', '1.3') mpi('2.2999999999999994', '2.
↪3000000000000007') mpi('3.2999999999999989', '3.3000000000000012')]
[Decimal('0.3') Decimal('1.3') Decimal('2.3') Decimal('3.3')]
[Fraction(3, 10) Fraction(13, 10) Fraction(23, 10) Fraction(33, 10)]
[mpfr('0.29999999999999999') mpfr('1.3') mpfr('2.2999999999999998') mpfr('3.2999999999999998')]
[[0.300000000000000 +/- 6.67e-17] [1.30000000000000 +/- 4.56e-16] [2.30000000000000 +/- 1.79e-15] [3.30000000000000 +/-
↪ 3.12e-15]]

>>> # arange with 3 arguments, increasing:
>>> for ctx in ctx_all: print(npm.arange(1, 2, 0.25, dtype=ctx))
[1.   1.25 1.5  1.75]
[mpf('1.0') mpf('1.25') mpf('1.5') mpf('1.75')]
[mpi('1.0', '1.0') mpi('1.25', '1.25') mpi('1.5', '1.5') mpi('1.75', '1.75')]
[Decimal('1') Decimal('1.25') Decimal('1.50') Decimal('1.75')]
[Fraction(1, 1) Fraction(5, 4) Fraction(3, 2) Fraction(7, 4)]
[mpfr('1.0') mpfr('1.25') mpfr('1.5') mpfr('1.75')]
[1.00000000000000 1.25000000000000 1.50000000000000 1.75000000000000]

>>> # arange with 3 arguments, decreasing:
>>> for ctx in ctx_all: print(npm.arange(1, -1, -0.75, dtype=ctx))
[1.   1.25 1.5  1.75]
[mpf('1.0') mpf('1.25') mpf('1.5') mpf('1.75')]
[mpi('1.0', '1.0') mpi('1.25', '1.25') mpi('1.5', '1.5') mpi('1.75', '1.75')]
[Decimal('1') Decimal('1.25') Decimal('1.50') Decimal('1.75')]
[Fraction(1, 1) Fraction(5, 4) Fraction(3, 2) Fraction(7, 4)]
[mpfr('1.0') mpfr('1.25') mpfr('1.5') mpfr('1.75')]
[1.00000000000000 1.25000000000000 1.50000000000000 1.75000000000000]
```

From mpmath. See also Mpmath [682].

This is a generalized version of Python's `range()` function that accepts fractional endpoints and step sizes and returns a list of `mpf` instances.

Like `range()`, *`arange()`* can be called with 1, 2 or 3 arguments:

arange(b)
$[0, 1, 2, \ldots, x]$

arange(a, b)
$[a, a+1, a+2, \ldots, x]$

arange(a, b, h)
$[a, a+h, a+h, \ldots, x]$

where $b-1 \le x < b$ (in the third case, $b-h \le x < b$).

Like Python's `range()`, the endpoint is not included. To produce ranges where the endpoint is included, *`linspace()`* is more convenient.

Examples:

```
>>> from xlcalcnet import fp, mp, iv, dp, gp, ap

>>> for ctx in [fp, mp, iv, dp, gp, ap]: print(ctx.arange(4))
[0.0, 1.0, 2.0, 3.0]
[mpf('0.0'), mpf('1.0'), mpf('2.0'), mpf('3.0')]
[mpi('0.0', '0.0'), mpi('1.0', '1.0'), mpi('2.0', '2.0'), mpi('3.0', '3.0')]
[Decimal('0'), Decimal('1'), Decimal('2'), Decimal('3')]
[mpfr('0.0'), mpfr('1.0'), mpfr('2.0'), mpfr('3.0')]
[0, 1.00000000000000, 2.00000000000000, 3.00000000000000]

>>> for ctx in [fp, mp, iv, dp, gp, ap]: print(ctx.arange(1, 2, 0.25))
[1.0, 1.25, 1.5, 1.75]
[mpf('1.0'), mpf('1.25'), mpf('1.5'), mpf('1.75')]
[mpi('1.0', '1.0'), mpi('1.25', '1.25'), mpi('1.5', '1.5'), mpi('1.75', '1.75')]
[Decimal('1.00'), Decimal('1.25'), Decimal('1.50'), Decimal('1.75')]
[mpfr('1.0'), mpfr('1.25'), mpfr('1.5'), mpfr('1.75')]
[1.00000000000000, 1.25000000000000, 1.50000000000000, 1.75000000000000]

>>> for ctx in [fp, mp, iv, dp, gp, ap]: print(ctx.arange(1, -1, -0.75))
[1.0, 0.25, -0.5]
[mpf('1.0'), mpf('0.25'), mpf('-0.5')]
[mpi('1.0', '1.0'), mpi('0.25', '0.25'), mpi('-0.5', '-0.5')]
[Decimal('1.00'), Decimal('0.25'), Decimal('-0.50')]
[mpfr('1.0'), mpfr('0.25'), mpfr('-0.5')]
[1.00000000000000, 0.250000000000000, -0.500000000000000]
```

7.3.2 Evenly spaced values within a given interval: numpy.linspace

npm.linspace(*start*, *stop*, *num=50*, *endpoint=True*, *retstep=False*, *dtype=None*, *axis=0*, ***, *device=None*)

Return evenly spaced numbers over a specified interval.

See https://numpy.org/doc/stable/reference/generated/numpy.linspace.html#numpy.linspace for details.

Returns num evenly spaced samples, calculated over the interval [start, stop]. The endpoint of the interval can optionally be excluded.

```
>>> from xlcalcnet import fpm, mpm, ipm, dpm, qpm, gpm, apm, npm, np
>>> ctx_all = [fpm, mpm, ipm, dpm, qpm, gpm, apm]

>>> # linspace with endpoint=True:
>>> for ctx in ctx_all: print(npm.linspace(start=1, stop=4, num=4, dtype=ctx))
```

(continues on next page)

(continued from previous page)

```
[1. 2. 3. 4.]
[mpf('1.0') mpf('2.0') mpf('3.0') mpf('4.0')]
[mpi('1.0', '1.0') mpi('1.9999999999999998', '2.0000000000000004') mpi('2.9999999999999996', '3.0000000000000004') mpi(
↪'4.0', '4.0')]
[Decimal('1') Decimal('2.00000000000000') Decimal('3.00000000000000') Decimal('4')]
[Fraction(1, 1) Fraction(2, 1) Fraction(3, 1) Fraction(4, 1)]
[mpfr('1.0') mpfr('2.0') mpfr('3.0') mpfr('4.0')]
[1.00000000000000 [2.00000000000000 +/- 7.22e-16] [3.00000000000000 +/- 1.45e-15] 4.00000000000000]
```

```
>>> from xlcalcnet import fpm, mpm, ipm, dpm, qpm, gpm, apm, npm, np
>>> ctx_all = [fpm, mpm, ipm, dpm, qpm, gpm, apm]

>>> # linspace with endpoint=False:
>>> for ctx in ctx_all: print(npm.linspace(start=1, stop=4, num=4, dtype=ctx, endpoint=False))
[1.   1.75 2.5  3.25]
[mpf('1.0') mpf('1.75') mpf('2.5') mpf('3.25')]
[mpi('1.0', '1.0') mpi('1.75', '1.75') mpi('2.5', '2.5') mpi('3.25', '3.25')]
[Decimal('1') Decimal('1.75') Decimal('2.5') Decimal('3.25')]
[Fraction(1, 1) Fraction(7, 4) Fraction(5, 2) Fraction(13, 4)]
[mpfr('1.0') mpfr('1.75') mpfr('2.5') mpfr('3.25')]
[1.00000000000000 1.75000000000000 2.50000000000000 3.25000000000000]
```

From mpmath. . See also Mpmath [681].

`linspace(a, b, n)` returns a list of n evenly spaced samples from a to b.

The syntax `linspace(mpi(a,b), n)` is also valid.

This function is often more convenient than *arange()* for partitioning an interval into subintervals, since the endpoint is included:

```
>>> from xlcalcnet import fp, mp, iv, dp, gp, ap
>>> for ctx in [fp, mp, iv, dp, gp, ap]: print(ctx.linspace(1, 4, 4))
[1.0, 2.0, 3.0, 4.0]
[mpf('1.0'), mpf('2.0'), mpf('3.0'), mpf('4.0')]
[mpi('1.0', '1.0'), mpi('2.0', '2.0'), mpi('3.0', '3.0'), mpi('4.0', '4.0')]
[Decimal('1'), Decimal('2'), Decimal('3'), Decimal('4')]
[mpfr('1.0'), mpfr('2.0'), mpfr('3.0'), mpfr('4.0')]
[1.00000000000000, 2.00000000000000, 3.00000000000000, 4.00000000000000]
```

You may also provide the keyword argument `endpoint=False`:

```
>>> for ctx in [fp, mp, iv, dp, gp, ap]: print(ctx.linspace(1, 4, 4, endpoint=False))
[1.0, 1.75, 2.5, 3.25]
[mpf('1.0'), mpf('1.75'), mpf('2.5'), mpf('3.25')]
[mpi('1.0', '1.0'), mpi('1.75', '1.75'), mpi('2.5', '2.5'), mpi('3.25', '3.25')]
[Decimal('1.00'), Decimal('1.75'), Decimal('2.50'), Decimal('3.25')]
[mpfr('1.0'), mpfr('1.75'), mpfr('2.5'), mpfr('3.25')]
[1.00000000000000, 1.75000000000000, 2.50000000000000, 3.25000000000000]
```

7.3.3 Evenly spaced values on a log scale: numpy.logspace

`npm.logspace`(*start*, *stop*, *num=50*, *endpoint=True*, *base=10.0*, *dtype=None*, *axis=0*)

Return numbers spaced evenly on a log scale. In linear space, the sequence starts at base ** start (base to the power of start) and ends with base ** stop.

See https://numpy.org/doc/stable/reference/generated/numpy.logspace.html#numpy.logspace for details.

```
>>> from xlcalcnet import fpm, mpm, ipm, dpm, qpm, gpm, apm, npm, np
>>> ctx_all = [fpm, mpm, ipm, dpm, qpm, gpm, apm]

>>> # linspace with endpoint=True:
```

(continues on next page)

(continued from previous page)

```
>>> for ctx in ctx_all: print(npm.logspace(start=2, stop=3, num=4, dtype=ctx))
[100.0 215.44346900318845 464.15888336127773 1000.0]
[mpf('100.0') mpf('215.44346900318845') mpf('464.15888336127773') mpf('1000.0')]
[mpi('100.0', '100.0') mpi('215.4434690031882', '215.44346900318845') mpi('464.15888336127773', '464.15888336127824')␣
↪mpi('1000.0', '1000.0')]
[Decimal('100.00') Decimal('215.443469003187') Decimal('464.158883361281') Decimal('1000.000')]
[mpfr('100.0') mpfr('215.44346900318845') mpfr('464.15888336127773') mpfr('1000.0')]
[100.000000000000 [215.443469003188 +/- 7.77e-13] [464.15888336128 +/- 4.29e-12] 1000.00000000000]
```

```
>>> from xlcalcnet import fpm, mpm, ipm, dpm, qpm, gpm, apm, npm, np
>>> ctx_all = [fpm, mpm, ipm, dpm, qpm, gpm, apm]

>>> # linspace with endpoint=False:
>>> for ctx in ctx_all: print(npm.logspace(start=2, stop=3, num=4, dtype=ctx, endpoint=False))
[100.0 177.82794100389228 316.22776601683796 562.341325190349]
[mpf('100.0') mpf('177.82794100389228') mpf('316.22776601683796') mpf('562.34132519034904')]
[mpi('100.0', '100.0') mpi('177.82794100389228', '177.82794100389231') mpi('316.2277660168379', '316.22776601683796')␣
↪mpi('562.34132519034904', '562.34132519034915')]
[Decimal('100.00') Decimal('177.827941003892') Decimal('316.227766016838') Decimal('562.341325190349')]
[mpfr('100.0') mpfr('177.82794100389228') mpfr('316.22776601683796') mpfr('562.34132519034904')]
[100.000000000000 [177.827941003892 +/- 4.44e-13] [316.227766016838 +/- 1.44e-13] [562.34132519035 +/- 3.06e-12]]
```

7.3.4 Evenly spaced values on a log scale (a geometric progression): numpy.geomspace

npm.**geomspace**(*start*, *stop*, *num=50*, *endpoint=True*, *dtype=None*, *axis=0*)

Return numbers spaced evenly on a log scale (a geometric progression).

See https://numpy.org/doc/stable/reference/generated/numpy.geomspace.html#numpy.geomspace for details.

This is similar to logspace, but with endpoints specified directly. Each output sample is a constant multiple of the previous. If the inputs or dtype are complex, the output will follow a logarithmic spiral in the complex plane. (There are an infinite number of spirals passing through two points; the output will follow the shortest such path.)

```
>>> from xlcalcnet import fpm, mpm, ipm, dpm, qpm, gpm, apm, npm, np
>>> ctx_all = [fpm, mpm, ipm, dpm, gpm, apm]

>>> # geomspace with endpoint=True:
>>> for ctx in ctx_all: print(npm.geomspace(start=1, stop=1000, num=4, dtype=ctx))
[1.0 10.0 100.0 1000.0]
[mpf('1.0') mpf('10.0') mpf('100.0') mpf('1000.0')]
[mpi('1.0', '1.0') mpi('9.9999999999999947', '10.000000000000011') mpi('99.999999999999886', '100.00000000000021') mpi(
↪'999.99999999999898', '1000.0000000000001')]
[Decimal('1') Decimal('9.99999999999998') Decimal('100.00') Decimal('1000.000')]
[mpfr('1.0') mpfr('10.0') mpfr('100.0') mpfr('1000.0')]
[1.00000000000000 [10.000000000000 +/- 3.50e-14] [100.00000000000 +/- 6.79e-13] [1000.0000000000 +/- 6.72e-12]]
```

```
>>> from xlcalcnet import fpm, mpm, ipm, dpm, qpm, gpm, apm, npm, np
>>> ctx_all = [fpm, mpm, ipm, dpm, gpm, apm]

>>> # geomspace with endpoint=False:
>>> for ctx in ctx_all: print(npm.geomspace(start=1, stop=1000, num=4, dtype=ctx, endpoint=False))
[1.0 5.623413251903491 31.622776601683793 177.82794100389228]
[mpf('1.0') mpf('5.6234132519034912') mpf('31.622776601683793') mpf('177.82794100389228')]
[mpi('1.0', '1.0') mpi('5.6234132519034885', '5.6234132519034929') mpi('31.622776601683775', '31.62277660168381') mpi(
↪'177.82794100389208', '177.82794100389248')]
[Decimal('1') Decimal('5.62341325190349') Decimal('31.6227766016838') Decimal('177.827941003892')]
[mpfr('1.0') mpfr('5.6234132519034912') mpfr('31.622776601683793') mpfr('177.82794100389228')]
[1.00000000000000 [5.6234132519035 +/- 2.01e-14] [31.622776601684 +/- 3.16e-13] [177.827941003892 +/- 8.76e-13]]
```

```
>>> from xlcalcnet import fpm, mpm, ipm, dpm, qpm, gpm, apm, npm, np
>>> ctx_all = [fpm, mpm, ipm, dpm, gpm, apm]
```

(continues on next page)

(continued from previous page)

```
>>> # geomspace with powers of 2:
>>> for ctx in ctx_all: print(npm.geomspace(start=1, stop=1000, num=4, dtype=ctx, endpoint=False))
[1.0 2.0 4.0 7.999999999999999 16.0 32.00000000000001 63.999999999999986 127.99999999999999 256.0]
[mpf('1.0') mpf('2.0') mpf('4.0') mpf('7.9999999999999991') mpf('16.0') mpf('32.000000000000007') mpf('63.
↪999999999999986') mpf('127.99999999999999') mpf('256.0')]
[mpi('1.0', '1.0') mpi('1.9999999999999996', '2.0000000000000004') mpi('3.9999999999999987', '4.0000000000000009') mpi(
↪'7.9999999999999964', '8.0000000000000018')
 mpi('15.999999999999991', '16.000000000000004') mpi('31.999999999999972', '32.000000000000007') mpi('63.99999999999995
↪', '64.000000000000028') mpi('127.99999999999986', '128.00000000000014')
 mpi('255.99999999999974', '256.00000000000006')]
[Decimal('1') Decimal('2.00000000000000') Decimal('4.00000000000000') Decimal('8.00000000000001') Decimal('15.
↪9999999999998') Decimal('32.0000000000003') Decimal('64.0000000000004')
 Decimal('128.000000000000') Decimal('256.000000000000')]
[mpfr('1.0') mpfr('2.0') mpfr('4.0') mpfr('7.9999999999999991') mpfr('16.0') mpfr('32.000000000000007') mpfr('63.
↪999999999999986') mpfr('127.99999999999999') mpfr('256.0')]
[1.00000000000000 [2.00000000000000 +/- 1.94e-15] [4.00000000000000 +/- 6.84e-15] [8.0000000000000 +/- 2.44e-14] [16.
↪0000000000000 +/- 5.11e-14] [32.000000000000 +/- 1.50e-13]
 [64.000000000000 +/- 3.82e-13] [128.000000000000 +/- 8.82e-13] [256.00000000000 +/- 1.61e-12]]
```

7.3.5 Extract a diagonal or construct a diagonal array: numpy.diag

npm.**diag**(*v*, *k=0*)

Extract a diagonal or construct a diagonal array.

See https://numpy.org/doc/stable/reference/generated/numpy.diag.html#numpy.diag for details.

See the more detailed documentation for numpy.diagonal if you use this function to extract a diagonal and wish to write to the resulting array; whether it returns a copy or a view depends on what version of numpy you are using.

Array x:

```
>>> from xlcalcnet import fpm, mpm, ipm, dpm, qpm, gpm, apm, npm, np
>>> ctx_all = [fpm, mpm, ipm, dpm, gpm, apm]

>>> for ctx in ctx_all: x = npm.arange(9, dtype=ctx).reshape((3,3)); print(ctx.name +', x: \n', x)
fpm, x:
 [[0. 1. 2.]
 [3. 4. 5.]
 [6. 7. 8.]]
mpm, x:
 [[mpf('0.0') mpf('1.0') mpf('2.0')]
 [mpf('3.0') mpf('4.0') mpf('5.0')]
 [mpf('6.0') mpf('7.0') mpf('8.0')]]
ipm, x:
 [[mpi('0.0', '0.0') mpi('1.0', '1.0') mpi('2.0', '2.0')]
 [mpi('3.0', '3.0') mpi('4.0', '4.0') mpi('5.0', '5.0')]
 [mpi('6.0', '6.0') mpi('7.0', '7.0') mpi('8.0', '8.0')]]
dpm, x:
 [[Decimal('0') Decimal('1') Decimal('2')]
 [Decimal('3') Decimal('4') Decimal('5')]
 [Decimal('6') Decimal('7') Decimal('8')]]
qpm, x:
 [[Fraction(0, 1) Fraction(1, 1) Fraction(2, 1)]
 [Fraction(3, 1) Fraction(4, 1) Fraction(5, 1)]
 [Fraction(6, 1) Fraction(7, 1) Fraction(8, 1)]]
gpm, x:
 [[mpfr('0.0') mpfr('1.0') mpfr('2.0')]
 [mpfr('3.0') mpfr('4.0') mpfr('5.0')]
 [mpfr('6.0') mpfr('7.0') mpfr('8.0')]]
apm, x:
 [[0 1.00000000000000 2.00000000000000]
 [3.00000000000000 4.00000000000000 5.00000000000000]
 [6.00000000000000 7.00000000000000 8.00000000000000]]
```

Diagonal of array x:

```
>>> for ctx in ctx_all: x = npm.arange(9, dtype=ctx).reshape((3,3)); print(ctx.name +', diag(x): \n', npm.diag(x))
fpm, diag(x):
 [0. 4. 8.]
mpm, diag(x):
 [mpf('0.0') mpf('4.0') mpf('8.0')]
ipm, diag(x):
 [mpi('0.0', '0.0') mpi('4.0', '4.0') mpi('8.0', '8.0')]
dpm, diag(x):
 [Decimal('0') Decimal('4') Decimal('8')]
qpm, diag(x):
 [Fraction(0, 1) Fraction(4, 1) Fraction(8, 1)]
gpm, diag(x):
 [mpfr('0.0') mpfr('4.0') mpfr('8.0')]
apm, diag(x):
 [0 4.00000000000000 8.00000000000000]
```

Superdiagonal of array x:

```
>>> for ctx in ctx_all: x = npm.arange(9, dtype=ctx).reshape((3,3)); print(ctx.name +', diag(x, k=1): \n', npm.diag(x,␣
↪k=1))
fpm, diag(x, k=1):
 [1. 5.]
mpm, diag(x, k=1):
 [mpf('1.0') mpf('5.0')]
ipm, diag(x, k=1):
 [mpi('1.0', '1.0') mpi('5.0', '5.0')]
dpm, diag(x, k=1):
 [Decimal('1') Decimal('5')]
qpm, diag(x, k=1):
 [Fraction(1, 1) Fraction(5, 1)]
gpm, diag(x, k=1):
 [mpfr('1.0') mpfr('5.0')]
apm, diag(x, k=1):
 [1.00000000000000 5.00000000000000]
```

Subdiagonal of array x:

```
>>> for ctx in ctx_all: x = npm.arange(9, dtype=ctx).reshape((3,3)); print(ctx.name +', diag(x, k=-1): \n', npm.diag(x,
↪ k=-1))
fpm, diag(x, k=-1):
 [3. 7.]
mpm, diag(x, k=-1):
 [mpf('3.0') mpf('7.0')]
ipm, diag(x, k=-1):
 [mpi('3.0', '3.0') mpi('7.0', '7.0')]
dpm, diag(x, k=-1):
 [Decimal('3') Decimal('7')]
qpm, diag(x, k=-1):
 [Fraction(3, 1) Fraction(7, 1)]
gpm, diag(x, k=-1):
 [mpfr('3.0') mpfr('7.0')]
apm, diag(x, k=-1):
 [3.00000000000000 7.00000000000000]
```

Setting the diagonal. Note that only the diagonal values are set, the others are just 0.

```
>>> for ctx in ctx_all: x = npm.arange(9, dtype=ctx).reshape((3,3)); print(ctx.name +', npm.diag(npm.diag(x)): \n',␣
↪npm.diag(npm.diag(x)))
fpm, npm.diag(npm.diag(x)):
 [[0. 0. 0.]
 [0. 4. 0.]
 [0. 0. 8.]]
mpm, npm.diag(npm.diag(x)):
```

(continues on next page)

(continued from previous page)

```
 [[mpf('0.0') 0 0]
 [0 mpf('4.0') 0]
 [0 0 mpf('8.0')]]
ipm, npm.diag(npm.diag(x)):
 [[mpi('0.0', '0.0') 0 0]
 [0 mpi('4.0', '4.0') 0]
 [0 0 mpi('8.0', '8.0')]]
dpm, npm.diag(npm.diag(x)):
 [[Decimal('0') 0 0]
 [0 Decimal('4') 0]
 [0 0 Decimal('8')]]
qpm, npm.diag(npm.diag(x)):
 [[Fraction(0, 1) 0 0]
 [0 Fraction(4, 1) 0]
 [0 0 Fraction(8, 1)]]
gpm, npm.diag(npm.diag(x)):
 [[mpfr('0.0') 0 0]
 [0 mpfr('4.0') 0]
 [0 0 mpfr('8.0')]]
apm, npm.diag(npm.diag(x)):
 [[0 0 0]
 [0 4.00000000000000 0]
 [0 0 8.00000000000000]]
```

7.3.6 Extract specified diagonals: numpy.diagonal

npm.**diagonal**(*a*, *offset=0*, *axis1=0*, *axis2=1*)

Return specified diagonals.

See https://numpy.org/doc/stable/reference/generated/numpy.diagonal.html for details.

If a is 2-D, returns the diagonal of a with the given offset, i.e., the collection of elements of the form a[i, i+offset]. If a has more than two dimensions, then the axes specified by axis1 and axis2 are used to determine the 2-D sub-array whose diagonal is returned. The shape of the resulting array can be determined by removing axis1 and axis2 and appending an index to the right equal to the size of the resulting diagonals.

```
>>> import numpy as np; from xlcalcnet import mpm, dpm

>>> a = np.arange(4).reshape(2,2)
>>> a
array([[0, 1],
       [2, 3]])
>>> a.diagonal()
array([0, 3])
>>> a.diagonal()
array([0, 3])
a.diagonal(1)
array([1])

>>> # A 3-D example:
>>> a = np.arange(8).reshape(2,2,2); a
array([[[0, 1],
    [2, 3]],
   [[4, 5],
    [6, 7]]])
>>> a.diagonal(0,0,1)
array([[0, 6],
   [1, 7]])

>>> # The sub-arrays whose main diagonals we just obtained; note that each corresponds
>>> # to fixing the right-most
>>> # (column) axis, and that the diagonals are "packed" in rows.
>>> a[:,:,0]  # main diagonal is [0 6]
```

(continues on next page)

(continued from previous page)

```
array([[0, 2],
   [4, 6]])
>>> a[:,:,1]  # main diagonal is [1 7]
array([[1, 3],
   [5, 7]])


>>> # The anti-diagonal can be obtained by reversing the order of elements using either
>>> # numpy.flipud or numpy.fliplr.
>>> a = np.arange(9).reshape(3, 3); a
array([[0, 1, 2],
   [3, 4, 5],
   [6, 7, 8]])
>>> np.fliplr(a).diagonal()  # Horizontal flip
array([2, 4, 6])
>>> np.flipud(a).diagonal()  # Vertical flip
array([2, 4, 6])
array([6, 4, 2])
```

7.3.7 Two-dimensional array with the flattened input as a diagonal: numpy.diagflat

npm.**diagflat**(*v*, *k=0*)

Create a two-dimensional array with the flattened input as a diagonal.

See https://numpy.org/doc/stable/reference/generated/numpy.diagflat.html#numpy.diagflat for details.

Create a two-dimensional array with the flattened input as a diagonal.

```
>>> import numpy as np; from xlcalcnet import mpm, dpm

>>> np.diagflat([[1,2], [3,4]])
array([[1, 0, 0, 0],
   [0, 2, 0, 0],
   [0, 0, 3, 0],
   [0, 0, 0, 4]])

>>> np.diagflat([1,2], 1)
array([[0, 1, 0],
   [0, 0, 2],
   [0, 0, 0]])
```

7.3.8 Lower triangle of an array: numpy.tril

npm.**tril**(*m*, *k=0*)

Returns the lower triangle of an array.

See https://numpy.org/doc/stable/reference/generated/numpy.tril.html#numpy.tril for details

Return a copy of an array with elements above the k-th diagonal zeroed. For arrays with ndim exceeding 2, tril will apply to the final two axes.

```
>>> import numpy as np; from xlcalcnet import mpm, dpm

>>> np.tril([[1,2,3],[4,5,6],[7,8,9],[10,11,12]], -1)
array([[ 0,  0,  0],
   [ 4,  0,  0],
   [ 7,  8,  0],
   [10, 11, 12]])

>>> np.tril(np.arange(3*4*5).reshape(3, 4, 5))
array([[[ 0,  0,  0,  0,  0],
```

(continues on next page)

(continued from previous page)

```
    [ 5,  6,  0,  0,  0],
    [10, 11, 12,  0,  0],
    [15, 16, 17, 18,  0]],
   [[20,  0,  0,  0,  0],
    [25, 26,  0,  0,  0],
    [30, 31, 32,  0,  0],
    [35, 36, 37, 38,  0]],
   [[40,  0,  0,  0,  0],
    [45, 46,  0,  0,  0],
    [50, 51, 52,  0,  0],
    [55, 56, 57, 58,  0]]])
```

7.3.9 Upper triangle of an array: numpy.triu

npm.**triu**(*m*, *k=0*)

Returns the upper triangle of an array.

See https://numpy.org/doc/stable/reference/generated/numpy.triu.html#numpy.triu for details

Return a copy of an array with the elements below the k-th diagonal zeroed. For arrays with ndim exceeding 2, triu will apply to the final two axes.

```
>>> import numpy as np; from xlcalcnet import mpm, dpm

>>> np.triu([[1,2,3],[4,5,6],[7,8,9],[10,11,12]], -1)
array([[ 1,  2,  3],
   [ 4,  5,  6],
   [ 0,  8,  9],
   [ 0,  0, 12]])

>>> np.triu(np.arange(3*4*5).reshape(3, 4, 5))
array([[[ 0,  1,  2,  3,  4],
    [ 0,  6,  7,  8,  9],
    [ 0,  0, 12, 13, 14],
    [ 0,  0,  0, 18, 19]],
   [[20, 21, 22, 23, 24],
    [ 0, 26, 27, 28, 29],
    [ 0,  0, 32, 33, 34],
    [ 0,  0,  0, 38, 39]],
   [[40, 41, 42, 43, 44],
    [ 0, 46, 47, 48, 49],
    [ 0,  0, 52, 53, 54],
    [ 0,  0,  0, 58, 59]]])
```

7.3.10 Vandermonde matrix.: numpy.vander

npm.**vander**(*x*, *N=None*, *increasing=False*)

Generate a Vandermonde matrix.

See https://numpy.org/doc/stable/reference/generated/numpy.vander.html#numpy.vander for details

The columns of the output matrix are powers of the input vector. The order of the powers is determined by the increasing boolean argument. Specifically, when increasing is False, the i-th output column is the input vector raised element-wise to the power of N - i - 1.

```
>>> import numpy as np; from xlcalcnet import mpm, dpm

>>> x = np.array([1, 2, 3, 5])
>>> N = 3
>>> np.vander(x, N)
array([[ 1,  1,  1],
```

(continues on next page)

(continued from previous page)

```
       [ 4,  2,  1],
       [ 9,  3,  1],
       [25,  5,  1]])

>>> np.column_stack([x**(N-1-i) for i in range(N)])
array([[ 1,  1,  1],
   [ 4,  2,  1],
   [ 9,  3,  1],
   [25,  5,  1]])


>>> x = np.array([1, 2, 3, 5])
>>> np.vander(x)
array([[  1,   1,   1,   1],
   [  8,   4,   2,   1],
   [ 27,   9,   3,   1],
   [125,  25,   5,   1]])
>>> np.vander(x, increasing=True)
array([[  1,   1,   1,   1],
   [  1,   2,   4,   8],
   [  1,   3,   9,  27],
   [  1,   5,  25, 125]])


>>> # The determinant of a square Vandermonde matrix is the product of the differences
>>> # between the values of the input vector:
>>> np.linalg.det(np.vander(x))
8.000000000000043 # may vary
>>> (5-3)*(5-2)*(5-1)*(3-2)*(3-1)*(2-1)
48
```

Example: Creating a Hilbert matrix as a dictionary (mpmath matrix)

Create (pseudo) hilbert matrix m x n. One given dimension will create hilbert matrix n x n.

The matrix is very ill-conditioned and symmetric, positive definite if square.

Example: Creating a random matrix as a dictionary (mpmath matrix)

Returns a random matrix as a dictionary (mpmath matrix).

Create a random m x n matrix. All values are >= min and <max. n defaults to m.

Example: Swap of rows in a mpmath matrix

Swaps rows in a mpmath matrix. Swap row i with row j.

Example: Extending a mpmath matrix by another column

Extends a mpmath matrix. Extend matrix A with column b and return result.

Example: Unit vectors

Returns the i-th n-dimensional unit vector as a mpmath matrix

7.4 Numpy indexing

https://numpy.org/doc/stable/user/basics.indexing.html

ndarrays can be indexed using the standard Python x[obj] syntax, where x is the array and obj the selection. There are different kinds of indexing available depending on obj: basic indexing, advanced indexing and field access.

Most of the following examples show the use of indexing when referencing data in an array. The examples work just as well when assigning to an array. See Assigning values to indexed arrays for specific examples and explanations on how assignments work.

Note that in Python, x[(exp1, exp2, ..., expN)] is equivalent to x[exp1, exp2, ..., expN]; the latter is just syntactic sugar for the former.

7.4.1 Single element indexing

See https://numpy.org/doc/stable/user/basics.indexing.html#basic-indexing

Single element indexing works exactly like that for other standard Python sequences. It is 0-based, and accepts negative indices for indexing from the end of the array.

```
>>> import numpy as np; from xlcalcnet import mpm, dpm
>>> x = np.arange(10)
>>> x[2]
2
>>> x[-2]
8
```

It is not necessary to separate each dimension's index into its own set of square brackets.

```
>>> x.shape = (2, 5)  # now x is 2-dimensional
>>> x[1, 3]
8
>>> x[1, -1]
9
```

Note that if one indexes a multidimensional array with fewer indices than dimensions, one gets a subdimensional array. For example:

```
>>> x[0]
array([0, 1, 2, 3, 4])
```

That is, each index specified selects the array corresponding to the rest of the dimensions selected. In the above example, choosing 0 means that the remaining dimension of length 5 is being left unspecified, and that what is returned is an array of that dimensionality and size. It must be noted that the returned array is a view, i.e., it is not a copy of the original, but points to the same values in memory as does the original array. In this case, the 1-D array at the first position (0) is returned. So using a single index on the returned array, results in a single element being returned. That is:

```
>>> x[0][2]
2
```

7.4.2 Slicing and striding

Basic slicing extends Python's basic concept of slicing to N dimensions. Basic slicing occurs when obj is a slice object (constructed by start:stop:step notation inside of brackets), an integer, or a tuple of slice objects and integers. Ellipsis and newaxis objects can be interspersed with these as well.

The simplest case of indexing with N integers returns an array scalar representing the corresponding item. As in Python, all indices are zero-based: for the i-th index n_i, the valid range is $0 \leq n_i < d_i$, where d_i is the i-th element of the shape of the array. Negative indices are interpreted as counting from the end of the array (i.e., if $n_i < 0$, it means $n_i + d_i$).

All arrays generated by basic slicing are always views of the original array. NumPy slicing creates a view instead of a copy as in the case of built-in Python sequences such as string, tuple and list. Care must be taken when extracting a small portion from a large array

which becomes useless after the extraction, because the small portion extracted contains a reference to the large original array whose memory will not be released until all arrays derived from it are garbage-collected. In such cases an explicit copy() is recommended.

The standard rules of sequence slicing apply to basic slicing on a per-dimension basis (including using a step index). Some useful concepts to remember include:

The basic slice syntax is i:j:k where i is the starting index, j is the stopping index, and k is the step ($k \neq 0$). This selects the m elements (in the corresponding dimension) with index values $i, i+k, \ldots, i+(m-1)k$ where $m = q + (r \neq 0)$ and q and r are the quotient and remainder obtained by dividing $j - i$ by $k : j - i = qk + r$, so that $i + (m-1)k < j$. For example:

```
>>> import numpy as np; from xlcalcnet import mpm, dpm
>>> x = np.array([0, 1, 2, 3, 4, 5, 6, 7, 8, 9])
>>> x[1:7:2]
array([1, 3, 5])
```

Negative i and j are interpreted as $n + i$ and $n + j$ where n is the number of elements in the corresponding dimension. Negative k makes stepping go towards smaller indices. From the above example:

```
>>> x[-2:10]
array([8, 9])
>>> x[-3:3:-1]
array([7, 6, 5, 4])
```

Assume n is the number of elements in the dimension being sliced. Then, if i is not given it defaults to 0 for $k > 0$ and $n - 1$ for $k < 0$. If j is not given it defaults to n for $k > 0$ and $-n - 1$ for $k < 0$. If k is not given it defaults to 1. Note that `::` is the same as `:` and means select all indices along this axis. From the above example:

```
>>> x[5:]
array([5, 6, 7, 8, 9])
```

If the number of objects in the selection tuple is less than N, then `:` is assumed for any subsequent dimensions. For example:

```
>>> import numpy as np; from xlcalcnet import mpm, dpm
>>> x = np.array([[[1],[2],[3]], [[4],[5],[6]]])
>>> x.shape
(2, 3, 1)
>>> x[1:2]
array([[[4],
    [5],
    [6]]])
```

An integer, i, returns the same values as `i:i+1` except the dimensionality of the returned object is reduced by 1. In particular, a selection tuple with the p-th element an integer (and all other entries :) returns the corresponding sub-array with dimension $N - 1$. If $N = 1$ then the returned object is an array scalar.

If the selection tuple has all entries : except the p-th entry which is a slice object `i:j:k`, then the returned array has dimension N formed by concatenating the sub-arrays returned by integer indexing of elements $i, i+k, \ldots, i+(m-1)k < j$.

Basic slicing with more than one non-`:` entry in the slicing tuple, acts like repeated application of slicing using a single non-`:` entry, where the non-`:` entries are successively taken (with all other non-`:` entries replaced by :). Thus, `x[ind1, ..., ind2,:]` acts like `x[ind1][..., ind2, :]` under basic slicing.

You may use slicing to set values in the array, but (unlike lists) you can never grow the array. The size of the value to be set in `x[obj] = value` must be (broadcastable to) the same shape as `x[obj]`.

A slicing tuple can always be constructed as *obj* and used in the `x[obj]` notation. Slice objects can be used in the construction in place of the `[start:stop:step]` notation. For example, `x[1:10:5, ::-1]` can also be implemented as `obj = (slice(1, 10, 5), slice(None, None, -1)); x[obj]`. This can be useful for constructing generic code that works on arrays of arbitrary dimensions.

7.4.3 Dimensional indexing tools

There are some tools to facilitate the easy matching of array shapes with expressions and in assignments.

Ellipsis expands to the number of : objects needed for the selection tuple to index all dimensions. In most cases, this means that the length of the expanded selection tuple is x.ndim. There may only be a single ellipsis present. From the above example:

```
>>> x[..., 0]
array([[1, 2, 3],
  [4, 5, 6]])
```

This is equivalent to:

```
>>> x[:, :, 0]
array([[1, 2, 3],
  [4, 5, 6]])
```

Each newaxis object in the selection tuple serves to expand the dimensions of the resulting selection by one unit-length dimension. The added dimension is the position of the newaxis object in the selection tuple. newaxis is an alias for None, and None can be used in place of this with the same result. From the above example:

```
>>> x[:, np.newaxis, :, :].shape
(2, 1, 3, 1)
>>> x[:, None, :, :].shape
(2, 1, 3, 1)
```

This can be handy to combine two arrays in a way that otherwise would require explicit reshaping operations. For example:

```
>>> x = np.arange(5)
>>> x[:, np.newaxis] + x[np.newaxis, :]
array([[0, 1, 2, 3, 4],
  [1, 2, 3, 4, 5],
  [2, 3, 4, 5, 6],
  [3, 4, 5, 6, 7],
  [4, 5, 6, 7, 8]])
```

7.4.4 Broadcasting Overview

https://numpy.org/doc/stable/user/basics.broadcasting.html#basics-broadcasting

The term broadcasting describes how NumPy treats arrays with different shapes during arithmetic operations. Subject to certain constraints, the smaller array is "broadcast" across the larger array so that they have compatible shapes. Broadcasting provides a means of vectorizing array operations so that looping occurs in C instead of Python. It does this without making needless copies of data and usually leads to efficient algorithm implementations. There are, however, cases where broadcasting is a bad idea because it leads to inefficient use of memory that slows computation.

NumPy operations are usually done on pairs of arrays on an element-by-element basis. In the simplest case, the two arrays must have exactly the same shape, as in the following example:

```
>>> import numpy as np; from xlcalcnet import mpm, dpm
>>> a = np.array([1.0, 2.0, 3.0])
>>> b = np.array([2.0, 2.0, 2.0])
>>> a * b
array([2.,  4.,  6.])
```

NumPy's broadcasting rule relaxes this constraint when the arrays' shapes meet certain constraints. The simplest broadcasting example occurs when an array and a scalar value are combined in an operation:

```
>>> import numpy as np; from xlcalcnet import mpm, dpm
>>> a = np.array([1.0, 2.0, 3.0])
>>> b = 2.0
```

(continues on next page)

(continued from previous page)

```
>>> a * b
array([2.,  4.,  6.])
```

The result is equivalent to the previous example where b was an array. We can think of the scalar b being stretched during the arithmetic operation into an array with the same shape as a. The new elements in b, as shown in Figure 1, are simply copies of the original scalar. The stretching analogy is only conceptual. NumPy is smart enough to use the original scalar value without actually making copies so that broadcasting operations are as memory and computationally efficient as possible.

FIGURE 1

The code in the second example is more efficient than that in the first because broadcasting moves less memory around during the multiplication (b is a scalar rather than an array).

7.4.5 General Broadcasting Rules

When operating on two arrays, NumPy compares their shapes element-wise. It starts with the trailing (i.e. rightmost) dimension and works its way left. Two dimensions are compatible when they are equal, or one of them is 1.

If these conditions are not met, a `ValueError: operands could not be broadcast together` exception is thrown, indicating that the arrays have incompatible shapes.

Input arrays do not need to have the same *number* of dimensions. The resulting array will have the same number of dimensions as the input array with the greatest number of dimensions, where the size of each dimension is the largest size of the corresponding dimension among the input arrays. Note that missing dimensions are assumed to have size one.

For example, if you have a 256x256x3 array of RGB values, and you want to scale each color in the image by a different value, you can multiply the image by a one-dimensional array with 3 values. Lining up the sizes of the trailing axes of these arrays according to the broadcast rules, shows that they are compatible:

```
Image  (3d array): 256 x 256 x 3
Scale  (1d array):             3
Result (3d array): 256 x 256 x 3
```

When either of the dimensions compared is one, the other is used. In other words, dimensions with size 1 are stretched or "copied" to match the other.

In the following example, both the A and B arrays have axes with length one that are expanded to a larger size during the broadcast operation:

```
A      (4d array):  8 x 1 x 6 x 1
B      (3d array):      7 x 1 x 5
Result (4d array):  8 x 7 x 6 x 5
```

7.4.6 Broadcastable arrays

A set of arrays is called "broadcastable" to the same shape if the above rules produce a valid result.

For example, if a.shape is (5,1), b.shape is (1,6), c.shape is (6,) and d.shape is () so that d is a scalar, then a, b, c, and d are all broadcastable to dimension (5,6); and

a acts like a (5,6) array where a[:,0] is broadcast to the other columns,

b acts like a (5,6) array where b[0,:] is broadcast to the other rows,

c acts like a (1,6) array and therefore like a (5,6) array where c[:] is broadcast to every row, and finally,

d acts like a (5,6) array where the single value is repeated.

Here are some more examples:

```
A      (2d array):  5 x 4
B      (1d array):      1
Result (2d array):  5 x 4

A      (2d array):  5 x 4
B      (1d array):      4
Result (2d array):  5 x 4

A      (3d array):  15 x 3 x 5
B      (3d array):  15 x 1 x 5
Result (3d array):  15 x 3 x 5

A      (3d array):  15 x 3 x 5
B      (2d array):       3 x 5
Result (3d array):  15 x 3 x 5

A      (3d array):  15 x 3 x 5
B      (2d array):       3 x 1
Result (3d array):  15 x 3 x 5
```

Here are examples of shapes that do not broadcast:

```
A      (1d array):  3
B      (1d array):  4 # trailing dimensions do not match

A      (2d array):      2 x 1
B      (3d array):  8 x 4 x 3 # second from last dimensions mismatched
```

An example of broadcasting when a 1-d array is added to a 2-d array:

```
>>> import numpy as np; from xlcalcnet import mpm, dpm

>>> a = np.array([[ 0.0,  0.0,  0.0], [10.0, 10.0, 10.0], [20.0, 20.0, 20.0], [30.0, 30.0, 30.0]])
>>> b = np.array([1.0, 2.0, 3.0])
>>> a + b
array([[  1.,   2.,   3.],
       [11.,  12.,  13.],
       [21.,  22.,  23.],
       [31.,  32.,  33.]])
>>> b = np.array([1.0, 2.0, 3.0, 4.0])
>>> a + b
Traceback (most recent call last):
ValueError: operands could not be broadcast together with shapes (4,3) (4,)
```

When the trailing dimensions of the arrays are unequal, broadcasting fails because it is impossible to align the values in the rows of the 1st array with the elements of the 2nd arrays for element-by-element addition.

Broadcasting provides a convenient way of taking the outer product (or any other outer operation) of two arrays. The following example shows an outer addition operation of two 1-d arrays:

```
>>> import numpy as np; from xlcalcnet import mpm, dpm

>>> a = np.array([0.0, 10.0, 20.0, 30.0])
>>> b = np.array([1.0, 2.0, 3.0])
>>> a[:, np.newaxis] + b
array([[  1.,   2.,   3.],
       [11.,  12.,  13.],
       [21.,  22.,  23.],
       [31.,  32.,  33.]])
```

Here the newaxis index operator inserts a new axis into a, making it a two-dimensional 4x1 array. Combining the 4x1 array with b, which has shape (3,), yields a 4x3 array.

7.4.7 Assigning values to indexed arrays

Some text

https://numpy.org/doc/stable/user/basics.indexing.html#assigning-values-to-indexed-arrays

As mentioned, one can select a subset of an array to assign to using a single index, slices, and index and mask arrays. The value being assigned to the indexed array must be shape consistent (the same shape or broadcastable to the shape the index produces). For example, it is permitted to assign a constant to a slice:

```
>>> import numpy as np; from xlcalcnet import mpm, dpm

>>> x = np.arange(10)
>>> x[2:7] = 1
```

or an array of the right size:

```
>>> x[2:7] = np.arange(5)
```

Note that assignments may result in changes if assigning higher types to lower types (like floats to ints) or even exceptions (assigning complex to floats or ints):

```
>>> import numpy as np; from xlcalcnet import mpm, dpm

>>> x[1] = 1.2
>>> x[1]
1
>>> x[1] = 1.2j
Traceback (most recent call last):
  ...
TypeError: can't convert complex to int
```

Unlike some of the references (such as array and mask indices) assignments are always made to the original data in the array (indeed, nothing else would make sense!). Note though, that some actions may not work as one may naively expect. This particular example is often surprising to people:

```
>>> import numpy as np; from xlcalcnet import mpm, dpm

>>> x = np.arange(0, 50, 10)
>>> x
array([ 0, 10, 20, 30, 40])
>>> x[np.array([1, 1, 3, 1])] += 1
>>> x
array([ 0, 11, 20, 31, 40])
```

Where people expect that the 1st location will be incremented by 3. In fact, it will only be incremented by 1. The reason is that a new array is extracted from the original (as a temporary) containing the values at 1, 1, 3, 1, then the value 1 is added to the temporary, and then the temporary is assigned back to the original array. Thus the value of the array at x[1] + 1 is assigned to x[1] three times, rather than being incremented 3 times.

7.5 Numpy basic array manipulation routines

Some text

https://numpy.org/doc/stable/reference/routines.array-manipulation.html

7.5.1 Copy values from one array to another: numpy.copyto

npm.**copyto**(*dst*, *src*, *casting='same_kind'*, *where=True*)

Copies values from one array to another, broadcasting as necessary. Raises a TypeError if the casting rule is violated, and if where is provided, it selects which elements to copy.

See https://numpy.org/doc/stable/reference/generated/numpy.copyto.html#numpy.copyto for details

```
>>> import numpy as np; from xlcalcnet import mpm, dpm

>>> A = np.array([4, 5, 6])
>>> B = [1, 2, 3]
>>> np.copyto(A, B)
>>> A
array([1, 2, 3])

>>> A = np.array([[1, 2, 3], [4, 5, 6]])
>>> B = [[4, 5, 6], [7, 8, 9]]
>>> np.copyto(A, B)
>>> A
array([[4, 5, 6],
       [7, 8, 9]])
```

7.5.2 Get the shape of an array: numpy.shape

npm.**shape**(*a*)

Return the shape of an array.

See https://numpy.org/doc/stable/reference/generated/numpy.shape.html#numpy.shape for details

```
>>> import numpy as np; from xlcalcnet import mpm, dpm

>>> np.shape(np.eye(3))
(3, 3)
>>> np.shape([[1, 3]])
(1, 2)
>>> np.shape([0])
(1,)
>>> np.shape(0)
()

>>> a = np.array([(1, 2), (3, 4), (5, 6)], dtype=[('x', 'i4'), ('y', 'i4')])
>>> np.shape(a)
(3,)
>>> a.shape
(3,)
```

7.5.3 Reshape an array without changing its data: numpy.reshape

npm.**reshape**(*a*, */ (Positional-only parameter separator (PEP 570))*, *shape=None*, *order='C'*, ***, *newshape=None*, *copy=None*)

Gives a new shape to an array without changing its data.

See https://numpy.org/doc/stable/reference/generated/numpy.reshape.html#numpy.reshape for details

It is not always possible to change the shape of an array without copying the data.

The order keyword gives the index ordering both for fetching the values from a, and then placing the values into the output array. For example, let's say you have an array:

```
>>> import numpy as np; from xlcalcnet import mpm, dpm

>>> a = np.arange(6).reshape((3, 2))
>>> a
array([[0, 1],
       [2, 3],
       [4, 5]])
```

You can think of reshaping as first raveling the array (using the given index order), then inserting the elements from the raveled array into the new array using the same kind of index ordering as was used for the raveling.

```
>>> np.reshape(a, (2, 3)) # C-like index ordering
array([[0, 1, 2],
       [3, 4, 5]])
>>> np.reshape(np.ravel(a), (2, 3)) # equivalent to C ravel then C reshape
array([[0, 1, 2],
       [3, 4, 5]])
>>> np.reshape(a, (2, 3), order='F') # Fortran-like index ordering
array([[0, 4, 3],
       [2, 1, 5]])
>>> np.reshape(np.ravel(a, order='F'), (2, 3), order='F')
array([[0, 4, 3],
       [2, 1, 5]])
```

Additional examples:

```
>>> import numpy as np; from xlcalcnet import mpm, dpm

>>> a = np.array([[1,2,3], [4,5,6]])
>>> np.reshape(a, 6)
array([1, 2, 3, 4, 5, 6])
>>> np.reshape(a, 6, order='F')
array([1, 4, 2, 5, 3, 6])

>>> np.reshape(a, (3,-1))       # the unspecified value is inferred to be 2
array([[1, 2],
       [3, 4],
       [5, 6]])
```

7.5.4 Get a contiguous flattened array: numpy.ravel

npm.**ravel**(*a*, *order='C'*)

Return a contiguous flattened array.

See https://numpy.org/doc/stable/reference/generated/numpy.ravel.html#numpy.ravel for details

A 1-D array, containing the elements of the input, is returned. A copy is made only if needed.

As of NumPy 1.10, the returned array will have the same type as the input array. (for example, a masked array will be returned for a masked array input)

It is equivalent to reshape(-1, order=order).

```
>>> import numpy as np; from xlcalcnet import mpm, dpm

>>> x = np.array([[1, 2, 3], [4, 5, 6]])
>>> np.ravel(x)
array([1, 2, 3, 4, 5, 6])

>>> x.reshape(-1)
```

(continues on next page)

(continued from previous page)

```
array([1, 2, 3, 4, 5, 6])

>>> np.ravel(x, order='F')
array([1, 4, 2, 5, 3, 6])
```

When order is 'A', it will preserve the array's 'C' or 'F' ordering:

```
>>> np.ravel(x.T)
array([1, 4, 2, 5, 3, 6])
>>> np.ravel(x.T, order='A')
array([1, 2, 3, 4, 5, 6])
```

When order is 'K', it will preserve orderings that are neither 'C' nor 'F', but won't reverse axes:

```
>>> import numpy as np; from xlcalcnet import mpm, dpm

>>> a = np.arange(3)[::-1]; a
array([2, 1, 0])
>>> a.ravel(order='C')
array([2, 1, 0])
>>> a.ravel(order='K')
array([2, 1, 0])

>>> a = np.arange(12).reshape(2,3,2).swapaxes(1,2); a
array([[[ 0,  2,  4], [ 1,  3,  5]], [[ 6,  8, 10], [ 7,  9, 11]]])
>>> a.ravel(order='C')
array([ 0,  2,  4,  1,  3,  5,  6,  8, 10,  7,  9, 11])
>>> a.ravel(order='K')
array([ 0,  1,  2,  3,  4,  5,  6,  7,  8,  9, 10, 11])
```

7.5.5 1-D iterator over the array: ndarry.flat

`ndarry.flat()`

A 1-D iterator over the array.

See https://numpy.org/doc/stable/reference/generated/numpy.ndarray.flat.html#numpy.ndarray.flat for details.

This is a numpy.flatiter instance, which acts similarly to, but is not a subclass of, Python's built-in iterator object.

```
>>> import numpy as np; from xlcalcnet import mpm, dpm

>>> x = np.arange(1, 7).reshape(2, 3)
>>> x
array([[1, 2, 3],
       [4, 5, 6]])
>>> x.flat[3]
4
>>> x.T
array([[1, 4],
       [2, 5],
       [3, 6]])
>>> x.T.flat[3]
5
>>> type(x.flat)
<class 'numpy.flatiter'>
```

An assignment example:

```
>>> x.flat = 3; x
array([[3, 3, 3],
       [3, 3, 3]])
>>> x.flat[[1,4]] = 1; x
```

(continues on next page)

(continued from previous page)

```
array([[3, 1, 3],
       [3, 1, 3]])
```

7.5.6 Get a copy of the array collapsed into one dimension: ndarry.flatten

ndarry.**flatten**(*order='C'*)

Return a copy of the array collapsed into one dimension.

See https://numpy.org/doc/stable/reference/generated/numpy.ndarray.flatten.html#numpy.ndarray.flatten for details.

```
>>> import numpy as np; from xlcalcnet import mpm, dpm

>>> a = np.array([[1,2], [3,4]])
>>> a.flatten()
array([1, 2, 3, 4])
>>> a.flatten('F')
array([1, 3, 2, 4])
```

7.6 Numpy array manipulation: Transpose-like operations

7.6.1 Move axes of an array to new positions: numpy.flatten

npm.**moveaxis**(*a*, *source*, *destination*)

Move axes of an array to new positions. Other axes remain in their original order.

See https://numpy.org/doc/stable/reference/generated/numpy.moveaxis.html#numpy.moveaxis for details.

```
>>> import numpy as np; from xlcalcnet import mpm, dpm

>>> x = np.zeros((3, 4, 5))
>>> np.moveaxis(x, 0, -1).shape
(4, 5, 3)
>>> np.moveaxis(x, -1, 0).shape
(5, 3, 4)
```

These all achieve the same result:

```
>>> np.transpose(x).shape
(5, 4, 3)
>>> np.swapaxes(x, 0, -1).shape
(5, 4, 3)
>>> np.moveaxis(x, [0, 1], [-1, -2]).shape
(5, 4, 3)
>>> np.moveaxis(x, [0, 1, 2], [-1, -2, -3]).shape
(5, 4, 3)
```

7.6.2 Interchange two axes of an array: numpy.swapaxes

npm.**swapaxes**(*a*, *axis1*, *axis2*)

Interchange two axes of an array.

See https://numpy.org/doc/stable/reference/generated/numpy.swapaxes.html#numpy.swapaxes for details.

```
>>> import numpy as np; from xlcalcnet import mpm, dpm

>>> x = np.array([[1,2,3]])
>>> np.swapaxes(x,0,1)
array([[1],
       [2],
       [3]])

>>> x = np.array([[[0,1],[2,3]],[[4,5],[6,7]]])
>>> x
array([[[0, 1],
        [2, 3]],
       [[4, 5],
        [6, 7]]])

>>> np.swapaxes(x,0,2)
array([[[0, 4],
        [2, 6]],
       [[1, 5],
        [3, 7]]])
```

7.6.3 Get an array with axes transposed: numpy.transpose

npm.**transpose**(*a*, *axes=None*)

Returns an array with axes transposed.

See https://numpy.org/doc/stable/reference/generated/numpy.transpose.html#numpy.transpose for details.

For a 1-D array, this returns an unchanged view of the original array, as a transposed vector is simply the same vector. To convert a 1-D array into a 2-D column vector, an additional dimension must be added, e.g., np.atleast2d(a).T achieves this, as does a[:, np.newaxis]. For a 2-D array, this is the standard matrix transpose. For an n-D array, if axes are given, their order indicates how the axes are permuted (see Examples). If axes are not provided, then transpose(a).shape == a.shape[::-1].

```
>>> import numpy as np; from xlcalcnet import mpm, dpm

>>> a = np.array([[1, 2], [3, 4]])
a
array([[1, 2],
       [3, 4]])
>>> np.transpose(a)
array([[1, 3],
       [2, 4]])

>>> a = np.array([1, 2, 3, 4])
>>> a
array([1, 2, 3, 4])
>>> np.transpose(a)
array([1, 2, 3, 4])

>>> a = np.ones((1, 2, 3))
>>> np.transpose(a, (1, 0, 2)).shape
(2, 1, 3)

>>> a = np.ones((2, 3, 4, 5))
>>> np.transpose(a).shape
(5, 4, 3, 2)
```

ndarray.T

https://numpy.org/doc/stable/reference/generated/numpy.ndarray.T.html#numpy.ndarray.T

View of the transposed array. Same as self.transpose().

```
>>> import numpy as np; from xlcalcnet import mpm, dpm

>>> a = np.array([[1, 2], [3, 4]])
a
array([[1, 2],
       [3, 4]])
>>> a.T
array([[1, 3],
       [2, 4]])

>>> a = np.array([1, 2, 3, 4])
>>> a
array([1, 2, 3, 4])
>>> a.T
array([1, 2, 3, 4])
```

7.7 Numpy array manipulation: Changing number of dimensions

7.7.1 Convert inputs to arrays with at least one dimension: numpy.atleast_1d

npm.**atleast_1d**(**arys*)

Convert inputs to arrays with at least one dimension.

See https://numpy.org/doc/stable/reference/generated/numpy.atleast_1d.html#numpy.atleast_1d for details

Scalar inputs are converted to 1-dimensional arrays, whilst higher-dimensional inputs are preserved.

```
>>> import numpy as np; from xlcalcnet import mpm, dpm

>>> np.atleast_1d(1.0)
array([1.])

>>> x = np.arange(9.0).reshape(3,3)
>>> np.atleast_1d(x)
array([[0., 1., 2.],
       [3., 4., 5.],
       [6., 7., 8.]])
>>> np.atleast_1d(x) is x
True

>>> np.atleast_1d(1, [3, 4])
[array([1]), array([3, 4])]
```

7.7.2 Convert inputs to arrays with at least two dimensions: numpy.atleast_2d

npm.**atleast_2d**(**arys*)

Convert inputs as arrays with at least two dimensions.

See https://numpy.org/doc/stable/reference/generated/numpy.atleast_2d.html#numpy.atleast_2d for details

```
>>> import numpy as np; from xlcalcnet import mpm, dpm

>>> np.atleast_2d(3.0)
array([[3.]])

>>> x = np.arange(3.0)
>>> np.atleast_2d(x)
array([[0., 1., 2.]])
>>> np.atleast_2d(x).base is x
True

>>> np.atleast_2d(1, [1, 2], [[1, 2]])
[array([[1]]), array([[1, 2]]), array([[1, 2]])]
```

7.7.3 Convert inputs to arrays with at least two dimensions: numpy.atleast_3d

npm.**atleast_3d**(**arys*)

Convert inputs as arrays with at least three dimensions.

See https://numpy.org/doc/stable/reference/generated/numpy.atleast_3d.html#numpy.atleast_3d for details.

```
>>> import numpy as np; from xlcalcnet import mpm, dpm

>>> np.atleast_3d(3.0)
array([[[3.]]])

>>> x = np.arange(3.0)
```

(continues on next page)

(continued from previous page)

```
>>> np.atleast_3d(x).shape
(1, 3, 1)

>>> x = np.arange(12.0).reshape(4,3)
>>> np.atleast_3d(x).shape
(4, 3, 1)
>>> np.atleast_3d(x).base is x.base  # x is a reshape, so not base itself
True

for arr in np.atleast_3d([1, 2], [[1, 2]], [[[1, 2]]]): print(arr, arr.shape)
[[[1]
  [2]]] (1, 2, 1)
[[[1]
  [2]]] (1, 2, 1)
[[[1 2]]] (1, 1, 2)
```

7.7.4 Broadcast an array to a new shape: numpy.broadcast_to

npm.**broadcast_to**(*array*, *shape*, *subok=False*)

Broadcast an array to a new shape.

See https://numpy.org/doc/stable/reference/generated/numpy.broadcast_to.html#numpy.broadcast_to for details.

```
>>> import numpy as np; from xlcalcnet import mpm, dpm

>>> x = np.array([1, 2, 3])
>>> np.broadcast_to(x, (3, 3))
array([[1, 2, 3],
       [1, 2, 3],
       [1, 2, 3]])
```

7.7.5 Broadcast any number of arrays against each other: numpy.broadcast_arrays

npm.**broadcast_arrays**(**args*, *subok=False*)

Broadcast any number of arrays against each other.

See https://numpy.org/doc/stable/reference/generated/numpy.broadcast_arrays.html#numpy.broadcast_arrays for details.

```
>>> import numpy as np; from xlcalcnet import mpm, dpm

>>> x = np.array([[1,2,3]])
>>> y = np.array([[4],[5]])
>>> np.broadcast_arrays(x, y)
[array([[1, 2, 3],
       [1, 2, 3]]), array([[4, 4, 4],
       [5, 5, 5]])]
```

Here is a useful idiom for getting contiguous copies instead of non-contiguous views.

```
>>> [np.array(a) for a in np.broadcast_arrays(x, y)]
[array([[1, 2, 3],
       [1, 2, 3]]), array([[4, 4, 4],
       [5, 5, 5]])]
```

7.7.6 Expand the shape of an array: numpy.expand_dims

npm.**expand_dims**(*a*, *axis*)

Expand the shape of an array. Insert a new axis that will appear at the axis position in the expanded array shape.

See https://numpy.org/doc/stable/reference/generated/numpy.expand_dims.html#numpy.expand_dims for details.

```
>>> import numpy as np; from xlcalcnet import mpm, dpm

>>> x = np.array([1, 2])
>>> x.shape
(2,)
```

The following is equivalent to `x[np.newaxis, :]` or `x[np.newaxis]`:

```
>>> y = np.expand_dims(x, axis=0)
>>> y
array([[1, 2]])
>>> y.shape
(1, 2)
```

The following is equivalent to `x[:, np.newaxis]`:

```
>>> y = np.expand_dims(x, axis=1)
>>> y
array([[1],
       [2]])
>>> y.shape
(2, 1)
```

`axis` may also be a tuple:

```
>>> y = np.expand_dims(x, axis=(0, 1))
>>> y
array([[[1, 2]]])
>>> y = np.expand_dims(x, axis=(2, 0))
>>> y
array([[[1],
        [2]]])
```

Note that some examples may use `None` instead of `np.newaxis`. These are the same objects:

```
>>> np.newaxis is None
True
```

7.7.7 Remove axes of length one from an array: numpy.squeeze

npm.**squeeze**(*a*, *axis=None*)

Remove axes of length one from a.

https://numpy.org/doc/stable/reference/generated/numpy.squeeze.html#numpy.squeeze

```
>>> import numpy as np; from xlcalcnet import mpm, dpm

>>> x = np.array([[[0], [1], [2]]])
>>> x.shape
(1, 3, 1)
>>> np.squeeze(x).shape
(3,)
>>> np.squeeze(x, axis=0).shape
(3, 1)
>>> np.squeeze(x, axis=1).shape
Traceback (most recent call last):
...
ValueError: cannot select an axis to squeeze out which has size not equal to one

>>> np.squeeze(x, axis=2).shape
(1, 3)
>>> x = np.array([[1234]])
```

(continues on next page)

(continued from previous page)

```
>>> x.shape
(1, 1)
>>> np.squeeze(x)
array(1234)  # 0d array
>>> np.squeeze(x).shape
()
>>> np.squeeze(x)[()]
1234
```

7.8 Numpy array manipulation: Joining arrays

7.8.1 Join a sequence of arrays along an existing axis: numpy.concatenate

npm.**concatenate**(*(a1, a2, ...)*, *axis=0*, *out=None*, *dtype=None*, *casting="same_kind"*)

Join a sequence of arrays along an existing axis.

See https://numpy.org/doc/stable/reference/generated/numpy.concatenate.html#numpy.concatenate for details.

When one or more of the arrays to be concatenated is a MaskedArray, this function will return a MaskedArray object instead of an ndarray, but the input masks are not preserved. In cases where a MaskedArray is expected as input, use the ma.concatenate function from the masked array module instead.

```
>>> import numpy as np; from xlcalcnet import mpm, dpm

>>> a = np.array([[1, 2], [3, 4]])
>>> b = np.array([[5, 6]])
>>> np.concatenate((a, b), axis=0)
array([[1, 2],
       [3, 4],
       [5, 6]])
>>> np.concatenate((a, b.T), axis=1)
array([[1, 2, 5],
       [3, 4, 6]])
>>> np.concatenate((a, b), axis=None)
array([1, 2, 3, 4, 5, 6])
```

This function will not preserve masking of MaskedArray inputs.

```
>>> a = np.ma.arange(3)
>>> a[1] = np.ma.masked
>>> b = np.arange(2, 5)
>>> a
masked_array(data=[0, --, 2],
             mask=[False,  True, False],
       fill_value=999999)
>>> b
array([2, 3, 4])
>>> np.concatenate([a, b])
masked_array(data=[0, 1, 2, 2, 3, 4],
             mask=False,
       fill_value=999999)
>>> np.ma.concatenate([a, b])
masked_array(data=[0, --, 2, 2, 3, 4],
             mask=[False,  True, False, False, False, False],
       fill_value=999999)
```

7.8.2 Join a sequence of arrays along an existing axis: numpy.stack

npm.**stack**(*arrays*, *axis=0*, *out=None*, *, *dtype=None*, *casting='same_kind'*)

Join a sequence of arrays along a new axis.

See https://numpy.org/doc/stable/reference/generated/numpy.stack.html#numpy.stack for details.

The axis parameter specifies the index of the new axis in the dimensions of the result. For example, if axis=0 it will be the first dimension and if axis=-1 it will be the last dimension.

```
>>> import numpy as np; from xlcalcnet import mpm, dpm

>>> arrays = [np.random.randn(3, 4) for _ in range(10)]
>>> np.stack(arrays, axis=0).shape
(10, 3, 4)
```

(continues on next page)

(continued from previous page)

```
>>> np.stack(arrays, axis=1).shape
(3, 10, 4)

>>> np.stack(arrays, axis=2).shape
(3, 4, 10)

>>> a = np.array([1, 2, 3])
>>> b = np.array([4, 5, 6])
>>> np.stack((a, b))
array([[1, 2, 3],
       [4, 5, 6]])

>>> np.stack((a, b), axis=-1)
array([[1, 4],
       [2, 5],
       [3, 6]])
```

7.8.3 Assemble an nd-array from nested lists of blocks: numpy.block

npm.block(*arrays*)

Assemble an nd-array from nested lists of blocks.

See https://numpy.org/doc/stable/reference/generated/numpy.block.html#numpy.block for details.

Blocks in the innermost lists are concatenated (see concatenate) along the last dimension (-1), then these are concatenated along the second-last dimension (-2), and so on until the outermost list is reached.

Blocks can be of any dimension, but will not be broadcasted using the normal rules. Instead, leading axes of size 1 are inserted, to make block.ndim the same for all blocks. This is primarily useful for working with scalars, and means that code like np.block([v, 1]) is valid, where v.ndim == 1.

When the nested list is two levels deep, this allows block matrices to be constructed from their components.

When called with only scalars, `np.block` is equivalent to an ndarray call. So `np.block([[1, 2], [3, 4]])` is equivalent to `np.array([[1, 2], [3, 4]])`.

This function does not enforce that the blocks lie on a fixed grid. `np.block([[a, b], [c, d]])` is not restricted to arrays of the form:

```
AAAbb
AAAbb
cccDD
```

But is also allowed to produce, for some a, b, c, d:

```
AAAbb
AAAbb
cDDDD
```

Since concatenation happens along the last axis first, block is not capable of producing the following directly:

```
AAAbb
cccbb
cccDD
```

```
>>> import numpy as np; from xlcalcnet import mpm, dpm

>>> matA = np.eye(2) * 2
>>> B = np.eye(3) * 3
>>> np.block([
```

(continues on next page)

(continued from previous page)

```
    [matA,               np.zeros((2, 3))],
    [np.ones((3, 2)), B               ]
])
array([[2., 0., 0., 0., 0.],
       [0., 2., 0., 0., 0.],
       [1., 1., 3., 0., 0.],
       [1., 1., 0., 3., 0.],
       [1., 1., 0., 0., 3.]])
```

With a list of depth 1, block can be used as hstack

```
>>> np.block([1, 2, 3])              # hstack([1, 2, 3])
array([1, 2, 3])

>>> a = np.array([1, 2, 3])
>>> b = np.array([4, 5, 6])
>>> np.block([a, b, 10])             # hstack([a, b, 10])
array([ 1,  2,  3,  4,  5,  6, 10])

>>> A = np.ones((2, 2), int)
>>> B = 2 * A
>>> np.block([A, B])                 # hstack([A, B])
array([[1, 1, 2, 2],
       [1, 1, 2, 2]])
```

With a list of depth 2, block can be used in place of vstack:

```
>>> a = np.array([1, 2, 3])
>>> b = np.array([4, 5, 6])
>>> np.block([[a], [b]])             # vstack([a, b])
array([[1, 2, 3],
       [4, 5, 6]])

>>> A = np.ones((2, 2), int)
>>> B = 2 * A
>>> np.block([[A], [B]])             # vstack([A, B])
array([[1, 1],
       [1, 1],
       [2, 2],
       [2, 2]])
```

It can also be used in places of atleast_1d and atleast_2d

```
>>> a = np.array(0)
>>> b = np.array([1])
>>> np.block([a])                    # atleast_1d(a)
array([0])
>>> np.block([b])                    # atleast_1d(b)
array([1])

>>> np.block([[a]])                  # atleast_2d(a)
array([[0]])
np.block([[b]])                   # atleast_2d(b)
array([[1]])
```

7.8.4 Stack arrays in sequence vertically (row wise): numpy.vstack

npm.**vstack**(*tup*, *, *dtype=None*, *casting='same_kind'*)

Stack arrays in sequence vertically (row wise).

See https://numpy.org/doc/stable/reference/generated/numpy.vstack.html#numpy.vstack for details.

This is equivalent to concatenation along the first axis after 1-D arrays of shape (N,) have been reshaped to (1,N). Rebuilds arrays divided by vsplit.

This function makes most sense for arrays with up to 3 dimensions. For instance, for pixel-data with a height (first axis), width (second axis), and r/g/b channels (third axis). The functions concatenate, stack and block provide more general stacking and concatenation operations.

```
>>> a = np.array([1, 2, 3])
>>> b = np.array([4, 5, 6])
>>> np.vstack((a,b))
array([[1, 2, 3],
       [4, 5, 6]])

>>> a = np.array([[1], [2], [3]])
>>> b = np.array([[4], [5], [6]])
>>> np.vstack((a,b))
array([[1],
       [2],
       [3],
       [4],
       [5],
       [6]])
```

7.8.5 Stack arrays in sequence horizontally (column wise): numpy.hstack

npm.**hstack**(*tup*, ***, *dtype=None*, *casting='same_kind'*)

Stack arrays in sequence horizontally (column wise).

See https://numpy.org/doc/stable/reference/generated/numpy.hstack.html#numpy.hstack for details.

This is equivalent to concatenation along the second axis, except for 1-D arrays where it concatenates along the first axis. Rebuilds arrays divided by hsplit.

This function makes most sense for arrays with up to 3 dimensions. For instance, for pixel-data with a height (first axis), width (second axis), and r/g/b channels (third axis). The functions concatenate, stack and block provide more general stacking and concatenation operations.

```
>>> a = np.array((1,2,3))
>>> b = np.array((4,5,6))
>>> np.hstack((a,b))
array([1, 2, 3, 4, 5, 6])

>>> a = np.array([[1],[2],[3]])
>>> b = np.array([[4],[5],[6]])
>>> np.hstack((a,b))
array([[1, 4],
       [2, 5],
       [3, 6]])
```

7.8.6 Stack arrays in sequence depth wise (along third axis): numpy.dstack

npm.**dstack**(*tup*)

Stack arrays in sequence depth wise (along third axis).

https://numpy.org/doc/stable/reference/generated/numpy.dstack.html#numpy.dstack

This is equivalent to concatenation along the third axis after 2-D arrays of shape (M,N) have been reshaped to (M,N,1) and 1-D arrays of shape (N,) have been reshaped to (1,N,1). Rebuilds arrays divided by dsplit.

This function makes most sense for arrays with up to 3 dimensions. For instance, for pixel-data with a height (first axis), width (second axis), and r/g/b channels (third axis). The functions concatenate, stack and block provide more general stacking and concatenation operations.

```
>>> a = np.array((1,2,3))
>>> b = np.array((2,3,4))
>>> np.dstack((a,b))
array([[[1, 2],
        [2, 3],
        [3, 4]]])

>>> a = np.array([[1],[2],[3]])
>>> b = np.array([[2],[3],[4]])
>>> np.dstack((a,b))
array([[[1, 2]],
       [[2, 3]],
       [[3, 4]]])
```

7.8.7 Stack 1-D arrays as columns into a 2-D array: numpy.column_stack

npm.**column_stack**(*tup*)

Stack 1-D arrays as columns into a 2-D array.

See https://numpy.org/doc/stable/reference/generated/numpy.column_stack.html#numpy.column_stack for details.

Take a sequence of 1-D arrays and stack them as columns to make a single 2-D array. 2-D arrays are stacked as-is, just like with hstack. 1-D arrays are turned into 2-D columns first.

```
>>> a = np.array((1,2,3))
>>> b = np.array((2,3,4))
>>> np.column_stack((a,b))
array([[1, 2],
        [2, 3],
        [3, 4]])
```

7.9 Numpy array manipulation: Splitting and tiling arrays

7.9.1 Split an array into multiple sub-arrays as views: numpy.split

npm.**split**(*ary*, *indices_or_sections*, *axis=0*)

Split an array into multiple sub-arrays as views.

See https://numpy.org/doc/stable/reference/generated/numpy.split.html#numpy.split for details.

```
>>> x = np.arange(9.0)
>>> np.split(x, 3)
[array([0.,  1.,  2.]), array([3.,  4.,  5.]), array([6.,  7.,  8.])]

>>> x = np.arange(8.0)
>>> np.split(x, [3, 5, 6, 10])
[array([0.,  1.,  2.]),
 array([3.,  4.]),
 array([5.]),
 array([6.,  7.]),
 array([], dtype=float64)]
```

7.9.2 Split an array into multiple sub-arrays: numpy.array_split

npm.**array_split**(*ary*, *indices_or_sections*, *axis=0*)

Split an array into multiple sub-arrays.

See https://numpy.org/doc/stable/reference/generated/numpy.array_split.html#numpy.array_split for details.

Please refer to the split documentation. The only difference between these functions is that array_split allows indices_or_sections to be an integer that does not equally divide the axis. For an array of length l that should be split into n sections, it returns l % n sub-arrays of size l//n + 1 and the rest of size l//n.

```
>>> x = np.arange(8.0)
>>> np.array_split(x, 3)
[array([0.,  1.,  2.]), array([3.,  4.,  5.]), array([6.,  7.])]

>>> x = np.arange(9)
>>> np.array_split(x, 4)
[array([0, 1, 2]), array([3, 4]), array([5, 6]), array([7, 8])]
```

7.9.3 Split array into multiple sub-arrays along the 3rd axis (depth): numpy.dsplit

npm.**dsplit**(*ary*, *indices_or_sections*)

Split array into multiple sub-arrays along the 3rd axis (depth).

See https://numpy.org/doc/stable/reference/generated/numpy.dsplit.html#numpy.dsplit for details.

Please refer to the split documentation. dsplit is equivalent to split with axis=2, the array is always split along the third axis provided the array dimension is greater than or equal to 3.

```
>>> x = np.arange(16.0).reshape(2, 2, 4)
>>> x
array([[[ 0.,   1.,   2.,   3.],
        [ 4.,   5.,   6.,   7.]],
       [[ 8.,   9.,  10.,  11.],
        [12.,  13.,  14.,  15.]]])

>>> np.dsplit(x, 2)
[array([[[ 0.,  1.],
        [ 4.,  5.]],
```

(continues on next page)

(continued from previous page)

```
       [[ 8.,  9.],
        [12., 13.]]]), array([[[ 2.,  3.],
        [ 6.,  7.]],
       [[10., 11.],
        [14., 15.]]])]

>>> np.dsplit(x, np.array([3, 6]))
[array([[[ 0.,  1.,  2.],
        [ 4.,  5.,  6.]],
       [[ 8.,  9., 10.],
        [12., 13., 14.]]]),
 array([[[ 3.],
        [ 7.]],
       [[11.],
        [15.]]]),
array([], shape=(2, 2, 0), dtype=float64)]
```

7.9.4 Split an array into multiple sub-arrays horizontally (column-wise): numpy.hsplit

npm.**hsplit**(*ary*, *indices_or_sections*)

Split an array into multiple sub-arrays horizontally (column-wise).

See https://numpy.org/doc/stable/reference/generated/numpy.hsplit.html#numpy.hsplit for details.

Please refer to the split documentation. hsplit is equivalent to split with axis=1, the array is always split along the second axis except for 1-D arrays, where it is split at axis=0.

```
>>> x = np.arange(16.0).reshape(4, 4)
>>> x
array([[ 0.,  1.,  2.,  3.],
       [ 4.,  5.,  6.,  7.],
       [ 8.,  9., 10., 11.],
       [12., 13., 14., 15.]])

>>> np.hsplit(x, 2)
[array([[ 0.,  1.],
       [ 4.,  5.],
       [ 8.,  9.],
       [12., 13.]]),
 array([[ 2.,  3.],
       [ 6.,  7.],
       [10., 11.],
       [14., 15.]])]

>>> np.hsplit(x, np.array([3, 6]))
[array([[ 0.,  1.,  2.],
       [ 4.,  5.,  6.],
       [ 8.,  9., 10.],
       [12., 13., 14.]]),
 array([[ 3.],
       [ 7.],
       [11.],
       [15.]]),
 array([], shape=(4, 0), dtype=float64)]
```

With a higher dimensional array the split is still along the second axis.

```
>>> x = np.arange(8.0).reshape(2, 2, 2)
>>> x
array([[[0.,  1.],
        [2.,  3.]],
       [[4.,  5.],
        [6.,  7.]]])
```

(continues on next page)

(continued from previous page)

```
>>> np.hsplit(x, 2)
[array([[[0.,  1.]],
       [[4.,  5.]]]),
 array([[[2.,  3.]],
       [[6.,  7.]]])]
```

With a 1-D array, the split is along axis 0.

```
>>> x = np.array([0, 1, 2, 3, 4, 5])
>>> np.hsplit(x, 2)
[array([0, 1, 2]), array([3, 4, 5])]
```

7.9.5 Split an array into multiple sub-arrays vertically (row-wise): numpy.vsplit

npm.**vsplit**(*ary*, *indices_or_sections*)

Split an array into multiple sub-arrays vertically (row-wise).

See https://numpy.org/doc/stable/reference/generated/numpy.vsplit.html#numpy.vsplit for details.

Please refer to the split documentation. vsplit is equivalent to split with axis=0 (default), the array is always split along the first axis regardless of the array dimension.

```
>>> x = np.arange(16.0).reshape(4, 4)
>>> x
array([[ 0.,   1.,   2.,   3.],
       [ 4.,   5.,   6.,   7.],
       [ 8.,   9.,  10.,  11.],
       [12.,  13.,  14.,  15.]])

>>> np.vsplit(x, 2)
[array([[0., 1., 2., 3.],
       [4., 5., 6., 7.]]), array([[ 8.,  9., 10., 11.],
       [12., 13., 14., 15.]])]

>>> np.vsplit(x, np.array([3, 6]))
[array([[ 0.,  1.,  2.,  3.],
       [ 4.,  5.,  6.,  7.],
       [ 8.,  9., 10., 11.]]), array([[12., 13., 14., 15.]]), array([], shape=(0, 4), dtype=float64)]
```

With a higher dimensional array the split is still along the first axis.

```
>>> x = np.arange(8.0).reshape(2, 2, 2)
>>> x
array([[[0.,  1.],
        [2.,  3.]],
       [[4.,  5.],
        [6.,  7.]]])

>>> np.vsplit(x, 2)
[array([[[0., 1.],
        [2., 3.]]]), array([[[4., 5.],
        [6., 7.]]])]
```

7.9.6 Construct an array by repeating a given array: numpy.tile

npm.**tile**(*A*, *reps*)

Construct an array by repeating A the number of times given by reps.

See https://numpy.org/doc/stable/reference/generated/numpy.tile.html#numpy.tile for details.

If reps has length d, the result will have dimension of max(d, A.ndim).

If A.ndim < d, A is promoted to be d-dimensional by prepending new axes. So a shape (3,) array is promoted to (1, 3) for 2-D replication, or shape (1, 1, 3) for 3-D replication. If this is not the desired behavior, promote A to d-dimensions manually before calling this function.

If A.ndim > d, reps is promoted to A.ndim by pre-pending 1's to it. Thus for an A of shape (2, 3, 4, 5), a reps of (2, 2) is treated as (1, 1, 2, 2).

Note : Although tile may be used for broadcasting, it is strongly recommended to use numpy's broadcasting operations and functions.

```
>>> a = np.array([0, 1, 2])
>>> np.tile(a, 2)
array([0, 1, 2, 0, 1, 2])
>>> np.tile(a, (2, 2))
array([[0, 1, 2, 0, 1, 2],
       [0, 1, 2, 0, 1, 2]])
>>> np.tile(a, (2, 1, 2))
array([[[0, 1, 2, 0, 1, 2]],
       [[0, 1, 2, 0, 1, 2]]])

>>> b = np.array([[1, 2], [3, 4]])
>>> np.tile(b, 2)
array([[1, 2, 1, 2],
       [3, 4, 3, 4]])
>>> np.tile(b, (2, 1))
array([[1, 2],
       [3, 4],
       [1, 2],
       [3, 4]])

>>> c = np.array([1,2,3,4])
>>> np.tile(c,(4,1))
array([[1, 2, 3, 4],
       [1, 2, 3, 4],
       [1, 2, 3, 4],
       [1, 2, 3, 4]])
```

7.9.7 Repeat each element of an array after themselves: numpy.repeat

npm.**repeat**(*a*, *repeats*, *axis=None*)

Repeat each element of an array after themselves.

See https://numpy.org/doc/stable/reference/generated/numpy.repeat.html#numpy.repeat for details.

```
>>> np.repeat(3, 4)
array([3, 3, 3, 3])

>>> x = np.array([[1,2],[3,4]])
>>> np.repeat(x, 2)
array([1, 1, 2, 2, 3, 3, 4, 4])

>>> np.repeat(x, 3, axis=1)
array([[1, 1, 1, 2, 2, 2],
       [3, 3, 3, 4, 4, 4]])

>>> np.repeat(x, [1, 2], axis=0)
array([[1, 2],
       [3, 4],
       [3, 4]])
```

7.10 Numpy array manipulation: Adding and removing elements

7.10.1 Pad an array: numpy.pad

npm.**pad**(*array*, *pad_width*, *mode='constant'*, ***kwargs*)

Pad an array.

See https://numpy.org/doc/stable/reference/generated/numpy.pad.html for details.

For an array with rank greater than 1, some of the padding of later axes is calculated from padding of previous axes. This is easiest to think about with a rank 2 array where the corners of the padded array are calculated by using padded values from the first axis.

```
>>> a = [1, 2, 3, 4, 5]
np.pad(a, (2, 3), 'constant', constant_values=(4, 6))
array([4, 4, 1, ..., 6, 6, 6])

>>> np.pad(a, (2, 3), 'edge')
array([1, 1, 1, ..., 5, 5, 5])

>>> np.pad(a, (2, 3), 'linear_ramp', end_values=(5, -4))
array([ 5,  3,  1,  2,  3,  4,  5,  2, -1, -4])

>>> np.pad(a, (2,), 'maximum')
array([5, 5, 1, 2, 3, 4, 5, 5, 5])

>>> np.pad(a, (2,), 'mean')
array([3, 3, 1, 2, 3, 4, 5, 3, 3])

>>> np.pad(a, (2,), 'median')
array([3, 3, 1, 2, 3, 4, 5, 3, 3])

>>> a = [[1, 2], [3, 4]]
>>> np.pad(a, ((3, 2), (2, 3)), 'minimum')
array([[1, 1, 1, 2, 1, 1, 1],
       [1, 1, 1, 2, 1, 1, 1],
       [1, 1, 1, 2, 1, 1, 1],
       [1, 1, 1, 2, 1, 1, 1],
       [3, 3, 3, 4, 3, 3, 3],
       [1, 1, 1, 2, 1, 1, 1],
       [1, 1, 1, 2, 1, 1, 1]])

>>> a = [1, 2, 3, 4, 5]
>>> np.pad(a, (2, 3), 'reflect')
array([3, 2, 1, 2, 3, 4, 5, 4, 3, 2])

>>> np.pad(a, (2, 3), 'reflect', reflect_type='odd')
array([-1,  0,  1,  2,  3,  4,  5,  6,  7,  8])

>>> np.pad(a, (2, 3), 'symmetric')
array([2, 1, 1, 2, 3, 4, 5, 5, 4, 3])

>>> np.pad(a, (2, 3), 'symmetric', reflect_type='odd')
array([0, 1, 1, 2, 3, 4, 5, 5, 6, 7])

>>> np.pad(a, (2, 3), 'wrap')
array([4, 5, 1, 2, 3, 4, 5, 1, 2, 3])

>>> def pad_with(vector, pad_width, iaxis, kwargs):
        pad_value = kwargs.get('padder', 10)
        vector[:pad_width[0]] = pad_value
        vector[-pad_width[1]:] = pad_value
>>> a = np.arange(6)
>>> a = a.reshape((2, 3))
>>> np.pad(a, 2, pad_with)
```

(continues on next page)

(continued from previous page)

```
array([[10, 10, 10, 10, 10, 10, 10],
       [10, 10, 10, 10, 10, 10, 10],
       [10, 10,  0,  1,  2, 10, 10],
       [10, 10,  3,  4,  5, 10, 10],
       [10, 10, 10, 10, 10, 10, 10],
       [10, 10, 10, 10, 10, 10, 10]])
>>> np.pad(a, 2, pad_with, padder=100)
array([[100, 100, 100, 100, 100, 100, 100],
       [100, 100, 100, 100, 100, 100, 100],
       [100, 100,   0,   1,   2, 100, 100],
       [100, 100,   3,   4,   5, 100, 100],
       [100, 100, 100, 100, 100, 100, 100],
       [100, 100, 100, 100, 100, 100, 100]])
```

7.10.2 Return a new array with sub-arrays along an axis deleted: numpy.delete

npm.**delete**(*arr*, *obj*, *axis=None*)

Return a new array with sub-arrays along an axis deleted. For a one dimensional array, this returns those entries not returned by arr[obj].

See https://numpy.org/doc/stable/reference/generated/numpy.delete.html#numpy.delete for details.

Often it is preferable to use a boolean mask. For example:

```
>>> arr = np.arange(12) + 1
>>> mask = np.ones(len(arr), dtype=bool)
>>> mask[[0,2,4]] = False
>>> result = arr[mask,...]
```

Is equivalent to `np.delete(arr, [0,2,4], axis=0)`, but allows further use of *mask*.

```
>>> arr = np.array([[1,2,3,4], [5,6,7,8], [9,10,11,12]])
>>> arr
array([[ 1,  2,  3,  4],
       [ 5,  6,  7,  8],
       [ 9, 10, 11, 12]])
>>> np.delete(arr, 1, 0)
array([[ 1,  2,  3,  4],
       [ 9, 10, 11, 12]])

>>> np.delete(arr, np.s_[::2], 1)
array([[ 2,  4],
       [ 6,  8],
       [10, 12]])
>>> np.delete(arr, [1,3,5], None)
array([ 1,  3,  5,  7,  8,  9, 10, 11, 12])
```

7.10.3 Insert values along the given axis before the given indices: numpy.insert

npm.**insert**(*arr*, *obj*, *values*, *axis=None*)

Insert values along the given axis before the given indices.

See https://numpy.org/doc/stable/reference/generated/numpy.insert.html#numpy.insert for details.

Note that for higher dimensional inserts `obj=0` behaves very different from `obj=[0]` just like `arr[:,0,:] = values` is different from `arr[:,[0],:] = values`.

```
>>> a = np.array([[1, 1], [2, 2], [3, 3]])
>>> a
array([[1, 1],
       [2, 2],
```

(continues on next page)

(continued from previous page)

```
       [3, 3]])
>>> np.insert(a, 1, 5)
array([1, 5, 1, ..., 2, 3, 3])
>>> np.insert(a, 1, 5, axis=1)
array([[1, 5, 1],
       [2, 5, 2],
       [3, 5, 3]])
```

Difference between sequence and scalars:

```
>>> np.insert(a, [1], [[1],[2],[3]], axis=1)
array([[1, 1, 1],
       [2, 2, 2],
       [3, 3, 3]])
>>> np.array_equal(np.insert(a, 1, [1, 2, 3], axis=1),
               np.insert(a, [1], [[1],[2],[3]], axis=1))
True

>>> b = a.flatten()
>>> b
array([1, 1, 2, 2, 3, 3])
>>> np.insert(b, [2, 2], [5, 6])
array([1, 1, 5, ..., 2, 3, 3])

>>> np.insert(b, slice(2, 4), [5, 6])
array([1, 1, 5, ..., 2, 3, 3])

>>> np.insert(b, [2, 2], [7.13, False]) # type casting
array([1, 1, 7, ..., 2, 3, 3])

>>> x = np.arange(8).reshape(2, 4)
>>> idx = (1, 3)
np.insert(x, idx, 999, axis=1)
array([[  0, 999,   1,   2, 999,   3],
       [  4, 999,   5,   6, 999,   7]])
```

7.10.4 Append values to the end of an array: numpy.append

npm.**append**(*arr*, *values*, *axis=None*)

Append values to the end of an array.

See https://numpy.org/doc/stable/reference/generated/numpy.append.html#numpy.append for details.

```
>>> np.np.append([1, 2, 3], [[4, 5, 6], [7, 8, 9]])
array([1, 2, 3, ..., 7, 8, 9])
```

When axis is specified, values must have the correct shape.

```
>>> np.append([[1, 2, 3], [4, 5, 6]], [[7, 8, 9]], axis=0)
array([[1, 2, 3],
       [4, 5, 6],
       [7, 8, 9]])
>>> np.append([[1, 2, 3], [4, 5, 6]], [7, 8, 9], axis=0)
Traceback (most recent call last):
    ...
ValueError: all the input arrays must have same number of dimensions, but
the array at index 0 has 2 dimension(s) and the array at index 1 has 1
dimension(s)
```

See https://numpy.org/doc/stable/reference/generated/numpy.resize.html#numpy.resize for details.

If the new array is larger than the original array, then the new array is filled with repeated copies of a. Note that this behavior is different from a.resize(new_shape) which fills with zeros instead of repeated copies of a.

When the total size of the array does not change reshape should be used. In most other cases either indexing (to reduce the size) or padding (to increase the size) may be a more appropriate solution.

Warning: This functionality does not consider axes separately, i.e. it does not apply interpolation/extrapolation. It fills the return array with the required number of elements, iterating over a in C-order, disregarding axes (and cycling back from the start if the new shape is larger). This functionality is therefore not suitable to resize images, or data where each axis represents a separate and distinct entity.

```
>>> a=np.array([[0,1],[2,3]])
>>> np.resize(a,(2,3))
array([[0, 1, 2],
       [3, 0, 1]])

>>> np.resize(a,(1,4))
array([[0, 1, 2, 3]])

>>> np.resize(a,(2,4))
array([[0, 1, 2, 3],
       [0, 1, 2, 3]])
```

7.10.5 Trim zeros from a 1-D array: numpy.trim_zeros

npm.**trim_zeros**(*filt*, *trim='fb'*, *axis=None*)

Trim the leading and/or trailing zeros from a 1-D array or sequence.

See https://numpy.org/doc/stable/reference/generated/numpy.trim_zeros.html#numpy.trim_zeros for details.

```
>>> a = np.array((0, 0, 0, 1, 2, 3, 0, 2, 1, 0))
>>> np.trim_zeros(a)
array([1, 2, 3, 0, 2, 1])
>>> np.trim_zeros(a, 'b')
array([0, 0, 0, ..., 0, 2, 1])
```

The input data type is preserved, list/tuple in means list/tuple out.

```
>>> np.trim_zeros([0, 1, 2, 0])
[1, 2]
```

7.10.6 Find the unique elements of an array: numpy.unique

npm.**unique**(*ar*, *return_index=False*, *return_inverse=False*, *return_counts=False*, *axis=None*, *, *equal_nan=True*)

Find the unique elements of an array.

See https://numpy.org/doc/stable/reference/generated/numpy.unique.html#numpy.unique for details.

Returns the sorted unique elements of an array. There are three optional outputs in addition to the unique elements:

- the indices of the input array that give the unique values
- the indices of the unique array that reconstruct the input array
- the number of times each unique value comes up in the input array

When an axis is specified the subarrays indexed by the axis are sorted. This is done by making the specified axis the first dimension of the array (move the axis to the first dimension to keep the order of the other axes) and then flattening the subarrays in C order. The flattened subarrays are then viewed as a structured type with each element given a label, with the effect that we end up with a 1-D array of structured types that can be treated in the same way as any other 1-D array. The result is that the flattened subarrays are sorted in lexicographic order starting with the first element.

```
>>> np.unique([1, 1, 2, 2, 3, 3])
array([1, 2, 3])
>>> a = np.array([[1, 1], [2, 3]])
>>> np.unique(a)
array([1, 2, 3])
```

Return the unique rows of a 2D array

```
>>> a = np.array([[1, 0, 0], [1, 0, 0], [2, 3, 4]])
>>> np.unique(a, axis=0)
array([[1, 0, 0], [2, 3, 4]])
```

Return the indices of the original array that give the unique values:

```
>>> a = np.array(['a', 'b', 'b', 'c', 'a'])
>>> u, indices = np.unique(a, return_index=True)
>>> u
array(['a', 'b', 'c'], dtype='<U1')
>>> indices
array([0, 1, 3])
>>> a[indices]
array(['a', 'b', 'c'], dtype='<U1')
```

Reconstruct the input array from the unique values and inverse:

```
>>> a = np.array([1, 2, 6, 4, 2, 3, 2])
>>> u, indices = np.unique(a, return_inverse=True)
>>> u
array([1, 2, 3, 4, 6])
>>> indices
array([0, 1, 4, 3, 1, 2, 1])
>>> u[indices]
array([1, 2, 6, 4, 2, 3, 2])
```

Reconstruct the input values from the unique values and counts:

```
>>> a = np.array([1, 2, 6, 4, 2, 3, 2])
>>> values, counts = np.unique(a, return_counts=True)
>>> values
array([1, 2, 3, 4, 6])
>>> counts
array([1, 3, 1, 1, 1])
>>> np.repeat(values, counts)
array([1, 2, 2, 2, 3, 4, 6])    # original order not preserved
```

7.11 Numpy array manipulation: Rearranging elements

7.11.1 Reverse the order of elements in an array along the given axis: numpy.flip

npm.**flip**(*m*, *axis=None*)

Reverse the order of elements in an array along the given axis.

See https://numpy.org/doc/stable/reference/generated/numpy.flip.html#numpy.flip for details.

The shape of the array is preserved, but the elements are reordered.

flip(m, 0) is equivalent to flipud(m).

flip(m, 1) is equivalent to fliplr(m).

flip(m, n) corresponds to `m[...,::-1,...]` with `::-1` at position n.

flip(m) corresponds to `m[::-1,::-1,...,::-1]` with `::-1` at all positions.

flip(m, (0, 1)) corresponds to `m[::-1,::-1,...]` with `::-1` at position 0 and position 1.

```
>>> A = np.arange(8).reshape((2,2,2))
>>> A
array([[[0, 1],
        [2, 3]],
       [[4, 5],
        [6, 7]]])

>>> np.flip(A, 0)
array([[[4, 5],
        [6, 7]],
       [[0, 1],
        [2, 3]]])

>>> np.flip(A, 1)
array([[[2, 3],
        [0, 1]],
       [[6, 7],
        [4, 5]]])

>>> np.flip(A)
array([[[7, 6],
        [5, 4]],
       [[3, 2],
        [1, 0]]])

>>> np.flip(A, (0, 2))
array([[[5, 4],
        [7, 6]],
       [[1, 0],
        [3, 2]]])

>>> A = np.random.randn(3,4,5)
>>> np.all(np.flip(A,2) == A[:,:,::-1,...])
True
```

7.11.2 Reverse the order of elements along axis 1 (left/right): numpy.fliplr

npm.**fliplr**(*m*)

Reverse the order of elements along axis 1 (left/right).

See https://numpy.org/doc/stable/reference/generated/numpy.fliplr.html#numpy.fliplr for details.

For a 2-D array, this flips the entries in each row in the left/right direction. Columns are preserved, but appear in a different order than before.

```
>>> A = np.diag([1.,2.,3.])
>>> A
array([[1.,  0.,  0.],
       [0.,  2.,  0.],
       [0.,  0.,  3.]])
>>> np.fliplr(A)
array([[0.,  0.,  1.],
       [0.,  2.,  0.],
       [3.,  0.,  0.]])

>>> A = np.random.randn(2,3,5)
>>> np.all(np.fliplr(A) == A[:,::-1,...])
True
```

7.11.3 Reverse the order of elements along axis 0 (up/down): numpy.flipud

npm.**flipud**(*m*)

Reverse the order of elements along axis 0 (up/down).

See https://numpy.org/doc/stable/reference/generated/numpy.flipud.html#numpy.flipud for details.

For a 2-D array, this flips the entries in each column in the up/down direction. Rows are preserved, but appear in a different order than before.

Equivalent to `m[::-1, ...]` or `np.flip(m, axis=0)`. Requires the array to be at least 1-D.

```
>>> A = np.diag([1.0, 2, 3])
>>> A
array([[1.,  0.,  0.],
       [0.,  2.,  0.],
       [0.,  0.,  3.]])
>>> np.flipud(A)
array([[0.,  0.,  3.],
       [0.,  2.,  0.],
       [1.,  0.,  0.]])

>>> A = np.random.randn(2,3,5)
>>> np.all(np.flipud(A) == A[::-1,...])
True

>>> np.flipud([1,2])
array([2, 1])
```

7.11.4 Roll array elements along a given axis: numpy.roll

npm.**roll**(*a*, *shift*, *axis=None*)

Roll array elements along a given axis.

See https://numpy.org/doc/stable/reference/generated/numpy.roll.html#numpy.roll for details.

Elements that roll beyond the last position are re-introduced at the first.

```
>>> x = np.arange(10)
>>> np.roll(x, 2)
array([8, 9, 0, 1, 2, 3, 4, 5, 6, 7])
>>> np.roll(x, -2)
array([2, 3, 4, 5, 6, 7, 8, 9, 0, 1])

>>> x2 = np.reshape(x, (2, 5))
>>> x2
array([[0, 1, 2, 3, 4],
       [5, 6, 7, 8, 9]])
```

(continues on next page)

(continued from previous page)

```
>>> np.roll(x2, 1)
array([[9, 0, 1, 2, 3],
       [4, 5, 6, 7, 8]])
>>> np.roll(x2, -1)
array([[1, 2, 3, 4, 5],
       [6, 7, 8, 9, 0]])
>>> np.roll(x2, 1, axis=0)
array([[5, 6, 7, 8, 9],
       [0, 1, 2, 3, 4]])
>>> np.roll(x2, -1, axis=0)
array([[5, 6, 7, 8, 9],
       [0, 1, 2, 3, 4]])
>>> np.roll(x2, 1, axis=1)
array([[4, 0, 1, 2, 3],
       [9, 5, 6, 7, 8]])
>>> np.roll(x2, -1, axis=1)
array([[1, 2, 3, 4, 0],
       [6, 7, 8, 9, 5]])
>>> np.roll(x2, (1, 1), axis=(1, 0))
array([[9, 5, 6, 7, 8],
       [4, 0, 1, 2, 3]])
>>> np.roll(x2, (2, 1), axis=(1, 0))
array([[8, 9, 5, 6, 7],
       [3, 4, 0, 1, 2]])
```

7.11.5 Rotate an array by 90 degrees: numpy.rot90

npm.**rot90**(*m*, *k=1*, *axes=(0, 1)*)

Rotate an array by 90 degrees in the plane specified by axes.

See https://numpy.org/doc/stable/reference/generated/numpy.rot90.html#numpy.rot90 for details.

Rotation direction is from the first towards the second axis. This means for a 2D array with the default k and axes, the rotation will be counterclockwise

`rot90(m, k=1, axes=(1,0))` is the reverse of `rot90(m, k=1, axes=(0,1))`

`rot90(m, k=1, axes=(1,0))` is equivalent to `rot90(m, k=-1, axes=(0,1))`

```
>>> m = np.array([[1,2],[3,4]], int)
>>> m
array([[1, 2],
       [3, 4]])
>>> np.rot90(m)
array([[2, 4],
       [1, 3]])
>>> np.rot90(m, 2)
array([[4, 3],
       [2, 1]])
>>> m = np.arange(8).reshape((2,2,2))
>>> np.rot90(m, 1, (1,2))
array([[[1, 3],
        [0, 2]],
       [[5, 7],
        [4, 6]]])
```

7.12 Numpy array manipulation: Sorting

7.12.1 Sorted copy of an array: numpy.sort

npm.**sort**(*a*, *axis=-1*, *kind=None*, *order=None*, ***, *stable=None*)

Return a sorted copy of an array.

See https://numpy.org/doc/stable/reference/generated/numpy.sort.html#numpy.sort for details.

The various sorting algorithms are characterized by their average speed, worst case performance, work space size, and whether they are stable. A stable sort keeps items with the same key in the same relative order. The four algorithms implemented in NumPy have the following properties:

All the sort algorithms make temporary copies of the data when sorting along any but the last axis. Consequently, sorting along the last axis is faster and uses less space than sorting along any other axis.

The sort order for complex numbers is lexicographic. If both the real and imaginary parts are non-nan then the order is determined by the real parts except when they are equal, in which case the order is determined by the imaginary parts.

Previous to numpy 1.4.0 sorting real and complex arrays containing nan values led to undefined behaviour. In numpy versions >= 1.4.0 nan values are sorted to the end. The extended sort order is:

Real: [R, nan]

Complex: [R + Rj, R + nanj, nan + Rj, nan + nanj]

where R is a non-nan real value. Complex values with the same nan placements are sorted according to the non-nan part if it exists. Non-nan values are sorted as before.

quicksort has been changed to introsort. When sorting does not make enough progress it switches to heapsort. This implementation makes quicksort O(n*log(n)) in the worst case.

'stable' automatically chooses the best stable sorting algorithm for the data type being sorted. It, along with 'mergesort' is currently mapped to timsort or radix sort depending on the data type. API forward compatibility currently limits the ability to select the implementation and it is hardwired for the different data types.

Timsort is added for better performance on already or nearly sorted data. On random data timsort is almost identical to mergesort. It is now used for stable sort while quicksort is still the default sort if none is chosen. For timsort details, refer to CPython listsort.txt. 'mergesort' and 'stable' are mapped to radix sort for integer data types. Radix sort is an O(n) sort instead of O(n log n).

```
>>> a = np.array([[1,4],[3,1]])
>>> np.sort(a)                # sort along the last axis
array([[1, 4],
       [1, 3]])
>>> np.sort(a, axis=None)     # sort the flattened array
array([1, 1, 3, 4])
>>> np.sort(a, axis=0)        # sort along the first axis
array([[1, 1],
       [3, 4]])
```

Use the order keyword to specify a field to use when sorting a structured array:

```
>>> dtype = [('name', 'S10'), ('height', float), ('age', int)]
>>> values = [('Arthur', 1.8, 41), ('Lancelot', 1.9, 38),
          ('Galahad', 1.7, 38)]
>>> a = np.array(values, dtype=dtype)       # create a structured array
>>> np.sort(a, order='height')
array([('Galahad', 1.7, 38), ('Arthur', 1.8, 41),
       ('Lancelot', 1.8999999999999999, 38)],
      dtype=[('name', '|S10'), ('height', '<f8'), ('age', '<i4')])
Sort by age, then height if ages are equal:
```

(continues on next page)

(continued from previous page)

```
np.sort(a, order=['age', 'height'])
array([('Galahad', 1.7, 38), ('Lancelot', 1.8999999999999999, 38),
       ('Arthur', 1.8, 41)],
      dtype=[('name', '|S10'), ('height', '<f8'), ('age', '<i4')])
```

ndarray.sort

https://numpy.org/doc/stable/reference/generated/numpy.ndarray.sort.html#numpy.ndarray.sort

Sort an array in-place. Refer to numpy.sort for full documentation.

```
>>> a = np.array([[1,4], [3,1]])
>>> a.sort(axis=1)
>>> a
array([[1, 4],
       [1, 3]])
>>> a.sort(axis=0)
>>> a
array([[1, 3],
       [1, 4]])
```

Use the order keyword to specify a field to use when sorting a structured array:

```
>>> a = np.array([('a', 2), ('c', 1)], dtype=[('x', 'S1'), ('y', int)])
>>> a.sort(order='y')
>>> a
array([(b'c', 1), (b'a', 2)],
      dtype=[('x', 'S1'), ('y', '<i8')])
```

7.12.2 Indirect stable sort using a sequence of keys: numpy.lexsort

npm.**lexsort**(*keys*, *axis=-1*)

Perform an indirect stable sort using a sequence of keys.

See https://numpy.org/doc/stable/reference/generated/numpy.lexsort.html#numpy.lexsort for details.

Given multiple sorting keys, which can be interpreted as columns in a spreadsheet, lexsort returns an array of integer indices that describes the sort order by multiple columns. The last key in the sequence is used for the primary sort order, the second-to-last key for the secondary sort order, and so on. The keys argument must be a sequence of objects that can be converted to arrays of the same shape. If a 2D array is provided for the keys argument, its rows are interpreted as the sorting keys and sorting is according to the last row, second last row etc.

Sort names: first by surname, then by name.

```
>>> surnames =    ('Hertz',    'Galilei', 'Hertz')
>>> first_names = ('Heinrich', 'Galileo', 'Gustav')
>>> ind = np.lexsort((first_names, surnames))
>>> ind
array([1, 2, 0])

>>> [surnames[i] + ", " + first_names[i] for i in ind]
['Galilei, Galileo', 'Hertz, Gustav', 'Hertz, Heinrich']
```

Sort two columns of numbers:

```
>>> a = [1,5,1,4,3,4,4] # First column
>>> b = [9,4,0,4,0,2,1] # Second column
>>> ind = np.lexsort((b,a)) # Sort by a, then by b
>>> ind
array([2, 0, 4, 6, 5, 3, 1])
```

(continues on next page)

(continued from previous page)

```
>>> [(a[i],b[i]) for i in ind]
[(1, 0), (1, 9), (3, 0), (4, 1), (4, 2), (4, 4), (5, 4)]
```

Note that sorting is first according to the elements of a. Secondary sorting is according to the elements of b.

A normal argsort would have yielded:

```
>>> [(a[i],b[i]) for i in np.argsort(a)]
[(1, 9), (1, 0), (3, 0), (4, 4), (4, 2), (4, 1), (5, 4)]
```

Structured arrays are sorted lexically by argsort:

```
>>> x = np.array([(1,9), (5,4), (1,0), (4,4), (3,0), (4,2), (4,1)], dtype=np.dtype([('x', int), ('y', int)]))
>>> np.argsort(x) # or np.argsort(x, order=('x', 'y'))
array([2, 0, 4, 6, 5, 3, 1])
```

7.12.3 Indices that would sort an array: numpy.argsort

npm.**argsort**(*a*, *axis=-1*, *kind=None*, *order=None*, ***, *stable=None*)

Returns the indices that would sort an array.

See https://numpy.org/doc/stable/reference/generated/numpy.argsort.html#numpy.argsort for details.

Perform an indirect sort along the given axis using the algorithm specified by the kind keyword. It returns an array of indices of the same shape as a that index data along the given axis in sorted order.

One dimensional array:

```
>>> x = np.array([3, 1, 2])
>>> np.argsort(x)
array([1, 2, 0])
```

Two-dimensional array:

```
>>> x = np.array([[0, 3], [2, 2]])
>>> x
array([[0, 3],
       [2, 2]])

>>> ind = np.argsort(x, axis=0)  # sorts along first axis (down)
>>> ind
array([[0, 1],
       [1, 0]])
>>> np.take_along_axis(x, ind, axis=0)  # same as np.sort(x, axis=0)
array([[0, 2],
       [2, 3]])

>>> ind = np.argsort(x, axis=1)  # sorts along last axis (across)
>>> ind
array([[0, 1],
       [0, 1]])
>>> np.take_along_axis(x, ind, axis=1)  # same as np.sort(x, axis=1)
array([[0, 3],
       [2, 2]])
```

Indices of the sorted elements of a N-dimensional array:

```
>>> ind = np.unravel_index(np.argsort(x, axis=None), x.shape)
>>> ind
(array([0, 1, 1, 0]), array([0, 0, 1, 1]))
x[ind]  # same as np.sort(x, axis=None)
array([0, 2, 2, 3])
```

Sorting with keys:

```
>>> x = np.array([(1, 0), (0, 1)], dtype=[('x', '<i4'), ('y', '<i4')])
>>> x
array([(1, 0), (0, 1)],
      dtype=[('x', '<i4'), ('y', '<i4')])

>>> np.argsort(x, order=('x','y'))
array([1, 0])

>>> np.argsort(x, order=('y','x'))
array([0, 1])
```

7.12.4 Matching 1d index and data slices: numpy.take_along_axis

npm.**take_along_axis**(*arr*, *indices*, *axis=-1*)

Take values from the input array by matching 1d index and data slices.

This iterates over matching 1d slices oriented along the specified axis in the index and data arrays, and uses the former to look up values in the latter. These slices can be different lengths.

See https://numpy.org/doc/stable/reference/generated/numpy.argsort.html#numpy.argsort for details.

One dimensional array:

```
>>> a = np.array([[10, 30, 20], [60, 40, 50]])
>>> np.sort(a, axis=1)
array([[10, 20, 30],
       [40, 50, 60]])

>>> ai = np.argsort(a, axis=1)
>>> ai
array([[0, 2, 1],
       [1, 2, 0]])

>>> np.take_along_axis(a, ai, axis=1)
array([[10, 20, 30],
       [40, 50, 60]])
```

7.12.5 Sorting a complex array: numpy.sort_complex

npm.**sort_complex**(*a*, *axis=-1*, *kind=None*, *order=None*, ***, *stable=None*)

Sort a complex array using the real part first, then the imaginary part.

See https://numpy.org/doc/stable/reference/generated/numpy.sort_complex.html#numpy.sort_complex for details.

```
>>> np.sort_complex([5, 3, 6, 2, 1])
array([1.+0.j, 2.+0.j, 3.+0.j, 5.+0.j, 6.+0.j])

>>> np.sort_complex([1 + 2j, 2 - 1j, 3 - 2j, 3 - 3j, 3 + 5j])
array([1.+2.j,  2.-1.j,  3.-3.j,  3.-2.j,  3.+5.j])
```

7.13 Numpy array manipulation: Searching

7.13.1 Indices of the maximum values along an axis: numpy.argmax

npm.**argmax**(*a*, *axis=None*, *out=None*, ***, *keepdims=<no value>*)

Returns the indices of the maximum values along an axis.

See https://numpy.org/doc/stable/reference/generated/numpy.argmax.html#numpy.argmax for details.

In case of multiple occurrences of the maximum values, the indices corresponding to the first occurrence are returned.

```
>>> a = np.arange(6).reshape(2,3) + 10
>>> a
array([[10, 11, 12],
       [13, 14, 15]])
>>> np.argmax(a)
5
>>> np.argmax(a, axis=0)
array([1, 1, 1])
>>> np.argmax(a, axis=1)
array([2, 2])
```

Indexes of the maximal elements of a N-dimensional array:

```
>>> ind = np.unravel_index(np.argmax(a, axis=None), a.shape)
>>> ind
(1, 2)
>>> a[ind]
15

>>> b = np.arange(6)
>>> b[1] = 5
>>> b
array([0, 5, 2, 3, 4, 5])
>>> np.argmax(b)  # Only the first occurrence is returned.
1

>>> x = np.array([[4,2,3], [1,0,3]])
>>> index_array = np.argmax(x, axis=-1)
>>> # Same as np.amax(x, axis=-1, keepdims=True)
>>> np.take_along_axis(x, np.expand_dims(index_array, axis=-1), axis=-1)
array([[4],
       [3]])
>>> # Same as np.amax(x, axis=-1)
>>> np.take_along_axis(x, np.expand_dims(index_array, axis=-1), axis=-1).squeeze(axis=-1)
array([4, 3])
```

Setting keepdims to True,

```
>>> x = np.arange(24).reshape((2, 3, 4))
>>> res = np.argmax(x, axis=1, keepdims=True)
>>> res.shape
(2, 1, 4)
```

7.13.2 Get indices of the minimum values along an axis: numpy.argmin

npm.**argmin**(*a*, *axis=None*, *out=None*, ***, *keepdims=<no value>*)

Returns the indices of the minimum values along an axis.

See https://numpy.org/doc/stable/reference/generated/numpy.argmin.html#numpy.argmin for details.

```
>>> a = np.arange(6).reshape(2,3) + 10
>>> a
array([[10, 11, 12],
       [13, 14, 15]])
>>> np.argmin(a)
0
>>> np.argmin(a, axis=0)
array([0, 0, 0])
>>> np.argmin(a, axis=1)
array([0, 0])
```

Indices of the minimum elements of a N-dimensional array:

```
>>> ind = np.unravel_index(np.argmin(a, axis=None), a.shape)
>>> ind
(0, 0)
>>> a[ind]
10

>>> b = np.arange(6) + 10
>>> b[4] = 10
b
>>> array([10, 11, 12, 13, 10, 15])
np.argmin(b)  # Only the first occurrence is returned.
0

>>> x = np.array([[4,2,3], [1,0,3]])
>>> index_array = np.argmin(x, axis=-1)
>>> # Same as np.amin(x, axis=-1, keepdims=True)
>>> np.take_along_axis(x, np.expand_dims(index_array, axis=-1), axis=-1)
array([[2],
       [0]])
>>> # Same as np.amax(x, axis=-1)
>>> np.take_along_axis(x, np.expand_dims(index_array, axis=-1), axis=-1).squeeze(axis=-1)
array([2, 0])
```

Setting keepdims to True,

```
>>> x = np.arange(24).reshape((2, 3, 4))
>>> res = np.argmin(x, axis=1, keepdims=True)
>>> res.shape
(2, 1, 4)
```

7.13.3 Find the indices of array elements that are non-zero, grouped by element: numpy.argwhere

npm.**argwhere**(*a*)

Find the indices of array elements that are non-zero, grouped by element.

See https://numpy.org/doc/stable/reference/generated/numpy.argwhere.html#numpy.argwhere for details.

np.argwhere(a) is almost the same as np.transpose(np.nonzero(a)), but produces a result of the correct shape for a 0D array.

The output of argwhere is not suitable for indexing arrays. For this purpose use nonzero(a) instead.

```
>>> x = np.arange(6).reshape(2,3)
>>> x
array([[0, 1, 2],
       [3, 4, 5]])
>>> np.argwhere(x>1)
array([[0, 2],
       [1, 0],
       [1, 1],
       [1, 2]])
```

7.13.4 Get the indices of array elements that are non-zero: numpy.nonzero

npm.**nonzero**(*a*)

Return the indices of the elements that are non-zero.

See https://numpy.org/doc/stable/reference/generated/numpy.nonzero.html#numpy.nonzero for details.

Returns a tuple of arrays, one for each dimension of a, containing the indices of the non-zero elements in that dimension. The values in a are always tested and returned in row-major, C-style order.

To group the indices by element, rather than dimension, use argwhere, which returns a row for each non-zero element.

While the nonzero values can be obtained with a[nonzero(a)], it is recommended to use x[x.astype(bool)] or x[x != 0] instead, which will correctly handle 0-d arrays.

```
>>> x = np.array([[3, 0, 0], [0, 4, 0], [5, 6, 0]])
>>> x
array([[3, 0, 0],
       [0, 4, 0],
       [5, 6, 0]])
>>> np.nonzero(x)
(array([0, 1, 2, 2]), array([0, 1, 0, 1]))

>>> x[np.nonzero(x)]
array([3, 4, 5, 6])
>>> np.transpose(np.nonzero(x))
array([[0, 0],
       [1, 1],
       [2, 0],
       [2, 1]])
```

A common use for nonzero is to find the indices of an array, where a condition is True. Given an array a, the condition a > 3 is a boolean array and since False is interpreted as 0, np.nonzero(a > 3) yields the indices of the a where the condition is true.

```
>>> a = np.array([[1, 2, 3], [4, 5, 6], [7, 8, 9]])
a > 3
array([[False, False, False],
       [ True,  True,  True],
       [ True,  True,  True]])
>>> np.nonzero(a > 3)
(array([1, 1, 1, 2, 2, 2]), array([0, 1, 2, 0, 1, 2]))
```

Using this result to index a is equivalent to using the mask directly:

```
>>> a[np.nonzero(a > 3)]
array([4, 5, 6, 7, 8, 9])
>>> a[a > 3]  # prefer this spelling
array([4, 5, 6, 7, 8, 9])
```

nonzero can also be called as a method of the array.

```
>>> (a > 3).nonzero()
(array([1, 1, 1, 2, 2, 2]), array([0, 1, 2, 0, 1, 2]))
```

7.13.5 Return elements depending on a condition: numpy.where

npm.**where**(*condition*, [*x*, *y*,]/)

Return elements chosen from x or y depending on condition.

See https://numpy.org/doc/stable/reference/generated/numpy.where.html#numpy.where for details

```
>>> a = np.arange(10)
>>> a
array([0, 1, 2, 3, 4, 5, 6, 7, 8, 9])
>>> np.where(a < 5, a, 10*a)
array([ 0,  1,  2,  3,  4, 50, 60, 70, 80, 90])
```

This can be used on multidimensional arrays too:

```
>>> np.where([[True, False], [True, True]],
         [[1, 2], [3, 4]],
         [[9, 8], [7, 6]])
array([[1, 8],
       [3, 4]])
```

The shapes of x, y, and the condition are broadcast together:

```
>>> x, y = np.ogrid[:3, :4]
>>> np.where(x < y, x, 10 + y)  # both x and 10+y are broadcast
array([[10,  0,  0,  0],
       [10, 11,  1,  1],
       [10, 11, 12,  2]])

>>> a = np.array([[0, 1, 2],
              [0, 2, 4],
              [0, 3, 6]])
>>> np.where(a < 4, a, -1)  # -1 is broadcast
array([[ 0,  1,  2],
       [ 0,  2, -1],
       [ 0,  3, -1]])
```

7.13.6 Return an array drawn from elements in choicelist, depending on a condition: numpy.select

npm.**select**(*condlist*, *choicelist*, *default=0*)

Return an array drawn from elements in choicelist, depending on conditions.

See https://numpy.org/doc/stable/reference/generated/numpy.select.html for details

Beginning with an array of integers from 0 to 5 (inclusive), elements less than 3 are negated, elements greater than 3 are squared, and elements not meeting either of these conditions (exactly 3) are replaced with a default value of 42.

```
>>> a = np.arange(6)
>>> condlist = [x<3, x>3]
>>> choicelist = [-x, x**2]
>>> np.select(condlist, choicelist, 42)
array([ 0,  -1,  -2, 42, 16, 25])
```

```
>>> condlist = [x<=4, x>3]
>>> choicelist = [x, x**2]
>>> np.select(condlist, choicelist, 55)
array([ 0,  1,  2,  3,  4, 25])
```

7.14 Numpy mathematical functions: Sums, products, differences

See also: https://numpy.org/doc/stable/reference/routines.math.html

7.14.1 Product of array elements: numpy.prod

npm.**prod**(*a*, *axis=None*, *dtype=None*, *out=None*, *keepdims=<no value>*, *initial=<no value>*, *where=<no value>*)

Return the product of array elements over a given axis. The product of an empty array is the neutral element 1.

See https://numpy.org/doc/stable/reference/generated/numpy.prod.html#numpy.prod for details.

```
>>> np.prod([])
1.0
```

By default, calculate the product of all elements:

```
>>> np.prod(a, axis=1)
array([  2.,  12.])
>>> np.prod(a, axis=0)
array([3., 8.])
```

Or select specific elements to include:

```
>>> np.prod([1., np.nan, 3.], where=[True, False, True])
3.0
```

If the type of x is unsigned, then the output type is the unsigned platform integer:

```
>>> x = np.array([1, 2, 3], dtype=np.uint8)
np.prod(x).dtype == np.uint
True
```

If x is of a signed integer type, then the output type is the default platform integer:

```
>>> x = np.array([1, 2, 3], dtype=np.int8)
np.prod(x).dtype == int
True
```

You can also start the product with a value other than one:

```
>>> np.prod([1, 2], initial=5)
10
```

7.14.2 Sum of array elements: numpy.sum

npm.**sum**(*a*, *axis=None*, *dtype=None*, *out=None*, *keepdims=<no value>*, *initial=<no value>*, *where=<no value>*)

Sum of array elements over a given axis. The sum of an empty array is the neutral element 0.

See https://numpy.org/doc/stable/reference/generated/numpy.sum.html#numpy.sum for details.

```
>>> np.prod([])
1.0
```

For floating point numbers the numerical precision of sum (and np.add.reduce) is in general limited by directly adding each number individually to the result causing rounding errors in every step. However, often numpy will use a numerically better approach (partial pairwise summation) leading to improved precision in many use-cases. This improved precision is always provided when no axis is given. When axis is given, it will depend on which axis is summed. Technically, to provide the best speed possible, the improved precision is only used when the summation is along the fast axis in memory. Note that the exact precision may vary depending on other parameters. In contrast to NumPy, Python's math.fsum function uses a slower but more

precise approach to summation. Especially when summing a large number of lower precision floating point numbers, such as float32, numerical errors can become significant. In such cases it can be advisable to use dtype="float64" to use a higher precision for the output.

```
>>> np.sum([0.5, 1.5])
2.0
>>> np.sum([0.5, 0.7, 0.2, 1.5], dtype=np.int32)
1
>>> np.sum([[0, 1], [0, 5]])
6
>>> np.sum([[0, 1], [0, 5]], axis=0)
array([0, 6])
>>> np.sum([[0, 1], [0, 5]], axis=1)
array([1, 5])
>>> np.sum([[0, 1], [np.nan, 5]], where=[False, True], axis=1)
array([1., 5.])
```

If the accumulator is too small, overflow occurs:

```
>>> np.ones(128, dtype=np.int8).sum(dtype=np.int8)
-128
```

You can also start the sum with a value other than zero:

```
>>> np.sum([10], initial=5)
15
```

7.14.3 Cumulative product of array elements: numpy.cumprod

npm.**cumprod**(*a*, *axis=None*, *dtype=None*, *out=None*)

Return the cumulative product of elements along a given axis.

See https://numpy.org/doc/stable/reference/generated/numpy.cumprod.html#numpy.cumprod for details.

```
>>> a = np.array([1,2,3])
>>> np.cumprod(a) # intermediate results 1, 1*2
              # total product 1*2*3 = 6
array([1, 2, 6])
>>> a = np.array([[1, 2, 3], [4, 5, 6]])
>>> np.cumprod(a, dtype=float) # specify type of output
array([   1.,    2.,    6.,   24.,  120.,  720.])
```

The cumulative product for each column (i.e., over the rows) of a:

```
>>> np.cumprod(a, axis=0)
array([[ 1,  2,  3],
       [ 4, 10, 18]])
```

The cumulative product for each row (i.e. over the columns) of a:

```
>>> np.cumprod(a,axis=1)
array([[  1,   2,   6],
       [  4,  20, 120]])
```

7.14.4 Cumulative sum of array elements: numpy.cumsum

npm.**cumsum**(*a*, *axis=None*, *dtype=None*, *out=None*)

Return the cumulative sum of the elements along a given axis.

See https://numpy.org/doc/stable/reference/generated/numpy.cumsum.html#numpy.cumsum for details.

Arithmetic is modular when using integer types, and no error is raised on overflow.

cumsum(a)[-1] may not be equal to sum(a) for floating-point values since sum may use a pairwise summation routine, reducing the roundoff-error. See sum for more information.

The cumulative product for each row (i.e. over the columns) of a:

```
>>> a = np.array([[1,2,3], [4,5,6]])
>>> a
array([[1, 2, 3],
       [4, 5, 6]])
>>> np.cumsum(a)
array([ 1,  3,  6, 10, 15, 21])
>>> np.cumsum(a, dtype=float)     # specifies type of output value(s)
array([  1.,   3.,   6.,  10.,  15.,  21.])

>>> np.cumsum(a,axis=0)      # sum over rows for each of the 3 columns
array([[1, 2, 3],
       [5, 7, 9]])
>>> np.cumsum(a,axis=1)      # sum over columns for each of the 2 rows
array([[ 1,  3,  6],
       [ 4,  9, 15]])
```

cumsum(b)[-1] may not be equal to sum(b)

```
>>> b = np.array([1, 2e-9, 3e-9] * 1000000)
>>> b.cumsum()[-1]
1000000.0050045159
>>> b.sum()
1000000.0050000029
```

7.14.5 N-th discrete difference: numpy.diff

npm.**diff**(*a*, *n=1*, *axis=-1*, *prepend=<no value>*, *append=<no value>*)

Calculate the n-th discrete difference along the given axis.

See https://numpy.org/doc/stable/reference/generated/numpy.diff.html#numpy.diff for details.

The first difference is given by out[i] = a[i+1] - a[i] along the given axis, higher differences are calculated by using diff recursively.

```
>>> x = np.array([1, 2, 4, 7, 0])
>>> np.diff(x)
array([ 1,  2,  3, -7])
>>> np.diff(x, n=2)
array([  1,   1, -10])

>>> x = np.array([[1, 3, 6, 10], [0, 5, 6, 8]])
>>> np.diff(x)
array([[2, 3, 4],
       [5, 1, 2]])
>>> np.diff(x, axis=0)
array([[-1,  2,  0, -2]])

>>> x = np.arange('1066-10-13', '1066-10-16', dtype=np.datetime64)
>>> np.diff(x)
array([1, 1], dtype='timedelta64[D]')
```

7.14.6 Differences between consecutive elements: numpy.ediff1d

npm.**ediff1d**(*ary*, *to_end=None*, *to_begin=None*)

Calculate the differences between consecutive elements of an array.

See https://numpy.org/doc/stable/reference/generated/numpy.ediff1d.html#numpy.ediff1d for details.

The differences between consecutive elements of an array.

```
>>> x = np.array([1, 2, 4, 7, 0])
>>> np.ediff1d(x)
array([ 1,  2,  3, -7])

>>> np.ediff1d(x, to_begin=-99, to_end=np.array([88, 99]))
array([-99,   1,   2, ...,  -7,  88,  99])
```

The returned array is always 1D.

```
>>> y = [[1, 2, 4], [1, 6, 24]]
>>> np.ediff1d(y)
array([ 1,  2, -3,  5, 18])
```

7.14.7 Gradient of an N-dimensional array: numpy.gradient

npm.**gradient**(*f*, **varargs*, *axis=None*, *edge_order=1*)

Return the gradient of an N-dimensional array.

See https://numpy.org/doc/stable/reference/generated/numpy.gradient.html#numpy.gradient for details.

The gradient is computed using second order accurate central differences in the interior points and either first or second order accurate one-sides (forward or backwards) differences at the boundaries. The returned gradient hence has the same shape as the input array.

```
>>> f = np.array([1, 2, 4, 7, 11, 16], dtype=float)
>>> np.gradient(f)
array([1. , 1.5, 2.5, 3.5, 4.5, 5. ])
>>> np.gradient(f, 2)
array([0.5 ,  0.75,  1.25,  1.75,  2.25,  2.5 ])
```

Spacing can be also specified with an array that represents the coordinates of the values F along the dimensions. For instance a uniform spacing:

```
>>> x = np.arange(f.size)
>>> np.gradient(f, x)
array([1. ,  1.5,  2.5,  3.5,  4.5,  5. ])
```

Or a non uniform one:

```
>>> x = np.array([0., 1., 1.5, 3.5, 4., 6.], dtype=float)
>>> np.gradient(f, x)
array([1. ,  3. ,  3.5,  6.7,  6.9,  2.5])
```

For two dimensional arrays, the return will be two arrays ordered by axis. In this example the first array stands for the gradient in rows and the second one in columns direction:

```
>>> np.gradient(np.array([[1, 2, 6], [3, 4, 5]], dtype=float))
[array([[ 2.,  2., -1.],
       [ 2.,  2., -1.]]), array([[1. , 2.5, 4. ],
       [1. , 1. , 1. ]])]
```

In this example the spacing is also specified: uniform for axis=0 and non uniform for axis=1

```
>>> dx = 2.
>>> y = [1., 1.5, 3.5]
>>> np.gradient(np.array([[1, 2, 6], [3, 4, 5]], dtype=float), dx, y)
[array([[ 1. ,  1. , -0.5],
       [ 1. ,  1. , -0.5]]), array([[2. , 2. , 2. ],
       [2. , 1.7, 0.5]])]
```

It is possible to specify how boundaries are treated using edge_order

```
>>> x = np.array([0, 1, 2, 3, 4])
>>> f = x**2
>>> np.gradient(f, edge_order=1)
array([1.,  2.,  4.,  6.,  7.])
>>> np.gradient(f, edge_order=2)
array([0., 2., 4., 6., 8.])
```

The axis keyword can be used to specify a subset of axes of which the gradient is calculated

```
>>> np.gradient(np.array([[1, 2, 6], [3, 4, 5]], dtype=float), axis=0)
array([[ 2.,  2., -1.],
       [ 2.,  2., -1.]])
```

7.14.8 Trapezoidal rule: numpy.trapezoid

npm.**trapezoid**(*y*, *x=None*, *dx=1.0*, *axis=-1*)

Integrate along the given axis using the composite trapezoidal rule.

Note was called trapez before NumPy 2.0.

See https://numpy.org/doc/stable/reference/generated/numpy.trapezoid.html#numpy-trapezoid for details.

If x is provided, the integration happens in sequence along its elements - they are not sorted.

Use the trapezoidal rule on evenly spaced points:

```
>>> np.trapz([1, 2, 3])
4.0
```

The spacing between sample points can be selected by either the x or dx arguments:

```
>>> np.trapz([1, 2, 3], x=[4, 6, 8])
8.0
>>> np.trapz([1, 2, 3], dx=2)
8.0
```

Using a decreasing x corresponds to integrating in reverse:

```
>>> np.trapz([1, 2, 3], x=[8, 6, 4])
-8.0
```

More generally x is used to integrate along a parametric curve. We can estimate the integral using:

```
>>> x = np.linspace(0, 1, num=50)
>>> y = x**2
>>> np.trapz(y, x)
0.33340274885464394
```

Or estimate the area of a circle, noting we repeat the sample which closes the curve:

```
>>> theta = np.linspace(0, 2 * np.pi, num=1000, endpoint=True)
>>> np.trapz(np.cos(theta), x=np.sin(theta))
3.141571941375841
```

np.trapz can be applied along a specified axis to do multiple computations in one call:

```
>>> a = np.arange(6).reshape(2, 3)
>>> a
array([[0, 1, 2],
       [3, 4, 5]])
>>> np.trapz(a, axis=0)
array([1.5, 2.5, 3.5])
>>> np.trapz(a, axis=1)
array([2.,  8.])
```

7.15 Numpy mathematical functions: Extrema Finding

7.15.1 Element-wise maximum of array elements: numpy.maximum

npm.**maximum**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*)

Element-wise maximum of array elements.

See https://numpy.org/doc/stable/reference/generated/numpy.maximum.html#numpy.maximum for details.

Compare two arrays and return a new array containing the element-wise maxima. If one of the elements being compared is a NaN, then that element is returned. If both elements are NaNs then the first is returned. The latter distinction is important for complex NaNs, which are defined as at least one of the real or imaginary parts being a NaN. The net effect is that NaNs are propagated.

```
>>> np.maximum([2, 3, 4], [1, 5, 2])
array([2, 5, 4])

>>> np.maximum(np.eye(2), [0.5, 2]) # broadcasting
array([[ 1. ,  2. ],
       [ 0.5,  2. ]])

>>> np.maximum([np.nan, 0, np.nan], [0, np.nan, np.nan])
array([nan, nan, nan])
>>> np.maximum(np.Inf, 1)
inf
```

7.15.2 Element-wise minimum of array elements: numpy.minimum

npm.**minimum**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*)

See https://numpy.org/doc/stable/reference/generated/numpy.minimum.html#numpy.minimum for details.

Compare two arrays and return a new array containing the element-wise minima. If one of the elements being compared is a NaN, then that element is returned. If both elements are NaNs then the first is returned. The latter distinction is important for complex NaNs, which are defined as at least one of the real or imaginary parts being a NaN. The net effect is that NaNs are propagated.

```
>>> np.minimum([2, 3, 4], [1, 5, 2])
array([1, 3, 2])

>>> np.minimum(np.eye(2), [0.5, 2]) # broadcasting
array([[ 0.5,  0. ],
       [ 0. ,  1. ]])

>>> np.minimum([np.nan, 0, np.nan],[0, np.nan, np.nan])
array([nan, nan, nan])
>>> np.minimum(-np.Inf, 1)
-inf
```

7.15.3 Maximum of an array or maximum along an axis: numpy.max

npm.**max**(*a*, *axis=None*, *out=None*, *keepdims=<no value>*, *initial=<no value>*, *where=<no value>*)

Return the maximum of an array or maximum along an axis.

See https://numpy.org/doc/stable/reference/generated/numpy.max.html#numpy.max for details

NaN values are propagated, that is if at least one item is NaN, the corresponding max value will be NaN as well. To ignore NaN values (MATLAB behavior), please use nanmax.

Don't use max for element-wise comparison of 2 arrays; when a.shape[0] is 2, maximum(a[0], a[1]) is faster than max(a, axis=0).

```
>>> a = np.arange(4).reshape((2,2))
>>> a
array([[0, 1],
       [2, 3]])
>>> np.max(a)           # Maximum of the flattened array
3
>>> np.max(a, axis=0)   # Maxima along the first axis
array([2, 3])
>>> np.max(a, axis=1)   # Maxima along the second axis
array([1, 3])
>>> np.max(a, where=[False, True], initial=-1, axis=0)
array([-1,  3])
>>> b = np.arange(5, dtype=float)
>>> b[2] = np.NaN
>>> np.max(b)
nan
>>> np.max(b, where=~np.isnan(b), initial=-1)
4.0
>>> np.nanmax(b)
4.0
```

You can use an initial value to compute the maximum of an empty slice, or to initialize it to a different value:

```
>>> np.max([[-50], [10]], axis=-1, initial=0)
array([ 0, 10])
```

Notice that the initial value is used as one of the elements for which the maximum is determined, unlike for the default argument Python's max function, which is only used for empty iterables.

```
>>> np.max([5], initial=6)
6
>>> max([5], default=6)
5
```

7.15.4 Minimum of an array or maximum along an axis: numpy.min

npm.**min**(*a*, *axis=None*, *out=None*, *keepdims=<no value>*, *initial=<no value>*, *where=<no value>*)

Return the minimum of an array or minimum along an axis.

See https://numpy.org/doc/stable/reference/generated/numpy.min.html#numpy.min for details.

NaN values are propagated, that is if at least one item is NaN, the corresponding min value will be NaN as well. To ignore NaN values (MATLAB behavior), please use nanmin.

Don't use min for element-wise comparison of 2 arrays; when a.shape[0] is 2, minimum(a[0], a[1]) is faster than min(a, axis=0).

```
>>> a = np.arange(4).reshape((2,2))
>>> a
array([[0, 1],
       [2, 3]])
>>> np.min(a)           # Minimum of the flattened array
0
>>> np.min(a, axis=0)   # Minima along the first axis
array([0, 1])
>>> np.min(a, axis=1)   # Minima along the second axis
array([0, 2])
>>> np.min(a, where=[False, True], initial=10, axis=0)
array([10,  1])

>>> b = np.arange(5, dtype=float)
>>> b[2] = np.NaN
>>> np.min(b)
nan
```

(continues on next page)

(continued from previous page)

```
>>> np.min(b, where=~np.isnan(b), initial=10)
0.0
>>> np.nanmin(b)
0.0

>>> np.min([[-50], [10]], axis=-1, initial=0)
array([-50,   0])
```

Notice that the initial value is used as one of the elements for which the minimum is determined, unlike for the default argument Python's max function, which is only used for empty iterables. Notice that this isn't the same as Python's default argument.

```
>>> np.min([6], initial=5)
5
>>> min([6], default=5)
6
```

7.16 Numpy mathematical functions: Arithmetic operations, elementwise

7.16.1 Numerical positive, element-wise: numpy.positive

npm.**positive**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*)

Numerical positive, element-wise. Equivalent to x.copy(), but only defined for types that support arithmetic.

See https://numpy.org/doc/stable/reference/generated/numpy.positive.html for details.

```
>>> x1 = np.array(([1., -1.]))
>>> np.positive(x1)
array([ 1., -1.])
```

The unary + operator can be used as a shorthand for np.positive on ndarrays.

```
>>> x1 = np.array(([1., -1.]))
>>> +x1
array([ 1., -1.])
```

7.16.2 Numerical negative, element-wise: numpy.negative

npm.**negative**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*)

Numerical negative, element-wise.

See https://numpy.org/doc/stable/reference/generated/numpy.negative.html for details.

```
>>> np.negative([1.,-1.])
array([-1.,  1.])
```

The unary - operator can be used as a shorthand for np.negative on ndarrays.

```
x1 = np.array(([1., -1.]))
-x1
array([-1.,  1.])
```

7.16.3 Add arguments element-wise: numpy.add

npm.**add**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*)

Add arguments element-wise. Equivalent to x1 + x2 in terms of array broadcasting.

See https://numpy.org/doc/stable/reference/generated/numpy.add.html#numpy.add for details

```
>>> np.add(1.0, 4.0)
5.0
>>> x1 = np.arange(9.0).reshape((3, 3))
>>> x2 = np.arange(3.0)
>>> np.add(x1, x2)
array([[  0.,   2.,   4.],
       [  3.,   5.,   7.],
       [  6.,   8.,  10.]])
```

The + operator can be used as a shorthand for np.add on ndarrays.

```
>>> x1 = np.arange(9.0).reshape((3, 3))
>>> x2 = np.arange(3.0)
>>> x1 + x2
array([[ 0.,  2.,  4.],
       [ 3.,  5.,  7.],
       [ 6.,  8., 10.]])
```

7.16.4 Subtract arguments element-wise: numpy.subtract

npm.**subtract**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*)

Subtract arguments, element-wise. Equivalent to x1 - x2 in terms of array broadcasting.

See https://numpy.org/doc/stable/reference/generated/numpy.subtract.html#numpy.subtract for details.

```
>>> np.subtract(1.0, 4.0)
-3.0
>>> x1 = np.arange(9.0).reshape((3, 3))
>>> x2 = np.arange(3.0)
>>> np.subtract(x1, x2)
array([[ 0.,  0.,  0.],
       [ 3.,  3.,  3.],
       [ 6.,  6.,  6.]])
```

The - operator can be used as a shorthand for np.subtract on ndarrays.

```
>>> x1 = np.arange(9.0).reshape((3, 3))
>>> x2 = np.arange(3.0)
>>> x1 - x2
array([[0., 0., 0.],
       [3., 3., 3.],
       [6., 6., 6.]])
```

7.16.5 Multiply arguments element-wise: numpy.multiply

npm.**multiply**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*)

Multiply arguments element-wise. Equivalent to x1 * x2 in terms of array broadcasting.

See https://numpy.org/doc/stable/reference/generated/numpy.multiply.html for details.

```
>>> np.multiply(2.0, 4.0)
8.0
>>> x1 = np.arange(9.0).reshape((3, 3))
>>> x2 = np.arange(3.0)
>>> np.multiply(x1, x2)
array([[  0.,   1.,   4.],
       [  0.,   4.,  10.],
       [  0.,   7.,  16.]])
```

The * operator can be used as a shorthand for np.multiply on ndarrays.

```
>>> x1 = np.arange(9.0).reshape((3, 3))
>>> x2 = np.arange(3.0)
>>> x1 * x2
array([[  0.,   1.,   4.],
       [  0.,   4.,  10.],
       [  0.,   7.,  16.]])
```

7.16.6 Divide arguments element-wise: numpy.divide

npm.**divide**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*)

Divide arguments element-wise. Equivalent to x1 / x2 in terms of array-broadcasting.

See https://numpy.org/doc/stable/reference/generated/numpy.divide.html for details.

`true_divide` is an alias.

```
>>> np.divide(2.0, 4.0)
0.5
>>> x1 = np.arange(9.0).reshape((3, 3))
>>> x2 = np.arange(3.0)
>>> np.divide(x1, x2)
array([[nan, 1. , 1. ],
       [inf, 4. , 2.5],
       [inf, 7. , 4. ]])
```

The / operator can be used as a shorthand for np.divide on ndarrays.

```
>>> x1 = np.arange(9.0).reshape((3, 3))
>>> x2 = 2 * np.ones(3)
x>>> 1 / x2
array([[0. , 0.5, 1. ],
       [1.5, 2. , 2.5],
       [3. , 3.5, 4. ]])
```

7.16.7 Floor-divide arguments element-wise: numpy.floor_divide

npm.**floor_divide**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*)

Return the largest integer smaller or equal to the division of the inputs. It is equivalent to the Python // operator and pairs with the Python % (remainder), function so that a = a % b + b * (a // b) up to roundoff.

See https://numpy.org/doc/stable/reference/generated/numpy.floor_divide.html for details.

```
>>> np.floor_divide(7,3)
2
>>> np.floor_divide([1., 2., 3., 4.], 2.5)
array([ 0.,  0.,  1.,  1.])
```

The `//` operator can be used as a shorthand for `np.floor_divide` on ndarrays.

```
>>> x1 = np.array([1., 2., 3., 4.])
>>> x1 // 2.5
array([0., 0., 1., 1.])
```

7.16.8 Element-wise remainder of division: numpy.remainder

npm.**remainder**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*)

Returns the element-wise remainder of division.

https://numpy.org/doc/stable/reference/generated/numpy.remainder.html

Computes the remainder complementary to the `floor_divide` function. It is equivalent to the Python modulus operator `x1 % x2` and has the same sign as the divisor x2. Returns 0 when x2 is 0 and both x1 and x2 are (arrays of) integers. The function `mod` is an alias of remainder.

```
>>> np.np.remainder([4, 7], [2, 3])
array([0, 1])
>>> np.remainder(np.arange(7), 5)
array([0, 1, 2, 3, 4, 0, 1])
```

The `%` operator can be used as a shorthand for `np.remainder` on ndarrays.

```
>>> x1 = np.arange(7)
>>> x1 % 5
array([0, 1, 2, 3, 4, 0, 1])
```

7.16.9 Element-wise square: numpy.square

npm.**square**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*)

Return the element-wise square of the input.

See https://numpy.org/doc/stable/reference/generated/numpy.square.html for details.

```
>>> np.square([-1j, 1])
array([-1.-0.j,  1.+0.j])
```

7.16.10 Element-wise reciprocal: numpy.reciprocal

npm.**reciprocal**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*)

Return the reciprocal of the argument, element-wise.

See https://numpy.org/doc/stable/reference/generated/numpy.reciprocal.html for details.

```
>>> np.reciprocal(2.)
0.5
>>> np.reciprocal([1, 2., 3.33])
array([ 1.       ,  0.5      ,  0.3003003])
```

7.17 Numpy mathematical functions: Averages and variances

7.17.1 Median of the array elements.: numpy.median

npm.**median**(*a*, *axis=None*, *out=None*, *overwrite_input=False*, *keepdims=False*)

Returns the median of the array elements.

See https://numpy.org/doc/stable/reference/generated/numpy.median.html for details.

Computes the median along the specified axis.

Given a vector `V` of length `N`, the median of `V` is the middle value of a sorted copy of `V`, `V_sorted` - i e., `V_sorted[(N-1)/2]`, when `N` is odd, and the average of the two middle values of `V_sorted` when `N` is even.

```
>>> a = np.array([[10, 7, 4], [3, 2, 1]])
>>> a
array([[10,  7,  4],
       [ 3,  2,  1]])
>>> np.median(a)
3.5

>>> np.median(a, axis=0)
array([6.5, 4.5, 2.5])

>>> np.median(a, axis=1)
array([7.,  2.])

>>> m = np.median(a, axis=0)
out = np.zeros_like(m)
>>> np.median(a, axis=0, out=m)
array([6.5,  4.5,  2.5])
>>> m
array([6.5,  4.5,  2.5])

>>> b = a.copy()
>>> np.median(b, axis=1, overwrite_input=True)
array([7.,  2.])

>>> assert not np.all(a==b)
>>> b = a.copy()
>>> np.median(b, axis=None, overwrite_input=True)
3.5
assert not np.all(a==b)
```

7.17.2 Average of the array elements.: numpy.average

npm.**average**(*a*, *axis=None*, *weights=None*, *returned=False*, ***, *keepdims=<no value>*)

Compute the weighted average along the specified axis.

See https://numpy.org/doc/stable/reference/generated/numpy.average.html for details.

```
>>> data = np.arange(1, 5)
>>> data
array([1, 2, 3, 4])
>>> np.average(data)
2.5
>>> np.average(np.arange(1, 11), weights=np.arange(10, 0, -1))
4.0

>>> data = np.arange(6).reshape((3, 2))
>>> data
array([[0, 1],
       [2, 3],
```

(continues on next page)

(continued from previous page)

```
       [4, 5]])
>>> np.average(data, axis=1, weights=[1./4, 3./4])
array([0.75, 2.75, 4.75])
>>> np.average(data, weights=[1./4, 3./4])
Traceback (most recent call last):
    ...
TypeError: Axis must be specified when shapes of a and weights differ.

>>> a = np.ones(5, dtype=np.float128)
>>> w = np.ones(5, dtype=np.complex64)
>>> avg = np.average(a, weights=w)
>>> print(avg.dtype)
complex256
```

With keepdims=True, the following result has shape (3, 1).

```
>>> np.average(data, axis=1, keepdims=True)
array([[0.5],
       [2.5],
       [4.5]])
```

7.17.3 Arithmetic mean: numpy.mean

npm.**mean**(*a*, *axis=None*, *dtype=None*, *out=None*, *keepdims=<no value>*, *, *where=<no value>*)

Compute the arithmetic mean along the specified axis.

See https://numpy.org/doc/stable/reference/generated/numpy.mean.html for details.

Returns the average of the array elements. The average is taken over the flattened array by default, otherwise over the specified axis. The arithmetic mean is the sum of the elements along the axis divided by the number of elements.

```
>>> a = np.array([[1, 2], [3, 4]])
>>> np.mean(a)
2.5
>>> np.mean(a, axis=0)
array([2., 3.])
>>> np.mean(a, axis=1)
array([1.5, 3.5])
```

In single precision, mean can be inaccurate:

```
>>> a = np.zeros((2, 512*512), dtype=np.float32)
>>> a[0, :] = 1.0
>>> a[1, :] = 0.1
>>> np.mean(a)
0.54999924
```

Computing the mean in float64 is more accurate:

```
>>> np.mean(a, dtype=np.float64)
0.55000000074505806 # may vary
```

Specifying a where argument:

```
>>> a = np.array([[5, 9, 13], [14, 10, 12], [11, 15, 19]])
>>> np.mean(a)
12.0
>>> np.mean(a, where=[[True], [False], [False]])
9.0
```

7.17.4 Variance: numpy.var

npm.**var**(*a*, *axis=None*, *dtype=None*, *out=None*, *ddof=0*, *keepdims=<no value>*, ***, *where=<no value>*, *mean=<no value>*, *correction=<no value>*)

Compute the variance along the specified axis.

See https://numpy.org/doc/stable/reference/generated/numpy.var.html for details.

Returns the variance of the array elements, a measure of the spread of a distribution. The variance is computed for the flattened array by default, otherwise over the specified axis.

The variance is the average of the squared deviations from the mean, i.e., var = mean(x), where x = abs(a - a.mean())**2.

The mean is typically calculated as x.sum() / N, where N = len(x). If, however, ddof is specified, the divisor N - ddof is used instead. In standard statistical practice, ddof=1 provides an unbiased estimator of the variance of a hypothetical infinite population. ddof=0 provides a maximum likelihood estimate of the variance for normally distributed variables.

Note that for complex numbers, the absolute value is taken before squaring, so that the result is always real and nonnegative.

For floating-point input, the variance is computed using the same precision the input has. Depending on the input data, this can cause the results to be inaccurate, especially for float32 (see example below). Specifying a higher-accuracy accumulator using the dtype keyword can alleviate this issue.

```
>>> a = np.array([[1, 2], [3, 4]])
>>> np.var(a)
1.25
>>> np.var(a, axis=0)
array([1.,  1.])
>>> np.var(a, axis=1)
array([0.25,  0.25])
```

In single precision, var() can be inaccurate:

```
>>> a = np.zeros((2, 512*512), dtype=np.float32)
>>> a[0, :] = 1.0
>>> a[1, :] = 0.1
>>> np.var(a)
0.20250003
```

Computing the variance in float64 is more accurate:

```
>>> np.var(a, dtype=np.float64)
0.20249999932944759 # may vary
>>> ((1-0.55)**2 + (0.1-0.55)**2)/2
0.2025
```

Specifying a where argument:

```
>>> a = np.array([[14, 8, 11, 10], [7, 9, 10, 11], [10, 15, 5, 10]])
>>> np.var(a)
6.833333333333333 # may vary
>>> np.var(a, where=[[True], [True], [False]])
4.0
```

7.18 Numpy mathematical functions: Matrix and vector products

7.18.1 Dot product: numpy.dot

npm.**dot**(*a*, *b*, *out=None*)

Compute the Dot product of two arrays. .

See https://numpy.org/doc/stable/reference/generated/numpy.dot.html#numpy.dot for details.

Dot product of two arrays. Specifically,

If both a and b are 1-D arrays, it is inner product of vectors (without complex conjugation).

If both a and b are 2-D arrays, it is matrix multiplication, but using matmul or a @ b is preferred.

If either a or b is 0-D (scalar), it is equivalent to multiply and using numpy.multiply(a, b) or a * b is preferred.

If a is an N-D array and b is a 1-D array, it is a sum product over the last axis of a and b.

If a is an N-D array and b is an M-D array (where M>=2), it is a sum product over the last axis of a and the second-to-last axis of b:

```
>>> np.dot(3, 4)
12
```

Neither argument is complex-conjugated:

```
np.dot([2j, 3j], [2j, 3j])
(-13+0j)
```

For 2-D arrays it is the matrix product:

```
a = [[1, 0], [0, 1]]
b = [[4, 1], [2, 2]]
np.dot(a, b)
array([[4, 1],
       [2, 2]])

a = np.arange(3*4*5*6).reshape((3,4,5,6))
b = np.arange(3*4*5*6)[::-1].reshape((5,4,6,3))
np.dot(a, b)[2,3,2,1,2,2]
499128
sum(a[2,3,2,:] * b[1,2,:,2])
499128
```

7.18.2 Dot product of two vectors: numpy.vdot

npm.**vdot**(*a*, *b*, */*)

Return the dot product of two vectors.

See https://numpy.org/doc/stable/reference/generated/numpy.vdot.html#numpy.vdot for details.

The vdot(a, b) function handles complex numbers differently than dot(a, b). If the first argument is complex the complex conjugate of the first argument is used for the calculation of the dot product.

Note that vdot handles multidimensional arrays differently than dot: it does not perform a matrix product, but flattens input arguments to 1-D vectors first. Consequently, it should only be used for vectors.

```
>>> a = np.array([1+2j,3+4j])
>>> b = np.array([5+6j,7+8j])
>>> np.vdot(a, b)
(70-8j)
```

(continues on next page)

(continued from previous page)

```
>>> np.vdot(b, a)
(70+8j)
```

Note that higher-dimensional arrays are flattened!

```
>>> a = np.array([[1, 4], [5, 6]])
>>> b = np.array([[4, 1], [2, 2]])
>>> np.vdot(a, b)
30
>>> np.vdot(b, a)
30
1*4 + 4*1 + 5*2 + 6*2
30
```

7.18.3 Inner product of two arrays: numpy.inner

npm.**inner**(*a*, *b*, */*)

Return the inner product of two arrays.

See https://numpy.org/doc/stable/reference/generated/numpy.inner.html#numpy.inner for details.

Ordinary inner product of vectors for 1-D arrays (without complex conjugation), in higher dimensions a sum product over the last axes.

For vectors (1-D arrays) it computes the ordinary inner-product:

```
np.inner(a, b) = sum(a[:]*b[:])
```

More generally, if ndim(a) = r > 0 and ndim(b) = s > 0:

```
np.inner(a, b) = np.tensordot(a, b, axes=(-1,-1))
```

or explicitly:

```
np.inner(a, b)[i0,...,ir-2,j0,...,js-2]
     = sum(a[i0,...,ir-2,:]*b[j0,...,js-2,:])
```

In addition a or b may be scalars, in which case:

```
np.inner(a,b) = a*b
```

Ordinary inner product for vectors:

```
>>> a = np.array([1,2,3])
>>> b = np.array([0,1,0])
>>> np.inner(a, b)
2
```

Some multidimensional examples:

```
>>> a = np.arange(24).reshape((2,3,4))
>>> b = np.arange(4)
>>> c = np.inner(a, b)
>>> c.shape
(2, 3)
>>> c
array([[ 14,  38,  62],
       [ 86, 110, 134]])

>>> a = np.arange(2).reshape((1,1,2))
```

(continues on next page)

(continued from previous page)

```
>>> b = np.arange(6).reshape((3,2))
>>> c = np.inner(a, b)
>>> c.shape
(1, 1, 3)
>>> c
array([[[1, 3, 5]]])
```

An example where b is a scalar:

```
>>> np.inner(np.eye(2), 7)
array([[7., 0.],
       [0., 7.]])
```

7.18.4 Outer product of two vectors: numpy.outer

npm.**outer**(*a*, *b*, *out=None*)

Compute the outer product of two vectors.

See https://numpy.org/doc/stable/reference/generated/numpy.outer.html#numpy.outer for details.

Given two vectors a and b of length M and N, repsectively, the outer product [1] is:

```
[[a_0*b_0  a_0*b_1 ... a_0*b_{N-1} ]
 [a_1*b_0    .
 [ ...          .
 [a_{M-1}*b_0            a_{M-1}*b_{N-1} ]]
```

Make a (very coarse) grid for computing a Mandelbrot set:

```
>>> rl = np.outer(np.ones((5,)), np.linspace(-2, 2, 5))
>>> rl
array([[-2., -1.,  0.,  1.,  2.],
       [-2., -1.,  0.,  1.,  2.],
       [-2., -1.,  0.,  1.,  2.],
       [-2., -1.,  0.,  1.,  2.],
       [-2., -1.,  0.,  1.,  2.]])
>>> im = np.outer(1j*np.linspace(2, -2, 5), np.ones((5,)))
>>> im
array([[0.+2.j, 0.+2.j, 0.+2.j, 0.+2.j, 0.+2.j],
       [0.+1.j, 0.+1.j, 0.+1.j, 0.+1.j, 0.+1.j],
       [0.+0.j, 0.+0.j, 0.+0.j, 0.+0.j, 0.+0.j],
       [0.-1.j, 0.-1.j, 0.-1.j, 0.-1.j, 0.-1.j],
       [0.-2.j, 0.-2.j, 0.-2.j, 0.-2.j, 0.-2.j]])
>>> grid = rl + im
>>> grid
array([[-2.+2.j, -1.+2.j,  0.+2.j,  1.+2.j,  2.+2.j],
       [-2.+1.j, -1.+1.j,  0.+1.j,  1.+1.j,  2.+1.j],
       [-2.+0.j, -1.+0.j,  0.+0.j,  1.+0.j,  2.+0.j],
       [-2.-1.j, -1.-1.j,  0.-1.j,  1.-1.j,  2.-1.j],
       [-2.-2.j, -1.-2.j,  0.-2.j,  1.-2.j,  2.-2.j]])
```

An example using a “vector” of letters:

```
>>> x = np.array(['a', 'b', 'c'], dtype=object)
>>> np.outer(x, [1, 2, 3])
array([['a', 'aa', 'aaa'],
       ['b', 'bb', 'bbb'],
       ['c', 'cc', 'ccc']], dtype=object)
```

7.18.5 Matrix product of two arrays: numpy.matmul

npm.**matmul**(*x1*, *x2*, */*, *out=None*, ***, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*)

Matrix product of two arrays.

See https://numpy.org/doc/stable/reference/generated/numpy.matmul.html#numpy.matmul for details.

The behavior depends on the arguments in the following way.

- If both arguments are 2-D they are multiplied like conventional matrices.
- If either argument is N-D, N > 2, it is treated as a stack of matrices residing in the last two indexes and broadcast accordingly.
- If the first argument is 1-D, it is promoted to a matrix by prepending a 1 to its dimensions. After matrix multiplication the prepended 1 is removed.
- If the second argument is 1-D, it is promoted to a matrix by appending a 1 to its dimensions. After matrix multiplication the appended 1 is removed.

`matmul` differs from `dot` in two important ways:

- Multiplication by scalars is not allowed, use `*` instead.
- Stacks of matrices are broadcast together as if the matrices were elements, respecting the signature `(n,k),(k,m)->(n,m)`:

```
>>> a = np.ones([9, 5, 7, 4])
>>> c = np.ones([9, 5, 4, 3])
>>> np.dot(a, c).shape
(9, 5, 7, 9, 5, 3)
>>> np.matmul(a, c).shape
(9, 5, 7, 3)
>>> # n is 7, k is 4, m is 3
```

The matmul function implements the semantics of the `@` operator introduced in Python 3.5 following PEP 465.

For 2-D arrays it is the matrix product:

```
>>> a = np.array([[1, 0], [0, 1]])
>>> b = np.array([[4, 1], [2, 2]])
>>> np.matmul(a, b)
array([[4, 1],
       [2, 2]])
```

For 2-D mixed with 1-D, the result is the usual.

```
>>> a = np.array([[1, 0], [0, 1]])
>>> b = np.array([1, 2])
>>> np.matmul(a, b)
array([1, 2])
>>> np.matmul(b, a)
array([1, 2])
```

Broadcasting is conventional for stacks of arrays

```
>>> a = np.arange(2 * 2 * 4).reshape((2, 2, 4))
>>> b = np.arange(2 * 2 * 4).reshape((2, 4, 2))
>>> np.matmul(a,b).shape
(2, 2, 2)
>>> np.matmul(a, b)[0, 1, 1]
98
>>> sum(a[0, 1, :] * b[0 , :, 1])
98
```

Vector, vector returns the scalar inner product, but neither argument is complex-conjugated:

```
>>> np.matmul([2j, 3j], [2j, 3j])
(-13+0j)
```

Scalar multiplication raises an error.

```
>>> np.matmul([1,2], 3)
Traceback (most recent call last):
...
ValueError: matmul: Input operand 1 does not have enough dimensions ...
```

The `@` operator can be used as a shorthand for `np.matmul` on ndarrays.

```
>>> x1 = np.array([2j, 3j])
x2 = np.array([2j, 3j])
>>> x1 @ x2
(-13+0j)
```

7.18.6 Tensor dot product: numpy.matmul

npm.**tensordot**(*a*, *b*, *axes=2*)

Compute tensor dot product along specified axes.

See https://numpy.org/doc/stable/reference/generated/numpy.tensordot.html#numpy.tensordot for details.

Given two tensors, a and b, and an array_like object containing two array_like objects, (a_axes, b_axes), sum the products of a's and b's elements (components) over the axes specified by a_axes and b_axes. The third argument can be a single non-negative integer_like scalar, N; if it is such, then the last N dimensions of a and the first N dimensions of b are summed over.

Three common use cases are:

- `axes = 0` : tensor product $a \otimes b$
- `axes = 1` : tensor dot product $a \cdot b$
- `axes = 2` : (default) tensor double contraction $a : b$

When axes is integer_like, the sequence for evaluation will be: first the -Nth axis in a and 0th axis in b, and the -1th axis in a and Nth axis in b last.

When there is more than one axis to sum over - and they are not the last (first) axes of a (b) - the argument axes should consist of two sequences of the same length, with the first axis to sum over given first in both sequences, the second axis second, and so forth.

The shape of the result consists of the non-contracted axes of the first tensor, followed by the non-contracted axes of the second.

A "traditional" example:

```
>>> a = np.arange(60.).reshape(3,4,5)
>>> b = np.arange(24.).reshape(4,3,2)
>>> c = np.tensordot(a,b, axes=([1,0],[0,1]))
>>> c.shape
(5, 2)
>>> c
array([[4400., 4730.],
       [4532., 4874.],
       [4664., 5018.],
       [4796., 5162.],
       [4928., 5306.]])
>>> # A slower but equivalent way of computing the same...
>>> d = np.zeros((5,2))
>>> for i in range(5):
```

(continues on next page)

(continued from previous page)

```
  for j in range(2):
    for k in range(3):
      for n in range(4):
        d[i,j] += a[k,n,i] * b[n,k,j]
>>> c == d
array([[ True,  True],
       [ True,  True],
       [ True,  True],
       [ True,  True],
       [ True,  True]])
```

An extended example taking advantage of the overloading of + and * :

```
>>> a = np.array(range(1, 9))
>>> a.shape = (2, 2, 2)
>>> A = np.array(('a', 'b', 'c', 'd'), dtype=object)
A.shape = (2, 2)
>>> a; A
array([[[1, 2],
        [3, 4]],
       [[5, 6],
        [7, 8]]])
array([['a', 'b'],
       ['c', 'd']], dtype=object)

>>> np.tensordot(a, A) # third argument default is 2 for double-contraction
array(['abbcccdddd', 'aaaaabbbbbbccccccdddddddd'], dtype=object)

>>> np.tensordot(a, A, 1)
array([[['acc', 'bdd'],
        ['aaacccc', 'bbbdddd']],
       [['aaaaacccccc', 'bbbbbddddddd'],
        ['aaaaaaaccccccc', 'bbbbbbbddddddd']]], dtype=object)

>>> np.tensordot(a, A, 0) # tensor product (result too long to incl.)
array([[[[['a', 'b'],
          ['c', 'd']],
          ...
>>> np.tensordot(a, A, (0, 1))
array([[['abbbbb', 'cddddd'],
        ['aabbbbbb', 'ccdddddd']],
       [['aaabbbbbbb', 'cccddddddd'],
        ['aaaabbbbbbbb', 'ccccddddddd']]], dtype=object)

>>> np.tensordot(a, A, (2, 1))
array([[['abb', 'cdd'],
        ['aaabbbb', 'cccdddd']],
       [['aaaaabbbbbb', 'ccccddddddd'],
        ['aaaaaaabbbbbbbb', 'cccccccddddddd']]], dtype=object)

>>> np.tensordot(a, A, ((0, 1), (0, 1)))
array(['abbbcccccddddddd', 'aabbbbccccccddddddddd'], dtype=object)

>>> np.tensordot(a, A, ((2, 1), (1, 0)))
array(['acccbbdddd', 'aaaaacccccccbbbbbbddddddddd'], dtype=object)
```

7.18.7 Einstein summation: numpy.einsum

npm.**einsum**(*subscripts*, **operands*, *out=None*, *dtype=None*, *order='K'*, *casting='safe'*, *optimize=False*)

Evaluates the Einstein summation convention on the operands.

See https://numpy.org/doc/stable/reference/generated/numpy.einsum.html#numpy.einsum for details.

Using the Einstein summation convention, many common multi-dimensional, linear algebraic array operations can be repre-

sented in a simple fashion. In implicit mode einsum computes these values.

In explicit mode, einsum provides further flexibility to compute other array operations that might not be considered classical Einstein summation operations, by disabling, or forcing summation over specified subscript labels.

Typically a 'greedy' algorithm is applied which empirical tests have shown returns the optimal path in the majority of cases. In some cases 'optimal' will return the superlative path through a more expensive, exhaustive search. For iterative calculations it may be advisable to calculate the optimal path once and reuse that path by supplying it as an argument. An example is given below.

See numpy.einsum_path for more details.

```
>>> a = np.arange(25).reshape(5,5)
>>> b = np.arange(5)
>>> c = np.arange(6).reshape(2,3)
```

Trace of a matrix:

```
>>> np.einsum('ii', a)
60
>>> np.einsum(a, [0,0])
60
>>> np.trace(a)
60
```

Extract the diagonal (requires explicit form):

```
>>> np.einsum('ii->i', a)
array([ 0,  6, 12, 18, 24])
>>> np.einsum(a, [0,0], [0])
array([ 0,  6, 12, 18, 24])
>>> np.diag(a)
array([ 0,  6, 12, 18, 24])
```

Sum over an axis (requires explicit form):

```
>>> np.einsum('ij->i', a)
array([ 10,  35,  60,  85, 110])
>>> np.einsum(a, [0,1], [0])
array([ 10,  35,  60,  85, 110])
>>> np.sum(a, axis=1)
array([ 10,  35,  60,  85, 110])
```

For higher dimensional arrays summing a single axis can be done with ellipsis:

```
>>> np.einsum('...j->...', a)
array([ 10,  35,  60,  85, 110])
>>> np.einsum(a, [Ellipsis,1], [Ellipsis])
array([ 10,  35,  60,  85, 110])
```

7.18.8 Kronecker product: numpy.kron

npm.**kron**(a, b)

Kronecker product of two arrays.

numpy.kron

https://numpy.org/doc/stable/reference/generated/numpy.kron.html#numpy.kron

Computes the Kronecker product, a composite array made of blocks of the second array scaled by the first.

The function assumes that the number of dimensions of a and b are the same, if necessary prepending the smallest with ones. If a.shape = (r0,r1,..,rN) and b.shape = (s0,s1,...,sN), the Kronecker product has shape (r0*s0, r1*s1, ..., rN*SN). The elements are products of elements from a and b, organized explicitly by:

```
kron(a,b)[k0,k1,...,kN] = a[i0,i1,...,iN] * b[j0,j1,...,jN]
```

where:

```
kt = it * st + jt,  t = 0,...,N
```

In the common 2-D case (N=1), the block structure can be visualized:

```
[[ a[0,0]*b,   a[0,1]*b,  ... , a[0,-1]*b  ],
 [  ...                              ...   ],
 [ a[-1,0]*b,  a[-1,1]*b, ... , a[-1,-1]*b ]]
```

Further examples:

```
>>> np.kron([1,10,100], [5,6,7])
array([  5,   6,   7, ..., 500, 600, 700])
>>> np.kron([5,6,7], [1,10,100])
array([  5,  50, 500, ...,   7,  70, 700])

>>> np.kron(np.eye(2), np.ones((2,2)))
array([[1.,  1.,  0.,  0.],
       [1.,  1.,  0.,  0.],
       [0.,  0.,  1.,  1.],
       [0.,  0.,  1.,  1.]])

>>> a = np.arange(100).reshape((2,5,2,5))
>>> b = np.arange(24).reshape((2,3,4))
>>> c = np.kron(a,b)
>>> c.shape
(2, 10, 6, 20)
>>> I = (1,3,0,2)
>>> J = (0,2,1)
>>> J1 = (0,) + J             # extend to ndim=4
>>> S1 = (1,) + b.shape
>>> K = tuple(np.array(I) * np.array(S1) + np.array(J1))
c[K] == a[I]*b[J]
True
```

7.18.9 Discrete, linear convolution: numpy.convolve

npm.**convolve**(*a*, *v*, *mode='full'*)

Returns the discrete, linear convolution of two one-dimensional sequences.

For a detailed description of parameters and return values see:

https://numpy.org/doc/stable/reference/generated/numpy.convolve.html

See also: Wikipedia, “Convolution”, https://en.wikipedia.org/wiki/Convolution

Returns the discrete, linear convolution of two one-dimensional sequences.

The convolution operator is often seen in signal processing, where it models the effect of a linear time-invariant system on a signal [1]. In probability theory, the sum of two independent random variables is distributed according to the convolution of their individual distributions.

If v is longer than a, the arrays are swapped before computation.

The discrete convolution operation is defined as

$$(a * v)_n = \sum_{m=-\infty}^{\infty} a_m v_{n-m}$$

It can be shown that a convolution $x(t) * y(t)$ in time/space is equivalent to the multiplication $X(f)Y(f)$ in the Fourier domain, after appropriate padding (padding is necessary to prevent circular convolution). Since multiplication is more efficient (faster) than convolution, the function `scipy.signal.fftconvolve` exploits the FFT to calculate the convolution of large data-sets.

Note how the convolution operator flips the second array before "sliding" the two across one another:

```
>>> import numpy as np; from xlcalcnet import mpm, dpm
>>> np.convolve([1, 2, 3], [0, 1, 0.5])
array([0. , 1. , 2.5, 4. , 1.5])
```

Only return the middle values of the convolution. Contains boundary effects, where zeros are taken into account:

```
>>> np.convolve([1,2,3],[0,1,0.5], 'same')
array([1. ,  2.5,  4. ])
```

The two arrays are of the same length, so there is only one position where they completely overlap:

```
>>> np.convolve([1,2,3],[0,1,0.5], 'valid')
array([2.5])
```

7.19 Numpy logical functions: Truth value testing

7.19.1 Test whether all array elements evaluate to True.: numpy.all, ctx.all

npm.**all**(*a*, *axis=None*, *out=None*, *keepdims=<no value>*, ***, *where=<no value>*)

Test whether all array elements along a given axis evaluate to True.

For a detailed description of parameters and return values see:

https://numpy.org/doc/stable/reference/generated/numpy.all.html#numpy.all

Not a Number (NaN), positive infinity and negative infinity evaluate to True because these are not equal to zero

```
>>> import numpy as np; from xlcalcnet import mpm, dpm
>>> np.all([[True,False],[True,True]])
False

>>> np.all([[True,False],[True,True]], axis=0)
array([ True, False])

np.all([-1, 4, 5])
True

>>> np.all([1.0, np.nan])
True

>>> np.all([[True, True], [False, True]], where=[[True], [False]])
True

>>> o=np.array(False)
>>> z=np.all([-1, 4, 5], out=o)
>>> id(z), id(o), z
(28293632, 28293632, array(True)) # may vary
```

7.19.2 Test whether any array element evaluates to True: numpy.any, ctx.any

npm.**any**(*a*, *axis=None*, *out=None*, *keepdims=<no value>*, ***, *where=<no value>*)

Test whether any array element along a given axis evaluates to True.

For a detailed description of parameters and return values see:

https://numpy.org/doc/stable/reference/generated/numpy.any.html#numpy.any

Returns single boolean if axis is None. Not a Number (NaN), positive infinity and negative infinity evaluate to True because these are not equal to zero.

```
>>> import numpy as np; from xlcalcnet import mpm, dpm
>>> np.any([[True, False], [True, True]])
True

>>> np.any([[True, False], [False, False]], axis=0)
array([ True, False])

>>> np.any([-1, 0, 5])
True

>>> np.any(np.nan)
True

>>> np.any([[True, False], [False, False]], where=[[False], [True]])
False

>>> o=np.array(False)
```

(continues on next page)

(continued from previous page)

```
>>> z=np.any([-1, 4, 5], out=o)
>>> z, o
(array(True), array(True))
>>> # Check now that z is a reference to o
>>> z is o
True
>>> id(z), id(o) # identity of z and o
(191614240, 191614240)
```

7.19.3 Logical AND: numpy.logical_and, ctx.logical_and

npm.**logical_and**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*)

Compute the truth value of x1 AND x2 element-wise.

numpy.logical_and, **ctx.logical_and**

For a detailed description of parameters and return values see:

https://numpy.org/doc/stable/reference/generated/numpy.logical_and.html#numpy.logical_and

```
>>> import numpy as np; from xlcalcnet import mpm, dpm
>>> np.logical_and(True, False)
False
>>> np.logical_and([True, False], [False, False])
array([False, False])

>>> x = np.arange(5)
>>> np.logical_and(x>1, x<4)
array([False, False,  True,  True, False])
```

The & operator can be used as a shorthand for np.logical_and on boolean ndarrays.

```
>>> a = np.array([True, False])
>>> b = np.array([False, False])
>>> a & b
array([False, False])
```

7.19.4 Logical OR: numpy.logical_or, ctx.logical_or

npm.**logical_or**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*)

Compute the truth value of x1 OR x2 element-wise.

For a detailed description of parameters and return values see:

https://numpy.org/doc/stable/reference/generated/numpy.logical_or.html#numpy.logical_or

```
>>> import numpy as np; from xlcalcnet import mpm, dpm
>>> np.logical_or(True, False)
True
>>> np.logical_or([True, False], [False, False])
array([ True, False])

>>> x = np.arange(5)
>>> np.logical_or(x < 1, x > 3)
array([ True, False, False, False,  True])
```

The | operator can be used as a shorthand for np.logical_or on boolean ndarrays.

```
>>> a = np.array([True, False])
>>> b = np.array([False, False])
```

(continues on next page)

(continued from previous page)

```
>>> a | b
array([ True, False])
```

7.19.5 Logical XOR: numpy.logical_xor, ctx.logical_xor

npm.**logical_xor**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*)

Compute the truth value of x1 XOR x2, element-wise.

numpy.logical_xor, **ctx.logical_xor**

For a detailed description of parameters and return values see:

https://numpy.org/doc/stable/reference/generated/numpy.logical_xor.html#numpy.logical_xor

```
>>> import numpy as np; from xlcalcnet import mpm, dpm
>>> np.logical_xor(True, False)
True
>>> np.logical_xor([True, True, False, False], [True, False, True, False])
array([False,  True,  True, False])

>>> x = np.arange(5)
>>> np.logical_xor(x < 1, x > 3)
array([ True, False, False, False,  True])
```

Simple example showing support of broadcasting

```
>>> np.logical_xor(0, np.eye(2))
array([[ True, False],
       :cite:t:`False,  True]])
```

7.19.6 Testing array equality: numpy.array_equal, ctx.array_equal

npm.**array_equal**(*a1*, *a2*, *equal_nan=False*)

True if two arrays have the same shape and elements, False otherwise.

For a detailed description of parameters and return values see:

https://numpy.org/doc/stable/reference/generated/numpy.array_equal.html#numpy.array_equal

```
>>> import numpy as np; from xlcalcnet import mpm, dpm
>>> np.array_equal([1, 2], [1, 2])
True
>>> np.array_equal(np.array([1, 2]), np.array([1, 2]))
True
>>> np.array_equal([1, 2], [1, 2, 3])
False
>>> np.array_equal([1, 2], [1, 4])
False
>>> a = np.array([1, np.nan])
>>> np.array_equal(a, a)
False
>>> np.array_equal(a, a, equal_nan=True)
True
```

When equal_nan is True, complex values with nan components are considered equal if either the real or the imaginary components are nan.

```
>>> a = np.array([1 + 1j])
>>> b = a.copy()
>>> a.real = np.nan
```

(continues on next page)

(continued from previous page)

```
>>> b.imag = np.nan
>>> np.array_equal(a, b, equal_nan=True)
True
```

7.19.7 Testing array array_equivalence: numpy.array_equiv, ctx.array_equiv

npm.**array_equiv**(*a1*, *a2*)

True if two arrays have the same shape and elements, False otherwise.

For a detailed description of parameters and return values see:

https://numpy.org/doc/stable/reference/generated/numpy.array_equiv.html#numpy.array_equiv

Returns True if input arrays are shape consistent and all elements equal. Shape consistent means they are either the same shape, or one input array can be broadcasted to create the same shape as the other one.

```
>>> import numpy as np; from xlcalcnet import mpm, dpm
>>> np.array_equiv([1, 2], [1, 2])
True
>>> np.array_equiv([1, 2], [1, 3])
False
```

Showing the shape equivalence:

```
>>> np.array_equiv([1, 2], [[1, 2], [1, 2]])
True
>>> np.array_equiv([1, 2], [[1, 2, 1, 2], [1, 2, 1, 2]])
False
>>> np.array_equiv([1, 2], [[1, 2], [1, 3]])
False
```

7.19.8 Truth value of (x1 > x2) element-wise: numpy.greater, ctx.greater

npm.**greater**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*)

Return the truth value of (x1 > x2) element-wise.

For a detailed description of parameters and return values see:

https://numpy.org/doc/stable/reference/generated/numpy.greater_equal.html#numpy.greater

```
>>> import numpy as np; from xlcalcnet import mpm, dpm
>>> np.greater_equal([4, 2, 1], [2, 2, 2])
array([ True, True, False])
```

The > operator can be used as a shorthand for `np.greater_equal` on ndarrays.

```
>>> a = np.array([4, 2, 1])
>>> b = np.array([2, 2, 2])
>>> a > b
array([ True,  True, False])
```

7.19.9 Truth value of (x1 >= x2) element-wise: numpy.greater_equal, ctx.greater_equal

npm.**greater_equal**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*)

Return the truth value of (x1 >= x2) element-wise.

For a detailed description of parameters and return values see:

https://numpy.org/doc/stable/reference/generated/numpy.greater_equal.html#numpy.greater_equal

```
>>> import numpy as np; from xlcalcnet import mpm, dpm
>>> np.greater_equal([4, 2, 1], [2, 2, 2])
array([ True, True, False])
```

The >= operator can be used as a shorthand for `np.greater_equal` on ndarrays.

```
>>> a = np.array([4, 2, 1])
>>> b = np.array([2, 2, 2])
>>> a >= b
array([ True,  True, False])
```

7.19.10 Truth value of (x1 < x2) element-wise: numpy.less, ctx.less

npm.**less**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*)

Return the truth value of (x1 < x2) element-wise.

For a detailed description of parameters and return values see:

https://numpy.org/doc/stable/reference/generated/numpy.less.html#numpy.less

```
>>> import numpy as np; from xlcalcnet import mpm, dpm
>>> np.less([1, 2], [2, 2])
array([ True, False])
```

The < operator can be used as a shorthand for `np.less` on ndarrays.

```
>>> a = np.array([1, 2])
>>> b = np.array([2, 2])
>>> a < b
array([ True, False])
```

7.19.11 Truth value of (x1 <= x2) element-wise: numpy.less_equal, ctx.less_equal

npm.**less_equal**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*)

Return the truth value of (x1 <= x2) element-wise.

For a detailed description of parameters and return values see:

https://numpy.org/doc/stable/reference/generated/numpy.less_equal.html#numpy.less_equal

```
>>> import numpy as np; from xlcalcnet import mpm, dpm
>>> np.less_equal([4, 2, 1], [2, 2, 2])
array([False,  True,  True])
```

The <= operator can be used as a shorthand for `np.less_equal` on ndarrays.

```
>>> a = np.array([4, 2, 1])
>>> b = np.array([2, 2, 2])
>>> a <= b
array([False,  True,  True])
```

7.19.12 Truth value of (x1 == x2) element-wise: numpy.equal, ctx.equal

npm.**equal**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*)

Return the truth value of (x1 == x2) element-wise.

For a detailed description of parameters and return values see:

https://numpy.org/doc/stable/reference/generated/numpy.equal.html#numpy.equal

```
>>> import numpy as np; from xlcalcnet import mpm, dpm
>>> np.equal([0, 1, 3], np.arange(3))
array([ True,  True, False])
```

What is compared are values, not types. So an `int(1)` and an array of length one can evaluate as True:

```
>>> np.equal(1, np.ones(1))
array([ True])
```

The == operator can be used as a shorthand for `np.equal` on ndarrays.

```
>>> a = np.array([2, 4, 6])
>>> b = np.array([2, 4, 2])
>>> a == b
array([ True,  True, False])
```

7.19.13 Truth value of (x1 != x2) element-wise: numpy.equal, ctx.equal

npm.**not_equal**(*x1*, *x2*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*)

Return the truth value of (x1 != x2) element-wise.

For a detailed description of parameters and return values see:

https://numpy.org/doc/stable/reference/generated/numpy.not_equal.html#numpy.not_equal

```
>>> import numpy as np; from xlcalcnet import mpm, dpm
>>> np.not_equal([1.,2.], [1., 3.])
array([False,  True])
>>> np.not_equal([1, 2], [[1, 3],[1, 4]])
array([[False,  True],
       :cite:t:`False,  True]])
```

The != operator can be used as a shorthand for `np.not_equal` on ndarrays.

```
>>> a = np.array([1., 2.])
>>> b = np.array([1., 3.])
>>> a != b
array([False,  True])
```

7.20 Numpy mathematical functions: Integer and fractional

7.20.1 Floor of the input, element-wise.: numpy.floor, ctx.floor

npm.**floor**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*)

Return the floor of the input, element-wise.

https://numpy.org/doc/stable/reference/generated/numpy.floor.html

Some spreadsheet programs calculate the "floor-towards-zero", where floor(-2.5) == -2. NumPy instead uses the definition of floor where floor(-2.5) == -3. The "floor-towards-zero" function is called fix in NumPy.

```
>>> a = np.array([-1.7, -1.5, -0.2, 0.2, 1.5, 1.7, 2.0])
>>> np.floor(a)
array([-2., -2., -1.,  0.,  1.,  1.,  2.])
```

From mpmath. See also Mpmath [669].

!!! 'MPIntervalContext' object has no attribute 'floor' !!!

Computes the floor of x, $\lfloor x \rfloor$, defined as the largest integer less than or equal to x:

Example:

```
>>> from xlcalcnet import mp, iv, fp, dp, gp, ap
>>> mp.dps = 15; mp.pretty = False
>>> x = 3.5
>>> fp.floor(x), mp.floor(x), dp.floor(x), gp.floor(x), ap.floor(x)
(3, mpf('3.0'), Decimal('3'), mpfr('3.0'), arb3_t('3.00000000000000'))
```

Note

floor(), *ceil()* and `nint()` return a floating-point number, not a Python `int`. If $\lfloor x \rfloor$ is too large to be represented exactly at the present working precision, the result will be rounded, not necessarily in the direction implied by the mathematical definition of the function.

To avoid rounding, use *prec=0*:

```
>>> mp.dps = 15
>>> print(int(floor(10**30+1)))
1000000000000000019884624838656
>>> print(int(floor(10**30+1, prec=0)))
1000000000000000000000000000001
```

The floor function is defined for complex numbers and acts on the real and imaginary parts separately:

```
>>> x = 3.25+4.75j
>>> fp.floor(x), mp.floor(x), dp.floor(x), gp.floor(x), ap.floor(x)
((3+4j),
 mpc(real='3.0', imag='4.0'),
 DecCplx('3 + 4j'),
 mpc('3.0+4.0j'),
 acb3_t('3.00000000000000 + 4.00000000000000j'))
```

7.20.2 Ceiling of the input, element-wise.: numpy.ceil, ctx.ceil

npm.**ceil**(*x*, */*, *out=None*, ***, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*)

Return the ceiling of the input, element-wise.

https://numpy.org/doc/stable/reference/generated/numpy.ceil.html

```
>>> a = np.array([-1.7, -1.5, -0.2, 0.2, 1.5, 1.7, 2.0])
>>> np.ceil(a)
array([-1., -1., -0.,  1.,  2.,  2.,  2.])
```

From mpmath. See also Mpmath [663].

Computes the ceiling of x, $\lceil x \rceil$, defined as the smallest integer greater than or equal to x:

Example:

```
>>> from xlcalcnet import mp, iv, fp, dp, gp, ap
>>> mp.dps = 15; mp.pretty = False
>>> x = 3.5
>>> fp.ceil(x), mp.ceil(x), dp.ceil(x), gp.ceil(x), ap.ceil(x)
(4, mpf('4.0'), Decimal('4'), mpfr('4.0'), arb3_t('4.00000000000000'))
```

The ceiling function is defined for complex numbers and acts on the real and imaginary parts separately:

```
>>> x = 3.25+4.75j
>>> fp.ceil(x), mp.ceil(x), dp.ceil(x), gp.ceil(x), ap.ceil(x)
((4+5j),
 mpc(real='4.0', imag='5.0'),
 DecCplx('4 + 5j'),
 mpc('4.0+5.0j'),
 acb3_t('4.00000000000000 + 5.00000000000000j'))
```

7.20.3 Truncated value of the input, element-wise.: numpy.trunc, ctx.trunc

npm.**trunc**(*x*, */*, *out=None*, *, *where=True*, *casting='same_kind'*, *order='K'*, *dtype=None*, *subok=True*)

Return the truncated value of the input, element-wise.

https://numpy.org/doc/stable/reference/generated/numpy.trunc.html

The truncated value of the scalar x is the nearest integer i which is closer to zero than x is. In short, the fractional part of the signed number x is discarded.

not working with mpm and ipm: trunc

```
>>> a = np.array([-1.7, -1.5, -0.2, 0.2, 1.5, 1.7, 2.0])
>>> np.trunc(a)
array([-1., -1., -0.,  0.,  1.,  1.,  2.])
```

7.20.4 Fix value of the input, element-wise.: numpy.fix, ctx.fix

npm.**fix**(*x*, *out=None*)

Round to nearest integer towards zero.

https://numpy.org/doc/stable/reference/generated/numpy.fix.html

Round an array of floats element-wise to nearest integer towards zero.

```
>>> np.fix(3.14)
3.0
>>> np.fix(3)
3.0
>>> np.fix([2.1, 2.9, -2.1, -2.9])
array([ 2.,  2., -2., -2.])
```

7.21 Numpy mathematical functions: Miscellaneous

7.21.1 Random Generator

Some text

https://numpy.org/doc/stable/reference/random/generator.html#accessing-the-bitgenerator-and-spawning

ctx.rand

From mpmath. See also Mpmath [685].

!!! AttributeError: 'MPIntervalContext' object has no attribute 'rand' !!

Returns an `mpf` with value chosen randomly from $[0, 1)$. The number of randomly generated bits in the mantissa is equal to the working precision.

Examples:

```
>>> from xlcalcnet import fp, mp, iv, dp, gp, ap
>>> mp.dps = iv.dps = dp.dps = gp.dps = ap.dps = 45;
>>> for ctx in [fp, mp, dp, gp, ap]: print(repr(ctx.rand()))
0.6379004385592022
mpf('0.22530711244873659663745003088710468813066280856')
Decimal('0.2572014323118752')
mpfr('0.47800233849533735330794570472789928317070007324 2',153)
arb3_t('[0.90060710732460602656601622584275901317596435 5 +/- 4.69e-46]')
```

7.21.2 Vectorization of a function: numpy.vectorize

npm.vectorize(*pyfunc=np._NoValue*, *otypes=None*, *doc=None*, *excluded=None*, *cache=False*, *signature=None*)

Returns an object that acts like pyfunc, but takes arrays as input.

https://numpy.org/doc/stable/reference/generated/numpy.vectorize.html#numpy-vectorize

Define a vectorized function which takes a nested sequence of objects or numpy arrays as inputs and returns a single numpy array or a tuple of numpy arrays. The vectorized function evaluates pyfunc over successive tuples of the input arrays like the python map function, except it uses the broadcasting rules of numpy.

The data type of the output of vectorized is determined by calling the function with the first element of the input. This can be avoided by specifying the otypes argument.

```
>>> import numpy as np
>>> def myfunc(a, b):
... "Return a-b if a>b, otherwise return a+b"
... if a > b:
...     return a - b
... else:
...     return a + b

>>> vfunc = np.vectorize(myfunc)
>>> vfunc([1, 2, 3, 4], 2)
array([3, 4, 1, 2])
```

The docstring is taken from the input function to vectorize unless it is specified:

```
>>> vfunc.__doc__
'Return a-b if a>b, otherwise return a+b'
>>> vfunc = np.vectorize(myfunc, doc='Vectorized `myfunc`')
>>> vfunc.__doc__
'Vectorized `myfunc`'
```

The output type is determined by evaluating the first element of the input, unless it is specified:

```
>>> out = vfunc([1, 2, 3, 4], 2)
>>> type(out[0])
<class 'numpy.int64'>
>>> vfunc = np.vectorize(myfunc, otypes=[float])
>>> out = vfunc([1, 2, 3, 4], 2)
>>> type(out[0])
<class 'numpy.float64'>
```

The excluded argument can be used to prevent vectorizing over certain arguments. This can be useful for array-like arguments of a fixed length such as the coefficients for a polynomial as in polyval:

```
>>> def mypolyval(p, x):
...     _p = list(p)
...     res = _p.pop(0)
...     while _p:
...         res = res*x + _p.pop(0)
...     return res
```

Here, we exclude the zeroth argument from vectorization whether it is passed by position or keyword.

```
>>> vpolyval = np.vectorize(mypolyval, excluded={0, 'p'})
>>> vpolyval([1, 2, 3], x=[0, 1])
array([3, 6])
>>> vpolyval(p=[1, 2, 3], x=[0, 1])
array([3, 6])
```

7.22 Summary and examples: Numpy utility functions

7.22.1 Exact mathematical constants

ctx.zero

Returns zero.

```
>>> from xlcalcnet import fpm, mpm, ipm, dec, gmp, apm; ctxall = [fpm, mpm, ipm, dec, gmp, apm]
>>> for ctx in ctxall: print(repr(ctx.zero))
0.0
mpf('0.0')
mpi('0.0', '0.0')
Decimal('0')
mpfr('0.0')
arb('0')
```

ctx.one

Returns one.

```
>>> from xlcalcnet import fpm, mpm, ipm, dec, gmp, apm; ctxall = [fpm, mpm, ipm, dec, gmp, apm]
>>> for ctx in ctxall: print(repr(ctx.one))
1.0
mpf('1.0')
mpi('1.0', '1.0')
Decimal('1')
mpfr('1.0')
arb('1.00')
```

ctx.j

Returns the imaginary unit.

```
>>> from xlcalcnet import fpm, mpm, ipm, dec, gmp, apm; ctxall = [fpm, mpm, ipm, dec, gmp, apm]
>>> for ctx in ctxall: print(repr(ctx.j))
1j
mpc(real='0.0', imag='1.0')
iv.mpc(mpi('0.0', '0.0'), mpi('1.0', '1.0'))
DecCplx('0 + 1j')
mpc('0.0+1.0j')
acb('0 + 1.00j')
```

ctx.inf

Returns positive infinity.

```
>>> from xlcalcnet import fpm, mpm, ipm, dec, gmp, apm; ctxall = [fpm, mpm, ipm, dec, gmp, apm]
>>> for ctx in ctxall: print(repr(ctx.inf))
inf
mpf('+inf')
mpi('+inf', '+inf')
Decimal('Infinity')
mpfr('inf')
arb('+inf')
```

ctx.ninf

Returns negative infinity.

```
>>> from xlcalcnet import fpm, mpm, ipm, dec, gmp, apm; ctxall = [fpm, mpm, ipm, dec, gmp, apm]
>>> for ctx in ctxall: print(repr(ctx.ninf))
-inf
mpf('-inf')
```

(continues on next page)

(continued from previous page)

```
mpi('-inf', '-inf')
Decimal('-Infinity')
mpfr('-inf')
arb('-inf')
```

ctx.nan

Returns Not-a-Number (NaN).

```
>>> from xlcalcnet import fpm, mpm, ipm, dec, gmp, apm; ctxall = [fpm, mpm, ipm, dec, gmp, apm]
>>> for ctx in ctxall: print(repr(ctx.nan))
nan
mpf('nan')
mpi('nan', 'nan')
Decimal('NaN')
mpfr('nan')
arb('nan')
```

7.22.2 Complex components

numpy.real, **ctx.real**, **ctx.re**

For a detailed description of parameters and return values see:

https://numpy.org/doc/stable/reference/generated/numpy.real.html#numpy.real

Return the real part of the complex argument.

```
>>> import numpy as np; from xlcalcnet import mpm, dpm
>>> np.real(1 + 1j)
1.0
>>> a = np.array([1+2j, 3+4j, 5+6j])
>>> np.real(a)
array([1.,  3.,  5.])
```

From mpmath See also Mpmath [675].

Returns the real part of x, $\Re(x)$. `re()` converts a non-mpmath number to an mpmath number:

```
>>> from xlcalcnet import mp, iv, fp, dp, gp, ap
>>> mp.dps = 15; mp.pretty = False
>>> x = 3
>>> fp.re(x), mp.re(x), iv.re(x), dp.re(x), gp.re(x), ap.re(x)
(3.0,
 mpf('3.0'),
 mpi('3.0', '3.0'),
 Decimal('3'),
 mpfr('3.0'),
 arb3_t('3.00000000000000'))

>>> x = -1+4j
>>> fp.re(x), mp.re(x), iv.re(x), dp.re(x), gp.re(x), ap.re(x)
(-1.0,
 mpf('-1.0'),
 mpi('-1.0', '-1.0'),
 Decimal('-1'),
 mpfr('-1.0'),
 arb3_t('-1.00000000000000'))
```

numpy.imag, **ctx.imag**, **ctx.im**

For a detailed description of parameters and return values see:

https://numpy.org/doc/stable/reference/generated/numpy.imag

Return the imaginary part of the complex argument.

```
>>> import numpy as np; from xlcalcnet import mpm, dpm
>>> np.imag(1 + 1j)
1.0
>>> a = np.array([1+2j, 3+4j, 5+6j])
>>> np.imag(a)
array([2.,  4.,  6.])
```

From mpmath. See also Mpmath [670].

Returns the imaginary part of x, $\Im(x)$. `im()` converts a non-mpmath number to an mpmath number:

```
>>> from xlcalcnet import mp, iv, fp, dp, gp, ap
>>> mp.dps = 15; mp.pretty = False
>>> x = 3
>>> fp.im(x), mp.im(x), iv.im(x), dp.im(x), gp.im(x), ap.im(x)
(0.0, mpf('0.0'), mpi('0.0', '0.0'), Decimal('0'), mpfr('0.0'), arb3_t('0'))

>>> x = -1+4j
>>> fp.im(x), mp.im(x), iv.im(x), dp.im(x), gp.im(x), ap.im(x)
(4.0,
 mpf('4.0'),
 mpi('4.0', '4.0'),
 Decimal('4.0'),
 mpfr('4.0'),
 arb3_t('4.00000000000000'))
```

numpy.absolute, **numpy.abs**, **ctx.fabs**

https://numpy.org/doc/stable/reference/generated/numpy.absolute.html

See also: https://numpy.org/doc/stable/reference/generated/numpy.fabs.html

Calculate the absolute value of x, $|x|$, element-wise.

```
>>> x = np.array([-1.2, 1.2])
>>> np.absolute(x)
array([ 1.2,  1.2])
>>> np.absolute(1.2 + 1j)
1.5620499351813308
```

The abs function can be used as a shorthand for np.absolute on ndarrays.

```
>>> x = np.array([-1.2, 1.2])
>>> abs(x)
array([1.2, 1.2])
```

From mpmath. See also Mpmath [661].

```
>>> from xlcalcnet import mp, iv, fp, dp, gp, ap
>>> fp.fabs(3), mp.fabs(3), iv.fabs(3), dp.fabs(3), gp.fabs(3), ap.fabs(3)
(3.0, mpf('3.0'), mpi('3.0', '3.0'), Decimal('3'), 3, 3)
>>> fp.fabs(-3), mp.fabs(-3), iv.fabs(-3), dp.fabs(-3), gp.fabs(-3), ap.fabs(-3)
(3.0, mpf('3.0'), mpi('3.0', '3.0'), Decimal('3'), 3, 3)
>>> fp.fabs(3+4j), mp.fabs(3+4j), iv.fabs(3+4j), dp.fabs(3+4j), gp.fabs(3+4j), ap.fabs(3+4j)
(5.0, mpf('5.0'), mpi('5.0', '5.0'), Decimal('5.0'), 5.0, 5.0)
```

numpy.angle, **ctx.angle**, **ctx.arg**, **ctx.phase**

For a detailed description of parameters and return values see:

https://numpy.org/doc/stable/reference/generated/numpy.angle.html

Return the angle of the complex argument. Although the angle of the complex number 0 is undefined, numpy.angle(0) returns the value 0.

```
>>> import numpy as np; from xlcalcnet import mpm, dpm
>>> np.angle([1.0, 1.0j, 1+1j])               # in radians
array([ 0.        ,  1.57079633,  0.78539816]) # may vary
>>> np.angle(1+1j, deg=True)                  # in degrees
45.0
```

From mpmath. See also Mpmath [664].

Example:

```
>>> from xlcalcnet import mp, iv, fp, dp, gp, ap
>>> mp.dps = 15; mp.pretty = True
>>> x = 3
>>> fp.arg(x), mp.arg(x), iv.arg(x), dp.arg(x), gp.arg(x), ap.arg(x)
(0.0, mpf('0.0'), mpi('0.0', '0.0'), Decimal('0.0'), mpfr('0.0'), arb3_t('0'))

>>> x = 3+3j
>>> fp.arg(x), mp.arg(x), iv.arg(x), dp.arg(x), gp.arg(x), ap.arg(x)
(0.7853981633974483,
 mpf('0.78539816339744828'),
 mpi('0.78539816339744828', '0.78539816339744839'),
 Decimal('0.785398163397448'),
 mpfr('0.78539816339744828'),
 arb3_t('[0.785398163397448 +/- 3.35e-16]'))

>>> x = 3j
>>> fp.arg(x), mp.arg(x), iv.arg(x), dp.arg(x), gp.arg(x), ap.arg(x)
(1.5707963267948966,
 mpf('1.5707963267948966'),
 mpi('1.5707963267948966', '1.5707963267948968'),
 Decimal('1.5707963267949'),
 mpfr('1.5707963267948966'),
 arb3_t('[1.57079632679490 +/- 3.56e-15]'))

>>> x = -3
>>> fp.arg(x), mp.arg(x), iv.arg(x), dp.arg(x), gp.arg(x), ap.arg(x)
(3.141592653589793,
 mpf('3.1415926535897931'),
 mpi('3.1415926535897931', '3.1415926535897936'),
 Decimal('3.14159265358979'),
 mpfr('3.1415926535897931'),
 arb3_t('[3.14159265358979 +/- 3.34e-15]'))
```

The angle is defined to satisfy $-\pi < \arg(x) \leq \pi$ and with the sign convention that a nonnegative imaginary part results in a nonnegative argument.

The value returned by `arg()` is an `mpf` instance.

numpy.sign, **ctx.sign**

For a detailed description of parameters and return values see:

https://numpy.org/doc/stable/reference/generated/numpy.sign.html

Returns an element-wise indication of the sign of a number.

The sign function returns -1 if x < 0, 0 if x==0, 1 if x > 0. nan is returned for nan inputs.

For complex inputs, the sign function returns sign(x.real) + 0j if x.real != 0 else sign(x.imag) + 0j.

complex(nan, 0) is returned for complex nan inputs.

```
>>> np.sign([-5., 4.5])
array([-1.,  1.])
>>> np.sign(0)
0
```

(continues on next page)

(continued from previous page)

```
>>> np.sign(5-2j)
(1+0j)
```

From mpmath. See also Mpmath [676].

Returns the sign of x, defined as $\mathrm{sign}(x) = x/|x|$ (with the special case $\mathrm{sign}(0) = 0$):

```
>>> from xlcalcnet import mp, iv, fp, dp, gp, ap
>>> mp.dps = 15; mp.pretty = False
>>> x = 10
>>> fp.sign(x), mp.sign(x), iv.sign(x), dp.sign(x), gp.sign(x), ap.sign(x)
(1.0,
 mpf('1.0'),
 mpi('1.0', '1.0'),
 Decimal('1'),
 1,
 arb3_t('1.00000000000000'))

>>> x = -10
>>> fp.sign(x), mp.sign(x), iv.sign(x), dp.sign(x), gp.sign(x), ap.sign(x)
(-1.0,
 mpf('-1.0'),
 mpi('-1.0', '-1.0'),
 Decimal('-1'),
 -1,
 arb3_t('-1.00000000000000'))

>>> x = 0
>>> fp.sign(x), mp.sign(x), iv.sign(x), dp.sign(x), gp.sign(x), ap.sign(x)
(0.0, mpf('0.0'), mpi('-1.0', '-1.0'), Decimal('0'), 0, arb3_t('0'))
```

Note that the sign function is also defined for complex numbers, for which it gives the projection onto the unit circle:

```
>>> mp.dps = 15; mp.pretty = True
>>> x = 1+1j
>>> fp.sign(x), mp.sign(x), iv.sign(x), dp.sign(x), gp.sign(x), ap.sign(x)
((0.707106781186475+0.707106781186475j),
 mpc(real='0.70710678118654746', imag='0.70710678118654746'),
 iv.mpc(mpi('0.7071067811703', '0.7071067811994'), mpi('0.7071067811703', '0.7071067811994')),
 DecCplx('0.707106781186547 + 0.707106781186547j'),
 mpc('0.70710678118654746+0.70710678118654746j'),
 acb3_t('[0.707106781186548 +/- 6.50e-16] + [0.707106781186548 +/- 6.50e-16]j'))
```

numpy.conjugate, **numpy.conj**

https://numpy.org/doc/stable/reference/generated/numpy.conj.html

Return the complex conjugate, element-wise.

The complex conjugate of a complex number is obtained by changing the sign of its imaginary part.

```
>>> np.conjugate(1+2j)
(1-2j)

>>> x = np.eye(2) + 1j * np.eye(2)
>>> np.conjugate(x)
array([[ 1.-1.j,  0.-0.j],
       [ 0.-0.j,  1.-1.j]])
```

From mpmath. See also Mpmath [665].

!!! Error in iv with complex input !!!

Returns the complex conjugate of x, $\overline{x}$. Unlike `x.conjugate()`, `im()` converts x to a mpmath number:

Example:

```
>>> from xlcalcnet import mp, iv, fp, dp, gp, ap
>>> mp.dps = 15; mp.pretty = True
>>> x = 3
>>> fp.conj(x), mp.conj(x), iv.conj(x), dp.conj(x), gp.conj(x), ap.conj(x)
(3.0,
 mpf('3.0'),
 mpi('3.0', '3.0'),
 Decimal('3'),
 mpfr('3.0'),
 arb3_t('3.00000000000000'))

>>> x = -1+4j
>>> fp.conj(x), mp.conj(x), dp.conj(x), gp.conj(x), ap.conj(x)
((-1-4j),
 mpc(real='-1.0', imag='-4.0'),
 DecCplx('-1 - 4.0j'),
 mpc('-1.0-4.0j'),
 acb3_t('-1.00000000000000 - 4.00000000000000j'))
```

7.22.3 Array contents

numpy.isfinite, **ctx.isfinite**

For a detailed description of parameters and return values see:

https://numpy.org/doc/stable/reference/generated/numpy.isfinite.html

Test element-wise for finiteness (not infinity and not Not a Number). The result is returned as a boolean array. Not a Number, positive infinity and negative infinity are considered to be non-finite.

NumPy uses the IEEE Standard for Binary Floating-Point for Arithmetic (IEEE 754). This means that Not a Number is not equivalent to infinity. Also that positive infinity is not equivalent to negative infinity. But infinity is equivalent to positive infinity. Errors result if the second argument is also supplied when x is a scalar input, or if first and second arguments have different shapes.

```
>>> import numpy as np; from xlcalcnet import mpm, dpm
>>> np.isfinite(1)
True
>>> np.isfinite(0)
True
>>> np.isfinite(np.nan)
False
>>> np.isfinite(np.inf)
False
>>> np.isfinite(np.NINF)
False
>>> np.isfinite([np.log(-1.),1.,np.log(0)])
array([False,  True, False])

>>> x = np.array([-np.inf, 0., np.inf])
>>> y = np.array([2, 2, 2])
>>> np.isfinite(x, y)
array([0, 1, 0])
>>> y
array([0, 1, 0])
```

From mpmath. See also Mpmath [687].

Return *True* if *x* is a finite number, i.e. neither an infinity or a NaN.

Example:

```
>>> from xlcalcnet import fpm, mpm, ipm, dec, gmp, apm; ctxall = [fpm, mpm, ipm, dec, gmp, apm]
>>> for ctx in ctxall: print(ctx.ctx.isfinite(ctx.inf), end=', ')
```

(continues on next page)

(continued from previous page)

```
False, False, False, False, False, False,

>>> for ctx in ctxall: print(ctx.ctx.isfinite(ctx.ninf), end=', ')
False, False, False, False, False, False,

>>> for ctx in ctxall: print(ctx.ctx.isfinite(ctx.nan), end=', ')
False, False, False, False, False, False,

>>> for ctx in ctxall: print(ctx.ctx.isfinite(3), end=', ')
True, True, True, True, True, True,

>>> for ctx in ctxall: print(ctx.ctx.isfinite(3+4j), end=', ')
True, True, True, True, True, True,

>>> for ctx in ctxall: print(ctx.ctx.isfinite(ctx.mpc(3,ctx.nan)), end=', ')
False, False, False, False, False, False,

>>> for ctx in ctxall: print(ctx.ctx.isfinite(ctx.mpc(ctx.nan,3)), end=', ')
False, False, False, False, False, False,

>>> for ctx in ctxall: print(ctx.ctx.isfinite(ctx.mpc(3,ctx.inf)), end=', ')
False, False, False, False, False, False,

>>> for ctx in ctxall: print(ctx.ctx.isfinite(ctx.mpc(ctx.inf,3)), end=', ')
False, False, False, False, False, False,
```

numpy.isinf, **ctx.isinf**

For a detailed description of parameters and return values see:

https://numpy.org/doc/stable/reference/generated/numpy.isinf

Test element-wise for positive or negative infinity.

Returns a boolean array of the same shape as x, True where `x == +/-inf`, otherwise False. NumPy uses the IEEE Standard for Binary Floating-Point for Arithmetic (IEEE 754). Errors result if the second argument is supplied when the first argument is a scalar, or if the first and second arguments have different shapes.

```
>>> import numpy as np; from xlcalcnet import mpm, dpm
>>> np.isinf(np.inf)
True
>>> np.isinf(np.nan)
False
>>> np.isinf(np.NINF)
True
>>> np.isinf([np.inf, -np.inf, 1.0, np.nan])
array([ True,  True, False, False])

>>> x = np.array([-np.inf, 0., np.inf])
>>> y = np.array([2, 2, 2])
>>> np.isinf(x, y)
array([1, 0, 1])
>>> y
array([1, 0, 1])
```

From mpmath. See also Mpmath [688].

Return *True* if the absolute value of *x* is infinite; otherwise return *False*.

Example:

```
>>> from xlcalcnet import fpm, mpm, ipm, dec, gmp, apm; ctxall = [fpm, mpm, ipm, dec, gmp, apm]
>>> for ctx in ctxall: print(ctx.isinf(ctx.inf), end=', ')
True, True, True, True, True, True,
```

(continues on next page)

(continued from previous page)

```
>>> for ctx in ctxall: print(ctx.isinf(ctx.ninf), end=', ')
True, True, True, True, True, True,

>>> for ctx in ctxall: print(ctx.isinf(ctx.nan), end=', ')
False, False, False, False, False, False,

>>> for ctx in ctxall: print(ctx.isinf(3), end=', ')
False, False, False, False, False, False,

>>> for ctx in ctxall: print(ctx.isinf(3+4j), end=', ')
False, False, False, False, False, False,

>>> for ctx in ctxall: print(ctx.isinf(ctx.mpc(3,ctx.nan)), end=', ')
False, False, False, False, False, False,

>>> for ctx in ctxall: print(ctx.isinf(ctx.mpc(ctx.nan,3)), end=', ')
False, False, False, False, False, False,

>>> for ctx in ctxall: print(ctx.isinf(ctx.mpc(3,ctx.inf)), end=', ')
True, True, True, True, True, True,

>>> for ctx in ctxall: print(ctx.isinf(ctx.mpc(ctx.inf,3)), end=', ')
True, True, True, True, True, True,
```

numpy.isnan, ctx.isnan

For a detailed description of parameters and return values see:

https://numpy.org/doc/stable/reference/generated/numpy.isnan.html#numpy.isnan

Test element-wise for NaN and return result as a boolean array. NumPy uses the IEEE Standard for Binary Floating-Point for Arithmetic (IEEE 754). This means that Not a Number is not equivalent to infinity.

```
>>> import numpy as np; from xlcalcnet import mpm, dpm
>>> np.isnan(np.nan)
True
>>> np.isnan(np.inf)
False
>>> np.isnan([np.log(-1.),1.,np.log(0)])
array([ True, False, False])
```

From mpmath. See also Mpmath [686].

Return *True* if *x* is a NaN (not-a-number), or for a complex number, whether either the real or complex part is NaN; otherwise return *False*:

Example:

```
>>> from xlcalcnet import fpm, mpm, ipm, dec, gmp, apm; ctxall = [fpm, mpm, ipm, dec, gmp, apm]
>>> for ctx in ctxall: print(ctx.isnan(ctx.nan), end=', ')
True, True, True, True, True, True,

>>> for ctx in ctxall: print(ctx.isnan(ctx.inf), end=', ')
False, False, False, False, False, False,

>>> for ctx in ctxall: print(ctx.isnan(ctx.ninf), end=', ')
False, False, False, False, False, False,

>>> for ctx in ctxall: print(ctx.isnan(3), end=', ')
False, False, False, False, False, False,

>>> for ctx in ctxall: print(ctx.isnan(3+4j), end=', ')
False, False, False, False, False, False,

>>> for ctx in ctxall: print(ctx.isnan(ctx.mpc(3,ctx.inf)), end=', ')
```

(continues on next page)

(continued from previous page)

```
False, False, False, False, False, False,

>>> for ctx in ctxall: print(ctx.isnan(ctx.mpc(ctx.inf,3)), end=', ')
False, False, False, False, False, False,

>>> for ctx in ctxall: print(ctx.isnan(ctx.mpc(3,ctx.nan)), end=', ')
True, True, True, True, True, True,

>>> for ctx in ctxall: print(ctx.isnan(ctx.mpc(ctx.nan,3)), end=', ')
True, True, True, True, True, True,
```

numpy.isnat, **ctx.isnat**

For a detailed description of parameters and return values see:

https://numpy.org/doc/stable/reference/generated/numpy.isnat.html#numpy.isnat

Test element-wise for NaT (not a time) and return result as a boolean array.

```
>>> import numpy as np; from xlcalcnet import mpm, dpm
>>> np.isnat(np.datetime64("NaT"))
True
>>> np.isnat(np.datetime64("2016-01-01"))
False
>>> np.isnat(np.array(["NaT", "2016-01-01"], dtype="datetime64[ns]"))
array([ True, False])
```

numpy.isneginf, **ctx.isneginf**

For a detailed description of parameters and return values see:

https://numpy.org/doc/stable/reference/generated/numpy.isneginf.html#numpy.isneginf

Test element-wise for negative infinity, return result as bool array. NumPy uses the IEEE Standard for Binary Floating-Point for Arithmetic (IEEE 754). Errors result if the second argument is also supplied when x is a scalar input, if first and second arguments have different shapes, or if the first argument has complex values.

```
>>> import numpy as np; from xlcalcnet import mpm, dpm
>>> np.isneginf(np.NINF)
True
>>> np.isneginf(np.inf)
False
>>> np.isneginf(np.PINF)
False
>>> np.isneginf([-np.inf, 0., np.inf])
array([ True, False, False])

>>> x = np.array([-np.inf, 0., np.inf])
>>> y = np.array([2, 2, 2])
>>> np.isneginf(x, y)
array([1, 0, 0])
>>> y
array([1, 0, 0])
```

numpy.isposinf, **ctx.isposinf**

For a detailed description of parameters and return values see:

https://numpy.org/doc/stable/reference/generated/numpy.isposinf.html#numpy.isposinf

Test element-wise for positive infinity, return result as bool array. NumPy uses the IEEE Standard for Binary Floating-Point for Arithmetic (IEEE 754). Errors result if the second argument is also supplied when x is a scalar input, if first and second arguments have different shapes, or if the first argument has complex values.

```
>>> import numpy as np; from xlcalcnet import mpm, dpm
>>> np.isposinf(np.PINF)
True
>>> np.isposinf(np.inf)
True
>>> np.isposinf(np.NINF)
False
>>> np.isposinf([-np.inf, 0., np.inf])
array([False, False,  True])

>>> x = np.array([-np.inf, 0., np.inf])
>>> y = np.array([2, 2, 2])
>>> np.isposinf(x, y)
array([0, 0, 1])
>>> y
array([0, 0, 1])
```

ctx.isint(x, gaussian=False)

From mpmath. See also Mpmath [689].

Return *True* if *x* is integer-valued; otherwise return *False*:

Example:

```
>>> from xlcalcnet import fpm, mpm, ipm, dec, gmp, apm; ctxall = [fpm, mpm, ipm, dec, gmp, apm]
>>> for ctx in ctxall: print(ctx.isint(ctx.inf), end=', ')
False, False, False, False, False, False,

>>> for ctx in ctxall: print(ctx.isint(ctx.ninf), end=', ')
False, False, False, False, False, False,

>>> for ctx in ctxall: print(ctx.isint(ctx.nan), end=', ')
False, False, False, False, False, False,

>>> for ctx in ctxall: print(ctx.isint(3), end=', ')
True, True, True, True, True, True,

>>> for ctx in ctxall: print(ctx.isint(3+0j), end=', ')
True, True, True, True, True, True,

>>> for ctx in ctxall: print(ctx.isint(3+4j), end=', ')
False, False, False, False, False, False,
```

Optionally, Gaussian integers can be checked for:

```
>>> isint(3+2j, gaussian=True)
True
```

ctx.isnormal(x)

From mpmath. . See also Mpmath [690].

Determine whether *x* is "normal" in the sense of floating-point representation; that is, return *False* if *x* is zero, an infinity or NaN; otherwise return *True*.

By extension, a complex number *x* is considered "normal" if its magnitude is normal:

```
>>> from xlcalcnet import fpm, mpm, ipm, dec, gmp, apm; ctxall = [fpm, mpm, ipm, dec, gmp, apm]
>>> for ctx in ctxall: print(ctx.isnormal(ctx.nan), end=', ')
False, False, False, False, False, False,

>>> for ctx in ctxall: print(ctx.isnormal(ctx.inf), end=', ')
False, False, False, False, False, False,
```

(continues on next page)

(continued from previous page)

```
>>> for ctx in ctxall: print(ctx.isnormal(ctx.ninf), end=', ')
False, False, False, False, False, False,

>>> for ctx in ctxall: print(ctx.isnormal(0), end=', ')
False, False, False, False, False, False,

>>> for ctx in ctxall: print(ctx.isnormal(3), end=', ')
True, True, True, True, True, True,

>>> for ctx in ctxall: print(ctx.isnormal(3+4j), end=', ')
True, True, True, True, True, True,

>>> for ctx in ctxall: print(ctx.isnormal(ctx.mpc(3,ctx.inf)), end=', ')
False, False, False, False, False, False,

>>> for ctx in ctxall: print(ctx.isnormal(ctx.mpc(ctx.inf,3)), end=', ')
False, False, False, False, False, False,

>>> for ctx in ctxall: print(ctx.isnormal(ctx.mpc(3,ctx.nan)), end=', ')
False, False, False, False, False, False,

>>> for ctx in ctxall: print(ctx.isnormal(ctx.mpc(ctx.nan,3)), end=', ')
False, False, False, False, False, False,
```

7.22.4 Array type testing

numpy.iscomplex, **ctx.iscomplex**

For a detailed description of parameters and return values see:

https://numpy.org/doc/stable/reference/generated/numpy.iscomplex.html#numpy.iscomplex

Returns a bool array, where True if input element is complex. What is tested is whether the input has a non-zero imaginary part, not if the input type is complex.

```
>>> import numpy as np; from xlcalcnet import mpm, dpm
>>> np.iscomplex([1+1j, 1+0j, 4.5, 3, 2, 2j])
array([ True, False, False, False, False,  True])
```

numpy.iscomplexobj, **ctx.iscomplexobj**, **ctx.ismpc**

For a detailed description of parameters and return values see:

https://numpy.org/doc/stable/reference/generated/numpy.iscomplexobj.html#numpy.iscomplexobj

Check for a complex type or an array of complex numbers. The type of the input is checked, not the value. Even if the input has an imaginary part equal to zero, iscomplexobj evaluates to True.

```
>>> import numpy as np; from xlcalcnet import mpm, dpm
>>> np.iscomplexobj(1)
False
np.iscomplexobj(1+0j)
True
np.iscomplexobj([3, 1+0j, True])
True
```

From mpmath:

Returns *True* if *x* is an instance of `ctx.mpc`; otherwise returns *False*.

Example:

```
>>> from xlcalcnet import fpm, mpm, ipm, dec, gmp, apm; ctxall = [fpm, mpm, ipm, dec, gmp, apm]
>>> for ctx in ctxall: print(ctx.ismpc(ctx.inf), end=', ')
False, False, False, False, False, False,

>>> for ctx in ctxall: print(ctx.ismpc(ctx.ninf), end=', ')
False, False, False, False, False, False,

>>> for ctx in ctxall: print(ctx.ismpc(ctx.nan), end=', ')
False, False, False, False, False, False,

>>> for ctx in ctxall: print(ctx.ismpc(ctx.one), end=', ')
False, False, False, False, False, False,

>>> for ctx in ctxall: print(ctx.ismpc(1.0), end=', ')
False, False, False, False, False, False,

>>> for ctx in ctxall: print(ctx.ismpc(ctx.j), end=', ')
True, True, True, True, True, True,

>>> for ctx in ctxall: print(ctx.ismpc(1j), end=', ')
True, False, False, False, False, False,

>>> for ctx in ctxall: print(ctx.ismpc(ctx.mpc(3,ctx.inf)), end=', ')
True, True, True, True, True, True,
```

numpy.isreal, **ctx.isreal**

For a detailed description of parameters and return values see:

https://numpy.org/doc/stable/reference/generated/numpy.isreal.html#numpy.isreal

Returns a bool array, where True if input element is real. If element has complex type with zero complex part, the return value for that element is True. This function may behave unexpectedly for string or object arrays (see examples)

```
>>> import numpy as np; from xlcalcnet import mpm, dpm
>>> a = np.array([1+1j, 1+0j, 4.5, 3, 2, 2j], dtype=complex)
>>> np.isreal(a)
array([False,  True,  True,  True,  True, False])
```

The function does not work on string arrays.

```
>>> a = np.array([2j, "a"], dtype="U")
>>> np.isreal(a)  # Warns about non-elementwise comparison
False
```

Returns True for all elements in input array of dtype=object even if any of the elements is complex.

```
>>> a = np.array([1, "2", 3+4j], dtype=object)
>>> np.isreal(a)
array([ True,  True,  True])
```

`isreal` should not be used with object arrays

```
>>> a = np.array([1+2j, 2+1j], dtype=object)
>>> np.isreal(a)
array([ True,  True])
```

numpy.isrealobj, **ctx.isrealobj**, **ctx.ismpf**

For a detailed description of parameters and return values see:

https://numpy.org/doc/stable/reference/generated/numpy.isrealobj.html#numpy.isrealobj

Return True if x is a not complex type or an array of complex numbers. The type of the input is checked, not the value. So even if the input has an imaginary part equal to zero, `isrealobj` evaluates to False if the data type is complex. The function is only meant

for arrays with numerical values but it accepts all other objects. Since it assumes array input, the return value of other objects may be True.

```
>>> import numpy as np; from xlcalcnet import mpm, dpm
>>> np.isrealobj('A string')
True
>>> np.isrealobj(False)
True
>>> np.isrealobj(None)
True

>>> np.isrealobj(1)
True
>>> np.isrealobj(1+0j)
False
>>> np.isrealobj([3, 1+0j, True])
False
```

From mpmath:

Returns *True* if *x* is an instance of `ctx.mpf`; otherwise returns *False*.

Example:

```
>>> from xlcalcnet import fpm, mpm, ipm, dec, gmp, apm; ctxall = [fpm, mpm, ipm, dec, gmp, apm]
>>> for ctx in ctxall: print(ctx.ismpf(ctx.inf), end=', ')
True, True, True, True, True, True,

>>> for ctx in ctxall: print(ctx.ismpf(ctx.ninf), end=', ')
True, True, True, True, True, True,

>>> for ctx in ctxall: print(ctx.ismpf(ctx.nan), end=', ')
True, True, True, True, True, True,

>>> for ctx in ctxall: print(ctx.ismpf(ctx.one), end=', ')
True, True, True, True, True, True,

>>> for ctx in ctxall: print(ctx.ismpf(1.0), end=', ')
True, False, False, False, False, False,

>>> for ctx in ctxall: print(ctx.ismpf(ctx.j), end=', ')
False, False, False, False, False, False,

>>> for ctx in ctxall: print(ctx.ismpf(1j), end=', ')
False, False, False, False, False, False,

>>> for ctx in ctxall: print(ctx.ismpf(ctx.mpc(3,ctx.inf)), end=', ')
False, False, False, False, False, False,
```

numpy.isscalar, **ctx.isscalar**

For a detailed description of parameters and return values see:

https://numpy.org/doc/stable/reference/generated/numpy.isscalar.html#numpy.isscalar

Returns True if the type of element is a scalar type. In most cases `np.ndim(x) == 0` should be used instead of this function, as that will also return true for 0d arrays.

```
>>> import numpy as np; from xlcalcnet import mpm, dpm
>>> np.isscalar(3.1)
True
>>> np.isscalar(np.array(3.1))
False
>>> np.isscalar([3.1])
False
>>> np.isscalar(False)
```

(continues on next page)

(continued from previous page)

```
True
>>> np.isscalar('numpy')
True
```

NumPy supports PEP 3141 numbers:

```
>>> from fractions import Fraction
>>> np.isscalar(Fraction(5, 17))
True
>>> from numbers import Number
>>> np.isscalar(Number())
True
```

7.22.5 Using tolerances

numpy.allclose, **ctx.allclose**

For a detailed description of parameters and return values see:

https://numpy.org/doc/stable/reference/generated/numpy.allclose.html#numpy.allclose

Returns True if two arrays are element-wise equal within a tolerance.

The tolerance values are positive, typically very small numbers. The relative difference (rtol * abs(b)) and the absolute difference atol are added together to compare against the absolute difference between a and b.

NaNs are treated as equal if they are in the same place and if `equal_nan=True`. Infs are treated as equal if they are in the same place and of the same sign in both arrays.

If the following equation is element-wise True, then allclose returns True.

absolute(a - b) <= (atol + rtol * absolute(b))

The above equation is not symmetric in a and b, so that `allclose(a, b)` might be different from `allclose(b, a)` in some rare cases.

The comparison of a and b uses standard broadcasting, which means that a and b need not have the same shape in order for `allclose(a, b)` to evaluate to True. The same is true for equal but not array_equal.

allclose is not defined for non-numeric data types. bool is considered a numeric data-type for this purpose.

```
>>> import numpy as np; from xlcalcnet import mpm, dpm
>>> np.allclose([1e10,1e-7], [1.00001e10,1e-8])
False
>>> np.allclose([1e10,1e-8], [1.00001e10,1e-9])
True
>>> np.allclose([1e10,1e-8], [1.0001e10,1e-9])
False
>>> np.allclose([1.0, np.nan], [1.0, np.nan])
False
>>> np.allclose([1.0, np.nan], [1.0, np.nan], equal_nan=True)
True
```

numpy.isclose, **ctx.isclose**, **ctx.almosteq(s, t, rel_eps=None, abs_eps=None)**

For a detailed description of parameters and return values see:

https://numpy.org/doc/stable/reference/generated/numpy.isclose.html#numpy.isclose

Returns a boolean array where two arrays are element-wise equal within a tolerance.

The tolerance values are positive, typically very small numbers. The relative difference (rtol * abs(b)) and the absolute difference atol are added together to compare against the absolute difference between a and b.

For finite values, isclose uses the following equation to test whether two floating point values are equivalent.

absolute(a - b) <= (atol + rtol * absolute(b))

Unlike the built-in math.isclose, the above equation is not symmetric in a and b – it assumes b is the reference value – so that isclose(a, b) might be different from isclose(b, a). Furthermore, the default value of atol is not zero, and is used to determine what small values should be considered close to zero. The default value is appropriate for expected values of order unity: if the expected values are significantly smaller than one, it can result in false positives. atol should be carefully selected for the use case at hand. A zero value for atol will result in False if either a or b is zero.

isclose is not defined for non-numeric data types. bool is considered a numeric data-type for this purpose.

```
>>> import numpy as np; from xlcalcnet import mpm, dpm
>>> np.isclose([1e10,1e-7], [1.00001e10,1e-8])
array([ True, False])
>>> np.isclose([1e10,1e-8], [1.00001e10,1e-9])
array([ True, True])
>>> np.isclose([1e10,1e-8], [1.0001e10,1e-9])
array([False,  True])

>>> np.isclose([1.0, np.nan], [1.0, np.nan])
array([ True, False])
>>> np.isclose([1.0, np.nan], [1.0, np.nan], equal_nan=True)
array([ True, True])

>>> np.isclose([1e-8, 1e-7], [0.0, 0.0])
array([ True, False])
>>> np.isclose([1e-100, 1e-7], [0.0, 0.0], atol=0.0)
array([False, False])
>>> np.isclose([1e-10, 1e-10], [1e-20, 0.0])
array([ True,  True])
>>> np.isclose([1e-10, 1e-10], [1e-20, 0.999999e-10], atol=0.0)
array([False,  True])
```

From mpmath. See also Mpmath [691].

Determine whether the difference between s and t is smaller than a given epsilon, either relatively or absolutely.

Both a maximum relative difference and a maximum difference ('epsilons') may be specified. The absolute difference is defined as $|s-t|$ and the relative difference is defined as $|s-t|/\max(|s|,|t|)$.

If only one epsilon is given, both are set to the same value. If none is given, both epsilons are set to 2^{-p+m} where p is the current working precision and m is a small integer. The default setting typically allows `almosteq()` to be used to check for mathematical equality in the presence of small rounding errors.

Examples

```
>>> from xlcalcnet import mp, iv, fp, dp, gp, ap
>>> mp.dps = 15; mp.pretty = False
>>> s = 3.141592653589793; t = 3.141592653589790
>>> for ctx in [fp, mp, iv, dp, gp, ap]: print(ctx.almosteq(s, t), end=', ')
True, True, True, True, True, True,

>>> s = 3.141592653589793; t = 3.141592653589700
>>> for ctx in [fp, mp, iv, dp, gp, ap]: print(ctx.almosteq(s, t), end=', ')
False, False, False, False, False, False,

>>> for ctx in [fp, mp, iv, dp, gp, ap]: print(ctx.almosteq(s, t, 1e-10), end=', ')
True, True, True, True, True, True,

>>> for ctx in [fp, mp, iv, dp, gp, ap]: print(ctx.almosteq(1e-20, 2e-20), end=', ')
True, True, True, True, True, True,

>>> for ctx in [fp, mp, iv, dp, gp, ap]: print(ctx.almosteq(1e-20, 2e-20, rel_eps=0, abs_eps=0), end=', ')
False, False, False, False, False, False,
```

7.22.6 Clipping (limiting) the values in an array.

numpy.clip

For a detailed description of parameters and return values see:

https://numpy.org/doc/stable/reference/generated/numpy.clip.html

Clip (limit) the values in an array.

Given an interval, values outside the interval are clipped to the interval edges. For example, if an interval of `[0, 1]` is specified, values smaller than 0 become 0, and values larger than 1 become 1.

Equivalent to but faster than `np.minimum(a_max, np.maximum(a, a_min))`.

No check is performed to ensure `a_min < a_max`.

When a_min is greater than a_max, `clip` returns an array in which all values are equal to a_max, as shown in the second example.

```
>>> import numpy as np; from xlcalcnet import mpm, dpm
>>> a = np.arange(10)
>>> a
array([0, 1, 2, 3, 4, 5, 6, 7, 8, 9])
>>> np.clip(a, 1, 8)
array([1, 1, 2, 3, 4, 5, 6, 7, 8, 8])
>>> np.clip(a, 8, 1)
array([1, 1, 1, 1, 1, 1, 1, 1, 1, 1])
>>> np.clip(a, 3, 6, out=a)
array([3, 3, 3, 3, 4, 5, 6, 6, 6, 6])
>>> a
array([3, 3, 3, 3, 4, 5, 6, 6, 6, 6])
>>> a = np.arange(10)
>>> a
array([0, 1, 2, 3, 4, 5, 6, 7, 8, 9])
>>> np.clip(a, [3, 4, 1, 1, 1, 4, 4, 4, 4, 4], 8)
array([3, 4, 2, 3, 4, 5, 6, 7, 8, 8])
```

numpy.real_if_close

For a detailed description of parameters and return values see:

https://numpy.org/doc/stable/reference/generated/numpy.real_if_close.html

If input is complex with all imaginary parts close to zero, return real parts.

“Close to zero” is defined as tol * (machine epsilon of the type for a).

Machine epsilon varies from machine to machine and between data types but Python floats on most platforms have a machine epsilon equal to 2.2204460492503131e-16. You can use ‘np.finfo(float).eps’ to print out the machine epsilon for floats.

```
>>> import numpy as np; from xlcalcnet import mpm, dpm
>>> np.finfo(float).eps
2.22044604925031e-16 # may vary

>>> np.real_if_close([2.1 + 4e-14j, 5.2 + 3e-15j], tol=1000)
array([2.1, 5.2])
>>> np.real_if_close([2.1 + 4e-13j, 5.2 + 3e-15j], tol=1000)
array([2.1+4.e-13j, 5.2 + 3e-15j])
```

ctx.chop(x, tol=None)

See also Mpmath [679].

!!! iv context does not accept lists: NotImplementedError !!!

!!! dp, gp and ap contexts do not accept lists: return None !!!

Chops off small real or imaginary parts, or converts numbers close to zero to exact zeros. The input can be a single number or an iterable:

Example:

```
>>> from xlcalcnet import mp, iv, fp, dp, gp, ap
>>> mp.dps = 15; mp.pretty = False

>>> for ctx in [fp, mp, iv, dp, gp, ap]: print(repr(ctx.chop(1e-10, tol = 1e-11)))
1e-10
mpf('1.0e-10')
mpi('1.0e-10', '1.0e-10')
Decimal('1E-10')
mpfr('1e-10')
arb3_t('[1.00000000000000e-10 +/- 3.66e-27]')

>>> for ctx in [fp, mp, iv, dp, gp, ap]: print(repr(ctx.chop(1e-10, tol = 1e-9)))
0.0
mpf('0.0')
mpi('0.0', '0.0')
Decimal('0')
mpfr('0.0')
arb3_t('0')

>>> for ctx in [fp, mp, iv, dp, gp, ap]: print(repr(ctx.chop(5+1e-10j, tol = 1e-9)))
5.0
mpf('5.0')
mpi('5.0', '5.0')
Decimal('5')
mpfr('5.0')
arb3_t('5.00000000000000')

>>> for ctx in [mp, fp, dp, gp, ap]: print(ctx.chop([1.0, 1e-20, 3+1e-18j, -4, 2]))
[mpf('1.0'), mpf('0.0'), mpf('3.0'), mpf('-4.0'), mpf('2.0')]
[1.0, 0.0, 3.0, -4.0, 2.0]

None
None
None
```

The tolerance defaults to `100*eps`.

7.23 Arithmetic operations with scalars and iterables

7.23.1 fadd: Addition using a custom precision and rounding mode

`ctx.fadd`(*x*, *y*, ***kwargs*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`. See also Mpmath [662].

!!! There is no special code for fadd except mp !!!

!!! Add special code for dp, gp, ap !!!

!!! fp and iv still missing !!!

Adds the numbers *x* and *y*, giving a floating-point result, optionally using a custom precision and rounding mode.

The default precision is the working precision of the context. You can specify a custom precision in bits by passing the *prec* keyword argument, or by providing an equivalent decimal precision with the *dps* keyword argument. If the precision is set to `+inf`, or if the flag *exact=True* is passed, an exact addition with no rounding is performed. Changing the precision has no effect for the fp context.

For the mp, dp, gp, and ap (in point mode only) contexts: when the precision is finite, the optional *rounding* keyword argument specifies the direction of rounding. Valid options are `'n'` for nearest (default), `'f'` for floor, `'c'` for ceiling, `'d'` for down, `'u'` for up.

Examples

Using *fadd()* with precision and rounding control:

```
>>> from xlcalcnet import fp, mp, iv, dp, gp, ap
>>> mp.fadd(2, 1e-20)
mpf('2.0')
>>> mp.nprint(mp.fadd(2, 1e-20, prec=100), 25)
2.000000000000000000001
>>> mp.nprint(mp.fadd(2, 1e-20, dps=15), 25)
2.0
>>> mp.nprint(mp.fadd(2, 1e-20, dps=25), 25)
2.000000000000000000001
>>> mp.nprint(mp.fadd(2, 1e-20, exact=True), 25)
2.000000000000000000001




>>> gp.dps = 15; gp.pretty = False
>>> gp.fadd(2, 1e-20)
mpfr('2.0')
>>> gp.nprint(gp.fadd(2, 1e-20, prec=100), 25)
2.0000000000000000000000000E+00
>>> gp.nprint(gp.fadd(2, 1e-20, dps=15), 25)
2.0000000000000000000000000E+00
>>> gp.nprint(gp.fadd(2, 1e-20, dps=25), 25)
2.0000000000000000000000000E+00
>>> gp.nprint(gp.fadd(2, 1e-20, exact=True), 25)
2.0000000000000000000000000E+00


>>> dp.dps = 15; dp.pretty = False
>>> dp.fadd(2, 1e-20)
Decimal('2.000000000000000')
>>> dp.nprint(dp.fadd(2, 1e-20, prec=100), 25)
2.0000000000000000000000000E+0
>>> dp.dps=100
>>> dp.mpf(2) + dp.mpf('1e-20')
Decimal('2.00000000000000000001')
>>> dp.nprint(dp.fadd(2, 1e-20, dps=15), 25)
```

(continues on next page)

(continued from previous page)

```
2.0000000000000000000010000E+0
>>> dp.nprint(dp.fadd(2, 1e-20, dps=25), 25)
2.0000000000000000000010000E+0
>>> dp.nprint(dp.fadd(2, 1e-20, exact=True), 25)
2.0000000000000000000010000E+0


>>> ap.dps = 15; ap.pretty = False
>>> ap.fadd(2, 1e-20)
arb3_t('[2.00000000000000 +/- 4.45e-16]')
>>> ap.fadd(2, 1e-20, rounding='u')
 arb3_t('[2.00000000000000 +/- 4.45e-16]')
>>> ap.nprint(ap.fadd(2, 1e-20, prec=100), 25)
# nprint not properly implemented
>>> ap.dps=25
>>> ap.mpf(2) + ap.mpf('1e-20')
arb3_t('[2.000000000000000000010000 +/- 5.85e-26]')
>>> ap.nprint(ap.fadd(2, 1e-20, dps=15), 25)
# nprint not properly implemented
>>> ap.nprint(ap.fadd(2, 1e-20, dps=25), 25)
# nprint not properly implemented
>>> ap.nprint(ap.fadd(2, 1e-20, exact=True), 25)
# nprint not properly implemented
```

This is the current state of affairs in iv:

```
>>> iv.dps = 15; iv.pretty = False
>>> iv.fadd(2, 1e-20)
mpi('2.0', '2.0000000000000004')
>>> iv.nprint(iv.fadd(2, 1e-20, prec=100), 25)
[2.0, 2.0000000000000000044408921]#    nprint not properly implemented
>>> iv.nprint(iv.fadd(2, 1e-20, dps=15), 25)
[2.0, 2.0000000000000000044408921]#    nprint not properly implemented
>>> iv.nprint(iv.fadd(2, 1e-20, dps=25), 25)
[2.0, 2.0000000000000000044408921]#    nprint not properly implemented
>>> iv.nprint(iv.fadd(2, 1e-20, exact=True), 25)
[2.0, 2.0000000000000000044408921]#    nprint not properly implemented
```

TODO: Another ap example in floating point mode

See also: https://docs.python.org/3/tutorial/floatingpoint.html#tut-fp-issues.

Exact addition avoids cancellation errors, enforcing familiar laws of numbers such as $x + y - x = y$, which don't hold in floating-point arithmetic with finite precision:

```
>>> x, y = mp.mpf(2), mp.mpf('1e-1000')
>>> print(x + y - x)
0.0
>>> print(mp.fadd(x, y, prec=inf) - x)
1.0e-1000
>>> print(mp.fadd(x, y, exact=True) - x)
1.0e-1000
```

Exact addition can be inefficient and may be impossible to perform with large magnitude differences:

```
>>> fadd(1, '1e-1000000000000000000000', prec=inf)
Traceback (most recent call last):
    ...
OverflowError: the exact result does not fit in memory
```

7.23.2 fsub: Subtraction using a custom precision and rounding mode

`ctx.fsub`(*x*, *y*, ***kwargs*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`. See also Mpmath [677].

Subtracts the numbers *x* and *y*, giving a floating-point result, optionally using a custom precision and rounding mode.

See the documentation of *fadd()* for a detailed description of how to specify precision and rounding.

Examples

Using *fsub()* with precision and rounding control:

```
>>> from xlcalcnet import *
>>> mp.dps = 15; mp.pretty = False
>>> fsub(2, 1e-20)
mpf('2.0')
>>> fsub(2, 1e-20, rounding='d')
mpf('1.9999999999999998')
>>> nprint(fsub(2, 1e-20, prec=100), 25)
1.99999999999999999999
>>> nprint(fsub(2, 1e-20, dps=15), 25)
2.0
>>> nprint(fsub(2, 1e-20, dps=25), 25)
1.9999999999999999999
>>> nprint(fsub(2, 1e-20, exact=True), 25)
1.9999999999999999999
```

Exact subtraction avoids cancellation errors, enforcing familiar laws of numbers such as $x - y + y = x$, which don't hold in floating-point arithmetic with finite precision:

```
>>> x, y = mpf(2), mpf('1e1000')
>>> print(x - y + y)
0.0
>>> print(fsub(x, y, prec=inf) + y)
2.0
>>> print(fsub(x, y, exact=True) + y)
2.0
```

Exact subtraction can be inefficient and may be impossible to perform with large magnitude differences:

```
>>> fsub(1, '1e-1000000000000000000000', prec=inf)
Traceback (most recent call last):
    ...
OverflowError: the exact result does not fit in memory
```

7.23.3 fneg: Negation of a number using a custom precision and rounding mode

`ctx.fneg`(*x*, ***kwargs*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`. See also Mpmath [672].

!!! NEEDS TO DESCRIBE PARAMETERS !!!!

Negates the number *x*, giving a floating-point result, optionally using a custom precision and rounding mode.

See the documentation of *fadd()* for a detailed description of how to specify precision and rounding.

Examples

An mpmath number is returned:

```
>>> from xlcalcnet import *
>>> mp.dps = 15; mp.pretty = False
>>> fneg(2.5)
```

(continues on next page)

(continued from previous page)

```
mpf('-2.5')
>>> fneg(-5+2j)
mpc(real='5.0', imag='-2.0')
```

Precise control over rounding is possible:

```
>>> x = fadd(2, 1e-100, exact=True)
>>> fneg(x)
mpf('-2.0')
>>> fneg(x, rounding='f')
mpf('-2.0000000000000004')
```

Negating with and without roundoff:

```
>>> n = 200000000000000000000001
>>> print(int(-mpf(n)))
-200000000000000016777216
>>> print(int(fneg(n)))
-200000000000000016777216
>>> print(int(fneg(n, prec=log(n,2)+1)))
-200000000000000000000001
>>> print(int(fneg(n, dps=log(n,10)+1)))
-200000000000000000000001
>>> print(int(fneg(n, prec=inf)))
-200000000000000000000001
>>> print(int(fneg(n, dps=inf)))
-200000000000000000000001
>>> print(int(fneg(n, exact=True)))
-200000000000000000000001
```

7.23.4 fmul: Multiplication using a custom precision and rounding mode

`ctx.`**`fmul`**(*x*, *y*, ***kwargs*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`. See also Mpmath [671].

Multiplies the numbers *x* and *y*, giving a floating-point result, optionally using a custom precision and rounding mode.

See the documentation of *`fadd()`* for a detailed description of how to specify precision and rounding.

Examples

The result is an mpmath number:

```
>>> from xlcalcnet import *
>>> mp.dps = 15; mp.pretty = False
>>> fmul(2, 5.0)
mpf('10.0')
>>> fmul(0.5j, 0.5)
mpc(real='0.0', imag='0.25')
```

Avoiding roundoff:

```
>>> x, y = 10**10+1, 10**15+1
>>> print(x*y)
10000000001000010000000001
>>> print(mpf(x) * mpf(y))
1.0000000001e+25
>>> print(int(mpf(x) * mpf(y)))
10000000001000011026399232
>>> print(int(fmul(x, y)))
10000000001000011026399232
>>> print(int(fmul(x, y, dps=25)))
```

(continues on next page)

(continued from previous page)

```
10000000001000010000000001
>>> print(int(fmul(x, y, exact=True)))
10000000001000010000000001
```

Exact multiplication with complex numbers can be inefficient and may be impossible to perform with large magnitude differences between real and imaginary parts:

```
>>> x = 1+2j
>>> y = mpc(2, '1e-10000000000000000000')
>>> fmul(x, y)
mpc(real='2.0', imag='4.0')
>>> fmul(x, y, rounding='u')
mpc(real='2.0', imag='4.0000000000000009')
>>> fmul(x, y, exact=True)
Traceback (most recent call last):
    ...
OverflowError: the exact result does not fit in memory
```

7.23.5 fdiv: Division using a custom precision and rounding mode

`ctx.fdiv`(*x*, *y*, ***kwargs*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`. See also Mpmath [667].

Divides the numbers *x* and *y*, giving a floating-point result, optionally using a custom precision and rounding mode.

See the documentation of *fadd()* for a detailed description of how to specify precision and rounding.

Examples

The result is an mpmath number:

```
>>> from xlcalcnet import *
>>> mp.dps = 15; mp.pretty = False
>>> fdiv(3, 2)
mpf('1.5')
>>> fdiv(2, 3)
mpf('0.66666666666666663')
>>> fdiv(2+4j, 0.5)
mpc(real='4.0', imag='8.0')
```

The rounding direction and precision can be controlled:

```
>>> fdiv(2, 3, dps=3)    # Should be accurate to at least 3 digits
mpf('0.6666259765625')
>>> fdiv(2, 3, rounding='d')
mpf('0.66666666666666663')
>>> fdiv(2, 3, prec=60)
mpf('0.66666666666666667')
>>> fdiv(2, 3, rounding='u')
mpf('0.66666666666666674')
```

Checking the error of a division by performing it at higher precision:

```
>>> fdiv(2, 3) - fdiv(2, 3, prec=100)
mpf('-3.7007434154172148e-17')
```

Unlike *fadd()*, *fmul()*, etc., exact division is not allowed since the quotient of two floating-point numbers generally does not have an exact floating-point representation. (In the future this might be changed to allow the case where the division is actually exact.)

```
>>> fdiv(2, 3, exact=True)
Traceback (most recent call last):
    ...
ValueError: division is not an exact operation
```

7.23.6 fsum: Sum of a finite number of terms

`ctx.`**`fsum`**(*terms*, *absolute=False*, *squared=False*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`. See also Mpmath [678].

Calculates a sum containing a finite number of terms . With squared=True each term is squared, and with absolute=True the absolute value of each term is used.

```
>>> from xlcalcnet import fp, mp, iv, dp, gp, ap
>>> A = [1, 2, 0.5, 7]
>>> for ctx in [fp, mp, iv, dp, gp, ap]: ctx.dps = 15;  print(repr(ctx.fsum(A)), end=', ')
10.5, mpf('10.5'), mpi('10.5', '10.5'), Decimal('10.5'), mpfr('10.5'), arb3_t('10.5'),
```

7.23.7 fprod: Product of a finite number of factors

`ctx.`**`fprod`**(*factors*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`. See also Mpmath [674].

Calculates a product containing a finite number of factors (for infinite products, see *nprod()*).

The factors will be converted to mpmath numbers.

```
>>> from xlcalcnet import fp, mp, iv, dp, gp, ap
>>> A = [1, 2, 0.5, 7]
>>> for ctx in [fp, mp, iv, dp, gp, ap]: ctx.dps = 15;  print(repr(ctx.fprod(A)), end=', ')
7.0, mpf('7.0'), mpi('7.0', '7.0'), Decimal('7.0'), mpfr('7.0'), arb3_t('7.0'),

>>> A = [1001, 2003, 0.5, 70005]
>>> for ctx in [fp, mp, iv, dp, gp, ap]: ctx.dps = 15;  print(repr(ctx.fprod(A)))
70180117507.5
mpf('70180117507.5')
mpi('70180117507.5', '70180117507.5')
Decimal('70180117507.5')
mpfr('70180117507.5')
arb3_t('70180117507.5')
```

7.23.8 fdot: Dot product

`ctx.`**`fdot`**(*A*, *B=None*, *conjugate=False*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`. See also Mpmath [668].

!!! conjugate not working with iv !!!

Computes the dot product of the iterables A and B,

$$\sum_{k=0} A_k B_k.$$

Alternatively, *fdot()* accepts a single iterable of pairs. In other words, `fdot(A,B)` and `fdot(zip(A,B))` are equivalent. The elements are automatically converted to mpmath numbers.

With `conjugate=True`, the elements in the second vector will be conjugated:

$$\sum_{k=0} A_k \overline{B_k}$$

Examples

```
>>> from xlcalcnet import fp, mp, iv, dp, gp, ap
>>> A = [2, 1.5, 3]; B = [1, -1, 2]
>>> for ctx in [fp, mp, iv, dp, gp, ap]: ctx.dps = 15;  print(repr(ctx.fdot(A, B)), end=', ')
6.5, mpf('6.5'), mpi('6.5', '6.5'), Decimal('6.5'), mpfr('6.5'), arb3_t('6.5'),

>>> C = list(zip(A, B)); print(C)
[(2, 1), (1.5, -1), (3, 2)]
>>> for ctx in [fp, mp, iv, dp, gp, ap]: ctx.dps = 15;  print(repr(ctx.fdot(C)), end=', ')
6.5, mpf('6.5'), mpi('6.5', '6.5'), Decimal('6.5'), mpfr('6.5'), arb3_t('6.5'),

>>> A = [2, 1.5, 3j]; B = [1+1j, 3, -1-1j]
>>> for ctx in [fp, mp, iv, dp, gp, ap]: ctx.dps = 15;  print(repr(ctx.fdot(A, B)))
(9.5-1j)
mpc(real='9.5', imag='-1.0')
iv.mpc(mpi('9.5', '9.5'), mpi('-1.0', '-1.0'))
DecCplx('9.50 - 1.0j')
mpc('9.5-1.0j')
acb3_t('9.5 - 1.0j')

>>> A = [2, 1.5, 3j]; B = [1+1j, 3, -1-1j]
>>> for ctx in [fp, mp, dp, gp, ap]:
...     ctx.dps = 15;  print(repr(ctx.fdot(A, B, conjugate=True)))
(3.5-5j)
mpc(real='3.5', imag='-5.0')
DecCplx('3.50 - 5.0j')
mpc('3.5-5.0j')
acb3_t('3.5 - 5.0j')


>>> x = ap.mpf(2); x
>>> c = 3+4j; c
>>> x + c
```

7.24 Numerical transformations and descriptive statistics

7.24.1 Centering of a matrix

mat.**centered**(*res*, *data*, *population*, *opt*)

Returns the centered version of the matrix

```
>>> from arbeigenlab import mp14
>>> ctx = mp14.drf(); mp14.setdps(15)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableA6x6", ""); A.show("A")
A:
11, 12, 13, 14, 15, 16,
21, 22, 23, 24, 25, 26,
31, 32, 33, 34, 35, 36,
41, 42, 43, 44, 45, 46,
51, 52, 53, 54, 55, 56,
61, 62, 63, 64, 65, 66,

>>> B = A.centered(); B.show("B")
B:
-25, -25, -25, -25, -25, -25,
-15, -15, -15, -15, -15, -15,
 -5,  -5,  -5,  -5,  -5,  -5,
  5,   5,   5,   5,   5,   5,
 15,  15,  15,  15,  15,  15,
 25,  25,  25,  25,  25,  25,

>>> B = A.variance(); B.show("B")
B:
350, 350, 350, 350, 350, 350,


>>> B = A.stdev(); B.show("B")
```

7.24.2 Standardization of a matrix

mat.**standardized**(*res*, *data*, *population*, *opt*)

Returns the standardized version of the matrix

```
>>> from arbeigenlab import mp14
>>> ctx = mp14.drf(); mp14.setdps(5)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableA6x6", ""); A.show("A")
A:
11, 12, 13, 14, 15, 16,
21, 22, 23, 24, 25, 26,
31, 32, 33, 34, 35, 36,
41, 42, 43, 44, 45, 46,
51, 52, 53, 54, 55, 56,
61, 62, 63, 64, 65, 66,

>>> B = A.standardized(); B.show("B")
B:
 -1.336,  -1.336,  -1.336,  -1.336,  -1.336,  -1.336,
-0.8017, -0.8017, -0.8017, -0.8017, -0.8017, -0.8017,
-0.2672, -0.2672, -0.2672, -0.2672, -0.2672, -0.2672,
 0.2672,  0.2672,  0.2672,  0.2672,  0.2672,  0.2672,
 0.8017,  0.8017,  0.8017,  0.8017,  0.8017,  0.8017,
  1.336,   1.336,   1.336,   1.336,   1.336,   1.336,


>>> C = B.variance(); C.show("C")
C:
0.9996, 0.9996, 0.9996, 0.9996, 0.9996, 0.9996,
```

See also: https://en.m.wikipedia.org/wiki/Quantile

Hyndman, 1996.

The quantile functions are not working:

https://numpy.org/doc/stable/reference/generated/numpy.ptp.html#numpy.ptp

https://numpy.org/doc/stable/reference/generated/numpy.percentile.html#numpy.percentile

https://numpy.org/doc/stable/reference/generated/numpy.nanpercentile.html#numpy.nanpercentile

https://numpy.org/doc/stable/reference/generated/numpy.quantile.html#numpy.quantile

https://numpy.org/doc/stable/reference/generated/numpy.nanquantile.html#numpy.nanquantile

The correlation functions are not working:

https://numpy.org/doc/stable/reference/generated/numpy.corrcoef.html#numpy.corrcoef

https://numpy.org/doc/stable/reference/generated/numpy.correlate.html#numpy.correlate

https://numpy.org/doc/stable/reference/generated/numpy.cov.html#numpy.cov

See also Eigen [237].

7.24.3 Trace

`mat.trace()`

Returns the trace of the matrix. See also: Wikipedia [1386].

```
>>> from arbeigenlab import mp14
>>> ctx = mp14.drf()
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableA6x6", ""); A.show("A")
A:
11, 12, 13, 14, 15, 16,
21, 22, 23, 24, 25, 26,
31, 32, 33, 34, 35, 36,
41, 42, 43, 44, 45, 46,
51, 52, 53, 54, 55, 56,
61, 62, 63, 64, 65, 66,

>>> Res = A.trace(); Res.show("Res")

!!! MISSING !!!
```

7.24.4 Squared Norm

`mat.squaredNorm(`*partialmode=full*`)`

Returns the squared norm of the matrix.

```
>>> from arbeigenlab import mp14
>>> ctx = mp14.drf()
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableA6x6", ""); A.show("A")
A:
11, 12, 13, 14, 15, 16,
21, 22, 23, 24, 25, 26,
31, 32, 33, 34, 35, 36,
41, 42, 43, 44, 45, 46,
51, 52, 53, 54, 55, 56,
61, 62, 63, 64, 65, 66,

>>> Res = A.squaredNorm(); Res.show("Res")
Res:
 9526,  9964, 10414, 10876, 11350, 11836,
```

7.24.5 Euclidian Norm

mat.**Norm**(*partialmode=full*)

Returns the norm of the matrix.

```
>>> from arbeigenlab import mp14
>>> ctx = mp14.drf(); mp14.setdps(6)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableA6x6", ""); A.show("A")
A:
11, 12, 13, 14, 15, 16,
21, 22, 23, 24, 25, 26,
31, 32, 33, 34, 35, 36,
41, 42, 43, 44, 45, 46,
51, 52, 53, 54, 55, 56,
61, 62, 63, 64, 65, 66,

>>> Res = A.Norm(); Res.show("Res")
Res:
97.601, 99.820, 102.05, 104.29, 106.54, 108.79,
```

7.24.6 Covariance matrix

mat.**covariance_matrix**(*use_crossproduct=False*)

Returns the covariance matrix of the matrix. See also Wikipedia [1382], Wikipedia [1362].

```
>>> from arbeigenlab import mp14
>>> ctx = mp14.drf(); mp14.setdps(15)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableA6x6", ""); A.show("A")
A:
11, 12, 13, 14, 15, 16,
21, 22, 23, 24, 25, 26,
31, 32, 33, 34, 35, 36,
41, 42, 43, 44, 45, 46,
51, 52, 53, 54, 55, 56,
61, 62, 63, 64, 65, 66,

>>> B = A.centered(); B.show("B")
B:
-25, -25, -25, -25, -25, -25,
-15, -15, -15, -15, -15, -15,
 -5,  -5,  -5,  -5,  -5,  -5,
  5,   5,   5,   5,   5,   5,
 15,  15,  15,  15,  15,  15,
 25,  25,  25,  25,  25,  25,

>>> C = (B.T * B)/(B.cols-1); C.show("C")
C:
350, 350, 350, 350, 350, 350,
350, 350, 350, 350, 350, 350,
350, 350, 350, 350, 350, 350,
350, 350, 350, 350, 350, 350,
350, 350, 350, 350, 350, 350,
350, 350, 350, 350, 350, 350,

>>> D = A.covariance(); D.show("D")
D:
350, 350, 350, 350, 350, 350,
350, 350, 350, 350, 350, 350,
350, 350, 350, 350, 350, 350,
350, 350, 350, 350, 350, 350,
350, 350, 350, 350, 350, 350,
350, 350, 350, 350, 350, 350,
```

7.24.7 Correlation matrix

`mat.`**`correlation`**(*use_crossproduct=False*)

Returns the correlation matrix of matrix matA. See also Wikipedia [1360].

```
>>> from arbeigenlab import mp14
>>> ctx = mp14.drf(); mp14.setdps(6)
>>> A = ctx.read_from_sqlite(mp14.dbpath(), "DecTableA6x6", ""); A.show("A")
A:
11, 12, 13, 14, 15, 16,
21, 22, 23, 24, 25, 26,
31, 32, 33, 34, 35, 36,
41, 42, 43, 44, 45, 46,
51, 52, 53, 54, 55, 56,
61, 62, 63, 64, 65, 66,

>>> B = A.standardized(); B.show("B")
B:
 -1.3363,  -1.3363,  -1.3363,  -1.3363,  -1.3363,  -1.3363,
-0.80180, -0.80180, -0.80180, -0.80180, -0.80180, -0.80180,
-0.26727, -0.26727, -0.26727, -0.26727, -0.26727, -0.26727,
 0.26727,  0.26727,  0.26727,  0.26727,  0.26727,  0.26727,
 0.80180,  0.80180,  0.80180,  0.80180,  0.80180,  0.80180,
  1.3363,   1.3363,   1.3363,   1.3363,   1.3363,   1.3363,

>>> C = (B.T * B)/(B.cols-1); C.show("C")
C:
1.0000, 1.0000, 1.0000, 1.0000, 1.0000, 1.0000,
1.0000, 1.0000, 1.0000, 1.0000, 1.0000, 1.0000,
1.0000, 1.0000, 1.0000, 1.0000, 1.0000, 1.0000,
1.0000, 1.0000, 1.0000, 1.0000, 1.0000, 1.0000,
1.0000, 1.0000, 1.0000, 1.0000, 1.0000, 1.0000,
1.0000, 1.0000, 1.0000, 1.0000, 1.0000, 1.0000,


>>> D = A.correlation(); D.show("D")
D:
1.0000, 1.0000, 1.0000, 1.0000, 1.0000, 1.0000,
1.0000, 1.0000, 1.0000, 1.0000, 1.0000, 1.0000,
1.0000, 1.0000, 1.0000, 1.0000, 1.0000, 1.0000,
1.0000, 1.0000, 1.0000, 1.0000, 1.0000, 1.0000,
1.0000, 1.0000, 1.0000, 1.0000, 1.0000, 1.0000,
1.0000, 1.0000, 1.0000, 1.0000, 1.0000, 1.0000,
```

7.24.8 Summary statistic

`mat.`**`summary`**(*summary*, *data*, *population*, *opt*)

Sets *summary* to a matrix containing summary statistics of *data*.

Constant	Meaning
ARB_STAT_COUNT	1
ARB_STAT_SUM	4 = $\sum_0^1 07^e + 11^f$
ARB_STAT_MEAN	4
ARB_STAT_MIN	13
ARB_STAT_MEDIAN	1
ARB_STAT_MAX	11
ARB_STAT_AVERAGE_DEVIATION	2
ARB_STAT_SUM_OF_SQUARES_OF_DEV	14
ARB_STAT_SUM_OF_SQUARES	8
ARB_STAT_VARIANCE	11
ARB_STAT_STANDARD_DEVIATION	6
ARB_STAT_SKEWNESS	6
ARB_STAT_KURTOSIS	8
ARB_STAT_TRIMMED_MEAN	8
ARB_STAT_HARMONIC_MEAN	9
ARB_STAT_GEOMETRIC_MEAN	9

```
>>> from arbeigenlab import mp14
>>> mpm.dps = 40;
>>> A = mp14.xrf().read_from_sqlite(mp14.dbpath(), "MpfrTableA4x4", "")
>>> B = mp14.xrf().read_from_sqlite(mp14.dbpath(), "MpfrTableB4x4", "")
```

7.24.9 Vector norm of a matrix

`ctx.norm`(*x*, *p=2*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Gives the entrywise p-norm of an iterable x, i.e. the vector norm $(\sum_k |x_k|^p)^{1/p}$, for any given $1 \le p \le \infty$.

Special cases:

If x is not iterable, this just returns `absmax(x)`.

`p=1` gives the sum of absolute values.

`p=2` is the standard Euclidean vector norm.

`p=inf` gives the magnitude of the largest element.

For x a matrix, `p=2` is the Frobenius norm. For operator matrix norms, use `mnorm()` instead.

You can use the string 'inf' as well as float('inf') or mpf('inf') to specify the infinity norm.

Examples

```
>>> from xlcalcnet import *
>>> mp.dps = 15; mp.pretty = False
>>> x = matrix([-10, 2, 100])
>>> norm(x, 1)
mpf('112.0')
>>> norm(x, 2)
mpf('100.5186549850325')
>>> norm(x, inf)
mpf('100.0')
```

7.24.10 Matrix norm

`ctx.mnorm(A, p=1)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Gives the matrix (operator) p-norm of A. Currently `p=1` and `p=inf` are supported:

`p=1` gives the 1-norm (maximal column sum)

`p=inf` gives the ∞-norm (maximal row sum). You can use the string 'inf' as well as float('inf') or mpf('inf')

`p=2` (not implemented) for a square matrix is the usual spectral matrix norm, i.e. the largest singular value.

`p='f'` (or 'F', 'fro', 'Frobenius, 'frobenius') gives the Frobenius norm, which is the elementwise 2-norm. The Frobenius norm is an approximation of the spectral norm and satisfies

$$\frac{1}{\sqrt{\operatorname{rank}(A)}}\|A\|_F \leq \|A\|_2 \leq \|A\|_F$$

The Frobenius norm lacks some mathematical properties that might be expected of a norm.

For general elementwise p-norms, use `norm()` instead.

Examples

```
>>> from xlcalcnet import *
>>> mp.dps = 15; mp.pretty = False
>>> A = matrix([[1, -1000], [100, 50]])
>>> mnorm(A, 1)
mpf('1050.0')
>>> mnorm(A, inf)
mpf('1001.0')
>>> mnorm(A, 'F')
mpf('1006.2310867787777')
```

7.25 Standard decompositions and linear solving

Returns the Cholesky decomposition of the symmetric matrix *matA* $= A = PLU$, without pivoting. Here *matA* is an instance of one of the above classes.

See also Eigen [231], Wikipedia [1393], Wikipedia [1423].

7.25.1 Cholesky decomposition

`ctx.cholesky`(*A*, *tol=None*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Cholesky decomposition of a symmetric positive-definite matrix A. Returns a lower triangular matrix L such that $A = L \times L^T$. More generally, for a complex Hermitian positive-definite matrix, a Cholesky decomposition satisfying $A = L \times L^H$ is returned.

The Cholesky decomposition can be used to solve linear equation systems twice as efficiently as LU decomposition, or to test whether A is positive-definite.

The optional parameter `tol` determines the tolerance for verifying positive-definiteness.

Examples

Cholesky decomposition of a positive-definite symmetric matrix:

```
>>> from xlcalcnet import *
>>> mp.dps = 25; mp.pretty = True
>>> A = eye(3) + hilbert(3)
>>> nprint(A)
[     2.0      0.5  0.333333]
[     0.5  1.33333      0.25]
[0.333333     0.25       1.2]
>>> L = cholesky(A)
>>> nprint(L)
[ 1.41421      0.0      0.0]
[0.353553  1.09924      0.0]
[0.235702  0.15162  1.05899]
>>> chop(A - L*L.T)
[0.0  0.0  0.0]
[0.0  0.0  0.0]
[0.0  0.0  0.0]
```

Cholesky decomposition of a Hermitian matrix:

```
>>> A = eye(3) + matrix([[0,0.25j,-0.5j],[-0.25j,0,0],[0.5j,0,0]])
>>> L = cholesky(A)
>>> nprint(L)
[          1.0                0.0                0.0]
[(0.0 - 0.25j)  (0.968246 + 0.0j)                0.0]
[ (0.0 + 0.5j)  (0.129099 + 0.0j)  (0.856349 + 0.0j)]
>>> chop(A - L*L.H)
[0.0  0.0  0.0]
[0.0  0.0  0.0]
[0.0  0.0  0.0]
```

Attempted Cholesky decomposition of a matrix that is not positive definite:

```
>>> A = -eye(3) + hilbert(3)
>>> L = cholesky(A)
Traceback (most recent call last):
  ...
ValueError: matrix is not positive-definite
```

References

1. Wikipedia: http://en.wikipedia.org/wiki/Cholesky_decomposition

7.25.2 Cholesky decomposition, solve

`ctx.cholesky_solve(A, b, **kwargs)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Solves a symmetric positive-definite linear equation system. This is twice as efficient as lu_solve.

Returns the LU decomposition of the general square matrix *matA* $= A = PLU$, with partial pivoting.

See also Eigen [232], Wikipedia [1405], Wikipedia [1423].

7.25.3 Matrix LU factorization

`ctx.lu(A)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

A -> P, L, U

LU factorisation of a square matrix A. L is the lower, U the upper part. P is the permutation matrix indicating the row swaps.

P*A = L*U

If you need efficiency, use the low-level method LU_decomp instead, it's much more memory efficient.

The function `lu` computes an explicit LU factorization of a matrix:

```
>>> P, L, U = lu(matrix([[0,2,3],[4,5,6],[7,8,9]]))
>>> print(P)
[0.0  0.0  1.0]
[1.0  0.0  0.0]
[0.0  1.0  0.0]
>>> print(L)
[              1.0                0.0  0.0]
[              0.0                1.0  0.0]
[0.571428571428571  0.214285714285714  1.0]
>>> print(U)
[7.0  8.0                9.0]
[0.0  2.0                3.0]
[0.0  0.0  0.214285714285714]
>>> print(P.T*L*U)
[0.0  2.0  3.0]
[4.0  5.0  6.0]
[7.0  8.0  9.0]
```

7.25.4 Determinant of a matrix, using LU decomposition

`ctx.det(A)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Calculates the determinant of a matrix, using the LU factorization.

7.25.5 Inverse of a matrix, using the LU factorization

`ctx.inverse(A, **kwargs)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Calculates the inverse of a matrix, using the LU factorization.

If you want to solve an equation system Ax = b, it's recommended to use solve(A, b) instead, it's about 3 times more efficient.

7.25.6 Linear equations: LU solve

`ctx.lu_solve`(*A*, *b*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Basic linear algebra is implemented; you can for example solve the linear equation system:

```
  x + 2*y = -10
3*x + 4*y =  10
```

using `lu_solve`:

```
>>> from xlcalcnet import *
>>> mp.pretty = False
>>> A = matrix([[1, 2], [3, 4]])
>>> b = matrix([-10, 10])
>>> x = lu_solve(A, b)
>>> x
matrix(
[['30.0'],
 ['-20.0']])
```

7.25.7 Linear equations: residual of LU solve

`ctx.residual`(*A*, *x*, *b*, ***kwargs*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Calculate the residual of a solution to a linear equation system.

r = A*x - b for A*x = b

If you don't trust the result, use `residual` to calculate the residual ||A*x-b||:

```
>>> residual(A, x, b)
matrix(
[['3.46944695195361e-18'],
 ['3.46944695195361e-18']])
>>> str(eps)
'2.22044604925031e-16'
```

As you can see, the solution is quite accurate. The error is caused by the inaccuracy of the internal floating point arithmetic. Though, it's even smaller than the current machine epsilon, which basically means you can trust the result.

`lu_solve` accepts overdetermined systems. It is usually not possible to solve such systems, so the residual is minimized instead. Internally this is done using Cholesky decomposition to compute a least squares approximation. This means that `lu_solve` will square the errors. If you can't afford this, use `qr_solve` instead. It is twice as slow but more accurate, and it calculates the residual automatically.

7.25.8 ??? LU improve solution

`improve_solution`(*ctx*, *A*, *x*, *b*, *maxsteps=1*)

Improve a solution to a linear equation system iteratively.

This re-uses the LU decomposition and is thus cheap. Usually 3 up to 4 iterations are giving the maximal improvement.

7.25.9 mpmath: LU condition number

`ctx.cond`(*A*, *norm=None*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Calculates the condition number of a matrix using a specified matrix norm.

The condition number estimates the sensitivity of a matrix to errors. Example: small input errors for ill-conditioned coefficient matrices alter the solution of the system dramatically.

For ill-conditioned matrices it's recommended to use qr_solve() instead of lu_solve(). This does not help with input errors however, it just avoids to add additional errors.

Definition: cond(A) = ||A|| * ||A**-1||

Returns the QR decomposition of the symmetric matrix *matA* $= A = QR$, without pivoting.

See also Eigen [228], Wikipedia [1427], Wikipedia [1423].

7.25.10 QR factorization

`ctx.qr`(*A*, *mode='full'*, *edps=10*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Compute a QR factorization $A = QR$ where A is an m x n matrix of real or complex numbers where m >= n

mode has following meanings: (1) mode = 'raw' returns two matrixes (A, tau) in the internal format used by LAPACK (2) mode = 'skinny' returns the leading n columns of Q and n rows of R (3) Any other value returns the leading m columns of Q and m rows of R

edps is the increase in mp precision used for calculations

Examples

```
>>> from xlcalcnet import *
>>> mp.dps = 15
>>> mp.pretty = True
>>> A = matrix([[1, 2], [3, 4], [1, 1]])
>>> Q, R = qr(A)
>>> Q
[-0.301511344577764   0.861640436855329   0.408248290463863]
[-0.904534033733291  -0.123091490979333  -0.408248290463863]
[-0.301511344577764  -0.492365963917331   0.816496580927726]
>>> R
[-3.3166247903554  -4.52267016866645]
[             0.0  0.738548945875996]
[             0.0                0.0]
>>> Q * R
[1.0  2.0]
[3.0  4.0]
[1.0  1.0]
>>> chop(Q.T * Q)
[1.0  0.0  0.0]
[0.0  1.0  0.0]
[0.0  0.0  1.0]
>>> B = matrix([[1+0j, 2-3j], [3+j, 4+5j]])
>>> Q, R = qr(B)
>>> nprint(Q)
[     (-0.301511 + 0.0j)   (0.0695795 - 0.95092j)]
[(-0.904534 - 0.301511j)  (-0.115966 + 0.278318j)]
>>> nprint(R)
[(-3.31662 + 0.0j)  (-5.72872 - 2.41209j)]
[              0.0       (3.91965 + 0.0j)]
>>> Q * R
[(1.0 + 0.0j)  (2.0 - 3.0j)]
[(3.0 + 1.0j)  (4.0 + 5.0j)]
>>> chop(Q.T * Q.conjugate())
[1.0  0.0]
[0.0  1.0]
```

7.25.11 QR solve

`ctx.qr_solve`(*A*, *b*, *norm=None*, ***kwargs*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Ax = b => x, ||Ax - b||

Solve a determined or overdetermined linear equations system and calculate the norm of the residual (error). QR decomposition using Householder factorization is applied, which gives very accurate results even for ill-conditioned matrices. lu_solve is twice as efficient.

7.26 Singular Value and Eigen decompositions

See: https://math.stackexchange.com/questions/1816364/the-svd-solution-to-linear-least-squares-linear-system-of-equations

Returns the SVD decomposition of a rectangular matrix.

See also Eigen [229], Wikipedia [1411], Wikipedia [1423].

7.26.1 Real singular value decomposition of a matrix A

`ctx.svd_r`(*A*, *full_matrices=False*, *compute_uv=True*, *overwrite_a=False*)

where `ctx` is `dec`, `mpm`, `fpm``or ``gmp`.

This routine computes the singular value decomposition of a matrix A. Given A, two orthogonal matrices U and V are calculated such that

A = U S V and U' U = 1 and V V' = 1

where S is a suitable shaped matrix whose off-diagonal elements are zero. Here ' denotes the transpose. The diagonal elements of S are the singular values of A, i.e. the positive square roots of the eigenvalues of A' A or A A'.

input:

A : a real matrix of shape (m, n)

full_matrices
: [if true, U and V are of shape (m, m) and (n, n).] if false, U and V are of shape (m, min(m, n)) and (min(m, n), n).

compute_uv : if true, U and V are calculated. if false, only S is calculated.

overwrite_a
: [if true, allows modification of A which may improve] performance. if false, A is not modified.

output:

U
: [an orthogonal matrix: U' U = 1. if full_matrices is true, U is of] shape (m, m). ortherwise it is of shape (m, min(m, n)).

S
: [an array of length min(m, n) containing the singular values of A sorted by] decreasing magnitude.

V
: [an orthogonal matrix: V V' = 1. if full_matrices is true, V is of] shape (n, n). ortherwise it is of shape (min(m, n), n).

return value:

S if compute_uv is false

(U, S, V) if compute_uv is true

overview of the matrices:

full_matrices true:

A : m*n

U : m*m U' U = 1

S as matrix : m*n

V : n*n V V' = 1

full_matrices false:

A : m*n

U : m*min(n,m) U' U = 1

S as matrix : min(m,n)*min(m,n)

V : min(m,n)*n V V' = 1

examples:

```
>>> from mpmath import mp
>>> A = mp.matrix([[2, -2, -1], [3, 4, -2], [-2, -2, 0]])
>>> S = mp.svd_r(A, compute_uv = False)
>>> print(S)
[6.0]
[3.0]
[1.0]
```

```
>>> U, S, V = mp.svd_r(A)
>>> print(mp.chop(A - U * mp.diag(S) * V))
[0.0  0.0  0.0]
[0.0  0.0  0.0]
[0.0  0.0  0.0]
```

see also: svd, svd_c

7.26.2 Complex singular value decomposition of a matrix A

`ctx.svd_c`(*A*, *full_matrices=False*, *compute_uv=True*, *overwrite_a=False*)

where `ctx` is `dec`, `mpm`, `fpm``or ``gmp`.

This routine computes the singular value decomposition of a matrix A. Given A, two unitary matrices U and V are calculated such that

A = U S V and U' U = 1 and V V' = 1

where S is a suitable shaped matrix whose off-diagonal elements are zero. Here ' denotes the hermitian transpose (i.e. transposition and complex conjugation). The diagonal elements of S are the singular values of A, i.e. the positive square roots of the eigenvalues of A' A or A A'.

input:

A : a complex matrix of shape (m, n)

full_matrices : if true, U and V are of shape (m, m) and (n, n).

if false, U and V are of shape (m, min(m, n)) and (min(m, n), n).

compute_uv : if true, U and V are calculated. if false, only S is calculated.

overwrite_a
[if true, allows modification of A which may improve] performance. if false, A is not modified.

output:

U
[an unitary matrix: U' U = 1. if full_matrices is true, U is of] shape (m, m). ortherwise it is of shape (m, min(m, n)).

S
[an array of length min(m, n) containing the singular values of A sorted by] decreasing magnitude.

V
[an unitary matrix: V V' = 1. if full_matrices is true, V is of] shape (n, n). ortherwise it is of shape (min(m, n), n).

return value:

S if compute_uv is false

(U, S, V) if compute_uv is true

overview of the matrices:

full_matrices true:

A : m*n

U : m*m U' U = 1

S as matrix : m*n

V : n*n V V' = 1

full_matrices false:

A : m*n

U : m*min(n,m) U' U = 1

S as matrix : min(m,n)*min(m,n)

V : min(m,n)*n V V' = 1

example:

```
>>> from mpmath import mp
>>> A = mp.matrix([[-2j, -1-3j, -2+2j], [2-2j, -1-3j, 1], [-3+1j,-2j,0]])
>>> S = mp.svd_c(A, compute_uv = False)
>>> print(mp.chop(S - mp.matrix([mp.sqrt(34), mp.sqrt(15), mp.sqrt(6)])))
[0.0]
[0.0]
[0.0]
```

```
>>> U, S, V = mp.svd_c(A)
>>> print(mp.chop(A - U * mp.diag(S) * V))
[0.0  0.0  0.0]
[0.0  0.0  0.0]
[0.0  0.0  0.0]
```

see also: svd, svd_r

7.26.3 mpmath: Singular value decomposition of a matrix A (real or complex)

`ctx.svd`(*A*, *full_matrices=False*, *compute_uv=True*, *overwrite_a=False*)

where `ctx` is `dec`, `mpm`, `fpm``or ``gmp`.

"svd" is a unified interface for "svd_r" and "svd_c". Depending on whether A is real or complex the appropriate function is called.

This routine computes the singular value decomposition of a matrix A. Given A, two orthogonal (A real) or unitary (A complex) matrices U and V are calculated such that

A = U S V and U' U = 1 and V V' = 1

where S is a suitable shaped matrix whose off-diagonal elements are zero. Here ' denotes the hermitian transpose (i.e. transposition and complex conjugation). The diagonal elements of S are the singular values of A, i.e. the squareroots of the eigenvalues of A' A or A A'.

input:

A : a real or complex matrix of shape (m, n)

full_matrices : if true, U and V are of shape (m, m) and (n, n). if false, U and V are of shape (m, min(m, n)) and (min(m, n), n).

compute_uv : if true, U and V are calculated. if false, only S is calculated.

overwrite_a : if true, allows modification of A which may improve performance. if false, A is not modified.

output:

U

[an orthogonal or unitary matrix: U' U = 1. if full_matrices is true, U is of] shape (m, m). ortherwise it is of shape (m, min(m, n)).

S

[an array of length min(m, n) containing the singular values of A sorted by] decreasing magnitude.

V

[an orthogonal or unitary matrix: V V' = 1. if full_matrices is true, V is of] shape (n, n). ortherwise it is of shape (min(m, n), n).

return value:

S if compute_uv is false

(U, S, V) if compute_uv is true

overview of the matrices:

full_matrices true: A : m*n U : m*m U' U = 1 S as matrix : m*n V : n*n V V' = 1

full_matrices false: A : m*n U : m*min(n,m) U' U = 1 S as matrix : min(m,n)*min(m,n) V : min(m,n)*n V V' = 1

examples:

```
>>> from mpmath import mp
>>> A = mp.matrix([[2, -2, -1], [3, 4, -2], [-2, -2, 0]])
>>> S = mp.svd(A, compute_uv = False)
>>> print(S)
[6.0]
[3.0]
[1.0]
```

```
>>> U, S, V = mp.svd(A)
>>> print(mp.chop(A - U * mp.diag(S) * V))
[0.0  0.0  0.0]
[0.0  0.0  0.0]
[0.0  0.0  0.0]
```

see also: svd_r, svd_c

7.26.4 Eigenvalue problem for a real symmetric square matrix A

`ctx.eigsy`(*d*, *e*, *z=False*)

where `ctx` is `dec`, `mpm`, `fpm``or ``gmp`.

Returns the eigendecomposition of the symmetric/hermitian matrix *matA* $= A$.

See also Eigen [238], Wikipedia [1396], Wikipedia [1398], Wikipedia [1423].

This routine solves the (ordinary) eigenvalue problem for a real symmetric square matrix A. Given A, an orthogonal matrix Q is calculated which diagonalizes A : $Q' A Q = \mathrm{diag}(E)$ and $Q Q^T = Q^T Q = 1$

Here diag(E) is a diagonal matrix whose diagonal is E.

The columns of Q are the eigenvectors of A and E contains the eigenvalues:

```
A * Q[:,i] = E[i] * Q[:,i]
```

input:

A: real matrix of format (n,n) which is symmetric (i.e. A=A' or A[i,j]=A[j,i])

eigvals_only: if true, calculates only the eigenvalues E. if false, calculates both eigenvectors and eigenvalues.

overwrite_a: if true, allows modification of A which may improve performance. if false, A is not modified.

output:

E: vector of format (n). contains the eigenvalues of A in ascending order.

Q: orthogonal matrix of format (n,n). contains the eigenvectors of A as columns.

return value:

E if eigvals_only is true

(E, Q) if eigvals_only is false

example:

```
>>> from mpmath import mp
>>> A = mp.matrix([[3, 2], [2, 0]])
>>> E = mp.eigsy(A, eigvals_only = True)
>>> print(E)
[-1.0]
[ 4.0]
```

```
>>> A = mp.matrix([[1, 2], [2, 3]])
>>> E, Q = mp.eigsy(A)
>>> print(mp.chop(A * Q[:,0] - E[0] * Q[:,0]))
[0.0]
[0.0]
```

see also: eighe, eigh, eig

7.26.5 Eigenvalue problem for a complex hermitian square matrix A

`ctx.eighe`(*A*, *eigvals_only=False*, *overwrite_a=False*)

where `ctx` is `dec`, `mpm`, `fpm``or ``gmp`.

This routine solves the (ordinary) eigenvalue problem for a complex hermitian square matrix A. Given A, an unitary matrix Q is calculated which diagonalizes A:

Q' A Q = diag(E) and Q Q' = Q' Q = 1

Here diag(E) a is diagonal matrix whose diagonal is E. ' denotes the hermitian transpose (i.e. ordinary transposition and complex conjugation).

The columns of Q are the eigenvectors of A and E contains the eigenvalues:

A Q[:,i] = E[i] Q[:,i]

input:

A: complex matrix of format (n,n) which is hermitian
(i.e. A=A' or A[i,j]=conj(A[j,i]))

eigvals_only: if true, calculates only the eigenvalues E.
if false, calculates both eigenvectors and eigenvalues.

overwrite_a: if true, allows modification of A which may improve
performance. if false, A is not modified.

output:

E: vector of format (n). contains the eigenvalues of A in ascending order.

Q: unitary matrix of format (n,n). contains the eigenvectors
of A as columns.

return value:

E if eigvals_only is true

(E, Q) if eigvals_only is false

example:

```
>>> from mpmath import mp
>>> A = mp.matrix([[1, -3 - 1j], [-3 + 1j, -2]])
>>> E = mp.eighe(A, eigvals_only = True)
>>> print(E)
[-4.0]
[ 3.0]
```

```
>>> A = mp.matrix([[1, 2 + 5j], [2 - 5j, 3]])
>>> E, Q = mp.eighe(A)
>>> print(mp.chop(A * Q[:,0] - E[0] * Q[:,0]))
[0.0]
[0.0]
```

see also: eigsy, eigh, eig

7.26.6 mpmath: Eigenvalue problem for a selfadjoint square matrix A

`ctx.eigh`(*A*, *eigvals_only=False*, *overwrite_a=False*)

where `ctx` is `dec`, `mpm`, `fpm``or ``gmp`.

“eigh” is a unified interface for “eigsy” and “eighe”. Depending on whether A is real or complex the appropriate function is called.

This routine solves the (ordinary) eigenvalue problem for a real symmetric or complex hermitian square matrix A. Given A, an orthogonal (A real) or unitary (A complex) matrix Q is calculated which diagonalizes A:

Q’ A Q = diag(E) and Q Q’ = Q’ Q = 1

Here diag(E) a is diagonal matrix whose diagonal is E. ‘ denotes the hermitian transpose (i.e. ordinary transposition and complex conjugation).

The columns of Q are the eigenvectors of A and E contains the eigenvalues:

A Q[:,i] = E[i] Q[:,i]

input:

A: a real or complex square matrix of format (n,n) which is symmetric
(i.e. A[i,j]=A[j,i]) or hermitian (i.e. A[i,j]=conj(A[j,i])).

eigvals_only: if true, calculates only the eigenvalues E.
if false, calculates both eigenvectors and eigenvalues.

overwrite_a: if true, allows modification of A which may improve
performance. if false, A is not modified.

output:

E: vector of format (n). contains the eigenvalues of A in ascending order.

Q: an orthogonal or unitary matrix of format (n,n). contains the
eigenvectors of A as columns.

return value:

E if eigvals_only is true

(E, Q) if eigvals_only is false

example:

```
>>> from mpmath import mp
>>> A = mp.matrix([[3, 2], [2, 0]])
>>> E = mp.eigh(A, eigvals_only = True)
>>> print(E)
[-1.0]
[ 4.0]
```

```
>>> A = mp.matrix([[1, 2], [2, 3]])
>>> E, Q = mp.eigh(A)
>>> print(mp.chop(A * Q[:,0] - E[0] * Q[:,0]))
[0.0]
[0.0]
```

```
>>> A = mp.matrix([[1, 2 + 5j], [2 - 5j, 3]])
>>> E, Q = mp.eigh(A)
>>> print(mp.chop(A * Q[:,0] - E[0] * Q[:,0]))
[0.0]
[0.0]
```

see also: eigsy, eighe, eig

7.26.7 mpmath: tridiag_sym

r_sy_tridiag(*ctx*, *A*, *D*, *E*, *calc_ev=True*)

This routine transforms a real symmetric matrix A to a real symmetric tridiagonal matrix S using an orthogonal similarity transformation:

$$Q^T A Q = S$$

Returns the tridiagonal decomposition of a selfadjoint matrix. See also Eigen [239], Wikipedia [1413], Wikipedia [1403], Wikipedia [1398], Wikipedia [1423].

The orthogonal matrix Q is build up from Householder reflectors.

parameters:

A: On input, A contains the real symmetric matrix of dimension (n, n). On output, if calc_ev is true, A contains the orthogonal matrix Q, otherwise A is destroyed.

D: Returns a real array of length n, containing the diagonal elements of the tridiagonal matrix.

E: Returns a real array of length n, contains the offdiagonal elements of the tridiagonal matrix in ''E[0:(n-1)]" where ''n" is the dimension of the matrix A. ''E[n-1]" is undefined.

calc_ev: If calc_ev is true, this routine explicitly calculates the orthogonal matrix Q which is then returned in A. If calc_ev is false, Q is not explicitly calculated resulting in a shorter run time.

This routine is a python translation of the fortran routine tred2.f in the software library EISPACK (see netlib.org) which itself is based on the algol procedure tred2 described in:

Num. Math. 11, p.181-195 (1968) by Martin, Reinsch and Wilkonson

Handbook for auto. comp., Vol II, Linear Algebra, p.212-226 (1971)

For a good introduction to Householder reflections, see also Stoer, Bulirsch - Introduction to Numerical Analysis.

7.26.8 mpmath tridiag_her

c_he_tridiag_0(*ctx*, *A*, *D*, *E*, *S*)

This routine transforms a complex hermitian matrix A to a real symmetric tridiagonal matrix S using an unitary similarity transformation:

$$Q^H A Q = S$$

where Q^H denotes the hermitian matrix transpose, i.e. transposition und conjugation.The unitary matrix Q is build up from Householder reflectors and an unitary diagonal matrix.

parameters:

A: (input/output) On input, A contains the complex hermitian matrix of dimension (n,n). On output, A contains the unitary matrix Q in compressed form.

D: Returns a real array of length n, contains the diagonal elements of the tridiagonal matrix.

E: Returns a real array of length n, contains the offdiagonal elements of the tridiagonal matrix in E[0:(n-1)] where is the dimension of the matrix A. E[n-1] is undefined.

S: Returns a complex array of length n, contains a unitary diagonal matrix.

This routine is a python translation (in slightly modified form) of the fortran routine htridi.f in the software library EISPACK (see netlib.org) which itself is a complex version of the algol procedure tred1 described in:

Num. Math. 11, p.181-195 (1968) by Martin, Reinsch and Wilkonson Handbook for auto. comp., Vol II, Linear Algebra, p.212-226 (1971)

For a good introduction to Householder reflections, see also Stoer, Bulirsch - Introduction to Numerical Analysis.

7.26.9 mpmath: tridiag_eigen_sym

tridiag_eigen(*ctx*, *d*, *e*, *z=False*)

This subroutine find the eigenvalues and the first components of the eigenvectors of a real symmetric tridiagonal matrix using the implicit QL method.

parameters:

d: (input/output) real array of length n. on input, d contains the diagonal elements of the input matrix. on output, d contains the eigenvalues in ascending order.

e: (input) real array of length n. on input, e contains the offdiagonal elements of the input matrix in e[0:(n-1)]. On output, e has been destroyed.

z: (input/output) If z is equal to False, no eigenvectors will be computed. Otherwise on input z should have the format z[0:m,0:n] (i.e. a real or complex matrix of dimension (m,n)). On output this matrix will be multiplied by the matrix of the eigenvectors (i.e. the columns of this matrix are the eigenvectors): z –> z*EV That means if z[i,j]={1 if j==j; 0 otherwise} on input, then on output z will contain the first m components of the eigenvectors. That means if m is equal to n, the i-th eigenvector will be z[:,i].

This routine is a python translation (in slightly modified form) of the fortran routine imtql2.f in the software library EISPACK (see netlib.org) which itself is based on the algol procudure imtql2 desribed in:

num. math. 12, p. 377-383(1968) by matrin and wilkinson modified in num. math. 15, p. 450(1970) by dubrulle handbook for auto. comp., vol. II-linear algebra, p. 241-248 (1971)

See also the routine gaussq.f in netlog.org or acm algorithm 726.

7.26.10 Eigensystem decomposition of a matrix A (real or complex)

Returns the eigendecomposition of a general square matrix *matA* $= A$. See also Eigen [221], Wikipedia [1396], Wikipedia [1398], Wikipedia [1423].

`ctx.eig`(*A*, *left=False*, *right=True*, *overwrite_a=False*)

where `ctx` is `dec`, `mpm`, `fpm``or ``gmp`.

This routine computes the eigenvalues and optionally the left and right eigenvectors of a square matrix A. Given A, a vector E and matrices ER and EL are calculated such that

A ER[:,i] = E[i] ER[:,i]

EL[i,:] A = EL[i,:] E[i]

E contains the eigenvalues of A. The columns of ER contain the right eigenvectors of A whereas the rows of EL contain the left eigenvectors.

input:

A : a real or complex square matrix of shape (n, n) left : if true, the left eigenvectors are calulated. right : if true, the right eigenvectors are calculated. overwrite_a : if true, allows modification of A which may improve performance. if false, A is not modified.

output:

E : a list of length n containing the eigenvalues of A. ER : a matrix whose columns contain the right eigenvectors of A. EL : a matrix whose rows contain the left eigenvectors of A.

return values:

E if left and right are both false. (E, ER) if right is true and left is false. (E, EL) if left is true and right is false. (E, EL, ER) if left and right are true.

examples:

```
>>> from mpmath import mp
>>> A = mp.matrix([[3, -1, 2], [2, 5, -5], [-2, -3, 7]])
>>> E, ER = mp.eig(A)
>>> print(mp.chop(A * ER[:,0] - E[0] * ER[:,0]))
[0.0]
[0.0]
[0.0]
```

```
>>> E, EL, ER = mp.eig(A,left = True, right = True)
>>> E, EL, ER = mp.eig_sort(E, EL, ER)
>>> mp.nprint(E)
[2.0, 4.0, 9.0]
>>> print(mp.chop(A * ER[:,0] - E[0] * ER[:,0]))
[0.0]
[0.0]
[0.0]
>>> print(mp.chop( EL[0,:] * A - EL[0,:] * E[0]))
[0.0  0.0  0.0]
```

warning:

- If there are multiple eigenvalues, the eigenvectors do not necessarily span the whole vectorspace, i.e. ER and EL may have not full rank. Furthermore in that case the eigenvectors are numerical ill-conditioned.
- In the general case the eigenvalues have no natural order.

see also:

- eigh (or eigsy, eighe) for the symmetric eigenvalue problem.
- eig_sort for sorting of eigenvalues and eigenvectors

7.26.11 Sorting Eigenvalues

`ctx.`**`eig_sort`**(*E*, *EL=False*, *ER=False*, *f='real'*)

where `ctx` is `dec`, `mpm`, `fpm``or ``gmp`.

This routine sorts the eigenvalues and eigenvectors delivered by `eig`.

parameters:

E : the eigenvalues as delivered by eig

EL : the left eigenvectors as delivered by eig, or false

ER : the right eigenvectors as delivered by eig, or false

f : either a string (`real` sort by increasing real part, `imag` sort by increasing imag part, `abs` sort by absolute value) or a function mapping complexs to the reals, i.e. `f = lambda x: -mp.re(x)` would sort the eigenvalues by decreasing real part.

return values:

E if EL and ER are both false.

(E, ER) if ER is not false and left is false.

(E, EL) if EL is not false and right is false.

(E, EL, ER) if EL and ER are not false.

example:

```
>>> from mpmath import mp
>>> A = mp.matrix([[3, -1, 2], [2, 5, -5], [-2, -3, 7]])
>>> E, EL, ER = mp.eig(A,left = True, right = True)
>>> E, EL, ER = mp.eig_sort(E, EL, ER)
>>> mp.nprint(E)
[2.0, 4.0, 9.0]
>>> E, EL, ER = mp.eig_sort(E, EL, ER,f = lambda x: -mp.re(x))
>>> mp.nprint(E)
[9.0, 4.0, 2.0]
>>> print(mp.chop(A * ER[:,0] - E[0] * ER[:,0]))
[0.0]
[0.0]
[0.0]
>>> print(mp.chop( EL[0,:] * A - EL[0,:] * E[0]))
[0.0  0.0  0.0]
```

7.26.12 mpmath: Hessenberg decomposition of a matrix A (real or complex)

`ctx.`**`hessenberg`**(*A*, *overwrite_a=False*)

where `ctx` is `dec`, `mpm`, `fpm``or ``gmp`.

Reduces a square matrix to Hessenberg form by an orthogonal similarity transformation. See also Eigen [227], Wikipedia [1402], Wikipedia [1423].

This routine computes the Hessenberg decomposition of a square matrix A. Given A, an unitary matrix Q is determined such that

Q' A Q = H and Q' Q = Q Q' = 1

where H is an upper right Hessenberg matrix. Here ' denotes the hermitian transpose (i.e. transposition and conjugation).

input:
A : a real or complex square matrix overwrite_a : if true, allows modification of A which may improve performance. if false, A is not modified.

output:
Q : an unitary matrix H : an upper right Hessenberg matrix

example:

```
>>> from mpmath import mp
>>> A = mp.matrix([[3, -1, 2], [2, 5, -5], [-2, -3, 7]])
>>> Q, H = mp.hessenberg(A)
>>> mp.nprint(H, 3)
[  3.15  2.23  4.44]
[-0.769  4.85  3.05]
[   0.0  3.61   7.0]
>>> print(mp.chop(A - Q * H * Q.transpose_conj()))
[0.0  0.0  0.0]
[0.0  0.0  0.0]
[0.0  0.0  0.0]
```

return value: (Q, H)

7.26.13 Schur decomposition of a matrix A (real or complex)

`ctx.schur`(*A*, *overwrite_a=False*)

where `ctx` is `dec`, `mpm`, `fpm``or ``gmp`.

Performs a Schur decomposition of a square matrix.

See also Eigen [236], Eigen [222], Wikipedia [1430], Wikipedia [1423].

This routine computes the Schur decomposition of a square matrix A. Given A, an unitary matrix Q is determined such that

Q' A Q = R and Q' Q = Q Q' = 1

where R is an upper right triangular matrix. Here ' denotes the hermitian transpose (i.e. transposition and conjugation).

input:
A : a real or complex square matrix overwrite_a : if true, allows modification of A which may improve performance. if false, A is not modified.

output:
Q : an unitary matrix R : an upper right triangular matrix

return value: (Q, R)

example:

```
>>> from mpmath import mp
>>> A = mp.matrix([[3, -1, 2], [2, 5, -5], [-2, -3, 7]])
>>> Q, R = mp.schur(A)
>>> mp.nprint(R, 3)
[2.0  0.417  -2.53]
[0.0    4.0  -4.74]
[0.0    0.0    9.0]
>>> print(mp.chop(A - Q * R * Q.transpose_conj()))
```

(continues on next page)

(continued from previous page)

```
[0.0  0.0  0.0]
[0.0  0.0  0.0]
[0.0  0.0  0.0]
```

warning: The Schur decomposition is not unique.

Part II

Special Functions

CHAPTER

EIGHT

ELLIPTIC FUNCTIONS AND RELATED

Elliptic functions historically comprise the elliptic integrals and their inverses, and originate from the problem of computing the arc length of an ellipse. From a more modern point of view, an elliptic function is defined as a doubly periodic function, i.e. a function which satisfies

$$f(z + 2\omega_1) = f(z + 2\omega_2) = f(z)$$

for some half-periods ω_1, ω_2 with $\mathrm{Im}[\omega_1/\omega_2] > 0$. The canonical elliptic functions are the Jacobi elliptic functions. More broadly, this section includes quasi-doubly periodic functions (such as the Jacobi theta functions) and other functions useful in the study of elliptic functions.

Many different conventions for the arguments of elliptic functions are in use. It is even standard to use different parameterizations for different functions in the same text or software. The usual parameters are the elliptic nome q or $\bar{q} = q^2$ (see Wikipedia [1353], MathWorld [995]), which usually must satisfy $|q| < 1$; the elliptic parameter m (an arbitrary complex number, see MathWorld [996]); the elliptic modulus k (an arbitrary complex number, see MathWorld [994].); and the half-period ratio τ (see Wikipedia [1351], MathWorld [999].), which usually must satisfy $\mathrm{Im}[\tau] > 0$.

In the context of Weierstrass elliptic functions, we also have the lattice roots e_1, e_2, e_3, which are the roots of the polynomial $4z^3 - g_2 z - g_3$, where g_2 and g_3 are the lattice invariants.

These quantities can be expressed in terms of each other using the following relations:

$$m = k^2 = \frac{e_3 - e_2}{e_1 - e_2}$$

$$\tau(m) = i\frac{K(1-m)}{K(m)}$$

$$q(\tau) = e^{i\pi\tau}$$

$$\bar{q}(\tau) = q^2(\tau) = e^{2i\pi\tau}$$

$$q(k) = \exp\left(-\pi\frac{K'(k)}{K(k)}\right)$$

$$k(q) = \frac{\theta_2^2(q)}{\theta_3^2(q)},$$

where $K(\cdot)$ denotes the complete elliptic integral of the first kind (Legendre), and $\theta_i(q)$ denote the Jacobi theta functions.

See also Wikipedia [1305], Wikipedia [1298], MathWorld [959], MathWorld [951], NIST [474].

The source code for the C# tests in Visual Studio is divided by real and complex modules:

The source code for the C# tests in Visual Studio using real modules can be found online in the `XlCalcNet` repository or in the corresponding local `XlCalcNet` folder in the file B08a_RealEllipticFunctions.cs,

The source code for the C# tests in Visual Studio using complex modules can be found online in the `XlCalcNet` repository or in the corresponding local `XlCalcNet` folder in the file B08b_CplxEllipticFunctions.cs,

8.1 Carlson symmetric elliptic integrals

8.1.1 Carlson symmetric elliptic integral of the first kind, $R_F(x, y, z)$

`ctx.elliptic_rf`(x, y, z)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns the Carlson symmetric elliptic integral of the first kind, $R_F(x, y, z)$, which is defined for $x, y, z \notin (-\infty, 0)$, and with at most one of x, y, z being zero. See also Wikipedia [1293], NIST [172], BoostMath [136], Ehrhardt [295] (3.2.2.2), Flint [744], Mpmath [641].

$$R_F(x, y, z) = \frac{1}{2} \int_0^\infty \frac{\mathrm{d}t}{\sqrt{(t+x)(t+y)(t+z)}}$$

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; y = 2.7; z = 1.3; gui.setdps(90)
>>> for ctx in gui.ctxlist_noipm_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.elliptic_rf(x, y, z)))
    fpm:  0.599561454504973
    mpm:  0.599561454504973434494591386846386915431885761091803970274713411012626891545887635046174068
    dpm:  0.599561454504973434494591386846386915431885761091803970274713411012626891545887635046174068
    gpm:  0.599561454504973434494591386846386915431885761091803970274713411012626891545887635046174068
    apm: ([0.599561454504973434494591386846386915431885761091803970274713411012626891545887635046174068 +/- 3.59e-91],␣
↪0)
 math53:  0.599561454504973
  sreal:  0.5995615
  dreal:  0.599561454504973
  ereal:  0.59956145450497343446
  qreal:  0.599561454504973434494591386846387
  oreal:  0.599561454504973434494591386846386915431885761091803970274713411012626891545887635046174068
  mreal:  0.599561454504973434494591386846386915431885761091803970274713411012626891545887635046174068
 sflint:  0.5995615
 dflint:  0.599561454504973
 eflint:  0.59956145450497343451
 qflint:  0.599561454504973434494591386846387
 oflint:  0.599561454504973434494591386846386915431885761091803970274713411012626891545887635046174068
 mflint:  0.599561454504973434494591386846386915431885761091803970274713411012626891545887635046174068
 aflint: [0.599561454504973434494591386846386915431885761091803970274713411012626891545887635046174068 +/- 2.98e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  y = 2.7+2j; z = 1.3+2j;  gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.elliptic_rf(x, y, z)))
    fpm:  (0.406346809053485, -0.408712185367039)
    mpm:  (0.406346809053485406878945606147338325457278110986679449892518286213613251646468792703839987, -0.408712185367038816093937231856418037956)
cmath53:  (0.406346809053458, -0.408712185367011)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  y = 2.7+2j; z = 1.3+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.elliptic_rf(x, y, z))))
    fpm:  0.406346809053485
    mpm:  0.406346809053485406878945606147338325457278110986679449892518286213613251646468792703839987
    dpm:  0.406346809053485406878945606147338325457278110986679449892518286213613251646468792703839987
    gpm:  0.406346809053485406878945606147338325457278110986679449892518286213613251646468792703839987
    apm: [0.406346809053485406878945606147338325457278110986679449892518286213613251646468792703840 0 +/- 4.38e-89]
cmath53:  0.406346809053458
sflintc:  0.4063468
dflintc:  0.406346809053485
```

(continues on next page)

(continued from previous page)

```
eflintc:  0.40634680905348540689
qflintc:  0.406346809053485406878945606147338
oflintc:  0.4063468090534854068789456061473383254572781109866794498925182862136132516464687927038399 87
mflintc:  0.4063468090534854068789456061473383254572781109866794498925182862136132516464687927038399 87
aflintc: [0.4063468090534854068789456061473383254572781109866794498925182862136132516464687927038400 +/- 4.30e-89]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  y = 2.7+2j; z = 1.3+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.elliptic_rf(x, y, z))))
    fpm:  -0.408712185367039
    mpm:  -0.40871218536703881609393723185641803795603835480787441566283244348371498408672933553185616 8
    dpm:  -0.40871218536703881609393723185641803795603835480787441566283244348371498408672933553185616 8
    gpm:  -0.40871218536703881609393723185641803795603835480787441566283244348371498408672933553185616 8
    apm: [-0.40871218536703881609393723185641803795603835480787441566283244348371498408672933553185625 62 +/- 7.42e-89]
cmath53:  -0.408712185367011
sflintc:  -0.4087122
dflintc:  -0.408712185367039
eflintc:  -0.4087121853670388161
qflintc:  -0.40871218536703881609393723185641 8
oflintc:  -0.40871218536703881609393723185641803795603835480787441566283244348371498
mflintc:  -0.40871218536703881609393723185641803795603835480787441566283244348371498408672933553185616 7
aflintc: [-0.40871218536703881609393723185641803795603835480787441566283244348371498408672933553185625 62 +/- 7.32e-89]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

8.1.2 Carlson completely symmetric elliptic integral of the second kind, $R_G(x, y, z)$

`ctx.elliptic_rg`(x, y, z)

where `ctx` is `math53` or `ctxflint`.

Returns the Carlson completely symmetric elliptic integral of the second kind, $R_G(x, y, z)$. See also Wikipedia [1293], NIST [172], BoostMath [136], Ehrhardt [295] (3.2.2.4), Flint [744], Mpmath [642].

$$R_G(x,y,z) = \frac{1}{4}\int_0^\infty \frac{t}{\sqrt{(t+x)(t+y)(t+z)}}\left(\frac{x}{t+x}+\frac{y}{t+y}+\frac{z}{t+z}\right)\mathrm{d}t.$$

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; y = 2.7; z = 1.3; gui.setdps(90)
>>> for ctx in gui.ctxlist_noipm_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.elliptic_rg(x, y, z)))
    fpm:  1.71771940872781
    mpm:  1.71771940872780544839820593594931907935890946673516328517839445821854284968464536517939035
    dpm:  1.71771940872780544839820593594931907935890946673516328517839445821854284968464536517939035
    gpm:  1.71771940872780544839820593594931907935890946673516328517839445821854284968464536517939035
    apm: ([1.71771940872780544839820593594931907935890946673516328517839445821854284968464536517939035 +/- 1.45e-90],␣
↪0)
 math53:  1.71771940872781
  sreal:  1.717719
  dreal:  1.71771940872781
  ereal:  1.7177194087278054484
  qreal:  1.71771940872780544839820593594932
  oreal:  1.71771940872780544839820593594931907935890946673516328517839445821854 28
  mreal:  1.71771940872780544839820593594931907935890946673516328517839445821854284968464536517939035
 sflint:  1.717719
 dflint:  1.71771940872781
 eflint:  1.7177194087278054484
 qflint:  1.71771940872780544839820593594932
```

(continues on next page)

(continued from previous page)

```
 oflint:  1.71771940872780544839820593594931907935890946673516328517839445821854284968464536517939035
 mflint:  1.71771940872780544839820593594931907935890946673516328517839445821854284968464536517939035
 aflint: [1.71771940872780544839820593594931907935890946673516328517839445821854284968464536517939035 +/- 2.29e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  y = 2.7+2j; z = 1.3+2j;  gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.elliptic_rg(x, y, z)))
    fpm:  (1.03495931235596, 1.15500266588851)
    mpm:  (1.0349593123559558211337752537516047231133931483193091046517807979765930370195848773815882199, 1.155002665888506178430005795902737975844)
cmath53:  (1.03495931235591, 1.1550026658885)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  y = 2.7+2j; z = 1.3+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.elliptic_rg(x, y, z))))
    fpm:  1.03495931235596
    mpm:  1.034959312355955821133775253751604723113393148319309104651780797976593037019584877381588 22
    dpm:  1.034959312355955821133775253751604723113393148319309104651780797976593037019584877381588 22
    gpm:  1.0349593123559558211337752537516047231133931483193091046517807979765930370195848773815882199
    apm: [1.034959312355955821133775253751604723113393148319309104651780797976593037019584877381588 +/- 3.77e-88]
cmath53:  1.03495931235591
sflintc:  1.034959
dflintc:  1.03495931235596
eflintc:  1.0349593123559558211
qflintc:  1.034959312355955821133775253751 6
oflintc:  1.034959312355955821133775253751604723113393148319309104651780797976593
mflintc:  1.034959312355955821133775253751604723113393148319309104651780797976593037019584877381588 22
aflintc: [1.034959312355955821133775253751604723113393148319309104651780797976593037019584877381588 +/- 3.73e-88]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  y = 2.7+2j; z = 1.3+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.elliptic_rg(x, y, z))))
    fpm:  1.15500266588851
    mpm:  1.155002665888506178430005795902737975843942028539576203357281215482077622731442498382164 2
    dpm:  1.155002665888506178430005795902737975843942028539576203357281215482077622731442498382164 2
    gpm:  1.155002665888506178430005795902737975843942028539576203357281215482077622731442498382164 2
    apm: [1.155002665888506178430005795902737975843942028539576203357281215482077622731442498382164 +/- 3.44e-88]
cmath53:  1.1550026658885
sflintc:  1.155003
dflintc:  1.15500266588851
eflintc:  1.1550026658885061784
qflintc:  1.155002665888506178430005795902 4
oflintc:  1.155002665888506178430005795902737975843942028539576203357281215482077622731442498382164
mflintc:  1.155002665888506178430005795902737975843942028539576203357281215482077622731442498382164 2
aflintc: [1.155002665888506178430005795902737975843942028539576203357281215482077622731442498382164 +/- 3.39e-88]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

8.1.3 Carlson symmetric elliptic integral of the third kind, $R_J(x, y, z, p)$

`ctx.elliptic_rj`(x, y, z, p)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns the Carlson symmetric elliptic integral of the third kind, $R_J(x, y, z, p)$, with $x, y, z \geq 0$, at most one may be zero and

$p \neq 0$. See also Wikipedia [1293], NIST [172], BoostMath [136], Ehrhardt [295] (3.2.2.5), Flint [744], Mpmath [643].

$$R_J(x,y,z,p) = \frac{3}{2}\int_0^\infty \frac{\mathrm{d}t}{(t+p)\sqrt{(t+x)(t+y)(t+z)}}.$$

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; y = 2.7; z = 1.3; p = 6.4; gui.setdps(90)
>>> for ctx in gui.ctxlist_noipm_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.elliptic_rj(x, y, z, p)))
    fpm:  0.127423787191668
    mpm:  0.127423787191668222903646534510955430327295706344281528842778153775872583638180051189580668
    dpm:  0.127423787191668222903646534510955430327295706344281528842778153775872583638180051189580668
    gpm:  0.127423787191668222903646534510955430327295706344281528842778153775872583638180051189580668
    apm: ([0.127423787191668222903646534510955430327295706344281528842778153775872583638180051189580668 +/- 4.66e-91],␣
↪0)
 math53:  0.127423787191668
  sreal:  0.1274238
  dreal:  0.127423787191668
  ereal:  0.12742378719166822289
  qreal:  0.127423787191668222903646534510955
  oreal:  0.127423787191668222903646534510955430327295706344281528842778153775872583638180051189580668
  mreal:  0.127423787191668222903646534510955430327295706344281528842778153775872583638180051189580668
 sflint:  0.1274238
 dflint:  0.127423787191668
 eflint:  0.12742378719166822291
 qflint:  0.127423787191668222903646534510955
 oflint:  0.127423787191668222903646534510955430327295706344281528842778153775872583638180051189580668
 mflint:  0.127423787191668222903646534510955430327295706344281528842778153775872583638180051189580668
 aflint: [0.127423787191668222903646534510955430327295706344281528842778153775872583638180051189580668 +/- 5.86e-91]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = 5.1+2j;  y = 2.7+2j; z = 1.3+2j; p = 6.4+2j;  gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.elliptic_rj(x, y, z, p)))
    fpm:  (0.0744060403350267, -0.0675655379365139)
    mpm:  (0.074406040335026743394173046549655565875533, -0.067565537936513869675463306197940242983 78)
cmath53:  (0.0744060390508556, -0.0675655361339475)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = 5.1+2j;  y = 2.7+2j; z = 1.3+2j; p = 6.4+2j;  gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.elliptic_rj(x, y, z, p))))
    fpm:  0.0744060403350267
    mpm:  0.074406040335026743394173046549655568755335291801676614192491056992429700256953350612459836 3
    dpm:  0.074406040335026743394173046549655568755335291801676614192491056992429700256953350612459836 3
    gpm:  0.074406040335026743394173046549655568755335291801676614192491056992429700256953350612459836297
    apm: [0.074406040335026743394173046549655568755335291801676614192491056992429700256953350612459836 3 +/- 5.70e-92]
cmath53:  0.0744060390508556
sflintc:  0.07440604
dflintc:  0.0744060403350267
eflintc:  0.07440604033502674339 2
qflintc:  0.074406040335026743394173046549655 6
oflintc:  0.074406040335026743394173046549655568755335291801676614192491056992429 7
mflintc:  0.074406040335026743394173046549655568755335291801676614192491056992429700256953350612459836 2
aflintc: [0.074406040335026743394173046549655568755335291801676614192491056992429700256953350612459836 +/- 3.34e-91]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x =5.1+2j;  y = 2.7+2j; z = 1.3+2j; p = 6.4+2j;  gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
```

(continues on next page)

(continued from previous page)

```
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.elliptic_rj(x, y, z, p))))
    fpm:  -0.0675655379365139
    mpm:  -0.0675655379365138696754633061979402429837776734682841357675547380010944271350023323418584808
    dpm:  -0.0675655379365138696754633061979402429837776734682841357675547380010944271350023323418584808
    gpm:  -0.0675655379365138696754633061979402429837776734682841357675547380010944271350023323418584808
    apm: [-0.0675655379365138696754633061979402429837776734682841357675547380010944271350023323418584808 +/- 6.18e-92]
cmath53:  -0.0675655361339475
sflintc:  -0.06756554
dflintc:  -0.0675655379365139
eflintc:  -0.06756553793651386967
qflintc:  -0.0675655379365138696754633061979402
oflintc:  -0.067565537936513869675463306197940242983777673468284135767554738001094427
mflintc:  -0.0675655379365138696754633061979402429837776734682841357675547380010944271350023323418584808
aflintc: [-0.0675655379365138696754633061979402429837776734682841357675547380010944271350023323418584481 +/- 3.10e-91]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

8.1.4 Carlson symmetric elliptic integral of the second kind, $R_D(x, y, z)$

`ctx.elliptic_rd`(x, y, z)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns the Carlson symmetric elliptic integral of the second kind, $R_D(x, y, z) = R_J(x, y, z, z)$, with $z > 0, x, y \geq 0$, at most one of x, y may be zero. See also Wikipedia [1293], NIST [172], BoostMath [136], Ehrhardt [295] (3.2.2.3), Flint [744], Mpmath [640].

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; y = 2.7; z = 1.3; gui.setdps(90)
>>> for ctx in gui.ctxlist_noipm_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.elliptic_rd(x, y, z)))
    fpm:  0.599561454504973
    mpm:  0.599561454504973434494591386846386915431885761091803970274713411012626891545887635046174068
    dpm:  0.599561454504973434494591386846386915431885761091803970274713411012626891545887635046174068
    gpm:  0.599561454504973434494591386846386915431885761091803970274713411012626891545887635046174068
    apm: ([0.599561454504973434494591386846386915431885761091803970274713411012626891545887635046174068 +/- 3.59e-91],␣
↪0)
 math53:  0.599561454504973
  sreal:  0.5995615
  dreal:  0.599561454504973
  ereal:  0.59956145450497343446
  qreal:  0.599561454504973434494591386846387
  oreal:  0.599561454504973434494591386846386915431885761091803970274713411012626891
  mreal:  0.599561454504973434494591386846386915431885761091803970274713411012626891545887635046174068
 sflint:  0.5995615
 dflint:  0.599561454504973
 eflint:  0.59956145450497343451
 qflint:  0.599561454504973434494591386846387
 oflint:  0.599561454504973434494591386846386915431885761091803970274713411012626891
 mflint:  0.599561454504973434494591386846386915431885761091803970274713411012626891545887635046174068
 aflint: [0.599561454504973434494591386846386915431885761091803970274713411012626891545887635046174407 +/- 2.98e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  y = 2.7+2j; z = 1.3+2j;  gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.elliptic_rd(x, y, z)))
    fpm:  (-0.0897631544562476, -0.189488727804841)
    mpm:  (-0.089763154456247652014546166602324003550 89, -0.189488727804841059059018905590241950977 9)
cmath53:  (-0.0897631544562477, -0.189488727804841)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  y = 2.7+2j; z = 1.3+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.elliptic_rd(x, y, z))))
    fpm:  -0.0897631544562476
    mpm:  -0.089763154456247652014546166602324003550886576754896175384170917417022649943259134655698644303
    dpm:  -0.089763154456247652014546166602324003550886576754896175384170917417022649943259134655698644303
    gpm:  -0.089763154456247652014546166602324003550886576754896175384170917417022649943259134655698644303
    apm: [-0.089763154456247652014546166602324003550886576754896175384170917417022649943259134655698644 +/- 4.23e-91]
cmath53:  -0.0897631544562477
sflintc:  -0.08976316
dflintc:  -0.0897631544562476
eflintc:  -0.089763154456247652019
qflintc:  -0.089763154456247652014546166602324
oflintc:  -0.089763154456247652014546166602324003550886576754896175384170917417022649
mflintc:  -0.089763154456247652014546166602324003550886576754896175384170917417022649943259134655698644303
aflintc: [-0.089763154456247652014546166602324003550886576754896175384170917417022649943259134655698644 +/- 4.75e-91]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  y = 2.7+2j; z = 1.3+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.elliptic_rd(x, y, z))))
    fpm:  -0.189488727804841
    mpm:  -0.189488727804841059059018905590241950977941195215932987790330699278670562283113704184277324
    dpm:  -0.189488727804841059059018905590241950977941195215932987790330699278670562283113704184277324
    gpm:  -0.189488727804841059059018905590241950977941195215932987790330699278670562283113704184277324
    apm: [-0.189488727804841059059018905590241950977941195215932987790330699278670562283113704184277324 +/- 3.47e-91]
cmath53:  -0.189488727804841
sflintc:  -0.1894887
dflintc:  -0.189488727804841
eflintc:  -0.18948872780484105906
qflintc:  -0.189488727804841059059018905590242
oflintc:  -0.189488727804841059059018905590241950977941195215932987790330699278670562283113704184277324
mflintc:  -0.189488727804841059059018905590241950977941195215932987790330699278670562283113704184277324
aflintc: [-0.189488727804841059059018905590241950977941195215932987790330699278670562283113704184277324 +/- 3.53e-91]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

8.1.5 Carlson degenerate symmetric elliptic integral of the first kind, $R_C(x, y)$

`ctx.elliptic_rc`(x, y)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns the Carlson degenerate symmetric elliptic integral of the first kind, $R_C(x, y) = R_F(x, y, y)$, for $x \geq 0, y \neq 0$. See also Wikipedia [1293], NIST [172], BoostMath [136], Ehrhardt [295] (3.2.2.1), Flint [744], Mpmath [639].

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; y = 2.7; gui.setdps(90)
>>> for ctx in gui.ctxlist_noipm_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.elliptic_rc(x, y)))
    fpm:  0.542443519049021
    mpm:  0.542443519049021108409527120866871792671754914444348783296968413054823744075195913976739639
    dpm:  0.542443519049021108409527120866871792671754914444348783296968413054823744075195913976739639
    gpm:  0.542443519049021108409527120866871792671754914444348783296968413054823744075195913976739639
    apm: ([0.542443519049021108409527120866871792671754914444348783296968413054823744075195913976739639 +/- 2.17e-91],␣
↪0)
 math53:  0.542443519049021
  sreal:  0.5424435
  dreal:  0.542443519049021
  ereal:  0.54244351904902110843
```

(continues on next page)

(continued from previous page)

```
  qreal:  0.54244351904902110840952712086687179267175491444434878329696841305482375
  oreal:  0.54244351904902110840952712086687179267175491444434878329696841305482375
  mreal:  0.54244351904902110840952712086687179267175491444434878329696841305482374407519591397673963 9
 sflint:  0.5424435
 dflint:  0.5424435190490211
 eflint:  0.5424435190490211084 3
 qflint:  0.54244351904902110840952712086687179267175491444434878329696841305482375
 oflint:  0.54244351904902110840952712086687179267175491444434878329696841305482375
 mflint:  0.54244351904902110840952712086687179267175491444434878329696841305482374407519591397673963 9
 aflint: [0.54244351904902110840952712086687179267175491444434878329696841305482374407519591397673963 9 +/- 8.57e-91]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  y = 2.7+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.elliptic_rc(x, y)))
    fpm:  (0.417798027687995, -0.367169982876417)
    mpm:  (0.41779802768799452554183769720766278362950081472897309142283221478166957621293091507348991 8, -0.36716998287641672348339828424318267249817775684031840499404588672111072154931777740232166 02)
cmath53:  (0.417798027687965, -0.367169982876391)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  y = 2.7+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.elliptic_rc(x, y)))
    fpm:  0.417798027687995
    mpm:  0.41779802768799452554183769720766278362950081472897309142283221478166957621293091507348991 8
    dpm:  0.41779802768799452554183769720766278362950081472897309142283221478166957621293091507348991 8
    gpm:  0.41779802768799452554183769720766278362950081472897309142283221478166957621293091507348991 8
    apm: [0.41779802768799452554183769720766278362950081472897309142283221478166957621293091507348991 +/- 5.41e-89]
cmath53:  0.417798027687965
sflintc:  0.417798
dflintc:  0.417798027687995
eflintc:  0.41779802768799452554
qflintc:  0.417798027687994525541837697207663
oflintc:  0.41779802768799452554183769720766278362950081472897309142283221478166958
mflintc:  0.41779802768799452554183769720766278362950081472897309142283221478166957621293091507348991 8
aflintc: [0.41779802768799452554183769720766278362950081472897309142283221478166957621293091507348991 +/- 4.72e-89]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  y = 2.7+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.elliptic_rc(x, y)))
    fpm:  -0.367169982876417
    mpm:  -0.36716998287641672348339828424318267249817775684031840499404588672111071549317777402321622 6
    dpm:  -0.36716998287641672348339828424318267249817775684031840499404588672111071549317777402321622 6
    gpm:  -0.36716998287641672348339828424318267249817775684031840499404588672111071549317777402321622602
    apm: [-0.36716998287641672348339828424318267249817775684031840499404588672111071549317777402321622 +/- 5.04e-89]
cmath53:  -0.367169982876391
sflintc:  -0.36717
dflintc:  -0.367169982876417
eflintc:  -0.36716998287641672348
qflintc:  -0.367169982876416723483398284243183
oflintc:  -0.3671699828764167234833982842431826724981777568403184049940458867211107
mflintc:  -0.36716998287641672348339828424318267249817775684031840499404588672111071549317777402321622 6
aflintc: [-0.36716998287641672348339828424318267249817775684031840499404588672111071549317777402321622 +/- 4.58e-89]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

8.2 Legendre elliptic integrals (elliptic parameter m)

While the Legendre/Bulirsch/Maple style functions have the modulus k (or k', k_c) as an argument, the Mathematica style functions (prefixed with `M`) use the parameter ($m = k^2$) and therefore cover the imaginary modulus functions with $m < 0$.

8.2.1 Legendre complete elliptic integral of the first kind, $K(m)$

`ctx.`**`m_elliptic_k`**`(`m`)`

where `ctx` is `math53` or `ctxflint`.

Returns the complete elliptic integral of the first kind, $\mathrm{M_EllipticK}(m) = \int_0^{\pi/2} \frac{\mathrm{d}t}{\sqrt{1 - m\sin^2(t)}}$, with parameter $m \neq 1$.

See also Wikipedia [1295], MathWorld [947], NIST [171], BoostMath [137], Ehrhardt [295] (3.2.5.1), Flint [745].

An example with real input:

```
>>> from xlcalcnet import *
>>> m = -5.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.m_elliptic_k(m)))
    fpm:  0.950714187079869
    mpm:  0.950714187079868563186782597025369087762678867942372170663135075106214263306060180818124363
    dpm:  0.950714187079868563186782597025369087762678867942372170663135075106214263306060180818124363
    gpm:  0.950714187079868563186782597025369087762678867942372170663135075106214263306060180818124363303
    apm: [0.950714187079868563186782597025369087762678867942372170663135075106214263306060180818124436 +/- 4.26e-90]
 math53:  0.950714187079869
 sflint:  0.9507142
 dflint:  0.950714187079869
 eflint:  0.95071418707986856317
 qflint:  0.950714187079868563186782597025369
 oflint:  0.950714187079868563186782597025369087762678867942372170663135075106214263306060180818124426
 mflint:  0.950714187079868563186782597025369087762678867942372170663135075106214263306060180818124365
 aflint: [0.950714187079868563186782597025369087762678867942372170663135075106214263306060180818124436 +/- 9.16e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> m = -5.1+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.m_elliptic_k(m)))
    fpm:  (0.932926541517737, 0.090648574571162)
    mpm:  (0.9329265415177372729218770094272884911842, 0.0906485745711619710022315183227723830194 8)
cmath53:  (0.932926541517737, 0.090648574571162)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> m = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.m_elliptic_k(m))))
    fpm:  0.932926541517737
    mpm:  0.93292654151773727292187700942728849118420063862749112947633201045839937453843782082966605 4
    dpm:  0.93292654151773727292187700942728849118420063862749112947633201045839937453843782082966605 4
    gpm:  0.93292654151773727292187700942728849118420063862749112947633201045839937453843782082966605398
    apm: [0.93292654151773727292187700942728849118420063862749112947633201045839937453843782082966605 +/- 5.67e-90]
cmath53:  0.932926541517737
sflintc:  0.9329265
dflintc:  0.932926541517737
eflintc:  0.93292654151773727293
qflintc:  0.932926541517737272921877009427288
oflintc:  0.93292654151773727292187700942728849118420063862749112947633201045839938
mflintc:  0.93292654151773727292187700942728849118420063862749112947633201045839937453843782082966056
aflintc: [0.93292654151773727292187700942728849118420063862749112947633201045839937453843782082966661 +/- 5.14e-89]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> m = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.m_elliptic_k(m))))
    fpm:  0.090648574571162
    mpm:  0.090648574571161971002231518322772383019477682831996277150636455863747441668783270428025836 5
    dpm:  0.090648574571161971002231518322772383019477682831996277150636455863747441668783270428025836 5
    gpm:  0.090648574571161971002231518322772383019477682831996277150636455863747441668783270428025836503
    apm: [0.090648574571161971002231518322772383019477682831996277150636455863747441668783270428025836 +/- 9.67e-91]
cmath53:  0.090648574571162
sflintc:  0.09064858
dflintc:  0.090648574571162
eflintc:  0.090648574571161971002
qflintc:  0.090648574571161971002231518322772
oflintc:  0.090648574571161971002231518322772383019477682831996277150636455863747442
mflintc:  0.090648574571161971002231518322772383019477682831996277150636455863747441668783270428025836
aflintc: [0.090648574571161971002231518322772383019477682831996277150636455863747441668783270428025840 +/- 5.59e-90]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

8.2.2 Legendre complete elliptic integral of the second kind, $E(m)$

`ctx.m_elliptic_e`(m)

where `ctx` is `math53` or `ctxflint`.

Returns the complete elliptic integral of the second kind, $\mathrm{M_EllipticEC}(m) = \int_0^{\pi/2} \sqrt{1 - m\sin^2(t)}\,\mathrm{d}t$, with parameter $m \neq 1$.

See also Wikipedia [1296], MathWorld [948], NIST [171], BoostMath [138], Ehrhardt [295] (3.2.5.2), Flint [745].

An example with real input:

```
>>> from xlcalcnet import *
>>> m = -5.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.m_elliptic_e(m)))
    fpm:  2.84887617240518
    mpm:  2.84887617240518322935493041196157248867455562967969331765255513355273322152237995674854 1
    dpm:  2.84887617240518322935493041196157248867455562967969331765255513355273322152237995674854 1
    gpm:  2.84887617240518322935493041196157248867455562967969331765255513355273322152237995674854 1002
    apm: [2.84887617240518322935493041196157248867455562967969331765255513355273322152237995674854 1 +/- 4.97e-89]
 math53:  2.84887617240518
 sflint:  2.848876
 dflint:  2.84887617240518
 eflint:  2.848876172405183229 4
 qflint:  2.848876172405183229 35493041196157
 oflint:  2.848876172405183229 3549304119615724886745556296796933176525551335527332
 mflint:  2.848876172405183229 354930411961572488674555629679693317652555133552733221522379956748547 9
 aflint: [2.848876172405183229 3549304119615724886745556296796933176525551335527332215223799567485 47 +/- 2.43e-88]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> m = -5.1+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.m_elliptic_e(m)))
    fpm:  (2.87531976422923, -0.368250870477359)
    mpm:  (2.875319764229230843159805851338373303672, -0.368250870477358795930308825620495049 1917)
cmath53:  (2.87531976422909, -0.368250870477372)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> m = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.m_elliptic_e(m))))
    fpm:  2.87531976422923
    mpm:  2.875319764229230843159805851338373303672356400898486345828750669090811669000491656084160 53
    dpm:  2.875319764229230843159805851338373303672356400898486345828750669090811669000491656084160 53
    gpm:  2.875319764229230843159805851338373303672356400898486345828750669090811669000491656084160 53
    apm: [2.875319764229230843159805851338373303672356400898486345828750669090811669000491656084161 +/- 5.87e-88]
cmath53:  2.87531976422909
sflintc:  2.87532
dflintc:  2.87531976422923
eflintc:  2.8753197642292308432
qflintc:  2.875319764229230843159805851338 37
oflintc:  2.875319764229230843159805851338373303672356400898486345828750669090811 7
mflintc:  2.875319764229230843159805851338373303672356400898486345828750669090811669000491656084160 52
aflintc: [2.875319764229230843159805851338373303672356400898486345828750669090811669000491656084161 +/- 8.39e-88]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> m = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.m_elliptic_e(m))))
    fpm:  -0.368250870477359
    mpm:  -0.368250870477358795930308825620495049191659418883867234130477851430199988279551665744024943
    dpm:  -0.368250870477358795930308825620495049191659418883867234130477851430199988279551665744024943
    gpm:  -0.368250870477358795930308825620495049191659418883867234130477851430199988279551665744024943
    apm: [-0.368250870477358795930308825620495049191659418883867234130477851430199988279551665744025 +/- 1.65e-88]
cmath53:  -0.368250870477372
sflintc:  -0.3682509
dflintc:  -0.368250870477359
eflintc:  -0.36825087047735879594
qflintc:  -0.368250870477358795930308825620495
oflintc:  -0.368250870477358795930308825620495049191659418883867234130477851430199999
mflintc:  -0.368250870477358795930308825620495049191659418883867234130477851430199988279551665744024942
aflintc: [-0.368250870477358795930308825620495049191659418883867234130477851430199988279551665744025 +/- 4.03e-88]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

8.2.3 Legendre complete elliptic integral of the third kind, $\Pi(n, m)$

`ctx.m_elliptic_pi`(n, m)

where `ctx` is `math53` or `ctxflint`.

Returns the complete elliptic integral of the third kind , $\mathrm{M_EllipticPiC}(n, m) = \int_0^{\pi/2} \frac{\mathrm{d}t}{(1 - n\sin^2(t))\sqrt{1 - m\sin^2(t)}}$, with characteristic $n \neq 1$ and parameter $m \neq 1$.

See also Wikipedia [1297], MathWorld [949], NIST [171], BoostMath [139], Ehrhardt [295] (3.2.5.3), Flint [749].

An example with real input:

```
>>> from xlcalcnet import *
>>> n = 0.75; m = 0.5; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.m_elliptic_pi(n, m)))
    fpm:  3.93061484589535
    mpm:  3.930614845895350913875751766062302351104104227640214391095864060827476812634312692004555237
    dpm:  3.930614845895350913875751766062302351104104227640214391095864060827476812634312692004555237
    gpm:  3.930614845895350913875751766062302351104104227640214391095864060827476812634312692004523698
    apm: [3.930614845895350913875751766062302351104104227640214391095864060827476812634312692004555237 +/- 2.87e-90]
 math53:  3.93061484589535
```

(continues on next page)

(continued from previous page)

```
 sflint:  3.930615
 dflint:  3.93061484589535
 eflint:  3.9306148458953509138
 qflint:  3.930614845895350913875751766062302351104104227640214391095864060827476812634312692004552 37
 oflint:  3.930614845895350913875751766062302351104104227640214391095864060827476812634312692004552 37
 mflint:  3.930614845895350913875751766062302351104104227640214391095864060827476812634312692004552 37
 aflint: [3.930614845895350913875751766062302351104104227640214391095864060827476812634312692004552 37 +/- 6.07e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> n = 0.75+2j;  m = 0.5+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.m_elliptic_pi(n, m)))
    fpm:  (0.499097246595171, 0.705231094798092)
    mpm:  (0.4990972465951706312298307615445249766389, 0.7052310947980915876902594934850785039421)
cmath53:  (0.499097250800956, 0.705231090070493)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> n = 0.75+2j;  m = 0.5+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.m_elliptic_pi(n, m))))
    fpm:  0.499097246595171
    mpm:  0.4990972465951706312298307615445249766389128204533047052747099141447909769193647138670373 08
    dpm:  0.4990972465951706312298307615445249766389128204533047052747099141447909769193647138670373 08
    gpm:  0.4990972465951706312298307615445249766389128204533047052747099141447909769193647138670373 08
    apm: [0.4990972465951706312298307615445249766389128204533047052747099141447909769193647138670373 1 +/- 2.34e-90]
cmath53:  0.499097250800956
sflintc:  0.4990973
dflintc:  0.499097246595171
eflintc:  0.4990972465951706312 3
qflintc:  0.4990972465951706312298307615445 25
oflintc:  0.4990972465951706312298307615445249766389128204533047052747099141447909 8
mflintc:  0.4990972465951706312298307615445249766389128204533047052747099141447909769193647138670373 09
aflintc: [0.4990972465951706312298307615445249766389128204533047052747099141447909769193647138670373 1 +/- 4.07e-90]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> n = 0.75+2j;  m = 0.5+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.m_elliptic_pi(n, m))))
    fpm:  0.705231094798092
    mpm:  0.7052310947980915876902594934850785039421170668585109030464134400501836640208097309970468 59
    dpm:  0.7052310947980915876902594934850785039421170668585109030464134400501836640208097309970468 59
    gpm:  0.7052310947980915876902594934850785039421170668585109030464134400501836640208097309970468 5902
    apm: [0.7052310947980915876902594934850785039421170668585109030464134400501836640208097309970468 59 +/- 6.50e-91]
cmath53:  0.705231090070493
sflintc:  0.7052311
dflintc:  0.705231094798092
eflintc:  0.7052310947980915877
qflintc:  0.7052310947980915876902594934850 78
oflintc:  0.7052310947980915876902594934850785039421170668585109030464134400501836 6
mflintc:  0.7052310947980915876902594934850785039421170668585109030464134400501836640208097309970468 58
aflintc: [0.7052310947980915876902594934850785039421170668585109030464134400501836640208097309970468 6 +/- 3.41e-90]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

8.2.4 Legendre incomplete elliptic integral of the first kind, $F(\phi, m)$

`ctx.m_elliptic_f(phi, m)`

where `ctx` is `math53` or `ctxflint`.

Returns the complete elliptic integral of the first kind, $\mathrm{M_EllipticF}(\phi, m) = \int_0^{\phi} \frac{\mathrm{d}t}{\sqrt{1 - m\sin^2(t)}}$, with parameter $m\sin^2(\phi) \leq 1$.

See also Wikipedia [1302], MathWorld [955], NIST [171], BoostMath [137], Ehrhardt [295] (3.2.5.4).

An example with real input:

```
>>> from xlcalcnet import *
>>> phi = 0.75; m = 0.5; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.m_elliptic_f(phi, m)))
    fpm:  0.785381841639308
    mpm:  0.785381841639308415040695231202441817572888604673497268030236048704844121866911955427766389
    dpm:  0.785381841639308415040695231202441817572888604673497268030236048704844121866911955427766389
    gpm:  0.785381841639308415040695231202441817572888604673497268030236048704844121866911955427766389
    apm: [0.785381841639308415040695231202441817572888604673497268030236048704844121866911955427766389 +/- 8.67e-91]
 math53:  0.785381841639308
 sflint:  0.7853819
 dflint:  0.785381841639308
 eflint:  0.7853818416393084150 5
 qflint:  0.785381841639308415040695231202442
 oflint:  0.785381841639308415040695231202441817572888604673497268030236048704844121
 mflint:  0.785381841639308415040695231202441817572888604673497268030236048704844121866911955427766388
 aflint: [0.785381841639308415040695231202441817572888604673497268030236048704844121866911955427766389 +/- 3.65e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> phi = 0.75+2j;  m = 0.5+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.m_elliptic_f(phi, m)))
    fpm:  (0.490302892126893, 1.06285354403954)
    mpm:  (0.490302892126892920470676991401367624274322695618689794953856273356996553395086525496410131)
cmath53:  (0.490302892126848, 1.06285354403944)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> phi = 0.75+2j;  m = 0.5+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.m_elliptic_f(phi, m))))
    fpm:  0.490302892126893
    mpm:  0.490302892126892920470676991401367624274322695618689794953856273356996553395086525496410131
    dpm:  0.490302892126892920470676991401367624274322695618689794953856273356996553395086525496410131
    gpm:  0.490302892126892920470676991401367624274322695618689794953856273356996553395086525496410131
    apm: [0.490302892126892920470676991401367624274322695618689794953856273356996553395086525496410 +/- 2.94e-88]
cmath53:  0.490302892126848
sflintc:  0.4903029
dflintc:  0.490302892126893
eflintc:  0.4903028921268929204 7
qflintc:  0.490302892126892920470676991401368
oflintc:  0.490302892126892920470676991401367624274322695618689794953856273356996 5
mflintc:  0.490302892126892920470676991401367624274322695618689794953856273356996553395086525496410131
aflintc: [0.490302892126892920470676991401367624274322695618689794953856273356996553395086525496410 +/- 5.43e-88]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> phi = 0.75+2j;  m = 0.5+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
```

(continues on next page)

(continued from previous page)

```
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.m_elliptic_f(phi, m))))
    fpm:  1.06285354403954
    mpm:  1.062853544039536018224634256323298294282397835678154845953392045663874546684489056360040 14
    dpm:  1.062853544039536018224634256323298294282397835678154845953392045663874546684489056360040 14
    gpm:  1.062853544039536018224634256323298294282397835678154845953392045663874546684489056360040 14
    apm: [1.062853544039536018224634256323298294282397835678154845953392045663874546684489056360040 +/- 3.08e-88]
cmath53:  1.06285354403944
sflintc:  1.062854
dflintc:  1.06285354403954
eflintc:  1.0628535440395360182
qflintc:  1.062853544039536018224634256323 3
oflintc:  1.062853544039536018224634256323298294282397835678154845953392045663874 5
mflintc:  1.062853544039536018224634256323298294282397835678154845953392045663874546684489056360040 14
aflintc: [1.062853544039536018224634256323298294282397835678154845953392045663874546684489056360040 +/- 5.60e-88]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

8.2.5 Legendre incomplete elliptic integral of the second kind, $E(\phi, m)$

`ctx.m_elliptic_e_inc`(*phi*, *m*)

where `ctx` is `math53` or `ctxflint`.

Returns the complete elliptic integral of the second kind, $\mathrm{M_EllipticE}(\phi, m) = \int_0^{\phi} \sqrt{1 - m\sin^2(t)}\,\mathrm{d}t$ with parameter $m\sin^2(\phi) \leq 1$.

See also Wikipedia [1303], MathWorld [956], NIST [171], BoostMath [138], Ehrhardt [295] (3.2.5.5), Flint [749].

An example with real input:

```
>>> from xlcalcnet import *
>>> phi = 0.75; m = 0.5; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.m_elliptic_e_inc(phi, m)))
    fpm:  0.717350716077167
    mpm:  0.71735071607716661660415925895161024135676176011831398146809865211586835399717140440530368 2
    dpm:  0.71735071607716661660415925895161024135676176011831398146809865211586835399717140440530368 2
    gpm:  0.71735071607716661660415925895161024135676176011831398146809865211586835399717140440530368 2
    apm: [0.71735071607716661660415925895161024135676176011831398146809865211586835399717140440530368 +/- 7.81e-91]
 math53:  0.717350716077167
 sflint:  0.7173507
 dflint:  0.717350716077167
 eflint:  0.71735071607716661659
 qflint:  0.717350716077166616604159258951610 1
 oflint:  0.71735071607716661660415925895161024135676176011831398146809865211586835
 mflint:  0.71735071607716661660415925895161024135676176011831398146809865211586835399717140440530368 1
 aflint: [0.71735071607716661660415925895161024135676176011831398146809865211586835399717140440530368 +/- 3.92e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> pphi = 0.75+2j;  m = 0.5+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.m_elliptic_e_inc(phi, m)))
    fpm:  (1.5837638485753, 4.83404671559569)
    mpm:  (1.583763848575302697875448499717636585461, 4.834046715595690036838024223269293844158)
cmath53:  (1.58376384857526, 4.83404671559559)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> phi = 0.75+2j;  m = 0.5+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
```

(continues on next page)

(continued from previous page)

```
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.m_elliptic_e_inc(phi, m))))
    fpm:  1.5837638485753
    mpm:  1.583763848575302697875448499717636585461132161475779600518520031318842505534771541260967 2
    dpm:  1.583763848575302697875448499717636585461132161475779600518520031318842505534771541260967 2
    gpm:  1.583763848575302697875448499717636585461132161475779600518520031318842505534771541260967 2001
    apm: [1.583763848575302697875448499717636585461132161475779600518520031318842505534771541260967 +/- 3.98e-88]
cmath53:  1.58376384857526
sflintc:  1.583764
dflintc:  1.5837638485753
eflintc:  1.5837638485753026979
qflintc:  1.583763848575302697875448499717 64
oflintc:  1.583763848575302697875448499717636585461132161475779600518520031318842 5
mflintc:  1.583763848575302697875448499717636585461132161475779600518520031318842505534771541260967 9
aflintc: [1.583763848575302697875448499717636585461132161475779600518520031318842505534771541260967 +/- 7.61e-88]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> phi = 0.75+2j;  m = 0.5+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.m_elliptic_e_inc(phi, m))))
    fpm:  4.83404671559569
    mpm:  4.834046715595690036838024223269293844157871500506208584221087490594804814293390052570763 5
    dpm:  4.834046715595690036838024223269293844157871500506208584221087490594804814293390052570763 5
    gpm:  4.834046715595690036838024223269293844157871500506208584221087490594804814293390052570763 3501
    apm: [4.834046715595690036838024223269293844157871500506208584221087490594804814293390052570763 +/- 5.55e-88]
cmath53:  4.83404671559559
sflintc:  4.834047
dflintc:  4.83404671559569
eflintc:  4.8340467155956900369
qflintc:  4.834046715595690036838024223269 9
oflintc:  4.834046715595690036838024223269293844157871500506208584221087490594804 8
mflintc:  4.834046715595690036838024223269293844157871500506208584221087490594804814293390052570763 4
aflintc: [4.834046715595690036838024223269293844157871500506208584221087490594804814293390052570763 +/- 9.16e-88]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

8.2.6 Legendre incomplete elliptic integral of the third kind, $\Pi(n, \phi, m)$

`ctx.m_elliptic_pi_inc`(*n*, *phi*, *m*)

where `ctx` is `math53` or `ctxflint`.

Returns the complete elliptic integral of the third kind, $\mathrm{M_EllipticPi}(n, \phi, m) = \int_0^{\phi} \frac{\mathrm{d}t}{(1 - n\sin^2(t))\sqrt{1 - m\sin^2(t)}}$ with characteristic $n \neq 1$ and parameter $m \neq 1$.

See also Wikipedia [1304], MathWorld [957], NIST [171], BoostMath [139], Ehrhardt [295] (3.2.5.6), Flint [749].

An example with real input:

```
>>> from xlcalcnet import *
>>> n = 0.55; phi = 0.18; m = 0.01; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.m_elliptic_pi_inc(n, phi, m)))
    fpm:  0.181083455890139
    mpm:  0.181083455890138513633275582788480096112068322266693551936587308982343650240414976133341201401 4
    dpm:  0.181083455890138513633275582788480096112068322266693551936587308982343650240414976133341201401 4
    gpm:  0.181083455890138513633275582788480096112068322266693551936587308982343650240414976133341201401
    apm: [0.181083455890138513633275582788480096112068322266693551936587308982343650240414976133341201401 +/- 2.47e-91]
 math53:  0.181083455890138
 sflint:  0.1810835
 dflint:  0.181083455890139
```

(continues on next page)

(continued from previous page)

```
 eflint:  0.18108345589013851634
 qflint:  0.181083455890138516332755827884801
 oflint:  0.1810834558901385163327558278848009611206832226669355193658730898234365
 mflint:  0.18108345589013851633275582788480096112068322266693551936587308982343650240414976133341 2014
 aflint: [0.18108345589013851633275582788480096112068322266693551936587308982343650240414976133341 2014 +/- 8.12e-91]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> n = -5.1+2j;  phi = 2.7+2j; m = 1.3+2j;  gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.m_elliptic_pi_inc(n, phi, m)))
    fpm:  (0.322004007340083, 0.751422520797896)
    mpm:  (0.3220040073400829546054227879987298519782, 0.751422520797895434234488793898576841608 5)
cmath53:  (0.322004003941805, 0.751422522223148)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> n = -5.1+2j;  phi = 2.7+2j; m = 1.3+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.m_elliptic_pi_inc(n, phi, m))))
    fpm:  0.322004007340083
    mpm:  0.322004007340082954605422787998728249731886004300657524161176238451434722979010479580052089
    dpm:  0.322004007340082954605422787998728249731886004300657524161176238451434722979010479580052089
    gpm:  0.322004007340082954605422787998728249731886004300657524161176238451434722979010479580052089 02
    apm: [0.322004007340082954605422787998728249731886004300657524160758008006523921340316754762 95 +/- 6.81e-87]
cmath53:  0.322004003941805
sflintc:  0.322004
dflintc:  0.322004007340083
eflintc:  0.3220040073400829546
qflintc:  0.322004007340082954605422787998728
oflintc:  0.322004007340082954605422787998728249731886004300657524160758008006523921
mflintc:  0.322004007340082954605422787998728249731886004300657524160758008006523921340316754762945202
aflintc: [0.322004007340082954605422787998728249731886004300657524160758008006523921340316754762 9 +/- 5.07e-86]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> n = -5.1+2j;  phi = 2.7+2j; m = 1.3+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.m_elliptic_pi_inc(n, phi, m))))
    fpm:  0.751422520797896
    mpm:  0.751422520797895434234488793898574144443223395508373219552455925979035549446564959995815034
    dpm:  0.751422520797895434234488793898574144443223395508373219552455925979035549446564959995815034
    gpm:  0.751422520797895434234488793898574144443223395508373219552455925979035549446564959995815034 02
    apm: [0.751422520797895434234488793898574144443223395508373219551751891507172153605474800586 03 +/- 6.12e-87]
cmath53:  0.751422522223148
sflintc:  0.7514225
dflintc:  0.751422520797896
eflintc:  0.7514225207978954342
qflintc:  0.751422520797895434234488793898574
oflintc:  0.751422520797895434234488793898574144443223395508373219551751891507172153605474
mflintc:  0.751422520797895434234488793898574144443223395508373219551751891507172153605474800586026195
aflintc: [0.751422520797895434234488793898574144443223395508373219551751891507172153605474800586 0 +/- 3.25e-86]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

8.3 Legendre elliptic integrals (elliptic modulus k), and related functions

For an overview see NIST [171], BoostMath [135], Mpmath [645].

8.3.1 Legendre complete elliptic integral of the first kind, $K(k)$

`ctx.elliptic_k(k)`

where `ctx` is `math53`, `mathc53`, `ctxboost` or `ctxflint`.

Returns the Legendre complete elliptic integral of the first kind, $K(k) = \int_0^{\pi/2} \frac{\mathrm{d}t}{\sqrt{1 - k^2 \sin^2(t)}}$. See also Wikipedia [1295], MathWorld [947], NIST [171], BoostMath [137], Ehrhardt [295] (3.2.1.2), Ehrhardt [295] (4.2.30), Flint [745].

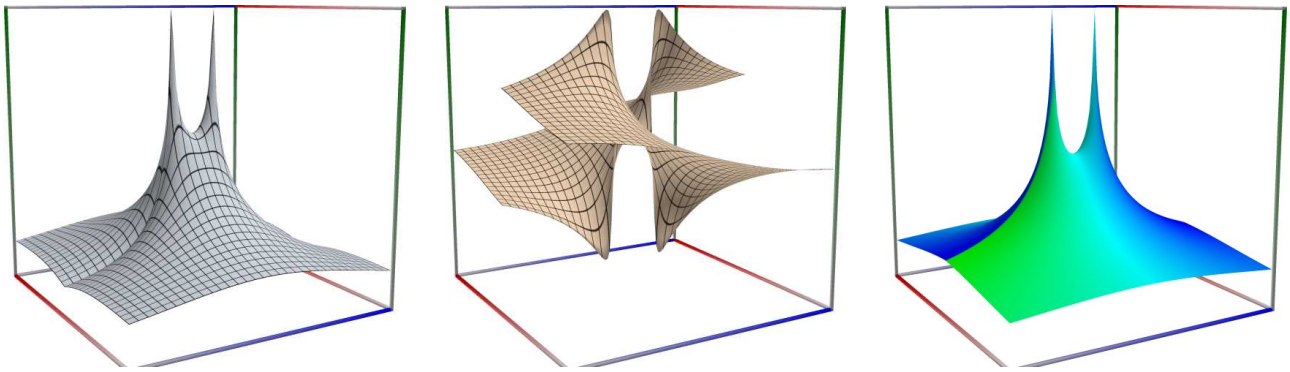

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> k = 0.999; gui.setdps(90)
>>> for ctx in gui.ctxlist_noipm_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.elliptic_k(k)))
    fpm:  4.49559639584215
    mpm:  4.4955963958421441704136088620345815890471504693792005563130118563053119866531054201288167 2
    dpm:  4.4955963958421441704136088620345815890471504693792005563130118563053119866531054201288167 2
    gpm:  4.4955963958421441704136088620345815890471504693792005563130118563053119866531054201288167205
    apm: [4.4955963958421441704136088620345815890471504693792005563130118563053119866531054201288167 +/- 4.10e-88]
 math53:  4.49559639584214
  sreal:  4.495603
  dreal:  4.49559639584215
  ereal:  4.4955963958421441659
  qreal:  4.4955963958421441704136088620345 8
  oreal:  4.4955963958421441704136088620345815890471504693792005563130118563053135
  mreal:  4.4955963958421441704136088620345815890471504693792005563130118563053119866531054201288168 4
 sflint:  4.495603
 dflint:  4.49559639584214
 eflint:  4.4955963958421441599
 qflint:  4.4955963958421441704136088620345 9
 oflint:  4.4955963958421441704136088620345815890471504693792005563130118563053 13
 mflint:  4.4955963958421441704136088620345815890471504693792005563130118563053119866531054201288167 9
 aflint: [4.4955963958421441704136088620345815890471504693792005563130118563053119866531054201288167 +/- 4.56e-88]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> k = -5.1+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.elliptic_k(k)))
```

(continues on next page)

(continued from previous page)

```
    fpm:  (0.412861138519898, -0.444537001058635)
    mpm:  (0.41286113851989793204564328955109815827723507956504865805553699168948263313470802250771696102, -0.44453700105863517304931982050239892554948684608051029191936983051089278)
cmath53:  (0.412861138519898, -0.444537001058635)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> k = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.elliptic_k(k))))
    fpm:  0.412861138519898
    mpm:  0.412861138519879320456432895510981582772350795650486580555369916894826331347080225077169 61
    dpm:  0.412861138519879320456432895510981582772350795650486580555369916894826331347080225077169 61
    gpm:  0.412861138519879320456432895510981582772350795650486580555369916894826331347080225077169 6102
    apm: [0.412861138519879320456432895510981582772350795650486580555369916894826331347080225077169 6 +/- 4.46e-90]
cmath53:  0.412861138519898
sflintc:  0.4128611
dflintc:  0.412861138519898
eflintc:  0.41286113851989793204
qflintc:  0.412861138519897932045643289551098
oflintc:  0.412861138519879320456432895510981582772350795650486580555369916894826331347080225077169 61
mflintc:  0.412861138519879320456432895510981582772350795650486580555369916894826331347080225077169 61
aflintc: [0.412861138519879320456432895510981582772350795650486580555369916894826331347080225077170 +/- 5.07e-89]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> k = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.elliptic_k(k))))
    fpm:  -0.444537001058635
    mpm:  -0.44453700105863517304931982050239892554948684608051029191936983051089277682397805631741978503
    dpm:  -0.44453700105863517304931982050239892554948684608051029191936983051089277682397805631741978503
    gpm:  -0.44453700105863517304931982050239892554948684608051029191936983051089277682397805631741978503
    apm: [-0.44453700105863517304931982050239892554948684608051029191936983051089277682397805631741979 +/- 9.22e-90]
cmath53:  -0.444537001058635
sflintc:  -0.444537
dflintc:  -0.444537001058635
eflintc:  -0.44453700105863517306
qflintc:  -0.44453700105863517304931982050239 9
oflintc:  -0.44453700105863517304931982050239892554948684608051029191936983051089278
mflintc:  -0.44453700105863517304931982050239892554948684608051029191936983051089277682397805631741978503
aflintc: [-0.44453700105863517304931982050239892554948684608051029191936983051089277682397805631741978 +/- 2.83e-89]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

8.3.2 Legendre complete elliptic integral of the second kind, $E(k)$

`ctx.elliptic_e(`k`)`

where `ctx` is `math53`, `mathc53`, `ctxboost` or `ctxflint`.

Note: the original names are: ctx.compEllint2(k), ctxboost.Ellint_2_K(k), mathc53.Elle(k), ctx.ellipticE(k).

Returns the Legendre complete elliptic integral of the second kind, $E(k) = \int_0^{\pi/2} \sqrt{1 - k^2 \sin^2(t)}\, \mathrm{d}t$. See also Wikipedia [1296], MathWorld [948], NIST [171], BoostMath [138], Ehrhardt [295] (3.2.1.2), Ehrhardt [295] (4.2.29), Flint [745].

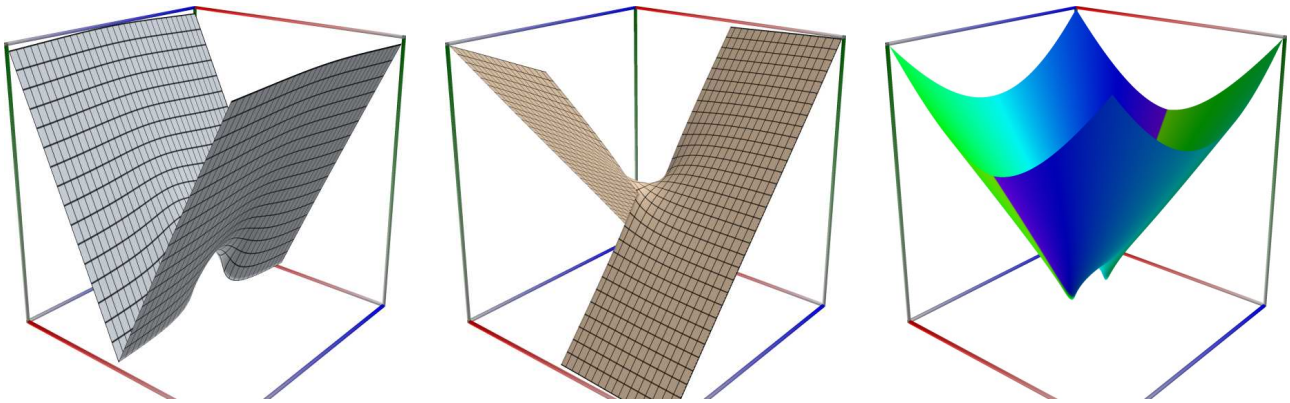

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \leq x \leq 6$ (blue axis), $-6 \leq y \leq 6$ (red axis), $-10 \leq z \leq 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> k = 0.999; gui.setdps(90)
>>> for ctx in gui.ctxlist_noipm_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.elliptic_e(k)))
    fpm:  1.00399440996551
    mpm:  1.00399440996550781767268799600728352603614852308212166505638202231315734265580592590943982
    dpm:  1.00399440996550781767268799600728352603614852308212166505638202231315734265580592590943982
    gpm:  1.00399440996550781767268799600728352603614852308212166505638202231315734265580592590943982
    apm: [1.00399440996550781767268799600728352603614852308212166505638202231315734265580592590943982 +/- 5.07e-86]
 math53:  1.00399440996551
  sreal:  1.003994
  dreal:  1.00399440996551
  ereal:  1.0039944099655078177
  qreal:  1.00399440996550781767268799600728
  oreal:  1.00399440996550781767268799600728352603614852308212166505638202231315734265580592590943982
  mreal:  1.00399440996550781767268799600728352603614852308212166505638202231315734265580592590943982
 sflint:  1.003994
 dflint:  1.00399440996551
 eflint:  1.0039944099655078178
 qflint:  1.00399440996550781767268799600728
 oflint:  1.00399440996550781767268799600728352603614852308212166505638202231315734265580592590943982
 mflint:  1.00399440996550781767268799600728352603614852308212166505638202231315734265580592590943982
 aflint: [1.00399440996550781767268799600728352603614852308212166505638202231315734265580592590943982 +/- 6.52e-86]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> k = -5.1+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.elliptic_e(k)))
    fpm:  (2.22225159488477, 4.83512279534018)
    mpm:  (2.2222515948847695732573014759752043167251215084404941861308871607939616547615517075978919398, 4.8351227953401755391066051866362901598 17)
cmath53:  (2.22225159488477, 4.83512279534017)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> k = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.elliptic_e(k))))
    fpm:  2.22225159488477
    mpm:  2.2222515948847695732573014759752043167251215084404941861308871607939616547615517075978919398
    dpm:  2.2222515948847695732573014759752043167251215084404941861308871607939616547615517075978919398
    gpm:  2.2222515948847695732573014759752043167251215084404941861308871607939616547615517075978919398
    apm: [2.2222515948847695732573014759752043167251215084404941861308871607939616547615517075978919398 +/- 3.32e-87]
```

(continues on next page)

(continued from previous page)

```
cmath53:  2.22225159488477
sflintc:  2.222252
dflintc:  2.22225159488477
eflintc:  2.2222515948847695732
qflintc:  2.22225159488476957325730147597520431672512150844049418613088716079396165476155170759789194
oflintc:  2.22225159488476957325730147597520431672512150844049418613088716079396165476155170759789194
mflintc:  2.22225159488476957325730147597520431672512150844049418613088716079396165476155170759789194
aflintc: [2.22225159488476957325730147597520431672512150844049418613088716079396165476155170759789 +/- 5.54e-87]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> k = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.elliptic_e(k))))
    fpm:  4.83512279534018
    mpm:  4.83512279534017552391066051866362901598167348945915652006283544268798158213075855287053454601
    dpm:  4.83512279534017552391066051866362901598167348945915652006283544268798158213075855287053454601
    gpm:  4.83512279534017552391066051866362901598167348945915652006283544268798158213075855287053454601
    apm: [4.83512279534017552391066051866362901598167348945915652006283544268798158213075855287053454601 +/- 5.93e-87]
cmath53:  4.83512279534017
sflintc:  4.835123
dflintc:  4.83512279534018
eflintc:  4.835122795340175539
qflintc:  4.83512279534017552391066051866362901598167348945915652006283544268798158213075855287053454601
oflintc:  4.83512279534017552391066051866362901598167348945915652006283544268798158213075855287053454601
mflintc:  4.83512279534017552391066051866362901598167348945915652006283544268798158213075855287053454601
aflintc: [4.83512279534017552391066051866362901598167348945915652006283544268798158213075855287053454601 +/- 8.17e-87]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

8.3.3 Legendre complete elliptic integral of the third kind, $\Pi(n;k)$

`ctx.elliptic_pi(`n, k`)`

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

The original names are: ctx.compEllint3(n, k), ctxboost.Ellint3K(n, k), ctx.ellipticPi(n, k).

Returns the Legendre complete elliptic integral of the third kind, $\Pi(n;k) = \int_0^{\pi/2} \frac{\mathrm{d}t}{(1-n\sin^2(t))\sqrt{1-k^2\sin^2(t)}}$. See also Wikipedia [1297], MathWorld [949], NIST [171], BoostMath [139], Ehrhardt [295] (3.2.1.3), Flint [745].

An example with real input:

```
>>> from xlcalcnet import *
>>> n = 0.75; k = 0.5; gui.setdps(90)
>>> for ctx in gui.ctxlist_noipm_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.elliptic_pi(n, k)))
    fpm:  3.45371951091874
    mpm:  3.45371951091874214022306594719053865627319351575861381897538886138475179990928975308149617
    dpm:  3.45371951091874214022306594719053865627319351575861381897538886138475179990928975308149617
    gpm:  3.45371951091874214022306594719053865627319351575861381897538886138475179990928975308149617
    apm: [3.45371951091874214022306594719053865627319351575861381897538886138475179990928975308149617 +/- 5.24e-90]
 math53:  3.45371951091874
  sreal:  3.45372
  dreal:  3.45371951091874
  ereal:  3.4537195109187421404
  qreal:  3.45371951091874214022306594719054
  oreal:  3.45371951091874214022306594719053865627319351575861381897538886138475179990928975308149617
  mreal:  3.45371951091874214022306594719053865627319351575861381897538886138475179990928975308149617
 sflint:  3.45372
 dflint:  3.45371951091874
```

(continues on next page)

(continued from previous page)

```
 eflint:  3.4537195109187421402
 qflint:  3.45371951091874214022306594719054
 oflint:  3.45371951091874214022306594719053865627319351575861381897538886138475179990928975308149617
 mflint:  3.45371951091874214022306594719053865627319351575861381897538886138475179990928975308149617
 aflint: [3.45371951091874214022306594719053865627319351575861381897538886138475179990928975308149617 +/- 6.47e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> n = 0.75+2j;  k = 0.5+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.elliptic_pi(n, k)))
    fpm:  (0.572779786008571, 0.459694393428125)
    mpm:  (0.572779786008571139983829421597175132921, 0.459694393428124992307311563690714197833789740628806464470230838567582300634465662924063705)
cmath53:  (0.572779786007243, 0.459694390754977)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> n = 0.75+2j;  k = 0.5+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.elliptic_pi(n, k))))
    fpm:  0.572779786008571
    mpm:  0.572779786008571139983829421597175132921868213404759731927542347345700001035568506711581903
    dpm:  0.572779786008571139983829421597175132921868213404759731927542347345700001035568506711581903
    gpm:  0.572779786008571139983829421597175132921868213404759731927542347345700001035568506711581902 98
    apm: [0.572779786008571139983829421597175132921868213404759731927542347345700001035568506711581903 +/- 5.85e-91]
cmath53:  0.572779786007243
sflintc:  0.5727798
dflintc:  0.572779786008571
eflintc:  0.57277978600857113996
qflintc:  0.572779786008571139983829421597175
oflintc:  0.5727797860085711399838294215971751329218682134047597319275423473457
mflintc:  0.572779786008571139983829421597175132921868213404759731927542347345700001035568506711581903
aflintc: [0.572779786008571139983829421597175132921868213404759731927542347345700001035568506711581902 +/- 4.90e-90]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> n = 0.75+2j;  k = 0.5+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.elliptic_pi(n, k))))
    fpm:  0.459694393428125
    mpm:  0.459694393428124992307311563690714197833789740628806464470230838567582300634465662924063705
    dpm:  0.459694393428124992307311563690714197833789740628806464470230838567582300634465662924063705
    gpm:  0.459694393428124992307311563690714197833789740628806464470230838567582300634465662924063705
    apm: [0.459694393428124992307311563690714197833789740628806464470230838567582300634465662924063705 +/- 5.18e-91]
cmath53:  0.459694390754977
sflintc:  0.4596944
dflintc:  0.459694393428125
eflintc:  0.4596943934281249923
qflintc:  0.459694393428124992307311563690714
oflintc:  0.45969439342812499230731156369071419783378974062880646447023083856758230
mflintc:  0.459694393428124992307311563690714197833789740628806464470230838567582300634465662924063705
aflintc: [0.459694393428124992307311563690714197833789740628806464470230838567582300634465662924063705 +/- 5.60e-90]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

8.3.4 Legendre incomplete elliptic integral of the first kind, $F(\phi, k)$

`ctx.elliptic_f`(*phi*, *k*)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

The original names are: ctx.ellint1(phi, k), ctxboost.Ellint1F(phi, k), ctx.ellipticF(phi, k),

Returns the Legendre incomplete elliptic integral of the first kind, $F(\phi, k) = \int_0^{\phi} \frac{\mathrm{d}t}{\sqrt{1 - k^2 \sin^2(t)}}$. See also Wikipedia [1302], MathWorld [955], NIST [171], BoostMath [137], Ehrhardt [295] (3.2.1.6), Flint [749], Mpmath [646].

An example with real input:

```
>>> from xlcalcnet import *
>>> phi = 0.75; k = 0.5; gui.setdps(90)
>>> for ctx in gui.ctxlist_noipm_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.elliptic_f(phi, k)))
    fpm:  0.766619034309097
    mpm:  0.766619034309096589544308918544212974274615994676877391995555431875730053660175730568144934
    dpm:  0.766619034309096589544308918544212974274615994676877391995555431875730053660175730568144934
    gpm:  0.766619034309096589544308918544212974274615994676877391995555431875730053660175730568144934401
    apm: [0.766619034309096589544308918544212974274615994676877391995555431875730053660175730568144934 +/- 5.33e-91]
 math53:  0.766619034309097
  sreal:  0.766619
  dreal:  0.766619034309097
  ereal:  0.7666190343090965895
  qreal:  0.766619034309096589544308918544213
  oreal:  0.766619034309096589544308918544212974274615994676877391995555431875730007
  mreal:  0.766619034309096589544308918544212974274615994676877391995555431875730053660175730568144934
 sflint:  0.766619
 dflint:  0.766619034309097
 eflint:  0.7666190343090965895544308918544213
 qflint:  0.766619034309096589544308918544213
 oflint:  0.766619034309096589544308918544212974274615994676877391995555431875730005
 mflint:  0.766619034309096589544308918544212974274615994676877391995555431875730053660175730568144933
 aflint: [0.766619034309096589544308918544212974274615994676877391995555431875730053660175730568144933 +/- 5.36e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> phi = 0.75+2j;  k = 0.5+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.elliptic_f(phi, k)))
    fpm:  (0.765484001590538, 0.716811007324015)
    mpm:  (0.765484001590537602367107431619511742439349801705500605047678788582183500826222059869603294, 0.716811007324015454656463774574292304907073)
cmath53:  (0.765484001590424, 0.716811007323909)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> phi = 0.75+2j;  k = 0.5+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.elliptic_f(phi, k))))
    fpm:  0.765484001590538
    mpm:  0.765484001590537602367107431619511742439349801705500605047678788582183500826222059869603294
    dpm:  0.765484001590537602367107431619511742439349801705500605047678788582183500826222059869603294
    gpm:  0.765484001590537602367107431619511742439349801705500605047678788582183500826222059869603294
    apm: [0.765484001590537602367107431619511742439349801705500605047678788582183500826222059869603294 +/- 2.06e-89]
cmath53:  0.765484001590424
sflintc:  0.765484
dflintc:  0.765484001590538
eflintc:  0.7654840015905376023
qflintc:  0.765484001590537602367107431619512
oflintc:  0.765484001590537602367107431619511742439349801705500605047678788582183500826222059869603293
mflintc:  0.765484001590537602367107431619511742439349801705500605047678788582183500826222059869603294
aflintc: [0.765484001590537602367107431619511742439349801705500605047678788582183500826222059869603294 +/- 6.53e-89]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> phi = 0.75+2j;  k = 0.5+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.elliptic_f(phi, k))))
    fpm:  0.716811007324015
    mpm:  0.71681100732401545654637745742923049070730689469199736909148823600340912778818967544500233402
    dpm:  0.71681100732401545654637745742923049070730689469199736909148823600340912778818967544500233402
    gpm:  0.71681100732401545654637745742923049070730689469199736909148823600340912778818967544500233402
    apm: [0.71681100732401545654637745742923049070730689469199736909148823600340912778818967544500233402 +/- 4.86e-89]
cmath53:  0.716811007323909
sflintc:  0.716811
dflintc:  0.716811007324015
eflintc:  0.7168110073240154565
qflintc:  0.71681100732401545654637745742923l
oflintc:  0.71681100732401545654637745742923049070730689469199736909148823600340913
mflintc:  0.71681100732401545654637745742923049070730689469199736909148823600340912778818967544500233402
aflintc: [0.71681100732401545654637745742923049070730689469199736909148823600340912778818967544500233402 +/- 9.29e-89]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

8.3.5 Legendre incomplete elliptic integral of the second kind, $E(\phi, k)$

`ctx.`**`elliptic_e_inc`**(*phi*, *k*)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

The original names are: ctx.ellint2(phi, k), ctxboost.Ellint2E(phi, k), ctx.ellipticEInc(phi, k).

Returns the Legendre incomplete elliptic integral of the second kind, $E(\phi, k) = \int_0^{\phi} \sqrt{1 - k^2 \sin^2(t)}\, \mathrm{d}t$. See also Wikipedia [1303], MathWorld [956], NIST [171], BoostMath [138], Ehrhardt [295] (3.2.1.7), Flint [749], Mpmath [654].

An example with real input:

```
>>> from xlcalcnet import *
>>> phi = 0.75; k = 0.5; gui.setdps(90)
>>> for ctx in gui.ctxlist_noipm_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.elliptic_e_inc(phi, k)))
    fpm:  0.734000489648948
    mpm:  0.73400048964894783655867869469985453815532816696830115716437836741114082591153679844074225
    dpm:  0.73400048964894783655867869469985453815532816696830115716437836741114082591153679844074225
    gpm:  0.73400048964894783655867869469985453815532816696830115716437836741114082591153679844074225004
    apm: [0.73400048964894783655867869469985453815532816696830115716437836741114082591153679844074225 +/- 1.42e-90]
 math53:  0.734000489648948
  sreal:  0.7340005
  dreal:  0.734000489648948
  ereal:  0.7340004896489478365
  qreal:  0.734000489648947836558678694699855
  oreal:  0.73400048964894783655867869469985453815532816696830115716437836741114084
  mreal:  0.73400048964894783655867869469985453815532816696830115716437836741114082591153679844074225
 sflint:  0.7340005
 dflint:  0.734000489648948
 eflint:  0.7340004896489478365
 qflint:  0.734000489648947836558678694699855
 oflint:  0.73400048964894783655867869469985453815532816696830115716437836741114082
 mflint:  0.73400048964894783655867869469985453815532816696830115716437836741114082591153679844074225
 aflint: [0.73400048964894783655867869469985453815532816696830115716437836741114082591153679844074225 +/- 4.30e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> phi = 0.75+2j;  k = 0.5+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.elliptic_e_inc(phi, k)))
```

(continues on next page)

(continued from previous page)

```
    fpm:  (-1.76997464001058, 6.21831560029404)
    mpm:  (-1.769974640010579481200447835314572055914, 6.218315600294037841322441928413981817353)
cmath53:  (-1.76997464001069, 6.21831560029393)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> phi = 0.75+2j;  k = 0.5+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.elliptic_e_inc(phi, k))))
    fpm:  -1.76997464001058
    mpm:  -1.769974640010579481200447835314572055913695736220435722255351669194401813254092436923780 43
    dpm:  -1.769974640010579481200447835314572055913695736220435722255351669194401813254092436923780 43
    gpm:  -1.769974640010579481200447835314572055913695736220435722255351669194401813254092436923780 43
    apm: [-1.769974640010579481200447835314572055913695736220435722255351669194401813254092436923780 +/- 5.02e-88]
cmath53:  -1.76997464001069
sflintc:  -1.769975
dflintc:  -1.76997464001058
eflintc:  -1.7699746400105794812
qflintc:  -1.769974640010579481200447835314572
oflintc:  -1.769974640010579481200447835314572055913695736220435722255351669194401813254092436923780 18
mflintc:  -1.769974640010579481200447835314572055913695736220435722255351669194401813254092436923780 42
aflintc: [-1.769974640010579481200447835314572055913695736220435722255351669194401813254092436923780 +/- 7.29e-88]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> phi = 0.75+2j;  k = 0.5+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.elliptic_e_inc(phi, k))))
    fpm:  6.21831560029404
    mpm:  6.218315600294037841322441928413981817352738400041114740774383409634563993696473645235580439
    dpm:  6.218315600294037841322441928413981817352738400041114740774383409634563993696473645235580439
    gpm:  6.218315600294037841322441928413981817352738400041114740774383409634563993696473645235580439
    apm: [6.218315600294037841322441928413981817352738400041114740774383409634563993696473645235580439 +/- 9.51e-89]
cmath53:  6.21831560029393
sflintc:  6.218316
dflintc:  6.21831560029404
eflintc:  6.2183156002940378412
qflintc:  6.218315600294037841322441928413981
oflintc:  6.218315600294037841322441928413981817352738400041114740774383409634564
mflintc:  6.218315600294037841322441928413981817352738400041114740774383409634563993696473645235580436
aflintc: [6.218315600294037841322441928413981817352738400041114740774383409634563993696473645235580439 +/- 6.75e-88]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

8.3.6 Legendre incomplete elliptic integral of the third kind, $\Pi(n, \phi, k)$

`ctx.`**`elliptic_pi_inc`**(*n*, *phi*, *k*)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

The original names are: ctx.ellint3(phi, n, k), ctxboost.Ellint3F(phi, n, k), ctx.ellipticPiInc(phi, n, k).

Returns the Legendre incomplete elliptic integral of the third kind, $\Pi(n, \phi, k) = \int_0^{\phi} \frac{\mathrm{d}t}{(1 - n\sin^2(t))\sqrt{1 - k^2\sin^2(t)}}$. See also Wikipedia [1304], MathWorld [957], NIST [171], BoostMath [139], Ehrhardt [295] (3.2.1.8), Flint [749], Mpmath [655].

An example with real input:

```
>>> from xlcalcnet import *
>>> n = 0.55; phi = 0.18; k = 0.01; gui.setdps(90)
>>> for ctx in gui.ctxlist_noipm_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.elliptic_pi_inc(n, phi, k)))
    fpm:  0.181073791234071
    mpm:  0.181073791234070796886074613520839342602696824399845666145726335155522163242258509156477838
    dpm:  0.180019414729767598649270814679281843259961606637409883657068624908338267732377821404344358
    gpm:  0.180019414729767598649270814679281843259961606637409883657068624908338267732377821404434435799
    apm: [0.181073791234070796886074613520839342602696824399845666145726335155522163242258509156477838 +/- 2.30e-91]
 math53:  0.181969627516793
  sreal:  0.1810738
  dreal:  0.181073791234071
  ereal:  0.1810737912340707969
  qreal:  0.181073791234070796886074613520839
  oreal:  0.181073791234070796886074613520839342602696824399845666145726335155522217
  mreal:  0.181073791234070796886074613520839342602696824399845666145726335155522163242258509156477838
 sflint:  0.1810738
 dflint:  0.181073791234071
 eflint:  0.1810737912340707969
 qflint:  0.181073791234070796886074613520839
 oflint:  0.181073791234070796886074613520839342602696824399845666145726335155522216
 mflint:  0.181073791234070796886074613520839342602696824399845666145726335155522163242258509156477838
 aflint: [0.181073791234070796886074613520839342602696824399845666145726335155522163242258509156477838 +/- 8.25e-91]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> n = -5.1+2j;  phi = 2.7+2j; k = 1.3+2j;  gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.m_elliptic_pi_inc(n, phi, k)))
    fpm:  (0.3220040007340083, 0.751422520797896)
    mpm:  (0.3220040073400829546054227879987298519782, 0.751422520797895434234488793898576841641608 5)
cmath53:  (0.322004003941805, 0.751422522223148)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> n = -5.1+2j;  phi = 2.7+2j; k = 1.3+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.m_elliptic_pi_inc(n, phi, k))))
    fpm:  0.322004007340083
    mpm:  0.322004007340082954605422787998728249731886004300657524161176238451434722979010479580052089
    dpm:  0.322004007340082954605422787998728249731886004300657524161176238451434722979010479580052089
    gpm:  0.322004007340082954605422787998728249731886004300657524161176238451434722979010479580052089
    apm: [0.322004007340082954605422787998728249731886004300657524160758008006523921340316754762 95 +/- 6.81e-87]
cmath53:  0.322004003941805
sflintc:  0.322004
dflintc:  0.322004007340083
eflintc:  0.3220040073400829546 1
qflintc:  0.322004007340082954605422787998728
oflintc:  0.322004007340082954605422787998728249731886004300657524160758008006523 92
mflintc:  0.322004007340082954605422787998728249731886004300657524160758008006523921340316754762945202
aflintc: [0.322004007340082954605422787998728249731886004300657524160758008006523921340316754762 9 +/- 5.07e-86]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> n = -5.1+2j;  phi = 2.7+2j; k = 1.3+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.m_elliptic_pi_inc(n, phi, k))))
    fpm:  0.751422520797896
    mpm:  0.751422520797895434234488793898574144443223395508373219552455925979035549446564959995815034
    dpm:  0.751422520797895434234488793898574144443223395508373219552455925979035549446564959995815034
    gpm:  0.751422520797895434234488793898574144443223395508373219552455925979035549446564959995581503402
    apm: [0.751422520797895434234488793898574144443223395508373219551751891507172153605474800586 03 +/- 6.12e-87]
cmath53:  0.751422522223148
sflintc:  0.7514225
```

(continues on next page)

(continued from previous page)

```
dflintc:  0.751422520797896
eflintc:  0.75142252079789543422
qflintc:  0.751422520797895434234488793898574
oflintc:  0.751422520797895434234488793898574144443223395508373219551751891507172153605474800586026195
mflintc:  0.751422520797895434234488793898574144443223395508373219551751891507172153605474800586026195
aflintc: [0.751422520797895434234488793898574144443223395508373219551751891507172153605474800586026195 +/- 3.25e-86]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

8.4 Jacobi elliptic functions

For an introduction, see Wikipedia [1305], MathWorld [959], BoostMath [153], NIST [474], Mpmath [653].

8.4.1 Jacobi elliptic function $\mathrm{sn}(x, k)$

`ctx.jacobi_sn`(x, k)

where `ctx` is `math53`, `mathc53` or `ctxboost`.

Returns the Jacobi elliptic function $\mathrm{sn}(x, k) = \sin(\mathrm{am}(x, k))$, where $\mathrm{am}(x, k)$ denotes the Jacobi amplitude function, and $\mathrm{sn}(x, 0) = \sin(x)$. See also BoostMath [157], Wikipedia [1305], MathWorld [277], NIST [474], Ehrhardt [295] (3.2.11.1), Ehrhardt [295] (4.2.58).

The version for `ecplx` has the restriction that k must be real.

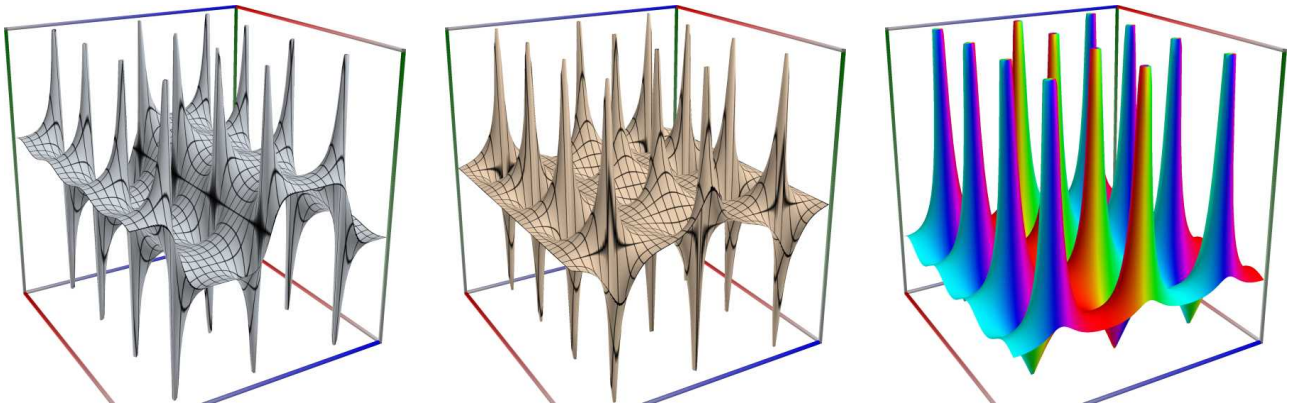

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; k = 2.7; gui.setdps(90)
>>> for ctx in gui.ctxlist_noipm_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.jacobi_sn(x, k)))
    fpm:  0.246362683303348
    mpm:  0.24636268330334782627746916207939708998901656589814040818523897348682769469454041470961669 5
    dpm:  0.24636268330334782627746916207939708998901656589814040818523897348682769469454041470961669 5
    gpm:  0.24636268330334782627746916207939708998901656589814040818523897348682769469454041470961669 5
    apm: [0.24636268330334782627746916207939708998901656589814040818523897348682769469454041470962 +/- 5.64e-87]
 math53:  0.246362683303348
  sreal:  0.2463627
  dreal:  0.246362683303348
  ereal:  0.24636268330334782655
  qreal:  0.24636268330334782627746916207939 7
  oreal:  0.24636268330334782627746916207939708998901656589814040818523897348682771
  mreal:  0.24636268330334782627746916207939708998901656589814040818523897348682769469454041470961669 4
 sflint:  0.2463627
 dflint:  0.246362683303348
 eflint:  0.24636268330334782628
 qflint:  0.24636268330334782627746916207939 7
 oflint:  0.24636268330334782627746916207939708998901656589814040818523897348682769
 mflint:  0.24636268330334782627746916207939708998901656589814040818523897348682769469454041470961671 4
 aflint: [0.24636268330334782627746916207939708998901656589814040818523897348682769469454041471 +/- 1.37e-84]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  k = 2.7+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.jacobi_sn(x, k)))
    fpm:  (-0.00143593649241395, 0.0129568587163219)
    mpm:  (-0.0014359364924139520238104832097580475578933623210664376853997920897862668936907083534368519
3, 0.012956858716321868595137391489715969101741739276294701125041507374015020433373424174489930101)
cmath53:  (-0.00143593649240608, 0.0129568587163203)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  k = 2.7+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.jacobi_sn(x, k))))
    fpm:  -0.00143593649241395
    mpm:  -0.0014359364924139520238104832097580475578933623210664376853997920897862668936907083534368519
3
    dpm:  -0.0014359364924139520238104832097580475578933623210664376853997920897862668936907083534368519
3
    gpm:  -0.0014359364924139520238104832097580475578933623210664376853997920897862668936907083534368519
299
    apm: [-0.0014359364924139520238104832097580475578933623210664376853997920897862668936907083534 +/- 4.72e-86]
cmath53:  -0.00143593649240608
sflintc:  -0.001435871
dflintc:  -0.00143593649241371
eflintc:  -0.001435936492413951964 9
qflintc:  -0.001435936492413952023810483209758047557893362321066437685399792089786
oflintc:  -0.001435936492413952023810483209758047557893362321066437685399792089786
mflintc:  -0.001435936492413952023810483209758047557893362321066437685399792089786260689369070835343682949
aflintc: [-0.001435936492413952023810483209758047557893362321066437685399792089786266893690708353 +/- 6.17e-84]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  k = 2.7+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.jacobi_sn(x, k))))
    fpm:  0.0129568587163219
    mpm:  0.012956858716321868595137391489715969101741739276294701125041507374015020433373424174489930
1
    dpm:  0.012956858716321868595137391489715969101741739276294701125041507374015020433373424174489930
1
    gpm:  0.012956858716321868595137391489715969101741739276294701125041507374015020433373424174489930
0101
    apm: [0.012956858716321868595137391489715969101741739276294701125041507374015020433373424174 +/- 2.05e-86]
cmath53:  0.0129568587163203
sflintc:  0.01295693
dflintc:  0.0129568587163221
eflintc:  0.012956858716321868 59
qflintc:  0.012956858716321868595137391489716 2
oflintc:  0.012956858716321868595137391489715969101741739276294701125041507374015
mflintc:  0.012956858716321868595137391489715969101741739276294701125041507374015020433373424174489958
7
aflintc: [0.012956858716321868595137391489715969101741739276294701125041507374015020433373424174 +/- 7.22e-84]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

8.4.2 Jacobi elliptic function $\mathrm{cn}(x, k)$

`ctx.jacobi_cn`(x, k)

where `ctx` is `math53`, `mathc53` or `ctxboost`.

Returns the Jacobi elliptic function $\mathrm{cn}(x, k) = \cos(\mathrm{am}(x, k))$, where $\mathrm{am}(x, k)$ denotes the Jacobi amplitude function, and $\mathrm{cn}(x, 0) = \cos(x)$. See also BoostMath [143], Wikipedia [1305], MathWorld [267], NIST [474], Ehrhardt [295] (3.2.11.2), Ehrhardt [295] (4.2.18).

The version for `ecplx` has the restriction that k must be real.

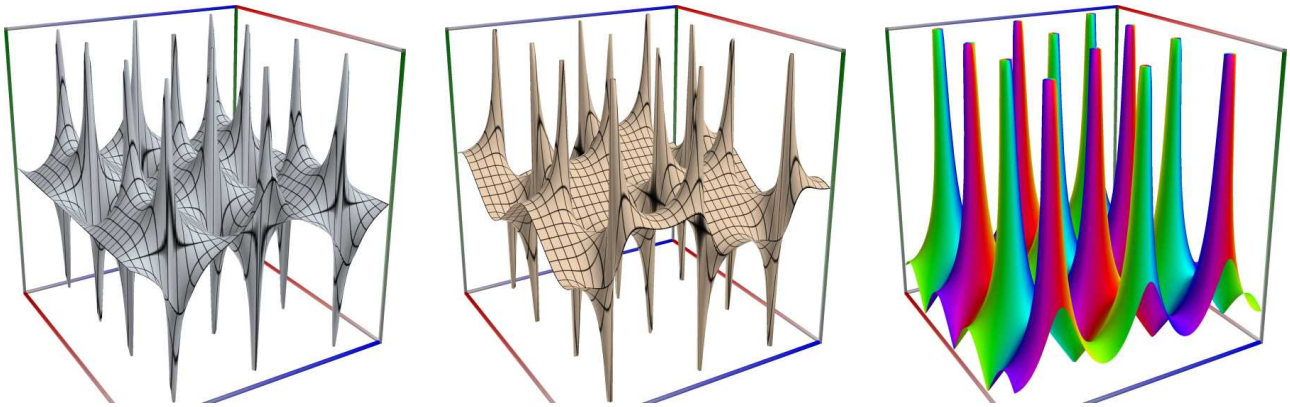

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; k = 2.7; gui.setdps(90)
>>> for ctx in gui.ctxlist_noipm_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.jacobi_cn(x, k)))
    fpm:  0.969177707273323
    mpm:  0.969177707273322678224481900625086532746690114216882486313007790123473968926133547388534709
    dpm:  0.969177707273322678224481900625086532746690114216882486313007790123473968926133547388534709
    gpm:  0.969177707273322678224481900625086532746690114216882486313007790123473968926133547388534708953470895
    apm: [0.969177707273322678224481900625086532746690114216882486313007790123473968926133547388 5 +/- 4.76e-86]
 math53:  0.969177707273323
  sreal:  0.9691777
  dreal:  0.969177707273323
  ereal:  0.96917770727332267834
  qreal:  0.969177707273322678224481900625087
  oreal:  0.969177707273322678224481900625086532746690114216882486313007790123473 5
  mreal:  0.969177707273322678224481900625086532746690114216882486313007790123473968926133547388534 1
 sflint:  0.9691777
 dflint:  0.969177707273323
 eflint:  0.96917770727332267823
 qflint:  0.969177707273322678224481900625087
 oflint:  0.969177707273322678224481900625086532746690114216882486313007790123473 7
 mflint:  0.969177707273322678224481900625086532746690114216882486313007790123473968926133547388534702
 aflint: [0.969177707273322678224481900625086532746690114216882486313007790123473968926133547 9 +/- 5.13e-84]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  k = 2.7+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.jacobi_cn(x, k)))
    fpm:  (-1.00008290587345, -1.8603683903155E-05)
    mpm:  (-1.000082905873448841175011671540975684772, -0.000018603683903155007808515166678358685441 3)
cmath53:  (-1.00008290587346, -1.86036838914253E-05)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  k = 2.7+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.jacobi_cn(x, k))))
    fpm:  -1.00008290587345
    mpm:  -1.000082905873448841175011671540975684771725746260129426069557524013782081473466756288095 32
    dpm:  -1.000082905873448841175011671540975684771725746260129426069557524013782081473466756288095 32
    gpm:  -1.000082905873448841175011671540975684771725746260129426069557524013782081473466756288095 3199
    apm: [-1.000082905873448841175011671540975684771725746260129426069557524013782081473466756288 +/- 2.32e-85]
cmath53:  -1.00008290587346
sflintc:  -1.000083
dflintc:  -1.00008290587345
eflintc:  -1.0000829058734488412
qflintc:  -1.000082905873448841175011671540 98
oflintc:  -1.000082905873448841175011671540975684771725746260129426069557524013 78
mflintc:  -1.000082905873448841175011671540975684771725746260129426069557524013782081473466756288095 32
aflintc: [-1.000082905873448841175011671540975684771725746260129426069557524013782081473466756 3 +/- 7.28e-83]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  k = 2.7+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.jacobi_cn(x, k))))
    fpm:  -1.8603683903155E-05
    mpm:  -0.000018603683903155007808515166678358685441863655445045320960526265049448165459640441 3556724113
    dpm:  -0.000018603683903155007808515166678358685441863655445045320960526265049448165459640441 3556724113
    gpm:  -1.860368390315500780851516667835868544186365544504532096052626504944816545964044135567 24113e-05
    apm: [-1.860368390315500780851516667835868544186365544504532096052626504944816545964044135567 24113e-05]
cmath53:  -1.86036838914253E-05
sflintc:  -1.860294E-05
dflintc:  -1.86036839031523E-05
eflintc:  -1.8603683903155007136e-05
qflintc:  -1.860368390315500780851516667835 63e-05
oflintc:  -1.860368390315500780851516667835868544186365544504532096052626505e-05
mflintc:  -1.860368390315500780851516667835868544186365544504532096052626504944816545964044135567 20285E-05
aflintc: [-1.860368390315500780851516667835868544186365544504532096052626504944816545964 0e-5 +/- 5.03e-82]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

8.4.3 Jacobi elliptic function $\mathrm{dn}(x, k)$

`ctx.jacobi_dn`(x, k)

where `ctx` is `math53`, `mathc53` or `ctxboost`.

Returns the Jacobi elliptic function $\mathrm{dn}(x, k) = \sqrt{1 - k^2 \mathrm{sn}^2(x, k)}$ with $\mathrm{dn}(x, 0) = 1$. See also BoostMath [146], Wikipedia [1305], MathWorld [270], NIST [474], Ehrhardt [295] (3.2.11.3), Ehrhardt [295] (4.2.26).

The version for `ecplx` has the restriction that k must be real.

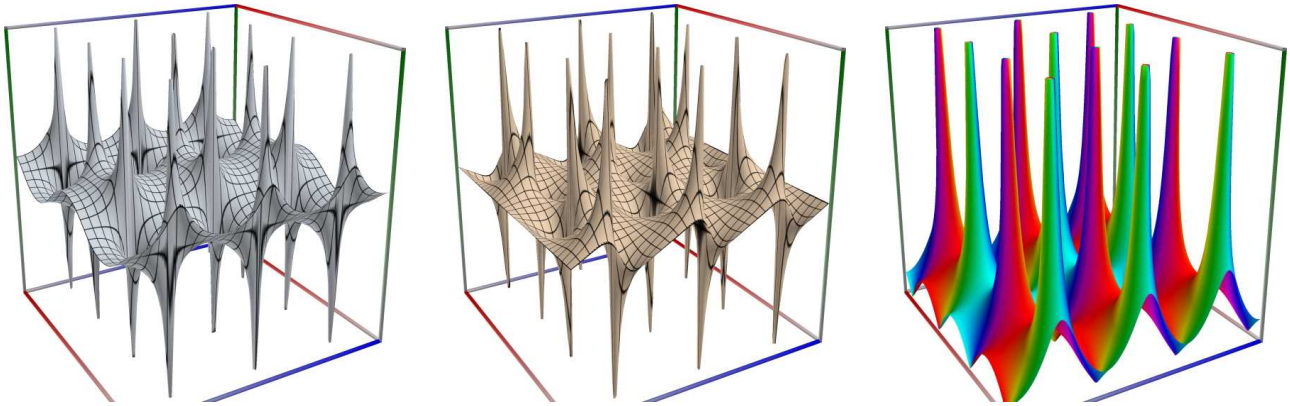

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; k = 2.7; gui.setdps(90)
>>> for ctx in gui.ctxlist_noipm_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.jacobi_dn(x, k)))
    fpm:  0.746683716260732
    mpm:  0.7466837162607317463081105724413404585759847199091695040181679056691429000032667694867620 92
    dpm:  0.7466837162607317463081105724413404585759847199091695040181679056691429000032667694867620 92
    gpm:  0.7466837162607317463081105724413404585759847199091695040181679056691429000032667694867620 9195
    apm: [0.7466837162607317463081105724413404585759847199091695040181679056691429000032667694868 +/- 5.06e-86]
 math53:  0.746683716260732
  sreal:  0.7466837
  dreal:  0.746683716260732
  ereal:  0.7466837162607317456 4
  qreal:  0.7466837162607317463081105724413 41
  oreal:  0.7466837162607317463081105724413404585759847199091695040181679056691428 6
  mreal:  0.7466837162607317463081105724413404585759847199091695040181679056691429000032667694867620 95
 sflint:  0.7466837
 dflint:  0.746683716260732
 eflint:  0.7466837162607317462 9
 qflint:  0.7466837162607317463081105724413 4
 oflint:  0.7466837162607317463081105724413404585759847199091695040181679056691429
 mflint:  0.7466837162607317463081105724413404585759847199091695040181679056691429000032667694867620 46
 aflint: [0.7466837162607317463081105724413404585759847199091695040181679056691429000032667694 9 +/- 6.57e-84]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  k = 2.7+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.jacobi_dn(x, k)))
    fpm:  (-1.00007228950877, -0.000956560725679442)
    mpm:  (-1.0000722895087734479256217752909008325 65, -0.0009565607256794425237716971223176896357369)
cmath53:  (-1.00007228950877, -0.000956560725669281)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  k = 2.7+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.jacobi_dn(x, k))))
    fpm:  -1.00007228950877
    mpm:  -1.000072289508773447925621775290900832564735083976226645784525885241394772746668301702 9953
    dpm:  -1.000072289508773447925621775290900832564735083976226645784525885241394772746668301702 9953
    gpm:  -1.000072289508773447925621775290900832564735083976226645784525885241394772746668301702 9953
    apm: [-1.000072289508773447925621775290900832564735083976226645784525885241394772746668301703 +/- 1.55e-85]
cmath53:  -1.00007228950877
sflintc:  -1.000072
dflintc:  -1.00007228950877
eflintc:  -1.000072289508773448
qflintc:  -1.000072289508773447925621775290 9
oflintc:  -1.000072289508773447925621775290900832564735083976226645784525885241 9
mflintc:  -1.000072289508773447925621775290900832564735083976226645784525885241394772746668301702 9953
aflintc: [-1.000072289508773447925621775290900832564735083976226645784525885241394772746668301 7 +/- 5.99e-83]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  k = 2.7+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.jacobi_dn(x, k))))
    fpm:  -0.000956560725679442
    mpm:  -0.000956560725679442523771697122317689635735289516420598889387387777738180440932184663646331782
    dpm:  -0.000956560725679442523771697122317689635735289516420598889387387777738180440932184663646331782
    gpm:  -0.000956560725679442523771697122317689635735289516420598889387387777738180440932184663646331782 04
    apm: [-0.000956560725679442523771697122317689635735289516420598889387387777738180440932184664 +/- 5.04e-85]
cmath53:  -0.000956560725669281
sflintc:  -0.0009565695
dflintc:  -0.000956560725679474
eflintc:  -0.0009565560725679442 3142
qflintc:  -0.000956560725679442523771697122317717
oflintc:  -0.000956560725679442523771697122317689635735289516420598889387387777774
mflintc:  -0.000956560725679442523771697122317689635735289516420598889387387777738180440932184663646335 6
aflintc: [-0.000956560725679442523771697122317689635735289516420598889387387777738180440932184 7 +/- 9.33e-83]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

8.4.4 Jacobi elliptic function $\mathrm{nc}(x, k)$

`ctx.jacobi_nc`(x, k)

where `ctx` is `math53` or `ctxboost`.

Returns the Jacobi elliptic function $\mathrm{nc}(x, k) = 1/\mathrm{cn}(x, k)$, with $\mathrm{nc}(x, 0) = 1/\cos(x)$. See also BoostMath [148], Wikipedia [1305], MathWorld [272], NIST [474], Ehrhardt [295] (3.2.11.4).

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; k = 2.7; gui.setdps(90)
>>> for ctx in gui.ctxlist_noipm_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.jacobi_nc(x, k)))
    fpm:  1.03180251928554
    mpm:  1.03180251928554210134149112819061701718554842312212495917928474564951190584338549190884984
    dpm:  1.03180251928554210134149112819061701718554842312212495917928474564951190584338549190884984
    gpm:  1.03180251928554210134149112819061701718554842312212495917928474564951190584338549190884984
    apm: [1.03180251928554210134149112819061701718554842312212495917928474564951190584338549190884 +/- 6.35e-86]
 math53:  1.03180251928554
  sreal:  1.031803
  dreal:  1.03180251928554
  ereal:  1.0318025192855421013
  qreal:  1.03180251928554210134149112819062
  oreal:  1.03180251928554210134149112819061701718554842312212495917928474564951190
  mreal:  1.03180251928554210134149112819061701718554842312212495917928474564951190584338549190884984
 sflint:  1.031803
 dflint:  1.03180251928554
 eflint:  1.0318025192855421014
 qflint:  1.03180251928554210134149112819062
 oflint:  1.03180251928554210134149112819061701718554842312212495917928474564951190
 mflint:  1.03180251928554210134149112819061701718554842312212495917928474564951190584338549190884985
 aflint: [1.03180251928554210134149112819061701718554842312212495917928474564951190584338549191 +/- 5.05e-84]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  k = 2.7+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.jacobi_nc(x, k)))
    fpm:  (-0.999917100653354, 1.86005995709601E-05)
    mpm:  (-0.99991710065335422600384049755695555685111, 0.000018600599570960129165809751701248169084 64)
cmath53:  (-0.999917100653346, 1.86005995592801E-05)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  k = 2.7+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.jacobi_nc(x, k))))
    fpm:  -0.999917100653354
    mpm:  -0.99991710065335422600384049755695555685110777327385288338391121047602830401095239451642806 51
    dpm:  -0.99991710065335422600384049755695555685110777327385288338391121047602830401095239451642806 51
    gpm:  -0.99991710065335422600384049755695555685110777327385288338391121047602830401095239451642806 5098
    apm: [-0.99991710065335422600384049755695555685110777327385288338391121047602830401095239451642 +/- 4.18e-85]
cmath53:  -0.999917100653346
sflintc:  -0.9999171
dflintc:  -0.999917100653354
eflintc:  -0.99991710065335422602
qflintc:  -0.999917100653354226003840497556956
oflintc:  -0.99991710065335422600384049755695555685110777327385288338391121047602 8
mflintc:  -0.99991710065335422600384049755695555685110777327385288338391121047602830401095239451642806 51
aflintc: [-0.99991710065335422600384049755695555685110777327385288338391121047602830401095239 45 +/- 2.26e-82]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  k = 2.7+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.jacobi_nc(x, k))))
    fpm:  1.86005995709601E-05
    mpm:  0.000018600599570960129165809751701248169084786226400286546164337100686301288321759216781517409399e-05
    dpm:  0.000018600599570960129165809751701248169084786226400286546164337100686301288321759216781517409399e-05
    gpm:  1.860059957096012916580975170124816908478622640028654616433710068630128832175921678151740939e-05
    apm: [1.860059957096012916580975170124816908478622640028654616433710068630128832175921678151740939e-05 +/- 3.55e-85]
cmath53:  1.86005995592801E-05
sflintc:  1.859986E-05
dflintc:  1.86005995709574E-05
eflintc:  1.8600599570960128495e-05
qflintc:  1.860059957096012916580975170124580e-05
oflintc:  1.860059957096012916580975170124816908478622640028654616433710069e-05
mflintc:  1.860059957096012916580975170124816908478622640028654616433710068630128832175921678151740266E-05
aflintc: [1.860059957096012916580975170124816908478622640028654616433710068630128832175921678151740266E-05 +/- 7.76e-83]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

8.4.5 Jacobi elliptic function $\mathrm{sc}(x, k)$

`ctx.jacobi_sc`(x, k)

where `ctx` is `math53` or `ctxboost`.

Returns the Jacobi elliptic function $\mathrm{sc}(x, k) = \mathrm{sn}(x, k)/\mathrm{cn}(x, k)$. See also BoostMath [151], Wikipedia [1305], MathWorld [275], NIST [474], Ehrhardt [295] (3.2.11.5).

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; k = 2.7; gui.setdps(90)
>>> for ctx in gui.ctxlist_noipm_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.jacobi_sc(x, k)))
    fpm:  0.25419763729034
    mpm:  0.254197637290340446568833303692720684163750610220405803964891493073733507552416997494302416
    dpm:  0.254197637290340446568833303692720684163750610220405803964891493073733507552416997494302416
    gpm:  0.254197637290340446568833303692720684163750610220405803964891493073733507552416997494302415 99
    apm: [0.254197637290340446568833303692720684163750610220405803964891493073733507552416997494302 +/- 8.17e-87]
 math53:  0.25419763729034
  sreal:  0.2541976
  dreal:  0.25419763729034
  ereal:  0.25419763729034044683
  qreal:  0.25419763729034044656883330369272
  oreal:  0.254197637290340446568833303692720684163750610220405803964891493073733 53
  mreal:  0.254197637290340446568833303692720684163750610220405803964891493073733507552416997494302415
 sflint:  0.2541976
 dflint:  0.25419763729034
 eflint:  0.25419763729034044656
 qflint:  0.254197637290340446568833303692721
 oflint:  0.2541976372903404465688333036927206841637506102204058039648914930737335075524169974943024 38
 mflint:  0.254197637290340446568833303692720684163750610220405803964891493073733507552416997494302438
 aflint: [0.25419763729034044656883330369272068416375061022040580396489149307373350755241699749 +/- 6.28e-84]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  k = 2.7+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.jacobi_sc(x, k)))
    fpm:  (0.00143557644887623, -0.0129558113104794)
    mpm:  (0.001435576448876226275220573401414661179617, -0.012955811310479408631223226114149383533 68)
cmath53:  (0.0014355764488685, -0.0129558113104777)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  k = 2.7+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.jacobi_sc(x, k))))
    fpm:  0.00143557644887623
    mpm:  0.001435576448876226275220573401414661179629706332767022869475616709389343159837335374194220 04
    dpm:  0.001435576448876226275220573401414661179629706332767022869475616709389343159837335374194220 04
    gpm:  0.001435576448876226275220573401414661179629706332767022869475616709389343159837335374194220 0401
    apm: [0.00143557644887622627522057340141466117962970633276702286947561670938934315983733537419422 00401 +/- 1.81e-86]
cmath53:  0.0014355764488685
sflintc:  0.001435511
dflintc:  0.00143557644887598
eflintc:  0.001435576448876226216 3
qflintc:  0.00143557644887622627522057340141445
oflintc:  0.0014355764488762262752205734014146611796297063327670228694756167093 89
mflintc:  0.001435576448876226275220573401414661179629706332767022869475616709389343159837335374194197 61
aflintc: [0.00143557644887622627522057340141466117962970633276702286947561670938934315983733537 +/- 7.80e-84]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  k = 2.7+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.jacobi_sc(x, k))))
    fpm:  -0.0129558113104794
    mpm:  -0.012955811310479408631223226114149383533671211744183730624293587173491832060796302915022986 3
    dpm:  -0.012955811310479408631223226114149383533671211744183730624293587173491832060796302915022986 3
    gpm:  -0.012955811310479408631223226114149383533671211744183730624293587173491832060796302915022986 3
    apm: [-0.012955811310479408631223226114149383533671211744183730624293587173491832060796302915 0 +/- 3.53e-86]
cmath53:  -0.0129558113104777
sflintc:  -0.01295588
dflintc:  -0.0129558113104797
eflintc:  -0.012955811310479408695
qflintc:  -0.012955811310479408631223226114149 6
oflintc:  -0.012955811310479408631223226114149383533671211744183730624293587173492
mflintc:  -0.012955811310479408631223226114149383533671211744183730624293587173491832060796302915023014 8
aflintc: [-0.012955811310479408631223226114149383533671211744183730624293587173491832060796302 92 +/- 8.58e-84]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

8.4.6 Jacobi elliptic function $\mathrm{dc}(x, k)$

`ctx.jacobi_dc`(x, k)

where `ctx` is `math53` or `ctxboost`.

Returns the Jacobi elliptic function $\mathrm{dc}(x, k) = \mathrm{dn}(x, k)/\mathrm{cn}(x, k)$. See also BoostMath [145], Wikipedia [1305], MathWorld [269], NIST [474], Ehrhardt [295] (3.2.11.6).

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; k = 2.7; gui.setdps(90)
>>> for ctx in gui.ctxlist_noipm_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.jacobi_dc(x, k)))
    fpm:  0.770430139547314
    mpm:  0.770430139547313914002540510081163800017336821479199508488452564388996252749623613774534154
    dpm:  0.770430139547313914002540510081163800017336821479199508488452564388996252749623613774534154
    gpm:  0.770430139547313914002540510081163800017336821479199508488452564388996252749623613774534154
    apm: [0.770430139547313914002540510081163800017336821479199508488452564388996252749623613774534154 +/- 5.75e-86]
 math53:  0.770430139547314
  sreal:  0.7704301
  dreal:  0.770430139547314
  ereal:  0.7704301395473139132
  qreal:  0.770430139547313914002540510081164
  oreal:  0.770430139547313914002540510081163800017336821479199508488452564388996252749623613774534154
  mreal:  0.770430139547313914002540510081163800017336821479199508488452564388996252749623613774534154
 sflint:  0.7704301
 dflint:  0.770430139547314
 eflint:  0.7704301395473139140 2
 qflint:  0.770430139547313914002540510081164
 oflint:  0.770430139547313914002540510081163800017336821479199508488452564388996252749623613774534112
 mflint:  0.770430139547313914002540510081163800017336821479199508488452564388996252749623613774534154
 aflint: [0.770430139547313914002540510081163800017336821479199508488452564388996252749623613774534154 +/- 3.19e-83]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  k = 2.7+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.jacobi_dc(x, k)))
    fpm:  (0.999989401961978, 0.000937879483221091)
    mpm:  (0.999989401961977650937030529809680698438799162086748661121605886341046483177241785033659694, 0.000937879483221090685058652367052654372437 9)
cmath53:  (0.999989401961969, 0.00093787948322266)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  k = 2.7+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.jacobi_dc(x, k))))
    fpm:  0.999989401961978
    mpm:  0.999989401961977650937030529809680698438799162086748661121605886341046483177241785033659694
    dpm:  0.999989401961977650937030529809680698438799162086748661121605886341046483177241785033659694
    gpm:  0.999989401961977650937030529809680698438799162086748661121605886341046483177241785033659694
    apm: [0.999989401961977650937030529809680698438799162086748661121605886341046483177241785034 +/- 6.27e-85]
cmath53:  0.999989401961969
sflintc:  0.9999894
dflintc:  0.999989401961978
eflintc:  0.99998940196197765094
qflintc:  0.999989401961977650937030529809681
oflintc:  0.99998940196197765093703052980968069843879916208674866112160588634105
mflintc:  0.999989401961977650937030529809680698438799162086748661121605886341046483177241785033659698
aflintc: [0.999989401961977650937030529809680698438799162086748661121605886341046483177241785 +/- 1.52e-82]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  k = 2.7+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.jacobi_dc(x, k))))
    fpm:  0.000937879483221091
    mpm:  0.000937879483221090685058652367052654372436148124969092982397148363326706328983137714125991120003
    dpm:  0.000937879483221090685058652367052654372436148124969092982397148363326706328983137714125991120003
    gpm:  0.000937879483221090685058652367052654372436148124969092982397148363326706328983137714125991120003
    apm: [0.000937879483221090685058652367052654372436148124969092982397148363326706328983137714 +/- 4.13e-85]
cmath53:  0.00093787948322266
sflintc:  0.000937889
dflintc:  0.000937879483221125
eflintc:  0.00093787948322109069338
qflintc:  0.000937879483221090685058652367052684
oflintc:  0.000937879483221090685058652367052654372436148124969092982397148363332670632898313771412599532
mflintc:  0.000937879483221090685058652367052654372436148124969092982397148363326706328983137714125991120003
aflintc: [0.000937879483221090685058652367052654372436148124969092982397148363326706328983138 +/- 4.04e-82]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

8.4.7 Jacobi elliptic function $\mathrm{nd}(x, k)$

`ctx.jacobi_nd`(x, k)

where `ctx` is `math53` or `ctxboost`.

Returns the Jacobi elliptic function $\mathrm{nd}(x, k) = 1/\mathrm{dn}(x, k)$. See also BoostMath [149], Wikipedia [1305], MathWorld [273], NIST [474], Ehrhardt [295] (3.2.11.7).

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; k = 2.7; gui.setdps(90)
>>> for ctx in gui.ctxlist_noipm_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.jacobi_nd(x, k)))
    fpm:  1.339255133362
    mpm:  1.339255133361999915806954930452280132768301981541679502433565636942286507302183565927839 58
    dpm:  1.339255133361999915806954930452280132768301981541679502433565636942286507302183565927839 58
    gpm:  1.339255133361999915806954930452280132768301981541679502433565636942286507302183565927839 5801
    apm: [1.339255133361999915806954930452280132768301981541679502433565636942286507302183565927 8 +/- 6.23e-86]
 math53:  1.339255133362
  sreal:  1.339255
  dreal:  1.339255133362
  ereal:  1.339255133361999917
  qreal:  1.339255133361999915806954930452 28
  oreal:  1.339255133361999915806954930452280132768301981541679502433565636942286 6
  mreal:  1.339255133361999915806954930452280132768301981541679502433565636942286507302183565927839 57
 sflint:  1.339255
 dflint:  1.339255133362
 eflint:  1.339255133361999915 8
 qflint:  1.339255133361999915806954930452 28
 oflint:  1.339255133361999915806954930452280132768301981541679502433565636942286 5
 mflint:  1.339255133361999915806954930452280132768301981541679502433565636942286507302183565927839 66
 aflint: [1.339255133361999915806954930452280132768301981541679502433565636942286507302183565 93 +/- 8.13e-84]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  k = 2.7+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.jacobi_nd(x, k)))
    fpm:  (-0.999926800907445, 0.000956421567057086)
    mpm:  (-0.999926800907444755959416646798240173995720946856839178131881128862313360096294454416847958, 0.000956421567057085914827744389197091555733 7)
cmath53:  (-0.999926800907446, 0.000956421567046943)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  k = 2.7+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.jacobi_nd(x, k))))
    fpm:  -0.999926800907445
    mpm:  -0.999926800907444755959416646798240173995720946856839178131881128862313360096294454416847958
    dpm:  -0.999926800907444755959416646798240173995720946856839178131881128862313360096294454416847958
    gpm:  -0.999926800907444755959416646798240173995720946856839178131881128862313360096294454416795802
    apm: [-0.999926800907444755959416646798240173995720946856839178131881128862313360096294454417 +/- 3.02e-85]
cmath53:  -0.999926800907446
sflintc:  -0.9999268
dflintc:  -0.999926800907445
eflintc:  -0.99992680090744475596
qflintc:  -0.999926800907444755959416646798 24
oflintc:  -0.999926800907444755959416646798240173995720946856839178131881128862 31
mflintc:  -0.999926800907444755959416646798240173995720946856839178131881128862313360096294454416847953
aflintc: [-0.999926800907444755959416646798240173995720946856839178131881128862313360096294454 4 +/- 7.39e-83]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  k = 2.7+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.jacobi_nd(x, k))))
    fpm:  0.000956421567057086
    mpm:  0.000956421567057085914827744389197091555732066186535024569472462037319965133848198518333626274
    dpm:  0.000956421567057085914827744389197091555732066186535024569472462037319965133848198518333626274
    gpm:  0.000956421567057085914827744389197091555732066186535024569472462037319965133848198518333626274 02
    apm: [0.000956421567057085914827744389197091555732066186535024569472462037319965133848198518 +/- 4.84e-85]
cmath53:  0.000956421567046943
sflintc:  0.0009564303
dflintc:  0.000956421567057117
eflintc:  0.00095642156705708592243
qflintc:  0.000956421567057085914827744389197119
oflintc:  0.000956421567057085914827744389197091555732066186535024569472462037 32
mflintc:  0.000956421567057085914827744389197091555732066186535024569472462037319965133848198518333630082
aflintc: [0.000956421567057085914827744389197091555732066186535024569472462037319965133848198 5 +/- 7.54e-83]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

8.4.8 Jacobi elliptic function $\mathrm{sd}(x, k)$

`ctx.jacobi_sd`(x, k)

where `ctx` is `math53` or `ctxboost`.

Returns the Jacobi elliptic function $\mathrm{sd}(x, k) = \mathrm{sn}(x, k)/\mathrm{dn}(x, k)$. See also BoostMath [156], Wikipedia [1305], MathWorld [276], NIST [474], Ehrhardt [295] (3.2.11.8).

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; k = 2.7; gui.setdps(90)
>>> for ctx in gui.ctxlist_noipm_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.jacobi_sd(x, k)))
    fpm:  0.329942488282845
    mpm:  0.32994248828284524304028027186301027043389689626190137362198388260682896852346340632215588601
    dpm:  0.32994248828284524304028027186301027043389689626190137362198388260682896852346340632215588601
    gpm:  0.32994248828284524304028027186301027043389689626190137362198388260682896852346340632215588601
    apm: [0.32994248828284524304028027186301027043389689626190137362198388260682896852346340632215588601 +/- 5.29e-86]
 math53:  0.329942488282845
  sreal:  0.3299425
  dreal:  0.329942488282845
  ereal:  0.3299424882828452437
  qreal:  0.32994248828284524304028027186301
  oreal:  0.32994248828284524304028027186301027043389689626190137362198388260682901
  mreal:  0.32994248828284524304028027186301027043389689626190137362198388260682896852346340632215588601
 sflint:  0.3299425
 dflint:  0.329942488282845
 eflint:  0.3299424882828452430402802718630102704338968962619013736219838826068289685234634063221559
 qflint:  0.32994248828284524304028027186301027043389689626190137362198388260682896852346340632215588601
 oflint:  0.3299424882828452430402802718630102704338968962619013736219838826068289685234634063221559
 mflint:  0.3299424882828452430402802718630102704338968962619013736219838826068289685234634063221559
 aflint: [0.32994248828284524304028027186301027043389689626190137362198388260682896852346340632215588601 +/- 4.94e-84]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  k = 2.7+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.jacobi_sd(x, k)))
    fpm:  (0.00142343916404814, -0.0129572836466517)
    mpm:  (0.0014234391640481385382828952495426890789717154160876267897731082055437318149734181980090076789
cmath53:  (0.00142343916404041, -0.0129572836466502)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  k = 2.7+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.jacobi_sd(x, k))))
    fpm:  0.00142343916404814
    mpm:  0.00142343916404813853828289524954268907897171541608762678977310820554373181497341819800907679
    dpm:  0.00142343916404813853828289524954268907897171541608762678977310820554373181497341819800907679
    gpm:  0.00142343916404813853828289524954268907897171541608762678977310820554373181497341819800907679
    apm: [0.00142343916404813853828289524954268907897171541608762678977310820554373181497341819800907679 +/- 2.16e-86]
cmath53:  0.00142343916404041
sflintc:  0.001423373
dflintc:  0.0014234391640479
eflintc:  0.00142343916404813847920
qflintc:  0.0014234391640481385382828952495424 8
oflintc:  0.00142343916404813853828289524954268907897171541608762678977310820554373181497341819800907679
mflintc:  0.00142343916404813853828289524954268907897171541608762678977310820554373181497341819800907679
aflintc: [0.00142343916404813853828289524954268907897171541608762678977310820554373181497341819800907679 +/- 5.55e-84]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  k = 2.7+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.jacobi_sd(x, k))))
    fpm:  -0.0129572836466517
    mpm:  -0.012957283646651736337545145560322618438225312593331699775339061178677288410742651445431272 6
    dpm:  -0.012957283646651736337545145560322618438225312593331699775339061178677288410742651445431272 6
    gpm:  -0.012957283646651736337545145560322618438225312593331699775339061178677288410742651445431272601
    apm: [-0.012957283646651736337545145560322618438225312593331699775339061178677288410742651445 4 +/- 4.38e-86]
cmath53:  -0.0129572836466502
sflintc:  -0.01295736
dflintc:  -0.012957283646652
eflintc:  -0.012957283646651736402
qflintc:  -0.012957283646651736337545145560322 8
oflintc:  -0.012957283646651736337545145560322618438225312593331699775339061178677
mflintc:  -0.012957283646651736337545145560322618438225312593331699775339061178677288410742651445431301
aflintc: [-0.012957283646651736337545145560322618438225312593331699775339061178677288410742651 5 +/- 8.12e-84]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

8.4.9 Jacobi elliptic function $\mathrm{cd}(x, k)$

`ctx.jacobi_cd`(x, k)

where `ctx` is `math53` or `ctxboost`.

Returns the Jacobi elliptic function $\mathrm{cd}(x, k) = \mathrm{cn}(x, k)/\mathrm{dn}(x, k)$. See also BoostMath [142], Wikipedia [1305], MathWorld [266], NIST [474], Ehrhardt [295] (3.2.11.9).

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; k = 2.7; gui.setdps(90)
>>> for ctx in gui.ctxlist_noipm_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.jacobi_cd(x, k)))
    fpm:  1.29797621960581
    mpm:  1.29797621960581107921236513233122261291203306302524162230835090732884210180940004422198266
    dpm:  1.29797621960581107921236513233122261291203306302524162230835090732884210180940004422198266
    gpm:  1.29797621960581107921236513233122261291203306302524162230835090732884210180940004422198265 99
    apm: [1.29797621960581107921236513233122261291203306302524162230835090732884210180940004422 0 +/- 5.66e-86]
 math53:  1.29797621960581
  sreal:  1.297976
  dreal:  1.29797621960581
  ereal:  1.2979762196058110805
  qreal:  1.29797621960581107921236513233122
  oreal:  1.29797621960581107921236513233122261291203306302524162230835090732884 2
  mreal:  1.29797621960581107921236513233122261291203306302524162230835090732884210180940004422198265
 sflint:  1.297976
 dflint:  1.29797621960581
 eflint:  1.2979762196058110792
 qflint:  1.29797621960581107921236513233122
 oflint:  1.29797621960581107921236513233122261291203306302524162230835090732884 2
 mflint:  1.29797621960581107921236513233122261291203306302524162230835090732884210180940004422198273
 aflint: [1.29797621960581107921236513233122261291203306302524162230835090732884210180940004 4 +/- 3.27e-83]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  k = 2.7+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.jacobi_cd(x, k)))
    fpm:  (1.00000971850522, -0.000937898537892113)
    mpm:  (1.0000097185052234048695508203401533356435632727648390420653310010217073212945301569795485, -0.000937898537892112979694925386453457626299 6)
cmath53:  (1.00000971850523, -0.000937898537893714)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  k = 2.7+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.jacobi_cd(x, k))))
    fpm:  1.00000971850522
    mpm:  1.0000097185052234048695508203401533356435632727648390420653310010217073212945301569795485
    dpm:  1.0000097185052234048695508203401533356435632727648390420653310010217073212945301569795485
    gpm:  1.0000097185052234048695508203401533356435632727648390420653310010217073212945301569795484 99
    apm: [1.0000097185052234048695508203401533356435632727648390420653310010217073212945301569 8 +/- 3.32e-85]
cmath53:  1.00000971850523
sflintc:  1.00001
dflintc:  1.00000971850522
eflintc:  1.0000097185052234048
qflintc:  1.000009718505223404869550820340 5
oflintc:  1.000009718505223404869550820340153335643556327276483904206533100102 7
mflintc:  1.0000097185052234048695508203401533356435632727648390420653310010217073212945301569795484
aflintc: [1.000009718505223404869550820340153335643556327276483904206533100102170732129453016 +/- 4.20e-82]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  k = 2.7+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.jacobi_cd(x, k))))
    fpm:  -0.000937898537892113
    mpm:  -0.000937898537892112979694925386453457626297786033495630557524697596842405323750135037460240752
    dpm:  -0.000937898537892112979694925386453457626297786033495630557524697596842405323750135037460240752
    gpm:  -0.000937898537892112979694925386453457626297786033495630557524697596842405323750135037460240075196
    apm: [-0.000937898537892112979694925386453457626297786033495630557524697596842405323750135037 +/- 7.47e-85]
cmath53:  -0.000937898537893714
sflintc:  -0.000937908
dflintc:  -0.000937898537892147
eflintc:  -0.00093789853789211298798
qflintc:  -0.000937898537892112979694925386453487
oflintc:  -0.000937898537892112979694925386453457626297786033495630557524697596842
mflintc:  -0.000937898537892112979694925386453457626297786033495630557524697596842405323750135037460244943
aflintc: [-0.000937898537892112979694925386453457626297786033495630557524697596842405323750135 +/- 1.56e-82]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

8.4.10 Jacobi elliptic function $\mathrm{ns}(x, k)$

`ctx.jacobi_ns`(x, k)

where `ctx` is `math53` or `ctxboost`.

Returns the Jacobi elliptic function $\mathrm{ns}(x, k) = 1/\mathrm{sn}(x, k)$. See also BoostMath [150], Wikipedia [1305], MathWorld [274], NIST [474], Ehrhardt [295] (3.2.11.10).

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; k = 2.7; gui.setdps(90)
>>> for ctx in gui.ctxlist_noipm_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.jacobi_ns(x, k)))
    fpm:  4.05905629290737
    mpm:  4.059056292907372245205928617110937428094223917169974186928891315325002728448632247873420 39
    dpm:  4.059056292907372245205928617110937428094223917169974186928891315325002728448632247873420 39
    gpm:  4.059056292907372245205928617110937428094223917169974186928891315325002728448632247873420 3899
    apm: [4.059056292907372245205928617110937428094223917169974186928891315325002728448632247873 4 +/- 5.88e-86]
 math53:  4.05905629290737
  sreal:  4.059056
  dreal:  4.05905629290737
  ereal:  4.0590562929073722405
  qreal:  4.059056292907372245205928617110 94
  oreal:  4.059056292907372245205928617110937428094223917169974186928891315325002 5
  mreal:  4.059056292907372245205928617110937428094223917169974186928891315325002728448632247873420 41
 sflint:  4.059056
 dflint:  4.05905629290737
 eflint:  4.0590562929073722453
 qflint:  4.059056292907372245205928617110 94
 oflint:  4.059056292907372245205928617110937428094223917169974186928891315325002 7
 mflint:  4.059056292907372245205928617110937428094223917169974186928891315325002728448632247873420 08
 aflint: [4.059056292907372245205928617110937428094223917169974186928891315325002 7284486322479 +/- 4.28e-83]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  k = 2.7+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.jacobi_ns(x, k)))
    fpm:  (-8.44956300141373, -76.2427827430807)
    mpm:  (-8.449563001413728865924406112654300964258, -76.242782743080665390501217752174931907 18)
cmath53:  (-8.44956300137055, -76.2427827430997)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  k = 2.7+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.jacobi_ns(x, k))))
    fpm:  -8.44956300141373
    mpm:  -8.449563001413728865924406112654300964346944710860509310816203801865233364431081467301462 71
    dpm:  -8.449563001413728865924406112654300964346944710860509310816203801865233364431081467301462 71
    gpm:  -8.449563001413728865924406112654300964346944710860509310816203801865233364431081467301462 7098
    apm: [-8.449563001413728865924406112654300964346944710860509310816203801865233364431081467301462 7673 +/- 7.50e-83]
cmath53:  -8.44956300137055
sflintc:  -8.449093
dflintc:  -8.44956300141201
eflintc:  -8.449563001413728445
qflintc:  -8.449563001413728865924406112652 81
oflintc:  -8.449563001413728865924406112654300964346944710860509310816203801865
mflintc:  -8.449563001413728865924406112654300964346944710860509310816203801865233364431081467301297 06
aflintc: [-8.449563001413728865924406112654300964346944710860509310816203801865233364431081 5 +/- 5.21e-80]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  k = 2.7+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.jacobi_ns(x, k))))
    fpm:  -76.2427827430807
    mpm:  -76.24278274308066539050121775217493190724478617185480275087177134591123155701790478420666 46
    dpm:  -76.24278274308066539050121775217493190724478617185480275087177134591123155701790478420666 46
    gpm:  -76.24278274308066539050121775217493190724478617185480275087177134591123155701790478420666 4602
    apm: [-76.24278274308066539050121775217493190724478617185480275087177134591123155701790478420666 4602 +/- 8.02e-83]
cmath53:  -76.2427827430997
sflintc:  -76.24245
dflintc:  -76.2427827430795
eflintc:  -76.24278274308066 5102
qflintc:  -76.24278274308066539050121775217 39
oflintc:  -76.24278274308066539050121775217493190724478617185480275087177134591 1
mflintc:  -76.24278274308066539050121775217493190724478617185480275087177134591123155701790478420652 95
aflintc: [-76.24278274308066539050121775217493190724478617185480275087177134591123155701790 48 +/- 3.52e-80]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

8.4.11 Jacobi elliptic function $\mathrm{cs}(x, k)$

`ctx.jacobi_cs`(x, k)

where `ctx` is `math53` or `ctxboost`.

Returns the Jacobi elliptic function $\mathrm{cs}(x, k) = \mathrm{cn}(x, k)/\mathrm{sn}(x, k)$. See also BoostMath [144], Wikipedia [1305], MathWorld [268], NIST [474], Ehrhardt [295] (3.2.11.11).

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; k = 2.7; gui.setdps(90)
>>> for ctx in gui.ctxlist_noipm_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.jacobi_cs(x, k)))
    fpm:  3.93394687165332
    mpm:  3.933946871653319533045503699315881242254630825110523912962078376233162151057370990928711 94
    dpm:  3.933946871653319533045503699315881242254630825110523912962078376233162151057370990928711 94
    gpm:  3.933946871653319533045503699315881242254630825110523912962078376233162151057370990928711 94
    apm: [3.933946871653319533045503699315881242254630825110523912962078376233162151057370990929 +/- 3.78e-85]
 math53:  3.93394687165332
  sreal:  3.933947
  dreal:  3.93394687165332
  ereal:  3.9339468716533195292
  qreal:  3.933946871653319533045503699315 89
  oreal:  3.933946871653319533045503699315881242254630825110523912962078376233 1618
  mreal:  3.933946871653319533045503699315881242254630825110523912962078376233162151057370990928711 96
 sflint:  3.933947
 dflint:  3.93394687165332
 eflint:  3.9339468716533195331
 qflint:  3.933946871653319533045503699315 88
 oflint:  3.933946871653319533045503699315881242254630825110523912962078376233 1622
 mflint:  3.933946871653319533045503699315881242254630825110523912962078376233162151057370990928711 61
 aflint: [3.933946871653319533045503699315881242254630825110523912962078376233162151057370990 9 +/- 5.92e-83]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  k = 2.7+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.jacobi_cs(x, k)))
    fpm:  (8.44884512318457, 76.2492609105773)
    mpm:  (8.448845123184572888950086660025145690217, 76.249260910577348822669592025572310021 41)
cmath53:  (8.44884512314235, 76.2492609105969)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  k = 2.7+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.jacobi_cs(x, k))))
    fpm:  8.44884512318457
    mpm:  8.448845123184572888950086660025145690305763634917273184459042763649960739360650710 81800078
    dpm:  8.448845123184572888950086660025145690305763634917273184459042763649960739360650710 81800078
    gpm:  8.448845123184572888950086660025145690305763634917273184459042763649960739360650710 81800078 01
    apm: [8.448845123184572888950086660025145690305763634917273184459042763649960739360650711 +/- 2.68e-82]
cmath53:  8.44884512314235
sflintc:  8.448375
dflintc:  8.44884512318285
eflintc:  8.4488451231845724679
qflintc:  8.448845123184572888950086660023 65
oflintc:  8.448845123184572888950086660025145690305763634917273184459042763 65
mflintc:  8.448845123184572888950086660025145690305763634917273184459042763649960739360650710 81783514
aflintc: [8.448845123184572888950086660025145690305763634917273184459042763649960739360650 7 +/- 3.54e-80]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  k = 2.7+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.jacobi_cs(x, k))))
    fpm:  76.2492609105773
    mpm:  76.24926091057734882266959202557231002147062061782485586001142029484150140909153824853600 34
    dpm:  76.24926091057734882266959202557231002147062061782485586001142029484150140909153824853600 34
    gpm:  76.24926091057734882266959202557231002147062061782485586001142029484150140909153824853600 3393
    apm: [76.24926091057734882266959202557231002147062061782485586001142029484150140909153824853600 3249 +/- 5.50e-82]
cmath53:  76.2492609105969
sflintc:  76.24893
dflintc:  76.2492609105762
eflintc:  76.249260910577348532
qflintc:  76.24926091057734882266959202557 13
oflintc:  76.24926091057734882266959202557231002147062061782485586001142029484
mflintc:  76.24926091057734882266959202557231002147062061782485586001142029484150140909153824853586 82
aflintc: [76.24926091057734882266959202557231002147062061782485586001142029484150140909153824 +/- 7.31e-80]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

8.4.12 Jacobi elliptic function $\mathrm{ds}(x, k)$

`ctx.jacobi_ds`(x, k)

where `ctx` is `math53` or `ctxboost`.

Returns the Jacobi elliptic function $\mathrm{ds}(x, k) = \mathrm{dn}(x, k)/\mathrm{sn}(x, k)$. See also BoostMath [147], Wikipedia [1305], MathWorld [271], NIST [474], Ehrhardt [295] (3.2.11.12).

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; k = 2.7; gui.setdps(90)
>>> for ctx in gui.ctxlist_noipm_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.jacobi_ds(x, k)))
    fpm:  3.03083123729959
    mpm:  3.03083123729958598745829070479893361212837724818300643486395269157289361108401193506219445
    dpm:  3.03083123729958598745829070479893361212837724818300643486395269157289361108401193506219445
    gpm:  3.03083123729958598745829070479893361212837724818300643486395269157289361108401193506219445
    apm: [3.03083123729958598745829070479893361212837724818300643486395269157289361108401193506219445 +/- 8.56e-86]
 math53:  3.03083123729959
  sreal:  3.030831
  dreal:  3.03083123729959
  ereal:  3.0308312372995859815
  qreal:  3.03083123729958598745829070479894
  oreal:  3.03083123729958598745829070479893361212837724818300643486395269157289333
  mreal:  3.03083123729958598745829070479893361212837724818300643486395269157289361108401193506219447
 sflint:  3.030831
 dflint:  3.03083123729959
 eflint:  3.0308312372995859876
 qflint:  3.03083123729958598745829070479893
 oflint:  3.030831237299585987458290704798933612128377248183006434863952691572893611084011935062194036
 mflint:  3.03083123729958598745829070479893361212837724818300643486395269157289361108401193506219403
 aflint: [3.03083123729958598745829070479893361212837724818300643486395269157289361108401193506219403 +/- 6.34e-83]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  k = 2.7+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.jacobi_ds(x, k)))
    fpm:  (8.37724296458391, 76.256376816509)
    mpm:  (8.377242964583910045918666958996255296959, 76.256376816508989889282267717919557570037)
cmath53:  (8.37724296454147, 76.2563768165278)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  k = 2.7+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.jacobi_ds(x, k))))
    fpm:  8.37724296458391
    mpm:  8.377242964583910045918666958996255297048558044475016176282316254087593071424554324319361644
    dpm:  8.377242964583910045918666958996255297048558044475016176282316254087593071424554324319361644
    gpm:  8.377242964583910045918666958996255297048558044475016176282316254087593071424554324319361644
    apm: [8.377242964583910045918666958996255297048558044475016176282316254087593071424554324 +/- 4.06e-82]
cmath53:  8.37724296454147
sflintc:  8.376772
dflintc:  8.37724296458219
eflintc:  8.3772429645839096247
qflintc:  8.377242964583910045918666958994765
oflintc:  8.37724296458391004591866695899625529704855804447501617628231625409
mflintc:  8.377242964583910045918666958996255297048558044475016176282316254087593071424554324319195845
aflintc: [8.377242964583910045918666958996255297048558044475016176282316254087593071424554324 +/- 4.86e-80]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j;  k = 2.7+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.jacobi_ds(x, k))))
    fpm:  76.256376816509
    mpm:  76.256376816508989889282267717919557570430694347502083897805473120382186412533337455137719705
    dpm:  76.256376816508989889282267717919557570430694347502083897805473120382186412533337455137719705
    gpm:  76.256376816508989889282267717919557570430694347502083897805473120382186412533337455137719705
    apm: [76.256376816508989889282267717919557570430694347502083897805473120382186412533337455 +/- 2.24e-82]
cmath53:  76.2563768165278
sflintc:  76.25604
dflintc:  76.2563768165078
eflintc:  76.25637681650898601
qflintc:  76.256376816508989889282267717919 5
oflintc:  76.256376816508989889282267717919557570430694347502083897805473120382
mflintc:  76.256376816508989889282267717919557570430694347502083897805473120382186412533337455137571 8
aflintc: [76.256376816508989889282267717919557570430694347502083897805473120382186412533337 +/- 6.91e-80]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

8.5 Jacobi theta functions and related functions

The theta functions are functions of two variables:

- z is the *argument*, an arbitrary real or complex number
- q is the *nome*, which must be a real or complex number in the unit disk (i.e. $|q| < 1$). For $|q| \ll 1$, the series converge very quickly, so the Jacobi theta functions can efficiently be evaluated to high precision.

The compact notations $\theta_n(q) = \theta_n(0, q)$ and $\theta_n = \theta_n(0, q)$ are also frequently encountered. Finally, Jacobi theta functions are frequently considered as functions of the half-period ratio τ and then usually denoted by $\theta_n(z|\tau)$.

8.5.1 Jacobi theta function $\theta_1(z, q)$

`ctx.jacobi_theta1`(x, q)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns the Jacobi theta function $\theta_1(z, q) = 2q^{1/4} \sum_{n=0}^{\infty} (-1)^n q^{n^2+n} \sin((2n+1)z)$

Note: the Amath version needs to be adapted.

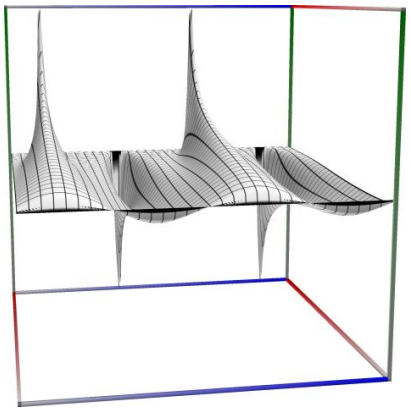

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

See also Wikipedia [1312], MathWorld [960], MathWorld [278], NIST [476], Ehrhardt [295] (3.2.13), Flint [748].

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -1.5; q = 0.5; gui.setdps(90)
>>> for ctx in gui.ctxlist_noipm_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.jacobi_theta1(x, q)))
    fpm:  -2.11359196642346
    mpm:  -2.11359196642346138066904857916181790184266045594995231683646916266980968688255037484693934
    dpm:  -2.11359196642346138066904857916181790184266045594995231683646916266980968688255037484693934
    gpm:  -2.11359196642346138066904857916181790184266045594995231683646916266980968688255037484693934
    apm: [-2.11359196642346138066904857916181790184266045594995231683646916266980968688255037484693934 +/- 7.76e-89]
 math53:  -2.11359196642346
  sreal:  -2.113592
  dreal:  -2.11359196642346
  ereal:  -2.1135919664234613807
  qreal:  -2.11359196642346138066904857916182
  oreal:  -2.11359196642346138066904857916181790184266045594995231683646916266980968
  mreal:  -2.11359196642346138066904857916181790184266045594995231683646916266980968688255037484693934
 sflint:  -2.113592
 dflint:  -2.11359196642346
```

(continues on next page)

(continued from previous page)

```
 eflint:  -2.1135919664234613807
 qflint:  -2.113591966423461380669048579161817901842660455949952316836469162669809686882550374846939 +/- 4.90e-88]
 oflint:  -2.1135919664234613806690485791618179018426604559499523168364691626698097
 mflint:  -2.113591966423461380669048579161817901842660455949952316836469162669809686882550374846939 33
 aflint: [-2.113591966423461380669048579161817901842660455949952316836469162669809686882550374846939 +/- 4.90e-88]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = 1.0+2j;  q = 0.5+0.2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.jacobi_theta1(x, q)))
    fpm:  (-50.780836605528, 124.989381403456)
    mpm:  (-50.78083660552799331037816040836444156409, 124.98938140345563496151153470459065439119346296625135014399340479808554065848248717964902)
cmath53:  (-50.7808366055273, 124.989381403456)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = 1.0+2j;  q = 0.5+0.2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.jacobi_theta1(x, q))))
    fpm:  -50.780836605528
    mpm:  -50.78083660552799331037816040836444156408946046391700415827830809268669656076192069451205 48
    dpm:  -50.78083660552799331037816040836444156408946046391700415827830809268669656076192069451205 48
    gpm:  -50.78083660552799331037816040836444156408946046391700415827830809268669656076192069451205 4802
    apm: [-50.78083660552799331037816040836444156408946046391700415827830809268669656076192069451205 121 +/- 5.76e-86]
cmath53:  -50.7808366055273
sflintc:  -50.78085
dflintc:  -50.7808366055281
eflintc:  -50.780836605527993326
qflintc:  -50.78083660552799331037816040836445
oflintc:  -50.7808366055279933103781604083645699
mflintc:  -50.78083660552799331037816040836444156408946046391700415827830809268669656076192069451205 44
aflintc: [-50.78083660552799331037816040836444156408946046391700415827830809268669656076192069451205 121 +/- 9.10e-86]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = 1.0+2j;  q = 0.5+0.2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.jacobi_theta1(x, q))))
    fpm:  124.989381403456
    mpm:  124.98938140345563496151153470459065439119346296625135014399340479808554065848248717964902 1
    dpm:  124.98938140345563496151153470459065439119346296625135014399340479808554065848248717964902 1
    gpm:  124.98938140345563496151153470459065439119346296625135014399340479808554065848248717964902 101
    apm: [124.98938140345563496151153470459065439119346296625135014399340479808554065848248717964902 490 +/- 3.23e-86]
cmath53:  124.989381403456
sflintc:  124.9894
dflintc:  124.989381403456
eflintc:  124.98938140345563497
qflintc:  124.98938140345563496151153470459 1
oflintc:  124.98938140345563496151153470459065439119346296625135014399340479808554
mflintc:  124.98938140345563496151153470459065439119346296625135014399340479808554065848248717964902
aflintc: [124.98938140345563496151153470459065439119346296625135014399340479808554065848248717964902 490 +/- 6.51e-86]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

8.5.2 Jacobi theta function $\theta_2(z, q)$

`ctx.jacobi_theta2`(x, q)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns the Jacobi theta function $\theta_2(z,q) = 2q^{1/4}\sum_{n=0}^{\infty} q^{n^2+n}\cos((2n+1)z)$

Note: the Amath version needs to be adapted.

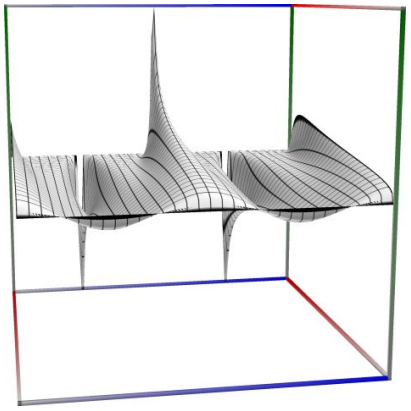

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

See also Wikipedia [1312], MathWorld [960], MathWorld [278], NIST [476], Ehrhardt [295] (3.2.13), Flint [748].

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -1.5; q = 0.5; gui.setdps(90)
>>> for ctx in gui.ctxlist_noipm_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.jacobi_theta2(x, q)))
    fpm:  0.0392511904453161
    mpm:  0.039251190445316054124109073728595204384282524784191963180369798389612704284712838888734691399
    dpm:  0.039251190445316054124109073728595204384282524784191963180369798389612704284712838888734691399
    gpm:  0.039251190445316054124109073728595204384282524784191963180369798389612704284712838888734691399
    apm: [0.039251190445316054124109073728595204384282524784191963180369798389612704284712838888734691399 +/- 3.05e-90]
 math53:  0.039251190445316
  sreal:  0.03925122
  dreal:  0.039251190445316
  ereal:  0.039251190445316054144
  qreal:  0.039251190445316054124109073728595204384282524784191963180369798389612703
  oreal:  0.039251190445316054124109073728595204384282524784191963180369798389612703
  mreal:  0.039251190445316054124109073728595204384282524784191963180369798389612704284712838888734691399
 sflint:  0.03925119
 dflint:  0.0392511904453161
 eflint:  0.039251190445316054124
 qflint:  0.039251190445316054124109073728595204384282524784191963180369798389612703
 oflint:  0.039251190445316054124109073728595204384282524784191963180369798389612704
 mflint:  0.039251190445316054124109073728595204384282524784191963180369798389612704284712838888734691399
 aflint: [0.039251190445316054124109073728595204384282524784191963180369798389612704284712838888734691399 +/- 9.18e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = 1.0+2j;  q = 0.5+0.2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.jacobi_theta2(x, q)))
    fpm:  (-788.730030824563, -973.103865381616)
    mpm:  (-788.730030824562882021701528729479717359, -973.103865381615591734307587479389735773 77)
cmath53:  (-788.730030824566, -973.103865381615)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = 1.0+2j;  q = 0.5+0.2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.jacobi_theta2(x, q))))
    fpm:  -788.730030824563
    mpm:  -788.730030824562882021701528729479717359057533221038303968344425731569663005345603872930402
    dpm:  -788.730030824562882021701528729479717359057533221038303968344425731569663005345603872930402
    gpm:  -788.7300308245628820217015287294797173590575332210383039683444257315696630053456038729304020 4
    apm: [-788.730030824562882021701528729479717359057533221038303968344425731569663005345603872930 4 +/- 3.73e-86]
cmath53:  -788.730030824566
sflintc:  -788.73
dflintc:  -788.730030824563
eflintc:  -788.73003082456288199
qflintc:  -788.730030824562882021701528729 48
oflintc:  -788.730030824562882021701528729479717359057533221038303968344425731569663 5
mflintc:  -788.730030824562882021701528729479717359057533221038303968344425731569663005345603872930394
aflintc: [-788.730030824562882021701528729479717359057533221038303968344425731569663005345603872930 +/- 5.33e-85]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = 1.0+2j;  q = 0.5+0.2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.jacobi_theta2(x, q))))
    fpm:  -973.103865381616
    mpm:  -973.10386538161559734307587479389735773769578378914415817427042407837738055394536663328852 2
    dpm:  -973.10386538161559734307587479389735773769578378914415817427042407837738055394536663328852 2
    gpm:  -973.10386538161559734307587479389735773769578378914415817427042407837738055394536663328852196
    apm: [-973.10386538161559734307587479389735773769578378914415817427042407837738055394536663328852 +/- 5.46e-86]
cmath53:  -973.103865381615
sflintc:  -973.1039
dflintc:  -973.103865381616
eflintc:  -973.10386538161559739
qflintc:  -973.1038653816155973430758747938973577376957837891441581742704240783773805539453666332885
oflintc:  -973.10386538161559734307587479389735773769578378914415817427042407837739
mflintc:  -973.10386538161559734307587479389735773769578378914415817427042407837738055394536663328851 4
aflintc: [-973.10386538161559734307587479389735773769578378914415817427042407837738055394536663328 9 +/- 6.22e-85]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

8.5.3 Jacobi theta function $\theta_3(z, q)$

`ctx.jacobi_theta3`(x, q)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns the Jacobi theta function $\theta_3(z,q) = 1 + 2\sum_{n=1}^{\infty} q^{n^2} \cos(2nz)$

Note: the Amath version needs to be adapted.

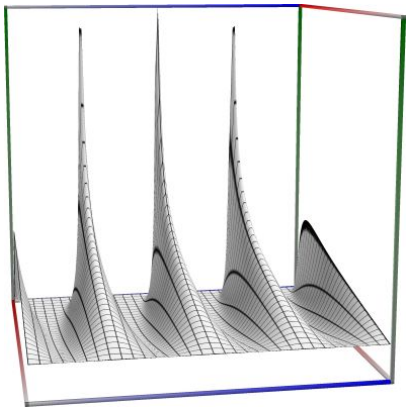

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

See also Wikipedia [1312], MathWorld [960], MathWorld [278], NIST [476], Ehrhardt [295] (3.2.13), Flint [748].

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -1.5; q = 0.5; gui.setdps(90)
>>> for ctx in gui.ctxlist_noipm_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.jacobi_theta3(x, q)))
    fpm:  0.126495393762763
    mpm:  0.126495393762762598701888433352100380638483071560362656246275916619695793139049359803626692
    dpm:  0.126495393762762598701888433352100380638483071560362656246275916619695793139049359803626692
    gpm:  0.126495393762762598701888433352100380638483071560362656246275916619695793139049359803626692
    apm: [0.126495393762762598701888433352100380638483071560362656246275916619695793139049359803626669 +/- 3.48e-90]
 math53:  0.126495393762763
  sreal:  0.1264954
  dreal:  0.126495393762763
  ereal:  0.12649539376276259869
  qreal:  0.126495393762762598701888433521
  oreal:  0.126495393762762598701888433352100380638483071560362656246275916619695791
  mreal:  0.126495393762762598701888433352100380638483071560362656246275916619695793139049359803626691
 sflint:  0.1264954
 dflint:  0.126495393762763
 eflint:  0.12649539376276259870
 qflint:  0.126495393762762598701888433521
 oflint:  0.126495393762762598701888433352100380638483071560362656246275916619695793139049359803626691
 mflint:  0.126495393762762598701888433352100380638483071560362656246275916619695793139049359803626691
 aflint: [0.126495393762762598701888433352100380638483071560362656246275916619695793139049359803626691 +/- 1.82e-89]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = 1.0+2j;  q = 0.5+0.2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.jacobi_theta3(x, q)))
    fpm:  (-788.853981893901, -973.061264832878)
    mpm:  (-788.8539818939012432600295903235863318626, -973.06126483287786328476697098400116751127)
cmath53:  (-788.853981893904, -973.061264832879)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = 1.0+2j;  q = 0.5+0.2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.jacobi_theta3(x, q))))
    fpm:  -788.853981893901
    mpm:  -788.85398189390124326002959032358633186257255892408590276823580152021001645359398707897137 9
    dpm:  -788.85398189390124326002959032358633186257255892408590276823580152021001645359398707897137 9
    gpm:  -788.85398189390124326002959032358633186257255892408590276823580152021001645359398707897137906
    apm: [-788.85398189390124326002959032358633186257255892408590276823580152021001645359398707897 14 +/- 6.04e-86]
cmath53:  -788.853981893904
sflintc:  -788.8539
dflintc:  -788.853981893901
eflintc:  -788.85398189390124324
qflintc:  -788.85398189390124326002959032 3586
oflintc:  -788.85398189390124326002959032358633186257255892408590276823580152021001
mflintc:  -788.85398189390124326002959032358633186257255892408590276823580152021001645359398707897137 1
aflintc: [-788.85398189390124326002959032358633186257255892408590276823580152021001645359398707897 1 +/- 5.11e-85]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = 1.0+2j;  q = 0.5+0.2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.jacobi_theta3(x, q))))
    fpm:  -973.061264832878
    mpm:  -973.06126483287786328476697098400116751267224657889666270168982813238510108538905157337737 6
    dpm:  -973.06126483287786328476697098400116751267224657889666270168982813238510108538905157337737 6
    gpm:  -973.06126483287786328476697098400116751267224657889666270168982813238510108538905157337737601
    apm: [-973.06126483287786328476697098400116751267224657889666270168982813238510108538905157337737 4 +/- 6.32e-86]
cmath53:  -973.061264832879
sflintc:  -973.0613
dflintc:  -973.061264832878
eflintc:  -973.06126483287786333
qflintc:  -973.06126483287786328476697098400 1
oflintc:  -973.06126483287786328476697098400116751267224657889666270168982813238511
mflintc:  -973.06126483287786328476697098400116751267224657889666270168982813238510108538905157337737 8
aflintc: [-973.06126483287786328476697098400116751267224657889666270168982813238510108538905157337737 +/- 5.05e-85]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

8.5.4 Jacobi theta function $\theta_4(z, q)$

`ctx.jacobi_theta4`(x, q)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns the Jacobi theta function $\theta_4(z,q) = 1 + 2\sum_{n=1}^{\infty}(-q)^{n^2}\cos(2nz)$

Note: the Amath version needs to be adapted.

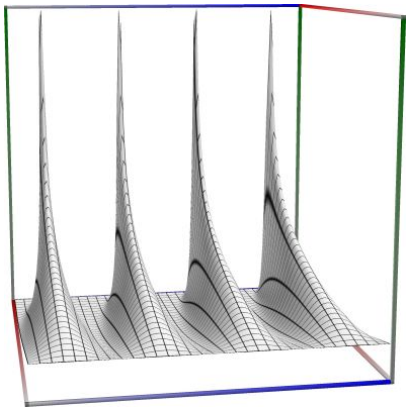

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

See also Wikipedia [1312], MathWorld [960], MathWorld [278], NIST [476], Ehrhardt [295] (3.2.13), Flint [748].

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -1.5; q = 0.5; gui.setdps(90)
>>> for ctx in gui.ctxlist_noipm_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.jacobi_theta4(x, q)))
    fpm:  2.11359868269649
    mpm:  2.11359868269648781628303165240842491940069427464811703149818811558563778179460529781768584
    dpm:  2.11359868269648781628303165240842491940069427464811703149818811558563778179460529781768584
    gpm:  2.11359868269648781628303165240842491940069427464811703149818811558563778179460529781768584
    apm: [2.11359868269648781628303165240842491940069427464811703149818811558563778179460529781768584 +/- 7.57e-89]
 math53:  2.11359868269649
  sreal:  2.113599
  dreal:  2.11359868269649
  ereal:  2.1135986826964878163
  qreal:  2.113598682696487816283031652408424
  oreal:  2.11359868269648781628303165240842491940069427464811703149818811558563778
  mreal:  2.11359868269648781628303165240842491940069427464811703149818811558563778179460529781768584
 sflint:  2.113599
 dflint:  2.11359868269649
 eflint:  2.1135986826964878163
 qflint:  2.113598682696487816283031652408424
 oflint:  2.11359868269648781628303165240842491940069427464811703149818811558563778
 mflint:  2.11359868269648781628303165240842491940069427464811703149818811558563778179460529781768583
 aflint: [2.11359868269648781628303165240842491940069427464811703149818811558563778179460529781768584 +/- 3.37e-88]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = 1.0+2j;  q = 0.5+0.2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.jacobi_theta4(x, q)))
    fpm:  (97.0420581423974, -162.552773270404)
    mpm:  (97.042058142397440709362370599559720788898, -162.552773270403840908163368385259117590 2)
cmath53:  (97.0420581423972, -162.552773270404)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = 1.0+2j;  q = 0.5+0.2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.jacobi_theta4(x, q))))
    fpm:  97.0420581423974
    mpm:  97.042058142397440709362370599559720788978439412289873197112857017775552800407137678375454201
    dpm:  97.042058142397440709362370599559720788978439412289873197112857017775552800407137678375454201
    gpm:  97.042058142397440709362370599559720788978439412289873197112857017775552800407137678375454201
    apm: [97.042058142397440709362370599559720788978439412289873197112857017775552800407137678375 +/- 6.04e-86]
cmath53:  97.0420581423972
sflintc:  97.04208
dflintc:  97.0420581423975
eflintc:  97.042058142397440726
qflintc:  97.042058142397440709362370599559 8
oflintc:  97.042058142397440709362370599559720788978439412289873197112857017775555
mflintc:  97.042058142397440709362370599559720788978439412289873197112857017775552800407137678375453 2
aflintc: [97.042058142397440709362370599559720788978439412289873197112857017775552800407137678375 +/- 5.07e-85]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = 1.0+2j;  q = 0.5+0.2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.jacobi_theta4(x, q))))
    fpm:  -162.552773270404
    mpm:  -162.552773270403840908163368385259117590182379208164746903702433461088193073238559000409487
    dpm:  -162.552773270403840908163368385259117590182379208164746903702433461088193073238559000409487
    gpm:  -162.552773270403840908163368385259117590182379208164746903702433461088193073238559000409487
    apm: [-162.552773270403840908163368385259117590182379208164746903702433461088193073238559000409487 +/- 2.86e-86]
cmath53:  -162.552773270404
sflintc:  -162.5528
dflintc:  -162.552773270404
eflintc:  -162.55277327040384092
qflintc:  -162.552773270403840908163368385259
oflintc:  -162.552773270403840908163368385259117590182379208164746903702433461088193
mflintc:  -162.552773270403840908163368385259117590182379208164746903702433461088193073238559000409485
aflintc: [-162.552773270403840908163368385259117590182379208164746903702433461088193073238559000409485 +/- 6.86e-86]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

8.6 Weierstrass elliptic functions, in terms of elliptic period ratio τ

8.6.1 Weierstrass function $\wp(z|\tau)$

ctx.weierstrass_p_t(*z*, *tau*)

Computes Weierstrass's elliptic function in terms of half-period ω_1 and elliptic period ratio τ.

We have $\wp(tz|t\omega,\tau) = t^{-2}\wp(z|\omega,\tau)$.

See also MathWorld [987], Flint [766].

See also: https://dlmf.nist.gov/23.2

$$\wp(z,\tau,\omega=1) = \frac{1}{z^2} + \sum_{n^2+m^2\neq 0}\left[\frac{1}{(z+m+n\tau)^2} - \frac{1}{(m+n\tau)^2}\right]$$

which satisfies $\wp(z,\tau,\omega=1) = \wp(z+1,\tau,\omega=1) = \wp(z+\tau,\tau,\omega=1)$. To evaluate the function efficiently, we use the formula (with with $q = e^{\pi i\tau}$)

$$\wp(z,\tau) = \pi^3\theta_2^2(0,q)\theta_3^2(0,q)\frac{\theta_4^2(\pi z,q)}{\theta_1^2(\pi z,q)} - \frac{\pi^3}{3}\left[\theta_2^4(0,q)+\theta_3^4(0,q)\right].$$

$$\wp(tz|t\omega_1,t\omega_2) = t^{-2}\wp(z|\omega_1,\omega_2)$$

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = 1.2+2j;  tau = 0.1+1.2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.weierstrass_p_t(x, tau)))
    fpm:  (-7.2543494503698, -0.131922508660363)
    mpm:  (-7.254349450369797280072152621242700239356, -0.131922508660363631256110614084823267684624)
cmath53:  (-7.25434945036978, -0.13192250866036)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = 1.2+2j;  tau = 0.1+1.2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.weierstrass_p_t(x, tau))))
    fpm:  -7.2543494503698
    mpm:  -7.254349450369797280072152621242700239356880164373927817462395992666900226271247510199827 83
    dpm:  -7.254349450369797280072152621242700239356880164373927817462395992666900226271247510199827 83
    gpm:  -7.254349450369797280072152621242700239356880164373927817462395992666900226271247510199827 8298
    apm: [-7.254349450369797280072152621242700239356880164373927817462395992666900226271247510199 83 +/- 3.45e-87]
cmath53:  -7.25434945036978
sflintc:  -7.254347
dflintc:  -7.2543494503698
eflintc:  -7.2543494503697972778
qflintc:  -7.254349450369797280072152621242 7
oflintc:  -7.254349450369797280072152621242700239356880164373927817462395992666900 3
mflintc:  -7.254349450369797280072152621242700239356880164373927817462395992666900226271247510199827 65
aflintc: [-7.254349450369797280072152621242700239356880164373927817462395992666900226271247510199 83 +/- 6.51e-87]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = 1.2+2j;  tau = 0.1+1.2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.weierstrass_p_t(x, tau))))
    fpm:  -0.131922508660363
    mpm:  -0.131922508660363125611061408823267684624303607998590362391427636233079685872490471504434127
    dpm:  -0.131922508660363125611061408823267684624303607998590362391427636233079685872490471504434127
```

(continues on next page)

(continued from previous page)

```
    gpm:  -0.131922508660363125611061408823267684624303607998590362391427636233079685872490471504434126 99
    apm: [-0.131922508660363125611061408823267684624303607998590362391427636233079685872490471504434126 99 +/- 5.35e-87]
cmath53:  -0.13192250866036
sflintc:  -0.1319214
dflintc:  -0.131922508660365
eflintc:  -0.13192250866036312458
qflintc:  -0.131922508660363125611061408823269
oflintc:  -0.131922508660363125611061408823267684624303607998590362391427636233079758
mflintc:  -0.131922508660363125611061408823267684624303607998590362391427636233079685872490471504434119
aflintc: [-0.131922508660363125611061408823267684624303607998590362391427636233079685872490471504434126 99 +/- 8.14e-87]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (complex input), and C# (real or complex input).

8.6.2 Weierstrass function, first derivative: $\wp' z|\tau)$

`ctx.weierstrass_p_prime_t(`z, *tau*`)`

Computes the first derivative of Weierstrass's elliptic function in terms of half-period ω_1 and elliptic period ratio τ.

We have $\wp'(tz|t\omega,\tau) = t^{-3}\wp'(z|\omega,\tau)$.

The Weierstrass elliptic function satisfies the differential equation $[\wp'(z,\tau)]^2 = 4[\wp(z,\tau)]^3 - g_2\wp(z,\tau) - g_3$.

$$\wp'(z,\tau) = \sqrt{4[\wp(z,\tau)]^3 - g_2\wp(z,\tau) - g_3}.$$

See also MathWorld [988], Flint [766].

See also: https://dlmf.nist.gov/23.2

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = 1.2+2j;  tau = 0.1+1.2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.weierstrass_pprime_t(x, tau)))
    fpm:  (0.992425539025143, 26.6634628200187)
    mpm:  (0.99242553902514249048485697440122694228662866435560884731469984345325811257636244276738194599, 26.663462820018657207653295670013379777 04)
cmath53:  (0.99242553902508, 26.6634628200188)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = 1.2+2j;  tau = 0.1+1.2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.weierstrass_pprime_t(x, tau))))
    fpm:  0.992425539025143
    mpm:  0.99242553902514249048485697440122694228662866435560884731469984345325811257636244276738194599
    dpm:  0.99242553902514249048485697440122694228662866435560884731469984345325811257636244276738194599
    gpm:  0.99242553902514249048485697440122694228662866435560884731469984345325811257636244276738194599
    apm: [0.99242553902514249048485697440122694228662866435560884731469984345325811257636244276738194599 +/- 6.61e-86]
cmath53:  0.99242553902508
sflintc:  0.9924368
dflintc:  0.992425539025129
eflintc:  0.99242553902514250071
qflintc:  0.99242553902514249048485697440121 5
oflintc:  0.99242553902514249048485697440122694228662866435560884731469984345325752
mflintc:  0.99242553902514249048485697440122694228662866435560884731469984345325811257636244276738203 3
aflintc: [0.99242553902514249048485697440122694228662866435560884731469984345325811257636244276738203 3 +/- 5.42e-85]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = 1.2+2j;  tau = 0.1+1.2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.weierstrass_pprime_t(x, tau))))
    fpm:  26.6634628200187
    mpm:  26.663462820018657207653295670013379777041902353354363413845275989018504837364730095288086 4
    dpm:  26.663462820018657207653295670013379777041902353354363413845275989018504837364730095288086 4
    gpm:  26.663462820018657207653295670013379777041902353354363413845275989018504837364730095288086401
    apm: [26.663462820018657207653295670013379777041902353354363413845275989018504837364730095288 1 +/- 6.21e-86]
cmath53:  26.6634628200188
sflintc:  26.66344
dflintc:  26.6634628200187
eflintc:  26.663462820018657187
qflintc:  26.663462820018657207653295670013 4
oflintc:  26.663462820018657207653295670013379777041902353354363413845275989018506
mflintc:  26.663462820018657207653295670013379777041902353354363413845275989018504837364730095288085
aflintc: [26.663462820018657207653295670013379777041902353354363413845275989018504837364730095288 +/- 2.46e-85]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (complex input), and C# (real or complex input).

8.6.3 Inverse Weierstrass function $\wp^{-1}(z|\tau)$

`ctx.`**`weierstrass_p_inv_t`**`(`z, *tau*`)`

Computes the inverse of the Weierstrass elliptic function in terms of half-period ω_1 and elliptic period ratio τ. It which satisfies $\wp(\wp^{-1}(z,\tau),\tau) = z$. This function is given by the elliptic integral

$$\wp^{-1}(z,\tau) = \frac{1}{2}\int_z^\infty \frac{\mathrm{d}t}{\sqrt{(t-e_1)(t-e_2)(t-e_3)}} = R_F(z-e_1, z-e_2, z-e_3).$$

See also MathWorld [983], Flint [766].

See also: https://dlmf.nist.gov/23.2

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = 1.2+2j;  tau = 0.1+1.2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.weierstrass_pinv_t(x, tau)))
    fpm:  (0.408458464677131, -0.297575206941329)
    mpm:  (0.4084584646771311633210730690530960731275, -0.2975752069413288186194559922372487678026)
cmath53:  (0.408458464677103, -0.297575206941308)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = 1.2+2j;  tau = 0.1+1.2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.weierstrass_pinv_t(x, tau))))
    fpm:  0.408458464677131
    mpm:  0.4084584646771311633210730690530960731275512046948408743601689263605156595855689315584256 82
    dpm:  0.4084584646771311633210730690530960731275512046948408743601689263605156595855689315584256 82
    gpm:  0.4084584646771311633210730690530960731275512046948408743601689263605156595855689315584256 8201
    apm: [0.4084584646771311633210730690530960731275512046948408743601689263605156595855689315584 3 +/- 6.50e-87]
cmath53:  0.408458464677103
sflintc:  0.4084585
dflintc:  0.408458464677131
eflintc:  0.40845846467713116333
qflintc:  0.4084584646771311633210730690530 6
oflintc:  0.4084584646771311633210730690530960731275512046948408743601689263605156 6
mflintc:  0.4084584646771311633210730690530960731275512046948408743601689263605156595855689315584256 83
aflintc: [0.4084584646771311633210730690530960731275512046948408743601689263605156595855689315584 +/- 3.37e-86]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = 1.2+2j;  tau = 0.1+1.2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.weierstrass_pinv_t(x, tau))))
    fpm:  -0.297575206941329
    mpm:  -0.29757520694132881861945599223724876780259083350413054448562934538054913299074426547329651502
    dpm:  -0.29757520694132881861945599223724876780259083350413054448562934538054913299074426547329651502
    gpm:  -0.29757520694132881861945599223724876780259083350413054448562934538054913299074426547329651502
    apm: [-0.29757520694132881861945599223724876780259083350413054448562934538054913299074426547330 +/- 4.82e-87]
cmath53:  -0.297575206941308
sflintc:  -0.2975752
dflintc:  -0.297575206941329
eflintc:  -0.29757520694132881862
qflintc:  -0.297575206941328818619455992237249
oflintc:  -0.29757520694132881861945599223724876780259083350413054448562934538054913
mflintc:  -0.29757520694132881861945599223724876780259083350413054448562934538054913299074426547329651502
aflintc: [-0.29757520694132881861945599223724876780259083350413054448562934538054913299074426547330 +/- 8.37e-87]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (complex input), and C# (real or complex input).

8.6.4 Weierstrass Zeta function $\zeta(z,\tau)$

`ctx.`**`weierstrass_zeta_t`**`(`z, *tau*`)`

Computes the Weierstrass zeta function in terms of half-period ω_1 and elliptic period ratio τ.

We have $\zeta(tz|t\omega,\tau) = t^{-1}\zeta(z|\omega,\tau)$.

The function can be defined as

$$\zeta(z|\omega,\tau) = \frac{1}{z} + \sum_{n^2+m^2\neq 0}\left[\frac{1}{z-m-n\tau} + \frac{1}{m+n\tau} + \frac{z}{(m+n\tau)^2}\right]$$

and is quasiperiodic with $\zeta(z+1|\omega,\tau) = \zeta(z|\omega,\tau) + \zeta(1/2|\omega,\tau)$ and $\zeta(z+\tau|\omega,\tau) = \zeta(z|\omega,\tau) + \zeta(\tau/2|\omega,\tau)$.

The function is related to $\wp(z|\omega,\tau)$ by $\dfrac{d\zeta(z|\omega,\tau)}{\mathrm{d}z} = -\wp(z|\omega,\tau)$ and $\zeta(z|\omega,\tau) - z^{-1} = \displaystyle\int_0^z \left(\wp(z|\omega,\tau) - z^{-2}\right)$.

See also MathWorld [990], Flint [766].

See also: https://dlmf.nist.gov/23.2

To evaluate the function efficiently, we use the formula

$$\zeta(z|\omega,\tau) = \frac{\pi z}{3}\frac{\theta_1'''(0,q)}{\theta_1'(0,q)} + \frac{\theta_1'(\pi z,q)}{\theta_1(\pi z,q)}$$

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = 1.2+2j;  tau = 0.1+1.2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.weierstrass_zeta_t(x, tau)))
    fpm:  (3.98088971569181, -2.42206897334368)
    mpm:  (3.980889715691808342151541496199970266175, -2.42206897334367955779053843488796026599 3)
cmath53:  (3.98088971569094, -2.42206897334536)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = 1.2+2j;  tau = 0.1+1.2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.weierstrass_zeta_t(x, tau))))
```

(continues on next page)

(continued from previous page)

```
    fpm:  3.98088971569181
    mpm:  3.9808897156918083421515414961999702661751416412031409207726384396548169354084179349042506 5
    dpm:  3.9808897156918083421515414961999702661751416412031409207726384396548169354084179349042506 5
    gpm:  3.9808897156918083421515414961999702661751416412031409207726384396548169354084179349042506 5
    apm: [3.9808897156918083421515414961999702661751416412031409207726384396548169354084179349042 5 +/- 4.33e-87]
cmath53:  3.98088971569094
sflintc:  3.98089
dflintc:  3.98088971569181
eflintc:  3.9808897156918083425
qflintc:  3.980889715691808342151541496199 7
oflintc:  3.98088971569180834215154149619997026617514164120314092077263843965481693540841793490425169
mflintc:  3.980889715691808342151541496199970266175141641203140920772638439654816935408417934904251 7
aflintc: [3.98088971569180834215154149619997026617514164120314092077263843965481693540841793490 43 +/- 5.73e-86]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = 1.2+2j;  tau = 0.1+1.2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.weierstrass_zeta_t(x, tau))))
    fpm:  -2.42206897334368
    mpm:  -2.42206897334367955779053843488796026599235783779262173270959846645627952283525720707 83
    dpm:  -2.42206897334367955779053843488796026599235783779262173270959846645627952283525720707 83
    gpm:  -2.42206897334367955779053843488796026599235783779262173270959846645627952283525720707 82999
    apm: [-2.42206897334367955779053843488796026599235783779262173270959846645627952283525720707 127 +/- 4.76e-87]
cmath53:  -2.42206897334536
sflintc:  -2.422069
dflintc:  -2.42206897334368
eflintc:  -2.4220689733436795582
qflintc:  -2.42206897334367955779053843488796
oflintc:  -2.42206897334367955779053843488796026599235783779262173270959846645627 95
mflintc:  -2.42206897334367955779053843488796026599235783779262173270959846645627952283525720707 126845
aflintc: [-2.42206897334367955779053843488796026599235783779262173270959846645627952283525720707 13 +/- 4.01e-86]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (complex input), and C# (real or complex input).

8.6.5 Weierstrass Sigma function $\sigma(z|\tau)$

`ctx.weierstrass_sigma_t(`*z*, *omega*, *tau*`)`

Computes the Weierstrass sigma function in terms of half-period ω_1 and elliptic period ratio τ. We have $\sigma(tz|t\omega,\tau) = t\sigma(z|\omega,\tau)$.

See also MathWorld [989], Flint [766].

See also: https://dlmf.nist.gov/23.2

The function can be defined as

$$\sigma(z|\omega,\tau) = z \prod_{n^2+m^2\neq 0} \left[\left(1-\frac{z}{m+n\tau}\right)\exp\left(\frac{z}{m+n\tau}+\frac{z^2}{2(m+n\tau)^2}\right)\right]$$

and is quasiperiodic with $\sigma(z+1|\omega,\tau) = -e^{2\zeta(1/2|\omega,\tau)(z+1/2)}\sigma(z|\omega,\tau)$ and $\sigma(z+\tau|\omega,\tau) = -e^{2\zeta(\tau/2|\omega,\tau)(z+\tau/2)}\sigma(z|\omega,\tau)$.

The function is related to $\zeta(z|\omega,\tau)$ by $\dfrac{d}{\mathrm{d}z}\log\sigma(z|\omega,\tau) = \zeta(z|\omega,\tau)$.

See also MathWorld [989], Flint [766].

To evaluate the function efficiently, we use the formula

$$\sigma(z,\tau) = \exp\left(-\frac{(\pi z)^2}{6}\frac{\theta_1'''(0,q)}{\theta_1'(0,q)}\right)\times\frac{\theta_1(\pi z,q)}{\theta_1'(\pi z,q)}$$

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = 1.2+2j;  tau = 0.1+1.2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.weierstrass_sigma_t(x, tau)))
    fpm:  (-58.2289241875752, 186.450409191644)
    mpm:  (-58.228924187575158313698229823070700652788947392932149320847754676264872753603678004134255, 186.450409191643886446947563300572555450146544108080848765958214622288239763490128271881774)
cmath53:  (-58.2289241872898, 186.450409191966)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = 1.2+2j;  tau = 0.1+1.2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.weierstrass_sigma_t(x, tau))))
    fpm:  -58.2289241875752
    mpm:  -58.228924187575158313698229823070700652788947392932149320847754676264872753603678004134255
    dpm:  -58.228924187575158313698229823070700652788947392932149320847754676264872753603678004134255
    gpm:  -58.228924187575158313698229823070700652788947392932149320847754676264872753603678004134254996
    apm: [-58.228924187575158313698229823070700652788947392932149320847754676264872753603678004134 +/- 6.30e-85]
cmath53:  -58.2289241872898
sflintc:  -58.2289
dflintc:  -58.2289241875752
eflintc:  -58.228924187575158294
qflintc:  -58.228924187575158313698229823070 7
oflintc:  -58.228924187575158313698229823070700652788947392932149320847754676264874
mflintc:  -58.228924187575158313698229823070700652788947392932149320847754676264872753603678004134 3585
aflintc: [-58.228924187575158313698229823070700652788947392932149320847754676264872753603678004134 +/- 6.86e-85]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = 1.2+2j;  tau = 0.1+1.2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.weierstrass_sigma_t(x, tau))))
    fpm:  186.450409191644
    mpm:  186.450409191643886446947563300572555450146544108080848765958214622288239763490128271881774
    dpm:  186.450409191643886446947563300572555450146544108080848765958214622288239763490128271881774
    gpm:  186.450409191643886446947563300572555450146544108080848765958214622288239763490128271881774001
    apm: [186.450409191643886446947563300572555450146544108080848765958214622288239763490128271881 8 +/- 4.73e-85]
cmath53:  186.450409191966
sflintc:  186.4504
dflintc:  186.450409191644
eflintc:  186.45040919164388643
qflintc:  186.4504091916438864469475633005 3
oflintc:  186.450409191643886446947563300572555450146544108080848765958214622288 4
mflintc:  186.450409191643886446947563300572555450146544108080848765958214622288239763490128271881 795
aflintc: [186.450409191643886446947563300572555450146544108080848765958214622288239763490128271881 +/- 5.29e-85]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (complex input), and C# (real or complex input).

8.7 Modular forms, in terms of half-period ω_1 and elliptic period ratio τ

8.7.1 Dedekind eta function $\eta(\tau)$

ctx.dedekind_eta(*tau*)

Returns Dedekind η in terms of elliptic period ratio τ. . See also Flint [761], MathWorld [969], Mathworld, equation 20:

$$\eta(\tau) = \frac{\theta_2(\pi/6, \bar{q}^{1/6})}{\sqrt{3}}, \quad \text{where } \bar{q} = q^2 = e^{2i\pi\tau}.$$

See also: https://dlmf.nist.gov/23.15#ii

Returns the Dedekind eta function $\eta(ix)$ for $x \geq 0$, with $\eta(x) = q^{1/24}(q)_\infty$, and $(q)_\infty$ is is the q-Pochhammer Euler function.

See also: MathWorld [969], Ehrhardt [295] (3.2.17.10).

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> tau = 0.1+1.2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.dedekind_eta(tau)))
    fpm:  (0.729844359380083, 0.0188831925200341)
    mpm:  (0.729844359380083005455682079528903936948641546143867465563109628101519787122062963401378976, 0.018883192520034099704395765586264420528080230956752851182627364648095617207665949885212097701)
cmath53:  (0.729844359380083, 0.0188831925200341)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> tau = 0.1+1.2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.dedekind_eta(tau))))
    fpm:  0.729844359380083
    mpm:  0.729844359380083005455682079528903936948641546143867465563109628101519787122062963401378976
    dpm:  0.729844359380083005455682079528903936948641546143867465563109628101519787122062963401378976
    gpm:  0.729844359380083005455682079528903936948641546143867465563109628101519787122062963401378976040
    apm: [0.729844359380083005455682079528903936948641546143867465563109628101519787122062963401378975 +/- 8.79e-91]
cmath53:  0.729844359380083
sflintc:  0.7298443
dflintc:  0.729844359380083
eflintc:  0.72984435938008300547
qflintc:  0.729844359380083005455682079528904
oflintc:  0.729844359380083005455682079528903936948641546143867465563109628101519787122062963401378975
mflintc:  0.729844359380083005455682079528903936948641546143867465563109628101519787122062963401378975
aflintc: [0.729844359380083005455682079528903936948641546143867465563109628101519787122062963401378975 +/- 7.62e-90]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> tau = 0.1+1.2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.dedekind_eta(tau))))
    fpm:  0.0188831925200341
    mpm:  0.018883192520034099704395765586264420528080230956752851182627364648095617207665949885212097701
    dpm:  0.018883192520034099704395765586264420528080230956752851182627364648095617207665949885212097701
    gpm:  0.018883192520034099704395765586264420528080230956752851182627364648095617207665949885212097701
    apm: [0.018883192520034099704395765586264420528080230956752851182627364648095617207665949885212097976 +/- 7.86e-92]
cmath53:  0.0188831925200341
sflintc:  0.01888319
dflintc:  0.0188831925200341
eflintc:  0.018883192520034099705
qflintc:  0.018883192520034099704395765586264
oflintc:  0.018883192520034099704395765586264420528080230956752851182627364648095617
mflintc:  0.018883192520034099704395765586264420528080230956752851182627364648095617207665949885212097976
aflintc: [0.018883192520034099704395765586264420528080230956752851182627364648095617207665949885212098 +/- 5.20e-91]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (complex input), and C# (real or complex input).

8.7.2 Elliptic modular lambda function $\lambda(\tau)$ (also DAMath)

`ctx.ctx.elliptic_modular_lambda(tau)`

Computes the lambda function $\lambda(\tau) = \theta_2^4(0,\tau)/\theta_3^4(0,\tau)$ in terms of elliptic period ratio τ. It is invariant under modular transformations $(a,b;c,d)$ where a,d are odd and b,c are even.

See also MathWorld [971], Flint [765].

See also: https://dlmf.nist.gov/23.15#ii

Returns the elliptic modular function $\lambda(\tau), \tau = iy, y \geq 0$, $\lambda(\tau) = \dfrac{\theta_2^4(0,q)}{\theta_e^4(0,q)}, q = e^{i\pi\tau} = e^{-\pi y}$.

See also: MathWorld [971], Ehrhardt [295] (3.2.17.11).

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> tau = 0.1+1.2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.modular_lambda(tau)))
    fpm:  (0.300577711578404, 0.0802212287569385)
    mpm:  (0.3005777115784043400282817386874703712030, 0.0802212287569384947480600383760390108135)
cmath53:  (0.300577711578405, 0.0802212287569385)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> tau = 0.1+1.2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.modular_lambda(tau))))
    fpm:  0.300577711578404
    mpm:  0.300577711578404340028281738687470371202958619984498518690738995316323687845851051645508437
    dpm:  0.300577711578404340028281738687470371202958619984498518690738995316323687845851051645508437
    gpm:  0.300577711578404340028281738687470371202958619984498518690738995316323687845851051645508437
    apm: [0.300577711578404340028281738687470371202958619984498518690738995316323687845851051645508437 +/- 7.26e-90]
cmath53:  0.300577711578405
sflintc:  0.3005777
dflintc:  0.300577711578404
eflintc:  0.30057771157840433999
qflintc:  0.300577711578404340028281738687470371202958619984498518690738995316323687845851051645508437
oflintc:  0.300577711578404340028281738687470371202958619984498518690738995316323687845851051645508437
mflintc:  0.300577711578404340028281738687470371202958619984498518690738995316323687845851051645508432
aflintc: [0.300577711578404340028281738687470371202958619984498518690738995316323687845851051645508437 +/- 4.59e-89]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> tau = 0.1+1.2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.modular_lambda(tau))))
    fpm:  0.0802212287569385
    mpm:  0.080221228756938494748060038376039010813534623673125852569879858290876176842297854192494793
    dpm:  0.080221228756938494748060038376039010813534623673125852569879858290876176842297854192494793
    gpm:  0.080221228756938494748060038376039010813534623673125852569879858290876176842297854192494792996
    apm: [0.080221228756938494748060038376039010813534623673125852569879858290876176842297854192494792996 +/- 4.30e-90]
cmath53:  0.0802212287569385
sflintc:  0.08022122
dflintc:  0.0802212287569385
eflintc:  0.080221228756938494741
qflintc:  0.080221228756938494748060038376039
oflintc:  0.080221228756938494748060038376039010813534623673125852569879858290876177
```

(continues on next page)

(continued from previous page)

```
mflintc:  0.0802212287569384947480600383760390108135346236731258525698798582908761768422978541924947918
aflintc: [0.0802212287569384947480600383760390108135346236731258525698798582908761768422978541924947918 +/- 7.07e-90]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (complex input), and C# (real or complex input).

8.7.3 Elliptic modular delta function $\Delta(\omega, \tau)$

`ctx.ctx.`**`elliptic_modular_delta`**(*omega*, *tau*)

Computes the modular discriminant $\Delta(\tau) = \eta(\tau)^{24}$ in terms of half-period ω_1 and elliptic period ratio τ. It transforms as

$$\Delta\left(\frac{a\tau + b}{c\tau + d}\right) = (c\tau + d)^{12}\Delta(\tau).$$

The modular discriminant is sometimes defined with an extra factor $(2\pi)^{12}$, which we omit in this implementation.

We have $\Delta(t\omega, \tau) = t^{-12}\Delta(\omega, \tau)$.

$$\Delta = g_2^3 - 27g_3^2 = 4096\pi^{12}\eta(\tau)^{24}$$

for Weierstrass invariants g_2, g_3, and Dedekind eta function $\eta(\tau)$.

See also Wikipedia [1349], MathWorld [985], Flint [765].

See also: https://dlmf.nist.gov/23.3#i

Computes the modular discriminant $\Delta(\tau) = \eta(\tau)^{24}$ in terms of elliptic period ratio τ. It transforms as

$$\Delta(g_2, g_3) = g_2^3 - 27g_3^2 = \Delta(e_1, e_2, e_3) = 16(e_2 - e_3)^2(e_3 - e_1)^2(e_1 - e_2)^2.$$

See also Wikipedia [1349], MathWorld [985], Flint [765].

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> tau = 0.1+1.2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.modular_delta(tau)))
    fpm:  (0.000427879467431278, 0.0003059912940749042846053724625759338221924)
    mpm:  (0.000427879467431279966525140341692590759973793001788905022564351626292739292314368289012572583)
cmath53:  (0.000427879467431282, 0.0003059912940749042846053724625759338221924)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> tau = 0.1+1.2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.modular_delta(tau))))
    fpm:  0.000427879467431278
    mpm:  0.000427879467431279966525140341692590759973793001788905022564351626292739292314368289012572583
    dpm:  0.000427879467431279966525140341692590759973793001788905022564351626292739292314368289012572583
    gpm:  0.000427879467431279966525140341692590759973793001788905022564351626292739292314368289012572583028
    apm: [0.000427879467431279966525140341692590759973793001788905022564351626292739292314368289012572583 +/- 3.47e-92]
cmath53:  0.000427879467431282
sflintc:  0.0004278793
dflintc:  0.000427879467431278
eflintc:  0.00042787946743127996641
qflintc:  0.000427879467431279966525140341692591
oflintc:  0.000427879467431279966525140341692590759973793001788905022564351626292739393
mflintc:  0.000427879467431279966525140341692590759973793001788905022564351626292739292314368289012572562
aflintc: [0.000427879467431279966525140341692590759973793001788905022564351626292739292314368289012572583 +/- 8.95e-92]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> tau = 0.1+1.2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.modular_delta(tau))))
    fpm:  0.000305991294074904
    mpm:  0.000305991294074904284605372462575933822192369703989832519495247154668902964985370762146354576
    dpm:  0.000305991294074904284605372462575933822192369703989832519495247154668902964985370762146354576
    gpm:  0.000305991294074904284605372462575933822192369703989832519495247154668902964985370762146354576 02
    apm: [0.000305991294074904284605372462575933822192369703989832519495247154668902964985370762146354576 02 +/- 3.62e-92]
cmath53:  0.000305991294074906
sflintc:  0.0003059912
dflintc:  0.000305991294074904
eflintc:  0.00030599129407490428451
qflintc:  0.000305991294074904284605372462575934
oflintc:  0.000305991294074904284605372462575933822192369703989832519495247154668902970
mflintc:  0.000305991294074904284605372462575933822192369703989832519495247154668902964985370762146354576
aflintc: [0.000305991294074904284605372462575933822192369703989832519495247154668902964985370762146354576 +/- 7.22e-92]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (complex input), and C# (real or complex input).

8.7.4 Klein j-invariant $j(\tau)$ (also DAMath)

`ctx.`**`klein_j`**`(`*tau*`)`

Returns the Klein j-invariant in terms of elliptic period ratio τ. See also Wikipedia [1357], MathWorld [1001], NIST [474], Flint [765], Mpmath [683].

See also: https://dlmf.nist.gov/23.15#ii

Computes Klein's j-invariant $j(\tau)$ given τ in the upper half-plane. The function is normalized so that $j(i) = 1728$. We first move τ to the fundamental domain, which does not change the value of the function. Then we use the formula

$$j(\tau) = 1728\frac{g_2^3}{g_2^3 - 27g_3^2} = 32(\theta_2^8 + \theta_3^8 + \theta_4^8)^3/(\theta_2\theta_3\theta_4)^8$$

where $\theta_i = \theta_i(0, \tau)$.

Returns the Klein j-invariant $J(\tau), \tau = iy, y \geq 0$, $J(\tau) = \dfrac{\left(\theta_2^8(q) + \theta_3^8(q) + \theta_4^8(q)\right)^3}{54(\theta_1')^8(q)}, q = e^{i\pi\tau} = e^{-\pi y}$.

See also: Wikipedia [1357], MathWorld [1001], Ehrhardt [295] (3.2.17.12).

Returns the Klein j-invariant in terms of elliptic period ratio τ. See also Wikipedia [1357], MathWorld [1001], NIST [474], Flint [765].

$$j(g_1, g_2) = 1728\frac{g_2^3}{g_2^3 - 27g_3^2}$$

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> tau = 0.1+1.2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.klein_j(tau)))
    fpm:  (2352.65426118271, -1038.50945324977)
    mpm:  (2352.654261182714612483685954244309154515, -1038.5094532497741014407661877949806651 74)
cmath53:  (2352.65426118271, -1038.50945324977)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> tau = 0.1+1.2j; gui.setdps(90)
```

(continues on next page)

(continued from previous page)

```
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.klein_j(tau))))
    fpm:  2352.65426118271
    mpm:  2352.654261182714612483685954244309154514537583214806776183714890550918531697409200643002 55
    dpm:  2352.654261182714612483685954244309154514537583214806776183714890550918531697409200643002 55
    gpm:  2352.654261182714612483685954244309154514537583214806776183714890550918531697409200643002 5498
    apm: [2352.654261182714612483685954244309154514537583214806776183714890550918531697409200643003 +/- 6.20e-85]
cmath53:  2352.65426118271
sflintc:  2352.655
dflintc:  2352.65426118271
eflintc:  2352.6542611827146128
qflintc:  2352.654261182714612483685954244 31
oflintc:  2352.654261182714612483685954244309154514537583214806776183714890550918 5
mflintc:  2352.654261182714612483685954244309154514537583214806776183714890550918531697409200643002 59
aflintc: [2352.654261182714612483685954244309154514537583214806776183714890550918531697409200643000 +/- 3.22e-84]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> tau = 0.1+1.2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.klein_j(tau))))
    fpm:  -1038.50945324977
    mpm:  -1038.5094532497741014407661877949806651737483559434265825626115419672550187951727235702260 4
    dpm:  -1038.5094532497741014407661877949806651737483559434265825626115419672550187951727235702260 4
    gpm:  -1038.5094532497741014407661877949806651737483559434265825626115419672550187951727235702260 401
    apm: [-1038.5094532497741014407661877949806651737483559434265825626115419672550187951727235702260 +/- 2.20e-85]
cmath53:  -1038.50945324977
sflintc:  -1038.51
dflintc:  -1038.50945324977
eflintc:  -1038.5094532497741018
qflintc:  -1038.5094532497741014407661877 9498
oflintc:  -1038.5094532497741014407661877949806651737483559434265825626115419672 55
mflintc:  -1038.5094532497741014407661877949806651737483559434265825626115419672550187951727235702260 7
aflintc: [-1038.5094532497741014407661877949806651737483559434265825626115419672550187951727235702260 +/- 6.88e-85]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (complex input), and C# (real or complex input).

CHAPTER

NINE

LERCH'S PHI AND RELATED

The Lerch transcendent generalizes various other functions:

The polygamma function (see *polygamma()*) is given by

$$\psi^{(n)}(z) = (-1)^{n+1} n!\, \Phi(1, n+1, z).$$

The polylogarithm (see *polylog()*) is given by

$$\mathrm{Li}_s(z) = z\Phi(z, s, 1)).$$

The Legendre chi function (see *legendre_chi()*) is given by

$$\chi_n(z) = 2^{-n} z \Phi(z^2, n, 1/2).$$

The Hurwitz zeta function (see *hurwitz()*) is given by

$$\zeta(s, a) = \Phi(1, s, a).$$

The Riemann zeta function (see *zeta()*) is given by

$$\zeta(s) = \Phi(1, s, 1).$$

The Dirichlet eta function (see *dirichlet_eta()*) is given by

$$\eta(s) = \Phi(-1, s, 1).$$

Various identities include:

$$\Phi(z, s, a) = z^n \Phi(z, s, a+n) + \sum_{k=0}^{n-1} \frac{z^k}{(k+a)^s}$$

and

$$\Phi(z, s-1, a) = \left(a + z\frac{\partial}{\partial z}\right) \Phi(z, s, a)$$

and

$$\Phi(z, s+1, a) = -\frac{1}{s}\frac{\partial}{\partial a}\Phi(z, s, a).$$

The source code for the C# tests in Visual Studio is divided by real and complex modules:

The source code for the C# tests in Visual Studio using real modules can be found online in the `XlCalcNet` repository or in the corresponding local `XlCalcNet` folder in the file B09a_RealLerchPhi.cs,

The source code for the C# tests in Visual Studio using complex modules can be found online in the `XlCalcNet` repository or in the corresponding local `XlCalcNet` folder in the file B09b_CplxLerchPhi.cs,

9.1 Lerch's transcendent and Lerch's zeta

9.1.1 Lerch's transcendent, $\Phi(x, s, a)$

`ctx.lerch_phi(`s, z, a`)`

where `ctx` is `math53` or `ctxflint`.

Returns the Lerch transcendent $\Phi(z, s, a)$. See also Wikipedia [1352], MathWorld [1002], NIST [12], Ehrhardt [295] (3.6.10), Flint [764], Mpmath [696].

The function is defined for $|z| < 1$ and $\Re a > 0$ by

$$\Phi(z, s, a) = \sum_{k=0}^{\infty} \frac{z^k}{(a+k)^s}$$

and generally by the recurrence $\Phi(z, s, a) = z\Phi(z, s, a+1) + a^{-s}$ along with the integral representation valid for $\Re a > 0$

$$\Phi(z, s, a) = \frac{1}{2a^s} + \int_0^{\infty} \frac{z^t}{(a+t)^s} \mathrm{d}t - 2\int_0^{\infty} \frac{\sin(t\log z - s\arctan(t/a)}{(a^2+t^2)^{s/2}(e^{2\pi t}-1)} \mathrm{d}t.$$

The Amath implementation requires $x \leq 1, s \geq -1, a \geq 0$. We have also $\Phi(x, 0, a) = 1/(1-x)$ and $\Phi(x, s, 0) = \mathrm{Li}_s(x)$.

See also: https://fredrikj.net/blog/2022/02/computing-the-lerch-transcendent/

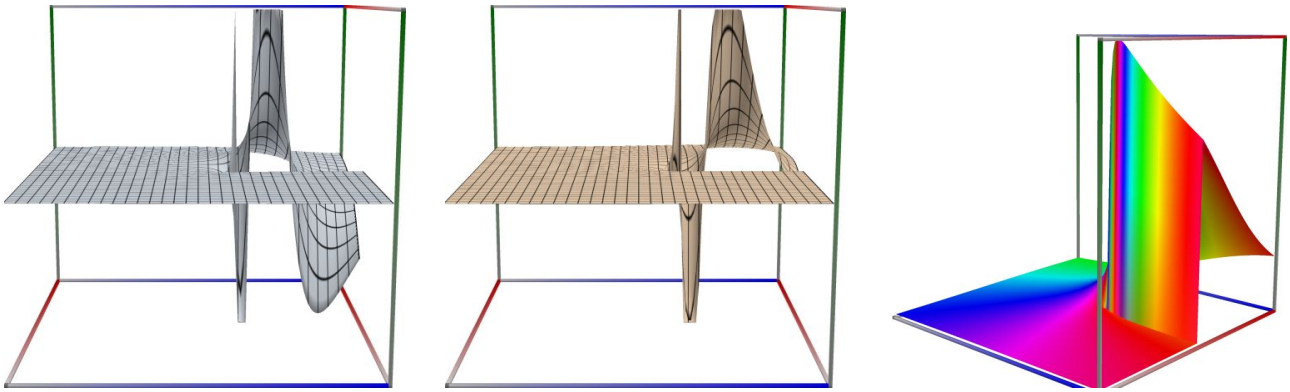

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \leq x \leq 6$ (blue axis), $-6 \leq y \leq 6$ (red axis), $-10 \leq z \leq 10$ (green axis). Function values are *loglog-transformed*.

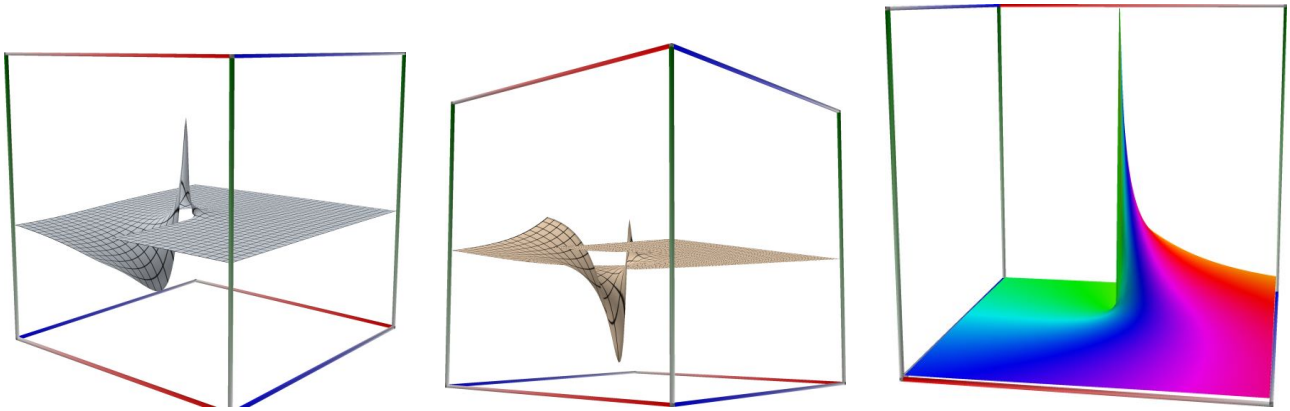

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \leq x \leq 6$ (blue axis), $-6 \leq y \leq 6$ (red axis), $-10 \leq z \leq 10$ (green axis). Function values are *loglog-transformed*.

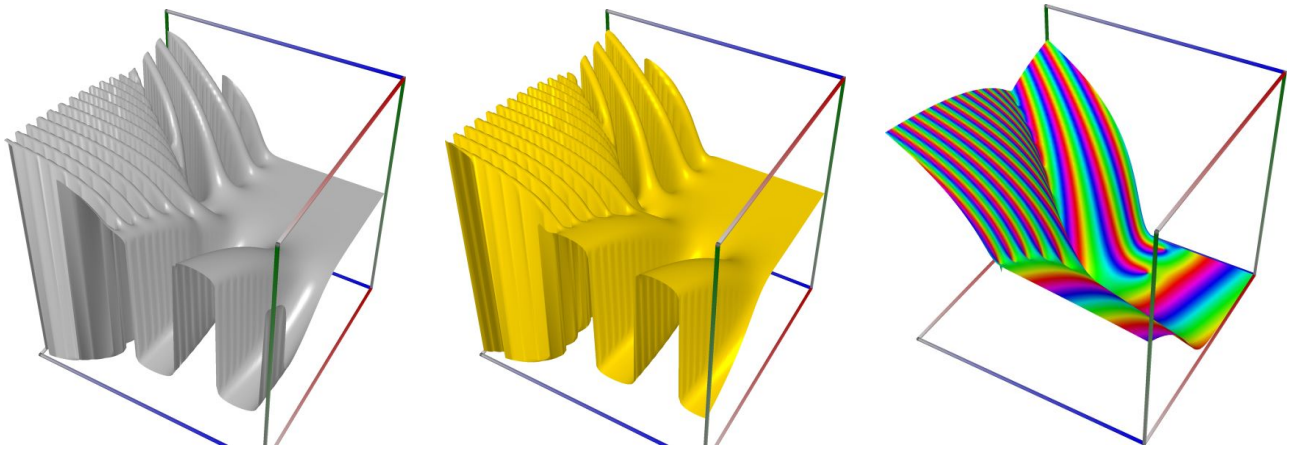

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> z = -0.8; s = -0.5; a = 0.3; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.lerch_phi(z, s, a)))
    fpm:  0.123808328418779
    mpm:  0.123808328418778929202068596100771367142889320531989172565355231698781813985907582795703294
    dpm:  0.123808328418778929202068596100771367142889320531989172565355231698781813985907582795703294
    gpm:  0.123808328418778929202068596100771367142889320531989172565355231698781813985907582795703329399
    apm: [0.123808328418778929202068596100771367142889320531989172565355231698781813985907582795703 +/- 1.52e-89]
 math53:  0.123808328418779
 sflint:  0.1238083
 dflint:  0.123808328418779
 eflint:  0.12380832841877892921
 qflint:  0.123808328418778929202068596100771
 oflint:  0.123808328418778929202068596100771367142889320531989172565355231698781
 mflint:  0.123808328418778929202068596100771367142889320531989172565355231698781813985907582795703294
 aflint: [0.123808328418778929202068596100771367142889320531989172565355231698781813985907582795703 +/- 1.36e-89]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> z = -5.1+2j;  s = 2.7+2j; a = 1.3+2j;  gui.setdps(40)
>>> for ctx in [fpm, mpm]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.lerch_phi(z, s, a)))
    fpm:  (-0.0627085773238789, 0.285173796041804)
    mpm:  (-0.062708577323878871009100832932434296027788, 0.285173796041803808224954673860309781587
7)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> z = -5.1+2j;  s = 2.7+2j; a = 1.3+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.lerch_phi(z, s, a))))
    fpm:  -0.0627085773238789
    mpm:  -0.062708577323878871009100832932434296027888350970907034337600007760599803348800854639811627196
    dpm:  -0.062708577323878871009100832932434296027888350970907034337600007760599803348800854639811627196
    gpm:  -0.062708577323878871009100832932434296027888350970907034337600007760599803348800854639811627196
    apm: [-0.062708577323878871009100832932434296027888350970907034337600007760599803348800854639811 +/- 9.36e-89]
cmath53:  NaN
sflintc:  -0.06270856
dflintc:  -0.0627085773238788
eflintc:  -0.062708577323878870987
qflintc:  -0.062708577323878871009100832932434342
```

(continues on next page)

(continued from previous page)

```
oflintc:  -0.06270857732387887100910083293243429602788835097090703433760000776059980334880085463981162 77
mflintc:  -0.06270857732387887100910083293243429602788835097090703433760000776059980334880085463981162 77
aflintc: [-0.06270857732387887100910083293243429602788835097090703433760000776059980334880085463981162 77 +/- 5.97e-88]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> z = -5.1+2j;  s = 2.7+2j; a = 1.3+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.lerch_phi(z, s, a))))
    fpm:  0.285173796041804
    mpm:  0.285173796041803808224954673860309781587704300529277183606049018295125045429867544686889185
    dpm:  0.285173796041803808224954673860309781587704300529277183606049018295125045429867544686889185
    gpm:  0.285173796041803808224954673860309781587704300529277183606049018295125045429867544686889185
    apm: [0.285173796041803808224954673860309781587704300529277183606049018295125045429867544686889 2 +/- 8.01e-89]
cmath53:  NaN
sflintc:  0.2851738
dflintc:  0.285173796041804
eflintc:  0.28517379604180380823
qflintc:  0.285173796041803808224954673860 31
oflintc:  0.285173796041803808224954673860309781587704300529277183606049018295125 04
mflintc:  0.285173796041803808224954673860309781587704300529277183606049018295125045429867544686889191
aflintc: [0.285173796041803808224954673860309781587704300529277183606049018295125045429867544686889 +/- 4.18e-88]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

9.1.2 Lerch's zeta

`ctx.lerch_zeta`(*lambda1*, *alpha*, *s*)

Returns the lerch zeta function. See also Wikipedia [1352], Apostol [11], Ferreira and López [299].

The Lerch zeta function is given by

$$L(\lambda_1, \alpha, s) = \sum_{n=0}^{\infty} \frac{e^{2\pi i \lambda n}}{(n+\alpha)^s}.$$

The Lerch zeta function is related to the Lerch transcendent by

$$L(\lambda_1, \alpha, s) = \Phi(e^{2\pi i \lambda_1}, s, \alpha).$$

For λ_1 rational, $L(\lambda_1, \alpha, s)$ may be expressed as a finite sum over the Hurwitz zeta-function. Suppose $\lambda_1 = \frac{p}{q}$ with $p, q \in \mathbb{Z}$ and $q > 0$. Then $z = \omega = e^{2\pi i \frac{p}{q}}$ and $\omega^q = 1$.

$$L(\lambda_1, \alpha, s) = \Phi(\omega, s, \alpha) = \sum_{n=0}^{\infty} \frac{\omega^n}{(n+\alpha)^s} = \sum_{m=0}^{q-1} \omega^m q^{-s} \zeta\left(s, \frac{m+\alpha}{q}\right)$$

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> lambda1 = -5.1+2j;  alpha = 2.7+2j; s = 1.3+2j;  gui.setdps(40)
>>> for ctx in [fpm, mpm]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.lerch_zeta(lambda1, alpha, s)))
    fpm:  (-0.735918248768655, 0.0821281539931932)
    mpm:  (-0.735918248768655312866423311190263021022352264694369727202201322123643908010177136691707872)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> lambda1 = -5.1+2j;  alpha = 2.7+2j; s = 1.3+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.lerch_zeta(lambda1, alpha, s))))
    fpm:  -0.735918248768655
    mpm:  -0.735918248768655312866423311190263021022352264694369727202201322123643908010177136691707872
    dpm:  -0.735918248768655312866423311190263021022352264694369727202201322123643908010177136691707872
    gpm:  -0.735918248768655312866423311190263021022352264694369727202201322123643908010177136691707872
    apm: [-0.735918248768655312866423311190263021022352264694369727202201322123643908010177136691707872 +/- 8.39e-91]
cmath53:  NaN
sflintc:  -0.7359183
dflintc:  -0.735918248768655
eflintc:  -0.7359182487686553129
qflintc:  -0.735918248768655312866423311190263
oflintc:  -0.735918248768655312866423311190263021022352264694369727202201322123643908010177136691707872
mflintc:  -0.735918248768655312866423311190263021022352264694369727202201322123643908010177136691707872
aflintc: [-0.735918248768655312866423311190263021022352264694369727202201322123643908010177136691707872 +/- 2.64e-90]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> lambda1 = -5.1+2j;  alpha = 2.7+2j; s = 1.3+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.lerch_zeta(lambda1, alpha, s))))
    fpm:  0.0821281539931932
    mpm:  0.082128153993193188652079816722212212566084727286361829805258651873002962361362900745757533207
    dpm:  0.082128153993193188652079816722212212566084727286361829805258651873002962361362900745757533207
    gpm:  0.082128153993193188652079816722212212566084727286361829805258651873002962361362900745757533207
    apm: [0.082128153993193188652079816722212212566084727286361829805258651873002962361362900745757533 +/- 4.95e-91]
cmath53:  NaN
sflintc:  0.08212814
```

(continues on next page)

(continued from previous page)

```
dflintc:  0.0821281539931932
eflintc:  0.082128153993193188639
qflintc:  0.0821281539931931886520798167222122
oflintc:  0.082128153993193188652079816722212212566084727286361829805258651873002964
mflintc:  0.0821281539931931886520798167222122125660847272863618298052586518730029623613629007457575 33
aflintc: [0.0821281539931931886520798167222122125660847272863618298052586518730029623613629007457575 33 +/- 5.28e-91]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (complex input), and C# (real or complex input).

9.2 Polygamma and related functions

9.2.1 Polygamma function, $\psi^{(n)}(x)$

`ctx.polygamma(`n, x`)`

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns the polygamma function $\psi^{(n)}(x), \quad x \neq 0, -1, -2, \ldots$ The function returns the Hurwitz zeta value $(-1)^{n+1} n! \zeta(n+1, x)$ if x is positive; for $x < 0$ it is calculated from $\psi^{(n)}(1-x) + (-1)^{n+1}\psi^{(n)}(x) = (-1)^n \pi \frac{\mathrm{d}^n}{\mathrm{d}x^n} \cot(\pi x)$.

See also Wikipedia [1262], MathWorld [889], NIST [23], BoostMath [109], Ehrhardt [295] (3.5.6.6), Flint [725], Mpmath [596].

This function computes the polygamma function $\psi^{(n)}(x)$, i.e. the n^{th} derivative of the ψ function, with $n \geq 0$ and $x \neq 0, -1, -2, \ldots$. For $x > 0$ the result is calculated as

$$\psi^{(n)}(x) = (-1)^{n+1} n!\, \Phi(1, n+1, x) = (-1)^{n+1} n! \zeta(n+1, x).$$

The generalization to other values of s is due to Espinosa and Moll (see Espinosa and Moll [296]) :

$$\psi(s, z) = \frac{\zeta'(s+1, z) + (\gamma + \psi(-s))\zeta(s+1, z)}{\Gamma(-s)}$$

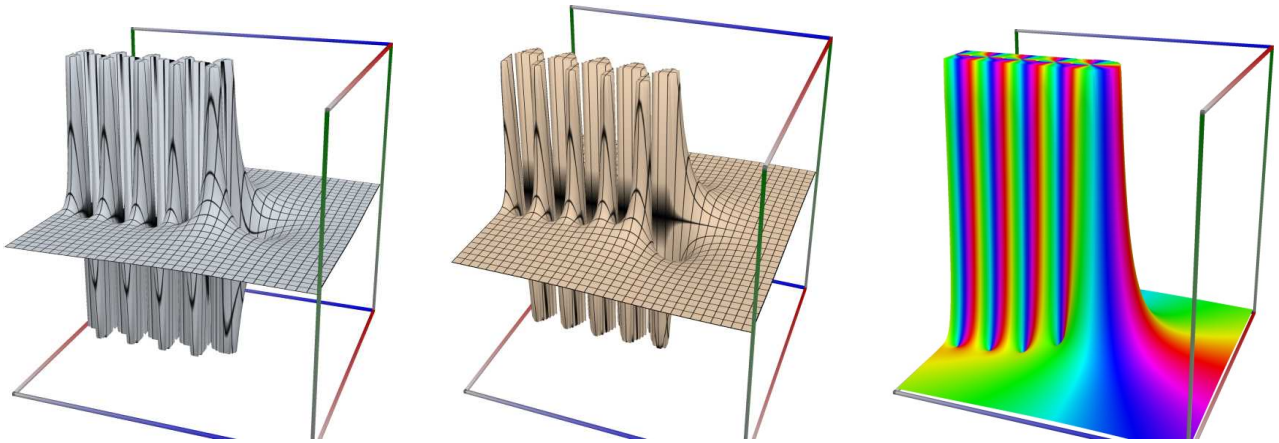

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \leq x \leq 6$ (blue axis), $-6 \leq y \leq 6$ (red axis), $-10 \leq z \leq 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> n = 3; x = -5.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_noipm_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.polygamma(n, x)))
    fpm:  60014.240679133
    mpm:  60014.240679132961234101051156221606575445899464686576165667445794988131081782460282554232 7
    dpm:  60014.240679132961234101051156221606575445899464686576165667445794988131081782460282554232 7
    gpm:  60014.240679132961234101051156221606575445899464686576165667445794988131081782460282554232698
    apm: [60014.240679132961234101051156221606575445899464686576165667445794988131081782460282554 24 +/- 7.28e-84]
 math53:  60014.2406791338
  sreal:  60014.47
  dreal:  60014.2406791338
  ereal:  60014.240679132961429
  qreal:  60014.240679132961234101051156222 3
  oreal:  60014.240679132961234101051156221606575445899464686576165667445794988166
  mreal:  60014.240679132961234101051156221606575445899464686576165667445794988131081782460282554235 1
 sflint:  60014.47
```

(continues on next page)

(continued from previous page)

```
 dflint:  60014.2406791338
 eflint:  60014.240679132961443
 qflint:  60014.240679132961234101051156
 oflint:  60014.240679132961234101051156221606575445899464686576165667445794988165
 mflint:  60014.240679132961234101051156221606575445899464686576165667445794988131081782460282554235
 aflint: [60014.240679132961234101051156221606575445899464686576165667445794988131081782460282554 +/- 6.84e-84]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> n = 3; x = -5.1+2j;  gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.polygamma(n, x)))
    fpm:  (-0.000524225913727169, -0.0112138833424731)
    mpm:  (-0.000524225913727169135135117005976461570523112090102136475800727067033633555934174167418910
↪04, -0.011213883342473116367308886548396628371610786286177)
cmath53:  (-0.000524225913760924, -0.0112138833425053)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> n = 3; x = -5.1+2j;  gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.polygamma(n, x))))
    fpm:  -0.000524225913727169
    mpm:  -0.000524225913727169135135117005976461570523112090102136475800727067033633555934174167418910
04
    dpm:  -0.000524225913727169135135117005976461570523112090102136475800727067033633555934174167418910
04
    gpm:  -0.000524225913727169135135117005976461570523112090102136475800727067033633555934174167418910
04
    apm: [-0.000524225913727169135135117005976461570523112090102136475800727067033633555934174167418910
91 +/- 1.94e-90]
cmath53:  -0.000524225913760924
sflintc:  -0.0005242241
dflintc:  -0.000524225913727162
eflintc:  -0.0005242259137271691334 9
qflintc:  -0.0005242259137271691351351170059764561
oflintc:  -0.00052422591372716913513511700597646157052311209010213647580072706703363329
mflintc:  -0.00052422591372716913513511700597646157052311209010213647580072706703363355934174167418910021
aflintc: [-0.00052422591372716913513511700597646157052311209010213647580072706703363355934174167418910
91 +/- 1.56e-90]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> n = 3; x = -5.1+2j;  gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.polygamma(n, x))))
    fpm:  -0.0112138833424731
    mpm:  -0.011213883342473116367308886548396628371610786286177318124206497905510492660472860849283543
    dpm:  -0.011213883342473116367308886548396628371610786286177318124206497905510492660472860849283543
    gpm:  -0.011213883342473116367308886548396628371610786286177318124206497905510492660472860849283542999
    apm: [-0.011213883342473116367308886548396628371610786286177318124206497905510492660472860849283
54 +/- 5.50e-90]
cmath53:  -0.0112138833425053
sflintc:  -0.01121388
dflintc:  -0.0112138833424731
eflintc:  -0.011213883342473116365
qflintc:  -0.011213883342473116367308886548396 6
oflintc:  -0.011213883342473116367308886548396628371610786286177318124206497905510492
mflintc:  -0.011213883342473116367308886548396628371610786286177318124206497905510492660472860849283543
aflintc: [-0.011213883342473116367308886548396628371610786286177318124206497905510492660472860849283
54 +/- 5.01e-90]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

9.2.2 TriGamma function, $\psi'(x)$

`ctx.trigamma(x)`

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns the trigamma function $\psi'(x), \quad x \neq 0, -1, -2, \ldots$

The function returns the Hurwitz zeta value $\zeta(2, x)$ if x is positive; for $x < 0$ the polygamma reflection formula for $n = 1$ is used to compute the result

$$\psi'(x) = \left(\frac{\pi}{\sin(\pi x)}\right)^2 - \zeta(2, 1 - x).$$

See also Wikipedia [1288], MathWorld [932], NIST [23], BoostMath [131], Ehrhardt [295] (3.5.6.3).

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_noipm_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.trigamma(x)))
    fpm:  103.177737033728
    mpm:  103.17773703372769163949246095375997880233732435567122616082819134938520490578420581390283
    dpm:  103.17773703372769163949246095375997880233732435567122616082819134938520490578420581390283
    gpm:  103.17773703372769163949246095375997880233732435567122616082819134938520490578420581390283
    apm: [103.17773703372769163949246095375997880233732435567122616082819134938520490578420581390283 +/- 5.59e-87]
 math53:  103.177737033728
  sreal:  103.1779
  dreal:  103.177737033728
  ereal:  103.17773703372769181
  qreal:  103.17773703372769163949246095376l
  oreal:  103.17773703372769163949246095375997880233732435567122616082819134938523
  mreal:  103.17773703372769163949246095375997880233732435567122616082819134938520490578420581390283l
 sflint:  103.1779
 dflint:  103.177737033728
 eflint:  103.17773703372769181
 qflint:  103.17773703372769163949246095376l
 oflint:  103.17773703372769163949246095375997880233732435567122616082819134938523
 mflint:  103.17773703372769163949246095375997880233732435567122616082819134938520490578420581390283l
 aflint: [103.17773703372769163949246095375997880233732435567122616082819134938520490578420581390283 +/- 5.25e-87]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.trigamma(x)))
    fpm:  (-0.158277569088854, -0.0561444064628947)
    mpm:  (-0.15827756908885356349806974466301297334751102312693, -0.
↪05614440646289466589787597765555093049371436654929l)
cmath53:  (-0.158277569088852, -0.0561444064628938)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.trigamma(x))))
    fpm:  -0.158277569088854
    mpm:  -0.158277569088853563498069744663012973347511023126932918901567079115380830381344323196950280
    dpm:  -0.158277569088853563498069744663012973347511023126932918901567079115380830381344323196950280
    gpm:  -0.158277569088853563498069744663012973347511023126932918901567079115380830381344323196950280001
    apm: [-0.158277569088853563498069744663012973347511023126932918901567079115380830381344323196950280 +/- 9.72e-91]
cmath53:  -0.158277569088852
sflintc:  -0.1582776
dflintc:  -0.158277569088854
```

(continues on next page)

(continued from previous page)

```
eflintc:  -0.1582775690888535635
qflintc:  -0.158277569088853563498069744663013
oflintc:  -0.15827756908885356349806974466301297334751102312693291890156707911538083
mflintc:  -0.158277569088853563498069744663012973347511023126932918901567079115380830381344323196950280
aflintc: [-0.158277569088853563498069744663012973347511023126932918901567079115380830381344323196950280 +/- 9.50e-91]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.trigamma(x))))
    fpm:  -0.0561444064628947
    mpm:  -0.056144406462894665897875977655550930493714366549291076879671048005885266739471247538926879902
    dpm:  -0.056144406462894665897875977655550930493714366549291076879671048005885266739471247538926879902
    gpm:  -0.056144406462894665897875977655550930493714366549291076879671048005885266739471247538926879902
    apm: [-0.056144406462894665897875977655550930493714366549291076879671048005885266739471247538926879902 +/- 1.12e-90]
cmath53:  -0.0561444064628938
sflintc:  -0.05614441
dflintc:  -0.0561444064628947
eflintc:  -0.056144406462894665899
qflintc:  -0.05614440646289466589878759776555509
oflintc:  -0.056144406462894665897875977655550930493714366549291076879671048005885267
mflintc:  -0.056144406462894665897875977655550930493714366549291076879671048005885266739471247538926879902
aflintc: [-0.056144406462894665897875977655550930493714366549291076879671048005885266739471247538926879902 +/- 9.57e-91]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

9.2.3 DiGamma function $\psi(x)$

`ctx.digamma(x)`

where `ctx` is `math53`, `mathc53`, `ctxboost`, `ctxflint`.

Returns the digamma function $\psi(x) = \dfrac{\mathrm{d}(\log\Gamma(x)}{\mathrm{d}x} = \dfrac{\Gamma'(x)}{\Gamma(x)}, \quad x \neq 0, -1, -2, \ldots$.

See also Wikipedia [1270], MathWorld [913], NIST [23], BoostMath [117], Ehrhardt [295] (3.5.6.1), Ehrhardt [295] (4.2.50), Flint [735], Flint [725], Mpmath [604].

This function returns the digamma or ψ function, which is defines as

$$\psi(x) = \frac{d(\log\Gamma(x))}{\mathrm{d}x} = \frac{\Gamma'(x)}{\Gamma(x)}, \quad x \neq 0, -1, -2, \ldots$$

If $x < 0$ it is transformed to positive values with the reflection formula

$$\psi(1 - x) = \psi(x) + \pi\cot(\pi x)$$

and for $0 < x < 12$ the recurrence formula

$$\psi(x + 1) = \psi(x) + \frac{1}{x}$$

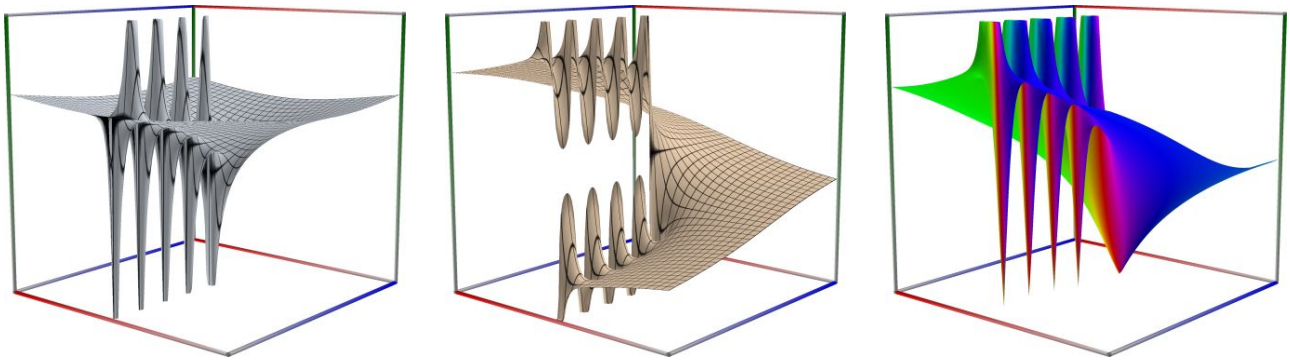

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \leq x \leq 6$ (blue axis), $-6 \leq y \leq 6$ (red axis), $-10 \leq z \leq 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = -5.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_noipm_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.digamma(x)))
    fpm:  11.3929159508926
    mpm:  11.392915950892563475589824681034358205660820639737918434775306568519978694422886714474036
    dpm:  11.392915950892563475589824681034358205660820639737918434775306568519978694422886714474036
    gpm:  11.392915950892563475589824681034358205660820639737918434775306568519978694422886714474035999
    apm: [11.392915950892563475589824681034358205660820639737918434775306568519978694422886714474036 +/- 1.89e-88]
 math53:  11.3929159508926
  sreal:  11.39293
  dreal:  11.3929159508926
  ereal:  11.392915950892563485
  qreal:  11.392915950892563475598246810344
  oreal:  11.392915950892563475589824681034358205660820639737918434775306568519978
  mreal:  11.392915950892563475589824681034358205660820639737918434775306568519978694422886714474036
 sflint:  11.39293
 dflint:  11.3929159508926
 eflint:  11.392915950892563485
```

(continues on next page)

(continued from previous page)

```
 qflint:  11.392915950892563475589824681034358205660820639737918434775306568519978694422886714474036
 oflint:  11.392915950892563475589824681034358205660820639737918434775306568519978694422886714474036
 mflint:  11.392915950892563475589824681034358205660820639737918434775306568519978694422886714474036
 aflint: [11.392915950892563475589824681034358205660820639737918434775306568519978694422886714474036 +/- 1.67e-88]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.digamma(x)))
    fpm:  (1.7837140682953, 2.79932726862651)
    mpm:  (1.7837140682953037106936654419329450623187548800597, 2.799327268626512861415899844264329356264346293465759231370437750919881827036988832060011115)
cmath53:  (1.7837140682953, 2.79932726862651)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.digamma(x))))
    fpm:  1.7837140682953
    mpm:  1.783714068295303710693665441932945062318754880059713751096455213151111067054020546983282950001
    dpm:  1.783714068295303710693665441932945062318754880059713751096455213151111067054020546983282950001
    gpm:  1.783714068295303710693665441932945062318754880059713751096455213151111067054020546983282950001
    apm: [1.783714068295303710693665441932945062318754880059713751096455213151111067054020546983282950001 +/- 5.48e-89]
cmath53:  1.7837140682953
sflintc:  1.783714
dflintc:  1.7837140682953
eflintc:  1.7837140682953037107
qflintc:  1.7837140682953037106936654419329450623187548800597137510964552131511107
oflintc:  1.7837140682953037106936654419329450623187548800597137510964552131511107
mflintc:  1.7837140682953037106936654419329450623187548800597137510964552131511107
aflintc: [1.7837140682953037106936654419329450623187548800597137510964552131511107 +/- 4.40e-89]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.digamma(x))))
    fpm:  2.79932726862651
    mpm:  2.799327268626512861415899844264329356264346293465759231370437750919881827036988832060011115
    dpm:  2.799327268626512861415899844264329356264346293465759231370437750919881827036988832060011115
    gpm:  2.799327268626512861415899844264329356264346293465759231370437750919881827036988832060011115
    apm: [2.799327268626512861415899844264329356264346293465759231370437750919881827036988832060011115 +/- 2.03e-88]
cmath53:  2.79932726862651
sflintc:  2.799327
dflintc:  2.79932726862651
eflintc:  2.7993272686265128614
qflintc:  2.799327268626512861415899844264329356264346293465759231370437750919881827036988832060011115
oflintc:  2.799327268626512861415899844264329356264346293465759231370437750919881827036988832060011115
mflintc:  2.799327268626512861415899844264329356264346293465759231370437750919881827036988832060011115
aflintc: [2.799327268626512861415899844264329356264346293465759231370437750919881827036988832060011115 +/- 9.14e-89]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

9.2.4 Harmonic number function, H_x

`ctx.harmonic(x)`

Returns the Harmonic number $H_x = \psi(x+1) + \gamma, \quad x \neq -1, -2, \ldots$.

See also: Wikipedia [1279], MathWorld [919], Ehrhardt [295] (3.6.20), Mpmath [611].

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.harmonic(x)))
    fpm:  2.30130362533007
    mpm:  2.301303625330070932914504579289230752004297564833799122481709651560077126099241171031762 5
    dpm:  2.301303625330070932914504579289230752004297564833799122481709651560077126099241171031762 5
    gpm:  2.301303625330070932914504579289230752004297564833799122481709651560077126099241171031762 5
    apm: [2.301303625330070932914504579289230752004297564833799122481709651560077126099241171031762 5 +/- 1.40e-89]
 math53:  2.30130362533007
 sflint:  2.301304
 dflint:  2.30130362533007
 eflint:  2.3013036253300709329
 qflint:  2.30130362533007093291450457928923
 oflint:  2.301303625330070932914504579289230752004297564833799122481709651560077 1
 mflint:  2.301303625330070932914504579289230752004297564833799122481709651560077126099241171031762 5
 aflint: [2.301303625330070932914504579289230752004297564833799122481709651560077126099241171031762 5 +/- 1.44e-89]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.harmonic(x)))
    fpm:  (2.19098638098091, 2.73268281677713)
    mpm:  (2.1909863809809085473081748662372735180193614002715, 2.732682816777129322595506641998417993385305973572390354329451413032510950662447012666475 64)
cmath53:  (2.19098638098091, 2.73268281677713)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.harmonic(x))))
    fpm:  2.19098638098091
    mpm:  2.190986380980908547308174866237273518019361400271546713447707286423182662562788501316261 07
    dpm:  2.190986380980908547308174866237273518019361400271546713447707286423182662562788501316261 07
    gpm:  2.190986380980908547308174866237273518019361400271546713447707286423182662562788501316261 0702
    apm: [2.190986380980908547308174866237273518019361400271546713447707286423182662562788501316 +/- 3.59e-85]
cmath53:  2.19098638098091
sflintc:  2.190986
dflintc:  2.19098638098091
eflintc:  2.1909863809809085474
qflintc:  2.190986380980908547308174866237 27
oflintc:  2.190986380980908547308174866237273518019361400271546713447707286423182 7
mflintc:  2.190986380980908547308174866237273518019361400271546713447707286423182662562788501316261 07
aflintc: [2.190986380980908547308174866237273518019361400271546713447707286423182662562788501316 +/- 3.39e-85]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.harmonic(x))))
    fpm:  2.73268281677713
    mpm:  2.732682816777129322595506641998417993385305973572390354329451413032510950662447012666475 66
    dpm:  2.732682816777129322595506641998417993385305973572390354329451413032510950662447012666475 66
    gpm:  2.732682816777129322595506641998417993385305973572390354329451413032510950662447012666475 6599
```

(continues on next page)

(continued from previous page)

```
    apm: [2.732682816777129322595506641998417993385305973572390354329451413032510950662447012666 +/- 5.73e-85]
cmath53:  2.73268281677713
sflintc:  2.732683
dflintc:  2.73268281677713
eflintc:  2.7326828167771293227
qflintc:  2.732682816777129322595506641998417
oflintc:  2.7326828167771293225955066419984179933853059735723903543294514130325109
mflintc:  2.732682816777129322595506641998417993385305973572390354329451413032510950662447012666647566
aflintc: [2.732682816777129322595506641998417993385305973572390354329451413032510950662447012666 +/- 5.54e-85]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

9.3 Polylogarithm and related functions

9.3.1 Polylogarithm, $\mathrm{Li}_s(z)$

`ctx.polylog`(x, s)

where `ctx` is `math53`, `ctxflint`.

Returns the polylogarithm of real order s, $\mathrm{Li}_s(x) = \sum_{k=1}^{\infty} \frac{x^k}{k^s}$, $s \geq -1, |x| \leq 1$, or its analytic continuation. For $s \leq 1$ there is the additional arguments restriction $z \neq 1$.

See also Wikipedia [1326], MathWorld [964], NIST [18], Ehrhardt [295] (3.6.12), Flint [770], Mpmath [657].

Special cases are $\mathrm{Li}_s(0) = 0$, $\mathrm{Li}_s(1) = \zeta(s)$, $\mathrm{Li}_s(-1) = -\eta(s)$. For $x > 1$ the real part of $\mathrm{Li}_s(x)$ is returned.

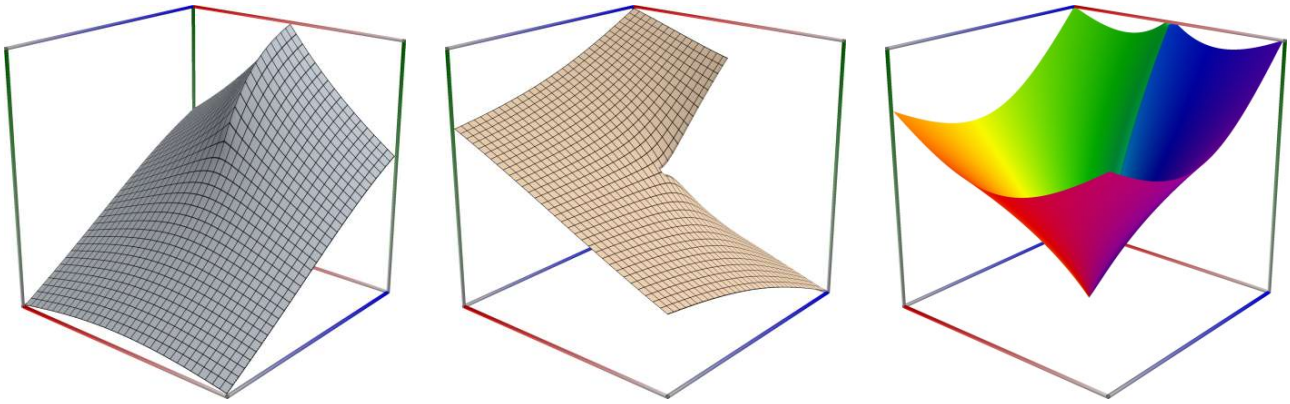

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \leq x \leq 6$ (blue axis), $-6 \leq y \leq 6$ (red axis), $-10 \leq z \leq 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> s = 3; z = -5.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.polylog(s, z)))
    fpm:  -3.59230678081745
    mpm:  -3.592306780817449052682958419117685067757078537284118987955423033842532256626733215603854870 2
    dpm:  -3.592306780817449052682958419117685067757078537284118987955423033842532256626733215603854870 2
    gpm:  -3.592306780817449052682958419117685067757078537284118987955423033842532256626733215603854870 2
    apm: ([-3.592306780817449052682958419117685067757078537284118987955423033842532256626733215604 +/- 2.12e-85], 0)
 math53:  -3.59230678081745
 sflint:  -3.592307
 dflint:  -3.59230678081745
 eflint:  -3.5923067808174490526
 qflint:  -3.592306780817449052682958419117 68
 oflint:  -3.592306780817449052682958419117685067757078537284118987955423033842532256626733215603 22
 mflint:  -3.592306780817449052682958419117685067757078537284118987955423033842532256626733215603852 6
 aflint: [-3.592306780817449052682958419117685067757078537284118987955423033842532256626733215604 +/- 3.70e-85]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> s = 3; z = -5.1+2j;  gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.polylog(s, z)))
    fpm:  (-3.6657967998322, 1.08257770822294)
    mpm:  (-3.665796799832204521074143006736652773167311 2148532, 1.0825777082229407771765495069960308915177005851599)
cmath53:  (-3.6657967998322, 1.08257770822294)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> s = 3; z = -5.1+2j;  gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.polylog(s, z))))
    fpm:  -3.6657967998322
    mpm:  -3.665796799832204521074143006736652773167311214853155557717855920802669046391362487392 39217266
    dpm:  -3.665796799832204521074143006736652773167311214853155557717855920802669046391362487392 39217266
    gpm:  -3.665796799832204521074143006736652773167311214853155557717855920802669046391362487392 3921726599
    apm: [-3.665796799832204521074143006736652773167311214853155557717855920802669046391362487392 +/- 4.46e-85]
cmath53:  -3.6657967998322
sflintc:  -3.665797
dflintc:  -3.6657967998322
eflintc:  -3.6657967998322045211
qflintc:  -3.665796799832204521074143006736652
oflintc:  -3.665796799832204521074143006736652773167311214853155557717855920802669
mflintc:  -3.665796799832204521074143006736652773167311214853155557717855920802669046391362487392 17202
aflintc: [-3.665796799832204521074143006736652773167311214853155557717855920802669046391362487392 +/- 3.18e-84]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> s = 3; z = -5.1+2j;  gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.polylog(s, z))))
    fpm:  1.08257770822294
    mpm:  1.08257770822294077717654950699603089151770058515991635625785362032811000578169041759347163
    dpm:  1.08257770822294077717654950699603089151770058515991635625785362032811000578169041759347163
    gpm:  1.08257770822294077717654950699603089151770058515991635625785362032811000578169041759347163 01
    apm: [1.08257770822294077717654950699603089151770058515991635625785362032811000578169041759347163 +/- 7.61e-85]
cmath53:  1.08257770822294
sflintc:  1.082578
dflintc:  1.08257770822294
eflintc:  1.0825777082229407772
qflintc:  1.0825777082229407771765495069960 3
oflintc:  1.0825777082229407771765495069960308915177005851599163562578536203281 811
mflintc:  1.0825777082229407771765495069960308915177005851599163562578536203281100057816904175934717 7
aflintc: [1.0825777082229407771765495069960308915177005851599163562578536203281100057816904175 +/- 4.49e-84]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

9.3.2 Trilogarithm Function, $\mathrm{Li}_3(z)$

`ctx.trilog(x)`

Returns the trilogarithm $\mathrm{trilog}(x) = \Re\mathrm{Li}_3(x)$. See also Wikipedia [1330], MathWorld [950], NIST [16], Ehrhardt [295] (3.6.14), Mpmath [657].

An example with real input:

```
>>> from xlcalcnet import *
>>> z = -5.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.trilog(z)))
    fpm:  -3.59230678081745
    mpm:  -3.59230678081744905268295841911768506775078537284118987955423033842532256626733215603854870 2
    dpm:  -3.59230678081744905268295841911768506775078537284118987955423033842532256626733215603854870 2
    gpm:  -3.59230678081744905268295841911768506775078537284118987955423033842532256626733215603854870 2
    apm: [-3.59230678081744905268295841911768506775078537284118987955423033842532256626733215604 +/- 2.12e-85]
 math53:  -3.59230678081745
 sflint:  -3.592307
 dflint:  -3.59230678081745
 eflint:  -3.5923067808174490526
 qflint:  -3.592306780817449052682958419117685067757078537284118987955423033842532
 oflint:  -3.592306780817449052682958419117685067757078537284118987955423033842532256626733215603854870 2
 mflint:  -3.592306780817449052682958419117685067757078537284118987955423033842532256626733215603854870 2
 aflint: [-3.592306780817449052682958419117685067757078537284118987955423033842532256626733215604 +/- 3.70e-85]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> z = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.trilog(z)))
    fpm:  (-3.6657967998322, 1.08257770822294)
    mpm:  (-3.665796799832204521074143006736652773167311214853155557717855920802669046391362487392, 1.0825777082229407771765495069960308915177005851599)
cmath53:  (-3.6657967998322, 1.08257770822294)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> z = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.trilog(z))))
    fpm:  -3.6657967998322
    mpm:  -3.665796799832204521074143006736652773167311214853155557717855920802669046391362487392172662
    dpm:  -3.665796799832204521074143006736652773167311214853155557717855920802669046391362487392172662
    gpm:  -3.665796799832204521074143006736652773167311214853155557717855920802669046391362487392172659
    apm: [-3.665796799832204521074143006736652773167311214853155557717855920802669046391362487392 +/- 4.46e-85]
cmath53:  -3.6657967998322
sflintc:  -3.665797
dflintc:  -3.6657967998322
eflintc:  -3.6657967998322045211
qflintc:  -3.665796799832204521074143006736652
oflintc:  -3.665796799832204521074143006736652773167311214853155557717855920802669
mflintc:  -3.665796799832204521074143006736652773167311214853155557717855920802669046391362487392172 02
aflintc: [-3.665796799832204521074143006736652773167311214853155557717855920802669046391362487392 +/- 3.18e-84]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> z = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.trilog(z))))
    fpm:  1.08257770822294
    mpm:  1.0825777082229407771765495069960308915177005851599163562578536203281100057816904175934716 3
    dpm:  1.0825777082229407771765495069960308915177005851599163562578536203281100057816904175934716 3
    gpm:  1.0825777082229407771765495069960308915177005851599163562578536203281100057816904175934716 3
    apm: [1.0825777082229407771765495069960308915177005851599163562578536203281100057816904175934716 3 +/- 7.61e-85]
```

(continues on next page)

(continued from previous page)

```
cmath53:  1.08257770822294
sflintc:  1.082578
dflintc:  1.08257770822294
eflintc:  1.0825777082229407772
qflintc:  1.08257770822294077717654950699603
oflintc:  1.082577708222940777176549506996030891517700585159916356257853620328110005781690417593471777
mflintc:  1.08257770822294077717654950699603089151770058515991635625785362032811000578169041759347177
aflintc: [1.08257770822294077717654950699603089151770058515991635625785362032811000578169041759 +/- 4.49e-84]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

9.3.3 Dilogarithm Function, $\mathrm{Li}_2(z)$

`ctx.dilog(x)`

where `ctx` is `math53`, `mathc53` or `ctxflint`.

Returns the dilogarithm $\mathrm{dilog}(x) = \Re\mathrm{Li}_2(x) = -\Re\int_0^x \frac{\log(1-t)}{t}\,\mathrm{d}t$.

See also Wikipedia [1330], MathWorld [950], NIST [16], Ehrhardt [295] (3.6.13), Ehrhardt [295] (4.2.25), Flint [769], Mpmath [657].

Note that there is some confusion about the naming: some authors and/or computer algebra systems use $\mathrm{dilog}(x) = \mathrm{Li}_2(1-x)$ and then call $\mathrm{Li}_2(x)$ Spence function/integral or similar.

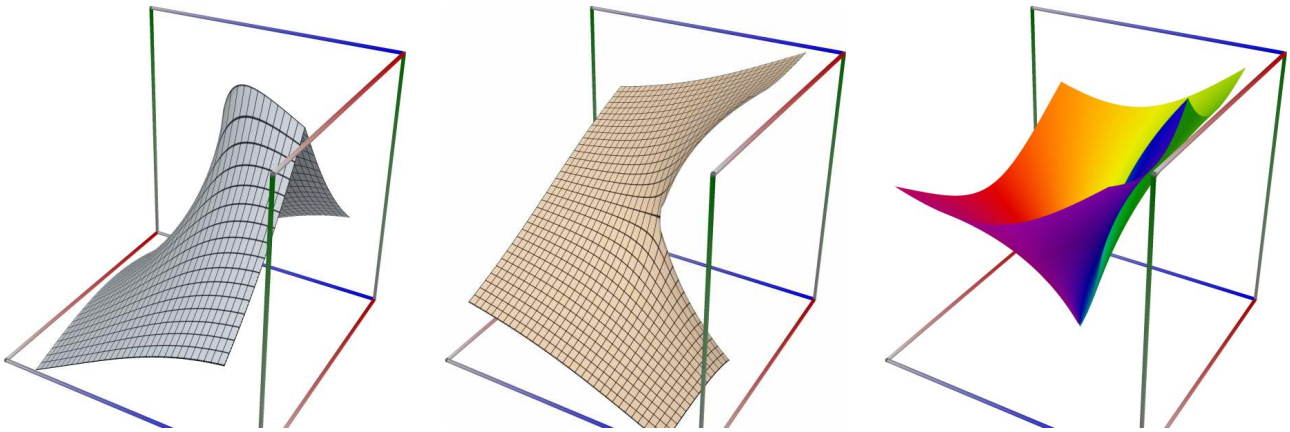

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> z = -5.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.dilog(z)))
    fpm:  -2.78492424355145
    mpm:  -2.784924243551450236746837890143430221767842518378450923023632536494193173962047930660750 53
    dpm:  -2.784924243551450236746837890143430221767842518378450923023632536494193173962047930660750 53
    gpm:  -2.784924243551450236746837890143430221767842518378450923023632536494193173962047930660750 7505301
    apm: [-2.784924243551450236746837890143430221767842518378450923023632536494193173962047930660750 53 +/- 6.01e-90]
 math53:  -2.78492424355145
 sflint:  -2.784924
 dflint:  -2.78492424355145
 eflint:  -2.7849242435514502368
 qflint:  -2.7849242435514502367468378901434 3
 oflint:  -2.7849242435514502367468378901434302217678425183784509230236325364941932
 mflint:  -2.784924243551450236746837890143430221767842518378450923023632536494193173962047930660750 52
 aflint: [-2.784924243551450236746837890143430221767842518378450923023632536494193173962047930660750 52 +/- 6.29e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> z = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.dilog(z)))
    fpm:  (-2.8572793756887, 0.69714968425694)
    mpm:  (-2.8572793756887021669801494465599471426459186349772, 0.69714968425694008041041348380021789329105112919996)
cmath53:  (-2.8572793756887, 0.69714968425694)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> z = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.dilog(z))))
    fpm:  -2.8572793756887
    mpm:  -2.857279375688702166980149446559947142645918634977198937744297493204785862582858802274667 74
    dpm:  -2.857279375688702166980149446559947142645918634977198937744297493204785862582858802274667 74
    gpm:  -2.857279375688702166980149446559947142645918634977198937744297493204785862582858802274667 74
    apm: [-2.857279375688702166980149446559947142645918634977198937744297493204785862582858802274667 74 +/- 1.15e-90]
cmath53:  -2.8572793756887
sflintc:  -2.857279
dflintc:  -2.8572793756887
eflintc:  -2.8572793756887021669
qflintc:  -2.857279375688702166980149446559 95
oflintc:  -2.857279375688702166980149446559947142645918634977198937744297493204785 9
mflintc:  -2.857279375688702166980149446559947142645918634977198937744297493204785862582858802274667 74
aflintc: [-2.857279375688702166980149446559947142645918634977198937744297493204785862582858802274667 74 +/- 3.60e-90]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> z = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.dilog(z))))
    fpm:  0.69714968425694
    mpm:  0.697149684256940080410413483800217893291051129199962089441280579605082594964114817555508751
    dpm:  0.697149684256940080410413483800217893291051129199962089441280579605082594964114817555508751
    gpm:  0.697149684256940080410413483800217893291051129199962089441280579605082594964114817555508751
    apm: [0.697149684256940080410413483800217893291051129199962089441280579605082594964114817555508751 +/- 8.31e-91]
cmath53:  0.69714968425694
sflintc:  0.6971497
dflintc:  0.69714968425694
eflintc:  0.69714968425694008044
qflintc:  0.697149684256940080410413483800218
oflintc:  0.69714968425694008040410413483800217893291051129199962089441280579605082 6
mflintc:  0.697149684256940080410413483800217893291051129199962089441280579605082594964114817555508751
aflintc: [0.697149684256940080410413483800217893291051129199962089441280579605082594964114817555508 75 +/- 1.32e-90]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

9.3.4 Generalized Clausen sine function

`ctx.clausen_sin`(s, z)

Returns the Clausen sine function. See also Wikipedia [1350], MathWorld [1015], Mpmath [695].

Computes the Clausen sine function, defined formally by the series

$$\mathrm{Cl}_s(z) = \sum_{k=1}^{\infty} \frac{\sin(kz)}{k^s}.$$

The special case $\mathrm{Cl}_2(z)$ (i.e. `clsin(2,z)`) is the classical "Clausen function". More generally, the Clausen function is defined for complex s and z, even when the series does not converge. The Clausen function is related to the polylogarithm (*polylog()*) as

$$\begin{aligned}\mathrm{Cl}_s(z) &= \frac{1}{2i}\left(\mathrm{Li}_s\left(e^{iz}\right) - \mathrm{Li}_s\left(e^{-iz}\right)\right) \\ &= \mathrm{Im}\left[\mathrm{Li}_s(e^{iz})\right] \quad (s, z \in \mathbb{R}),\end{aligned}$$

and this representation can be taken to provide the analytic continuation of the series. The complementary function *clcos()* gives the corresponding cosine sum.

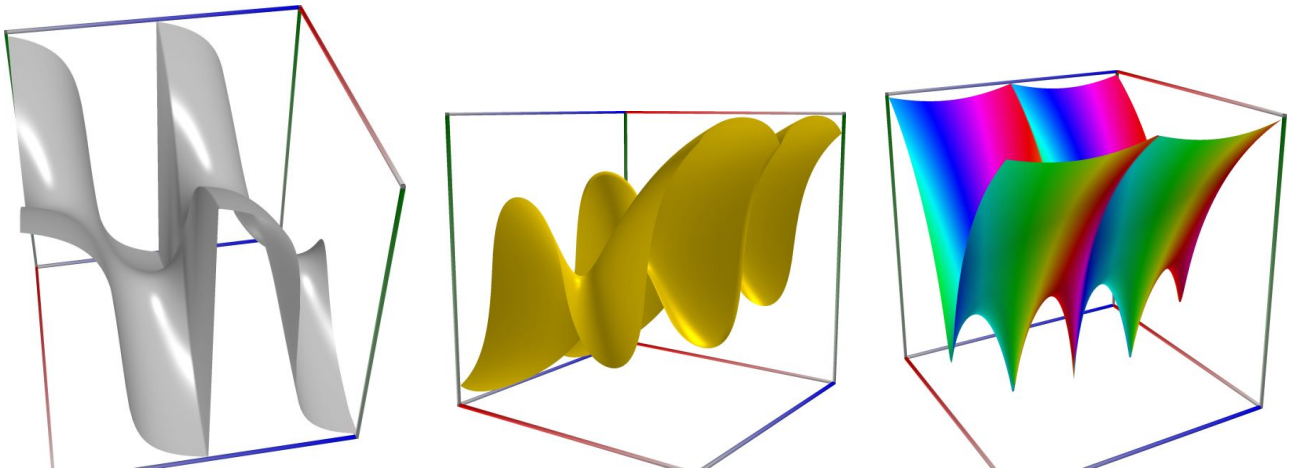

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> s = 3; z = -5.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.clausen_sin(s, z)))
    fpm:  0.984792489041676
    mpm:  0.984792489041675707094021249880239039475449523281953568438230241694538082819749557027289059
    dpm:  0.984792489041675707094021249880239039475449523281953568438230241694538082819749557027289059
    gpm:  0.984792489041675707094021249880239039475449523281953568438230241694538082819749557027289059
    apm: [0.984792489041675707094021249880239039475449523281953568438230241694538082819749557027 +/- 6.32e-85]
 math53:  0.984792489041676
 sflint:  0.9847925
 dflint:  0.984792489041676
 eflint:  0.9847924890416757071
 qflint:  0.984792489041675707094021249880239
 oflint:  0.984792489041675707094021249880239039475449523281953568438230241694538
 mflint:  0.984792489041675707094021249880239039475449523281953568438230241694538082819749557027288946
 aflint: [0.984792489041675707094021249880239039475449523281953568438230241694538082819749557027 +/- 8.40e-85]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> s = 3; z = -5.1+2j;  gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.clausen_sin(s, z)))
    fpm:  (2.94319983545188, -0.393921066278159)
    mpm:  (2.943199835451882468631377866600736155278280123906847747463285649386721676533540558399763433080106612)
cmath53:  (2.94319983545188, -0.39392106627816)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> s = 3; z = -5.1+2j;  gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.clausen_sin(s, z))))
    fpm:  2.94319983545188
    mpm:  2.943199835451882468631377866600736155278280123906847747463285649386721676533540558399254229
    dpm:  2.943199835451882468631377866600736155278280123906847747463285649386721676533540558399254229
    gpm:  2.943199835451882468631377866600736155278280123906847747463285649386721676533540558399254229
    apm: [2.943199835451882468631377866600736155278280123906847747463285649386721676533540558399 +/- 5.72e-85]
cmath53:  2.94319983545188
sflintc:  2.9432
dflintc:  2.94319983545188
eflintc:  2.9431998354518824686
qflintc:  2.9431998354518824686863137786660074
oflintc:  2.9431998354518824686863137786660073615527828012390684774746328564938672167653354055839925423
mflintc:  2.9431998354518824686863137786660073615527828012390684774746328564938672167653354055839925423
aflintc: [2.943199835451882468631377866600736155278280123906847747463285649386721676533540558400 +/- 1.73e-84]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> s = 3; z = -5.1+2j;  gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.clausen_sin(s, z))))
    fpm:  -0.393921066278159
    mpm:  -0.393921066278159309881317588100080997634330801066109478167767628696515397919930812002386474
    dpm:  -0.393921066278159309881317588100080997634330801066109478167767628696515397919930812002386474
    gpm:  -0.393921066278159309881317588100080997634330801066109478167767628696515397919930812002386474
    apm: [-0.393921066278159309881317588100080997634330801066109478167767628696515397919930812002 +/- 7.44e-85]
cmath53:  -0.39392106627816
sflintc:  -0.3939213
dflintc:  -0.39392106627816
eflintc:  -0.39392106627815931004
qflintc:  -0.393921066278159309881317588100082
oflintc:  -0.393921066278159309881317588100080997634330801066109478167767628696515
mflintc:  -0.393921066278159309881317588100080997634330801066109478167767628696515397919930812002385891
aflintc: [-0.393921066278159309881317588100080997634330801066109478167767628696515397919930812000 +/- 3.33e-84]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

9.3.5 Generalized Clausen cosine function

`ctx.clausen_cos`(s, z)

Returns the Clausen cosine function. See also Wikipedia [1350], MathWorld [1015], Mpmath [694].

Computes the Clausen cosine function, defined formally by the series

$$\widetilde{\mathrm{Cl}}_s(z) = \sum_{k=1}^{\infty} \frac{\cos(kz)}{k^s}.$$

This function is complementary to the Clausen sine function *clsin()*. In terms of the polylogarithm,

$$\begin{aligned}\widetilde{\mathrm{Cl}}_s(z) &= \frac{1}{2}\left(\mathrm{Li}_s\left(e^{iz}\right) + \mathrm{Li}_s\left(e^{-iz}\right)\right) \\ &= \mathrm{Re}\left[\mathrm{Li}_s(e^{iz})\right] \quad (s, z \in \mathbb{R}).\end{aligned}$$

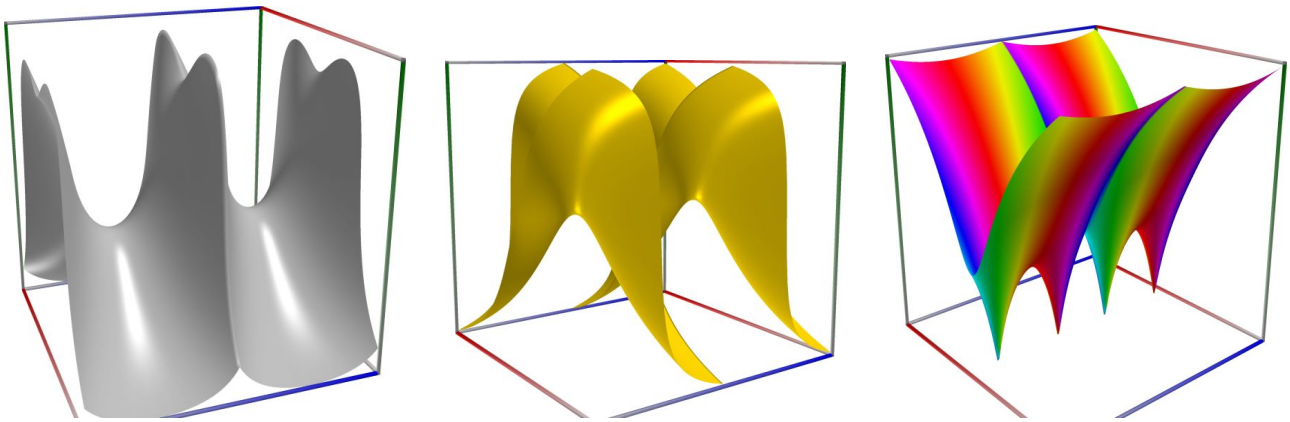

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> s = 3; z = -5.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.clausen_cos(s, z)))
    fpm:  0.263015360836684
    mpm:  0.263015360836683999575663792621316298941092111811794747998617149962662412816883329886667947
    dpm:  0.263015360836683999575663792621316298941092111811794747998617149962662412816883329886667947
    gpm:  0.263015360836683999575663792621316298941092111811794747998617149962662412816883329886667947 02
    apm: [0.263015360836683999575663792621316298941092111811794747998617149962662412816883329887 +/- 9.15e-85]
 math53:  0.263015360836684
 sflint:  0.2630153
 dflint:  0.263015360836684
 eflint:  0.2630153608366839995
 qflint:  0.263015360836683999575663792621316
 oflint:  0.263015360836683999575663792621316298941092111811794747998617149962662 4
 mflint:  0.263015360836683999575663792621316298941092111811794747998617149962662412816883329886666804
 aflint: [0.263015360836683999575663792621316298941092111811794747998617149962662412816883329 89 +/- 4.49e-84]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> s = 3; z = -5.1+2j;  gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.clausen_cos(s, z)))
    fpm:  (-0.344486427690057, -2.81634388274335)
    mpm:  (-0.34448642769005725777877641350491241801056063322657 5, -2.816343882743345449615096685178161111081124141861 1)
cmath53:  (-0.344486427690058, -2.81634388274334)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> s = 3; z = -5.1+2j;  gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.clausen_cos(s, z))))
    fpm:  -0.344486427690057
    mpm:  -0.344486427690057257787764135049124180105606332265745854129961424362331225453989888515278536
    dpm:  -0.344486427690057257787764135049124180105606332265745854129961424362331225453989888515278536
    gpm:  -0.344486427690057257787764135049124180105606332265745854129961424362331225453989888851527853602
    apm: [-0.344486427690057257787764135049124180105606332265745854129961424362331225453989888515 +/- 6.36e-85]
cmath53:  -0.344486427690058
sflintc:  -0.3444866
dflintc:  -0.344486427690058
eflintc:  -0.34448642769005725797
qflintc:  -0.344486427690057257787764135049125
oflintc:  -0.344486427690057257787764135049124180105606332265745854129961424362331225453989888515277956
mflintc:  -0.344486427690057257787764135049124180105606332265745854129961424362331225453989888515277956
aflintc: [-0.344486427690057257787764135049124180105606332265745854129961424362331225453989888852 +/- 5.67e-84]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> s = 3; z = -5.1+2j;  gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.clausen_cos(s, z))))
    fpm:  -2.81634388274335
    mpm:  -2.816343882743345449615096685178161111081124141861094707604434072236226745732285891393840074
    dpm:  -2.816343882743345449615096685178161111081124141861094707604434072236226745732285891393840074
    gpm:  -2.816343882743345449615096685178161111081124141861094707604434072236226745732285891393840074
    apm: [-2.816343882743345449615096685178161111081124141861094707604434072236226745732285891394 +/- 4.77e-85]
cmath53:  -2.81634388274334
sflintc:  -2.816344
dflintc:  -2.81634388274334
eflintc:  -2.8163438827433454495
qflintc:  -2.816343882743345449615096685178161111081124141861094707604434072236226745732285891393840074
oflintc:  -2.816343882743345449615096685178161111081124141861094707604434072236226745732285891393840074
mflintc:  -2.816343882743345449615096685178161111081124141861094707604434072236226745732285891393840075
aflintc: [-2.816343882743345449615096685178161111081124141861094707604434072236226745732285891393840075
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

9.3.6 Classical Clausen function, $\mathrm{Cl}_2(x)$

`ctx.clausen2(x)`

Returns the Clausen function $\mathrm{Cl}_2(x) = \Im \mathrm{Li}_2(e^{ix}) = \int_0^x \log|2\sin(t/2)|\,\mathrm{d}t$.

See also: Wikipedia [1350], MathWorld [1015], Ehrhardt [295] (3.6.15), Mpmath [694].

An example with real input:

```
>>> from xlcalcnet import *
>>> z = -5.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.clausen2(z)))
    fpm:  1.00733027926371
    mpm:  1.00733027926371335731903919114910196644495848163260043631927853333772301585636178945990179
    dpm:  1.00733027926371335731903919114910196644495848163260043631927853333772301585636178945990179
    gpm:  1.00733027926371335731903919114910196644495848163260043631927853333772301585636178945990179017901
    apm: [1.00733027926371335731903919114910196644495848163260043631927853333772301585636178945990179 +/- 7.67e-90]
 math53:  1.00733027926371
 sflint:  1.00733
 dflint:  1.00733027926371
 eflint:  1.0073302792637133573
 qflint:  1.00733027926371335731903919114910
 oflint:  1.00733027926371335731903919114910196644495848163260043631927853333772
 mflint:  1.00733027926371335731903919114910196644495848163260043631927853333772301585636178945990179
 aflint: [1.00733027926371335731903919114910196644495848163260043631927853333772301585636178945990179 +/- 1.96e-89]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> z = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.clausen2(z)))
    fpm:  (2.08677665798307, -0.911259782750703)
    mpm:  (2.0867766579830742983728938589197577049903840682259, -0.91125978275070287331460388989466652560123973103466)
cmath53:  (2.08677665798307, -0.911259782750703)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> z = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.clausen2(z))))
    fpm:  2.08677665798307
    mpm:  2.086776657983074298372893858919757704990384068225954338567444995390901154099269235315761 42
    dpm:  2.086776657983074298372893858919757704990384068225954338567444995390901154099269235315761 42
    gpm:  2.086776657983074298372893858919757704990384068225954338567444995390901154099269235315761 42
    apm: [2.086776657983074298372893858919757704990384068225954338567444995390901154099269235315761 42 +/- 7.55e-90]
cmath53:  2.08677665798307
sflintc:  2.086776
dflintc:  2.08677665798307
eflintc:  2.0867766579830742983
qflintc:  2.086776657983074298372893858919 76
oflintc:  2.086776657983074298372893858919757704990384068225954338567444995390901 1
mflintc:  2.086776657983074298372893858919757704990384068225954338567444995390901154099269235315761 41
aflintc: [2.086776657983074298372893858919757704990384068225954338567444995390901154099269235315761 4 +/- 2.39e-89]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> z = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.clausen2(z))))
    fpm:  -0.911259782750703
    mpm:  -0.91125978275070287331460388989466652560123973103465669875767141109868442588137479429393706 9
    dpm:  -0.91125978275070287331460388989466652560123973103465669875767141109868442588137479429393706 9
```

(continues on next page)

(continued from previous page)

```
    gpm:  -0.91125978275070287331460388989466652560123973103465669875767141109868442588137479429393706905
    apm: [-0.91125978275070287331460388989466652560123973103465669875767141109868442588137479429393707 +/- 3.21e-90]
cmath53:  -0.911259782750703
sflintc:  -0.9112599
dflintc:  -0.911259782750703
eflintc:  -0.9112597827507028734
qflintc:  -0.91125978275070287331460388989466652560123973103465669875767141109868444
oflintc:  -0.911259782750702873314603889894666525601239731034656698757671411098684425881374794293937069
mflintc:  -0.911259782750702873314603889894666525601239731034656698757671411098684425881374794293937069
aflintc: [-0.91125978275070287331460388989466652560123973103465669875767141109868442588137479429393707 +/- 8.42e-90]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

9.3.7 Bose-Einstein integrals, $G_s(x)$

`ctx.bose_einstein(s, x)`

Returns the Bose-Einstein integral of real order s, $G_s(x) = \dfrac{1}{\Gamma(s+1)} \displaystyle\int_0^\infty \frac{t^s}{e^{t-x}-1} = \mathrm{Li}_{s+1}(e^x)$. If $x > 0$ the real part of $G_s(x)$ is returned.

See also: MathWorld [946], Ehrhardt [295] (3.6.7), NIST [15].

$$G_s(x) = \frac{1}{\Gamma(s+1)} \int_0^\infty \frac{t^s}{e^{t-x}-1} \mathrm{d}t,$$

An example with real input:

```
>>> from xlcalcnet import *
>>> s = 3; z = -5.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.bose_einstein(s, z)))
    fpm:  0.00609907251359716
    mpm:  0.006099072513597157789483451433284889523910851921570533287481871470539549841018284238557887 72
    dpm:  0.006099072513597157789483451433284889523910851921570533287481871470539549841018284238557887 72
    gpm:  0.006099072513597157789483451433284889523910851921570533287481871470539549841018284238557887 7202
    apm: [0.006099072513597157789483451433284889523910851921570533287481871470539549841018284238557887 7202 +/- 7.27e-92]
 math53:  0.00609907251359716
 sflint:  0.006099073
 dflint:  0.00609907251359716
 eflint:  0.0060990725135971577901
 qflint:  0.006099072513597157789483451433284 89
 oflint:  0.006099072513597157789483451433284889523910851921570533287481871470539549 9
 mflint:  0.006099072513597157789483451433284889523910851921570533287481871470539549841018284238557887 61
 aflint: [0.006099072513597157789483451433284889523910851921570533287481871470539549841018284238557888 +/- 6.25e-91]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> s = 3; z = -5.1+2j;  gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.bose_einstein(s, z)))
    fpm:  (-0.00253865761980183, 0.00554199702575756)
    mpm:  (-0.00253865761980182609387866436699003711597578076917638206676388764543641399960446539535433417, 0.
↪0055419970257575581780296280208652254346013213180112)
cmath53:  (-0.00253865761980192, 0.00554199702575756)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> s = 3; z = -5.1+2j;  gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.bose_einstein(s, z))))
    fpm:  -0.00253865761980183
    mpm:  -0.00253865761980182609387866436699003711597578076917638206676388764543641399960446539535433417
    dpm:  -0.00253865761980182609387866436699003711597578076917638206676388764543641399960446539535433417
    gpm:  -0.00253865761980182609387866436699003711597578076917638206676388764543641399960446539535433417 01
    apm: [-0.00253865761980182609387866436699003711597578076917638206676388764543641399960446539535433417 +/- 5.38e-92]
cmath53:  -0.00253865761980192
sflintc:  -0.002538658
dflintc:  -0.00253865761980183
eflintc:  -0.0025386576198018260 94
qflintc:  -0.00253865761980182609387866436699004
oflintc:  -0.00253865761980182609387866436699003711597578076917638206676388764543641 4
mflintc:  -0.00253865761980182609387866436699003711597578076917638206676388764543641399960446539535433414
aflintc: [-0.00253865761980182609387866436699003711597578076917638206676388764543641399960446539535433414 +/- 2.02e-91]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> s = 3; z = -5.1+2j;  gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.bose_einstein(s, z))))
    fpm:  0.00554199702575756
    mpm:  0.005541997025757558178029628020865225434601321318011216263353117981424219852601258249322583 59
    dpm:  0.005541997025757558178029628020865225434601321318011216263353117981424219852601258249322583 59
    gpm:  0.005541997025757558178029628020865225434601321318011216263353117981424219852601258249322583 5897
    apm: [0.005541997025757558178029628020865225434601321318011216263353117981424219852601258249322583 6 +/- 5.60e-92]
cmath53:  0.00554199702575756
sflintc:  0.005541997
dflintc:  0.00554199702575756
eflintc:  0.0055419970257575581785
qflintc:  0.005541997025757558178029628020865 23
oflintc:  0.005541997025757558178029628020865225434601321318011216263353117981424219 9
mflintc:  0.005541997025757558178029628020865225434601321318011216263353117981424219852601258249322583 54
aflintc: [0.005541997025757558178029628020865225434601321318011216263353117981424219852601258249322584 +/- 5.87e-91]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

9.3.8 Fermi-Dirac integrals, $F_s(x)$

`ctx.fermi_dirac(s, x)`

where `ctx` is `math53` or `ctxflint`.

Returns the Fermi-Dirac integral of order s, $F_s(x) = \dfrac{1}{\Gamma(s+1)} \displaystyle\int_0^\infty \frac{t^s}{e^{t-x}+1} = -\mathrm{Li}_{s+1}(-e^x)$.

See also: Wikipedia [1313], MathWorld [952], Ehrhardt [295] (3.6.8.1).

An example with real input:

```
>>> from xlcalcnet import *
>>> s = 3; z = -5.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.fermi_dirac(s, z)))
    fpm:  0.00609442621296756
    mpm:  0.006094426212967558080013003565989516698761646802312602090012215426126552571847785087510745 92
    dpm:  0.006094426212967558080013003565989516698761646802312602090012215426126552571847785087510745 92
    gpm:  0.006094426212967558080013003565989516698761646802312602090012215426126552571847785087510745 9203
    apm: [0.006094426212967558080013003565989516698761646802312602090012215426126552571847785087510745 9 +/- 4.24e-92]
 math53:  0.00609442621296756
 sflint:  0.006094427
 dflint:  0.00609442621296756
 eflint:  0.006094426212967558080 7
 qflint:  0.006094426212967558080013003565989 52
 oflint:  0.006094426212967558080013003565989516698761646802312602090012215426126552 7
 mflint:  0.006094426212967558080013003565989516698761646802312602090012215426126552571847785087510745 85
 aflint: [0.006094426212967558080013003565989516698761646802312602090012215426126552571847785087510746 +/- 2.73e-91]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> s = 3; z = -5.1+2j;  gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.fermi_dirac(s, z)))
    fpm:  (-0.0025356206005197, 0.00554551333881991)
    mpm:  (-0.0025356206005196965656116181617252947 0866277372124995450490576800801721604159102097039479 8, 0.
↪00554551333881990547017629118016503827313000460981 1)
cmath53:  (-0.00253562060051969, 0.00554551333881991)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> s = 3; z = -5.1+2j;  gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.fermi_dirac(s, z))))
    fpm:  -0.0025356206005197
    mpm:  -0.0025356206005196965656116181617252947108662773721249954504905768008017216041591020970394795 7
    dpm:  -0.0025356206005196965656116181617252947108662773721249954504905768008017216041591020970394795 7
    gpm:  -0.0025356206005196965656116181617252947108662773721249954504905768008017216041591020970394795698
    apm: [-0.0025356206005196965656116181617252947108662773721249954504905768008017216041591020970394796 +/- 7.42e-92]
cmath53:  -0.00253562060051969
sflintc:  -0.002535621
dflintc:  -0.0025356206005197
eflintc:  -0.0025356206005196965658
qflintc:  -0.00253562060051969656561161816172 53
oflintc:  -0.0025356206005196965656116181617252947108662773721249954504905768008017216
mflintc:  -0.0025356206005196965656116181617252947108662773721249954504905768008017216041591020970394795 1
aflintc: [-0.0025356206005196965656116181617252947108662773721249954504905768008017216041591020970394 80 +/- 5.92e-91]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> s = 3; z = -5.1+2j;  gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.fermi_dirac(s, z))))
```

(continues on next page)

(continued from previous page)

```
    fpm:  0.00554551333881991
    mpm:  0.005545513338819905470176291180165038273130004609814092785641155538795812506541802910619897778
    dpm:  0.005545513338819905470176291180165038273130004609814092785641155538795812506541802910619897778
    gpm:  0.0055455133388199054701762911801650382731300046098140927856411555387958125065418029106198977802
    apm: [0.005545513338819905470176291180165038273130004609814092785641155538795812506541802910619898 +/- 3.03e-91]
cmath53:  0.00554551333881991
sflintc:  0.005545514
dflintc:  0.00554551333881991
eflintc:  0.005545513338819905470 7
qflintc:  0.005545513338819905470176291180165 4
oflintc:  0.005545513338819905470176291180165038273130004609814092785641155538795812 6
mflintc:  0.005545513338819905470176291180165038273130004609814092785641155538795812506541802910619897 6
aflintc: [0.005545513338819905470176291180165038273130004609814092785641155538795812506541802910619898 +/- 5.62e-91]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

9.3.9 Legendre's Chi function, $\chi_s(x)$

`ctx.legendre_chi`(s, x)

Returns Legendre's Chi function, defined as $\chi_s(x) = \sum_{n=0}^{\infty} \frac{x^{2n+1}}{(2n+1)^s} = \frac{1}{2}\left(\mathrm{Li}_s(x) - \mathrm{Li}_s(-x)\right)$, for $s \geq 0, |x| \leq 1$.

See also: Wikipedia [1322], MathWorld [962], Ehrhardt [295] (3.6.9).

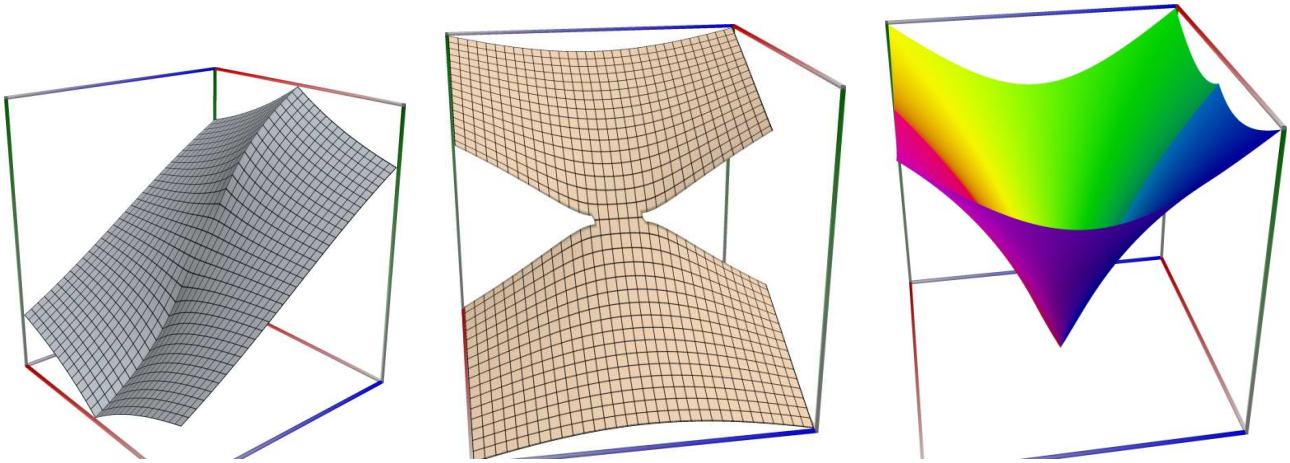

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \leq x \leq 6$ (blue axis), $-6 \leq y \leq 6$ (red axis), $-10 \leq z \leq 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> s = 3; z = -5.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.legendre_chi(s, z)))
    fpm:  -4.21634989008759
    mpm:  -4.216349890087587034514042426252188488480108908450724122137242819528036805013403071318598 95
    dpm:  -4.216349890087587034514042426252188488480108908450724122137242819528036805013403071318598 95
    gpm:  -4.216349890087587034514042426252188488480108908450724122137242819528036805013403071318598 9498
    apm: [-4.216349890087587034514042426252188488480108908450724122137242819528036805013403071319 +/- 5.29e-85]
 math53:  -4.21634989008759
 sflint:  -4.21635
 dflint:  -4.21634989008759
 eflint:  -4.2163498900875870344
 qflint:  -4.216349890087587034514042426252 19
 oflint:  -4.216349890087587034514042426252188488480108908450724122137242819528036805013403071318598 52
 mflint:  -4.216349890087587034514042426252188488480108908450724122137242819528036805013403071318598 52
 aflint: [-4.216349890087587034514042426252188488480108908450724122137242819528036805013403071319 +/- 8.69e-85]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> s = 3; z = -5.1+2j;  gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.legendre_chi(s, z)))
    fpm:  (-3.36807891622459, 3.01743198627304)
    mpm:  (-3.3680789162245861913742738728347912282005225744247, 3.017431986273044677205068452766686851584753722740 1)
cmath53:  (-3.36807891622459, 3.01743198627304)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> s = 3; z = -5.1+2j;  gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
```

(continues on next page)

(continued from previous page)

```
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.legendre_chi(s, z))))
    fpm:  -3.36807891622459
    mpm:  -3.36807891622458619137427387283479122820052257442474596913809790951376695752702150347290 97
    dpm:  -3.36807891622458619137427387283479122820052257442474596913809790951376695752702150347290 97
    gpm:  -3.36807891622458619137427387283479122820052257442474596913809790951376695752702150347290 96998
    apm: [-3.36807891622458619137427387283479122820052257442474596913809790951376695752702150347 3473 +/- 4.38e-85]
cmath53:  -3.36807891622459
sflintc:  -3.368079
dflintc:  -3.36807891622459
eflintc:  -3.3680789162245861914
qflintc:  -3.368078916224586191374273872834791228200522574424745969138097909513766
oflintc:  -3.3680789162245861913742738728347912282005225744247459691380979095137669575270215034729 0952
mflintc:  -3.3680789162245861913742738728347912282005225744247459691380979095137669575270215034729 0952
aflintc: [-3.3680789162245861913742738728347912282005225744247459691380979095137669575270215034 7 +/- 4.02e-84]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> s = 3; z = -5.1+2j;  gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.legendre_chi(s, z))))
    fpm:  3.01743198627304
    mpm:  3.01743198627304467720506845276668685158475372274010683327212795524197193109435376369115498
    dpm:  3.01743198627304467720506845276668685158475372274010683327212795524197193109435376369115498
    gpm:  3.01743198627304467720506845276668685158475372274010683327212795524197193109435376369115499
    apm: [3.01743198627304467720506845276668685158475372274010683327212795524197193109435376369 1 +/- 4.64e-85]
cmath53:  3.01743198627304
sflintc:  3.017432
dflintc:  3.01743198627304
eflintc:  3.0174319862730446772
qflintc:  3.01743198627304467720506845276669
oflintc:  3.017431986273044677205068452766686851584753722740106833272127955241971931
mflintc:  3.017431986273044677205068452766686851584753722740106833272127955241971931094353763691155 02
aflintc: [3.01743198627304467720506845276668685158475372274010683327212795524197193109435376369 +/- 2.20e-84]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

9.3.10 Generalized inverse tangent integral

`ctx.inverse_tan_integral`(s, z)

Returns the generalized inverse tangent integral $Ti_s(z)$, which can be expressed in terms of polylogarithms:

$$\mathrm{Ti}_s(z) = \frac{1}{2i}\left[\mathrm{Li}_s(iz) - \mathrm{Li}_s(-iz)\right].$$

The relation in particular implies:

$$\mathrm{Ti}_0(z) = \frac{z}{1+z^2}, \quad \mathrm{Ti}_1(z) = \arctan z, \quad \mathrm{Ti}_2(z) = \int_0^z \frac{\arctan t}{t}\mathrm{d}t, \quad \ldots \quad \mathrm{Ti}_{n+1}(z) = \int_0^z \frac{\mathrm{Ti}_n(t)}{t}\mathrm{d}t,$$

which explains the function name.

See also: Wikipedia [1327], MathWorld [958], Ehrhardt [295] (3.6.17).

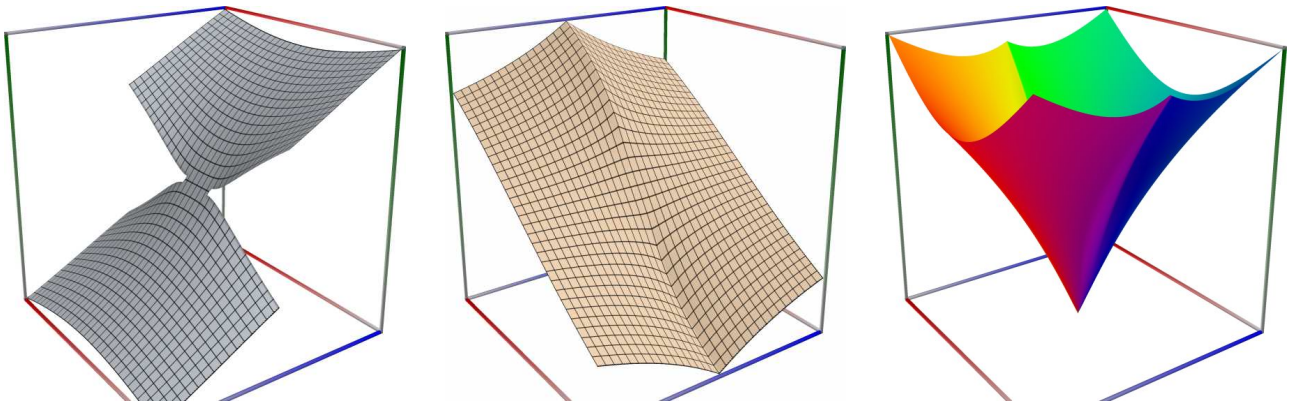

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> s = 3; z = -5.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.inverse_tan_integral(s, z)))
    fpm:  -3.82687109377201
    mpm:  -3.826871093772009594567672355285506302736831544712064952520036049975263496313658279512540 78
    dpm:  -3.826871093772009594567672355285506302736831544712064952520036049975263496313658279512540 78
    gpm:  -3.826871093772009594567672355285506302736831544712064952520036049975263496313658279512540 78
    apm: [-3.826871093772009594567672355285506302736831544712064952520036049975263496313658279513 +/- 7.14e-85]
 math53:  -3.82687109377201
 sflint:  -3.826871
 dflint:  -3.82687109377201
 eflint:  -3.8268710937720095944
 qflint:  -3.826871093772009594567672355285 51
 oflint:  -3.826871093772009594567672355285506302736831544712064952520036049975263 5
 mflint:  -3.826871093772009594567672355285506302736831544712064952520036049975263496313658279512540 69
 aflint: [-3.826871093772009594567672355285506302736831544712064952520036049975263496313658279 51 +/- 3.41e-84]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> s = 3; z = -5.1+2j;  gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.inverse_tan_integral(s, z)))
    fpm:  (-3.93019424226452, 1.0648751979531)
    mpm:  (-3.9301942422645179790729604006463680121426642176632, 1.0648751979531028577248417201938102837739584605486)
cmath53:  (-3.93019424226452, 1.0648751979531)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> s = 3; z = -5.1+2j;  gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.inverse_tan_integral(s, z))))
    fpm:  -3.93019424226452
    mpm:  -3.9301942422645179790729604006463680121426642176631923401383833025305873692888129527788785
    dpm:  -3.9301942422645179790729604006463680121426642176631923401383833025305873692888129527788785
    gpm:  -3.9301942422645179790729604006463680121426642176631923401383833025305873692888129527788785
    apm: [-3.9301942422645179790729604006463680121426642176631923401383833025305873692888129527779 +/- 4.44e-85]
cmath53:  -3.93019424226452
sflintc:  -3.930194
dflintc:  -3.93019424226452
eflintc:  -3.9301942422645179790729604006463637
qflintc:  -3.930194242264517979072960400646368012142664217663192340138383302530587369288812952778785
oflintc:  -3.9301942422645179790729604006463680121426642176631923401383833025305874
mflintc:  -3.930194242264517979072960400646368012142664217663192340138383302530587369288812952778878 45
aflintc: [-3.9301942422645179790729604006463680121426642176631923401383833025305873692888129527778 +/- 2.22e-84]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> s = 3; z = -5.1+2j;  gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.inverse_tan_integral(s, z))))
    fpm:  1.0648751979531
    mpm:  1.0648751979531028577248417201938102837739584605486478384489188489188059657341783213584231 4
    dpm:  1.0648751979531028577248417201938102837739584605486478384489188489188059657341783213584231 4
    gpm:  1.0648751979531028577248417201938102837739584605486478384489188489188059657341783213584231 4
    apm: [1.0648751979531028577248417201938102837739584605486478384489188489188059657341783213 58 +/- 8.19e-85]
cmath53:  1.0648751979531
sflintc:  1.064875
dflintc:  1.0648751979531
eflintc:  1.064875197953102857 7
qflintc:  1.0648751979531028577248417201938 1
oflintc:  1.0648751979531028577248417201938102837739584605486478384489188489188059657341783213584226 6
mflintc:  1.0648751979531028577248417201938102837739584605486478384489188489188059657341783213584226 6
aflintc: [1.0648751979531028577248417201938102837739584605486478384489188489188059657341783213 6 +/- 2.88e-84]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

9.4 Hurwitz zeta and related functions

9.4.1 Hurwitz zeta function, $\zeta(s, a)$

`ctx.hurwitz_zeta(`s, a`)`

where `ctx` is `math53`, `ctxflint`.

Returns the Hurwitz zeta function, defined as $\zeta(s,a) = \sum_{k=0}^{\infty} \frac{1}{(a+k)^s}$, $s > 1, a \neq 0, -1, -2, \ldots$, and by analytic continuation for $s \neq 0$. The amath implementation requires $a > 0$. If $a = 1$ then $\zeta(s)$ is returned, and if $s = 0$ the result is $\frac{1}{2} - a$.

See also Wikipedia [1319], MathWorld [954], NIST [17], Ehrhardt [295] (3.6.6), Flint [757].

$$\zeta(-n, a) = -\frac{B_{n+1}(a)}{n+1}.$$

$$\zeta(s, 1) = \zeta(s).$$

$$\zeta\left(s, \tfrac{1}{2}\right) = (2^s - 1)\zeta(s).$$

$$\zeta'(0, a) = \log\Gamma(a) - \tfrac{1}{2}\log(2\pi).$$

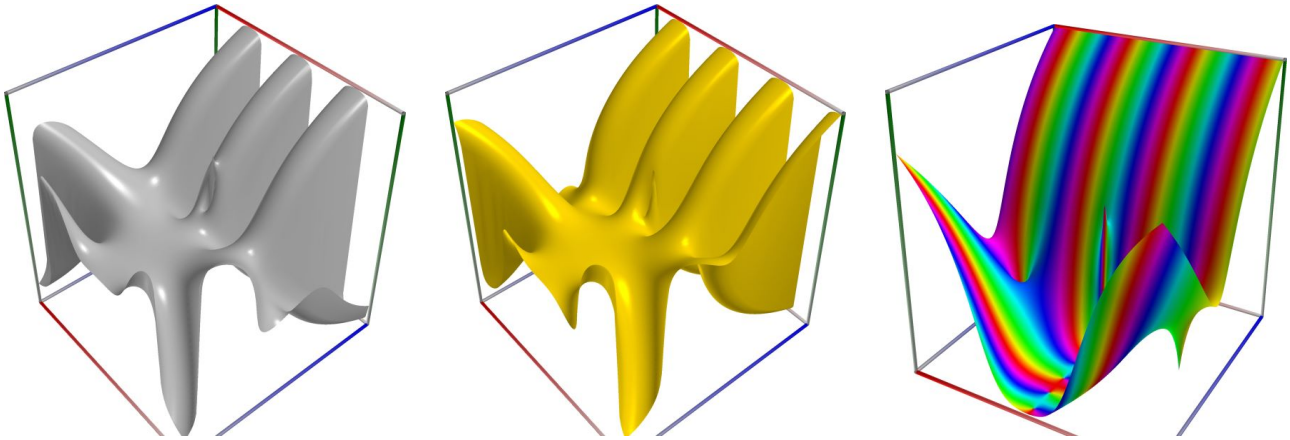

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \leq x \leq 6$ (blue axis), $-6 \leq y \leq 6$ (red axis), $-10 \leq z \leq 10$ (green axis). Function values are *loglog-transformed*.

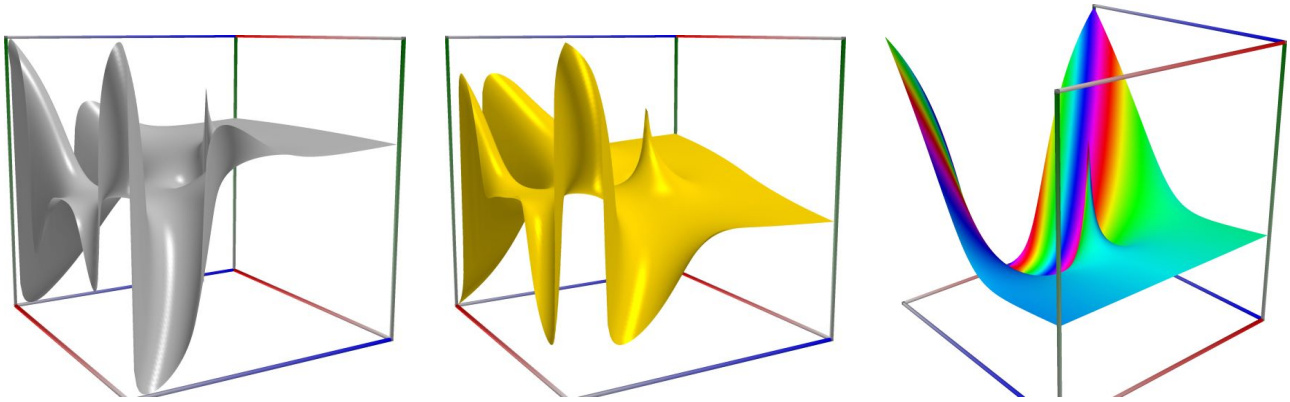

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \leq x \leq 6$ (blue axis), $-6 \leq y \leq 6$ (red axis), $-10 \leq z \leq 10$ (green axis). Function values are *loglog-transformed*.

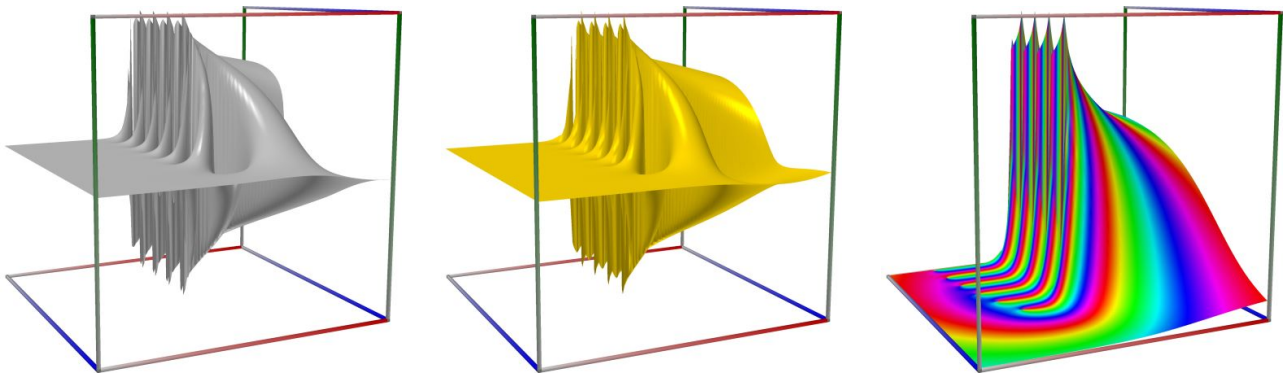

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \leq x \leq 6$ (blue axis), $-6 \leq y \leq 6$ (red axis), $-10 \leq z \leq 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> s = 3; a = 0.3; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.hurwitz_zeta(s, a)))
    fpm:  37.636268294363
    mpm:  37.6362682943630153333846652574957033323512012672705829910377515404933650440486247990956452
    dpm:  37.6362682943630153333846652574957033323512012672705829910377515404933650440486247990956452
    gpm:  37.6362682943630153333846652574957033323512012672705829910377515404933650440486247990956452 01
    apm: ([37.6362682943630153333846652574957033323512012672705829910377515404933650440486247990956452 +/- 6.65e-89],␣
↪0)
 math53:  37.636268294363
 sflint:  37.63626
 dflint:  37.636268294363
 eflint:  37.636268294363015328
 qflint:  37.6362682943630153333846652574957
 oflint:  37.63626829436301533338466525749570333235120126727058299103775154049336504404862479909565
 mflint:  37.6362682943630153333846652574957033323512012672705829910377515404933650440486247990956451
 aflint: [37.6362682943630153333846652574957033323512012672705829910377515404933650440486247990956451 +/- 5.61e-89]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> s = 3; z = -5.1+2j;  gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.hurwitz_zeta(s, z)))
    fpm:  (0.0111748869624824, 0.00921098444064709)
    mpm:  (0.011174886962482443982994786732550832143817085284742, 0.
↪009210984440647089315603072959499385602716929368166 1)
cmath53:  (0.0111748869624825, 0.00921098444064707)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> s = 3; z = -5.1+2j;  gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.hurwitz_zeta(s, z))))
    fpm:  0.0111748869624824
    mpm:  0.011174886962482443982994786732550832143817085284742167735570990873329231842915936633584479
    dpm:  0.011174886962482443982994786732550832143817085284742167735570990873329231842915936633584479
    gpm:  0.011174886962482443982994786732550832143817085284742167735570990873329231842915936633584479
    apm: [0.011174886962482443982994786732550832143817085284742167735570990873329231842915936633584480 +/- 7.94e-91]
cmath53:  0.0111748869624825
sflintc:  0.01117489
dflintc:  0.0111748869624824
eflintc:  0.011174886962482443983
qflintc:  0.011174886962482443982994786732550 8
```

(continues on next page)

(continued from previous page)

```
oflintc:  0.011174886962482443982994786732550832143817085284742167735570990873329232
mflintc:  0.011174886962482443982994786732550832143817085284742167735570990873329231842915936633584480
aflintc: [0.011174886962482443982994786732550832143817085284742167735570990873329231842915936633584480 +/- 6.56e-91]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> s = 3; z = -5.1+2j;  gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.hurwitz_zeta(s, z))))
    fpm:  0.00921098444064709
    mpm:  0.009210984440647089315603072959499385602716929368166030159328732746233250669148984889792362 19
    dpm:  0.009210984440647089315603072959499385602716929368166030159328732746233250669148984889792362 19
    gpm:  0.009210984440647089315603072959499385602716929368166030159328732746233250669148984889792362 1897
    apm: [0.009210984440647089315603072959499385602716929368166030159328732746233250669148984889792362 +/- 6.87e-91]
cmath53:  0.00921098444064707
sflintc:  0.009210985
dflintc:  0.00921098444064709
eflintc:  0.009210984440647089315 8
qflintc:  0.009210984440647089315603072959499 9
oflintc:  0.009210984440647089315603072959499385602716929368166030159328732746233250 7
mflintc:  0.009210984440647089315603072959499385602716929368166030159328732746233250669148984889792362 2
aflintc: [0.009210984440647089315603072959499385602716929368166030159328732746233250669148984889792362 +/- 5.89e-91]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

9.4.2 Generalized harmonic number function, $H_x^{(r)}$

`ctx.harmonic2`(x, s)

Returns the generalized harmonic function $H_x^{(r)} = \zeta(r) - \zeta(r, x+1)$ for $r \neq 1$ and $H_x^{(r)} = H_x$ for $r = 1$.

See also: Wikipedia [1279], MathWorld [918], Ehrhardt [295] (3.6.21).

An example with real input:

```
>>> from xlcalcnet import *
>>> z = 3; r = 4.3; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.harmonic2(z, r)))
    fpm:  1.05964507222072
    mpm:  1.059645072220719835799135432785513840743069401629741783133456890980042760497121083043301 78
    dpm:  1.059645072220719835799135432785513840743069401629741783133456890980042760497121083043301 78
    gpm:  1.059645072220719835799135432785513840743069401629741783133456890980042760497121083043301 7801
    apm: ([1.059645072220719835799135432785513840743069401629741783133456890980042760497121083043301 78 +/- 3.57e-90],␣
↪0)
 math53:  1.05964507222072
 sflint:  1.059645
 dflint:  1.05964507222072
 eflint:  1.0596450722207198358
 qflint:  1.059645072220719835799135432785 51
 oflint:  1.059645072220719835799135432785513840743069401629741783133456890980042 8
 mflint:  1.059645072220719835799135432785513840743069401629741783133456890980042760497121083043301 78
 aflint: [1.059645072220719835799135432785513840743069401629741783133456890980042760497121083043301 78 +/- 3.85e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> s = 3; z = -5.1+2j;  gui.setdps(50)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.harmonic2(s, z)))
    fpm:  (-151.710872341689, -253.435525342544)
    mpm:  (-151.71087234168942522141876651458106063722242527 52, -253.435525342543813714741903725723606946040587590 49)
cmath53:  (-151.710872341671, -253.435525342526)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> s = 3; z = -5.1+2j;  gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.harmonic2(s, z))))
    fpm:  -151.710872341689
    mpm:  -151.710872341689425221418766514581060637222425275200569604163721964559323390870191608327818
    dpm:  -151.710872341689425221418766514581060637222425275200569604163721964559323390870191608327818
    gpm:  -151.710872341689425221418766514581060637222425275200569604163721964559323390870191608327818 01
    apm: [-151.710872341689425221418766514581060637222425275200569604163721964559323390870191608327818 01 +/- 1.96e-80]
cmath53:  -151.710872341671
sflintc:  -151.7109
dflintc:  -151.710872341689
eflintc:  -151.7108723416894252
qflintc:  -151.710872341689425221418766514581
oflintc:  -151.710872341689425221418766514581060637222425275200569604163721964559323390870191608327705
mflintc:  -151.710872341689425221418766514581060637222425275200569604163721964559323390870191608327705
aflintc: [-151.710872341689425221418766514581060637222425275200569604163721964559323390870191608327818 01 +/- 1.74e-80]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> s = 3; z = -5.1+2j;  gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.harmonic2(s, z))))
    fpm:  -253.435525342544
    mpm:  -253.435525342543813714741903725723606946040587590490596981419066634364019427577397349486819
```

(continues on next page)

(continued from previous page)

```
    dpm:  -253.435525342543813714741903725723606946040587590490596981419066634364019427577397349486819
    gpm:  -253.435525342543813714741903725723606946040587590490596981419066634364019427577397349486819
    apm: [-253.435525342543813714741903725723606946040587590490596981419066634364019427577397349486819
cmath53:  -253.435525342526
sflintc:  -253.4355
dflintc:  -253.435525342544
eflintc:  -253.4355253425438137
qflintc:  -253.435525342543813714741903725724
oflintc:  -253.4355253425438137147419037257236069460405875904905969814190666343640194275773973494868192
mflintc:  -253.435525342543813714741903725723606946040587590490596981419066634364019427577397349485136
aflintc: [-253.435525342543813714741903725723606946040587590490596981419066634364019427577397349486819
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

9.4.3 Bernoulli numbers, B_n

`ctx.bernoulli(n)`

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Note ctxboost.BernoulliB2n(n)

Returns the Bernoulli numbers B_n, which are defined by their generating function $\frac{1}{e^t - 1} \sum_{n=0}^{\infty} B_n \frac{t^n}{n!}$, $|t < 2\pi|$. If $n < 0$ or if $n > 2$ is odd, the result is 0, and $B_1 = -1/2$.

See also Wikipedia [1243], MathWorld [872], NIST [242], BoostMath [93], Ehrhardt [295] (3.10.2), Mpmath [579].

An example with real input:

```
>>> from xlcalcnet import *
>>> n = 16; gui.setdps(90)
>>> for ctx in gui.ctxlist_noipm_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.bernoulli(n)))
    fpm:  -7.0921568627451
    mpm:  -7.092156862745098039215686274509803921568627450980392156862745098039215686274509803921568627450980392156863
    dpm:  -7.092156862745098039215686274509803921568627450980392156862745098039215686274509803921568627450980392156863
    gpm:  -7.092156862745098039215686274509803921568627450980392156862745098039215686274509803921568627450980392156863
    apm: [-7.092156862745098039215686274509803921568627450980392156862745098039215686274509803921568627450980392156863 +/- 4.26e-90]
 math53:  -7.0921568627451
  sreal:  -7.092157
  dreal:  -7.0921568627451
  ereal:  -7.0921568627450980392
  qreal:  -7.092156862745098039215686274509
  oreal:  -7.092156862745098039215686274509803921568627450980392156862745098039215686274509803921568627450980392157
  mreal:  -7.092156862745098039215686274509803921568627450980392156862745098039215686274509803921568627450980392156863
 sflint:  -7.092157
 dflint:  -7.0921568627451
 eflint:  -7.0921568627450980392
 qflint:  -7.092156862745098039215686274509
 oflint:  -7.092156862745098039215686274509803921568627450980392156862745098039215686274509803921568627450980392157
 mflint:  -7.092156862745098039215686274509803921568627450980392156862745098039215686274509803921568627450980392156863
 aflint: [-7.092156862745098039215686274509803921568627450980392156862745098039215686274509803921568627450980392156863 +/- 7.21e-90]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), and C# (real or complex input).

9.4.4 Bernoulli polynomials, $B_n(x)$

`ctx.bernpoly(n, x)`

Returns $B_n(x) = \sum_{n=0}^{\infty} \binom{n}{k} B_k x^{n-k}$, the Bernoulli polynomial of degree $n \geq 0$.

See also Wikipedia [1244], MathWorld [873], NIST [242], Ehrhardt [295] (3.10.3), Flint [722], Mpmath [580].

See the Amath documentation (p. 146) for connection formula to Hurwitz Zeta.

An example with real input:

```
>>> from xlcalcnet import *
>>> n = 12; z = 4.3; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.bernpoly(n, z)))
    fpm:  6179605.09011217
    mpm:  6179605.0901121697674468864468864468864
```

(continued from previous page)

```
    fpm:  179.66
    mpm:  179.66
    dpm:  179.66
    gpm:  179.65999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999
    apm: [179.66000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000 +/- 1.90e-88]
cmath53:  179.66
sflintc:  179.66
dflintc:  179.66
eflintc:  179.65999999999999999
qflintc:  179.66
oflintc:  179.66
mflintc:  179.66
aflintc: [179.66000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000 +/- 3.89e-88]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

9.4.5 Euler numbers

`ctx.eulernum(`n`)`

where `ctx` is `math53`, `ctxflint`.

Returns the Euler numbers E_n. See also Wikipedia [1272], MathWorld [915], Flint [756], Ehrhardt [295] (3.10.8), Mpmath [606].

The Euler numbers E_n can be defined as

$$E_n = \frac{4^n \beta(n+1)}{\zeta(n)} \frac{2B_n}{\pi}$$

An example with real input:

```
>>> from xlcalcnet import *
>>> n = 16; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.eulernum(n)))
    fpm:  19391512145
    mpm:  19391512145.0
    dpm:  19391512145.0
    gpm:  19391512145.0
    apm: [19391512145.000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000 +/- 3.01e-80]
 math53:  19391512145
 sflint:  1.939151E+10
 dflint:  19391512145
 eflint:  19391512145
 qflint:  19391512145
 oflint:  19391512145
 mflint:  19391512145
 aflint:  19391512145.000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), and C# (real or complex input).

9.4.6 Euler polynomials, $E_n(x)$

`ctx.eulerpoly(n, x)`

Returns $E_n(x) = \dfrac{2}{n+1}\left(B_{n+1}(x) - 2^{n+1}B_{n+1}\left(\dfrac{x}{2}\right)\right)$, the Euler polynomial of degree $n \geq 0$. Special values include the Euler numbers $E_n = 2^n E_n(1/2)$.

See also Wikipedia [1273], MathWorld [916], NIST [242], Ehrhardt [295] (3.10.9), Mpmath [607].

$$E_{n-1}(x) = \frac{2}{n}\left(B_n(x) - 2^n B_n\left(\tfrac{1}{2}x\right)\right),$$

$$E_{n-1}(x) = \frac{2^n}{n}\left(B_n\left(\tfrac{1}{2}x + \tfrac{1}{2}\right) - B_n\left(\tfrac{1}{2}x\right)\right).$$

An example with real input:

```
>>> from xlcalcnet import *
>>> n = 12; z = 4.3; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.eulerpoly(n, z)))
    fpm:  6179605.09011217
    mpm:  6179605.0901121697674468864468864468864
```

```
>>> from xlcalcnet import *
>>> n = 3; z = -5.1+2j;  gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.eulerpoly(n, z))))
    fpm:  178.66
    mpm:  178.66
    dpm:  178.66
    gpm:  178.659999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999999
    apm: [178.660000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000 +/- 1.26e-87]
cmath53:  178.66
sflintc:  178.66
dflintc:  178.66
eflintc:  178.65999999999999999
qflintc:  178.66
oflintc:  178.66
mflintc:  178.66
aflintc: [178.660000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000000 +/- 2.76e-87]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

9.4.7 Barnes G-function

`ctx.barnes_g(z)`

Returns the Barnes G-function of z. See also Wikipedia [1291], MathWorld [910], NIST [20], Whittaker and Watson [1074], Mpmath [622].

Evaluates the Barnes G-function, which generalizes the superfactorial (*superfac()*) and by extension also the hyperfactorial (*hyperfac()*) to the complex numbers in an analogous way to how the gamma function generalizes the ordinary factorial.

The Barnes G-function may be defined in terms of a Weierstrass product:

$$G(z+1) = (2\pi)^{z/2} e^{-[z(z+1)+\gamma z^2]/2} \prod_{n=1}^{\infty} \left[\left(1+\frac{z}{n}\right)^n e^{-z+z^2/(2n)} \right]$$

For positive integers n, we have have relation to superfactorials $G(n) = \mathrm{sf}(n-2) = 0! \cdot 1! \cdots (n-2)!$.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.barnes_g(x)))
    fpm:  15.4289500100001
    mpm:  15.428950010000129744275832115301007064126396421046992492396931906609413810688609370881672l
    dpm:  15.428950010000129744275832115301007064126396421046992492396931906609413810688609370881672l
    gpm:  15.428950010000129744275832115301007064126396421046992492396931906609413810688609370881672l
    apm: [15.428950010000129744275832115301007064126396421046992492396931906609413810688609370881672l +/- 3.60e-86]
 math53:  15.4289500100001
 sflint:  15.42895
 dflint:  15.4289500100001
 eflint:  15.42895001000012974
 qflint:  15.428950010000129744275832115301
 oflint:  15.428950010000129744275832115301007064126396421046992492396931906609413
 mflint:  15.428950010000129744275832115301007064126396421046992492396931906609413810688609370881672
 aflint: [15.428950010000129744275832115301007064126396421046992492396931906609413810688609370881672 +/- 8.69e-87]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.barnes_g(x)))
    fpm:  (955251104405502, 136041869824361)
    mpm:  (955251104405501.51861286680456826683757610281610739, 136041869824361.010295518227085122968571187291899902)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.barnes_g(x))))
    fpm:  955251104405502
    mpm:  955251104405501.518612866804568266837576102816107417803111259338942662927206555907929044994
    dpm:  955251104405501.518612866804568266837576102816107417803111259338942662927206555907929044994
    gpm:  955251104405501.518612866804568266837576102816107417803111259338942662927206555907929044994
    apm: [955251104405501.518612866804568266837576102816107417803111259338942662927206555907929045 +/- 6.84e-73]
cmath53:  NaN
sflintc:  9.552504E+14
dflintc:  955251104405499
eflintc:  955251104405501.51794
qflintc:  955251104405501.518612866804568265
oflintc:  955251104405501.518612866804568266837576102816107417803111259338942662927206555907929044994
mflintc:  955251104405501.518612866804568266837576102816107417803111259338942662927206555907929044878
aflintc: [955251104405501.518612866804568266837576102816107417803111259338942662927206555907929045 +/- 9.22e-73]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.barnes_g(x))))
    fpm:  136041869824361
    mpm:  136041869824361.010295518227085122968571187291899088504392529320098187794252984214379774482
    dpm:  136041869824361.010295518227085122968571187291899088504392529320098187794252984214379774482
    gpm:  136041869824361.010295518227085122968571187291899088504392529320098187794252984214379774448199
    apm: [136041869824361.010295518227085122968571187291899088504392529320098187794252984214379774 +/- 7.68e-73]
cmath53:  NaN
sflintc:  1.360403E+14
dflintc:  136041869824355
eflintc:  136041869824361.0089
qflintc:  136041869824361.010295518227085118
oflintc:  136041869824361.010295518227085122968571187291899088504392529320098187757
mflintc:  136041869824361.010295518227085122968571187291899088504392529320098187794252984214379774331
aflintc: [136041869824361.010295518227085122968571187291899088504392529320098187794252984214379774 +/- 4.97e-72]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

9.4.8 Logarithm of Barnes G function

`ctx.logbarnes_g(`x`)`

where `ctx` is `math53` or `ctxflint`.

Returns $\log G(z)$, the logarithm of Barnes G function, with log G(z) = (z-1) log Gamma(z) - zeta'(-1,z) + zeta'(-1).

See also: Wikipedia [1291], MathWorld [910], MathWorld [926], NIST [20], Ehrhardt [295] (3.5.6.9).

Computes Barnes G-function or the logarithmic Barnes G-function, respectively. The logarithmic version has branch cuts on the negative real axis and is continuous elsewhere in the complex plane, in analogy with the logarithmic gamma function. The functional equation

$$\log G(z+1) = \log \Gamma(z) + \log G(z).$$

holds for all z.

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.logbarnes_g(x)))
    fpm:  2.73624561545306
    mpm:  2.736245615453055909727656966061614467004735603468621116169494540553983024569384027748450 81
    dpm:  2.736245615453055909727656966061614467004735603468621116169494540553983024569384027748450 81
    gpm:  2.736245615453055909727656966061614467004735603468621116169494540553983024569384027748450 8102
    apm: ([2.736245615453055909727656966061614467004735603468621116169494540553983024569384027748451 +/- 7.10e-88], 0)
 math53:  2.73624561545306
 sflint:  2.736245
 dflint:  2.73624561545306
 eflint:  2.7362456154530559096
 qflint:  2.736245615453055909727656966061 61
 oflint:  2.736245615453055909727656966061614467004735603468621116169494540553983
 mflint:  2.736245615453055909727656966061614467004735603468621116169494540553983024569384027748450 8
 aflint: [2.736245615453055909727656966061614467004735603468621116169494540553983024569384027748451 +/- 6.33e-88]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.logbarnes_g(x)))
    fpm:  (34.5030348724336, 0.141463505969766)
    mpm:  (34.503034872433602194826950347768778315231717587928, 0.141463505969765638420942954737838557981311485907 05)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.logbarnes_g(x))))
    fpm:  34.5030348724336
    mpm:  34.503034872433602194826950347768778315231717587927744707193946154143867771982760040807 3197
    dpm:  34.503034872433602194826950347768778315231717587927744707193946154143867771982760040807 3197
    gpm:  34.503034872433602194826950347768778315231717587927744707193946154143867771982760040807 319697
    apm: [34.503034872433602194826950347768778315231717587927744707193946154143867771982760040807 32 +/- 9.41e-88]
cmath53:  NaN
sflintc:  34.50303
dflintc:  34.5030348724336
eflintc:  34.503034872433602193
qflintc:  34.50303487243360219482695034776 88
oflintc:  34.503034872433602194826950347768778315231717587927744707193946154143868
mflintc:  34.503034872433602194826950347768778315231717587927744707193946154143867771982760040807 3196
aflintc: [34.503034872433602194826950347768778315231717587927744707193946154143867771982760040807 32 +/- 1.16e-87]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.logbarnes_g(x))))
    fpm:  0.141463505969766
    mpm:  0.14146350596976563842094295473783855798131148590711889721107788621991221329486439663713319401
    dpm:  0.14146350596976563842094295473783855798131148590711889721107788621991221329486439663713319401
    gpm:  0.14146350596976563842094295473783855798131148590711889721107788621991221329486439663713319401
    apm: [44.123760656226870976897950320650878936741683077158600390860302178529341901301790377429621 +/- 5.37e-88]
cmath53:  NaN
sflintc:  44.12376
dflintc:  44.1237606562269
eflintc:  44.123760656226870977
qflintc:  44.123760656226870976897950320650 9
oflintc:  44.123760656226870976897950320650878936741683077158600390860302178529342
mflintc:  44.123760656226870976897950320650878936741683077158600390860302178529341901301790377429620 6
aflintc: [44.123760656226870976897950320650878936741683077158600390860302178529341901301790377429621 +/- 9.41e-88]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

9.4.9 Hyperfactorial

`ctx.hyperfactorial(z)`

Returns the hyperfactorial of z. See also Wikipedia [1280], MathWorld [921], of Integer Sequences [425], Mpmath [629].

Computes the hyperfactorial, defined for integers as the product

$$H(n) = \prod_{k=1}^{n} k^k.$$

The hyperfactorial satisfies the recurrence formula $H(z) = z^z H(z-1)$. It can be defined more generally in terms of the Barnes G-function (see *barnesg()*) and the gamma function by the formula

$$H(z) = \frac{\exp(z \log \Gamma(z+1))}{G(z+1)}, \Re(z) > 0.$$

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.hyperfactorial(x)))
    fpm:  223498269.200776
    mpm:  223498269.200775938550264073130441902651247196008262461448933367843736551163069681458306295
    dpm:  223498269.200775938550264073130441902651247196008262461448933367843736551163069681458306295
    gpm:  223498269.200775938550264073130441902651247196008262461448933367843736551163069681458306295 01
    apm: [223498269.200775938550264073130441902651247196008262461448933367843736551163069681458306 +/- 4.18e-79]
 math53:  223498269.200775
 sflint:  2.234981E+08
 dflint:  223498269.200775
 eflint:  223498269.20077593837
 qflint:  223498269.2007759385502640731304
 oflint:  223498269.200775938550264073130441902651247196008262461448933367843736551163069681458306291
 mflint:  223498269.200775938550264073130441902651247196008262461448933367843736551163069681458306291
 aflint: [223498269.200775938550264073130441902651247196008262461448933367843736551163069681458306 +/- 4.02e-79]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = 5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.hyperfactorial(x)))
    fpm:  (924326.966619702, 183519.866637836)
    mpm:  (924326.96661970239447632946735859563871720247113209, 183519.866637835498999602750087718381908644445293 18)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = 5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.hyperfactorial(x))))
    fpm:  924326.966619702
    mpm:  924326.96661970239447632946735859563871720247113212270107202770606374387024527042904429445
    dpm:  924326.96661970239447632946735859563871720247113212270107202770606374387024527042904429445
    gpm:  924326.96661970239447632946735859563871720247113212270107202770606374387024527042904429445 001
    apm: [924326.96661970239447632946735859563871720247113212270107202770606374387024527042904429 +/- 5.15e-81]
cmath53:  NaN
sflintc:  924326.3
dflintc:  924326.9666197
eflintc:  924326.96661970239381
qflintc:  924326.96661970239447632946735859 3
oflintc:  924326.96661970239447632946735859563871720247113212270107202770606374377
mflintc:  924326.96661970239447632946735859563871720247113212270107202770606374387024527042904429444
aflintc: [924326.96661970239447632946735859563871720247113212270107202770606374387024527042904429 +/- 5.12e-81]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = 5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.hyperfactorial(x))))
    fpm:  183519.866637836
    mpm:  183519.866637835498999602750087718381908644445293208832067572189791440620139647303654812 98
    dpm:  183519.866637835498999602750087718381908644445293208832067572189791440620139647303654812 98
    gpm:  183519.866637835498999602750087718381908644445293208832067572189791440620139647303654812 97999
    apm: [183519.866637835498999602750087718381908644445293208832067572189791440620139647303654813 +/- 5.39e-82]
cmath53:  NaN
sflintc:  183519.2
dflintc:  183519.866637833
eflintc:  183519.86663783549841
qflintc:  183519.866637835498999602750087716
oflintc:  183519.866637835498999602750087718381908644445293208832067572189791440052
mflintc:  183519.866637835498999602750087718381908644445293208832067572189791440620139647303654812 96
aflintc: [183519.866637835498999602750087718381908644445293208832067572189791440620139647303654813 +/- 5.61e-82]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

9.4.10 Superfactorial

`ctx.superfactorial(z)`

Returns the Superfactorial of z. See also Wikipedia [1287], MathWorld [931], of Integer Sequences [426], Mpmath [634].

Computes the superfactorial, defined as the product of consecutive factorials

$$\mathrm{sf}(n) = \prod_{k=1}^{n} k!$$

For general complex z, $\mathrm{sf}(z)$ is defined in terms of the Barnes G-function (see *barnesg()*).

$$\mathrm{sf}(z) = G(z+2)$$

An example with real input:

```
>>> from xlcalcnet import *
>>> x = 5.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.superfactorial(x)))
    fpm:  61390.7525055667
    mpm:  61390.752505566662103359171600910664589180459638264104232446519776549498086396028134156254 6
    dpm:  61390.752505566662103359171600910664589180459638264104232446519776549498086396028134156254 6
    gpm:  61390.752505566662103359171600910664589180459638264104232446519776549498086396028134156254 597
    apm: [61390.752505566662103359171600910664589180459638264104232446519776549498086396028134156 3 +/- 7.72e-83]
 math53:  61390.7525055665
 sflint:  61390.72
 dflint:  61390.7525055665
 eflint:  61390.752505566662073
 qflint:  61390.752505566662103359171600910 6
 oflint:  61390.752505566662103359171600910664589180459638264104232446519776549493
 mflint:  61390.752505566662103359171600910664589180459638264104232446519776549498086396028134156253 7
 aflint: [61390.752505566662103359171600910664589180459638264104232446519776549498086396028134156 3 +/- 7.41e-83]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> x = 5.1+2j; gui.setdps(50)
>>> for ctx in [fpm, mpm]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.superfactorial(x)))
    fpm:  (717.807523199199, -1445.95038920532)
    mpm:  (717.807523199199025208713587166450241514152888106600562965029242744565634006513377578654885, -1445.950389205317738455390380594951561566267227099 )
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> x = 5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.superfactorial(x))))
    fpm:  717.807523199199
    mpm:  717.807523199199025208713587166450241514152888106600562965029242744565634006513377578654885
    dpm:  717.807523199199025208713587166450241514152888106600562965029242744565634006513377578654885
    gpm:  717.807523199199025208713587166450241514152888106600562965029242744565634006513377578654885
    apm: [717.807523199199025208713587166450241514152888106600562965029242744565634006513377578655 +/- 7.04e-85]
cmath53:  NaN
sflintc:  717.8066
dflintc:  717.807523199196
eflintc:  717.80752319919902443
qflintc:  717.807523199199025208713587166447
oflintc:  717.807523199199025208713587166450241514152888106600562965029242744565
mflintc:  717.807523199199025208713587166450241514152888106600562965029242744565634006513377578654817
aflintc: [717.807523199199025208713587166450241514152888106600562965029242744565634006513377578655 +/- 7.87e-85]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> x = 5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.superfactorial(x))))
    fpm:  -1445.95038920532
    mpm:  -1445.950389205317738455390380594951561566267227099809701651123261373676330896547362392101 95
    dpm:  -1445.950389205317738455390380594951561566267227099809701651123261373676330896547362392101 95
    gpm:  -1445.950389205317738455390380594951561566267227099809701651123261373676330896547362392101 95
    apm: [-1445.950389205317738455390380594951561566267227099809701651123261373676330896547362392102 +/- 9.43e-85]
cmath53:  NaN
sflintc:  -1445.95
dflintc:  -1445.95038920532
eflintc:  -1445.950389205317738
qflintc:  -1445.950389205317738455390380594 95
oflintc:  -1445.950389205317738455390380594951561566267227099809701651123261373676 3
mflintc:  -1445.950389205317738455390380594951561566267227099809701651123261373676330896547362392101 93
aflintc: [-1445.950389205317738455390380594951561566267227099809701651123261373676330896547362392102 +/- 9.37e-85]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

9.5 Riemann zeta function, and related functions

9.5.1 Riemann zeta function, $\zeta(s)$

`ctx.zeta(`s`)`

where `ctx` is `math53`, `mathc53`, `ctxboost` `ctxflint`.

Returns the Riemann zeta function, defined as $\zeta(s) = \sum_{k=1}^{\infty} \frac{1}{k^s}$ for $s > 1$, and by analytic continuation for $s \neq 1$.

See also Wikipedia [1328], MathWorld [965], NIST [19], BoostMath [158], Ehrhardt [295] (3.6.1.1), Ehrhardt [295] (4.2.63), Flint [759], Mpmath [658].

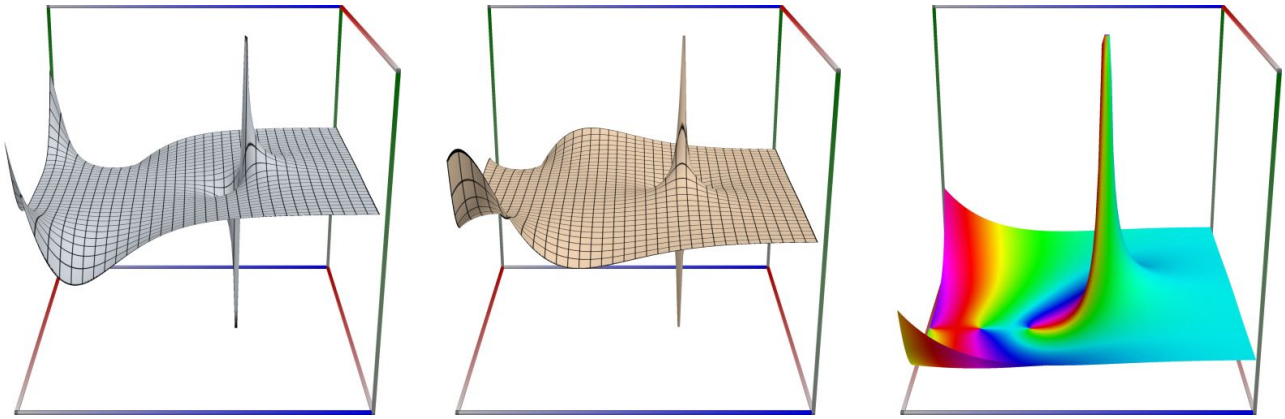

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \leq x \leq 6$ (blue axis), $-6 \leq y \leq 6$ (red axis), $-10 \leq z \leq 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> s = -5.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_noipm_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.zeta(s)))
    fpm:  -0.00386687567958226
    mpm:  -0.00386687567958226052487833515638707891669309861271450469655760220949065254885860931178398183
    dpm:  -0.00386687567958226052487833515638707891669309861271450469655760220949065254885860931178398183
    gpm:  -0.00386687567958226052487833515638707891669309861271450469655760220949065254885860931178398183
    apm: [-0.00386687567958226052487833515638707891669309861271450469655760220949065254885860931178398183 +/- 4.41e-92]
 math53:  -0.00386687567958226
  sreal:  -0.003866876
  dreal:  -0.00386687567958227
  ereal:  -0.003866875679582260521
  qreal:  -0.00386687567958226052487833515638708
  oreal:  -0.00386687567958226052487833515638707891669309861271450469655760220949065512
  mreal:  -0.00386687567958226052487833515638707891669309861271450469655760220949065254885860931178398162
 sflint:  -0.003866876
 dflint:  -0.00386687567958226
 eflint:  -0.003866875679582260521
 qflint:  -0.00386687567958226052487833515638708
 oflint:  -0.00386687567958226052487833515638707891669309861271450469655760220949065526
 mflint:  -0.00386687567958226052487833515638707891669309861271450469655760220949065254885860931178398183
 aflint: [-0.00386687567958226052487833515638707891669309861271450469655760220949065254885860931178398183 +/- 4.44e-92]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> s = -5.1+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.zeta(s)))
```

(continues on next page)

(continued from previous page)

```
    fpm:  (-0.0295478909669659, -0.0110797461302298)
    mpm:  (-0.029547890966965942130080408339261964571934735105396751785733739181946012620019366882440253399, -0.011079746130229830775084892221347099268267083615002316952298060975904464385576522474618756101)
cmath53:  (-0.0295478909669659, -0.0110797461302298)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> s = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.zeta(s))))
    fpm:  -0.0295478909669659
    mpm:  -0.029547890966965942130080408339261964571934735105396751785733739181946012620019366882440253399
    dpm:  -0.029547890966965942130080408339261964571934735105396751785733739181946012620019366882440253399
    gpm:  -0.029547890966965942130080408339261964571934735105396751785733739181946012620019366882440253399
    apm: [-0.029547890966965942130080408339261964571934735105396751785733739181946012620019366882440253 +/- 7.29e-91]
cmath53:  -0.0295478909669659
sflintc:  -0.02954789
dflintc:  -0.0295478909669659
eflintc:  -0.029547890966965942132
qflintc:  -0.02954789096696594213008040833926
oflintc:  -0.029547890966965942130080408339261964571934735105396751785733739181946013
mflintc:  -0.029547890966965942130080408339261964571934735105396751785733739181946012620019366882440253399
aflintc: [-0.029547890966965942130080408339261964571934735105396751785733739181946012620019366882440253 +/- 6.81e-91]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> s = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.zeta(s))))
    fpm:  -0.0110797461302298
    mpm:  -0.011079746130229830775084892221347099268267083615002316952298060975904464385576522474618756101
    dpm:  -0.011079746130229830775084892221347099268267083615002316952298060975904464385576522474618756101
    gpm:  -0.011079746130229830775084892221347099268267083615002316952298060975904464385576522474618756101
    apm: [-0.011079746130229830775084892221347099268267083615002316952298060975904464385576522474618756 +/- 4.61e-91]
cmath53:  -0.0110797461302298
sflintc:  -0.01107974
dflintc:  -0.0110797461302298
eflintc:  -0.01107974613022983077
qflintc:  -0.011079746130229830775084892221347
oflintc:  -0.011079746130229830775084892221347099268267083615002316952298060975904464
mflintc:  -0.011079746130229830775084892221347099268267083615002316952298060975904464385576522474618756101
aflintc: [-0.011079746130229830775084892221347099268267083615002316952298060975904464385576522474618756 +/- 4.15e-91]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

9.5.2 Riemann $\zeta(s) - 1$

`ctx.zetam1(s)`

Returns the Riemann function $\zeta(s) - 1 = \zeta(s, 2)$ for $s \neq 1$.

See also Wikipedia [1328], MathWorld [965], NIST [19], BoostMath [158], Ehrhardt [295] (3.6.1.4).

An example with real input:

```
>>> from xlcalcnet import *
>>> s = -5.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.zetam1(s)))
    fpm:  -1.00386687567958
    mpm:  -1.00386687567958226052487833515638707891669309861271450469655760220949065254885860931178398
    dpm:  -1.00386687567958226052487833515638707891669309861271450469655760220949065254885860931178398
    gpm:  -1.003866875679582260524878335156387078916693098612714504696557602209490652548858609311783980l
    apm: [-1.00386687567958226052487833515638707891669309861271450469655760220949065254885860931178398 +/- 3.85e-80]
 math53:  -1.00386687567958
 sflint:  -1.003867
 dflint:  -1.00386687567958
 eflint:  -1.0038668756795822606
 qflint:  -1.00386687567958226052487833515639
 oflint:  -1.003866875679582260524878335156387078916693098612714504696557602209491
 mflint:  -1.00386687567958226052487833515638707891669309861271450469655760220949065254885860931377103
 aflint: [-1.00386687567958226052487833515638707891669309861271450469655760220949065254885860931178398 +/- 3.27e-80]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> s = -5.1+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.zetam1(s)))
    fpm:  (-1.02954789096697, -0.0110797461302298)
    mpm:  (-1.029547890966965942130080408339261964572, -0.011079746130229830775084892221347099268267083615002316952298060975904464385576522474618756l)
cmath53:  (-1.02954789096697, -0.0110797461302298)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> s = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.zetam1(s))))
    fpm:  -1.02954789096697
    mpm:  -1.029547890966965942130080408339261964571934735105396751785733739181946012620019366882440l5
    dpm:  -1.029547890966965942130080408339261964571934735105396751785733739181946012620019366882440l5
    gpm:  -1.029547890966965942130080408339261964571934735105396751785733739181946012620019366882440l501
    apm: [-1.029547890966965942130080408339261964571934735105396751785733739181946012620019366882440l501 +/- 4.83e-80]
cmath53:  -1.02954789096697
sflintc:  -1.029548
dflintc:  -1.02954789096697
eflintc:  -1.0295478909669659422
qflintc:  -1.029547890966965942130080408339260
oflintc:  -1.029547890966965942130080408339261964571934735105396751785733739181946
mflintc:  -1.029547890966965942130080408339261964571934735105396751785733739181946012620019366882942770
aflintc: [-1.029547890966965942130080408339261964571934735105396751785733739181946012620019366882942770 +/- 4.07e-80]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> s = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.zetam1(s))))
    fpm:  -0.0110797461302298
    mpm:  -0.011079746130229830775084892221347099268267083615002316952298060975904464385576522474618756l
    dpm:  -0.011079746130229830775084892221347099268267083615002316952298060975904464385576522474618756l
    gpm:  -0.011079746130229830775084892221347099268267083615002316952298060975904464385576522474618756l01
```

(continues on next page)

(continued from previous page)

```
    apm: [-0.011079746130229830775084892221347099268267083615002316952298060975904464385576522473216455 3 +/- 6.70e-80]
cmath53:  -0.0110797461302298
sflintc:  -0.01107976
dflintc:  -0.0110797461302298
eflintc:  -0.011079746130229830772
qflintc:  -0.011079746130229830775084892221347
oflintc:  -0.011079746130229830775084892221347099268267083615002316952298060975904
mflintc:  -0.011079746130229830775084892221347099268267083615002316952298060975904464385576522473216455 3
aflintc: [-0.011079746130229830775084892221347099268267083615002316952298060975904464385576522473216455 3 +/- 4.37e-80]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

9.5.3 Hardy (or Riemann-Siegel) theta function

mathc53.**hardy_theta**(*z*)

Returns the Hardy (or Riemann-Siegel) theta function. See also Wikipedia [1356], MathWorld [1011], Ehrhardt [295] (4.2.52), Mpmath [692] Mpmath [698].

$$\theta(t) = \frac{\log\Gamma\left(\frac{1+2it}{4}\right) - \log\Gamma\left(\frac{1-2it}{4}\right)}{2i} - \frac{\log\pi}{2}t.$$

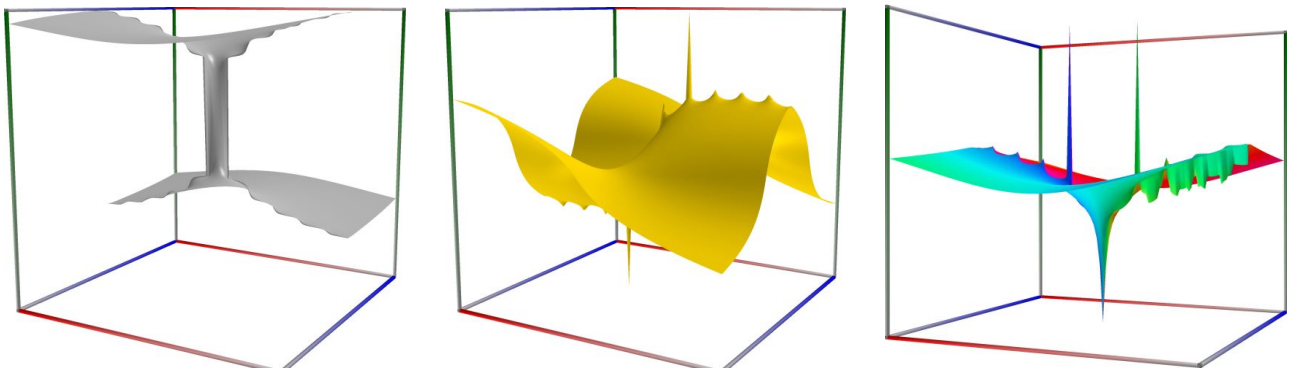

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> t = -5.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.hardy_theta(t)))
    fpm:  -1.00386687567958
    mpm:  -1.00386687567958226052487833515638707891669309861271450469655760220949065254885860931178398
    dpm:  -1.00386687567958226052487833515638707891669309861271450469655760220949065254885860931178398
    gpm:  -1.00386687567958226052487833515638707891669309861271450469655760220949065254885860931178398
    apm: [-1.00386687567958226052487833515638707891669309861271450469655760220949065254885860931178398 +/- 3.85e-80]
 math53:  -1.00386687567958
 sflint:  -1.003867
 dflint:  -1.00386687567958
 eflint:  -1.0038668756795822606
 qflint:  -1.00386687567958226052487833515639
 oflint:  -1.003866875679582260524878333515638707891669309861271450469655760220949106
 mflint:  -1.00386687567958226052487833515638707891669309861271450469655760220949065254885860931377103
 aflint: [-1.00386687567958226052487833515638707891669309861271450469655760220949065254885860931377103 +/- 3.27e-80]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> t = -5.1+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.hardy_theta(t)))
    fpm:  (3.66251710053645, -0.185503504876588)
    mpm:  (3.662517100536445816224427792355338662896, -0.185503504876587606081879512084802598352 8)
cmath53:  (3.66251710053644, -0.185503504876587)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> t = -5.1+2j; gui.setdps(40)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.hardy_theta(t))))
    fpm:  3.66251710053645
```

(continues on next page)

(continued from previous page)

```
    mpm:  3.662517100536445816224427792355338662895763091555723319420733026271526762491575631611221 87
    dpm:  3.662517100536445816224427792355338662895763091555723319420733026271526762491575631611221 87
    gpm:  3.662517100536445816224427792355338662895763091555723319420733026271526762491575631611221 8699
    apm: [3.662517100536445816224427792355338662895763091555723319420733026271526762491575631611221 87 +/- 7.00e-90]
cmath53:  3.66251710053644
sflintc:  3.662517
dflintc:  3.66251710053645
eflintc:  3.6625171005364458162
qflintc:  3.662517100536445816224427792355 34
oflintc:  3.662517100536445816224427792355338662895763091555723319420733026271526 8
mflintc:  3.662517100536445816224427792355338662895763091555723319420733026271526762491575631611221 87
aflintc: [3.662517100536445816224427792355338662895763091555723319420733026271526762491575631611221 9 +/- 4.68e-89]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> t = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.hardy_theta(t))))
    fpm:  -0.185503504876588
    mpm:  -0.1855035048765876060818795120848025983528025491074718931703195928433595191060025172043031 28
    dpm:  -0.1855035048765876060818795120848025983528025491074718931703195928433595191060025172043031 28
    gpm:  -0.1855035048765876060818795120848025983528025491074718931703195928433595191060025172043031 2801
    apm: [-0.1855035048765876060818795120848025983528025491074718931703195928433595191060025172043031 3 +/- 6.47e-90]
cmath53:  -0.185503504876587
sflintc:  -0.1855035
dflintc:  -0.185503504876588
eflintc:  -0.1855035048765876061
qflintc:  -0.185503504876587606081879512084803
oflintc:  -0.18550350487658760608187951208480259835280254910747189317031959284335952
mflintc:  -0.1855035048765876060818795120848025983528025491074718931703195928433595191060025172043031 29
aflintc: [-0.1855035048765876060818795120848025983528025491074718931703195928433595191060025172043031 +/- 3.88e-89]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

9.5.4 Hardy (or Riemann-Siegel) Z function

`mathc53.`**`hardy_z`**`(z)`

Returns the Hardy (or Riemann-Siegel) Z function. See also Wikipedia [1355], MathWorld [1012], NIST [13], Flint [763], Ehrhardt [295] (4.2.52), Mpmath [697].

$$Z(t) = e^{i\theta(t)}\zeta(1/2 + it)$$

where $\zeta(s)$ is the Riemann zeta function and $\theta(t)$ denotes the Riemann-Siegel theta function.

This calls `acb_dirichlet_hardy_z`.

Computes the Z-function, also known as the Riemann-Siegel Z function,

$$Z(t) = e^{i\theta(t)}\zeta(1/2 + it)$$

where $\zeta(s)$ is the Riemann zeta function (*zeta()*) and where $\theta(t)$ denotes the Riemann-Siegel theta function (see *siegeltheta()*).

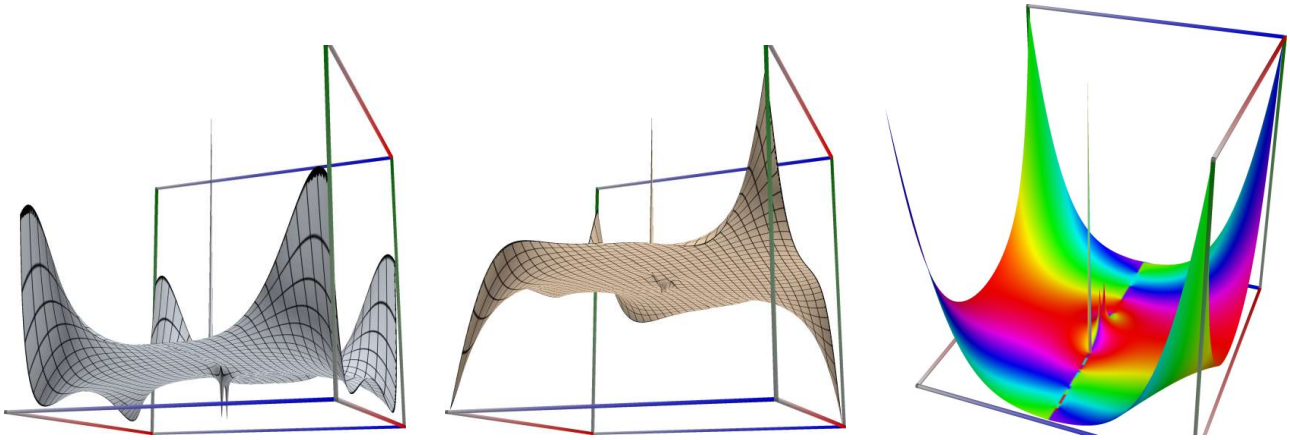

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example with real input:

```
>>> from xlcalcnet import *
>>> t = -5.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.hardy_z(t)))
    fpm:  -0.753729185451756
    mpm:  -0.753729185451756037768888278524587430486657146484138138070418202328823445459246011029483176
    dpm:  -0.753729185451756037768888278524587430486657146484138138070418202328823445459246011029483176
    gpm:  -0.753729185451756037768888278524587430486657146484138138070418202328823445459246011029483176
    apm: [-0.753729185451756037768888278524587430486657146484138138070418202328823445459246011029483176 +/- 6.01e-89]
 math53:  -0.753729185451755
 sflint:  -0.7537292
 dflint:  -0.753729185451756
 eflint:  -0.75372918545175603773
 qflint:  -0.753729185451756037768888278524587
 oflint:  -0.753729185451756037768888278524587430486657146484138138070418202328823445
 mflint:  -0.753729185451756037768888278524587430486657146484138138070418202328823445459246011029483175
 aflint: [-0.753729185451756037768888278524587430486657146484138138070418202328823445459246011029483176 +/- 5.69e-89]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> t = -5.1+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.hardy_z(t)))
```

(continues on next page)

(continued from previous page)

```
    fpm:  (-0.673221934010112, 0.312080070456562)
    mpm:  (-0.673221934010111824364587000458095630631872542018298470787114769429794954022049196281621034
cmath53:  (-0.673221934010115, 0.312080070456557)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> t = -5.1+2j; gui.setdps(40)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.hardy_z(t))))
    fpm:  -0.673221934010112
    mpm:  -0.673221934010111824364587000458095630631872542018298470787114769429794954022049196281621034
    dpm:  -0.673221934010111824364587000458095630631872542018298470787114769429794954022049196281621034
    gpm:  -0.673221934010111824364587000458095630631872542018298470787114769429794954022049196281621034
    apm: [-0.673221934010111824364587000458095630631872542018298470787114769429794954022049196281621 +/- 1.03e-88]
cmath53:  -0.673221934010115
sflintc:  -0.6732219
dflintc:  -0.673221934010112
eflintc:  -0.67322193401011182434
qflintc:  -0.673221934010111824364587000458096
oflintc:  -0.673221934010111824364587000458095630631872542018298470787114769429794954
mflintc:  -0.673221934010111824364587000458095630631872542018298470787114769429794954022049196281621033
aflintc: [-0.673221934010111824364587000458095630631872542018298470787114769429794954022049196281621 +/- 4.70e-89]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> t = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.hardy_z(t))))
    fpm:  0.312080070456562
    mpm:  0.312080070456562041231669710664031924815994128562655188335195827692408417294774919920004686
    dpm:  0.312080070456562041231669710664031924815994128562655188335195827692408417294774919920004686
    gpm:  0.312080070456562041231669710664031924815994128562655188335195827692408417294774919920000468601
    apm: [0.312080070456562041231669710664031924815994128562655188335195827692408417294774919920004 +/- 8.33e-89]
cmath53:  0.312080070456557
sflintc:  0.3120801
dflintc:  0.312080070456562
eflintc:  0.31208007045656204121
qflintc:  0.312080070456562041231669710664032
oflintc:  0.312080070456562041231669710664031924815994128562655188335195827692408
mflintc:  0.312080070456562041231669710664031924815994128562655188335195827692408417294774919920004682
aflintc: [0.312080070456562041231669710664031924815994128562655188335195827692408417294774919920004 +/- 3.19e-89]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

9.5.5 Riemann (Landau) function $\xi(s)$

`ctx.riemann_xi(s)`

Returns the Riemann (Landau) function $\xi(s)$. See also MathWorld [1009], Wikipedia [1348], Flint [758].

Landau's lower-case ξ ("xi") is defined as

$$\xi(s) = \frac{1}{2}s(s-1)\pi^{-s/2}\Gamma\left(\frac{s}{2}\right)\zeta(s)$$

for $s \in \mathbb{C}$. Here $\zeta(s)$ denotes the Riemann zeta function and $\Gamma(s)$ is the Gamma function. The functional equation (or reflection formula) for Landau's ξ is

$$\xi(1-s) = \xi(s)$$

An example with real input:

```
>>> from xlcalcnet import *
>>> t = -5.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.riemann_xi(t)))
    fpm:  1.00874878835143
    mpm:  1.008748788351430550613429945421646151842736561302655455103220571994226013348512726005249O2
    dpm:  1.008748788351430550613429945421646151842736561302655455103220571994226013348512726005249O2
    gpm:  1.008748788351430550613429945421646151842736561302655455103220571994226013348512726005249O2
    apm: [1.008748788351430550613429945421646151842736561302655455103220571994226013348512726005249O +/- 2.90e-89]
 math53:  1.00874878835143
 sflint:  1.008749
 dflint:  1.00874878835143
 eflint:  1.0087487883514305506
 qflint:  1.008748788351430550613429945421650
 oflint:  1.008748788351430550613429945421646151842736561302655455103220571994226
 mflint:  1.008748788351430550613429945421646151842736561302655455103220571994226013348512726005249O2
 aflint: [1.008748788351430550613429945421646151842736561302655455103220571994226013348512726005249O +/- 3.37e-89]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> t = -5.1+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.riemann_xi(t)))
    fpm:  (0.818038184463832, -0.443228752622873)
    mpm:  (0.818038184463832264425814135343989O139234, -0.443228752622873028669669921235542411998O)
cmath53:  (0.818038184463834, -0.443228752622875)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> t = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.riemann_xi(t))))
    fpm:  0.818038184463832
    mpm:  0.818038184463832264425814135343989O139234042359871566215551474351084355482597536526747154S3
    dpm:  0.818038184463832264425814135343989O139234042359871566215551474351084355482597536526747154S3
    gpm:  0.818038184463832264425814135343989O139234042359871566215551474351084355482597536526747154S3
    apm: [0.818038184463832264425814135343989O139234042359871566215551474351084355482597536526747155 +/- 7.44e-89]
cmath53:  0.818038184463834
sflintc:  0.8180382
dflintc:  0.818038184463832
eflintc:  0.8180381844638322644
qflintc:  0.818038184463832264425814135343989
oflintc:  0.818038184463832264425814135343989O139234042359871566215551474351084355S
mflintc:  0.818038184463832264425814135343989O139234042359871566215551474351084355482597536526747154S1
aflintc: [0.818038184463832264425814135343989O139234042359871566215551474351084355482597536526747155 +/- 7.90e-89]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> t = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.riemann_xi(t))))
    fpm:  -0.443228752622873
    mpm:  -0.443228752622873028669669921235542411998910853069868162726667988858141557913499571220113187
    dpm:  -0.443228752622873028669669921235542411998910853069868162726667988858141557913499571220113187
    gpm:  -0.443228752622873028669669921235542411998910853069868162726667988858141557913499571220113187 03
    apm: [-0.443228752622873028669669921235542411998910853069868162726667988858141557913499571220113187 32 +/- 4.03e-89]
cmath53:  -0.443228752622875
sflintc:  -0.4432287
dflintc:  -0.443228752622873
eflintc:  -0.44322875262287302864
qflintc:  -0.443228752622873028669669921235542
oflintc:  -0.443228752622873028669669921235542411998910853069868162726667988858141557913499571220113185
mflintc:  -0.443228752622873028669669921235542411998910853069868162726667988858141557913499571220113185
aflintc: [-0.443228752622873028669669921235542411998910853069868162726667988858141557913499571220113185 32 +/- 4.25e-89]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

9.5.6 Dirichlet eta function, $\eta(s)$

`ctx.dirichlet_eta(x)`

Returns the Dirichlet eta function, defined as $\eta(s) = (1 - 2^{1-s})\zeta(s) = \sum_{k=0}^{\infty} \frac{(-1)^k}{k^s}$ for $s > 0$ and by analytic continuation for $s \leq 0$.

See also: MathWorld [992], Ehrhardt [295] (3.6.3.1), Flint [758], Mpmath [693].

An example with real input:

```
>>> from xlcalcnet import *
>>> t = -5.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.dirichlet_eta(t)))
    fpm:  0.261375667443826
    mpm:  0.261375667443826497797235894737920960572902074803861951448452807043703384120902258263850
    dpm:  0.261375667443826447977923589473792096057290207480386195144845280704370338412090225826385
    gpm:  0.261375667443826447977923589473792096057290207480386195144845280704370338412090225826385000001
    apm: [0.261375667443826447977923589473792096057290207480386195144845280704370338412090225826385000 +/- 2.05e-90]
 math53:  0.261375667443827
 sflint:  0.2613757
 dflint:  0.261375667443826
 eflint:  0.2613756744382644798
 qflint:  0.261375667443826447977923589473792
 oflint:  0.261375667443826447977923589473792096057290207480386195144845280704370338412090225826384
 mflint:  0.261375667443826447977923589473792096057290207480386195144845280704370338412090225826384999
 aflint: [0.261375667443826447977923589473792096057290207480386195144845280704370338412090225826385000 +/- 4.41e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> t = -5.1+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.dirichlet_eta(t)))
    fpm:  (1.0893811681365, -1.86404674937098)
    mpm:  (1.0893811681364994506763351909473940723520, -1.8640467493709774700139340597177189474630)
cmath53:  (1.0893811681365, -1.86404674937097)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> t = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.dirichlet_eta(t))))
    fpm:  1.0893811681365
    mpm:  1.089381168136499450676335190947394072351771253390031260471386978775217890178822876052260110
    dpm:  1.089381168136499450676335190947394072351771253390031260471386978775217890178822876052260110
    gpm:  1.089381168136499450676335190947394072351771253390031260471386978775217890178822876052260110
    apm: [1.089381168136499450676335190947394072351771253390031260471386978775217890178822876052260110 +/- 3.44e-89]
cmath53:  1.0893811681365
sflintc:  1.089381
dflintc:  1.0893811681365
eflintc:  1.0893811681364994
qflintc:  1.089381168136499450676335190947394
oflintc:  1.089381168136499450676335190947394072351771253390031260471386978775217890178822876052260110
mflintc:  1.089381168136499450676335190947394072351771253390031260471386978775217890178822876052260110
aflintc: [1.089381168136499450676335190947394072351771253390031260471386978775217890178822876052260110 +/- 3.66e-89]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> t = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.dirichlet_eta(t))))
    fpm:  -1.86404674937098
```

(continues on next page)

(continued from previous page)

```
    mpm:  -1.864046749370977470013934059717718947463036169189163887904774703611283583282577159787687 92
    dpm:  -1.864046749370977470013934059717718947463036169189163887904774703611283583282577159787687 92
    gpm:  -1.864046749370977470013934059717718947463036169189163887904774703611283583282577159787687 92
    apm: [-1.864046749370977470013934059717718947463036169189163887904774703611283583282577159787687 9 +/- 5.53e-89]
cmath53:  -1.86404674937097
sflintc:  -1.864047
dflintc:  -1.86404674937098
eflintc:  -1.86404674937097747
qflintc:  -1.864046749370977470013934059717 72
oflintc:  -1.864046749370977470013934059717718947463036169189163887904774703611283 6
mflintc:  -1.864046749370977470013934059717718947463036169189163887904774703611283583282577159787687 91
aflintc: [-1.864046749370977470013934059717718947463036169189163887904774703611283583282577159787687 9 +/- 5.76e-89]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

9.5.7 Dirichlet $\eta(s) - 1$

`ctx.dirichlet_eta_m1(`s`)`

Returns the Dirichlet function $\eta(s) - 1 = (\zeta(s) - 1) - (2^{1-s}\zeta(s))$.

See also: MathWorld [992], Ehrhardt [295] (3.6.3.3).

An example with real input:

```
>>> from xlcalcnet import *
>>> t = -5.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.dirichlet_etam1(t)))
    fpm:  -0.738624332556174
    mpm:  -0.738624332556173552022076410526207903942709792519613804855154719295629661587909774173615
    dpm:  -0.738624332556173552022076410526207903942709792519613804855154719295629661587909774173615
    gpm:  -0.738624332556173552022076410526207903942709792519613804855154719295629661587909774173614999999
    apm: [-0.738624332556173552022076410526207903942709792519613804855154719295629661587909774173615000 +/- 2.11e-90]
 math53:  -0.738624332556173
 sflint:  -0.7386243
 dflint:  -0.738624332556174
 eflint:  -0.73862433255617355202
 qflint:  -0.738624332556173552022076410526208
 oflint:  -0.738624332556173552022076410526207903942709792519613804855154719295629661587909774175602048
 mflint:  -0.738624332556173552022076410526207903942709792519613804855154719295629661587909774175602048
 aflint: [-0.738624332556173552022076410526207903942709792519613804855154719295629661587909774175602048 +/- 4.92e-80]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> t = -5.1+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.dirichlet_etam1(t)))
    fpm:  (0.0893811681364994, -1.86404674937098)
    mpm:  (0.089381168136499450676335190947394072351771253390031260471386978775217890178822876052260107 6, -1.86404674937097747001393405971771894746303616918916388790477470361128358328257715978768792)
cmath53:  (0.0893811681364991, -1.86404674937097)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> t = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.dirichlet_etam1(t))))
    fpm:  0.0893811681364994
    mpm:  0.089381168136499450676335190947394072351771253390031260471386978775217890178822876052260107 6
    dpm:  0.089381168136499450676335190947394072351771253390031260471386978775217890178822876052260107 6
    gpm:  0.089381168136499450676335190947394072351771253390031260471386978775217890178822876052260107 6
    apm: [0.089381168136499450676335190947394072351771253390031260471386978775217890178822876052260107 6 +/- 3.44e-89]
cmath53:  0.0893811681364991
sflintc:  0.08938089
dflintc:  0.0893811681364984
eflintc:  0.08938116813649945041 8
qflintc:  0.089381168136499450676335190947393 2
oflintc:  0.089381168136499450676335190947394072351771253390031260471386978775218
mflintc:  0.089381168136499450676335190947394072351771253390031260471386978775217890178822876052260107 6
aflintc: [0.089381168136499450676335190947394072351771253390031260471386978775217890178822876052260107 6 +/- 3.15e-80]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> t = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.dirichlet_etam1(t))))
    fpm:  -1.86404674937098
    mpm:  -1.864046749370977470013934059717718947463036169189163887904774703611283583282577159787687 92
    dpm:  -1.864046749370977470013934059717718947463036169189163887904774703611283583282577159787687 92
    gpm:  -1.864046749370977470013934059717718947463036169189163887904774703611283583282577159787687 92
```

(continues on next page)

(continued from previous page)

```
    apm: [-1.864046749370977470013934059717718947463036169189163887904774703611283583282577159787687 9 +/- 5.53e-89]
cmath53:  -1.86404674937097
sflintc:  -1.864047
dflintc:  -1.86404674937098
eflintc:  -1.86404674937097747
qflintc:  -1.864046749370977470013934059717712
oflintc:  -1.8640467493709774700139340597177189474630361691891638879047747036112 84
mflintc:  -1.864046749370977470013934059717718947463036169189163887904774703611283583282577159786285 61
aflintc: [-1.864046749370977470013934059717718947463036169189163887904774703611283583282577 2 +/- 6.14e-80]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

9.5.8 Dirichlet beta function, $\beta(s)$

`ctx.dirichlet_beta(s)`

Returns the Dirichlet beta function, defined as $\beta(s) = \sum_{n=0}^{\infty} \frac{(-1)^n}{(2n+1)^s}$, for $s > 0$, and by analytic continuation for $s \leq 0$.

See also: Wikipedia [1335], MathWorld [970], Ehrhardt [295] (3.6.4).

Alternatively, the following definition, in terms of the Hurwitz zeta function, is valid in the whole complex s-plane:

$$\beta(s) = 4^{-s}\left(\zeta\left(s, \frac{1}{4}\right) - \zeta\left(s, \frac{3}{4}\right)\right).$$

An example with real input:

```
>>> from xlcalcnet import *
>>> t = -5.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.dirichlet_beta(t)))
    fpm:  -1.41630454157998
    mpm:  -1.41630454157998057372629036423216625027366743356310463519588646988203811806936299539269523
    dpm:  -1.41630454157998057372629036423216625027366743356310463519588646988203811806936299539269523
    gpm:  -1.41630454157998057372629036423216625027366743356310463519588646988203811806936299539269523
    apm: [-1.41630454157998057372629036423216625027366743356310463519588646988203811806936 +/- 4.57e-76]
 math53:  -1.41630454157998
 sflint:  -1.416275
 dflint:  -1.41630454157997
 eflint:  -1.4163045415799805723
 qflint:  -1.41630454157998057372629036423216
 oflint:  -1.41630454157998057372629036423216625027366743356310463519588646988203
 mflint:  -1.41630454157998057372629036423216625027366743356310463519588646988203811806936299424566894
 aflint: [-1.41630454157998057372629036423216625027366743356310463519588646988203811806936 +/- 4.38e-76]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> t = -5.1+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.dirichlet_beta(t)))
    fpm:  (48.3087473278603, -55.9137831543531)
    mpm:  (48.308747327860255554673322616307055521755269354371373321539696783723684520170639282101569803, -55.913783154353088237120700340406078840080)
cmath53:  (48.3087473298217, -55.9137827430533)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> t = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.dirichlet_beta(t))))
    fpm:  48.3087473278603
    mpm:  48.308747327860255554673322616307055521755269354371373321539696783723684520170639282101569803
    dpm:  48.308747327860255554673322616307055521755269354371373321539696783723684520170639282101569803
    gpm:  48.308747327860255554673322616307055521755269354371373321539696783723684520170639282101569803
    apm: [48.308747327860255554673322616307055521755269354371373321539696783723684520170639282101569803 +/- 9.70e-77]
cmath53:  48.3087473298217
sflintc:  48.30877
dflintc:  48.3087473278602
eflintc:  48.308747327860255542
qflintc:  48.308747327860255554673322616307
oflintc:  48.308747327860255554673322616307055521755269354371373321539696783724
mflintc:  48.308747327860255554673322616307055521755269354371373321539696783723684520170639281730573
aflintc: [48.308747327860255554673322616307055521755269354371373321539696783723684520170639281730573 +/- 8.56e-77]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> t = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.dirichlet_beta(t))))
    fpm:  -55.9137831543531
    mpm:  -55.913783154353088237120700340406078840077249160113465620843774879248387437806125437376307 9
    dpm:  -55.913783154353088237120700340406078840077249160113465620843774879248387437806125437376307 9
    gpm:  -55.913783154353088237120700340406078840077249160113465620843774879248387437806125437376307902
    apm: [-55.913783154353088237120700340406078840077249160113465620843774879248387437806 +/- 2.17e-76]
cmath53:  -55.9137827430533
sflintc:  -55.91396
dflintc:  -55.9137831543531
eflintc:  -55.913783154353088236
qflintc:  -55.91378315435308823712070034040 61
oflintc:  -55.913783154353088237120700340406078840077249160113465620843774 87925
mflintc:  -55.913783154353088237120700340406078840077249160113465620843774879248387437806125436127307 9
aflintc: [-55.913783154353088237120700340406078840077249160113465620843774879248387437806 +/- 1.99e-76]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

9.5.9 Dirichlet lambda function, $\lambda(s)$

`ctx.dirichlet_lambda(`s`)`

Returns the Dirichlet lambda function, defined as $\lambda(s) = \sum_{n=0}^{\infty}(2n+1)^{-s}$, $for`s > 1$, and by analytic continuation for $s < 1$.

See also: MathWorld [993], Ehrhardt [295] (3.6.5), Hu and Kim [374].

The function is calculated as

$$\lambda(s) = (1 - 2^{-s})\zeta(s) = -\text{exp2m1}(-s)\zeta(s)$$

An example with real input:

```
>>> from xlcalcnet import *
>>> t = -5.1; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_real: print(ctx.fmtname + ': ' + ctx.fmt(ctx.dirichlet_lambda(t)))
    fpm:  0.128754395882122
    mpm:  0.128754395882122093726522627158702508570298554433835845224143839247439842931615808257300509
    dpm:  0.128754395882122093726522627158702508570298554433835845224143839247439842931615808257300509
    gpm:  0.128754395882122093726522627158702508570298554433835845224143839247439842931615808257300509
    apm: [0.128754395882122093726522627158702508570298554433835845224143839247439842931615808257300509 +/- 9.65e-91]
 math53:  0.128754395882122
 sflint:  0.1287544
 dflint:  0.128754395882122
 eflint:  0.12875439588212209373
 qflint:  0.128754395882122093726522627158702
 oflint:  0.12875439588212209372652262715870250857029855443383584522414383924743984
 mflint:  0.128754395882122093726522627158702508570298554433835845224143839247439842931615808257300509
 aflint: [0.128754395882122093726522627158702508570298554433835845224143839247439842931615808257300509 +/- 2.64e-90]
```

An example with complex input, using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> t = -5.1+2j; gui.setdps(40)
>>> for ctx in [fpm, mpm, cmath53]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.dirichlet_lambda(t)))
    fpm:  (0.529916638584767, -0.937563247750604)
    mpm:  (0.52991663858476675427312739130406605388991825914231725434282661979663593877940175458490992695, -0.93756324775060365039450947595695330233657)
cmath53:  (0.529916638584767, -0.937563247750601)
```

An example with the same complex input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> t = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.dirichlet_lambda(t))))
    fpm:  0.529916638584767
    mpm:  0.529916638584766754273127391304066053889918259142317254342826619796635938779401754584909927
    dpm:  0.529916638584766754273127391304066053889918259142317254342826619796635938779401754584909927
    gpm:  0.529916638584766754273127391304066053889918259142317254342826619796635938779401754584909927
    apm: [0.529916638584766754273127391304066053889918259142317254342826619796635938779401754584909927 +/- 4.06e-89]
cmath53:  0.529916638584767
sflintc:  0.5299165
dflintc:  0.529916638584766
eflintc:  0.52991663858476675413
qflintc:  0.529916638584766754273127391304066
oflintc:  0.52991663858476675427312739130406605388991825914231725434282661979663592
mflintc:  0.529916638584766754273127391304066053889918259142317254342826619796635938779401754584909924
aflintc: [0.529916638584766754273127391304066053889918259142317254342826619796635938779401754584909927 +/- 4.00e-89]
```

An example with the same complex input as above, showing only the imaginary part of the result:

```
>>> from xlcalcnet import *
>>> t = -5.1+2j; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.imag(ctx.dirichlet_lambda(t))))
    fpm:  -0.937563247750604
    mpm:  -0.937563247750603650394509475969533023365651626402083102428536382293594023834076841131153334
    dpm:  -0.937563247750603650394509475969533023365651626402083102428536382293594023834076841131153334
    gpm:  -0.937563247750603650394509475969533023365651626402083102428536382293594023834076841131153334004
    apm: [-0.937563247750603650394509475969533023365651626402083102428536382293594023834076841131153334 +/- 5.58e-89]
cmath53:  -0.937563247750601
sflintc:  -0.9375632
dflintc:  -0.937563247750604
eflintc:  -0.93756324775060365041
qflintc:  -0.937563247750603650394509475969533
oflintc:  -0.937563247750603650394509475969533023365651626402083102428536382293594023
mflintc:  -0.937563247750603650394509475969533023365651626402083102428536382293594023834076841131153338
aflintc: [-0.937563247750603650394509475969533023365651626402083102428536382293594023834076841131153334 +/- 5.65e-89]
```

The above and additional examples can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder for Python (real input), Python (complex input), and C# (real or complex input).

9.5.10 Zeros of the Riemann zeta function

`ctx.zeta_zero(n)`

Returns the zeros of the Riemann zeta function. See also Wikipedia [1354], MathWorld [1010], NIST [14], Mpmath [699].

This calls `acb_dirichlet_zeta_zero`.

Computes the n-th nontrivial zero of $\zeta(s)$ on the critical line, i.e. returns an approximation of the n-th largest complex number $s = \frac{1}{2} + ti$ for which $\zeta(s) = 0$. Equivalently, the imaginary part t is a zero of the Z-function (*siegelz()*).

An example using C#-style formatting for complex numbers for the result

```
>>> from xlcalcnet import *
>>> n = 4; gui.setdps(40)
>>> for ctx in [fpm, mpm]: print(ctx.fmtname + ': ' + ctx.fmt(ctx.zeta_zero(n)))
    fpm:  (0.5, 30.4248761258595)
    mpm:  (0.5, 30.424876125859513210311897530584091320181560023715440180962146036993329389333277920290584 3)
```

An example with the same input as above, showing only the real part of the result:

```
>>> from xlcalcnet import *
>>> n = 4; gui.setdps(90)
>>> for ctx in gui.ctxlist_noboost_cplx:
...     print(ctx.fmtname + ': ' +  ctx.realctx.fmt(ctx.real(ctx.zeta_zero(n))))
    fpm:  0.5
    mpm:  0.5
    dpm:  0.5
    gpm:  0.5
    apm: 0.500000000000
```

CHAPTER

TEN

HYPERGEOMETRIC FUNCTION ${}_0F_1$ AND RELATED

Text explaining this chapter

The source code for the C# tests in Visual Studio is divided by real and complex modules:

The source code for the C# tests in Visual Studio using real modules can be found online in the `XlCalcNet` repository or in the corresponding local `XlCalcNet` folder in the file B10a_RealHypergeometric_0F1.cs,

The source code for the C# tests in Visual Studio using complex modules can be found online in the `XlCalcNet` repository or in the corresponding local `XlCalcNet` folder in the file B10b_CplxHypergeometric_0F1.cs,

10.1 Hypergeometric Limit Function ${}_0F_1$

10.1.1 Confluent Hypergeometric Limit Function ${}_0F_1(b, x)$

`ctx.hyperg_0f1`(b, x)

Returns ${}_0F_1(b, x) = \sum_{k=0}^{\infty} \frac{1}{(b)_k} \frac{x^k}{k!}$, the confluent hypergeometric limit function, where $b \neq 0, -1, -2, \ldots$

See also Wikipedia [1249], MathWorld [897] BoostMath [104], Ehrhardt [295] (3.8.6), Flint [753], Flint [746], Mpmath [588].

If `ctx` is `math53`, `ctxboost` or `ctxflintreal`, then $b, x \in \mathbb{R}$ is exspected. If `ctx` is `cmath53`, then $b \in \mathbb{R}$ and $x \in \mathbb{C}$ is exspected. If `ctx` is `ctxflintcplx` then $b, x \in \mathbb{C}$ is accepted.

Calls `arb_hypgeom_0f1` or `acb_hypgeom_0f1`.

Returns the hypergeometric function ${}_0F_1$.

Gives the hypergeometric function ${}_0F_1$, sometimes known as the confluent limit function, defined as

$$ {}_0F_1(a, z) = \sum_{k=0}^{\infty} \frac{1}{(a)_k} \frac{z^k}{k!}. $$

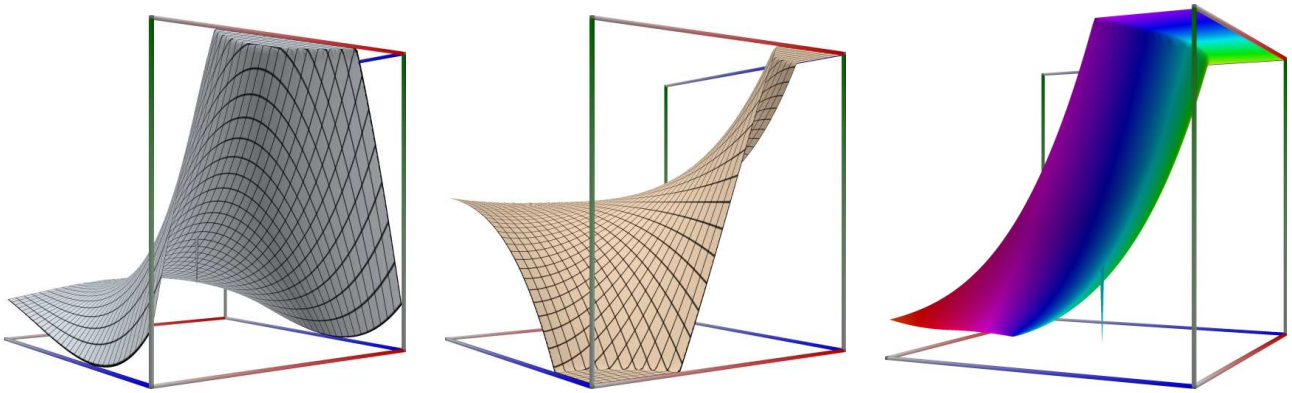

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \leq x \leq 6$ (blue axis), $-6 \leq y \leq 6$ (red axis), $-10 \leq z \leq 10$ (green axis). Function values are *loglog-transformed*.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.Hyperg0F1(5.1,0.5)
ereal('5.2359877559829887307E-1')
>>> math53.Hyperg0F1(15.2,0.5)
ereal('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; a= 10; x = 30
>>> \mathrm{d}x = dec.hyp0f1(a, x); mx = mpm.hyp0f1(a, x); gx = gmp.hyp0f1(a, x)
>>> fx = fpm.hyp0f1(a, x); ax = apm.hyp0f1(a, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  1.4686155009681100647083147826942249952 60E+1
mpm:  1.4686155009681100647083147826942249952 60e+1
gmp:  1.4686155009681100647083147826942249952 60E+01
fpm:  1.46861550096811E+01
apm:  1.4686155009681100647083147826942249952 60e+1 (1.251e-39%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; a= 10; z = '3 + 4j'
>>> \mathrm{d}z = dec.hyp0f1(a, z); mz = mpm.hyp0f1(a, z); gz = gmp.hyp0f1(a, z)
>>> fz = fpm.hyp0f1(a, z); az = apm.hyp0f1(a, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: 1.2521260436915235828E+0              + 5.13718623935804996 00E-1j
mpm: 1.2521260436915235828e+0              + 5.13718623935804996 00e-1j
gmp: 1.2521260436915235828E+00             + 5.13718623935804996 00E-01j
fpm: 1.25212604369152E+00                  + 5.13718623935805E-01j
apm: 1.2521260436915235828e+0 (1.353e-19%) + 5.13718623935804996 00e-1 (8.244e-20%)j
```

10.1.2 Regularized Confluent Hypergeometric Limit Function ${}_0\widetilde{F}_1(b;x)$

`ctx.hyperg_0f1r`(b, x)

Returns ${}_0\widetilde{F}_1(b;x) = \dfrac{1}{\Gamma(b)}{}_0F_1(b;x)$, the regularized confluent hypergeometric limit function, for $b \neq 0, -1, -2, \cdots$, or, if $b = 0, -1, -2, \cdots = -n$, the corresponding limit ${}_0\widetilde{F}_1(b;x) = x^{n+1}{}_0\widetilde{F}_1(n+2;x) = \dfrac{x^{n+1}}{\Gamma(n+2)}{}_0F_1(n+2;x)$.

See also Wikipedia [1249], MathWorld [261] BoostMath [104], Ehrhardt [295] (3.8.7), Flint [753], Flint [746], Mpmath [588].

If `ctx` is `math53`, `ctxboost` or `ctxflintreal`, then $b, x \in \mathbb{R}$ is exspected. If `ctx` is `cmath53`, then $b \in \mathbb{R}$ and $x \in \mathbb{C}$ is exspected. If `ctx` is `ctxflintcplx` then $b, x \in \mathbb{C}$ is accepted.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.Hyperg0F1r(5.1,0.5)
ereal('5.2359877559829887307E-1')
>>> math53.Hyperg0F1r(15.2,0.5)
ereal('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; a= 10; x = 30
>>> \mathrm{d}x = dec.hyp0f1r(a, x); mx = mpm.hyp0f1r(a, x); gx = gmp.hyp0f1r(a, x)
>>> fx = fpm.hyp0f1r(a, x); ax = apm.hyp0f1r(a, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  4.0471106177472168890771461163310873987 54E-5
mpm:  4.0471106177472168890771461163310873987 54e-5
gmp:  4.0471106177472168890771461163310873987 54E-05
fpm:  4.0471106177472 2E-05
apm:  4.0471106177472168890771461163310873987 54e-5 (1.731e-39%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; a= 10; z = '3 + 4j'
>>> \mathrm{d}z = dec.hyp0f1r(a, z); mz = mpm.hyp0f1r(a, z); gz = gmp.hyp0f1r(a, z)
>>> fz = fpm.hyp0f1r(a, z); az = apm.hyp0f1r(a, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: 3.4505237094673820071E-6              + 1.4156708111105737324E-6j
mpm: 3.4505237094673820071e-6              + 1.4156708111105737324e-6j
gmp: 3.4505237094673820071E-06             + 1.41567081111057324E-06j
fpm: 3.45052370946738E-06                  + 1.41567081111057E-06j
apm: 3.4505237094673820071e-6 (9.364e-20%) + 1.4156708111105737324e-6 (1.141e-19%)j
```

10.2 Bessel functions

10.2.1 Bessel function of the 1st kind, $J_\nu(x)$

`ctx.bessel_jv`(*nu*, *x*, *scaled=False*)

Returns $J_\nu(x)$, the Bessel function of the 1st kind.

If *scaled* is *True*, then $J_\nu(x) \cdot \exp(-|\Im(x)|)$ is returned, which means that for purely real x just $J_\nu(x)$ is returned.

See also Wikipedia [1245], MathWorld [874], NIST [438], BoostMath [94], Ehrhardt [295] (3.1.3.1), Flint [752], Flint [743], Mpmath [581].

If `ctx` is `math53`, `ctxboost` or `ctxflintreal`, then $\nu, x \in \mathbb{R}$ is exspected. If `ctx` is `cmath53`, then $\nu \in \mathbb{R}$ and $x \in \mathbb{C}$ is exspected. If `ctx` is `ctxflintcplx` then $\nu, x \in \mathbb{C}$ is accepted.

The function is defined as

$$J_\nu(x) = \left(\tfrac{1}{2}x\right)^\nu \sum_{k=0}^{\infty} (-1)^k \frac{(x^2/4)^k}{k!\Gamma(\nu+k+1)} = \frac{1}{\Gamma(\nu+1)} \left(\frac{z}{2}\right)^\nu {}_0F_1\left(\nu+1, -\frac{z^2}{4}\right).$$

The *wpf figures* below are showing the real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex function $z = J_\nu(x+iy)$ with $\nu = 0$ and $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

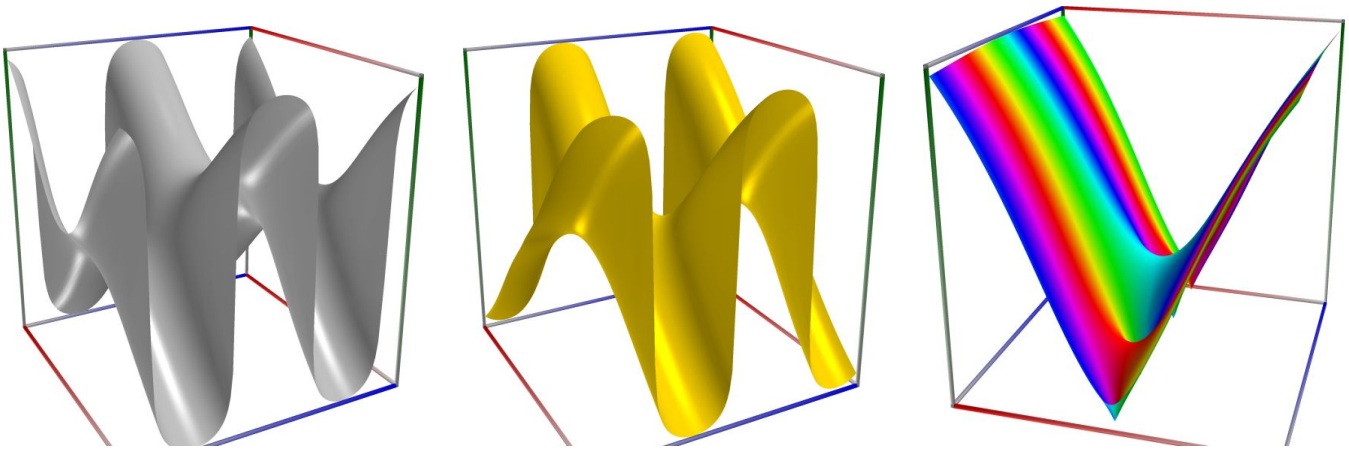

The corresponding scaled function looks like this:

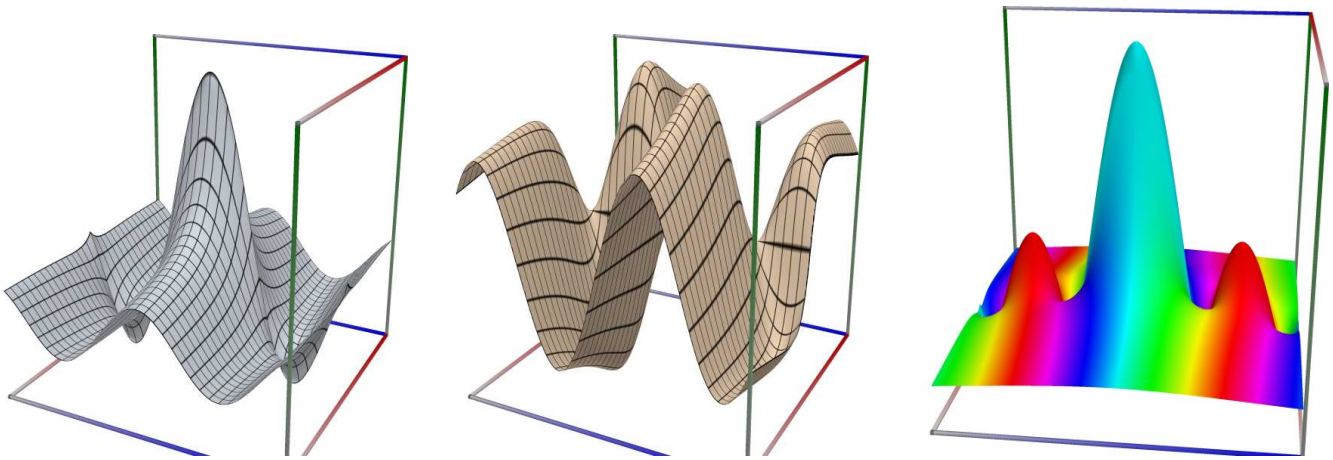

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.BesselJ(3, 0.5)
ereal('5.2359877559829887307E-1')
>>> math53.BesselJ(3, '0.51')
ereal('5.3518479027559984754E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; n= 10; x = 30
>>> \mathrm{d}x = dec.besselj(n, x); mx = mpm.besselj(n, x); gx = gmp.besselj(n, x)
>>> fx = fpm.besselj(n, x); ax = apm.besselj(n, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  -1.298768939985887681859474347649534305196E-1
mpm:  -1.298768939985887681859474347649534305196e-1
gmp:  -1.298768939985887681859474347649534305196E-01
fpm:  -1.29876893998589E-01
apm:  -1.298768939985887681859474347649551192015e-1 (-9.855e-30%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; n= 10; z = '3 + 4j'
>>> \mathrm{d}z = dec.besselj(n, z); mz = mpm.besselj(n, z); gz = gmp.besselj(n, z)
>>> fz = fpm.besselj(n, z); az = apm.besselj(n, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: -2.40287346111284405858E-3               + 1.9815132418922270634E-3j
mpm: -2.40287346111284405858e-3               + 1.9815132418922270634e-3j
gmp: -2.40287346111284405858E-03              + 1.9815132418922270634E-03j
fpm: -2.40287346112844E-03                    + 1.98151324189223E-03j
apm: -2.40287346111284405858e-3 (-6.885e-20%) + 1.9815132418922270634e-3 (8.349e-20%)j
```

10.2.2 Bessel function of the 2nd kind, $Y_\nu(x)$

ctx.bessel_yv(*nu*, *x*, *scaled=False*)

Returns $Y_\nu(z)$ the Bessel function of the second kind.

If *scaled* is *True*, then $Y_\nu(x) \cdot \exp(-|\Im(x)|)$ is returned, which means that for purely real x just $Y_\nu(x)$ is returned.

See also Wikipedia [1246], MathWorld [875], NIST [439], BoostMath [94], Ehrhardt [295] (3.1.3.2), Flint [752], Flint [743], Mpmath [582].

If `ctx` is `math53`, `ctxboost` or `ctxflintreal`, then $\nu, x \in \mathbb{R}$ is exspected. If `ctx` is `cmath53`, then $\nu \in \mathbb{R}$ and $x \in \mathbb{C}$ is exspected. If `ctx` is `ctxflintcplx` then $\nu, x \in \mathbb{C}$ is accepted.

The function is computed from the formula

$$Y_\nu(x) = \frac{\cos(\nu\pi)J_\nu(x) - J_{-\nu}(x)}{\sin(\nu\pi)}$$

unless $\nu = n$ is an integer in which case the limit value is computed.

The *wpf figures* below are showing the real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex function $z = Y_\nu(x + iy)$ with $\nu = 0$ and $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

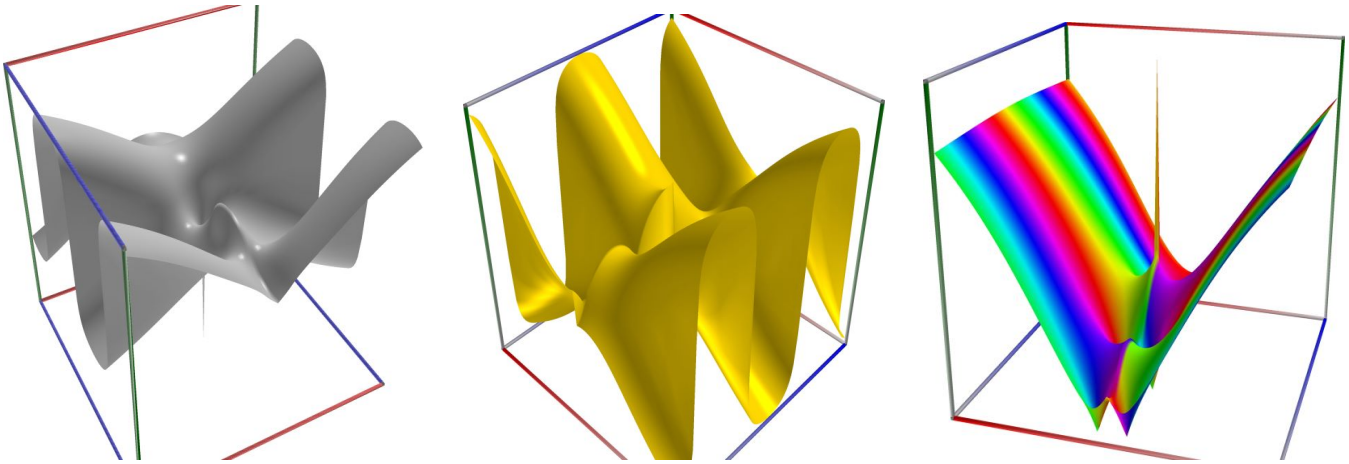

The corresponding scaled function looks like this:

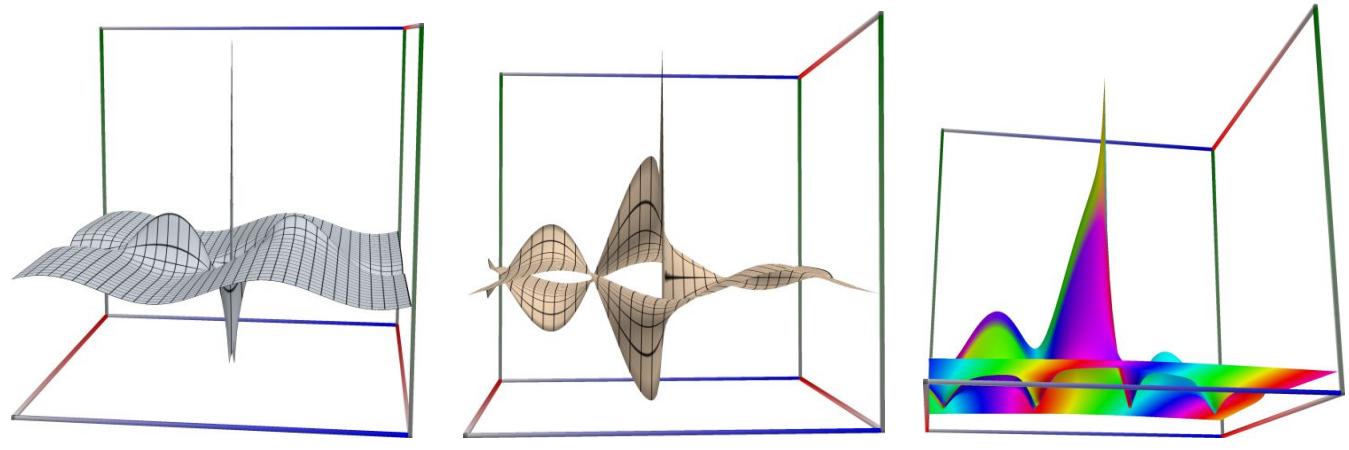

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.BesselY(3, 0.5)
ereal('5.2359877559829887307E-1')
>>> math53.BesselY(3, '0.51')
ereal('5.3518479027559984754E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; n= 10; x = 30
>>> \mathrm{d}x = dec.bessely(n, x); mx = mpm.bessely(n, x); gx = gmp.bessely(n, x)
>>> fx = fpm.bessely(n, x); ax = apm.bessely(n, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  7.505670212239711328867640811591620556875E-2
mpm:  7.505670212239711328867640811591620556875e-2
gmp:  7.505670212239711328867640811591620556875E-02
fpm:  7.50567021223971E-02
apm:  7.505670212239711328867640811591512447084e-2 (2.412e-27%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; n= 10; z = '3 + 4j'
>>> \mathrm{d}z = dec.bessely(n, z); mz = mpm.bessely(n, z); gz = gmp.bessely(n, z)
>>> fz = fpm.bessely(n, z); az = apm.bessely(n, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: 6.7895703730606195794E+0              + 6.9959972339074326549E+0j
mpm: 6.7895703730606195794e+0              + 6.9959972339074326549e+0j
gmp: 6.7895703730606195794E+00             + 6.9959972339074326549E+00j
fpm: 6.78957037306062E+00                  + 6.99599723390743E+00j
apm: 6.7895703730606195794e+0 (3.493e-19%) + 6.9959972339074326549e+0 (3.39e-19%)j
```

10.2.3 First derivative of the Bessel function of the first kind, $J'_\nu(x)$

`ctx.bessel_jv_prime`(*nu*, *x*, *scaled=False*)

Returns $J'_\nu(x)$, the first derivative (with respect to x) of $J_\nu(z)$, the Bessel function of the second kind.

If *scaled* is *True*, then $J'_\nu(x) \cdot \exp(-|\Im(x)|)$ is returned, which means that for purely real x just $J'_\nu(x)$ is returned.

See also Wikipedia [1245], MathWorld [874], NIST [438], BoostMath [94], BoostMath [116].

If `ctx` is `math53`, `ctxboost` or `ctxflintreal`, then $\nu, x \in \mathbb{R}$ is exspected. If `ctx` is `cmath53`, then $\nu \in \mathbb{R}$ and $x \in \mathbb{C}$ is exspected. If `ctx` is `ctxflintcplx` then $\nu, x \in \mathbb{C}$ is accepted.

The function is calculated as $J'_\nu(x) = \frac{1}{2}(J_{\nu-1}(x) - J_{\nu+1}(x))$.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.BesselJPrime(3, 0.5)
ereal('5.2359877559829887307E-1')
>>> math53.BesselJPrime(3, '0.51')
ereal('5.351847902755998475 4E-1')
```

10.2.4 First derivative of the Bessel function of the second kind, $Y'_\nu(x)$

`ctx.bessel_yv_prime`(*nu*, *x*, *scaled=False*)

Returns $Y'_\nu(x)$, the first derivative (with respect to x) of $Y_\nu(z)$, the Bessel function of the second kind.

If *scaled* is *True*, then $Y'_\nu(x) \cdot \exp(-|\Im(x)|)$ is returned, which means that for purely real x just $Y'_\nu(x)$ is returned.

See also Wikipedia [1246], MathWorld [875], NIST [439], BoostMath [94], BoostMath [116].

If `ctx` is `math53`, `ctxboost` or `ctxflintreal`, then $\nu, x \in \mathbb{R}$ is exspected. If `ctx` is `cmath53`, then $\nu \in \mathbb{R}$ and $x \in \mathbb{C}$ is exspected. If `ctx` is `ctxflintcplx` then $\nu, x \in \mathbb{C}$ is accepted.

The function is calculated as $Y'_\nu(x) = \frac{1}{2}(Y_{\nu-1}(x) - Y_{\nu+1}(x))$.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.BesselYPrime(3, 0.5)
ereal('5.2359877559829887307E-1')
>>> math53.BesselYPrime(3, '0.51')
ereal('5.351847902755998475 4E-1')
```

10.2.5 Boost: Zeros $j_{\nu,m}$ of the Bessel function of the first kind: $J_\nu(j_{\nu,m}) = 0$

`ctx.bessel_jv_zero(nu, m)`

where `ctx` is `math53` or `ctxboost`.

For a real order $\nu \geq 0$ and a positive integer m, returns $j_{\nu,m}$, the m-th positive zero of the Bessel function of the first kind $J_\nu(x)$.

See also Wikipedia [1245], MathWorld [944], NIST [440], BoostMath [119], Mpmath [637].

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.BesselJZero(3, 0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.BesselJZero(3, '0.51')
ereal('5.351847902755998475 4E-1')
```

10.2.6 Boost: Zeros $y_{\nu,m}$ of the Bessel function of the first kind: $Y_\nu(y_{\nu,m}) = 0$

`ctx.bessel_yv_zero(nu, m)`

where `ctx` is `math53` or `ctxboost`.

For a real order $\nu \geq 0$ and a positive integer m, returns $y_{\nu,m}$, the m-th positive zero of the Bessel function of the second kind $Y_\nu(x)$.

See also Wikipedia [1246], MathWorld [945], NIST [440], BoostMath [119], Mpmath [638].

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.BesselJZero(3, 0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.BesselJZero(3, '0.51')
ereal('5.351847902755998475 4E-1')
```

10.3 Modified Bessel functions

10.3.1 Modified Bessel function of the 1st kind, $I_\nu(x)$

`ctx.bessel_iv`(*x*, *nu*, *scaled=False*)

Returns $I_\nu(x)$, the modified Bessel function of the first kind.

If *scaled* is *True*, then $I_\nu(x) \cdot \exp(-|\Re(x)|)$ is returned.

See also Wikipedia [1259], MathWorld [903], NIST [443], BoostMath [108], Ehrhardt [295] (3.1.4.1), Flint [752], Flint [750], Mpmath [594].

If `ctx` is `math53`, `ctxboost` or `ctxflintreal`, then $\nu, x \in \mathbb{R}$ is exspected. If `ctx` is `cmath53`, then $\nu \in \mathbb{R}$ and $x \in \mathbb{C}$ is exspected. If `ctx` is `ctxflintcplx` then $\nu, x \in \mathbb{C}$ is accepted.

The function is defined as

$$I_\nu(z) = z^\nu (iz)^{-\nu} J_\nu(iz) = \frac{1}{\Gamma(\nu+1)} \left(\frac{z}{2}\right)^\nu {}_0F_1\left(\nu+1, \frac{z^2}{4}\right).$$

The *wpf figures* below are showing the real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex function $z = I_\nu(x+iy)$ with $\nu = 0$ and $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

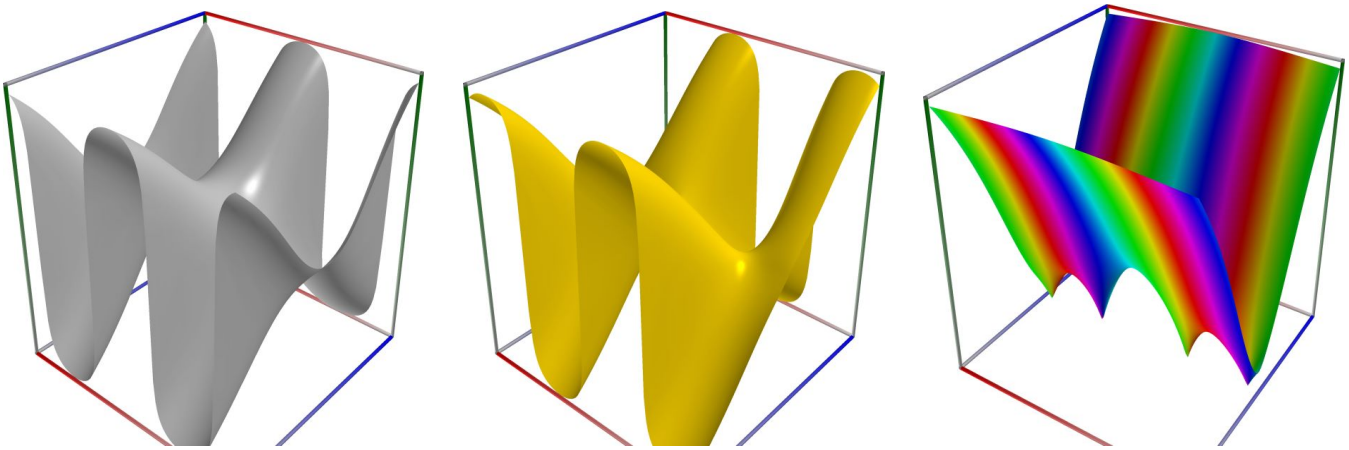

The corresponding scaled function looks like this:

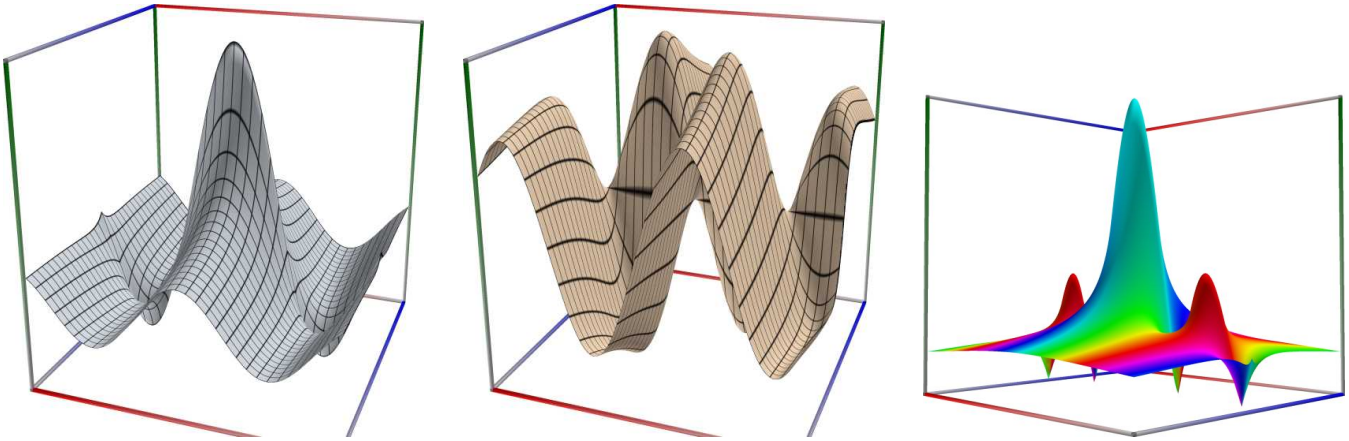

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.BesselI(3, 0.5)
ereal('5.2359877559829887307E-1')
>>> math53.BesselI(3, '0.51')
ereal('5.3518479027559984754E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; n= 10; x = 30
>>> \mathrm{d}x = dec.besseli(n, x); mx = mpm.besseli(n, x); gx = gmp.besseli(n, x)
>>> fx = fpm.besseli(n, x); ax = apm.besseli(n, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  1.458318099759671237651634761704819246948E+11
mpm:  1.458318099759671237651634761704819246948e+11
gmp:  1.458318099759671237651634761704819246948E+11
fpm:  1.45831809975967E+11
apm:  1.458318099759671237651634761704819246948e+11 (2.164e-39%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; n= 10; z = '3 + 4j'
>>> \mathrm{d}z = dec.besseli(n, z); mz = mpm.besseli(n, z); gz = gmp.besseli(n, z)
>>> fz = fpm.besseli(n, z); az = apm.besseli(n, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: -2.089047601208094054 5E-3               - 8.8394935038889455024E-4j
mpm: -2.089047601208094054 5e-3               - 8.8394935038889455024e-4j
gmp: -2.089047601208094054 5E-03              - 8.8394935038889455024E-04j
fpm: -2.08904760120809E-03                    - 8.83949350388895E-04j
apm: -2.089047601208094054 5e-3 (-7.919e-20%) - 8.8394935038889455024e-4 (-9.358e-20%)j
```

10.3.2 Modified Bessel function of the 2nd kind, $K_\nu(x)$

`ctx.bessel_kv`(*x*, *nu*, *scaled=False*)

Returns $K_\nu(x)$, the modified Bessel function of the second kind.

If *scaled* is *True*, then $K_\nu(x) \cdot \exp(x)$ is returned.

See also Wikipedia [1259], MathWorld [904], NIST [444], BoostMath [108], Ehrhardt [295] (3.1.4.3), Flint [752], Flint [750], Mpmath [595].

If `ctx` is `math53`, `ctxboost` or `ctxflintreal`, then $\nu, x \in \mathbb{R}$ is exspected. If `ctx` is `cmath53`, then $\nu \in \mathbb{R}$ and $x \in \mathbb{C}$ is exspected. If `ctx` is `ctxflintcplx` then $\nu, x \in \mathbb{C}$ is accepted.

The function is defined as

$$K_\nu(z) = \tfrac{1}{2}\pi \frac{I_{-\nu}(z) - I_\nu(z)}{\sin(\nu\pi)}.$$

if $\nu \notin \mathbb{Z}$. If $\nu \in \mathbb{Z}$, it computes the limit value.

The *wpf figures* below are showing the real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex function $z = K_\nu(x + iy)$ with $\nu = 0$ and $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

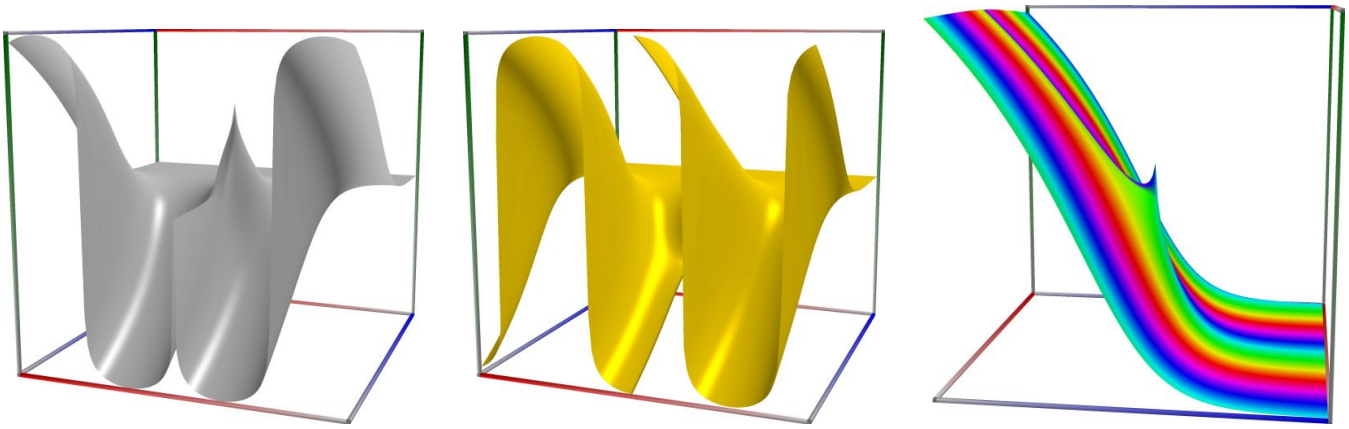

The corresponding scaled function looks like this:

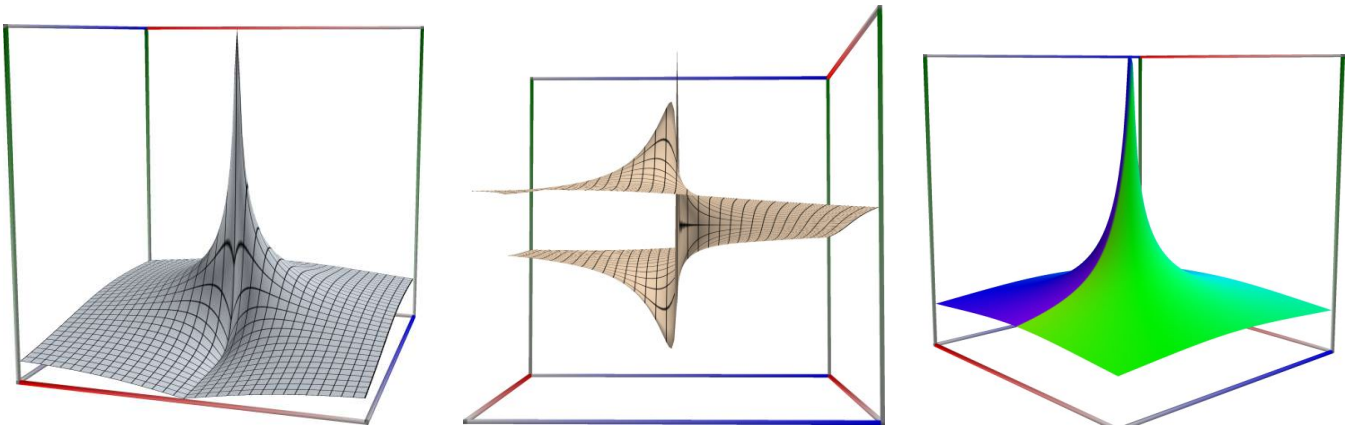

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.BesselK(3, 0.5)
```

(continues on next page)

(continued from previous page)

```
ereal('5.2359877559829887307E-1')
>>> math53.BesselK(3, '0.51')
ereal('5.3518479027559984754E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; n= 10; x = 30
>>> \mathrm{d}x = dec.besselk(n, x); mx = mpm.besselk(n, x); gx = gmp.besselk(n, x)
>>> fx = fpm.besselk(n, x); ax = apm.besselk(n, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  1.0842816942222973911037536135816849208 80E-13
mpm:  1.0842816942222973911037536135816849208 80e-13
gmp:  1.0842816942222973911037536135816849208 80E-13
fpm:  1.08428169422230E-13
apm:  1.0842816942222973908438382241781852751 64e-13 (1.245e-14%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; n= 10; z = '3 + 4j'
>>> \mathrm{d}z = dec.besselk(n, z); mz = mpm.besselk(n, z); gz = gmp.besselk(n, z)
>>> fz = fpm.besselk(n, z); az = apm.besselk(n, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: -1.9416209202983682785E+1               + 1.1318334583389307477E+1j
mpm: -1.9416209202983682785e+1               + 1.1318334583389307477e+1j
gmp: -1.9416209202983682785E+01              + 1.1318334583389307477E+01j
fpm: -1.94162092029837E+01                   + 1.13183345833893E+01j
apm: -1.9416209202983682785e+1 (-2.792e-19%) + 1.1318334583389307477e+1 (3.592e-19%)j
```

10.3.3 First derivative of the modified Bessel function of the first kind $I'_\nu(x)$

`ctx.bessel_iv_prime`(*x*, *nu*, *scaled=False*)

Returns $I'_\nu(x)$, the first derivative (with respect to x) of $I_\nu(z)$, the modified Bessel function of the first kind

If *scaled* is *True*, then $I'_\nu(x) \cdot \exp(-|\Re(x)|)$ is returned.

See also Wikipedia [1259], MathWorld [903], NIST [443], BoostMath [108], BoostMath [116].

If `ctx` is `math53`, `ctxboost` or `ctxflintreal`, then $\nu, x \in \mathbb{R}$ is exspected. If `ctx` is `cmath53`, then $\nu \in \mathbb{R}$ and $x \in \mathbb{C}$ is exspected. If `ctx` is `ctxflintcplx` then $\nu, x \in \mathbb{C}$ is accepted.

The function is calculated as $I'_\nu(x) = \frac{1}{2}(I_{\nu-1}(x) + I_{\nu+1}(x))$.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.BesselIPrime(3, 0.5)
ereal('5.2359877559829887307E-1')
>>> math53.BesselIPrime(3, '0.51')
ereal('5.351847902755998475 4E-1')
```

10.3.4 First derivative of the modified Bessel function of the second kind $K'_\nu(x)$

`ctx.bessel_kv_prime`(*x*, *nu*, *scaled=False*)

Returns $K'_\nu(x)$, the first derivative (with respect to x) of $K_\nu(x)$, the modified Bessel function of the second kind.

If *scaled* is *True*, then $K'_\nu(x) \cdot \exp(x)$ is returned.

See also Wikipedia [1245], MathWorld [874], NIST [438], BoostMath [94], BoostMath [116].

If `ctx` is `math53`, `ctxboost` or `ctxflintreal`, then $\nu, x \in \mathbb{R}$ is exspected. If `ctx` is `cmath53`, then $\nu \in \mathbb{R}$ and $x \in \mathbb{C}$ is exspected. If `ctx` is `ctxflintcplx` then $\nu, x \in \mathbb{C}$ is accepted.

The function is calculated as $K'_\nu(x) = -\frac{1}{2}(K_{\nu-1}(x) + K_{\nu+1}(x))$.

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; n= 10; x = 30
>>> \mathrm{d}x = dec.hankel1(n, x); mx = mpm.hankel1(n, x); gx = gmp.hankel1(n, x)
>>> fx = fpm.hankel1(n, x); ax = apm.hankel1(n, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax],  aligned=True)
dec: -1.2987689399858876819E-1                + 7.5056702122397113289E-2j
mpm: -1.2987689399858876819e-1                + 7.5056702122397113289e-2j
gmp: -1.2987689399858876819E-01               + 7.5056702122397113289E-02j
fpm: -1.29876893998589E-01                    + 7.50567021223971E-02j
apm: -1.2987689399889094748e-1 (-9.932e-10%) + 7.50567021139008222249e-2 (2.838e-6%)j
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; n= 10; z = '3 + 4j'
>>> \mathrm{d}z = dec.hankel1(n, z); mz = mpm.hankel1(n, z); gz = gmp.hankel1(n, z)
>>> fz = fpm.hankel1(n, z); az = apm.hankel1(n, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: -6.9984001073685610955E+0               + 6.7915518863025118064E+0j
mpm: -6.9984001073685610955e+0               + 6.7915518863025118064e+0j
gmp: -6.9984001073685610955E+00              + 6.7915518863025118064E+00j
fpm: -6.99840010736856E+00                   + 6.79155188630251E+00j
apm: -6.9984001073685610955e+0 (-2.13e-18%) + 6.7915518863025118064e+0 (2.145e-18%)j
```

10.3.5 Marcum Q function, $Q_m(a, b)$ (up to octuple precision)

`ctx.marcum_q(`*m*, *a*, *b*`)`

Returns the Marcum Q-function $Q_m(a,b) = \frac{1}{a^{m-1}} \int_b^\infty x^m \exp\left(-\frac{x^2+a^2}{2}\right) I_{m-1}(ax)\,\mathrm{d}x$, where $m > 0$, $b \geq 0$, $a > 0$ and I_{m-1} is the modified Bessel function of first kind of order $m-1$.

See also: Short [497], Wikipedia [1346], MathWorld [1007], Ehrhardt [295] (3.3.17).

It is calculated using its relationship to the noncentral chi-squared cumulative distribution function:

If $X \sim \chi^2_k(\lambda)$ is a non-central chi-squared distribution with non-centrality parameter λ and k degrees of freedom, then its cdf is given by $F_X(x) = 1 - Q_{k/2}(\sqrt{\lambda}, \sqrt{x})$.

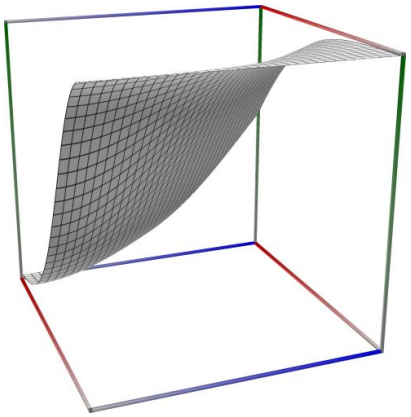

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \leq x \leq 6$ (blue axis), $-6 \leq y \leq 6$ (red axis), $-10 \leq z \leq 10$ (green axis). Function values are *loglog-transformed*.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.MarcumQ(2, 3 ,0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.MarcumQ(2.4, 3.6, ' 0.51')
ereal('5.3518479027559984754E-1')
```

10.4 Spherical Bessel functions

10.4.1 Spherical Bessel function of the first kind, $j_n(x)$

`ctx.sph_bessel_jn(n, x, scaled=False)`

Returns $j_n(x)$, the spherical Bessel function of the first kind.

If *scaled* is *True*, then $j_\nu(x) \cdot \exp(-|\Im(x)|)$ is returned, which means that for purely real x just $j_\nu(x)$ is returned.

See also Wikipedia [1309], MathWorld [939], NIST [445], BoostMath [128], Ehrhardt [295] (3.1.6.1).

Here n and x are, in general, complex numbers. However, if `ctx` is `math53`, `ctxboost` or `ctxflintreal`, then $n \in \mathbb{Z}$ and $x \in \mathbb{R}$ is exspected. If `ctx` is `cmath53`, then $n \in \mathbb{R}$ and $x \in \mathbb{C}$ is exspected. If `ctx` is `ctxflintcplx` then $n, x \in \mathbb{C}$ is accepted.

This function is traditionally defined as $j_n(x) = \sqrt{\frac{1}{2}\pi/x} J_{n+\frac{1}{2}}(x)$, where $J_n(x)$ is a Bessel function of the first kind.

In XlCalcNet, the definition $j_n(x) = \sqrt{\frac{1}{2}\pi}\frac{1}{\sqrt{x}} J_{n+\frac{1}{2}}(x)$ is used instead, which gives identical results for $\Re(x) \geq 0$, but differs from the "traditional version" along the branch cut of the square root function. This ensures that the general definition for complex n and complex x agrees with the results from Rayleigh's formula $j_n(x) = (-x)^n \left(\frac{1}{x}\frac{d}{dx}\right)^n \frac{\sin x}{x}$ for integer $n \geq 0$ and real or complex $x \neq 0$. Given $j_0(x)$ and $j_1(x)$, Rayleigh's formula can also be computed recursively as $j_n(x) = \frac{2n-1}{x} j_{n-1}(x) - j_{n-2}(x)$ for $n \geq 2$.

We extend this to negative integer indices using $j_{-n}(x) = (-1)^n y_{n+1}(x)$ for $n > 0$, where $y_n(x)$ is the spherical Bessel function of the second kind. We also have $j_n(-x) = (-1)^n j_{n+1}(x)$ for $x > 0$.

For $n \in \mathbb{Z}$ and $x \in \mathbb{R}$ the function is real-valued. With $j_0(0) = 1$, $j_n(0) = 0$ for $n > 0$ and $n \neq 0$, $j_n(0) = -\infty$ for even $n < 0$, $j_n(0) =$ NaN for odd $n < 0$, $j_n(-\infty) = j_n(\infty) = 0$, we have the following explicit versions of Rayleigh's formula for $x \neq 0$ and $n = 0, 1, 2, 3$:

$$j_0(x) = \frac{\sin x}{x}.$$

$$j_1(x) = \frac{\sin x}{x^2} - \frac{\cos x}{x}.$$

$$j_2(x) = y_{-1}(x) = \left(\frac{3}{x^2} - 1\right)\frac{\sin x}{x} - \frac{3\cos x}{x^2}.$$

$$j_3(x) = y_{-2}(x) = \left(\frac{15}{x^3} - \frac{6}{x}\right)\frac{\sin x}{x} - \left(\frac{15}{x^2} - 1\right)\frac{\cos x}{x}.$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.SphBesseljn(3, 0.5)
ereal('5.2359877559829887307E-1')
>>> math53.SphBesseljn(3, '0.51')
ereal('5.3518479027559984754E-1')
```

10.4.2 Spherical Bessel function of the second kind, $y_n(x)$

`ctx.sph_bessel_yn`(*n*, *x*, *scaled=False*)

Returns $y_n(x)$, the Spherical Bessel function of the second kind.

If *scaled* is *True*, then $y_\nu(x) \cdot \exp(-|\Im(x)|)$ is returned, which means that for purely real x just $y_\nu(x)$ is returned.

See also Wikipedia [1309], MathWorld [940], NIST [445], BoostMath [128], Ehrhardt [295] (3.1.6.2).

Here n and x are, in general, complex numbers. However, if `ctx` is `math53`, `ctxboost` or `ctxflintreal`, then $n \in \mathbb{Z}$ and $x \in \mathbb{R}$ is exspected. If `ctx` is `cmath53`, then $n \in \mathbb{R}$ and $x \in \mathbb{C}$ is exspected. If `ctx` is `ctxflintcplx` then $n, x \in \mathbb{C}$ is accepted.

This function is traditionally defined as $y_n(x) = \sqrt{\frac{1}{2}\pi/x} Y_{n+\frac{1}{2}}(x)$, where $Y_n(x)$ is a Bessel function of the second kind and, in general, n and x are complex numbers.

In XlCalcNet, the definition $y_n(x) = \sqrt{\frac{1}{2}\pi}\frac{1}{\sqrt{x}} Y_{n+\frac{1}{2}}(x)$ is used instead, which gives identical results for $\Re(x) \geq 0$, but differs from the "traditional version" along the branch cut of the square root function. This ensures that results for real input and complex input with zero imaginary part are the same. It also ensures that the general definition for complex n and complex x agrees with the results from Rayleigh's formula $y_n(x) = -(-x)^n \left(\frac{1}{x}\frac{d}{dx}\right)^n \frac{\cos x}{x}$ for integer $n \geq 0$ and real or complex $x \neq 0$. Given $y_0(x)$ and $y_1(x)$, Rayleigh's formula can also be computed recursively as $y_n(x) = \frac{2n+1}{x} y_{n-1}(x) - y_{n-2}(x)$ for $n \geq 2$.

With $y_n(0) =$ NaN for even n, $y_n(0) = -\infty$ for odd n, $y_n(-\infty) = y_n(\infty) = 0$, we have the following explicit versions of Rayleigh's formula for $x \neq 0$ and $n = 0, 1, 2, 3$:

$$y_0(x) = -j_{-1}(x) = -\frac{\cos x}{x},$$

$$y_1(x) = j_{-2}(x) = -\frac{\cos x}{x^2} - \frac{\sin x}{x},$$

$$y_2(x) = -j_{-3}(x) = \left(-\frac{3}{x^2} + 1\right)\frac{\cos x}{x} - \frac{3\sin x}{x^2},$$

$$y_3(x) = j_{-4}(x) = \left(-\frac{15}{x^3} + \frac{6}{x}\right)\frac{\cos x}{x} - \left(\frac{15}{x^2} - 1\right)\frac{\sin x}{x}.$$

We extend this to negative integer indices using $y_{-n}(x) = (-1)^{n+1} j_{n+1}(x)$ for $n > 0$, where $j_n(x)$ is the spherical Bessel function of the first kind. We also have $y_n(-x) = (-1)^{n+1} y_n(x)$ for $x > 0$. Therefore we can calculate $y_n(x)$ for any $n \in \mathbb{Z}$ and $x \in \mathbb{R}$ without resorting to complex functions, using the general definition with $n \geq 0, x \geq 0$, always obtaining a real result.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.SphBesselyn(3, 0.5)
ereal('5.2359877559829887307E-1')
>>> math53.SphBesselyn(3, '0.51')
ereal('5.3518479027559984754E-1')
```

10.4.3 First derivative of the spherical Bessel function of the first kind, $j_n'(x)$

`ctx.sph_bessel_jn_prime`(*n*, *x*, *scaled=False*)

Returns $j_n'(x)$, the first derivative (with respect to x) of $j_n(x)$, the spherical Bessel function of the first kind.

If *scaled* is *True*, then $j_\nu'(x) \cdot \exp(-|\Im(x)|)$ is returned, which means that for purely real x just $j_\nu'(x)$ is returned.

See also Wikipedia [1309], MathWorld [939], NIST [445], BoostMath [128], Ehrhardt [295] (3.1.6.1).

Here n and x are, in general, complex numbers. However, if `ctx` is `math53`, `ctxboost` or `ctxflintreal`, then $n \in \mathbb{Z}$ and $x \in \mathbb{R}$ is exspected. If `ctx` is `cmath53`, then $n \in \mathbb{R}$ and $x \in \mathbb{C}$ is exspected. If `ctx` is `ctxflintcplx` then $n, x \in \mathbb{C}$ is accepted.

In all cases, the function is calculated as

$j_n'(x) = \dfrac{n j_{n-1}(x) - (n+1) j_{n+1}(x)}{2n+1}$ for $|2n+1| > 0.1$ and $j_n'(x) = j_{n-1}(x) - \dfrac{n+1}{x} j_n(x)$ otherwise.

For $n \in \mathbb{Z}$ and $x \in \mathbb{R}$ the function is real-valued with $j_1'(0) = 1/3$, $j_n'(0) = 0$ for $n \geq 0$ and $n \neq 1$, $j_{-n}'(0) = -\infty$ for odd $n > 0$ and $j_{-n}'(0) =$ NaN for even $n > 0$. We also have $j_n(-\infty) = 0$ and $y_n(\infty) = 0$.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.SphBesseljn(3, 0.5)
ereal('5.2359877559829887307E-1')
>>> math53.SphBesseljn(3, '0.51')
ereal('5.351847902755998475 4E-1')
```

10.4.4 First derivative of the spherical Bessel function of the second kind, $y_n'(x)$

`ctx.sph_bessel_yn_prime`(*n*, *x*, *scaled=False*)

Returns $y_n'(x)$, the first derivative (with respect to x) of $y_n(x)$, the spherical Bessel function of the second kind.

If *scaled* is *True*, then $y_\nu'(x) \cdot \exp(-|\Im(x)|)$ is returned, which means that for purely real x just $y_\nu'(x)$ is returned.

See also Wikipedia [1309], MathWorld [940], NIST [445], BoostMath [128], Ehrhardt [295] (3.1.6.2).

Here n and x are, in general, complex numbers. However, if `ctx` is `math53`, `ctxboost` or `ctxflintreal`, then $n \in \mathbb{Z}$ and $x \in \mathbb{R}$ is exspected. If `ctx` is `cmath53`, then $n \in \mathbb{R}$ and $x \in \mathbb{C}$ is exspected. If `ctx` is `ctxflintcplx` then $n, x \in \mathbb{C}$ is accepted.

In all cases, the function is calculated as

$y_n'(x) = \dfrac{n y_{n-1}(x) - (n+1) y_{n+1}(x)}{2n+1}$ for $|2n+1| > 0.1$ and $y_n'(x) = y_{n-1}(x) - \dfrac{n+1}{x} y_n(x)$ otherwise.

For $n \in \mathbb{Z}$ and $x \in \mathbb{R}$ the function is real-valued with $y_{-2}'(0) = -1/3$, $y_n'(0) = 0$ for $n < 0$ and $n \neq -2$, $y_n'(0) = \infty$ for even $n \geq 0$ and $y_n'(0) =$ NaN for odd $n > 0$. We also have $y_n(-\infty) = 0$ and $y_n(\infty) = 0$.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.SphBesselyn(3, 0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.SphBesselyn(3, '0.51')
ereal('5.351847902755998475 4E-1')
```

10.4.5 Boost: Zeros $a_{n,m}$ of the spherical Bessel function of the first kind: $j_n(a_{n,m}) = 0$

`ctx.sph_bessel_jn_zero(n, m)`

where `ctx` is `math53` or `ctxboost`.

For positive integers n and m, returns $a_{n,m}$, the m-th positive zero of the spherical Bessel function of the first kind $j_n(x)$.

See also Wikipedia [1245], MathWorld [944], NIST [440], BoostMath [119], Mpmath [637].

The function is calculated as $a_{n,m} = j_{n+\frac{1}{2},m}$, where $j_{\nu,m}$ is the m-th positive zero of the Bessel function of the first kind $J_\nu(x)$.

See: https://dlmf.nist.gov/10.58

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.BesselJZero(3, 0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.BesselJZero(3, '0.51')
ereal('5.351847902755998475 4E-1')
```

10.4.6 Boost: Zeros $b_{n,m}$ of the spherical Bessel function of the second kind: $y_n(b_{n,m}) = 0$

`ctx.sph_bessel_yn_zero(`*n*, *m*`)`

where `ctx` is `math53` or `ctxboost`.

For positive integers n and m, returns $b_{n,m}$, the m-th positive zero of the spherical Bessel function of the second kind $y_n(x)$.

Returns the zero of the spherical Bessel function of the second kind. See also Wikipedia [1246], MathWorld [945], NIST [440], BoostMath [119], Mpmath [638].

The function is calculated as $b_{n,m} = y_{n+\frac{1}{2},m}$, where $y_{\nu,m}$ is the m-th positive zero of the Bessel function of the first kind $Y_\nu(x)$.

See https://dlmf.nist.gov/10.58

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.BesselJZero(3, 0.5)
ereal('5.2359877559829887307E-1')
>>> math53.BesselJZero(3, '0.51')
ereal('5.351847902755998475 4E-1')
```

10.5 Modified spherical Bessel functions

10.5.1 Modified spherical Bessel function of the first kind, $i_n(x)$

`ctx.sph_bessel_in(n, x, scaled=False)`

Returns $i_n(x)$, the modified spherical Bessel function of the first kind.

If *scaled* is *True*, then $i_n(x) \cdot \exp(-|\Re(x)|)$ is returned.

See also Wikipedia [1309], MathWorld [937], NIST [445], BoostMath [128], Ehrhardt [295] (3.1.6.3).

Here n and x are, in general, complex numbers. However, if `ctx` is `math53`, `ctxboost` or `ctxflintreal`, then $n \in \mathbb{Z}$ and $x \in \mathbb{R}$ is exspected. If `ctx` is `cmath53`, then $n \in \mathbb{R}$ and $x \in \mathbb{C}$ is exspected. If `ctx` is `ctxflintcplx` then $n, x \in \mathbb{C}$ is accepted.

This function is traditionally defined as $i_n(x) = \sqrt{\frac{1}{2}\pi/x} I_{n+\frac{1}{2}}(x)$, where $I_n(x)$ is a modified Bessel function of the first kind.

In XlCalcNet, the definition $i_n(x) = \sqrt{\frac{1}{2}\pi}\frac{1}{\sqrt{x}} I_{n+\frac{1}{2}}(x)$ is used instead, which gives identical results for $\Re(x) \geq 0$, but differs from the "traditional version" along the branch cut of the square root function. This ensures that results for real input and complex input with zero imaginary part are the same.

It also ensures that the general definition for complex n and complex x agrees with the results from the following two Rayleigh-type formulas:

$i_n(x) = x^n \left(\frac{1}{x}\frac{d}{dx}\right)^n \frac{\sinh(x)}{x}$ for integer $n \geq 0$ and real or complex $x \neq 0$. Given $i_0(x)$ and $i_1(x)$, this Rayleigh-type formula can also be computed recursively as $i_n(x) = \frac{2n-1}{x} i_{n-1}(x) - i_{n-2}(x)$ for $n \geq 2$.

$i_{-n-1}(x) = x^n \left(\frac{1}{x}\frac{d}{dx}\right)^n \frac{\cosh(x)}{x}$ for integer $n \geq 0$ and real or complex $x \neq 0$. Given $i_0(x)$ and $i_1(x)$, this Rayleigh-type formula can also be computed recursively as $i_n(x) = \frac{2n+3}{x} i_{n+1}(x) - i_{n+2}(x)$ for $n \leq -1$.

With $i_0(0) = 1$, $i_n(0) = \text{NaN}$ for even $n \neq 0$, $i_n(0) = -\infty$ for odd n, $i_n(-\infty) = i_n(\infty) = 0$, we have the following explicit versions of the Rayleigh-type formulas for $x \neq 0$ and $n = -3, -2, -1, 0, 1, 2$:

$$i_{-3}(x) = \frac{(3+x^2)\cosh x}{x^3} - \frac{3\sinh x}{x^2},$$

$$i_{-2}(x) = -\frac{\cosh x}{x^2} + \frac{\sinh x}{x},$$

$$i_{-1}(x) = \frac{\cosh x}{x},$$

$$i_0(x) = \frac{\sinh x}{x},$$

$$i_1(x) = -\frac{\sinh x}{x^2} + \frac{\cosh x}{x},$$

$$i_2(x) = \frac{(3+x^2)\sinh x}{x^3} - \frac{3\cosh x}{x^2}.$$

We also have $i_n(-x) = (-1)^n i_n(x)$ for $x > 0$. Therefore we can calculate $i_n(x)$ for any $n \in \mathbb{Z}$ and $x \in \mathbb{R}$ without resorting to complex functions, using the general definition with $n \geq 0$, always obtaining a real result.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.SphBesselin(3, 0.5)
ereal('5.2359877559829887307E-1')
>>> math53.SphBesselin(3, '0.51')
ereal('5.351847902755998475 4E-1')
```

10.5.2 Modified Spherical Bessel function of the second kind, $k_n(x)$

`ctx.sph_bessel_kn`(*n*, *x*, *scaled=False*)

Returns $k_n(x)$, the modified spherical Bessel function of the second kind.

If *scaled* is *True*, then $k_n(x) \cdot \exp(x)$ is returned.

See also Wikipedia [1309], MathWorld [938], NIST [445], BoostMath [128], Ehrhardt [295] (3.1.6.5).

Here n and x are, in general, complex numbers. However, if `ctx` is `math53`, `ctxboost` or `ctxflintreal`, then $n \in \mathbb{Z}$ and $x \in \mathbb{R}$ is exspected. If `ctx` is `cmath53`, then $n \in \mathbb{R}$ and $x \in \mathbb{C}$ is exspected. If `ctx` is `ctxflintcplx` then $n, x \in \mathbb{C}$ is accepted.

This function is traditionally defined as $k_n(x) = \sqrt{\frac{1}{2}\pi/x} K_{n+\frac{1}{2}}(x)$, where $K_n(x)$ is a modified Bessel function of the first kind.

In XlCalcNet, the definition $k_n(x) = \sqrt{\frac{1}{2}\pi}\frac{1}{\sqrt{x}} K_{n+\frac{1}{2}}(x)$ is used instead, which gives identical results for $\Re(x) \geq 0$, but differs from the "traditional version" along the branch cut of the square root function. This ensures that results for real input and complex input with zero imaginary part are the same.

It also ensures that the general definition for complex n and complex x agrees with the results from the following Rayleigh-type formula:

$k_n(x) = \frac{\pi}{2}(-x)^n \left(\frac{1}{x}\frac{d}{dx}\right)^n \frac{e^{-x}}{x}$ for integer $n \geq 0$ and real or complex $x \neq 0$. Given $k_0(x)$ and $k_1(x)$, this Rayleigh-type formula can also be computed recursively as $k_n(x) = \frac{2n-1}{x} k_{n-1}(x) - k_{n-2}(x)$ for $n \geq 2$.

With $k_n(0) = \text{NaN}$ for even n, $k_n(0) = +\infty$ for odd n, $k_n(-\infty) = -\infty$, $k_n(+\infty) = 0$, we have the following explicit versions of the Rayleigh-type formula for $x \neq 0$ and $n = 0, 1, 2$:

$$k_0(x) = \frac{\pi}{2}\frac{1}{x}e^{-x},$$

$$k_1(x) = \frac{\pi}{2}\left(\frac{1}{x^2} + \frac{1}{x}\right)e^{-x},$$

$$k_2(x) = \frac{\pi}{2}\left(\frac{3}{x^3} + \frac{3}{x^2} + \frac{1}{x}\right)e^{-x}.$$

We also have $k_{-n}(x) = k_n(x)$ for $n > 0$ and $k_n(-x) = \frac{\pi}{2}(i_n(x) - i_{-n-1}(x))$ for $x > 0$. Therefore we can calculate $k_n(x)$ for any $n \in \mathbb{Z}$ and $x \in \mathbb{R}$ without resorting to complex functions, using the general definition with $n \geq 0$, always obtaining a real result.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.SphBesselkn(3, 0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.SphBesselkn(3, '0.51')
ereal('5.351847902755998475 4E-1')
```

10.5.3 First derivative of the modified spherical Bessel function of the first kind, $i'_n(x)$

`ctx.sph_bessel_in_prime`(*n*, *x*, *scaled=False*)

Returns $i'_n(x)$, the first derivative (with respect to x) of $i_n(x)$, the modified spherical Bessel function of the first kind.

If *scaled* is *True*, then $i'_n(x) \cdot \exp(-|\Re(x)|)$ is returned.

See also Wikipedia [1309], MathWorld [937], NIST [445], BoostMath [128], Ehrhardt [295] (3.1.6.3).

Here n and x are, in general, complex numbers. However, if `ctx` is `math53`, `ctxboost` or `ctxflintreal`, then $n \in \mathbb{Z}$ and $x \in \mathbb{R}$ is exspected. If `ctx` is `cmath53`, then $n \in \mathbb{R}$ and $x \in \mathbb{C}$ is exspected. If `ctx` is `ctxflintcplx` then $n, x \in \mathbb{C}$ is accepted.

In all cases, the function is calculated as

$i'_n(x) = \dfrac{ni_{n-1}(x) - (n+1)i_{n+1}(x)}{2n+1}$ for $|2n+1| > 0.1$ and $i'_n(x) = i_{n-1}(x) - \dfrac{n+1}{x} i_n(x)$ otherwise.

For $n \in \mathbb{Z}$ and $x \in \mathbb{R}$ the function is real-valued with $i'_1(0) = 1/3$, $i'_n(0) = 0$ for $n \geq 0$ and $n \neq 1$, $i'_{-n}(0) = -\infty$ for odd $n > 0$ and $i'_{-n}(0) =$ NaN for even $n > 0$. We also have $i_n(-\infty) = 0$ and $y_n(\infty) = 0$.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.SphBesselin(3, 0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.SphBesselin(3, '0.51')
ereal('5.351847902755998475 4E-1')
```

10.5.4 First derivative of the modified spherical Bessel function of the second kind, $k_n'(x)$

`ctx.sph_bessel_kn_prime`(*n*, *x*, *scaled=False*)

Returns $k_n'(x)$, the first derivative (with respect to x) of $k_n(x)$, the modified spherical Bessel function of the second kind.

If *scaled* is *True*, then $K_\nu(x) \cdot \exp(x)$ is returned.

See also Wikipedia [1309], MathWorld [938], NIST [445], BoostMath [128], Ehrhardt [295] (3.1.6.5).

Here n and x are, in general, complex numbers. However, if `ctx` is `math53`, `ctxboost` or `ctxflintreal`, then $n \in \mathbb{Z}$ and $x \in \mathbb{R}$ is exspected. If `ctx` is `cmath53`, then $n \in \mathbb{R}$ and $x \in \mathbb{C}$ is exspected. If `ctx` is `ctxflintcplx` then $n, x \in \mathbb{C}$ is accepted.

In all cases, the function is calculated as

$k_n'(x) = \dfrac{nk_{n-1}(x) - (n+1)k_{n+1}(x)}{2n+1}$ for $|2n+1| > 0.1$ and $k_n'(x) = k_{n-1}(x) - \dfrac{n+1}{x}k_n(x)$ otherwise.

For $n \in \mathbb{Z}$ and $x \in \mathbb{R}$ the function is real-valued with $k_n'(0) = -\infty$ for even $n > 0$ and odd $n < 0$ and $k_n'(0) = \text{NaN}$ for odd $n > 0$ and even $n < 0$. We also have $k_n(-\infty) = 0$ and $y_n(\infty) = 0$.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.SphBesselkn(3, 0.5)
ereal('5.2359877559829887307E-1')
>>> math53.SphBesselkn(3, '0.51')
ereal('5.351847902755998475 4E-1')
```

10.5.5 Bessel polynomials $y_n(x)$

`ctx.besselpoly(n, x)`

Returns $y_n(x)$, the Bessel polynomial of order n.

For $n \in \mathbb{Z}$ and $x \in \mathbb{R}$ the function can be defined in terms of the modified spherical Bessel function of the second kind, $k_n(x)$:

$$y_n(x) = 2\pi^{-1}x^{-1}e^{1/x}k_n\left(x^{-1}\right), \quad n \geq 0,$$

and $y_{-n}(x) = y_{n-1}(x)$ for negative order.

The Bessel polynomial may also be defined by a recursion formula:

$$\begin{aligned} y_0(x) &= 1 \\ y_1(x) &= x + 1 \\ y_n(x) &= (2n-1)xy_{n-1}(x) + y_{n-2}(x). \end{aligned} \tag{10.1}$$

The function can be generalized to arbitrary complex n and x by expressing it in terms of Tricomi's confluent hypergeometric function, $U(a, b; x)$:

$$y_n(x) = 2^{n+1}\left(\frac{1}{x}\right)^{n+1} U\left(n+1, 2n+2; \frac{2}{x}\right), x \neq 0$$

and the limit (if it exists) for $x = 0$.

See also Ehrhardt [295] (3.7.19).

See also: https://en.wikipedia.org/wiki/Bessel_polynomials

See also: https://dlmf.nist.gov/18.34

See also: https://mathworld.wolfram.com/BesselPolynomial.html

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.BesselPoly(4, 0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.BesselPoly(4, '0.51')
ereal('5.351847902755998475 4E-1')
```

10.5.6 Reverse Bessel polynomials $\theta_n(x)$

`ctx.besseltheta(n, x)`

Returns $\theta_n(x)$, the reverse Bessel polynomial of order n.

For $n \in \mathbb{Z}$ and $x \in \mathbb{R}$ the function can be defined in terms of the modified spherical Bessel function of the second kind, $k_n(x)$:

$$\theta_n(x) = 2\pi^{-1}x^{n+1}e^x k_n(x), \quad n \geq 0,$$

and $\theta_{-n}(x) = x^{-n}y_{n-1}(1/x)$ for negative order, where $y_n(x)$ is the Bessel polynomial.

The reverse Bessel polynomial may also be defined by a recursion formula:

$$\begin{aligned} \theta_0(x) &= 1 \\ \theta_1(x) &= x + 1 \\ \theta_n(x) &= (2n-1)\theta_{n-1}(x) + x^2\theta_{n-2}(x). \end{aligned} \tag{10.2}$$

The function can be generalized to arbitrary complex n and x by expressing it in terms of Tricomi's confluent hypergeometric function, $U(a, b; x)$:

$$\theta_n(x) = 2^{n+1}x^{2n+1}U\left(n+1, 2n+2, 2x\right), x \neq 0$$

and the limit (if it exists) for $x = 0$.

See also: https://en.wikipedia.org/wiki/Bessel_polynomials

See also: https://dlmf.nist.gov/18.34

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.BesselPoly(4, 0.5)
ereal('5.2359877559829887307E-1')
>>> math53.BesselPoly(4, '0.51')
ereal('5.351847902755998475 4E-1')
```

10.6 Hankel functions

10.6.1 Hankel function of the first kind $H_\nu^{(1)}(x)$

ctx.**hankel_h1**(*nu*, *x*, *scaled=False*)

where ctx is math53 or ctxboost.

Returns the Hankel function of the first kind, defined as $H_\nu^{(1)}(x) = J_\nu(x) + iY_\nu(x)$.

If *scaled* is *True*, then $H_\nu^{(1)e}(x) = H_\nu^{(1)}(x) \cdot \exp(-ix)$ is returned, except for a real ctx where just $H_\nu^{(1)}(x)$ is returned.

If ctx is math53, ctxboost or ctxflintreal, then $\nu, x \in \mathbb{R}$ is exspected. If ctx is cmath53, then $\nu \in \mathbb{R}$ and $x \in \mathbb{C}$ is exspected. If ctx is ctxflintcplx then $\nu, x \in \mathbb{C}$ is accepted.

See also Wikipedia [1300], MathWorld [935], NIST [441], BoostMath [115], Mpmath [626].

```
>>> from xlcalcnet import ecplx
>>> ecplx.HankelH1(10.5, 6.3)
ecplx('5.235987755982988730 7E-1')
>>> ecplx.HankelH1(10.5, 6.3)
ecplx('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; n= 10; x = 30
>>> \mathrm{d}x = dec.hankel1(n, x); mx = mpm.hankel1(n, x); gx = gmp.hankel1(n, x)
>>> fx = fpm.hankel1(n, x); ax = apm.hankel1(n, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax],  aligned=True)
dec: -1.2987689399858876819E-1               + 7.5056702122397113289E-2j
mpm: -1.2987689399858876819e-1               + 7.5056702122397113289e-2j
gmp: -1.2987689399858876819E-01              + 7.5056702122397113289E-02j
fpm: -1.29876893998589E-01                   + 7.50567021223971E-02j
apm: -1.2987689399889094748e-1 (-9.932e-10%) + 7.50567021139008222 49e-2 (2.838e-6%)j
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; n= 10; z = '3 + 4j'
>>> \mathrm{d}z = dec.hankel1(n, z); mz = mpm.hankel1(n, z); gz = gmp.hankel1(n, z)
>>> fz = fpm.hankel1(n, z); az = apm.hankel1(n, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: -6.9984001073685610955E+0              + 6.7915518863025118064E+0j
mpm: -6.9984001073685610955e+0              + 6.7915518863025118064e+0j
gmp: -6.9984001073685610955E+00             + 6.7915518863025118064E+00j
fpm: -6.99840010736856E+00                  + 6.79155188630251E+00j
apm: -6.9984001073685610955e+0 (-2.13e-18%) + 6.7915518863025118064e+0 (2.145e-18%)j
```

10.6.2 Hankel function of the second kind $H_\nu^{(2)}(x)$

`ctx.hankel_h2(nu, x, scaled=False)`

where `ctx` is `math53` or `ctxboost`.

Returns the Hankel function of the second kind, defined as $H_\nu^{(2)}(x) = J_\nu(x) - iY_\nu(x)$.

If *scaled* is *True*, then $H_\nu^{(2)e}(x) = H_\nu^{(2)}(x) \cdot \exp(ix)$ is returned, except for a real `ctx` where just $H_\nu^{(2)}(x)$ is returned.

If `ctx` is `math53`, `ctxboost` or `ctxflintreal`, then $\nu, x \in \mathbb{R}$ is exspected. If `ctx` is `cmath53`, then $\nu \in \mathbb{R}$ and $x \in \mathbb{C}$ is exspected. If `ctx` is `ctxflintcplx` then $\nu, x \in \mathbb{C}$ is accepted.

See also Wikipedia [1300], MathWorld [936], NIST [441], BoostMath [115], Mpmath [627].

```
>>> from xlcalcnet import ecplx
>>> ecplx.HankelH2(10.5, 6.3)
ecplx('5.2359877559829887307E-1')
>>> ecplx.HankelH2(10.5, 6.3)
ecplx('5.3518479027559984754E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; n= 10; x = 30
>>> \mathrm{d}x = dec.hankel2(n, x); mx = mpm.hankel2(n, x); gx = gmp.hankel2(n, x)
>>> fx = fpm.hankel2(n, x); ax = apm.hankel2(n, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax],  aligned=True)
dec: -1.2987689399858876819E-1                - 7.5056702122397113289E-2j
mpm: -1.2987689399858876819e-1                - 7.5056702122397113289e-2j
gmp: -1.2987689399858876819E-01               - 7.5056702122397113289E-02j
fpm: -1.29876893998589E-01                    - 7.50567021223971E-02j
apm: -1.2987689399889094748e-1 (-9.932e-10%) - 7.505670211390082249e-2 (-2.838e-6%)j
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; n= 10; z = '3 + 4j'
>>> \mathrm{d}z = dec.hankel2(n, z); mz = mpm.hankel2(n, z); gz = gmp.hankel2(n, z)
>>> fz = fpm.hankel2(n, z); az = apm.hankel2(n, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: 6.9935943604463042143E+0              - 6.7875888598187273523E+0j
mpm: 6.9935943604463042143e+0              - 6.7875888598187273523e+0j
gmp: 6.9935943604463042143E+00             - 6.7875888598187273523E+00j
fpm: 6.99359436044630E+00                  - 6.78758885981873E+00j
apm: 6.9935943604463042143e+0 (2.132e-18%) - 6.7875888598187273523e+0 (-2.146e-18%)j
```

10.6.3 Spherical Hankel function of the first kind, $h_\nu^{(1)}(x)$

`ctx.`**sph_hankel_h1**(*n*, *x*, *scaled=False*)

where `ctx` is `math53` or `ctxboost`.

Returns the spherical Hankel function of the first kind, defined as $h_n^{(1)}(x) = \sqrt{\frac{1}{2}\pi}\frac{1}{\sqrt{x}}H_\nu^{(1)}(x) = j_\nu(x) + iy_\nu(x)$.

If *scaled* is *True*, then $h_n^{(1)e}(x) = \sqrt{\frac{1}{2}\pi}\frac{1}{\sqrt{x}}H_\nu^{(1)e}(x)$ is returned.

See also Wikipedia [1310], MathWorld [941], NIST [446], BoostMath [129].

Here n and x are, in general, complex numbers. However, if `ctx` is `math53`, `ctxboost` or `ctxflintreal`, then $n \in \mathbb{Z}$ and $x \in \mathbb{R}$ is exspected. If `ctx` is `cmath53`, then $n \in \mathbb{R}$ and $x \in \mathbb{C}$ is exspected. If `ctx` is `ctxflintcplx` then $n, x \in \mathbb{C}$ is accepted.

```
>>> from xlcalcnet import ecplx
>>> ecplx.SphHankelH1(10.5, 6.3)
ecplx('5.2359877559829887307E-1')
>>> ecplx.SphHankelH1(10.5, 6.3)
ecplx('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; n= 10; x = 30
>>> \mathrm{d}x = dec.sph_bessel_yn(n, x); mx = mpm.sph_bessel_yn(n, x); gx = gmp.sph_bessel_yn(n, x)
>>> fx = fpm.sph_bessel_yn(n, x); ax = apm.sph_bessel_yn(n, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax],  aligned=True)
dec: 3.1219591064754935407750389118125397911 38E-2
mpm: 3.1219591064754935407750389118125397911 38e-2
gmp: 3.1219591064754935407750389118125397911 38E-02
fpm: 3.12195910647549E-02
apm: 3.1219591064754935407750389118197367372 26e-2 (1.048e-27%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; n= 10; z = '3 + 4j'
>>> \mathrm{d}z = dec.sph_bessel_yn(n, z); mz = mpm.sph_bessel_yn(n, z); gz = gmp.sph_bessel_yn(n, z)
>>> fz = fpm.sph_bessel_yn(n, z); az = apm.sph_bessel_yn(n, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: 1.0803151721461599990E+1              - 1.7336496520486643470E+0j
mpm: 1.0803151721461599990e+1              - 1.7336496520486643470e+0j
gmp: 1.0803151721461599990E+01             - 1.7336496520486643470E+00j
fpm: 1.08031517214616E+01                  - 1.733649652048 66E+00j
apm: 1.0803151721461599990e+1 (6.962e-18%) - 1.7336496520486643470e+0 (-3.835e-17%)j
```

10.6.4 Spherical Hankel function of the second kind, $h_\nu^{(2)}(x)$

`ctx.`**sph_hankel_h2**(*n*, *x*, *scaled=False*)

where `ctx` is `math53` or `ctxboost`.

Returns the spherical Hankel function of the first kind, defined as $h_n^{(2)}(x) = \sqrt{\frac{1}{2}\pi}\frac{1}{\sqrt{x}}H_\nu^{(2)}(x) = j_\nu(x) - iy_\nu(x)$.

If *scaled* is *True*, then $h_n^{(2)e}(x) = \sqrt{\frac{1}{2}\pi}\frac{1}{\sqrt{x}}H_\nu^{(2)e}(x)$ is returned.

See also Wikipedia [1310], MathWorld [941], NIST [446], BoostMath [129].

Here n and x are, in general, complex numbers. However, if `ctx` is `math53`, `ctxboost` or `ctxflintreal`, then $n \in \mathbb{Z}$ and $x \in \mathbb{R}$ is exspected. If `ctx` is `cmath53`, then $n \in \mathbb{R}$ and $x \in \mathbb{C}$ is exspected. If `ctx` is `ctxflintcplx` then $n, x \in \mathbb{C}$ is accepted.

```
>>> from xlcalcnet import ecplx
>>> ecplx.SphHankelH1(10.5, 6.3)
ecplx('5.2359877559829887307E-1')
>>> ecplx.SphHankelH1(10.5, 6.3)
ecplx('5.3518479027559984754E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; n= 10; x = 30
>>> \mathrm{d}x = dec.hankel2(n, x); mx = mpm.hankel2(n, x); gx = gmp.hankel2(n, x)
>>> fx = fpm.hankel2(n, x); ax = apm.hankel2(n, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax],  aligned=True)
dec: -1.2987689399858876819E-1                - 7.5056702122397113289E-2j
mpm: -1.2987689399858876819e-1                - 7.5056702122397113289e-2j
gmp: -1.2987689399858876819E-01               - 7.5056702122397113289E-02j
fpm: -1.29876893998589E-01                    - 7.50567021223971E-02j
apm: -1.2987689399889094748e-1 (-9.932e-10%) - 7.5056702113900822249e-2 (-2.838e-6%)j
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; n= 10; z = '3 + 4j'
>>> \mathrm{d}z = dec.hankel2(n, z); mz = mpm.hankel2(n, z); gz = gmp.hankel2(n, z)
>>> fz = fpm.hankel2(n, z); az = apm.hankel2(n, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: 6.9935943604463042143E+0              - 6.7875888598187273523E+0j
mpm: 6.9935943604463042143e+0              - 6.7875888598187273523e+0j
gmp: 6.9935943604463042143E+00             - 6.7875888598187273523E+00j
fpm: 6.99359436044630E+00                  - 6.78758885981873E+00j
apm: 6.9935943604463042143e+0 (2.132e-18%) - 6.7875888598187273523e+0 (-2.146e-18%)j
```

10.7 Airy functions

10.7.1 Airy function $\mathrm{Ai}(x)$

`ctx.airy_ai`(*x*, *scaled=False*)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns the Airy function $\mathrm{Ai}(x)$, with $x \in \mathbb{C}$.

If *scaled* is *True*, then $\mathrm{Ai}(x)\exp(\sqrt{x} \cdot 2x/3)$ is returned, except for a real `ctx` with $x \le 0$ where just $\mathrm{Ai}(x)$ is returned.

See also Wikipedia [1289], MathWorld [934], MathWorld [262], NIST [431], BoostMath [112], Ehrhardt [295] (3.1.7.1), Mpmath [618].

The function $\mathrm{Ai}(x)$ can be defined as

$$\mathrm{Ai}(x) = \frac{1}{3^{2/3}\Gamma(2/3)}{}_0F_1\left(\frac{2}{3}, \frac{x^3}{9}\right) - \frac{x}{3^{1/3}\Gamma(1/3)}{}_0F_1\left(\frac{4}{3}, \frac{x^3}{9}\right).$$

The *wpf figures* below are showing the real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex function $z = \mathrm{Ai}(x + iy)$ $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

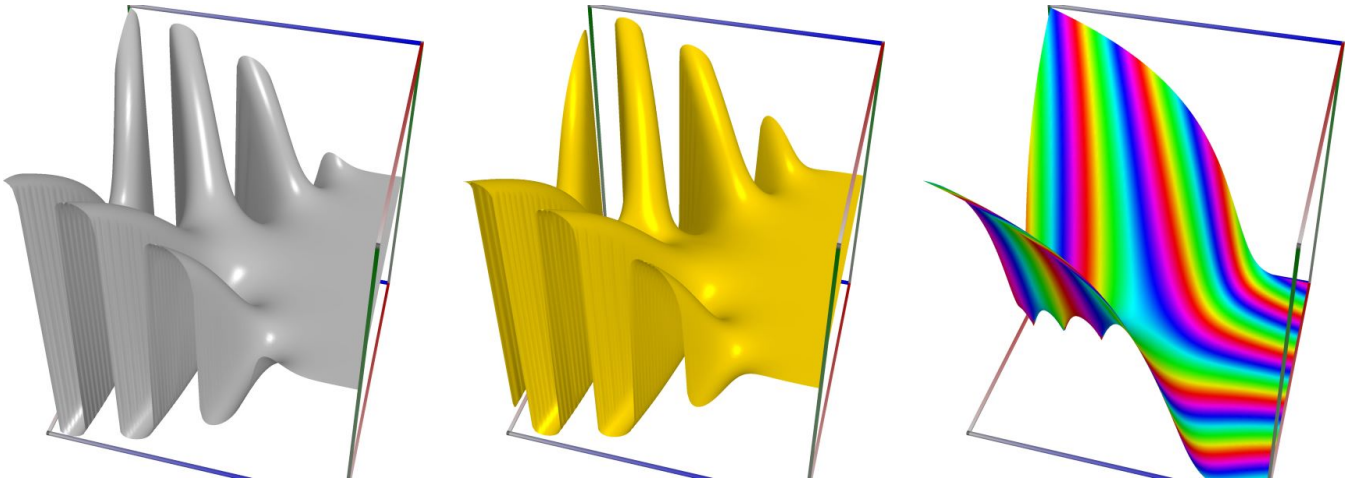

The corresponding scaled function looks like this:

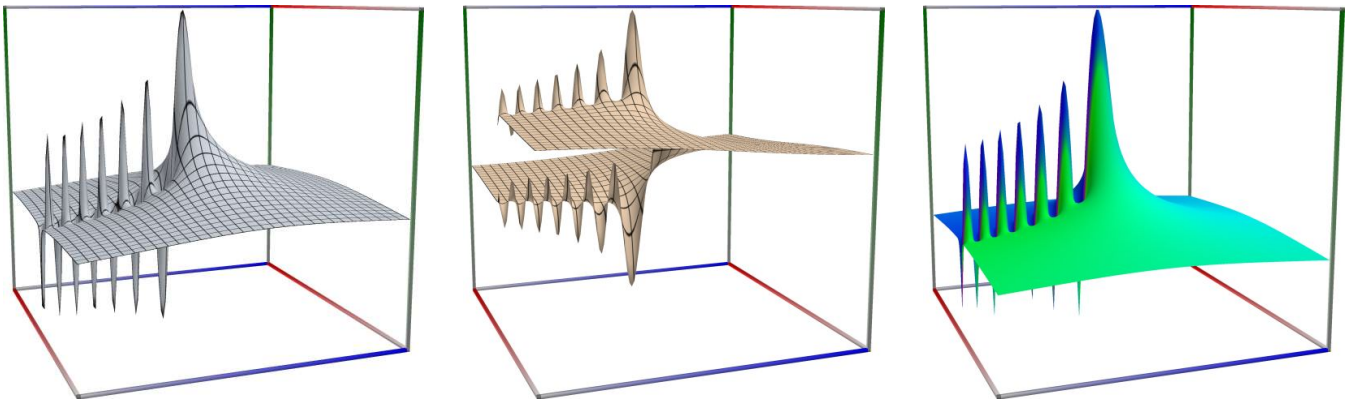

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.AiryAi(0.5)
ereal('5.2359877559829887307E-1')
>>> math53.AiryAi('0.51')
ereal('5.3518479027559984754E-1')
```

10.7.2 Airy function $\mathrm{Bi}(x)$

`ctx.airy_bi`(*x*, *scaled=False*)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns the Airy function $\mathrm{Bi}(x)$, with $x \in \mathbb{C}$.

If *scaled* is *True*, then $\mathrm{Bi}(x)\exp(-|\Re(\sqrt{x}\cdot 2x/3)|)$ is returned, except for a real `ctx` with $x \le 0$ where just $\mathrm{Bi}(x)$ is returned.

See also Wikipedia [1289], MathWorld [934], MathWorld [264], NIST [431], BoostMath [113], Ehrhardt [295] (3.1.7.2), Mpmath [619].

The function $\mathrm{Bi}(x)$ can be defined as

$$\mathrm{Bi}(x) = \frac{1}{3^{1/6}\Gamma(2/3)}{}_0F_1\left(\frac{2}{3}, \frac{x^3}{9}\right) + \frac{3^{1/6}x}{\Gamma(1/3)}{}_0F_1\left(\frac{4}{3}, \frac{x^3}{9}\right).$$

The *wpf figures* below are showing the real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex function $z = \mathrm{Bi}(x+iy)$ with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

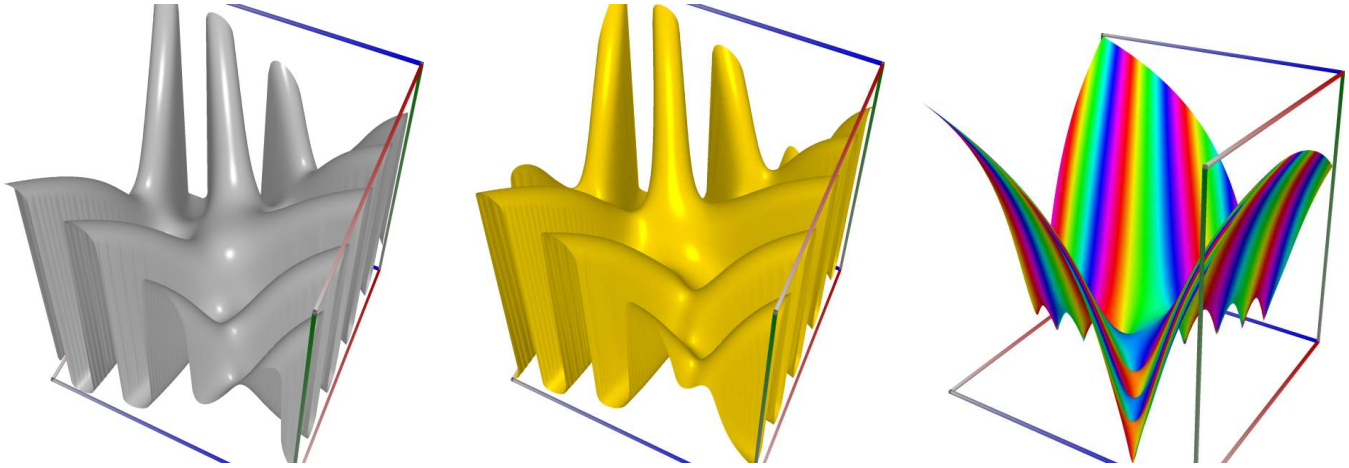

The corresponding scaled function looks like this:

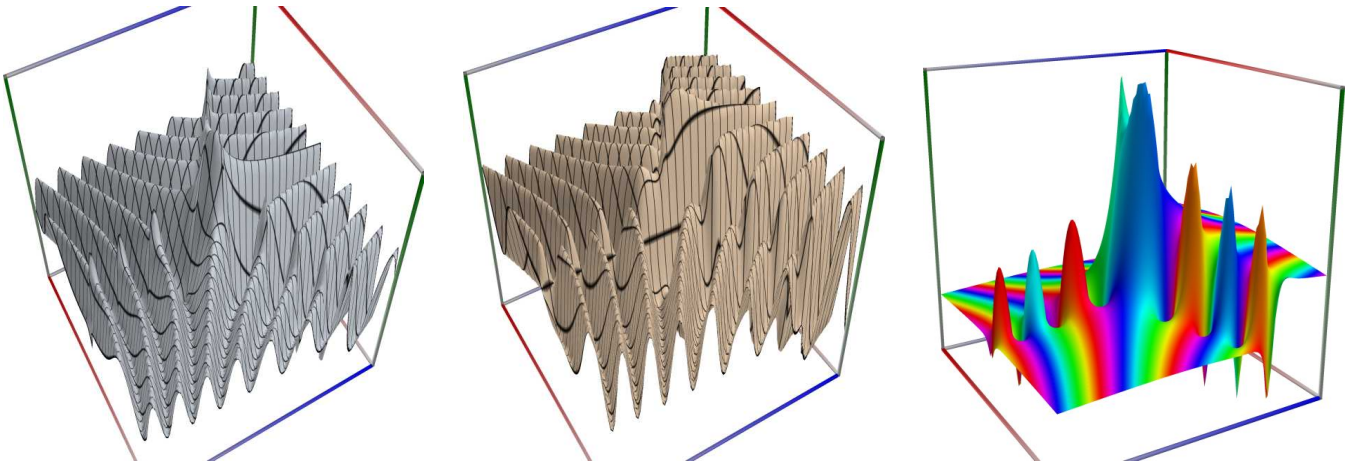

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.AiryBi(0.5)
```

(continues on next page)

(continued from previous page)

```
ereal('5.2359877559829887307E-1')
>>> math53.AiryBi('0.51')
ereal('5.3518479027559984754E-1')
```

10.7.3 First derivative of the Airy function Ai, $\mathrm{Ai}'(x)$

`ctx.airy_ai_prime`(*x*, *scaled=False*)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns $\mathrm{Ai}'(x)$, the first derivative (with respect to x) of the Airy function $\mathrm{Ai}(x)$, with $x \in \mathbb{C}$.

If *scaled* is *True*, then $\mathrm{Ai}'(x)\exp(\sqrt{x}\cdot 2x/3)$ is returned, except for a real `ctx` with $x \le 0$ where just $\mathrm{Ai}'(x)$ is returned.

See also Wikipedia [1289], MathWorld [934], MathWorld [263], NIST [431], BoostMath [132], Ehrhardt [295] (3.1.7.3).

The function $\mathrm{Ai}'(x)$ can be defined as

$$\mathrm{Ai}'(x) = \frac{x^2}{2\cdot 3^{2/3}\Gamma(2/3)}{}_0F_1\left(\frac{5}{3}, \frac{x^3}{9}\right) - \frac{1}{3^{1/3}\Gamma(1/3)}{}_0F_1\left(\frac{1}{3}, \frac{x^3}{9}\right).$$

The *wpf figures* below are showing the real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex function $z = \mathrm{Ai}'(x+iy)$ with $\nu = 0$ and $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.AiryAiPrime(0.5)
ereal('5.2359877559829887307E-1')
>>> math53.AiryAiPrime('0.51')
ereal('5.3518479027559984754E-1')
```

10.7.4 First derivative of the Airy function Bi, $\mathrm{Bi}'(x)$

`ctx.airy_bi_prime`(*x*, *scaled=False*)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns $\mathrm{Bi}'(x)$, the first derivative (with respect to x) of the Airy function $\mathrm{Bi}(x)$, with $x \in \mathbb{C}$.

If *scaled* is *True*, then $\mathrm{Bi}'(x)\exp(-|\Re(\sqrt{x}\cdot 2x/3)|)$ is returned, except for a real `ctx` with $x \le 0$ where just $\mathrm{Bi}'(x)$ is returned.

See also Wikipedia [1289], MathWorld [934], MathWorld [265], NIST [431], BoostMath [133], Ehrhardt [295] (3.1.7.4) and (3.1.7.6).

The function can be defined as

$$\mathrm{Bi}'(x) = \frac{x^2}{2\cdot 3^{1/6}\Gamma(2/3)}{}_0F_1\left(\frac{5}{3}, \frac{x^3}{9}\right) + \frac{3^{1/6}}{\Gamma(1/3)}{}_0F_1\left(\frac{1}{3}, \frac{x^3}{9}\right).$$

The *wpf figures* below are showing the real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex function $z = \mathrm{Bi}'(x+iy)$ with $\nu = 0$ and $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.AiryAiPrime(0.5)
ereal('5.2359877559829887307E-1')
>>> math53.AiryAiPrime('0.51')
ereal('5.3518479027559984754E-1')
```

10.7.5 Real zeros a_k of the Airy function Ai, $\mathrm{Ai}(a_k) = 0$

`ctx.airy_ai_zero(`k`)`

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns the k-th zero of the Airy Ai-function. See also MathWorld [942], NIST [431], BoostMath [113], BoostMath [133], Mpmath [635].

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.AiryAiZero(5)
ereal('5.235987755982988730 7E-1')
>>> math53.AiryAiZero(17)
ereal('5.351847902755998475 4E-1')
```

10.7.6 Real zeros b_k of the Airy function Bi, $\mathrm{Bi}(b_k) = 0$

`ctx.airy_bi_zero(`k`)`

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns the k-th zero of the Airy Bi-function. See also Wikipedia [1289], NIST [431], MathWorld [943], BoostMath [140], Mpmath [636].

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.AiryBiZero(5)
ereal('5.235987755982988730 7E-1')
>>> math53.AiryBiZero(17)
ereal('5.351847902755998475 4E-1')
```

10.8 Kelvin functions

10.8.1 Kelvin function $\mathrm{ber}(\nu, x)$

`ctx.kelvin_ber`(*nu*, *z*, *scaled=False*)

Returns the Kelvin function $\mathrm{ber}(\nu, x)$.

If *scaled* is *True*, then $\mathrm{ber}(\nu, x) \cdot \exp(-|x|/\sqrt{2})$ is returned.

See also Wikipedia [1374], MathWorld [1017], NIST [442], Mpmath [704].

Here ν and x are, in general, complex numbers. However, if `ctx` is `math53`, then $\nu \in \mathbb{R}$ and $x \in \mathbb{R}$ is exspected. If `ctx` is `cmath53`, then $\nu \in \mathbb{R}$ and $x \in \mathbb{C}$ is exspected. If `ctx` is `ctxflint` then $n, x \in \mathbb{C}$ is accepted.

This function is traditionally defined for $\nu \in \mathbb{R}$ and real $x \geq 0$ as the real part of the Bessel J function of a rotated argument:

$$\mathrm{ber}(\nu, x) = \Re\Big(J_\nu\big(xe^{3\pi i/4}\big)\Big).$$

In XlCalcNet this is generalized to complex ν and x following the definition given in Maple [367] as

$$\mathrm{ber}(\nu, x) = \frac{J_\nu(x(-a+ia)) + J_\nu(x(-a-ia))}{2}, \quad \text{where } a = \tfrac{1}{2}\sqrt{2},$$

which is equivalent to the traditional definition for $\nu \in \mathbb{R}$ and real $x \geq 0$.

Note that this differs from Mpmath, which uses the conventions of Mathematica.

The Kelvin functions are all real valued for real x and positive ν.

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; n = 0; x = 3
>>> \mathrm{d}x = dec.kelvinber(n, x); mx = mpm.kelvinber(n, x); gx = gmp.kelvinber(n, x)
>>> fx = fpm.kelvinber(n, x); ax = apm.kelvinber(n, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax],  aligned=True)
dec: -2.213802495986938888682464345899509922321E-1
mpm: -2.213802495986938888682464345899509922321e-1
gmp: -2.213802495986938888682464345899509922321E-01
fpm: -2.21380249598694E-01
apm: -2.213802495986938888682464345899509922332e-1 (-1.283e-37%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; z = '3 + 4j'
>>> \mathrm{d}z = dec.kelvinber(n, z); mz = mpm.kelvinber(n, z); gz = gmp.kelvinber(n, z)
>>> fz = fpm.kelvinber(n, z); az = apm.kelvinber(n, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: 1.0336162101792974294E+1              + 7.7667689132221259171E+0j
mpm: 1.0336162101792974294e+1              + 7.7667689132221259171e+0j
gmp: 1.0336162101792974294E+01             + 7.7667689132221259171E+00j
fpm: 1.03361621017930E+01                  + 7.76676891322213E+00j
apm: 1.0336162101792974294e+1 (2.032e-18%) + 7.7667689132221259171e+0 (2.225e-18%)j
```

10.8.2 Kelvin function $\mathrm{bei}(\nu, x)$

`ctx.kelvin_bei`(*nu*, *z*, *scaled=False*)

Returns the Kelvin function $\mathrm{bei}(\nu, x)$.

If *scaled* is *True*, then $\mathrm{bei}(\nu, x) \cdot \exp(-|x|/\sqrt{2})$ is returned.

See also Wikipedia [1373], MathWorld [1016], NIST [442], Mpmath [703].

Here ν and x are, in general, complex numbers. However, if `ctx` is `math53`, then $\nu \in \mathbb{R}$ and $x \in \mathbb{R}$ is exspected. If `ctx` is `cmath53`, then $\nu \in \mathbb{R}$ and $x \in \mathbb{C}$ is exspected. If `ctx` is `ctxflint` then $n, x \in \mathbb{C}$ is accepted.

This function is traditionally defined for $\nu \in \mathbb{R}$ and real $x \geq 0$ as the imaginary part of the Bessel J function of a rotated argument:

$$\mathrm{bei}(\nu, x) = \Im\Big(J_\nu\big(xe^{3\pi i/4}\big)\Big).$$

In XlCalcNet this is generalized to complex ν and x following the definition given in Maple [367] as

$$\mathrm{bei}(\nu, x) = \frac{J_\nu(x(-a+ia)) - J_\nu(x(-a-ia))}{2}, \quad \text{where } a = \tfrac{1}{2i}\sqrt{2},$$

which is equivalent to the traditional definition for $\nu \in \mathbb{R}$ and real $x \geq 0$.

Note that this differs from Mpmath, which uses the conventions of Mathematica.

The Kelvin functions are all real valued for real x and positive ν.

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; n = 0; x = 3
>>> \mathrm{d}x = dec.kelvinbei(n, x); mx = mpm.kelvinbei(n, x); gx = gmp.kelvinbei(n, x)
>>> fx = fpm.kelvinbei(n, x); ax = apm.kelvinbei(n, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax],  aligned=True)
dec: 1.937586785266042766896808122272260201255E+0
mpm: 1.937586785266042766896808122272260201255e+0
gmp: 1.937586785266042766896808122272260201255E+00
fpm: 1.93758678526604E+00
apm: 1.937586785266042766896808122272260201256e+0 (1.54e-38%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; z = '3 + 4j'
>>> \mathrm{d}z = dec.kelvinbei(n, z); mz = mpm.kelvinbei(n, z); gz = gmp.kelvinbei(n, z)
>>> fz = fpm.kelvinbei(n, z); az = apm.kelvinbei(n, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: -7.5192613426702233947E+0               + 1.0562898806171521533E+1j
mpm: -7.5192613426702233947e+0               + 1.0562898806171521533e+1j
gmp: -7.5192613426702233947E+00              + 1.0562898806171521533E+01j
fpm: -7.51926134267022E+00                   + 1.05628988061715E+01j
apm: -7.5192613426702233946e+0 (-2.298e-18%) + 1.0562898806171521533e+1 (1.989e-18%)j
```

10.8.3 Kelvin function $\ker(\nu, x)$

`ctx.kelvin_ker`(*nu*, *z*, *scaled=False*)

Returns the Kelvin function $\ker(\nu, x)$.

If *scaled* is *True*, then $\mathrm{bei}(\nu, x) \cdot \exp(|x|/\sqrt{2})$ is returned.

See also Wikipedia [1376], MathWorld [1019], NIST [442], Mpmath [706].

Here ν and x are, in general, complex numbers. However, if `ctx` is `math53`, then $\nu \in \mathbb{R}$ and $x \in \mathbb{R}$ is exspected. If `ctx` is `cmath53`, then $\nu \in \mathbb{R}$ and $x \in \mathbb{C}$ is exspected. If `ctx` is `ctxflint` then $n, x \in \mathbb{C}$ is accepted.

This function is traditionally defined for $\nu \in \mathbb{R}$ and real $x \geq 0$ as the real part of the Bessel K function of a rotated argument:

$$\ker(\nu, x) = \Re\Big(e^{-\pi i/2} K_n\big(x e^{3\pi i/4}\big)\Big).$$

In XlCalcNet this is generalized to complex ν and x following the definition given in Maple [367] as

$$\ker(\nu, x) = \frac{e^{-i\nu\pi/2} K_\nu(x(a+ia)) + e^{i\nu\pi/2} K_\nu(x(a-ia))}{2}, \quad \text{where } a = \tfrac{1}{2}\sqrt{2},$$

which is equivalent to the traditional definition for $\nu \in \mathbb{R}$ and real $x \geq 0$.

Note that this differs from Mpmath, which uses the conventions of Mathematica.

The Kelvin functions are all real valued for real x and positive ν.

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; n = 0; x = 3
>>> \mathrm{d}x = dec.kelvinker(n, x); mx = mpm.kelvinker(n, x); gx = gmp.kelvinker(n, x)
>>> fx = fpm.kelvinker(n, x); ax = apm.kelvinker(n, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax],  aligned=True)
dec: -6.702923330379869775199782194748322134382E-2
mpm: -6.702923330379869775199782194748322134382e-2
gmp: -6.702923330379869775199782194748322134382E-02
fpm: -6.70292333037987E-02
apm: -6.702923330379869775199782194748322134370e-2 (-8.669e-36%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; z = '3 + 4j'
>>> \mathrm{d}z = dec.kelvinker(n, z); mz = mpm.kelvinker(n, z); gz = gmp.kelvinker(n, z)
>>> fz = fpm.kelvinker(n, z); az = apm.kelvinker(n, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: 5.0016351579287135729E-1              + 2.7244626208949455251E-1j
mpm: 5.0016351579287135729e-1              + 2.7244626208949455251e-1j
gmp: 5.0016351579287135729E-01             + 2.7244626208949455251E-01j
fpm: 5.00163515792871E-01                  + 2.72446262089495E-01j
apm: 5.0016351579287135710e-1 (2.917e-15%) + 2.7244626208949455183e-1 (4.106e-15%)j
```

10.8.4 Kelvin function $\mathrm{kei}(\nu, x)$

`ctx.kelvin_kei`(*nu*, *z*, *scaled=False*)

Returns the Kelvin function $\mathrm{kei}(\nu, x)$.

If *scaled* is *True*, then $\mathrm{kei}(\nu, x) \cdot \exp(|x|/\sqrt{2})$ is returned.

See also Wikipedia [1375], MathWorld [1018], NIST [442], Mpmath [705].

Here ν and x are, in general, complex numbers. However, if `ctx` is `math53`, then $\nu \in \mathbb{R}$ and $x \in \mathbb{R}$ is exspected. If `ctx` is `cmath53`, then $\nu \in \mathbb{R}$ and $x \in \mathbb{C}$ is exspected. If `ctx` is `ctxflint` then $n, x \in \mathbb{C}$ is accepted.

This function is traditionally defined for $\nu \in \mathbb{R}$ and real $x \geq 0$ as the imaginary part of the Bessel K function of a rotated argument:

$$\mathrm{kei}(\nu, x) = \Im\left(e^{-\pi i/2} K_n\left(x e^{3\pi i/4}\right)\right).$$

In XlCalcNet this is generalized to complex ν and x following the definition given in Maple [367] as

$$\mathrm{kei}(\nu, x) = \frac{e^{-i\nu\pi/2} K_\nu(x(a+ia)) - e^{i\nu\pi/2} K_\nu(x(a-ia))}{2i}, \quad \text{where } a = \tfrac{1}{2}\sqrt{2}.$$

which is equivalent to the traditional definition for $\nu \in \mathbb{R}$ and real $x \geq 0$.

Note that this differs from Mpmath, which uses the conventions of Mathematica.

The Kelvin functions are all real valued for real x and positive ν.

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; n = 0; x = 3
>>> \mathrm{d}x = dec.kelvinkei(n, x); mx = mpm.kelvinkei(n, x); gx = gmp.kelvinkei(n, x)
>>> fx = fpm.kelvinkei(n, x); ax = apm.kelvinkei(n, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax],  aligned=True)
dec: -5.1121884045986781402466877539305017057 62E-2
mpm: -5.1121884045986781402466877539305017057 62e-2
gmp: -5.1121884045986781402466877539305017057 62E-02
fpm: -5.11218840459868E-02
apm: -5.1121884045986781402466877539305017057 53e-2 (-9.353e-36%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; z = '3 + 4j'
>>> \mathrm{d}z = dec.kelvinkei(n, z); mz = mpm.kelvinkei(n, z); gz = gmp.kelvinkei(n, z)
>>> fz = fpm.kelvinkei(n, z); az = apm.kelvinkei(n, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: 2.7516275915865256214E-1              - 4.9739028524739862760E-1j
mpm: 2.7516275915865256214e-1              - 4.9739028524739862760e-1j
gmp: 2.7516275915865256214E-01             - 4.9739028524739862760E-01j
fpm: 2.75162759158653E-01                  - 4.97390285247399E-01j
apm: 2.7516275915865859000e-1 (2.965e-11%) - 4.9739028524740313000e-1 (-2.154e-11%)j
```

10.8.5 First derivative of the Kelvin function $\mathrm{ber}(\nu, x)$, $\mathrm{ber}'(\nu, x)$

`ctx.kelvin_ber_prime`(*nu*, *z*, *scaled=False*)

Returns $\mathrm{ber}'(\nu, x)$, the first derivative (with respect to x) of the Kelvin function $\mathrm{ber}(\nu, x)$.

If *scaled* is *True*, then $\mathrm{ber}(\nu, x) \cdot \exp(-|x|/\sqrt{2})$ is returned.

See also Wikipedia [1374], MathWorld [1017], NIST [442], Mpmath [704].

Here ν and x are, in general, complex numbers. However, if `ctx` is `math53`, then $\nu \in \mathbb{R}$ and $x \in \mathbb{R}$ is exspected. If `ctx` is `cmath53`, then $\nu \in \mathbb{R}$ and $x \in \mathbb{C}$ is exspected. If `ctx` is `ctxflint` then $n, x \in \mathbb{C}$ is accepted.

The function is calculated as

$$\mathrm{ber}'(\nu, x) = \frac{a_1 J'_\nu(x \cdot a_1) + a_2 J'_\nu(x \cdot a_2)}{2},$$

where $a = \frac{1}{2}\sqrt{2}$, $a_1 = -a + ia$, $a_2 = -a - ia$, and $J'_\nu(x)$ is the first derivative (with respect to x) of the Bessel function $J_\nu(x)$.

The Kelvin functions are all real valued for real x and positive ν.

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; n = 0; x = 3
>>> \mathrm{d}x = dec.kelvinber(n, x); mx = mpm.kelvinber(n, x); gx = gmp.kelvinber(n, x)
>>> fx = fpm.kelvinber(n, x); ax = apm.kelvinber(n, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax],  aligned=True)
dec: -2.213802495986938888682464345899509922321E-1
mpm: -2.213802495986938888682464345899509922321e-1
gmp: -2.213802495986938888682464345899509922321E-01
fpm: -2.21380249598694E-01
apm: -2.213802495986938888682464345899509922332e-1 (-1.283e-37%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; z = '3 + 4j'
>>> \mathrm{d}z = dec.kelvinber(n, z); mz = mpm.kelvinber(n, z); gz = gmp.kelvinber(n, z)
>>> fz = fpm.kelvinber(n, z); az = apm.kelvinber(n, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: 1.033616210179297429 4E+1              + 7.766768913222125917 1E+0j
mpm: 1.033616210179297429 4e+1              + 7.766768913222125917 1e+0j
gmp: 1.033616210179297429 4E+01             + 7.766768913222125917 1E+00j
fpm: 1.03361621017930E+01                   + 7.76676891322213E+00j
apm: 1.033616210179297429 4e+1 (2.032e-18%) + 7.766768913222125917 1e+0 (2.225e-18%)j
```

10.8.6 First derivative of the Kelvin function $\mathrm{bei}(\nu, x)$, $\mathrm{bei}'(\nu, x)$

`ctx.kelvin_bei_prime(`*nu*, *z*, *scaled=False*`)`

Returns $\mathrm{bei}'(\nu, x)$, the first derivative (with respect to x) of the Kelvin function $\mathrm{bei}(\nu, x)$.

If *scaled* is *True*, then $\mathrm{bei}(\nu, x) \cdot \exp(-|x|/\sqrt{2})$ is returned.

See also Wikipedia [1374], MathWorld [1017], NIST [442], Mpmath [704].

Here ν and x are, in general, complex numbers. However, if `ctx` is `math53`, then $\nu \in \mathbb{R}$ and $x \in \mathbb{R}$ is exspected. If `ctx` is `cmath53`, then $\nu \in \mathbb{R}$ and $x \in \mathbb{C}$ is exspected. If `ctx` is `ctxflint` then $n, x \in \mathbb{C}$ is accepted.

The function is calculated as

$$\mathrm{bei}'(\nu, x) = \frac{a_1 J'_\nu(x \cdot a_1) - a_2 J'_\nu(x \cdot a_2)}{2i},$$

where $a = \frac{1}{2}\sqrt{2}$, $a_1 = -a + ia$, $a_2 = -a - ia$, and $J'_\nu(x)$ is the first derivative (with respect to x) of the Bessel function $J_\nu(x)$.

The Kelvin functions are all real valued for real x and positive ν.

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; n = 0; x = 3
>>> \mathrm{d}x = dec.kelvinbei(n, x); mx = mpm.kelvinbei(n, x); gx = gmp.kelvinbei(n, x)
>>> fx = fpm.kelvinbei(n, x); ax = apm.kelvinbei(n, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax],  aligned=True)
dec: 1.937586785266042766896808122272260201255E+0
mpm: 1.937586785266042766896808122272260201255e+0
gmp: 1.937586785266042766896808122272260201255E+00
fpm: 1.93758678526604E+00
apm: 1.937586785266042766896808122272260201256e+0 (1.54e-38%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; z = '3 + 4j'
>>> \mathrm{d}z = dec.kelvinbei(n, z); mz = mpm.kelvinbei(n, z); gz = gmp.kelvinbei(n, z)
>>> fz = fpm.kelvinbei(n, z); az = apm.kelvinbei(n, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: -7.5192613426702233947E+0               + 1.0562898806171521533E+1j
mpm: -7.5192613426702233947e+0               + 1.0562898806171521533e+1j
gmp: -7.5192613426702233947E+00              + 1.0562898806171521533E+01j
fpm: -7.51926134267022E+00                   + 1.05628988061715E+01j
apm: -7.5192613426702233946e+0 (-2.298e-18%) + 1.0562898806171521533e+1 (1.989e-18%)j
```

10.8.7 First derivative of the Kelvin function $\ker(\nu, x)$, $\ker'(\nu, x)$

`ctx.kelvin_ker_prime`(*nu*, *z*, *scaled=False*)

Returns $\ker'(\nu, x)$, the first derivative (with respect to x) of the Kelvin function $\ker(\nu, x)$.

If *scaled* is *True*, then $\mathrm{ber}(\nu, x) \cdot \exp(|x|/\sqrt{2})$ is returned.

See also Wikipedia [1376], MathWorld [1019], NIST [442], Mpmath [706].

Here ν and x are, in general, complex numbers. However, if `ctx` is `math53`, then $\nu \in \mathbb{R}$ and $x \in \mathbb{R}$ is exspected. If `ctx` is `cmath53`, then $\nu \in \mathbb{R}$ and $x \in \mathbb{C}$ is exspected. If `ctx` is `ctxflint` then $n, x \in \mathbb{C}$ is accepted.

The function is calculated as

$$\ker'(\nu, x) = \frac{e^{-\nu\pi i/2} a_1 K'_\nu(x \cdot a_1) + e^{\nu\pi i/2} a_2 K'_\nu(x \cdot a_2)}{2},$$

where $a = \frac{1}{2}\sqrt{2}$, $a_1 = -a + ia$, $a_2 = -a - ia$, and $K'_\nu(x)$ is the first derivative (with respect to x) of the Bessel function $K_\nu(x)$.

The Kelvin functions are all real valued for real x and positive ν.

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; n = 0; x = 3
>>> \mathrm{d}x = dec.kelvinker(n, x); mx = mpm.kelvinker(n, x); gx = gmp.kelvinker(n, x)
>>> fx = fpm.kelvinker(n, x); ax = apm.kelvinker(n, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax],  aligned=True)
dec: -6.702923330379869775199782194748322134382E-2
mpm: -6.702923330379869775199782194748322134382e-2
gmp: -6.702923330379869775199782194748322134382E-02
fpm: -6.70292333037987E-02
apm: -6.702923330379869775199782194748322134370e-2 (-8.669e-36%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; z = '3 + 4j'
>>> \mathrm{d}z = dec.kelvinker(n, z); mz = mpm.kelvinker(n, z); gz = gmp.kelvinker(n, z)
>>> fz = fpm.kelvinker(n, z); az = apm.kelvinker(n, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: 5.0016351579287135729E-1              + 2.7244626208949455251E-1j
mpm: 5.0016351579287135729e-1              + 2.7244626208949455251e-1j
gmp: 5.0016351579287135729E-01             + 2.7244626208949455251E-01j
fpm: 5.00163515792871E-01                  + 2.72446262089495E-01j
apm: 5.0016351579287135710e-1 (2.917e-15%) + 2.7244626208949455183e-1 (4.106e-15%)j
```

10.8.8 First derivative of the Kelvin function $\mathrm{kei}(\nu, x)$, $\mathrm{kei}'(\nu, x)$

`ctx.kelvin_kei_prime`(*nu*, *z*, *scaled=False*)

Returns $\mathrm{kei}'(\nu, x)$, the first derivative (with respect to x) of the Kelvin function $\mathrm{kei}(\nu, x)$.

If *scaled* is *True*, then $\mathrm{kei}(\nu, x) \cdot \exp(|x|/\sqrt{2})$ is returned.

See also Wikipedia [1375], MathWorld [1018], NIST [442], Mpmath [705].

Here ν and x are, in general, complex numbers. However, if `ctx` is `math53`, then $\nu \in \mathbb{R}$ and $x \in \mathbb{R}$ is exspected. If `ctx` is `cmath53`, then $\nu \in \mathbb{R}$ and $x \in \mathbb{C}$ is exspected. If `ctx` is `ctxflint` then $n, x \in \mathbb{C}$ is accepted.

The function is calculated as

$$\ker'(\nu, x) = \frac{e^{-\nu\pi i/2} a_1 K'_\nu(x \cdot a_1) - e^{\nu\pi i/2} a_2 K'_\nu(x \cdot a_2)}{2i},$$

where $a = \frac{1}{2}\sqrt{2}$, $a_1 = -a + ia$, $a_2 = -a - ia$, and $K'_\nu(x)$ is the first derivative (with respect to x) of the Bessel function $K_\nu(x)$.

The Kelvin functions are all real valued for real x and positive ν.

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; n = 0; x = 3
>>> \mathrm{d}x = dec.kelvinkei(n, x); mx = mpm.kelvinkei(n, x); gx = gmp.kelvinkei(n, x)
>>> fx = fpm.kelvinkei(n, x); ax = apm.kelvinkei(n, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax],  aligned=True)
dec: -5.112188404598678140246687753930501705762E-2
mpm: -5.112188404598678140246687753930501705762e-2
gmp: -5.112188404598678140246687753930501705762E-02
fpm: -5.11218840459868E-02
apm: -5.112188404598678140246687753930501705753e-2 (-9.353e-36%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; z = '3 + 4j'
>>> \mathrm{d}z = dec.kelvinkei(n, z); mz = mpm.kelvinkei(n, z); gz = gmp.kelvinkei(n, z)
>>> fz = fpm.kelvinkei(n, z); az = apm.kelvinkei(n, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: 2.7516275915865256214E-1              - 4.9739028524739862760E-1j
mpm: 2.7516275915865256214e-1              - 4.9739028524739862760e-1j
gmp: 2.7516275915865256214E-01             - 4.9739028524739862760E-01j
fpm: 2.75162759158653E-01                  - 4.97390285247399E-01j
apm: 2.7516275915865859000e-1 (2.965e-11%) - 4.9739028524740313000e-1 (-2.154e-11%)j
```

CHAPTER

ELEVEN

HYPERGEOMETRIC FUNCTION ${}_1F_1$ AND RELATED

Text explaining this chapter

The source code for the C# tests in Visual Studio is divided by real and complex modules:

The source code for the C# tests in Visual Studio using real modules can be found online in the `XlCalcNet` repository or in the corresponding local `XlCalcNet` folder in the file B11a_RealHypergeometric_1F1.cs,

The source code for the C# tests in Visual Studio using complex modules can be found online in the `XlCalcNet` repository or in the corresponding local `XlCalcNet` folder in the file B11b_CplxHypergeometric_1F1.cs,

11.1 Hypergeometric Functions ${}_1F_1$ (Kummer) and U (Tricomi)

11.1.1 Kummer's Confluent Hypergeometric Function ${}_1F_1(a, b; x)$

`ctx.hyperg_1f1`(a, b, x)

Returns ${}_1F_1(a, b; x)$, the confluent hypergeometric function of the first kind, where $b \neq 0, -1, -2, \ldots$.

See also Wikipedia [1250], MathWorld [895], NIST [193], BoostMath [103], Ehrhardt [295] (3.8.3), Abramowitz and Stegun. [2], Flint [753], Flint [746], Mpmath [589].

Here a, b and x are, in general, complex numbers. However, if `ctx` is `math53`, then $a, b \in \mathbb{R}$ and $x \in \mathbb{R}$ is exspected. If `ctx` is `cmath53`, then $a, b \in \mathbb{R}$ and $x \in \mathbb{C}$ is exspected. If `ctx` is `ctxflint` then $a, b, x \in \mathbb{C}$ is accepted.

The function is defined as ${}_1F_1(a, b; x) = \sum_{k=0}^{\infty} \frac{(a)_k}{(b)_k} \frac{z^k}{k!}$.

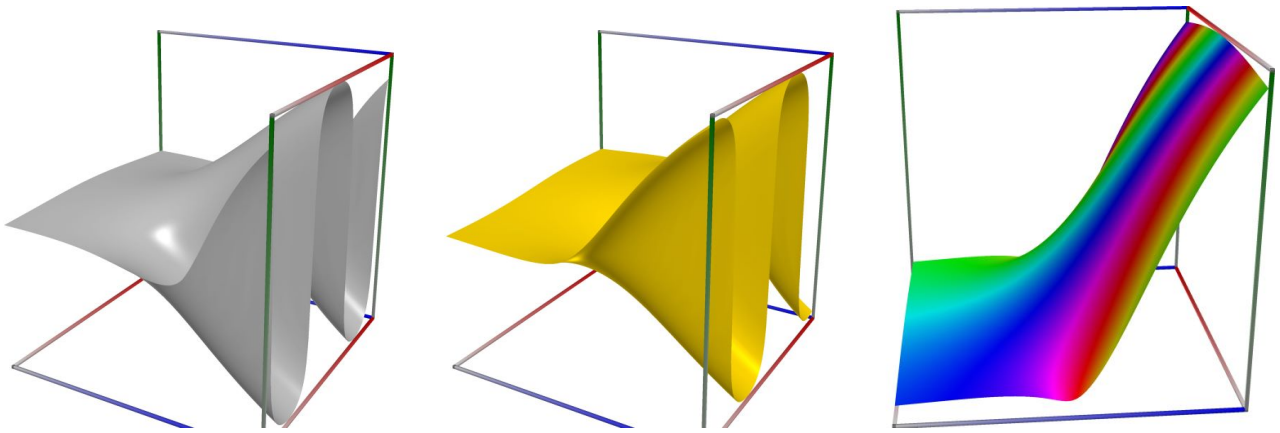

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \leq x \leq 6$ (blue axis), $-6 \leq y \leq 6$ (red axis), $-10 \leq z \leq 10$ (green axis). Function values are *loglog-transformed*.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.Hyperg1F1(4,5,0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.Hyperg1F1(14,15,0.5)
ereal('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; a = 11.0; b = 12.0; x = 3.0
>>> \mathrm{d}x = dec.hyp1f1(a, b, x); mx = mpm.hyp1f1(a, b, x); gx = gmp.hyp1f1(a, b, x)
>>> fx = fpm.hyp1f1(a, b, x); ax = apm.hyp1f1(a, b, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  1.6016380797644591021426991674784163061 25E+1
mpm:  1.6016380797644591021426991674784163061 25e+1
gmp:  1.6016380797644591021426991674784163061 25E+01
fpm:  1.60163807976446E+01
apm:  1.6016380797644591021426991674784163061 25e+1 (1.147e-39%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; a = '11.0 + 2.0j'; b = '12.0 + 3.0j'; z = '3.0 + 4.0j'
>>> \mathrm{d}z = dec.hyp1f1(a, b, z); mz = mpm.hyp1f1(a, b, z); gz = gmp.hyp1f1(a, b, z)
>>> fz = fpm.hyp1f1(a, b, z); az = apm.hyp1f1(a, b, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az], aligned=True)
dec: -1.7071475892855456616E+1               - 6.5250702392280765696E+0j
mpm: -1.7071475892855456616e+1               - 6.5250702392280765696e+0j
gmp: -1.7071475892855456616E+01              - 6.5250702392280765696E+00j
fpm: -1.70714758928555E+01                   - 6.52507023922808E+00j
apm: -1.7071475892855456616e+1 (-1.588e-19%) - 6.5250702392280765696e+0 (-5.192e-20%)j
```

11.1.2 Regularized Kummer Confluent Hypergeometric Function, ${}_1\widetilde{F}_1(a,b;x)$

`ctx.hyperg_1f1r`(a, b, x)

Returns ${}_1\widetilde{F}_1(a,b;z)$, the regularized Kummer confluent hypergeometric function.

See also Wikipedia [1250], MathWorld [260], NIST [193], BoostMath [103], Ehrhardt [295] (3.8.4), Abramowitz and Stegun. [2], Flint [753], Flint [746], Mpmath [589].

Here a, b and x are, in general, complex numbers. However, if `ctx` is `math53`, then $a, b \in \mathbb{R}$ and $x \in \mathbb{R}$ is exspected. If `ctx` is `cmath53`, then $a, b \in \mathbb{R}$ and $x \in \mathbb{C}$ is exspected. If `ctx` is `ctxflint` then $a, b, x \in \mathbb{C}$ is accepted.

We have ${}_1\widetilde{F}_1(a,b;z) = \dfrac{1}{\Gamma(b)}{}_1F_1(a;b;z) = \mathbf{M}(a,b;x) = \dfrac{1}{\Gamma(b)}M(a;b;z)$, for $b \neq 0, -1, -2, \cdots$.

If $b = 0, -1, -2, \cdots = -n$, the corresponding limit ${}_1\widetilde{F}_1(a,b;x) = \dfrac{(a)_{n+1}}{(n+1)!}x^{n+1}{}_1F_1(a+n+1, n+2; x)$ is calculated.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.Hyperg1F1r(4,5,0.5)
ereal('5.2359877559829887307E-1')
>>> math53.Hyperg1F1r(14,15,0.5)
ereal('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; a = 11.0; b = 12.0; x = 3.0
>>> \mathrm{d}x = dec.hyp1f1r(a, b, x); mx = mpm.hyp1f1r(a, b, x); gx = gmp.hyp1f1r(a, b, x)
>>> fx = fpm.hyp1f1r(a, b, x); ax = apm.hyp1f1r(a, b, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  4.012441076850997830844905321765312615552E-7
mpm:  4.012441076850997830844905321765312615552e-7
gmp:  4.012441076850997830844905321765312615552E-07
fpm:  4.01244107685100E-07
apm:  4.012441076850997830844905321765312615552e-7 (2.728e-39%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; a = '11.0 + 2.0j'; b = '12.0 + 3.0j'; z = '3.0 + 4.0j'
>>> \mathrm{d}z = dec.hyp1f1r(a, b, z); mz = mpm.hyp1f1r(a, b, z); gz = gmp.hyp1f1r(a, b, z)
>>> fz = fpm.hyp1f1r(a, b, z); az = apm.hyp1f1r(a, b, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az], aligned=True)
dec: -5.0984734340262287981E-7               + 4.4090124699188539207E-7j
mpm: -5.0984734340262287981e-7               + 4.4090124699188539207e-7j
gmp: -5.0984734340262287981E-07              + 4.4090124699188539207E-07j
fpm: -5.09847343402623E-07                   + 4.40901246991885E-07j
apm: -5.0984734340262287982e-7 (-7.922e-20%) + 4.4090124699188539207e-7 (9.161e-20%)j
```

11.1.3 Tricomi's Confluent Hypergeometric Function, $U(a,b;x)$

`ctx.hyperg_u`(a, b, x)

Returns Tricomi's confluent hypergeometric function of the second kind, $U(a,b;x)$.

See also Wikipedia [1250], MathWorld [896], NIST [193], Ehrhardt [295] (3.8.5), Flint [753], Flint [746], Mpmath [591].

Here a, b and x are, in general, complex numbers. However, if `ctx` is `math53`, then $a, b \in \mathbb{R}$ and $x \in \mathbb{R}$ is exspected. If `ctx` is `cmath53`, then $a, b \in \mathbb{R}$ and $x \in \mathbb{C}$ is exspected. If `ctx` is `ctxflint` then $a, b, x \in \mathbb{C}$ is accepted.

For all $z \neq 0$ and $b \notin \mathbb{Z}$ (but valid for all b as a limit) we have

$$U(a,b;x) = \frac{\Gamma(1-b)}{\Gamma(1+a-b)} M(a,b;c;z) + \frac{\Gamma(1-b)}{\Gamma(a)} x^{1-b} M(1+a-b, 2-b; x)$$

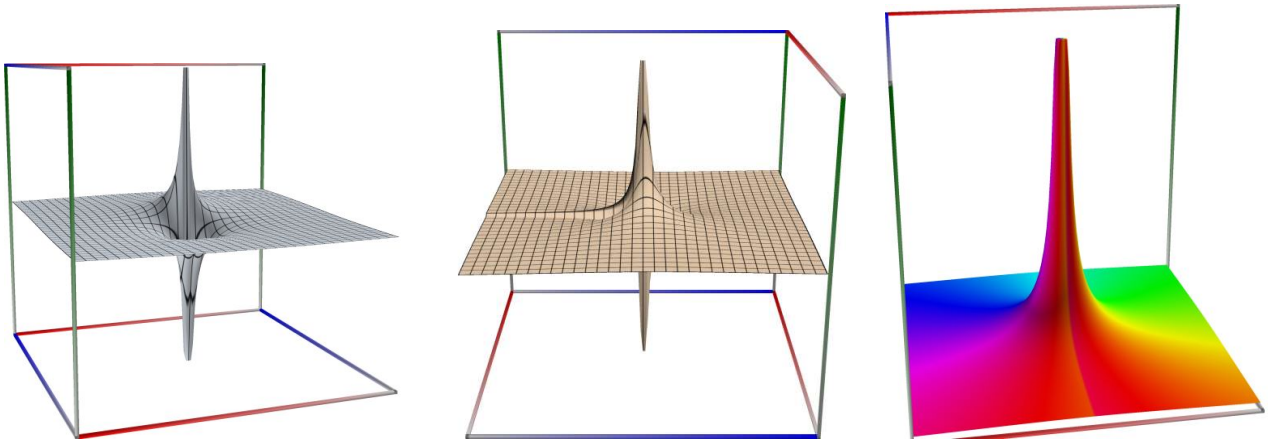

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x+iy)$, with $-6 \leq x \leq 6$ (blue axis), $-6 \leq y \leq 6$ (red axis), $-10 \leq z \leq 10$ (green axis). Function values are *loglog-transformed*.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.HypergU(4,5.1,0.5)
ereal('5.2359877559829887307E-1')
>>> math53.HypergU(14,15.2,0.5)
ereal('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; a = 11.0; b = 12.0; x = 3.0
>>> \mathrm{d}x = dec.hyperu(a, b, x); mx = mpm.hyperu(a, b, x); gx = gmp.hyperu(a, b, x)
>>> fx = fpm.hyperu(a, b, x); ax = apm.hyperu(a, b, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  5.64502926947676223701219890825133928319 4E-6
mpm:  5.64502926947676223701219890825133928319 4e-6
gmp:  5.64502926947676223701219890825133928319 4E-06
fpm:  5.64502926947676E-06
apm:  5.64502926947676223701219890825133928319 4e-6 (7.757e-40%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; a = '11.0 + 2.0j'; b = '12.0 + 3.0j'; z = '3.0 + 4.0j'
>>> \mathrm{d}z = dec.hyperu(a, b, z); mz = mpm.hyperu(a, b, z); gz = gmp.hyperu(a, b, z)
>>> fz = fpm.hyperu(a, b, z); az = apm.hyperu(a, b, z)
```

(continues on next page)

(continued from previous page)

```
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az], aligned=True)
dec: 2.0656756869642262785E-7              + 5.4116585242285070055E-8j
mpm: 2.0656756869642262785e-7              + 5.4116585242285070055e-8j
gmp: 2.0656756869642262785E-07             + 5.4116585242285070055E-08j
fpm: 2.06567568696423E-07                  + 5.41165852422851E-08j
apm: 2.0656756869642262785e-7 (9.776e-20%) + 5.4116585242285070055e-8 (4.665e-20%)j
```

11.1.4 Generalized Laguerre polynomials, $L_n^{(a)}(x)$

`ctx.laguerre_l`(n, a, x)

where `ctx` is `math53` or `ctxflint`.

Note: ctx.laguerre(z, n, alpha)

Returns $L_n^{(a)}(x) = \binom{n+a}{n} M(-n, a+1, x) = \frac{\Gamma(n+a+1)}{\Gamma(n+1)\Gamma(a+1)} {}_1F_1(-n, a+1, x)$, the generalized Laguerre polynomials of degree $n \geq 0$ with parameter $a; x \geq 0$ and $a > -1$ are the standard ranges.

For integer degree $n \geq 0$ and integer order $m \geq 0$, we have, as a special case, the (associated) Laguerre polynomial $L_n^m(x) = L_n^{(m)}(x)$. If $m = 0$, it is just called Laguerre polynomial: $L_n(x) = L_n^0(x) = L_n^{(0)}(x)$

These polynomials are orthogonal on the interval $(0, \infty)$, with respect to the weight function $w(x) = e^{-x}x^a$. The following standard recurrence formulas are used:

$$\begin{aligned} L_0^{(a)}(x) &= 1 \\ L_1^{(a)}(x) &= -x + 1 + a \\ nL_n^{(a)}(x) &= (2n + a - 1 - x)L_{n-1}^{(a)}(x) - (n + a - 1)L_{n-2}^{(a)}(x). \end{aligned} \tag{11.1}$$

See also Wikipedia [1307], MathWorld [923], NIST [395], BoostMath [124], Ehrhardt [295] (3.7.10) and (3.7.12), Flint [755], Flint [751], Mpmath [631].

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.Laguerre(2, 3, 2, 0.5)
ereal('5.2359877559829887307E-1')
>>> math53.Laguerre('6, 2, 0.51')
ereal('5.3518479027559984754E-1')
```

11.1.5 Hermite polynomial (physicist), $H_n(x)$

`ctx.hermite_h`(n, z)

Returns $H_n(z)$, the Hermite polynomial (physicist) of degree n.

See also Wikipedia [1301], MathWorld [920], NIST [395], BoostMath [121], Ehrhardt [295] (3.7.7) and (3.8.11.4), Ehrhardt [295] Flint [755], Flint [751], Mpmath [628].

Here n and x are, in general, complex numbers. However, if `ctx` is `math53`, then $n \in \mathbb{R}$ and $x \in \mathbb{R}$ is exspected. If `ctx` is `cmath53`, then $n \in \mathbb{R}$ and $x \in \mathbb{C}$ is exspected. If `ctx` is `ctxflint` then $n, x \in \mathbb{C}$ is accepted.

We have $H_n(z) = 2^n\sqrt{\pi}\left(\frac{1}{\Gamma\left(\frac{1-n}{2}\right)}\,{}_1F_1\left(-\frac{n}{2}, \frac{1}{2}, z^2\right) - \frac{2z}{\Gamma\left(-\frac{n}{2}\right)}\,{}_1F_1\left(\frac{1-n}{2}, \frac{3}{2}, z^2\right)\right)$, where $\frac{1}{\Gamma(n)}$ is evaluated calling the reciprocal gamma function.

For integer $n \geq 0$, the H_n are orthogonal on the interval $(-\infty, \infty)$, with respect to the weight function $w(x) = e^{-x^2}$. They can be computed with the standard recurrence formulas:

$$\begin{aligned} H_0(x) &= 1 \\ H_1(x) &= 2x \\ H_n(x) &= 2xH_{n-1}(x) - 2(n-1)H_{n-2}(x). \end{aligned} \tag{11.2}$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.HermiteH(2, 0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.HermiteH(6, 0.51)
ereal('5.351847902755998475 4E-1')
```

11.1.6 Hermite polynomials (probabilist) $\mathrm{He}_n(x)$

`ctx.hermite_he(n, x)`

Returns $\mathrm{He}_n(x) = 2^{-n/2} H_n(x/\sqrt{2})$, the probabilist's Hermite polynomial of degree $n \geq 0$.

For integer n, the He_n are orthogonal on the interval $(-\infty, \infty)$, with respect to the weight function $w(x) = \exp(-x^2/2)$. They are computed with the standard recurrence formulas:

$$\begin{aligned} \mathrm{He}_0(x) &= 1 \\ \mathrm{He}_1(x) &= x \\ \mathrm{He}_n(x) &= x\,\mathrm{He}_{n-1}(x) - (n-1)\,\mathrm{He}_{n-2}(x). \end{aligned} \tag{11.3}$$

See also Wikipedia [1301], MathWorld [920], NIST [395], BoostMath [121], Ehrhardt [295] (3.7.8), Flint [755], Flint [751], Mpmath [628].

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.HermiteHe(2, 0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.HermiteHe(6, 0.51)
ereal('5.351847902755998475 4E-1')
```

11.2 Incomplete gamma functions

11.2.1 Lower normalized incomplete gamma function, $P(a, x)$

`ctx.gamma_p`(a, x)

where `ctx` is `math53`, `ctxboost`, `ctxflint`.

Note: ctx.incGammaP(a, x)

Returns the lower normalized incomplete gamma function $P(a, x) = \frac{1}{\Gamma(a)} \int_0^x t^{a-1} e^{-t}\, \mathrm{d}t$, for $a \geq 0$ and $x \geq 0$.

See also Wikipedia [1218], MathWorld [851], NIST [457], BoostMath [81], Ehrhardt [295] (3.5.2.1), Flint [737], Flint [727], Mpmath [548].

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.IncGammaP(3.1, 1.5)
ereal('5.2359877559829887307E-1')
>>> math53.IncGammaP(3.4, '1.51')
ereal('5.3518479027559984754E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; a= 10; x = 30
>>> \mathrm{d}x = dec.gamma_p(a, x); mx = mpm.gamma_p(a, x); gx = gmp.gamma_p(a, x)
>>> fx = fpm.gamma_p(a, x); ax = apm.gamma_p(a, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  9.999928782491371844229083533391656597094E-1
mpm:  9.999928782491371844229083533391656597094e-1
gmp:  9.999928782491371844229083533391656597094E-01
fpm:  9.99992878249137E-01
apm:  9.999928782491371844229083533391656597094e-1 (5.74e-40%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; a= '10 + 3j'; z = '3 + 2j'
>>> \mathrm{d}z = dec.gamma_p(a, z); mz = mpm.gamma_p(a, z); gz = gmp.gamma_p(a, z)
>>> fz = fpm.gamma_p(a, z); az = apm.gamma_p(a, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: 1.34252104629843434451E-3              + 1.2911646547819672560E-3j
mpm: 1.34252104629843434451e-3              + 1.2911646547819672560e-3j
gmp: 1.342521046298434434451E-03            + 1.2911646547819672560E-03j
fpm: 1.34252104629843E-03                   + 1.29116465478197E-03j
apm: 1.34252104629843434451e-3 (3.697e-19%) + 1.2911646547819672560e-3 (3.203e-19%)j
```

11.2.2 Upper normalized incomplete gamma functions , $Q(a, x)$

`ctx.gamma_q`(a, x)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Note: ctx.incGammaQ(a, x)

Returns the upper normalized incomplete gamma function $Q(a,x) = \dfrac{1}{\Gamma(a)} \displaystyle\int_x^\infty t^{a-1} e^{-t}\, \mathrm{d}t,$ for $a \geq 0$ and $x \geq 0$.

See also Wikipedia [1218], MathWorld [851], NIST [457], BoostMath [81], Ehrhardt [295] (3.5.2.1), Flint [737], Flint [727], Mpmath [548].

If *regularized* is 0, computes the upper incomplete gamma function $\Gamma(s,z)$.

If *regularized* is 1, computes the regularized upper incomplete gamma function $Q(s,z) = \Gamma(s,z)/\Gamma(s)$.

If *regularized* is 2, computes the generalized exponential integral $z^{-s}\Gamma(s,z) = E_{1-s}(z)$.

The different methods respectively implement the formulas

$$\Gamma(s,z) = e^{-z} U(1-s, 1-s, z)$$

$$\Gamma(s,z) = \Gamma(s) - \frac{z^s}{s} {}_1F_1(s, s+1, -z)$$

$$\Gamma(s,z) = \Gamma(s) - \frac{z^s e^{-z}}{s} {}_1F_1(1, s+1, z)$$

$$\Gamma(s,z) = \frac{(-1)^n}{n!}(\psi(n+1) - \log(z)) + \frac{(-1)^n}{(n+1)!} z\, {}_2F_2(1,1,2,2+n,-z) - z^{-n} \sum_{k=0}^{n-1} \frac{(-z)^k}{(k-n)k!}, \quad n = -s \in \mathbb{Z}_{\geq 0}$$

and an automatic algorithm choice. The automatic version also handles other special input such as $z = 0$ and $s = 1, 2, 3$. The *singular* version evaluates the finite sum directly and therefore assumes that s is not too large.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.IncGammaQ(3.1, 1.5)
ereal('5.235987755982988730 7E-1')
>>> math53.IncGammaQ(3.4, '1.51')
ereal('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; a= 10; x = 30
>>> \mathrm{d}x = dec.gamma_q(a, x); mx = mpm.gamma_q(a, x); gx = gmp.gamma_q(a, x)
>>> fx = fpm.gamma_q(a, x); ax = apm.gamma_q(a, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  7.12175086281557709164666083434029059 3535E-6
mpm:  7.12175086281557709164666083434029059 3535e-6
gmp:  7.12175086281557709164666083434029059 3535E-06
fpm:  7.12175086281558E-06
apm:  7.12175086281557709164666083434029059 5390e-6 (4.704e-35%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; a= '10 + 3j'; z = '3 + 2j'
>>> \mathrm{d}z = dec.gamma_q(a, z); mz = mpm.gamma_q(a, z); gz = gmp.gamma_q(a, z)
>>> fz = fpm.gamma_q(a, z); az = apm.gamma_q(a, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: 9.9865747895370156565E-1              - 1.2911646547819672560E-3j
```

(continues on next page)

(continued from previous page)

```
mpm: 9.9865747895370156565e-1              - 1.2911646547819672560e-3j
gmp: 9.9865747895370156565E-01             - 1.2911646547819672560E-03j
fpm: 9.98657478953702E-01                  - 1.29116465478197E-03j
apm: 9.9865747895370156566e-1 (4.241e-20%) - 1.2911646547819672560e-3 (-3.844e-19%)j
```

11.2.3 Lower non-normalized incomplete gamma function, $\gamma(a, x)$

`ctx.gamma_lower`(a, x)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Note: ctx.incgammaL(a, x), ctxboost.TgammaLower(a, x)

Returns the real lower non-normalized incomplete gamma function $\gamma(a, x) = \int_0^x t^{a-1} e^{-t}\,\mathrm{d}t,$ for $a \geq 0$ and $x \geq 0$.

See also Wikipedia [1218], MathWorld [844], NIST [457], BoostMath [81], Ehrhardt [295] (3.5.2.2), Flint [737], Flint [727], Mpmath [548].

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.IncgammaL(3.1, 1.5)
ereal('5.2359877559829887307E-1')
>>> math53.IncgammaL(3.4, '1.51')
ereal('5.3518479027559984754E-1')
```

11.2.4 Upper non-normalized incomplete gamma function, $\Gamma(a, x)$

`ctx.gamma_upper`(a, x)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Note: ctx.incGammaU(a, x)

Returns the real upper non-normalized incomplete gamma function $\Gamma(a,x) = \int_x^\infty t^{a-1}e^{-t}\,\mathrm{d}t,$ for $a \geq 0$ and $x \geq 0$.

See also Wikipedia [1218], MathWorld [844], NIST [457], BoostMath [81], Ehrhardt [295] (3.5.2.2), Flint [737], Flint [727], Mpmath [548].

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.IncGammaU(3.1, 1.5)
ereal('5.235987755982988730 7E-1')
>>> math53.IncGammaU(3.4, '1.51')
ereal('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; a= 10; x = 30
>>> \mathrm{d}x = dec.gamma_upper(a, x); mx = mpm.gamma_upper(a, x); gx = gmp.gamma_upper(a, x)
>>> fx = fpm.gamma_upper(a, x); ax = apm.gamma_upper(a, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  2.584340953098516615016740283565404650582E+0
mpm:  2.584340953098516615016740283565404650582e+0
gmp:  2.584340953098516615016740283565404650582E+00
fpm:  2.58434095309852E+00
apm:  2.584340953098516615016740283565404651198e+0 (4.411e-35%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; a= '10 + 3j'; z = '3 + 2j'
>>> \mathrm{d}z = dec.gamma_upper(a, z); mz = mpm.gamma_upper(a, z); gz = gmp.gamma_upper(a, z)
>>> fz = fpm.gamma_upper(a, z); az = apm.gamma_upper(a, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: 1.9750505254998015902E+5              + 1.1284570922907013455E+5j
mpm: 1.9750505254998015902e+5              + 1.1284570922907013455e+5j
gmp: 1.9750505254998015902E+05             + 1.1284570922907013455E+05j
fpm: 1.97505052549980E+05                  + 1.12845709229070E+05j
apm: 1.9750505254998015902e+5 (5.621e-20%) + 1.1284570922907013455e+5 (9.838e-20%)j
```

11.2.5 Derivative of the incomplete gamma function

`ctx.gamma_p_prime`(a, z)

Returns the partial derivative with respect to x of the incomplete gamma function $P(a, x)$:

The partial derivative with respect to x of the incomplete gamma function $P(a, x)$ is defined as:

$$\frac{\partial}{\partial x} P(a, x) = \frac{e^{-x} x^{a-1}}{\Gamma(a)}.$$

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; a= 10; x = 30
>>> \mathrm{d}x = dec.gamma_derivative(a, x); mx = mpm.gamma_derivative(a, x); gx = gmp.gamma_derivative(a, x)
>>> fx = fpm.gamma_derivative(a, x); ax = apm.gamma_derivative(a, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  5.07567495854500542186282863902O146738895E-6
mpm:  5.07567495854500542186282863902O146738895e-6
gmp:  5.07567495854500542186282863902O146738895E-06
fpm:  5.07567495854500E-06
apm:  5.07567495854500542186282863902O146738895e-6 (8.628e-40%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; a= '10 + 3j'; z = '3 + 2j'
>>> \mathrm{d}z = dec.gamma_derivative(a, z); mz = mpm.gamma_derivative(a, z); gz = gmp.gamma_derivative(a, z)
>>> fz = fpm.gamma_derivative(a, z); az = apm.gamma_derivative(a, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: 3.6415328970281122640E-3              + 1.2712795456433263145E-3j
mpm: 3.6415328970281122640e-3              + 1.2712795456433263145e-3j
gmp: 3.6415328970281122640E-03             + 1.2712795456433263145E-03j
fpm: 3.64153289702811E-03                  + 1.27127954564333E-03j
apm: 3.6415328970281122640e-3 (2.272e-19%) + 1.2712795456433263145e-3 (5.856e-19%)j
```

11.2.6 Inverse of the real lower normalised incomplete gamma function, $P^{-1}(a, q)$

`ctx.gamma_p_inv`(a, q)

where `ctx` is `math53`, `ctxcpp`, `ctxboost` or `ctxflint`.

Note: ctx.incGammaPInv(a, p)

Returns $P^{-1}(a, p)$, the functional inverse of the real lower normalized incomplete gamma function, i.e. the function calculates x with $P(a, x) = p$ where $a > 0$ and $0 < p < 1$.

See also BoostMath [80], Wikipedia [1218], MathWorld [258], NIST [457], Ehrhardt [295] (3.5.2.4).

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; a = '10.4'; prob = '0.7'
>>> \mathrm{d}x = dec.gamma_p_inv(a, prob); mx = mpm.gamma_p_inv(a, prob)
>>> ix = ipm.gamma_p_inv(a, prob); fx = fpm.gamma_p_inv(a, prob)
>>> gx = gmp.gamma_p_inv(a, prob); ax = apm.gamma_p_inv(a, prob)
>>> mpm.show([\mathrm{d}x, mx, ix, fx, gx, ax])
dec:  1.18206531273240015823054804964431258208 3E+1
mpm:  1.18206531273240015823054804964431258208 3e+1
ipm:  1.18206531273240015823054804964431258208 3e+1 (7.769e-40%)
fpm:  1.18206531273240E+01
gmp:  1.18206531273240015823054804964431258208 3E+01
apm:  1.18206531273240015823054804964431258208 3e+1 (7.769e-40%)
```

11.2.7 Inverse of the real upper normalised incomplete gamma function, $Q^{-1}(a, q)$

`ctx.gamma_q_inv`(a, q)

where `ctx` is `math53`, `ctxcpp`, `ctxboost` or `ctxflint`.

Note: ctx.incGammaQInv(a, q)

Returns $Q^{-1}(a, q)$, the functional inverse of the real upper normalized incomplete gamma function, i.e. the function calculates x with $Q(a, x) = q$ where $a > 0$ and $0 < q < 1$.

See also BoostMath [80], Wikipedia [1218], MathWorld [258], NIST [457], Ehrhardt [295] (3.5.2.4).

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; a = '10.4'; prob = '0.7'
>>> \mathrm{d}x = dec.gamma_q_inv(a, prob); mx = mpm.gamma_q_inv(a, prob)
>>> ix = ipm.gamma_q_inv(a, prob); fx = fpm.gamma_q_inv(a, prob)
>>> gx = gmp.gamma_q_inv(a, prob); ax = apm.gamma_q_inv(a, prob)
>>> mpm.show([\mathrm{d}x, mx, ix, fx, gx, ax])
dec:  8.4994072827546379443001464562670863769 57E+0
mpm:  8.4994072827546379443001464562670863769 57e+0
ipm:  8.4994072827546379443001464562670863769 57e+0 (1.08e-39%)
fpm:  8.49940728275464E+00
gmp:  8.4994072827546379443001464562670863769 57E+00
apm:  8.4994072827546379443001464562670863769 57e+0 (1.08e-39%)
```

11.2.8 Inverse (on parameter a) of the real lower normalised incomplete gamma function

`ctx.gamma_p_inva`(x, q)

where `ctx` is `math53`, `ctxcpp`, `ctxboost` or `ctxflint`.

Note: ctx.incGammaPInva(x, p)

Returns the functional inverse (on parameter a) of the lower normalized incomplete gamma function $P(a, x)$, i.e. the function calculates a with $P(a, x) = p$ where $x > 0$ and $0 < p < 1$.

See also BoostMath [80], Wikipedia [1218], NIST [457]

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; x = '10.4'; prob = '0.7'
>>> \mathrm{d}x = dec.gamma_p_inva(x, prob); mx = mpm.gamma_p_inva(x, prob)
>>> ix = ipm.gamma_p_inva(x, prob); fx = fpm.gamma_p_inva(x, prob)
>>> gx = gmp.gamma_p_inva(x, prob); ax = apm.gamma_p_inva(x, prob)
>>> mpm.show([\mathrm{d}x, mx, ix, fx, gx, ax])
dec:  9.0912237806574900243957402146331986854 11E+0
mpm:  9.0912237806574900243957402146331986854 11e+0
ipm:  9.0912237806574900243957402146331986854 11e+0 (1.01e-39%)
fpm:  9.09122378065749E+00
gmp:  9.0912237806574900243957402146331986854 11E+00
apm:  9.0912237806574900243957402146331986854 11e+0 (1.01e-39%)
```

11.2.9 Inverse (on parameter a) of the real upper normalised incomplete gamma function

`ctx.gamma_q_inva`(x, q)

where `ctx` is `math53`, `ctxcpp`, `ctxboost` or `ctxflint`.

Note: ctx.incGammaQInva(x, p)

Returns the functional inverse (on parameter a) of the upper normalized incomplete gamma function $Q(a, x)$, i.e. the function calculates a with $Q(a, x) = q$ where $x > 0$ and $0 < q < 1$.

See also BoostMath [80], Wikipedia [1218], NIST [457]

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; x = '10.4'; prob = '0.7'
>>> \mathrm{d}x = dec.gamma_q_inva(x, prob); mx = mpm.gamma_q_inva(x, prob)
>>> ix = ipm.gamma_q_inva(x, prob); fx = fpm.gamma_q_inva(x, prob)
>>> gx = gmp.gamma_q_inva(x, prob); ax = apm.gamma_q_inva(x, prob)
>>> mpm.show([\mathrm{d}x, mx, ix, fx, gx, ax])
dec:  1.2463747582846862236028997886519722948 25E+1
mpm:  1.2463747582846862236028997886519722948 25e+1
ipm:  1.2463747582846862236028997886519722948 25e+1 (7.368e-40%)
fpm:  1.24637475828469E+01
gmp:  1.2463747582846862016481281898450106382 37E+01
apm:  1.2463747582846862236028997886519722948 25e+1 (7.368e-40%)
```

11.3 Coulomb, Whittaker and parabolic cylinder function

11.3.1 Regular Coulomb wave function $F_\ell(\eta, x)$

`ctx.coulomb_f`(*l*, *eta*, *x*)

where `ctx` is `math53`` or `ctxflint`.

Returns the Coulomb wave function F. See also Wikipedia [1361], MathWorld [1024], NIST [778], Ehrhardt [295] (3.1.10.4), Mpmath [710].

Calculates the regular Coulomb wave function

$$F_\ell(\eta, x) = \frac{1}{2i}\left(H_\ell^{(+)}(\eta, x) - H_\ell^{(-)}(\eta, x)\right),$$

where $H_\ell^{(+)}(\eta, x)$ and $H_\ell^{(-)}(\eta, x)$ are irregular Coulomb wave functions.

Coulomb wave functions are solutions of the Coulomb wave equation

$$y'' + \left(1 - \frac{2\eta}{z} - \frac{\ell(\ell+1)}{z^2}\right) y = 0$$

which is the radial Schrödinger equation for a charged particle in a Coulomb potential $1/z$, where ℓ is the orbital angular momentum and η is the Sommerfeld parameter. The standard solutions are named $F_\ell(\eta, z)$ (regular at the origin $z = 0$) and $G_\ell(\eta, z)$ (irregular at the origin). The irregular solutions $H_\ell^{\pm}(\eta, z) = G_\ell(\eta, z) \pm iF_\ell(\eta, z)$ are also used. The redundant functions $H^{\pm}$ are provided explicitly since taking the linear combination of F and G suffers from cancellation in parts of the complex plane.

Coulomb wave functions are special cases of confluent hypergeometric functions. The normalization constants and connection formulas are discussed in Dzieciol *et al.* [294], Gaspard [340], Michel [412] and chapter 33 in NIST [778]. In this implementation, we define the analytic continuations of all the functions so that the branch cut with respect to z is placed on the negative real axis.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.CoulombF(3, 0.5, 2.25)
ereal('5.235987755982988730 7E-1')
>>> math53.CoulombF(3, 0.5, 8.25)
ereal('5.351847902755998475 4E-1')
```

11.3.2 Irregular Coulomb wave function $G_\ell(\eta, z)$

`ctx.coulomb_g`(*L*, *eta*, *x*)

where `ctx` is `math53`` or `ctxflint`.

Returns the irregular Coulomb wave function. See also Wikipedia [1361], MathWorld [1024], NIST [778], Ehrhardt [295] (3.1.10.5), Mpmath [711].

Calculates the irregular Coulomb wave function

$$G_\ell(\eta, x) = \frac{1}{2}\left(H_\ell^{(+)}(\eta, x) - H_\ell^{(-)}(\eta, x)\right),$$

where $H_\ell^{(+)}(\eta, x)$ and $H_\ell^{(-)}(\eta, x)$ are irregular Coulomb wave functions.

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; l = '10'; eta = '3.0'; x = '5.0'
>>> \mathrm{d}x = dec.coulombg(l, eta, x); mx = mpm.coulombg(l, eta, x); gx = gmp.coulombg(l, eta, x)
>>> fx = fpm.coulombg(l, eta, x); ax = apm.coulombg(l, eta, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  4.961542114057365010741557537693681681810E+3
mpm:  4.961542114057365010741557537693681681810e+3
gmp:  4.961542114057365010741557537693681681810E+03
fpm:  4.96154211405737E+03
apm:  4.961542114057365010741557537693681681810e+3 (3.791e-39%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; l = '10'; eta = '3 + 4j'; z = '5.0 + 3j'
>>> \mathrm{d}z = dec.coulombg(l, eta, z); mz = mpm.coulombg(l, eta, z); gz = gmp.coulombg(l, eta, z)
>>> fz = fpm.coulombg(l, eta, z); az = apm.coulombg(l, eta, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: 1.2323201237533547519E+3              - 1.026967516056281371 5E+2j
mpm: 1.23232012375335475 19e+3             - 1.026967516056281371 5e+2j
gmp: 1.2323201237533547519E+03             - 1.026967516056281371 5E+02j
fpm: 1.23232012375335E+03                  - 1.02696751605628E+02j
apm: 1.2323201237533547519e+3 (4.223e-19%) - 1.026967516056281371 5e+2 (-3.537e-18%)j
```

11.3.3 Irregular Coulomb wave function $H_\ell^{(+)}(\eta, x)$

`ctx.coulomb_hplus`(*L*, *eta*, *x*)

where `ctx` is `math53`` or `ctxflint`.

Returns the irregular Coulomb wave function. See also Wikipedia [1361], MathWorld [1024], NIST [778], Ehrhardt [295] (3.1.10.5), Mpmath [711].

Calculates the irregular Coulomb wave function

$$H_\ell^{(+)}(\eta, x) = -2i(-2)^\ell e^{\pi\eta/2} e^{+i\sigma_\ell} x^{\ell+1} e^{+ix} U(\ell + 1 + i\eta, 2l + 2, -2ix),$$

where $\sigma_\ell = \arg\Gamma(\ell + 1 + i\eta)$ is called the Coulomb phase shift.

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; l = '10'; eta = '3.0'; x = '5.0'
>>> \mathrm{d}x = dec.coulombg(l, eta, x); mx = mpm.coulombg(l, eta, x); gx = gmp.coulombg(l, eta, x)
>>> fx = fpm.coulombg(l, eta, x); ax = apm.coulombg(l, eta, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  4.961542114057365010741557537693681681810E+3
mpm:  4.961542114057365010741557537693681681810e+3
gmp:  4.961542114057365010741557537693681681810E+03
fpm:  4.96154211405737E+03
apm:  4.961542114057365010741557537693681681810e+3 (3.791e-39%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; l = '10'; eta = '3 + 4j'; z = '5.0 + 3j'
>>> \mathrm{d}z = dec.coulombg(l, eta, z); mz = mpm.coulombg(l, eta, z); gz = gmp.coulombg(l, eta, z)
>>> fz = fpm.coulombg(l, eta, z); az = apm.coulombg(l, eta, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: 1.2323201237533547519E+3              - 1.026967516056281371 5E+2j
mpm: 1.2323201237533547519e+3              - 1.026967516056281371 5e+2j
gmp: 1.2323201237533547519E+03             - 1.026967516056281371 5E+02j
fpm: 1.23232012375335E+03                  - 1.02696751605628E+02j
apm: 1.2323201237533547519e+3 (4.223e-19%) - 1.026967516056281371 5e+2 (-3.537e-18%)j
```

11.3.4 Irregular Coulomb wave function $H_\ell^{(-)}(\eta, x)$

`ctx.coulomb_hminus`(*L*, *eta*, *x*)

where `ctx` is `math53`` or `ctxflint`.

Returns the irregular Coulomb wave function. See also Wikipedia [1361], MathWorld [1024], NIST [778], Ehrhardt [295] (3.1.10.5), Mpmath [711].

Calculates the irregular Coulomb wave function

$$H_\ell^{(-)}(\eta, x) = +2i(-2)^\ell e^{\pi\eta/2} e^{+i\sigma_\ell} x^{\ell+1} e^{+ix} U(\ell + 1 + i\eta, 2l + 2, -2ix),$$

where $\sigma_\ell = \arg\Gamma(\ell + 1 + i\eta)$ is called the Coulomb phase shift.

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; l = '10'; eta = '3.0'; x = '5.0'
>>> \mathrm{d}x = dec.coulombg(l, eta, x); mx = mpm.coulombg(l, eta, x); gx = gmp.coulombg(l, eta, x)
>>> fx = fpm.coulombg(l, eta, x); ax = apm.coulombg(l, eta, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  4.961542114057365010741557537693681681810E+3
mpm:  4.961542114057365010741557537693681681810e+3
gmp:  4.961542114057365010741557537693681681810E+03
fpm:  4.96154211405737E+03
apm:  4.961542114057365010741557537693681681810e+3 (3.791e-39%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; l = '10'; eta = '3 + 4j'; z = '5.0 + 3j'
>>> \mathrm{d}z = dec.coulombg(l, eta, z); mz = mpm.coulombg(l, eta, z); gz = gmp.coulombg(l, eta, z)
>>> fz = fpm.coulombg(l, eta, z); az = apm.coulombg(l, eta, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: 1.2323201237533547519E+3              - 1.026967516056281371 5E+2j
mpm: 1.2323201237533547519e+3              - 1.026967516056281371 5e+2j
gmp: 1.2323201237533547519E+03             - 1.026967516056281371 5E+02j
fpm: 1.23232012375335E+03                  - 1.02696751605628E+02j
apm: 1.2323201237533547519e+3 (4.223e-19%) - 1.026967516056281371 5e+2 (-3.537e-18%)j
```

11.3.5 Whittaker function $M_{\kappa,\mu}(x)$

`ctx.whittaker_m(k, m, x)`

Returns $M_{\kappa,\mu}(x) = e^{-\frac{1}{2}x} x^{\frac{1}{2}+\mu} M(\frac{1}{2}+\mu-\kappa, 1+2\mu, x)$, the Whittaker function M.

See also MathWorld [1033], Wikipedia [1388], Ehrhardt [295] (3.8.9), NIST [191], Mpmath [720].

$$M(k,m,z) = e^{-\frac{1}{2}z} z^{\frac{1}{2}+m} \, {}_1F_1(\tfrac{1}{2}+m-k, 1+2m, z)$$

Evaluates the Whittaker function $M(k,m,z)$, which gives a solution to the Whittaker differential equation

$$\frac{d^2f}{\mathrm{d}z^2} + \left(-\frac{1}{4} + \frac{k}{z} + \frac{(\frac{1}{4}-m^2)}{z^2}\right) f = 0.$$

A second solution is given by *whitw()*.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.WhittakerM(5.1,0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.WhittakerM(15.2,0.5)
ereal('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; k = '10'; m = '3.0'; x = '5.0'
>>> \mathrm{d}x = dec.whitm(k, m, x); mx = mpm.whitm(k, m, x); gx = gmp.whitm(k, m, x)
>>> fx = fpm.whitm(k, m, x); ax = apm.whitm(k, m, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  5.037724223377349504794983027900485241922E-2
mpm:  5.037724223377349504794983027900485241922e-2
mpm:  5.037724223377349504794983027900485241922e-2
fpm:  5.03772422337738E-02
apm:  5.037724223377349504794983027900485241947e-2 (1.976e-36%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; k = '10'; m = '3 + 4j'; z = '5.0 + 3j'
>>> \mathrm{d}z = dec.whitm(k, m, z); mz = mpm.whitm(k, m, z); gz = gmp.whitm(k, m, z)
>>> fz = fpm.whitm(k, m, z); az = apm.whitm(k, m, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: 4.9746800935982291618E-1              - 5.5703088408623297578E-1j
mpm: 4.9746800935982291618e-1              - 5.5703088408623297578e-1j
mpm: 4.9746800935982291618e-1              - 5.5703088408623297578e-1j
fpm: 4.97468009359823E-01                  - 5.57030884086233E-01j
apm: 4.9746800935982291618e-1 (8.939e-19%) - 5.5703088408623297578e-1 (-6.082e-19%)j
```

11.3.6 Whittaker function $W_{\kappa,\mu}(x)$

`ctx.whittaker_w(`k, m, x`)`

Returns $W_{\kappa,\mu}(x) = e^{-\frac{1}{2}x} x^{\frac{1}{2}+\mu} U(\frac{1}{2}+\mu-\kappa, 1+2\mu, x)$, the Whittaker function W.

See also MathWorld [1034], Wikipedia [1388], Ehrhardt [295] (3.8.10), NIST [191], Mpmath [721].

$$W(k,m,z) = e^{-\frac{1}{2}z} z^{\frac{1}{2}+m} U(\tfrac{1}{2}+m-k, 1+2m, z).$$

Evaluates the Whittaker function $W(k,m,z)$, which gives a second solution to the Whittaker differential equation.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.WhittakerW(5.1,0.5)
ereal('5.2359877559829887307E-1')
>>> math53.WhittakerW(15.2,0.5)
ereal('5.3518479027559984754E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; k = '10'; m = '3.0'; x = '5.0'
>>> \mathrm{d}x = dec.whitw(k, m, x); mx = mpm.whitw(k, m, x); gx = gmp.whitw(k, m, x)
>>> fx = fpm.whitw(k, m, x); ax = apm.whitw(k, m, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  -9.206869244108589870287530029194217374270E+5
mpm:  -9.206869244108589870287530029194217374270e+5
mpm:  -9.206869244108589870287530029194217374270e+5
fpm:  -9.20686924410859E+05
apm:  -9.206869244108589870287530029194217374270e+5 (-7.191e-39%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; k = '10'; m = '3 + 4j'; z = '5.0 + 3j'
>>> \mathrm{d}z = dec.whitw(k, m, z); mz = mpm.whitw(k, m, z); gz = gmp.whitw(k, m, z)
>>> fz = fpm.whitw(k, m, z); az = apm.whitw(k, m, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: 7.5723638666590182121E+7              - 1.6673471905439061612E+8j
mpm: 7.5723638666590182121e+7              - 1.6673471905439061612e+8j
mpm: 7.5723638666590182121e+7              - 1.6673471905439061612e+8j
fpm: 7.57236386665902E+07                  - 1.66734719054391E+08j
apm: 7.5723638666590182120e+7 (6.756e-19%) - 1.6673471905439061612e+8 (-4.091e-19%)j
```

11.3.7 Parabolic cylinder function $D_\nu(x)$

`ctx.cylinder_d(nu, x)`

Returns Whittaker's parabolic cylinder function $D_n(z) = U(-n - 1/2, z)$ (see *pcfu()*).

See also: MathWorld [283], Wikipedia [1381], NIST [776], Mpmath [714], Ehrhardt [295] (3.8.11.1).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.CylinderD(5.1,0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.CylinderD(15.2,0.5)
ereal('5.351847902755998475 4E-1')
>>> math53.CylinderD(15.2,0.5)
ereal('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; n = '10.1'; x = '5.0'
>>> \mathrm{d}x = dec.pcfd(n, x); mx = mpm.pcfd(n, x); gx = gmp.pcfd(n, x)
>>> fx = fpm.pcfd(n, x); ax = apm.pcfd(n, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  2.9896375768626179568207551164298692593 51E+2
mpm:  2.9896375768626179568207551164298692593 51e+2
mpm:  2.9896375768626179568207551164298692593 52e+2
fpm:  2.98963757686262E+02
apm:  2.9896375768626179568207551164298692593 52e+2 (1.914e-36%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; n = '10.1'; z = '5.0 + 3j'
>>> \mathrm{d}z = dec.pcfd(n, z); mz = mpm.pcfd(n, z); gz = gmp.pcfd(n, z)
>>> fz = fpm.pcfd(n, z); az = apm.pcfd(n, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: 5.7176371555791286919E+5              - 4.3671006346521104926E+5j
mpm: 5.7176371555791286919e+5              - 4.3671006346521104926e+5j
mpm: 5.7176371555791286919e+5              - 4.3671006346521104926e+5j
fpm: 5.71763715557912E+05                  - 4.36710063465211E+05j
apm: 5.7176371555791286919e+5 (1.577e-17%) - 4.3671006346521104926e+5 (-1.825e-17%)j
```

11.3.8 Parabolic cylinder function $U(a,x)$

ctx.cylinder_u(a,x)

Returns the parabolic cylinder function $U(a,x)$.

See also: MathWorld [1030], Wikipedia [1381], Ehrhardt [295] (3.8.11.2), NIST [776], Mpmath [715].

The function is defined, for arbitrary z, as

$$U\left(a,z\right)=U\left(a,0\right)u_1(a,z)+U'\left(a,0\right)u_2(a,z),$$

$$u_1(a,z)=e^{-\frac{1}{4}z^2}\,{}_1F_1\left(\tfrac{1}{2}a+\tfrac{1}{4},\tfrac{1}{2},\tfrac{1}{2}z^2\right)=e^{\frac{1}{4}z^2}\,{}_1F_1\left(-\tfrac{1}{2}a+\tfrac{1}{4},\tfrac{1}{2},-\tfrac{1}{2}z^2\right),$$

$$u_2(a,z)=ze^{-\frac{1}{4}z^2}\,{}_1F_1\left(\tfrac{1}{2}a+\tfrac{3}{4},\tfrac{3}{2},\tfrac{1}{2}z^2\right)=ze^{\frac{1}{4}z^2}\,{}_1F_1\left(-\tfrac{1}{2}a+\tfrac{3}{4},\tfrac{3}{2},-\tfrac{1}{2}z^2\right).$$

$$U\left(a,0\right)=\frac{\sqrt{\pi}}{2^{\frac{1}{2}a+\frac{1}{4}}\Gamma\left(\frac{3}{4}+\frac{1}{2}a\right)},\quad\text{and } U'\left(a,0\right)=-\frac{\sqrt{\pi}}{2^{\frac{1}{2}a-\frac{1}{4}}\Gamma\left(\frac{1}{4}+\frac{1}{2}a\right)},$$

For $\Re(z)>0$, the function may be in terms of the confluent U-function (see *hyperu()*) by

$$U(a,z)=2^{-\frac{1}{4}-\frac{a}{2}}e^{-\frac{1}{4}z^2}U\left(\frac{a}{2}+\frac{1}{4},\frac{1}{2},\frac{1}{2}z^2\right)$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.CylinderU(5.1,0.5)
ereal('5.2359877559829887307E-1')
>>> math53.CylinderU(15.2,0.5)
ereal('5.351847902755998475 4E-1')
>>> math53.CylinderU(15.2,0.5)
ereal('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; a = '10'; x = '5.0'
>>> \mathrm{d}x = dec.pcfu(a, x); mx = mpm.pcfu(a, x); gx = gmp.pcfu(a, x)
>>> fx = fpm.pcfu(a, x); ax = apm.pcfu(a, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  1.5496568962879376487011318502323980324 54E-11
mpm:  1.5496568962879376487011318502323980324 54e-11
mpm:  1.5496568962879376487011318502323980324 54e-11
fpm:  1.54965689628794E-11
apm:  1.5496568962879376487011318502323980324 54e-11 (1.078e-39%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; a = '10'; z = '5.0 + 3j'
>>> \mathrm{d}z = dec.pcfu(a, z); mz = mpm.pcfu(a, z); gz = gmp.pcfu(a, z)
>>> fz = fpm.pcfu(a, z); az = apm.pcfu(a, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: 5.62444689095875 87524688E-11                + 3.21133245467725 87524688E-11j
mpm: 5.62444689095875 87524688e-11                + 3.21133245467725 87524688e-11j
mpm: 5.62444689095875 87524688e-11                + 3.21133245467725 87524688e-11j
fpm: 5.62444689095875E-11                         + 3.21133245467725E-11j
apm: 5.62444689095875 87524688e-11 (4.383e-20%) + 3.21133245467725 87524688e-11 (7.677e-20%)j
```

11.3.9 Parabolic cylinder function $V(a,x)$

`ctx.cylinder_v`(a,x)

Returns the parabolic cylinder function $V(a,x)$, which can be represented in terms of *pcfu()* as

$$V(a,z) = \frac{\Gamma(a+\frac{1}{2})(U(a,-z) - \sin(\pi a)U(a,z)}{\pi}.$$

See also: MathWorld [1030], Wikipedia [1381], Ehrhardt [295] (3.8.11.3), NIST [776], Mpmath [716].

In DAMath, this is restricted to $2a \in \mathbb{Z}$.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.CylinderV(5.1,0.5)
ereal('5.2359877559829887307E-1')
>>> math53.CylinderV(15.2,0.5)
ereal('5.3518479027559984754E-1')
>>> math53.CylinderV(15.2,0.5)
ereal('5.3518479027559984754E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; a = '10'; x = '5.0'
>>> \mathrm{d}x = dec.pcfv(a, x); mx = mpm.pcfv(a, x); gx = gmp.pcfv(a, x)
>>> fx = fpm.pcfv(a, x); ax = apm.pcfv(a, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  6.3862155065142163776920010554351111083031E+9
mpm:  6.3862155065142163776920010554351111083031e+9
mpm:  6.3862155065142163776920010554351111083031e+9
fpm:  6.38621550651422E+09
apm:  6.3862155065142163776920010554351111083031e+9 (5.404e-39%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; a = '10'; z = '5.0 + 3j'
>>> \mathrm{d}z = dec.pcfv(a, z); mz = mpm.pcfv(a, z); gz = gmp.pcfv(a, z)
>>> fz = fpm.pcfv(a, z); az = apm.pcfv(a, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: 1.1155789211452870283E+9              - 1.0701503668604253775E+9j
mpm: 1.1155789211452870283e+9              - 1.0701503668604253775e+9j
mpm: 1.1155789211452870283e+9              - 1.0701503668604253775e+9j
fpm: 1.11557892114529E+09                  - 1.07015036686043E+09j
apm: 1.1155789211452870283e+9 (8.968e-19%) - 1.0701503668604253775e+9 (-8.499e-19%)j
```

11.3.10 Parabolic cylinder function $W(a, x)$

`ctx.cylinder_w(a, z)`

Returns the parabolic cylinder function $W(a, z)$. See also Wikipedia [1381], MathWorld [1030], NIST [776], Mpmath [717].

The function is defined as

$$W\left(a,x\right)=W\left(a,0\right)w_1(a,x)+W'\left(a,0\right)w_2(a,x).$$

$$W\left(a,0\right)=2^{-\frac{3}{4}}\left|\frac{\Gamma\left(\frac{1}{4}+\frac{1}{2}ia\right)}{\Gamma\left(\frac{3}{4}+\frac{1}{2}ia\right)}\right|^{\frac{1}{2}},\quad W'\left(a,0\right)=-2^{-\frac{1}{4}}\left|\frac{\Gamma\left(\frac{3}{4}+\frac{1}{2}ia\right)}{\Gamma\left(\frac{1}{4}+\frac{1}{2}ia\right)}\right|^{\frac{1}{2}}.$$

$$w_1(a,x)=e^{-\frac{1}{4}ix^2}\,{}_1F_1\left(\tfrac{1}{4}-\tfrac{1}{2}ia,\tfrac{1}{2},\tfrac{1}{2}ix^2\right),\quad w_2(a,x)=xe^{-\frac{1}{4}ix^2}\,{}_1F_1\left(\tfrac{3}{4}-\tfrac{1}{2}ia,\tfrac{3}{2},\tfrac{1}{2}ix^2\right).$$

The function can also be represented as

$$W\left(a,x\right)=\sqrt{k/2}\,e^{\frac{1}{4}\pi a}\left[e^{i\rho}U\left(ia,xe^{-\pi i/4}\right)+e^{-i\rho}U\left(-ia,xe^{\pi i/4}\right)\right].$$

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; a = '10'; x = '5.0'
>>> \mathrm{d}x = dec.pcfw(a, x); mx = mpm.pcfw(a, x); gx = gmp.pcfw(a, x)
>>> fx = fpm.pcfw(a, x); ax = apm.pcfw(a, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  4.662395750711469900575353811000346598048E-7
mpm:  4.662395750711469900575353811000346598048e-7
mpm:  4.662395750711469900575353811000346598048e-7
fpm:  4.66239575071147E-07
apm:  4.662395750711469899862962927504081215235e-7 (5.87e-40%)
```

An example with complex input (this is an example where all digits returned by mpmath are wrong because of insufficient precision):

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; a = '10'; z = '5.0 + 3j'
>>> \mathrm{d}z = dec.pcfw(a, z); mz = mpm.pcfw(a, z); gz = gmp.pcfw(a, z)
>>> fz = fpm.pcfw(a, z); az = apm.pcfw(a, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: 8.80667539337001241O7E-7              - 6.312850075134565494 9E-7j
mpm: 8.80667539337001241O7e-7              - 6.312850075134565494 9e-7j
mpm: 8.80667539337001241O7e-7              - 6.312850075134565494 9e-7j
fpm: 8.80667539337001E-07                  - 6.31285007513457E-07j
apm: 6.9582517470815592536e-8 (7.256e-20%) - 4.9878527483184454344e-8 (-5.061e-20%)j
```

11.4 Error function and related functions

11.4.1 Error function, $\mathrm{erf}(x)$

`ctx.erf(x)`

where `ctx` is `math53`, `mathc53`, `ctxboost`, `ctxflint`.

Returns the error function $\mathrm{erf}(x) = \frac{2}{\sqrt{\pi}} \int_0^x \exp(-t^2) dt$. See also BoostMath [94], BoostMath [74], Wikipedia [1229], MathWorld [839], NIST [771], Ehrhardt [295] (4.2.32), Flint [733], Flint [723], Mpmath [543].

This function returns the value of the error function defined by

$$\mathrm{erf}(z) = \frac{2}{\sqrt{\pi}} \int_0^x e^{-z^2} \mathrm{d}t = \frac{2z}{\sqrt{\pi}} {}_1F_1\left(\tfrac{1}{2}, \tfrac{3}{2}, -z^2\right).$$

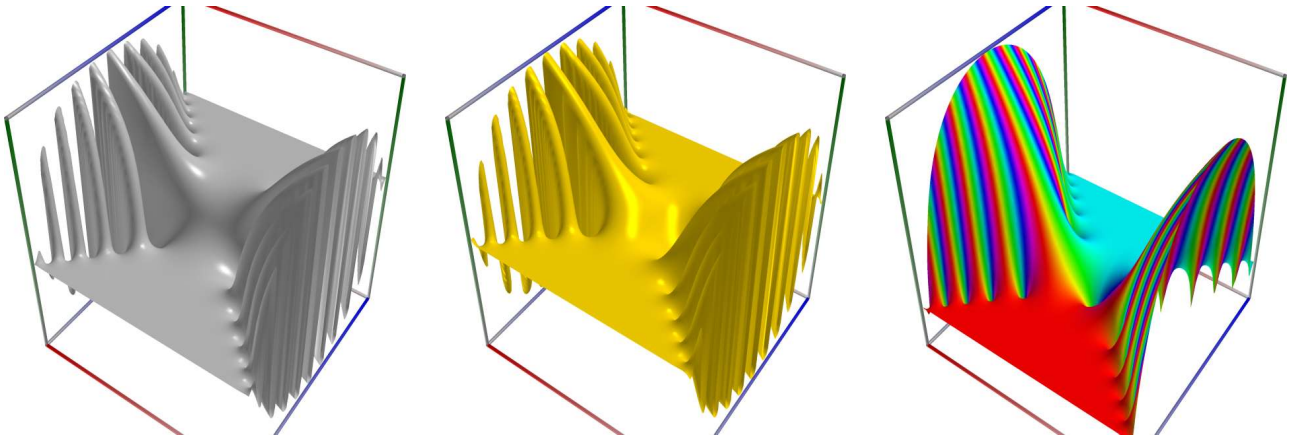

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.Dawson(0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.Dawson('0.51')
ereal('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; x = 3.0
>>> \mathrm{d}x = dec.erf(x); mx = mpm.erf(x); gx = gmp.erf(x)
>>> fx = fpm.erf(x); ax = apm.erf(x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  9.9997790950300141455862722387041767962 01E-1
mpm:  9.9997790950300141455862722387041767962 01e-1
gmp:  9.9997790950300141455862722387041767962 01E-01
fpm:  9.99977909503001E-01
apm:  9.9997790950300141455862722387041767962 02e-1 (5.74e-40%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; z = '3.0 + 4.0j'
```

(continues on next page)

(continued from previous page)

```
>>> \mathrm{d}z = dec.erf(z); mz = mpm.erf(z); gz = gmp.erf(z)
>>> fz = fpm.erf(z); az = apm.erf(z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az], aligned=True)
dec: -1.2018699139507944410E+2               - 2.7750337293623902498E+1j
mpm: -1.2018699139507944410e+2               - 2.7750337293623902498e+1j
gmp: -1.2018699139507944410E+02              - 2.7750337293623902498E+01j
fpm: -1.20186991395079E+02                   - 2.77503372936239E+01j
apm: -1.2018699139507944410e+2 (-9.021e-20%) - 2.7750337293623902498e+1 (-4.884e-20%)j
```

11.4.2 Complementary error function, $\operatorname{erfc}(x)$

`ctx.erfc(x)`

where `ctx` is `math53`, `mathc53`, `ctxboost`, `ctxflint`.

Returns the complementary error function $\operatorname{erfc}(x) = 1 - \operatorname{erf}(x) = \frac{2}{\sqrt{\pi}} \int_x^\infty \exp(-t^2)\,\mathrm{d}t$.

See also BoostMath [74], Wikipedia [1226], MathWorld [840], NIST [771], MathWorld [972], Ehrhardt [295] (3.3.5), Ehrhardt [295] (4.2.33), Mpmath [542].

Returns the value of the complementary error function defined by

$$\operatorname{erfc}(x) = 1 - \operatorname{erfc}(x) = \frac{2}{\sqrt{\pi}} \int_x^\infty e^{-x^2}\,\mathrm{d}t,$$

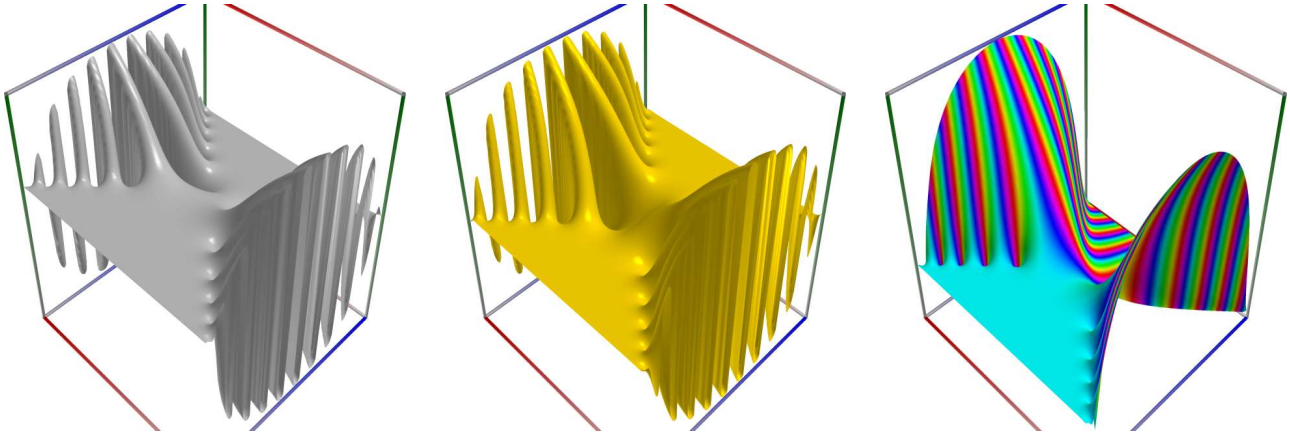

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.Erfc(0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.Erfc('0.51')
ereal('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; x = 3.0
>>> \mathrm{d}x = dec.erfc(x); mx = mpm.erfc(x); gx = gmp.erfc(x)
>>> fx = fpm.erfc(x); ax = apm.erfc(x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  2.2090496998585441372776129582320379847 71E-5
mpm:  2.2090496998585441372776129582320379847 71e-5
gmp:  2.2090496998585441372776129582320379847 71E-05
fpm:  2.20904969985854E-05
apm:  2.2090496998585441372776129582320379847 71e-5 (1.586e-39%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; z = '3.0 + 4.0j'
>>> \mathrm{d}z = dec.erfc(z); mz = mpm.erfc(z); gz = gmp.erfc(z)
```

(continues on next page)

(continued from previous page)

```
>>> fz = fpm.erfc(z); az = apm.erfc(z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az], aligned=True)
dec: 1.2118699139507944410E+2              + 2.7750337293623902498E+1j
mpm: 1.2118699139507944410e+2              + 2.7750337293623902498e+1j
gmp: 1.2118699139507944410E+02             + 2.7750337293623902498E+01j
fpm: 1.211869991395079E+02                 + 2.77503372936239E+01j
apm: 1.2118699139507944410e+2 (8.947e-20%) + 2.7750337293623902498e+1 (4.884e-20%)j
```

11.4.3 Inverse of the real error function, $\mathrm{erf}^{-1}(x)$

`ctx.erf_inv(q)`

where `ctx` is `math53`, `ctxcpp`, `ctxboost` or `ctxflint`.

Returns the inverse of the real error function, satisfying $\mathrm{erf}(\mathrm{erfinv}(x)) = \mathrm{erfinv}(\mathrm{erf}(x)) = x$. See also BoostMath [73], Wikipedia [1229], MathWorld [845], NIST [771], Flint [733], Mpmath [549].

This function is defined only for $-1 \le x \le 1$.

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; q = '0.007'
>>> \mathrm{d}x = dec.erfinv(q); mx = mpm.erfinv(q); ix = ipm.erfinv(q)
>>> fx = fpm.erfinv(q); gx = gmp.erfinv(q); ax = apm.erfinv(q)
>>> mpm.show([\mathrm{d}x, mx, ix, fx, gx, ax])
dec:  6.203668061000835402417689089205287381720E-3
mpm:  6.203668061000835531560785950441696784170e-3
ipm:  6.203668061000835531560785950441696784170e-3 (7.228e-40%)
fpm:  6.20366806100084E-03
gmp:  6.203668061000835315388357571464439388365E-03
apm:  6.203668061000835531560785950441696784170e-3 (7.228e-40%)
```

11.4.4 Inverse of the real complementory error function, $\mathrm{erfc}^{-1}(x)$

`ctx.`**`erfc_inv`**`(`q`)`

where `ctx` is `math53`, `ctxcpp`, `ctxboost` or `ctxflint`.

Returns the inverse of the real complementory error function, satisfying $\mathrm{erfc}(\mathrm{erfcinv}(x)) = \mathrm{erfcinv}(\mathrm{erfc}(x)) = x$. See also BoostMath [73], Wikipedia [1226], MathWorld [846], NIST [771], Flint [733].

This function is defined only for $-1 \le x \le 1$.

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; q = '0.007'
>>> \mathrm{d}x = dec.erfcinv(q); mx = mpm.erfcinv(q); ix = ipm.erfcinv(q)
>>> fx = fpm.erfcinv(q); gx = gmp.erfcinv(q); ax = apm.erfcinv(q)
>>> mpm.show([gx, fx, ax])
dec:  1.906956864670945611335498085438891420125E+0
mpm:  1.906956864670945606433652487714446631717e+0
ipm:  1.906956864670945606433652487714446631717e+0 (6.02e-40%)
fpm:  1.90695686467095E+00
gmp:  1.906956864670945611335498085438891420125E+00
apm:  1.906956864670945606433652487714446631717e+0 (6.02e-40%)
```

11.4.5 Standard normal density function $\phi(x)$

`ctx.ndens`(x)

where `ctx` is `math53`, `ctxcpp`, `ctxboost` or `ctxflint`.

Note: also ctx.erfZ(x), ctx.ndens(x), mathc53.Ndens(x)

Returns the Gaussian density function $\phi(z) = \frac{1}{\sqrt{2\pi}} \exp(-z^2)$. See also: Ehrhardt [295] (3.3.12.3) and (3.9.28).

An example:

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; x = '1.2'; mu = '0'; sd = '1';
>>> \mathrm{d}x = dec.normal_pdf(x, mu, sd); mx = mpm.normal_pdf(x, mu, sd)
>>> ix = ipm.normal_pdf(x, mu, sd); fx = fpm.normal_pdf(x, mu, sd)
>>> gx = gmp.normal_pdf(x, mu, sd); ax = apm.normal_pdf(x, mu, sd)
>>> mpm.show([\mathrm{d}x, mx, ix, fx, gx, ax])
dec:  1.941860549832129404120911390335162607571E-1
mpm:  1.941860549832129404120911390335162607571e-1
ipm:  1.941860549832129404120911390335162607571e-1 (5.173e-39%)
fpm:  1.94186054983213E-01
gmp:  1.941860549832129404120911390335162607571E-01
ipm:  1.941860549832129404120911390335162607571e-1 (5.173e-39%)
```

11.4.6 Standard normal cumulative distribution function $\Phi(x)$

`ctx.ndis(x)`

where `ctx` is `math53`, `ctxcpp`, `ctxboost` or `ctxflint`.

Note: also ctx.erfP(x), ctx.ndis(x), mathc53.Ndis(x)

Returns the integral $\Phi(z) = \frac{1}{\sqrt{2\pi}} \int_{-\infty}^{z} \exp(-t^2)\,\mathrm{d}t = \frac{1}{2}\mathrm{erfc}\left(-\frac{z}{\sqrt{2}}\right)$.

See also BoostMath [74], Wikipedia [1226], MathWorld [840], NIST [771], MathWorld [972], Ehrhardt [295] (3.3.12.1) and (3.9.28).

An example:

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; x = '1.2'; mu = '0'; sd = '1';
>>> \mathrm{d}x = dec.normal_cdf(x, mu, sd); mx = mpm.normal_cdf(x, mu, sd)
>>> ix = ipm.normal_cdf(x, mu, sd); fx = fpm.normal_cdf(x, mu, sd)
>>> gx = gmp.normal_cdf(x, mu, sd); ax = apm.normal_cdf(x, mu, sd)
>>> mpm.show([\mathrm{d}x, mx, ix, fx, gx, ax])
dec:  8.84930329778291731977779793043364851324 5E-1
mpm:  8.84930329778291731977779793043364851324 6e-1
ipm:  8.84930329778291731977779793043364851324 5e-1 (6.486e-40%)
fpm:  8.84930329778292E-01
gmp:  8.84930329778291731977779793043364851324 6E-01
ipm:  8.84930329778291731977779793043364851324 6e-1 (1.297e-39%)
```

11.4.7 Standard normal quantile function $\Phi^{-1}(q)$

`math53.ndisx(q)`

where `ctx` is `math53`, `ctxcpp`, `ctxboost` or `ctxflint`.

Returns the standard normal quantile function $\Phi^{-1}(q)$, defined as $\Phi^{-1}(q) = -\sqrt{2}\,\mathrm{erfc_inv}(2q)$.

See also BoostMath [74], Wikipedia [1226], MathWorld [840], NIST [771], MathWorld [972], Ehrhardt [295] (3.3.12.1) and (3.9.28).

An example:

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; q = '0.2'; mu = '0'; sd = '1';
>>> \mathrm{d}x = dec.normal_qtf(q, mu, sd); mx = mpm.normal_qtf(q, mu, sd)
>>> ix = ipm.normal_qtf(q, mu, sd); fx = fpm.normal_qtf(q, mu, sd)
>>> gx = gmp.normal_qtf(q, mu, sd); ax = apm.normal_qtf(q, mu, sd)
>>> mpm.show([\mathrm{d}x, mx, ix, fx, gx, ax])
dec:  -8.41621233572914205178706121363248100626 5E-1
mpm:  -8.41621233572914205178706121363248100626 3e-1
ipm:  -8.41621233572914205178706121363248100626 3e-1 (-2.728e-39%)
fpm:  -8.41621233572914E-01
gmp:  -8.41621233572914205178706121363248100626 3E-01
ipm:  -8.41621233572914205178706121363248100626 3e-1 (-2.728e-39%)
```

11.4.8 Imaginary error function, $\operatorname{erfi}(x)$

`ctx.erfi(x)`

where `ctx` is `math53`, `mathc53`, `ctxflint`.

Returns the imaginary error function $\operatorname{erfi}(x) = \frac{2}{\sqrt{\pi}} \int_0^x \exp(t^2)\,dt = \frac{1}{i}\operatorname{erf}(ix) = \frac{2}{\sqrt{\pi}} e^{x^2} \operatorname{dawson}(x)$.

See also Wikipedia [1234], MathWorld [841], Ehrhardt [295] (3.3.8), Flint [733], Flint [723], Mpmath [544].

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.Erfi(0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.Erfi('0.51')
ereal('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; x = 3.0
>>> \mathrm{d}x = dec.erfi(x); mx = mpm.erfi(x); gx = gmp.erfi(x)
>>> fx = fpm.erfi(x); ax = apm.erfi(x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  1.6299946226015656510616479520762741627 79E+3
mpm:  1.6299946226015656510616479520762741627 79e+3
gmp:  1.6299946226015656510616479520762741627 79E+03
fpm:  1.62999462260157E+03
apm:  1.6299946226015656510616479520762741627 79e+3 (7.212e-40%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; z = '3.0 + 4.0j'
>>> \mathrm{d}z = dec.erfi(z); mz = mpm.erfi(z); gz = gmp.erfi(z)
>>> fz = fpm.erfi(z); az = apm.erfi(z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az], aligned=True)
dec: -4.9720260544966036460E-5              + 9.9991066178539168236E-1j
mpm: -4.9720260544966036460e-5              + 9.9991066178539168236e-1j
gmp: -4.9720260544966036460E-05             + 9.9991066178539168236E-01j
fpm: -4.97202605449660E-05                  + 9.99910661785392E-01j
apm: -4.9720260544966036460e-5 (-1.56e-18%) + 9.9991066178539168236e-1 (4.236e-20%)j
```

11.4.9 Dawson integral, $F(x)$

`ctx.dawson(x)`

Returns the Dawson integral $F(z) = e^{-z^2} \int_0^z e^{t^2}\,\mathrm{d}t = \frac{\sqrt{\pi}}{2} e^{-z^2}\,\mathrm{erfi}(z) = \frac{i\sqrt{\pi}}{2}\left[e^{-z^2} - w(z)\right]$.

See also Wikipedia [1333], MathWorld [968], Ehrhardt [295] (3.3.1), NIST [432].

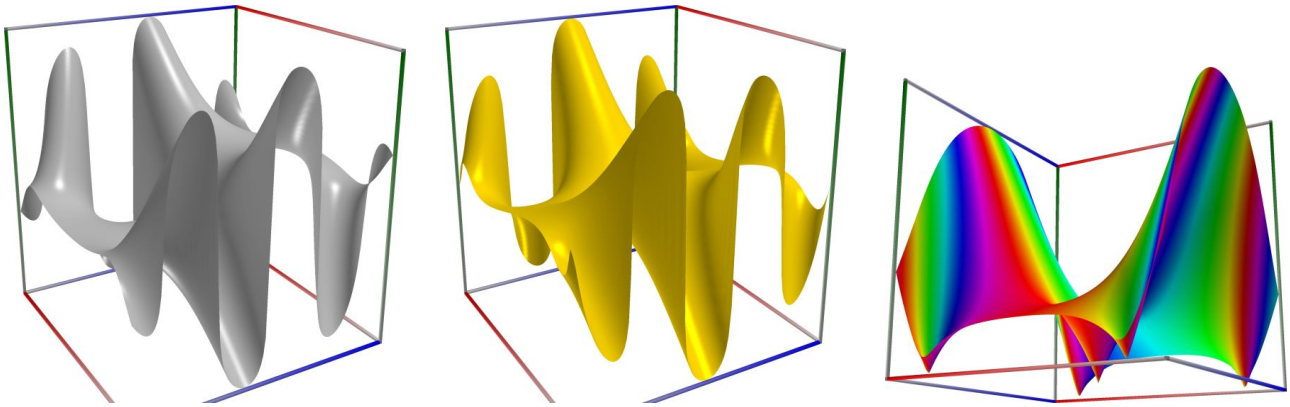

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.Dawson(0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.Dawson('0.51')
ereal('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; x = 3.0
>>> \mathrm{d}x = dec.dawson(x); mx = mpm.dawson(x); gx = gmp.dawson(x)
>>> fx = fpm.dawson(x); ax = apm.dawson(x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  1.782710306105582873425994922405126302292E-1
mpm:  1.782710306105582873425994922405126302292e-1
gmp:  1.782710306105582873425994922405126302292E-01
fpm:  1.78271030610558E-01
apm:  1.782710306105582873425994922405126302293e-1 (1.409e-37%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; z = '3.0 + 4.0j'
>>> \mathrm{d}z = dec.dawson(z); mz = mpm.dawson(z); gz = gmp.dawson(z)
>>> fz = fpm.dawson(z); az = apm.dawson(z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az], aligned=True)
dec: -8.8004253885450449691E+2               + 4.1216449595391869731E+2j
mpm: -8.8004253885450449691e+2               + 4.1216449595391869731e+2j
gmp: -8.8004253885450449691E+02              + 4.1216449595391869731E+02j
fpm: -8.80042538854505E+02                   + 4.12164495953919E+02j
apm: -8.8004253885450449493e+2 (-4.535e-16%) + 4.1216449595391869602e+2 (4.615e-16%)j
```

11.4.10 Faddeeva function, $w(z)$

`ctx.faddeeva(z)`

Returns the Faddeeva function function $w(z) := e^{-z^2}\operatorname{erfc}(-iz) = \operatorname{erfcx}(-iz) = e^{-z^2}\left(1 + \frac{2i}{\sqrt{\pi}}\int_0^z e^{t^2}\,\mathrm{d}t\right)$.

See also Wikipedia [1316], NIST [433].

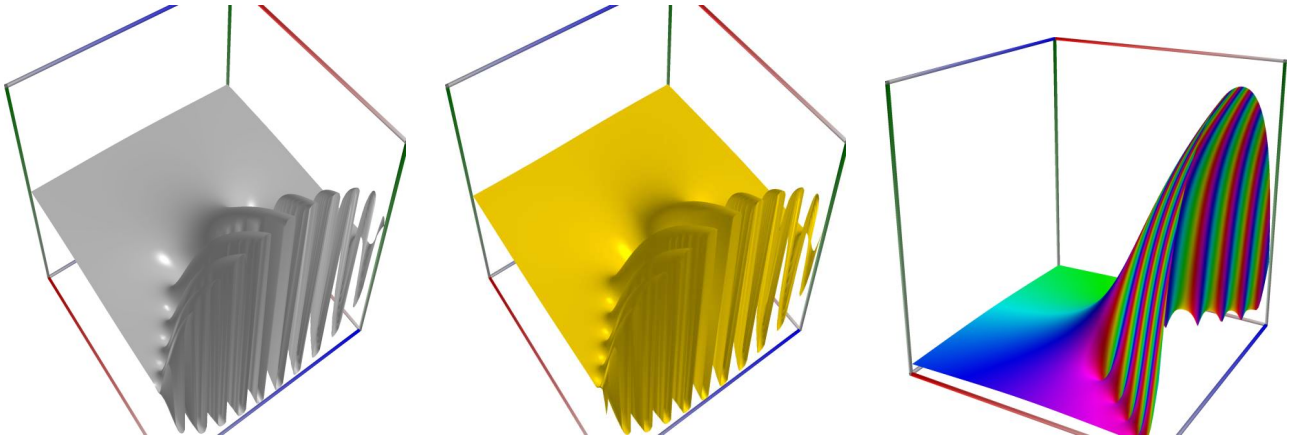

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example in Python

```
>>> from xlcalcnet import ecplx
>>> ecplx.Faddeeva(0.5)
ecplx('5.235987755982988730 7E-1')
>>> ecplx.Faddeeva('0.1')
ecplx('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; x = 3.0
>>> \mathrm{d}x = dec.faddeeva(x); mx = mpm.faddeeva(x); gx = gmp.faddeeva(x)
>>> fx = fpm.faddeeva(x); ax = apm.faddeeva(x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax], aligned=True)
dec: 1.2340980408667954950E-4              + 2.0115731703760038666E-1j
mpm: 1.2340980408667954950e-4              + 2.0115731703760038666e-1j
gmp: 1.2340980408667954950E-04             + 2.0115731703760038666E-01j
fpm: 1.23409804086680E-04                  + 2.0115731703760 0E-01j
apm: 1.2340980408667954950e-4 (8.378e-20%) + 2.0115731703760038666e-1 (3.158e-19%)j
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; z = '3.0 + 4.0j'
>>> \mathrm{d}z = dec.faddeeva(z); mz = mpm.faddeeva(z); gz = gmp.faddeeva(z)
>>> fz = fpm.faddeeva(z); az = apm.faddeeva(z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az], aligned=True)
dec: 9.0933904194765342461E-2              + 6.5592330527914277737E-2j
mpm: 9.0933904194765342461e-2              + 6.5592330527914277737e-2j
gmp: 9.0933904194765342461E-02             + 6.5592330527914277737E-02j
fpm: 9.09339041947653E-02                  + 6.55923305279143E-02j
apm: 9.0933904194765342460e-2 (2.911e-19%) + 6.5592330527914277737e-2 (4.035e-19%)j
```

11.4.11 Fresnel sine integral, $S(x)$

`ctx.fresnel_s(z)`

where `ctx` is `math53`, `mathc53`, `ctxflint`.

Returns the Fresnel sine integral $S(x) = \int_0^x \sin\left(\frac{\pi t^2}{2}\right) \mathrm{d}t$.

See also Wikipedia [1317], MathWorld [976], NIST [773],, Ehrhardt [295] (3.3.14), Flint [733], Flint [723], Mpmath [652].

The complex Fresnel sine integral can be expressed using the error function as follows:

$$S(z) = \sqrt{\frac{\pi}{2}} \frac{1+i}{4} \left[\operatorname{erf}\left(\frac{1+i}{\sqrt{2}} z\right) - i \operatorname{erf}\left(\frac{1-i}{\sqrt{2}} z\right) \right].$$

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.fresnel.html#scipy.special.fresnel

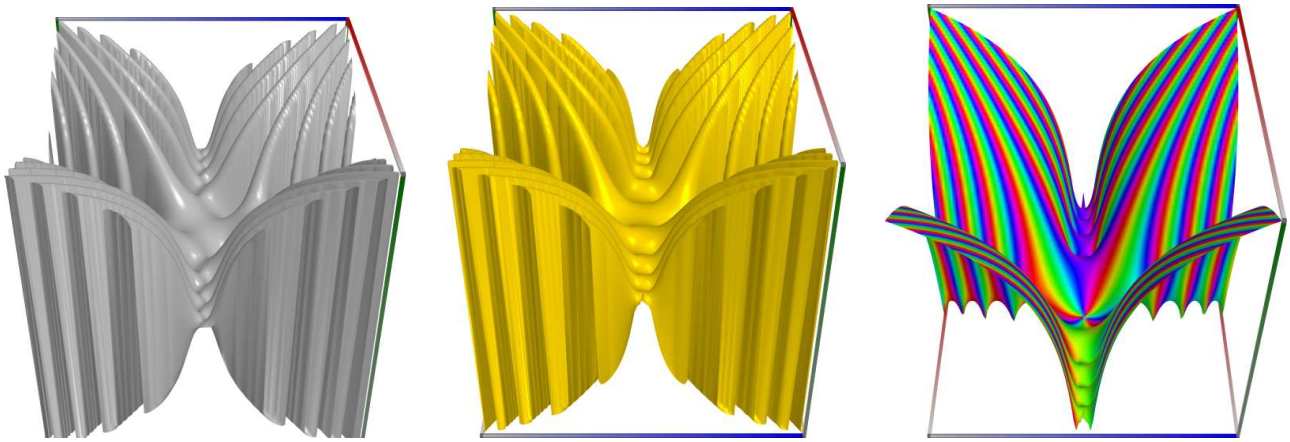

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.FresnelS(0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.FresnelS('0.51')
ereal('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; x = 3.0
>>> \mathrm{d}x = dec.fresnels(x); mx = mpm.fresnels(x); gx = gmp.fresnels(x)
>>> fx = fpm.fresnels(x); ax = apm.fresnels(x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  4.96312998967375036097612265299112103856 5E-1
mpm:  4.96312998967375036097612265299112103856 5e-1
gmp:  4.96312998967375036097612265299112103856 5E-01
fpm:  4.96312998967375E-01
apm:  4.96312998967375036097612265299112103856 5e-1 (9.252e-39%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; z = '3.0 + 4.0j'
```

(continues on next page)

(continued from previous page)

```
>>> \mathrm{d}z = dec.fresnels(z); mz = mpm.fresnels(z); gz = gmp.fresnels(z)
>>> fz = fpm.fresnels(z); az = apm.fresnels(z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az], aligned=True)
dec: 6.0975480744693149379E+14             + 4.5370167667746719242E+14j
mpm: 6.0975480744693149379e+14             + 4.5370167667746719242e+14j
gmp: 6.0975480744693149379E+14             + 4.5370167667746719242E+14j
fpm: 6.09754807446932E+14                  + 4.53701676677467E+14j
apm: 6.0975480744693149379e+14 (7.82e-20%) + 4.5370167667746719242e+14 (5.255e-20%)j
```

11.4.12 Fresnel cosine integral, $C(x)$

`ctx.fresnel_c(z)`

where `ctx` is `math53`, `mathc53`, `ctxflint`.

Returns the Fresnel cosine integral $C(x) = \int_0^x \cos\left(\frac{\pi t^2}{2}\right) \mathrm{d}t$.

See also Wikipedia [1317], MathWorld [975], NIST [773], Ehrhardt [295] (3.3.14), Flint [733], Flint [723], Mpmath [651].

The complex Fresnel cosine integral can be expressed using the error function as follows:

$$C(z) = \sqrt{\frac{\pi}{2}} \frac{1-i}{4} \left[\operatorname{erf}\left(\frac{1+i}{\sqrt{2}} z\right) + i \operatorname{erf}\left(\frac{1-i}{\sqrt{2}} z\right) \right].$$

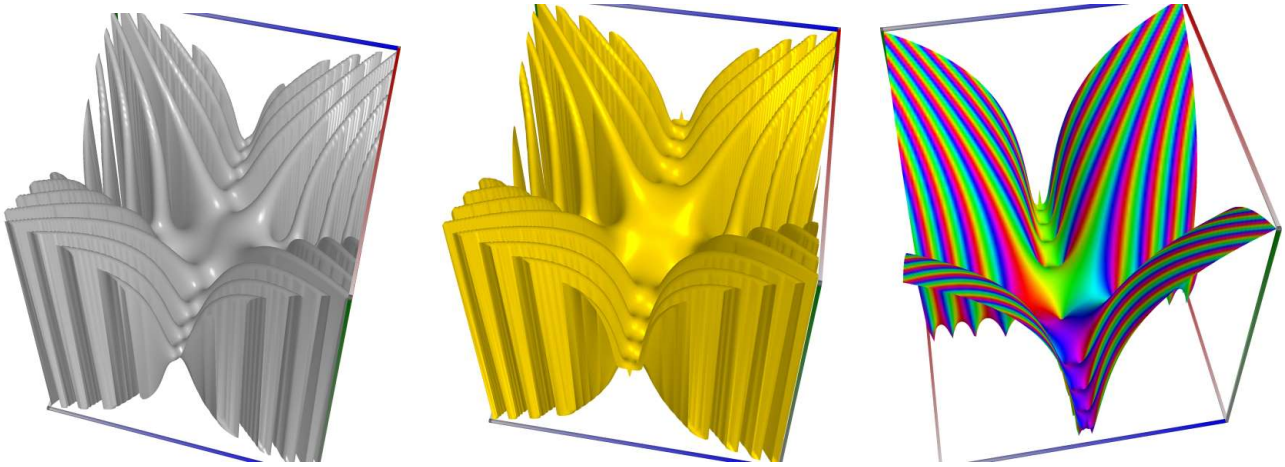

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.FresnelC(0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.FresnelC('0.51')
ereal('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; x = 3.0
>>> \mathrm{d}x = dec.fresnelc(x); mx = mpm.fresnelc(x); gx = gmp.fresnelc(x)
>>> fx = fpm.fresnelc(x); ax = apm.fresnelc(x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  6.0572078929768562955616107428715469714 52E-1
mpm:  6.0572078929768562955616107428715469714 52e-1
gmp:  6.0572078929768562955616107428715469714 52E-01
fpm:  6.05720789297686E-01
apm:  6.0572078929768562955616107428715469714 52e-1 (9.476e-40%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; z = '3.0 + 4.0j'
>>> \mathrm{d}z = dec.fresnelc(z); mz = mpm.fresnelc(z); gz = gmp.fresnelc(z)
```

(continues on next page)

(continued from previous page)

```
>>> fz = fpm.fresnelc(z); az = apm.fresnelc(z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az], aligned=True)
dec: 4.5370167667746769242E+14              - 6.0975480744693099379E+14j
mpm: 4.5370167667746769242e+14              - 6.0975480744693099379e+14j
gmp: 4.5370167667746769242E+14              - 6.0975480744693099379E+14j
fpm: 4.53701676677468E+14                   - 6.097548074469 31E+14j
apm: 4.5370167667746769242e+14 (5.255e-20%) - 6.0975480744693099379e+14 (-7.82e-20%)j
```

11.4.13 Owen's T function, $T(h, a)$

`ctx.owen_t`(h, a)

where `ctx` is `math53` or `ctxflint`.

Returns Owen's T function $T(h,a) = \dfrac{1}{2\pi}\displaystyle\int_0^a f(x)\mathrm{d}x = \dfrac{a}{4\pi}\int_{-1}^1 f(ax)\mathrm{d}x, \quad f(x) = \dfrac{e^{-\frac{1}{2}h^2(1+x^2)}}{1+x^2}, \quad (-\infty < h, a < +\infty).$

See also Owen [451], and Patefield and Tand [461], Wikipedia [1347], MathWorld [1008], Ehrhardt [295] (3.3.17).

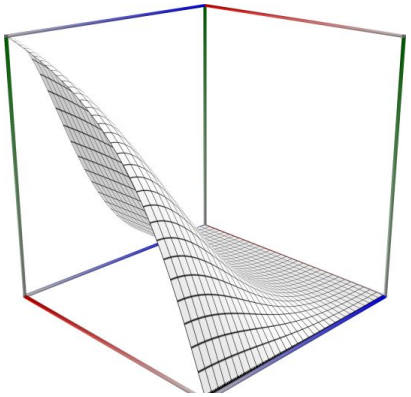

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.OwenT(2.5, 0.5)
ereal('5.2359877559829887307E-1')
>>> math53.OwenT(2.5, '0.51')
ereal('5.3518479027559984754E-1')
```

11.5 Exponential integrals, and related functions

11.5.1 Exponential integral $E_1(x)$

`ctx.exp_integral_e1(`x`)`

where `ctx` is `math53` or `ctxflint`.

Returns the exponential integral $E_1(x) = \int_1^\infty \frac{e^{-xt}}{t}\,\mathrm{d}t, = e^{-z}U(1,1,z), \quad x \neq 0.$

For real $x < 0$ the integral can be calculated as $E_1(x) = -\mathrm{Ei}(-x)$.

See also Wikipedia [1315], MathWorld [973], NIST [772], BoostMath [154], Ehrhardt [295] (3.4.5), Ehrhardt [295] (4.2.27), Flint [768], Flint [762], Mpmath [648].

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.E1(0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.E1('0.51')
ereal('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; x = 3.0
>>> \mathrm{d}x = dec.e1(x); mx = mpm.e1(x); gx = gmp.e1(x)
>>> fx = fpm.e1(x); ax = apm.e1(x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  1.3048381094197037412500745828645022948 48E-2
mpm:  1.3048381094197037412500745828645022948 48e-2
gmp:  1.3048381094197037412500745828645022948 48E-02
fpm:  1.30483810941970E-02
apm:  1.3048381094197037412500745828645022948 48e-2 (8.248e-39%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; z = '3.0 + 4.0j'
>>> \mathrm{d}z = dec.e1(z); mz = mpm.e1(z); gz = gmp.e1(z)
>>> fz = fpm.e1(z); az = apm.e1(z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az], aligned=True)
dec: 8.6395395897958511158E-4              + 8.78620837719744204 18E-3j
mpm: 8.6395395897958511158e-4              + 8.78620837719744204 18e-3j
gmp: 8.6395395897958511158E-04             + 8.78620837719744204 18E-03j
fpm: 8.63953958979585E-04                  + 8.78620837719744E-03j
apm: 8.6395395897958511148e-4 (8.234e-17%) + 8.78620837719744204 18e-3 (7.381e-18%)j
```

11.5.2 Exponential integral $\mathrm{Ei}(x)$

`ctx.exp_integral_ei(x)`

where `ctx` is `math53`, `mathc53`, `ctxboost` or `ctxflint`.

Returns the exponential integral $\mathrm{Ei}(x) = -PV\int_{-x}^{\infty} \frac{e^{-t}}{t}\,\mathrm{d}t = PV\int_{-\infty}^{x} \frac{e^{t}}{t}\,\mathrm{d}t$.

For real $x < 0$ we have $\mathrm{Ei}(x) = -E_1(-x)$.

See also Wikipedia [1315], MathWorld [973], NIST [772], BoostMath [154], Ehrhardt [295] (3.4.7), Ehrhardt [295] (4.2.27), Flint [768], Flint [762], Mpmath [649].

The exponential integral $\mathrm{Ei}(z)$ can also be calculated as using

$$\mathrm{Ei}(z) = -e^z U(1,1,-z) - \log(-z) + \frac{1}{2}\left(\log(z) - \log\left(\frac{1}{z}\right)\right)$$

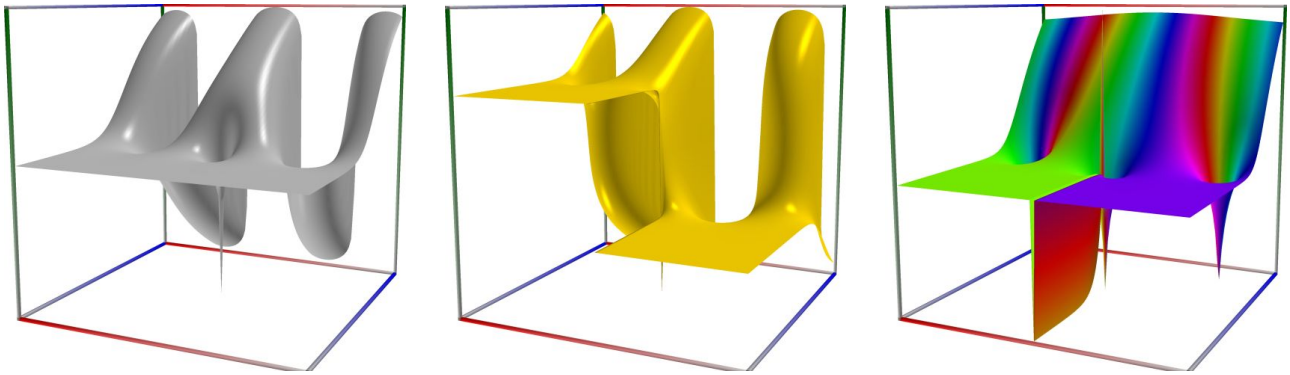

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.Ei(0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.Ei('0.51')
ereal('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; x = 3.0
>>> \mathrm{d}x = dec.ei(x); mx = mpm.ei(x); gx = gmp.ei(x)
>>> fx = fpm.ei(x); ax = apm.ei(x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  9.9338325706254165580083360192167652629 91E+0
mpm:  9.9338325706254165580083360192167652629 91e+0
gmp:  9.9338325706254165580083360192167652629 91E+00
fpm:  9.93383257062542E+00
apm:  9.9338325706254165580083360192167652629 91e+0 (9.245e-40%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; z = '3.0 + 4.0j'
>>> \mathrm{d}z = dec.ei(z); mz = mpm.ei(z); gz = gmp.ei(z)
```

(continues on next page)

(continued from previous page)

```
>>> fz = fpm.ei(z); az = apm.ei(z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az], aligned=True)
dec: -4.1540916516426898225E+0               + 4.2944186200243574770E+0j
mpm: -4.1540916516426898225e+0               + 4.2944186200243574770e+0j
gmp: -4.1540916516426898225E+00              + 4.2944186200243574770E+00j
fpm: -4.15409165164269E+00                   + 4.29441862002436E+00j
apm: -4.1540916516426898225e+0 (-8.156e-20%) + 4.2944186200243574770e+0 (7.89e-20%)j
```

11.5.3 Logarithmic integral $\mathrm{li}(x)$

`ctx.log_integral(z)`

where `ctx` is `math53`, `mathc53` or `ctxflint`.

Returns the logarithmic integral $\mathrm{li}(x) = PV \int_0^x \frac{1}{\log(t)}\,\mathrm{d}t, \quad (x \geq 0, x \neq 1)$.

For $x \neq 0$ the integral is calculated as $\mathrm{li}(x) = \mathrm{Ei}(\log(x))$.

See also Wikipedia [1324], MathWorld [984], NIST [775], Ehrhardt [295] (3.4.15), Ehrhardt [295] (4.2.40), Flint [768], Flint [762], Mpmath [656].

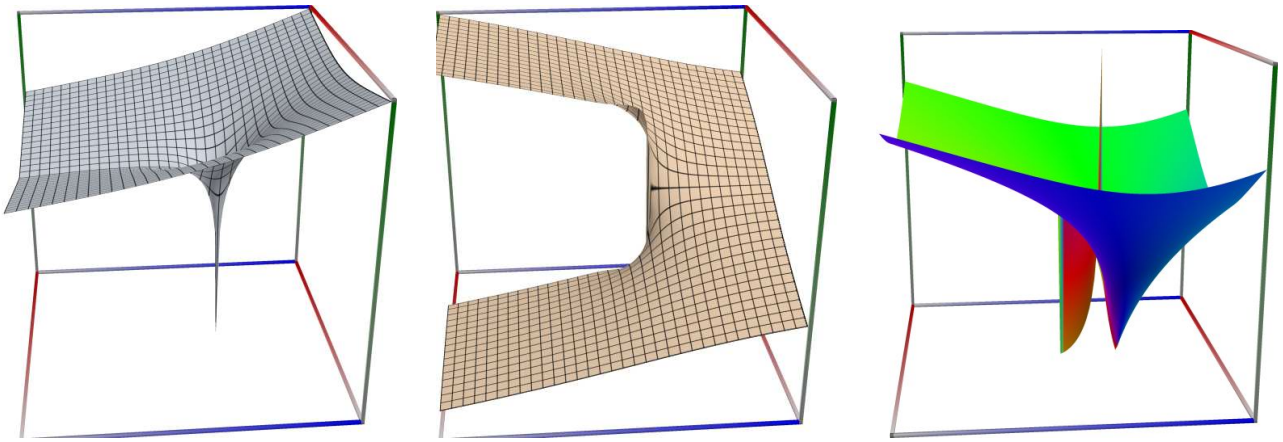

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \leq x \leq 6$ (blue axis), $-6 \leq y \leq 6$ (red axis), $-10 \leq z \leq 10$ (green axis). Function values are *loglog-transformed*.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.Li(0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.Li('0.51')
ereal('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; x = 3.0
>>> \mathrm{d}x = dec.li(x); mx = mpm.li(x); gx = gmp.li(x)
>>> fx = fpm.li(x); ax = apm.li(x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  2.1635885946671919728769223673477217 3665 42E+0
mpm:  2.1635885946671919728769223673477217 3665 42e+0
gmp:  2.1635885946671919728769223673477217 3665 42E+00
fpm:  2.16358859466719E+00
apm:  2.1635885946671919728769223673477217 3665 42e+0 (1.061e-39%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; z = '3.0 + 4.0j'
>>> \mathrm{d}z = dec.li(z); mz = mpm.li(z); gz = gmp.li(z)
>>> fz = fpm.li(z); az = apm.li(z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az], aligned=True)
dec: 3.1343755504645775265E+0              + 2.6769247817778742392E+0j
mpm: 3.1343755504645775265e+0              + 2.6769247817778742392e+0j
```

(continues on next page)

(continued from previous page)

```
gmp: 3.134375550464577526 5E+00              + 2.676924781777874239 2E+00j
fpm: 3.13437555046458E+00                    + 2.67692478177787E+00j
apm: 3.134375550464577526 5e+0 (1.081e-19%) + 2.676924781777874239 2e+0 (6.328e-20%)j
```

11.5.4 Hyperbolic sine integral $\mathrm{Shi}(x)$

`ctx.sinh_integral(`x`)`

where `ctx` is `math53`, `ctxflint`.

Returns the hyperbolic sine integral $\mathrm{Shi}(x) = \int_0^x \frac{\sinh(t)}{t}\,\mathrm{d}t$.

See also Wikipedia [1321], MathWorld [980], NIST [774], Ehrhardt [295] (3.4.17), Flint [768], Flint [762], Mpmath [659].

For real x the integral is calculated using the relations $\mathrm{Shi}(x) = \frac{1}{2}\left(\mathrm{Ei}(x) + \mathrm{E}_1(x)\right)$ for $x > 0$ and $\mathrm{Shi}(x) = -\mathrm{Shi}(-x)$ for $x < 0$.

For complex x the integral is calculated using the relation $\mathrm{Shi}(x) = -i\mathrm{Si}(ix)$.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.Shi(0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.Shi('0.51')
ereal('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; x = 3.0
>>> \mathrm{d}x = dec.shi(x); mx = mpm.shi(x); gx = gmp.shi(x)
>>> fx = fpm.shi(x); ax = apm.shi(x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  4.9734404758598067977104183825227051429 70E+0
mpm:  4.9734404758598067977104183825227051429 70e+0
gmp:  4.9734404758598067977104183825227051429 70E+00
fpm:  4.97344047585981E+00
apm:  4.9734404758598067977104183825227051429 70e+0 (9.233e-40%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; z = '3.0 + 4.0j'
>>> \mathrm{d}z = dec.shi(z); mz = mpm.shi(z); gz = gmp.shi(z)
>>> fz = fpm.shi(z); az = apm.shi(z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az], aligned=True)
dec: -2.0766138488418551187E+0               + 2.1516024142007774595E+0j
mpm: -2.0766138488418551187e+0               + 2.1516024142007774595e+0j
gmp: -2.0766138488418551187E+00              + 2.1516024142007774595E+00j
fpm: -2.07661384884186E+00                   + 2.15160241420078E+00j
apm: -2.0766138488418551187e+0 (-1.632e-19%) + 2.1516024142007774595e+0 (7.874e-20%)j
```

11.5.5 Hyperbolic cosine integral $\mathrm{Chi}(x)$

`ctx.cosh_integral(`x`)`

where `ctx` is `math53`, `ctxflint`.

Note: Also ctx.chi(z), ctx.coshIntegral(z)

Returns the hyperbolic cosine integral $\mathrm{Chi}(x) = -\int_x^\infty \frac{\cosh(t)}{t}\,\mathrm{d}t = \gamma + \log(x) + \int_0^x \frac{\cosh(t)-1}{t}\,\mathrm{d}t$.

See also Wikipedia [1320], MathWorld [979], NIST [774], Ehrhardt [295] (3.4.1), Flint [768], Flint [762], Mpmath [644].

For real x the integral is calculated using the relations $\mathrm{Chi}(x) = \frac{1}{2}\left(\mathrm{Ei}(x) - \mathrm{E}_1(x)\right)$ for $x > 0$ and $\mathrm{Chi}(x) = \mathrm{Chi}(-x)$ for $x < 0$.

For complex x the integral is calculated using the relation $\mathrm{Chi}(x) = \mathrm{Ci}(ix) - \log(ix) + \log(x)$.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.Chi(0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.Chi('0.51')
ereal('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; x = 3.0
>>> \mathrm{d}x = dec.chi(x); mx = mpm.chi(x); gx = gmp.chi(x)
>>> fx = fpm.chi(x); ax = apm.chi(x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  4.960392094765609760297917636694060120021E+0
mpm:  4.960392094765609760297917636694060120021e+0
gmp:  4.960392094765609760297917636694060120021E+00
fpm:  4.96039209476561E+00
apm:  4.960392094765609760297917636694060120020e+0 (6.387e-38%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; z = '3.0 + 4.0j'
>>> \mathrm{d}z = dec.chi(z); mz = mpm.chi(z); gz = gmp.chi(z)
>>> fz = fpm.chi(z); az = apm.chi(z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az], aligned=True)
dec: -2.0774778028008347038E+0               + 2.1428162058235800175E+0j
mpm: -2.0774778028008347038e+0               + 2.1428162058235800175e+0j
gmp: -2.0774778028008347038E+00              + 2.1428162058235800175E+00j
fpm: -2.07747780280083E+00                   + 2.14281620582358E+00j
apm: -2.0774778028008347038e+0 (-1.631e-19%) + 2.1428162058235800175e+0 (1.581e-19%)j
```

11.5.6 Generalized exponential integral $E_n(x)$

`ctx.exp_integral_en(`n, z`)`

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns the generalized exponential integral of integer order $E_n(x) = \int_1^\infty \frac{e^{-xt}}{t^n}\,\mathrm{d}t, \quad (n \geq 0)$.

See also Wikipedia [1315], MathWorld [974], NIST [460], BoostMath [155], Ehrhardt [295] (3.4.12), Mpmath [650].

The function can be generalized for complex s and complex z using

$$\mathrm{E}_{1-s}(z) = z^{-s}\Gamma(s, z).$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.En(3, 0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.En(3, '0.51')
ereal('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; n = '4'; x = '5.0'
>>> \mathrm{d}x = dec.expint(n, x); mx = mpm.expint(n, x); gx = gmp.expint(n, x)
>>> fx = fpm.expint(n, x); ax = apm.expint(n, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  7.829808450774252432788031803000123235715E-4
mpm:  7.829808450774252432788031803000123235715e-4
gmp:  7.829808450774252432788031803000123235715E-04
fpm:  7.82980845077425E-04
apm:  7.829808450774252432788031803000123235723e-4 (2.172e-36%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; n = '4'; z = '5.0 + 3.0j'
>>> \mathrm{d}z = dec.expint(n, z); mz = mpm.expint(n, z); gz = gmp.expint(n, z)
>>> fz = fpm.expint(n, z); az = apm.expint(n, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az], aligned=True)
dec: -7.1820162264651649511E-4                + 1.4860820449934938829E-4j
mpm: -7.1820162264651649511e-4                + 1.4860820449934938829e-4j
gmp: -7.1820162264651649511E-04               + 1.4860820449934938829E-04j
fpm: -7.18201622646517E-04                    + 1.48608204499349E-04j
apm: -7.1820162264651649571e-4 (-1.103e-15%) + 1.4860820449934939066e-4 (8.075e-15%)j
```

11.5.7 Sine integral $\mathrm{Si}(x)$

`ctx.sin_integral(z)`

where `ctx` is `math53`, `ctxflint`.

Returns the sine integral $\mathrm{Si}(x) = \int_0^x \frac{\sin(t)}{t}\,\mathrm{d}t$, and $\mathrm{Si}(x) = -\mathrm{Si}(-x)$ for $x < 0$.

See also Wikipedia [1329], MathWorld [986], NIST [777], Ehrhardt [295] (3.4.18), Flint [768], Flint [762], Mpmath [660].

For complex z, the sine integral $\mathrm{Si}(z)$ can be computed using

$$\mathrm{Si}(z) = \frac{i}{2}\left[e^{iz}U(1,1,-iz) - e^{-iz}U(1,1,iz) + \log(-iz) - \log(iz)\right]$$

$$\mathrm{Si}(z) = z\,{}_1F_2(\tfrac{1}{2}; \tfrac{3}{2}, \tfrac{3}{2}; -\tfrac{z^2}{4})$$

and an automatic algorithm choice.

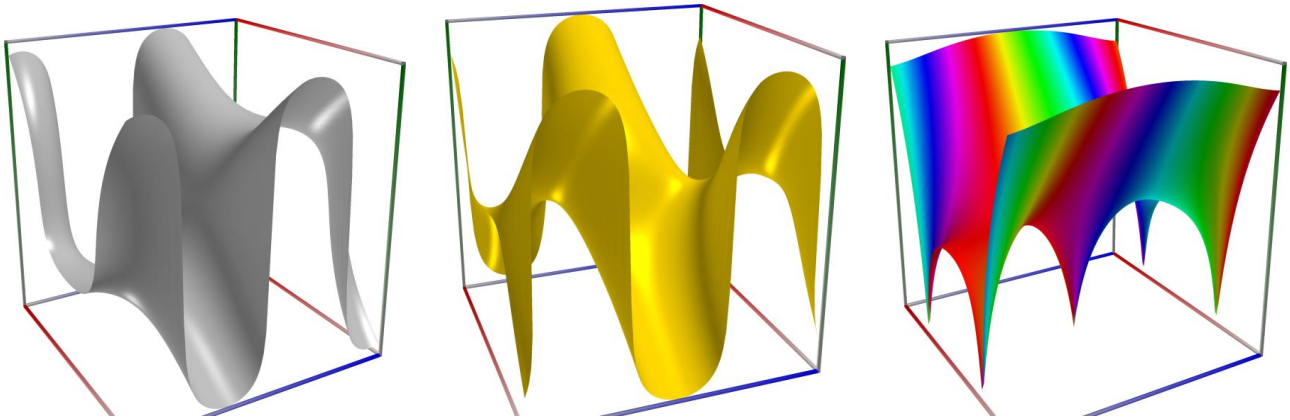

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.Si(0.5)
ereal('5.23598775598298873O7E-1')
>>> math53.Si('0.51')
ereal('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; x = 3.0
>>> \mathrm{d}x = dec.si(x); mx = mpm.si(x); gx = gmp.si(x)
>>> fx = fpm.si(x); ax = apm.si(x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  1.84865252799946825639773025111197324516 5E+0
mpm:  1.84865252799946825639773025111197324516 5e+0
gmp:  1.84865252799946825639773025111197324516 5E+00
fpm:  1.84865252799947E+00
apm:  1.84865252799946825639773025111197324516 5e+0 (6.21e-40%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; z = '3.0 + 4.0j'
>>> \mathrm{d}z = dec.si(z); mz = mpm.si(z); gz = gmp.si(z)
>>> fz = fpm.si(z); az = apm.si(z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az], aligned=True)
dec: 6.74799508140403209 27E+0              - 3.49866372113190947 06E+0j
mpm: 6.74799508140403209 27e+0              - 3.49866372113190947 06e+0j
gmp: 6.74799508140403209 27E+00             - 3.49866372113190947 06E+00j
fpm: 6.74799508140403E+00                   - 3.49866372113191E+00j
apm: 6.74799508140403209 27e+0 (1.004e-19%) - 3.49866372113190947 06e+0 (-4.842e-20%)j
```

11.5.8 Cosine integral $\mathrm{Ci}(x)$

`ctx.cos_integral(z)`

where `ctx` is `math53` or `ctxflint`.

Returns the cosine integral $\mathrm{Ci}(x) = -\int_x^\infty \frac{\cos(t)}{t}\,\mathrm{d}t = \gamma + \log(x) + \int_0^x \frac{\cos(t)-1}{t}\,\mathrm{d}t$, and $\mathrm{Ci}(x) = \mathrm{Ci}(-x)$ for $x < 0$.

For complex z, the cosine integral $\mathrm{Ci}(z)$, can be computed using

$$\mathrm{Ci}(z) = \log(z) - \frac{1}{2}\left[e^{iz}U(1,1,-iz) + e^{-iz}U(1,1,iz) + \log(-iz) + \log(iz)\right]$$

See also Wikipedia [1314], MathWorld [967], NIST [777], Ehrhardt [295] (3.4.2), Flint [768], Flint [762], Mpmath [647].

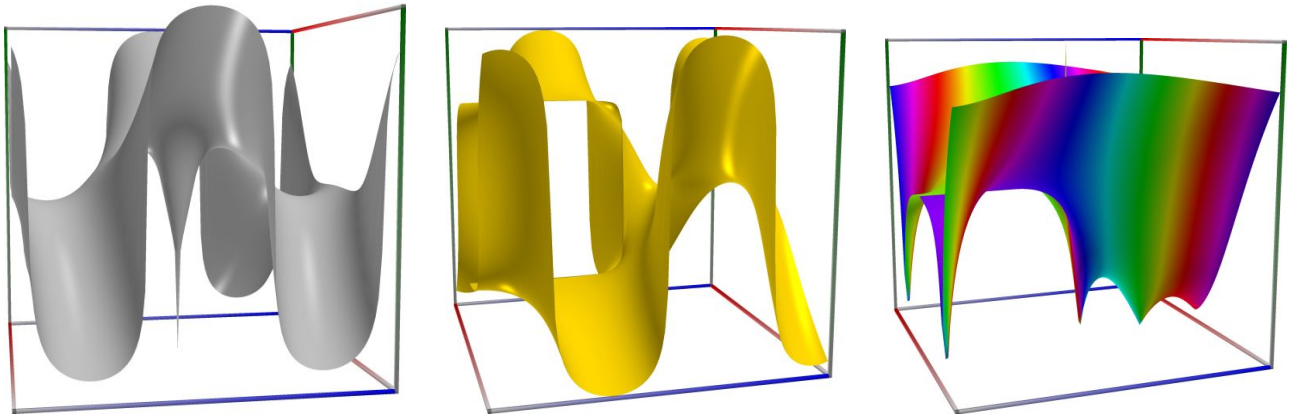

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \le x \le 6$ (blue axis), $-6 \le y \le 6$ (red axis), $-10 \le z \le 10$ (green axis). Function values are *loglog-transformed*.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.Ci(0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.Ci('0.51')
ereal('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; x = 3.0
>>> \mathrm{d}x = dec.ci(x); mx = mpm.ci(x); gx = gmp.ci(x)
>>> fx = fpm.ci(x); ax = apm.ci(x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  1.1962978600800032762647228117667785054 68E-1
mpm:  1.1962978600800032762647228117667785054 68e-1
gmp:  1.1962978600800032762647228117667785054 68E-01
fpm:  1.19629786008000E-01
apm:  1.1962978600800032762647228117667785054 68e-1 (1.799e-39%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; z = '3.0 + 4.0j'
>>> \mathrm{d}z = dec.ci(z); mz = mpm.ci(z); gz = gmp.ci(z)
>>> fz = fpm.ci(z); az = apm.ci(z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az], aligned=True)
dec: -3.4957570339825683441E+0                - 5.1759052151768084089E+0j
```

(continues on next page)

(continued from previous page)

```
mpm: -3.4957570339825683441e+0               - 5.1759052151768084089e+0j
gmp: -3.4957570339825683441E+00              - 5.1759052151768084089E+00j
fpm: -3.49575703398257E+00                   - 5.17590521517681E+00j
apm: -3.4957570339825683441e+0 (-9.692e-20%) - 5.1759052151768084089e+0 (-6.546e-20%)j
```

CHAPTER

TWELVE

HYPERGEOMETRIC FUNCTIONS ${}_2F_1$ AND ${}_1F_2$ (AND RELATED FUNCTIONS)

The source code for the C# tests in Visual Studio is divided by real and complex modules:

The source code for the C# tests in Visual Studio using real modules can be found online in the `XlCalcNet` repository or in the corresponding local `XlCalcNet` folder in the file B12a_RealHypergeometric_pFq.cs,

The source code for the C# tests in Visual Studio using complex modules can be found online in the `XlCalcNet` repository or in the corresponding local `XlCalcNet` folder in the file B12b_CplxHypergeometric_pFq.cs,

12.1 Gauss Hypergeometric Function ${}_2F_1$

12.1.1 Gauss Hypergeometric Function, ${}_2F_1(a, b; c; x)$

`ctx.hyperg_2f1`(a, b, c, x)

where `ctx` is `math53` or `ctxflint`.

Note: ctx.hyperg2F1(a, b, c, x)

Returns ${}_2F_1(a, b, c, x) = \sum_{k=0}^{\infty} \frac{(a)_k (b)_k}{(c)_k} \frac{x^k}{k!}$, the Gauss hypergeometric function, defined for $|x| < 1$.

See also Wikipedia [1254], MathWorld [892], NIST [192], Ehrhardt [295] (3.8.1), BoostMath [105], Flint [754], Flint [747], Mpmath [590].

Except for special cases it is required that $-c \neq \mathbb{N}$. For $x > 1$ the function is generally complex and not implemented in AMath; but if a or b is a non-positive integer, then ${}_2F_1(a, b, c, x)$ becomes a polynomial in x and there is no restriction on x.

Special values are ${}_2F_1(0, b, c, x) = {}_2F_1(a, 0, c, x) = {}_2F_1(a, b, c, 0) = 1$ and, if $c - a - b > 0$, ${}_2F_1(a, b, c, 1) = \frac{\Gamma(c)\Gamma(c-a-b)}{\Gamma(c-a)\Gamma(c-b)}$.

In AMath the analytic continuation is done using one or two linear transformations: For all $x < 1$ Abramowitz and Stegun. [4] equations (15.3.3-5) are used, and for $0 < x < 1$ if c and $c - a - b$ are no integers Abramowitz and Stegun. [4] equation (15.3.6). For $c = a + b \pm m, (m = 0, 1, \ldots)$ the (complicated) formulas from Abramowitz and Stegun. [4] (15.3.10-12) are implemented. If $a = -m$ is a negative integer (or b with a and b swapped, or both and $a \geq b$) the limiting cases for the (polynomial) transformations are implemented as in Abramowitz and Stegun. [4] equations (15.8.6/7).

This calls `arb_hypgeom_2f1` or `acb_hypgeom_2f1`

Returns the Gauss hypergeometric function ${}_2F_1(a, b; c; z)$.

The Gauss hypergeometric function ${}_2F_1$ is defined for $|z| < 1$ by the series

$$ {}_2F_1(a, b; c; z) = \sum_{k=0}^{\infty} \frac{(a)_k (b)_k}{(c)_k} \cdot \frac{z^k}{k!} $$

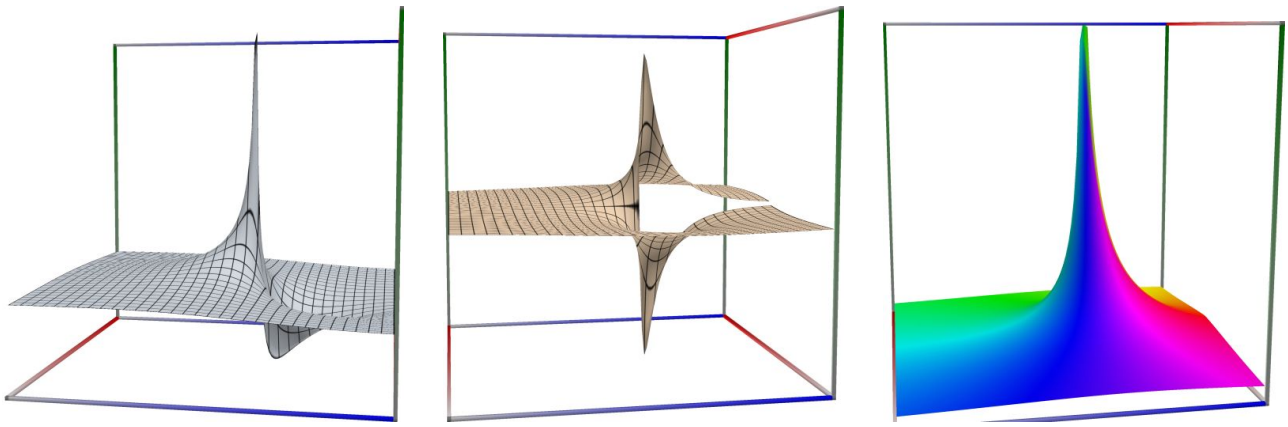

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \leq x \leq 6$ (blue axis), $-6 \leq y \leq 6$ (red axis), $-10 \leq z \leq 10$ (green axis). Function values are *loglog-transformed*.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.Hyperg2F1(3,4,5,0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.Hyperg2F1(13,14,15,0.5)
ereal('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; a = '11.0'; b = '12.0'; c = '32.0'; x = '0.3'
>>> \mathrm{d}x = dec.hyp2f1(a, b, c, x); mx = mpm.hyp2f1(a, b, c, x); gx = gmp.hyp2f1(a, b, c, x)
>>> fx = fpm.hyp2f1(a, b, c, x); ax = apm.hyp2f1(a, b, c, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  3.9275802252632065666964888447254974488 41E+0
mpm:  3.9275802252632065666964888447254974488 41e+0
gmp:  3.9275802252632065666964888447254974488 41E+00
fpm:  3.92758022526321E+00
apm:  3.9275802252632065666964888447254974488 41e+0 (2.338e-39%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; a = '11.0 + 2.0j'; b = '12.0 + 3.0j'; c = '42.0 + 3.0j';z = '3.0 + 4.0j'
>>> \mathrm{d}z = dec.hyp2f1(a, b, c, z); mz = mpm.hyp2f1(a, b, c, z); gz = gmp.hyp2f1(a, b, c, z)
>>> fz = fpm.hyp2f1(a, b, c, z); az = apm.hyp2f1(a, b, c, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az], aligned=True)
dec: -1.0355451917135984282E-3              - 1.4654778601071805787E-3j
mpm: -1.0355451917135984282e-3              - 1.4654778601071805787e-3j
gmp: -1.0355451917135984282E-03             - 1.4654778601071805787E-03j
fpm: -1.03554519171360E-03                  - 1.46547786010718E-03j
apm: -1.0355451917135951286e-3 (-1.197e-9%) - 1.4654778601071774453e-3 (-8.461e-10%)j
```

12.1.2 Regularized Hypergeometric Function, ${}_2\widetilde{F}_1(a,b;c;x)$

`ctx.hyperg_2f1r`(a, b, c, x)

where `ctx` is `math53` or `ctxflint`.

Note: ctx.hyperg2F1r(a, b, c, x)

Returns ${}_2\widetilde{F}_1(a,b;c;x) = \dfrac{1}{\Gamma(c)}{}_2F_1(a,b;c;x)$, the regularized Gauss hypergeometric function, for $c \neq 0, -1, -2, \cdots$, or, if $c = 0, -1, -2, \cdots = -m$, the corresponding limit ${}_2\widetilde{F}_1(a,b;-m;x) = \dfrac{(a)_{m+1}(b)_{m+1}}{(m+1)!}x^{m+1}{}_2F_1(a+m+1, b+m+1; m+2; x)$.

See also Wikipedia [1254], MathWorld [259], NIST [192], Ehrhardt [295] (3.8.2), BoostMath [105], Flint [754], Flint [747], Mpmath [590].

This calls `arb_hypgeom_2f1` or `acb_hypgeom_2f1` with regularized set.

Returns the regularized Gauss hypergeometric function ${}_2\widetilde{F}_1(a,b;c;z)$.

The regularized Gauss hypergeometric function ${}_2\widetilde{F}_1(a,b;c;z)$ for unrestricted c, is defined by

$$ {}_2\widetilde{F}_1(a,b;c;z) = \frac{1}{\Gamma(c)}{}_2F_1(a,b;c;z) = \boldsymbol{F}(a,b;c;z), \qquad (c \neq 0, -1, -2, \cdots) $$

and by the corresponding limit if $c = 0, -1, -2, \cdots, = -n$.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.Hyperg2F1r(3,4,5,0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.Hyperg2F1r(13,14,15,0.5)
ereal('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; a = '11.0'; b = '12.0'; c = '32.0'; x = '0.3'
>>> \mathrm{d}x = dec.hyp2f1r(a, b, c, x); mx = mpm.hyp2f1r(a, b, c, x); gx = gmp.hyp2f1r(a, b, c, x)
>>> fx = fpm.hyp2f1r(a, b, c, x); ax = apm.hyp2f1r(a, b, c, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  4.7764286646529924750101609327504609858 59E-34
mpm:  4.7764286646529924750101609327504609858 59e-34
gmp:  4.7764286646529924750101609327504609858 59E-34
fpm:  4.77642866465299E-34
apm:  4.7764286646529924750101609327504609858 59e-34 (1.851e-39%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; a = '11.0 + 2.0j'; b = '12.0 + 3.0j'; c = '42.0 + 3.0j';z = '3.0 + 4.0j'
>>> \mathrm{d}z = dec.hyp2f1r(a, b, c, z); mz = mpm.hyp2f1r(a, b, c, z); gz = gmp.hyp2f1r(a, b, c, z)
>>> fz = fpm.hyp2f1r(a, b, c, z); az = apm.hyp2f1r(a, b, c, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az], aligned=True)
dec: 4.167625725629229627 8E-53             - 4.285539071374009067 2E-53j
mpm: 4.167625725629229627 8e-53             - 4.285539071374009067 2e-53j
gmp: 4.167625725629229627 8E-53             - 4.285539071374009067 2E-53j
fpm: 4.16762572562923E-53                   - 4.28553907137401E-53j
apm: 4.167625725629221379 1e-53 (8.47e-10%) - 4.285539071373996349 4e-53 (-8.237e-10%)j
```

12.2 Chebyshev, Gegenbauer and Jacobi polynomials

12.2.1 Chebyshev polynomial (or function) of the first kind, $T_n(x)$

`ctx.chebyshev_t(`n, x`)`

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns $T_n(z) = {}_2F_1\left(-n, n, \frac{1}{2}, \frac{1-z}{2}\right)$, the Chebyshev polynomial of the first kind. The $T_n(x)$ are orthogonal on the interval $(-1, 1)$, with respect to the weight function $w(x) = (1-x^2)^{-1/2}$.

For integer n, the following recursion can be used, with $T_n(x) = T_{-n}(x)$:

$$\begin{aligned} T_0(x) &= 1 \\ T_1(x) &= x \\ T_{n+1}(x) &= 2xT_n(x) - T_{n-1}(x). \end{aligned} \tag{12.1}$$

See also Wikipedia [1294], MathWorld [911], NIST [395], BoostMath [114], Ehrhardt [295] (3.7.1), Flint [755], Flint [751], Mpmath [623], Ehrhardt [295] (3.7.5).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.ChebyshevT(3, 0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.ChebyshevT('6, 0.51')
ereal('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; n = '10'; x = '5.0'
>>> \mathrm{d}x = dec.chebyt(n, x); mx = mpm.chebyt(n, x); gx = gmp.chebyt(n, x)
>>> fx = fpm.chebyt(n, x); ax = apm.chebyt(n, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  4.5172512490000000000000000000000000000E+9
mpm:  4.5172512490000000000000000000000000000e+9
gmp:  4.5172512490000000000000000000000000000E+09
fpm:  4.51725124900000E+09
apm:  4.5172512490000000000000000000000000000e+9 (0.0%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; n = '10'; z = '5.0 + 3j'
>>> \mathrm{d}z = dec.chebyt(n, z); mz = mpm.chebyt(n, z); gz = gmp.chebyt(n, z)
>>> fz = fpm.chebyt(n, z); az = apm.chebyt(n, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: 1.5445350751000000000E+10         - 1.6336798500000000000E+10j
mpm: 1.5445350751000000000e+10         - 1.6336798500000000000e+10j
gmp: 1.5445350751000000000E+10         - 1.6336798500000000000E+10j
fpm: 1.54453507510000E+10              - 1.63367985000000E+10j
apm: 1.5445350751000000000e+10 (0.0%) - 1.6336798500000000000e+10 (0.0%)j
```

12.2.2 Chebyshev polynomial of the second kind, $U_n(x)$

`ctx.chebyshev_u(n, x)`

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns $U_n(z) = (n+1)_2F_1\left(-n, n+2, \frac{3}{2}, \frac{1-z}{2}\right)$, the Chebyshev polynomial of the second kind. The $U_n(x)$ are orthogonal on the interval $(-1, 1)$, with respect to the weight function $w(x) = (1-x^2)^{1/2}$.

For integer n, the following recursion can be used, with $U_{-1}(x) = 0$ and $U_n(x) = -U_{-n-2}(x)$:

$$\begin{aligned} U_0(x) &= 1 \\ U_1(x) &= 2x \\ U_{n+1}(x) &= 2xU_n(x) - U_{n-1}(x). \end{aligned} \tag{12.2}$$

See also Wikipedia [1294], MathWorld [912], NIST [395], Ehrhardt [295] (3.7.2), BoostMath [114], Flint [755], Flint [751], Mpmath [624].

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.ChebyshevU(3, 0.5)
ereal('5.2359877559829887307E-1')
>>> math53.ChebyshevU('6, 0.51')
ereal('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; n = '10'; x = '5.0'
>>> \mathrm{d}x = dec.chebyu(n, x); mx = mpm.chebyu(n, x); gx = gmp.chebyu(n, x)
>>> fx = fpm.chebyu(n, x); ax = apm.chebyu(n, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  9.12765149900000000000000000000000000000E+9
mpm:  9.12765149900000000000000000000000000000e+9
gmp:  9.12765149900000000000000000000000000000E+09
fpm:  9.12765149900000E+09
apm:  9.12765149900000000000000000000000000000e+9 (0.0%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; n = '10'; z = '5.0 + 3j'
>>> \mathrm{d}z = dec.chebyu(n, z); mz = mpm.chebyu(n, z); gz = gmp.chebyu(n, z)
>>> fz = fpm.chebyu(n, z); az = apm.chebyu(n, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: 3.0778307711000000000E+10        - 3.2988132600000000000E+10j
mpm: 3.0778307711000000000e+10        - 3.2988132600000000000e+10j
gmp: 3.0778307711000000000E+10        - 3.2988132600000000000E+10j
fpm: 3.07783077110000E+10             - 3.29881326000000E+10j
apm: 3.0778307711000000000e+10 (0.0%) - 3.2988132600000000000e+10 (0.0%)j
```

12.2.3 Chebyshev polynomials of the third kind, $V_n(x)$

ctx.chebyshev_v(*n*, *x*)

Returns $V_n(x)$, the Chebyshev polynomial of the first kind. The $V_n(x)$ are orthogonal on the interval $(-1, 1)$, with respect to the weight function $w(x) = (1 + x^2)^{1/2}(1 - x)^{-1/2}$.

The function can also be calculated as $V_n(x) = (-1)^n(2n + 1)_2F_1\left(-n, n + 1, \frac{3}{2}, \frac{1+x}{2}\right)$, which allows for complex n and x.

We also have $V_n(x) = \sqrt{\frac{2}{1+x}}T_{2n+1}\left(\sqrt{\frac{x+1}{2}}\right)$ for $x \geq 0$, and $V_n(x) = (-1)^n W_n(-x)$ for $x < 0$.

For integer n and real x, the following recursion can be used, with $V_{-n-1}(x) = V_n(x)$:

$$\begin{aligned} V_0(x) &= 1 \\ V_1(x) &= 2x - 1 \\ V_{n+1}(x) &= 2xV_n(x) - V_{n-1}(x). \end{aligned} \tag{12.3}$$

See also Wikipedia [1294], MathWorld [911], NIST [395], Ehrhardt [295] (3.7.3).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.ChebyshevV(3, 0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.ChebyshevV('6, 0.51')
ereal('5.351847902755998475 4E-1')
```

12.2.4 Chebyshev polynomials of the fourth kind, $W_n(x)$

`ctx.chebyshev_w(n, x)`

Returns $W_k(z)$, the Chebyshev polynomial of the fourth kind of degree $n \geq 0$. The $W_n(x)$ are orthogonal on the interval $(-1, 1)$, with respect to the weight function $w(x) = (1-x)^{1/2}(1+x^2)^{-1/2}$.

The function can also be calculated as $W_n(z) = (-1)^n {}_2F_1\left(-n, n+1, \frac{1}{2}, \frac{1+x}{2}\right)$, which allows for complex n and x.

We also have $W_n(x) = U_{2n}\left(\sqrt{\frac{x+1}{2}}\right)$ for $x \geq 0$, and $W_n(x) = (-1)^n V_n(-x)$ for $x < 0$.

For integer n, the following recursion can be used, with $W_{-n-1}(x) = -W_n(x)$:

$$\begin{aligned} W_0(x) &= 1 \\ W_1(x) &= 2x + 1 \\ W_{n+1}(x) &= 2xW_n(x) - W_{n-1}(x). \end{aligned} \tag{12.4}$$

See also Wikipedia [1294], MathWorld [911], NIST [395], Ehrhardt [295] (3.7.4).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.ChebyshevW(3, 0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.ChebyshevW('6, 0.51')
ereal('5.351847902755998475 4E-1')
```

12.2.5 Gegenbauer (ultraspherical) polynomial, $C_n^{\alpha}(x)$

`ctx.gegenbauer_c`(*n*, *alpha*, *x*)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns $C_n^{(a)}(z)$, the Gegenbauer polynomial of degree n with parameter a. The Gegenbauer polynomials are orthogonal on the interval $(-1, 1)$, with respect to the weight function $w(x) = (1 - x^2)^{a-1/2}$.

If $a \neq 0$ the function uses the recurrence formulas

$$\begin{aligned} C_0^{(a)}(x) &= 1 \\ C_1^{(a)}(x) &= 2ax \\ nC_n^{(a)}(x) &= 2(n + a - 1)xC_{n-1}^{(a)}(x) - (n + 2a - 2)C_{n-2}^{(a)}(x). \end{aligned} \tag{12.5}$$

For $a = 0$ the result can be expressed in Chebyshev polynomials: $C_0^{(0)}(x) = 1, \quad C_n^{(0)}(x) = 2/nT_n(x)$.

See also Wikipedia [1299], MathWorld [917], NIST [395], BoostMath [120], Ehrhardt [295] (3.7.6), Flint [755], Flint [751], Mpmath [625].

The function can also be expressed as

$$C_n^a(z) = \frac{(2a)_n}{\Gamma(n+1)} {}_2F_1\left(-n, 2a + n, a + \frac{1}{2}, \frac{1-z}{2}\right).$$

For nonnegative integer *n*, this is a polynomial in *a* and *z*, even when the parameters are such that the hypergeometric series is undefined. In such cases, the polynomial is evaluated using direct methods.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.GegenbauerC(3, 2, 0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.GegenbauerC('6, 2, 0.51')
ereal('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; n = '10' ; a = '7.0'; x = '5.0'
>>> \mathrm{d}x = dec.gegenbauer(n, a, x); mx = mpm.gegenbauer(n, a, x); gx = gmp.gegenbauer(n, a, x)
>>> fx = fpm.gegenbauer(n, a, x); ax = apm.gegenbauer(n, a, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  7.56589847855380000000000000000000000000E+13
mpm:  7.56589847855380000000000000000000000000e+13
gmp:  7.56589847855380000000000000000000000000E+13
fpm:  7.56589847855380E+13
apm:  7.56589847855380000000000000000000000000e+13 (2.135e-39%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; n = '10'; a = '7.0 + 1j'; z = '5.0 + 3j'
>>> \mathrm{d}z = dec.gegenbauer(n, a, z); mz = mpm.gegenbauer(n, a, z); gz = gmp.gegenbauer(n, a, z)
>>> fz = fpm.gegenbauer(n, a, z); az = apm.gegenbauer(n, a, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: 3.8222147440285373854E+14              + 3.3043282427731541887E+13j
mpm: 3.8222147440285373854e+14              + 3.3043282427731541887e+13j
gmp: 3.8222147440285373854E+14              + 3.3043282427731541887E+13j
fpm: 3.82221474402854E+14                   + 3.30432824277315E+13j
apm: 3.8222147440285373854e+14 (6.238e-20%) + 3.3043282427731541887e+13 (2.255e-19%)j
```

12.2.6 Jacobi polynomials, $P_n^{(a,b)}(x)$

`ctx.jacobi_p`(*n*, *a*, *b*, *x*)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns $P_n^{(a,b)}(x)$, the Jacobi polynomial of degree $n \geq 0$ with parameters (a, b), where a, b should be greater than -1, and $a+b$ must not be an integer less than -1. Jacobi polynomials are orthogonal on the interval $(-1, 1)$, with respect to the weight function $w(x) = (1-x)^a(1+x)^b$, if a, b are greater than -1.

The cases $n \leq 1$ are computed with the explicit formulas

$$P_0^{(a,b)} = 1, \quad 2P_1^{(a,b)} = (a-b) + (a+b+2)x,$$

and for $n > 1$ there are the somewhat complicated recurrence relations

$$\begin{aligned} P_{n+1}^{(a,b)} &= (A_n x + B_n)P_n^{(a,b)} - C_n P_{n-1}^{(a,b)} \\ A_n &= \frac{(2n+a+b+1)(2n+a+b+2)}{2(n+1)(n+a+b+1)} \\ B_n &= \frac{(a^2-b^2)(2n+a+b+1)}{2(n+1)(n+a+b+1)(2n+a+b)} \\ C_n &= \frac{(n+a)(n+b)(2n+a+b+2)}{(n+1)(n+a+b+1)(2n+a+b)}. \end{aligned} \tag{12.6}$$

See also Wikipedia [1306], MathWorld [922], NIST [395], BoostMath [123], Ehrhardt [295] (3.7.9), Mpmath [630].

The function can also be expressed as

$$P_n^{(a,b)}(x) = \frac{(a+1)_n}{\Gamma(n+1)} {}_2F_1\left(-n, n+a+b+1, a+1, \frac{1-x}{2}\right).$$

For nonnegative integer *n*, this is a polynomial in *a*, *b* and *z*, even when the parameters are such that the hypergeometric series is undefined. In such cases, the polynomial is evaluated using direct methods.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.JacobiP(2, 3, 2, 0.5)
ereal('5.2359877559829887307E-1')
>>> math53.JacobiP('6, 2, 0.51')
ereal('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; n = '10' ; a = '7.0'; b = '8.0'; x = '5.0'
>>> \mathrm{d}x = dec.jacobi(n, a, b, x); mx = mpm.jacobi(n, a, b, x); gx = gmp.jacobi(n, a, b, x)
>>> fx = fpm.jacobi(n, a, b, x); ax = apm.jacobi(n, a, b, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  1.5664928912880000000000000000000000000000E+12
mpm:  1.5664928912880000000000000000000000000000e+12
gmp:  1.5664928912880000000000000000000000000000E+12
fpm:  1.56649289128800E+12
apm:  1.5664928912880000000000000000000000000000e+12 (1.611e-39%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; n = '10'; a = '7.0 + 1j'; b = '8.0 + 2j'; z = '5.0 + 3j'
>>> \mathrm{d}z = dec.jacobi(n, a, b, z); mz = mpm.jacobi(n, a, b, z); gz = gmp.jacobi(n, a, b, z)
>>> fz = fpm.jacobi(n, a, b, z); az = apm.jacobi(n, a, b, z)
```

(continues on next page)

(continued from previous page)

```
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: 7.8001821589253876064E+12               + 1.0625055373536412146E+12j
mpm: 7.8001821589253876064e+12               + 1.0625055373536412146e+12j
gmp: 7.8001821589253876064E+12               + 1.0625055373536412146E+12j
fpm: 7.80018215892539E+12                    + 1.06250553735364E+12j
apm: 7.8001821589253876064e+12 (4.776e-20%) + 1.0625055373536412146e+12 (1.315e-19%)j
```

12.2.7 Zernike radial polynomials $R_n^m(r)$

`ctx.zernike_r(n, m, r)`

Returns the Zernike radial polynomial $R_n^m(r)$, with $r \geq 0$, and $n \geq m \geq 0$, $n - m$ even, zero otherwise. The orthogonality relation is

$$\int_0^1 R_n^m(r) R_{n'}^m(r) r \, \mathrm{d}r = \frac{1}{2(n+1)} \delta_{nn'}.$$

$$R_n^m(r) = (-1)^{(n-m)/2} r^m P_{(n-m)/2}^{(m,0)}(1-2r^2) = r^m P_{(n-m)/2}^{(0,m)}(2r^2-1).$$

See also: http://mathworld.wolfram.com/ZernikePolynomial.html

See also https://en.wikipedia.org/wiki/Zernike_polynomials

See also Ehrhardt [295] (3.7.20).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.ZernikeR(4, 5, 0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.ZernikeR(4, 5,'0.51')
ereal('5.351847902755998475 4E-1')
```

12.3 Legendre polynomials and related

12.3.1 Legendre polynomial (or function) of the first kind, $P_n(x)$

`ctx.legendre_p(n, x)`

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns $P_n(x) = {}_2F_1\left(-n, n+1, 1, \frac{1-x}{2}\right)$, the Legendre polynomial of degree n. The Legendre polynomials are orthogonal on the interval $(-1, 1)$ with $w(x) = 1$. If $n \geq 0$ the function uses the following recurrence relation, with $P_n(x) = P_{-n-1}(x)$:

$$\begin{aligned} P_0(x) &= 1 \\ P_1(x) &= x \\ (n+1)P_{n+1}(x) &= (2n+1)P_n(x) - nP_{n-1}(x). \end{aligned} \tag{12.7}$$

See also Wikipedia [1308], MathWorld [925], NIST [291], BoostMath [125], Ehrhardt [295] (3.7.13), Flint [755], Flint [751], Mpmath [632].

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.LegendreP(3, 0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.LegendreP(6, '0.51')
ereal('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; n = '10'; x = '5.0'
>>> \mathrm{d}x = dec.legendre(n, x); mx = mpm.legendre(n, x); gx = gmp.legendre(n, x)
>>> fx = fpm.legendre(n, x); ax = apm.legendre(n, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  1.6004726770000000000000000000000000000E+9
mpm:  1.6004726770000000000000000000000000000e+9
gmp:  1.6004726770000000000000000000000000000E+09
fpm:  1.60047267700000E+09
apm:  1.6004726770000000000000000000000000000e+9 (1.54e-39%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; n = '10'; z = '5.0 + 3j'
>>> \mathrm{d}z = dec.legendre(n, z); mz = mpm.legendre(n, z); gz = gmp.legendre(n, z)
>>> fz = fpm.legendre(n, z); az = apm.legendre(n, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: 5.4324745448476562500E+9        - 5.7861538517578125000E+9j
mpm: 5.432474544847656250 0e+9       - 5.7861538517578125000e+9j
gmp: 5.4324745448476562500E+09       - 5.7861538517578125000E+09j
fpm: 5.43247454484766E+09            - 5.78615385175781E+09j
apm: 5.432474544847656250 0e+9 (0.0%) - 5.7861538517578125000e+9 (0.0%)j
```

12.3.2 Associated Legendre function of the first kind, $P_l^m(x)$

`ctx.legendre_plm`(l, m, x)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns $\frac{1}{\Gamma(1-m)} \frac{(1+z)^{m/2}}{(1-z)^{m/2}} {}_2F_1\left(-n, n+1, 1-m, \frac{1-z}{2}\right)$., the (associated) Legendre function of the first kind of degree n and order m. Taking $m = 0$ gives the ordinary Legendre function of the first kind, $P_n(z)$.

See also Wikipedia [1290], MathWorld [924], NIST [291], BoostMath [125], Ehrhardt [295] (3.7.14), Flint [755], Flint [751], Mpmath [620].

Many different branch cut conventions appear in the literature. If *type* is 0, the version

$$P_n^m(z) = \frac{(1+z)^{m/2}}{(1-z)^{m/2}} \mathbf{F}\left(-n, n+1, 1-m, \frac{1-z}{2}\right)$$

is computed, and if *type* is 1, the alternative version

$$\mathcal{P}_n^m(z) = \frac{(z+1)^{m/2}}{(z-1)^{m/2}} \mathbf{F}\left(-n, n+1, 1-m, \frac{1-z}{2}\right).$$

is computed. Type 0 and type 1 respectively correspond to type 2 and type 3 in *Mathematica* and *mpmath*.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.LegendrePlm(2, 3, 0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.LegendrePlm(2, 6, '0.51')
ereal('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; n = '10'; m = '7'; x = '0.5'
>>> \mathrm{d}x = dec.legenp(n, m, x); mx = mpm.legenp(n, m, x); gx = gmp.legenp(n, m, x)
>>> fx = fpm.legenp(n, m, x); ax = apm.legenp(n, m, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  -1.836027792321961447325321009149754756328E+6
mpm:  -1.836027792321961447325321009149754756328e+6
gmp:  -1.836027792321961447325321009149754756328E+06
fpm:  -1.83602779232196E+06
apm:  -1.836027792321961447325321009149754756328e+6 (-6.556e-40%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; n = '10 + 0j'; m = '7 + 1j'; z = '5.0 + 3j'
>>> \mathrm{d}z = dec.legenp(n, m, z); mz = mpm.legenp(n, m, z); gz = gmp.legenp(n, m, z)
>>> fz = fpm.legenp(n, m, z); az = apm.legenp(n, m, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: 5.1676243722757488933E+14              - 9.9095186680298524778E+14j
mpm: 5.1676243722757488933e+14              - 9.9095186680298524778e+14j
gmp: 5.1676243722757488933E+14              - 9.9095186680298524778E+14j
fpm: 5.16762437227575E+14                   - 9.90951866802985E+14j
apm: 5.1676243722757488933e+14 (2.768e-19%) - 9.9095186680298524778e+14 (-1.925e-19%)j
```

12.3.3 Legendre function of the second kind, $Q_l(x)$

`ctx.legendre_q`(l, x)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

See also: https://en.wikipedia.org/wiki/Legendre_polynomials

Returns $Q_n(x) = {}_2F_1\left(\frac{l+1}{2}, \frac{l+2}{2}; l+\frac{3}{2}; \frac{1}{x^2}\right)$, the Legendre function of the second kind of degree l. For integer $l \geq 0$ and $x \neq 1$, the following recurrence relations hold:

$$\begin{aligned} Q_0(x) &= \frac{1}{2}\log\left(\frac{1+x}{1-x}\right) \\ Q_1(x) &= \frac{x}{2}\log\left(\frac{1+x}{1-x}\right) - 1 \\ (k+1)Q_{k+1}(x) &= (2k+1)Q_k(x) - kQ_{k-1}(x). \end{aligned} \tag{12.8}$$

See also Wikipedia [1308], MathWorld [925], NIST [291], BoostMath [125], Ehrhardt [295] (3.7.15), Flint [755], Flint [751], Mpmath [621].

This function returns $Q_l^m(x)$, the associated Legendre functions of the second kind with $l \geq 0$, $l+m \geq 0$ and $x \neq 1$, defined as

$$Q_l^m(x) = (-1)^m(1-x^2)^{m/2}\frac{d^m}{\mathrm{d}x^m}Q_l(x), \quad |x| < 1,$$

$$Q_l^m(x) = (x^2-1)^{m/2}\frac{d^m}{\mathrm{d}x^m}Q_l(x), \quad |x| > 1.$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.LegendreQ(3, 0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.LegendreQ(6, '0.51')
ereal('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; n = '10'; m = '7'; x = '0.5'
>>> \mathrm{d}x = dec.legenq(n, m, x); mx = mpm.legenq(n, m, x); gx = gmp.legenq(n, m, x)
>>> fx = fpm.legenq(n, m, x); ax = apm.legenq(n, m, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  2.7166514096600372340949867833336728254923E+6
mpm:  2.7166514096600372340949867833336728254923e+6
gmp:  2.7166514096600372340949867833336728254923E+06
fpm:  2.71665140966004E+06
apm:  2.7166514096600372340949867833336728254923e+6 (3.811e-38%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; n = '10 + 0j'; m = '7 + 1j'; z = '5.0 + 3j'
>>> \mathrm{d}z = dec.legenq(n, m, z); mz = mpm.legenq(n, m, z); gz = gmp.legenq(n, m, z)
>>> fz = fpm.legenq(n, m, z); az = apm.legenq(n, m, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: 1.5565835524046748818E+15              + 8.1172853822265297587E+14j
mpm: 1.5565835524046748818e+15              + 8.1172853822265297587e+14j
gmp: 1.5565835524046748818E+15              + 8.1172853822265297587E+14j
fpm: 1.55658355240468E+15                   + 8.11728538222653E+14j
apm: 1.5565835524046748818e+15 (9.619e-18%) + 8.1172853822265297586e+14 (1.78e-17%)j
```

12.3.4 Associated Legendre function of the second kind, $Q_l^m(x)$

`ctx.legendre_qlm`(l, m, x)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

For generalization to hypergeometric functions, see https://en.wikipedia.org/wiki/Legendre_function#Solutions_of_the_differential_equation

and https://en.wikipedia.org/wiki/Associated_Legendre_polynomials#Generalization_via_hypergeometric_functions

Returns $Q_l^m(z) = \frac{\pi}{2\sin(\pi m)}\left(\cos(\pi m)P_l^m(z) - \frac{\Gamma(1+m+l)}{\Gamma(1-m+l)}P_l^{-m}(z)\right)$, the (associated) Legendre function of the second kind of degree l and order m.

Here $P_l^m(z)$ is the Legendre function of the first kind of degree l and order m. The formula above should be understood as limit when m is an integer. Taking $m = 0$ gives the ordinary Legendre function of the second kind, $Q_n(z)$.

A different formula from Wikipedia:

$$Q_\lambda^\mu(z) = \frac{\sqrt{\pi}\,\Gamma(\lambda+\mu+1)}{2^{\lambda+1}\Gamma(\lambda+3/2)}\frac{1}{z^{\lambda+\mu+1}}(1-z^2)^{\mu/2}\,{}_2F_1\left(\frac{\lambda+\mu+1}{2}, \frac{\lambda+\mu+2}{2}; \lambda+\frac{3}{2}; \frac{1}{z^2}\right)$$

For integer m, $l \geq 0$, $l + m \geq 0$ and $x \neq 1$, the function can be defined by

$$Q_l^m(x) = (-1)^m(1-x^2)^{m/2}\frac{d^m}{dx^m}Q_l(x),$$

$$Q_l^{-m}(x) = (x^2-1)^{m/2}\frac{(l-m)!}{(l+m)!}Q_l^m(x).$$

The factor $(-1)^m$ is omitted if $|x| > 1$, see NIST [291] (14.9.14).

See also Wikipedia [1308], MathWorld [925], NIST [291], BoostMath [125], Ehrhardt [295] (3.7.16), Mpmath [621].

Sets *res* to the associated Legendre function of the second kind evaluated for degree *n*, order *m*, and argument *z*. When *m* is zero, this reduces to the Legendre function $Q_n(z)$.

Many different branch cut conventions appear in the literature. If *type* is 0, the version

$$Q_n^m(z) = \frac{\pi}{2\sin(\pi m)}\left(\cos(\pi m)P_n^m(z) - \frac{\Gamma(1+m+n)}{\Gamma(1-m+n)}P_n^{-m}(z)\right)$$

is computed, and if *type* is 1, the alternative version

$$\mathcal{Q}_n^m(z) = \frac{\pi}{2\sin(\pi m)}e^{\pi i m}\left(\mathcal{P}_n^m(z) - \frac{\Gamma(1+m+n)}{\Gamma(1-m+n)}\mathcal{P}_n^{-m}(z)\right)$$

is computed. Type 0 and type 1 respectively correspond to type 2 and type 3 in *Mathematica* and *mpmath*.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.LegendrePlm(2, 3, 0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.LegendrePlm(2, 6, '0.51')
ereal('5.351847902755998475 4E-1')
```

12.3.5 Spherical harmonics, $Y_n^m(\theta, \phi)$

`ctx.spherical_harmonic`(*theta*, *phi*, *n*, *m*)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Note: ctx.spherHarm(theta, phi, n, m), ctxboost.SphericalHarmonicR(theta, phi, n, m), ctxboost.SphericalHarmonicI(theta, phi, n, m)

!!! n and m need to be integer !!!

Returns $Y_l^m(\theta, \phi) = \sqrt{\frac{2l+1}{4\pi}\frac{(l-m)!}{(l+m)!}} P_l^m(\cos\theta) e^{im\phi}$ the spherical harmonic, where $P_l^m(z)$ is the Legendre function of the first kind of degree l and order m, $\theta \in [0, \pi]$ denotes the polar coordinate (ranging from the north pole to the south pole) and $\phi \in [0, 2\pi]$ denotes the azimuthal coordinate on a sphere. Care should be used since many different conventions for spherical coordinate variables are used.

See also Wikipedia [1311], MathWorld [930], NIST [292], BoostMath [130], Ehrhardt [295] (3.7.17), Flint [751], Mpmath [633].

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.SpherHarm(2, 3, 5, 4)
ereal('5.2359877559829887307E-1')
>>> math53.SpherHarm(2.1, 3.1, 5.1, 4.1)
ereal('5.3518479027559984754E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; l = '10'; m = '7'; theta = '0.1'; phi = '0.2'
>>> \mathrm{d}x = dec.spherharm(l, m, theta, phi); mx = mpm.spherharm(l, m, theta, phi);
>>> gx = gmp.spherharm(l, m, theta, phi)
>>> fx = fpm.spherharm(l, m, theta, phi); ax = apm.spherharm(l, m, theta, phi)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax], aligned=True)
dec: -2.5484347403024134998E-7                - 1.4775528280770230150E-6j
mpm: -2.5484347403024134998e-7                - 1.4775528280770230150e-6j
gmp: -2.5484347403024134998E-07               - 1.4775528280770230150E-06j
fpm: -2.54843474030241E-07                    - 1.47755282807702E-06j
apm: -2.5484347403024134998e-7 (-9.509e-19%) - 1.4775528280770230150e-6 (-4.92e-19%)j
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; n = '10'; m = '7'; theta = '0.1 + 03j'; phi = '0.2 + 04j'
>>> \mathrm{d}z = dec.spherharm(l, m, theta, phi); mz = mpm.spherharm(l, m, theta, phi);
>>> gz = gmp.spherharm(l, m, theta, phi)
>>> fz = fpm.spherharm(l, m, theta, phi); az = apm.spherharm(l, m, theta, phi)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: -5.0629719914753183582E-2                + 1.2051935898383241506E-1j
mpm: -5.0629719914753183582e-2                + 1.2051935898383241506e-1j
gmp: -5.0629719914753183582E-02               + 1.2051935898383241506E-01j
fpm: -5.06297199147532E-02                    + 1.20519358983832E-01j
apm: -5.0629719914753183582e-2 (-6.797e-19%) + 1.2051935898383241506e-1 (3.075e-19%)j
```

12.3.6 Toroidal harmonics $P^m_{l-1/2}(x)$

`ctx.toroidal_plm`(*l*, *m*, *x*)

Returns the toroidal harmonic $P^m_{l-1/2}(x)$, which is an associated Legendre function $P_l^m(x)$ of the first kind with half-integer degree. The current implementation is based on Amath and is restricted to $l, m = 0, 1; x > 1$, using Legendre elliptic integrals or Bulirsch elliptic integrals for numerical evaluation.

See also: https://mathworld.wolfram.com/ToroidalFunction.html

See also: https://dlmf.nist.gov/14.19

See also: Ehrhardt [295] (3.7.18).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.ToroidalPlm(0, 0, 1.5)
ereal('5.2359877559829887307E-1')
>>> math53.ToroidalPlm(0, 1, 1.5)
ereal('5.3518479027559984754E-1')
>>> math53.ToroidalPlm(1, 0, 1.5)
ereal('5.2359877559829887307E-1')
>>> math53.ToroidalPlm(1, 1, 1.5)
ereal('5.3518479027559984754E-1')
```

12.3.7 Toroidal harmonics $Q^m_{l-1/2}(x)$

`ctx.toroidal_qlm`(l, m, x)

Returns the toroidal harmonic $Q^m_{l-1/2}(x)$, which is an associated Legendre function $Q^m_l(x)$ of the second kind with half-integer degree. The current implementation is based on Amath and is restricted to $l, m = 0, 1; x > 1$, using Legendre elliptic integrals or Bulirsch elliptic integrals for numerical evaluation.

See also: Majic (2019), https://mathworld.wolfram.com/ToroidalFunction.html

See also: Ehrhardt [295] (3.7.18).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.ToroidalQlm(0, 0, 1.5)
ereal('5.2359877559829887307E-1')
>>> math53.ToroidalQlm(0, 1, 1.5)
ereal('5.3518479027559984754E-1')
>>> math53.ToroidalQlm(1, 0, 1.5)
ereal('5.2359877559829887307E-1')
>>> math53.ToroidalQlm(1, 1, 1.5)
ereal('5.3518479027559984754E-1')
```

12.4 Incomplete beta functions

12.4.1 Non-normalized lower incomplete beta function, $B_{\text{lower}}(a, b; x)$

`ctx.beta_lower`(a, b, x)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Note: ctx.beta3(a, b, x), ctxboost.IBetaNonNormalized(a, b, x)

Returns the non-normalized incomplete beta function $B_x(a, b) = B_{\text{lower}}(a, b; x) = \int_0^x t^{a-1}(1-t)^{b-1}\,\mathrm{d}t$, for $a > 0$, $b > 0$, and $0 \le x \le 1$.

We also have $B_{\text{lower}}(a, b; x) = \frac{x^a}{a}{}_2F_1(a, 1-b, a+1, x)$

The function is undefined for nonpositive integer a.

See also Wikipedia [1217], MathWorld [843], NIST [456], BoostMath [79], BoostMath [87], Ehrhardt [295] (3.5.3.4).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.Beta3(3.1, 0.5, 0.3)
ereal('5.2359877559829887307E-1')
>>> math53.Beta3(3.4, '0.51', 0.3)
ereal('5.3518479027559984754E-1')
```

12.4.2 Normalized incomplete beta function, $I_x(a, b)$

`ctx.ibeta`(a, b, x)

where `ctx` is `math53`, `ctxboost`, `ctxflint`.

Returns the normalized incomplete beta function $I_x(a,b) = \dfrac{1}{B(a,b)} \displaystyle\int_0^x t^{a-1}(1-t)^{b-1}\,\mathrm{d}t,$ for $a > 0$, $b > 0$, and $0 \le x \le 1$.

See also Wikipedia [1217], MathWorld [850], NIST [456], BoostMath [79], BoostMath [87], Ehrhardt [295] (3.5.3.3), Flint [737], Flint [727].

Returns the normalised incomplete beta function $I_x(a,b)$ for $a > 0$, $b > 0$, and $0 \le x \le 1$.

$$I_x(a,b) = \frac{B_x(a,b)}{B(a,b)}, \quad B_x(a,b) = \int_0^x t^{a-1}(1-t)^{b-1}\mathrm{d}t.$$

There are some special cases

$$I_0(a,b) = 0, \quad I_1(a,b) = 1, \quad I_x(a,1) = x^a,$$

and the symmetry relation $I_x(a,b) = 1 - I_{1-x}(b,a)$, which is used for $x > a/(a+b)$.

Computes the (lower) incomplete beta function, defined by $B(a,b;z) = \int_0^z t^{a-1}(1-t)^{b-1}$, optionally the regularized incomplete beta function $I(a,b;z) = B(a,b;z)/B(a,b;1)$.

In general, the integral must be interpreted using analytic continuation. The precise definitions for all parameter values are

$$B(a,b;z) = \frac{z^a}{a}{}_2F_1(a, 1-b, a+1, z)$$

$$I(a,b;z) = \frac{\Gamma(a+b)}{\Gamma(b)} z^a {}_2\widetilde{F}_1(a, 1-b, a+1, z).$$

Note that both functions with this definition are undefined for nonpositive integer a, and I is undefined for nonpositive integer $a+b$.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.IBeta(3.1, 0.5, 0.3)
ereal('5.2359877559829887307E-1')
>>> math53.IBeta(3.4, '0.51', 0.3)
ereal('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; a = '10'; b = '7'; x = '0.1'
>>> \mathrm{d}x = dec.ibeta(a, b, x); mx = mpm.ibeta(a, b, x); gx = gmp.ibeta(a, b, x)
>>> fx = fpm.ibeta(a, b, x); ax = apm.ibeta(a, b, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax], aligned=True)
dec: 4.52606468500000000000000000000000000000E-7
mpm: 4.52606468500000000000000000000000000000e-7
gmp: 4.52606468500000000000000000000000000000E-07
fpm: 4.52606468500001E-07
apm: 4.52606468500000000000000000000000000000e-7 (9.07e-39%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; a = '10 + 0j'; b = '7 + 1j'; z = '0.1 + 03j'
>>> \mathrm{d}z = dec.ibeta(a, b, z); mz = mpm.ibeta(a, b, z); gz = gmp.ibeta(a, b, z)
>>> fz = fpm.ibeta(a, b, z); az = apm.ibeta(a, b, z)
```

(continues on next page)

(continued from previous page)

```
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: -9.8493766176109694014E+11                - 4.27248355641058190 32E+11j
mpm: -9.8493766176109694014e+11                - 4.27248355641058190 32e+11j
gmp: -9.8493766176109694014E+11                - 4.27248355641058190 32E+11j
fpm: -9.84937661761097E+11                     - 4.27248355641058E+11j
apm: -9.8493766176109694013e+11 (-4.728e-19%) - 4.27248355641058190 32e+11 (-1.199e-18%)j
```

12.4.3 Derivative of the incomplete beta function

`ctx.`**`ibeta_prime`**(a, b, x)

where `ctx` is `math53`, `ctxcpp`, `ctxboost` or `ctxflint`.

Returns the partial derivative with respect to x of the incomplete beta function $I_x(a, b)$. See also BoostMath [72]. The function is defined as:

$$\frac{\partial}{\partial x} I_x(a, b) = \frac{x^{a-1}(1-x)^{b-1}}{B(a, b)}.$$

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; a = '8.3'; b = '10.4'; x = '0.7'
>>> \mathrm{d}x = dec.beta_derivative(a, b, x); mx = mpm.beta_derivative(a, b, x)
>>> ix = ipm.beta_derivative(a, b, x); fx = fpm.beta_derivative(a, b, x)
>>> gx = gmp.beta_derivative(a, b, x); ax = apm.beta_derivative(a, b, x)
>>> mpm.show([\mathrm{d}x, mx, ix, fx, gx, ax])
dec:  2.878999879544799566557091075303033672075E-1
mpm:  2.878999879544799566557091075303033672075e-1
ipm:  2.878999879544799566557091075303033672074e-1 (1.396e-37%)
fpm:  2.87899987954481E-01
gmp:  2.878999879544799566557091075303033672076E-01
apm:  2.878999879544799566557091075303033672074e-1 (3.01e-37%)
```

12.4.4 Real non-normalized upper incomplete beta function, $B_{\text{upper}}(a, b; x)$

`ctx.beta_upper`(a, b, x)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Note: ctx.betac(a, b, x), ctxboost.IBetacNonNormalized(a, b, x)

Returns the non-normalized incomplete beta function $B_{1-x}(a, b) = B_{\text{upper}}(a, b; x) = \int_x^1 t^{a-1}(1-t)^{b-1}\,\mathrm{d}t$, for $a > 0$, $b > 0$, and $0 \leq x \leq 1$.

This can be generalized to complex a, b and x as $B_{\text{upper}}(a, b; x) = B(a, b) - B_x(a, b)$.

See also Wikipedia [1217], MathWorld [843], NIST [456], BoostMath [79], BoostMath [87].

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.Betac(3.1, 0.5, 0.3)
ereal('5.2359877559829887307E-1')
>>> math53.Betac(3.4, '0.51', 0.3)
ereal('5.351847902755998475 4E-1')
```

12.4.5 Real normalized complementory incomplete beta function, $I_{1-x}(a, b)$

`ctx.ibetac`(a, b, x)

where `ctx` is `math53`, `ctxboost` or `ctxflint`.

Returns the complement of the normalized incomplete beta function $1 - I_x(a, b) = \dfrac{1}{B(a, b)} \displaystyle\int_x^1 t^{a-1}(1-t)^{b-1}\,\mathrm{d}t$, for $a > 0$, $b > 0$, and $0 \le x \le 1$.

See also Wikipedia [1217], MathWorld [850], NIST [456], BoostMath [79], BoostMath [87], Flint [737], Flint [727].

Returns the non-normalised incomplete beta function $I_x(a, b)$ for $a > 0$, $b > 0$, and $0 \le x \le 1$:

$$I_x(a, b) = \frac{B_x(a, b)}{B(a, b)}, \quad B_x(a, b) = \int_0^x t^{a-1}(1-t)^{b-1}\mathrm{d}t.$$

$$B_x(a, b) = \int_0^x t^{a-1}(1-t)^{b-1}\mathrm{d}t.$$

There are some special cases

$$B_0(a, b) = 0, \quad B_1(a, b) = B(a, b), \quad B_x(a, 1) = \frac{x^a}{a}, \quad B_x(1, b) = \frac{1-(1-x)^b}{b},$$

and the relation $B_{1-x}(a, b) = B(a, b) - B_x(b, a)$, which is used if $x > a/(a + b)$. When $a \le 0$ or $b \le 0$, the Gauss hypergeometric function ${}_2F_2(\cdot)$ is applied: If $a \ne 0$ is not a negative integer, the result is

$$B_x(a, b) = \frac{x^a}{a}{}_2F_2(a, 1-b, a+1, x), \quad -a \notin \mathbb{N}$$

else if $b \ne 0$ is not a negative integer, the result is

$$B_x(a, b) = B(a, b) - \frac{(1-x)^b x^a}{b}{}_2F_2(1, a+b, b+1, 1-x), \quad -b \notin \mathbb{N}.$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.Ibetac(3.1, 0.5, 0.3)
ereal('5.2359877559829887307E-1')
>>> math53.Ibetac(3.4, '0.51', 0.3)
ereal('5.3518479027559984754E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; a = '10'; b = '7'; x = '0.1'
>>> \mathrm{d}x = dec.beta3(a, b, x); mx = mpm.beta3(a, b, x); gx = gmp.beta3(a, b, x)
>>> fx = fpm.beta3(a, b, x); ax = apm.beta3(a, b, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax], aligned=True)
dec: 5.651928927322677322677322677322677322677E-12
mpm: 5.651928927322677322677322677322677322677e-12
gmp: 5.651928927322677322677322677322677322677E-12
fpm: 5.65192892732268E-12
apm: 5.651928927322677322677322677322677322677e-12 (8.867e-39%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; a = '10 + 0j'; b = '7 + 1j'; z = '0.1 + 03j'
>>> \mathrm{d}z = dec.beta3(a, b, z); mz = mpm.beta3(a, b, z); gz = gmp.beta3(a, b, z)
>>> fz = fpm.beta3(a, b, z); az = apm.beta3(a, b, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
```

(continues on next page)

(continued from previous page)

```
dec: -1.1121024734248714310E+7               + 6.3403283967816369421E+6j
mpm: -1.1121024734248714310e+7               + 6.3403283967816369421e+6j
gmp: -1.1121024734248714310E+07              + 6.3403283967816369421E+06j
fpm: -1.11210247342487E+07                   + 6.34032839678164E+06j
apm: -1.1121024734248714310e+7 (-4.472e-19%) + 6.3403283967816369421e+6 (5.603e-19%)j
```

12.4.6 Inverse of the real normalised incomplete beta function

`ctx.`**`ibeta_inv`**(a, b, q)

where `ctx` is `math53`, `ctxcpp`, `ctxboost` or `ctxflint`.

Returns the inverse of the normalised incomplete beta function. Calculates x with $Q(a, x) = p$. The input parameters are $a > 0, b > 0, p \geq 0$.

See also Wikipedia [1217], MathWorld [850], NIST [456], BoostMath [79], BoostMath [87], Ehrhardt [295] (3.5.3.5).

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; a = '8.3'; b = '10.4'; prob = '0.7'
>>> \mathrm{d}x = dec.ibeta_inv(a, b, prob); mx = mpm.ibeta_inv(a, b, prob)
>>> ix = ipm.ibeta_inv(a, b, prob); fx = fpm.ibeta_inv(a, b, prob)
>>> gx = gmp.ibeta_inv(a, b, prob); ax = apm.ibeta_inv(a, b, prob)
>>> mpm.show([\mathrm{d}x, mx, ix, fx, gx, ax])
dec:  5.031911971011064339721270139988401063680E-1
mpm:  5.031911971011064339721270139988401063680e-1
ipm:  5.031911971011064339721270139988401063680e-1 (1.141e-39%)
fpm:  5.03191197101107E-01
gmp:  5.031911971011064339721270139988401063680E-01
apm:  5.031911971011064339721270139988401063680e-1 (1.141e-39%)

>>> fx = fpm.ibeta_inv(a, b, prob); mpm.show([fx]) # boost
fpm:  5.03191197101107E-01
>>> fx = fpm.ibeta(a, b, fx); mpm.show([fx]) # boost
fpm:  7.00000000000000E-01
```

12.4.7 Inverse of the real normalised complementary incomplete beta function

`ctx.`**`ibetac_inv`**(a, b, q)

where `ctx` is `math53`, `ctxcpp`, `ctxboost` or `ctxflint`.

Returns the functional inverse of the complement of the upper normalized incomplete beta function. Calculates x with $I_{1-x}(a, b) = p$. The input parameters are $a > 0, b > 0, p \geq 0, \leq 1$.

See also BoostMath [87], Wikipedia [1217], MathWorld [257], NIST [456].

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; a = '8.3'; b = '10.4'; prob = '0.7'
>>> \mathrm{d}x = dec.ibetac_inv(a, b, prob); mx = mpm.ibetac_inv(a, b, prob)
>>> ix = ipm.ibetac_inv(a, b, prob); fx = fpm.ibetac_inv(a, b, prob)
>>> gx = gmp.ibetac_inv(a, b, prob); ax = apm.ibetac_inv(a, b, prob)
>>> mpm.show([\mathrm{d}x, mx, ix, fx, gx, ax])
dec:  3.81597461556170969245992999159160038768 8E-1
mpm:  3.81597461556170969245992999159160038768 8e-1
ipm:  3.81597461556170969245992999159160038768 8e-1 (7.521e-40%)
fpm:  3.81597461556171E-01
gmp:  3.81597461556170969245992999159160038768 8E-01
apm:  3.81597461556170969245992999159160038768 8e-1 (7.521e-40%)

>>> fx = fpm.ibetac_inv(a, b, prob); mpm.show([fx]) # boost
fpm:  3.81597461556171E-01
>>> fx = fpm.ibetac(a, b, fx); mpm.show([fx]) # boost
fpm:  7.00000000000000E-01
```

12.4.8 Inverse (on parameter a) of the real normalised incomplete beta function

`ctx.`**`ibeta_inva`**(b, x, q)

where `ctx` is `math53`, `ctxcpp`, `ctxboost` or `ctxflint`.

Returns the inverse of the normalized incomplete beta function with regard to parameter a, i.e. calculates a with $I_x(a, b) = p$. The input parameters are $x > 0$, $b > 0$, $p \geq 0, \leq 1$.

See also BoostMath [87], Wikipedia [1217], MathWorld [257], NIST [456].

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; x = '0.3'; b = '10.4'; prob = '0.7'
>>> \mathrm{d}x = dec.ibeta_inva(b, x, prob); mx = mpm.ibeta_inva(b, x, prob)
>>> ix = ipm.ibeta_inva(b, x, prob); fx = fpm.ibeta_inva(b, x, prob)
>>> gx = gmp.ibeta_inva(b, x, prob); ax = apm.ibeta_inva(b, x, prob)
>>> mpm.show([\mathrm{d}x, mx, ix, fx, gx, ax])
dec:  3.4347646295887250330181755040122630604 47E+0
mpm:  3.4347646295887250330181755040122630604 47e+0
ipm:  3.4347646295887250330181755040122630604 47e+0 (6.684e-40%)
fpm:  3.43476462958872E+00
gmp:  3.4347646295887250330181755040122630604 47E+00
apm:  3.4347646295887250330181755040122630604 47e+0 (6.684e-40%)

>>> fxa = fpm.ibeta_inva(b, x, prob); mpm.show([fxa]) # boost
fpm:  3.43476462958872E+00
>>> fx = fpm.ibeta(fxa, b, x); mpm.show([fx]) # boost
fpm:  7.00000000000000E-01
```

12.4.9 Inverse (on parameter a) of the real normalised complementary incomplete beta function

`ctx.ibetac_inva`(b, x, q)

where `ctx` is `math53`, `ctxcpp`, `ctxboost` or `ctxflint`.

Returns the inverse of the complement of the normalized incomplete beta function with regard to parameter a, i.e. calculates a with $I_{1-x}(a, b) = p$. The input parameters are $x > 0$, $b > 0$, $p \geq 0, \leq 1$.

See also BoostMath [87], Wikipedia [1217], MathWorld [257], NIST [456].

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; x = '0.3'; b = '10.4'; prob = '0.7'
>>> \mathrm{d}x = dec.ibetac_inva(b, x, prob); mx = mpm.ibetac_inva(b, x, prob)
>>> ix = ipm.ibetac_inva(b, x, prob); fx = fpm.ibetac_inva(b, x, prob)
>>> gx = gmp.ibetac_inva(b, x, prob); ax = apm.ibetac_inva(b, x, prob)
>>> mpm.show([\mathrm{d}x, mx, ix, fx, gx, ax])
dec:  6.022956553898772220485519886468373977550E+0
mpm:  6.022956553898772220485519886468373977550e+0
ipm:  6.022956553898772220485519886468373977550e+0 (7.624e-40%)
fpm:  6.02295655389877E+00
gmp:  6.022956553898772220485519886468373977550E+00
apm:  6.022956553898772220485519886468373977550e+0 (7.624e-40%)

>>> fxa = fpm.ibetac_inva(b, x, prob); mpm.show([fxa]) # boost
fpm:  6.02295655389877E+00
>>> fx = fpm.ibetac(fxa, b, x); mpm.show([fx]) # boost
fpm:  7.00000000000000E-01
```

12.4.10 Inverse (on parameter b) of the real normalised incomplete beta function

`ctx.`**`ibeta_invb`**(a, x, q)

where `ctx` is `math53`, `ctxcpp`, `ctxboost` or `ctxflint`.

Returns the inverse of the normalised incomplete beta function with regard to parameter b, i.e. calculates a with $Q(a, x) = p$. The input parameters are $a > 0$, $b > 0$, $p \geq 0$.

See also BoostMath [87], Wikipedia [1217], MathWorld [257], NIST [456].

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; x = '0.3'; a = '7.8'; prob = '0.7'
>>> \mathrm{d}x = dec.ibeta_invb(a, x, prob); mx = mpm.ibeta_invb(a, x, prob)
>>> ix = ipm.ibeta_invb(a, x, prob); fx = fpm.ibeta_invb(a, x, prob)
>>> gx = gmp.ibeta_invb(a, x, prob); ax = apm.ibeta_invb(a, x, prob)
>>> mpm.show([\mathrm{d}x, mx, ix, fx, gx, ax])
dec:  2.2004295916555214543537953946491293468 38E+1
mpm:  2.2004295916555214543537953946491293468 38e+1
ipm:  2.2004295916555214543537953946491293468 38e+1 (8.347e-40%)
fpm:  2.20042959165552E+01
gmp:  2.2004295916555214543537953946491293468 38E+01
apm:  2.2004295916555214543537953946491293468 38e+1 (8.347e-40%)

>>> fxb = fpm.ibeta_invb(a, x, prob); mpm.show([fxb]) # boost
fpm:  2.20042959165552E+01
>>> fx = fpm.ibeta(a, fxb, x); mpm.show([fx]) # boost
fpm:  7.00000000000000E-01
```

12.4.11 Inverse (on parameter b) of the real normalised complementary incomplete beta function

`ctx.ibetac_invb`(a, x, q)

where `ctx` is `math53`, `ctxcpp`, `ctxboost` or `ctxflint`.

Returns the inverse of the complement of the normalized incomplete beta function with regard to parameter b, i.e. calculates b with $I_{1-x}(a, b) = p$. The input parameters are $a > 0$, $x > 0$, $p \geq 0, \leq 1$.

See also BoostMath [87], Wikipedia [1217], MathWorld [257], NIST [456].

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; x = '0.3'; a = '7.8'; prob = '0.7'
>>> \mathrm{d}x = dec.ibetac_invb(a, x, prob); mx = mpm.ibetac_invb(a, x, prob)
>>> ix = ipm.ibetac_invb(a, x, prob); fx = fpm.ibetac_invb(a, x, prob)
>>> gx = gmp.ibetac_invb(a, x, prob); ax = apm.ibetac_invb(a, x, prob)
>>> mpm.show([gx, fx, ax])
dec:  1.4035769060760995572408050341049104057 88E+1
mpm:  1.4035769060760995572408050341049104057 88e+1
ipm:  1.4035769060760995572408050341049104057 88e+1 (6.543e-40%)
fpm:  1.40357690607610E+01
gmp:  1.4035769060760995572408050341049104057 88E+01
apm:  1.4035769060760995572408050341049104057 88e+1 (6.543e-40%)

>>> fxb = fpm.ibetac_invb(a, x, prob); mpm.show([fxb]) # boost
fpm:  1.40357690607610E+01
>>> fx = fpm.ibetac(a, fxb, x); mpm.show([fx]) # boost
fpm:  6.99999999999999E-01
```

12.5 Hypergeometric function ${}_1F_2$

12.5.1 Non-regularized hypergeometric function ${}_1F_2$

`ctx.hyperg_1f2`(*a*, *b1*, *b2*, *z*)

Returns the generalized hypergeometric function ${}_1F_2$.

Returns ${}_1F_2(a_1;b_1,b_2;x) = \sum_{k=0}^{\infty} \frac{(a_1)_k}{(b_1)_k(b_2)_k}\frac{x^k}{k!}$

We also have ${}_1F_2(a_1;b_1,b_2;x) = \frac{\Gamma(b_2)}{\Gamma(a_1)\Gamma(b_2-a_1)}\int_0^1 (1-t)^{b_2-a_1-1}t^{a_1-1}{}_0F_1(b_1,tx)\,\mathrm{d}t$, where $\Re(b_2) > \Re(a_1) > 0$.

See also MathWorld [1026], MathWorld [284], Wikipedia [1369], NIST [24], Nijimbere [421], Tarasov [512], Mpmath [712].

See also: https://functions.wolfram.com/HypergeometricFunctions/Hypergeometric1F2/07/01/01/

See also: https://functions.wolfram.com/HypergeometricFunctions/Hypergeometric1F2/17/01/01/

See also: https://functions.wolfram.com/HypergeometricFunctions/Hypergeometric1F2/06/02/03/

See also: https://functions.wolfram.com/HypergeometricFunctions/Hypergeometric1F2/25/01/

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; a1 = '11.0'; b1 = '12.0'; b2 = '32.0'; x = '0.3'
>>> \mathrm{d}x = dec.hyp1f2(a1, b1, b2, x); mx = mpm.hyp1f2(a1, b1, b2, x); gx = gmp.hyp1f2(a1, b1, b2, x)
>>> fx = fpm.hyp1f2(a1, b1, b2, x); ax = apm.hyp1f2(a1, b1, b2, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  1.008629906366460362226305867117802783739E+0
mpm:  1.008629906366460362226305867117802783739e+0
gmp:  1.008629906366460362226305867117802783739E+00
fpm:  1.00862990636646E+00
apm:  1.008629906366460362226305867117802783739e+0 (1.138e-39%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; a1 = '11.0 + 2.0j'; b1 = '12.0 + 3.0j'; b2 = '42.0 + 3.0j';z = '3.0 + 4.0j'
>>> \mathrm{d}z = dec.hyp1f2(a1, b1, b2, z); mz = mpm.hyp1f2(a1, b1, b2, z); gz = gmp.hyp1f2(a1, b1, b2, z)
>>> fz = fpm.hyp1f2(a1, b1, b2, z); az = apm.hyp1f2(a1, b1, b2, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az], aligned=True)
dec: 1.0752386838476564793E+0              + 8.2118112439611053461E-2j
mpm: 1.0752386838476564793e+0              + 8.2118112439611053461e-2j
gmp: 1.0752386838476564793E+00             + 8.2118112439611053461E-02j
fpm: 1.07523868384766E+00                  + 8.21181124396110E-02j
apm: 1.0752386838476564793e+0 (7.878e-20%) + 8.2118112439611053461e-2 (6.447e-20%)j
```

12.5.2 Regularized hypergeometric function ${}_1\widetilde{F}_2$

`ctx.`**`hyperg_1f2r`**$(a, b1, b2, z)$

Returns the regularized generalized hypergeometric function ${}_1\widetilde{F}_2(a, b1, b2; z)$.

See also MathWorld [1026], MathWorld [284], Wikipedia [1369], NIST [24], Nijimbere [421], Tarasov [512], Mpmath [712].

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; a1 = '11.0'; b1 = '12.0'; b2 = '32.0'; x = '0.3'
>>> \mathrm{d}x = dec.hyp1f2r(a1, b1, b2, x); mx = mpm.hyp1f2r(a1, b1, b2, x); gx = gmp.hyp1f2r(a1, b1, b2, x)
>>> fx = fpm.hyp1f2r(a1, b1, b2, x); ax = apm.hyp1f2r(a1, b1, b2, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax])
dec:  3.072941936207392693664766625229320203604E-42
mpm:  3.072941936207392693664766625229320203604e-42
gmp:  3.072941936207392693664766625229320203604E-42
fpm:  3.07294193620739E-42
apm:  3.072941936207392693664766625229320203604e-42 (1.072e-39%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; a1 = '11.0 + 2.0j'; b1 = '12.0 + 3.0j'; b2 = '42.0 + 3.0j';z = '3.0 + 4.0j'
>>> \mathrm{d}z = dec.hyp1f2r(a1, b1, b2, z); mz = mpm.hyp1f2r(a1, b1, b2, z); gz = gmp.hyp1f2r(a1, b1, b2, z)
>>> fz = fpm.hyp1f2r(a1, b1, b2, z); az = apm.hyp1f2r(a1, b1, b2, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az], aligned=True)
dec: 1.2280824173267661851E-57              + 4.9727461410239566810E-58j
mpm: 1.2280824173267661851e-57              + 4.9727461410239566810e-58j
gmp: 1.2280824173267661851E-57              + 4.9727461410239566810E-58j
fpm: 1.22808241732677E-57                   + 4.97274614102396E-58j
apm: 1.2280824173267661851e-57 (1.319e-19%) + 4.9727461410239566810e-58 (1.085e-19%)j
```

12.6 Scorer functions

12.6.1 Scorer function $\mathrm{Gi}(x)$

ctx.scorer_gi(x)

Returns the Scorer function Gi, which gives a particular solution to the inhomogeneous Airy differential equation $f''(x) - xf(x) = 1/\pi$.

See also: MathWorld [1031], Wikipedia [1383], Ehrhardt [295] (3.1.7.7), NIST [436], Mpmath [718].

The Scorer function Gi is defined as

$$\mathrm{Gi}(x) = \frac{1}{\pi}\int_0^\infty \sin\left(xt - \frac{1}{3}t^3\right)\mathrm{d}t.$$

Another particular solution is given by the Scorer Hi-function. The two functions are related as $\mathrm{Gi}(z) + \mathrm{Hi}(z) = \mathrm{Bi}(z)$.

We also have

$$\mathrm{Gi}(z) = \tfrac{1}{3}\mathrm{Bi}(z) - \frac{z^2}{2\pi}\,{}_1F_2\left(1; \tfrac{4}{3}, \tfrac{5}{3}; \tfrac{1}{9}z^3\right)$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.AiryGi(0.5)
ereal('5.23598775598298873077E-1')
>>> math53.AiryGi('0.51')
ereal('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; x = -3
>>> \mathrm{d}x = dec.scorergi(x); mx = mpm.scorergi(x); gx = gmp.scorergi(x)
>>> fx = fpm.scorergi(x); ax = apm.scorergi(x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax],  aligned=True)
dec: -2.9905471837139642380158189762383534741 93E-1
mpm: -2.9905471837139642380158189762383534741 93e-1
gmp: -2.9905471837139642380158189762383534741 93E-01
fpm: -2.99054718371396E-01
apm: -2.9905471837139642380158189762383534741 92e-1 (-4.827e-37%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; z = '3 + 4j'
>>> \mathrm{d}z = dec.scorergi(z); mz = mpm.scorergi(z); gz = gmp.scorergi(z)
>>> fz = fpm.scorergi(z); az = apm.scorergi(z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: 8.4889448371208839089E-2              - 3.5862043476779870404E-2j
mpm: 8.4889448371208839089e-2              - 3.5862043476779870404e-2j
gmp: 8.4889448371208839089E-02             - 3.5862043476779870404E-02j
fpm: 8.48894483712088E-02                  - 3.58620434767799E-02j
apm: 8.4889448371208839123e-2 (6.78e-15%) - 3.5862043476779870473e-2 (-1.391e-14%)j
```

12.6.2 Scorer function $\mathrm{Hi}(x)$

`ctx.scorer_hi(x)`

Returns the Scorer function Hi, which gives a particular solution to the inhomogeneous Airy differential equation $f''(x) - xf(x) = 1/\pi$.

See also: MathWorld [1032], Wikipedia [1383], Ehrhardt [295] (3.1.7.8), Mpmath [719].

Returns the Scorer function Hi, defined as

$$\mathrm{Hi}(x) = \frac{1}{\pi}\int_0^\infty \exp\left(xt - \frac{1}{3}t^3\right)\,\mathrm{d}t$$

We also have

$$\mathrm{Hi}(z) = \tfrac{2}{3}\mathrm{Bi}(z) + \frac{z^2}{2\pi}\,{}_1F_2\left(1; \tfrac{4}{3}, \tfrac{5}{3}; \tfrac{1}{9}z^3\right)$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.AiryHi(0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.AiryHi('0.51')
ereal('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; x = -3
>>> \mathrm{d}x = dec.scorerhi(x); mx = mpm.scorerhi(x); gx = gmp.scorerhi(x)
>>> fx = fpm.scorerhi(x); ax = apm.scorerhi(x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax],  aligned=True)
dec: 1.0076509199646988058093704305134699072 05E-1
mpm: 1.0076509199646988058093704305134699072 05e-1
gmp: 1.0076509199646988058093704305134699072 05E-01
fpm: 1.00765091996470E-01
apm: 1.0076509199646988058093704305134699064 31e-1 (1.334e-33%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; z = '3 + 4j'
>>> \mathrm{d}z = dec.scorerhi(z); mz = mpm.scorerhi(z); gz = gmp.scorerhi(z)
>>> fz = fpm.scorerhi(z); az = apm.scorerhi(z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: 9.5150834628338203598E-1              + 1.0872383260084919901E+0j
mpm: 9.5150834628338203598e-1              + 1.0872383260084919901e+0j
gmp: 9.5150834628338203598E-01             + 1.0872383260084919901E+00j
fpm: 9.51508346283382E-01                  + 1.08723832600849E+00j
apm: 9.5150834628338203594e-1 (6.049e-16%) + 1.0872383260084919901e+0 (4.588e-16%)j
```

12.6.3 First derivative of the Scorer function $\mathrm{Gi}(x)$, $\mathrm{Gi}'(x)$

`ctx.scorer_gi_prime(x)`

Returns $\mathrm{Gi}'(x)$, the first derivative of the Airy (Scorer) function $\mathrm{Gi}(x)$.

See also: MathWorld [1031], Wikipedia [1383], Ehrhardt [295] (3.1.7.7), NIST [436], Mpmath [718].

The function is calculated as

$$\mathrm{Gi}'(z) = \tfrac{1}{3}\mathrm{Bi}'(z) - \frac{1}{40\pi}\left[40z \cdot {}_1F_2\left(1; \tfrac{4}{3}, \tfrac{5}{3}; \tfrac{1}{9}z^3\right) + 3z^4 \cdot {}_1F_2\left(2; \tfrac{7}{3}, \tfrac{8}{3}; \tfrac{1}{9}z^3\right)\right]$$

We also have $\mathrm{Gi}'(x) = \mathrm{Bi}'(x) - \mathrm{Hi}'(x)$.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.AiryGi(0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.AiryGi('0.51')
ereal('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; x = -3
>>> \mathrm{d}x = dec.scorergi(x); mx = mpm.scorergi(x); gx = gmp.scorergi(x)
>>> fx = fpm.scorergi(x); ax = apm.scorergi(x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax],  aligned=True)
dec: -2.9905471837139642380158189762383534741 93E-1
mpm: -2.9905471837139642380158189762383534741 93e-1
gmp: -2.9905471837139642380158189762383534741 93E-01
fpm: -2.99054718371396E-01
apm: -2.9905471837139642380158189762383534741 92e-1 (-4.827e-37%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; z = '3 + 4j'
>>> \mathrm{d}z = dec.scorergi(z); mz = mpm.scorergi(z); gz = gmp.scorergi(z)
>>> fz = fpm.scorergi(z); az = apm.scorergi(z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: 8.4889448371208839089E-2              - 3.5862043476779870404E-2j
mpm: 8.4889448371208839089e-2              - 3.5862043476779870404e-2j
gmp: 8.4889448371208839089E-02             - 3.5862043476779870404E-02j
fpm: 8.48894483712088E-02                  - 3.58620434767799E-02j
apm: 8.4889448371208839123e-2 (6.78e-15%) - 3.5862043476779870473e-2 (-1.391e-14%)j
```

12.6.4 First derivative of the Scorer function $\mathrm{Hi}(x)$, $\mathrm{Hi}'(x)$

`ctx.scorer_hi_prime(x)`

Returns $\mathrm{Hi}'(x)$, the first derivative of the Airy (Scorer) function $\mathrm{Hi}(x)$.

See also: MathWorld [1032], Wikipedia [1383], Ehrhardt [295] (3.1.7.8), Mpmath [719].

The function is calculated as

$$\mathrm{Hi}'(z) = \tfrac{2}{3}\mathrm{Bi}'(z) + \frac{1}{40\pi}\left[40z \cdot {}_1F_2\left(1; \tfrac{4}{3}, \tfrac{5}{3}; \tfrac{1}{9}z^3\right) + 3z^4 \cdot {}_1F_2\left(2; \tfrac{7}{3}, \tfrac{8}{3}; \tfrac{1}{9}z^3\right)\right]$$

It can also be represented as an integral:

$$\mathrm{Hi}'(x) = \frac{1}{\pi}\int_0^\infty t \exp\left(xt - \tfrac{1}{3}t^3\right) \mathrm{d}t$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.AiryHi(0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.AiryHi('0.51')
ereal('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; x = -3
>>> \mathrm{d}x = dec.scorerhi(x); mx = mpm.scorerhi(x); gx = gmp.scorerhi(x)
>>> fx = fpm.scorerhi(x); ax = apm.scorerhi(x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax],  aligned=True)
dec: 1.0076509199646988058093704305134699072 05E-1
mpm: 1.0076509199646988058093704305134699072 05e-1
gmp: 1.0076509199646988058093704305134699072 05E-01
fpm: 1.00765091996470E-01
apm: 1.0076509199646988058093704305134699064 31e-1 (1.334e-33%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; z = '3 + 4j'
>>> \mathrm{d}z = dec.scorerhi(z); mz = mpm.scorerhi(z); gz = gmp.scorerhi(z)
>>> fz = fpm.scorerhi(z); az = apm.scorerhi(z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: 9.5150834628338203598E-1              + 1.0872383260084919901E+0j
mpm: 9.5150834628338203598e-1              + 1.0872383260084919901e+0j
gmp: 9.5150834628338203598E-01             + 1.0872383260084919901E+00j
fpm: 9.51508346283382E-01                  + 1.08723832600849E+00j
apm: 9.5150834628338203594e-1 (6.049e-16%) + 1.0872383260084919901e+0 (4.588e-16%)j
```

12.7 Struve functions

12.7.1 Struve function $\mathrm{H}_n(x)$

ctx.struve_h(*nu*, *x*)

Returns the Struve function $H_\nu(x)$. See also Wikipedia [1384], MathWorld [1021], NIST [459], Ehrhardt [295] (3.1.9.3), Mpmath [708].

$$\mathbf{H}_n(x) = \sum_{k=0}^{\infty} \frac{(-1)^k}{\Gamma(k+\frac{3}{2})\Gamma(k+n+\frac{3}{2})} \left(\frac{z}{2}\right)^{2k+n+1}$$

which is a solution to the Struve differential equation

$$z^2 f''(z) + z f'(z) + (z^2 - n^2) f(z) = \frac{2z^{n+1}}{\pi(2n-1)!!}.$$

We also have

$$\mathbf{H}_\nu(x) = \left(\frac{z}{2}\right)^{\nu+1} {}_1\widetilde{F}_2\left(1; \frac{3}{2}, \nu+\frac{3}{2}; -\frac{z^2}{4}\right)$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.StruveH(3, 0.5)
ereal('5.235987755982988730E-1')
>>> math53.StruveH(3, '0.51')
ereal('5.351847902755998475E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; n = 10; x = -3
>>> \mathrm{d}x = dec.struveh(n, x); mx = mpm.struveh(n, x); gx = gmp.struveh(n, x)
>>> fx = fpm.struveh(n, x); ax = apm.struveh(n, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax],  aligned=True)
dec: -7.2058762694527534388921007769900586494 03E-6
mpm: -7.2058762694527534388921007769900586494 03e-6
gmp: -7.2058762694527534388921007769900586494 03E-06
fpm: -7.20587626945275E-06
apm: -7.2058762694527534388921007769900586494 03e-6 (-1.215e-39%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; n = '10 + 1j'; z = '3 + 4j'
>>> \mathrm{d}z = dec.struveh(n, z); mz = mpm.struveh(n, z); gz = gmp.struveh(n, z)
>>> fz = fpm.struveh(n, z); az = apm.struveh(n, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: -4.8345130788092493588E-4                + 8.7404070391062002932E-4j
mpm: -4.8345130788092493588e-4                + 8.7404070391062002932e-4j
gmp: -4.8345130788092493588E-04               + 8.7404070391062002932E-04j
fpm: -4.83451307880925E-04                    + 8.7404070391062 0E-04j
apm: -4.8345130788092493588e-4 (-2.994e-19%) + 8.7404070391062002932e-4 (2.366e-19%)j
```

12.7.2 Struve function $\mathrm{L}_\nu(x)$

ctx.struve_l(*nu*, *x*)

Returns the Struve function L. See also Wikipedia [1384], MathWorld [1020], NIST [459], Ehrhardt [295] (3.1.9.4), Mpmath [709].

Returns the Struve function $\mathbf{L}_\nu(x)$, defined as

$$\mathbf{L}_\nu(x) = \left(\tfrac{1}{2}x\right)^{\nu+1} \sum_{k=0}^{\infty} \frac{\left(\frac{1}{2}x\right)^{2k}}{\Gamma\left(k+\frac{3}{2}\right)\Gamma\left(k+\nu+\frac{3}{2}\right)}.$$

which solves to the modified Struve differential equation

$$z^2 f''(z) + z f'(z) - (z^2 + n^2) f(z) = \frac{2z^{n+1}}{\pi(2n-1)!!}.$$

We also have

$$\mathbf{L}_n(z) = -ie^{-n\pi i/2}\mathbf{H}_n(iz)$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.StruveL(3, 0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.StruveL(3, '0.51')
ereal('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; n = 10; x = -3
>>> \mathrm{d}x = dec.struvel(n, x); mx = mpm.struvel(n, x); gx = gmp.struvel(n, x)
>>> fx = fpm.struvel(n, x); ax = apm.struvel(n, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax],  aligned=True)
dec: -9.3529365166294384085698625084370213559 81E-6
mpm: -9.3529365166294384085698625084370213559 81e-6
gmp: -9.3529365166294384085698625084370213559 81E-06
fpm: -9.35293651662944E-06
apm: -9.3529365166294384085698625084370213524 70e-6 (-5.114e-35%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; n = '10'; z = '3 + 4j'
>>> \mathrm{d}z = dec.struvel(n, z); mz = mpm.struvel(n, z); gz = gmp.struvel(n, z)
>>> fz = fpm.struvel(n, z); az = apm.struvel(n, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: -8.8399682322365238730E-4                - 1.8271632883005884894E-3j
mpm: -8.8399682322365238730e-4                - 1.8271632883005884894e-3j
gmp: -8.8399682322365238730E-04               - 1.8271632883005884894E-03j
fpm: -8.83996823223652E-04                    - 1.82716328830059E-03j
apm: -8.8399682322365238730e-4 (-1.871e-19%) - 1.8271632883005884894e-3 (-9.054e-20%)j
```

12.7.3 Struve function $\mathrm{K}_\nu(x)$

`ctx.struve_k(nu, z)`

Returns the Struve function K(nu, z) = H(nu,z) - Y(n, z). See also Wikipedia [1384], MathWorld [1020], NIST [459].

$$\mathbf{K}_\nu\left(z\right) = \mathbf{H}_\nu\left(z\right) - Y_\nu\left(z\right)$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.StruveK(3, 0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.StruveK(3, '0.51')
ereal('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; n = 10; x = 3
>>> \mathrm{d}x = dec.struvek(n, x); mx = mpm.struvek(n, x); gx = gmp.struvek(n, x)
>>> fx = fpm.struvek(n, x); ax = apm.struvek(n, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax],  aligned=True)
dec: 2.582607136690175938562877297993741088665E+3
mpm: 2.582607136690175938562877297993741088665e+3
gmp: 2.582607136690175938562877297993741088665E+03
fpm: 2.58260713669018E+03
apm: 2.582607136690175938562877297993741088665e+3 (1.274e-38%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; n = '10'; z = '3 + 4j'
>>> \mathrm{d}z = dec.struvek(n, z); mz = mpm.struvek(n, z); gz = gmp.struvek(n, z)
>>> fz = fpm.struvek(n, z); az = apm.struvek(n, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: -6.7918399227722424068E+0               - 6.9970201805301178844E+0j
mpm: -6.7918399227722424068e+0               - 6.9970201805301178844e+0j
gmp: -6.7918399227722424068E+00              - 6.9970201805301178844E+00j
fpm: -6.79183992277224E+00                   - 6.99702018053012E+00j
apm: -6.7918399227722424068e+0 (-2.145e-18%) - 6.9970201805301178844e+0 (-2.131e-18%)j
```

12.7.4 Struve function $\mathrm{M}_\nu(x)$

`ctx.struve_m`(*nu*, *z*)

Returns the Struve function M(nu, z) = L(nu,z) - I(n, z).. See also Wikipedia [1384], MathWorld [1020], NIST [459].

$$\mathbf{M}_\nu\left(z\right) = \mathbf{L}_\nu\left(z\right) - I_\nu\left(z\right).$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.StruveM(3, 0.5)
ereal('5.235987755982988730 7E-1')
>>> math53.StruveM(3, '0.51')
ereal('5.351847902755998475 4E-1')
```

An example with real input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 40; n = 10; x = 3
>>> \mathrm{d}x = dec.struvem(n, x); mx = mpm.struvem(n, x); gx = gmp.struvem(n, x)
>>> fx = fpm.struvem(n, x); ax = apm.struvem(n, x)
>>> mpm.show([\mathrm{d}x, mx, gx, fx, ax],  aligned=True)
dec: -1.011145695398353025999970444305917861401E-5
mpm: -1.011145695398353025999970444305917861401e-5
gmp: -1.011145695398353025999970444305917861401E-05
fpm: -1.01114569539835E-05
apm: -1.011145695398353025999970444305917861401e-5 (-7.795e-39%)
```

An example with complex input:

```
>>> from xlcalcnet import dec, mpm, gmp, fpm, apm
>>> mpm.dps = 20; n = '10'; z = '3 + 4j'
>>> \mathrm{d}z = dec.struvem(n, z); mz = mpm.struvem(n, z); gz = gmp.struvem(n, z)
>>> fz = fpm.struvem(n, z); az = apm.struvem(n, z)
>>> mpm.show([\mathrm{d}z, mz, gz, fz, az],  aligned=True)
dec: 1.20505077798444167 2E-3              - 9.43213937911693939 16E-4j
mpm: 1.20505077798444167 2e-3              - 9.43213937911693939 16e-4j
gmp: 1.20505077798444167 2E-03             - 9.43213937911693939 16E-04j
fpm: 1.20505077798444E-03                  - 9.43213937911694E-04j
apm: 1.20505077798444167 2e-3 (8.237e-19%) - 9.43213937911693939 15e-4 (-4.385e-19%)j
```

12.8 Anger, Weber and Lommel functions

12.8.1 Anger function $\mathrm{J}_\nu(x)$

ctx.**anger_j**(n, z)

Returns the Anger function J. See also Wikipedia [1358], MathWorld [1013], NIST [455].

Gives the Anger function

$$\mathbf{J}_\nu(z) = \frac{1}{\pi}\int_0^\pi \cos(\nu t - z\sin t)dt$$

which is an entire function of both the parameter ν and the argument z. It solves the inhomogeneous Bessel differential equation

$$f''(z) + \frac{1}{z}f'(z) + \left(1 - \frac{\nu^2}{z^2}\right) f(z) = \frac{(z-\nu)}{\pi z^2}\sin(\pi\nu).$$

We also have

$$\begin{aligned} \mathbf{J}_\nu(z) &= \frac{z}{2}\sin\left(\tfrac{1}{2}\pi\nu\right) {}_1\widetilde{F}_2\left(1; \tfrac{1}{2}(3-\nu), \tfrac{1}{2}(3+\nu); -\frac{z^2}{4}\right) \\ &+ \cos\left(\tfrac{1}{2}\pi\nu\right) {}_1\widetilde{F}_2\left(1; 1-\tfrac{1}{2}\nu, 1+\tfrac{1}{2}\nu; -\frac{z^2}{4}\right) \end{aligned} \tag{12.9}$$

An example with real input:

```
>>> from xlcalcnet import dpm, mpm, gmp, fpm, apm
>>> mpm.dps = 40; n = 10; x = 3
>>> dx = dpm.angerj(n, x); mx = mpm.angerj(n, x); gx = gmp.angerj(n, x)
>>> fx = fpm.angerj(n, x); ax = apm.angerj(n, x)
>>> mpm.show([dx, mx, gx, fx, ax],  aligned=True)
dpm: 1.2928351645715883777534530802580170743 42E-5
mpm: 1.2928351645715883777534530802580170743 42e-5
gmp: 1.2928351645715883777534530802580170743 42E-05
fpm: 1.29283516457159E-05
apm: 1.2928351645715883777534530802580170654 27e-5 (4.139e-35%)
```

An example with complex input:

```
>>> from xlcalcnet import dpm, mpm, gmp, fpm, apm
>>> mpm.dps = 20; n = '10'; z = '3 + 4j'
>>> dz = dpm.angerj(n, z); mz = mpm.angerj(n, z); gz = gmp.angerj(n, z)
>>> fz = fpm.angerj(n, z); az = apm.angerj(n, z)
>>> mpm.show([dz, mz, gz, fz, az],  aligned=True)
dpm: -2.4028734611284405858E-3               + 1.9815132418922270634E-3j
mpm: -2.4028734611284405858e-3               + 1.9815132418922270634e-3j
gmp: -2.4028734611284405858E-03              + 1.9815132418922270634E-03j
fpm: -2.40287346112844E-03                   + 1.98151324189223E-03j
apm: -2.4028734611284405757e-3 (-4.846e-16%) + 1.9815132418922270691e-3 (4.828e-16%)j
```

12.8.2 Weber function $\mathbf{E}_\nu(x)$

`ctx.weber_e(`n, z`)`

Returns the Weber function E. See also Wikipedia [1358], MathWorld [1022], NIST [455].

Gives the Weber function

$$\mathbf{E}_\nu(z) = \frac{1}{\pi}\int_0^\pi \sin(\nu t - z\sin t)dt$$

which is an entire function of both the parameter ν and the argument z. It solves the inhomogeneous Bessel differential equation

$$f''(z) + \frac{1}{z}f'(z) + \left(1 - \frac{\nu^2}{z^2}\right)f(z) = -\frac{1}{\pi z^2}(z + \nu + (z-\nu)\cos(\pi\nu)).$$

We also have

$$\begin{aligned}\mathbf{E}_\nu(z) &= \sin\left(\tfrac{1}{2}\pi\nu\right){}_1\widetilde{F}_2\left(1; \tfrac{1}{2}(2-\nu), \tfrac{1}{2}(2+\nu); -\frac{z^2}{4}\right) \\ &- \frac{z}{2}\cos\left(\tfrac{1}{2}\pi\nu\right){}_1\widetilde{F}_2\left(1; \tfrac{1}{2}(3-\nu), \tfrac{1}{2}(3+\nu); -\frac{z^2}{4}\right)\end{aligned} \tag{12.10}$$

An example with real input:

```
>>> from xlcalcnet import dpm, mpm, gmp, fpm, apm
>>> mpm.dps = 40; n = 10; x = 3
>>> dx = dpm.webere(n, x); mx = mpm.webere(n, x); gx = gmp.webere(n, x)
>>> fx = fpm.webere(n, x); ax = apm.webere(n, x)
>>> mpm.show([dx, mx, gx, fx, ax],  aligned=True)
dpm: 2.14807501662584748777555733056854280 4621E-2
mpm: 2.14807501662584748777555733056854280 4621e-2
gmp: 2.14807501662584748777555733056854280 4621E-02
fpm: 2.14807501662585E-02
apm: 2.14807501662584748777555733056854280 4650e-2 (2.929e-36%)
```

An example with complex input:

```
>>> from xlcalcnet import dpm, mpm, gmp, fpm, apm
>>> mpm.dps = 20; n = '10'; z = '3 + 4j'
>>> dz = dpm.webere(n, z); mz = mpm.webere(n, z); gz = gmp.webere(n, z)
>>> fz = fpm.webere(n, z); az = apm.webere(n, z)
>>> mpm.show([dz, mz, gz, fz, az],  aligned=True)
dpm: 1.35856389425109942 79E-2              + 2.88903458579314661 83E-2j
mpm: 1.35856389425109942 79e-2             + 2.88903458579314661 83e-2j
gmp: 1.35856389425109942 79E-02            + 2.88903458579314661 83E-02j
fpm: 1.35856389425110E-02                  + 2.88903458579315E-02j
apm: 1.35856389425109942 81e-2 (3.872e-16%) + 2.88903458579314661 64e-2 (2.077e-16%)j
```

12.8.3 Lommel function $s_{\mu,\nu}(x) = s^{(1)}_{\mu,\nu}(x)$

`ctx.lommel_s1(mu, nu, z)`

Returns the Lommel function S1. See also Wikipedia [1380], MathWorld [1028], NIST [458].

Gives the Lommel function $s_{\mu,\nu}$ or $s^{(1)}_{\mu,\nu}$

$$s_{\mu,\nu}(z) = \frac{z^{\mu+1}}{(\mu-\nu+1)(\mu+\nu+1)}\,{}_1F_2\left(1; \frac{\mu-\nu+3}{2}, \frac{\mu+\nu+3}{2}; -\frac{z^2}{4}\right)$$

which solves the inhomogeneous Bessel equation

$$z^2 f''(z) + z f'(z) + (z^2 - \nu^2) f(z) = z^{\mu+1}.$$

An integral representation is given by

$$s_{\mu,\nu}(z) = \frac{\pi^2}{2}\left[Y_\nu(z)\int_0^z t^\mu J_\nu(t)\,dt - J_\nu(z)\int_0^z t^\mu Y_\nu(t)\,dt\right].$$

A second solution is given by *lommels2()*.

An example with real input:

```
>>> from xlcalcnet import dpm, mpm, gmp, fpm, apm
>>> mpm.dps = 40; mu = '11.3'; nu = '2.7'; x = '0.3'
>>> dx = dpm.lommels1(nu, mu, x); mx = mpm.lommels1(nu, mu, x); gx = gmp.lommels1(nu, mu, x)
>>> fx = fpm.lommels1(nu, mu, x); ax = apm.lommels1(nu, mu, x)
>>> mpm.show([dx, mx, gx, fx, ax])
dpm:  -1.020597995063898424938319205823615501143E-4
mpm:  -1.020597995063898424938319205823615501143e-4
gmp:  -1.020597995063898424938319205823615501143E-04
fpm:  -1.02059799506390E-04
apm:  -1.020597995063898424938319205823615501143e-4 (-2.293e-37%)
```

An example with complex input:

```
>>> from xlcalcnet import dpm, mpm, gmp, fpm, apm
>>> mpm.dps = 20; nu = '11.0 + 2.0j'; mu = '12.0 + 3.0j'; z = '3.0 + 4.0j'
>>> dz = dpm.lommels1(nu, mu, z); mz = mpm.lommels1(nu, mu, z); gz = gmp.lommels1(nu, mu, z)
>>> fz = fpm.lommels1(nu, mu, z); az = apm.lommels1(nu, mu, z)
>>> mpm.show([dz, mz, gz, fz, az], aligned=True)
dpm: -1.8060086283535056970E+6               + 6.5353506430569991508E+5j
mpm: -1.8060086283535056970e+6               + 6.5353506430569991508e+5j
gmp: -1.8060086283535056970E+06              + 6.5353506430569991508E+05j
fpm: -1.80600862835351E+06                   + 6.53535064305700E+05j
apm: -1.8060086283535056970e+6 (-3.443e-19%) + 6.5353506430569991508e+5 (4.077e-19%)j
```

12.8.4 Lommel function $S_{\mu,\nu}(x) = s^{(2)}_{\mu,\nu}(x)$

`ctx.lommel_s2(mu, nu, z)`

Returns the Lommel function S2. See also Wikipedia [1380], MathWorld [1028], NIST [458].

Gives the second Lommel function $S_{\mu,\nu}$ or $s^{(2)}_{\mu,\nu}$

$$S_{\mu,\nu}(z) = s_{\mu,\nu}(z) + 2^{\mu-1}\Gamma\left(\tfrac{1}{2}(\mu-\nu+1)\right)\Gamma\left(\tfrac{1}{2}(\mu+\nu+1)\right)\times \left[\sin(\tfrac{1}{2}(\mu-\nu)\pi)J_\nu(z) - \cos(\tfrac{1}{2}(\mu-\nu)\pi)Y_\nu(z)\right]$$

which solves the same differential equation as *lommels1()*.

An example with real input:

```
>>> from xlcalcnet import dpm, mpm, gmp, fpm, apm
>>> mpm.dps = 40; mu = '11.3'; nu = '2.7'; x = '0.3'
>>> dx = dpm.lommels2(nu, mu, x); mx = mpm.lommels2(nu, mu, x); gx = gmp.lommels2(nu, mu, x)
>>> fx = fpm.lommels2(nu, mu, x); ax = apm.lommels2(nu, mu, x)
>>> mpm.show([dx, mx, gx, fx, ax])
dpm:  5.14837292139577959642391778711232466148 0E+18
mpm:  5.14837292139577959642391778711232466148 0e+18
gmp:  5.14837292139577959642391778711232466148 0E+18
fpm:  5.14837292139580E+18
apm:  5.14837292139577959642391778711232093063 4e+18 (7.037e-31%)
```

An example with complex input:

```
>>> from xlcalcnet import dpm, mpm, gmp, fpm, apm
>>> mpm.dps = 20; nu = '11.0 + 2.0j'; mu = '12.0 + 3.0j'; z = '3.0 + 4.0j'
>>> dz = dpm.lommels2(nu, mu, z); mz = mpm.lommels2(nu, mu, z); gz = gmp.lommels2(nu, mu, z)
>>> fz = fpm.lommels2(nu, mu, z); az = apm.lommels2(nu, mu, z)
>>> mpm.show([dz, mz, gz, fz, az], aligned=True)
dpm: -5.9447048505419644513E+13              + 2.6440996022817513605E+14j
mpm: -5.9447048505419644513e+13              + 2.6440996022817513605e+14j
gmp: -5.9447048505419644513E+13              + 2.6440996022817513605E+14j
fpm: -5.94470485054196E+13                   + 2.64409960228175E+14j
apm: -5.9447048505428070102e+13 (-1.1e-10%) + 2.6440996022816726372e+14 (3.001e-11%)j
```

Part III

Supporting Functions

CHAPTER

THIRTEEN

ALGEBRA WITH RANDOM VARIABLES

13.1 Probability density function (pdf)

13.1.1 Calculating the pdf from the cdf

`ctx.pdf_from_cdf`(*x*, *cf*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Returns $\text{pdf}_X(x)$ from the cumulative distribution function (cdf) of a random variable X:

$$\text{pdf}_X(x) = \frac{\mathrm{d}}{\mathrm{d}x}\text{cdf}_X(x).$$

Using this method can be a viable option when the cdf, but not the pdf, is available in closed form.

13.1.2 Calculating the pdf from the characteristic function

`ctx.pdf_from_cf`(*x*, *cf*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Calculates the pdf as the inverse Fourier transform of its characteristic function.

The PDF of Y is the inverse Fourier transform of its characteristic function,

$$\text{pdf}_X(x) = \frac{1}{2\pi}\int_{-\infty}^{\infty} e^{ity}C_X(t)\mathrm{d}y = \frac{1}{\pi}\int_0^{\infty} \Re\left(e^{-itx}C_X(t)\right)\mathrm{d}t.$$

where $\Re(z)$ denotes the real part of z. We also have

$$\int_0^{\infty} \Re\left(e^{-itx}C_X(t)\right)\mathrm{d}t = \int_0^{\infty} \Re\left(C_X(t)\right)\cos(tx)\mathrm{d}t + \int_0^{\infty} \Im\left(C_X(t)\right)\sin(tx)\mathrm{d}t.$$

Using the right-hand side of this equation allows for efficient use of the quadrature formula of Fillon, with the half-period $\omega = \pi/x$.

13.2 Probability mass function (pmf)

13.2.1 Calculating the pmf from the cdf

`ctx.pmf_from_cdf`(*x*, *cdf*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Returns $\text{pmf}_X(x)$, the probability mass function, calculated from the cumulative distribution function (cdf) of a random variable X:

$$\text{pmf}_X(x) = (\text{cdf}_X(x+d) - \text{cdf}_X(x))/d.$$

Using this method can be a viable option when the cdf, but not the pmf, is available in closed form.

13.2.2 Calculating the pmf from the characteristic function

`ctx.pmf_from_cf_lattice`(*x*, *cf*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Returns $\text{pmf}_X(x)$, the probability mass function, calculated from the characteristic function $C_X(t)$ of a random variable X:

$$\text{pmf}(x) = \frac{1}{2\pi}\int_{-\pi}^{\pi} e^{-itx} C_X(t)\mathrm{d}t.$$

Using this method can be a viable option when the characteristic function, but not the pmf, is available in closed form.

13.2.3 Calculating the pmf from the factorial moments

`ctx.pmf_from_factorialmoments`(*x*, *cf*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Returns $\text{pmf}_X(x)$, the probability mass function, of a random variable X, calculated from the factorial moments $\mu_{[r]}$:

$$\Pr[X = x] = \sum_{j\geq x}(-1)^{x+j}\binom{j}{x}\frac{\mu'_{[j]}}{j!} = \sum_{r\geq 0}(-1)^r\frac{\mu'_{[x+r]}}{x!r!}$$

and

$$\sum_{i\geq x}\Pr[X = i] = \sum_{j\geq x}(-1)^{x+j}\binom{j-1}{x-1}\frac{\mu'_{[j]}}{j!}$$

Using this method can be a viable option when the factorial moments, but not the pmf, are available in closed form.

13.2.4 Approximating the pmf with asymptotic expansions

This call Edgeworth, Cornish-Fisher, or Lugganinni-Rice.

13.3 Cumulative distribution function (cdf)

13.3.1 Calculating the cdf from the pdf

`ctx.cdf_from_pdf`(*x*, *cf*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function (cdf) of a random variable X:

$$\mathrm{cdf}_X(x) = \int_0^x \mathrm{pdf}_X(x)\mathrm{d}t.$$

Using this method can be a viable option when the pdf, but not the cdf, is available in closed form.

13.3.2 Calculating the cdf from the pmf

`ctx.cdf_from_pmf`(*x*, *cf*)

where `ctx` is `dec`, `mpm`, or `gmp`.

If X is a purely discrete random variable, then it attains values $x_1, x_2, \ldots$ with probability $p_i = p(x_i)$, and the CDF of X will be discontinuous at the points x_i:

$$F_X(x) = \mathrm{P}(X \leq x) = \sum_{x_i \leq x} \mathrm{P}(X = x_i) = \sum_{x_i \leq x} p(x_i).$$

13.3.3 Calculating the cdf from the characteristic function

`ctx.cdf_from_cf_continuous`(*x*, *cf*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Calculates the cdf from the characteristic function using the procedure of Gil-Pelaez.

Assuming that the characteristic function is absolutely integrable over $(-\infty, \infty)$, Gil-Pelaez derived the following inversion formula which requires integration of a real-valued function only. In particular,

$$\mathrm{cdf}_X(x) = \frac{1}{2} - \frac{1}{2\pi}\int_{-\infty}^{\infty} \frac{e^{-itx}C_X(t) - e^{itx}C_X(t)}{it}\mathrm{d}t = \frac{1}{2} - \frac{1}{\pi}\int_0^{\infty} \Im\left(\frac{e^{-itx}C_X(t)}{t}\right)\mathrm{d}t.$$

where $\Im(z)$ denotes the imaginary part of z. We also have

$$\int_0^{\infty} \Im\left(\frac{e^{-itx}C_X(t)}{t}\right)\mathrm{d}t = \int_0^{\infty} \Im\left(\frac{C_X(t)}{t}\right)\cos(tx)\mathrm{d}t - \int_0^{\infty} \Re\left(\frac{C_X(t)}{t}\right)\sin(tx)\mathrm{d}t.$$

Using the right-hand side of this equation allows for efficient use of the quadrature formula of Fillon, with the half-period $\omega = \pi/x$.

The python code is currently in Charfun.py

The following code provides a test-suite for the numerical inversion of the characteristic function:

```
class tests_charfunc(rv_cont):

    def __init__(self, rv2, x = 5, a = 0, b = 2):

        cdf_value = rv2.cdf(x)
        print ("rv2.cdf(x): ", cdf_value)

        rv2.set_x(x)
        plot(rv2.gil_pelaez_imag, [a, b], points=200)
```

(continues on next page)

(continued from previous page)

```
        print

        rv2.set_x(x)
        plot(rv2.gil_pelaez_cos, [a, b], points=200)
        print

        rv2.set_x(x)
        plot(rv2.gil_pelaez_sin, [a, b], points=200)
        print

        rv2.set_x(x)
        I0 = quad(rv2.gil_pelaez_imag, [0, +inf])
        print("Integral: ", I0)
        result0 = 0.5 - I0/pi
        print("result0:", result0 )
        print("diff0:", result0 - cdf_value)


        rv2.set_x(x)
        I1 =quadosc(rv2.gil_pelaez_cos, [0, inf], period=1*pi/x) # half period
        print("I1:", I1 )

        rv2.set_x(x)
        I2 =quadosc(rv2.gil_pelaez_sin, [0, inf], period=1*pi/x) # half period
        print("I2:", I2 )

        I3 = I1 + I2
        print("I3:", I3 )
        print("Int diff:", I3 - I0)
        result3 = 0.5 - I3/pi
        print("result3:", result3 )
        print("diff3:", result3 - cdf_value)
```

Example: non-central chi-squared distribution

The following code shows the difference between using the generic integration (error: diff0: -6.1218939724378892896e-6) and quadrature for oscillatory functions (error: diff3: 8.4703294725430033907e-22).

```
mp.dps = 20
print()
print ("Hello mpDistributions local ! ")
print()


a = 0.0
b = 2

n = mpf("5")
x = mpf("10")
rv2 = mpr().chisquare(n)

tests_charfunc(rv2, x, a, b)
```

This produces the following output (plots are to be added):

```
Hello mpDistributions local !

rv2.cdf(x):  0.92476475385348782128

Integral:  -1.334418597712864291
result0: 0.92475863195951538339
diff0: -6.1218939724378892896e-6
I1: 0.11817924829245123086
I2: -1.4526170785024453884
```

(continues on next page)

(continued from previous page)

```
I3: -1.3344378302099941575
Int diff: -0.00001923249712986651 1475
result3: 0.92476475385348782128
diff3: 8.4703294725430033907e-22
```

13.3.4 Calculating the cdf and sf from the characteristic function (lattice distribution)

`ctx.cdf_from_cf_lattice`(*x*, *cf*)

where `ctx` is `dec`, `mpm`, or `gmp`.

The corresponding inversion formula for discrete distributions on the nonnegative integers is

$$\operatorname{cdf}(x) = \frac{1}{\pi}\int_0^\pi \Re\left(C_X(t)\sum_{z=0}^{x} e^{-itz}\right)\mathrm{d}t.$$

$$\operatorname{sf}(x) = 1 - \operatorname{cdf}(x) = \frac{1}{\pi}\int_0^\pi \Re\left(C_X(t)\sum_{z=x+1}^{N(N+1)/2} e^{-itz}\right)\mathrm{d}t.$$

13.3.5 Calculating the cdf from the factorial moments (lattice distributions)

The following relationships hold between the probabilities and the factorial moments in the case of a discrete distribution:

$$\Pr[X = x] = \sum_{j\geq x}(-1)^{x+j}\binom{j}{x}\frac{\mu'_{[j]}}{j!} = \sum_{r\geq 0}(-1)^r\frac{\mu'_{[x+r]}}{x!r!}$$

and

$$\sum_{i\geq x}\Pr[X = i] = \sum_{j\geq x}(-1)^{x+j}\binom{j-1}{x-1}\frac{\mu'_{[j]}}{j!}$$

See also Johnson(2005), page 59.

13.4 Quantile function

See also Wikipedia [1132].

13.4.1 Calculating the quantile function from the cdf

ctx.qtf_from cdf(x, cf)

where ctx is dec, mpm, or gmp.

This requires a starting point for a Newton iteration. If a specific starting point is not available, then a Cornish-Fisher expansion can be tried first.

13.4.2 Approximating the quantile function from the cumulant generating function

See inverse Jension saddlepoint approximation for examples

13.4.3 Approximating the quantile function from the cumulants

See Cornish-Fisher expansion for example.

13.5 Characteristic function

13.5.1 Calculating the characteristic function from the pdf (continuous distribution)

ctx.cf_from pdf(x, cf)

where ctx is dec, mpm, or gmp.

Let X denote a continuous univariate random variable with probability density function (PDF) $\text{pdf}_X(x)$, cumulative distribution function (CDF) $\text{cdf}_X(x)$, and moment generating function $M_X(t)$. The characteristic function of the distribution of X, given by the Fourier transform of its PDF, is defined as

$$C_X(t) = \mathrm{E}\left[e^{itX}\right] = M_X(it) = \int_{-\infty}^{\infty} e^{itx}\text{pdf}_X(x)\mathrm{d}x.$$

Note however that the characteristic function of a distribution always exists, even when the probability density function or moment-generating function do not.

13.5.2 Calculating the characteristic function from the pmf (lattice distribution)

ctx.cf_from pmf(x, cf)

where ctx is dec, mpm, or gmp.

For a discrete distribution on the nonnegative integers, it is defined as

$$C_X(t) = \mathrm{E}[e^{itX}] = \sum_{j=0}^{\infty} e^{ijt}\text{pmf}(j)$$

See Johnson(2005), p. 50

13.5.3 Calculating the characteristic function from the quantile function

ctx.cf_from qtf(x, cf)

where ctx is dec, mpm, or gmp.

$$C_X(t) = \mathrm{E}\left[e^{itX}\right] = \int_0^1 e^{it\,\text{qtf}_X(p)}dp.$$

13.5.4 Calculating the characteristic function from the raw moments

ctx.**cf_from_rawmoments**(*x*, *cf*)

where ctx is dec, mpm, or gmp.

Formally, we can write

$$C_X(t) = 1 + \sum_{k=1}^{\infty} \mu'_X(k)\frac{i^k t^k}{k!}$$

$$C_X(t) = 1 + \sum_{k=1}^{\infty} \mathrm{E}\left[X^k\right]\frac{i^k t^k}{k!}$$

See also http://mathworld.wolfram.com/RawMoment.html for an expression involving cumulants.

13.6 Moment generating function

See also Wikipedia [1129].

13.6.1 Calculating the moment-generating function from the pdf

`ctx.mgf_from_pdf`(*x*, *cf*)

where `ctx` is `dec`, `mpm`, or `gmp`.

The moment-generating function's definition expands to

$$M_X(t) = \mathrm{E}\left[e^{tX}\right] = \int_{-\infty}^{\infty} e^{tx} f_X(x)\,\mathrm{d}x$$

13.6.2 Calculating the moment-generating function from the characteristic function

`ctx.mgf_from_cf`(*x*, *cf*)

where `ctx` is `dec`, `mpm`, or `gmp`.

The characteristic function $\varphi_X(t)$ is related to the moment-generating function via $\varphi_X(t) = M_{iX}(t) = M_X(it)$: the characteristic function is the moment-generating function of iX or the moment generating function of X evaluated on the imaginary axis. This function can also be viewed as the Fourier transform of the probability density function, which can therefore be deduced from it by inverse Fourier transform.

13.6.3 Calculating the moment-generating function from the cumulant-generating function

`ctx.mgf_from_cgf`(*x*, *cf*)

where `ctx` is `dec`, `mpm`, or `gmp`.

The cumulant-generating function is defined as the logarithm of the moment-generating function; some instead define the cumulant-generating function as the logarithm of the characteristic function, while others call this latter the second cumulant-generating function.

13.6.4 Calculating the moment-generating function from the probability-generating function

`ctx.mgf_from_pgf`(*x*, *cf*)

where `ctx` is `dec`, `mpm`, or `gmp`.

The probability-generating function is defined as $G(z) = E\left[z^X\right]$. This immediately implies that $G(e^t) = E\left[e^{tX}\right] = M_X(t)$.

```
>>> from xlcalcnet import *
>>> mp.dps = 30
>>> mu = 0; sigma = 1; t = 0.3;
>>> print ("c_x: ", chi_squared(mu, sigma).c_x(t))
6.356352346256452561561561561456 1356E+00
```

13.6.5 Calculating the moment-generating function from the raw moments

`ctx.mgf_from_rawmoments`(*x*, *cf*)

where `ctx` is `dec`, `mpm`, or `gmp`.

$$M_X(t) = 1 + tm_1 + \frac{t^2 m_2}{2!} + \frac{t^3 m_3}{3!} + \cdots + \frac{t^n m_n}{n!} + \cdots$$

where m_n is the nth moment. Differentiating $M_X(t) i$ times with respect to t and setting $t = 0$, we obtain the ith moment about the origin.

13.7 Cumulant generating function

See also Wikipedia [1117].

13.7.1 Calculating the cumulant-generating function from the characteristic function

`ctx.cgf_from_cf`(*x*, *cf*)

where `ctx` is `dec`, `mpm`, or `gmp`.

The characteristic function $\varphi_X(t)$ is related to the moment-generating function via $\varphi_X(t) = M_{iX}(t) = M_X(it)$: the characteristic function is the moment-generating function of iX or the moment generating function of X evaluated on the imaginary axis. This function can also be viewed as the Fourier transform of the probability density function, which can therefore be deduced from it by inverse Fourier transform.

13.7.2 Calculating the cumulant-generating function from the moment-generating function

`ctx.cgf_from_mgf`(*x*, *cf*)

where `ctx` is `dec`, `mpm`, or `gmp`.

The cumulant-generating function is defined as the logarithm of the moment-generating function; some instead define the cumulant-generating function as the logarithm of the characteristic function, while others call this latter the second cumulant-generating function.

13.7.3 Calculating the cumulant-generating function from the probability-generating function

`ctx.cgf_from_pgf`(*x*, *cf*)

where `ctx` is `dec`, `mpm`, or `gmp`.

The cumulant-generating function is defined as the logarithm of the moment-generating function; some instead define the cumulant-generating function as the logarithm of the characteristic function, while others call this latter the second cumulant-generating function.

13.7.4 Calculating the cumulant-generating function from the cumulants

`ctx.cgf_from_cumulants`(*x*, *cf*)

where `ctx` is `dec`, `mpm`, or `gmp`.

The cumulants κ_n are obtained from a power series expansion of the cumulant generating function:

$$K(t) = \sum_{n=1}^{\infty} \kappa_n \frac{t^n}{n!} = \mu t + \sigma^2 \frac{t^2}{2} + \cdots .$$

This expansion is a Maclaurin series, so the n-th cumulant can be obtained by differentiating the above expansion n times and evaluating the result at zero:

$$\kappa_n = K^{(n)}(0).$$

13.8 Probability generating function

13.8.1 Calculating the probability-generating function from the pmf vector

`ctx.`**`pgf_from_pmf_vector`**(*x*, *cf*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Some text

13.8.2 Calculating the probability-generating function from the moment-generating function

`ctx.`**`pgf_from_mgf`**(*x*, *cf*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Some text

13.9 Factorial Moments

13.9.1 Calculating the factorial moments from the raw moments

`ctx.factorial_moments_from_rawmoments`(*x*, *cf*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Calculates the factorial moments $\mu'_{[r]}$ from the raw moments μ'_r.

$$\mu'_{[r]} = \sum_{j=0}^{r} s(r,j)\mu'_j,$$

where $s(r,j)$ is the Stirling number of the first kind.

13.9.2 Calculating the factorial moments from the cumulants

`ctx.factorial_moments_from_cumulants`(*x*, *cf*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Calculates the factorial moments $\mu'_{[r]}$ from the raw moments μ'_r.

$$\mu'_{[r]} = \sum_{j=0}^{r} s(r,j)\mu'_j,$$

where $s(r,j)$ is the Stirling number of the first kind.

13.10 Raw Moments

See also Wikipedia [1128]

13.10.1 Calculating the raw moments from the pdf

`ctx.rawmoments_from_pdf(x, cf)`

where `ctx` is `dec`, `mpm`, or `gmp`.

The n-th moment of a real-valued continuous function f(x) of a real variable about a value c is

$$\mu_n = \int_{-\infty}^{\infty} (x-c)^n \, f(x) \, \mathrm{d}x.$$

It is possible to define moments for random variables in a more general fashion than moments for real values—see moments in metric spaces. The moment of a function, without further explanation, usually refers to the above expression with c = 0.

13.10.2 Calculating the raw moments from the pmf

`ctx.rawmoments_from_pmf_vector(x, cf)`

where `ctx` is `dec`, `mpm`, or `gmp`.

If X is a purely discrete random variable, then it attains values $x_1, x_2, \ldots$ with probability $p_i = p(x_i)$, and the CDF of X will be discontinuous at the points x_i:

$$\mu_n = \sum_{x_i \leq x} x_i^n p(x_i).$$

13.10.3 Calculating the raw moments from the factorial moments

`ctx.rawmoments_from_factorial_moments(x, cf)`

where `ctx` is `dec`, `mpm`, or `gmp`.

Calculates the raw moments μ'_r from the factorial moments $\mu'_{[r]}$

$$\mu'_r = \sum_{j=0}^{r} S(r,j) \mu'_{[j]},$$

where $S(r,j)$ is the Stirling number of the second kind.

13.10.4 Calculating the raw moments from the central moments

`ctx.rawmoments_from_centralmoments(central, raw)`

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Calculates the raw moments μ'_r from the central moments μ_r (see Lee and Lin [402], Rinne [478], p. 36):

$$\mu'_r = \sum_{j=0}^{r} \binom{r}{j} \mu_{r-j} (\mu'_1)^r$$

```
>>> from xlcalcnet import dec, mpr, ivr, ivc
>>> ivr.dps = 25; ivr.pretty = True
>>> ivr.exp([-inf,0])
[0.0, 1.0]
>>> ivr.exp([0,1])
[1.0, 2.7182818284590452353602874955 8]
```

13.10.5 Calculating the raw moments from the cumulants

`ctx.rawmoments_from_cumulants()`

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Calculates the raw moments μ'_r from the cumulants κ_r (see Lee and Lin [402], Rinne [478], p. 36):

$$\mu'_r = \kappa_r + \sum_{j=1}^{r-1} \binom{r-1}{j-1} \mu'_{r-j} \kappa_j$$

```
>>> from xlcalcnet import dec, mpr, ivr, ivc
>>> ivr.dps = 25; ivr.pretty = True
>>> ivr.exp([-inf,0])
[0.0, 1.0]
>>> ivr.exp([0,1])
[1.0, 2.7182818284590452353602874955 8]
```

13.10.6 Calculating the raw moments from the moment-generating function

`ctx.rawmoments_from_mgf()`

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

The moment-generating function is so called because if it exists on an open interval around t = 0, then it is the exponential generating function of the moments of the probability distribution:

$$m_n = E\left(X^n\right) = M_X^{(n)}(0) = \left.\frac{d^n M_X}{\mathrm{d}t^n}\right|_{t=0}.$$

That is, with n being a nonnegative integer, the nth moment about 0 is the nth derivative of the moment generating function, evaluated at t = 0.

13.10.7 Calculating the raw moments from the characteristic function

`ctx.rawmoments_from_cf()`

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Characteristic functions can also be used to find moments of a random variable. Provided that the nth moment exists, the characteristic function can be differentiated n times and

$$\mathrm{E}\left[X^n\right] = i^{-n}\,\varphi_X^{(n)}(0) = i^{-n}\left[\frac{d^n}{\mathrm{d}t^n}\varphi_X(t)\right] t = 0$$

13.10.8 Calculating the raw moments from the probability-generating function

`ctx.rawmoments_from_pgf()`

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

The kth raw moment of X is given by

$$\mathrm{E}(X^k) = \left(z\frac{\partial}{\partial z}\right)^k G(z)\Big|_{z=1^-}$$

More generally, the kth factorial moment,

$\mathrm{E}(X(X-1)\cdots(X-k+1))$ of X is given by

$$\mathrm{E}\left(\frac{X!}{(X-k)!}\right) = G^{(k)}(1^-), \quad k \geq 0.$$

13.11 Central Moments

See also Wikipedia [1117]

13.11.1 Calculating the central moments from the factorial moments

`ctx.centralmoments_from_factorialmoments`(*self*, *mfac*)

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Calculates the central moments μ_r from the factorial moments.

13.11.2 Calculating the central moments from the raw moments

`ctx.centralmoments_from_rawmoments`(*central*, *raw*)

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Calculates the central moments μ_r from raw the moments μ'_r (see Lee and Lin [402], Rinne [478], p. 36):

$$\mu_r = \sum_{j=0}^{r} \binom{r}{j} \mu'_{r-j} (-\mu'_1)^j$$

```
>>> from xlcalcnet import dec, mpr, ivr, ivc
>>> ivr.dps = 25; ivr.pretty = True
>>> ivr.exp([-inf,0])
[0.0, 1.0]
>>> ivr.exp([0,1])
[1.0, 2.7182818284590452353602874955 8]
```

13.11.3 Calculating the central moments from the cumulants

`ctx.centralmoments_from_cumulants`()

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Calculates the central moments μ_r from the cumulants κ_r (see Lee and Lin [402], Rinne [478], p. 36):

$$\mu_r = \kappa_r + \sum_{j=1}^{r-1} \binom{r-1}{j-1} \mu_{r-j} \kappa_j$$

```
>>> from xlcalcnet import dec, mpr, ivr, ivc
>>> ivr.dps = 25; ivr.pretty = True
>>> ivr.exp([-inf,0])
[0.0, 1.0]
>>> ivr.exp([0,1])
[1.0, 2.7182818284590452353602874955 8]
```

13.12 Cumulants

See also Wikipedia [1117]

13.12.1 Calculating the cumulants from the pmf vector

cumulants_from_pmfvector(*self*, *x*, *nl*, *order*, *show=False*)

where ctx is ipm, dec, mpm, or gmp.

Calculates the cumulants κ_r from the pmf vector.

13.12.2 Calculating the cumulants from the factorial moments

ctx.**cumulants_from_factorialmoments**(*self*, *mfac*)

where ctx is ipm, dec, mpm, or gmp.

Calculates the cumulants κ_r from the factorial moments.

13.12.3 Calculating the cumulants from the raw moments

ctx.**cumulants_from_rawmoments**(*raw_moments*)

where ctx is ipm, dec, mpm, or gmp.

Calculates the cumulants κ_r from the raw moments μ'_r (see Lee and Lin [402], Rinne [478], p. 36):

$$\kappa_r = \mu'_r - \sum_{j=1}^{r-1} \binom{r-1}{j-1} \mu'_{r-j} \kappa_j$$

13.12.4 Calculating the cumulants from the central moments

ctx.**cumulants_from_centralmoments**(*cumulants*, *central*)

where ctx is ipm, dec, mpm, or gmp.

Calculates the cumulants κ_r from the central moments μ_r :

$$\kappa_r = \mu_r - \sum_{j=2}^{r-1} \binom{r-1}{j-1} \mu_{r-j} \kappa_j, \quad r > 1, \quad \kappa_1 = \mu_1.$$

```
>>> from xlcalcnet import dec, mpr, ivr, ivc
>>> ivr.dps = 25; ivr.pretty = True
>>> ivr.exp([-inf,0])
[0.0, 1.0]
>>> ivr.exp([0,1])
[1.0, 2.71828182845904523536028749558]
```

13.12.5 Calculating the cumulants from the cumulant-generating function

ctx.**cumulants_from_cdf**(*k*, *cgf*)

where ctx is ipm, dec, mpm, or gmp.

The cumulants κ_n are obtained from a power series expansion of the cumulant generating function:

$$K(t) = \sum_{n=1}^{\infty} \kappa_n \frac{t^n}{n!} = \mu t + \sigma^2 \frac{t^2}{2} + \cdots .$$

This expansion is a Maclaurin series, so the n-th cumulant can be obtained by differentiating the above expansion n times and evaluating the result at zero:

$$\kappa_n = K^{(n)}(0).$$

CHAPTER

FOURTEEN

SERIES AND INTEGRALS

14.1 Finite series algorithms for selected distributions

This section provides distribution functions in interval arithmetic for some special cases. These function can be used to assess the accuracy for other algorithms without verification.

14.1.1 Central χ^2 distribution, cdf (integer degrees of freedom)

`ctx.chi2_cohen_cdf`(*x*, *nu*, *cdf=True*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns the cdf of the central chi-square distribution for integer degrees of freedom. See also Wikipedia [1143], MathWorld [792], BoostMath [53], Witkovský [1457].

The cdf can be expressed as a finite sum if n is an integer:

$$F_{\chi^2}(n,x) = 1 + 2\Phi(-\sqrt{x}) + 2\phi\left(\sqrt{x}\right) \sum_{r=1}^{(n-1)/2} \frac{\sqrt{x}^{2r-1}}{1\cdot 3\cdot 5\ldots(2r-1)}, \qquad \text{for } n \text{ odd},$$

$$F_{\chi^2}(n,x) = e^{-x/2}\left(1 + \sum_{r=1}^{(n-2)/2} \frac{x^r}{2\cdot 4\cdot 6\ldots(2r)}\right), \qquad \text{for } n \text{ even},$$

where $\phi(\cdot)$ denotes the pdf of the normal distribution (see) and $\Phi(\cdot)$ denotes the cdf of the normal distribution (see).

An example:

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; x = 12; n = 10
>>> dx = dec.chi2_cohen_cdf(x, n); mx = mpm.chi2_cohen_cdf(x, n)
>>> ix = ipm.chi2_cohen_cdf(x, n); fx = fpm.chi2_cohen_cdf(x, n)
>>> gx = gmp.chi2_cohen_cdf(x, n); ax = apm.chi2_cohen_cdf(x, n)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

14.1.2 Central Student t distribution, cdf (integer degrees of freedom)

ctx.**student_t_owen_cdf**(*x*, *nu*, *cdf=True*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

Returns the cdf of the central Student t distribution for integer degrees of freedom. See also Wikipedia [1166], MathWorld [809], BoostMath [69], Broda and Paolella [160], Witkovský [1453], Witkovský [1472].

The cdf can be expressed as a finite sum if n is an integer:

$$F_t\left(n,x\right)=\tfrac{1}{2}+z_n+(c_1+c_3+\cdots+c_{n-2}),\qquad\text{for } n \text{ odd},$$

$$\text{where } z_n=\frac{1}{\pi}\arctan(\frac{x}{\sqrt{n}});a_n=\frac{1}{\sqrt{n}\pi};b_n=\frac{n}{n+x^2};c_1=xa_nb_n;c_k=c_{k-2}b_n(1-1/k)$$

$$F_t\left(n,x\right)=\tfrac{1}{2}+(c_0+c_2+\cdots+c_{n-2}),\qquad\text{for } n \text{ even},$$

$$\text{where } d_n=\frac{1}{2\sqrt{n+x^2}};b_n=\frac{n}{n+x^2};c_0=xd_n;c_k=c_{k-2}b_n(1-1/k)$$

An example:

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; x = 2; n = 10;
>>> dx = dec.student_t_owen_cdf(x, n); mx = mpm.student_t_owen_cdf(x, n)
>>> ix = ipm.student_t_owen_cdf(x, n); fx = fpm.student_t_owen_cdf(x, n)
>>> gx = gmp.student_t_owen_cdf(x, n); ax = apm.student_t_owen_cdf(x, n)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

14.1.3 Central Fisher F distribution, cdf (integer degrees of freedom)

ctx.**fisher_f_seber_cdf**(*x*, *m*, *n*, *cdf=True*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

Returns the cdf of the central Fisher F distribution for integer degrees of freedom. See also Wikipedia [1146], MathWorld [795], BoostMath [56], Witkovský [1459], Abramowitz and Stegun. [3], Butler and Paolella [166], Chattamvelli and Jones [175], Witkovský [1453].

The cdf can be expressed as a finite sum if m is an integer, and n is a positive real number:

$$1-F_F\left(m,n,x\right)=a_m+b_m(c_1+c_3+\cdots+c_{m-2}),\qquad\text{for } m \text{ odd},$$

$$\text{where } a_m=2T(n,-z_m);b_m=2t(n,z_m)\cdot z_m;z_m=\sqrt{mx};$$

$$1-F_F\left(m,n,x\right)=d_m(c_0+c_2+\cdots+c_{m-2}),\qquad\text{for } m \text{ even},$$

$$\text{where } d_m=(1-u_m)^{n/2}$$

$$\text{and } u_m=mx/(mx+n),\quad c_0=c_1=1,\quad c_k=c_{k-2}u_m\cdot(n+k-2)/k$$

An example:

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; x = 3; m = 10; n = 20
>>> dx = dec.fisher_f_seber_cdf(x, m, n); mx = mpm.fisher_f_seber_cdf(x, m, n)
>>> ix = ipm.fisher_f_seber_cdf(x, m, n); fx = fpm.fisher_f_seber_cdf(x, m, n)
>>> gx = gmp.fisher_f_seber_cdf(x, m, n); ax = apm.fisher_f_seber_cdf(x, m, n)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
```

(continues on next page)

(continued from previous page)

```
dec:  3.11387742341683605571461609007444414994 3E-1
mpm:  3.11387742341683605571461609007444414994 3e-1
ipm:  3.11387742341683605571461609007444414994 4e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.11387742341683605571461609007444414994 3E-01
ipm:  3.11387742341683605571461609007444414994 3e-1 (4.055e-38%)
```

14.1.4 Central Beta distribution, cdf ($2a$ an integer, $2b$ an integer)

`ctx.beta_seber_cdf`(*x*, *a*, *b*, *cdf=True*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns the cdf of the central Fisher F distribution for integer degrees of freedom. See also Wikipedia [1141], MathWorld [791], BoostMath [51], Witkovský [1456].

An example:

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; x = '0.3'; a = '10'; b = '20'
>>> dx = dec.beta_seber_cdf(x, a, b); mx = mpm.beta_seber_cdf(x, a, b)
>>> ix = ipm.beta_seber_cdf(x, a, b); fx = fpm.beta_seber_cdf(x, a, b)
>>> gx = gmp.beta_seber_cdf(x, a, b); ax = apm.beta_seber_cdf(x, a, b)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.11387742341683605571461609007444414994 3E-1
mpm:  3.11387742341683605571461609007444414994 3e-1
ipm:  3.11387742341683605571461609007444414994 4e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.11387742341683605571461609007444414994 3E-01
ipm:  3.11387742341683605571461609007444414994 3e-1 (4.055e-38%)
```

14.1.5 Noncentral χ^2 distribution, cdf (integer degrees of freedom)

`ctx.chi2_nc_cohen_cdf`(*x*, *nu*, *lambda1*, *cdf=True*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns the cdf of the central chi-square distribution for integer degrees of freedom. See also Wikipedia [1159], MathWorld [804], Patnaik [462], Penev and Raykov [464], Wang and Gray [789], Winterbottom [1447], BoostMath [64], Witkovský [1467], Johansson [384], András and Baricz [10].

For odd degrees of freedom, the pdf and cdf can be expressed as a finite sum, using the recurrence relations given in section ref{NoncentralChiSquareDistributionRecur}, and defining $h(n, x, \lambda) = e^{(1/2)(x+\lambda)} f_{\chi^2}(n, x; \lambda)$:

$$F_{\chi^2}\left(1, x; \delta^2\right) = \Phi(x - \delta) - \Phi(-x - \delta)$$

$$h(1, x; \lambda) = \frac{\cosh(\sqrt{x\lambda})}{\sqrt{2\pi x}}, \quad h(3, x; \lambda) = \frac{\sinh(\sqrt{x\lambda})}{\sqrt{2\pi\lambda}}$$

where $\Phi(\cdot)$ denotes the cdf of the normal distribution.

NOTE: This needs to be extended using Marcum Q.

An example:

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; x = 12; nu = 7; l = 30
>>> dx = dec.chi2_nc_cohen_cdf(x, n, l); mx = mpm.chi2_nc_cohen_cdf(x, n, l)
>>> ix = ipm.chi2_nc_cohen_cdf(x, n, l); fx = fpm.chi2_nc_cohen_cdf(x, n, l)
>>> gx = gmp.chi2_nc_cohen_cdf(x, n, l); ax = apm.chi2_nc_cohen_cdf(x, n, l)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.11387742341683605571461609007444414994 3E-1
```

(continues on next page)

(continued from previous page)

```
mpm:  3.11387742341683605571461609007444414994 3e-1
ipm:  3.11387742341683605571461609007444414994 4e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.11387742341683605571461609007444414994 3E-01
ipm:  3.11387742341683605571461609007444414994 3e-1 (4.055e-38%)
```

14.1.6 Noncentral Student t distribution, cdf (integer degrees of freedom)

`ctx.student_t_nc_owen_cdf`(*x*, *n*, *delta*, *cdf=True*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns the cdf of the noncentral Student t distribution for integer degrees of freedom $n \geq 1$, noncentrality parameter $\delta \in \mathbb{R}$ and the support interval $(-\infty, +\infty)$. See also Wikipedia [1160], MathWorld [806], BoostMath [66], Benton and Krishnamoorthy [30], Broda and Paolella [160], Owen [452], Wang and Gray [789], Witkovský [1454], Johansson [384].

The function uses the following algorithm given by Owen [452]:

$$F_{t'}\left(n, x, \delta\right) = \Phi(-\delta\sqrt{B}) + 2(M_1 + M_3 + \cdots + M_n) \quad \text{for odd degrees of freedom}$$

$$F_{t'}\left(n, x, \delta\right) = \Phi(-\delta) + \sqrt{2\pi}(M_2 + M_4 + \cdots + M_n) \quad \text{for even degrees of freedom}$$

$$A = \frac{t}{\sqrt{n}}, \quad B = \frac{n}{n + t^2}$$

$$M_1 = T_{\text{Owen}}(\delta\sqrt{B}, A), \quad M_2 = A\sqrt{B}\phi(\delta\sqrt{B}) - \Phi(\delta A\sqrt{B})$$

$$M_3 = B(\delta A M_2 + A\phi(\delta)/\sqrt{2\pi}), \quad M_4 = \tfrac{1}{2}B(\delta A M_3 + M_2)$$

$$M_k = \frac{k-3}{k-2}B(a_k \delta A M_{k-1} + M_{k-2}), \quad a_k = \frac{1}{(k-4)a_{k-1}} \quad \text{for } k \geq 5,$$

where $T_{\text{Owen}}(\cdot, \cdot)$ denotes Owen's T function , and $\Phi(\cdot)$ and $\phi(\cdot)$ denote the cdf and pdf of the normal distribution, respectively.

An example:

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; x = 20; n = 10; d = 30
>>> dx = dec.student_t_nc_owen_cdf(x, n, d); mx = mpm.student_t_nc_owen_cdf(x, n, d)
>>> ix = ipm.student_t_nc_owen_cdf(x, n, d); fx = fpm.student_t_nc_owen_cdf(x, n, d)
>>> gx = gmp.student_t_nc_owen_cdf(x, n, d); ax = apm.student_t_nc_owen_cdf(x, n, d)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.11387742341683605571461609007444414994 3E-1
mpm:  3.11387742341683605571461609007444414994 3e-1
ipm:  3.11387742341683605571461609007444414994 4e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.11387742341683605571461609007444414994 3E-01
ipm:  3.11387742341683605571461609007444414994 3e-1 (4.055e-38%)
```

14.1.7 Noncentral Fisher F distribution, cdf (m an even integer)

`ctx.fisher_f_nc_seber_cdf`(*x*, *m*, *n*, *lambda1*, *cdf=True*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns the cdf of the noncentral Fisher F distribution for integer degrees of freedom. See also Wikipedia [1157], MathWorld [805], BoostMath [65], Benton and Krishnamoorthy [30], Butler and Paolella [166], Chou [179], Chattamvelli and Jones [175], Wang and Gray [789], Witkovský [1468], Johansson [384].

An example:

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; x = 13; m = 10; n = 20; l1 = 30
>>> dx = dec.fisher_f_nc_seber_cdf(x, m, n, l1); mx = mpm.fisher_f_nc_seber_cdf(x, m, n, l1)
>>> ix = ipm.fisher_f_nc_seber_cdf(x, m, n, l1); fx = fpm.fisher_f_nc_seber_cdf(x, m, n, l1)
>>> gx = gmp.fisher_f_nc_seber_cdf(x, m, n, l1); ax = apm.fisher_f_nc_seber_cdf(x, m, n, l1)
>>> mpm.show([dx, mx, ix]); mpm.show([fx, gx, ax])
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

14.1.8 Noncentral Beta distribution, cdf (b an integer)

`ctx.beta_nc_seber_cdf`(x, a, b, *lambda1*, *cdf=True*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns the cdf of the noncentral Fisher F distribution for integer degrees of freedom. See also Wikipedia [1158], BoostMath [63], Wang and Gray [789], Witkovský [1466], Seber [494], Johansson [384].

CDF: Finite Series for even error degrees of freedom:

This is code for noncentral beta and needs to be adapted for noncentral F.

The cdf can be calculated using the following finite series, if b is an integer:

$$I(x; a, b, \lambda) = e^{-\lambda(1-x)} \sum_{n=0}^{b-1} L_n, \quad \text{where}$$

$$L_0 = 1, \quad L_1 = (1-x)(a+\lambda x),$$

$$L_n = \frac{1-x}{n}\left((2n-2+a+\lambda x)L_{n-1} - (n+a-2)(1-x)L_{n-2}\right)$$

An example:

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; x = 0.25; a = 10; b = 20; l = 30
>>> dx = dec.beta_nc_seber_cdf(x, a, b, l); mx = mpm.beta_nc_seber_cdf(x, a, b, l)
>>> ix = ipm.beta_nc_seber_cdf(x, a, b, l); fx = fpm.beta_nc_seber_cdf(x, a, b, l)
>>> gx = gmp.beta_nc_seber_cdf(x, a, b, l); ax = apm.beta_nc_seber_cdf(x, a, b, l)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

14.1.9 Pearson's ρ distribution, pdf (integer N)

`ctx.pearson_rho_nc_owen_pdf`(r, N, *rho*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns the cdf of the Pearson rho distribution for integer degrees of freedom. See also Wikipedia [1163], MathWorld [793], Hotelling [373], Odeh [424].

See Hotelling [373].

For $N = 3, 4$ the probability density function can be expressed in closed form Odeh [424]:

$$f_R(3, r; \rho) = \frac{A^2(1 + xU)}{\pi B^2 C}$$

$$f_R(4, r; \rho) = \frac{AC^3(B^2U + 3x(1 + xU))}{\pi B^4}$$

where x, A, B, C and U are defined as follows:

$$x = \rho r, \qquad A = \sqrt{1 - \rho^2}, \quad B = \sqrt{1 - x^2}, \quad C = \sqrt{1 - r^2}, \quad U = \frac{\arccos(-x)}{B}$$

The probability density function $f_R(N, r; \rho)$ satisfies the following recurrence formula for $N \geq 5$ (see Hotelling [373]):

$$f_R(N, r; \rho) = \frac{2N - 5}{B^2(N - 3)} xAC f_R(N - 1, r; \rho) + \frac{N - 3}{B^2(N - 4)} A^2C^2 f_R(N - 2, r; \rho)$$

For $0 \leq x \leq 1$,this recurrence formula can be safely used to find a sequence of values for $f_R(5, r; \rho)$, $f_R(6, r; \rho), ..., f_R(N, r; \rho)$. However, for $-1 < x < 0$ the recurrence formula is numerically unstable, since the two terms on the right-hand of the equation are of opposite sign.

An example:

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; r = '0.25'; N = '20'; rho = '0.1'
>>> dx = dec.pearson_rho_nc_owen_pdf(x, N, rho); mx = mpm.pearson_rho_nc_owen_pdf(x, N, rho)
>>> ix = ipm.pearson_rho_nc_owen_pdf(x, N, rho); fx = fpm.pearson_rho_nc_owen_pdf(x, N, rho)
>>> gx = gmp.pearson_rho_nc_owen_pdf(x, N, rho); ax = apm.pearson_rho_nc_owen_pdf(x, N, rho)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

14.1.10 Pearson's ρ distribution, cdf (integer N)

`ctx.pearson_rho_nc_owen_cdf`(*x*, *N*, *rho*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns the cdf of the Pearson rho distribution for integer degrees of freedom. See also Wikipedia [1163], MathWorld [793], Hotelling [373], Odeh [424].

For $N = 3, 4, 5, 6$ the cumulative distribution function $F_R(N, r; \rho)$ can be expressed in closed form

$$F_R(3, r; \rho) = \frac{\arccos(-r)}{\pi} - \frac{\rho CU}{\pi}$$

$$F_R(4, r; \rho) = \frac{\arccos(\rho)}{\pi} - \frac{\rho AC^2}{\pi B^2} - \frac{rA^3U}{\pi B^2}$$

$$F_R(5, r; \rho) = \frac{\arccos(-r)}{\pi} - \frac{(x^2 - 3\rho^3 + 2)rA^2C}{2\pi B^4} + \frac{(\rho^2 - 3 + 2\rho^2x^2)\rho C^3U}{2\pi B^4}$$

$$F_R(6, r; \rho) = \frac{\arccos(\rho)}{\pi} - \frac{[\rho r^2(2x^2 + 13) - 2\rho(4x^4 + 6x^2 + 5) + \rho^3(11x^2 + 4)`AC^2}{6\pi B^6} + \frac{2x^2(-2r^2 + 1)rA^5U}{6\pi B^6} \tag{14.1}$$

where x, A, B, C and U are defined as follows:

$$x = \rho r, \qquad A = \sqrt{1-\rho^2}, \quad B = \sqrt{1-x^2}, \quad C = \sqrt{1-r^2}, \quad U = \frac{\arccos(-x)}{B}$$

The cumulative distribution function $F_R(N, r; \rho)$ satisfies the following recurrence formula for $N \geq 7$ (see Hotelling [373]):

$$\begin{aligned} F_R(N,r;\rho) \quad = \quad & \frac{2(N-4)\rho^2 - N + 5}{(N-3)\rho^2} F_R(N-2,r;\rho) \\ & + \frac{(N-5)A^2}{(N-3)\rho^2} F_R(N-4,r;\rho) \\ & + \frac{(N-4)A^2C^2 - (2N-9)B^2}{(N-4)(N-3)\rho^2 AC} \rho f_R(N-1,r;\rho) \\ & + \frac{(N-4)^2 + (3N(N-8)+47)\rho^2}{(N-4)^2(N-3)\rho^2} r f_R(N-2,r;\rho) \end{aligned} \tag{14.2}$$

For N odd, the above formula can be used repeatedly to find $F_7, F_9, ..., F_N$ starting with values of F_3 and F_5.

For N even, the formula can be used repeatedly to find $F_8, F_{10}, ..., F_N$ starting with values of F_4 and F_6.

However, in many situations the formula is numerically unstable, e.g. if $\rho^2 < \frac{N-5}{2(N-4)}$, the first two terms on the right hand side of equation (ref{eq:PearsonRho_Closed_Recur_1}) are of opposite sign.

An example:

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; r = '0.25'; N = '20'; rho = '0.1'
>>> dx = dec.pearson_rho_nc_owen_cdf(x, N, rho); mx = mpm.pearson_rho_nc_owen_cdf(x, N, rho)
>>> ix = ipm.pearson_rho_nc_owen_cdf(x, N, rho); fx = fpm.pearson_rho_nc_owen_cdf(x, N, rho)
>>> gx = gmp.pearson_rho_nc_owen_cdf(x, N, rho); ax = apm.pearson_rho_nc_owen_cdf(x, N, rho)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

14.1.11 Fisher's R^2 distribution, cdf (finite sum for $N - p$ even)

`ctx.fisher_r2_gd1_cdf`(*x*, *a*, *b*, *lambda*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns the cdf of the multiple correlation coefficient distribution for $N - p$ an even integer. See also Lee [405], Lee [406], Gurland [355], Gurland and Milton [357], Gurland and Asiribo [356], Muirhead [416], Benton and Krishnamoorthy [30], Fisher [334], Gatsonis and Sampson [341].

CDF: Finite Series of Gurland:

$$F_{R^2}(x; p, N, \rho^2) = \sum_{j=0}^{k} b_j I_y\left(\tfrac{1}{2}(p-1+2j), k\right) \quad \text{where}$$

$$k = \tfrac{1}{2}(N-p), \quad y = \frac{x(1-\rho^2)}{1-x\rho^2}, \quad b_j = \binom{k}{j}(\rho^2)^j(1-\rho^2)^{k-j}$$

An example:

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; r2 = '0.25'; p = '3'; N = '20'; rho2 = '0.1'
>>> dx = dec.fisher_r2_gd1_cdf(r2, p, N, rho2); mx = mpm.fisher_r2_gd1_cdf(r2, p, N, rho2)
>>> ix = ipm.fisher_r2_gd1_cdf(r2, p, N, rho2); fx = fpm.fisher_r2_gd1_cdf(r2, p, N, rho2)
>>> gx = gmp.fisher_r2_gd1_cdf(r2, p, N, rho2); ax = apm.fisher_r2_gd1_cdf(r2, p, N, rho2)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

14.1.12 Roy's largest root distribution, pdf, cdf and sf

`ctx.`**`roy_pdf_cdf_sf`**(*x*, *p*, *n1*, *n2*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns simultaneouly $\text{pdf}_X(r)$, the probability density function , $\text{cdf}_X(x)$, the cumulative distribution function, and $\text{sf}_X(x)$, the survival function, of a random variable X, following the distribution of Roy's largest root, with parameters *p*, *n1* and *n2* and the support interval $(0, 1)$.

Let X, Y denote two independent real Gaussian $p \times n_1$ and $p \times n_2$ matrices with $n_1, n_2 \geq p$, each constituted by zero mean independent, identically distributed columns with common covariance. Then Roy's largest root criterion, used in multivariate analysis of variance (MANOVA), is based on the statistic of the largest eigenvalue, Θ_1, of $(X + Y)^{-1}Y$, where X and Y are independent central Wishart matrices.

See also Anderson [9], Muirhead [416], Butler [165], Chiani [177], Chiani [178], and *dist_roy()*.

See also Chen 2002 (Tables), Turgeon (2018), R Package rootWishart.

The pdf and cdf of Θ_1 are given by:

$$\text{pdf}_X(\theta_1) = C\sqrt{|A(\theta_1)|} \times \tfrac{1}{2}\text{tr}\left(A(\theta_1)^{-1} \cdot \frac{\text{d}A(\theta_1)}{\text{d}\theta_1}\right)$$

$$\text{cdf}_X(\theta_1) = C\sqrt{|A(\theta_1)|}, \quad \text{where}$$

$$C = \pi^{s/2} \prod_{i=1}^{s} \frac{\Gamma\left(\frac{1}{2}(i + 2m + 2n + s + 2)\right)}{\Gamma\left(\frac{i}{2}\right)\Gamma\left(\frac{1}{2}(i + 2m + 1)\right)\Gamma\left(\frac{1}{2}(i + 2n + 1)\right)},$$

$$s = p, \quad m = (n_1 - p - 1)/2, \quad n = (n_2 - p - 1)/2.$$

When s is even, we have $n_{mat} = s$ and the elements of the $s \times s$ skew-symmetric matrix $A(\theta_1)$ are:

$$a_{i,j}(\theta_1) = E(\theta_1; m + j, m + i) - E(\theta_1; m + i, m + j) \quad i, j = 1, \ldots, s, \quad \text{where}$$

$$E(x; a, b) = \int_0^x t^{a-1}(1 - t)^n B(t; b, n + 1)\text{d}t.$$

When s is odd, we have $n_{mat} = s + 1$ and the elements of the $(s + 1) \times (s + 1)$ skew-symmetric matrix $A(\theta_1)$ are as above, with the additional elements

$$a_{i,s+1}(\theta_1) = I(\theta_1; m + i, n + 1) \quad i = 1, \ldots, s; \quad a_{s+1,j}(\theta_1) = -a_{j,s+1}(\theta_1) \quad j = 1, \ldots, s..$$

Note that $a_{i,j}(\theta_1) = -a_{j,i}(\theta_1)$ and $a_{i,i}(\theta_1) = a_{s+1,s+1}(\theta_1) = 0$.

An example:

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; p = 3; n1 = 10; n2 = 12
>>> dx = dec.roy_pdf_cdf_sf(x, p, n1, n2); mx = mpm.roy_pdf_cdf_sf(x, p, n1, n2);
>>> ix = ipm.roy_pdf_cdf_sf(x, p, n1, n2); fx = fpm.roy_pdf_cdf_sf(x, p, n1, n2);
>>> gx = gmp.roy_pdf_cdf_sf(x, p, n1, n2); ax = apm.roy_pdf_cdf_sf(x, p, n1, n2)
>>> mpm.show([dx, mx, ix])
dec:  9.72730704058195372049161324674614667467 6E-1
mpm:  9.72730704058195372049161324674614667467 6e-1
ipm:  9.72730704058195372049161324674614667467 6e-1 (5.901e-40%)
fpm:  9.72730704058195E-01
gmp:  9.72730704058195372049161324674614667467 6E-01
ipm:  9.72730704058195372049161324674614667467 6e-1 (5.901e-40%)
```

14.2 Infinite series algorithms for selected functions and distributions

This section provides additional finite sums algorithms.

14.2.1 Incomplete gamma function, continued fractions (Peizer)

`ctx.gamma_peizer_cdf_sf_pdf(`a, x`)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

See also Peizer and Pratt [463].

The integral can be calculated using continued fractions. This method provides rigorous error bounds for for `ipm.` and `apm.`.

If $a - \frac{1}{2} > x$ let P be a left tail. Then

$$P = \frac{M^b}{\Gamma(b+1)} e^{-M} \frac{1}{(1 + u_1/(v_1 + u_2/(v_2 + u_3/(v_3 + \ldots))))}$$

where $M = x, b = a, u_1 = -M, u_{2j} = jM, u_{2j+1} = -(b+j)M, v_j = b + j, j = 1, 2, \ldots$

The approximants obtained by terminating at u_k/v_k for $k = 1, 2, 5, 6, 9, 10, \ldots$ decrease monotonically toward P and those for $k = 0, 3, 4, 7, 8, 11, 12, \ldots$ increase monotonically toward P as long as $k \leq 2B - 1$, where B is the integer part of b; for $k \geq 2B - 2$, the even approximants approach P monotonically from above and the odd ones from below if B is even, vice versa if B is odd. The monotonicity is strict throughout except that, if b is an integer, the fraction terminates at $k = 2b - 2$.

If $a - \frac{1}{2} \leq x$ let Q be a right tail. Then

$$Q = \frac{M^{b-1}}{\Gamma(b)} e^{-M} \frac{1}{(1 + u_1/(v_1 + u_2/(v_2 + u_3/(v_3 + \ldots))))}$$

where $M = x, b = a, u_{2j-1} = j - b, v_{2j-1} = M, u_{2j} = j, v_{2j} = 1, j = 1, 2, \ldots$

The approximants obtained by terminating at u_k/v_k approach Q strictly monotonically from above for

$k = 1, 2, 5, 6, 9, 10, \ldots$ and from below for $k = 0, 3, 4, 7, 8, 11, 12, \ldots$

> **Note**
>
> While the algorithm given above seems to offer an easy way to calculate the function in interval arithmetic, one needs to remember that forward recurrence of continuous fractions is entirely unstable in interval arithmetic (see Cuyt *et al.* [189], pages 154 - 159). Therefore one first needs to evaluate the algorithm using forward recurrence in floating point arithmetic to determine the index of the (likely) highest required approximant, and then again using backward recurrence to actually evaluate it in interval arithmetic.

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; a = 10.4; x = 8.7
>>> dx = dec.gamma_peizer_cdf_sf_pdf(a, x); mx = mpm.gamma_peizer_cdf_sf_pdf(a, x);
>>> ix = ipm.gamma_peizer_cdf_sf_pdf(a, x); fx = fpm.gamma_peizer_cdf_sf_pdf(a, x);
>>> gx = gmp.gamma_peizer_cdf_sf_pdf(a, x); ax = apm.gamma_peizer_cdf_sf_pdf(a, x)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

14.2.2 Incomplete gamma function, asymptotic expansion (Paris)

ctx.**gamma_paris_cdf_sf**(a, x)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

This method does not provide rigorous error bounds for for ipm. and apm..

[Paris2016` gives the following expansion (for source code, see Sub demoParis() in DistXArb):

Let $m = 0, 1, 2...$ and $\chi = (z-a)/\sqrt{z}$. Then, when $\Re(z-a) \geq 0$, we have the expansion

$$\Gamma(a,z) = z^{a-\frac{1}{2}} e^{-z} \left(d_0(\chi) \sum_{k=0}^{m} \frac{A_k(\chi)}{z^{k/2}} - \sum_{k=1}^{m} \frac{B_k(\chi)}{z^{k/2}} + O\left(z^{-(m+1)/2}\right) \right)$$

as $z \to \infty$ in the sector $|\arg z| < \frac{1}{2}\pi$.

Let $m = 0, 1, 2...$ and $\chi = (z-a)/\sqrt{z}$. Then, when $\Re(z-a) \leq 0$, we have the expansion

$$\gamma(a,z) = z^{a-\frac{1}{2}} e^{-z} \left(d_0(-\chi) \sum_{k=0}^{m} \frac{A_k(\chi)}{z^{k/2}} + \sum_{k=1}^{m} \frac{B_k(\chi)}{z^{k/2}} + O\left(z^{-(m+1)/2}\right) \right)$$

as $z \to \infty$ in the sector $|\arg z| < \frac{1}{2}\pi$.

$$A_k(\chi) = \sum_{j=0}^{k} (-1)^j S_3(k+2j, j) p_{k+2j}(\chi), \quad B_k(\chi) = \sum_{j=0}^{k} (-1)^j S_3(k+2j, j) q_{k+2j}(\chi).$$

$$d_0(\chi) = \sqrt{\pi/2}\, e^{\chi^2/2}\, \operatorname{erfc}(\chi/\sqrt{2})$$

$$p_0(\chi) = 1, \quad p_1(\chi) = -\chi, \quad p_{k+1}(\chi) = \frac{1}{k+1}\left(p_{k-1}(\chi) - \chi p_k(\chi)\right), \quad k \geq 1$$

$$q_0(\chi) = 0, \quad q_1(\chi) = -1, \quad q_{k+1}(\chi) = \frac{1}{k+1}\left(q_{k-1}(\chi) - \chi q_k(\chi)\right), \quad k \geq 1$$

The coefficients $S_3(k, j)$ are the 3-associated Stirling numbers of the second kind. They are determined recursively:

$$S_3(n+1, k) = k\, S_3(n, k) + \binom{n}{2} S_3(n-2, k-1)$$

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; a = 1.0E5; x = 1.001E5
>>> dx = dec.gamma_paris_cdf_sf(a, x); mx = mpm.gamma_paris_cdf_sf(a, x)
>>> ix = ipm.gamma_paris_cdf_sf(a, x); fx = fpm.gamma_paris_cdf_sf(a, x)
>>> gx = gmp.gamma_paris_cdf_sf(a, x); ax = apm.gamma_paris_cdf_sf(a, x)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

14.2.3 Incomplete beta function, continued fractions (Peizer)

ctx.**beta_peizer_cdf_sf_pdf**(a, b, q, p)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

The integral can be calculated using continued fractions (see Peizer and Pratt [463]). This method provides rigorous error bounds for for `ipm.` and `apm.`. By transforming the problem if necessary (using the equation $I_x(a,b) = 1 - I_{1-x}(b,a)$), let P be a lefttail probability with $b - \frac{1}{2} \le (a+b-1)(1-x)$. Then

$$P = I_x(a,b) = \binom{n}{a} p^{b-1} q^a \frac{1}{(1 + u_1/(v_1 + u_2/(v2 + u3/(v_3 + \cdots))))}, \quad \text{where}$$

$$p = (1-x), \quad q = x, \quad n = a+b-1, \quad u_1 = \frac{-(b-1)q}{p}, \quad u_{2j} = \frac{j(n+j)q}{p},$$

$$u_{2j+1} = \frac{-(a+j)(b-j-1)q}{p}, \quad v_j = a+j, \quad j = 1, 2, \ldots$$

The approximants obtained by terminating at u_k/v_k for $k = 1, 2, 5, 6, 9, 10, \ldots$ decrease monotonically toward P and those for $k = 0, 3, 4, 7, 8, 11, 12, \ldots$ increase monotonically toward P as long as $k \le 2B - 1$, where B is the integer part of b; for $k \ge 2B - 2$, the even approximants approach P monotonically from above and the odd ones from below if B is even, vice versa if B is odd. The monotonicity is strict throughout except that, if b is an integer, the fraction terminates at $k = 2b - 2$.

For a combined fraction see Tretter and Walster [783].

Note

While the algorithm given above seems to offer an easy way to calculate the function in interval arithmetic, one needs to remember that forward recurrence of continuous fractions is entirely unstable in interval arithmetic (see Cuyt *et al.* [189], pages 154 - 159). Therefore one first needs to evaluate the algorithm using forward recurrence in floating point arithmetic to determine the index of the (likely) highest required approximant, and then again using backward recurrence to actually evaluate it in interval arithmetic.

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; a = 8.3; b = 10.4; x = 0.7
>>> dx = dec.beta_peizer_cdf_sf_pdf(a, b, x); mx = mpm.beta_peizer_cdf_sf_pdf(a, b, x)
>>> ix = ipm.beta_peizer_cdf_sf_pdf(a, b, x); fx = fpm.beta_peizer_cdf_sf_pdf(a, b, x)
>>> gx = gmp.beta_peizer_cdf_sf_pdf(a, b, x); ax = apm.beta_peizer_cdf_sf_pdf(a, b, x)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

14.2.4 Noncentral χ^2 distribution, pdf, cdf and sf (Boost)

`ctx.chi2_nc_benton_cdf_sf`(*x*, *n*, *lambda1*, *cdf=True*, ***options*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns $\text{cdf}_X(x)$, the cumulative distribution function, for `cdf=True`, or $\text{sf}_X(x)$, the survival function, for `cdf=False`, of a random variable X, noncentral chi-squared distribution with degrees of freedom $n > 0$, noncentrality parameter λ_1, and support interval $(0, +\infty)$. See also Wikipedia [1159], MathWorld [804], Patnaik [462], Penev and Raykov [464], Wang and Gray [789], Winterbottom [1447], BoostMath [64], Witkovský [1467], Johansson [384].

Noncentral CDF: Infinite series in terms of the central cdf:

The cdf of a noncentral chi-square variable with n degrees of freedom and λ is given by

$$F_{\chi^2}(n, x; \lambda) = e^{-\lambda/2} \sum_{j=0}^{\infty} \frac{(\lambda/2)^j}{j!} F_{\chi^2}(n + 2 + j, x)$$

where $F_{\chi^2}(n,\cdot)$ is the cdf of the (central) χ^2 distribution.

An example:

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; x = 12; nu = 10; l1 = 30
>>> dx = dec.chi2_nc_benton_cdf_sf(x, nu, l1); mx = mpm.chi2_nc_benton_cdf_sf(x, nu, l1)
>>> ix = ipm.chi2_nc_benton_cdf_sf(x, nu, l1); fx = fpm.chi2_nc_benton_cdf_sf(x, nu, l1)
>>> gx = gmp.chi2_nc_benton_cdf_sf(x, nu, l1); ax = apm.chi2_nc_benton_cdf_sf(x, nu, l1)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

14.2.5 Noncentral Student t distribution, pdf, cdf and sf (Boost)

`ctx.student_t_nc_benton_cdf_sf`(*x*, *nu*, *delta*, *cdf=True*, ***options*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns $\mathrm{cdf}_X(x)$, the cumulative distribution function, for `cdf=True`, or $\mathrm{sf}_X(x)$, the survival function, for `cdf=False`, of a random variable X, following a noncentral t-distribution with $n > 0$ degrees of freedom, noncentrality parameter δ, and support interval $(-\infty, +\infty)$. See also Wikipedia [1160], MathWorld [806], BoostMath [66], Benton and Krishnamoorthy [30], Broda and Paolella [160], Owen [452], Wang and Gray [789], Witkovský [1454], Johansson [384].

The pdf of a variable following a noncentral t-distribution with n degrees of freedom and noncentrality parameter δ is given by (boost_math)

$$f_{t'}(n,x,\delta) = \frac{nt}{n^2+2nt^2+t^4} + \frac{1}{2}\sum_{i=0}^{\infty} P_i I'_x\left(i+\frac{1}{2},\frac{n}{2}\right) + \frac{\delta}{\sqrt{2}} Q_i I'_x\left(i+1,\frac{n}{2}\right), \quad \text{and}$$

$I'_x(\cdot,\cdot)$ denotes the density of the beta distribution (see section ref{BetaDistributionDensity}), and P_i and Q_i are defined in equation (eq:NonCentralTSeriesCoeff).

The cdf of a variable following a noncentral t-distribution with n degrees of freedom and noncentrality parameter δ is given by (Benton, 2003)

$$F_{t'}(n,x,\delta) = \Phi(-\delta) + \frac{1}{2}\sum_{i=0}^{\infty} P_i I_x\left(i+\frac{1}{2},\frac{n}{2}\right) + \frac{\delta}{\sqrt{2}} Q_i I_x\left(i+1,\frac{n}{2}\right), \quad \text{and}$$

$$1 - F_{t'}(n,x,\delta) = \frac{1}{2}\sum_{i=0}^{\infty} P_i I_y\left(\frac{n}{2},i+\frac{1}{2}\right) + \frac{\delta}{\sqrt{2}} Q_i I_y\left(\frac{n}{2},i+1\right), \quad \text{where}$$

$$\lambda = \tfrac{1}{2}\delta^2; \quad P_i = \frac{e^{-\lambda}\lambda^i}{i!}; \quad Q_i = \frac{e^{-\lambda}\lambda^i}{\Gamma(i+3/2)}; \quad x = \frac{t^2}{n+t^2}; \quad y = 1-x,$$

$I_x(\cdot,\cdot)$ denotes the (normalized) incomplete beta function, and $\Phi(\cdot)$ denotes the cdf of the normal distribution.

An example:

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; x = 20.2; nu = 10; d = 30
>>> dx = dec.student_t_nc_benton_cdf_sf(x, n, d); mx = mpm.student_t_nc_benton_cdf_sf(x, n, d)
>>> ix = ipm.student_t_nc_benton_cdf_sf(x, n, d); fx = fpm.student_t_nc_benton_cdf_sf(x, n, d)
>>> gx = gmp.student_t_nc_benton_cdf_sf(x, n, d); ax = apm.student_t_nc_benton_cdf_sf(x, n, d)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
```

(continues on next page)

(continued from previous page)

```
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

14.2.6 Noncentral Beta distribution, pdf, cdf and sf (Boost)

`ctx.beta_nc_benton_cdf_sf(`*x*, *a*, *b*, *lambda1*`)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns simulataneously $\text{pdf}_X(x)$, the probability density function, $\text{cdf}_X(x)$, the cumulative distribution function, and $\text{sf}_X(x)$, the survival function, of a random variable X, following a noncentral Beta distribution with shape parameters a and b, noncentrality parameter λ_1 and the support interval $(0, 1)$. See also Wikipedia [1158], BoostMath [63], Wang and Gray [789], Witkovský [1466], Johansson [384].

CDF: Infinite Series:

The cdf of a variable following a (singly) noncentral F-distribution with n and m degrees of freedom and noncentrality parameter λ_1 and is given by

$$\Pr(F \le x) = F_{F'}(x; m, n, \lambda) = e^{-\lambda} \sum_{j=0}^{\infty} \frac{(\lambda/2)^j}{j!} F(m + 2j, n, x)$$

where $F_F(\cdot)$ denotes the cdf of the central F-distribution.

An example:

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; x = '0.3'; a = '10'; b = '20'; l1 = '30'
>>> dx = dec.beta_nc_benton_cdf_sf(x, a, b, l1); mx = mpm.beta_nc_benton_cdf_sf(x, a, b, l1)
>>> ix = ipm.beta_nc_benton_cdf_sf(x, a, b, l1); fx = fpm.beta_nc_benton_cdf_sf(x, a, b, l1)
>>> gx = gmp.beta_nc_benton_cdf_sf(x, a, b, l1); ax = apm.beta_nc_benton_cdf_sf(x, a, b, l1)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

14.2.7 Noncentral F distribution, pdf, cdf and sf (Benton)

`ctx.fisher_f_nc_benton_cdf_sf(`*x*, *m*, *n*, *lambda1*`)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns simulataneously $\text{pdf}_X(x)$, the probability density function, $\text{cdf}_X(x)$, the cumulative distribution function, and $\text{sf}_X(x)$, the survival function, of a random variable X, following a noncentral F distribution with degrees of freedom m and n, noncentrality parameter λ_1 and the support interval $(0, \infty)$. See also Wikipedia [1158], BoostMath [63], Wang and Gray [789], Witkovský [1466], Johansson [384].

CDF: Infinite Series:

The cdf of a variable following a (singly) noncentral F-distribution with n and m degrees of freedom and noncentrality parameter λ_1 and is given by

$$\Pr(F \le x) = F_{F'}(x; m, n, \lambda) = e^{-\lambda} \sum_{j=0}^{\infty} \frac{(\lambda/2)^j}{j!} F(m + 2j, n, x)$$

where $F_F(\cdot)$ denotes the cdf of the central F-distribution.

An example:

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; x = '0.3'; m = '10'; n = '20'; l1 = '30'
>>> dx = dec.fisher_f_nc_benton_cdf_sf(x,m,n,l1); mx = mpm.fisher_f_nc_benton_cdf_sf(x,m,n,l1)
>>> ix = ipm.fisher_f_nc_benton_cdf_sf(x,m,n,l1); fx = fpm.fisher_f_nc_benton_cdf_sf(x,m,n,l1)
>>> gx = gmp.fisher_f_nc_benton_cdf_sf(x,m,n,l1); ax = apm.fisher_f_nc_benton_cdf_sf(x,m,n,l1)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

14.2.8 Pearson's ρ distribution, cdf and sf (Hotelling's series)

`ctx.pearson_rho_nc_ht_cdf`(r, N, *rho*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns simulaneously $\mathrm{cdf}_X(r)$, the cumulative distribution function, and $\mathrm{sf}_X(r)$, the survival function, of a random variable X, following the distribution of Pearson's rho (the distribution of the sample correlation coefficient), with sample size $N \geq 3$, noncentrality parameter $\rho \in (-1, +1)$ and support interval $(-1, +1)$. See also Wikipedia [1163], MathWorld [793], Hotelling [373], Guenther [353], Winterbottom [1447], Winterbottom [1448], Odeh [424], Ruben [491], Subrahmaniam and Subrahmaniam [506].

Hotelling (1953) defines $Q_N(r;\rho) = \Pr(\rho < R < r)$ and develops $Q_N(r;\rho)$ in the following uniformly convergent series for $-1 < \rho < r < 1$.

$$Q_N(r,\rho) = K_1 \sum_{j=0}^{\infty} \frac{(1 \cdot 3 \cdots (2j-1))^2 S_j}{j! 2^{2j} \cdot (2N+1) \cdots (2N+2j-1)},$$

where K_1 and S_j are defined in equations (ref{eq:PearsonRho_K1}) and (ref{eq:PearsonRho_Hotelling_Sj}), respectively. From the relationships

$$P_N(r,\rho) = 1 - F_R(r,N;\rho) = Q_N(1,\rho) - Q_N(r,\rho)$$

$$P_N(-1,\rho) = 1$$

$$F_R(r,N;\rho) = 1 - P_N(r,\rho)$$

$$F_R(-r,N;-\rho) = 1 - F_R(r,N;\rho)$$

we can compute $F_N(r;\rho)$ for any value of r and ρ with $-1 \leq r \leq 1$, $-1 < \rho < 1$. Hotelling shows that the error committed by truncating the series at any point is less than $\frac{2}{1-|\rho|}$ times the last term used. However, it is important to note that the series converges very slowly for small values of N, and in this case a large number of terms must be computed.

$$S_j = \sum_{k=0}^{j} \binom{j}{k} (-1)^k \, \tfrac{1}{2}(1-\rho^2)^k \, 2^{j-k} N_k$$

$$N_k = \sum_{s=0}^{\infty} \frac{\Gamma\left(\frac{3}{2}-k\right)}{\Gamma\left(\frac{3}{2}-k-s\right) s!} \cdot I\left(\tfrac{1}{2}(s+1), \tfrac{1}{2}(n-1), \frac{(r-\rho)^2}{(1-\rho r)^2}\right),$$

where $I(a,b;x)$ denotes the Incomplete Beta Function (see section ref{sec:IncompleteBetaFunction}). Hotelling shows that in the evaluation of N_k for large s the absolute value of the ratio of the term of order $(s+1)$ to the term of order s is bounded by $|\rho(r-\rho)/(1-\rho r)|$, so that the series converges rapidly.

An example:

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; r = '0.3'; N = '10'; rho = '0.1'
>>> dx = dec.pearson_rho_nc_ht_cdf(r, N, rho); mx = mpm.pearson_rho_nc_ht_cdf(r, N, rho)
>>> ix = ipm.pearson_rho_nc_ht_cdf(r, N, rho); fx = fpm.pearson_rho_nc_ht_cdf(r, N, rho)
>>> gx = gmp.pearson_rho_nc_ht_cdf(r, N, rho); ax = apm.pearson_rho_nc_ht_cdf(r, N, rho)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

14.2.9 Pearson's ρ distribution, cdf and sf (Guenther's series)

`ctx.pearson_rho_nc_gt_cdf`(r, N, *rho*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns simulaneously $\text{cdf}_X(r)$, the cumulative distribution function, and $\text{sf}_X(r)$, the survival function, of a random variable X, following the distribution of Pearson's rho (the distribution of the sample correlation coefficient), with sample size $N \geq 3$, noncentrality parameter $\rho \in (-1, +1)$ and support interval $(-1, +1)$. See also Wikipedia [1163], MathWorld [793], Hotelling [373], Guenther [353], Winterbottom [1447], Winterbottom [1448], Odeh [424], Ruben [491], Subrahmaniam and Subrahmaniam [506].

The functions uses an algorithm by Guenther [353], :

Guenther writes $P_N(r;\rho) = \Pr(R > 0) - \Pr(0 < R < r)$ and develops $\Pr(0 < R < r)$ in an infinite series involving the Incomplete Beta Function denoted by $I(a, b; x)$. The result is

$$\Pr(R > 0) = \tfrac{1}{2}\left(1 + \text{sgn}(\rho) \cdot I\left(\tfrac{1}{2}(N-1), \tfrac{1}{2}; \rho^2\right)\right)$$

$$\begin{aligned} \Pr(0 < R < r) \quad &= \textstyle\sum_{j=0}^{\infty} K_1(j) \cdot I\left(\tfrac{1}{2}(N-2), \tfrac{1}{2}(2j+1); r^2\right) \\ &+ \textstyle\sum_{j=0}^{\infty} K_2(j) \cdot I\left(\tfrac{1}{2}(N-2), j+1; r^2\right) \end{aligned} \tag{14.3}$$

where $K_1(j), K_2(j)$ are defined recursively by

$$K_1(0) = \tfrac{1}{2}\left(1-\rho^2\right)^{\frac{1}{2}(N-1)}, \quad K_1(j) = \frac{2j+N-3}{2j}\rho^2 K_1(j-1)$$

$$K_2(0) = \frac{\Gamma\left(\frac{1}{2}N\right)}{\sqrt{\pi}\,\Gamma\left(\frac{1}{2}(N-1)\right)}\rho\left(1-\rho^2\right)^{\frac{1}{2}(N-1)}, \quad K_2(j) = \frac{2j+N-2}{2j+1}\rho^2 K_2(j-1)$$

These equations are used together to give $P_N(r;\rho)$. Guenther also obtains error bounds for truncating the infinite series.

An example:

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; r = '0.3'; N = '10'; rho = '0.1'
>>> dx = dec.pearson_rho_nc_gt_cdf(r, N, rho); mx = mpm.pearson_rho_nc_gt_cdf(r, N, rho)
>>> ix = ipm.pearson_rho_nc_gt_cdf(r, N, rho); fx = fpm.pearson_rho_nc_gt_cdf(r, N, rho)
>>> gx = gmp.pearson_rho_nc_gt_cdf(r, N, rho); ax = apm.pearson_rho_nc_gt_cdf(r, N, rho)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

14.2.10 Fisher's R^2 distribution, cdf and sf (Boost, Benton)

`ctx.fisher_r2_gd2_cdf`(*x*, *p*, *N*, *rho2*, ***options*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns $\text{pdf}_X(x)$, the probability density function (pdf) of a random variable X, following the distribution of Fisher's R^2 (the distribution of the square of the sample multiple correlation coefficient), with $p \geq 1$ predictor variables, sample size $N \geq p + 2$, noncentrality parameter $\rho^2 \in (0, 1)$ and the support interval $(0, 1)$. See also Lee [405], Lee [406], Gurland [355], Gurland and Milton [357], Gurland and Asiribo [356], Muirhead [416], Benton and Krishnamoorthy [30], Fisher [334], Gatsonis and Sampson [341].

Density: Infinite series:

The density function of the multiple sample correlation coefficient is given by citep{Ding_1996,Benton_2003}

$$f_{R^2}(x; p, N, \rho^2) = \sum_{i=0}^{\infty} f_{\text{NegBin}}\left((N-1)/2, i; 1-\rho^2\right) \times f_{\text{Beta}}\left(x; \tfrac{1}{2}(p-1)+i, \tfrac{1}{2}(N-p)\right)$$

where $f_{\text{NegBin}}(\cdot)$ denotes the pmf of the negative binomial distribution and $f_{\text{Beta}}(\cdot)$ denotes the pdf of the Beta distribution

CDF: Infinite series:

The CDF of the multiple sample correlation coefficient is given by citep{Ding_1996,Benton_2003}

$$F_{R^2}(x; p, N, \rho^2) = \sum_{i=0}^{\infty} f_{\text{NegBin}}\left((N-1)/2, i; 1-\rho^2\right) \times F_{\text{Beta}}\left(x; \tfrac{1}{2}(p-1)+i, \tfrac{1}{2}(N-p)\right)$$

where $f_{\text{NegBin}}(\cdot)$ denotes the pmf of the negative binomial distribution and $F_{\text{Beta}}(\cdot)$ denotes the CDF of the Beta distribution

CDF: Series of Gurland:

$$\Pr[F \leq x` = F_{R^2}(x; a, b, \rho^2) = \frac{b^m}{a^{n/2}} \sum_{j=0}^{\infty} c_j I(m+j, k, y) \quad \text{where}$$

$$z = F(p-1), \quad y = \frac{z}{z+(N-p)}, \quad a = \frac{1}{1-\rho^2}, \quad n = (N-p)/2, \quad m = (p-1)/2$$

$$c_0 = 1, \quad c_j = \frac{c_{j-1}(-n/2-j+1)\rho^2}{j}$$

An example:

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; x = '0.3'; p = '3'; N = '20'; rho2 = '0.6'
>>> dx = dec.fisher_r2_gd2_cdf(x, p, N, rho2); mx = mpm.fisher_r2_gd2_cdf(x, p, N, rho2)
>>> ix = ipm.fisher_r2_gd2_cdf(x, p, N, rho2); fx = fpm.fisher_r2_gd2_cdf(x, p, N, rho2)
>>> gx = gmp.fisher_r2_gd2_cdf(x, p, N, rho2); ax = apm.fisher_r2_gd2_cdf(x, p, N, rho2)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.1138774234168360557146160900744444149943E-1
mpm:  3.1138774234168360557146160900744444149943e-1
ipm:  3.1138774234168360557146160900744444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.1138774234168360557146160900744444149943E-01
ipm:  3.1138774234168360557146160900744444149943e-1 (4.055e-38%)
```

14.3 Finite series for lattice distributions, based on factorial moments

14.3.1 Fréchet's formula for calculating the pmf from the factorial moments

`ctx.frechet_pmf`(x, N)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

For lattice distributions, the pmf can be calculated from the factorial moments as follows (see Fréchet 1940, 1943):

$$\mathrm{pmf}_X(x) = \sum_{j=x}^{M} (-1)^{x+j} \binom{j}{x} \frac{\mu'_{[j]}}{j!}, \tag{14.4}$$

where $\mu'_{[j]}$ is the j^{th} factorial moment.

An example (pmf):

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; k = '34'; n = '100'; p = '0.5';
>>> dx = dec.binomial_pmf(k, n, p); mx = mpm.binomial_pmf(k, n, p)
>>> ix = ipm.binomial_pmf(k, n, p); fx = fpm.binomial_pmf(k, n, p)
>>> gx = gmp.binomial_pmf(k, n, p); ax = apm.binomial_pmf(k, n, p)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  4.581052772872401245494881411350031838140E-4
mpm:  4.581052772872401245494881411350031838141e-4
ipm:  4.581052772872401245494881411350031838141e-4 (4.894e-39%)
fpm:  4.58105277287240E-04
gmp:  4.581052772872401245494881411350031838141E-04
ipm:  4.581052772872401245494881411350031838141e-4 (4.894e-39%)
```

14.3.2 Laurent's formula for calculating the cdf from the factorial moments

`ctx.laurent_cdf`(x, N)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

For lattice distributions, the cdf can be calculated from the factorial moments as follows (see Laurent 1965):

$$\mathrm{cdf}_X(x) = \sum_{j=x}^{M} (-1)^{x+j} \binom{j-1}{x-1} \frac{\mu'_{[j]}}{j!}, \tag{14.5}$$

$$\mathrm{sf}_X(x) = 1 - \sum_{j=x}^{M} (-1)^{x+j} \binom{j-1}{x-1} \frac{\mu'_{[j]}}{j!}, \tag{14.6}$$

where $\mu'_{[j]}$ is the j^{th} factorial moment.

An example (cdf):

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; k = '34'; n = '100'; p = '0.5';
>>> dx = dec.binomial_cdf(k, n, p); mx = mpm.binomial_cdf(k, n, p)
>>> ix = ipm.binomial_cdf(k, n, p); fx = fpm.binomial_cdf(k, n, p)
>>> gx = gmp.binomial_cdf(k, n, p); ax = apm.binomial_cdf(k, n, p)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  8.949651957434262965349913219213965127993E-4
mpm:  8.949651957434262965349913219213965127993e-4
ipm:  8.949651957434262965349913219213965127993e-4 (6.263e-40%)
fpm:  8.94965195743426E-04
gmp:  8.949651957434262965349913219213965127993E-04
ipm:  8.949651957434262965349913219213965127993e-4 (6.263e-40%)
```

14.3.3 Binomial distribution, pmf, cdf

`ctx.binomial_fm_pmf`(x, N)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

The pmf and cdf are calculated using equations (14.4) and (14.5), respectively.

If a random variable X has a binomial distribution with success probability $p \in [0, 1]$ and number of trials n, then the factorial moments of X are

$$\mathrm{E}\big[(X)_r\big] = \binom{n}{r} p^r r! = (n)_r p^r = \frac{n!}{(n-r)!} p^r, \tag{14.7}$$

where by convention, $\binom{n}{r}$ is understood to be zero if $r > n$.

An example (pmf):

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; k = '34'; n = '100'; p = '0.5';
>>> dx = dec.binomial_pmf(k, n, p); mx = mpm.binomial_pmf(k, n, p)
>>> ix = ipm.binomial_pmf(k, n, p); fx = fpm.binomial_pmf(k, n, p)
>>> gx = gmp.binomial_pmf(k, n, p); ax = apm.binomial_pmf(k, n, p)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  4.581052772872401245494881411350031838140E-4
mpm:  4.581052772872401245494881411350031838141e-4
ipm:  4.581052772872401245494881411350031838141e-4 (4.894e-39%)
fpm:  4.58105277287240E-04
gmp:  4.581052772872401245494881411350031838141E-04
ipm:  4.581052772872401245494881411350031838141e-4 (4.894e-39%)
```

An example (cdf):

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; k = '34'; n = '100'; p = '0.5';
>>> dx = dec.binomial_cdf(k, n, p); mx = mpm.binomial_cdf(k, n, p)
>>> ix = ipm.binomial_cdf(k, n, p); fx = fpm.binomial_cdf(k, n, p)
>>> gx = gmp.binomial_cdf(k, n, p); ax = apm.binomial_cdf(k, n, p)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  8.949651957434262965349913219213965127993E-4
mpm:  8.949651957434262965349913219213965127993e-4
ipm:  8.949651957434262965349913219213965127993e-4 (6.263e-40%)
fpm:  8.94965195743426E-04
gmp:  8.949651957434262965349913219213965127993E-04
ipm:  8.949651957434262965349913219213965127993e-4 (6.263e-40%)
```

14.3.4 Classical hypergeometric distribution, pmf, cdf

`ctx.hypergeo_fm_pmf`(x, N)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

The pmf and cdf are calculated using equations (14.4) and (14.5), respectively.

If a random variable X has a hypergeometric distribution with population size N, number of success states $K \in \{0, ..., N\}$ in the population, and draws $n \in \{0, ..., N\}$, then the factorial moments of X are

$$\mathrm{E}\big[(X)_r\big] = \frac{\binom{K}{r}\binom{n}{r} r!}{\binom{N}{r}} = \frac{(K)_r (n)_r}{(N)_r}. \tag{14.8}$$

An example (pmf):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; k = 2; n = 3; K = 10; N = 30
>>> dx = dec.hypergeo_pmf(k, n, K, N); mx = mpm.hypergeo_pmf(k, n, K, N)
>>> ix = ipm.hypergeo_pmf(k, n, K, N); fx = fpm.hypergeo_pmf(k, n, K, N)
>>> gx = gmp.hypergeo_pmf(k, n, K, N); ax = apm.hypergeo_pmf(k, n, K, N)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  1.8890363589896245791764882498039876830 86E-2
mpm:  1.8890363589896245791764882498039876830 86e-2
ipm:  1.8890363589896245791764882498039876830 87e-2 (1.785e-37%)
fpm:  1.88903635898961E-02
gmp:  1.8890363589896245791764882498039876830 86E-02
ipm:  1.8890363589896245791764882498039876830 87e-2 (1.785e-37%)
```

An example (cdf):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; k = 2; n = 3; K = 10; N = 30
>>> dx = dec.hypergeo_cdf(k, n, K, N); mx = mpm.hypergeo_cdf(k, n, K, N)
>>> ix = ipm.hypergeo_cdf(k, n, K, N); fx = fpm.hypergeo_cdf(k, n, K, N)
>>> gx = gmp.hypergeo_cdf(k, n, K, N); ax = apm.hypergeo_cdf(k, n, K, N)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  9.4849098698563249924971611074760895382 77E-1
mpm:  9.4849098698563249924971611074760895382 77e-1
ipm:  9.4849098698563249924971611074760895382 76e-1 (6.051e-40%)
fpm:  9.48490986985633E-01
gmp:  9.4849098698563249924971611074760895382 77E-01
ipm:  9.4849098698563249924971611074760895382 76e-1 (6.051e-40%)
```

14.3.5 Wilcoxon distribution, pmf, cdf

`ctx.`**`wilcoxon_fm_pmf`**(x, N)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

The pmf and cdf are calculated using equations (14.4) and (14.5), respectively.

The factorial moments are calculated from the cumulants (see *factorial_moments_from_cumulants()*), and the cumulants are given by

$$\kappa_{2j} = \frac{2^{2j}(2^{2j}-1)B_{2j}}{2j}\sum_{i=1}^{N} r_i^{2j} = \frac{2^{2j}(2^{2j}-1)B_{2j}}{2j}\,\frac{B_{2j+1}(N+1)-B_{2j+1}}{2j+1}, \tag{14.9}$$

where $\kappa_1 = N(N+1)/4$, $\kappa_{2j+1} = 0$ for $j \geq 1$, and B_{2j} and $B_{2j}(x)$ are the Bernoulli numbers and polynomials, respectively, of degree $2j$.

An example (pmf):

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; x = '10'; N = '30';
>>> dx = dec.wilcoxon_pmf(x, N); mx = mpm.wilcoxon_pmf(x, N)
>>> ix = ipm.wilcoxon_pmf(x, N); fx = fpm.wilcoxon_pmf(x, N)
>>> gx = gmp.wilcoxon_pmf(x, N); ax = apm.wilcoxon_pmf(x, N)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  2.5038944623028604797946745445787433832 56E-2
mpm:  2.5038944623028604797946745445787433832 57e-2
ipm:  2.5038944623028604797946745445787433832 57e-2 (3.582e-39%)
fpm:  2.50389446230288E-02
gmp:  2.5038944623028604797946745445787433832 57E-02
ipm:  2.5038944623028604797946745445787433832 57e-2 (3.582e-39%)
```

An example (cdf):

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; x = '10'; N = '30';
>>> dx = dec.wilcoxon_cdf(x, N); mx = mpm.wilcoxon_cdf(x, N)
>>> ix = ipm.wilcoxon_cdf(x, N); fx = fpm.wilcoxon_cdf(x, N)
>>> gx = gmp.wilcoxon_cdf(x, N); ax = apm.wilcoxon_cdf(x, N)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  2.503894462302860479794674544578743383256E-2
mpm:  2.503894462302860479794674544578743383257e-2
ipm:  2.503894462302860479794674544578743383257e-2 (3.582e-39%)
fpm:  2.50389446230288E-02
gmp:  2.503894462302860479794674544578743383257E-02
ipm:  2.503894462302860479794674544578743383257e-2 (3.582e-39%)
```

14.3.6 Mann-Whitney distribution, pmf, cdf

`ctx.`**`mannwhitney_fm_pmf`**(x, N)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

The pmf and cdf are calculated using equations (14.4) and (14.5), respectively.

The factorial moments are calculated from the cumulants (see *factorial_moments_from_cumulants()*), and the cumulants are given by

$$\kappa_{2j} = \frac{B_{2j}}{2j(2j+1)}\left[B_{2j+1}(N_2+N_1+1) + B_{2j+1} - B_{2j+1}(N_1+1) - B_{2j+1}(N_2+1)\right] \tag{14.10}$$

and $\kappa_{2j+1} = 0$, $j \geq 1$, and B_{2j} and $B_{2j}(x)$ are the Bernoulli numbers and polynomials, respectively, of degree $2j$.

An example (pmf):

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; x = '10'; m = '20'; n = '20';
>>> dx = dec.mannwhitney_pmf(x, m, n); mx = mpm.mannwhitney_pmf(x, m, n)
>>> ix = ipm.mannwhitney_pmf(x, m, n); fx = fpm.mannwhitney_pmf(x, m, n)
>>> gx = gmp.mannwhitney_pmf(x, m, n); ax = apm.mannwhitney_pmf(x, m, n)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  2.503894462302860479794674544578743383256E-2
mpm:  2.503894462302860479794674544578743383257e-2
ipm:  2.503894462302860479794674544578743383257e-2 (3.582e-39%)
fpm:  2.50389446230288E-02
gmp:  2.503894462302860479794674544578743383257E-02
ipm:  2.503894462302860479794674544578743383257e-2 (3.582e-39%)
```

An example (CDF):

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; x = '10'; m = '20'; n = '20';
>>> dx = dec.mannwhitney_cdf(x, m, n); mx = mpm.mannwhitney_cdf(x, m, n)
>>> ix = ipm.mannwhitney_cdf(x, m, n); fx = fpm.mannwhitney_cdf(x, m, n)
>>> gx = gmp.mannwhitney_cdf(x, m, n); ax = apm.mannwhitney_cdf(x, m, n)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  2.503894462302860479794674544578743383256E-2
mpm:  2.503894462302860479794674544578743383257e-2
ipm:  2.503894462302860479794674544578743383257e-2 (3.582e-39%)
fpm:  2.50389446230288E-02
gmp:  2.503894462302860479794674544578743383257E-02
ipm:  2.503894462302860479794674544578743383257e-2 (3.582e-39%)
```

14.3.7 Kendall distribution, pmf, cdf

`ctx.kendall_fm_pmf`(x, N)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

The pmf is calculated using equation (14.4).

The factorial moments are calculated from the cumulants (see *factorial_moments_from_cumulants()*), and the cumulants are given by

$$\kappa_{2j}(T_N) = \frac{B_{2j}}{2j}\sum_{s=1}^{N} s^{2j} = \frac{B_{2j}}{2j}\left[\frac{B_{2j+1}(N+1) - B_{2j+1}}{2j+1} - N\right], \quad \text{and} \tag{14.11}$$

$$\kappa_{2j+1}(W_N) = 0, \quad \text{for } j \geq 1.$$

B_{2j} and $B_{2j}(x)$ are the Bernoulli numbers and polynomials, respectively, of degree $2j$.

An example (pmf):

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; x = '10'; N = '30';
>>> dx = dec.kendall_tau_pmf(x, N); mx = mpm.kendall_tau_pmf(x, N)
>>> ix = ipm.kendall_tau_pmf(x, N); fx = fpm.kendall_tau_pmf(x, N)
>>> gx = gmp.kendall_tau_pmf(x, N); ax = apm.kendall_tau_pmf(x, N)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  2.503894462302860479794674544578743383256E-2
mpm:  2.503894462302860479794674544578743383257e-2
ipm:  2.503894462302860479794674544578743383257e-2 (3.582e-39%)
fpm:  2.50389446230288E-02
gmp:  2.503894462302860479794674544578743383257E-02
ipm:  2.503894462302860479794674544578743383257e-2 (3.582e-39%)
```

An example (cdf):

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; x = '10'; N = '30';
>>> dx = dec.kendall_tau_cdf(x, N); mx = mpm.kendall_tau_cdf(x, N)
>>> ix = ipm.kendall_tau_cdf(x, N); fx = fpm.kendall_tau_cdf(x, N)
>>> gx = gmp.kendall_tau_cdf(x, N); ax = apm.kendall_tau_cdf(x, N)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  2.503894462302860479794674544578743383256E-2
mpm:  2.503894462302860479794674544578743383257e-2
ipm:  2.503894462302860479794674544578743383257e-2 (3.582e-39%)
fpm:  2.50389446230288E-02
gmp:  2.503894462302860479794674544578743383257E-02
ipm:  2.503894462302860479794674544578743383257e-2 (3.582e-39%)
```

14.3.8 Jonckheere-Terpsta T distribution, pmf, cdf

`ctx.jterpsta_fm_pmf`(x, N)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

The pmf and cdf are calculated using equations (14.4) and (14.5), respectively.

The factorial moments are calculated from the cumulants (see *factorial_moments_from_cumulants()*), and the cumulants are given by

$$\kappa_{2j} = \frac{B_{2j}}{2j(2j+1)}\left[B_{2j+1}(N+1) + (k-1)B_{2j+1} - \sum_{i=1}^{k} B_{2j+1}(n_i+1)\right] \tag{14.12}$$

where $\kappa_1 = M/2$, $\kappa_{2j+1} = 0$ for $j \geq 1$, and B_{2j} and $B_{2j}(x)$ are the Bernoulli numbers and polynomials, respectively, of degree $2j$.

An example (pmf):

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; x = '10'; k = '4'; n = '10';
>>> dx = dec.jterpsta_s_pmf(x, k, n); mx = mpm.jterpsta_s_pmf(x, k, n)
>>> ix = ipm.jterpsta_s_pmf(x, k, n); fx = fpm.jterpsta_s_pmf(x, k, n)
>>> gx = gmp.jterpsta_s_pmf(x, k, n); ax = apm.jterpsta_s_pmf(x, k, n)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  2.503894462302860479794674544578743383256E-2
mpm:  2.503894462302860479794674544578743383257e-2
ipm:  2.503894462302860479794674544578743383257e-2 (3.582e-39%)
fpm:  2.50389446230288E-02
gmp:  2.503894462302860479794674544578743383257E-02
ipm:  2.503894462302860479794674544578743383257e-2 (3.582e-39%)
```

An example (cdf):

```
>>> from xlcalcnet import dec, mpm, ipm, fpm, gmp, apm
>>> mpm.dps = 40; x = '10'; k = '4'; n = '10';
>>> dx = dec.jterpsta_s_cdf(x, k, n); mx = mpm.jterpsta_s_cdf(x, k, n)
>>> ix = ipm.jterpsta_s_cdf(x, k, n); fx = fpm.jterpsta_s_cdf(x, k, n)
>>> gx = gmp.jterpsta_s_cdf(x, k, n); ax = apm.jterpsta_s_cdf(x, k, n)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  2.503894462302860479794674544578743383256E-2
mpm:  2.503894462302860479794674544578743383257e-2
ipm:  2.503894462302860479794674544578743383257e-2 (3.582e-39%)
fpm:  2.50389446230288E-02
gmp:  2.503894462302860479794674544578743383257E-02
ipm:  2.503894462302860479794674544578743383257e-2 (3.582e-39%)
```

14.4 Efficient integration of bell-shaped functions

quad_bellshaped(*f*, **points*, ***kwargs*)

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Computes a single, double or triple integral over a given, 1D interval, 2D rectangle, or 3D cuboid, providing optionalle a guaranteed error bound.

14.4.1 Introduction

Some text explaining search for optimum and using 4 standard subintervals

14.4.2 Error function

`ctx.`**quad_erf**(a, x)

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Returns the error function of erf(z). See also BoostMath [74], Wikipedia [1229] , MathWorld [839], NIST [771], Mpmath [543]. The error function defined by

$$\mathrm{erf}(z) = \frac{2}{\sqrt{\pi}} \int_0^x e^{-z^2} \mathrm{d}t,$$

References for integration with erf(z) as argument:

https://math.stackexchange.com/questions/712434/erfaib-error-function-separate-into-real-and-imaginary-part

https://www.wolframalpha.com/input/?i=integrate+exp%28x%5E2%29

http://fredrikj.net/blog/2016/03/taking-the-error-out-of-the-error-function/

Bounds on the complex error function:

$$\mathrm{erf}(x + iy) = \mathrm{erf}x \pm ie^{-x^2}\mathrm{erfi}y \pm e^{-x^2}\mathrm{erfi}y.$$

14.4.3 Lower non-normalised incomplete gamma function, $\gamma(a, x)$ (Continued fractions)

`ctx.`**quad_gamma_lower**(a, x)

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Returns the real lower non-normalised incomplete gamma function $\gamma(a, x)$. See also Wikipedia [1218], MathWorld [844], NIST [457], BoostMath [81], Mpmath [548]. The function is defined as

$$\gamma(a, x) = \int_0^x t^{a-1} e^{-t} \mathrm{d}t$$

for $a \geq 0$ and $x \geq 0$.

14.4.4 Real upper non-normalised incomplete gamma function, $\Gamma(a, x)$ (Quadrature)

`ctx.`**quad_gamma_upper**(a, x)

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Returns the real lower non-normalised incomplete gamma function $\Gamma(a, x)$. See also Wikipedia [1218], MathWorld [844], NIST [457], BoostMath [81], Mpmath [548]. The function is defined as:

$$\Gamma(a, x) = \int_x^\infty t^{a-1} e^{-t} \mathrm{d}t$$

for $a \geq 0$ and $x \geq 0$.

14.4.5 Normalised incomplete beta function, $I_x(a,b)$

`ctx.quad_ibeta`(a, b, x)

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Returns the normalised incomplete beta function $I_x(a,b)$ for $a>0$, $b>0$, and $0 \le x \le 1$:

$$I_x(a,b) = \frac{B_x(a,b)}{B(a,b)}, \quad B_x(a,b) = \int_0^x t^{a-1}(1-t)^{b-1}\mathrm{d}t.$$

See also Wikipedia [1217], MathWorld [850], NIST [456], BoostMath [79], BoostMath [87], Mpmath [547].

```
>>> from mpformula import mp4
>>> mp4.dps = 30;
>>> matrix(2)
matrix(
[['0.0', '0.0'],
 ['0.0', '0.0']])
>>> matrix(2, 3)
```

14.4.6 Non-central chi-square cdf and sf (Chow)

`ctx.chi_squared_nc_quad_cdf`(n, x, *lambda*)

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

[Chou1985` gives the following representation for $n \ge 2$ and $\lambda \ge 0$:

$$F_{\chi^2}(n,x;\lambda) = \frac{2^{(1-n)/2}\sqrt{2\pi}}{\Gamma((n-1)/2))}\int_0^x y^{(n-3)/2}\phi\left(\sqrt{y}\right)\left[\Phi\left(\sqrt{x-y}-\sqrt{\lambda}\right)-\Phi\left(-\sqrt{x-y}-\sqrt{\lambda}\right)\right]\mathrm{d}y$$

where $\phi(\cdot)$ denotes the pdf of the normal distribution (see section ref{sec:NormalDistribution_pdf}) and $\Phi(\cdot)$ denotes the cdf of the normal distribution (see section ref{sec:NormalDistribution_CDF}).

14.4.7 Marcum Q function

`ctx.marcumq1`(a, b)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

The Marcum Q-function is defined as

$$Q(a,b) = \int_b^\infty x\exp\left(-\frac{x^2+a^2}{2}\right)I_0(ax)\,\mathrm{d}x$$

where $b \ge 0$, $a > 0$ and I_0 is the modified Bessel function of first kind of order 0. It is a special case of the generalized Marcum $Q_m(a,b)$ function with $m = 1$. It is made available as a separate function because it can be calculated in a particularly simple way.

Special cases are

$$Q(a,0) = 1, \quad Q(0,b) = e^{-b^2/2}, \quad Q(a,a) = \tfrac{1}{2}\left(1+\frac{I_0(a^2)}{\exp(a^2)}\right)$$

The function can also be evaluated as

$$Q(a,b) = \begin{cases} H(a,b), & a < b, \\ \frac{1}{2}+H(a,a), & a = b, \\ 1+H(a,b) & a > b, \end{cases}$$

where

$$H(a,b) = \frac{1}{\pi}\exp\left(-\frac{a^2+b^2}{2}\right)\int_0^\pi G(t)\exp(ab\cos(t))\mathrm{d}t, \quad \text{and}$$

$$G(t) = \begin{cases} \frac{1}{2}, & t = 0, a = b \\ \frac{1-z\cos(t)}{1-2z\cos(t)+z^2} & \text{otherwise, with } z = \frac{a}{b} \end{cases}$$

Available in Amath.

See also: https://en.wikipedia.org/wiki/Marcum_Q-function

See also: Short, 2012

See also Morales-Jimenez, 2013

See Marcum, 1960

```
>>> from xlcalcnet import dec, mpm, ipm
>>> mpm.dps = 40; a = '3.7'; b = '10.3'
>>> dx = dec.marcumq(a, b); mx = mpm.marcumq(a, b); ix = ipm.marcumq(a, b)
>>> mpm.show([dx, mx, ix])
dec:  3.4653770308369288610422290755224371774 83E-11
mpm:  3.4653770308369288610422290755224371774 83e-11
ipm:  3.4653770308369288610422290755224371774 86e-11 (9.641e-40%)

>>> from xlcalcnet import mpm, fpm, gmp, apm
>>> mpm.dps = 40; a = '3.7'; b = '10.3'
>>> fx = fpm.marcumq(a, b); gx = gmp.marcumq(a, b); ax = apm.marcumq(a, b)
>>> mpm.show([gx, fx, ax])
gmp:  3.4653770308369288610422290755224371774 83E-11
fpm:  3.46537703083691E-11
apm:  3.4653770308369288610422290755224371774 86e-11 (9.641e-40%)
```

14.4.8 Owen's T function

`ctx.owent`(*h*, *a*, *boost=True*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns Owen's T function $T(h,a)$. See also Wikipedia [1347], MathWorld [1008], Owen [451], and Patefield and Tand [461]. The function is defined by

$$T(h,a) = \frac{1}{2\pi}\int_0^a f(x)\mathrm{d}x = \frac{a}{4\pi}\int_{-1}^1 f(ax)\mathrm{d}x, \quad f(x) = \frac{e^{-\frac{1}{2}h^2(1+x^2)}}{1+x^2}, \quad (-\infty < h, a < +\infty)\,.$$

It has the following properties:

$$T(h,0) = 0$$

$$T(0,a) = \frac{1}{2\pi}\arctan(a)$$

$$T(-h,a) = T(h,a)$$

$$T(h,-a) = -T(h,a)$$

$$T(h,a) + T(ah,\frac{1}{a}) = \frac{1}{2}\left(\Phi(h)+\Phi(ah)\right) - \Phi(h)\Phi(ah) \quad \text{if} \quad a \geq 0$$

$$T(h,a) + T(ah,\frac{1}{a}) = \frac{1}{2}\left(\Phi(h)+\Phi(ah)\right) - \Phi(h)\Phi(ah) - \frac{1}{2} \quad \text{if} \quad a < 0$$

$$T(h,1) = \frac{1}{2}\Phi(h)\left(1-\Phi(h)\right).$$

```
>>> from xlcalcnet import dec, mpm, ipm
>>> mpm.dps = 40; h = 3.7; a = 10.3
>>> dx = dec.owent(h, a); mx = mpm.owent(h, a); ix = ipm.owent(h, a)
>>> mpm.show([dx, mx, ix])
dec:  5.3899866738694168468734716435226525868 97E-5
mpm:  5.3899866738694130740667774679411113471 02e-5
ipm:  5.3899866738694130740667774679411113471 02e-5 (6.5e-40%)

>>> from xlcalcnet import mpm, fpm, gmp, apm
>>> mpm.dps = 40; h = 3.7; a = 10.3
>>> fx = fpm.owent(h, a); gx = gmp.owent(h, a); ax = apm.owent(h, a)
>>> mpm.show([gx, fx, ax])
gmp:  5.3899866738694168468734716435226525868 97E-05
fpm:  5.38998667386941E-05
apm:  5.3899866738694130740667774679411113471 02e-5 (6.5e-40%)

>>> fx = fpm.owent(h, a); mpm.show([fx]) # boost
fpm:  5.38998667386941E-05
>>> fx = fpm.owent(h, a, False); mpm.show([fx]) # amath
fpm:  5.38998667386941E-05
```

14.5 Verified numerical integration

14.5.1 Error function

`ctx.quad_erf_verified`(a, x)

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Returns the error function of $\mathrm{erf}(z)$. See also BoostMath [74], Wikipedia [1229] , MathWorld [839], NIST [771], Mpmath [543]. The error function defined by

$$\mathrm{erf}(z) = \frac{2}{\sqrt{\pi}} \int_0^x e^{-z^2} \mathrm{d}t,$$

Bounds on the complex error function:

$$\mathrm{erf}(x + iy) = \mathrm{erf}x \pm ie^{-x^2}\mathrm{erfi}y \pm e^{-x^2}\mathrm{erfi}y.$$

14.5.2 Lower non-normalised incomplete gamma function, $\gamma(a, x)$ (Continued fractions)

`ctx.quad_gamma_lower_verified`(a, x)

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Returns the real lower non-normalised incomplete gamma function $\gamma(a, x)$. See also Wikipedia [1218], MathWorld [844], NIST [457], BoostMath [81], Mpmath [548]. The function is defined as

$$\gamma(a, x) = \int_0^x t^{a-1} e^{-t} \mathrm{d}t$$

for $a \geq 0$ and $x \geq 0$.

14.5.3 Real upper non-normalised incomplete gamma function, $\Gamma(a, x)$ (Quadrature)

`ctx.quad_gamma_upper_verified`(a, x)

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Returns the real lower non-normalised incomplete gamma function $\Gamma(a, x)$. See also Wikipedia [1218], MathWorld [844], NIST [457], BoostMath [81], Mpmath [548]. The function is defined as:

$$\Gamma(a, x) = \int_x^\infty t^{a-1} e^{-t} \mathrm{d}t$$

for $a \geq 0$ and $x \geq 0$.

14.5.4 Normalised incomplete beta function, $I_x(a, b)$

`ctx.quad_ibeta_verified`(a, b, x)

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

Returns the normalised incomplete beta function $I_x(a, b)$ for $a > 0$, $b > 0$, and $0 \leq x \leq 1$:

$$I_x(a, b) = \frac{B_x(a, b)}{B(a, b)}, \quad B_x(a, b) = \int_0^x t^{a-1}(1 - t)^{b-1} \mathrm{d}t.$$

See also Wikipedia [1217], MathWorld [850], NIST [456], BoostMath [79], BoostMath [87], Mpmath [547].

```
>>> from mpformula import mp4
>>> mp4.dps = 30;
>>> matrix(2)
matrix(
[['0.0', '0.0'],
 ['0.0', '0.0']])
>>> matrix(2, 3)
```

14.5.5 Non-central chi-square cdf and sf (Chow)

`ctx.chi_squared_nc_quad_cdf_verified`(*n*, *x*, *lambda*)

where `ctx` is `ipm`, `dec`, `mpm`, or `gmp`.

[Chou1985` gives the following representation for $n \geq 2$ and $\lambda \geq 0$:

$$F_{\chi^2}(n, x; \lambda) = \frac{2^{(1-n)/2}\sqrt{2\pi}}{\Gamma((n-1)/2))} \int_0^x y^{(n-3)/2} \phi(\sqrt{y}) \left[\Phi\left(\sqrt{x-y} - \sqrt{\lambda}\right) - \Phi\left(-\sqrt{x-y} - \sqrt{\lambda}\right)\right] \mathrm{d}y$$

where $\phi(\cdot)$ denotes the pdf of the normal distribution (see section ref{sec:NormalDistribution_pdf}) and $\Phi(\cdot)$ denotes the cdf of the normal distribution (see section ref{sec:NormalDistribution_CDF}).

14.5.6 Marcum Q function

`ctx.marcumq1_verified`(*a*, *b*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

The Marcum Q-function is defined as

$$Q(a, b) = \int_b^\infty x \exp\left(-\frac{x^2 + a^2}{2}\right) I_0(ax)\, \mathrm{d}x$$

where $b \geq 0$, $a > 0$ and I_0 is the modified Bessel function of first kind of order 0. It is a special case of the generalized Marcum $Q_m(a, b)$ function with $m = 1$. It is made available as a separate function because it can be calculated in a particularly simple way.

Special cases are

$$Q(a, 0) = 1, \quad Q(0, b) = e^{-b^2/2}, \quad Q(a, a) = \tfrac{1}{2}\left(1 + \frac{I_0(a^2)}{\exp(a^2)}\right)$$

The function can also be evaluated as

$$Q(a, b) = \begin{cases} H(a, b), & a < b, \\ \frac{1}{2} + H(a, a), & a = b, \\ 1 + H(a, b) & a > b, \end{cases}$$

where

$$H(a, b) = \frac{1}{\pi} \exp\left(-\frac{a^2 + b^2}{2}\right) \int_0^\pi G(t) \exp(ab\cos(t))\mathrm{d}t, \quad \text{and}$$

$$G(t) = \begin{cases} \frac{1}{2}, & t = 0, a = b \\ \frac{1 - z\cos(t)}{1 - 2z\cos(t) + z^2} & \text{otherwise, with } z = \frac{a}{b} \end{cases}$$

Available in Amath.

See also: https://en.wikipedia.org/wiki/Marcum_Q-function

See also: Short, 2012

See also Morales-Jimenez, 2013

See Marcum, 1960

```
>>> from xlcalcnet import dec, mpm, ipm
>>> mpm.dps = 40; a = '3.7'; b = '10.3'
>>> dx = dec.marcumq(a, b); mx = mpm.marcumq(a, b); ix = ipm.marcumq(a, b)
>>> mpm.show([dx, mx, ix])
dec:  3.4653770308369288610422290755224371774 83E-11
mpm:  3.4653770308369288610422290755224371774 83e-11
ipm:  3.4653770308369288610422290755224371774 86e-11 (9.641e-40%)

>>> from xlcalcnet import mpm, fpm, gmp, apm
>>> mpm.dps = 40; a = '3.7'; b = '10.3'
>>> fx = fpm.marcumq(a, b); gx = gmp.marcumq(a, b); ax = apm.marcumq(a, b)
>>> mpm.show([gx, fx, ax])
gmp:  3.4653770308369288610422290755224371774 83E-11
fpm:  3.46537703083691E-11
apm:  3.4653770308369288610422290755224371774 86e-11 (9.641e-40%)
```

14.5.7 Owen's T function

`ctx.owent_verified`(*h*, *a*, *boost=True*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns Owen's T function $T(h, a)$. See also Wikipedia [1347], MathWorld [1008], Owen [451], and Patefield and Tand [461].

See also: https://docs.scipy.org/doc/scipy/reference/generated/scipy.special.owens_t.html#scipy.special.owens_t

The function is defined by

$$T(h,a) = \frac{1}{2\pi}\int_0^a f(x)\mathrm{d}x = \frac{a}{4\pi}\int_{-1}^1 f(ax)\mathrm{d}x, \quad f(x) = \frac{e^{-\frac{1}{2}h^2(1+x^2)}}{1+x^2}, \quad (-\infty < h, a < +\infty)\,.$$

It has the following properties:

$$T(h,0) = 0$$

$$T(0,a) = \frac{1}{2\pi}\arctan(a)$$

$$T(-h,a) = T(h,a)$$

$$T(h,-a) = -T(h,a)$$

$$T(h,a) + T(ah,\frac{1}{a}) = \frac{1}{2}\left(\Phi(h)+\Phi(ah)\right) - \Phi(h)\Phi(ah) \quad \text{if} \quad a \geq 0$$

$$T(h,a) + T(ah,\frac{1}{a}) = \frac{1}{2}\left(\Phi(h)+\Phi(ah)\right) - \Phi(h)\Phi(ah) - \frac{1}{2} \quad \text{if} \quad a < 0$$

$$T(h,1) = \frac{1}{2}\Phi(h)\left(1-\Phi(h)\right).$$

```
>>> from xlcalcnet import dec, mpm, ipm
>>> mpm.dps = 40; h = 3.7; a = 10.3
>>> dx = dec.owent(h, a); mx = mpm.owent(h, a); ix = ipm.owent(h, a)
>>> mpm.show([dx, mx, ix])
dec:  5.3899866738694168468734716435226525868 97E-5
mpm:  5.3899866738694130740667774679411113471 02e-5
ipm:  5.3899866738694130740667774679411113471 02e-5 (6.5e-40%)

>>> from xlcalcnet import mpm, fpm, gmp, apm
>>> mpm.dps = 40; h = 3.7; a = 10.3
>>> fx = fpm.owent(h, a); gx = gmp.owent(h, a); ax = apm.owent(h, a)
>>> mpm.show([gx, fx, ax])
gmp:  5.3899866738694168468734716435226525868 97E-05
```

(continues on next page)

(continued from previous page)

```
fpm:  5.389986673869413074066777467941111347102e-5 (6.5e-40%)

>>> fx = fpm.owent(h, a); mpm.show([fx]) # boost
fpm:  5.389986673869413074066777467941111347102e-5 (6.5e-40%)
>>> fx = fpm.owent(h, a, False); mpm.show([fx]) # amath
fpm:  5.389986673869413074066777467941111347102e-5 (6.5e-40%)
```

CHAPTER

FIFTEEN

PMF VECTORS

15.1 Basic discrete (lattice) distribution functions

15.1.1 Poisson distribution, pmf vector

`ctx.`**`poisson_pmf_vector`**(*x*, *n*, *lambda*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns the vector of all pmf values of the Poisson distribution. The vector is returned as a nested list of Decimals or as a mp.matrix or as a iv.matrix. See also Wikipedia [1184], MathWorld [831], BoostMath [84] , and Witkovský [1485].

$\text{pmf}_X(x)$, the probability mass function (pmf) of a random variable X, following a Poisson distribution is given by:

$$\text{pmf}_X(x) = \frac{\mu^k}{k!}e^{-\mu}.$$

The following recursions are used for the pmf:

$$\Pr(X = k+1|n) = \frac{\lambda}{k+1}\Pr(X = k|n)$$

$$\Pr(X = k-1|n) = \frac{k}{\lambda}\Pr(X = k|n)$$

15.1.2 Binomial distribution, pmf vector

`ctx.`**`binomial_pmf_vector`**(*x*, *n*, *lambda*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns the vector of all pmf values of the binomial distribution. The vector is returned as a nested list of Decimals or as a mp.matrix or as a iv.matrix. See also Wikipedia [1168], MathWorld [812], BoostMath [71] , and Witkovský [1475].

$\text{pmf}_X(x)$, the probability mass function (pmf) of a random variable X, following an binomial distribution is given by:

$$\text{pmf}_X(x) = \binom{n}{k}p^k(1-p)^{n-k} = f_{\text{Beta}}(k+1, n-k+1, p)/(n+1).$$

and $f_{\text{Beta}}(\cdot)$ denote the pdf of the central beta distribution. The following recursions are used for the pmf:

$$\Pr(X = k+1|n) = \frac{(n-k)P}{(k+1)Q}\Pr(X = k|n),$$

$$\Pr(X = k-1|n) = \frac{kQ}{(n-k+1)P}\Pr(X = k|n).$$

15.1.3 Negative binomial distribution, pmf vector

`ctx.negative_binomial_pmf_vector(x, n, lambda)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns the vector of all pmf values of the negative binomial distribution. The vector is returned as a nested list of Decimals or as a mp.matrix or as a iv.matrix. See also Wikipedia [1183], MathWorld [828], BoostMath [83] , and Witkovský [1482].

$\text{pmf}_X(x)$, the probability mass function (pmf) of a random variable X, following an negative binomial distribution is given by:

$$\text{pmf}_X(x) = \frac{\Gamma(n+k)}{K!\Gamma(n)} P^n (1-P)^k.$$

and $f_{\text{Beta}}(\cdot)$ denotes the pdf of the central beta distribution. The following recursions are used for the pmf:

$$\Pr(X = k+1|n) = \frac{(n+k)(1-P)}{(k+1)} \Pr(X = k|n)$$

$$\Pr(X = k-1|n) = \frac{k}{(n-k+1)(1-P)} \Pr(X = k|n)$$

15.1.4 Hypergeometric distribution, pmf vector

`ctx.hypergeometric_pmf_vector(x, n, lambda)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns the vector of all pmf values of the hypergeometric distribution. The vector is returned as a nested list of Decimals or as a mp.matrix or as a iv.matrix.

See also Wikipedia [1174], MathWorld [820], BoostMath [78], Berkopec [31], and *dist_hypergeometric()*.

$\text{pmf}_X(x)$, the probability mass function (pmf) of a random variable X, following an hypergeometric distribution is given by:

$$\text{pmf}_X(x) = \frac{\binom{n_1}{k}\binom{n_2}{n-k}}{\binom{n_1+n_2}{n}}, \quad (n, n_1, n_2 \geq 0; n \leq n_1 + n_2).$$

The following recursions are used for the pmf:

$$f(k+1) = \frac{(n_1-k)(n-k)}{(k+1)(n_2-n+k+1)} f(k)$$

$$f(k-1) = \frac{k(n_2-n+k)}{(n_1-k+1)(n-k+1)} f(k)$$

15.1.5 Noncentral hypergeometric distribution (Fisher), pmf vector

`ctx.hypergeo_nc_pmf_vector(x, n, lambda)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns the vector of all pmf values of the noncentral hypergeometric distribution (Fisher). The vector is returned as a nested list of Decimals or as a mp.matrix or as a iv.matrix. See also: Wikipedia [1216], Johnson *et al.* [387] page 293.

$$\text{pmf}_X(x) = \text{h}(x; n_1, m_1, N, \theta) = \frac{\binom{n_1}{x}\binom{n_2}{m_1-x}\theta^x}{\binom{n_2}{m_1}{}_2F_1(-n_1, -m_1; n_2+1-m_1; \theta)},$$

where $\theta = p_1 q_2 / (q_1 p_2)$ and $\max(0, m_1 - n_2) \leq x \leq \min(n_1, m_1)$.

The following recursions are used for the PMF (see Wikipedia):

$$\mathrm{h}(x; n_1, m_1, N, \theta) = \frac{(m_1 - x + 1)(n_1 - x + 1)\theta}{x(m_2 - n_1 + x)} \mathrm{h}(x - 1; n_1, m_1, N, \theta)$$

15.2 Discrete (lattice) distribution functions related to (stratified) rank tests

15.2.1 Sign test distribution (under H_0), pmf vector

`ctx.signtest_pmf_vector`(*x*, *n*, *lambda*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns the vector of all pmf values of the Sign test distribution under H_0. The vector is returned as a nested list of Decimals or as a mp.matrix or as a iv.matrix.

See also Wikipedia [1190], vandeWiel [785], Bennett [29] and Zimmermann [1494], and *dist_wilcoxon()*.

Returns $\text{pmf}_X(x)$, the probability mass function (pmf) of a random variable X, following a Wilcoxon signed rank T distribution. The null distribution can be calculated as follows: Let $p_N(w)$ denote the probability $\Pr[W_N = w]$ in a sample of size N. Then the following recurrence relation holds (see Zimmermann [1494]) :

$$p_N(w) = \tfrac{1}{2}\left(p_{N-1}(w) + p_{N-1}(w-N)\right).$$

15.2.2 Wilcoxon T distribution (under H_0), pmf vector

`ctx.wilcoxon_pmf_vector`(*x*, *n*, *lambda*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns the vector of all pmf values of the Wilcoxon distribution under H_0. The vector is returned as a nested list of Decimals or as a mp.matrix or as a iv.matrix.

See also Wikipedia [1190], Fellingham and Stoker [298], vandeWiel [785], Bennett [29] and Zimmermann [1494], and *dist_wilcoxon()*.

Returns $\text{pmf}_X(x)$, the probability mass function (pmf) of a random variable X, following a Wilcoxon signed rank T distribution. The null distribution can be calculated as follows: Let $p_N(w)$ denote the probability $\Pr[W_N = w]$ in a sample of size N. Then the following recurrence relation holds (see Zimmermann [1494]) :

$$p_N(w) = \tfrac{1}{2}\left(p_{N-1}(w) + p_{N-1}(w-N)\right).$$

15.2.3 Wilcoxon T distribution (under Bennett alternatives), pmf vector

`ctx.wilcoxon_bennett_pmf_vector`(*x*, *n*, *lambda*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns the vector of all pmf values of the Wilcoxon T distribution under Bennett alternatives. The vector is returned as a nested list of Decimals or as a mp.matrix or as a iv.matrix.

See also Wikipedia [1190], Fellingham and Stoker [298], vandeWiel [785], Bennett [29] and Zimmermann [1494], and *dist_wilcoxon()*.

Returns $\text{pmf}_X(x)$, the probability mass function (pmf) of a random variable X, following a Wilcoxon signed rank T distribution. The null distribution can be calculated as follows: Let $p_N(w)$ denote the probability $\Pr[W_N = w]$ in a sample of size N. Then the following recurrence relation holds (see Zimmermann [1494]) :

$$p_N(w) = \tfrac{1}{2}\left(p_{N-1}(w) + p_{N-1}(w-N)\right).$$

15.2.4 Kendall S (or tau) distribution (under H_0), pmf vector

ctx.**kendall_tau_pmf_vector**(*x*, *n*, *lambda*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

Returns the vector of all pmf values of the Kendall S (or tau) distribution under H_0. The vector is returned as a nested list of Decimals or as a mp.matrix or as a iv.matrix. See also Wikipedia [1177], Noether [422], vandeWiel [785], and *dist_kendall()*.

Returns $\text{pmf}_X(x)$, the probability mass function (pmf) of a random variable X, following a Kendall tau distribution.

The null distribution can be calculated as follows: Let $p_N(t) = \Pr[T_N = t]$. Then the following recurrence relation holds:

$$p_N(t) = p_N(t-1) + [p_{N-1}(t) - p_{N-1}(t-N)]/N,$$

where $p_N(t) = 0$ for $t < 0$ or $t > N(N-1)/2$, and $p_N(0) = 1/N!$.

15.2.5 Mann-Whitney U distribution (under H_0), pmf vector

ctx.**mannwhitney_u_pmf_vector**(*x*, *n*, *lambda*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

Returns the vector of all pmf values of the Mann-Whitney U distribution under H_0. The vector is returned as a nested list of Decimals or as a mp.matrix or as a iv.matrix.

See also Wikipedia [1180], Murakami and Kamakura [418], Robillard [480], vandeWiel [785] and Zimmermann [1495], and *dist_mann_whitney()*.

Returns $\text{pmf}_X(x)$, the probability mass function (pmf) of a random variable X, following a Mann-Whitney U distribution. The null distribution of the MW test can be calculated as follows: Let $p_{n,m}(u)$ denote the probability that $U = u$ in samples of size n and m. Then (see Zimmermann [1495])

$$(m+n)p_{n,m}(u) = np_{n-1,m}(u-m) + mp_{n,m-1}(u) = np_{n-1,m}(u) + mp_{n,m-1}(u-n)$$

15.2.6 Jonckheere-Terpsta S distribution (under H_0), pmf vector

ctx.**jterpsta_s_pmf_vector**(*x*, *n*, *lambda*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

Returns the vector of all pmf values of the Jonckheere-Terpsta S distribution under H_0. The vector is returned as a nested list of Decimals or as a mp.matrix or as a iv.matrix.

See also Wikipedia [1176], Murakami and Kamakura [418], Robillard [480], vandeWiel [785], and Skillings [499] and *dist_jterpsta()*.

Returns $\text{pmf}_X(x)$, the probability mass function (pmf) of a random variable X, following a Jonckheere-Terpsta S distribution. Let $p(n_1, \ldots, n_k; t) = \Pr[J_N = t]$. If J_N is based on k independent samples of sizes $n_1, \ldots, n_k$, then (Skillings 1980):

$$p(n_1, \ldots, n_k; t) = \sum_x p(n_1, \ldots, n_k; x) \times p(n_1, \ldots, n_k; t-x)$$

where the sum is over all x with positive $p(\cdot)$.

15.2.7 Spearman ρ distribution (under H_0), pmf vector

ctx.**spearman_rho_pmf_vector**(*x*, *n*, *lambda*)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

Returns the vector of all pmf values of the Page L distribution under H_0. The vector is returned as a nested list of Decimals or as a mp.matrix or as a iv.matrix.

See also Wikipedia [1176], vandeWiel [785] and Skillings [499] .

Returns $\text{pmf}_X(x)$, the probability mass function (pmf) of a random variable X, following a Jonckheere-Terpsta S distribution. Let $p(n_1, \ldots, n_k; t) = \Pr[J_N = t]$. If J_N is based on k independent samples of sizes $n_1, \ldots, n_k$, then (Skillings 1980):

$$p(n_1, \ldots, n_k; t) = \sum_x p(n_1, \ldots, n_k; x) \times p(n_1, \ldots, n_k; t - x)$$

where the sum is over all x with positive $p(\cdot)$.

15.2.8 Page L distribution (under H_0), pmf vector

`ctx.page_l_pmf_vector(x, n, lambda)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns the vector of all pmf values of the Page L distribution under H_0. The vector is returned as a nested list of Decimals or as a mp.matrix or as a iv.matrix.

See also Wikipedia [1176], vandeWiel [785], and Skillings [499].

Returns $\text{pmf}_X(x)$, the probability mass function (pmf) of a random variable X, following a Jonckheere-Terpsta S distribution. Let $p(n_1, \ldots, n_k; t) = \Pr[J_N = t]$. If J_N is based on k independent samples of sizes $n_1, \ldots, n_k$, then (Skillings 1980):

$$p(n_1, \ldots, n_k; t) = \sum_x p(n_1, \ldots, n_k; x) \times p(n_1, \ldots, n_k; t - x)$$

where the sum is over all x with positive $p(\cdot)$.

15.2.9 Quade L distribution (under H_0), pmf vector

`ctx.quade_l_pmf_vector(x, n, lambda)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns the vector of all pmf values of the Quade L distribution under H_0. The vector is returned as a nested list of Decimals or as a mp.matrix or as a iv.matrix.

See also Wikipedia [1176], vandeWiel [785], and Skillings [499].

Returns $\text{pmf}_X(x)$, the probability mass function (pmf) of a random variable X, following a Jonckheere-Terpsta S distribution. Let $p(n_1, \ldots, n_k; t) = \Pr[J_N = t]$. If J_N is based on k independent samples of sizes $n_1, \ldots, n_k$, then (Skillings 1980):

$$p(n_1, \ldots, n_k; t) = \sum_x p(n_1, \ldots, n_k; x) \times p(n_1, \ldots, n_k; t - x)$$

where the sum is over all x with positive $p(\cdot)$.

15.2.10 Mann-Whitney U distribution (under Lehmann alternatives), pmf vector

`ctx.mannwhitney_u_lehmann_pmf_vector(x, n, lambda)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Lehmann alternatives are of the form $F_1(x) =: cite : t : `F_0(x)]^k$ or $F_1(x) = 1 - [1 - F_0(x)]^k$.

See also: Shorack [495], Shorack [496].

Under Lehmann alternatives, rank order probabilities can be expressed in closed form for $F_1 = (F_0)^k$: let $S_1, \ldots, S_n$ denote the ranks of Y in the combined sample, e.g. $\Pr[S_1 = 3, S_2 = 5)] = P_{3,2}(0, 0, 1, 0, 1)$. Then

$$\Pr[S_1 = s_1, \ldots, , S_n = s_n) = k^n \frac{n!m!}{\Gamma(n + m + 1 + n(k-1))} \prod_{j=1}^{n} \frac{\Gamma(s_j + j(k-1))}{\Gamma(s_j + (j-1)(k-1))}.$$

The exact distribution under this alternative can also be calculated using recurrence relations, similar to the null-distribution (Shorack_1966):

Let $p_{n,m}(u)$ denote the probability that $U = u$ in samples of size n and m. Then

$$(km + n)p_{n,m}(u) = np_{n-1,m}(u - m) + kmp_{n,m-1}(u) \quad \text{for } F_1 = (F_0)^k$$

$$(km + n)p_{n,m}(u) = np_{n-1,m}(u) + kmp_{n,m-1}(u - n) \quad \text{for } F_1 = 1 - (1 - F_0)^k$$

This recursive procedure allows the calculation of the exact noncentral distribution also for larger samples.

15.2.11 Mann-Whitney U distribution (under Milton alternatives), pmf vector

`ctx.`**`mannwhitney_u_milton_pmf_vector`**(*x*, *n*, *lambda*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns the vector of all pmf values of the Mann-Whitney U distribution under Milton alternatives. The vector is returned as a nested list of Decimals or as a mp.matrix or as a iv.matrix.

See also: Milton [413]

We consider k continuous random variables X_i with density functions f_i and sample sizes n_i, $i = 1 \ldots k$, and $N = n_1 + \ldots + n_k$.

Let $\mathbf{U} = (U_1, \ldots, U_N), U_1 < \cdots < U_N$, denote the order statistics of the random variables $(X_{1,1}, \ldots, X_{1,n_1}, \ldots, X_{k,1}, \ldots, X_{k,n_k})$, and let $\mathbf{Z} = (Z_1, \ldots, Z_N)$ denote a random vector of integers $1, 2, \ldots, k$, where the i^{th} component $\mathbf{Z}_i$ is i if U_i is an X_i.

If $\mathbf{z} = (z_1, \ldots, z_N)$ is a fixed vector of integers $1, 2, \ldots, k$ (with each i occurring n_i times), the probability of the rank order z, Pr $[\mathbf{Z} = \mathbf{z}]$, is given by

$$P_{n_1,\ldots,n_k}(\mathbf{z}|d) = n_1! \ldots n_k! \int_R \cdots \int \prod_{i=1}^{N} f_i(t_i) dt_i,$$

where the region of integration R is $-\infty < t_1 \leq t_2 \leq \cdots \leq t_N < \infty$

The original algorithm by Milton [413] has been developed for the normal distribution, but it has been found to also work well for the logistic distribution and for Lehmann alternatives, if the reference distribution is normal.

15.3 Discrete (non-lattice) distribution functions related to rank tests

15.3.1 Cochran S distribution (under H_0), pmf vector

`ctx.cochran_s_pmf_vector`(*x*, *n*, *lambda*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns the vector of all pmf values of the Cochran S distribution under H_0. The vector is returned as a nested list of Decimals or as a mp.matrix or as a iv.matrix.

See also Wikipedia [1176], vandeWiel [785], and Skillings [499].

Returns $\text{pmf}_X(x)$, the probability mass function (pmf) of a random variable X, following a Jonckheere-Terpsta S distribution. Let $p(n_1, \ldots, n_k; t) = \Pr[J_N = t]$. If J_N is based on k independent samples of sizes $n_1, \ldots, n_k$, then (Skillings 1980):

$$p(n_1, \ldots, n_k; t) = \sum_x p(n_1, \ldots, n_k; x) \times p(n_1, \ldots, n_k; t - x)$$

where the sum is over all x with positive $p(\cdot)$.

15.3.2 Friedman S distribution (under H_0), pmf vector

`ctx.friedman_s_pmf_vector`(*x*, *n*, *lambda*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns the vector of all pmf values of the Friedman S distribution under H_0. The vector is returned as a nested list of Decimals or as a mp.matrix or as a iv.matrix.

See also: https://www.statsdirect.com/help/nonparametric_methods/friedman.htm

See also Wikipedia [1176], vandeWiel [785] and Skillings [499].

Returns $\text{pmf}_X(x)$, the probability mass function (pmf) of a random variable X, following a Jonckheere-Terpsta S distribution. Let $p(n_1, \ldots, n_k; t) = \Pr[J_N = t]$. If J_N is based on k independent samples of sizes $n_1, \ldots, n_k$, then (Skillings 1980):

$$p(n_1, \ldots, n_k; t) = \sum_x p(n_1, \ldots, n_k; x) \times p(n_1, \ldots, n_k; t - x)$$

where the sum is over all x with positive $p(\cdot)$.

15.3.3 Quade S distribution (under H_0), pmf vector

`ctx.quade_s_pmf_vector`(*x*, *n*, *lambda*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns the vector of all pmf values of the Quade S distribution distribution under H_0. The vector is returned as a nested list of Decimals or as a mp.matrix or as a iv.matrix.

See also Wikipedia [1176], vandeWiel [785], and Skillings [499] .

Returns $\text{pmf}_X(x)$, the probability mass function (pmf) of a random variable X, following a Jonckheere-Terpsta S distribution. Let $p(n_1, \ldots, n_k; t) = \Pr[J_N = t]$. If J_N is based on k independent samples of sizes $n_1, \ldots, n_k$, then (Skillings 1980):

$$p(n_1, \ldots, n_k; t) = \sum_x p(n_1, \ldots, n_k; x) \times p(n_1, \ldots, n_k; t - x)$$

where the sum is over all x with positive $p(\cdot)$.

15.3.4 Kruskal-Wallis H distribution (under H_0), pmf vector

`ctx.`**`kruskal_wallis_h_pmf_vector`**(*x*, *n*, *lambda*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns the vector of all pmf values of the Kruskal-Wallis H distribution under H_0. The vector is returned as a nested list of Decimals or as a mp.matrix or as a iv.matrix.

See also Wikipedia [1176], Murakami and Kamakura [418], Robillard [480], vandeWiel [785], and Skillings [499] .

Returns $\text{pmf}_X(x)$, the probability mass function (pmf) of a random variable X, following a Jonckheere-Terpsta S distribution. Let $p(n_1, \ldots, n_k; t) = \Pr[J_N = t]$. If J_N is based on k independent samples of sizes $n_1, \ldots, n_k$, then (Skillings 1980):

$$p(n_1, \ldots, n_k; t) = \sum_x p(n_1, \ldots, n_k; x) \times p(n_1, \ldots, n_k; t - x)$$

where the sum is over all x with positive $p(\cdot)$.

CHAPTER

SIXTEEN

FAST APPROXIMATIONS

16.1 Approximations based on the normal distribution

16.1.1 Non-central chi-squared distribution: cdf and sf (Penev)

`ctx.chi2_nc_penev_cdf(`*x*, *nu*, *nc*`)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns an approximation to the cdf of the (non-)central chi-squared distribution.

[Penev2000` give the following first and second order Wiener germ approximation:

$$F_{\chi^2}(n,x;\lambda) \approx \Phi\left(\operatorname{sgn}(s)\sqrt{n(s-1)^2(1/(2s)+m-h(1-s)/s)-\log(A(s))+2B(s)/n}\right)$$

$$\text{where } m=\lambda/n;\quad h(y)=\frac{(1-y)\log(1-y)+y-\frac{1}{2}y^2}{y^2};\quad s=\frac{\sqrt{1+4xm/n}-1}{2m}$$

$$A(s)=\frac{1}{s}-\frac{2}{s}\cdot\frac{h(1-s)}{1+2ms};\quad B(s)=\frac{(1+3m)^2}{9(1+2m)^3}$$

where $\Phi(\cdot)$ denotes the cdf of the normal distribution (see).

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.cdisn_penev(x, nu, nc); mx = mpm.cdisn_penev(x, nu, nc)
>>> ix = ipm.cdisn_penev(x, nu, nc); fx = fpm.cdisn_penev(x, nu, nc)
>>> gx = gmp.cdisn_penev(x, nu, nc); ax = apm.cdisn_penev(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.1.2 (Non-central) chi-squared distribution: qtf and isf (Canal)

`ctx.chi2_nc_canal_qtf(`*LeftTail*, *RightTail*, *n*`)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns an approximation to the quantile of the (non-)central chi-squared distribution.

Let z_α and $\chi^2_{n,\alpha}$ be the α-quantiles of the standard normal distribution and central chi-square distribution with n the degrees of freedom. For $n=1$ and $n=2$, the following closed form expressions can be used:

$$\chi^2_{1,\alpha}=z^2_\alpha,\quad \chi^2_{2,\alpha}=2\log(1-\alpha)$$

At the extreme left tail of the distribution, for small x, the CDF of a χ^2 variable with n degrees of freedom can be approximated by the density of a χ^2 variable with $n+2$ degrees of freedom:

$$F_{\chi^2}(n,x) \approx 2f_{\chi^2}(n+2,x).$$

The density of a χ^2 variable with $n+2$ degrees of freedom can be inverted in closed form using the Lambert W function, which leads to the following approximation:

$$\chi^2_{n,\alpha} \approx f^{-1}_{\chi^2}(n+2,\alpha) = -2W(t)/a, \quad \text{where}$$

$$a = \frac{1}{(n+2)/2-1}, \quad k = \log(\Gamma((n+2)/2), \quad d = a - \log(1-\alpha) + k, \quad t = -ae^{p+d}$$

This approximation is used for $|t| < 0.1$, and the Lambert W function is approximated as

$$W(x) \approx x - x^2 + \tfrac{3}{2}x^3 - \tfrac{8}{3}x^4 - \tfrac{125}{24}x^5.$$

Otherwise, the quantile is approximated by inverting a formula proposed by Canal [170]:

$$\chi^2_{n,\alpha} \approx n\left(\frac{1}{2} + \frac{t}{2} - \frac{3}{2t}\right)^6, \quad \text{where}$$

$$t = \left(-5 + 2L + 2\sqrt{13 - 5L + L^2}\right)^{1/3}, \quad L = 6\left(m + s\left(z_\alpha + a(z_\alpha^2 - 1) - a^2(2z_\alpha^3 - 5z_\alpha)\right)\right)$$

$$m = \frac{5}{6} - \frac{1}{9n} - \frac{7}{648n^2} - \frac{25}{2187n^3}, \quad s^2 = \frac{1}{18n} + \frac{1}{162n^2} - \frac{37}{11664n^3}, \quad a = \frac{1}{162\sqrt{2n^3}} = \gamma_1/6.$$

The noncentral quantile is approximated as

$$\chi^2_{n,\lambda,\alpha} \approx (1+b)\chi^2_{n_1,\alpha}, \quad \text{where } n_1 = \frac{(n+\lambda)^2}{n+2\lambda}, \quad b = \frac{\lambda}{n+\lambda}$$

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.chi2_nc_canal_qtf(x, nu, nc); mx = mpm.chi2_nc_canal_qtf(x, nu, nc)
>>> ix = ipm.chi2_nc_canal_qtf(x, nu, nc); fx = fpm.chi2_nc_canal_qtf(x, nu, nc)
>>> gx = gmp.chi2_nc_canal_qtf(x, nu, nc); ax = apm.chi2_nc_canal_qtf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.1.3 Gamma distribution: qtf and isf (Canal)

`ctx.gamma_canal_qtf`(*LeftTail*, *RightTail*, *a*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns an approximation to the quantile of the gamma distribution.

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.gamma_canal_qtf(x, nu, nc); mx = mpm.gamma_canal_qtf(x, nu, nc)
>>> ix = ipm.gamma_canal_qtf(x, nu, nc); fx = fpm.gamma_canal_qtf(x, nu, nc)
>>> gx = gmp.gamma_canal_qtf(x, nu, nc); ax = apm.gamma_canal_qtf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.1.4 F distribution: qtf and isf (Davis)

`ctx.`**`fisher_f_davis_qtf`**(*LeftTail*, *RightTail*, *m*, *n*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns an approximation to the quantile of the F distribution.

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.fisher_f_davis_qtf(x, nu, nc); mx = mpm.fisher_f_davis_qtf(x, nu, nc)
>>> ix = ipm.fisher_f_davis_qtf(x, nu, nc); fx = fpm.fisher_f_davis_qtf(x, nu, nc)
>>> gx = gmp.fisher_f_davis_qtf(x, nu, nc); ax = apm.fisher_f_davis_qtf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.1.5 Beta distribution: qtf and isf (Davis)

`ctx.`**`beta_davis_qtf`**(*LeftTail*, *RightTail*, *a*, *b*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns an approximation to the quantile of the beta distribution.

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.beta_davis_qtf(x, nu, nc); mx = mpm.beta_davis_qtf(x, nu, nc)
>>> ix = ipm.beta_davis_qtf(x, nu, nc); fx = fpm.beta_davis_qtf(x, nu, nc)
>>> gx = gmp.beta_davis_qtf(x, nu, nc); ax = apm.beta_davis_qtf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.1.6 Pearson's rho distribution: pdf (Winterbottom)

`ctx.pearson_rho_wb_pdf`(x)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns an approximation to the pdf of Pearson's rho distribution. See also Winterbottom [1447], Winterbottom [1448].

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.pearson_rho_wb_pdf(x, nu, nc); mx = mpm.pearson_rho_wb_pdf(x, nu, nc)
>>> ix = ipm.pearson_rho_wb_pdf(x, nu, nc); fx = fpm.pearson_rho_wb_pdf(x, nu, nc)
>>> gx = gmp.pearson_rho_wb_pdf(x, nu, nc); ax = apm.pearson_rho_wb_pdf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.1.7 Pearson's rho distribution: cdf and sf (Winterbottom)

`ctx.pearson_rho_wb_cdf`(x)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns an approximation to the cdf of Pearson's rho distribution. See also Winterbottom [1447], Winterbottom [1448].

An improved approximation has been found by inverting Winterbottom's approximation for the confidence limits of ρ:

$$F_R(N, r, \rho) \approx \Phi\left(\frac{k}{6} - \frac{2c}{k} - \frac{b}{3}\right), \quad \text{where} \quad m = N - 1,$$

$$a = \frac{1}{12\sqrt{m^3}} + \frac{6r^4 - 3r^2 + 2}{48\sqrt{m^5}}, \quad b = \frac{-r3}{6am^2}, \quad s = \frac{1}{a\sqrt{m}} + \frac{1 + r^2}{4a\sqrt{m^3}} + \frac{11r^4 - 2r^2 + 1}{32a\sqrt{m^5}}$$

$$t = \frac{Z(r) - Z(\rho)}{a} + \frac{r}{2am} + \frac{5r^3 + 9r}{24am^2}, \quad d = t + \frac{bs}{3} - \frac{2b^3}{27}$$

$$c = s - b^2/3, \quad p = \sqrt{|12c^3 + 81d^2|}, \quad k = (108d + 12p)^{1/3}$$

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.pearson_rho_wb_cdf(x, nu, nc); mx = mpm.pearson_rho_wb_cdf(x, nu, nc)
>>> ix = ipm.pearson_rho_wb_cdf(x, nu, nc); fx = fpm.pearson_rho_wb_cdf(x, nu, nc)
>>> gx = gmp.pearson_rho_wb_cdf(x, nu, nc); ax = apm.pearson_rho_wb_cdf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.1.8 Pearson's rho distribution: qtf and isf (Winterbottom)

`ctx.pearson_rho_wb_qtf(`x`)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns an approximation to the qtf of Pearson's rho distribution. See also Winterbottom [1447], Winterbottom [1448].

Asymptotic expansions typically rely on the Fisher z-transform $Z(a) = \operatorname{atanh}(a)$ and its inverse $Z^{-1}(a) = \tanh(a)$.

Let $m = N - 1$ and let $u_\alpha = \Phi^{-1}(\alpha)$ be the lower 100α percentage point of the standard normal distribution. An approximation to the 100α percentage point r_α and the lower $100(1-\alpha)$ confidence limit on ρ, ρ_L, is then obtained by $r_\alpha \approx Z^{-1}(y_1)$, where

$$\begin{aligned} y_1 &= Z(\rho) + \frac{u_\alpha}{\sqrt{m}} + \frac{\rho}{2m} + \frac{u_\alpha^3 + 3(3-\rho^2)u_\alpha}{12\sqrt{m^3}} + \frac{4\rho^3 u_\alpha^2 + 15\rho - \rho^3}{24m^2} \\ &\quad + \frac{u_\alpha^5 + (-60\rho^4 + 30\rho^2 + 80)u_\alpha^3 + (45\rho^4 - 21\rho^2 + 375)u_\alpha}{480\sqrt{m^5}}, \quad \text{and} \end{aligned} \tag{16.1}$$

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.pearson_rho_wb_qtf(x, nu, nc); mx = mpm.pearson_rho_wb_qtf(x, nu, nc)
>>> ix = ipm.pearson_rho_wb_qtf(x, nu, nc); fx = fpm.pearson_rho_wb_qtf(x, nu, nc)
>>> gx = gmp.pearson_rho_wb_qtf(x, nu, nc); ax = apm.pearson_rho_wb_qtf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.1.9 Pearson's rho distribution: confidence limit for ρ (Winterbottom)

`ctx.pearson_rho_wb_cl(`x`)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns an approximation to the confidence interval (CI) for the noncentrality parameter ρ of Pearson's rho distribution, as decribed in Winterbottom [1448].

We use the Fisher z-transform $Z(a) = \operatorname{atanh}(a)$ and its inverse $Z^{-1}(a) = \tanh(a)$.

Let $m = N - 1$ and let $u_\alpha = \Phi^{-1}(\alpha)$ be the lower 100α percentage point of the standard normal distribution. An approximation to the 100α percentage point r_α and the lower $100(1-\alpha)$ confidence limit on ρ, ρ_L, is then obtained by $\rho_L \approx Z^{-1}(y_2)$, where

$$\begin{aligned} y_2 &= Z(r) + \frac{u_\alpha}{\sqrt{m}} - \frac{r}{2m} + \frac{u_\alpha^3 + 3(1+r^2)u_\alpha}{12\sqrt{m^3}} - \frac{4r^3 u_\alpha^2 + 5r^3 + 9r}{24m^2} \\ &\quad + \frac{u_\alpha^5 + (60r^4 - 30r^2 + 20)u_\alpha^3 + (165r^4 + 30r^2 + 15)u_\alpha}{480\sqrt{m^5}}. \end{aligned} \tag{16.2}$$

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.pearson_rho_wb_cl(x, nu, nc); mx = mpm.pearson_rho_wb_cl(x, nu, nc)
>>> ix = ipm.pearson_rho_wb_cl(x, nu, nc); fx = fpm.pearson_rho_wb_cl(x, nu, nc)
>>> gx = gmp.pearson_rho_wb_cl(x, nu, nc); ax = apm.pearson_rho_wb_cl(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.1.10 Singly noncentral t: pdf (Broda)

`ctx.student_t_nc_broda_pdf(`x`)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns an approximation to the pdf of the singly noncentral t distribution, as decribed in Witkovský [1454], using the approximation to the cdf of the singly noncentral t distribution as decribed Broda and Paolella [160].

$$f_{\text{StudentT}}(x,n,\delta) = \frac{n}{x}\left(F_{\text{StudentT}}\left(x\sqrt{(n+2)/n}, n+2, \delta\right) - F_{\text{StudentT}}(x,n,\delta)\right), \quad x \neq 0,$$

$$f_{\text{StudentT}}(x,n,\delta) = \frac{\Gamma((n+1)/2)}{\sqrt{n\pi}\Gamma(n/2)} e^{-\frac{1}{2}\delta^2}$$

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.student_t_nc_broda_pdf(x, nu, nc); mx = mpm.student_t_nc_broda_pdf(x, nu, nc)
>>> ix = ipm.student_t_nc_broda_pdf(x, nu, nc); fx = fpm.student_t_nc_broda_pdf(x, nu, nc)
>>> gx = gmp.student_t_nc_broda_pdf(x, nu, nc); ax = apm.student_t_nc_broda_pdf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.1.11 Singly noncentral t: cdf, sf (Broda)

`ctx.student_t_nc_broda_cdf(`x`)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns an approximation to the cdf of the singly noncentral t distribution, as decribed in Broda and Paolella [160].

Singly noncentral t: A saddlepoint approximation based on the joint cumulant generating function of (x_1, x_2), with $x_1 \sim N(\mu, 1)$ and $x_2 \sim \chi^2(n)$, is possible (see Broda (2007)), and takes the following form:

$$F_{t'}(x;n,\mu) = \Phi(w) + \phi(w)\left(\frac{1}{w} - \frac{d}{u}\right) + O(n^{-3/2}), \quad \text{where}$$

$$s = \left(\mu x + \sqrt{4n(x^2+n) + \mu^2 x^2}\right)/(2x^2+2n),$$

$$t_1 = -\mu + xs, \quad t_2 = -xt_1/(2ns), \quad d = 1/(t_1 s),$$

$$u = \sqrt{(\mu x s + 2n)/(2n)}/s, \quad w = \operatorname{sgn}(x-\mu)\sqrt{-\mu t_1 - 2n\log(s)},$$

and $\Phi(\cdot)$ and $\phi(\cdot)$ denote the cdf and pdf of the normal distribution, respectively.

For $\mu = 0$, these equations simplify to

$$s = \sqrt{n/(x^2+n)}, \quad d = 1/(xs), \quad u = 1/s, \quad w = \operatorname{sgn}(x)\sqrt{-2n\log(s)},$$

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.student_t_nc_broda_cdf(x, nu, nc); mx = mpm.student_t_nc_broda_cdf(x, nu, nc)
>>> ix = ipm.student_t_nc_broda_cdf(x, nu, nc); fx = fpm.student_t_nc_broda_cdf(x, nu, nc)
>>> gx = gmp.student_t_nc_broda_cdf(x, nu, nc); ax = apm.student_t_nc_broda_cdf(x, nu, nc)
```

(continues on next page)

(continued from previous page)

```
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.11387742341683605571461609007444414994 3E-1
mpm:  3.11387742341683605571461609007444414994 3e-1
ipm:  3.11387742341683605571461609007444414994 4e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.11387742341683605571461609007444414994 3E-01
ipm:  3.11387742341683605571461609007444414994 3e-1 (4.055e-38%)
```

16.1.12 Singly noncentral t: qtf, isf (Harley)

`ctx.student_t_nc_harley_qtf(`x`)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns an approximation to the qtf of the singly noncentral t distribution, as decribed in Harley [361].

The qtf of the noncentral t-distribution can be approximated by the qtf of Pearson's rho as follows: Let $N = f + 2$ and

$$\rho = \Re\left(\delta\sqrt{\frac{2}{2N - 3 + \delta^2}}\right).$$

Determine $r_{\alpha;\rho;N} = r_\alpha$, using Winterbottom's approximation. Calculate $t_{\alpha;\delta;f} = t_\alpha$ as

$$t_\alpha = \Re\left(\frac{r_\alpha}{1 - r_\alpha^2}\sqrt{\frac{2f(1-\rho^2)}{1-\rho^2}}\right)$$

Note that in these equations both ρ and r_α can assume values > 1. Luckily, Winterbottom's approximation can handle this; we always take only the real part of the functions results to avoid issues with the branch cuts of the complex square root.

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.student_t_nc_broda_qtf(x, nu, nc); mx = mpm.student_t_nc_broda_qtf(x, nu, nc)
>>> ix = ipm.student_t_nc_broda_qtf(x, nu, nc); fx = fpm.student_t_nc_broda_qtf(x, nu, nc)
>>> gx = gmp.student_t_nc_broda_qtf(x, nu, nc); ax = apm.student_t_nc_broda_qtf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.11387742341683605571461609007444414994 3E-1
mpm:  3.11387742341683605571461609007444414994 3e-1
ipm:  3.11387742341683605571461609007444414994 4e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.11387742341683605571461609007444414994 3E-01
ipm:  3.11387742341683605571461609007444414994 3e-1 (4.055e-38%)
```

16.1.13 Singly noncentral t: confidence limit for δ (Akahira)

`ctx.student_t_nc_akahira_cl(`x`)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns an approximation to the confidence interval (CI) for the noncentrality parameter of the singly noncentral t distribution, as decribed in Akahira *et al.* [6].

Let T be a statistic according to the non-central t-distribution with n degrees of freedom and a non-centrality parameter δ. Then the lower confidence limit $\widehat{\delta}$ of level $1 - \alpha$ and the two-sided confidence interval $(\underline{\delta}, \overline{\delta})$ of the non-centrality parameter δ of level $1 - \alpha$ are given by Akahira *et al.* [6]:

$$\widehat{\delta} = bT - z_\alpha\sqrt{k} + hT^3(z_\alpha^2 - 1)/k,$$

$$\underline{\delta} = bT - z_{\alpha/2}\sqrt{k} + hT^3(z_{\alpha/2}^2 - 1)/k,$$

$$\overline{\delta} = bT + z_{\alpha/2}\sqrt{k} - hT^3(z_{\alpha/2}^2 - 1)/k,$$

$$h = \frac{1}{24}\left(\frac{1}{n^2} + \frac{1}{4n^3}\right) \quad b = \sqrt{\frac{2}{n}}\frac{\Gamma(\frac{1}{2}n + \frac{1}{2})}{\Gamma(\frac{1}{2}n)}$$

where $k = 1 + (1 - b^2)T^2$, and z_α denotes the α-quantile of the normal distribution.

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.student_t_nc_akahira_cl(x, nu, nc); mx = mpm.student_t_nc_akahira_cl(x, nu, nc)
>>> ix = ipm.student_t_nc_akahira_cl(x, nu, nc); fx = fpm.student_t_nc_akahira_cl(x, nu, nc)
>>> gx = gmp.student_t_nc_akahira_cl(x, nu, nc); ax = apm.student_t_nc_akahira_cl(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.1138774234168360557146160900744444149943E-1
mpm:  3.1138774234168360557146160900744444149943e-1
ipm:  3.1138774234168360557146160900744444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.1138774234168360557146160900744444149943E-01
ipm:  3.1138774234168360557146160900744444149943e-1 (4.055e-38%)
```

16.1.14 Doubly noncentral t: cdf, sf (Broda)

`ctx.student_t_nc2_broda_cdf(`x`)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns an approximation to the cdf of the doubly noncentral t distribution, as decribed in Broda and Paolella [160].

A saddlepoint approximation based on the joint cumulant generating function of (x_1, x_2), with $x_1 \sim N(\mu, 1)$ and $x_2 \sim \chi^2(n, \theta)$, is possible (see Broda (2007)), and takes the following form:

$$F_{t''}(x; n; \mu, \theta) = \Phi(w) + \phi(w)\left(\frac{1}{w} - \frac{d}{u}\right) + O(n^{-3/2}), \quad \text{where}$$

$$a = x^4 + 2nx^2 + n^2, \quad c_2 = (-2x^3\mu - 2xn\mu)/a, \quad c_1 = (x^2\mu^2 - nx^2 - n^2 - \theta n)/a, \quad c_0 = (xn\mu)/a,$$

$$q = \tfrac{1}{3}c_1 - \tfrac{1}{9}c_2^2, \quad r = \tfrac{1}{6}(c_1c_2 - 3c_0) - \tfrac{1}{27}c_2^3,$$

$$s = \sqrt{-4q}\cos\left(\tfrac{1}{3}\arccos\left(r/\sqrt{-q^3}\right)\right) - \tfrac{1}{3}c_2,$$

$$t_1 = -\mu + xs, t_2 = -xt_1/(2ns), \quad d = 1/(t_1 s), \quad \nu = 1/(1 - 2t_2), \quad \alpha = \mu/\sqrt{1 + \theta/n},$$

$$u = \sqrt{(x^2 + 2nt_2)(2n\nu^2 + 4\theta\nu^3) + 4n^2s^2}/(2ns^2), \quad w = \operatorname{sgn}(x - \alpha)\sqrt{-\mu t_1 - n\log(\nu) - 2\theta\nu t_2},$$

and $\Phi(\cdot)$ and $\phi(\cdot)$ denote the cdf and pdf of the normal distribution, respectively.

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.student_t_nc2_broda_cdf(x, nu, nc); mx = mpm.student_t_nc2_broda_cdf(x, nu, nc)
>>> ix = ipm.student_t_nc2_broda_cdf(x, nu, nc); fx = fpm.student_t_nc2_broda_cdf(x, nu, nc)
>>> gx = gmp.student_t_nc2_broda_cdf(x, nu, nc); ax = apm.student_t_nc2_broda_cdf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.1138774234168360557146160900744444149943E-1
mpm:  3.1138774234168360557146160900744444149943e-1
ipm:  3.1138774234168360557146160900744444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.1138774234168360557146160900744444149943E-01
ipm:  3.1138774234168360557146160900744444149943e-1 (4.055e-38%)
```

16.1.15 Doubly noncentral t: qtf, isf (Broda)

`ctx.student_t_nc2_broda_qtf(x)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns an approximation to the qtf of the doubly noncentral t distribution, as decribed in Broda and Paolella [160].

Broda_2007_WorkingPaper proposes the following approximation:

$$F_{t''}(t;n;\mu,\theta) \approx F_{t'}(t/c;f;\mu), \quad \text{where}$$

$$f = \frac{7}{2}\left(-1+\sqrt{15-7g^2/h}\right)^{-1}, \quad c = \sqrt{h(1-2/f)}, \quad g = m_1/\sqrt{\mu^2/2}, h = m_2/(1+\mu^2),$$

$$m_1 = \mu\binom{n}{2}^{1/2}\frac{\Gamma((n-1)/2)}{\Gamma(n/2)}{}_1F_1\left(\frac{1}{2},\frac{n}{2},-\frac{\theta}{2}\right)$$

$$m_2 = (1+\mu^2)\frac{n}{n-2}{}_1F_1\left(\frac{2}{2},\frac{n}{2},-\frac{\theta}{2}\right)$$

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.student_t_nc2_broda_qtf(x, nu, nc); mx = mpm.student_t_nc2_broda_qtf(x, nu, nc)
>>> ix = ipm.student_t_nc2_broda_qtf(x, nu, nc); fx = fpm.student_t_nc2_broda_qtf(x, nu, nc)
>>> gx = gmp.student_t_nc2_broda_qtf(x, nu, nc); ax = apm.student_t_nc2_broda_qtf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.1.16 Spearman's rho, first 8 cumulants (David)

`ctx.spearman_mu8(N)`

where `ctx` is `dec`, `mpm`, `fpm`, `gmp` or `apm`.

Returns an approximation to the central distribution of Spearman's ρ, based on the first 8 moments.

Spearman's ρ is calculated like Pearsons's correlation coefficient, using the rank-transform on the x_i and y_i. The exact test for H_0 is the permutation test. Techniques for obtaining the exact distribution and approximations are given below

The first 8 cumulants are given by David *et al.* [199]

$$\kappa_2 = \frac{1}{n-1}$$

$$\kappa_4 = \frac{-6(19n^2+5n-36)}{25n(n+1)(n-1)^3}$$

$$\kappa_6 = \frac{48(583n^6+723n^5-2603n^4-2637n^3+4054n^2+2760n-1800)}{(245n^3(n-1)^5n1^3)}$$

$$\begin{aligned}\kappa_8 &= \frac{144(41939n^{10}-83709n^9+304254n^8+578442n^7-1012323n^6-1690125n^5)}{875n^5(n+1)^5(n-1)^7} \\ &+ \frac{144(1800776n^4+2358048n^3-1616688n^2-1080567n+846720)}{875n^5(n+1)^5(n-1)^7}\end{aligned} \tag{16.3}$$

Note: See PermCumulants.SpearmanCum for further details.

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.spearman_mu8(x, nu, nc); mx = mpm.spearman_mu8(x, nu, nc)
>>> ix = ipm.spearman_mu8(x, nu, nc); fx = fpm.spearman_mu8(x, nu, nc)
>>> gx = gmp.spearman_mu8(x, nu, nc); ax = apm.spearman_mu8(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.1138774234168360557146160900744444149943E-1
mpm:  3.1138774234168360557146160900744444149943e-1
ipm:  3.1138774234168360557146160900744444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.1138774234168360557146160900744444149943E-01
ipm:  3.1138774234168360557146160900744444149943e-1 (4.055e-38%)
```

16.1.17 Mann-Whitney U distribution: general alternatives specified by rank order probabilities (Sundrum)

`ctx.mannwhitney_nc_mu4`(N)

where `ctx` is `dec`, `mpm`, `fpm`, `gmp` or `apm`.

Returns an approximation to the noncentral distribution of Mann-Whitney's U, based on the first 4 moments.

The first 4 moments under the alternative are given by Sundrum [508] (note that $\kappa_4 = \mu_4 - 3\mu 2^3$):

$$\mu_1 = p$$

$$\mu_2 = (p^2 + p - q - r)/mn + (q - p^2)/n + (r - p^2)/m + p^2$$

$$\begin{aligned}\mu_3 &= 6(p^3 + u - pq - pr)/mn + (2p^3 + s - 3pq)/n^2 + (2p^3 + t - 3pr)/m^2 \\ &+ 3(3pq + 2(pr - u - p^3) + q - s - p^2)/mn^2 + 3(3pr + 2(pq - u - p^3) \\ &+ r - t - p^2)/m^2n + (4p^3 + 3p^2 + p + 6u + 2(s + t) - 3(q + r)(1 + 2p))/m^2n^2\end{aligned} \tag{16.4}$$

$$\begin{aligned}\mu_4 &= 3(q - p^2)2/n^2 + 6(q - p^2)(r - p^2)/mn + 3(r - p^2)2/m^2 \\ &+ (12qp^2 + a - 4sp - 3q^2 - 6p^4)/n^3 + (12rp^2 + b - 4tp - 3r2 - 6p^4)/m^3 \\ &+ 6(7(rp^2 - p^4) + 12qp^2 + qp + 2(w - sp) - 3(q^2 + qr) - 8up - p^3)/mn^2 \\ &+ (42qp^2 + 72rp^2 + 6rp + 12x - 42p^4 - 18r2 - 18qr - 12tp - 48up - 6p^3)/m^2n \\ &+ 6(6(p^4 - rp^2) + 3(q^2 - qp) - 12qp^2 + 4sp + 8up + 2(p^3 + qr - w) + s - a)/mn^3 \\ &+ (36p^4 + 18r2 + 12qr - 72rp^2 - 36qp^2 + 24tp - 6b + 48up \\ &- 12x + 12p^3 - 18rp + 6t)/m^3n \\ &+ (105p^4 + 42p^3 + 3p^2 + 33q^2 + 33r2 + 54qr - 174qp^2 - 174rp^2 - 42pq \\ &- 42pr + 36sp + 36tp + 192up - 36w - 36x + 6v + 36u)/m^2n^2 \\ &+ (132qp^2 + 108rp^2 - 66p^4 - 33q^2 - 36qr - 18r2 - 44sp - 24tp + 11a \\ &- 144up + 36w + 24x - 6v - 36p^3 - 36u - 7p^2 + 54pq + 36pr - 18s + 7q)/m^2n^3 \\ &+ (132rp^2 + 108qp^2 - 66p^4 - 33r2 - 36qr - 18q^2 - 44tp - 24sp + 11b \\ &- 144up + 24w + 36x - 6v - 36p^3 - 36u - 7p^2 + 54pr + 36pq - 18t + 7r)/m^3n^2 \\ &+ (6(3(q^2 + r2) - 12((q + r)p^2) + 4(p^3 + qr + sp + tp - w - x) - (a + b - v) + 16up \\ &- 6(p^4 + pq + pr + u) + 2(s + t)) - 7(q + r - p^2) + p)/m^3n^3\end{aligned} \tag{16.5}$$

The parameters $p, q, r, s, t, v, u, a, b, w$ and x can be calculated from the following rank order probabilities:

$$\begin{aligned} p &= P_{1,1}(0,0) \\ q &= P_{2,1}(0,0,1) \\ r &= P_{1,2}(0,1,1) \\ s &= P_{3,1}(0,0,0,1) \\ t &= P_{1,3}(0,1,1,1) \\ v &= P_{2,2}(0,0,1,1) \\ u &= v + (1/4)P_{2,2}(0,1,0,1) \\ a &= P_{4,1}(0,0,0,0,1) \\ b &= P_{1,4}(0,1,1,1,1) \\ w &= 2a + (2/3)P_{3,2}(0,0,1,0,1) + (1/6)P_{3,2}(0,1,0,0,1) \\ x &= 2b + (2/3)P_{2,3}(0,1,0,1,1) + (1/6)P_{2,3}(0,1,1,0,1) \end{aligned} \tag{16.6}$$

The rank order probabilities which are required for the calculation of the first 4 moments can be estimated from the sample as follows: Let U_i be the number of $Y `sinthesamplegreaterthan` X_{(i)}$, where $X_{(i)}$ is the ith ordered values of the X amongst themselves. Then the probabilities are calculated according to the following scheme :

$$P_{1,1}(0,1) = \frac{1}{mn}\sum_{i=1}^{m} U_i$$

$$P_{2,1}(0,0,1) = \frac{2}{mn(m-1)}\sum_{i=1}^{m}(i-1)U_i$$

$$P_{3,1}(0,0,0,1) = \frac{3}{mn(m-1)(m-2)}\sum_{i=1}^{m}(i-1)(i-2)U_i$$

$$P_{4,1}(0,0,0,0,1) = \frac{4}{mn(m-1)(m-2)(m-3)}\sum_{i=1}^{m}(i-1)(i-2)(i-3)U_i$$

$$P_{1,2}(0,1,1) = \frac{1}{mn(n-1)}\sum_{i=1}^{m} U_i(U_i-1)$$

$$P_{1,3}(0,1,1,1) = \frac{1}{mn(n-1)(n-2)}\sum_{i=1}^{m} U_i(U_i-1)(U_i-2)$$

$$P_{1,4}(0,1,1,1,1) = \frac{1}{mn(n-1)(n-2)(n-3)}\sum_{i=1}^{m} U_i(U_i-1)(U_i-2)(U_i-3)$$

$$P_{2,2}(0,0,1,1) = \frac{2}{mn(m-1)(n-1)}\sum_{i=1}^{m}(i-1)U_i(U_i-1)$$

$$P_{3,2}(0,0,0,1,1) = \frac{3}{mn(m-1)(m-2)(n-1)}\sum_{i=1}^{m}(i-1)(i-2)U_i(U_i-1)$$

$$P_{2,3}(0,0,1,1,1) = \frac{2}{mn(m-1)(n-1)(n-2)}\sum_{i=1}^{m}(i-1)U_i(U_i-1)(U_i-2)$$

$$P_{2,2}(0,1,0,1) = \frac{4}{mn(m-1)(n-1)}\sum_{i=1}^{m}\sum_{j=i+1}^{m}(U_i-U_j)U_j$$

$$P_{3,2}(0,0,1,0,1) = \frac{12}{mn(m-1)(m-2)(n-1)} \sum_{i=1}^{m} \sum_{j=i+1}^{m} (i-1)(U_i - U_j)U_j$$

$$P_{3,2}(0,1,0,0,1) = \frac{12}{mn(m-1)(m-2)(n-1)} \sum_{i=1}^{m} \sum_{j=i+1}^{m} (i-j-1)(U_i - U_j)U_j$$

$$P_{2,3}(0,1,0,1,1) = \frac{6}{mn(m-1)(n-1)(n-2)} \sum_{i=1}^{m} \sum_{j=i+1}^{m} (U_i - U_j)U_j(U_j - 1)$$

$$P_{2,3}(0,1,0,1,1) = \frac{6}{mn(m-1)(n-1)(n-2)} \sum_{i=1}^{m} \sum_{j=i+1}^{m} (U_i - U_j)U_j(U_j - 1)$$

$$P_{2,3}(0,1,1,0,1) = \frac{6}{mn(m-1)(n-1)(n-2)} \sum_{i=1}^{m} \sum_{j=i+1}^{m} (U_i - U_j)(U_i - U_j - 1)U_j$$

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.mannwhitney_nc_mu4(x, nu, nc); mx = mpm.mannwhitney_nc_mu4(x, nu, nc)
>>> ix = ipm.mannwhitney_nc_mu4(x, nu, nc); fx = fpm.mannwhitney_nc_mu4(x, nu, nc)
>>> gx = gmp.mannwhitney_nc_mu4(x, nu, nc); ax = apm.mannwhitney_nc_mu4(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.1.18 First 4 moments of Kendalls τ in the general case (Sundrum)

`ctx.kendall_tau_nc_mu4(N)`

where `ctx` is `dec`, `mpm`, `fpm`, `gmp` or `apm`.

Returns an approximation to the noncentral distribution of Kendall's τ, based on the first 4 moments.

Consider k pairs of random variables $(x_1, y_1), \ldots, (x_k, y_k)$. Let $r_1, \ldots, r_k$ be a permutaton of $1, \ldots, k$ and let $s_1, \ldots, s_k$ be its reciprocal. We define as in Snow [501].

$P(r_1, \ldots, r_k)$ = Pr[if x's are ranked in order, ranks of corresponding y's are $r_1, \ldots, r_k$].

$P(r_1, \ldots, r_k)$ = Pr[if y's are ranked in order, ranks of corresponding x's are $s_1, \ldots, s_k$].

Let $H(t) = 1$ if $t > 0$ and $H(t) = 0$ otherwise. Then

$$P(r_1, \ldots, r_k) = k!P\left[\prod_{i=2}^{k} H(x_i - x_{i-1})H(y_{s_i} - y_{s_{i-1}})\right] = k!P\left[\prod_{i=2}^{k} H(y_i - y_{i-1})H(x_{r_i} - x_{r_{i-1}})\right]$$

The rank order probabilities can then be estimated from the sample as

$$\hat{P}_{(12)} = \frac{1}{n(n-1)} \sum_{i \neq j} I\left[(x_i - x_j)(y_i - y_j) > 0\right]$$

$$\hat{P}_{(123)} = \frac{1}{n(n-1)(n-2)} \sum_{i \neq j_1 \neq j_2} I\left[(x_i - x_{j_1})(y_i - y_{j_1})(x_i - x_{j_2})(y_i - y_{j_2}) > 0\right]$$

The first 4 moments of T_N are given as Sundrum [507]:

$$\mu_1 = p$$

$$\mu_2 = 2[p(1-p) + 2(k-p^2)(n-2)]/[n(n-1)]$$

$$\begin{aligned} \mu_3 &= 4[(t - 18kp + 10p^3)n^2 + (6k + 2u - 6p^2 - 5t + 72kp - 34p^3)n \\ &+ (p + 9p^2 + 30p^3 - 12k - 4u + 6t - 72kp)]/[n(n-1)]^2 \end{aligned} \tag{16.7}$$

$$\begin{aligned} \mu_4 &= 8[6(k-p^2)2n^4 + (6kp + 2y - 6p^3 - 16tp - 84k2 + 270kp^2 - 108p4)n^3 \\ &+ (1.5p^2 + 6t + 2b - 126kp - 24up - 18y + 75p^3 + 120tp + 426k2 - 1446kp^2 + 505.5p4)n^2 \\ &+ (14k + 12u - 15.5p^2 - 30t - 10b + 444kp + 96up + 52y - 213p^3 - 296tp - 924k2 \\ &+ 2988kp^2 - 943.5p4)n \\ &+ (p - 28k - 24u + 21p^2 + 36t + 12b - 432kp - 96up - 48y + 180p^3 + 240tp + 720k2 \\ &- 2160kp^2 + 630p4)]/[n(n-1)]^3 \end{aligned} \tag{16.8}$$

The parameters p, k, u, t, b, y can be calculated from the following rank order probabilities, writing $P_{(1423)}$ for the probility that the ranks of the Y occur in this order when the X are sorted in ascending order:

$$\begin{aligned} p &= P_{(12)} \\ u &= P_{(123)} \\ k &= P_{(123)} + \tfrac{1}{4}P_{(132)} \\ t &= 8(P_{(1234)} + P_{(1243))} + 6P_{(1342)} + 4P_{(1324)} + 2P_{(2143)} + P_{(2413)} + P_{(1432)} \\ b &= 15P_{(1234)} + 10P_{(1243)} + 5P_{(1324)} + 4P_{(1342)} + P_{(2143)} \\ y &= (160P_{(12453)} + 150(P_{(12435)} + P_{(12354))} + 125P_{(12345)} + 96P_{(21453)} + 90P_{(13254)} + 84P_{(13524)} \\ &+ 80P_{(13425)} + 64P_{(13452)} + 45P_{(21354)} + 40P_{(12543)} + 32(P_{(23514)} + P_{(14352)} + P_{(13542))} \\ &+ 24P_{(21543)} + 22P_{(24153)} + 20P_{(14325)} + 18P_{(14523)} + 16P_{(25143)} + 12(P_{(24513)} + P_{(14532))} \\ &+ 6(P_{(25314)} + P_{(15342))} + 4P_{(25413)} + 2(P_{(15432)} + P_{(35142)}))/5 \end{aligned} \tag{16.9}$$

When $(x_i, y_i), i = 1, 2, \ldots, k$, are normal variables with correlation ρ, then closed form expressions exist for p, k and u (writing $a = \arcsin(\rho)/\pi$ and $b = 2\arcsin\left(\frac{1}{2}\rho\right)/\pi$:

$$\begin{aligned} p &= \tfrac{1}{2} + a \\ k &= \tfrac{1}{4}(\tfrac{10}{9} + 4a + 4a^2 - b^2) \\ u &= \tfrac{3}{8}(\tfrac{4}{9} + 4a - 2b + 4a^2 - b^2) \end{aligned} \tag{16.10}$$

The parameters t, b and y have to be evaluated by numerical intergration of the rank order probabilities

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.kendall_tau_nc_mu4(x, nu, nc); mx = mpm.kendall_tau_nc_mu4(x, nu, nc)
>>> ix = ipm.kendall_tau_nc_mu4(x, nu, nc); fx = fpm.kendall_tau_nc_mu4(x, nu, nc)
>>> gx = gmp.kendall_tau_nc_mu4(x, nu, nc); ax = apm.kendall_tau_nc_mu4(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.1138774234168360557146160900744444149943E-1
mpm:  3.1138774234168360557146160900744444149943e-1
ipm:  3.1138774234168360557146160900744444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.1138774234168360557146160900744444149943E-01
ipm:  3.1138774234168360557146160900744444149943e-1 (4.055e-38%)
```

16.2 Approximations based on the chi-squared distribution

16.2.1 Non-Central chi-squared : cdf, sf (Patnaik)

`ctx.chi2_nc_mu2_cdf(`x`)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns an approximation to the cdf of the noncentral chi-squared distribution by matching the first 2 moments.

Patnaik [462] gives the following 2-moment approximation based on the central χ^2-distribution:

$$F_{\chi^2}(n, x; \lambda) \approx F_{\chi^2}(n_1, x_1;), \quad \text{where } n_1 = \frac{(n+\lambda)^2}{n+2\lambda}, \quad x_1 = \frac{x(n+\lambda)}{n+2\lambda}$$

where $F_{\chi^2}(n, \cdot)$ is the cdf of the (central) χ^2 distribution (see section ref{sec:ChiSquareDistribution_cdf}).

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.chi2_nc_mu2_cdf(x, nu, nc); mx = mpm.chi2_nc_mu2_cdf(x, nu, nc)
>>> ix = ipm.chi2_nc_mu2_cdf(x, nu, nc); fx = fpm.chi2_nc_mu2_cdf(x, nu, nc)
>>> gx = gmp.chi2_nc_mu2_cdf(x, nu, nc); ax = apm.chi2_nc_mu2_cdf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.2.2 Non-Central chi-squared: qtf, isf (Patnaik)

`ctx.chi2_nc_mu2_qtf(`x`)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns an approximation to the qtf of the noncentral chi-squared distribution.

The noncentral quantile is approximated as in Patnaik [462]:

$$\chi^2_{n,\lambda,\alpha} \approx (1+b)\chi^2_{n_1,\alpha}, \quad \text{where } n_1 = \frac{(n+\lambda)^2}{n+2\lambda}, \quad b = \frac{\lambda}{n+\lambda}$$

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.chi2_nc_mu2_qtf(x, nu, nc); mx = mpm.chi2_nc_mu2_qtf(x, nu, nc)
>>> ix = ipm.chi2_nc_mu2_qtf(x, nu, nc); fx = fpm.chi2_nc_mu2_qtf(x, nu, nc)
>>> gx = gmp.chi2_nc_mu2_qtf(x, nu, nc); ax = apm.chi2_nc_mu2_qtf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.2.3 Non-Central chi-squared: confidence limit for λ (Winterbottom)

`ctx.chi2_nc_wb_cl(`x`)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns an approximation to the confidence interval (CI) for the noncentrality parameter λ of noncentral chi-squared distribution, as decribed in Winterbottom [1448].

[Winterbottom1979` gives the following formula to determine the paramter λ of a noncentral χ^2 distribution with n degrees of freedom, so that $F_{\chi^2}(n, x; 0) = 1 - \alpha$ and $F_{\chi^2}(n, x; \lambda) = 1 - \beta$. Let c be the $1 - \alpha$ percentage point of a χ^2-distribution with n degrees of freedom, let x be the $1 - \beta$ percentage point of a $N(0, 1)$ distribution, and $T = (c - n)/n$, $Y = 2T + 1$. Then

$$\begin{aligned}\lambda \approx\ & nT + \sqrt{2nY}x + \frac{2((3T+2)x^2 + 3T + 1))}{3Y} - \frac{(6T+5)x^3 - (36T^2 + 42T + 17)x}{18\sqrt{nY^5/2}} \\ & + \frac{(324T^2 + 594T + 276)x^4}{405nY^4} - \frac{(1080T^3 + 2484T^2 + 976)x^2}{405nY^4} \\ & + \frac{1080T^3 + 1512T^2 + 612T + 148}{405nY^4} - \frac{(10368T^3 + 30780T^2 + 30564T + 10143)x^5}{9720\sqrt{n^3Y^{11}/2}} \\ & + \frac{(25920T^4 + 98928T^3 + 163080T^2 + 137544T + 47188)x^3}{9720\sqrt{n^3Y^{11}/2}} \\ & + \frac{(45360T^4 + 106704T^3 + 80460T^2 + 31092T + 13489)x}{9720\sqrt{n^3Y^{11}/2}}\end{aligned} \tag{16.11}$$

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.chi2_nc_wb_cl(x, nu, nc); mx = mpm.chi2_nc_wb_cl(x, nu, nc)
>>> ix = ipm.chi2_nc_wb_cl(x, nu, nc); fx = fpm.chi2_nc_wb_cl(x, nu, nc)
>>> gx = gmp.chi2_nc_wb_cl(x, nu, nc); ax = apm.chi2_nc_wb_cl(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.2.4 Roy's largest root θ: pdf (Chiani)

`ctx.roy_chiani_pdf(`x`)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns an approximation to the pdf of the distribution of Roy's largest root θ.

See Chiani [177], Chiani [178] proposes the following algorithm:

$$F_{\Theta_1}(\theta_1) \approx P\left(k, \frac{\log(\theta_1/(1-\theta_1)) - \mu + \sigma\alpha}{\delta}\right)$$

and for its inverse, useful for evaluating the percentiles,

$$F^{-1}_{\Theta_1}(\theta_1) \approx \frac{\exp(\sigma(\delta P^{-1}(k, y) - \alpha)) + \mu}{1 + \exp(\sigma(\delta P^{-1}(k, y) - \alpha)) + \mu},$$

where

$$\mu = 2\log\tan\left(\frac{\gamma + \phi}{2}\right), \quad \sigma^3 = \frac{16}{(m+n+1)^2}\frac{1}{\sin^2(\gamma+\phi)\sin\gamma\sin\phi}$$

$$\gamma = \arccos\left(\frac{m+n-2p}{m+n-1}\right), \quad \phi = \arccos\left(\frac{m-n}{m+n-1}\right),$$

and the constants $k = 46.446$, $\delta = 0.186054$, $\alpha = 9.84801$ have been chosen to match the moments of the approximation to that of the Tracy-Widom.

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.roy_chiani_pdf(x, nu, nc); mx = mpm.roy_chiani_pdf(x, nu, nc)
>>> ix = ipm.roy_chiani_pdf(x, nu, nc); fx = fpm.roy_chiani_pdf(x, nu, nc)
>>> gx = gmp.roy_chiani_pdf(x, nu, nc); ax = apm.roy_chiani_pdf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.2.5 Roy's largest root: cdf and sf (Chiani)

`ctx.roy_chiani_cdf`(x)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns an approximation to the cdf of the distribution of Roy's largest root θ.

See Chiani [177], Chiani [178] proposes the following algorithm:

$$F_{\Theta_1}(\theta_1) \approx P\left(k, \frac{\log(\theta_1/(1-\theta_1)) - \mu + \sigma\alpha}{\delta}\right)$$

and for its inverse, useful for evaluating the percentiles,

$$F^{-1}_{\Theta_1}(\theta_1) \approx \frac{\exp(\sigma(\delta P^{-1}(k,y) - \alpha)) + \mu}{1 + \exp(\sigma(\delta P^{-1}(k,y) - \alpha)) + \mu},$$

where

$$\mu = 2\log\tan\left(\frac{\gamma+\phi}{2}\right), \quad \sigma^3 = \frac{16}{(m+n+1)^2}\frac{1}{\sin^2(\gamma+\phi)\sin\gamma\sin\phi}$$

$$\gamma = \arccos\left(\frac{m+n-2p}{m+n-1}\right), \quad \phi = \arccos\left(\frac{m-n}{m+n-1}\right),$$

and the constants $k = 46.446$, $\delta = 0.186054$, $\alpha = 9.84801$ have been chosen to match the moments of the approximation to that of the Tracy-Widom.

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.roy_chiani_cdf(x, nu, nc); mx = mpm.roy_chiani_cdf(x, nu, nc)
>>> ix = ipm.roy_chiani_cdf(x, nu, nc); fx = fpm.roy_chiani_cdf(x, nu, nc)
>>> gx = gmp.roy_chiani_cdf(x, nu, nc); ax = apm.roy_chiani_cdf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.2.6 Roy's largest root: qtf and isf (Chiani)

`ctx.roy_chiani_qtf(`x`)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns an approximation to the qtf of the distribution of Roy's largest root θ.

See Chiani [177], Chiani [178] proposes the following algorithm:

$$F_{\Theta_1}(\theta_1) \approx P\left(k, \frac{\log(\theta_1/(1-\theta_1)) - \mu + \sigma\alpha}{\delta}\right)$$

and for its inverse, useful for evaluating the percentiles,

$$F^{-1}_{\Theta_1}(\theta_1) \approx \frac{\exp(\sigma(\delta P^{-1}(k,y) - \alpha)) + \mu}{1 + \exp(\sigma(\delta P^{-1}(k,y) - \alpha)) + \mu},$$

where

$$\mu = 2\log\tan\left(\frac{\gamma+\phi}{2}\right), \quad \sigma^3 = \frac{16}{(m+n+1)^2}\frac{1}{\sin^2(\gamma+\phi)\sin\gamma\sin\phi}$$

$$\gamma = \arccos\left(\frac{m+n-2p}{m+n-1}\right), \quad \phi = \arccos\left(\frac{m-n}{m+n-1}\right),$$

and the constants $k = 46.446$, $\delta = 0.186054$, $\alpha = 9.84801$ have been chosen to match the moments of the approximation to that of the Tracy-Widom.

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.roy_chiani_qtf(x, nu, nc); mx = mpm.roy_chiani_qtf(x, nu, nc)
>>> ix = ipm.roy_chiani_qtf(x, nu, nc); fx = fpm.roy_chiani_qtf(x, nu, nc)
>>> gx = gmp.roy_chiani_qtf(x, nu, nc); ax = apm.roy_chiani_qtf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.1138774234168360557146160900744444149943E-1
mpm:  3.1138774234168360557146160900744444149943e-1
ipm:  3.1138774234168360557146160900744444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.1138774234168360557146160900744444149943E-01
ipm:  3.1138774234168360557146160900744444149943e-1 (4.055e-38%)
```

16.3 Approximations based on the central t, F or beta distribution

16.3.1 Dunn-Šidák percentage points

`ctx.dunn_sidak_qtf`(q, *nu*, C)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns the percentage points of Dunn-Šidák.

See also: Kirk, Games.

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.dunn_sidak_qtf(x, nu, nc); mx = mpm.dunn_sidak_qtf(x, nu, nc)
>>> ix = ipm.dunn_sidak_qtf(x, nu, nc); fx = fpm.dunn_sidak_qtf(x, nu, nc)
>>> gx = gmp.dunn_sidak_qtf(x, nu, nc); ax = apm.dunn_sidak_qtf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.3.2 Singly non-central Fisher F distribution: cdf, sf (Patnaik)

`ctx.fisher_f_nc_mu2_cdf`(x)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns an approximation to the cdf of the noncentral Fisher F distribution.

[Patnaik1949` suggests the following approximation, see also Tiku [780]:

$$F_{F'}(x; n_1, n_2, \lambda) \approx F_F\left(y; m_1, n_2\right), \quad \text{where}$$

$A_1 = (n_1 + \lambda)$,

$B_1 = (n_1 + 2\lambda)$,

$m_1 = A_1^2 / B_1$,

$y = n_1 / A_1$,

and $F_F\left(\cdot; m_1, n_2\right)$ denotes the CDF of a central F distribution with m_1 and n_2 degrees of freedom.

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.fisher_f_nc_mu2_cdf(x, nu, nc); mx = mpm.fisher_f_nc_mu2_cdf(x, nu, nc)
>>> ix = ipm.fisher_f_nc_mu2_cdf(x, nu, nc); fx = fpm.fisher_f_nc_mu2_cdf(x, nu, nc)
>>> gx = gmp.fisher_f_nc_mu2_cdf(x, nu, nc); ax = apm.fisher_f_nc_mu2_cdf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.3.3 Singly non-central F distribution: qtf, isf (Patnaik)

`ctx.fisher_f_nc_mu2_qtf(x)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns an approximation to $F_{\alpha,n_1,n_2,\lambda}$, the α-quantile of a non-central F-distribution with n_1 and n_2 degress of freedom and noncentrality parameter λ.

$$F_{\alpha,n_1,n_2,\lambda} \approx c \cdot F_{\alpha,m_1,n_2,}$$

$A_1 = (n_1 + \lambda)$,

$B_1 = (n_1 + 2\lambda)$,

$m_1 = A_1^2/B_1$,

$c = A_1/n_1$,

and $F_{\alpha,m_1,n_2,}$ denotes the α-quantile of a central F-distribution with m_1 and n_2 degress of freedom.

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.fisher_f_nc_mu2_qtf(x, nu, nc); mx = mpm.fisher_f_nc_mu2_qtf(x, nu, nc)
>>> ix = ipm.fisher_f_nc_mu2_qtf(x, nu, nc); fx = fpm.fisher_f_nc_mu2_qtf(x, nu, nc)
>>> gx = gmp.fisher_f_nc_mu2_qtf(x, nu, nc); ax = apm.fisher_f_nc_mu2_qtf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.3.4 Singly non-central F: confidence interval for the noncentrality parameter λ

`ctx.fisher_f_nc_mu2_cl(x)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns an approximation to the confidence interval (CI) for the noncentrality parameter λ of a singly non-central F-distribution.

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.fisher_f_nc_mu2_cl(x, nu, nc); mx = mpm.fisher_f_nc_mu2_cl(x, nu, nc)
>>> ix = ipm.fisher_f_nc_mu2_cl(x, nu, nc); fx = fpm.fisher_f_nc_mu2_cl(x, nu, nc)
>>> gx = gmp.fisher_f_nc_mu2_cl(x, nu, nc); ax = apm.fisher_f_nc_mu2_cl(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.3.5 Doubly non-central F distribution: cdf, sf (Patnaik)

`ctx.fisher_f_nc2_mu2_cdf(x)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns an approximation to the cdf of the doubly noncentral Fisher F distribution.

Mudholkar (1976) suggests an approximation by noncentral F, which can be converted into an approximation by central F as follows:

$$F_{F''}(x; n_1, n_2, \lambda_1, \lambda_2) \approx F_F(y; m_1, m_2), \quad \text{where}$$

$A_1 = (n_1 + \lambda_1), A_2 = (n_2 + \lambda_2),$

$B_1 = (n_1 + 2\lambda_1), B_2 = (n_2 + 2\lambda_2),$

$m_1 = A_1^2/B_1, m_2 = A_2^2/B_2,$

$y = x(n_1 A_2)/(n_2 A_1),$

and $F_F(\cdot; m_1, m_2)$ denotes the CDF of a central F distribution with m_1 and m_2 degrees of freedom.

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.fisher_f_nc2_mu2_cdf(x, nu, nc); mx = mpm.fisher_f_nc2_mu2_cdf(x, nu, nc)
>>> ix = ipm.fisher_f_nc2_mu2_cdf(x, nu, nc); fx = fpm.fisher_f_nc2_mu2_cdf(x, nu, nc)
>>> gx = gmp.fisher_f_nc2_mu2_cdf(x, nu, nc); ax = apm.fisher_f_nc2_mu2_cdf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.3.6 Doubly non-central F distribution: qtf, isf (Patnaik)

`ctx.fisher_f_nc2_mu2_qtf(x)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns an approximation to $F_{\alpha,n_1,n_2,\lambda_1,\lambda_2}$, the α-quantile of a doubly non-central F-distribution with n_1 and n_2 degress of freedom and noncentrality parameters λ_1 and λ_2, is obtained as

$$F_{\alpha,n_1,n_2,\lambda_1,\lambda_2} \approx c \cdot F_{\alpha,m_1,m_2,}$$

$A_1 = (n_1 + \lambda_1), A_2 = (n_1 + \lambda_2),$

$B_1 = (n_1 + 2\lambda_1), B_2 = (n_1 + 2\lambda_2),$

$m_1 = A_1^2/B_1, m_2 = A_2^2/B_2,$

$c = (n_2 A_1)/(n_1 A_2),$

and denotes the α-quantile of a central F-distribution with m_1 and m_2 degress of freedom.

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.fisher_f_nc2_mu2_qtf(x, nu, nc); mx = mpm.fisher_f_nc2_mu2_qtf(x, nu, nc)
>>> ix = ipm.fisher_f_nc2_mu2_qtf(x, nu, nc); fx = fpm.fisher_f_nc2_mu2_qtf(x, nu, nc)
>>> gx = gmp.fisher_f_nc2_mu2_qtf(x, nu, nc); ax = apm.fisher_f_nc2_mu2_qtf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.3.7 Multiple correlation coefficient: cdf, sf (Lee and Gurland)

`ctx.fisher_r2_lee_cdf(x)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns an approximation to the cdf of the Fisher R^2 distribution.

See also Lee [405], Gurland [355], Gurland and Milton [357].

$$F_{F'}(x; n_1, n_2, \rho^2) \approx F_F\left(x/c; m_1, n_2\right),$$

where $c = A_1/n_1$, $m_1 = A_1^2/A_2$, $A_1 = (n_1 + n_2)(\gamma - 1) + n_1$, $A_2 = (n_1 + n_2)(\gamma^2 - 1) + n_1$, $\gamma = 1/(1 - \rho^2)$, and $F_F\left(\cdot; m_1, n_2\right)$ denotes the CDF of a central F distribution with m_1 and n_2 degrees of freedom.

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.fisher_r2_lee_cdf(x, nu, nc); mx = mpm.fisher_r2_lee_cdf(x, nu, nc)
>>> ix = ipm.fisher_r2_lee_cdf(x, nu, nc); fx = fpm.fisher_r2_lee_cdf(x, nu, nc)
>>> gx = gmp.fisher_r2_lee_cdf(x, nu, nc); ax = apm.fisher_r2_lee_cdf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.3.8 Multiple correlation coefficient: qtf, isf (Lee and Gurland)

`ctx.fisher_r2_lee_qtf(x)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns an approximation to the qtf of the Fisher R^2 distribution.

See also Lee [405], Gurland [355], Gurland and Milton [357].

$$F_{F'}(x; n_1, n_2, \rho^2) \approx F_F\left(x/c; m_1, n_2\right),$$

where $c = A_1/n_1$, $m_1 = A_1^2/A_2$, $A_1 = (n_1 + n_2)(\gamma - 1) + n_1$, $A_2 = (n_1 + n_2)(\gamma^2 - 1) + n_1$, $\gamma = 1/(1 - \rho^2)$, and $F_F\left(\cdot; m_1, n_2\right)$ denotes the CDF of a central F distribution with m_1 and n_2 degrees of freedom.

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.fisher_r2_lee_qtf(x, nu, nc); mx = mpm.fisher_r2_lee_qtf(x, nu, nc)
>>> ix = ipm.fisher_r2_lee_qtf(x, nu, nc); fx = fpm.fisher_r2_lee_qtf(x, nu, nc)
>>> gx = gmp.fisher_r2_lee_qtf(x, nu, nc); ax = apm.fisher_r2_lee_qtf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.3.9 Fisher R^2,: confidence limit for ρ^2

ctx.**fisher_r2_lee_cl**(x)

where ctx is fpm, mpm, ipm, dec, gmp or apm.

Returns an approximation to the confidence interval (CI) for the noncentrality parameter ρ^2 of Fisher R^2 distribution.

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.fisher_r2_lee_cl(x, nu, nc); mx = mpm.fisher_r2_lee_cl(x, nu, nc)
>>> ix = ipm.fisher_r2_lee_cl(x, nu, nc); fx = fpm.fisher_r2_lee_cl(x, nu, nc)
>>> gx = gmp.fisher_r2_lee_cl(x, nu, nc); ax = apm.fisher_r2_lee_cl(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.1138774234168360557146160900744444149943E-1
mpm:  3.1138774234168360557146160900744444149943e-1
ipm:  3.1138774234168360557146160900744444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.1138774234168360557146160900744444149943E-01
ipm:  3.1138774234168360557146160900744444149943e-1 (4.055e-38%)
```

16.3.10 Central Wilks' Lambda: cdf, sf (Rao)

`ctx.wilks_lambda_rao_cdf(`x`)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns Rao's F approximation to the cdf of Wilk's Λ

Define

$$z = \frac{1-\Lambda^{1/r}}{\Lambda^{1/r}}\frac{rt-2u}{pq}, \quad \text{where } r = v - \frac{p-q+1}{2}, u = \frac{pq-2}{4}, \quad \text{and}$$

$$t = \sqrt{\frac{p^2q^2-4}{p^2+q^2-5}} \text{ if } p^2+q^2-5 > 0 \text{ or 1 otherwise.}$$

Then z is approximately distributed as $F(z; pq, rt-2u)$.

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.wilks_lambda_rao_cdf(x, nu, nc); mx = mpm.wilks_lambda_rao_cdf(x, nu, nc)
>>> ix = ipm.wilks_lambda_rao_cdf(x, nu, nc); fx = fpm.wilks_lambda_rao_cdf(x, nu, nc)
>>> gx = gmp.wilks_lambda_rao_cdf(x, nu, nc); ax = apm.wilks_lambda_rao_cdf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.1138774234168360557146160900744444149943E-1
mpm:  3.1138774234168360557146160900744444149943e-1
ipm:  3.1138774234168360557146160900744444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.1138774234168360557146160900744444149943E-01
ipm:  3.1138774234168360557146160900744444149943e-1 (4.055e-38%)
```

16.3.11 Central Wilks' Lambda: qtf, isf (Rao)

`ctx.wilks_lambda_rao_qtf(`x`)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns Rao's F approximation to the cdf of Wilk's Λ

Define

$$z = \frac{1-\Lambda^{1/r}}{\Lambda^{1/r}}\frac{rt-2u}{pq}, \quad \text{where } r = v - \frac{p-q+1}{2}, u = \frac{pq-2}{4}, \quad \text{and}$$

$$t = \sqrt{\frac{p^2q^2-4}{p^2+q^2-5}} \text{ if } p^2+q^2-5 > 0 \text{ or 1 otherwise.}$$

Then z is approximately distributed as $F(z; pq, rt-2u)$.

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.wilks_lambda_rao_qtf(x, nu, nc); mx = mpm.wilks_lambda_rao_qtf(x, nu, nc)
>>> ix = ipm.wilks_lambda_rao_qtf(x, nu, nc); fx = fpm.wilks_lambda_rao_qtf(x, nu, nc)
>>> gx = gmp.wilks_lambda_rao_qtf(x, nu, nc); ax = apm.wilks_lambda_rao_qtf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.1138774234168360557146160900744444149943E-1
mpm:  3.1138774234168360557146160900744444149943e-1
ipm:  3.1138774234168360557146160900744444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.1138774234168360557146160900744444149943E-01
ipm:  3.1138774234168360557146160900744444149943e-1 (4.055e-38%)
```

16.3.12 Central Hotelling's T^2: cdf, sf (Pillai and Young)

`ctx.hotelling_t2_mu3_cdf(x)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns an approximation to the cdf of the central Hotelling's T^2 distribution. See also Pillai and Young [469].

Let $m = (n_1 - p - 1)/2$, $n = (n_2 - p - 1)/2$, and $r = 2m + p + 1$. Define

$$\mu_1 = \frac{pr}{2n}, \quad \mu_2 = \mu_1 \frac{(2n+r)(2n+p)}{2n(n-1)(2n+1)}, \quad \mu_3 = \mu_2 \frac{2(n+r)(n+p)}{n(n-2)(n+1)},$$

$$a = \frac{(2\mu_1 3\mu_2 + 3\mu_1^2\mu_3 - 6\mu_1\mu_2^2 - \mu_2\mu_3)}{(\mu_2\mu_3 + 4\mu_1\mu_2^2 - \mu_1^2\mu_3)} + 1, \quad b = \frac{a(a+2) - \mu_1^2/\mu_2}{a - \mu_1^2/\mu_2} - a,$$

$$K = \frac{\mu_1(b-1)}{a}, \quad w = \frac{x}{x+K}.$$

Then $x = T^2/n_2$ is approximately distributed as $I_w(a, b)$.

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.hotelling_t2_mu3_cdf(x, nu, nc); mx = mpm.hotelling_t2_mu3_cdf(x, nu, nc)
>>> ix = ipm.hotelling_t2_mu3_cdf(x, nu, nc); fx = fpm.hotelling_t2_mu3_cdf(x, nu, nc)
>>> gx = gmp.hotelling_t2_mu3_cdf(x, nu, nc); ax = apm.hotelling_t2_mu3_cdf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.3.13 Central Hotelling's T^2: qtf, isf (Pillai and Young)

`ctx.hotelling_t2_mu3_qtf(x)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns an approximation to the qtf of the central Hotelling's T^2 distribution, based on matching the first 3 moments.. See also Pillai and Young [469].

Let $m = (n_1 - p - 1)/2$, $n = (n_2 - p - 1)/2$, and $r = 2m + p + 1$. Define

$$\mu_1 = \frac{pr}{2n}, \quad \mu_2 = \mu_1 \frac{(2n+r)(2n+p)}{2n(n-1)(2n+1)}, \quad \mu_3 = \mu_2 \frac{2(n+r)(n+p)}{n(n-2)(n+1)},$$

$$a = \frac{(2\mu_1 3\mu_2 + 3\mu_1^2\mu_3 - 6\mu_1\mu_2^2 - \mu_2\mu_3)}{(\mu_2\mu_3 + 4\mu_1\mu_2^2 - \mu_1^2\mu_3)} + 1, \quad b = \frac{a(a+2) - \mu_1^2/\mu_2}{a - \mu_1^2/\mu_2} - a,$$

$$K = \frac{\mu_1(b-1)}{a}, \quad w = \frac{x}{x+K}.$$

Then $x = T^2/n_2$ is approximately distributed as $I_w(a, b)$.

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.hotelling_t2_mu3_qtf(x, nu, nc); mx = mpm.hotelling_t2_mu3_qtf(x, nu, nc)
>>> ix = ipm.hotelling_t2_mu3_qtf(x, nu, nc); fx = fpm.hotelling_t2_mu3_qtf(x, nu, nc)
```

(continues on next page)

(continued from previous page)

```
>>> gx = gmp.hotelling_t2_mu3_qtf(x, nu, nc); ax = apm.hotelling_t2_mu3_qtf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.11387742341683605571461609007444414994 3E-1
mpm:  3.11387742341683605571461609007444414994 3e-1
ipm:  3.11387742341683605571461609007444414994 4e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.11387742341683605571461609007444414994 3E-01
ipm:  3.11387742341683605571461609007444414994 3e-1 (4.055e-38%)
```

16.3.14 Central Pillai's V: cdf, sf (Ginzberg)

`ctx.pillay_v_mu3_cdf(`x`)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns an approximation to the cdf of the central Pillai V distribution, based on matching the first 3 moments. See also Ginzberg [347].

Let $m = (n_1 - p - 1)/2$, $n = (n_2 - p - 1)/2$, and $r = m + n + p$. Define

$$\mu_1 = \frac{p(2m+p+1)}{2(r+1)}, \quad \mu_2 = \mu_1 \frac{(2n+p+1)(2r-p+2)}{2(r+1)(r+2)(2r+1)}, \quad \mu_3 = \mu_2 \frac{4(n-m)(m+n+1)}{(r+1)(r+3)(2r)},$$

$$c = 4\mu_1\mu_2^2 - \mu_1^2\mu_3 + \mu_2\mu_3, \quad d = 2\mu_2^2 - \mu_1\mu_3,$$

$$a = \frac{2\mu_1(\mu_1^2\mu_2 - \mu_2^2 + \mu_1\mu_3)}{c}, \quad b = \frac{a}{d}\,\frac{\mu_2(2\mu_1\mu_2 + \mu_3)}{\mu_1}, \quad w = \frac{d}{c}x.$$

Then $x = V/n_2$ is approximately distributed as $I_w(a, b)$.

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.pillay_v_mu3_cdf(x, nu, nc); mx = mpm.pillay_v_mu3_cdf(x, nu, nc)
>>> ix = ipm.pillay_v_mu3_cdf(x, nu, nc); fx = fpm.pillay_v_mu3_cdf(x, nu, nc)
>>> gx = gmp.pillay_v_mu3_cdf(x, nu, nc); ax = apm.pillay_v_mu3_cdf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.11387742341683605571461609007444414994 3E-1
mpm:  3.11387742341683605571461609007444414994 3e-1
ipm:  3.11387742341683605571461609007444414994 4e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.11387742341683605571461609007444414994 3E-01
ipm:  3.11387742341683605571461609007444414994 3e-1 (4.055e-38%)
```

16.3.15 Central Pillai's V: qtf, isf (Ginzberg)

`ctx.pillay_v_mu3_qtf(`x`)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns an approximation to the cdf of the central Pillai V distribution. See also Ginzberg [347].

Let $m = (n_1 - p - 1)/2$, $n = (n_2 - p - 1)/2$, and $r = m + n + p$. Define

$$\mu_1 = \frac{p(2m+p+1)}{2(r+1)}, \quad \mu_2 = \mu_1 \frac{(2n+p+1)(2r-p+2)}{2(r+1)(r+2)(2r+1)}, \quad \mu_3 = \mu_2 \frac{4(n-m)(m+n+1)}{(r+1)(r+3)(2r)},$$

$$c = 4\mu_1\mu_2^2 - \mu_1^2\mu_3 + \mu_2\mu_3, \quad d = 2\mu_2^2 - \mu_1\mu_3,$$

$$a = \frac{2\mu_1(\mu_1^2\mu_2 - \mu_2^2 + \mu_1\mu_3)}{c}, \quad b = \frac{a}{d}\,\frac{\mu_2(2\mu_1\mu_2 + \mu_3)}{\mu_1}, \quad w = \frac{d}{c}x.$$

Then $x = V/n_2$ is approximately distributed as $I_w(a, b)$.

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.pillay_v_mu3_qtf(x, nu, nc); mx = mpm.pillay_v_mu3_qtf(x, nu, nc)
>>> ix = ipm.pillay_v_mu3_qtf(x, nu, nc); fx = fpm.pillay_v_mu3_qtf(x, nu, nc)
>>> gx = gmp.pillay_v_mu3_qtf(x, nu, nc); ax = apm.pillay_v_mu3_qtf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.3.16 Product of independent beta variables: cdf, sf (Nagarsenker)

`ctx.beta_product_mu3_cdf`(x)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns an approximation to the cdf of the product of independent beta variables distribution.

Nagarsenker and Suniaga [419] proposes the following approximation:

$$\Pr(W_p \le \lambda) = I(x; sm + d, \nu_1 + r) + O(sm^{-3}), \quad \text{where}$$

$$x = \lambda^{1/s}; \quad a = \frac{\nu_1 - \nu_2}{2\nu_1}; \quad d = \frac{1 - \nu_1}{2}; \quad \nu_r = \sum_{i=1}^{p} c_i^r - b_i^r$$

$$s^2 = \frac{-2B_2((1 + \nu_1)/2)}{\sum_{i=1}^{p} B_3(a + b_i) - B_3(a + c_i)}$$

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.beta_product_mu3_cdf(x, nu, nc); mx = mpm.beta_product_mu3_cdf(x, nu, nc)
>>> ix = ipm.beta_product_mu3_cdf(x, nu, nc); fx = fpm.beta_product_mu3_cdf(x, nu, nc)
>>> gx = gmp.beta_product_mu3_cdf(x, nu, nc); ax = apm.beta_product_mu3_cdf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.3.17 Product of independent beta variables: qtf, isf (Nagarsenker)

`ctx.beta_product_mu3_qtf`(x)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns an approximation to the qtf of the product of independent beta variables distribution.

Nagarsenker and Suniaga [419] proposes the following approximation:

$$\Pr(W_p \le \lambda) = I(x; sm + d, \nu_1 + r) + O(sm^{-3}), \quad \text{where}$$

$$x = \lambda^{1/s}; \quad a = \frac{\nu_1 - \nu_2}{2\nu_1}; \quad d = \frac{1 - \nu_1}{2}; \quad \nu_r = \sum_{i=1}^{p} c_i^r - b_i^r$$

$$s^2 = \frac{-2B_2((1+\nu_1)/2)}{\sum_{i=1}^{p} B_3(a+b_i) - B_3(a+c_i)}$$

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.beta_product_mu3_qtf(x, nu, nc); mx = mpm.beta_product_mu3_qtf(x, nu, nc)
>>> ix = ipm.beta_product_mu3_qtf(x, nu, nc); fx = fpm.beta_product_mu3_qtf(x, nu, nc)
>>> gx = gmp.beta_product_mu3_qtf(x, nu, nc); ax = apm.beta_product_mu3_qtf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.4 Approximations based on the noncentral chi-squared distribution

16.4.1 Non-central Wilks' Lambda (GLM): cdf and sf (Fujikoshi)

`ctx.`**`wilks_lambda_glm_chi2_cdf`**(*x*, *p*, *q*, *n*, *lambda*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns an approximation to the cdf of the noncentral Wilks' Lambda (GLM) distribution.

Fujikoshi [337] proposes the following noncentral chi-square approximation to the cdf and sf:

$$\begin{aligned} F_{\Lambda,GLM}(p,q,n;z;\Theta) &= F_{\chi^2}\left(pq,x;\theta_1\right) + \frac{1}{4n}\sum_{k=1}^{3} a_k F_{\chi^2}\left(pq+2k,x;\theta_1\right) \\ &+ \frac{1}{96n^2}\sum_{k=0}^{6} b_k F_{\chi^2}\left(pq+2k,x;\theta_1\right) + \frac{1}{96n^3}\sum_{k=1}^{9} c_k F_{\chi^2}\left(pq+2k,x;\theta_1\right) + O(n^{-4}) \end{aligned} \tag{16.12}$$

$$\Theta = \Lambda^{-1}MM', \quad \theta_j = \text{tr}\,\Theta^j,$$

$$m = n + (pq-1)/2, \quad x = m\log(z), \quad s = (p+q+1)/4, \quad r = pq(p^2+q^2-5)/48,$$

$$\begin{aligned} a_1 &= 2s\theta_1 \\ a_2 &= 2s\theta_1 - \theta_2 \\ a_3 &= \theta_2 \end{aligned} \tag{16.13}$$

$$\begin{aligned} b_0 &= r \\ b_1 &= 0 \\ b_2 &= r4s^2\theta_1 + 2s^2\theta_1^2 + 2s\theta_2 \\ b_3 &= 4s^2\theta_1 - (1+4s^2)\theta_1^2 - (1+8s)\theta_2 + 2s\theta_1\theta_2 + (4/3)\theta_3 \\ b_4 &= (1+2s^2)\theta_1^2 + (1+6s)\theta_2 - 4s\theta_1\theta_2 - 4\theta_3 + \theta_2^2/2 \\ b_5 &= 2s\theta_1\theta_2 + (8/3)\theta_3 - \theta_2^2 \\ b_6 &= \theta_2^2/2 \end{aligned} \tag{16.14}$$

$$\begin{aligned} c_1 &= 2rs\theta_1 \\ c_2 &= r(2s\theta_1\theta_2) \\ c_3 &= 2s(r+4s^2)\theta_1 + 2s(1+4s^2)\theta_1^2 + (-r+2s+12s^2)\theta_2 - \tfrac{4}{3}s^3\theta_1^3 - 4s^2\theta_1\theta_2 - \tfrac{8}{3}s\theta_3 \\ c_4 &= 2s(r+4s^2)\theta_1 - (1+10s+16s^3)\theta_1^2 - (3+r+10s+36s^2)\theta_2 + 2s(1+2s^2)\theta_1^3 \\ &+ 2(2+s+12s^2)\theta_1\theta_2 + 4(1+6s)\theta_3 - 2s^2\theta_1^2\theta_2 - 2s\theta_2^2 - \tfrac{8}{3}s\theta_1\theta_3 - 2\theta_4 \\ c_5 &= (1+8s+8s^3)\theta_1^2 + (3+r+8s+24s^2)\theta_2 - 4s(1+s^2)\theta_1^3 - 4(3+s+9s^2)\theta_1\theta_2 - 12(1+4s)\theta_3 \\ &+ (1+6s^2)\theta_1^2\theta_2 + (1+10s)\theta_2^2 + \tfrac{32}{3}s\theta_1\theta_3 + 12\theta_4 - \tfrac{4}{3}\theta_2\theta_3 - s\theta_1\theta_2^2 \\ c_6 &= s(2+\tfrac{4}{3}s^2)\theta_1^3 + 2(4+s+8s^2)\theta_1\theta_2 + 8(1+\tfrac{10}{3}s)\theta_3 - 2(1+3s^2)\theta_1^2\theta_2 - 2(1+7s)\theta_2^2 \\ &- \tfrac{40}{3}s\theta_1\theta_3 - 20\theta_4 + \tfrac{16}{3}\theta_2\theta_3 + 3s\theta_1\theta_2^2 - \tfrac{1}{6}\theta_2^3 \\ c_7 &= (1+2s^2)\theta_1^2\theta_2 + (1+6s)\theta_2^2 + \tfrac{16}{3}s\theta_1\theta_3 + 10\theta_4 - \tfrac{20}{3}\theta_2\theta_3 - 3s\theta_1\theta_2^2 + \tfrac{1}{2}\theta_2^3 \\ c_8 &= \tfrac{8}{3}\theta_2\theta_3 + s\theta_1\theta_2^2 - \tfrac{1}{2}\theta_2^3 \\ c_9 &= \tfrac{1}{6}\theta_2^3 \end{aligned} \tag{16.15}$$

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.wilks_lambda_glm_chi2_cdf(x, nu, nc); mx = mpm.wilks_lambda_glm_chi2_cdf(x, nu, nc)
>>> ix = ipm.wilks_lambda_glm_chi2_cdf(x, nu, nc); fx = fpm.wilks_lambda_glm_chi2_cdf(x, nu, nc)
>>> gx = gmp.wilks_lambda_glm_chi2_cdf(x, nu, nc); ax = apm.wilks_lambda_glm_chi2_cdf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.1138774234168360557146160900744441499 43E-1
mpm:  3.1138774234168360557146160900744441499 43e-1
ipm:  3.1138774234168360557146160900744441499 44e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.1138774234168360557146160900744441499 43E-01
ipm:  3.1138774234168360557146160900744441499 43e-1 (4.055e-38%)
```

Fujikoshi [337]

Pillai: coeff p. 93 (5.10), GLM p. 96 (5.2), CORR p. 113/114 (8.1)

Hotelling: coeff p. 105 (6.18), GLM p. 105 (6.19), CORR p. 119 (9.9)

16.4.2 Non-central Wilks' Lambda (independence): cdf and sf (Lee)

`ctx.wilks_lambda_ind_chi2_cdf`(*x*, *p*, *q*, *n*, *lambda*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns an approximation to the cdf of the noncentral Wilks' Lambda (independence) distribution.

Lee [404] proposes the following noncentral chi-square approximation:

$$\text{cdf}_X(x) == F_{\chi^2}\left(pq, x; s1\right) + \frac{1}{4n}\sum_{k=0}^{3} a_k F_{\chi^2}\left(pq+2k, x; s1\right) + \frac{1}{96n^2}\sum_{k=0}^{6} b_k F_{\chi^2}\left(pq+2k, x; s1\right) + O(n^{-3}),$$

$\Omega = \Lambda^{-1}MM'$, $\theta_j = \text{tr}\,\Omega^j$, $m = n + (pq-1)/2$, $x = m\log(z)$, $f = pq$, $s = (p+q+1)/4$, $r = f(p^2+q^2-5)/48$,

$a_0 = -q\theta_1 + \theta_2$, $a_1 = (2s+q)\theta_1 - 2\theta_2$, $a_2 = -2s\theta_1 + 2\theta_2$, $a_3 = -\theta_2$,

$b_0 = -r - ql\theta_1 + (q+l)\theta_2 + \frac{1}{2}q^2\theta_1^2 - \frac{4}{3}\theta_3 - q\theta_1\theta_2 + \frac{1}{2}\theta_2^2$,

$b_1 = q^2\theta_1 - 4q\theta_2 - q(q+2s)\theta_1^2 + 4\theta_3 + (3q+2s)\theta_1\theta_2 - 2\theta_2^2$,

$b_2 = r - 2s(q+2s)\theta_1 + (2p+6q+3)\theta_2 + (\frac{1}{2}l^2 + 6qs + 1)\theta_1^2 - 8\theta_3 - (4q+6s)\theta_1\theta_2 + 4\theta_2^2$,

$b_3 = 4s^2\theta_1 - (3p+5q+5)\theta_2 - (4s^2+2qs+2)\theta_1^2 + \frac{32}{3}\theta_3 + (3q+8s)\theta_1\theta_2 - 5\theta_2^2$,

$b_4 = (6s+1)\theta_2 + (2s^2+1)\theta_1^2 - 8\theta_3 - (q+6s)\theta_1\theta_2 + 4\theta_2^2$,

$b_5 = \frac{8}{3}\theta_3 + 2s\theta_1\theta_2 - 2\theta_2^2$,

$b_6 = \frac{1}{2}\theta_2^2$.

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.wilks_lambda_ind_chi2_cdf(x, nu, nc); mx = mpm.wilks_lambda_ind_chi2_cdf(x, nu, nc)
>>> ix = ipm.wilks_lambda_ind_chi2_cdf(x, nu, nc); fx = fpm.wilks_lambda_ind_chi2_cdf(x, nu, nc)
>>> gx = gmp.wilks_lambda_ind_chi2_cdf(x, nu, nc); ax = apm.wilks_lambda_ind_chi2_cdf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.4.3 Non-central Pillai's V (GLM): cdf and sf Fujikoshi

`ctx.pillai_v_glm_chi2_cdf`(*x*, *p*, *q*, *n*, *lambda*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns an approximation to the cdf of the noncentral Pillai's V (GLM) distribution.

Fujikoshi [338] proposes the following noncentral chi-square approximation to the cdf and sf:

$$\text{cdf}_X(x) == F_{\chi^2}\left(pq, x; s1\right) + \frac{1}{4n}\sum_{k=0}^{3} a_k F_{\chi^2}\left(pq+2k, x; s1\right) + \frac{1}{96n^2}\sum_{k=0}^{6} b_k F_{\chi^2}\left(pq+2k, x; s1\right) + O(n^{-3}),$$

$l_0 = (3f-8)g^2 + 4g + 4(f+2)$

$l_1 = -12fg^2$

$l_2 = 6(3f+8)g^2$

$l_3 = -4((3f+16)g^2 + 4g + 4(f+2))$

$l_4 = 3((f+8)g^2 + 4g + 4(f+2))$

$a_0 = -fg$

$a_1 = 2fg$

$a_2 = -fg + 4g\lambda_1 + 4\lambda_2$

$a_3 = -4g\lambda_1$

$a_4 = -4\lambda_2$

$b_0 = fl_0$

$b_1 = fl_1$

$b_2 = fl_2 + 2l_1\lambda_1 - 24fg\lambda_2$

$b_3 = fl_3 + 4l_2\lambda_1 + 48(f+4)g\lambda_2 + 128\lambda_3$

$b_4 = fl_4 + 6l_3\lambda_1 + 48(g^2-2)\lambda_1^2 - 96(g+1)\lambda_2 + 96g\lambda_1\lambda_2 + 48\lambda_2^2$

$b_5 = 8(l_4\lambda_1 - 12(g^2+2)\lambda_1^2 - 6((f+12)g+4)\lambda_2 - 12g\lambda_1\lambda_2 - 48\lambda_3)$

$b_6 = 8(6(g^2+6)\lambda_1^2 + 3((f+20)g+12)\lambda_2 - 12g\lambda_1\lambda_2 - 16\lambda_3 - 12\lambda_2^2)$

$b_7 = 96(g\lambda_1\lambda_2 + 4\lambda_3)$

$b_8 = 48\lambda_2^2$

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.pillai_v_glm_chi2_cdf(x, nu, nc); mx = mpm.pillai_v_glm_chi2_cdf(x, nu, nc)
>>> ix = ipm.pillai_v_glm_chi2_cdf(x, nu, nc); fx = fpm.pillai_v_glm_chi2_cdf(x, nu, nc)
>>> gx = gmp.pillai_v_glm_chi2_cdf(x, nu, nc); ax = apm.pillai_v_glm_chi2_cdf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.4.4 Non-central Pillai's V (independence): cdf and sf (Lee)

`ctx.pillai_v_ind_chi2_cdf`(*x*, *p*, *q*, *n*, *lambda*)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns an approximation to the cdf of the noncentral Pillai's V (independence) distribution.

Lee [404] proposes the following noncentral chi-square approximation. See also

$$\mathrm{cdf}_X(x) == F_{\chi^2}\left(pq, x; s1\right) + \frac{1}{4n}\sum_{k=0}^{3} a_k F_{\chi^2}\left(pq+2k, x; s1\right) + \frac{1}{96n^2}\sum_{k=0}^{6} b_k F_{\chi^2}\left(pq+2k, x; s1\right) + O(n^{-3}),$$

$a_0 = -fg - 4\lambda_2$

$a_1 = 2fg$

$a_2 = -fg + 4g\lambda_1 + 8\lambda_2$

$a_3 = -4g\lambda_1$

$a_4 = -4\lambda_2$

$b_0 = fl_0 + 24fg\lambda_2 - 128\lambda_3 + 48\lambda_2^2$

$b_1 = fl_1 - 48fg\lambda_2$

$b_2 = fl_2 + 2l_1\lambda_1 + 96\lambda_1^2 - 24(qp^2 + q(q+1)p - 4)\lambda_2 - 96g\lambda_1\lambda_2 - 192\lambda_2^2$

$b_3 = fl_3 + 4l_2\lambda_1 + 96(qp^2 + (q^2+q+4)p + 4(q+1))\lambda_2 + 96g\lambda_1\lambda_2 + 640\lambda_3$

$b_4 = fl_4 + 6l_3\lambda_1 + 48(p^2 + 2(q+1)p + q^2 + 2q - 3)\lambda_1^2 - 24(qp^2 + (q^2+q+12)p + 4(3q+5))\lambda_2 + 192g\lambda_1\lambda_2 + 288\lambda_2^2$

$b_5 = 8l_4\lambda_1 - 96(p^2 + 2(q+1)p + q^2 + 2q + 3)\lambda_1^2 - 48(qp^2 + (q^2+q+12)p + 4(3q+4))\lambda_2 - 192g\lambda_1\lambda_2 - 768\lambda_3$

$b_6 = 48(p^2 + 2(q+1)p + q^2 + 2q + 7)\lambda_1^2 + 24(qp^2 + (q^2+q+20)p + 4(5q+8))\lambda_2 - 96g\lambda_1\lambda_2 - 128\lambda_3 - 192\lambda_2^2$

$b_7 = 96(g\lambda_1\lambda_2 + 4\lambda_3)$

$b_8 = 48\lambda_2^2$

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.pillai_v_ind_chi2_cdf(x, nu, nc); mx = mpm.pillai_v_ind_chi2_cdf(x, nu, nc)
>>> ix = ipm.pillai_v_ind_chi2_cdf(x, nu, nc); fx = fpm.pillai_v_ind_chi2_cdf(x, nu, nc)
>>> gx = gmp.pillai_v_ind_chi2_cdf(x, nu, nc); ax = apm.pillai_v_ind_chi2_cdf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.4.5 Non-central Hotelling T^2 (GLM): cdf and sf (Fujikoshi)

`ctx.hotelling_t2_glm_chi2_cdf(x)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns an approximation to the cdf of the noncentral Hotelling T^2 (GLM) distribution.

Fujikoshi [338] proposes the following noncentral chi-square approximation to the pdf and cdf:

$$\mathrm{cdf}_X(x) == F_{\chi^2}\left(pq, x; s1\right) + \frac{1}{4n}\sum_{k=0}^{3} a_k F_{\chi^2}\left(pq+2k, x; s1\right) + \frac{1}{96n^2}\sum_{k=0}^{6} b_k F_{\chi^2}\left(pq+2k, x; s1\right) + O(n^{-3}),$$

$a_0 = fg$

$a_1 = -2g(f - 2\lambda_1)$

$a_2 = fg - 8g\lambda_1 + 4\lambda_2$

$a_3 = 4(g\lambda_1 - 2\lambda_2)$

$a_4 = 4\lambda_2$

$b_0 = fl_0$

$b_1 = l_1(f - 2\lambda_1)$

$b_2 = fl_2 + 2(l_1 - 2l_2)\lambda_1 + 48g^2\lambda_1^2 + 24(f+4)g\lambda_2$

$b_3 = fl_3 + 2(2l_2 - 3l_3)\lambda_1 - 192(g^2+1)\lambda_1^2 - 96((f+8)g + 2)\lambda_2 + 96g\lambda_1\lambda_2 + 128\lambda_3$

$b_4 = fl_4 + 2(3l_3 - 4l_4)\lambda_1 + 96(3g^2+7)\lambda_1^2 + 48(3(f+12)g + 14)\lambda_2 - 384g\lambda_1\lambda_2 - 768\lambda_3 + 48\lambda_2^2$

$b_5 = 8l_4\lambda_1 - 192(g^2+4)\lambda_1^2 - 96((f+16)g + 8)\lambda_2 + 576g\lambda_1\lambda_2 + 1536\lambda_3 - 192\lambda_2^2$

$b_6 = 48(g^2+6)\lambda_1^2 + 24((f+20)g + 12)\lambda_2 - 384g\lambda_1\lambda_2 - 1280\lambda_3 + 288\lambda_2^2$

$b_7 = 96g\lambda_1\lambda_2 + 384\lambda_3 - 192\lambda_2^2$

$b_8 = 48\lambda_2^2$

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.hotelling_t2_glm_chi2_cdf(x, nu, nc); mx = mpm.hotelling_t2_glm_chi2_cdf(x, nu, nc)
>>> ix = ipm.hotelling_t2_glm_chi2_cdf(x, nu, nc); fx = fpm.hotelling_t2_glm_chi2_cdf(x, nu, nc)
>>> gx = gmp.hotelling_t2_glm_chi2_cdf(x, nu, nc); ax = apm.hotelling_t2_glm_chi2_cdf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.4.6 Non-central Hotelling T^2 (independence): cdf and sf (Lee)

`ctx.hotelling_t2_ind_chi2_cdf(x)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Returns an approximation to the cdf of the noncentral Hotelling T^2 (independence) distribution.

Lee [404] proposes the following noncentral chi-square approximation:

$$\text{cdf}_X(x) == F_{\chi^2}\left(pq, x; s1\right) + \frac{1}{4n}\sum_{k=0}^{3} a_k F_{\chi^2}\left(pq+2k, x; s1\right) + \frac{1}{96n^2}\sum_{k=0}^{6} b_k F_{\chi^2}\left(pq+2k, x; s1\right) + O(n^{-3}),$$

$s_1 = 2\lambda_1$

$s_2 = 4\lambda_2$

$s_3 = 8\lambda_3$

$a_0 = qp(q-p-1) - 2qs_1 + s_2$

$a_1 = -2q^2p + 4qs_1 - 2s_2$

$a_2 = qp(q+p+1) - 2(2q+p+1)s_1 + 2s_2$

$a_3 = 2(q+p+1)s_1 - 2s_2$

$a_4 = s_2$

$b_0 = qp(3qp^3 - 2(3q^2 - 3q + 4)p^2 + 3(q^3 - 2q^2 + 5q - 4)p - 8q^2 + 12q + 4) - 12q^2p(q-p-1)s_1 - 6q(p^2 - qp + p - 4)s_2 + 12q^2s_1^2 - 16s_3 - 12qs_1s_2 + 3s_22$

$b_1 = -12q^3p^2(q-p-1) - 24q^2(p^2 - 2qp + p - 2)s_1 + 12q(p^2 - 2qp + p - 8)s_2 - 48q^2s_1^2 + 48s_3 + 48qs_1s_2 - 12s_22$

$b_2 = -6q^2p^4 - 12q^2p^3 + 18q^2(q^2+1)p^2 + 24q^2(2q+1)p + 12q(p^3 + 2p^2 - 7(q^2+1)p - 16q - 8)s_1 - 6(qp^2 - (7q^2 - q + 8)p - 40q - 12)s_2 + 24(qp + 4q^2 + q + 1)s_1^2 - 12(p + 8q + 1)s_1s_2 - 96s_3 + 24s_22$

$b_3 = -(12q^3+16q)p^3 - (12q^4+12q^3+96q^2+48q)p^2 - (64q^3+96q^2+64q)p + 12(-qp^3 + (4q^2-2q+4)p^2 + (7q^3+4q^2+31q+12)p + 4(7q^2+8q+4))s_1 - 48((q^2+3)p+9q+5)s_2 - 24(3qp+5q^2+3q+4)s_1^2 + 176s_3 + 12(3p+11q+3)s_1s_2 - 36s_22$

$b_4 = 3q^2p^4 + (6q^3+6q^2+24q)p^3 + (3q^4+6q^3+63q^2+60q)p^2 + (24q^3+60q^2+60q)p - 12(qp^3 + (5q^2+2q+12)p^2 + (4q^3+5q^2+45q+32)p + 4(6q^2+11q+9))s_1 + 6(qp^2 + (7q^2+q+44)p + 88q + 76)s_2 + 12(p^2 + 2(4q+1)p + 8q^2 + 8q + 17)s_1^2 - 12(4p + 11q + 4)s_1s_2 - 240s_3 + 42s_22$

$b_5 = (12qp^3 + 24(q^2+q+4)p^2 + 12(q^3+2q^2+21q+20)p + 48(2q^2+5q+5))s_1 - 12(qp^2 + (2q^2+q+24)p + 32q + 40)s_2 - 24(p^2 + (3q+2)p + 2q^2 + 3q + 9)s_1^2 + 240s_3 + 48(p+2q+1)s_1s_2 - 36s_22$

$b_6 = (6qp^2+6(q^2+q+20)p+120q+192)s_2 + (12p^2+24(q+1)p+12(q^2+2q+7))s_1^2 - 12(3p+4q+3)s_1s_2 - 160s_3 + 24s_22$

$b_7 = 48s_3 + 12(q+p+1)s_1s_2 - 12s_22$

$b_8 = 3s_22$

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.hotelling_t2_ind_chi2_cdf(x, nu, nc); mx = mpm.hotelling_t2_ind_chi2_cdf(x, nu, nc)
>>> ix = ipm.hotelling_t2_ind_chi2_cdf(x, nu, nc); fx = fpm.hotelling_t2_ind_chi2_cdf(x, nu, nc)
>>> gx = gmp.hotelling_t2_ind_chi2_cdf(x, nu, nc); ax = apm.hotelling_t2_ind_chi2_cdf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.5 Approximations based on the noncentral F or beta distribution

16.5.1 Multiple correlation coefficient (Lee and Gurland)

`ctx.fisher_r2_lee_mu3_cdf(`x`)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

Lee [405] suggests the following approximation, based on the noncentral F distribution:

$$F_{R^2}(x; n_1, n_2, \rho^2) \approx F_{F'}(y; \nu, n_2, \lambda),$$

where $\gamma = 1/(1-\rho^2), \quad A_j = (n_1+n_2)(\gamma^j - 1) + n_1, \quad j = 1, 2, 3,$

$G = (A_2 - \sqrt{A_2^2 - A_1 A_3})/A_1, \quad \lambda = \rho^2\gamma\sqrt{\gamma(n_1+n_2)n_2}/G^2, \quad \nu = (A_2/G^2) - 2\lambda, \quad y = x/(1-x) \times n_2/(\nu \cdot G),$

and $F_{F'}(\cdot; \nu, n_2, \lambda)$ denotes the CDF of the noncentral F distribution with ν and n_2 degrees of freedom and noncentrality parameter λ

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.hotelling_t2_ind_chi2_cdf(x, nu, nc); mx = mpm.hotelling_t2_ind_chi2_cdf(x, nu, nc)
>>> ix = ipm.hotelling_t2_ind_chi2_cdf(x, nu, nc); fx = fpm.hotelling_t2_ind_chi2_cdf(x, nu, nc)
>>> gx = gmp.hotelling_t2_ind_chi2_cdf(x, nu, nc); ax = apm.hotelling_t2_ind_chi2_cdf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.1138774234168360557146160900744444149943E-1
mpm:  3.1138774234168360557146160900744444149943e-1
ipm:  3.1138774234168360557146160900744444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.1138774234168360557146160900744444149943E-01
ipm:  3.1138774234168360557146160900744444149943e-1 (4.055e-38%)
```

16.5.2 Noncentral Wilks' Lambda under the GLM alternative

`ctx.wilks_lambda_glm_mu2_cdf(`x`)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

See also: O'Brien and Shieh [423], Kulp and Nagarsenker [399]

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.wilks_lambda_glm_mu2_cdf(x, nu, nc); mx = mpm.wilks_lambda_glm_mu2_cdf(x, nu, nc)
>>> ix = ipm.wilks_lambda_glm_mu2_cdf(x, nu, nc); fx = fpm.wilks_lambda_glm_mu2_cdf(x, nu, nc)
>>> gx = gmp.wilks_lambda_glm_mu2_cdf(x, nu, nc); ax = apm.wilks_lambda_glm_mu2_cdf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.1138774234168360557146160900744444149943E-1
mpm:  3.1138774234168360557146160900744444149943e-1
ipm:  3.1138774234168360557146160900744444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.1138774234168360557146160900744444149943E-01
ipm:  3.1138774234168360557146160900744444149943e-1 (4.055e-38%)
```

16.5.3 Noncentral Wilks' Lambda under the independence alternative

`ctx.wilks_lambda_ind_mu2_cdf(`x`)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

See also: O'Brien and Shieh [423], Kulp and Nagarsenker [399]

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.wilks_lambda_ind_mu2_cdf(x, nu, nc); mx = mpm.wilks_lambda_ind_mu2_cdf(x, nu, nc)
>>> ix = ipm.wilks_lambda_ind_mu2_cdf(x, nu, nc); fx = fpm.wilks_lambda_ind_mu2_cdf(x, nu, nc)
>>> gx = gmp.wilks_lambda_ind_mu2_cdf(x, nu, nc); ax = apm.wilks_lambda_ind_mu2_cdf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.5.4 Noncentral Hotelling's T under the GLM alternative

`ctx.`**`hotelling_t2_glm_mu2_cdf`**(x)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

See also: O'Brien and Shieh [423]

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.hotelling_t2_glm_mu2_cdf(x, nu, nc); mx = mpm.hotelling_t2_glm_mu2_cdf(x, nu, nc)
>>> ix = ipm.hotelling_t2_glm_mu2_cdf(x, nu, nc); fx = fpm.hotelling_t2_glm_mu2_cdf(x, nu, nc)
>>> gx = gmp.hotelling_t2_glm_mu2_cdf(x, nu, nc); ax = apm.hotelling_t2_glm_mu2_cdf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.5.5 Noncentral Hotelling's T under the independence alternative

`ctx.`**`hotelling_t2_ind_mu2_cdf`**(x)

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

See also: O'Brien and Shieh [423]

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.hotelling_t2_ind_mu2_cdf(x, nu, nc); mx = mpm.hotelling_t2_ind_mu2_cdf(x, nu, nc)
>>> ix = ipm.hotelling_t2_ind_mu2_cdf(x, nu, nc); fx = fpm.hotelling_t2_ind_mu2_cdf(x, nu, nc)
>>> gx = gmp.hotelling_t2_ind_mu2_cdf(x, nu, nc); ax = apm.hotelling_t2_ind_mu2_cdf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.5.6 Noncentral Pillai's V under the GLM alternative

`ctx.pillai_v_glm_mu2_cdf(`x`)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

See also: O'Brien and Shieh [423]

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.pillai_v_glm_mu2_cdf(x, nu, nc); mx = mpm.pillai_v_glm_mu2_cdf(x, nu, nc)
>>> ix = ipm.pillai_v_glm_mu2_cdf(x, nu, nc); fx = fpm.pillai_v_glm_mu2_cdf(x, nu, nc)
>>> gx = gmp.pillai_v_glm_mu2_cdf(x, nu, nc); ax = apm.pillai_v_glm_mu2_cdf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.5.7 Noncentral Pillai's V under the independence alternative

`ctx.pillai_v_ind_mu2_cdf(`x`)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

See also: O'Brien and Shieh [423]

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.pillai_v_ind_mu2_cdf(x, nu, nc); mx = mpm.pillai_v_ind_mu2_cdf(x, nu, nc)
>>> ix = ipm.pillai_v_ind_mu2_cdf(x, nu, nc); fx = fpm.pillai_v_ind_mu2_cdf(x, nu, nc)
>>> gx = gmp.pillai_v_ind_mu2_cdf(x, nu, nc); ax = apm.pillai_v_ind_mu2_cdf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.5.8 Noncentral Roy's largest root under the GLM alternative

`ctx.roy_glm_mu2_cdf(`x`)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

See Muirhead and Chikuse [417].

Let $l_1 \geq l_2 \geq \cdots \geq l_m > 0$ be the latent roots of $S_1 S_2^{-1}$.$Let`\Omega = \Sigma^{-1} M' M$, and ω_i are the latent roots of Ω. An upper bound for the distribution function of l_1 is given by

$$P(l_1 \leq x) \leq \prod_{i=1}^{m} (F_{n1,n2}(\omega_i) \leq x)$$

and a lower bound for the distribution function of l_m is given by

$$P(l_m \leq x) \geq \prod_{i=1}^{m} (F_{n1,n2}(\omega_i) \geq x)$$

where $F_{n1,n2}(\omega_i)$ denotes a random variable having the noncentral F distribution on n1 and n2 degrees of freedom and noncentrality parameter ω_i.

Muirhead,R.J.; Chikuse,Y. (1975): Approximations for the distributions of the extreme latent roots of three matrices. Ann. Inst. Statist. Math., 27, 473-478

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.roy_glm_mu2_cdf(x, nu, nc); mx = mpm.roy_glm_mu2_cdf(x, nu, nc)
>>> ix = ipm.roy_glm_mu2_cdf(x, nu, nc); fx = fpm.roy_glm_mu2_cdf(x, nu, nc)
>>> gx = gmp.roy_glm_mu2_cdf(x, nu, nc); ax = apm.roy_glm_mu2_cdf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.5.9 Noncentral Roy's largest root under the independence alternative

`ctx.roy_ind_mu2_cdf(`x`)`

where `ctx` is `fpm`, `mpm`, `ipm`, `dec`, `gmp` or `apm`.

See Muirhead and Chikuse [417].

Let $l_1 \geq l_2 \geq \cdots \geq l_m > 0$ be the latent roots of $S_1 S_2^{-1}$.$Let`\Omega = \Sigma^{-1} M' M$, and ω_i are the latent roots of Ω. An upper bound for the distribution function of l_1 is given by

$$P(l_1 \leq x) \leq \prod_{i=1}^{m} (F_{n1,n2}(\omega_i) \leq x)$$

and a lower bound for the distribution function of l_m is given by

$$P(l_m \leq x) \geq \prod_{i=1}^{m} (F_{n1,n2}(\omega_i) \geq x)$$

where $F_{n1,n2}(\omega_i)$ denotes a random variable having the noncentral F distribution on n1 and n2 degrees of freedom and noncentrality parameter ω_i.

Muirhead,R.J.; Chikuse,Y. (1975): Approximations for the distributions of the extreme latent roots of three matrices. Ann. Inst. Statist. Math., 27, 473-478

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.roy_ind_mu2_cdf(x, nu, nc); mx = mpm.roy_ind_mu2_cdf(x, nu, nc)
>>> ix = ipm.roy_ind_mu2_cdf(x, nu, nc); fx = fpm.roy_ind_mu2_cdf(x, nu, nc)
>>> gx = gmp.roy_ind_mu2_cdf(x, nu, nc); ax = apm.roy_ind_mu2_cdf(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.6 Approximations based on hypergeometric functions of scalar argument

See also Koev and Edelman [393], Butler and Wood [167], Butler [165].

16.6.1 Hypergeometric function ${}_1F_1$ for matrix argument (Butler's approximation)

`ctx.hypermat_1f1_butler(`*res*, *a*, *b*, *X*`)`

where `ctx` is `dec`, `mpm`, `fpm`, `gmp` or `apm`.

Returns Butler's approximation to Kummer's confluent hypergeometric function for matrix argument, ${}_1F_1(a;b;\mathbf{T})$, which is defined as (see {NIST})

$$ {}_1F_1(a;b;\mathbf{T}) = \sum_{k=0}^{\infty} \frac{1}{k!} \sum_{|\kappa|=k} \frac{[a]_\kappa}{[b]_\kappa} Z_\kappa(\mathbf{T}) $$

with $-b + \frac{1}{2}(j+1) \notin \mathbb{N}, 1 \le j \le m; ||\mathbf{T}|| < 1$. Here $Z_\kappa(\mathbf{T})$ is a zonal polynomial.

Butler's approximation takes the form

$$ {}_1F_1(a;b;X) \approx \frac{b^{pb-p(p+1)/4}}{\sqrt{R_{1,1}}} \times \prod_{i=1}^{p} \left[\left(\frac{y_i}{a}\right)^a \left(\frac{1-y_i}{b-a}\right)^{b-a} e^{x_i y_i} \right], \quad \text{where} $$

$$ X = \text{diag}(x_1, \ldots, x_p, y_i = \frac{2a}{b - x_i + \sqrt{(x_i-b)^2 + 4ax_i}}, \text{ and} $$

$$ R_{1,1} = \prod_{i=1}^{p} \prod_{j=i}^{p} \left[\frac{y_i y_j}{a} + \frac{(1-y_i)(1-y_j)}{b-a} \right]. $$

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.hypermat_1f1_butler(x, nu, nc); mx = mpm.hypermat_1f1_butler(x, nu, nc)
>>> ix = ipm.hypermat_1f1_butler(x, nu, nc); fx = fpm.hypermat_1f1_butler(x, nu, nc)
>>> gx = gmp.hypermat_1f1_butler(x, nu, nc); ax = apm.hypermat_1f1_butler(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.6.2 Comparisons with MATLAB: some results

Text for examples

Matlab insert

EXAMPLE 1: CF of log MeansRatio RV with and n = 5 and alpha = 7/2

```
n     = 5;
alpha = 7/2;
t     = linspace(-100,100,201);
cf    = cf_LogRV_MeansRatioW(t,n,alpha);
figure; plot(t,real(cf),t,imag(cf)); grid on;
title('CF of log MeansRatio RV with and n = 5 and alpha = 7/2')
```

16.6.3 Hypergeometric function ${}_2F_1$ for matrix argument (Butler's approximation)

`ctx.hypermat_2f1_butler(`*res*, *a*, *b*, *c*, *X*`)`

where `ctx` is `dec`, `mpm`, `fpm`, `gmp` or `apm`.

Returns Butler's approximation to the Gauss hypergeometric function for matrix argument, ${}_2F_1(a, b; c; \mathbf{T})$, which is defined as (see {NIST})

$$ {}_2F_1(a, b; c; \mathbf{T}) = \sum_{k=0}^{\infty} \frac{1}{k!} \sum_{|\kappa|=k} \frac{[a]\,\kappa\,[b]\,\kappa}{[c]\,\kappa} Z_\kappa(\mathbf{T}) $$

with $-c + \frac{1}{2}(j+1) \notin \mathbb{N}, 1 \le j \le m; ||\mathbf{T}|| < 1$. Here $Z_\kappa(\mathbf{T})$ is a zonal polynomial.

Butler's approximation takes the form

$$ {}_2F_1(a, b; c; X) \approx \frac{c^{pc-p(p+1)/4}}{\sqrt{R_{2,1}}} \times \prod_{i=1}^{p} \left[\left(\frac{y_i}{a}\right)^a \left(\frac{1-y_i}{c-a}\right)^{c-a} (1 - x_i y_i)^{-b} \right], $$

where $X = \mathrm{diag}(x_1, \ldots, x_p)$, $S_i = x_i y_i (1 - y_i)/(1 - x_i y_i)$, $\tau_i = x_i(b - a) - c$,

$$ y_i = \frac{2a}{\sqrt{t_i^2 - 4a x_i (c - b)} - \tau_i}, \text{ and} $$

$$ R_{2,1} = \prod_{i=1}^{p} \prod_{j=i}^{p} \left[\frac{y_i y_j}{a} + \frac{(1 - y_i)(1 - y_j)}{c - a} - \frac{b}{a(c - a)} S_i S_j \right]. $$

An example (CDF):

```
>>> from xlcalcnet import fpm, mpm
>>> mpm.dps = 40; x = 12; nu = 10; nc = 30
>>> dx = dec.hypermat_2f1_butler(x, nu, nc); mx = mpm.hypermat_2f1_butler(x, nu, nc)
>>> ix = ipm.hypermat_2f1_butler(x, nu, nc); fx = fpm.hypermat_2f1_butler(x, nu, nc)
>>> gx = gmp.hypermat_2f1_butler(x, nu, nc); ax = apm.hypermat_2f1_butler(x, nu, nc)
>>> mpm.show([dx, mx, ix, fx, gx, ax])
dec:  3.113877423416836055714616090074444149943E-1
mpm:  3.113877423416836055714616090074444149943e-1
ipm:  3.113877423416836055714616090074444149944e-1 (4.147e-38%)
fpm:  3.11387742341684E-01
gmp:  3.113877423416836055714616090074444149943E-01
ipm:  3.113877423416836055714616090074444149943e-1 (4.055e-38%)
```

16.6.4 Comparison with MATLAB: some results

Text for examples

Matlab insert

EXAMPLE 1: CF of log MeansRatio RV with and n = 5 and alpha = 7/2

```
n     = 5;
alpha = 7/2;
t     = linspace(-100,100,201);
cf    = cf_LogRV_MeansRatioW(t,n,alpha);
figure; plot(t,real(cf),t,imag(cf)); grid on;
title('CF of log MeansRatio RV with and n = 5 and alpha = 7/2')
```

Part IV

Gallery of Plots

CHAPTER

SEVENTEEN

VISUALISATION OF DATASETS

Text explaining the use of the Gallery

Text explaining the use of the Visualisation of datasets

17.1 Bar Charts

17.1.1 Bar chart, part 1

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_BarChartPart1.py, and the XML code in the file D01_BarChartPart1.2D.xml.

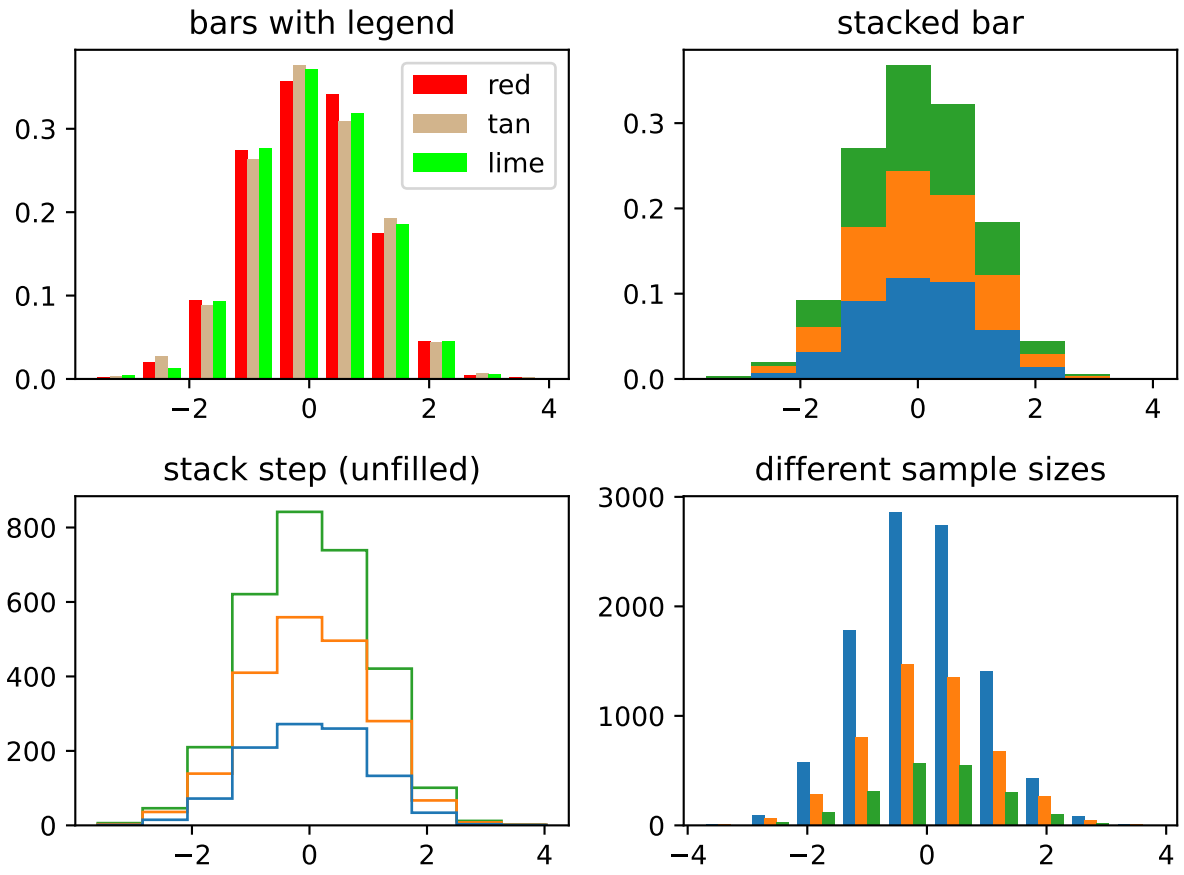

Bar chart, part 1

17.1.2 Bar chart, part 2

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02_BarChartPart2.py, and the XML code in the file D02_BarChartPart2.2D.xml.

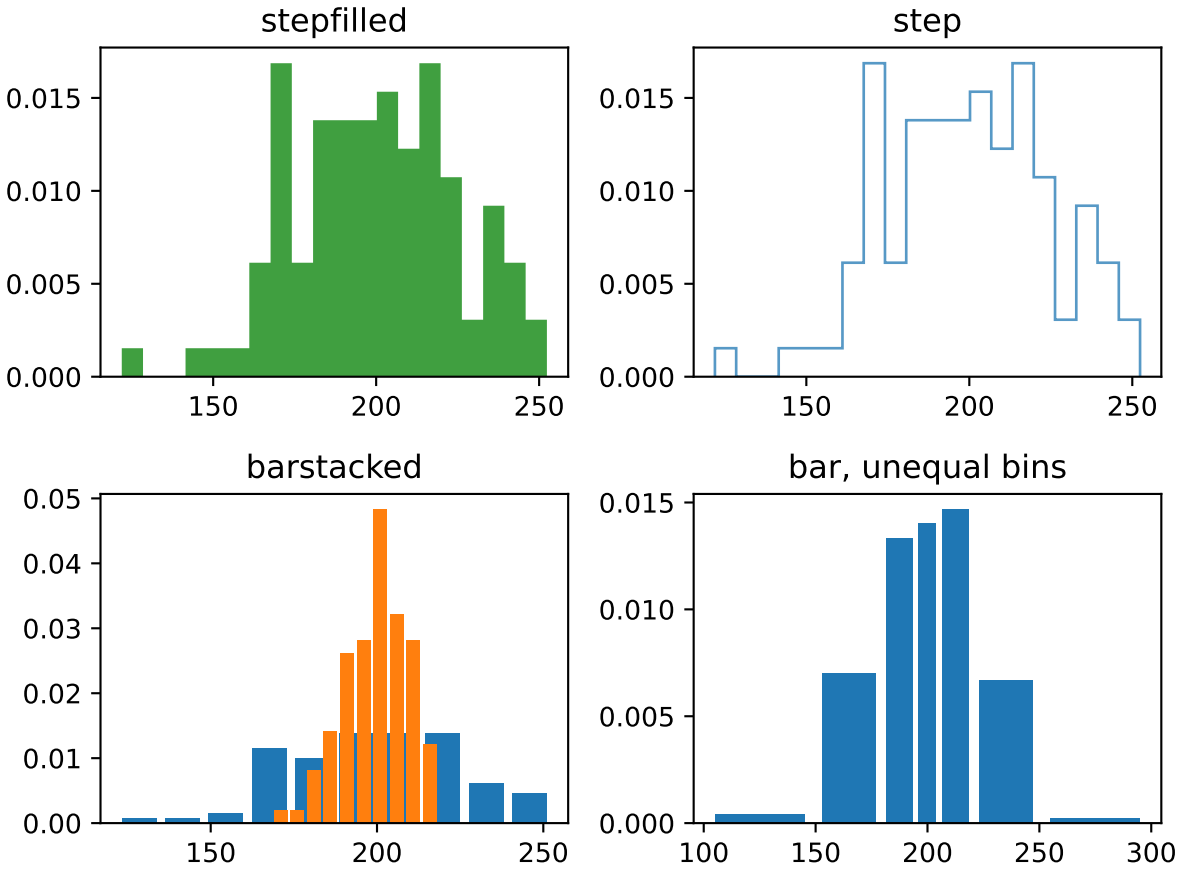

Bar chart, part 2

17.1.3 Stacked Bar Plot

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03_StackedBarPlot.py, and the XML code in the file D03_StackedBarPlot.2D.xml.

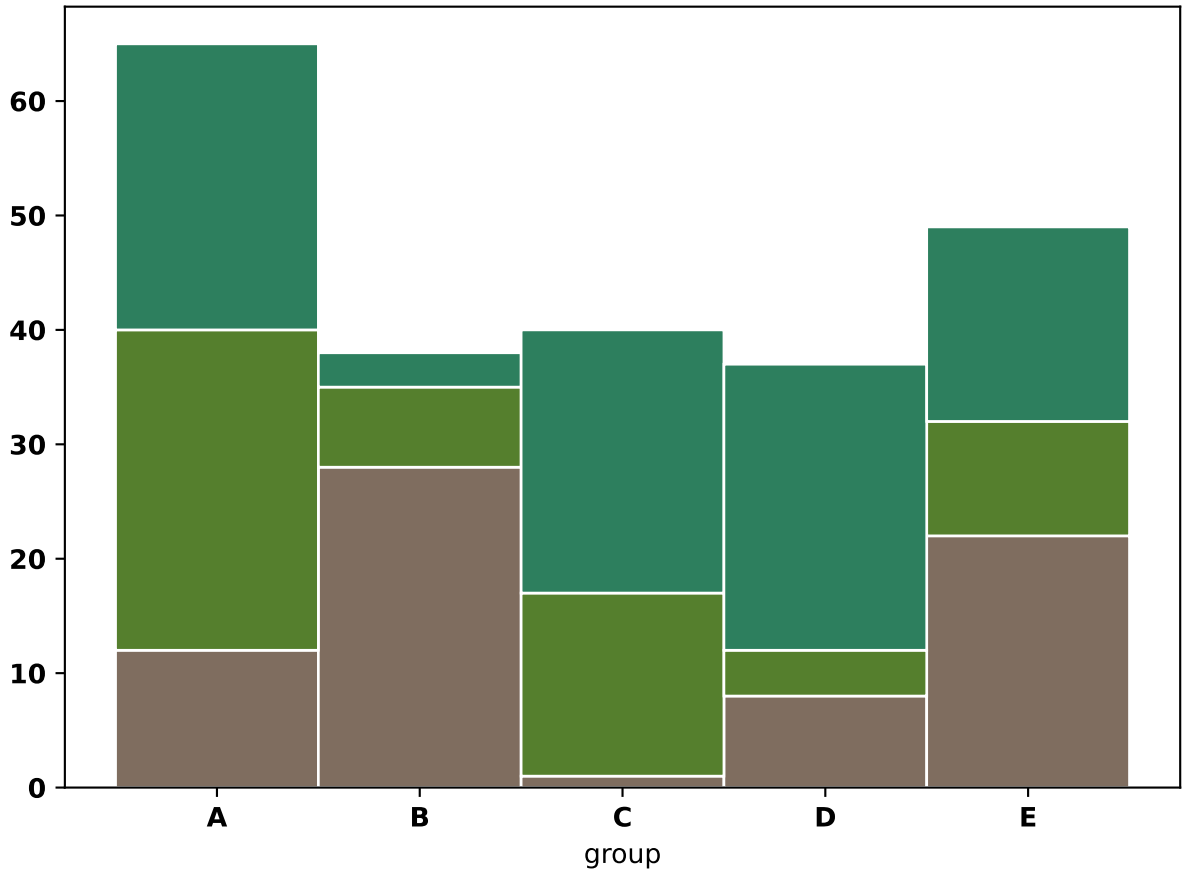

17.1.4 Grouped Bar Plot

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04_GroupedBarPlot.py, and the XML code in the file D04_GroupedBarPlot.2D.xml.

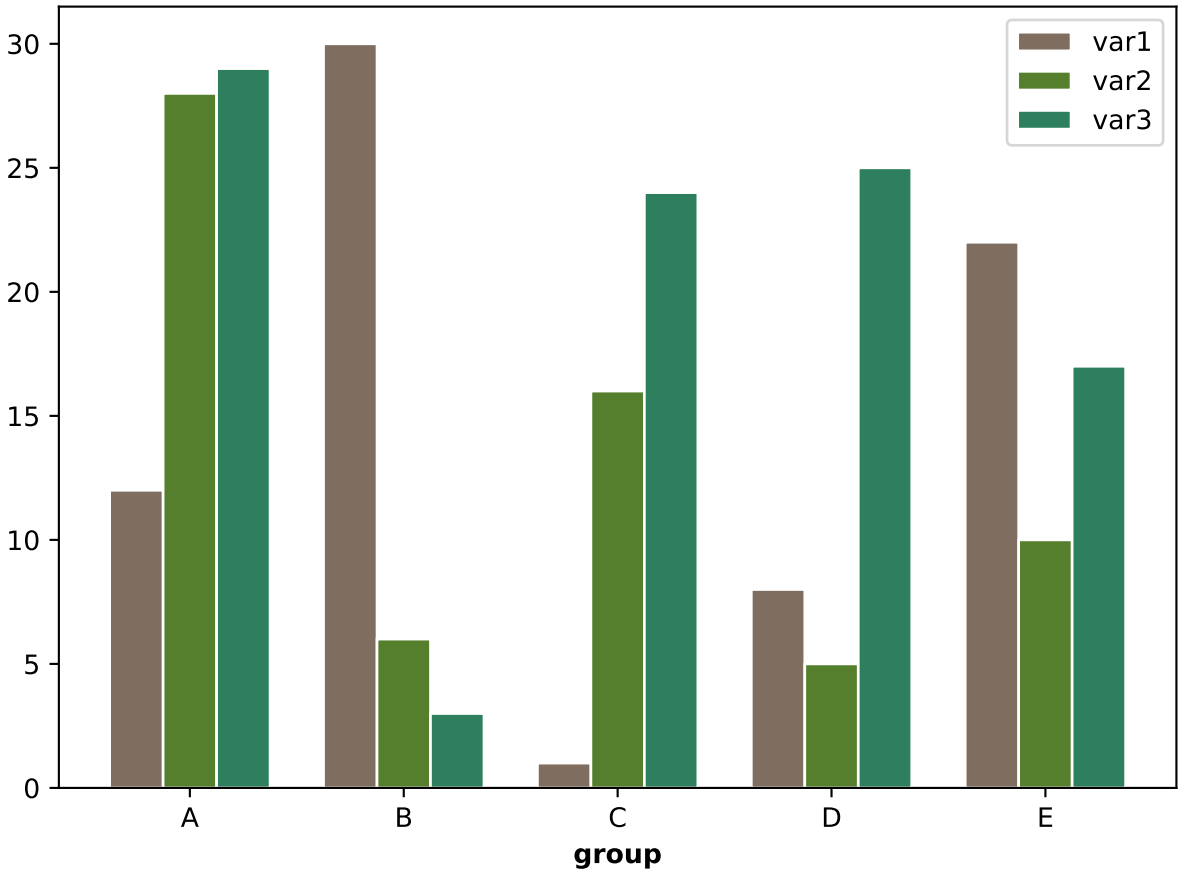

17.1.5 Grouped StackedBar Plot

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05_GroupedStackedBarPlot.py, and the XML code in the file D05_GroupedStackedBarPlot.2D.xml.

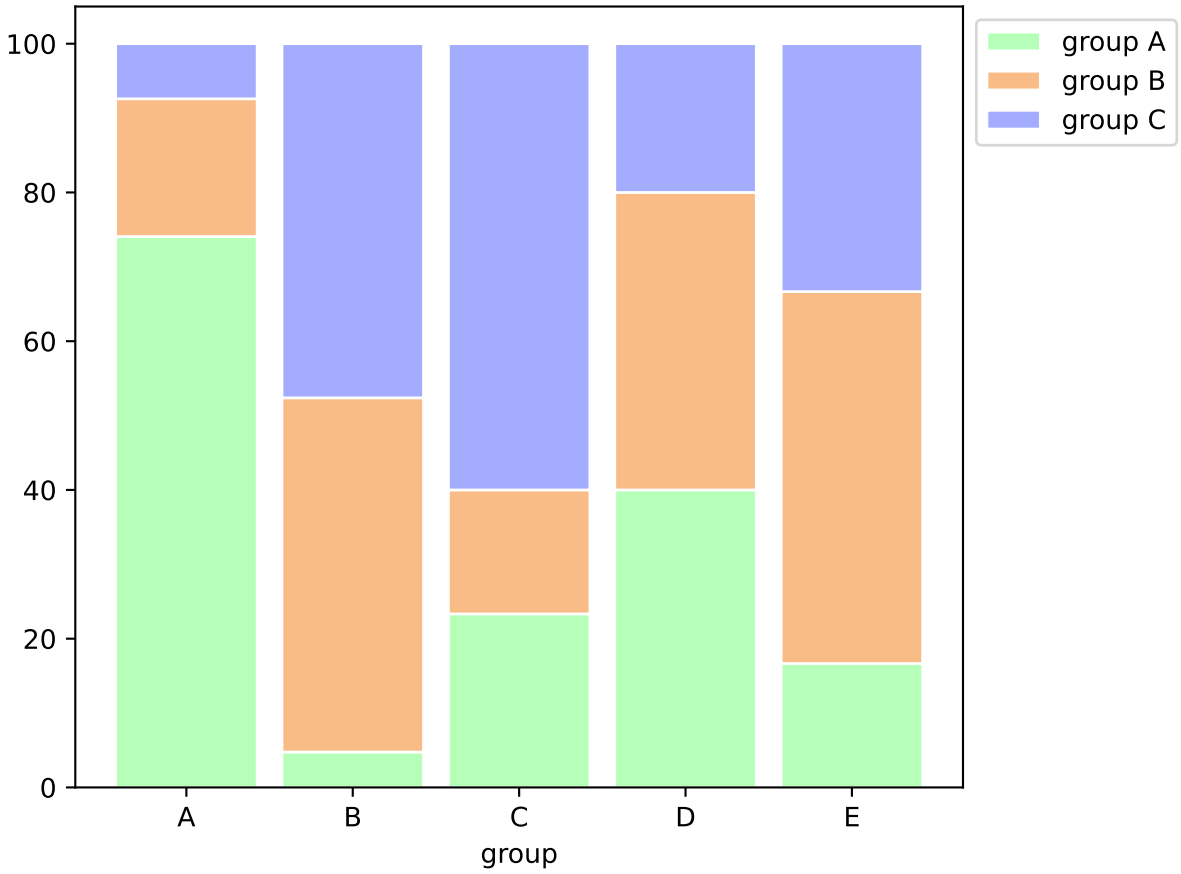

17.1.6 Barplot with error bar

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06_BarPlotWithErrorBar.py, and the XML code in the file D06_BarPlotWithErrorBar.2D.xml.

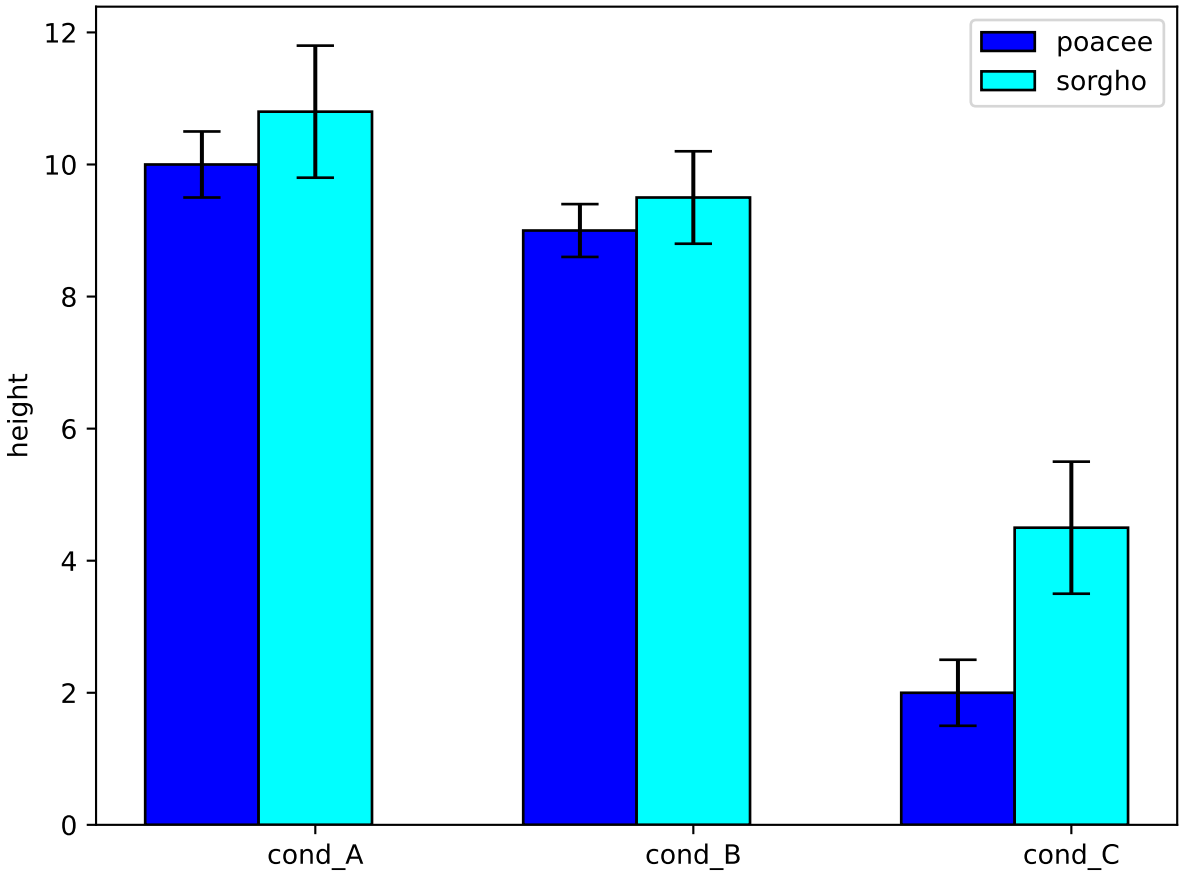

17.1.7 Waterfall Plot

The Python code for the first example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07a_WaterfallChart1.py, and the XML code in the file D07a_WaterfallChart1.2D.xml.

The Python code for the second example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07b_WaterfallChart2.py, and the XML code in the file D07b_WaterfallChart2.2D.xml.

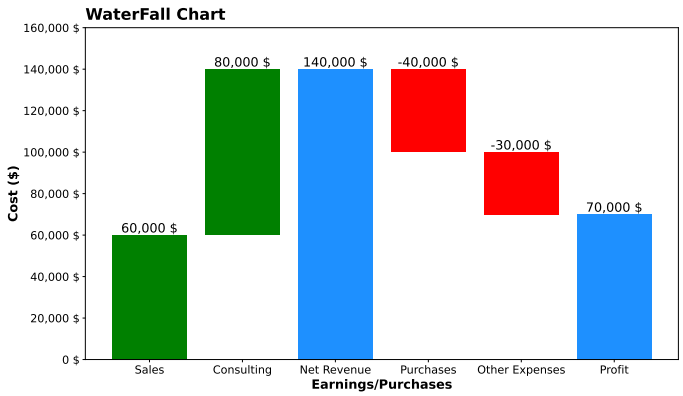

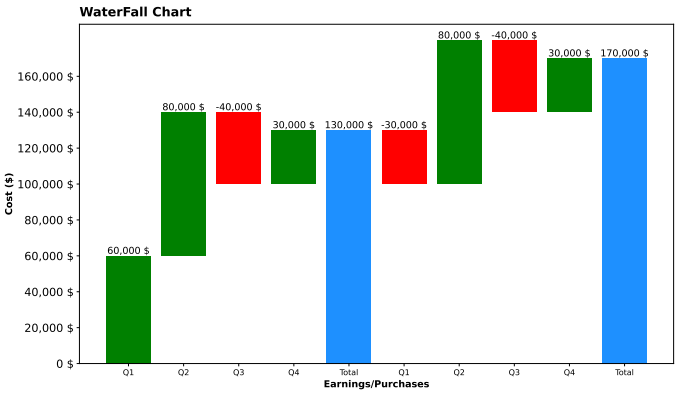

17.1.8 Mirror Histogram

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D08_MirrorHistogram.py, and the XML code in the file D08_MirrorHistogram.2D.xml.

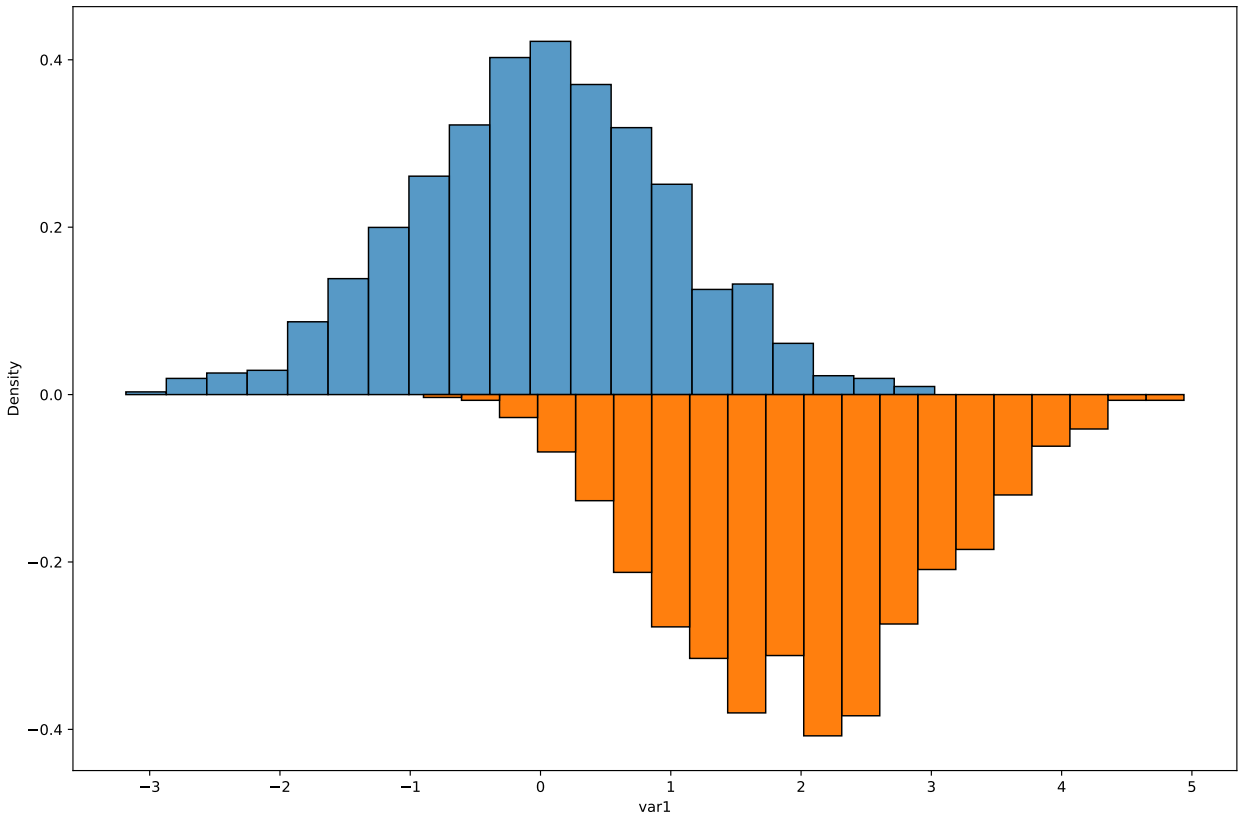

17.1.9 Horizontal Bar

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D09_HorizontalBarDist.py, and the XML code in the file D09_HorizontalBarDist.2D.xml.

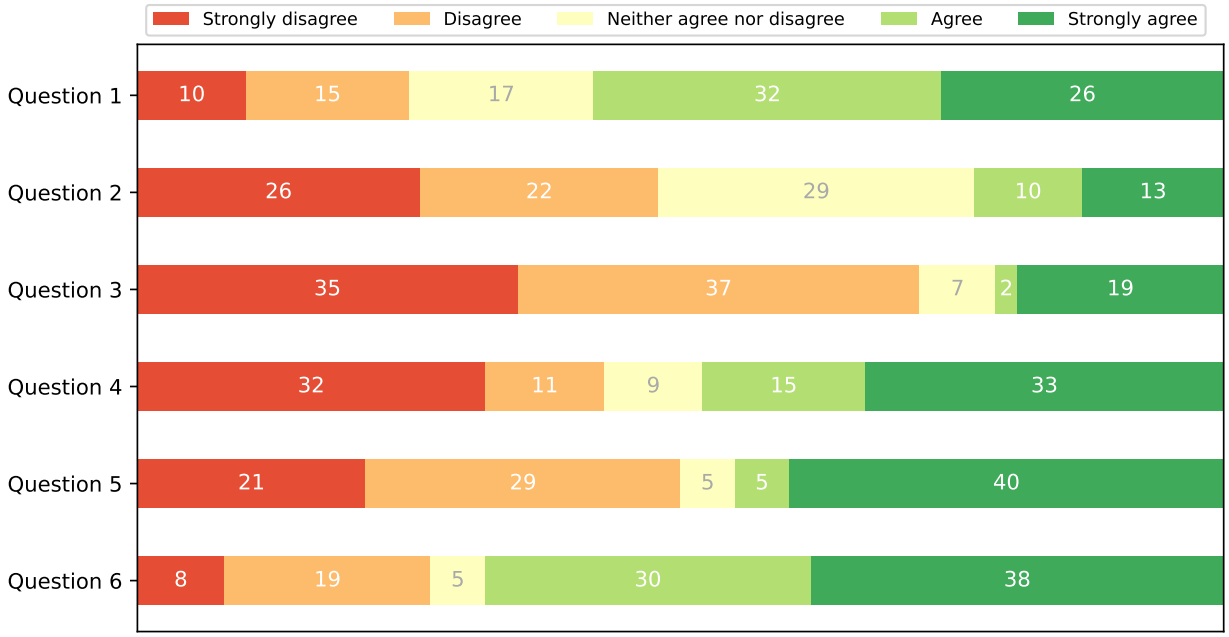

17.1.10 Horizontal Error Bar

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D10_HorizontalErrorBar.py, and the XML code in the file D10_HorizontalErrorBar.2D.xml.

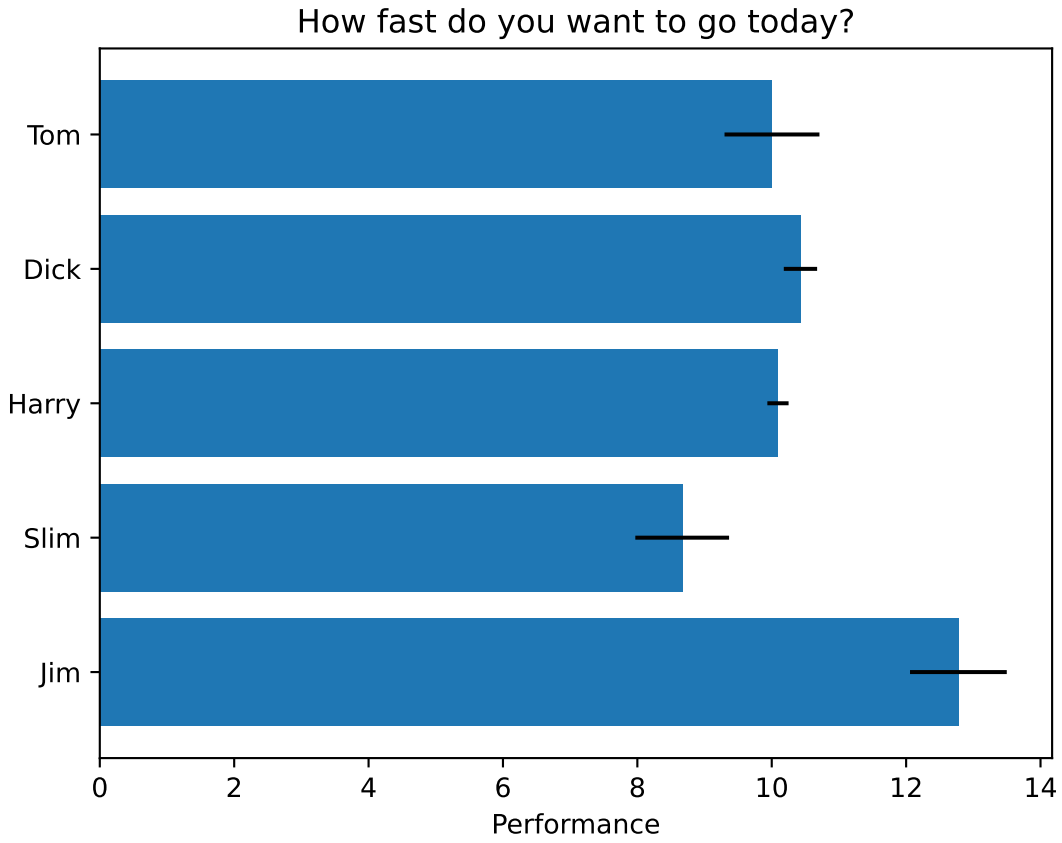

17.1.11 Stacked horizontal bar with labels

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D11_StackedHBarWithLabels.py, and the XML code in the file D11_StackedHBarWithLabels.2D.xml.

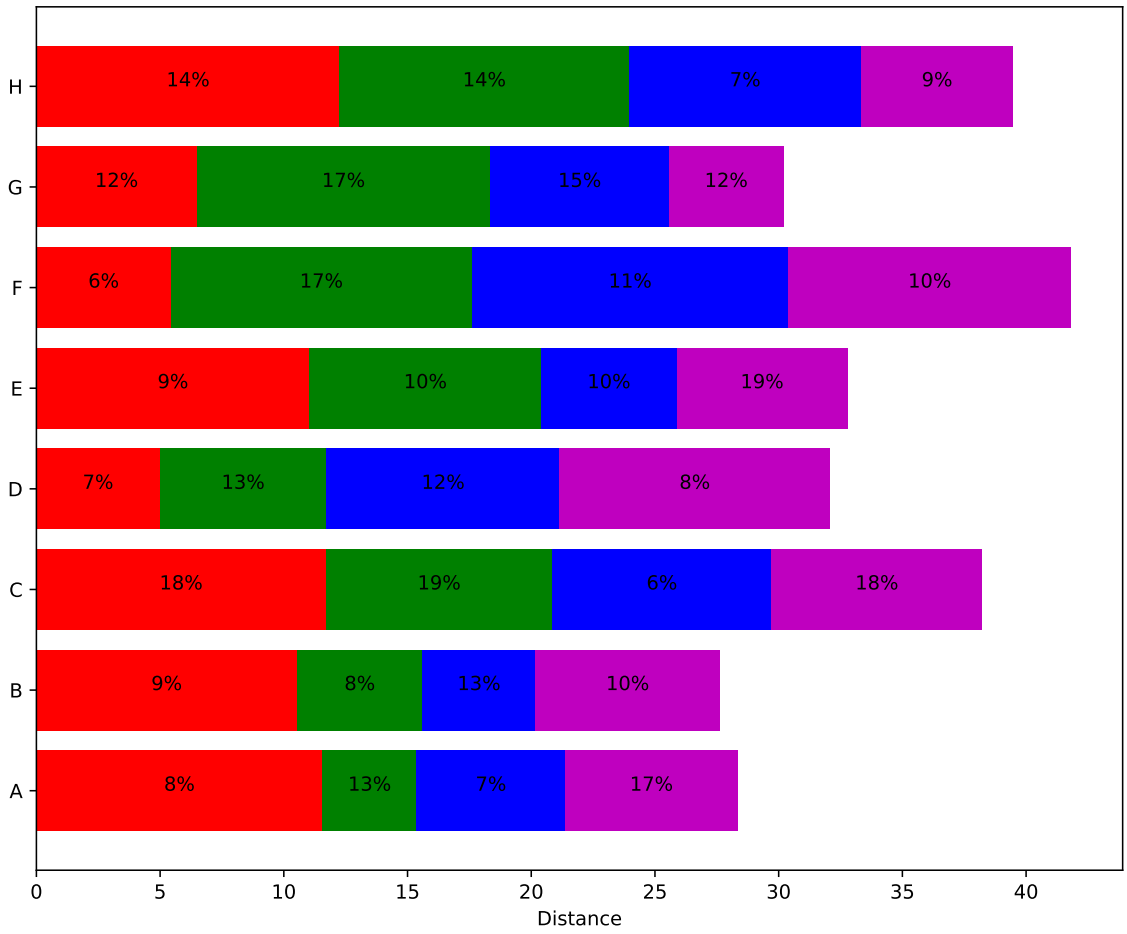

17.1.12 Stacked and grouped horizontal bar

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D12_StackedAndGroupedHBar.py, and the XML code in the file D12_StackedAndGroupedHBar.2D.xml.

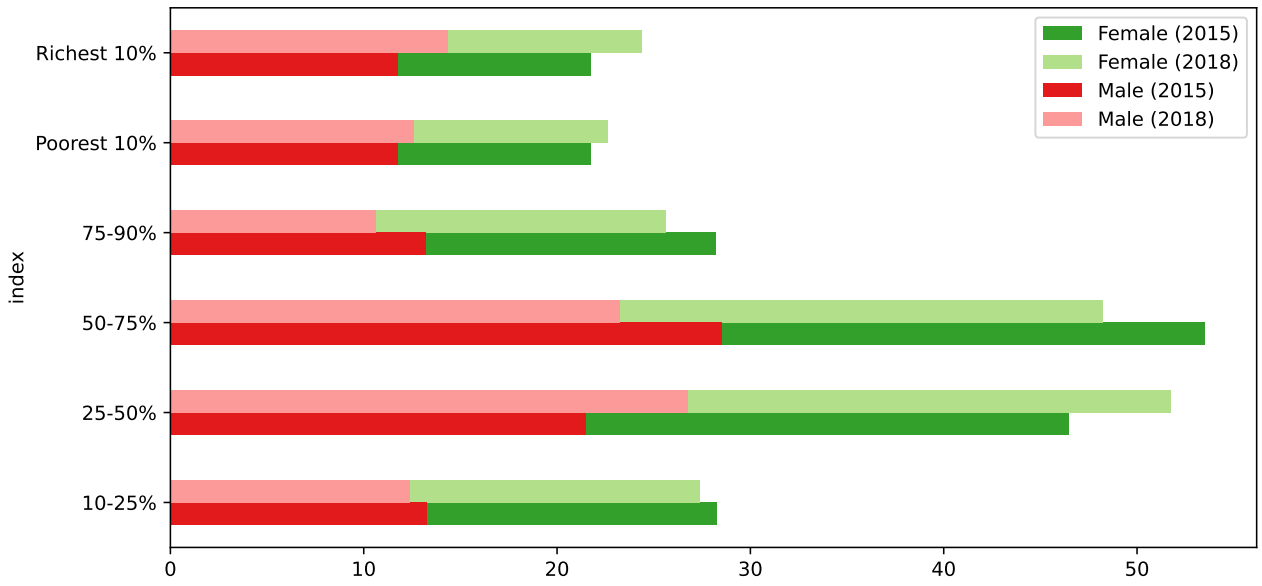

17.1.13 Gantt Chart

The Python code for the first example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D13a_GanttChart1.py, and the XML code in the file D13a_GanttChart1.2D.xml.

The Python code for the second example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D13b_GanttChart2.py, and the XML code in the file D13b_GanttChart2.2D.xml.

The Python code for the third example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D13c_GanttChart3.py, and the XML code in the file D13c_GanttChart3.2D.xml.

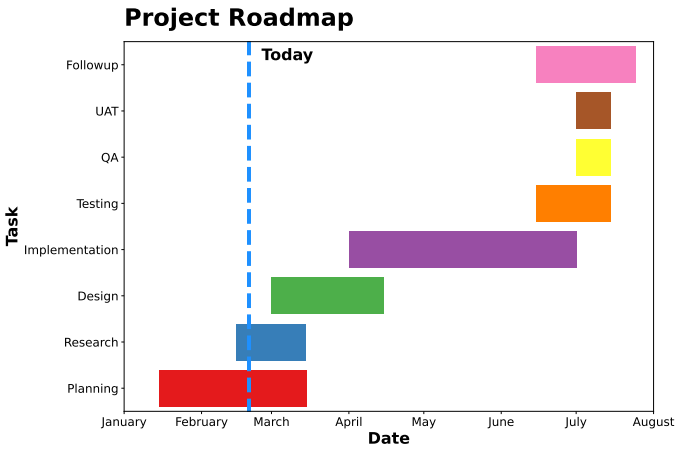

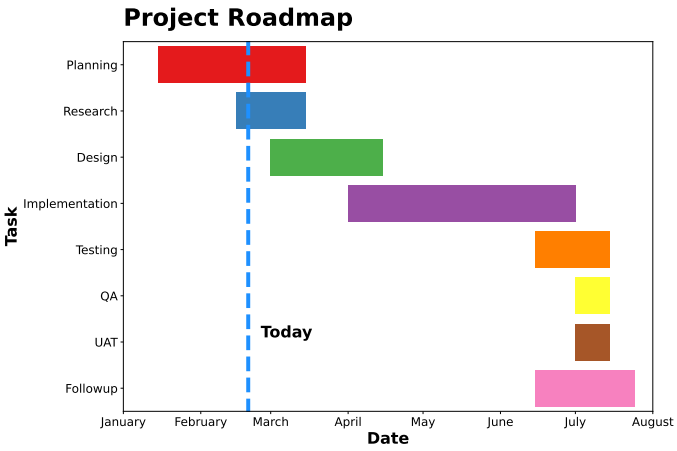

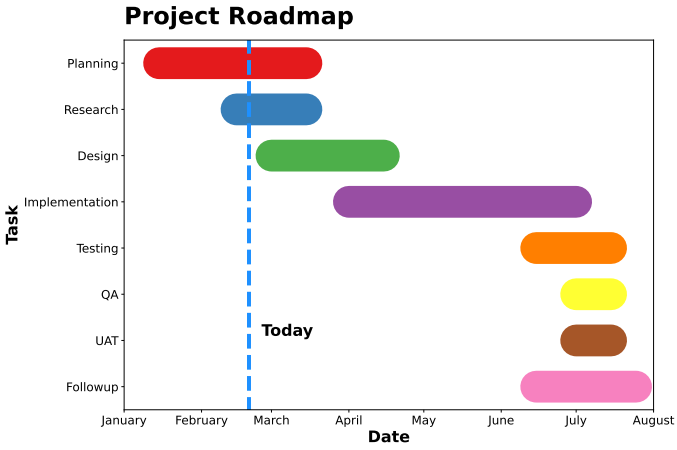

17.1.14 Marketing Funnel

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D14_MarketingFunnel.py, and the XML code in the file D14_MarketingFunnel.2D.xml.

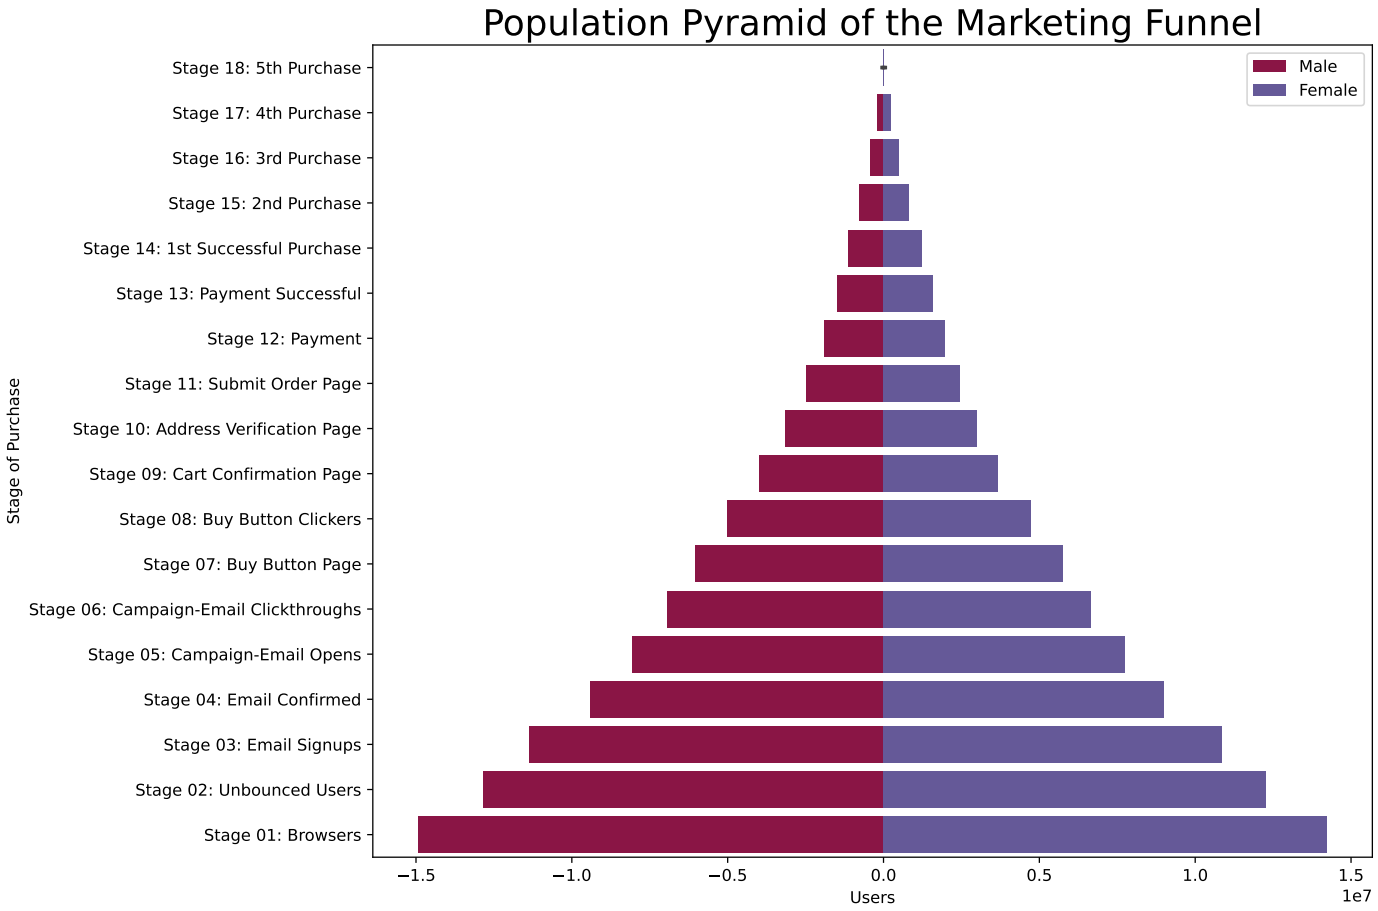

Some text

17.1.15 Population Pyramid

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D15_PopulationPyramid.py, and the XML code in the file D15_PopulationPyramid.2D.xml.

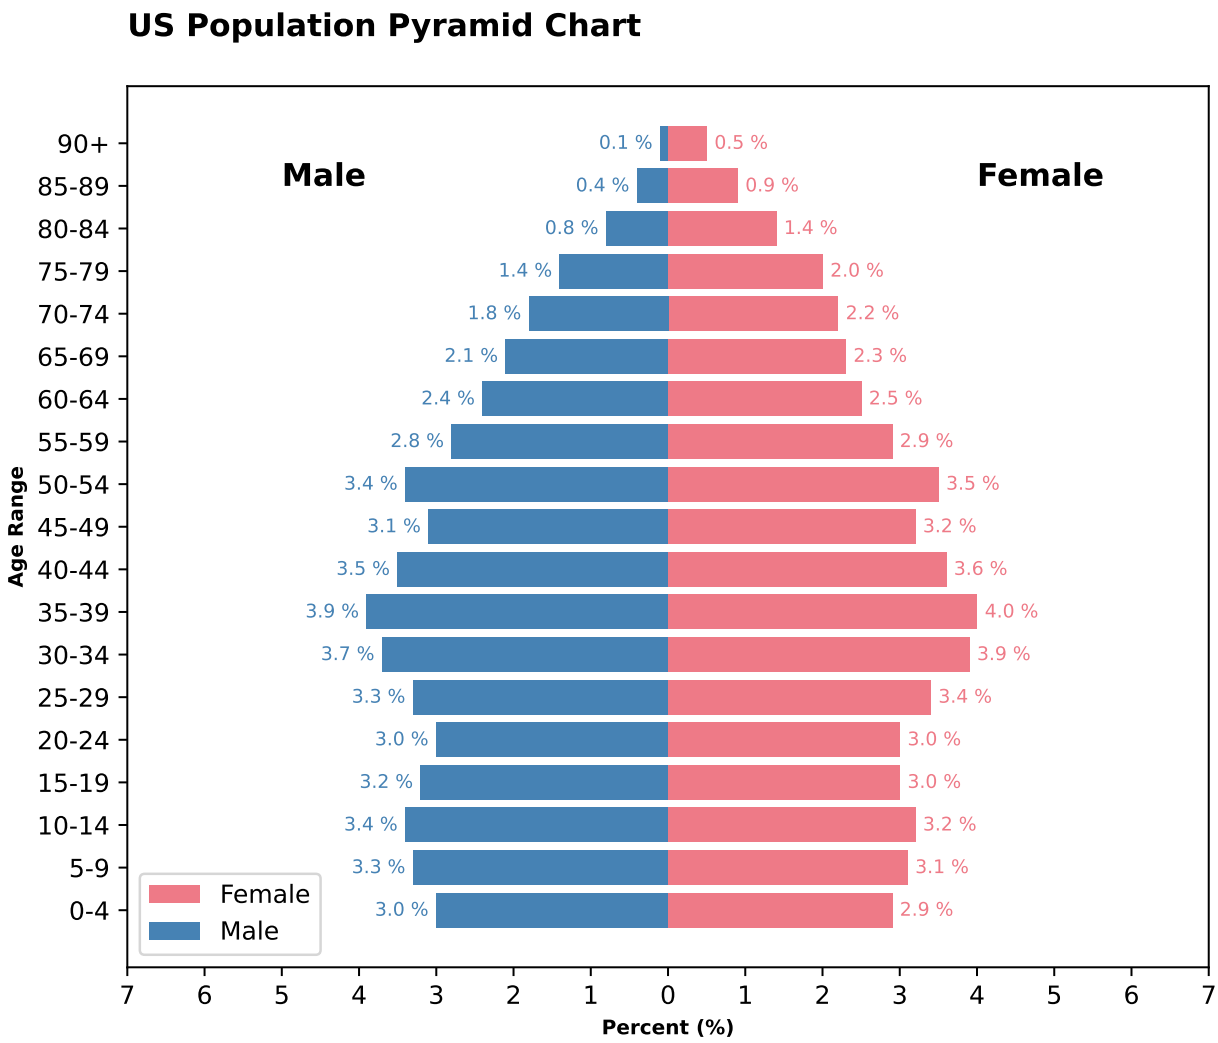

17.1.16 Mirror Bar Plot (horizontal)

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D16_MirrorBarPlot.py, and the XML code in the file D16_MirrorBarPlot.2D.xml.

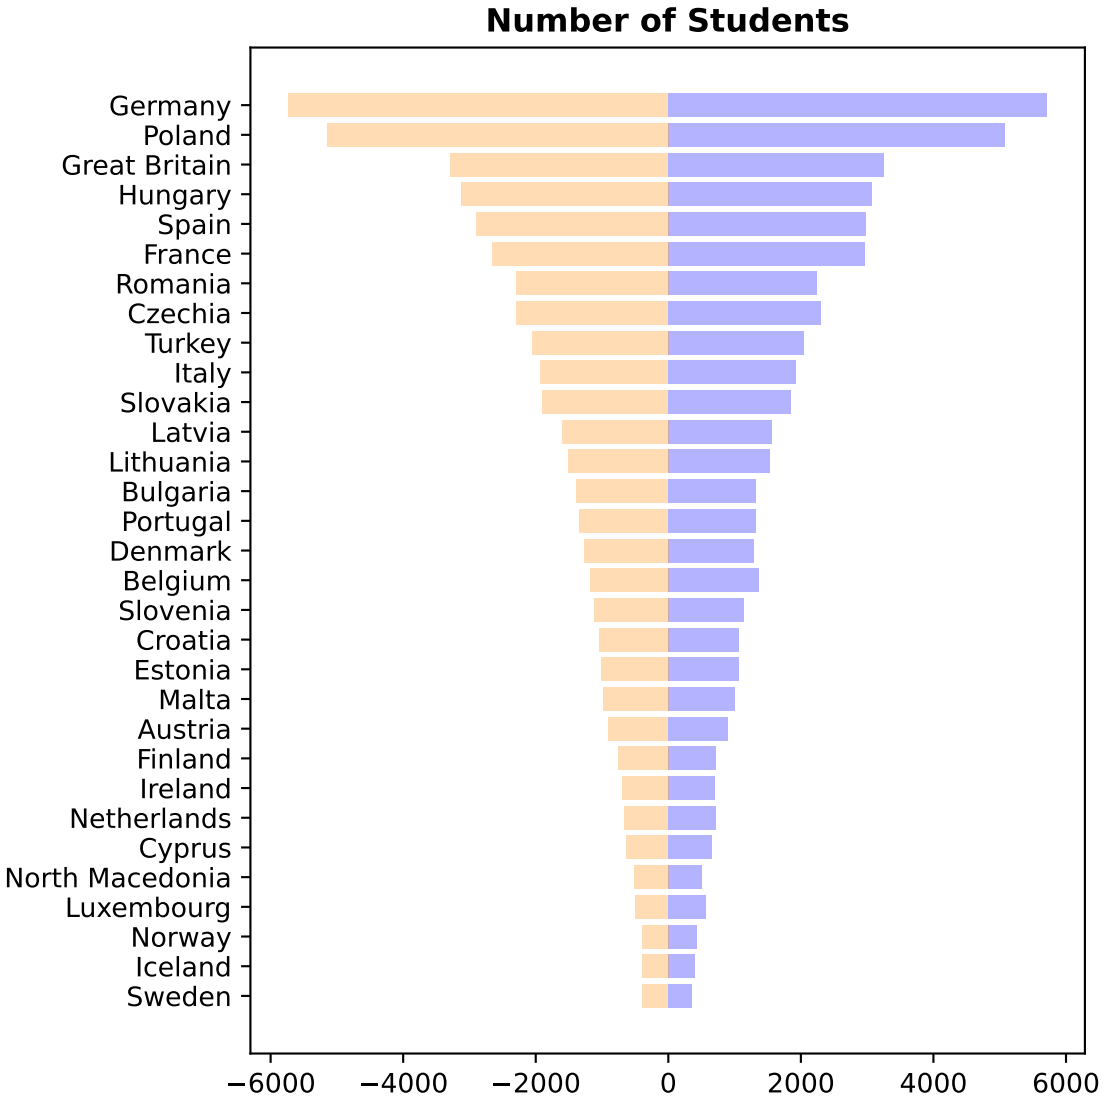

17.1.17 Tornado Chart

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D17_TornadoChart.py, and the XML code in the file D17_TornadoChart.2D.xml.

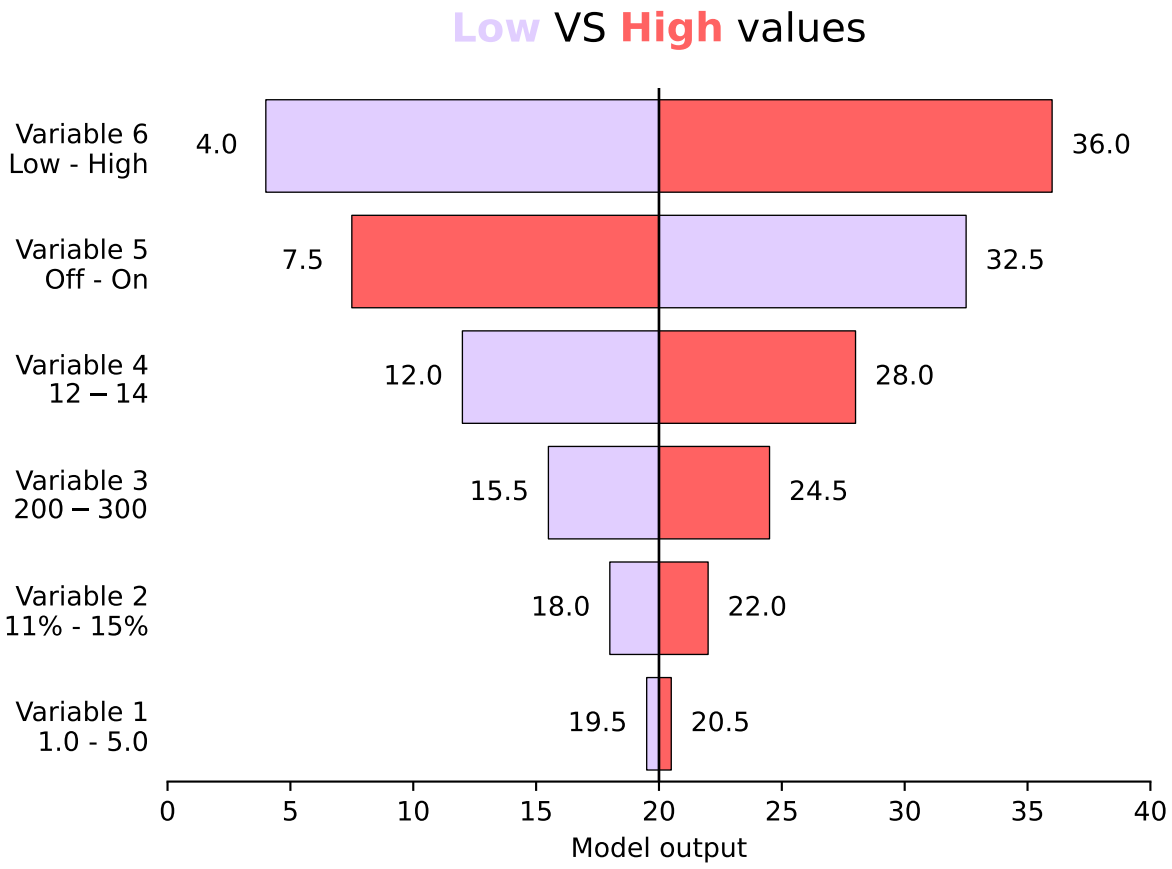

17.1.18 Circular Barplot

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D18_CircularBarplot.py, and the XML code in the file D18_CircularBarplot.2D.xml.

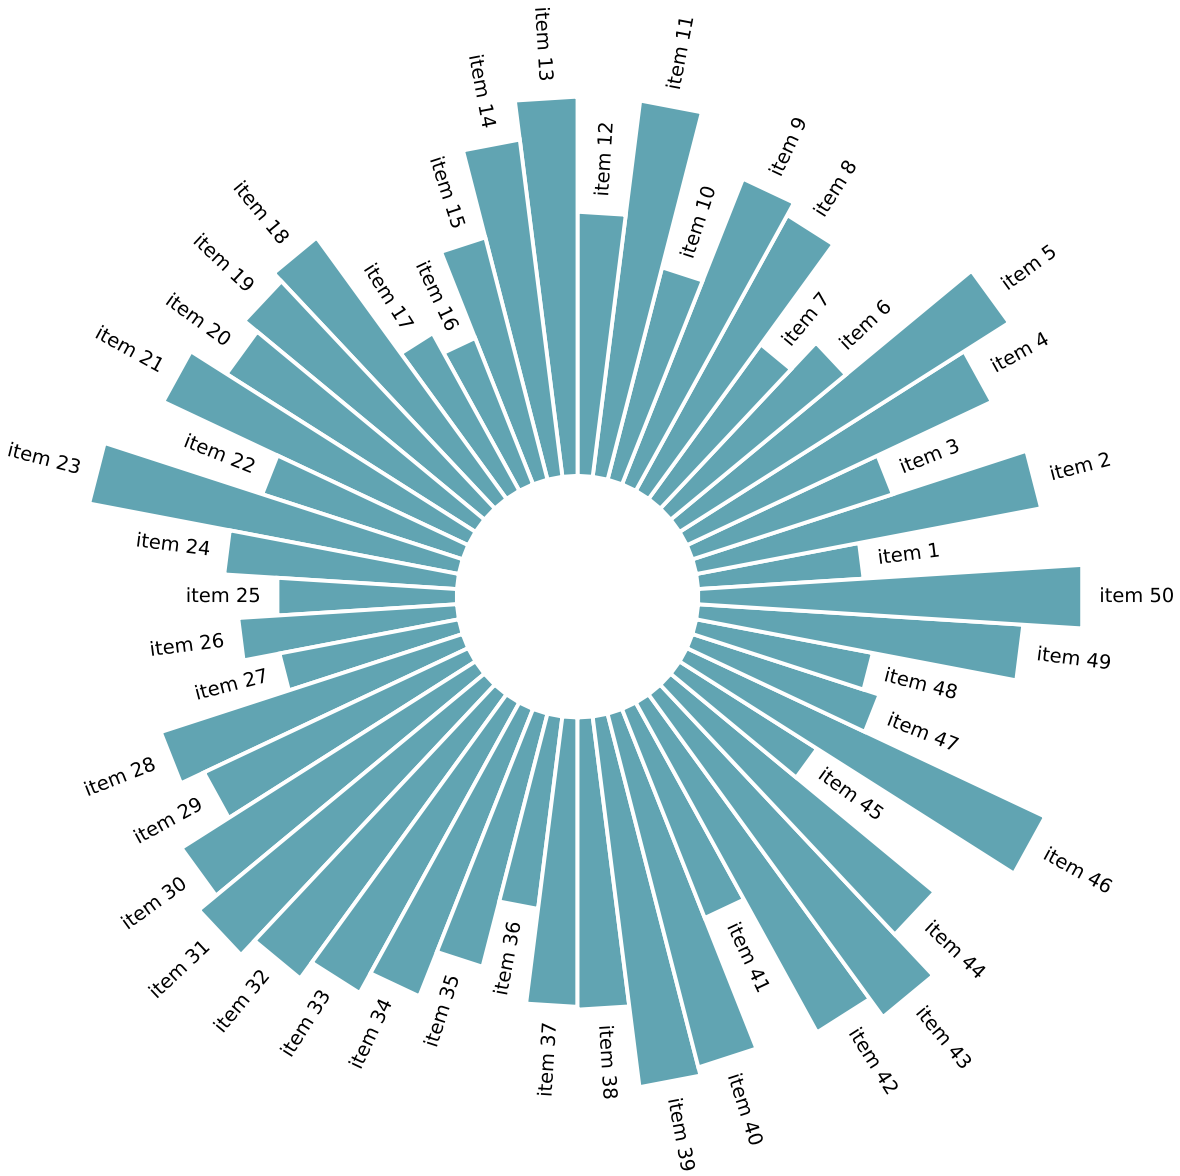

17.1.19 Barplot with color

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D19_BarplotColor.py, and the XML code in the file D19_BarplotColor.2D.xml.

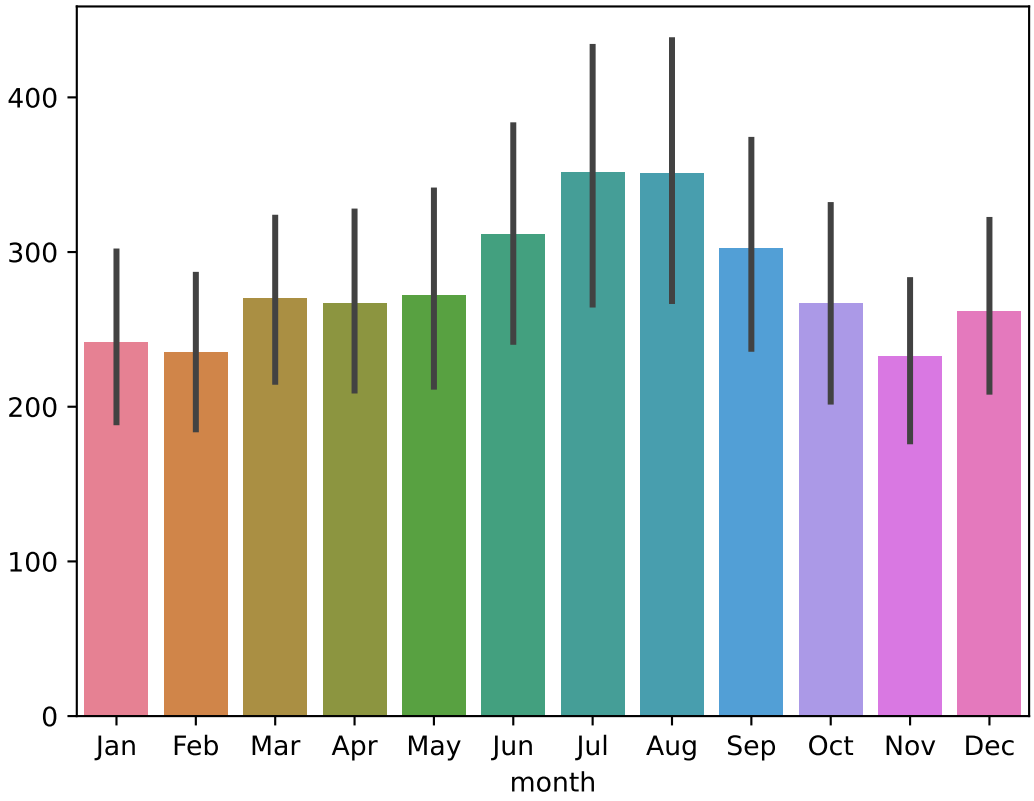

17.2 Line and lollipop charts

17.2.1 Line chart (Seaborn)

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_LineChartSeaborn.py, and the XML code in the file D01_LineChartSeaborn.2D.xml.

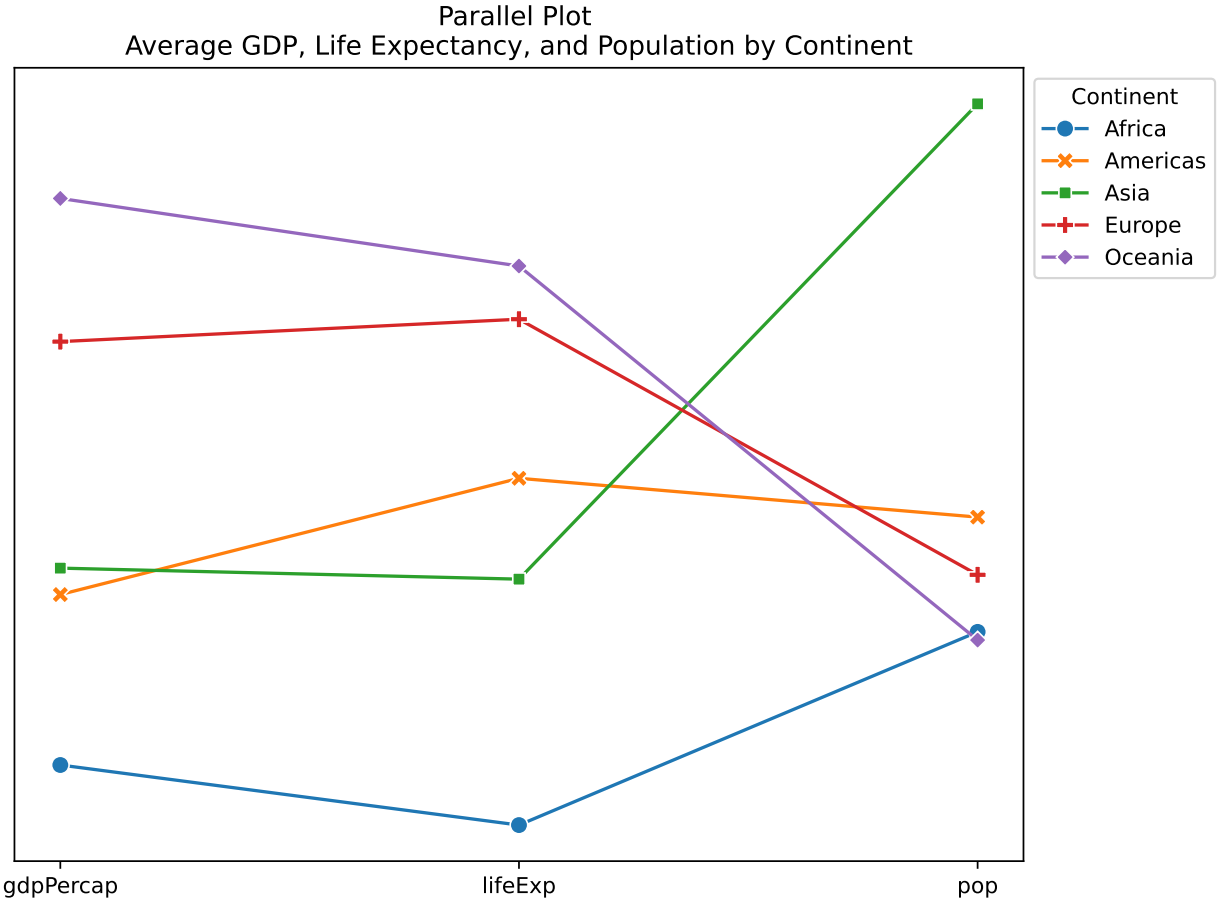

17.2.2 Slope Chart

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02_SlopeCharts.py, and the XML code in the file D02_SlopeCharts.2D.xml.

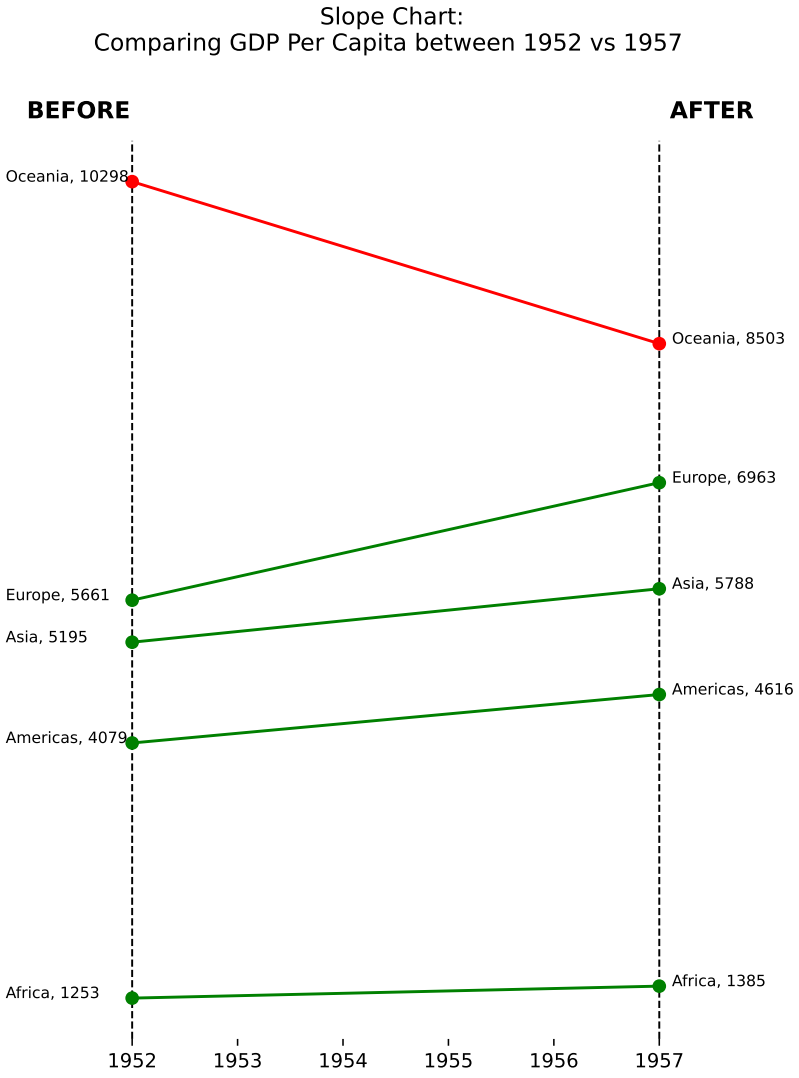

17.2.3 Line chart with error Bar

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03_LineErrorBars.py, and the XML code in the file D03_LineErrorBars.2D.xml.

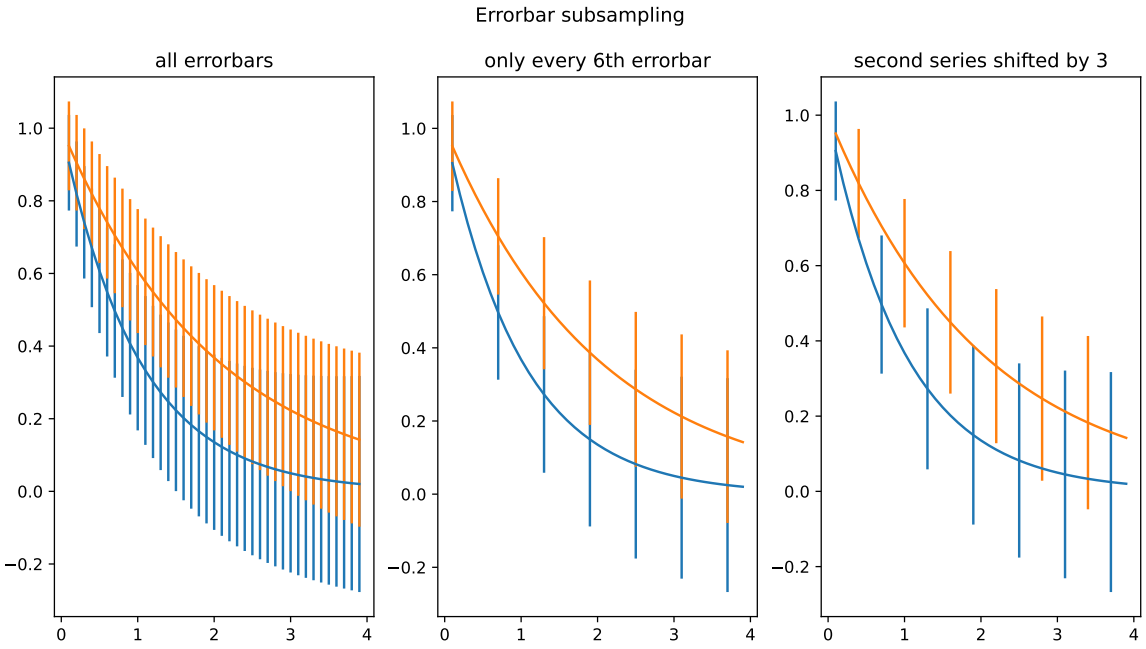

17.2.4 Confidence band (RandomWalk)

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04_ConfidenceBand_RandomWalk.py, and the XML code in the file D04_ConfidenceBand_RandomWalk.2D.xml.

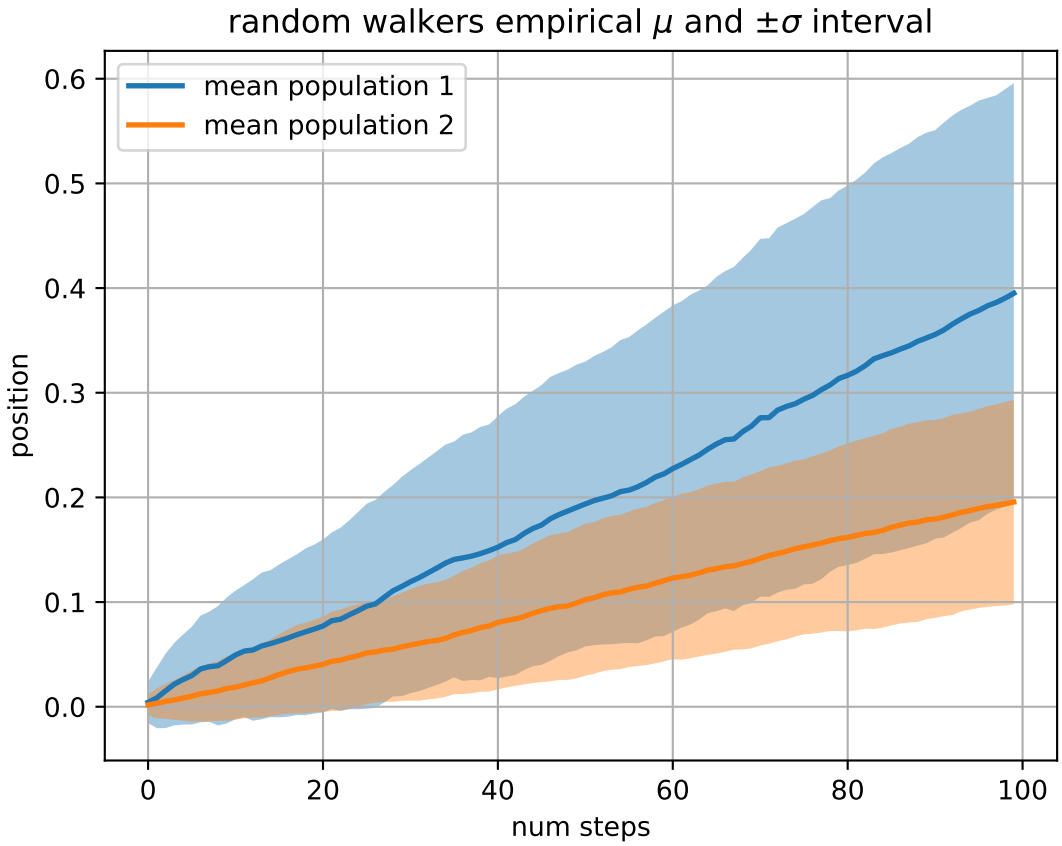

17.2.5 Plotting Parallel (Pandas)

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05_PandasPlottingParallel.py, and the XML code in the file D05_PandasPlottingParallel.2D.xml.

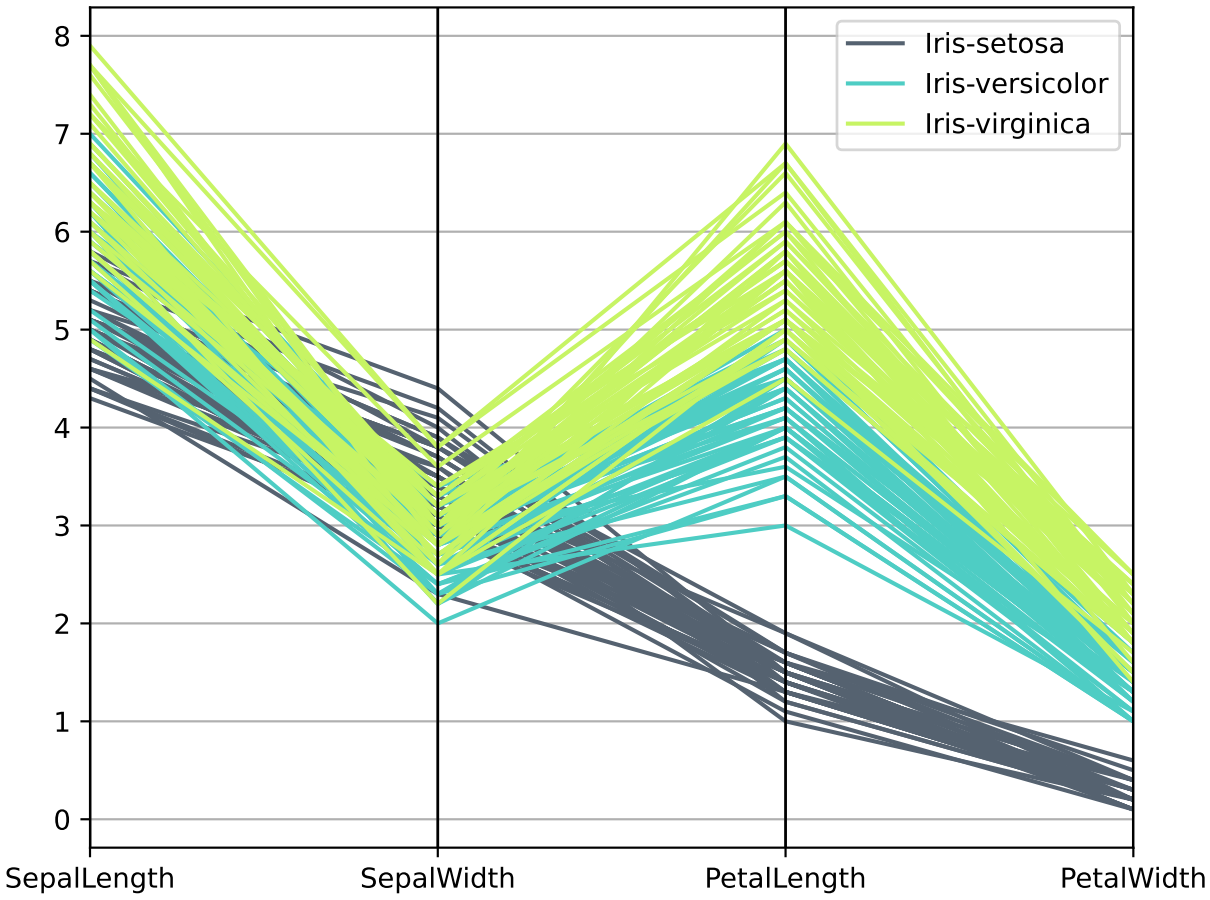

17.2.6 Andrew Curves (Pandas)

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06_PandasAndrewCurves.py, and the XML code in the file D06_PandasAndrewCurves.2D.xml.

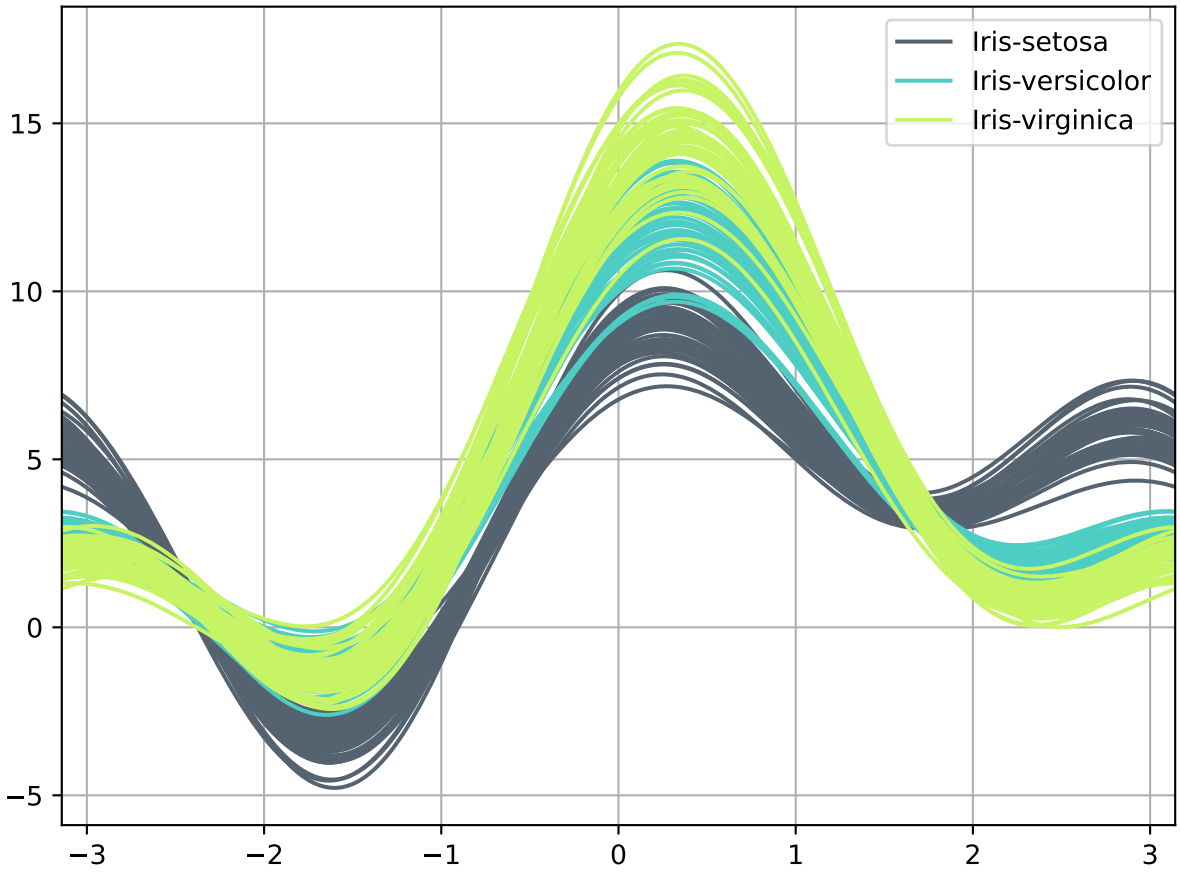

17.2.7 Highlighted LinePlot

The Python code for the first example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07a_HighlightedLinePlot1.py, and the XML code in the file D07a_HighlightedLinePlot1.2D.xml.

The Python code for the second example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07b_HighlightedLinePlot2.py, and the XML code in the file D07b_HighlightedLinePlot2.2D.xml.

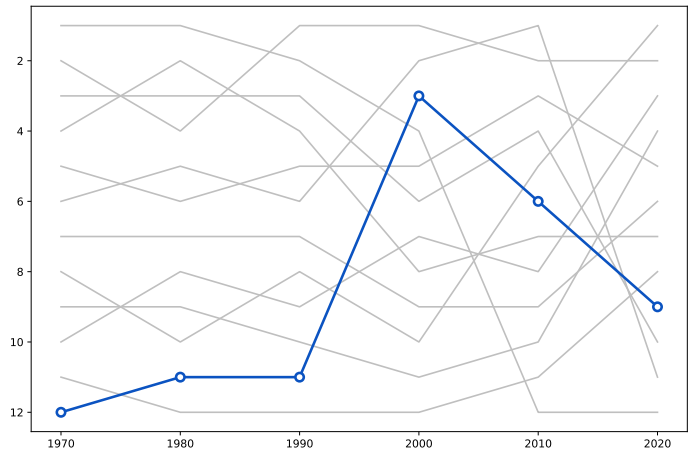

Some text

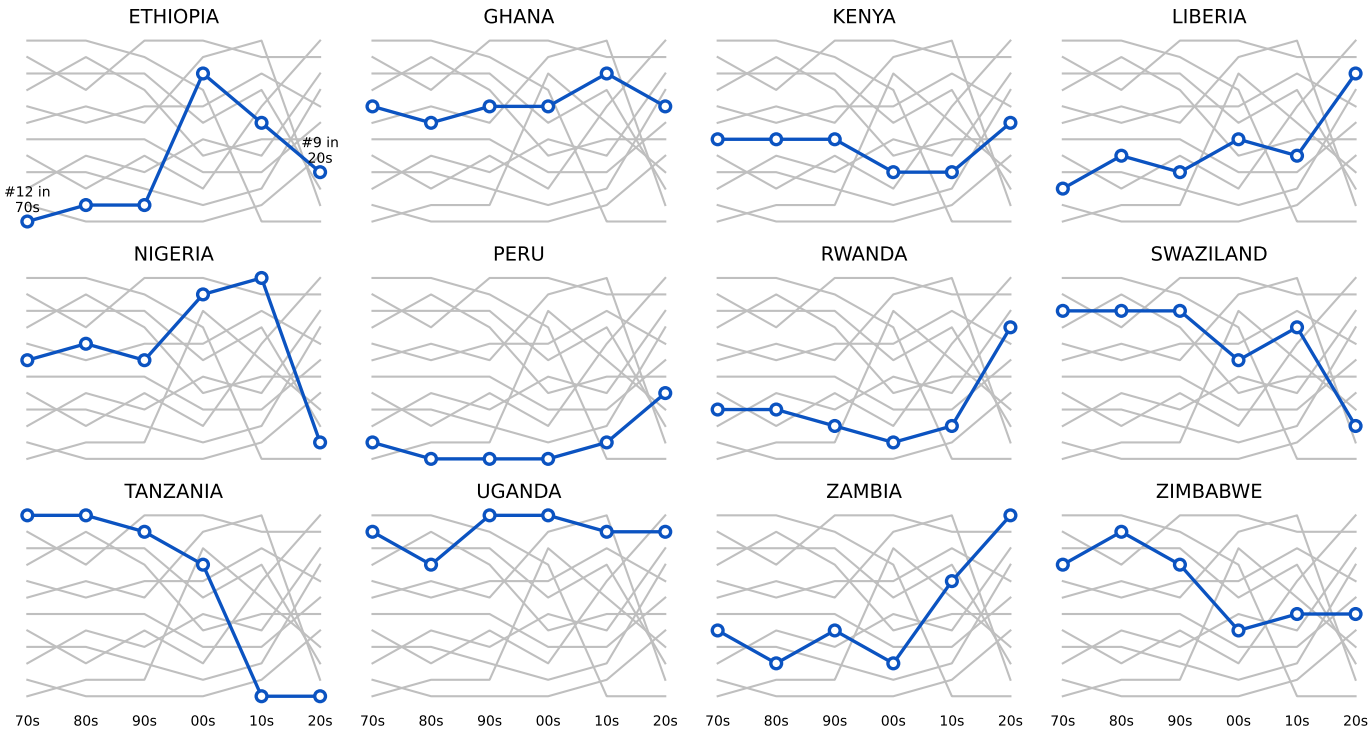

Some text

17.2.8 Multiple Lines And Panels

The Python code for the first example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D08a_MultipleLinesAndPanels1.py, and the XML code in the file D08a_MultipleLinesAndPanels1.2D.xml.

The Python code for the second example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D08b_MultipleLinesAndPanels2.py, and the XML code in the file D08b_MultipleLinesAndPanels2.2D.xml.

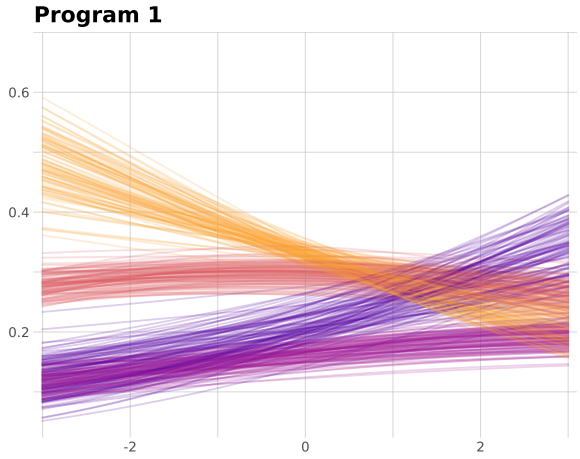

Some text

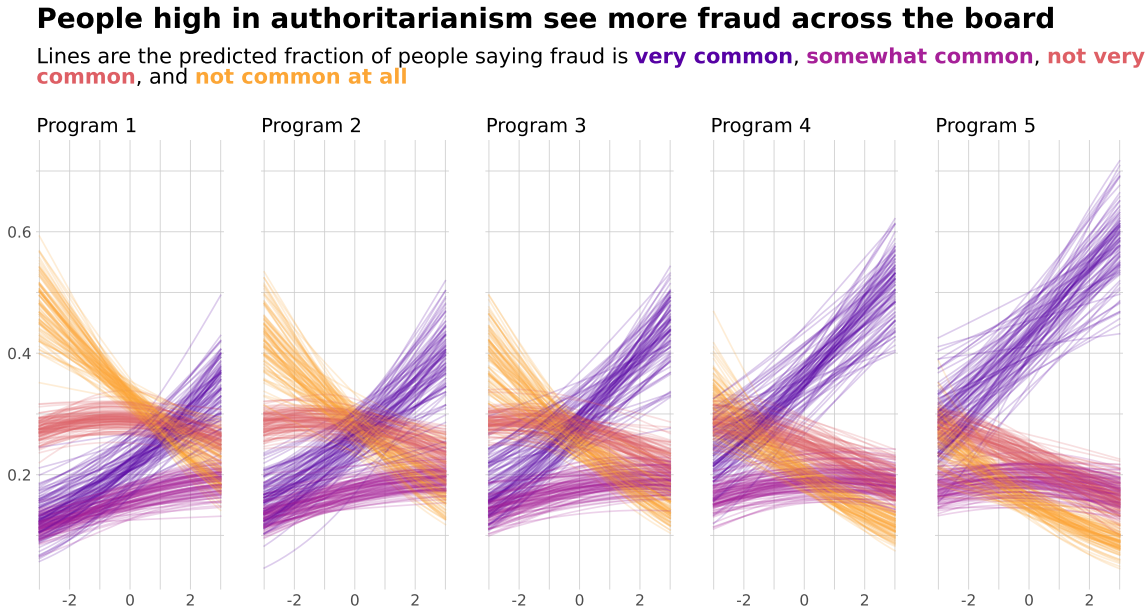

Some text

17.2.9 Line chart with fancy formatting

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D09_LineChartWithFancyFormatting.py, and the XML code in the file D09_LineChartWithFancyFormatting.2D.xml.

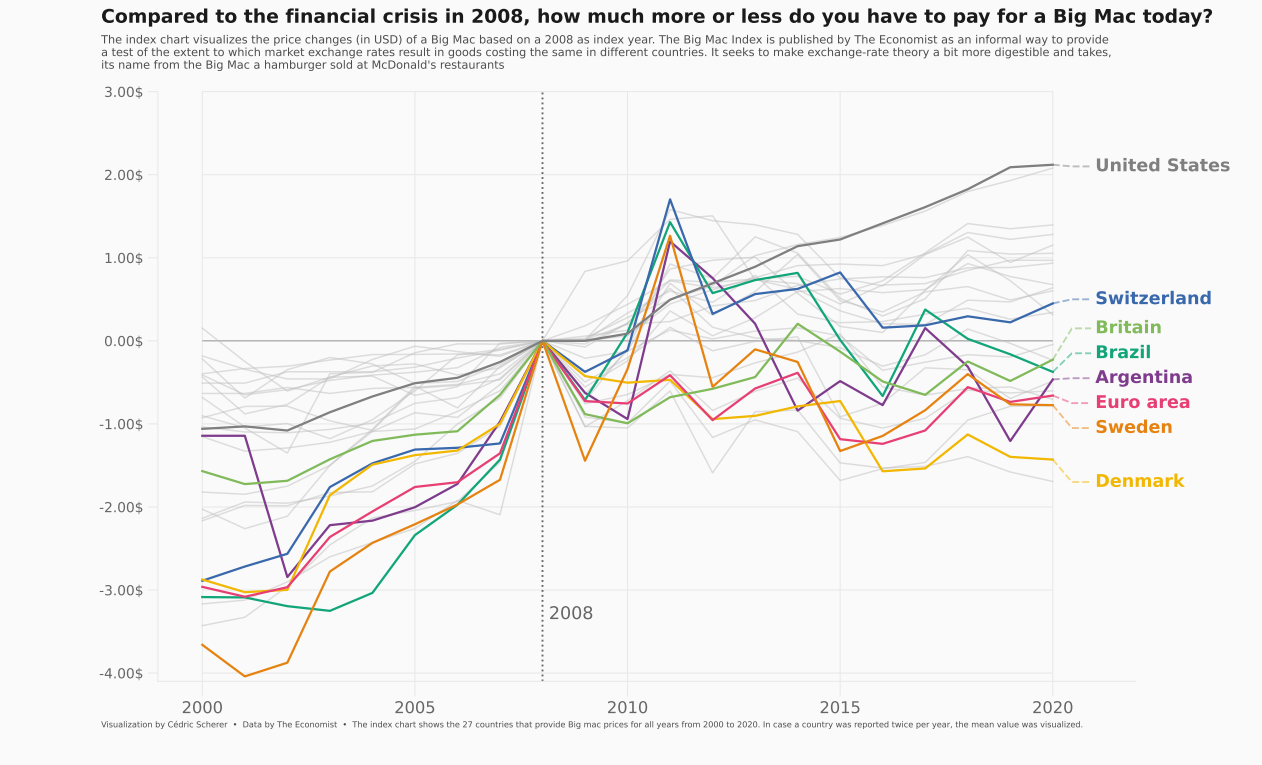

17.2.10 Lolllipop 2 Groups

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D10_Lolllipop2Groups.py, and the XML code in the file D10_Lolllipop2Groups.2D.xml.

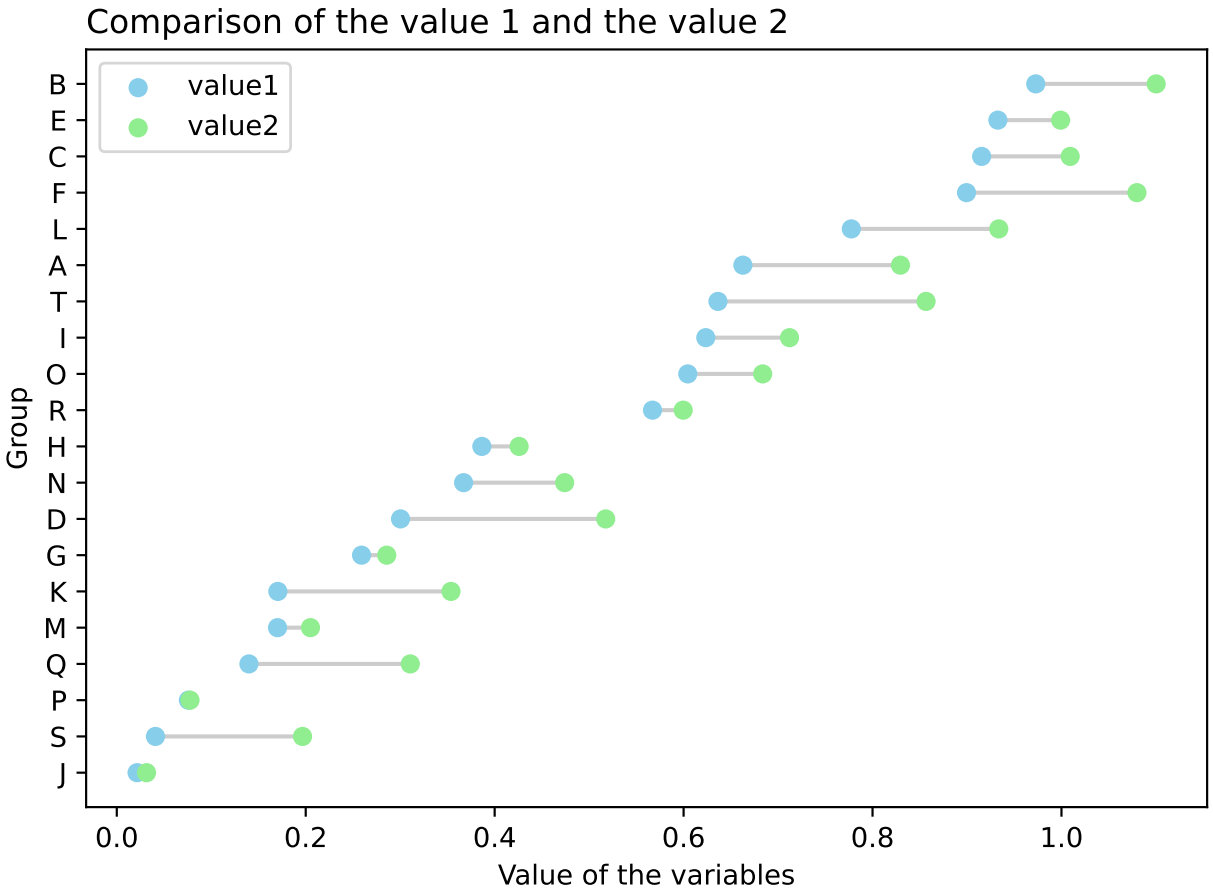

17.2.11 Highlight Group In Lollipop

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D11_HighlightGroupInLollipop.py, and the XML code in the file D11_HighlightGroupInLollipop.2D.xml.

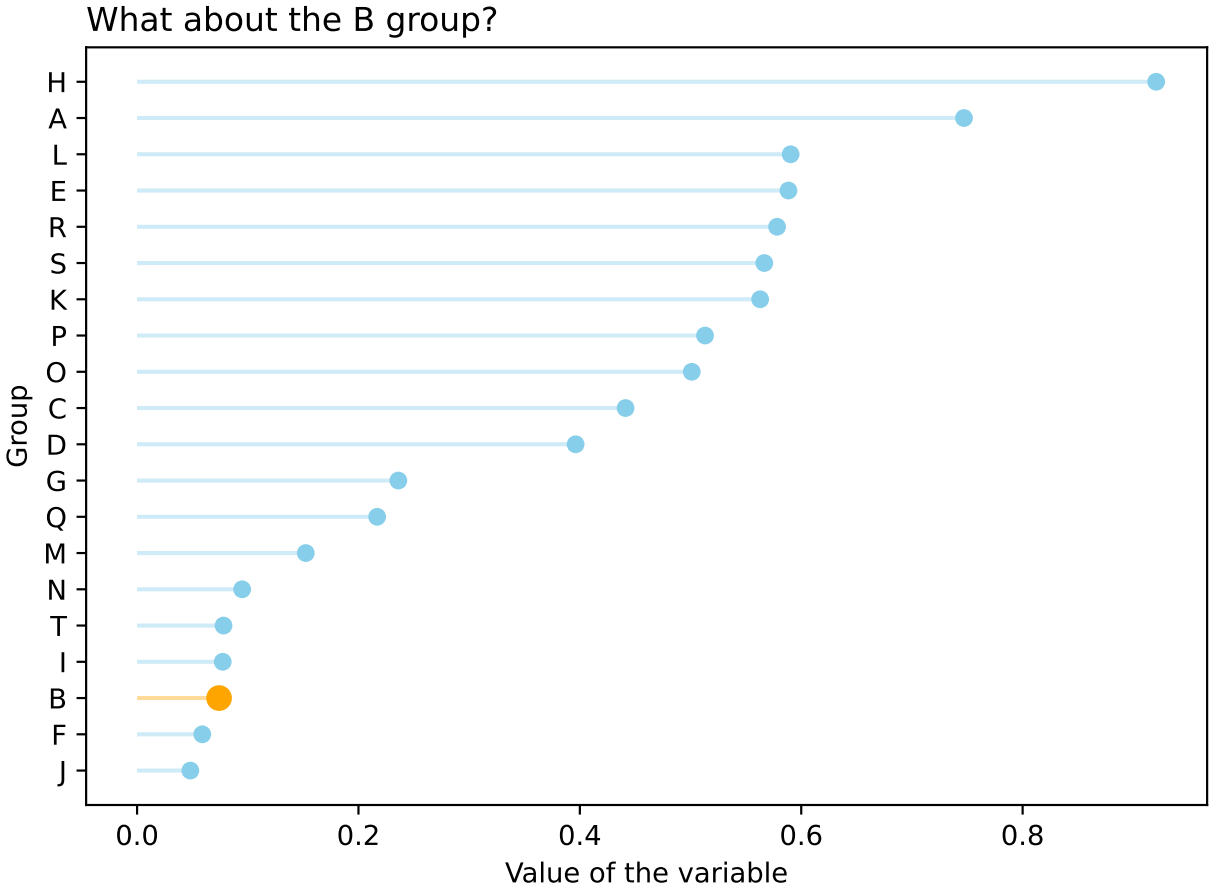

17.2.12 Lolllipop Conditional Color

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D12_LolllipopConditionalColor.py, and the XML code in the file D12_LolllipopConditionalColor.2D.xml.

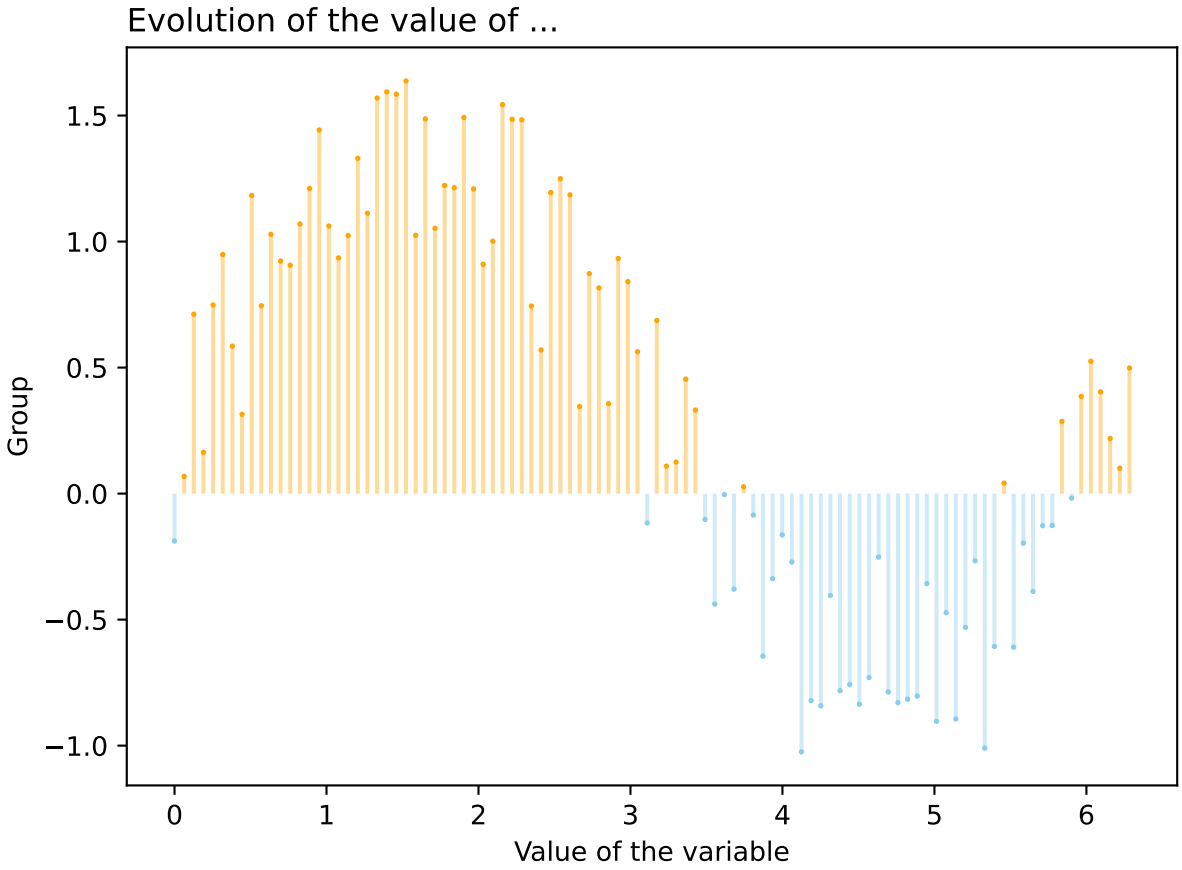

17.2.13 Lollipop chart with fancy formatting

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D13_LollipopFancyFormatting.py, and the XML code in the file D13_LollipopFancyFormatting.2D.xml.

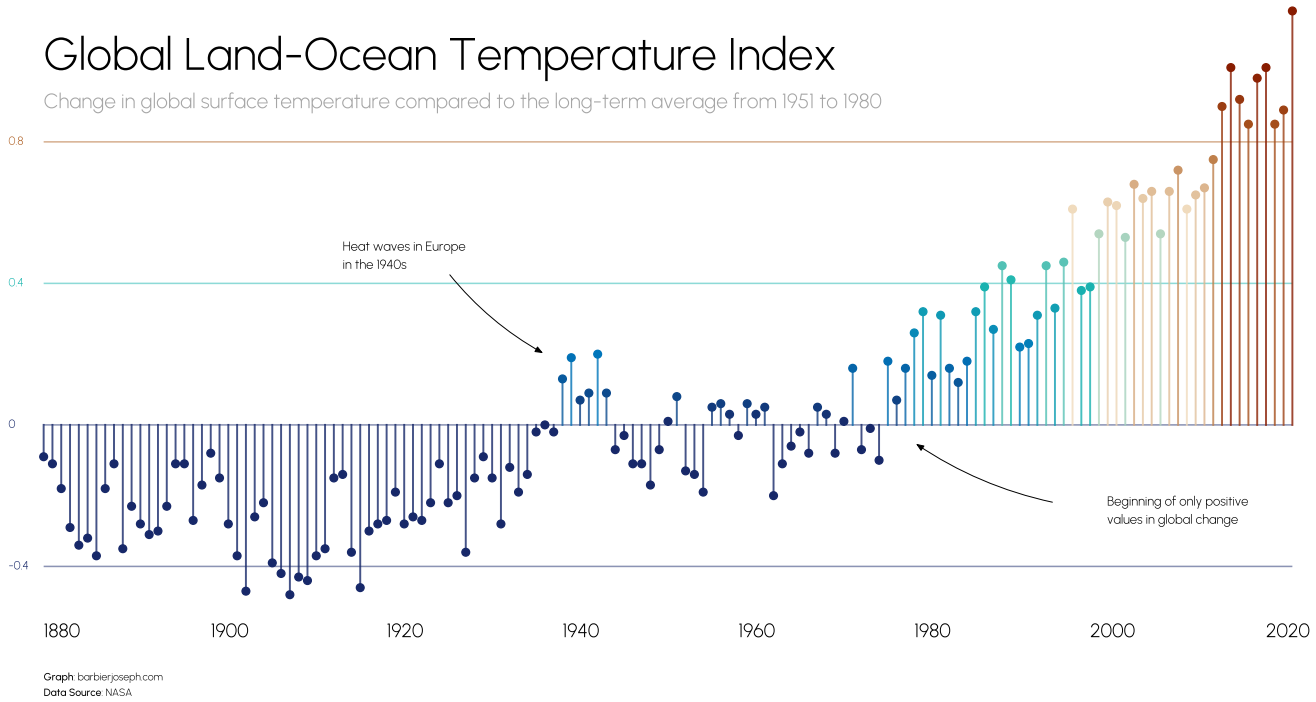

17.2.14 Circular Lolllipop

The Python code for the first example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D14a_CircularLolllipop1.py, and the XML code in the file D14a_CircularLolllipop1.2D.xml.

The Python code for the second example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D14b_CircularLolllipop2.py, and the XML code in the file D14b_CircularLolllipop2.2D.xml.

The Python code for the third example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D14b_CircularLolllipop3.py, and the XML code in the file D14c_CircularLolllipop3.2D.xml.

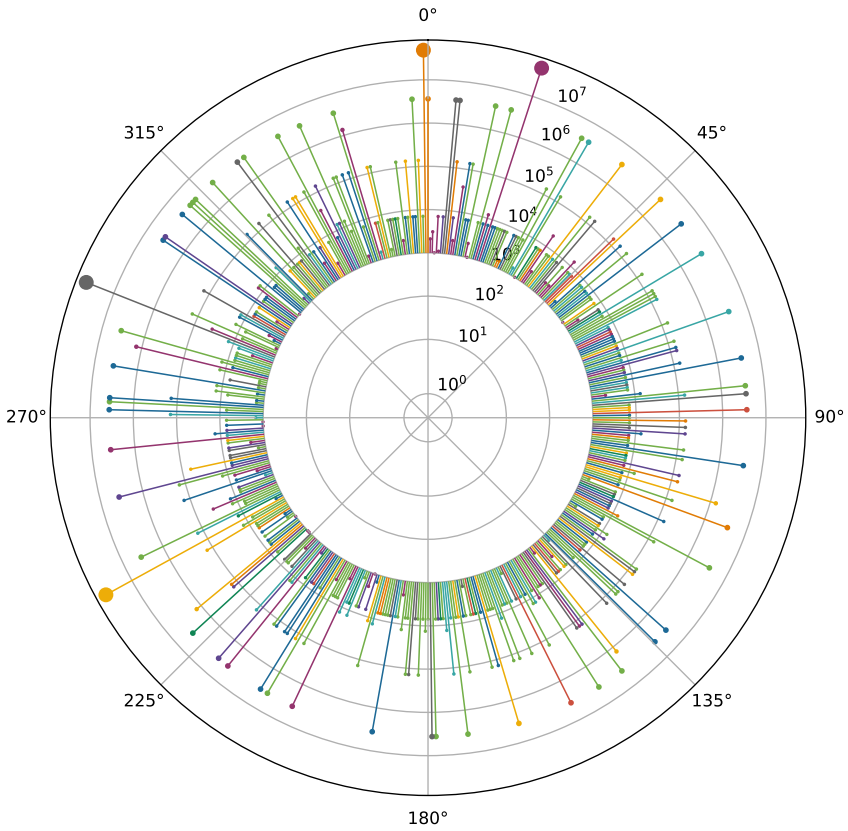

Some text

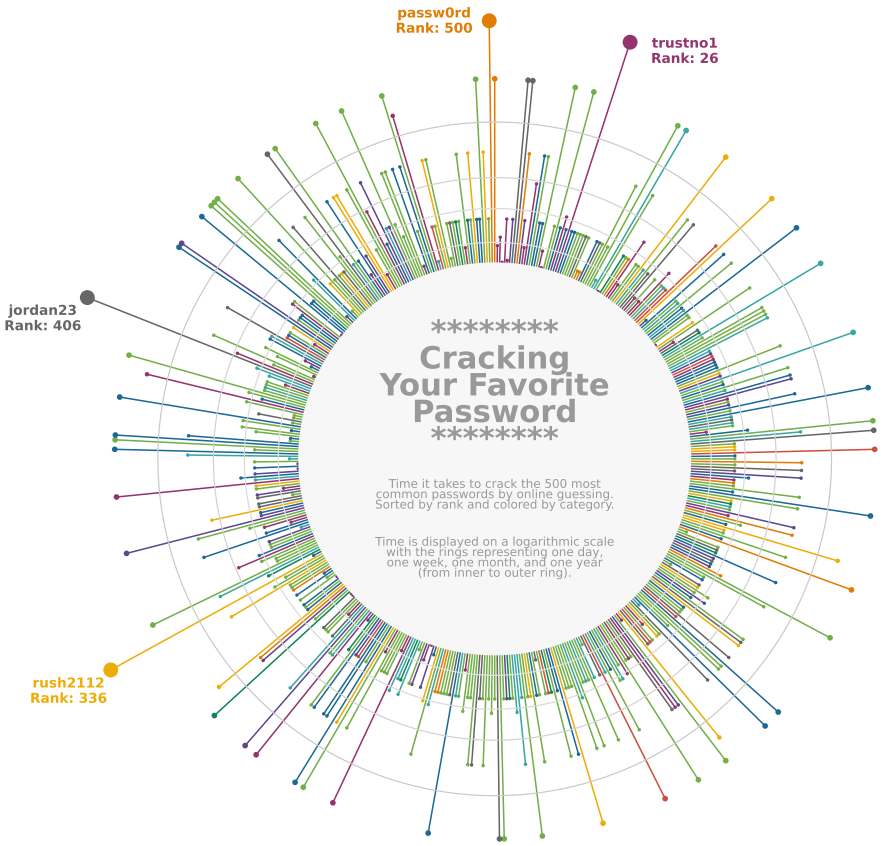

Some text

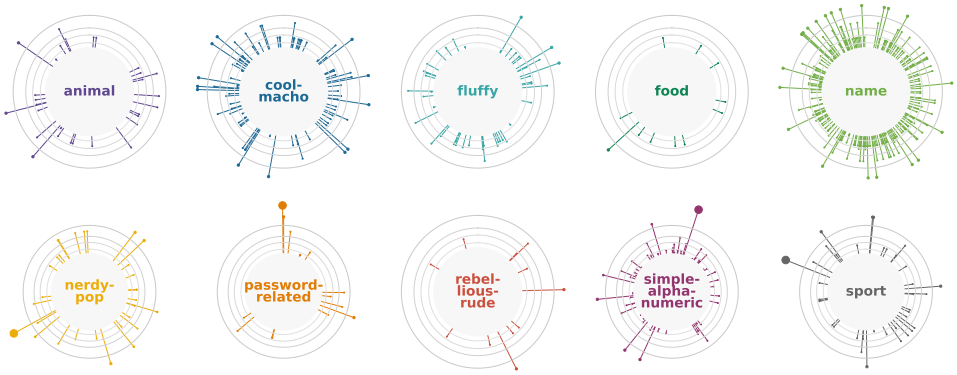

Some text

17.3 Area Plots

17.3.1 Percentage Stacked Area Chart

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_PercentageStackedAreaChart.py, and the XML code in the file D01_PercentageStackedAreaChart.2D.xml.

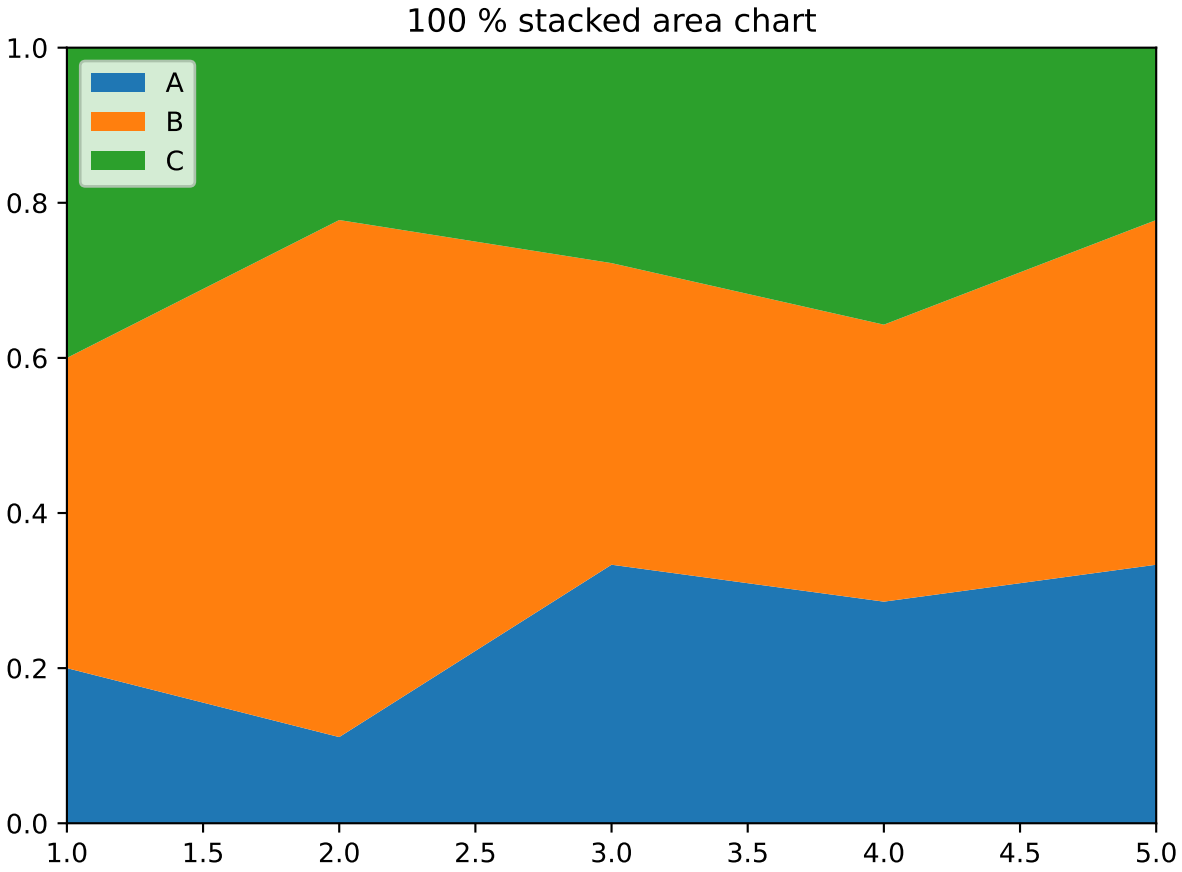

17.3.2 StackedAreaChart1

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02a_StackedAreaChart1.py, and the XML code in the file D02a_StackedAreaChart1.2D.xml.

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02b_StackedAreaChart2.py, and the XML code in the file D02b_StackedAreaChart2.2D.xml.

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02c_StackedAreaChart3.py, and the XML code in the file D02c_StackedAreaChart3.2D.xml.

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02d_StackedAreaChart4.py, and the XML code in the file D02d_StackedAreaChart4.2D.xml.

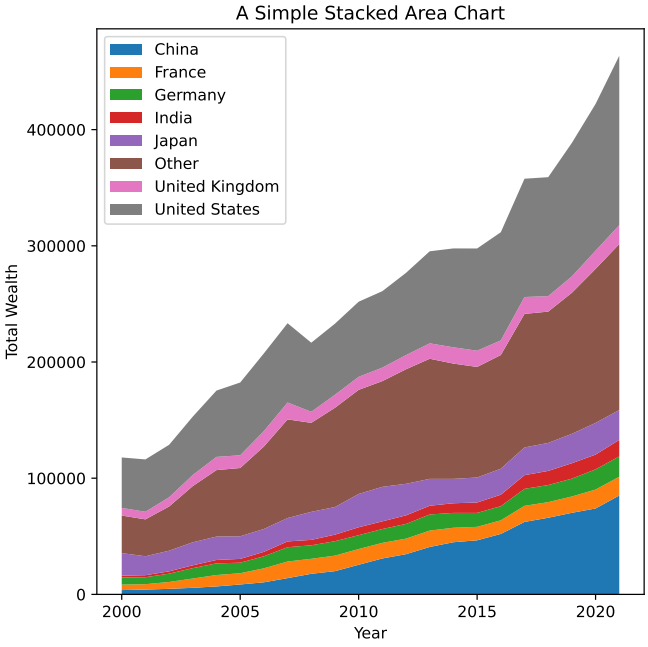

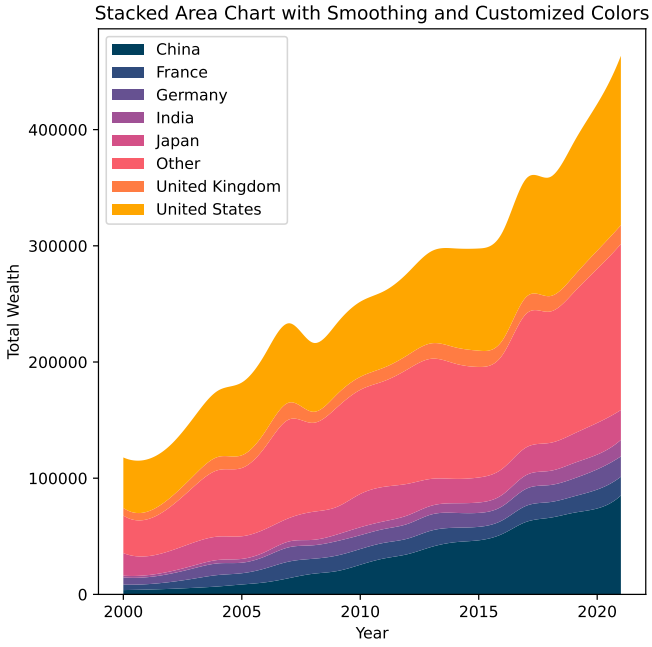

Some text

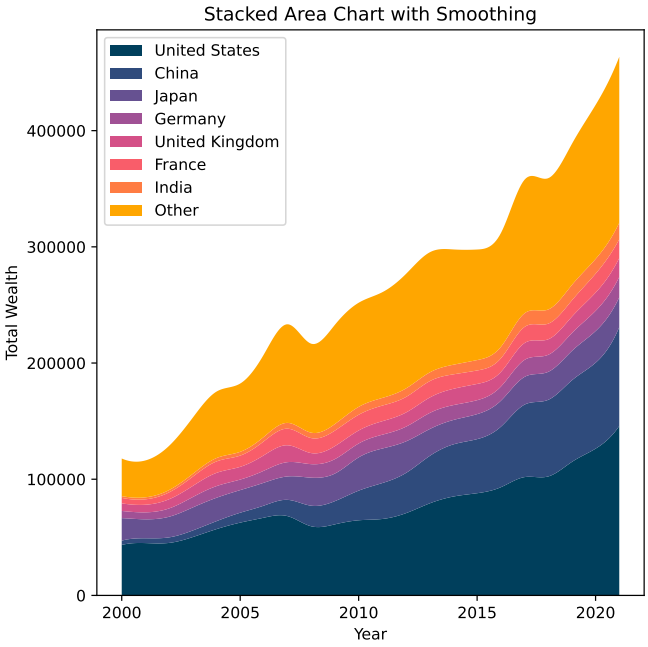
Stacked Area Chart with Smoothing
United States
China
Japan
Germany
United Kingdom
France
India
Other
Total Wealth
0
100000
200000
300000
400000
2000
2005
2010
2015
2020
Year

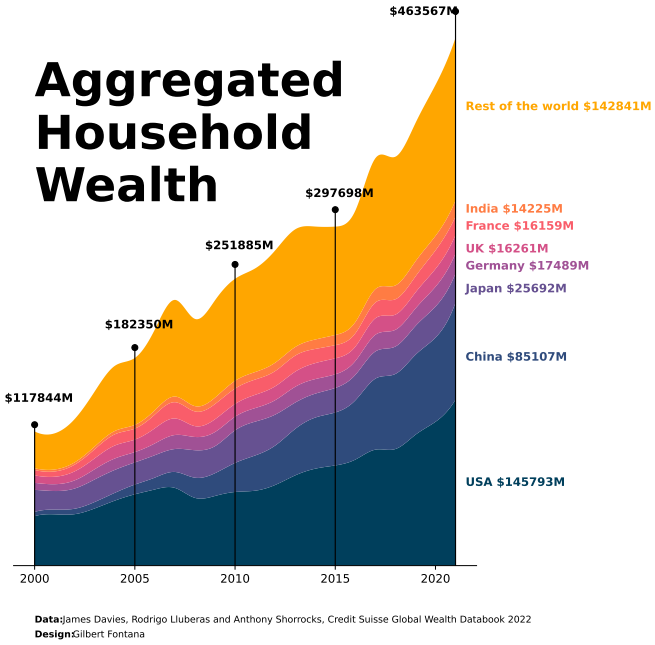
Aggregated Household Wealth
$463567M
$297698M
$251885M
$182350M
$117844M
Rest of the world $142841M
India $14225M
France $16159M
UK $16261M
Germany $17489M
Japan $25692M
China $85107M
USA $145793M
2000
2005
2010
2015
2020
Data: James Davies, Rodrigo Lluberas and Anthony Shorrocks, Credit Suisse Global Wealth Databook 2022
Design: Gilbert Fontana

17.3.3 Steam graph

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03a_Steamgraph1.py, and the XML code in the file D03a_Steamgraph1.2D.xml.

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03b_Steamgraph2.py, and the XML code in the file D03b_Steamgraph2.2D.xml.

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03c_Steamgraph3.py, and the XML code in the file D03c_Steamgraph3.2D.xml.

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03d_Steamgraph4.py, and the XML code in the file D03d_Steamgraph4.2D.xml.

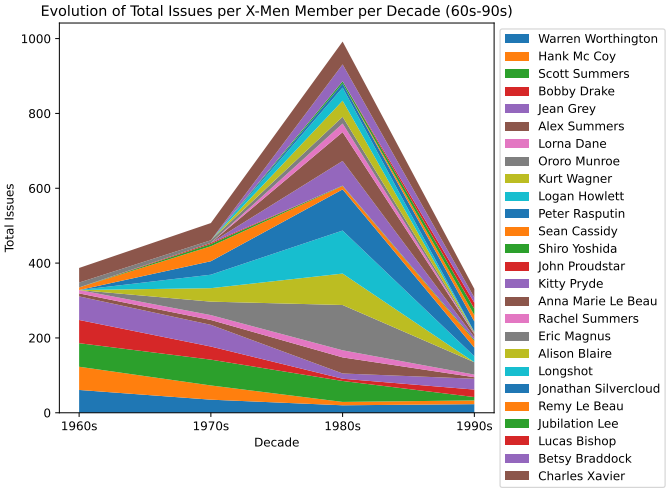

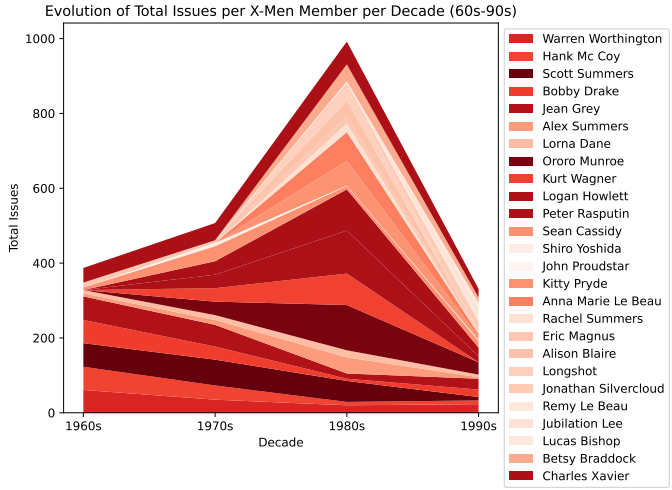

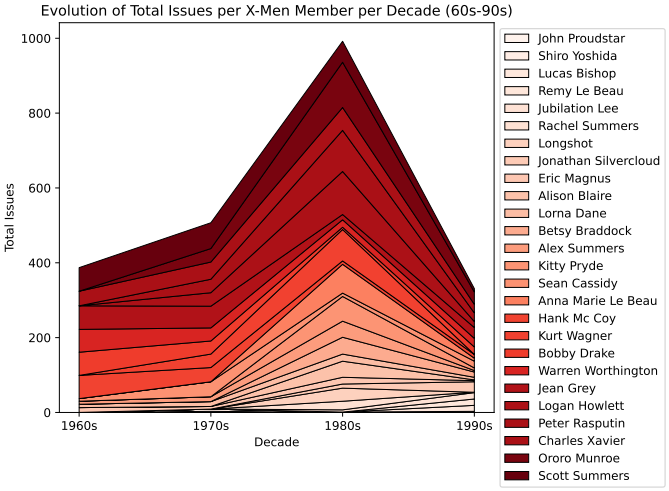

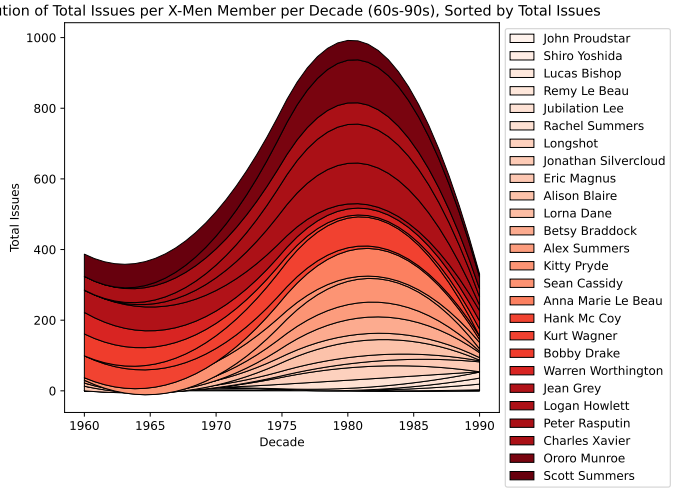

17.3.4 Area Chart

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04_MultipleAreaCharts.py, and the XML code in the file D04_MultipleAreaCharts.2D.xml.

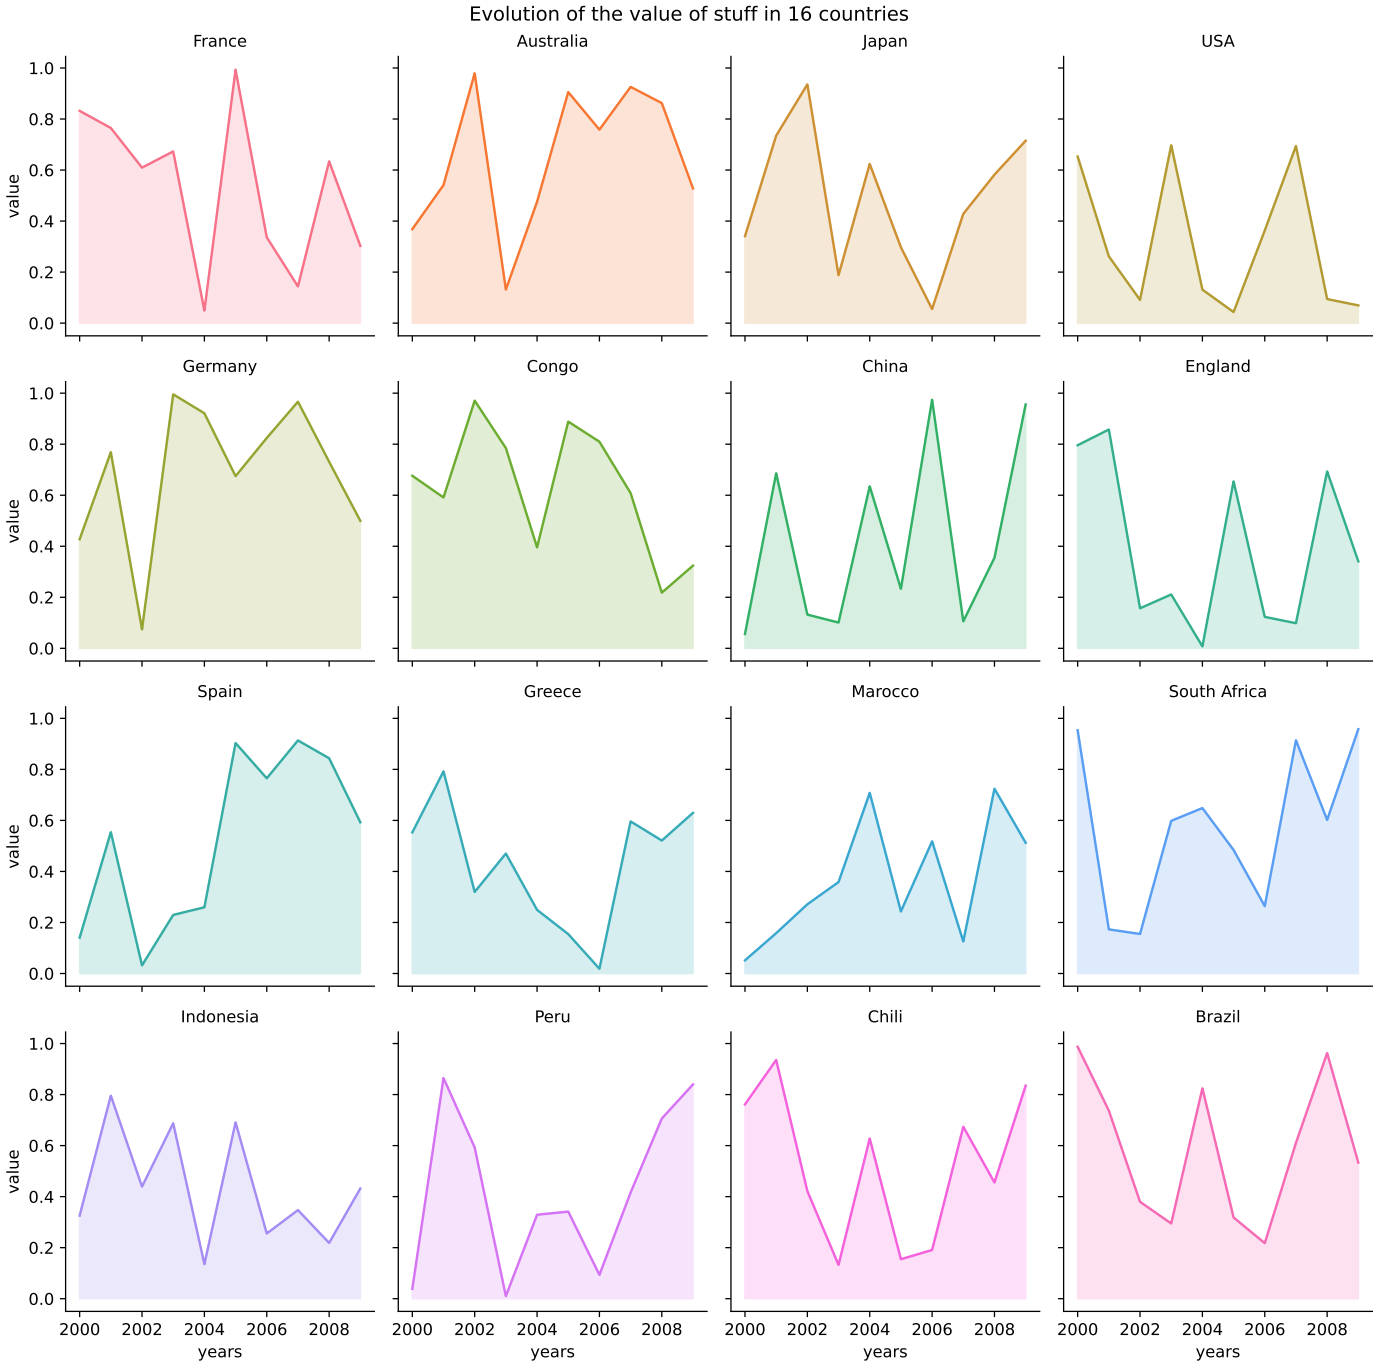

17.3.5 Density Chart

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05_DensityChart.py, and the XML code in the file D05_DensityChart.2D.xml.

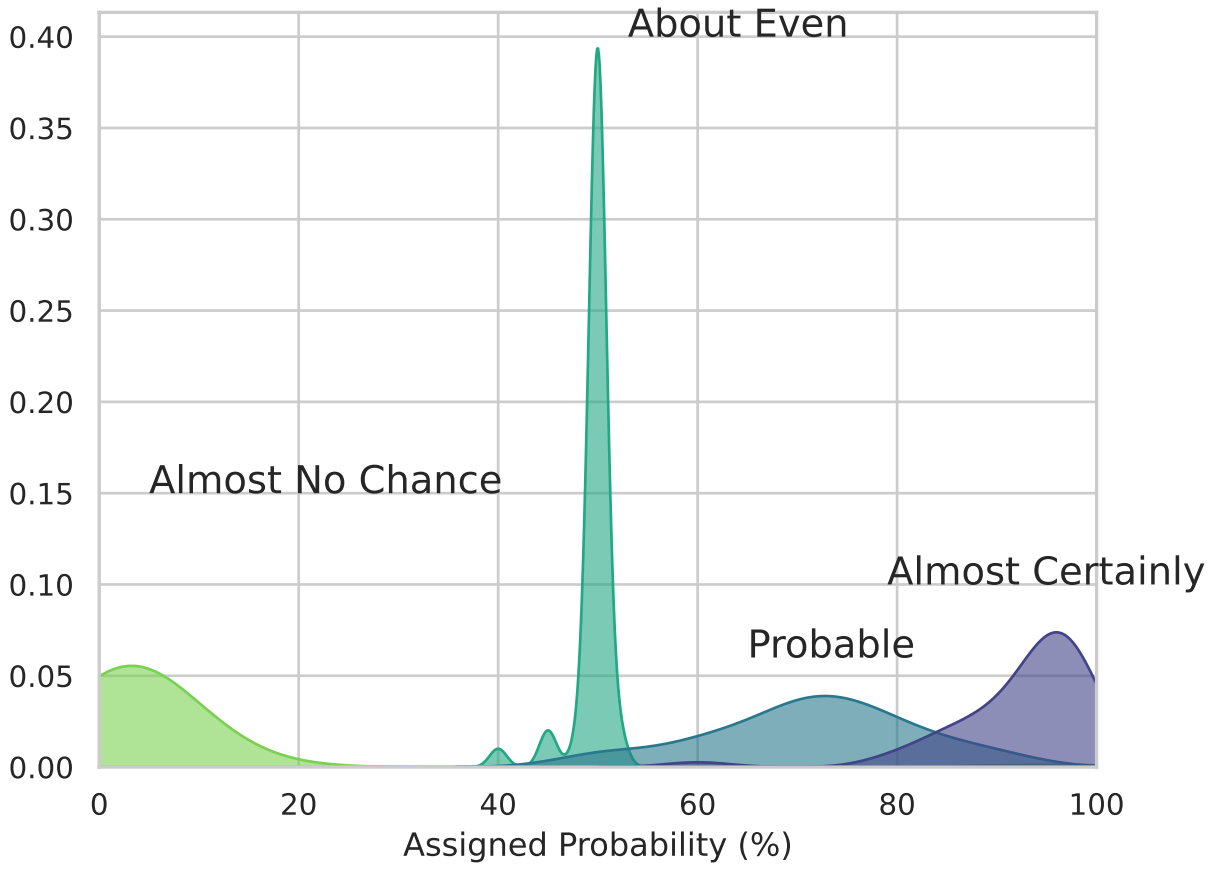

17.3.6 Ridgetline Plot

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06_RidgetlinePlot.py, and the XML code in the file D06_RidgetlinePlot.2D.xml.

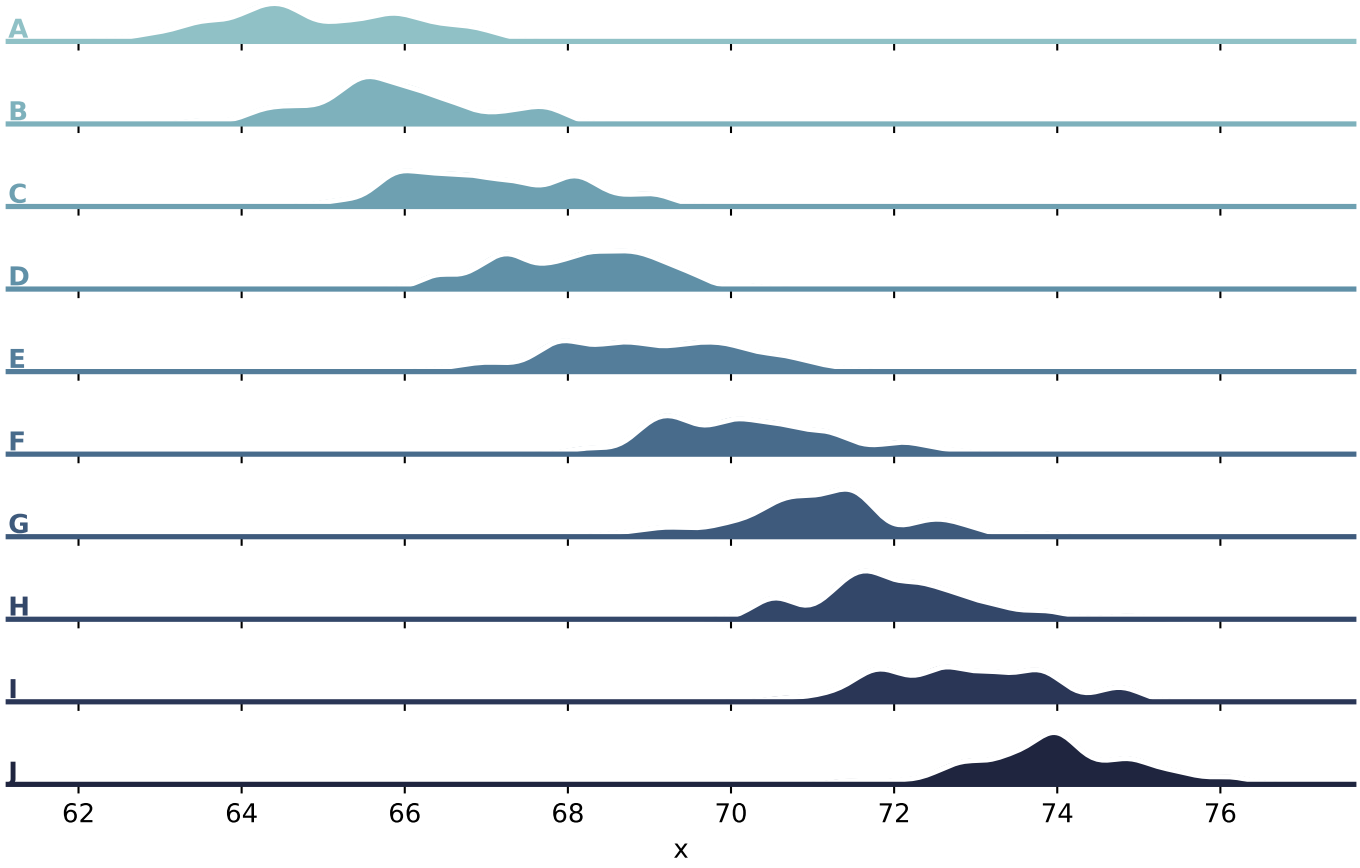

17.3.7 Kde Plot, 3 versions

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07a_KdePlot1.py, and the XML code in the file D07a_KdePlot1.2D.xml.

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07b_KdePlot2.py, and the XML code in the file D07b_KdePlot2.2D.xml.

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07c_KdePlot3.py, and the XML code in the file D07c_KdePlot3.2D.xml.

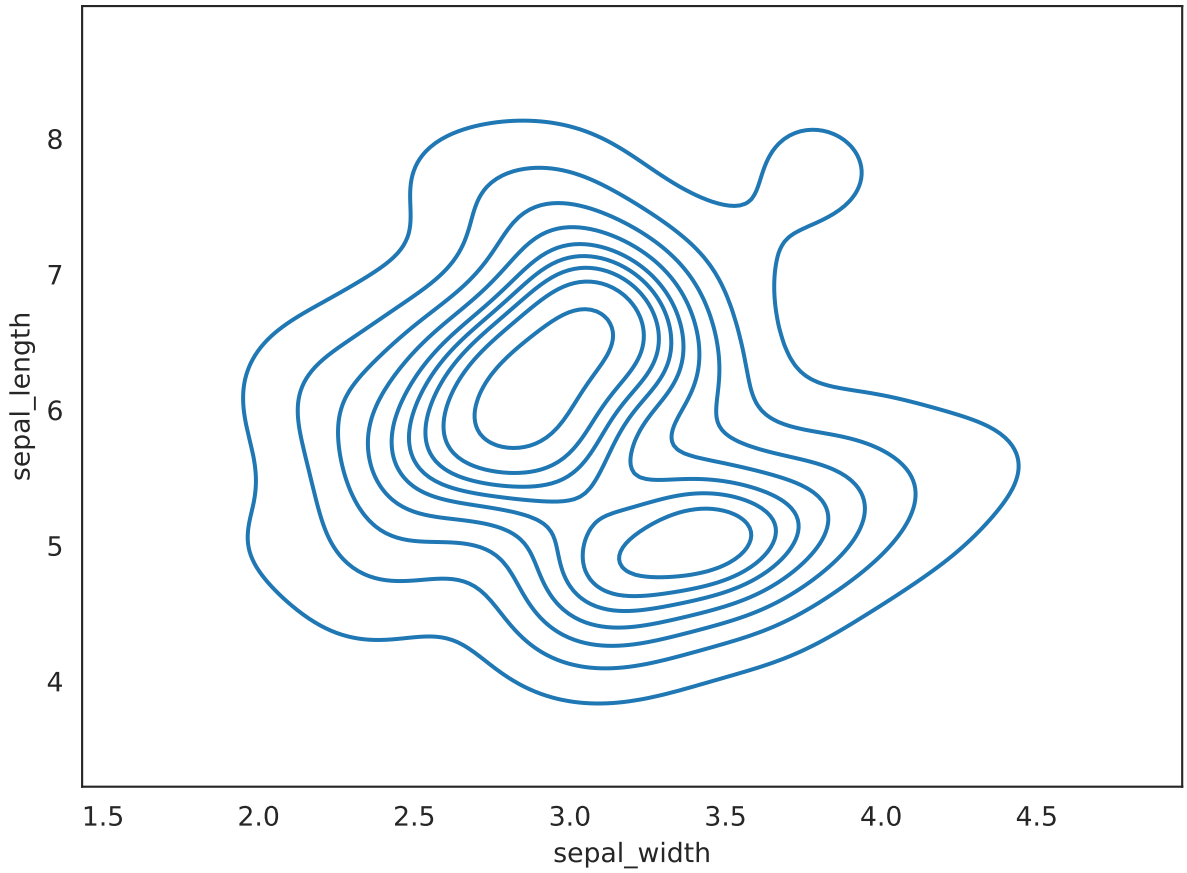

Some text

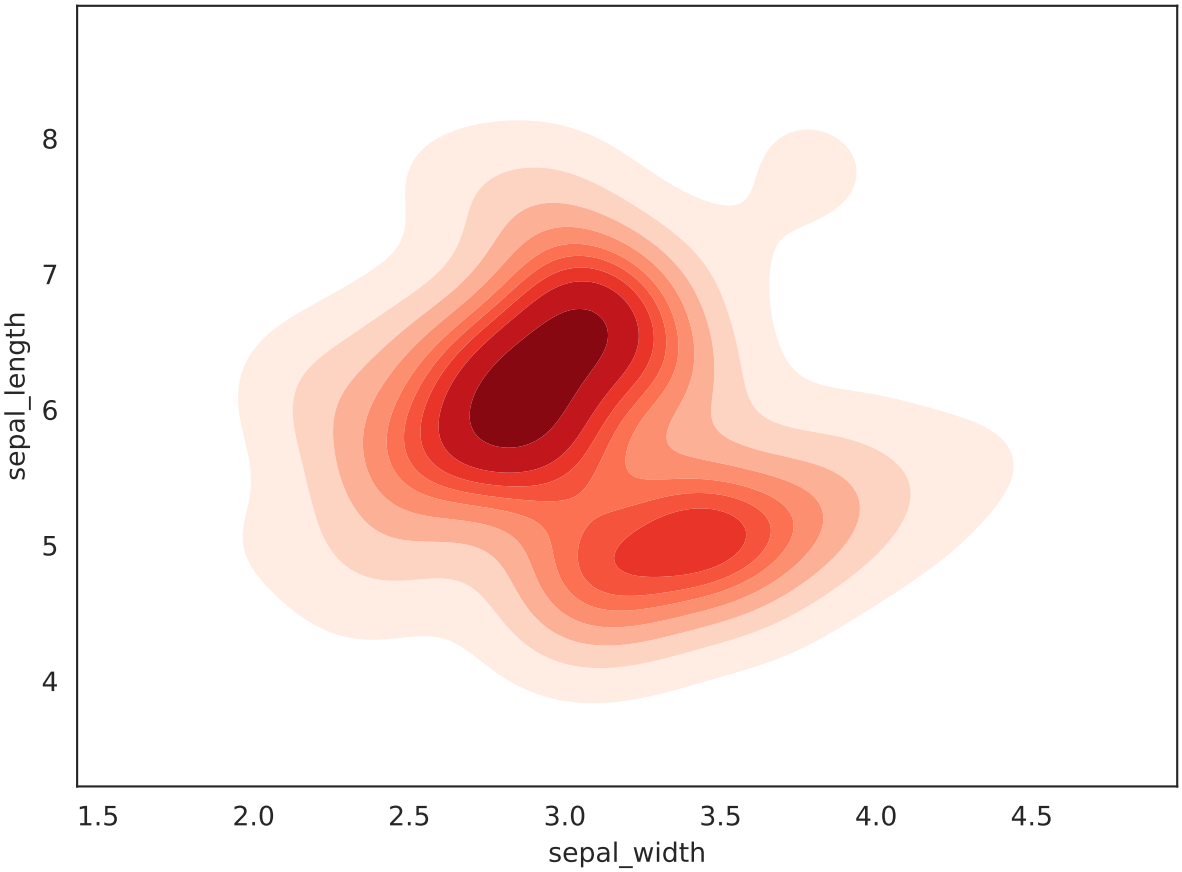

Some text

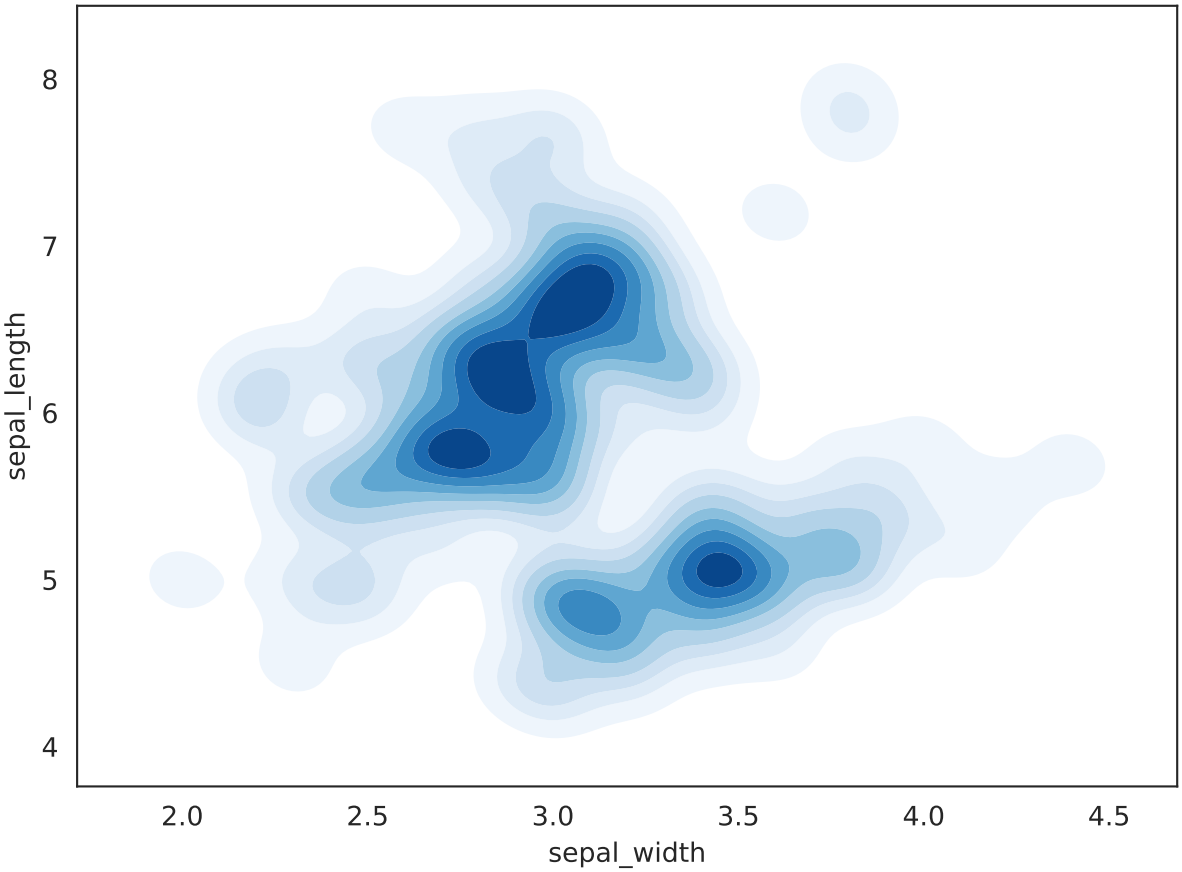

Some text

17.4 Boxplot, Violinplot and Raincloud plot

17.4.1 Boxplot, simple

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_BoxplotSimple.py, and the XML code in the file D01_BoxplotSimple.2D.xml.

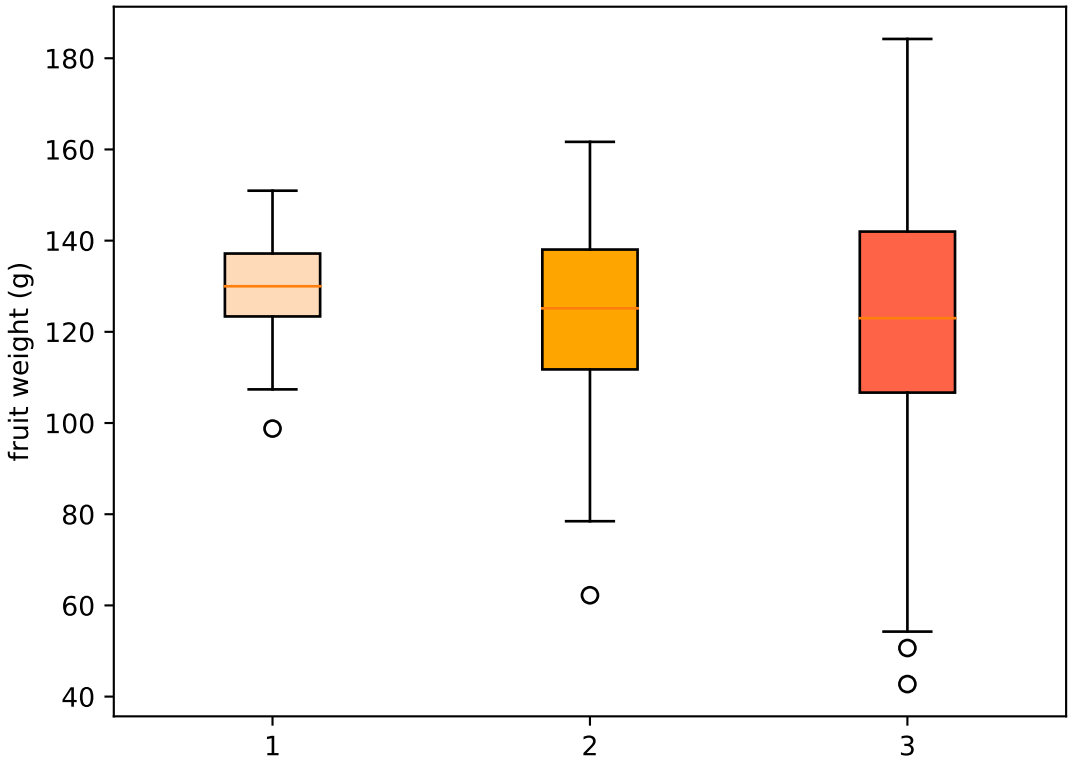

17.4.2 Boxplot, multiple groups

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02_BoxplotMultipleGroups.py, and the XML code in the file D02_BoxplotMultipleGroups.2D.xml.

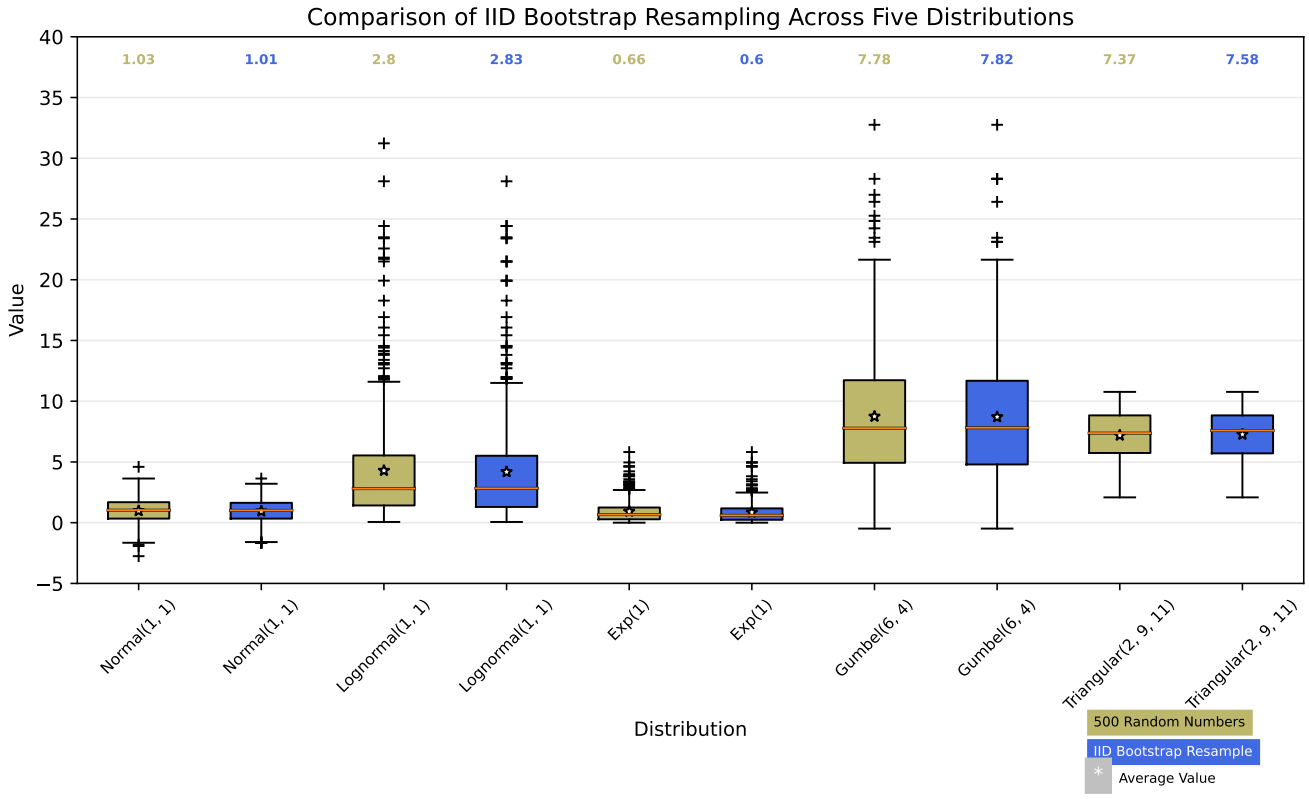

17.4.3 ViolinPlot

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03_ViolinPlot.py, and the XML code in the file D03_ViolinPlot.2D.xml.

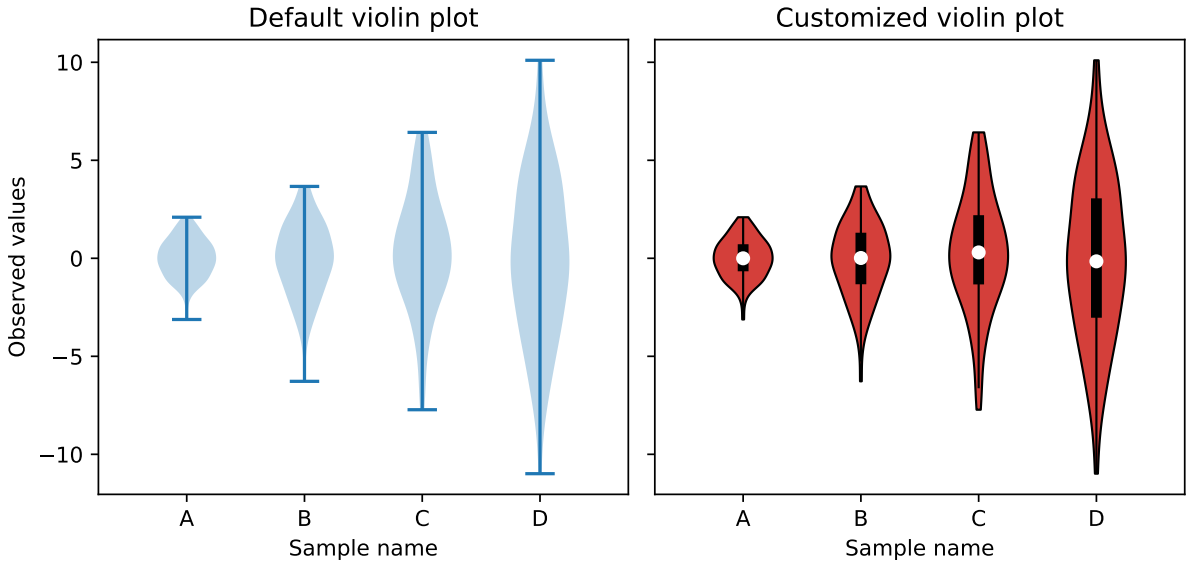

17.4.4 Boxplot vs violinplot

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04_BoxplotVsViolinplot.py, and the XML code in the file D04_BoxplotVsViolinplot.2D.xml.

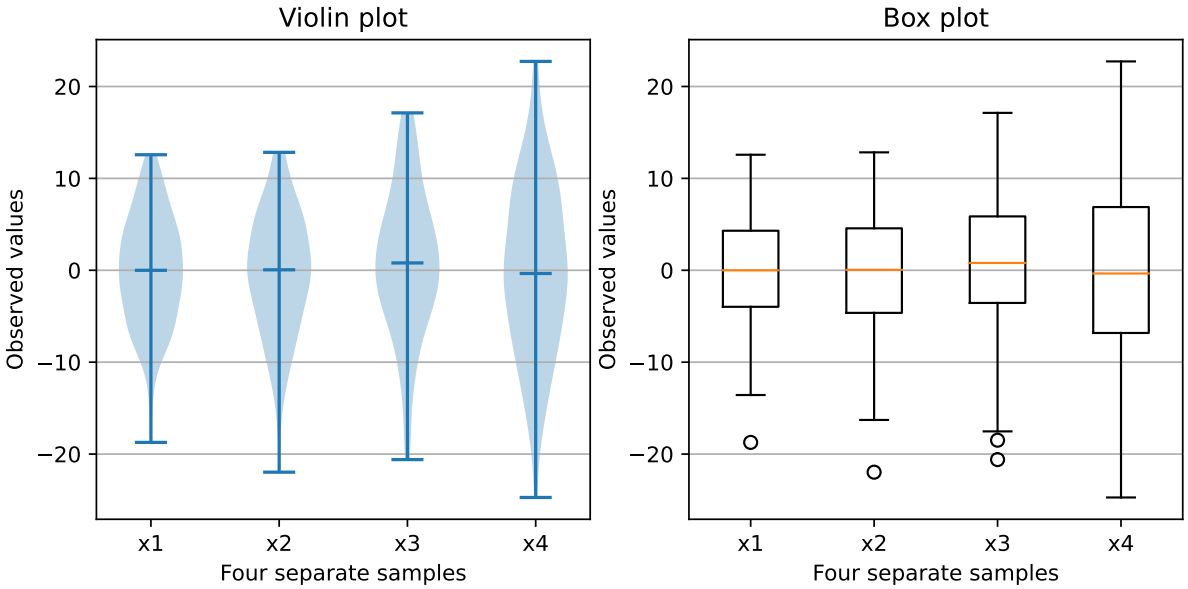

Some text

17.4.5 Boxenplot

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05_Boxenplot.py, and the XML code in the file D05_Boxenplot.2D.xml.

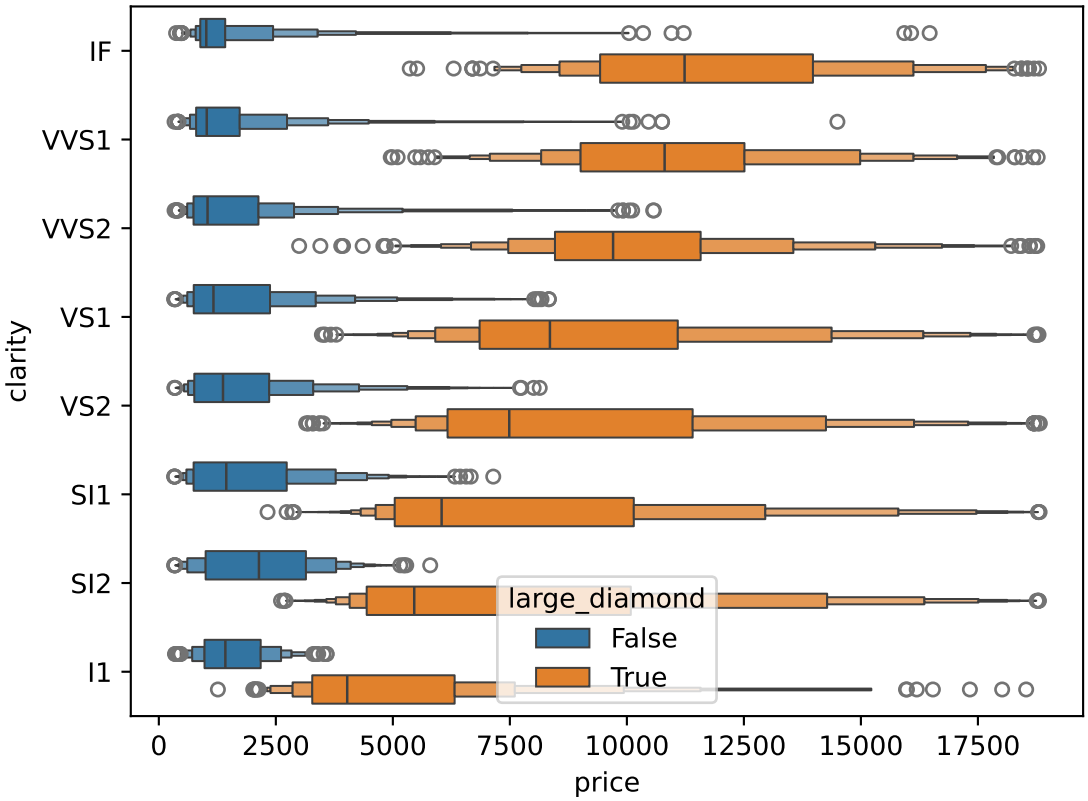

Some text

17.4.6 Swarmplot

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06_Swarmplot.py, and the XML code in the file D06_Swarmplot.2D.xml.

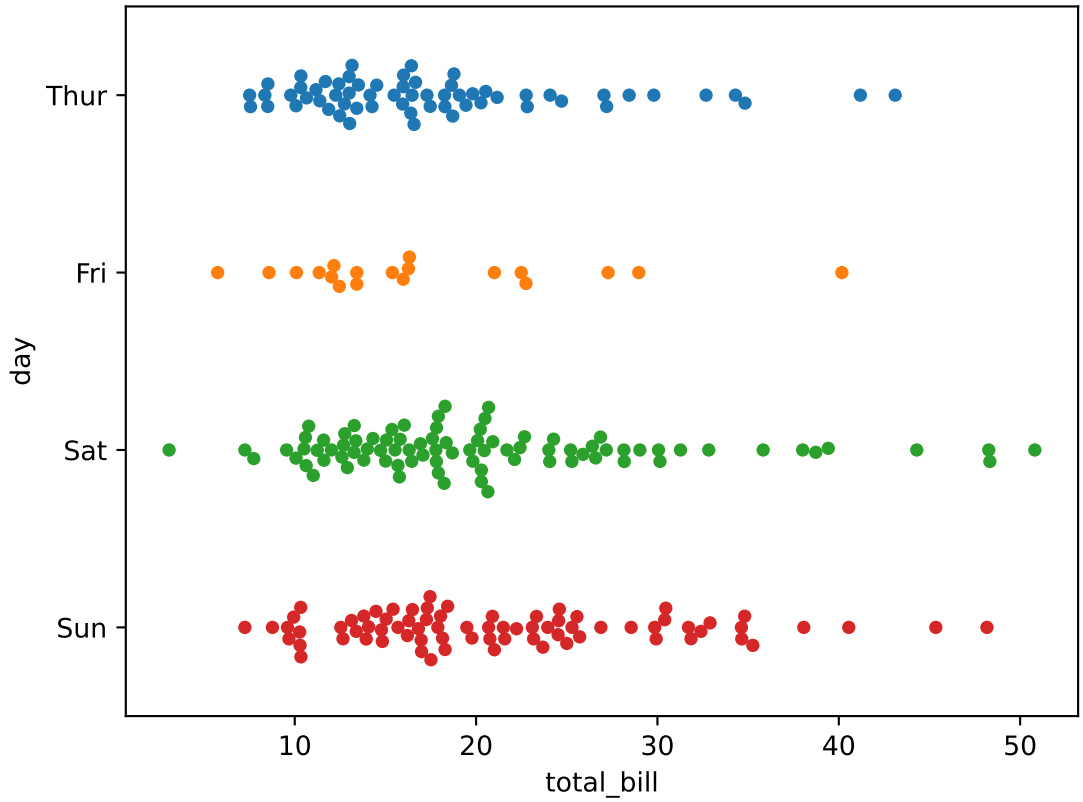

Some text

17.4.7 Stripplot

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07_Stripplot.py, and the XML code in the file D07_Stripplot.2D.xml.

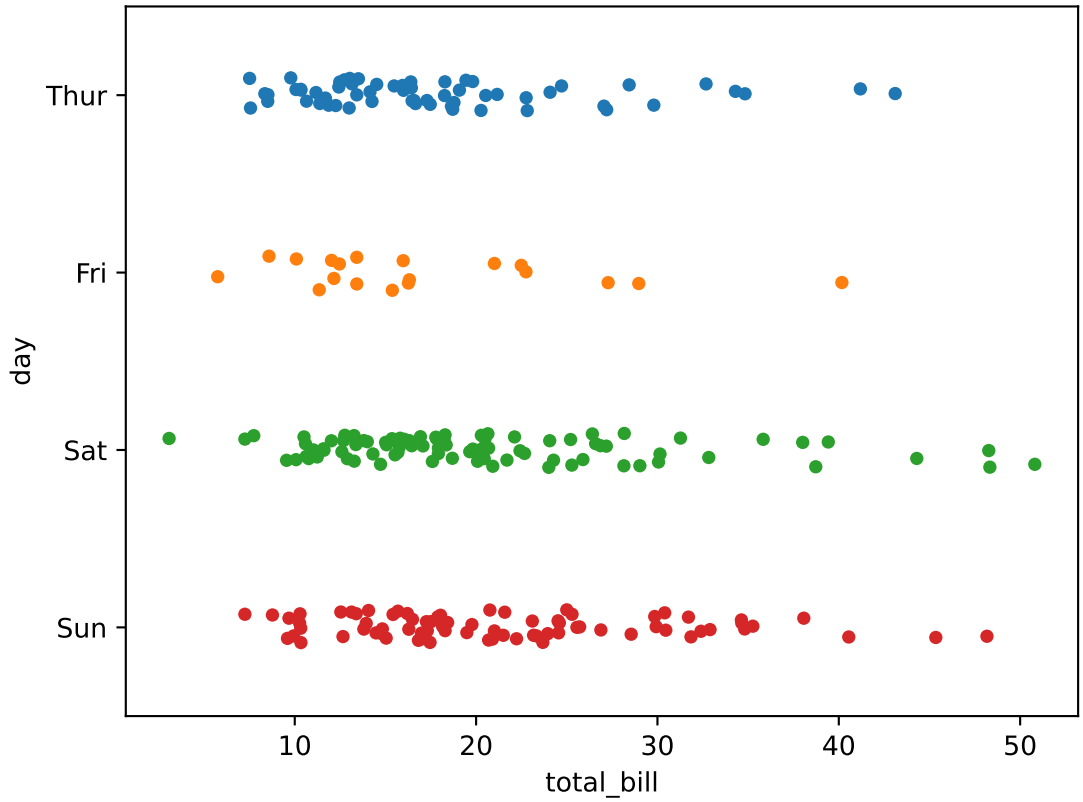

Some text

17.4.8 Catplot

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D08_Catplot.py, and the XML code in the file D08_Catplot.2D.xml.

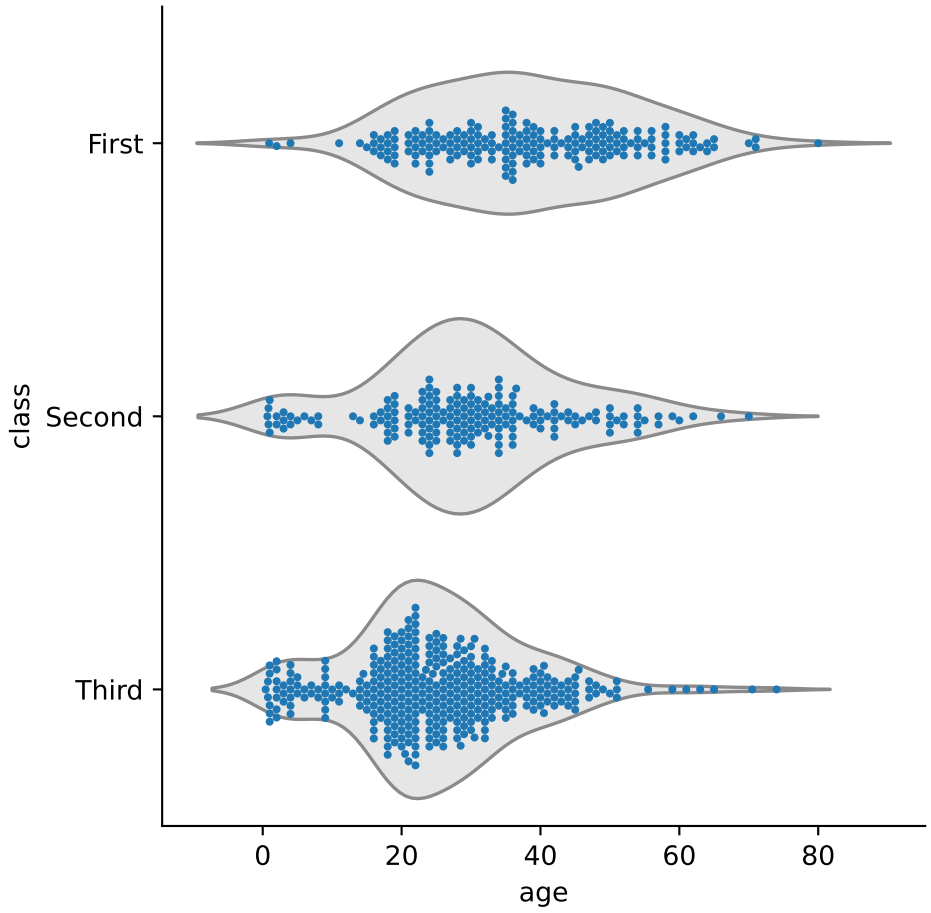

Some text

17.4.9 Raincloud Plot

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D09_RaincloudPlot.py, and the XML code in the file D09_RaincloudPlot.2D.xml.

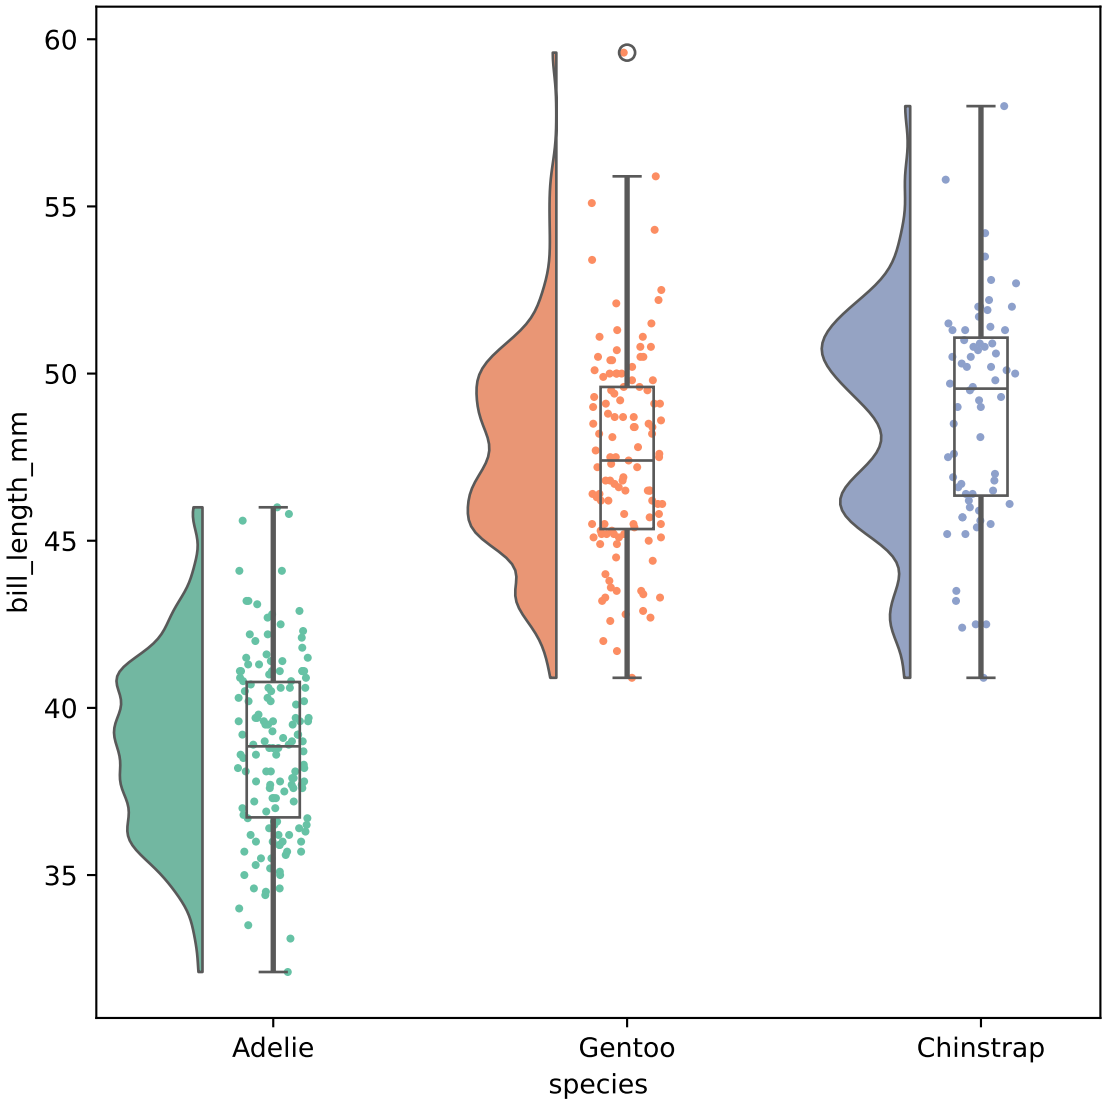

17.5 Correlation and regression

17.5.1 Linear regression with confidence Band

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_LinRegWithConfidenceBand.py, and the XML code in the file D01_LinRegWithConfidenceBand.2D.xml.

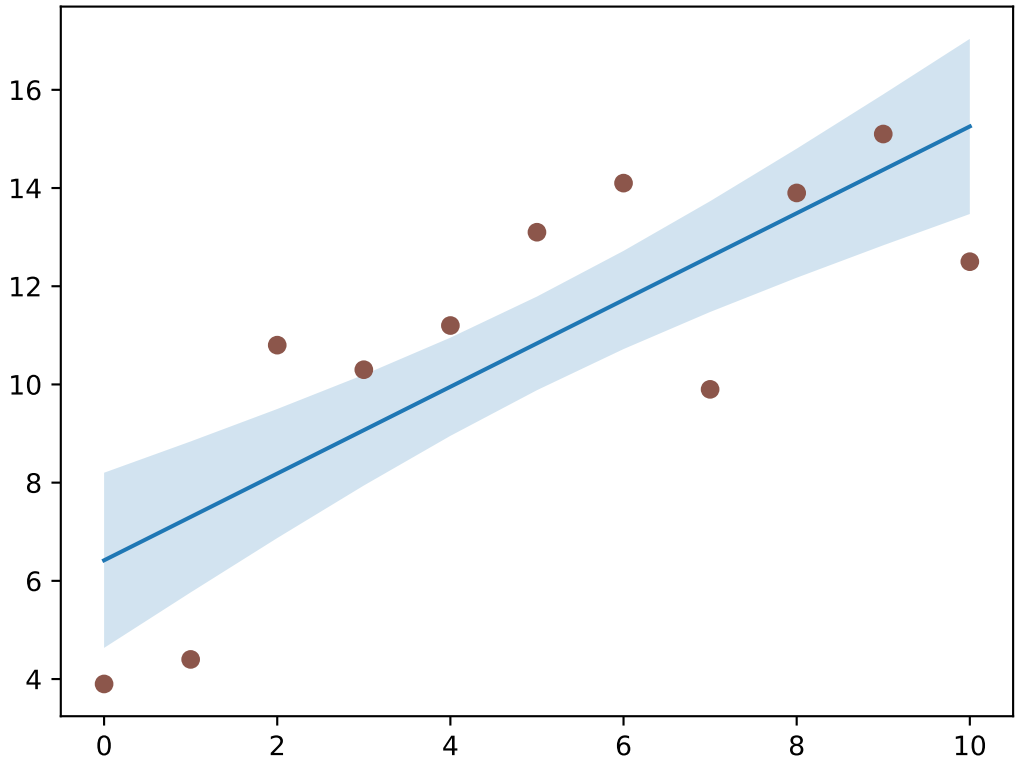

17.5.2 Anscombe example

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02_AnscombeExample.py, and the XML code in the file D02_AnscombeExample.2D.xml.

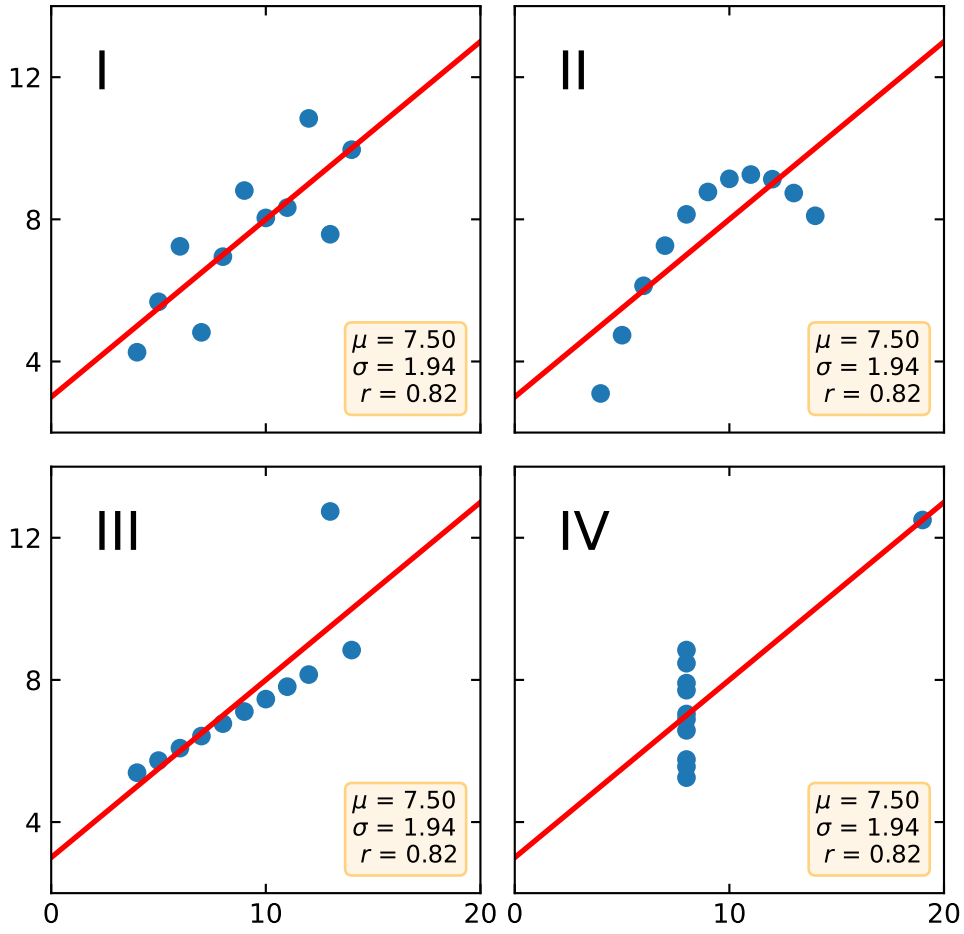

17.5.3 Faceted Scatter Plots: all in one plot

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03_FacetedScatterPlot1.py, and the XML code in the file D03_FacetedScatterPlot1.2D.xml.

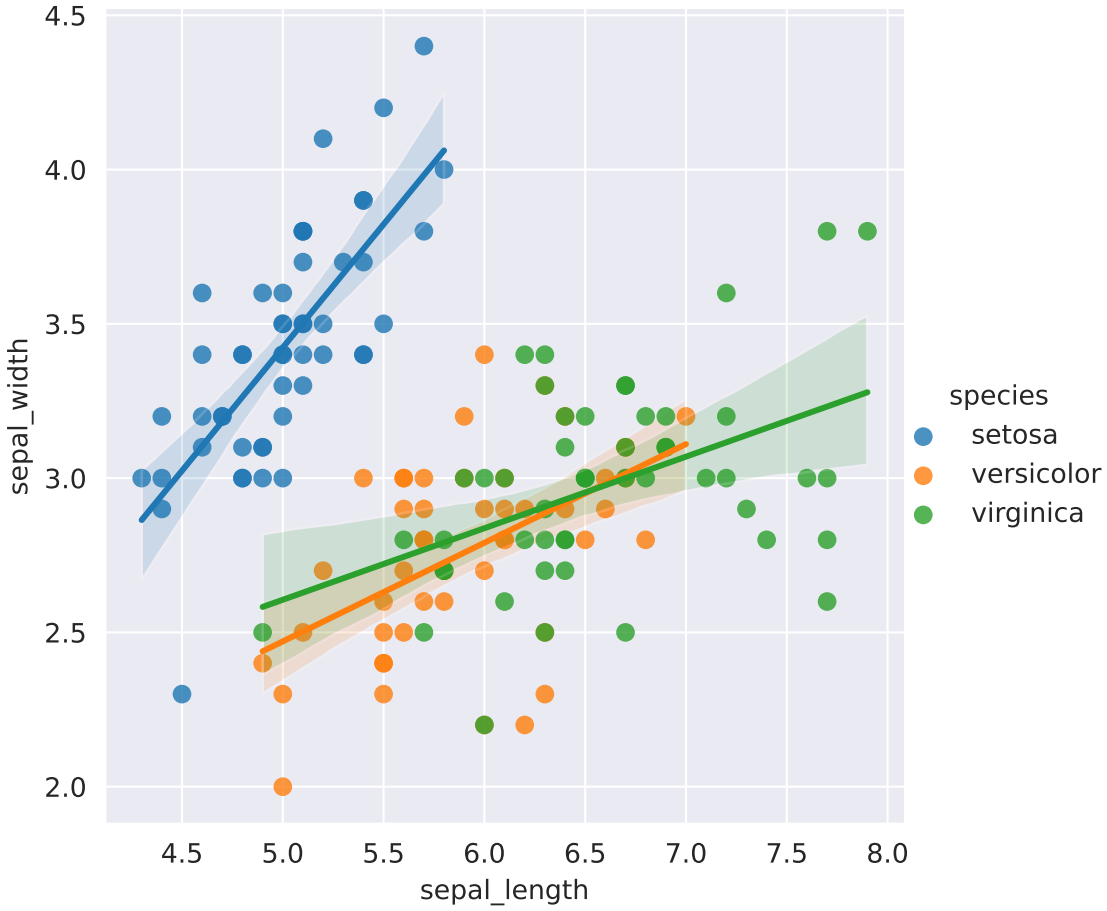

Some text

17.5.4 Faceted Scatter Plots: separate plots

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04_FacetedScatterPlot2.py, and the XML code in the file D04_FacetedScatterPlot2.2D.xml.

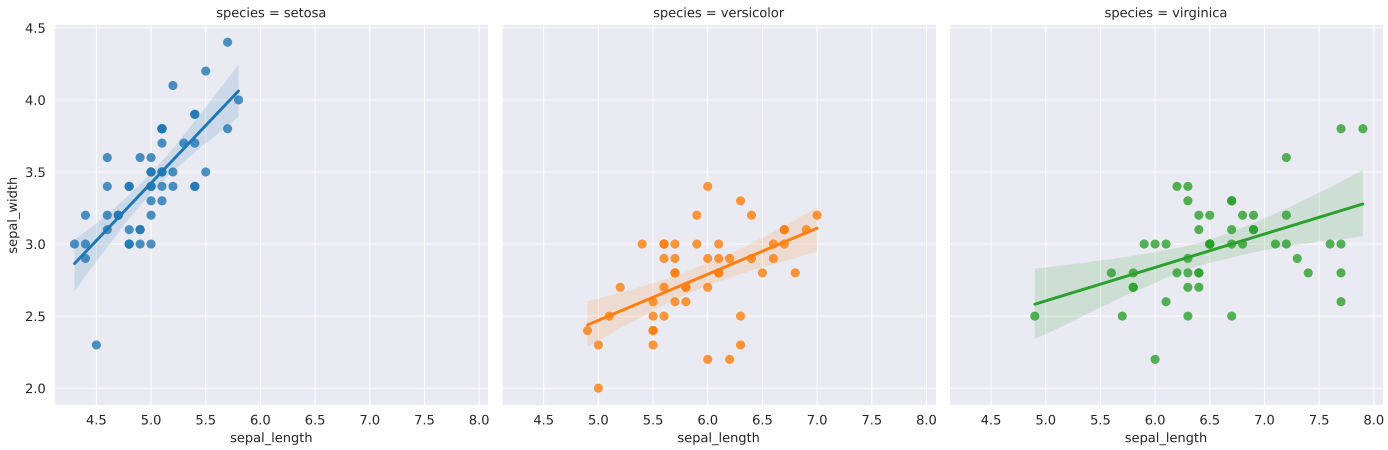

Some text

17.5.5 Faceted Scatter Plots: further subgrouping

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05_FacetedScatterPlot3.py, and the XML code in the file D05_FacetedScatterPlot3.2D.xml.

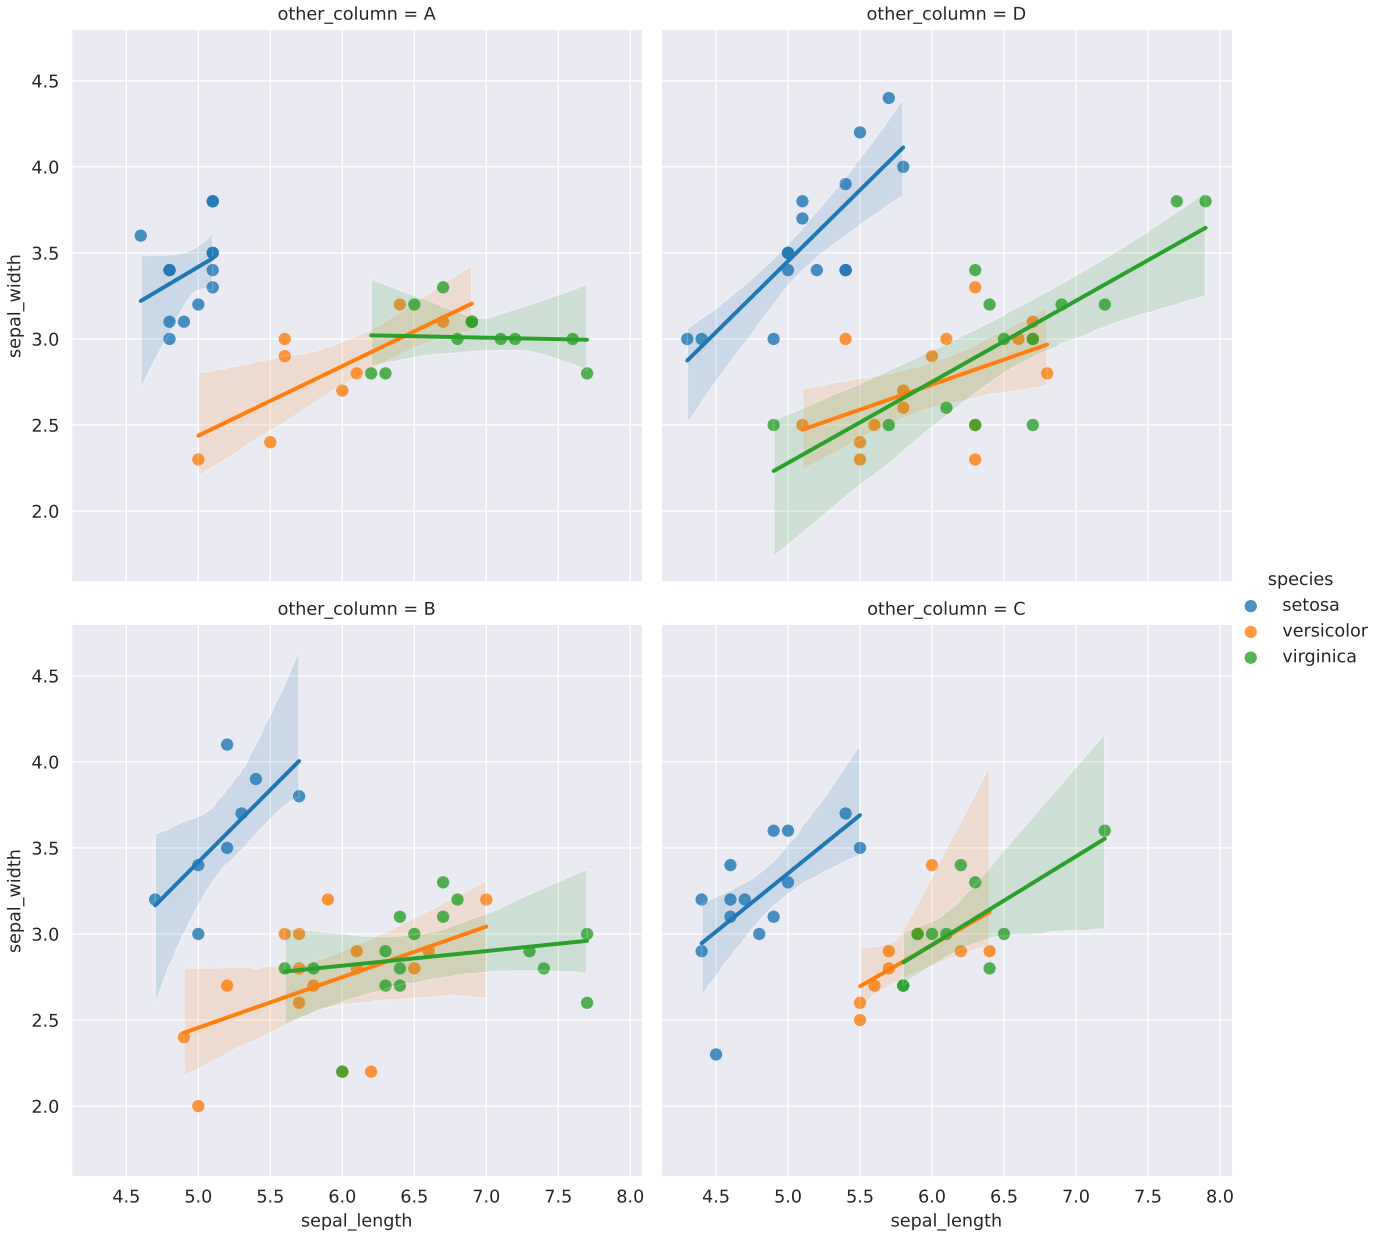

Some text

17.5.6 Bubbleplot

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06_Bubbleplot.py, and the XML code in the file D06_Bubbleplot.2D.xml.

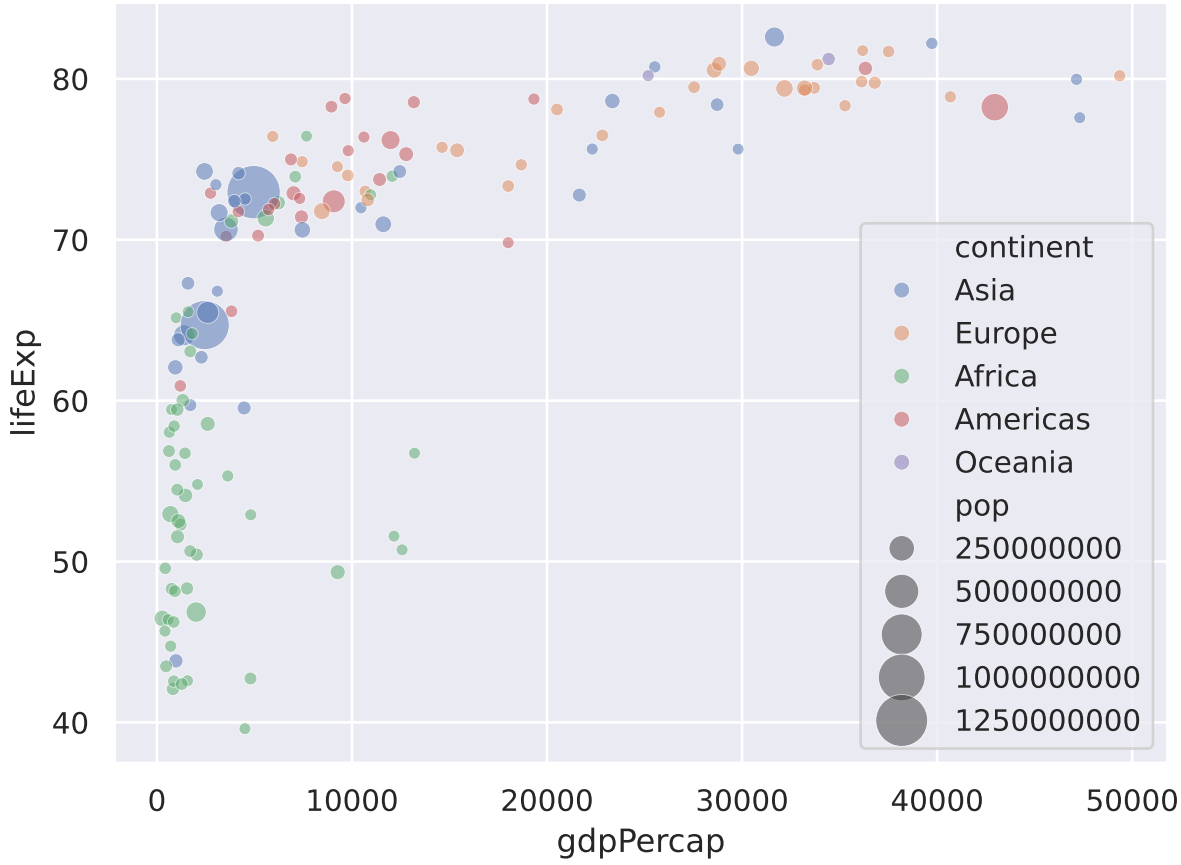

17.5.7 Scatterplot with fancy formatting

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07_ScatterplotWithFancyFomatting.py, and the XML code in the file D07_ScatterplotWithFancyFomatting.2D.xml.

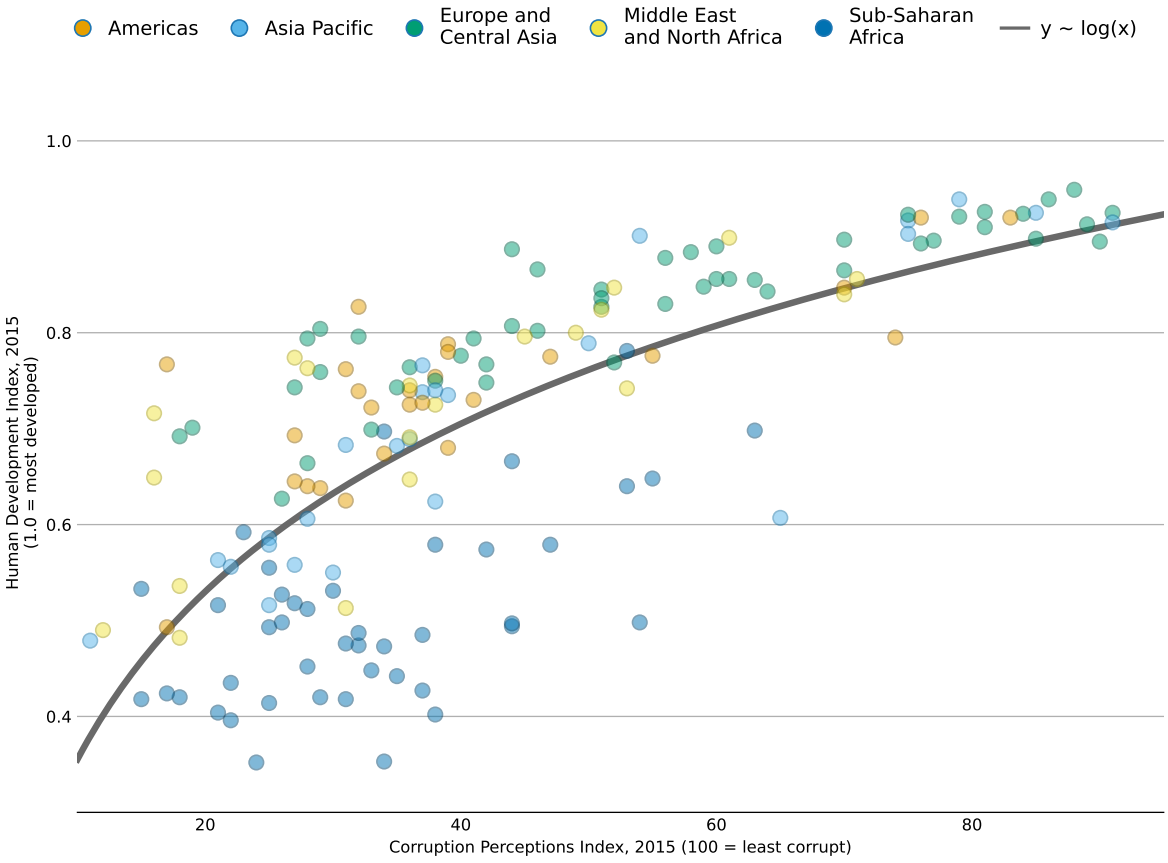

17.5.8 Scatterplots with positive, negative and weak correlation: confidence ellipses

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D08_ConfidenceEllipse.py, and the XML code in the file D08_ConfidenceEllipse.2D.xml.

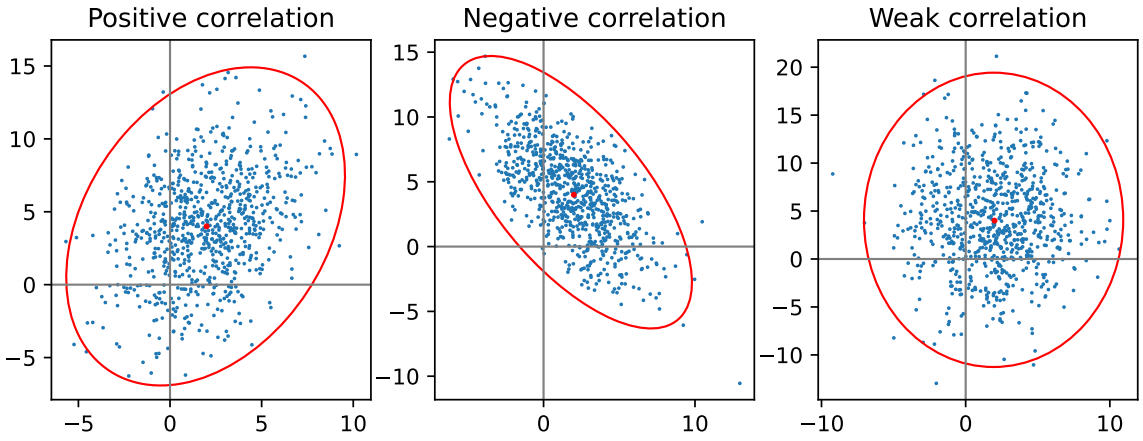

17.5.9 Scatterplot with confidence confidence ellipses at different standard deviations

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D09_ConfidenceEllipse2.py, and the XML code in the file D09_ConfidenceEllipse2.2D.xml.

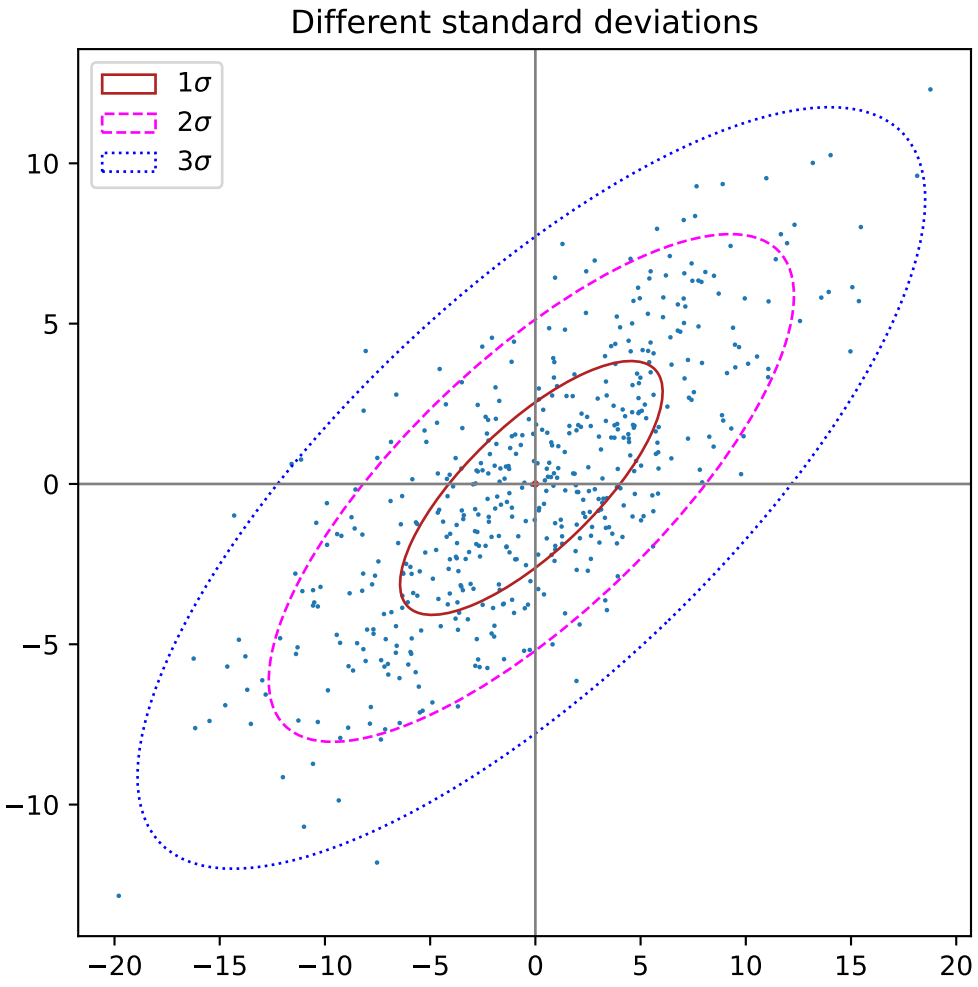

17.5.10 Hexagonal binned plot and marginal histograms (Seaborn)

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D10_Hexagonalbinnedplot.py, and the XML code in the file D10_Hexagonalbinnedplot.2D.xml.

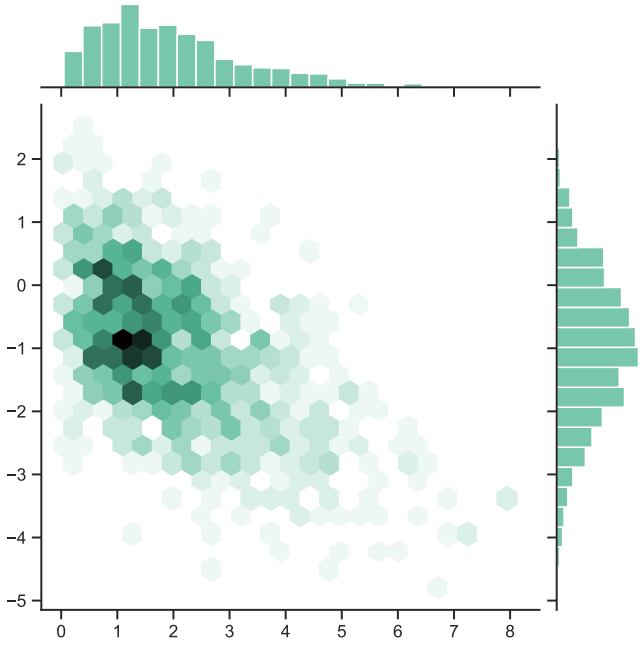

17.5.11 Joint and marginal Kde (Seaborn)

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D11_JointAndMarginalKde.py, and the XML code in the file D11_JointAndMarginalKde.2D.xml.

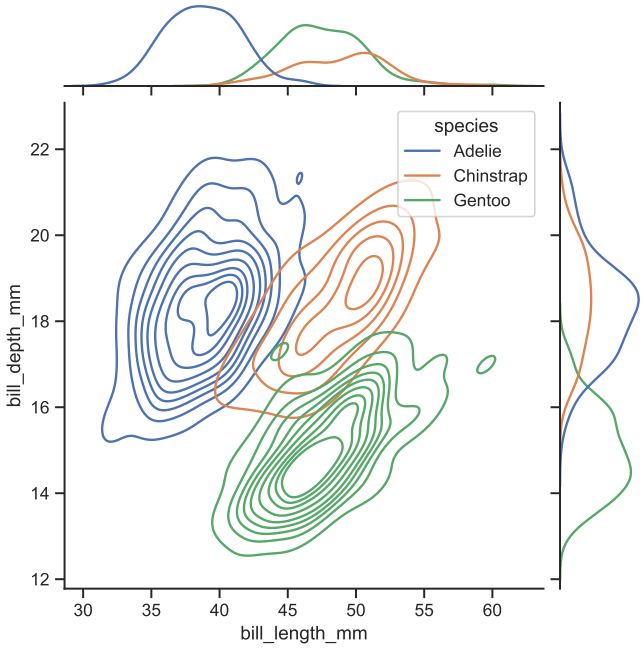

17.5.12 Marginal ticks

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D12_MarginalTicks.py, and the XML code in the file D12_MarginalTicks.2D.xml.

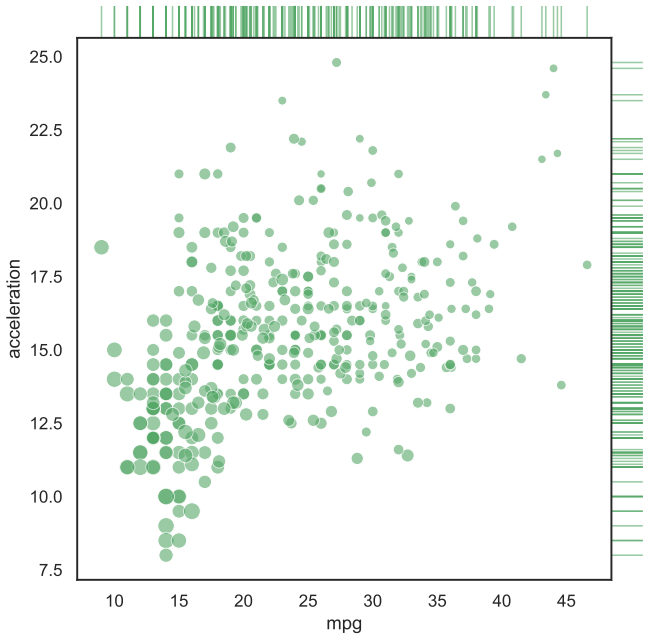

17.5.13 Regression_marginals (Seaborn)

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D13_RegressionMarginals.py, and the XML code in the file D13_RegressionMarginals.2D.xml.

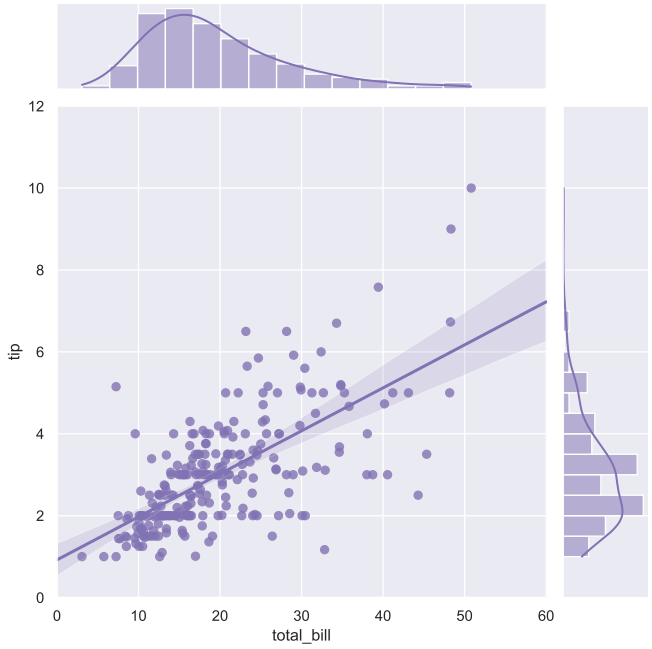

17.5.14 Pair grid with kde (Seaborn)

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D14_PairGridWithKde.py, and the XML code in the file D14_PairGridWithKde.2D.xml.

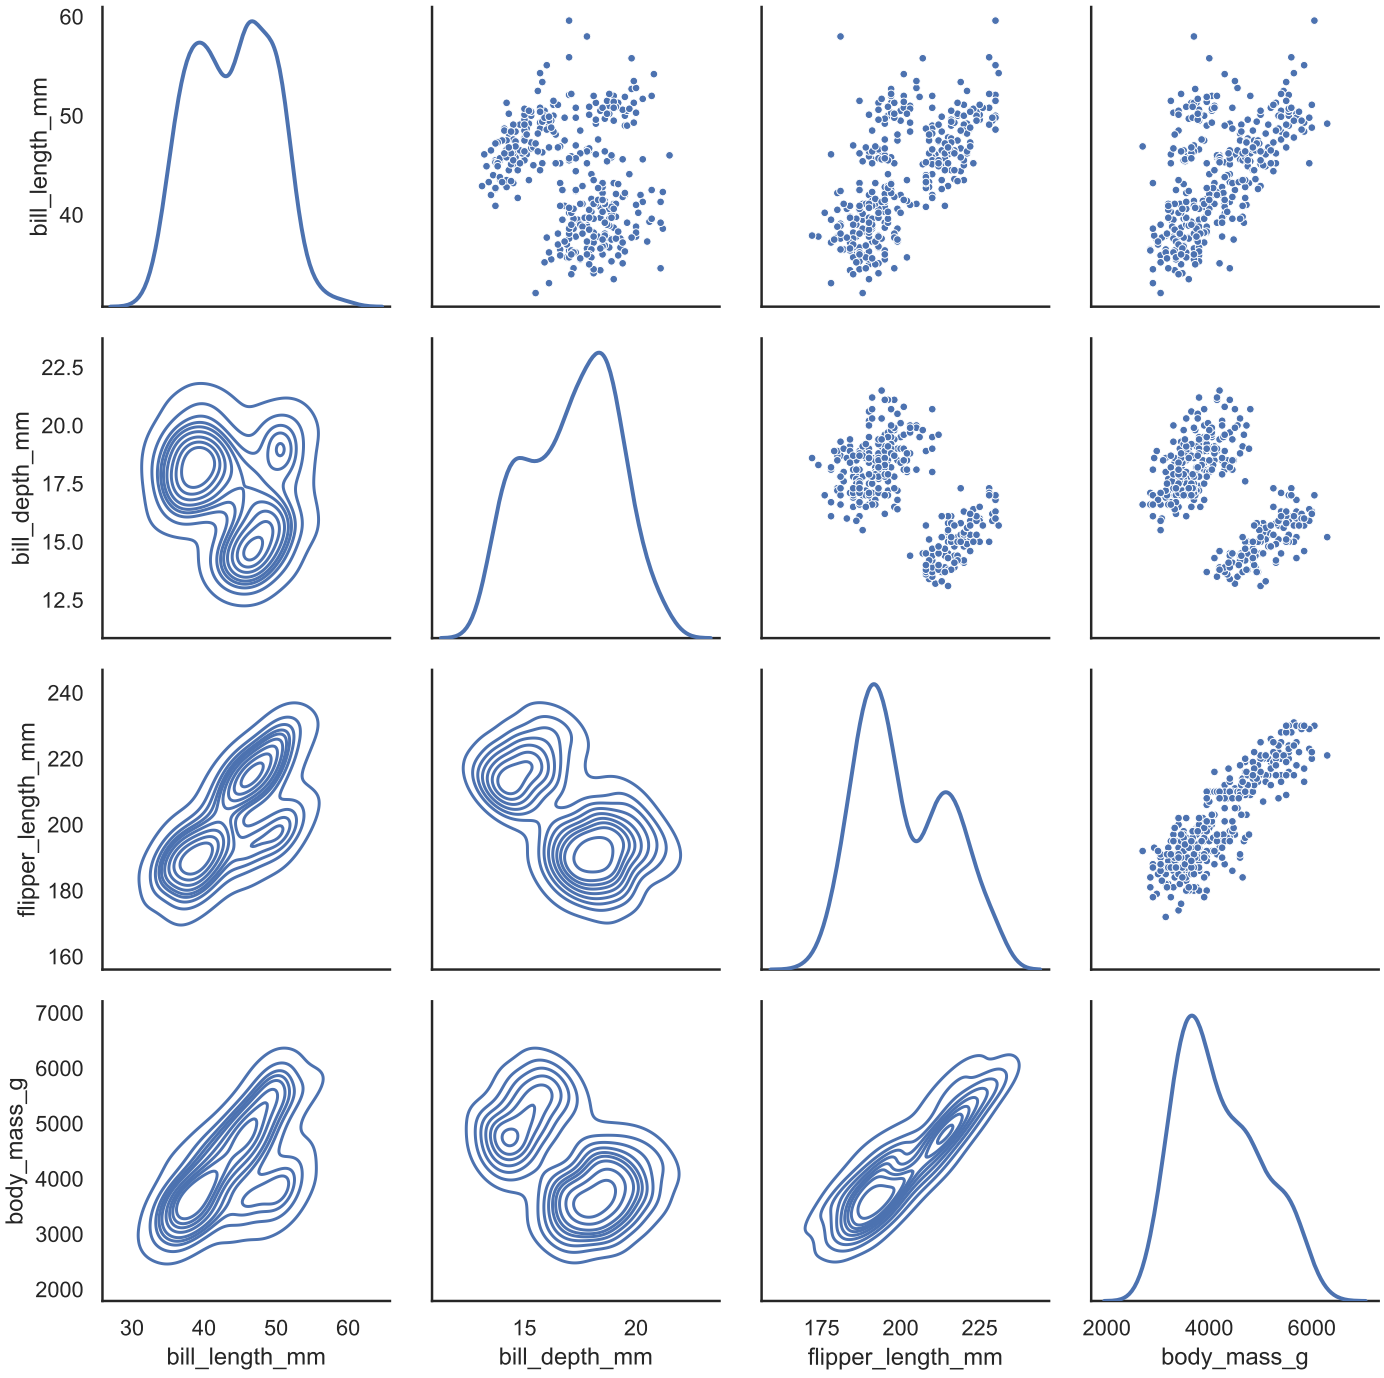

17.5.15 Scatterplot matrix (Seaborn)

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D15_ScatterplotMatrix.py, and the XML code in the file D15_ScatterplotMatrix.2D.xml.

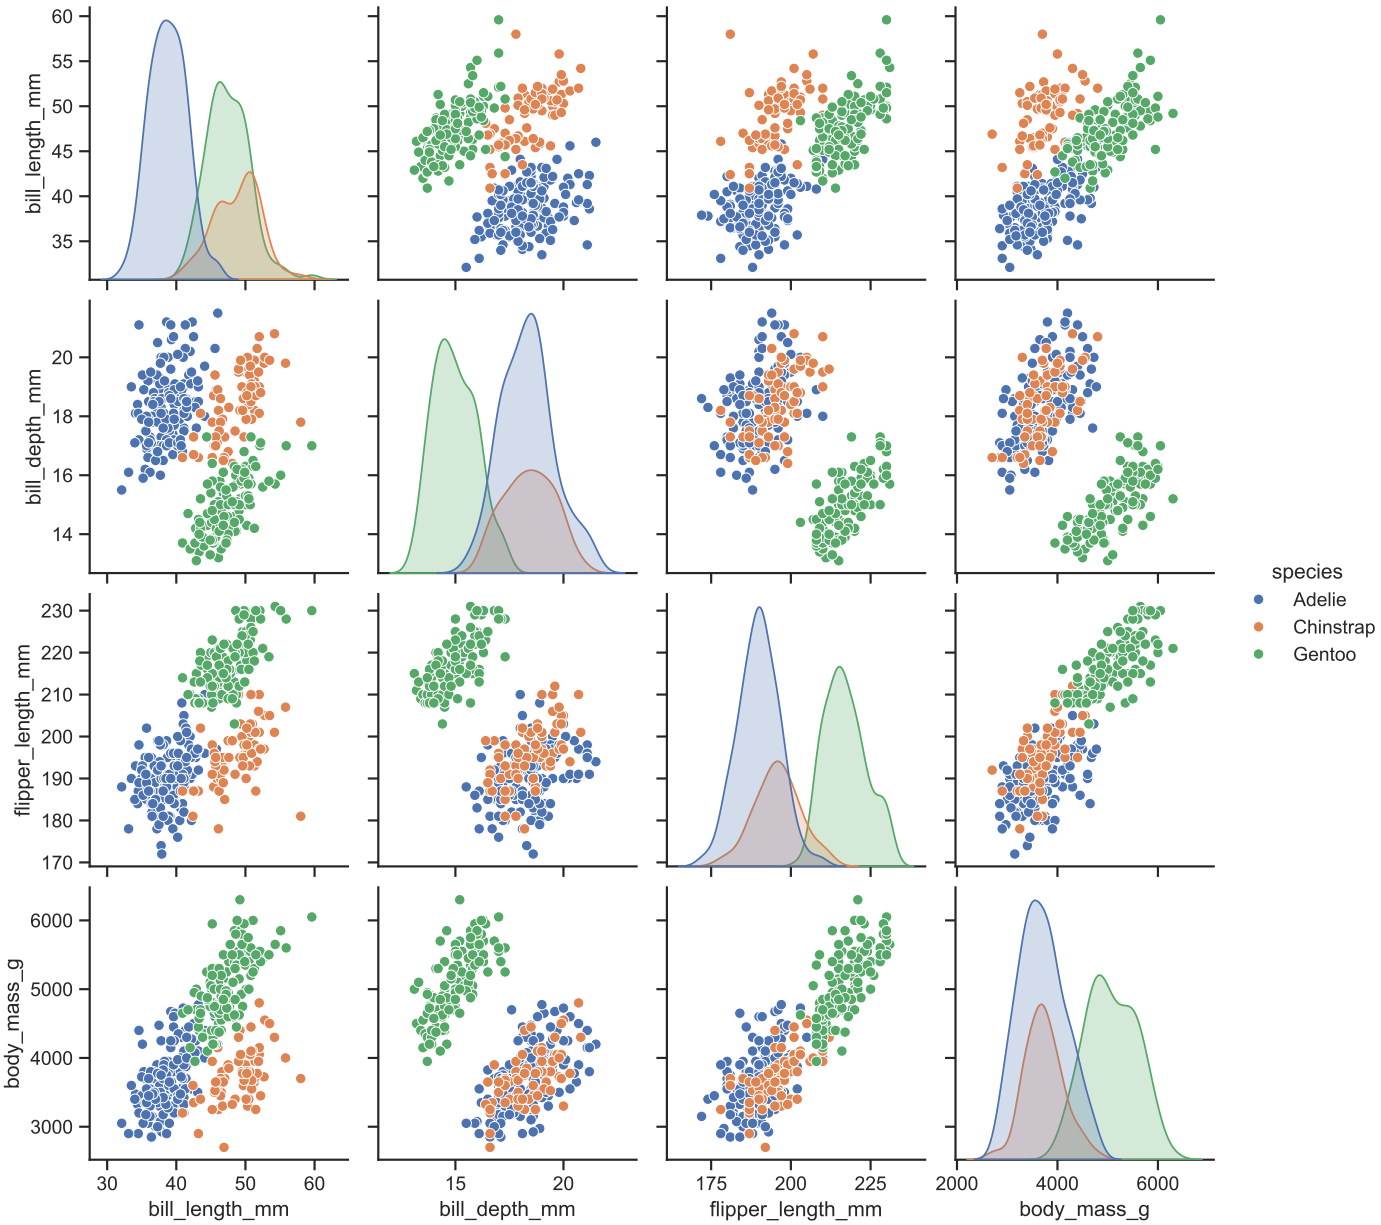

17.6 Financial plots (requires mplfinance)

See also: https://pypi.org/project/mplfinance/

See also: https://github.com/matplotlib/mplfinance

See also for styling : https://coderzcolumn.com/tutorials/data-science/candlestick-chart-in-python-mplfinance-plotly-bokeh

17.6.1 HiLoPlot

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_Mpl_HiLo.py, and the XML code in the file D01_Mpl_HiLo.2D.xml.

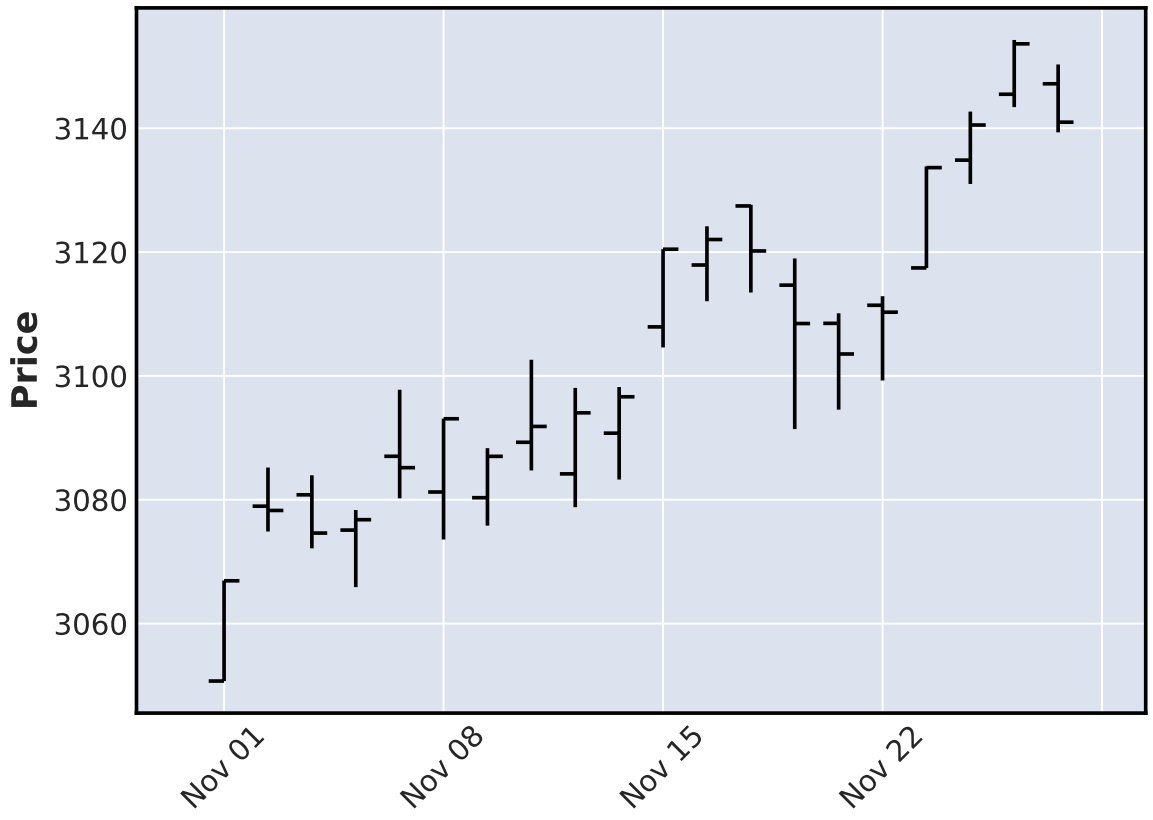

17.6.2 CandlePlot

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02_Mpl_Candle.py, and the XML code in the file D02_Mpl_Candle.2D.xml.

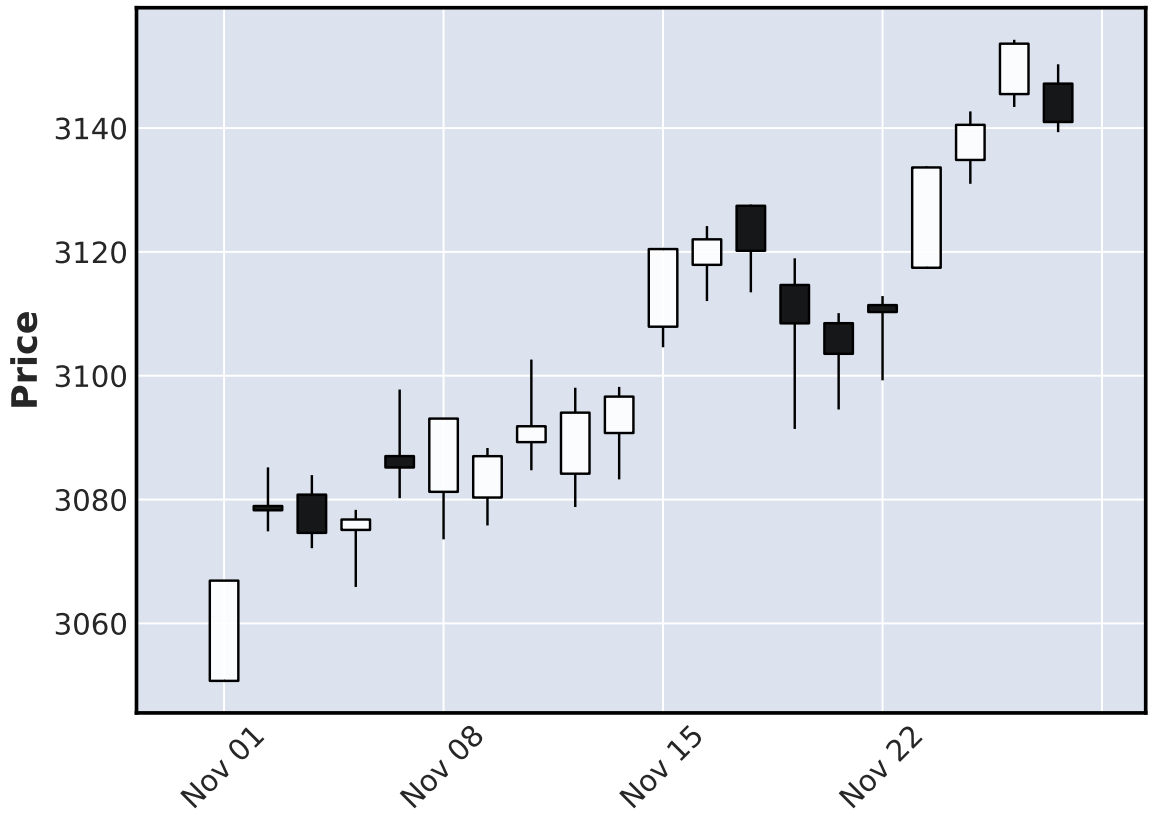

17.6.3 LinePlot

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03_Mpl_Line.py, and the XML code in the file D03_Mpl_Line.2D.xml.

17.6.4 RenkoPlot

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04_Mpl_Renko.py, and the XML code in the file D04_Mpl_Renko.2D.xml.

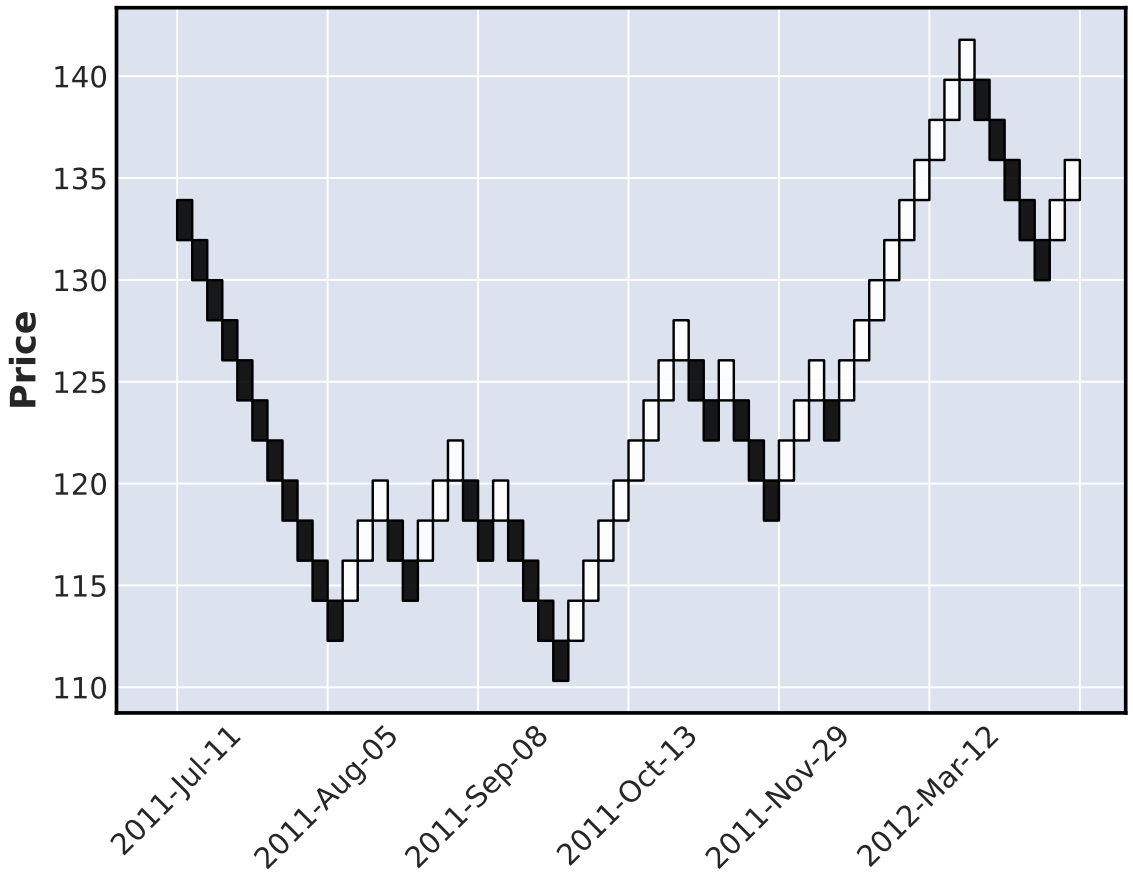

17.6.5 PnfPlot

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05_Mpl_Pnf.py, and the XML code in the file D05_Mpl_Pnf.2D.xml.

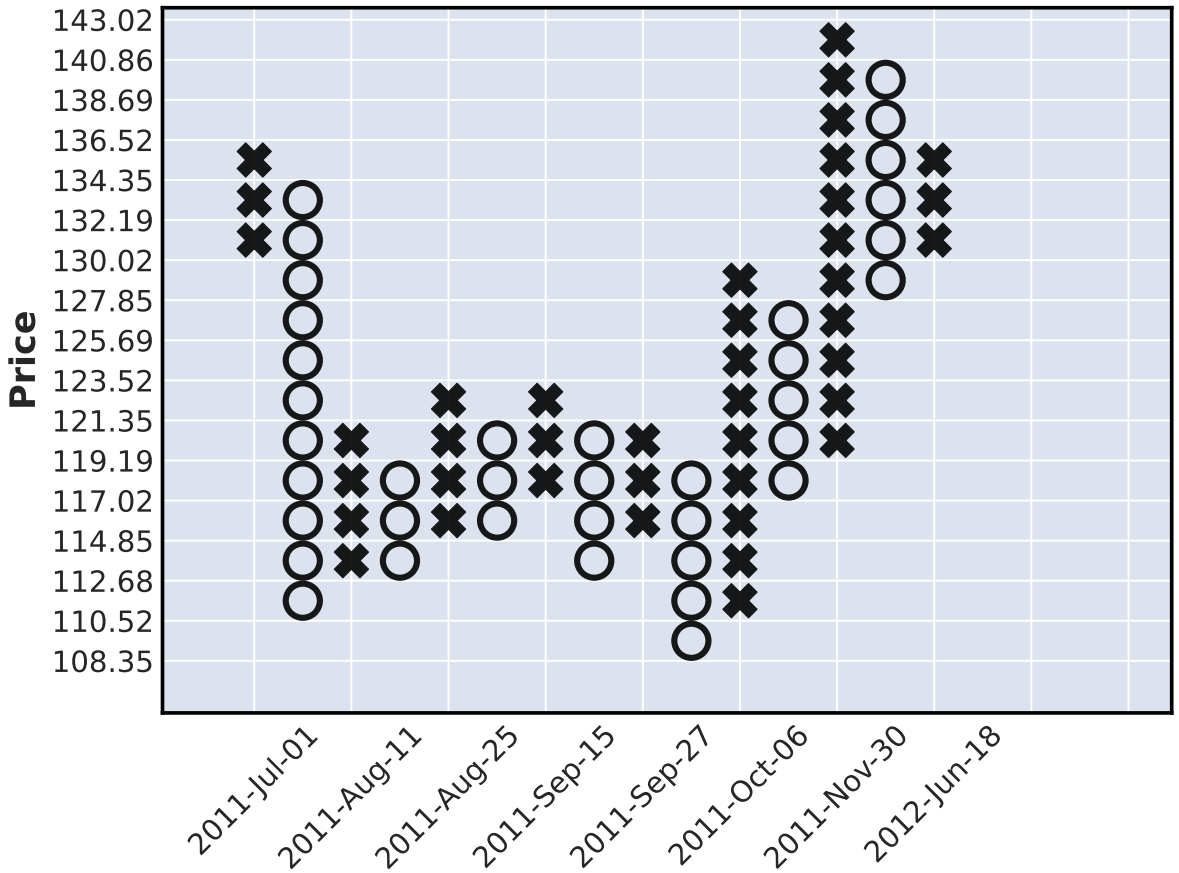

17.6.6 OhlcMav4Plot

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06_Mpl_ohlc_mav.py, and the XML code in the file D06_Mpl_ohlc_mav.2D.xml.

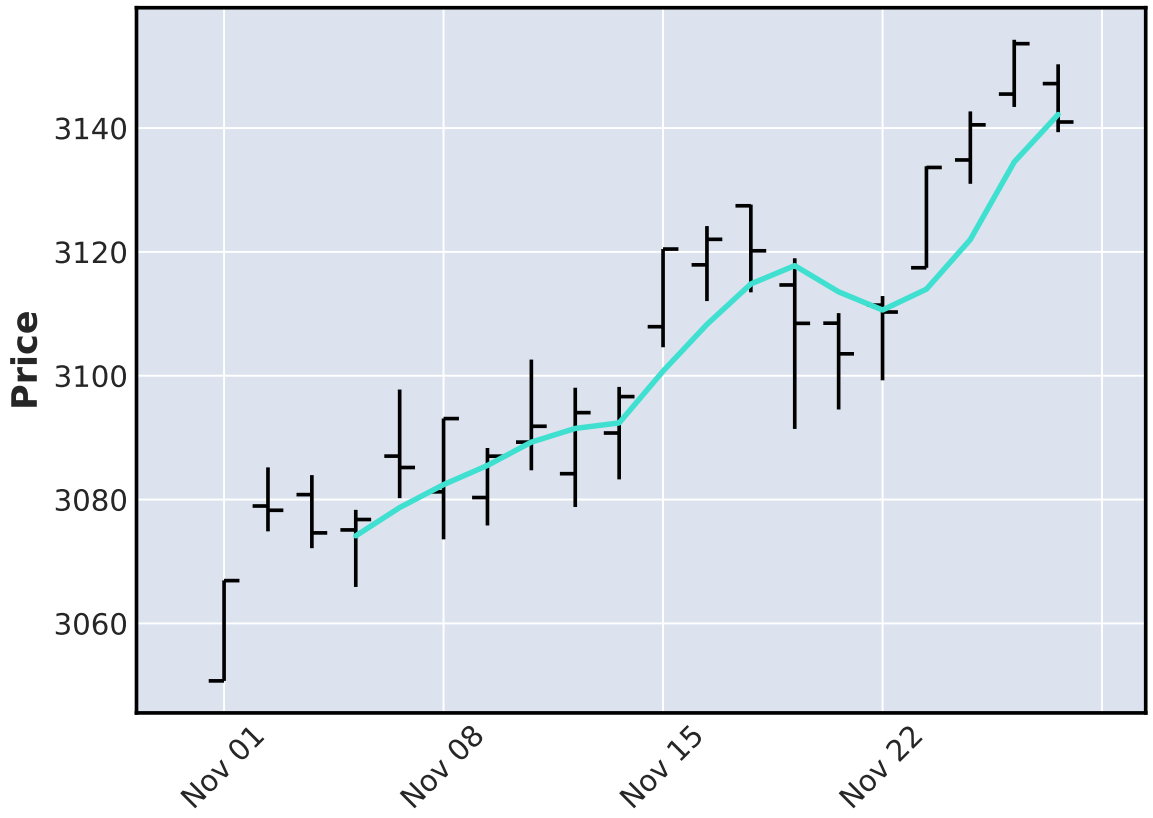

17.6.7 CandleMav369Plot

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07_Mpl_candle_mav369.py, and the XML code in the file D07_Mpl_candle_mav369.2D.xml.

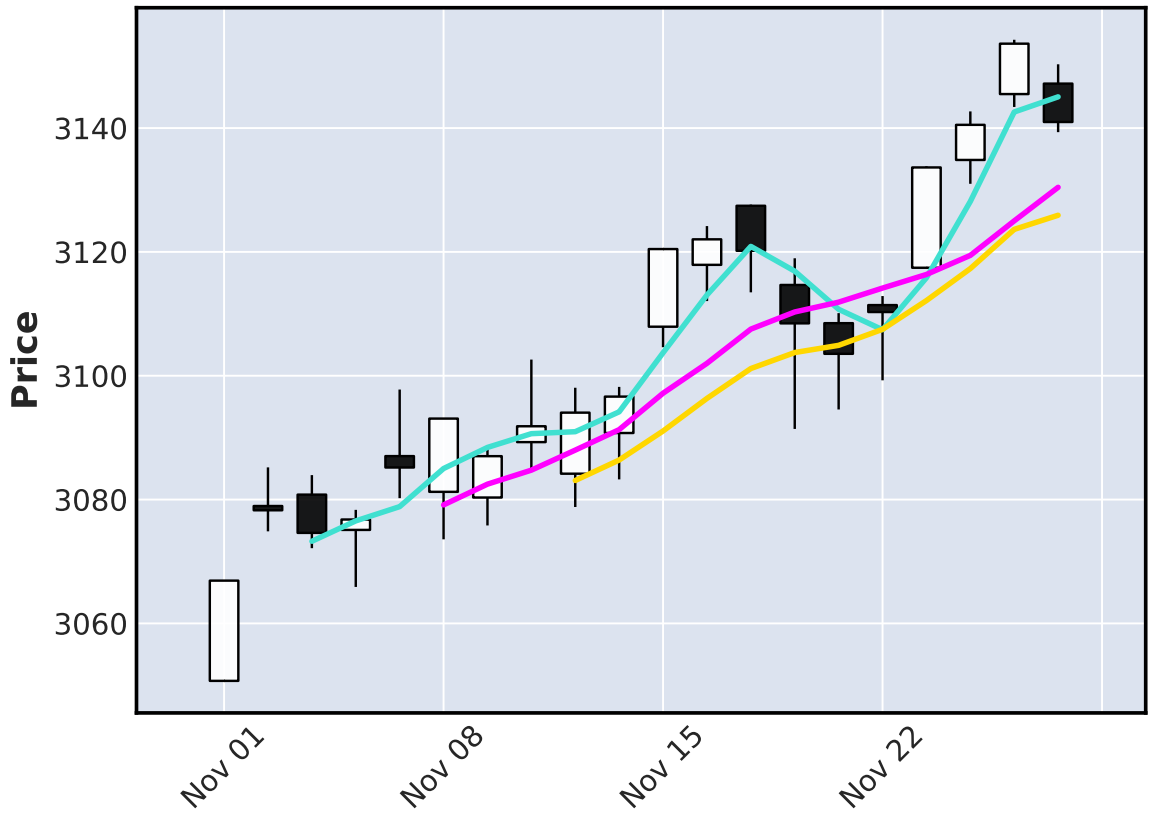

17.6.8 CandleMav369VolPlot

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D08_Mpl_candle_mav369_vol.py, and the XML code in the file D08_Mpl_candle_mav369_vol.2D.xml.

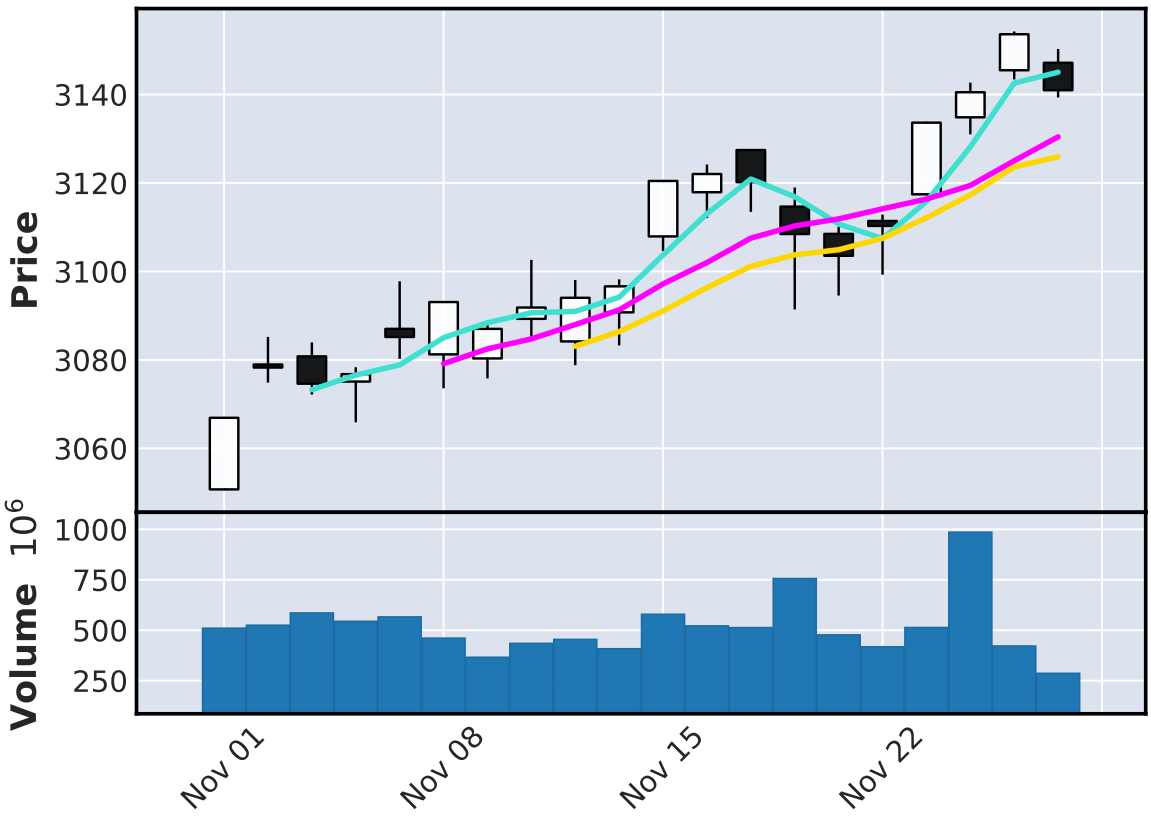

17.6.9 CandleMav369VolNonTradPlot

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D09_Mpl_candle_mav369_vol_nontrad.py, and the XML code in the file D09_Mpl_candle_mav369_vol_nontrad.2D.xml.

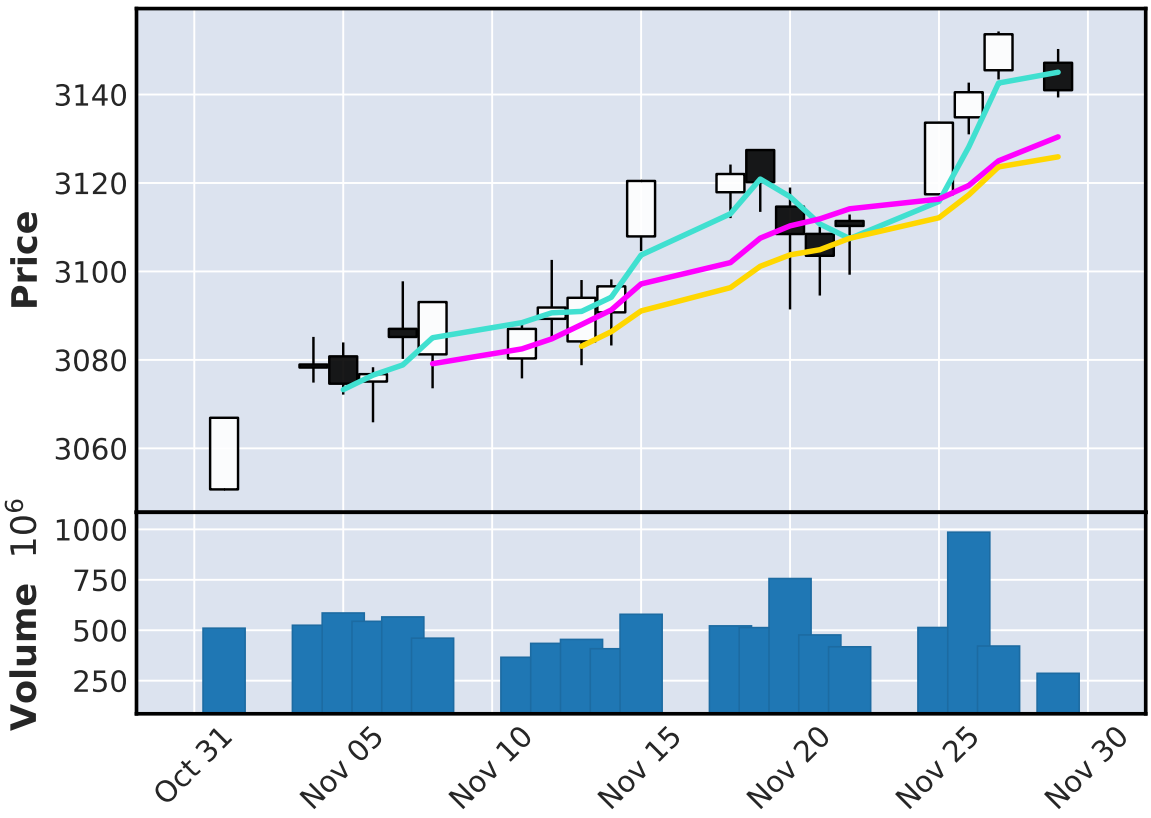

17.7 Geographic data (requires cartopy)

17.7.1 Antarctis

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_Antarctis.py, and the XML code in the file D01_Antarctis.2D.xml.

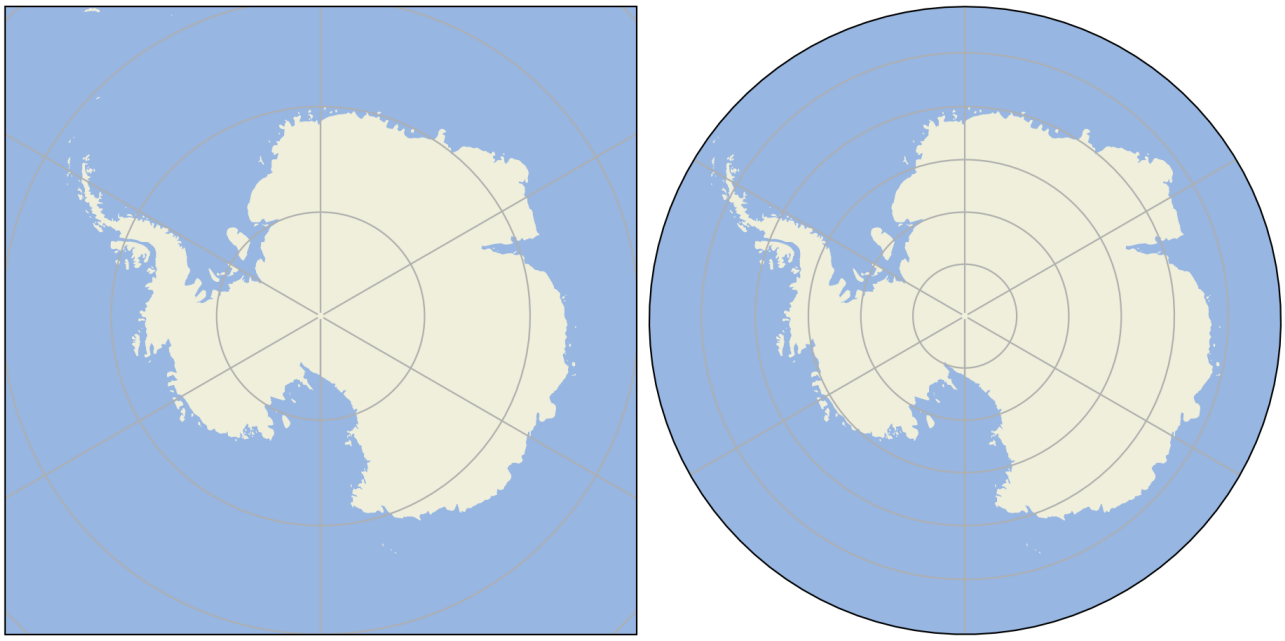

17.7.2 Australia

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02_Australia.py, and the XML code in the file D02_Australia.2D.xml.

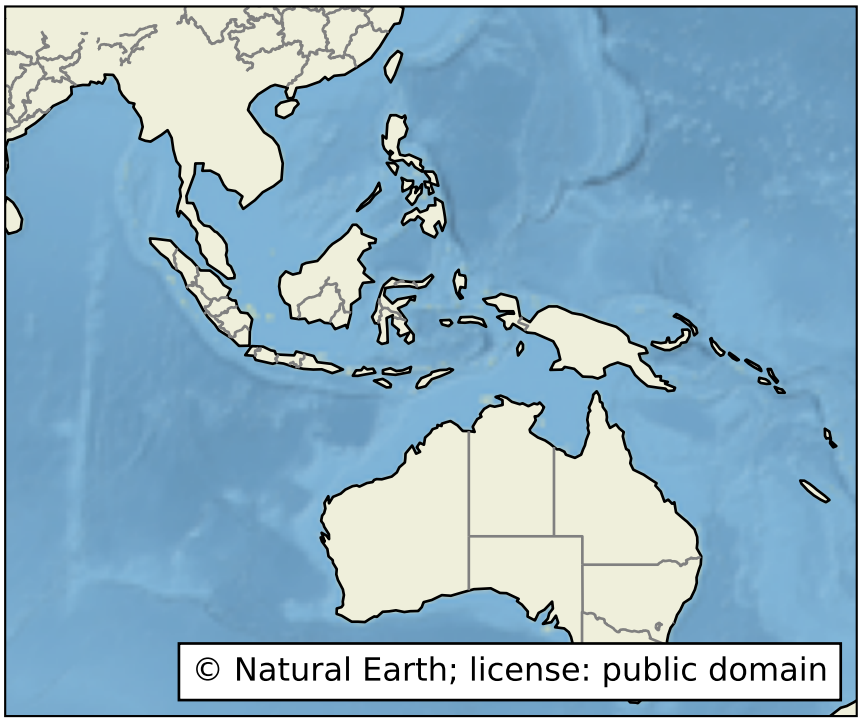

17.7.3 Africa

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03_Africa.py, and the XML code in the file D03_Africa.2D.xml.

17.7.4 World Flight

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04_WorldFlight.py, and the XML code in the file D04_WorldFlight.2D.xml.

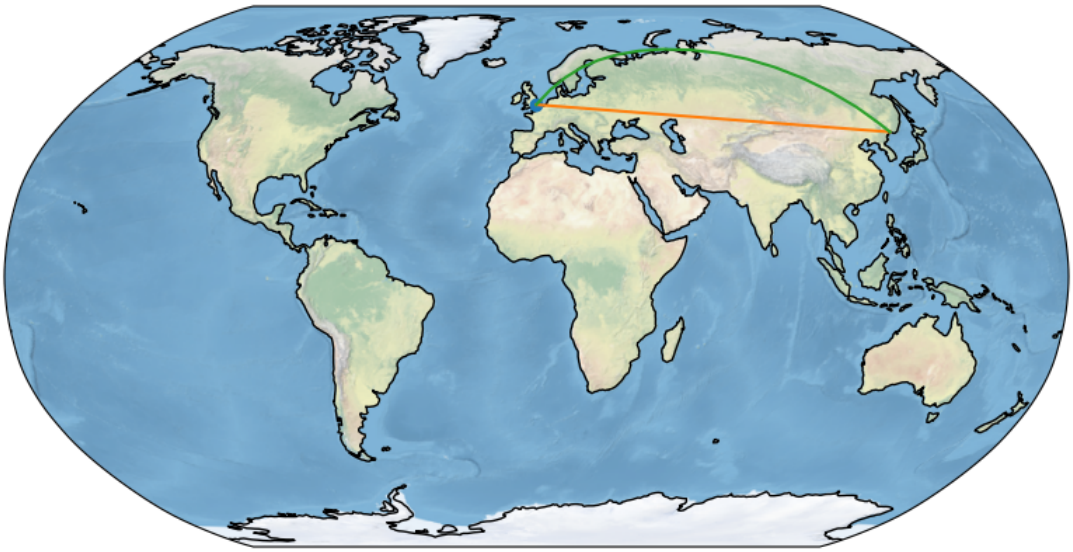

17.7.5 World Night Shading

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05_WorldNightShading.py, and the XML code in the file D05_WorldNightShading.2D.xml.

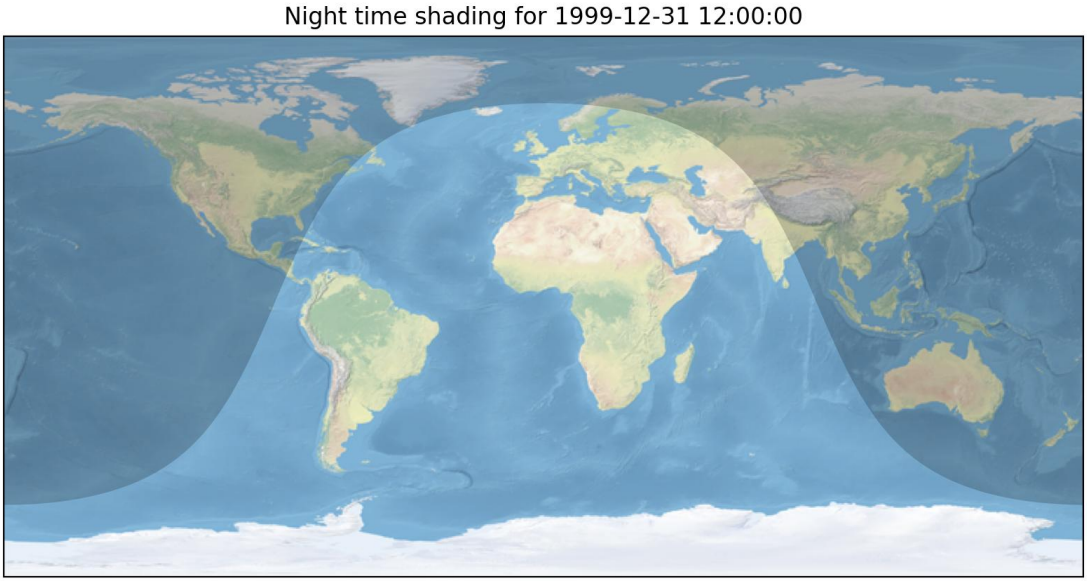

17.7.6 World2projections

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06_World2Projections.py, and the XML code in the file D06_World2Projections.2D.xml.

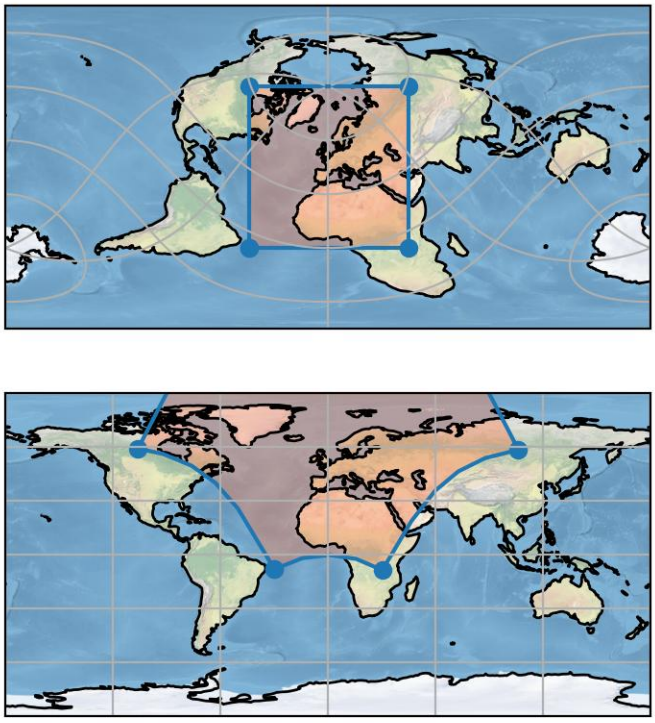

17.7.7 Country population estimates

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07_CountryPopulationEstimates.py, and the XML code in the file D07_CountryPopulationEstimates.2D.xml.

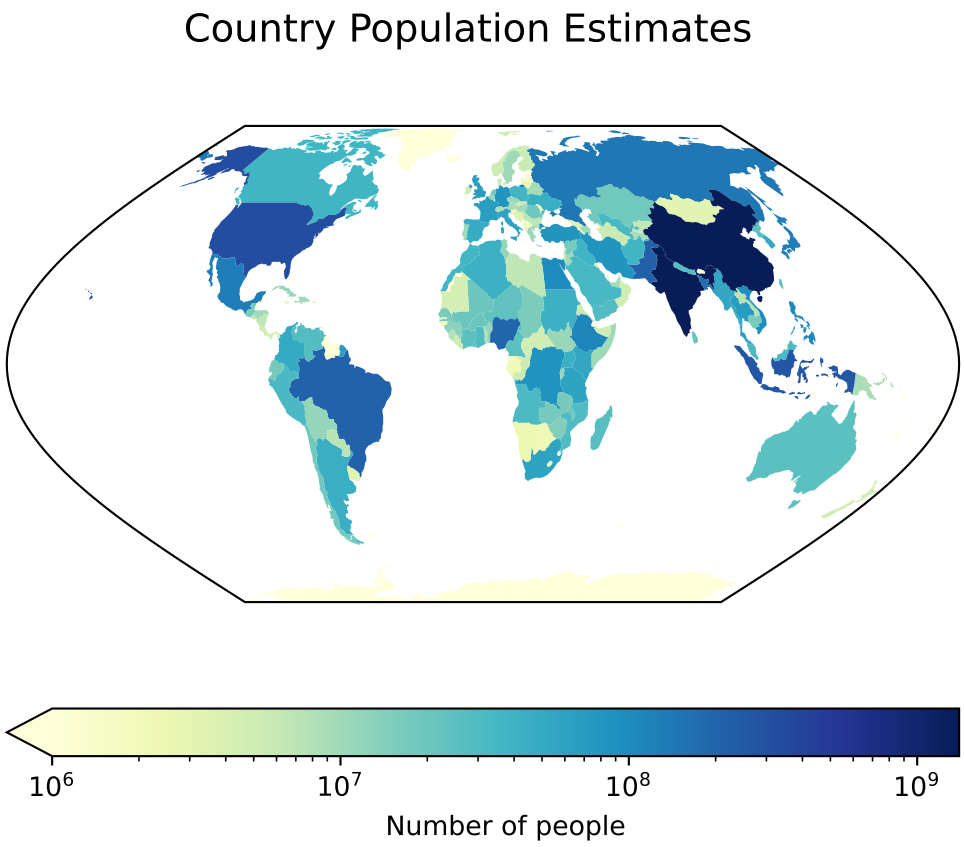

17.7.8 Arctis and Antarctis

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D08_ArctisAndAntarctis.py, and the XML code in the file D08_ArctisAndAntarctis.2D.xml.

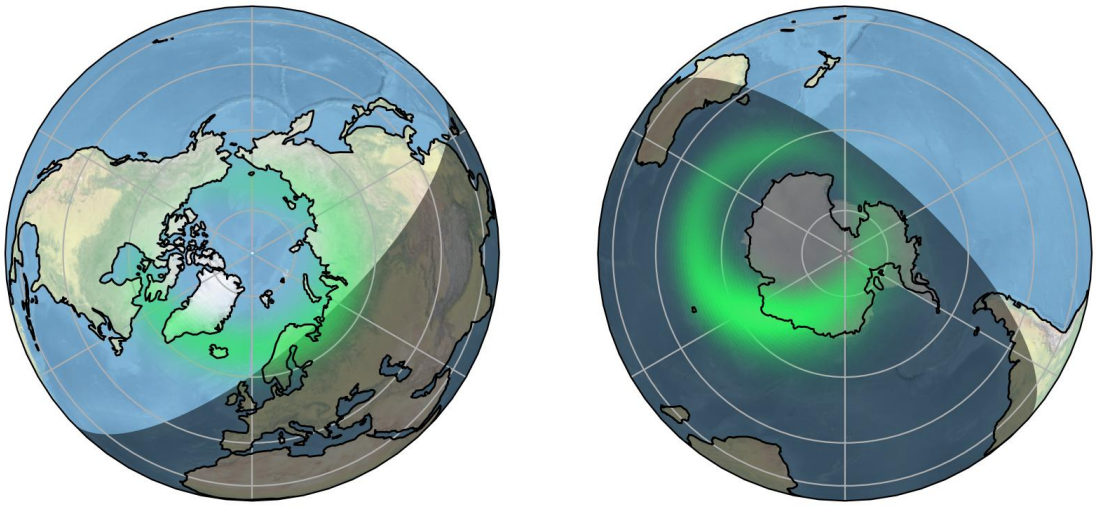

17.7.9 Geographic Mapping, with longitude and altitude on 4 axes crs=ccrs.PlateCarree

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D09_GeographicMapping1.py, and the XML code in the file D09_GeographicMapping1.2D.xml.

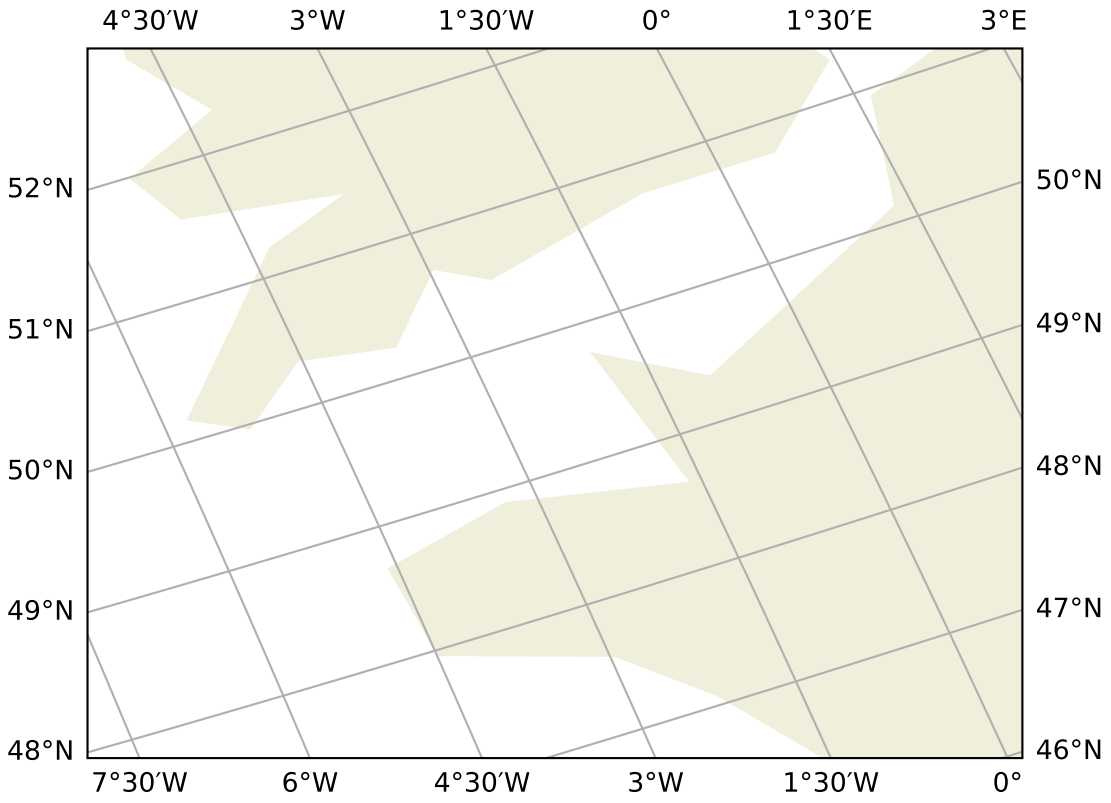

17.7.10 Geographic Mapping, World, projection=ccrs.InterruptedGoodeHomolosine

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D10_GeographicMapping2.py, and the XML code in the file D10_GeographicMapping2.2D.xml.

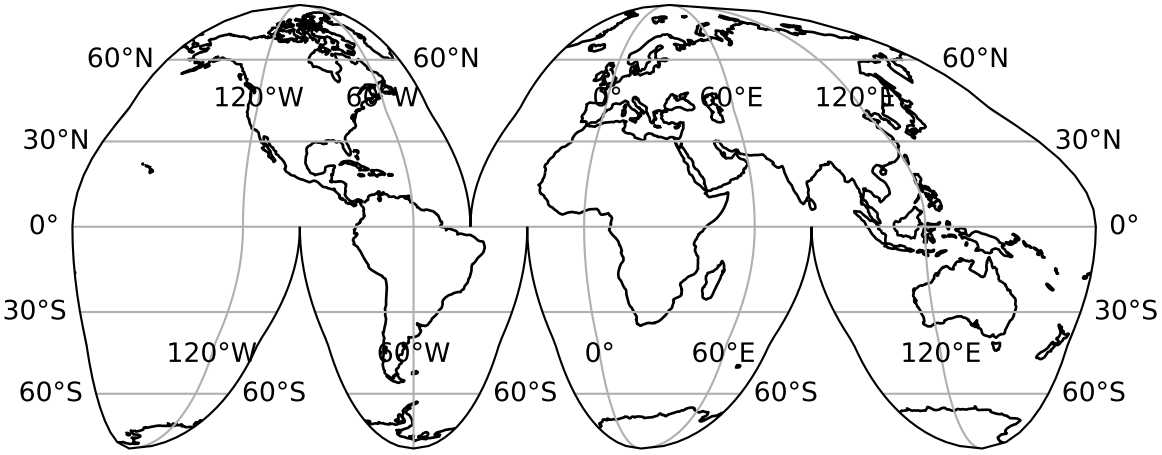

17.7.11 Geographic Mapping, World, projection=ccrs.PlateCarree

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D11_GeographicMapping3.py, and the XML code in the file D11_GeographicMapping3.2D.xml.

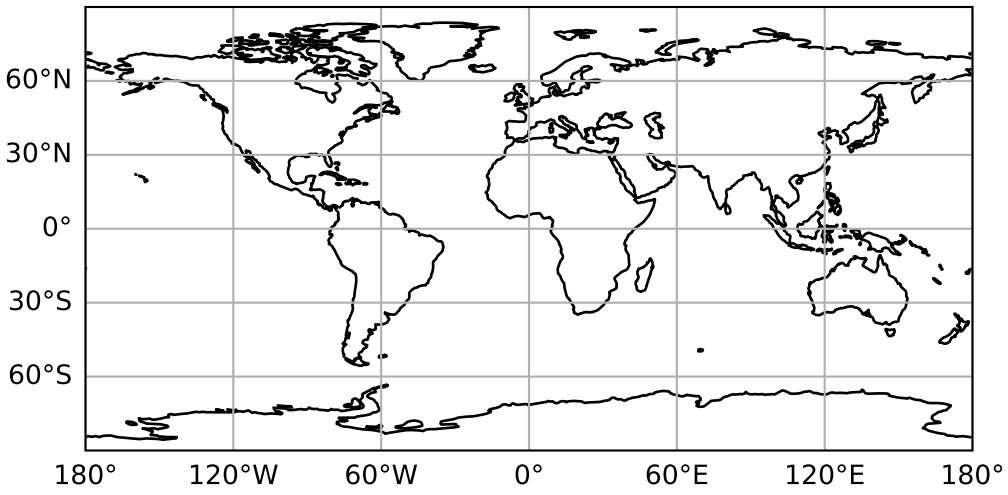

17.7.12 Labelling projection axes: PlateCarree and Mercator

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D12_LabellingProjectionAxis.py, and the XML code in the file D12_LabellingProjectionAxis.2D.xml.

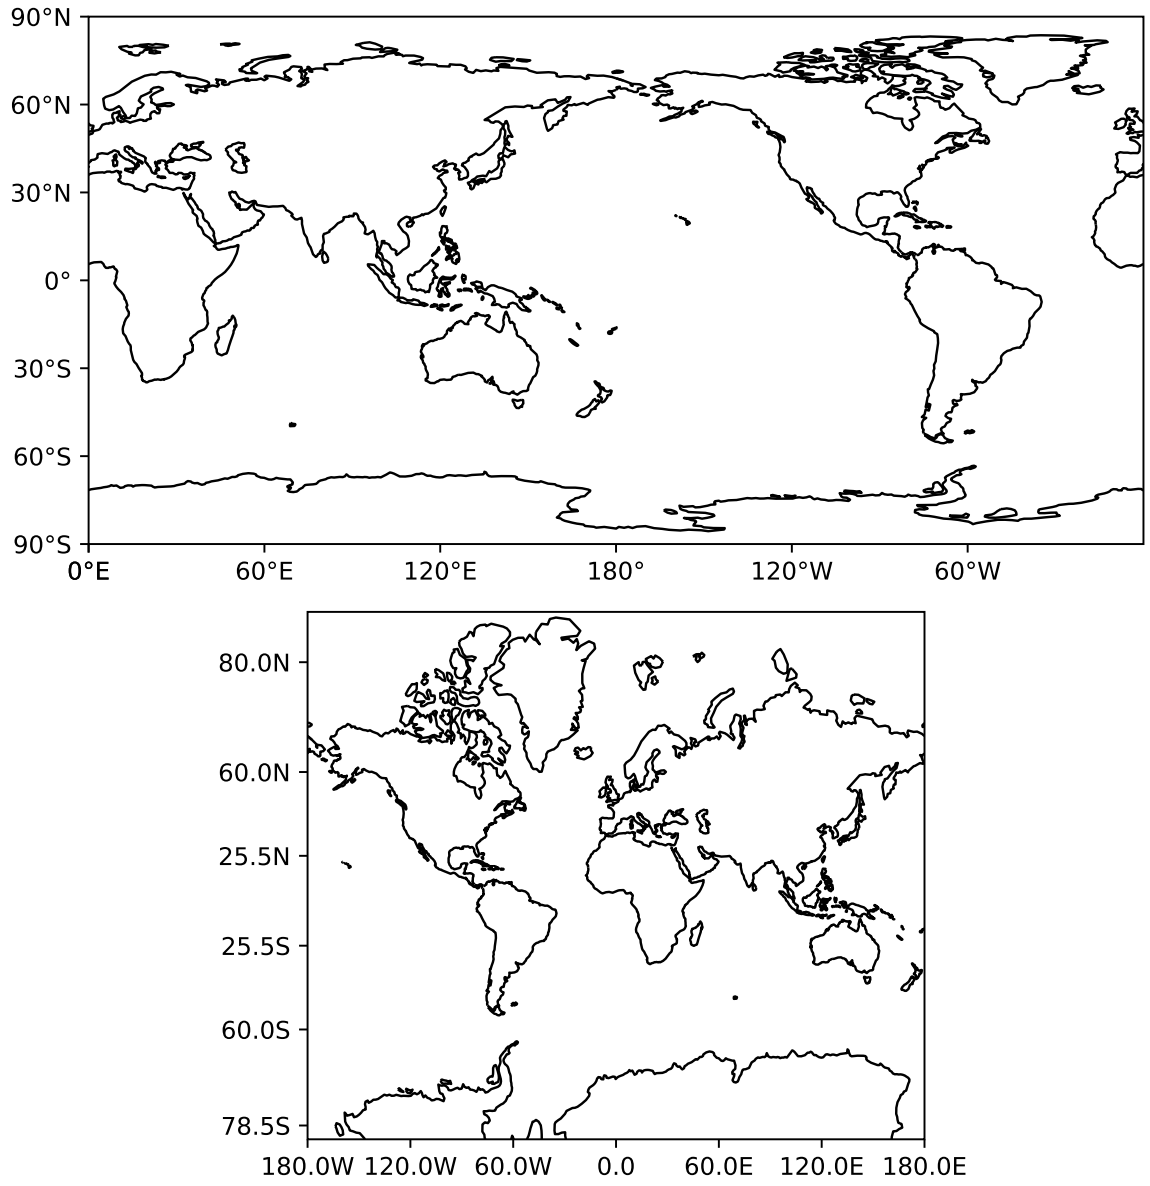

17.8 Geographic data (requires geopandas)

17.8.1 World Happiness Report 2019

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_World.py, and the XML code in the file D01_World.2D.xml.

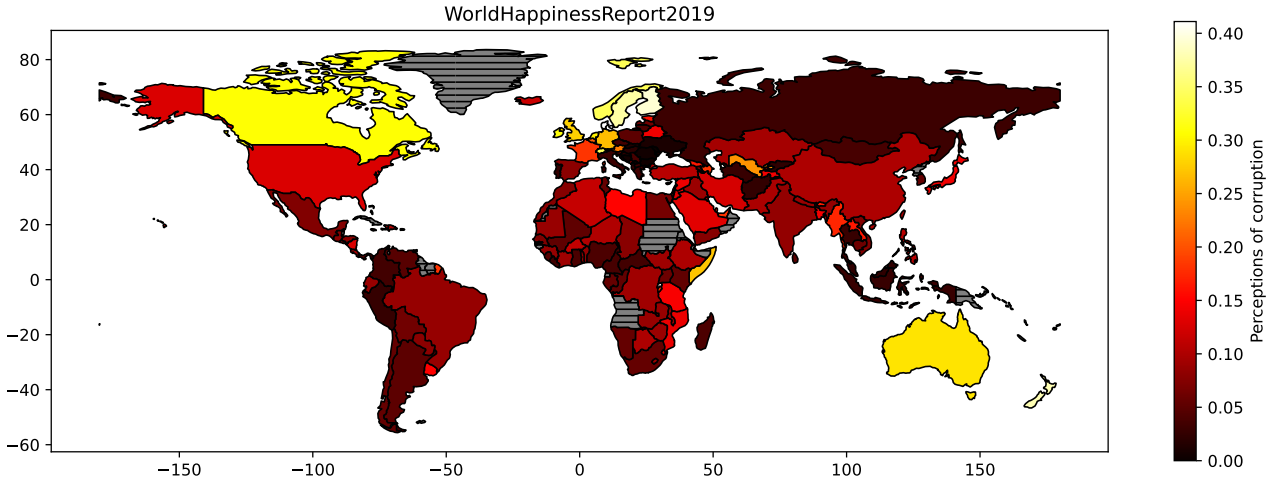

17.8.2 World Happiness Report 2019: Europe

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02_Europe.py, and the XML code in the file D02_Europe.2D.xml.

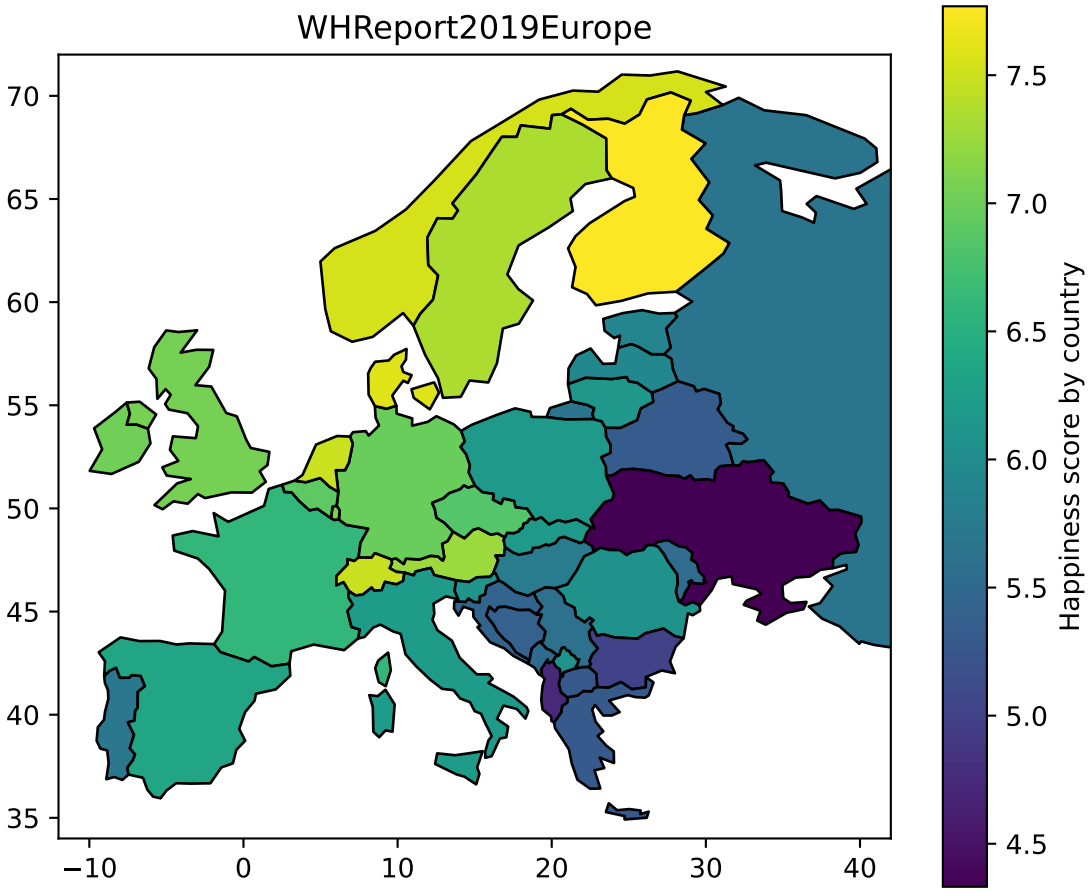

17.8.3 US state populations

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03_USPopulation.py, and the XML code in the file D03_USPopulation.2D.xml.

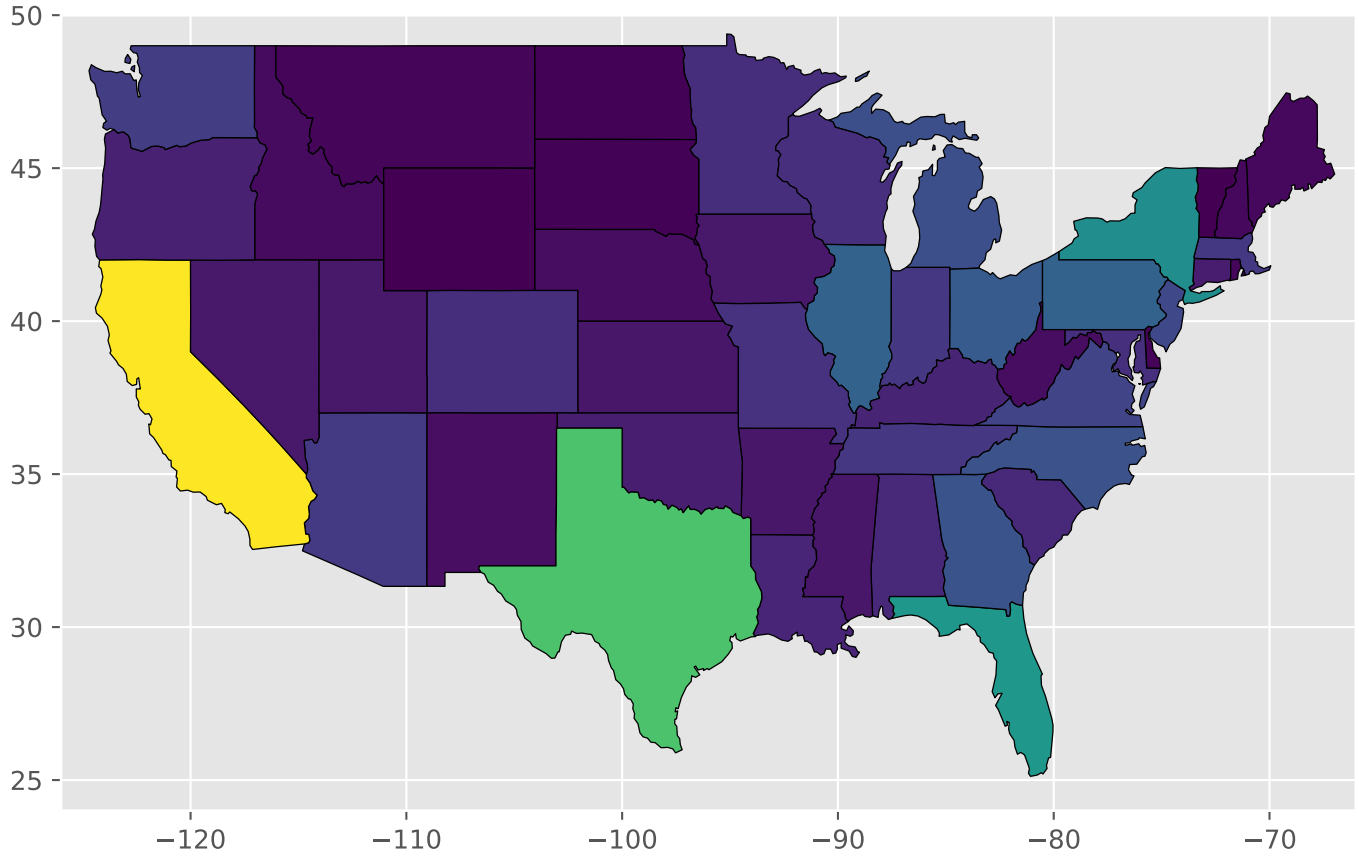

17.8.4 California

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04_Californa.py, and the XML code in the file D04_Californa.2D.xml.

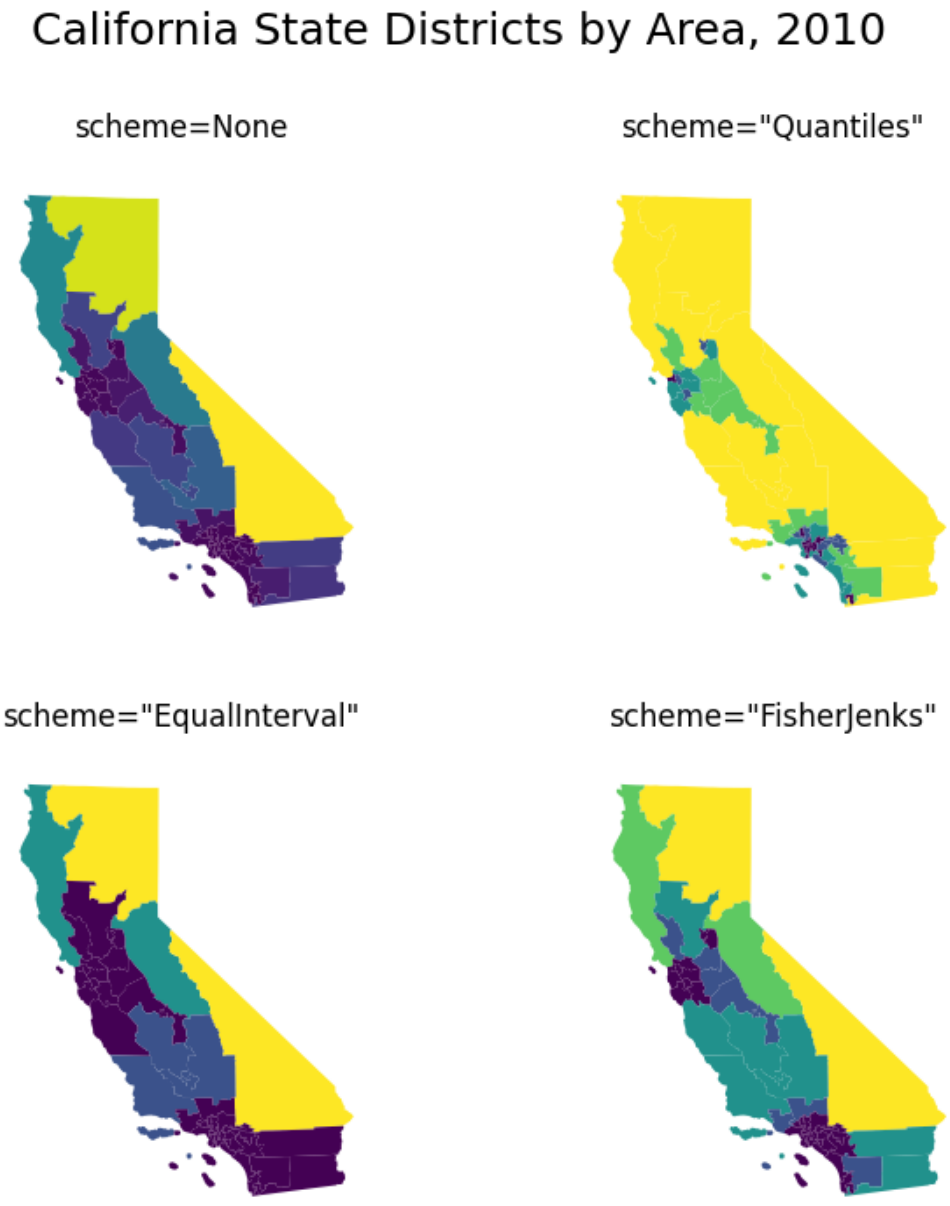

17.8.5 Berlin, Esda

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05_Berlin.py, and the XML code in the file D05_Berlin.2D.xml.

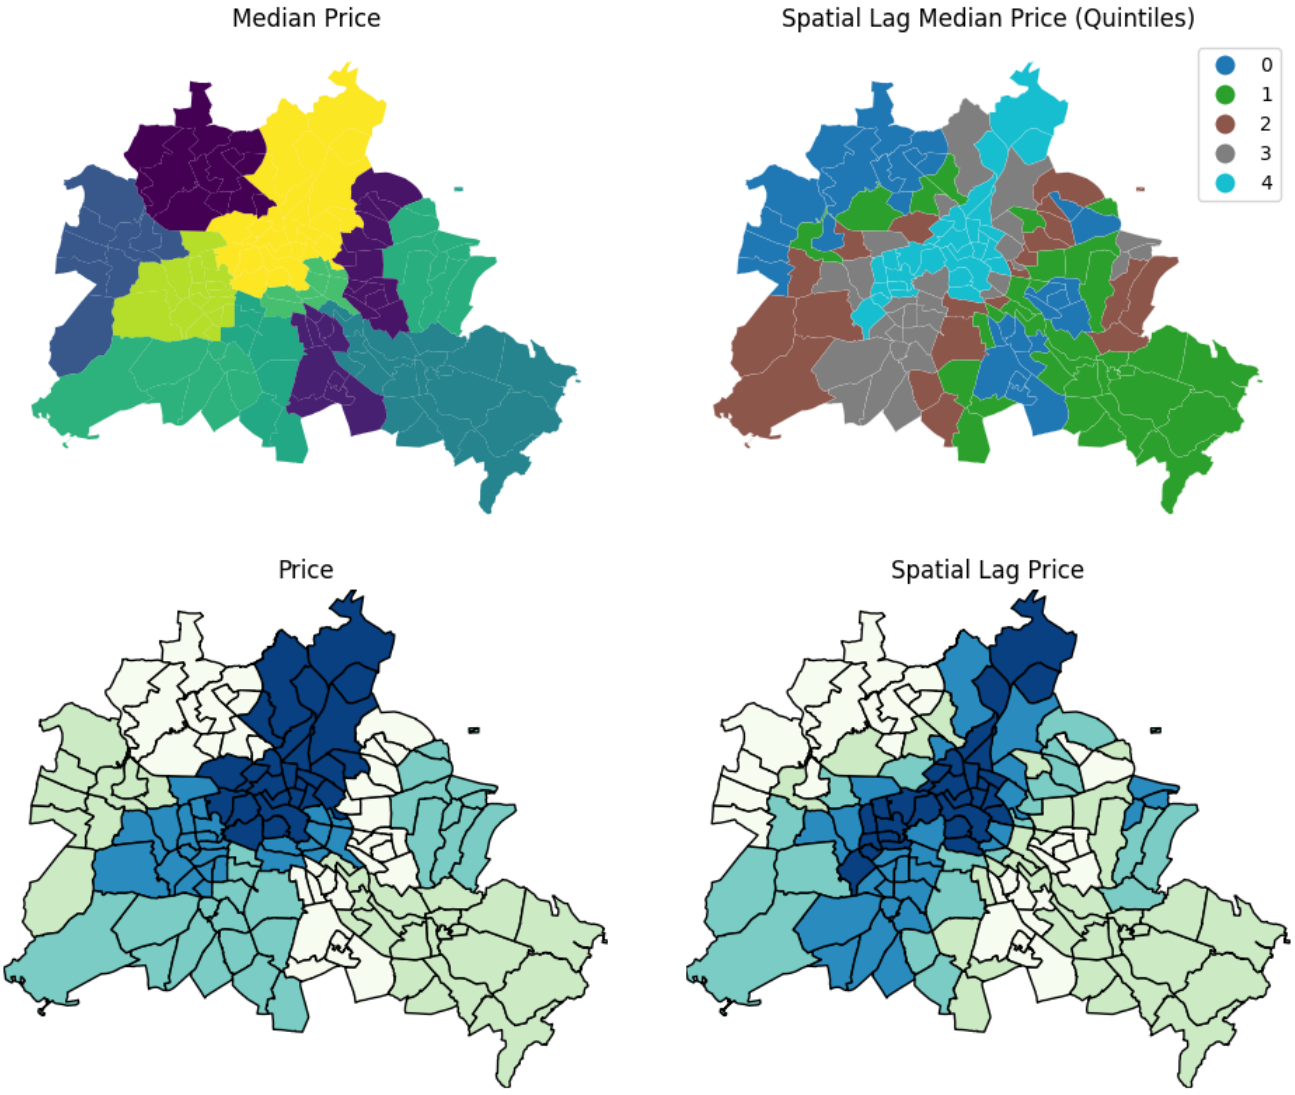

17.8.6 New York, Collisions

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06_NY_Collisions.py, and the XML code in the file D06_NY_Collisions.2D.xml.

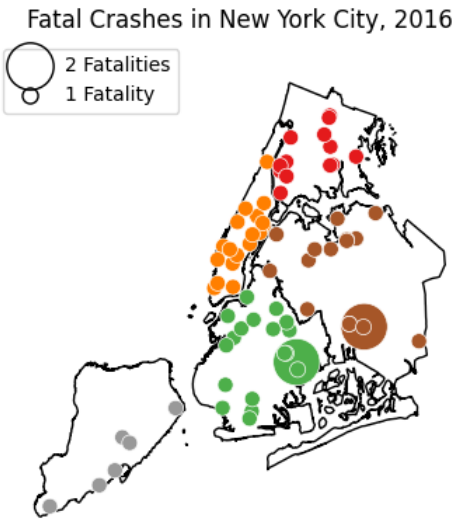

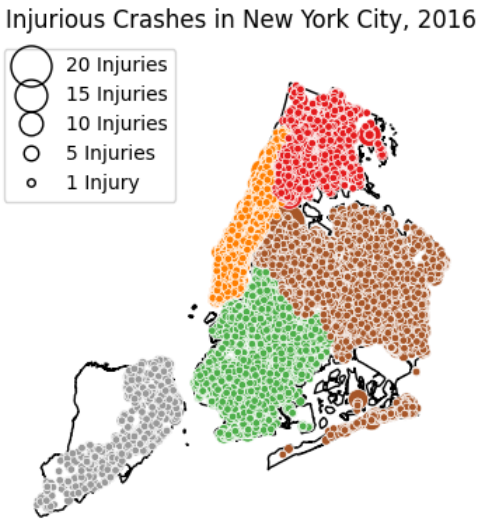

17.8.7 New York, Tickets

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07_NY_Tickets.py, and the XML code in the file D07_NY_Tickets.2D.xml.

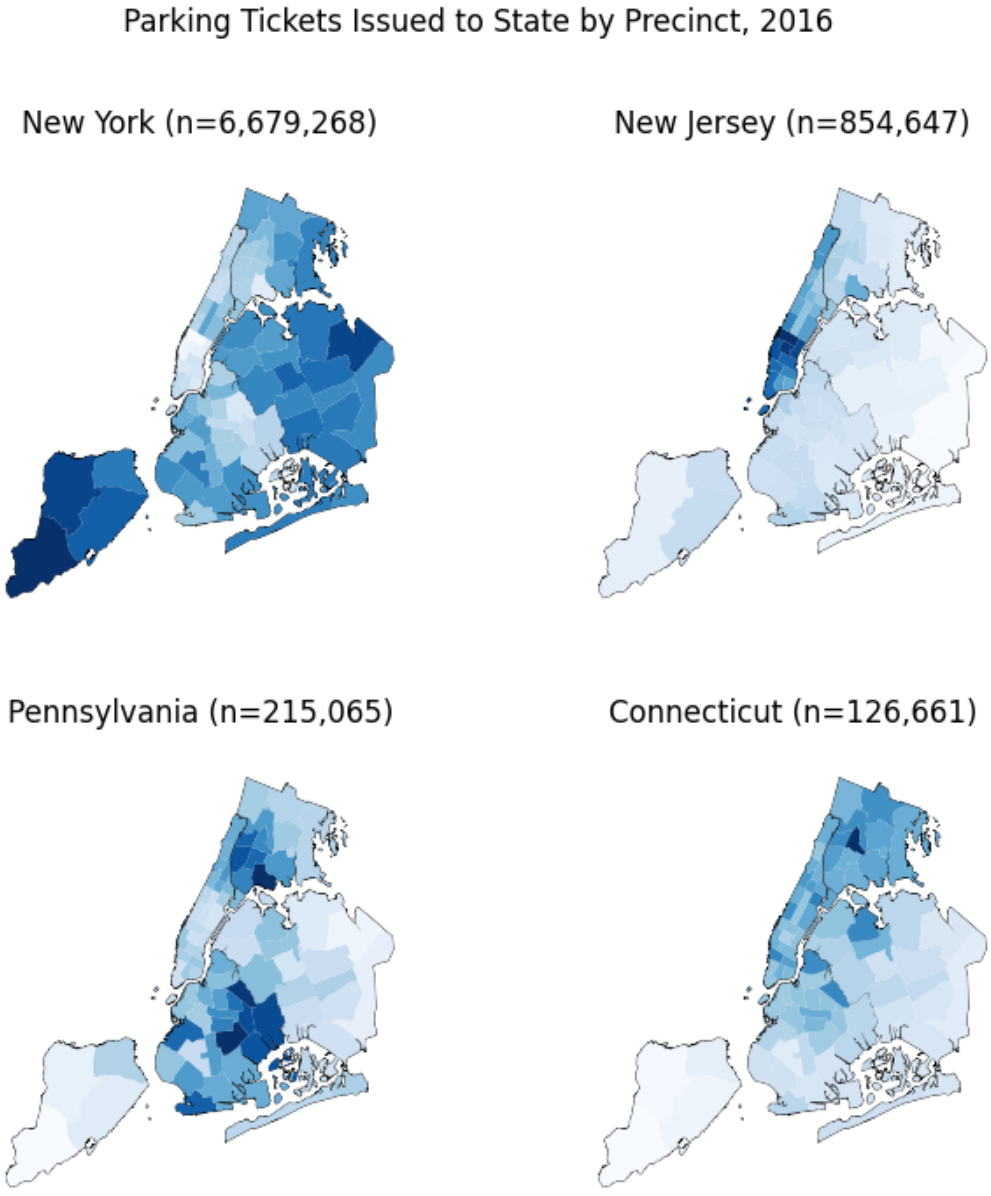

17.8.8 New York, Factors

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D08_NY_Factors.py, and the XML code in the file D08_NY_Factors.2D.xml.

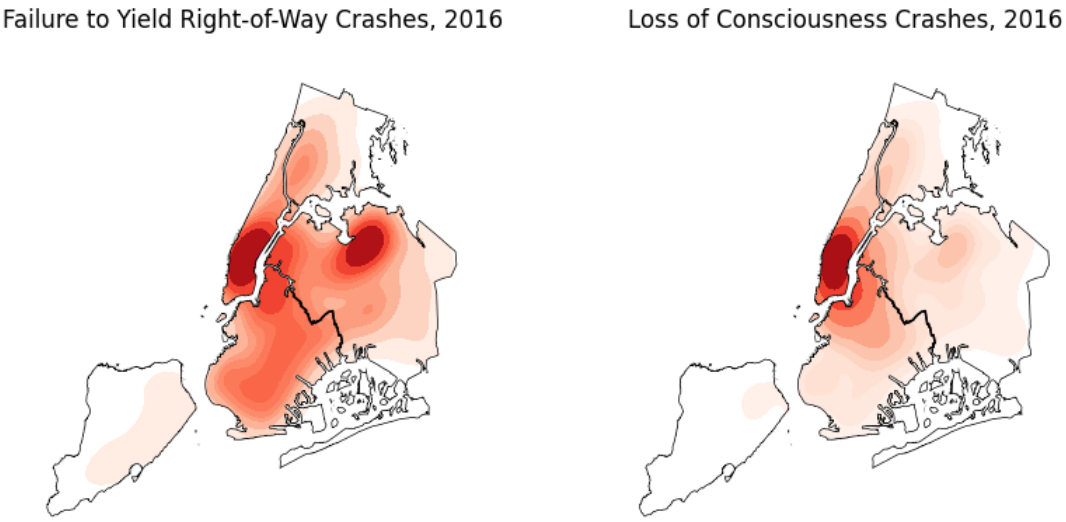

17.8.9 Europe CO2 Emissions

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D09_EuropeCO2.py, and the XML code in the file D09_EuropeCO2.2D.xml.

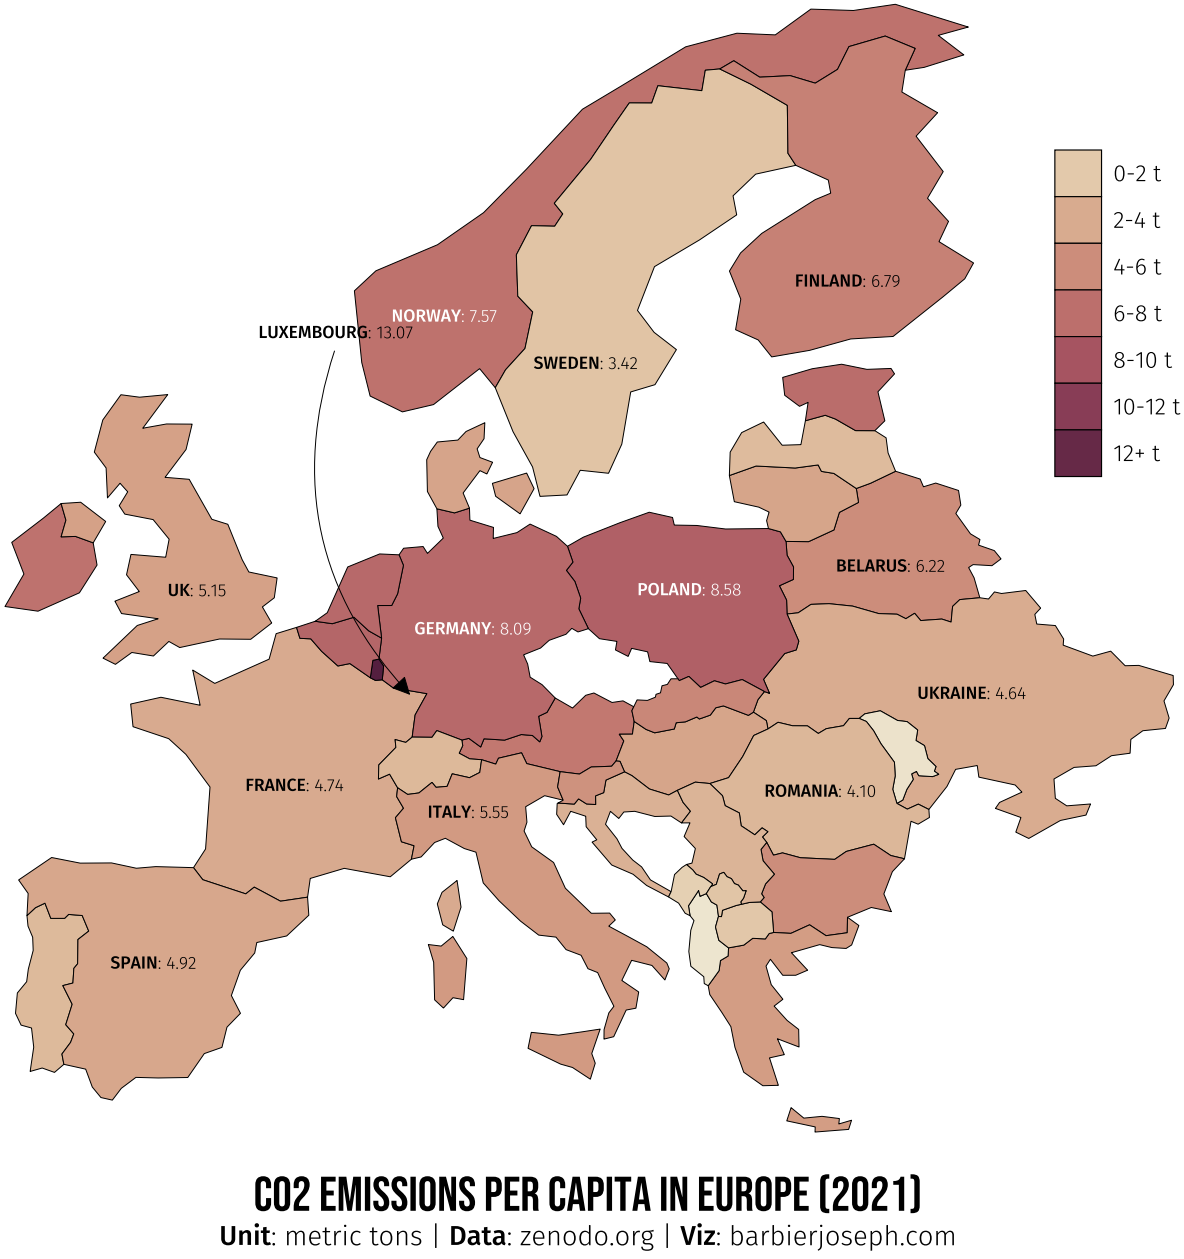

17.8.10 US, Salary

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D10_USSalary.py, and the XML code in the file D10_USSalary.2D.xml.

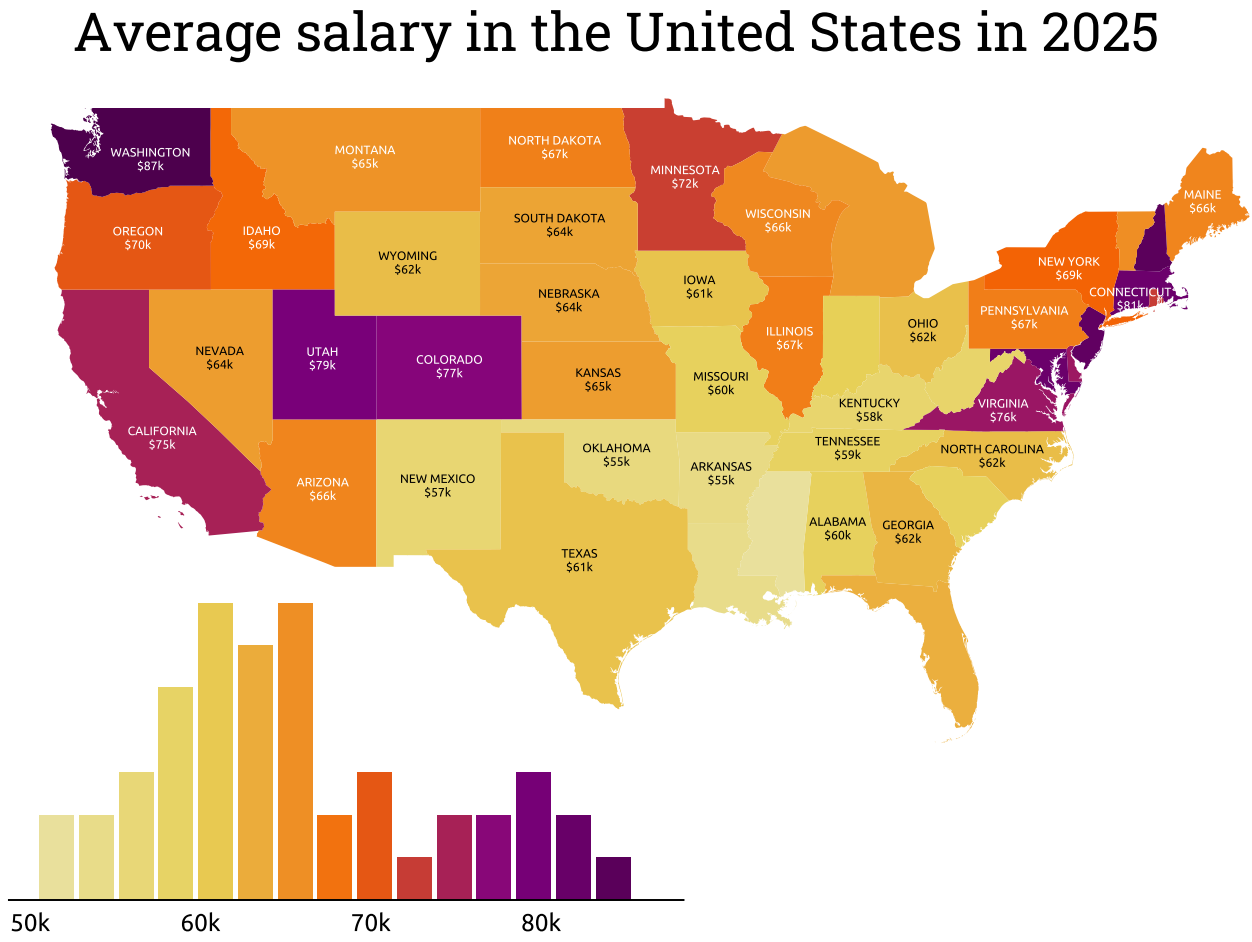

17.8.11 Belgium, unemployment

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D11_Belgium.py, and the XML code in the file D11_Belgium.2D.xml.

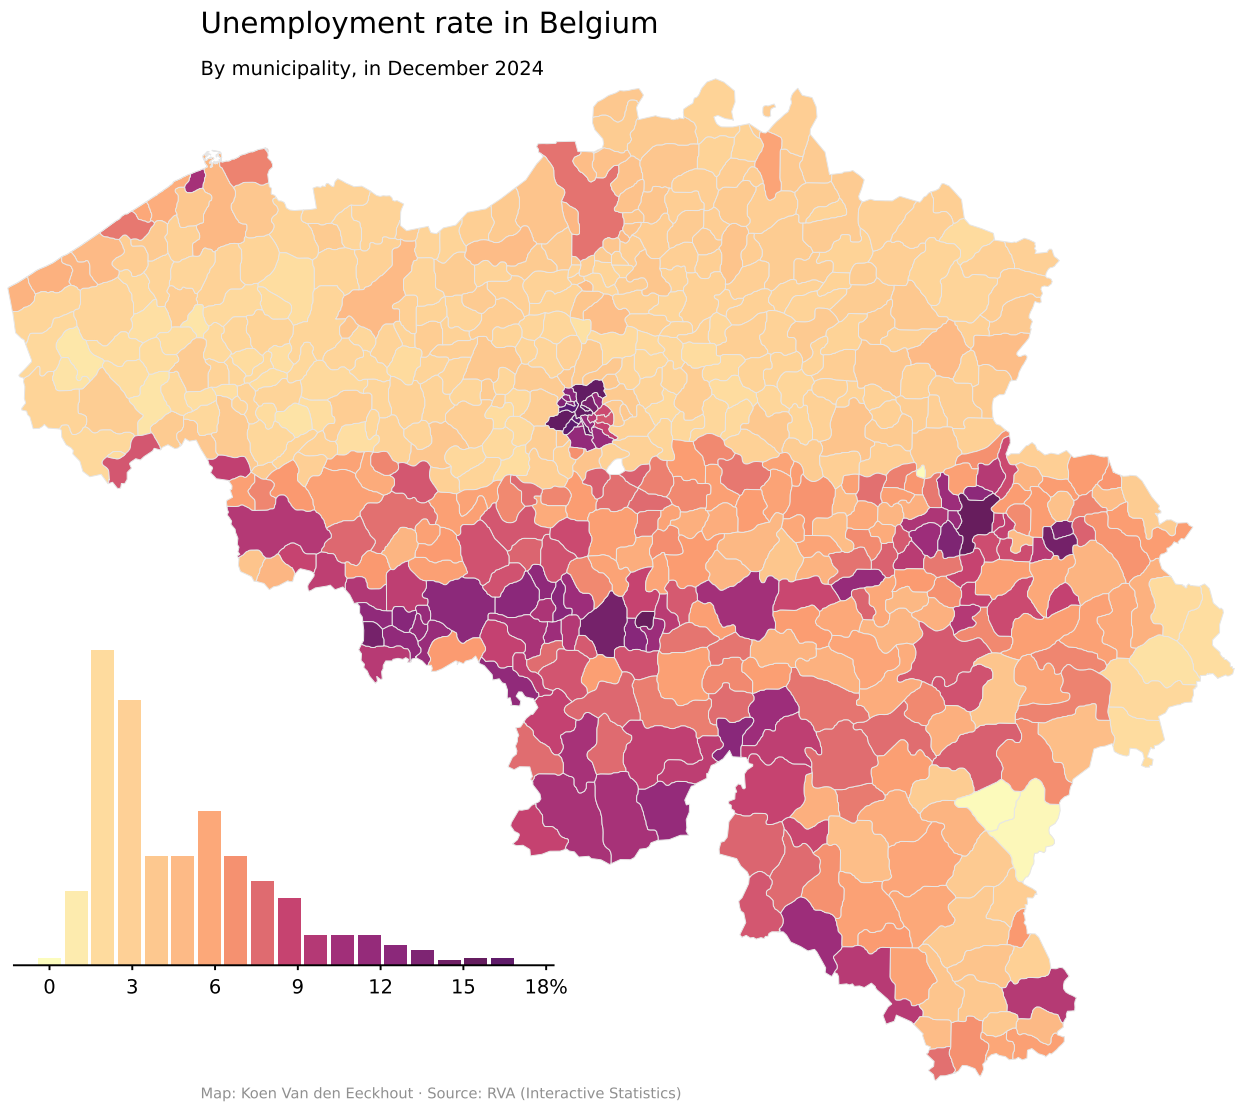

17.8.12 Earthquakes

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D12_Earthquakes.py, and the XML code in the file D12_Earthquakes.2D.xml.

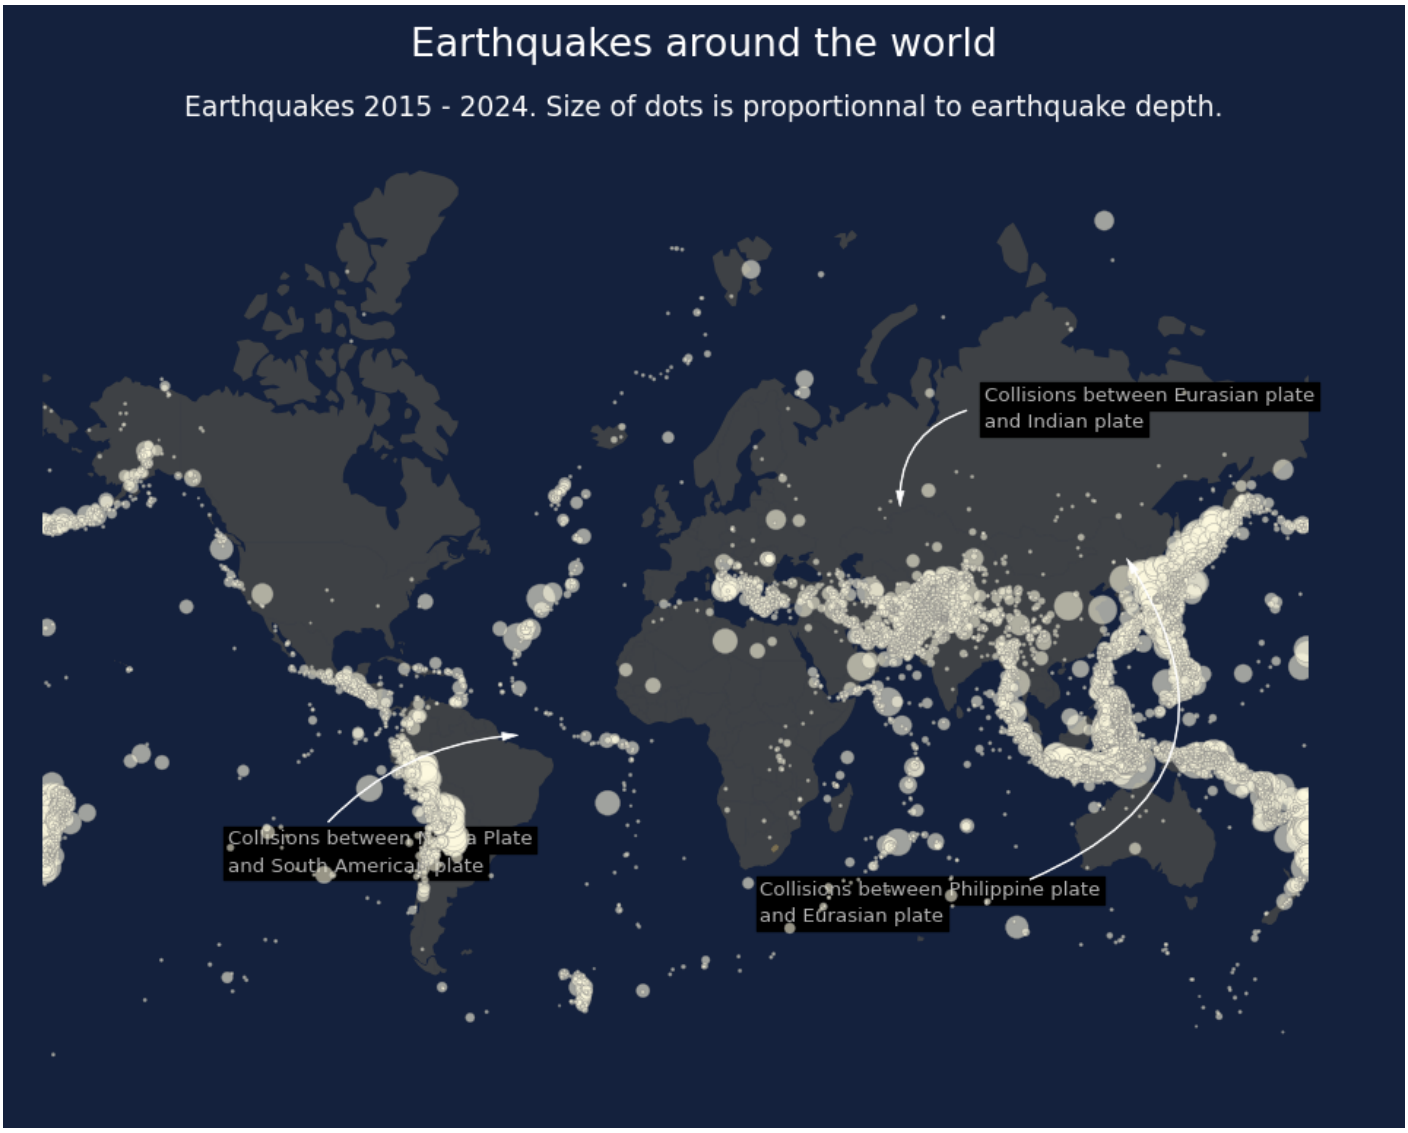

17.9 Parts of a whole

17.9.1 Waffle Chart

The Python code for the first example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01a_WaffleChart1.py, and the XML code in the file D01a_WaffleChart1.2D.xml.

The Python code for the second example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01b_WaffleChart2.py, and the XML code in the file D01b_WaffleChart2.2D.xml.

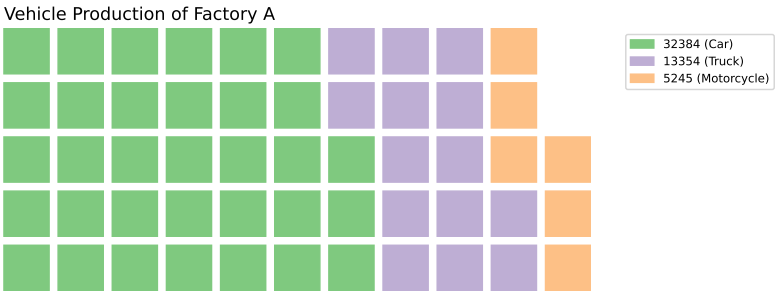

Some text

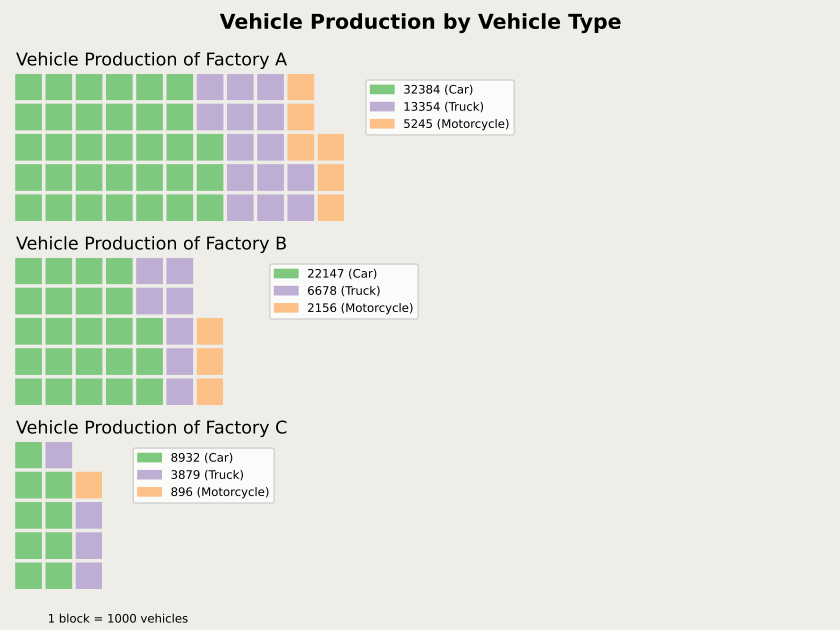

Some text

17.9.2 Pie Chart

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02_PieChart.py, and the XML code in the file D02_PieChart.2D.xml.

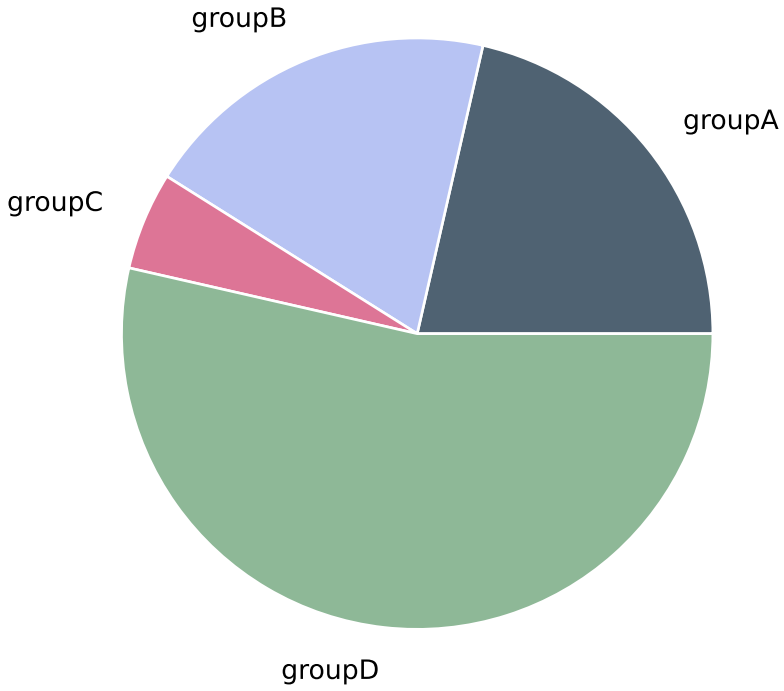

17.9.3 Donut Chart

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03_DonutChart.py, and the XML code in the file D03_DonutChart.2D.xml.

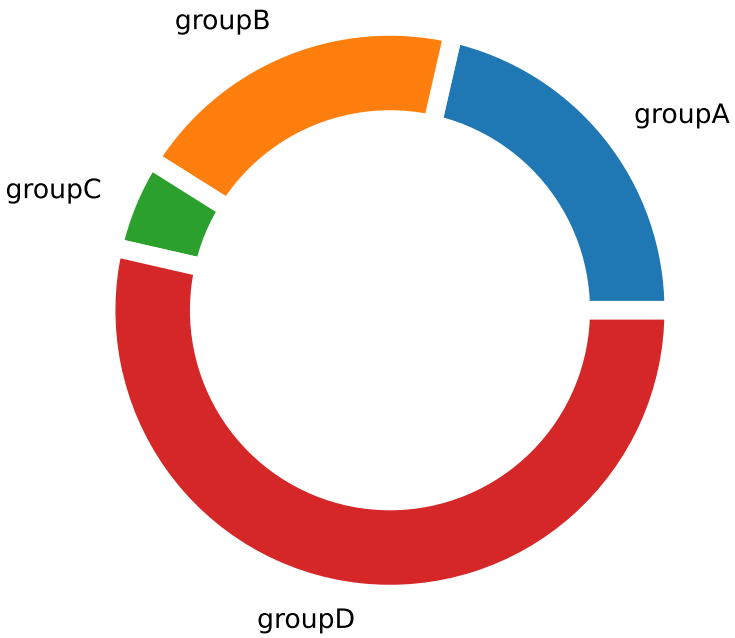

17.9.4 Radar Chart

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04_RadarChart.py, and the XML code in the file D04_RadarChart.2D.xml.

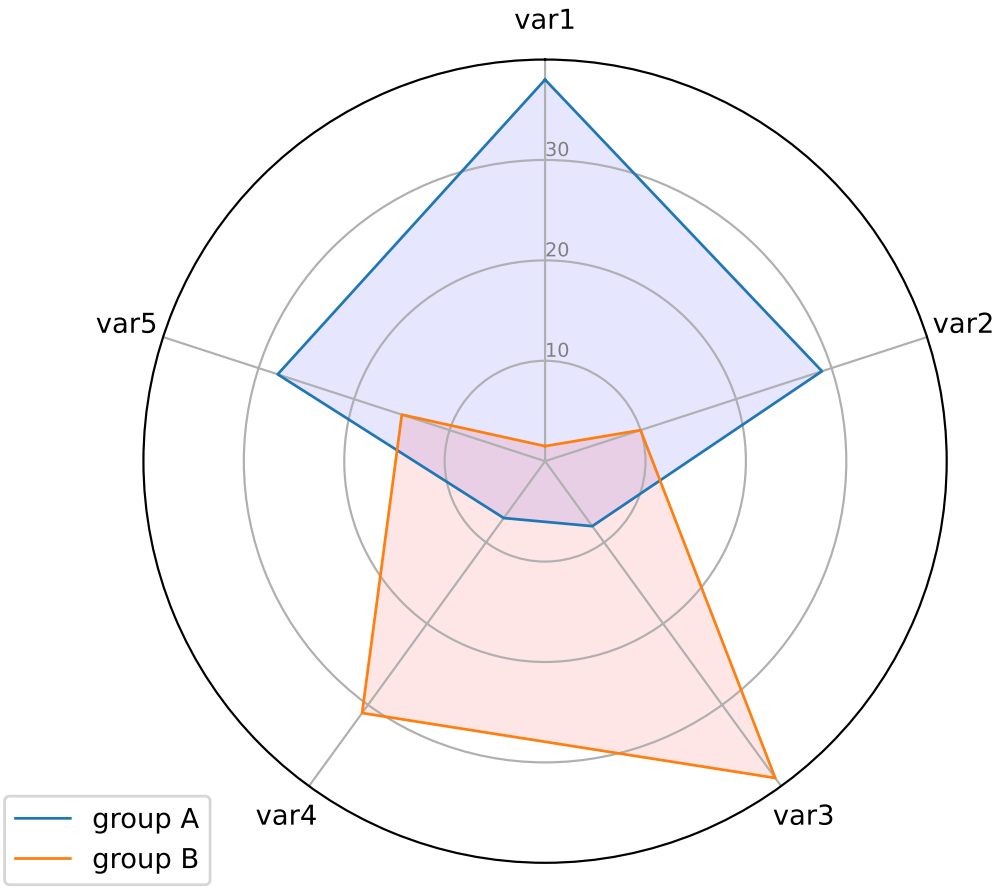

17.9.5 Venn Diagram

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05_VennDiagram.py, and the XML code in the file D05_VennDiagram.2D.xml.

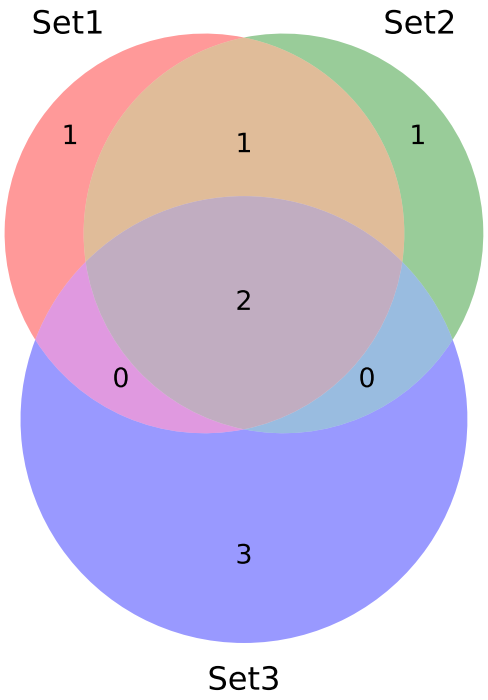

17.9.6 Treemap

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06_Treemap.py, and the XML code in the file D06_Treemap.2D.xml.

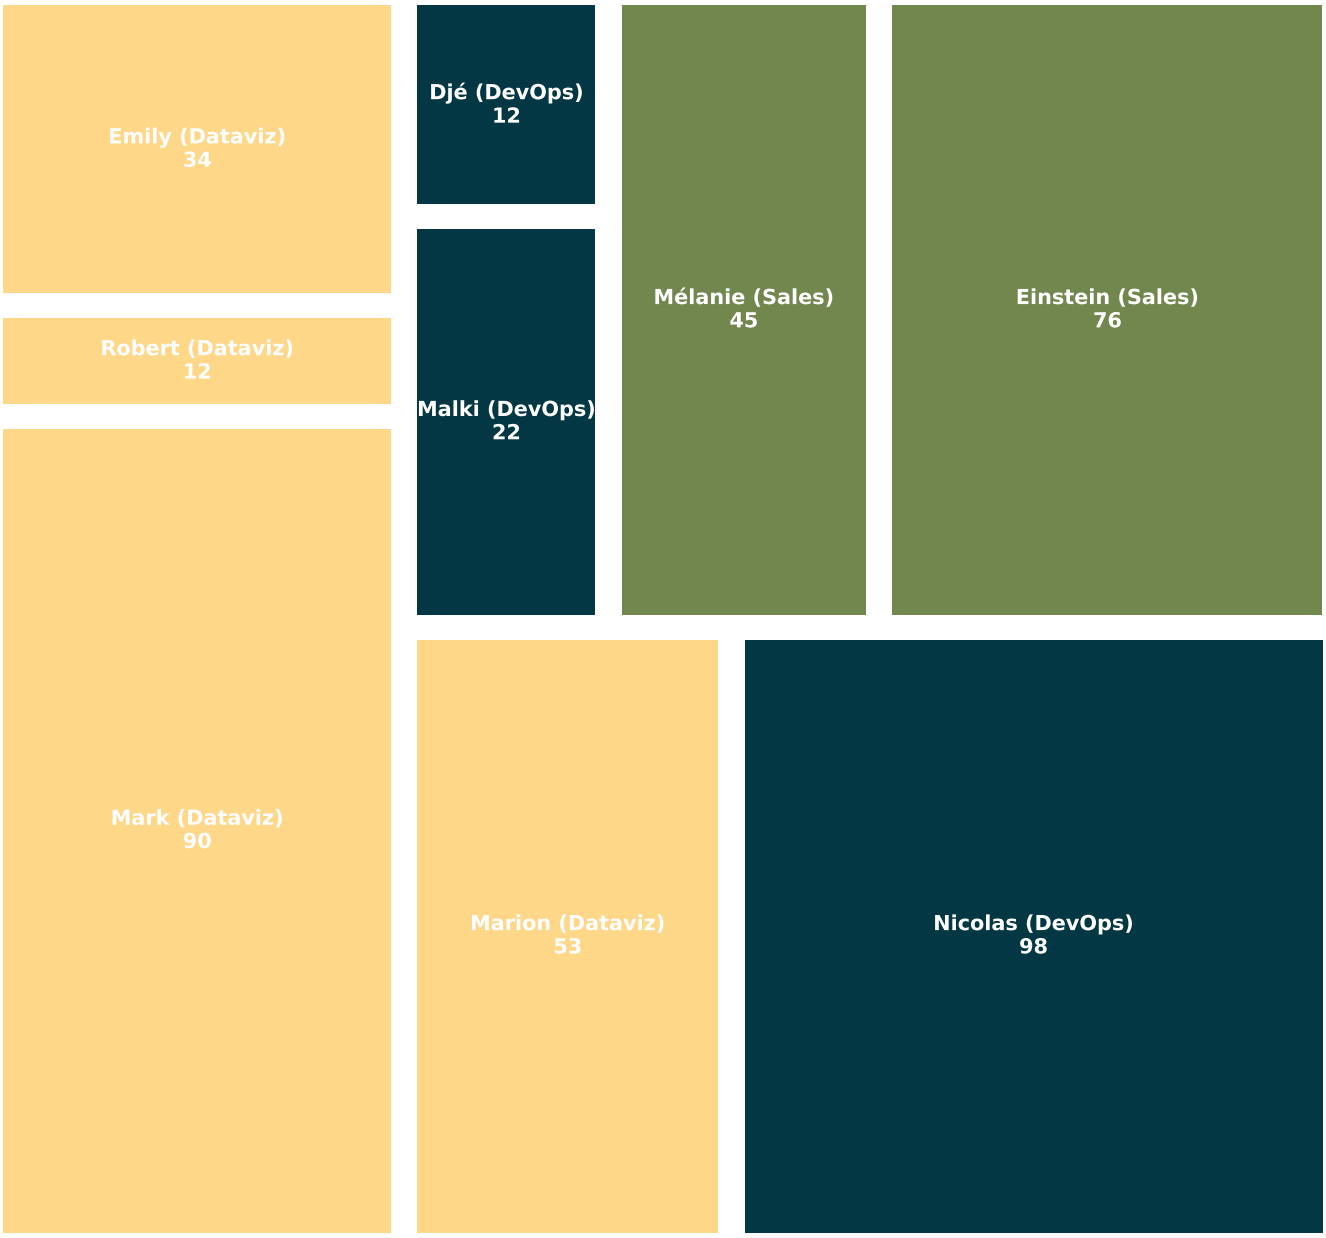

17.10 Dendrograms, heatmaps and clustermaps

17.10.1 Dendrogram

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01a_Dendrogram1.py, and the XML code in the file D01a_Dendrogram1.2D.xml.

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01b_Dendrogram2.py, and the XML code in the file D01b_Dendrogram2.2D.xml.

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01c_Dendrogram3.py, and the XML code in the file D01c_Dendrogram3.2D.xml.

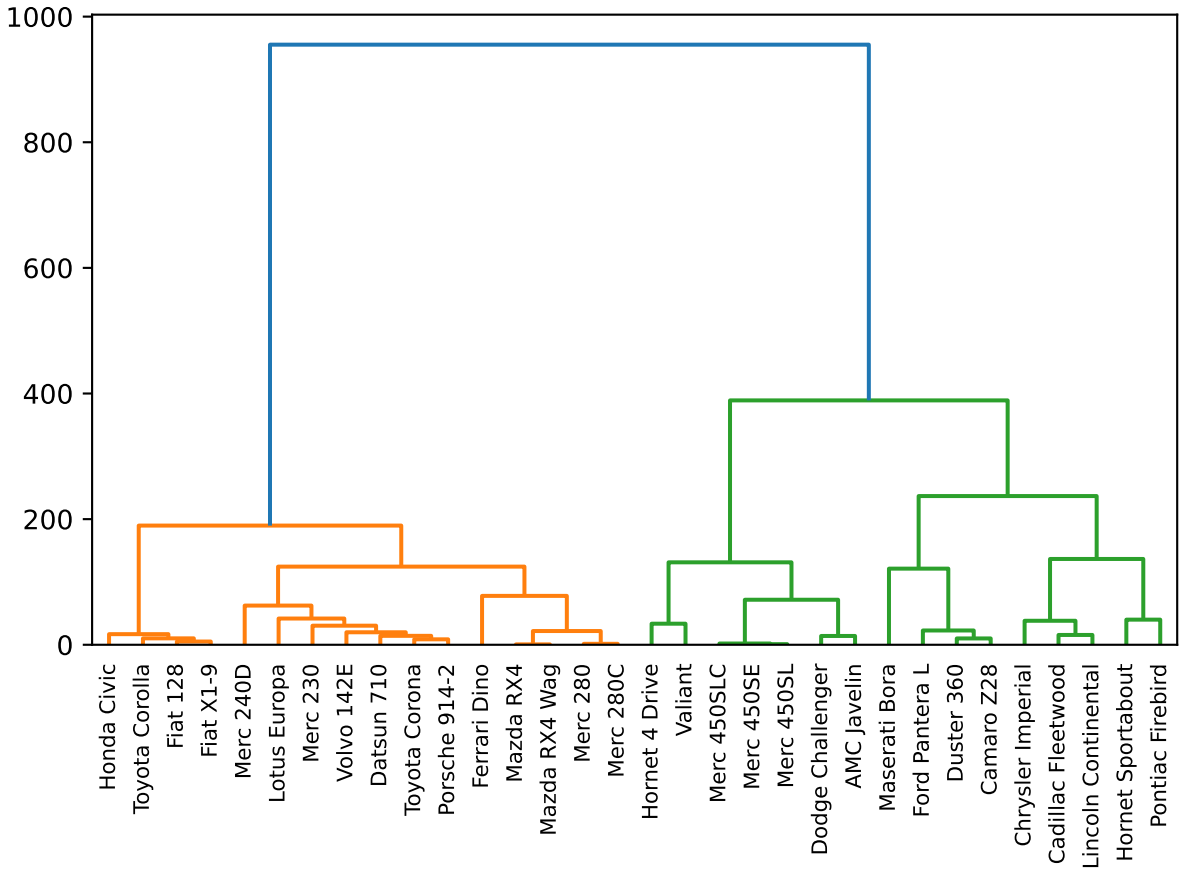

Some text

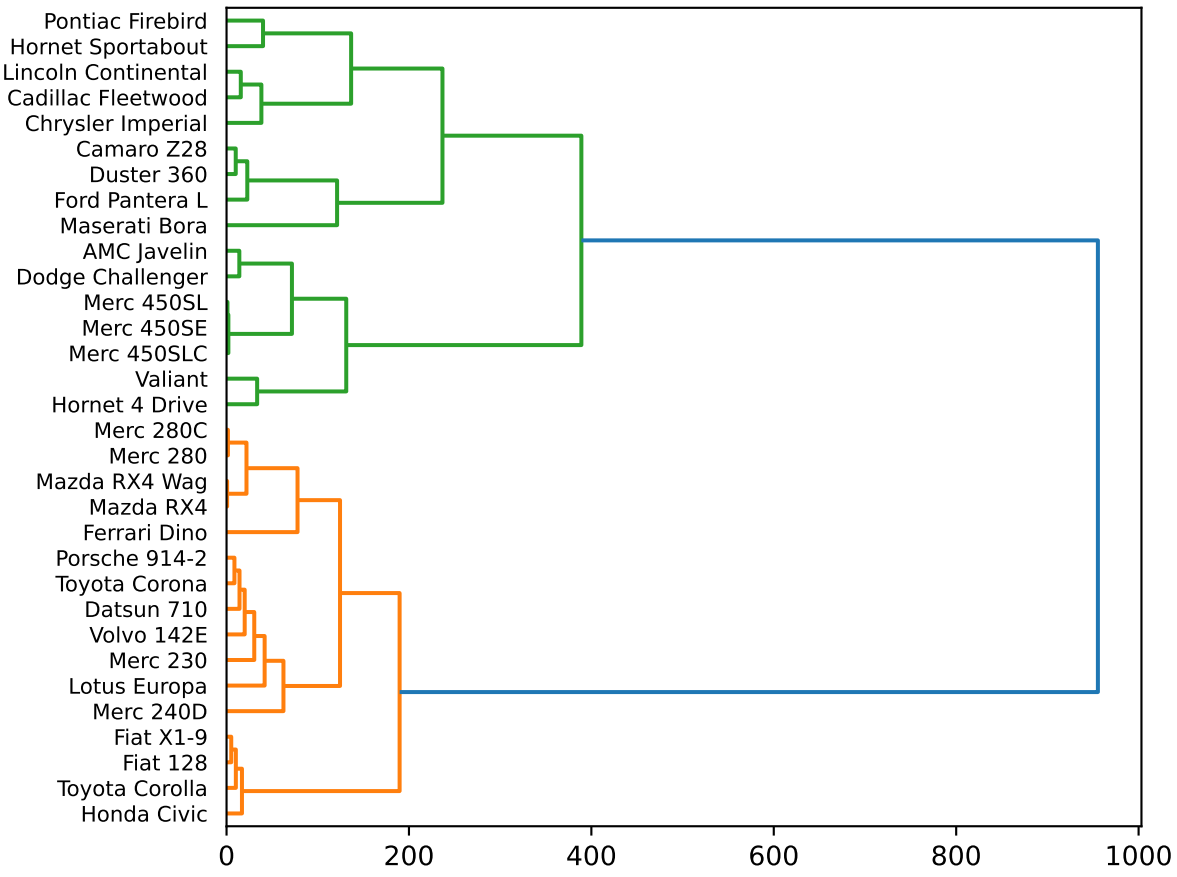
Pontiac Firebird
Hornet Sportabout
Lincoln Continental
Cadillac Fleetwood
Chrysler Imperial
Camaro Z28
Duster 360
Ford Pantera L
Maserati Bora
AMC Javelin
Dodge Challenger
Merc 450SL
Merc 450SE
Merc 450SLC
Valiant
Hornet 4 Drive
Merc 280C
Merc 280
Mazda RX4 Wag
Mazda RX4
Ferrari Dino
Porsche 914-2
Toyota Corona
Datsun 710
Volvo 142E
Merc 230
Lotus Europa
Merc 240D
Fiat X1-9
Fiat 128
Toyota Corolla
Honda Civic
0
200
400
600
800
1000

Some text

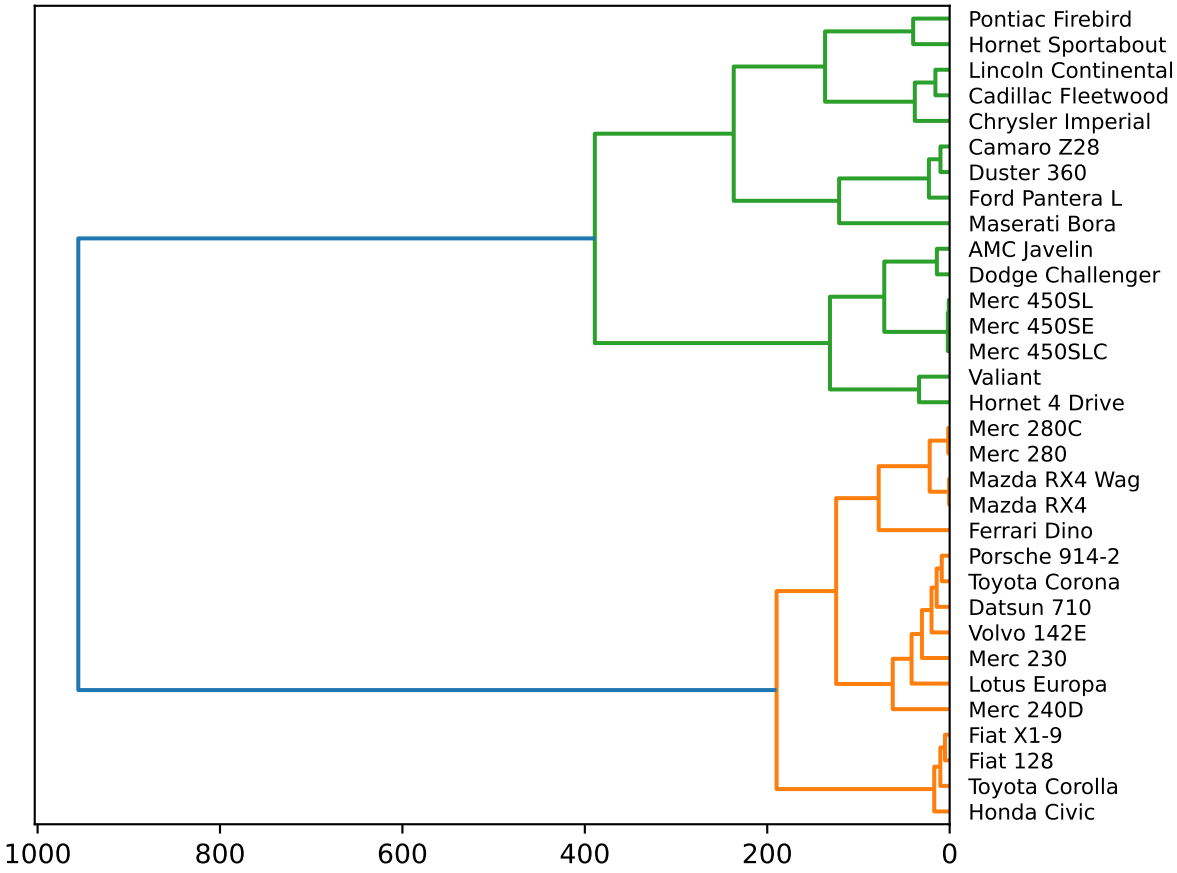
Pontiac Firebird
Hornet Sportabout
Lincoln Continental
Cadillac Fleetwood
Chrysler Imperial
Camaro Z28
Duster 360
Ford Pantera L
Maserati Bora
AMC Javelin
Dodge Challenger
Merc 450SL
Merc 450SE
Merc 450SLC
Valiant
Hornet 4 Drive
Merc 280C
Merc 280
Mazda RX4 Wag
Mazda RX4
Ferrari Dino
Porsche 914-2
Toyota Corona
Datsun 710
Volvo 142E
Merc 230
Lotus Europa
Merc 240D
Fiat X1-9
Fiat 128
Toyota Corolla
Honda Civic
1000
800
600
400
200
0

17.10.2 Heatmap, simple

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02_Heatmap1.py, and the XML code in the file D02_Heatmap1.2D.xml.

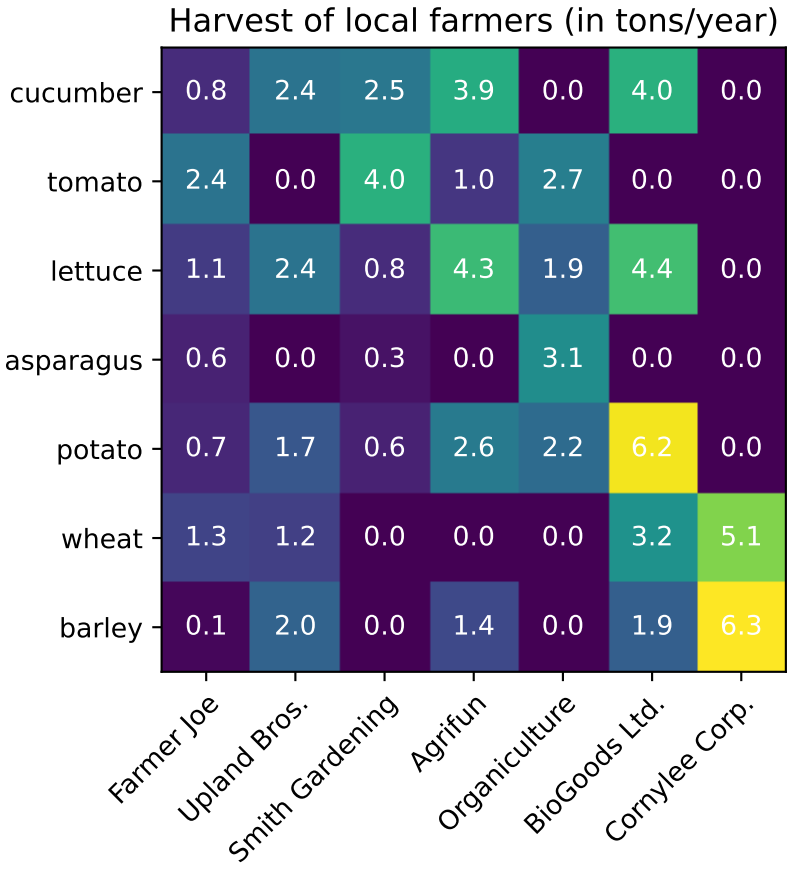

17.10.3 Heatmap, complex

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03_Heatmap2.py, and the XML code in the file D03_Heatmap2.2D.xml.

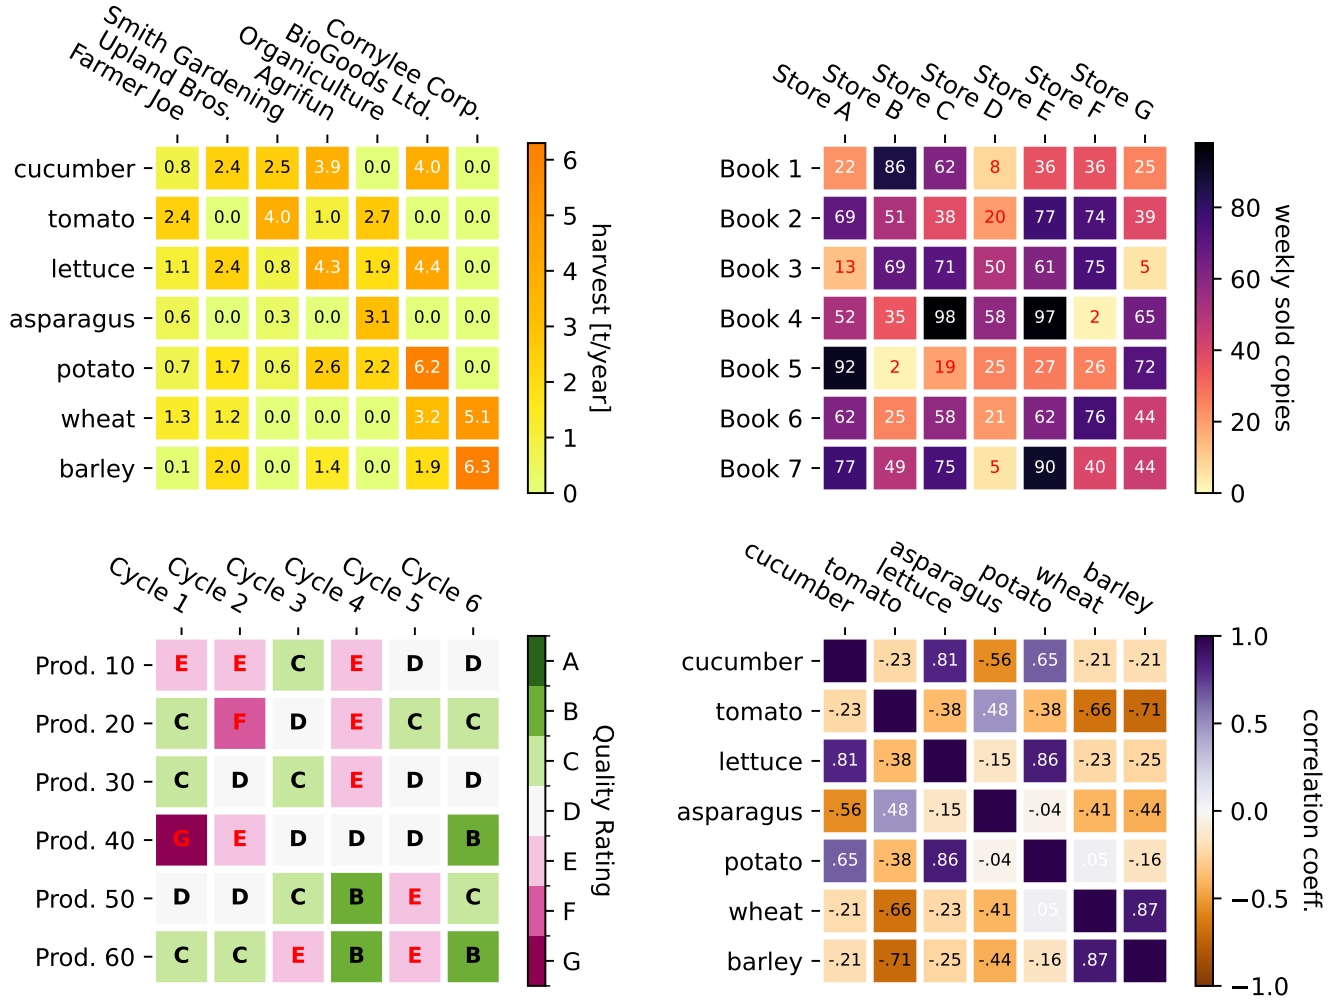

17.10.4 Matshow

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04_MatShow.py, and the XML code in the file D04_MatShow.2D.xml.

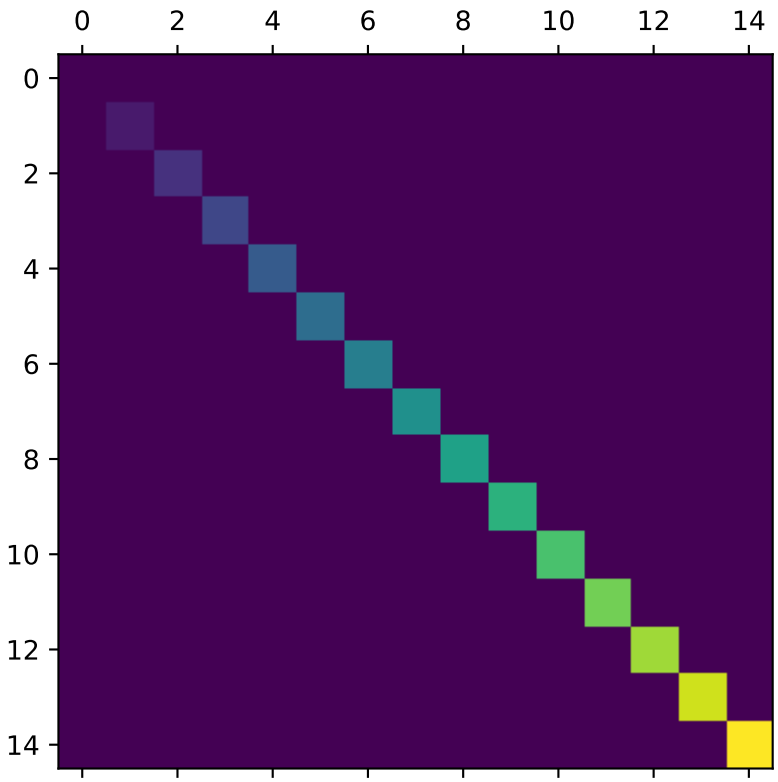

17.10.5 Many pairwise correlations (Seaborn)

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05_ManyPairwiseCorrelations.py, and the XML code in the file D05_ManyPairwiseCorrelations.2D.xml.

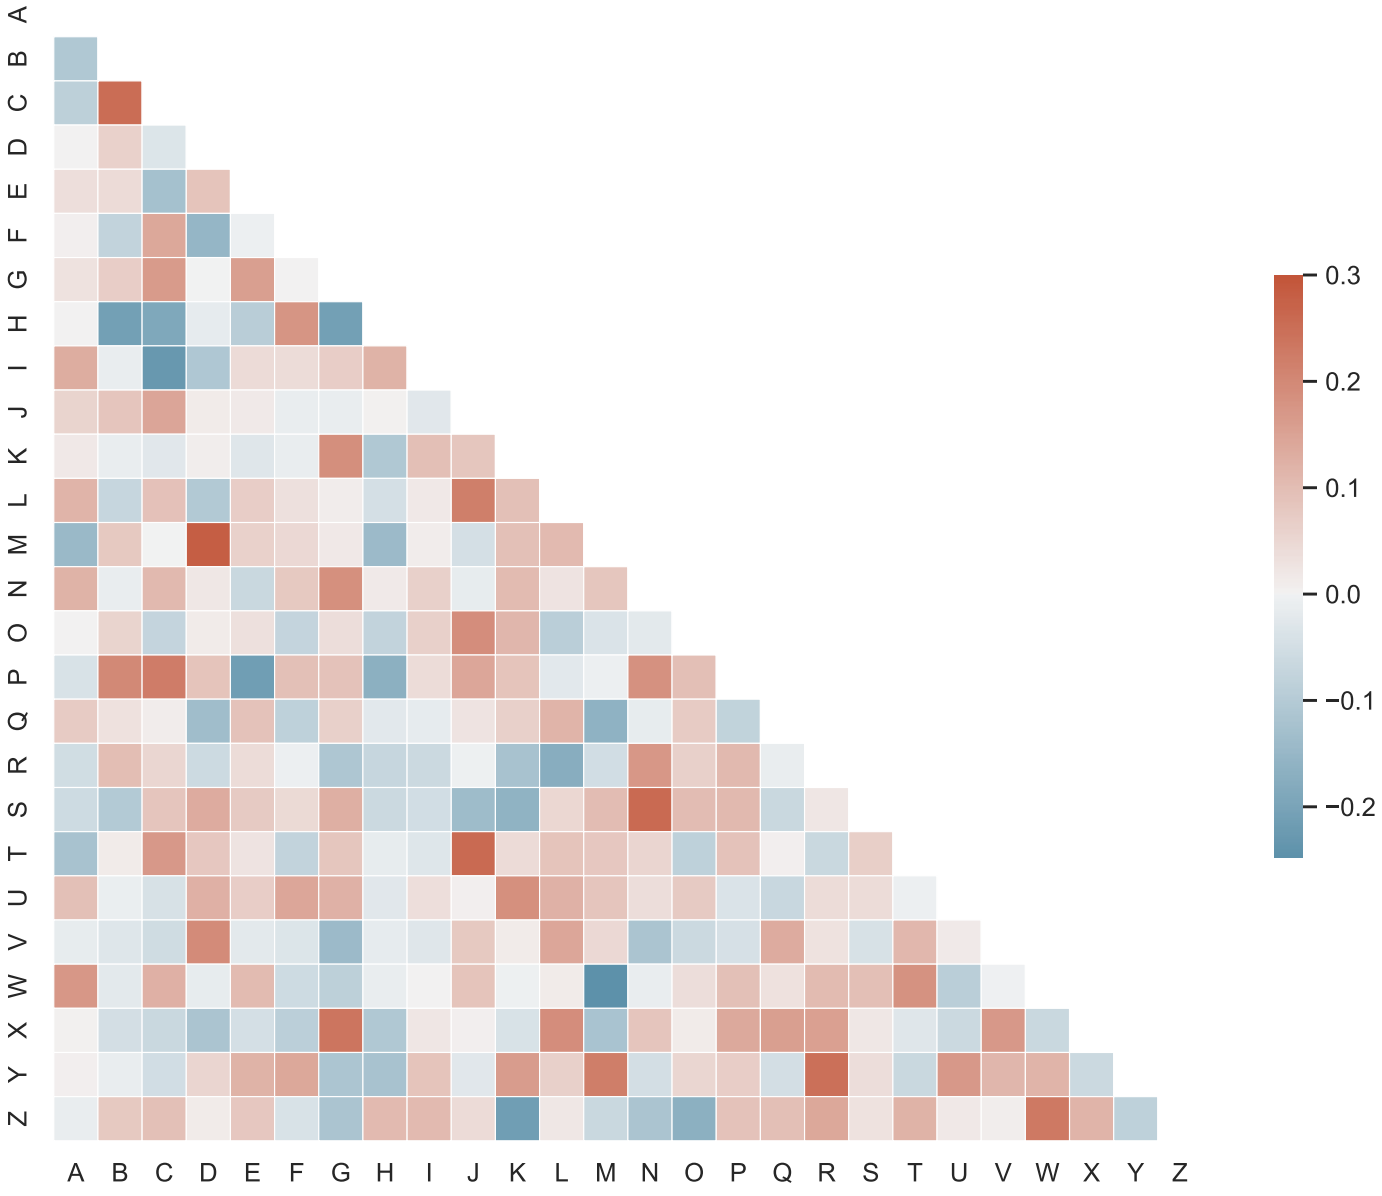

17.10.6 Structured heatmap (Seaborn)

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06_StructuredHeatmap.py, and the XML code in the file D06_StructuredHeatmap.2D.xml.

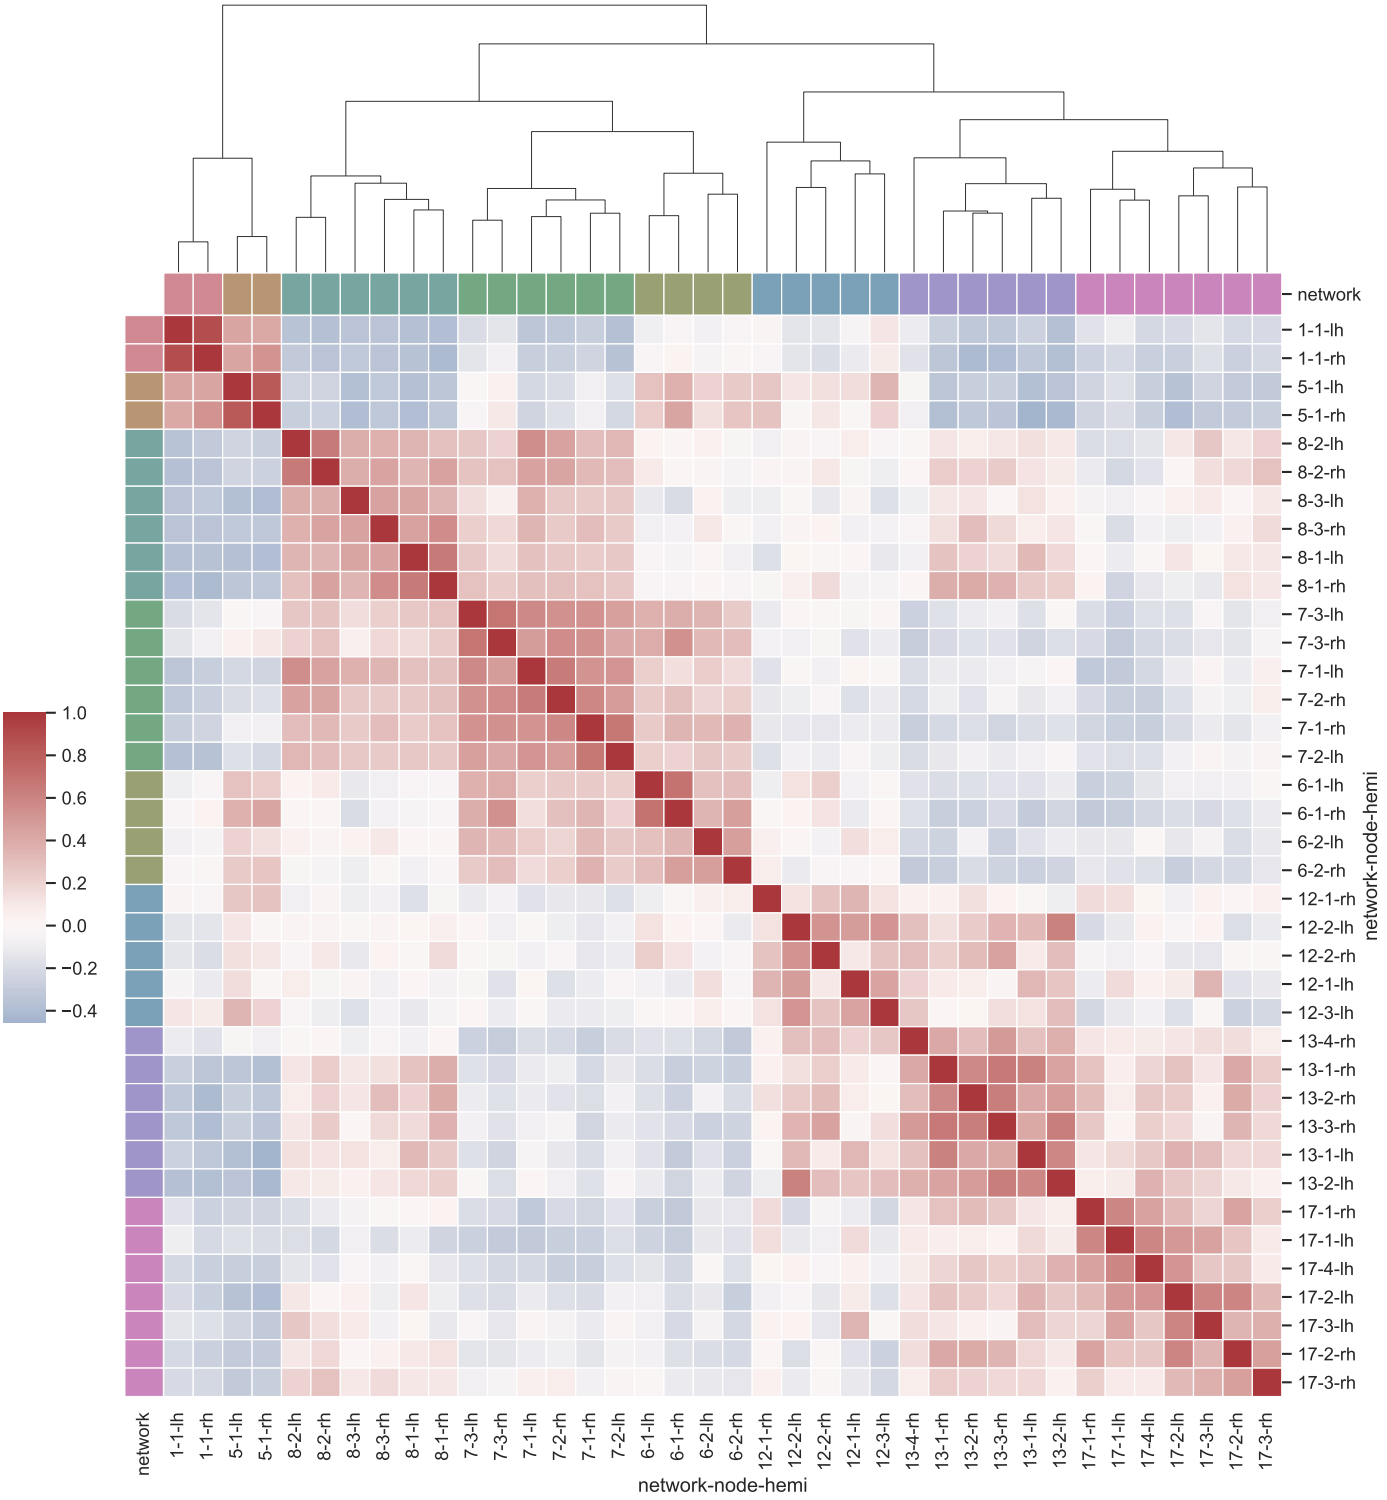

17.10.7 Clustermap (Seaborn)

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07_Clustermap.py, and the XML code in the file D07_Clustermap.2D.xml.

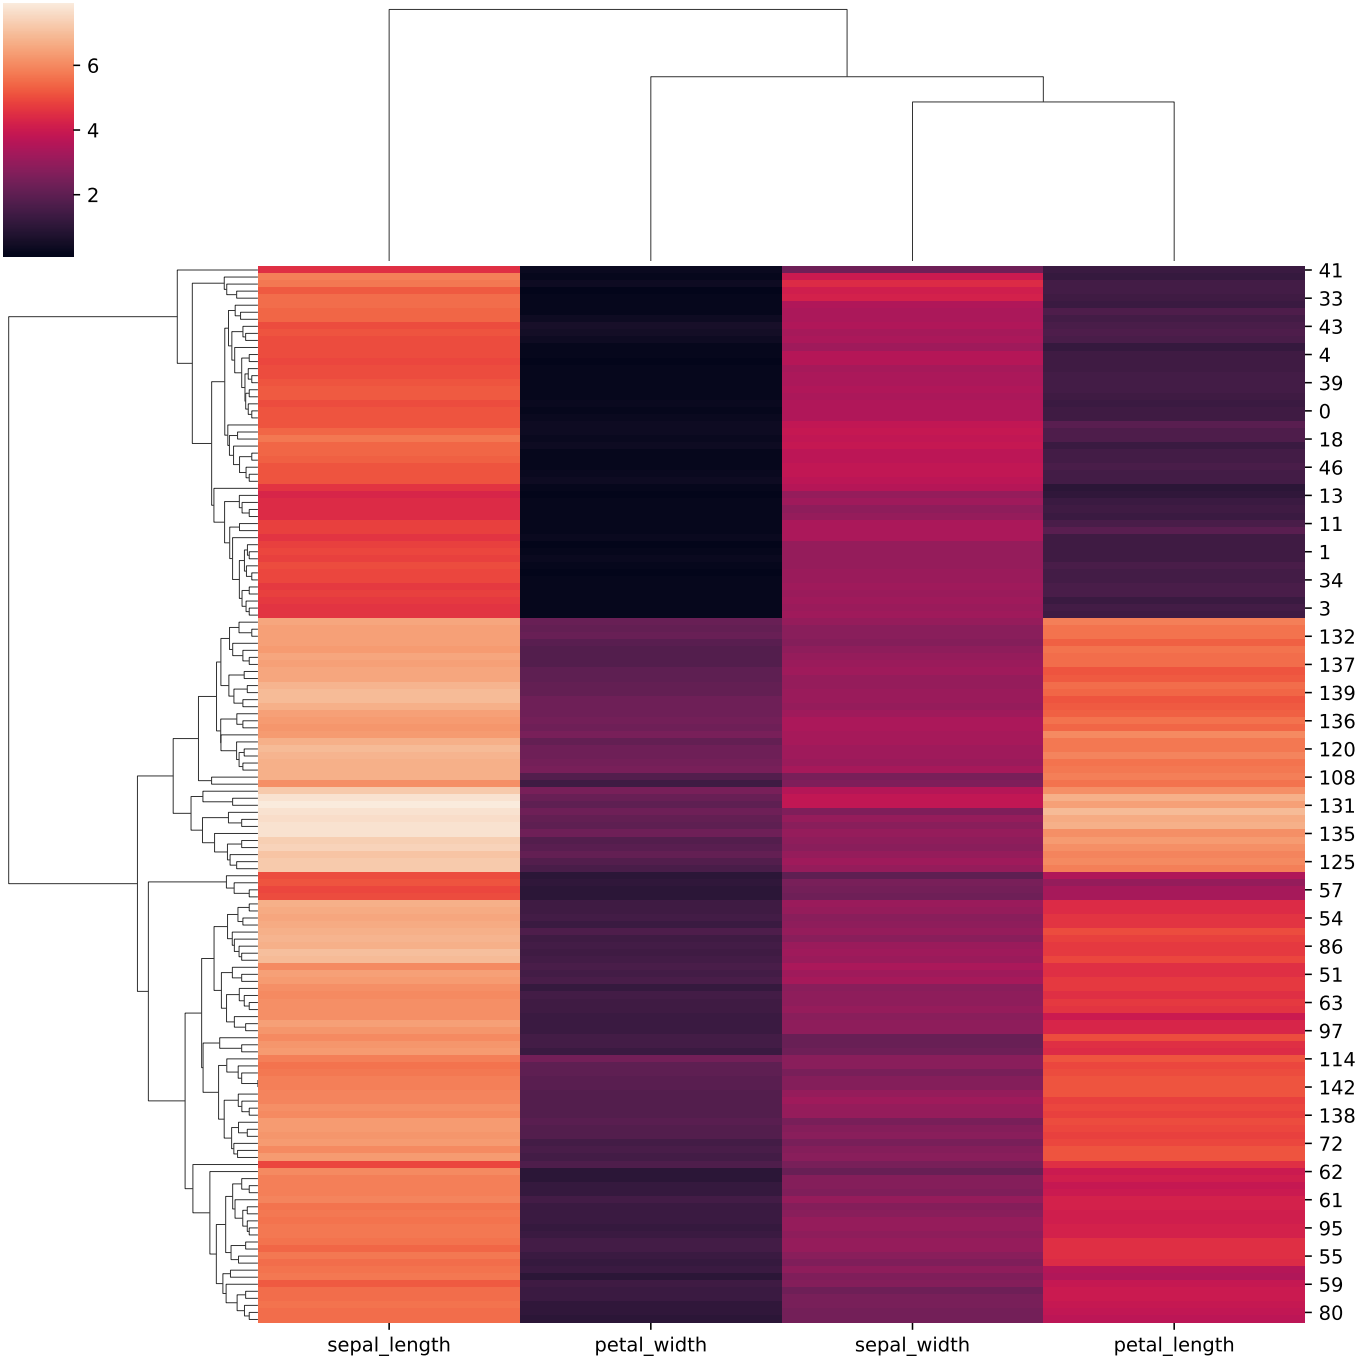

see: https://seaborn.pydata.org/generated/seaborn.clustermap.html

17.11 PlotTable

17.11.1 PlotTable1

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_PlotTable1.py, and the XML code in the file D01_PlotTable1.2D.xml.

index	A	B	C	D	E
0	0.03	0.23	0.61	0.9	0.08
1	0.16	0.53	0.33	0.62	0.28
2	0.31	0.37	0.01	0.0	0.3
3	0.88	0.43	0.31	0.49	0.58
4	0.57	0.73	0.32	0.89	0.31

17.11.2 PlotTable2

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02_PlotTable2.py, and the XML code in the file D02_PlotTable2.2D.xml.

		Team Rating			Group Stage Chances			Knockout Stage Chances				
Team	Group	SPI	OFF	DEF	1st Place	2nd Place	3rd Place	Make Rd Of 16	Make Quarters	Make Semis	Make Finals	Win World Cup
USA	F	98.3	5.5	0.6	83%	17%	-	✓	78%	47%	35%	24%
France	A	96.3	4.3	0.5	>99%	<1%	<1%	✓	78%	42%	30%	19%
Germany	B	93.8	4.0	0.7	98%	2%	-	✓	89%	48%	28%	12%
Canada	E	93.5	3.7	0.6	39%	61%	-	✓	59%	36%	20%	9%
England	D	91.9	3.5	0.6	71%	29%	-	✓	69%	43%	16%	8%
Netherlands	E	92.7	3.9	0.7	61%	39%	-	✓	59%	37%	19%	8%
Australia	C	92.8	4.2	0.9	13%	54%	34%	>99%	54%	26%	10%	5%
Sweden	F	88.4	3.0	0.6	17%	83%	-	✓	47%	20%	10%	4%
Japan	D	90.3	3.8	0.9	29%	63%	8%	✓	46%	27%	9%	4%
Brazil	C	89.5	3.6	0.9	26%	22%	52%	>99%	43%	17%	7%	3%
Spain	B	86.5	3.1	0.8	1%	70%	29%	>99%	31%	11%	5%	2%
Norway	A	83.7	3.0	0.9	<1%	94%	5%	>99%	44%	18%	4%	2%
China	B	82.7	2.7	0.8	<1%	29%	70%	93%	34%	11%	3%	<1%
Italy	C	76.1	3.0	1.3	61%	24%	15%	✓	37%	9%	2%	<1%
New Zealand	E	77.6	2.8	1.2	-	-	48%	40%	10%	4%	<1%	<1%
Nigeria	A	71.7	2.4	1.1	<1%	5%	91%	50%	13%	3%	<1%	<1%
Cameroon	E	65.8	2.1	1.2	-	-	52%	23%	4%	1%	<1%	<1%
South Korea	A	76.4	2.7	1.1	-	<1%	4%	2%	<1%	<1%	<1%	<1%
Scotland	D	54.0	2.0	1.7	-	-	53%	52%	3%	<1%	<1%	<1%
Argentina	D	39.2	1.5	1.9	-	8%	40%	25%	<1%	<1%	<1%	<1%
Chile	F	46.5	1.8	1.8	-	-	66%	15%	<1%	<1%	<1%	-
South Africa	B	56.7	1.7	1.3	-	-	<1%	<1%	<1%	<1%	<1%	-
Thailand	F	40.7	2.0	2.4	-	-	34%	2%	<1%	<1%	-	-
Jamaica	C	53.5	2.5	2.1	-	-	<1%	<1%	<1%	-	-	-

17.11.3 PlotTable3

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03_PlotTable3.py, and the XML code in the file D03_PlotTable3.2D.xml.

		Games	W	D	L	Goals		Points
1	Bayern Munich	15	10	4	1	49:13	+36	34
2	RB Leipzig	15	8	4	3	30:21	+9	28
3	1. FC Union Berlin	14	8	3	3	23:16	+7	27
4	SC Freiburg	14	8	3	3	21:16	+5	27
5	Eintracht Frankfurt	15	8	2	4	31:23	+8	26
6	Borussia Dortmund	15	8	1	6	25:21	+4	25
7	VfL Wolfsburg	15	6	5	4	24:20	+4	23
8	Borussia Monchengladbach	14	6	4	5	28:24	+4	22
9	Werder Bremen	15	6	3	6	25:27	-2	21
10	TSG Hoffenheim	15	5	3	7	22:22	+0	18
11	Bayer Leverkusen	15	5	3	7	25:26	-1	18
12	Mainz	14	5	3	6	18:23	-5	18
13	FC Cologne	15	4	5	6	21:29	-8	17
14	FC Augsburg	15	4	3	8	18:26	-8	15
15	Hertha Berlin	15	3	5	7	19:22	-3	14
16	VfB Stuttgart	15	3	5	7	18:27	-9	14
17	VfL Bochum	15	4	1	10	14:36	-22	13
18	Schalke 04	15	2	3	10	13:32	-19	9

17.11.4 PlotTable4

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04_PlotTable4.py, and the XML code in the file D04_PlotTable4.2D.xml.

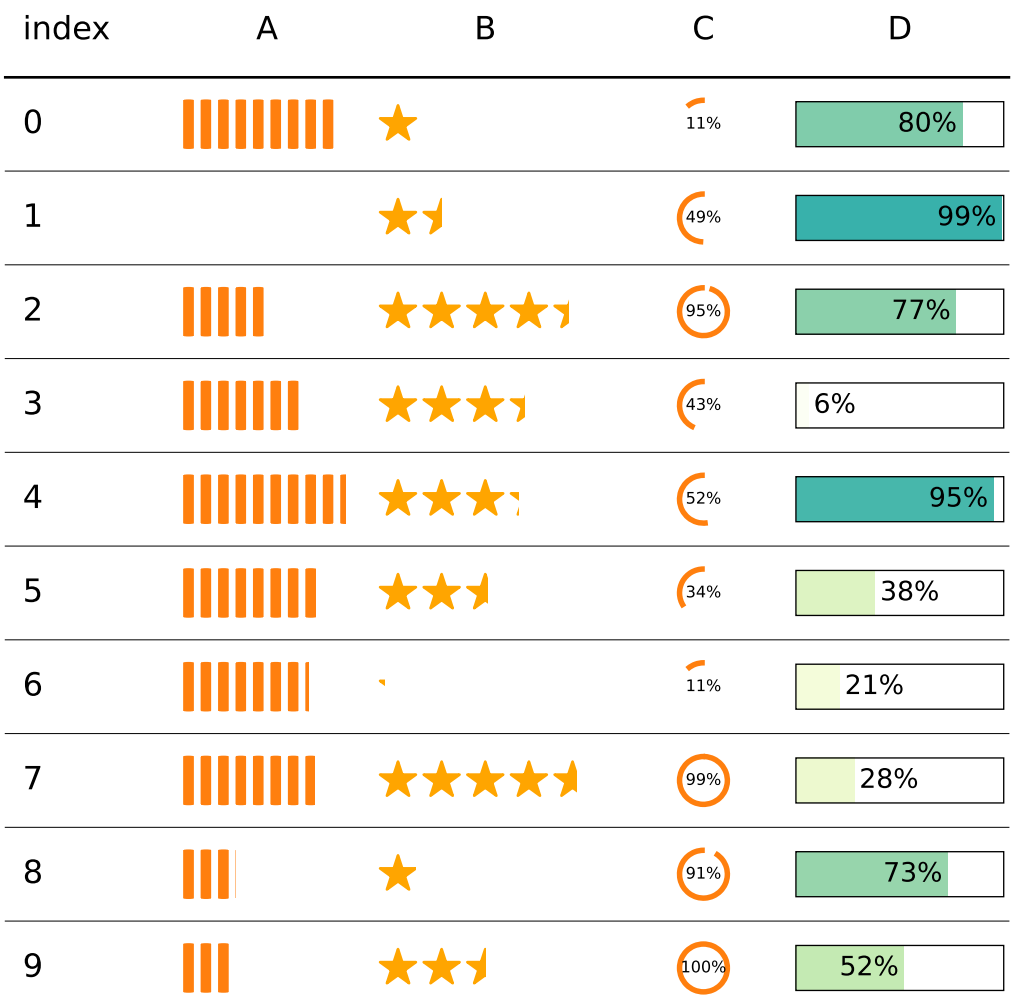

17.11.5 PlotTable5

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05_PlotTable5.py, and the XML code in the file D05_PlotTable5.2D.xml.

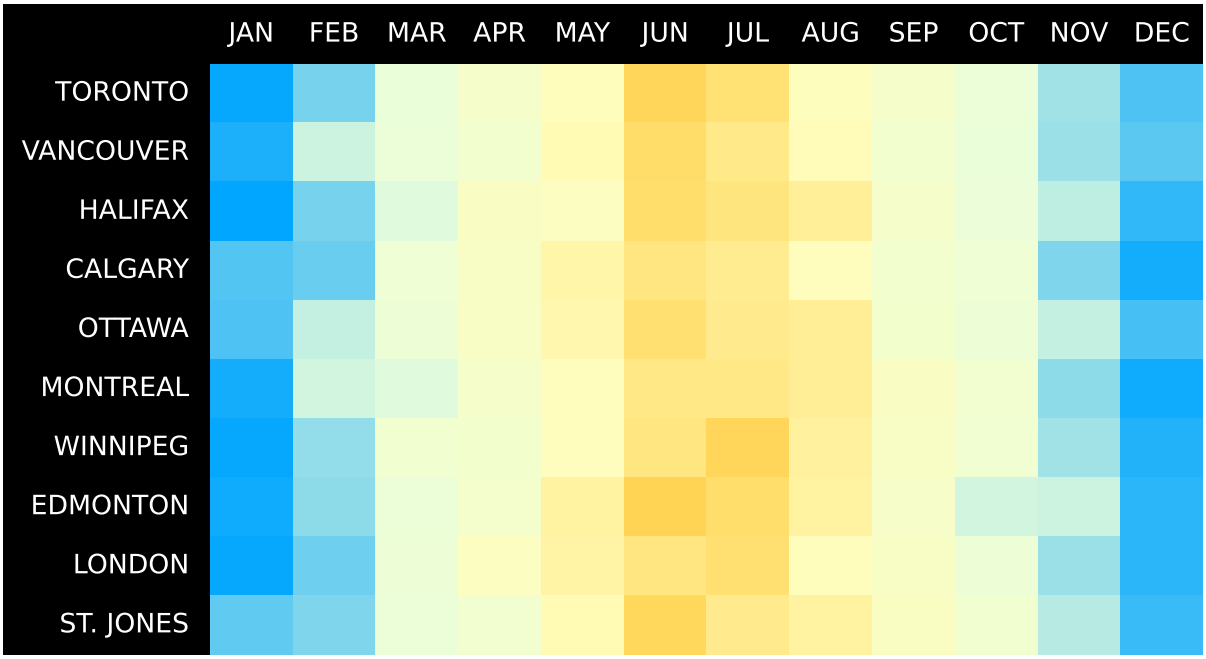

17.12 Flow and connections

17.12.1 Sankey Default

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_Sankey_Default.py, and the XML code in the file D01_Sankey_Default.2D.xml.

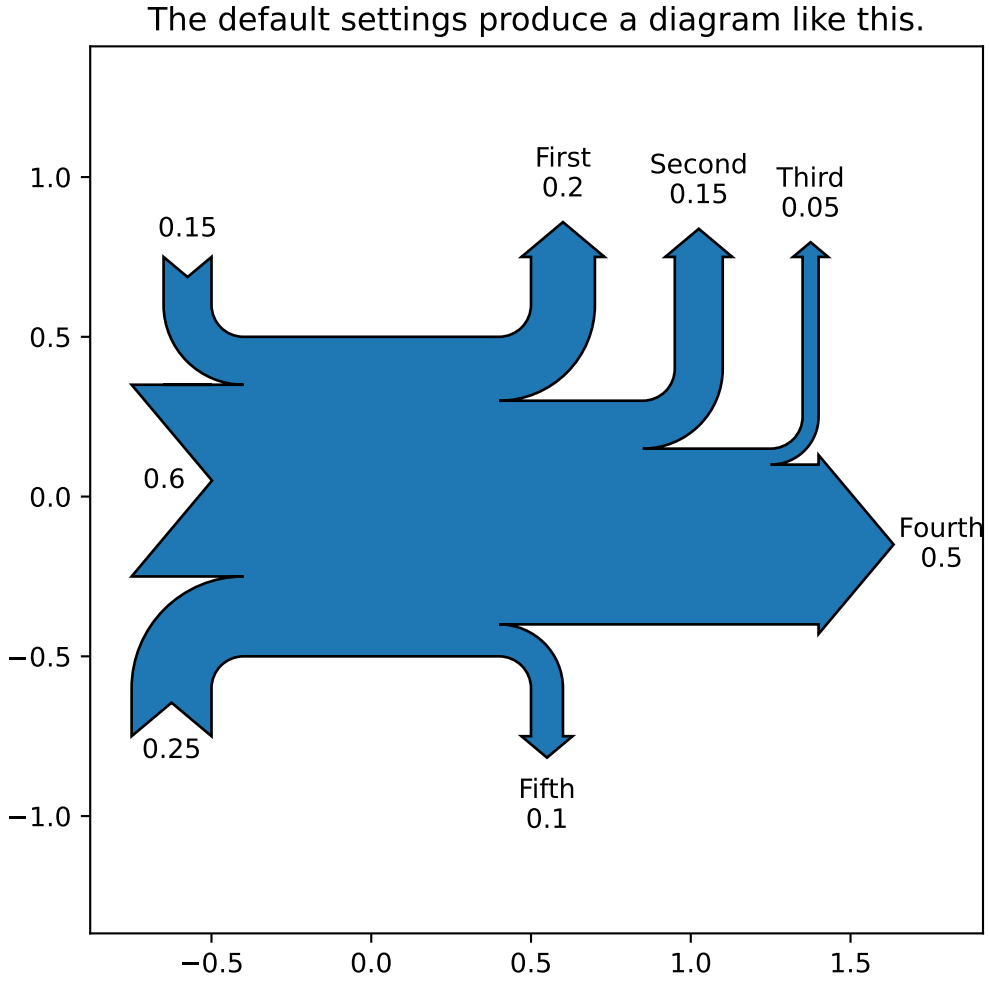

17.12.2 Sankey 2 Systems

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02_Sankey_TwoSystems.py, and the XML code in the file D02_Sankey_TwoSystems.2D.xml.

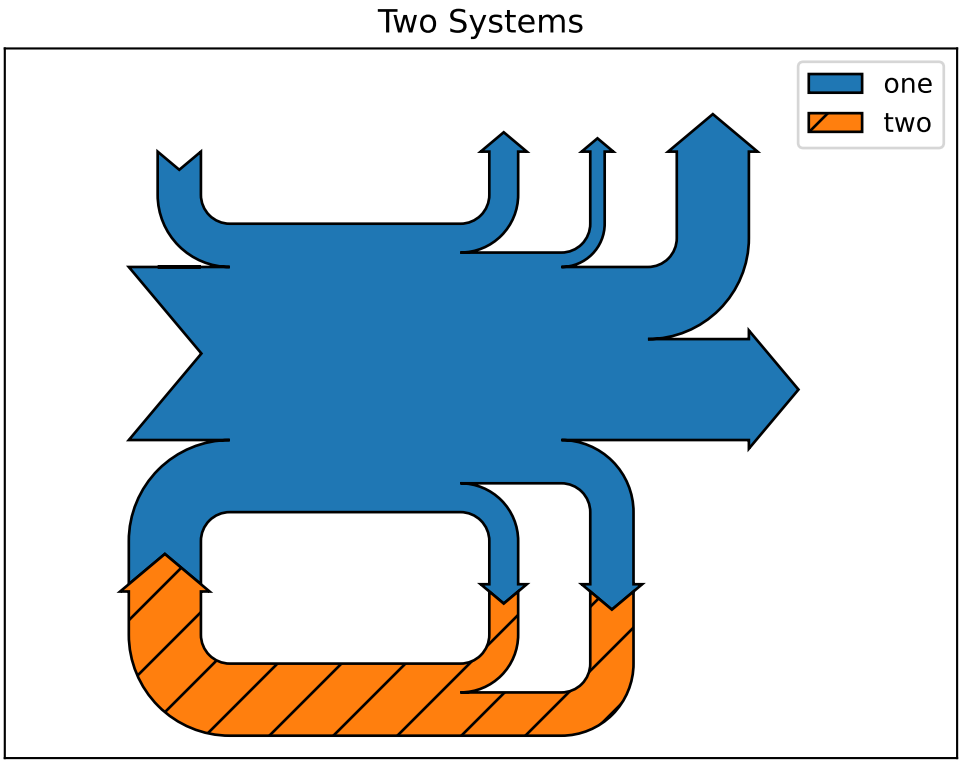

17.12.3 Sankey Rankine

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03_Sankey_Rankine.py, and the XML code in the file D03_Sankey_Rankine.2D.xml.

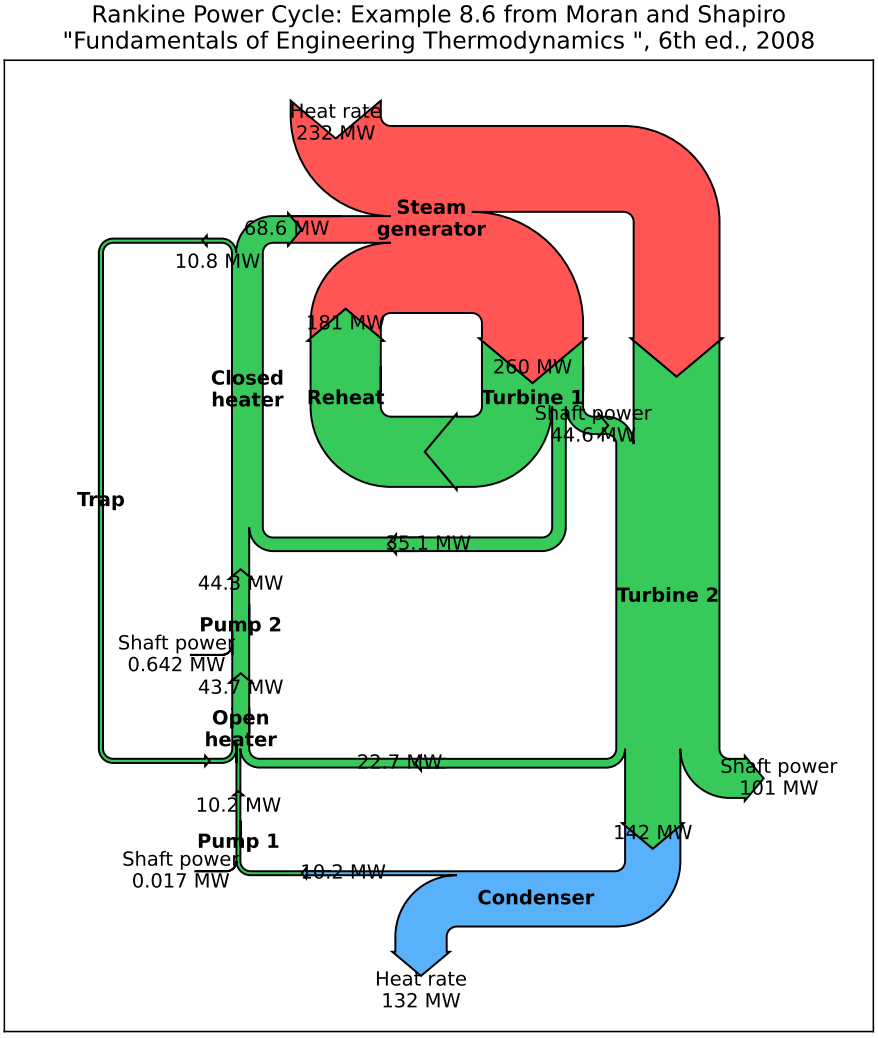

17.12.4 Sankey One 2 one

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04_Sankey_One2one.py, and the XML code in the file D04_Sankey_One2one.2D.xml.

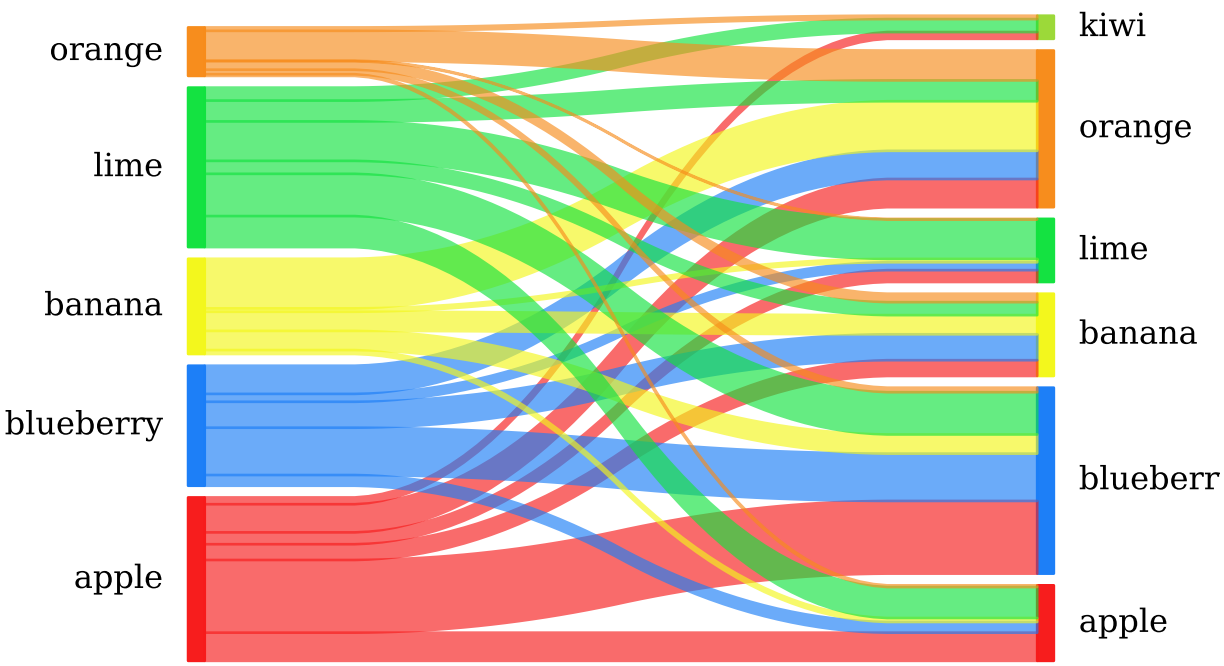

17.12.5 Sankey Flow

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05_SankeyFlow.py, and the XML code in the file D05_SankeyFlow.2D.xml.

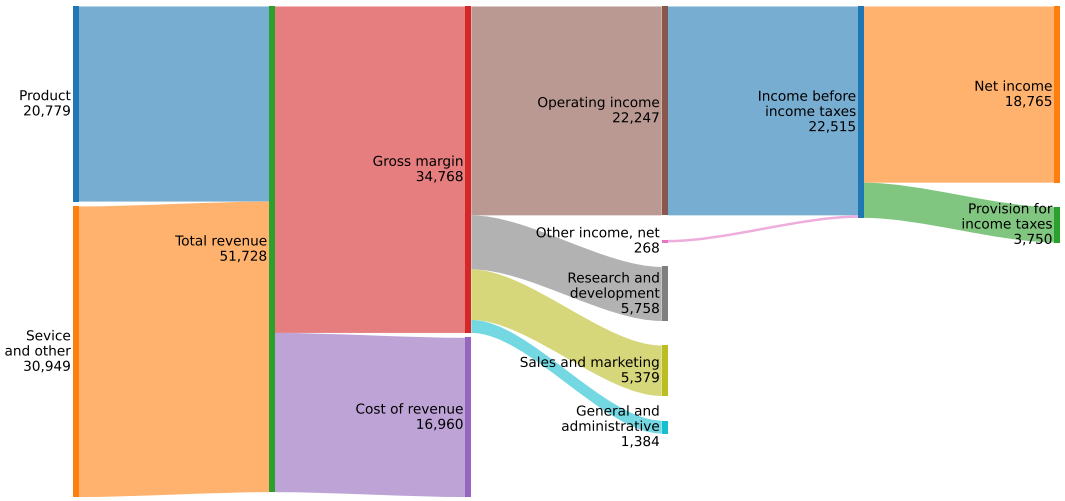

17.12.6 Arcplot

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06_ArcPlot.py, and the XML code in the file D06_ArcPlot.2D.xml.

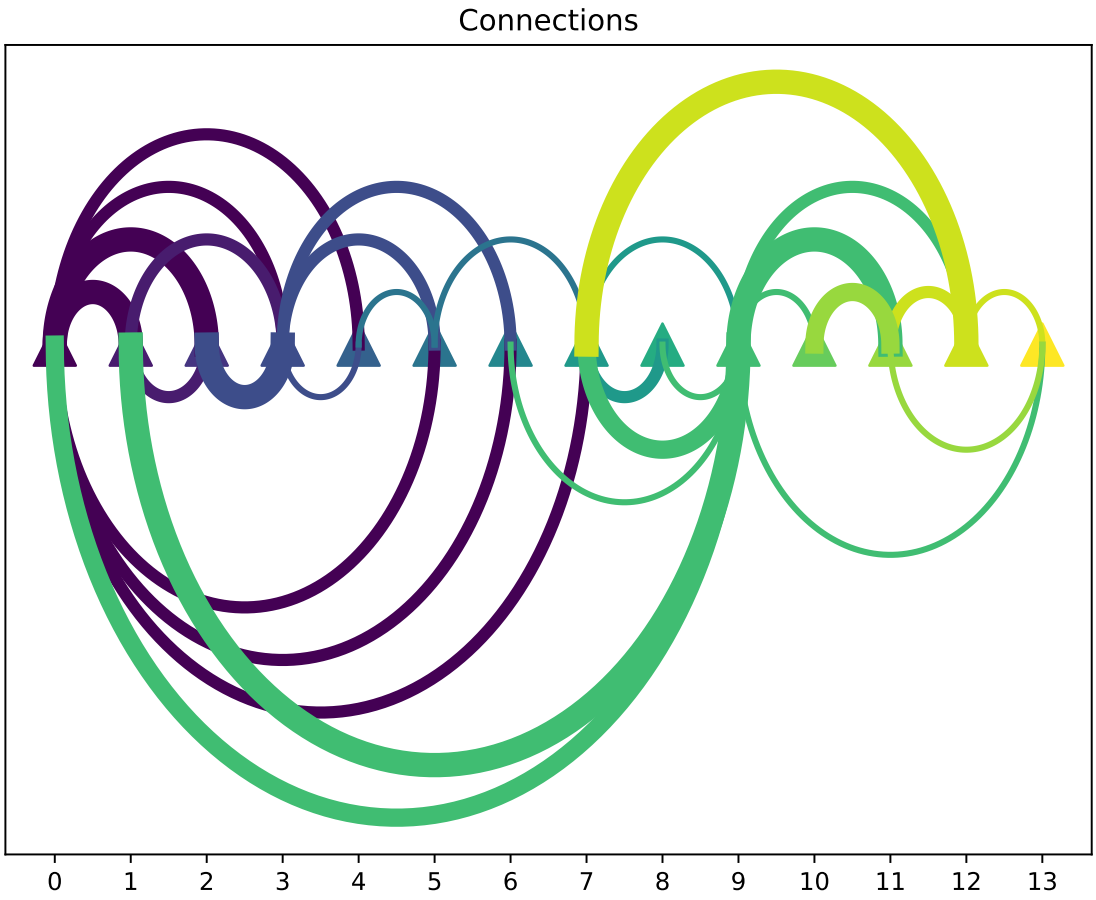

17.12.7 Funnel Chart

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07_FunnelChart.py, and the XML code in the file D07_FunnelChart.2D.xml.

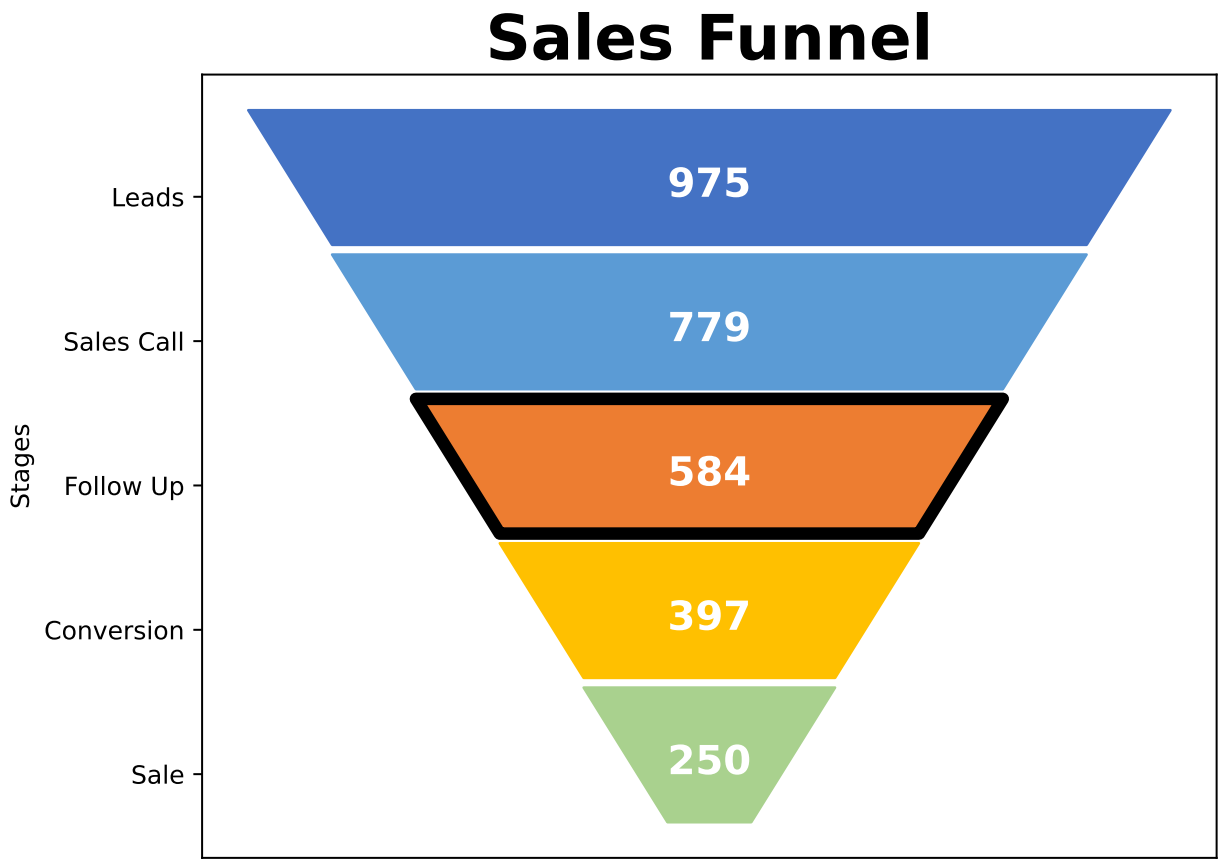

17.13 Circular plots and flows

17.13.1 Circular track plotting

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_CircularTrackplotting.py, and the XML code in the file D01_CircularTrackplotting.2D.xml.

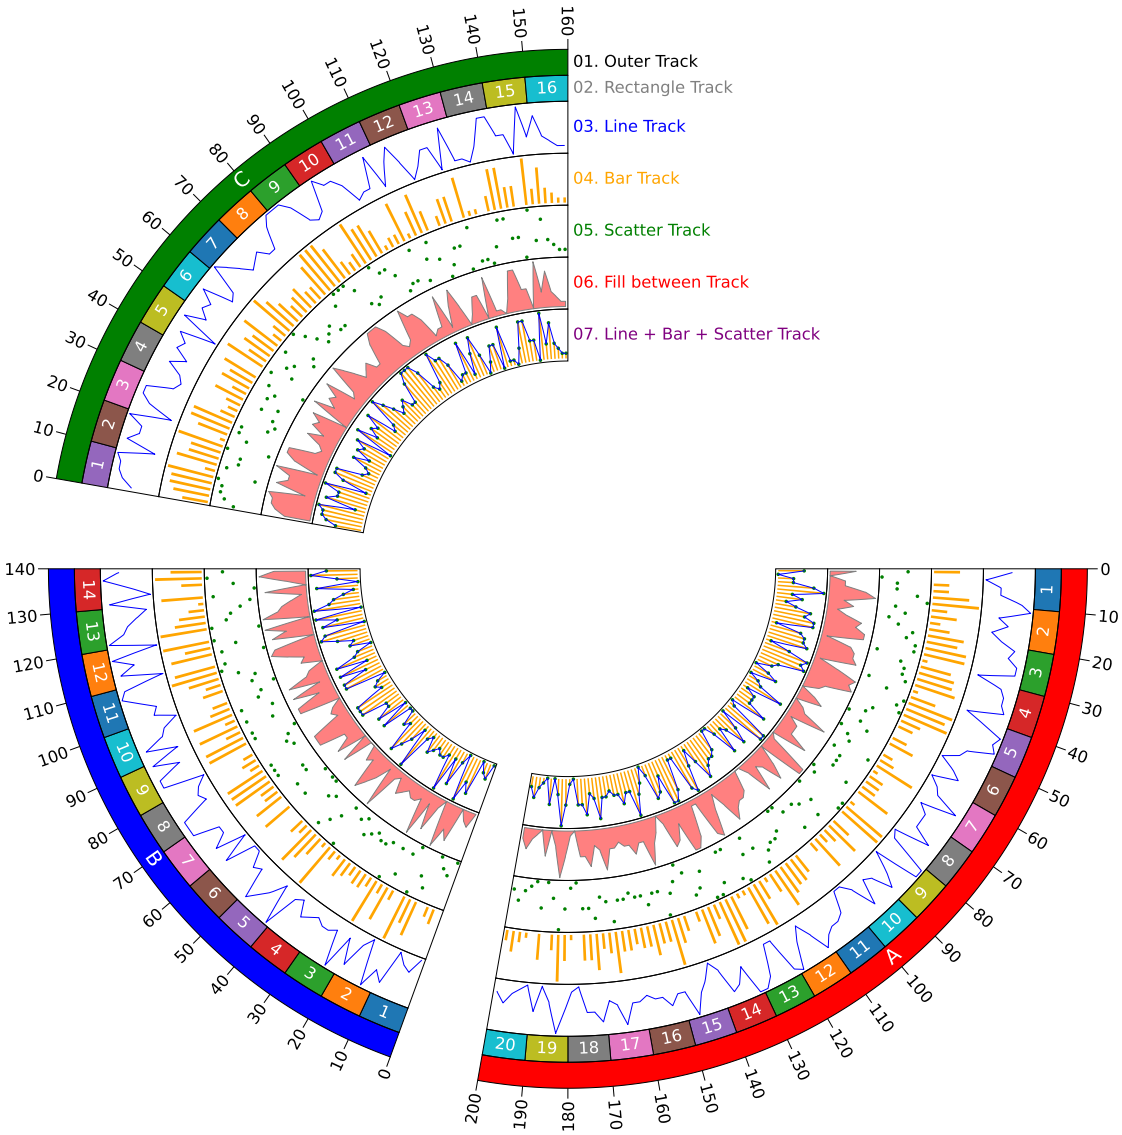

Some text

17.13.2 Circular heatmap

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02_CircularHeatmap.py, and the XML code in the file D02_CircularHeatmap.2D.xml.

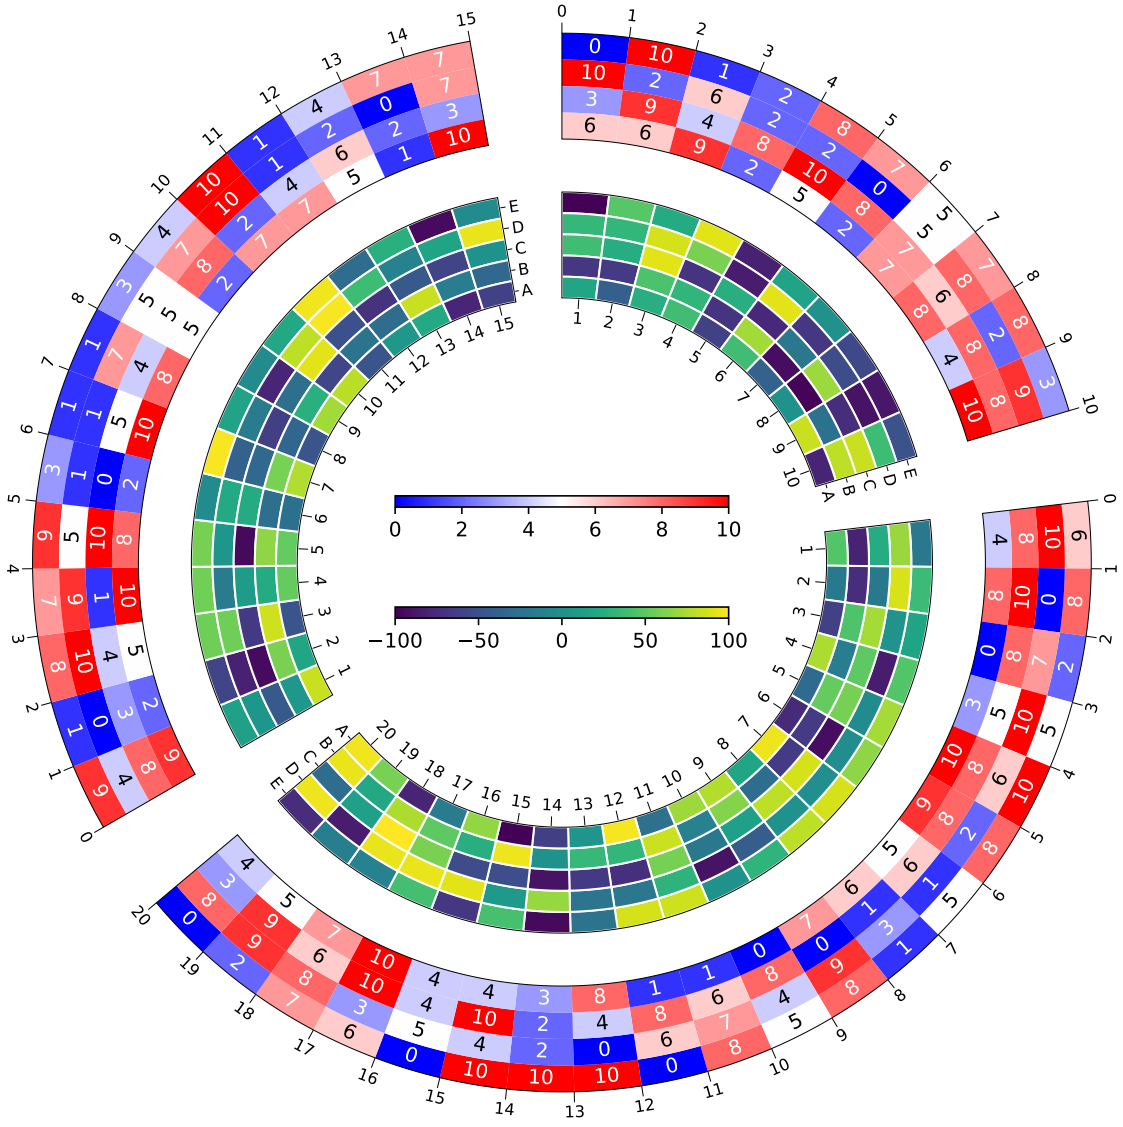

Some text

17.13.3 Chord diagram (matrix 3x6)

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03_ChordDiagramMatrix3x6.py, and the XML code in the file D03_ChordDiagramMatrix3x6.2D.xml.

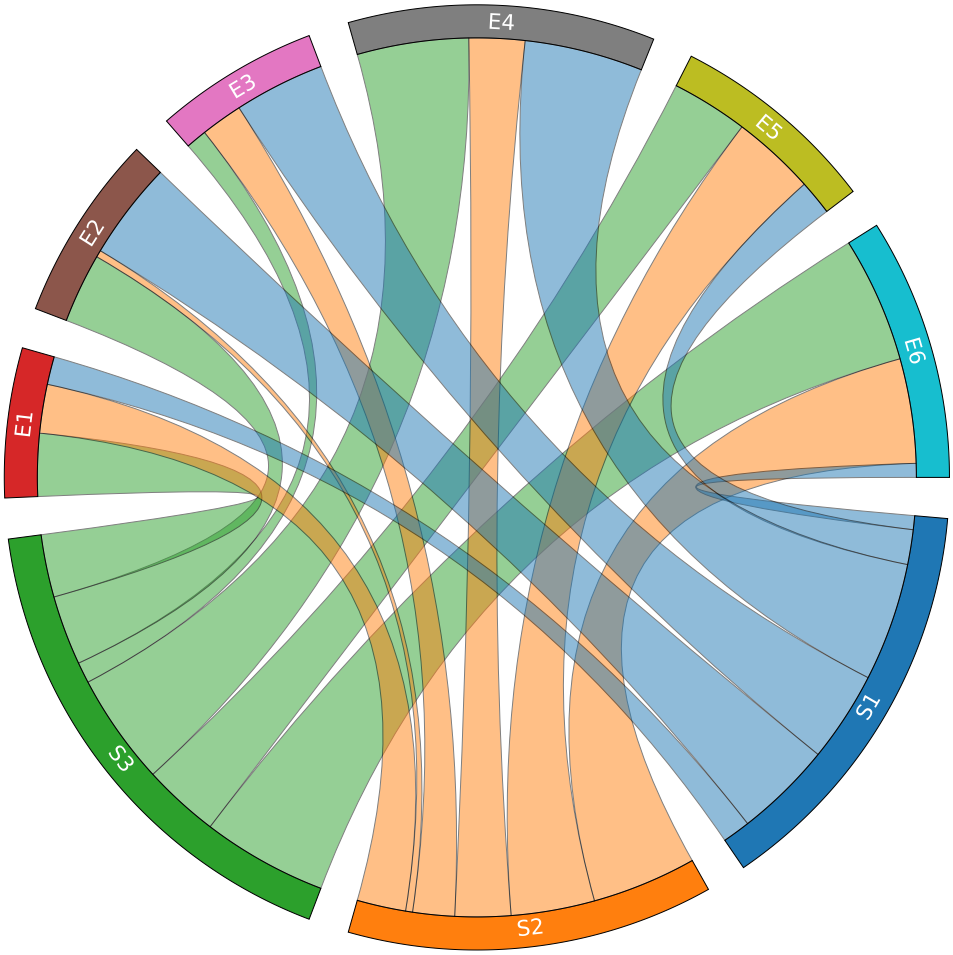

Some text

17.13.4 Chord diagram (matrix10x10)

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04_ChordDiagramMatrix10x10.py, and the XML code in the file D04_ChordDiagramMatrix10x10.2D.xml.

17.13.5 Chord diagram (from-to table)

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05_ChordDiagramFromTo.py, and the XML code in the file D05_ChordDiagramFromTo.2D.xml.

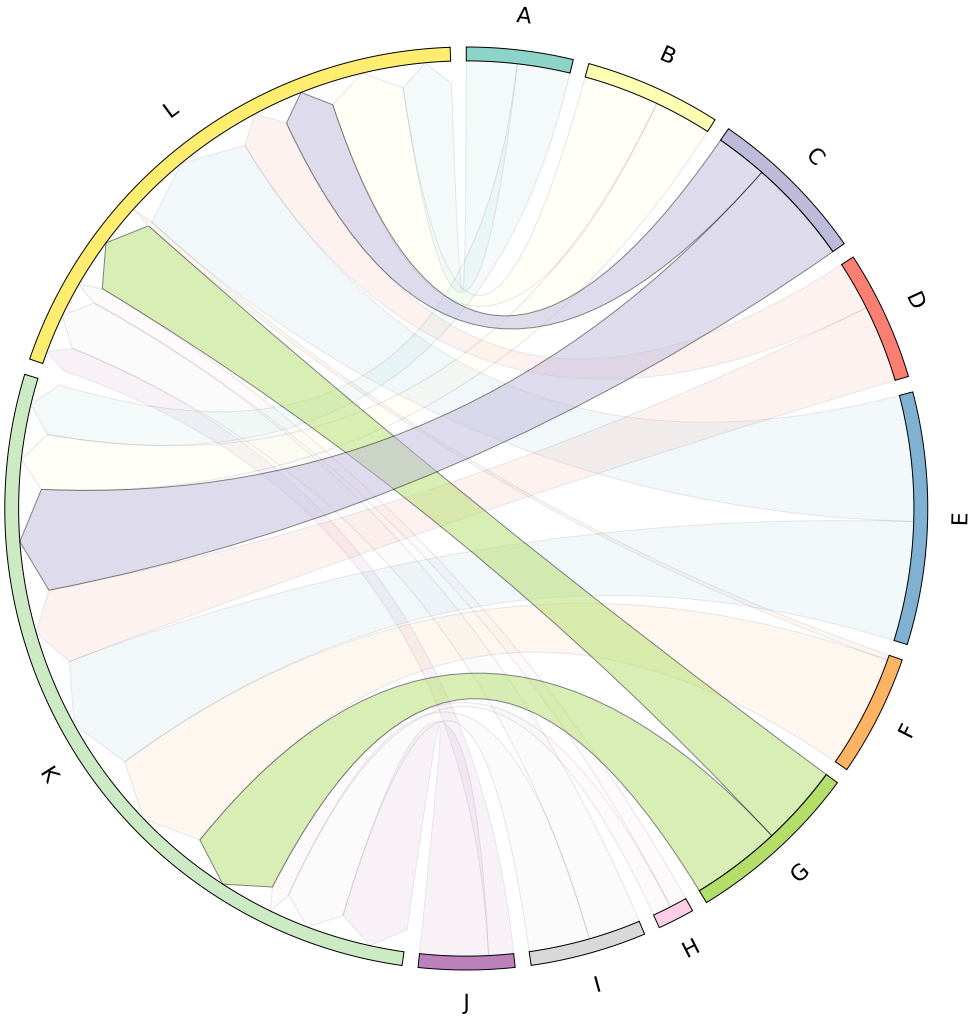

Some text

17.13.6 Circos plot: genom of a phage

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06_CircosPlotGenomPhage.py, and the XML code in the file D06_CircosPlotGenomPhage.2D.xml.

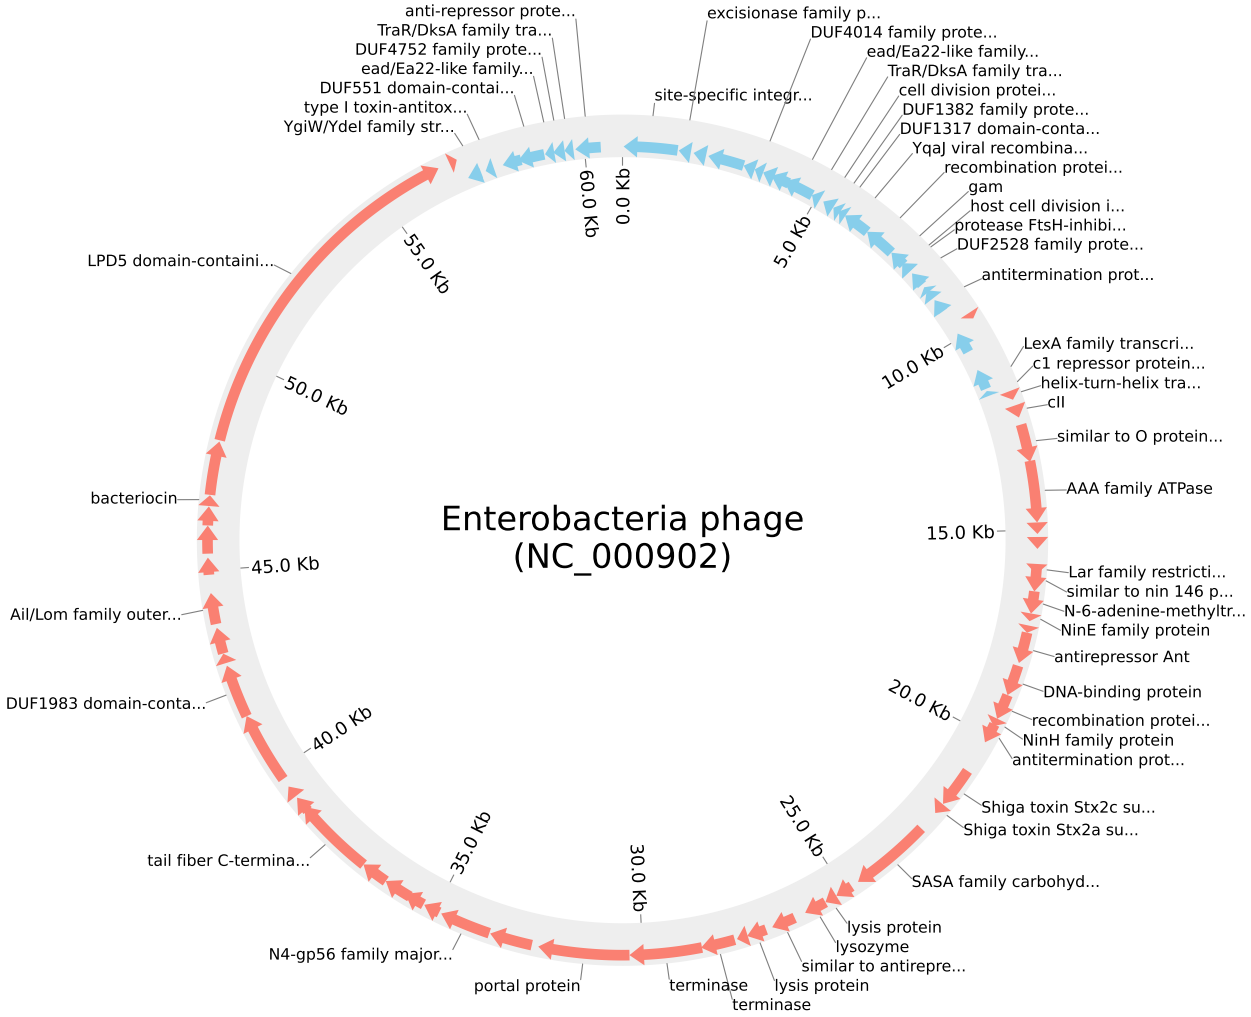

17.13.7 Circos plot: genom of homo sapiens

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07_CircosPlotGenomHomoSapiens.py, and the XML code in the file D07_CircosPlotGenomHomoSapiens.2D.xml.

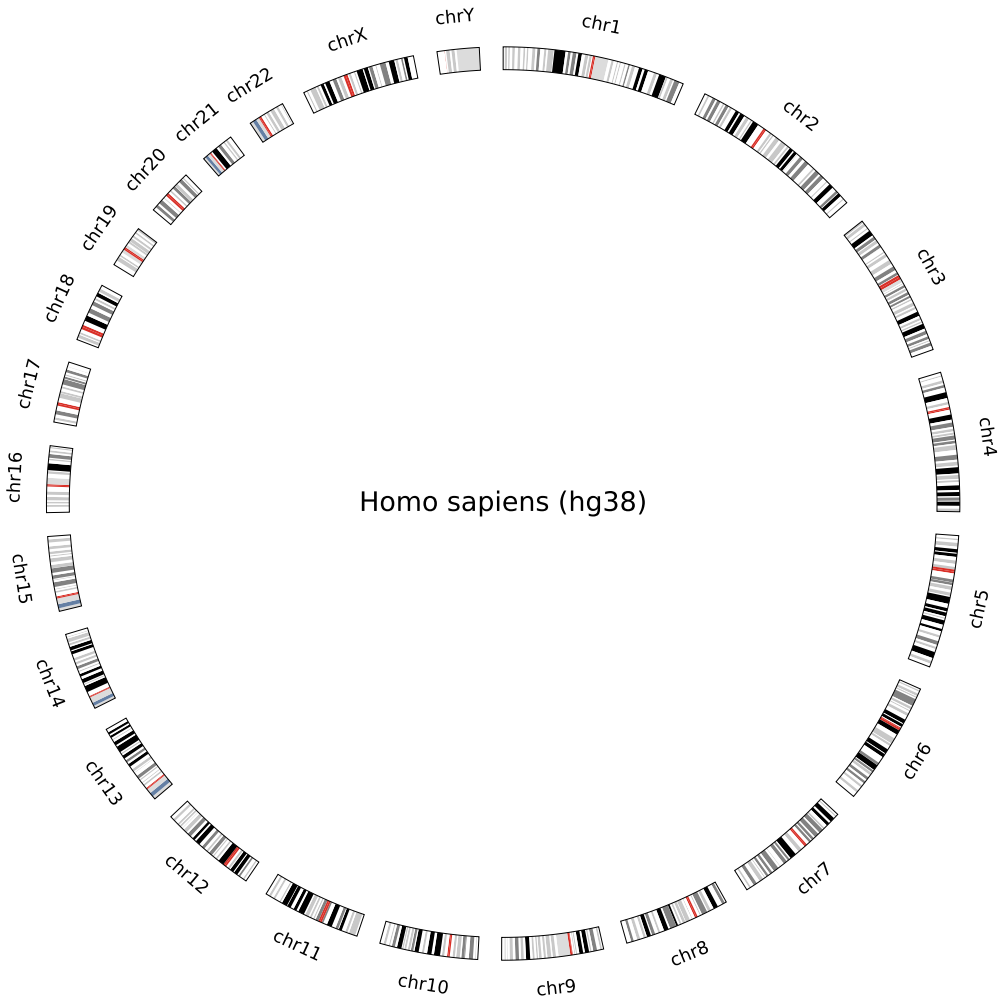

Some text

17.13.8 Circos plot: chromosome links

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D08_CircosPlotChromosomeLinks.py, and the XML code in the file D08_CircosPlotChromosomeLinks.2D.xml.

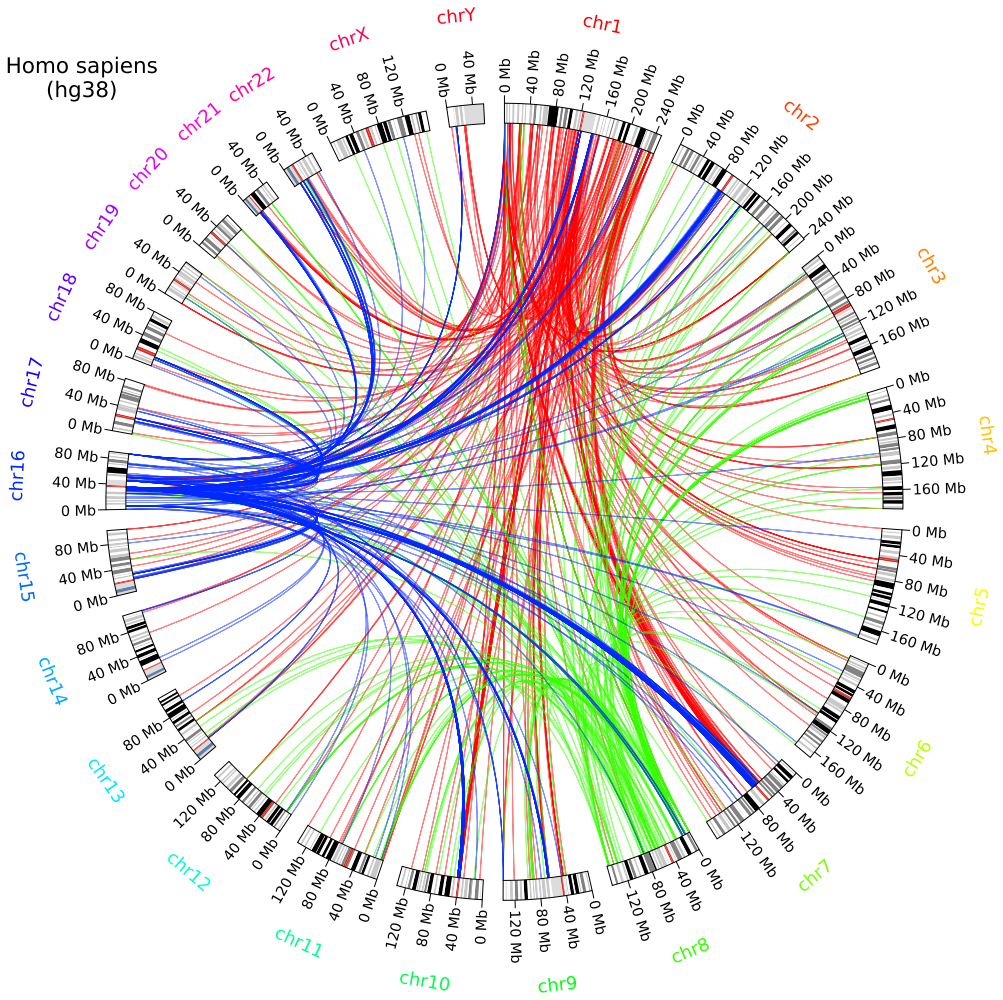

Some text

17.13.9 Philogenetic tree: bars

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D09_PhilogeneticTreeBars.py, and the XML code in the file D09_PhilogeneticTreeBars.2D.xml.

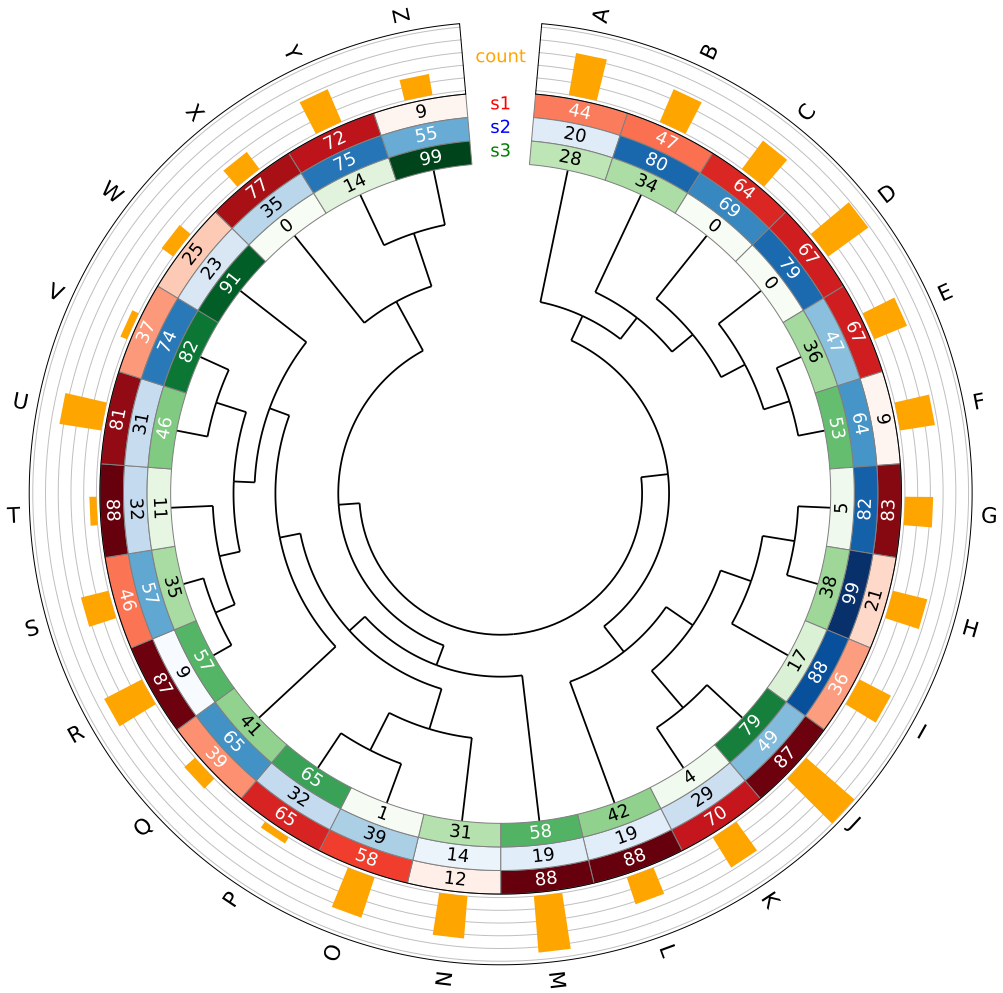

Some text

17.13.10 Philogenetic tree: heatmap

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D10_PhilogeneticTreeHeatmap.py, and the XML code in the file D10_PhilogeneticTreeHeatmap.2D.xml.

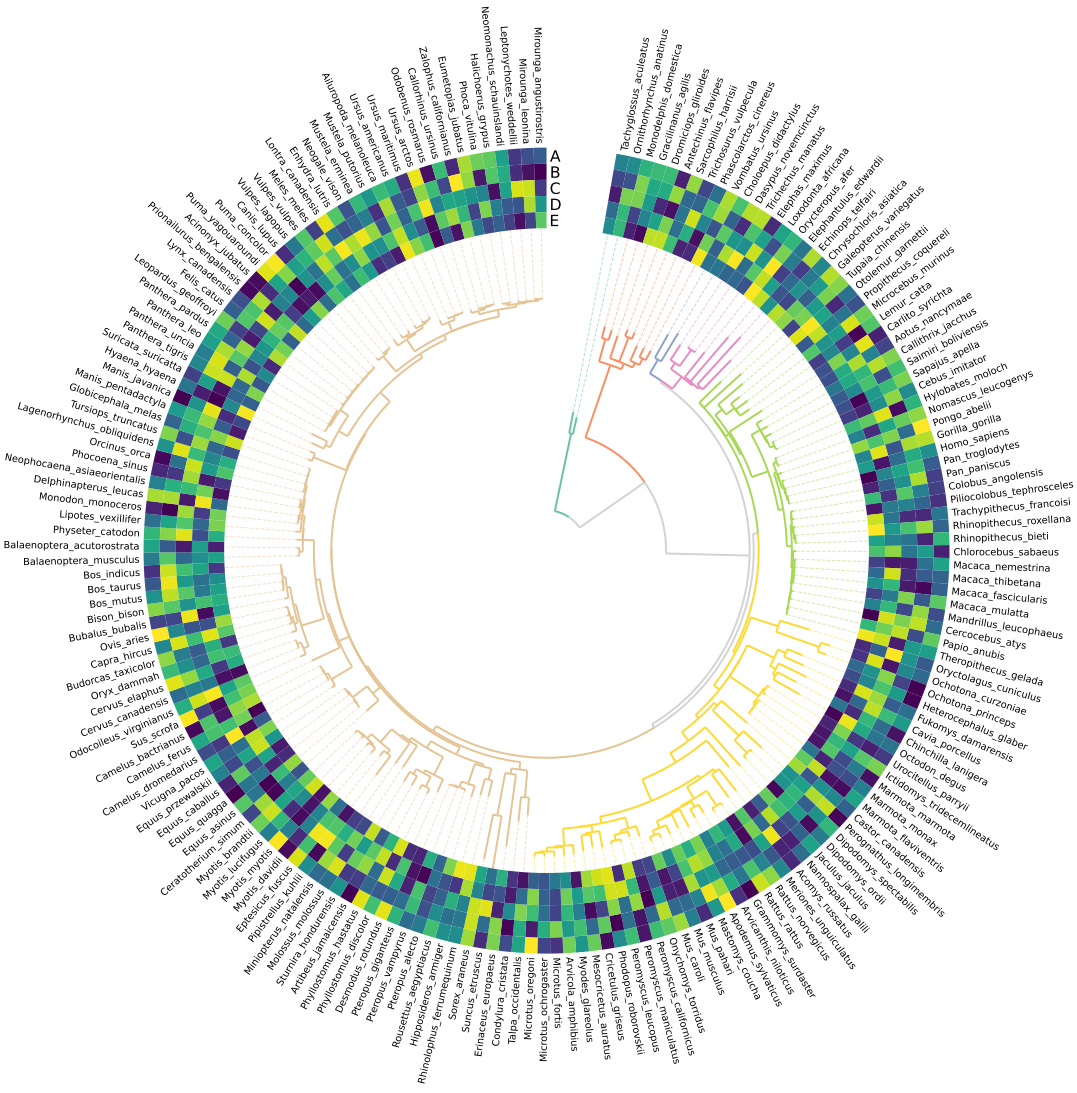

Some text

17.14 Network data (requires networkx)

See also: https://networkx.org/documentation/stable/index.html

See also: https://networkx.org/documentation/stable/auto_examples/drawing/index.html

17.14.1 Multipartite_Layout

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_MultipartiteLayout.py, and the XML code in the file D01_Multipartite.2D.xml.

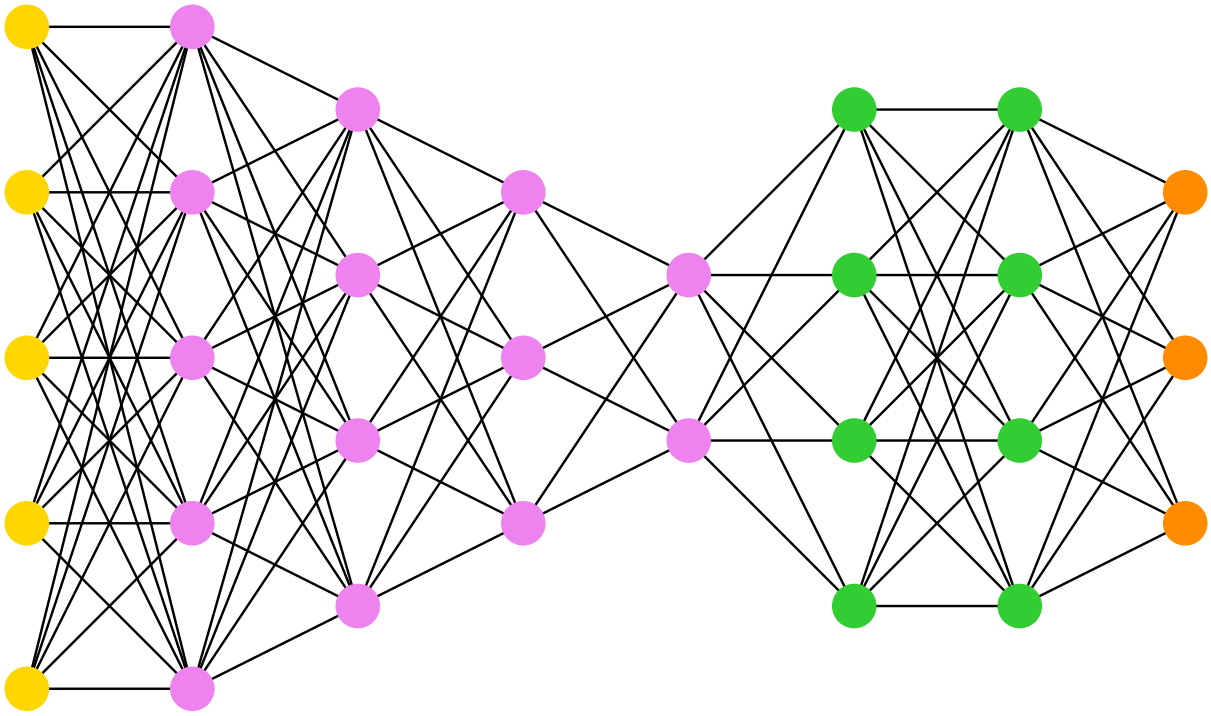

17.14.2 Rainbow_Coloring

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02_RainbowColoring.py, and the XML code in the file D02_RainbowColoring.2D.xml.

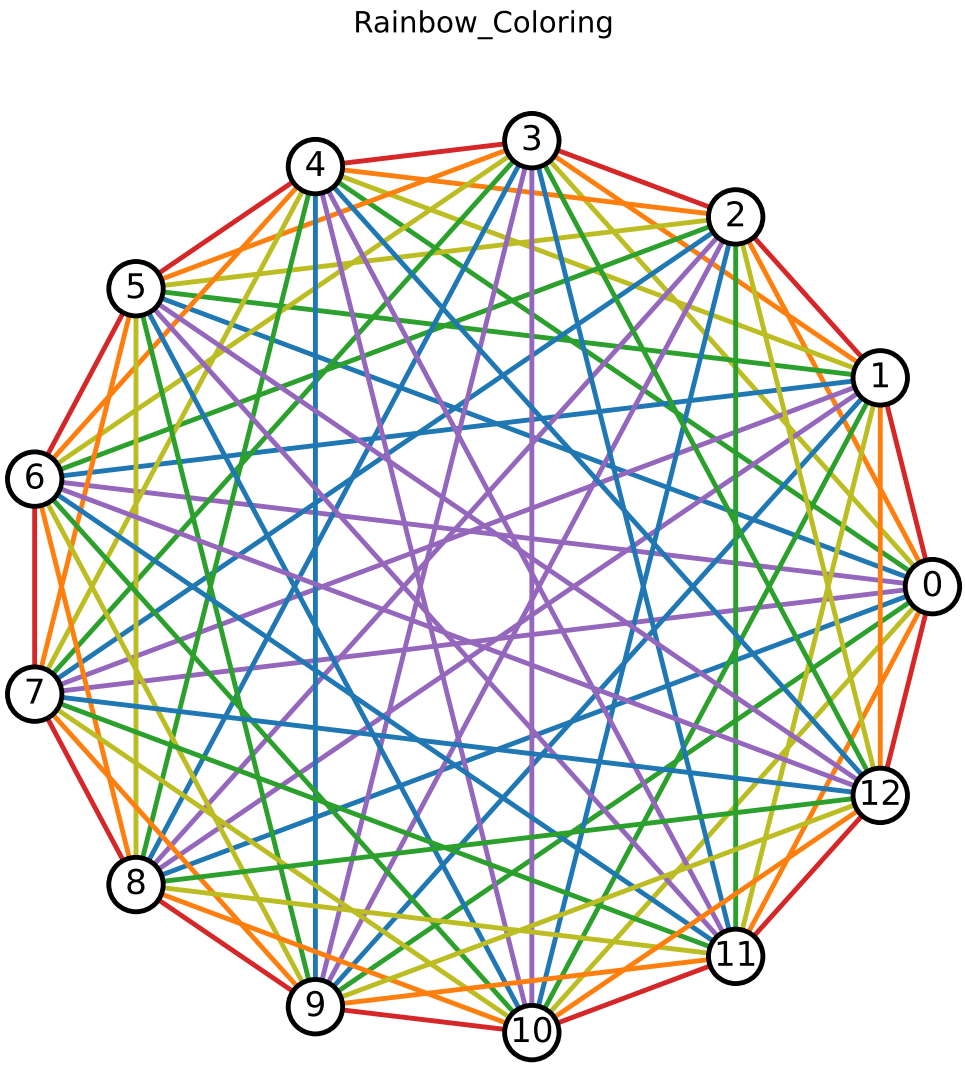

17.14.3 Random_Geometry

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03_RandomGeometric.py, and the XML code in the file D03_RandomGeometric.2D.xml.

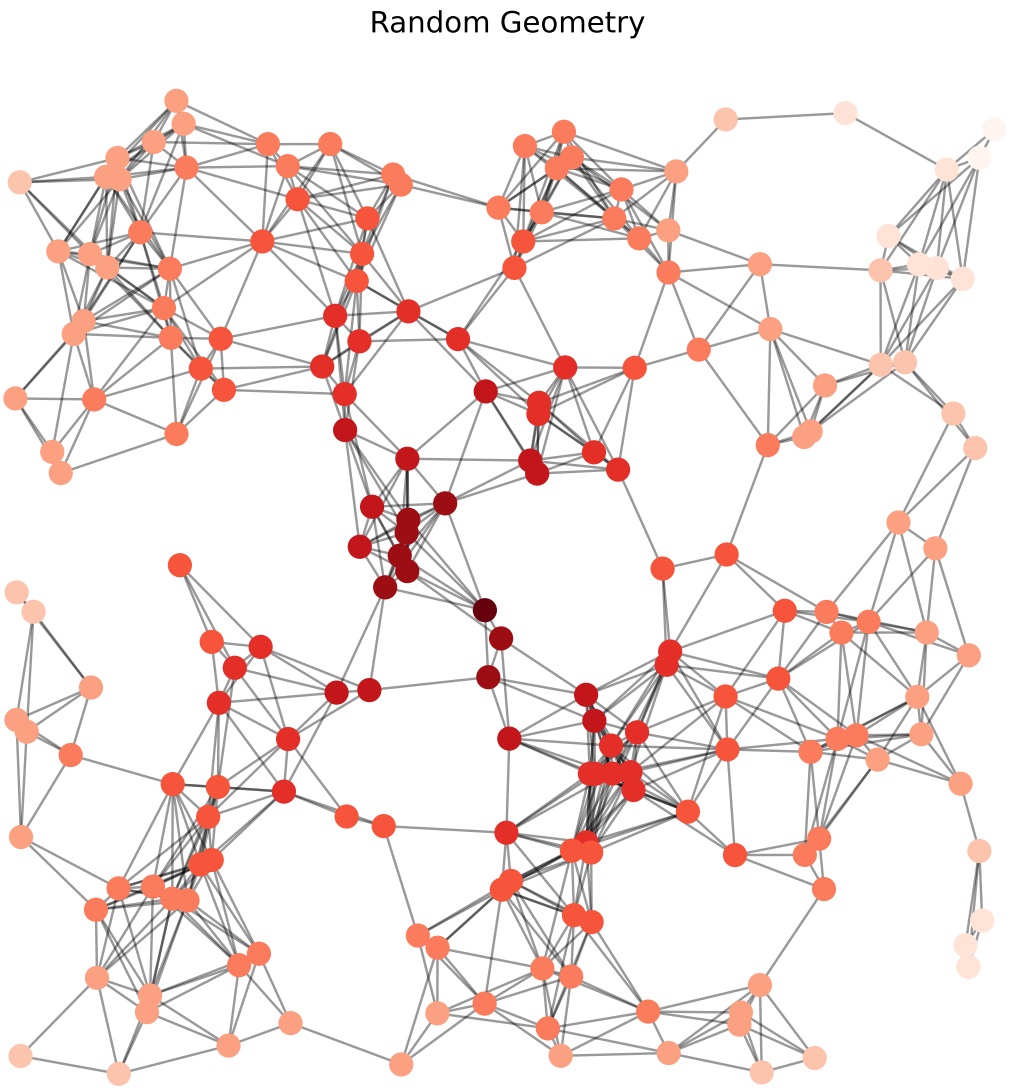

17.14.4 Travelling_Salesman

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04_TravellingSalesman.py, and the XML code in the file D04_TravellingSalesman.2D.xml.

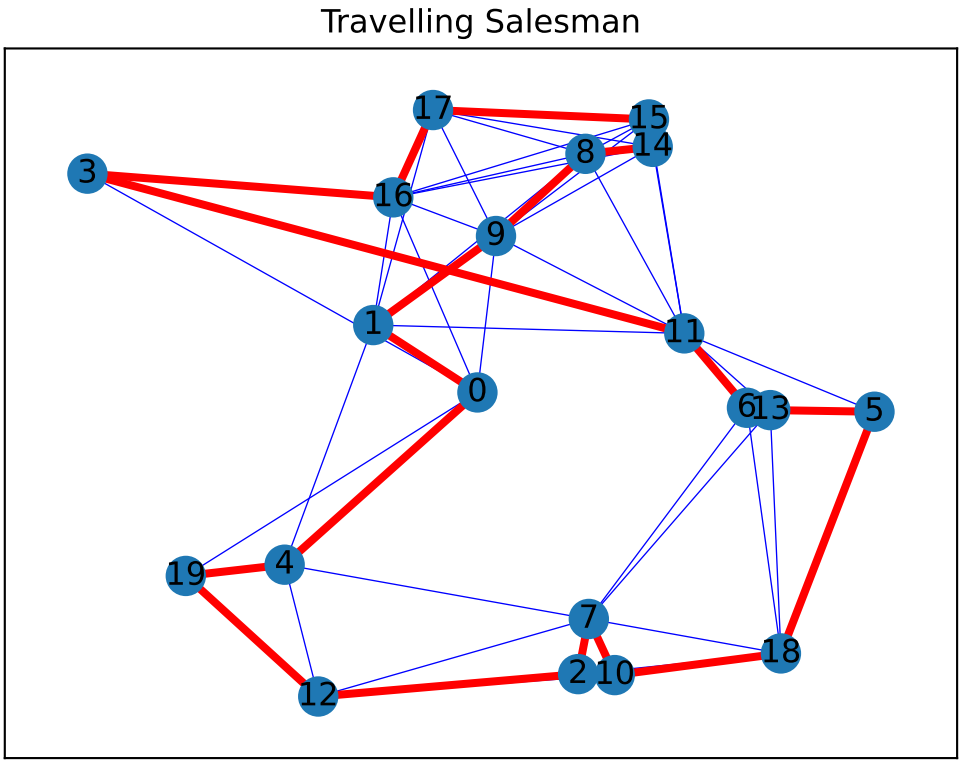

17.14.5 NapoleonRussianCampaign

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05_NapoleonRussianCampaign.py, and the XML code in the file D05_Napoleon.2D.xml.

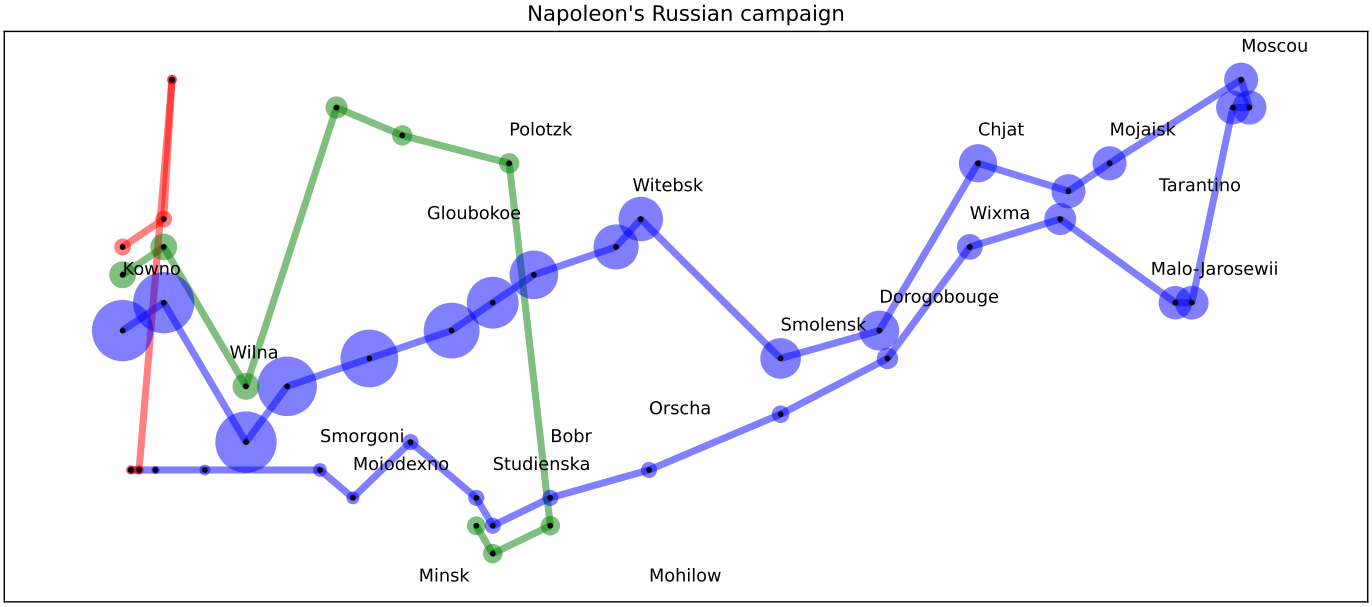

17.14.6 Community Visualisation

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06_CommunityVisualisation.py, and the XML code in the file D06_CommunityVisualisation.2D.xml.

Community Visualization of 2 communities with modularity of 0.34766

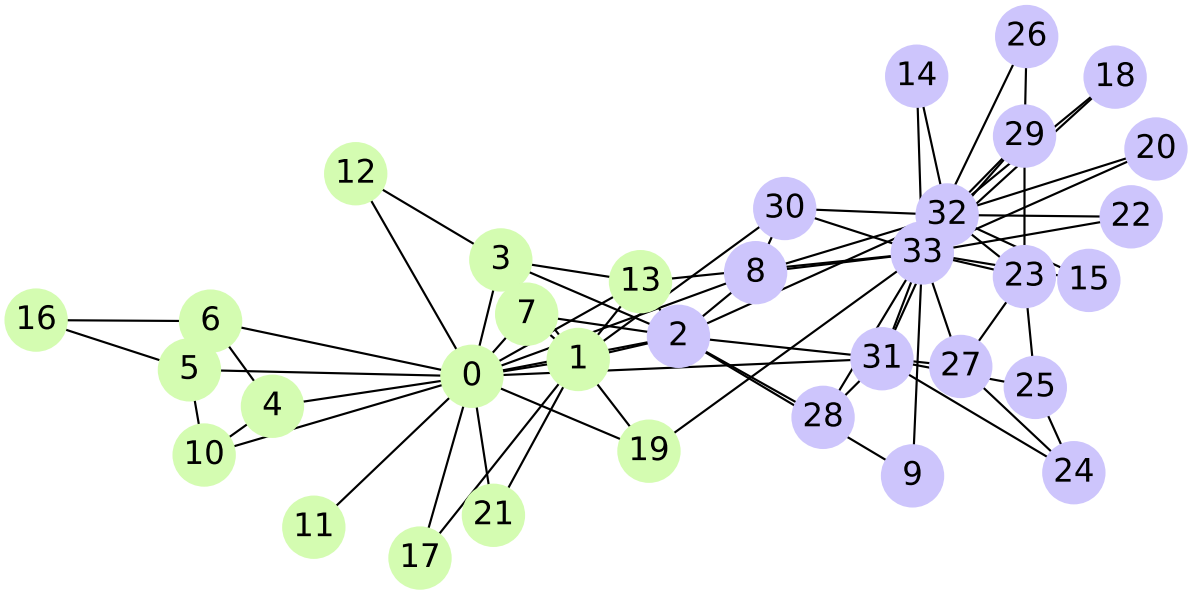

Community Visualization of 5 communities with modularity of 0.384972

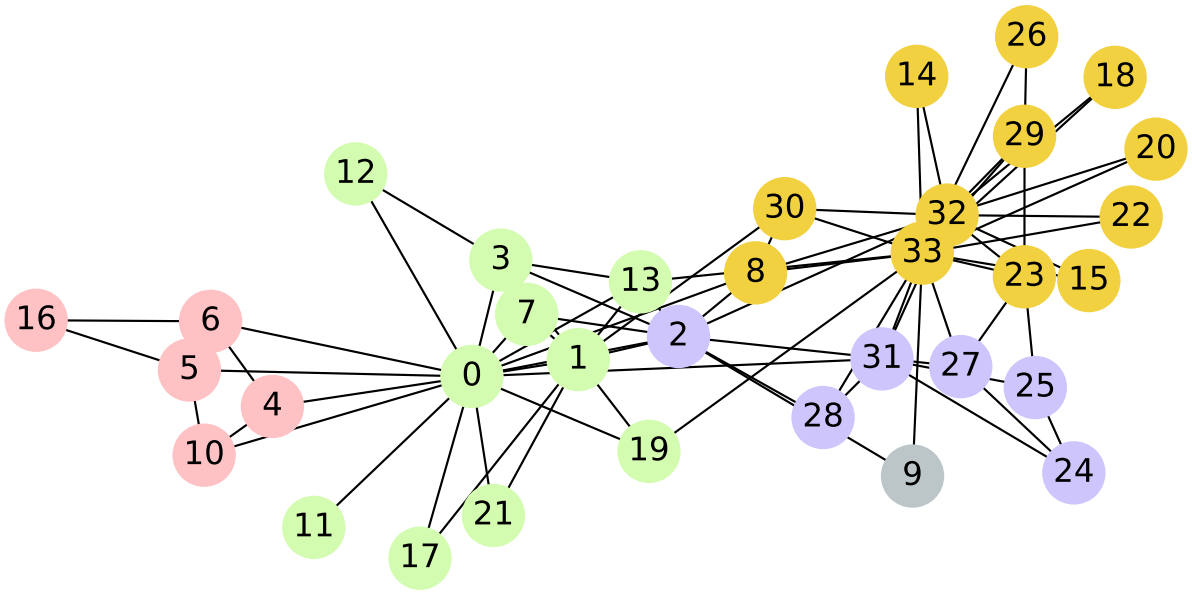

17.14.7 Connected Components

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07_ConnectedComponents.py, and the XML code in the file D07_ConnectedComponents.2D.xml.

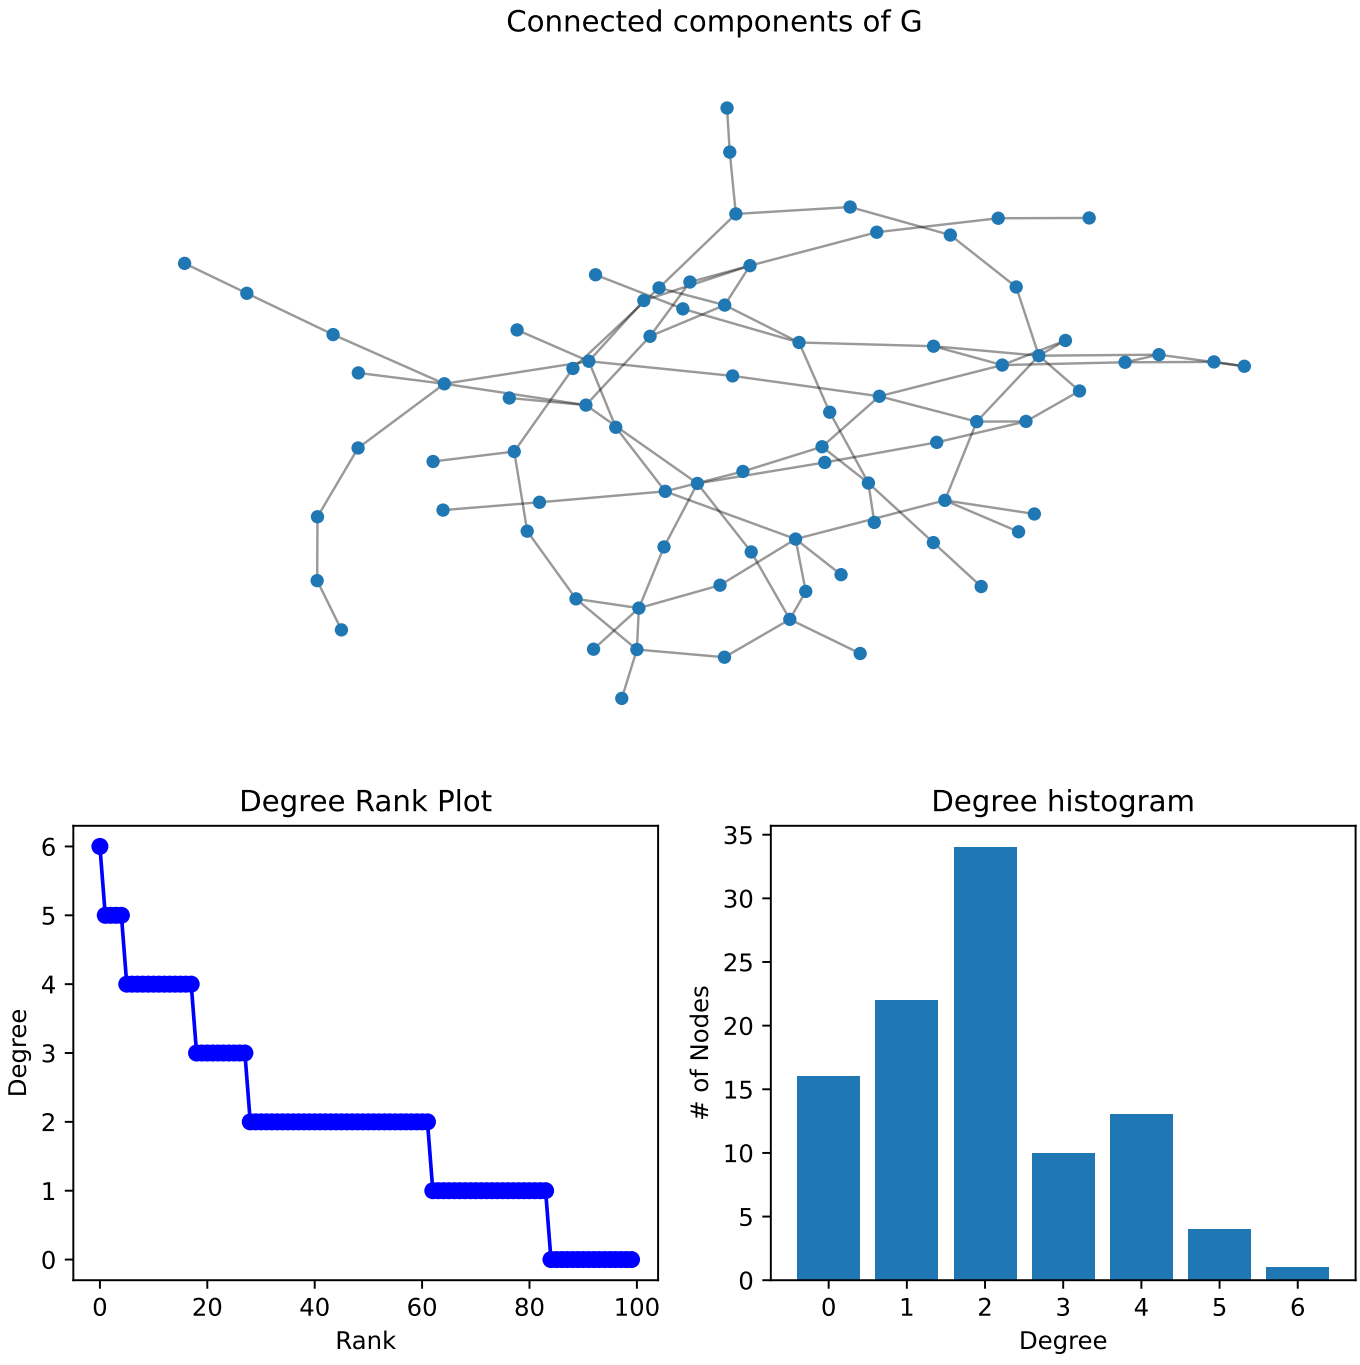

CHAPTER

EIGHTEEN

VISUALISATION OF FUNCTIONS AND CURVES (2D)

18.1 Introduction to 2D functions plots

18.1.1 Simple plot of (well-behaved) functions in 2D

This is a (slightly modified) example from the Matplotlib tutorials.

See https://matplotlib.org/stable/gallery/lines_bars_and_markers/simple_plot.html

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_Simpleplot.py, and the XML code in the file D01_Simpleplot.2D.xml.

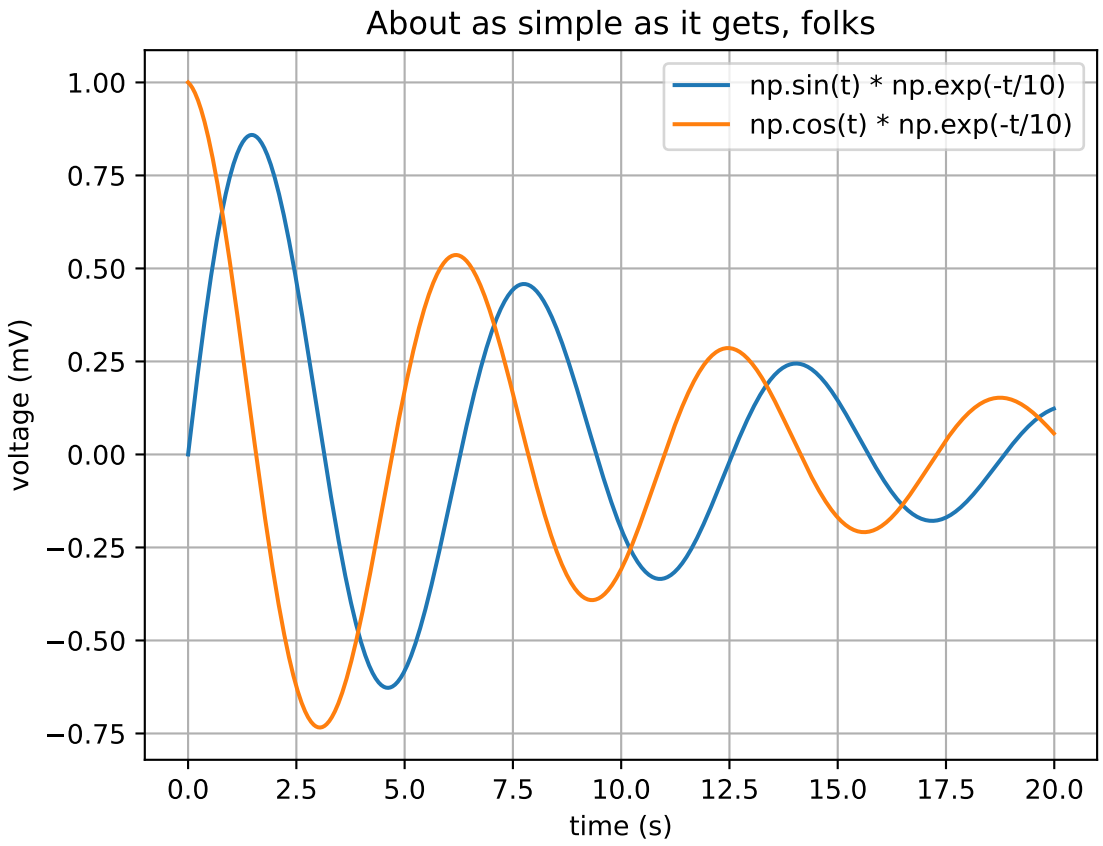

18.1.2 Function plots on different scales

This is an example from the Matplotlib tutorials.

See https://matplotlib.org/stable/gallery/subplots_axes_and_figures/two_scales.html

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02_PlotDiffScales.py, and the XML code in the file D02_PlotDiffScales.2D.xml.

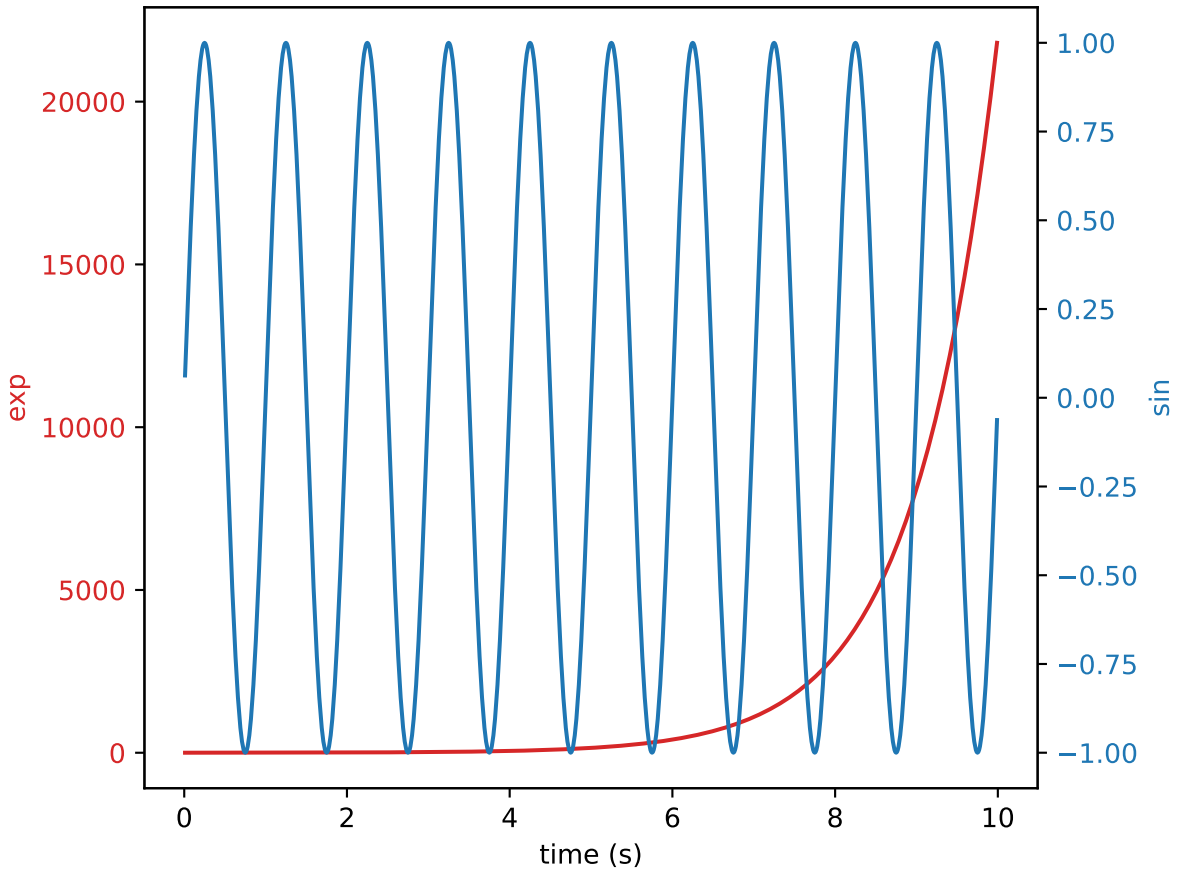

18.1.3 Stepplot

This is an example from the Matplotlib tutorials.

See https://matplotlib.org/stable/gallery/lines_bars_and_markers/step_demo.html

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03_Stepplot.py, and the XML code in the file D03_Stepplot.2D.xml.

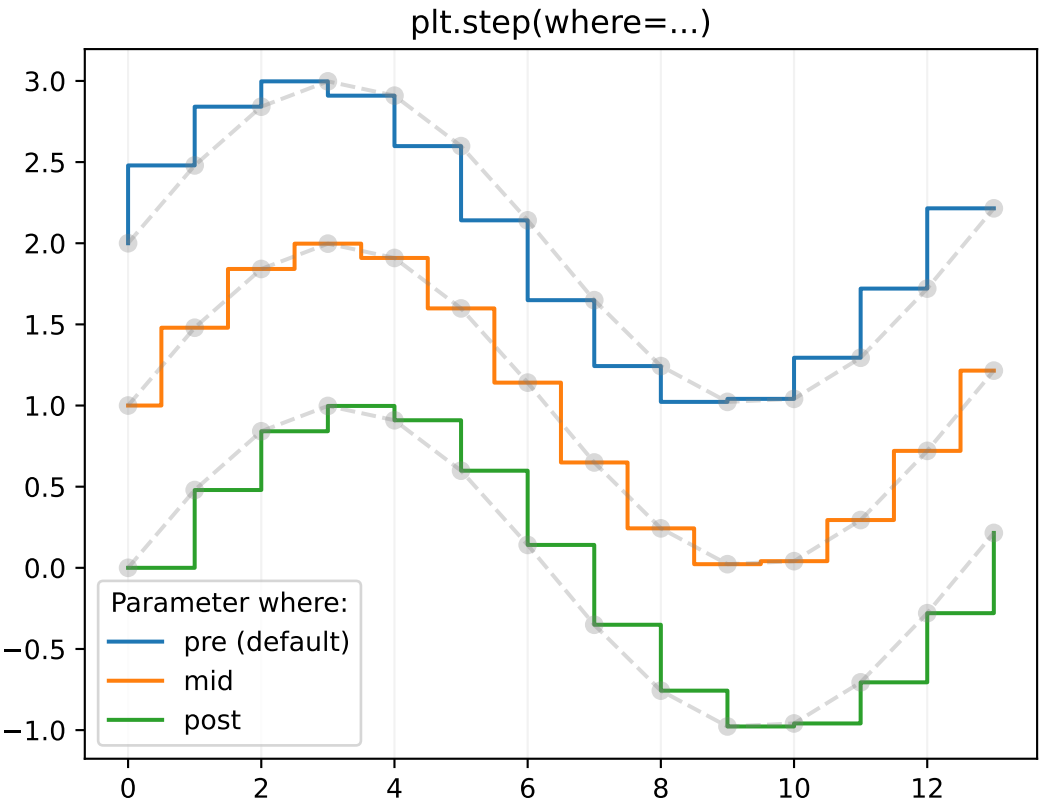

18.1.4 Stemplot

This is an example from the Matplotlib tutorials.

See https://matplotlib.org/stable/gallery/lines_bars_and_markers/stem_plot.html#sphx-glr-gallery-lines-bars-and-markers-stem-plot-py

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04_Stemplot.py, and the XML code in the file D04_Stemplot.2D.xml.

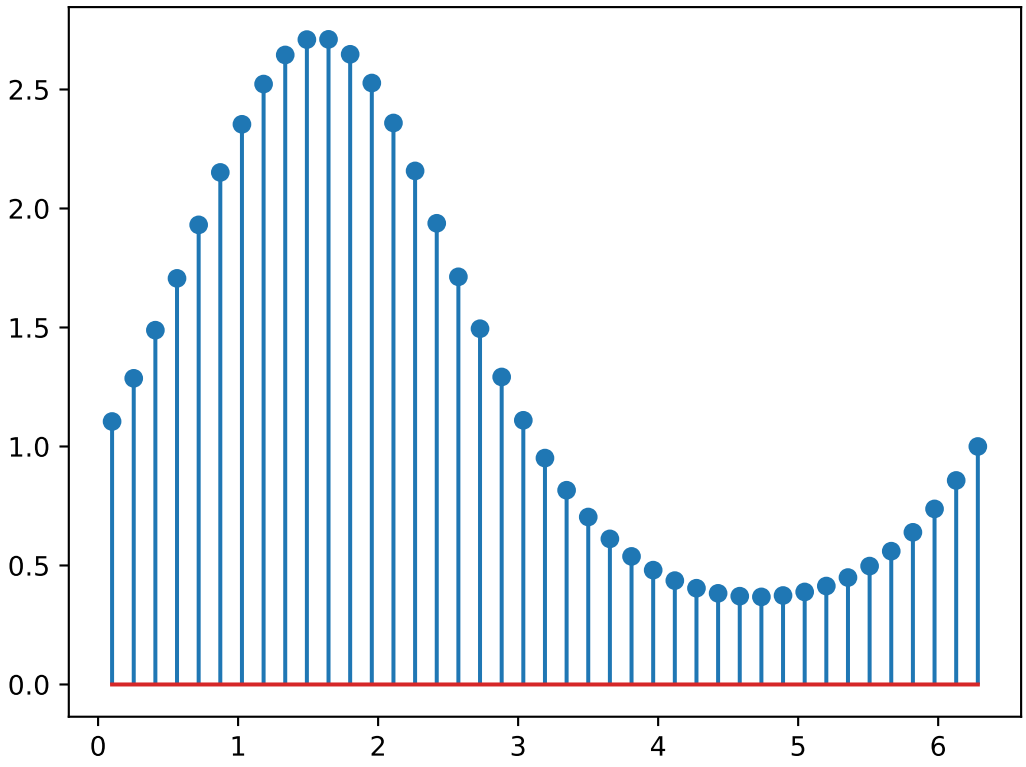

18.1.5 Histograms and densities

This is an example from the Matplotlib tutorials.

See https://matplotlib.org/stable/gallery/statistics/histogram_normalization.html#

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05_HistogramsAndDensities.py, and the XML code in the file D05_HistogramsAndDensities.2D.xml.

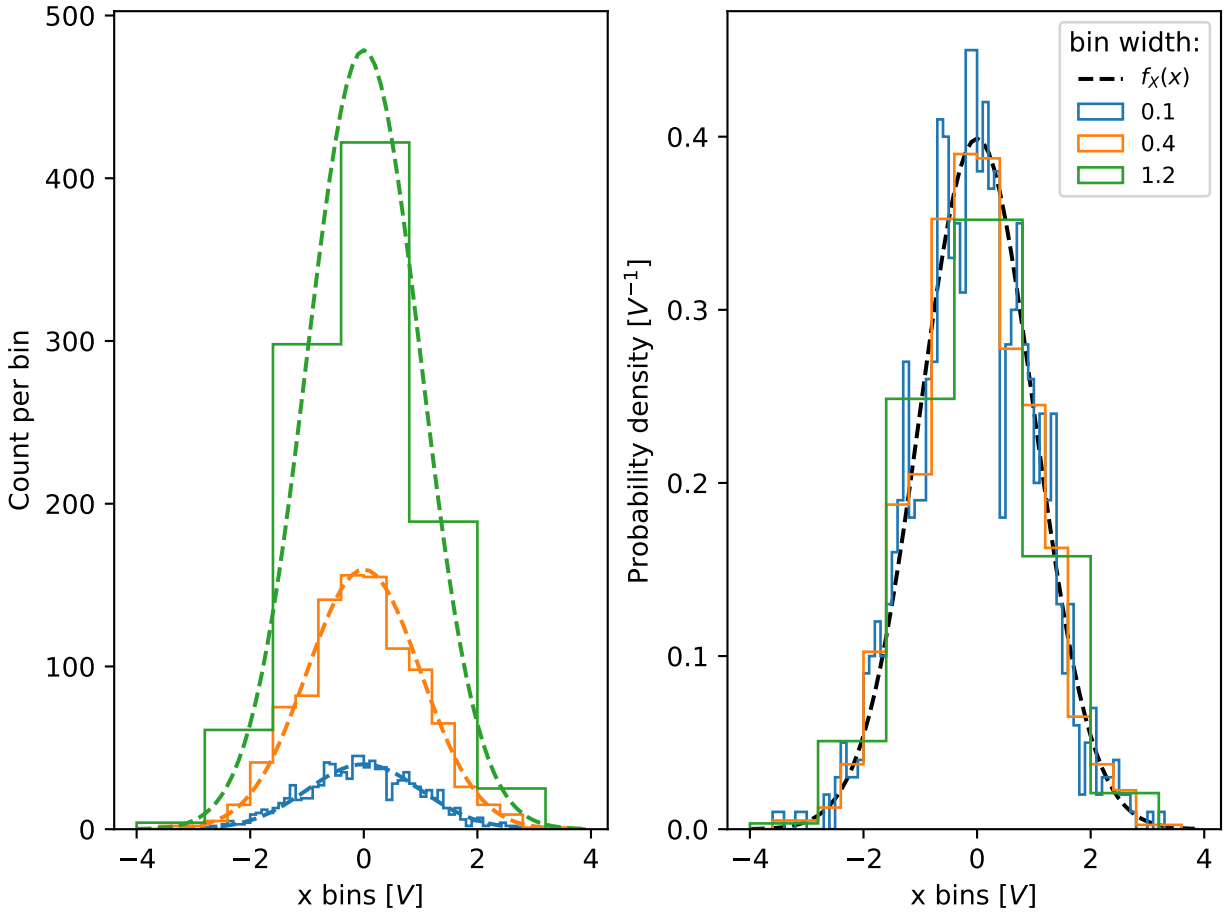

18.1.6 Cumulative histogram and CDF

This is an example from the Matplotlib tutorials.

see https://matplotlib.org/stable/gallery/statistics/histogram_cumulative.html#

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06_CumulativeHistogramAndCDF.py, and the XML code in the file D06_CumulativeHistogramAndCDF.2D.xml.

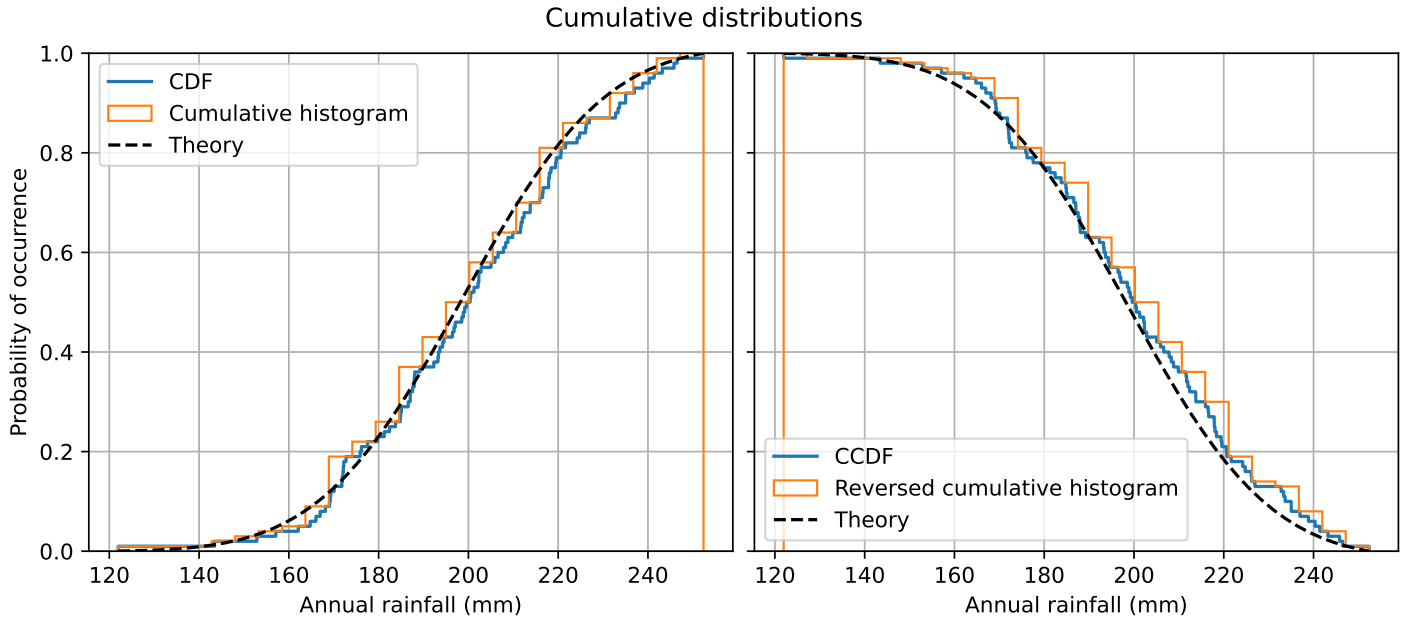

18.1.7 Plots of continuous distribution functions

Some text

18.1.7.1 Probability density function (pdf)

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07_DistPlotContinuous.py, and the XML code in the file D07_DistPlotContinuous.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        ylim = None
        target = 'pdf' # pdf, cdf, 'sf', 'hf', 'chf', 'qtf', 'isf'

        Title = 'Beta distribution'
        a = [5, 10.0, 20.5]
        b = [20.5, 10.0, 5]
        xlim = [0, 0.999]
        if target=='hf': ylim=[0, 100]

        dlist = []
        ltext = []
        for j in range(len(a)):
            dlist.append(dreal.dist_beta(a[j], b[j]))
            ltext.append('a=' + str(a[j]) + ', b=' + str(b[j]))

        DistPlotContinuous(Title = Title, dlist=dlist, xlim = xlim,
            ylim = ylim, target = target, ltext = ltext, marker='o',
            markersize=0)
```

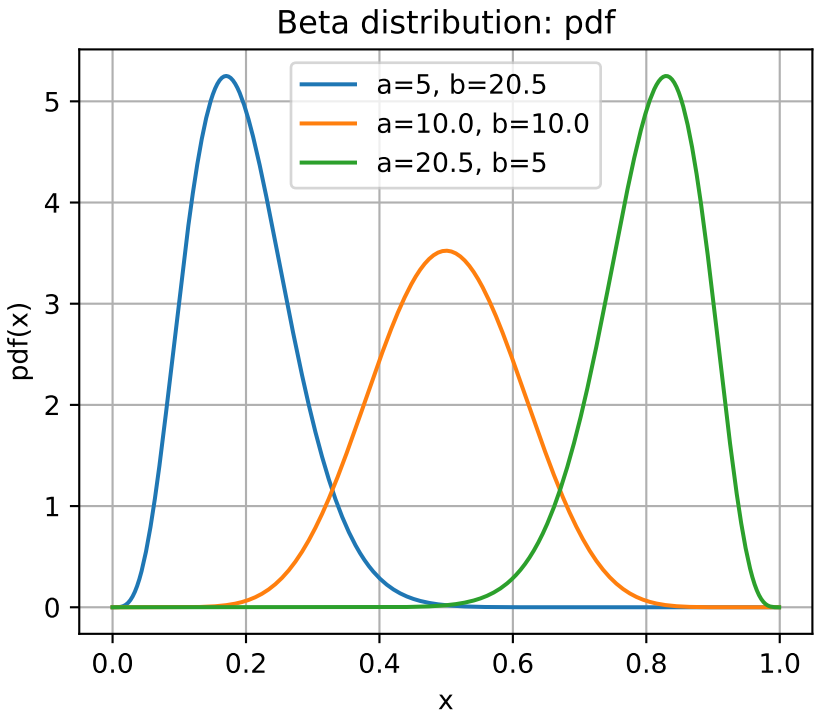

18.1.7.2 Cumulative distribution function (cdf)

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07_DistPlotContinuous.py, and the XML code in the file D07_DistPlotContinuous.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        ylim = None
        target = 'cdf' # pdf, cdf, 'sf', 'hf', 'chf', 'qtf', 'isf'

        Title = 'Beta distribution'
        a = [5, 10.0, 20.5]
        b = [20.5, 10.0, 5]
        xlim = [0, 0.999]
        if target=='hf': ylim=[0, 100]

        dlist = []
        ltext = []
        for j in range(len(a)):
            dlist.append(dreal.dist_beta(a[j], b[j]))
            ltext.append('a=' + str(a[j]) + ', b=' + str(b[j]))

        DistPlotContinuous(Title = Title, dlist=dlist, xlim = xlim,
            ylim = ylim, target = target, ltext = ltext, marker='o',
            markersize=0)
```

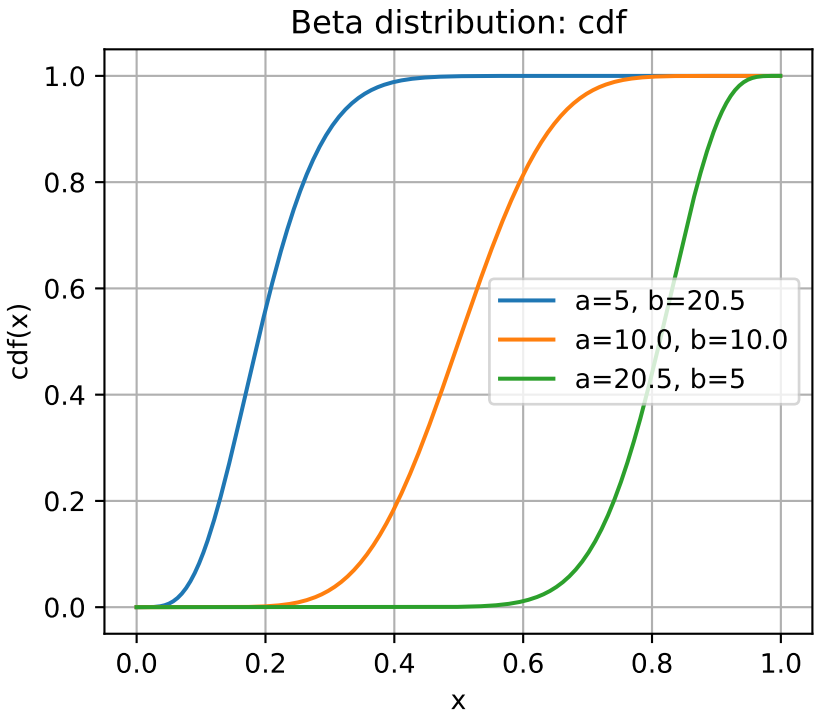

18.1.7.3 Survival function (sf)

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07_DistPlotContinuous.py, and the XML code in the file D07_DistPlotContinuous.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        ylim = None
        target = 'sf' # pdf, cdf, 'sf', 'hf', 'chf', 'qtf', 'isf'

        Title = 'Beta distribution'
        a = [5, 10.0, 20.5]
        b = [20.5, 10.0, 5]
        xlim = [0, 0.999]
        if target=='hf': ylim=[0, 100]

        dlist = []
        ltext = []
        for j in range(len(a)):
            dlist.append(dreal.dist_beta(a[j], b[j]))
            ltext.append('a=' + str(a[j]) + ', b=' + str(b[j]))

        DistPlotContinuous(Title = Title, dlist=dlist, xlim = xlim,
            ylim = ylim, target = target, ltext = ltext, marker='o',
            markersize=0)
```

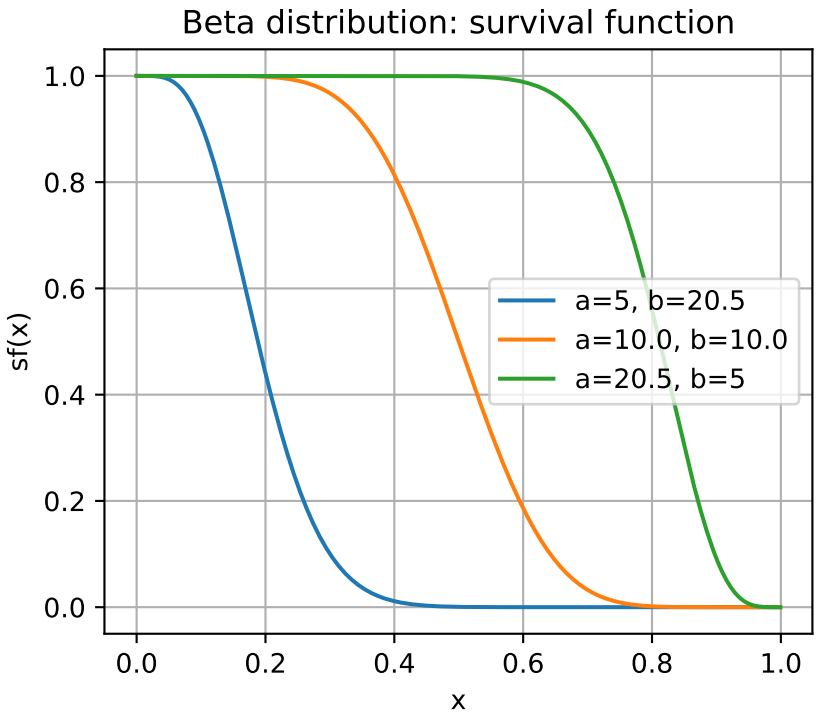

18.1.7.4 Hazard function (hf)

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07_DistPlotContinuous.py, and the XML code in the file D07_DistPlotContinuous.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        ylim = None
        target = 'hf' # pdf, cdf, 'sf', 'hf', 'chf', 'qtf', 'isf'

        Title = 'Beta distribution'
        a = [5, 10.0, 20.5]
        b = [20.5, 10.0, 5]
        xlim = [0, 0.999]
        if target=='hf': ylim=[0, 100]

        dlist = []
        ltext = []
        for j in range(len(a)):
            dlist.append(dreal.dist_beta(a[j], b[j]))
            ltext.append('a=' + str(a[j]) + ', b=' + str(b[j]))

        DistPlotContinuous(Title = Title, dlist=dlist, xlim = xlim,
            ylim = ylim, target = target, ltext = ltext, marker='o',
            markersize=0)
```

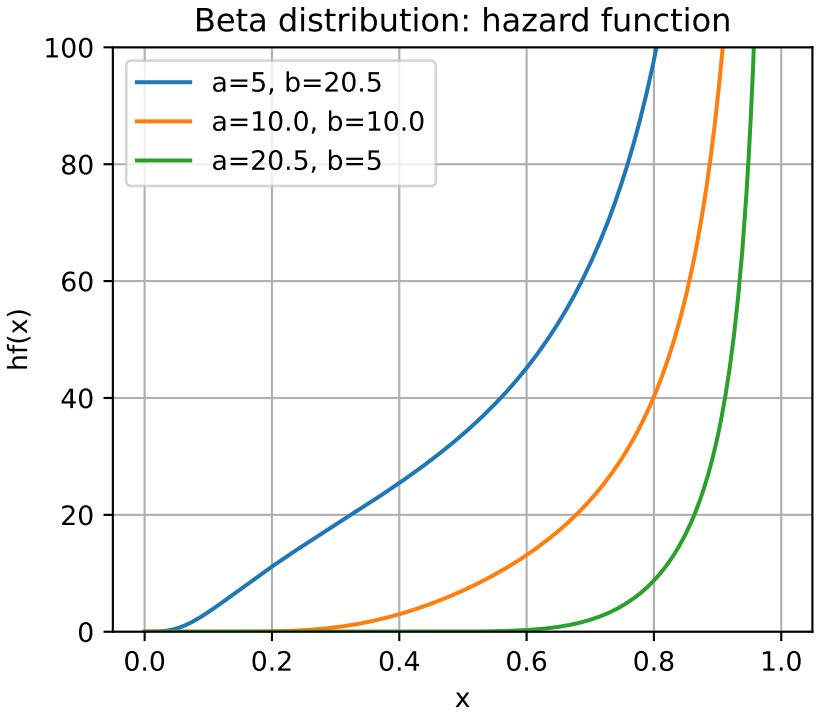

18.1.7.5 Cumulative hazard function (chf)

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07_DistPlotContinuous.py, and the XML code in the file D07_DistPlotContinuous.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        ylim = None
        target = 'chf' # pdf, cdf, 'sf', 'hf', 'chf', 'qtf', 'isf'

        Title = 'Beta distribution'
        a = [5, 10.0, 20.5]
        b = [20.5, 10.0, 5]
        xlim = [0, 0.999]
        if target=='hf': ylim=[0, 100]

        dlist = []
        ltext = []
        for j in range(len(a)):
            dlist.append(dreal.dist_beta(a[j], b[j]))
            ltext.append('a=' + str(a[j]) + ', b=' + str(b[j]))

        DistPlotContinuous(Title = Title, dlist=dlist, xlim = xlim,
            ylim = ylim, target = target, ltext = ltext, marker='o',
            markersize=0)
```

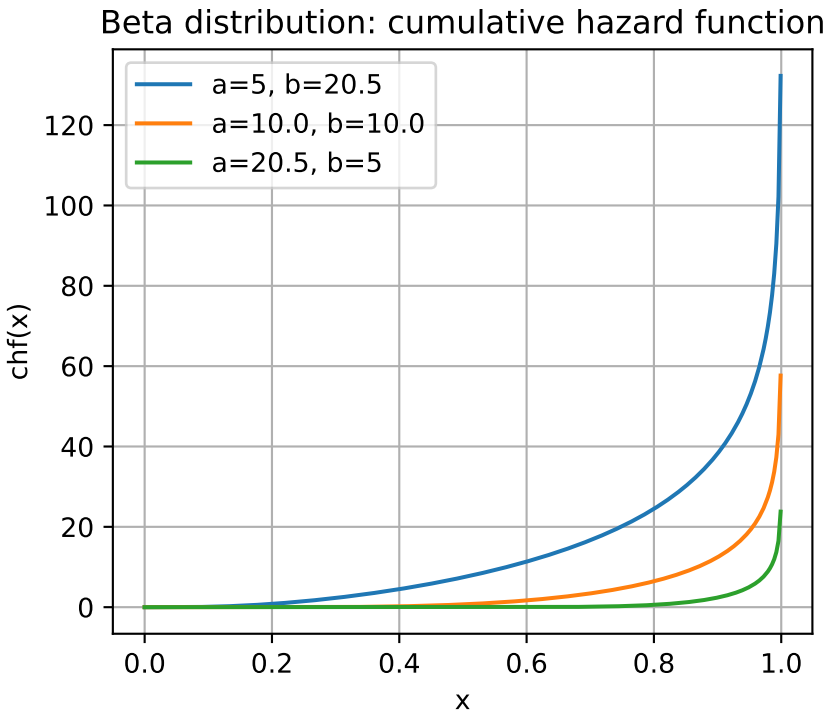

18.1.7.6 Quantile function (qtf)

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07_DistPlotContinuous.py, and the XML code in the file D07_DistPlotContinuous.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        ylim = None
        target = 'qtf' # pdf, cdf, 'sf', 'hf', 'chf', 'qtf', 'isf'

        Title = 'Beta distribution'
        a = [5, 10.0, 20.5]
        b = [20.5, 10.0, 5]
        xlim = [0, 0.999]
        if target=='hf': ylim=[0, 100]

        dlist = []
        ltext = []
        for j in range(len(a)):
            dlist.append(dreal.dist_beta(a[j], b[j]))
            ltext.append('a=' + str(a[j]) + ', b=' + str(b[j]))

        DistPlotContinuous(Title = Title, dlist=dlist, xlim = xlim,
            ylim = ylim, target = target, ltext = ltext, marker='o',
            markersize=0)
```

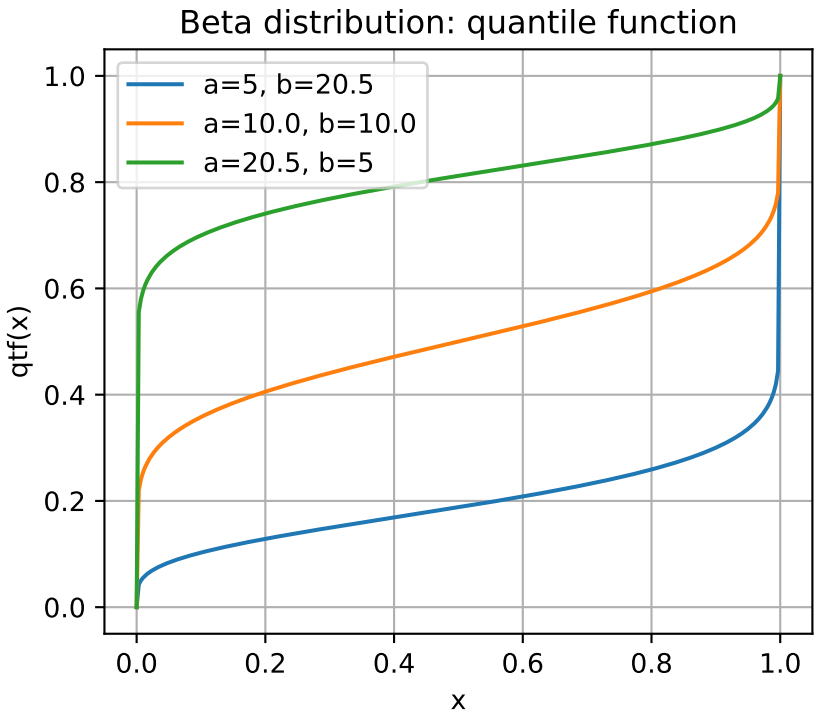

18.1.7.7 Inverse survival function (isf)

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07_DistPlotContinuous.py, and the XML code in the file D07_DistPlotContinuous.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        ylim = None
        target = 'qtf' # pdf, cdf, 'sf', 'hf', 'chf', 'qtf', 'isf'

        Title = 'Beta distribution'
        a = [5, 10.0, 20.5]
        b = [20.5, 10.0, 5]
        xlim = [0, 0.999]
        if target=='hf': ylim=[0, 100]

        dlist = []
        ltext = []
        for j in range(len(a)):
            dlist.append(dreal.dist_beta(a[j], b[j]))
            ltext.append('a=' + str(a[j]) + ', b=' + str(b[j]))

        DistPlotContinuous(Title = Title, dlist=dlist, xlim = xlim,
            ylim = ylim, target = target, ltext = ltext, marker='o',
            markersize=0)
```

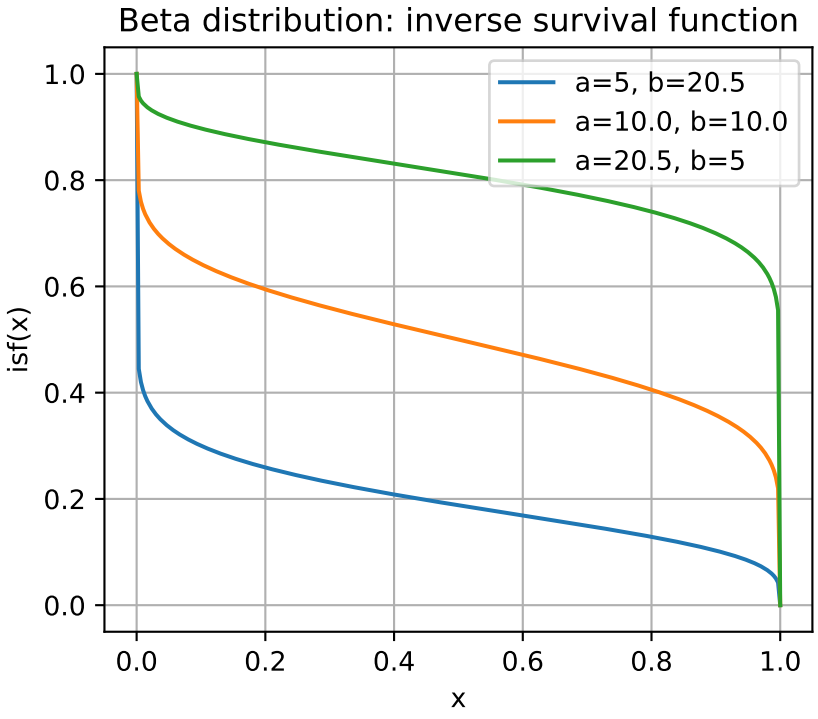

18.1.8 Plots of discrete distribution functions

18.1.8.1 Probability mass function (pmf)

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D08_DistPlotDiscrete.py, and the XML code in the file D08_DistPlotDiscrete.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        ylim = None

        Title = 'Poisson distribution'
        target = 'pmf' # pmf, cdf, 'sf', 'hf', 'chf', 'qtf', 'isf'
        mu = [1, 4, 10]
        xlim = [0.0, 20.0]
        ylim = None
        if target=='qtf': ylim=[0, 20]

        dlist = []
        ltext = []
        for j in range(len(mu)):
            dlist.append(dreal.dist_poisson(mu[j]))
            ltext.append('mu=' + str(mu[j]))
        DistPlotDiscrete(Title = Title, dlist=dlist, xlim = xlim,  ylim = ylim,
            target = target, ltext = ltext, lattice=True, marker='o',
            markersize=3, vertical_lines=True)
```

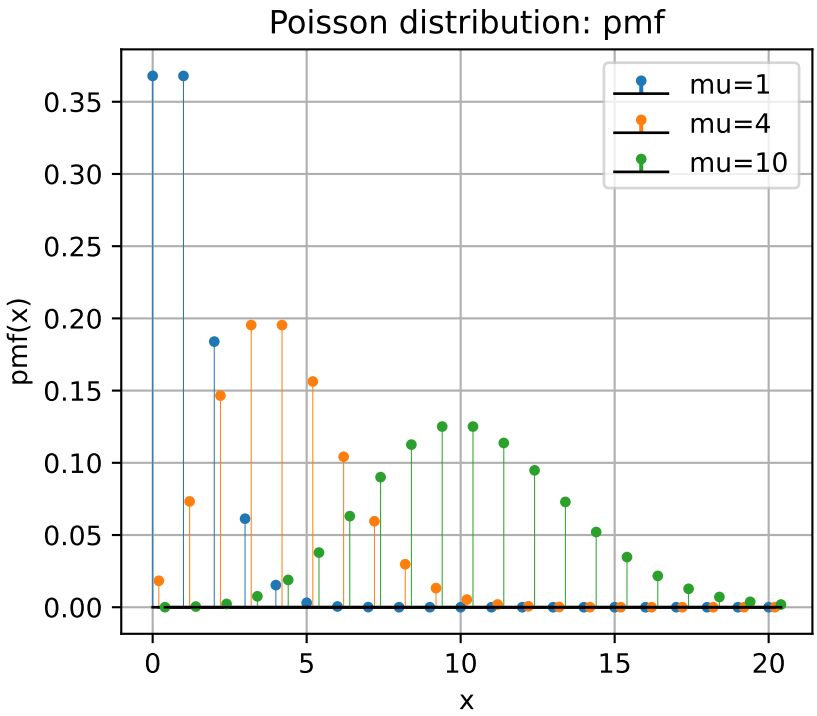

18.1.8.2 Cumulative distribution function (cdf)

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D08_DistPlotDiscrete.py, and the XML code in the file D08_DistPlotDiscrete.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        ylim = None

        Title = 'Poisson distribution'
        target = 'cdf' # pmf, cdf, 'sf', 'hf', 'chf', 'qtf', 'isf'
        mu = [1, 4, 10]
        xlim = [0.0, 20.0]
        ylim = None
        if target=='qtf': ylim=[0, 20]

        dlist = []
        ltext = []
        for j in range(len(mu)):
            dlist.append(dreal.dist_poisson(mu[j]))
            ltext.append('mu=' + str(mu[j]))
        DistPlotDiscrete(Title = Title, dlist=dlist, xlim = xlim,  ylim = ylim,
            target = target, ltext = ltext, lattice=True, marker='o',
            markersize=3, vertical_lines=True)
```

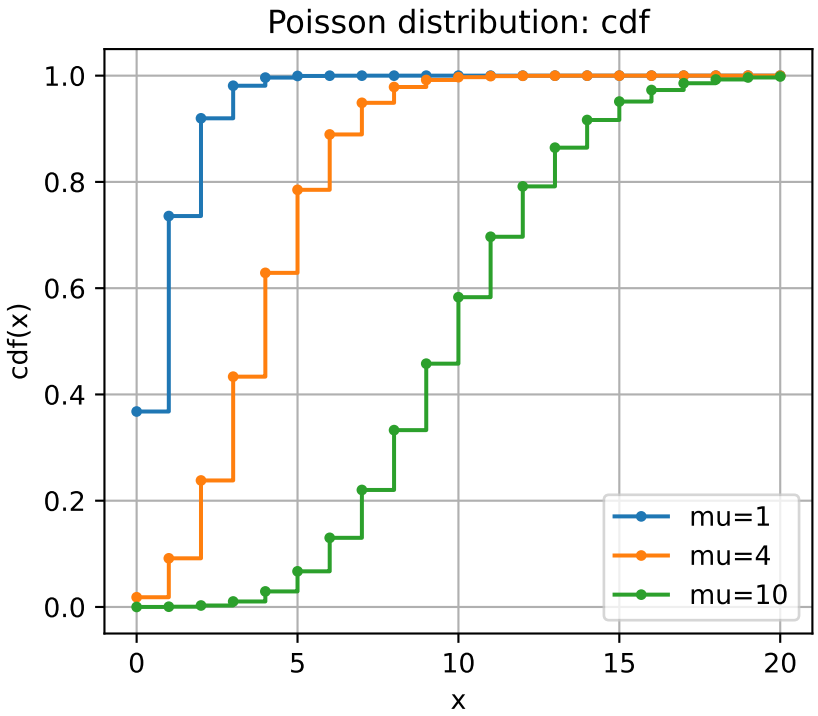

18.1.8.3 Survival function (sf)

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D08_DistPlotDiscrete.py, and the XML code in the file D08_DistPlotDiscrete.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        ylim = None

        Title = 'Poisson distribution'
        target = 'sf' # pmf, cdf, 'sf', 'hf', 'chf', 'qtf', 'isf'
        mu = [1, 4, 10]
        xlim = [0.0, 20.0]
        ylim = None
        if target=='qtf': ylim=[0, 20]

        dlist = []
        ltext = []
        for j in range(len(mu)):
            dlist.append(dreal.dist_poisson(mu[j]))
            ltext.append('mu=' + str(mu[j]))
        DistPlotDiscrete(Title = Title, dlist=dlist, xlim = xlim,  ylim = ylim,
            target = target, ltext = ltext, lattice=True, marker='o',
            markersize=3, vertical_lines=True)
```

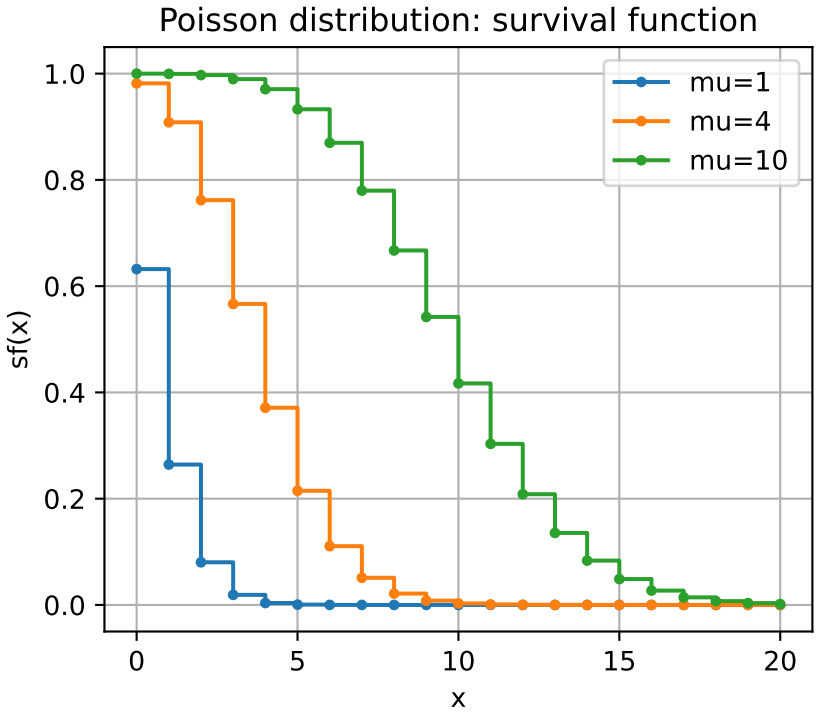

18.1.8.4 Hazard function (hf)

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D08_DistPlotDiscrete.py, and the XML code in the file D08_DistPlotDiscrete.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        ylim = None

        Title = 'Poisson distribution'
        target = 'hf' # pmf, cdf, 'sf', 'hf', 'chf', 'qtf', 'isf'
        mu = [1, 4, 10]
        xlim = [0.0, 20.0]
        ylim = None
        if target=='qtf': ylim=[0, 20]

        dlist = []
        ltext = []
        for j in range(len(mu)):
            dlist.append(dreal.dist_poisson(mu[j]))
            ltext.append('mu=' + str(mu[j]))
        DistPlotDiscrete(Title = Title, dlist=dlist, xlim = xlim,  ylim = ylim,
            target = target, ltext = ltext, lattice=True, marker='o',
            markersize=3, vertical_lines=True)
```

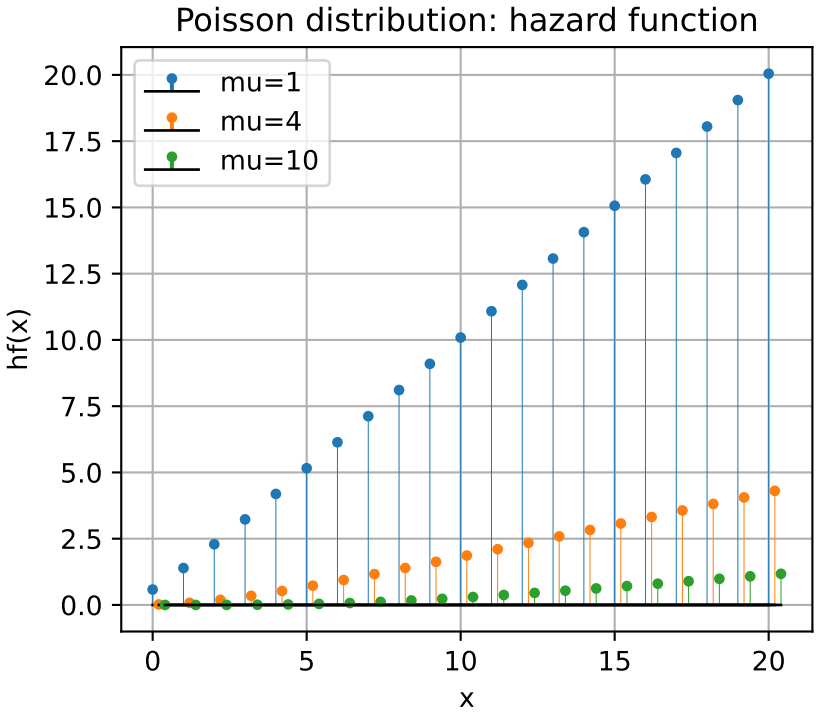

18.1.8.5 Cumulative hazard function (chf)

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D08_DistPlotDiscrete.py, and the XML code in the file D08_DistPlotDiscrete.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        ylim = None

        Title = 'Poisson distribution'
        target = 'chf' # pmf, cdf, 'sf', 'hf', 'chf', 'qtf', 'isf'
        mu = [1, 4, 10]
        xlim = [0.0, 20.0]
        ylim = None
        if target=='qtf': ylim=[0, 20]

        dlist = []
        ltext = []
        for j in range(len(mu)):
            dlist.append(dreal.dist_poisson(mu[j]))
            ltext.append('mu=' + str(mu[j]))
        DistPlotDiscrete(Title = Title, dlist=dlist, xlim = xlim,  ylim = ylim,
            target = target, ltext = ltext, lattice=True, marker='o',
            markersize=3, vertical_lines=True)
```

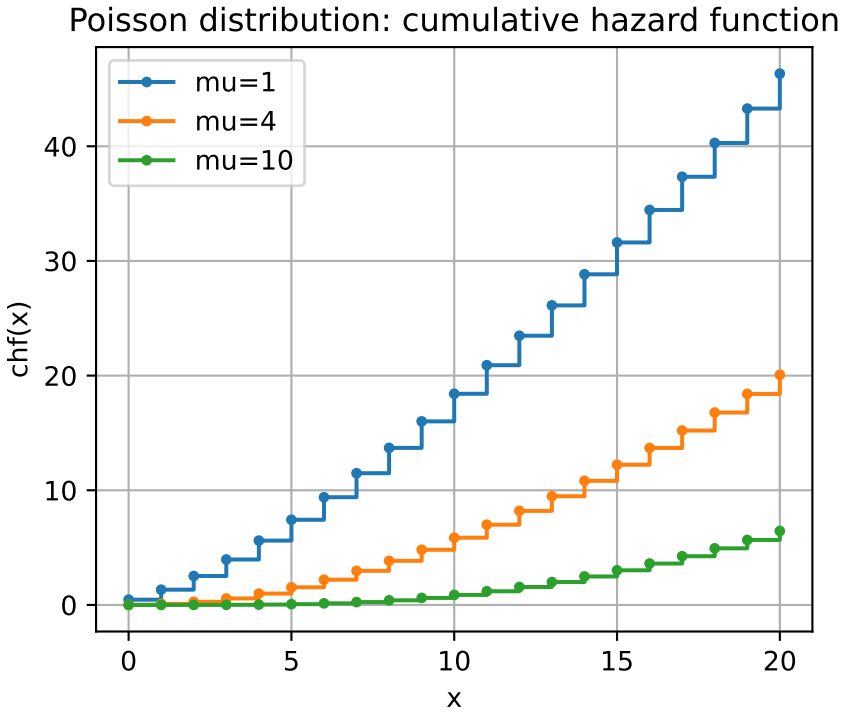

18.1.8.6 Quantile function (qtf)

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D08_DistPlotDiscrete.py, and the XML code in the file D08_DistPlotDiscrete.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        ylim = None

        Title = 'Poisson distribution'
        target = 'qtf' # pmf, cdf, 'sf', 'hf', 'chf', 'qtf', 'isf'
        mu = [1, 4, 10]
        xlim = [0.0, 20.0]
        ylim = None
        if target=='qtf': ylim=[0, 20]

        dlist = []
        ltext = []
        for j in range(len(mu)):
            dlist.append(dreal.dist_poisson(mu[j]))
            ltext.append('mu=' + str(mu[j]))
        DistPlotDiscrete(Title = Title, dlist=dlist, xlim = xlim,  ylim = ylim,
            target = target, ltext = ltext, lattice=True, marker='o',
            markersize=0, vertical_lines=True)
```

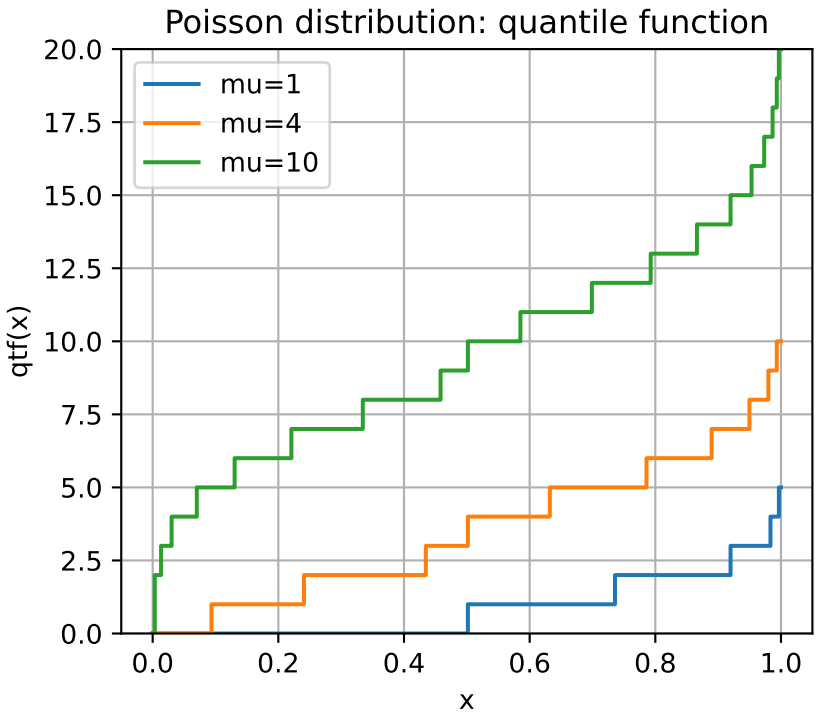

18.1.8.7 Inverse survival function (isf)

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D08_DistPlotDiscrete.py, and the XML code in the file D08_DistPlotDiscrete.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        ylim = None

        Title = 'Poisson distribution'
        target = 'isf' # pmf, cdf, 'sf', 'hf', 'chf', 'qtf', 'isf'
        mu = [1, 4, 10]
        xlim = [0.0, 20.0]
        ylim = None
        if target=='qtf': ylim=[0, 20]

        dlist = []
        ltext = []
        for j in range(len(mu)):
            dlist.append(dreal.dist_poisson(mu[j]))
            ltext.append('mu=' + str(mu[j]))
        DistPlotDiscrete(Title = Title, dlist=dlist, xlim = xlim,  ylim = ylim,
            target = target, ltext = ltext, lattice=True, marker='o',
            markersize=0, vertical_lines=True)
```

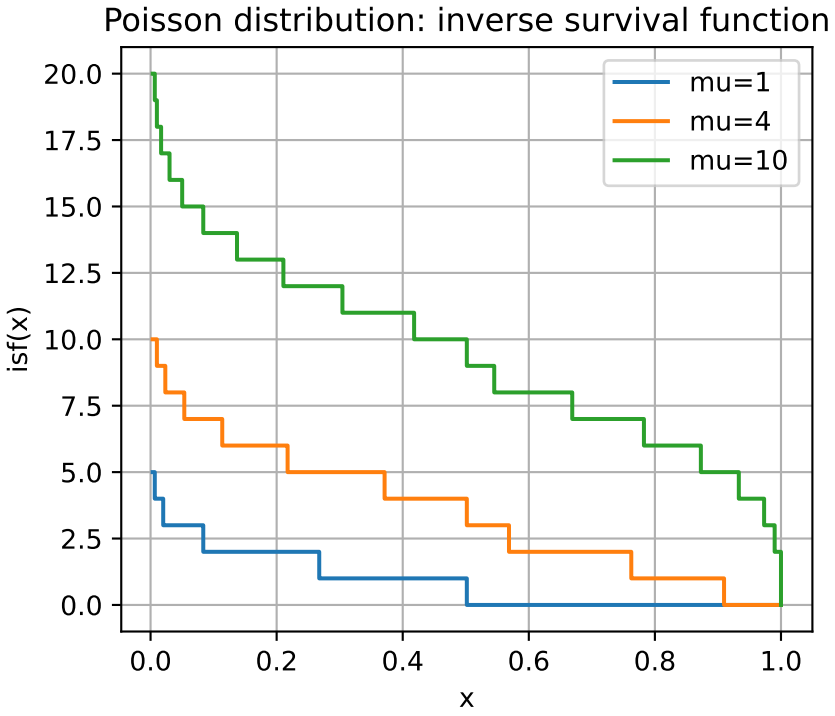

18.1.9 Mpmath-inspired functions plots in 2D

The plots discussed here show some possibilities to deal with not-so-well-behaved plots, i.e plots with real input, but (domain-wise) complex output, plots with singularities, and plots which grow very rapidly. The functions which are used here have been modified from Mpmath (see https://mpmath.readthedocs.io/en/stable/plotting.html).

These plots can use both Python-only contexts like `mpm` as well as `FixedPrec` contexts like `math53`, however, results may differ since the `FixedPrec` contexts enforce strict typing, whereas the Python-only contexts do not.

18.1.9.1 Simultaneous plot of sin and cos

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D09_FuncPlot2d.py, and the XML code in the file D09_FuncPlot2d.2D.xml.

To produce the figure as shown below, using the `mpm` context, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        FuncPlot2d(ctx=mpm, f=[mpm.cos, mpm.sin], xlim=[-4, 4],
            Title = 'Plot2dCosSin')
```

To produce the figure as shown below, using the `math53` context, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        FuncPlot2d(ctx=math53, f=[ctx.cos, ctx.sin], xlim=[-4, 4],
            Title = 'Plot2dCosSin')
```

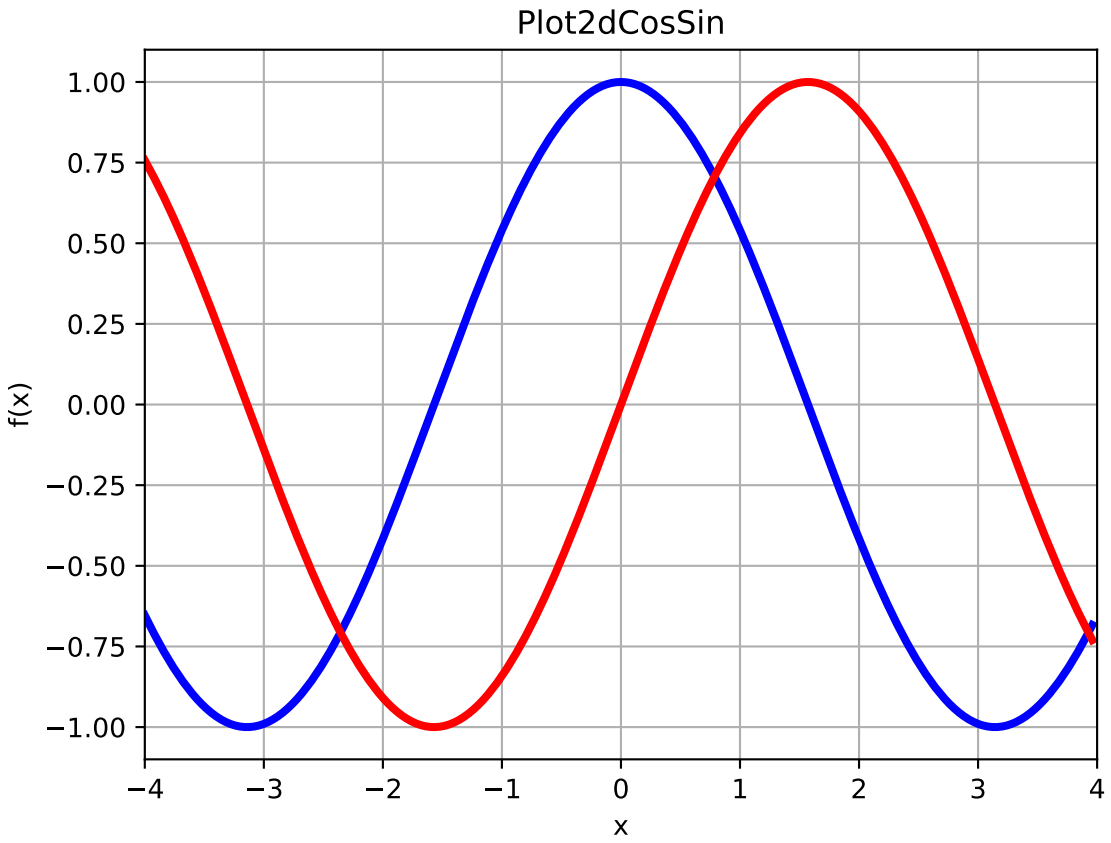

18.1.9.2 Simultaneous plots of asin and acos, for mpm and math53

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D09_FuncPlot2d.py.

To produce the figure as shown below, using the `mpm` context, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        FuncPlot2d(ctx=mpm, f=[mpm.acos, mpm.asin], xlim=[-2, 2],
            Title = 'Simultaneous plot of asin an acos, using mpm')
```

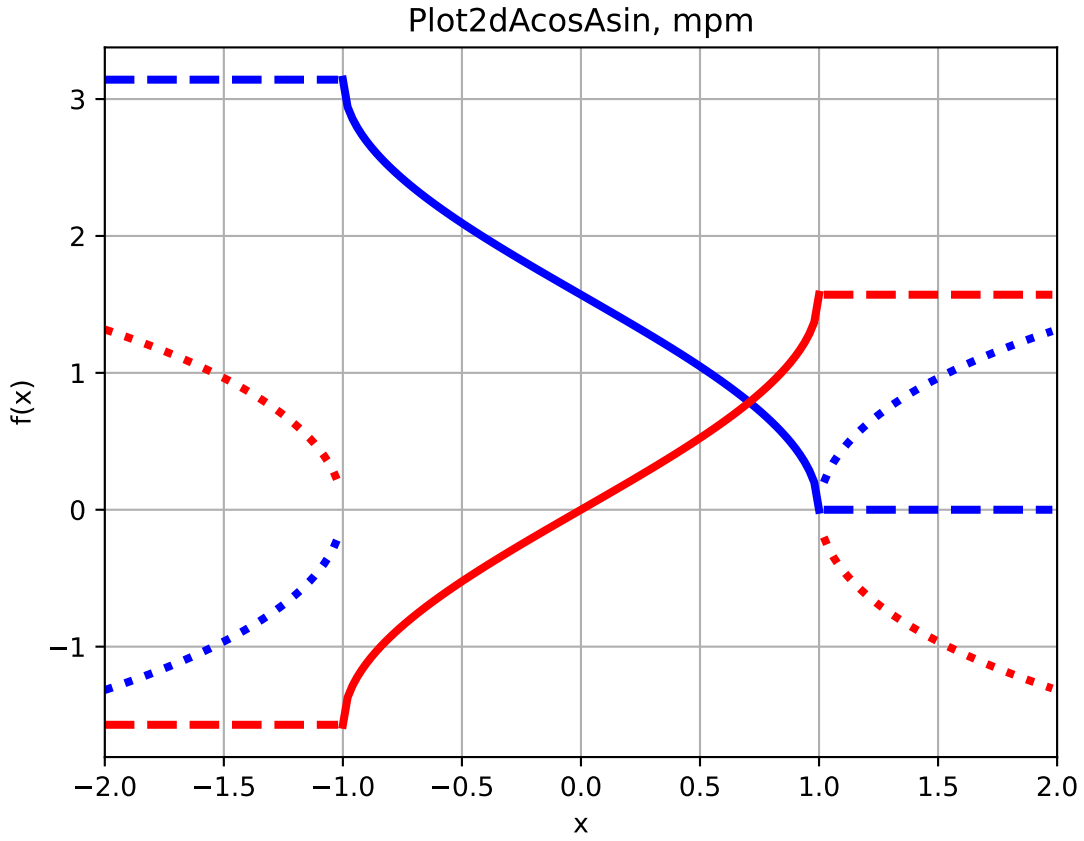

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        FuncPlot2d(ctx=math53, f=[ctx.acos, ctx.asin], xlim=[-2, 2],
            Title = 'Simultaneous plot of asin and acos, using math53')
```

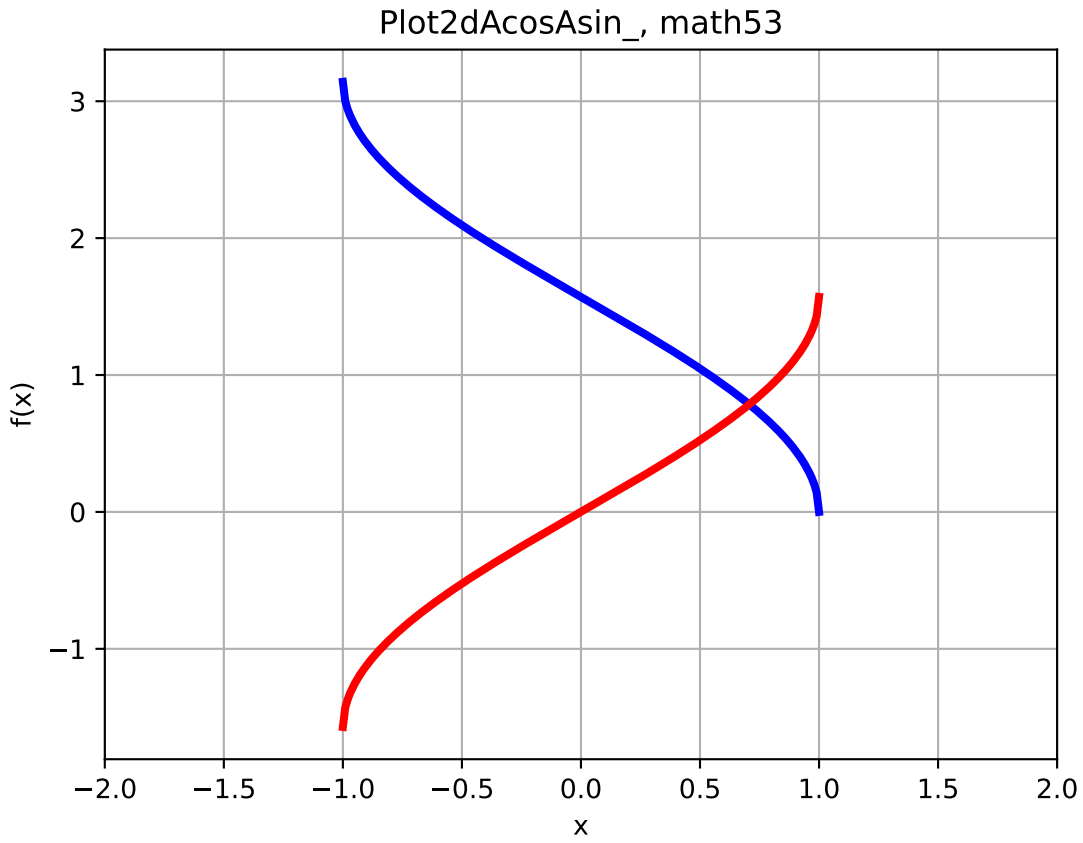
Plot2dAcosAsin_, math53
f(x)
x
3
2
1
0
−1
−2.0
−1.5
−1.0
−0.5
0.0
0.5
1.0
1.5
2.0

18.1.9.3 Plot of cotangent without singularities specified

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D09_FuncPlot2d.py.

If we plot the `cotangent` without specifying the singularities, we get the results shown below:

To produce the left figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        FuncPlot2d(ctx=mpm, f=mpm.cot, xlim=[-5, 5], ylim=[-5, 5],
            Title = 'Cotangent, singularities not specified, Mpm')
```

To produce the right figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        FuncPlot2d(ctx=math53, f=ctx.cot, xlim=[-5, 5], ylim=[-5, 5],
            Title = 'Cotangent, singularities not specified, Math53')
```

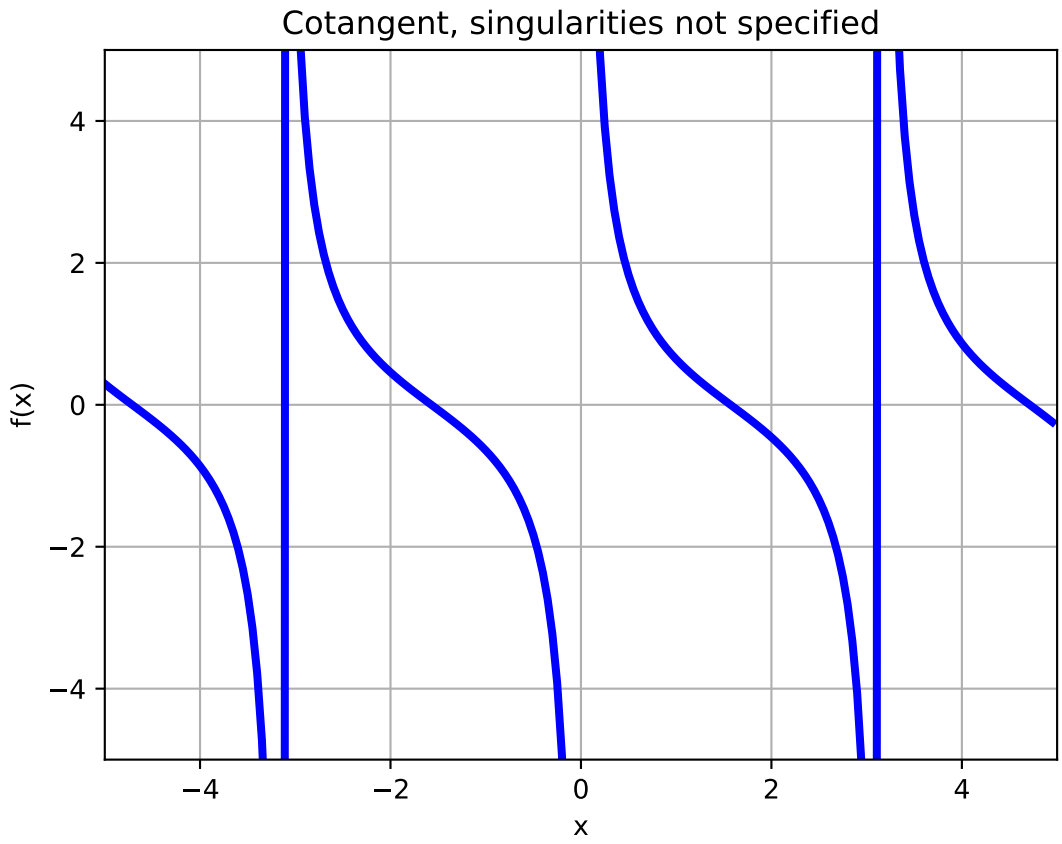

18.1.9.4 Plot of cotangent with singularities specified

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D09_FuncPlot2d.py.

If we plot the `cotangent` and specify the singularities, we get the results shown below:

To produce the left figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        FuncPlot2d(ctx=mpm, f=mpm.cot, xlim=[-5, 5], ylim=[-5, 5],
            singularities=[-mpm.pi, 0, mpm.pi],
            Title = 'Cotangent, singularities specified, mpm')
```

To produce the right figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        FuncPlot2d(ctx=math53, f=ctx.cot, xlim=[-5, 5], ylim=[-5, 5],
            singularities=[-ctx.pi(), 0, ctx.pi()],
            Title = 'Cotangent, singularities specified, math53')
```

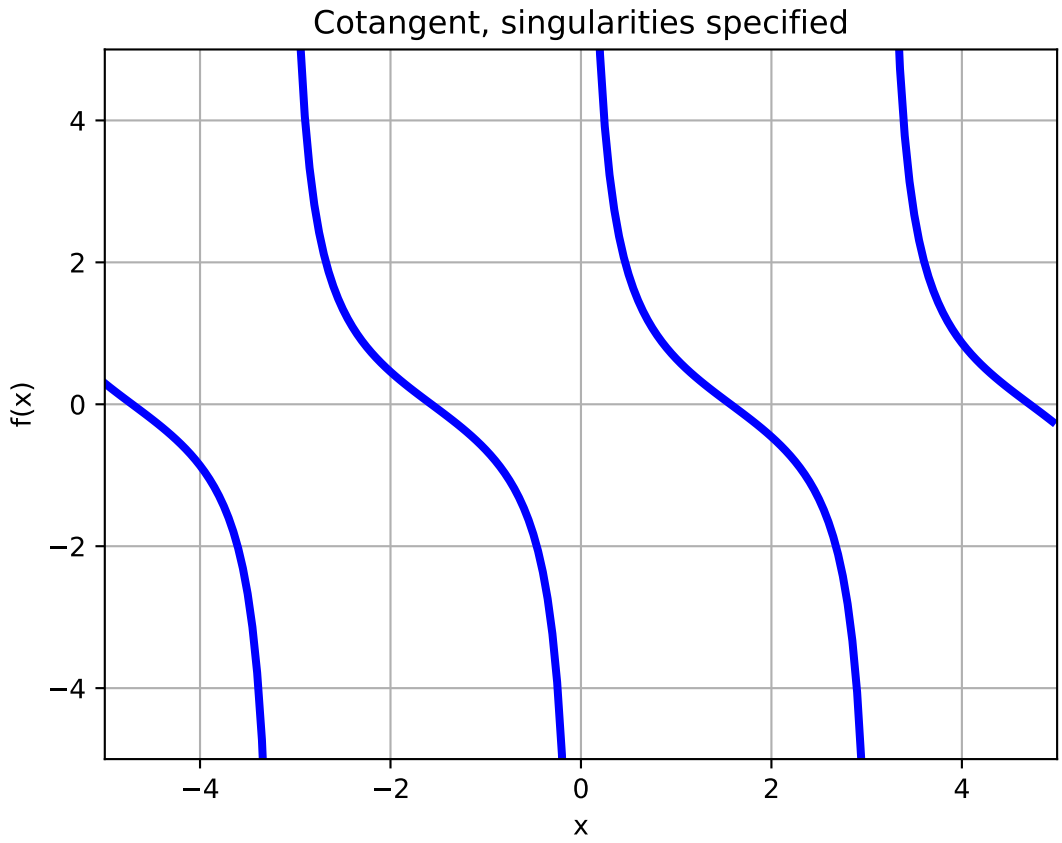

18.2 Basic curves

18.2.1 Regular convex polygon

A regular polygon is a polygon that is direct equiangular (all angles are equal in measure) and equilateral (all sides have the same length). Regular polygons may be either convex, star or skew. In the limit, a sequence of regular polygons with an increasing number of sides approximates a circle.

$$r = \frac{a}{\cos\left(t - \alpha/2 - \alpha\,\lfloor\theta/\alpha\rfloor\right)}, \quad \text{where } \alpha = \frac{2\pi}{n}.$$

$$x(t) = r\cos(t)),$$

$$y(t) = r\sin(t).$$

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_RegularConvexPolygon.py, and the XML code in the file D01_RegularConvexPolygon.2D.xml.

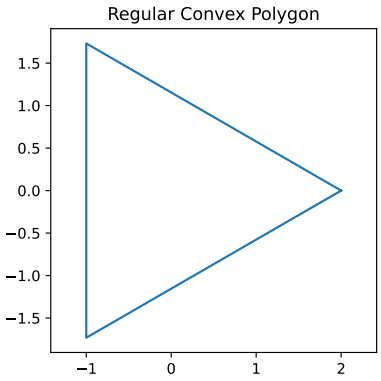

See also: https://en.wikipedia.org/wiki/Star_polygon

See also: https://mathcurve.com/polyedres/regulier/polygoneregulier.shtml

See also: https://mathcurve.com/courbes2d/goursat/goursat.shtml

See also: https://mathcurve.com/courbes3d.gb/polygramme/polygramme.shtml

See also: https://mathcurve.com/courbes3d.gb/billardcylindrique/billardcylindrique.shtml

18.2.2 Circle

A circle is the set of points in a plane that are equidistant from a given point O. The parametric equations for a circle of radius a can be given by

$$x(t) = a\cos(t)),$$

$$y(t) = a\sin(t).$$

See also Wikipedia [1359], MathWorld [1035], MathCurve [303].

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02_Circle.py, and the XML code in the file D02_Circle.2D.xml.

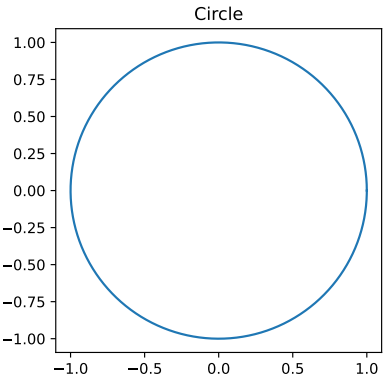

18.2.3 Ellipse

An ellipse is a plane curve surrounding two focal points, such that for all points on the curve, the sum of the two distances to the focal points is a constant. The parametric equations of a standard ellipse centered at the origin with width $2a$ and height $2b$ can be given by (with $0 \leq t < 2\pi$):

$$x(t) = a\cos(t)),$$

$$y(t) = b\sin(t).$$

Assuming $a \geq b$, the focal points are $(\pm\sqrt{a^2 - b^2}, 0)$.

See also Wikipedia [1364], MathWorld [1037], MathCurve [305].

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03_Ellipse.py, and the XML code in the file D03_Ellipse.2D.xml.

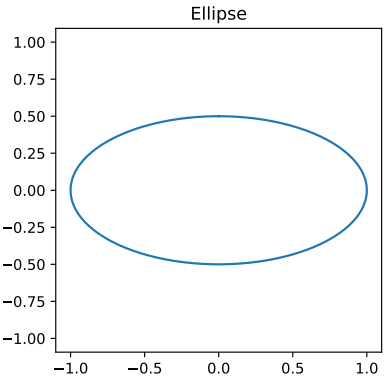

18.2.4 Parabola

A parabola is a plane curve which is mirror-symmetrical and is approximately U-shaped. It fits several superficially different mathematical descriptions, which can all be proved to define exactly the same curves.

The graph of a quadratic function $y = ax^2 + bx + c$ (with $a \neq 0$) is a parabola with its axis parallel to the y-axis. Conversely, every such parabola is the graph of a quadratic function.

The surface of revolution obtained by rotating a parabola about its axis of symmetry is called a paraboloid.

See also: https://mathworld.wolfram.com/Parabola.html

See also: https://en.wikipedia.org/wiki/Parabola

In polar coordinates, the equation of a parabola with parameter a and center (0, 0) is given by $r(t) = -\dfrac{2a}{1 + \cos(t)}$. It can also be written parametrically as

$$x(t) = at^2,$$

$$y(t) = 2at.$$

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04_Parabola.py, and the XML code in the file D04_Parabola.2D.xml.

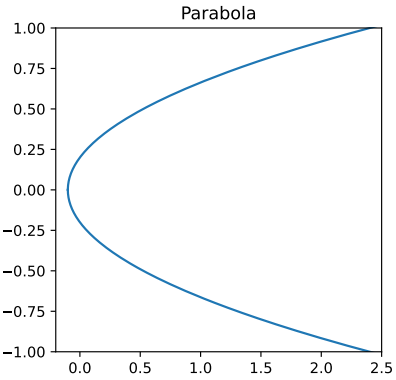

18.2.5 Hyperbola

In polar coordinates, the equation of a hyperbola centered at the origin (i.e., with $x_0 = y_0 = 0$) is $r2(t) = \dfrac{a^2 b^2}{b^2 \cos^2(t) - a^2 \sin^2(t)}$.

Parametric equations for the right branch of a hyperbola are given by

$$x(t) = a \cosh(t),$$

$$y(t) = b \sinh(t),$$

which ranges over the right branch of the hyperbola.

A parametric representation which ranges over both branches of the hyperbola is

$$x(t) = a \sec(t),$$

$$y(t) = b \tan(t),$$

with $t \in (-\pi, \pi)$ and discontinuities at $\pm\pi/2$.

See also: https://mathworld.wolfram.com/Hyperbola.html

See also: https://mathworld.wolfram.com/ConicSection.html

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05_Hyperbola.py, and the XML code in the file D05_Hyperbola.2D.xml.

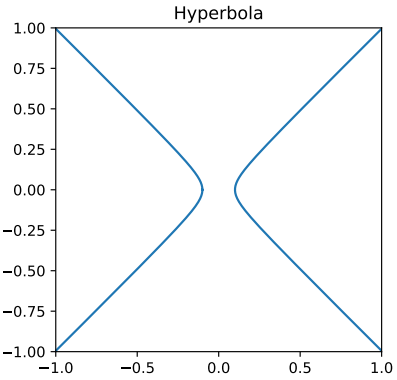

18.2.6 Cycloid

The cycloid is the locus of a point on the rim of a circle of radius a rolling along a straight line. If the cycloid has a cusp at the origin and its humps are oriented upward, its parametric equation is

$$x(t) = a(t - \sin(t)),$$

$$y(t) = a(t - \cos(t)).$$

See also Wikipedia [1363], MathWorld [1036], MathCurve [304].

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06_Cycloid.py, and the XML code in the file D06_Cycloid.2D.xml.

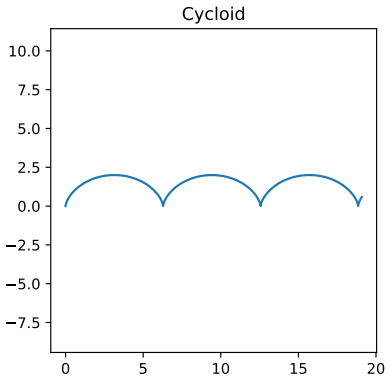

18.2.7 Trochoid

A trochoid is the locus of a point at a distance b from the center of a circle of radius a rolling on a fixed line. A trochoid has parametric equations

$$x(t) = at - b\sin(t),$$

$$y(t) = at - b\cos(t)).$$

If $b < a$, the trochoid is known as a curtate cycloid; if $b = a$, it is a cycloid; and if $b > a$, the curve is a prolate cycloid.

See also Wikipedia [1387], MathWorld [1048], MathCurve [324].

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07_Trochoid.py, and the XML code in the file D07_Trochoid.2D.xml.

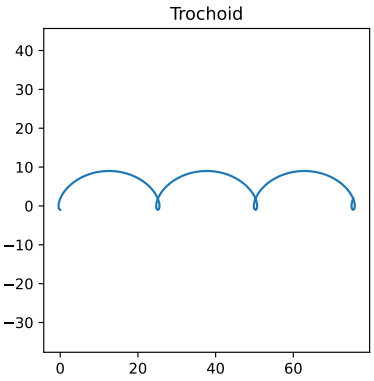

18.2.8 Cardioid

In geometry, a cardioid is a plane curve traced by a point on the perimeter of a circle that is rolling around a fixed circle of the same radius.

The polar equation is given by

$$r = a(1 - \cos(\theta)).$$

See also: Wikipedia [1392], MathWorld [1051]

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D08_Cardioid.py, and the XML code in the file D08_Cardioid.2D.xml.

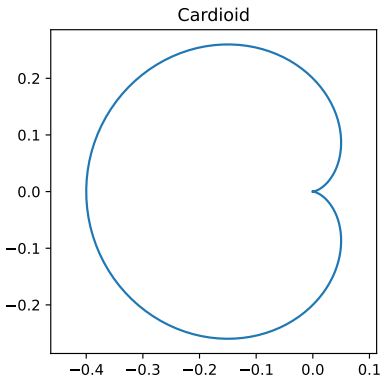

18.2.9 Limaçon curve

Returns the curve given by the polar equation

$$r = b + a\cos(\theta).$$

See also: see also Wikipedia [1406], MathWorld [1058]

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D09_LimaconCurve.py, and the XML code in the file D09_LimaconCurve.2D.xml.

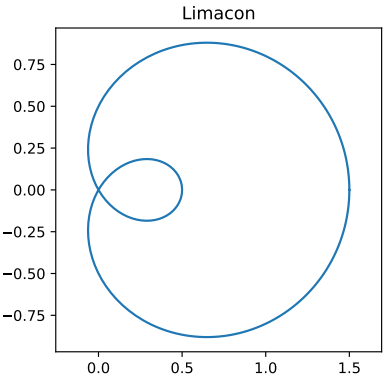

18.2.10 Conchoid of de Sluze

Returns the curve given by the polar equation

$$r = \sec(\theta) + a\cos(\theta).$$

See also: see also Wikipedia [1394], MathWorld [1052]

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D10_ConchoidOfDeSluze.py, and the XML code in the file D10_ConchoidOfDeSluze.2D.xml.

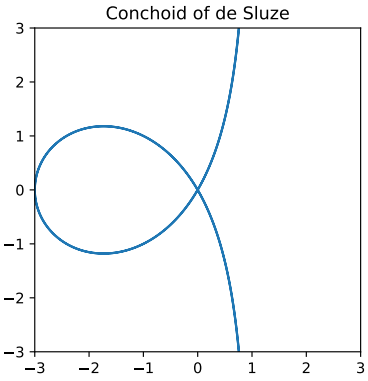

18.2.11 Freeth's Nephroid

The curve has the polar equation

$$r = a\left[1 + 2\sin\left(\tfrac{1}{2}\theta\right)\right]$$

See also: Wikipedia [1401], MathWorld [1056]

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D11_FreethNephroid.py, and the XML code in the file D11_FreethNephroid.2D.xml.

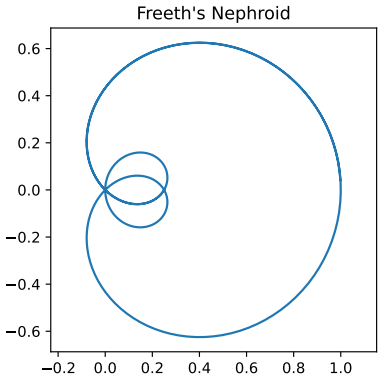

18.2.12 Strophoid

The name strophoid means “belt with a twist”. The polar form for a general strophoid is

$$r = \frac{b\sin(a - 2\theta)}{\sin(a - \theta)}$$

See also: Wikipedia [1412], MathWorld [1062]

A special cases is the right strophoid with $a = \pi/2$.

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D12_Strophoid.py, and the XML code in the file D12_Strophoid.2D.xml.

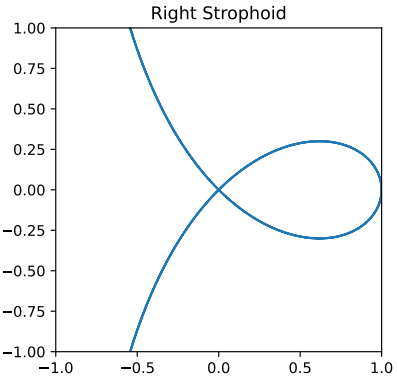

18.2.13 Cycloid of Ceva

A curve with the polar form

$$r = 1 + 2\cos(2\theta).$$

See also: Wikipedia [1395], MathWorld [1053]

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D13_CycloidOfCeva.py, and the XML code in the file D13_CycloidOfCeva.2D.xml.

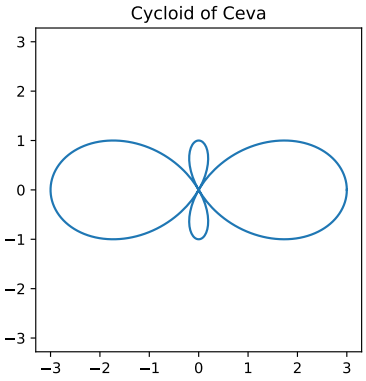

18.2.14 Lemniscate of Gerono

This curve is also known as Eight curve. It has parametric equations

$$x(t) = a \sin(t),$$

$$y(t) = x(t) \cos(t)).$$

See also Wikipedia [1378], MathWorld [1045], MathCurve [316].

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D14_LemniscateOfGerono.py, and the XML code in the file D14_LemniscateOfGerono.2D.xml.

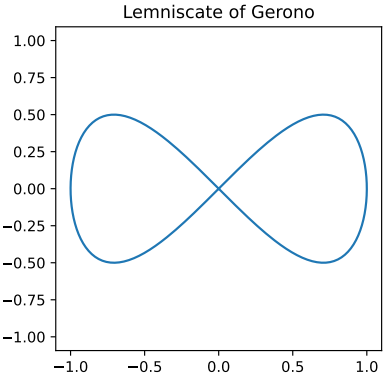

18.2.15 Lemniscate of Bernoulli

The lemniscate of Bernoulli is a polar curve defined as the locus of points such that the the product of distances from two fixed points $(-a, 0)$ and $(a, 0)$ is a constant a^2. It has parametric equations

$$x(t) = \frac{a\cos(t)}{1 + \sin^2(t)},$$

$$y(t) = x(t)\sin(t)).$$

See also Wikipedia [1377], MathWorld [1044], MathCurve [315].

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D15_LemniscateOfBernoulli.py, and the XML code in the file D15_LemniscateOfBernoulli.2D.xml.

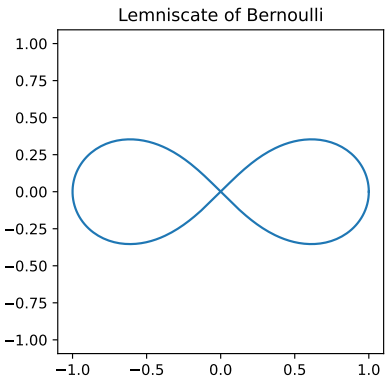

18.3 Spirals

18.3.1 Archimedes' spiral

The parametric equations of Archimedes' Spiral are

$$r(t) = at,$$

$$x(t) = r\cos(t),$$

$$y(t) = r\sin(t).$$

Changing the parameter a controls the distance between loops.

See also Wikipedia [1390], MathWorld [1049], MathCurve [300].

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_ArchimedesSpiral.py, and the XML code in the file D01_ArchimedesSpiral.2D.xml.

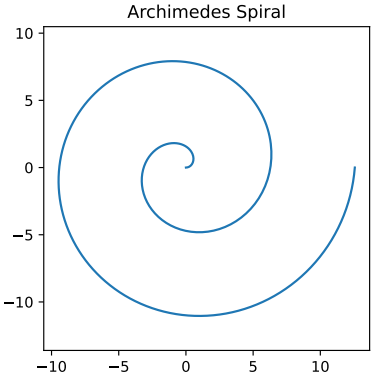

18.3.2 Fermat's spiral

The parametric equations of Fermat' spiral are

$$r(t) = \pm a\sqrt{t},$$

$$x(t) = r\cos(t),$$

$$y(t) = r\sin(t).$$

Changing the parameter a controls the distance between loops.

See also Wikipedia [1400], MathWorld [1055], MathCurve [1400].

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02_FermatSpiral.py, and the XML code in the file D02_FermatSpiral.2D.xml.

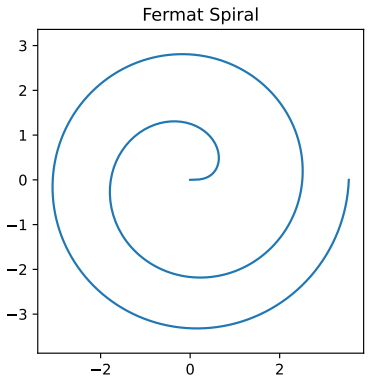

18.3.3 Hyperbolic Spiral

The parametric equations of the hyperbolic spiral are

$$r(t) = \frac{a}{t},$$

$$x(t) = r\cos(t),$$

$$y(t) = r\sin(t).$$

Changing the parameter a controls the distance between loops.

See also Wikipedia [1404], MathWorld [1057], MathCurve [311].

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03_HyperbolicSpiral.py, and the XML code in the file D03_HyperbolicSpiral.2D.xml.

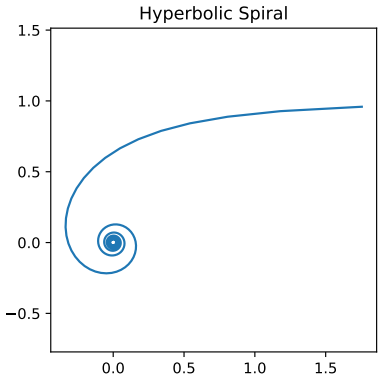

18.3.4 Lituus

The parametric equations of the Lituus are

$$r(t) = \frac{a}{\sqrt{t}},$$

$$x(t) = r\cos(t),$$

$$y(t) = r\sin(t).$$

Changing the parameter a controls the distance between loops.

See also Wikipedia [1407], MathWorld [1059], MathCurve [319].

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04_Lituus.py, and the XML code in the file D04_Lituus.2D.xml.

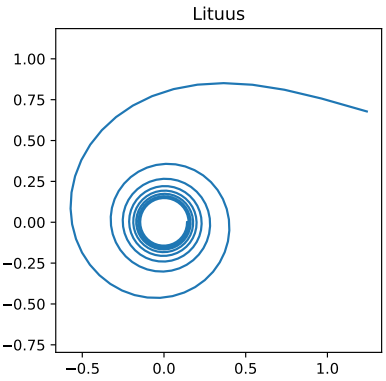

18.3.5 Logarithmic Spiral

The parametric equations of the logarithmic spiral are

$$r(t) = a\exp(kt),$$

$$x(t) = r\cos(t),$$

$$y(t) = r\sin(t).$$

where $a > 0$ and $k \neq 0$ are real constants.

See also Wikipedia [1408], MathWorld [1060], MathCurve [320].

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05_LogarithmicSpiral.py, and the XML code in the file D05_LogarithmicSpiral.2D.xml.

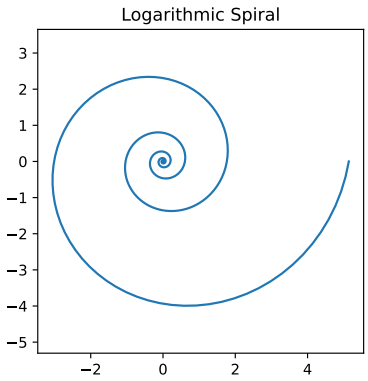

18.3.6 Poinsot's Spiral

The parametric equations of the Poinsot spiral are

$$r(t) = \frac{a}{\alpha \cosh(kt) + \beta \sinh(kt)}, \quad \text{with } \alpha^2 + \beta^2 \neq 0.$$

$$x(t) = r \cos(t),$$

$$y(t) = r \sin(t).$$

where $a > 0$ and $k \neq 0$ are real constants.

See also Wikipedia [1441], MathWorld [1072], MathCurve [330].

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06_PoinsotSpiral.py, and the XML code in the file D06_PoinsotSpiral.2D.xml.

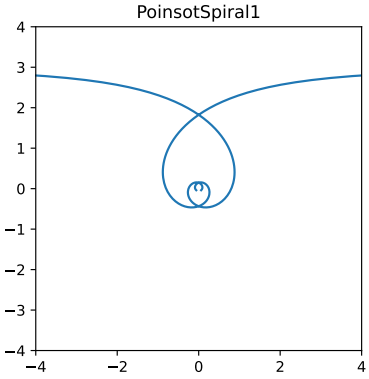

18.3.7 Cotes's spiral

The shape of spirals in the family depends on the parameters. The curves in polar coordinates, $(r, \theta), r > 0$ are defined by one of the following five equations:

$$\frac{1}{r} = \begin{cases} A\cosh(k\theta + \varepsilon) \\ A\exp(k\theta + \varepsilon) \\ A\sinh(k\theta + \varepsilon) \\ A(k\theta + \varepsilon) \\ A\cos(k\theta + \varepsilon) \end{cases}$$

$A > 0$, $k > 0$ and ε are arbitrary real constants. A determines the size, k determines the shape, and ε determines the angular position of the spiral.

The first and third forms are Poinsot's spirals; the second is the logarithmic spiral; the fourth is the hyperbolic spiral; the fifth is the epispiral.

See also Wikipedia [1436], MathWorld [1067].

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07_CotesSpiral.py, and the XML code in the file D07_CotesSpiral.2D.xml.

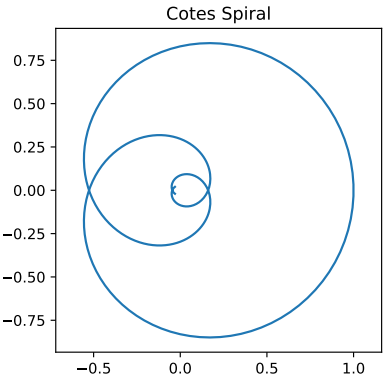

18.3.8 Tanh Spiral

This is a spiral proposed by Bourke [34], and also discussed by Meier [411]. It has the following parametric equations:

$$x(t) = \frac{\sinh(2t)}{\cos(2at) + \cosh(2t)},$$

$$y(t) = \frac{\sin(2at)}{\cos(2at) + \cosh(2t)},$$

with $-\pi/2 \leq t \leq \pi/2$ and $a > 0$ (eg:2).

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D08_TanhSpiral.py, and the XML code in the file D08_TanhSpiral.2D.xml.

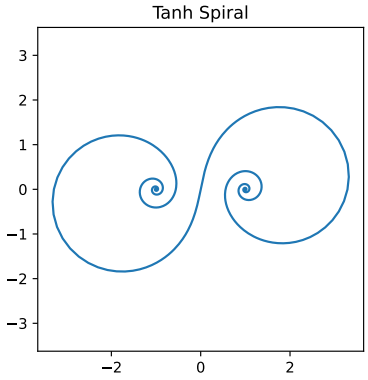

18.3.9 Nielsens Spiral

Nielsen's spiral, also called the sici spiral is the spiral with parametric equations

$$x(t) = a \cdot \mathrm{ci}(t),$$

$$y(t) = a \cdot \mathrm{si}(t),$$

where $\mathrm{ci}(t)$ is the cosine integral and $\mathrm{si}(t)$ is the sine integral.

See also Wikipedia [1440], MathWorld [1071], MathCurve [333].

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D09_NielsenSpiral.py, and the XML code in the file D09_NielsenSpiral.2D.xml.

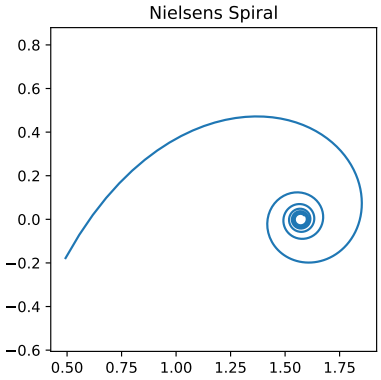

18.3.10 Cornu Spiral

The Cornu spiral, also known as a Euler spiral or clothoid, is the curve generated by a parametric plot of S(t) against C(t). A Cornu spiral has the property that its curvature at any point is proportional to the distance along the spiral, measured from the origin.

$$x(t) = a \cdot C(t),$$

$$y(t) = a \cdot S(t),$$

where $C(t)$ and $S(t)$ are the Fresnel integrals.

See also Wikipedia [1439], MathWorld [1066], MathCurve [326].

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D10_CornuSpiral.py, and the XML code in the file D10_CornuSpiral.2D.xml.

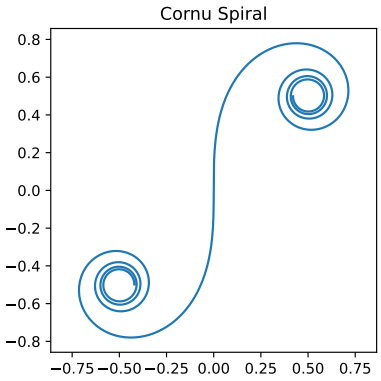

18.4 Decorative curves

18.4.1 Fish curve

The fish curve has the parametric equation

$$x(t) = a\cos(t) - \frac{a\sin^2(t)}{\sqrt{2}},$$

$$y(t) = a\cos(t)\sin(t).$$

See also Wikipedia [1368], MathWorld [1040], MathCurve [309].

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_FishCurve.py, and the XML code in the file D01_FishCurve.2D.xml.

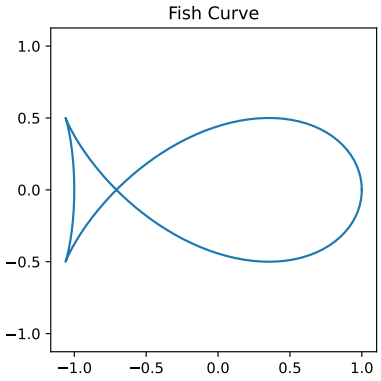

18.4.2 Heart curve

The heart curve has the parametric equation

$$x(t) = 16\sin^3(t),$$

$$y(t) = 13\cos(t) - 5\cos(2t) - 2\cos(3t) - \cos(4t)$$

See also Wikipedia [1370], MathWorld [1041].

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02_HeartCurve.py, and the XML code in the file D02_HeartCurve.2D.xml.

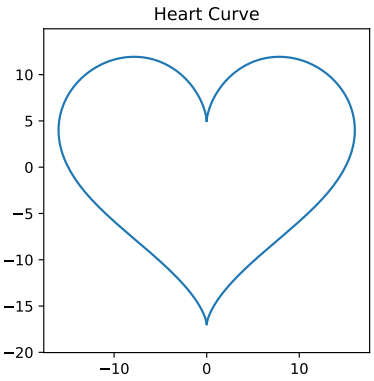

18.4.3 Chrysanthemum curve

The chrysanthemum curve (see Bourke [33]) is given in polar coordinates by the following

$$r = 5(1 + \sin(11t/5)) - 4\sin^4(17t/3)\sin^8(2\cos(3t) - 28t) \quad \text{where } 0 \leq t \leq 21\pi$$

and in Cartesian coordinates

$$x = r\cos(t)$$

$$y = r\sin(t)$$

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03_ChrysanthemumCurve.py, and the XML code in the file D03_ChrysanthemumCurve.2D.xml.

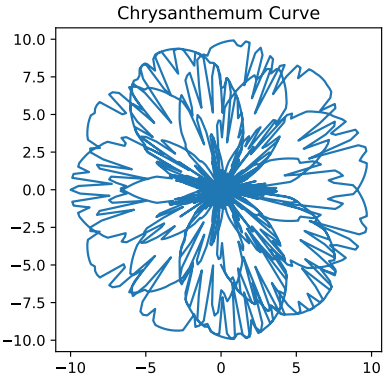

18.4.4 Butterfly curve

The butterfly curve is given in polar coordinates by the following

$$r = \exp(\cos(t)) - 2\cos(4t) - \sin^5(t/12)$$

and in Cartesian coordinates

$$x = r\cos(t)$$

$$y = r\sin(t)$$

See also Wikipedia [1391], MathWorld [1050].

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04_ButterflyCurve.py, and the XML code in the file D04_ButterflyCurve.2D.xml.

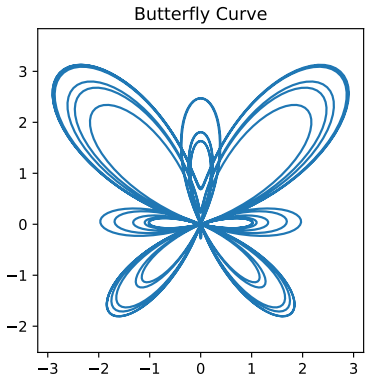

18.5 General curve families

18.5.1 Regular star polygon

There exist infinitely many regular star polytopes in two dimensions, whose Schläfli symbols consist of rational numbers $\{n/m\}$. They are called star polygons and share the same vertex arrangements of the convex regular polygons.

$$r = \frac{a}{\cos\left(t - \alpha/2 - \alpha\,\lfloor\theta/\alpha\rfloor\right)}, \quad \text{where } \alpha = \frac{2m\pi}{n}.$$

$$x(t) = r\cos(t)),$$

$$y(t) = r\sin(t).$$

See also: https://en.wikipedia.org/wiki/Star_polygon

See also: https://mathworld.wolfram.com/StarPolygon.html

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_RegularStarPolygon.py, and the XML code in the file D01_RegularStarPolygon.2D.xml.

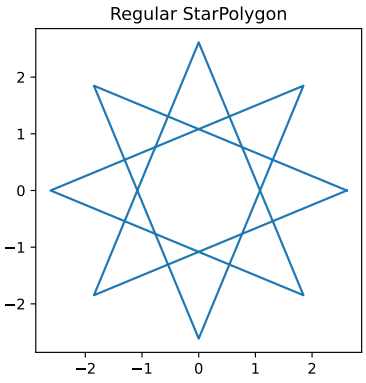

18.5.2 Regular compound polygon (polygram)

The n vertices of the regular polygon being determined, all the associated regular polygons are obtained by joining the vertices from m to m, where m is coprime with n and between 1 and $n/2$. The case $m = 1$ gives the only uncrossed polygon, which is convex.

$$r = \frac{a}{\cos\left(t - \alpha/2 - \alpha\,\lfloor\theta/\alpha\rfloor\right)}, \quad \text{where } \alpha = \frac{2m\pi}{n}.$$

$$x(t) = r\cos(t)),$$

$$y(t) = r\sin(t).$$

See also: https://en.wikipedia.org/wiki/Polygram_(geometry)#Regular_compound_polygons

See also: https://mathworld.wolfram.com/Polygram.html

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02_Polygram.py, and the XML code in the file D02_Polygram.2D.xml.

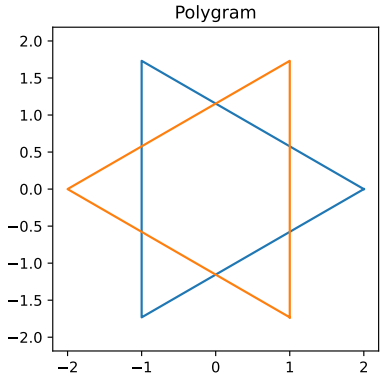

18.5.3 Epicycloid

The epicycloids are the curves described by a point on a circle (C) rolling without slipping on a base circle (C_0), the open disks with boundaries (C) and (C_0) being disjoint. Therefore, they are special cases of epitrochoids. An epicycloid has parametric equations

$$qx(t) = a\left((q+1)\cos(t) - \cos\left((q+1)t\right)\right),$$

$$qy(t) = a\left((q+1)\sin(t) - \sin\left((q+1)t\right)\right).$$

See also Wikipedia [1365], MathWorld [1038], MathCurve [306].

The epicycloids are curves composed of isometric arcs (the arches) joining at cuspidal points (obtained for $t = \dfrac{2\pi}{q}$) in a finite number equal to the numerator of q if q is rational, or in an infinite number otherwise.

When q is rational, $q = \dfrac{n}{m}$, the curve is algebraic and rational (take $u = \tan\left(\dfrac{t}{2m}\right)$ as a parameter).

Its looks like a regular polygon, crossed if $m \geq 2$, with n vertices joined by m points by the curves located outside the circle (C_0).

The notation of simple epicycloid with n cusps (E_n) refers to the case $q = n$, i.e. when there are no crossovers.

Special cases are the cardioid $(q = 1)$, the nephroid $(q = 2)$, and the double cardioid $(q = 1/2)$,

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03_Epicycloid.py, and the XML code in the file D03_Epicycloid.2D.xml.

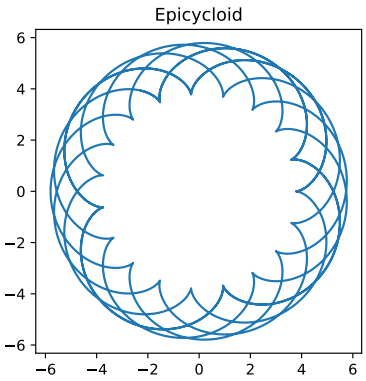

18.5.4 Hypocycloid

The hypocycloids are the curves described by a point on a circle (C) rolling without slipping on, and inside, a base circle (C_0), when the rolling circle is smaller than the fixed one. Therefore, they are special cases of hypotrochoids. A hypocycloid has parametric equations

$$qx(t) = a\left((q-1)\cos(t) - \cos\left((q-1)t\right)\right),$$

$$qy(t) = a\left((q-1)\sin(t) - \sin\left((q-1)t\right)\right).$$

See also Wikipedia [1371], MathWorld [1042], MathCurve [312].

The hypocycloids are curves composed of isometric arcs (the arches) connecting at cuspidal points (obtained for $t = \dfrac{2\pi}{q}$) in a finite number equal to the numerator of q if q is rational, or in an infinite number otherwise.

When q is rational, $q = \dfrac{n}{m}$, the curve is algebraic and rational (take $u = \tan\left(\dfrac{t}{2m}\right)$ as a parameter).

It has the same structure as a regular polygon, crossed if $m \geq 2$, with n vertices linked from m to m by curves located inside the circle (C_0).

The notation of simple hypocycloid with n cusps (E_n) refers to the case $q = n$, i.e. when there are no crossings.

Special cases are the point $(q = 1)$, the La Hire line $(q = 2)$, the deltoid $(q = 3)$, and the astroid $(q = 4)$.

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04_Hypocycloid.py, and the XML code in the file D04_Hypocycloid.2D.xml.

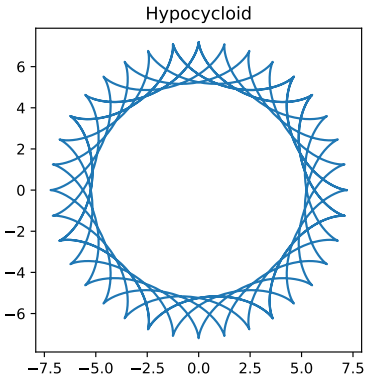

18.5.5 Epitrochoid

The epitrochoids are the curves described by a point linked to a circle (C) rolling without slipping on a base circle (C_0), the open disks with boundaries (C) and (C_0) being disjoint. An epitrochoid has parametric equations

$$qx(t) = a\left((q+1)\cos(t) - k\cos\left((q+1)t\right)\right),$$

$$qy(t) = a\left((q+1)\sin(t) - k\sin\left((q+1)t\right)\right).$$

See also Wikipedia [1366], MathWorld [1039], MathCurve [308].

For $d = a + b$, we get the roses.

For $k < 1$, the curve is also called shortened epicycloid.

For $k > 1$, the curve is also called elongated epicycloid.

The limit case is $k = \dfrac{1}{q+1}$; there is then a flat point.

For $\dfrac{1}{q+1} < k < 1$, the curve undulates, with points of inflection.

For $k = 1$, we obtain the epicycloid, with cusps.

For $1 < k < q + 1$, the curve makes loops, with concave and convex portions, (positive angular speed, then negative alternately).

For $k = q + 1$, we get a rose with index $n < 1$, of polar equation $\rho = 2d\cos\dfrac{q}{q+2}\theta$.

The case $k > q - 1$ leads to a more complicated pattern.

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05_Epitrochoids.py, and the XML code in the file D05_Epitrochoids.2D.xml.

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05_EpitrochoidCS.py, and the XML code in the file D05_EpitrochoidCS.2D.xml.

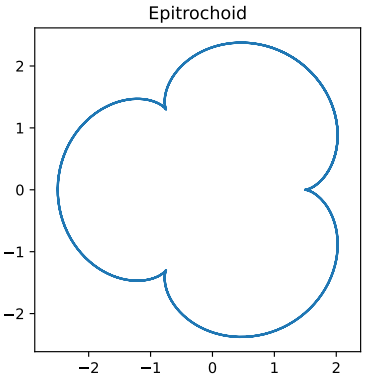

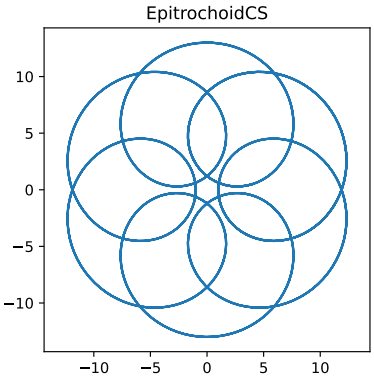

18.5.6 Hypotrochoid

The hypotrochoids are the curves described by a point linked to a circle (C) rolling without slipping internally on a base circle $(C0)$. A hypocycloid has parametric equations

$$qx(t) = a\left((q-1)\cos(t) - k\cos\left((q-1)t\right)\right),$$

$$qy(t) = a\left((q-1)\sin(t) - k\sin\left((q-1)t\right)\right).$$

See also Wikipedia [1372], MathWorld [1043], MathCurve [313].

For $k = 1$, we get the hypocycloids.

If a is fixed but q is changed into $\dfrac{q}{q-1}$ and k into $\dfrac{1}{k}$, then the hypotrochoid obtained is the homothetic image of the initial one with ratio k. Therefore, we get all the hypotrochoids by considering only the case $q \geq 2$.

For $q = 2$, we get the ellipses.

For $q > 2$, the curve is also called curtate hypocycloid if $k < 1$, and prolate hypocycloid if $k > 1$.

However, according to the preceding paragraph, in the case $1 < q < 2$, the curtate hypocycloids are paradoxically obtained for $k > 1$ and the prolate ones for $k < 1$.

For $k = q - 1$, we get a rose of index $n > 1$.

The hypocycloid with parameter $q = n/m$ constitutes a "rounded" approximation of the regular polygon of type (n, m); for the portions between two vertices to be as linear as possible, we can consider the limit case where this portion does not have an inflexion point, which corresponds to the case $k = 1/(q-1)$.

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06_Hypotrochoid.py, and the XML code in the file D06_Hypotrochoid.2D.xml.

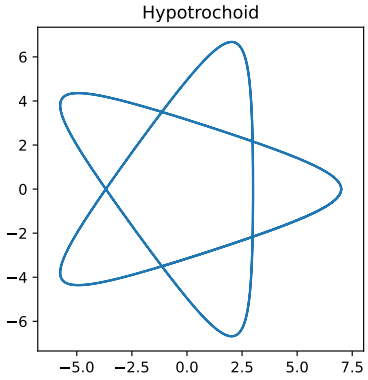

18.5.7 Rose curve

A rose curve, also called Grandi's rose or the multifolium, is a curve which has the shape of a petalled flower. The polar equation of the rose is generally given as $r = a\cos(nt)$ or by the version rotated by 90 degrees, $r = a\sin(nt)$. The sine version has the advantage that roses with odd n have a petal oriented vertically (up or down depending on n), whereas the cosine orientation gives a petal oriented to the right.

See also Wikipedia [1410], MathWorld [1061], MathCurve [321].

If n is odd, the rose is n-petalled. If n is even, the rose is $2n$-petalled.

The curve is algrebraic iff $n = p/q$ is rational, with degree $p + q$ when pq is odd and $2(p + q)$ when pq is even.

If $n = p/q$ is a rational number, then the curve closes at a polar angle of $\theta = \pi qm$, where $m = 1$ if pq is odd and $m = 2$ if pq is even. If n is irrational, then there are an infinite number of petals. For $n > 1$ the curve is a hypotrochoid, and for $0 < n < 1$ it is an epitrochoid. The roses are views from above of the clelias.

Special cases are the limaçon trisectrix ($n = 1/3$), the Dürer folium ($n = 1/2$), the circle ($n = 1$), the quadrifolium ($n = 2$) and the trifolium ($n = 3$).

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07_RoseCurve.py, and the XML code in the file D07_RoseCurve.2D.xml.

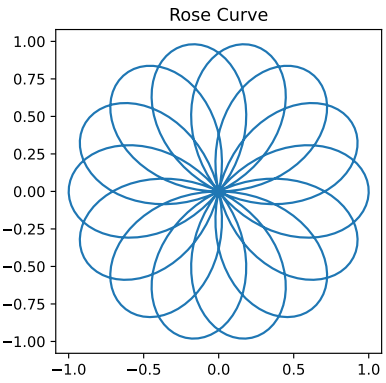

18.5.8 Lissajous curves

Lissajous curves are the family of curves described by the parametric equations

$$x(t) = a\sin(\omega t + \delta),$$

$$y(t) = b\sin(t).$$

See also Wikipedia [1379], MathWorld [1046], MathCurve [318].

Special cases are the line ($\omega = 1, \delta = 0$), the circle ($a = b, \omega = 1, \delta = \pi/2$), the ellipse ($a = b, \omega = 1, \delta = \pi/2$), the section of a parabola ($\omega = 2, \delta = \pi/2$).

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D08_LissajousCurve.py, and the XML code in the file D08_LissajousCurve.2D.xml.

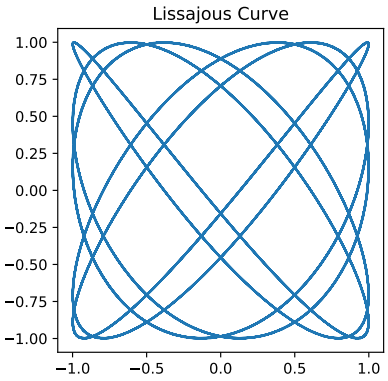

18.5.9 Superellipses (Lamé curves)

Superellipses are the family of curves described by the parametric equations

$$x(t) = |\cos(t)|^{2/r} \cdot a \cdot \mathrm{sgn}(\cos(t)),$$

$$y(t) = |\sin(t)|^{2/r} \cdot b \cdot \mathrm{sgn}(\sin(t)),$$

with $0 \leq t \leq \pi/2$.

See also Wikipedia [1385], MathWorld [1047], MathCurve [314].

> The restriction to r>2 is sometimes made.

The generalization to a three-dimensional surface is known as a superellipsoid.

Superellipses with a=b are also known as Lamé curves or Lamé ovals, and the case $a = b$ with $r = 4$ is sometimes known as the squircle.

Special cases are the astroid ($r = 2/3$), the diamond ($r = 1$), the ellipse ($r = 2$).

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D09_Superellipses.py, and the XML code in the file D09_Superellipses.2D.xml.

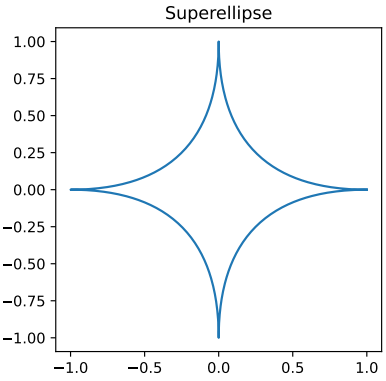

18.5.10 Epispirals

The epispirals are solutions of the problem that consists in determining the trajectories in space of a massive point subject to a force centred on O proportional to $\frac{1}{\rho^3}$ (this force is, thanks to the Binet formula, proportional to $u^2(u+u'')$ which is here $(1+n^2)u^2$, with $u=\frac{1}{\rho}$); the other solutions are the Poinsot spirals, with intermediary case the hyperbolic spiral.

The curve is composed of an infinite branch obtained for $-\frac{\pi}{2n} < 0 < \frac{\pi}{2n}$, and of all its images by rotations by angle $k\left(\pi+\frac{\pi}{n}\right)$ for integer values of k. When n is a rational number with numerator p, and denominator q, the curve is symmetrical about O iff p or q is even.

In this case, the curve is composed of $2p$ branches derived from the initial branch by rotations by angles $\frac{2k\pi}{n}$ and $\frac{2k\pi}{n}+\pi$.

Special cases are the line ($n=1$), the crosscurve ($n=2$), the rectangukar trefoil ($n=3$), the Delanges trisectrix ($n=1/2$), the MacLaurin trisectrix ($n=1/3$).

See also Wikipedia [1399], MathWorld [1054], MathCurve [307].

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D10_Epispirals.py, and the XML code in the file D10_Epispirals.2D.xml.

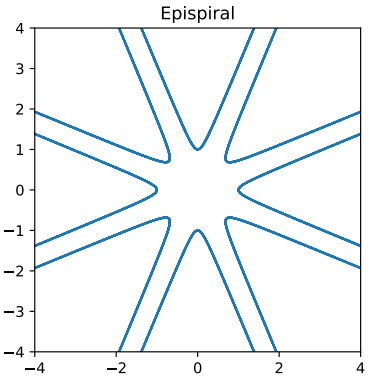

18.5.11 Nodal curves (stereographic projections of the clelia)

Polar equation: $\rho = a\tan(n\theta)$.

The nodal curves are the Brocard transforms of the Kappa, when the pole is at the centre of the Kappa. Each curve is composed of an infinite branch, the base, obtained for $-\frac{\pi}{2n} < 0 < \frac{\pi}{2n}$, and all its images by the rotations of angle $k\frac{\pi}{n}$ when k is an integer.

If n is rational and its numerator is p and its denominator q, then the curve is composed of 2p branches, images of the base branch by rotation when q is odd, and p branches when it is even.

Special cases are the Kappa ($n = 1$), the windmill ($n = 2$),the right strophoid ($n = 1/2$).

All nodal curves are stereographic projections of the clelia. The inverse (with centre O and radius a^2) of a nodal curve is the same curve turned by $\frac{\pi}{2n}$.

See also: MathCurve [329].

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D11_NodalCurves.py, and the XML code in the file D11_NodalCurves.2D.xml.

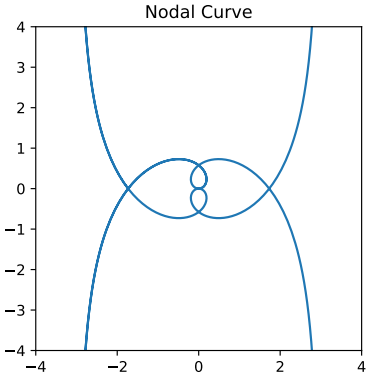

18.5.12 Cyclic-harmonic curves

Polar equation: $\rho = a(1 + e\cos(n\theta))$.

The cyclic-harmonic curves are the conchoids of roses with respect to their centre. The curve is composed of a base pattern, symmetrical about Ox, obtained for $-\frac{\pi}{n} \leq 0 \leq \frac{\pi}{n}$, transformed by all the rotations of $2k\frac{\pi}{n}$ for integer values of k. When n is a rational number and p is its numerator, p rotations give the whole curve.

Case $e < 1$: For $n = p/q$, the cyclic-harmonic curve of parameter n is one of the possible projections of the Turk's head knot of type (p, q); its p external summits and its p internal vertices form a regular polygon, and it has $p(q - 1)$ double points.

Special cases are the trefoil knot ($n = 3/2$), the projection of the 5.1 knot ($n = 5/2$) the projection of the figure-eight knot ($n = 2/3$).

Case $e = 1$:

Special cases are the cardioid for $n = 1$ (see also Wikipedia [1392], MathWorld [1051], MathCurve [301]), the double egg ($n = 2$)

Case $e > 1$:

Special cases are the limaçon of Pascal for $n = 1$ (see also Wikipedia [1406], MathWorld [1058], MathCurve [317]), the cycloid (or trisectrix) of Ceva for $n = 2$ (see also Wikipedia [1395], MathWorld [1053], MathCurve [302]), and Freeth's nephroid for $n = 1/2$ (see also Wikipedia [1401], MathWorld [1056], MathCurve [310]).

See also: MathCurve [327].

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D12_CyclicHarmonicCurves.py, and the XML code in the file D12_CyclicHarmonicCurves.2D.xml.

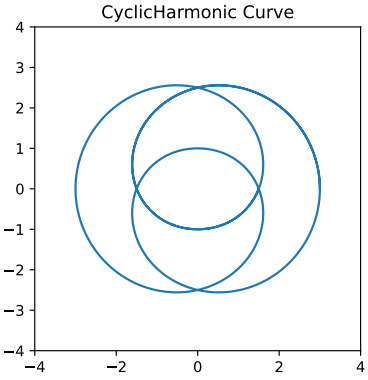

18.5.13 Rational circular cubics

The rational circular cubics have the following parametrization (see MathCurve [331]):

$$x(t) = \frac{dt^2 + 2bt + 2a + d}{1 + t^2}$$

$$y(t) = \frac{dt^3 + 2bt^2 + 2at + dt}{1 + t^2} = tx(t).$$

They have a real singularity (see Wikipedia [1442]), which is necessarily unique.

- For $\sqrt{a^2 + b^2} > |a+d|$, the cubic is called crunodal, i.e. this singularity is a double point with different tangents (see Wikipedia [1437], MathWorld [1068]).
- For $\sqrt{a^2 + b^2} = |a+d|$, the cubic is called cuspidal, i.e. this singularity is a cuspidal point (see Wikipedia [1438], MathWorld [1069]).
- For $\sqrt{a^2 + b^2} < |a+d|$, the cubic is called acnodal, i.e. this singularity is an isolated point (see Wikipedia [1434], MathWorld [1064]).

Many other parametric curves can be obtained as special cases:

- For $b = 0$, we get the right rational circular cubics (see also: MathCurve [332]).
- For $\sqrt{a^2 + b^2} = |a + d|$, we get the cissoids (see Wikipedia [1435], MathWorld [1065], MathCurve [325]).
- For $d = -a$, we get the strophoids (see Wikipedia [1412], MathWorld [1062], MathCurve [323]).
- For $a = -2d, b = 0$, we get the Maclaurin trisectrix (see Wikipedia [1443], MathWorld [1070], MathCurve [328]).
- In the right and acnodal case (i.e. b = 0, d > 0), we get the cubic (or conchoid) of de Sluze (see Wikipedia [1394], MathWorld [1052], MathCurve [322]).

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D13_RationalCircularCubics.py, and the XML code in the file D13_RationalCircularCubics.2D.xml.

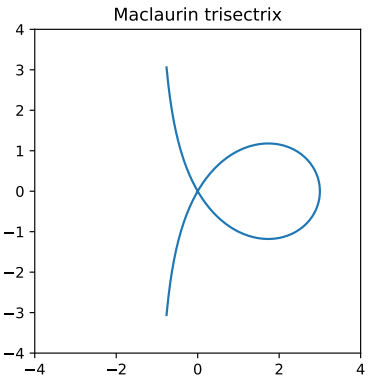

18.6 Field lines

18.6.1 Colored electric field lines: 1 positive vs 1 negative charge

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_4_ColoredFieldLines.py, and the XML code in the file D01_4_ColoredFieldLines.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        UseColors_ = True
        Model_ = 1  # 1, 2, 3, 4
        ColoredFieldLines(UseColors=UseColors_, Model=Model_)
```

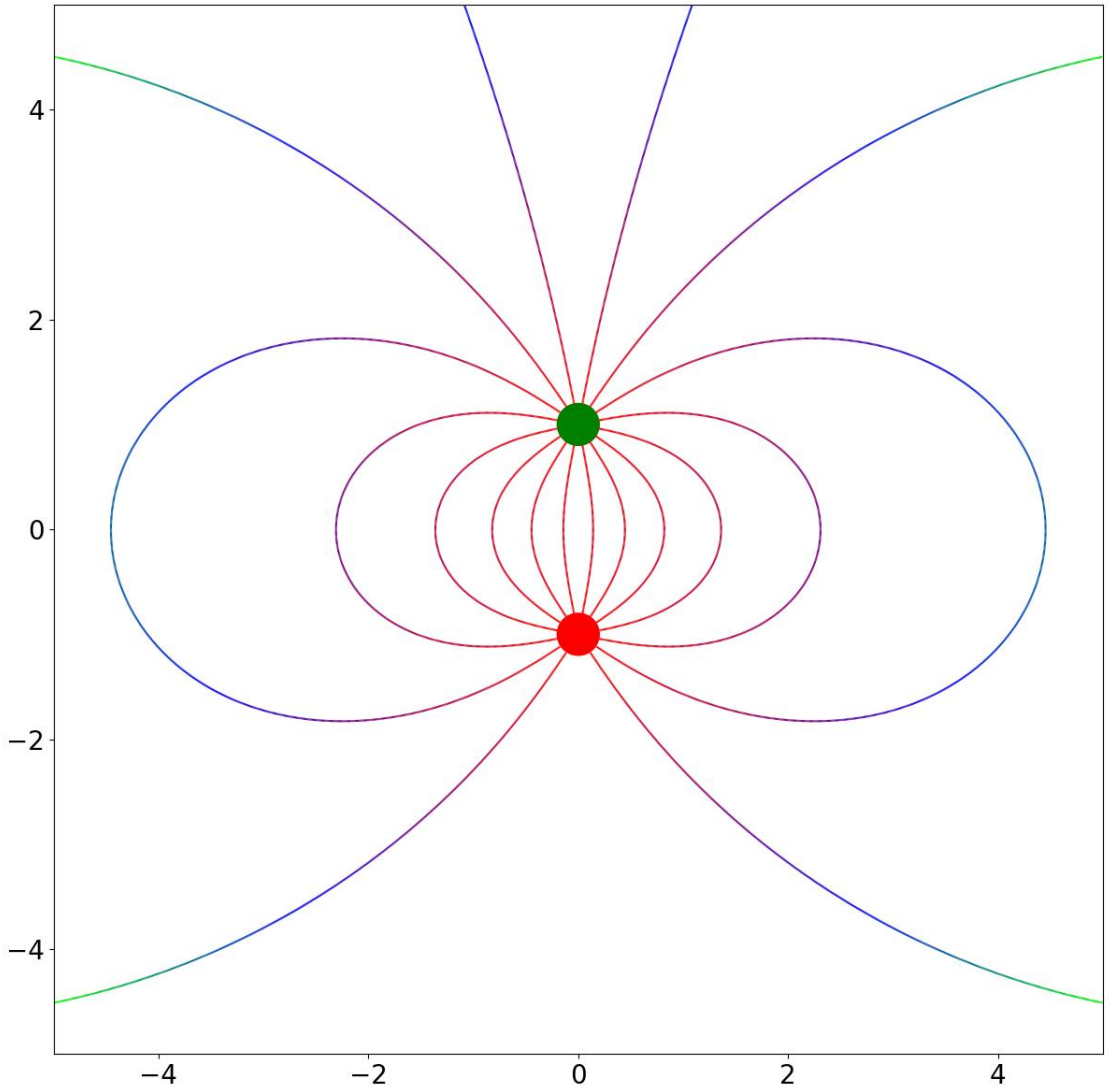

18.6.2 Colored electric field lines: 3 positive vs 1 negative charge(s)

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_4_ColoredFieldLines.py, and the XML code in the file D01_4_ColoredFieldLines.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        UseColors_ = True
        Model_ = 2  # 1, 2, 3, 4
        ColoredFieldLines(UseColors=UseColors_, Model=Model_)
```

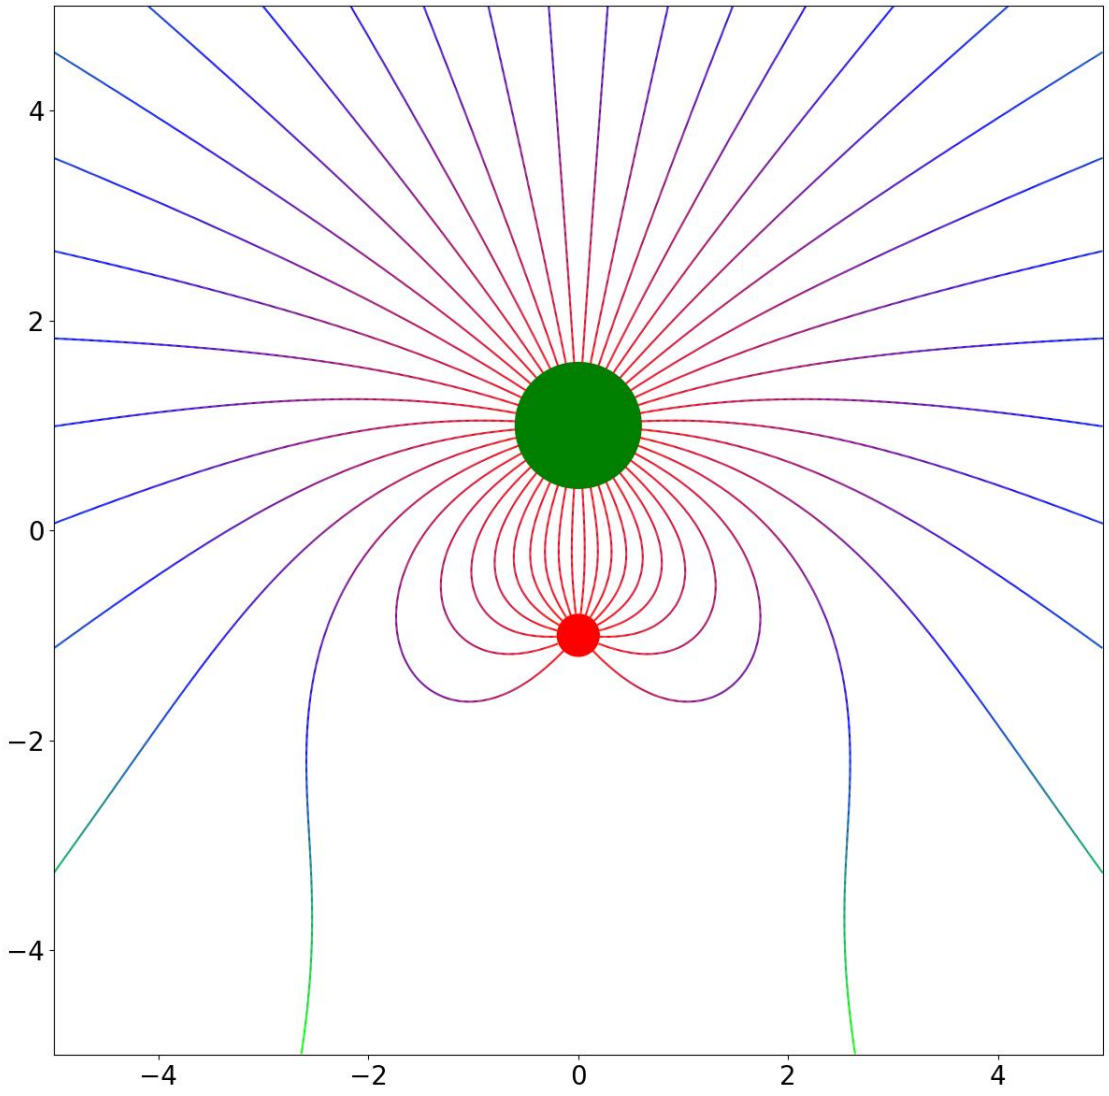

18.6.3 Colored electric field lines: 3 positive vs 1 positive charge(s)

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_4_ColoredFieldLines.py, and the XML code in the file D01_4_ColoredFieldLines.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        UseColors_ = True
        Model_ = 3  # 1, 2, 3, 4
        ColoredFieldLines(UseColors=UseColors_, Model=Model_)
```

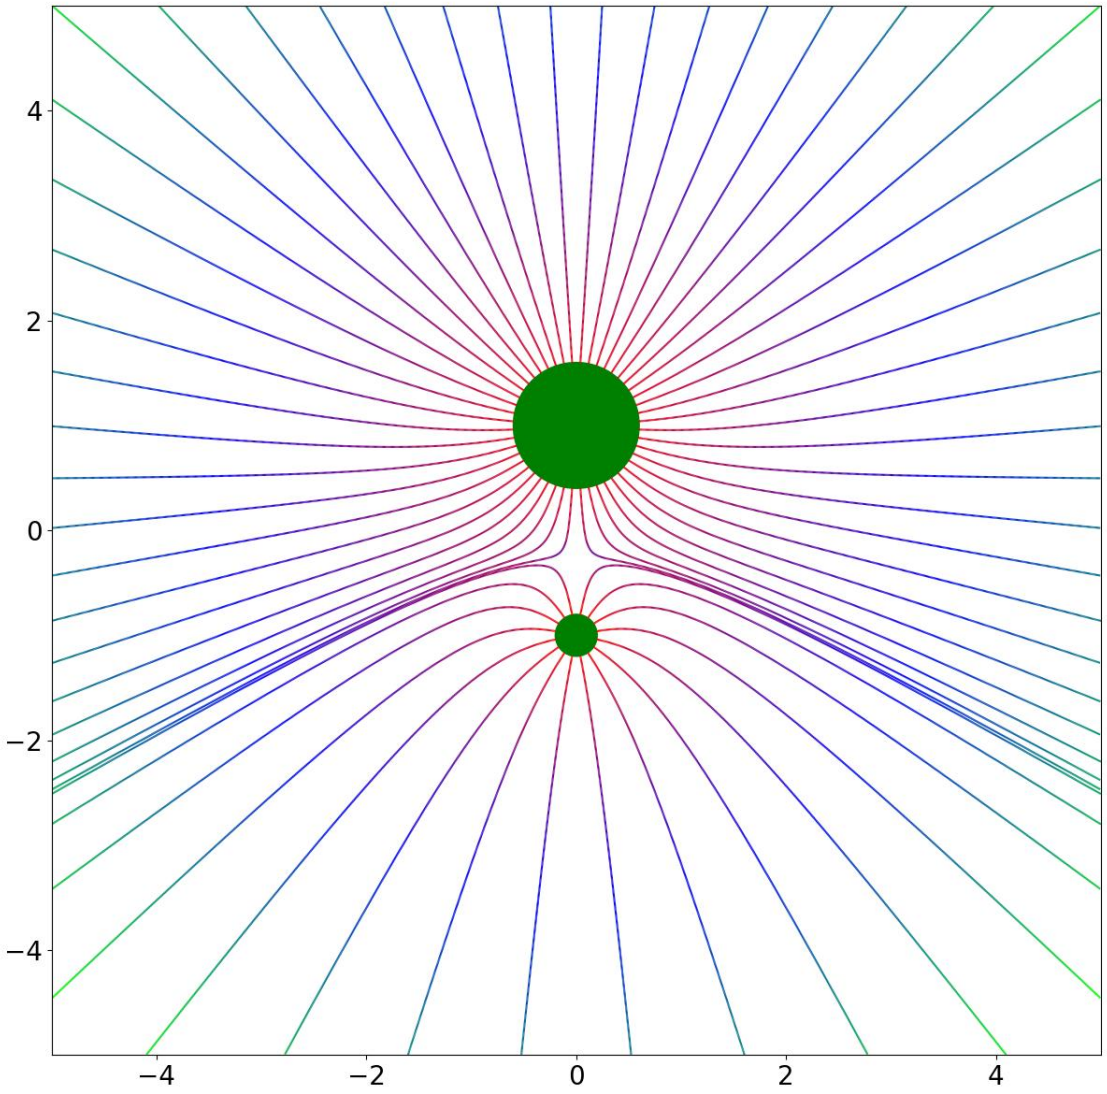

18.6.4 Colored electric field lines: 3 positive and 2 negative vs 1 positive charge(s)

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_4_ColoredFieldLines.py, and the XML code in the file D01_4_ColoredFieldLines.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        UseColors_ = True
        Model_ = 4  # 1, 2, 3, 4
        ColoredFieldLines(UseColors=UseColors_, Model=Model_)
```

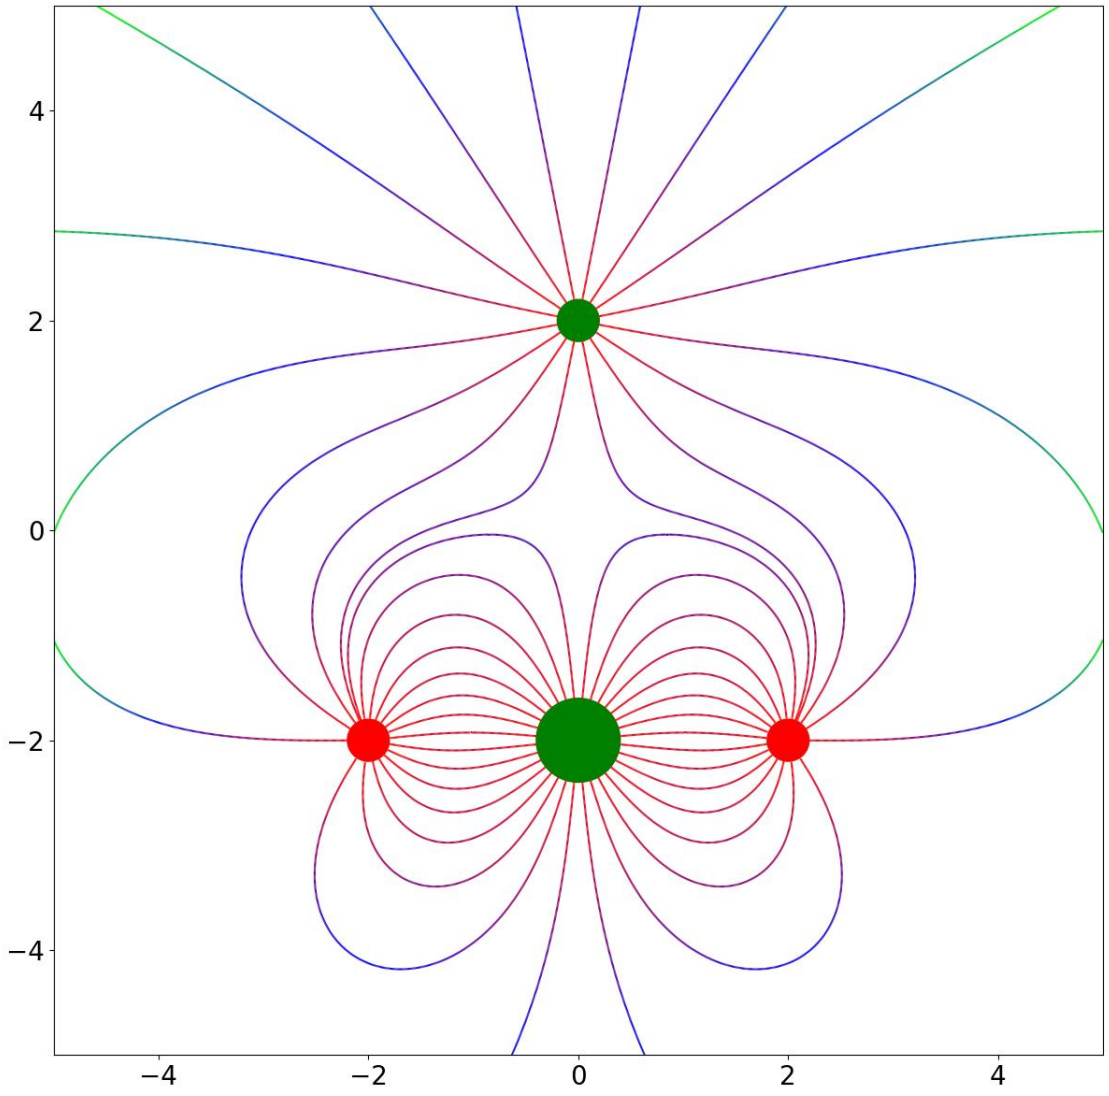

18.7 Contours

18.7.1 Open Contourplot

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_ContourOpen.py, and the XML code in the file D01_ContourOpen.2D.xml.

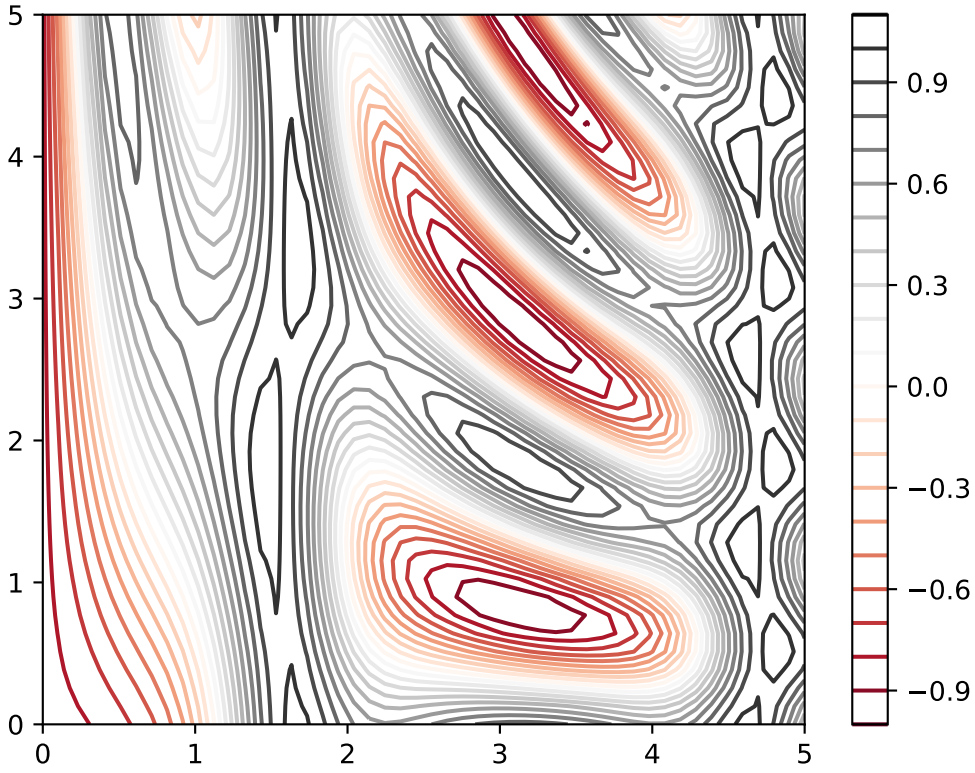

18.7.2 Filled Contourplot

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02_ContourFilled.py, and the XML code in the file D02_ContourFilled.2D.xml.

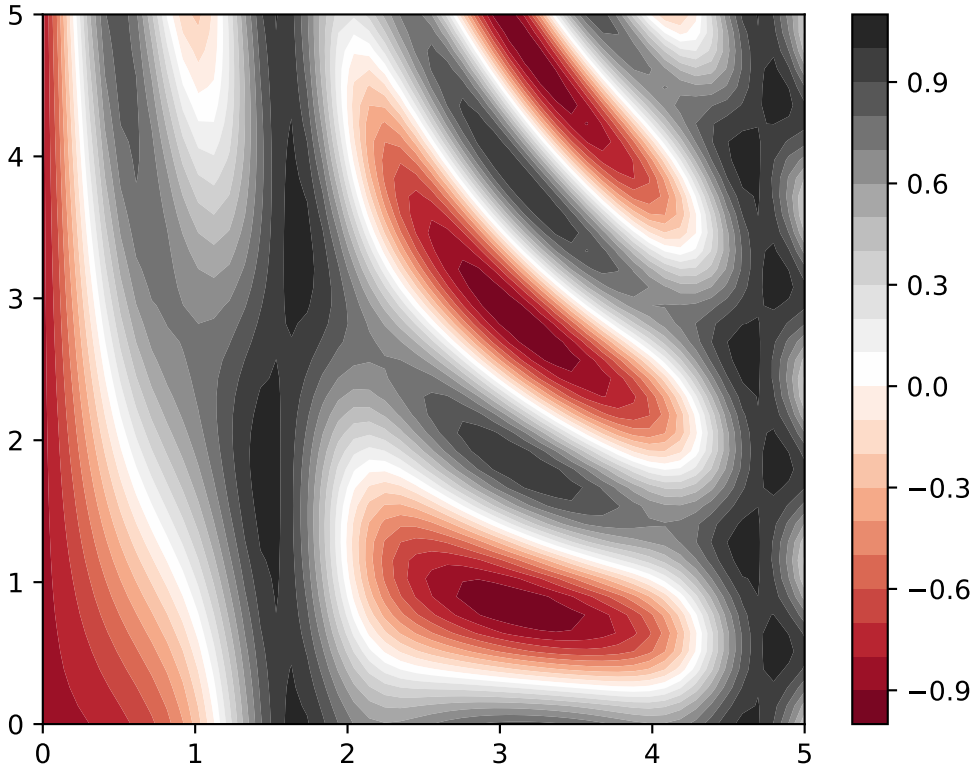

18.7.3 Electric dipole: field lines and open contours

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03_08_FieldLinesContours.py, and the XML code in the file D03_08_FieldLinesContours.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        ContourFilled_ = False
        Model_ = 1  # 1, 2, 3, 4
        FieldLinesContours(ContourFilled=ContourFilled_, Model=Model_)
```

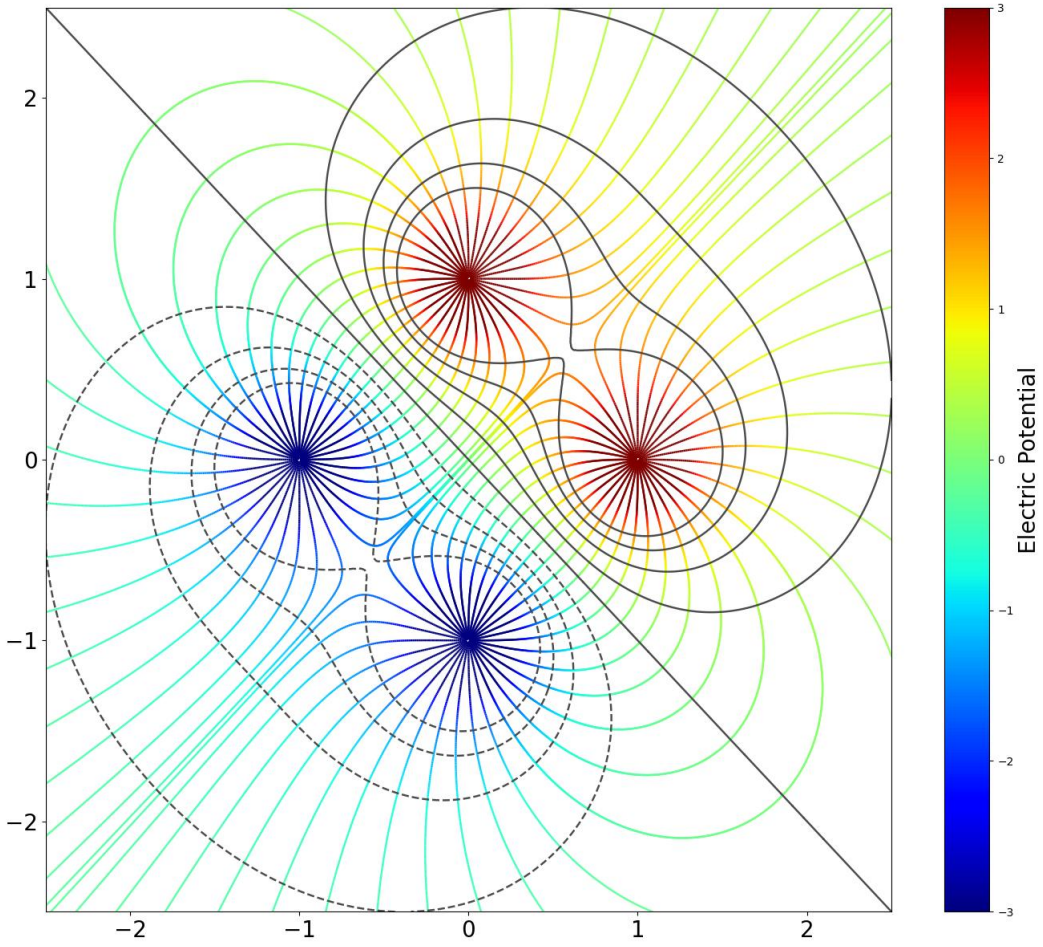

18.7.4 Electric quadrupole: field lines and open contours

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03_08_FieldLinesContours.py, and the XML code in the file D03_08_FieldLinesContours.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        ContourFilled_ = False
        Model_ = 2  # 1, 2, 3, 4
        FieldLinesContours(ContourFilled=ContourFilled_, Model=Model_)
```

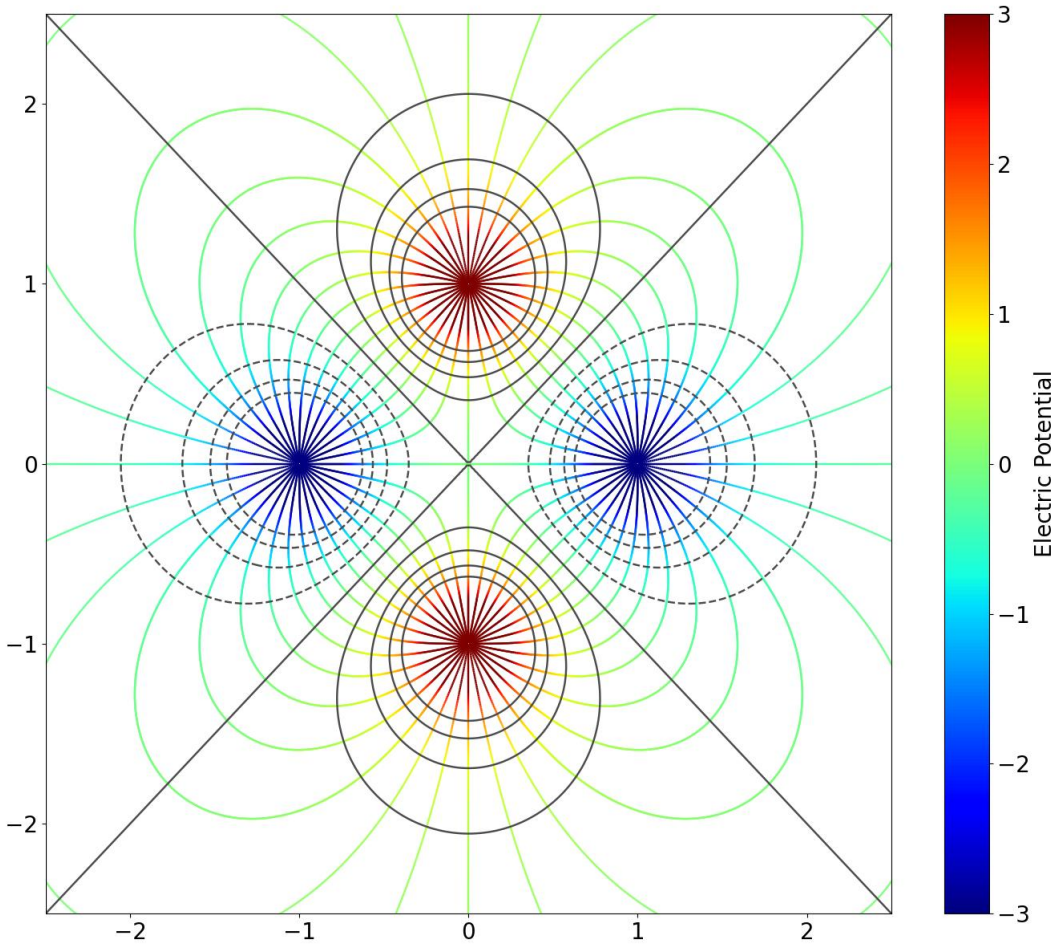

18.7.5 Electric dipoles: field lines and filled contours

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03_08_FieldLinesContours.py, and the XML code in the file D03_08_FieldLinesContours.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        ContourFilled_ = True
        Model_ = 1  # 1, 2, 3, 4
        FieldLinesContours(ContourFilled=ContourFilled_, Model=Model_)
```

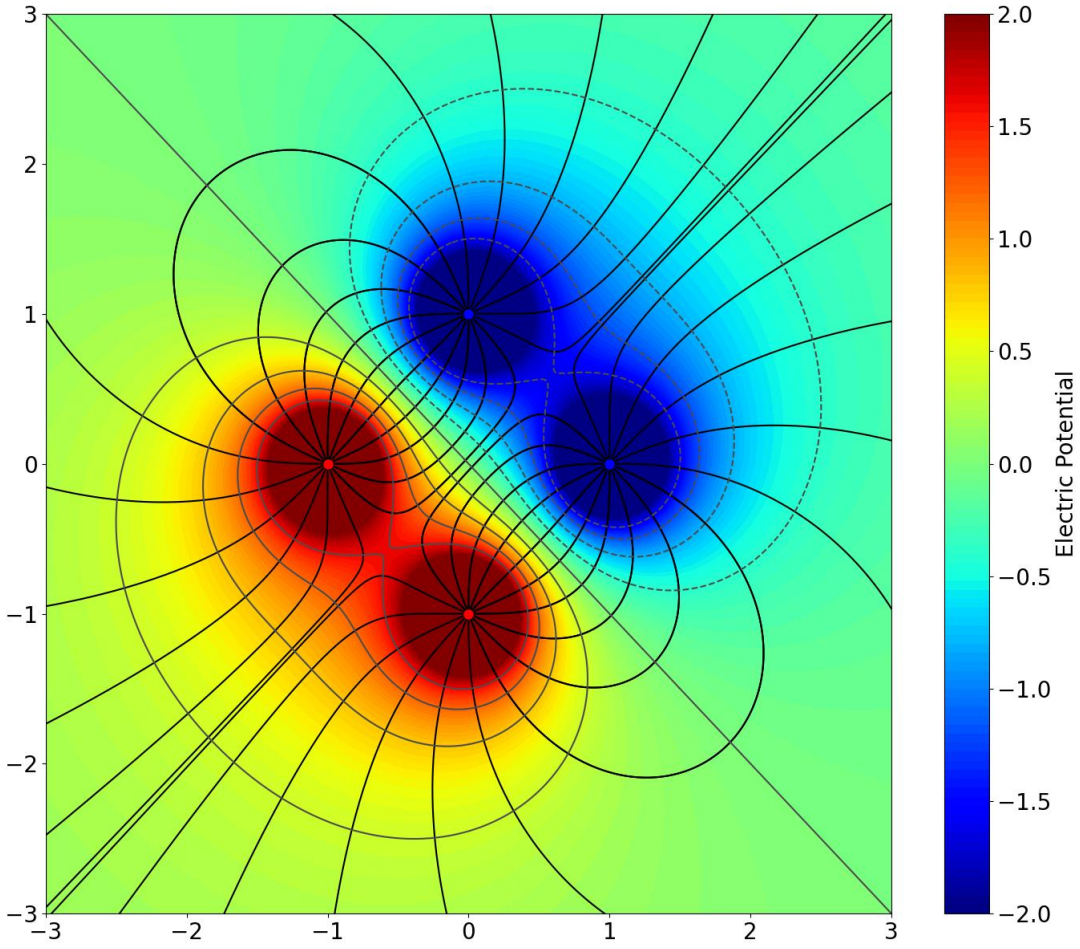

18.7.6 Electric quadrupole: field lines and filled contours

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03_08_FieldLinesContours.py, and the XML code in the file D03_08_FieldLinesContours.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        ContourFilled_ = True
        Model_ = 2  # 1, 2, 3, 4
        FieldLinesContours(ContourFilled=ContourFilled_, Model=Model_)
```

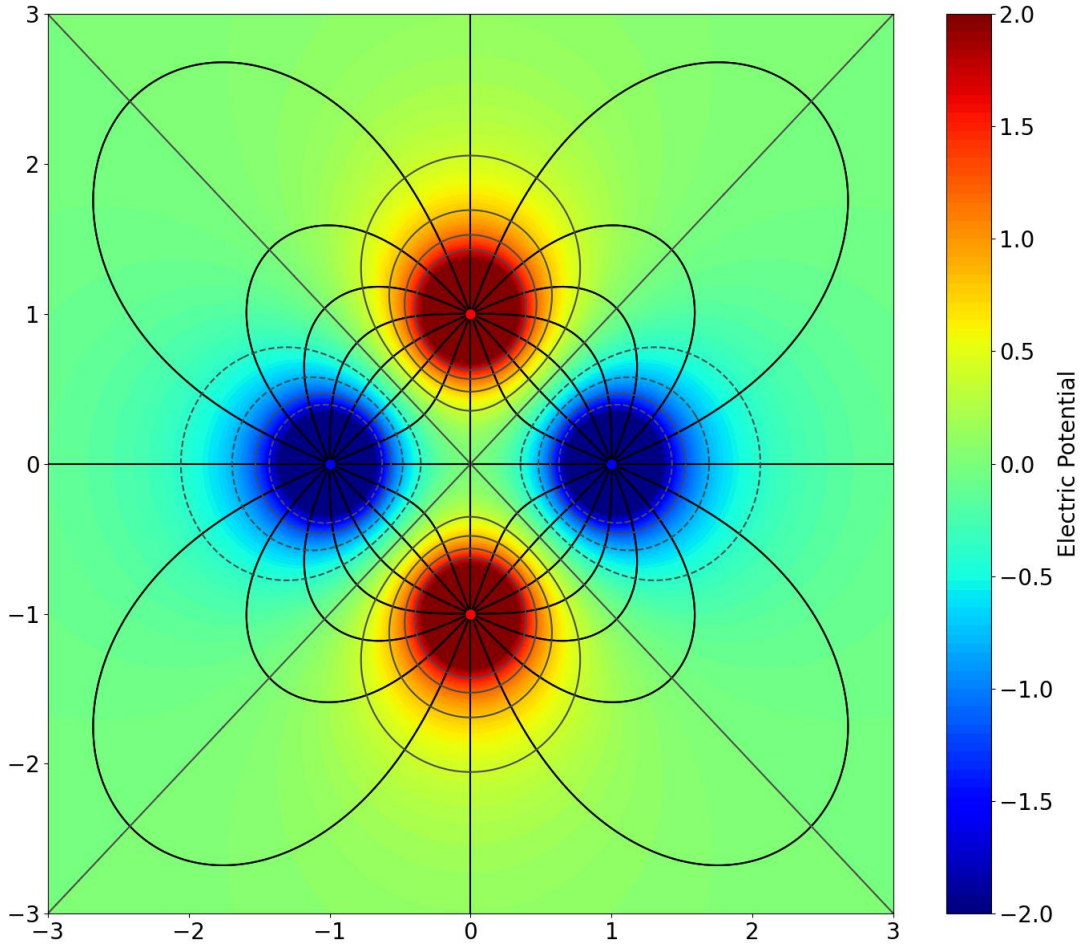

18.7.7 Orthogonal electric dipoles: field lines and filled contours

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03_08_FieldLinesContours.py, and the XML code in the file D03_08_FieldLinesContours.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        ContourFilled_ = True
        Model_ = 3  # 1, 2, 3, 4
        FieldLinesContours(ContourFilled=ContourFilled_, Model=Model_)
```

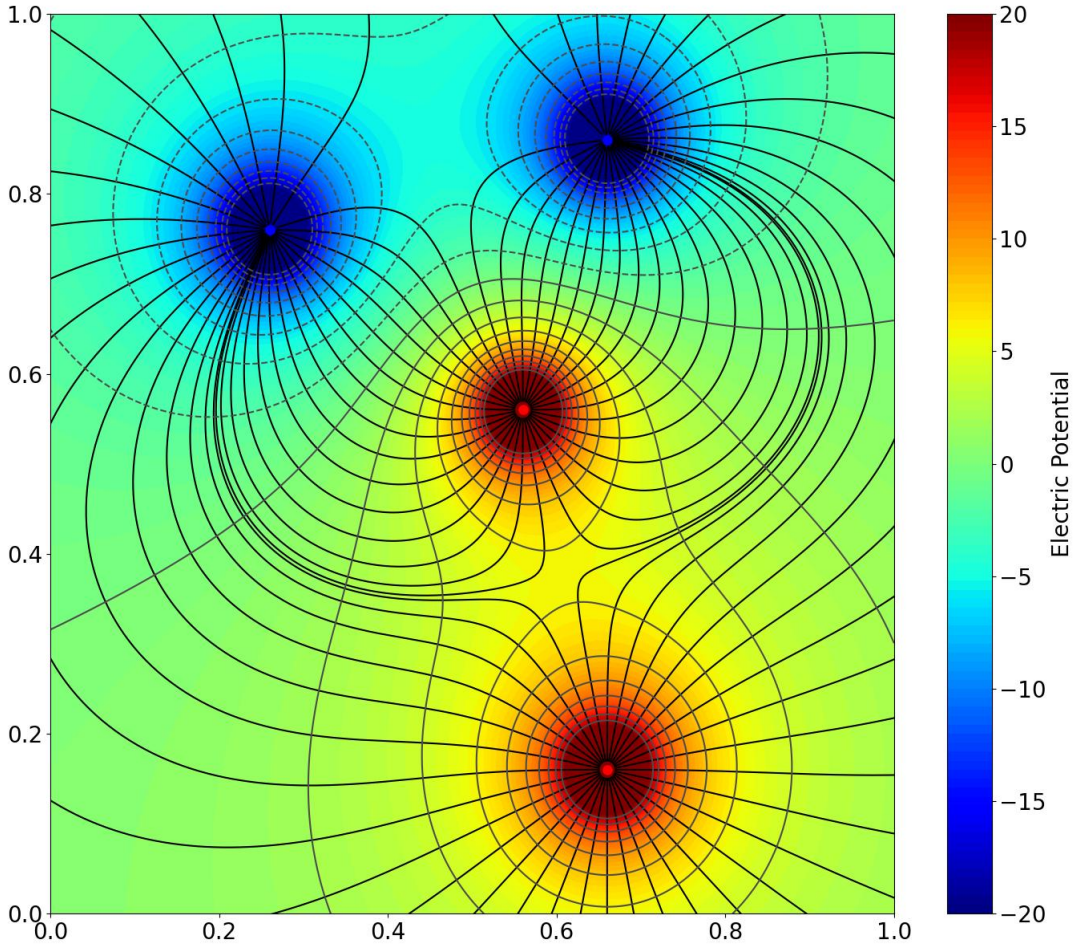

18.7.8 Electric field lines around a point charge with grounded sphere

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03_08_FieldLinesContours.py, and the XML code in the file D03_08_FieldLinesContours.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        ContourFilled_ = True
        Model_ = 4  # 1, 2, 3, 4
        FieldLinesContours(ContourFilled=ContourFilled_, Model=Model_)
```

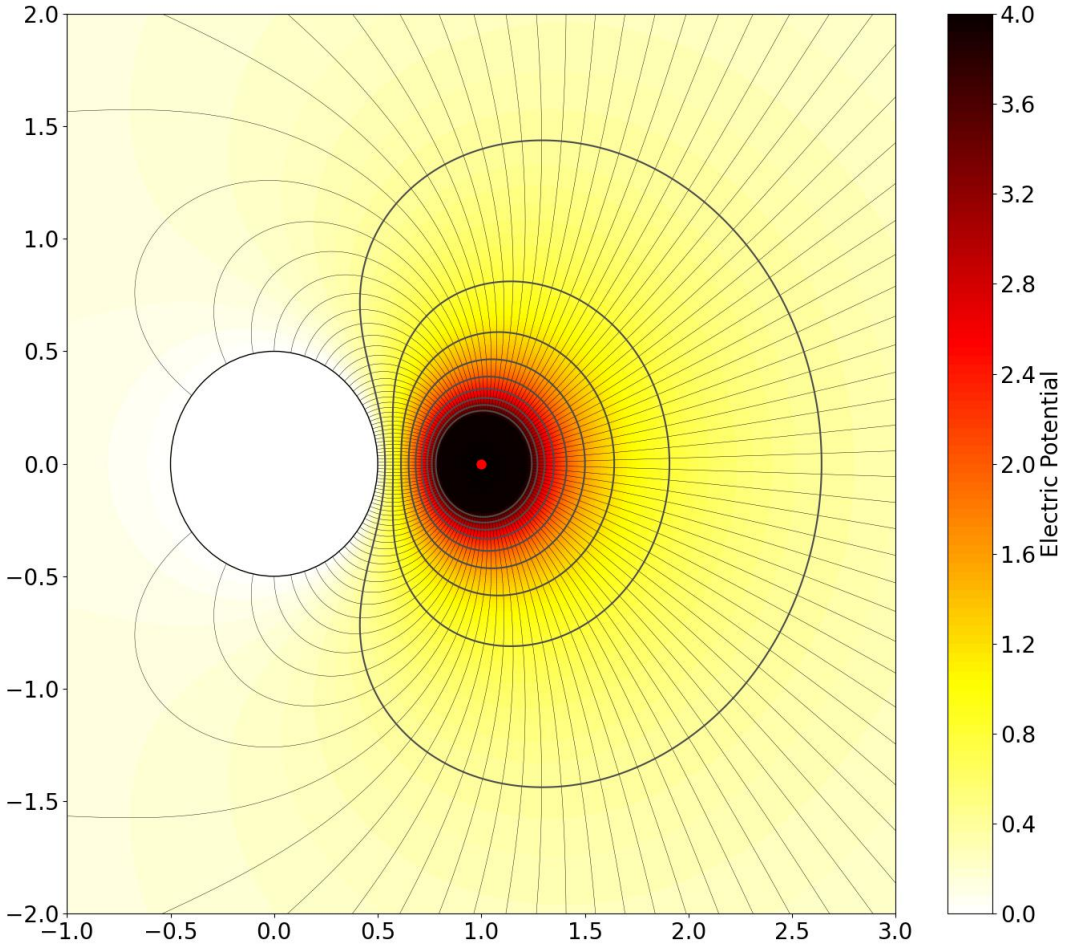

18.8 Complex functions rendered as contours

18.8.1 Complex square function

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_8_ContourComplex.py, and the XML code in the file D01_8_ContourComplex.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        Contour2dComplex(func=lambda z:z*z, wclip=20.0,
            showlevels=True, Title=r'$f(z)=z^2$')
```

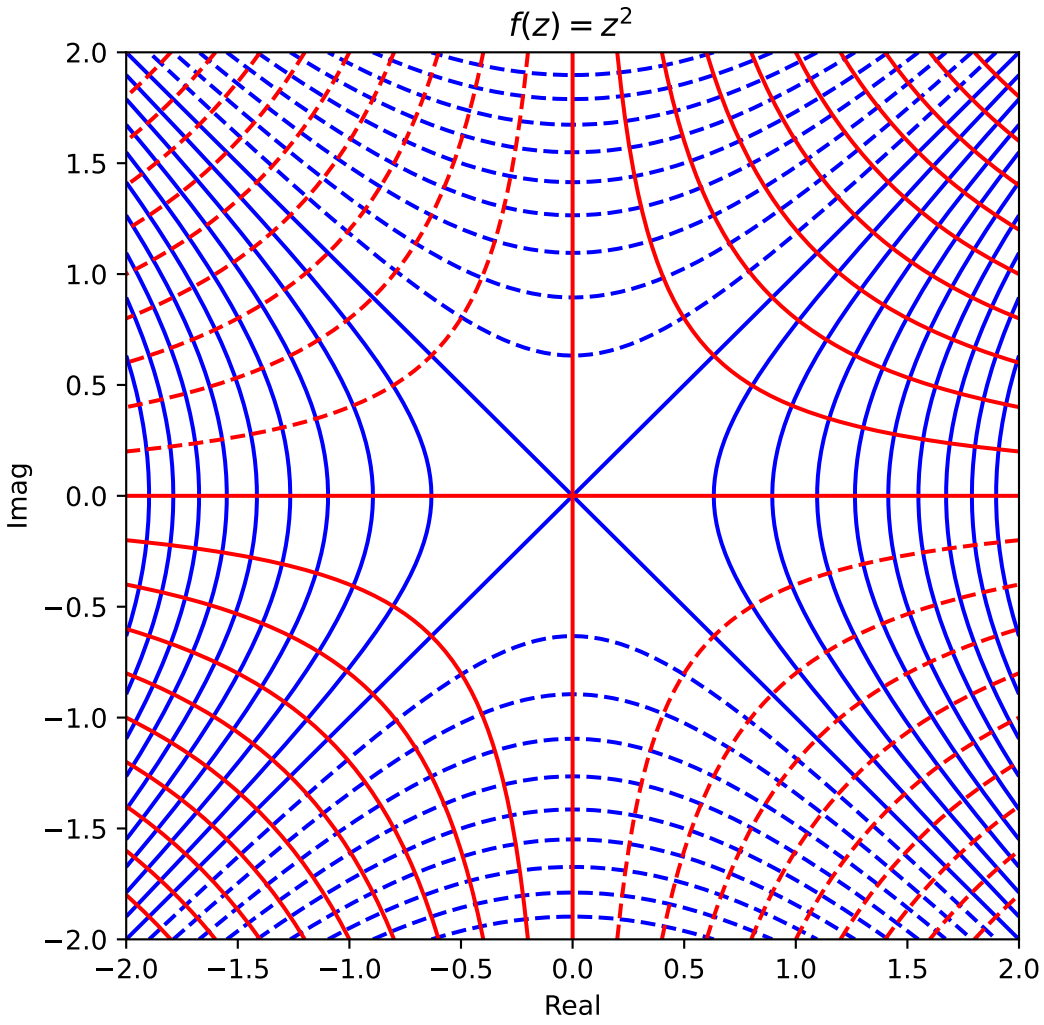

18.8.2 Complex sqrt function

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_8_ContourComplex.py, and the XML code in the file D01_8_ContourComplex.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        Contour2dComplex(func=np.sqrt, wclip=20.0, Title='f(z)=sqrt(z)')
```

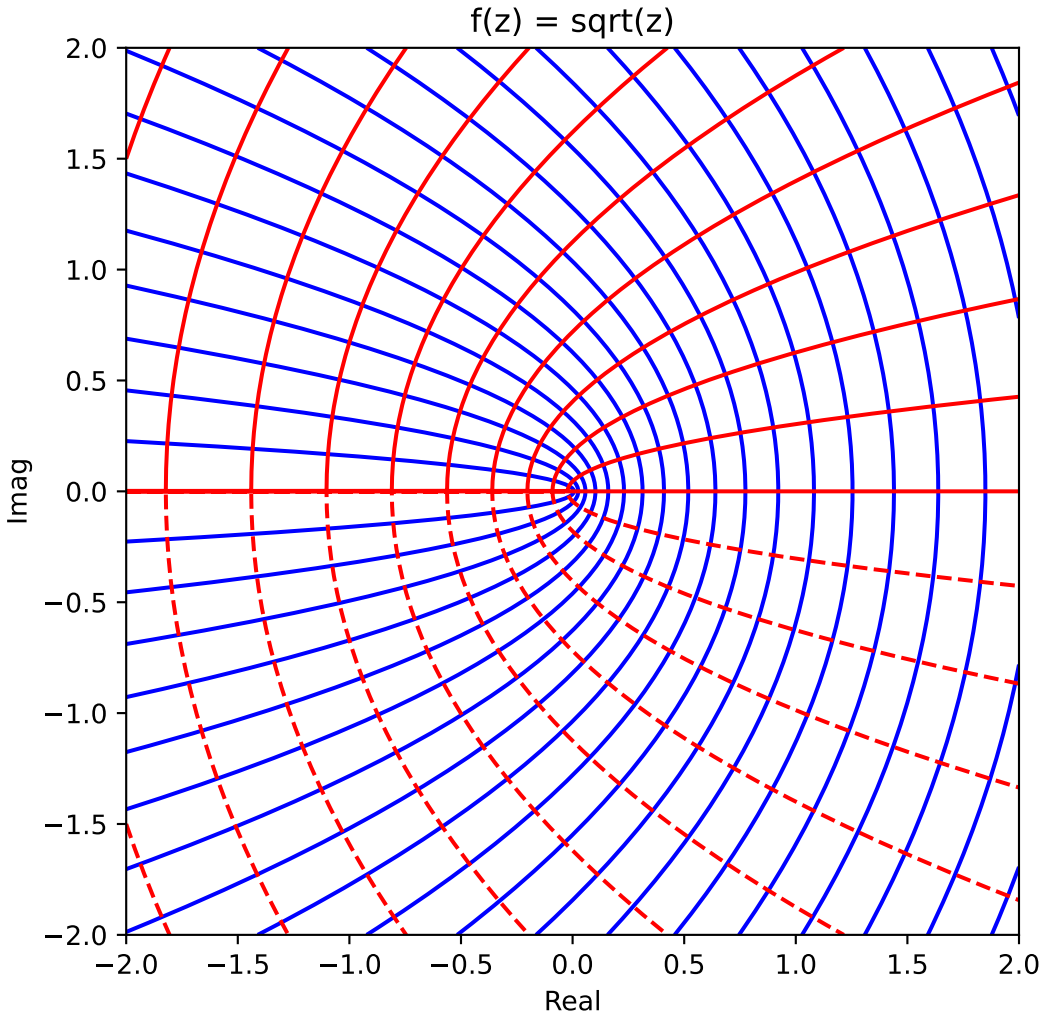

18.8.3 Complex exp function

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_8_ContourComplex.py, and the XML code in the file D01_8_ContourComplex.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        Contour2dComplex(func=np.exp, wclip=20.0, Title='f(z)=exp(z)')
```

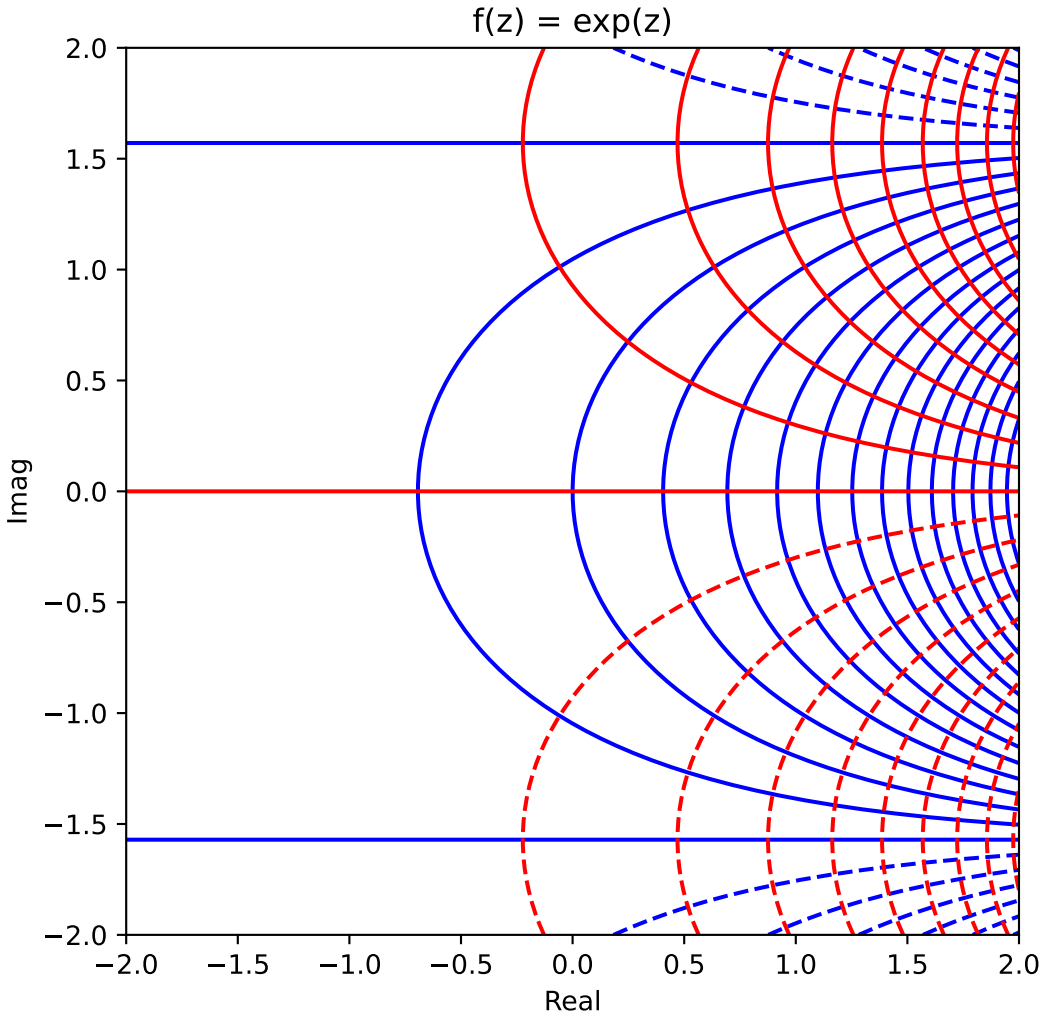

18.8.4 Complex log function

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_8_ContourComplex.py, and the XML code in the file D01_8_ContourComplex.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        Contour2dComplex(func=np.log, wclip=2.5, Title='f(z)=log(z)')
```

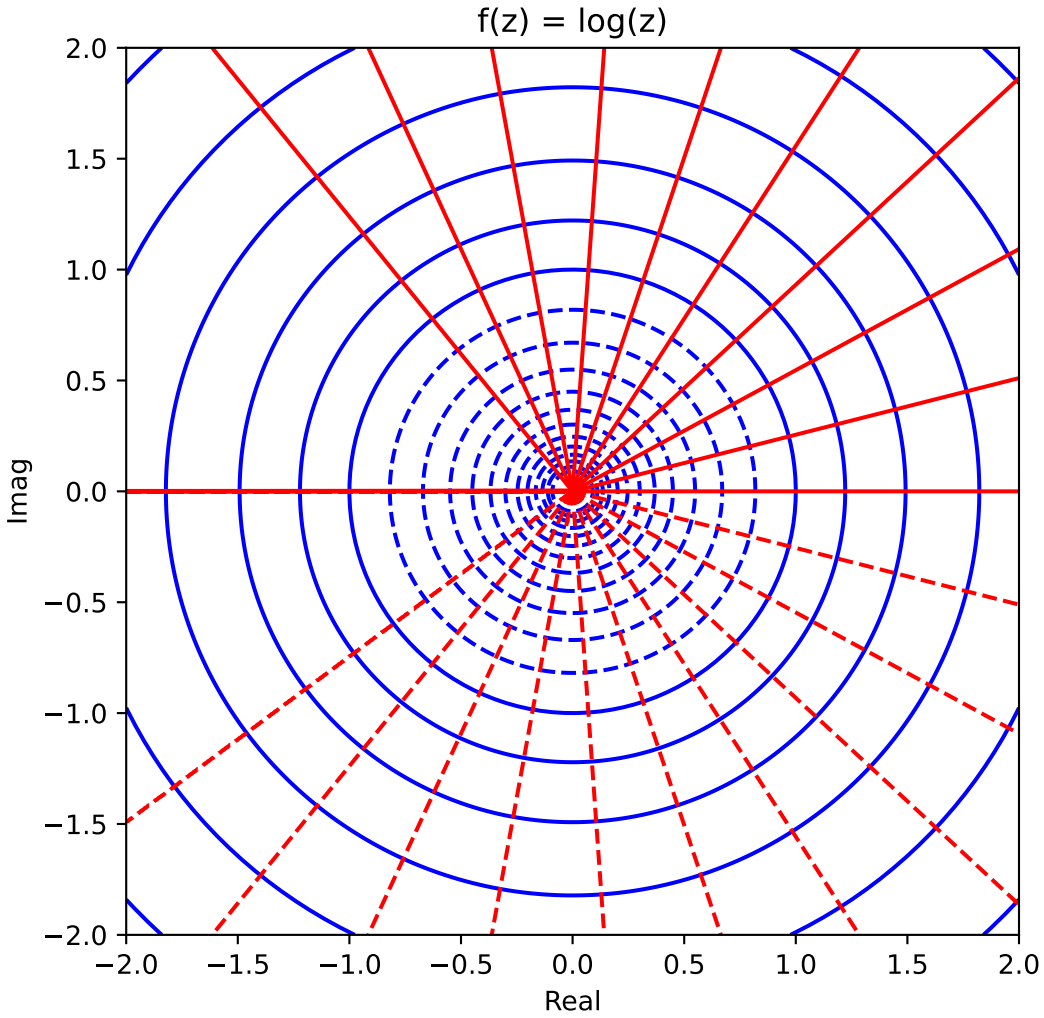

18.8.5 Complex sine function

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_8_ContourComplex.py, and the XML code in the file D01_8_ContourComplex.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        Contour2dComplex(func=np.sin, wclip=20.0, Title='f(z)=sin(z)')
```

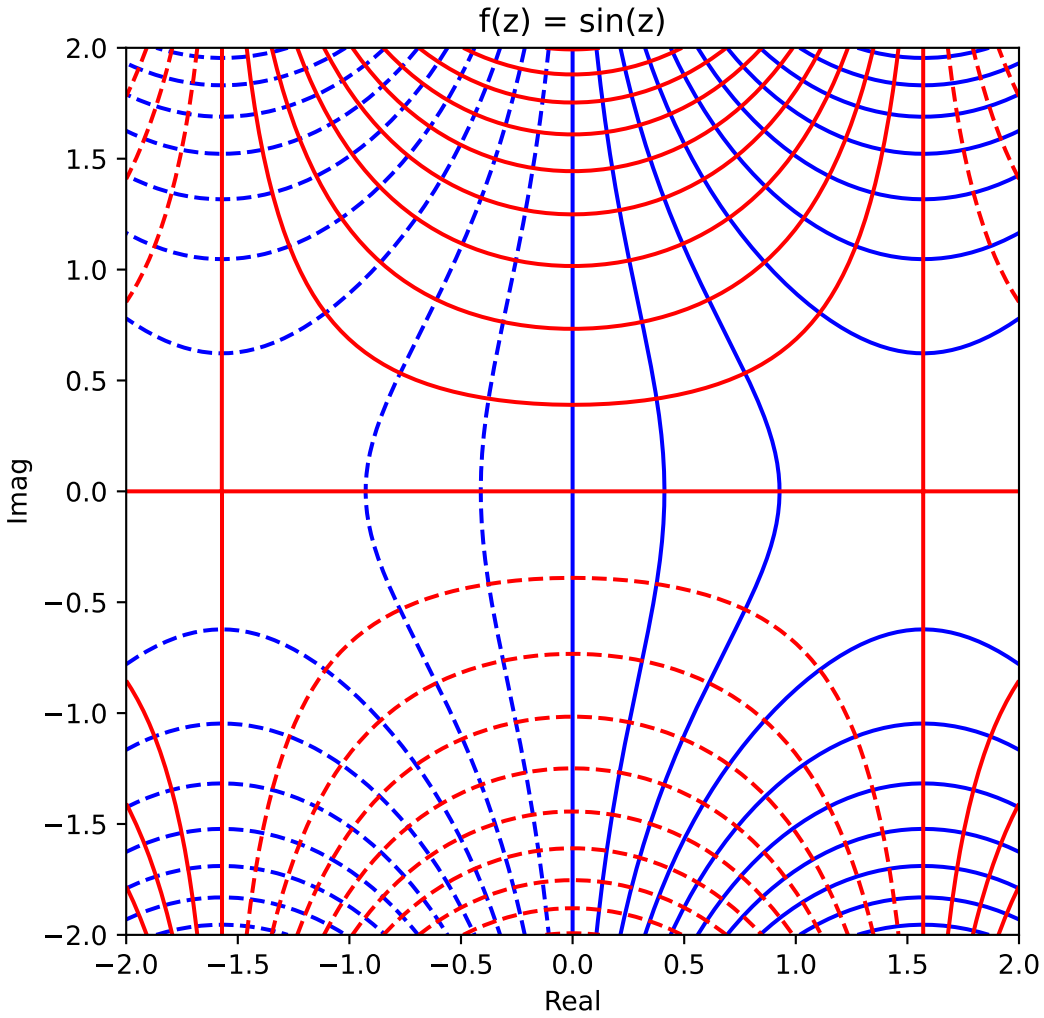

18.8.6 Complex asin function

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_8_ContourComplex.py, and the XML code in the file D01_8_ContourComplex.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        Contour2dComplex(func=np.asin, wclip=20.0, Title='f(z)=asin(z)')
```

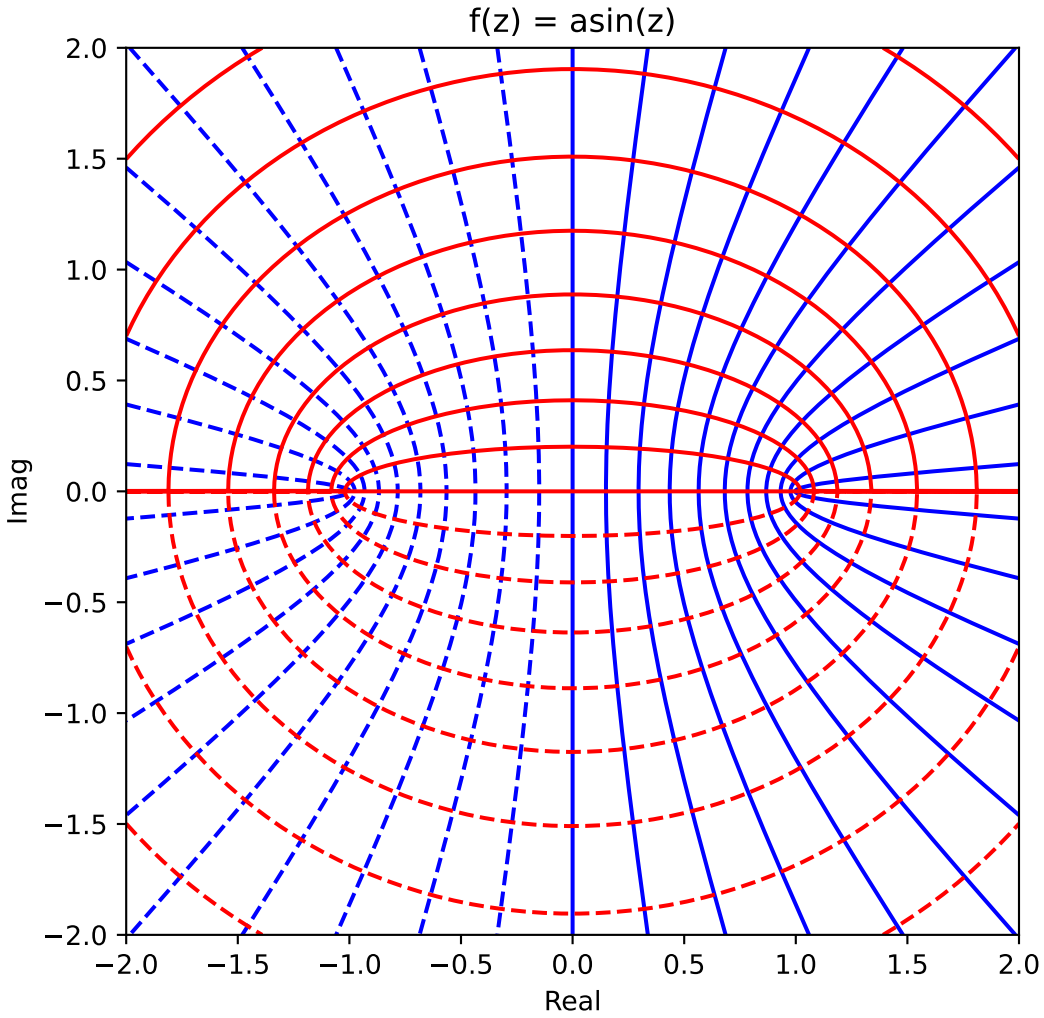

18.8.7 Complex tan function

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_8_ContourComplex.py, and the XML code in the file D01_8_ContourComplex.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        Contour2dComplex(func=np.tan, wclip=2.0, Title='f(z)=tan(z)')
```

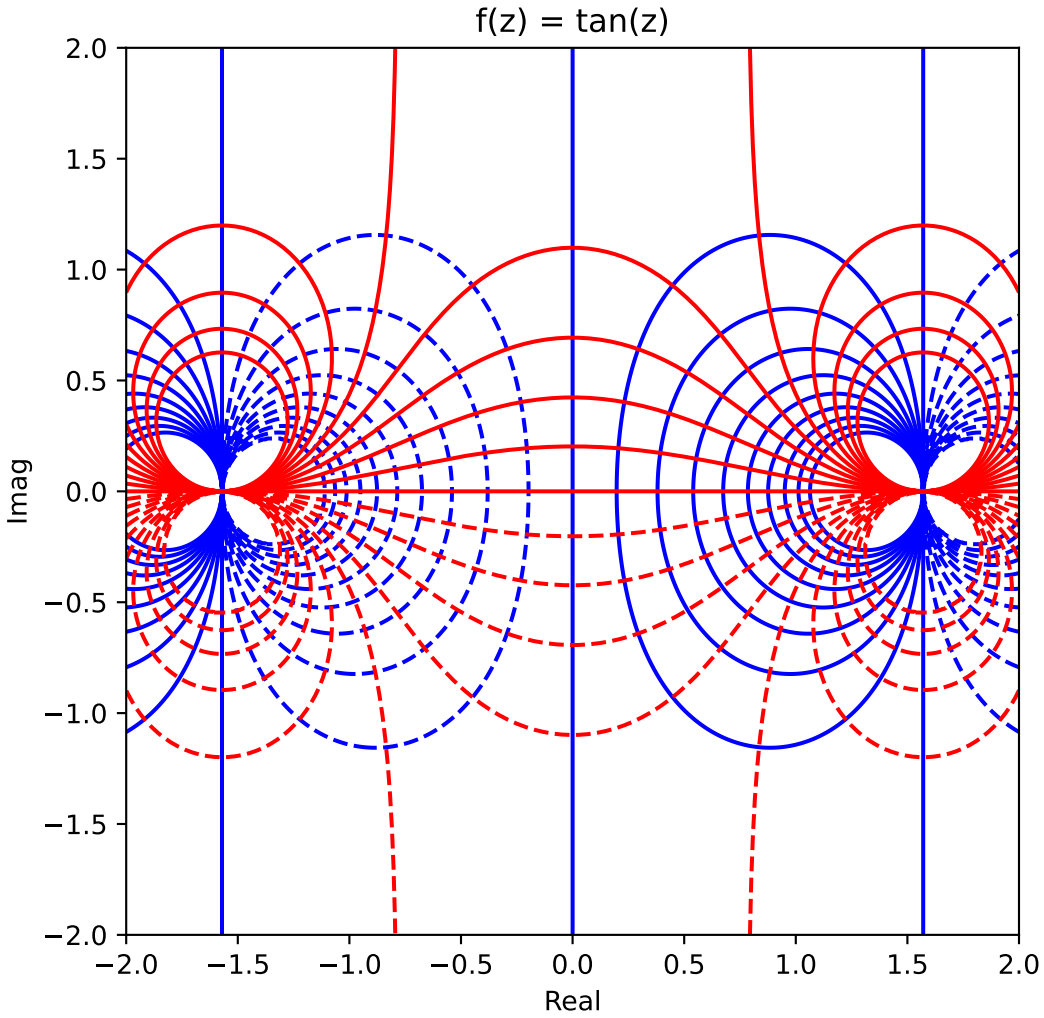

18.8.8 Complex atan function

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_8_ContourComplex.py, and the XML code in the file D01_8_ContourComplex.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        Contour2dComplex(func=np.atan, wclip=20.0, Title='f(z)=atan(z)')
```

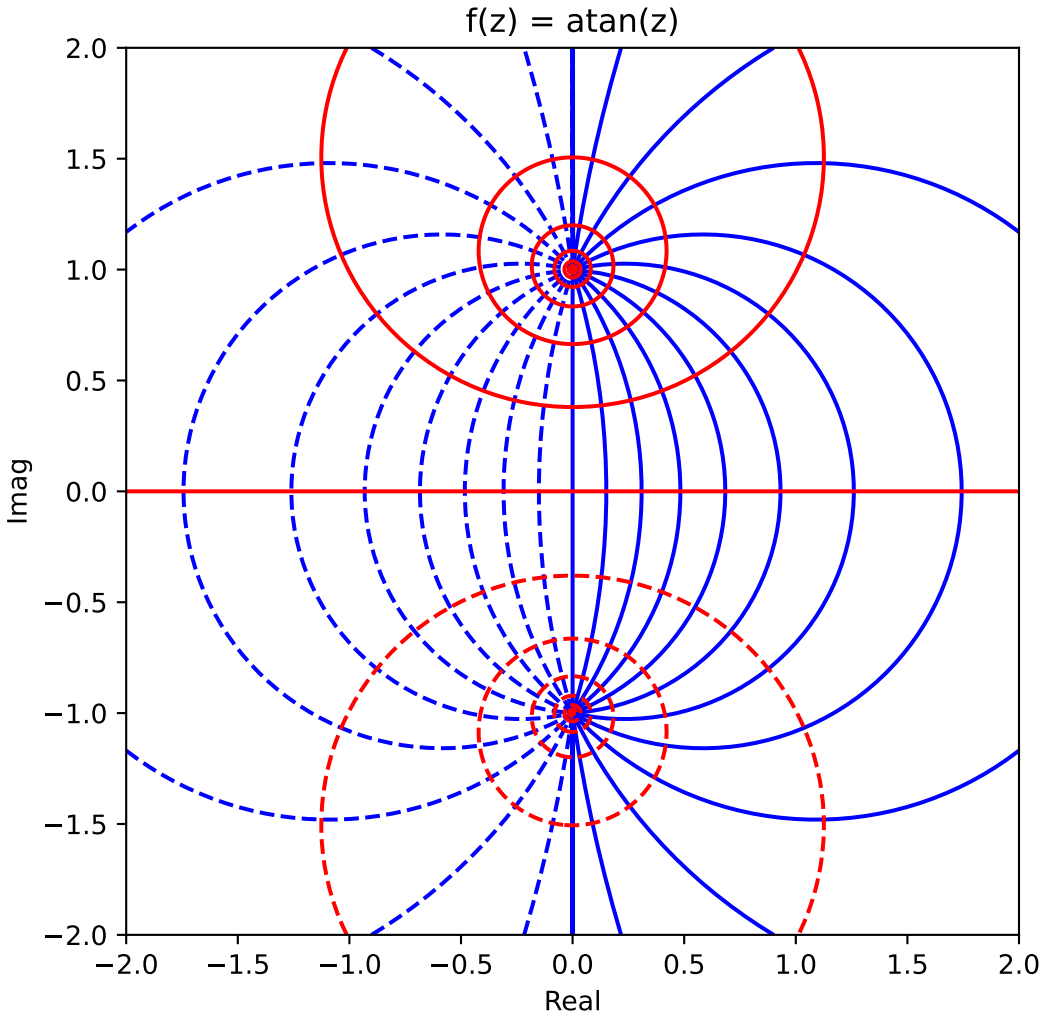

18.9 Streams, barbs and quivers (some require cartopy)

18.9.1 Streams, Electric Dipole: vector field

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_04_VectorFieldMultipole.py, and the XML code in the file D01_04_VectorFieldMultipole.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        nq_ = 2**1
        VectorFieldMultipole(nq=nq_)
```

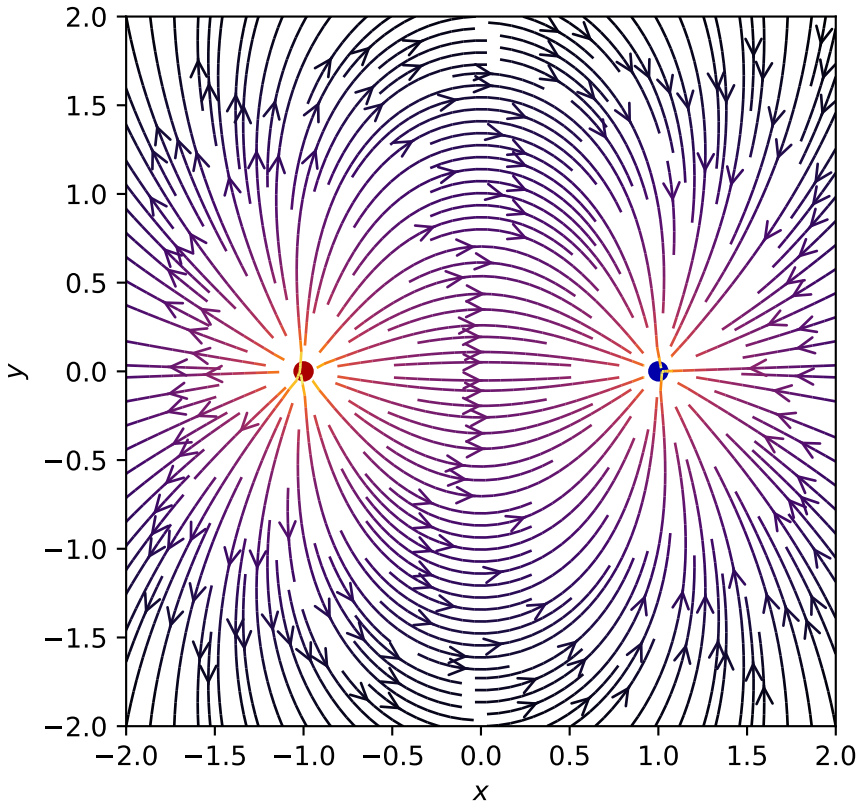

18.9.2 Streams, Electric Quadrupole: vector field

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_04_VectorFieldMultipole.py, and the XML code in the file D01_04_VectorFieldMultipole.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        nq_ = 2**2
        VectorFieldMultipole(nq=nq_)
```

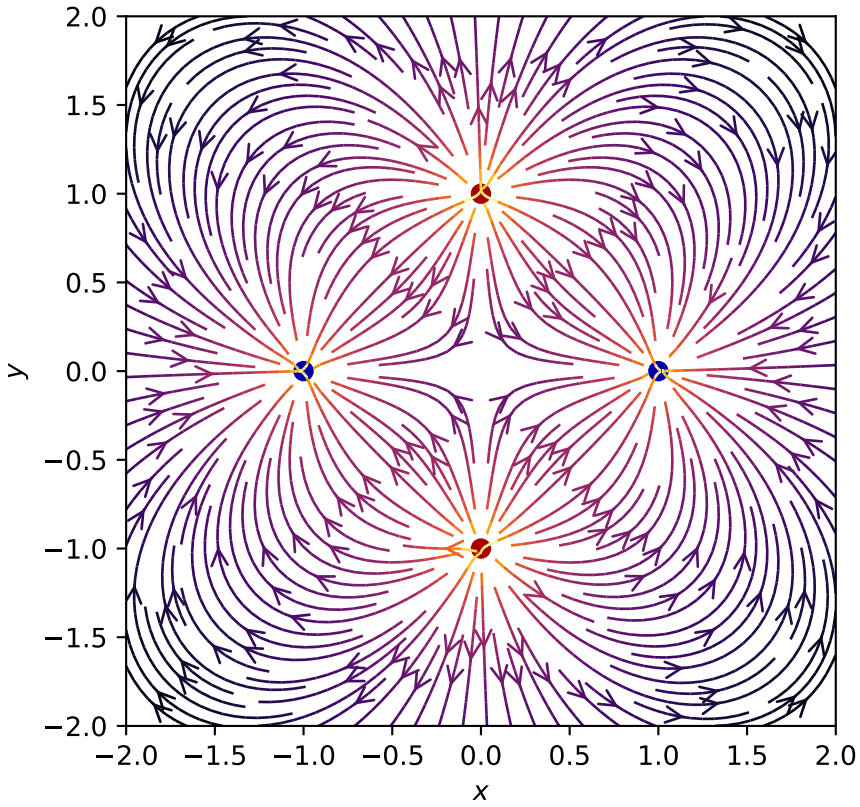

18.9.3 Streams, Electric Octopole: vector field

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_04_VectorFieldMultipole.py, and the XML code in the file D01_04_VectorFieldMultipole.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        nq_ = 2**3
        VectorFieldMultipole(nq=nq_)
```

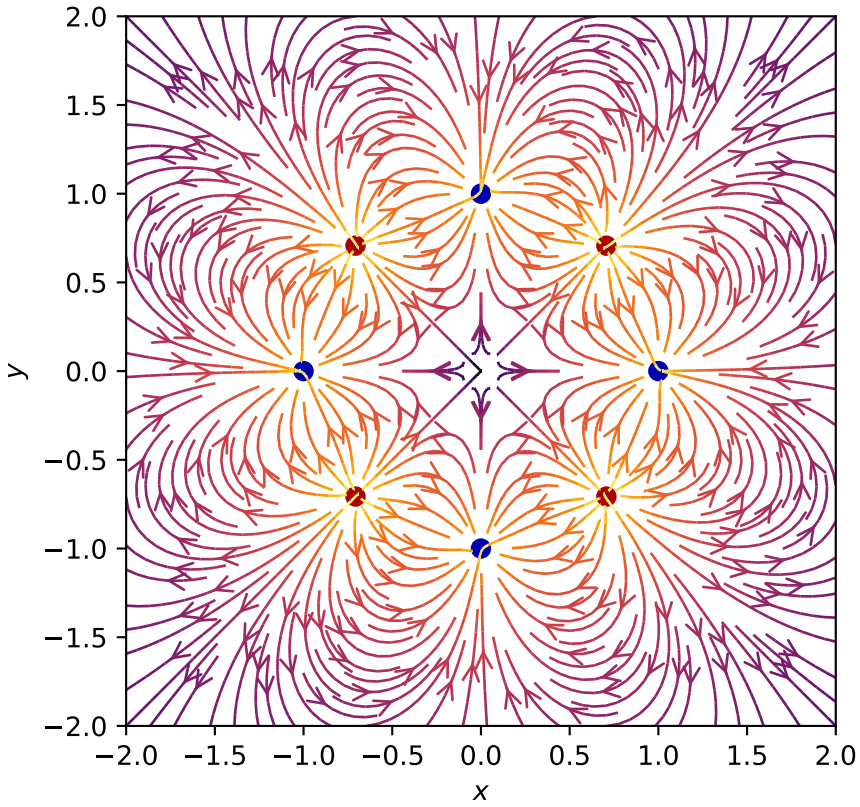

18.9.4 Streams, Electric Hexapole: vector field

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_04_VectorFieldMultipole.py, and the XML code in the file D01_04_VectorFieldMultipole.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        nq_ = 2**4
        VectorFieldMultipole(nq=nq_)
```

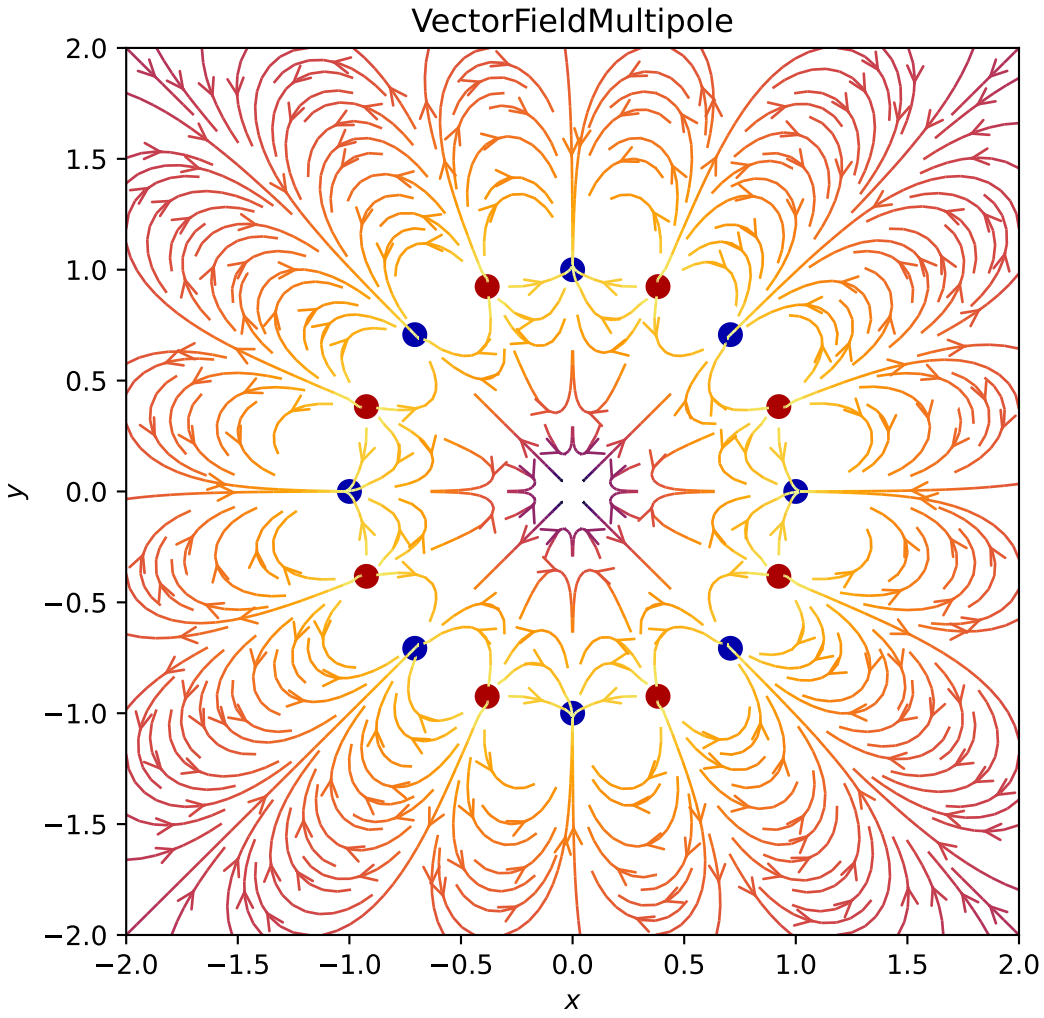

18.9.5 Streams, North Atlantic Ocean and Europe (requires cartopy)

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05_StreamsNorthAtlantic.py, and the XML code in the file D05_StreamsNorthAtlantic.2D.xml.

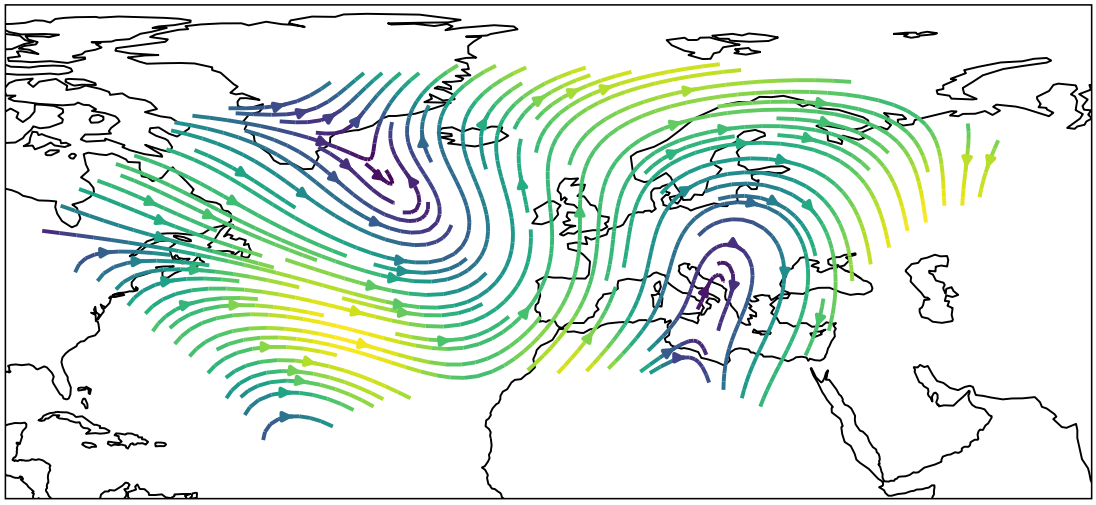

18.9.6 Quivers, North Atlantic Ocean and Europe (requires cartopy)

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06_QuiversNorthAtlantic.py, and the XML code in the file D06_QuiversNorthAtlantic.2D.xml.

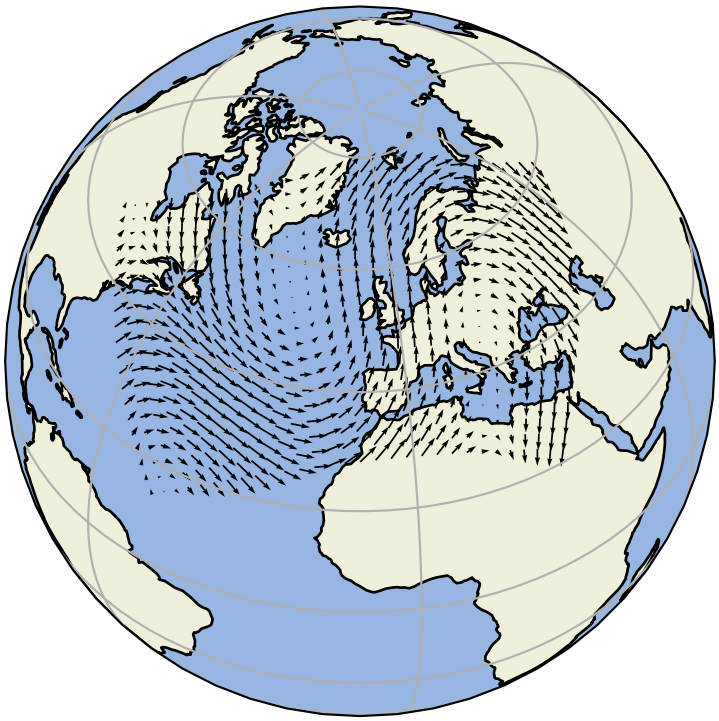

18.9.7 Quivers, plain and regridded (requires cartopy)

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07_QuiversPlainAndRegridded.py, and the XML code in the file D07_QuiversPlainAndRegridded.2D.xml.

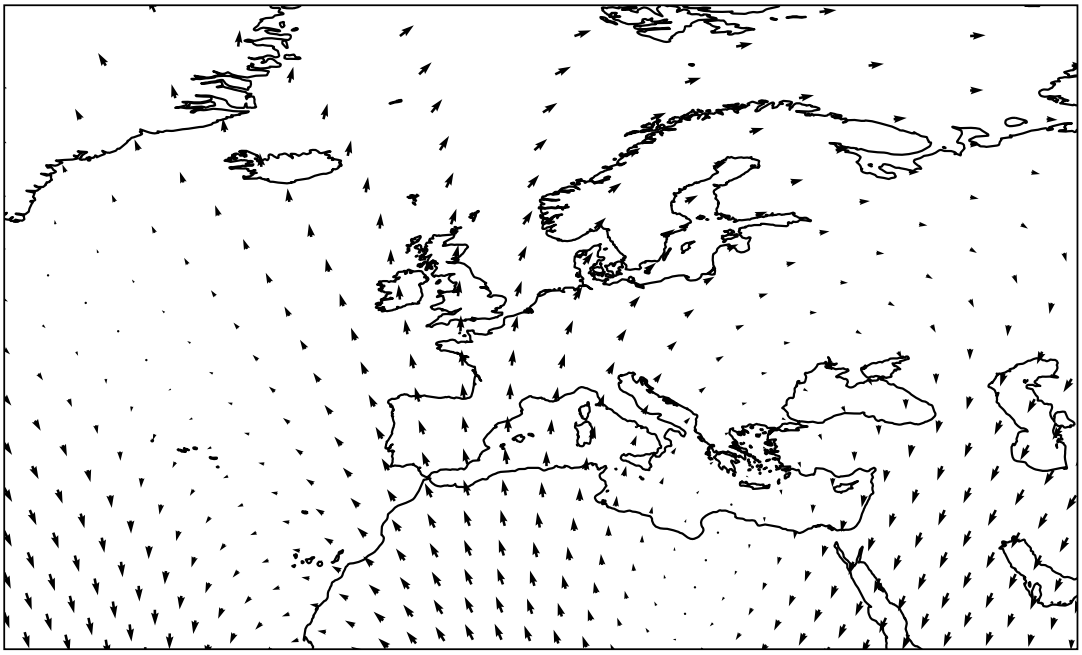

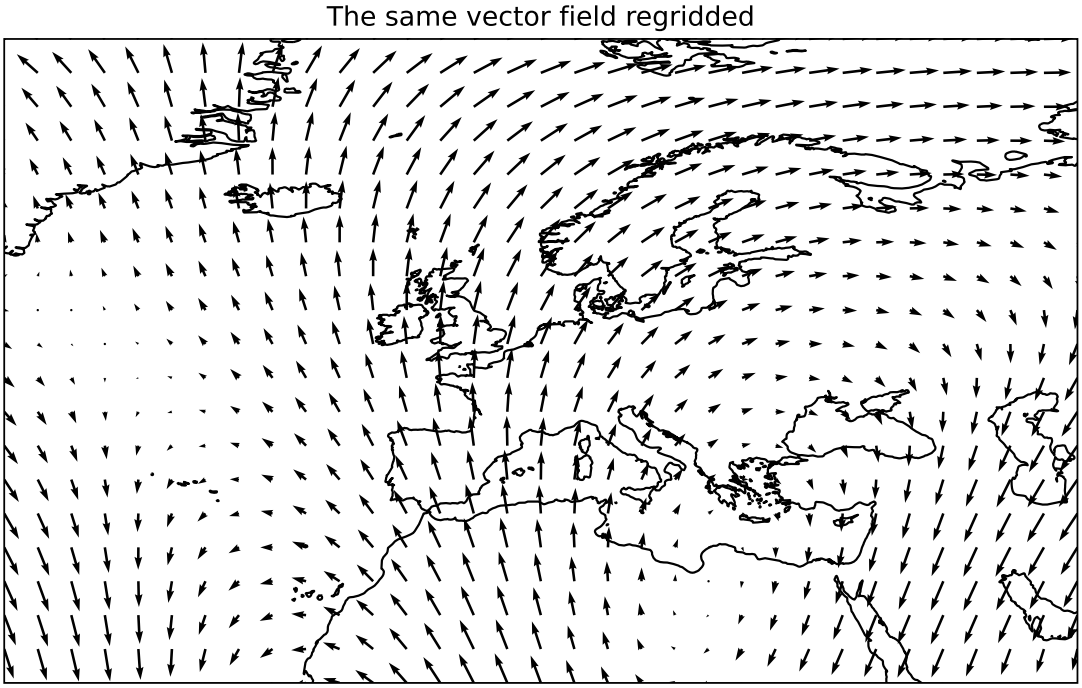

18.9.8 Barbs, North Atlantic Ocean and Europe (requires cartopy)

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D08_BarbsNorthAtlantic.py, and the XML code in the file D08_BarbsNorthAtlantic.2D.xml.

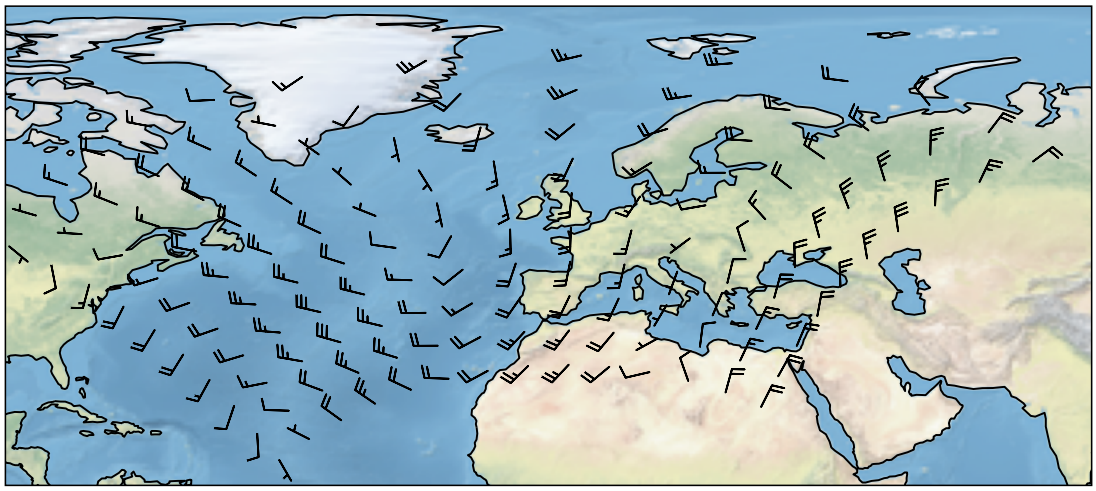

CHAPTER

NINETEEN

BITMAPS

19.1 Fractals: introduction

See also: http://www.juliasets.dk/Pictures_of_Julia_and_Mandelbrot_sets.htm

See also: http://www.3d-meier.de/, Mandelbrot und Julia Mengen

See also: http://www.dhushara.com/DarkHeart/quasif/quasi.htm (includes Kleinian fractals)

Difference Method: https://en.wikibooks.org/wiki/Fractals/Iterations_in_the_complex_plane/demm

MandelbrotSetExterior: https://en.wikibooks.org/wiki/Fractals/Iterations_in_the_complex_plane/MandelbrotSetExterior#Real_Escape_Time

Fractals/fractalzoomer: https://en.wikibooks.org/wiki/Fractals/fractalzoomer

https://en.wikipedia.org/wiki/Fractal

19.1.1 Barnsley's Fern

https://mathworld.wolfram.com/BarnsleysFern.html

https://en.wikipedia.org/wiki/Barnsley_fern

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_BarnsleyFern.py, and the XML code in the file D01_BarnsleyFern.2D.xml.

Left figure: Barnsley's Fern, 20000 points

Right figure: Barnsley's Fern, 100000 points

19.1.2 Dragon curve

https://en.wikipedia.org/wiki/Dragon_curve

https://mathworld.wolfram.com/DragonCurve.html

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02_DragonCurve.py, and the XML code in the file D02_DragonCurve.2D.xml.

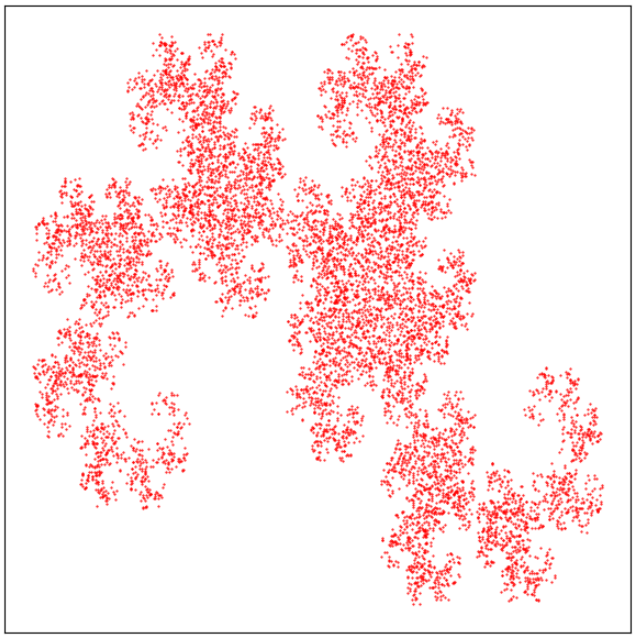

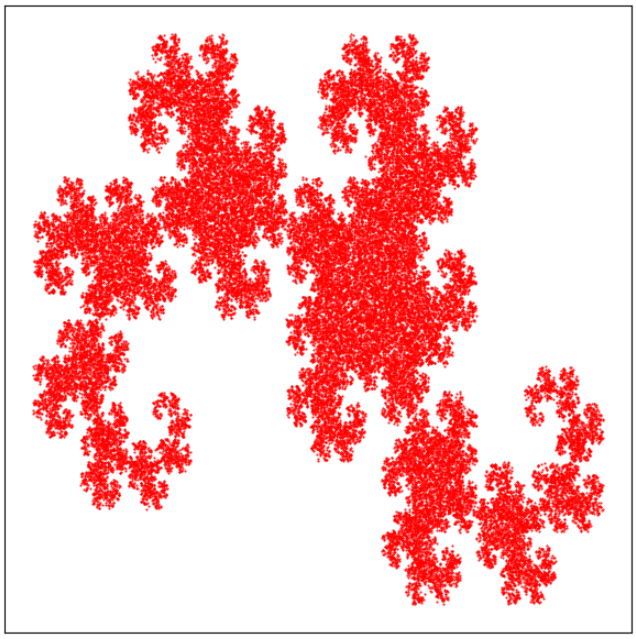

Left figure: Dragon Curve, 10000 points

Right figure: Dragon Curve, 50000 points

19.1.3 Sierpiński carpet

https://en.wikipedia.org/wiki/Sierpi%C5%84ski_carpet

https://mathworld.wolfram.com/SierpinskiCarpet.html

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03_SierpinskiCarpet.py, and the XML code in the file D03_SierpinskiCarpet.2D.xml.

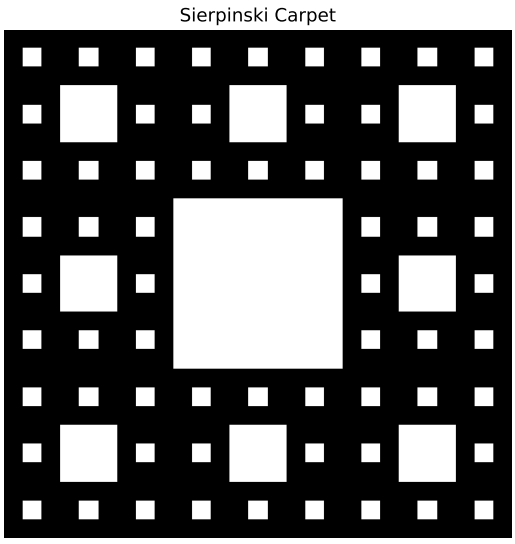

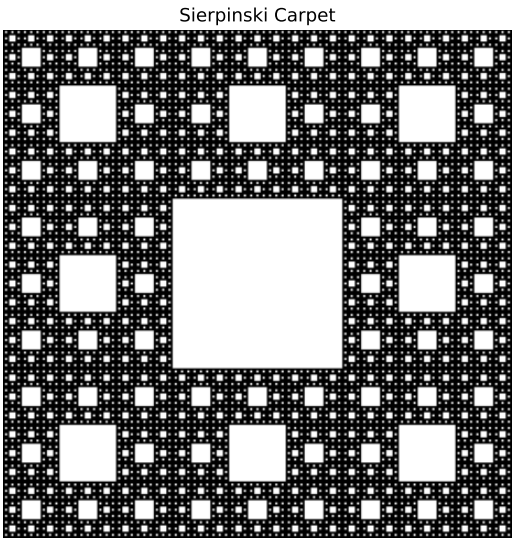

Left figure: Sierpiński carpet, $n = 3$.

Right figure: Sierpiński carpet, $n = 5$.

19.2 Fractals related to the Mandelbrot set

See also: http://www.juliasets.dk/Pictures_of_Julia_and_Mandelbrot_sets.htm

See also: http://www.3d-meier.de/, Mandelbrot und Julia Mengen

See also: http://www.dhushara.com/DarkHeart/quasif/quasi.htm (includes Kleinian fractals)

See also: https://en.wikipedia.org/wiki/Mandelbrot_set

Difference Method: https://en.wikibooks.org/wiki/Fractals/Iterations_in_the_complex_plane/demm

MandelbrotSetExterior: https://en.wikibooks.org/wiki/Fractals/Iterations_in_the_complex_plane/MandelbrotSetExterior#Real_Escape_Time

Fractals/fractalzoomer: https://en.wikibooks.org/wiki/Fractals/fractalzoomer

19.2.1 Mandelbrot set, example 1, classical set: $z_{n+1} = z_n^2 + c$

Classical formula: $z_{n+1} = z_n^2 + c$.

The Python code for the example below, *without* using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01a_Mandelbrot1.py, and the XML code in the file D01a_Mandelbrot1.2D.xml.

The Python code for the example below, using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01b_Mandelbrot1.py, and the XML code in the file D01b_Mandelbrot1.2D.xml.

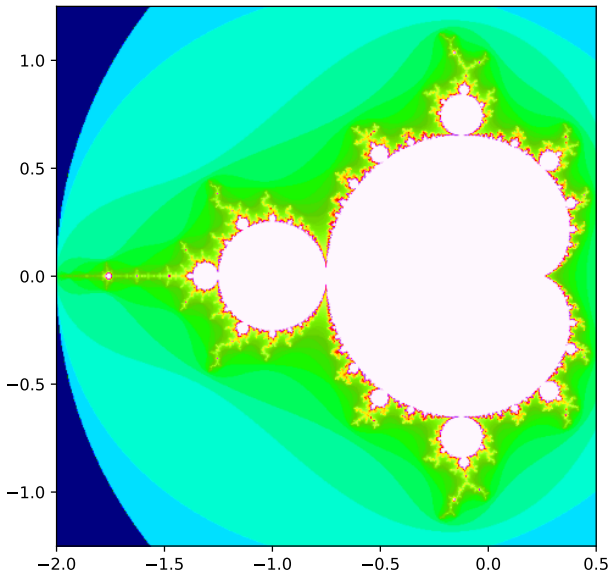

19.2.2 Mandelbrot set, example 2: higher powers

Recursion formula: $z_{n+1} = z_n^5 + c$.

The Python code for the example below, *without* using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02a_Mandelbrot2.py, and the XML code in the file D02a_Mandelbrot2.2D.xml.

The Python code for the example below, using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02b_Mandelbrot2.py, and the XML code in the file D02b_Mandelbrot2.2D.xml.

See also: https://paulbourke.net/fractals/mandelpower/

See also: http://www.3d-meier.de/, Mandelbrot und Julia Mengen

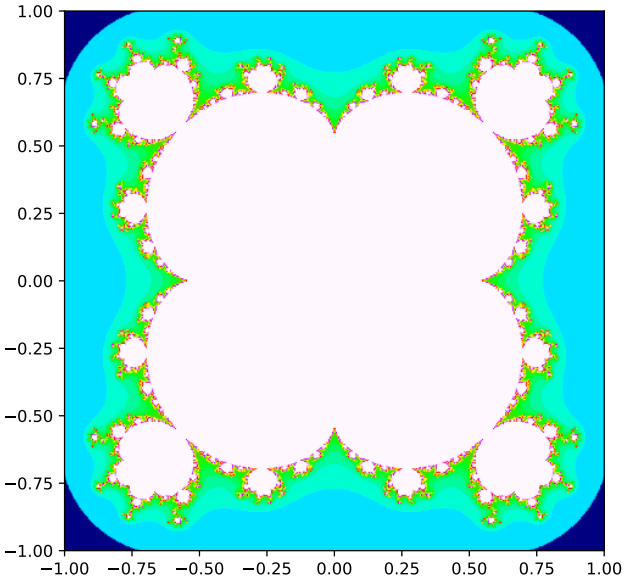

19.2.3 Mandelbrot set, example 3: $z_{n+1} = z_n^5 + \frac{c}{z_n}$

Recursion formula: $z_{n+1} = z_n^5 + \frac{c}{z_n}$.

See also: http://www.3d-meier.de/, Mandelbrot und Julia Mengen

The Python code for the example below, *without* using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03a_Mandelbrot3.py, and the XML code in the file D03a_Mandelbrot3.2D.xml.

The Python code for the example below, using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03b_Mandelbrot3.py, and the XML code in the file D03b_Mandelbrot3.2D.xml.

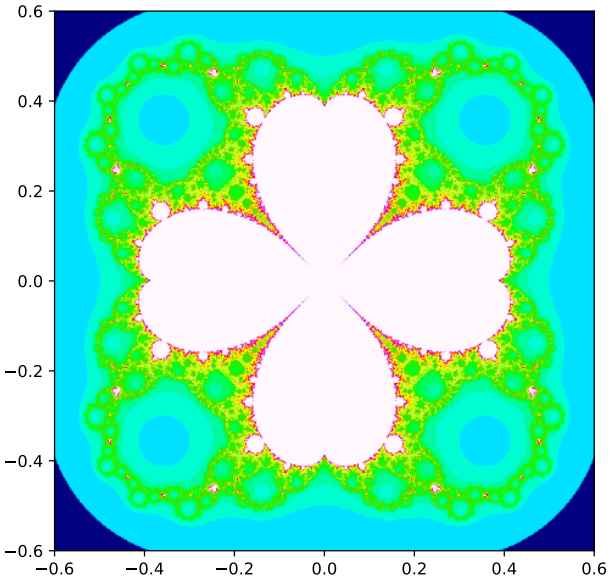

19.2.4 Mandelbrot set, example 4: $z_{n+1} = z_n^5 + \frac{c}{z_n^5}$

Recursion formula: $z_{n+1} = z_n^5 + \frac{c}{z_n^5}$.

See also: http://www.3d-meier.de/, Mandelbrot und Julia Mengen

The Python code for the example below, *without* using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04a_Mandelbrot4.py, and the XML code in the file D04a_Mandelbrot4.2D.xml.

The Python code for the example below, using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04b_Mandelbrot4.py, and the XML code in the file D04b_Mandelbrot4.2D.xml.

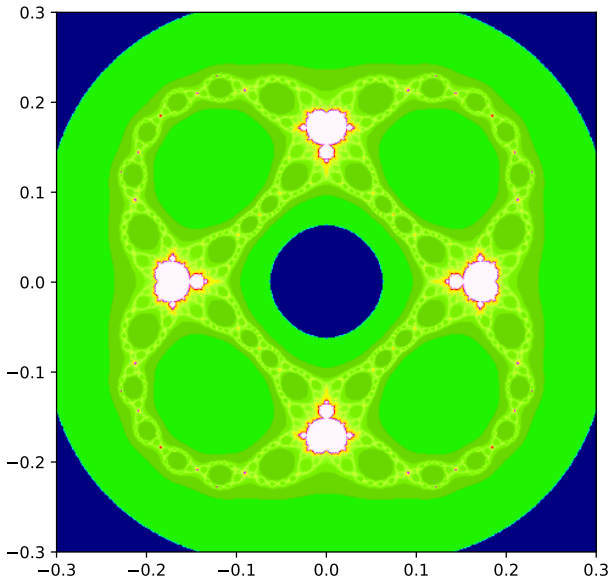

19.2.5 Mandelbrot set, example 5, "Inverse Mandelbrot"

Recursion formula: $z_{n+1} = z_n^2 + \frac{1}{c}$.

See also: http://www.3d-meier.de/, Mandelbrot und Julia Mengen

The Python code for the example below, *without* using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05a_Mandelbrot5.py, and the XML code in the file D05a_Mandelbrot5.2D.xml.

The Python code for the example below, using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05b_Mandelbrot5.py, and the XML code in the file D05b_Mandelbrot5.2D.xml.

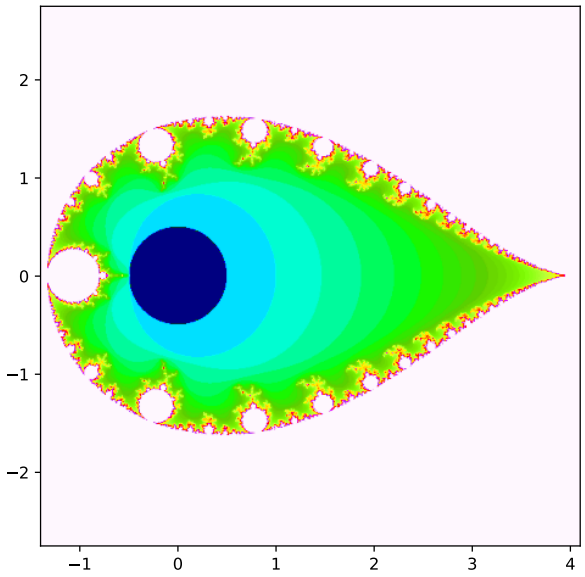

19.2.6 Mandelbrot set, example 6, "Marek Dragon Fractal":

Compare this with "Phoenix Julia fractals"

Recursion formula: $z_{n+1} = \exp(2\pi ir)z_n + z_n^2$ where r is an irrational number, in this example it is $1 - (\sqrt{2} - \sqrt{3} + \sqrt{5})/2$.

See also: https://paulbourke.net/fractals/marek/

The Python code for the example below, *without* using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06a_Mandelbrot6.py, and the XML code in the file D06a_Mandelbrot6.2D.xml.

The Python code for the example below, using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06b_Mandelbrot6.py, and the XML code in the file D06b_Mandelbrot6.2D.xml.

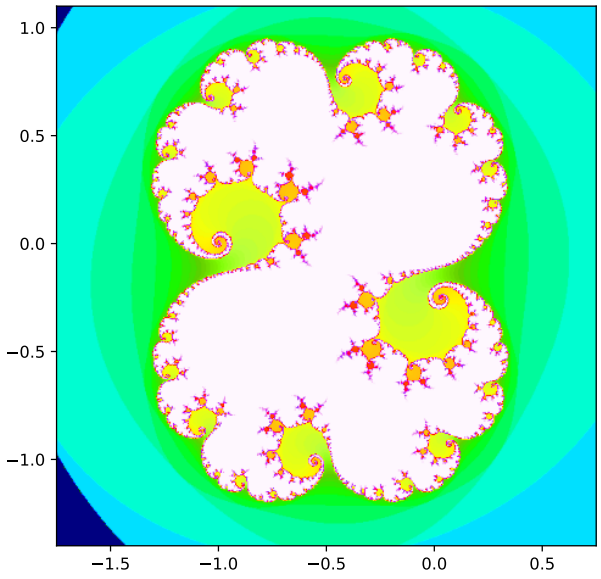

19.2.7 Mandelbrot set, example 7, "Burning Ship Fractal"

Recursion formula: $z_{n+1} = (|\Re(z_n)| + i|\Im(z_n)|)^2 + c$.

See also: http://www.3d-meier.de/, Mandelbrot und Julia Mengen

See also: https://paulbourke.net/fractals/burnship/

The Python code for the example below, *without* using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07a_Mandelbrot7.py, and the XML code in the file D07a_Mandelbrot7.2D.xml.

The Python code for the example below, using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07b_Mandelbrot7.py, and the XML code in the file D07b_Mandelbrot7.2D.xml.

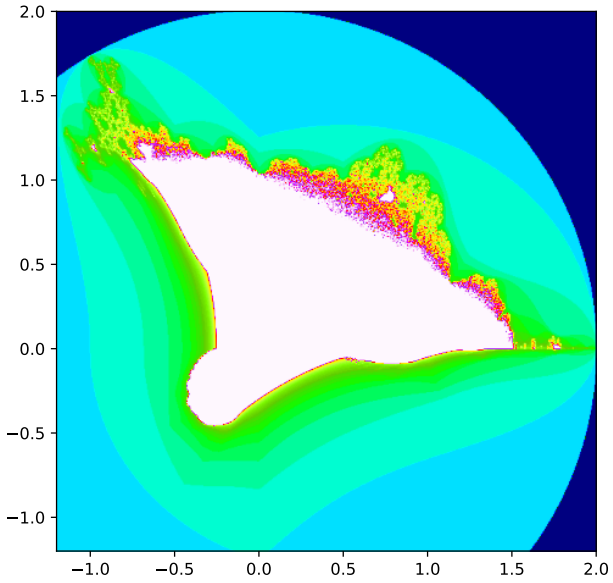

19.3 Fractals related to the Julia set

See also: http://www.3d-meier.de/, Mandelbrot und Julia Mengen

See also: https://en.wikipedia.org/wiki/Julia_set

19.3.1 Julia sets, example 1: Classical set

The Python code for the example below, *without* using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01a_Julia01.py, and the XML code in the file D01a_Julia01.2D.xml.

The Python code for the example below, using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01b_Julia01.py, and the XML code in the file D01b_Julia01.2D.xml.

See also: http://www.3d-meier.de/, Mandelbrot und Julia Mengen

See also: https://paulbourke.net/fractals/sinjulia/julia_set.py (contains suggestions for c.) in the section "QUADRATIC JULIA ITERATION AND BAILOUT".

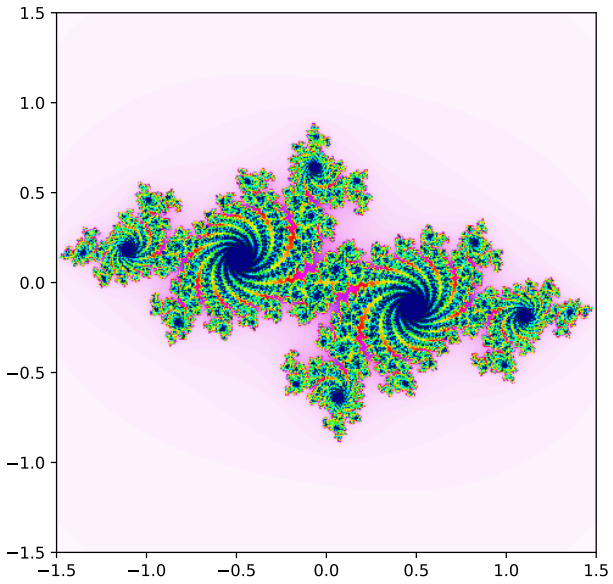

19.3.2 Julia sets, example 2: Glynn fractals

The Python code for the example below, *without* using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02a_Julia02.py, and the XML code in the file D02a_Julia02.2D.xml.

The Python code for the example below, using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02b_Julia02.py, and the XML code in the file D02b_Julia02.2D.xml.

See also: http://www.3d-meier.de/, Mandelbrot und Julia Mengen

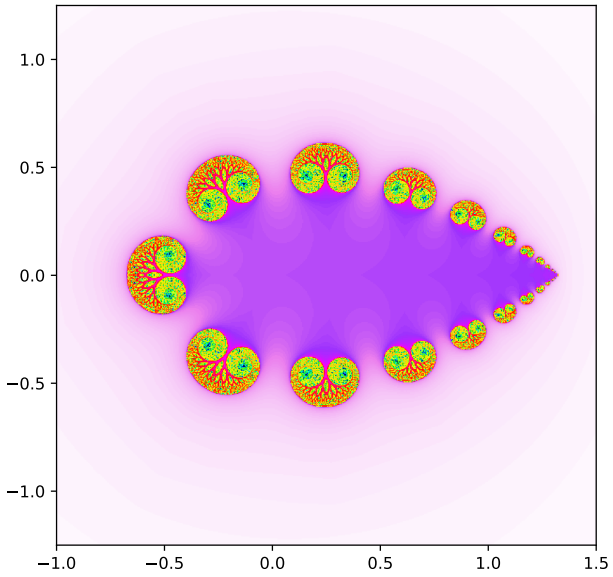

19.3.3 Julia sets, example 3: Spiral Septagon fractal

The Python code for the example below, *without* using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03a_Julia03.py, and the XML code in the file D03a_Julia03.2D.xml.

The Python code for the example below, using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03b_Julia03.py, and the XML code in the file D03b_Julia03.2D.xml.

See also: https://paulbourke.net/fractals/septagon/

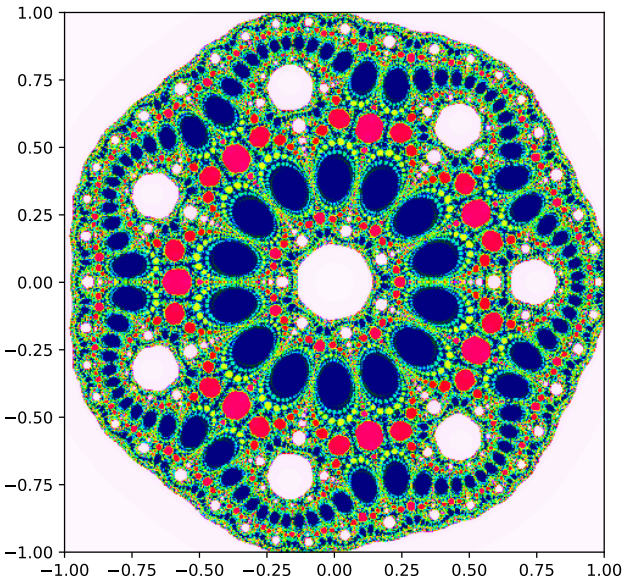

19.3.4 Julia sets, example 4: Reuleaux Triangle fractal

The Python code for the example below, *without* using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04a_Julia04.py, and the XML code in the file D04a_Julia04.2D.xml.

The Python code for the example below, using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04b_Julia04.py, and the XML code in the file D04b_Julia04.2D.xml.

See also: https://paulbourke.net/fractals/triangle/

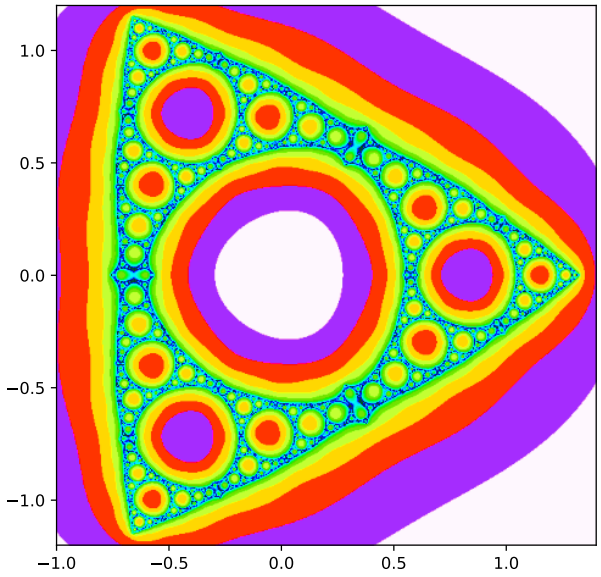

19.3.5 Julia sets, example 5: Phoenix Julia fractals

The Python code for the example below, *without* using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05a_Julia05.py, and the XML code in the file D05a_Julia05.2D.xml.

The Python code for the example below, using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05b_Julia05.py, and the XML code in the file D05b_Julia05.2D.xml.

Compare this with "Marek Dragon"

See also: https://paulbourke.net/fractals/phoenix_julia/

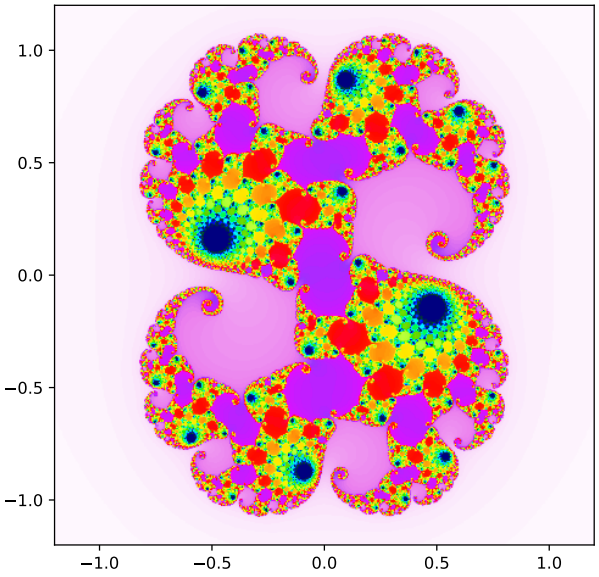

19.3.6 Julia sets, example 6: Cubic Julia fractals

The Python code for the example below, *without* using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06a_Julia06.py, and the XML code in the file D06a_Julia06.2D.xml.

The Python code for the example below, using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06b_Julia06.py, and the XML code in the file D06b_Julia06.2D.xml.

See also: https://paulbourke.net/fractals/cubicjulia/

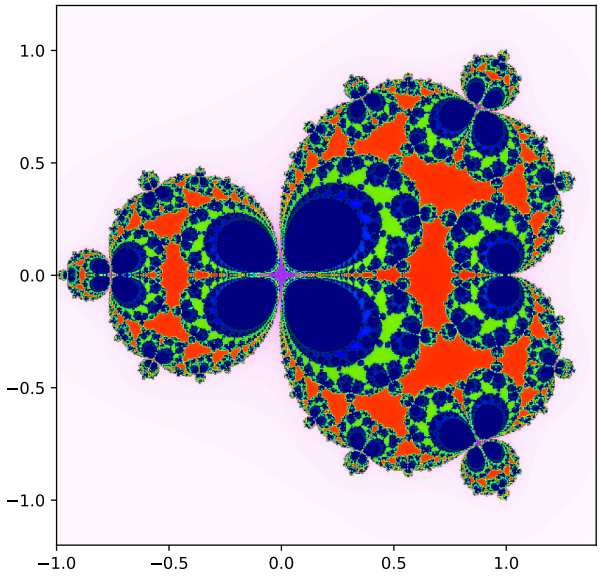

19.3.7 Julia sets, example 7: Spiral Julia fractal (uses $z_{n+1} = \tan(z_n^2 + c)$)

The Python code for the example below, *without* using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07a_Julia07.py, and the XML code in the file D07a_Julia07.2D.xml.

The Python code for the example below, using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07b_Julia07.py, and the XML code in the file D07b_Julia07.2D.xml.

See also: https://paulbourke.net/fractals/spiraljulia/

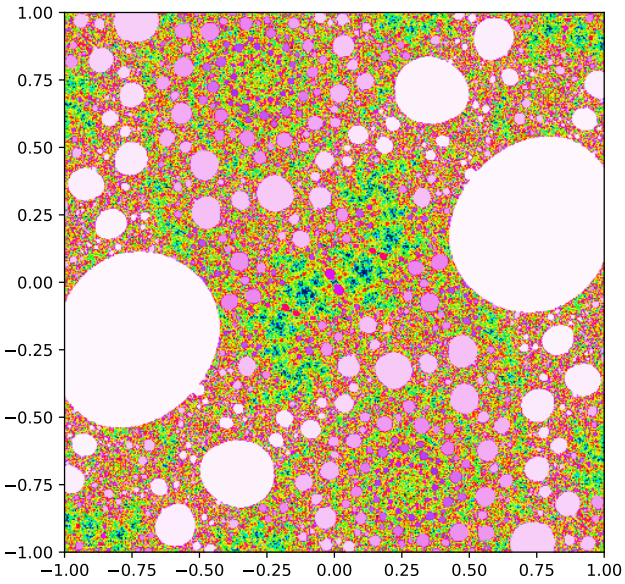

19.3.8 Julia sets, example 8: Julia set of $\sin(z)$

To do this we form the series $zk + 1 = csin(zk)$, starting with some initial $z0$.

See also: https://paulbourke.net/fractals/sinjulia/julia_set.py

See also: http://www.3d-meier.de/, Mandelbrot und Julia Mengen, 4.7. zn+1 = c sin(zn)

The behaviour of this series determines whether or not the initial z0 is part of the julia set or not. More precisely, if the series tends to infinity then z0 is part of the Julia set, otherwise it isn't. In the examples shown on the right the white regions are in the Julia set, black points are outside the Julia set.

To create images of the Julia set we map pixels in the image onto values of z0 and colour the pixel dependent on the behaviour of the series. In the examples on the right the image is mapped onto the range +-2pi in both the real and imaginary axes. The series is tested after 50 terms, it is decided that it tends to infinity if the absolute value of the imaginary part of zk is greater than 50.

See also: https://paulbourke.net/fractals/sinjulia/

The Python code for the example below, *without* using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D08a_Julia08.py, and the XML code in the file D08a_Julia08.2D.xml.

The Python code for the example below, using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D08b_Julia08.py, and the XML code in the file D08b_Julia08.2D.xml.

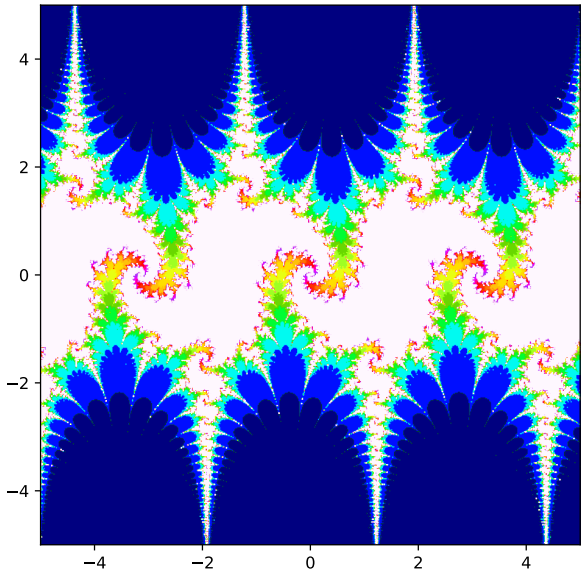

19.3.9 Julia sets, example 9: Julia09 fractals

The Python code for the example below, *without* using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D09a_Julia09.py, and the XML code in the file D09a_Julia09.2D.xml.

The Python code for the example below, using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D09b_Julia09.py, and the XML code in the file D09b_Julia09.2D.xml.

See also: https://paulbourke.net/fractals/cubicjulia/

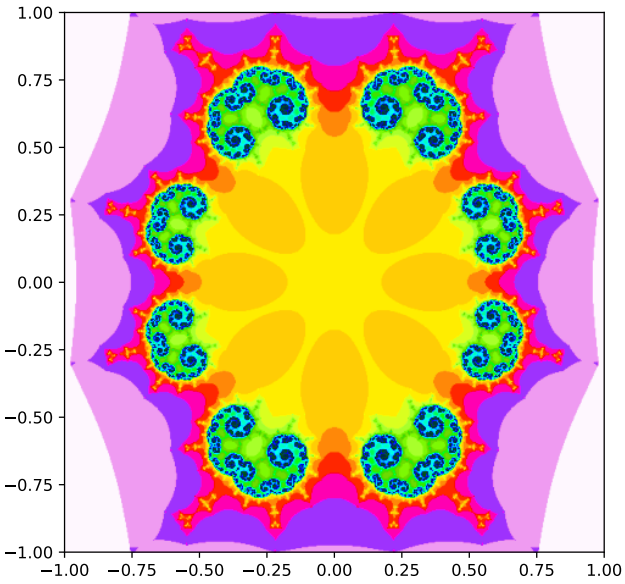

19.3.10 Julia sets, example 10: Julia10 fractals

The Python code for the example below, *without* using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D10a_Julia10.py, and the XML code in the file D10a_Julia10.2D.xml.

The Python code for the example below, using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D10b_Julia10.py, and the XML code in the file D10b_Julia10.2D.xml.

See also: https://paulbourke.net/fractals/cubicjulia/

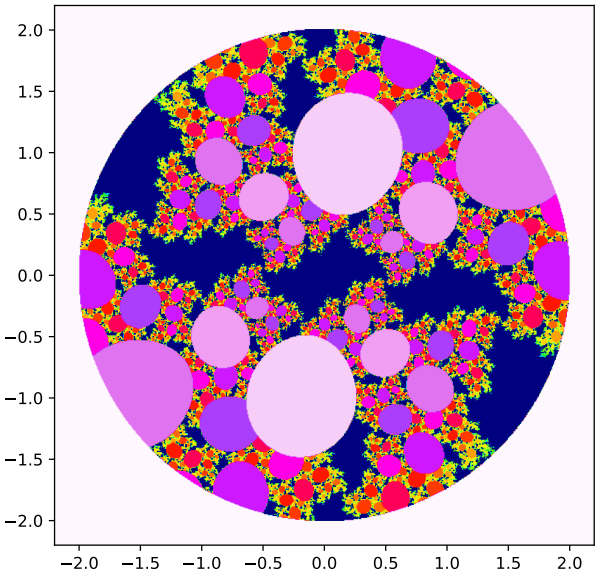

19.3.11 Julia sets, example 11: Julia11 fractals

The Python code for the example below, *without* using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D11a_Julia11.py, and the XML code in the file D11a_Julia11.2D.xml.

The Python code for the example below, using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D11b_Julia11.py, and the XML code in the file D11b_Julia11.2D.xml.

See also: https://paulbourke.net/fractals/cubicjulia/

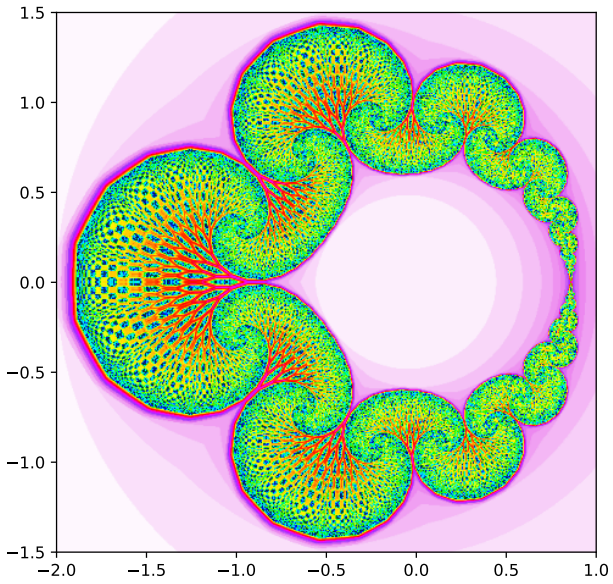

19.4 Newton Fractals

See also: http://yozh.org/2012/10/02/newton_fractals/

See also: http://www.3d-meier.de/, Mandelbrot und Julia Mengen

See also: https://en.wikipedia.org/wiki/Newton_fractal

19.4.1 Newton, zeros of $z^3 - 1$

The Python code for the example below, *without* using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01a_Newton1.py, and the XML code in the file D01a_Newton1.2D.xml.

The Python code for the example below, using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01b_Newton1.py, and the XML code in the file D01b_Newton1.2D.xml.

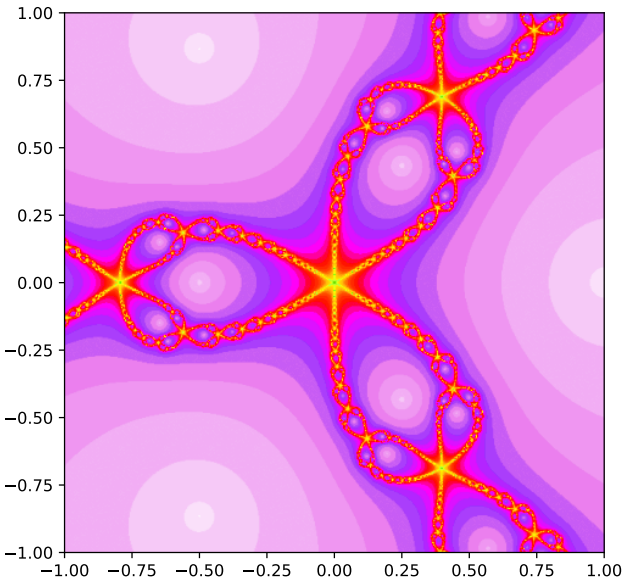

19.4.2 Newton, zeros of $\cos(z)$

The Python code for the example below, *without* using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02a_Newton2.py, and the XML code in the file D02a_Newton2.2D.xml.

The Python code for the example below, using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02b_Newton2.py, and the XML code in the file D02b_Newton2.2D.xml.

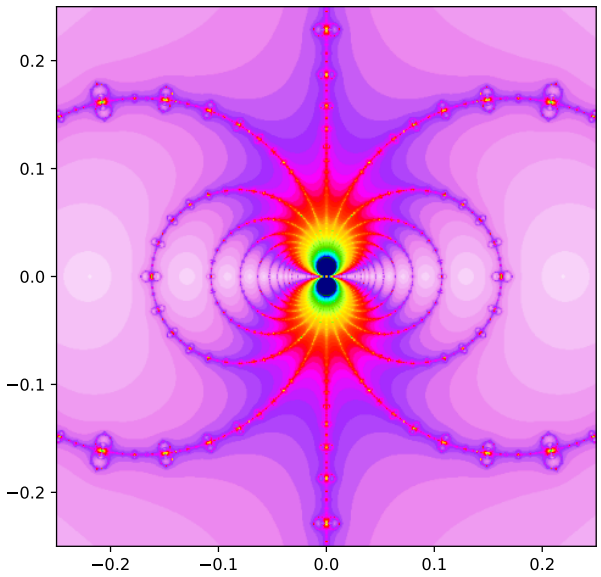

19.4.3 Modified Newton (containing an error), zeros of $z^3 - 1$

The Python code for the example below, *without* using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03a_Newton3.py, and the XML code in the file D03a_Newton3.2D.xml.

The Python code for the example below, using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03b_Newton3.py, and the XML code in the file D03b_Newton3.2D.xml.

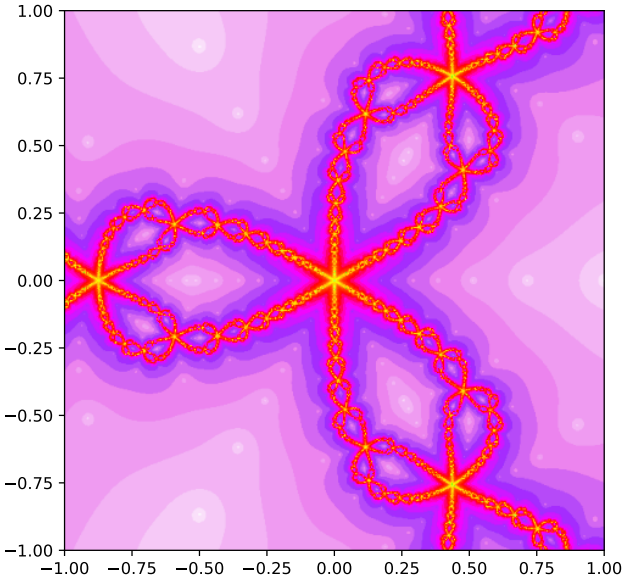

19.4.4 Modified Newton (containing an error), not converging

The Python code for the example below, *without* using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04a_Newton4.py, and the XML code in the file D04a_Newton4.2D.xml.

The Python code for the example below, using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04b_Newton4.py, and the XML code in the file D04b_Newton4.2D.xml.

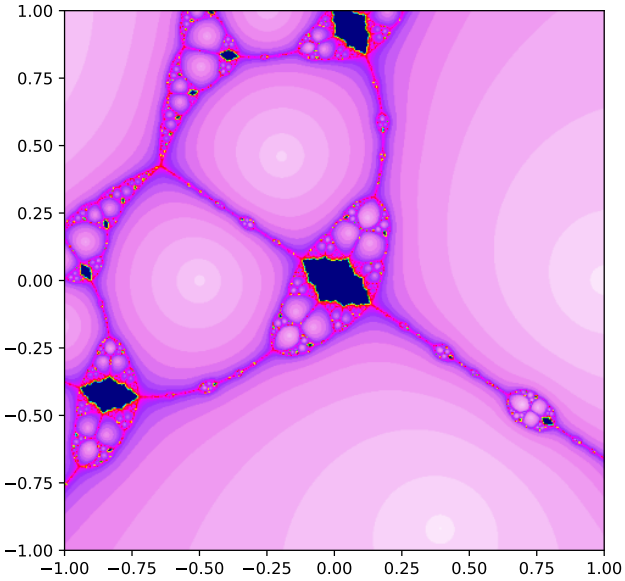

19.4.5 Halley, zeros of $z^3 - 1$

The Python code for the example below, *without* using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05a_Newton5.py, and the XML code in the file D05a_Newton5.2D.xml.

The Python code for the example below, using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05b_Newton5.py, and the XML code in the file D05b_Newton5.2D.xml.

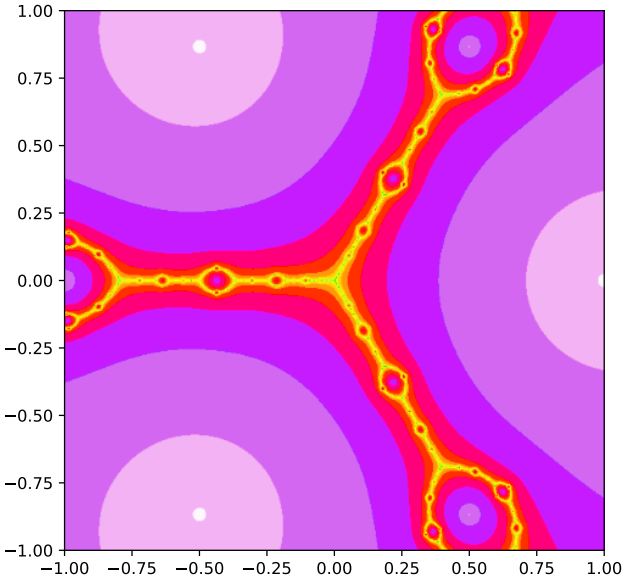

19.4.6 Halley, zeros of $\cos(z)$

The Python code for the example below, *without* using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06a_Newton6.py, and the XML code in the file D06a_Newton6.2D.xml.

The Python code for the example below, using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06b_Newton6.py, and the XML code in the file D06b_Newton6.2D.xml.

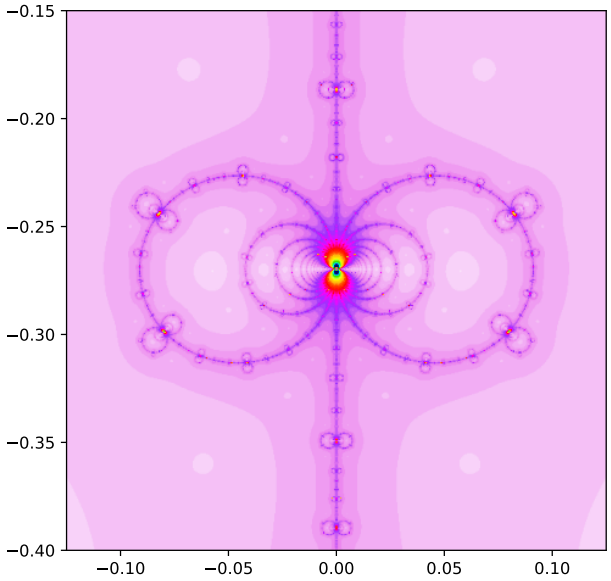

19.4.7 Modified Halley (containing an error), zeros of $z^3 - 1$

The Python code for the example below, *without* using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07a_Newton7.py, and the XML code in the file D07a_Newton7.2D.xml.

The Python code for the example below, using `numba`, can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07b_Newton7.py, and the XML code in the file D07b_Newton7.2D.xml.

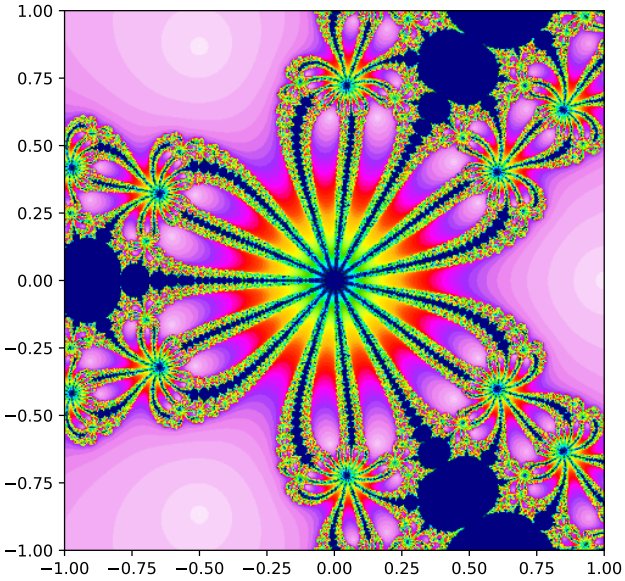

19.5 Domain coloring

See also: https://www.dynamicmath.xyz/domain-coloring/

See also: https://iquilezles.org/articles/palettes/

See also: https://github.com/jcponce/complex/tree/gh-pages/dctools

See also: Wegert [790].

See also: Matplotlib and MayaVi implementation of domain coloring by E. Petrisor, https://nbviewer.org/github/empet/Math/blob/master/DomainColoring.ipynb

See also: https://en.wikipedia.org/wiki/Domain_coloring

See also: https://notebook.community/empet/Math/DomainColoring

19.5.1 Domain coloring without contours: $f(z) = (z^3 - 1)/z$

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_DomainColoring.py, and the XML code in the file D01_DomainColoringRF1.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        DomainColoring(func=lambda z:(z**3-1)/z, style='c', re=[-1.5, 1.5],
            im=[-1.5, 1.5], Title=r'$f(z)=\dfrac{z^3-1}{z}$', daxis=True)
```

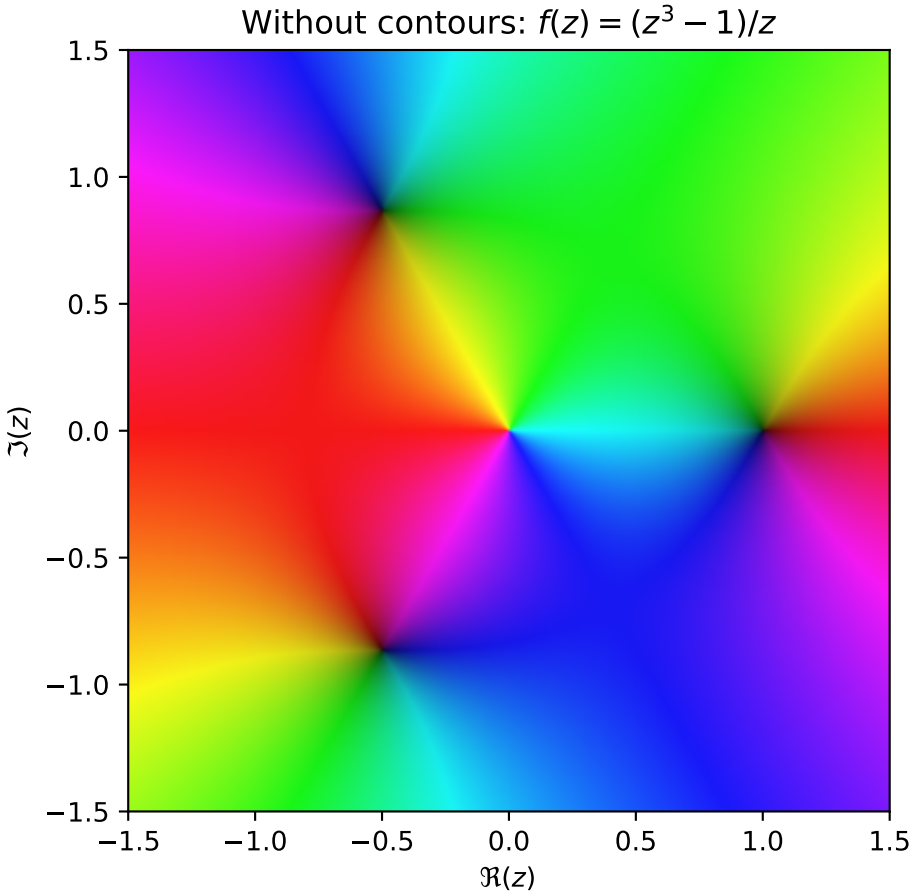

19.5.2 Domain coloring with contours of the phase: $f(z) = (z^3 - 1)/z$

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_DomainColoring.py, and the XML code in the file D01_DomainColoringRF1.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        DomainColoring(func=lambda z:(z**3-1)/z, style='p', re=[-1.5, 1.5],
            im=[-1.5, 1.5], Title=r'$f(z)=\dfrac{z^3-1}{z}$', daxis=True)
```

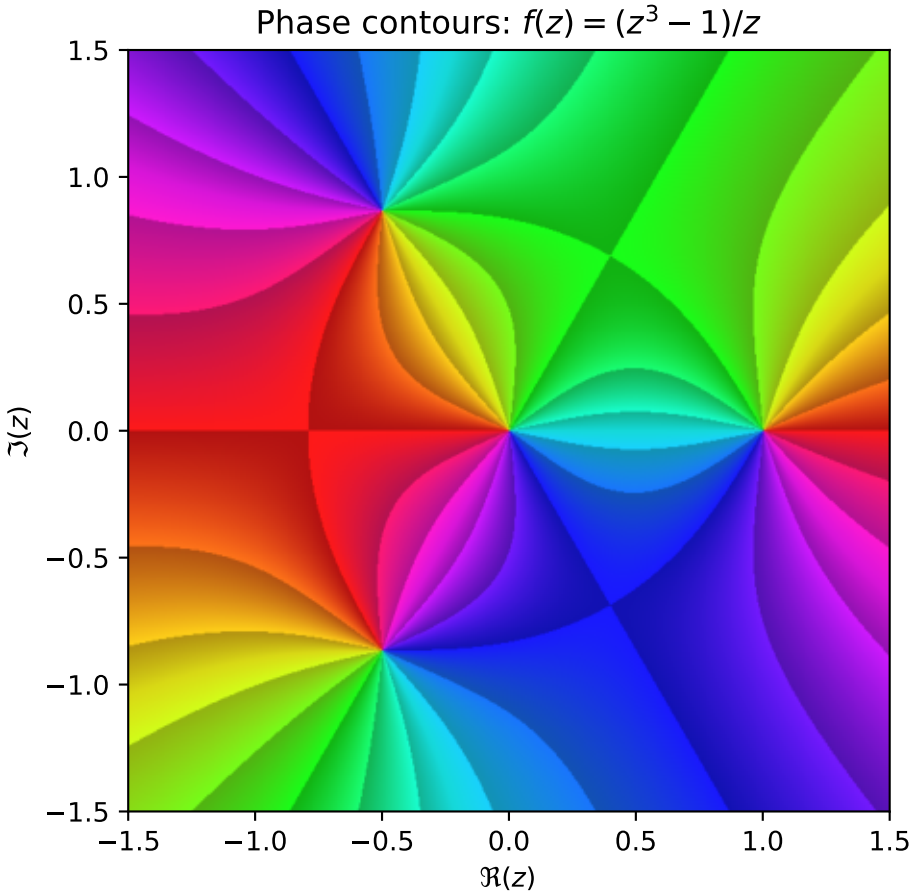

19.5.3 Domain coloring with contours of the modulus: $f(z) = (z^3 - 1)/z$

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_DomainColoring.py, and the XML code in the file D01_DomainColoringRF1.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        DomainColoring(func=lambda z:(z**3-1)/z, style='m', re=[-1.5, 1.5],
            im=[-1.5, 1.5], Title=r'$f(z)=\dfrac{z^3-1}{z}$', daxis=True)
```

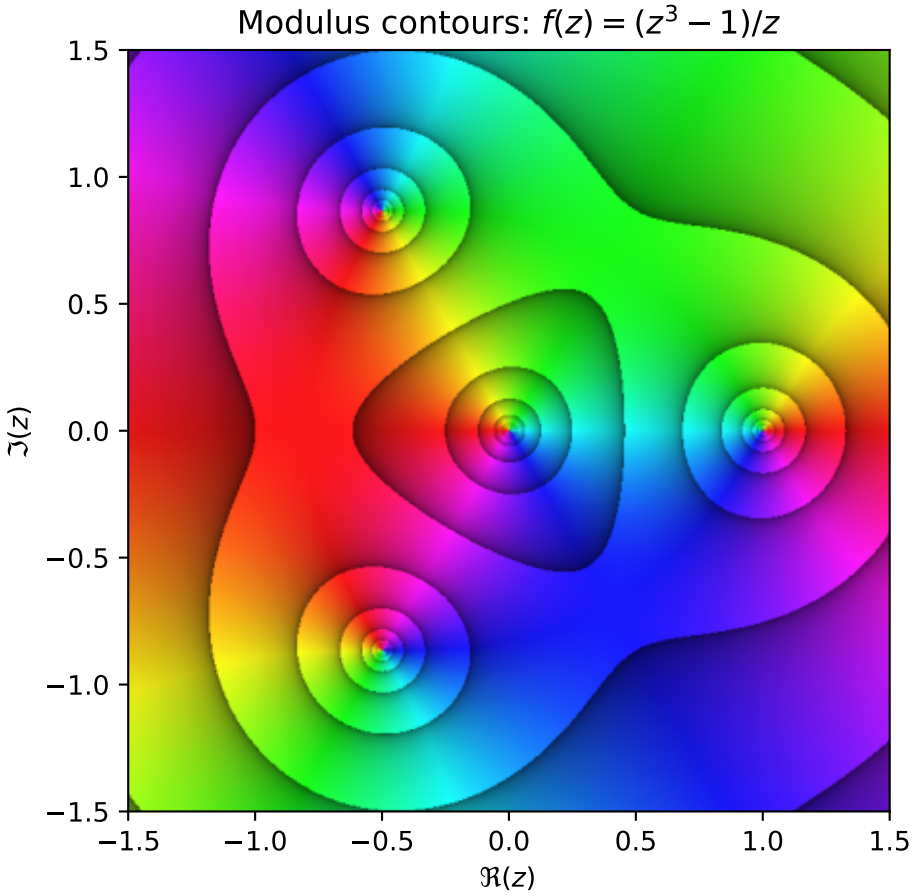

19.5.4 Domain coloring with contours of phase and modulus: $f(z) = (z^3 - 1)/z$

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_DomainColoring.py, and the XML code in the file D01_DomainColoringRF1.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        DomainColoring(func=lambda z:(z**3-1)/z, style='pm', re=[-1.5, 1.5],
            im=[-1.5, 1.5], Title=r'$f(z)=\dfrac{z^3-1}{z}$', daxis=True)
```

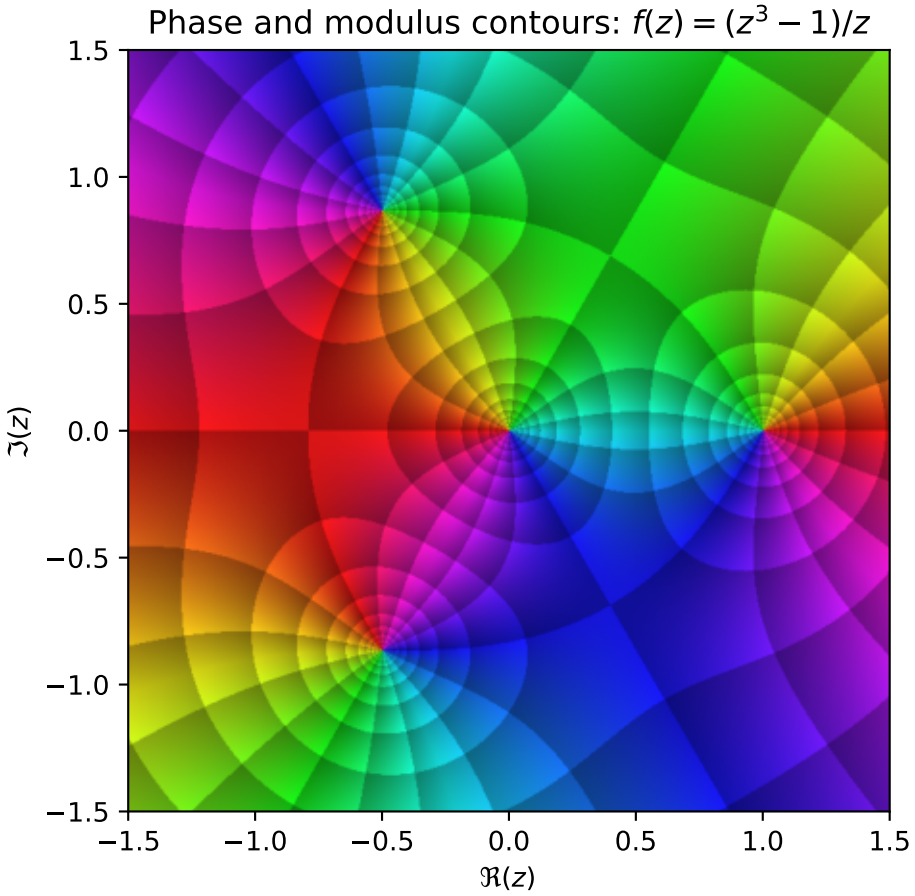

19.5.5 Domain coloring with contours of phase and modulus: $f(z) = z^5 + z$

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_DomainColoring.py, and the XML code in the file D01_DomainColoringRF1.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        DomainColoring(func=lambda z:z**5 + z, style='pm', re=[-2, 2],
            im=[-2, 2], Title=r'$f(z)=(z^5+z)$', daxis=True)
```

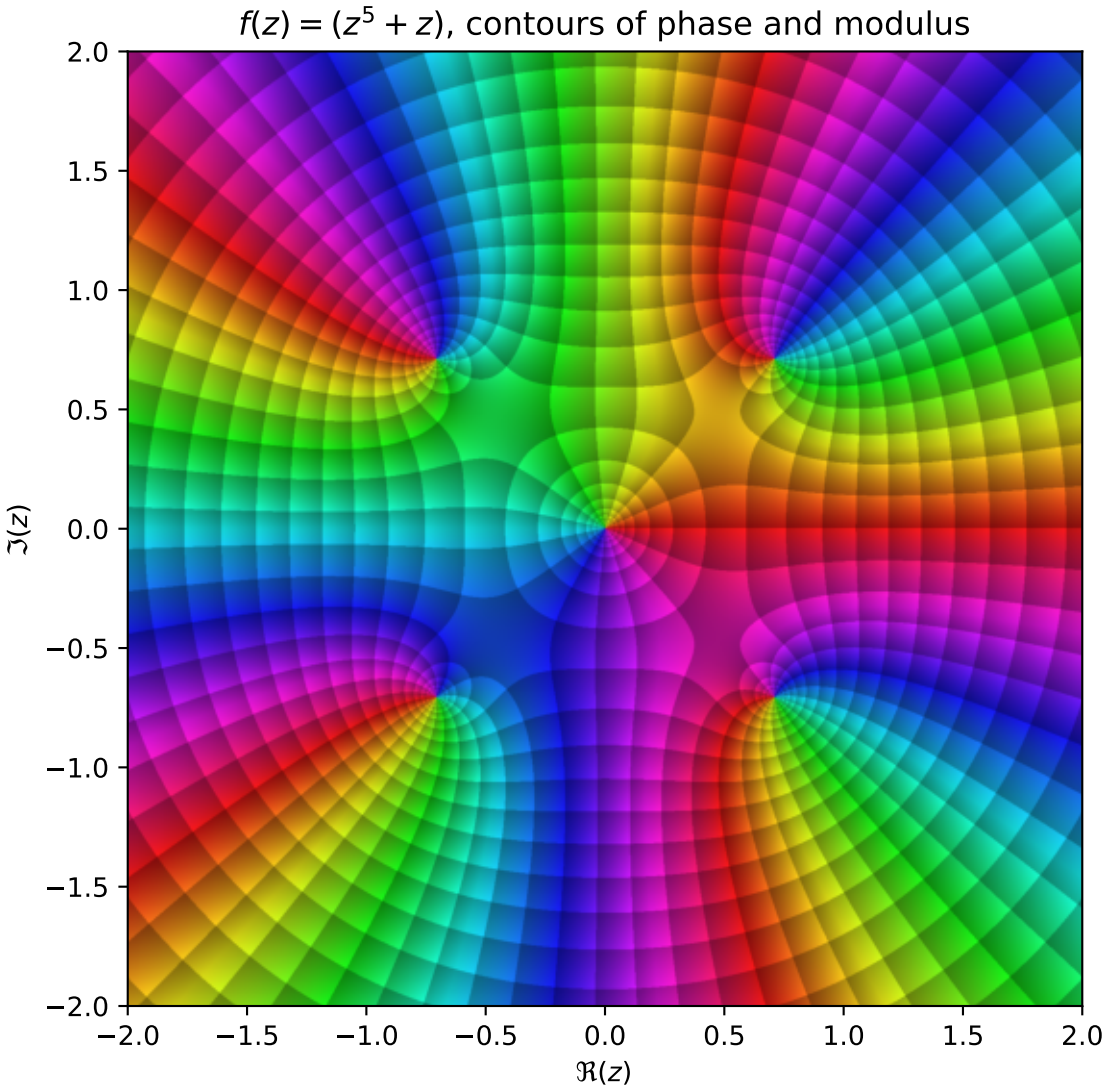

19.5.6 Domain coloring with contours of phase and modulus: $f(z) = (z^6 - 1)/(z^{12} + 1)$

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_DomainColoring.py, and the XML code in the file D01_DomainColoringRF1.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        DomainColoring(func=lambda z:(z**6-1) / (z**12+1), style='pm', re=[-2.0, 2.0],
            im=[-2.0, 2.0], Title=r'$f(z)=\dfrac{z^6-1}{z^{12}+1}$', daxis=True)
```

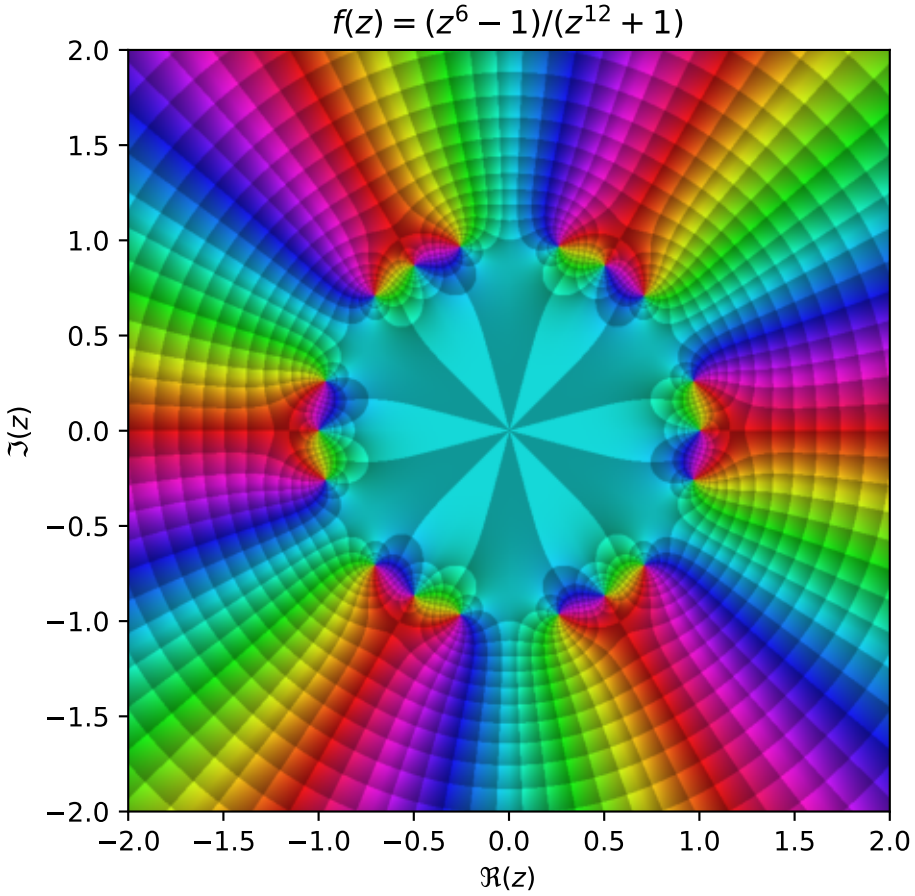

19.5.7 Domain coloring with contours of phase and modulus: $f(z) = (z - 0.5(1 + i))/z^2$

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_DomainColoring.py, and the XML code in the file D01_DomainColoringRF1.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        DomainColoring(func=lambda z:(z - 0.5 - 0.5*1j) / z**2, style='pm', re=[-1.5, 1.5],
            im=[-1.5, 1.5], Title=r'$f(z)=\dfrac{z-0.5(1+i)}{z^2}$', daxis=True)
```

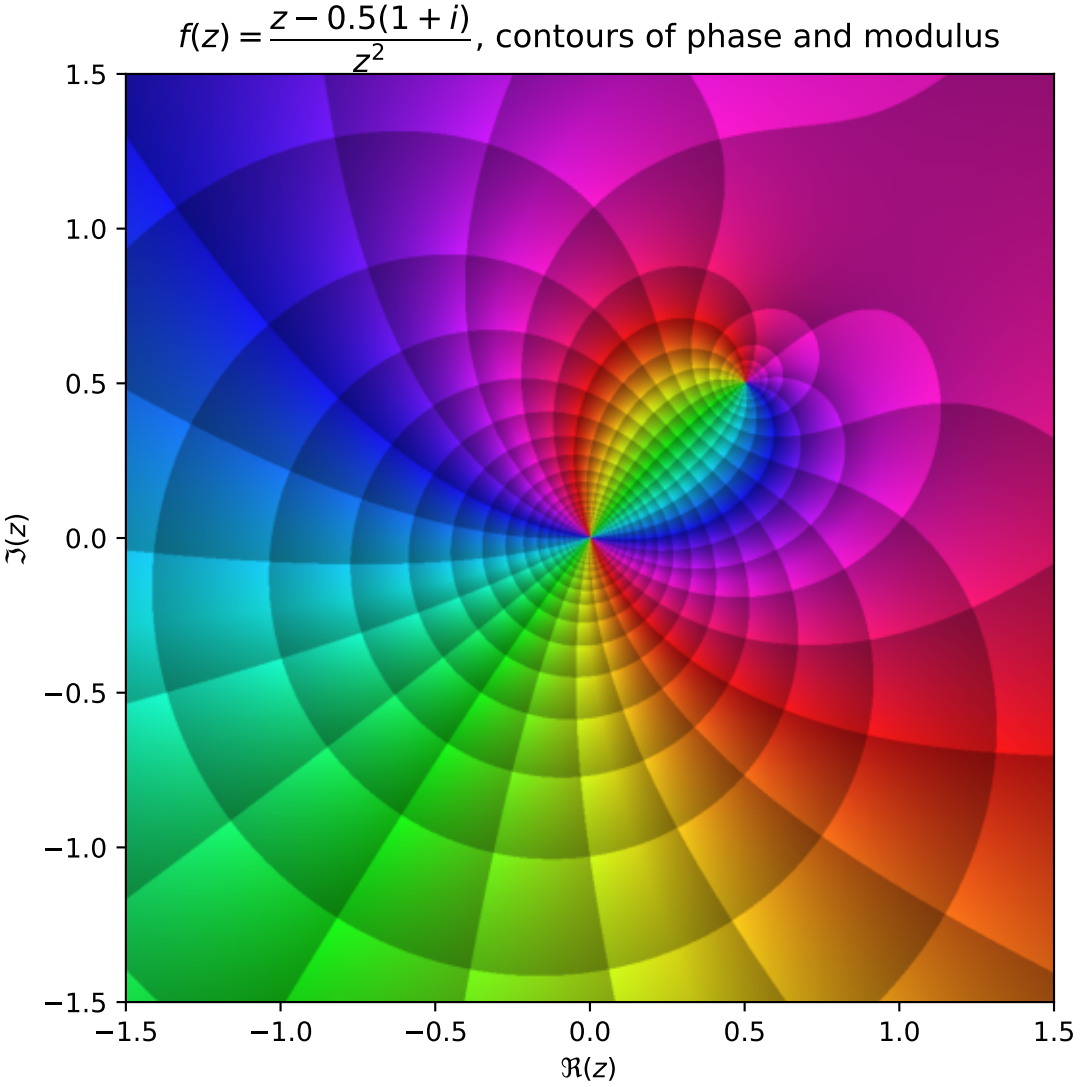

19.5.8 Domain coloring with contours of phase and modulus: $f(z) = \exp(1/z)$

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_DomainColoring.py, and the XML code in the file D01_DomainColoringRF1.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        DomainColoring(func=lambda z:np.exp(1/z), style='pm', re=[-2.0, 2.0],
            im=[-2.0, 2.0], Title=r'$f(z)=\exp(1/z)$', daxis=True)
```

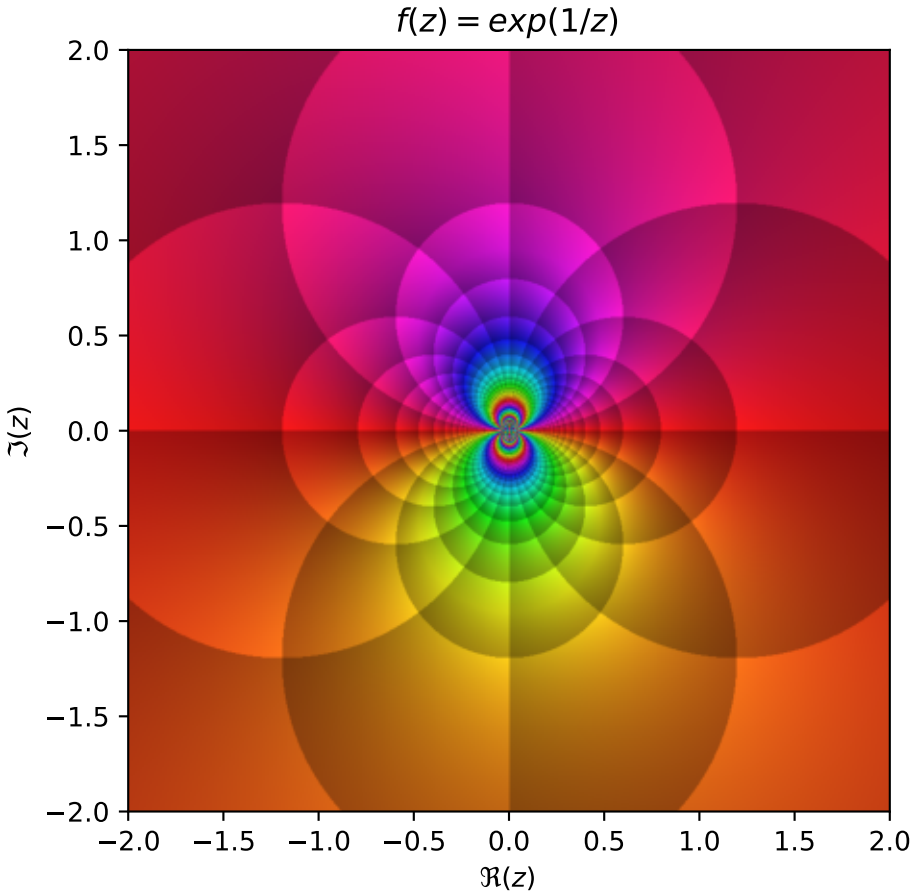

19.5.9 Domain coloring with contours of phase and modulus: $f(z) = z\exp(1/z)$

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_DomainColoring.py, and the XML code in the file D01_DomainColoringRF1.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        DomainColoring(func=lambda z:np.exp(1/z), style='pm', re=[-2.0, 2.0],
            im=[-2.0, 2.0], Title=r'$f(z)=\exp(1/z)$', daxis=True)
```

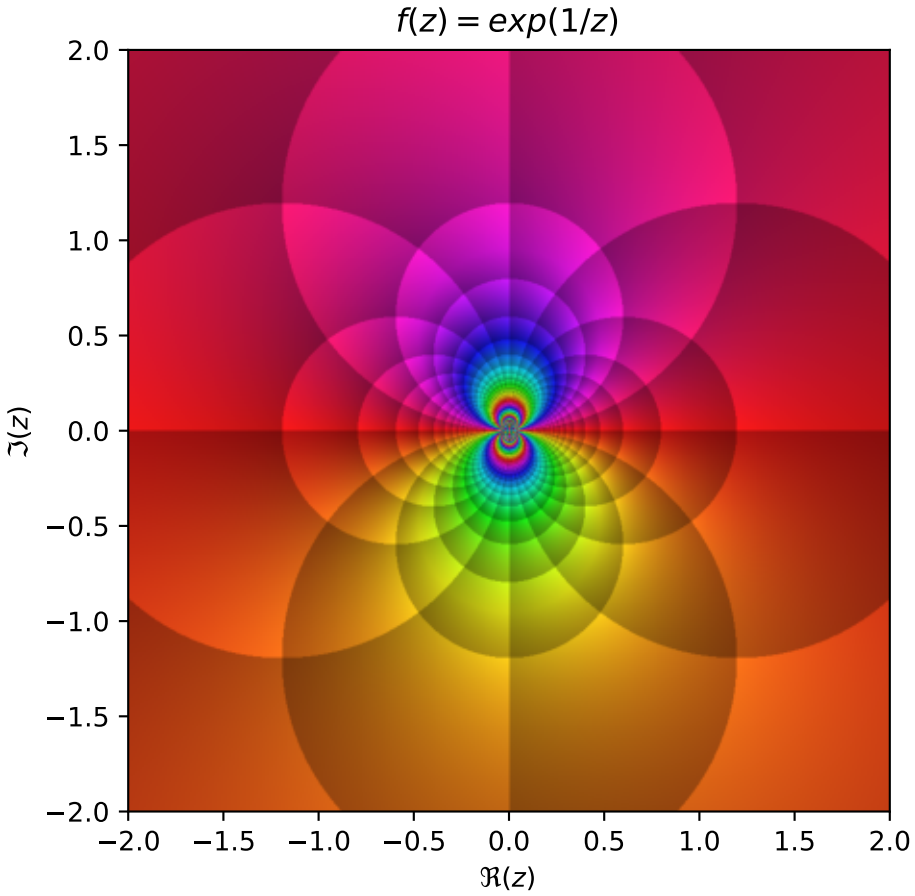

19.5.10 Domain coloring with contours of phase and modulus: $f(z) = \exp(1/z^2)$

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_DomainColoring.py, and the XML code in the file D01_DomainColoringRF1.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        DomainColoring(func=lambda z:np.exp(1.0 / z**2), style='pm', re=[-1.5, 1.5],
            im=[-1.5, 1.5], Title=r'$f(z)=\exp(1/z^2)$', daxis=True)
```

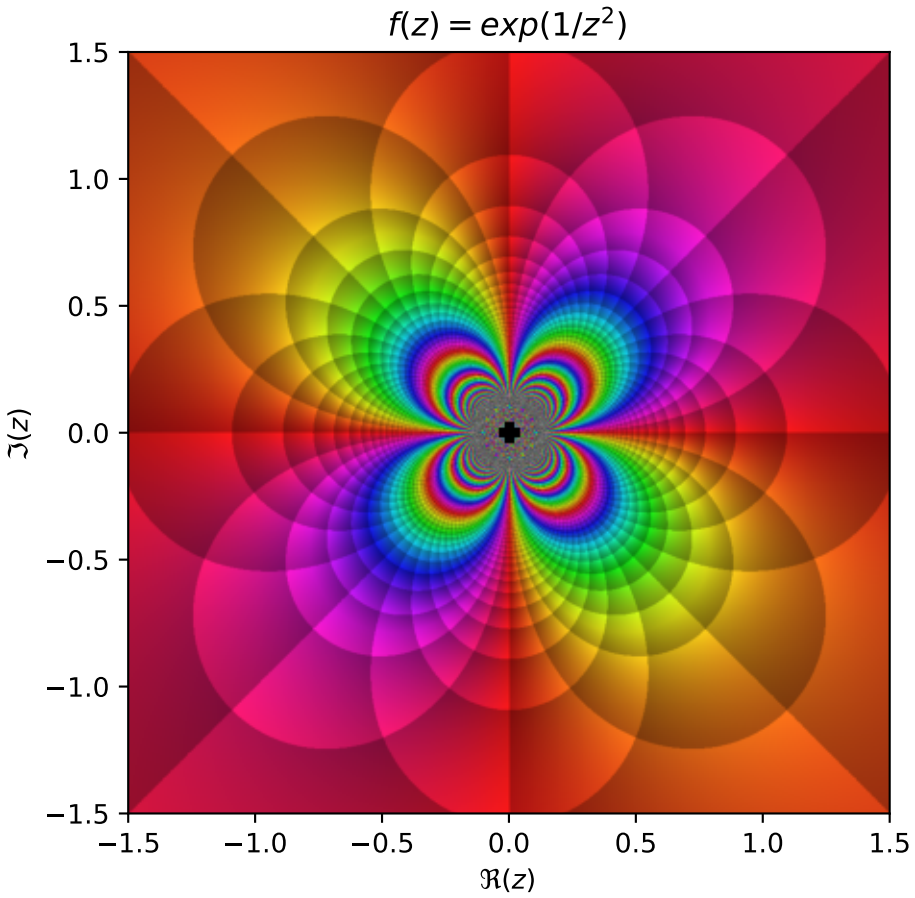

19.5.11 Domain coloring with contours of phase and modulus: $f(z) = \sin(z)$

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_DomainColoring.py, and the XML code in the file D01_DomainColoringRF1.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        DomainColoring(func=lambda z:np.sin(z), style='pm', re=[-np.pi, np.pi],
            im=[-2, 2], Title=r'$f(z)=\sin(z)$', daxis=True)
```

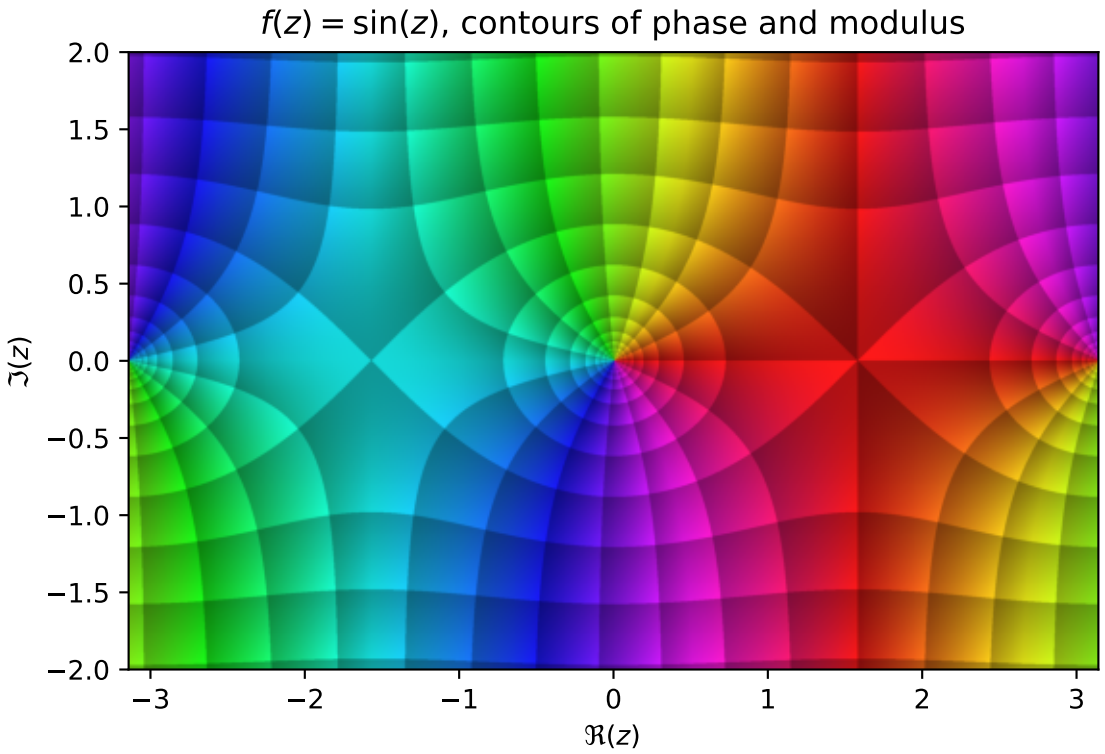

19.5.12 Domain coloring with contours of phase and modulus: $f(z) = z\sin(1/z)$

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_DomainColoring.py, and the XML code in the file D01_DomainColoringRF1.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        DomainColoring(func=lambda z:z*np.sin(1/z), style='pm', re=[-0.6, 0.6],
            im=[-0.6, 0.6], Title=r'$f(z)=z \cdot \sin(1/z)$', daxis=True)
```

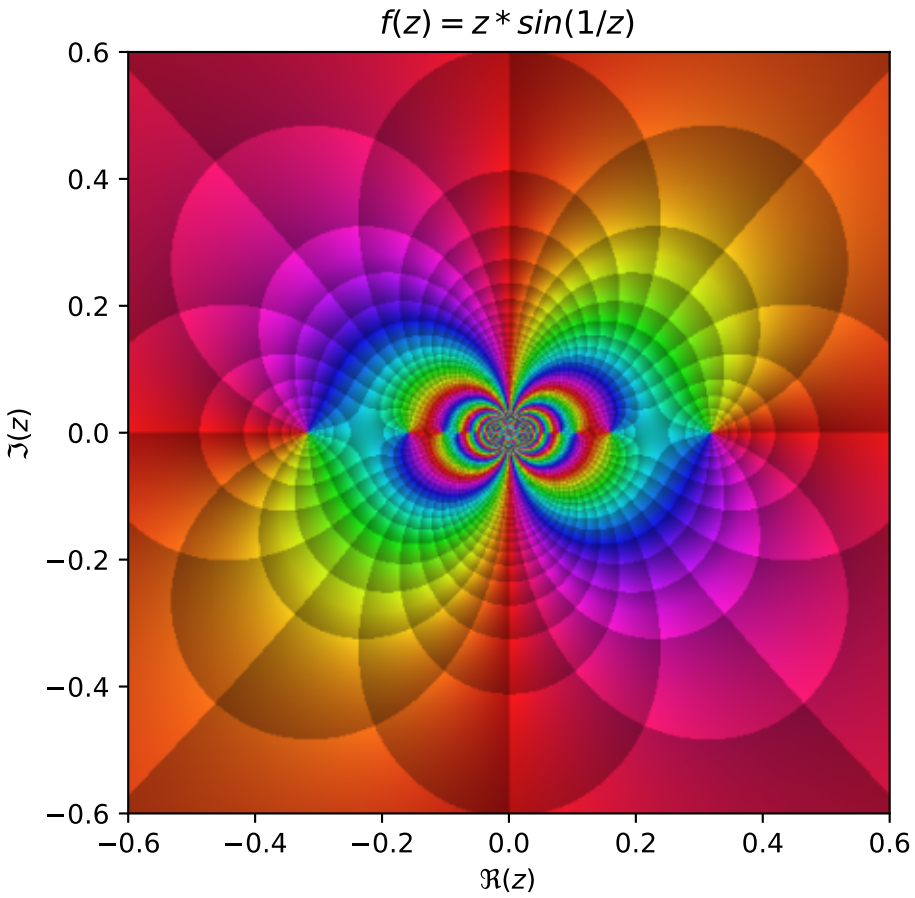

19.5.13 Domain coloring with contours of phase and modulus: $f(z) = \sin(z)/(z-i)^2$

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_DomainColoring.py, and the XML code in the file D01_DomainColoringRF1.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        DomainColoring(func=lambda z:np.sin(z) / (z-1j)**2, style='pm', re=[-3, 3],
            im=[-3, 3], Title=r'$f(z)=\dfrac{\sin(z)}{(z-i)^2}$', daxis=True)
```

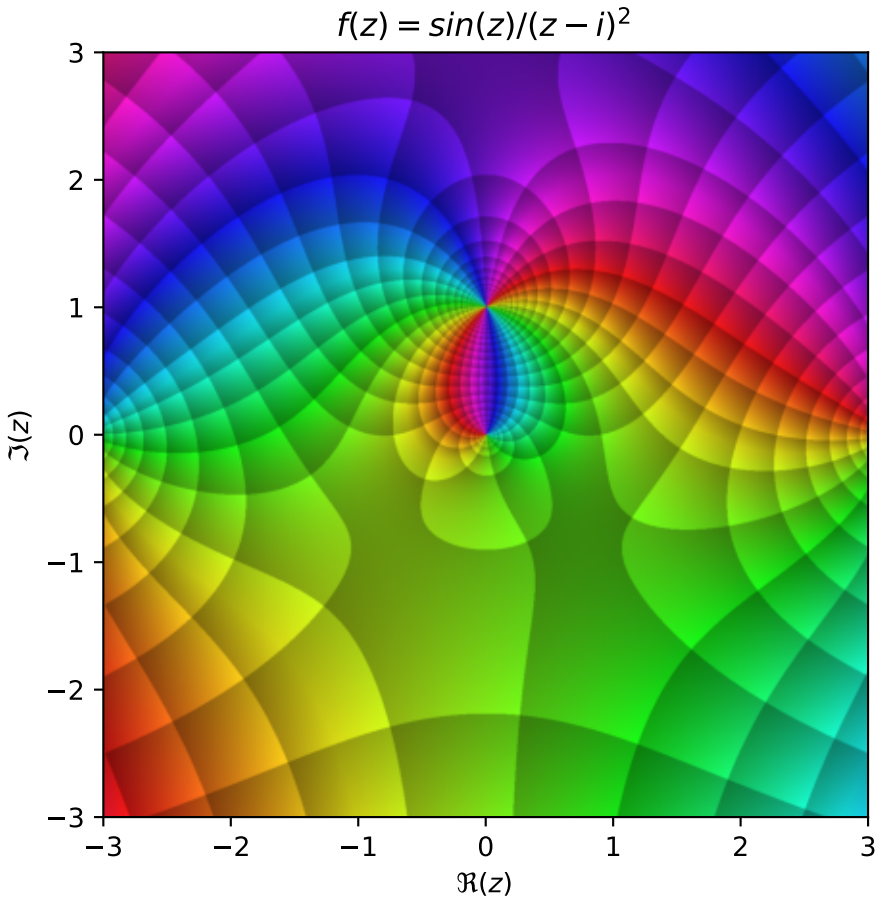

19.5.14 Domain coloring with contours of phase and modulus: $f(z) = \tan(z)$

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_DomainColoring.py, and the XML code in the file D01_DomainColoringRF1.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        DomainColoring(func=lambda z:np.tan(z), style='pm', re=[-np.pi, np.pi],
            im=[-2, 2], Title=r'$f(z)=\tan(z)$', daxis=True)
```

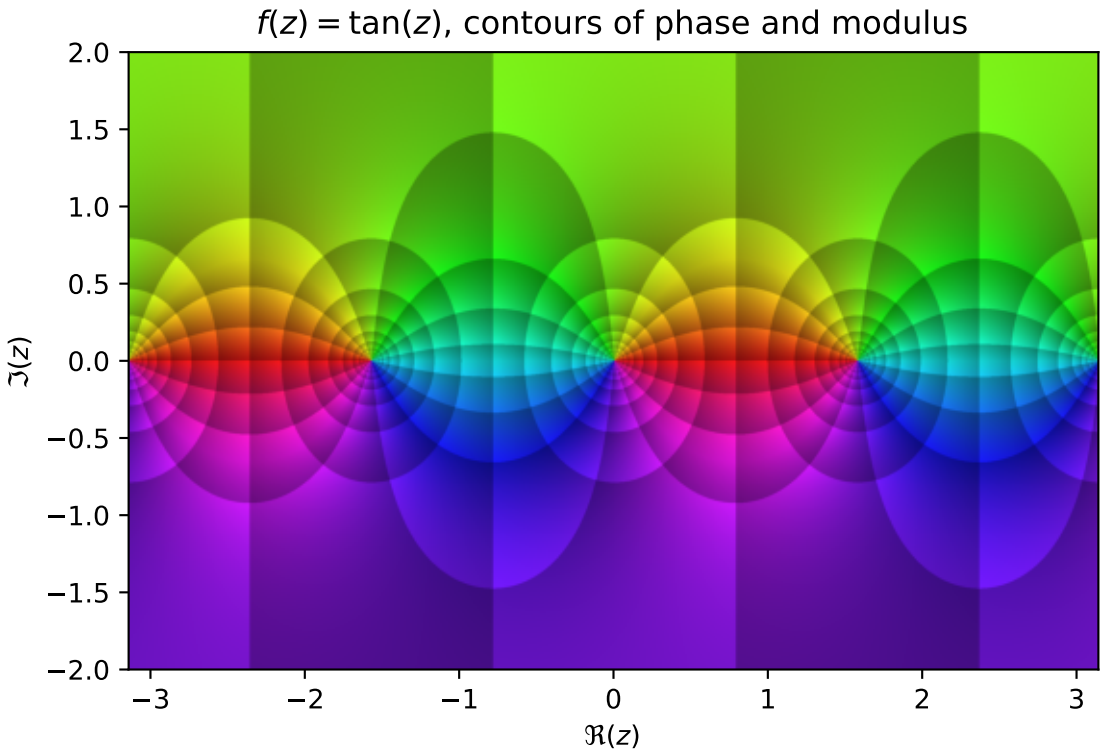

CHAPTER

TWENTY

MATPLOTLIB 3D GRAPHICS

20.1 Introduction

20.1.1 Overview

Matplotlib was initially designed with only two-dimensional plotting in mind. Around the time of the 1.0 release, some three-dimensional plotting utilities were built on top of Matplotlib's two-dimensional display, and the result is a convenient (if somewhat limited) set of tools for three-dimensional data visualization. Three-dimensional plots are enabled by importing the mplot3d toolkit, included with the main Matplotlib installation.

Once this submodule is imported, a three-dimensional axes can be created by passing the keyword projection='3d' to any of the normal axes creation routines.

With this three-dimensional axes enabled, we can now plot a variety of three-dimensional plot types. Three-dimensional plotting is one of the functionalities that benefits immensely from viewing figures interactively.

See also: https://matplotlib.org/stable/api/toolkits/mplot3d/faq.html

mplot3d was intended to allow users to create simple 3D graphs with the same "look-and-feel" as matplotlib's 2D plots. Furthermore, users can use the same toolkit that they are already familiar with to generate both their 2D and 3D plots.

20.2 Matplotlib: 3D Graphics (from Matplotlib tutorials)

See Test2DFunctions

20.2.1 Klein bottle

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_KleinBottle.py, and the XML code in the file D01_DomainColoringRF1.2D.xml.

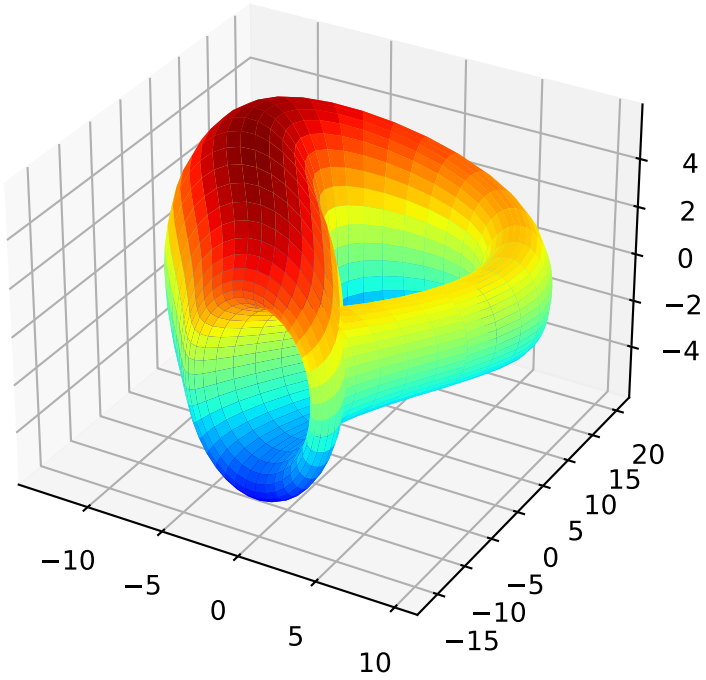

20.2.2 Lorentz attractor

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02_LorenzAttractor.py, and the XML code in the file D02_LorenzAttractor.2D.xml.

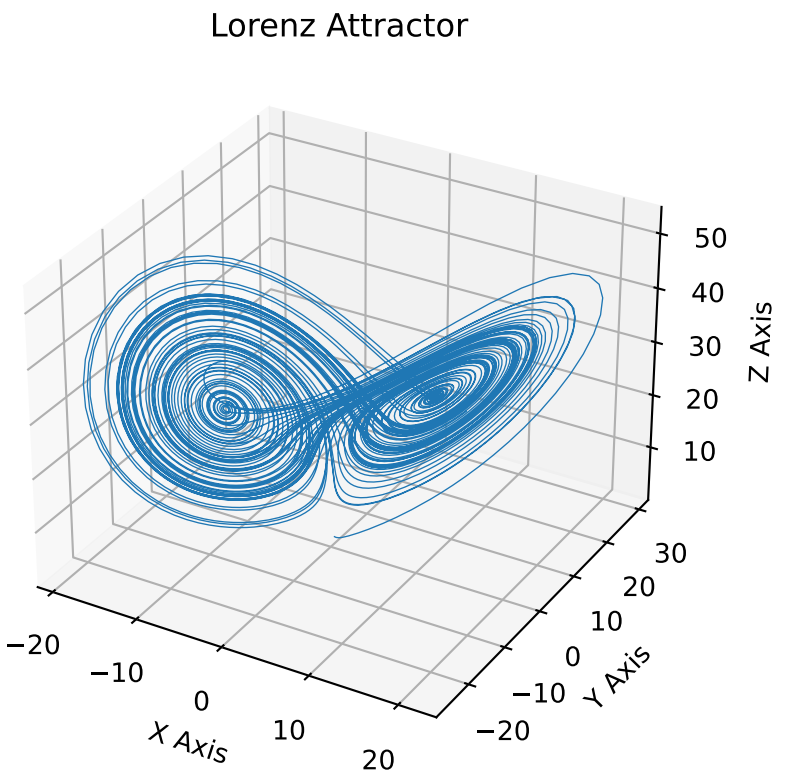

20.2.3 Parametric curve

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03_ParametricCurve.py, and the XML code in the file D03_ParametricCurve.2D.xml.

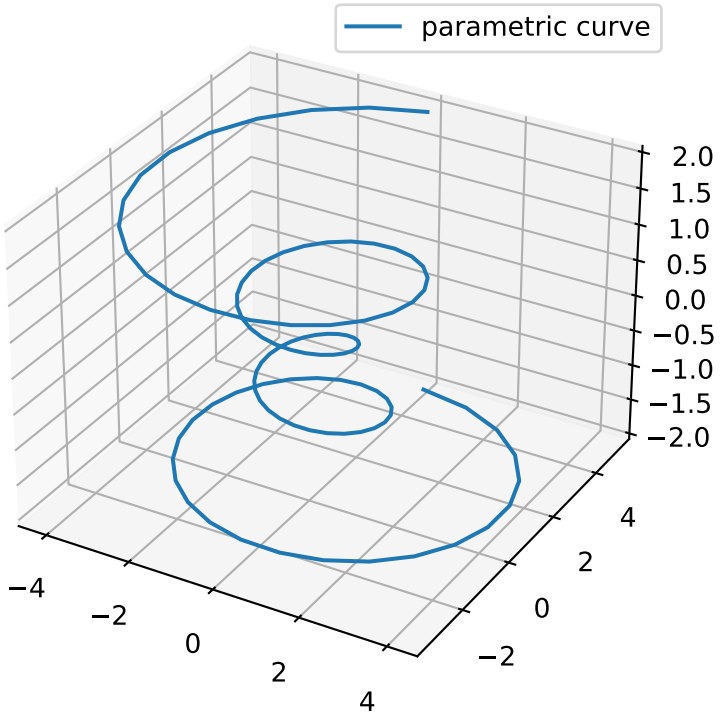

20.2.4 Projected filled contour

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04_ProjectFilledContour.py, and the XML code in the file D04_ProjectFilledContour.2D.xml.

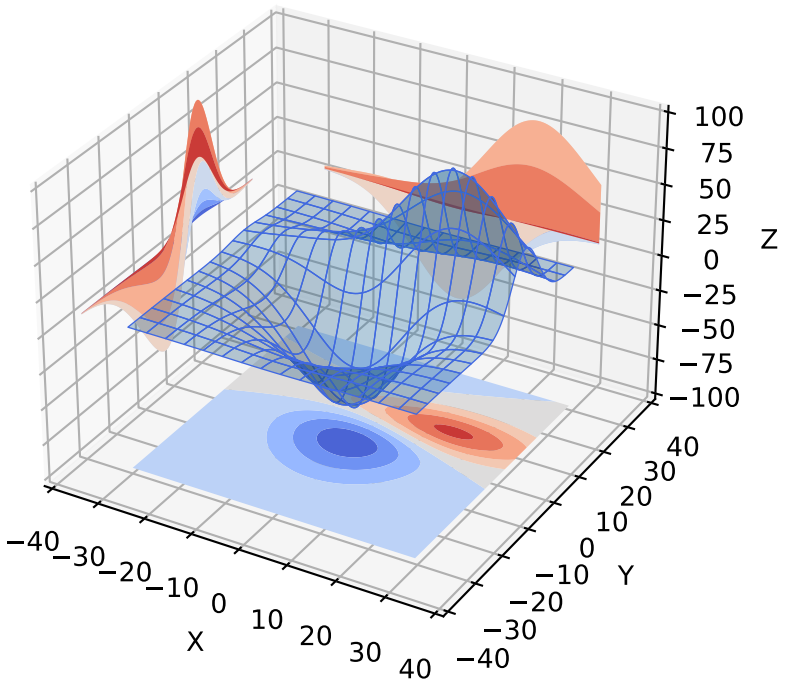

20.2.5 Projected open contour

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05_ProjectOpenContour.py, and the XML code in the file D05_ProjectOpenContour.2D.xml.

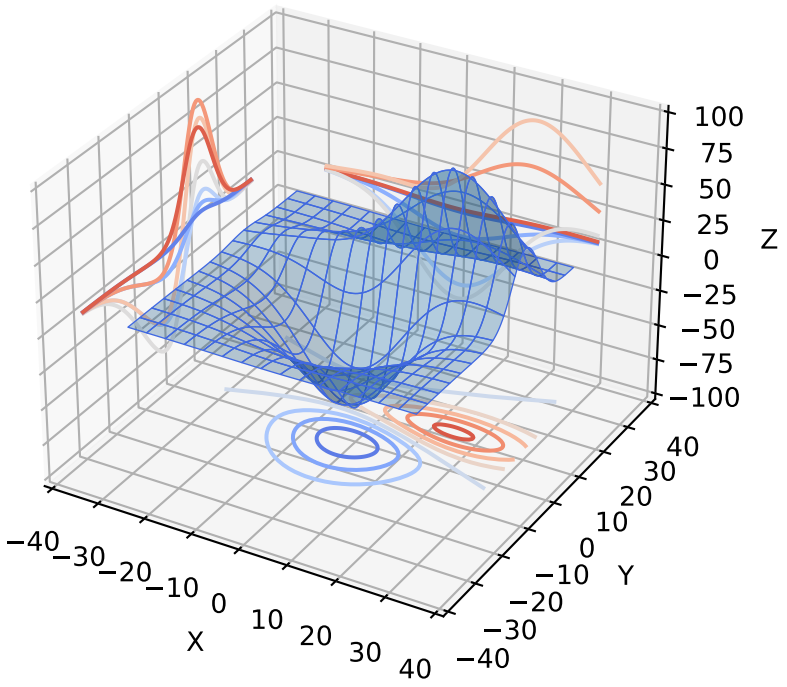

20.2.6 Scatterplot

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06_Scatterplot3D.py, and the XML code in the file D06_Scatterplot3D.2D.xml.

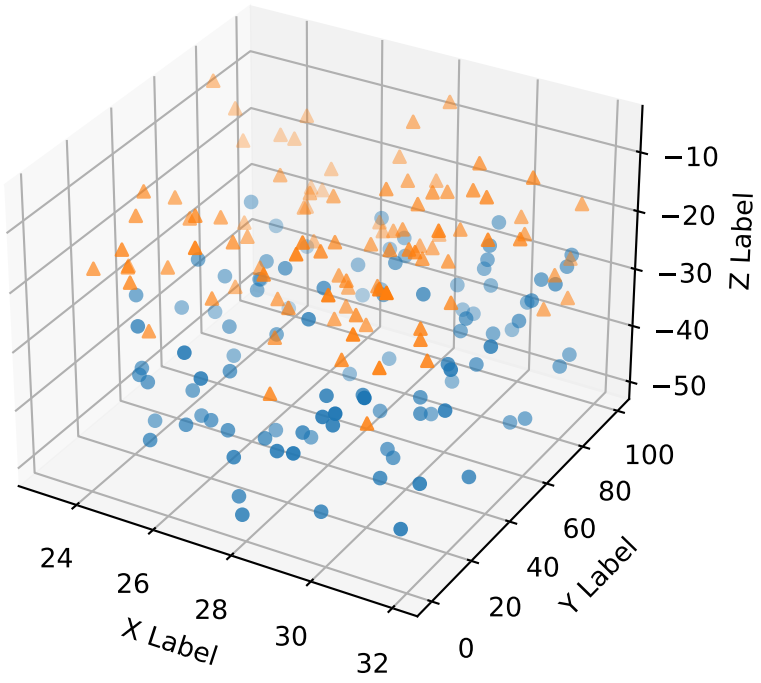

20.2.7 Surface colormap

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07_SurfaceColormap.py, and the XML code in the file D07_SurfaceColormap.2D.xml.

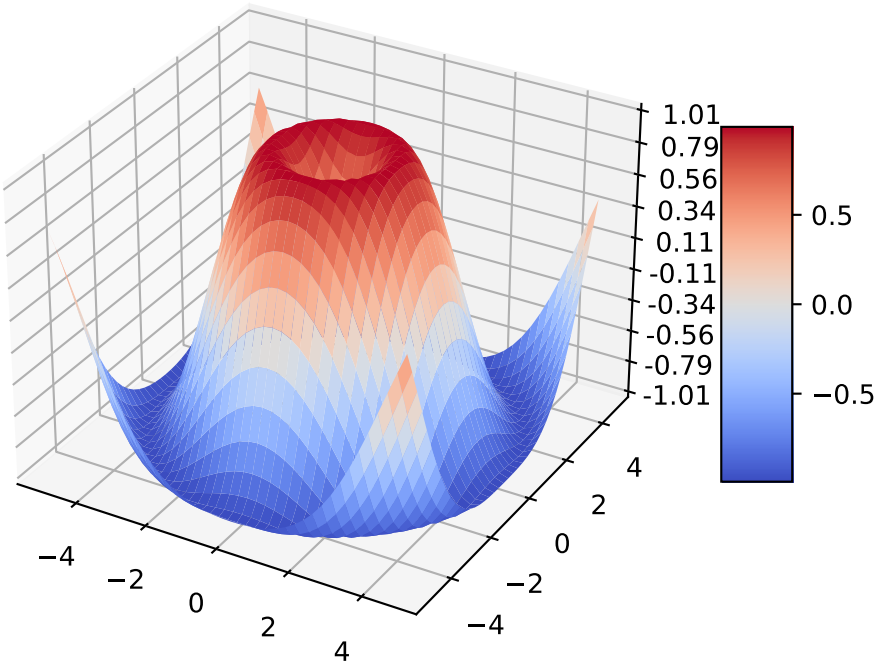

20.2.8 Surface hillshading

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D08_SurfaceHillshading.py, and the XML code in the file D08_SurfaceHillshading.2D.xml.

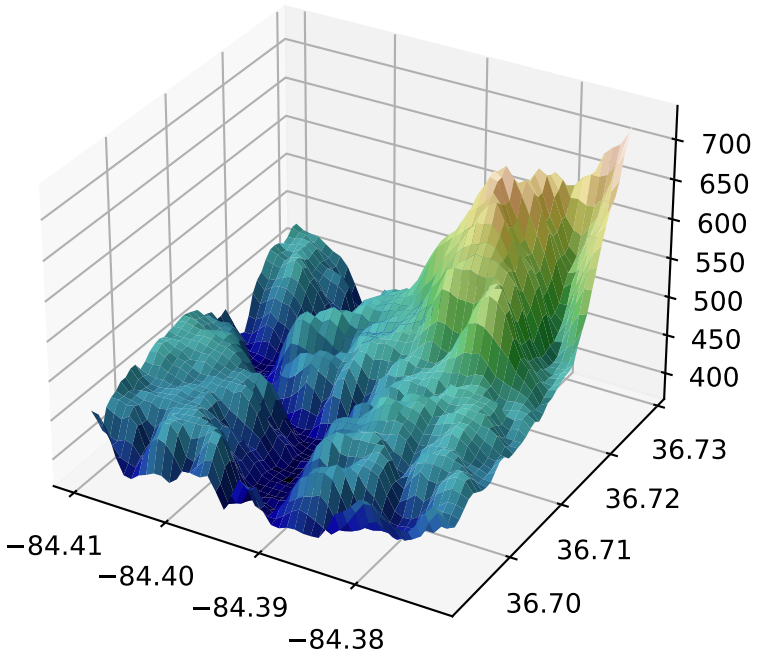

20.2.9 Surface solid

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D09_SurfaceSolid.py, and the XML code in the file D09_SurfaceSolid.2D.xml.

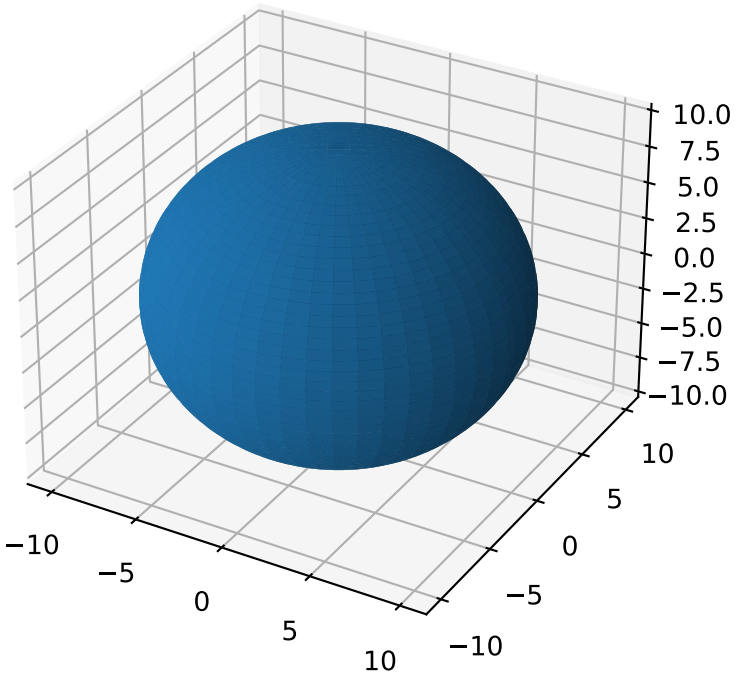

20.2.10 Surface triangular

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D10_SurfaceTriangular.py, and the XML code in the file D10_SurfaceTriangular.2D.xml.

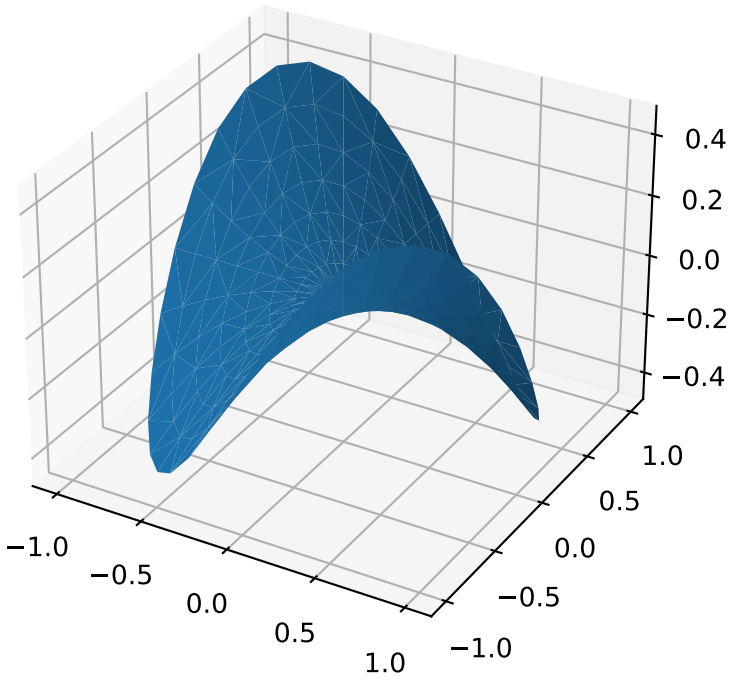

20.3 S3dlib: Basic geometric figures

20.3.1 Base 3D class surface

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_Base3DClassSurface.py, and the XML code in the file D01_Base3DClassSurface.2D.xml.

See: https://s3dlib.org/examples/functional/cube.html

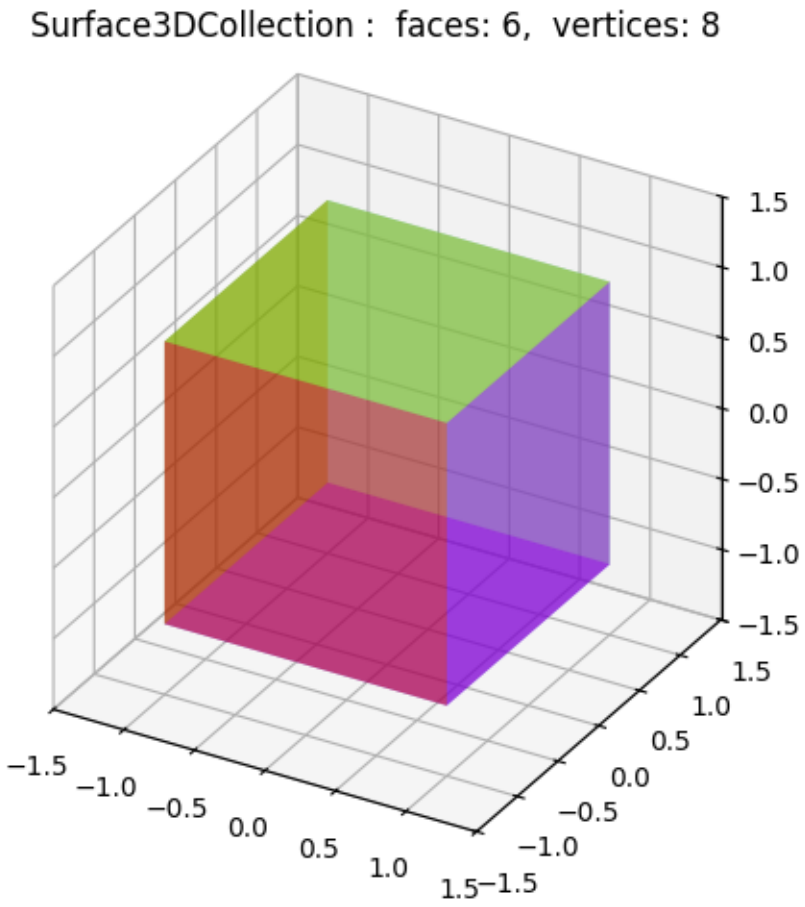

20.3.2 Hypercube

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02_Hypercube.py, and the XML code in the file D02_Hypercube.2D.xml.

See: https://s3dlib.org/examples/functional/hypercube.html

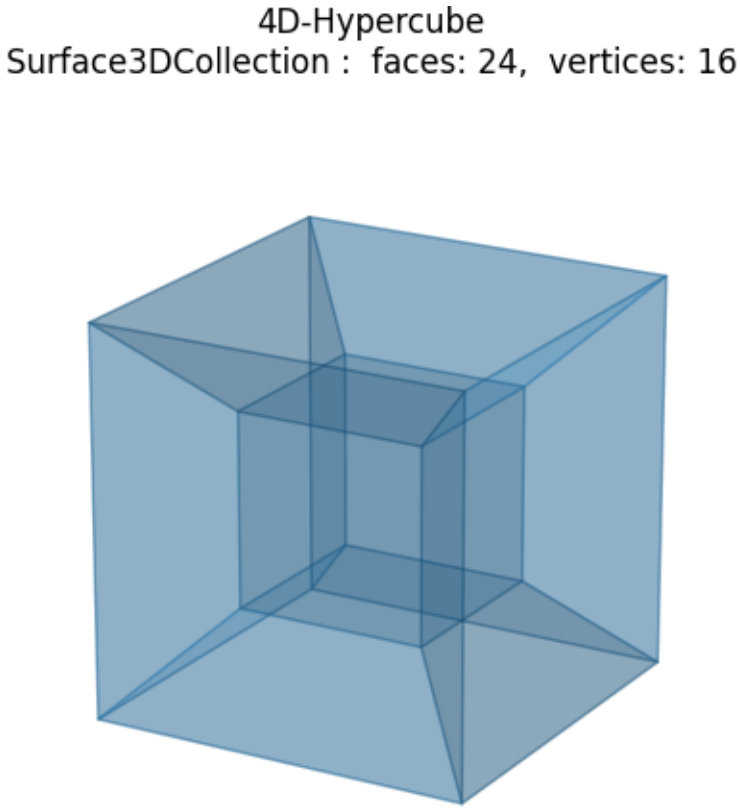

20.3.3 Surface elements

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03_SurfaceElements.py, and the XML code in the file D03_SurfaceElements.2D.xml.

See: https://s3dlib.org/examples/functional/fev_fn_vn.html

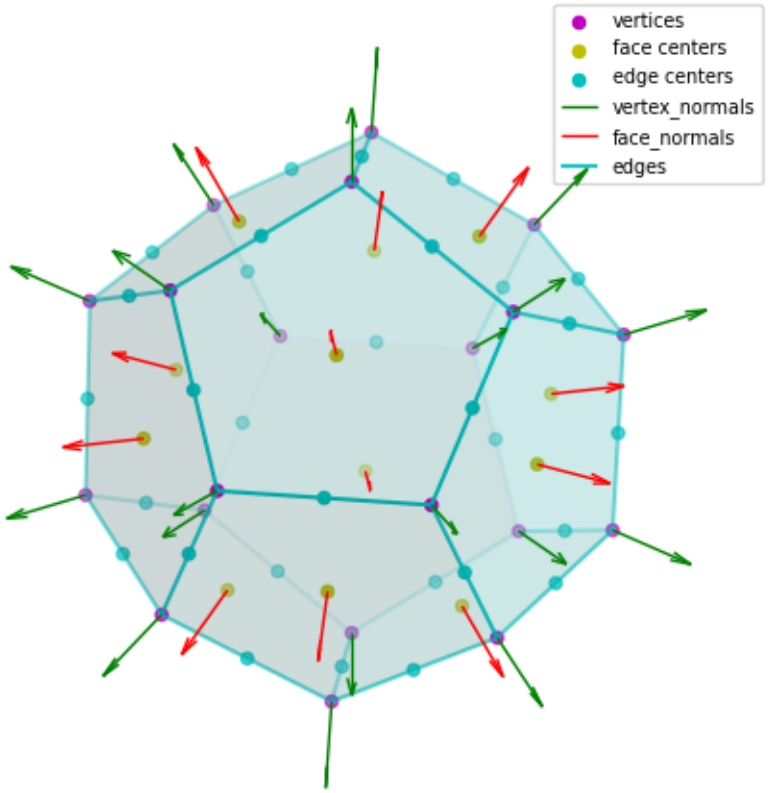

SphericalSurface (0 , dodeca*): faces: 12, vertices: 20

20.3.4 Hyperboloid 3D

See also: https://mathworld.wolfram.com/One-SheetedHyperboloid.html

See also: https://en.wikipedia.org/wiki/Hyperboloid

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04_Hyperboloid3D.py, and the XML code in the file D04_Hyperboloid3D.2D.xml .

See: https://github.com/fzaverl/s3dlib

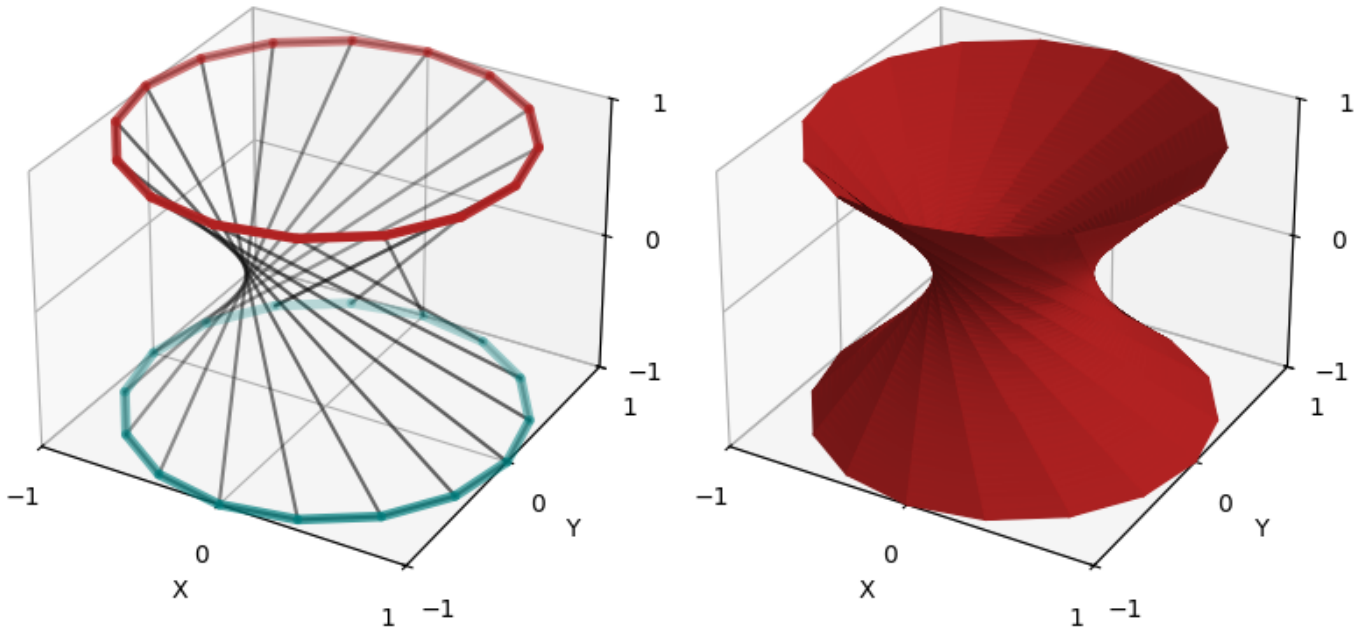

20.3.5 Conic sections

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05_Conic_Sections.py, and the XML code in the file D05_Conic_Sections.2D.xml.

See: https://s3dlib.org/examples/lines/conic.html

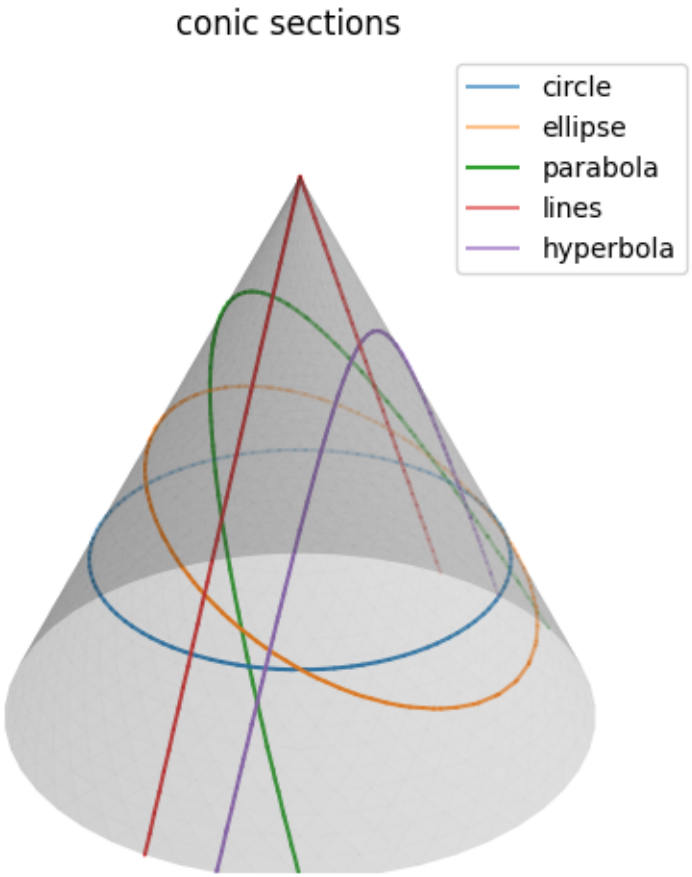

20.3.6 Base 3D class surface, part 2

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06_Base3DClassSurface2.py, and the XML code in the file D06_Base3DClassSurface2.2D.xml.

See: https://s3dlib.org/examples/functional/base_surface.html

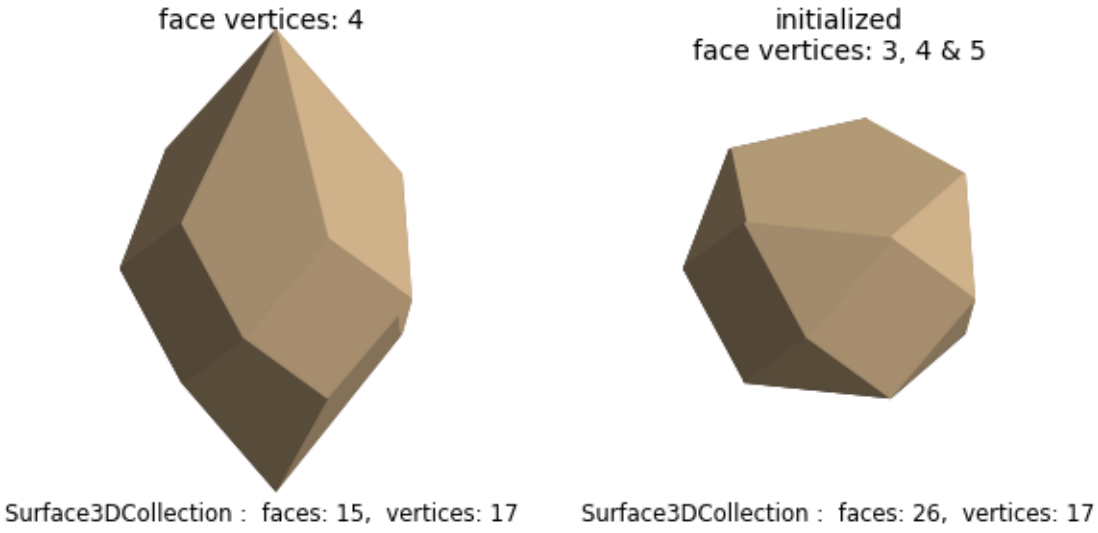

20.3.7 Rhombicuboctahedron

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07a_RhombicuboctahedronPlain.py, and the XML code in the file D07a_RhombicuboctahedronPlain.2D.xml.

See: https://s3dlib.org/examples/functional/arch_solid.html

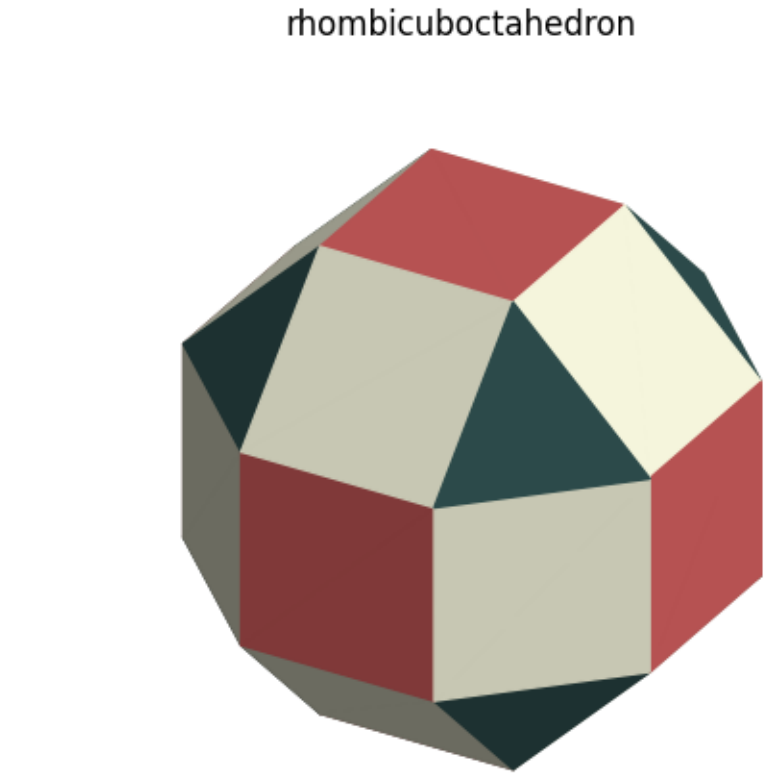

Surface3DCollection : faces: 44, vertices: 24

20.3.8 Rhombicuboctahedron, bubbles

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07b_RhombicuboctahedronBubbles.py, and the XML code in the file D07b_RhombicuboctahedronBubbles.2D.xml.

See: https://s3dlib.org/examples/functional/arch_solid.html

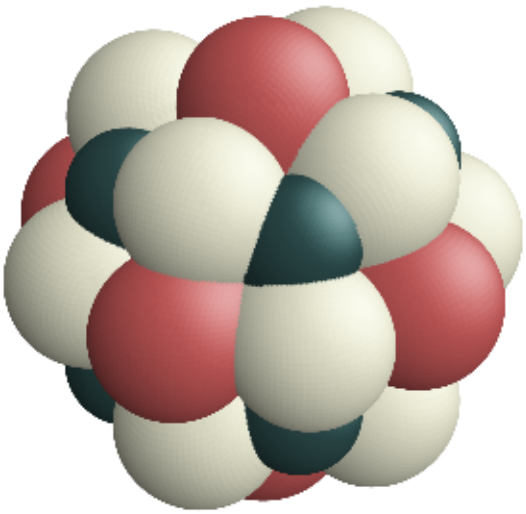

```
Surface3DCollection :  faces: 45056,  vertices: 22530
```

20.4 S3dlib: Real functions

20.4.1 Surface plot of a real function, basic example

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_HelloWorldExample.py, and the XML code in the file D01_HelloWorldExample.2D.xml.

See: https://s3dlib.org/examples/functional/hw_example.html

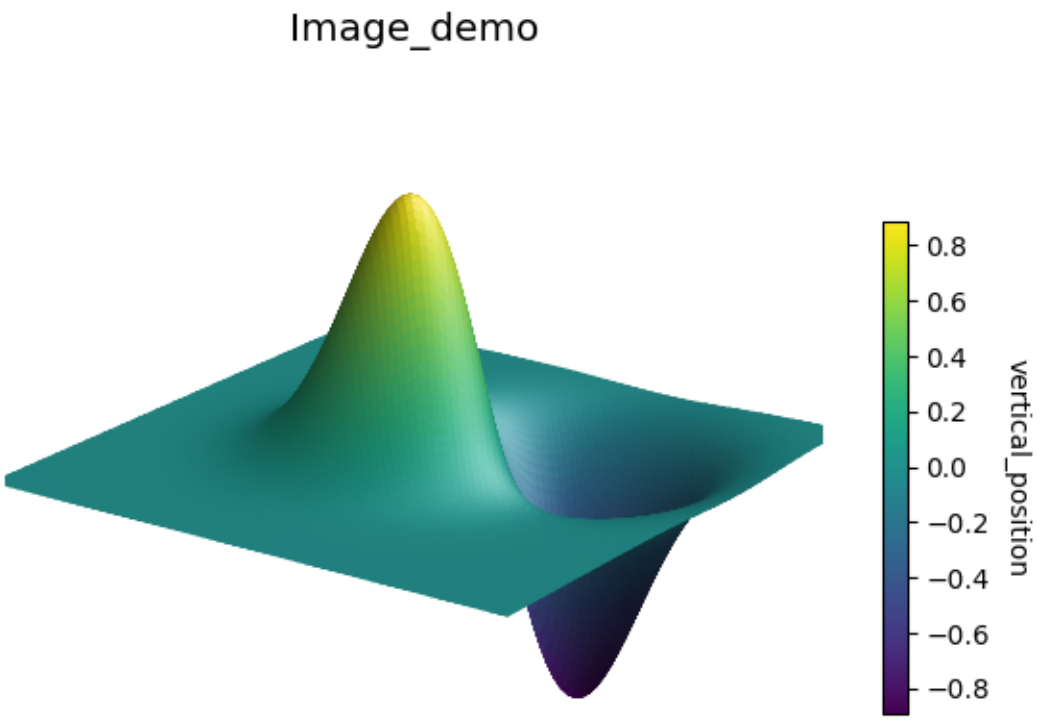

PlanarSurface (6 , quad): faces: 16384, vertices: 8321

20.4.2 Surface plot of a real function, grid

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02_HelloWorldExampleGrid.py, and the XML code in the file D02_HelloWorldExampleGrid.2D.xml.

See: https://s3dlib.org/examples/functional/hw_example_grid.html

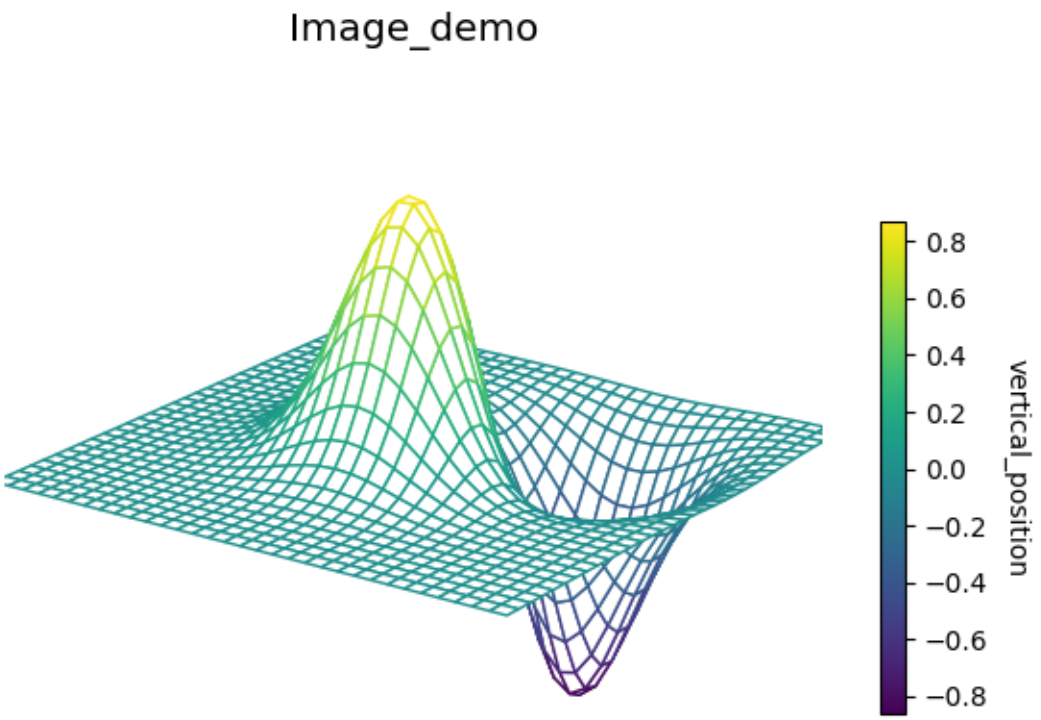

PlanarSurface (4 , squ): faces: 1024, vertices: 1089

20.4.3 Surface plot of a real function, peaks example

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03_HelloWorldExample2b.py, and the XML code in the file D03_HelloWorldExample2b.2D.xml.

See: https://s3dlib.org/examples/functional/swirl.html

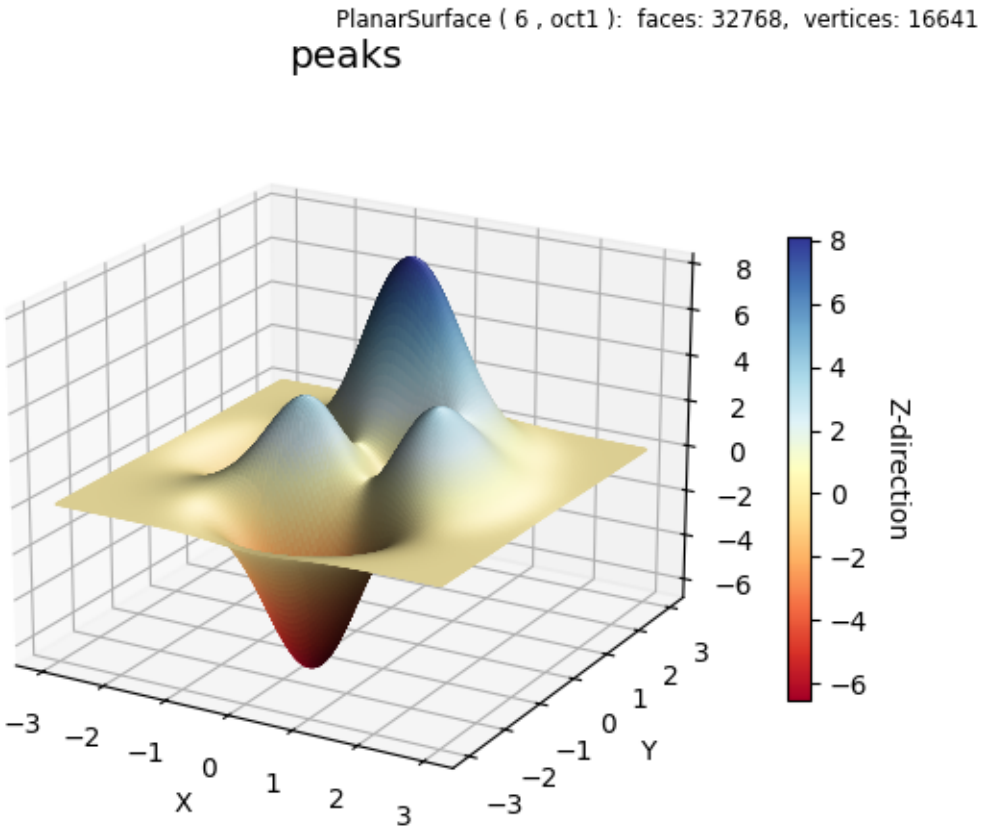

20.4.4 Function plots: Ackley, Himmelblau, Rosenbrock, Rastrigin

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04_FunctionPlots.py, and the XML code in the file D04_FunctionPlots.2D.xml.

See: https://s3dlib.org/examples/functional/funcplots.html

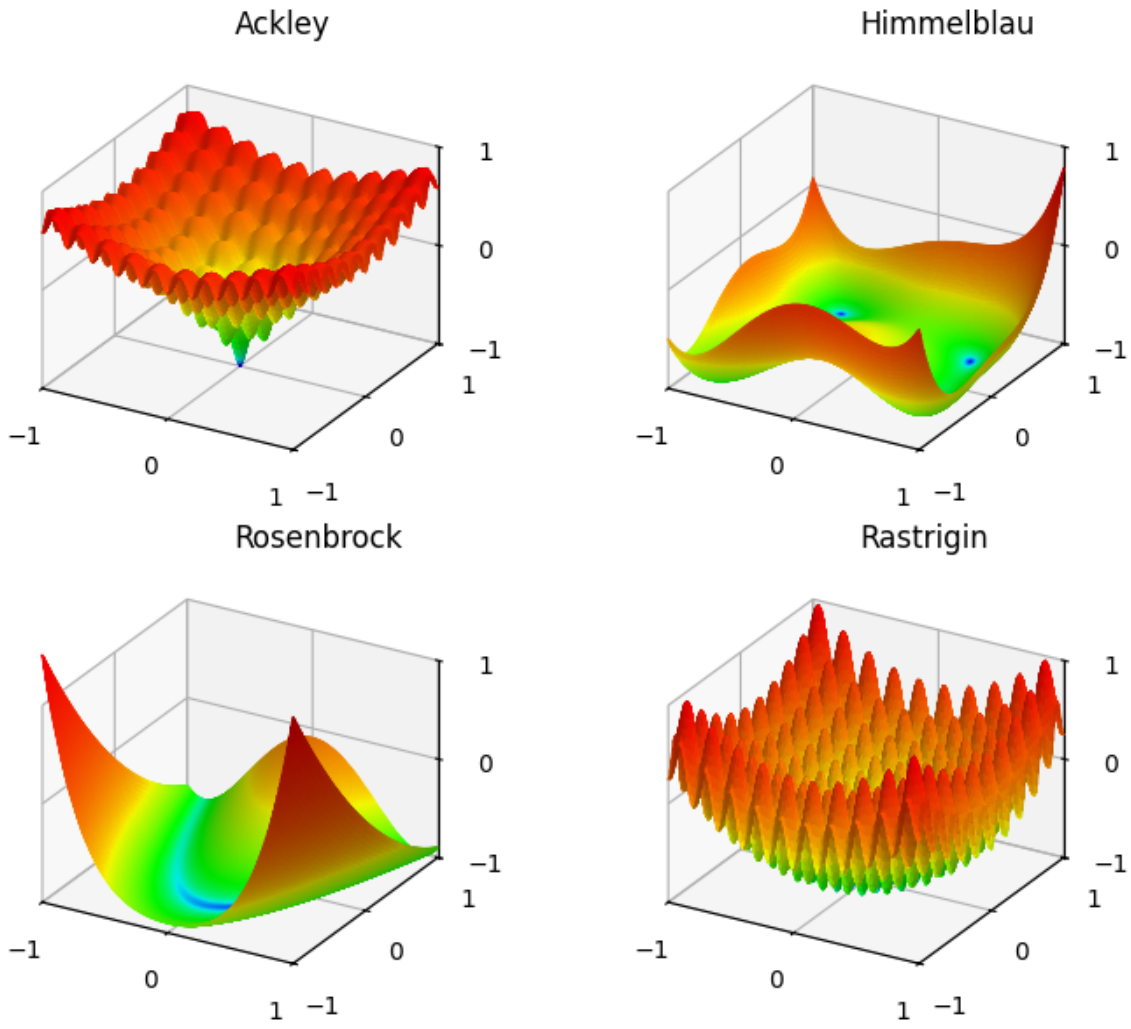

20.4.5 McCormick function

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05_FunctionPlots2.py, and the XML code in the file D05_FunctionPlots2.2D.xml.

See: https://s3dlib.org/examples/functional/domain.html

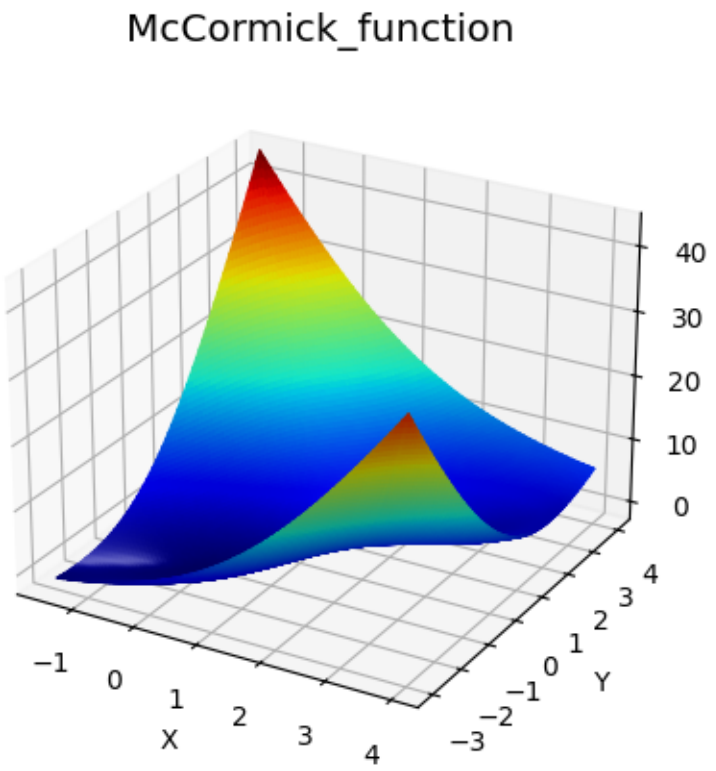

20.4.6 Surface plot combined with contour

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06_SurfaceContours.py, and the XML code in the file D06_SurfaceContours.2D.xml.

See: https://github.com/fzaverl/s3dlib

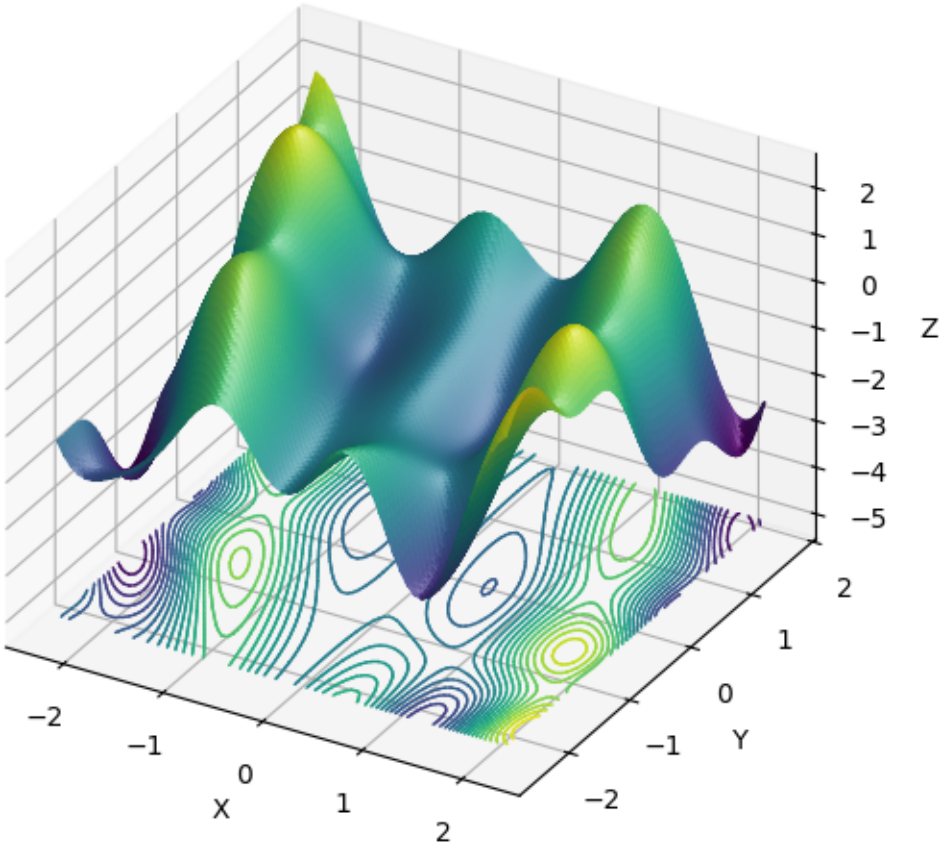

20.4.7 Sliced polar surface

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07_SlicedPolarSurface.py, and the XML code in the file D07_SlicedPolarSurface.2D.xml.

See: https://s3dlib.org/examples/functional/screw.html

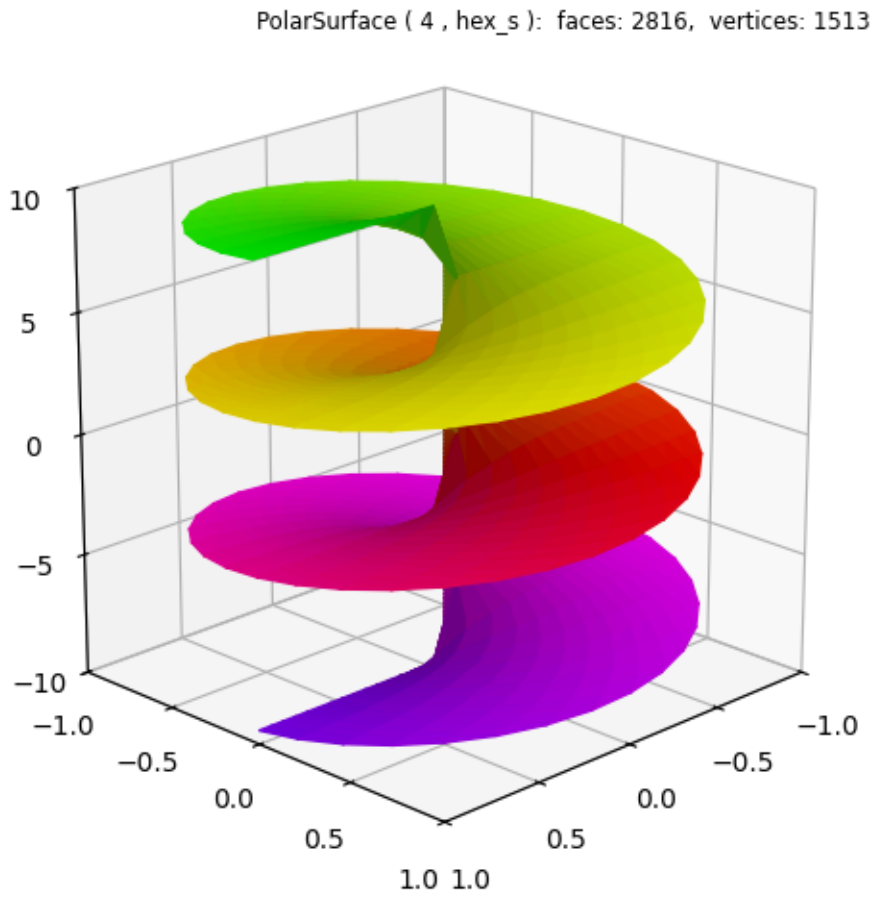

20.5 S3dlib: Parametric Surfaces

See Test2DFunctions

20.5.1 Color representation vs geometric representation, part 1

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_TwoMethodsA.py, and the XML code in the file D01_TwoMethodsA.2D.xml.

See: https://s3dlib.org/examples/functional/sph_harm.html

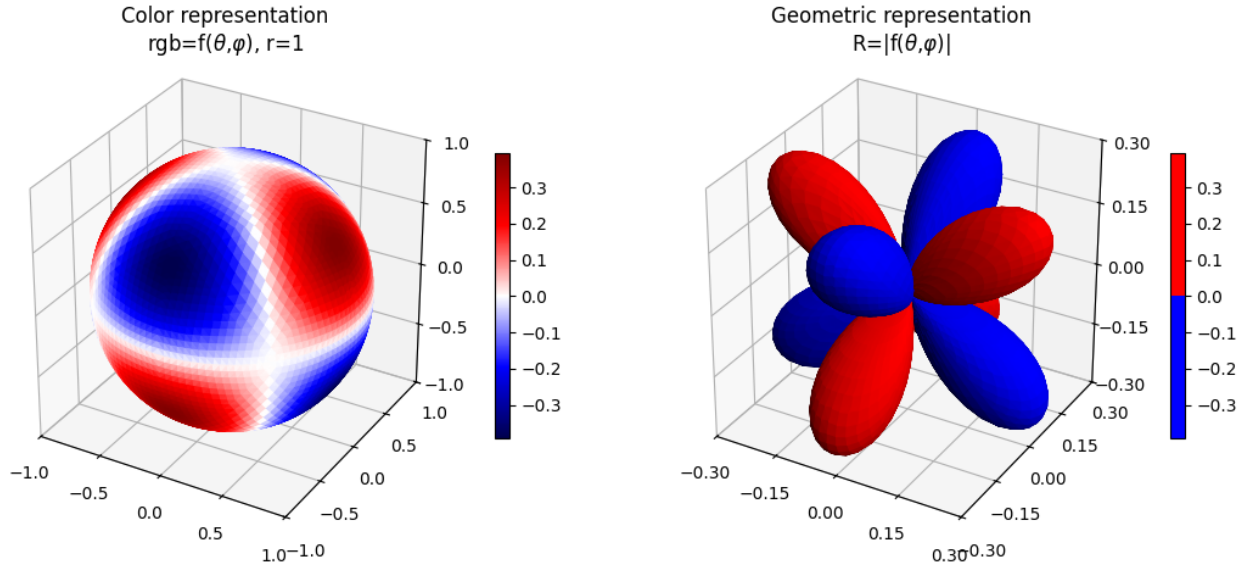

20.5.2 Color representation vs geometric representation, part 2

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02_TwoMethodsB.py, and the XML code in the file D02_TwoMethodsB.2D.xml.

See: https://s3dlib.org/examples/functional/sph_harm.html

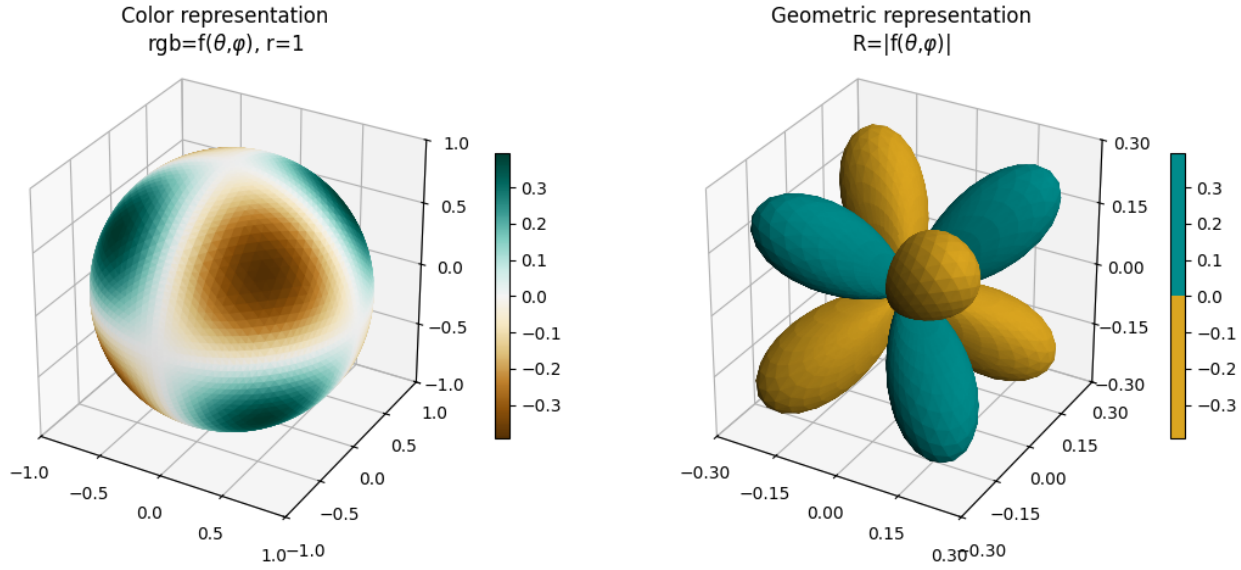

20.5.3 Color maps: Möbius function example

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03_Colormaps.py, and the XML code in the file D03_Colormaps.2D.xml.

See: https://github.com/fzaverl/s3dlib

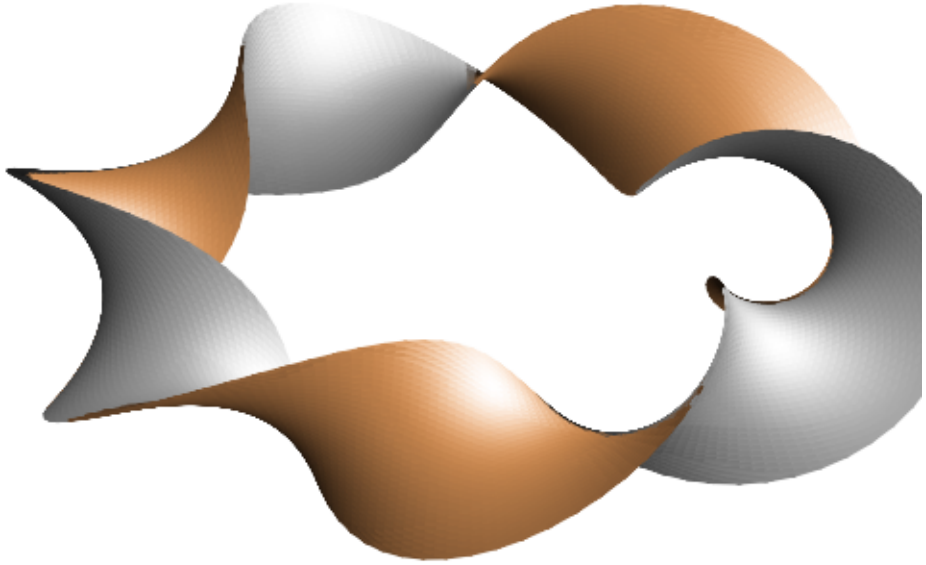

20.5.4 Shading: Möbius function example

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04_TwistSet.py, and the XML code in the file D04_TwistSet.2D.xml.

See: https://github.com/fzaverl/s3dlib

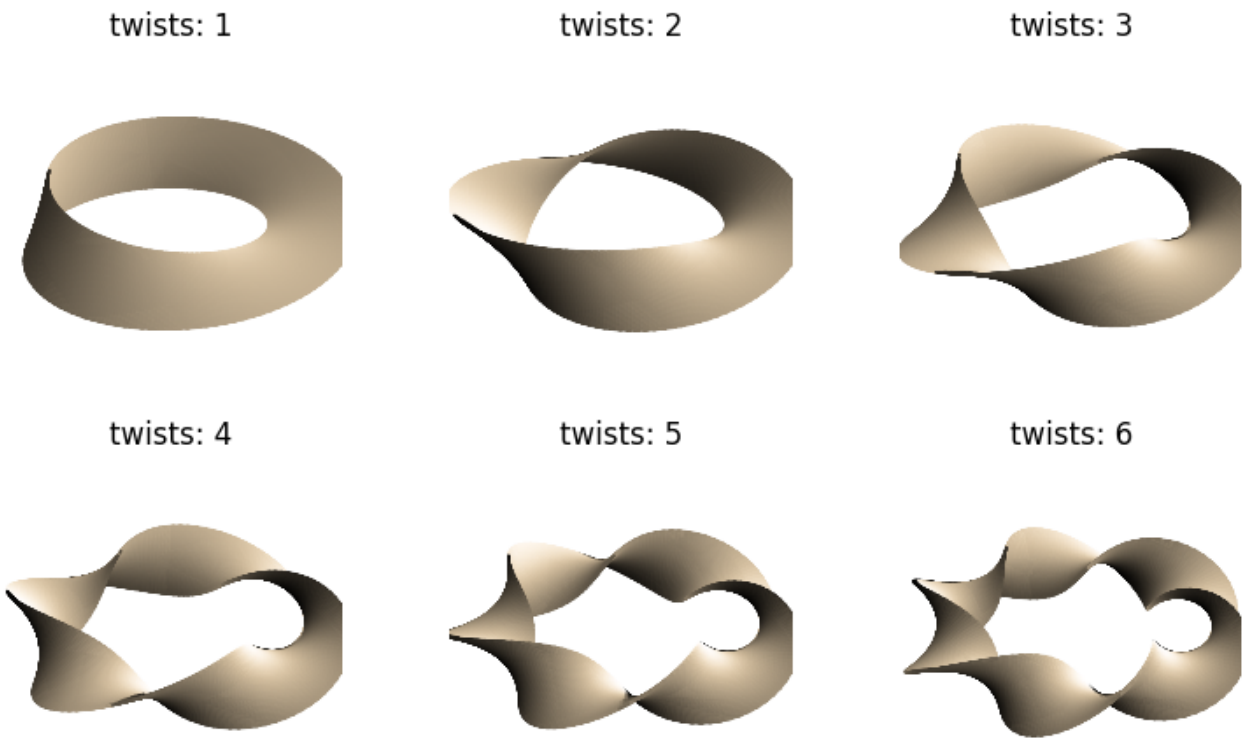

20.5.5 Color maps: Boy, Dini, Bour, Roman, Klein, and Figure8 examples

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05_Colormaps2.py, and the XML code in the file D05_Colormaps2.2D.xml.

See: https://github.com/fzaverl/s3dlib

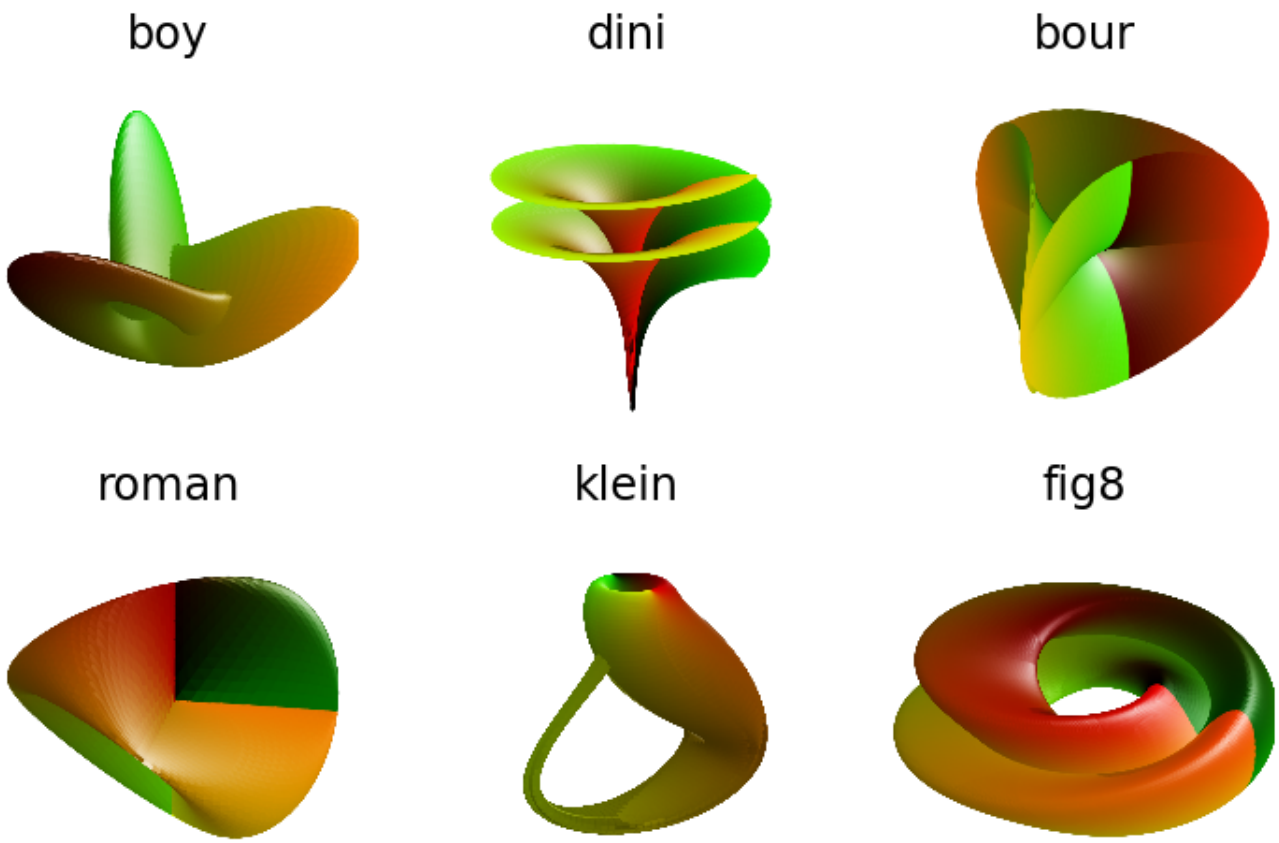

20.5.6 Colored knot in 3D

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06_Knot.py, and the XML code in the file D06_Knot.2D.xml.

See: https://github.com/fzaverl/s3dlib

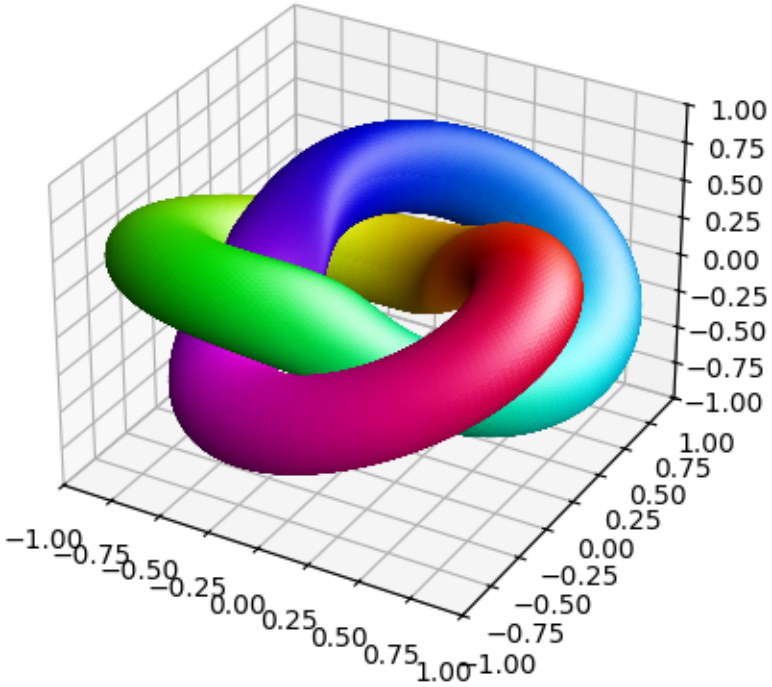

20.5.7 Multiple geometric maps

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07_MultipleGeometricMaps.py, and the XML code in the file D07_MultipleGeometricMaps.2D.xml.

See: https://s3dlib.org/examples/functional/knot.html

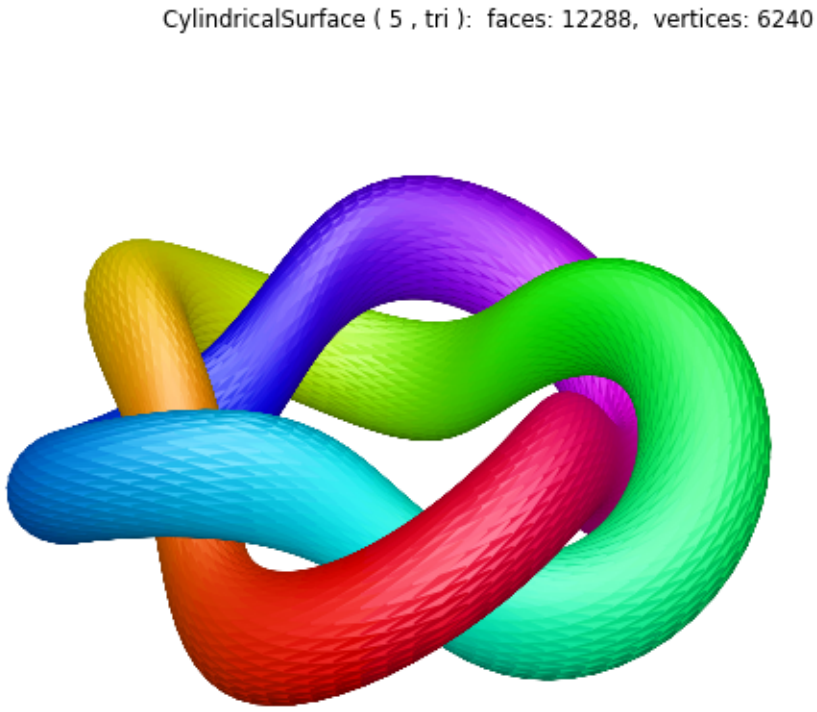

20.5.8 Example from Mayavi

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D08_Mayavi.py, and the XML code in the file D08_Mayavi.2D.xml.

See: https://s3dlib.org/examples/functional/a_demo.html

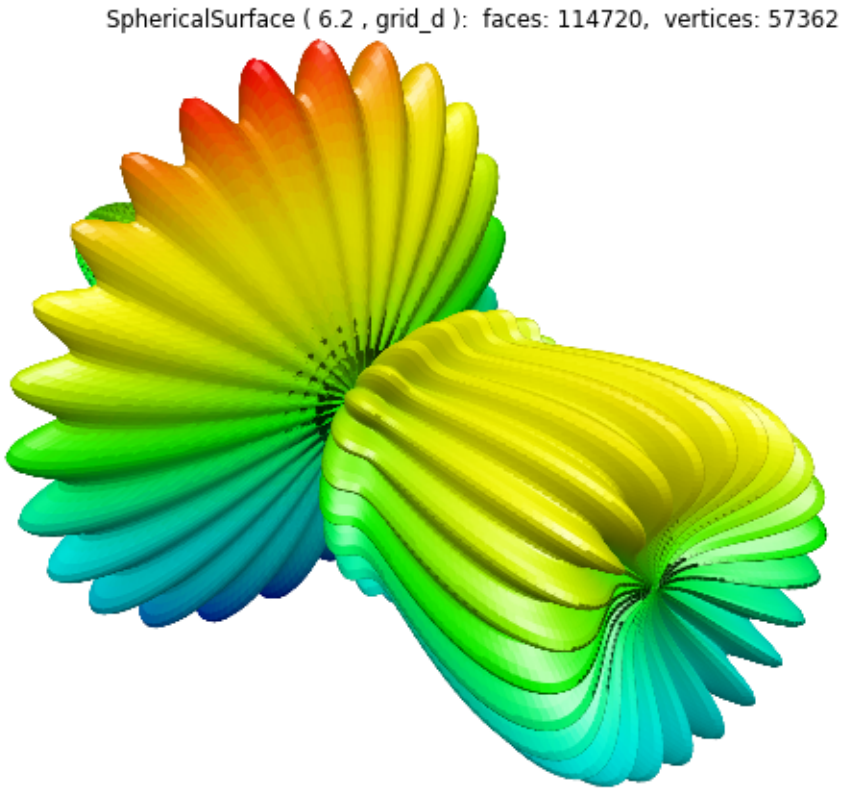

20.5.9 S3Dlib Logo

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D09_S3dlibLogo.py, and the XML code in the file D09_S3dlibLogo.2D.xml.

See: https://s3dlib.org/examples/functional/s3d_sph.html

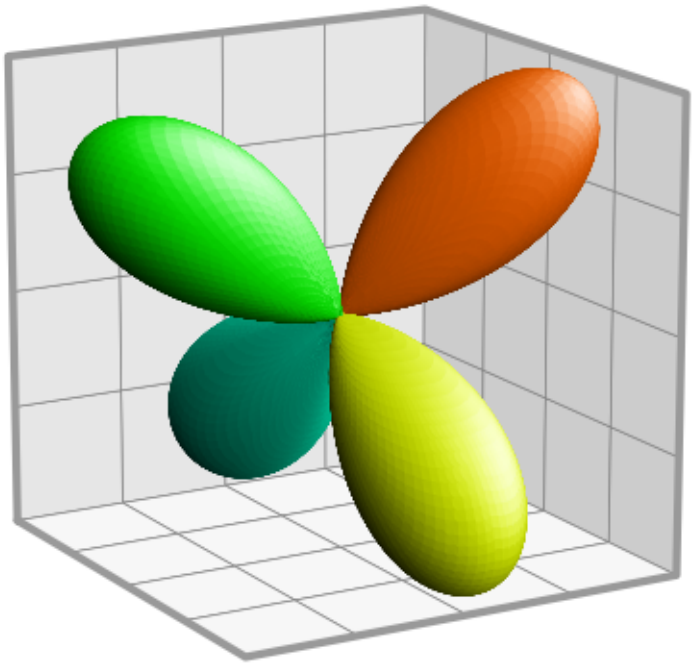

20.5.10 Spherical harmonics, 3D representation

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D10_SphericalHarmonics.py, and the XML code in the file D10_SphericalHarmonics.2D.xml.

See: https://github.com/fzaverl/s3dlib

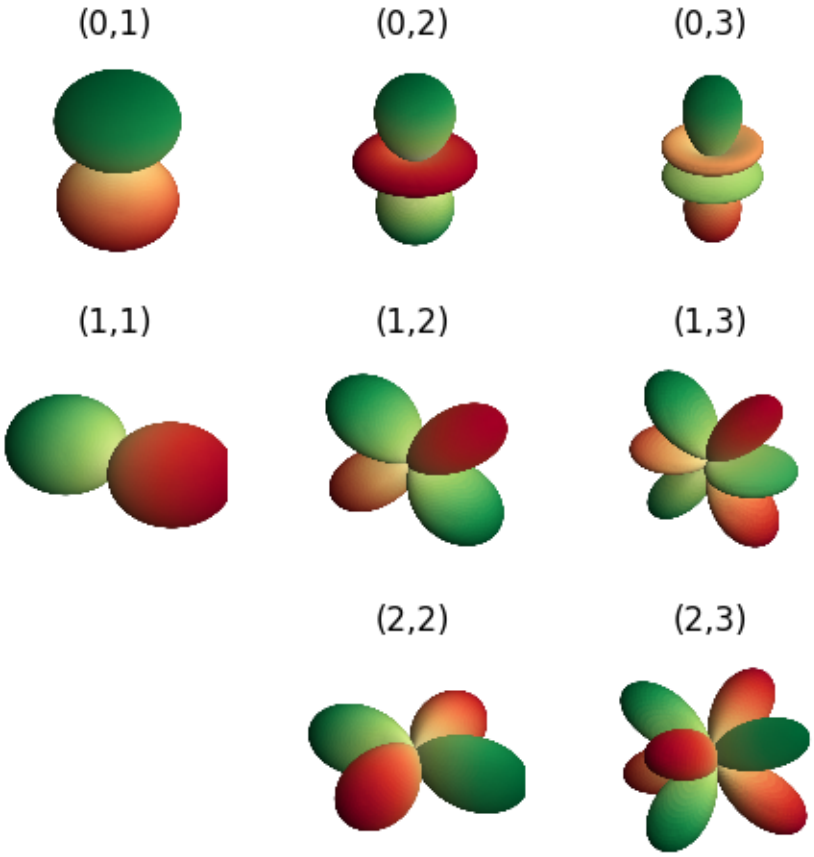

20.5.11 Boy surface

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D11_BoySurface.py

See: https://s3dlib.org/examples/functional/boy.html

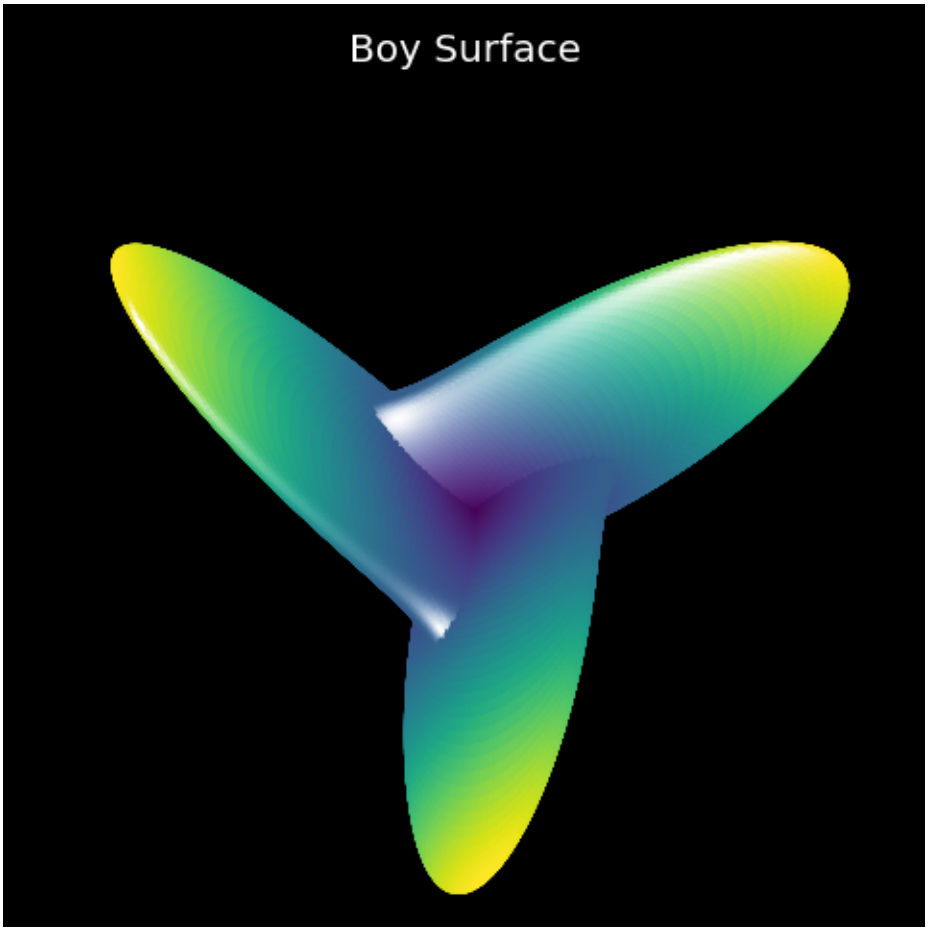

20.5.12 Dini surface

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D12_DiniSurface.py, and the XML code in the file D12_DiniSurface.2D.xml.

See: https://s3dlib.org/examples/functional/dini.html

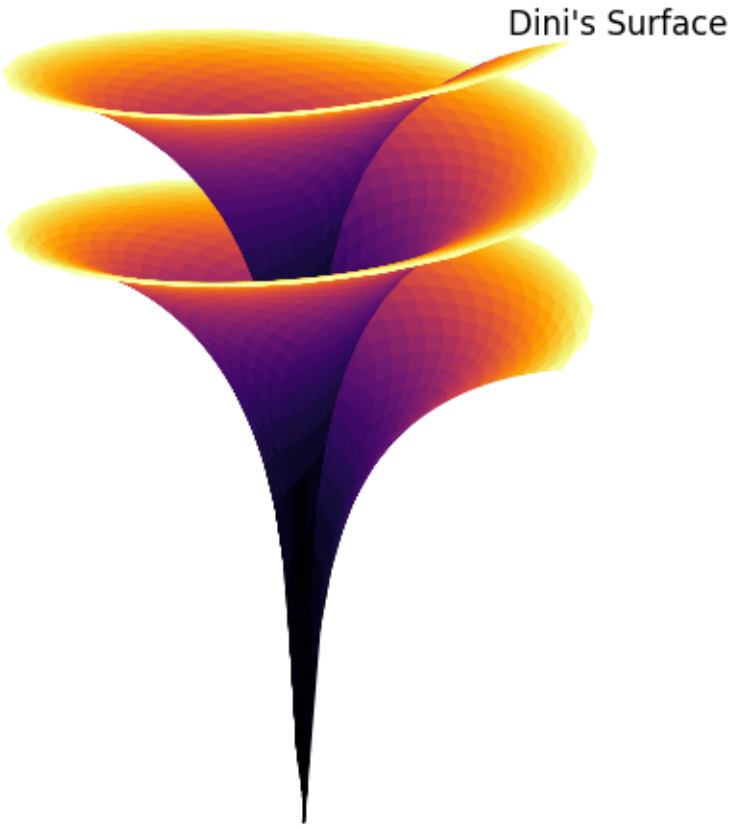

20.5.13 Bour surface

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D13_BourSurface.py, and the XML code in the file D13_BourSurface.2D.xml.

See: https://s3dlib.org/examples/functional/dini.html

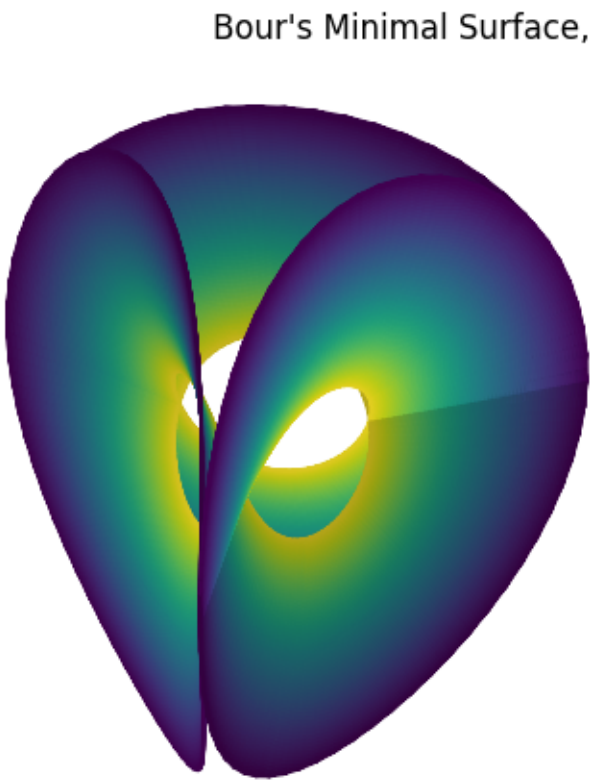

20.5.14 Roman surface

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D14_RomanSurface.py, and the XML code in the file D14_RomanSurface.2D.xml.

See: https://s3dlib.org/examples/functional/roman.html

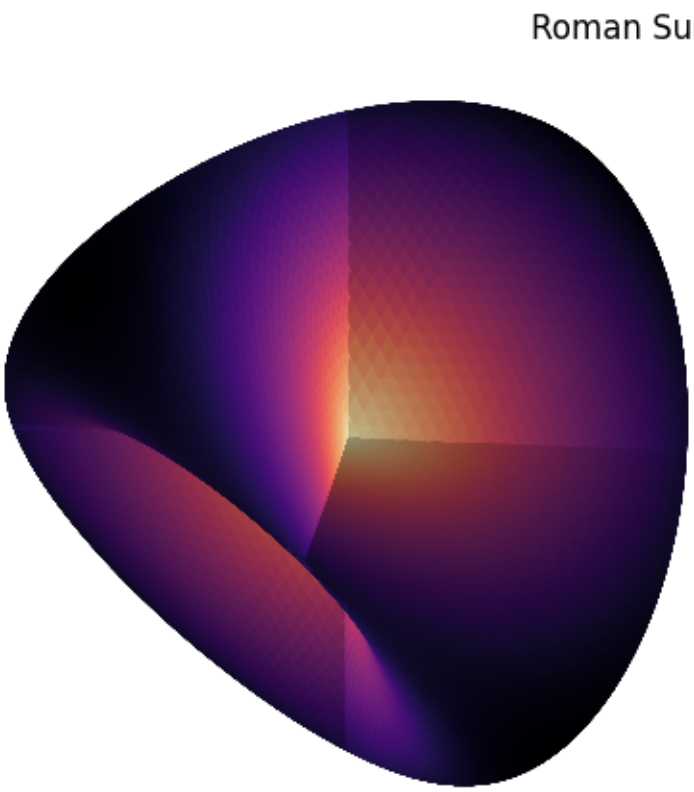

20.5.15 Klein bottle

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D15_KleinBottle.py, and the XML code in the file D15_KleinBottle.2D.xml.

See: https://s3dlib.org/examples/functional/klein_bottle.html

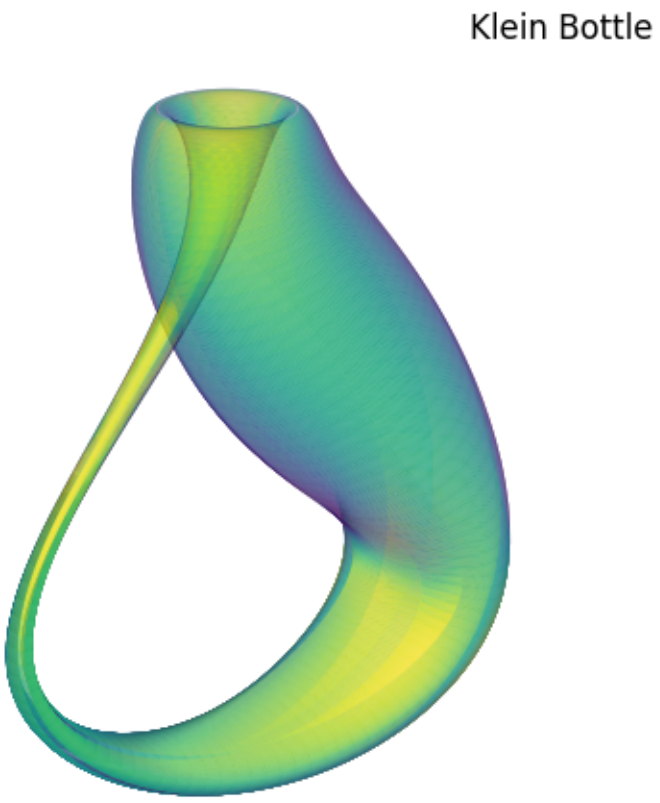

20.5.16 Klein bottle8

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D16_KleinBottle8.py, and the XML code in the file D16_KleinBottle8.2D.xml.

See: https://s3dlib.org/examples/functional/klein_figure8.html

Figure 8 Immersion of the Klein Bottle

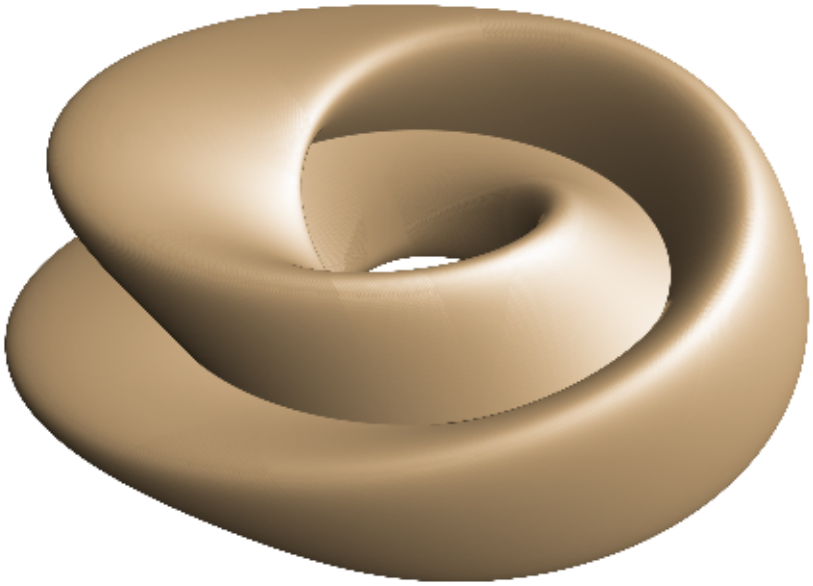

20.6 S3dlib: Image mapping and clipping

20.6.1 Image HSV value clipping

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_Image_HSV_Value_Clipping.py, and the XML code in the file D01_Image_HSV_Value_Clipping.2D.xml.

See: https://s3dlib.org/examples/imagemap/earth_land_clipped.html

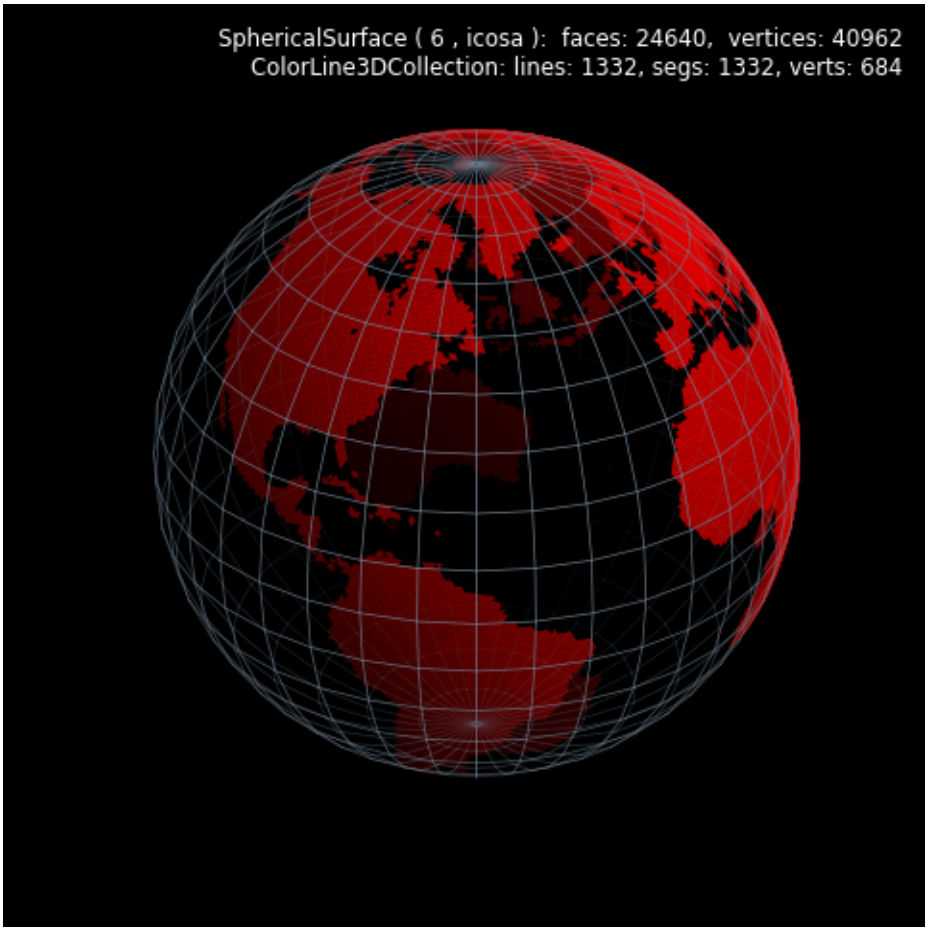

20.6.2 Spherical image mapping

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02_Spherical_ImageMapping.py, and the XML code in the file D02_Spherical_ImageMapping.2D.xml.

See: https://s3dlib.org/examples/imagemap/earth_shaded.html

20.6.3 Earth in 3D

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03_Earth3D.py, and the XML code in the file D03_Earth3D.2D.xml.

See: https://github.com/fzaverl/s3dlib

20.6.4 Cylindrical image mapping

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04_Cylindrical_ImageMapping.py, and the XML code in the file D04_Cylindrical_ImageMapping.2D.xml.

See: https://s3dlib.org/examples/imagemap/mars_cyl.html

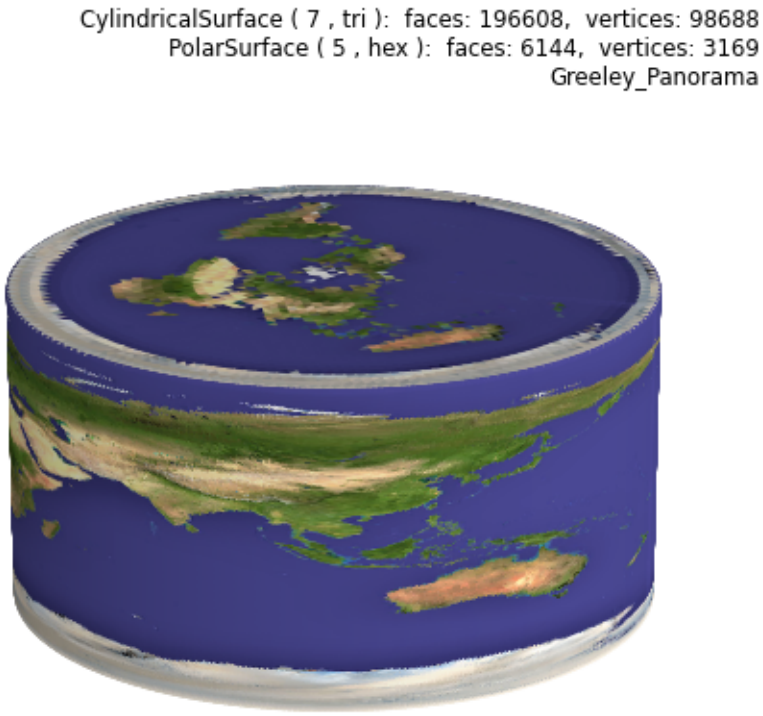

20.6.5 Imaginary Earth, part A

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05_Imaginary_Earth_a.py, and the XML code in the file D05_Imaginary_Earth_a.2D.xml.

See: https://s3dlib.org/examples/imagemap/imaginary_earth.html

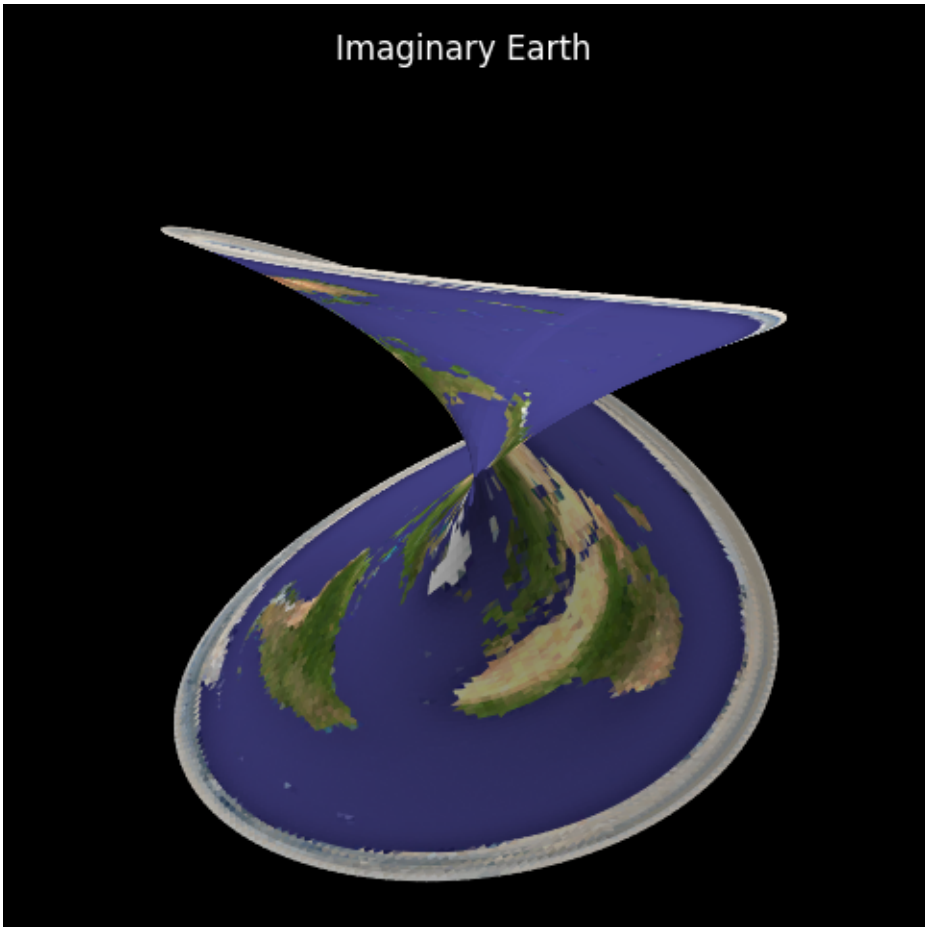

20.6.6 Imaginary Earth, part B

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06_Imaginary_Earth_b.py, and the XML code in the file D06_Imaginary_Earth_b.2D.xml.

See: https://s3dlib.org/examples/imagemap/imaginary_earth.html

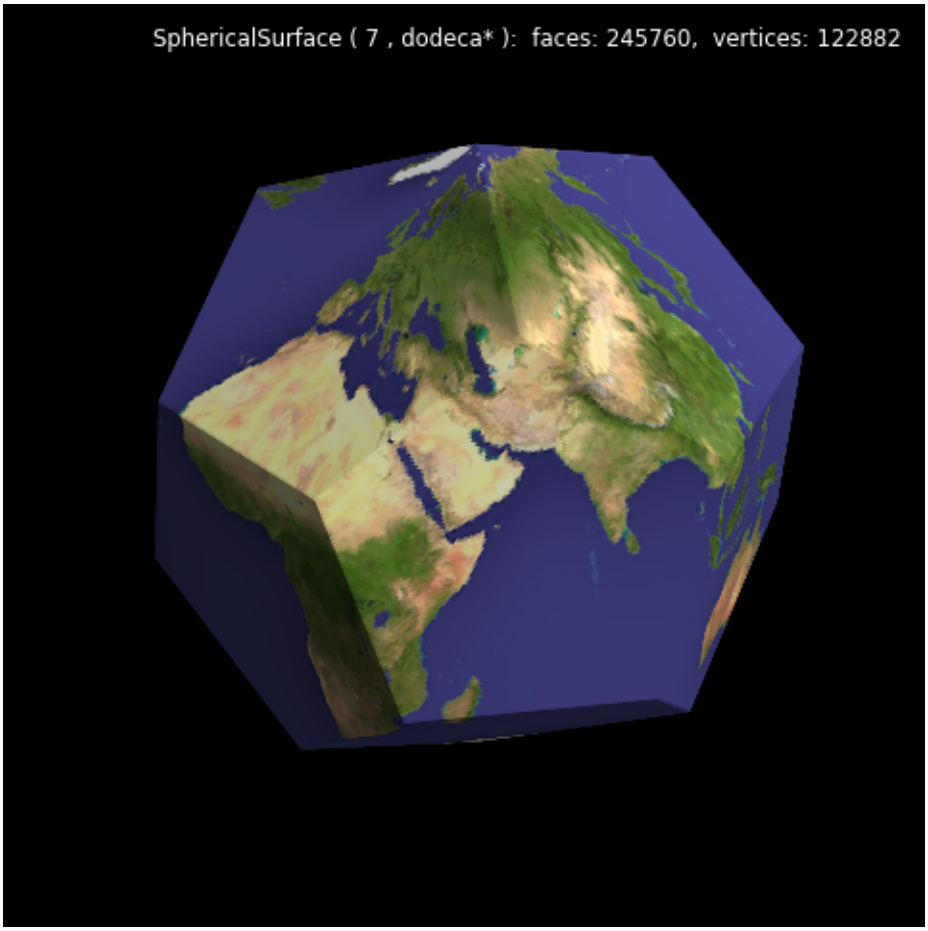

20.6.7 Earth, projected on Klein bottle

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07_Klein_Earth_a.py, and the XML code in the file D07_Klein_Earth_a.2D.xml.

See: https://s3dlib.org/examples/imagemap/earth_klein.html

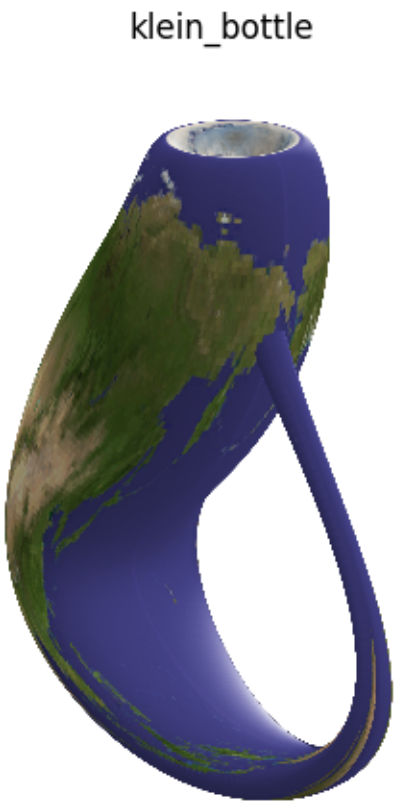

20.6.8 Earth, projected on planar, screw, knot and swirl surfaces

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D08_Klein_Earth_b.py, and the XML code in the file D08_Klein_Earth_b.2D.xml.

See: https://s3dlib.org/examples/imagemap/earth_klein.html

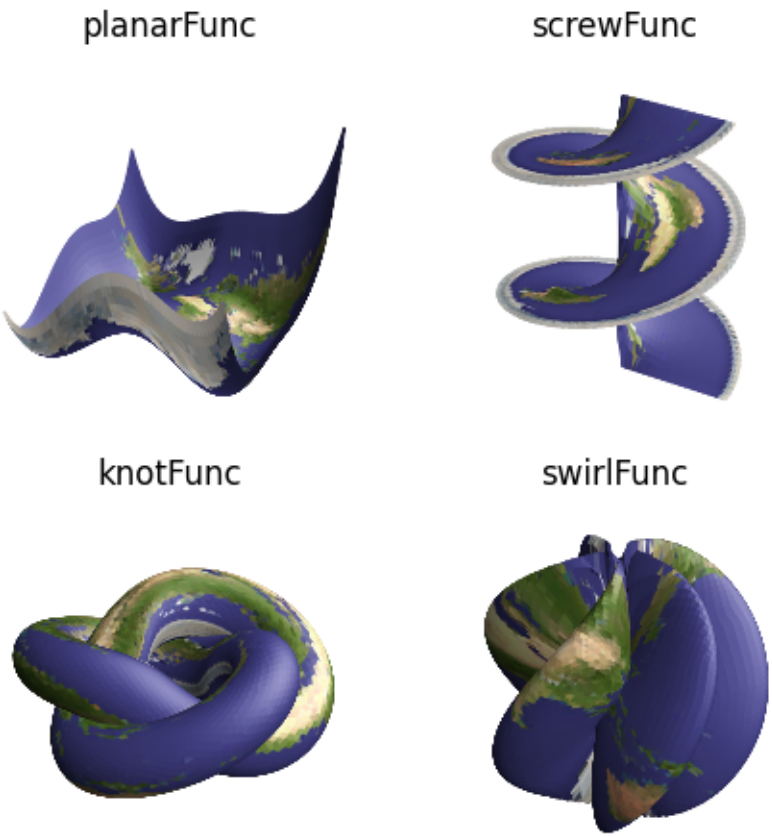

20.7 S3dlib: Edge-to-edge surface coloring

20.7.1 Platonic solid, with surface edges filled, part 1

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_Platonic_Solid_Surface_Edges_Filled.py, and the XML code in the file D01_Platonic_Solid_Surface_Edges_Filled.2D.xml.

See: https://s3dlib.org/examples/lines/platonic_proj.html

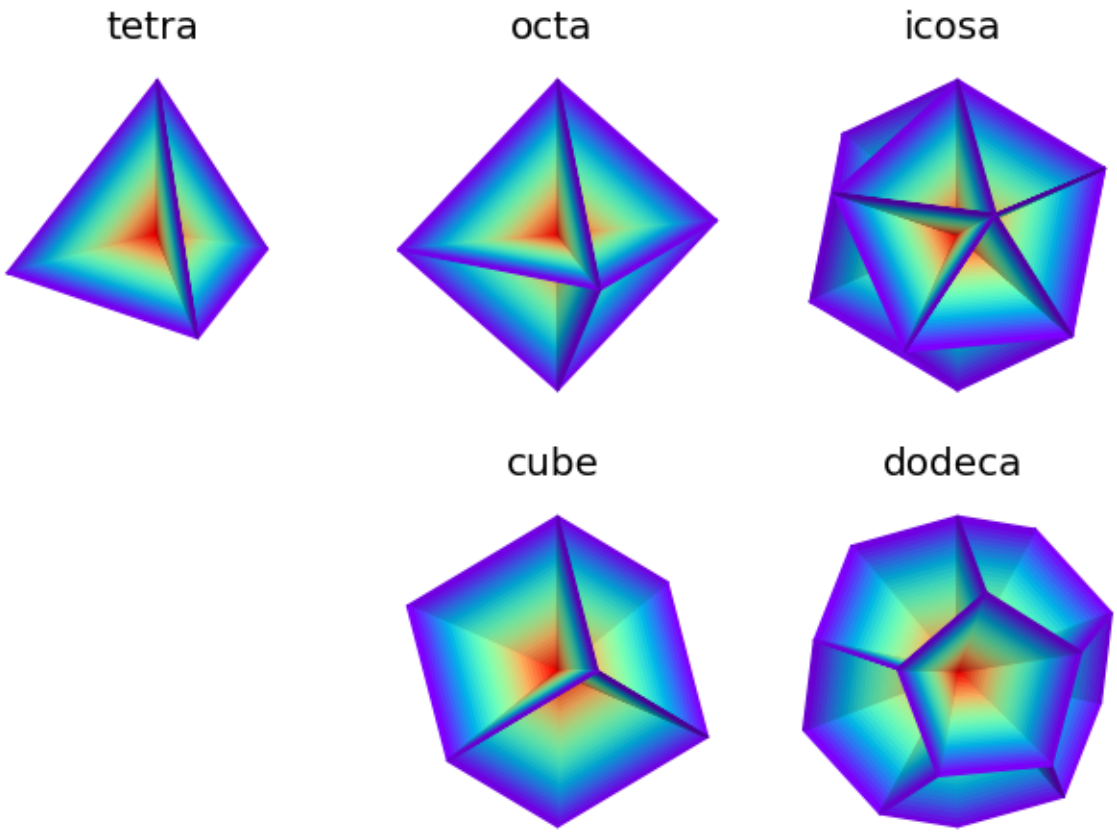

20.7.2 Platonic solid, with surface edges filled, part 2

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02_Platonic_Solid_Surface_Edges_Filled.py, and the XML code in the file D02_Platonic_Solid_Surface_Edges_Filled.2D.xml.

See: https://s3dlib.org/examples/lines/platonic_proj.html

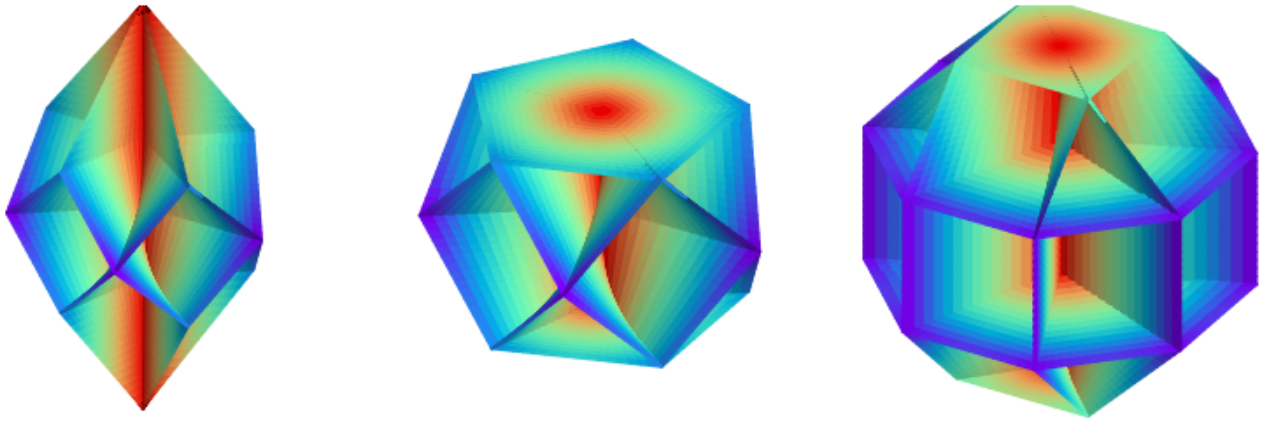

20.7.3 Spherical contour surface, filled

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03_Spherical_Contour_Filled_Surface.py, and the XML code in the file D03_Spherical_Contour_Filled_Surface.2D.xml.

See: https://s3dlib.org/examples/lines/filled_octa_cont.html

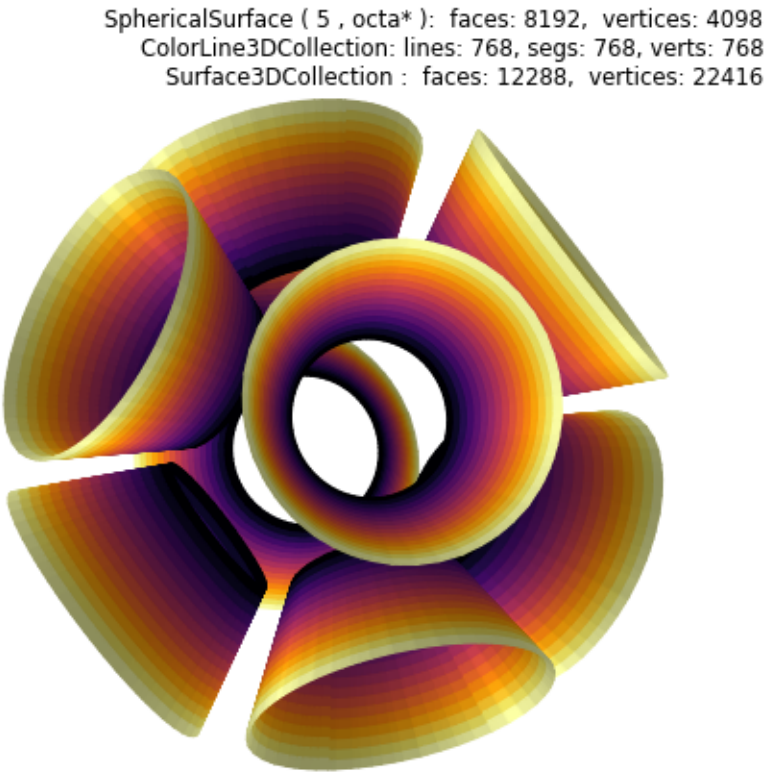

20.7.4 Edge-to-edge surface, part 1

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04_Edge_to_Edge_Surface.py, and the XML code in the file D04_Edge_to_Edge_Surface.2D.xml.

See: https://s3dlib.org/examples/lines/surf_edge2edge.html

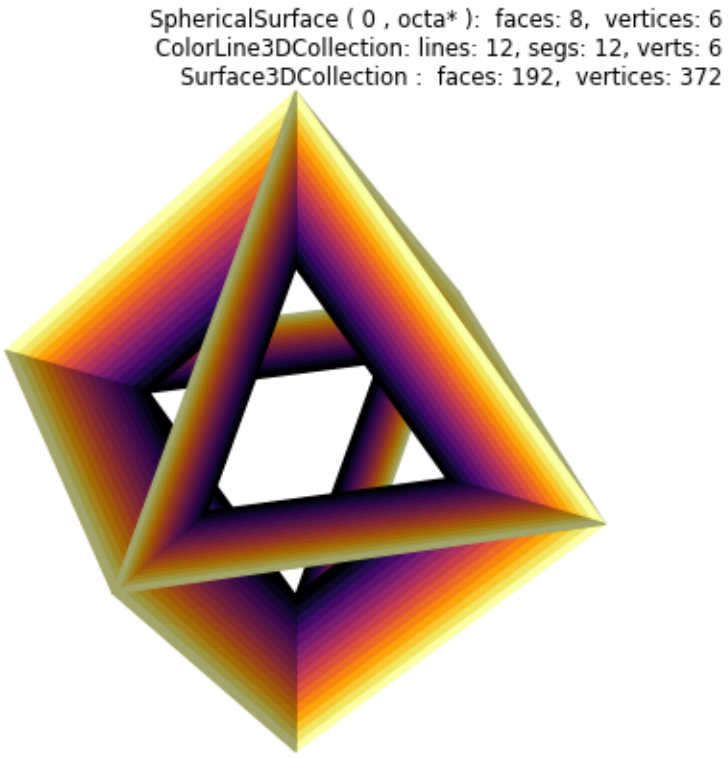

20.7.5 Spherical edge surface, filled

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06_Spherical_Edge_Filled_Surface_2.py, and the XML code in the file D06_Spherical_Edge_Filled_Surface_2.2D.xml.

See: https://s3dlib.org/examples/lines/filled_octa_edges.html

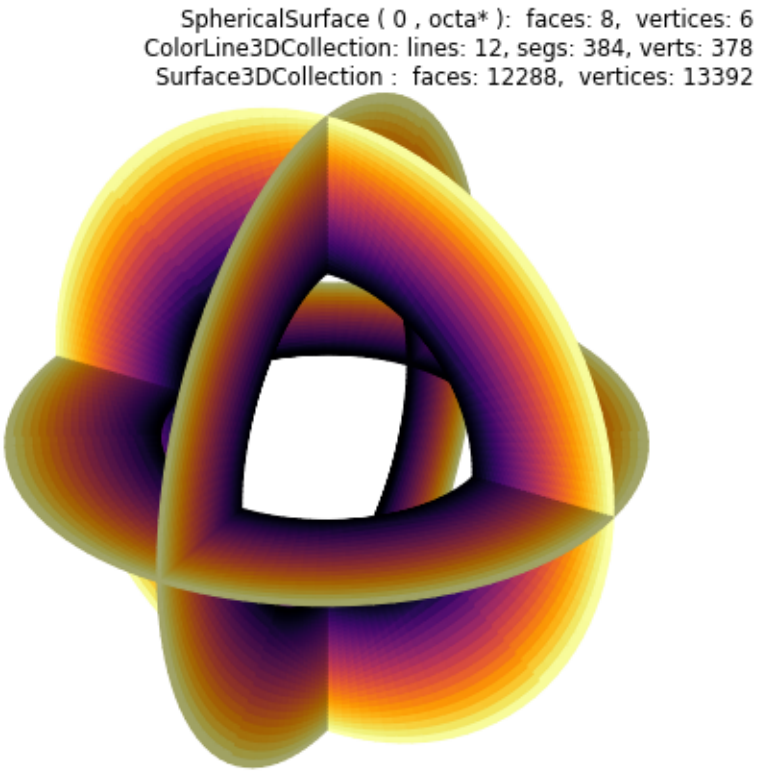

20.7.6 Edge-to-edge surface, part 2

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06_Spherical_Edge_Filled_Surface_2.py, and the XML code in the file D06_Spherical_Edge_Filled_Surface_2.2D.xml.

See: https://s3dlib.org/examples/lines/surf_edge2edge_2.html

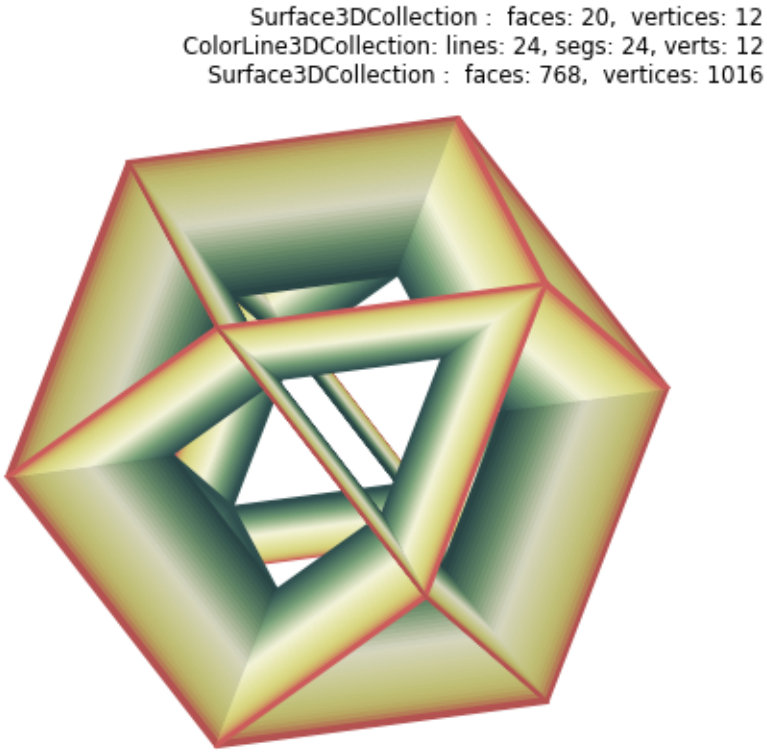

20.7.7 Line colormap sequence

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07_Line_Colormap_Sequence.py, and the XML code in the file D07_Line_Colormap_Sequence.2D.xml.

See: https://s3dlib.org/examples/lines/loop3d.html

ParametricLine (9):: lines: 1, segs: 1024, verts: 1025
sop() sequential operation

20.7.8 Sequential line color, part 1

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D08_Sequential_Line_Color.py, and the XML code in the file D08_Sequential_Line_Color.2D.xml.

See: https://s3dlib.org/examples/lines/lorenz_seq.html

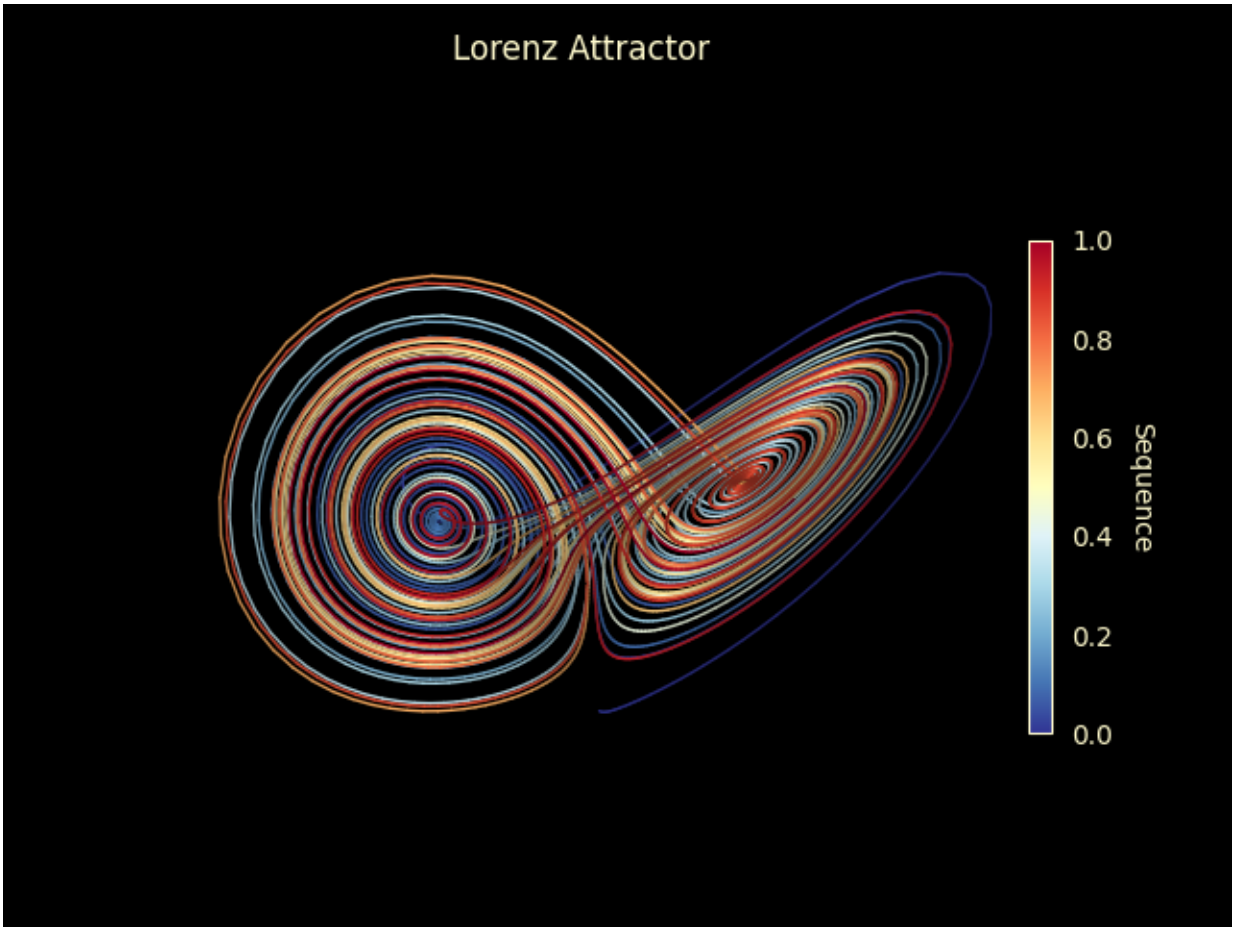

20.7.9 Sequential line color, part 2

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D09_Sequential_Line_Color2.py, and the XML code in the file D09_Sequential_Line_Color2.2D.xml.

See: https://s3dlib.org/examples/lines/lorenz_op.html

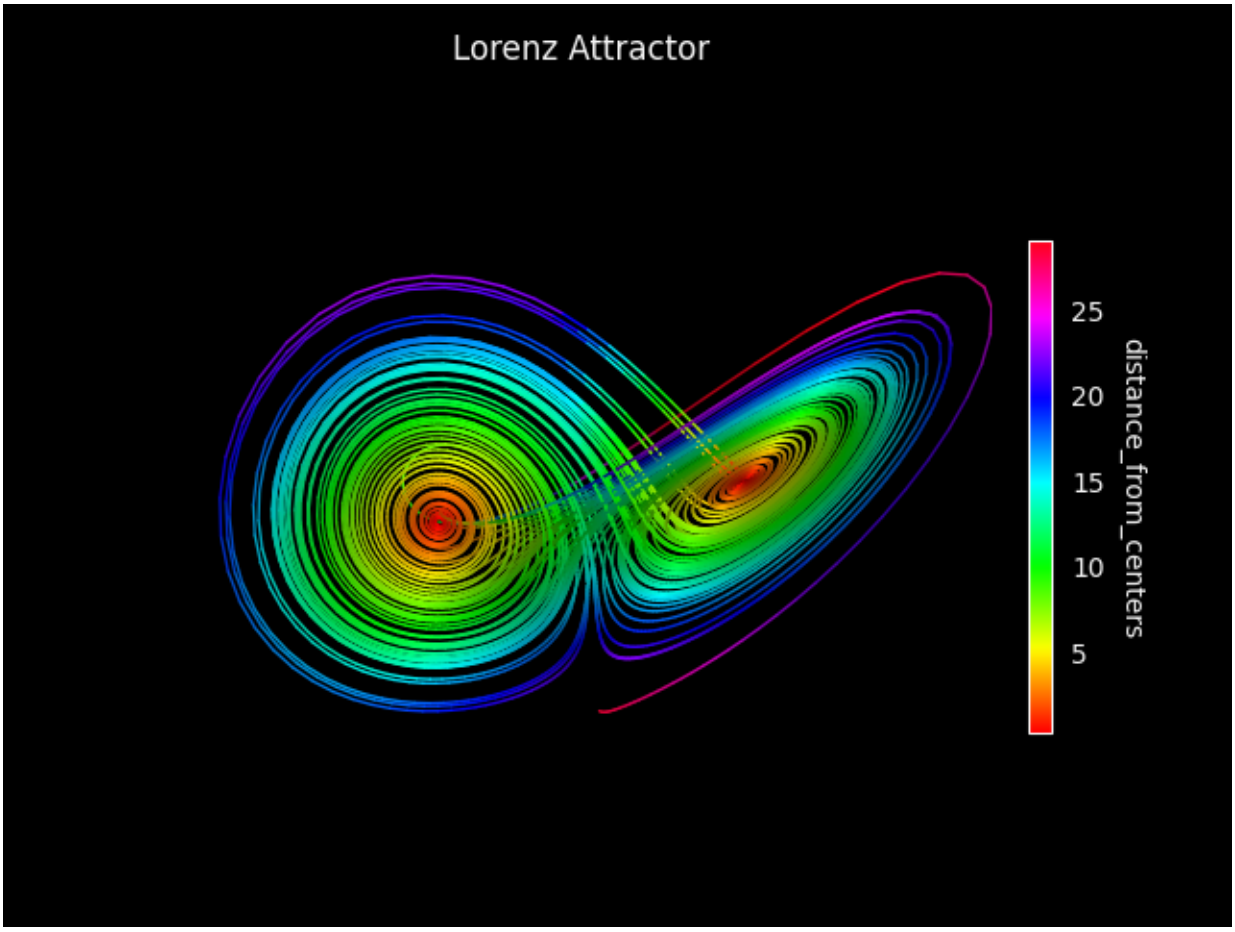

20.8 S3dlib: Decorative parametric surfaces

20.8.1 Shell surface with colormap

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_Surface_Colormap_2.py, and the XML code in the file D01_Surface_Colormap_2.2D.xml.

See: https://s3dlib.org/examples/colormaps/shell.html

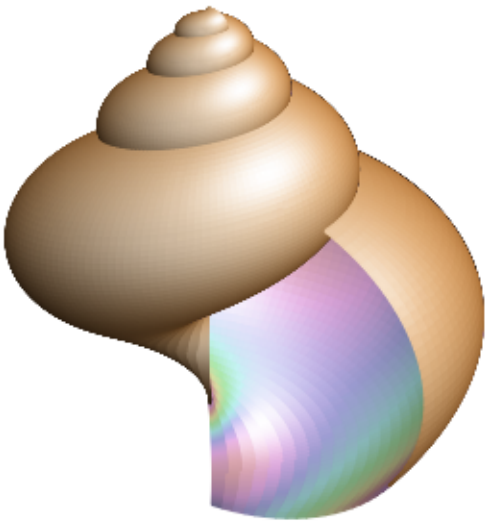

SphericalSurface (5.3 , grid_x): faces: 32400, vertices: 33001

20.8.2 Escher Knot

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02_Escher_Knot_2.py, and the XML code in the file D02_Escher_Knot_2.2D.xml.

See: https://s3dlib.org/examples/showcase/mceknot_2.html

20.8.3 Escher sphere spirals

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03_Escher_Sphere_Spirals.py, and the XML code in the file D03_Escher_Sphere_Spirals.2D.xml.

See: https://s3dlib.org/examples/showcase/sphericalspirals.html

20.8.4 Escher spirals

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04_Escher_Spirals.py, and the XML code in the file D04_Escher_Spirals.2D.xml.

See: https://s3dlib.org/examples/showcase/spirals.html

20.9 S3dlib: Geometric and color datagrid mapping (requires scipy)

20.9.1 Mandelbrot contours

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_Mandelbrot_Contours.py, and the XML code in the file D01_Mandelbrot_Contours.2D.xml.

See: https://s3dlib.org/examples/lines/mand_contours.html

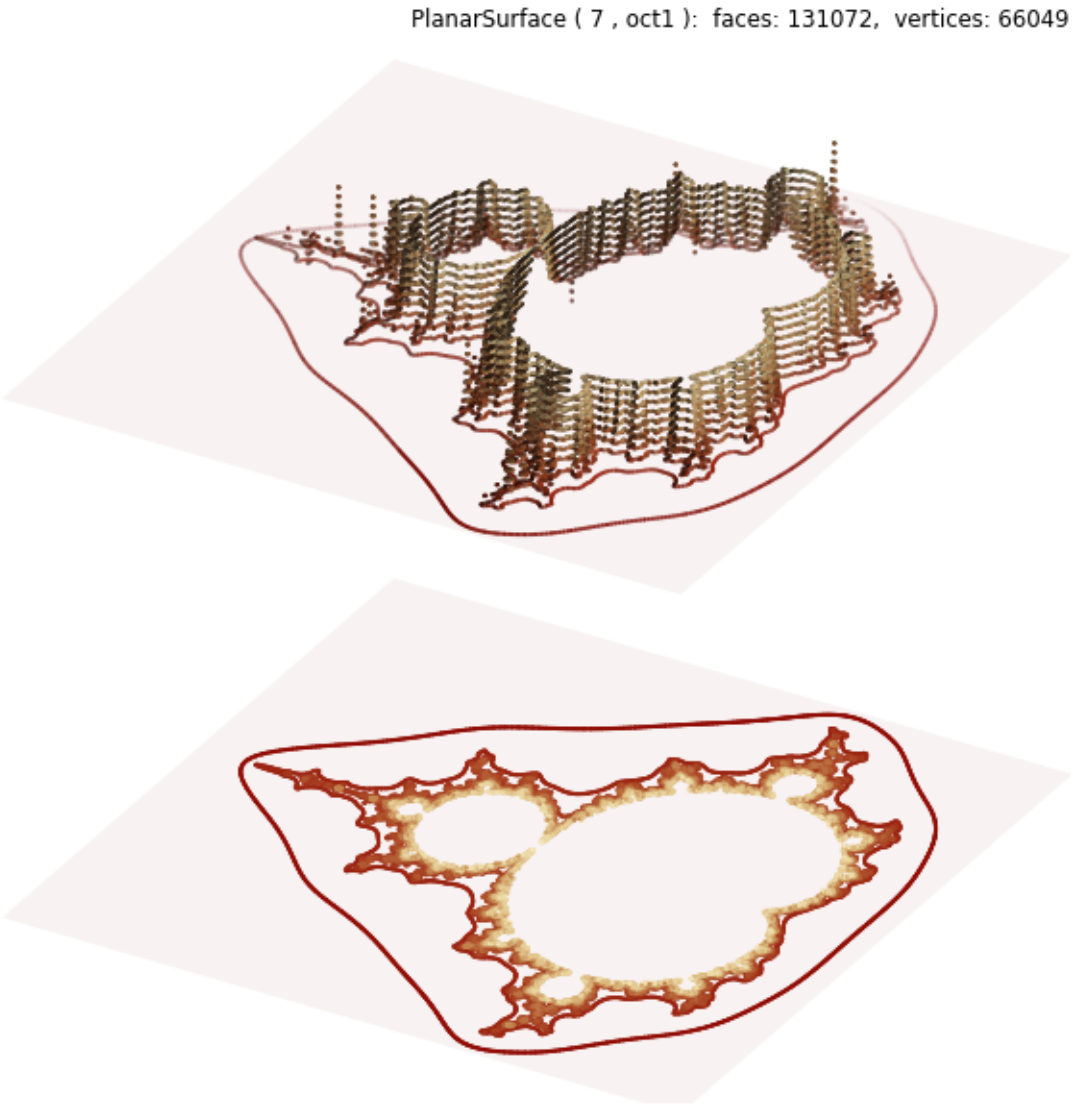

20.9.2 Geometric and color datagrid mapping

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02_GeometricMapping.py, and the XML code in the file D02_GeometricMapping.2D.xml.

See: https://s3dlib.org/examples/datagridmap/jacks_shaded.html

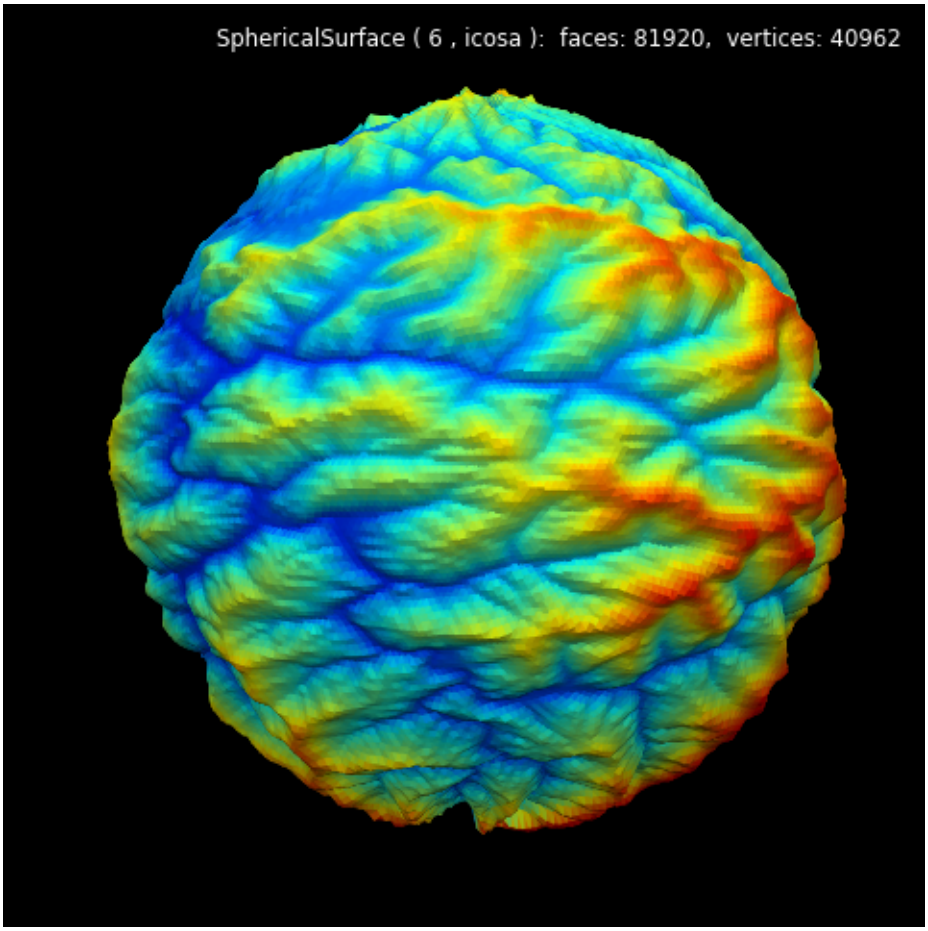

20.9.3 MRI 3D

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03_MRI_3D.py, and the XML code in the file D03_MRI_3D.2D.xml.

See: https://s3dlib.org/examples/datagridmap/mri_3d.html

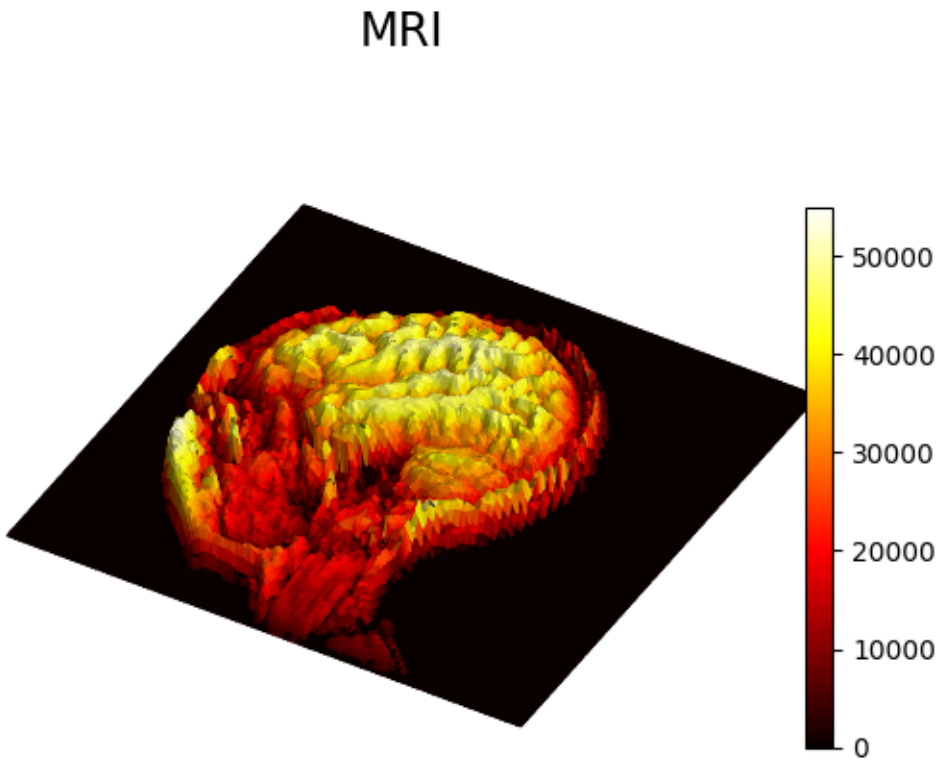

PlanarSurface (6 , oct1): faces: 32768, vertices: 16641

20.9.4 Jacksboro fault

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04_Jacksboro_Fault.py, and the XML code in the file D04_Jacksboro_Fault.2D.xml.

See: https://s3dlib.org/examples/datagridmap/jacks_shaded2.html

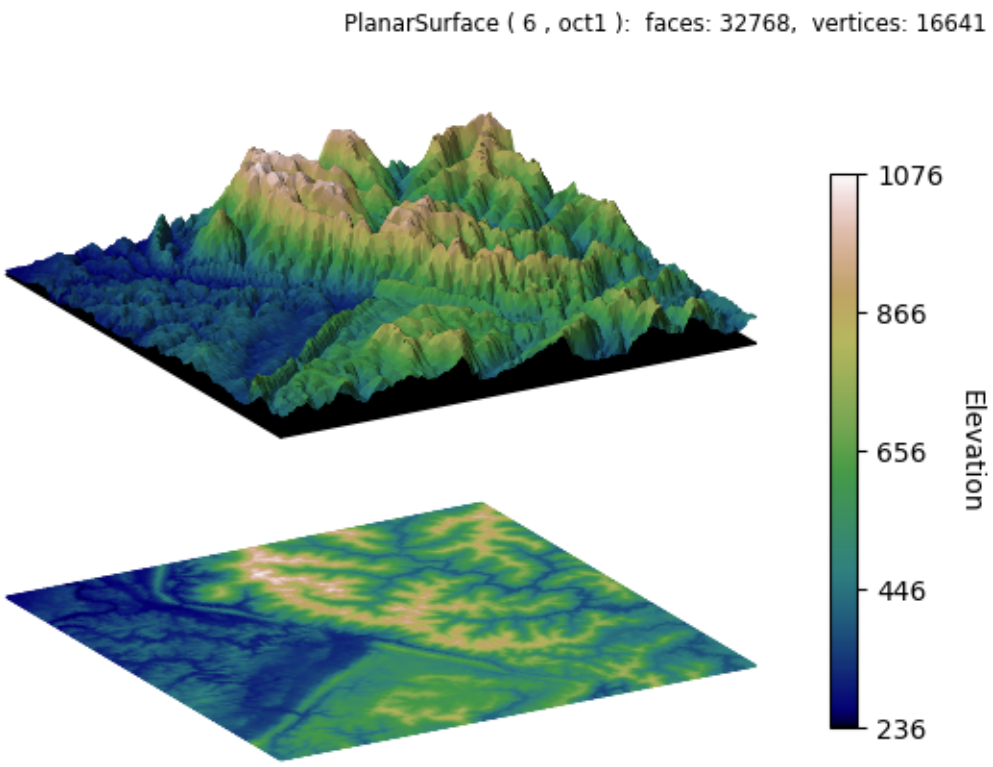

20.9.5 Mandelbrot 3D

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05_Mandelbrot_3D.py, and the XML code in the file D05_Mandelbrot_3D.2D.xml.

See: https://s3dlib.org/examples/datagridmap/mandelbrot.html

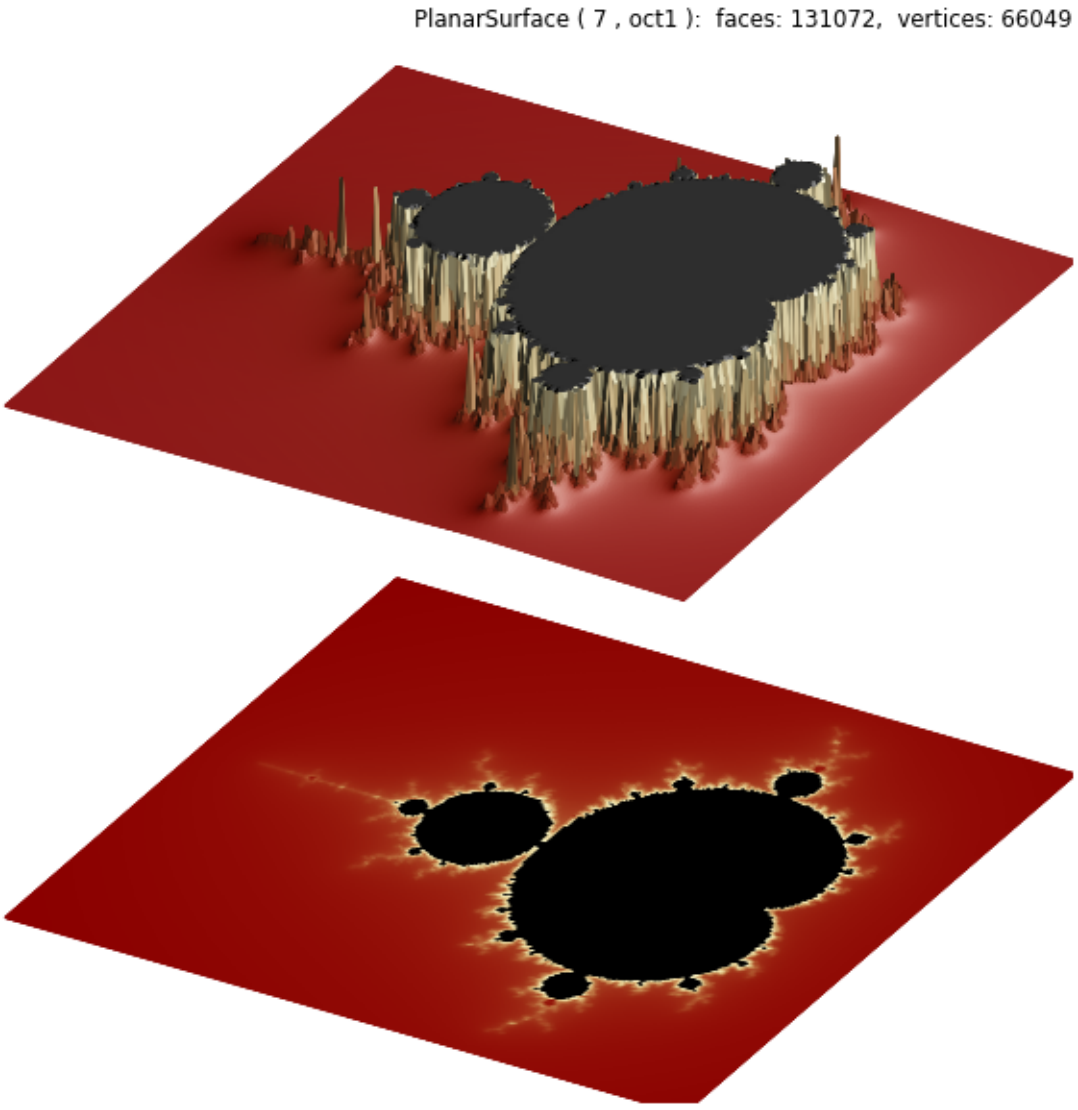

20.9.6 MRI regions

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06_MRI_Regions.py, and the XML code in the file D06_MRI_Regions.2D.xml.

See: https://s3dlib.org/examples/colormaps/mri.html

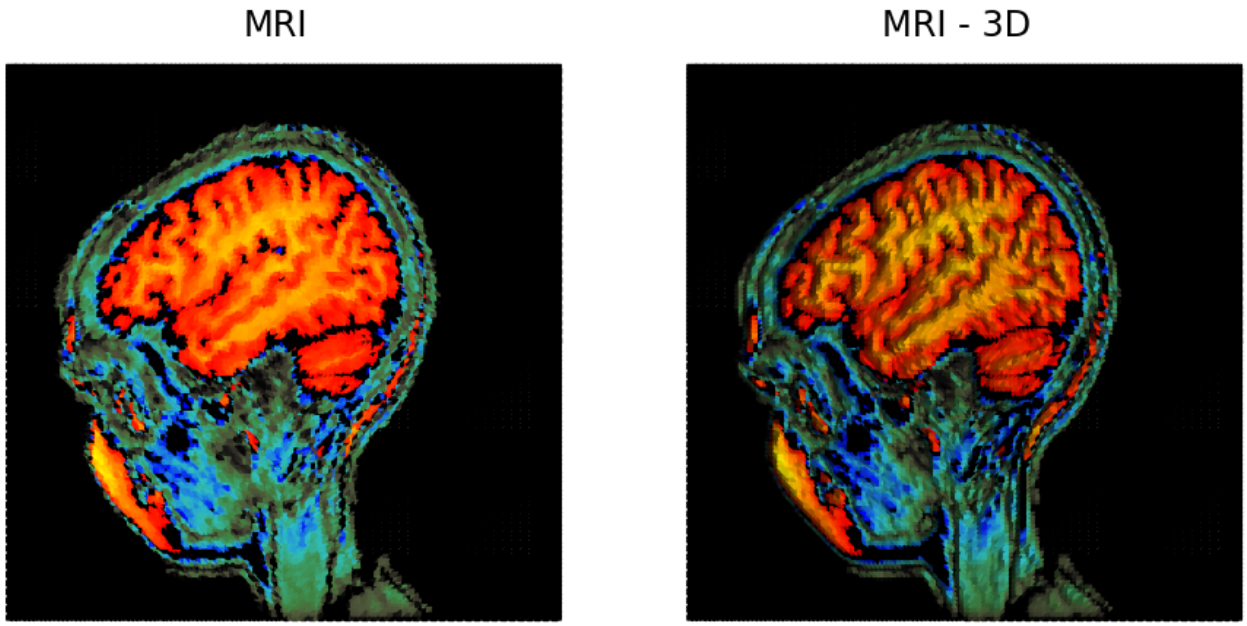

PlanarSurface (6 , oct1): faces: 32768, vertices: 16641

20.10 S3dlib: Implicit surfaces (requires scikit-image)

20.10.1 Sphere (implicit definition), part 1

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_Sphere_Implicit_a.py, and the XML code in the file D01_Sphere_Implicit_a.2D.xml.

See: https://s3dlib.org/examples/functional/world_hello.html

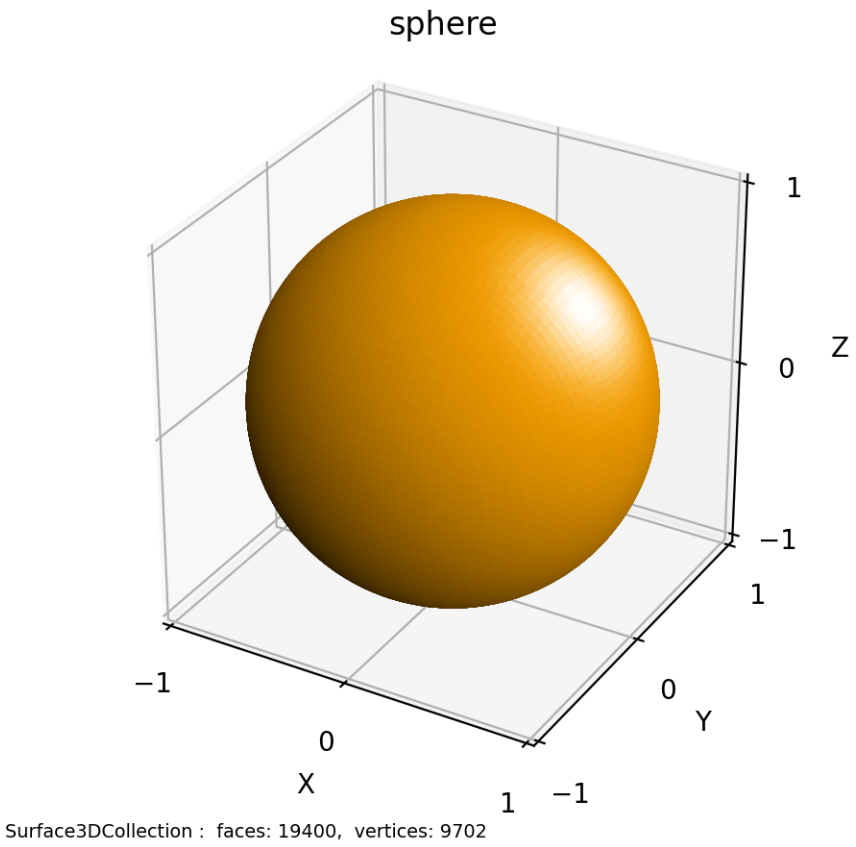

20.10.2 Sphere (implicit definition), part 2

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02_Sphere_Implicit_b.py, and the XML code in the file D02_Sphere_Implicit_b.2D.xml.

See: https://s3dlib.org/examples/functional/world_hello.html

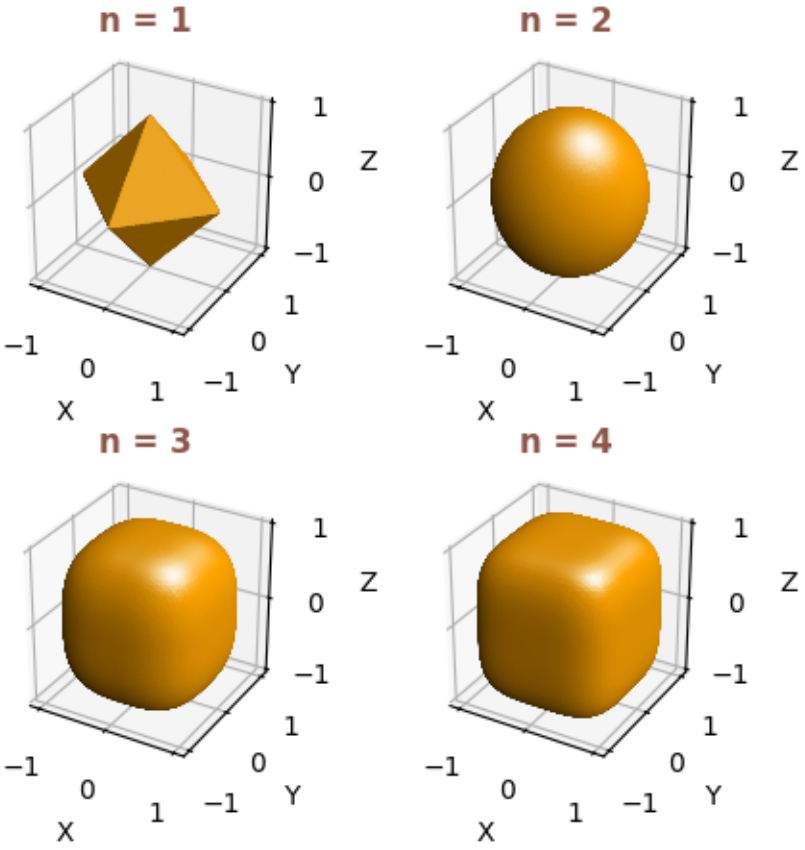

20.10.3 Goursat surface

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03_Goursat_Surface.py, and the XML code in the file D03_Goursat_Surface.2D.xml.

See: https://s3dlib.org/examples/functional/goursat.html

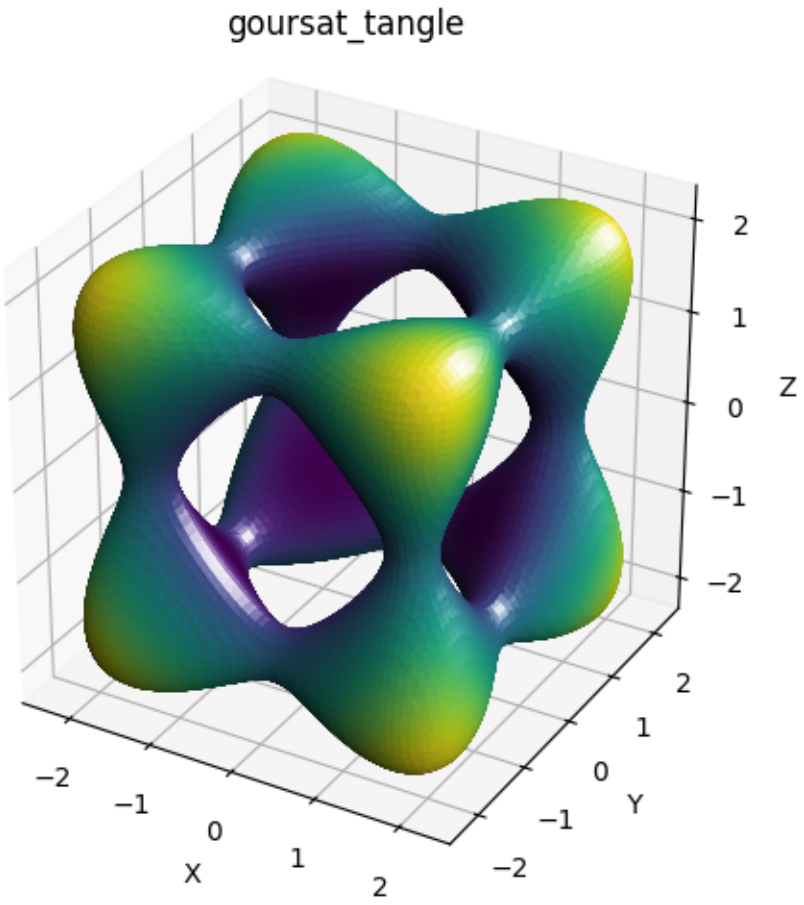

20.10.4 Schwarz P surface

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04_Schwarz_P_Surface.py, and the XML code in the file D04_Schwarz_P_Surface.2D.xml.

See: https://s3dlib.org/examples/functional/schwarz.html

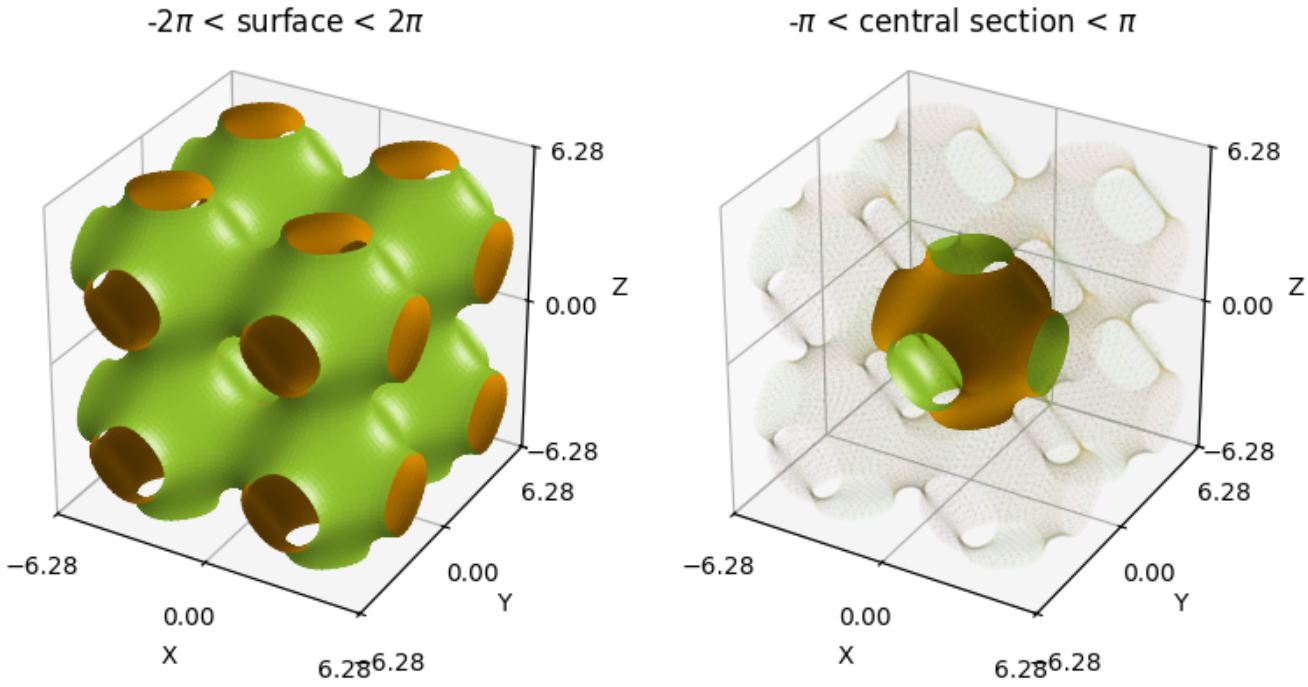

20.10.5 Nodal surface

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05_Nodal_Surface.py, and the XML code in the file D05_Nodal_Surface.2D.xml.

See: https://s3dlib.org/examples/functional/nodesurf.html

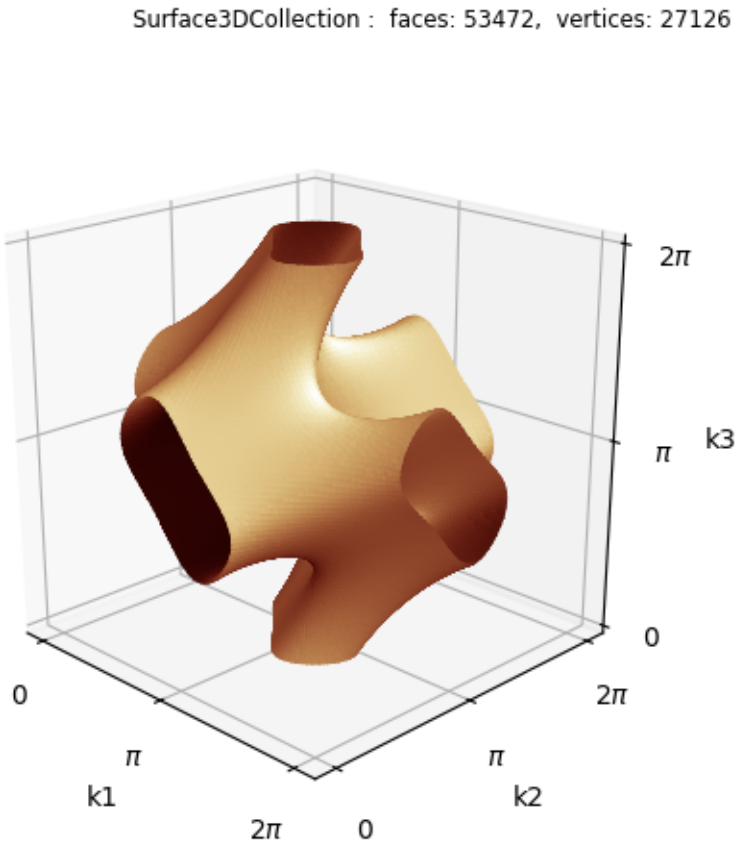

20.10.6 Spirals surface

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06_Spirals_Surface.py, and the XML code in the file D06_Spirals_Surface.2D.xml.

See: https://s3dlib.org/examples/functional/spiralsurf.html

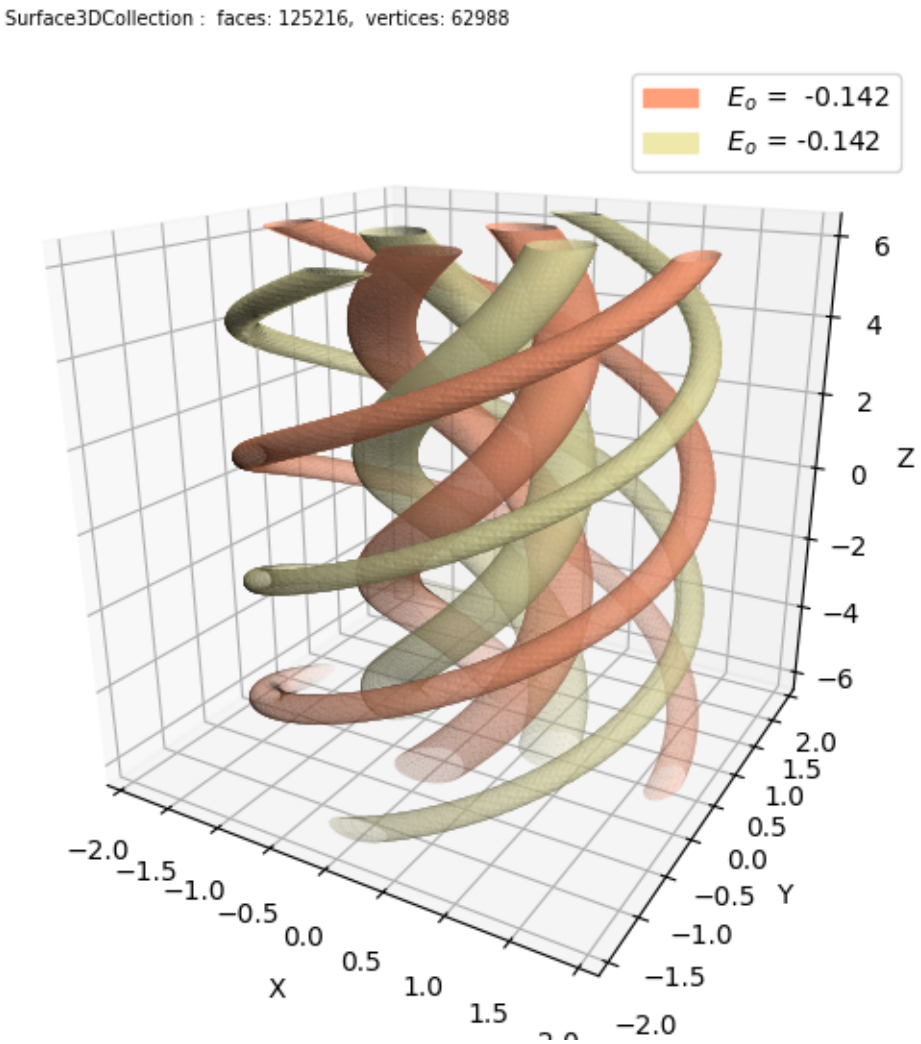

20.10.7 Iso surface

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07_Iso_Surface.py, and the XML code in the file D07_Iso_Surface.2D.xml.

See: https://s3dlib.org/examples/functional/mayavi_surfcont.html

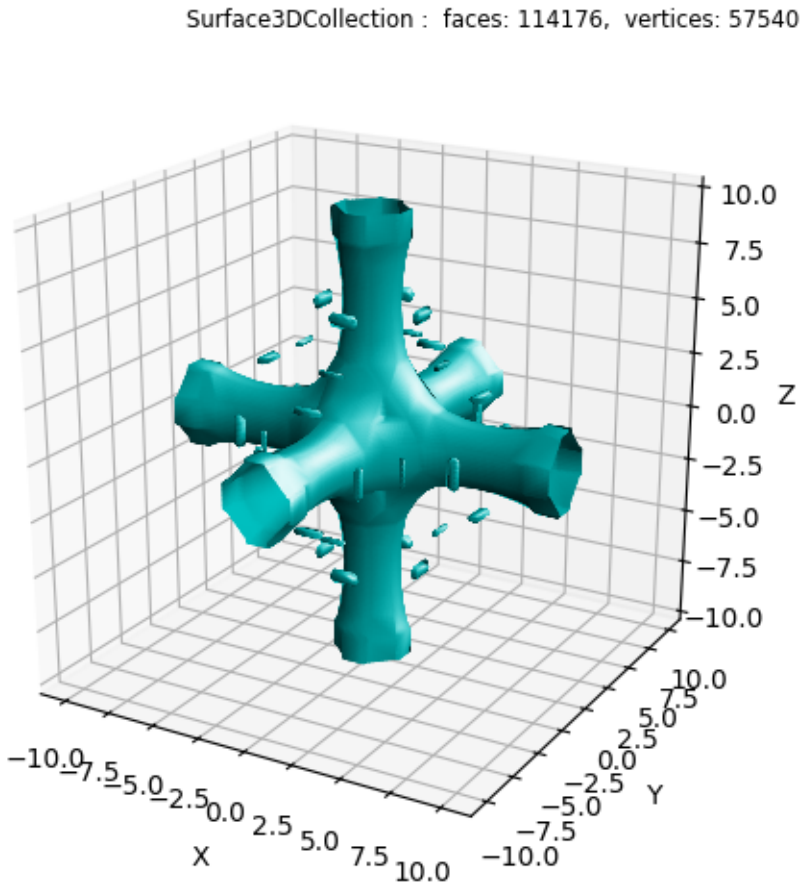

20.10.8 Implicit surface

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D08_Implicit_Surface.py, and the XML code in the file D08_Implicit_Surface.2D.xml.

See: https://s3dlib.org/examples/functional/bc_surf.html

CHAPTER

TWENTYONE

PLOTLY

21.1 General surface plots in 3D

See Test2DFunctions

21.1.1 Mount Bruno

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_Plotly3D_MtBruno.py, and the XML code in the file D01_Plotly3D_MtBruno.2D.xml.

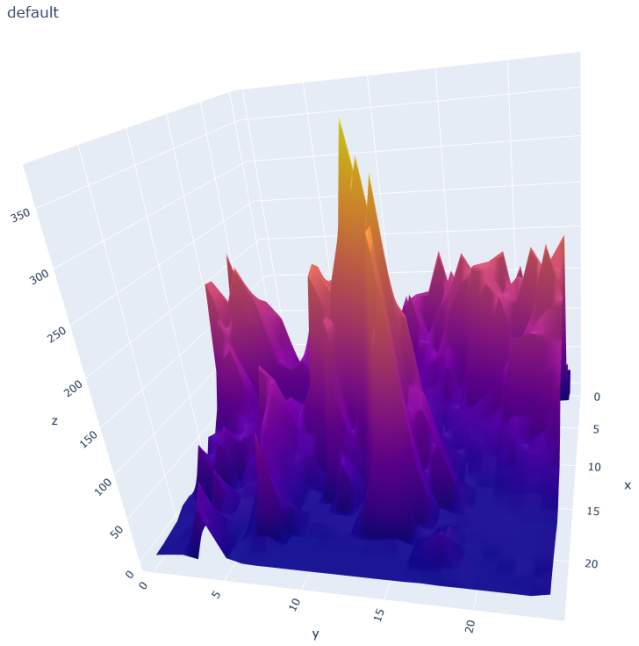

21.1.2 Ring Cyclide

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02_Plotly3D_RingCyclide.py, and the XML code in the file D02_Plotly3D_RingCyclide.2D.xml.

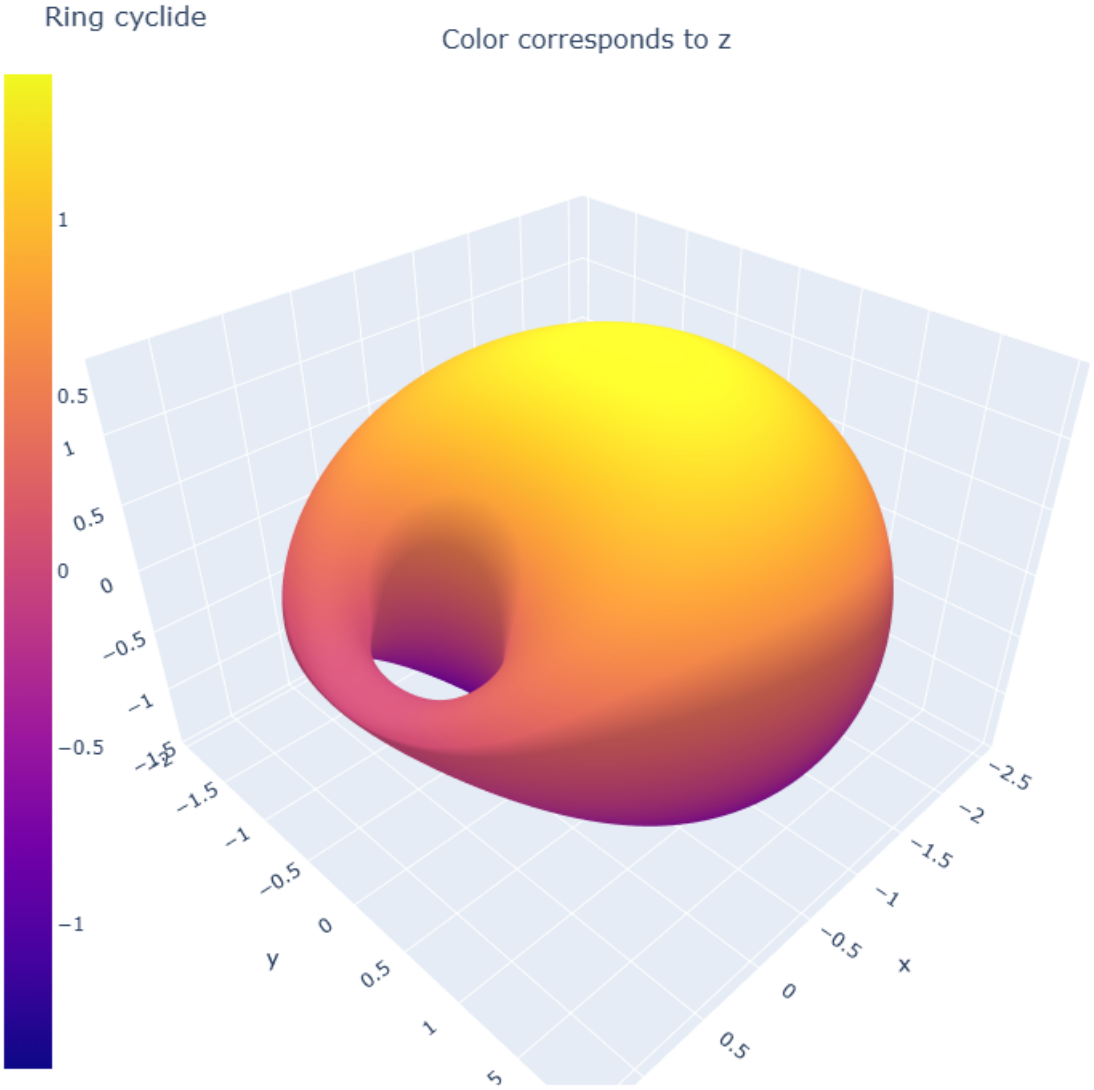

21.1.3 Torus

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03_Plotly3D_Torus.py, and the XML code in the file D03_Plotly3D_Torus.2D.xml.

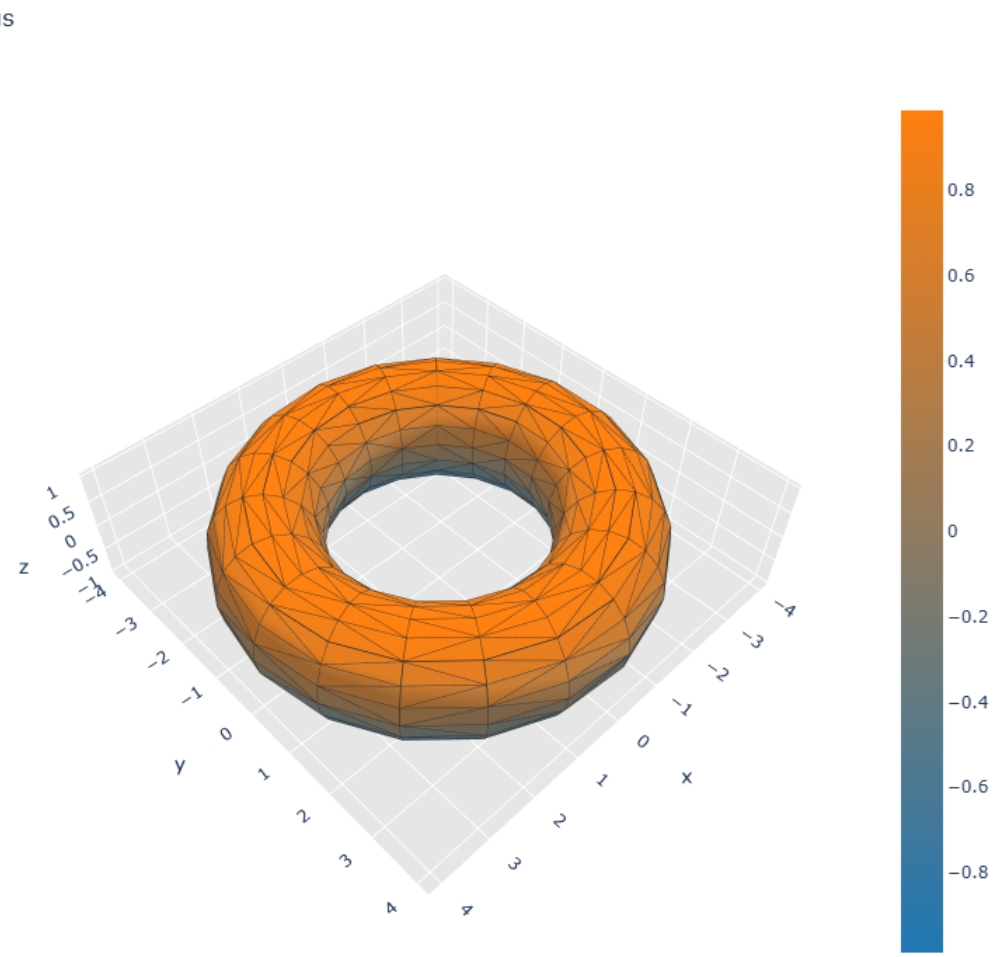

21.1.4 Möbius surface

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04_Plotly3D_M%C3%B6bius.py, and the XML code in the file D04_Plotly3D_M%C3%B6bius.2D.xml.

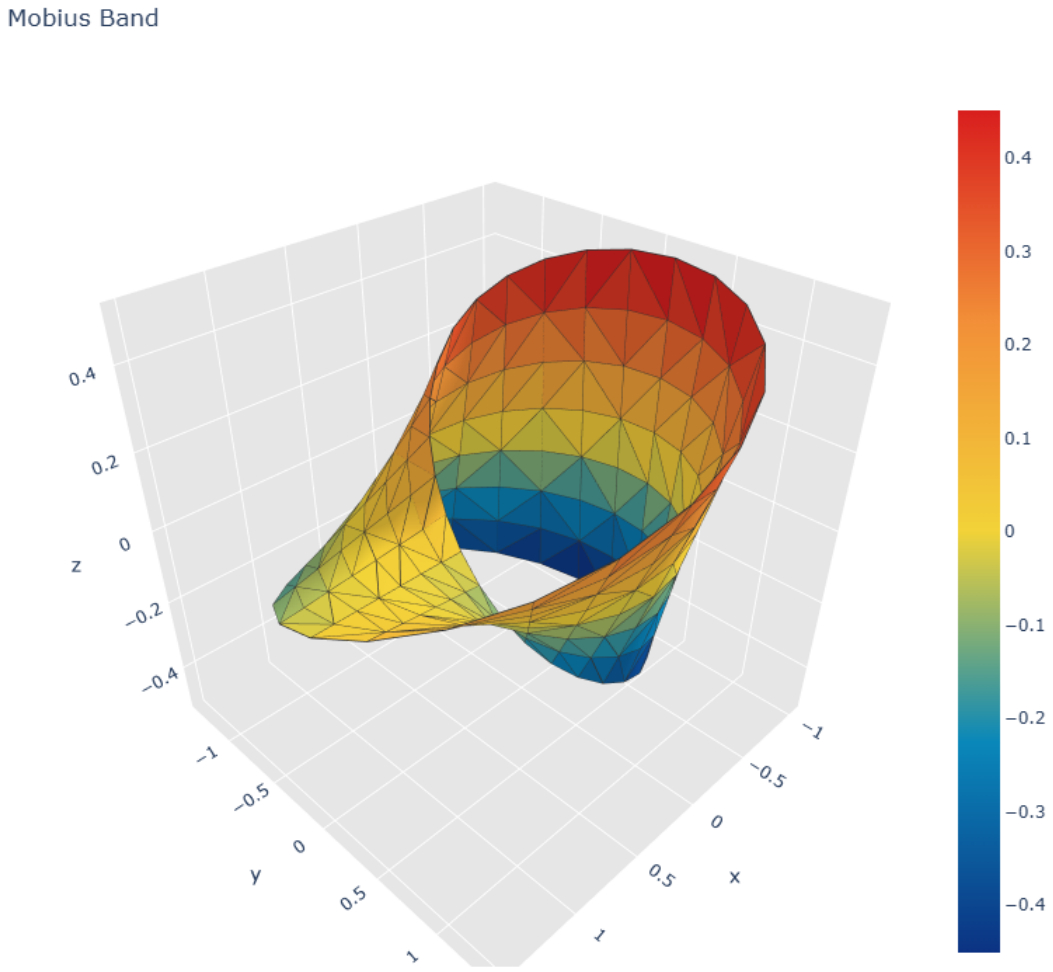

21.1.5 Boy surface

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05_Plotly3D_Boy.py, and the XML code in the file D05_Plotly3D_Boy.2D.xml.

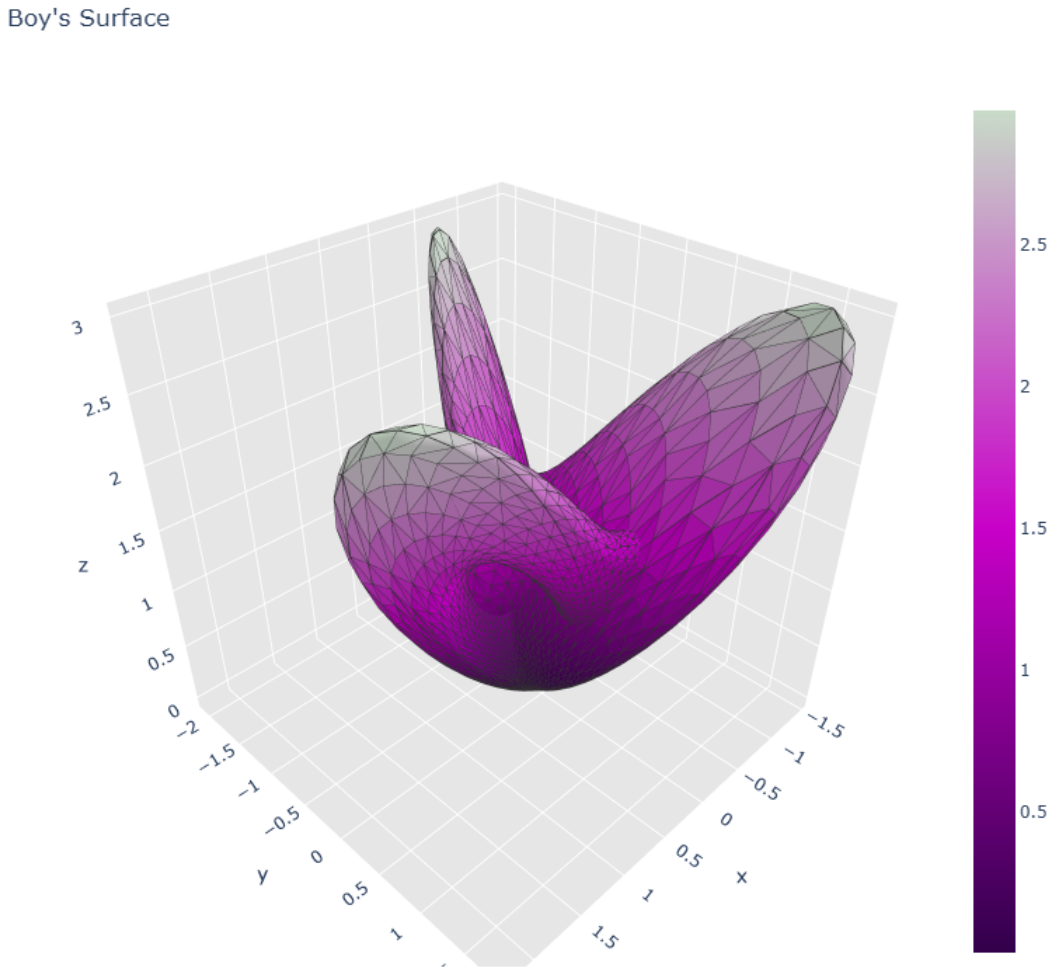

21.1.6 Overlaid function

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06_Plotly3D_OverlaidFunctions.py, and the XML code in the file D06_Plotly3D_OverlaidFunctions.2D.xml.

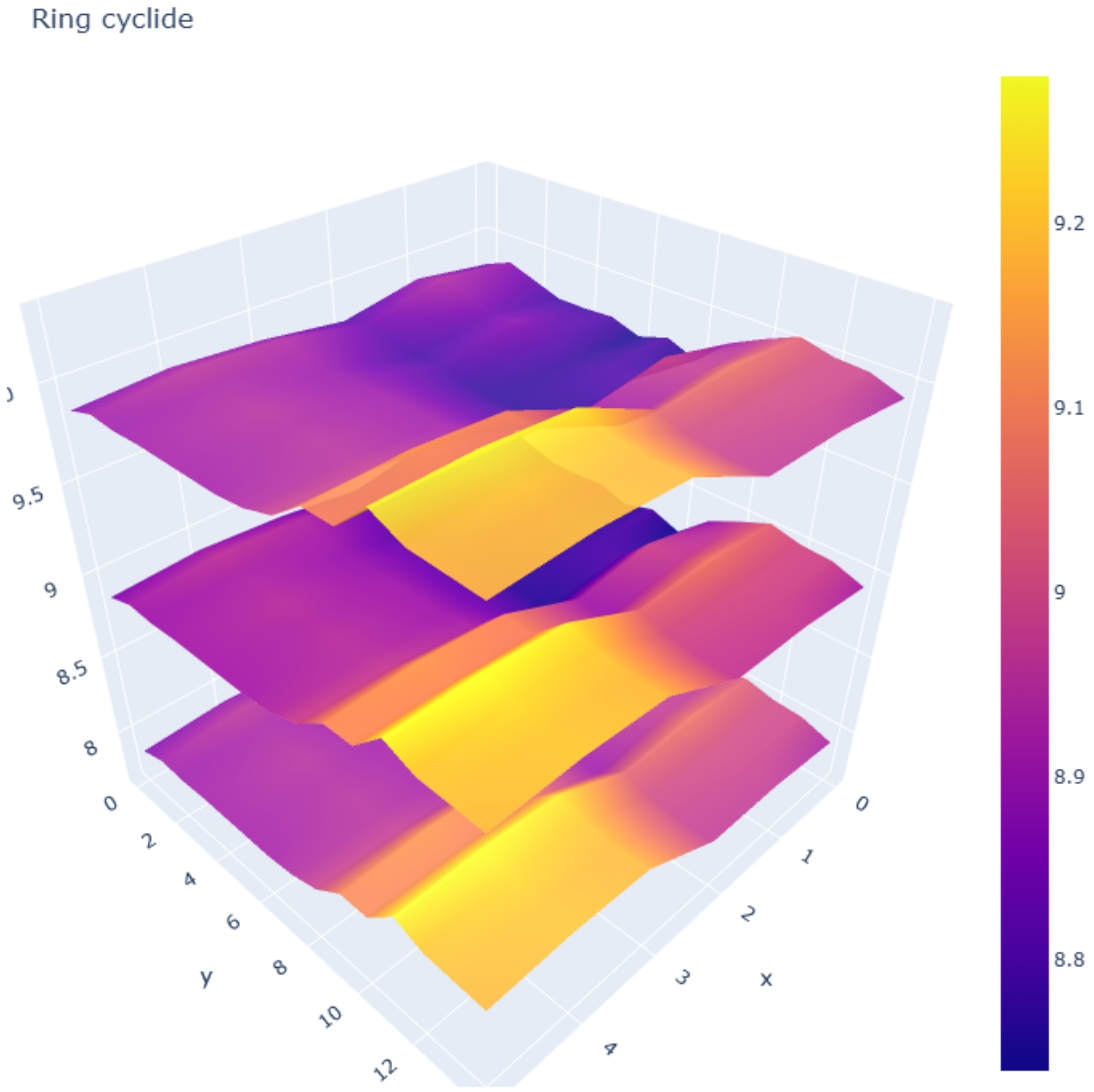

21.1.7 Iris data

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07_Plotly3D_IrisData.py, and the XML code in the file D07_Plotly3D_IrisData.2D.xml.

21.2 Geographical plots

See Test2DFunctions

21.2.1 Movable projection of the world

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_PlotlyGeo_MovableProjection.py, and the XML code in the file D01_PlotlyGeo_MovableProjection.2D.xml.

21.2.2 Rotatable globe

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02_PlotlyGeo_MovableGlobe.py, and the XML code in the file D02_PlotlyGeo_MovableGlobe.2D.xml.

21.2.3 Choropleth of the US with Alaska and Hawai

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03_PlotlyGeo_USA_Agriculture.py, and the XML code in the file D03_PlotlyGeo_USA_Agriculture.2D.xml.

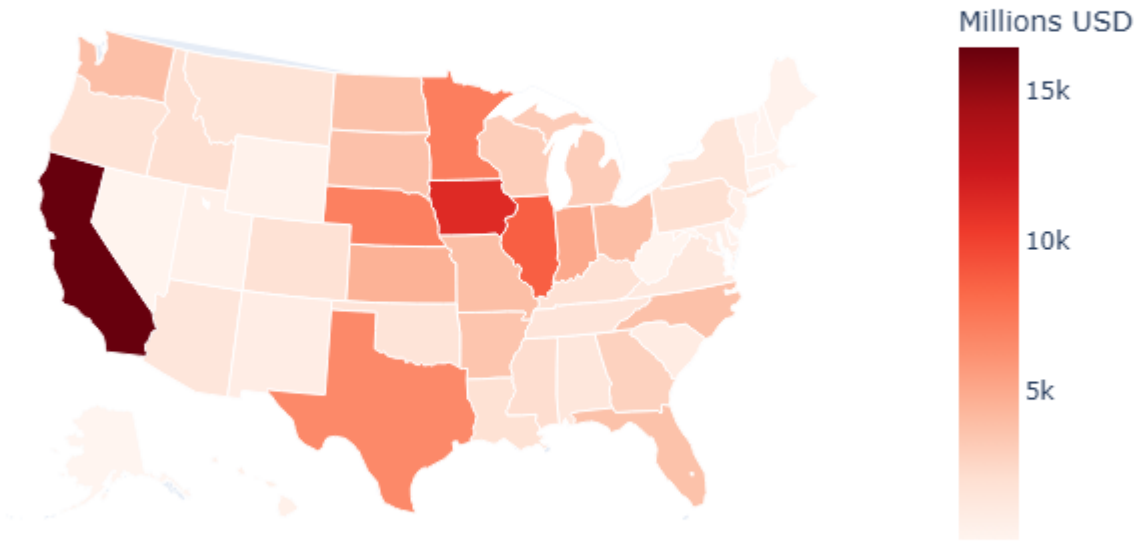

21.2.4 Voting results embedded in map

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04_PlotlyGeo_MontrealVotingWithMap.py, and the XML code in the file D04_PlotlyGeo_MontrealVotingWithMap.2D.xml.

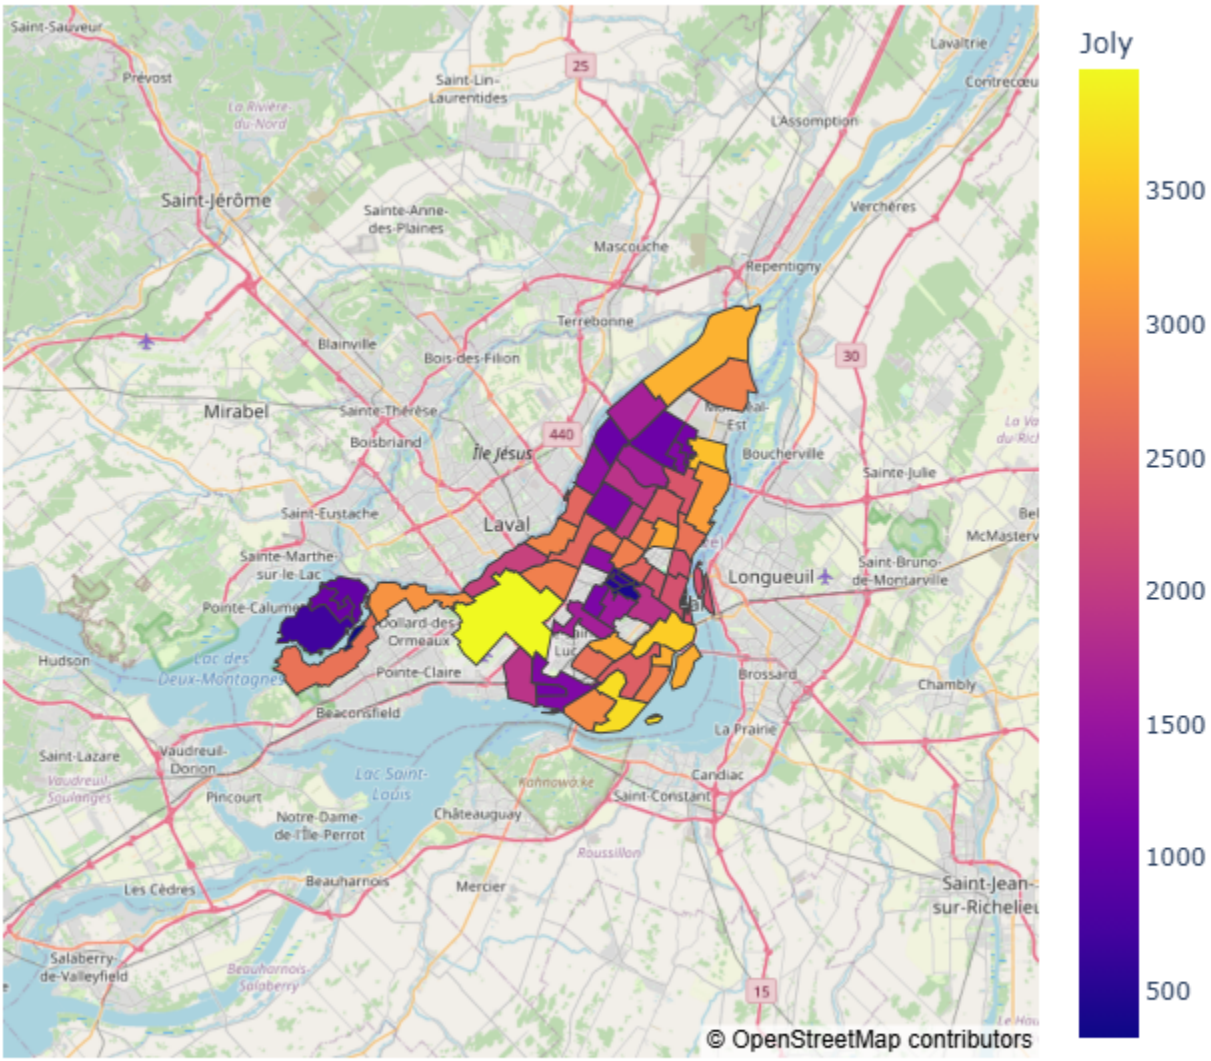

21.3 Sankey plots

21.3.1 Sankey plot 1

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01_PlotlySankey.py, and the XML code in the file D01_PlotlySankey.2D.xml.

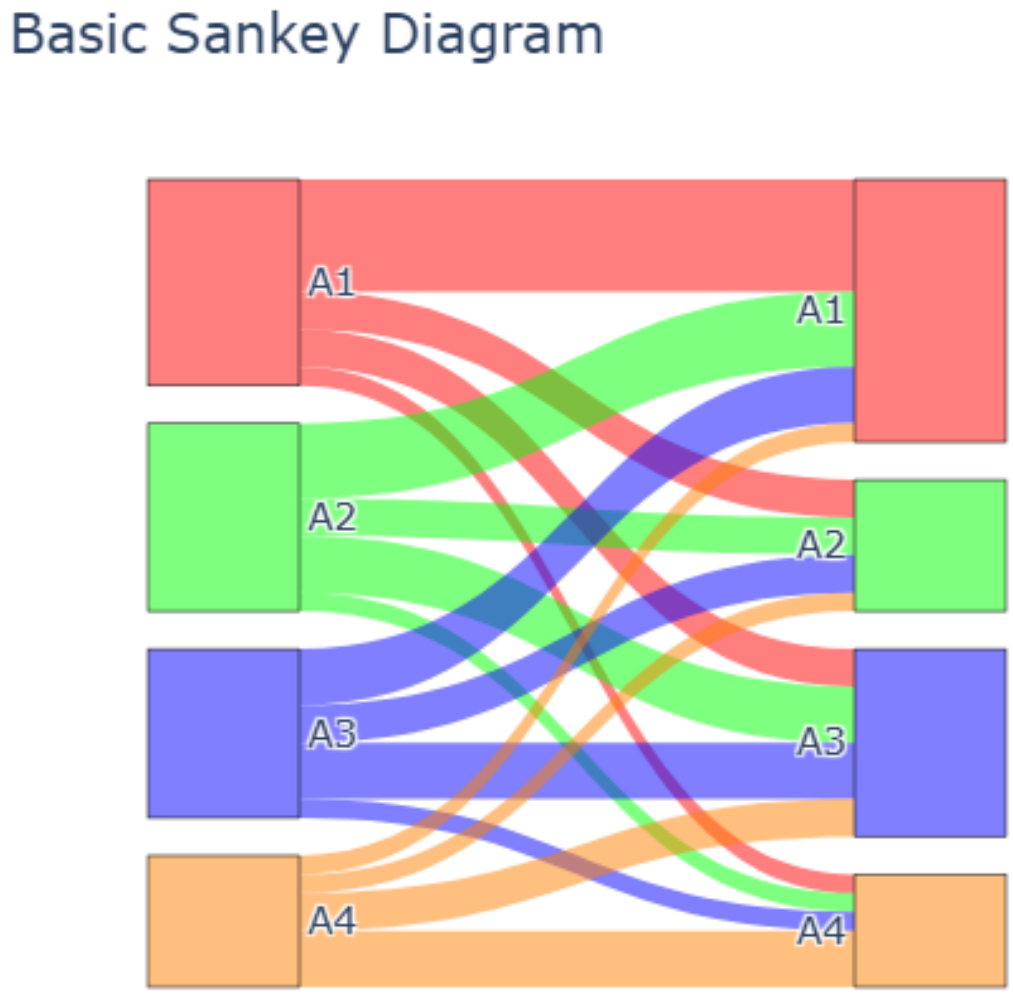

21.3.2 Sankey plot 2

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02_PlotlySankey.py, and the XML code in the file D02_PlotlySankey.2D.xml.

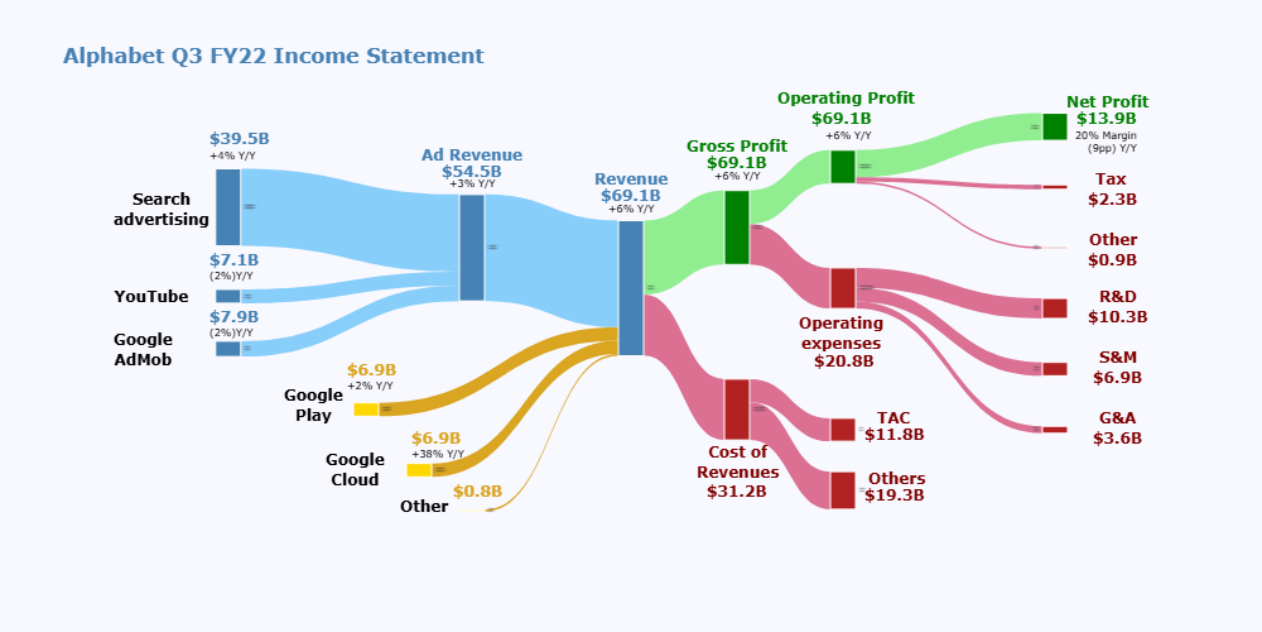

21.3.3 Sankey plot 3

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03_PlotlySankey.py, and the XML code in the file D03_PlotlySankey.2D.xml.

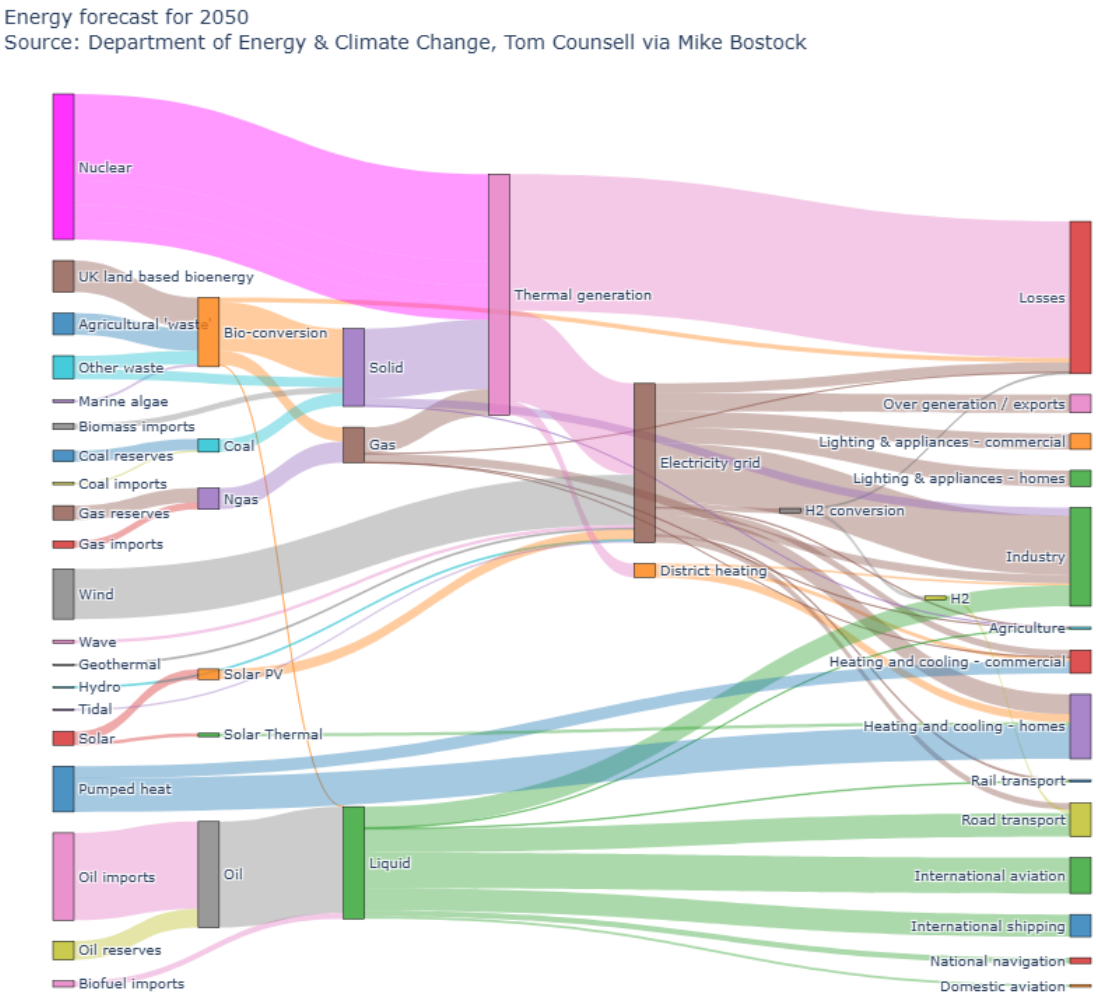

Part V

Interactive 3D Wpf Plots

CHAPTER

TWENTYTWO

WPF: ALTITUDE SURFACES IN 3D, REAL AND COMPLEX FUNCTIONS

Explicit Surfaces: $z = f(x, y)$

22.1 Special techniques for height surfaces, real and complex functions

22.1.1 Wpf figures as standard display of complex functions

This is a description of the standard display of complex functions, using the square function as an example:

The figures below are showing the real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex function $z = \mathrm{sqr}(x + iy)$ with $-2 \leq x \leq 2$ (blue axis), $-2 \leq y \leq 2$ (red axis), $-10 \leq z \leq 10$ (green axis).

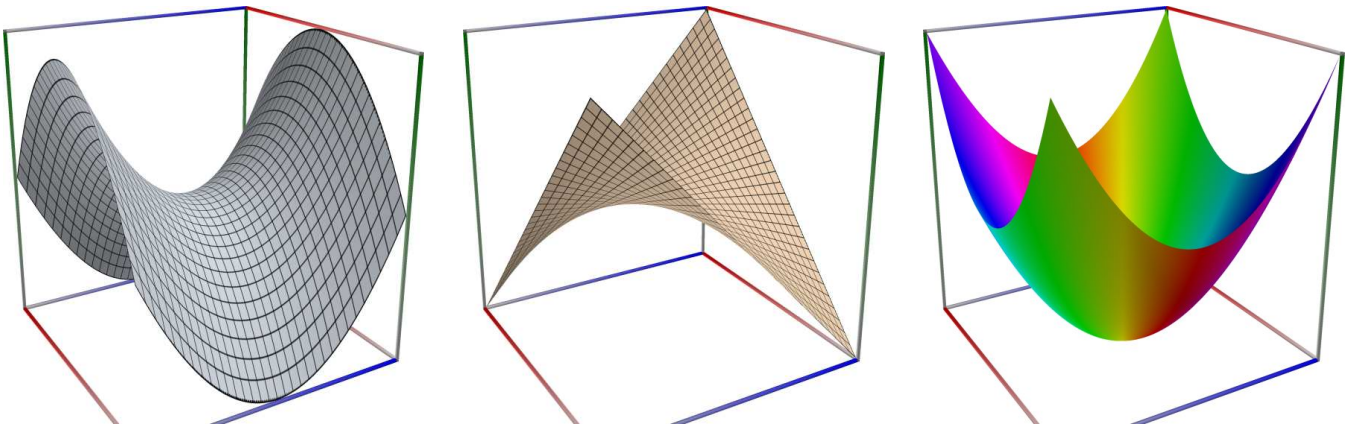

Note

Although the range of the green axis is stated in the form $z_{\min} \leq z \leq z_{\max}$, with $z_{\min} \neq 0$ in general, this applies only for the figures showing the real and imaginary part. For the figure showing the absolute value we have always $z_{\min} = 0$. This note is omitted from the standard text describing complex functions in this manual for better readability.

22.1.2 Truncation vs loglog transformation

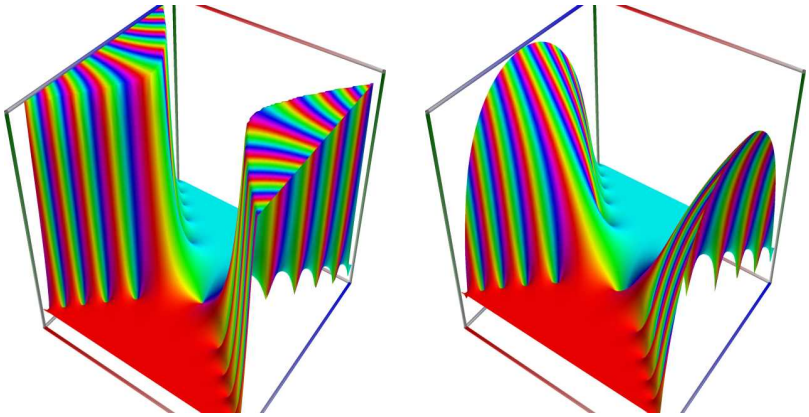

3D wpf plot: Surface plot without cutting of the branch cut (left figure), Surface plot with cutting of the branch cut (right figure)

22.1.3 Displaying branch cuts

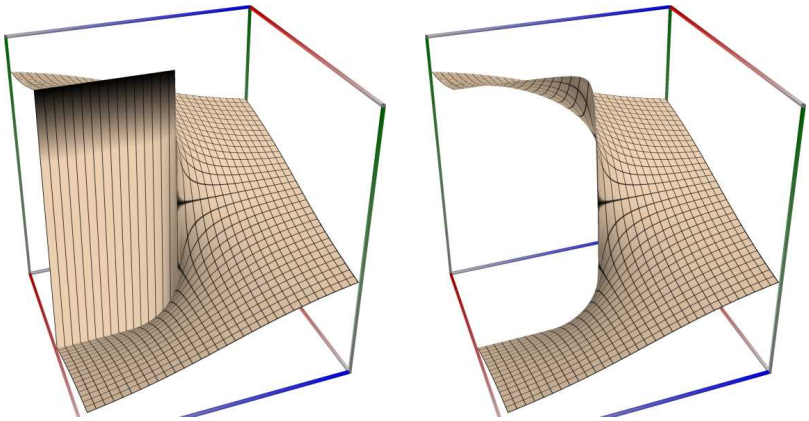

3D wpf plot: Surface plot without cutting of the branch cut (left figure). Surface plot with cutting of the branch cut (right figure).

22.2 Scatterplots and building 3D scenes

22.2.1 Scatter plot of bivariate normal

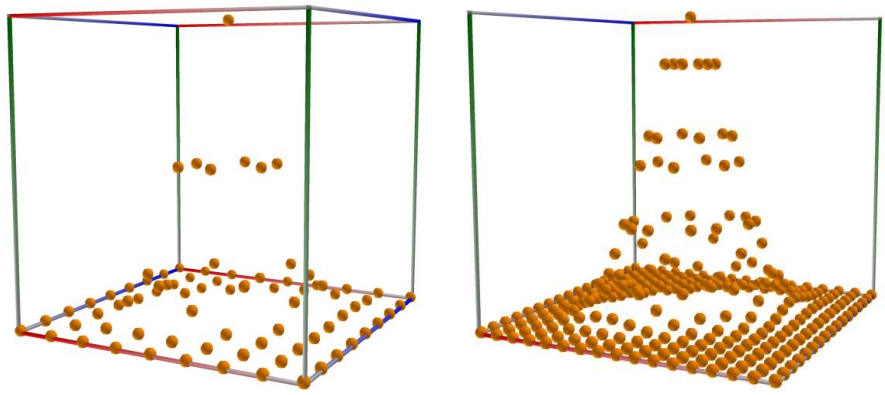

22.2.2 Scatter plot of surfaces

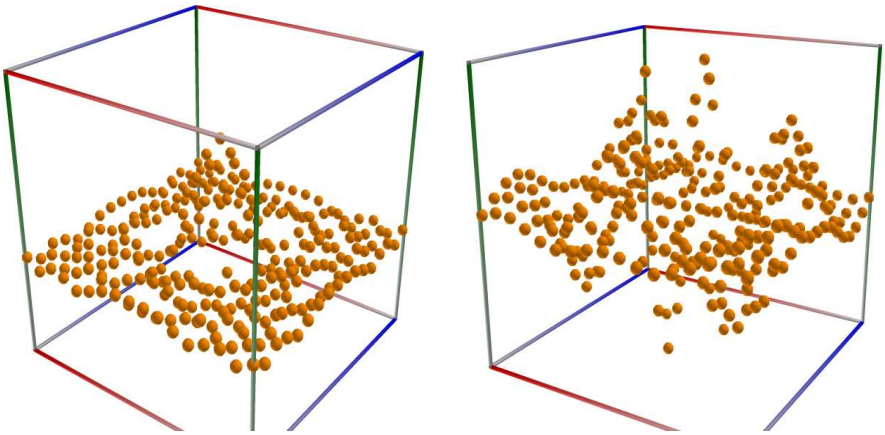

22.3 Height plots of general bivariate real functions

22.3.1 Hyperbolic paraboloid

`User.`**`HyperbolicParaboloid`**`(`*a*, *Resolution*`)`

See also: https://mathworld.wolfram.com/HyperbolicParaboloid.html

References

Gray, A. "The Hyperbolic Paraboloid." Modern Differential Geometry of Curves and Surfaces with Mathematica, 2nd ed. Boca Raton, FL: CRC Press, pp. 297-298 and 449, 1997.

22.3.2 Array Surface, general

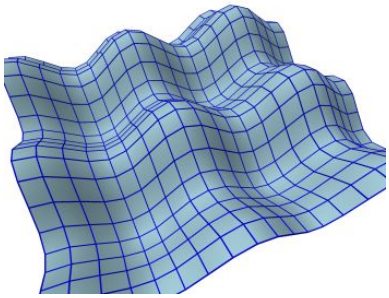

22.3.3 Fractal Landscape surface

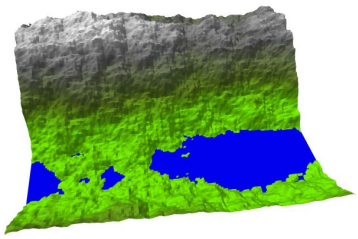

22.3.4 Sombrero function

See also: https://en.m.wikipedia.org/wiki/File:Sombrero_function_3d.png

See also: https://mathworld.wolfram.com/JincFunction.html

See also: https://en.wikipedia.org/wiki/Sombrero_function

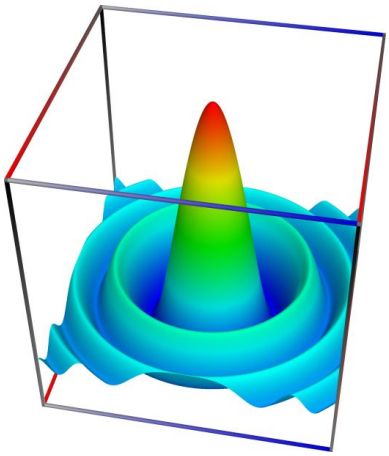

22.3.5 General 3D Wave function

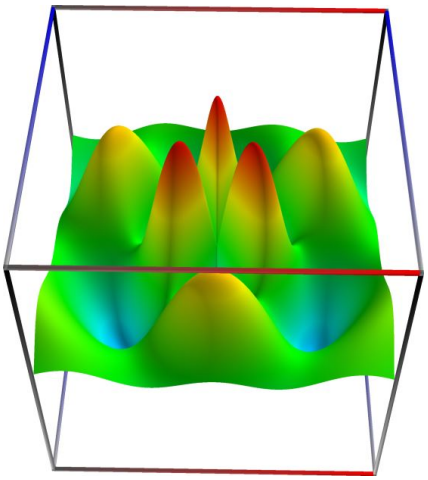

22.3.6 Bivariate normal function

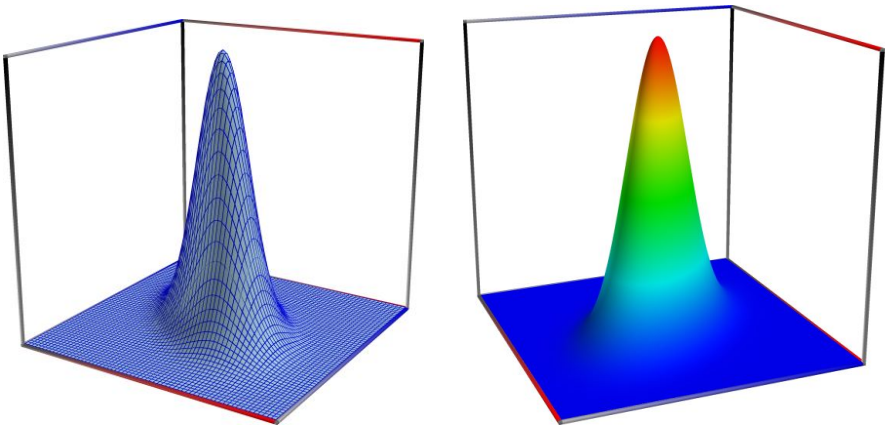

CHAPTER

TWENTYTHREE

WPF: PARAMETRIC SURFACES

23.1 Surfaces of translation

See also: https://en.wikipedia.org/wiki/Translation_surface_(differential_geometry)

See also:http://www.3d-meier.de/tut3/Seite0.html

See also: https://en.wikipedia.org/wiki/Implicit_surface

23.1.1 Fermat spiral as generator

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01a_FermatSpiral.3D.xml (D01a-c).

The example below uses the following code in C#

```
var h = 2;
var x = 4*Math.Sqrt(u) * Math.Cos(u);
var y = 4*Math.Sqrt(u) * Math.Sin(u);
var z = h * v;
```

See also Wikipedia [1359], MathWorld [1063].

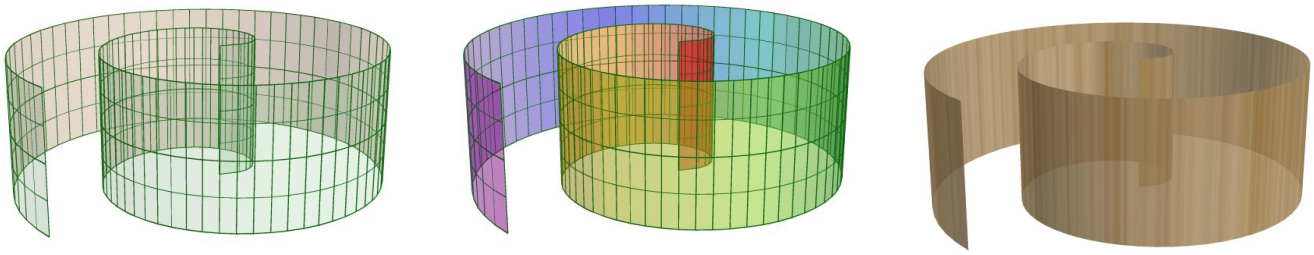

23.1.2 Lemniscate as generator

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D02a_Lemniscate.3D.xml (D02a-c).

The example below uses the following code in C#

```
double a = 0.3;
double c = 1.0;
double r = c * 0.5;
var x = r * (Math.Cos(u) / (1 + Math.Sin(u) * Math.Sin(u)));
var y = r * (Math.Sin(u) * Math.Cos(u) / (1 + Math.Sin(u) * Math.Sin(u)));
var z = a * v;
```

// see also: http://www.3d-meier.de/tut3/Seite152.html

See also Wikipedia [1359], MathWorld [1063].

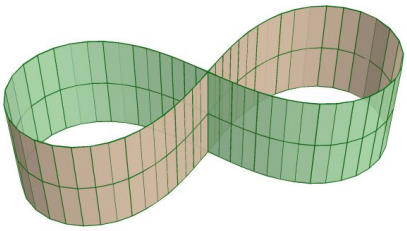
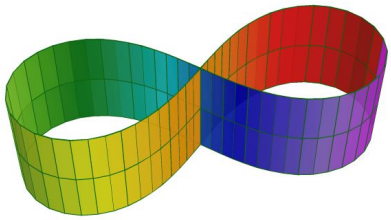
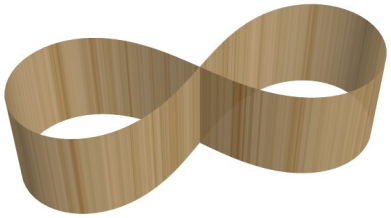

23.1.3 Tanh spiral as generator

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D03a_TanhSpiral.3D.xml (D03a-c).

The example below uses the following code in C#

```
var h = 0.5;
double c = 0.2;
double a = 6.0;
var x = c * (Math.Sinh(2 * u) / (Math.Cos(2 * a * u) + Math.Cosh(2 * u)));
var y = c * (Math.Sin(2 * a * u) / (Math.Cos(2 * a * u) + Math.Cosh(2 * u)));
var z = h * v;
```

// see http://www.3d-meier.de/tut3/Seite187.html // see Krivoshapko, p. 498

See also Wikipedia [1359], MathWorld [1063].

See also Wikipedia [1359], MathWorld [1063].

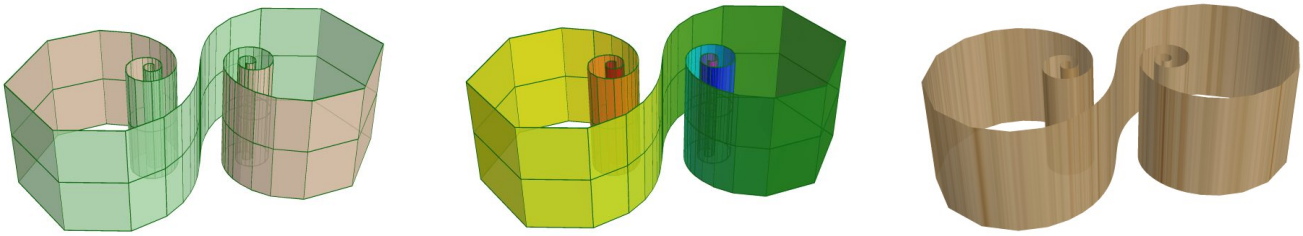

23.1.4 Rose curve as generator

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D04a_RoseCurve.3D.xml (D04a-c).

The example below uses the following code in C#

```
double a = 0.6;
double h = 2.0;
double n = 3.0;
double ca = Math.Cos(a);

var x = (h * Math.Abs(Math.Cos(n * u)) * ca) * Math.Cos(u);
var y = (h * Math.Abs(Math.Cos(n * u)) * ca) * Math.Sin(u);
var z = a * v;
```

// see http://www.3d-meier.de/tut3/Seite189.html

See also Wikipedia [1359], MathWorld [1063].

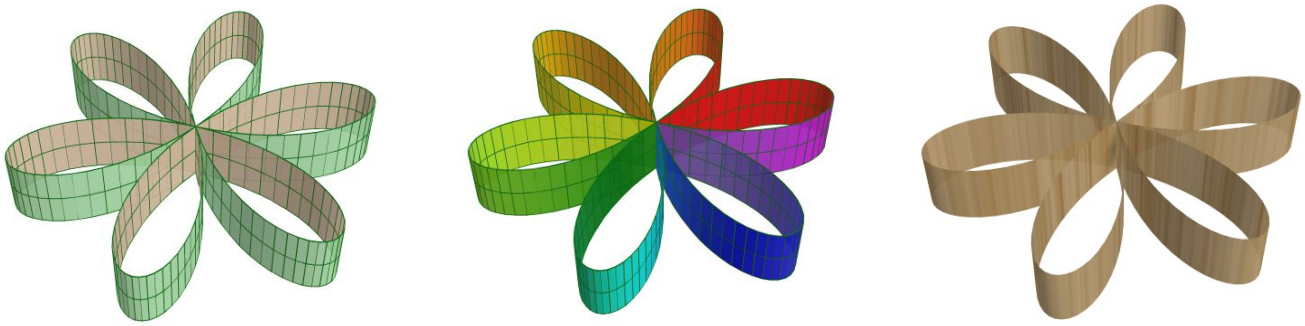

23.1.5 Hypocycloid as generator

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D05a_Hypocycloid_55.3D.xml (D05a-c).

The example below uses the following code in C#

```
double a = 3.7;
double r = 1.5;
double k = 5.5;
var x = r * (k - 1) * Math.Cos(u) + r * Math.Cos((k - 1) * u);
var y = r * (k - 1) * Math.Sin(u) - r * Math.Sin((k - 1) * u);
var z = a * v;
```

// see http://www.3d-meier.de/tut3/Seite189.html

See also Wikipedia [1359], MathWorld [1063].

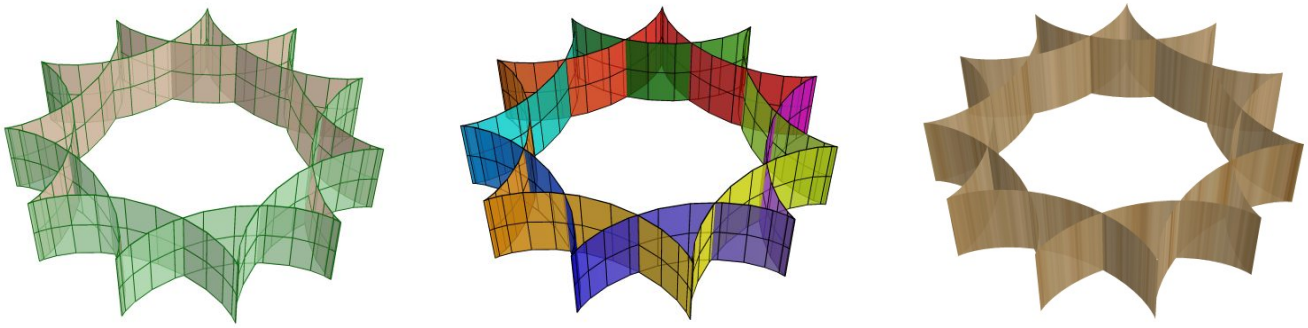

23.1.6 Epicycloid as generator

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D06a_Epicycloid_55.3D.xml (D06a-c).

The example below uses the following code in C#

```
double a = 2.0;
double r = 1.0;
double k = 5.5;
var h = 1.5;
var x = r * (k + 1) * Math.Cos(u) - h * r * Math.Cos((k + 1) * u);
var y = r * (k + 1) * Math.Sin(u) - h * r * Math.Sin((k + 1) * u);
var z = a * v;
```

// see http://www.3d-meier.de/tut3/Seite189.html

See also Wikipedia [1359], MathWorld [1063].

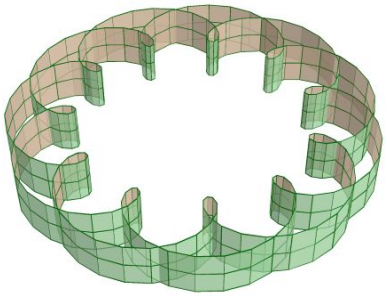
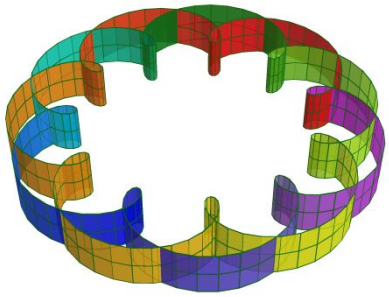

23.2 Surfaces of revolution

See also: https://mathworld.wolfram.com/SurfaceofRevolution.html

A surface of revolution is a surface generated by rotating a two-dimensional curve about an axis. The resulting surface therefore always has azimuthal symmetry. Examples of surfaces of revolution include the apple surface, cone (excluding the base), conical frustum (excluding the ends), cylinder (excluding the ends), Darwin-de Sitter spheroid, Gabriel's horn, hyperboloid, lemon surface, oblate spheroid, paraboloid, prolate spheroid, pseudosphere, sphere, spheroid, and torus (and its generalization, the toroid).

The standard parameterization of a surface of revolution is given by

$$x(u, v) = \phi(v)\cos(u)$$

$$y(u, v) = \phi(v)\sin(u)$$

$$z(u, v) = \psi(v)$$

23.2.1 One-Sheeted Hyperboloid

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D01a_Hyperboloid1.3D.xml (D01a-c).

The example below uses the following code in C#

```
var a = 1;
var c = 1;
var b = Math.Sqrt(1 + u * u);
var x = a * b * Math.Sin(v);
var y = a * b * Math.Cos(v);
var z = c * u;
```

See also: https://mathworld.wolfram.com/One-SheetedHyperboloid.html

See also: https://en.wikipedia.org/wiki/Hyperboloid

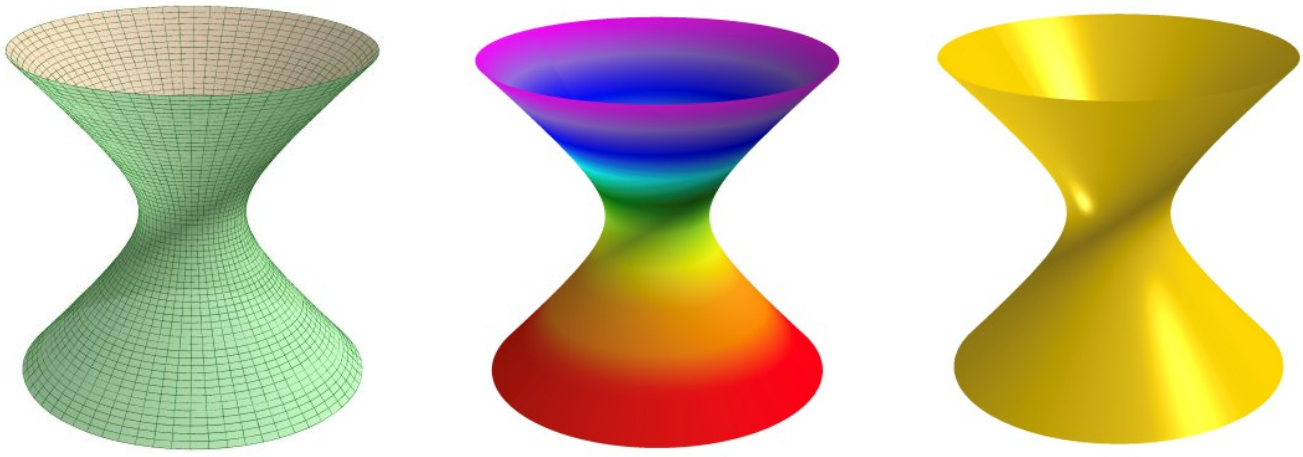

23.2.2 Sphere

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D02a_SphereSqrt.3D.xml (D02a-f).

The example below uses the following code in C#

```
var y = Math.Sqrt(1-u*u) * Math.Cos(v);
var x = Math.Sqrt(1-u*u) * Math.Sin(v);
var z =  u;
```

See also: http://www.3d-meier.de/tut3/Seite86.html, Sphere

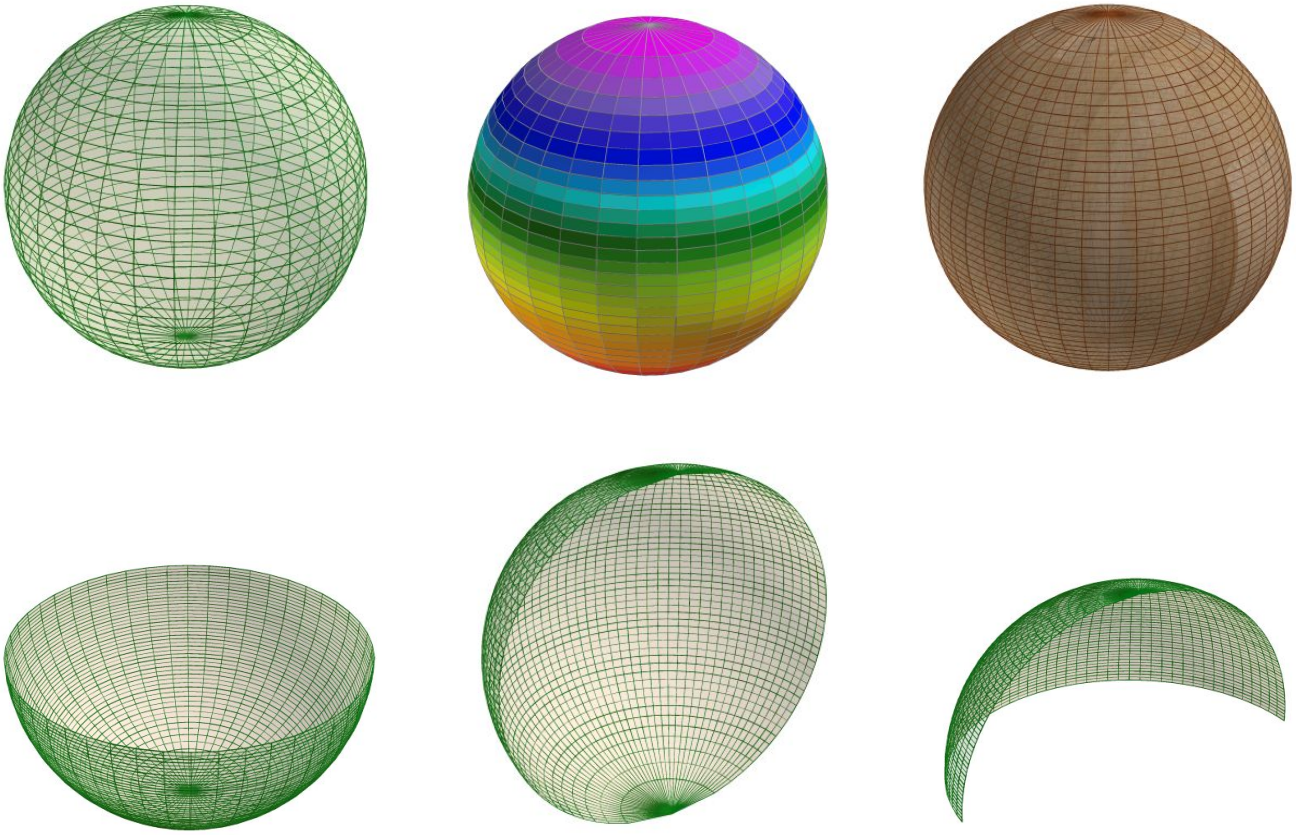

23.2.3 Prolate Spheroid

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D03a_ProlateSpheroidoid.3D.xml (D03a-c).

The example below uses the following code in C#

```
var a = 1;
var b = 1;
var c = 2;
var x = b * Math.Sqrt(1-u*u) * Math.Sin(v);
var y = a * Math.Sqrt(1-u*u) * Math.Cos(v);
var z =  c * u;
```

See also: http://paulbourke.net/geometry/spherical/ prolate spheroid, or ellipsoid of revolution See also: https://en.wikipedia.org/wiki/Ellipsoid#Parameterization ellipsoid of revolution See also: https://mathworld.wolfram.com/OblateSpheroid.html Oblate Spheroid

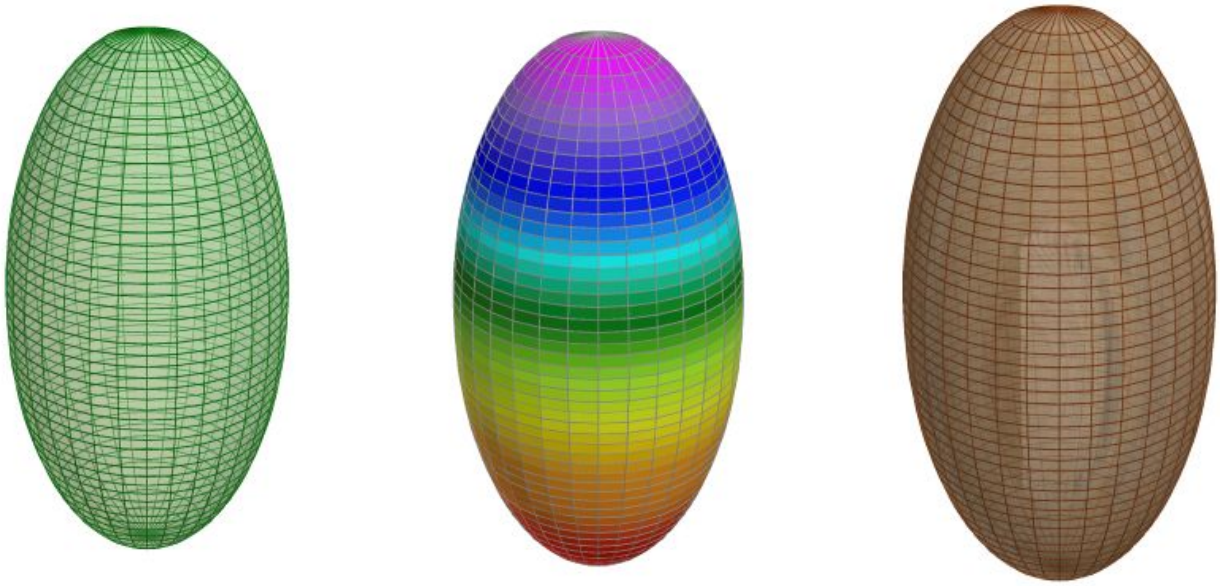

23.2.4 Oblate Spheroid

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D04a_OblateSpheroidoid.3D.xml (D04a-c).

The example below uses the following code in C#

```
var a = 2;
var b = 2;
var c = 1;
var x = b * Math.Sqrt(1-u*u) * Math.Sin(v);
var y = a * Math.Sqrt(1-u*u) * Math.Cos(v);
var z =  c * u;
```

See also: http://paulbourke.net/geometry/spherical/ prolate spheroid, or ellipsoid of revolution See also: https://en.wikipedia.org/wiki/Ellipsoid#Parameterization ellipsoid of revolution See also: https://mathworld.wolfram.com/OblateSpheroid.html Oblate Spheroid

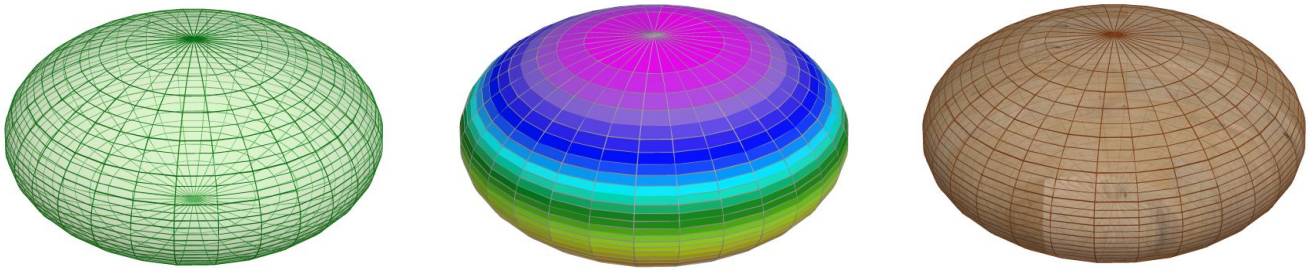

23.2.5 Drop surface

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D05a_DropSurface.3D.xml (D05a-c).

The example below uses the following code in C#

```
double a = 0.5;  //(0 to 1)
double b = 1.00;  //(0 to 1)
var x = a * (b - Math.Cos(u)) * Math.Sin(u) * Math.Cos(v);
var y = a * (b - Math.Cos(u)) * Math.Sin(u) * Math.Sin(v);
var z = Math.Cos(u);
```

// see http://www.3d-meier.de/tut3/Seite44.html

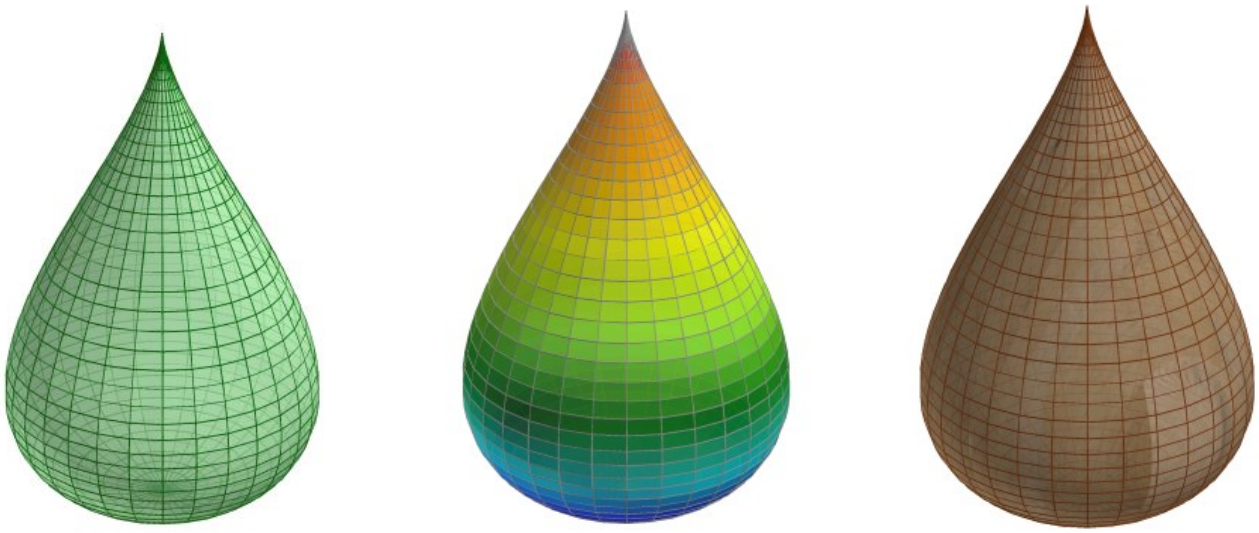

23.2.6 Egg surface

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D06a_EggSurface.3D.xml (D06a-c).

The example below uses the following code in C#

```
double a = 2.0;  //(0 to 1)
double b = 0.75;  //(0 to 1)
var x = Math.Sqrt(0.75 * u * (2 * a - u) * (1 - (a * a * b * b) / ((u + a) * (u + a)))) * Math.Sin(v);
var y = Math.Sqrt(0.75 * u * (2 * a - u) * (1 - (a * a * b * b) / ((u + a) * (u + a)))) * Math.Cos(v);
var z = u;
```

For the egg surface, also see Meier

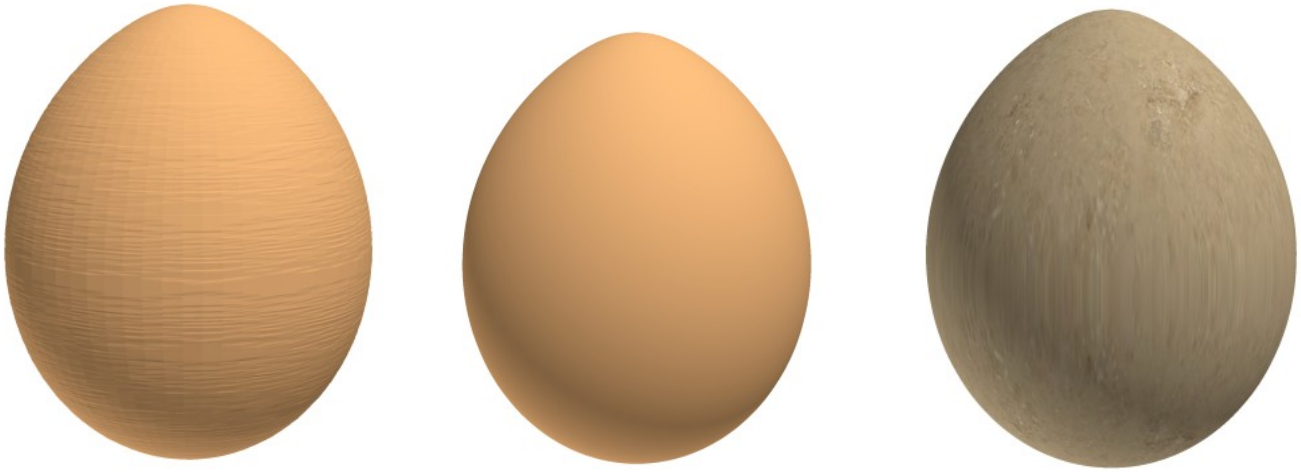

23.2.7 Apple surface

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D07a_Apple.3D.xml (D07a-c).

The example below uses the following code in C#

```
var x =  Math.Cos(u) * (4 + 3.8 * Math.Cos(v));
var y =  Math.Sin(u) * (4 + 3.8 * Math.Cos(v));
var z = (Math.Cos(v) + Math.Sin(v) - 1) * (1 + Math.Sin(v)) * Math.Log(1 - Math.PI * v / 10) + 7.5 * Math.Sin(v);
```

// see http://www.3d-meier.de/tut3/Seite54.html

For the apple surface, also see Meier

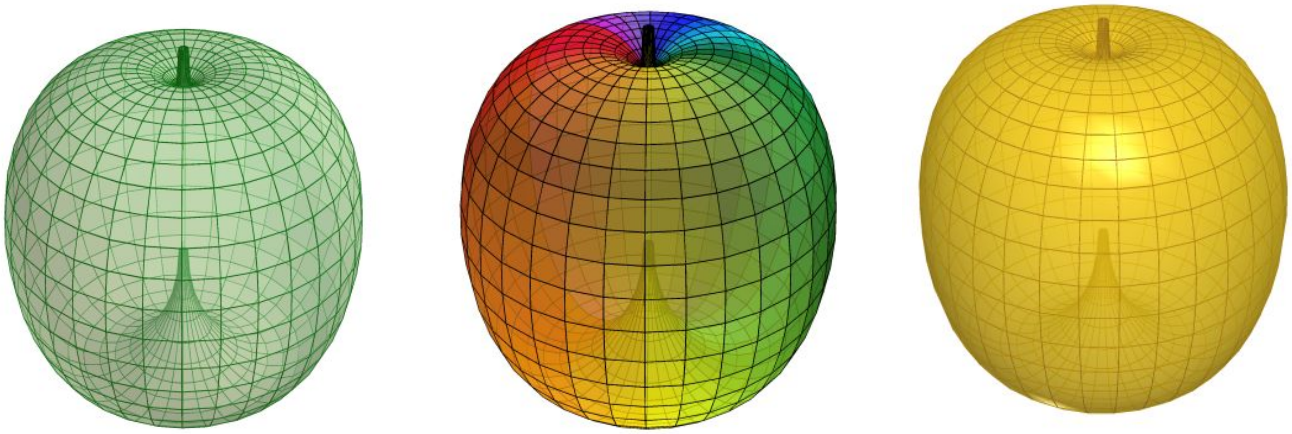

23.2.8 Spinning top

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D08a_Spinningtop.3D.xml (D08a-c).

The example below uses the following code in C#

```
var x = (Math.Abs(u) - 1) * (Math.Abs(u) - 1) * Math.Sin(v);
var y = (Math.Abs(u) - 1) * (Math.Abs(u) - 1) * Math.Cos(v);
var z = u;
```

See also http://www.3d-meier.de/tut3/Seite150.html Kreisel

See also Wikipedia [1359], MathWorld [1063].

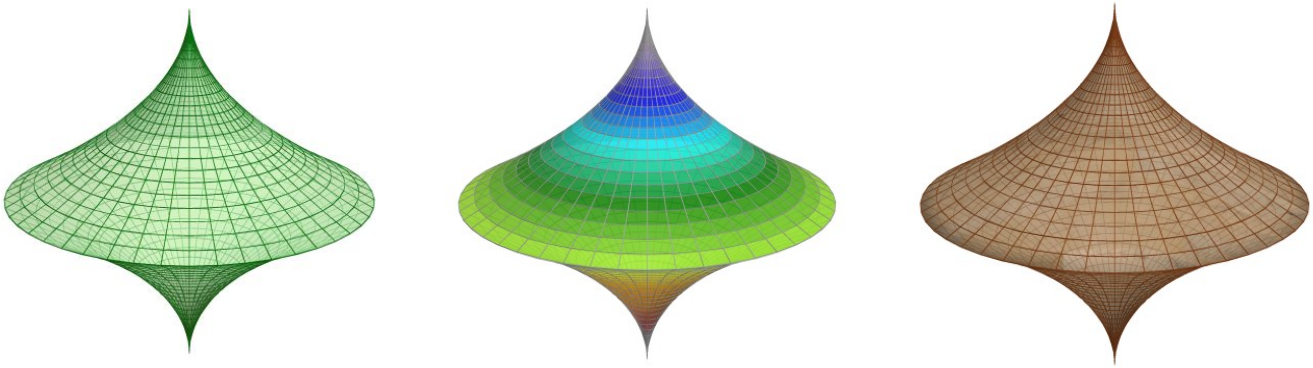

23.2.9 Pseudosphere

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D09a_PseudoSphere.3D.xml (D09a-c).

The example below uses the following code in C#

```
var x = Math.Cos(u) * Math.Sin(v);
var y = Math.Sin(u) * Math.Sin(v);
var z = (Math.Cos(v) + Math.Log(Math.Tan(0.5 * v)));
```

See also: https://mathworld.wolfram.com/Pseudosphere.html

// see http://www.3d-meier.de/tut3/Seite28.html

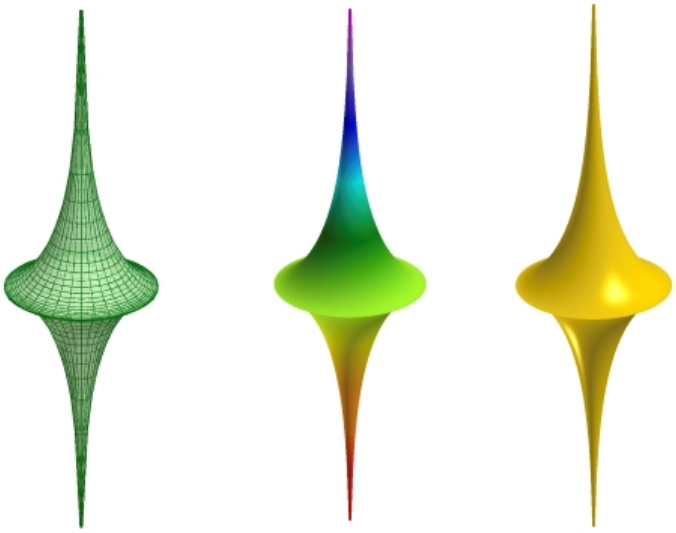

23.2.10 Wave sphere Surface

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D10a_WaveSphere.3D.xml (D10a-b).

The example below uses the following code in C#

```
var x = u * Math.Cos(Math.Cos(u)) * Math.Cos(v);
var y = u * Math.Cos(Math.Cos(u)) * Math.Sin(v);
var z = u * Math.Sin(Math.Cos(u));
```

// see http://www.3d-meier.de/tut3/Seite63.html

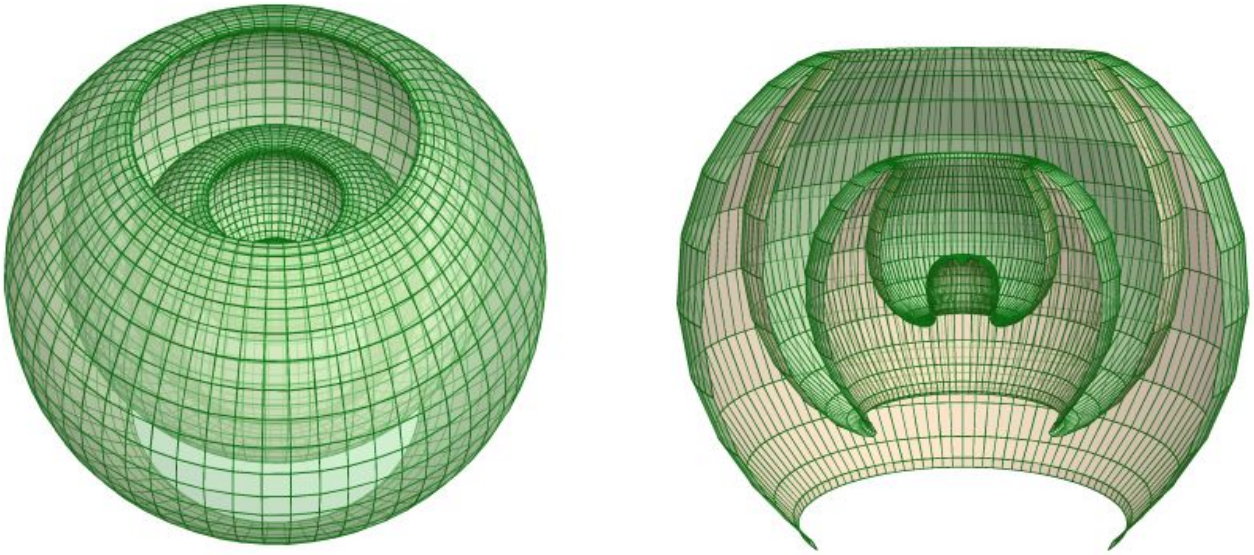

23.2.11 Torus

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D11a_Torus.3D.xml (D11a-c).

The example below uses the following code in C#

```
var R = 1.5;
var r = 0.5;
var x = (R + r * Math.Cos(v)) * Math.Cos(u);
var y = (R + r * Math.Cos(v)) * Math.Sin(u);
var z = r * Math.Sin(v);
```

See also Wikipedia [1359], MathWorld [1063].

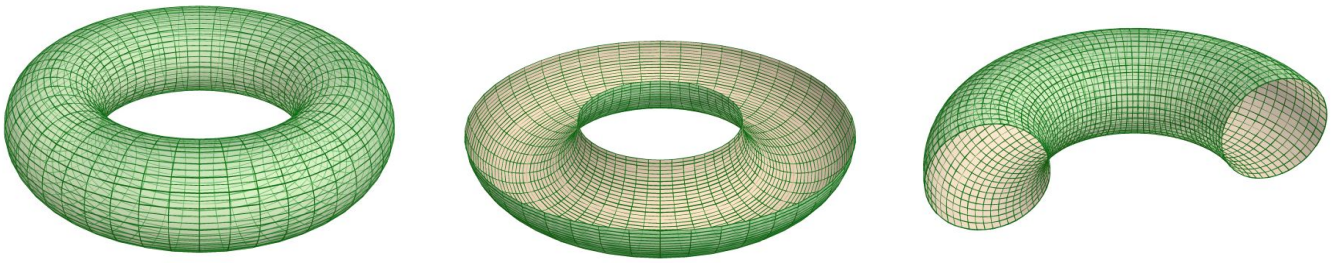

23.2.12 Horn Torus

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D12a_HornTorus.3D.xml (D12a-c).

The example below uses the following code in C#

```
var R = 1.5;
var r = 1.5;
var x = (R + r * Math.Cos(v)) * Math.Cos(u);
var y = (R + r * Math.Cos(v)) * Math.Sin(u);
var z = r * Math.Sin(v);
```

See also Wikipedia [1359], MathWorld [1063].

23.2.13 Spindle Torus

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D13a_SpindelTorus.3D.xml (D13a-c).

The example below uses the following code in C#

```
var R = 1.5;
var r = 2.5;
var x = (R + r * Math.Cos(v)) * Math.Cos(u);
var y = (R + r * Math.Cos(v)) * Math.Sin(u);
var z = r * Math.Sin(v);
```

See also: https://mathworld.wolfram.com/EllipticTorus.html

See also Wikipedia [1359], MathWorld [1063].

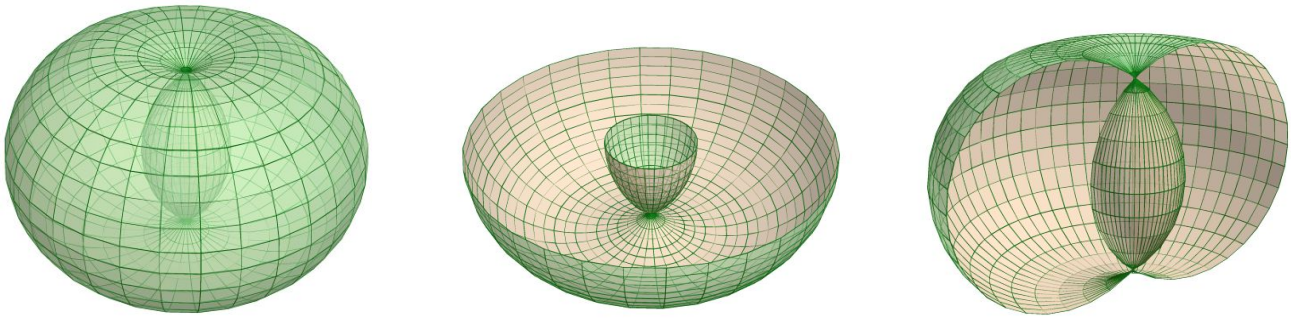

23.2.14 Elliptic Torus

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D14a_EllipticTorus.3D.xml (D14a-c).

The example below uses the following code in C#

```
var a = 0.2;
var b = 0.5;
var c = 1;
var su = Math.Sin(u);
var sv = Math.Sin(v);
var cu = Math.Cos(u);
var cv = Math.Cos(v);

var x = (c + a * cv) * cu;
var y = (c + a * cv) * su;
var z = b * sv;
```

See also: https://mathworld.wolfram.com/EllipticTorus.html

See also Wikipedia [1359], MathWorld [1063].

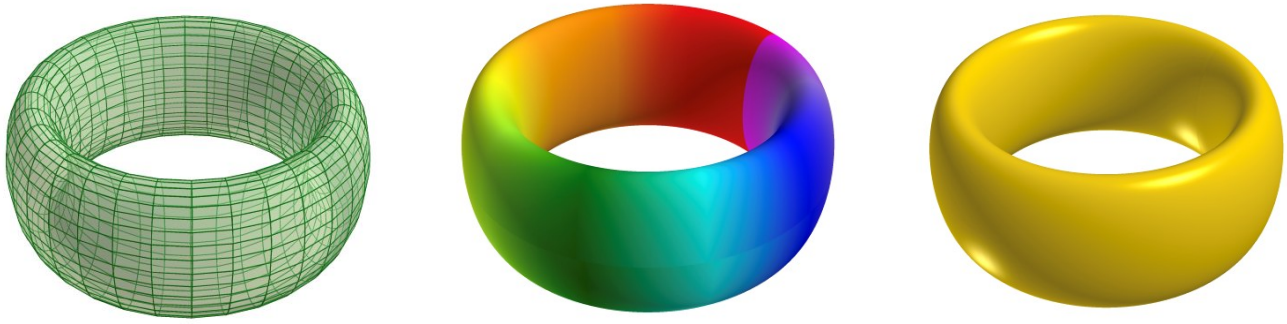

23.3 Generalisations of common surfaces

Parametric Surfaces: $x = f(u, v)$, $y = g(u, v)$, $z = h(u, v)$

23.3.1 Ellipsoid

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D01a_Ellipsoid.3D.xml (D01a-c).

The parametric equations of an ellipsoid can be written as

$$x(u, v) = a\cos(u)\sin(v),$$

$$y(u, v) = b\sin(u)\sin(v),$$

$$z(u, v) = r\sin(t),$$

for $u \in [0, 2\pi)$ and $v \in [0, \pi]$.

See also: http://paulbourke.net/geometry/spherical/ See also: https://mathcurve.com/surfaces.gb/lame/lame.shtml See also: https://mathworld.wolfram.com/Ellipsoid.html

See also Gray *et al.* [351], Krivoshapko and Ivanov [397].

```
var a = 1.0;
var b = 2.0;
var c = 3.0;
var x = a * Math.Cos(u) * Math.Cos(v);
var y = b * Math.Cos(u) * Math.Sin(v);
var z = c * Math.Sin(u);
```

If the lengths of two axes of an ellipsoid are the same, the figure is called an ellipsoid of revolution or spheroid. Denote the equal semi-axes lengths of a spheroid $a = b$, call a the equatorial radius, and call the other semi-axis length the polar radius c. Then if $a > c$, the spheroid is called an oblate spheroid, and if $a < c$, the spheroid is called an prolate spheroid. If all three semi-axes lengths are the same so $a = b = c$, the ellipsoid is a sphere.

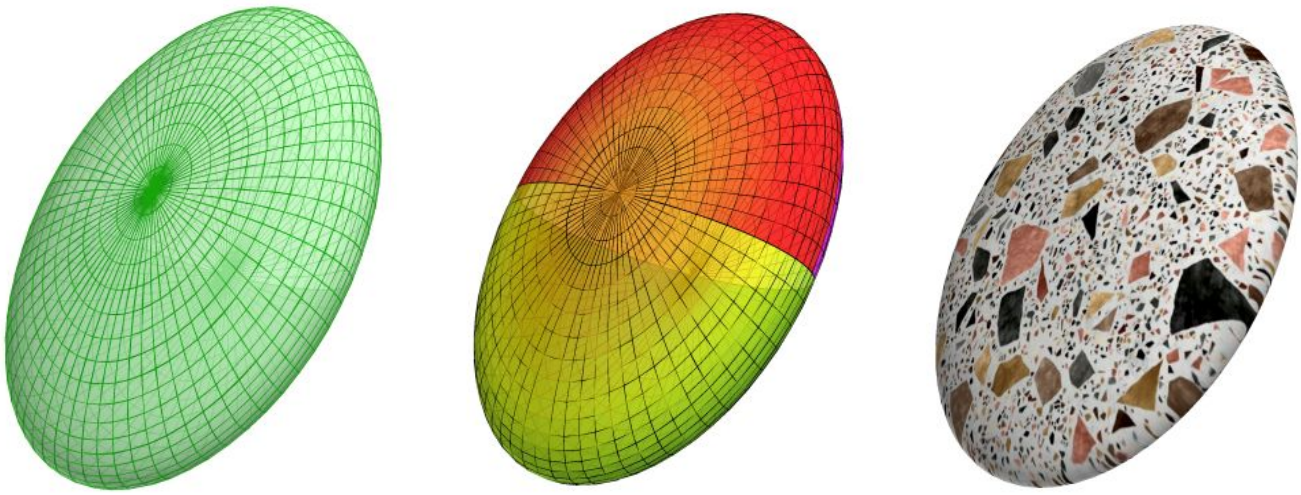

23.3.2 Superellipsoid

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D02a_SuperEllipse.3D.xml (D02a-c).

Superellipsoid is the name given to a family of shapes formed from the spherical product of two superquadratric curves. These shapes can be used to model a wide range of shapes including spheres, cylinders, and parallelepipeds as well as shapes in between. The parametric equations of an superellipsoid can be written as

$$x(u,v) = \text{sgn}(\cos(u)) \cdot |\cos(u)|^{p1} \cdot \text{sgn}(\cos(v)) \cdot |\cos(v)|^{p2},$$

$$y(u,v) = \text{sgn}(\cos(u)) \cdot |\cos(u)|^{p1} \cdot \text{sgn}(\sin(v)) \cdot |\sin(v)|^{p2},$$

$$z(u,v) = \text{sgn}(\sin(u)) \cdot |\sin(u)|^{p1},$$

where $\frac{-\pi}{2} \leq u \leq \frac{\pi}{2}$, $-\pi \leq v \leq \pi$, and $0 < p1, p2 < \infty$.

```
double p1 = 2.0;
double p2 = 3.8;

double u = u;
double v = v;

\cos(u) = Math.Cos(u);
\cos(v) = Math.Cos(v);
\sin(u) = Math.Sin(u);
\sin(v) = Math.Sin(v);

tmp  = Math.Sign(\cos(u)) * Math.Pow(Math.Abs(\cos(u)),p1);
x = tmp * Math.Sign(\cos(v)) * Math.Pow(Math.Abs(\cos(v)),p2);
y = -Math.Sign(\sin(u)) * Math.Pow(Math.Abs(\sin(u)),p1);
z = tmp * Math.Sign(\sin(v)) * Math.Pow(Math.Abs(\sin(v)),p2);
```

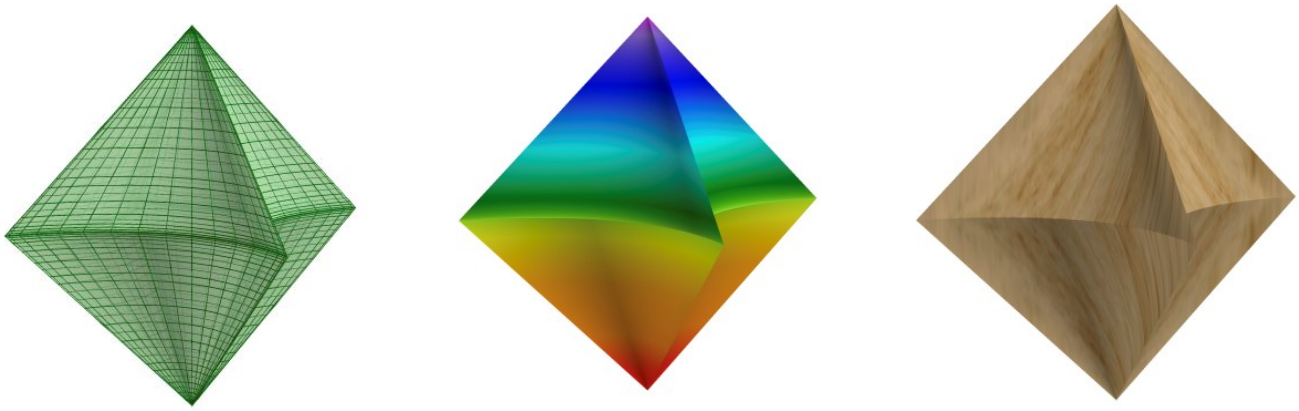

23.3.3 Hexaedron

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D03a_Hexaedron.3D.xml (D03a-c).

See also Wikipedia [1359], MathWorld [1063].

```
double cosu = Math.Cos(u);
double sinu = Math.Sin(u);
double cosv = Math.Cos(v);
double sinv = Math.Sin(v);
x = cosv * cosv * cosv * cosu * cosu * cosu;
y = -sinu * sinu * sinu;
z = sinv * sinv * sinv * cosu * cosu * cosu;
```

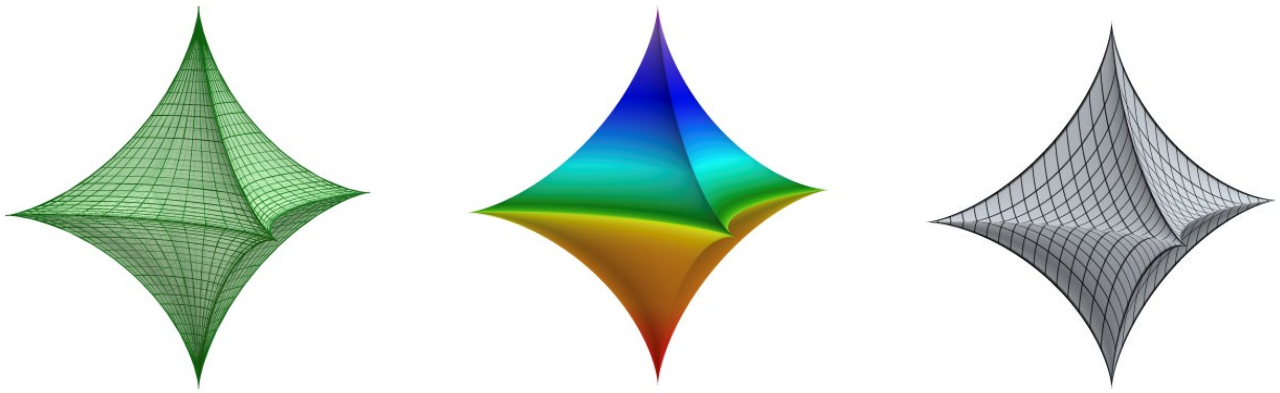

23.3.4 Super Toroid

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D04a_SuperToroid.3D.xml (D04a-c).

See also: http://paulbourke.net/geometry/toroidal/

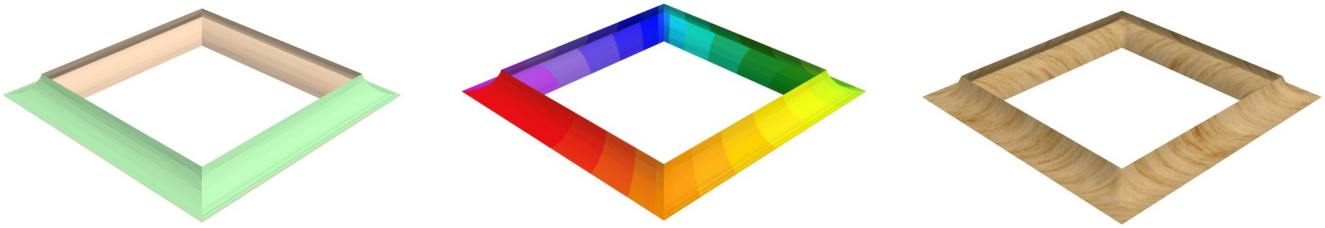

```
double r0 = 1;
double r1 = 0.3;

double tmp;
double ct1,ct2,st1,st2;

double p1 = 2.0;
double p2 = 3.8;
double t1 = u;
double t2 = v;

ct1 = Math.Cos(t1);
ct2 = Math.Cos(t2);
st1 = Math.Sin(t1);
st2 = Math.Sin(t2);

tmp  = r0 + r1 * Math.Sign(ct2) * Math.Pow(Math.Abs(ct2),p2);

x = tmp * Math.Sign(ct1) * Math.Pow(Math.Abs(ct1),p1);
y = -tmp * Math.Sign(st1) * Math.Pow(Math.Abs(st1),p1);
z = r1 * Math.Sign(st2) * Math.Pow(Math.Abs(st2),p2);
```

23.3.5 Elliptic Helicoid

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D05a_EllipticHelicoid.3D.xml (D05a-c).

See also: https://mathworld.wolfram.com/EllipticHelicoid.html

See also Wikipedia [1359], MathWorld [1063].

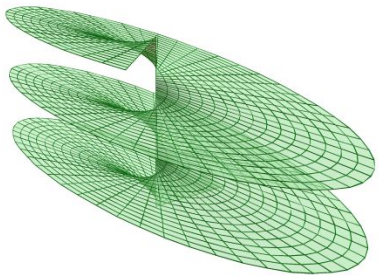
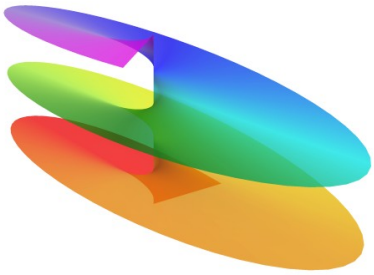
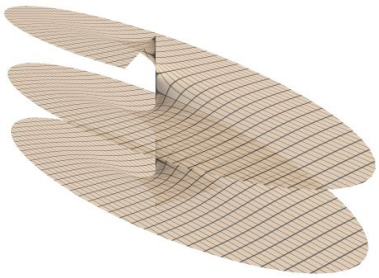

```
double a = 0.5;
double b = 1.5;
double c = 1;
double su = Math.Sin(u);
double cu = Math.Cos(u);

x = a * v * cu;
z = b * v * su;
y = c * u;
```

23.3.6 Hyperbolic Helicoid

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D06a_Hyperhelicoid.3D.xml (D06a-c).

The example below uses the following code in C#

```
var x = (Math.Sinh(v) * Math.Cos(3 * u)) / (1 + Math.Cosh(u) * Math.Cosh(v));
var y = (Math.Sinh(v) * Math.Sin(3 * u)) / (1 + Math.Cosh(u) * Math.Cosh(v));
var z = (Math.Cosh(v) * Math.Sinh(u)) / (1 + Math.Cosh(u) * Math.Cosh(v));
```

See also: https://mathworld.wolfram.com/HyperbolicHelicoid.html

See also Wikipedia [1359], MathWorld [1063].

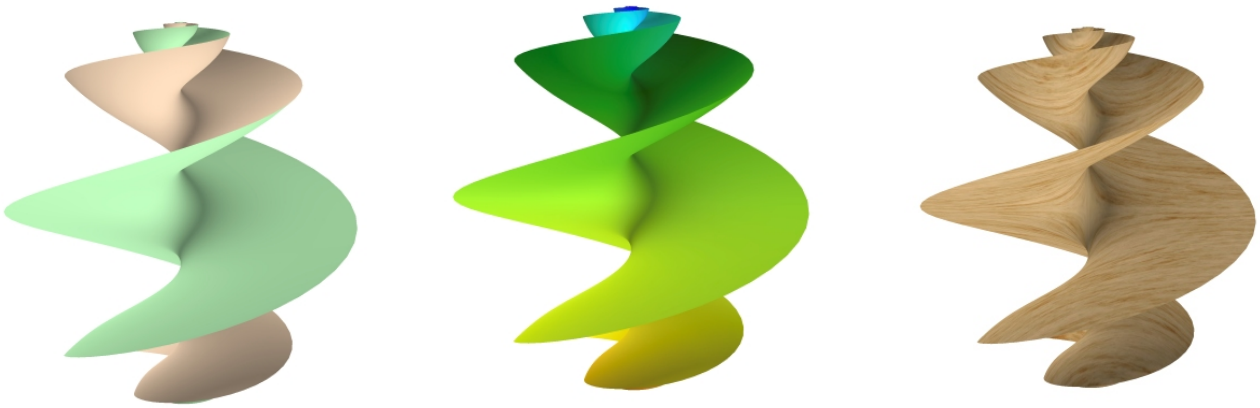

23.3.7 Lemniscate

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D07a_Lemniscate.3D.xml (D07a-c).

See also: http://paulbourke.net/geometry/lemniscape/

```
var x = Math.Cos(v) * Math.Sqrt(Math.Abs(Math.Sin(2 * u))) * Math.Cos(u);
var y = Math.Cos(v) * Math.Sqrt(Math.Abs(Math.Sin(2 * u))) * Math.Sin(u);
var z = x * x - y * y + 2 * x * y * Math.Tan(v) * Math.Tan(v);
```

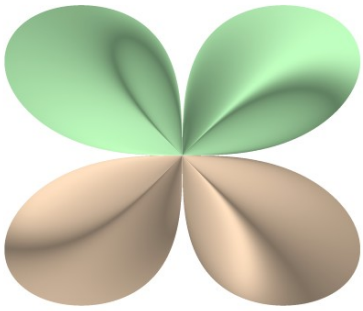
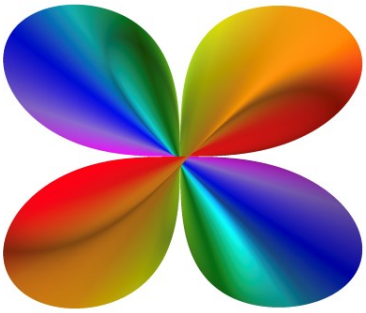
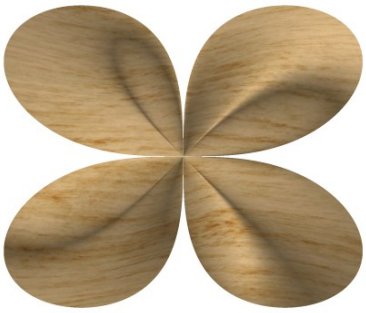

23.3.8 Bohemian Dome

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D08a_BohemianDome.3D.xml (D08a-c).

See also: https://mathworld.wolfram.com/BohemianDome.html

See also Wikipedia [1359], MathWorld [1063].

```
var a = 0.5;
var b = 1.5;
var c = 1;
var su = Math.Sin(u);
var sv = Math.Sin(v);
var cu = Math.Cos(u);
var cv = Math.Cos(v);

var x = a * cu;
var z = b * cv + a * su;
var y = c * sv;
```

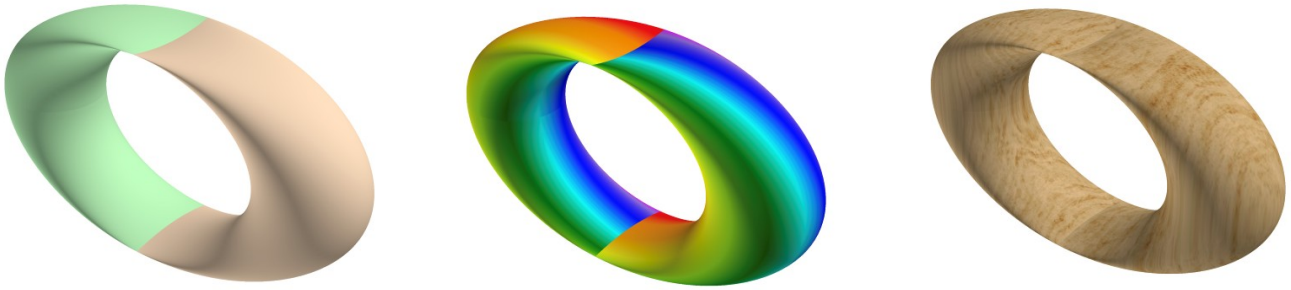

23.3.9 Dupin1 surface

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D09a_Dupin1.3D.xml (D09a-c).

The example below uses the following code in C#

```
var a = 1.5;
var b = 1.4;
var c = Math.Sqrt(a * a - b * b);
var d = b / 2;
var su = Math.Sin(u);
var sv = Math.Sin(v);
var cu = Math.Cos(u);
var cv = Math.Cos(v);
var den = a - c * cu * cv;

var x = (b * sv * (c * cu - d)) / den;
var y = (d * (c - a * cu * cv) + b * b * cu) / den;
var z = (b * su * (a - d * cv)) / den;
```

See also: https://mathcurve.com/surfaces.gb/cyclidedupin/cyclidededupin.shtml

See also: https://en.wikipedia.org/wiki/Dupin_cyclide#Elliptic_cyclides

See also Wikipedia [1359], MathWorld [1063].

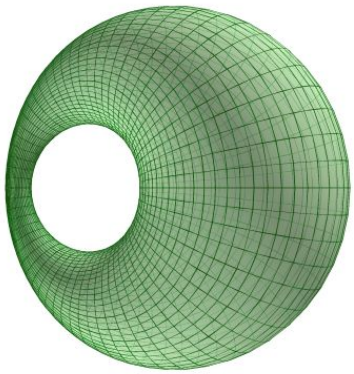

23.3.10 Dupin2 surface

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D10a_Dupin2.3D.xml (D10a-c).

The example below uses the following code in C#

```
var p = 2;
var k = 0.7;
var den = 1 + u * u + v * v;
var x = 0.5 * p * (2 * v * v + k * (1 - u * u - v * v)) / den;
var y = p * u * (v * v + k) / den;
var z = p * v * (1 + u * u - k) / den;
```

See also: https://mathcurve.com/surfaces.gb/cycliddedupin/cyclidededupin.shtml

See also: https://en.wikipedia.org/wiki/Dupin_cyclide#Parabolic_cyclides

See also Wikipedia [1359], MathWorld [1063].

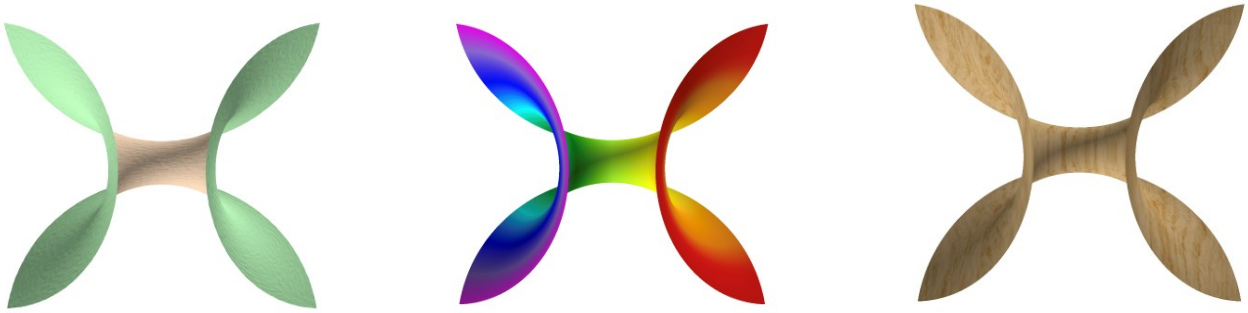

23.3.11 Dinis Surface (twisted pseudosphere)

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D11a_Dini.3D.xml (D11a-c).

The example below uses the following code in C#

```
var a = 1;
var b = 0.2;
var x = a * Math.Cos(u) * Math.Sin(v);
var y = a * Math.Sin(u) * Math.Sin(v);
var z = a * (Math.Cos(v) + Math.Log(Math.Tan(0.5 * v))) + b * u;
```

See also: https://mathworld.wolfram.com/DinisSurface.html

See also Wikipedia [1359], MathWorld [1063].

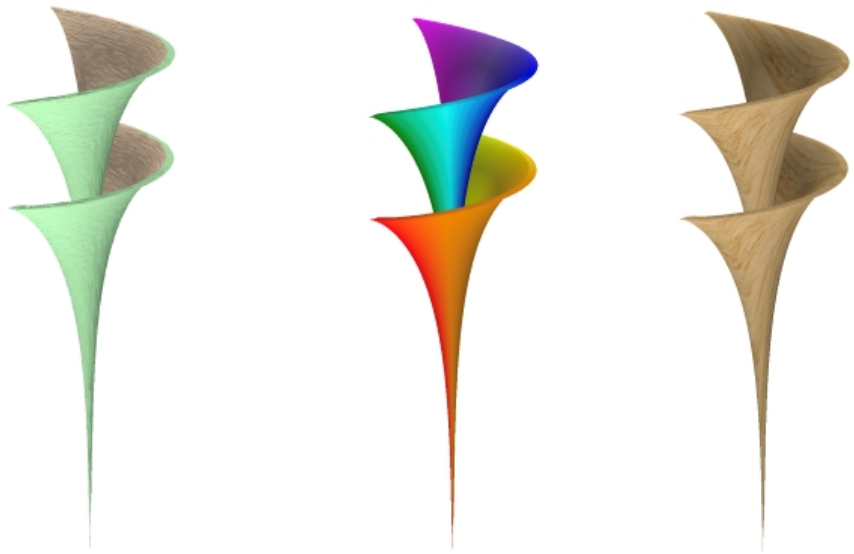

23.3.12 Plueckers conoid

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D12a_Pluecker.3D.xml (D12a-f).

// See : https://mathworld.wolfram.com/PlueckersConoid.html // See : Gray, p. 436 // See : https://en.wikipedia.org/wiki/Pl%C3%BCcker%27s_conoid

```
var n = 2;
var r = u;
var theta = v;

var x = r * Math.Cos(theta);
var y = r * Math.Sin(theta);
var z = Math.Sin(n * theta);
```

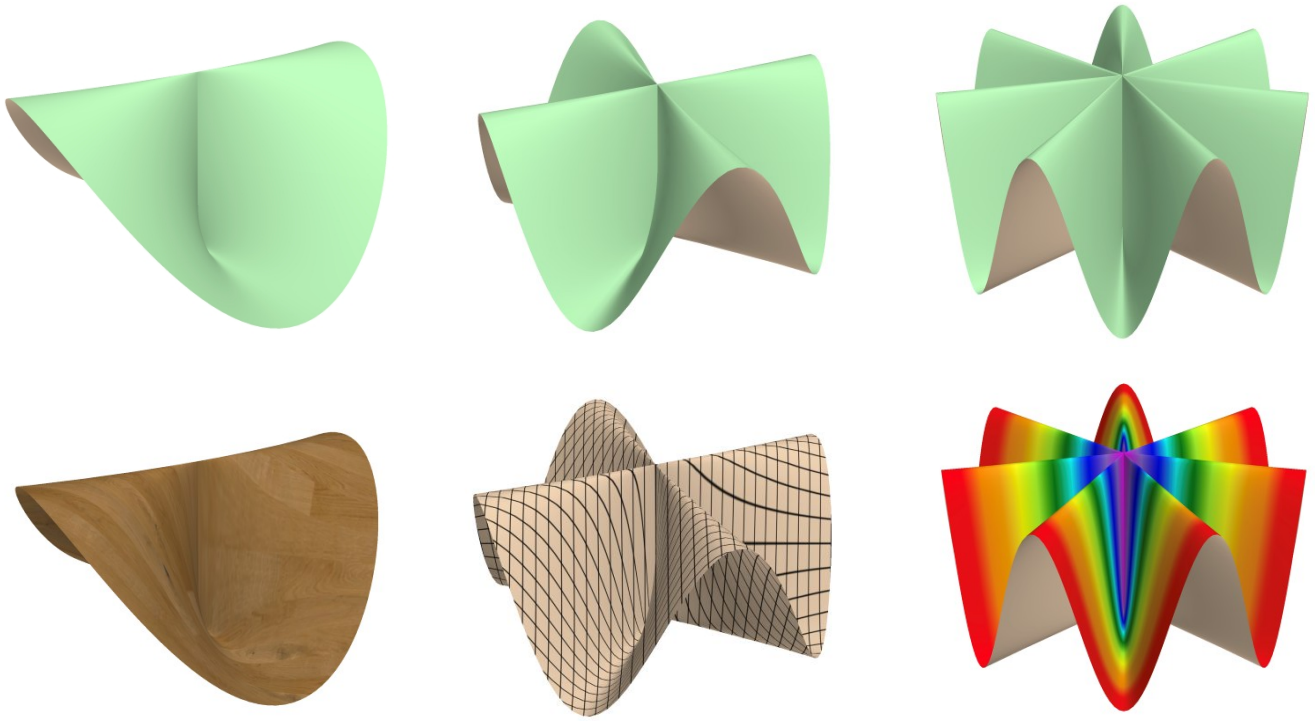

References

Gray, A. “Plücker’s Conoid.” Modern Differential Geometry of Curves and Surfaces with Mathematica, 2nd ed. Boca Raton, FL: CRC Press, pp. 435-437, 1997.

23.3.13 Umbilic Torus

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D13a_UmbilicTorus.3D.xml (D13a-c).

```
var x = Math.Cos(u) * (7 + Math.Cos(u / 3 - 2 * v) + 2 * Math.Cos(u / 3 + v));
var y = Math.Sin(u) * (7 + Math.Cos(u / 3 - 2 * v) + 2 * Math.Cos(u / 3 + v));
var z = Math.Sin(u / 3 - 2 * v) + 2 * Math.Sin(u / 3 + v);
```

// See also: http://www.3d-meier.de/tut3/Seite61.html // Umbilic Torus

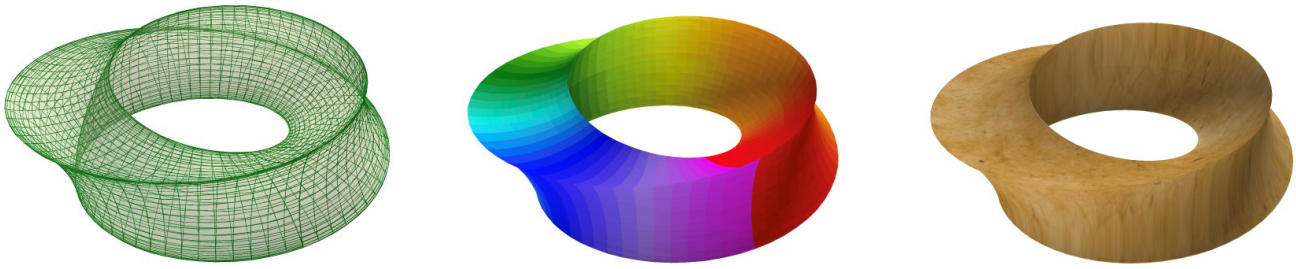

23.3.14 Skidian's ruled surface

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D14a_Skidan.3D.xml (D14a-f).

```
var a = Math.PI / 4.0;
var h = 2.0;
var n = 4.0;

var b = h * Math.Abs(Math.Cos(n * v));
var ca = Math.Cos(a);
var sa = Math.Sin(a);

var x = (u * sa + b * ca) * Math.Sin(v);
var y = (u * sa + b * ca) * Math.Cos(v);
var z = (u * ca - b * sa);
```

// See also: http://www.3d-meier.de/tut3/Seite227.html // Skidan Ruled Surface // See Krivoshapko, p. 499

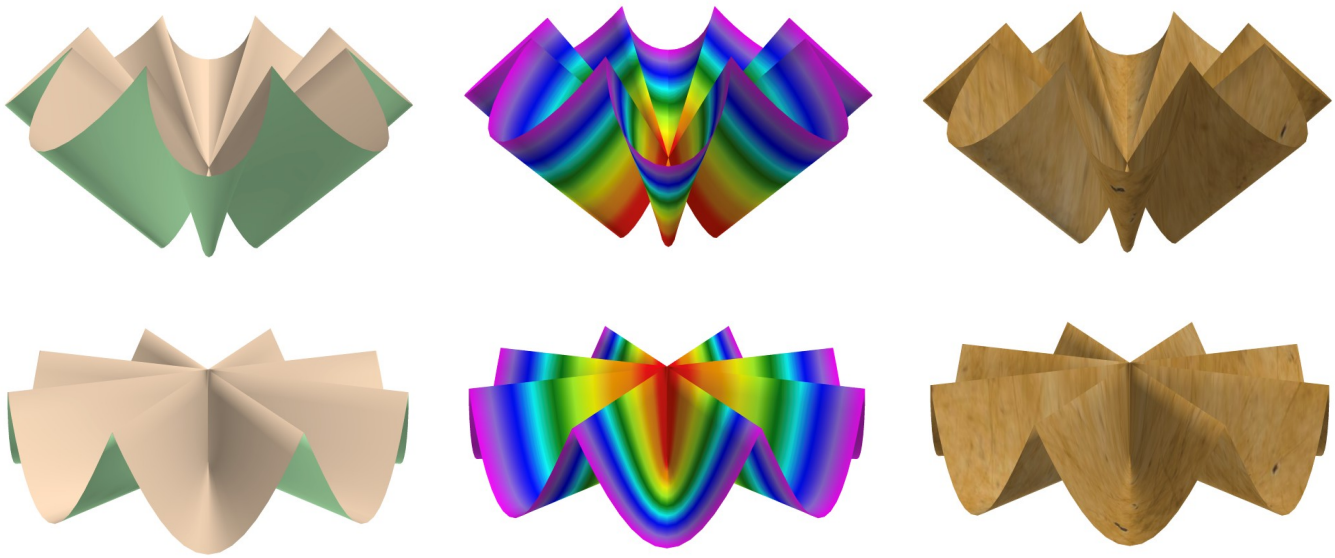

23.3.15 Umbrella surface

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D15a_Umbrella.3D.xml (D15a-f).

```
var R = 0.6;
var h = 0.6;
var n = 8.0;

var r = R / n;
var x = ctx.cbrt(u) * ((R - r)) * Math.Cos(v) + r * Math.Cos((n - 1) * v);
var y = ctx.cbrt(u) * ((R - r)) * Math.Sin(v) - r * Math.Sin((n - 1) * v);
var z = h * (1 - u);
```

// See also: http://www.3d-meier.de/tut3/Seite215.html // Umbrella Surface // See Krivoshapko, p. 507 - 509 // See Krivoshapko, p. 513 - 515 // See Krivoshapko, p. 521, 526, 530, 531, 533

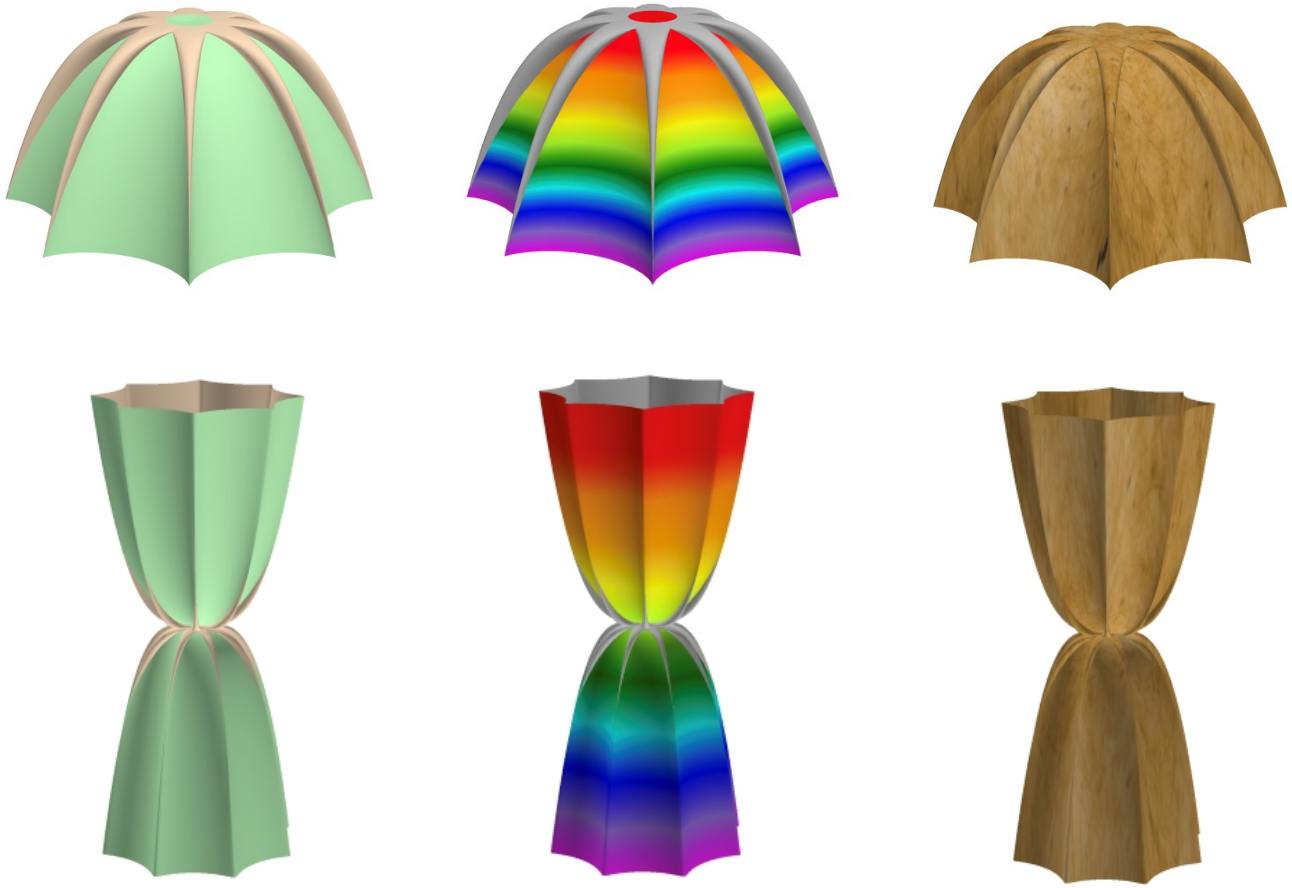

23.3.16 Cyclic surfaces (generalized torus)

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D16a_CyclicSurface1.3D.xml (D16a-n).

```
var a = 1.0;
var b = 2.0;
var d = 0.0;
var p = 1.0;

var R = a * (1 - d * Math.Cos(p * u));
var x = (b + R * Math.Cos(v)) * Math.Cos(u);
var y = (b + R * Math.Cos(v)) * Math.Sin(u);
var z = R * Math.Sin(v);
```

// See Krivoshapko, p. 376

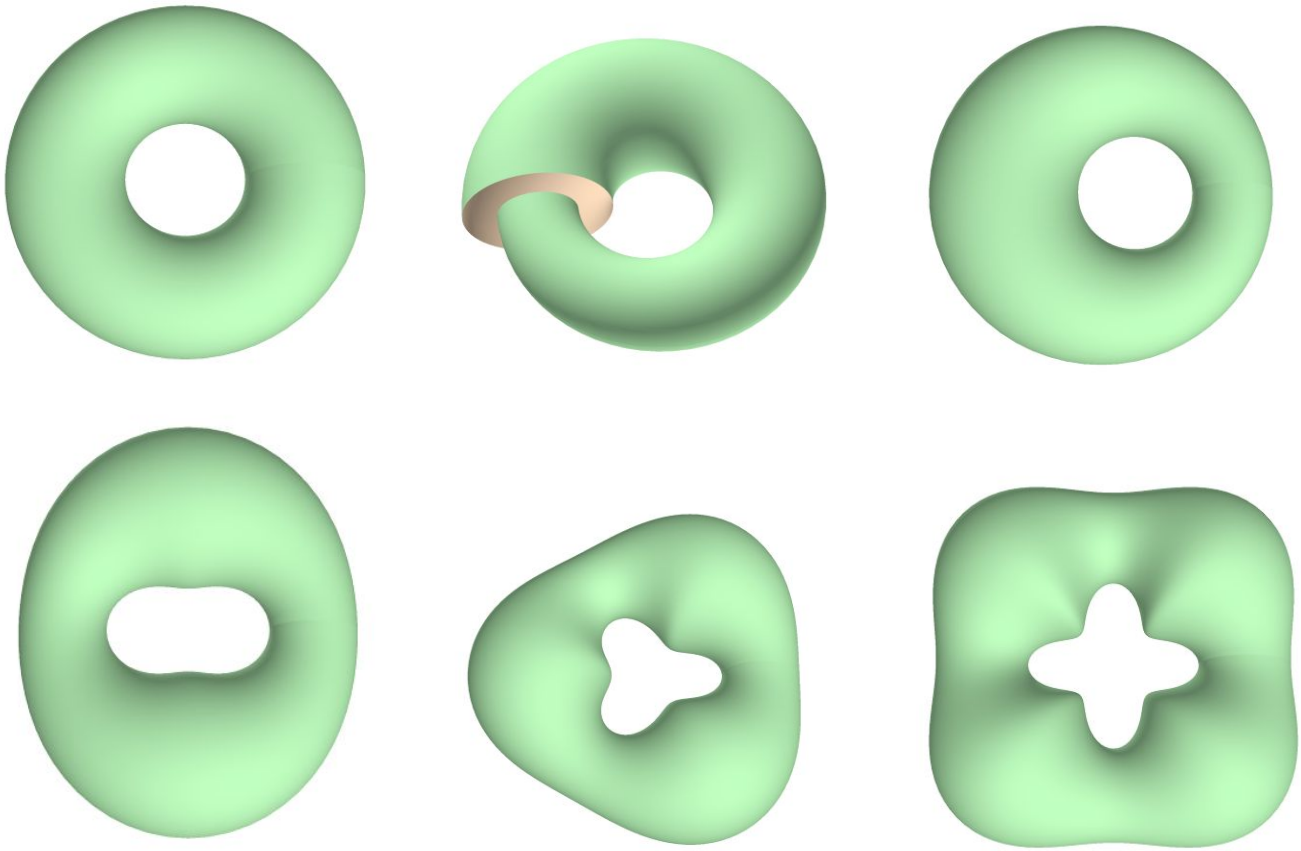

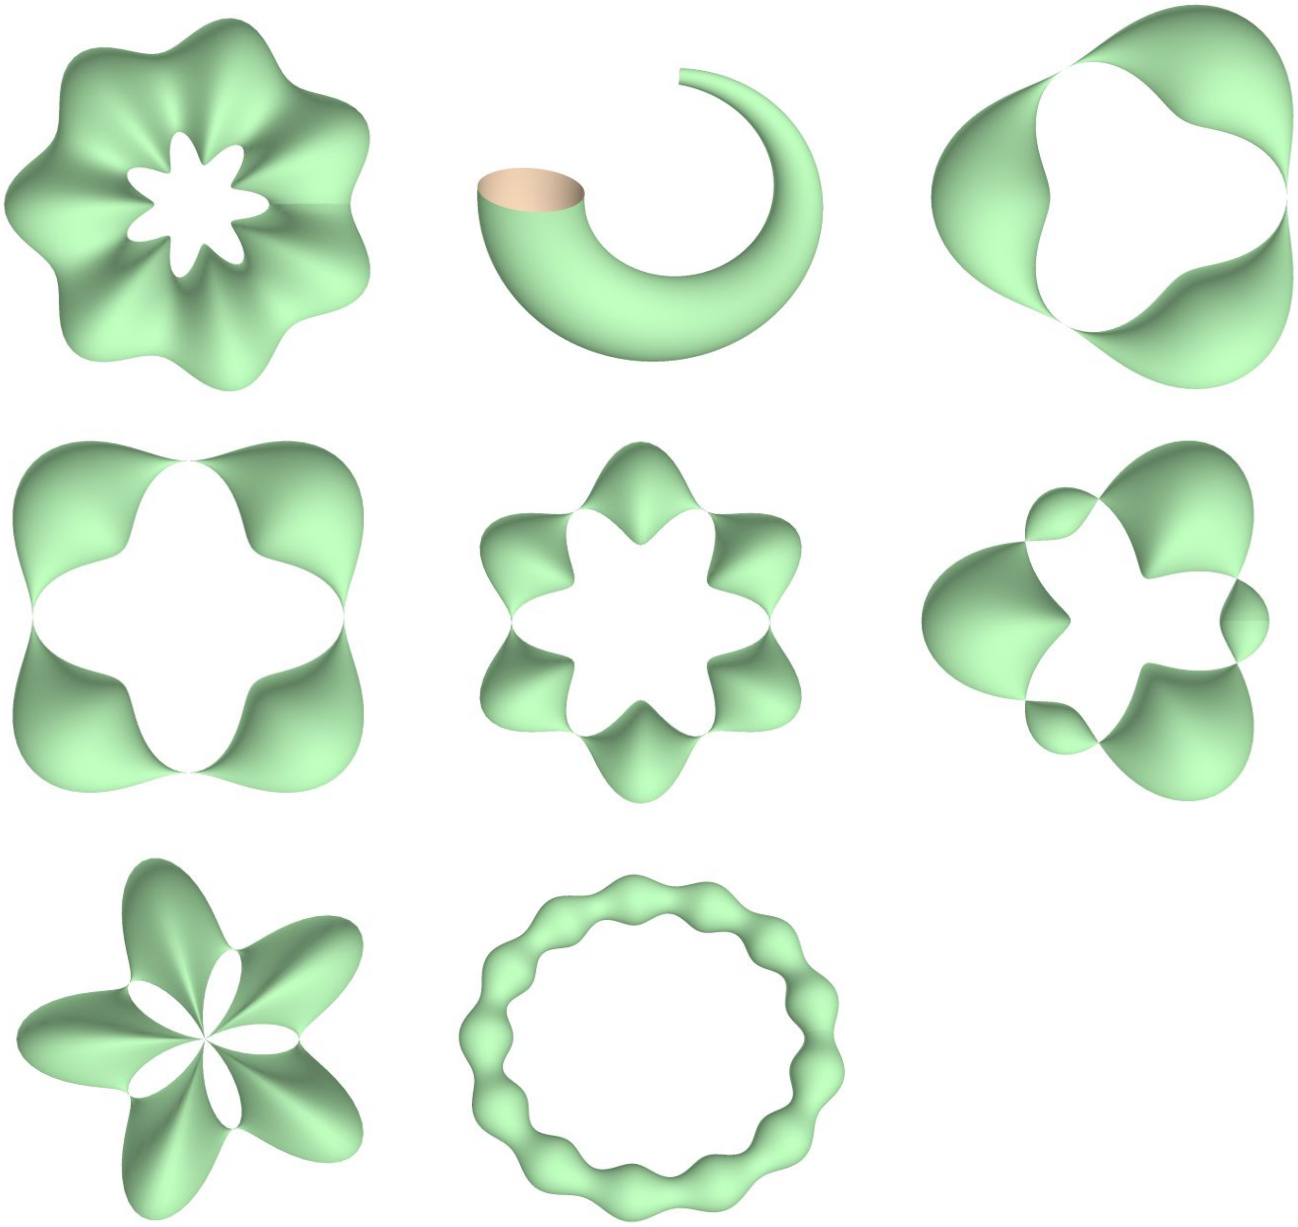

23.3.17 Goursat surfaces

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D17a_Goursat1.3D.xml (D17a-f).

The example below uses the following code in C#

```
var a = -0.33;
var b = 0.2;
var c = -3;
var p = 1;

var su = Math.Sin(u);
var cu = Math.Cos(u);
var sv = Math.Sin(v);
var cv = Math.Cos(v);

var su4 = su * su * su * su;
var cu4 = cu * cu * cu * cu;

var sv4 = sv * sv * sv * sv;
var cv4 = cv * cv * cv * cv;

var D = (su4 + cu4) * cv4 + sv4;
var R = Math.Sqrt((-b + p * Math.Sqrt(b * b - 4 * c * (a + D))) / (2 * (a + D)));
var x = R * cv * cu;
var y = R * cv * su;
var z = R * sv;
```

// See : Krivoshapko (2015), p. 643 // See: https://mathworld.wolfram.com/GoursatsSurface.html // See Gray 1997, p. 314) // See: https://mathcurve.com/surfaces.gb/goursat/goursat.shtml

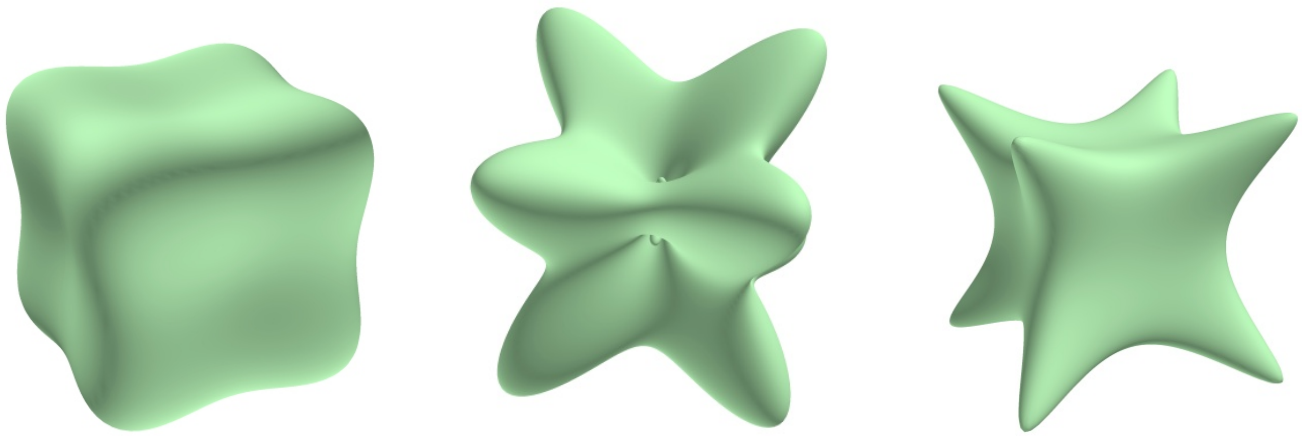

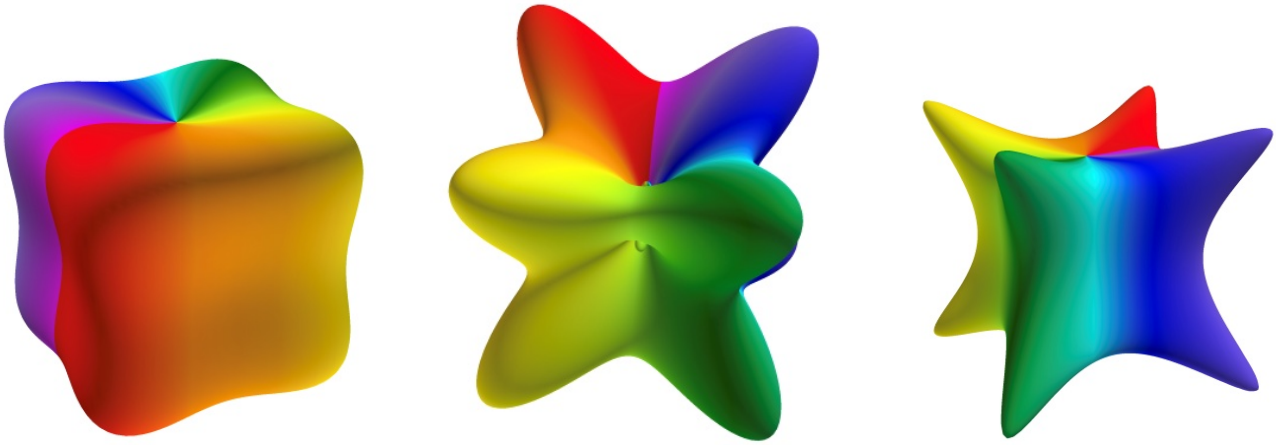

23.3.18 Cyclides triples

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D18a_CyclidesTriple.3D.xml (D18a-f).

The example below uses the following code in C#

```
var su = Math.Sin(u);
var s2u = Math.Sin(2 * u);
var cu = Math.Cos(u);
var sv = Math.Sin(v);
var cv = Math.Cos(v);

var x = cv * sv * sv * sv * s2u * cu;
var y = cv * sv * sv * sv * s2u * su;
var z = cv * sv * sv * s2u;
```

// See : Krivoshapko (2015), p. 651

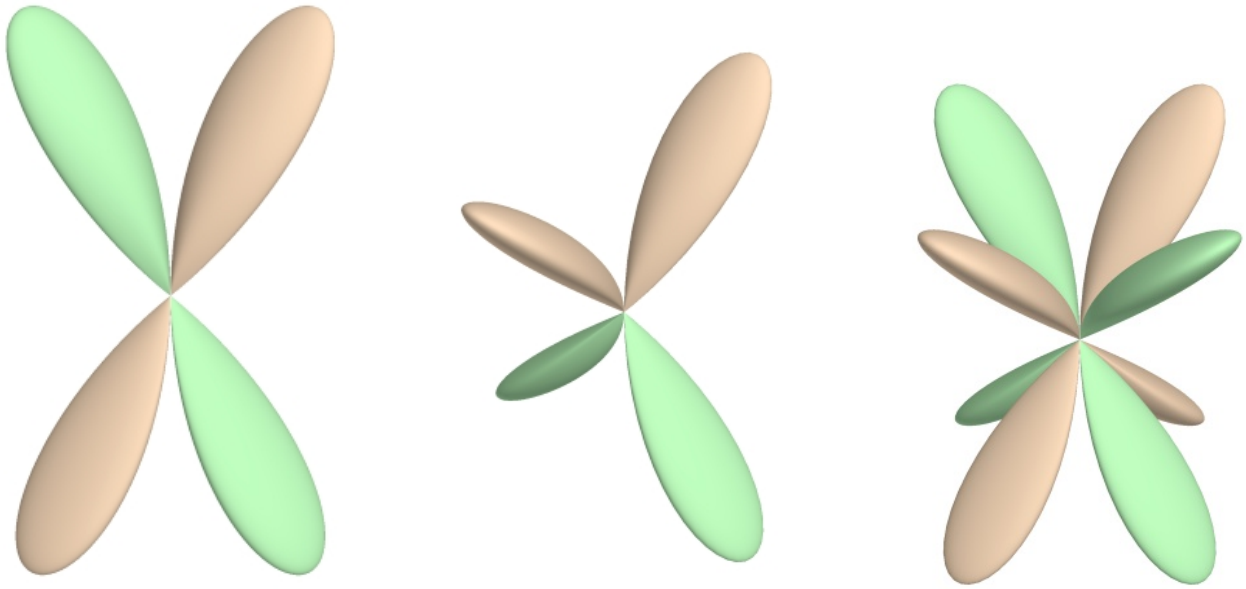

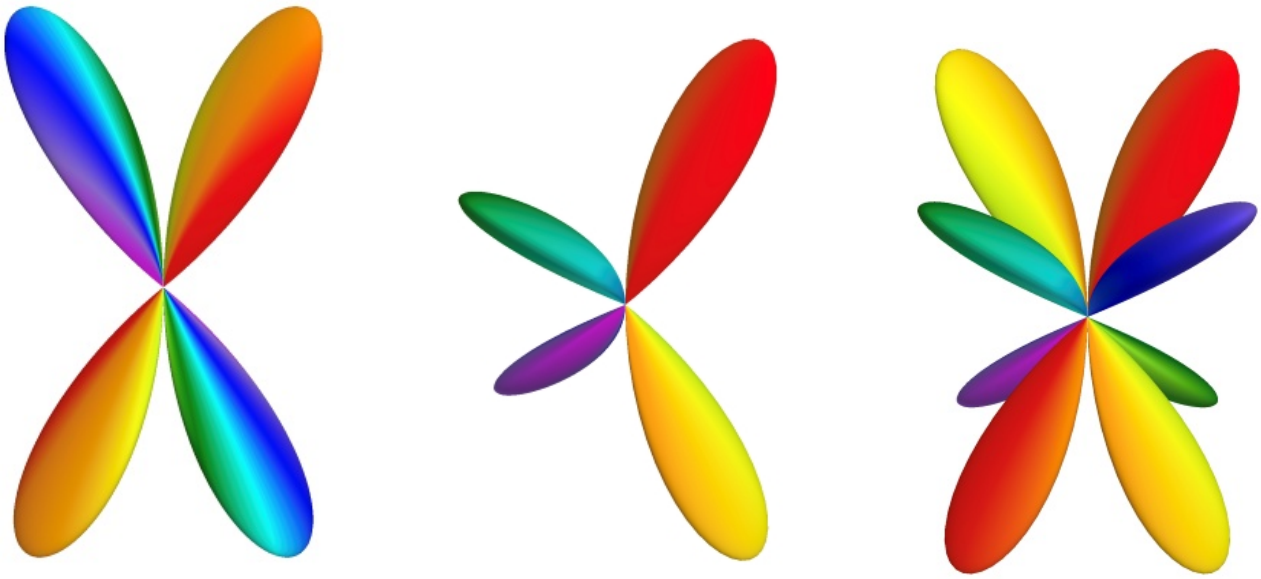

23.3.19 Ship Lamé

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D19a_ShipLame.3D.xml (D19a-c).

The example below uses the following code in C#

```
var B = 6.5;
var L = 4.0;
var T = 2.0;

var x = u * L;
var y = Math.Sign(Math.Cos(v)) * B * Math.Sqrt(1 - u * u * u * u) * Math.Sqrt(Math.Abs(Math.Cos(v))) / 2.0;
var z = Math.Sign(Math.Sin(v)) * T * Math.Sqrt(1 - u * u) * Math.Sqrt(Math.Abs(Math.Sin(v)));
```

// See : Krivoshapko (2015), p. 671

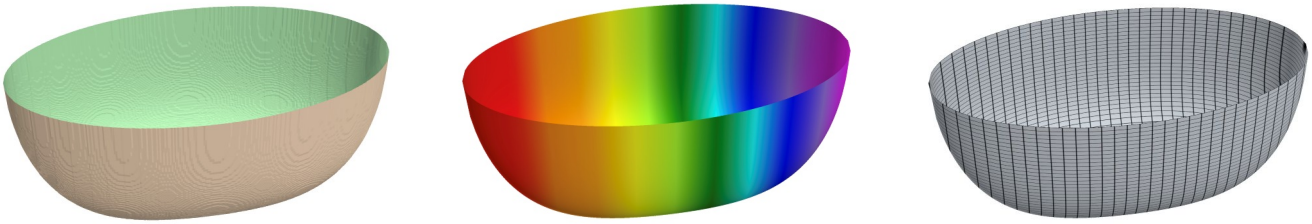

23.4 Minimal surfaces

23.4.1 Catenoid

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D01a_Catenoid.3D.xml (D01a-c).

The example below uses the following code in C#

```
var c = 2;
var x = c * Math.Cosh(v / c) * Math.Cos(u);
var y = c * Math.Cosh(v / c) * Math.Sin(u);
var z = v;
```

See also: https://mathworld.wolfram.com/Catenoid.html

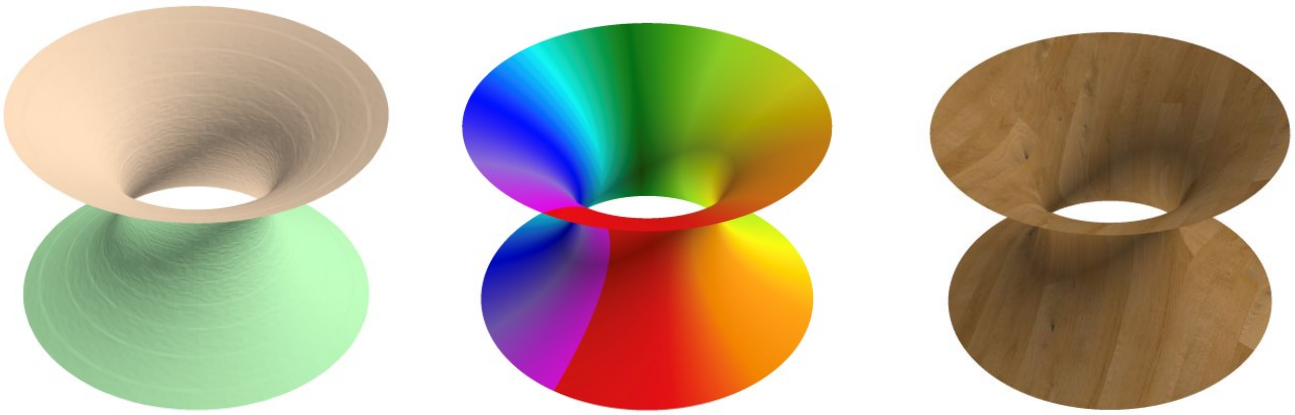

23.4.2 Helicoid

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D02a_Helicoid.3D.xml (D02a-c).

The example below uses the following code in C#

```
var x = u * Math.Cos(v);
var y = u * Math.Sin(v);
var z = v;
```

See also: https://mathworld.wolfram.com/Helicoid.html

See also Wikipedia [1359], MathWorld [1063].

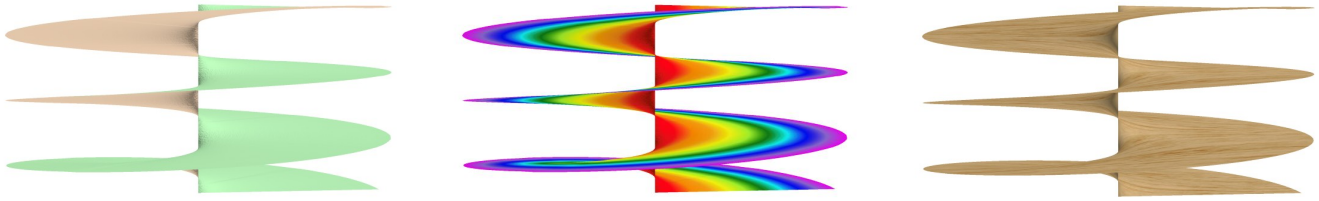

References

Gray, A. Modern Differential Geometry of Curves and Surfaces with Mathematica, 2nd ed. Boca Raton, FL: CRC Press, pp. 449 and 644, 1997.

23.4.3 Bours minimal surface

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D03a_Bour.3D.xml (D03a-c).

The example below uses the following code in C#

```
var sv = Math.Sin(v);
var s2v = Math.Sin(2 * v);
var c32u = Math.Cos(1.5 * v);
var cv = Math.Cos(v);
var c2v = Math.Cos(2 * v);
var u2 = 0.5 * u * u;
var u32 = (4.0 / 3.0) * Math.Sqrt(u * u * u);

var x = u * cv - u2 * c2v;
var y = -u * sv - u2 * s2v;
var z = u32 * c32u;
```

See also: https://mathworld.wolfram.com/BoursMinimalSurface.html

See also Wikipedia [1359], MathWorld [1063].

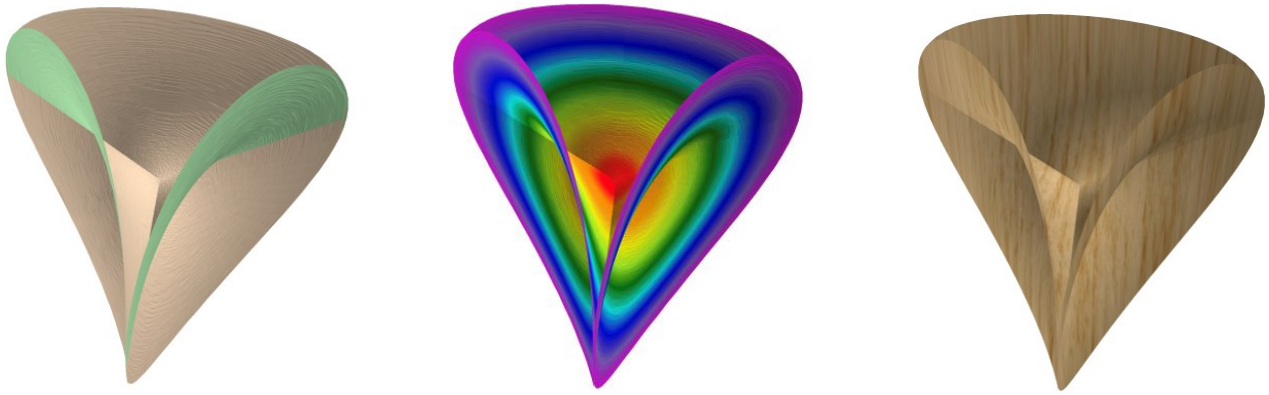

23.4.4 Catalan minimal surface

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D04a_Catalan.3D.xml (D04a-c).

The example below uses the following code in C#

```
var x = u - Math.Sin(u) * Math.Cosh(v);
var y = 4 * Math.Sin(u / 2) * Math.Sinh(v / 2);
var z = 1 - Math.Cos(u) * Math.Cosh(v);
```

See also: https://mathworld.wolfram.com/CatalanMinimalSurface.html

See also: https://en.wikipedia.org/wiki/Catalan%27s_minimal_surface

See also Wikipedia [1359], MathWorld [1063].

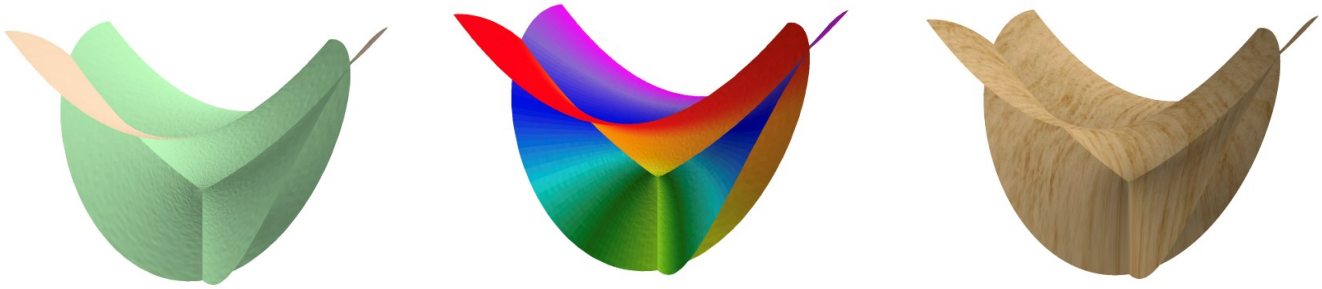

23.4.5 Ennepers first minimal surface

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D05a_Enneper.3D.xml (D05a-c).

The example below uses the following code in C#

```
var x = u - u * u * u / 3 + u * v * v;
var y = u * u - v * v;
var z = v - v * v * v / 3 + v * u * u;
```

See also: https://mathworld.wolfram.com/EnnepersMinimalSurface.html

See also: https://en.wikipedia.org/wiki/Enneper_surface

See also Wikipedia [1359], MathWorld [1063].

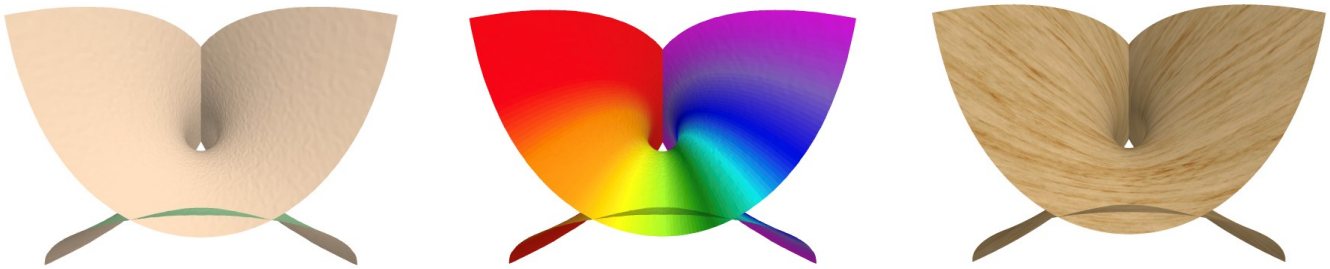

23.4.6 Enneper second minimal surface

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D06a_Enneper2.3D.xml (D06a-c).

The example below uses the following code in C#

```
var n = 2;
var a = 1;

Complex i = Complex.ImaginaryOne;
Complex w = new Complex(u, v);
Complex w2nm1 = Complex.Pow(w, 2 * n - 1) / (2 * n - 1);
Complex wn = Complex.Pow(w, n);

var x = a * (w - w2nm1).Real;
var y = a * (-i * (w + w2nm1)).Real;
var z = 2 * a * (wn / n).Real;
```

See also: https://mathcurve.com/surfaces.gb/enneper/enneper.shtml

See also Wikipedia [1359], MathWorld [1063].

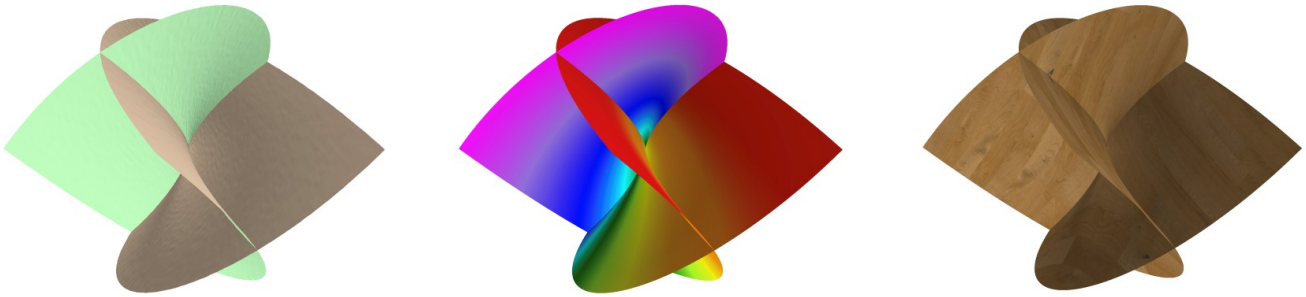

23.4.7 Hennebergs minimal surface

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D07a_Henneberg.3D.xml (D07a-c).

The example below uses the following code in C#

```
var sv = Math.Sin(v);
var s3v = Math.Sin(3 * v);
var cv = Math.Cos(v);
var c2v = Math.Cos(2 * v);
var c3v = Math.Cos(3 * v);
var shu = Math.Sinh(u);
var ch2u = Math.Cosh(2 * u);
var sh3u = Math.Sinh(3 * u);

var x = 2 * shu * cv - (2.0 / 3.0) * sh3u * c3v;
var y = 2 * shu * sv + (2.0 / 3.0) * sh3u * s3v;
var z = 2 * ch2u * c2v;
```

See also: https://mathworld.wolfram.com/HennebergsMinimalSurface.html

See also: https://en.wikipedia.org/wiki/Henneberg_surface

See also Wikipedia [1359], MathWorld [1063].

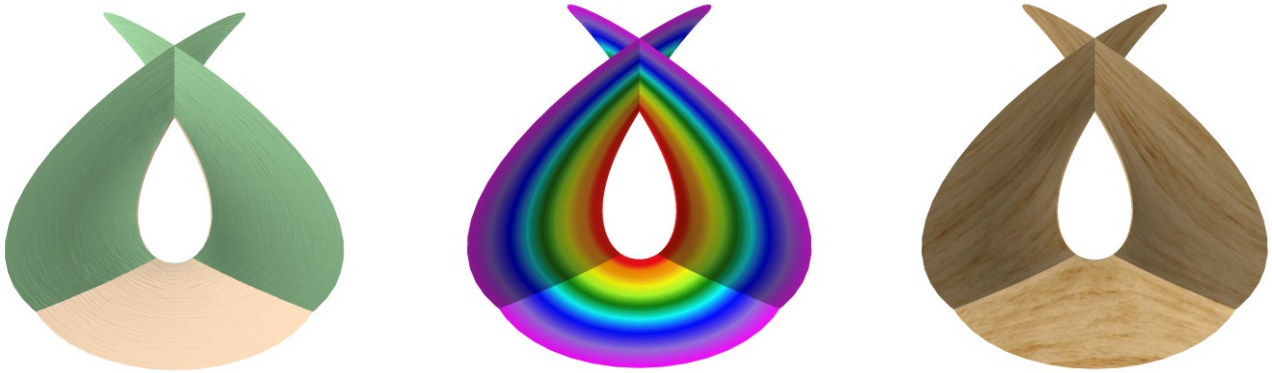

23.4.8 Scherk's first minimal surface

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D08a_Scherk1.3D.xml (D08a-c).

The example below uses the following code in C#

```
var a = 1 / Math.PI;
var y = u;
var x = a * Math.Log(Math.Cos(v / a) / Math.Cos(u / a));
var z = v;
```

See also Wikipedia [1359], MathWorld [1063].

See also https://mathcurve.com/surfaces.gb/scherk/scherk.shtml See also Krivoshapko and Ivanov [397], p. 431

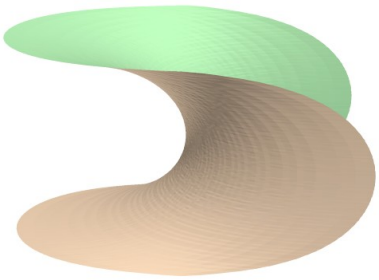
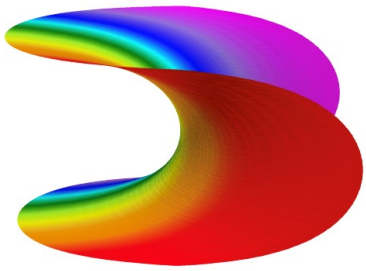

23.4.9 Scherk's second minimal surface

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D09a_Scherk2.3D.xml (D09a-c).

The example below uses the following code in C#

```
var t = v;
var r = u;
var r2 = r * r;
var ct = Math.Cos(t);
var st = Math.Sin(t);
var x = Math.Log((1 + r2 + 2 * r * ct) / (1 + r2 - 2 * r * ct));
var y = Math.Log((1 + r2 - 2 * r * st) / (1 + r2 + 2 * r * st));
var z = 2 * Math.Atan((2 * r2 * Math.Sin(2 * t)) / (r2 * r2 - 1));
y = -y;
```

See also Wikipedia [1359], MathWorld [1063].

See also https://mathworld.wolfram.com/ScherksMinimalSurfaces.html

See also Krivoshapko and Ivanov [397], p. 442

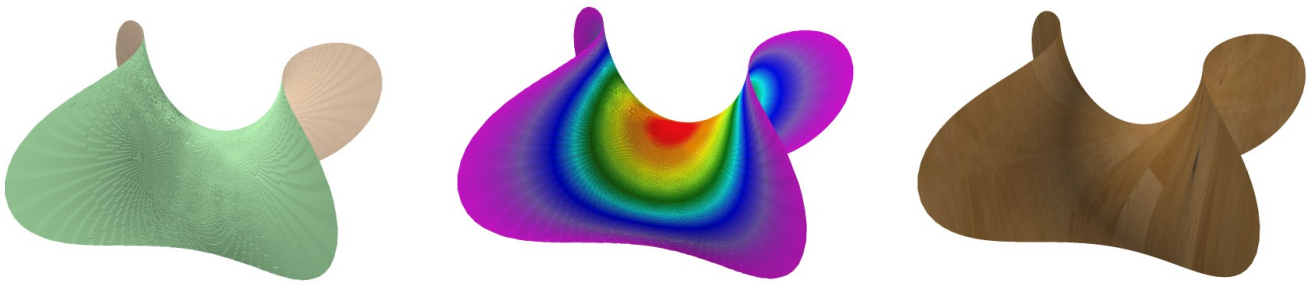

23.4.10 Richmond minimal surface

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D10a_Richmond.3D.xml (D10a-f).

The example below uses the following code in C#

```
var n = 2.0;
var u2s = Math.Pow(u, 2 * n + 1) / (4 * n + 2);
var x = -Math.Cos(v) / (2 * u) - u2s * Math.Cos(-(2 * n + 1) * v);
var y = -Math.Sin(v) / (2 * u) + u2s * Math.Sin(-(2 * n + 1) * v);
var z = Math.Pow(u, n) * Math.Cos(n * v) / n;
```

// See also: http://www.3d-meier.de/tut3/Seite250.html // Richmond Surface III // See also: https://en.wikipedia.org/wiki/Richmond_surface

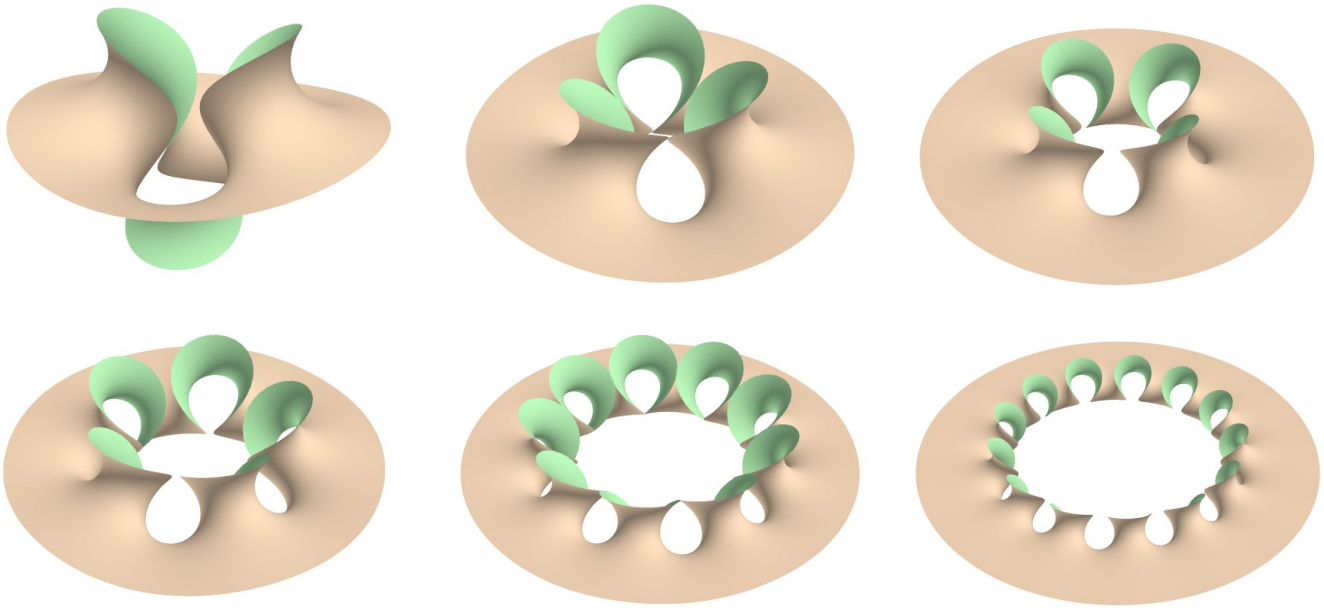

23.4.11 Generalized Ennneper surfaces

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D11a_GenEnneper.3D.xml (D11a-f).

The example below uses the following code in C#

```
var s = 2.0;
var u2s = Math.Pow(u, 2 * s - 1) / (2 * s - 1);
var x = u * Math.Cos(v) - u2s * Math.Cos((2 * s - 1) * v);
var y = -u * Math.Sin(v) - u2s * Math.Sin((2 * s - 1) * v);
var z = 2 * Math.Pow(u, s) * Math.Cos(s * v) / s;
```

// See also: http://www.3d-meier.de/tut3/Seite247.html // Wavy Enneper Surface

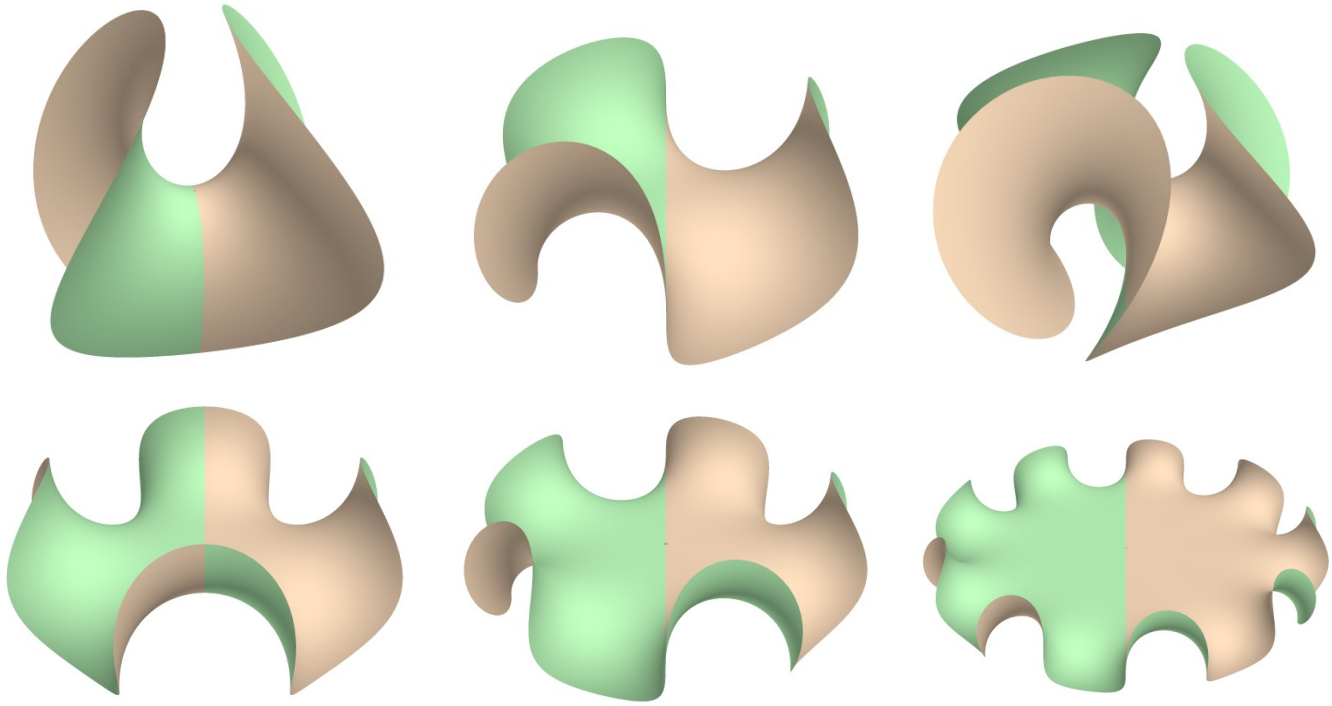

23.5 Nonorientable (one-sided) Surfaces

23.5.1 Moebius Strip

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D01a_Moebius.3D.xml (D01a-c).

The example below uses the following code in C#

```
var a = 1.0;
var b = 1.0;
int m = 1;

var x = -(a + u * Math.Sin(m * v / 2)) * Math.Cos(v);
var y = (b + u * Math.Sin(m * v / 2)) * Math.Sin(v);
var z = 3 * (u / 2) * Math.Cos(v / 2);
```

See also: http://en.wikipedia.org/wiki/M%C3%B6bius_strip

See also: https://mathworld.wolfram.com/MoebiusStrip.html

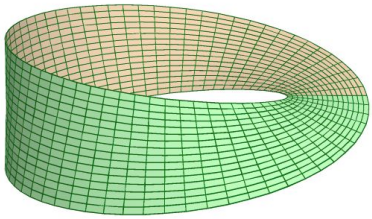

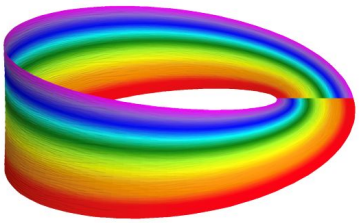

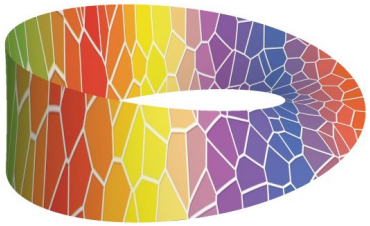

23.5.2 Cross-Cap Surface

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D02a_CrossCap.3D.xml (D02a-c).

See also: https://mathworld.wolfram.com/Cross-Cap.html

See also Wikipedia [1359], MathWorld [1063].

```
double su = Math.Sin(u);
double sv = Math.Sin(v);
double s2v = Math.Sin(2*v);
double cu = Math.Cos(u);
double cv = Math.Cos(v);
x = 0.5 * cu * s2v;
z = 0.5 * su * s2v;
y = 0.5 * (cv*cv - cu*cu * sv*sv);
```

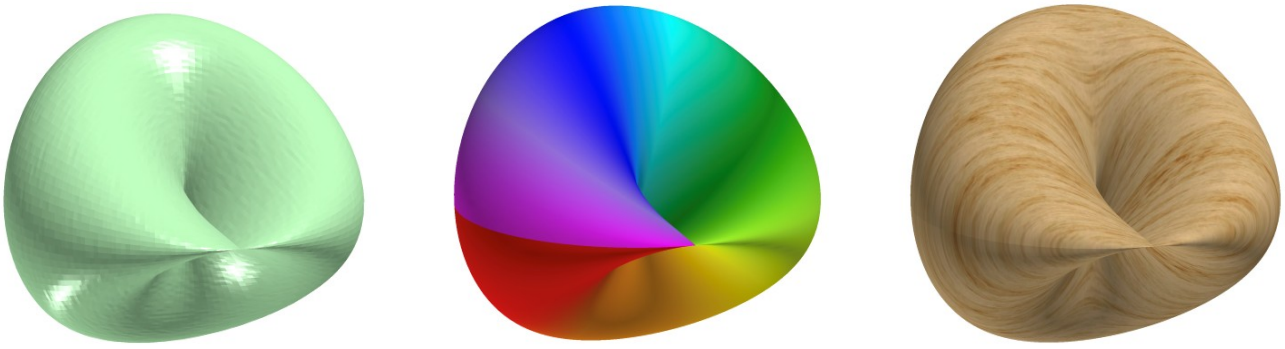

23.5.3 Pseudo Cross-Cap Surface

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D03a_PseudoCrossCap.3D.xml (D03a-c).

See also: https://mathworld.wolfram.com/Pseudocrosscap.html

See also: http://www.3d-meier.de/tut3/Seite51.html

See also Wikipedia [1359], MathWorld [1063].

```
double sv = Math.Sin(v);
double s2v = Math.Sin(2*v);
x = (1 - u*u) * sv;
y = (1 - u*u) * s2v;
z = u;
```

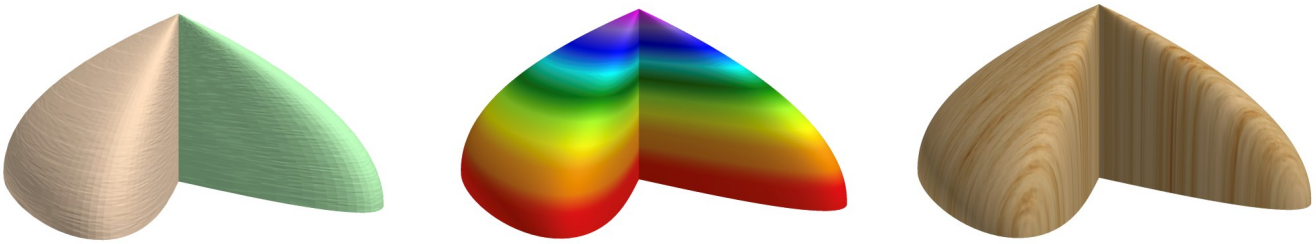

23.5.4 Roman Surface (or Steiner Surface)

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D04a_Roman.3D.xml (D04a-c).

See also: https://mathworld.wolfram.com/RomanSurface.html

See also: https://en.wikipedia.org/wiki/Roman_surface

See also: http://paulbourke.net/geometry/steiner/

```
double r2 = 1;
double su = Math.Sin(u);
double sv = Math.Sin(v);
double cu = Math.Cos(u);
double cv = Math.Cos(v);
x = r2 * cu * su * sv;
y = r2 * cu * su * cv;
z = r2 * cu*cu * sv * cv;
```

See also Wikipedia [1359], MathWorld [1063].

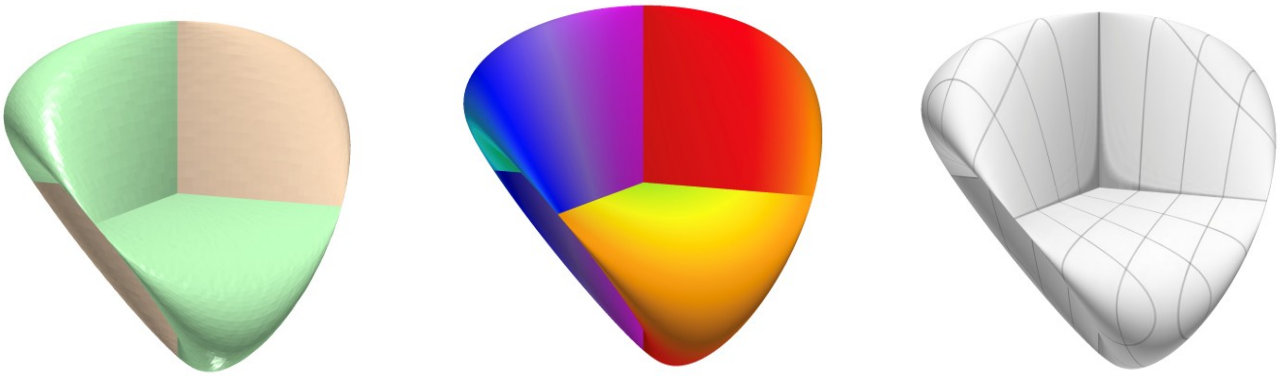

23.5.5 Klein bagel

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D05a_KleinBagel.3D.xml (D05a-c).

See also: https://en.wikipedia.org/wiki/Klein_bottle#The_figure_8_immersion

See also: https://mathworld.wolfram.com/KleinBottle.html

```
double r = 2.1;
x = (r + Math.Cos(u / 2) * Math.Sin(v) - Math.Sin(u / 2) * Math.Sin(2 * v)) * Math.Cos(u);
z = (r + Math.Cos(u / 2) * Math.Sin(v) - Math.Sin(u / 2) * Math.Sin(2 * v)) * Math.Sin(u);
y = Math.Sin(u / 2) * Math.Sin(v) + Math.Cos(u / 2) * Math.Sin(2 * v);
```

This is the 'bagel' form of a Klein bottle, a 4 dimensional object with a single surface (lacking 'inside' or 'outside'), projected into 3-space as a self-intersecting solid.

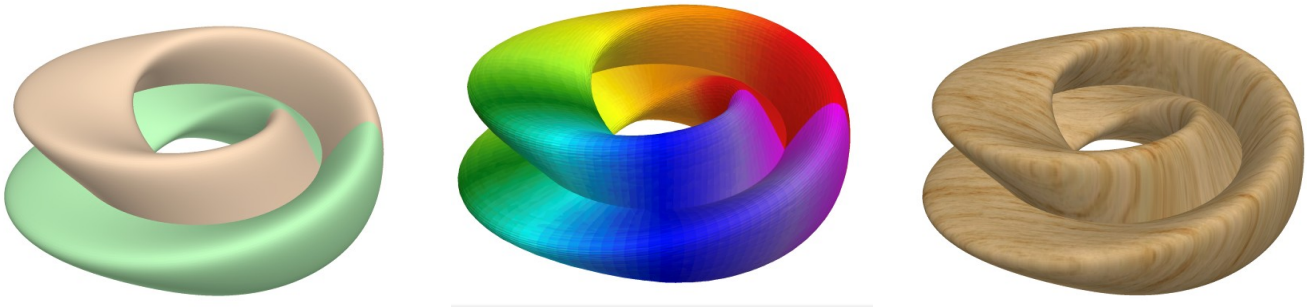

23.5.6 Klein bottle

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D06a_KleinBottle3.3D.xml (D06a-c).

See also: http://www.mapleprimes.com/maplesoftblog/95570-Klein-Bottle-Plot

See also: http://www.chebfun.org/examples/geom/ParametricSurfaces.html

See also: https://mathworld.wolfram.com/KleinBottle.html

```
double a = Math.Cos(u);
double b = Math.Sin(u);
double c = Math.Cos(v);
double a2 = a * a;
double a4 = a2 * a2;
x = -(2.0 / 15.0) * a * (3 * c + b * (-30 + a4 * (90 - 60 * a2) + 5 * a * c));
z = -(1.0 / 15.0) * b * b * (c * b * (3 - 48 * a4 + 5 * a * b * (1 - 16 * a4)) - 60);
y = -(2.0 / 15.0) * (3 + 5 * a * b) * Math.Sin(v);
```

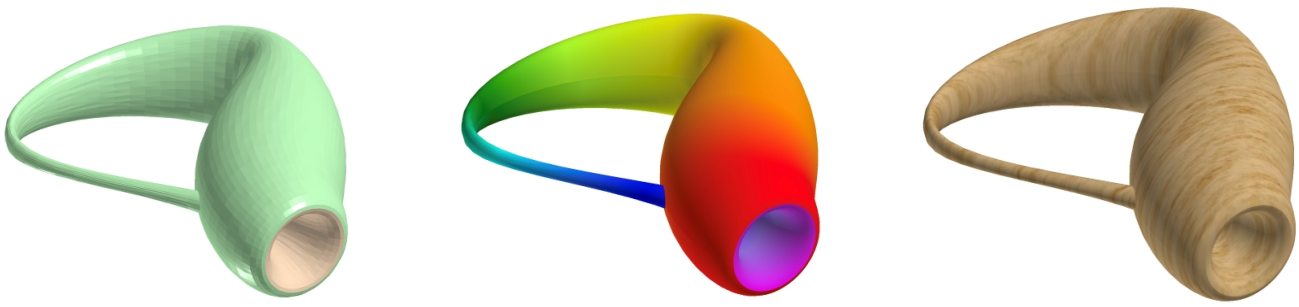

23.5.7 3D Boy Surface, version 1

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D07a_BoySurface.3D.xml (D07a-c).

See also: https://en.wikipedia.org/wiki/Boy%27s_surface

See also: http://mathworld.wolfram.com/BoySurface.html

```
double sqrt5 = Math.Sqrt(5);
// w = u*e^(iv)
double wr = Math.Cos(v);
double wi = Math.Sin(v);
Complex w = u * new Complex(wr, wi);
Complex w3 = w * w * w;
Complex w4 = w3 * w;
Complex w6 = w3 * w3;
Complex d = w6 + sqrt5 * w3 - 1;
Complex wa = w * (1 - w4) / d;
Complex wb = w * (1 + w4) / d;
Complex wc = (1 + w6) / d;
double g1 = -1.5 * wa.Imaginary;
double g2 = -1.5 * wb.Real;
double g3 = wc.Imaginary - 0.5;
double l2 = g1 * g1 + g2 * g2 + g3 * g3;
x = g1 / l2;
y = -g2 / l2;
z = g3 / l2;
```

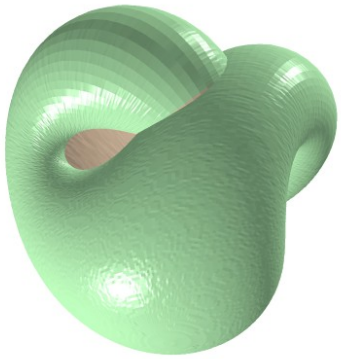
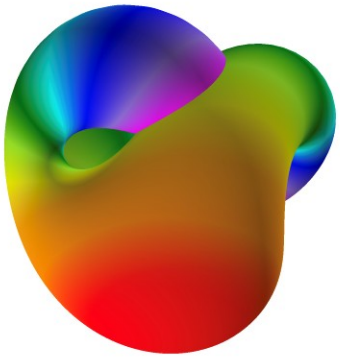


23.5.8 3D Boy Surface, version 2

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D08a_BoySurface2.3D.xml (D08a-c).

See also: https://en.wikipedia.org/wiki/Boy%27s_surface

See also: http://mathworld.wolfram.com/BoySurface.html

```
double sqrt2 = Math.Sqrt(2);
double s2v = Math.Sin(2 * v);
double cu = Math.Cos(u);
double cv = Math.Cos(v);
double cv2 = cv * cv;
double n1 = sqrt2 * cv2 * Math.Cos(2*u);
double xn = sqrt2 * cv2 * Math.Cos(2 * u) + cu * s2v;
double yn = sqrt2 * cv2 * Math.Sin(2 * u) - Math.Sin(u) * s2v;
double zn = 3 * cv2;
double d = 2 - sqrt2 * Math.Sin(3 * u) * s2v;
x = xn / d;
y = yn / d;
z = zn / d;
```

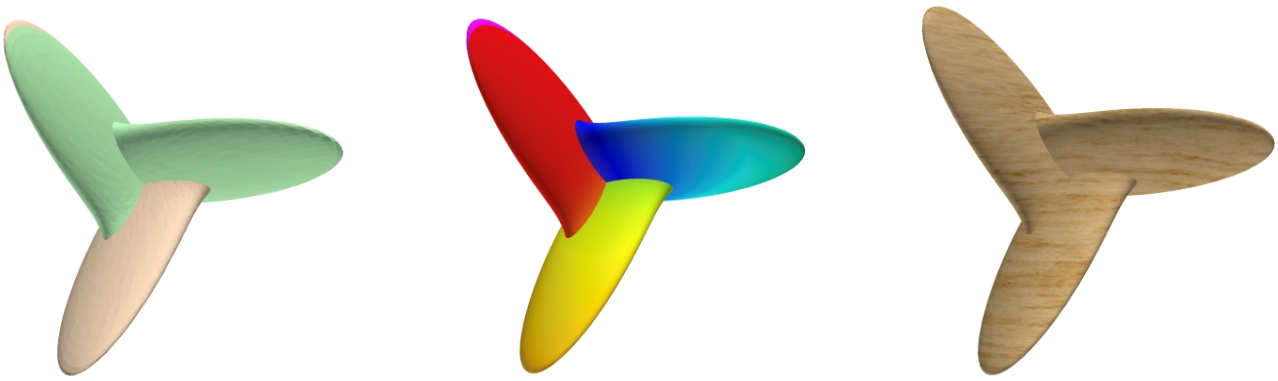

23.5.9 Morin Surface

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D08a_BoySurface2.3D.xml (D09a-f).

// See also: http://www.3d-meier.de/tut3/Seite221.html // Morin Surface // See also: https://mathcurve.com/surfaces.gb/morin/morin.shtml // See also: https://en.wikipedia.org/wiki/Morin_surface // See also: Bednorz 2019

```
var k = 1.0;
var n = 3.0;

var Sqrt2 = Math.Sqrt(2);
var cu = Math.Cos(u);
var su = Math.Sin(u);
var K = cu / (Sqrt2 - k * Math.Sin(2 * u) * Math.Sin(n * v));

var x = K * (2 / (n - 1) * cu * Math.Cos((n - 1) * v) + Sqrt2 * su * Math.Cos(v));
var y = K * (2 / (n - 1) * cu * Math.Sin((n - 1) * v) - Sqrt2 * su * Math.Sin(v));
var z = K * cu;
```

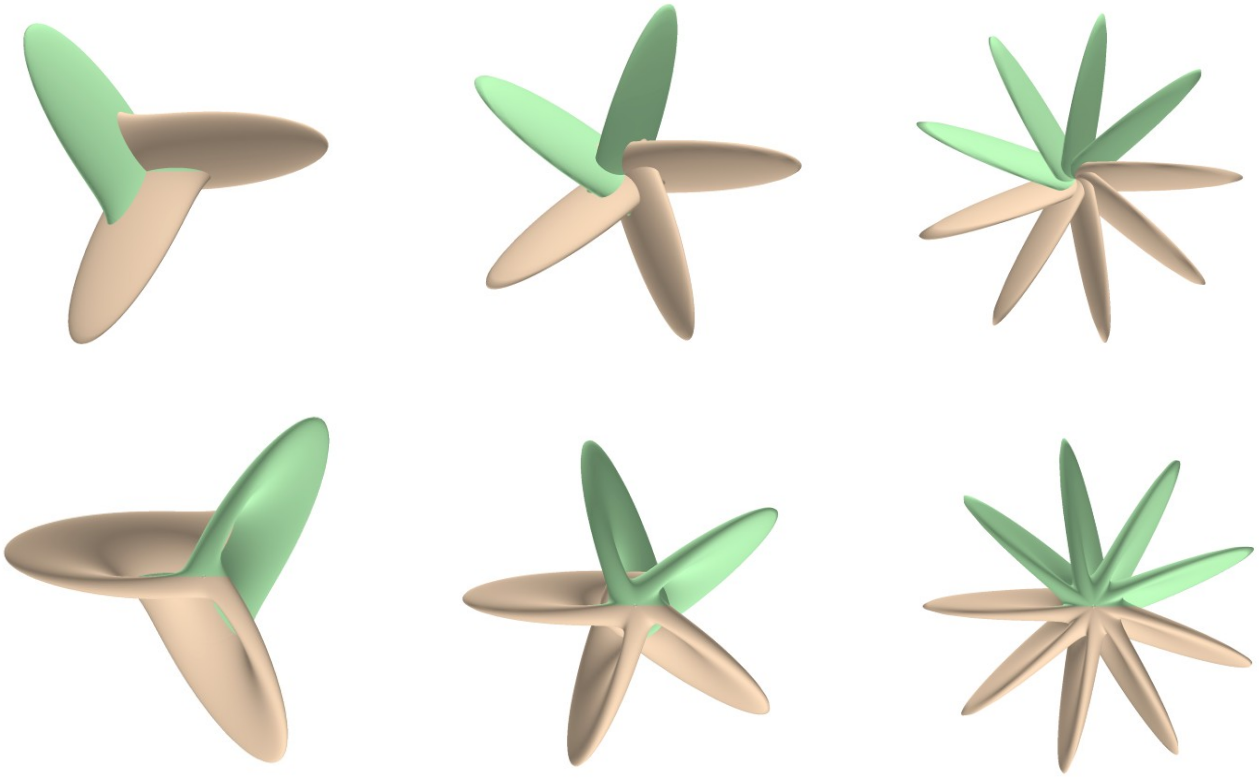

23.6 Decorative parametric surfaces

https://de.mathworks.com/help/matlab/ref/plot3.html

https://doc.sagemath.org/html/en/reference/plot3d/index.html

http://www.3d-meier.de/tut3/Seite0.html

http://www.3d-meier.de/tut8/Seite3.html

https://docs.ambientcg.com/books/website-licensing/page/license-information

https://ambientcg.com/list?category=&date=&createdUsing=&basedOn=&q=&method=&type=&sort=Downloads

23.6.1 Bourke Seashell

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D01a_BourkeSeaShell.3D.xml (D01a-c).

See also: http://paulbourke.net/geometry/spiral/

```
double n = 3;  // number of spirals
double a = 1;  // final shell radius
double b = 2;  // height
double c = 0.4;  // inner radius

double s = v;
double t = u;
double pt = t/(2*Math.PI);  // inner radius

x = a * (1 - pt) * Math.Cos(n*t) * (1 + Math.Cos(s)) + c * Math.Cos(n*t);
z = a * (1 - pt) * Math.Sin(n*t) * (1 + Math.Cos(s)) + c * Math.Sin(n*t);
y = b * pt + a * (1 - pt) * Math.Sin(s);
```

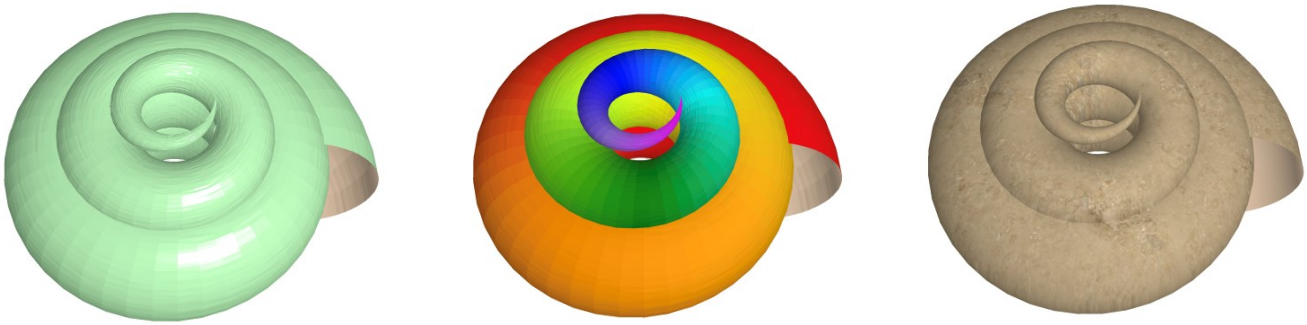

23.6.2 Seashell (mathworld.wolfram)

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D02a_Seashell.3D.xml (D02a-c).

See also: https://mathworld.wolfram.com/Seashell.html

```
double a = Math.Exp(u / (6.0 * Math.PI));
double b = Math.Cos(v / 2.0);

x = 2.0 * (1.0 - a) * Math.Cos(u) * b * b;
y = 2.0 * (-1.0 + a) * Math.Sin(u) * b * b;
z = (1.0 - a * a - Math.Sin(v) * (1.0 - a));
```

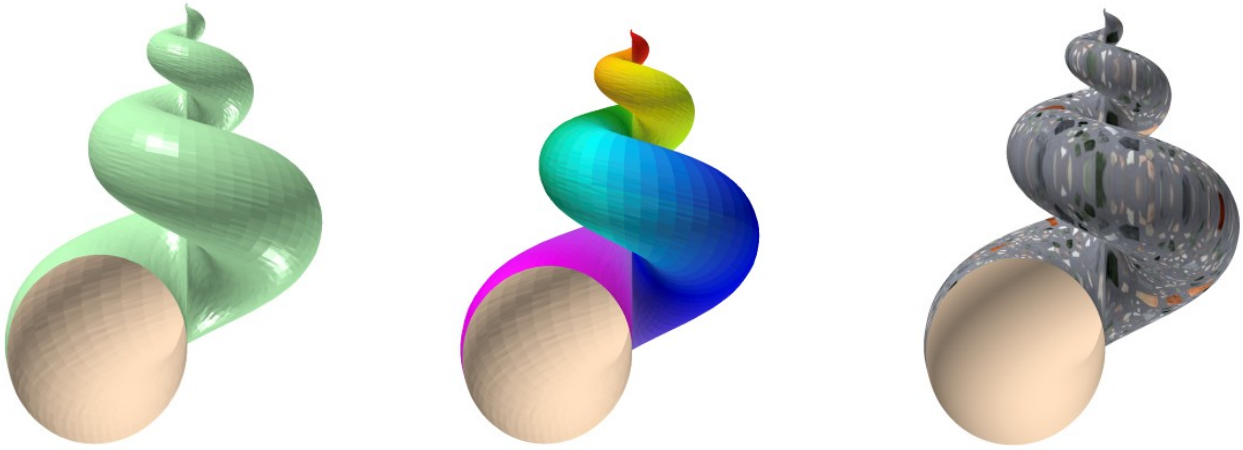

23.6.3 3D Apple

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D03a_Apple.3D.xml (D03a-c).

```
double R1 = 5.0;
double R2 = 4.8;
double su = Math.Sin(u);
double sv = Math.Sin(v);
double cu = Math.Cos(u);
double c5u = Math.Cos(5*u);
double cv = Math.Cos(v);
x = cu * (R1 + R2 * cv) + Math.Pow(v/Math.PI, 20);
z = su * (R1 + R2 * cv) + 0.25 * c5u;
y = -2.3 * Math.Log(1 - v * 0.3157) + 6 * sv + 2 * cv;
```

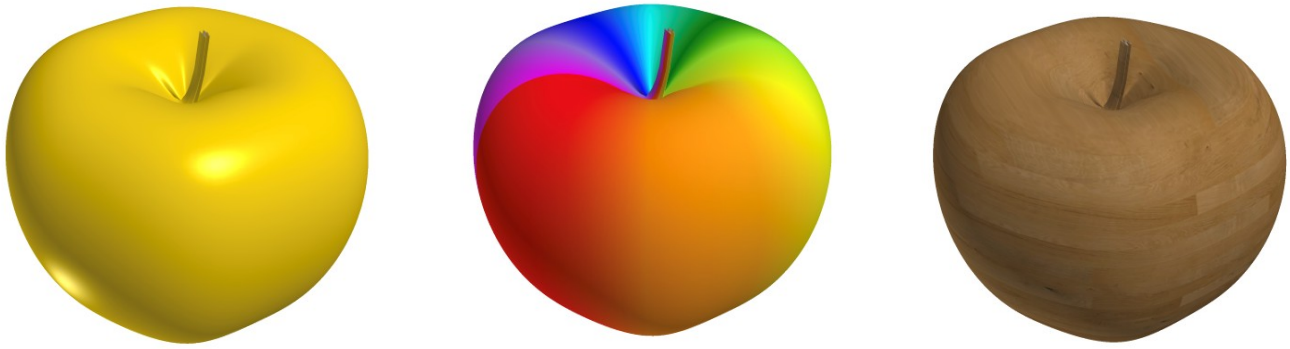

23.6.4 Bow curve

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D04a_BowCurve.3D.xml (D04a-c).

See also: http://paulbourke.net/geometry/toroidal/

```
double p2 = 2*Math.PI;
double p4 = 4*Math.PI;
double T = 0.5; //Thickness

x = (2 + T * Math.Sin(p2 * u)) * Math.Sin(p4 * v);
y = (2 + T * Math.Sin(p2 * u)) * Math.Cos(p4 * v);
z = T * Math.Cos(p2 * u) + 3 * Math.Cos(p2 * v);
```

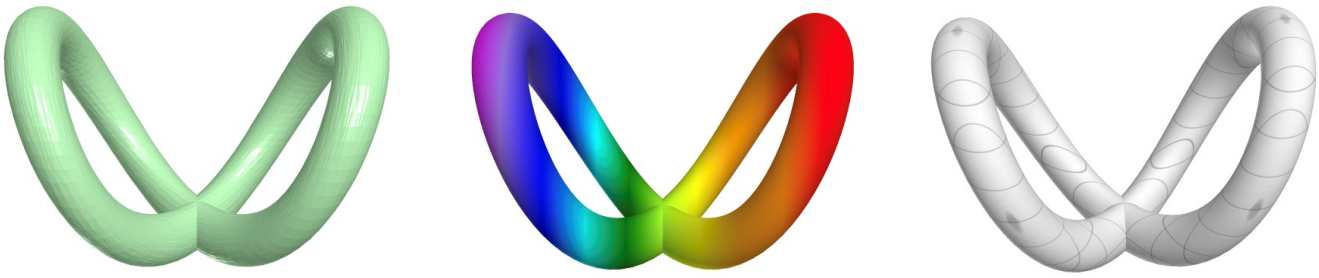

23.6.5 Fish Surface

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D05a_Fish.3D.xml (D05a-c).

See also: http://www.3d-meier.de/tut3/Seite47.html

See also Wikipedia [1359], MathWorld [1063].

```
double su = Math.Sin(u);
double s2u = Math.Sin(2*u);
double sv = Math.Sin(v);
double cu = Math.Cos(u);
double c2u = Math.Cos(2*u);
double cv = Math.Cos(v);
x = (cu - c2u) * cv / 4.0;
y = (su - s2u) * sv / 4.0;
z = cu;
```

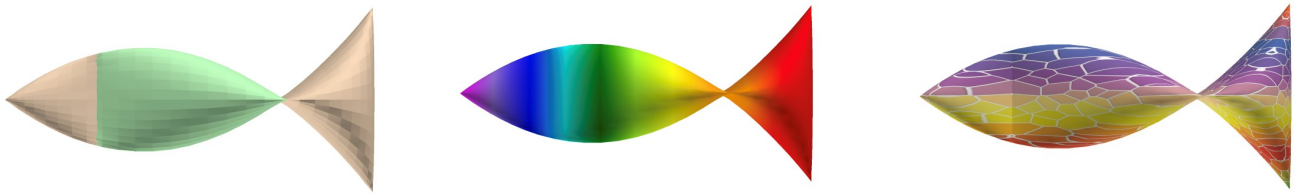

23.6.6 Bourke Horn

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D06a_BourkeHorn.3D.xml (D06a-c).

See also: http://paulbourke.net/geometry/spiral/

```
double p2 = 2*Math.PI;
x = (2 + u * Math.Cos(v)) * Math.Sin(p2 * u);
y = (2 + u * Math.Cos(v)) * Math.Cos(p2 * u) + 2 * u;
z = u * Math.Sin(v);
```

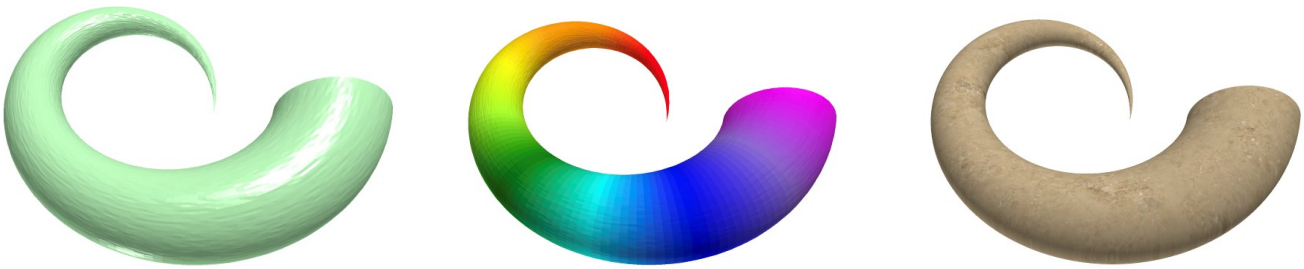

23.6.7 Hexa torus

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D07a_HexaTorus.3D.xml (D07a-c).

See also: http://paulbourke.net/geometry/toroidal/

The C# code for the Klein bottle:

```
double a = Math.Cos(u);
double b = Math.Sin(u);
double c = Math.Cos(v);
double a2 = a * a;
double a4 = a2 * a2;

x = -(2.0 / 15.0) * a * (3 * c + b * (-30 + a4 * (90 - 60 * a2) + 5 * a * c));
z = -(1.0 / 15.0) * b * b * (c * b * (3 - 48 * a4 + 5 * a * b * (1 - 16 * a4)) - 60);
y = (2.0 / 15.0) * (3 + 5 * a * b) * Math.Sin(v);
```

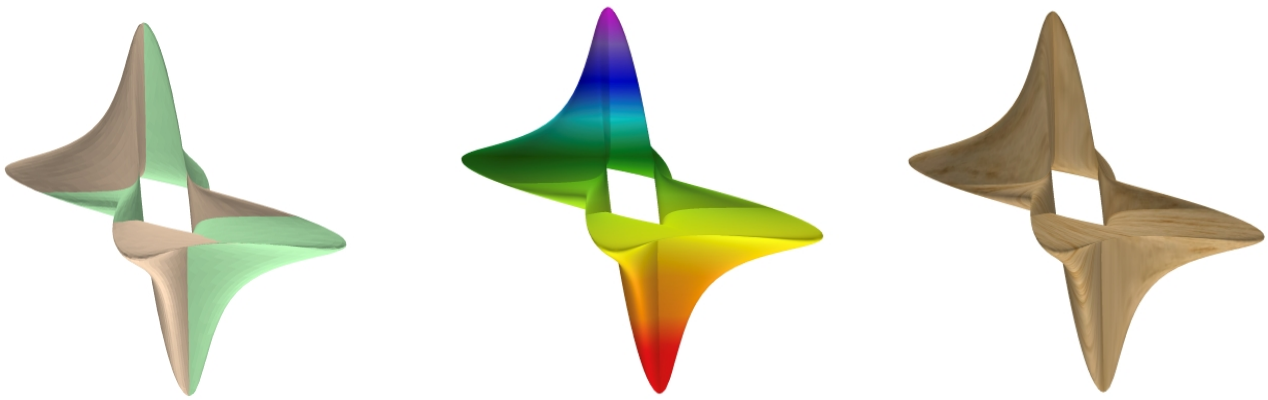

23.6.8 3D Breather Surface

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D08a_Breather.3D.xml (D08a-c).

See also: https://en.wikipedia.org/wiki/Breather_surface

See also: https://mathworld.wolfram.com/BreatherSurface.html

```
const double b = 0.4;
double r = 1 - b * b;
double w = Math.Sqrt(r);
double denom = b * (
    (w * Math.Cosh(b * u)) * (w * Math.Cosh(b * u)) +
    (b * Math.Sin(w * v)) * (b * Math.Sin(w * v)));

x = -u + (2 * r * Math.Cosh(b * u) * Math.Sinh(b * u)) / denom;
y = (2 * w * Math.Cosh(b * u) * (-(w * Math.Cos(v) * Math.Cos(w * v)) - Math.Sin(v) * Math.Sin(w * v))) / denom;
z = (2 * w * Math.Cosh(b * u) * (-(w * Math.Sin(v) * Math.Cos(w * v)) + Math.Cos(v) * Math.Sin(w * v))) / denom;
```

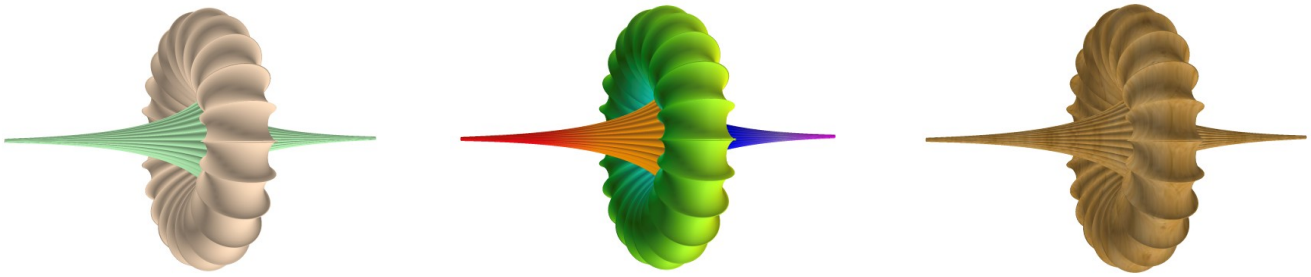

23.6.9 Kuen surface

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D09a_Kuen.3D.xml (D09a-c).

See also: https://mathworld.wolfram.com/KuenSurface.html

See also: https://virtualmathmuseum.org/Surface/kuen/kuen.html

See also: https://mathcurve.com/surfaces.gb/kuen/kuen.shtml

```
double a = 1.0 * Math.Sin(v);
double b = 1.0 + u * u * a * a;

x = 2.0 * a * (Math.Cos(u) + u * Math.Sin(u)) / b;
z = 2.0 * a * (Math.Sin(u) - u * Math.Cos(u)) / b;
y = Math.Log(Math.Tan(v / 2.0)) + 2.0 * Math.Cos(v) / b;
```

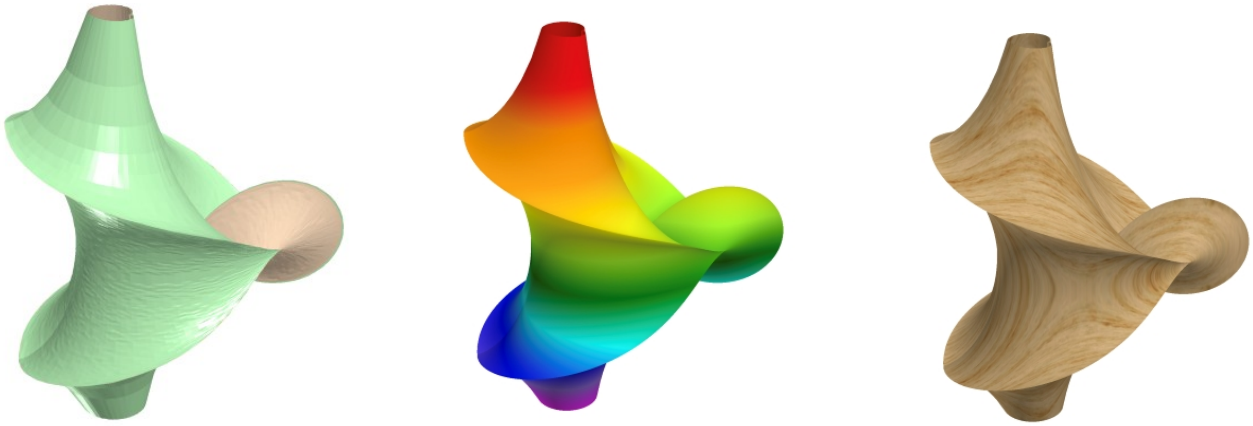

23.6.10 Tranguloid trefoil

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D10a_TranguloidTrefoil.3D.xml (D10a-c).

See also: http://paulbourke.net/geometry/tranguloid/

There are other parametrizations:

See also: http://www.3d-meier.de/tut3/Seite56.html See also: https://mathart.org/sw/GreenSnake/Toroid2.html

See also: http://www.3d-meier.de/tut3/Seite159.html

```
double p2 = 2*Math.PI/3;
x = 2 * Math.Sin(3 * u) / (2 + Math.Cos(v));
y = 2 * (Math.Sin(u) + 2 * Math.Sin(2 * u)) / (2 + Math.Cos(v + p2));
z = (Math.Cos(u) - 2 * Math.Cos(2 * u)) * (2 + Math.Cos(v)) * (2 + Math.Cos(v + p2)) / 4;
```

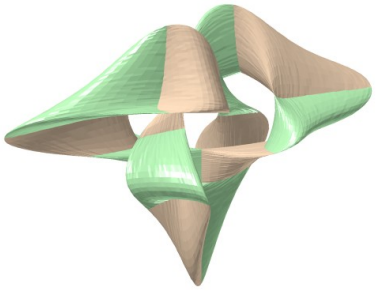
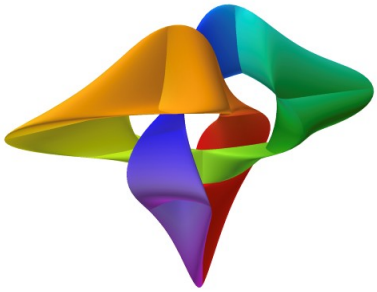

23.6.11 Triaxial teardrop

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D11a_TearDrop.3D.xml (D11a-c).

See also: http://paulbourke.net/geometry/triaxtear/

See also Wikipedia [1359], MathWorld [1063].

```
double p2 = 2*Math.PI/3;
x = ( 1 - Math.Cos(u) ) * Math.Cos(u + p2) * Math.Cos(v + p2) / 2;
y = -( 1 - Math.Cos(u) ) * Math.Cos(u + p2) * Math.Cos(v - p2) / 2;
z = Math.Cos(u - p2);
```

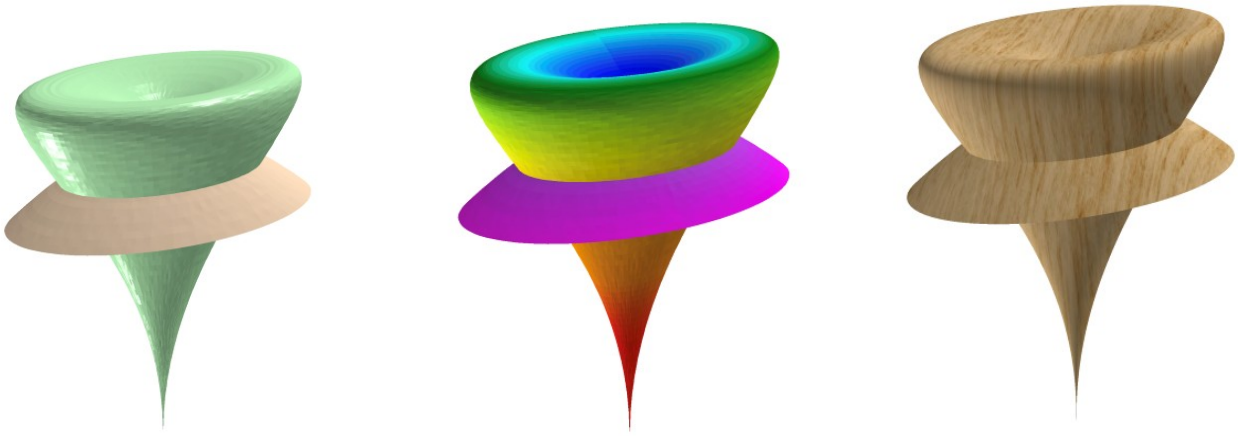

23.6.12 Gray Bottle

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D12a_GrayBottel.3D.xml (D12a-c).

See also: http://paulbourke.net/geometry/toroidal/

```
x = Math.Cos(v) * Math.Sqrt(Math.Abs(Math.Sin(2 * u))) * Math.Cos(u);
y = Math.Cos(v) * Math.Sqrt(Math.Abs(Math.Sin(2 * u))) * Math.Sin(u);
z = x*x - y*y + 2 * x * y * Math.Tan(v) * Math.Tan(v);
```

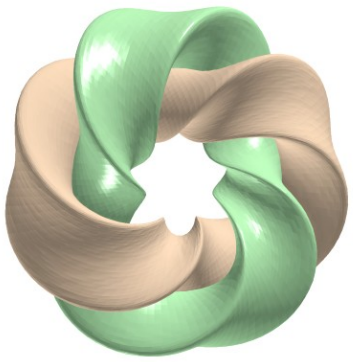

23.6.13 Surfaces mimicking snail shells

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D13a_Snail1.3D.xml (D13a-u).

See also: http://www.3d-meier.de/tut3/Seite89.html

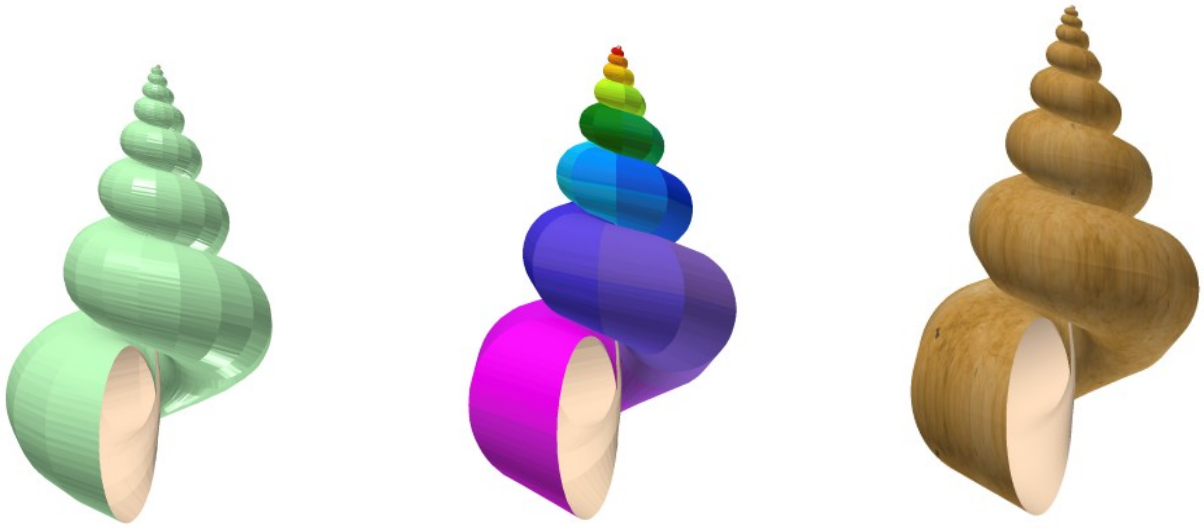

```
double R = 1;
double a = 1.6;
double b = 1.6;
double c = 1.0;
double h = 1.5;
double k = -7.0;
double w = 0.075;
//  umin = -50, umax = -1,    name:  Pseudoheliceras subcatenatum

double su = Math.Sin(u);
double scu = Math.Sin(c*u);
double sv = Math.Sin(v);
double cv = Math.Cos(v);
double ccu = Math.Cos(c*u);

double ewu = Math.Exp(w*u);

x = ewu * (h+a*cv) * ccu;
z = R * ewu * (h+a*cv) * scu;
y = ewu * (k + b * sv);
```

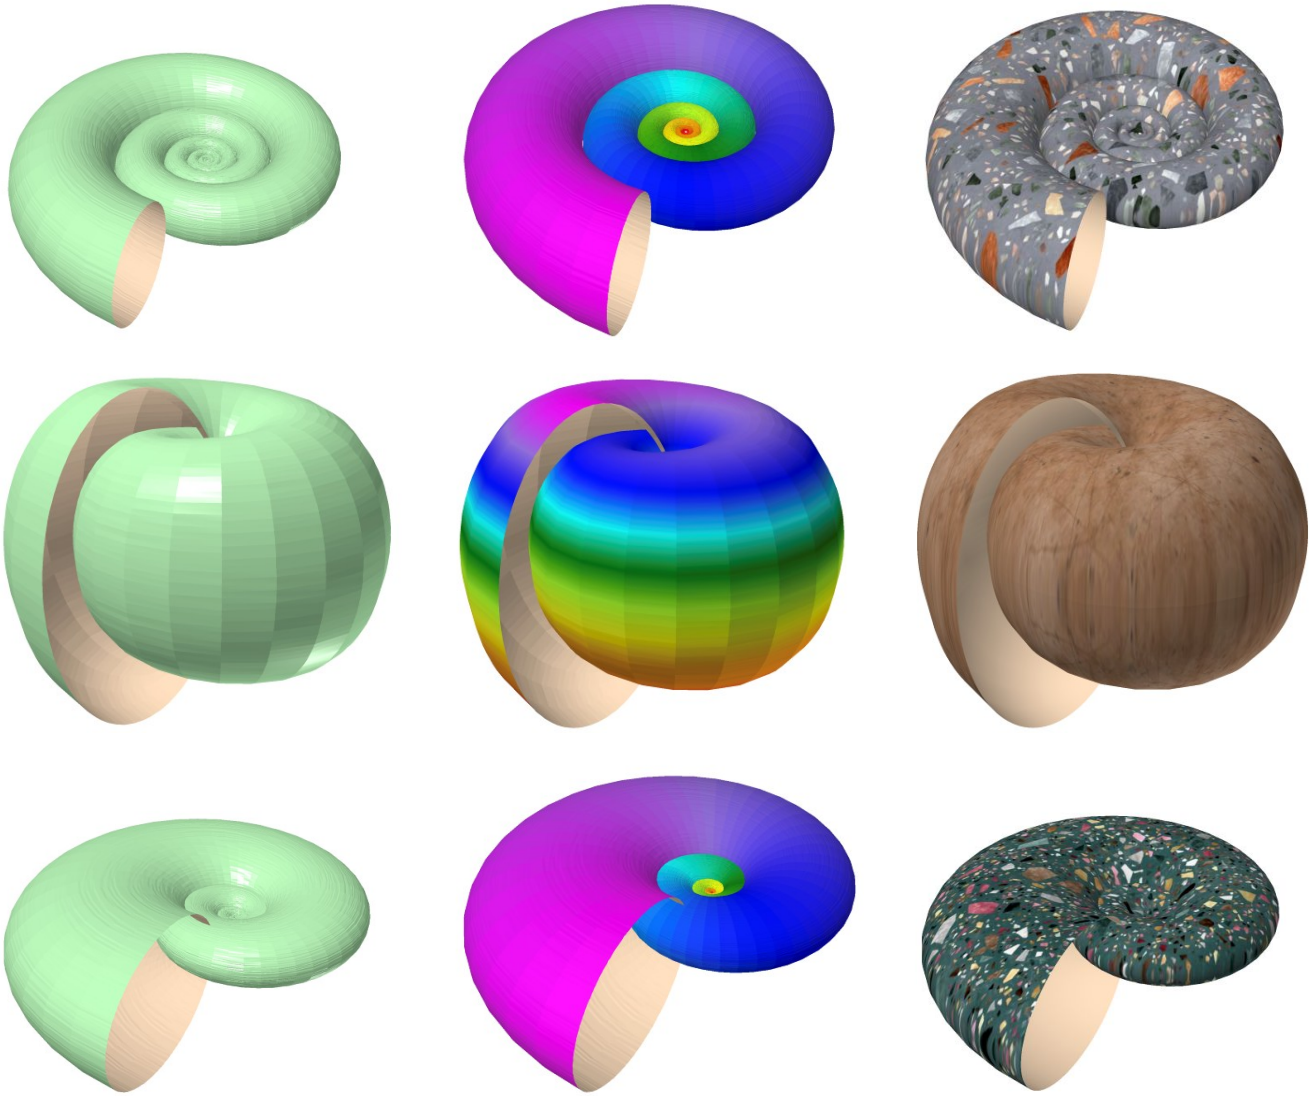

Left figure: Astroceras surface.

Middle figure: Bellerophina surface.

Right figure: Euhoplites Surface.

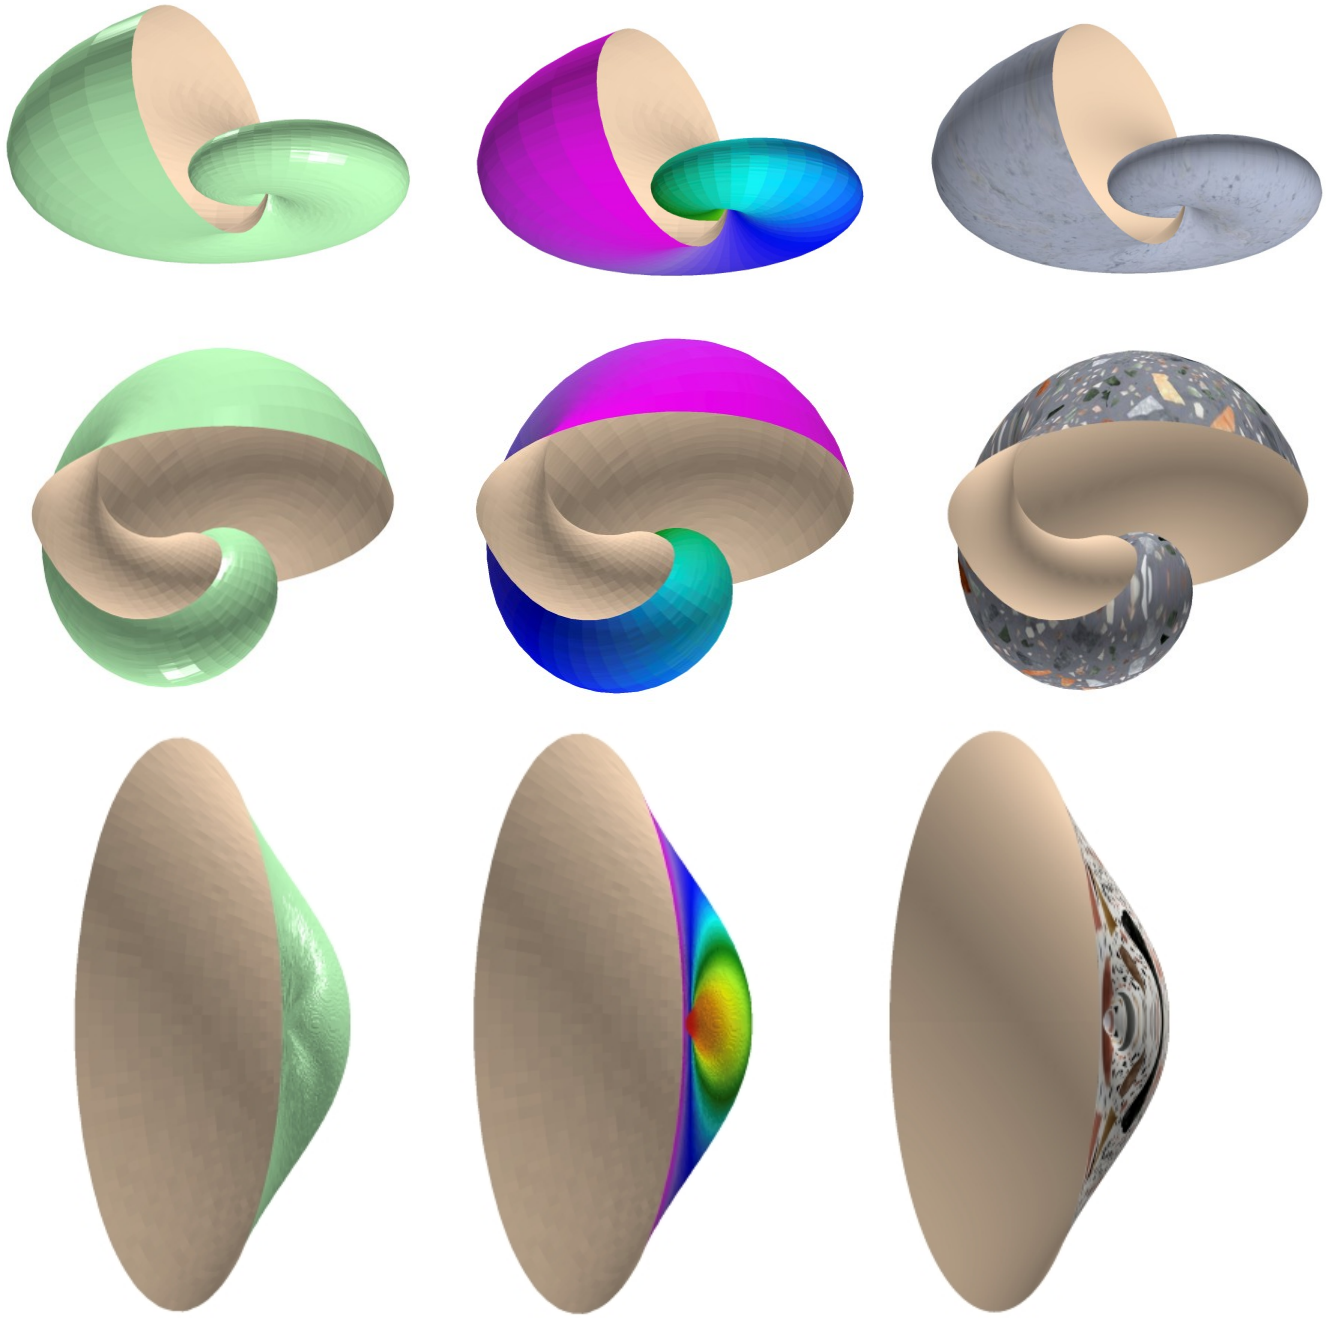

Left figure: Nautilus surface.

Middle figure: Natica stellata surface.

Right figure: Mya arenaria surface.

CHAPTER

TWENTYFOUR

WPF: PATH SURFACES IN 3D

Surfaces based on parametric curves: $x = f(t), y = g(t)\ [, z = h(t)]$

24.1 Introduction to path surfaces

24.1.1 Borromean rings, A, B, C

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D01a_Path_BorromeanA.3D.xml (D01a-c).

Some text explaining the importance of building the mesh in x-direction.

The example below uses the following code in C#, for A

```
var r = Math.Sqrt(3) / 3;
var x = Math.Cos(t);
var y = Math.Sin(t) + r;
var z = Math.Cos(3 * t) / 3;
```

The example below uses the following code in C#, for B

```
var r = Math.Sqrt(3) / 3;
var x = Math.Cos(t) + 0.5;
var y = Math.Sin(t) - r / 2;
var z = Math.Cos(3 * t) / 3;
```

The example below uses the following code in C#, for C

```
var r = Math.Sqrt(3) / 3;
var x = Math.Cos(t) - 0.5;
var y = Math.Sin(t) - r / 2;
var z = Math.Cos(3 * t) / 3;
```

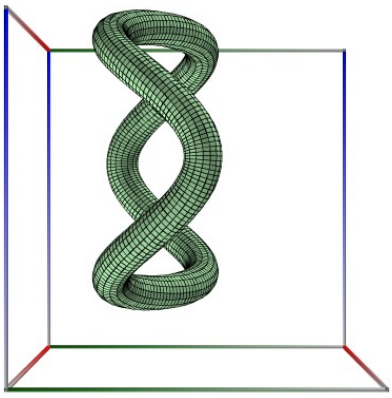

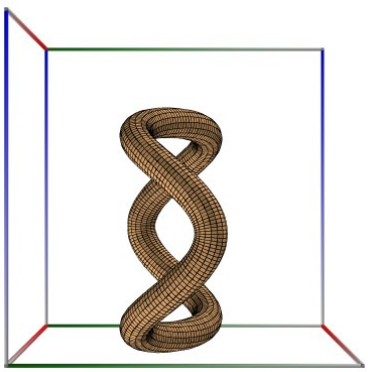

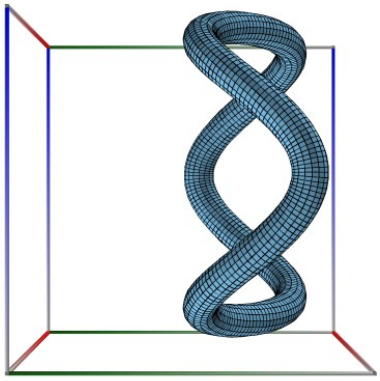

24.1.2 Ellipses, A, B, C

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D02a_Path_Ellipses.3D.xml (D01a-i).

Some text explaining the importance of building the mesh in x-direction.

The example below uses the following code in C#, for A, B, C

```
var x = 2 * Math.Cos(t);
var y = Math.Sin(t);
var z = 0.0;
```

For A, the final rotations are: X=0, Y=0, Z=0.

For B, the final rotations are: X=90, Y=0, Z=90.

For C, the final rotations are: X=0, Y=90, Z=90.

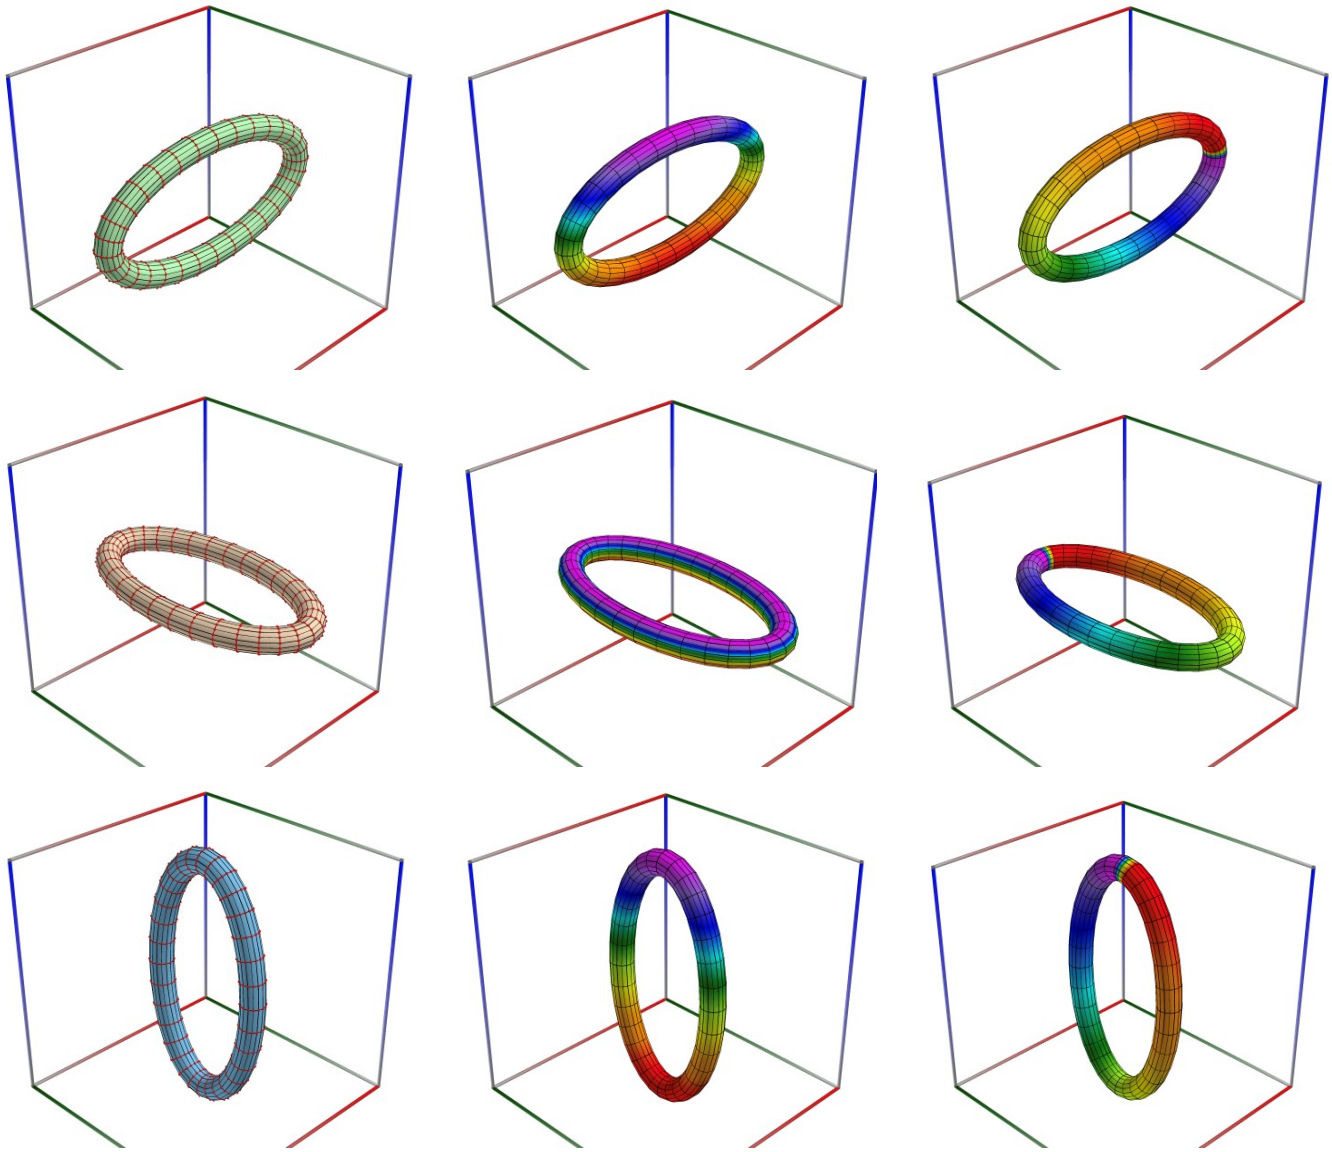

24.1.3 Trefoil 2

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D03a_Path_Trefoil02.3D.xml (D01a-c).

Some text explaining the importance of building the mesh in x-direction.

The example below uses the following code in C#, for A, B, C

```
var D = 2.0; //  D = 1.0;  D = 2.0;
var x = D * Math.Sin(t) + 2 * Math.Sin(2 * t);
var y = D * Math.Cos(t) - 2 * Math.Cos(2 * t);
var z = -D * Math.Sin(3 * t);
```

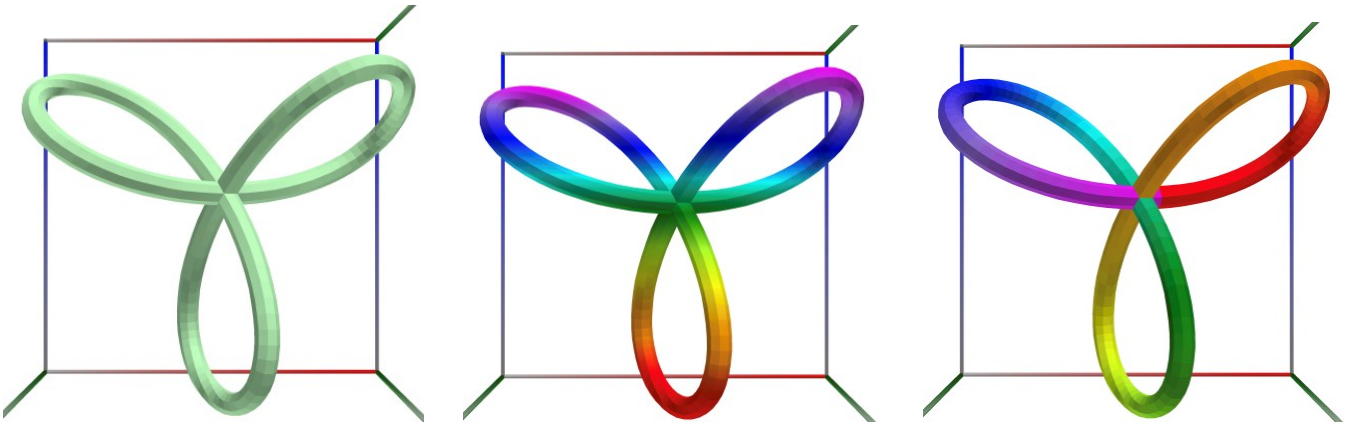

24.1.4 Formatting options for path surfaces, Trefoil 5

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D04a_Path_Trefoil05.3D.xml (D01a-f).

These are the rough versions

The example below uses the following code in C#, for A, B, C

```
var D = 1.0; //  D = 1.0;  D = 2.0;
var x = D * Math.Sin(t) + 2 * Math.Sin(2 * t);
var y = D * Math.Cos(t) - 2 * Math.Cos(2 * t);
var z = -D * Math.Sin(3 * t);
```

These are the rough versions

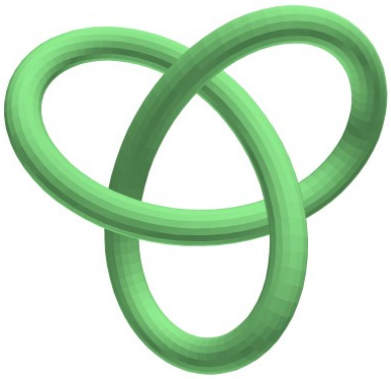
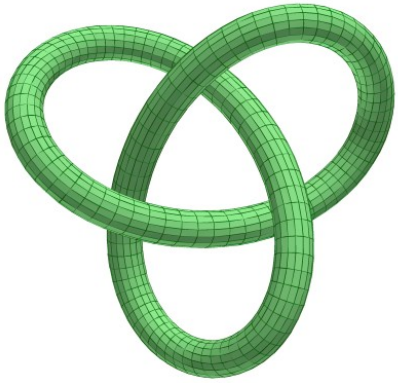
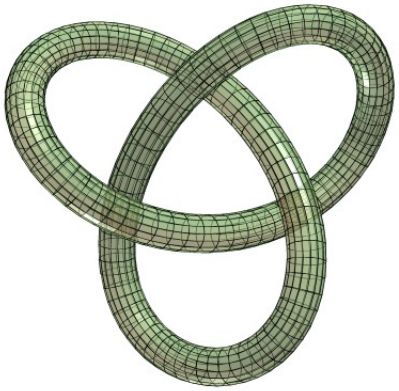

These are the smooth versions

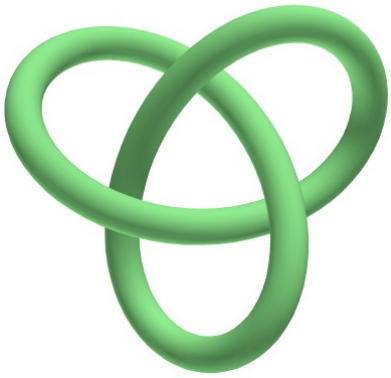
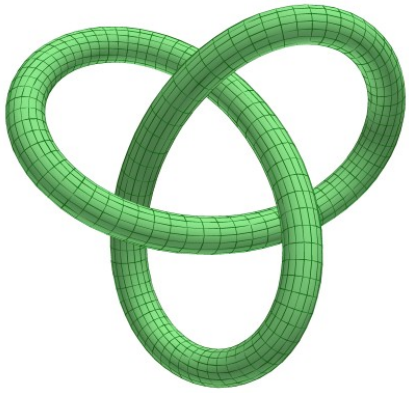
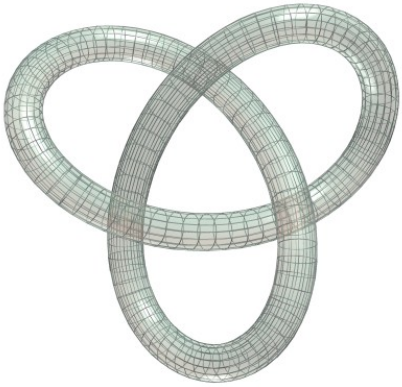

24.2 Functions with real input and complex results

24.2.1 Expj (Cis) function

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D01a_Path_Func_Expj_2Dx.3D.xml (D01a-e).

Returns $e^{iz} = \cos(z) + i\sin(z)$. See also Wikipedia [1367], MathWorld [1014].

The example below uses the following code in C#, for real part only

```
var y = Math.Sin(t);
var x = t;
var z = 0;
```

The example below uses the following code in C#, for imaginary part only

```
var z = -Math.Cos(t);
var x = t;
var y = 0;
```

The example below uses the following code in C#, for real and imaginary part combined

```
var x = Math.Sin(t);
var y = -Math.Cos(t);
var z = t;
```

Some text

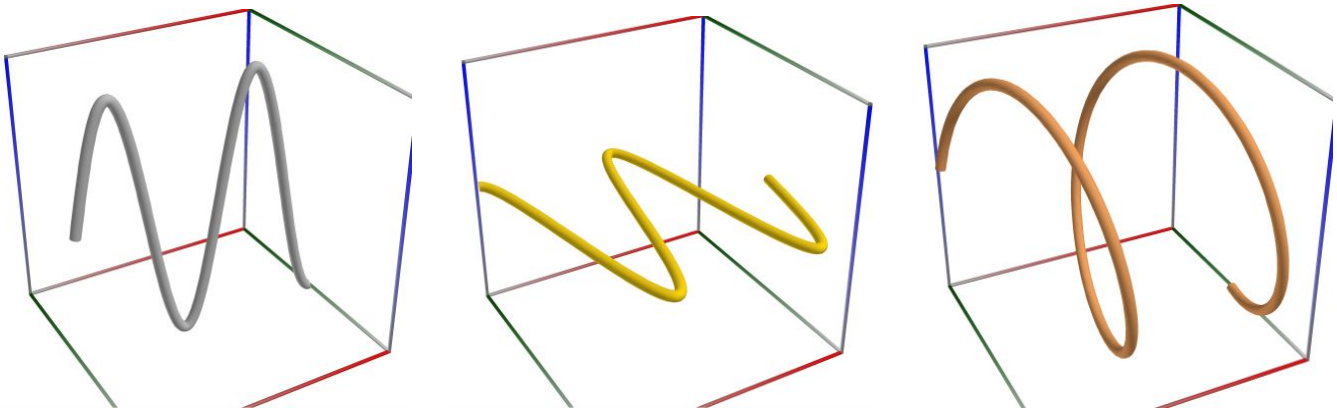

Left figure: Expj (Cis) function, real part only. Orthographic camera.

Middle figure: Expj (Cis) function, imaginary part only. Orthographic camera.

Right figure: Expj (Cis) function as full 3D curve. Orthographic camera.

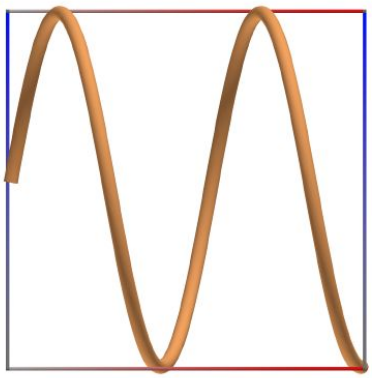

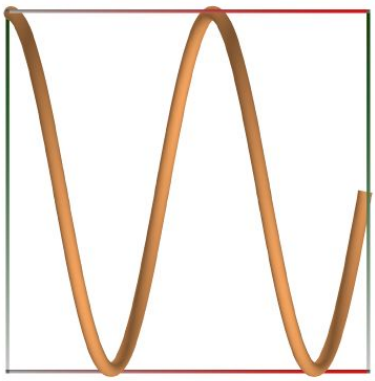

24.2.2 Hankel function of the first kind $H_{1,\nu}(x)$

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D02a_Path_Func_Hankel1_2Dx.3D.xml (D02a-c).

Returns the Hankel function of the first kind, defined as $H_\nu^{(1)}(x) = J_\nu(x) + iY_\nu(x)$.

See also Wikipedia [1300], MathWorld [935], NIST [441], BoostMath [115].

The example below uses the following code in C#, for real part only

```
var y = ctx.bessel_j0(t);
var x = t;
var z = 0;
```

The example below uses the following code in C#, for imaginary part only

```
var z = -ctx.bessel_y0(t);
var x = t;
var y = 0;
```

The example below uses the following code in C#, for real and imaginary part combined

```
var z = ctx.bessel_j0(t);
var y = -ctx.bessel_y0(t);
var x = t;
```

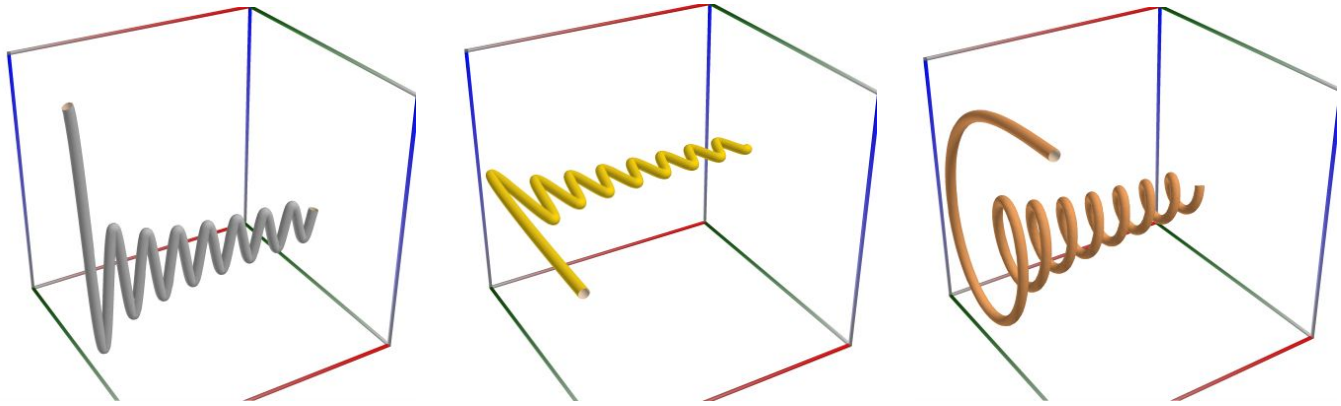

Left figure: Hankel function of the first kind $H_{1,\nu}(x)$, real part only. Orthographic camera.

Middle figure: Hankel function of the first kind $H_{1,\nu}(x)$, imaginary part only. Orthographic camera.

Right figure: Hankel function of the first kind $H_{1,\nu}(x)$, as full 3D curve. Orthographic camera.

24.2.3 Hankel function of the second kind $H_{2,\nu}(x)$

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D03a_Path_Func_Hankel2_2Dx.3D.xml (D03a-c).

Returns the Hankel function of the second kind, defined as $H_\nu^{(2)}(x) = J_\nu(x) - iY_\nu(x)$.

See also Wikipedia [1300], MathWorld [936], NIST [441], BoostMath [115].

The example below uses the following code in C#, for real part only

```
var y = ctx.bessel_j0(t);
var x = t;
var z = 0;
```

The example below uses the following code in C#, for imaginary part only

```
var z = ctx.bessel_y0(t);
var x = t;
var y = 0;
```

The example below uses the following code in C#, for real and imaginary part combined

```
var z = ctx.bessel_j0(t);
var y = ctx.bessel_y0(t);
var x = t;
```

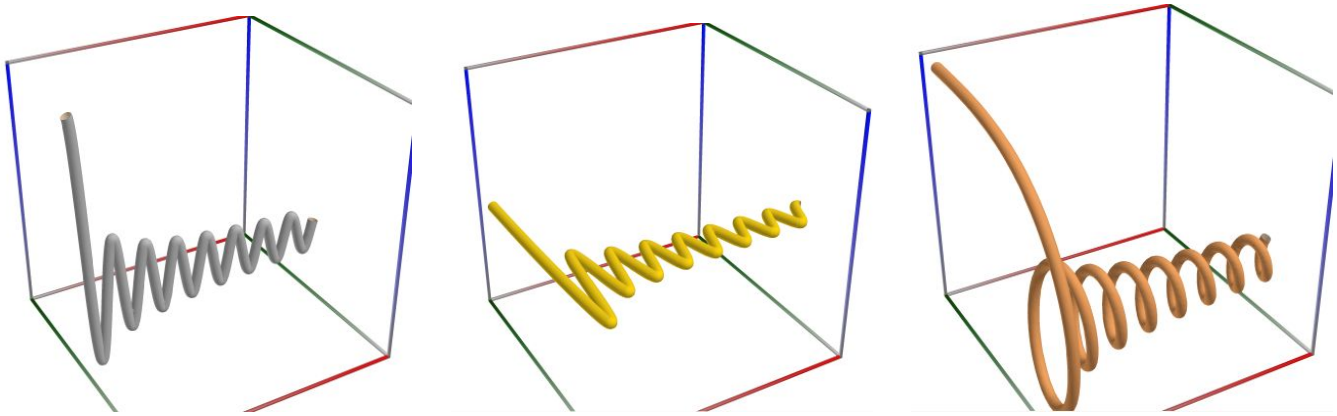

Left figure: Hankel function of the second kind $H_{2,\nu}(x)$, real part only. Orthographic camera.

Middle figure: Hankel function of the second kind $H_{2,\nu}(x)$, imaginary part only. Orthographic camera.

Right figure: Hankel function of the second kind $H_{2,\nu}(x)$, as full 3D curve. Orthographic camera.

24.2.4 Kelvin functions ber and bei

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D04a_Path_Func_KelvinBerBei_2Dx.3D.xml (D04a-c).

Returns the Kelvin functions ber bei. See also Wikipedia [1374], MathWorld [1017], NIST [442].

The following conventions are used as in Maple (with $a = \sqrt{2}/2$):

$$\text{ber}(\nu, x) + i\text{bei}(\nu, x) = J_\nu(x(-a + ia))$$

$$\text{ber}(\nu, x) - i\text{bei}(\nu, x) = J_\nu(x(-a - ia))$$

The example below uses the following code in C#, for the real part only

```
var a = ctx.exp(t / ctx.sqrt(2));
var x = t;
var y = 0;
var z = ctx.kelvin_ber(1,t) / a;
```

The example below uses the following code in C#, for the imaginary part only

```
var a = ctx.exp(t / ctx.sqrt(2));
var x = t;
var y = ctx.kelvin_bei(1,t) / a;
var z = 0;
```

The example below uses the following code in C#, for the real and imaginary parts combined

```
var a = ctx.exp(t / ctx.sqrt(2));
var x = t;
var y = ctx.kelvin_bei(1,t) / a;
var z = ctx.kelvin_ber(1,t) / a;
```

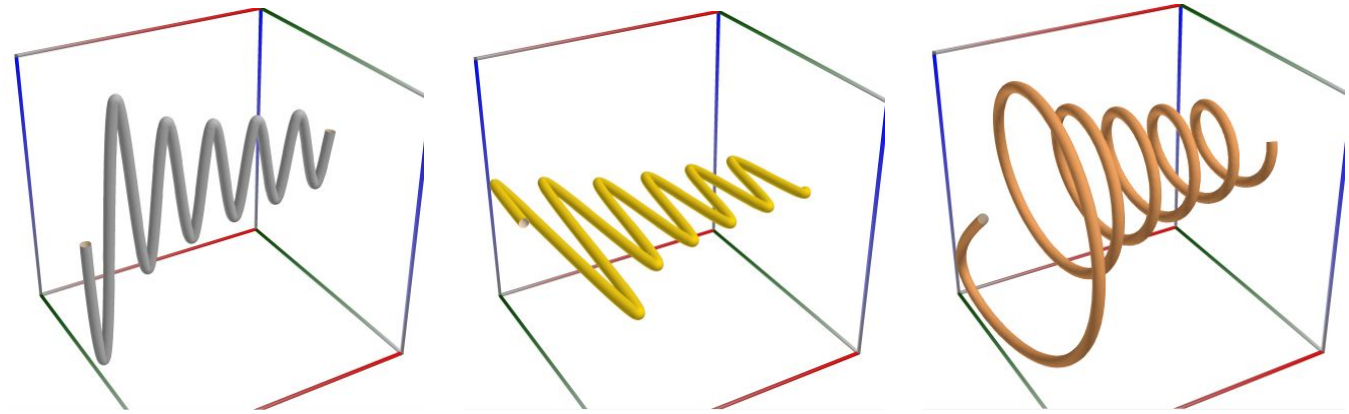

Left figure: Kelvin functions ber. Orthographic camera.

Middle figure: Kelvin function bei. Orthographic camera.

Right figure: Kelvin functions ber and bei, as full 3D curve. Orthographic camera.

24.2.5 Kelvin functions ker and kei

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D05a_Path_Func_KelvinKerKei_2Dx.3D.xml (D05a-c).

Returns the Kelvin function ker. See also Wikipedia [1376], MathWorld [1019], NIST [442].

The following conventions are used as in Maple (with $a = \sqrt{2}/2$):

$$\text{ker}(\nu, x) + i\text{kei}(\nu, x) = e^{-i\nu\pi/2} K_\nu(x(a + ia))$$

$$\text{ker}(\nu, x) - i\text{kei}(\nu, x) = e^{i\nu\pi/2} K_\nu(x(a - ia))$$

The example below uses the following code in C#, for real part only

```
var a = ctx.exp(t / ctx.sqrt(2));
var x = t;
var y = 0;
var z = ctx.kelvin_ker(0,t) * a;
```

The example below uses the following code in C#, for imaginary part only

```
var a = ctx.exp(t / ctx.sqrt(2));
var x = t;
var y = ctx.kelvin_kei(0,t) * a;
var z = 0;
```

The example below uses the following code in C#, for real and imaginary part combined

```
var a = ctx.exp(t / ctx.sqrt(2));
var x = t;
var y = ctx.kelvin_kei(0,t) * a;
var z = ctx.kelvin_ker(0,t) * a;
```

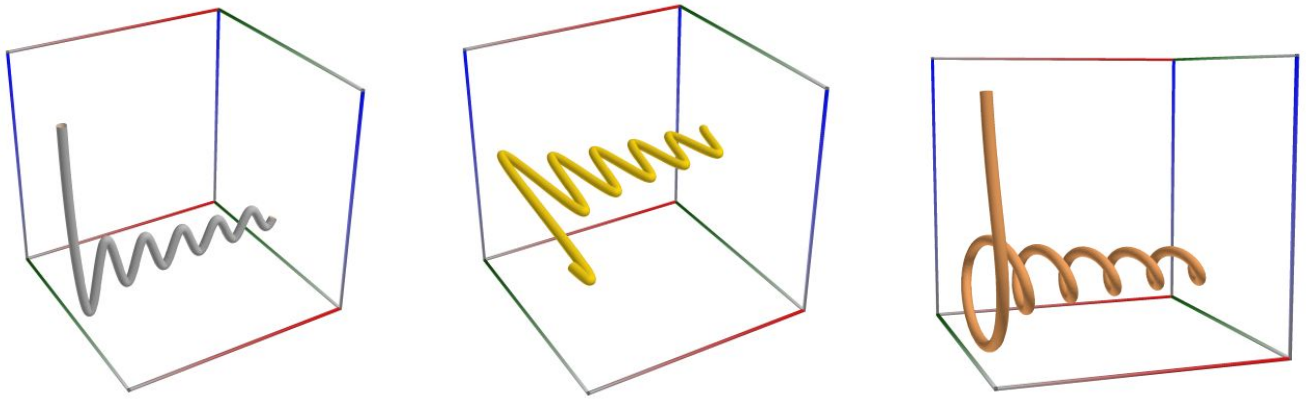

Left figure: Kelvin functions ker. Orthographic camera.

Middle figure: Kelvin function kei. Orthographic camera.

Right figure: Kelvin functions ker and kei, as full 3D curve. Orthographic camera.

24.3 Characteristic functions of statistical distributions

24.3.1 Uniform distribution

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D01a_CfUniform.3D.xml (D01a-c).

The uniform distribution is a continuous probability distribution on the support interval $[a, b]$ with finite $a < b$. See also Wikipedia [1188], MathWorld [834], BoostMath [89], Witkovský [1471], R (Statistical System) [534].

Returns $C_X(t)$, the characteristic function of a random variable X, following a uniform distribution:

$$C_X(t) = \frac{e^{itb} - e^{ita}}{it(b-a)}, \quad \text{for } t \neq 0, 0 \text{ otherwise.}$$

The example below uses the following code in C#

```
double a = 0.0;
double b = 1.0;
Complex i1 = Complex.ImaginaryOne;
Complex fz = 1.0;
if (t != 0.0)
{
    fz = Complex.Exp(i1 * t * b) - Complex.Exp(i1 * t * a);
    fz /= (i1 * t * (b - a));
}
var y = fz.Real;
var z = -fz.Imaginary;
var x = t;
```

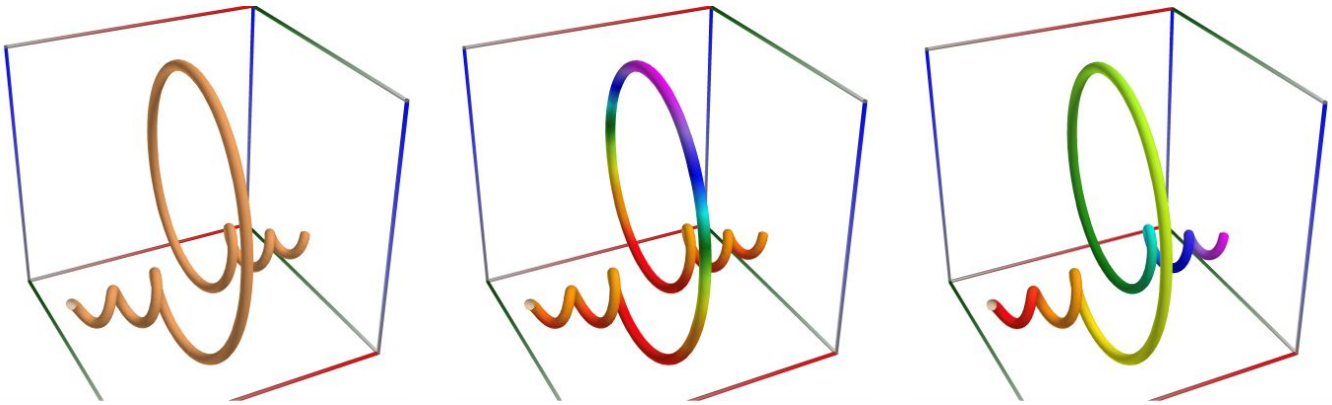

Left figure: Characteristic function of the uniform distribution, with $a = 0.0$, $b = 1.0$, $t_0 = -20.0$ and $t_1 = 20.0$. Perspective camera.

24.3.2 Normal distribution

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D02a_Path_Func_CfNormal.3D.xml (D02a-c).

The normal distribution is a continuous probability distribution with mean $\mu \in \mathbb{R}$, standard deviation $\sigma > 0$, and the support interval $(-\infty, +\infty)$. See also Wikipedia [1161], MathWorld [829], BoostMath [67], R (Statistical System) [524], Mpmath [541], Mpmath [537].

Returns $C_X(t)$, the characteristic function of a random variable X, following a normal distribution:

$$C_X(t) = \exp\left(i\mu t - \tfrac{1}{2}\sigma^2 t^2\right).$$

The example below uses the following code in C#

```
double mu = 10.0;
double sigma = 1.0;
Complex i1 = Complex.ImaginaryOne;
Complex fz = Complex.Zero;
fz = Complex.Exp(i1 * t * mu - 0.5 * sigma * sigma * t * t);
var y = fz.Real;
var z = -fz.Imaginary;
var x = t;
```

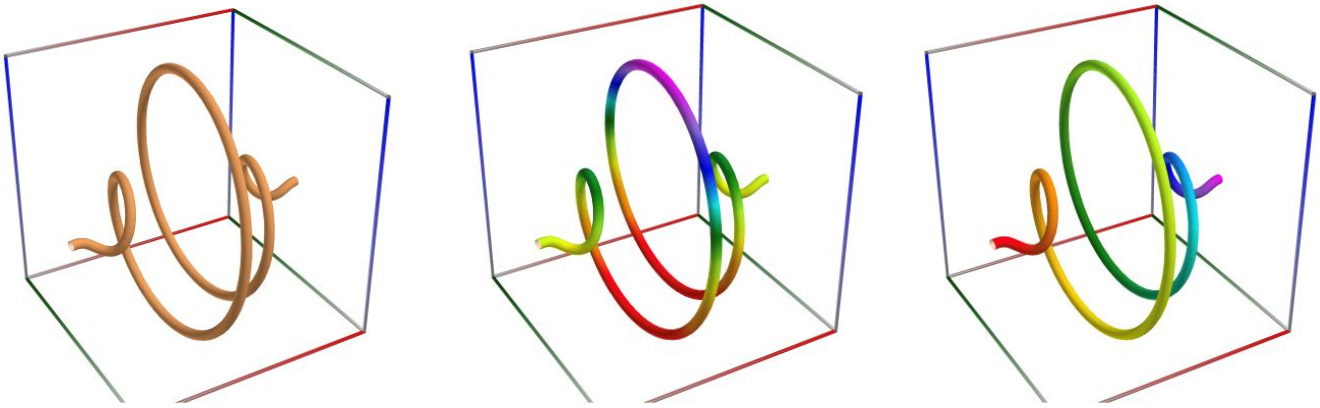

Left figure: Characteristic function of the normal distribution, with $\mu = 10$, $\sigma = 1$, $t_0 = -2.0$ and $t_1 = 2.0$. Perspective camera.

24.3.3 Chi-squared distribution

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D03a_Path_Func_CfChiSquared.3D.xml (D03a-c).

The chi-squared distribution is a continuous probability distribution with $n > 0$ degrees of freedom and the support interval $(0, +\infty)$. See also Wikipedia [1143], MathWorld [792], BoostMath [53], Witkovský [1457], R (Statistical System) [519].

Returns $C_X(t)$, the characteristic function of a random variable X, following a chi-squared distribution:

$$C_X(t) = (1 - 2it)^{-n/2}.$$

The example below uses the following code in C#

```
double nu = 100.0;
Complex i1 = Complex.ImaginaryOne;
Complex fz = Complex.Zero;
fz = Complex.Pow(1 - 2 * i1 * t, -nu / 2);
var x = fz.Real;
var y = -fz.Imaginary;
var z = t;
```

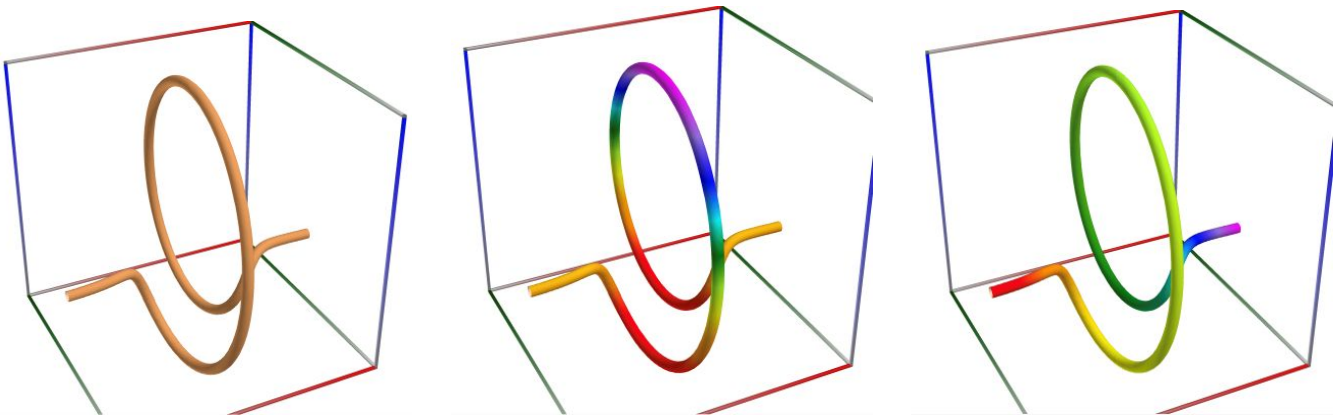

Left figure: Characteristic function of the chi-squared distribution, with $n = 100$, $t_0 = -0.2$ and $t_1 = 0.2$. Perspective camera.

24.3.4 Beta distribution

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D04a_Path_Func_CfBeta.3D.xml (D04a-c).

The beta distribution is a continuous probability distribution with parameters $a > 0$, $b > 0$, and the support interval $(0, 1)$. See also Wikipedia [1141], MathWorld [791], BoostMath [51], Witkovský [1456], R (Statistical System) [517].

Returns $C_X(t)$, the characteristic function of a random variable X, following a beta distribution:

$$C_X(t) = {}_1F_1(a, a + b; it).$$

where ${}_1F_1()$ is Kummer's confluent hypergeometric function (of the first kind).

The example below uses the following code in C#

```
double a = 10.0;
double b = 20.0;
Complex i1 = Complex.ImaginaryOne;
var fz = dcplx.zero();
fz = cmath53.hyperg_1f1(a, a + b, i1 * t);
var y = fz.Real;
var z = -fz.Imaginary;
var x = t;
```

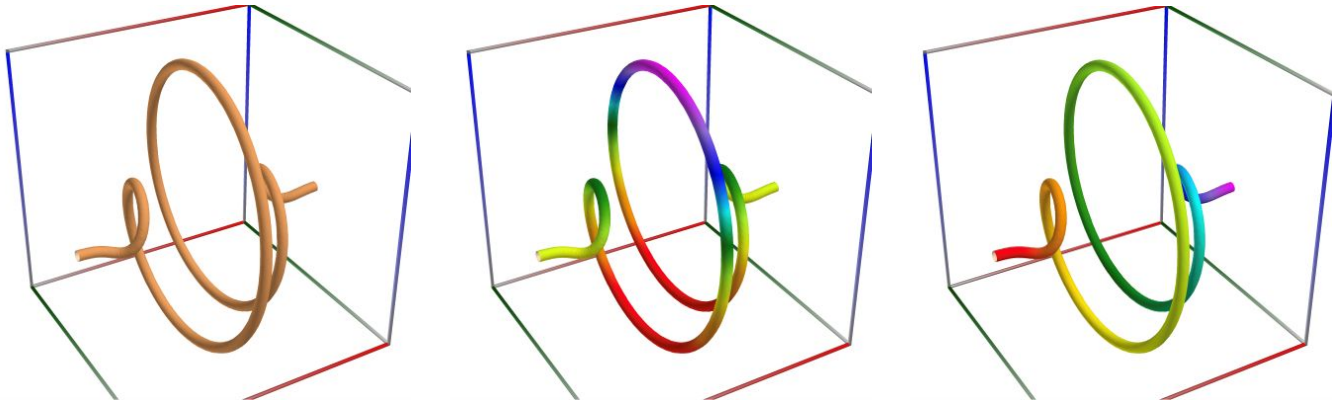

Left figure: Characteristic function of the beta distribution, with $a = 10$, $b = 20$, $t_0 = -40.0$ and $t_1 = 40.0$. Perspective camera.

24.3.5 F distribution

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D05a_Path_Func_CfFisherF.3D.xml (D05a-c).

The Fisher F-distribution is a continuous probability distribution with $m > 0$ and $n > 0$ degrees of freedom, and the support interval $(0, +\infty)$. See also Wikipedia [1146], MathWorld [795], BoostMath [56], Witkovský [1459], R (Statistical System) [521], Abramowitz and Stegun. [3], Butler and Paolella [166], Chattamvelli and Jones [175], Witkovský [1453].

Returns $C_X(t)$, the characteristic function of a random variable X, following a central Fisher F distribution:

$$C_X(t) = \int_0^\infty e^{itx} \text{pdf}_X(x) \text{d}x = \frac{\Gamma(m/2 + n/2)}{\Gamma(n/2)} U\left(\frac{m}{2}, 1 - \frac{n}{2}, -\frac{n}{m} it\right)$$

where $U(\cdot)$ denotes the confluent hypergeometric function of the second kind.

The example below uses the following code in C#

```
double nu = 21.0;
double mu = 40.0;
double G = ctx.gamma(mu / 2 + nu / 2) / ctx.gamma(nu / 2);
Complex i1 = Complex.ImaginaryOne;
var fz = dcplx.zero();
fz = G * cmath53.hyperg_u(mu / 2, 1 - nu / 2, -(nu / mu) * i1 * t);
var y = fz.Real;
var z = -fz.Imaginary;
var x = t;
```

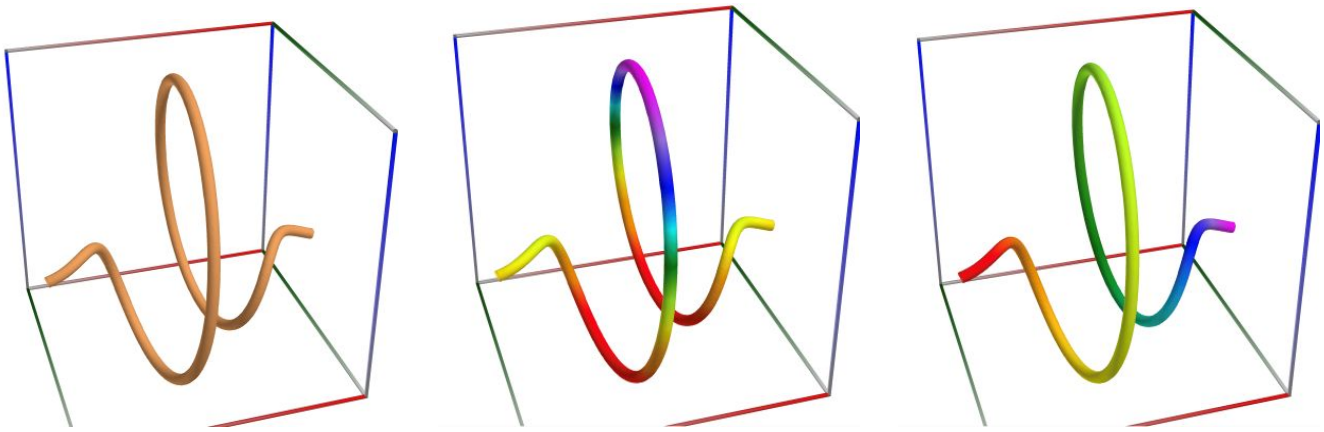

Left figure: Characteristic function of the Fisher F-distribution, with $m = 40$, $n = 20$, $t_0 = -20.0$ and $t_1 = 20.0$. Perspective camera.

24.3.6 Non-central Chi-squared distribution

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D06a_Path_Func_CfChiSquaredNc.3D.xml (D06a-c).

The noncentral chi-square distribution is a continuous probability distribution with degrees of freedom $n > 0$, noncentrality parameter λ_1, and support interval $(0, \infty)$. See also Wikipedia [1159], MathWorld [804], Patnaik [462], Penev and Raykov [464], Wang and Gray [789], Winterbottom [1447], BoostMath [64], Witkovský [1467], Johansson [384], R (Statistical System) [514], Yu [1491].

Returns $C_X(t)$, the characteristic function of a random variable X, following a non-central chi-squared distribution:

$$C_X(t) = \exp\left(\frac{i\lambda t}{1-2it}\right)(1-2it)^{-n/2}.$$

The example below uses the following code in C#

```
double nu = 10.0;
double lambda1 = 50.0;
Complex i1 = Complex.ImaginaryOne;
Complex fz = Complex.Zero;
fz = Complex.Pow(1 - 2 * i1 * t, -nu / 2);
fz *= Complex.Exp((i1 * t * lambda1) / (1 - 2 * i1 * t));
var y = fz.Real;
var z = -fz.Imaginary;
var x = t;
```

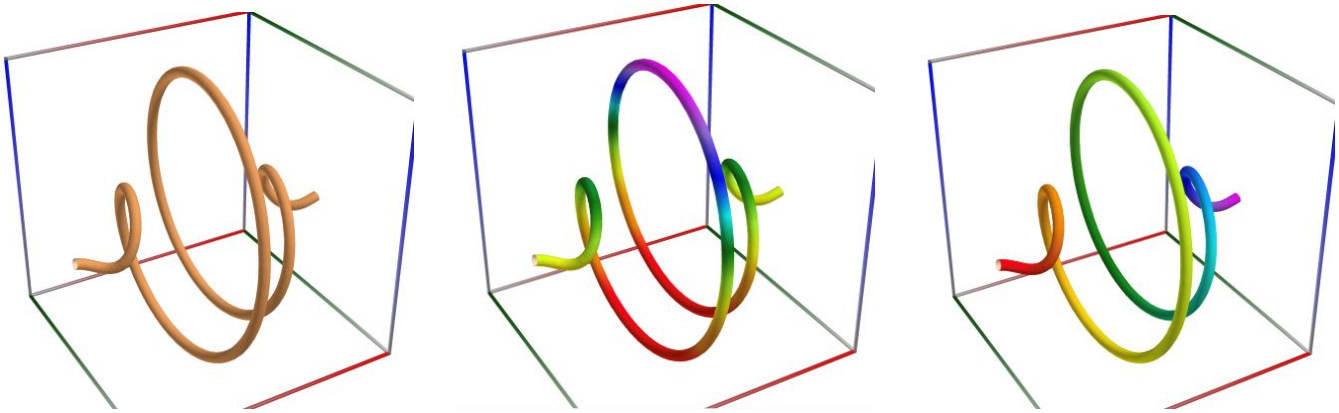

Left figure: Characteristic function of the noncentral chi-square distribution, with $\lambda = 50$, $n = 10$, $t_0 = -0.2$ and $t_1 = 0.2$. Perspective camera.

24.3.7 Binomial distribution

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D07a_Path_Func_CfBinomial.3D.xml (D07a-c).

The binomial distribution is a discrete (lattice) probability distribution with number of trials $n \geq 0$ and success probability $0 \leq p \leq 1$. See also Wikipedia [1168], MathWorld [812], BoostMath [71], Witkovský [1475], R (Statistical System) [528].

Returns $C_X(t)$, the characteristic function of a random variable X, following an binomial distribution:

$$C_X(t) = \left(Pe^{it} + Q\right)^n .$$

The example below uses the following code in C#

```
double n1 = 20.0;
double p = 0.5;
Complex i1 = Complex.ImaginaryOne;
Complex fz = Complex.Zero;
fz = Complex.Pow(1 - p + p * Complex.Exp(i1 * t), n1);
var x = fz.Real;
var y = -fz.Imaginary;
var z = t;
```

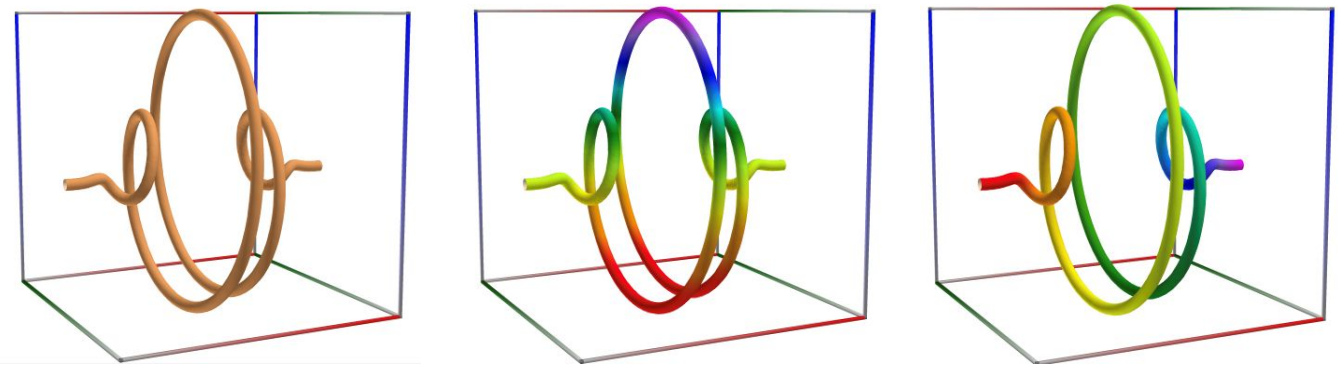

Left figure: Characteristic function of the binomial distribution, with $p = 0.5$, $n = 20$, $t_0 = -2.0$ and $t_1 = 2.0$. Perspective camera.

24.3.8 Hypergeometric distribution

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D08a_Path_Func_CfHypergeo.3D.xml (D08a-c).

The hypergeometric distribution is a discrete (lattice) probability distribution with k successes (random draws for which the object drawn has a specified feature) in $n \in \{0, 1, 2, \ldots, N\}$ draws, without replacement, from a finite population of size $N \in \{0, 1, 2, \ldots\}$‘ that contains exactly $K \in \{0, 1, 2, \ldots, N\}$ objects with that feature, wherein each draw is either a success or a failure, and the support interval $(\max(0, n + K - N), \min(K, n))$. See also Wikipedia [1174], MathWorld [820], BoostMath [78], R (Statistical System) [530], Berkopec [31], Johnson *et al.* [387] page 251.

Returns $C_X(t)$, the characteristic function of a random variable X, following an hypergeometric distribution:

$$C_X(t) = {}_2F_1(-n, -K; N - K - n + 1; e^{it}) \binom{N-K}{n} \Big/ \binom{N}{n}.$$

where ${}_2F_1(\cdot)$ is the Gauss hypergeometric function.

The example below uses the following code in C#

```
int N = 50;
int K = 16;
int n1 = 12;
Complex i1 = Complex.ImaginaryOne;
var fz = dcplx.zero();
fz = cmath53.hyperg_2f1(-n1, -K, N - K - n1 + 1, cmath53.exp(i1 * t));
fz = fz * ctx.binomial(N - K, n1) / ctx.binomial(N, n1);
var x = fz.Real;
var y = -fz.Imaginary;
var z = t;
```

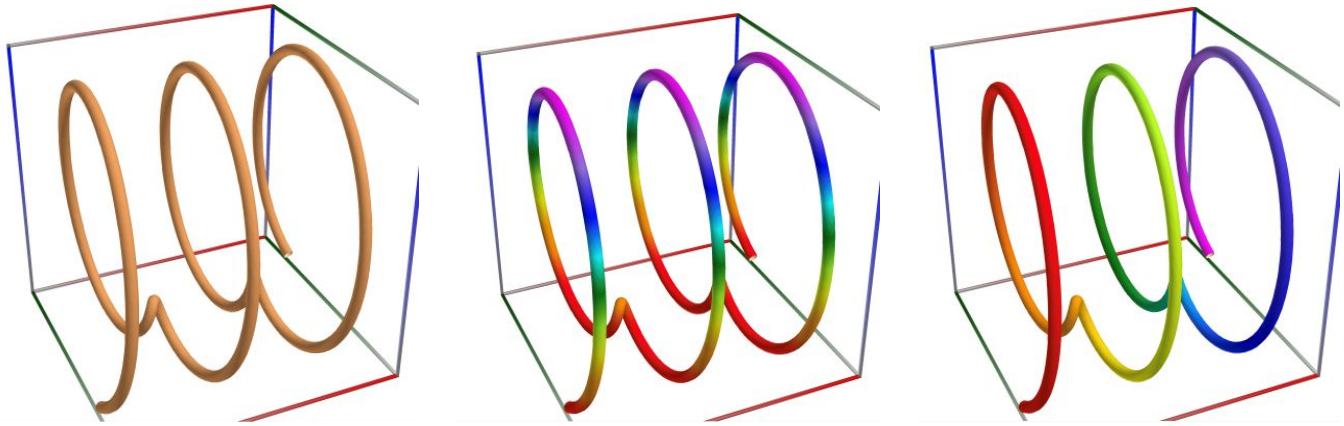

Left figure: Characteristic function of the hypergeometric distribution, with $N = 50$, $K = 16$, $n = 12$, $t_0 = -10.0$ and $t_1 = 10.0$. Perspective camera.

24.4 Helices and related curves traced on cylinders, cones and spheres

See also: https://en.wikipedia.org/wiki/Helix

See also: https://mathworld.wolfram.com/Helix.html

See also: https://mathcurve.com/courbes3d.gb/helice/helice.shtml

The helices are the curves the tangents of which form a constant angle a with respect to a fixed plane (P0), or a fixed direction d (orthogonal to (P0)). Therefore, the notion of helix in mathematics is more connected to a mountain road with constant slope than to the helix of a boat!

Examples (note that the helices are described by their base or the surface on which they are traced):

- the straight line (lines on a surface are therefore helices of this surface)
- the cylindrical helix (base = circle)
- the conical helix (traced on a vertical cone of revolution, base = logarithmic spiral)
- the elliptic helix (base = ellipse)
- the spherical helix (traced on a sphere, base = epicycloid)
- the helix of the paraboloid (base = involute of a circle).
- the helix of the one-sheeted hyperboloid (traced on the one-sheeted hyperboloid)
- the striction line of the milk carton

NOTE: the item “H. Stop of y, v [STOP2]” determines the diameter of the helix.

24.4.1 Cylindrical helix

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D01a_Path_SpiralCylindrical.3D.xml (D01a-f).

See also: https://mathcurve.com/courbes3d.gb/helicecirculaire/helicecirculaire.shtml

The cylindrical helix can be defined as a helix traced on a vertical cylinder of revolution, or a rhumb line of this cylinder (i.e., in both cases, a curve forming a constant angle with respect to the axis of the cylinder), or a geodesic of this cylinder (in other words, a curve that becomes a line when the cylinder is developed) or a solenoid with linear bore. Intrinsic characterization: constant curvature and torsion.

The radius of the helix is a, and its shift is (it is the distance between two consecutive coils) and b is sometimes called reduced shift of the helix. The angle of the helix is the constant angle (equal to) formed by its tangent with respect to any plane orthogonal to Oz. The helix is right-handed when e = 1 (it "goes up" counterclockwise and an observer located outside of it sees it going up from left to right) and left-handed when e = - 1 (it "goes up" clockwise).

The example below uses the following code in C#

```
double a = 0.2;
// double b = 1.0;
double b = 0.2;
var x = a * Math.Cos(t);
var y = a * Math.Sin(t);
var z = b * t;
```

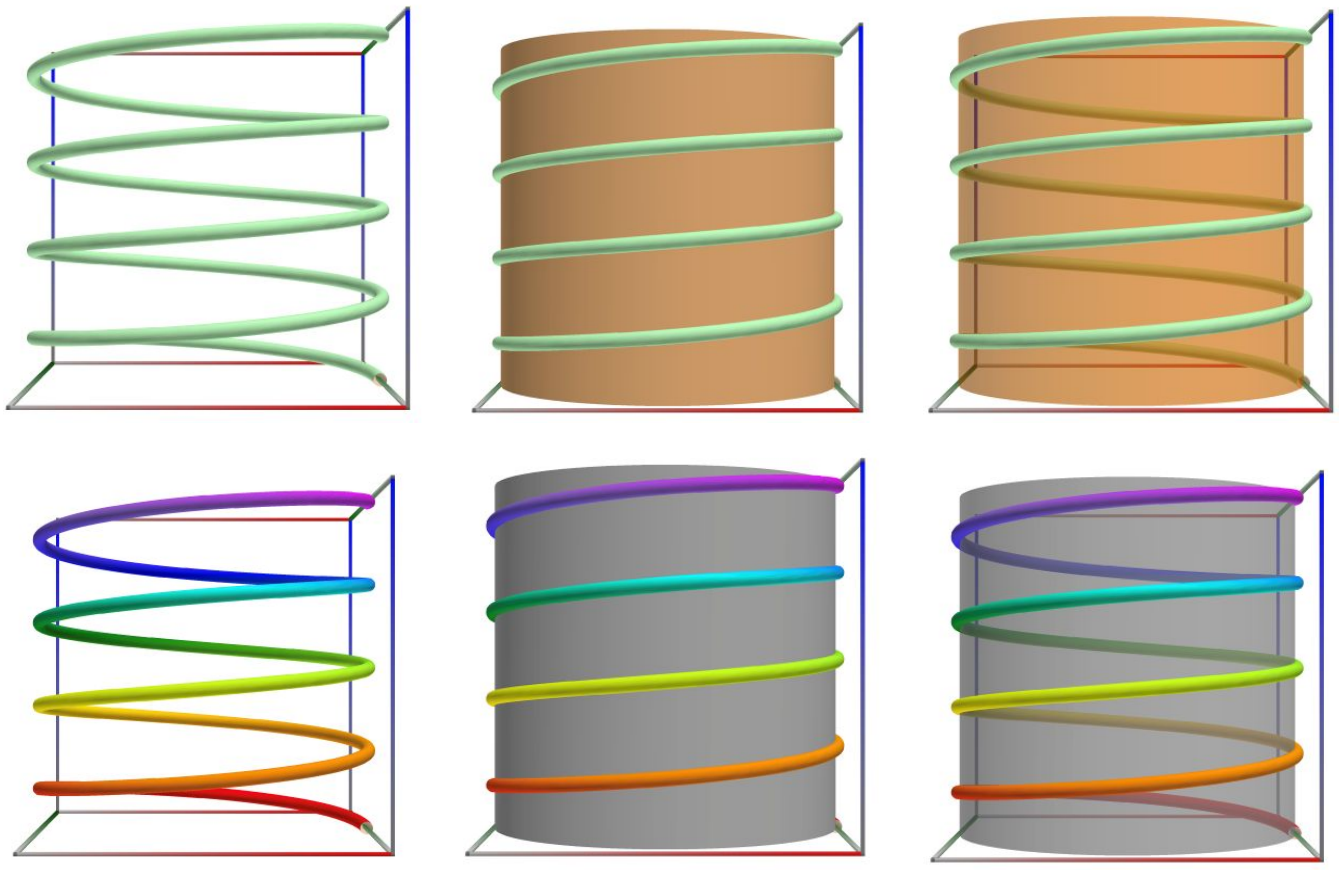

24.4.2 Conical helix based on Archimedes spiral (spiral of Pappus)

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D02a_Path_SpiralAConical.3D.xml (D02a-f).

See also: https://en.wikipedia.org/wiki/Conical_spiral

See also: https://mathworld.wolfram.com/ConicalSpiral.html

See also: https://mathcurve.com/courbes3d.gb/helicecirculaire/helicecirculaire.shtml

The conical helix can be defined as a helix traced on a cone of revolution (i.e. a curve forming a constant angle with respect to the axis of the cone), or a rhumb line of this cone (i.e. a curve forming a constant angle with the meridians); it is not a geodesic of the cone. In concrete terms, we get a conical helix when we trace a path with constant slope on a cone placed vertically.

The projection on xOy is a logarithmic spiral (), which is also the locus of the intersection between the tangents and xOy; the curve obtained by developing the cone is also a logarithmic spiral. As for all helices, it is a geodesic of the vertical cylinder based on the aforementioned spiral, projection of the curve on xOy. The principal normal is always perpendicular to Oy. The radii of curvature and torsion are proportional to z. The helix is right-handed when (it "goes up" clockwise) and left-handed when (it "goes up" counterclockwise).

The example below uses the following code in C#

```
double a = 1.0;
double phi = t * Math.PI;
double rphi = a * phi;
var x = (rphi * Math.Cos(phi));
var y = (rphi * Math.Sin(phi));
//var z = (0.2 * t);
var z = (1.2 * t);
```

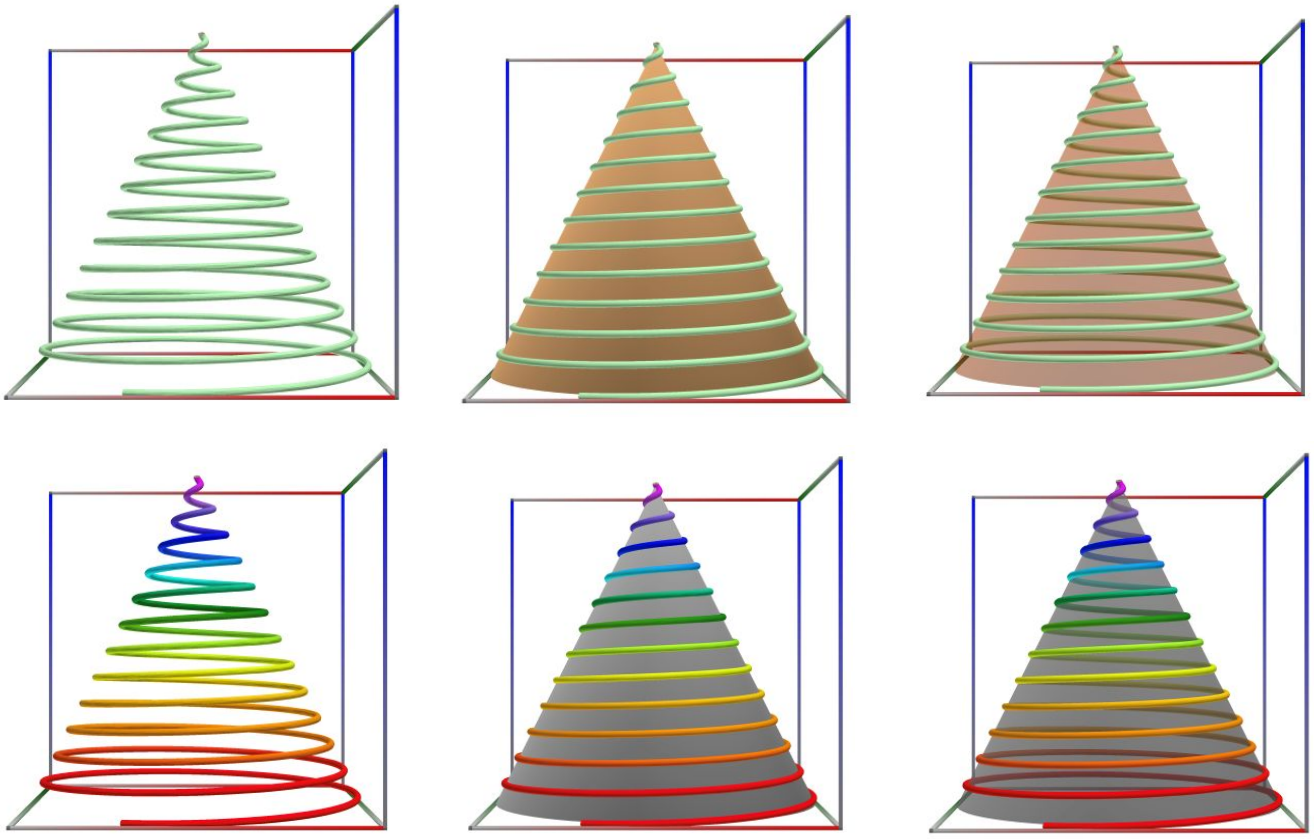

24.4.3 Conical helix based on Fermat's spiral

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D03a_Path_SpiralFConical.3D.xml (D03a-f).

See also: https://en.wikipedia.org/wiki/Conical_spiral

Conical helix based on Fermat's spiral

The example below uses the following code in C#

```
double a = 1.0;
double m = 0.2 / Math.PI;
double phi = t * Math.PI;
double rphi = a * Math.Sqrt(phi);
var x = (rphi * Math.Cos(phi));
var y = (rphi * Math.Sin(phi));
var z = (m * rphi);
```

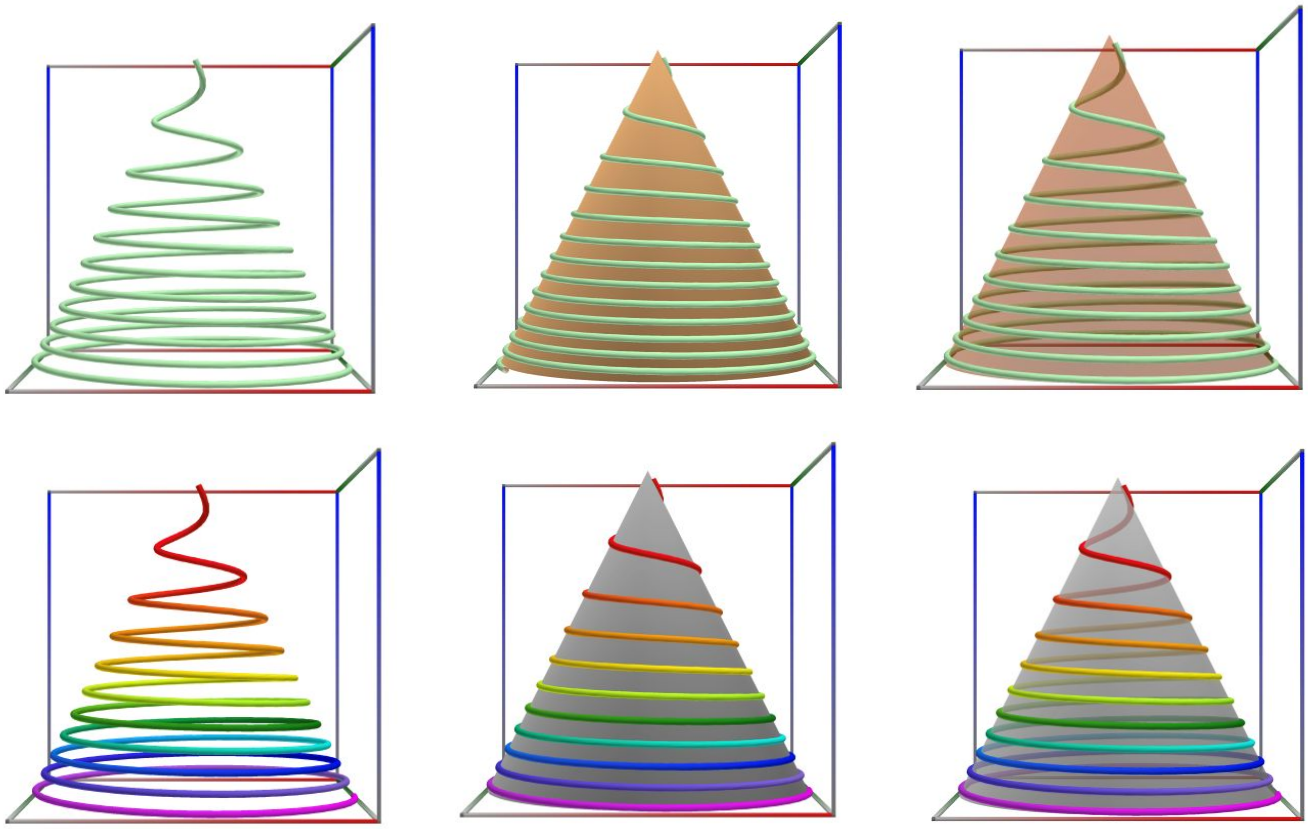

24.4.4 Conical helix based on the logarithmic spiral (Concho-Spiral)

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D04a_Path_SpiralLConical.3D.xml (D04a-f).

See also: https://mathworld.wolfram.com/Concho-Spiral.html

See also: https://en.wikipedia.org/wiki/Conchospiral

The example below uses the following code in C#

```
double k = 0.1;
double a = 1.0;
double m = 0.2 / Math.PI;
double phi = t * Math.PI;
double rphi = a * Math.Exp(k * phi);
var x = (rphi * Math.Cos(phi));
var y = (rphi * Math.Sin(phi));
var z = (m * rphi);
```

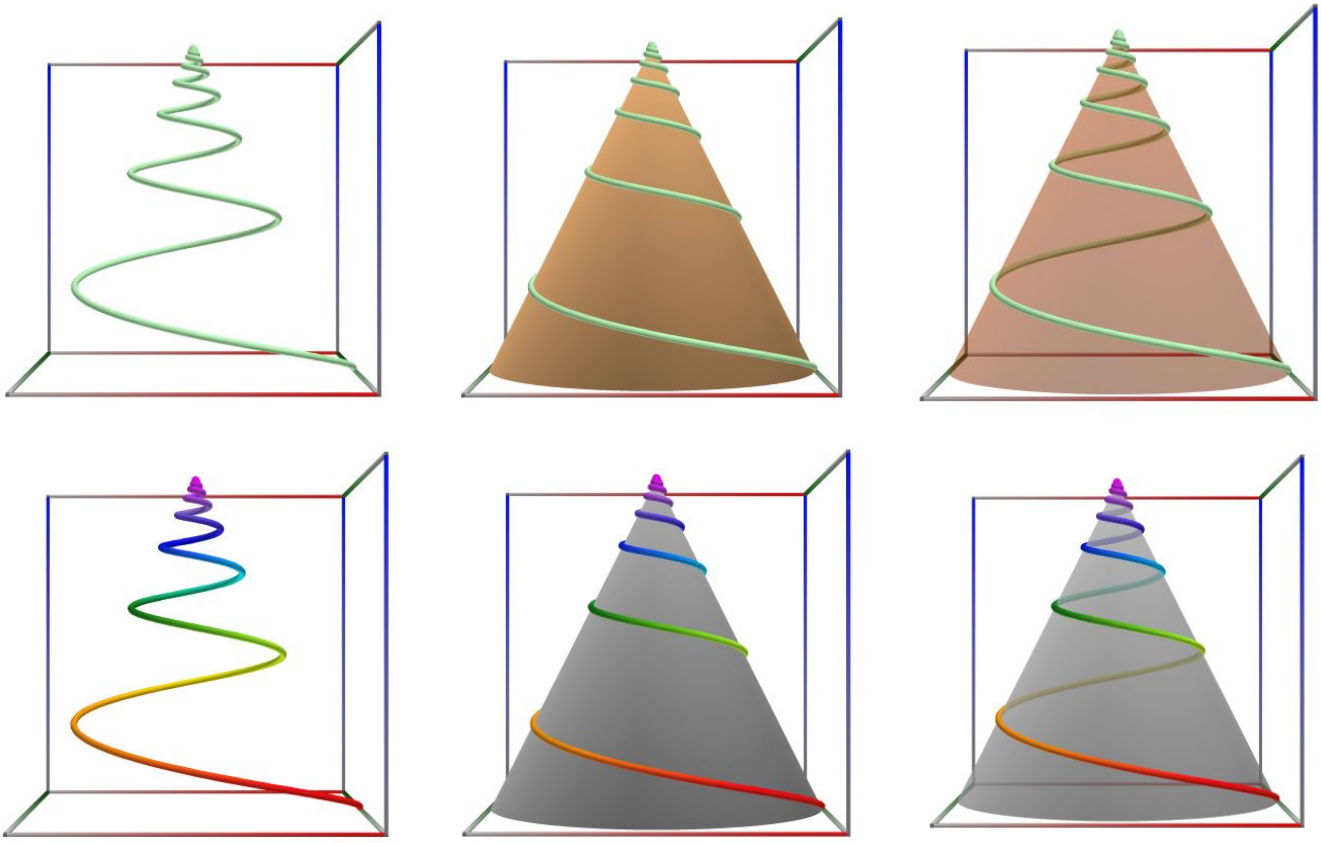

24.4.5 Rhumb line of the sphere

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D05a_Path_SphericalRhumbline.3D.xml (D05a-f).

See also: https://mathcurve.com/courbes3d.gb/loxodromie/sphereloxodromie.shtml

The rhumb lines of the sphere, associated to a given axis, are the curves that form a constant angle with the parallel (or the meridians). Do not mistake the rhumb lines for the spherical helices, that form a constant angle with the equatorial plane, nor for the clelias.

The rhumb lines correspond to the straight lines in Mercator coordinates ; in other words, on the maps of the Earth that use the Mercator projection, the rhumb lines are represented by straight lines. The angle a that the images of the rhumb lines form on the map with respect to the horizontal is the same as the angle they form on the sphere with respect to the parallels. If we know the geographic coordinates and of two points, the angle a associated to the shortest rhumb line joining these two points is obtained by the formula: and the length is given by: . The notion of rhumb line is opposed to that of geodesic, shortest path joining two points on the sphere, which is an arc of a great circle.

The example below uses the following code in C#

```
double R = 1.0;
double alpha = 0.05;
double k = Math.Tan(alpha);
var x = R * Math.Cos(t) / Math.Cosh(k * t);
var y = R * Math.Sin(t) / Math.Cosh(k * t);
var z = R * Math.Tanh(k * t);
```

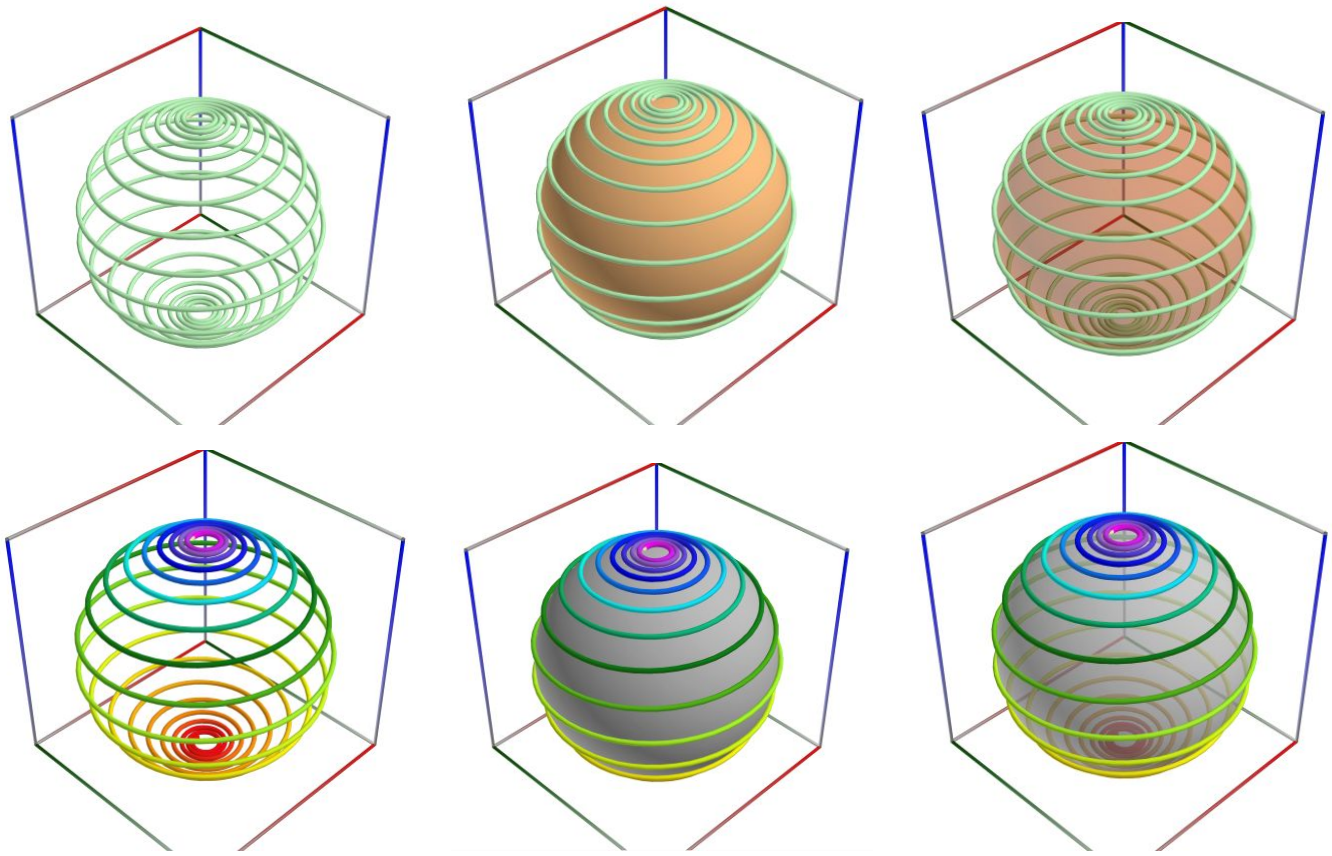

24.4.6 Clelia

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D06a_Path_SphericalClelia.3D.xml (D06a-f).

See also: https://mathcurve.com/courbes3d.gb/clelie/clelie.shtml

See also: https://en.wikipedia.org/wiki/Cl%C3%A9lie

The clelias are the loci of a point M on a meridian of a sphere rotating at constant speed w around the polar axis, the point M also moving at constant speed nw along this meridian. Therefore, physically, we obtain a clelia when peeling an orange or when rewinding regularly a spherical wool ball.

When n is rational with numerator p and denominator q:

In this case, the curve is composed of 2p patterns, obtained from the base pattern by rotations of axis Oz and angles $2k\pi/n$ and $p + 2k\pi/n$.

When p and q are odd, the curve is composed of p patterns, obtained from the base pattern by rotations of axis Oz and angles $2k\pi/n$.

The example below uses the following code in C#

```
double R = 1.0;
double n1 = 5.0 / 2.0;    // Example 1
var x = R * Math.Cos(n1 * t) * Math.Cos(t);
var y = R * Math.Cos(n1 * t) * Math.Sin(t);
var z = R * Math.Sin(n1 * t);
```

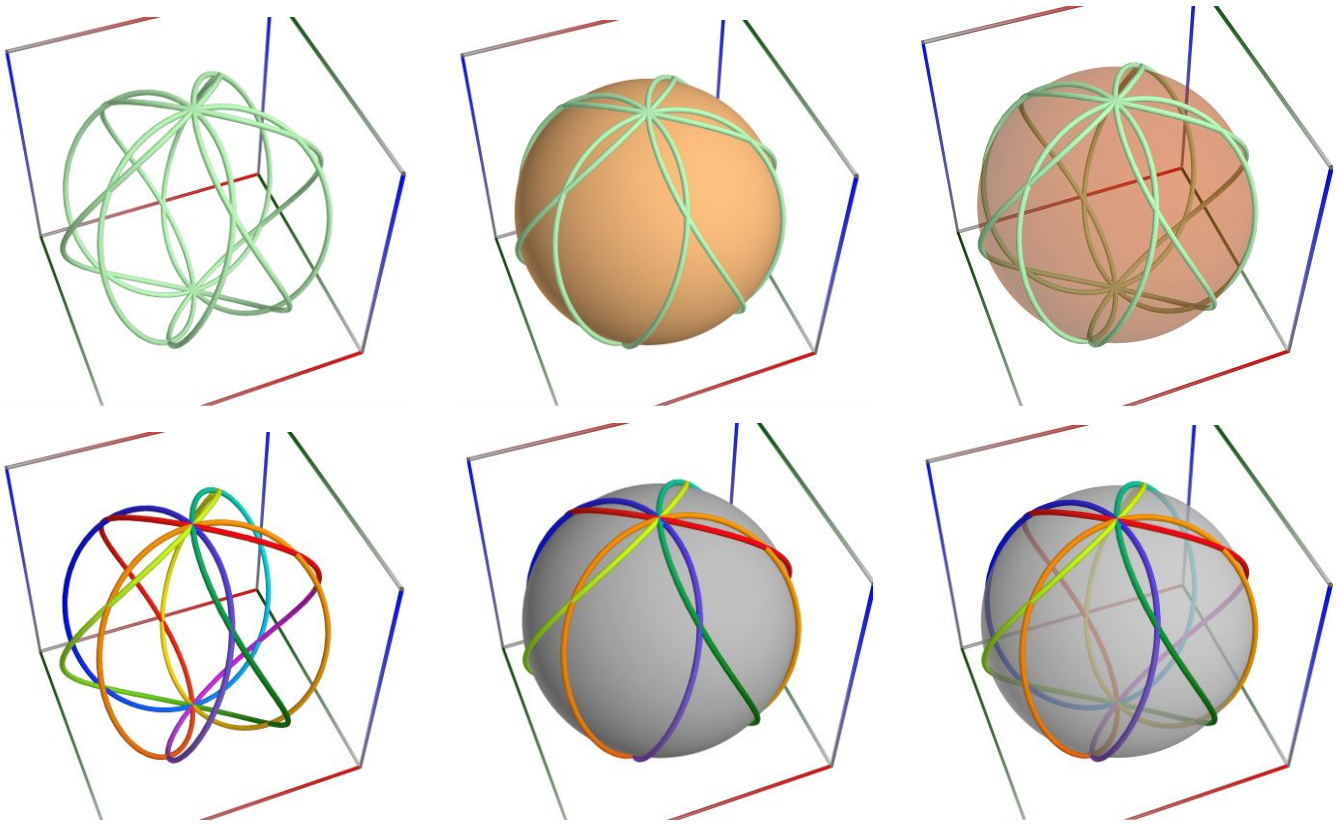

24.4.7 Spherical helix

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D07a_Path_SphericalHelix.3D.xml (D07a-f).

See also: https://mathworld.wolfram.com/SphericalSpiral.html

See also: https://mathworld.wolfram.com/SphericalHelix.html

See also: https://mathcurve.com/courbes3d.gb/helicespheric/helicespheric.shtml

A spherical cycloid is the locus of a point on a circle rolling without slipping on a fixed circle, the angle between the two circles remaining constant equal to ; here, a is the radius of the fixed circle, that of the moving circle, and xOy the plane where lies the fixed circle.

When = 0, we get the hypocycloid, and when = , the epicycloid; apart from these two cases, the cycloid is traced on the sphere corresponding to both the base and the rolling circles, hence its name of spherical cycloid. The center W of this sphere is the point on Oz at height and its radius is . Therefore, the spherical cycloid is a roulette of the motion of a sphere over a sphere.

The example below uses the following code in C#

```
double q = 5.0 / 2.0;    // Example 1
//double q = 2.0 / 5.0;    // Example 2
//double q = 1.0 / 5.0;    // Example 3
double R = 1.0;
double k = q / (q + 2);
var x = R * (k * Math.Cos(t) * Math.Cos(k * t) + Math.Sin(t) * Math.Sin(k * t));
var y = R * (k * Math.Sin(t) * Math.Cos(k * t) - Math.Cos(t) * Math.Sin(k * t));
var z = R * Math.Sqrt(1 - k * k) * Math.Cos(k * t);
```

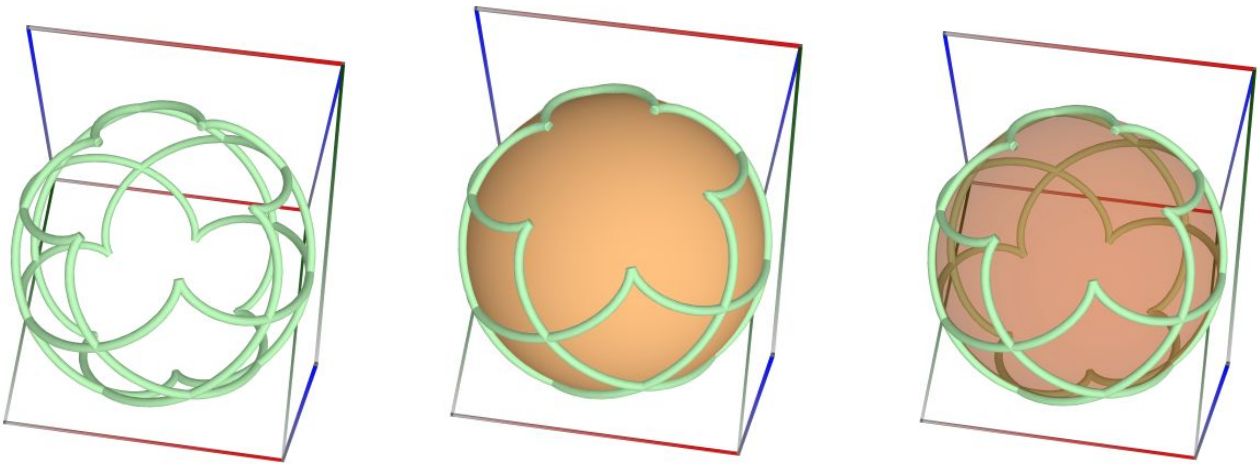

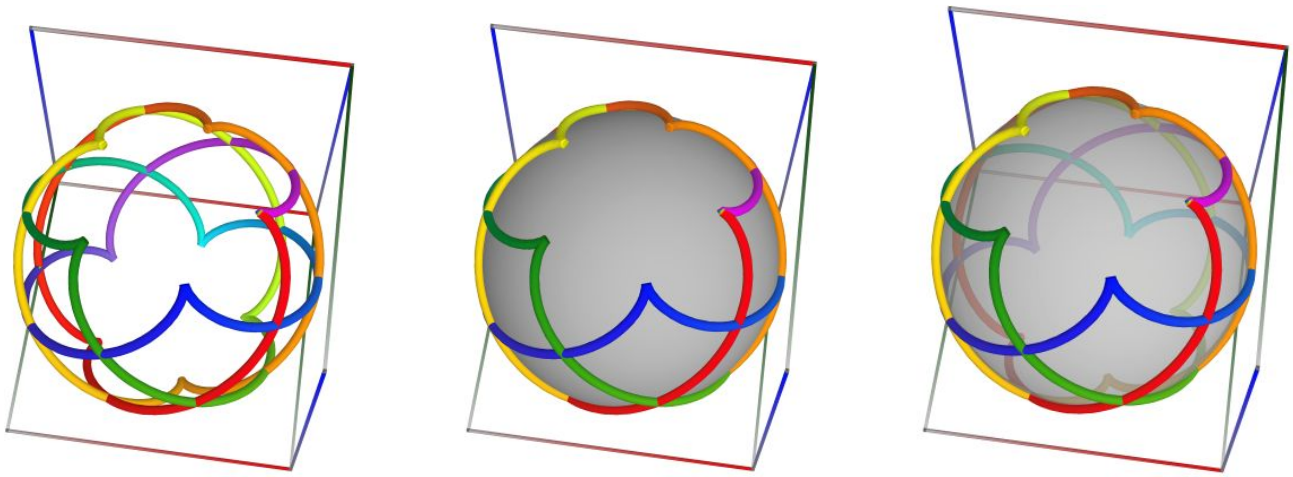

24.4.8 Satellite curve

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D08a_Path_SphericalSatellite.3D.xml (D08a-f).

See also: https://mathcurve.com/courbes3d.gb/satellite/satellite.shtml

See also: https://mathcurve.com/courbes3d.gb/capareda/capareda.shtml

The satellite curves are the various trajectories of a point M on a given great circle of a sphere rotating around one of its axes, while M has a uniform motion along the circle. These curves can also be seen as the trajectories of points on a circle in uniform rotation around an axis, this axis being itself in uniform rotation around an axis passing by the center of the circle.

The name of satellite curve comes from the fact that the trajectory, in the frame associated to the Earth, of a satellite in uniform circular rotation around the center of the Earth is such a curve: see for example this book (pages 177 to 181).

In the above parametrization, the sphere centered on O turns around Oz and the plane of the circle forms an angle with respect to xOy; k is the ratio of the speed of rotation of M on the circle over the speed of rotation of the sphere around its axis.

Special cases of satellite curves include:

- the clelias when the great circle meets the axis of rotation of the sphere ().
- the spherical helices when (in the second definition above, the circle rolls without slipping on a fixed circle); it is the case where the curve has cuspidal points.

The example below uses the following code in C#

```
double R = 1.0;
//double alpha = 1 * Math.PI / 2;  // This corresponds to clelias
double alpha = 3 * Math.PI / 4;
double k = 3.0 / 4.0;
//double k = -Math.Cos(alpha);  // This corresponds to spherical helices
var x = R * (Math.Cos(alpha) * Math.Cos(t) * Math.Cos(k * t) - Math.Sin(t) * Math.Sin(k * t));
var y = R * (Math.Cos(alpha) * Math.Sin(t) * Math.Cos(k * t) + Math.Cos(t) * Math.Sin(k * t));
var z = R * Math.Sin(alpha) * Math.Cos(k * t);
```

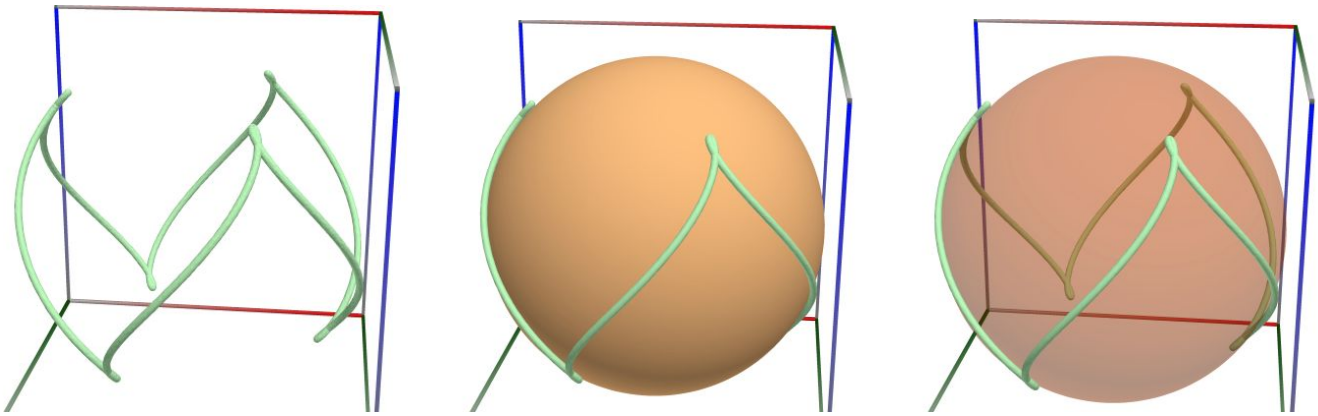

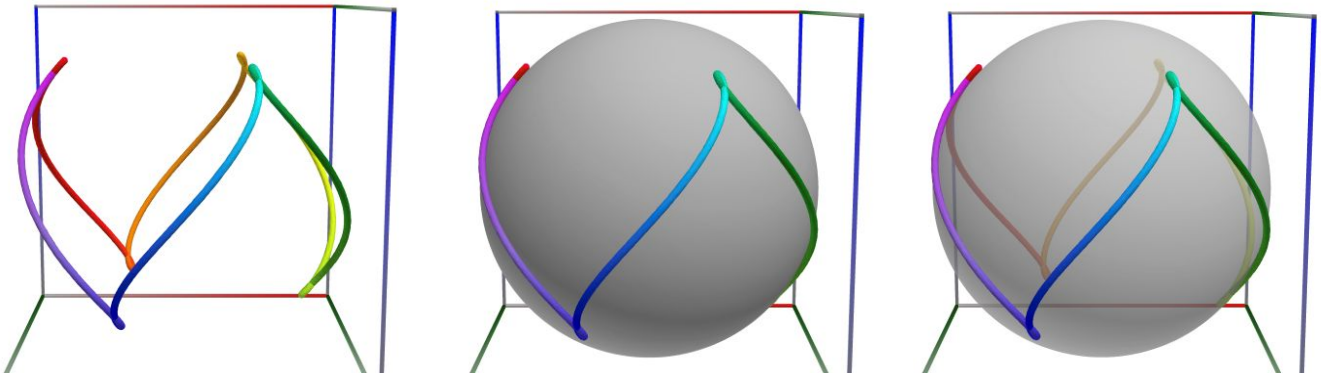

24.5 (Coil) springs

See also: https://en.wikipedia.org/wiki/Coil_spring

See also: https://en.wikipedia.org/wiki/Spring_(device)

24.5.1 Spring 1

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D01a_Path_Spring1.3D.xml (D01a-c).

The example below uses the following code in C#

```
var x = ((-3.75 * t + 100) * Math.Sin(t * Math.PI)) / 100;
var z = (20 * t) / 100;
var y = ((-3.75 * t + 100) * Math.Cos(t * Math.PI)) / 100;
```

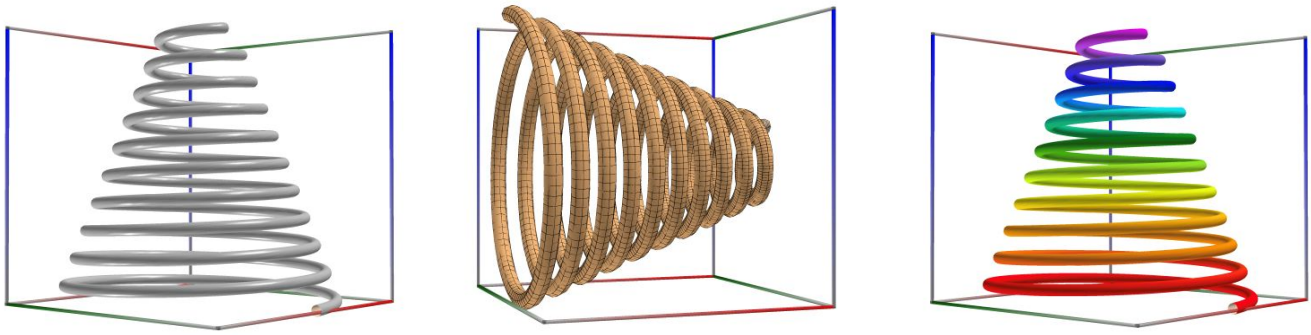

24.5.2 Spring 2

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D02a_Path_Spring2.3D.xml (D02a-b).

The example below uses the following code in C#

```
var x = (Math.Sqrt(10000 - 100 * t * t) * Math.Sin(t * Math.PI)) / 100;
var z = (20 * t) / 100;
var y = (Math.Sqrt(10000 - 100 * t * t) * Math.Cos(t * Math.PI)) / 100;
```

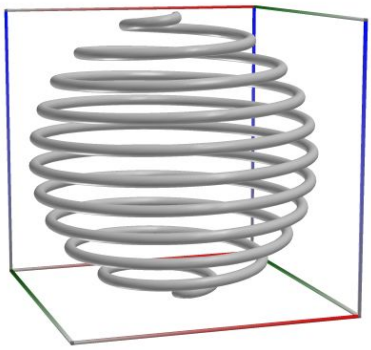

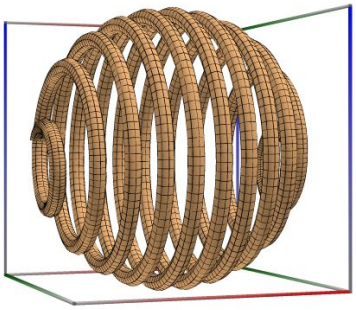

24.5.3 Spring 3

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D04a_Path_Spring4.3D.xml (D04a-b).

The example below uses the following code in C#

```
var x = (Math.Sqrt(10000 - 100 * t * t) * Math.Sin(t * Math.PI)) / 100;
var z = 209.22 * (Math.Tanh(0.1896 * t)) / 100;
var y = (Math.Sqrt(10000 - 100 * t * t) * Math.Cos(t * Math.PI)) / 100;
```

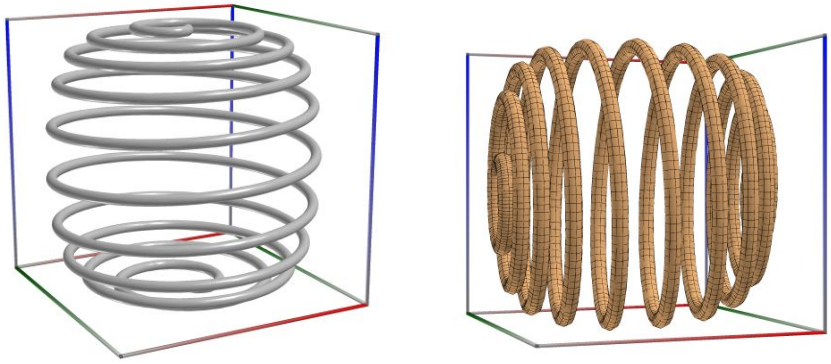

24.5.4 Spring 4

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D04a_Path_Spring4.3D.xml (D04a-b).

The example below uses the following code in C#

```
var x = (200 * Math.Cos(0.05 * t * Math.PI) * Math.Sin(t * Math.PI)) / 100;
var z = 209.22 * (Math.Tanh(0.1896 * t)) / 100;
var y = (200 * Math.Cos(0.05 * t * Math.PI) * Math.Cos(t * Math.PI)) / 100;
```

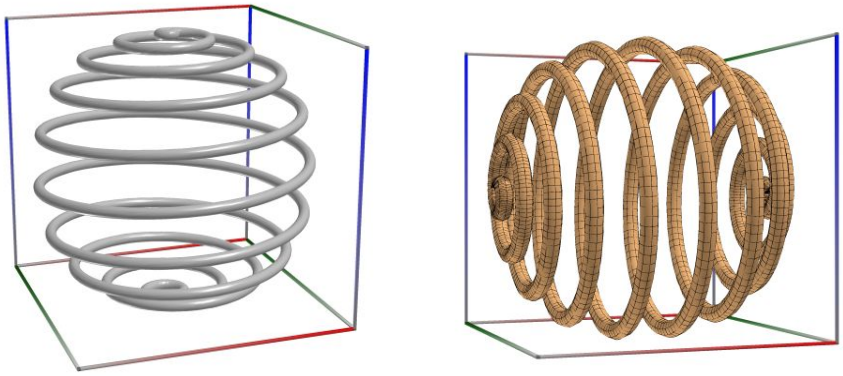

24.5.5 Spring 5

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D05a_Path_Spring5.3D.xml (D05a-b).

The example below uses the following code in C#

```
double e = Math.Exp(-(0.2 * t) * (0.2 * t));
var x = (200 * e * Math.Sin(t * Math.PI)) / 100;
var z = 209.22 * (Math.Tanh(0.1896 * t)) / 100;
var y = (200 * e * Math.Cos(t * Math.PI)) / 100;
```

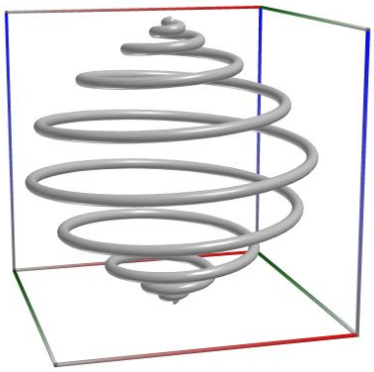

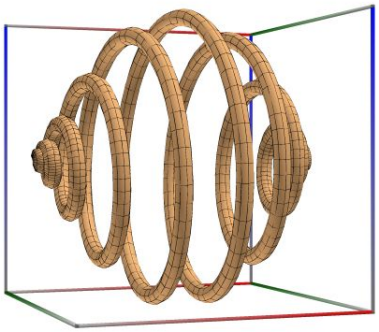

24.5.6 Spring 6

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D06a_Path_Spring6.3D.xml (D06a-b).

The example below uses the following code in C#

```
double e = Math.Exp(-(0.2 * t) * (0.2 * t));
var x = ((200 - 140 * e) * Math.Sin(t * Math.PI)) / 100;
var z = 207.46 * (Math.Tanh(0.2 * t)) / 100;
var y = ((200 - 140 * e) * Math.Cos(t * Math.PI)) / 100;
```

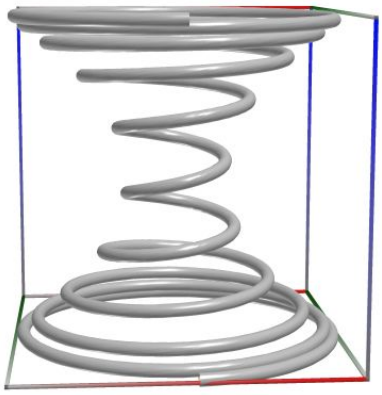

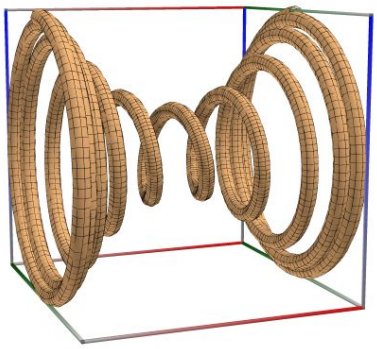

24.5.7 Spring 7

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D07a_Path_Spring7.3D.xml (D07a-b).

The example below uses the following code in C#

```
var x = (200 * Math.Cos(t) * Math.Cos(Math.Atan(0.15 * t))) / 100;
var z = -200 * Math.Sin(Math.Atan(0.15 * t)) / 100;
var y = (200 * Math.Sin(t) * Math.Cos(Math.Atan(0.15 * t))) / 100;
```

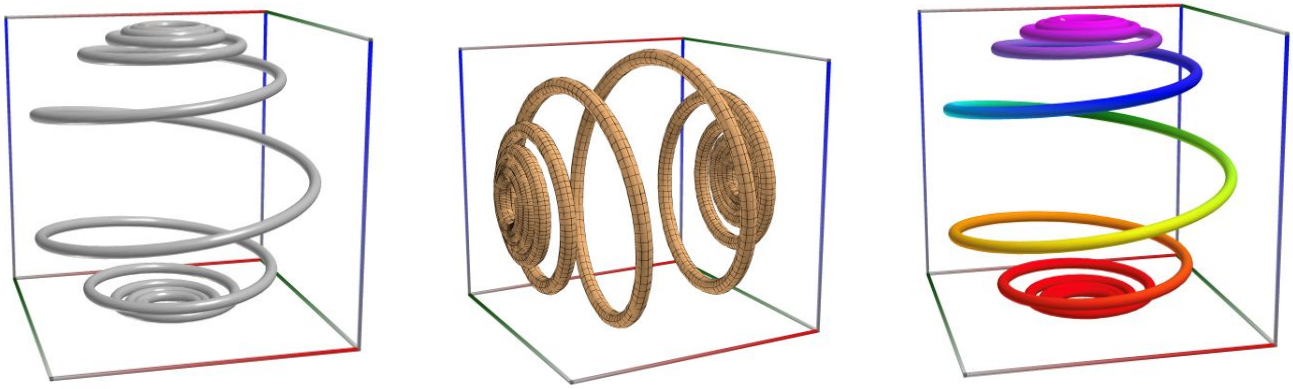

24.5.8 Spring 8

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D08a_Path_Spring8.3D.xml (D08a-b).

The example below uses the following code in C#

```
double R = 100.0;
double G = 160.0;
double D = 15.0;
double N = 10.0;
var x = (Math.Cos(t * Math.PI) * R + Math.Cos(t * Math.PI) * D * Math.Cos(N * t * Math.PI)) / 100;
var y = (D * Math.Sin(N * t * Math.PI) + 0.5 * G * t) / 100;
var z = (Math.Sin(t * Math.PI) * R + Math.Sin(t * Math.PI) * D * Math.Cos(N * t * Math.PI)) / 100;
```

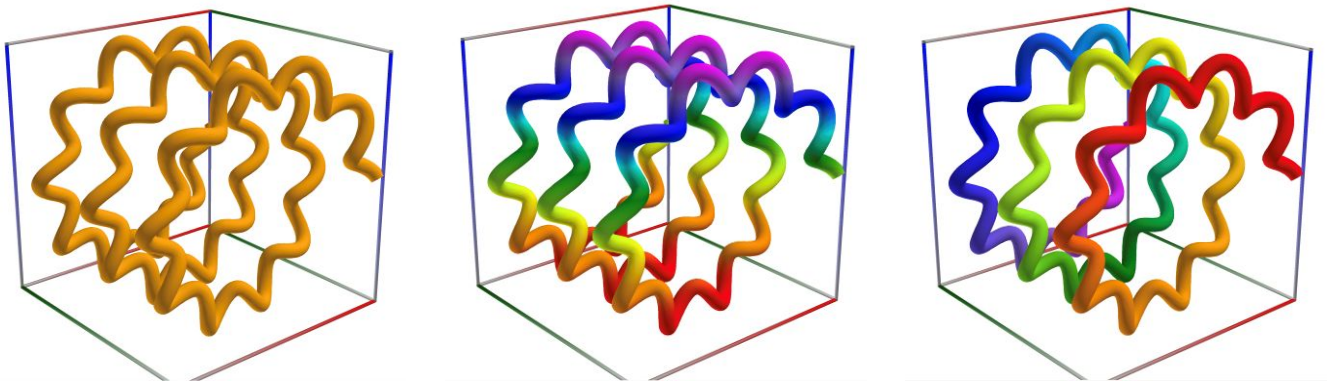

24.6 General knots

24.6.1 Trefoil A

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D01a_Path_Trefoil_Knoten_A.3D.xml (D01a-d).

See also: https://en.wikipedia.org/wiki/Trefoil_knot

See also: https://katlas.org/wiki/T(3,2)

The example below uses the following code in C#

```
var x = (2 + Math.Cos(3 * t)) * Math.Cos(2 * t);
var y = (2 + Math.Cos(3 * t)) * Math.Sin(2 * t);
var z = Math.Sin(3 * t);
```

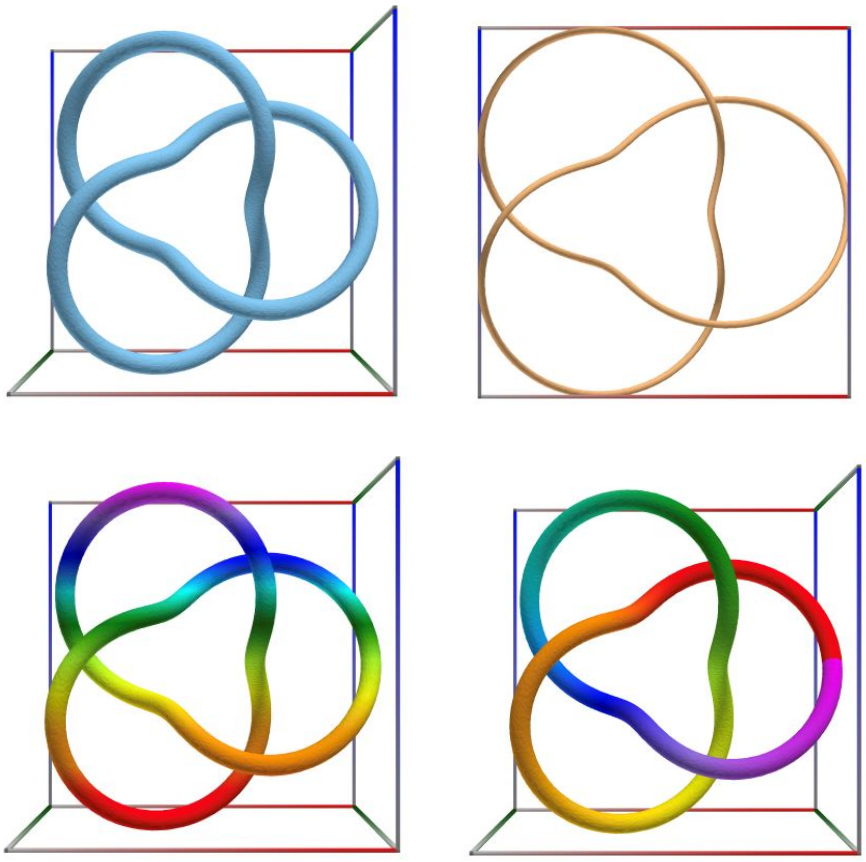

24.6.2 Trefoil B

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D02a_Path_Trefoil_Knoten_B.3D.xml (D02a-d).

See also: https://en.wikipedia.org/wiki/Trefoil_knot

See also: https://katlas.org/wiki/T(3,2)

The example below uses the following code in C#

```
var x = (-10 * Math.Cos(t) - 2 * Math.Cos(5 * t) + 15 * Math.Sin(2 * t)) / 10;
var y = (-15 * Math.Cos(2 * t) + 10 * Math.Sin(t) - 2 * Math.Sin(5 * t)) / 10;
var z = (10 * Math.Cos(3 * t)) / 10;
```

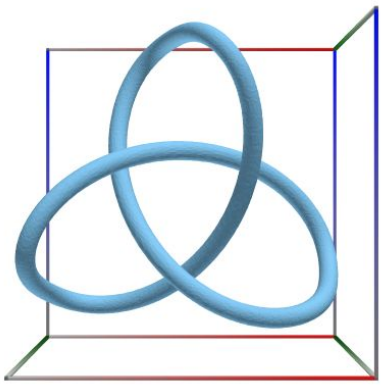
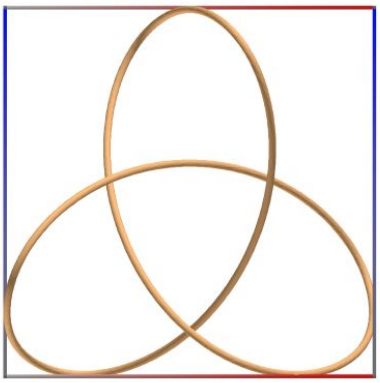
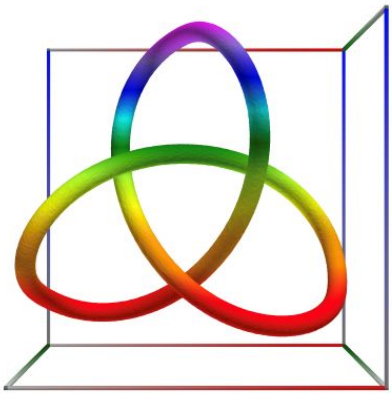
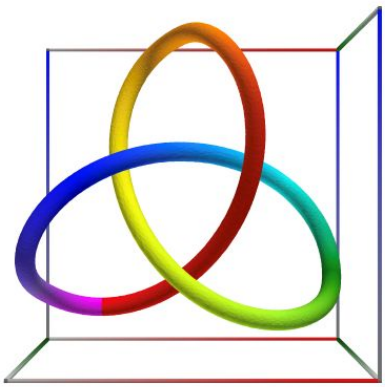

24.6.3 Square knot

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D03a_Path_SquareKnotP_P90T90.3D.xml (D03a-f).

See also: https://en.wikipedia.org/wiki/Square_knot_(mathematics)

See also: https://mathworld.wolfram.com/SquareKnot.html

See also: https://mathcurve.com/courbes3d.gb/plat.vache/plat_vache.shtml

The example below uses the following code in C#

```
var x = (-22 * Math.Cos(t) - 128 * Math.Sin(t) - 44 * Math.Cos(3 * t) - 78 * Math.Sin(3 * t)) / 10;
var y = (11 * Math.Cos(t) - 43 * Math.Cos(3 * t) + 34 * Math.Cos(5 * t) - 39 * Math.Sin(5 * t)) / 10;
var z = (70 * Math.Cos(3 * t) - 40 * Math.Sin(3 * t) + 8 * Math.Cos(5 * t) - 9 * Math.Sin(5 * t)) / 10;
```

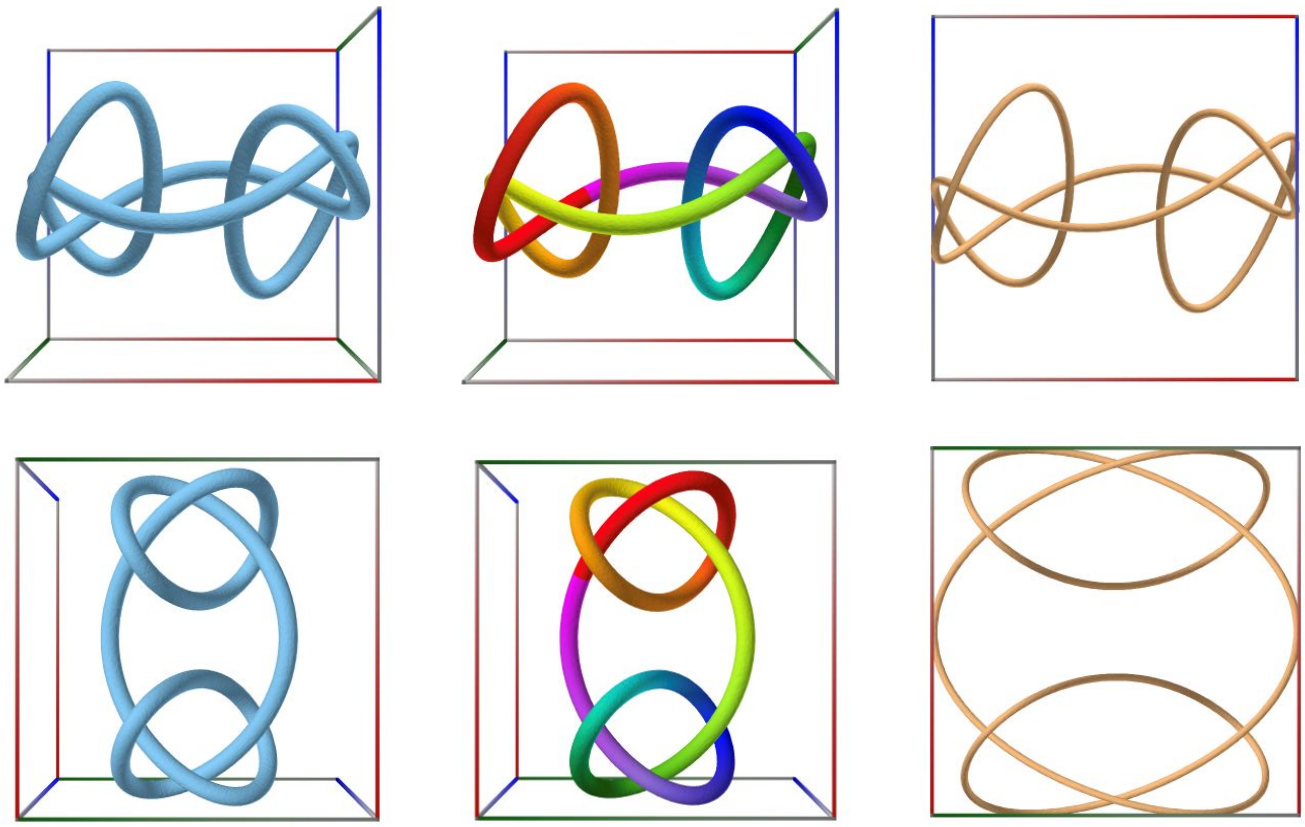

24.6.4 Granny knot

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D04a_Path_GrannyKnot.3D.xml (D04a-f).

See also: https://en.wikipedia.org/wiki/Granny_knot_(mathematics)

See also: https://mathworld.wolfram.com/GrannyKnot.html

See also: https://mathcurve.com/courbes3d.gb/plat.vache/plat_vache.shtml

The example below uses the following code in C#

```
var x = (-22 * Math.Cos(t) - 128 * Math.Sin(t) - 44 * Math.Cos(3 * t) - 78 * Math.Sin(3 * t)) / 10;
var y = (-10 * Math.Cos(2 * t) - 27 * Math.Sin(2 * t) + 38 * Math.Cos(4 * t) + 46 * Math.Sin(4 * t)) / 10;
var z = (70 * Math.Cos(3 * t) - 40 * Math.Sin(3 * t)) / 10;
```

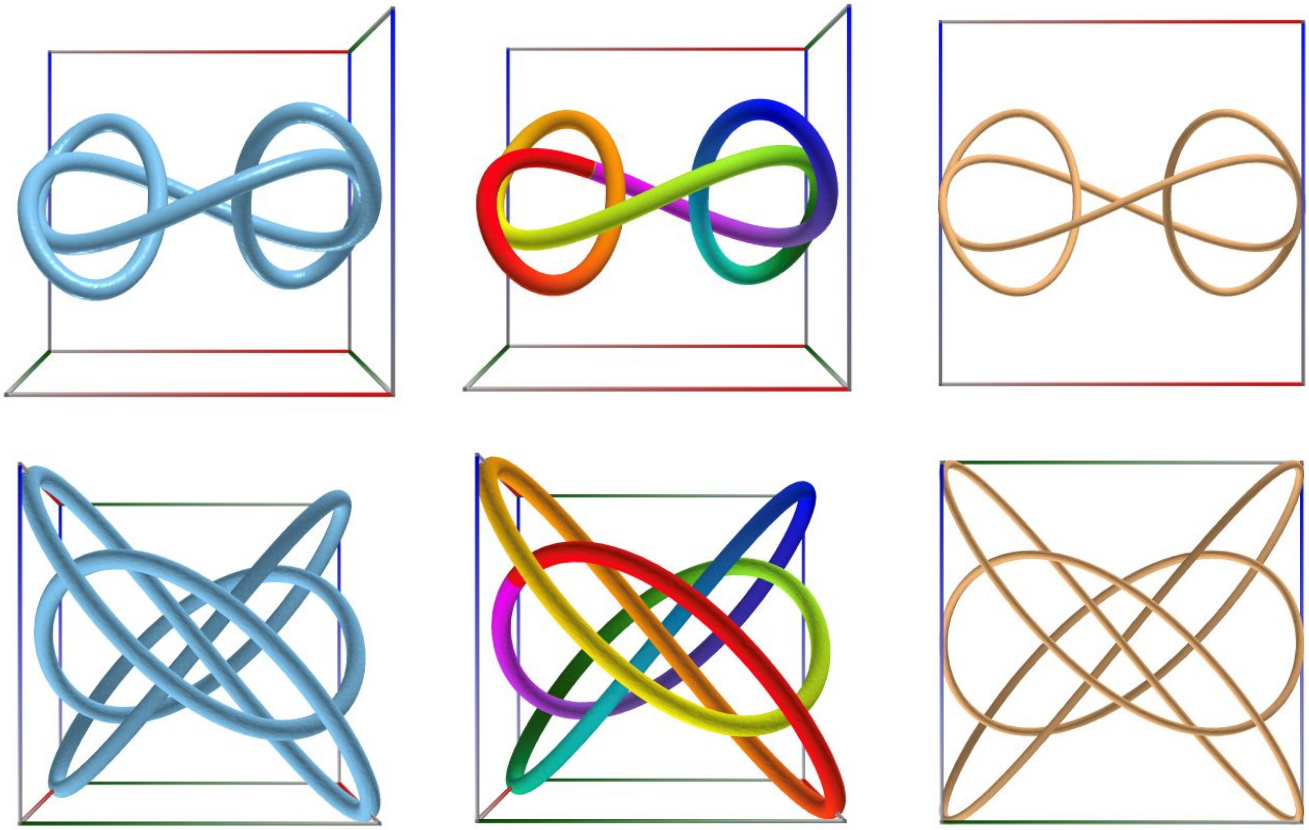

24.6.5 Cinquefoil Knot

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D05a_Path_CinquefoilKnot.3D.xml (D05a-d).

See also: https://en.wikipedia.org/wiki/Cinquefoil_knot

See also: https://katlas.org/wiki/T(5,2)

Cinquefoil Knot: https://home.adelphi.edu/~stemkoski/knotgallery/

The example below uses the following code in C#

```
var x = Math.Cos(2 * t) * (3 + Math.Cos(5 * t)) / 10;
var y = Math.Sin(2 * t) * (3 + Math.Cos(5 * t)) / 10;
var z = Math.Sin(5 * t) / 10;
```

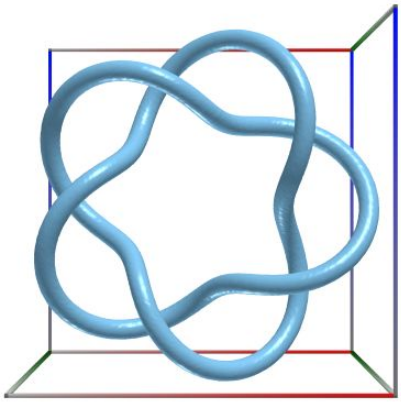
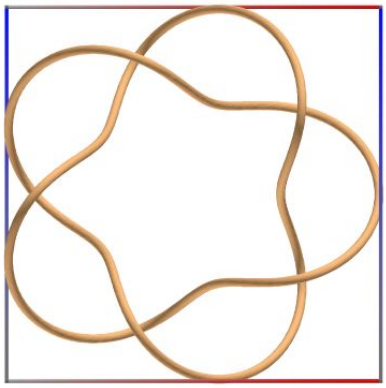
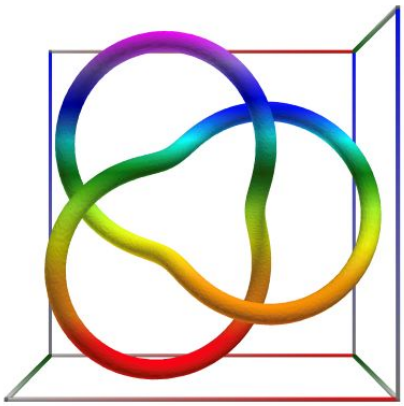
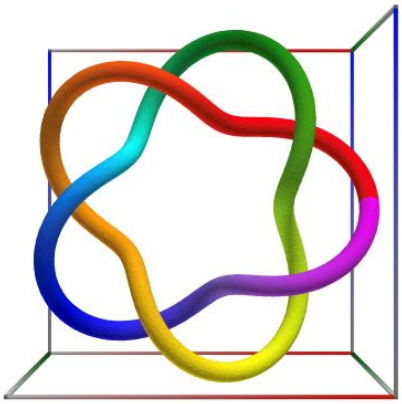

24.6.6 74 Knot

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D06a_Path_74Knot.3D.xml (D06a-f).

See also: https://en.wikipedia.org/wiki/74_knot

This is a Lissajous knot.

See also: https://katlas.org/wiki/7_4

The example below uses the following code in C#

```
var x = Math.Cos(2 * t + 0.22) / 10;
var y = Math.Cos(3 * t + 1.10) / 10;
var z = Math.Cos(7 * t) / 10;
```

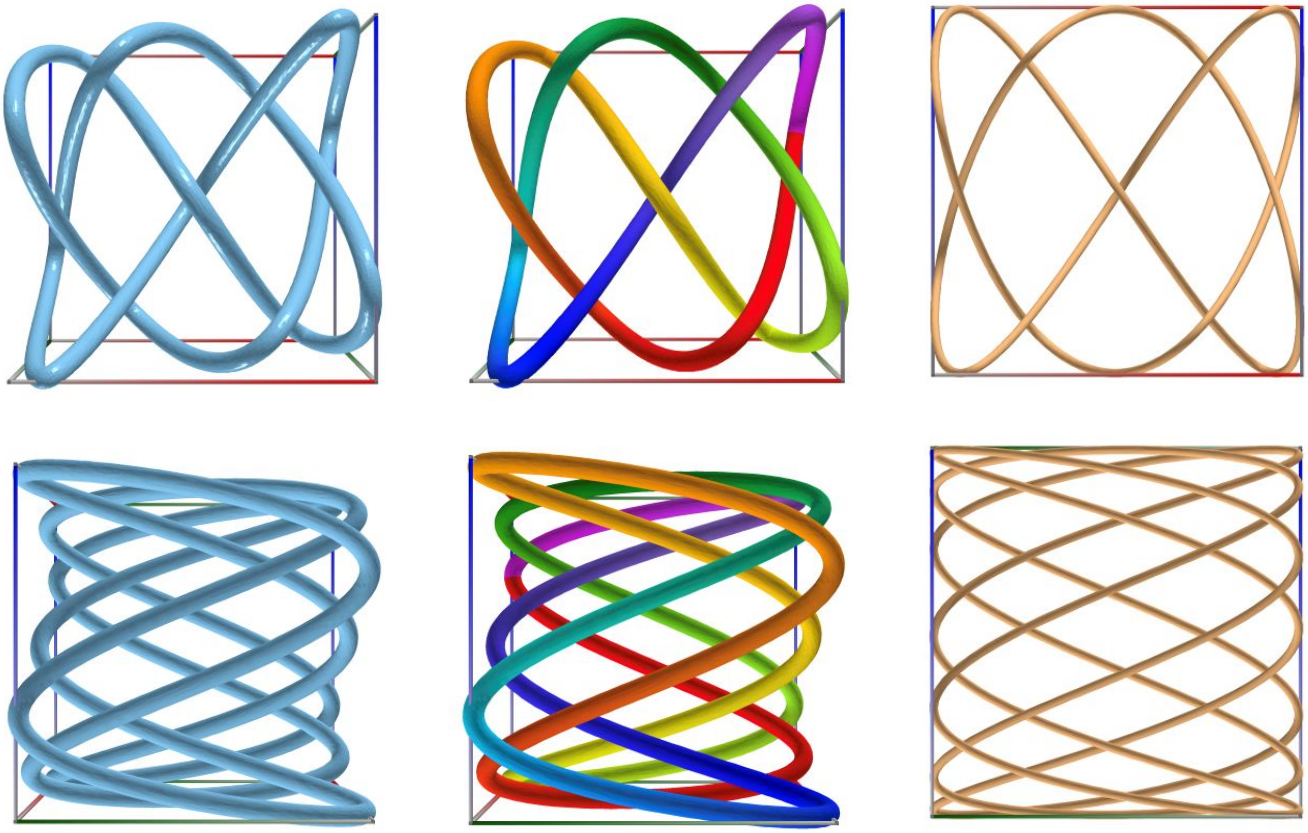

24.6.7 Figure-eight knot

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D07a_Path_FigureEightKnot.3D.xml (D07a-f).

See also: https://mathcurve.com/courbes3d.gb/noeuds/noeudenhuit.shtml

See also: https://en.wikipedia.org/wiki/Figure-eight_knot_(mathematics)

See also: https://katlas.org/wiki/4_1

The example below uses the following code in C#

```
var x = ((2 + Math.Cos(2 * t)) * Math.Cos(3 * t)) / 10;
var y = ((2 + Math.Cos(2 * t)) * Math.Sin(3 * t)) / 10;
var z = (Math.Sin(4 * t)) / 10;
```

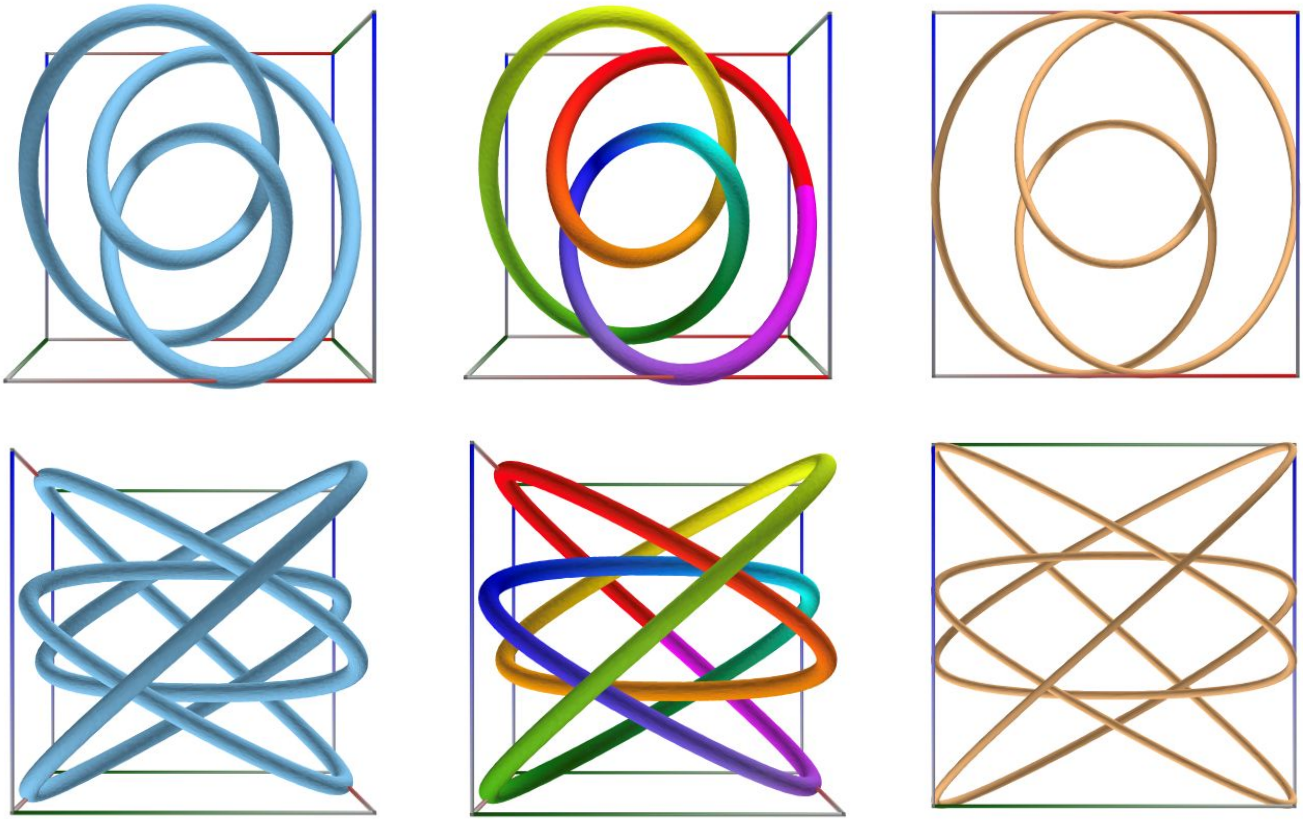

24.7 Torus knots

See also: https://katlas.org/wiki/36_Torus_Knots

24.7.1 Torus knot 3:2

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D01a_TorusKnotp3q2.3D.xml (D01a-f).

Some text

See also: https://mathworld.wolfram.com/TrefoilKnot.html

See also: https://katlas.org/wiki/T(3,2)

The example below uses the following code in C#

```
double R = 100;
double r = 25;
double p = 3;
double q = 2;
var x = ((R + r * Math.Cos(p * t)) * Math.Cos(q * t)) / 50;
var y = ((R + r * Math.Cos(p * t)) * Math.Sin(q * t)) / 50;
var z = (r * Math.Sin(p * t)) / 50;
```

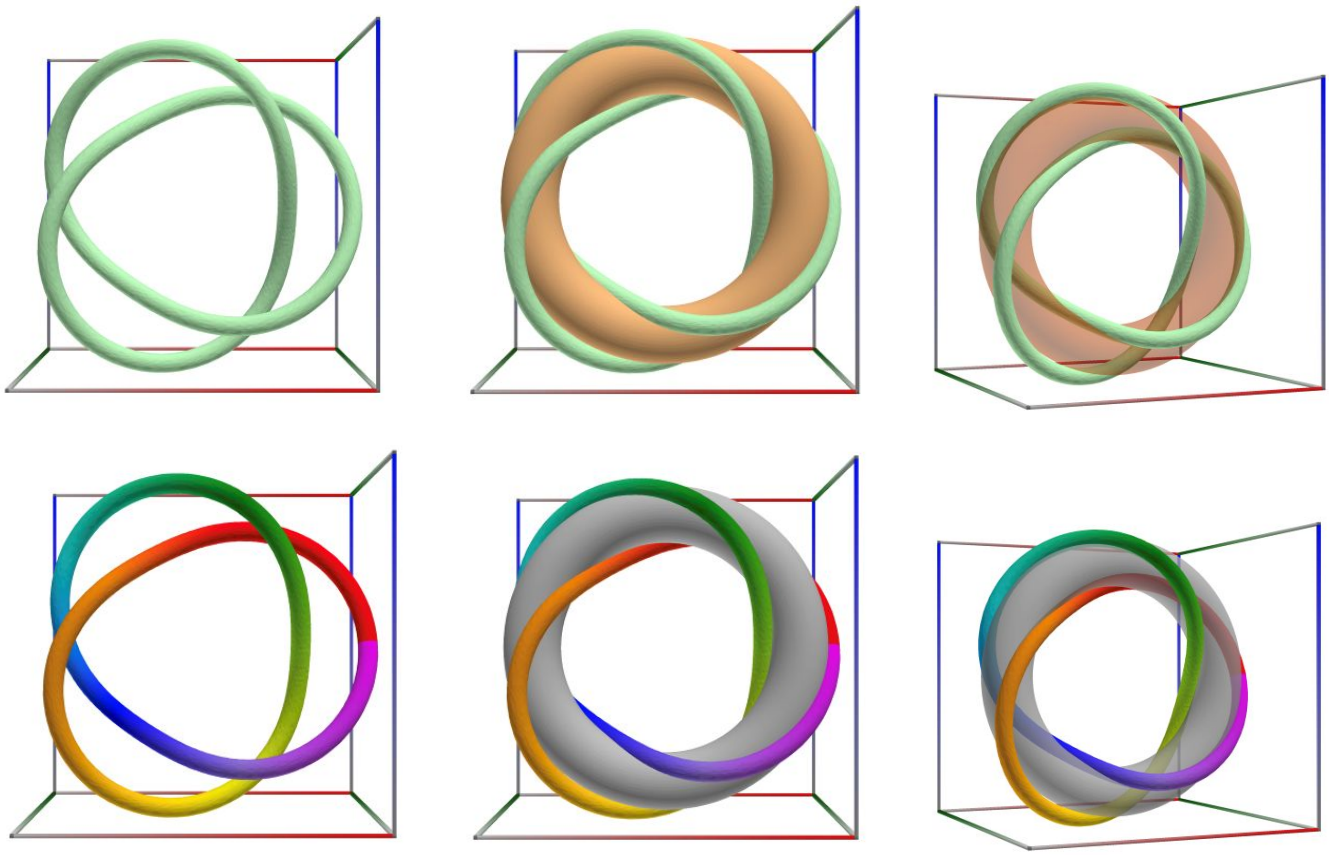

24.7.2 Torus knot 5:2

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D02a_TorusKnotp5q2.3D.xml (D02a-f).

Some text

See also: https://en.wikipedia.org/wiki/Cinquefoil_knot

See also: https://katlas.org/wiki/T(5,2)

The example below uses the following code in C#

```
double R = 100;
double r = 25;
double p = 5;
double q = 2;
var x = ((R + r * Math.Cos(p * t)) * Math.Cos(q * t)) / 50;
var y = ((R + r * Math.Cos(p * t)) * Math.Sin(q * t)) / 50;
var z = (r * Math.Sin(p * t)) / 50;
```

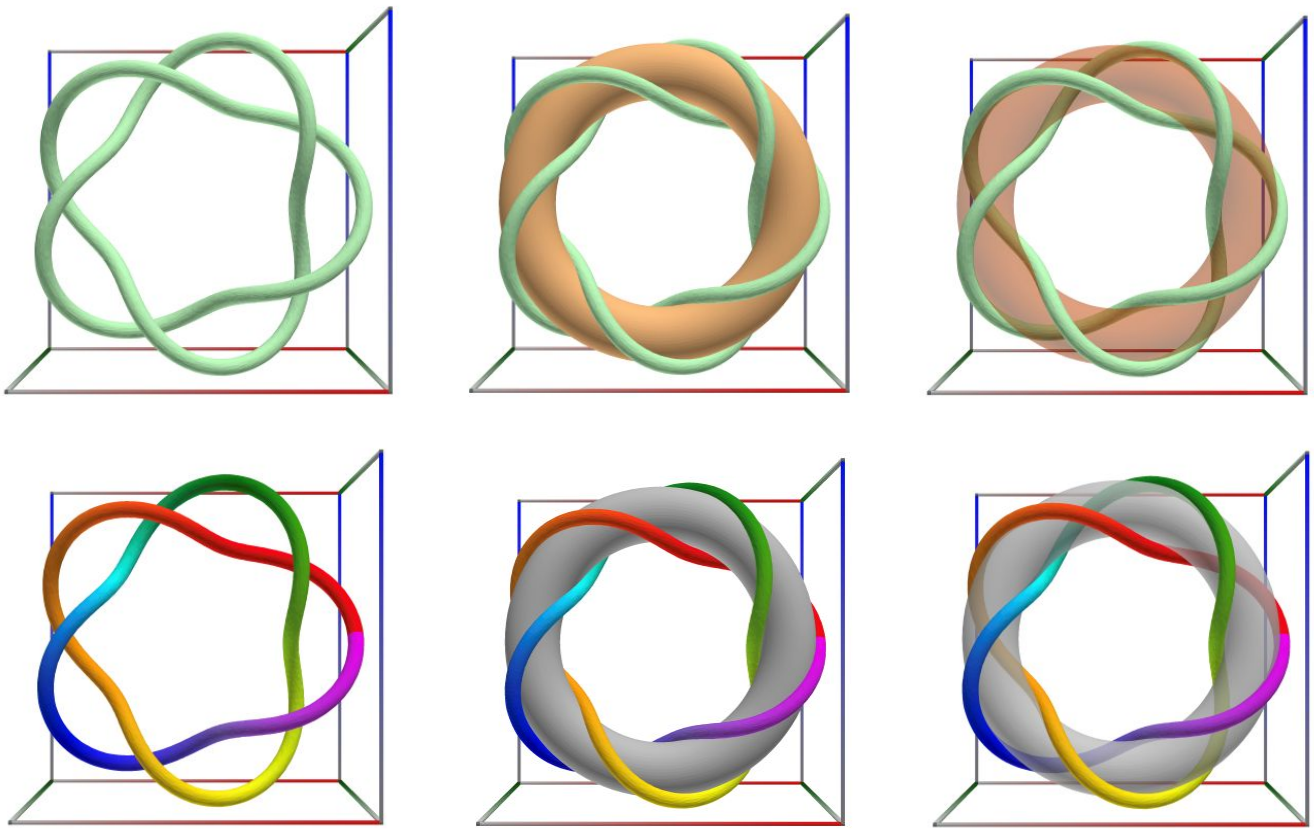

24.7.3 Torus knot 7:2

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D03a_TorusKnotp7q2.3D.xml (D03a-f).

Some text

See also: https://en.wikipedia.org/wiki/71_knot

See also: https://katlas.org/wiki/T(7,2)

See also: https://katlas.org/wiki/7_1

The example below uses the following code in C#

```
double R = 100;
double r = 25;
double p = 7;
double q = 2;
var x = ((R + r * Math.Cos(p * t)) * Math.Cos(q * t)) / 50;
var y = ((R + r * Math.Cos(p * t)) * Math.Sin(q * t)) / 50;
var z = (r * Math.Sin(p * t)) / 50;
```

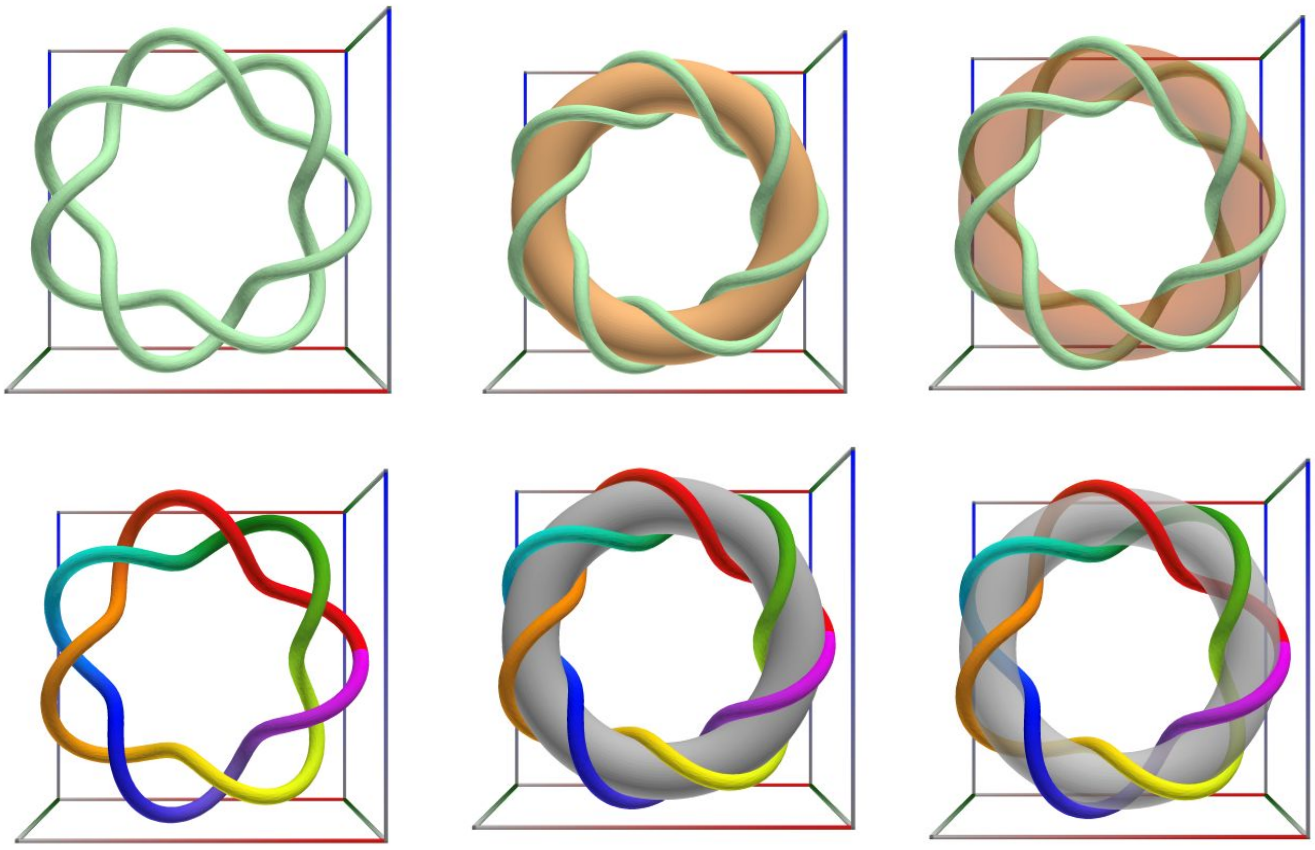

24.7.4 Torus knot 7:3

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D04a_TorusKnotp7q3.3D.xml (D04a-f).

Some text

See also: https://katlas.org/wiki/T(7,3)

The example below uses the following code in C#

```
double R = 100;
double r = 25;
double p = 7;
double q = 3;
var x = ((R + r * Math.Cos(p * t)) * Math.Cos(q * t)) / 50;
var y = ((R + r * Math.Cos(p * t)) * Math.Sin(q * t)) / 50;
var z = (r * Math.Sin(p * t)) / 50;
```

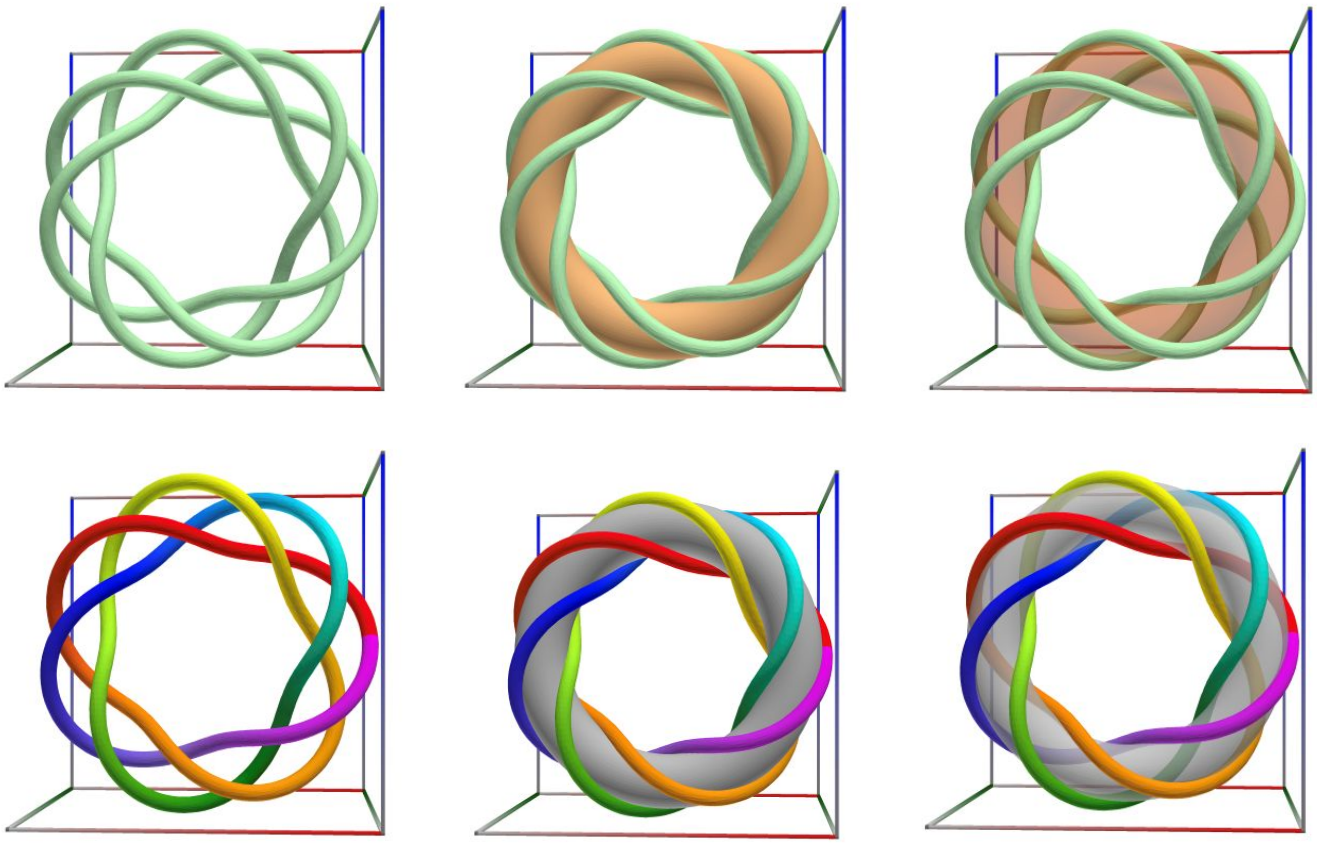

24.7.5 Torus knot 15:2

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D05a_TorusKnotp15q2.3D.xml (D05a-f).

Some text

See also: https://katlas.org/wiki/T(15,2)

The example below uses the following code in C#

```
double R = 100;
double r = 25;
double p = 15;
double q = 2;
var x = ((R + r * Math.Cos(p * t)) * Math.Cos(q * t)) / 50;
var y = ((R + r * Math.Cos(p * t)) * Math.Sin(q * t)) / 50;
var z = (r * Math.Sin(p * t)) / 50;
```

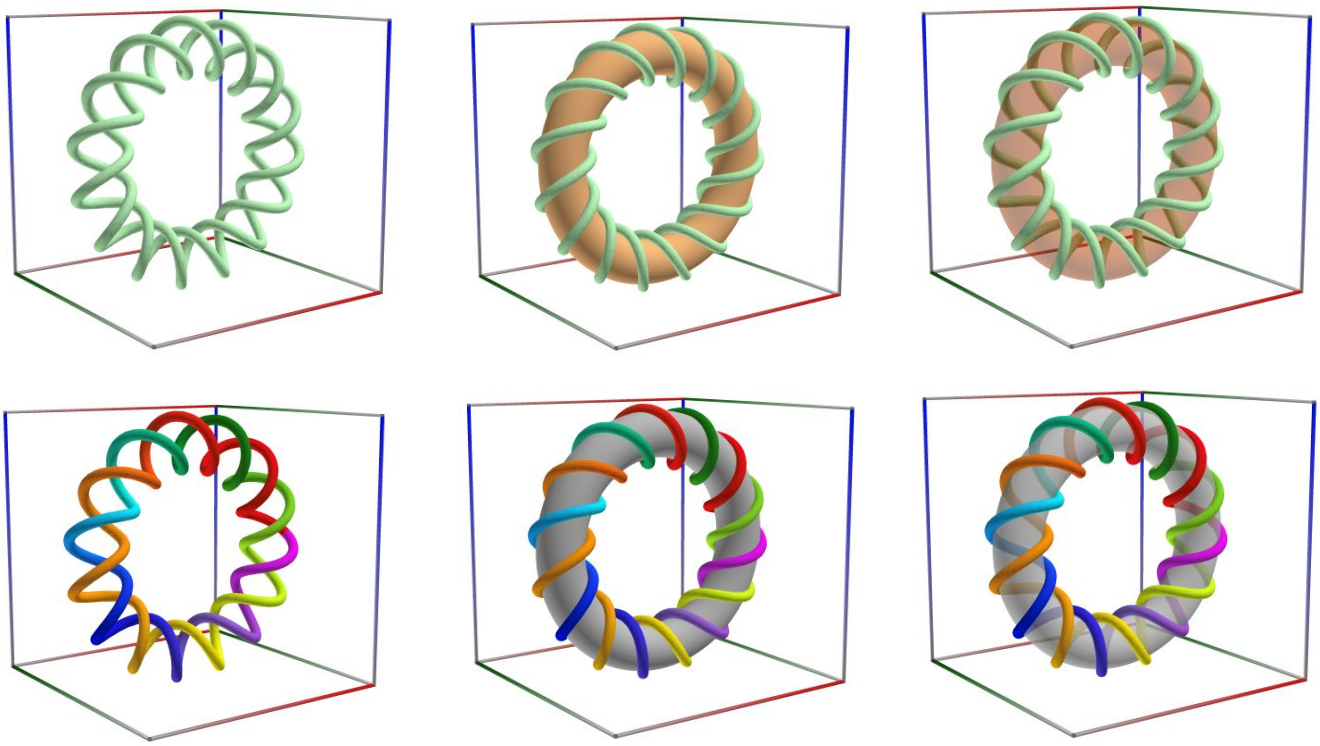

24.8 Lissajous knots

See also: https://en.wikipedia.org/wiki/Lissajous_knot

See also: https://mathcurve.com/courbes3d.gb/lissajous3d/noeudlissajous.shtml

See also: https://knotplot.com/manual/LissajousParams.html

The Lissajous knots are the knots associated to the 3D Lissajous curves when they are closed and without double point.

As is proved in the above article by Jones and Przytycki, they also are the knots associated to the trajectories of a ball (not subject to gravity) in a parallelepipedic billiard, or even a cubic one (imagine a glass box).

It can be proved that for all values of p, q, r, there exist values of j and y such that the knot is trivial, and that certain knots such as the trefoil knot are not Lissajous knots.

See also: https://mathcurve.com/courbes3d.gb/lissajous3d/lissajous3d.shtml

The 3D Lissajous curves are the trajectories of a point in space the rectangular components of which have a sinusoidal motion. The projections on the 3 coordinate planes are the classic 2D Lissajous curves.

For n = 1 or n = m, we get a cylindrical sine wave. We get a closed curve if and only if n and m are rational.

When the curve does not have double points, nor a cusp, it forms a knot in space, called Lissajous knot, equivalent to a cubic billiard knot.

24.8.1 Lissajous knot 1-1-1

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D01a_Path_111_LKnot_P090T090.3D.xml (D01a-f).

The example below uses the following code in C#

```
double pi = Math.PI;
double a1, k1, l1;
double a2, k2, l2;
double a3, k3, l3;
a1 = 100; k1 = 1; l1 = 0;
a2 = 100; k2 = 1; l2 = pi / 2;
a3 = 100; k3 = 1; l3 = pi / 2;
var x = (a1 * Math.Cos(k1 * t + l1)) / 50;
var y = (a3 * Math.Cos(k3 * t + l3)) / 50;
var z = (a2 * Math.Cos(k2 * t + l2)) / 50;
```

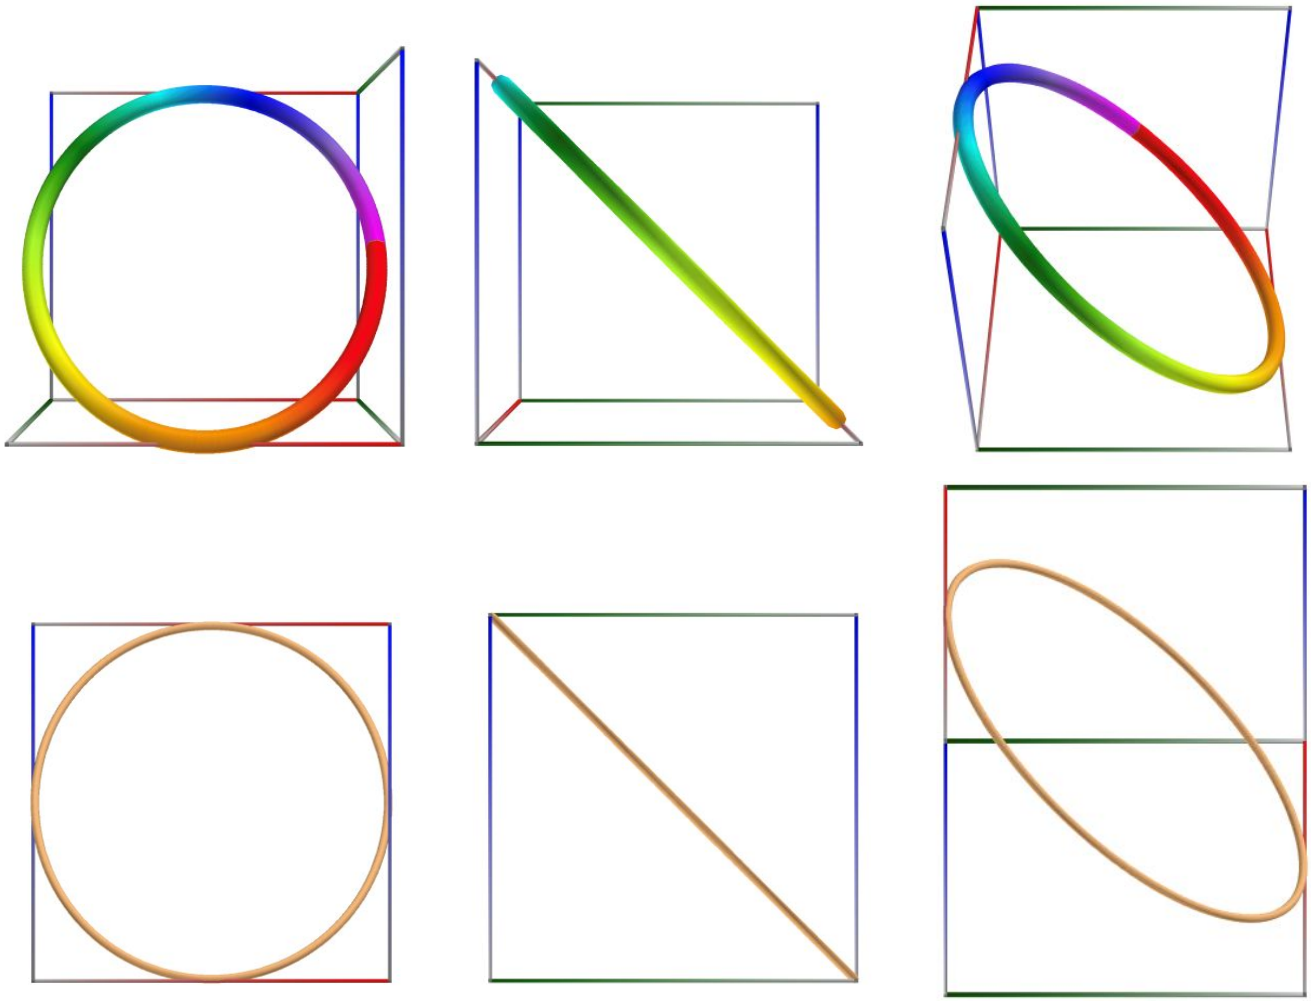

24.8.2 Lissajous knot 1-2-1

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D02a_Path_121_LKnot_P090T090.3D.xml (D02a-f).

The example below uses the following code in C#

```
double pi = Math.PI;
double a1, k1, l1;
double a2, k2, l2;
double a3, k3, l3;
a1 = 100; k1 = 1; l1 = 0;
a2 = 100; k2 = 2; l2 = pi / 2;
a3 = 100; k3 = 1; l3 = pi / 2;
var x = (a1 * Math.Cos(k1 * t + l1)) / 50;
var y = (a3 * Math.Cos(k3 * t + l3)) / 50;
var z = (a2 * Math.Cos(k2 * t + l2)) / 50;
```

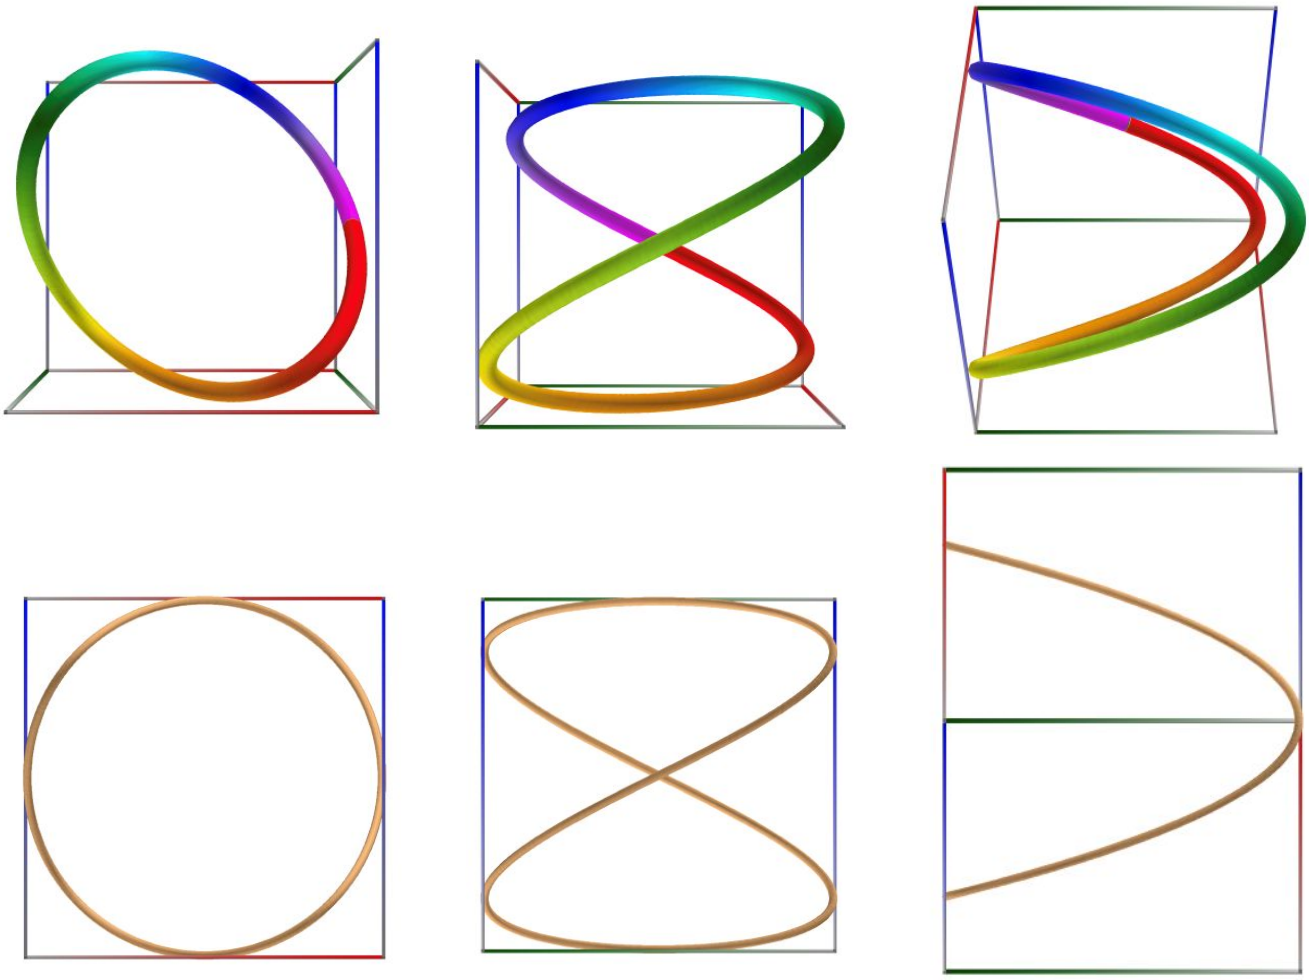

24.8.3 Lissajous knot 1-5-3

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D03a_Path_153_LKnot_P090T090.3D.xml (D03a-f).

The example below uses the following code in C#

```
double pi = Math.PI;
double a1, k1, l1;
double a2, k2, l2;
double a3, k3, l3;
a1 = 100; k1 = 1; l1 = 0;
a2 = 100; k2 = 5; l2 = pi / 2;
a3 = 100; k3 = 3; l3 = pi / 2;
var x = (a1 * Math.Cos(k1 * t + l1)) / 50;
var y = (a3 * Math.Cos(k3 * t + l3)) / 50;
var z = (a2 * Math.Cos(k2 * t + l2)) / 50;
```

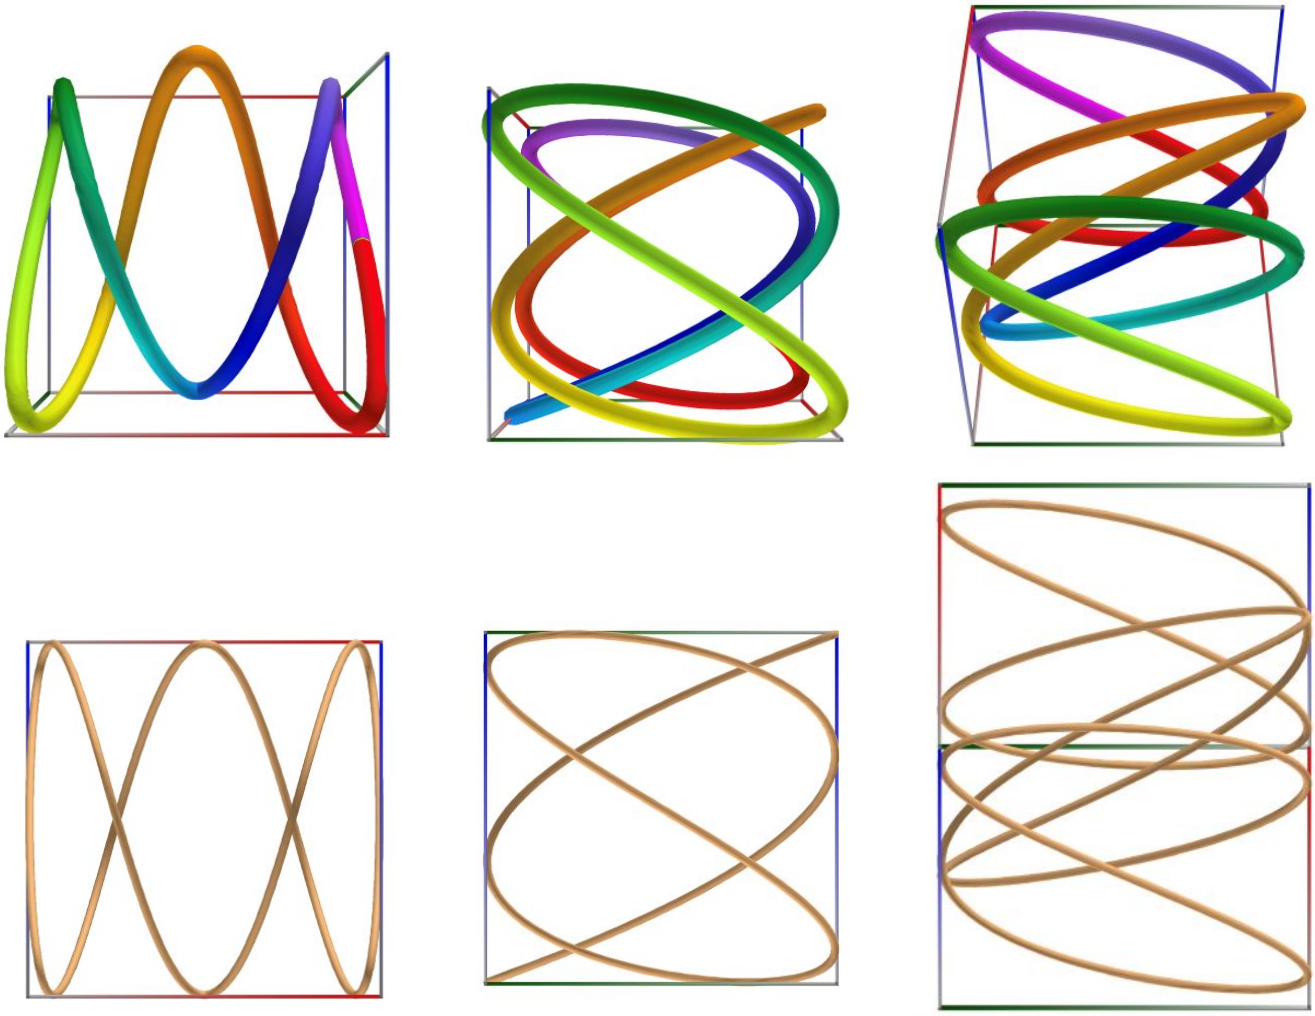

24.8.4 Lissajous knot 3-5-2

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D04a_Path_352_LKnot_P090T090.3D.xml (D04a-f).

The example below uses the following code in C#

```
double pi = Math.PI;
double a1, k1, l1;
double a2, k2, l2;
double a3, k3, l3;
a1 = 100; k1 = 3; l1 = 0;
a2 = 100; k2 = 5; l2 = pi / 2;
a3 = 100; k3 = 2; l3 = pi / 2;
var x = (a1 * Math.Cos(k1 * t + l1)) / 50;
var y = (a3 * Math.Cos(k3 * t + l3)) / 50;
var z = (a2 * Math.Cos(k2 * t + l2)) / 50;
```

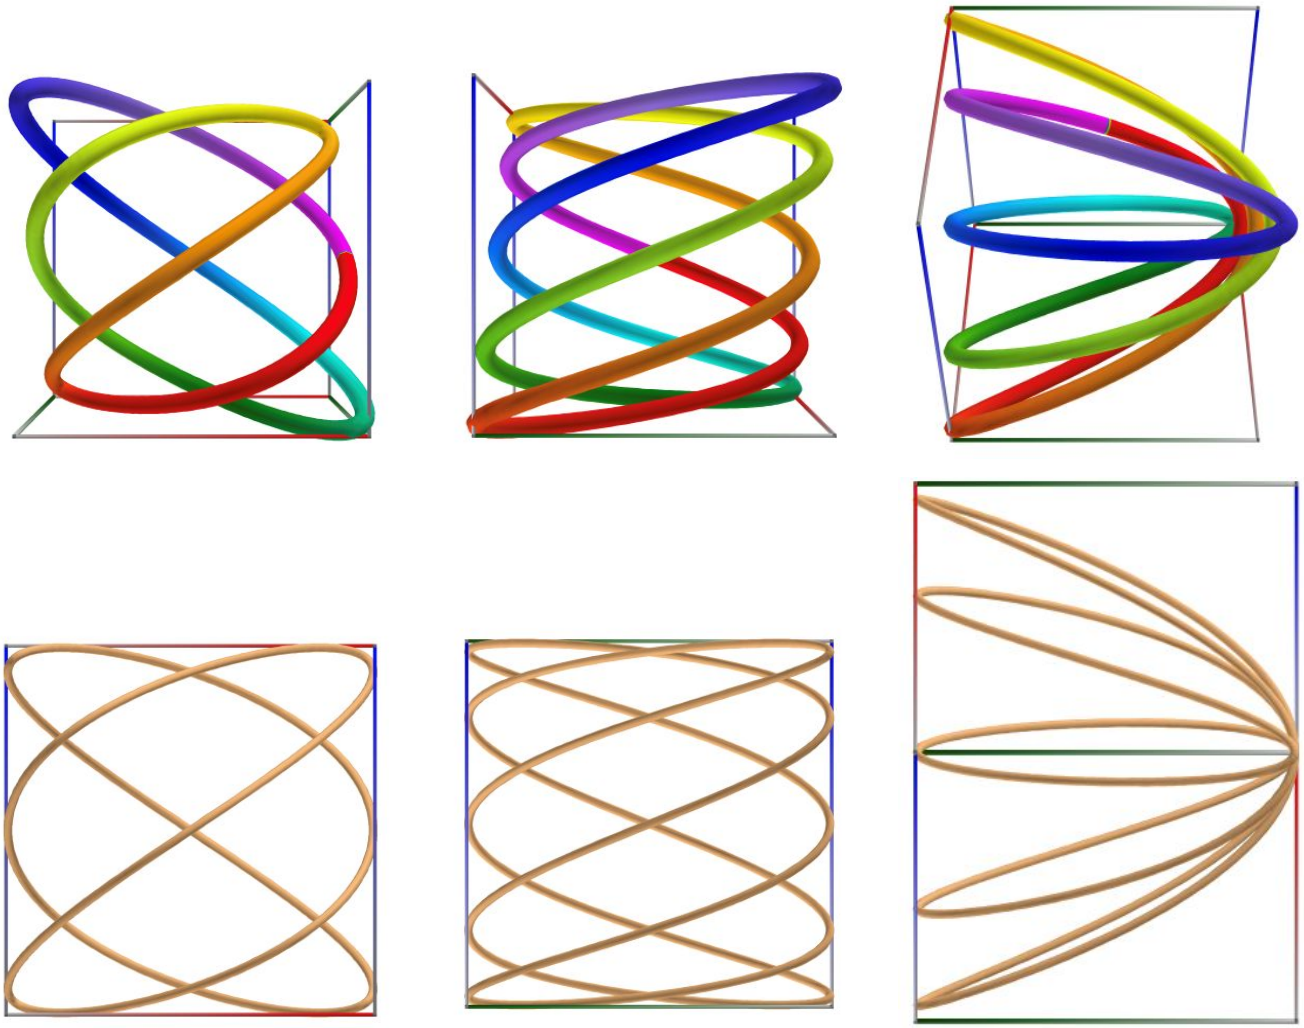

24.8.5 Lissajous knot 3-5-7

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D05a_Path_357_LKnot_P090T090.3D.xml (D05a-f).

The example below uses the following code in C#

```
double pi = Math.PI;
double a1, k1, l1;
double a2, k2, l2;
double a3, k3, l3;
a1 = 100; k1 = 3; l1 = 7;
a2 = 100; k2 = 5; l2 = 5;
a3 = 100; k3 = 7; l3 = 3;
var x = (a1 * Math.Cos(k1 * t + l1)) / 50;
var y = (a3 * Math.Cos(k3 * t + l3)) / 50;
var z = (a2 * Math.Cos(k2 * t + l2)) / 50;
```

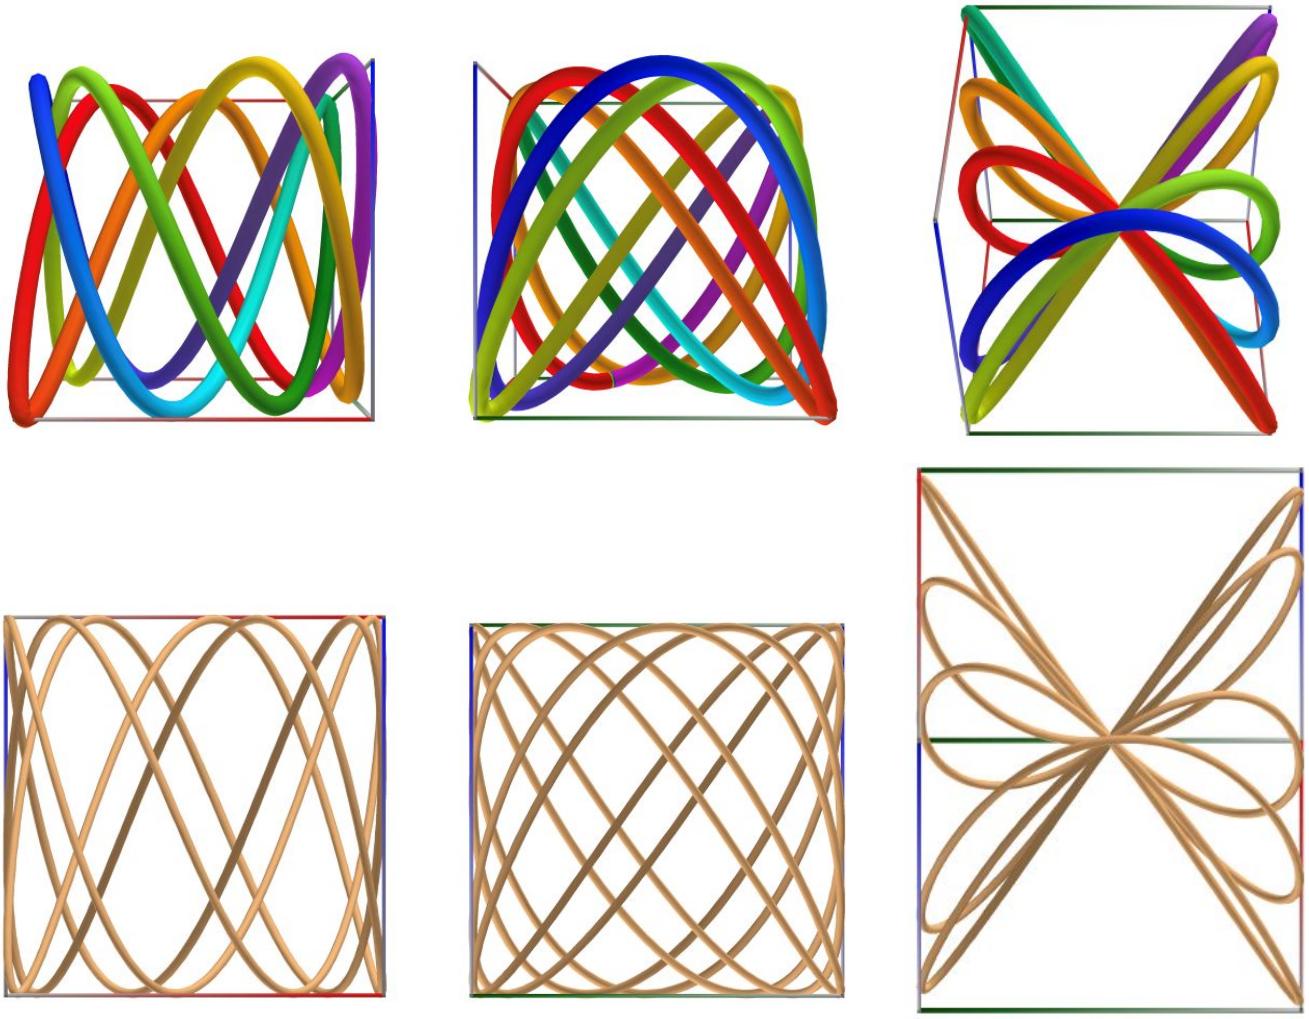

24.9 Polynomial knots

See also: https://home.adelphi.edu/~stemkoski/knotgallery/

24.9.1 Polynomial knot 3-1

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D01a_Path_Poly31Knot.3D.xml (D01a-c).

Polynomial Knot. https://home.adelphi.edu/~stemkoski/knotgallery/poly3.html

```
double t2 = t * t;
double t3 = t2 * t;
double t4 = t3 * t;
double t5 = t4 * t;
var x = (t3 - 3 * t) / 10;
var y = (t4 - 4 * t2) / 10;
var z = (t5 / 5 - 2 * t) / 10;
```

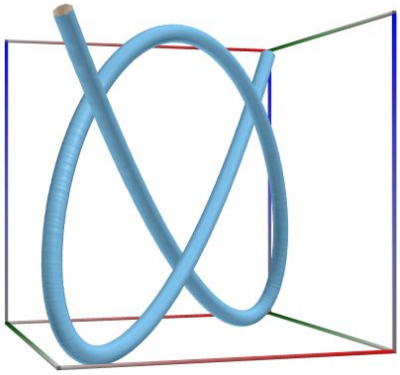
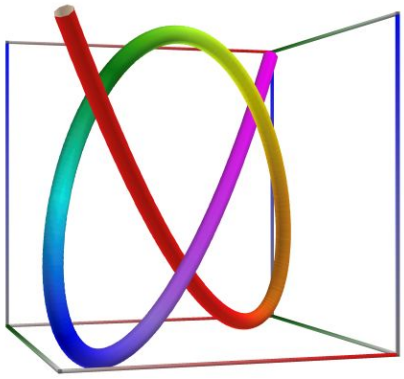
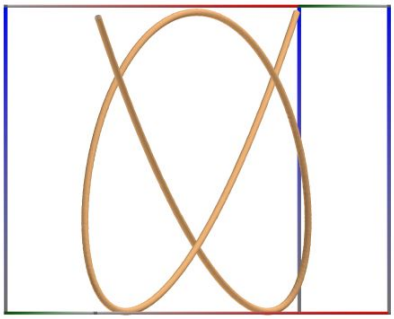

24.9.2 Polynomial knot 4-1

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D02a_Path_Poly41Knot.3D.xml (D02a-c).

Figure-Eight (41) Polynomial Knot. https://home.adelphi.edu/~stemkoski/knotgallery/poly3.html

```
double t2 = t * t;
double t4 = t2 * t2;
var x = (2.0 / 5.0) * t * (t2 - 7) * (t2 - 10) / 10;
var y = (t4 - 13 * t2) / 10;
var z = (1.0 / 10.0) * t * (t2 - 4) * (t2 - 9) * (t2 - 12) / 10;
```

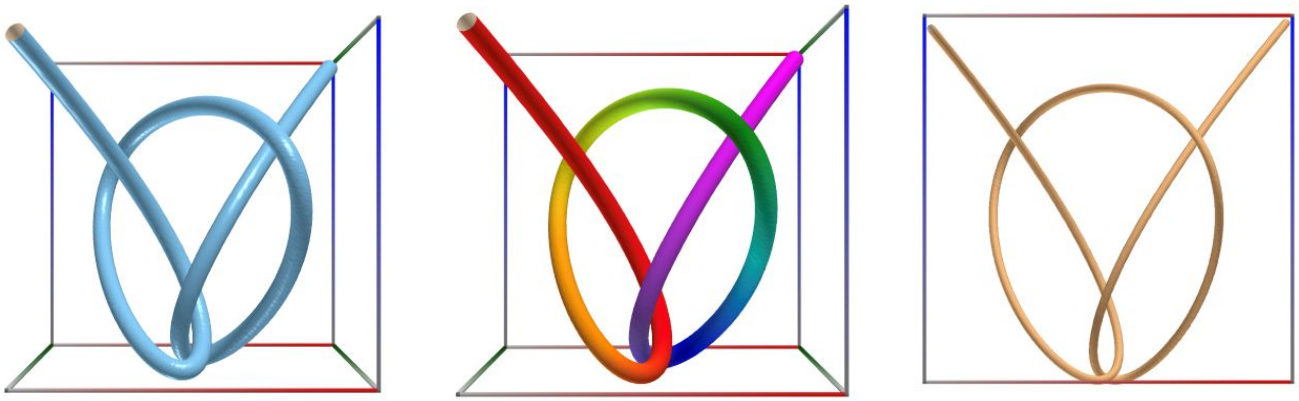

24.9.3 Polynomial knot 5-1

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D03a_Path_Poly51Knot.3D.xml (D03a-c).

Cinquefoil (51) Polynomial Knot. https://home.adelphi.edu/~stemkoski/knotgallery/poly3.html

```
double t2 = t * t;
double t3 = t2 * t;
double t4 = t3 * t;
double t5 = t4 * t;
double t6 = t5 * t;
double t7 = t6 * t;
var x = (1.0 / 5.0) * (t5 - 36 * t3 + 260 * t) / 10;
var y = (1.0 / 2.0) * (t4 - 24 * t2) / 10;
var z = (1.0 / 100.0) * (t7 - 31 * t5 + 164 * t3 - 560 * t) / 10;
```

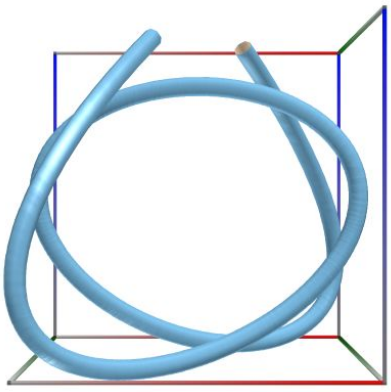
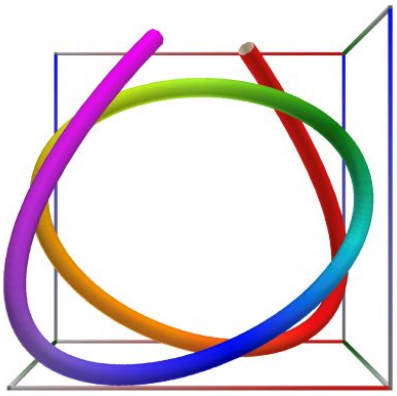
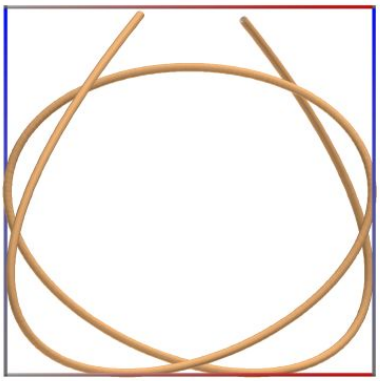

24.9.4 Polynomial knot 6-2

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D04a_Path_Poly62Knot.3D.xml (D04a-c).

Six-Crossing (62) Polynomial Knot. https://home.adelphi.edu/~stemkoski/knotgallery/poly3.html

```
double t2 = t * t;
double t3 = t2 * t;
double t4 = t3 * t;
var x = (3.0 / 4.0) * t * (t2 - 4) * (t2 - 11) / 10;
var y = (t4 - 12 * t2) / 10;
var z = (1.0 / 200.0) * t * (t2 - 1) * (t2 - 3) * (t2 - 9) * (t2 - 10) * (t2 - 12) / 10;
```

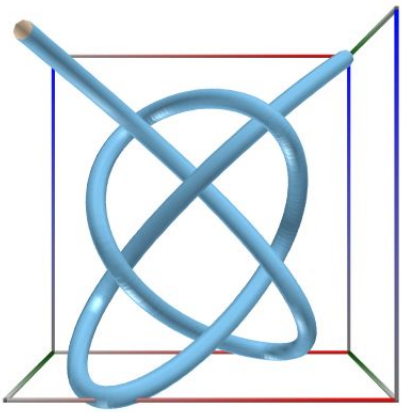
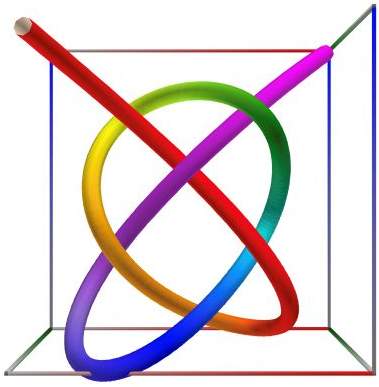
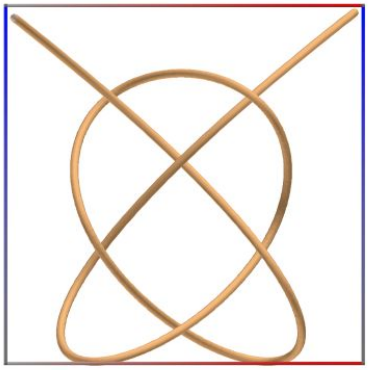

24.9.5 Polynomial knot 7-4

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D05a_Path_Poly74Knot.3D.xml (D05a-c).

Seven-Crossing (74) Polynomial Knot. https://home.adelphi.edu/~stemkoski/knotgallery/poly3.html

```
double t2 = t * t;
double t3 = t2 * t;
double t4 = t3 * t;
double t5 = t4 * t;
var x = (4.0 / 5.0) * t * (t2 - 6) * (t2 - 12) / 10;
var y = t2 * (t2 - 7) * (t2 - 9) / 10;
var z = (1.0 / 200.0) * t * (t2 - 0.2) * (t2 - 1) * (t2 - 5) * (t2 - 6.5) * (t2 - 9) * (t2 - 10) / 10;
```

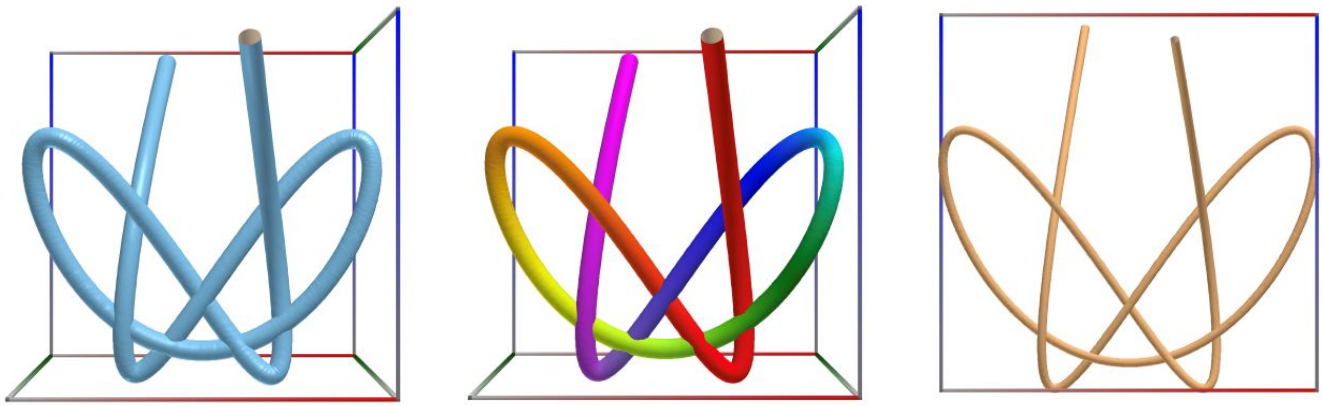

CHAPTER

TWENTYFIVE

WPF: BUILT-IN 3D OBJECTS

Some general text regarding Built-in 3D objects.

25.1 Builtin solids with support for textures

25.1.1 Sphere

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D01a_Sphere.3D.xml (D01a-f).

A sphere is a geometrical object that is a three-dimensional analogue to a two-dimensional circle.

See also: https://en.wikipedia.org/wiki/Sphere

See also: https://mathworld.wolfram.com/Sphere.html

See also: https://mathcurve.com/surfaces.gb/sphere/sphere.shtml

The example below uses the following code in C#

```
var radius = 1.0;
var numTheta = 20;
var numPhi = 20;
var proc = BuiltIn.SetSphere(radius, numTheta, numPhi);
```

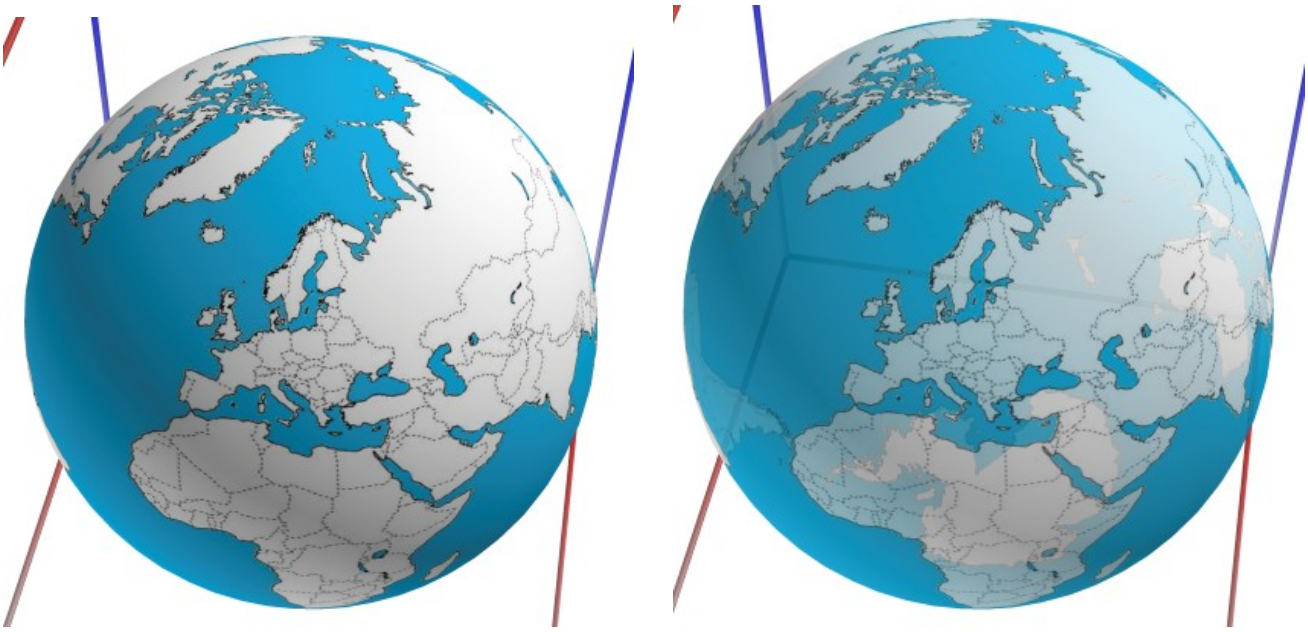

The example below uses the following code in C#

```
var radius = 1.0;
var numTheta = 20;
var numPhi = 20;
var proc = BuiltIn.SetSphere(radius, numTheta, numPhi);
```

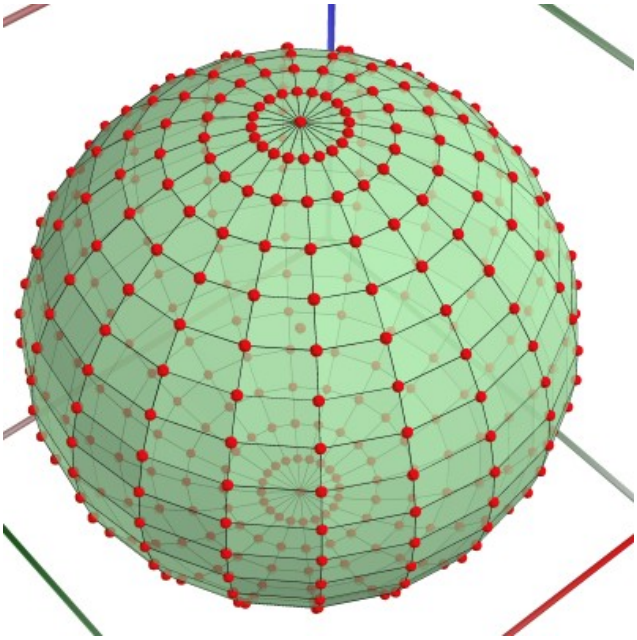

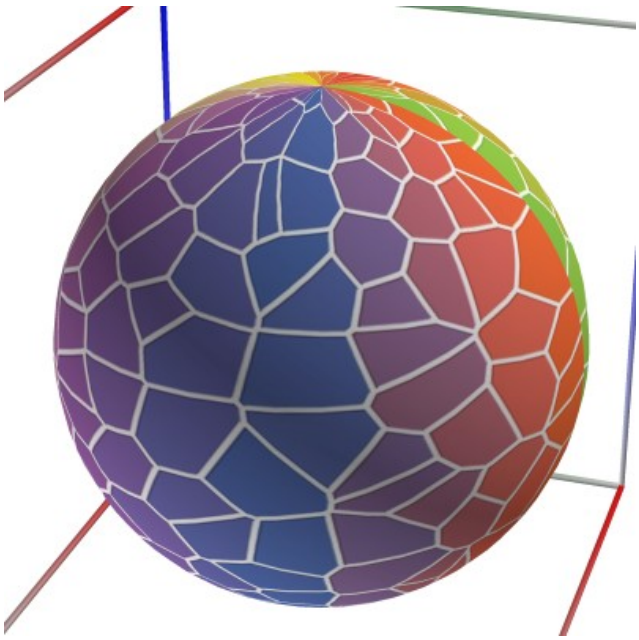

The example below uses the following code in C#

```
var radius = 1.0;
var numTheta = 20;
var numPhi = 20;
var proc = BuiltIn.SetSphere(radius, numTheta, numPhi);
```

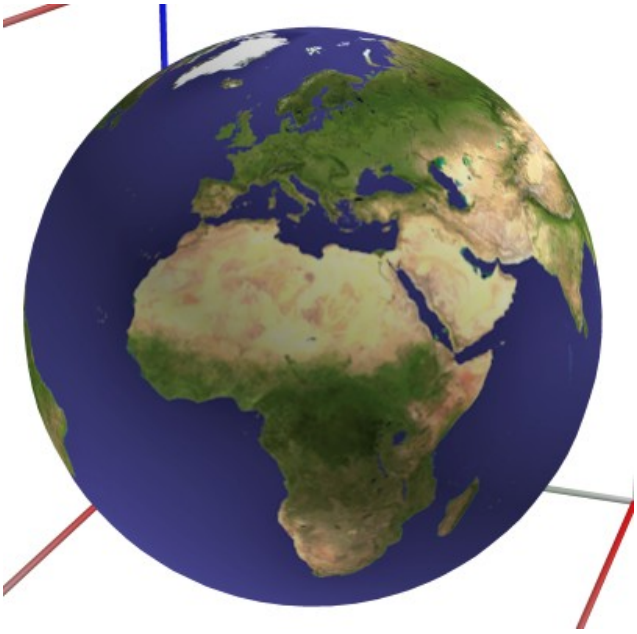

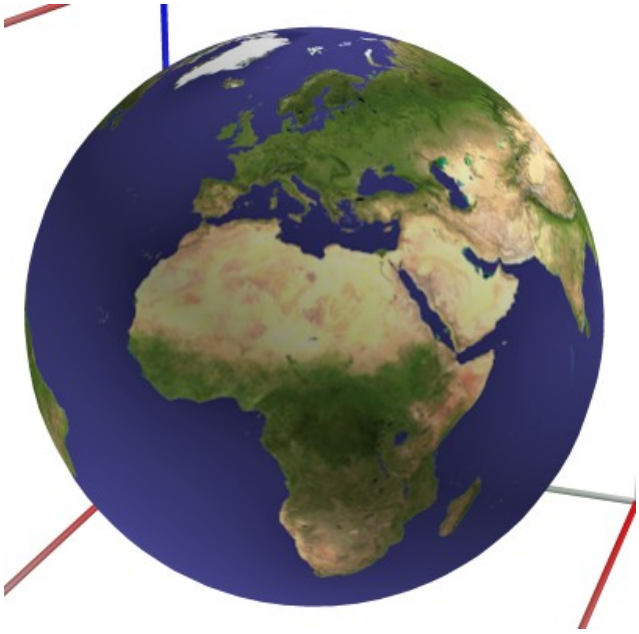

25.1.2 Prolate Spheroid

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D02a_PSpheroid.3D.xml (D02a-b).

See also: https://mathworld.wolfram.com/ProlateSpheroid.html

See also: https://mathworld.wolfram.com/Spheroid.html

See also: https://en.wikipedia.org/wiki/Spheroid#Prolate_spheroids

See also: https://en.wikipedia.org/wiki/Spheroid#

The example below uses the following code in C#

```
var radius = 1.0;
var factor1 = 1.5;
var numTheta = 20;
var numPhi = 20;
var proc = BuiltIn.SetProlateSpheroid(radius, factor1, numTheta, numPhi);
```

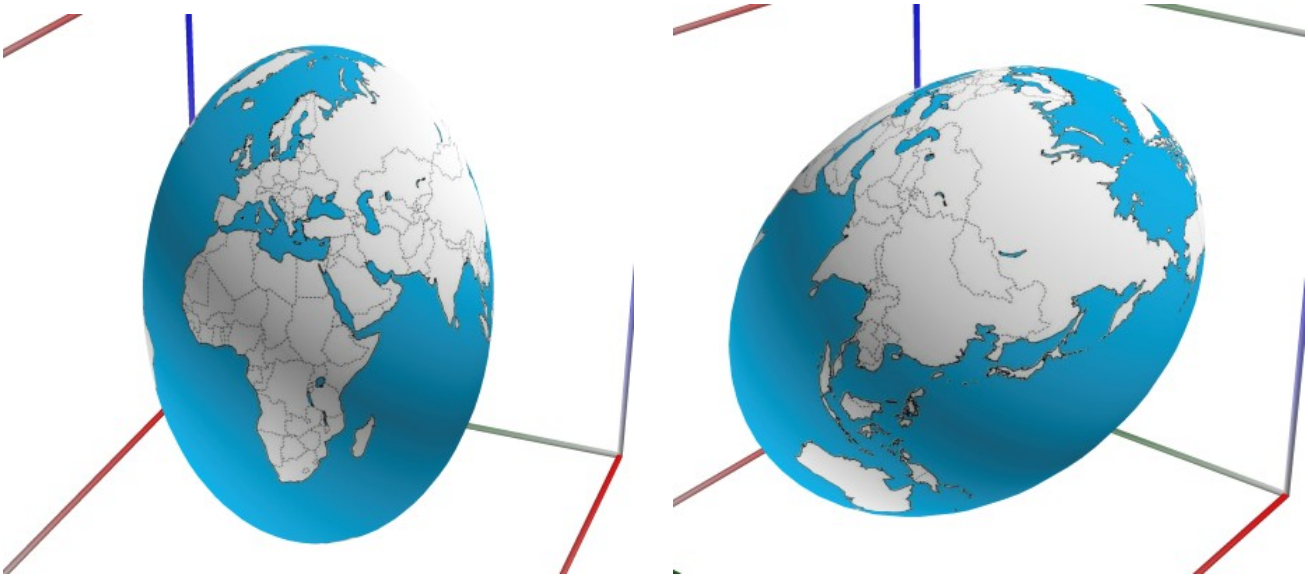

25.1.3 Oblate Spheroid

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D03a_OSpheroid.3D.xml (D03a-d).

See also: https://mathworld.wolfram.com/OblateSpheroid.html

See also: https://mathworld.wolfram.com/Spheroid.html

See also: https://en.wikipedia.org/wiki/Spheroid#Oblate_spheroids

See also: https://en.wikipedia.org/wiki/Spheroid#

The example below uses the following code in C#

```
var radius = 1.0;
var factor2 = 0.5;
var numTheta = 20;
var numPhi = 20;
var proc = BuiltIn.SetOblateSpheroid(radius, factor2, numTheta, numPhi);
```

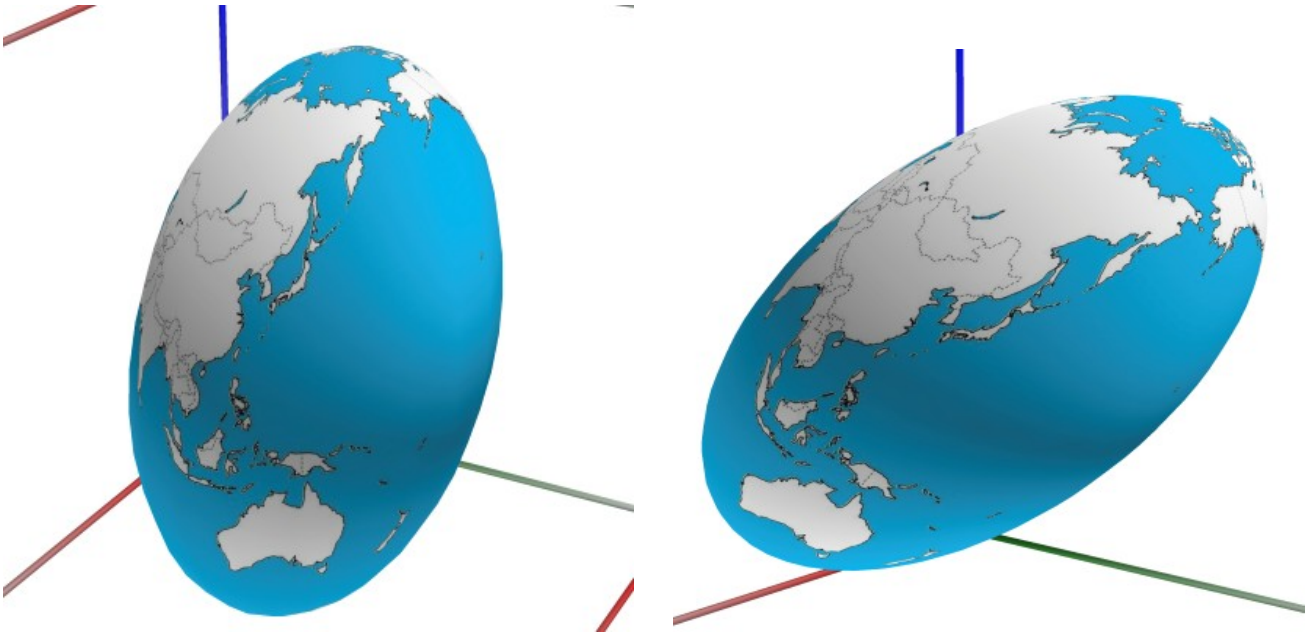

The example below uses the following code in C#

```
var radius = 1.0;
var factor2 = 0.5;
var numTheta = 20;
var numPhi = 20;
var proc = BuiltIn.SetOblateSpheroid(radius, factor2, numTheta, numPhi);
```

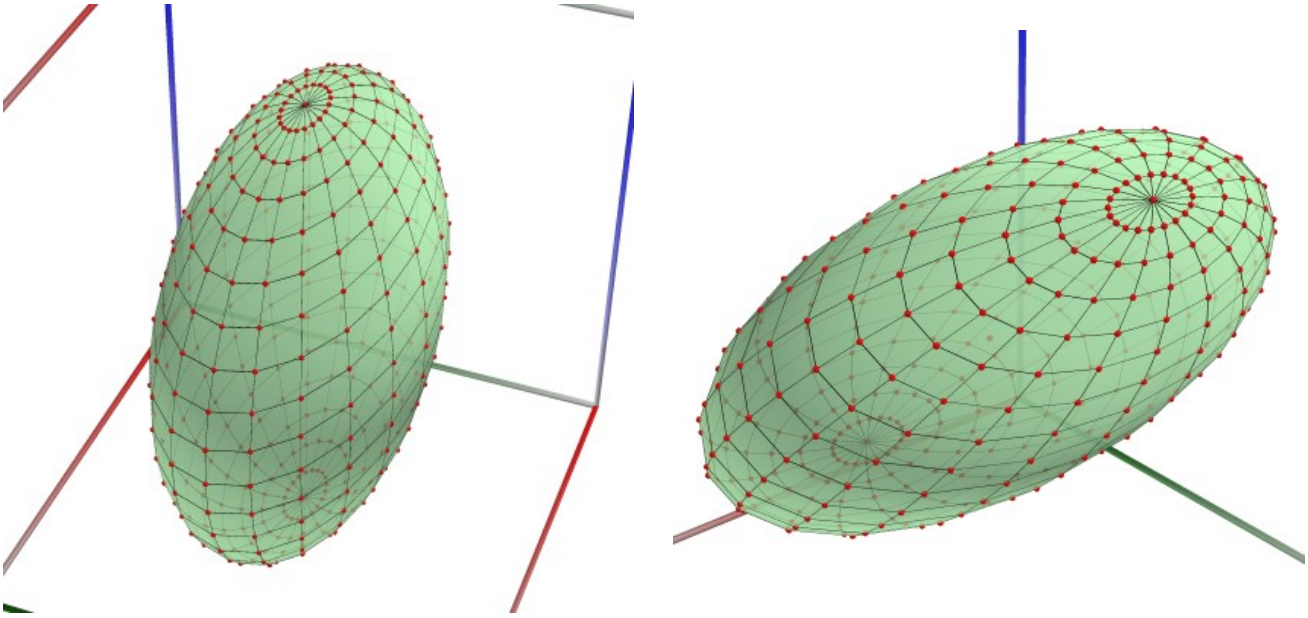

25.1.4 Ellipsoid

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D04a_Ellipsoid.3D.xml (D04a-b).

See also: https://mathworld.wolfram.com/Ellipsoid.html

See also: https://en.wikipedia.org/wiki/Ellipsoid

The example below uses the following code in C#

```
var radius = 1.0;
var factor1 = 1.5;
var factor2 = 0.5;
numTheta = 20;
var numPhi = 20;
var proc = BuiltIn.SetEllipsoid(radius, factor1, factor2, numTheta, numPhi);
```

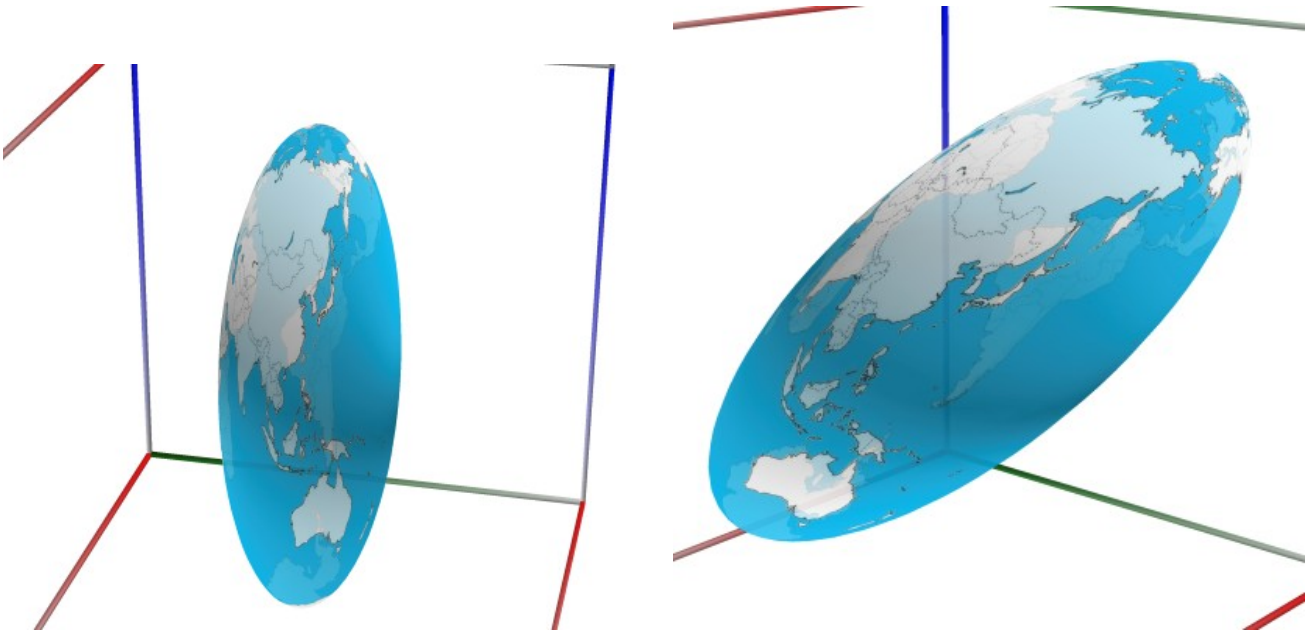

25.1.5 Torus

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D05a_Torus.3D.xml (D05a-b).

A torus is a surface of revolution generated by revolving a circle in three-dimensional space one full revolution about an axis that is coplanar with the circle. The main types of toruses include ring toruses, horn toruses, and spindle toruses. A ring torus is sometimes colloquially referred to as a donut or doughnut.

See also: https://en.wikipedia.org/wiki/Torus

See also: https://mathworld.wolfram.com/Torus.html

See also: https://mathcurve.com/surfaces.gb/tore/tore.shtml

```
var Radius = 0.6;
var radius = 0.2;
var numTheta = 40;
var numPhi = 40;
var proc = BuiltIn.SetTorus(Radius, radius, numTheta, numPhi);
```

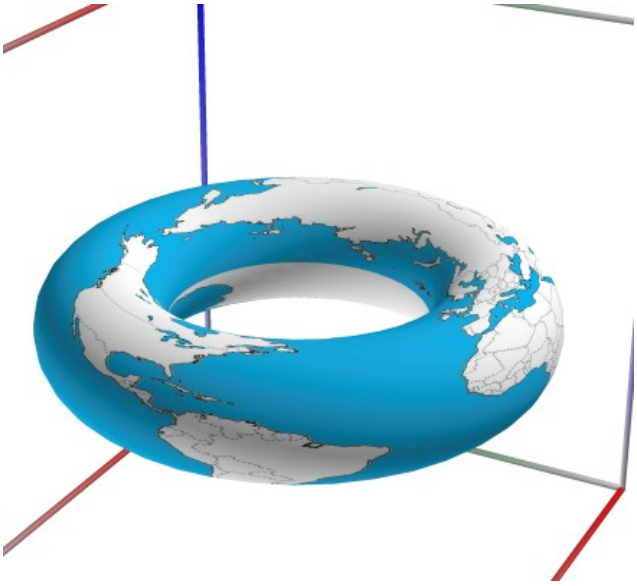

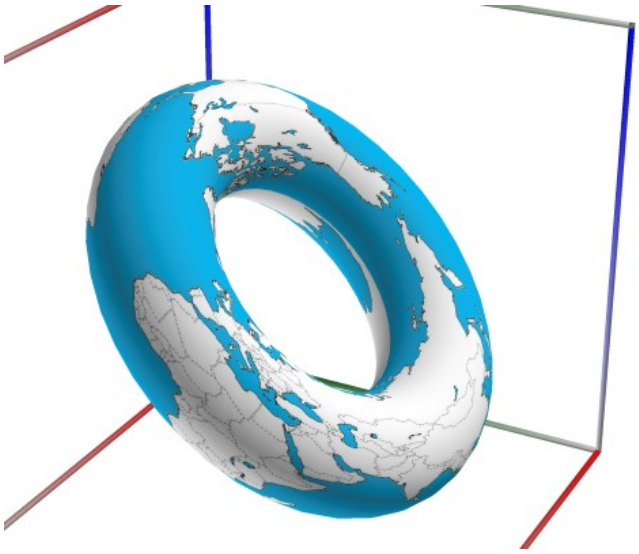

25.1.6 Rectangular cuboid

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D06a_Cuboid.3D.xml (D06a-b).

A rectangular cuboid is a special case of a cuboid with rectangular faces in which all of its dihedral angles are right angles. This shape is also called rectangular parallelepiped or orthogonal parallelepiped.

See also: https://en.wikipedia.org/wiki/Rectangular_cuboid

See also: https://mathworld.wolfram.com/Cuboid.html

The example below uses the following code in C#

```
var a = 1.0;
var b = 3.0;
var c = 2.0;
var proc = BuiltIn.SetCuboid(a, b, c);
```

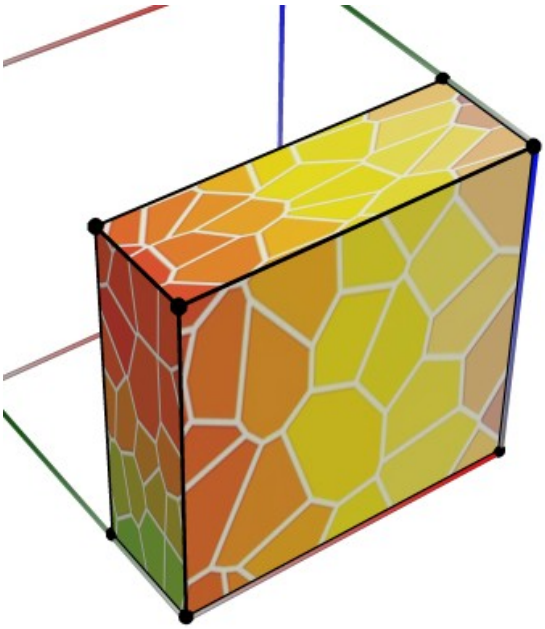

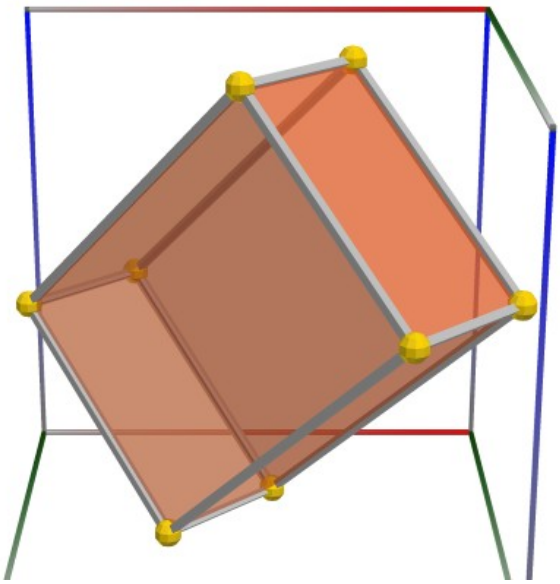

25.1.7 Rhombohedron

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D07a_Rhombohedron_60.3D.xml (D07a-c).

A rhombohedron is a parallelepiped bounded by six rhombi such that opposite faces are congruent. Special cases include the cube, acute golden rhombohedron, and obtuse golden rhombohedron.

See also: https://en.wikipedia.org/wiki/Rhombohedron

See also: https://mathworld.wolfram.com/Rhombohedron.html

See also: https://mathworld.wolfram.com/GoldenRhombohedron.html

See also: https://mathworld.wolfram.com/AcuteGoldenRhombohedron.html

See also: https://mathworld.wolfram.com/ObtuseGoldenRhombohedron.html

The example below uses the following code in C#

```
var theta = 60.0;
var proc = BuiltIn.SetRhombohedron(theta);
```

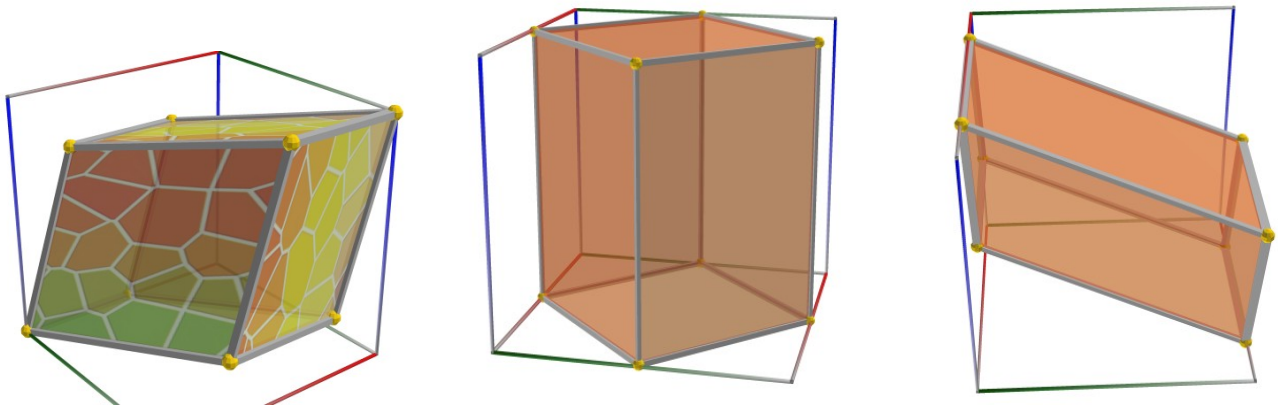

25.1.8 Parallelepiped

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D08a_Parallelepiped.3D.xml (D08a-b).

See also: https://en.wikipedia.org/wiki/Parallelepiped

See also: https://mathworld.wolfram.com/Parallelepiped.html

The example below uses the following code in C#

```
var a = 1.0;
var b = 3.0;
var c = 2.0;
var alpha = 90.0;
var beta = 90.0;

var proc = BuiltIn.SetParallelepiped(a, b, c, alpha, beta);
```

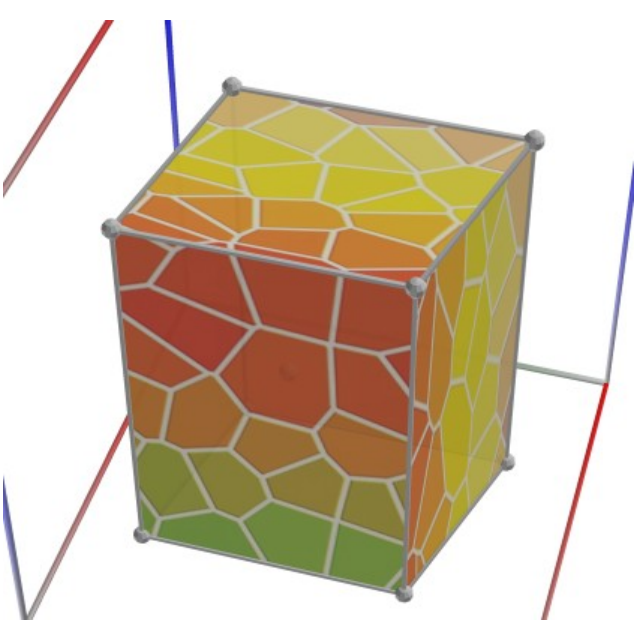

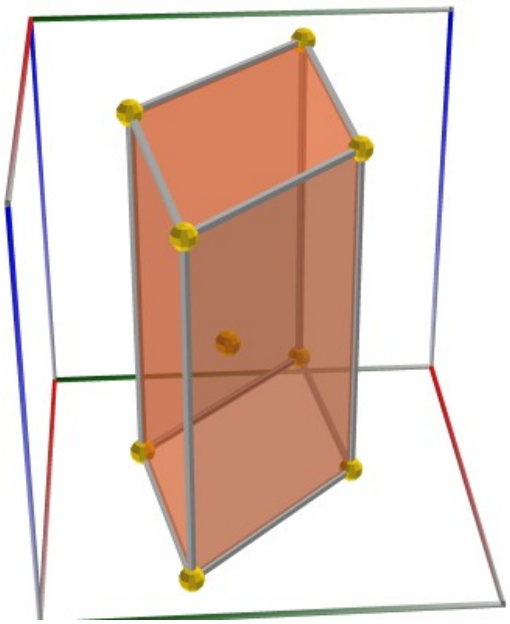

25.2 Builtin solids without support for textures

See also: https://mathworld.wolfram.com/topics/Prisms.html

See also: https://en.wikipedia.org/wiki/Prism_(geometry)

A prism is a polyhedron comprising an n-sided polygon base, a second base which is a translated copy (rigidly moved without rotation) of the first, and n other faces, necessarily all parallelograms, joining corresponding sides of the two bases. All cross-sections parallel to the bases are translations of the bases. Prisms are named after their bases, e.g. a prism with a pentagonal base is called a pentagonal prism.

25.2.1 Triangular Prism

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D01a_TriangularPrism.3D.xml (D01a-b).

A triangular prism or trigonal prism[1] is a prism with 2 triangular bases. If the edges pair with each triangle's vertex and if they are perpendicular to the base, it is a right triangular prism.

See also: https://mathworld.wolfram.com/TriangularPrism.html

See also: https://en.wikipedia.org/wiki/Triangular_prism

The example below uses the following code in C#

```
var a = 0.50;
var b = 0.50;
var height = 1.0;
var proc = BuiltIn.SetTriangularPrism(a, b, height, 0,0);
```

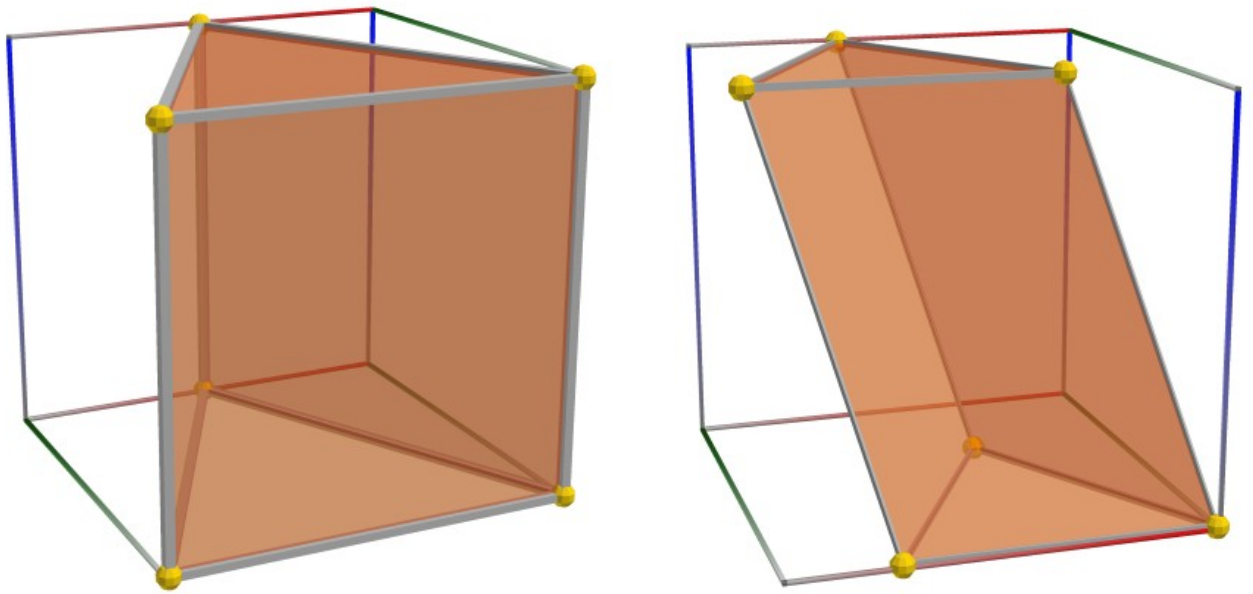

25.2.2 Square prism

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D02a_SquarePrism.3D.xml (D02a-b).

See also: https://mathworld.wolfram.com/Cube.html

See also: https://en.wikipedia.org/wiki/Cuboid

Cuboids have different types. A special case of a cuboid is a rectangular cuboid, with six rectangle faces and adjacent faces meeting at right angles. When all of the rectangular cuboid's edges are equal in length, it results in a cube, with six square faces and adjacent faces meeting at right angles.[1][3] Along with the rectangular cuboids, parallelepiped is a cuboid with six parallelogram. Rhombohedron is a cuboid with six rhombus faces. A square frustum is a frustum with a square base, but the rest of its faces are quadrilaterals.

The example below uses the following code in C#

```
var a = 0.50;
var b = 0.50;
var height = 0.55;
var proc = BuiltIn.SetSquarePrism(a, b, height, 0,0);
```

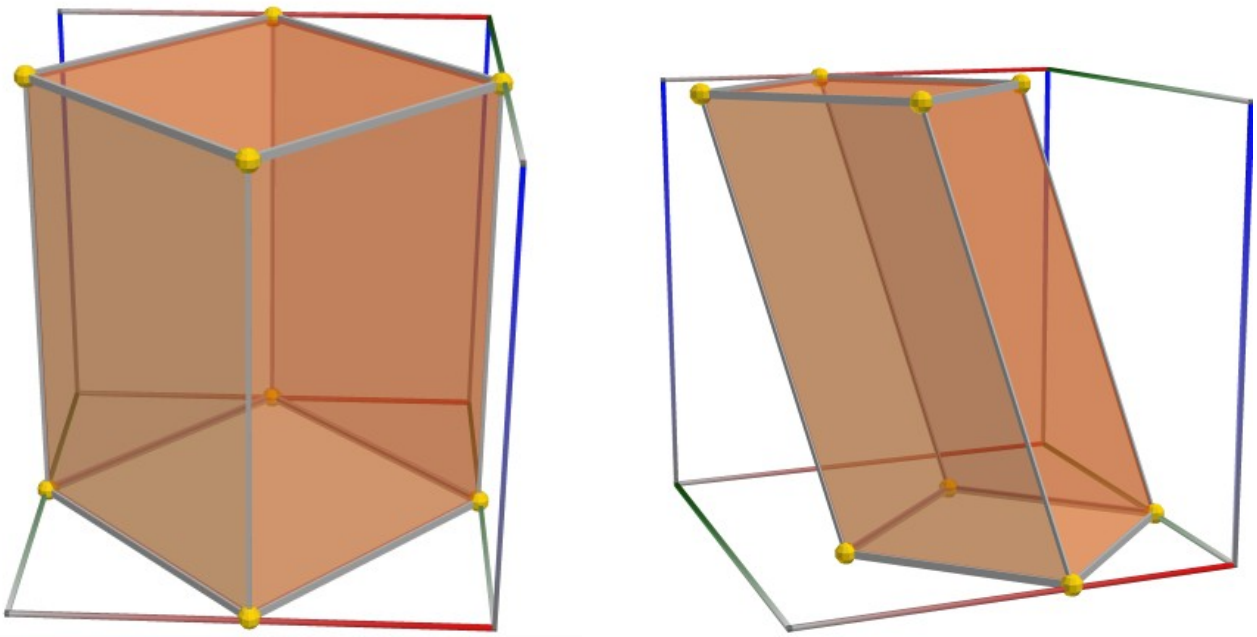

25.2.3 Hexagonal prism

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D03a_HexagonalPrism.3D.xml (D03a-b).

The hexagonal prism is a prism with hexagonal base. Prisms are polyhedrons; this polyhedron has 8 faces, 18 edges, and 12 vertices.

See also: https://mathworld.wolfram.com/HexagonalPrism.html

See also: https://en.wikipedia.org/wiki/Hexagonal_prism

The example below uses the following code in C#

```
var a = 0.50;
var b = 0.50;
var height = 1.0;
var proc = BuiltIn.SetHexagonalPrism(a, b, height, 0,0);
```

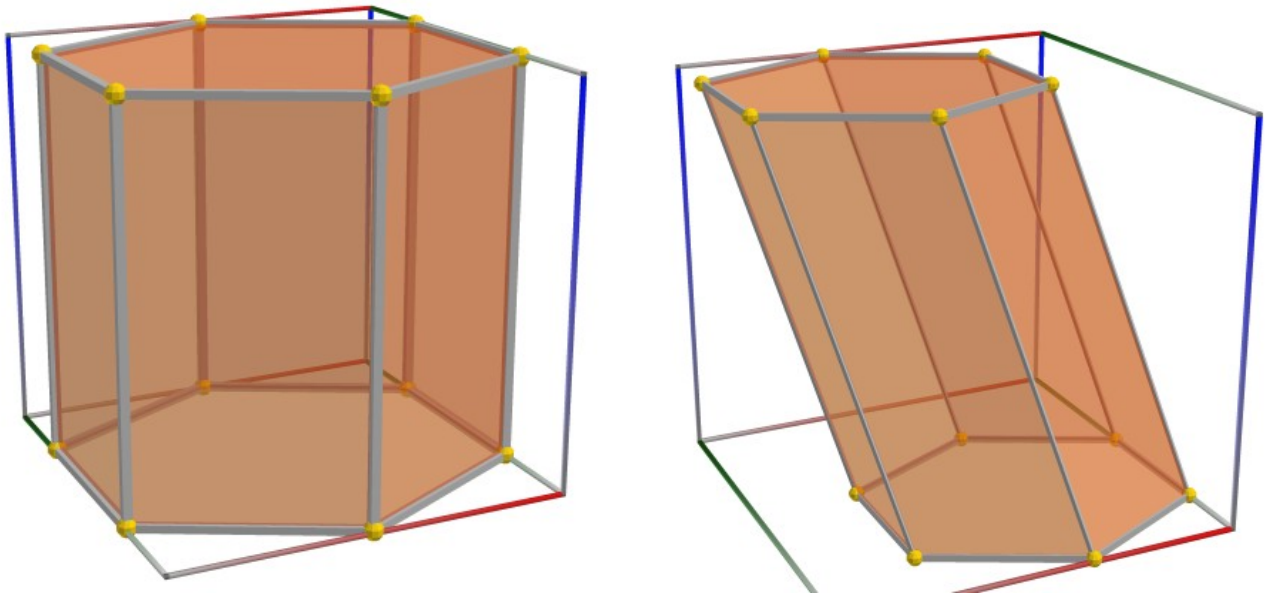

25.2.4 Octagonal prism

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D04a_OctagonalPrism.3D.xml (D04a-b).

The octagonal prism is a prism comprising eight rectangular sides joining two regular octagon caps.

See also: https://mathworld.wolfram.com/OctagonalPrism.html

See also: https://en.wikipedia.org/wiki/Octagonal_prism

The example below uses the following code in C#

```
var a = 0.50;
var b = 0.50;
var height = 1.0;
var proc = BuiltIn.SetOctagonalPrism(a, b, height, 0,0);
```

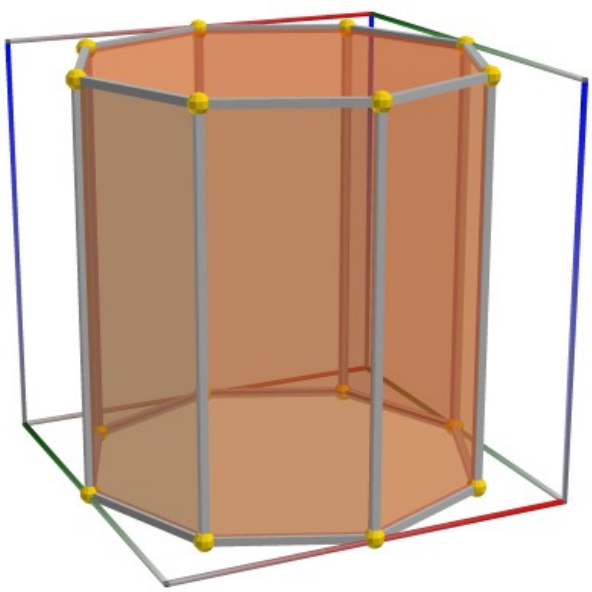

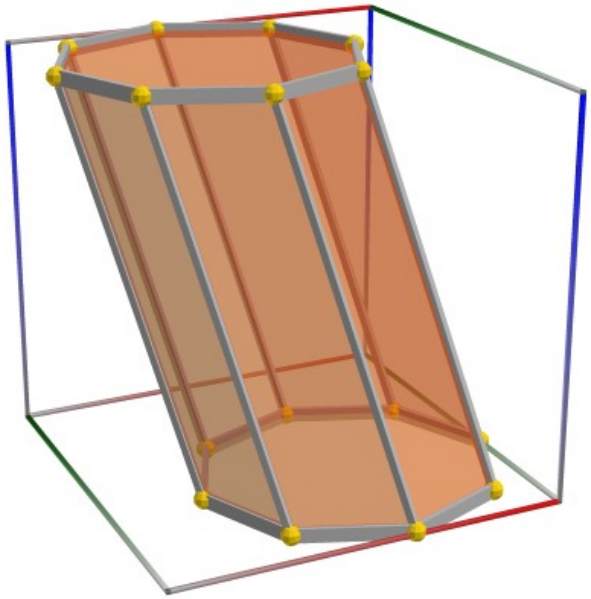

25.2.5 Cylinder

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05a_Cylinder.3D.xml.

A cylinder is considered a prism with a circle as its base. The cylinder obtained by rotating a line segment about a fixed line that it is parallel to is a cylinder of revolution. A cylinder of revolution is a right circular cylinder.

See also: https://en.wikipedia.org/wiki/Cylinder

See also: https://en.wikipedia.org/wiki/Right_circular_cylinder

See also: https://mathworld.wolfram.com/Cylinder.html

The example below uses the following code in C#

```
var numSides = 7;
var a = 0.50;
var b = 0.50;
var height = 1.0;
var proc = BuiltIn.SetCylinder(numSides, a, b, height, 0,0);
```

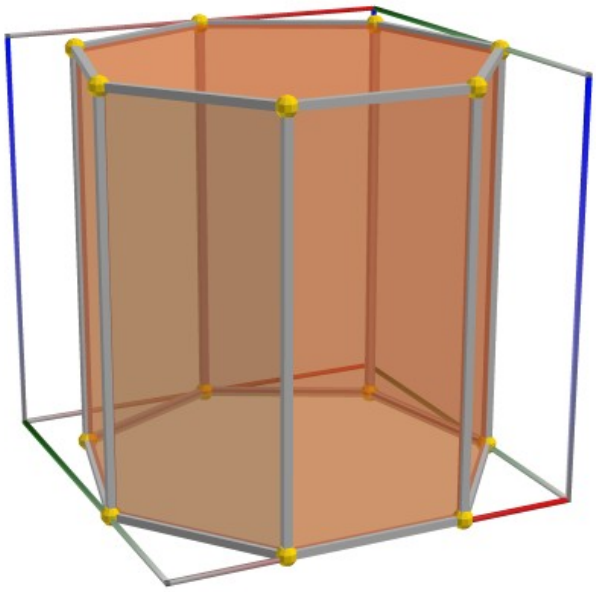

25.2.6 Cylinder, truncated by an inclined plane

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the files D06a_Cylinder_Tilted.3D.xml (D06a-b).

A cylinder is considered a prism with a circle as its base. The cylinder obtained by rotating a line segment about a fixed line that it is parallel to is a cylinder of revolution. A cylinder of revolution is a right circular cylinder.

See also: https://en.wikipedia.org/wiki/Cylinder

See also: https://en.wikipedia.org/wiki/Right_circular_cylinder

See also: https://mathworld.wolfram.com/Cylinder.html

The example below uses the following code in C#

```
var numSides = 7;
var a = 0.50;
var b = 0.50;
var height = 1.0;
var cutslope1 = -0.5;
var cutslope2 = 0.5;
var proc = BuiltIn.SetCylinder2CP(numSides, a, b, height, cutslope1, cutslope2);
```

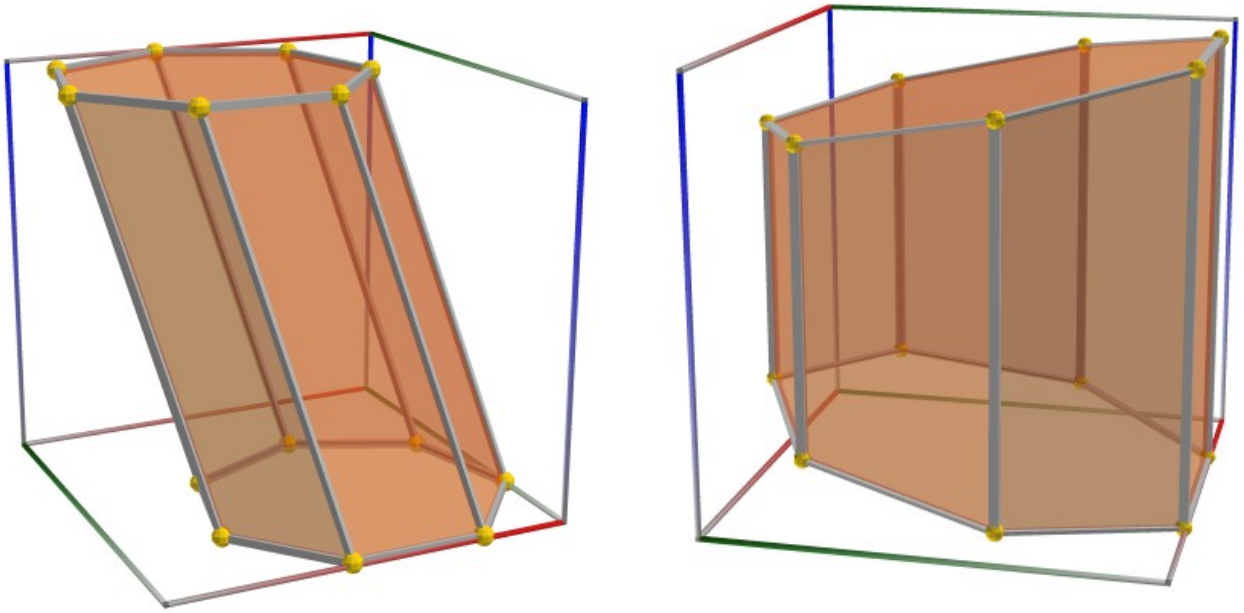

25.2.7 Pyramid

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07a_Pyramid.3D.xml.

A pyramid is a polyhedron formed by connecting a polygonal base and a point, called the apex. Each base edge and apex form a triangle, called a lateral face. It is a conic solid with a polygonal base. Many types of pyramids can be found by determining the shape of bases, or cutting off the apex.

See also: https://en.wikipedia.org/wiki/Pyramid_(geometry)

See also: https://mathworld.wolfram.com/Pyramid.html

The example below uses the following code in C#

```
var numSides = 7;
var a = 0.50;
var b = 0.50;
var height = 1.0;
var proc = BuiltIn.SetPyramid(numSides, a, b, height);
```

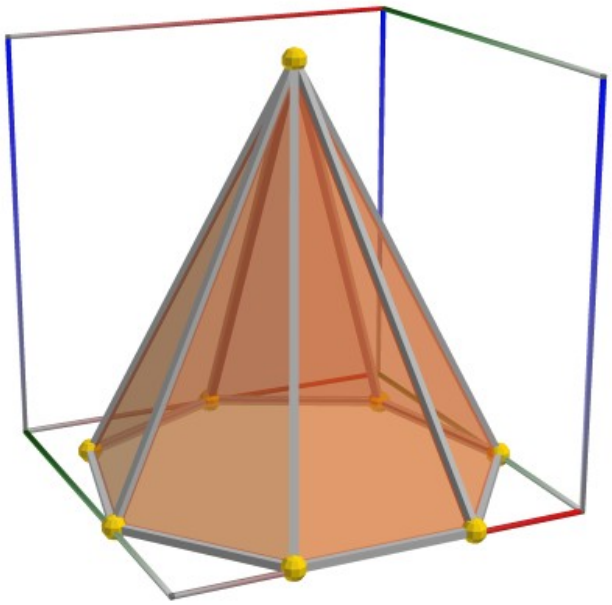

25.2.8 Pyramid frustum

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D08a_Frustum.3D.xml.

A frustum of a pyramid is the portion of the pyramid that lies between two parallel planes cutting the pyramid. In a truncated pyramid, the truncation plane is not necessarily parallel to the pyramid's base (as in a frustum), i.e. it is inclined.

See also: https://en.wikipedia.org/wiki/Frustum

See also: https://mathworld.wolfram.com/PyramidalFrustum.html

The example below uses the following code in C#

```
var numSides = 7;
var a = 0.50;
var b = 0.50;
var height = 1.2;
var cutheight = 0.8;
var cutslope = 0.0;
var proc = BuiltIn.SetFrustum(numSides, a, b, height, cutheight, cutslope);
```

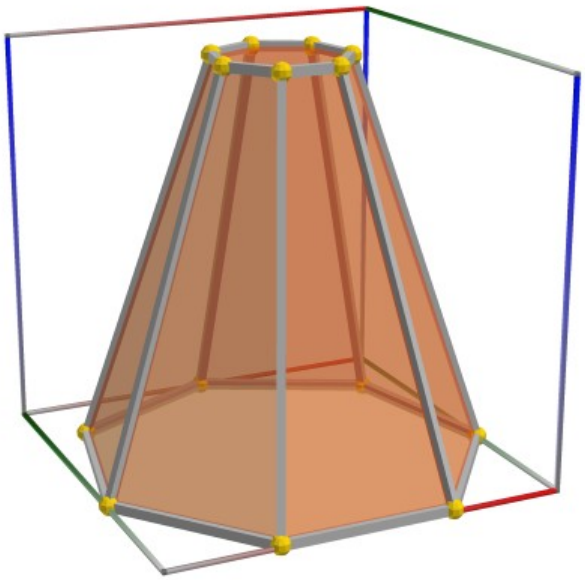

25.2.9 Pyramid, truncated by an inclined plane

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D09a_Frustum_Inclined.3D.xml.

A frustum of a pyramid is the portion of the pyramid that lies between two parallel planes cutting the pyramid. In a truncated pyramid, the truncation plane is not necessarily parallel to the pyramid's base (as in a frustum), i.e. it is inclined.

See also: https://en.wikipedia.org/wiki/Frustum

See also: https://mathworld.wolfram.com/PyramidalFrustum.html

The example below uses the following code in C#

```
var numSides = 7;
var a = 0.50;
var b = 0.50;
var height = 1.2;
var cutheight = 0.8;
var cutslope = 0.3;
var proc = BuiltIn.SetFrustum(numSides, a, b, height, cutheight, cutslope);
```

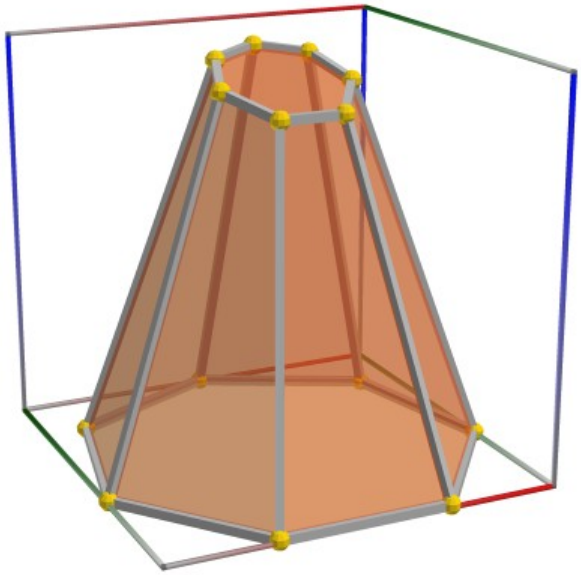

25.2.10 Cone

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D10a_Cone.3D.xml.

A cone is a three-dimensional geometric shape that tapers smoothly from a flat base (frequently, though not necessarily, circular) to a point called the apex or vertex. A cone with a polygonal base is called a pyramid.

See also: https://en.wikipedia.org/wiki/Cone

See also: https://mathworld.wolfram.com/Cone.html

The example below uses the following code in C#

```
var numSides = 32;
var a = 0.50;
var b = 0.50;
var height = 1.0;
var proc = BuiltIn.SetCone(numSides, a, b, height);
```

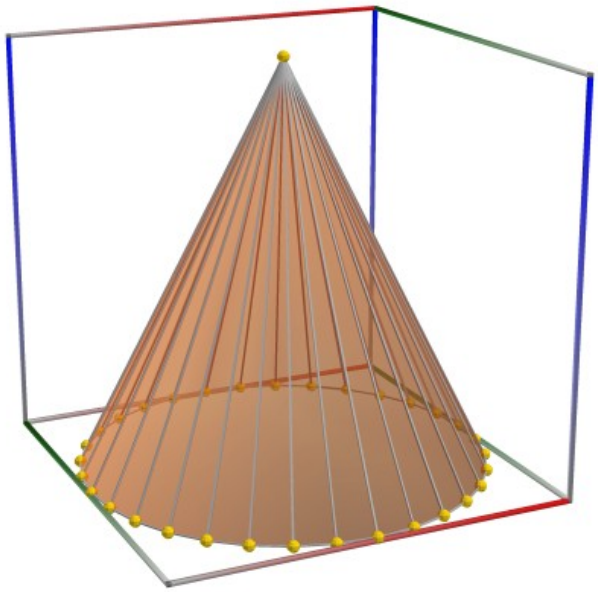

25.2.11 Cone Frustum

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D11a_ConeFrustum.3D.xml.

A cone is a three-dimensional geometric shape that tapers smoothly from a flat base (frequently, though not necessarily, circular) to a point called the apex or vertex. A cone with a polygonal base is called a pyramid.

See also: https://en.wikipedia.org/wiki/Frustum

See also: https://mathworld.wolfram.com/ConicalFrustum.html

The example below uses the following code in C#

```
var numSides = 32;
var a = 0.50;
var b = 0.50;
var height = 1.2;
var cutheight = 0.6;
var cutslope = 0.0;
var proc = BuiltIn.SetConeFrustum(numSides, a, b, height, cutheight, cutslope);
```

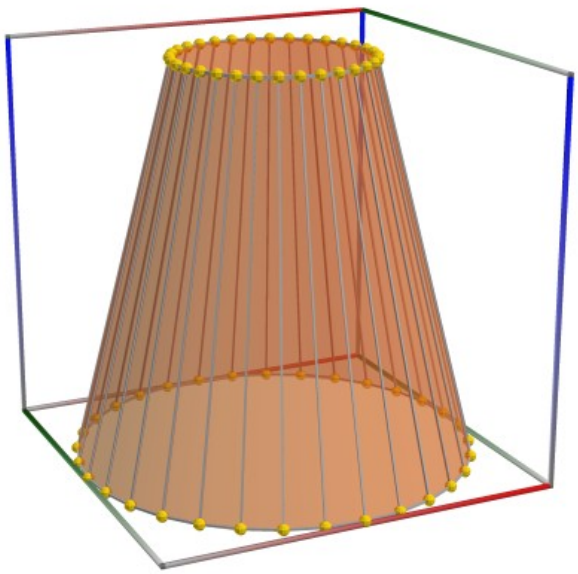

25.2.12 Cone, truncated by an inclined plane

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D12a_ConeFrustum_Inclined.3D.xml.

A cone is a three-dimensional geometric shape that tapers smoothly from a flat base (frequently, though not necessarily, circular) to a point called the apex or vertex. A cone with a polygonal base is called a pyramid.

See also: https://en.wikipedia.org/wiki/Frustum

See also: https://mathworld.wolfram.com/ConicalFrustum.html

The example below uses the following code in C#

```
var numSides = 32;
var a = 0.50;
var b = 0.50;
var height = 1.2;
var cutheight = 0.6;
var cutslope = 0.3;
var proc = BuiltIn.SetConeFrustum(numSides, a, b, height, cutheight, cutslope);
```

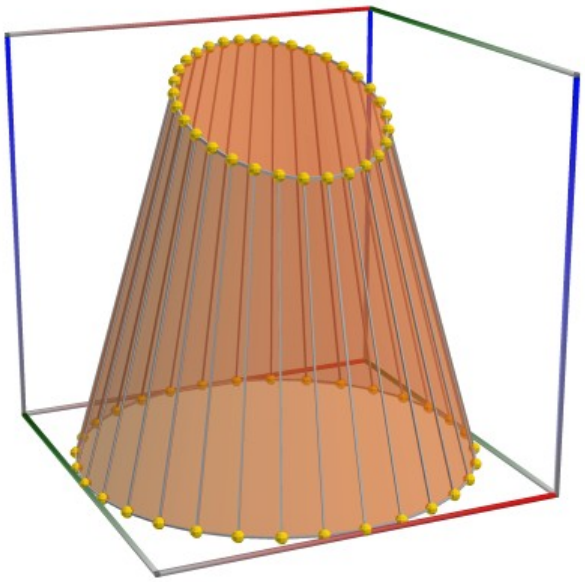

25.3 Platonic solids, and related solids

A Platonic solid is a convex, regular polyhedron in three-dimensional Euclidean space. Being a regular polyhedron means that the faces are congruent (identical in shape and size) regular polygons (all angles congruent and all edges congruent), and the same number of faces meet at each vertex.

See also: https://en.wikipedia.org/wiki/Platonic_solid

See also: https://mathworld.wolfram.com/PlatonicSolid.html

Augmentation is the operation of replacing the faces of a polyhedron with pyramids of height h (where h may be positive, zero, or negative) having the face as the base. Augmentation with $h = 0$ gives a triangulated version of the original solid.

See also: https://mathworld.wolfram.com/Augmentation.html

25.3.1 Tetrahedron

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D01a_Tetrahedron.3D.xml.

A regular tetrahedron is a tetrahedron in which all four faces are equilateral triangles. In other words, all of its faces are the same size and shape (congruent) and all edges are the same length.

See also: https://en.wikipedia.org/wiki/Tetrahedron#Regular_tetrahedron

See also: https://mathworld.wolfram.com/RegularTetrahedron.html

See also: https://mathcurve.com/polyedres/tetraedre/tetraedre.shtml

The example below uses the following code in C#

```
var proc = BuiltIn.SetTetrahedron();
```

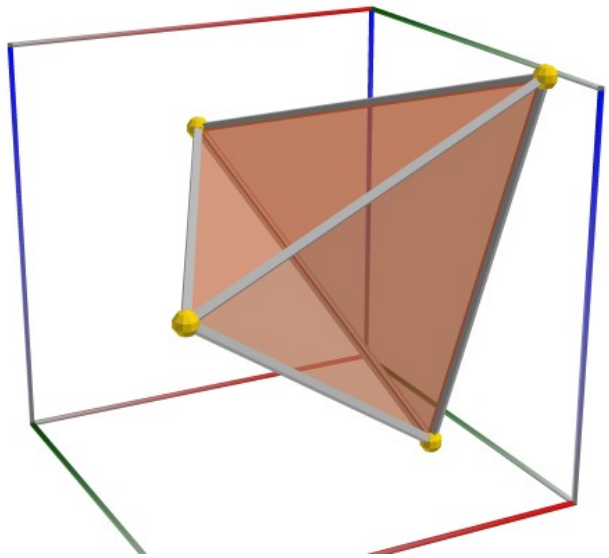

25.3.2 Cube

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D02a_Cube.3D.xml.

A cube is a three-dimensional solid object bounded by six square faces. It has twelve edges and eight vertices. It can be represented as a rectangular cuboid with six square faces, or a parallelepiped with equal edges.

See also: https://en.wikipedia.org/wiki/Cube

See also: https://mathworld.wolfram.com/Cube.html

See also: https://mathcurve.com/polyedres/cube/cube.shtml

The example below uses the following code in C#

```
var proc = BuiltIn.SetCube();
```

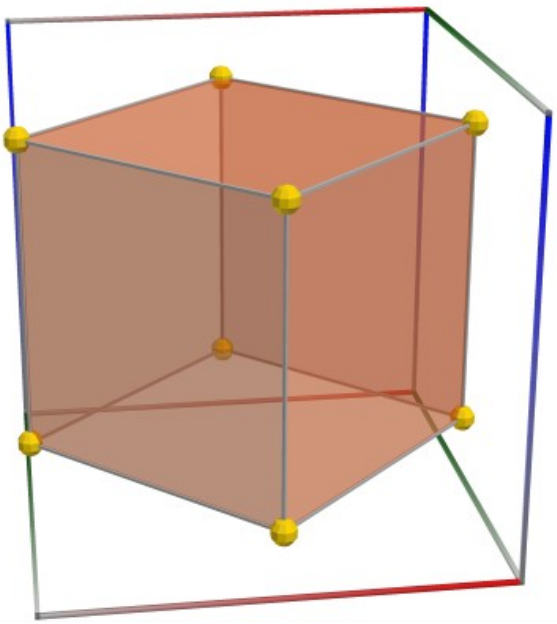

25.3.3 Octahedron

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D03a_Octahedron.3D.xml.

A regular octahedron is an octahedron that is a regular polyhedron. All the faces of a regular octahedron are equilateral triangles of the same size, and exactly four triangles meet at each vertex. A regular octahedron is convex, meaning that for any two points within it, the line segment connecting them lies entirely within it.

See also: https://en.wikipedia.org/wiki/Octahedron#Regular_octahedron

See also: https://mathworld.wolfram.com/RegularOctahedron.html

See also: https://mathcurve.com/polyedres/octaedre/octaedre.shtml

The example below uses the following code in C#

```
var proc = BuiltIn.SetOctahedron();
```

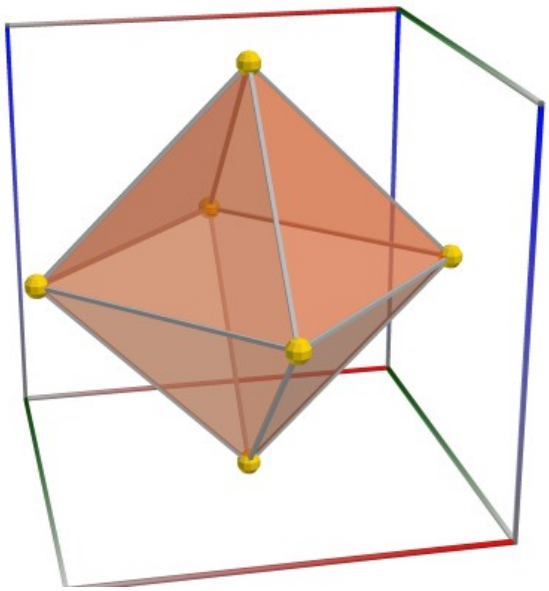

25.3.4 Dodecahedron

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D04a_Dodecahedron.3D.xml.

A regular dodecahedron or pentagonal dodecahedron is a dodecahedron composed of regular pentagonal faces, three meeting at each vertex.

See also: https://en.wikipedia.org/wiki/Regular_dodecahedron

See also: https://mathworld.wolfram.com/RegularDodecahedron.html

See also: https://mathcurve.com/polyedres/dodecaedre/dodecaedre.shtml

The example below uses the following code in C#

```
var proc = BuiltIn.SetDodecahedron();
```

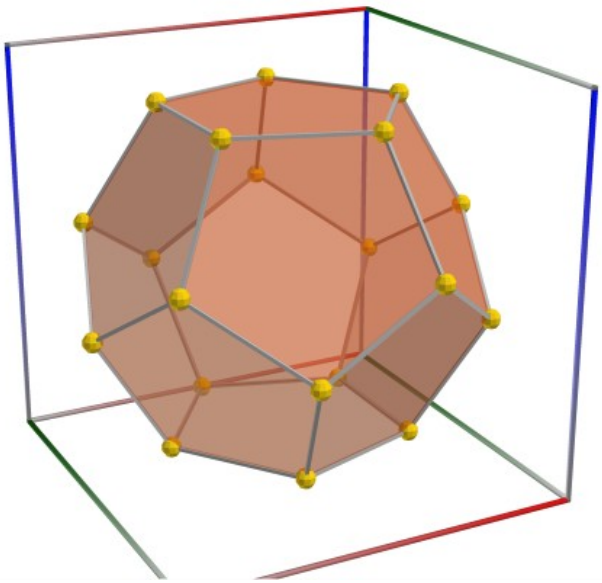

25.3.5 Icosahedron

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D05a_Icosahedron.3D.xml.

A regular icosahedron (or simply icosahedron) is a convex polyhedron that can be constructed from pentagonal antiprism by attaching two pentagonal pyramids with regular faces to each of its pentagonal faces, or by putting points onto the cube.

See also: https://en.wikipedia.org/wiki/Regular_icosahedron

See also: https://mathworld.wolfram.com/RegularIcosahedron.html

See also: https://mathcurve.com/polyedres/icosaedre/icosaedre.shtml

The example below uses the following code in C#

```
var proc = BuiltIn.SetIcosahedron();
```

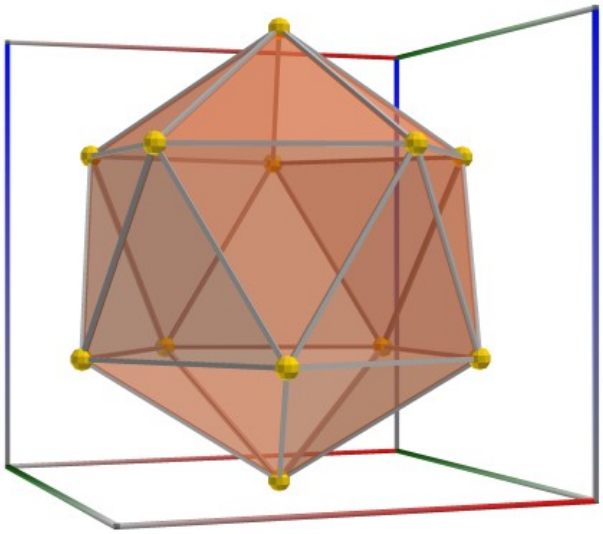

25.3.6 Geodesic sphere

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D06a_Geodesic_Sphere1.3D.xml (D06a-f).

A spherical polyhedron or spherical tiling is a tiling of the sphere in which the surface is divided or partitioned by great arcs into bounded regions called spherical polygons

See also: https://en.wikipedia.org/wiki/Geodesic_polyhedron

See also: https://en.wikipedia.org/wiki/Spherical_polyhedron

The example below uses the following code in C#

```
var radius = 1.0;
var numDiv = 1;
var proc = BuiltIn.SetGeodesicSphere(radius, numDiv);
```

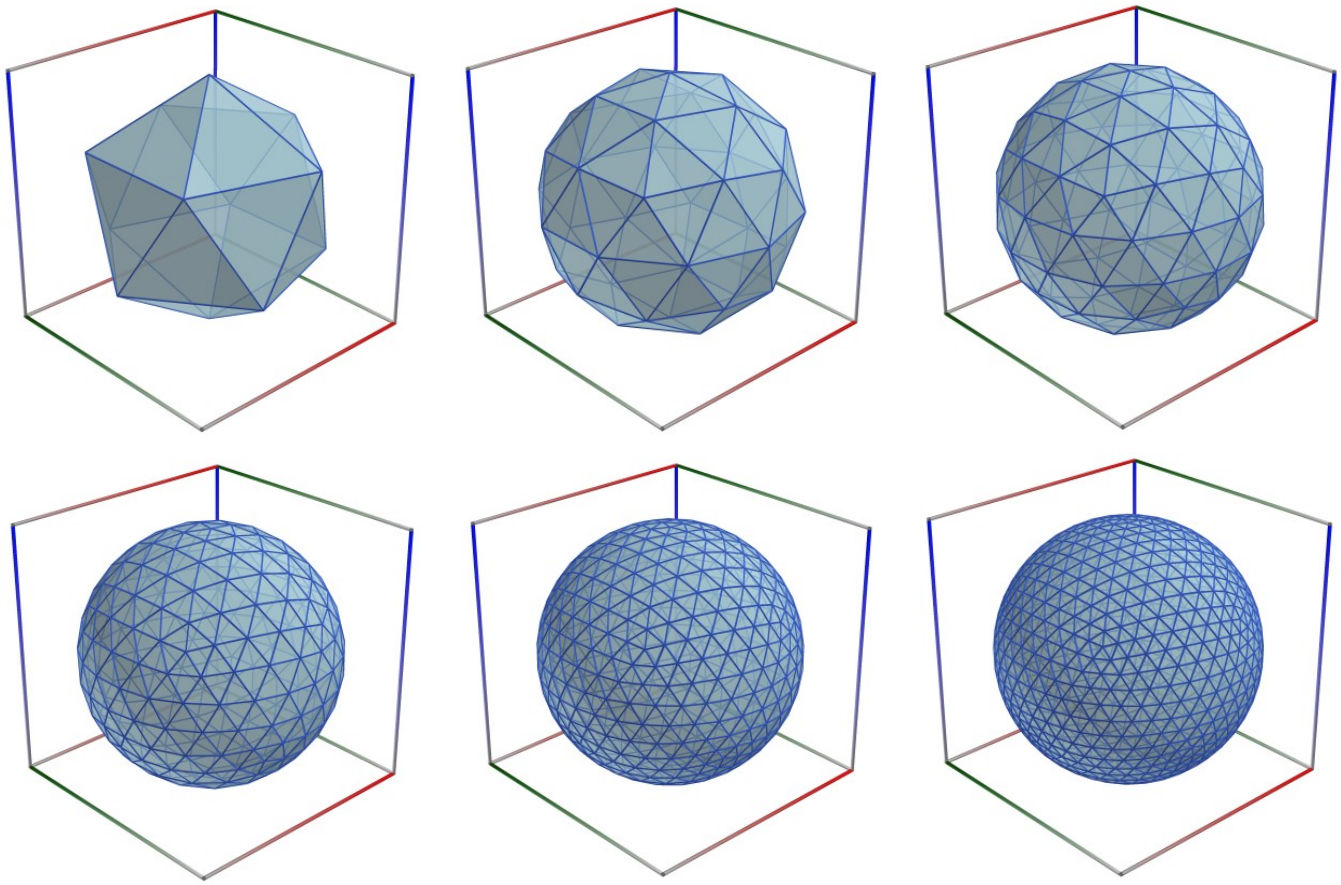

25.3.7 Augmented Octahedron

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07a_Augm_Octahedron_a.3D.xml (D07a-c).

Returns the augmented Octahedron.

The example below uses the following code in C#

```
var starRadius = 3.0;
var proc = BuiltIn.SetAugmentedOctahedron(starRadius );
```

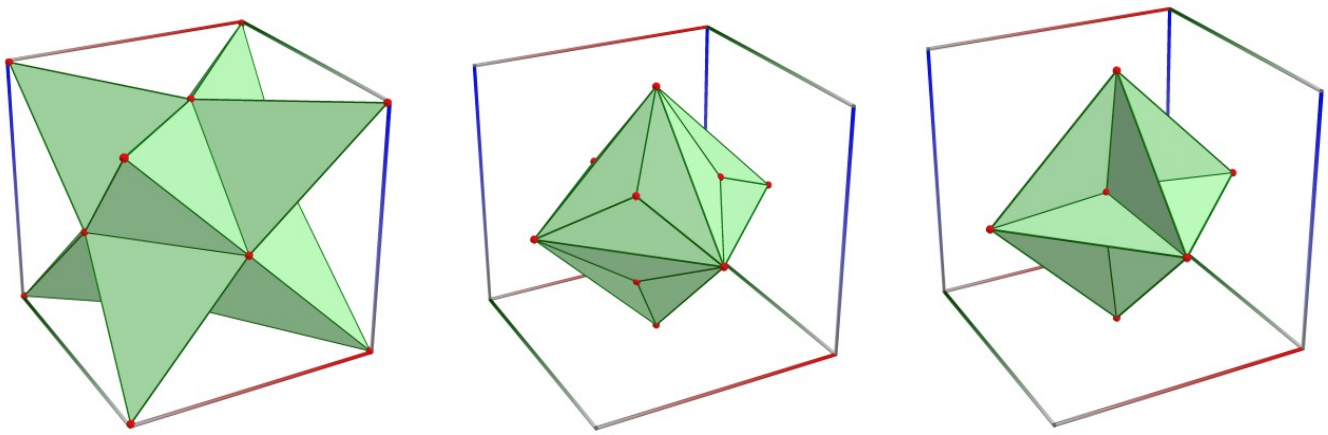

25.3.8 Augmented Dodecahedron

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D08a_Augm_Dodecahedron_a.3D.xml (D08a-c).

Returns the augmented Dodecahedron.

The example below uses the following code in C#

```
var starRadius = 6.0;
var proc = BuiltIn.SetAugmentedDodecahedron(starRadius );
```

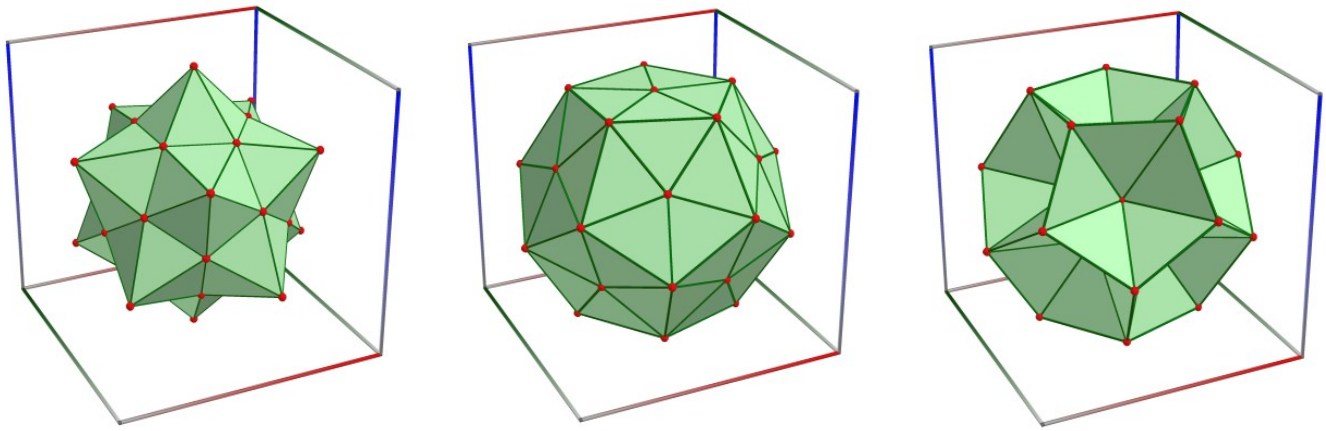

25.3.9 Augmented Icosahedron

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D09a_Augm_Icosahedron_a.3D.xml (D09a-c).

Returns the augmented Dodecahedron.

The example below uses the following code in C#

```
var starRadius = 2.0;
var proc = BuiltIn.SetAugmentedIcosahedron(starRadius );
```

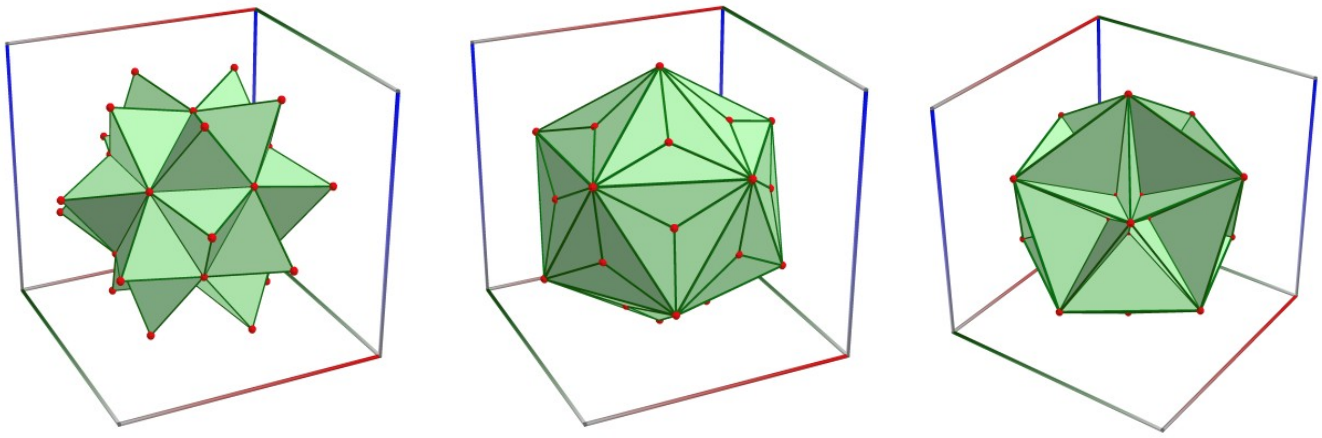

25.3.10 Augmented Geodesic Sphere

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D10a_Augm_Geodesic_a.3D.xml (D10a-c).

Returns augmented versions of the Geodesic.

See also: https://mathworld.wolfram.com/IcosahedronStellations.html

The example below uses the following code in C#

```
var starRadius = 2.0;
var numDiv = 2;
var proc = BuiltIn.SetAugmentedGeodesic(starRadius, numDiv);
```

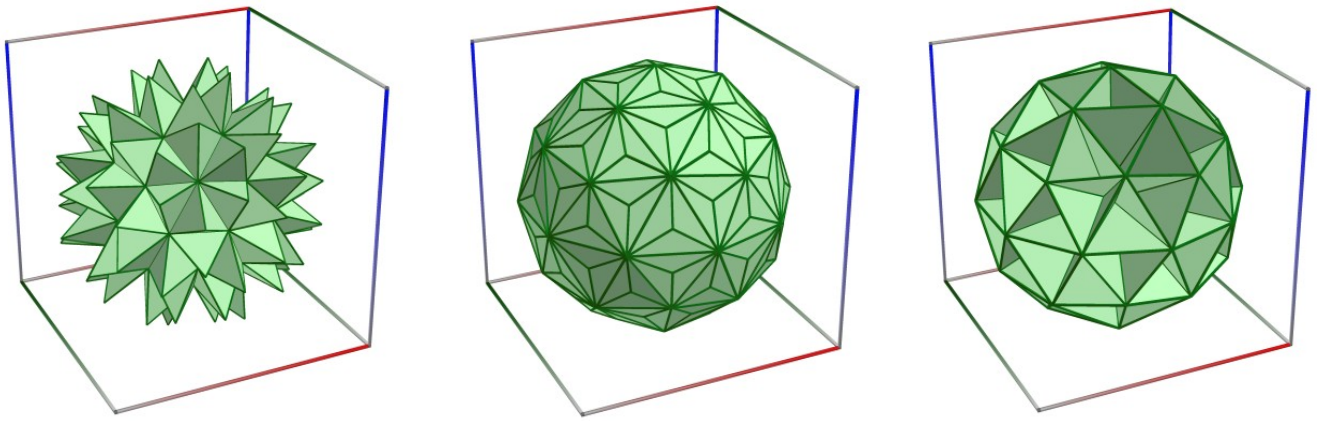

25.3.11 Stella Octangula

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D11a_StellaOctangula.3D.xml (D10a-c).

The stella octangula is a polyhedron compound composed of a tetrahedron and its dual (a second tetrahedron rotated 180 degrees with respect to the first). The stella octangula is also (incorrectly) called the augmented tetrahedron, and is the only stellation of the octahedron.

It can be constructed from a regular octahedron by augmentation with $h = \sqrt{6}/3$.

See also: https://mathworld.wolfram.com/StellaOctangula.html

See also: https://en.wikipedia.org/wiki/Stellated_octahedron

The example below uses the following code in C#

```
var starRadius = 2.0;
var proc = BuiltIn.SetAugmentedOctahedron(starRadius );
```

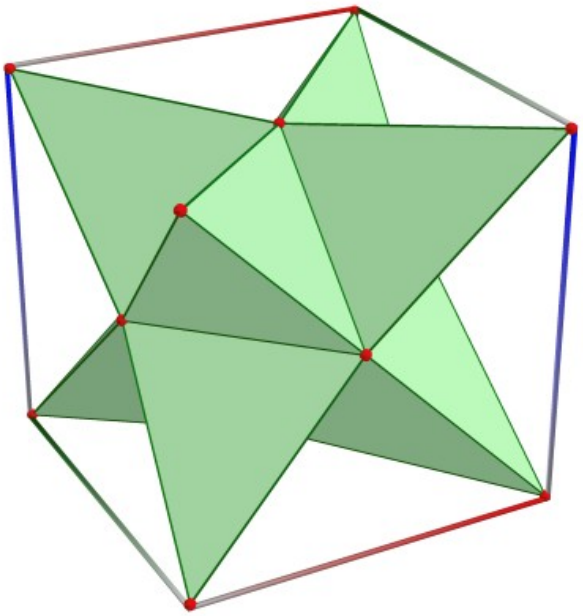

25.3.12 Small stellated Dodecahedron

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D12a_SmallStellatedDodecahedron.3D.xml (D10a-c).

The small stellated dodecahedron is the Kepler-Poinsot polyhedra whose dual polyhedron is the great dodecahedron.

It can be constructed from a regular dodecahedron by augmentation with $h = \sqrt{(5 + 2\sqrt{5})/5}$.

See also: https://mathworld.wolfram.com/SmallStellatedDodecahedron.html

See also: https://mathworld.wolfram.com/Augmentation.html

See also: https://en.wikipedia.org/wiki/Small_stellated_dodecahedron

See also: https://mathworld.wolfram.com/Kepler-PoinsotPolyhedron.html

The example below uses the following code in C#

```
var starRadius = 6.0;
var proc = BuiltIn.SetAugmentedDodecahedron(starRadius );
```

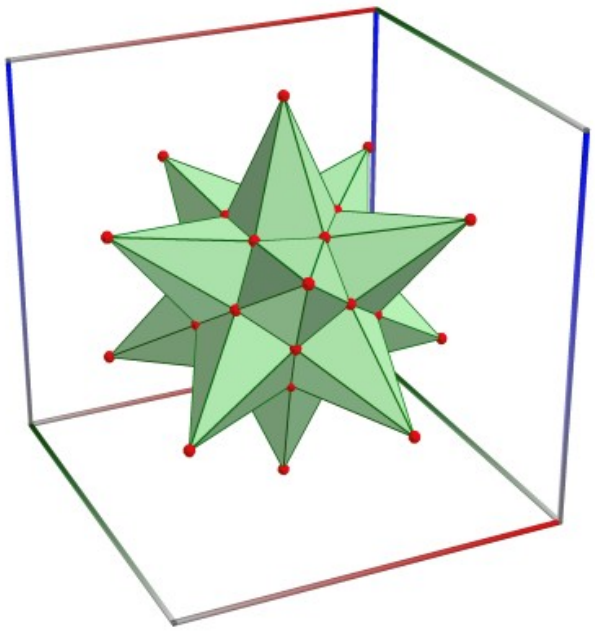

25.3.13 Great Dodecahedron

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D13a_GreatDodecahedron.3D.xml (D10a-c).

The great dodecahedron is the Kepler-Poinsot polyhedron whose dual is the small augmented dodecahedron.

It can be constructed from a regular icosahedron by augmentation with $h = (\sqrt{3}(\sqrt{5} - 3))/6$.

See also: https://mathworld.wolfram.com/GreatDodecahedron.html

See also: https://mathworld.wolfram.com/Augmentation.html

See also: https://en.wikipedia.org/wiki/Great_dodecahedron

See also: https://mathworld.wolfram.com/Kepler-PoinsotPolyhedron.html

The example below uses the following code in C#

```
var starRadius = 0.25;
var proc = BuiltIn.SetAugmentedIcosahedron(starRadius );
```

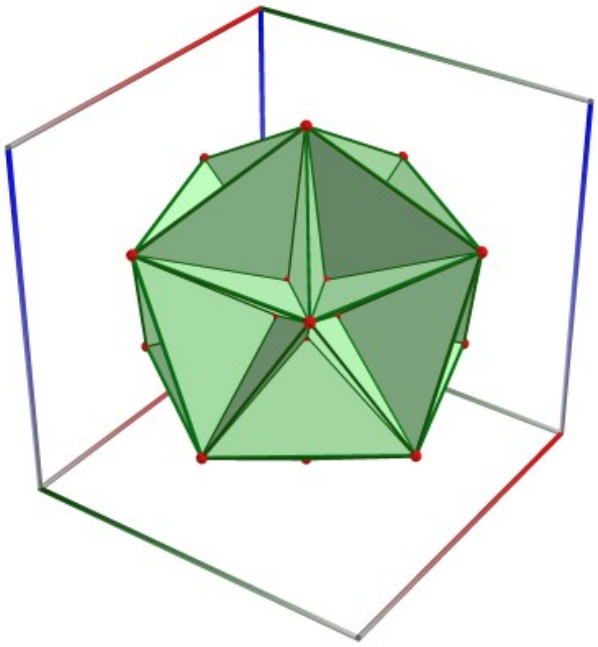

25.3.14 Great stellated Dodecahedron

The XML code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D14a_GreatStellatedDodecahedron.3D.xml (D10a-c).

The great augmented dodecahedron is one of the Kepler-Poinsot polyhedra.

It can be constructed from a regular icosahedron by augmentation with $h = (\sqrt{3}(3 + \sqrt{5}))/6$.

See also: https://mathworld.wolfram.com/GreatStellatedDodecahedron.html

See also: https://mathworld.wolfram.com/Augmentation.html

See also: https://en.wikipedia.org/wiki/Great_stellated_dodecahedron

See also: https://mathworld.wolfram.com/Kepler-PoinsotPolyhedron.html

The example below uses the following code in C#

```
var starRadius = 2.0;
var proc = BuiltIn.SetAugmentedIcosahedron(starRadius );
```

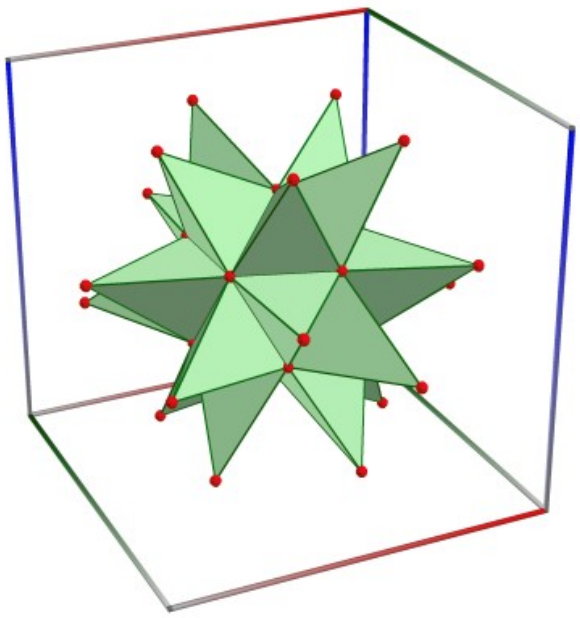

Part VI

Additional functions in double precision

CHAPTER

TWENTYSIX

REAL ELEMENTARY FUNCTIONS

26.1 Root, exponential, logarithmic and power functions

26.1.1 Auxiliary function $\mathrm{sqrt1pmx}(x) = \sqrt{1+x^2} - x$

`math53.sqrt1pmx`(x)

Returns $\sqrt{1+x^2} - x$, accurate also for x near 0.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.sqrt1pmx(-4.333)
8.779896558275222
>>> math53.sqrt1pmx(0.0)
1.0
>>> math53.sqrt1pmx(4.333)
0.1138965582752203
```

26.1.2 Bring radical

`math53.bring`(x)

Returns the Bring radical $b = \mathrm{BR}(x)$ of x, i.e. the unique real b with $b^5 + b + x = 0$. The function can be used (together with standard radicals) to solve a class of quintic equations in closed form.

See also: https://en.wikipedia.org/wiki/Bring_radical, Ehrhardt [295] (3.10.4).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.bring(-4.333)
1.252357338752218
>>> math53.bring(0.0)
0.0
>>> math53.bring(4.333)
-1.252357338752218
```

26.1.3 Auxiliary function $\mathrm{expmx2h}(x) = \exp(-x^2/2)$

`math53.expmx2h`(x)

Returns $\exp(-x^2/2)$ with damped error amplification.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.expmx2h(-4.333)
8.376925527113537e-05
>>> math53.expmx2h(0.0)
1.0
>>> math53.expmx2h(4.333)
8.376925527113537e-05
```

26.1.4 Relative error exponential $\mathrm{exprel}(x) = (\exp(x) - 1)/x$

`math53.exprel`(x)

where `ctx` is `math53`, `ctxcpp` or `ctxflint`.

Returns exprel(x) = $(\exp(x) - 1)/x$, 1 for $x = 0$.

$$\mathrm{exprel}(x) = \begin{cases} (\exp(x) - 1)/x = \mathrm{expm1}(x)/x, & \text{if } x \neq 0 \\ 1, & \text{if } x = 0. \end{cases}$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.exprel(-4.333)
0.22775718808161466
>>> math53.exprel(0.0)
1.0
>>> math53.exprel(4.333)
17.348825645093516
```

26.1.5 Auxiliary function $\mathrm{expx2}(x) = \exp(x \cdot |x|)$

math53.**expx2**(x)

Returns $\exp(x \cdot |x|)$ with damped error amplification.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.expx2(-4.333)
7.01728812868064e-09
>>> math53.expx2(0.0)
1.0
>>> math53.expx2(4.333)
142505193.1262249
```

26.1.6 Auxiliary function $\mathrm{logistic}(x) = 1/(1 + \exp(-x))$

math53.**logistic**(x)

Returns $\mathrm{logistic}(x) = 1/(1 + \exp(-x))$. See also Wikipedia [1342], MathWorld [1003].

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.logistic(-4.333)
0.012957990198853193
>>> math53.logistic(0.0)
0.5
>>> math53.logistic(4.333)
0.9870420098011469
```

26.1.7 Einstein functions

math53.**einstein**(n, x)

Returns the Einstein function E_n for $n = 1, 2, 3, 4$, with $E_1(x) = \dfrac{x^2 e^x}{(e^x - 1)^2}$, $E_2(x) = \dfrac{x}{e^x - 1}$, $E_3(x) = \log(1 - e^{-x}), x > 0$, $E_4(x) = \dfrac{x}{e^x - 1} - \log(1 - e^{-x}), x > 0$.

See also https://mathworld.wolfram.com/EinsteinFunctions.html

See also: Abramowitz and Stegun. [4] table 27.3, Ehrhardt [295] (3.10.7).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.einstein(1,4.333)
0.253079999702088
>>> math53.einstein(2,4.333)
0.05764078909184343
>>> math53.einstein(3,4.333)
```

(continues on next page)

(continued from previous page)

```
-0.013215039301928083
>>> math53.einstein(4,4.333)
0.07085582839377151
```

26.1.8 Auxiliary function $\mathrm{log1mexp}(x) = \log(1 - \exp(x))$

`math53.log1mexp`(x)

Returns $\log(1 - \exp(x)), x < 0$, calculated in an accurate and efficient way.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.log1mexp(-4.333)
-0.013215039301928083
>>> math53.log1mexp(0.0)
-inf
>>> math53.log1mexp(4.333)
nan
```

26.1.9 Auxiliary function $\mathrm{log1pexp}(x) = \log(1 + \exp(x))$

`math53.log1pexp`(x)

Returns $\mathrm{ln1pexp}(x)) = \log(1 + \exp(x)) = \mathrm{log1p}(\exp(x))$. See also *log1p()*.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.log1pexp(-4.333)
0.013042677332710145
>>> math53.log1pexp(0.0)
0.6931471805599453
>>> math53.log1pexp(4.333)
4.3460426773327105
```

26.1.10 Auxiliary function $\mathrm{log1pmx}(x) = \log(1 + x) - x$

`math53.log1pmx`(x)

Returns $\mathrm{ln1pmx}(x)) = \log(1 + x) - x = \mathrm{log1p}(x) - x$, accurate also for $-0.5 \leq x \leq 0.5$. See also *log1p()*.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.log1pmx(-4.333)
nan
>>> math53.log1pmx(0.0)
0.0
>>> math53.log1pmx(4.333)
-2.659086068381535
```

26.1.11 Auxiliary function $\mathrm{logaddexp}(x, y) = \log[\exp(x) + \exp(y)]$

`math53.logaddexp`(x, y)

Accurately compute ln[exp(x) + exp(y)].

See also: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/powers/logaddexp.html

See also: https://nhigham.com/2021/01/05/what-is-the-log-sum-exp-function/

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.logaddexp(1.2, -4.333)
1.203946312008691
>>> math53.logaddexp(3.7, 0)
3.724422845933779
>>> math53.logaddexp(4.8, 4.333)
5.2866641257129325
```

26.1.12 Auxiliary function $\mathrm{logsubexp}(x, y) = \log[\exp(x) - \exp(y)]$

`math53.logsubexp`(x, y)

Accurately compute $\log[\exp(x) - \exp(y)], x > y$.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.logsubexp(1.2, -4.333)
1.1960380528914856
>>> math53.logsubexp(3.7, 0)
3.6749657144139602
>>> math53.logsubexp(4.8, 4.333)
3.8141445624254304
```

26.1.13 Auxiliary function $\mathrm{logit}(x) = \log(x/(1.0 - x))$

`math53.logit`(x)

Returns $\mathrm{logit}(x) = \log(x/(1.0 - x))$, accurate also near $x = 0.5$. See also Wikipedia [1343], MathWorld [1004].

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.logit(-0.333)
nan
>>> math53.logit(0.0)
-inf
>>> math53.logit(0.333)
-0.6946475559351799
```

26.1.14 Wright ω function

`math53.wright_omega`(x)

Returns the Wright $\omega(x)$ function, which is defined as the unique solution of $\omega(x) + \log(\omega(x)) = x$. For real x it can be written in terms of the Lambert W function as $\omega(x) = W(e^x)$

See also: Ehrhardt [295] (3.10.26).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.wright_omega(-0.333)
0.4548304865283553
>>> math53.wright_omega(0.0)
0.5671432904097838
>>> math53.wright_omega(0.333)
0.695756104553223
```

26.1.15 Auxiliary function $\mathrm{compound}(x, n) = (1 + x)^n$

`ctx.compound_si`(*x*, *n*)

Returns $(1 + x)^n$, computed accurately also when x is very close to 0.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.compound_si(-4.333, 3)
-37.02592703700001
>>> math53.compound_si(0.0, 2)
1.0
>>> math53.compound_si(4.333, 3)
151.675261037
```

26.1.16 Auxiliary function $\mathrm{comprel}(x, n) = (1 + x)^n - 1$

`ctx.comprel`(*x*, *n*)

Returns $(1 + x)^n - 1$, computed accurately also when x is very close to 0.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.comprel(-4.333, 3)
8.775889000000001
>>> math53.comprel(0.0, 2)
2.0
>>> math53.comprel(4.333, 3)
34.773889000000004
```

26.1.17 Auxiliary function $\mathrm{hypot3}(x, y, z) = \sqrt{x^2 + y^2 + z^2}$

`math53.hypot3`(*x*, *y*, *z*)

Returns $\mathrm{hypot3}(x, y, z) = \sqrt{x^2 + y^2 + z^2}$ in a way which avoids undue underflow and overflow. See also BoostMath [122], Wikipedia [1281].

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.hypot3(1.2, -4.333, -1.333)
4.689539209773174
>>> math53.hypot3(2.4, 0, 0)
2.4
>>> math53.hypot3(4.8, -4.333, -1.333)
6.602406985334969
```

26.1.18 Fibonacci polynomials, $\mathrm{fibpoly}(n, x)$

`math53.fibpoly`(*n*, *x*)

where `ctx` is `math53`, `ctxcpp` or `ctxflint`.

Returns $F_n(x)$, the Fibonacci polynomial of index $n \in \mathbb{Z}$. See also Wikipedia [1336], Wikipedia [1337], Jin [381], MathWorld [997], MathWorld [998], Ehrhardt [295] (3.10.11).

https://en.wikipedia.org/wiki/Fibonacci_polynomials#Properties

https://functions.wolfram.com/HypergeometricFunctions/Fibonacci2General/26/03/01/0002/

For any non-negative integer n, the Fibonacci polynomials $\{F_n(x)\}$ are defined by the second order linear recursive formula $F_{n+2}(x) = xF_{n+1}(x) + F_n(x)$ with $F_0(x) = 0$, $F_1(x) = 1$, $L_0(x) = 2$, and $L_1(x) = x$. The general terms of $F_n(x)$ are

given by

$$F_n(x) = \frac{1}{\sqrt{x^2+4}}\left[\left(\frac{x+\sqrt{x^2+4}}{2}\right)^n - \left(\frac{x-\sqrt{x^2+4}}{2}\right)^n\right]$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.fibpoly(2, -4.333)
-4.333
>>> math53.fibpoly(3, -4.333)
19.774889
>>> math53.fibpoly(4, 4.333)
90.01759403700001
```

26.1.19 Lucas polynomials, $\mathrm{lucpoly}(n, x)$

`math53.lucpoly(`n, x`)`

where `ctx` is `math53`, `ctxcpp` or `ctxflint`.

Returns $L_n(x)$, the Lucas polynomial of index $n \in \mathbb{Z}$. See also Ehrhardt [295] (3.10.18), Wikipedia [1344], Wikipedia [1345], Jin [381], MathWorld [1005], MathWorld [1006].

For any non-negative integer n, Lucas polynomials $\{L_n(x)\}$ are defined by the second order linear recursive formulas $L_{n+2}(x) = xL_{n+1}(x) + L_n(x)$, $L_0(x) = 2$, and $L_1(x) = x$. For negative indices we have $L_{-n}(x) = (-1)^n L_n(x)$. The general terms of $L_n(x)$ are given by

$$L_n(x) = \left(\frac{x+\sqrt{x^2+4}}{2}\right)^n + \left(\frac{x-\sqrt{x^2+4}}{2}\right)^n.$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.lucpoly(2, -4.333)
20.774889
>>> math53.lucpoly(3, -4.333)
-94.35059403700001
>>> math53.lucpoly(4, 4.333)
429.5960129623211
```

26.1.20 Fibonacci function, $F_\nu(x)$, of real index ν

`math53.fibfun(`ν, x`)`

Returns $F_\nu(x) = \dfrac{2^{-\nu}(x+\sqrt{x^2+4})^\nu - \cos(\pi\nu)\cdot 2^\nu (x+\sqrt{x^2+4})^{-\nu}}{\sqrt{x^2+4}}$, the general Fibonacci function of real index ν.

See also Ehrhardt [295] (3.10.12) , https://en.wikipedia.org/wiki/Fibonacci_polynomials.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.fibfun(1.2, -4.333)
1.0790638603231733
>>> math53.fibfun(3.7, -4.333)
-33.57833497912526
>>> math53.fibfun(4.8, 4.333)
302.6505730178296
```

26.2 Trigonometric functions

26.2.1 Sine, x in degrees, $\mathrm{sind}(x)$

`math53.sind(`x`)`

Returns the sine of x, with x in degrees, $\mathrm{sind}(x)$. See also Wikipedia [1239], MathWorld [870], NIST [490].

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.sind(-4.333)
-0.07555305176474306
>>> math53.sind(0.0)
0.0
>>> math53.sind(4.333)
0.07555305176474306
```

26.2.2 Inverse sine, input in degrees, $\mathrm{asind}(x)$

`math53.asind(`x`)`

where `ctx` is `math53`, `mathc53`, `ctxcpp`, `ctxflint`.

Returns the inverse sine of x, $\mathrm{asin}(x)$. See also Wikipedia [1255], MathWorld [867], NIST [485], Ehrhardt [295] (4.2.13), Mpmath [575].

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.asind(-0.333)
-19.45096478286684
>>> math53.asind(0.0)
0.0
>>> math53.asind(0.333)
19.45096478286684
```

26.2.3 Cosine, x in degrees, $\mathrm{cosd}(x)$

`math53.cosd(`x`)`

Returns the cosine of x, with x in degrees, $\mathrm{cosd}(x)$. See also Wikipedia [1242], MathWorld [855], NIST [490].

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.cosd(-4.333)
0.99714178348369
>>> math53.cosd(0.0)
1.0
>>> math53.cosd(4.333)
0.99714178348369
```

26.2.4 Inverse cosine, input in degrees, $\mathrm{acosd}(x)$

`math53.acosd(`x`)`

where `ctx` is `math53`, `mathc53`, `ctxcpp`, `ctxflint`.

Returns the inverse cosine of x, $\mathrm{acos}(x)$. See also Wikipedia [1255], MathWorld [864], NIST [485], Ehrhardt [295] (4.2.3), Flint [739], Flint [729], Mpmath [566].

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.acosd(-0.333)
109.45096478286685
>>> math53.acosd(0.0)
90.0
>>> math53.acosd(0.333)
70.54903521713317
```

26.2.5 Tangent, with x in degrees, $\mathrm{tand}(x)$

`math53.tand`(x)

Returns the tangent of x, with x in degrees, $\mathrm{tand}tan(x)$. See also Wikipedia [1242], MathWorld [871], NIST [490].

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.tand(-4.333)
-0.07576961773759515
>>> math53.tand(0.0)
0.0
>>> math53.tand(4.333)
0.07576961773759515
```

26.2.6 Inverse tangent, input in degrees, $\mathrm{atand}(x)$

`math53.atand`(x)

where `ctx` is `math53`, `mathc53`, `ctxcpp` or `ctxflint`.

Returns the inverse tangent of x, $\mathrm{atan}(x)$. See also Wikipedia [1255], MathWorld [868], NIST [485], Ehrhardt [295] (4.2.15), Flint [739], Flint [729], Mpmath [576].

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.atand(-4.333)
-77.00441747834749
>>> math53.atand(0.0)
0.0
>>> math53.atand(4.333)
77.00441747834749
```

26.2.7 Cotangent, with x in degrees, $\mathrm{cotd}(x)$

`math53.cotd`(x)

Returns the cotangent of x, with x in degrees, $\mathrm{cotd}(x)$. See also Wikipedia [1242], MathWorld [856], NIST [490].

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.cotd(-4.333)
-13.197902138865127
>>> math53.cotd(0.0)
inf
>>> math53.cotd(4.333)
13.197902138865127
```

26.2.8 Inverse cotangent, input in degrees, $\mathrm{acotd}(x)$

math53.**acotd**(x)

Returns the inverse cotangent of x, $\mathrm{acot}(x)$. See also Wikipedia [1255], MathWorld [865], NIST [485], Ehrhardt [295] (4.2.5).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.acotd(-4.333)
-12.995582521652512
>>> math53.acotd(0.0)
90.0
>>> math53.acotd(4.333)
12.995582521652512
```

26.2.9 Auxiliary function, $\mathrm{acos}(1-x)$

math53.**acos1m**(x)

Returns $\mathrm{acos}(1-x)$, $0 \leq x \leq 2$, accurate also for x near 0.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.acos1m(-0.333)
nan
>>> math53.acos1m(0.0)
0.0
>>> math53.acos1m(0.333)
0.8406213674789956
```

26.2.10 Haversine function $\mathrm{hav}(x) = (1-\cos(x))/2$

math53.**hav**(x)

Returns the haversine function $\mathrm{hav}(x) = (1-\cos(x))/2 = \sin^2(x/2)$. See also MathWorld [978], Wikipedia [1339].

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.hav(-4.333)
0.6851764839496324
>>> math53.hav(0.0)
0.0
>>> math53.hav(4.333)
0.6851764839496324
```

26.2.11 Inverse haversine function $\mathrm{archav}(x) = \mathrm{acos}(1-2x)$

math53.**archav**(z)

Returns the inverse haversine function $\mathrm{archav}(x) = \mathrm{acos}(1-2x) = 2\mathrm{asin}(\sqrt{x})$, $0 \leq x \leq 1$. See also MathWorld [982], Wikipedia [1341].

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.archav(-0.333)
nan
>>> math53.archav(0.0)
0.0
>>> math53.archav(0.333)
1.2302522220901777
```

26.2.12 Versine function $\mathrm{vers}(x) = 1 - \cos(x)$

`math53.vers`(x)

Returns the versine function $\mathrm{vers}(x) = 1 - \cos(x)$.

See also: https://en.wikipedia.org/wiki/Versine#Haversine

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.vers(-4.333)
1.3703529678992648
>>> math53.vers(0.0)
0.0
>>> math53.vers(4.333)
1.3703529678992648
```

26.2.13 Coversine, $\mathrm{covers}(x) = 1 - \sin(x)$

`math53.covers`(x)

Returns the $\mathrm{covers}(x) = 1 - \sin(x)$.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.covers(-4.333)
0.07110889811119075
>>> math53.covers(0.0)
1.0
>>> math53.covers(4.333)
1.928891101888809
```

26.2.14 Versint function $\mathrm{versint}(x) = x - \sin(x)$

`math53.versint`(x)

Returns $\mathrm{versint}(x) = \int_0^x \mathrm{vers}(t)\mathrm{d}t = x - \sin(x)$, accurate also near 0.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.versint(-4.333)
-5.26189110188881
>>> math53.versint(0.0)
0.0
>>> math53.versint(4.333)
5.26189110188881
```

26.2.15 Integral of cos powers, $\mathrm{cosint}(n, x)$

`math53.cosint`(n, x)

Returns $\mathrm{IC}_n(x) = \int_0^x \cos^n(t)\,\mathrm{d}t$, the integral of the nth cos power, for $n \geq 0$.

See also Ehrhardt [295] (3.10.13).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.cosint(2, 4.333)
2.33850878821987
>>> math53.cosint(3, 0.0)
0.0
>>> math53.cosint(4, -4.333)
-1.7656780674583596
```

26.2.16 Integral of sin powers, $\mathrm{sinint}(n, x)$

`math53.sinint`(*n*, *x*)

Returns sinint(n,x) = integral(sin(t)^n, t=0..x), n >= 0

Returns $\mathrm{IS}_n(x) = \int_0^x \sin^n(t)\,\mathrm{d}t$, the integral of the nth sin power, for $n \geq 0$.

See also Ehrhardt [295] (3.10.14).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.sinint(2, 4.333)
1.9944912117801308
>>> math53.sinint(3, 0.0)
0.0
>>> math53.sinint(4, -4.333)
-1.421660491018621
```

26.3 Hyperbolic functions

26.3.1 Cardinal hyperbolic sine, $\mathrm{sinhc}(x) = \sinh(x)/x$

math53.**sinhc**(x)

Returns $\mathrm{sinhc}(x) = \sinh(x)/x$, accurate also for x near 0.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.sinhc(-4.333)
8.788291416587565
>>> math53.sinhc(0.0)
1.0
>>> math53.sinhc(4.333)
8.788291416587565
```

26.3.2 Auxiliary function, $\mathrm{sinhmx}(x) = \sinh(x) - x$

math53.**sinhmx**(x)

Returns sinh(x)-x, accurate also for x near 0.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.sinhmx(-4.333)
-33.746666708073924
>>> math53.sinhmx(0.0)
0.0
>>> math53.sinhmx(4.333)
33.746666708073924
```

26.3.3 Auxiliary function, $\mathrm{coshm1}(x) = \cosh(x) - 1$

math53.**coshm1**(x)

Returns $\cosh(x) - 1$, accurate also for x near 0.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.coshm1(-4.333)
37.09279481211629
>>> math53.coshm1(0.0)
0.0
>>> math53.coshm1(4.333)
37.09279481211629
```

26.3.4 Auxiliary function $\mathrm{acosh}(1 + x)$

math53.**acosh1p**(z)

Returns $\mathrm{acosh}(1 + x), x \geq 0$, accurate also for x near 0.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.acosh1p(-4.333)
nan
>>> math53.acosh1p(0.0)
0.0
```

(continues on next page)

(continued from previous page)

```
>>> math53.acosh1p(4.333)
2.3581527329799776
```

26.3.5 Auxiliary function $\log(\cosh(x))$

`math53.logcosh`(x)

Returns ln(cosh(x)), accurate for x ~ 0 and without overflow for large x

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.logcosh(-4.333)
3.640025151705744
>>> math53.logcosh(0.0)
0.0
>>> math53.logcosh(4.333)
3.640025151705744
```

26.3.6 Auxiliary function $\log(\sinh(x))$

`math53.logsinh`(x)

Returns ln(sinh(x)), x > 0, accurate for x ~ 0 and without overflow for large x

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.logsinh(-4.333)
nan
>>> math53.logsinh(0.0)
-inf
>>> math53.logsinh(4.333)
3.639680457470837
```

26.3.7 Gudermannian function $\mathrm{gd}(x) = \mathrm{asin}(\tanh(x))$

`math53.gd`(x)

Returns the Gudermannian function $\mathrm{gd}(x) = \mathrm{asin}(\tanh(x))$. See also Wikipedia [1338], MathWorld [977].

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.gd(-4.333)
-1.5445416269481194
>>> math53.gd(0.0)
0.0
>>> math53.gd(4.333)
1.5445416269481194
```

26.3.8 Inverse Gudermannian function $\mathrm{arcgd}(x) = \mathrm{atanh}(\sin(x))$

`math53.arcgd`(z)

Returns the inverse Gudermannian function $\mathrm{arcgd}(x) = \mathrm{atanh}(\sin(x)), |x| < \pi/2$.

See also Wikipedia [1340], MathWorld [981].

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.arcgd(-0.733)
-0.8091157114590968
>>> math53.arcgd(0.0)
0.0
>>> math53.arcgd(0.733)
0.8091157114590968
```

26.3.9 Langevin function, $L(x)$

`math53.langevinl(x)`

Returns the Langevin function $L(x)$, defined as $L(x) = \coth(x) - 1/x$ for $x \neq 0$, and $L(0) = 0$ for $x = 0$.

See also Ehrhardt [295] (3.10.16).

https://en.wikipedia.org/wiki/Brillouin_and_Langevin_functions

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.langevinl(-0.733)
-0.23600650435321588
>>> math53.langevinl(0.0)
0.0
>>> math53.langevinl(0.733)
0.23600650435321588
```

26.3.10 Inverse Langevin function, $L^{-1}(x)$

`math53.langevinlinv(x)`

Returns the functional inverse L^{-1} of the Langevin function, i.e. $L(L^{-1}(x)) = x$, $|x| < 1$.

See also Ehrhardt [295] (3.10.17).

https://en.wikipedia.org/wiki/Brillouin_and_Langevin_functions

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.langevinlinv(-0.733)
-3.7292029668920454
>>> math53.langevinlinv(0.0)
0.0
>>> math53.langevinlinv(0.733)
3.7292029668920454
```

26.3.11 Solutions of Kepler's equation, $\mathrm{kepler}(M, e)$

`math53.kepler(M, e)`

Returns the solutions (eccentric anomaly x) of Kepler's equation from the mean anomaly M and the eccentricity e, more precisely the solutions x of

$$M = \begin{cases} x - e\sin(x), & e < 1, \\ x + x^3/3, & e = 1 \text{ (Barker's equation)}, \\ e\sinh(x) - x, & e > 1. \end{cases}$$

See also Ehrhardt [295] (3.10.23).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.kepler(1.2, 0.333)
1.5327591321519451
>>> math53.kepler(2.4, 0.333)
2.577919997073644
>>> math53.kepler(4.8, 4.333)
1.1179306170995853
```

26.4 Gamma functions

26.4.1 Sign of the gamma function

math53.**signgamma**(x)

Returns the sign of $\Gamma(x)$, which is $+1$ if $x > 0$ or if $\lfloor x \rfloor$ is even, -1 otherwise, and meaningless for 0 or negative integers.

See also Wikipedia [1253], MathWorld [880], NIST [22], BoostMath [101], Ehrhardt [295] (3.5.1.9).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.signgamma(-4.333)
-1.0
>>> math53.signgamma(0.0)
1.0
>>> math53.signgamma(4.333)
1.0
```

26.4.2 Logarithm and sign of the gamma function

math53.**lgamma_s**(x, s)

Returns (as a tuple) the logarithm and sign of the gamma function.

See also Wikipedia [1253], MathWorld [880], NIST [22], BoostMath [101], Ehrhardt [295] (3.5.1.10).

An example in Python

```
>>> from xlcalcnet import math53
>>> print(math53.lgamma_s(-4.333))
(-2.40239615347222, -1)
>>> print(math53.lgamma_s(0.0))
(NaN, 1)
>>> print(math53.lgamma_s(4.333))
(2.22531226395457, 1)
```

26.4.3 Logarithm of $\Gamma(1 + x)$

math53.**lgamma1p**(x)

Returns $\log|\Gamma(1 + x)|$ with increased accuracy for x near 0.

See also Wikipedia [1264], MathWorld [888], BoostMath [102], Ehrhardt [295] (3.5.1.7).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.lgamma1p(-4.333)
-0.9361360107144484
>>> math53.lgamma1p(0.0)
0.0
>>> math53.lgamma1p(4.333)
3.691572406712339
```

26.4.4 Logarithm of factorials: $\log(x!)$

math53.**logfactorial**(n)

Returns $\log(x!) = \log(\Gamma(x + 1))$. See also Wikipedia [1251], MathWorld [878], BoostMath [99], Ehrhardt [295] (3.5.4.3).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.logfactorial(2)
0.6931471805599453
>>> math53.logfactorial(5)
4.787491742782046
>>> math53.logfactorial(15)
27.89927138384089
```

26.4.5 Logarithm of the binomial coefficient

`math53.logbinomial`(n, k)

Returns the logarithm of the binomial coefficient, $\log \binom{n}{k} = \log\left(\frac{n!}{k!(n-k)!}\right)$, for $n \geq k \geq 0$.

See also Wikipedia [1248], MathWorld [877], NIST [482], BoostMath [96], Ehrhardt [295] (3.5.4.5).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.logbinomial(13, 3)
5.655991810819852
>>> math53.logbinomial(24, 8)
13.508266389286396
>>> math53.logbinomial(37, 12)
21.33979273614502
```

26.4.6 Log-Beta function

`math53.logbeta`(a, b)

where `ctx` is `math53`, `ctxcpp`, `ctxboost` or `ctxflint`.

Returns the logarithm of $B(a, b)$

See also Wikipedia [1247], MathWorld [876], NIST [21], BoostMath [95], Ehrhardt [295] (3.5.3.2), Mpmath [583].

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.logbeta(1.2, -4.333)
-2.573142285269107
>>> math53.logbeta(3.7, 0.1)
2.134462769230688
>>> math53.logbeta(4.8, 4.333)
-5.783706647804463
```

26.4.7 Inverse of the gamma function, $\Gamma^{-1}(y)$

`math53.gamma_inv`(y)

Returns $\Gamma^{-1}(y)$, the functional inverse of the gamma function, i.e. it returns x with $\Gamma(x) = y$, $y \geq 0.8857421875$.

See also Wikipedia [1253], MathWorld [880], NIST [22], BoostMath [101], Ehrhardt [295] (3.5.1.3).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.gamma_inv(0.9)
1.6492265028621345
>>> math53.gamma_inv(1.5)
2.662766345320147
>>> math53.gamma_inv(4.333)
3.7325782628811806
```

26.4.8 Inverse of the logarithm of the gamma function, $\log \Gamma^{-1}(y)$

`math53.lgamma_inv`(y)

Returns the functional inverse of $\log \Gamma(x)$, i.e. it returns $x = \log \Gamma^{-1}(y)$ with $\log \Gamma(x) = y$ for $y \geq -0.12142 > y_m$ (the minimum of $\log \Gamma(x)$ for positive arguments). The result is greater than $x_m = 1.46163\ldots$ (the positive zero of the ψ function).

See also Wikipedia [1264], MathWorld [888], BoostMath [102], Ehrhardt [295] (3.5.1.6).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.lgamma_inv(0.9)
3.214573262668465
>>> math53.lgamma_inv(1.5)
3.7611332794709584
>>> math53.lgamma_inv(4.333)
5.729662140740046
```

26.4.9 Temme's regulated gamma function, $\Gamma^*(x)$

`math53.gammastar`(x)

Returns Temme's $\Gamma^*(x)$, defined by $\Gamma(x) = \sqrt{2\pi} e^{-x} x^{x-1/2} \Gamma^*(x)$.

See also Wikipedia [1253], MathWorld [880], NIST [22], BoostMath [101], Ehrhardt [295] (3.5.1.4).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.gammastar(0.9)
1.093716919051002
>>> math53.gammastar(1.5)
1.05634424426856
>>> math53.gammastar(4.333)
1.0193840818217619
```

26.4.10 Relative Pochhammer symbol, $((a)_x - 1)/x$

`math53.poch1`(a, x)

Returns $\dfrac{(a)_x - 1}{x}$, accurate also for small $|x|$. For $x = 0$ the value $\psi(a)$ is returned.

See also Ehrhardt [295] (3.5.4.7).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.poch1(1.2, -4.333)
-0.04297013038959621
>>> math53.poch1(2.4, 0)
0.6529011697005977
>>> math53.poch1(4.8, 4.333)
693.9682866581799
```

26.4.11 Catalan function $C(x)$

`math53.catalan_c`(x)

where `ctx` is `math53`, `ctxcpp`, `ctxboost` or `ctxflint`.

Returns the Catalan function $C(x) = \dfrac{1}{x+1}\binom{2x}{x} = \dfrac{\Gamma(2x+1)}{(x+1)\Gamma(x+1)^2}$.

See also: MathWorld [966], Wikipedia [1332], Ehrhardt [295] (3.10.5).

```
>>> from xlcalcnet import math53
>>> math53.catalan_c(0.9)
0.9539132521406414
>>> math53.catalan_c(1.5)
1.3581221810508415
>>> math53.catalan_c(4.333)
20.057821670219337
```

26.4.12 Bessel Lambda function, $\Lambda(\nu, x)$

math53.**bessel_lambda**(ν, x)

Returns the Bessel $\Lambda_\nu(x)$ function, defined for $x, \nu \geq 0$ as

$$\Lambda(\nu, x) = \Gamma(\nu + 1)\frac{J_\nu(x)}{(x/2)^\nu}$$

See also: Ehrhardt [295] (3.1.3.3).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.bessel_lambda(1.2, 1.333)
0.8116122406406188
>>> math53.bessel_lambda(2.4, 0)
1.0
>>> math53.bessel_lambda(4.8, 4.333)
0.4208160109325211
```

CHAPTER

TWENTYSEVEN

REAL ELLIPTIC FUNCTIONS

27.1 Conversions of parameters of elliptic functions

27.1.1 Elliptic nome $q(k)$ (DAMath)

`math53.elliptic_nome(`z`)`

Returns the elliptic nome $q(k)$ as a function of the modulus $|k| < 1$:. See also Wikipedia [1353], MathWorld [995], Ehrhardt [295] (3.2.8).

$$q(k) = \exp\left(-\pi \frac{K'(k)}{K(k)}\right)$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.elliptic_nome(-0.9333)
0.12535593275727377
>>> math53.elliptic_nome(0.0)
0.0
>>> math53.elliptic_nome(0.9333)
0.12535593275727377
```

27.1.2 Elliptic modulus $k(q)$ (DAMath)

`math53.elliptic_modulus(`q`)`

Returns the elliptic modulus k. as a function of the nome $|q|$ le 1. See also MathWorld [994], Ehrhardt [295] (3.2.9).The modulus k is often used as argument of elliptic integrals and Jacobi elliptic functions, the nome q is used with Jacobi theta functions. $k(q)$ is explicitly given by

$$k(q) = \frac{\theta_2^2(q)}{\theta_3^2(q)}.$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.elliptic_modulus(0.0)
0.0
>>> math53.elliptic_modulus(0.01)
0.3845443947629648
>>> math53.elliptic_modulus(0.6333)
0.9999999966889508
```

27.1.3 Jacobi amplitude, $\mathrm{am}(x, k)$ (DAMath)

math53.**jacobi_amplitude**(x, k)

Returns the Jacobi amplitude function $\mathrm{am}(x, k)$ for a given modulus k. This is the inverse function of Legendre's elliptic function of the first kind: $\mathrm{am}(F(x, k), k) = x$. When $|k| < 1, \mathrm{am}(x, k)$ is a monotone quasi-periodic function NIST [475], 22.16.2: $\mathrm{am}(x + 2K(k), k) = \mathrm{am}(x, k) + \pi$, with the special case $\mathrm{am}(x, 0) = x$. When $|k| > 1, \mathrm{am}(x, k)$ is periodic with period $4K(1/k)/k$, and if $|k| = 1$, then it is equal to the Gudermannian function $\mathrm{am}(x, \pm 1) = \mathrm{gd}(x)$.

See also MathWorld [1000], NIST [475], Ehrhardt [295] (3.2.10).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.jacobi_amplitude(1.2, -4.333)
-0.21310912002774368
>>> math53.jacobi_amplitude(2.4, 0.0)
2.4
>>> math53.jacobi_amplitude(3.7, 4.333)
-0.024983643980939094
```

27.2 Elliptic integrals

27.2.1 Legendre complete elliptic integral $B(k)$

`math53.elliptic_b(`*k*`)`

Returns the Legendre complete elliptic integral $B(k) = \int_0^{\pi/2} \frac{\cos^2(t)\mathrm{d}t}{\sqrt{1-k^2\sin^2(t)}} = \frac{E(k)-\sqrt{1-k^2}K(k)}{k^2}$. See also Wikipedia [1295], MathWorld [947], NIST [171], BoostMath [137], Ehrhardt [295] (3.2.1.4).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.elliptic_b(-0.9333)
0.9305395801783577
>>> math53.elliptic_b(0.0)
0.7853981633974483
>>> math53.elliptic_b(0.9333)
0.9305395801783577
```

27.2.2 Legendre complete elliptic integral $D(k)$

`math53.elliptic_d(`*k*`)`

Returns the Legendre complete elliptic integral $D(k) = \int_0^{\pi/2} \frac{\sin^2(t)\mathrm{d}t}{\sqrt{1-k^2\sin^2(t)}} = \frac{K(k)-E(k)}{k^2}$. See also Wikipedia [1295], MathWorld [947], NIST [171], BoostMath [137], Ehrhardt [295] (3.2.1.5).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.elliptic_d(-0.9333)
1.5285669226805516
>>> math53.elliptic_d(0.0)
0.7853981633974483
>>> math53.elliptic_d(0.9333)
1.5285669226805516
```

27.2.3 Legendre incomplete elliptic integral $B(\phi, k)$

`math53.elliptic_b_inc(`*phi*, *k*`)`

Returns the Legendre complete elliptic integral , $B(k) = \int_0^{\phi} \frac{\cos^2(t)\mathrm{d}t}{\sqrt{1-k^2\sin^2(t)}} = \frac{E(\phi,k)-\sqrt{1-k^2}F(\phi,k)}{k^2}$. See also Wikipedia [1295], MathWorld [947], NIST [171], BoostMath [137], Ehrhardt [295] (3.2.1.9).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.elliptic_b_inc(0.4, -0.9333)
0.3880334013629784
>>> math53.elliptic_b_inc(0.7, 0.0)
0.5963624324971151
>>> math53.elliptic_b_inc(1.2, 0.9333)
0.8930544029455502
```

27.2.4 Legendre incomplete elliptic integral $D(\phi, k)$

math53.**elliptic_d_inc**(*phi*, *k*)

Returns the Legendre complete elliptic integral , $D(k) = \int_0^{\phi} \frac{\sin^2(t)\mathrm{d}t}{\sqrt{1-k^2\sin^2(t)}} = \frac{F(\phi,k)-E(\phi,k)}{k^2}$. See also Wikipedia [1295], MathWorld [947], NIST [171], BoostMath [134], Ehrhardt [295] (3.2.1.10).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.elliptic_d_inc(0.4, -0.9333)
0.021551828843784506
>>> math53.elliptic_d_inc(0.7, 0.0)
0.10363756750288494
>>> math53.elliptic_d_inc(1.2, 0.9333)
0.6473333304003238
```

27.2.5 Heuman's Lambda function, $\Lambda_0(\phi, k)$

math53.**heuman_lambda**(*phi*, *k*)

Returns Heuman's Lambda function $\Lambda_0(\phi, k)$. See also MathWorld [953], BoostMath [141], Ehrhardt [295] (3.2.6).

$$\Lambda_0(\phi,k) = \frac{F(\phi,\sqrt{1-k^2})}{K(\sqrt{1-k^2})} + \frac{2}{\pi}K(k)Z(\phi,\sqrt{1-k^2}), \quad |k| \le 1.$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.heuman_lambda(0.4, -0.9333)
0.28392272091599396
>>> math53.heuman_lambda(0.7, 0.0)
0.644217687237691
>>> math53.heuman_lambda(1.2, 0.9333)
0.7921071008822748
```

27.2.6 Jacobi Zeta function, $Z(\phi, k)$

math53.**jacobi_zeta**(*phi*, *k*)

Returns the Jacobi Zeta function $Z(\phi, k)$. See also MathWorld [961], BoostMath [152], Ehrhardt [295] (3.2.7).

$$Z(\phi,k) = E(\phi,k) - \frac{E(k)}{K(k)}F(\phi,k), \quad |k| \le 1.$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.jacobi_zeta(0.4, -0.9333)
0.2029927800760033
>>> math53.jacobi_zeta(0.7, 0.0)
0.0
>>> math53.jacobi_zeta(1.2, 0.9333)
0.2701672377293978
```

27.3 Bulirsch elliptic integrals

See Carlson (1994)

Bulirsch elliptic integrals can be calculated by

$$\mathrm{cel1}(k_c) = \mathrm{cel}(k_c, 0, a, 0) = aR_F\left(0, k_c^2, 1\right)$$

$$\mathrm{cel2}(k_c) = \mathrm{cel}(k_c, 0, a, b) = aR_F\left(0, k_c^2, 1\right) + \frac{b}{3}R_J\left(0, k_c^2, 1, 0\right)$$

$$\mathrm{cel}(k_c, p, a, b) = aR_F\left(0, k_c^2, 1\right) + \frac{1}{3}(b - pa)R_J\left(0, k_c^2, 1, p\right)$$

$$\mathrm{el1}(x, k_c) = xR_F\left(1, 1 + k_c^2x^2, 1 + x^2\right)$$

$$\mathrm{el2}(x, k_c, a, b) = axR_F\left(1, 1 + k_c^2x^2, 1 + x^2\right) + (b - a)\frac{x^3}{3}R_D\left(1, 1 + k_c^2x^2, 1 + x^2\right)$$

$$\mathrm{el3}(x, k_c, p) = xR_F\left(1, 1 + k_c^2x^2, 1 + x^2\right) + (1 - p)\frac{x^3}{3}R_J\left(1, 1 + k_c^2x^2, 1 + x^2, 1 + px^2\right)$$

27.3.1 Complete elliptic integral of the 1st kind $\mathrm{cel1}(k_c)$

`math53.cel1`(*kc*)

Returns Bulirsch's complete elliptic integral of the first kind. See also Bulirsch [162], See also Bulirsch [163], NIST [173], Wikipedia [1292], Ehrhardt [295] (3.2.3.1).

$$\mathrm{cel1}(k_c) = \int_0^\infty \frac{\mathrm{d}t}{\sqrt{(1 + t^2)(1 + k_c^2t^2)}}$$

with the complementary modulus $K_c \neq 0$.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.cel1(-0.9333)
1.6254736111454573
>>> math53.cel1(0.01)
5.991589340506996
>>> math53.cel1(0.9333)
1.6254736111454573
```

27.3.2 Complete elliptic integral of the 2nd kind $\mathrm{cel2}(k_c, a, b)$

`math53.cel2`(*kc*, *a*, *b*)

Returns Bulirsch's complete elliptic integral of the second kind. See also Bulirsch [162], See also Bulirsch [163], NIST [173], Wikipedia [1292], Ehrhardt [295] (3.2.3.2).

$$\mathrm{cel2}(k_c, a, b) = \int_0^\infty \frac{a + bt^2}{(1 + t^2)\sqrt{(1 + t^2)(1 + k_c^2t^2)}}\mathrm{d}t$$

with the complementary modulus $k_c \neq 0$.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.cel2(1.2, -4.333, -1.333)
-4.151578844884948
>>> math53.cel2(3.7, -4.333, 0.0)
-2.078160086136537
>>> math53.cel2(4.8, 4.333, 1.333)
2.082811909491336
```

27.3.3 General complete elliptic integral $\mathrm{cel}(k_c, p, a, b)$

`math53.cel`(*kc*, *p*, *a*, *b*)

Returns Bulirsch's general complete elliptic integral. See also Bulirsch [162], See also Bulirsch [163], NIST [173], Wikipedia [1292], Ehrhardt [295] (3.2.3.3).

$$\mathrm{cel}(k_c, p, a, b) = \int_0^\infty \frac{a + bt^2}{(1 + pt^2)\sqrt{(1 + t^2)(1 + k_c^2 t^2)}} \mathrm{d}t$$

with the complementary modulus $k_c \neq 0$.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.cel(1.2, -4.333, -1.333, -1.333)
-0.0708205057509719
>>> math53.cel(3.7, -4.333, 0.0,  -1.333)
0.12075231537983412
>>> math53.cel(4.8, 4.333, 1.333, 1.333)
0.5162685345242685
```

27.3.4 Incomplete elliptic integral of the 1st kind $\mathrm{el1}(x, k_c)$

`math53.el1`(*x*, *kc*)

Returns Bulirsch's incomplete elliptic integral of the first kind. See also Bulirsch [162], See also Bulirsch [163], NIST [173], Wikipedia [1292], Ehrhardt [295] (3.2.3.4).

$$\mathrm{el1}(x, k_c) = \int_0^x \frac{\mathrm{d}t}{\sqrt{(1 + t^2)(1 + k_c^2 t^2)}}$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.el1(1.2, -4.333)
0.49012453573756454
>>> math53.el1(3.7, -4.333)
0.6025865718715321
>>> math53.el1(4.8, 4.333)
0.6164652942503261
```

27.3.5 Incomplete elliptic integral of the 2nd kind $\mathrm{el2}(x, k_c, a, b)$

`math53.el2`(*x*, *kc*, *a*, *b*)

Returns Bulirsch's incomplete elliptic integral of the second kind. See also Bulirsch [162], See also Bulirsch [163], NIST [173], Wikipedia [1292], Ehrhardt [295] (3.2.3.5).

$$\mathrm{el2}(x, k_c, a, b) = \int_0^x \frac{a + bt^2}{(1 + t^2)\sqrt{(1 + t^2)(1 + k_c^2 t^2)}} \mathrm{d}t$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.el2(1.2, -4.333, -1.333, -1.333)
-0.6533360061381738
>>> math53.el2(3.7, -4.333, 0.0,  -1.333)
-0.21559574153402697
>>> math53.el2(4.8, 4.333, 1.333, 1.333)
0.8217482372356851
```

27.3.6 Incomplete elliptic integral of the 3rd kind $\mathrm{el3}(x, k_c, p)$

`math53.el3`(x, kc, p)

Returns Bulirsch's incomplete elliptic integral of the third kind. See also Bulirsch [162], See also Bulirsch [163], NIST [173], Wikipedia [1292], Ehrhardt [295] (3.2.3.6).

$$\mathrm{el3}(x, k_c, p) = \int_0^x \frac{1 + t^2}{(1 + pt^2)\sqrt{(1 + t^2)(1 + k_c^2 t^2)}} \mathrm{d}t$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.el3(1.2, -4.333, -1.333)
0.5440817141850122
>>> math53.el3(3.7, -4.333, 0.0)
1.2433057985726927
>>> math53.el3(4.8, 4.333, 1.333)
0.5677080218351377
```

27.4 Maple style elliptic integrals

27.4.1 Complete integral of the 1st kind, $\mathrm{EllipticK}(k)$

`math53.EllipticK(`k`)`

Returns the complete elliptic integral of the first kind K(k) and the real part if $|k| > 1$. See also Maplesoft [365], Ehrhardt [295] (3.2.4.1).

$$\mathrm{EllipticK}(k) = \int_0^1 \frac{\mathrm{d}t}{\sqrt{(1-t^2)(1-k^2t^2)}}$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.EllipticK(-0.9333)
2.459106502858909
>>> math53.EllipticK(0.01)
1.570835598912152
>>> math53.EllipticK(0.9333)
2.459106502858909
```

27.4.2 Complete integral of the 1st kind for imaginary modulus, $\mathrm{EllipticKim}(k)$

`math53.EllipticKim(`k`)`

Returns the complete elliptic integral of the first kind for the imaginary modulus ik with $k \in \mathbb{R}$. See also Maplesoft [365], Ehrhardt [295] (3.2.4.2).

$$\mathrm{EllipticKim}(k) = \int_0^1 \frac{\mathrm{d}t}{\sqrt{(1-t^2)(1+k^2t^2)}}$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.EllipticKim(-0.9333)
1.334879017781761
>>> math53.EllipticKim(0.01)
1.5707570590955058
>>> math53.EllipticKim(0.9333)
1.334879017781761
```

27.4.3 Complementary complete integral of the 1st kind, $\mathrm{EllipticCK}(k) = K'(k)$

`math53.EllipticCK(`k`)`

Returns the complementary complete elliptic integral of the first kind with $k \neq 0$. See also Maplesoft [365], Ehrhardt [295] (3.2.4.3), Ehrhardt [295] (4.2.28).

$$\mathrm{EllipticCK}(k) = \mathrm{EllipticK}(k_c) = \int_0^1 \frac{\mathrm{d}t}{\sqrt{(1-t^2)(1-k_c^2t^2)}}$$

Note: the complex version is called Ellck(z) in Amath.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.EllipticCK(-0.9333)
1.6254736111454573
>>> math53.EllipticCK(0.01)
5.991589340506996
>>> math53.EllipticCK(0.9333)
1.6254736111454573
```

27.4.4 Complete integral of the 2nd kind, $\mathrm{EllipticEC}(k)$

`math53.EllipticEC(k)`

Returns the complete elliptic integral of the second kind $E(k)$ and the real part if $|k| > 1$. See also Maplesoft [364], Ehrhardt [295] (3.2.4.4).

$$\mathrm{EllipticEC}(k) = \int_0^1 \frac{\sqrt{(1-k^2t^2)}}{\sqrt{(1-t^2)}}\mathrm{d}t$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.EllipticEC(-0.9333)
1.127649981567299
>>> math53.EllipticEC(0.01)
1.5707570561503852
>>> math53.EllipticEC(0.9333)
1.127649981567299
```

27.4.5 Complete integral of the 2nd kind for imaginary modulus, $\mathrm{EllipticECim}(k)$

`math53.EllipticECim(k)`

Returns the complete elliptic integral of the second kind for the imaginary modulus ik with $k \in \mathbb{R}$. See also Maplesoft [364], Ehrhardt [295] (3.2.4.5).

$$\mathrm{EllipticECim}(k) = E(ik) = \int_0^1 \frac{\sqrt{(1+k^2t^2)}}{\sqrt{(1-t^2)}}\mathrm{d}t$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.EllipticECim(-0.9333)
1.870953551376072
>>> math53.EllipticECim(0.01)
1.5708355959667861
>>> math53.EllipticECim(0.9333)
1.870953551376072
```

27.4.6 Complementary complete integral of the 2nd kind, $\mathrm{EllipticCE}(k)$

`math53.EllipticCE(k)`

Returns the complementary complete elliptic integral of the second kind. See also Maplesoft [364], Ehrhardt [295] (3.2.4.6).

$$\mathrm{EllipticEC}(k) = \mathrm{EllipticEC}(k_c) = \int_0^1 \frac{\sqrt{(1-k_c^2t^2)}}{\sqrt{(1-t^2)}}\mathrm{d}t$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.EllipticCE(-0.9333)
1.5188621404561577
>>> math53.EllipticCE(0.01)
1.0002745824306631
>>> math53.EllipticCE(0.9333)
1.5188621404561577
```

27.4.7 Complete integral of the 3rd kind, $\mathrm{EllipticPiC}(\nu, k)$

`math53.EllipticPiC(nu, k)`

Returns the complete elliptic integral of the third kind with $|k| \neq 1, \nu \neq 1$ (or its real part if $|k| > 1$). See also Maplesoft [366], Ehrhardt [295] (3.2.4.7).

$$\mathrm{EllipticPiC}(\nu, k) = \int_0^1 \frac{\mathrm{d}t}{(1-\nu t^2)\sqrt{(1-t^2)(1-k^2t^2)}}$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.EllipticPiC(-0.9333, 0.01)
1.129742159472719
>>> math53.EllipticPiC(0.01, -0.9333)
2.4745180633508044
>>> math53.EllipticPiC(0.9333, 0.01)
6.0823893714986585
```

27.4.8 Complete integral of the 3rd kind for imaginary modulus, $\mathrm{EllipticPiCim}(\nu, k)$

`math53.EllipticPiCim(nu, k)`

Returns the complementary complete elliptic integral of the third kind with $\nu \neq 1$. See also Maplesoft [364], Ehrhardt [295] (3.2.4.8).

$$\mathrm{EllipticPiCim}(\nu, k) = \mathrm{EllipticPiC}(\nu, k) = \int_0^1 \frac{\mathrm{d}t}{(1-\nu t^2)\sqrt{(1-t^2)(1+k^2t^2)}}$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.EllipticPiCim(-0.9333, 0.01)
1.1296948994491276
>>> math53.EllipticPiCim(0.01, -0.9333)
1.3410787572966438
>>> math53.EllipticPiCim(0.9333, 0.01)
6.08190599516054
```

27.4.9 Complementary complete integral of the 3rd kind, $\mathrm{EllipticCPi}(\nu, k)$

`math53.EllipticCPi(nu, x)`

Returns the complementary complete elliptic integral of the third kind with $|k| \neq 0, \nu \neq 1$. See also Maplesoft [364], Ehrhardt [295] (3.2.4.9).

$$\mathrm{EllipticCPi}(\nu, k) = \mathrm{EllipticPiC}(\nu, k_c) = \int_0^1 \frac{\mathrm{d}t}{(1-\nu t^2)\sqrt{(1-t^2)(1-k_c^2t^2)}}$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.EllipticCPi(-0.9333, 0.01)
3.4829363034929215
>>> math53.EllipticCPi(0.01, -0.9333)
1.6338040919783785
>>> math53.EllipticCPi(0.9333, 0.01)
60.46495296527363
```

27.4.10 Incomplete integral of the 1st kind, $\mathrm{EllipticF}(z, k)$

`math53.EllipticF`(*z*, *k*)

Returns the incomplete elliptic integral of the first kind with $|z| \le 1, |kz| \le 1$. See also Maplesoft [365], Ehrhardt [295] (3.2.4.10).

$$\mathrm{EllipticF}(z, k) = \int_0^z \frac{\mathrm{d}t}{\sqrt{(1-t^2)(1-k^2t^2)}}$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.EllipticF(-0.9333, 0.01)
-1.2035171794595962
>>> math53.EllipticF(0.01, -0.9333)
0.010000311859028539
>>> math53.EllipticF(0.9333, 0.01)
1.2035171794595962
```

27.4.11 Incomplete integral of the 2nd kind, $\mathrm{EllipticE}(z, k)$

`math53.EllipticE`(*z*, *k*)

Returns the incomplete elliptic integral of the second kind with $|z| \le 1, |kz| \le 1$. See also Maplesoft [364], Ehrhardt [295] (3.2.4.11).

$$\mathrm{EllipticE}(z, k) = \int_0^z \frac{\sqrt{(1-k^2t^2)}}{\sqrt{(1-t^2)}}\mathrm{d}t$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.EllipticE(-0.9333, 0.01)
-1.2034737607138424
>>> math53.EllipticE(0.01, -0.9333)
0.01000002149309969
>>> math53.EllipticE(0.9333, 0.01)
1.2034737607138424
```

27.4.12 Incomplete integral of the 3rd kind, $\mathrm{EllipticPi}(z, \nu, k)$

`math53.EllipticPi`(*z*, *nu*, *k*)

Returns the incomplete elliptic integral of the third kind with $|z| \le 1, |kz| \le 1$. See also Maplesoft [366], Ehrhardt [295] (3.2.4.12).

$$\mathrm{EllipticPi}(z, \nu, k) = \int_0^z \frac{\mathrm{d}t}{(1-\nu t^2)\sqrt{(1-t^2)(1-k_c^2t^2)}}$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.EllipticPi(-0.9333, 0.01, 0.9333)
-1.5540650009536827
>>> math53.EllipticPi(0.01, -0.9333, 0.9333)
0.010000000758985845
>>> math53.EllipticPi(0.9333, 0.01, -0.9333)
1.5540650009536827
```

27.5 Jacobi theta functions at $x = 0$ for $0 \leq q < 1$

27.5.1 Jacobi theta function $\theta_1'(q)$

math53.**jacobi_theta1p**(q)

Returns the Jacobi theta function $\theta_1'(q) = \partial\theta_1(x, q)/\partial x$ at $x = 0$ for $0 \leq q < 1$. See also Wikipedia [1312], MathWorld [960], MathWorld [278], NIST [476], Ehrhardt [295] (3.2.14.1).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.jacobi_theta1p(0.01)
0.632265795377228
>>> math53.jacobi_theta1p(0.5)
0.5489785325603408
>>> math53.jacobi_theta1p(0.9333)
1.8387255175389385e-13
```

27.5.2 Jacobi theta function $\theta_2(q)$

math53.**jacobi_theta02**(q)

Returns the Jacobi theta function $\theta_2(q) = \theta_2(0, q)$ for $0 \leq q < 1$. See also Wikipedia [1312], MathWorld [960], NIST [476], Ehrhardt [295] (3.2.14.2).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.jacobi_theta02(0.01)
0.6325187775875117
>>> math53.jacobi_theta02(0.5)
2.128931250513028
>>> math53.jacobi_theta02(0.9333)
6.74621917080838
```

27.5.3 Jacobi theta function $\theta_3(q)$

math53.**jacobi_theta03**(q)

Returns the Jacobi theta function $\theta_3(q) = \theta_3(0, q)$ for $0 \leq q < 1$. See also Wikipedia [1312], MathWorld [960], NIST [476], Ehrhardt [295] (3.2.14.3).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.jacobi_theta03(0.01)
1.0200000200000001
>>> math53.jacobi_theta03(0.5)
2.128936827211877
>>> math53.jacobi_theta03(0.9333)
6.74621917080838
```

27.5.4 Jacobi theta function $\theta_4(q)$

math53.**jacobi_theta04**(q)

Returns the Jacobi theta function $\theta_4(q) = \theta_4(0, q)$ for $-1 < q < 1$. See also Wikipedia [1312], MathWorld [960], NIST [476], Ehrhardt [295] (3.2.14.4).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.jacobi_theta04(0.01)
0.98000002
>>> math53.jacobi_theta04(0.5)
0.12112420800258053
>>> math53.jacobi_theta04(0.9333)
4.040136238779326e-15
```

27.6 Inverse Jacobi elliptic functions

The inverse Jacobi elliptic functions can be defined like the inverse trigonometric functions: e.g. if $\mathrm{sn}(y,k)=x$ then $y=\mathrm{arcsn}(x,k)$; they are multivalued and their principal values are returned. The functions can be represented as elliptic integrals [30, §22.15(ii)] and they are computed with the incomplete elliptic integral $F(.,k)$ using the table from Abramowitz and Stegun [1, p.596].

27.6.1 Inverse Jacobi elliptic function $\mathrm{arcsn}(x,k)$

`math53.jacobi_arcsn`(x, k)

Returns the inverse Jacobi elliptic function $\mathrm{arcsn}(x,k)$ for $|x|\leq 1$ and $|kx|\leq 1$. See also NIST [474], Ehrhardt [295] (3.2.12.1).

$$\mathrm{arcsn}(x,k)=F(\arcsin(x),k).$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.jacobi_arcsn(0.01, 0.5)
0.010000208342552622
>>> math53.jacobi_arcsn(0.5, 0.9333)
0.5455929205316519
>>> math53.jacobi_arcsn(0.9333, 0.5)
1.2646631607926928
```

27.6.2 Inverse Jacobi elliptic function $\mathrm{arccn}(x,k)$

`math53.jacobi_arccn`(x, k)

Returns the inverse Jacobi elliptic function $\mathrm{arccn}(x,k)$ for $|x|<1$ if $k\leq 1$, and $x^2>1-1/k^2$ if $k>1$. See also NIST [474], Ehrhardt [295] (3.2.12.2).

$$\mathrm{arccn}(x,k)=F(\arccos(x),k).$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.jacobi_arccn(0.01, 0.5)
1.6742032211210454
>>> math53.jacobi_arccn(0.5, 0.9333)
1.2569383151950466
>>> math53.jacobi_arccn(0.9333, 0.5)
0.3693405114569477
```

27.6.3 Inverse Jacobi elliptic function $\mathrm{arcdn}(x,k)$

`math53.jacobi_arcdn`(x, k)

Returns the inverse Jacobi elliptic function $\mathrm{arcdn}(x,k)$ for $0\leq x\leq 1$ and $k^2+x^2>1$ if $|k|<1$; and $|x|\leq 1$ if $|k|>1$. See also NIST [474], Ehrhardt [295] (3.2.12.3).

$$\mathrm{arcdn}(x,k)=F\left(\arcsin\left(\sqrt{\frac{1-x^2}{k^2}}\right),k\right).$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.jacobi_arcdn(0.81, 0.85)
0.818383723341855
```

(continues on next page)

(continued from previous page)

```
>>> math53.jacobi_arcdn(0.85, 0.9333)
0.6333740262678361
>>> math53.jacobi_arcdn(0.9333, 0.85)
0.44639702745946724
```

27.6.4 Inverse Jacobi elliptic function $\operatorname{arccd}(x, k)$

`math53.jacobi_arccd`(x, k)

Returns the inverse Jacobi elliptic function $\operatorname{arccd}(x, k)$ for $|x| \leq 1$ if $|k| < 1$; and $|x| \geq 1$ if $|k| > 1$. See also NIST [474], Ehrhardt [295] (3.2.12.4).

$$\operatorname{arccd}(x, k) = F\left(\arcsin\left(\sqrt{\frac{1 - x^2}{1 - k^2 x^2}}\right), k\right).$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.jacobi_arccd(0.01, 0.5)
1.6757501464700435
>>> math53.jacobi_arccd(0.5, 0.9333)
1.9135135823272573
>>> math53.jacobi_arccd(0.9333, 0.5)
0.4210871940199031
```

27.6.5 Inverse Jacobi elliptic function $\operatorname{arcsd}(x, k)$

`math53.jacobi_arcsd`(x, k)

Returns the inverse Jacobi elliptic function $\operatorname{arcsd}(x, k)$ for $x \in \mathbb{R}$ if $|k| \geq 1$ and $|x| < 1/\sqrt{1 - k^2}$ otherwise. See also NIST [474], Ehrhardt [295] (3.2.12.5).

$$\operatorname{arcsd}(x, k) = F\left(\arcsin\left(\sqrt{\frac{x^2}{1 + k^2 x^2}}\right), k\right).$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.jacobi_arcsd(1.01, 1.5)
0.01000008333708349
>>> math53.jacobi_arcsd(1.5, 1.9333)
0.48599631639488927
>>> math53.jacobi_arcsd(1.9333, 1.5)
1.0461374961953611
```

27.6.6 Inverse Jacobi elliptic function $\operatorname{arcnd}(x, k)$

`math53.jacobi_arcnd`(x, k)

Returns the inverse Jacobi elliptic function $\operatorname{arcnd}(x, k)$ for $x \geq 1$ and $x^2 \leq k^2/(1 - k^2)$ if $|k| < 1$. See also NIST [474], Ehrhardt [295] (3.2.12.6).

$$\operatorname{arcnd}(x, k) = F\left(\arcsin\left(\sqrt{\frac{x^2 - 1}{k^2 x^2}}\right), k\right).$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.jacobi_arcnd(1.01, 1.5)
0.09402852893196235
>>> math53.jacobi_arcnd(1.5, 1.9333)
0.44786848710680505
>>> math53.jacobi_arcnd(1.9333, 1.5)
0.7366908030186489
```

27.6.7 Inverse Jacobi elliptic function $\operatorname{arcdc}(x, k)$

`math53.jacobi_arcdc`(x, k)

Returns the inverse Jacobi elliptic function $\operatorname{arcdc}(x, k)$ for $|x| \geq 1$ if $|k| < 1$; and $|x| \leq 1$ if $|k| > 1$. See also NIST [474], Ehrhardt [295] (3.2.12.7).

$$\operatorname{arcdc}(x, k) = F\left(\arcsin\left(\sqrt{\frac{1 - x^2 - 1}{k^2 - x^2}}\right), k\right).$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.jacobi_arcdc(0.01, 1.5)
1.1997781698230954
>>> math53.jacobi_arcdc(0.5, 1.9333)
0.602871393168387
>>> math53.jacobi_arcdc(0.9333, 1.5)
0.3230254324880706
```

27.6.8 Inverse Jacobi elliptic function $\operatorname{arcnc}(x, k)$

`math53.jacobi_arcnc`(x, k)

Returns the inverse Jacobi elliptic function $\operatorname{arcnc}(x, k)$ for $x \geq 1$, and $x^2 \leq k^2/(k^2 - 1)$ for $|k| > 1$. See also NIST [474], Ehrhardt [295] (3.2.12.8).

$$\operatorname{arcnc}(x, k) = F(\operatorname{arcsec}(x), k).$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.jacobi_arcnc(1.01, 0.5)
0.1409520642226382
>>> math53.jacobi_arcnc(1.5, 0.9333)
0.9408474060083183
>>> math53.jacobi_arcnc(1.9333, 0.5)
1.0673523684807162
```

27.6.9 Inverse Jacobi elliptic function $\operatorname{arcsc}(x, k)$

`math53.jacobi_arcsc`(x, k)

Returns the inverse Jacobi elliptic function $\operatorname{arcsc}(x, k)$ for $x \in \mathbb{R}$ if $|k| \leq 1$ and $|x| \leq 1/\sqrt{k^2 - 1}$ if $|k| > 1$. See also NIST [474], Ehrhardt [295] (3.2.12.9).

$$\operatorname{arcsc}(x, k) = F(\arctan(x), k).$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.jacobi_arcsc(0.01, 0.5)
0.009999708348801099
>>> math53.jacobi_arcsc(0.5, 0.9333)
0.4787388167314662
>>> math53.jacobi_arcsc(0.9333, 0.5)
0.7675883759164223
```

27.6.10 Inverse Jacobi elliptic function $\operatorname{arcns}(x, k)$

`math53.jacobi_arcns`(x, k)

Returns the inverse Jacobi elliptic function $\operatorname{arcns}(x, k)$ for $|x| \geq 1$ if $|k| < 1$ and $|x| \geq |k|$ if $|k| > 1$. See also NIST [474], Ehrhardt [295] (3.2.12.10).

$$\operatorname{arcns}(x, k) = F(\operatorname{arccsc}(x), k).$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.jacobi_arcns(1.01, 0.5)
1.523305059639121
>>> math53.jacobi_arcns(1.5, 0.9333)
0.7925159210200553
>>> math53.jacobi_arcns(1.9333, 0.5)
0.5501460517169048
```

27.6.11 Inverse Jacobi elliptic function $\operatorname{arcds}(x, k)$

`math53.jacobi_arcds`(x, k)

Returns the inverse Jacobi elliptic function $\operatorname{arcds}(x, k)$ for $x \in \mathbb{R}$ if $|k| > 1$ and $|x| \geq \sqrt{1 - k^2}$ if $|k| < 1$. See also NIST [474], Ehrhardt [295] (3.2.12.11).

$$\operatorname{arcds}(x, k) = F\left(\arcsin\left(\sqrt{\frac{1}{k^2 + x^2}}\right), k\right).$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.jacobi_arcds(0.01, 1.5)
1.2004822727201372
>>> math53.jacobi_arcds(0.5, 1.9333)
0.7245630486544666
>>> math53.jacobi_arcds(0.9333, 1.5)
0.7261996704910932
```

27.6.12 Inverse Jacobi elliptic function $\operatorname{arccs}(x, k)$

`math53.jacobi_arccs`(x, k)

Returns the inverse Jacobi elliptic function $\operatorname{arccs}(x, k)$ for $x \in \mathbb{R}$ if $|k| < 1$ and $|x| \geq \sqrt{k^2 - 1}$ if $|k| > 1$. See also NIST [474], Ehrhardt [295] (3.2.12.12).

$$\operatorname{arccs}(x, k) = F(\operatorname{arccot}(x), k).$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.jacobi_arccs(0.01, 0.5)
1.6742037984472615
>>> math53.jacobi_arccs(0.5, 0.9333)
1.3622156081449894
>>> math53.jacobi_arccs(0.9333, 0.5)
0.8413253980268582
```

27.7 Lemniscate functions

27.7.1 Lemniscate sine function, $\mathrm{sinlemn}(x)$

math53.**sinlemn**(x)

Returns the lemniscate sine function $\mathrm{sinlemn}(x) = \frac{\sqrt{2}}{2}\mathrm{sd}\left(x\sqrt{2}, \frac{\sqrt{2}}{2}\right)$, where $\mathrm{sd}(\cdot)$ is a Jacobi elliptic function.

See also: Wikipedia [1323], MathWorld [963], Ehrhardt [295] (3.2.16.1).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.sinlemn(0.01)
0.00999999999
>>> math53.sinlemn(0.5)
0.496891190419312
>>> math53.sinlemn(0.9333)
0.8666952283443882
```

27.7.2 Lemniscate cosine function, $\mathrm{coslemn}(x)$

math53.**coslemn**(x)

Returns the lemniscate cosine function $\mathrm{coslemn}(x) = \mathrm{cn}\left(x\sqrt{2}, \frac{\sqrt{2}}{2}\right)$, where $\mathrm{cn}(\cdot)$ is a Jacobi elliptic function.

See also: Wikipedia [1323], MathWorld [963], Ehrhardt [295] (3.2.16.2).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.coslemn(0.01)
0.9999000049996999
>>> math53.coslemn(0.5)
0.7771594206519663
>>> math53.coslemn(0.9333)
0.3769611253836269
```

27.7.3 Inverse lemniscate sine function, $\mathrm{arcsl}(x)$

math53.**arcsl**(x)

Returns the inverse lemniscate sine function $\mathrm{arcsl}(x) = \frac{1}{\sqrt{2}}\mathrm{arcsd}\left(x\sqrt{2}, \frac{\sqrt{2}}{2}\right)$, $|x| \leq 1$, where $\mathrm{arcsd}(\cdot)$ is an inverse Jacobi elliptic function.

See also: Wikipedia [1323], MathWorld [963], Ehrhardt [295] (3.2.16.3).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.arcsl(0.01)
1.3010287771360596
>>> math53.arcsl(0.5)
0.8078193339687287
>>> math53.arcsl(0.9333)
0.2626495240692557
```

27.7.4 Inverse lemniscate cosine function, $\operatorname{arccl}(x)$

`math53.arccl(`x`)`

Returns the inverse lemniscate cosine function $\operatorname{arccl}(x) = \frac{1}{\sqrt{2}}\operatorname{arccn}\left(x\sqrt{2}, \frac{\sqrt{2}}{2}\right), |x| \leq 1$, where $\operatorname{arccn}(\cdot)$ is an inverse Jacobi elliptic function.

See also: Wikipedia [1323], MathWorld [963], Ehrhardt [295] (3.2.16.4).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.arccl(0.01)
0.010000000010000001
>>> math53.arccl(0.5)
0.5032094431773307
>>> math53.arccl(0.9333)
1.0483792530768037
```

27.8 Neville theta functions

27.8.1 Neville $\theta_c(x, k)$

math53.**neville_theta_c**(x, k)

Returns the Neville theta function $\theta_c(x,k) = \dfrac{\theta_2(v, q(k))}{\theta_2(0, q(k))}, \quad v = \dfrac{\pi x}{2K(k)}, |k| \leq 1$, and $q(k)$ is the elliptic nome.

See also: Wikipedia [1325], MathWorld [279], Ehrhardt [295] (3.2.15.2).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.neville_theta_c(0.01, 0.5)
0.999956474832081
>>> math53.neville_theta_c(0.5, 0.9333)
0.9436331810661398
>>> math53.neville_theta_c(0.9333, 0.5)
0.6446023742055126
```

27.8.2 Neville $\theta_d(x, k)$

math53.**neville_theta_d**(x, k)

Returns the Neville theta function $\theta_d(x,k) = \dfrac{\theta_3(v, q(k))}{\theta_3(0, q(k))}, \quad v = \dfrac{\pi x}{2K(k)}, |k| \leq 1$, and $q(k)$ is the elliptic nome.

See also: Wikipedia [1325], MathWorld [280], Ehrhardt [295] (3.2.15.3).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.neville_theta_d(0.01, 0.5)
0.9999939746842494
>>> math53.neville_theta_d(0.5, 0.9333)
0.9602114827440184
>>> math53.neville_theta_d(0.9333, 0.5)
0.9594825353083286
```

27.8.3 Neville $\theta_n(x, k)$

math53.**neville_theta_n**(x, k)

Returns the Neville theta function $\theta_n(x,k) = \dfrac{\theta_4(v, q(k))}{\theta_4(0, q(k))}, \quad v = \dfrac{\pi x}{2K(k)}, |k| \leq 1$, and $q(k)$ is the elliptic nome.

See also: Wikipedia [1325], MathWorld [281], Ehrhardt [295] (3.2.15.4).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.neville_theta_n(0.01, 0.5)
1.0000064743224766
>>> math53.neville_theta_n(0.5, 0.9333)
1.065460920528952
>>> math53.neville_theta_n(0.9333, 0.5)
1.0435380078392624
```

27.8.4 Neville $\theta_s(x, k)$

math53.**neville_theta_s**(x, k)

Returns the Neville theta function $\theta_s(x,k) = \dfrac{2K(k)}{\pi}\dfrac{\theta_1(v, q(k))}{\theta_1'(0, q(k))}, \quad v = \dfrac{\pi x}{2K(k)}, |k| \leq 1$, and $q(k)$ is the elliptic nome.

See also: Wikipedia [1325], MathWorld [282], Ehrhardt [295] (3.2.15.1).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.neville_theta_s(0.01, 0.5)
0.009999856412344637
>>> math53.neville_theta_s(0.5, 0.9333)
0.4947356796971494
>>> math53.neville_theta_s(0.9333, 0.5)
0.8206456927162612
```

CHAPTER

TWENTYEIGHT

REAL FUNCTIONS RELATED TO LERCHS PHI

28.1 Polygamma, and related functions

28.1.1 Pentagamma function $\psi'''(x)$

`math53.pentagamma(x)`

Returns the pentagamma function $\psi'''(x), \quad x \neq 0, -1, -2, \ldots$ The function returns the Hurwitz zeta value $6\zeta(4, x)$ if x is positive; for $x < 0$ it returns $\psi'''(x) = -2\pi^4 \left(1 + 4\cot^2(\pi x) + 3\cot^4(\pi x)\right) - 6\zeta(4, 1 - x)$.

See also Wikipedia [1262], MathWorld [889], NIST [23], BoostMath [109], Ehrhardt [295] (3.5.6.5).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.pentagamma(0.01)
600000006.2510617
>>> math53.pentagamma(10.5)
0.001990086237144355
>>> math53.pentagamma(20.9333)
0.00023415053202383002
```

28.1.2 Tetragamma function, $\psi''(x)$

`math53.tetragamma(x)`

Returns the tetragamma function $\psi''(x), \quad x \neq 0, -1, -2, \ldots$ The function returns the Hurwitz zeta value $-2\zeta(3, x)$ if x is positive; for $x < 0$ it returns $\psi''(x) = -2\pi^3 \cot(\pi x)\left(1 + \cot^2(\pi x)\right) - 2\zeta(3, 1 - x)$.

See also Wikipedia [1262], MathWorld [889], NIST [23], BoostMath [109], Ehrhardt [295] (3.5.6.4).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.tetragamma(0.01)
-2000002.3403986772
>>> math53.tetragamma(10.5)
-0.009975144247715168
>>> math53.tetragamma(20.9333)
-0.0023936641630670093
```

28.1.3 Auxiliary function $\psi^*(x)$

`math53.psistar(x)`

Returns $\psi^*(x) = \psi(x) - \log(x), x > 0$. The function is useful when computing differences of ψ functions, because it can avoid cancellation for larger x values. See also Ehrhardt [295] (3.5.6.2).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.psistar(0.01)
-95.95571527188056
>>> math53.psistar(10.5)
-0.04837422286579131
>>> math53.psistar(20.9333)
-0.024075515594002023
```

28.1.4 Inverse digamma function $\psi^{-1}(y)$

math53.**psi_inv**(y)

Returns $\psi^{-1}(y)$, the functional inverse of of the digamma function, i.e. it returns x with $\psi(x) = y$.

See also Wikipedia [1270], MathWorld [913], NIST [23], BoostMath [117], Ehrhardt [295] (3.5.6.7).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.psi_inv(0.01)
1.4720152539294011
>>> math53.psi_inv(10.5)
36316.00267309933
>>> math53.psi_inv(20.9333)
1233720207.3863456
```

28.1.5 Bateman function $G(x)$

math53.**bateman_g**(x)

Returns the Bateman function $G(x) = \psi((x+1)/2) - \psi(x/2); x \neq 0, -1, -2, \ldots$ See also Ehrhardt [295] (3.5.6.8).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.bateman_g(0.01)
198.6299765458315
>>> math53.bateman_g(10.5)
0.09975303466039102
>>> math53.bateman_g(20.9333)
0.048910504209268506
```

28.2 Polylogarithm, and related functions

28.2.1 Polylogarithm of integer order, $\mathrm{Li}_n(x)$

math53.**polylog_i**(*n*, *x*)

Returns the polylogarithm of integer order n, $\mathrm{Li}_n(x) = \sum_{k=1}^{\infty} \frac{x^k}{k^n}, \quad n \in \mathbb{Z}, |x| < 1$, or its analytic continuation; for $n > 0$, $x > 1$ the real part of $\mathrm{Li}_n(x)$ is returned.

See also Wikipedia [1326], MathWorld [964], NIST [18], Ehrhardt [295] (3.6.11).

Returns the polylogarithm function of integer order n.

This function returns the polylogarithm function of integer order n

$$\mathrm{Li}_n(z) = \sum_{k=1}^{\infty} \frac{z^k}{k^n}, \quad n \in \mathbb{Z}, |z| < 1.$$

or its analytic continuation; for $n > 0$ there is the arguments restriction $x \leq 1$.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.polylog_i(2, 0.01)
0.010025111740139094
>>> math53.polylog_i(3, 10.5)
5.66534093854826
>>> math53.polylog_i(4, 20.9333)
13.767054582329026
```

28.2.2 Fermi-Dirac integrals of integer order, $F_n(x)$

math53.**fermi_dirac_i**(*n*, *x*)

Returns the Fermi-Dirac integral of integer order n, $F_s(x) = \frac{1}{\Gamma(n+1)} \int_0^{\infty} \frac{t^n}{e^{t-x}+1} = -\mathrm{Li}_{n+1}(-e^x)\,.$

See also: Wikipedia [1313], MathWorld [952], Ehrhardt [295] (3.6.8.2).

This function returns the complete Fermi-Dirac integrals $F_n(x)$ of integer order. They are defined for real orders $s > -1$ by

$$F_s(x) = \frac{1}{\Gamma(s+1)} \int_0^{\infty} \frac{t^s}{e^{t-x}+1} \mathrm{d}t$$

and by analytic continuation for $s \leq -1$ using polylogarithms

$$F_s(x) = -\mathrm{Li}_{s+1}(-e^x).$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.fermi_dirac_i(2, 0.01)
0.9098020885004644
>>> math53.fermi_dirac_i(3, 10.5)
599.031966057601
>>> math53.fermi_dirac_i(4, 20.9333)
36051.591345246416
```

28.2.3 Fermi-Dirac integral $F_{-1/2}(x)$

math53.**fermi_dirac_m05**(x)

Returns the Fermi-Dirac integral $F_{-1/2}(x)$. See also: Wikipedia [1313], MathWorld [952], Ehrhardt [295] (3.6.8.3).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.fermi_dirac_m05(0.01)
0.608705610911171
>>> math53.fermi_dirac_m05(10.5)
3.6420723652672895
>>> math53.fermi_dirac_m05(20.9333)
5.157769932482041
```

28.2.4 Fermi-Dirac integral $F_{1/2}(x)$

math53.**fermi_dirac_p05**(x)

Returns the Fermi-Dirac integral $F_{1/2}(x)$. See also: Wikipedia [1313], MathWorld [952], Ehrhardt [295] (3.6.8.3).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.fermi_dirac_p05(0.01)
0.7712150360437194
>>> math53.fermi_dirac_p05(10.5)
25.88346611317671
>>> math53.fermi_dirac_p05(20.9333)
72.25098647441794
```

28.2.5 Fermi-Dirac integral $F_{3/2}(x)$

math53.**fermi_dirac_p15**(x)

Returns the Fermi-Dirac integral $F_{3/2}(x)$. See also: Wikipedia [1313], MathWorld [952], Ehrhardt [295] (3.6.8.3).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.fermi_dirac_p15(0.01)
0.874881667590789
>>> math53.fermi_dirac_p15(10.5)
113.49527140479812
>>> math53.fermi_dirac_p15(20.9333)
611.7653726268513
```

28.2.6 Fermi-Dirac integral $F_{5/2}(x)$

math53.**fermi_dirac_p25**(x, s)

Returns the Fermi-Dirac integral $F_{5/2}(x)$. See also: Wikipedia [1313], MathWorld [952], Ehrhardt [295] (3.6.8.3).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.fermi_dirac_p25(0.01)
0.9362639349902176
>>> math53.fermi_dirac_p25(10.5)
364.9252593211593
>>> math53.fermi_dirac_p25(20.9333)
3726.9235556746216
```

28.2.7 Inverse tangent integral, $\mathrm{Ti}_2(x)$

`math53.tangent_int_2(x)`

Returns the inverse tangent integral $\mathrm{Ti}_2(x) = \int_0^x \frac{\arctan(t)}{t}\,\mathrm{d}t$.

See also: Wikipedia [1327], MathWorld [958], Ehrhardt [295] (3.6.16).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.tangent_int_2(0.01)
0.009999888892888685
>>> math53.tangent_int_2(10.5)
3.788674042119505
>>> math53.tangent_int_2(20.9333)
4.8250862474762
```

28.2.8 Lobachevsky's log-cos integral, $L(x)$

`math53.lobachevsky_c(x)`

Returns Lobachevsky's log-cos integral $L(x) = \int_0^x \log|\cos(t)|\,\mathrm{d}t$. See also: Ehrhardt [295] (3.6.18).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.lobachevsky_c(0.01)
1.6666833336508016e-07
>>> math53.lobachevsky_c(10.5)
6.7712697858797855
>>> math53.lobachevsky_c(20.9333)
15.017229619310305
```

28.2.9 Lobachevsky's log-sin integral, $\Lambda(x)$

`math53.lobachevsky_s(x, s)`

Returns Lobachevsky's log-sin integral $\Lambda(x) = \int_0^x \log|2\sin(t)|\,\mathrm{d}t$. See also: Ehrhardt [295] (3.6.19).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.lobachevsky_s(0.01)
0.049120285609948126
>>> math53.lobachevsky_s(10.5)
0.3226979802070858
>>> math53.lobachevsky_s(20.9333)
-0.33243071505340765
```

28.2.10 Debye functions, $\mathrm{D}_n(x)$

`math53.debye(n, x)`

Returns the Debye function $\mathrm{D}_n(x) = \frac{n}{x^n}\int_0^x \frac{t^n}{e^t-1}\,\mathrm{d}t, \quad n > 0, x \geq 0$.

See also: Wikipedia [1334], MathWorld [991], Abramowitz and Stegun. [4] section 27.1, Ehrhardt [295] (3.10.6), Dubinov and Dubinova [287].

This routine returns the Debye functions

$$\mathrm{D}_n(x) = \frac{n}{x^n}\int_0^x \frac{t^n}{e^t-1}\mathrm{d}t \quad (n>0, x\geq 0).$$

$$\mathrm{D}_n^{(1)}(x) = \int_0^x \frac{t^n}{e^t-1}\mathrm{d}t = n!\zeta(n+1) - n!Z_{n+1}(z).$$

$$\mathrm{D}_n^{(2)}(x) = \int_x^\infty \frac{t^n}{e^t-1}\mathrm{d}t = n!Z_{n+1}(z).$$

$$\mathrm{D}_n^{(2)}(x) = \Gamma(n+1)\zeta(n+1) - \mathrm{D}_n^{(1)}(x).$$

$$\mathrm{D}_n^{(1)}(x) = n!\zeta(n+1) - \mathrm{D}_n^{(2)}(x).$$

$$Z_{n+1}(z) = \sum_{k=0}^{n} \mathrm{Li}_{n-k+1}(e^{-z})\frac{z^k}{k!} \quad (n=1,2,3,\ldots).$$

In terms of the incomplete zeta functions or "Debye functions" (Abramowitz & Stegun 1972, § 27.1):

$$Z_n(z) = \frac{1}{(n-1)!}\int_z^\infty \frac{t^{n-1}}{e^t-1}\mathrm{d}t \qquad (n=1,2,3,\ldots),$$

the polylogarithm Lin(z) for positive integer n may be expressed as the finite sum (Wood 1992, § 16):

$$\mathrm{Li}_n(e^\mu) = \sum_{k=0}^{n-1} Z_{n-k}(-\mu)\frac{\mu^k}{k!} \qquad (n=1,2,3,\ldots).$$

A remarkably similar expression relates the "Debye functions" Zn(z) to the polylogarithm:

$$Z_n(z) = \sum_{k=0}^{n-1} \mathrm{Li}_{n-k}(e^{-z})\frac{z^k}{k!} \qquad (n=1,2,3,\ldots).$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.debye(2, 0.01)
0.9966708333287038
>>> math53.debye(3, 10.5)
0.016717989806569248
>>> math53.debye(4, 20.9333)
0.0005184007550452067
```

28.2.11 Transport integral, $\mathrm{J}_n(x)$

`math53.transport_jn(n, x)`

Returns the transport function $\mathrm{J}_n(x) = \int_0^x \frac{t^n e^t}{(e^t-1)^2}\,\mathrm{d}t, \quad n\geq 2, x\geq 0.$

See also: Ehrhardt [295] (3.10.24).

A.J. MacLeod, The numerical computation of transport integrals, 1992, Computer Physics Communications, 69, pp. 229-234, https://doi.org/10.1016/0010-4655(92)90162-R,

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.transport_jn(2, 0.01)
0.009999972222305555
>>> math53.transport_jn(3, 10.5)
7.169455825440913
>>> math53.transport_jn(4, 20.9333)
25.97556753445377
```

28.3 Riemann zeta, and related functions

28.3.1 Riemann $\zeta(n)$ for integer arguments

math53.**zeta_i**(n)

Returns the Riemann zeta function $\zeta(n)$ for integer arguments $n \neq 1$. For $n > 63$ the result is 1, for $0 \leq n \leq 63$ the value is taken from a table, otherwise the Bernoulli numbers are used: $\zeta(n) = B_{1-n}/(n-1)$ for $n < 0$.

See also Wikipedia [1328], MathWorld [965], NIST [19], BoostMath [158], Ehrhardt [295] (3.6.1.2).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.zeta_i(2)
1.6449340668482264
>>> math53.zeta_i(3)
1.2020569031595942
>>> math53.zeta_i(4)
1.0823232337111381
```

28.3.2 Riemann $\zeta(1+x)$

math53.**zeta1p**(x)

Returns the Riemann zeta function $\zeta(1+x)$ for $x \neq 0$. Normally used with $|x| \ll 1$ for increased accuracy near the pole of $\zeta(s)$ at $s = 1$.

See also Wikipedia [1328], MathWorld [965], NIST [19], BoostMath [158], Ehrhardt [295] (3.6.1.3).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.zeta1p(0.01)
100.57794333849687
>>> math53.zeta1p(10.5)
1.0003486558834918
>>> math53.zeta1p(20.9333)
1.0000002497344977
```

28.3.3 Dirichlet eta function for integer argument, $\eta(n)$

math53.**dirichlet_eta_i**(n)

Returns the Dirichlet eta function $\eta(n)$ for integer arguments. For $n > 64$ the result is 1, for $0 \leq n \leq 64$ the value is taken from a table, otherwise for $n < 0$ the Bernoulli numbers are used: $\eta(n) = (2^{1-n} - 1)B_{1-n}/(1-n)$.

See also: MathWorld [992], Ehrhardt [295] (3.6.3.2).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.dirichlet_eta_i(2)
0.8224670334241132
>>> math53.dirichlet_eta_i(3)
0.9015426773696957
>>> math53.dirichlet_eta_i(4)
0.9470328294972459
```

28.3.4 Prime zeta function

math53.**primezeta**(s)

Returns for $x > 0.2$ the prime zeta function $P(x) = \sum_{p \text{ prime}} p^{-x}$, or its real part for $x < 1$.

See also Ehrhardt [295] (3.6.2).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.primezeta(2.01)
0.4473533160988981
>>> math53.primezeta(10.5)
0.0006898729399747471
>>> math53.primezeta(20.9333)
4.995031614994917e-07
```

28.3.5 Riemann prime counting function, $R(x)$

math53.**riemann_r**(x)

Returns $R(x) = \sum_{n=1}^{\infty} \frac{\mu(n)}{n} \text{li}(x^{1/n}) 1 + \sum_{k=1}^{\infty} \frac{\log^k x}{k k! \zeta(k+1)}$, the Riemann prime counting function, for $x > 0$.

See also Wikipedia [1284], Wikipedia [1285], MathWorld [927], Wikipedia [1283], MathWorld [928], Ehrhardt [295] (3.10.20).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.riemann_r(2.01)
1.5459341840849095
>>> math53.riemann_r(10.5)
4.725293716386582
>>> math53.riemann_r(220.9333)
48.32330658563835
```

28.3.6 Inverse of the Riemann prime counting function, $R^{-1}(x)$

math53.**riemann_r_inv**(x)

Returns the functional inverse of the Riemann prime counting function, i.e. $R(R^{-1}(x)) = x$, for $x \geq 1.125$.

See also Ehrhardt [295] (3.10.21).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.riemann_r_inv(2.01)
3.0121183149089292
>>> math53.riemann_r_inv(10.5)
31.308893414099234
>>> math53.riemann_r_inv(220.9333)
1378.8514211496115
```

28.3.7 Rogers-Ramanujan continued fraction

math53.**rogers_ramanujan_cf**(q)

Returns $R(q) = \frac{q^{1/5}}{1+} \frac{q}{1+} \frac{q^2}{1+} \frac{q^3}{1+} \frac{q^5}{1+}$, the Rogers-Ramanujan continued fraction, for $|q| < 1$.

See also Ehrhardt [295] (3.10.22).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.rogers_ramanujan_cf(0.01)
0.3941659056233625
>>> math53.rogers_ramanujan_cf(0.5)
0.6180183781955219
>>> math53.rogers_ramanujan_cf(0.9333)
0.6180339887498949
```

28.3.8 Moebius function, $\mu(n)$

`math53.moebius(n)`

Returns $\mu(n)$, the Möbius function.

For integer n, the Moebius μ function $\mu(n)$ equals 0 if n has repeated integer factors. Otherwise, if n is the product of k distinct primes, the Moebius μ function $\mu(n)$ equals $(-1)^k$.

https://en.wikipedia.org/wiki/M%C3%B6bius_function

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.moebius(21)
1
>>> math53.moebius(30)
-1
>>> math53.moebius(40)
0
```

28.3.9 q-Pochhammer Euler function, $(q)_\infty$

`math53.euler_q(n, x)`

Returns $\phi(q) = (q)_\infty = \prod_{k=1}^{\infty} \left(1 - q^k\right)$, the q-Pochhammer Euler function, for $-1 \leq q \leq 1$.

See also: MathWorld [1023], Wikipedia [1389], Ehrhardt [295] (3.10.19).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.euler_q(0.01)
0.989900000010001
>>> math53.euler_q(0.5)
0.2887880950866024
>>> math53.euler_q(0.9333)
4.2824759927091205e-10
```

28.4 Miscellaneous functions

28.4.1 Log-series distribution, pmf

`math53.logseries_pmf(p, k)`

Returns pmf(x), the value of the probability mass function (*Pmf*) of the log-series distribution with shape parameters $p, 0 \leq p \leq 1$, $k > 1$. and the support interval $(0, +\infty)$.

See also Wikipedia [1220], MathWorld [824], Johnson *et al.* [387], Ehrhardt [295] (3.9.17).

$$\text{pmf}(x) = \frac{-1}{\log(1-p)} \frac{p^k}{k}.$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.logseries_pmf(0.01, 1)
0.9949916247342216
>>> math53.logseries_pmf(0.5, 2)
0.18033688011112042
>>> math53.logseries_pmf(0.9333, 3)
0.10008431129451109
```

28.4.2 Log-series distribution, cdf

`math53.logseries_cdf(p, k)`

Returns cdf(x), the value of the cumulative distribution function (*Cdf*) of the log-series distribution with shape parameters $p, 0 \leq p \leq 1$, $k > 1$. and the support interval $(0, +\infty)$.

See also Wikipedia [1220], MathWorld [824], Johnson *et al.* [387], Ehrhardt [295] (3.9.17).

$$\text{cdf}(x) = 1 + \frac{B(p; k+1, 0)}{\log(1-p)} = 1 + \frac{a^k(\Phi(p, 1, k) - 1/k)}{\log(1-p)},$$

where $B(\cdot)$ is the incomplete beta function, and $\Phi(\cdot)$ is Lerch's transcendent.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.logseries_cdf(0.01, 1)
0.9949916247342216
>>> math53.logseries_cdf(0.5, 2)
0.9016844005556022
>>> math53.logseries_cdf(0.9333, 3)
0.6056425762046286
```

28.4.3 Zeta distribution, pmf

`math53.zeta_pmf(r, k)`

Returns pmf(x), the value of the probability mass function (*Pmf*) of the zeta distribution with parameter r, and $0 \leq q \leq 1$.

See also Wikipedia [1224], Rinne [478], Johnson *et al.* [387] page 527, Ehrhardt [295] (3.9.34).

$$\text{pmf}_X(k) = \frac{k^{-(r+1)}}{\zeta(r+1)}.$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.zeta_pmf(0.01, 1)
0.009942537765307869
>>> math53.zeta_pmf(0.5, 2)
0.1353378988096703
>>> math53.zeta_pmf(0.9333, 3)
0.0698271086340029
```

28.4.4 Zeta distribution, cdf

`math53.zeta_cdf(`r, k`)`

Returns cdf(x), the value of the cumulative distribution function (*Cdf*) of the zeta distribution:

$$\text{cdf}(x) = \frac{H_k^{r+1}}{\zeta(r+1)} = 1 - \frac{\zeta(r+1, k+1)}{\zeta(r+1)}.$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.zeta_cdf(0.01, 1)
0.009942537765308734
>>> math53.zeta_cdf(0.5, 2)
0.5181312828090969
>>> math53.zeta_cdf(0.9333, 3)
0.806786037677741
```

CHAPTER

TWENTYNINE

REAL FUNCTIONS RELATED TO ${}_0F_1$

29.1 Bessel functions of integer order

29.1.1 Bessel function of the 1st kind, order 0, $J_0(x)$

`math53.`**`bessel_j0`**(x)

where `ctx` is `math53` or `ctxcpp`.

Returns $J_0(x)$, the Bessel function of the 1st kind, order zero. See also Wikipedia [1245], MathWorld [874], NIST [438], BoostMath [94], Ehrhardt [295] (3.1.1.1).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.bessel_j0(0.01)
0.9999750001562496
>>> math53.bessel_j0(10.5)
-0.23664819446234708
>>> math53.bessel_j0(20.9333)
0.04792105881068816
```

29.1.2 Bessel function of the 1st kind, order 1, $J_1(x)$

`math53.`**`bessel_j1`**(x)

where `ctx` is `math53` or `ctxcpp`.

Returns $J_1(x)$, the Bessel function of the 1st kind, order one. See also Wikipedia [1245], MathWorld [874], NIST [438], BoostMath [94], Ehrhardt [295] (3.1.1.1).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.bessel_j1(0.01)
0.004999937500260415
>>> math53.bessel_j1(10.5)
-0.07885001422733144
>>> math53.bessel_j1(20.9333)
0.16884230112872245
```

29.1.3 Bessel function of the 1st kind, integer order n, $J_n(x)$

`math53.`**`bessel_jn`**(n, x)

where `ctx` is `math53` or `ctxcpp`.

Returns $J_n(x)$, the Bessel function of the 1st kind, order n. See also Wikipedia [1245], MathWorld [874], NIST [438], BoostMath [94], Ehrhardt [295] (3.1.1.1).

$$J_n(x) = \left(\tfrac{1}{2}x\right)^n \sum_{k=0}^{\infty} (-1)^k \frac{(x^2/4)^k}{k!\Gamma(n+k+1)}.$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.bessel_jn(2, 0.01)
1.2499895833658854e-05
>>> math53.bessel_jn(3, 10.5)
0.1632801643733625
>>> math53.bessel_jn(4, 20.9333)
-0.01834585303578947
```

29.1.4 Bessel function of the 2nd kind, order $0, Y_0(x)$

`math53.bessel_y0(`x`)`

where `ctx` is `math53` or `ctxcpp`.

Returns $Y_0(x)$, the Bessel function of the 2nd kind, order zero, $x > 0$. See also Wikipedia [1246], MathWorld [875], NIST [439], BoostMath [94], Ehrhardt [295] (3.1.1.1).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.bessel_y0(0.01)
-3.005455637083646
>>> math53.bessel_y0(10.5)
-0.06753037249787641
>>> math53.bessel_y0(20.9333)
0.1676506814275376
```

29.1.5 Bessel function of the 2nd kind, order $1, Y_1(x)$

`math53.bessel_y1(`x`)`

where `ctx` is `math53` or `ctxcpp`.

Returns $Y_1(x)$, the Bessel function of the 2nd kind, order one, $x > 0$. See also Wikipedia [1246], MathWorld [875], NIST [439], BoostMath [94], Ehrhardt [295] (3.1.1.1).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.bessel_y1(0.01)
-63.67859628206066
>>> math53.bessel_y1(10.5)
0.23370422835726862
>>> math53.bessel_y1(20.9333)
-0.04393254669288505
```

29.1.6 Bessel function of the 2nd kind, integer order $n, Y_n(x)$

`math53.bessel_yn(`x`)`

where `ctx` is `math53` or `ctxcpp`.

Returns $Y_n(x)$, the Bessel function of the 2nd kind, order n, $x > 0$. See also Wikipedia [1246], MathWorld [875], NIST [439], BoostMath [94], Ehrhardt [295] (3.1.1.1).

$$Y_n(z) = -\frac{\left(\frac{z}{2}\right)^{-n}}{\pi}\sum_{k=0}^{n-1}\frac{(n-k-1)!}{k!}\left(\frac{z^2}{4}\right)^k + \frac{2}{\pi}J_n(z)\log\frac{z}{2} - \frac{\left(\frac{z}{2}\right)^n}{\pi}\sum_{k=0}^{\infty}(\psi(k+1)+\psi(n+k+1))\frac{\left(-\frac{z^2}{4}\right)^k}{k!(n+k)!}$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.bessel_yn(2, 0.01)
-12732.71380077505
>>> math53.bessel_yn(3, 10.5)
-0.19102024221877467
>>> math53.bessel_yn(4, 20.9333)
0.17502824733280994
```

29.2 Modified Bessel functions of integer order

29.2.1 Modified Bessel function of the 1st kind, order 0, $I_0(x)$

math53.**bessel_i0**(x)

Returns I0(x), the modified Bessel function of the 1st kind, order zero. See also Wikipedia [1259], MathWorld [903], NIST [443], BoostMath [108], Ehrhardt [295] (3.1.2.1).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.bessel_i0(0.01)
1.0000250001562505
>>> math53.bessel_i0(10.5)
4527.441714638888
>>> math53.bessel_i0(20.9333)
108234695.25162585
```

29.2.2 Modified Bessel function of the 1st kind, order 1, $I_1(x)$

math53.**bessel_i1**(x)

Returns I1(x), the modified Bessel function of the 1st kind, order one. See also Wikipedia [1259], MathWorld [903], NIST [443], BoostMath [108], Ehrhardt [295] (3.1.2.3).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.bessel_i1(0.01)
0.005000062500260419
>>> math53.bessel_i1(10.5)
4306.134875096274
>>> math53.bessel_i1(20.9333)
105616995.41931723
```

29.2.3 Modified Bessel function of the 1st kind, integer order n, $I_n(x)$

math53.**bessel_in**(x)

Returns I_n(x), the modified Bessel function of the 1st kind, order n. See also Wikipedia [1259], MathWorld [903], NIST [443], BoostMath [108], Ehrhardt [295] (3.1.2.5).

$$I_\nu(z) = (\tfrac{1}{2}z)^\nu \sum_{k=0}^{\infty} \frac{(\frac{1}{4}z^2)^k}{k!\Gamma(\nu+k+1)}.$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.bessel_in(2, 0.01)
1.2500104166992188e-05
>>> math53.bessel_in(3, 10.5)
2893.8584758757465
>>> math53.bessel_in(4, 20.9333)
73246703.18288033
```

29.2.4 Modified Bessel function of the 2nd kind, order 0, $K_0(x)$

math53.**bessel_k0**(x)

Returns K0(x), the modified Bessel function of the 2nd kind, order zero, x>0. See also Wikipedia [1259], MathWorld [904], NIST [444], BoostMath [108], Ehrhardt [295] (3.1.2.6).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.bessel_k0(0.01)
4.721244730161095
>>> math53.bessel_k0(10.5)
1.0529988143865325e-05
>>> math53.bessel_k0(20.9333)
2.2074463556036048e-10
```

29.2.5 Modified Bessel function of the 2nd kind, order 1, $K_1(x)$

`math53.bessel_k1(`x`)`

Returns K1(x), the modified Bessel function of the 2nd kind, order one, x>0. See also Wikipedia [1259], MathWorld [904], NIST [444], BoostMath [108], Ehrhardt [295] (3.1.2.8).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.bessel_k1(0.01)
99.97389411829626
>>> math53.bessel_k1(10.5)
1.1020472311353894e-05
>>> math53.bessel_k1(20.9333)
2.2595704164348006e-10
```

29.2.6 Modified Bessel function of the 2nd kind, integer order n, $K_n(x)$

`math53.bessel_kn(`x`)`

Returns K_n(x), the modified Bessel function of the 2nd kind, order n, x > 0. See also Wikipedia [1259], MathWorld [904], NIST [444], BoostMath [108], Ehrhardt [295] (3.1.2.10).

$$\begin{aligned} K_n(z) &= \tfrac{1}{2}(\tfrac{1}{2}z)^{-n}\sum_{k=0}^{n-1}\frac{(n-k-1)!}{k!}(-\tfrac{1}{4}z^2)^k + (-1)^{n+1}\log\left(\tfrac{1}{2}z\right)I_n(z) \\ &+ (-1)^n\tfrac{1}{2}(\tfrac{1}{2}z)^n\sum_{k=0}^{\infty}\left(\psi(k+1)+\psi(n+k+1)\right)\frac{(\frac{1}{4}z^2)^k}{k!(n+k)!} \end{aligned} \tag{29.1}$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.bessel_kn(2, 0.01)
19999.50006838941
>>> math53.bessel_kn(3, 10.5)
1.583156782639403e-05
>>> math53.bessel_kn(4, 20.9333)
3.203701460743069e-10
```

29.2.7 Exponentially scaled modified Bessel function of the 1st kind, order 0, $I_{0,e}(x)$

`math53.bessel_i0e(`x`)`

Returns I0(x)*exp(-|x|), the exponentially scaled modified Bessel function of the 1st kind, order zero. See also Wikipedia [1259], MathWorld [903], NIST [443], BoostMath [108], Ehrhardt [295] (3.1.2.2).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.bessel_i0e(0.01)
0.9900745851497076
>>> math53.bessel_i0e(10.5)
0.12466966945908617
>>> math53.bessel_i0e(20.9333)
0.08773034165079278
```

29.2.8 Exponentially scaled modified Bessel function of the 1st kind, order 1, $I_{1,e}(x)$

`math53.bessel_i1e(`x`)`

Returns I1(x)*exp(-|x|), the exponentially scaled modified Bessel function of the 1st kind, order one. See also Wikipedia [1259], MathWorld [903], NIST [443], BoostMath [108], Ehrhardt [295] (3.1.2.4).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.bessel_i1e(0.01)
0.004950311047118277
>>> math53.bessel_i1e(10.5)
0.11857566488126836
>>> math53.bessel_i1e(20.9333)
0.08560854789423662
```

29.2.9 Exponentially scaled modified Bessel function of the 2nd kind, order 0, $K_{0,e}(x)$

`math53.bessel_k0e(`x`)`

Returns K0(x)*exp(x), the exponentially scaled modified Bessel function of the 2nd kind, order zero, x>0. See also Wikipedia [1259], MathWorld [904], NIST [444], BoostMath [108], Ehrhardt [295] (3.1.2.7).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.bessel_k0e(0.01)
4.768694028544461
>>> math53.bessel_k0e(10.5)
0.3824018125983266
>>> math53.bessel_k0e(20.9333)
0.27233711745257894
```

29.2.10 Exponentially scaled modified Bessel function of the 2nd kind, order 1, $K_{1,e}(x)$

`math53.bessel_k1e(`x`)`

Returns K1(x)*exp(x), the exponentially scaled modified Bessel function of the 2nd kind, order one, x>0. See also Wikipedia [1259], MathWorld [904], NIST [444], BoostMath [108], Ehrhardt [295] (3.1.2.9).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.bessel_k1e(0.01)
100.97864845824004
>>> math53.bessel_k1e(10.5)
0.4002139916944334
>>> math53.bessel_k1e(20.9333)
0.2787677681638209
```

29.3 Integrals of zero-order Bessel functions

29.3.1 Integral of J_0

math53.**bessel_j0_int**(x)

Returns the integral $\int_0^x J_0(t)\mathrm{d}t$. See also Wikipedia [1245], MathWorld [874], NIST [438], BoostMath [94], Ehrhardt [295] (3.1.5.2).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.bessel_j0_int(0.01)
0.009999916666979166
>>> math53.bessel_j0_int(10.5)
0.9438066255262282
>>> math53.bessel_j0_int(20.9333)
1.1661904476467662
```

29.3.2 Integral of Y_0

math53.**bessel_y0_int**(x)

Returns the integral $\int_0^x Y_0(t)\mathrm{d}t, \quad x \geq 0$. See also Wikipedia [1246], MathWorld [875], NIST [439], BoostMath [94], Ehrhardt [295] (3.1.5.4).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.bessel_y0_int(0.01)
-0.03642134343346274
>>> math53.bessel_y0_int(10.5)
0.23800420896642513
>>> math53.bessel_y0_int(20.9333)
-0.0517899620038398
```

29.3.3 Integral of I_0

math53.**bessel_i0_int**(x)

Returns the integral $\int_0^x I_0(t)\mathrm{d}t$. See also Wikipedia [1259], MathWorld [903], NIST [443], BoostMath [108], Ehrhardt [295] (3.1.5.1).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.bessel_i0_int(0.01)
0.010000083333645833
>>> math53.bessel_i0_int(10.5)
4794.898946365337
>>> math53.bessel_i0_int(20.9333)
111070471.99595156
```

29.3.4 Integral of K_0

math53.**bessel_k0_int**(x)

Returns the integral $\int_0^x K_0(t)\mathrm{d}t, \quad x \geq 0$. See also Wikipedia [1259], MathWorld [904], NIST [444], BoostMath [108], Ehrhardt [295] (3.1.5.3).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.bessel_k0_int(0.01)
0.057211521554724545
>>> math53.bessel_k0_int(10.5)
1.5707862309450589
>>> math53.bessel_k0_int(20.9333)
1.5707963265790326
```

29.4 Kelvin functions of order 0

29.4.1 Kelvin function $\mathrm{ber}0(x)$

`math53.kelvin_ber0(x)`

Returns the Kelvin function ber. See also Wikipedia [1374], MathWorld [1017], NIST [442], Mpmath [704].

Returns the Kelvin function $\mathrm{ber}_0(x)$, defined as

$$\mathrm{ber}_0(x) = \sum_{k=0}^{\infty} (-1)^k \frac{\left(\frac{1}{4}x^2\right)^{2k}}{((2k)!)^2}.$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.kelvin_ber0(0.01)
0.99999999984375
>>> math53.kelvin_ber0(10.5)
153.76858196600045
>>> math53.kelvin_ber0(20.9333)
-62152.363191785866
```

29.4.2 Kelvin function $\mathrm{bei}0(x)$

`math53.kelvin_bei0(x)`

Returns the Kelvin function bei. See also Wikipedia [1373], MathWorld [1016], NIST [442], Mpmath [703].

Returns the Kelvin function $\mathrm{bei}_0(x)$ is defined as

$$\mathrm{bei}_0(x) = \sum_{k=0}^{\infty} (-1)^k \frac{\left(\frac{1}{4}x^2\right)^{2k+1}}{((2k+1)!)^2}.$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.kelvin_bei0(0.01)
2.4999999999565975e-05
>>> math53.kelvin_bei0(10.5)
140.32375216623805
>>> math53.kelvin_bei0(20.9333)
226472.54726414903
```

29.4.3 Kelvin function $\mathrm{ker}0(x)$

`math53.kelvin_ker0(x)`

Returns the Kelvin function ker. See also Wikipedia [1376], MathWorld [1019], NIST [442], Mpmath [706].

The Kelvin function $\mathrm{ker}_0(x)$ is defined as

$$\mathrm{ker}_0(x) = -\log\left(\tfrac{1}{2}x\right)\mathrm{ber}_0(x) + \tfrac{1}{4}\pi\,\mathrm{bei}_0(x) + \sum_{k=0}^{\infty} (-1)^k \frac{\psi(2k+1)\left(\frac{1}{4}x^2\right)^{2k}}{((2k)!)^2}.$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.kelvin_ker0(0.01)
4.721121335628541
>>> math53.kelvin_ker0(10.5)
1.0187520004406006e-05
>>> math53.kelvin_ker0(20.9333)
-8.840038229293252e-08
```

29.4.4 Kelvin function $\mathrm{kei0}(x)$

math53.**kelvin_kei0**(x)

Returns the Kelvin function kei. See also Wikipedia [1375], MathWorld [1018], NIST [442], Mpmath [705].

The Kelvin function $\mathrm{kei}_0(x)$ is defined as

$$\mathrm{kei}_0(x) = -\log\left(\tfrac{1}{2}x\right)\mathrm{bei}_0(x) - \tfrac{1}{4}\pi\,\mathrm{ber}_0(x) + \sum_{k=0}^{\infty}(-1)^k \frac{\psi(2k+2)\left(\frac{1}{4}x^2\right)^{2k+1}}{((2k+1)!)^2}$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.kelvin_kei0(0.01)
-0.7852551357321914
>>> math53.kelvin_kei0(10.5)
-0.0002285179865986644
>>> math53.kelvin_kei0(20.9333)
-5.029479901091146e-08
```

29.4.5 First derivative of the Kelvin function $\mathrm{ber0}, \mathrm{ber0}'(x)$

math53.**kelvin_ber_prime0**(x)

Returns the Kelvin function ber'(x), x >= 0

See also: Ehrhardt [295] (3.1.8.8).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.kelvin_ber_prime0(0.01)
-6.249999999945747e-08
>>> math53.kelvin_ber_prime0(10.5)
1.9344188906856528
>>> math53.kelvin_ber_prime0(20.9333)
-202640.54055889626
```

29.4.6 First derivative of the Kelvin function $\mathrm{bei0}, \mathrm{bei0}'(x)$

math53.**kelvin_bei_prime0**(x)

Returns the Kelvin function bei'(x), x >= 0

See also: Ehrhardt [295] (3.1.8.9).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.kelvin_bei_prime0(0.01)
0.004999999999739583
>>> math53.kelvin_bei_prime0(10.5)
201.30360248165368
```

(continues on next page)

(continued from previous page)

```
>>> math53.kelvin_bei_prime0(20.9333)
110723.61094753428
```

29.4.7 First derivative of the Kelvin function $\mathrm{ker}0, \mathrm{ker}0'(\nu, x)$

math53.**kelvin_ker_prime0**(x)

Returns the Kelvin function ker'(x), x > 0

See also: Ehrhardt [295] (3.1.8.10).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.kelvin_ker_prime0(0.01)
-99.99607338237708
>>> math53.kelvin_ker_prime0(10.5)
-0.00016942836391713252
>>> math53.kelvin_ker_prime0(20.9333)
2.902892305874749e-08
```

29.4.8 First derivative of the Kelvin function $\mathrm{kei}0, \mathrm{kei}0'(x)$

math53.**kelvin_kei_prime0**(x)

Returns the Kelvin function kei'(x), x >= 0

See also: Ehrhardt [295] (3.1.8.11).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.kelvin_kei_prime0(0.01)
0.02610555759395425
>>> math53.kelvin_kei_prime0(10.5)
0.0001650763656284745
>>> math53.kelvin_kei_prime0(20.9333)
9.928019000907199e-08
```

29.5 Synchrotron functions

29.5.1 First synchrotron function $F(x)$

math53.**synchrotron_f**(x)

Returns the first synchrotron function $F(x)$ for $x \geq 0$, $F(x) = x \int_x^\infty K_{5/3}(t)\mathrm{d}t$.

See also: Ehrhardt [295] (3.1.11.1).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.synchrotron_f(0.01)
0.4449725041142106
>>> math53.synchrotron_f(10.5)
0.00011914762875805393
>>> math53.synchrotron_f(20.9333)
4.808211886821304e-09
```

29.5.2 Second synchrotron function $G(x)$

math53.**synchrotron_g**(x)

Returns the second synchrotron function $G(x) = xK_{2/3}(x)$ for $x \geq 0$.

See also: Ehrhardt [295] (3.1.11.2).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.synchrotron_g(0.01)
0.2309807734222628
>>> math53.synchrotron_g(10.5)
0.0001128256550353819
>>> math53.synchrotron_g(20.9333)
4.669098611060105e-09
```

CHAPTER

THIRTY

REAL FUNCTIONS RELATED TO ${}_1F_1$

30.1 Incomplete gamma functions

30.1.1 Tricomi's entire incomplete gamma function: $\gamma^*(a, x)$

`math53.gamma_tricomi(`a, z`)`

Returns Tricomi's entire incomplete gamma function $\gamma^*(a, x)$.

See also: Flint [737], Flint [727].

This routine returns Tricomi's incomplete gamma function γ^*, defined as

$$\gamma^*(a, x) = e^{-x} \frac{M(1, a + 1, x)}{\Gamma(a + 1)}$$

Special cases are $\gamma^*(0, x) = 1, \gamma^*(a, 0) = 1/\Gamma(a + 1)$, and $\gamma^*(-n, x) = x^n$, if $-n$ is a negative integer. Otherwise there are the following relations to the other incomplete functions:

$$\gamma^*(a, x) = \frac{x^{-a}}{\Gamma(a)} \gamma(a, x) = x^{-a} P(a, x).$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.gamma_tricomi(1.2, -4.333)
17.84105392965348
>>> math53.gamma_tricomi(2.4, 0.0)
0.33543467201965116
>>> math53.gamma_tricomi(4.8, 4.333)
0.00041567540877246445
```

30.1.2 Truncated exponential function, $e_n(x)$

`math53.expn(`n, x`)`

Returns $e_n(x) = \sum_{k=0}^{n} \frac{x^k}{k!} = \frac{\Gamma(n + 1, x)}{\Gamma(n + 1)} e^x$, the truncated exponential sum function, for $n > 0$.

See also: Ehrhardt [295] (3.10.25).

https://mathworld.wolfram.com/ExponentialSumFunction.html

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.expn(2, -4.333)
6.054444500000001
>>> math53.expn(3, 0.0)
1.0
>>> math53.expn(4, 4.333)
42.9663958795967
```

30.1.3 Relative exponential, $\mathrm{exprel}_n(x)$

`math53.`**`expreln`**(n, x)

Returns $\mathrm{exprel}_n(x) = \dfrac{n!}{x^n}\left(e^x - \sum_{k=0}^{n-1}\dfrac{x^k}{k!}\right) = e^x x^{-n}\left(\Gamma(1+n) - n\Gamma(n,x)\right) = {}_1F_1(1, 1+n, x).$

See also Ehrhardt [295] (3.10.10).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.expreln(2, -4.333)
0.35644717836066736
>>> math53.expreln(3, 0.0)
1.0
>>> math53.expreln(4, 4.333)
3.2608612360022433
```

30.2 Coulomb wave functions

30.2.1 Normalizing Gamow constant for Coulomb wave functions

math53.**coulomb_cl**(*l*, *eta*)

Returns the normalizing Gamow constant for Coulomb wave functions. See also Wikipedia [1361], MathWorld [1024], NIST [778], Thompson and Barnett [779], Michel [412], Ehrhardt [295] (3.1.10.1), Mpmath [713].

Gives the normalizing Gamow constant for Coulomb wave functions,

$$C_l(\eta) = 2^l \exp\left(-\pi\eta/2 + [\log\Gamma(1+l+i\eta) + \log\Gamma(1+l-i\eta)]/2 - \log\Gamma(2l+2)\right),$$

where the log gamma function with continuous imaginary part away from the negative half axis is implied.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.coulomb_cl(2, -4.333)
3.69103518943773
>>> math53.coulomb_cl(3, 0.0)
0.009523809523809523
>>> math53.coulomb_cl(4, 4.333)
1.8588429181136979e-07
```

30.2.2 Coulomb phase shift $\sigma_L(\eta)$

math53.**coulomb_sl**(*L*, *eta*)

Returns the Coulomb phase shift for Coulomb wave functions.

See also: Ehrhardt [295] (3.1.10.2).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.coulomb_sl(2, -4.333)
-5.268776330468265
>>> math53.coulomb_sl(3, 0.0)
0.0
>>> math53.coulomb_sl(4, 4.333)
7.059330502056313
```

30.2.3 Regular Coulomb wave functions $F_l(\eta, x), F_l'(\eta, x)$

math53.**coulomb_f_fprime**(*L*, *eta*, *x*)

Returns simultaneously the regular Coulomb wave function $F_l(\eta, x)$, and its first derivative, $F_l'(\eta, x)$.

See also Wikipedia [1361], MathWorld [1024], NIST [778], Ehrhardt [295] (3.1.10.3), Flint [767], Flint [760], Mpmath [710].

An example in Python

```
>>> from xlcalcnet import math53
>>> print(math53.coulomb_f_fprime(2, -4.333, 4.333))
(0.682089111804269, 0.645302191673521)
>>> print(math53.coulomb_f_fprime(3, 0.0, 4.333))
(1.04051906190237, 0.316468713579997)
>>> print(math53.coulomb_f_fprime(4, 4.333, -4.333))
(0, 0)
```

30.2.4 Irregular Coulomb wave functions $G_l(\eta, x), G'_l(\eta, x)$

math53.**coulomb_g_gprime**(*L*, *eta*, *x*)

Returns simultaneously the irregular Coulomb wave function $G_l(\eta, x)$, and its first derivative, $G'_l(\eta, x)$.

See also Wikipedia [1361], MathWorld [1024], NIST [778], Ehrhardt [295] (3.1.10.5), Mpmath [711].

An example in Python

```
>>> from xlcalcnet import math53
>>> print(math53.coulomb_g_gprime(2, -4.333, 4.333))
(0.38242285077798, -1.10428635087651)
>>> print(math53.coulomb_g_gprime(3, 0.0, 4.333))
(0.631311726911029, -0.769048467457657)
>>> print(math53.coulomb_g_gprime(4, 4.333, -4.333))
(0, 0)
```

30.3 Error function, and related functions

30.3.1 Exponentially scaled complementary error function, $\mathrm{erfcx}(x)$

math53.**erfcx**(x)

Returns the exponentially scaled complementary error function $\mathrm{erfcx}(z) = \exp(z^2) \cdot \mathrm{erfc}(z) = w(iz)$. See also Ehrhardt [295] (3.3.6).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.erfcx(-4.333)
285010386.1254641
>>> math53.erfcx(0.0)
1.0
>>> math53.erfcx(4.333)
0.12698575347883756
```

30.3.2 Difference of error functions, $\mathrm{erfh}(x, h) = \mathrm{erf}(x + h) - \mathrm{erf}(x - h)$

math53.**erfh**(x, h)

Returns the difference of error functions $\mathrm{erfh}(x, h) = \mathrm{erf}(x + h) - \mathrm{erf}(x - h) = \mathrm{erfc}(x - h) - \mathrm{erfc}(x + h)$.

See also Ehrhardt [295] (3.3.9).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.erfh(-4.333, -4.3)
-0.9627769999250788
>>> math53.erfh(0.0, 0.1)
0.2249258320365698
>>> math53.erfh(4.333, 4.3)
0.9627769999250788
```

30.3.3 Difference of error functions, $\mathrm{erf2}(x_1, x_2) = \mathrm{erf}(x_2) - \mathrm{erf}(x_1)$

math53.**erf2**($x1$, $x2$)

Returns the difference of error functions $\mathrm{erf2}(x_1, x_2) = \mathrm{erf}(x_2) - \mathrm{erf}(x_1) = \mathrm{erfh}\left(\frac{1}{2}(x_2 + x_1), \frac{1}{2}(x_2 - x_1)\right)$.

See also Ehrhardt [295] (3.3.10).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.erf2(-4.333, -4.3)
3.023761733234312e-10
>>> math53.erf2(0.0, 0.1)
0.1124629160182849
>>> math53.erf2(4.333, 4.3)
-3.023761733234312e-10
```

30.3.4 Probability function $Q(x) = \Phi(-x)$

math53.**erfq**(x)

Returns the integral $Q(x) = \Phi(-x) = \dfrac{1}{\sqrt{2\pi}} \displaystyle\int_x^\infty \exp(-t^2)\,\mathrm{d}t = P(-x)$.

See also: Ehrhardt [295] (3.3.12.2).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.erfq(-4.333)
0.999992645444505
>>> math53.erfq(0.0)
0.5
>>> math53.erfq(4.333)
7.3545554950826356e-06
```

30.3.5 Inverse of the exponentially scaled complementary error function, $\mathrm{erfcx}^{-1}(x)$

math53.erfcx_inv(x)

Returns $\mathrm{erfcx}^{-1}(x)$, the functional inverse of erfcx, satisfying $\mathrm{erfcx}(\mathrm{erfcx}^{-1}(x)) = x$, for $0 \leq x \leq \infty$.

See also Ehrhardt [295] (3.3.11.3).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.erfcx_inv(0.133)
4.12712473131774
>>> math53.erfcx_inv(0.210)
2.51088550998549
>>> math53.erfcx_inv(4.333)
-0.9333744710363929
```

30.3.6 Inverse of the imaginary error function, $\mathrm{erfi}^{-1}(x)$

math53.erfi_inv(x)

Returns $\mathrm{erfi}^{-1}(x)$, the functional inverse of erfi, satisfying $\mathrm{erfi}(\mathrm{erfi}^{-1}(x)) = x$.

See also Ehrhardt [295] (3.3.11.4).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.erfi_inv(0.133)
0.11732758262007195
>>> math53.erfi_inv(0.210)
0.18400956197700832
>>> math53.erfi_inv(4.333)
1.475620575243282
```

30.3.7 Generalized Dawson integral, $F(p, x)$

math53.dawson2(p, x)

Returns the generalized Dawson integral $F(p, x) = e^{-x^p} \int_0^x e^{t^p} \mathrm{d}t, p \geq 0, x \geq 0$. See also Ehrhardt [295] (3.3.2).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.dawson2(0.133, 0.2)
0.18253875263386812
>>> math53.dawson2(0.20, 1.2)
1.0197368694644748
>>> math53.dawson2(4.333, 4.3)
0.0017883958128242687
```

30.3.8 Generalized error function, $\mathrm{erfg}(p, x)$

`math53.erfg(p, x)`

Returns the generalized error function $\mathrm{erfg}(p,x) = \int_0^x e^{-t^p}\mathrm{d}t = \frac{1}{p}\gamma\left(\frac{1}{p}, x^p\right)$, where $\gamma(\cdot)$ denotes the non-normalised lower incomplete gamma function. See also Ehrhardt [295] (3.3.4).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.erfg(0.133, 0.2)
0.0984423713670484
>>> math53.erfg(0.20, 1.2)
0.5113754785616778
>>> math53.erfg(4.333, 4.3)
0.9105748355517699
```

30.3.9 Expint3, $\mathrm{erfg}(3, x)$

`math53.expint3(x)`

Returns $\mathrm{expint3}(p,x) = \mathrm{erfg}(3,x) = \int_0^x e^{-t^3}\mathrm{d}t = \frac{1}{3}\gamma\left(\frac{1}{3}, x^3\right)$, where $\gamma(\cdot)$ denotes the non-normalised lower incomplete gamma function. See also Ehrhardt [295] (3.3.13).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.expint3(0.333)
0.32995806253817933
>>> math53.expint3(2.1)
0.8929727701083042
>>> math53.expint3(4.333)
0.8929795115692493
```

30.3.10 Scaled repeated integrals of the complementary error function, $i^n\mathrm{erfc}(x)$

`math53.inerfc(n, x)`

Returns the scaled repeated integrals of the complementary error function, defined for $n \geq -1$ using the awkward but standard notation

$$i^n\mathrm{erfc}(x) = \int_x^\infty \mathrm{erfc}(t)\,\mathrm{d}t = \frac{2}{\sqrt{\pi}}\int_x^\infty \frac{(t-x)^n}{n!}e^{-t^2}\,\mathrm{d}t, \quad (n = 0, 1, 2, ...).$$

See also Ehrhardt [295] (3.3.7), NIST [435] (eq. 7.18.10), MathWorld [972].

These functions compute the scaled repeated integrals of complementary error function, defined for $n \geq -1$ using the awkward but standard notation

$$i^n\mathrm{erfc}(x) = \int_x^\infty i^{n-1}\mathrm{erfc}(t)\mathrm{d}t = \frac{2}{\sqrt{\pi}}\int_x^\infty \frac{(t-x)^n}{n!}e^{-t^2}\mathrm{d}t, \quad (n = 0, 1, 2, \ldots)$$

$$i^{-1}\mathrm{erfc}(x) = \frac{2}{\sqrt{\pi}}e^{-x^2}, \quad i^0\mathrm{erfc}(x) = \mathrm{erfc}(x).$$

$$i^n\mathrm{erfc}(x) = -\frac{z}{n}i^{n-1}\mathrm{erfc}(x) + \frac{1}{2n}i^{n-2}\mathrm{erfc}(x.$$

We also have

$$i^n\mathrm{erfc}(x) = \frac{e^{-z^2}}{2^n\sqrt{\pi}}U\left(\tfrac{1}{2}n + \tfrac{1}{2}, \tfrac{1}{2}, z^2\right)$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.inerfc(2, -4.3)
18.98999999998569
>>> math53.inerfc(3, 0.01)
0.09156879696249248
>>> math53.inerfc(4, 4.3)
1.6897530115750235e-05
```

30.3.11 Fresnel auxiliary function $\mathrm{f}(x)$

`math53.`**`fresnel_f`**`(`x`)`

Returns the Fresnel auxiliary function $\mathrm{f}\left(x\right) = \left(\frac{1}{2} - S\left(x\right)\right)\cos\left(\frac{1}{2}\pi x^2\right) - \left(\frac{1}{2} - C\left(x\right)\right)\sin\left(\frac{1}{2}\pi x^2\right)$.

See also Wikipedia [1317], MathWorld [975], NIST [773], Ehrhardt [295] (3.3.15).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.fresnel_f(-4.333)
0.5184512886301054
>>> math53.fresnel_f(0.0)
0.5
>>> math53.fresnel_f(4.333)
0.0733990512696557
```

30.3.12 Fresnel auxiliary function $\mathrm{g}(x)$

`math53.`**`fresnel_g`**`(`x`)`

Returns the Fresnel auxiliary function $\mathrm{g}\left(x\right) = \left(\frac{1}{2} - C\left(x\right)\right)\cos\left(\frac{1}{2}\pi x^2\right) + \left(\frac{1}{2} - S\left(x\right)\right)\sin\left(\frac{1}{2}\pi x^2\right)$.

See also Wikipedia [1317], MathWorld [975], NIST [773], Ehrhardt [295] (3.3.15).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.fresnel_g(-4.333)
-1.2856518027760035
>>> math53.fresnel_g(0.0)
0.5
>>> math53.fresnel_g(4.333)
0.0012401961792171978
```

30.3.13 Goodwin-Staton integral, $G(x)$

`math53.`**`goodwin_staton`**`(`x`)`

Returns the Goodwin-Staton integral $G(x) = \int_0^\infty \frac{e^{-t^2}}{t+x}\,\mathrm{d}t = \sqrt{\pi}F(x) - \frac{1}{2}e^{-x^2}\,\mathrm{Ei}(x^2), \quad x \neq 0.$

See also Wikipedia [1318], NIST [434], Ehrhardt [295] (3.3.16).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.goodwin_staton(-4.333)
-0.2387165659508476
>>> math53.goodwin_staton(0.1)
2.1650436618898743
>>> math53.goodwin_staton(4.333)
0.18225199823760455
```

30.3.14 Voigt function U

math53.**voigt_u**(x, t)

Returns the Voigt function U. See also Wikipedia [1331], NIST [437].

The Voigt functions[1] U, V, and H (sometimes called the line broadening function) are defined by

$$U(x,t) + iV(x,t) = \sqrt{\frac{\pi}{4t}} e^{z^2} \operatorname{erfc}(z) = \sqrt{\frac{\pi}{4t}} w(iz),$$

$$H(a,u) = \frac{U(u/a, 1/4a^2)}{a\sqrt{\pi}},$$

where

$$z = (1 - ix)/2\sqrt{t},$$

erfc is the complementary error function, and w(z) is the Faddeeva function.

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.voigt_u(-4.333, 0.13)
0.05254336595640464
>>> math53.voigt_u(0.0, 0.21)
0.7811438005184261
>>> math53.voigt_u(4.333, 4.3)
0.1490998347762494
```

30.3.15 Voigt function V

math53.**voigt_v**(x, t)

Returns the Voigt function V. See also Wikipedia [1331], NIST [437].

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.voigt_v(-4.333, 0.13)
-0.22146326272595282
>>> math53.voigt_v(0.0, 0.21)
0.0
>>> math53.voigt_v(4.333, 4.3)
0.19560699319119224
```

30.3.16 Voigt function H

math53.**voigt_h**(a, u)

Returns the Voigt function H. See also Wikipedia [1331], NIST [437].

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.voigt_h(-4.333, 0.13)
-0.1268843321935899
>>> math53.voigt_h(0.1, 0.21)
0.861821897691752
>>> math53.voigt_h(4.333, 4.3)
0.06643025352849169
```

30.3.17 Voigt Profile distribution, pdf

math53.**voigt_profile_pdf**(*x*, *sigma*, *gamma*)

Returns pdf(x), the probability density function of a random variable X, following a Voigt Profile distribution with shape $sigma > 0$, scale $gamma > 0$, and the support interval $(0, +\infty)$. See also Wikipedia [1215].

$$\text{pdf}(x) = V(x; \sigma, \gamma) = \frac{\Re[w(z)]}{\sigma\sqrt{2\pi}}, \quad \text{where } z = \frac{x + i\gamma}{\sigma\sqrt{\pi}}.$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.voigt_profile_pdf(-4.333, 0.13, 1.13)
0.022564184036184317
>>> math53.voigt_profile_pdf(0.0, 0.21, 1.21)
0.31591913104142727
>>> math53.voigt_profile_pdf(4.333, 4.3, 14.3)
0.023604268551340794
```

30.4 Exponential integrals, and related functions

30.4.1 Entire cosine integral $\mathrm{Cin}(x)$

`math53.cin(z)`

Returns the entire cosine integral of $\mathrm{Cin}(x) = \int_0^x \frac{1-\cos(t)}{t}\,\mathrm{d}t$.

See also Wikipedia [1314], MathWorld [967], NIST [777], Ehrhardt [295] (3.4.3).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.cin(-4.333)
2.2259335713533317
>>> math53.cin(0.0)
0.0
>>> math53.cin(4.333)
2.2259335713533317
```

30.4.2 Entire hyperbolic cosine integral $\mathrm{Cinh}(x)$

`math53.cinh(z)`

Returns the entire hyperbolic cosine integral $\mathrm{Cinh}(x) = \int_0^x \frac{\cosh(t)-1}{t}\,\mathrm{d}t$.

See also Wikipedia [1320], MathWorld [979], NIST [774], Ehrhardt [295] (3.4.4).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.cinh(-4.333)
10.3553644776616
>>> math53.cinh(0.0)
0.0
>>> math53.cinh(4.333)
10.3553644776616
```

30.4.3 Entire exponential integral $\mathrm{Ein}(x)$

`math53.ein(x)`

Returns the entire exponential integral $\mathrm{Ein}(x) = -\int_0^x \frac{1-e^{-t}}{t}\,\mathrm{d}t$.

See also Wikipedia [1320], MathWorld [979], NIST [774], Ehrhardt [295] (3.4.11).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.ein(-4.333)
-22.756735632456937
>>> math53.ein(0.0)
0.0
>>> math53.ein(4.333)
2.046006677133737
```

30.4.4 Scaled exponential integral $\mathrm{e1s}(x)$

math53.**exp_integral_e1_scaled**(z)

Returns the scaled exponential integral $\mathrm{e1s}(x) = e^{-x}E_1(x)$ for $x \neq 0$.

See also Wikipedia [1315], MathWorld [973], NIST [772], BoostMath [154], Ehrhardt [295] (3.4.6).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.exp_integral_e1_scaled(-4.333)
-24.800211440116243
>>> math53.exp_integral_e1_scaled(0.1)
1.8229239584193906
>>> math53.exp_integral_e1_scaled(4.333)
0.002530869474431569
```

30.4.5 Scaled exponential integral $\mathrm{eis}(x)$

math53.**exp_integral_ei_scaled**(x)

Returns the scaled exponential integral $\mathrm{eis}(x) = e^{-x}\mathrm{Ei}(x)$ for $x \neq 0$.

See also Wikipedia [1315], MathWorld [973], NIST [772], BoostMath [154], Ehrhardt [295] (3.4.8).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.exp_integral_ei_scaled(-4.333)
-0.19278255765376273
>>> math53.exp_integral_ei_scaled(0.1)
-1.46838175654763
>>> math53.exp_integral_ei_scaled(4.333)
0.3255797560584637
```

30.4.6 Scaled exponential integral $\mathrm{eisx2}(x)$

math53.**eisx2**(x)

Returns the scaled exponential integral $\mathrm{eisx2}(x) = e^{-x^2}\mathrm{Ei}(x^2)$ for $x \neq 0$.

See also Wikipedia [1315], MathWorld [973], NIST [772], BoostMath [154], Ehrhardt [295] (3.4.9).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.eisx2(-4.333)
0.056464567713243055
>>> math53.eisx2(0.1)
-3.977950399261558
>>> math53.eisx2(4.333)
0.056464567713243055
```

30.4.7 Inverse of the exponential integral, $\mathrm{Ei}^{-1}(x)$

math53.**ei_inv**(x)

Returns $\mathrm{Ei}^{-1}(x) = \log(\mathrm{li}^{-1}(x))$, the functional inverse of the exponential integral, i.e. $\mathrm{Ei}(\mathrm{Ei}^{-1}(x)) = x$.

See also Wikipedia [1315], MathWorld [973], NIST [772], BoostMath [154], Ehrhardt [295] (3.4.10).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.ei_inv(-4.333)
0.056464567713243055
>>> math53.ei_inv(0.1)
0.39872353634725033
>>> math53.ei_inv(4.333)
1.8245993296832108
```

30.4.8 Generalized exponential integral $E_p(p, x)$

`math53.gei`(p, x)

Returns the generalized exponential integral of real order $E_p(x) = \int_1^\infty \frac{e^{-xt}}{t^p}\,\mathrm{d}t = x^{p-1}\Gamma(1-p,x) = x^{p-1}Q(1-p,x)\Gamma(1-p)$.

See also Wikipedia [1315], MathWorld [974], NIST [460], BoostMath [155], Ehrhardt [295] (3.4.13).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.gei(-4.333, 0.333)
14126.353468990947
>>> math53.gei(0.1, 2.1)
0.05633928555021888
>>> math53.gei(4.333, 4.333)
0.0015971422905912734
```

30.4.9 Exponential integral $\beta_n(x)$

`math53.eibeta`(n, x)

Returns the exponential integral $\beta_n(x) = \int_1^1 t^n e^{-xt}\,\mathrm{d}t = x^{-n-1}\left(\Gamma(n+1,-x) - \Gamma(n+1,x)\right), n \geq 0$.

See also Abramowitz and Stegun. [4] (5.1.6) and (5.1.47), and Ehrhardt [295] (3.4.14).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.eibeta(2, 0.333)
0.6889912735534381
>>> math53.eibeta(3, 2.1)
-1.3634776730533458
>>> math53.eibeta(4, 4.333)
8.588862944132174
```

30.4.10 Inverse of the logarithmic integral, $\mathrm{li}^{-1}(x)$

`math53.log_integral_inv`(x)

Returns $\mathrm{li}^{-1}(x)$, the functional inverse of the logarithmic integral, i.e. $\mathrm{li}(\mathrm{li}^{-1}(x)) = x$.

See also Wikipedia [1324], MathWorld [984], NIST [775], Ehrhardt [295] (3.4.16).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.log_integral_inv(-4.333)
1.0073438990424428
>>> math53.log_integral_inv(0.1)
1.4899216524808407
```

(continues on next page)

(continued from previous page)

```
>>> math53.log_integral_inv(4.333)
6.2003102410812225
```

30.4.11 Shifted sine integral $\mathrm{si}(x) = \mathrm{Si}(x) - \pi/2$

math53.**shifted_sin_integral**(x)

Returns the shifted sine integral, $\mathrm{si}(x) = \mathrm{Si}(x) - \pi/2$.

See also Wikipedia [1329], MathWorld [986], NIST [777], Ehrhardt [295] (3.4.19).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.shifted_sin_integral(-4.333)
-3.2610627580571516
>>> math53.shifted_sin_integral(0.1)
-1.4708518656866196
>>> math53.shifted_sin_integral(4.333)
0.11947010446735848
```

30.5 Struve functions

30.5.1 Struve function $\mathrm{H}_0(x)$

math53.**struve_h0**(x)

Returns the Struve function $H_0(x)$

See also: Ehrhardt [295] (3.1.9.1), Mpmath [708].

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.struve_h0(-4.333)
-8.838923360249138e-05
>>> math53.struve_h0(0.0)
0.0
>>> math53.struve_h0(4.333)
8.838923360249138e-05
```

30.5.2 Struve function $\mathrm{H}_1(x)$

math53.**struve_h1**(x)

Returns the Struve function $H_1(x)$

See also: Ehrhardt [295] (3.1.9.2), Mpmath [708].

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.struve_h1(-4.333)
1.0083112254111042
>>> math53.struve_h1(0.0)
0.0
>>> math53.struve_h1(4.333)
1.0083112254111042
```

30.5.3 Struve function $\mathrm{L}_0(x)$

math53.**struve_l0**(x)

Returns the Struve function $L_0(x)$

See also: Ehrhardt [295] (3.1.9.5).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.struve_l0(-4.333)
-14.940909724356144
>>> math53.struve_l0(0.0)
0.0
>>> math53.struve_l0(4.333)
14.940909724356144
```

30.5.4 Struve function $\mathrm{L}_1(x)$

math53.**struve_l1**(x)

Returns the Struve function $\mathbf{L}_1(x)$

See also: Ehrhardt [295] (3.1.9.6).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.struve_l1(-4.333)
12.616306710713864
>>> math53.struve_l1(0.0)
0.0
>>> math53.struve_l1(4.333)
12.616306710713864
```

CHAPTER

THIRTYONE

REAL AND COMPLEX FUNCTIONS

31.1 Additional elementary complex functions

31.1.1 Auxiliary function $\sqrt{1-z^2}$

cmath53.**sqrt1mz2**(z)

Returns the square root of $1-z^2$. For very large z (when z^2 would overflow) we have $\sqrt{1-z^2} = \pm iz$, where the sign is chosen to make $\Re\sqrt{1-z^2} \geq 0$; otherwise the result is computed from the definition.

See also Wikipedia [1228], MathWorld [838], BoostMath [97].

An example in Python, real input:

```
>>> from xlcalcnet import cmath53
>>> print(cmath53.sqrt1mz2(-4.333))
(0, 4.21602763273677)
>>> print(cmath53.sqrt1mz2(0.0))
(1, 0)
>>> print(cmath53.sqrt1mz2(4.333))
(0, 4.21602763273677)
```

An example in Python, complex input:

```
>>> from xlcalcnet import cmath53
>>> print(cmath53.sqrt1mz2(-4.333 + 2j))
(2.04503636378806, 4.23757745996643)
>>> print(cmath53.sqrt1mz2(0.0 + 2j))
0.0
>>> print(cmath53.sqrt1mz2(4.333 + 2j))
(2.04503636378806, -4.23757745996643)
```

31.1.2 Cube root, $\mathrm{cuberoot}(x) = \sqrt[3]{x} = y$, with $\arg(y)$ closest to $\arg(x)$

cmath53.**cuberoot**(z)

Returns the cube root of x, $x^{1/3}$ in a way which gives a negative number for negative input. See also Wikipedia [1228], MathWorld [838], BoostMath [97].

An example in Python, real input:

```
>>> from xlcalcnet import cmath53
>>> print(cmath53.cuberoot(-4.333))
(-1.63028261124085, 0)
>>> print(cmath53.cuberoot(0.0))
(0, 0)
>>> print(cmath53.cuberoot(4.333))
(1.63028261124085, 0)
```

An example in Python, complex input:

```
>>> from xlcalcnet import cmath53
>>> print(cmath53.cuberoot(-4.333 + 2j))
(-1.66615392003231, 0.24184624308246)
>>> print(cmath53.cuberoot(0.0 + 2j))
(1.09112363597172, 0.629960524947436)
>>> print(cmath53.cuberoot(4.333 + 2j))
(1.66615392003231, 0.24184624308246)
```

31.1.3 Nth root, $\mathrm{surd}(x, n) = \sqrt[n]{x} = y$, with $\arg(y)$ closest to $\arg(x)$

`cmathc53.surd`(x, n)

Returns the complex nth root $w = z^{1/n}$ with arg(w) closest to arg(z), e.g. surd(-8, 3) = -2 or surd(i, 5) = i, compared to the cnroot results $\sqrt[3]{-8} = 1 + i\sqrt{3}$ and $\sqrt[5]{i} = \cos(\pi/10) + i\sin(\pi/10)$. See Ehrhardt [295] (4.2.60).

An example in Python, real input:

```
>>> from xlcalcnet import cmath53
>>> print(cmath53.surd(-4.333, 2))
(0, 2.08158593384948)
>>> print(cmath53.surd(0.0, 3))
(0, 0)
>>> print(cmath53.surd(4.333, 4))
(1.44277022905571, 0)
```

An example in Python, complex input:

```
>>> from xlcalcnet import cmath53
>>> print(cmath53.surd(-4.333 + 2j, 2))
(0.468670657289459, 2.13369449195618)
>>> print(cmath53.surd(0.0 + 2j, 3))
(1.09112363597172, 0.629960524947436)
>>> print(cmath53.surd(4.333 + 2j, 4))
(1.46939697568672, 0.159477209033463)
```

31.1.4 Continuous inverse cotangent, $\mathrm{acotc}(x)$

`ctx.acotc`(x)

where `ctx` is `math53`, or `cmathc53`.

Returns the continuous inverse cotangent of x, $\mathrm{acotc}(x) = \pi/2 - \mathrm{atan}(x)$. See also Wikipedia [1255], MathWorld [865], NIST [485], Mpmath [567].

An example in Python, real input:

```
>>> from xlcalcnet import math53
>>> math53.acotc(-4.333)
2.9147769503723295
>>> math53.acotc(0.0)
1.5707963267948966
>>> math53.acotc(4.333)
0.2268157032174636
```

An example in Python, complex input:

```
>>> from xlcalcnet import cmath53
>>> print(cmath53.acotc(-4.333 + 2j))
(2.95221017246, -0.0849298596570046)
>>> print(cmath53.acotc(0.0 + 2j))
(0, -0.549306144334055)
```

(continues on next page)

(continued from previous page)

```
>>> print(cmath53.acotc(4.333 + 2j))
(0.189382481129794, -0.0849298596570046)
```

31.1.5 Continuous inverse hyperbolic cotangent, $\mathrm{acothc}(x)$

cmathc53.**acothc**(x)

Returns the continuous inverse hyperbolic cotangent of x, $\mathrm{acothc}(x) = \pi/2 - \mathrm{atanh}(x) + i \cdot \pi/2$. See also Wikipedia [1255], MathWorld [865], NIST [485], Mpmath [567].

An example in Python, real input:

```
>>> from xlcalcnet import cmath53
>>> print(cmath53.acothc(-4.333))
(-0.235020566146431, 3.14159265358979)
>>> print(cmath53.acothc(0.0))
(0, 1.5707963267949)
>>> print(cmath53.acothc(4.333))
(0.235020566146431, 0)
```

An example in Python, complex input:

```
>>> from xlcalcnet import cmath53
>>> print(cmath53.acothc(-4.333 + 2j))
(-0.191034096798641, 3.05075645267977)
>>> print(cmath53.acothc(0.0 + 2j))
(0, 2.67794504458899)
>>> print(cmath53.acothc(4.333 + 2j))
(0.191034096798641, 3.05075645267977)
```

31.2 Weierstrass elliptic functions, in terms of (real) lattice invariants g_2, g_3

The Weierstrass functions take real values on the real axis iff the lattice is fixed under complex conjugation, or, equivalently, when $g_2, g_3 \in \mathbb{R}$.

31.2.1 Weierstrass function $\wp_g(z, g_2, g_3)$

`ctx.weierstrass_pg`(*z*, *g2*, *g3*)

where `ctx` is `math53`, or `cmathc53`.

Returns the Weierstrass function $\wp_g(x, g_2, g_3)$ based on the lattice invariants g_2, g_3.

See also Wikipedia [1349], MathWorld [987], Ehrhardt [295] (3.2.17.5).

An example in Python, real input:

```
>>> from xlcalcnet import math53
>>> math53.weierstrass_pg(-4.333, 10, 1.333)
13.66531644861815
>>> math53.weierstrass_pg(0.1, 20.0, 2.0)
100.01000747639043
>>> math53.weierstrass_pg(4.333, 34.0, 4.333)
23.029224134567052
```

An example in Python, complex input:

```
>>> from xlcalcnet import cmath53
>>> print(cmath53.weierstrass_pg(-4.333 + 2j, 10 + 2j, 1.333 + 2j))
(-0.773959377143707, -2.75887336080179)
>>> print(cmath53.weierstrass_pg(0.1 + 2j, 20.0 + 2j, 2.0 + 2j))
(-14.0272474577254, -12.142040527299)
>>> print(cmath53.weierstrass_pg(4.333 + 2j, 34.0 + 2j, 4.333 + 2j))
(-2.53556102759659, 1.72556229967144)
```

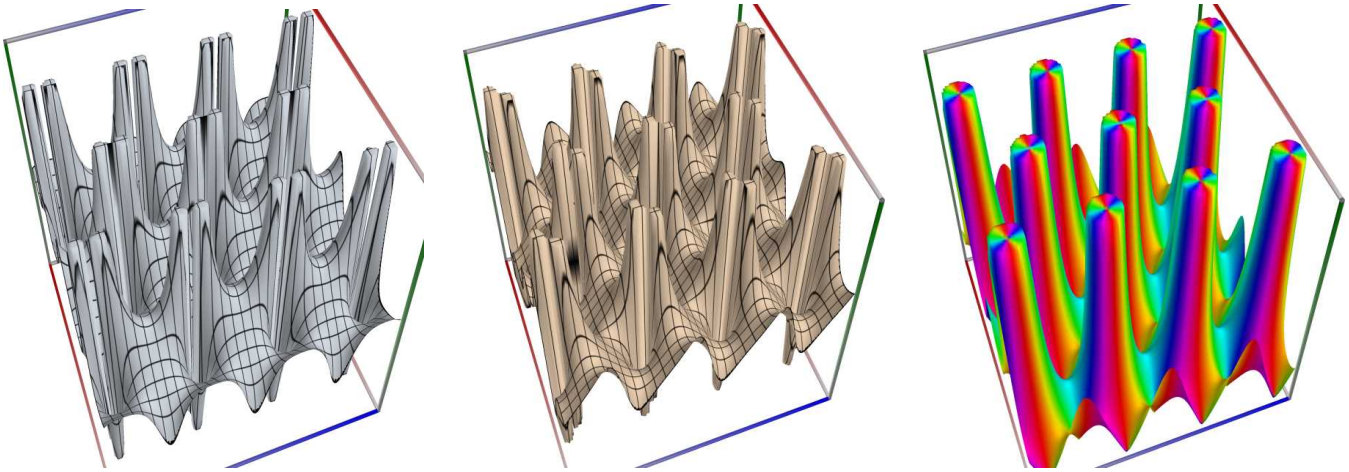

Left figure: real part of the Weierstrass function $\wp_g(z, g_2, g_3)$.

Middle figure: imaginary part of the Weierstrass function $\wp_g(z, g_2, g_3)$.

Right figure: absolute value of the Weierstrass function $\wp_g(z, g_2, g_3)$, with color-coded phase.

31.2.2 Weierstrass function, first derivative: $\wp'_g(z, g_2, g_3)$

`ctx.`**`weierstrass_pg_prime`**(*z*, *g2*, *g3*)

where `ctx` is `math53`, or `cmathc53`.

Returns the first derivative (with respect to z) of Weierstrass function $\wp_g(x, g_2, g_3)$ based on the lattice invariants g_2, g_3.

See also: MathWorld [988], Ehrhardt [295] (3.2.17.6).

An example in Python, real input:

```
>>> from xlcalcnet import math53
>>> math53.weierstrass_pg_prime(-4.333, 10, 1.333)
100.34693001925689
>>> math53.weierstrass_pg_prime(0.1, 20.0, 2.0)
-1999.799694269612
>>> math53.weierstrass_pg_prime(4.333, 34.0, 4.333)
219.24056194806474
```

An example in Python, complex input:

```
>>> from xlcalcnet import cmath53
>>> print(cmath53.weierstrass_pg_prime(-4.333 + 2j, 10 + 2j, 1.333 + 2j))
(-9.60742727506246, -4.7515735665036)
>>> print(cmath53.weierstrass_pg_prime(0.1 + 2j, 20.0 + 2j, 2.0 + 2j))
(140.509864195873, -75.5822080332633)
>>> print(cmath53.weierstrass_pg_prime(4.333 + 2j, 34.0 + 2j, 4.333 + 2j))
(-10.8452449282067, -2.62673784448917)
```

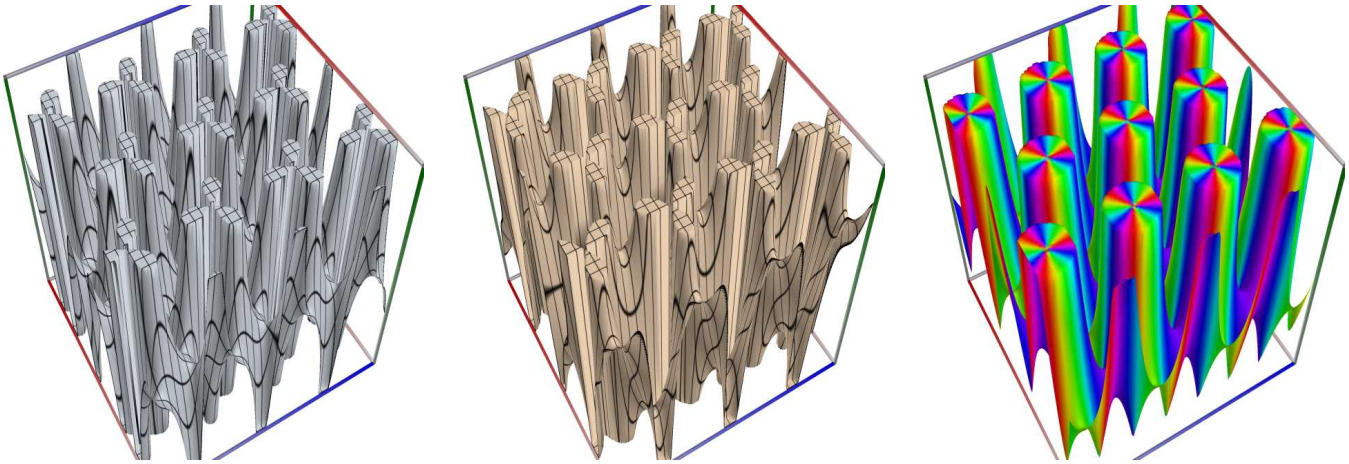

Left figure: real part of the Weierstrass function, first derivative: $\wp'_g(z, g_2, g_3)$.

Middle figure: imaginary part of the Weierstrass function, first derivative: $\wp'_g(z, g_2, g_3)$.

Right figure: absolute value of the Weierstrass function, first derivative: $\wp'_g(z, g_2, g_3)$, with color-coded phase.

31.2.3 Weierstrass Zeta function $\zeta_g(z, g_2, g_3)$

`ctx.weierstrass_zeta_g`(*z*, *g2*, *g3*)

where `ctx` is `math53`, or `cmathc53`.

Computes the Weierstrass zeta function $\zeta_g(z; g_2, g_3)$.

The function is related to $\wp(z; g_2, g_3)$ by $\dfrac{d\zeta(z; g_2, g_3)}{\mathrm{d}z} = -\wp(z; g_2, g_3)$ and $\zeta(z; g_2, g_3) - z^{-1} = \displaystyle\int_0^z \left(\wp(z; g_2, g_3) - z^{-2}\right)$.

See also MathWorld [990], Flint [766].

An example in Python, real input:

```
>>> from xlcalcnet import math53
>>> math53.weierstrass_zeta_g(-4.333, 10, 1.333)
-6.828148914468967
>>> math53.weierstrass_zeta_g(0.1, 20.0, 2.0)
9.999666519045453
>>> math53.weierstrass_zeta_g(4.333, 34.0, 4.333)
1.491047024531138
```

An example in Python, complex input:

```
>>> from xlcalcnet import cmath53
>>> print(cmath53.weierstrass_zeta_g(-4.333 + 2j, 10 + 2j, 1.333 + 2j))
(-4.3288407986234, -0.33662296937503)
>>> print(cmath53.weierstrass_zeta_g(0.1 + 2j, 20.0 + 2j, 2.0 + 2j))
(1.51475775412759, -5.77385329910738)
>>> print(cmath53.weierstrass_zeta_g(4.333 + 2j, 34.0 + 2j, 4.333 + 2j))
(5.53116697709506, -3.43549361319103)
```

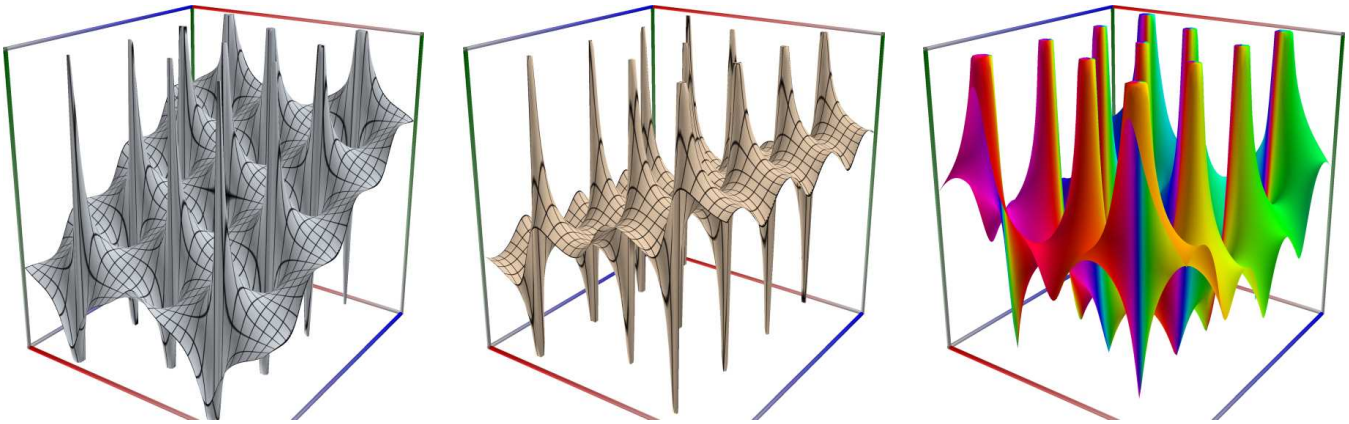

Left figure: real part of the Weierstrass Zeta function $\zeta_g(z, g_2, g_3)$.

Middle figure: imaginary part of the Weierstrass Zeta function $\zeta_g(z, g_2, g_3)$.

Right figure: absolute value of the Weierstrass Zeta function $\zeta_g(z, g_2, g_3)$, with color-coded phase.

31.2.4 Weierstrass Sigma function $\sigma_g(z, g_2, g_3)$

`ctx.weierstrass_sigma_g`(*z*, *g2*, *g3*)

where `ctx` is `math53`, or `cmathc53`.

Computes the Weierstrass sigma function, $\sigma_g(z; g_2, g_3)$. We have $\sigma_g(tz; t^{-4}g_2, t^{-6}g_3) = t\sigma_g(z; g_2, g_3)$.

The function is related to $\zeta(z; g_2, g_3)$ by $\dfrac{d}{dz}\log\sigma(z; g_2, g_3) = \zeta(z; g_2, g_3)$.

See also MathWorld [989], Flint [766].

See also: https://dlmf.nist.gov/23.2

An example in Python, real input:

```
>>> from xlcalcnet import math53
>>> math53.weierstrass_sigma_g(-4.333, 10, 1.333)
-372.92427325514853
>>> math53.weierstrass_sigma_g(0.1, 20.0, 2.0)
0.09999916642609118
>>> math53.weierstrass_sigma_g(4.333, 34.0, 4.333)
87291.86806897493
```

An example in Python, complex input:

```
>>> from xlcalcnet import cmath53
>>> print(cmath53.weierstrass_sigma_g(-4.333 + 2j, 10 + 2j, 1.333 + 2j))
(-3115.98477265303, 2832.39246145056)
>>> print(cmath53.weierstrass_sigma_g(0.1 + 2j, 20.0 + 2j, 2.0 + 2j))
(-0.789295547618554, -1.39808798175058)
>>> print(cmath53.weierstrass_sigma_g(4.333 + 2j, 34.0 + 2j, 4.333 + 2j))
(-2463045.45917973, 482034.324963562)
```

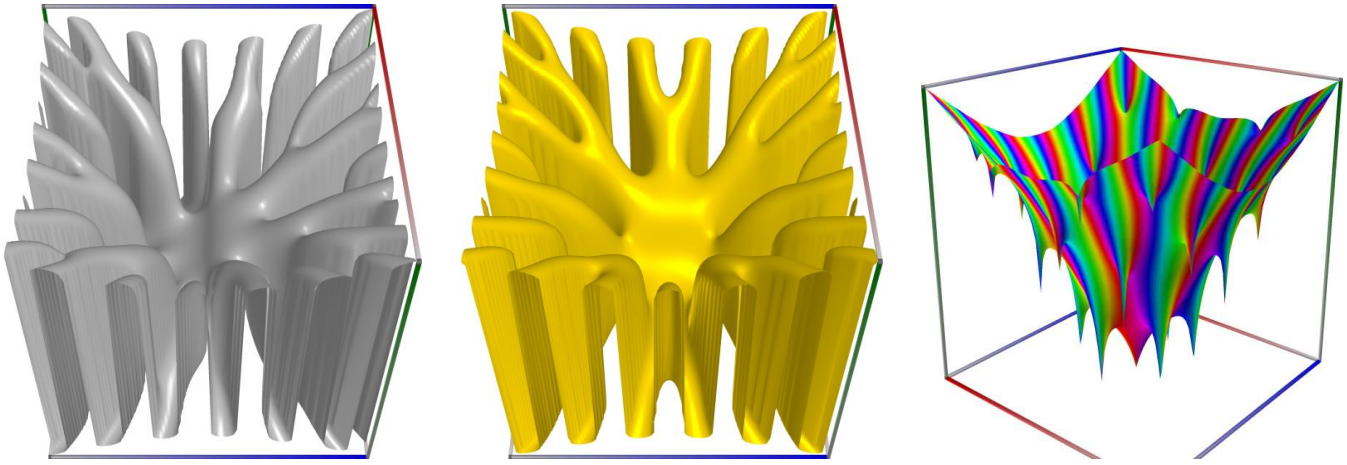

Left figure: real part of the Weierstrass Sigma function $\sigma_g(z, g_2, g_3)$.

Middle figure: imaginary part of the Weierstrass Sigma function $\sigma_g(z, g_2, g_3)$.

Right figure: absolute value of the Weierstrass Sigma function $\sigma_g(z, g_2, g_3)$, with color-coded phase.

31.2.5 Inverse Weierstrass function $\wp_g^{-1}(z, g_2, g_3)$

math53.**weierstrass_pg_inv**(*z*, *g2*, *g3*)

Returns the functional inverse $\wp_g^{-1}$ of the Weierstrass function for $y \geq e_1$, i.e. the smallest positive x with $\wp_g^{-1}(y, g_2, g_3) = y$, if it exists. See also: MathWorld [983], Ehrhardt [295] (3.2.17.9).

See also MathWorld [983], Flint [766].

$$\wp_g^{-1}(z; g_2, g_3) = \wp^{-1}(z|\tau = \omega_2/\omega_1, \omega = \omega_1)$$

An example in Python, real input:

```
>>> from xlcalcnet import math53
>>> math53.weierstrass_pg_inv(4.333, 10, 1.333)
0.4873459128502748
>>> math53.weierstrass_pg_inv(10.1, 20.0, 2.0)
0.3162445425781658
>>> math53.weierstrass_pg_inv(14.333, 34.0, 4.333)
0.26525776346953506
```

31.3 Weierstrass elliptic functions, in terms of (real) lattice roots e_1, e_2

The Weierstrass functions take real values on the real axis iff the lattice is fixed under complex conjugation, or, equivalently, when $g_2, g_3 \in \mathbb{R}$.

31.3.1 Weierstrass function $\wp_e(x, e_1, e_2)$

`ctx.weierstrass_pe`(*x*, *e1*, *e2*)

where `ctx` is `math53`, or `cmathc53`.

Returns the Weierstrass function $\wp_e(x, e_1, e_2)$, using the lattice roots.

See also Wikipedia [1349], MathWorld [987], Ehrhardt [295] (3.2.17.2).

$$\wp_e(x, e_1, e_2) = e_3 + \frac{e_1 - e_3}{\mathrm{sn}^2(u,k)} = e_2 + (e_1 - e_3)\frac{\mathrm{dn}^2(u,k)}{\mathrm{sn}^2(u,k)} = e_1 + (e_1 - e_3)\frac{\mathrm{cn}^2(u,k)}{\mathrm{sn}^2(u,k)}, \quad k = \sqrt{\frac{e_2 - e_3}{e_1 - e_3}}, \quad u = x\sqrt{e_1 - e_3}.$$

An example in Python, real input:

```
>>> from xlcalcnet import math53
>>> math53.weierstrass_pe(-4.333, 10, 1.333)
62.77933900177221
>>> math53.weierstrass_pe(0.1, 20.0, 2.0)
100.87803026305971
>>> math53.weierstrass_pe(4.333, 34.0, 4.333)
34.006941639647195
```

An example in Python, complex input:

```
>>> from xlcalcnet import cmath53
>>> print(cmath53.weierstrass_pe(-4.333 + 2j, 10 + 2j, 1.333 + 2j))
(5.59040619306163, 0.0542886723540591)
>>> print(cmath53.weierstrass_pe(0.1 + 2j, 20.0 + 2j, 2.0 + 2j))
(-13.69274135737, -14.9209564362749)
>>> print(cmath53.weierstrass_pe(4.333 + 2j, 34.0 + 2j, 4.333 + 2j))
(72.65404480432, -5.52157466207592)
```

31.3.2 Weierstrass function $\wp'_e(x, e_1, e_2)$

`ctx.weierstrass_pe_prime`(*x*, *e1*, *e2*)

where `ctx` is `math53`, or `cmathc53`.

Returns the derivative of the Weierstrass function $\wp'_e(x, e_1, e_2)$, using the lattice roots.

See also Wikipedia [1349], MathWorld [987], Ehrhardt [295] (3.2.17.3).

An example in Python, real input:

```
>>> from xlcalcnet import math53
>>> math53.weierstrass_pe_prime(-4.333, 10, 1.333)
980.5172428571691
>>> math53.weierstrass_pe_prime(0.1, 20.0, 2.0)
-1982.5872192708089
>>> math53.weierstrass_pe_prime(4.333, 34.0, 4.333)
7.720363063395518
```

An example in Python, complex input:

```
>>> from xlcalcnet import cmath53
>>> print(cmath53.weierstrass_pe_prime(-4.333 + 2j, 10 + 2j, 1.333 + 2j))
(-4.38999824494254, 39.3851479574405)
```

(continues on next page)

(continued from previous page)

```
>>> print(cmath53.weierstrass_pe_prime(0.1 + 2j, 20.0 + 2j, 2.0 + 2j))
(-214.843672001201, -39.9786384235354)
>>> print(cmath53.weierstrass_pe_prime(4.333 + 2j, 34.0 + 2j, 4.333 + 2j))
(-1082.62138709268, 172.238870179954)
```

31.3.3 Weierstrass Zeta function $\zeta_e(z, e_1, e_2)$

`ctx.`**`weierstrass_zeta_e`**(*z*, *e_1*, *e_2*)

where `ctx` is `math53`, or `cmathc53`.

Computes the Weierstrass zeta function $\zeta_e(z; e_1, e_2)$, using the lattice roots.

See also MathWorld [990], Flint [766].

An example in Python, real input:

```
>>> from xlcalcnet import math53
>>> math53.weierstrass_zeta_e(-4.333, 10, 1.333)
-25.9488086106238
>>> math53.weierstrass_zeta_e(0.1, 20.0, 2.0)
9.970614183821874
>>> math53.weierstrass_zeta_e(4.333, 34.0, 4.333)
63.38036787983493
```

An example in Python, complex input:

```
>>> from xlcalcnet import cmath53
>>> print(cmath53.weierstrass_zeta_e(-4.333 + 2j, 10 + 2j, 1.333 + 2j))
(-18.0157055351652, -10.4828149424189)
>>> print(cmath53.weierstrass_zeta_e(0.1 + 2j, 20.0 + 2j, 2.0 + 2j))
(-0.151095298216553, -19.2822083793587)
>>> print(cmath53.weierstrass_zeta_e(4.333 + 2j, 34.0 + 2j, 4.333 + 2j))
(70.6503283547739, -38.2130366771291)
```

31.3.4 Weierstrass Sigma function $\sigma_e(z, e_1, e_2)$

`ctx.`**`weierstrass_sigma_e`**(*z*, *e_1*, *e_2*)

where `ctx` is `math53`, or `cmathc53`.

Computes the Weierstrass sigma function, $\sigma_g(z; g_2, g_3)$, using the lattice roots.

See also MathWorld [989], Flint [766].

See also: https://dlmf.nist.gov/23.2

An example in Python, real input:

```
>>> from xlcalcnet import math53
>>> math53.weierstrass_sigma_e(-4.333, 10, 1.333)
3.935093358056559e+16
>>> math53.weierstrass_sigma_e(0.1, 20.0, 2.0)
0.09992639951939603
>>> math53.weierstrass_sigma_e(4.333, 34.0, 4.333)
-7.654411553804196e+58
```

An example in Python, complex input:

```
>>> from xlcalcnet import cmath53
>>> print(cmath53.weierstrass_sigma_e(-4.333 + 2j, 10 + 2j, 1.333 + 2j))
(-1.39944090147892E+21, 7.70690014562852E+20)
>>> print(cmath53.weierstrass_sigma_e(0.1 + 2j, 20.0 + 2j, 2.0 + 2j))
```

(continues on next page)

(continued from previous page)

```
(277453554.514112, 70902365.1072344)
>>> print(cmath53.weierstrass_sigma_e(4.333 + 2j, 34.0 + 2j, 4.333 + 2j))
(7.40240693393652E+75, 4.73199376169483E+75)
```

31.3.5 Inverse Weierstrass function $\wp_e^{-1}(y, e_1, e_2)$

math53.**weierstrass_pe_inv**(y, *e1*, *e2*)

Returns the functional inverse $\wp_e^{-1}$ of the Weierstrass function for $y \geq e_1$, i.e. the smallest positive x with $\wp_e(x, e_1, e_2) = y$. The result is computed with the symmetric Carlson integral,

$$\wp_e^{-1}(y, e_1, e_2) = \frac{1}{2}\int_y^{\infty} \frac{\mathrm{d}t}{\sqrt{(t-e_1)(t-e_2)(t-e_3)}} = R_F(y-e_1, y-e_2, y-e_3)$$

See also: MathWorld [983], Ehrhardt [295] (3.2.17.8).

An example in Python, real input:

```
>>> from xlcalcnet import math53
>>> math53.weierstrass_pe_inv(50.1, 10, 1.333)
0.14192809248211186
>>> math53.weierstrass_pe_inv(44.333, 20.0, 2.0)
0.1538126930316279
>>> math53.weierstrass_pe_inv(144.333, 34.0, 4.333)
0.083768035526265
```

Part VII

User library: numerical

CHAPTER

THIRTYTWO

ADDITIONAL CLASSES

General concepts

See also: https://en.wikipedia.org/wiki/Power_of_a_test

See also: https://en.wikipedia.org/wiki/Sample_size_determination

32.1 User defined functions based on multiple precision arithmetic (Python)

32.1.1 Overview

High-level code in xlcalcnet is, as in mpmath, implemented as methods on a "context object". The context implements arithmetic, type conversions and other fundamental operations. The context also holds settings such as precision, and stores cache data. A total of 6 different contexts (with a mostly compatible interface) are provided so that the high-level algorithms can be used with different implementations of the underlying arithmetic, allowing different features and speed-accuracy tradeoffs.

32.1.2 Double-precision arithmetic (`fpmlib`)

Although mpmath is generally designed for arbitrary-precision arithmetic, many of the high-level algorithms work perfectly well with ordinary Python `float` and `complex` numbers, which use hardware double precision (on most systems, this corresponds to 53 bits of precision). Whereas the global functions (which are methods of the `mp` object) always convert inputs to mpmath numbers, the `fp` object instead converts them to `float` or `complex`, and in some cases employs basic functions optimized for double precision. When large amounts of function evaluations (numerical integration, plotting, etc) are required, and when `fp` arithmetic provides sufficient accuracy, this can give a significant speedup over `mp` arithmetic.

32.1.3 Binary floating-point in arbitrary-precision and with arbitrary exponent (`mpmlib`)

The `mp` context is what most users probably want to use most of the time, as it supports the most functions, is most well-tested, and is implemented with a high level of optimization. Nearly all examples in this documentation use `mp` functions.

32.1.4 Interval arithmetic in arbitrary-precision and with arbitrary exponent (`ipmlib`)

The `iv.mpf` type represents a closed interval $[a, b]$; that is, the set $\{x : a \le x \le b\}$, where a and b are arbitrary-precision floating-point values, possibly $\pm\infty$. The `iv.mpc` type represents a rectangular complex interval $[a, b] + [c, d]i$; that is, the set $\{z = x + iy : a \le x \le b \wedge c \le y \le d\}$.

Interval arithmetic provides rigorous error tracking. If f is a mathematical function and $\hat{f}$ is its interval arithmetic version, then the basic guarantee of interval arithmetic is that $f(v) \subseteq \hat{f}(v)$ for any input interval v. Put differently, if an interval represents the known uncertainty for a fixed number, any sequence of interval operations will produce an interval that contains what would be the result of applying the same sequence of operations to the exact number. The principal drawbacks of interval arithmetic are speed (`iv` arithmetic is typically at least two times slower than `mp` arithmetic) and that it sometimes provides far too pessimistic bounds.

32.1.5 Decimal floating-point in arbitrary-precision with limited exponent (`dpmlib`)

Additional contexts are used in xlcalcnet to implement its functions for the mpmath data types, and the Decimal data type, which is part of Python.

Both real numbers (mpf) and complex numbers (mpc) are implemented.

In CPython, the `decimal` module provides support for fast correctly-rounded decimal floating point arithmetic. See https://docs.python.org/3.3/library/decimal.html for a decription of the `Decimal` data type.

32.1.6 Rational numbers (quotients) in arbitrary-precision (`qpmlib`)

The `qpm` data type is mostly useful in the context of linear algebra, where it can provide exact results.

Both real numbers (mpf) and complex numbers (mpc) are implemented.

The internal representation dependes on what else is installed on the system:

If `apm` is available, the `fmpq` data type is used; otherwise, if `gpm` is available, the `mpq` data type is used; otherwise, Python's built in `Fraction` data type is used.

32.1.7 Binary floating-point in arbitrary-precision with limited exponent (gpmlib)

gmpy2 is a C-coded Python extension module that supports multiple-precision arithmetic.

https://gmpy2.readthedocs.io/en/latest/

gmpy2 is the successor to the original gmpy module. The gmpy module only supported the GMP multiple-precision library. gmpy2 adds support for the MPFR (correctly rounded real floating-point arithmetic) and MPC (correctly rounded complex floating-point arithmetic) libraries. gmpy2 also updates the API and naming conventions to be more consistent and support the additional functionality. The following libraries are supported:

32.1.8 Binary balls in arbitrary-precision and with arbitrary exponent (apmlib)

The apm context is what most users probably want to use most of the time, as it supports the most functions, is most well-tested, and is implemented with a high level of optimization.

pythonflint is a C-coded Python extension module that supports multiple-precision arithmetic.

32.2 User defined functions based on fixed precision arithmetic (C#)

Various additional numerical context support C# and Python. It is convenient to divide them into groups to make referencing them per function description more efficient.

The following groups of contexts are available:

Note: this has to mention the userlib functions

32.2.1 Scalar functions with `Double` and `Complex`: `m53lib` and `m53libc`

DAMath library.

Double and Complex fully support Boost.Math and Eigen.

https://en.wikipedia.org/wiki/Double-precision_floating-point_format

32.2.2 Binary floating point, single precision: `slib` and `slibc`

sreal and scplx fully support Boost.Math and Eigen.

https://en.wikipedia.org/wiki/Single-precision_floating-point_format

32.2.3 Binary floating point, double precision: `dlib` and `dlibc`

dreal and dcplx fully support Boost.Math and Eigen.

https://en.wikipedia.org/wiki/Double-precision_floating-point_format

32.2.4 Binary floating point, extended precision: `elib` and `elibc`

ereal and ecplx fully support Boost.Math and Eigen.

https://en.wikipedia.org/wiki/Extended_precision

32.2.5 Binary floating point, quadruple precision: `qlib` and `qlib`

qreal and qcplx fully support Boost.Math and Eigen.

https://en.wikipedia.org/wiki/Quadruple-precision_floating-point_format

32.2.6 Binary floating point, octuple precision: `olib` and `olibc`

oreal and ocplx fully support Boost.Math and Eigen.

https://en.wikipedia.org/wiki/Octuple-precision_floating-point_format

32.3 User defined functions based on arbitrary precision arithmetic (C#)

32.3.1 Binary floating point, multiple precision: `mlib`, `mlibc`

Some text

arbitrary precision significand, fixed size exponent

32.3.2 Binary floating point, single precision: `sflib` and `sflibc`

sreal and scplx fully support Boost.Math and Eigen.

https://en.wikipedia.org/wiki/Single-precision_floating-point_format

32.3.3 Binary floating point, double precision: `dflib` and `dflibc`

dreal and dcplx fully support Boost.Math and Eigen.

https://en.wikipedia.org/wiki/Double-precision_floating-point_format

32.3.4 Binary floating point, extended precision: `eflib` and `eflibc`

ereal and ecplx fully support Boost.Math and Eigen.

https://en.wikipedia.org/wiki/Extended_precision

32.3.5 Binary floating point, quadruple precision: `qflib` and `qflibc`

qreal and qcplx fully support Boost.Math and Eigen.

https://en.wikipedia.org/wiki/Quadruple-precision_floating-point_format

32.3.6 Binary floating point, octuple precision: `oflib` and `oflibc`

oreal and ocplx fully support Boost.Math and Eigen.

https://en.wikipedia.org/wiki/Octuple-precision_floating-point_format

32.3.7 Binary floating point, multiple precision: `mflib`, `mflibc`

Some text

arbitrary precision significand, fixed size exponent

32.3.8 Binary arbitrary precision ball: `aflib` and `aflibc`

Some text

arbitrary precision significand and exponent

https://flib.org/

Note: Exponent soft maximum and minimum

32.4 Scalar functions

32.4.1 Real and complex sine

`ctxlib.`**`sin`**(x)

where `ctx` is `ctx_pm` (see *Python contexts* for details), `ctx53`, `ctxcpp`, `ctxflint` (see *.NET contexts* for details). The corresponding `ctx` python lists are `ctxlistreal` and `ctxlistcplx`.

Returns the sine of x, $\sin(x)$. See also Wikipedia [1239], MathWorld [870], NIST [490], Ehrhardt [295] (4.2.55), Flint [742], Flint [732], Mpmath [555].

32.4.2 Quadratic equation

`ctx.eval_quadratic`(x, A, B, C)

Returns the value of a quadratic polynomial, $Ax^2 + Bx + C$.

`ctx.quadratic_equation`(A, B, C)

Returns the roots x_1, x_2 of the quadratic equation $Ax^2 + Bx + C = 0$. See also Wikipedia [1092], Press *et al.* [472].

See also: https://dlmf.nist.gov/1.11#iii

$$x_1 = \frac{Q}{A}, \quad x_2 = \frac{C}{Q}, \quad \text{where } Q = -\frac{1}{2}\left(B + \sqrt{B^2 - 4AC)}\right)$$

The sign of the square root is chosen so as to make $\Re(B^* \sqrt{B^2 - 4AC}) \geq 0$, where the asterisk denotes complex conjugation.

An example with real input:

```
>>> from xlcalcnet import dec, mpm, ipm
>>> mpm.dps = 40; x = '125'; n = '3'
>>> \mathrm{d}x = dec.nthroot(x, n); mx = mpm.nthroot(x, n); ix = ipm.nthroot(x, n)
>>> mpm.show([\mathrm{d}x, mx, ix])
dec:  5.000000000000000000000000000000000000000E+0
mpm:  5.000000000000000000000000000000000000000e+0
ipm:  5.000000000000000000000000000000000000000e+0 (2.755e-39%)

>>> from xlcalcnet import mpm, fpm, gmp, apm
>>> mpm.dps = 40; x = '125'; n = '3'
>>> fx = fpm.nthroot(x, n); gx = gmp.nthroot(x, n); ax = apm.nthroot(x, n)
>>> mpm.show([fx, gx, ax])
fpm:  5.00000000000000E+00
gmp:  5.000000000000000000000000000000000000000E+00
apm:  5.000000000000000000000000000000000000002e+0 (3.673e-39%)
```

32.4.3 Monic cubic equation

`ctx.eval_monic_cubic`(x, a, b, c)

Returns the value of a monic cubic polynomial, $x^3 + ax^2 + bx + c$.

`ctx.cubic_equation_monic`(a, b, c)

Returns the roots x_1, x_2, x_3 of the monic cubic equation $x^3 + ax^2 + bx + c = 0$. See also Wikipedia [1083], Press *et al.* [472].

See also: https://dlmf.nist.gov/1.11#iii

$$Q = \frac{a^2 - 3b}{9}, \quad R = \frac{2a^3 - 9ab + 27c}{54}.$$

If Q and R are real *and* $R^2 < Q^3$, then the cubic equation has three real roots, with $\theta = \arccos\left(RQ^{-3/2}\right)$:

$$x_1 = -2\sqrt{Q}\cos\left(\frac{\theta}{3}\right) - \frac{a}{3}, \quad x_2 = -2\sqrt{Q}\cos\left(\frac{\theta + 2\pi}{3}\right) - \frac{a}{3}, \quad x_3 = -2\sqrt{Q}\cos\left(\frac{\theta - 2\pi}{3}\right) - \frac{a}{3}.$$

Otherwise, $A = -\left(R + \sqrt{R^2 - Q^3})\right)^{1/3}$, where the sign of the square root is chosen so as to make $\Re(R^*\sqrt{R^2 - Q^3}) \geq 0$, and the asterisk denotes complex conjugation. Define $B = 0$ if $A = 0$ and $B = Q/A$ if $A \neq 0$. Then the three roots are given by

$$x_1 = (A + B) - \frac{a}{3}, \quad x_2 = -\frac{1}{2}(A + B) - \frac{a}{3} + i\frac{\sqrt{3}}{2}(A - B), \quad x_3 = -\frac{1}{2}(A + B) - \frac{a}{3} - i\frac{\sqrt{3}}{2}(A - B).$$

Note that x_1 is real if a, b, c are real.

An example with real input:

```
>>> from xlcalcnet import dec, mpm, ipm
>>> mpm.dps = 40; x = '125'; n = '3'
>>> \mathrm{d}x = dec.nthroot(x, n); mx = mpm.nthroot(x, n); ix = ipm.nthroot(x, n)
>>> mpm.show([\mathrm{d}x, mx, ix])
dec:  5.000000000000000000000000000000000000000E+0
mpm:  5.000000000000000000000000000000000000000e+0
ipm:  5.000000000000000000000000000000000000000e+0 (2.755e-39%)

>>> from xlcalcnet import mpm, fpm, gmp, apm
>>> mpm.dps = 40; x = '125'; n = '3'
>>> fx = fpm.nthroot(x, n); gx = gmp.nthroot(x, n); ax = apm.nthroot(x, n)
>>> mpm.show([fx, gx, ax])
fpm:  5.00000000000000E+00
gmp:  5.000000000000000000000000000000000000000E+00
apm:  5.000000000000000000000000000000000000002e+0 (3.673e-39%)
```

32.4.4 Cubic equation

`ctx.`**`eval_cubic`**(x, A, B, C, D)

Returns the value of a cubic polynomial, $Ax^3 + Bx^2 + Cx + D$.

`ctx.`**`cubic_equation`**(A, B, C, D)

Returns the roots x_1, x_2, x_3 of the cubic equation $Ax^3 + Bx^2 + Cx + D = 0$. See also Wikipedia [1083], Press *et al.* [472].

See also: https://dlmf.nist.gov/1.11#iii

This just calls *CubicEquationMonicRoots(z, a, b, c)* with $a = B/A, b = C/A, c = D/A$.

An example with real input:

```
>>> from xlcalcnet import dec, mpm, ipm
>>> mpm.dps = 40; x = '125'; n = '3'
>>> \mathrm{d}x = dec.nthroot(x, n); mx = mpm.nthroot(x, n); ix = ipm.nthroot(x, n)
>>> mpm.show([\mathrm{d}x, mx, ix])
dec:  5.000000000000000000000000000000000000000E+0
mpm:  5.000000000000000000000000000000000000000e+0
ipm:  5.000000000000000000000000000000000000000e+0 (2.755e-39%)

>>> from xlcalcnet import mpm, fpm, gmp, apm
>>> mpm.dps = 40; x = '125'; n = '3'
>>> fx = fpm.nthroot(x, n); gx = gmp.nthroot(x, n); ax = apm.nthroot(x, n)
>>> mpm.show([fx, gx, ax])
fpm:  5.00000000000000E+00
gmp:  5.000000000000000000000000000000000000000E+00
apm:  5.000000000000000000000000000000000000002e+0 (3.673e-39%)
```

32.4.5 Quartic equation

`ctx.eval_quartic`(x, A, B, C, D, E)

Returns the value of a quartic polynomial, $Ax^4 + Bx^3 + Cx^2 + Dx + E$.

`ctx.quartic_equation`(A, B, C, D, E)

Returns the roots x_1, x_2, x_3, x_4 of the quartic equation $Ax^4 + Bx^3 + Cx^2 + Dx + E = 0$. See also Wikipedia [1093].

See also: https://dlmf.nist.gov/1.11#iii

Define $a = \dfrac{-3B^2}{8A^2} + \dfrac{C}{A}$, $\quad b = \dfrac{B^3}{8A^3} - \dfrac{BC}{2A^2} + \dfrac{D}{A}$, $\quad c = \dfrac{-3B^4}{256A^4} + \dfrac{CB^2}{16A^3} - \dfrac{BD}{4A^2} + \dfrac{E}{A}$, $\quad V = \dfrac{B}{4A}$.

If $b = 0$ then

$x_1 = V + Z_1$, $\quad x_2 = V - Z_1$, $\quad x_3 = V + Z_2$, $\quad x_4 = V - Z_2$,

where $W = \sqrt{a^2 - 4c}$, $\quad Z_1 = \sqrt{\frac{1}{2}(-a + W)}$, $\quad Z_2 = \sqrt{\frac{1}{2}(-a - W)}$.

If $b \neq 0$ then

$x_1 = V + \frac{1}{2}(W + Z_1)$, $\quad x_2 = V + \frac{1}{2}(W - Z_1)$, $\quad x_3 = V - \frac{1}{2}(W + Z_2)$, $\quad x_4 = V - \frac{1}{2}(W - Z_2)$,

where $W = \sqrt{a + 2y}$, $\quad Z_1 = \sqrt{-3a - 2y - \dfrac{2b}{W}}$, $\quad Z_2 = \sqrt{-3a - 2y + \dfrac{2b}{W}}$,

and y is any root of the monic cubic equation $y^3 + ey^2 + fy + g = 0$, with $e = \dfrac{5a}{2}$, $\quad f = 2a^2 - c$, $\quad g = \dfrac{a^3}{2} - \dfrac{ac}{2} - \dfrac{b^2}{8}$;

y is calculated as the first root returned by *CubicEquationMonicRoots(y, e, f, g)*.

An example with real input:

```
>>> from xlcalcnet import dec, mpm, ipm
>>> mpm.dps = 40; x = '125'; n = '3'
>>> \mathrm{d}x = dec.nthroot(x, n); mx = mpm.nthroot(x, n); ix = ipm.nthroot(x, n)
>>> mpm.show([\mathrm{d}x, mx, ix])
dec:  5.000000000000000000000000000000000000000E+0
mpm:  5.000000000000000000000000000000000000000e+0
ipm:  5.000000000000000000000000000000000000000e+0 (2.755e-39%)

>>> from xlcalcnet import mpm, fpm, gmp, apm
>>> mpm.dps = 40; x = '125'; n = '3'
>>> fx = fpm.nthroot(x, n); gx = gmp.nthroot(x, n); ax = apm.nthroot(x, n)
>>> mpm.show([fx, gx, ax])
fpm:  5.00000000000000E+00
gmp:  5.000000000000000000000000000000000000000E+00
apm:  5.000000000000000000000000000000000000002e+0 (3.673e-39%)
```

32.4.6 Transscribed from Julia: complex elliptic functions in double precision

Text describing functions

32.4.7 Transscribed from Julia: complex hurwitz function, and related, in double precision

Text describing functions

32.4.8 Speeedups for iterative algorithms which require an initial guess

Text describing functions

Inverses of cdfs: inverses of noncentral functions

inverses livk gamma_inva

32.4.9 Examples for matrix functions

Text describing functions

Descriptive statistics via numpy in multiple precision

Multiple linear regression via numpy in multiple precision

Canonical correlation via numpy in multiple precision

Descriptive statistics via Eigen in multiple precision

Multiple linear regression via Eigen in multiple precision

Canonical correlation via Eigen in multiple precision

Levenberg-Marquardt algorithm via Eigen in multiple precision

L-BFGS algorithm via Eigen in multiple precision

CHAPTER

THIRTYTHREE

DISTRIBUTION FUNCTIONS

Text explaining this chapter

33.1 Distributions related to multiple comparisons of means

33.1.1 Normal maximum distribution, $\rho_{ij,i\neq j} = \rho$: pdf, cdf, qtf, boost class

`math53lib.`**`NmaxRhoPdf`**(*x*, *rho*, *k*)

`math53lib.`**`NmaxRhoCdf`**(*x*, *rho*, *k*)

`math53lib.`**`NmaxRhoQtf`**(*q*, *rho*, *k*)

`math53lib.`**`NmaxRhoDist`**(*rho*, *k*)

Returns the pdf, cdf, qtf or boost class of a random variable X, following the distribution of the maximum of $k \geq 2$ correlated standard normal variates, with common correlation $-1/(k-1) \leq \rho \leq 1$ and the support interval $(-\infty, +\infty)$, and $0 \leq q \leq 1$.

See also Dunnett [290], Bechhofer and Dunnett [26], Grubbs [352], Bechhofer and Dunnett [26], Stoline and Ury [505], and Hahn and Hendrickson [359].

$$\text{pdf}(x) = f_{\text{nmaxrho}}(x, \rho, k) = \frac{k}{b} \int_{-\infty}^{\infty} (\Phi(z_1))^{k-1} \, \phi(z_1) \, \phi(y) \, dy,$$

$$\text{cdf}(x) = F_{\text{nmaxrho}}(x, \rho, k) = \int_{-\infty}^{\infty} (\Phi(z_1))^{k} \, \phi(y) dy,$$

$$\text{sf}(x) = 1 - \int_{-\infty}^{\infty} (\Phi(z_1))^{k} \, \phi(y) dy,$$

where $z_1 = \dfrac{x+a}{b}$, $a = y\sqrt{\rho}$, and $b = \sqrt{1-\rho}$. Note that while z_1 is a complex number for $\rho < 0$, the integral always evaluates to a real number. In the context of the Dunnett t-test with reference sample size n_0 and common comparator sample size n_i, $\rho = \dfrac{1}{1+n_0/n_i}$. In the context of maximum deviation from the common mean (equal sample sizes), $\rho = -\dfrac{1}{k-1}$.

There is no known explicit expression for $\text{qtf}(q)$ or $\text{isf}(q)$: These functions are computed with Newton iterations where the starting values are from the corresponding Boost functions (in double precision).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.NmaxRhoPdf(x, rho, k)
ereal('5.2359877559829887307E-1')
```

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.NmaxRhoPdf(x, rho, k)
ereal('5.2359877559829887307E-1')

>>> from xlcalcnet import math53
>>> math53.NmaxRhoCdf(x, rho, k)
ereal('5.2359877559829887307E-1')
>>> math53.NmaxRhoCdf(x, rho, k)
ereal('5.3518479027559984754E-1')

>>> from xlcalcnet import math53
>>> math53.NmaxRhoQtf(q, rho, k)
ereal('5.2359877559829887307E-1')
>>> math53.NmaxRhoQtf(q, rho, k)
ereal('5.3518479027559984754E-1')
```

33.1.2 Normal maximum modulus distribution, $\rho_{ij,i\neq j} = \rho$: pdf, cdf, qtf, boost class

`math53lib.NmmRhoPdf`(*x*, *rho*, *k*)

`math53lib.NmmRhoCdf`(*x*, *rho*, *k*)

`math53lib.NmmRhoQtf`(*q*, *rho*, *k*)

`math53lib.NmmRhoDist`(*rho*, *k*)

Returns the pdf, cdf, qtf or boost class of a random variable X, following the distribution of the maximum of the absolute value of $k \geq 2$ correlated standard normal variates, with common correlation $-1/(k-1) \leq \rho \leq 1$ and the support interval $(0, +\infty)$, and $0 \leq q \leq 1$.

See also Dunnett [290], Bechhofer and Dunnett [26], Grubbs [352], Bechhofer and Dunnett [26], Stoline and Ury [505], and Hahn and Hendrickson [359].

$$\text{pdf}(x) = \frac{k}{b} \int_{-\infty}^{\infty} \left(\Phi(z_1) - \Phi(z_2)\right)^{k-1} \left(\phi(z_1) + \phi(z_1)\right) \phi(y)\, dy,$$

$$\text{cdf}(x) = F_{\text{nmaxrho}}(x, \rho, k) = \int_{-\infty}^{\infty} \left(\Phi(z_1) - \Phi(z_2)\right)^{k} \phi(y) dy,$$

$$\text{sf}(x) = 1 - \int_{-\infty}^{\infty} \left(\Phi(z_1) - \Phi(z_2)\right)^{k} \phi(y) dy,$$

where $z_1 = \dfrac{x+a}{b}$, $z_2 = \dfrac{-x+a}{b}$, $a = y\sqrt{\rho}$, and $b = \sqrt{1-\rho}$. Note that while z_1 and z_2 are complex numbers for $\rho < 0$, the integral always evaluates to a real number. In the context of the Dunnett t-test with reference sample size n_0 and common comparator sample size n_i, $\rho = \dfrac{1}{1 + n_0/n_i}$. In the context of maximum deviation from the common mean (equal sample sizes), $\rho = -\dfrac{1}{k-1}$.

There is no known explicit expression for $\text{qtf}(q)$ or $\text{isf}(q)$: These functions are computed with Newton iterations where the starting values are from the corresponding Boost functions (in double precision).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.NmmRhoPdf(x, rho, k)
ereal('5.2359877559829887307E-1')
```

```
>>> from xlcalcnet import math53
>>> math53.NmmRhoPdf(x, rho, k)
ereal('5.2359877559829887307E-1')

>>> from xlcalcnet import math53
>>> math53.NmmRhoCdf(x, rho, k)
ereal('5.2359877559829887307E-1')
>>> math53.NmmRhoCdf(x, rho, k)
ereal('5.3518479027559984754E-1')

>>> from xlcalcnet import math53
>>> math53.NmmRhoQtf(q, rho, k)
ereal('5.2359877559829887307E-1')
>>> math53.NmmRhoQtf(q, rho, k)
ereal('5.3518479027559984754E-1')
```

33.1.3 Normal maximum distribution, $\rho_{ij,i\neq j} = \lambda_i\lambda_j$: pdf, cdf, qtf, boost class

math53lib.**NmaxRhoijPdf**(*x*, *lambda_i*, *k*)

math53lib.**NmaxRhoijCdf**(*x*, *lambda_i*, *k*)

math53lib.**NmaxRhoijQtf**(*q*, *lambda_i*, *k*)

math53lib.**NmaxRhoijDist**(*lambda_i*, *k*)

Returns the pdf, cdf, qtf or boost class of a random variable X, following the distribution of the maximum deviate of $k \geq 2$ correlated standard normal variates, with common correlation $0 \leq \rho \leq 1$ and the support interval $(-\infty, +\infty)$, and $0 \leq q \leq 1$. See also Dunnett [290], Bechhofer and Dunnett [26], Grubbs [352], Bechhofer and Dunnett [26], Stoline and Ury [505], and Hahn and Hendrickson [359].

$$\text{pdf}(x) = f_{\text{nmaxrhoij}}(x, \rho, k) = \frac{k}{b}\int_{-\infty}^{\infty} (\Phi(z_1))^{k-1}\,\phi(z_1)\,\phi(y)\,dy, \quad \text{where}$$

$$z_1 = \frac{x+a}{b}, \quad a = y\sqrt{|\rho|}, \quad b = \sqrt{1-\rho}, \rho = -\frac{1}{k-1}.$$

$$\text{cdf}(x) = F_{\text{nmaxrhoij}}(x, \rho, k) = \int_{-\infty}^{\infty}\left[\Phi\left(\frac{x+\sqrt{|\rho|}y}{\sqrt{1-\rho}}\right)\right]^n \phi(y)dy, \rho = -\frac{1}{k-1}.$$

$$\text{sf}(x) = 1 - \int_{-\infty}^{\infty}\left[\Phi\left(\frac{x+\sqrt{|\rho|}y}{\sqrt{1-\rho}}\right)\right]^n \phi(y)dy, \rho = -\frac{1}{k-1}.$$

For $\lambda_i = \sqrt{\rho} \geq 0$ for all i, this reduces to the equicorrelated case.

With $\rho_{ij} = \lambda_i\lambda_j$, we have for a one-sided test:

$$F_n(h; \rho_{ij}) = \int_{-\infty}^{\infty}\prod_{i=1}^{n}\left[\Phi\left(\frac{(a_i-\mu_i)/\sigma_i + \lambda_i z}{\sqrt{1-\lambda_i^2}}\right)\right]\phi(y)dz$$

There is no known explicit expression for $\text{qtf}(q)$ or $\text{isf}(q)$: These functions are computed with Newton iterations where the starting values are from the corresponding Boost functions (in double precision).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.NmaxRhoijPdf(q, rho, k)
ereal('5.2359877559829887307E-1')
>>> math53.NmaxRhoijPdf(q, rho, k)
ereal('5.3518479027559984754E-1')
```

```
>>> from xlcalcnet import math53
>>> math53.NmaxRhoijPdf(q, rho, k)
ereal('5.2359877559829887307E-1')
>>> math53.NmaxRhoijPdf(q, rho, k)
ereal('5.3518479027559984754E-1')

>>> from xlcalcnet import math53
>>> math53.NmaxRhoijCdf(q, rho, k)
ereal('5.2359877559829887307E-1')
>>> math53.NmaxRhoijCdf(q, rho, k)
ereal('5.3518479027559984754E-1')

>>> from xlcalcnet import math53
>>> math53.NmaxRhoijQtf(q, rho, k)
ereal('5.2359877559829887307E-1')
>>> math53.NmaxRhoijQtf(q, rho, k)
ereal('5.3518479027559984754E-1')
```

33.1.4 Normal maximum modulus distribution, $\rho_{ij,i\neq j} = \lambda_i\lambda_j$: pdf, cdf, qtf, boost class

`math53lib.`**`NmmRhoijPdf`**(*x*, *rho*, *k*)

`math53lib.`**`NmmRhoijCdf`**(*x*, *rho*, *k*, *cdf=True*)

`math53lib.`**`NmmRhoijQtf`**(*q*, *rho*, *k*, *qtf=True*)

`math53lib.`**`NmmRhoijDist`**(*q*, *rho*, *k*, *qtf=True*)

Returns the pdf, cdf, qtf or boost class of a random variable X, following the distribution of the maximum of $k \geq 2$ correlated standard normal variates, with correlation $\rho_{ij,i\neq j} = \lambda_i\lambda_j$ and the support interval $(-\infty, +\infty)$, and $0 \leq q \leq 1$.

See also Dunnett [290], Bechhofer and Dunnett [26], Grubbs [352], Bechhofer and Dunnett [26], Stoline and Ury [505], and Hahn and Hendrickson [359].

$$\text{pdf}(x) = \frac{k}{b}\int_{-\infty}^{\infty} \left(\Phi(z_1) - \Phi(z_2)\right)^{k-1} \left(\phi(z_1) + \phi(z_1)\right) \phi(y)\, dy, \quad \text{where}$$

$$z_1 = \frac{x+a}{b}, z_2 = \frac{-x+a}{b}, \quad a = y\sqrt{|\rho|}, \quad b = \sqrt{1-\rho}, \rho = -\frac{1}{k-1}.$$

$$\text{cdf}(x) = \int_{-\infty}^{\infty} \left[\Phi\left(\frac{x+\sqrt{|\rho|}y}{\sqrt{1-\rho}}\right) - \Phi\left(\frac{-x+\sqrt{|\rho|}y}{\sqrt{1-\rho}}\right)\right]^k \phi(y)dy, \rho = -\frac{1}{k-1}.$$

$$\text{sf}(x) = 1 - \int_{-\infty}^{\infty} \left[\Phi\left(\frac{x+\sqrt{|\rho|}y}{\sqrt{1-\rho}}\right) - \Phi\left(\frac{-x+\sqrt{|\rho|}y}{\sqrt{1-\rho}}\right)\right]^k \phi(y)dy, \rho = -\frac{1}{k-1}.$$

For $\lambda_i = \sqrt{\rho} \geq 0$ for all i, this reduces to the equicorrelated case.

With $\rho_{ij} = \lambda_i\lambda_j$, we have for a two-sided test:

$$F_n(h;\rho_{ij}) = \int_{-\infty}^{\infty} \prod_{i=1}^{n} \left[\Phi\left(\frac{(a_i-\mu_i)/\sigma_i + \lambda_i z}{\sqrt{1-\lambda_i^2}}\right) - \Phi\left(\frac{(b_i-\mu_i)/\sigma_i + \lambda_i z}{\sqrt{1-\lambda_i^2}}\right)\right] \phi(y)dz$$

There is no known explicit expression for $\text{qtf}(q)$ or $\text{isf}(q)$: These functions are computed with Newton iterations where the starting values are from the corresponding Boost functions (in double precision).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.NmmRhoijPdf(x, rho, k)
ereal('5.2359877559829887307E-1')
>>> math53.NmmRhoijPdf(x, rho, k)
ereal('5.3518479027559984754E-1')
```

```
>>> from xlcalcnet import math53
>>> math53.NmmRhoijPdf(x, rho, k)
ereal('5.2359877559829887307E-1')
>>> math53.NmmRhoijPdf(x, rho, k)
ereal('5.3518479027559984754E-1')

>>> from xlcalcnet import math53
>>> math53.NmmRhoijCdf(x, rho, k)
ereal('5.2359877559829887307E-1')
>>> math53.NmmRhoijCdf(x, rho, k)
ereal('5.3518479027559984754E-1')
```

(continues on next page)

(continued from previous page)

```
>>> from xlcalcnet import math53
>>> math53.NmmRhoijQtf(q, rho, k)
ereal('5.2359877559829887307E-1')
>>> math53.NmmRhoijQtf(q, rho, k)
ereal('5.3518479027559984754E-1')
```

33.1.5 Normal range distribution: pdf, cdf, qtf, boost class

math53lib.**NrangePdf**(x, k)

math53lib.**NrangeCdf**(n, x)

math53lib.**NrangeQtf**(q, k)

math53lib.**NrangeDist**(k)

Returns the pdf, cdf, qtf or boost class of a random variable X, following a normal range distribution, with $k \geq 2$ groups, and the support interval $(0, +\infty)$, and $0 \leq q \leq 1$. See also Wikipedia [1213], Harter [362], Team [533].

The density in the central case is given by

$$\text{pdf}(x) = k(k-1) \int_{-\infty}^{\infty} (\Phi(y) - \Phi(y-x))^{k-2} \phi(y)\phi(y-x)dy$$

We have

$$\text{cdf}(x) = k \int_{-\infty}^{\infty} \phi(y) \left(\Phi(y) - \Phi(y-x)\right)^{k-1} dy$$

$$\text{sf}(x) = 1 - k \int_{-\infty}^{\infty} \phi(y) \left(\Phi(y) - \Phi(y-x)\right)^{k-1} dy$$

In the noncentral case, this becomes

$$\text{cdf}(x) = F_s r\,(m, n, x) = \sum_{i=1}^{k} \int_{-\infty}^{\infty} \phi(y_i - \mu_i) \left(\prod_{i=1, j \neq i}^{k} (\Phi(y_i - \mu_i) - \Phi(y_i - \mu_i - x) \right) dy_i.$$

There is no known explicit expression for qtf(q) or isf(q): These functions are computed with Newton iterations where the starting values are from the corresponding Boost functions (in double precision).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.NrangePdf(x, k)
ereal('5.235987755982988730 7E-1')
>>> math53.NrangePdfxq, k)
ereal('5.3518479027559984754E-1')
```


```
>>> from xlcalcnet import math53
>>> math53.NrangePdf(x, k)
ereal('5.235987755982988730 7E-1')
>>> math53.NrangePdfxq, k)
ereal('5.3518479027559984754E-1')

>>> from xlcalcnet import math53
>>> math53.NrangeCdf(x, k)
ereal('5.235987755982988730 7E-1')
>>> math53.NrangePdf(x, k)
ereal('5.3518479027559984754E-1')

>>> from xlcalcnet import math53
>>> math53.NrangeQtf(q, k)
ereal('5.235987755982988730 7E-1')
>>> math53.NrangeQtf(q, k)
ereal('5.3518479027559984754E-1')
```

33.1.6 Studentized maximum distribution: pdf, cdf, qtf, boost class

math53lib.**SmaxPdf**(*x*, *k*, *nu*)

math53lib.**SmaxCdf**(*x*, *k*, *nu*)

math53lib.**SmaxQtf**(*q*, *k*, *nu*)

math53lib.**SmaxDist**(*k*, *nu*)

Returns the pdf, cdf, qtf or boost class of a random variable X, following a studentized maximum distribution with $k \geq 1$ groups, ν error degrees of freedom, and the support interval $(-\infty, +\infty)$, and $0 \leq q \leq 1$. See also Stoline and Ury [505], Hochberg and Tamhane [371], Narula [420].

$$\text{pdf}(x) = \int_0^\infty f_{\text{nnax}}(sx, k) \cdot s\sqrt{\nu} \cdot f_\chi\left(s\sqrt{\nu}, \nu\right)\ ds$$

where $f_{\text{nmax}}(\cdot, k)$ is the pdf of the normal maximum with k groups, and $f_\chi(\cdot, \nu)$ is the pdf of the χ-distribution with ν degrees of freedom.

$$\text{cdf}(x) = \int_0^\infty F_{\text{nmax}}(sx, k) \cdot \sqrt{\nu} \cdot f_\chi\left(s\sqrt{\nu}, \nu\right)\ ds$$

where $F_{\text{nnax}}(\cdot, k)$ is the cdf of the normal maximum with k groups, and $f_\chi(\cdot, \nu)$ is the pdf of the χ-distribution with ν degrees of freedom.

$$\text{sf}(x) = 1 - \text{cdf}(x)$$

There is no known explicit expression for $\text{qtf}(q)$ or $\text{isf}(q)$: These functions are computed with Newton iterations where the starting values are from the corresponding Boost functions (in double precision).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.SmaxPdf(x, k)
ereal('5.2359877559829887307E-1')
>>> math53.SmaxPdf(x, k)
ereal('5.3518479027559984754E-1')
```

```
>>> from xlcalcnet import math53
>>> math53.SmaxPdf(x, k)
ereal('5.2359877559829887307E-1')
>>> math53.SmaxPdf(x, k)
ereal('5.3518479027559984754E-1')

>>> from xlcalcnet import math53
>>> math53.SmaxCdf(x, k)
ereal('5.2359877559829887307E-1')
>>> math53.SmaxCdf(x, k)
ereal('5.3518479027559984754E-1')

>>> from xlcalcnet import math53
>>> math53.SmaxQtf(q, k)
ereal('5.2359877559829887307E-1')
>>> math53.SmaxQtf(q, k)
ereal('5.3518479027559984754E-1')
```

33.1.7 Studentized maximum modulus distribution: pdf, cdf, qtf, boost class

math53lib.**SmmPdf**(*x*, *k*, *nu*)

math53lib.**SmmCdf**(*x*, *k*, *nu*)

math53lib.**SmmQtf**(*q*, *k*, *nu*)

math53lib.**SmmDist**(*k*, *nu*)

Returns the pdf, cdf, qtf or boost class of a random variable X, of a random variable X, following a studentized maximum modulus distribution with $k \geq 1$ groups, ν error degrees of freedom, and the support interval $(0, +\infty)$, and $0 \leq q \leq 1$. See also Stoline and Ury [505], Hochberg and Tamhane [371], Narula [420].

$$\text{pdf}(x) = \int_0^\infty f_{\text{nmm}}(sx, k) \cdot s\sqrt{\nu} \cdot f_\chi\left(s\sqrt{\nu}, \nu\right)\ ds$$

where $f_{\text{nmm}}(\cdot, k)$ is the pdf of the normal maximum modulus with k groups, and $f_\chi(\cdot, \nu)$ is the pdf of the χ-distribution with ν degrees of freedom.

$$\text{cdf}(x) = \int_0^\infty F_{\text{nmm}}(sx, k) \cdot \sqrt{\nu} \cdot f_\chi\left(s\sqrt{\nu}, \nu\right)\ ds$$

where $F_{\text{nmm}}(\cdot, k)$ is the cdf of the normal maximum modulus with k groups, and $f_\chi(\cdot, \nu)$ is the pdf of the χ-distribution with ν degrees of freedom.

$$\text{sf}(x) = 1 - \text{cdf}(x)$$

There is no known explicit expression for $\text{qtf}(q)$ or $\text{isf}(q)$: These functions are computed with Newton iterations where the starting values are from the corresponding Boost functions (in double precision).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.SmmPdf(x, k, nu)
ereal('5.2359877559829887307E-1')
>>> math53.SmmPdf(x, k, nu)
ereal('5.3518479027559984754E-1')
```

```
>>> from xlcalcnet import math53
>>> math53.SmmPdf(x, k, nu)
ereal('5.2359877559829887307E-1')
>>> math53.SmmPdf(x, k, nu)
ereal('5.3518479027559984754E-1')

>>> from xlcalcnet import math53
>>> math53.SmmCdf(x, k, nu)
ereal('5.2359877559829887307E-1')
>>> math53.SmmCdf(x, k, nu)
ereal('5.3518479027559984754E-1')

>>> from xlcalcnet import math53
>>> math53.SmmQtf(q, k, nu)
ereal('5.2359877559829887307E-1')
>>> math53.SmmQtf(q, k, nu)
ereal('5.3518479027559984754E-1')
```

33.1.8 Dunnett t-distribution, 1-sided: pdf, cdf, qtf, boost class

math53lib.**Dunnett1Pdf**(*x*, *rho*, *k*, *nu*)

math53lib.**Dunnett1Cdf**(*x*, *rho*, *k*, *nu*)

math53lib.**Dunnett1Qtf**(*q*, *rho*, *k*, *nu*)

math53lib.**Dunnett1Dist**(*rho*, *k*, *nu*)

Returns the pdf, cdf, qtf or boost class of a random variable X, of a random variable X, following a 1-sided Dunnett t-distribution with common correlation ρ, $k \geq 2$ groups (including control group), error degrees of freedom ν, and the support interval $(-\infty, +\infty)$, and $0 \leq q \leq 1$. See also Dunnett [290], Bechhofer and Dunnett [26].

$$\text{pdf}(x) = \int_0^\infty f_{\text{nmaxrho}}(sx, \rho, k) \cdot s\sqrt{\nu} \cdot f_\chi\left(s\sqrt{\nu}, \nu\right)\ ds$$

where $f_{\text{nmaxrho}}(\cdot, \rho, k)$ is the pdf of the normal maximum (equicorrelated case) with common correlation ρ and k groups (see *nmax_rho_pdf()*), and $f_\chi(\cdot, \nu)$ is the pdf of the χ-distribution with ν degrees of freedom.

$$\text{cdf}(x) = \int_0^\infty F_{\text{nmaxrho}}(sx, \rho, k) \cdot \sqrt{\nu} \cdot f_\chi\left(s\sqrt{\nu}, \nu\right)\ ds$$

where $F_{\text{nmaxrho}}(\cdot, \rho, k)$ is the cdf of the normal maximum (equicorrelated case) with common correlation ρ and k groups (see *nmax_rho_cdf()*), and $f_\chi(\cdot, \nu)$ is the pdf of the χ-distribution with ν degrees of freedom.

$$\text{sf}(x) = 1 - \text{cdf}(x)$$

There is no known explicit expression for $\text{qtf}(q)$ or $\text{isf}(q)$: These functions are computed with Newton iterations where the starting values are from the corresponding Boost functions (in double precision).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.Dunnett1Pdf(x, rho, k, nu)
ereal('5.2359877559829887307E-1')
>>> math53.Dunnett1Pdf(x, rho, k, nu)
ereal('5.3518479027559984754E-1')
```

```
>>> from xlcalcnet import math53
>>> math53.Dunnett1Pdf(x, rho, k, nu)
ereal('5.2359877559829887307E-1')
>>> math53.Dunnett1Pdf(x, rho, k, nu)
ereal('5.3518479027559984754E-1')

>>> from xlcalcnet import math53
>>> math53.Dunnett1Cdf(x, rho, k, nu)
ereal('5.2359877559829887307E-1')
>>> math53.Dunnett1Cdf(x, rho, k, nu)
ereal('5.3518479027559984754E-1')

>>> from xlcalcnet import math53
>>> math53.Dunnett1Cdf(q, rho, k, nu)
ereal('5.2359877559829887307E-1')
>>> math53.Dunnett1Cdf(q, rho, k, nu)
ereal('5.3518479027559984754E-1')
```

33.1.9 Dunnett t-distribution, 2-sided: pdf, cdf, qtf, boost class

`math53lib.`**`Dunnett2Pdf`**(*x*, *rho*, *k*, *nu*)

`math53lib.`**`Dunnett2Cdf`**(*x*, *rho*, *k*, *nu*)

`math53lib.`**`Dunnett2Qtf`**(*q*, *rho*, *k*, *nu*)

`math53lib.`**`Dunnett2Dist`**(*rho*, *k*, *nu*)

Returns the pdf, cdf, qtf or boost class of a random variable X, following a 2-sided Dunnett t-distribution with common correlation ρ, $k \geq 2$ groups (including control group), error degrees of freedom ν, and the support interval $(0, +\infty)$, and $0 \leq q \leq 1$. See also Dunnett [290], Bechhofer and Dunnett [26].

$$\text{pdf}(x) = \int_0^\infty f_{\text{nmmrho}}(sx, \rho, k) \cdot s\sqrt{\nu} \cdot f_\chi\left(s\sqrt{\nu}, \nu\right)\ ds$$

where $f_{\text{nmmrho}}(\cdot, \rho, k)$ is the pdf of the normal maximum modulus (equicorrelated case) with common correlation ρ and k groups (see *nmm_rho_pdf()*), and $f_\chi(\cdot, \nu)$ is the pdf of the χ-distribution with ν degrees of freedom.

$$\text{cdf}(x) = \int_0^\infty F_{\text{nmmrho}}(sx, \rho, k)\sqrt{\nu} \cdot f_\chi\left(s\sqrt{\nu}, \nu\right)\ ds$$

where $F_{\text{nmmrho}}(\cdot, \rho, k)$ is the cdf of the normal maximum modulus (equicorrelated case) with common correlation ρ and k groups (see *nmm_rho_cdf()*), and $f_\chi(\cdot, \nu)$ is the pdf of the χ-distribution with ν degrees of freedom.

$$\text{sf}(x) = 1 - \text{cdf}(x)$$

There is no known explicit expression for $\text{qtf}(q)$ or $\text{isf}(q)$: These functions are computed with Newton iterations where the starting values are from the corresponding Boost functions (in double precision).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.Dunnett2Pdf(x, rho, k, nu)
ereal('5.235987755982988730 7E-1')
>>> math53.Dunnett2Pdf(x, rho, k, nu)
ereal('5.351847902755998475 4E-1')
```

```
>>> from xlcalcnet import math53
>>> math53.Dunnett2Pdf(x, rho, k, nu)
ereal('5.235987755982988730 7E-1')
>>> math53.Dunnett2Pdf(x, rho, k, nu)
ereal('5.351847902755998475 4E-1')

>>> from xlcalcnet import math53
>>> math53.Dunnett2Cdf(x, rho, k, nu)
ereal('5.235987755982988730 7E-1')
>>> math53.Dunnett2Cdf(x, rho, k, nu)
ereal('5.351847902755998475 4E-1')

>>> from xlcalcnet import math53
>>> math53.Dunnett2Qtf(q, rho, k, nu)
ereal('5.235987755982988730 7E-1')
>>> math53.Dunnett2Qtf(q, rho, k, nu)
ereal('5.351847902755998475 4E-1')
```

33.1.10 Nair t-distribution: pdf, cdf, qtf, boost class

math53lib.**NairPdf**(x, *rho*, k, *nu*)

math53lib.**NairCdf**(x, *rho*, k, *nu*)

math53lib.**NairQtf**(q, *rho*, k, *nu*)

math53lib.**NairDist**(*rho*, k, *nu*)

Returns the pdf, cdf, qtf or boost class of a random variable X, of a random variable X, following the Nair t-distribution with common correlation ρ, $k \geq 2$ groups (including control group), error degrees of freedom ν, and the support interval $(-\infty, +\infty)$, and $0 \leq q \leq 1$. See also Dunnett [290], Bechhofer and Dunnett [26].

$$\text{pdf}(x) = \int_0^\infty f_{\text{nmaxrho}}(sx, \rho, k) \cdot s\sqrt{\nu} \cdot f_\chi\left(s\sqrt{\nu}, \nu\right)\ ds$$

where $f_{\text{nmaxrho}}(\cdot, \rho, k)$ is the pdf of the normal maximum (equicorrelated case) with common correlation ρ and k groups (see *nmax_rho_pdf()*), and $f_\chi(\cdot, \nu)$ is the pdf of the χ-distribution with ν degrees of freedom.

$$\text{cdf}(x) = \int_0^\infty F_{\text{nmaxrho}}(sx, \rho, k) \cdot \sqrt{\nu} \cdot f_\chi\left(s\sqrt{\nu}, \nu\right)\ ds$$

where $F_{\text{nmaxrho}}(\cdot, \rho, k)$ is the cdf of the normal maximum (equicorrelated case) with common correlation ρ and k groups (see *nmax_rho_cdf()*), and $f_\chi(\cdot, \nu)$ is the pdf of the χ-distribution with ν degrees of freedom.

$$\text{sf}(x) = 1 - \text{cdf}(x)$$

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.NairPdf(x, rho, k, nu)
ereal('5.23598775598298873O7E-1')
>>> math53.NairPdf(x, rho, k, nu)
ereal('5.3518479027559984754E-1')
```

```
>>> from xlcalcnet import math53
>>> math53.NairPdf(x, rho, k, nu)
ereal('5.23598775598298873O7E-1')
>>> math53.NairPdf(x, rho, k, nu)
ereal('5.3518479027559984754E-1')

>>> from xlcalcnet import math53
>>> math53.NairCdf(x, rho, k, nu)
ereal('5.23598775598298873O7E-1')
>>> math53.NairCdf(x, rho, k, nu)
ereal('5.3518479027559984754E-1')

>>> from xlcalcnet import math53
>>> math53.NairQtf(q, rho, k, nu)
ereal('5.23598775598298873O7E-1')
>>> math53.NairQtf(q, rho, k, nu)
ereal('5.3518479027559984754E-1')
```

33.1.11 Halperin t-distribution: pdf, cdf, qtf, boost class

`math53lib.`**`HalperinPdf`**(*x*, *rho*, *k*, *nu*)

`math53lib.`**`HalperinCdf`**(*x*, *rho*, *k*, *nu*)

`math53lib.`**`HalperinQtf`**(*q*, *rho*, *k*, *nu*)

`math53lib.`**`HalperinDist`**(*rho*, *k*, *nu*)

Returns the pdf, cdf, qtf or boost class of a random variable X, following a Halperin t-distribution with common correlation ρ, $k \geq 2$ groups (including control group), error degrees of freedom ν, and the support interval $(0, +\infty)$, and $0 \leq q \leq 1$. See also Dunnett [290], Bechhofer and Dunnett [26].

$$\text{pdf}(x) = \int_0^\infty f_{\text{nmmrho}}(sx, \rho, k) \cdot s\sqrt{\nu} \cdot f_\chi\left(s\sqrt{\nu}, \nu\right)\ ds$$

where $f_{\text{nmmrho}}(\cdot, \rho, k)$ is the pdf of the normal maximum modulus (equicorrelated case) with common correlation ρ and k groups (see *nmm_rho_pdf()*), and $f_\chi(\cdot, \nu)$ is the pdf of the χ-distribution with ν degrees of freedom.

$$\text{cdf}(x) = \int_0^\infty F_{\text{nmmrho}}(sx, \rho, k)\sqrt{\nu} \cdot f_\chi\left(s\sqrt{\nu}, \nu\right)\ ds$$

where $F_{\text{nmmrho}}(\cdot, \rho, k)$ is the cdf of the normal maximum modulus (equicorrelated case) with common correlation ρ and k groups (see *nmm_rho_cdf()*), and $f_\chi(\cdot, \nu)$ is the pdf of the χ-distribution with ν degrees of freedom.

$$\text{sf}(x) = 1 - \text{cdf}(x)$$

There is no known explicit expression for $\text{qtf}(q)$ or $\text{isf}(q)$: These functions are computed with Newton iterations where the starting values are from the corresponding Boost functions (in double precision).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.HalperinPdf(x, rho, k, nu)
ereal('5.235987755982988730 7E-1')
>>> math53.HalperinPdf(x, rho, k, nu)
ereal('5.351847902755998475 4E-1')
```

```
>>> from xlcalcnet import math53
>>> math53.HalperinPdf(x, rho, k, nu)
ereal('5.235987755982988730 7E-1')
>>> math53.HalperinPdf(x, rho, k, nu)
ereal('5.351847902755998475 4E-1')

>>> from xlcalcnet import math53
>>> math53.HalperinCdf(x, rho, k, nu)
ereal('5.235987755982988730 7E-1')
>>> math53.HalperinCdf(x, rho, k, nu)
ereal('5.351847902755998475 4E-1')

>>> from xlcalcnet import math53
>>> math53.HalperinQtf(q, rho, k, nu)
ereal('5.235987755982988730 7E-1')
>>> math53.HalperinQtf(q, rho, k, nu)
ereal('5.351847902755998475 4E-1')
```

33.1.12 Studentized range distribution: pdf, cdf, qtf, boost class

`math53lib.StdrangePdf`(*x*, *k*, *nu*)

`math53lib.StdrangeCdf`(*x*, *k*, *nu*)

`math53lib.StdrangeQtf`(*q*, *k*, *nu*)

`math53lib.StdrangeDist`(*k*, *nu*)

Returns the pdf, cdf, qtf or boost class of a random variable X, following a studentized range distribution, with $k \geq 2$ groups, ν error degrees of freedom, and the support interval $(0, +\infty)$, and $0 \leq q \leq 1$. See also Wikipedia [1213], Harter [362], Team [533].

$$\text{pdf}(x) = \int_0^\infty f_{\text{nrange}}(sx, k) \cdot s\sqrt{\nu} \cdot f_\chi\left(s\sqrt{\nu}, \nu\right)\ ds$$

where $f_{\text{nrange}}(\cdot, k)$ is the pdf of the normal range with k groups (see *nrange_pdf()*), and $f_\chi(\cdot, \nu)$ is the pdf of the χ-distribution with ν degrees of freedom.

$$\text{cdf}(x) = \int_0^\infty F_{\text{nrange}}(sx, k) \cdot \sqrt{\nu} \cdot f_\chi\left(s\sqrt{\nu}, \nu\right)\ ds$$

where $F_{\text{nrange}}(\cdot, k)$ is the cdf of the normal range with k groups (see *nrange_cdf()*), and $f_\chi(\cdot, \nu)$ is the pdf of the χ-distribution with ν degrees of freedom.

$$\text{sf}(x) = 1 - \text{cdf}(x)$$

There is no known explicit expression for $\text{qtf}(q)$ or $\text{isf}(q)$: These functions are computed with Newton iterations where the starting values are from the corresponding Boost functions (in double precision).

An example in Python

```
>>> from xlcalcnet import math53
>>> math53.StdrangePdf(x, k, nu)
ereal('5.2359877559829887307E-1')
>>> math53.StdrangePdf(x, k, nu)
ereal('5.3518479027559984754E-1')
```

```
>>> from xlcalcnet import math53
>>> math53.StdrangePdf(x, k, nu)
ereal('5.2359877559829887307E-1')
>>> math53.StdrangePdf(x, k, nu)
ereal('5.3518479027559984754E-1')

>>> from xlcalcnet import math53
>>> math53.StdrangeCdf(x, k, nu)
ereal('5.2359877559829887307E-1')
>>> math53.StdrangeCdf(x, k, nu)
ereal('5.3518479027559984754E-1')

>>> from xlcalcnet import math53
>>> math53.StdrangeQtf(q, k, nu)
ereal('5.2359877559829887307E-1')
>>> math53.StdrangeQtf(q, k, nu)
ereal('5.3518479027559984754E-1')
```

33.2 Discrete (lattice) distribution functions related to (stratified) rank tests

33.2.1 Kendall S (or tau) distribution (under H_0), pmf vector

`math53lib.KendallTauPmfVector`(*x*, *n*, *lambda*)

Returns the vector of all pmf values of the Kendall S (or tau) distribution under H_0. The vector is returned as a nested list of Decimals or as a mp.matrix or as a iv.matrix. See also Wikipedia [1177], Noether [422], vandeWiel [785].

Returns pmf(x), the probability mass function (pmf) of a random variable X, following a Kendall tau distribution.

The null distribution can be calculated as follows: Let $p_N(t) = \Pr[T_N = t]$. Then the following recurrence relation holds:

$$p_N(t) = p_N(t-1) + [p_{N-1}(t) - p_{N-1}(t-N)]/N,$$

where $p_N(t) = 0$ for $t < 0$ or $t > N(N-1)/2$, and $p_N(0) = 1/N!$.

33.2.2 Mann-Whitney U distribution (under H_0), pmf vector

`math53lib.MannWhitneyUPmfVector`(*x*, *n*, *lambda*)

Returns the vector of all pmf values of the Mann-Whitney U distribution under H_0. The vector is returned as a nested list of Decimals or as a mp.matrix or as a iv.matrix.

See also Wikipedia [1180], Murakami and Kamakura [418], Robillard [480], [vandeWiel2000` and Zimmermann [1495].

Returns pmf(x), the probability mass function (pmf) of a random variable X, following a Mann-Whitney U distribution. The null distribution of the MW test can be calculated as follows: Let $p_{n,m}(u)$ denote the probability that $U = u$ in samples of size n and m. Then (see Zimmermann [1495])

$$(m+n)p_{n,m}(u) = np_{n-1,m}(u-m) + mp_{n,m-1}(u) = np_{n-1,m}(u) + mp_{n,m-1}(u-n)$$

33.2.3 Jonckheere-Terpsta S distribution (under H_0), pmf vector

`math53lib.JTerpstaSPmfVector`(*x*, *n*, *lambda*)

Returns the vector of all pmf values of the Jonckheere-Terpsta S distribution under H_0. The vector is returned as a nested list of Decimals or as a mp.matrix or as a iv.matrix.

See also Wikipedia [1176], Murakami and Kamakura [418], Robillard [480], [vandeWiel2000` and Skillings [499].

Returns pmf(x), the probability mass function (pmf) of a random variable X, following a Jonckheere-Terpsta S distribution. Let $p(n_1, \ldots, n_k; t) = \Pr[J_N = t]$. If J_N is based on k independent samples of sizes $n_1, \ldots, n_k$, then (Skillings 1980):

$$p(n_1, \ldots, n_k; t) = \sum_x p(n_1, \ldots, n_k; x) \times p(n_1, \ldots, n_k; t-x)$$

where the sum is over all x with positive $p(\cdot)$.

33.2.4 Spearman ρ distribution (under H_0), pmf vector

`math53lib.SpearmanRhoPmfVector`(*x*, *n*, *lambda*)

Returns the vector of all pmf values of the Page L distribution under H_0. The vector is returned as a nested list of Decimals or as a mp.matrix or as a iv.matrix.

See also Wikipedia [1176], [vandeWiel2000` and Skillings [499] .

Returns pmf(x), the probability mass function (pmf) of a random variable X, following a Jonckheere-Terpsta S distribution. Let $p(n_1, \ldots, n_k; t) = \Pr[J_N = t]$. If J_N is based on k independent samples of sizes $n_1, \ldots, n_k$, then (Skillings 1980):

$$p(n_1, \ldots, n_k; t) = \sum_x p(n_1, \ldots, n_k; x) \times p(n_1, \ldots, n_k; t - x)$$

where the sum is over all x with positive $p(\cdot)$.

33.2.5 Sign test distribution (under H_0), pmf vector

`math53lib.SigntestPmfVector(x, n, lambda)`

Returns the vector of all pmf values of the Sign test distribution under H_0. The vector is returned as a nested list of Decimals or as a mp.matrix or as a iv.matrix.

See also Wikipedia [1190], [vandeWiel2000`, Bennett [29] and Zimmermann [1494].

Returns pmf(x), the probability mass function (pmf) of a random variable X, following a Wilcoxon signed rank T distribution. The null distribution can be calculated as follows: Let $p_N(w)$ denote the probability $\Pr[W_N = w]$ in a sample of size N. Then the following recurrence relation holds (see Zimmermann [1494]) :

$$p_N(w) = \tfrac{1}{2}\left(p_{N-1}(w) + p_{N-1}(w - N)\right).$$

33.2.6 Wilcoxon T distribution (under H_0), pmf vector

`math53lib.WilcoxonPmfVector(x, n, lambda)`

Returns the vector of all pmf values of the Wilcoxon distribution under H_0. The vector is returned as a nested list of Decimals or as a mp.matrix or as a iv.matrix.

See also Wikipedia [1190], Fellingham and Stoker [298], [vandeWiel2000`, Bennett [29] and Zimmermann [1494].

Returns pmf(x), the probability mass function (pmf) of a random variable X, following a Wilcoxon signed rank T distribution. The null distribution can be calculated as follows: Let $p_N(w)$ denote the probability $\Pr[W_N = w]$ in a sample of size N. Then the following recurrence relation holds (see Zimmermann [1494]) :

$$p_N(w) = \tfrac{1}{2}\left(p_{N-1}(w) + p_{N-1}(w - N)\right).$$

33.2.7 Page L distribution (under H_0), pmf vector

`math53lib.PageLPmfVector(x, n, lambda)`

Returns the vector of all pmf values of the Page L distribution under H_0. The vector is returned as a nested list of Decimals or as a mp.matrix or as a iv.matrix.

See also Wikipedia [1176], [vandeWiel2000` and Skillings [499].

Returns pmf(x), the probability mass function (pmf) of a random variable X, following a Jonckheere-Terpsta S distribution. Let $p(n_1, \ldots, n_k; t) = \Pr[J_N = t]$. If J_N is based on k independent samples of sizes $n_1, \ldots, n_k$:

$$p(n_1, \ldots, n_k; t) = \sum_x p(n_1, \ldots, n_k; x) \times p(n_1, \ldots, n_k; t - x)$$

where the sum is over all x with positive $p(\cdot)$.

33.2.8 Quade L distribution (under H_0), pmf vector

`math53lib.QuadeLPmfVector(`*x*, *n*, *lambda*`)`

Returns the vector of all pmf values of the Quade L distribution under H_0. The vector is returned as a nested list of Decimals or as a mp.matrix or as a iv.matrix.

See also Wikipedia [1176], [vandeWiel2000` and Skillings [499].

Returns pmf(x), the probability mass function (pmf) of a random variable X, following a Jonckheere-Terpsta S distribution. Let $p(n_1, \ldots, n_k; t) = \Pr[J_N = t]$. If J_N is based on k independent samples of sizes $n_1, \ldots, n_k$:

$$p(n_1, \ldots, n_k; t) = \sum_x p(n_1, \ldots, n_k; x) \times p(n_1, \ldots, n_k; t - x)$$

where the sum is over all x with positive $p(\cdot)$.

33.3 Discrete (non-lattice) distribution functions related to rank tests

33.3.1 Cochran S distribution (under H_0), pmf vector

math53lib.**cochran_s_pmf_vector**(*x*, *n*, *lambda*)

Returns the vector of all pmf values of the Cochran S distribution under H_0. The vector is returned as a nested list of Decimals or as a mp.matrix or as a iv.matrix.

See also Wikipedia [1176], vandeWiel [785], and Skillings [499].

Returns $\text{pmf}_X(x)$, the probability mass function (pmf) of a random variable X, following a Jonckheere-Terpsta S distribution. Let $p(n_1, \ldots, n_k; t) = \Pr[J_N = t]$. If J_N is based on k independent samples of sizes $n_1, \ldots, n_k$, then (Skillings 1980):

$$p(n_1, \ldots, n_k; t) = \sum_x p(n_1, \ldots, n_k; x) \times p(n_1, \ldots, n_k; t - x)$$

where the sum is over all x with positive $p(\cdot)$.

33.3.2 Friedman S distribution (under H_0), pmf vector

math53lib.**friedman_s_pmf_vector**(*x*, *n*, *lambda*)

Returns the vector of all pmf values of the Friedman S distribution under H_0. The vector is returned as a nested list of Decimals or as a mp.matrix or as a iv.matrix.

See also: https://www.statsdirect.com/help/nonparametric_methods/friedman.htm

See also Wikipedia [1176], vandeWiel [785] and Skillings [499].

Returns $\text{pmf}_X(x)$, the probability mass function (pmf) of a random variable X, following a Jonckheere-Terpsta S distribution. Let $p(n_1, \ldots, n_k; t) = \Pr[J_N = t]$. If J_N is based on k independent samples of sizes $n_1, \ldots, n_k$, then (Skillings 1980):

$$p(n_1, \ldots, n_k; t) = \sum_x p(n_1, \ldots, n_k; x) \times p(n_1, \ldots, n_k; t - x)$$

where the sum is over all x with positive $p(\cdot)$.

33.3.3 Quade S distribution (under H_0), pmf vector

math53lib.**quade_s_pmf_vector**(*x*, *n*, *lambda*)

Returns the vector of all pmf values of the Quade S distribution distribution under H_0. The vector is returned as a nested list of Decimals or as a mp.matrix or as a iv.matrix.

See also Wikipedia [1176], vandeWiel [785], and Skillings [499] .

Returns $\text{pmf}_X(x)$, the probability mass function (pmf) of a random variable X, following a Jonckheere-Terpsta S distribution. Let $p(n_1, \ldots, n_k; t) = \Pr[J_N = t]$. If J_N is based on k independent samples of sizes $n_1, \ldots, n_k$, then (Skillings 1980):

$$p(n_1, \ldots, n_k; t) = \sum_x p(n_1, \ldots, n_k; x) \times p(n_1, \ldots, n_k; t - x)$$

where the sum is over all x with positive $p(\cdot)$.

CHAPTER

THIRTYFOUR

INFERENTIAL STATISTICS

General concepts

See also: https://en.wikipedia.org/wiki/Power_of_a_test

See also: https://en.wikipedia.org/wiki/Sample_size_determination

34.1 Basic classical statistical tests (stratified)

34.1.1 Student t-test for 1 sample: tests (p-values) and confidence intervals

`ctx.student_t_1sample_test`(*n*, *mu0*, *mean*, *stdev*, *alpha*, ***kwargs*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Returns tests and/or confidence intervals for Student's t-test for 1 sample with sample size *N* (N), reference mean *mu0* (μ_0), sample mean *mean* ($\overline{x}_1$), sample standard deviation *stdev* (s) and type I error *alpha* (α). See also: Wikipedia [1433].

The following boolean keyword arguments determine the output:

I: if `True`, the input parameters are shown.

D: if `True`, the descriptive statistics is shown.

T: if `True`, the tests are shown.

C: if `True`, the confidence intervals are shown.

Onesided: if `True`, onesided tests and/or confidence intervals are shown.

Twosided: if `True`, onesided tests and/or confidence intervals are shown.

Examples

- Skellam: poisson with same rate back to back
- Laplace: exponential with same rate back to back
- Asymmetric Laplace: exponential with different rates back to back
- Hyperexponential distribution

Examples

1. Skellam: poisson with same rate back to back
2. Laplace: exponential with same rate back to back
3. Asymmetric Laplace: exponential with different rates back to back
4. Hyperexponential distribution

Let $(X_1, X_2, \ldots, X_N)$ denote a random sample of size N from a normal distribution with mean μ and variance σ^2, and let

$$\overline{x}_1 = \frac{1}{N}\sum_{i=1}^{N} X_i \quad \text{and } s^2 = \frac{1}{N-1}\sum_{i=1}^{N}(X_i - \overline{x}_1)^2$$

be the usual sample estimates of the unkown population mean μ and unkown population variance σ^2. Then Student's t-test can be used to test hypotheses concerning μ with regard to a reference value μ_0.

Let $F_t(\cdot, \nu)$ denote the CDF and let $t_{\nu,\alpha}$ denote the α-quantile of the t-distribution with ν degrees of freedom. Define

$$t = \frac{\overline{x}_1 - \mu_0}{s}, \quad s = \sqrt{s_1^2/N}, \quad \nu = N - 1.$$

The test can also be expressed in terms of a correlation coefficient r between the combined X and an indicator variable, where t and r are related by

$$r = \frac{t}{\sqrt{t^2 + \nu}}, \quad t = \nu\frac{r}{1 - r^2}.$$

Then p-values and rejection criteria for H_0 can be calculated as summarized below:

Test problem	p-value	Reject H_0
$H_{01} : \mu \leq \mu_0$ vs $H_{A1} : \mu > \mu_0$	$F_t(-t, \nu)$	$t > t_{\nu;1-\alpha}$
$H_{02} : \mu \geq \mu_0$ vs $H_{A2} : \mu < \mu_0$	$F_t(t, \nu)$	$t > t_{\nu;\alpha}$
$H_{03} : \mu = \mu_0$ vs $H_{A3} : \mu \neq \mu_0$	$F_t(t, \nu) - F_t(-t, \nu)$	$t > t_{\nu;1-\alpha/2}$ or $t > t_{\nu;\alpha/2}$

Let $A_1 = t_{\nu,\alpha} \cdot s$ and $A_2 = t_{\nu,\alpha/2} \cdot s$. Then the confidence intervals at confidence level $1 - \alpha$ can be calculated as follows:

Type	Confidence Interval (Difference of Means)
Left-sided	$-\infty \leq \mu_1 - \mu_0 \leq (\overline{x}_1 - \mu_0) + A_1$
Right-sided	$(\overline{x}_1 - \mu_0) - A_1 \leq \mu_1 - \mu_0 \leq +\infty$
Two-sided	$(\overline{x}_1 - \mu_0) - A_2 \leq \mu_1 - \mu_0 \leq (\overline{x}_1 - \mu_0) + A_2$

Examples

An actual call to the function, requesting Student's t-test for 1 independent sample of size 10 and standard deviation 1 each, with means 2.3 and reference mean = 1.0, and a type I error $\alpha = 0.05$ would be

```
>>> from xlcalcnet import mpm
>>> n = 16; mu0 = 4.05; mean = 5.24; stdev = 1.5; alpha=0.05
>>> mpm.student_t_1sample_test(n, mu0, mean, stdev, alpha, \
  I=True, D=True, T=True, C=True, Onesided=True, Twosided = True)
Student t-test for 1 sample: tests and confidence intervals
                          Parameter  Variable1
                                  n: [16.0]
                               mean: [5.24]
                                mu0: [4.05]
                              stdev: [1.5]
                              alpha: [0.05]
                 degrees of freedom: [15.0]
               difference of means: [1.19]
```

(continues on next page)

(continued from previous page)

```
       rho-tilde = (mean-mu0)/stdev: [0.7933333]
                   t-value (=delta): [3.173333]
                t(1-alpha, 1-sided): [1.75305]
                t(1-alpha, 2-sided): [2.13145]
    test, p-value (H01: mu1 >= mu0): [0.9968508]
    test, p-value (H02: mu1 <= mu0): [0.003149208]
     test, p-value (H03: mu1 = mu2): [0.006298416]
mu1 - mu0, CI upper limit (1-sided): [1.847394]
mu1 - mu0, CI lower limit (1-sided): [0.5326061]
mu1 - mu0, CI upper limit (2-sided): [1.989294]
mu1 - mu0, CI lower limit (2-sided): [0.3907064]
     mu1 - mu0, CI-length (2-sided): [1.598587]
```

An actual call to the function, requesting Student's t-test with description, the critical value for a two-sided test, the p-value for H_{03} for 2 independent samples of size 10 and standard deviation 1 each, with means 2.3 and 4.5, and a type I error $\alpha = 0.05$ would be

```
>>> from xlcalcnet import mpm
>>> n = [10, 20, 30]; mu0 = 1.0; mean = [4.5,4.6]; stdev = [1,2,3,4]; alpha=0.015
>>> mpm.student_t_1sample_test(n, mu0, mean, stdev, alpha, \
  I=True, D=True, T=True, C=True, Onesided=True, Twosided = True)
Student t-test for 1 sample: tests and confidence intervals
                          Parameter  Variable1
                                  n: [10.0 20.0 30.0 30.0]
                               mean: [4.5 4.6 4.6 4.6]
                                mu0: [1.0 1.0 1.0 1.0]
                              stdev: [1.0 2.0 3.0 4.0]
                              alpha: [0.015 0.015 0.015 0.015]
                 degrees of freedom: [9.0, 19.0, 29.0, 29.0]
                difference of means: [3.5, 3.6, 3.6, 3.6]
       rho-tilde = (mean-mu0)/stdev: [3.5, 1.8, 1.2, 0.9]
                   t-value (=delta): [11.06797, 8.049845, 6.572671, 4.929503]
                t(1-alpha, 1-sided): [2.573804, 2.345648, 2.282175, 2.282175]
                t(1-alpha, 2-sided): [2.998203, 2.674209, 2.585992, 2.585992]
    test, p-value (H01: mu1 >= mu0): [0.9999992, 0.9999999, 0.9999998, 0.9999846]
    test, p-value (H02: mu1 <= mu0): [7.642012e-7, 7.64034e-8, 1.67689e-7, 1.542853e-5]
     test, p-value (H03: mu1 = mu2): [1.528402e-6, 1.528068e-7, 3.35378e-7, 3.085705e-5]
mu1 - mu0, CI upper limit (1-sided): [4.313908, 4.649005, 4.849998, 5.266665]
mu1 - mu0, CI lower limit (1-sided): [2.686092, 2.550995, 2.350002, 1.933335]
mu1 - mu0, CI upper limit (2-sided): [4.448115, 4.795942, 5.016406, 5.488542]
mu1 - mu0, CI lower limit (2-sided): [2.551885, 2.404058, 2.183594, 1.711458]
     mu1 - mu0, CI-length (2-sided): [1.89623, 2.391885, 2.832812, 3.777083]
```

34.1.2 Student t-test for 1 sample: power calculations

`ctx.student_t_1sample_power`(*n*, *mu0*, *mu1*, *sigma*, *alpha*, ***kwargs*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Returns power calculations for Student's t-test for 1 sample with sample size *N* (N), reference mean *mu0* (μ_0), population mean *mu1* (μ_1), population standard deviation *sigma* (σ) and type I error *alpha* (α). See also: Wikipedia [1433].

The following boolean keyword arguments determine the output:

I: if `True`, the input parameters are shown.

D: if `True`, the descriptive statistics is shown.

P: if `True`, the power calculations are shown.

E: if `True`, some extra calculations are shown.

Onesided: if `True`, onesided tests are shown.

Twosided: if `True`, twosided tests are shown.

Let $\sigma_1^2 = \sigma^2$ and $\nu = N - 1$ and define $\widetilde{\rho} = \dfrac{\mu_1 - \mu_0}{\sigma}$ and $\delta = \sqrt{N}\widetilde{\rho}$. Let $F_{t'}(\cdot, \nu, \delta)$ denote the CDF of the noncentral t-distribution with ν degrees of freedom and noncentrality parameter δ and let $t_{\nu,\alpha}$ denote the α-quantile of the central t-distribution with ν degrees of freedom. Then the power for accepting H_A at the confidence level α can be calculated as summarized below:

Test	Null Hypothesis	Alternative	Power
onesided	$H_{01} : \mu \leq \mu_0$	$H_{A1} : \mu > \mu_0$	$F_{t'}\left(-t_{\nu;1-\alpha}, \nu, \delta\right)$
onesided	$H_{02} : \mu \geq \mu_0$	$H_{A2} : \mu < \mu_0$	$F_{t'}\left(t_{\nu;1-\alpha}, \nu, \delta\right)$
twosided	$H_{03} : \mu = \mu_0$	$H_{A1} : \mu > \mu_0$	$F_{t'}\left(-t_{\nu;1-\alpha/2}, \nu, \delta\right)$
twosided	$H_{03} : \mu = \mu_0$	$H_{A2} : \mu < \mu_0$	$F_{t'}\left(t_{\nu;1-\alpha/2}, \nu, \delta\right)$
twosided	$H_{03} : \mu = \mu_0$	$H_{A3} : \mu \neq \mu_0$	$F_{t'}\left(t_{\nu;1-\alpha/2}, \nu, \delta\right) - F_t\left(-t_{\nu;1-\alpha/2}, \nu\,\delta\right)$

Examples

An actual call to the function, requesting Student's t-test with description, the critical calue for a two-sided test, the power for H_{A3} for 2 independent samples of size 10 and standard deviation 1 each, with means 2.3 and 4.5, and a type I error $\alpha = 0.05$ would be

```
>>> from xlcalcnet import mpm
>>> n = 56; mu0 = 4.05; mu1 = 5.24; sigma = 1.5; alpha=0.05
>>> mpm.student_t_1sample_power(n, mu0, mu1, sigma, alpha, \
  I=True, D=True, T=True, C=True, Onesided=True, Twosided = True)
Student t-test for 1 sample: power
                           Parameter  variable1
                                   n: [56.0]
                                mu0: [4.05]
                                mu1: [5.24]
                              sigma: [1.5]
                              alpha: [0.05]
                 degrees of freedom: [55.0]
                           mu1 - mu0: [1.19]
                                 rho: [0.6249392]
                               delta: [5.936763]
              t(1-alpha, 1-sided): [1.673034]
```

(continues on next page)

(continued from previous page)

```
                 t(1-alpha, 2-sided): [2.004045]
 1-sided test, power (HA1: mu1 < mu2): 7.46e-08
 1-sided test, power (HA2: mu1 > mu2): 0.974564
 2-sided test, power (HA1: mu1 < mu2): 1.65e-08
 2-sided test, power (HA2: mu1 > mu2): 0.943648
2-sided test, power (HA1: mu1 <> mu2): 0.943648
                   Pr(Mean1 < Mean2): 9.92e-05
                   Pr(Mean1 > Mean2): 0.999901
```

Another example

```
>>> from xlcalcnet import mpm
>>> n = [10, 20, 30]; mu0 = 1.0; mu1 = [4.5,4.6]; sigma = [1,2,3,4]; alpha=0.015
>>> mpm.student_t_1sample_power(n, mu0, mu1, sigma, alpha, \
  I=True, D=True, T=True, C=True, Onesided=True, Twosided = True)
Student t-test for 1 sample: power
                           Parameter  variable1
                                   n: [10.0 20.0 30.0 30.0]
                                 mu0: [1.0 1.0 1.0 1.0]
                                 mu1: [4.5 4.6 4.6 4.6]
                               sigma: [1.0 2.0 3.0 4.0]
                               alpha: [0.015 0.015 0.015 0.015]
                 degrees of freedom: [9.0, 19.0, 29.0, 29.0]
                           mu1 - mu0: [3.5, 3.6, 3.6, 3.6]
                                 rho: [0.965173, 0.8793576, 0.7735231, 0.675211]
                               delta: [11.06797, 8.049845, 6.572671, 4.929503]
                t(1-alpha, 1-sided): [2.573804, 2.345648, 2.282175, 2.282175]
                t(1-alpha, 2-sided): [2.998203, 2.674209, 2.585992, 2.585992]
 1-sided test, power (HA1: mu1 < mu2): 7.46e-08
 1-sided test, power (HA2: mu1 > mu2): 0.974564
 2-sided test, power (HA1: mu1 < mu2): 1.65e-08
 2-sided test, power (HA2: mu1 > mu2): 0.943648
2-sided test, power (HA1: mu1 <> mu2): 0.943648
                   Pr(Mean1 < Mean2): 9.92e-05
                   Pr(Mean1 > Mean2): 0.999901
```

34.1.3 Student t-test for 1 sample: sample size calculation

`ctx.student_t_1sample_samplesize`(*mu0*, *mu1*, *sigma*, *alpha*, *beta*, ***kwargs*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Returns sample size calculations for Student's t-test for 1 sample with reference mean *mu0* (μ_0), population mean *mu1* (μ_1), population standard deviation *sigma* (σ), type I error *alpha* (α), and type II error *beta* (β). See also: Wikipedia [1433].

The following boolean keyword arguments determine the output:

I: if `True`, the input parameters are shown.

D: if `True`, the descriptive statistics is shown.

N: if `True`, the sample size calculations are shown.

P: if `True`, the actual power (for the calculated sample size) is shown.

Onesided: if `True`, onesided tests are shown.

Twosided: if `True`, twosided tests are shown.

Let $N_{t'}(\alpha, \beta, \widetilde{\rho})$ denote the sample size function of the (singly) noncentral t-distribution for a given type I error α, type II error β and noncentrality parameter $\widetilde{\rho} = \dfrac{\mu_1 - \mu_0}{\sigma}$. The required total sample size N can be calculated as summarized below. Note that the returned value of N will in general not be an integer, and rounding up may be required.

Test	Null Hypothesis	Alternative	Minimal sample size
onesided	$H_{01} : \mu \leq \mu_0$	$H_{A1} : \mu > \mu_0$	$N_{t'}(\alpha, \beta, \widetilde{\rho})$
onesided	$H_{02} : \mu \geq \mu_0$	$H_{A2} : \mu < \mu_0$	$N_{t'}(\alpha, \beta, -\widetilde{\rho})$
twosided	$H_{03} : \mu = \mu_0$	$H_{A1} : \mu > \mu_0$	$N_{t'}(\alpha, \beta, \widetilde{\rho})$
twosided	$H_{03} : \mu = \mu_0$	$H_{A2} : \mu < \mu_0$	$N_{t'}(\alpha, \beta, -\widetilde{\rho})$
twosided	$H_{03} : \mu = \mu_0$	$H_{A3} : \mu \neq \mu_0$	$N^{(2)}_{t'}(\alpha, \beta, \widetilde{\rho})$

Examples

An actual call to the function, requesting an upper sample size estimate (and actual power) for $\alpha = 0.95$, $\beta = 0.1$, and standard deviations $\sigma_1 = \sigma_2 = 1$, means $\mu_1 = 2.3$ and $\mu_2 = 4.5$, would be

```
>>> from xlcalcnet import mpm
>>> math53.StudentT1CI(mu1:=5.24, mu0:=4.05, sd:=1.5, alpha:=0.05, beta:=0.1)
                                    df: 21
                        difference of means: 1.19
                           t-value (=delta): 3.721063
                        t(1-alpha, 1-sided): 1.720743
                        t(1-alpha, 2-sided): 2.079614
  1-sided test, required N (HA1: mu1 < mu2): 18
1-sided test, actual power (HA1: mu1 < mu2): 0.974564
  1-sided test, required N (HA2: mu1 > mu2): 148
1-sided test, actual power (HA2: mu1 > mu2): 0.964564
  2-sided test, required N (HA1: mu1 < mu2): 22
2-sided test, actual power (HA1: mu1 < mu2): 0.954564
  2-sided test, required N (HA2: mu1 > mu2): 212
2-sided test, actual power (HA2: mu1 > mu2): 0.977456
  2-sided test, required N (HA2: mu1 <>mu2): 24
2-sided test, actual power (HA2: mu1 <>mu2): 0.955544
```

34.1.4 Chi-squared-test for the variance of 1 sample: tests (p-values)

`ctx.chi2_variance_1sample_test`(*x*, *k*, *n*, *method='default'*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Text

Then p-values and rejection criteria for H_0 can be calculated as summarized below

Test problem	p-value	Reject H_0
$H_{01} : \sigma \leq \sigma_0$ vs $H_{A1} : \sigma > \sigma_0$	$F_t\left(-t, \nu\right)$	$t > t_{\nu;1-\alpha}$
$H_{02} : \sigma \geq \sigma_0$ vs $H_{A2} : \sigma < \sigma_0$	$F_t\left(t, \nu\right)$	$t > t_{\nu;\alpha}$
$H_{03} : \sigma = \sigma_0$ vs $H_{A3} : \sigma \neq \sigma_0$	$F_t\left(t, \nu\right) - F_t\left(-t, \nu\right)$	$t > t_{\nu;1-\alpha/2}$ or $t > t_{\nu;\alpha/2}$

```
>>> from xlcalcnet import mpm
>>> math53.StudentT1Test(mean:=5.24, mean0:=4.05, sd:=1.5, n:=22, resultstring:='All')

Input
Variable Variable 1
Common N 22
Mean. Group 1 5.24
Mean. Group 2 4.05
StDev. Group 1 1.5
StDev. Group 2 3.5

Chi2-test for the variance of 1 sample
Parameter Result
df 21
Variance-Ratio 0.183673469
Chi2-value 3.857142857
Chi2. 1 - alpha(1 - sided) 10.28289778
Chi2 . 1 - alpha(2 - sided) 35.47887591
Chi2-test. p-value (H01: s1 >= s0) 1.44636E-05
Chi2-test. p-value (H02: s1 <= s0) 0.999985536
Chi2-test. p-value (H03: s1 = s0) 2.89273E-05
```

34.1.5 Chi-squared-test for the variance of 1 sample: confidence intervals

`ctx.chi2_variance_1sample_ci`(*x*, *k*, *n*, *method='default'*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Text

Then confidence intervals can be calculated as summarized below

Type	Confidence Interval (Difference of Means)
Left-sided	$-\infty \leq \sigma_1 - \sigma_0 \leq (\overline{x}_1 - \sigma_0) + A_1$
Right-sided	$(\overline{x}_1 - \sigma_0) - A_1 \leq \sigma_1 - \sigma_0 \leq +\infty$
Two-sided	$(\overline{x}_1 - \sigma_0) - A_2 \leq \sigma_1 - \sigma_0 \leq (\overline{x}_1 - \sigma_0) + A_2$

```
>>> from xlcalcnet import mpm
>>> math53.StudentT1Test(mean:=5.24, mean0:=4.05, sd:=1.5, n:=22, resultstring:='All')

Input
Variable Variable 1
Common N 22
Mean. Group 1 5.24
Mean. Group 2 4.05
StDev. Group 1 1.5
StDev. Group 2 3.5
Type 1 Error 0.05

Chi2-test for the variance of 1 sample. CI
Parameter Result
df 21
Variance-Ratio 0.183673469
Chi2-value 3.857142857
Chi2. 1 - alpha(1 - sided) 10.28289778
Chi2 . 1 - alpha(2 - sided) 35.47887591
s1. CI - Length(2 - sided) 3.263229852
s1. CI Upper Limit (2-sided) 4.595008236
s1. CI Lower Limit (2-sided) 1.331778383
```

34.1.6 Chi-squared-test for the variance of 1 sample: power

`ctx.chi2_variance_1sample_power`(*x*, *k*, *n*, *method='default'*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Returns the results of the Chi-squared-test for the variance of 1 sample, under H_0.

Then the power for accepting H_A at the confidence level α can be calculated as summarized below:

Test	Null Hypothesis	Alternative	Power
1 sided	$H_{01} : \sigma \leq \sigma_0$	$H_{A1} : \sigma > \sigma_0$	$F_{t'}\left(-t_{\nu;1-\alpha}, \nu, \delta\right)$
1 sided	$H_{02} : \sigma \geq \sigma_0$	$H_{A2} : \sigma < \sigma_0$	$F_{t'}\left(t_{\nu;1-\alpha}, \nu, \delta\right)$
2 sided	$H_{03} : \sigma = \sigma_0$	$H_{A1} : \sigma > \sigma_0$	$F_{t'}\left(-t_{\nu;1-\alpha/2}, \nu, \delta\right)$
2 sided	$H_{03} : \sigma = \sigma_0$	$H_{A1} : \sigma > \sigma_0$	$F_{t'}\left(t_{\nu;1-\alpha/2}, \nu, \delta\right)$
2 sided	$H_{03} : \sigma = \sigma_0$	$H_{A3} : \sigma \neq \sigma_0$	$F_{t'}\left(t_{\nu;1-\alpha/2}, \nu, \delta\right) - F_t\left(-t_{\nu;1-\alpha/2}, \nu\,\delta\right)$

```
>>> from xlcalcnet import mpm
>>> math53.StudentT1Test(mean:=5.24, mean0:=4.05, sd:=1.5, n:=22, resultstring:='All')

Input
Variable Variable 1
Common N 22
Mean, Group 1 5,24
Mean, Group 2 4,05
StDev, Group 1 1,5
StDev, Group 2 3,5
Type 1 Error 0,05

Chi2-test for the variance of 1 sample , power
Parameter Result
df 21
Variance-Ratio 0,183673469
Chi2-value 3,857142857
Chi2, 1 - alpha(1 - sided) 10,28289778
Chi2 , 1 - alpha(2 - sided) 35,47887591
1-sided test, power (HA1: s1 < s0) 1,44636E-05
1-sided test, power (HA2: s1 > s0) 1,44636E-05
2-sided test, power (HA1: s1 < s0) 1,44636E-05
2-sided test, power (HA2: s1 > s0) 1,44636E-05
2-sided test, power (HA3: s1 <> s0) 1,44636E-05
```

34.1.7 Chi-squared-test for the variance of 1 sample: sample size

`ctx.chi2_variance_1sample_samplesize`(*x*, *k*, *n*, *method='default'*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Returns the results of the Chi-squared-test for the variance of 1 sampl, under H_0.

The required total sample size N can be calculated as summarized below

Test	Null Hypothesis	Alternative	Minimal sample size
1 sided	$H_{01} : \sigma \leq \sigma_0$	$H_{A1} : \sigma > \sigma_0$	$N_{t'}\left(\alpha, \beta, \widetilde{\rho}\right)$
1 sided	$H_{02} : \sigma \geq \sigma_0$	$H_{A2} : \sigma < \sigma_0$	$N_{t'}\left(\alpha, \beta, \widetilde{\rho}\right)$
2 sided	$H_{03} : \sigma = \sigma_0$	$H_{A1} : \sigma > \sigma_0$	$N_{t'}\left(\alpha, \beta, \widetilde{\rho}\right)$
2 sided	$H_{03} : \sigma = \sigma_0$	$H_{A1} : \sigma > \sigma_0$	$N_{t'}\left(\alpha, \beta, \widetilde{\rho}\right)$
2 sided	$H_{03} : \sigma = \sigma_0$	$H_{A3} : \sigma \neq \sigma_0$	$N2_{t'}\left(\alpha, \beta, \widetilde{\rho}\right)$

Note that the returned value of N will in general not be an integer, and rounding up may be required.

34.2 Basic classical statistical tests for 2 independent samples (stratified)

34.2.1 Student t-test for 2 independent samples: tests (p-values)

`ctx.studentt_2isamples_test`(*mean*, *sd*, *n*, *alpha=0.05*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Returns results for Student's t-test for for 2 independent samples.

See also: https://en.wikipedia.org/wiki/Student%27s_t-test#Independent_(unpaired)_samples

Parameters:

Mean
The mean of the sample.

Sd
The standard deviation of the sample

N
The sample size

Alpha
The alpha-level used for confidence intervals

Let $(X_1, X_2, \ldots, X_N)$ denote a random sample of size N from a normal distribution with mean μ and variance σ^2, and let

$$\overline{x}_1 = \frac{1}{N}\sum_{i=1}^{N} X_i \quad \text{and } s^2 = \frac{1}{N-1}\sum_{i=1}^{N}(X_i - \overline{x}_1)$$

be the usual sample estimates of the unkown population mean μ and unkown population variance σ^2. Then Student's t-test can be used to test hypotheses concerning μ with regard to a reference value μ_2.

Let $F_t(\cdot, \nu)$ denote the CDF (see section ref{tDistributionCDF}) and let $t_{\nu,\alpha}$ denote the α-quantile (see section ref{tDistributionQuantile}) of the t-distribution with ν degrees of freedom. Define

$$t = \frac{\overline{x}_1 - \mu_2}{s}, \quad s = \sqrt{s_1^2/N}, \quad \nu = N - 1.$$

Then p-values and rejection criteria for H_0 can be calculated as summarized below

Test problem	p-value	Reject H_0
$H_{01} : \mu_1 \leq \mu_2$ vs $H_{A1} : \mu_1 > \mu_2$	$F_t(-t, \nu)$	$t > t_{\nu;1-\alpha}$
$H_{02} : \mu_1 \geq \mu_2$ vs $H_{A2} : \mu_1 < \mu_2$	$F_t(t, \nu)$	$t > t_{\nu;\alpha}$
$H_{03} : \mu_1 = \mu_2$ vs $H_{A3} : \mu_1 \neq \mu_2$	$F_t(t, \nu) - F_t(-t, \nu)$	$t > t_{\nu;1-\alpha/2}$ or $t > t_{\nu;\alpha/2}$

The test can also be expressed in terms of a correlation coefficient r between the combined X and an indicator variable, where t and r are related by

$$r = \frac{t}{\sqrt{t^2 + \nu}}, \quad t = \nu\frac{r}{1 - r^2}.$$

An actual call to the function, requesting Student's t-test with description, the critical value for a two-sided test, the p-value for H_{03} (in the case of TTest this is $\mu_1 \neq \mu_2$), for 2 independent samples of size 10 and standard deviation 1 each, with means 2.3 and 4.5, and a type I error $\alpha = 0.05$ would be

```
>>> from xlcalcnet import mpm
>>> math53.StudentT1Test(means:=[5.24, 4.05], sd:=1.5, n:=22)

Input
Variable Variable 1
Common N 22
Mean. Group 1 5.24
Mean. Group 2 4.05
StDev. Group 1 1.5
StDev. Group 2 3.5

Student's t-test for 2 samples
Parameter Result
df 42
Difference of means 1.19
t-value (=delta) 1.465798594
t1 - alpha(1 - sided) 1.681952357
t1 - alpha(2 - sided) 2.018081703
test. p-value (H01: μ1 >= μ2) 0.924924828
test. p-value (H02: μ1 <= μ2) 0.075075172
test. p-value (H03: μ1 = μ2) 0.150150344
```

34.2.2 Student t-test for 2 independent samples: confidence intervals

`ctx.studentt_2isamples_ci`(*mean*, *sd*, *n*, *alpha=0.05*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Returns results for Student's t-test for for 2 independent samples.

Parameters:

Mean
The mean of the sample.

Sd
The standard deviation of the sample

N
The sample size

Alpha
The alpha-level used for confidence intervals

Let $A_1 = t_{\nu,\alpha} \cdot s$ and $A_2 = t_{\nu,\alpha/2} \cdot s$, where s and ν are defined in (ref{eq:TTest1}), and $t_{\nu,\alpha}$ denotes the α-quantile of the (central) t-distribution with ν degrees of freedom (see section ref{tDistributionQuantile}).

Type	Confidence Interval (Difference of Means)
Left-sided	$-\infty \leq \mu_1 - \mu_2 \leq (\overline{x}_1 - \mu_2) + A_1$
Right-sided	$(\overline{x}_1 - \mu_2) - A_1 \leq \mu_1 - \mu_2 \leq +\infty$
Two-sided	$(\overline{x}_1 - \mu_2) - A_2 \leq \mu_1 - \mu_2 \leq (\overline{x}_1 - \mu_2) + A_2$

An actual call to the function, requesting Student's t-test with description, the critical value for a two-sided test, the p-value for H_{03} (in the case of textsf{TTest} this is $\mu_1 \neq \mu_2$), for 2 independent samples of size 10 and standard deviation 1 each, with means 2.3 and 4.5, and a type I error $\alpha = 0.05$ would be

```
>>> from xlcalcnet import mpm
>>> math53.StudentT1CI(mean:=5.24, mean0:=4.05, sd:=1.5, n:=22, alpha=0.05, resultstring)

Input
Variable Variable 1
Common N 22
Mean. Group 1 5.24
Mean. Group 2 4.05
StDev. Group 1 1.5
StDev. Group 2 3.5
Type 1 Error 0.05

Student's t-test for 2 samples
Parameter Result
df 42
Difference of means 1.19
t-value (=delta) 1.465798594
t1 - alpha(1 - sided) 1.681952357
t1 - alpha(2 - sided) 2.018081703
μ1 - μ2. CI - Length (2 - sided) 3.276735613
```

(continues on next page)

(continued from previous page)

```
μ1 - μ2. CI Upper Limit (2-sided) 2.828367806
μ1 - μ2. CI Lower Limit (2-sided) -0.448367806
```

34.2.3 Student t-test for 2 independent samples: power

`ctx.studentt_2isamples_power`(*mean*, *sd*, *n*, *alpha=0.05*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Returns the results of Student's t-test for 2 independent samples: power and sample size.

Parameters:

Mean
The mean of the sample.

Sd
The standard deviation of the sample

N
The sample size

Alpha
The alpha-level used for confidence intervals

Let $\sigma_1^2 = \sigma^2$ and $\nu = N - 1$. Define

$$\widetilde{\rho} = \frac{\mu_1 - \mu_2}{\sigma} \text{ and } \delta = \sqrt{N}\widetilde{\rho}.$$

Let $F_{t'}(\cdot, \nu, \delta)$ denote the CDF of the (singly) noncentral t-distribution with ν degrees of freedom and noncentrality parameter δ and let $t_{\nu,\alpha}$ denote the α-quantile of the central t-distribution with ν degrees of freedom. Then the power for accepting H_A at the confidence level α can be calculated as summarized below:

Test	Null Hypothesis	Alternative	Power
1 sided	$H_{01} : \mu_1 \leq \mu_2$	$H_{A1} : \mu_1 > \mu_2$	$F_{t'}\left(-t_{\nu;1-\alpha}, \nu, \delta\right)$
1 sided	$H_{02} : \mu_1 \geq \mu_2$	$H_{A2} : \mu_1 < \mu_2$	$F_{t'}\left(t_{\nu;1-\alpha}, \nu, \delta\right)$
2 sided	$H_{03} : \mu_1 = \mu_2$	$H_{A1} : \mu_1 > \mu_2$	$F_{t'}\left(-t_{\nu;1-\alpha/2}, \nu, \delta\right)$
2 sided	$H_{03} : \mu_1 = \mu_2$	$H_{A1} : \mu_1 > \mu_2$	$F_{t'}\left(t_{\nu;1-\alpha/2}, \nu, \delta\right)$
2 sided	$H_{03} : \mu_1 = \mu_2$	$H_{A3} : \mu_1 \neq \mu_2$	$F_{t'}\left(t_{\nu;1-\alpha/2}, \nu, \delta\right) - F_t\left(-t_{\nu;1-\alpha/2}, \nu\, \delta\right)$

An actual call to the function, requesting Student's t-test with description, the critical calue for a two-sided test, the power for H_{A3} (in the case of textsf{TTest} this is $\mu_1 \neq \mu_2$), for 2 independent samples of size 10 and standard deviation 1 each, with means 2.3 and 4.5, and a type I error $\alpha = 0.05$ would be

```
>>> from xlcalcnet import mpm
>>> math53.StudentT1CI(mu1:=5.24, mu0:=4.05, sd:=1.5, n:=22, alpha:=0.05)

Input
Variable Variable 1
Common N 22
Mean. Group 1 5.24
Mean. Group 2 4.05
StDev. Group 1 1.5
StDev. Group 2 3.5
```

(continues on next page)

(continued from previous page)

```
Type 1 Error 0.05

Student's t-test for 2 samples
Parameter Result
df 42
Difference of means 1.19
t-value (=delta) 1.465798594
t1 - alpha(1 - sided) 1.681952357
t1 - alpha(2 - sided) 2.018081703
1-sided test. power (HA1: μ1 < μ2) 0.001009403
1-sided test. power (HA2: μ1 > μ2) 0.419683559
2-sided test. power (HA1: μ1 < μ2) 0.000345576
2-sided test. power (HA2: μ1 > μ2) 0.298885242
2-sided test. power (HA3: μ1 <> μ2) 0.299230817
test. Pr[Mean 1 < Mean 2] 0.071351582
test. Pr[Mean 1 > Mean 2] 0.928648418
```

34.2.4 Student t-test for 2 independent samples: sample size calculation

`ctx.studentt_2isamples_samplesize`(*mu*, *sd*, *alpha=0.05*, *beta=0.1*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Returns the results of sample size calculations for Student's t-test for 2 independent samples

Parameters:

Mean
The mean of the sample.

Sd
The standard deviation of the sample

N
The sample size

Alpha
The alpha-level used for confidence intervals

Beta
The beta-level used for power

Let $N_{t'}(\alpha, \beta, \widetilde{\rho})$ denote the sample size function of the (singly) noncentral t-distribution (see section ref{NoncentralTDistributionSampleSize}) for a given confidence level α, power β and noncentrality parameter $\widetilde{\rho}$ (as defined in equation ref{eq:TTestPower1}. The required total sample size N can be calculated as summarized below

Test	Null Hypothesis	Alternative	Minimal sample size
1 sided	$H_{01} : \mu_1 \leq \mu_2$	$H_{A1} : \mu_1 > \mu_2$	$N_{t'}(\alpha, \beta, \widetilde{\rho})$
1 sided	$H_{02} : \mu_1 \geq \mu_2$	$H_{A2} : \mu_1 < \mu_2$	$N_{t'}(\alpha, \beta, \widetilde{\rho})$
2 sided	$H_{03} : \mu_1 = \mu_2$	$H_{A1} : \mu_1 > \mu_2$	$N_{t'}(\alpha, \beta, \widetilde{\rho})$
2 sided	$H_{03} : \mu_1 = \mu_2$	$H_{A1} : \mu_1 > \mu_2$	$N_{t'}(\alpha, \beta, \widetilde{\rho})$
2 sided	$H_{03} : \mu_1 = \mu_2$	$H_{A3} : \mu_1 \neq \mu_2$	$N2_{t'}(\alpha, \beta, \widetilde{\rho})$

Note that the returned value of N will in general not be an integer, and rounding up may be required.

An actual call to the function, requesting an upper sample size estimate (and actual power) for $\alpha = 0.95$, $\beta = 0.1$, and standard deviations $\sigma_1 = \sigma_2 = 1$, means $\mu_1 = 2.3$ and $\mu_2 = 4.5$, would be

```
>>> from xlcalcnet import mpm
>>> math53.StudentT1CI(mu1:=5.24, mu0:=4.05, sd:=1.5, alpha:=0.05, beta:=0.1)
                                      df: 21
                        difference of means: 1.19
                           t-value (=delta): 3.721063
                        t(1-alpha, 1-sided): 1.720743
                        t(1-alpha, 2-sided): 2.079614
  1-sided test, required N (HA1: mu1 < mu2): 18
1-sided test, actual power (HA1: mu1 < mu2): 0.974564
  1-sided test, required N (HA2: mu1 > mu2): 148
1-sided test, actual power (HA2: mu1 > mu2): 0.964564
```

(continues on next page)

(continued from previous page)

```
  2-sided test, required N (HA1: mu1 < mu2): 22
2-sided test, actual power (HA1: mu1 < mu2): 0.954564
  2-sided test, required N (HA2: mu1 > mu2): 212
2-sided test, actual power (HA2: mu1 > mu2): 0.977456
  2-sided test, required N (HA2: mu1 <>mu2): 24
2-sided test, actual power (HA2: mu1 <>mu2): 0.955544
```

34.2.5 Student t-test for 2 independent samples: power and sample size: failure to stratify

ctx.**studentt_2isamples_power2**(*mean*, *sd*, *n*, *alpha=0.05*)

Returns the results of the F-Test with $\delta > 0$ and $\eta > 0$

See "Butler Paolella 1999 Doubly noncentral F Draft.pdf" in "References B" for an example.

34.2.6 Student t-test for 2 independent samples: equivalence and non-inferiority

`ctx.studentt_2isamples_equivalence`(*x*, *k*, *n*, *method='default'*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Returns the results of the Sign test, under H_0.

Refer to Schuirman procedure.

See Shieh 2019

See also: https://www.ncbi.nlm.nih.gov/pmc/articles/PMC5012670/

34.2.7 F-test for the variances of 2 independent samples: tests (p-values)

`ctx.fratio_variance_2isamples_test`(*s2*, *n*, *alpha=0.05*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Returns results for the F-test for the variances of 2 independent samples.

See also: https://en.wikipedia.org/wiki/F-test_of_equality_of_variances

Parameters:

Sd
The standard deviation of the sample

N
The sample size

Alpha
The alpha-level used for confidence intervals

Let $(X_1, X_2, \ldots, X_N)$ denote a random sample of size N from a normal distribution with mean σ and variance σ^2, and let

$$\overline{x}_1 = \frac{1}{N}\sum_{i=1}^{N} X_i \quad \text{and } s^2 = \frac{1}{N-1}\sum_{i=1}^{N}(X_i - \overline{x}_1)$$

be the usual sample estimates of the unkown population mean σ and unkown population variance σ^2. Then Student's t-test can be used to test hypotheses concerning σ with regard to a reference value σ_2.

Let $F_t(\cdot, \nu)$ denote the CDF (see section ref{tDistributionCDF}) and let $t_{\nu,\alpha}$ denote the α-quantile (see section ref{tDistributionQuantile}) of the t-distribution with ν degrees of freedom. Define

$$t = \frac{\overline{x}_1 - \sigma_2}{s}, \quad s = \sqrt{s_1^2/N}, \quad \nu = N - 1.$$

Then p-values and rejection criteria for H_0 can be calculated as summarized below

Test problem	p-value	Reject H_0
$H_{01} : \sigma_1 \leq \sigma_2$ vs $H_{A1} : \sigma_1 > \sigma_2$	$F_t(-t, \nu)$	$t > t_{\nu;1-\alpha}$
$H_{02} : \sigma_1 \geq \sigma_2$ vs $H_{A2} : \sigma_1 < \sigma_2$	$F_t(t, \nu)$	$t > t_{\nu;\alpha}$
$H_{03} : \sigma_1 = \sigma_2$ vs $H_{A3} : \sigma_1 \neq \sigma_2$	$F_t(t, \nu) - F_t(-t, \nu)$	$t > t_{\nu;1-\alpha/2}$ or $t > t_{\nu;\alpha/2}$

The test can also be expressed in terms of a correlation coefficient r between the combined X and an indicator variable, where t and r are related by

$$r = \frac{t}{\sqrt{t^2 + \nu}}, \quad t = \nu\frac{r}{1 - r^2}.$$

An actual call to the function, requesting Student's t-test with description, the critical value for a two-sided test, the p-value for H_{03} (in the case of TTest this is $\sigma_1 \neq \sigma_2$), for 2 independent samples of size 10 and standard deviation 1 each, with means 2.3 and 4.5, and a type I error $\alpha = 0.05$ would be

```
>>> from xlcalcnet import mpm
>>> math53.StudentT1Test(means:=[5.24, 4.05], sd:=1.5, n:=22)

Input
Variable Variable 1
Common N 22
Mean. Group 1 5.24
Mean. Group 2 4.05
StDev. Group 1 1.5
StDev. Group 2 3.5

F-test for 2 variances
Parameter Result
df1 21
df2 21
Variance-Ratio 0.183673469
F. 1 - alpha(1 - sided) 2.084188623
F . 1 - alpha(2 - sided) 2.408589482
F-test. p-value (H01: s1 >= s2) 0.999864065
F-test. p-value (H02: s1 <= s2) 0.000135935
F-test. p-value (H03: s1 = s2) 1.999728131
```

34.2.8 F-test for the variances of 2 independent samples: confidence intervals

`ctx.fratio_variance_2isamples_ci`(*s2*, *n*, *alpha=0.05*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Returns results of the confidence intervals for the F-test for the variances of 2 independent samples.

Parameters:

Mean
The mean of the sample.

Sd
The standard deviation of the sample

N
The sample size

Alpha
The alpha-level used for confidence intervals

Let $A_1 = t_{\nu,\alpha} \cdot s$ and $A_2 = t_{\nu,\alpha/2} \cdot s$, where s and ν are defined in (ref{eq:TTest1}), and $t_{\nu,\alpha}$ denotes the α-quantile of the (central) t-distribution with ν degrees of freedom (see section ref{tDistributionQuantile}).

Type	Confidence Interval (Difference of Means)
Left-sided	$-\infty \leq \sigma_1 - \sigma_2 \leq (\overline{x}_1 - \sigma_2) + A_1$
Right-sided	$(\overline{x}_1 - \sigma_2) - A_1 \leq \sigma_1 - \sigma_2 \leq +\infty$
Two-sided	$(\overline{x}_1 - \sigma_2) - A_2 \leq \sigma_1 - \sigma_2 \leq (\overline{x}_1 - \sigma_2) + A_2$

An actual call to the function, requesting Student's t-test with description, the critical value for a two-sided test, the p-value for H_{03} (in the case of textsf{TTest} this is $\sigma_1 \neq \sigma_2$), for 2 independent samples of size 10 and standard deviation 1 each, with means 2.3 and 4.5, and a type I error $\alpha = 0.05$ would be

```
>>> from xlcalcnet import mpm
>>> math53.StudentT1CI(mean:=5.24, mean0:=4.05, sd:=1.5, n:=22, alpha=0.05, resultstring)

Input
Variable Variable 1
Common N 22
Mean. Group 1 5.24
Mean. Group 2 4.05
StDev. Group 1 1.5
StDev. Group 2 3.5
Type 1 Error 0.05

F-test for 2 variances
Parameter Result
df1 21
df2 21
Variance-Ratio 0.183673469
F. 1 - alpha(1 - sided) 2.084188623
F . 1 - alpha(2 - sided) 2.408589482
s1/s2. CI - Length(2 - sided) 0.366136297
```

(continues on next page)

(continued from previous page)

```
s1/s2. CI Upper Limit (2-sided) 0.442393986
s1/s2. CI Lower Limit (2-sided) 0.07625769
```

34.2.9 F-test for the variances of 2 independent samples: power

`ctx.fratio_variance_2isamples_power`(*s2*, *n*, *alpha=0.05*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Returns results of the power calculation for the F-test for the variances of 2 independent samples.

Parameters:

Sd
The standard deviation of the sample

N
The sample size

Alpha
The alpha-level used for confidence intervals

Let $\sigma_1^2 = \sigma^2$ and $\nu = N - 1$. Define

$$\widetilde{\rho} = \frac{\sigma_1 - \sigma_2}{\sigma} \text{ and } \delta = \sqrt{N}\widetilde{\rho}.$$

Let $F_{t'}(\cdot, \nu, \delta)$ denote the CDF of the (singly) noncentral t-distribution with ν degrees of freedom and noncentrality parameter δ and let $t_{\nu,\alpha}$ denote the α-quantile of the central t-distribution with ν degrees of freedom. Then the power for accepting H_A at the confidence level α can be calculated as summarized below:

Test	Null Hypothesis	Alternative	Power
1 sided	$H_{01} : \sigma_1 \leq \sigma_2$	$H_{A1} : \sigma_1 > \sigma_2$	$F_{t'}\left(-t_{\nu;1-\alpha}, \nu, \delta\right)$
1 sided	$H_{02} : \sigma_1 \geq \sigma_2$	$H_{A2} : \sigma_1 < \sigma_2$	$F_{t'}\left(t_{\nu;1-\alpha}, \nu, \delta\right)$
2 sided	$H_{03} : \sigma_1 = \sigma_2$	$H_{A1} : \sigma_1 > \sigma_2$	$F_{t'}\left(-t_{\nu;1-\alpha/2}, \nu, \delta\right)$
2 sided	$H_{03} : \sigma_1 = \sigma_2$	$H_{A1} : \sigma_1 > \sigma_2$	$F_{t'}\left(t_{\nu;1-\alpha/2}, \nu, \delta\right)$
2 sided	$H_{03} : \sigma_1 = \sigma_2$	$H_{A3} : \sigma_1 \neq \sigma_2$	$F_{t'}\left(t_{\nu;1-\alpha/2}, \nu, \delta\right) - F_t\left(-t_{\nu;1-\alpha/2}, \nu\, \delta\right)$

An actual call to the function, requesting Student's t-test with description, the critical calue for a two-sided test, the power for H_{A3} (in the case of textsf{TTest} this is $\sigma_1 \neq \sigma_2$), for 2 independent samples of size 10 and standard deviation 1 each, with means 2.3 and 4.5, and a type I error $\alpha = 0.05$ would be

```
>>> from xlcalcnet import mpm
>>> math53.StudentT1CI(mu1:=5.24, mu0:=4.05, sd:=1.5, n:=22, alpha:=0.05)

Input
Variable Variable 1
Common N 22
Mean. Group 1 5.24
Mean. Group 2 4.05
StDev. Group 1 1.5
StDev. Group 2 3.5
Type 1 Error 0.05

F-test for 2 variances
```

(continues on next page)

(continued from previous page)

```
Parameter Result
df1 21
df2 21
Variance-Ratio 0.183673469
F. 1 - alpha(1 - sided) 2.084188623
F . 1 - alpha(2 - sided) 2.408589482
1-sided test. power (HA1: s1 < s2) 0.999864065
1-sided test. power (HA2: s1 > s2) 0.999864065
2-sided test. power (HA1: s1 < s2) 0.999864065
2-sided test. power (HA2: s1 > s2) 0.999864065
2-sided test. power (HA3: s1 <> s2) 0.999864065
```

34.2.10 F-test for the variances of 2 independent samples: sample size

`ctx.fratio_variance_2isamples_samplesize`(*s2*, *alpha=0.05*, *beta=0.1*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Returns results of sample size calculations for the variances of 2 independent samples.

Parameters:

Sd
The standard deviation of the sample

Alpha
The alpha-level used for confidence intervals

Beta
The beta-level used for power

Let $N_{t'}\left(\alpha,\beta,\widetilde{\rho}\right)$ denote the sample size function of the (singly) noncentral t-distribution (see section ref{NoncentralTDistributionSampleSize}) for a given confidence level α, power β and noncentrality parameter $\widetilde{\rho}$ (as defined in equation ref{eq:TTestPower1}. The required total sample size N can be calculated as summarized below

Test	Null Hypothesis	Alternative	Minimal sample size
1 sided	$H_{01}:\sigma_1 \leq \sigma_2$	$H_{A1}:\sigma_1 > \sigma_2$	$N_{t'}\left(\alpha,\beta,\widetilde{\rho}\right)$
1 sided	$H_{02}:\sigma_1 \geq \sigma_2$	$H_{A2}:\sigma_1 < \sigma_2$	$N_{t'}\left(\alpha,\beta,\widetilde{\rho}\right)$
2 sided	$H_{03}:\sigma_1 = \sigma_2$	$H_{A1}:\sigma_1 > \sigma_2$	$N_{t'}\left(\alpha,\beta,\widetilde{\rho}\right)$
2 sided	$H_{03}:\sigma_1 = \sigma_2$	$H_{A1}:\sigma_1 > \sigma_2$	$N_{t'}\left(\alpha,\beta,\widetilde{\rho}\right)$
2 sided	$H_{03}:\sigma_1 = \sigma_2$	$H_{A3}:\sigma_1 \neq \sigma_2$	$N2_{t'}\left(\alpha,\beta,\widetilde{\rho}\right)$

Note that the returned value of N will in general not be an integer, and rounding up may be required.

An actual call to the function, requesting an upper sample size estimate (and actual power) for $\alpha = 0.95$, $\beta = 0.1$, and standard deviations $\sigma_1 = \sigma_2 = 1$, means $\sigma_1 = 2.3$ and $\sigma_2 = 4.5$, would be

```
>>> from xlcalcnet import mpm
>>> math53.StudentT1CI(mu1:=5.24, mu0:=4.05, sd:=1.5, alpha:=0.05, beta:=0.1)
                                    df: 21
                        difference of means: 1.19
                           t-value (=delta): 3.721063
                        t(1-alpha, 1-sided): 1.720743
                        t(1-alpha, 2-sided): 2.079614
  1-sided test, required N (HA1: mu1 < mu2): 18
1-sided test, actual power (HA1: mu1 < mu2): 0.974564
  1-sided test, required N (HA2: mu1 > mu2): 148
1-sided test, actual power (HA2: mu1 > mu2): 0.964564
  2-sided test, required N (HA1: mu1 < mu2): 22
2-sided test, actual power (HA1: mu1 < mu2): 0.954564
  2-sided test, required N (HA2: mu1 > mu2): 212
2-sided test, actual power (HA2: mu1 > mu2): 0.977456
  2-sided test, required N (HA2: mu1 <>mu2): 24
2-sided test, actual power (HA2: mu1 <>mu2): 0.955544
```

34.3 Basic classical statistical tests for 2 correlated samples (stratified)

34.3.1 Student t-test for 2 correlated samples: tests (p-values)

`ctx.studentt_2csamples_test`(*mean*, *sd*, *n*, *alpha=0.05*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Returns results for Student's t-test for for 2 correlated samples.

See also: https://en.wikipedia.org/wiki/Student%27s_t-test#Paired_samples

Parameters:

Mean
The mean of the sample.

Sd
The standard deviation of the sample

N
The sample size

Alpha
The alpha-level used for confidence intervals

Let $(X_1, X_2, \ldots, X_N)$ denote a random sample of size N from a normal distribution with mean μ and variance σ^2, and let

$$\overline{x}_1 = \frac{1}{N}\sum_{i=1}^{N} X_i \quad \text{and } s^2 = \frac{1}{N-1}\sum_{i=1}^{N}(X_i - \overline{x}_1)$$

be the usual sample estimates of the unkown population mean μ and unkown population variance σ^2. Then Student's t-test can be used to test hypotheses concerning μ with regard to a reference value μ_2.

Let $F_t(\cdot, \nu)$ denote the CDF (see section ref{tDistributionCDF}) and let $t_{\nu,\alpha}$ denote the α-quantile (see section ref{tDistributionQuantile}) of the t-distribution with ν degrees of freedom. Define

$$t = \frac{\overline{x}_1 - \mu_2}{s}, \quad s = \sqrt{s_1^2/N}, \quad \nu = N - 1.$$

Then p-values and rejection criteria for H_0 can be calculated as summarized below

Test problem	p-value	Reject H_0
$H_{01} : \mu_1 \leq \mu_2$ vs $H_{A1} : \mu_1 > \mu_2$	$F_t(-t, \nu)$	$t > t_{\nu;1-\alpha}$
$H_{02} : \mu_1 \geq \mu_2$ vs $H_{A2} : \mu_1 < \mu_2$	$F_t(t, \nu)$	$t > t_{\nu;\alpha}$
$H_{03} : \mu_1 = \mu_2$ vs $H_{A3} : \mu_1 \neq \mu_2$	$F_t(t, \nu) - F_t(-t, \nu)$	$t > t_{\nu;1-\alpha/2}$ or $t > t_{\nu;\alpha/2}$

The test can also be expressed in terms of a correlation coefficient r between the combined X and an indicator variable, where t and r are related by

$$r = \frac{t}{\sqrt{t^2 + \nu}}, \quad t = \nu\frac{r}{1 - r^2}.$$

An actual call to the function, requesting Student's t-test with description, the critical value for a two-sided test, the p-value for H_{03} (in the case of TTest this is $\mu_1 \neq \mu_2$), for 2 independent samples of size 10 and standard deviation 1 each, with means 2.3 and 4.5, and a type I error $\alpha = 0.05$ would be

```
>>> from xlcalcnet import mpm
>>> math53.StudentT1Test(means:=[5.24, 4.05], sd:=1.5, n:=22)

Input
Variable Variable 1
Common N 22
Mean. Group 1 5.24
Mean. Group 2 4.05
StDev. Group 1 1.5
StDev. Group 2 3.5
Pearson's rho 0.7
Pearson's rho0. reference 0.2

Student's t-test for 2 corr. samples
Parameter Result
df 21
Difference of means 1.19
t-value (=delta) 2.087398086
t1 - alpha(1 - sided) 1.720742903
t1 - alpha(2 - sided) 2.079613845
test. p-value (H01: μ1 >= μ2) 0.97538843
test. p-value (H02: μ1 <= μ2) 0.02461157
test. p-value (H03: μ1 = μ2) 0.04922314
```

34.3.2 Student t-test for 2 correlated samples: confidence intervals

`ctx.studentt_2csamples_ci`(*mean*, *sd*, *n*, *alpha=0.05*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Returns results for Student's t-test for for 2 correlated samples.

Parameters:

Mean
The mean of the sample.

Sd
The standard deviation of the sample

N
The sample size

Alpha
The alpha-level used for confidence intervals

Let $A_1 = t_{\nu,\alpha} \cdot s$ and $A_2 = t_{\nu,\alpha/2} \cdot s$, where s and ν are defined in (ref{eq:TTest1}), and $t_{\nu,\alpha}$ denotes the α-quantile of the (central) t-distribution with ν degrees of freedom (see section ref{tDistributionQuantile}).

Type	Confidence Interval (Difference of Means)
Left-sided	$-\infty \leq \mu_1 - \mu_2 \leq (\overline{x}_1 - \mu_2) + A_1$
Right-sided	$(\overline{x}_1 - \mu_2) - A_1 \leq \mu_1 - \mu_2 \leq +\infty$
Two-sided	$(\overline{x}_1 - \mu_2) - A_2 \leq \mu_1 - \mu_2 \leq (\overline{x}_1 - \mu_2) + A_2$

An actual call to the function, requesting Student's t-test with description, the critical value for a two-sided test, the p-value for H_{03} (in the case of textsf{TTest} this is $\mu_1 \neq \mu_2$), for 2 independent samples of size 10 and standard deviation 1 each, with means 2.3 and 4.5, and a type I error $\alpha = 0.05$ would be

```
>>> from xlcalcnet import mpm
>>> math53.StudentT1CI(mean:=5.24, mean0:=4.05, sd:=1.5, n:=22, alpha=0.05, resultstring)

Input
Variable Variable 1
Common N 22
Mean. Group 1 5.24
Mean. Group 2 4.05
StDev. Group 1 1.5
StDev. Group 2 3.5
Type 1 Error 0.05
Pearson's rho 0.7
Pearson's rho0. reference 0.2

Student's t-test for 2 corr. samples
Parameter Result
df 21
Difference of means 1.19
t-value (=delta) 2.087398086
t1 - alpha(1 - sided) 1.720742903
```

(continues on next page)

(continued from previous page)

```
t1 - alpha(2 - sided) 2.079613845
μ1 - μ2. CI - Length (2 - sided) 2.371124599
μ1 - μ2. CI Upper Limit (2-sided) 2.3755623
μ1 - μ2. CI Lower Limit (2-sided) 0.0044377
```

34.3.3 Student t-test for 2 correlated samples: power

`ctx.studentt_2csamples_power`(*mean*, *sd*, *n*, *alpha=0.05*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Returns the results of Student's t-test for 2 correlated samples: power and sample size.

Parameters:

Mean
The mean of the sample.

Sd
The standard deviation of the sample

N
The sample size

Alpha
The alpha-level used for confidence intervals

Let $\sigma_1^2 = \sigma^2$ and $\nu = N - 1$. Define

$$\widetilde{\rho} = \frac{\mu_1 - \mu_2}{\sigma} \text{ and } \delta = \sqrt{N}\widetilde{\rho}.$$

Let $F_{t'}(\cdot, \nu, \delta)$ denote the CDF of the (singly) noncentral t-distribution with ν degrees of freedom and noncentrality parameter δ and let $t_{\nu,\alpha}$ denote the α-quantile of the central t-distribution with ν degrees of freedom. Then the power for accepting H_A at the confidence level α can be calculated as summarized below:

Test	Null Hypothesis	Alternative	Power
1 sided	$H_{01} : \mu_1 \leq \mu_2$	$H_{A1} : \mu_1 > \mu_2$	$F_{t'}\left(-t_{\nu;1-\alpha}, \nu, \delta\right)$
1 sided	$H_{02} : \mu_1 \geq \mu_2$	$H_{A2} : \mu_1 < \mu_2$	$F_{t'}\left(t_{\nu;1-\alpha}, \nu, \delta\right)$
2 sided	$H_{03} : \mu_1 = \mu_2$	$H_{A1} : \mu_1 > \mu_2$	$F_{t'}\left(-t_{\nu;1-\alpha/2}, \nu, \delta\right)$
2 sided	$H_{03} : \mu_1 = \mu_2$	$H_{A1} : \mu_1 > \mu_2$	$F_{t'}\left(t_{\nu;1-\alpha/2}, \nu, \delta\right)$
2 sided	$H_{03} : \mu_1 = \mu_2$	$H_{A3} : \mu_1 \neq \mu_2$	$F_{t'}\left(t_{\nu;1-\alpha/2}, \nu, \delta\right) - F_t\left(-t_{\nu;1-\alpha/2}, \nu\, \delta\right)$

An actual call to the function, requesting Student's t-test with description, the critical calue for a two-sided test, the power for H_{A3} (in the case of textsf{TTest} this is $\mu_1 \neq \mu_2$), for 2 independent samples of size 10 and standard deviation 1 each, with means 2.3 and 4.5, and a type I error $\alpha = 0.05$ would be

```
>>> from xlcalcnet import mpm
>>> math53.StudentT1CI(mu1:=5.24, mu0:=4.05, sd:=1.5, n:=22, alpha:=0.05)

Input
Variable Variable 1
Common N 22
Mean. Group 1 5.24
Mean. Group 2 4.05
StDev. Group 1 1.5
StDev. Group 2 3.5
```

(continues on next page)

(continued from previous page)

```
Type 1 Error 0.05
Pearson's rho 0.7
Pearson's rho0. reference 0.2

Student's t-test for 2 corr. samples
Parameter Result
df 21
Difference of means 1.19
t-value (=delta) 2.087398086
t1 - alpha(1 - sided) 1.720742903
t1 - alpha(2 - sided) 2.079613845
1-sided test. power (HA1: μ1 < μ2) 0.000122287
1-sided test. power (HA2: μ1 > μ2) 0.646013238
2-sided test. power (HA1: μ1 < μ2) 3.78799E-05
2-sided test. power (HA2: μ1 > μ2) 0.512603358
2-sided test. power (HA3: μ1 <> μ2) 0.512641238
test. Pr[Mean 1 < Mean 2] 0.018426082
test. Pr[Mean 1 > Mean 2] 0.981573918
```

34.3.4 Student t-test for 2 correlated samples: sample size calculation

`ctx.studentt_2csamples_samplesize`(*mu*, *sd*, *alpha=0.05*, *beta=0.1*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Returns the results of sample size calculations for Student's t-test for 2 correlated samples

Parameters:

Mean
The mean of the sample.

Sd
The standard deviation of the sample

N
The sample size

Alpha
The alpha-level used for confidence intervals

Beta
The beta-level used for power

Let $N_{t'}(\alpha, \beta, \widetilde{\rho})$ denote the sample size function of the (singly) noncentral t-distribution (see section ref{NoncentralTDistributionSampleSize}) for a given confidence level α, power β and noncentrality parameter $\widetilde{\rho}$ (as defined in equation ref{eq:TTestPower1}. The required total sample size N can be calculated as summarized below

Test	Null Hypothesis	Alternative	Minimal sample size
1 sided	$H_{01} : \mu_1 \leq \mu_2$	$H_{A1} : \mu_1 > \mu_2$	$N_{t'}(\alpha, \beta, \widetilde{\rho})$
1 sided	$H_{02} : \mu_1 \geq \mu_2$	$H_{A2} : \mu_1 < \mu_2$	$N_{t'}(\alpha, \beta, \widetilde{\rho})$
2 sided	$H_{03} : \mu_1 = \mu_2$	$H_{A1} : \mu_1 > \mu_2$	$N_{t'}(\alpha, \beta, \widetilde{\rho})$
2 sided	$H_{03} : \mu_1 = \mu_2$	$H_{A1} : \mu_1 > \mu_2$	$N_{t'}(\alpha, \beta, \widetilde{\rho})$
2 sided	$H_{03} : \mu_1 = \mu_2$	$H_{A3} : \mu_1 \neq \mu_2$	$N2_{t'}(\alpha, \beta, \widetilde{\rho})$

Note that the returned value of N will in general not be an integer, and rounding up may be required.

An actual call to the function, requesting an upper sample size estimate (and actual power) for $\alpha = 0.95$, $\beta = 0.1$, and standard deviations $\sigma_1 = \sigma_2 = 1$, means $\mu_1 = 2.3$ and $\mu_2 = 4.5$, would be

```
>>> from xlcalcnet import mpm
>>> math53.StudentT1CI(mu1:=5.24, mu0:=4.05, sd:=1.5, alpha:=0.05, beta:=0.1)
                                      df: 21
                        difference of means: 1.19
                           t-value (=delta): 3.721063
                        t(1-alpha, 1-sided): 1.720743
                        t(1-alpha, 2-sided): 2.079614
  1-sided test, required N (HA1: mu1 < mu2): 18
1-sided test, actual power (HA1: mu1 < mu2): 0.974564
  1-sided test, required N (HA2: mu1 > mu2): 148
1-sided test, actual power (HA2: mu1 > mu2): 0.964564
```

(continues on next page)

(continued from previous page)

```
  2-sided test, required N (HA1: mu1 < mu2): 22
2-sided test, actual power (HA1: mu1 < mu2): 0.954564
  2-sided test, required N (HA2: mu1 > mu2): 212
2-sided test, actual power (HA2: mu1 > mu2): 0.977456
  2-sided test, required N (HA2: mu1 <>mu2): 24
2-sided test, actual power (HA2: mu1 <>mu2): 0.955544
```

34.3.5 Morgan-Pitman test for the variances of 2 correlated samples: tests (p-values)

`ctx.`**`fratio_variance_2csamples_test`**(*s2*, *n*, *alpha=0.05*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Returns results for the Morgan-Pitman test for the variances of 2 correlated samples.

Parameters:

Sd
The standard deviation of the sample

N
The sample size

Alpha
The alpha-level used for confidence intervals

Let $(X_1, X_2, \ldots, X_N)$ denote a random sample of size N from a normal distribution with mean σ and variance σ^2, and let

$$\overline{x}_1 = \frac{1}{N}\sum_{i=1}^{N} X_i \quad \text{and } s^2 = \frac{1}{N-1}\sum_{i=1}^{N}(X_i - \overline{x}_1)$$

be the usual sample estimates of the unkown population mean σ and unkown population variance σ^2. Then Student's t-test can be used to test hypotheses concerning σ with regard to a reference value σ_2.

Let $F_t(\cdot, \nu)$ denote the CDF (see section ref{tDistributionCDF}) and let $t_{\nu,\alpha}$ denote the α-quantile (see section ref{tDistributionQuantile}) of the t-distribution with ν degrees of freedom. Define

$$t = \frac{\overline{x}_1 - \sigma_2}{s}, \quad s = \sqrt{s_1^2/N}, \quad \nu = N - 1.$$

Then p-values and rejection criteria for H_0 can be calculated as summarized below

Test problem	p-value	Reject H_0
$H_{01} : \sigma_1 \leq \sigma_2$ vs $H_{A1} : \sigma_1 > \sigma_2$	$F_t(-t, \nu)$	$t > t_{\nu;1-\alpha}$
$H_{02} : \sigma_1 \geq \sigma_2$ vs $H_{A2} : \sigma_1 < \sigma_2$	$F_t(t, \nu)$	$t > t_{\nu;\alpha}$
$H_{03} : \sigma_1 = \sigma_2$ vs $H_{A3} : \sigma_1 \neq \sigma_2$	$F_t(t, \nu) - F_t(-t, \nu)$	$t > t_{\nu;1-\alpha/2}$ or $t > t_{\nu;\alpha/2}$

The test can also be expressed in terms of a correlation coefficient r between the combined X and an indicator variable, where t and r are related by

$$r = \frac{t}{\sqrt{t^2 + \nu}}, \quad t = \nu\frac{r}{1 - r^2}.$$

An actual call to the function, requesting Student's t-test with description, the critical value for a two-sided test, the p-value for H_{03} (in the case of TTest this is $\sigma_1 \neq \sigma_2$), for 2 independent samples of size 10 and standard deviation 1 each, with means 2.3 and 4.5, and a type I error $\alpha = 0.05$ would be

```
>>> from xlcalcnet import mpm
>>> math53.StudentT1Test(means:=[5.24, 4.05], sd:=1.5, n:=22)

Input
Variable Variable 1
Common N 22
Mean. Group 1 5.24
Mean. Group 2 4.05
StDev. Group 1 1.5
StDev. Group 2 3.5
Pearson's rho 0.7
Pearson's rho0. reference 0.2

Pitman-Morgan-test for 2 corr. variances
Parameter Result
df1 21
df2 21
Variance-Ratio 0.183673469
F. 1 - alpha(1 - sided) 2.084188623
F . 1 - alpha(2 - sided) 2.408589482
Pitman-Morgan F-test. p-value (H01: s1 >= s2) 0.999864065
Pitman-Morgan F-test. p-value (H02: s1 <= s2) 0.000135935
Pitman-Morgan F-test. p-value (H03: s1 = s2) 0.999728131
```

34.3.6 Morgan-Pitman test for the variances of 2 correlated samples: confidence intervals

`ctx.fratio_variance_2csamples_ci`(*s2*, *n*, *alpha=0.05*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Returns results of the confidence intervals for the Morgan-Pitman test for the variances of 2 correlated samples.

Parameters:

Mean
The mean of the sample.

Sd
The standard deviation of the sample

N
The sample size

Alpha
The alpha-level used for confidence intervals

Let $A_1 = t_{\nu,\alpha} \cdot s$ and $A_2 = t_{\nu,\alpha/2} \cdot s$, where s and ν are defined in (ref{eq:TTest1}), and $t_{\nu,\alpha}$ denotes the α-quantile of the (central) t-distribution with ν degrees of freedom (see section ref{tDistributionQuantile}).

Type	Confidence Interval (Difference of Means)
Left-sided	$-\infty \leq \sigma_1 - \sigma_2 \leq (\overline{x}_1 - \sigma_2) + A_1$
Right-sided	$(\overline{x}_1 - \sigma_2) - A_1 \leq \sigma_1 - \sigma_2 \leq +\infty$
Two-sided	$(\overline{x}_1 - \sigma_2) - A_2 \leq \sigma_1 - \sigma_2 \leq (\overline{x}_1 - \sigma_2) + A_2$

An actual call to the function, requesting Student's t-test with description, the critical value for a two-sided test, the p-value for H_{03} (in the case of textsf{TTest} this is $\sigma_1 \neq \sigma_2$), for 2 independent samples of size 10 and standard deviation 1 each, with means 2.3 and 4.5, and a type I error $\alpha = 0.05$ would be

```
>>> from xlcalcnet import mpm
>>> math53.StudentT1CI(mean:=5.24, mean0:=4.05, sd:=1.5, n:=22, alpha=0.05, resultstring)

Input
Variable Variable 1
Common N 22
Mean. Group 1 5.24
Mean. Group 2 4.05
StDev. Group 1 1.5
StDev. Group 2 3.5
Type 1 Error 0.05
Pearson's rho 0.7
Pearson's rho0. reference 0.2

Pitman-Morgan-test for 2 corr. variances
Parameter Result
df1 21
df2 21
Variance-Ratio 0.183673469
F. 1 - alpha(1 - sided) 2.084188623
```

(continues on next page)

(continued from previous page)

```
F . 1 - alpha(2 - sided) 2.408589482
s1/s2. CI - Length(2 - sided) 0.366136297
s1/s2. CI Upper Limit (2-sided) 0.442393986
s1/s2. CI Lower Limit (2-sided) 0.07625769
```

34.3.7 Morgan-Pitman test for the variances of 2 correlated samples: power

`ctx.`**`fratio_variance_2csamples_power`**(*s2*, *n*, *alpha=0.05*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Returns results of the power calculation for the Morgan-Pitman test for the variances of 2 correlated samples.

Parameters:

Sd
The standard deviation of the sample

N
The sample size

Alpha
The alpha-level used for confidence intervals

Let $\sigma_1^2 = \sigma^2$ and $\nu = N - 1$. Define

$$\widetilde{\rho} = \frac{\sigma_1 - \sigma_2}{\sigma} \text{ and } \delta = \sqrt{N}\widetilde{\rho}.$$

Let $F_{t'}\left(\cdot, \nu, \delta\right)$ denote the CDF of the (singly) noncentral t-distribution with ν degrees of freedom and noncentrality parameter δ and let $t_{\nu,\alpha}$ denote the α-quantile of the central t-distribution with ν degrees of freedom. Then the power for accepting H_A at the confidence level α can be calculated as summarized below:

Test	Null Hypothesis	Alternative	Power
1 sided	$H_{01} : \sigma_1 \leq \sigma_2$	$H_{A1} : \sigma_1 > \sigma_2$	$F_{t'}\left(-t_{\nu;1-\alpha}, \nu, \delta\right)$
1 sided	$H_{02} : \sigma_1 \geq \sigma_2$	$H_{A2} : \sigma_1 < \sigma_2$	$F_{t'}\left(t_{\nu;1-\alpha}, \nu, \delta\right)$
2 sided	$H_{03} : \sigma_1 = \sigma_2$	$H_{A1} : \sigma_1 > \sigma_2$	$F_{t'}\left(-t_{\nu;1-\alpha/2}, \nu, \delta\right)$
2 sided	$H_{03} : \sigma_1 = \sigma_2$	$H_{A1} : \sigma_1 > \sigma_2$	$F_{t'}\left(t_{\nu;1-\alpha/2}, \nu, \delta\right)$
2 sided	$H_{03} : \sigma_1 = \sigma_2$	$H_{A3} : \sigma_1 \neq \sigma_2$	$F_{t'}\left(t_{\nu;1-\alpha/2}, \nu, \delta\right) - F_t\left(-t_{\nu;1-\alpha/2}, \nu\, \delta\right)$

An actual call to the function, requesting Student's t-test with description, the critical calue for a two-sided test, the power for H_{A3} (in the case of textsf{TTest} this is $\sigma_1 \neq \sigma_2$), for 2 independent samples of size 10 and standard deviation 1 each, with means 2.3 and 4.5, and a type I error $\alpha = 0.05$ would be

```
>>> from xlcalcnet import mpm
>>> math53.StudentT1CI(mu1:=5.24, mu0:=4.05, sd:=1.5, n:=22, alpha:=0.05)

Input
Variable Variable 1
Common N 22
Mean. Group 1 5.24
Mean. Group 2 4.05
StDev. Group 1 1.5
StDev. Group 2 3.5
Type 1 Error 0.05
Pearson's rho 0.7
Pearson's rho0. reference 0.2
```

(continues on next page)

(continued from previous page)

```
Pitman-Morgan-test for 2 corr. variances
Parameter Result
df1 21
df2 21
Variance-Ratio 0.183673469
F. 1 - alpha(1 - sided) 2.084188623
F . 1 - alpha(2 - sided) 2.408589482
Pitman-Morgan 1-sided test. power (HA1: s1 < s2) 0.999864065
Pitman-Morgan 1-sided test. power (HA2: s1 > s2) 0.999864065
Pitman-Morgan 2-sided test. power (HA1: s1 < s2) 0.999864065
Pitman-Morgan 2-sided test. power (HA2: s1 > s2) 0.999864065
Pitman-Morgan 2-sided test. power (HA3: s1 <> s2) 0.999864065
```

34.3.8 Morgan-Pitman test for the variances of 2 correlated samples: sample size

`ctx.fratio_variance_2csamples_samplesize`(*s2*, *alpha=0.05*, *beta=0.1*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Returns results of sample size calculations for the Morgan-Pitman test for the variances of 2 correlated samples.

Parameters:

Sd
The standard deviation of the sample

Alpha
The alpha-level used for confidence intervals

Beta
The beta-level used for power

Let $N_{t'}\left(\alpha,\beta,\widetilde{\rho}\right)$ denote the sample size function of the (singly) noncentral t-distribution (see section ref{NoncentralTDistributionSampleSize}) for a given confidence level α, power β and noncentrality parameter $\widetilde{\rho}$ (as defined in equation ref{eq:TTestPower1}. The required total sample size N can be calculated as summarized below

Test	Null Hypothesis	Alternative	Minimal sample size
1 sided	$H_{01}:\sigma_1 \leq \sigma_2$	$H_{A1}:\sigma_1 > \sigma_2$	$N_{t'}\left(\alpha,\beta,\widetilde{\rho}\right)$
1 sided	$H_{02}:\sigma_1 \geq \sigma_2$	$H_{A2}:\sigma_1 < \sigma_2$	$N_{t'}\left(\alpha,\beta,\widetilde{\rho}\right)$
2 sided	$H_{03}:\sigma_1 = \sigma_2$	$H_{A1}:\sigma_1 > \sigma_2$	$N_{t'}\left(\alpha,\beta,\widetilde{\rho}\right)$
2 sided	$H_{03}:\sigma_1 = \sigma_2$	$H_{A1}:\sigma_1 > \sigma_2$	$N_{t'}\left(\alpha,\beta,\widetilde{\rho}\right)$
2 sided	$H_{03}:\sigma_1 = \sigma_2$	$H_{A3}:\sigma_1 \neq \sigma_2$	$N2_{t'}\left(\alpha,\beta,\widetilde{\rho}\right)$

Note that the returned value of N will in general not be an integer, and rounding up may be required.

An actual call to the function, requesting an upper sample size estimate (and actual power) for $\alpha = 0.95$, $\beta = 0.1$, and standard deviations $\sigma_1 = \sigma_2 = 1$, means $\sigma_1 = 2.3$ and $\sigma_2 = 4.5$, would be

```
>>> from xlcalcnet import mpm
>>> math53.StudentT1CI(mu1:=5.24, mu0:=4.05, sd:=1.5, alpha:=0.05, beta:=0.1)
                                    df: 21
                        difference of means: 1.19
                           t-value (=delta): 3.721063
                        t(1-alpha, 1-sided): 1.720743
                        t(1-alpha, 2-sided): 2.079614
  1-sided test, required N (HA1: mu1 < mu2): 18
1-sided test, actual power (HA1: mu1 < mu2): 0.974564
  1-sided test, required N (HA2: mu1 > mu2): 148
1-sided test, actual power (HA2: mu1 > mu2): 0.964564
  2-sided test, required N (HA1: mu1 < mu2): 22
2-sided test, actual power (HA1: mu1 < mu2): 0.954564
  2-sided test, required N (HA2: mu1 > mu2): 212
2-sided test, actual power (HA2: mu1 > mu2): 0.977456
  2-sided test, required N (HA2: mu1 <>mu2): 24
2-sided test, actual power (HA2: mu1 <>mu2): 0.955544
```

34.3.9 Pearson's rho, 2 correlated samples: tests (p-values)

`ctx.pearson_rho_test`(*rho*, *rh0*, *n*, *alpha=0.05*, *rtype=1*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Returns results of tests for Pearson's rho, 2 correlated samples.

Parameters:

Mean
The mean of the sample.

Mean0
The reference mean.

Sd
The standard deviation of the sample

N
The sample size

Alpha
The alpha-level used for confidence intervals

Let $(X_1, X_2, \ldots, X_N)$ denote a random sample of size N from a normal distribution with mean ρ and variance σ^2, and let

$$\overline{x}_1 = \frac{1}{N}\sum_{i=1}^{N} X_i \quad \text{and } s^2 = \frac{1}{N-1}\sum_{i=1}^{N}(X_i - \overline{x}_1)$$

be the usual sample estimates of the unkown population mean ρ and unkown population variance σ^2. Then Student's t-test can be used to test hypotheses concerning ρ with regard to a reference value ρ_0.

Let $F_t(\cdot, \nu)$ denote the CDF (see section ref{tDistributionCDF}) and let $t_{\nu,\alpha}$ denote the α-quantile (see section ref{tDistributionQuantile}) of the t-distribution with ν degrees of freedom. Define

$$t = \frac{\overline{x}_1 - \rho_0}{s}, \quad s = \sqrt{s_1^2/N}, \quad \nu = N - 1.$$

Then p-values and rejection criteria for H_0 can be calculated as summarized below

Test problem	p-value	Reject H_0
$H_{01} : \rho \leq \rho_0$ vs $H_{A1} : \rho > \rho_0$	$F_t(-t, \nu)$	$t > t_{\nu;1-\alpha}$
$H_{02} : \rho \geq \rho_0$ vs $H_{A2} : \rho < \rho_0$	$F_t(t, \nu)$	$t > t_{\nu;\alpha}$
$H_{03} : \rho = \rho_0$ vs $H_{A3} : \rho \neq \rho_0$	$F_t(t, \nu) - F_t(-t, \nu)$	$t > t_{\nu;1-\alpha/2}$ or $t > t_{\nu;\alpha/2}$

The test can also be expressed in terms of a correlation coefficient r between the combined X and an indicator variable, where t and r are related by

$$r = \frac{t}{\sqrt{t^2 + \nu}}, \quad t = \nu\frac{r}{1 - r^2}.$$

An actual call to the function, requesting Student's t-test with description, the critical value for a two-sided test, the p-value for H_{03} (in the case of TTest this is $\rho_1 \neq \rho_2$), for 2 independent samples of size 10 and standard deviation 1 each, with means 2.3 and 4.5, and a type I error $\alpha = 0.05$ would be

```
>>> from xlcalcnet import mpm
>>> math53.StudentT1Test(mean:=5.24, mean0:=4.05, sd:=1.5, n:=22, resultstring:='All')

Input
VariableVariable1
CommonN22
Mean.Group15.24
Mean.Group24.05
StDev.Group11.5
StDev.Group23.5
Pearson'srho0.7
Pearson'srho0.reference0.2

Pearson'srho
ParameterResult
df
rho0.1-alpha(1-sided)
rho0.1-alpha(2-sided)
p-value(H01:rho>=0)
p-value(H02:rho<=0)
p-value(H03:rho=0)
p-value(H01:rho>=rho0)
p-value(H02:rho<=rho0)
p-value(H03:rho=rho0)
p-value(H04:rho^2=rho0^2)
```

34.3.10 Pearson's rho, 2 correlated samples: confidence intervals

`ctx.pearson_rho_ci`(*rho*, *rh0*, *n*, *alpha=0.05*, *rtype=1*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Returns results of confidence intervals for Pearson's rho, 2 correlated samples.

Parameters:

Mean
The mean of the sample.

Mean0
The reference mean.

Sd
The standard deviation of the sample

N
The sample size

Alpha
The alpha-level used for confidence intervals

Let $A_1 = t_{\nu,\alpha} \cdot s$ and $A_2 = t_{\nu,\alpha/2} \cdot s$, where s and ν are defined in (ref{eq:TTest1}), and $t_{\nu,\alpha}$ denotes the α-quantile of the (central) t-distribution with ν degrees of freedom (see section ref{tDistributionQuantile}).

Type	Confidence Interval (Difference of Means)
Left-sided	$-\infty \leq \rho_1 - \rho_0 \leq (\overline{x}_1 - \rho_0) + A_1$
Right-sided	$(\overline{x}_1 - \rho_0) - A_1 \leq \rho_1 - \rho_0 \leq +\infty$
Two-sided	$(\overline{x}_1 - \rho_0) - A_2 \leq \rho_1 - \rho_0 \leq (\overline{x}_1 - \rho_0) + A_2$

An actual call to the function, requesting Student's t-test with description, the critical value for a two-sided test, the p-value for H_{03} (in the case of textsf{TTest} this is $\rho_1 \neq \rho_2$), for 2 independent samples of size 10 and standard deviation 1 each, with means 2.3 and 4.5, and a type I error $\alpha = 0.05$ would be

```
>>> from xlcalcnet import mpm
>>> math53.StudentT1CI(mean:=5.24, mean0:=4.05, sd:=1.5, n:=22, alpha=0.05, resultstring)

Input
Variable Variable 1
Common N 22
Mean. Group 1 5.24
Mean. Group 2 4.05
StDev. Group 1 1.5
StDev. Group 2 3.5
Type 1 Error 0.05
Pearson's rho 0.7
Pearson's rho0. reference 0.2

Pearson's rho
Parameter Result
df
```

(continues on next page)

(continued from previous page)

```
rho0. 1 - alpha(1 - sided)
rho0 . 1 - alpha(2 - sided)
rho. CI Upper Limit (2-sided)
rho. estimate
rho. CI Lower Limit (2-sided)
rho. CI - Length(2 - sided)
```

34.3.11 Pearson's rho, 2 correlated samples:: power

`ctx.pearson_rho_power`(*rho*, *rho0*, *n*, *alpha=0.05*, *rtype=1*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Returns the results of power calculations for Pearson's rho, 2 correlated samples.

Parameters:

Rho
The mean of the sample.

Rho0
The reference mean.

N
The sample size

Alpha
The alpha-level used for confidence intervals

Let $\sigma_1^2 = \sigma^2$ and $\nu = N - 1$. Define

$$\widetilde{\rho} = \frac{\rho_1 - \rho_0}{\sigma} \text{ and } \delta = \sqrt{N}\widetilde{\rho}.$$

Let $F_{t'}(\cdot, \nu, \delta)$ denote the CDF of the (singly) noncentral t-distribution with ν degrees of freedom and noncentrality parameter δ and let $t_{\nu,\alpha}$ denote the α-quantile of the central t-distribution with ν degrees of freedom. Then the power for accepting H_A at the confidence level α can be calculated as summarized below:

Test	Null Hypothesis	Alternative	Power
1 sided	$H_{01} : \rho \leq \rho_0$	$H_{A1} : \rho > \rho_0$	$F_{t'}\left(-t_{\nu;1-\alpha}, \nu, \delta\right)$
1 sided	$H_{02} : \rho \geq \rho_0$	$H_{A2} : \rho < \rho_0$	$F_{t'}\left(t_{\nu;1-\alpha}, \nu, \delta\right)$
2 sided	$H_{03} : \rho = \rho_0$	$H_{A1} : \rho > \rho_0$	$F_{t'}\left(-t_{\nu;1-\alpha/2}, \nu, \delta\right)$
2 sided	$H_{03} : \rho = \rho_0$	$H_{A1} : \rho > \rho_0$	$F_{t'}\left(t_{\nu;1-\alpha/2}, \nu, \delta\right)$
2 sided	$H_{03} : \rho = \rho_0$	$H_{A3} : \rho \neq \rho_0$	$F_{t'}\left(t_{\nu;1-\alpha/2}, \nu, \delta\right) - F_t\left(-t_{\nu;1-\alpha/2}, \nu\,\delta\right)$

An actual call to the function, requesting Student's t-test with description, the critical calue for a two-sided test, the power for H_{A3} (in the case of textsf{TTest} this is $\rho_1 \neq \rho_2$), for 2 independent samples of size 10 and standard deviation 1 each, with means 2.3 and 4.5, and a type I error $\alpha = 0.05$ would be

```
>>> from xlcalcnet import mpm
>>> math53.StudentT1CI(mu1:=5.24, mu0:=4.05, sd:=1.5, n:=22, alpha:=0.05)


Input
Variable Variable 1
Common N 22
Mean. Group 1 5.24
Mean. Group 2 4.05
StDev. Group 1 1.5
```

(continues on next page)

(continued from previous page)

```
StDev. Group 2 3.5
Type 1 Error 0.05
Pearson's rho 0.7
Pearson's rho0. reference 0.2

Pearson's rho
Parameter Result
df
rho0. 1 - alpha(1 - sided)
rho0 . 1 - alpha(2 - sided)
Power (HA1: rho > rho0)
Power (HA2: rho < rho0)
Power (HA3: rho <> rho0)
Power (HA4: rho^2 <> rho0^2)
```

34.3.12 Pearson's rho, 2 correlated samples:: sample size calculation

`ctx.pearson_rho_samplesize`(*rho*, *rho0*, *n*, *alpha=0.05*, *beta=0.1*, *rtype=1*)

where `ctx` is `dec`, `mpm`, or `gmp`.

Returns the results of power calculations for Pearson's rho, 2 correlated samples.

Parameters:

Rho
The mean of the sample.

Rho0
The reference mean.

N
The sample size

Alpha
The alpha-level used for confidence intervals

Beta
The beta-level used for power

Let $N_{t'}\left(\alpha,\beta,\widetilde{\rho}\right)$ denote the sample size function of the (singly) noncentral t-distribution (see section ref{NoncentralTDistributionSampleSize}) for a given confidence level α, power β and noncentrality parameter $\widetilde{\rho}$ (as defined in equation ref{eq:TTestPower1}. The required total sample size N can be calculated as summarized below

Test	Null Hypothesis	Alternative	Minimal sample size
1 sided	$H_{01}:\rho\leq\rho_0$	$H_{A1}:\rho>\rho_0$	$N_{t'}\left(\alpha,\beta,\widetilde{\rho}\right)$
1 sided	$H_{02}:\rho\geq\rho_0$	$H_{A2}:\rho<\rho_0$	$N_{t'}\left(\alpha,\beta,\widetilde{\rho}\right)$
2 sided	$H_{03}:\rho=\rho_0$	$H_{A1}:\rho>\rho_0$	$N_{t'}\left(\alpha,\beta,\widetilde{\rho}\right)$
2 sided	$H_{03}:\rho=\rho_0$	$H_{A1}:\rho>\rho_0$	$N_{t'}\left(\alpha,\beta,\widetilde{\rho}\right)$
2 sided	$H_{03}:\rho=\rho_0$	$H_{A3}:\rho\neq\rho_0$	$N2_{t'}\left(\alpha,\beta,\widetilde{\rho}\right)$

Note that the returned value of N will in general not be an integer, and rounding up may be required.

An actual call to the function, requesting an upper sample size estimate (and actual power) for $\alpha=0.95$, $\beta=0.1$, and standard deviations $\sigma_1=\sigma_2=1$, means $\rho_1=2.3$ and $\rho_2=4.5$, would be

```
>>> from xlcalcnet import mpm
>>> math53.StudentT1CI(mu1:=5.24, mu0:=4.05, sd:=1.5, alpha:=0.05, beta:=0.1)
                                      df: 21
                          difference of means: 1.19
                             t-value (=delta): 3.721063
                          t(1-alpha, 1-sided): 1.720743
                          t(1-alpha, 2-sided): 2.079614
  1-sided test, required N (HA1: mu1 < mu2): 18
1-sided test, actual power (HA1: mu1 < mu2): 0.974564
  1-sided test, required N (HA2: mu1 > mu2): 148
1-sided test, actual power (HA2: mu1 > mu2): 0.964564
```

(continues on next page)

(continued from previous page)

```
  2-sided test, required N (HA1: mu1 < mu2): 22
2-sided test, actual power (HA1: mu1 < mu2): 0.954564
  2-sided test, required N (HA2: mu1 > mu2): 212
2-sided test, actual power (HA2: mu1 > mu2): 0.977456
  2-sided test, required N (HA2: mu1 <>mu2): 24
2-sided test, actual power (HA2: mu1 <>mu2): 0.955544
```

Part VIII

User library: graphics

CHAPTER

THIRTYFIVE

DISTRIBUTION FUNCTIONS

Text explaining this chapter

35.1 Introduction to 2D functions plots

35.1.1 Plots of continuous distribution functions

Some text

35.1.1.1 Probability density function (pdf)

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07_DistPlotContinuous.py, and the XML code in the file D07_DistPlotContinuous.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        ylim = None
        target = 'pdf' # pdf, cdf, 'sf', 'hf', 'chf', 'qtf', 'isf'

        Title = 'Beta distribution'
        a = [5, 10.0, 20.5]
        b = [20.5, 10.0, 5]
        xlim = [0, 0.999]
        if target=='hf': ylim=[0, 100]

        dlist = []
        ltext = []
        for j in range(len(a)):
            dlist.append(dreal.dist_beta(a[j], b[j]))
            ltext.append('a=' + str(a[j]) + ', b=' + str(b[j]))

        DistPlotContinuous(Title = Title, dlist=dlist, xlim = xlim,
            ylim = ylim, target = target, ltext = ltext, marker='o',
            markersize=0)
```

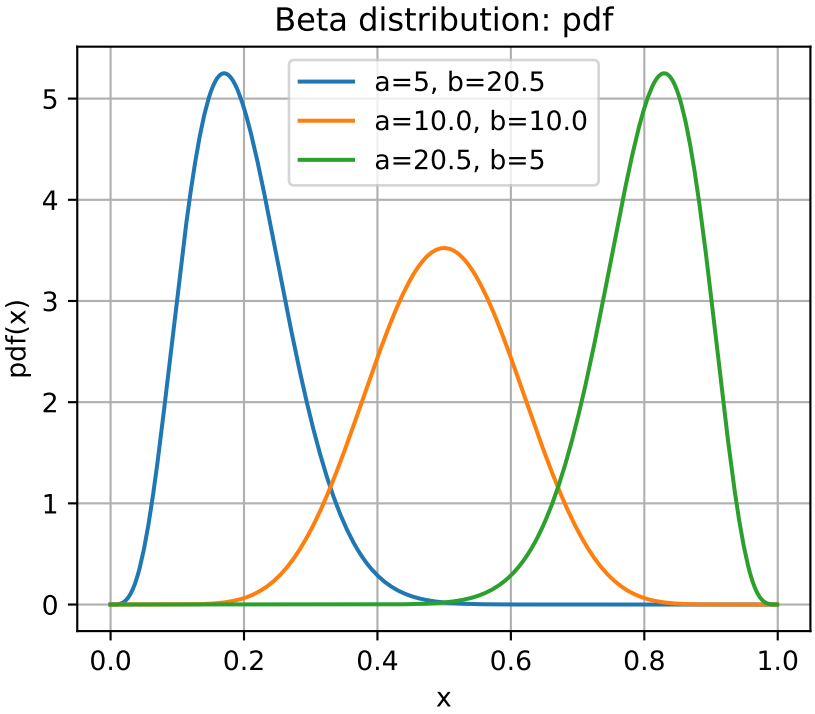
Beta distribution: pdf
a=5, b=20.5
a=10.0, b=10.0
a=20.5, b=5
pdf(x)
x
0
1
2
3
4
5
0.0
0.2
0.4
0.6
0.8
1.0

35.1.1.2 Cumulative distribution function (cdf)

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D07_DistPlotContinuous.py, and the XML code in the file D07_DistPlotContinuous.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        ylim = None
        target = 'cdf' # pdf, cdf, 'sf', 'hf', 'chf', 'qtf', 'isf'

        Title = 'Beta distribution'
        a = [5, 10.0, 20.5]
        b = [20.5, 10.0, 5]
        xlim = [0, 0.999]
        if target=='hf': ylim=[0, 100]

        dlist = []
        ltext = []
        for j in range(len(a)):
            dlist.append(dreal.dist_beta(a[j], b[j]))
            ltext.append('a=' + str(a[j]) + ', b=' + str(b[j]))

        DistPlotContinuous(Title = Title, dlist=dlist, xlim = xlim,
            ylim = ylim, target = target, ltext = ltext, marker='o',
            markersize=0)
```

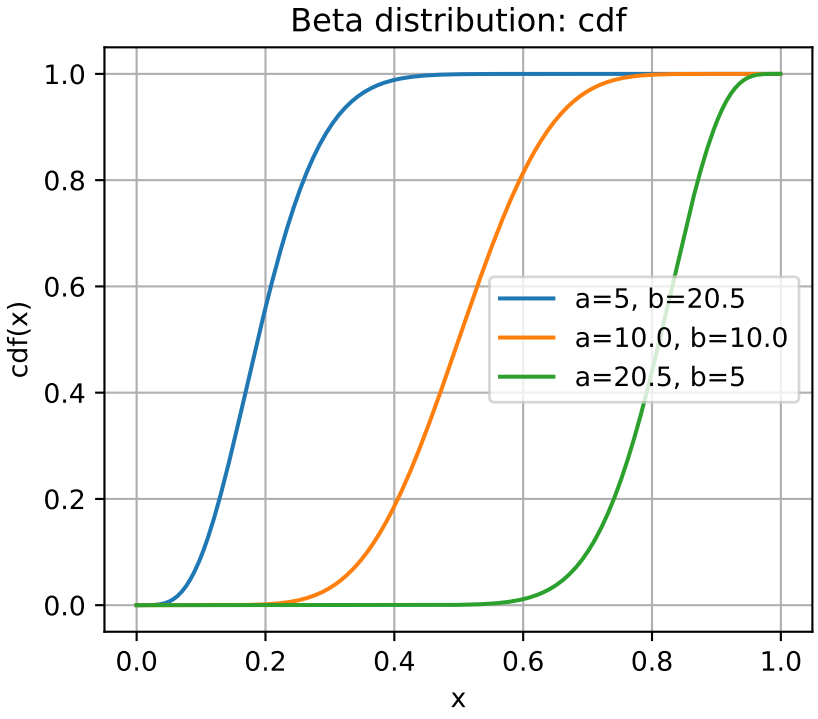

35.1.2 Plots of discrete distribution functions

35.1.2.1 Probability mass function (pmf)

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D08_DistPlotDiscrete.py, and the XML code in the file D08_DistPlotDiscrete.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        ylim = None

        Title = 'Poisson distribution'
        target = 'pmf' # pmf, cdf, 'sf', 'hf', 'chf', 'qtf', 'isf'
        mu = [1, 4, 10]
        xlim = [0.0, 20.0]
        ylim = None
        if target=='qtf': ylim=[0, 20]

        dlist = []
        ltext = []
        for j in range(len(mu)):
            dlist.append(dreal.dist_poisson(mu[j]))
            ltext.append('mu=' + str(mu[j]))
        DistPlotDiscrete(Title = Title, dlist=dlist, xlim = xlim,  ylim = ylim,
            target = target, ltext = ltext, lattice=True, marker='o',
            markersize=3, vertical_lines=True)
```

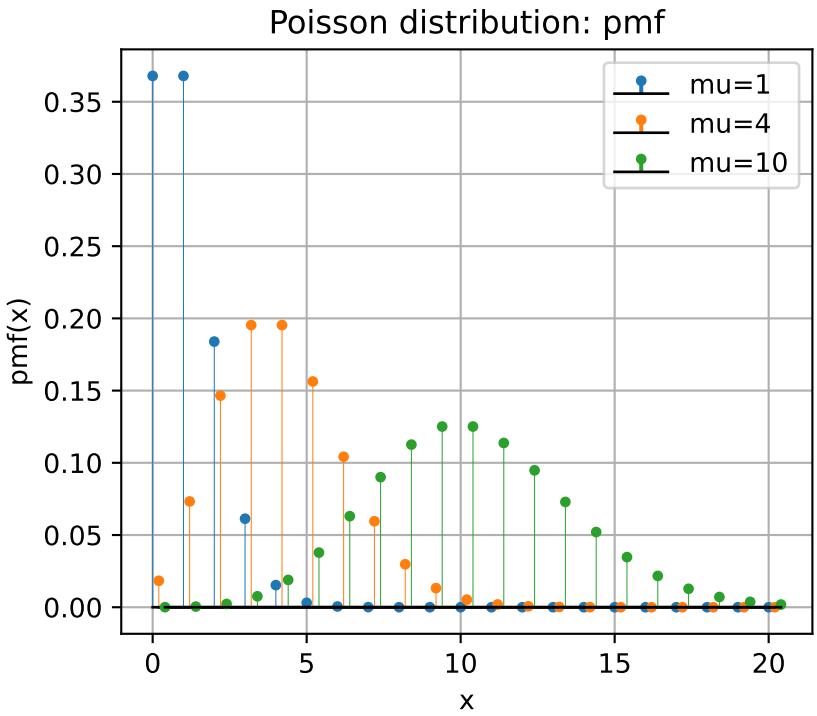

35.1.2.2 Cumulative distribution function (cdf)

The Python code for the example below can be found online in the `DataXlCalcNet` repository or in the corresponding local `DataXlCalcNet` folder in the file D08_DistPlotDiscrete.py, and the XML code in the file D08_DistPlotDiscrete.2D.xml.

To produce the figure as shown below, the try-block at the end of the file should look like this:

```
try:
    if __name__ == '__main__':
        ylim = None

        Title = 'Poisson distribution'
        target = 'cdf' # pmf, cdf, 'sf', 'hf', 'chf', 'qtf', 'isf'
        mu = [1, 4, 10]
        xlim = [0.0, 20.0]
        ylim = None
        if target=='qtf': ylim=[0, 20]

        dlist = []
        ltext = []
        for j in range(len(mu)):
            dlist.append(dreal.dist_poisson(mu[j]))
            ltext.append('mu=' + str(mu[j]))
        DistPlotDiscrete(Title = Title, dlist=dlist, xlim = xlim,  ylim = ylim,
            target = target, ltext = ltext, lattice=True, marker='o',
            markersize=3, vertical_lines=True)
```

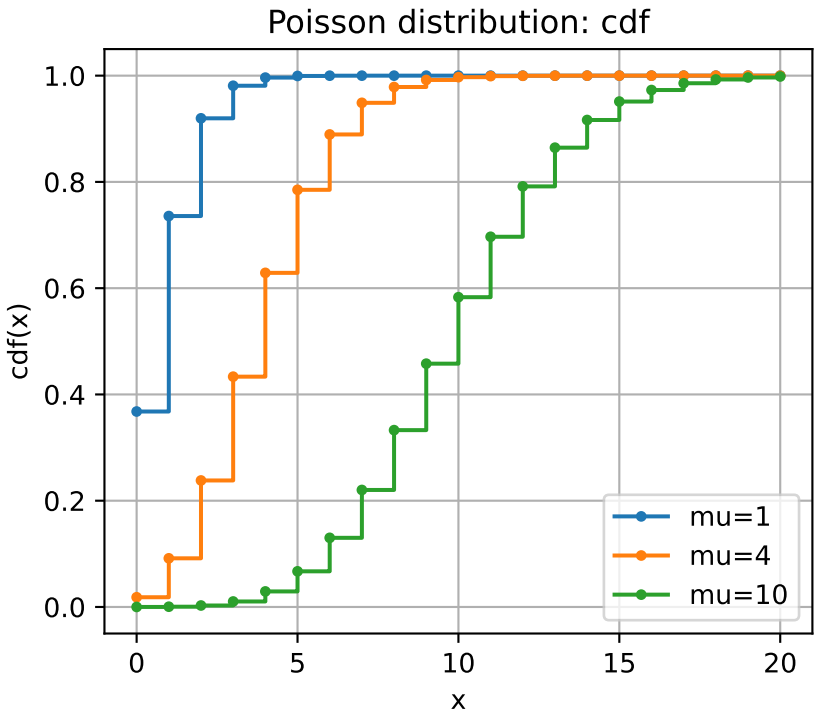

CHAPTER

THIRTYSIX

COMPLEX FUNCTIONS

Text explaining this chapter

36.1 Additional complex functions

36.1.1 Elliptic K

Some Text

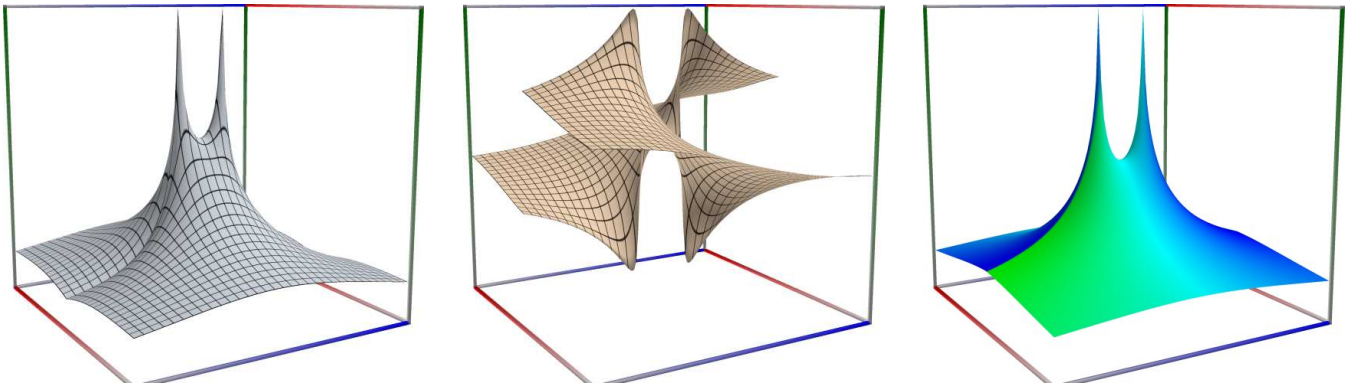

3D wpf plot: real part (left figure), imaginary part (middle figure) and absolute value with color-coded phase (right figure) of the complex sine function $z = \sin(x + iy)$, with $-6 \leq x \leq 6$ (blue axis), $-6 \leq y \leq 6$ (red axis), $-10 \leq z \leq 10$ (green axis). Function values are *loglog-transformed*.

Part IX

Back matter

CHAPTER

THIRTYSEVEN

LICENSE AND HISTORY

37.1 Mozilla Public License Version 2.0

```
1. Definitions
--------------

1.1. "Contributor"
    means each individual or legal entity that creates, contributes to
    the creation of, or owns Covered Software.

1.2. "Contributor Version"
    means the combination of the Contributions of others (if any) used
    by a Contributor and that particular Contributor's Contribution.

1.3. "Contribution"
    means Covered Software of a particular Contributor.

1.4. "Covered Software"
    means Source Code Form to which the initial Contributor has attached
    the notice in Exhibit A, the Executable Form of such Source Code
    Form, and Modifications of such Source Code Form, in each case
    including portions thereof.

1.5. "Incompatible With Secondary Licenses"
    means

    (a) that the initial Contributor has attached the notice described
        in Exhibit B to the Covered Software; or

    (b) that the Covered Software was made available under the terms of
        version 1.1 or earlier of the License, but not also under the
        terms of a Secondary License.

1.6. "Executable Form"
    means any form of the work other than Source Code Form.

1.7. "Larger Work"
    means a work that combines Covered Software with other material, in
    a separate file or files, that is not Covered Software.

1.8. "License"
    means this document.

1.9. "Licensable"
    means having the right to grant, to the maximum extent possible,
    whether at the time of the initial grant or subsequently, any and
    all of the rights conveyed by this License.

1.10. "Modifications"
    means any of the following:
```

(continues on next page)

(continued from previous page)

```
    (a) any file in Source Code Form that results from an addition to,
        deletion from, or modification of the contents of Covered
        Software; or

    (b) any new file in Source Code Form that contains any Covered
        Software.

1.11. "Patent Claims" of a Contributor
    means any patent claim(s), including without limitation, method,
    process, and apparatus claims, in any patent Licensable by such
    Contributor that would be infringed, but for the grant of the
    License, by the making, using, selling, offering for sale, having
    made, import, or transfer of either its Contributions or its
    Contributor Version.

1.12. "Secondary License"
    means either the GNU General Public License, Version 2.0, the GNU
    Lesser General Public License, Version 2.1, the GNU Affero General
    Public License, Version 3.0, or any later versions of those
    licenses.

1.13. "Source Code Form"
    means the form of the work preferred for making modifications.

1.14. "You" (or "Your")
    means an individual or a legal entity exercising rights under this
    License. For legal entities, "You" includes any entity that
    controls, is controlled by, or is under common control with You. For
    purposes of this definition, "control" means (a) the power, direct
    or indirect, to cause the direction or management of such entity,
    whether by contract or otherwise, or (b) ownership of more than
    fifty percent (50%) of the outstanding shares or beneficial
    ownership of such entity.

2. License Grants and Conditions
--------------------------------

2.1. Grants

Each Contributor hereby grants You a world-wide, royalty-free,
non-exclusive license:

(a) under intellectual property rights (other than patent or trademark)
    Licensable by such Contributor to use, reproduce, make available,
    modify, display, perform, distribute, and otherwise exploit its
    Contributions, either on an unmodified basis, with Modifications, or
    as part of a Larger Work; and

(b) under Patent Claims of such Contributor to make, use, sell, offer
    for sale, have made, import, and otherwise transfer either its
    Contributions or its Contributor Version.

2.2. Effective Date

The licenses granted in Section 2.1 with respect to any Contribution
become effective for each Contribution on the date the Contributor first
distributes such Contribution.

2.3. Limitations on Grant Scope

The licenses granted in this Section 2 are the only rights granted under
this License. No additional rights or licenses will be implied from the
distribution or licensing of Covered Software under this License.
Notwithstanding Section 2.1(b) above, no patent license is granted by a
Contributor:
```

(continues on next page)

(continued from previous page)

```
(a) for any code that a Contributor has removed from Covered Software;
    or

(b) for infringements caused by: (i) Your and any other third party's
    modifications of Covered Software, or (ii) the combination of its
    Contributions with other software (except as part of its Contributor
    Version); or

(c) under Patent Claims infringed by Covered Software in the absence of
    its Contributions.

This License does not grant any rights in the trademarks, service marks,
or logos of any Contributor (except as may be necessary to comply with
the notice requirements in Section 3.4).

2.4. Subsequent Licenses

No Contributor makes additional grants as a result of Your choice to
distribute the Covered Software under a subsequent version of this
License (see Section 10.2) or under the terms of a Secondary License (if
permitted under the terms of Section 3.3).

2.5. Representation

Each Contributor represents that the Contributor believes its
Contributions are its original creation(s) or it has sufficient rights
to grant the rights to its Contributions conveyed by this License.

2.6. Fair Use

This License is not intended to limit any rights You have under
applicable copyright doctrines of fair use, fair dealing, or other
equivalents.

2.7. Conditions

Sections 3.1, 3.2, 3.3, and 3.4 are conditions of the licenses granted
in Section 2.1.

3. Responsibilities
-------------------

3.1. Distribution of Source Form

All distribution of Covered Software in Source Code Form, including any
Modifications that You create or to which You contribute, must be under
the terms of this License. You must inform recipients that the Source
Code Form of the Covered Software is governed by the terms of this
License, and how they can obtain a copy of this License. You may not
attempt to alter or restrict the recipients' rights in the Source Code
Form.

3.2. Distribution of Executable Form

If You distribute Covered Software in Executable Form then:

(a) such Covered Software must also be made available in Source Code
    Form, as described in Section 3.1, and You must inform recipients of
    the Executable Form how they can obtain a copy of such Source Code
    Form by reasonable means in a timely manner, at a charge no more
    than the cost of distribution to the recipient; and

(b) You may distribute such Executable Form under the terms of this
    License, or sublicense it under different terms, provided that the
    license for the Executable Form does not attempt to limit or alter
    the recipients' rights in the Source Code Form under this License.
```

(continues on next page)

(continued from previous page)

```
3.3. Distribution of a Larger Work

You may create and distribute a Larger Work under terms of Your choice,
provided that You also comply with the requirements of this License for
the Covered Software. If the Larger Work is a combination of Covered
Software with a work governed by one or more Secondary Licenses, and the
Covered Software is not Incompatible With Secondary Licenses, this
License permits You to additionally distribute such Covered Software
under the terms of such Secondary License(s), so that the recipient of
the Larger Work may, at their option, further distribute the Covered
Software under the terms of either this License or such Secondary
License(s).

3.4. Notices

You may not remove or alter the substance of any license notices
(including copyright notices, patent notices, disclaimers of warranty,
or limitations of liability) contained within the Source Code Form of
the Covered Software, except that You may alter any license notices to
the extent required to remedy known factual inaccuracies.

3.5. Application of Additional Terms

You may choose to offer, and to charge a fee for, warranty, support,
indemnity or liability obligations to one or more recipients of Covered
Software. However, You may do so only on Your own behalf, and not on
behalf of any Contributor. You must make it absolutely clear that any
such warranty, support, indemnity, or liability obligation is offered by
You alone, and You hereby agree to indemnify every Contributor for any
liability incurred by such Contributor as a result of warranty, support,
indemnity or liability terms You offer. You may include additional
disclaimers of warranty and limitations of liability specific to any
jurisdiction.

4. Inability to Comply Due to Statute or Regulation
---------------------------------------------------

If it is impossible for You to comply with any of the terms of this
License with respect to some or all of the Covered Software due to
statute, judicial order, or regulation then You must: (a) comply with
the terms of this License to the maximum extent possible; and (b)
describe the limitations and the code they affect. Such description must
be placed in a text file included with all distributions of the Covered
Software under this License. Except to the extent prohibited by statute
or regulation, such description must be sufficiently detailed for a
recipient of ordinary skill to be able to understand it.

5. Termination
--------------

5.1. The rights granted under this License will terminate automatically
if You fail to comply with any of its terms. However, if You become
compliant, then the rights granted under this License from a particular
Contributor are reinstated (a) provisionally, unless and until such
Contributor explicitly and finally terminates Your grants, and (b) on an
ongoing basis, if such Contributor fails to notify You of the
non-compliance by some reasonable means prior to 60 days after You have
come back into compliance. Moreover, Your grants from a particular
Contributor are reinstated on an ongoing basis if such Contributor
notifies You of the non-compliance by some reasonable means, this is the
first time You have received notice of non-compliance with this License
from such Contributor, and You become compliant prior to 30 days after
Your receipt of the notice.

5.2. If You initiate litigation against any entity by asserting a patent
```

(continues on next page)

(continued from previous page)

```
infringement claim (excluding declaratory judgment actions,
counter-claims, and cross-claims) alleging that a Contributor Version
directly or indirectly infringes any patent, then the rights granted to
You by any and all Contributors for the Covered Software under Section
2.1 of this License shall terminate.

5.3. In the event of termination under Sections 5.1 or 5.2 above, all
end user license agreements (excluding distributors and resellers) which
have been validly granted by You or Your distributors under this License
prior to termination shall survive termination.

************************************************************************
*                                                                      *
*  6. Disclaimer of Warranty                                           *
*  -------------------------                                           *
*                                                                      *
*  Covered Software is provided under this License on an "as is"       *
*  basis, without warranty of any kind, either expressed, implied, or  *
*  statutory, including, without limitation, warranties that the       *
*  Covered Software is free of defects, merchantable, fit for a        *
*  particular purpose or non-infringing. The entire risk as to the     *
*  quality and performance of the Covered Software is with You.        *
*  Should any Covered Software prove defective in any respect, You     *
*  (not any Contributor) assume the cost of any necessary servicing,   *
*  repair, or correction. This disclaimer of warranty constitutes an   *
*  essential part of this License. No use of any Covered Software is   *
*  authorized under this License except under this disclaimer.         *
*                                                                      *
************************************************************************

************************************************************************
*                                                                      *
*  7. Limitation of Liability                                          *
*  --------------------------                                          *
*                                                                      *
*  Under no circumstances and under no legal theory, whether tort      *
*  (including negligence), contract, or otherwise, shall any           *
*  Contributor, or anyone who distributes Covered Software as          *
*  permitted above, be liable to You for any direct, indirect,         *
*  special, incidental, or consequential damages of any character      *
*  including, without limitation, damages for lost profits, loss of    *
*  goodwill, work stoppage, computer failure or malfunction, or any    *
*  and all other commercial damages or losses, even if such party      *
*  shall have been informed of the possibility of such damages. This   *
*  limitation of liability shall not apply to liability for death or   *
*  personal injury resulting from such party's negligence to the       *
*  extent applicable law prohibits such limitation. Some               *
*  jurisdictions do not allow the exclusion or limitation of           *
*  incidental or consequential damages, so this exclusion and          *
*  limitation may not apply to You.                                    *
*                                                                      *
************************************************************************

8. Litigation
-------------

Any litigation relating to this License may be brought only in the
courts of a jurisdiction where the defendant maintains its principal
place of business and such litigation shall be governed by laws of that
jurisdiction, without reference to its conflict-of-law provisions.
Nothing in this Section shall prevent a party's ability to bring
cross-claims or counter-claims.

9. Miscellaneous
----------------
```

(continues on next page)

(continued from previous page)

```
This License represents the complete agreement concerning the subject
matter hereof. If any provision of this License is held to be
unenforceable, such provision shall be reformed only to the extent
necessary to make it enforceable. Any law or regulation which provides
that the language of a contract shall be construed against the drafter
shall not be used to construe this License against a Contributor.

10. Versions of the License
---------------------------

10.1. New Versions

Mozilla Foundation is the license steward. Except as provided in Section
10.3, no one other than the license steward has the right to modify or
publish new versions of this License. Each version will be given a
distinguishing version number.

10.2. Effect of New Versions

You may distribute the Covered Software under the terms of the version
of the License under which You originally received the Covered Software,
or under the terms of any subsequent version published by the license
steward.

10.3. Modified Versions

If you create software not governed by this License, and you want to
create a new license for such software, you may create and use a
modified version of this License if you rename the license and remove
any references to the name of the license steward (except to note that
such modified license differs from this License).

10.4. Distributing Source Code Form that is Incompatible With Secondary
Licenses

If You choose to distribute Source Code Form that is Incompatible With
Secondary Licenses under the terms of this version of the License, the
notice described in Exhibit B of this License must be attached.

Exhibit A - Source Code Form License Notice
-------------------------------------------

  This Source Code Form is subject to the terms of the Mozilla Public
  License, v. 2.0. If a copy of the MPL was not distributed with this
  file, You can obtain one at https://mozilla.org/MPL/2.0/.

If it is not possible or desirable to put the notice in a particular
file, then You may include the notice in a location (such as a LICENSE
file in a relevant directory) where a recipient would be likely to look
for such a notice.

You may add additional accurate notices of copyright ownership.

Exhibit B - "Incompatible With Secondary Licenses" Notice
---------------------------------------------------------

  This Source Code Form is "Incompatible With Secondary Licenses", as
  defined by the Mozilla Public License, v. 2.0.
```

37.2 History

Description of version 0.1

Description of version 0.2

Description of version 0.3

BIBLIOGRAPHY

[1] J. Abate and P. Valko. Multi-precision laplace transform inversion. *International Journal for Numerical Methods in Engineering*, 60:979–993, 2004.

[2] M. Abramowitz and I.A. Stegun. *Confluent Hypergeometric Functions*. in Handbook of Mathematical Functions, New York: Dekker, 1970. Available as https://personal.math.ubc.ca/ÂăcbmÂăands/page_503.htm.

[3] M. Abramowitz and I.A. Stegun. *F-(Variance-Ratio) Distribution Function*. in Handbook of Mathematical Functions, New York: Dekker, 1970. Available as https://personal.math.ubc.ca/ÂăcbmÂăands/page_946.htm.

[4] M. Abramowitz and I.A. Stegun. *Handbook of Mathematical Functions*. New York: Dekker, 1970. Available as https://archive.org/details/AandS-mono600/mode/2up.

[5] Karsten Ahnert and Mario Mulansky. Boost odeint library. https://www.boost.org/doc/libs/latest/libs/numeric/odeint/doc/html/index.html June 2013. Documentation available as https://www.boost.org/doc/libs/latest/libs/numeric/odeint/doc/html/index.html.

[6] M. Akahira, M. Sato, and N. Torigoe. On the new approximation to non-central t-distributions. *J. Japan Statist. Soc*, 25(1):1–18, 1995. Available at http://www.tulips.tsukuba.ac.jp/dspace/bitstream/2241/118436/1/JJSS_25-1.pdf.

[7] A. Al-Babtain, A. M. Eid, and F. Merovci. The five parameter lindley distribution. *Pakistan Journal of Statistics*, 31(4):363–384, 2014.

[8] G. E. Alefeld, F. A. Potra, and Y. Shi. Algorithm 748: enclosing zeros of continuous functions. *ACM Transactions on Mathematical Software*, 21(3):327–344, 1995.

[9] T. W. Anderson. *An Introduction to Multivariate Statistical Analysis*. John Wiley & Sons, Inc., 3 edition, 2003.

[10] S. András and Á. Baricz. Properties of the probability density function of the non-central chi-squared distribution. *Journal of Mathematical Analysis and Applications*, 346(2):395 – 402, 2008. Available at http://www.sciencedirect.com/science/article/pii/S0022247X08005696. doi:http://dx.doi.org/10.1016/j.jmaa.2008.05.074.

[11] T. M. Apostol. On the lerch zeta function. *Pacific Journal of Mathematics*, 1(2):161–167, 1951. Available as https://pdfs.semanticscholar.org/3e70/b0ac7757934c92ea529e3c5fecb967281bab.pdf.

[12] T. M. Apostol. *Lerch's Transcendent*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/25.14.

[13] T. M. Apostol. *Riemann-Siegel Formula*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/25.10#ii.

[14] T. M. Apostol. *Zeta function Zeros*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/25.10.

[15] T.M. Apostol. *Bose-Einstein distribution*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/25.12#iii.

[16] T.M. Apostol. *Dilogarithms*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/25.12#i.

[17] T.M. Apostol. *Hurwitz Zeta Function*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/25.11.

[18] T.M. Apostol. *Polylogarithms*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/25.12#ii.

[19] T.M. Apostol. *Riemann Zeta Function*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/25.2.

[20] R. Askey, R.A.; Roy. *Barnes' G-Function (Double Gamma Function)*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/5.17.

[21] R. Askey, R.A.; Roy. *Beta Function*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/5.2.

[22] R. Askey, R.A.; Roy. *Gamma and Psi Functions*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/5.2.

[23] R. Askey, R.A.; Roy. *Polygamma Functions*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/5.15.

[24] R. A. Askey and A.B.O. Daalhuis. *Generalized Hypergeometric Functions*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/16.2.

[25] N. Balakrishnan and D. Kundi. Birnbaum-saunders distribution: a review of models, analysis, and applications. *Applied Stochastic Models in Business in Industry*, 35(1):4–49, 2018. Available as https://onlinelibrary.wiley.com/doi/full/10.1002/asmb.2348.

[26] R. E. Bechhofer and C. W. Dunnett. *Tables of percentage points of multivariate student T distributions*. Selected Tables in Mathematical Statistics, 11, 1–371, 1988.

[27] Becker. Pearson distribution system, version 1.2.2. r package "pearsonds". 2022. Documentation available as https://cran.r-project.org/web/packages/PearsonDS/PearsonDS.pdf.

[28] R. Bellman, R.E. Kalaba, and J.A. Lockett. *Numerical inversion of the Laplace transform: Applications to Biology, Economics, Engineering, and Physics*. Elsevier, 1966.

[29] B.M. Bennett. On the non-null distribution of WILCOXON's signed rank test. *Metrika*, 19:36–38, 1972.

[30] Denise Benton and K. Krishnamoorthy. Computing discrete mixtures of continuous distributions: noncentral chisquare, noncentral t and the distribution of the square of the sample multiple correlation coefficient. *Computational Statistics & Data Analysis*, 14:249–267, 2003. Available as http://www.ucs.louisiana.edu/Âăkxk4695/CSDA-03.pdf.

[31] A. Berkopec. Hyperquick algorithm for discrete hypergeometric distribution. *Journal of Discrete Algorithms*, 5:341–347, 2007.

[32] S. Blinnikov and R. Moessner. Expansions for nearly gaussian distributions. *Astronomy and Astrophysics Supplement*, 130:193–205, 1998. Available as http://arxiv.org/abs/astro-ph/9711239.

[33] P. Bourke. *Chrysanthemum curve*. Geometry, Surfaces, Curves, Polyhedra, 2001. [Online; last edited on January 2001; accessed 22-Dec-2024]. URL: http://paulbourke.net/geometry/chrysanthemum/.

[34] P. Bourke. *Tanh Spiral*. Geometry, Surfaces, Curves, Polyhedra, 2001. [Online; last edited on January 2001; accessed 22-Dec-2024]. URL: https://paulbourke.net/geometry/spiral/.

[35] G.E.P. Box. A general distribution theory for a class of likelihood criteria. *Biometrika*, 36:317–346, 1949.

[36] R. Brent. *Algorithms for Minimization without Derivatives*. Prentice-Hall (Reprinted by Dover, 2002.), 1st edition, 1973.

[37] R.P. Brent. An algorithm with guaranteed convergence for finding a zero of a function. *The Computer Journal*, 1971.

[38] P. A. Bristow and H. Holin. *Bracket and Solve Root.* Boost Math Toolkit Library, 2013. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/roots_noderiv/bracket_solve.html.

[39] P. A. Bristow and H. Holin. *Cumulative Hazard Function.* Boost Math Toolkit Library, 2013. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/1_74_0/libs/math/doc/html/math_toolkit/dist_ref/nmp.html#math_toolkit.dist_ref.nmp.chf.

[40] P. A. Bristow and H. Holin. *Double-exponential quadrature: exp_sinh.* Boost Math Toolkit Library, 2013. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/double_exponential/de_exp_sinh.html.

[41] P. A. Bristow and H. Holin. *Double-exponential quadrature: sinh_sinh.* Boost Math Toolkit Library, 2013. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/double_exponential/de_sinh_sinh.html.

[42] P. A. Bristow and H. Holin. *Double-exponential quadrature: tanh_sinh.* Boost Math Toolkit Library, 2013. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/double_exponential/de_tanh_sinh.html.

[43] P. A. Bristow and H. Holin. *Fourier Integrals.* Boost Math Toolkit Library, 2013. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/fourier_integrals.html.

[44] P. A. Bristow and H. Holin. *Gauss-Kronrod Quadrature.* Boost Math Toolkit Library, 2013. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/gauss_kronrod.html.

[45] P. A. Bristow and H. Holin. *Gauss-Legendre quadrature.* Boost Math Toolkit Library, 2013. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/roots_deriv.html.

[46] P. A. Bristow and H. Holin. *Hazard Function.* Boost Math Toolkit Library, 2013. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/1_74_0/libs/math/doc/html/math_toolkit/dist_ref/nmp.html#math_toolkit.dist_ref.nmp.hazard.

[47] P. A. Bristow and H. Holin. *Locating Function Minima using Brent's algorithm.* Boost Math Toolkit Library, 2013. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/roots_deriv.html.

[48] P. A. Bristow and H. Holin. *Root Finding With Derivatives: Newton-Raphson, Halley and Schröder.* Boost Math Toolkit Library, 2013. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/roots_deriv.html.

[49] P. A. Bristow and H. Holin. *Trapezoidal Quadrature.* Boost Math Toolkit Library, 2013. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/trapezoidal.html.

[50] P. A. Bristow and H. Holin. *Arcsine Distribution.* Boost Math Toolkit Library, 2014. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/dist_ref/dists/arcine_dist.html.

[51] P. A. Bristow and H. Holin. *Beta Distribution.* Boost Math Toolkit Library, 2014. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/dist_ref/dists/beta_dist.html.

[52] P. A. Bristow and H. Holin. *Cauchy-Lorentz Distribution.* Boost Math Toolkit Library, 2014. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/dist_ref/dists/cauchy_dist.html.

[53] P. A. Bristow and H. Holin. *Chi Squared Distribution.* Boost Math Toolkit Library, 2014. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/dist_ref/dists/chi_squared_dist.html.

[54] P. A. Bristow and H. Holin. *Exponential Distribution.* Boost Math Toolkit Library, 2014. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/dist_ref/dists/exp_dist.html.

[55] P. A. Bristow and H. Holin. *Extreme Value Distribution.* Boost Math Toolkit Library, 2014. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/dist_ref/dists/extreme_dist.html.

[56] P. A. Bristow and H. Holin. *F Distribution.* Boost Math Toolkit Library, 2014. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/dist_ref/dists/f_dist.html.

[57] P. A. Bristow and H. Holin. *Gamma (and Erlang) Distribution.* Boost Math Toolkit Library, 2014. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/dist_ref/dists/gamma_dist.html.

[58] P. A. Bristow and H. Holin. *Inverse Gamma Distribution.* Boost Math Toolkit Library, 2014. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/dist_ref/dists/inverse_gamma_dist.html.

[59] P. A. Bristow and H. Holin. *Inverse Gaussian (or Inverse Normal) Distribution.* Boost Math Toolkit Library, 2014. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/dist_ref/dists/inverse_gamma_dist.html.

[60] P. A. Bristow and H. Holin. *Laplace Distribution.* Boost Math Toolkit Library, 2014. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/dist_ref/dists/laplace_dist.html.

[61] P. A. Bristow and H. Holin. *Log Normal Distribution.* Boost Math Toolkit Library, 2014. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/dist_ref/dists/lognormal_dist.html.

[62] P. A. Bristow and H. Holin. *Logistic Distribution.* Boost Math Toolkit Library, 2014. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/dist_ref/dists/logistic_dist.html.

[63] P. A. Bristow and H. Holin. *Noncentral Beta Distribution.* Boost Math Toolkit Library, 2014. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/dist_ref/dists/nc_beta_dist.html.

[64] P. A. Bristow and H. Holin. *Noncentral Chi-Squared Distribution.* Boost Math Toolkit Library, 2014. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/dist_ref/dists/nc_chi_squared_dist.html.

[65] P. A. Bristow and H. Holin. *Noncentral F Distribution.* Boost Math Toolkit Library, 2014. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/dist_ref/dists/nc_f_dist.html.

[66] P. A. Bristow and H. Holin. *Noncentral T Distribution.* Boost Math Toolkit Library, 2014. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/dist_ref/dists/nc_t_dist.html.

[67] P. A. Bristow and H. Holin. *Normal (Gaussian) Distribution.* Boost Math Toolkit Library, 2014. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/dist_ref/dists/normal_dist.html.

[68] P. A. Bristow and H. Holin. *Pareto Distribution.* Boost Math Toolkit Library, 2014. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/dist_ref/dists/pareto.html.

[69] P. A. Bristow and H. Holin. *Students t Distribution.* Boost Math Toolkit Library, 2014. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/dist_ref/dists/students_t_dist.html.

[70] P. A. Bristow and H. Holin. *Bernoulli Distribution.* Boost Math Toolkit Library, 2015. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/dist_ref/dists/bernoulli_dist.html.

[71] P. A. Bristow and H. Holin. *Binomial Distribution.* Boost Math Toolkit Library, 2015. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/dist_ref/dists/binomial_dist.html.

[72] P. A. Bristow and H. Holin. *Derivative of the Incomplete Beta Function.* Boost Math Toolkit Library, 2015. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/sf_gamma/igamma_inv.html.

[73] P. A. Bristow and H. Holin. *Error Function Inverses.* Boost Math Toolkit Library, 2015. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/sf_beta/ibeta_function.html.

[74] P. A. Bristow and H. Holin. *Error Function erf and complement erfc.* Boost Math Toolkit Library, 2015. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/sf_gamma/gamma_derivatives.html.

[75] P. A. Bristow and H. Holin. *Expm1.* Boost Math Toolkit Library, 2015. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/powers/expm1.html.

[76] P. A. Bristow and H. Holin. *Geometric Distribution.* Boost Math Toolkit Library, 2015. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/dist_ref/dists/geometric_dist.html.

[77] P. A. Bristow and H. Holin. *Hyperexponential Distribution.* Boost Math Toolkit Library, 2015. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/1_74_0/libs/math/doc/html/math_toolkit/dist_ref/dists/hyperexponential_dist.html.

[78] P. A. Bristow and H. Holin. *Hypergeometric Distribution.* Boost Math Toolkit Library, 2015. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/dist_ref/dists/hypergeometric_dist.html.

[79] P. A. Bristow and H. Holin. *Incomplete Beta Functions.* Boost Math Toolkit Library, 2015. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/sf_beta/ibeta_function.html.

[80] P. A. Bristow and H. Holin. *Incomplete Gamma Function Inverses.* Boost Math Toolkit Library, 2015. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/sf_gamma/igamma_inv.html.

[81] P. A. Bristow and H. Holin. *Incomplete Gamma Functions.* Boost Math Toolkit Library, 2015. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/sf_gamma/igamma.html.

[82] P. A. Bristow and H. Holin. *Inverse Chi Squared Distribution.* Boost Math Toolkit Library, 2015. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/1_74_0/libs/math/doc/html/math_toolkit/dist_ref/dists/inverse_chi_squared_dist.html.

[83] P. A. Bristow and H. Holin. *Negative Binomial Distribution.* Boost Math Toolkit Library, 2015. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/dist_ref/dists/negative_binomial_dist.html.

[84] P. A. Bristow and H. Holin. *Poisson Distribution.* Boost Math Toolkit Library, 2015. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/dist_ref/dists/poisson_dist.html.

[85] P. A. Bristow and H. Holin. *Rayleigh Distribution.* Boost Math Toolkit Library, 2015. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/dist_ref/dists/rayleigh.html.

[86] P. A. Bristow and H. Holin. *Skew Normal Distribution.* Boost Math Toolkit Library, 2015. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/1_74_0/libs/math/doc/html/math_toolkit/dist_ref/dists/skew_normal_dist.html.

[87] P. A. Bristow and H. Holin. *The Incomplete Beta Function Inverses.* Boost Math Toolkit Library, 2015. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/sf_gamma/igamma.html.

[88] P. A. Bristow and H. Holin. *Triangular Distribution.* Boost Math Toolkit Library, 2015. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/dist_ref/dists/triangular_dist.html.

[89] P. A. Bristow and H. Holin. *Uniform Distribution.* Boost Math Toolkit Library, 2015. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/dist_ref/dists/uniform_dist.html.

[90] P. A. Bristow and H. Holin. *Weibull Distribution.* Boost Math Toolkit Library, 2015. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/dist_ref/dists/weibull_dist.html.

[91] P. A. Bristow and H. Holin. *Auxiliary function Powm1.* Boost Math Toolkit Library, 2016. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/powers/powm1.html.

[92] P. A. Bristow and H. Holin. *Auxiliary function Sqrt1pm1.* Boost Math Toolkit Library, 2016. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/powers/sqrt1pm1.html.

[93] P. A. Bristow and H. Holin. *Bernoulli Numbers.* Boost Math Toolkit Library, 2016. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/number_series/bernoulli_numbers.html.

[94] P. A. Bristow and H. Holin. *Bessel Functions of the First and Second Kinds.* Boost Math Toolkit Library, 2016. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/bessel/bessel_first.html.

[95] P. A. Bristow and H. Holin. *Beta.* Boost Math Toolkit Library, 2016. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/sf_beta/beta_function.html.

[96] P. A. Bristow and H. Holin. *Binomial Coefficients.* Boost Math Toolkit Library, 2016. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/factorials/sf_binomial.html.

[97] P. A. Bristow and H. Holin. *Cbrt.* Boost Math Toolkit Library, 2016. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/powers/log1p.html.

[98] P. A. Bristow and H. Holin. *CosPi.* Boost Math Toolkit Library, 2016. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/powers/cos_pi.html.

[99] P. A. Bristow and H. Holin. *Factorial.* Boost Math Toolkit Library, 2016. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/factorials/sf_factorial.html.

[100] P. A. Bristow and H. Holin. *Falling Factorial.* Boost Math Toolkit Library, 2016. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/factorials/sf_falling_factorial.html.

[101] P. A. Bristow and H. Holin. *Gamma.* Boost Math Toolkit Library, 2016. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/sf_gamma/tgamma.html.

[102] P. A. Bristow and H. Holin. *Gamma.* Boost Math Toolkit Library, 2016. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/sf_gamma/lgamma.html.

[103] P. A. Bristow and H. Holin. *Hypergeometric 1F1.* Boost Math Toolkit Library, 2016. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/hypergeometric/hypergeometric_1f1.html.

[104] P. A. Bristow and H. Holin. *Hypergeometric Function 0F1.* Boost Math Toolkit Library, 2016. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/hypergeometric/hypergeometric_0f1.html.

[105] P. A. Bristow and H. Holin. *Hypergeometric pFq.* Boost Math Toolkit Library, 2016. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/hypergeometric/hypergeometric_pfq.html.

[106] P. A. Bristow and H. Holin. *Lambert W function.* Boost Math Toolkit Library, 2016. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/lambert_w.html.

[107] P. A. Bristow and H. Holin. *Log1p.* Boost Math Toolkit Library, 2016. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/powers/log1p.html.

[108] P. A. Bristow and H. Holin. *Modified Bessel Functions of the First and Second Kinds.* Boost Math Toolkit Library, 2016. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/bessel/mbessel.html.

[109] P. A. Bristow and H. Holin. *Polygamma.* Boost Math Toolkit Library, 2016. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/lambert_w.html.

[110] P. A. Bristow and H. Holin. *Rising Factorial.* Boost Math Toolkit Library, 2016. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/factorials/sf_rising_factorial.html.

[111] P. A. Bristow and H. Holin. *SinPi.* Boost Math Toolkit Library, 2016. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/powers/sin_pi.html.

[112] P. A. Bristow and H. Holin. *Airy Ai Function.* Boost Math Toolkit Library, 2017. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/airy/ai.html.

[113] P. A. Bristow and H. Holin. *Airy Bi Function.* Boost Math Toolkit Library, 2017. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/airy/bi.html.

[114] P. A. Bristow and H. Holin. *Chebyshev Polynomials.* Boost Math Toolkit Library, 2017. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/sf_poly/chebyshev.html.

[115] P. A. Bristow and H. Holin. *Cyclic Hankel Functions.* Boost Math Toolkit Library, 2017. [Online; accessed 22-July-2024]. URL: https://https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/hankel/cyl_hankel.html.

[116] P. A. Bristow and H. Holin. *Derivatives of the Bessel Functions.* Boost Math Toolkit Library, 2017. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/bessel/bessel_derivatives.html.

[117] P. A. Bristow and H. Holin. *Digamma.* Boost Math Toolkit Library, 2017. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/sf_gamma/digamma.html.

[118] P. A. Bristow and H. Holin. *Double Factorial.* Boost Math Toolkit Library, 2017. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/factorials/sf_double_factorial.html.

[119] P. A. Bristow and H. Holin. *Finding Zeros of Bessel Functions of the First and Second Kinds.* Boost Math Toolkit Library, 2017. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/bessel/bessel_root.html.

[120] P. A. Bristow and H. Holin. *Gegenbauer Polynomials.* Boost Math Toolkit Library, 2017. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/sf_poly/gegenbauer.html.

[121] P. A. Bristow and H. Holin. *Hermite Polynomials.* Boost Math Toolkit Library, 2017. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/sf_poly/hermite.html.

[122] P. A. Bristow and H. Holin. *Hypotenuse.* Boost Math Toolkit Library, 2017. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/powers/hypot.html.

[123] P. A. Bristow and H. Holin. *Jacobi Polynomials.* Boost Math Toolkit Library, 2017. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/sf_poly/jacobi.html.

[124] P. A. Bristow and H. Holin. *Laguerre (and Associated) Polynomials.* Boost Math Toolkit Library, 2017. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/sf_poly/laguerre.html.

[125] P. A. Bristow and H. Holin. *Legendre (and Associated) Polynomials.* Boost Math Toolkit Library, 2017. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/sf_poly/legendre.html.

[126] P. A. Bristow and H. Holin. *Ratios of Gamma Functions.* Boost Math Toolkit Library, 2017. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/sf_gamma/gamma_ratios.html.

[127] P. A. Bristow and H. Holin. *SincPi.* Boost Math Toolkit Library, 2017. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/sinc/sinc_pi.html.

[128] P. A. Bristow and H. Holin. *Spherical Bessel Functions of the First and Second Kinds.* Boost Math Toolkit Library, 2017. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/bessel/sph_bessel.html.

[129] P. A. Bristow and H. Holin. *Spherical Hankel Functions.* Boost Math Toolkit Library, 2017. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/hankel/sph_hankel.html.

[130] P. A. Bristow and H. Holin. *Spherical Harmonics.* Boost Math Toolkit Library, 2017. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/sf_poly/sph_harm.html.

[131] P. A. Bristow and H. Holin. *Trigamma.* Boost Math Toolkit Library, 2017. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/sf_gamma/trigamma.html.

[132] P. A. Bristow and H. Holin. *Airy Ai' Function.* Boost Math Toolkit Library, 2018. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/airy/aip.html.

[133] P. A. Bristow and H. Holin. *Airy Bi' Function.* Boost Math Toolkit Library, 2018. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/airy/aip.html.

[134] P. A. Bristow and H. Holin. *Elliptic Integral D - Legendre Form *Boost Math Toolkit Library.* Boost Math Toolkit Library, 2018. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/ellint/ellint_d.html.

[135] P. A. Bristow and H. Holin. *Elliptic Integral Overview.* Boost Math Toolkit Library, 2018. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/ellint/ellint_intro.html.

[136] P. A. Bristow and H. Holin. *Elliptic Integrals - Carlson Form.* Boost Math Toolkit Library, 2018. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/1_85_0/libs/math/doc/html/math_toolkit/ellint/ellint_carlson.html.

[137] P. A. Bristow and H. Holin. *Elliptic Integrals of the First Kind - Legendre Form.* Boost Math Toolkit Library, 2018. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/ellint/ellint_1.html.

[138] P. A. Bristow and H. Holin. *Elliptic Integrals of the Second Kind - Legendre Form.* Boost Math Toolkit Library, 2018. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/ellint/ellint_2.html.

[139] P. A. Bristow and H. Holin. *Elliptic Integrals of the Third Kind - Legendre Form.* Boost Math Toolkit Library, 2018. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/ellint/ellint_3.html.

[140] P. A. Bristow and H. Holin. *Finding Zeros of Airy Functions.* Boost Math Toolkit Library, 2018. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/airy/airy_root.html.

[141] P. A. Bristow and H. Holin. *Heuman Lambda Function.* Boost Math Toolkit Library, 2018. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/ellint/heuman_lambda.html.

[142] P. A. Bristow and H. Holin. *Jacobi Elliptic Function cd.* Boost Math Toolkit Library, 2018. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/jacobi/jacobi_cd.html.

[143] P. A. Bristow and H. Holin. *Jacobi Elliptic Function cn.* Boost Math Toolkit Library, 2018. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/jacobi/jacobi_cn.html.

[144] P. A. Bristow and H. Holin. *Jacobi Elliptic Function cs.* Boost Math Toolkit Library, 2018. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/jacobi/jacobi_cs.html.

[145] P. A. Bristow and H. Holin. *Jacobi Elliptic Function dc.* Boost Math Toolkit Library, 2018. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/jacobi/jacobi_dc.html.

[146] P. A. Bristow and H. Holin. *Jacobi Elliptic Function dn.* Boost Math Toolkit Library, 2018. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/jacobi/jacobi_dn.html.

[147] P. A. Bristow and H. Holin. *Jacobi Elliptic Function ds.* Boost Math Toolkit Library, 2018. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/jacobi/jacobi_ds.html.

[148] P. A. Bristow and H. Holin. *Jacobi Elliptic Function nc.* Boost Math Toolkit Library, 2018. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/jacobi/jacobi_nc.html.

[149] P. A. Bristow and H. Holin. *Jacobi Elliptic Function nd.* Boost Math Toolkit Library, 2018. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/jacobi/jacobi_nd.html.

[150] P. A. Bristow and H. Holin. *Jacobi Elliptic Function ns.* Boost Math Toolkit Library, 2018. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/jacobi/jacobi_ns.html.

[151] P. A. Bristow and H. Holin. *Jacobi Elliptic Function sc.* Boost Math Toolkit Library, 2018. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/jacobi/jacobi_sc.html.

[152] P. A. Bristow and H. Holin. *Jacobi Zeta Function.* Boost Math Toolkit Library, 2018. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/ellint/jacobi_zeta.html.

[153] P. A. Bristow and H. Holin. *Overview of the Jacobi Elliptic Functions.* Boost Math Toolkit Library, 2018. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/jacobi/jac_over.html.

[154] P. A. Bristow and H. Holin. *Exponential Integral Ei.* Boost Math Toolkit Library, 2019. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/expint/expint_i.html.

[155] P. A. Bristow and H. Holin. *Exponential Integral En.* Boost Math Toolkit Library, 2019. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/expint/expint_n.html.

[156] P. A. Bristow and H. Holin. *Jacobi Elliptic Function sd.* Boost Math Toolkit Library, 2019. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/jacobi/jacobi_sd.html.

[157] P. A. Bristow and H. Holin. *Jacobi Elliptic Function sn.* Boost Math Toolkit Library, 2019. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/jacobi/jacobi_sn.html.

[158] P. A. Bristow and H. Holin. *Riemann Zeta Function.* Boost Math Toolkit Library, 2019. [Online; accessed 22-July-2024]. URL: https://www.boost.org/doc/libs/latest/libs/math/doc/html/math_toolkit/zetas/zeta.html.

[159] Paul A. Bristow, Hubert Holin, Christopher Kormanyos, Bruno Lalande, John Maddock, Johan Råde, Benjamin Sobotta, Gautam Sewani, Thijs van den Berg, Daryle Walker, and and Xiaogang Zhang. Boost math toolkit library. https://www.boost.org/doc/libs/1_54_0/libs/math/doc/html/index.html, June 2013. Documentation available as https://www.boost.org/doc/libs/latest/libs/math/doc/html/index.html.

[160] S.A. Broda and M. Paolella. Saddlepoint approximations for the doubly noncentral t distribution. *Computational Statistics & Data Analysis*, 51:2907–2918, 2007. Postprint available as http://www.zora.uzh.ch/16956/2/broda_dnct_07V.pdf.

[161] B. Malcolm Brown, Matthias Langer, Marco Marletta, Christiane Tretter, and Markus Wagenhofer. Eigenvalue enclosures and exclosures for non-self-adjoint problems in hydrodynamics. *LMS J. Comput. Math.*, 13:65 – 81, 2010.

[162] R. Bulirsch. An extension of the bartky-transformation to incomplete elliptic integrals of the third kind. *Numer. Math.*, 13(3):266–284, 1969.

[163] R. Bulirsch. Numerical calculation of elliptic integrals and elliptic functions. iii. *Numer. Math.*, 13(4):305–315, 1969.

[164] J. Burkardt. *The Truncated Normal Distribution*. Department of Scientific Computing, Florida State University, 2014. Available as https://people.sc.fsu.edu/Âăjburkardt/presentations/truncated_normal.pdf.

[165] R.W. Butler. *Saddlepoint Approximations with Applications*. Cambridge University Press, 1st edition, 2007.

[166] R.W. Butler and M.S. Paolella. Calculating the density and distribution function for the singly and doubly noncentral f. *Statistics and Computing*, 12:9–16, 2002. Working paper (1999) available at http://129.82.101.115/statresearch/stattechreports/Technical%20Reports/1999/99-6%20Butler%20Paolella.pdf.

[167] R.W. Butler and A.T.A. Wood. Laplace approximations for hypergeometric functions with matrix arguments. *Ann. Statist.*, 30:1155–1177, 2002. Available at (permanent url): http://projecteuclid.org/DPubS?service=UI&version=1.0&verb=Display&handle=euclid.aos/1031689021.

[168] R.W. Butler and A.T.A. Wood. Approximation of power in multivariate analysis. *Statistics and Computing*, 15(4):281–287, October 2005. URL: http://dx.doi.org/10.1007/s11222-005-4071-x, doi:10.1007/s11222-005-4071-x.

[169] Bender C.M. and S.A. Orszag. *Advanced Mathematical Methods for Scientists and Engineers*. Springer New York, 1999.

[170] L. Canal. A normal approximation for the chi-square distribution. *Computational Statistics & Data Analysis*, 48:803—808, 2005. Available at http://www.sciencedirect.com/science/article/pii/S0167947304001069.

[171] B. C. Carlson. *Elliptic Integrals*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/19.2.

[172] B. C. Carlson. *Elliptic Integrals (Symmetric Integrals)*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/19.16.

[173] B. C. Carlson. *Elliptic Integrals, Bulirsch-Integrals*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/19.2#iii.

[174] J. R. Cash and A. H. Karp. A variable order runge-kutta method for initial value problems with rapidly varying right-hand sides. *ACM Transactions on Mathematical Software*, 16:201–222, 1990.

[175] R. Chattamvelli and M. C. Jones. Recurrence relations for noncentral density, distribution functions and inverse moments. *Journal of Statistical Computation and Simulation*, 52(3):289–299, 1995. URL: http://www.tandfonline.com/doi/abs/10.1080/00949659508811679, arXiv:http://www.tandfonline.com/doi/pdf/10.1080/00949659508811679, doi:10.1080/00949659508811679.

[176] C. Chesneau. A new family of distributions based on the hypoexponential distribution with fitting reliability data. *Statistica*, 78(2):127—147, 2018. URL: https://doi.org/10.6092/issn.1973-2201/8260.

[177] M. Chiani. Distribution of the largest eigenvalue for real Wishart and Gaussian random matrices and a simple approximation for the Tracy-Widom distribution. *ArXiv e-prints*, September 2012. Available at http://adsabs.harvard.edu/abs/2012arXiv1209.3394C. arXiv:1209.3394.

[178] M. Chiani. Distribution of the largest root of a matrix for Roy's test in multivariate analysis of variance. *ArXiv e-prints*, January 2014. Available at http://adsabs.harvard.edu/abs/2014arXiv1401.3987C. arXiv:1401.3987.

[179] Youn-Min Chou. New representations for the doubly noncentral `f`-distribution and derived distribution. *Communications in Statistics - Theory and Methods*, 14(3):527–534, 1985. URL: http://www.tandfonline.com/doi/abs/10.1080/03610928508828931, arXiv:http://www.tandfonline.com/doi/pdf/10.1080/03610928508828931, doi:10.1080/03610928508828931.

[180] C.A. Coelho, F.J. Marques, and S.R. Oliveira. Near-exact distributions for likelihood ratio statistics used in the simultaneous test of conditions on mean vectors and patterns of covariance matrices. *Mathematical Problems in Engineering*, 2016:1 – 25, 2016.

[181] A.M. Cohen. *Numerical Methods for Laplace Transform Inversion*. Springer, Berlin, 2007.

[182] H. Cohen, F. Rodriguez Villegas, and D. Zagier. Convergence acceleration of alternating series. *Experiment. Math*, 9(1):3–12, 2000.

[183] J. D. Cohen. Noncentral chi-square: some observations on recurrence. *The American Statistician*, 42:120–122, 1988.

[184] S. Coles. *An Introduction to Statistical Modeling of Extreme Values*. Springer, London, 2007.

[185] R. M. Corless, G. H. Gonnet, D. E. G. Hare, D. J. Jeffrey, and D. E. Knuth. On the lambert w function. In *Advances in Computational Mathematics*, 329–359. 1996.

[186] E. A. Cornish and Ronald A. Fisher. Moments and cumulants in the specification of distributions. *Revue de l'Institut International de Statistique*, 5(4):307–320, 1938.

[187] G. E. Crooks. *Field Guide to Continuous Probability Distributions*. Berkeley Institute for Theoretical Sciences (BITS). ISBN: 978-1-7339381-0-5., 1996. Aavailable at http://www.arpapress.com/Volumes/Vol10Issue2/IJRRAS_10_2_02.pdf.

[188] G. E. Crooks. *The amoroso distribution*. arXiv preprint arXiv:1005.3274., 2010.

[189] A.A.M. Cuyt, V. Petersen, B. Verdonk, H. Waadeland, and W.B. Jones. *Handbook of Continued Fractions for Special Functions*. Springer, 2008.

[190] A.A.M. Cuyt, B. Verdonk, S. Becuve, and P. Kuterna. A remarkable example of catastrophic cancellation unraveled. *Computing*, 66(3):309–320, 2001.

[191] A. B. O. Daalhuis. *Whittaker Functions*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/13.14.

[192] A.O. Daalhuis. *Hypergeometric Function: Gauss series*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/15.2#i.

[193] A.O. Daalhuis. *Kummer functions*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/13.2.

[194] C. Dagum. A new model of personal income distribution: specification and estimation. *Économie Appliquée*, 30:413–437, 1977.

[195] H. E. Daniels. Saddlepoint approximations in statistics. *Annals of Mathematical Statistics*, 25:631–650, 1954.

[196] H. E. Daniels. Tail probability approximations. *International Statistical Review*, 55:37–48, 1987.

[197] H. A. David. The power function of some tests based on range. *Biometrika*, 40:347–353, 1953.

[198] H. A. David, P. A. Lachenbruch, and H. P. Brandis. The power function of range and studentized range tests in normal samples. *Biometrika*, 59(1):161–168, 1972. Article Stable url: http://www.jstor.org/stable/2334627.

[199] S. T. David, M. G. Kendall, and A. Stuart. Some questions of distribution in the theory of rank correlation. *Biometrika*, 38(1/2):131–140, 1951. Article Stable url: http://www.jstor.org/stable/2332322.

[200] B. Davies. *Integral Transforms and their Applications*. Springer, 2008.

[201] B. Davies and B. Martin. Numerical inversion of the laplace transform: a survey and comparison of methods. *Journal of Computational Physics*, 33:1–32, 1979.

[202] A. W. Davis. A system of linear differential equations for the distribution of hotelling's generalized `t_0^2`. *The Annals of Mathematical Statistics*, 39(3):815–832, 06 1968. Available at http://dx.doi.org/10.1214/aoms/1177698313. URL: http://dx.doi.org/10.1214/aoms/1177698313, doi:10.1214/aoms/1177698313.

[203] A.W. Davis. Further applications of a differential equation for Hotelling's generalized `T_0^2`. *Annals of the Institute of Statistical Mathematics*, 22(1):77–87, 1970. Available at http://dx.doi.org/10.1007/BF02506325. URL: http://dx.doi.org/10.1007/BF02506325, doi:10.1007/BF02506325.

[204] A.W. Davis. Percentile approximations for a class of likelihood ratio criteria. *Biometrika*, 58:349–356, 1971.

[205] F. R. S. De Gusmao, E. M. M. Ortega, and G. M. Cordeiro. The generalized inverse weibull distribution. *Statistical Papers*, 52(3):591–619, 2011.

[206] Eigen Core Developers. *Fast Fourier Transform module*. Eigen, a C++ linear algebra library, 2023. [Online; accessed 22-July-2024]. URL: https://libeigen.gitlab.io/eigen/docs-nightly/unsupported/group__FFT__Module.html.

[207] Eigen Core Developers. *Matrix cosine*. Eigen, a C++ linear algebra library, 2023. [Online; accessed 22-July-2024]. URL: https://libeigen.gitlab.io/eigen/docs-nightly/unsupported/group__MatrixFunctions__Module.html#matrixbase_cos.

[208] Eigen Core Developers. *Matrix exponential*. Eigen, a C++ linear algebra library, 2023. [Online; accessed 22-July-2024]. URL: https://libeigen.gitlab.io/eigen/docs-nightly/unsupported/group__MatrixFunctions__Module.html#matrixbase_exp.

[209] Eigen Core Developers. *Matrix functions module*. Eigen, a C++ linear algebra library, 2023. [Online; accessed 22-July-2024]. URL: http://eigen.tuxfamily.org/dox/unsupported/group__MatrixFunctions__Module.html.

[210] Eigen Core Developers. *Matrix hyberbolic cosine*. Eigen, a C++ linear algebra library, 2023. [Online; accessed 22-July-2024]. URL: https://libeigen.gitlab.io/eigen/docs-nightly/unsupported/group__MatrixFunctions__Module.html#matrixbase_cosh.

[211] Eigen Core Developers. *Matrix hyperbolic sine*. Eigen, a C++ linear algebra library, 2023. [Online; accessed 22-July-2024]. URL: https://libeigen.gitlab.io/eigen/docs-nightly/unsupported/group__MatrixFunctions__Module.html#matrixbase_sinh.

[212] Eigen Core Developers. *Matrix logarithm*. Eigen, a C++ linear algebra library, 2023. [Online; accessed 22-July-2024]. URL: https://libeigen.gitlab.io/eigen/docs-nightly/unsupported/group__MatrixFunctions__Module.html#matrixbase_log.

[213] Eigen Core Developers. *Matrix raised to arbitrary real power*. Eigen, a C++ linear algebra library, 2023. [Online; accessed 22-July-2024]. URL: https://libeigen.gitlab.io/eigen/docs-nightly/unsupported/group__MatrixFunctions__Module.html#matrixbase_pow.

[214] Eigen Core Developers. *Matrix sine*. Eigen, a C++ linear algebra library, 2023. [Online; accessed 22-July-2024]. URL: https://libeigen.gitlab.io/eigen/docs-nightly/unsupported/group__MatrixFunctions__Module.html#matrixbase_sin.

[215] Eigen Core Developers. *Matrix square root*. Eigen, a C++ linear algebra library, 2023. [Online; accessed 22-July-2024]. URL: https://libeigen.gitlab.io/eigen/docs-nightly/unsupported/group__MatrixFunctions__Module.html#matrixbase_sqrt.

[216] Eigen Core Developers. *Non-linear optimization*. Eigen, a C++ linear algebra library, 2023. [Online; accessed 22-July-2024]. URL: http://eigen.tuxfamily.org/dox/unsupported/group__NonLinearOptimization__Module.html.

[217] Eigen Core Developers. *Polynomial Solver Base*. Eigen, a C++ linear algebra library, 2023. [Online; accessed 22-July-2024]. URL: https://libeigen.gitlab.io/eigen/docs-nightly/unsupported/classEigen_1_1PolynomialSolverBase.html.

[218] Eigen Core Developers. *Polynomials module*. Eigen, a C++ linear algebra library, 2023. [Online; accessed 22-July-2024]. URL: http://eigen.tuxfamily.org/dox/unsupported/group__Polynomials__Module.html.

[219] Eigen Core Developers. *ColPivHouseholderQR*. Eigen, a C++ linear algebra library, 2024. [Online; accessed 22-July-2024]. URL: https://libeigen.gitlab.io/eigen/docs-nightly/classEigen_1_1ColPivHouseholderQR.html.

[220] Eigen Core Developers. *CompleteOrthogonalDecomposition*. Eigen, a C++ linear algebra library, 2024. [Online; accessed 22-July-2024]. URL: https://libeigen.gitlab.io/eigen/docs-nightly/classEigen_1_1CompleteOrthogonalDecomposition.html.

[221] Eigen Core Developers. *ComplexEigenSolver*. Eigen, a C++ linear algebra library, 2024. [Online; accessed 22-July-2024]. URL: https://libeigen.gitlab.io/eigen/docs-nightly/classEigen_1_1ComplexEigenSolver.html.

[222] Eigen Core Developers. *ComplexSchur*. Eigen, a C++ linear algebra library, 2024. [Online; accessed 22-July-2024]. URL: https://libeigen.gitlab.io/eigen/docs-nightly/classEigen_1_1ComplexSchur.html.

[223] Eigen Core Developers. *FullPivHouseholderQR*. Eigen, a C++ linear algebra library, 2024. [Online; accessed 22-July-2024]. URL: https://libeigen.gitlab.io/eigen/docs-nightly/classEigen_1_1FullPivHouseholderQR.html.

[224] Eigen Core Developers. *FullPivLU*. Eigen, a C++ linear algebra library, 2024. [Online; accessed 22-July-2024]. URL: https://libeigen.gitlab.io/eigen/docs-nightly/classEigen_1_1FullPivLU.html.

[225] Eigen Core Developers. *GeneralizedEigenSolver*. Eigen, a C++ linear algebra library, 2024. [Online; accessed 22-July-2024]. URL: https://libeigen.gitlab.io/eigen/docs-nightly/classEigen_1_1GeneralizedEigenSolver.html.

[226] Eigen Core Developers. *GeneralizedSelfAdjointEigenSolver*. Eigen, a C++ linear algebra library, 2024. [Online; accessed 22-July-2024]. URL: https://libeigen.gitlab.io/eigen/docs-nightly/classEigen_1_1GeneralizedSelfAdjointEigenSolver.html.

[227] Eigen Core Developers. *HessenbergDecomposition*. Eigen, a C++ linear algebra library, 2024. [Online; accessed 22-July-2024]. URL: https://libeigen.gitlab.io/eigen/docs-nightly/classEigen_1_1ComplexEigenSolver.html.

[228] Eigen Core Developers. *HouseholderQR*. Eigen, a C++ linear algebra library, 2024. [Online; accessed 22-July-2024]. URL: https://libeigen.gitlab.io/eigen/docs-nightly/classEigen_1_1HouseholderQR.html.

[229] Eigen Core Developers. *JacobiSVD*. Eigen, a C++ linear algebra library, 2024. [Online; accessed 22-July-2024]. URL: https://libeigen.gitlab.io/eigen/docs-nightly/classEigen_1_1JacobiSVD.html.

[230] Eigen Core Developers. *LDLT*. Eigen, a C++ linear algebra library, 2024. [Online; accessed 22-July-2024]. URL: https://libeigen.gitlab.io/eigen/docs-nightly/classEigen_1_1LDLT.html.

[231] Eigen Core Developers. *LLT*. Eigen, a C++ linear algebra library, 2024. [Online; accessed 22-July-2024]. URL: https://libeigen.gitlab.io/eigen/docs-nightly/classEigen_1_1LLT.html.

[232] Eigen Core Developers. *PartialPivLU*. Eigen, a C++ linear algebra library, 2024. [Online; accessed 22-July-2024]. URL: https://libeigen.gitlab.io/eigen/docs-nightly/classEigen_1_1PartialPivLU.html.

[233] Eigen Core Developers. *PseudoEigenvalueMatrix*. Eigen, a C++ linear algebra library, 2024. [Online; accessed 22-July-2024]. URL: https://libeigen.gitlab.io/eigen/docs-nightly/classEigen_1_1EigenSolver.html#a4979eafe0aeef06b19ada7fa5e19db17.

[234] Eigen Core Developers. *PseudoEigenvectors*. Eigen, a C++ linear algebra library, 2024. [Online; accessed 22-July-2024]. URL: https://libeigen.gitlab.io/eigen/docs-nightly/classEigen_1_1EigenSolver.html#a4979eafe0aeef06b19ada7fa5e19db17.

[235] Eigen Core Developers. *RealQZ*. Eigen, a C++ linear algebra library, 2024. [Online; accessed 22-July-2024]. URL: https://libeigen.gitlab.io/eigen/docs-nightly/classEigen_1_1RealQZ.html.

[236] Eigen Core Developers. *RealSchur*. Eigen, a C++ linear algebra library, 2024. [Online; accessed 22-July-2024]. URL: https://libeigen.gitlab.io/eigen/docs-nightly/classEigen_1_1RealSchur.html.

[237] Eigen Core Developers. *Reductions and Partial Reductions*. Eigen, a C++ linear algebra library, 2024. [Online; accessed 22-July-2024]. URL: https://libeigen.gitlab.io/eigen/docs-nightly/group__TutorialReductionsVisitorsBroadcasting.html.

[238] Eigen Core Developers. *SelfAdjointEigenSolver*. Eigen, a C++ linear algebra library, 2024. [Online; accessed 22-July-2024]. URL: https://libeigen.gitlab.io/eigen/docs-nightly/classEigen_1_1SelfAdjointEigenSolver.html.

[239] Eigen Core Developers. *Tridiagonalization*. Eigen, a C++ linear algebra library, 2024. [Online; accessed 22-July-2024]. URL: https://libeigen.gitlab.io/eigen/docs-nightly/classEigen_1_1Tridiagonalization.html.

[240] Eigen Core Developers. *Using BLAS/LAPACK from Eigen*. Eigen, a C++ linear algebra library, 2024. [Online; accessed 22-July-2024]. URL: https://libeigen.gitlab.io/eigen/docs-nightly/TopicUsingBlasLapack.html.

[241] Dharmawansa P, Rajatheva N. and K. Ahmed. On the distribution of the sum of nakagami-m random variables. *IEEE Transactions on Communications*, 55(7):1407–1416, 2007.

[242] K. Dilcher. *Bernoulli and Euler Polynomials*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/24.2.

[243] Wolfram Language Documentation. *Arcsine Distribution*. Wolfram Research, 2004. [Online; accessed 22-July-2024]. URL: https://reference.wolfram.com/language/ref/ArcSinDistribution.html.

[244] Wolfram Language Documentation. *Inverse Gamma Distribution*. Wolfram Research, 2004. [Online; accessed 22-July-2024]. URL: https://reference.wolfram.com/language/ref/InverseGammaDistribution.html.

[245] Wolfram Language Documentation. *Noncentral Student's t-Distribution*. Wolfram Research, 2004. [Online; accessed 22-July-2024]. URL: https://reference.wolfram.com/language/ref/NoncentralBetaDistribution.html.

[246] Wolfram Language Documentation. *Birnbaum-Saunders Distribution*. Wolfram Research, 2005. [Online; accessed 22-July-2024]. URL: https://reference.wolfram.com/language/ref/BirnbaumSaundersDistribution.html.

[247] Wolfram Language Documentation. *Exponential power distribution*. Wolfram Research, 2005. [Online; accessed 22-July-2024]. URL: https://reference.wolfram.com/language/ref/ExponentialPowerDistribution.html.

[248] Wolfram Language Documentation. *Gompertz-Makeham distribution*. Wolfram Research, 2005. [Online; accessed 22-July-2024]. URL: https://reference.wolfram.com/language/ref/GompertzMakehamDistribution.html.

[249] Wolfram Language Documentation. *Hyperexponential Distribution*. Wolfram Research, 2005. [Online; accessed 22-July-2024]. URL: https://reference.wolfram.com/language/ref/HyperexponentialDistribution.html.

[250] Wolfram Language Documentation. *Hypoexponential distribution*. Wolfram Research, 2005. [Online; accessed 22-July-2024]. URL: https://reference.wolfram.com/language/ref/HypoexponentialDistribution.html.

[251] Wolfram Language Documentation. *Inverse ChiSquare Distribution*. Wolfram Research, 2005. [Online; accessed 22-July-2024]. URL: https://reference.wolfram.com/language/ref/InverseChiSquareDistribution.html.

[252] Wolfram Language Documentation. *Kumaraswamy Distribution*. Wolfram Research, 2005. [Online; accessed 22-July-2024]. URL: https://reference.wolfram.com/language/ref/KumaraswamyDistribution.html.

[253] Wolfram Language Documentation. *Moyal Distribution*. Wolfram Research, 2005. [Online; accessed 22-July-2024]. URL: https://reference.wolfram.com/language/ref/MoyalDistribution.html.

[254] Wolfram Language Documentation. *Nakagami Distribution*. Wolfram Research, 2005. [Online; accessed 22-July-2024]. URL: https://reference.wolfram.com/language/ref/NakagamiDistribution.html.

[255] Wolfram Language Documentation. *Shifted Gompertz distribution*. Wolfram Research, 2005. [Online; accessed 22-July-2024]. URL: https://reference.wolfram.com/language/ref/ShiftedGompertzDistribution.html.

[256] Wolfram Language Documentation. *SkewNormal Distribution*. Wolfram Research, 2005. [Online; accessed 22-July-2024]. URL: https://reference.wolfram.com/language/ref/SkewNormalDistribution.html.

[257] Wolfram Language Documentation. *Inverse of the Regularized Incomplete Beta Function*. Wolfram Research, 2006. [Online; accessed 22-July-2024]. URL: https://reference.wolfram.com/language/ref/InverseBetaRegularized.html.

[258] Wolfram Language Documentation. *Inverse of the Regularized Incomplete Gamma Function*. Wolfram Research, 2006. [Online; accessed 22-July-2024]. URL: https://reference.wolfram.com/language/ref/InverseGammaRegularized.html.

[259] Wolfram Language Documentation. *Regularized (Gauss) Hypergeometric Function*. Wolfram Research, 2009. [Online; accessed 22-July-2024]. URL: https://reference.wolfram.com/language/ref/Hypergeometric2F1Regularized.html.

[260] Wolfram Language Documentation. *Regularized Confluent Hypergeometric Function of the First Kind*. Wolfram Research, 2009. [Online; accessed 22-July-2024]. URL: https://reference.wolfram.com/language/ref/Hypergeometric1F1Regularized.html.

[261] Wolfram Language Documentation. *Regularized Confluent Hypergeometric Limit Function*. Wolfram Research, 2009. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/ConfluentHypergeometricLimitFunction.html.

[262] Wolfram Language Documentation. *Airy Ai Function*. Wolfram Research, 2011. [Online; accessed 22-July-2024]. URL: https://reference.wolfram.com/language/ref/AiryAi.html.

[263] Wolfram Language Documentation. *Airy Ai' Function*. Wolfram Research, 2011. [Online; accessed 22-July-2024]. URL: https://reference.wolfram.com/language/ref/AiryAiPrime.html.

[264] Wolfram Language Documentation. *Airy Bi Function*. Wolfram Research, 2011. [Online; accessed 22-July-2024]. URL: https://reference.wolfram.com/language/ref/AiryBi.html.

[265] Wolfram Language Documentation. *Airy Bi' Function*. Wolfram Research, 2011. [Online; accessed 22-July-2024]. URL: https://reference.wolfram.com/language/ref/AiryBiPrime.html.

[266] Wolfram Language Documentation. *Jacobi Elliptic Function cd*. Wolfram Research, 2012. [Online; accessed 22-July-2024]. URL: https://reference.wolfram.com/language/ref/JacobiCD.html.

[267] Wolfram Language Documentation. *Jacobi Elliptic Function cn*. Wolfram Research, 2012. [Online; accessed 22-July-2024]. URL: https://reference.wolfram.com/language/ref/JacobiCN.html.

[268] Wolfram Language Documentation. *Jacobi Elliptic Function cs*. Wolfram Research, 2012. [Online; accessed 22-July-2024]. URL: https://reference.wolfram.com/language/ref/JacobiCS.html.

[269] Wolfram Language Documentation. *Jacobi Elliptic Function dc*. Wolfram Research, 2012. [Online; accessed 22-July-2024]. URL: https://reference.wolfram.com/language/ref/JacobiDC.html.

[270] Wolfram Language Documentation. *Jacobi Elliptic Function dn*. Wolfram Research, 2012. [Online; accessed 22-July-2024]. URL: https://reference.wolfram.com/language/ref/JacobiDN.html.

[271] Wolfram Language Documentation. *Jacobi Elliptic Function ds*. Wolfram Research, 2012. [Online; accessed 22-July-2024]. URL: https://reference.wolfram.com/language/ref/JacobiDS.html.

[272] Wolfram Language Documentation. *Jacobi Elliptic Function nc*. Wolfram Research, 2012. [Online; accessed 22-July-2024]. URL: https://reference.wolfram.com/language/ref/JacobiNC.html.

[273] Wolfram Language Documentation. *Jacobi Elliptic Function nd*. Wolfram Research, 2012. [Online; accessed 22-July-2024]. URL: https://reference.wolfram.com/language/ref/JacobiND.html.

[274] Wolfram Language Documentation. *Jacobi Elliptic Function ns*. Wolfram Research, 2012. [Online; accessed 22-July-2024]. URL: https://reference.wolfram.com/language/ref/JacobiNS.html.

[275] Wolfram Language Documentation. *Jacobi Elliptic Function sc*. Wolfram Research, 2012. [Online; accessed 22-July-2024]. URL: https://reference.wolfram.com/language/ref/JacobiSC.html.

[276] Wolfram Language Documentation. *Jacobi Elliptic Function sd*. Wolfram Research, 2012. [Online; accessed 22-July-2024]. URL: https://reference.wolfram.com/language/ref/JacobiSD.html.

[277] Wolfram Language Documentation. *Jacobi Elliptic Function sn*. Wolfram Research, 2012. [Online; accessed 22-July-2024]. URL: https://reference.wolfram.com/language/ref/JacobiSN.html.

[278] Wolfram Language Documentation. *Jacobi Theta Functions, First Derivative*. Wolfram Research, 2012. [Online; accessed 22-July-2024]. URL: https://reference.wolfram.com/language/ref/EllipticThetaPrime.html.

[279] Wolfram Language Documentation. *Neville ThetaC*. Wolfram Research, 2012. [Online; accessed 22-July-2024]. URL: https://reference.wolfram.com/language/ref/NevilleThetaC.html.

[280] Wolfram Language Documentation. *Neville ThetaD*. Wolfram Research, 2012. [Online; accessed 22-July-2024]. URL: https://reference.wolfram.com/language/ref/NevilleThetaD.html.

[281] Wolfram Language Documentation. *Neville ThetaN*. Wolfram Research, 2012. [Online; accessed 22-July-2024]. URL: https://reference.wolfram.com/language/ref/NevilleThetaN.html.

[282] Wolfram Language Documentation. *Neville ThetaS*. Wolfram Research, 2012. [Online; accessed 22-July-2024]. URL: https://reference.wolfram.com/language/ref/NevilleThetaS.html.

[283] Wolfram Language Documentation. *Parabolic Cylinder Function D*. Wolfram Research, 2016. [Online; accessed 22-July-2024]. URL: https://reference.wolfram.com/language/ref/ParabolicCylinderD.html.

[284] Wolfram Language Documentation. *Regularized Generalized Hypergeometric Function Function 1F2*. Wolfram Research, 2016. [Online; accessed 22-July-2024]. URL: https://reference.wolfram.com/language/ref/HypergeometricPFQRegularized.html.

[285] J.R. Dormand and P.J. Prince. A family of embedded runge-kutta formulae. *Journal of Computational and Applied Mathematics*, 6(1):19 – 26, 1980. URL: http://www.sciencedirect.com/science/article/pii/0771050X80900133, doi:http://dx.doi.org/10.1016/0771-050X(80)90013-3.

[286] M. Dowell and P. Jarratt. The "pegasus" method for computing the root of an equation. *BIT*, 12:503–508, 1972. doi:https://doi.org/10.1007/BF01932959.

[287] E. Dubinov and A. A. Dubinova. Exact integral-free expressions for the integral debye functions. *Technical Physics Letters*, 34(12):503–508, 2008.

[288] D.G. Duffy. On the numerical inversion of laplace transforms: comparison of three new methods on characteristic problems from applications. *ACM Transactions on Mathematical Software*, 19(3):333–359, 1993.

[289] D.G. Duffy. *Advanced Engineering Mathematics*. CRC Press, 1998.

[290] Charles W. Dunnett. A multiple comparison procedure for comparing several treatments with a control. *Journal of the American Statistical Association*, 50:1096–1121, 1955.

[291] T.M. Dunster. *Legendre and Related Functions*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/14.2.

[292] T.M. Dunster. *Spherical and Spheroidal Harmonics*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/14.30.

[293] C. Dutang, V. Goulet, and N. Langevin. Feller-pareto and related distributions: numerical implementation and actuarial applications. *Journal of Statistical Software*, 12:1–22, 2022.

[294] A. Dzieciol, S. Yngve, and P. O. Fröman. Coulomb wave functions with complex values of the variable and the parameters. *J. Math. Phys.*, 2022. doi:https://doi.org/10.1063/1.533083.

[295] W. Ehrhardt. *The AMath and DAMath Special Functions*. Reference Manual and Implementation notes. Version 2.27, 2018. [Online; accessed 22-July-2024]. URL: https://web.archive.org/web/20181221065629/http://wolfgang-ehrhardt.de/specialfunctions.pdf.

[296] O. Espinosa and V. Moll. A generalized polygamma function. *Integral Transforms and Special Functions*, 2004.

[297] E. Fehlberg. Klassische runge-kutta-formeln vierter und niedrigerer ordnung mit schrittweiten-kontrolle und ihre anwendung auf wärmeleitungsprobleme. *Computing (Arch. Elektron. Rechnen)*, 6:61 – 71, 1980.

[298] S. A. Fellingham and D. J. Stoker. An approximation for the exact distribution of the wilcoxon test for symmetry. *Journal of the American Statistical Association*, 59:899–905, 1964. Article Stable url: http://www.jstor.org/stable/2283109.

[299] C. Ferreira and J. L. López. Asymptotic expansions of the hurwitz–lerch zeta function. *J. Math. Anal. Appl.*, 298:210–224, 2004. Available at https://www.sciencedirect.com/science/article/pii/S0022247X04003920.

[300] R. Ferréol. *Archimedean Spiral*. Encyclopédie des formes mathématiques remarquables, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathcurve.com/courbes2d.gb/archimede/archimede.shtml.

[301] R. Ferréol. *Cardioid*. Encyclopédie des formes mathématiques remarquables, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathcurve.com/courbes2d.gb/cardioid/cardioid.shtml.

[302] R. Ferréol. *Ceva trisectrix and sectrix*. Encyclopédie des formes mathématiques remarquables, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathcurve.com/courbes2d.gb/trisectricedeceva/trisectricedeceva.shtml.

[303] R. Ferréol. *Circle*. Encyclopédie des formes mathématiques remarquables, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathcurve.com/courbes2d.gb/cercle/cercle.shtml.

[304] R. Ferréol. *Cycloid*. Encyclopédie des formes mathématiques remarquables, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathcurve.com/courbes2d.gb/cycloid/cycloid.shtml.

[305] R. Ferréol. *Ellipse*. Encyclopédie des formes mathématiques remarquables, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathcurve.com/courbes2d.gb/ellipse/ellipse.shtml.

[306] R. Ferréol. *Epicycloid*. Encyclopédie des formes mathématiques remarquables, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathcurve.com/courbes2d.gb/epicycloid/epicycloid.shtml.

[307] R. Ferréol. *Epispiral*. Encyclopédie des formes mathématiques remarquables, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathcurve.com/courbes2d.gb/epi/epi.shtml.

[308] R. Ferréol. *Epitrochoid*. Encyclopédie des formes mathématiques remarquables, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathcurve.com/courbes2d.gb/epitrochoid/epitrochoid.shtml.

[309] R. Ferréol. *Fish curve*. Encyclopédie des formes mathématiques remarquables, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathcurve.com/courbes2d.gb/poisson/poisson.shtml.

[310] R. Ferréol. *Freeth's Nephroid*. Encyclopédie des formes mathématiques remarquables, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathcurve.com/courbes2d.gb/freeth/nephroiddefreeth.shtml.

[311] R. Ferréol. *Hyperbolic (or reciprocal) Spiral*. Encyclopédie des formes mathématiques remarquables, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathcurve.com/courbes2d.gb/hyperbolic/hyperbolic.shtml.

[312] R. Ferréol. *Hypocycloid*. Encyclopédie des formes mathématiques remarquables, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathcurve.com/courbes2d.gb/hypocycloid/hypocycloid.shtml.

[313] R. Ferréol. *Hypotrochoid*. Encyclopédie des formes mathématiques remarquables, 2019. [Online; accessed 22-July-2024]. URL: https://mathcurve.com/courbes2d.gb/hypotrochoid/hypotrochoid.shtml.

[314] R. Ferréol. *Lamé curve*. Encyclopédie des formes mathématiques remarquables, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathcurve.com/courbes2d.gb/lame/lame.shtml.

[315] R. Ferréol. *Lemniscate of Bernoulli*. Encyclopédie des formes mathématiques remarquables, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathcurve.com/courbes2d.gb/lemniscate/lemniscate.shtml.

[316] R. Ferréol. *Lemniscate of Gerono, or Eight*. Encyclopédie des formes mathématiques remarquables, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathcurve.com/courbes2d.gb/gerono/gerono.shtml.

[317] R. Ferréol. *Limaçon (or snail) of Pascal*. Encyclopédie des formes mathématiques remarquables, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathcurve.com/courbes2d.gb/limacon/limacon.shtml.

[318] R. Ferréol. *Lissajous curve*. Encyclopédie des formes mathématiques remarquables, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathcurve.com/courbes2d.gb/lissajous/lissajous.shtml.

[319] R. Ferréol. *Lituus*. Encyclopédie des formes mathématiques remarquables, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathcurve.com/courbes2d.gb/lituus/lituus.shtml.

[320] R. Ferréol. *Logarithmic Spiral*. Encyclopédie des formes mathématiques remarquables, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathcurve.com/courbes2d.gb/logarithmic/logarithmic.shtml.

[321] R. Ferréol. *Rose*. Encyclopédie des formes mathématiques remarquables, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathcurve.com/courbes2d.gb/rosace/rosace.shtml.

[322] R. Ferréol. *Sluze Cubic*. Encyclopédie des formes mathématiques remarquables, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathcurve.com/courbes2d.gb/cubicsluze/cubicsluze.shtml.

[323] R. Ferréol. *Strophoid*. Encyclopédie des formes mathématiques remarquables, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathcurve.com/courbes2d.gb/strophoid/strophoid.shtml.

[324] R. Ferréol. *Trochoid*. Encyclopédie des formes mathématiques remarquables, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathcurve.com/courbes2d.gb/trochoid/trochoid.shtml.

[325] R. Ferréol. *Cissoid*. Encyclopédie des formes mathématiques remarquables, 2022. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathcurve.com/courbes2d.gb/cissoid/cissoid.shtml.

[326] R. Ferréol. *Cornu spiral or clothoid*. Encyclopédie des formes mathématiques remarquables, 2022. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathcurve.com/courbes2d.gb/cornu/cornu.shtml.

[327] R. Ferréol. *Cyclic-harmonic curves*. Encyclopédie des formes mathématiques remarquables, 2022. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathcurve.com/courbes2d.gb/conchoidderosace/conchoidderosace.shtml.

[328] R. Ferréol. *Maclaurin trisectrix*. Encyclopédie des formes mathématiques remarquables, 2022. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathcurve.com/courbes2d.gb/maclaurin/maclaurin.shtml.

[329] R. Ferréol. *Nodal curve*. Encyclopédie des formes mathématiques remarquables, 2022. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathcurve.com/courbes2d.gb/noeud/noeud.shtml.

[330] R. Ferréol. *Poinsot spiral*. Encyclopédie des formes mathématiques remarquables, 2022. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathcurve.com/courbes2d.gb/poinsot/poinsot.shtml.

[331] R. Ferréol. *Rational circular cubic*. Encyclopédie des formes mathématiques remarquables, 2022. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathcurve.com/courbes2d.gb/cubiccirculairerationnelle/cubiccirculairerationnelle.shtml.

[332] R. Ferréol. *Right rational circular cubic*. Encyclopédie des formes mathématiques remarquables, 2022. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathcurve.com/courbes2d.gb/cubiccirculairerationnelle/cubiccirculairerationnelledroite.shtml.

[333] R. Ferréol. *SiCi Spiral*. Encyclopédie des formes mathématiques remarquables, 2022. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathcurve.com/courbes2d.gb/sici/sici.shtml.

[334] R. A. Fisher. The general sampling distribution of the multiple correlation coefficient. *Proceedings of the Royal Society of London. Series A*, 121(788):654–673, 1928. Article Stable url: http://www.jstor.org/stable/2283109.

[335] R. A. Fisher and E. A. Cornish. The percentile points of distributions having known cumulants. *Technometrics*, 2:209–225, 1960.

[336] Y. Fujikoshi. Asymptotic expansions of the distributions of test statistics in multivariate analysis. *J. Sci. Hiroshima Univ. Ser. A-I Math*, 34(1):73–144, 1970. Available at http://projecteuclid.org/euclid.hmj/1206138381.

[337] Y. Fujikoshi. Asymptotic formulas for the non-null distributions of three statistics for multivariate linear hypothesis. *Annals of the Institute of Statistical Mathematics*, 25:423–436, 1973.

[338] Y. Fujikoshi. Asymptotic expansions for the non-null distributions of three statistics in gmanova. *Annals of the Institute of Statistical Mathematics*, 26:289–297, 1974.

[339] Cordeiro G. The beta moyal: a useful skew distribution. *International Journal of Research and Reviews in Applied Sciences*, 10:171–192, 2012. Aavailable at http://www.arpapress.com/Volumes/Vol10Issue2/IJRRAS_10_2_02.pdf.

[340] D. Gaspard. Connection formulas between coulomb wave functions. 2018. Available at https://arxiv.org/abs/1804.10976.

[341] Constantine Gatsonis and Allan R. Sampson. Connection formulas between coulomb wave functions. *Psychological Bulletin*, 106(3):516–524, 1989.

[342] L. Gatteschi. Asymptotics and bounds for the zeros of laguerre polynomials: a survey. *Journal of Computational and Applied Mathematics*, 144:7–27, 2002.

[343] S. Geisser. Multivariate analysis of variance for a special covariance case. *Journal of the American Statistical Association*, 58:660–669, 1963.

[344] A. Genz and F. Bretz. *Computation of Multivariate Normal and t Probabilities, Lecture notes in Statistics 195*. Springer-Verlag, New York, 2009.

[345] A. Genz, F. Bretz, T. Miwa, X. Mi, F. Leisch, F. Scheipl, and T. Hothorn. *mvtnorm: Multivariate Normal and t Distributions. R package version 1.0-12*. CRAN R-project, 2020.

[346] Y. Gessner. *Analytische Eigenschaften doppelt nichtzentraler Verteilungen*. Dissertation. Universität Trier., 2014.

[347] P. Ginzberg. Quaternion matrices: statistical properties and applications to signal processing and wavelets. *PhD thesis, Imperial College*, 2013. Available as https://spiral.imperial.ac.uk:8443/bitstream/10044/1/18975/1/Ginzberg-P-2013-PhD-Thesis.pdf.

[348] P. Glasserman and J. Ruiz-Mata. Computing the credit loss distribution in the gaussian copula model: a comparison of methods. *Journal of Credit Risk*, 2(4):33–66, 2006. Extended and edited reprint from http://citeseerx.ist.psu.edu/viewdoc/summary?doi=10.1.1.22.6768.

[349] David Goldberg. What every computer scientist should know about floating point arithmetic. *ACM Computing Surveys*, 23(1):5–48, 1991. Extended and edited reprint from http://citeseerx.ist.psu.edu/viewdoc/summary?doi=10.1.1.22.6768.

[350] P.R. Graves-Morris, D.E. Roberts, and A. Salam. The epsilon algorithm and related topics. *Journal of Computational and Applied Mathematics*, 2000.

[351] A. Gray, E. Abbena, and S. Salamon. *Modern Differential Geometry of Curves and Surfaces with Mathematica, 3rd ed.* CRC Press, Boca Raton, FL, 2006.

[352] F. Grubbs. Procedures for detecting outlying observations in samples. *Technometrics*, 11(1):1–21, 1969.

[353] William C. Guenther. Desk calculation of probabilities for the distribution of the sample correlation coefficient. *The American Statistician*, 31:45–48, 1977.

[354] A.K. Gupta and J. Tang. On a general distribution theory for a class of likelihood criteria. *Austral. J. Statist.*, 30:359–366, 1988.

[355] J. Gurland. A relatively simple form of the distribution of the multiple correlation coefficient. *Journal of the Royal Statistical Society, Series B, Methodological*, 30:276–283, 1968.

[356] J. Gurland and O. Asiribo. On the distribution of the multiple correlation coefficient and the kinked chi-square random variable. *Statistica Sinica*, 1:493–502, 1991. Article Stable url: https://www.jstor.org/stable/24304023?seq=1.

[357] J. Gurland and R. Milton. Further consideration of the distribution of the multiple correlation coefficient. *Journal of the Royal Statistical Society. Series B (Methodological)*, 32(3):381–394, 1970. Article Stable url: http://www.jstor.org/stable/2984364.

[358] M. Haas. A note on the moments of the skew-normal distribution. *Economics Bulletin*, 32(4):3306–3312, 2012.

[359] G. J. Hahn and R. W. Hendrickson. A table of percentage points of the distribution of the largest absolute value of k student t variates and its applications. *Biometrika*, 58(2):323–332, 1971.

[360] E. Hairer, S. P. Nørsett, and G. Wanner. *Solving Ordinary Differential Equations I: Nonstiff Problems*. Springer, Berlin, 2nd edition, 1993.

[361] B.I. Harley. Relation between the distributions of non-central t and of a transformed correlation coefficient. *Biometrika*, 44(1-2):219–224, 1957.

[362] H. L. Harter. Tables of range and studentized range. *The Annals of Mathematical Statistics*, 31(4):1122–1147, 1960. Article Stable url: http://www.jstor.org/stable/2237810.

[363] N. Hauberg. The non-central nakagami distribution. 2018. Available as http://www2.compute.dtu.dk/Âăsohau/papers/nakagami2018/nakagami.pdf.

[364] Maplesoft Online Help. *EllipticE, EllipticCE*. Maplesoft, 2024. [Online; accessed 22-July-2024]. URL: https://www.maplesoft.com/support/help/maple/view.aspx?path=EllipticE.

[365] Maplesoft Online Help. *EllipticF, EllipticK, EllipticCK*. Maplesoft, 2024. [Online; accessed 22-July-2024]. URL: https://www.maplesoft.com/support/help/maple/view.aspx?path=EllipticF.

[366] Maplesoft Online Help. *EllipticPi, EllipticCPi*. Maplesoft, 2024. [Online; accessed 22-July-2024]. URL: https://www.maplesoft.com/support/help/maple/view.aspx?path=EllipticPi.

[367] Maplesoft Online Help. *KelvinBer, KelvinBei*. Maplesoft, 2024. [Online; accessed 22-July-2024]. URL: https://www.maplesoft.com/support/help/Maple/view.aspx?path=Kelvin.

[368] Nicholas J. Higham. *Accuracy and Stability of Numerical Algorithms*. SIAM, 1st edition, 2002. Online resource: http://www.maths.manchester.ac.uk/Âăhigham/asna/.

[369] Nicholas J. Higham. Accuracy and stability of numerical algorithms - presentation given at 3rd many-core and reconfigurable supercomputing network workshop queen's university, belfast, january 15-16, 2009. 2009. Available as http://cpc.cs.qub.ac.uk/MRSN/higham.pdf.

[370] I. D. Hill, R. Hill, and R. L. Holder. Algorithm as 99: fitting johnson curves by moments. *Journal of the Royal Statistical Society. Series C (Applied Statistics)*, 1976.

[371] Y. Hochberg and A. C. Tamhane. *Multiple comparison procedures*. John Wiley & Sons, Inc., New York, NY, USA, 1987. ISBN 0-471-82222-1.

[372] H.H.H. Homeier. Scalar levin-type sequence transformations. *J. Comp. Appl. Math.*, 122:81–147, 2000. Available as https://arxiv.org/abs/math/0005209.

[373] Harold Hotelling. New light on the correlation coefficient and its transforms. *Journal of the Royal Statistical Society, Series B, Methodological*, 15:193–225, 1953.

[374] S. Hu and M.-S. Kim. On dirichlet's lambda functions. 2018. Available as https://arxiv.org/abs/1806.07762v2.

[375] A.D. Hutson. An alternative skew exponential power distribution formulation. *Commun Stat Theory Methods*, 48(12):3005–3024, 2019. Available as https://doi.org/10.1186/s13662-018-1527-9.

[376] R. James, Langou, J., and B. R. Lowery. On matrix balancing and eigenvector computation. 2014. Available as https://arxiv.org/pdf/1401.5766.pdf.

[377] R. Jaschke. Algorithm as 269: high order cornish-fisher expansion. *Journal of the Royal Statistical Society. Series C (Applied Statistics)*, 41(11):233–240, 2001.

[378] J.L. Jensen. The modified signed likelihood statistic and saddlepoint approximations. *Annals of Mathematical Statistics*, 79:693–703, 1992.

[379] F. Jiménez and P. Pedro Jodrá. A note on the moments and computer generation of the shifted gompertz distribution. *Communications in Statistics - Theory and Methods*, 38(1):75–89, 2008.

[380] F. Jiménez Torres. Estimation of parameters of the shifted gompertz distribution using least squares, maximum likelihood and moments methods. *Journal of Computational and Applied Mathematics*, 255:867–877, 2014.

[381] Z. Jin. On the lucas polynomials and some of their new identities. *Adv Differ Equ*, 2018. Available as https://doi.org/10.1186/s13662-018-1527-9.

[382] P. Jodrá. Systems of frequency curves generated by methods of translation. *Biometrika*, 36(1/2):149–176, 1949.

[383] P. Jodrá. On order statistics from the gompertz–makeham distribution and the lambert w function. *Mathematical Modelling and Analysis*, 18(3):432–445, 2013.

[384] F. Johansson. Characteristic functions in the prob package. 2018. Available as https://cran.r-project.org/web/packages/prob/vignettes/charfunc.pdf.

[385] N. L. Johnson, S. Kotz, and N. Balakrishnan. *Continuous Univariate Distributions, Volume 1*. Wiley & Sons, Inc., New York-London-Sydney-Toronto, 2nd edition, 1994.

[386] N. L. Johnson, S. Kotz, and N. Balakrishnan. *Continuous Univariate Distributions, Volume 2*. Wiley & Sons, Inc., New York-London-Sydney-Toronto, 2nd edition, 1995.

[387] N. L. Johnson, S. Kotz, and N. Balakrishnan. *Univariate discrete distributions*. Wiley & Sons, Inc., New York-London-Sydney-Toronto, 3rd edition, 1995.

[388] M.C. Jones and M.J. Faddy. A skew extension of the t -distribution, with applications. *J. R. Statist. Soc. B*, 65:159–174, 2003.

[389] M.C. Jones and M.J. Faddy. Sinh-arcsinh distributions. *Biometrika*, 96:761–780, 2009.

[390] K. Kelley. Sample size planning for the squared multiple correlation coefficient: accuracy in parameter estimation via narrow confidence intervals. *Multivariate Behavioral Research*, 43:524–555, 2008.

[391] C. Kleiber and S. Kotz. *Statistical Size Distributions in Economics and Actuarial Sciences*. Wiley & Sons, Inc., New York-London-Sydney-Toronto, 2003.

[392] K. Kocherlakota and S. Kocherlakota. On the doubly noncentral t distribution. *Communications in Statistics - Simulation and Computation*, 20(1):23–31, 1991. URL: http://www.tandfonline.com/doi/abs/10.1080/03610919108812936, arXiv:http://www.tandfonline.com/doi/pdf/10.1080/03610919108812936, doi:10.1080/03610919108812936.

[393] P. Koev and A. Edelman. The efficient evaluation of the hypergeometric function of a matrix argument. *Mathematics of Computation*, 75:833–846, 2006. Article Stable url: http://math.mit.edu/Âăplamen/files/hyper.pdf, Software available at http://math.mit.edu/Âăplamen/software/mhgref.html. arXiv:arXiv:math/0505344.

[394] J. Kolassa and P. McCullagh. Edgeworth series for lattice distributions. *The Annals of Statistics*, 18:981–985, 1990.

[395] T.H. Koornwinder, R. S. C. Wong, R. Koekoek, and R. Swarttouw. *Orthogonal Polynomials*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/18.3.

[396] Kotz, S. and S. Nadarajah. *Extreme Value Distributions. Theory and Applications*. London: Imperial College Press, 2000.

[397] S.N. Krivoshapko and V.N. Ivanov. *Encyclopedia of Analytical Surfaces*. Springer International Publishing Switzerland, 2015.

[398] K.L. Kuhlman. Review of inverse laplace transform algorithms for laplace-space numerical approaches. *Numerical Algorithms*, 62:339–355, 2013.

[399] R. W. Kulp and B. N. Nagarsenker. An asymptotic expansion of the nonnull distribution of wilks criterion for testing the multivariate linear hypothesis. *The Annals of Statistics*, 12(4):1576–1583, 1984. Available at http://http://projecteuclid.org/euclid.aos/1176346816.

[400] D. Kumar. Accurately computing log(1-\exp (-|a|)). assessed from the rmpfr package. *International Journal of System Assurance Engineering and Management*, 2017. Available at https://www.researchgate.net/publication/315464331_The_Singh-Maddala_distribution_properties_and_estimation.

[401] W. Kutta. Beitrag zur näherungsweisen integration totaler differentialgleichungen. *Zeitschrift für Mathematik und Physik*, 46:435–453, 1901.

[402] Y.-S. Lee and T.-K. Lin. Algorithm as 269: high order cornish-fisher expansion. *Journal of the Royal Statistical Society. Series C (Applied Statistics)*, 41(1):233–240, 1992. Article Stable url: http://www.jstor.org/stable/2347649.

[403] Yoong-Sin Lee. Asymptotic formulae for the distribution of a multivariate test statistic: power comparisons of certain multivariate tests. *Biometrika*, 58:647–651, 1971.

[404] Yoong-Sin Lee. Distribution of the canonical correlations and asymptotic expansions for distributions of certain independent test statistics. *The Annals of Mathematical Statistics*, 42:526–537, 1971. Available at http://projecteuclid.org/euclid.aoms/1177693403.

[405] Yoong-Sin Lee. Some results on the sampling distribution of the multiple correlation coefficient. *Journal of the Royal Statistical Society, Series B, Methodological*, 33:117–130, 1971.

[406] Yoong-Sin Lee. Tables of upper percentage points of the multiple correlation coefficient. *Biometrika*, 59:175–189, 1972.

[407] D.V. Lindley. Fiducial distributions and Bayes' theorem. *Journal of the Royal Statistical Society. Series B (Methodological)*, pages 102.107, 1958.

[408] Robert Lugannani and Stephen Rice. Saddle point approximation for the distribution of the sum of independent random variables. *Advances in Applied Probability*, 12(2):475–490, 1980.

[409] F.J. Marques, C.A. Coelho, and B.C. Arnold. A general near-exact distribution theory for the most common likelihood ratio test statistics used in multivariate analysis. *Test*, 20:180 – 203, 2011.

[410] J.W. Mauchly. Significance test for sphericity of a normal nvariate distribution. *Annals of Mathematical Statistics*, 11:204–209, 1940.

[411] J. Meier. *Tanh Spirale*. Parametrische Flächen und Körper, 2020. [Online; last edited on 13 April 2020; accessed 22-Dec-2024]. URL: http://www.3d-meier.de/tut3/Seite190.html.

[412] N. Michel. Precise coulomb wave functions for a wide range of complex l, eta and z. *Comput. Phys. Comm.*, 2007. Available as http://arxiv.org/abs/physics/0702051v1.

[413] R. C Milton. *Rank Order Probabilities. Two-Sample Normal Shift Alternatives*. Wiley & Sons, Inc., New York-London-Sydney-Toronto, 1970.

[414] M. Mori. *Developments in the double exponential formula for numerical integration, Proceedings of the International Congress of Mathematicians, Kyoto 1990*. Springer-Verlag, Berlin, 1991.

[415] J. J. Moré, B. S. Garbow, and K. E. Hillstrom. User guide for minpack-1, argonne national laboratory report anl-80-74, argonne, ill. 1980. Available as http://www.mcs.anl.gov/Âămore/ANL8074a.pdf (Chapter 1-3) and http://www.mcs.anl.gov/Âămore/ANL8074b.pdf (Chapter 4).

[416] R. J. Muirhead. *Aspects of Multivariate Statistical Theory*. John Wiley and Sons, 1982.

[417] R.J. Muirhead and Y. Chikuse. Approximations for the distributions of the extreme latent roots of three matrices. *Ann. Inst. Statist. Math.*, 27:473–478, 2007. Available as http://arxiv.org/abs/physics/0702051v1.

[418] H. Murakami and T. Kamakura. A saddlepoint approximation to a nonparametric test for ordered alternatives. *Journal of the Japan Statistical Society*, 39(2):143–153, dec 2009. URL: http://ci.nii.ac.jp/naid/10025991989/en/, doi:.

[419] B. N. Nagarsenker and J. Suniaga. Distributions of a class of statistics useful in multivariate analysis. *Journal of the American Statistical Association*, 78(382):472–475, 1983. URL: http://www.tandfonline.com/doi/abs/10.1080/01621459.1983.10477998, arXiv:http://www.tandfonline.com/doi/pdf/10.1080/01621459.1983.10477998, doi:10.1080/01621459.1983.10477998.

[420] S.C. Narula. Orthogonal polynomial regression for unequal spacing and frequencies. *Journal of Quality Technology*, 10:170–179, 1978.

[421] V. Nijimbere. Evaluation of some non-elementary integrals involving sine, cosine, exponential and logarithmic integrals: part 1. *Ural Mathematical Journal*, 2017.

[422] G.E. Noether. *Elements of nonparametric statistics*. SIAM series in applied mathematics. Wiley, 1967. URL: http://books.google.co.uk/books?id=BgFxIPl7tNAC.

[423] R. G. O'Brien and G. Shieh. Pragmatic, unifying algorithm gives power probabilities for common f tests of the multivariate general linear hypothesis. 1992. Poster presented at the American Statistical Association Meetings, Boston, Statistical Computing Section. Also, paper in review, downloadable in PDF form from http://www.bio.ri.ccf.org/UnifyPow.

[424] Robert E. Odeh. *Confidence limits on the correlation coefficient. In: Selected Tables in Mathematical Statistics, Vol. 10*. American Mathematical Society, 1986.

[425] The On-Line Encyclopedia of Integer Sequences. Hyperfactorials: product_k = 1..n k^k. 2000.

[426] The On-Line Encyclopedia of Integer Sequences. Superfactorials: product of first n factorials. 2000.

[427] T. Okayama. Explicit error bound for the tanh rule and the de formula for integrals with logarithmic singularity. *JSIAM Letters*, 6:9 – 11, 2014.

[428] T. Okayama, T. Matsuo, and M. Sugihara. Error estimates with explicit constants for sinc approximation, sinc quadrature and sinc indefinite integration. *Numerische Mathematik*, 124:361 – 394, 2013.

[429] Tomoaki Okayama. Explicit error bound for modified numerical iterated integration by means of sinc methods. In *Revised Selected Papers of the 6th International Conference on Mathematical Aspects of Computer and Information Sciences - Volume 9582*, MACIS 2015, 202–217. New York, NY, USA, 2016. Springer-Verlag New York, Inc. URL: http://dx.doi.org/10.1007/978-3-319-32859-1_17, doi:10.1007/978-3-319-32859-1_17.

[430] I. Olkin and S. J. Press. Testing and estimation for a circular stationary model. *Annals of Mathematical Statistics*, 40:1358–1373, 1969.

[431] F. W. J. Olver. *Airy Functions*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/9.2.

[432] F. W. J. Olver. *Error Functions - Dawson's Integral*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/7.2#E5.

[433] F. W. J. Olver. *Error Functions - Faddeeva function*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/7.2#E3.

[434] F. W. J. Olver. *Error Functions - Goodwin-Staton Integral*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/7.2#E12.

[435] F. W. J. Olver. *Error Functions - Repeated Integrals of the Complementary Error Function*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/7.18.

[436] F. W. J. Olver. *Scorer Functions*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/9.12.

[437] F. W. J. Olver. *Voigt Functions*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/7.19.

[438] F. W. J. Olver and L. Maximon. *Bessel Function of the First Kind*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/10.2#E2.

[439] F. W. J. Olver and L. Maximon. *Bessel Function of the Second Kind*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/10.2#E3.

[440] L. Olver, F. W. J.; Maximon. *Bessel Function Zeros*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/10.25#E2.

[441] L. Olver, F. W. J.; Maximon. *Hankel Functions*. NIST Digital Library of Mathematical Functions, 2010. URL: http://dlmf.nist.gov/10.2.E5.

[442] L. Olver, F. W. J.; Maximon. *Kelvin Functions - Definitions*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/10.61.

[443] L. Olver, F. W. J.; Maximon. *Modified Bessel Function of the First Kind*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/10.25#E2.

[444] L. Olver, F. W. J.; Maximon. *Modified Bessel Function of the Second Kind*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/10.25#E3.

[445] L. Olver, F. W. J.; Maximon. *Spherical Bessel Functions*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/10.47.

[446] L. Olver, F. W. J.; Maximon. *Spherical Hankel Functions*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/10.47.

[447] Ooura, T. and Mori. M. The double exponential formula for oscillatory functions over the half infinite interval. *Journal of Computational and Applied Mathematics*, 38:353–360, 1991.

[448] Ooura, T. and Mori. M. A robust double exponential formula for fourier-type integrals. *Journal of computational and applied mathematics*, 112:229–241, 1999.

[449] T. Ooura. A double exponential formula for the fourier transforms. *Publ. RIMS, Kyoto Univ.*, 41:971–977, 2005. Available as https://pdfs.semanticscholar.org/16ec/a5d76fd6b3d7acaaff0b2a6e8a70caa70190.pdf.

[450] E. Orjebin. A recursive formula for the moments of a truncated univariate normal distribution. *The School of Mathematics and Physics, The University of Queensland, Australia*, 2014. URL: https://people.smp.uq.edu.au/YoniNazarathy/teaching_projects/studentWork/EricOrjebin_TruncatedNormalMoments.pdf.

[451] D. B. Owen. Tables for computing bivariate normal probabilities. *Ann. Math. Statist.*, 27:1075–1090, 1956. Available as http://projecteuclid.org/DPubS/Repository/1.0/Disseminate?view=body&id=pdf_1&handle=euclid.aoms/1177728074.

[452] D. B. Owen. A survey of properties and applications of the noncentral `t`-distribution. *Technometrics*, 10:445–478, 1968.

[453] M. S Paolella. *Fundamental Probability: A Computational Approach*. Wiley & Sons, Inc., New York-London-Sydney-Toronto, 2006.

[454] M. S Paolella. *Intermediate Probability: A Computational Approach*. Wiley & Sons, Inc., New York-London-Sydney-Toronto, 2007.

[455] R. B. Paris. *Anger–Weber Functions*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/11.10.

[456] R. B. Paris. *Incomplete beta function*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/8.17.

[457] R. B. Paris. *Incomplete gamma function*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/8.2#i.

[458] R. B. Paris. *Lommel Functions*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/11.9.

[459] R. B. Paris. *Struve and Modified Struve Functions*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/11.2.

[460] R. B. Paros. *Generalized Exponential Integral*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/8.19.

[461] M. Patefield and D. Tand. Fast and accurate calculation of owen's t-function. *Journal of Statistical Software*, 2000. Available as http://www.jstatsoft.org/v05/i05/paper.

[462] P. B. Patnaik. The noncentral `\chi ^2`and `F`-distributions and their applications. *Biometrika*, 36:202—232, 1949.

[463] David B. Peizer and John W. Pratt. A normal approximation for binomial, `F`, beta, and other common, related tail probabilities. i (Ref: p1457-1483). *Journal of the American Statistical Association*, 63:1416–1456, 1968.

[464] S. Penev and T. Raykov. A wiener germ approximation of the noncentral chi square distribution and of its quantiles. *Computational Statistics*, 15:219–228, 2000. Preprint available at http://www.researchgate.net/publication/2648631_A_Wiener_Germ_Approximation_of_the_Noncentral_Chi_Square_Distribution_and_of_Its_Quantiles.

[465] K. Petras. Self-validating integration and approximation of piecewise analytic functions. *Journal of Computational and Applied Mathematics*, 145:345 – 359, 2002.

[466] K. Petras. Principles of verified numerical integration. *Journal of Computational and Applied Mathematics*, 199:317 – 328, 2007.

[467] T. Pham-Gia. Exact distribution of the generalized wilks' statistic and applications. *Journal of Multivariate Analysis*, 99(8):1698–1716, 2008. Available at http://www.sciencedirect.com/science/article/pii/S0047259X08000249. URL: http://www.sciencedirect.com/science/article/pii/S0047259X08000249, doi:http://dx.doi.org/10.1016/j.jmva.2008.01.021.

[468] R. Piessens, E. de Doncker-Kapenga, C.W. Überhuber, and D. Kahaner. *QUADPACK: A subroutine package for automatic integration*. Springer-Verlag, 1983. ISBN 978-3-540-12553-2. Public domain Fortran source: http://www.netlib.org/quadpack/.

[469] K.C.S Pillai and Young. On the exact distribution of hotelling's generalized t2. *Journal of Multivariate Analysis*, 99:90–107, 1971.

[470] J.F. Pires, A. H. M. A. Cysneiros, and F. Cribari-Netob. Improved inference for the generalized pareto distribution. *Brazilian Journal of Probability and Statistics*, 32:69–85, 2018. doi:http://dx.doi.org/10.1016/j.jmva.2008.01.021.

[471] M. J. D. Powell. *A hybrid method for nonlinear equations*. Numerical methods for nonlinear algebraic equations, Philip Rabinowitz, editor, chapter 6, pages 87-114, Gordon and Breach Science Publishers, New York, 1970.

[472] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery. *Numerical Recipes: The Art of Scientific Computing*. Cambridge University Press, 3rd edition, 2007. Available from http://www.nr.com/.

[473] J. Reig, V. M. Rodrigo Peñarrocha, L. Rubio, M. T. Martínez-Inglés, and J. M. Molina-García-Pardo. The folded normal distribution: a new model for the small-scale fading in line-of-sight (los) condition. *IEEE Access*, 7:77328–77339, 2019.

[474] P. L. Reinhardt, W. P.; Walker. *Jacobian Elliptic Functions - Definitions*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/22.2.

[475] P. L. Reinhardt, W. P.; Walker. *Jacobi's Amplitude(am) Function*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/22.16.

[476] P. L. Reinhardt, W. P.; Walker. *Theta Functions*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/20.2.

[477] M.I. Riffi. A generalized transmuted gompertz-makeham distribution. *Journal of Scientific and Engineering Research*, 5:252–266, 2018.

[478] H. Rinne. *Taschenbuch der Statistik*. Frankfurt, M. : Deutsch, 4 edition, 2008.

[479] M.M. Ristić, B.V. Popović, and S. Nadarajah. Libby and novick's generalized beta exponential distribution. *Journal of Statistical Computation and Simulation*, 2013.

[480] Pierre Robillard. Kendall's S Distribution with Ties in One Ranking. *Journal of the American Statistical Association*, 67(338):453–455, 1972. URL: http://www.tandfonline.com/doi/abs/10.1080/01621459.1972.10482409, arXiv:http://www.tandfonline.com/doi/pdf/10.1080/01621459.1972.10482409, doi:10.1080/01621459.1972.10482409.

[481] R. N. Rodriguez. A guide to singh-maddala distributions. *Biometrika*, 64:129–134, 1977.

[482] F.W.J. Roy, R.; Olver. *Binomial Coefficients*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/1.2#i.

[483] F.W.J. Roy, R.; Olver. *Hyperbolic functions*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/4.28.

[484] F.W.J. Roy, R.; Olver. *Inverse Hyperbolic Functions*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/4.37.

[485] F.W.J. Roy, R.; Olver. *Inverse Trigonometric Functions*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/4.23.

[486] F.W.J. Roy, R.; Olver. *Lambert W-Function*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/4.13.

[487] F.W.J. Roy, R.; Olver. *Powers with General Bases*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/4.2#iv.

[488] F.W.J. Roy, R.; Olver. *The Exponential Function*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/4.2#iii.

[489] F.W.J. Roy, R.; Olver. *The Logarithm*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/4.2#i.

[490] F.W.J. Roy, R.; Olver. *Trigonometric functions*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/4.14.

[491] H. Ruben. Some new results on the distribution of the sample correlation coefficient. *Journal of the Royal Statistical Society, Series B, Methodological*, 28:513–525, 1966.

[492] S. M. Rump. Über die numerische auflösung von differentialgleichungen. *Mathematische Annalen, Springer*, 46(2):167–178, 1895.

[493] E. Schröder. Über unendlich viele algorithmen zur auflösung der gleichungen. *Mathematische Annalen, Springer*, 2:317–365, 1870.

[494] G.A.F. Seber. The non-central chi-square and beta distributions. *Biometrika*, 50:542–544, 1963.

[495] R. A. Shorack. Recursive generation of the distribution of the mann-whitney-wilcoxon u-statistic under generalized lehmann alternatives. *Annals of Mathematical Statistics*, 37(1):284–286, 1966. Available at http://projecteuclid.org/euclid.aoms/1177699621.

[496] R. A. Shorack. Tables of the distribution of the mann-whitney-wilcoxon u-statistic under lehmann alternatives. *Technometrics*, 9(4):666–677, 1967.

[497] R.T. Short. Computation of rice and noncentral chi-squared probabilities. 2012. Available as http://www.mcs.anl.gov/Âămore/ANL8074a.pdf.

[498] A. Sidi. *Practical Extrapolation Methods: Theory and Applications*. Cambridge Monographs on Applied and Computational Mathematics). Cambridge: Cambridge University Press., 2003.

[499] J.H. Skillings. On the null distribution of Jonckheere's statistic used in two way models for ordered alternatives. *Technometrics*, 22:431–436, 1980.

[500] Kadry S. Smaili K., Kadri T. Hypoexponential distribution with different parameters. *Applied Mathematics*, 4:431–436, 2013.

[501] B. Snow. The third moment of kendall's tau in normal samples. *Biometrika*, 49(1-2):177–183, 1962.

[502] W.C. Soong. Exact simultaneous confidence intervals for multiple comparisons with the mean. *Computational Statistics & Data Analysis*, 37:33–47, 2001.

[503] H. Stehfest. Algorithm 368: numerical inversion of laplace transforms. *Communications of the ACM*, 13(1):47–49, 1970.

[504] Rod Stephens. *WPF 3d: Three-Dimensional Graphics with WPF and C#*. CreateSpace Independent Publishing Platform, 2018. ISBN 978-1983905964. [Online; accessed 22-July-2024]. URL: https://github.com/WriterRod/WPF-3d-source.

[505] M. R. Stoline and H. K. Ury. Tables of the studentized maximum modulus distribution and an application to multiple comparisons among means. *Technometrics*, 21(1):269–271, 1979. Article Stable url: http://www.jstor.org/stable/1268584.

[506] Kathleen Subrahmaniam and Kocherlakota Subrahmaniam. Some extensions to miss f. n. david's tables of sample correlation coefficient: distribution function and percentiles. *Sankhya, Series B, Indian Journal of Statistics*, 45:75–147, 1983.

[507] R. M. Sundrum. Moments of the rank correlation coefficient tau in the general case. *Biometrika*, 40(3/4):409–420, 1953. Article Stable url: http://www.jstor.org/stable/2333357.

[508] R. M. Sundrum. A further approximation to the distribution of wilcoxon's statistic in the general case. *Journal of the Royal Statistical Society. Series B (Methodological)*, 16(2):255–260, 1954. Article Stable url: http://www.jstor.org/stable/2984051, a draft manuscript as available at http://repository.lib.ncsu.edu/dr/bitstream/1840.4/2253/1/ISMS_1954_89.pdf.

[509] H. Takahasi and M. Mori. Double exponential formulas for numerical integration. *Publications of the Research Institute for Mathematical Sciences, Kyoto University*, 9:721 – 741, 1974.

[510] A. Talbot. The accurate numerical inversion of laplace transforms. *IMA Journal of Applied Mathematics*, 23(1):97, 1979.

[511] J. Tang and A.K. Gupta. On the distribution of the product of independent beta random variables. *Statistics & Probability Letters*, 2:165–168, 1984.

[512] V. E. Tarasov. Some identities with generalized hypergeometric functions. *Appl. Math. Inf. Sci.*, 10:1729–1734, 2016.

[513] R Core Team. *The (non-central) Beta Distribution*. The R Project for Statistical Computing, 2019. [Online; accessed 22-July-2024]. URL: https://www.rdocumentation.org/packages/stats/versions/3.6.2/topics/Beta.

[514] R Core Team. *The (non-central) Chi-Squared Distribution*. The R Project for Statistical Computing, 2019. [Online; accessed 22-July-2024]. URL: https://www.rdocumentation.org/packages/stats/versions/3.6.2/topics/Chisquare.

[515] R Core Team. *The (non-central) F Distribution*. The R Project for Statistical Computing, 2019. [Online; accessed 22-July-2024]. URL: https://www.rdocumentation.org/packages/stats/versions/3.6.2/topics/FDist.

[516] R Core Team. *The (non-central) Student t Distribution*. The R Project for Statistical Computing, 2019. [Online; accessed 22-July-2024]. URL: https://www.rdocumentation.org/packages/stats/versions/3.6.2/topics/TDist.

[517] R Core Team. *The Beta Distribution*. The R Project for Statistical Computing, 2019. [Online; accessed 22-July-2024]. URL: https://www.rdocumentation.org/packages/stats/versions/3.6.2/topics/Beta.

[518] R Core Team. *The Cauchy Distribution*. The R Project for Statistical Computing, 2019. [Online; accessed 22-July-2024]. URL: https://www.rdocumentation.org/packages/stats/versions/3.6.2/topics/Cauchy.

[519] R Core Team. *The Chi-Squared Distribution*. The R Project for Statistical Computing, 2019. [Online; accessed 22-July-2024]. URL: https://www.rdocumentation.org/packages/stats/versions/3.6.2/topics/Chisquare.

[520] R Core Team. *The Exponential Distribution*. The R Project for Statistical Computing, 2019. [Online; accessed 22-July-2024]. URL: https://www.rdocumentation.org/packages/stats/versions/3.6.2/topics/Exponential.

[521] R Core Team. *The F Distribution*. The R Project for Statistical Computing, 2019. [Online; accessed 22-July-2024]. URL: https://www.rdocumentation.org/packages/stats/versions/3.6.2/topics/FDist.

[522] R Core Team. *The Gamma Distribution*. The R Project for Statistical Computing, 2019. [Online; accessed 22-July-2024]. URL: https://www.rdocumentation.org/packages/stats/versions/3.6.2/topics/GammaDist.

[523] R Core Team. *The Log Normal Distribution*. The R Project for Statistical Computing, 2019. [Online; accessed 22-July-2024]. URL: https://www.rdocumentation.org/packages/stats/versions/3.6.2/topics/Lognormal.

[524] R Core Team. *The Normal Distribution*. The R Project for Statistical Computing, 2019. [Online; accessed 22-July-2024]. URL: https://www.rdocumentation.org/packages/stats/versions/3.6.2/topics/Normal.

[525] R Core Team. *The Student t Distribution*. The R Project for Statistical Computing, 2019. [Online; accessed 22-July-2024]. URL: https://www.rdocumentation.org/packages/stats/versions/3.6.2/topics/TDist.

[526] R Core Team. *Distribution of the Wilcoxon Rank Sum Statistic*. The R Project for Statistical Computing, 2020. [Online; accessed 22-July-2024]. URL: https://www.rdocumentation.org/packages/stats/versions/3.6.2/topics/Wilcoxon.

[527] R Core Team. *Distribution of the Wilcoxon Signed Rank Statistic*. The R Project for Statistical Computing, 2020. [Online; accessed 22-July-2024]. URL: https://www.rdocumentation.org/packages/stats/versions/3.6.2/topics/SignRank.

[528] R Core Team. *The Binomial Distribution*. The R Project for Statistical Computing, 2020. [Online; accessed 22-July-2024]. URL: https://www.rdocumentation.org/packages/stats/versions/3.6.2/topics/Binomial.

[529] R Core Team. *The Geometric Distribution*. The R Project for Statistical Computing, 2020. [Online; accessed 22-July-2024]. URL: https://www.rdocumentation.org/packages/stats/versions/3.6.2/topics/Geometric.

[530] R Core Team. *The Hypergeometric Distribution*. The R Project for Statistical Computing, 2020. [Online; accessed 22-July-2024]. URL: https://www.rdocumentation.org/packages/stats/versions/3.6.2/topics/Hypergeometric.

[531] R Core Team. *The Negative Binomial Distribution*. The R Project for Statistical Computing, 2020. [Online; accessed 22-July-2024]. URL: https://www.rdocumentation.org/packages/stats/versions/3.6.2/topics/NegBinomial.

[532] R Core Team. *The Poisson Distribution*. The R Project for Statistical Computing, 2020. [Online; accessed 22-July-2024]. URL: https://www.rdocumentation.org/packages/stats/versions/3.6.2/topics/Poisson.

[533] R Core Team. *The Studentized Range Distribution*. The R Project for Statistical Computing, 2020. [Online; accessed 22-July-2024]. URL: https://www.rdocumentation.org/packages/stats/versions/3.6.2/topics/Tukey.

[534] R Core Team. *The Uniform Distribution*. The R Project for Statistical Computing, 2020. [Online; accessed 22-July-2024]. URL: https://www.rdocumentation.org/packages/stats/versions/3.6.2/topics/Uniform.

[535] R Core Team. *The Weibull Distribution*. The R Project for Statistical Computing, 2020. [Online; accessed 22-July-2024]. URL: https://www.rdocumentation.org/packages/stats/versions/3.6.2/topics/Weibull.

[536] The Mpmath Development Team. *Auxiliary function Sincpi*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2008. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/trigonometric.html#sincpi.

[537] The Mpmath Development Team. *CDF of the normal distribution*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2008. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/expintegrals.html#ncdf.

[538] The Mpmath Development Team. *CosPi*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2008. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/trigonometric.html#cospi.

[539] The Mpmath Development Team. *Cosine*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2008. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/trigonometric.html#cos.

[540] The Mpmath Development Team. *Cube root*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2008. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/powers.html#cbrt.

[541] The Mpmath Development Team. *Density of the normal distribution*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2008. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/expintegrals.html#npdf.

[542] The Mpmath Development Team. *Error Function complement erfc*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2008. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/expintegrals.html#erfc.

[543] The Mpmath Development Team. *Error Function erf*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2008. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/expintegrals.html#erf.

[544] The Mpmath Development Team. *Error Function erfi*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2008. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/expintegrals.html#erfi.

[545] The Mpmath Development Team. *Exponential Function*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2008. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/powers.html#exp.

[546] The Mpmath Development Team. *Exponential Function expm1*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2008. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/powers.html#expm1.

[547] The Mpmath Development Team. *General incomplete beta function*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2008. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/gamma.html#betainc.

[548] The Mpmath Development Team. *Incomplete gamma function, general form*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2008. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/expintegrals.html#gammainc.

[549] The Mpmath Development Team. *Inverse of the Error Function*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2008. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/expintegrals.html#erfinv.

[550] The Mpmath Development Team. *Logarithm.function log1p*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2008. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/powers.html#log1p.

[551] The Mpmath Development Team. *Logarithm.function, base 10*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2008. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/powers.html#log10.

[552] The Mpmath Development Team. *Logarithm.function, base e*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2008. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/powers.html#ln.

[553] The Mpmath Development Team. *Power function*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2008. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/powers.html#power.

[554] The Mpmath Development Team. *SinPi*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2008. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/trigonometric.html#sinpi.

[555] The Mpmath Development Team. *Sine*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2008. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/trigonometric.html#sin.

[556] The Mpmath Development Team. *Square root*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2008. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/powers.html#sqrt.

[557] The Mpmath Development Team. *Cosecant*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2009. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/trigonometric.html#csc.

[558] The Mpmath Development Team. *Cotangent*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2009. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/trigonometric.html#cot.

[559] The Mpmath Development Team. *Hyperbolic Cosecant*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2009. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/hyperbolic.html#csch.

[560] The Mpmath Development Team. *Hyperbolic Cosine*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2009. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/hyperbolic.html#cosh.

[561] The Mpmath Development Team. *Hyperbolic Cotangent*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2009. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/hyperbolic.html#coth.

[562] The Mpmath Development Team. *Hyperbolic Secant*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2009. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/hyperbolic.html#sech.

[563] The Mpmath Development Team. *Hyperbolic Sine*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2009. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/hyperbolic.html#sinh.

[564] The Mpmath Development Team. *Hyperbolic Tangent*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2009. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/hyperbolic.html#tanh.

[565] The Mpmath Development Team. *Inverse Cosecant*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2009. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/trigonometric.html#acsc.

[566] The Mpmath Development Team. *Inverse Cosine*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2009. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/trigonometric.html#acos.

[567] The Mpmath Development Team. *Inverse Cotangent*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2009. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/trigonometric.html#acot.

[568] The Mpmath Development Team. *Inverse Hyperbolic Cosecant*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2009. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/hyperbolic.html#acsch.

[569] The Mpmath Development Team. *Inverse Hyperbolic Cosine*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2009. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/hyperbolic.html#acosh.

[570] The Mpmath Development Team. *Inverse Hyperbolic Cotangent*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2009. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/hyperbolic.html#acoth.

[571] The Mpmath Development Team. *Inverse Hyperbolic Secant*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2009. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/hyperbolic.html#atanh.

[572] The Mpmath Development Team. *Inverse Hyperbolic Sine*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2009. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/hyperbolic.html#asinh.

[573] The Mpmath Development Team. *Inverse Hyperbolic Tangent*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2009. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/hyperbolic.html#atanh.

[574] The Mpmath Development Team. *Inverse Secant*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2009. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/trigonometric.html#asec.

[575] The Mpmath Development Team. *Inverse Sine*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2009. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/trigonometric.html#asin.

[576] The Mpmath Development Team. *Inverse Tangent*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2009. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/trigonometric.html#atan.

[577] The Mpmath Development Team. *Secant*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2009. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/trigonometric.html#sec.

[578] The Mpmath Development Team. *Tangent*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2009. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/trigonometric.html#tan.

[579] The Mpmath Development Team. *Bernoulli number*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2010. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/numtheory.html#bernoulli.

[580] The Mpmath Development Team. *Bernoulli polynomial*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2010. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/numtheory.html#bernpoly.

[581] The Mpmath Development Team. *Bessel functions of the first kind*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2010. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/bessel.html#besselj.

[582] The Mpmath Development Team. *Bessel functions of the second kind*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2010. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/bessel.html#besselj.

[583] The Mpmath Development Team. *Beta Function*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2010. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/gamma.html#loggamma.

[584] The Mpmath Development Team. *Binomial coefficient*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2010. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/gamma.html#binomial.

[585] The Mpmath Development Team. *Factorial*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2010. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/gamma.html#factorial-fac.

[586] The Mpmath Development Team. *Falling factorial*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2010. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/gamma.html#ff.

[587] The Mpmath Development Team. *Gamma Function*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2010. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/gamma.html#gamma.

[588] The Mpmath Development Team. *Hypergeometric function 0F1*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2010. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/hypergeometric.html#hyp0f1.

[589] The Mpmath Development Team. *Hypergeometric function 1F1 (Kummer)*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2010. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/hypergeometric.html#hyp1f1.

[590] The Mpmath Development Team. *Hypergeometric function 2F1 (Gauss)*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2010. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/hypergeometric.html#hyp1f1.

[591] The Mpmath Development Team. *Hypergeometric function U (Tricomi)*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2010. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/hypergeometric.html#hyp1f1.

[592] The Mpmath Development Team. *Lambert W function*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2010. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/powers.html#lambert-w-function.

[593] The Mpmath Development Team. *LogGamma Function*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2010. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/gamma.html#loggamma.

[594] The Mpmath Development Team. *Modified Bessel Function of the First Kind*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2010. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/bessel.html#besselj.

[595] The Mpmath Development Team. *Modified Bessel Function of the Second Kind*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2010. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/bessel.html#besselj.

[596] The Mpmath Development Team. *Polygamma function*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2010. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/powers.html#lambert-w-function.

[597] The Mpmath Development Team. *Rising factorial*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2010. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/gamma.html#rf.

[598] The Mpmath Development Team. *Apéry's Constant*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2011. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/constants.html#apery-s-constant-apery.

[599] The Mpmath Development Team. *Arithmetic-Geometric Mean*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2011. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/powers.html#agm.

[600] The Mpmath Development Team. *Base of natural logarithm*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2011. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/constants.html#base-of-the-natural-logarithm-e.

[601] The Mpmath Development Team. *Cardinal sine sinc*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2011. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/trigonometric.html#sinc.

[602] The Mpmath Development Team. *Catalan's Constant*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2011. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/constants.html#catalan-s-constant-catalan.

[603] The Mpmath Development Team. *Degree constant*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2011. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/constants.html#degree-degree.

[604] The Mpmath Development Team. *Digamma function*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2011. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/gamma.html#psi-digamma.

[605] The Mpmath Development Team. *DoubleFactorial*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2011. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/gamma.html#fac2.

[606] The Mpmath Development Team. *Euler Number*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2011. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/numtheory.html#eulernum.

[607] The Mpmath Development Team. *Euler Polynomial*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2011. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/numtheory.html#eulerpoly.

[608] The Mpmath Development Team. *Euler-Mascheroni Constant*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2011. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/constants.html#euler-s-constant-euler.

[609] The Mpmath Development Team. *Glaisher-Kinkelin Constant*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2011. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/constants.html#glaisher-s-constant-glaisher.

[610] The Mpmath Development Team. *Golden Ratio*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2011. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/constants.html#golden-ratio-phi.

[611] The Mpmath Development Team. *Harmonic Number*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2011. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/gamma.html#harmonic.

[612] The Mpmath Development Team. *Hypotenuse*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2011. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/powers.html#hypot.

[613] The Mpmath Development Team. *Inverse tangent (2 real arguments)*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2011. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/trigonometric.html#atan2.

[614] The Mpmath Development Team. *Khinchin's Constant*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2011. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/constants.html#khinchin-s-constant-khinchin.

[615] The Mpmath Development Team. *Pi*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2011. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/constants.html#pi-pi.

[616] The Mpmath Development Team. *Power function powm1*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2011. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/powers.html#powm1.

[617] The Mpmath Development Team. *nth Root*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2011. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/powers.html#root.

[618] The Mpmath Development Team. *Airy Ai Function*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2012. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/bessel.html#airyai.

[619] The Mpmath Development Team. *Airy Bi Function*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2012. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/bessel.html#airybi.

[620] The Mpmath Development Team. *Associated Legendre Polynomial Plm*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2012. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/orthogonal.html#legenp.

[621] The Mpmath Development Team. *Associated Legendre Polynomial Qlm*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2012. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/orthogonal.html#legenq.

[622] The Mpmath Development Team. *Barnes G-function*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2012. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/gamma.html#barnesg.

[623] The Mpmath Development Team. *Chebyshev Polynomial of the First Kind*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2012. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/orthogonal.html#chebyt.

[624] The Mpmath Development Team. *Chebyshev Polynomial of the Second Kind*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2012. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/orthogonal.html#chebyu.

[625] The Mpmath Development Team. *Gegenbauer Polynomial*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2012. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/orthogonal.html#gegenbauer.

[626] The Mpmath Development Team. *Hankel Function H1*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2012. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/bessel.html#hankel1.

[627] The Mpmath Development Team. *Hankel Function H2*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2012. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/bessel.html#hankel2.

[628] The Mpmath Development Team. *Hermite Polynomial*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2012. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/orthogonal.html#hermite.

[629] The Mpmath Development Team. *Hyperfactorial*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2012. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/gamma.html#hyperfac.

[630] The Mpmath Development Team. *Jacobi Polynomial*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2012. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/orthogonal.html#jacobi.

[631] The Mpmath Development Team. *Laguerre Polynomial*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2012. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/orthogonal.html#laguerre-polynomials.

[632] The Mpmath Development Team. *Legendre Polynomial*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2012. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/orthogonal.html#legendre.

[633] The Mpmath Development Team. *Spherical Harmonic*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2012. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/orthogonal.html#spherical-harmonics.

[634] The Mpmath Development Team. *Superfactorial*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2012. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/gamma.html#superfac.

[635] The Mpmath Development Team. *Zeros of Airy Ai Function*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2012. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/bessel.html#airyaizero.

[636] The Mpmath Development Team. *Zeros of Airy Bi Function*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2012. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/bessel.html#airybizero.

[637] The Mpmath Development Team. *Zeros of Bessel Functions of the First Kind*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2012. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/bessel.html#besseljzero.

[638] The Mpmath Development Team. *Zeros of Bessel Functions of the Second Kind*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2012. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/bessel.html#besselyzero.

[639] The Mpmath Development Team. *Carlson Elliptic Integral RC*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2013. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/elliptic.html#elliprc.

[640] The Mpmath Development Team. *Carlson Elliptic Integral RD*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2013. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/elliptic.html#elliprd.

[641] The Mpmath Development Team. *Carlson Elliptic Integral RF*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2013. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/elliptic.html#elliprf.

[642] The Mpmath Development Team. *Carlson Elliptic Integral RG*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2013. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/elliptic.html#elliprg.

[643] The Mpmath Development Team. *Carlson Elliptic Integral RJ*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2013. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/elliptic.html#elliprj.

[644] The Mpmath Development Team. *Chi*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2013. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/expintegrals.html#chi.

[645] The Mpmath Development Team. *Complete Elliptic Integral of the First Kind*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2013. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/elliptic.html#ellipk.

[646] The Mpmath Development Team. *Complete Elliptic Integral of the Second Kind*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2013. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/elliptic.html#ellipf.

[647] The Mpmath Development Team. *Cosine Integral*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2013. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/expintegrals.html#ci.

[648] The Mpmath Development Team. *Exponential Integral E1*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2013. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/expintegrals.html#e1.

[649] The Mpmath Development Team. *Exponential Integral Ei*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2013. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/expintegrals.html#ei.

[650] The Mpmath Development Team. *Exponential Integral En*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2013. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/expintegrals.html#expint.

[651] The Mpmath Development Team. *Fresnel Integral C*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2013. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/expintegrals.html#fresnelc.

[652] The Mpmath Development Team. *Fresnel Integral S*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2013. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/expintegrals.html#fresnels.

[653] The Mpmath Development Team. *General Elliptic Function*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2013. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/elliptic.html#ellipfun.

[654] The Mpmath Development Team. *Incomplete Elliptic Integral of the Second Kind*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2013. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/elliptic.html#ellipe.

[655] The Mpmath Development Team. *Incomplete Elliptic Integral of the Third Kind*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2013. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/elliptic.html#ellippi.

[656] The Mpmath Development Team. *Logarithmic integral*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2013. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/expintegrals.html#li.

[657] The Mpmath Development Team. *Polylogarithm*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2013. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/zeta.html#polylog.

[658] The Mpmath Development Team. *Riemann and Hurwitz Zeta Function*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2013. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/zeta.html#zeta.

[659] The Mpmath Development Team. *Shi*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2013. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/expintegrals.html#shi.

[660] The Mpmath Development Team. *Sine Integral*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2013. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/expintegrals.html#si.

[661] The Mpmath Development Team. *Absolute value of a number*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2014. [Online; accessed 22-July-2024]. URL: https://mpmath.org/doc/1.1.0/general.html#fabs.

[662] The Mpmath Development Team. *Addition of numbers*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2014. [Online; accessed 22-July-2024]. URL: https://mpmath.org/doc/1.1.0/general.html#fadd.

[663] The Mpmath Development Team. *Ceiling of a number*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2014. [Online; accessed 22-July-2024]. URL: https://mpmath.org/doc/1.1.0/general.html#ceil.

[664] The Mpmath Development Team. *Complex argument (phase) of a number*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2014. [Online; accessed 22-July-2024]. URL: https://mpmath.org/doc/1.1.0/general.html#arg.

[665] The Mpmath Development Team. *Complex conjugate of a number*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2014. [Online; accessed 22-July-2024]. URL: https://mpmath.org/doc/1.1.0/general.html#conj.

[666] The Mpmath Development Team. *Complex number: conversion from polar coordinates*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2014. [Online; accessed 22-July-2024]. URL: https://mpmath.org/doc/1.1.0/general.html#rect.

[667] The Mpmath Development Team. *Division of numbers*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2014. [Online; accessed 22-July-2024]. URL: https://mpmath.org/doc/1.1.0/general.html#fdiv.

[668] The Mpmath Development Team. *Dot product of numbers*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2014. [Online; accessed 22-July-2024]. URL: https://mpmath.org/doc/1.1.0/general.html#fdot.

[669] The Mpmath Development Team. *Floor of a number*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2014. [Online; accessed 22-July-2024]. URL: https://mpmath.org/doc/1.1.0/general.html#floor.

[670] The Mpmath Development Team. *Imaginary part of a number*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2014. [Online; accessed 22-July-2024]. URL: https://mpmath.org/doc/1.1.0/general.html#im.

[671] The Mpmath Development Team. *Multiplication of numbers*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2014. [Online; accessed 22-July-2024]. URL: https://mpmath.org/doc/1.1.0/general.html#fmul.

[672] The Mpmath Development Team. *Negation of numbers*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2014. [Online; accessed 22-July-2024]. URL: https://mpmath.org/doc/1.1.0/general.html#fneg.

[673] The Mpmath Development Team. *Polar representation of a complex number*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2014. [Online; accessed 22-July-2024]. URL: https://mpmath.org/doc/1.1.0/general.html#polar.

[674] The Mpmath Development Team. *Product of numbers*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2014. [Online; accessed 22-July-2024]. URL: https://mpmath.org/doc/1.1.0/general.html#fprod.

[675] The Mpmath Development Team. *Real part of a number*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2014. [Online; accessed 22-July-2024]. URL: https://mpmath.org/doc/1.1.0/general.html#re.

[676] The Mpmath Development Team. *Sign of a number*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2014. [Online; accessed 22-July-2024]. URL: https://mpmath.org/doc/1.1.0/general.html#sign.

[677] The Mpmath Development Team. *Subtraction of numbers*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2014. [Online; accessed 22-July-2024]. URL: https://mpmath.org/doc/1.1.0/general.html#fsub.

[678] The Mpmath Development Team. *Summation of numbers*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2014. [Online; accessed 22-July-2024]. URL: https://mpmath.org/doc/1.1.0/general.html#fsum.

[679] The Mpmath Development Team. *Chopping off small real or imaginary parts of a number*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2015. [Online; accessed 22-July-2024]. URL: https://mpmath.org/doc/1.1.0/general.html#chop.

[680] The Mpmath Development Team. *Frexp*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2015. [Online; accessed 22-July-2024]. URL: https://mpmath.org/doc/1.1.0/general.html#frexp.

[681] The Mpmath Development Team. *Generation of a list of evenly spaced real numbers*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2015. [Online; accessed 22-July-2024]. URL: https://mpmath.org/doc/1.1.0/general.html#linspace.

[682] The Mpmath Development Team. *Generation of a list of real numbers*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2015. [Online; accessed 22-July-2024]. URL: https://mpmath.org/doc/1.1.0/general.html#arange.

[683] The Mpmath Development Team. *Klein j-invariant*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2015. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/elliptic.html#kleinj.

[684] The Mpmath Development Team. *Ldexp*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2015. [Online; accessed 22-July-2024]. URL: https://mpmath.org/doc/1.1.0/general.html#ldexp.

[685] The Mpmath Development Team. *Random number*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2015. [Online; accessed 22-July-2024]. URL: https://mpmath.org/doc/1.1.0/general.html#rand.

[686] The Mpmath Development Team. *Testing for NaN (not-a-number)*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2015. [Online; accessed 22-July-2024]. URL: https://mpmath.org/doc/1.1.0/general.html#isnan.

[687] The Mpmath Development Team. *Testing if a number is finite*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2015. [Online; accessed 22-July-2024]. URL: https://mpmath.org/doc/1.1.0/general.html#isfinite.

[688] The Mpmath Development Team. *Testing if a number is infinite*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2015. [Online; accessed 22-July-2024]. URL: https://mpmath.org/doc/1.1.0/general.html#isinf.

[689] The Mpmath Development Team. *Testing if a number is integer-valued*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2015. [Online; accessed 22-July-2024]. URL: https://mpmath.org/doc/1.1.0/general.html#isint.

[690] The Mpmath Development Team. *Testing if a number is normal*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2015. [Online; accessed 22-July-2024]. URL: https://mpmath.org/doc/1.1.0/general.html#isnormal.

[691] The Mpmath Development Team. *Testing if numbers are almost equal*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2015. [Online; accessed 22-July-2024]. URL: https://mpmath.org/doc/1.1.0/general.html#almosteq.

[692] The Mpmath Development Team. *Backlund S function*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2016. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/zeta.html#siegeltheta.

[693] The Mpmath Development Team. *Dirichlet eta function (Alternating zeta function)*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2016. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/zeta.html#altzeta.

[694] The Mpmath Development Team. *Generalized Clausen cosine function*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2016. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/zeta.html#clcos.

[695] The Mpmath Development Team. *Generalized Clausen sine function*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2016. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/zeta.html#clsin.

[696] The Mpmath Development Team. *Lerch's transcendent*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2016. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/zeta.html#lerchphi.

[697] The Mpmath Development Team. *Riemann-Siegel Z function*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2016. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/zeta.html#siegelz.

[698] The Mpmath Development Team. *Riemann-Siegel theta function*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2016. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/zeta.html#backlunds.

[699] The Mpmath Development Team. *Zeros of the Riemann zeta function*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2016. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/zeta.html#zetazero.

[700] The Mpmath Development Team. *Degrees*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2017. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/trigonometric.html#degrees.

[701] The Mpmath Development Team. *Exponential function expj*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2017. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/powers.html#expj.

[702] The Mpmath Development Team. *Exponential function expjpi*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2017. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/powers.html#expjpi.

[703] The Mpmath Development Team. *Kelvin function bei*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2017. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/bessel.html#bei.

[704] The Mpmath Development Team. *Kelvin function ber*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2017. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/bessel.html#ber.

[705] The Mpmath Development Team. *Kelvin function kei*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2017. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/bessel.html#kei.

[706] The Mpmath Development Team. *Kelvin function ker*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2017. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/bessel.html#ker.

[707] The Mpmath Development Team. *Radians*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2017. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/trigonometric.html#radians.

[708] The Mpmath Development Team. *Struve function H*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2017. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/bessel.html#struveh.

[709] The Mpmath Development Team. *Struve function L*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2017. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/bessel.html#struvel.

[710] The Mpmath Development Team. *Coulomb wave function F*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2018. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/bessel.html#coulombf.

[711] The Mpmath Development Team. *Coulomb wave function G*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2018. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/bessel.html#coulombg.

[712] The Mpmath Development Team. *Generalized hypergeometric function 1F2*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2018. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/hypergeometric.html#hyp1f2.

[713] The Mpmath Development Team. *Normalizing Gamow constant for Coulomb wave functions*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2018. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/bessel.html#coulombc.

[714] The Mpmath Development Team. *Parabolic cylinder function D*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2018. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/bessel.html#pcfd.

[715] The Mpmath Development Team. *Parabolic cylinder function U*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2018. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/bessel.html#pcfu.

[716] The Mpmath Development Team. *Parabolic cylinder function V*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2018. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/bessel.html#pcfv.

[717] The Mpmath Development Team. *Parabolic cylinder function W*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2018. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/bessel.html#pcfw.

[718] The Mpmath Development Team. *Scorer function Gi*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2018. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/bessel.html#scorergi.

[719] The Mpmath Development Team. *Scorer function Hi*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2018. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/bessel.html#scorerhi.

[720] The Mpmath Development Team. *Whittaker function M*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2018. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/bessel.html#whitm.

[721] The Mpmath Development Team. *Whittaker function W*. mpmath - a Python library for arbitrary-precision floating-point arithmetic, 2018. [Online; accessed 22-July-2024]. URL: https://mpmath.readthedocs.io/en/latest/functions/bessel.html#whitw.

[722] The FLINT Team. *Acb: Bernoulli polynomial (in: Zeta function)*. FLINT: Fast Library for Number Theory, 2019. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/acb.html#zeta-function.

[723] The FLINT Team. *Acb: Error functions and Fresnel integrals*. FLINT: Fast Library for Number Theory, 2019. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/acb_hypgeom.html#error-functions-and-fresnel-integrals.

[724] The FLINT Team. *Acb: Exponentials and logarithms*. FLINT: Fast Library for Number Theory, 2019. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/acb.html#exponentials-and-logarithms.

[725] The FLINT Team. *Acb: Gamma function and factorials*. FLINT: Fast Library for Number Theory, 2019. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/acb.html#gamma-function.

[726] The FLINT Team. *Acb: Hyperbolic functions*. FLINT: Fast Library for Number Theory, 2019. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/acb.html#hyperbolic-functions.

[727] The FLINT Team. *Acb: Incomplete gamma and beta functions*. FLINT: Fast Library for Number Theory, 2019. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/acb_hypgeom.html#incomplete-gamma-and-beta-functions.

[728] The FLINT Team. *Acb: Inverse hyperbolic functions*. FLINT: Fast Library for Number Theory, 2019. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/acb.html#inverse-hyperbolic-functions.

[729] The FLINT Team. *Acb: Inverse trigonometric functions*. FLINT: Fast Library for Number Theory, 2019. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/acb.html#inverse-trigonometric-functions.

[730] The FLINT Team. *Acb: Lambert W function*. FLINT: Fast Library for Number Theory, 2019. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/acb.html#lambert-w-function.

[731] The FLINT Team. *Acb: Powers and roots*. FLINT: Fast Library for Number Theory, 2019. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/acb.html#powers-and-roots.

[732] The FLINT Team. *Acb: Trigonometric functions*. FLINT: Fast Library for Number Theory, 2019. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/acb.html#trigonometric-functions.

[733] The FLINT Team. *Arb: Error functions and Fresnel integrals*. FLINT: Fast Library for Number Theory, 2019. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/arb_hypgeom.html#error-functions-and-fresnel-integrals.

[734] The FLINT Team. *Arb: Exponentials and logarithms*. FLINT: Fast Library for Number Theory, 2019. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/arb.html#exponentials-and-logarithms.

[735] The FLINT Team. *Arb: Gamma function and factorials*. FLINT: Fast Library for Number Theory, 2019. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/arb.html#gamma-function-and-factorials.

[736] The FLINT Team. *Arb: Hyperbolic functions*. FLINT: Fast Library for Number Theory, 2019. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/arb.html#hyperbolic-functions.

[737] The FLINT Team. *Arb: Incomplete gamma and beta functions*. FLINT: Fast Library for Number Theory, 2019. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/arb_hypgeom.html#incomplete-gamma-and-beta-functions.

[738] The FLINT Team. *Arb: Inverse hyperbolic functions*. FLINT: Fast Library for Number Theory, 2019. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/arb.html#inverse-hyperbolic-functions.

[739] The FLINT Team. *Arb: Inverse trigonometric functions*. FLINT: Fast Library for Number Theory, 2019. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/arb.html#inverse-trigonometric-functions.

[740] The FLINT Team. *Arb: Lambert W function*. FLINT: Fast Library for Number Theory, 2019. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/arb.html#lambert-w-function.

[741] The FLINT Team. *Arb: Powers and roots*. FLINT: Fast Library for Number Theory, 2019. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/arb.html#powers-and-roots.

[742] The FLINT Team. *Arb: Trigonometric functions*. FLINT: Fast Library for Number Theory, 2019. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/arb.html#trigonometric-functions.

[743] The FLINT Team. *Acb: Bessel functions*. FLINT: Fast Library for Number Theory, 2020. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/acb_hypgeom.html#bessel-functions.

[744] The FLINT Team. *Acb: Carlson symmetric elliptic integrals*. FLINT: Fast Library for Number Theory, 2020. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/acb_elliptic.html#carlson-symmetric-elliptic-integrals.

[745] The FLINT Team. *Acb: Complete elliptic integrals*. FLINT: Fast Library for Number Theory, 2020. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/acb_elliptic.html#complete-elliptic-integrals.

[746] The FLINT Team. *Acb: Confluent hypergeometric functions*. FLINT: Fast Library for Number Theory, 2020. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/acb_hypgeom.html#confluent-hypergeometric-functions.

[747] The FLINT Team. *Acb: Gauss hypergeometric function*. FLINT: Fast Library for Number Theory, 2020. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/acb_hypgeom.html#gauss-hypergeometric-function.

[748] The FLINT Team. *Acb: Jacobi theta functions*. FLINT: Fast Library for Number Theory, 2020. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/acb_modular.html#jacobi-theta-functions.

[749] The FLINT Team. *Acb: Legendre incomplete elliptic integrals*. FLINT: Fast Library for Number Theory, 2020. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/acb_elliptic.html#legendre-incomplete-elliptic-integrals.

[750] The FLINT Team. *Acb: Modified Bessel functions*. FLINT: Fast Library for Number Theory, 2020. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/acb_hypgeom.html#bessel-functions.

[751] The FLINT Team. *Acb: Orthogonal polynomials and functions*. FLINT: Fast Library for Number Theory, 2020. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/acb_hypgeom.html#orthogonal-polynomials-and-functions.

[752] The FLINT Team. *Arb: Bessel functions*. FLINT: Fast Library for Number Theory, 2020. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/arb_hypgeom.html#bessel-functions.

[753] The FLINT Team. *Arb: Confluent hypergeometric functions*. FLINT: Fast Library for Number Theory, 2020. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/arb_hypgeom.html#confluent-hypergeometric-functions.

[754] The FLINT Team. *Arb: Gauss hypergeometric function*. FLINT: Fast Library for Number Theory, 2020. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/arb_hypgeom.html#gauss-hypergeometric-function.

[755] The FLINT Team. *Arb: Orthogonal polynomials and functions*. FLINT: Fast Library for Number Theory, 2020. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/arb_hypgeom.html#orthogonal-polynomials-and-functions.

[756] The FLINT Team. *Arb: Other special functions: AGM*. FLINT: Fast Library for Number Theory, 2020. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/arb.html#other-special-functions.

[757] The FLINT Team. *Hurwitz zeta function*. FLINT: Fast Library for Number Theory, 2020. [Online; accessed 22-July-2024]. url: https://flintlib.org/doc/arb.html#zeta-function and https://flintlib.org/doc/acb_dirichlet.html#hurwitz-zeta-function.

[758] The FLINT Team. *Riemann zeta function*. FLINT: Fast Library for Number Theory, 2020. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/acb_dirichlet.html#riemann-zeta-function.

[759] The FLINT Team. *Zeta function*. FLINT: Fast Library for Number Theory, 2020. [Online; accessed 22-July-2024]. url: https://flintlib.org/doc/arb.html#zeta-function and https://flintlib.org/doc/acb.html#zeta-function.

[760] The FLINT Team. *Acb: Coulomb wave functions*. FLINT: Fast Library for Number Theory, 2021. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/acb_hypgeom.html#coulomb-wave-functions.

[761] The FLINT Team. *Acb: Dedekind eta function*. FLINT: Fast Library for Number Theory, 2021. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/acb_modular.html#dedekind-eta-function.

[762] The FLINT Team. *Acb: Exponential and trigonometric integrals*. FLINT: Fast Library for Number Theory, 2021. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/acb_hypgeom.html#exponential-and-trigonometric-integrals.

[763] The FLINT Team. *Acb: Hardy Z-functions*. FLINT: Fast Library for Number Theory, 2021. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/acb_dirichlet.html#hardy-z-functions.

[764] The FLINT Team. *Acb: Lerch transcendent*. FLINT: Fast Library for Number Theory, 2021. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/acb_dirichlet.html#lerch-transcendent.

[765] The FLINT Team. *Acb: Modular forms*. FLINT: Fast Library for Number Theory, 2021. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/acb_elliptic.html#weierstrass-elliptic-functions.

[766] The FLINT Team. *Acb: Weierstrass elliptic functions*. FLINT: Fast Library for Number Theory, 2021. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/acb_elliptic.html#weierstrass-elliptic-functions.

[767] The FLINT Team. *Arb: Coulomb wave functions*. FLINT: Fast Library for Number Theory, 2021. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/arb_hypgeom.html#coulomb-wave-functions.

[768] The FLINT Team. *Arb: Exponential and trigonometric integrals*. FLINT: Fast Library for Number Theory, 2021. [Online; accessed 22-July-2024]. URL: https://flintlib.org/doc/arb_hypgeom.html#exponential-and-trigonometric-integrals.

[769] The FLINT Team. *Dilogarithm*. FLINT: Fast Library for Number Theory, 2021. [Online; accessed 22-July-2024]. url: https://flintlib.org/doc/acb_hypgeom.html#dilogarithm and https://flintlib.org/doc/arb_hypgeom.html#dilogarithm.

[770] The FLINT Team. *Polylogarithms*. FLINT: Fast Library for Number Theory, 2021. [Online; accessed 22-July-2024]. url: https://flintlib.org/doc/arb.html#polylogarithms and https://flintlib.org/doc/acb.html#polylogarithms.

[771] N. M. Temme. *Error Functions*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/7.2#i.

[772] N. M. Temme. *Exponential and Logarithmic Integrals*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/6.2.

[773] N. M. Temme. *Fresnel Integrals*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/7.2#iii.

[774] N. M. Temme. *Hyperbolic Analogs of the Sine and Cosine Integrals*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/6.2#E16.

[775] N. M. Temme. *Logarithmic integral*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/6.2#E8.

[776] N. M. Temme. *Parabolic Cylinder Functions*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/12.2.

[777] N. M. Temme. *Sine and Cosine Integrals*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/6.2#E11.

[778] I. J. Thompson. *Coulomb Functions*. NIST Digital Library of Mathematical Functions, 2010. URL: https://dlmf.nist.gov/33.

[779] I.J. Thompson and A.R. Barnett. Coulomb and bessel functions of complex arguments and order. *J. Comp. Phys.*, 1986.

[780] M.L. Tiku. A note on approximating to the non-central f-distribution. *Biometrika*, 53:606–610, 1966.

[781] Y. L. Tong. *The multivariate normal distribution*. Springer-Verlag, 1990.

[782] A. Townsend, T. Trogdon, and S. Olver. Fast computation of gauss quadrature nodes and weights on the whole real line. *IMA Journal of Numerical Analysis*, 36(1):337–358, 2016. Article Stable url: https://doi.org/10.1093/imanum/drv002.

[783] M. J. Tretter and G. W. Walster. Continued fractions for the incomplete beta function: additions and corrections. *Ann. Stat.*, 7(2):462–465, 1979. Available at http://projecteuclid.org/euclid.aos/1176344629.

[784] M. Tsagris, C. Beneki, and H. Hassani. On the folded normal distribution. *Mathematics*, 2(1):12–28, 2014.

[785] M. A. vandeWiel. Exact distributions of distribution-free test statistics. eindhoven: technische universiteit eindhoven. 2000. Available as http://www.mcs.anl.gov/Âămore/ANL8074a.pdf.

[786] C. Walck. *Handbook on Statistical Distributions for experimentalists*. University of Stockholm, Internal Report SUF-PFY/96–01, 2007. Available as http://www.stat.rice.edu/ÂădobelmanÂă/textfiles/DistributionsHandbook.pdf.

[787] G. W. Walster and M. J. Tretter. Exact noncentral distributions of wilks' `\lambda ` and wilks-lawley u criteria as mixtures of incomplete beta functions: for three tests. *Ann. Stat.*, 8(6):1388–1390, 1980. Available at http://projecteuclid.org/euclid.aos/1176345210.

[788] S. Wang. One-step saddlepoint approximations for quantiles. *Computational Statistics & Data Analysis*, 20:65–74, 1995.

[789] S. Wang and H.L. Gray. Approximating tail probabilities of noncentral distributions. *Computational Statistics & Data Analysis*, 15(3):343 – 352, 1993. Available at: http://www.sciencedirect.com/science/article/pii/016794739390261Q. URL: http://www.sciencedirect.com/science/article/pii/016794739390261Q, doi:http://dx.doi.org/10.1016/0167-9473(93)90261-Q.

[790] E. Wegert. *Visual Complex Functions - An Introduction with Phase Portraits*. Birkhäuser Basel, 2012.

[791] E. W. Weisstein. *Beta Distribution*. From MathWorld - A Wolfram Web Resource, 2004. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/BetaDistribution.html.

[792] E. W. Weisstein. *Chi-Squared Distribution*. From MathWorld - A Wolfram Web Resource, 2004. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/Chi-SquaredDistribution.html.

[793] E. W. Weisstein. *Correlation Coefficient–Bivariate Normal Distribution*. From MathWorld - A Wolfram Web Resource, 2004. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/CorrelationCoefficientBivariateNormalDistribution.html.

[794] E. W. Weisstein. *Cubic Formula*. From MathWorld - A Wolfram Web Resource, 2004. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/CubicFormula.html.

[795] E. W. Weisstein. *F-Distribution*. From MathWorld - A Wolfram Web Resource, 2004. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/F-Distribution.html.

[796] E. W. Weisstein. *Filon's Integration Formula*. From MathWorld - A Wolfram Web Resource, 2004. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/FilonsIntegrationFormula.html.

[797] E. W. Weisstein. *Gaussian Quadrature*. From MathWorld - A Wolfram Web Resource, 2004. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/GaussianQuadrature.html.

[798] E. W. Weisstein. *Halley's Method*. From MathWorld - A Wolfram Web Resource, 2004. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/HalleysMethod.html.

[799] E. W. Weisstein. *Hermite-Gauss Quadrature*. From MathWorld - A Wolfram Web Resource, 2004. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/Hermite-GaussQuadrature.html.

[800] E. W. Weisstein. *Jacobi-Gauss Quadrature*. From MathWorld - A Wolfram Web Resource, 2004. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/Jacobi-GaussQuadrature.html.

[801] E. W. Weisstein. *Laguerre-Gauss Quadrature*. From MathWorld - A Wolfram Web Resource, 2004. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/Laguerre-GaussQuadrature.html.

[802] E. W. Weisstein. *Legendre-Gauss Quadrature*. From MathWorld - A Wolfram Web Resource, 2004. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/Legendre-GaussQuadrature.html.

[803] E. W. Weisstein. *Newton's Method*. From MathWorld - A Wolfram Web Resource, 2004. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/NewtonsMethod.html.

[804] E. W. Weisstein. *Noncentral Chi-Squared Distribution*. From MathWorld - A Wolfram Web Resource, 2004. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/NoncentralChi-SquaredDistribution.html.

[805] E. W. Weisstein. *Noncentral F-Distribution*. From MathWorld - A Wolfram Web Resource, 2004. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/NoncentralF-Distribution.html.

[806] E. W. Weisstein. *Noncentral Student's t-Distribution*. From MathWorld - A Wolfram Web Resource, 2004. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/NoncentralStudentst-Distribution.html.

[807] E. W. Weisstein. *Quadratic Equation.* From MathWorld - A Wolfram Web Resource, 2004. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/QuadraticEquation.html.

[808] E. W. Weisstein. *Schröder's Method*. From MathWorld - A Wolfram Web Resource, 2004. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/SchroedersMethod.html.

[809] E. W. Weisstein. *Student's t-Distribution*. From MathWorld - A Wolfram Web Resource, 2004. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/Studentst-Distribution.html.

[810] E. W. Weisstein. *Wynn's Epsilon Method*. From MathWorld - A Wolfram Web Resource, 2004. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/WynnsEpsilonMethod.html.

[811] E. W. Weisstein. *Bernoulli Distribution*. From MathWorld - A Wolfram Web Resource, 2005. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/BernoulliDistribution.html.

[812] E. W. Weisstein. *Binomial Distribution*. From MathWorld - A Wolfram Web Resource, 2005. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/BinomialDistribution.html.

[813] E. W. Weisstein. *Cauchy Distribution*. From MathWorld - A Wolfram Web Resource, 2005. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/CauchyDistribution.html.

[814] E. W. Weisstein. *Chi Distribution*. From MathWorld - A Wolfram Web Resource, 2005. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/ChiDistribution.html.

[815] E. W. Weisstein. *Exponential Distribution*. From MathWorld - A Wolfram Web Resource, 2005. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/ExponentialDistribution.html.

[816] E. W. Weisstein. *Gamma Distribution*. From MathWorld - A Wolfram Web Resource, 2005. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/GammaDistribution.html.

[817] E. W. Weisstein. *Geometric Distribution*. From MathWorld - A Wolfram Web Resource, 2005. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/GeometricDistribution.html.

[818] E. W. Weisstein. *Gumbel Distribution*. From MathWorld - A Wolfram Web Resource, 2005. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/GumbelDistribution.html.

[819] E. W. Weisstein. *Half-Normal distribution*. From MathWorld - A Wolfram Web Resource, 2005. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/Half-NormalDistribution.html.

[820] E. W. Weisstein. *Hypergeometric Distribution*. From MathWorld - A Wolfram Web Resource, 2005. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/HypergeometricDistribution.html.

[821] E. W. Weisstein. *Inverse Gaussian (or Wald) Distribution*. From MathWorld - A Wolfram Web Resource, 2005. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/InverseGaussianDistribution.html.

[822] E. W. Weisstein. *Laplace Distribution*. From MathWorld - A Wolfram Web Resource, 2005. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/LaplaceDistribution.html.

[823] E. W. Weisstein. *Log Normal Distribution*. From MathWorld - A Wolfram Web Resource, 2005. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/LogNormalDistribution.html.

[824] E. W. Weisstein. *Log-Series Distribution*. From MathWorld - A Wolfram Web Resource, 2005. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/Log-SeriesDistribution.html.

[825] E. W. Weisstein. *Logistic Distribution*. From MathWorld - A Wolfram Web Resource, 2005. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/LogisticDistribution.html.

[826] E. W. Weisstein. *Lévy Distribution*. From MathWorld - A Wolfram Web Resource, 2005. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/LevyDistribution.html.

[827] E. W. Weisstein. *Maxwell Distribution*. From MathWorld - A Wolfram Web Resource, 2005. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/MaxwellDistribution.html.

[828] E. W. Weisstein. *Negative Binomial Distribution*. From MathWorld - A Wolfram Web Resource, 2005. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/NegativeBinomialDistribution.html.

[829] E. W. Weisstein. *Normal Distribution*. From MathWorld - A Wolfram Web Resource, 2005. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/NormalDistribution.html.

[830] E. W. Weisstein. *Pareto Distribution*. From MathWorld - A Wolfram Web Resource, 2005. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/ParetoDistribution.html.

[831] E. W. Weisstein. *Poisson Distribution*. From MathWorld - A Wolfram Web Resource, 2005. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/PoissonDistribution.html.

[832] E. W. Weisstein. *Rayleigh Distribution*. From MathWorld - A Wolfram Web Resource, 2005. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/RayleighDistribution.html.

[833] E. W. Weisstein. *Triangular Distribution*. From MathWorld - A Wolfram Web Resource, 2005. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/TriangularDistribution.html.

[834] E. W. Weisstein. *Uniform Distribution*. From MathWorld - A Wolfram Web Resource, 2005. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/UniformDistribution.html.

[835] E. W. Weisstein. *Weibull Distribution*. From MathWorld - A Wolfram Web Resource, 2005. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/WeibullDistribution.html.

[836] E. W. Weisstein. *Binary Logarithm*. From MathWorld - A Wolfram Web Resource, 2006. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/BinaryLogarithm.html.

[837] E. W. Weisstein. *Common Logarithm*. From MathWorld - A Wolfram Web Resource, 2006. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/CommonLogarithm.html.

[838] E. W. Weisstein. *Cube Root*. From MathWorld - A Wolfram Web Resource, 2006. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/CubeRoot.html.

[839] E. W. Weisstein. *Erf*. From MathWorld - A Wolfram Web Resource, 2006. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/Erf.html.

[840] E. W. Weisstein. *Erfc*. From MathWorld - A Wolfram Web Resource, 2006. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/Erfc.html.

[841] E. W. Weisstein. *Erfi*. From MathWorld - A Wolfram Web Resource, 2006. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/Erfi.html.

[842] E. W. Weisstein. *Exponential Function*. From MathWorld - A Wolfram Web Resource, 2006. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/ExponentialFunction.html.

[843] E. W. Weisstein. *Incomplete Beta Function*. From MathWorld - A Wolfram Web Resource, 2006. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/IncompleteBetaFunction.html.

[844] E. W. Weisstein. *Incomplete Gamma Function*. From MathWorld - A Wolfram Web Resource, 2006. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/IncompleteGammaFunction.html.

[845] E. W. Weisstein. *Inverse Erf*. From MathWorld - A Wolfram Web Resource, 2006. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/InverseErf.html.

[846] E. W. Weisstein. *Inverse Erfc*. From MathWorld - A Wolfram Web Resource, 2006. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/InverseErfc.html.

[847] E. W. Weisstein. *Logarithm*. From MathWorld - A Wolfram Web Resource, 2006. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/Logarithm.html.

[848] E. W. Weisstein. *Natural Logarithm*. From MathWorld - A Wolfram Web Resource, 2006. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/NaturalLogarithm.html.

[849] E. W. Weisstein. *Power*. From MathWorld - A Wolfram Web Resource, 2006. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/Power.html.

[850] E. W. Weisstein. *Regularized Incomplete Beta Function*. From MathWorld - A Wolfram Web Resource, 2006. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/RegularizedBetaFunction.html.

[851] E. W. Weisstein. *Regularized Incomplete Gamma Function*. From MathWorld - A Wolfram Web Resource, 2006. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/RegularizedGammaFunction.html.

[852] E. W. Weisstein. *Square*. From MathWorld - A Wolfram Web Resource, 2006. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/Square.html.

[853] E. W. Weisstein. *Square Root*. From MathWorld - A Wolfram Web Resource, 2006. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/SquareRoot.html.

[854] E. W. Weisstein. *Cosecant*. From MathWorld - A Wolfram Web Resource, 2007. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/Cosecant.html.

[855] E. W. Weisstein. *Cosine*. From MathWorld - A Wolfram Web Resource, 2007. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/Cosine.html.

[856] E. W. Weisstein. *Cotangent*. From MathWorld - A Wolfram Web Resource, 2007. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/Cotangent.html.

[857] E. W. Weisstein. *Hyperbolic Cosecant*. From MathWorld - A Wolfram Web Resource, 2007. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/HyperbolicCosecant.html.

[858] E. W. Weisstein. *Hyperbolic Cosine*. From MathWorld - A Wolfram Web Resource, 2007. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/HyperbolicCosine.html.

[859] E. W. Weisstein. *Hyperbolic Cotangent*. From MathWorld - A Wolfram Web Resource, 2007. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/HyperbolicCotangent.html.

[860] E. W. Weisstein. *Hyperbolic Secant*. From MathWorld - A Wolfram Web Resource, 2007. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/HyperbolicSecant.html.

[861] E. W. Weisstein. *Hyperbolic Sine*. From MathWorld - A Wolfram Web Resource, 2007. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/HyperbolicSine.html.

[862] E. W. Weisstein. *Hyperbolic Tangent*. From MathWorld - A Wolfram Web Resource, 2007. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/HyperbolicTangent.html.

[863] E. W. Weisstein. *Inverse Cosecant*. From MathWorld - A Wolfram Web Resource, 2007. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/InverseCosecant.html.

[864] E. W. Weisstein. *Inverse Cosine*. From MathWorld - A Wolfram Web Resource, 2007. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/InverseCosine.html.

[865] E. W. Weisstein. *Inverse Cotangent*. From MathWorld - A Wolfram Web Resource, 2007. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/InverseCotangent.html.

[866] E. W. Weisstein. *Inverse Secant*. From MathWorld - A Wolfram Web Resource, 2007. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/InverseSecant.html.

[867] E. W. Weisstein. *Inverse Sine*. From MathWorld - A Wolfram Web Resource, 2007. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/InverseSine.html.

[868] E. W. Weisstein. *Inverse Tangent*. From MathWorld - A Wolfram Web Resource, 2007. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/InverseTangent.html.

[869] E. W. Weisstein. *Secant*. From MathWorld - A Wolfram Web Resource, 2007. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/Secant.html.

[870] E. W. Weisstein. *Sine*. From MathWorld - A Wolfram Web Resource, 2007. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/Sine.html.

[871] E. W. Weisstein. *Tangent*. From MathWorld - A Wolfram Web Resource, 2007. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/Tangent.html.

[872] E. W. Weisstein. *Bernoulli Number*. From MathWorld - A Wolfram Web Resource, 2008. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/BernoulliNumber.html.

[873] E. W. Weisstein. *Bernoulli Polynomial*. From MathWorld - A Wolfram Web Resource, 2008. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/BernoulliPolynomial.html.

[874] E. W. Weisstein. *Bessel Function of the First Kind.* From MathWorld - A Wolfram Web Resource, 2008. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/BesselFunctionoftheFirstKind.html.

[875] E. W. Weisstein. *Bessel Function of the Second Kind.* From MathWorld - A Wolfram Web Resource, 2008. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/BesselFunctionoftheSecondKind.html.

[876] E. W. Weisstein. *Beta Function*. From MathWorld - A Wolfram Web Resource, 2008. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/BetaFunction.html.

[877] E. W. Weisstein. *Binomial coefficient*. From MathWorld - A Wolfram Web Resource, 2008. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/BinomialCoefficient.html.

[878] E. W. Weisstein. *Factorial*. From MathWorld - A Wolfram Web Resource, 2008. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/Factorial.html.

[879] E. W. Weisstein. *Falling factorial*. From MathWorld - A Wolfram Web Resource, 2008. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/FallingFactorial.html.

[880] E. W. Weisstein. *Gamma Function*. From MathWorld - A Wolfram Web Resource, 2008. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/GammaFunction.html.

[881] E. W. Weisstein. *Inverse Hyperbolic Cosecant*. From MathWorld - A Wolfram Web Resource, 2008. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/InverseHyperbolicCosecant.html.

[882] E. W. Weisstein. *Inverse Hyperbolic Cosine*. From MathWorld - A Wolfram Web Resource, 2008. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/InverseHyperbolicCosine.html.

[883] E. W. Weisstein. *Inverse Hyperbolic Cotangent*. From MathWorld - A Wolfram Web Resource, 2008. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/InverseHyperbolicCotangent.html.

[884] E. W. Weisstein. *Inverse Hyperbolic Secant*. From MathWorld - A Wolfram Web Resource, 2008. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/InverseHyperbolicSecant.html.

[885] E. W. Weisstein. *Inverse Hyperbolic Sine*. From MathWorld - A Wolfram Web Resource, 2008. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/InverseHyperbolicSine.html.

[886] E. W. Weisstein. *Inverse Hyperbolic Tangent*. From MathWorld - A Wolfram Web Resource, 2008. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/InverseHyperbolicTangent.html.

[887] E. W. Weisstein. *Lambert W-Function*. From MathWorld - A Wolfram Web Resource, 2008. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/LambertW-Function.html.

[888] E. W. Weisstein. *LogGamma Function*. From MathWorld - A Wolfram Web Resource, 2008. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/LogGammaFunction.html.

[889] E. W. Weisstein. *Polygamma Function*. From MathWorld - A Wolfram Web Resource, 2008. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/PolygammaFunction.html.

[890] E. W. Weisstein. *Reciprocal Gamma Function*. From MathWorld - A Wolfram Web Resource, 2008. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/GammaFunction.html.

[891] E. W. Weisstein. *Rising factorial (Pochhammer's Symbol)*. From MathWorld - A Wolfram Web Resource, 2008. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/RisingFactorial.html.

[892] E. W. Weisstein. *(Gauss) Hypergeometric Function*. From MathWorld - A Wolfram Web Resource, 2009. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/HypergeometricFunction.html.

[893] E. W. Weisstein. *Apéry's Constant*. From MathWorld - A Wolfram Web Resource, 2009. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/AperysConstant.html.

[894] E. W. Weisstein. *Catalan's Constant*. From MathWorld - A Wolfram Web Resource, 2009. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/CatalansConstant.html.

[895] E. W. Weisstein. *Confluent Hypergeometric Function of the First Kind*. From MathWorld - A Wolfram Web Resource, 2009. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/ConfluentHypergeometricFunctionoftheFirstKind.html.

[896] E. W. Weisstein. *Confluent Hypergeometric Function of the Second Kind*. From MathWorld - A Wolfram Web Resource, 2009. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/ConfluentHypergeometricFunctionoftheSecondKind.html.

[897] E. W. Weisstein. *Confluent Hypergeometric Limit Function*. From MathWorld - A Wolfram Web Resource, 2009. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/ConfluentHypergeometricLimitFunction.html.

[898] E. W. Weisstein. *Degree/Radian*. From MathWorld - A Wolfram Web Resource, 2009. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/Radian.html.

[899] E. W. Weisstein. *Euler-Mascheroni Constant*. From MathWorld - A Wolfram Web Resource, 2009. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/Euler-MascheroniConstant.html.

[900] E. W. Weisstein. *Glaisher-Kinkelin Constant*. From MathWorld - A Wolfram Web Resource, 2009. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/Glaisher-KinkelinConstant.html.

[901] E. W. Weisstein. *Golden Ratio*. From MathWorld - A Wolfram Web Resource, 2009. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/GoldenRatio.html.

[902] E. W. Weisstein. *Khinchin's Constant*. From MathWorld - A Wolfram Web Resource, 2009. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/KhinchinsConstant.html.

[903] E. W. Weisstein. *Modified Bessel Function of the First Kind*. From MathWorld - A Wolfram Web Resource, 2009. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/ModifiedBesselFunctionoftheFirstKind.html.

[904] E. W. Weisstein. *Modified Bessel Function of the Second Kind*. From MathWorld - A Wolfram Web Resource, 2009. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/ModifiedBesselFunctionoftheSecondKind.html.

[905] E. W. Weisstein. *Natural Logarithm of 10*. From MathWorld - A Wolfram Web Resource, 2009. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/NaturalLogarithmof10.html.

[906] E. W. Weisstein. *Natural Logarithm of 2*. From MathWorld - A Wolfram Web Resource, 2009. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/NaturalLogarithmof2.html.

[907] E. W. Weisstein. *Pi*. From MathWorld - A Wolfram Web Resource, 2009. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/Pi.html.

[908] E. W. Weisstein. *e*. From MathWorld - A Wolfram Web Resource, 2009. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/e.html.

[909] E. W. Weisstein. *Arithmetic-Geometric Mean*. From MathWorld - A Wolfram Web Resource, 2010. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/Arithmetic-GeometricMean.html.

[910] E. W. Weisstein. *Barnes G-function*. From MathWorld - A Wolfram Web Resource, 2010. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/BarnesG-Function.html.

[911] E. W. Weisstein. *Chebyshev Polynomial of the First Kind*. From MathWorld - A Wolfram Web Resource, 2010. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/ChebyshevPolynomialoftheFirstKind.html.

[912] E. W. Weisstein. *Chebyshev Polynomial of the Second Kind*. From MathWorld - A Wolfram Web Resource, 2010. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/ChebyshevPolynomialoftheFirstKind.html.

[913] E. W. Weisstein. *Digamma Function*. From MathWorld - A Wolfram Web Resource, 2010. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/DigammaFunction.html.

[914] E. W. Weisstein. *DoubleFactorial*. From MathWorld - A Wolfram Web Resource, 2010. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/DoubleFactorial.html.

[915] E. W. Weisstein. *Euler Number*. From MathWorld - A Wolfram Web Resource, 2010. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/EulerNumber.html.

[916] E. W. Weisstein. *Euler Polynomial*. From MathWorld - A Wolfram Web Resource, 2010. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/EulerPolynomial.html.

[917] E. W. Weisstein. *Gegenbauer Polynomial*. From MathWorld - A Wolfram Web Resource, 2010. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/GegenbauerPolynomial.html.

[918] E. W. Weisstein. *Generalized Harmonic Numbers*. From MathWorld - A Wolfram Web Resource, 2010. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/HarmonicNumber.html.

[919] E. W. Weisstein. *Harmonic Numbers*. From MathWorld - A Wolfram Web Resource, 2010. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/HarmonicNumber.html.

[920] E. W. Weisstein. *Hermite Polynomial*. From MathWorld - A Wolfram Web Resource, 2010. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/HermitePolynomial.html.

[921] E. W. Weisstein. *Hyperfactorial*. From MathWorld - A Wolfram Web Resource, 2010. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/Hyperfactorial.html.

[922] E. W. Weisstein. *Jacobi Polynomial*. From MathWorld - A Wolfram Web Resource, 2010. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/JacobiPolynomial.html.

[923] E. W. Weisstein. *Laguerre Polynomial*. From MathWorld - A Wolfram Web Resource, 2010. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/LaguerrePolynomial.html.

[924] E. W. Weisstein. *Legendre Function of the Second Kind Q*. From MathWorld - A Wolfram Web Resource, 2010. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/LegendreFunctionoftheSecondKind.html.

[925] E. W. Weisstein. *Legendre Polynomial P*. From MathWorld - A Wolfram Web Resource, 2010. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/LegendrePolynomial.html.

[926] E. W. Weisstein. *Logarithm of the Barnes G-function*. From MathWorld - A Wolfram Web Resource, 2010. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/BarnesG-Function.html.

[927] E. W. Weisstein. *Prime Counting Function*. From MathWorld - A Wolfram Web Resource, 2010. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/PrimeCountingFunction.html.

[928] E. W. Weisstein. *Riemann Prime Counting Function*. From MathWorld - A Wolfram Web Resource, 2010. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/RiemannPrimeCountingFunction.html.

[929] E. W. Weisstein. *Sinc Function*. From MathWorld - A Wolfram Web Resource, 2010. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/SincFunction.html.

[930] E. W. Weisstein. *Spherical Harmonic*. From MathWorld - A Wolfram Web Resource, 2010. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/SphericalHarmonic.html.

[931] E. W. Weisstein. *Superfactorial*. From MathWorld - A Wolfram Web Resource, 2010. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/Superfactorial.html.

[932] E. W. Weisstein. *Trigamma Function*. From MathWorld - A Wolfram Web Resource, 2010. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/TrigammaFunction.html.

[933] E. W. Weisstein. *nth Root*. From MathWorld - A Wolfram Web Resource, 2010. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/nthRoot.html.

[934] E. W. Weisstein. *Airy Functions*. From MathWorld - A Wolfram Web Resource, 2011. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/AiryFunctions.html.

[935] E. W. Weisstein. *Hankel Function of the First Kind*. From MathWorld - A Wolfram Web Resource, 2011. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/HankelFunctionoftheFirstKind.html.

[936] E. W. Weisstein. *Hankel Function of the Second Kind*. From MathWorld - A Wolfram Web Resource, 2011. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/HankelFunctionoftheSecondKind.html.

[937] E. W. Weisstein. *Modified Spherical Bessel Function of the First Kind*. From MathWorld - A Wolfram Web Resource, 2011. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/ModifiedSphericalBesselFunctionoftheFirstKind.html.

[938] E. W. Weisstein. *Modified Spherical Bessel Function of the Second Kind*. From MathWorld - A Wolfram Web Resource, 2011. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/ModifiedSphericalBesselFunctionoftheSecondKind.html.

[939] E. W. Weisstein. *Spherical Bessel Function of the First Kind*. From MathWorld - A Wolfram Web Resource, 2011. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/SphericalBesselFunctionoftheFirstKind.html.

[940] E. W. Weisstein. *Spherical Bessel Function of the Second Kind*. From MathWorld - A Wolfram Web Resource, 2011. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/SphericalBesselFunctionoftheSecondKind.html.

[941] E. W. Weisstein. *Spherical Hankel Function of the First Kind*. From MathWorld - A Wolfram Web Resource, 2011. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/SphericalHankelFunctionoftheFirstKind.html.

[942] E. W. Weisstein. *Zeros of the Airy function Ai*. From MathWorld - A Wolfram Web Resource, 2011. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/AiryFunctionZeros.html.

[943] E. W. Weisstein. *Zeros of the Airy function Bi*. From MathWorld - A Wolfram Web Resource, 2011. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/AiryFunctionZeros.html.

[944] E. W. Weisstein. *Zeros of the Bessel function of the first kind*. From MathWorld - A Wolfram Web Resource, 2011. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/BesselFunctionZeros.html.

[945] E. W. Weisstein. *Zeros of the Bessel function of the second kind*. From MathWorld - A Wolfram Web Resource, 2011. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/BesselFunctionZeros.html.

[946] E. W. Weisstein. *Bose-Einstein Distribution*. From MathWorld - A Wolfram Web Resource, 2012. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/Bose-EinsteinDistribution.html.

[947] E. W. Weisstein. *Complete Elliptic Integral of the First Kind*. From MathWorld - A Wolfram Web Resource, 2012. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/CompleteEllipticIntegraloftheFirstKind.html.

[948] E. W. Weisstein. *Complete Elliptic Integral of the Second Kind*. From MathWorld - A Wolfram Web Resource, 2012. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/CompleteEllipticIntegraloftheSecondKind.html.

[949] E. W. Weisstein. *Complete Elliptic Integral of the Third Kind*. From MathWorld - A Wolfram Web Resource, 2012. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/EllipticIntegraloftheThirdKind.html.

[950] E. W. Weisstein. *Dilogarithm*. From MathWorld - A Wolfram Web Resource, 2012. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/Dilogarithm.html.

[951] E. W. Weisstein. *Elliptic Function*. From MathWorld - A Wolfram Web Resource, 2012. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/EllipticFunction.html.

[952] E. W. Weisstein. *Fermi-Dirac Distribution*. From MathWorld - A Wolfram Web Resource, 2012. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/Fermi-DiracDistribution.html.

[953] E. W. Weisstein. *Heuman Lambda Function*. From MathWorld - A Wolfram Web Resource, 2012. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/JacobiZetaFunction.html.

[954] E. W. Weisstein. *Hurwitz Zeta Function*. From MathWorld - A Wolfram Web Resource, 2012. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/RiemannZetaFunction.html.

[955] E. W. Weisstein. *Incomplete Elliptic Integral of the First Kind*. From MathWorld - A Wolfram Web Resource, 2012. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/EllipticIntegraloftheFirstKind.html.

[956] E. W. Weisstein. *Incomplete Elliptic Integral of the Second Kind*. From MathWorld - A Wolfram Web Resource, 2012. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/EllipticIntegraloftheSecondKind.html.

[957] E. W. Weisstein. *Incomplete Elliptic Integral of the Third Kind*. From MathWorld - A Wolfram Web Resource, 2012. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/EllipticIntegraloftheThirdKind.html.

[958] E. W. Weisstein. *Inverse tangent integral*. From MathWorld - A Wolfram Web Resource, 2012. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/InverseTangentIntegral.html.

[959] E. W. Weisstein. *Jacobi Elliptic Functions*. From MathWorld - A Wolfram Web Resource, 2012. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/JacobiEllipticFunctions.html.

[960] E. W. Weisstein. *Jacobi Theta Functions*. From MathWorld - A Wolfram Web Resource, 2012. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/JacobiThetaFunctions.html.

[961] E. W. Weisstein. *Jacobi Zeta Function*. From MathWorld - A Wolfram Web Resource, 2012. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/JacobiZetaFunction.html.

[962] E. W. Weisstein. *Legendre's chi function*. From MathWorld - A Wolfram Web Resource, 2012. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/LegendresChi-Function.html.

[963] E. W. Weisstein. *Lemniscate Function*. From MathWorld - A Wolfram Web Resource, 2012. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/LemniscateFunction.html.

[964] E. W. Weisstein. *Polylogarithm*. From MathWorld - A Wolfram Web Resource, 2012. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/Polylogarithm.html.

[965] E. W. Weisstein. *Riemann Zeta Function*. From MathWorld - A Wolfram Web Resource, 2012. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/RiemannZetaFunction.html.

[966] E. W. Weisstein. *Catalan Number*. From MathWorld - A Wolfram Web Resource, 2013. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/CatalanNumber.html.

[967] E. W. Weisstein. *Cosine Integral*. From MathWorld - A Wolfram Web Resource, 2013. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/CosineIntegral.html.

[968] E. W. Weisstein. *Dawson's Integral*. From MathWorld - A Wolfram Web Resource, 2013. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/DawsonsIntegral.html.

[969] E. W. Weisstein. *Dedekind Eta Function*. From MathWorld - A Wolfram Web Resource, 2013. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/DedekindEtaFunction.html.

[970] E. W. Weisstein. *Dirichlet Beta Function*. From MathWorld - A Wolfram Web Resource, 2013. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/DirichletBetaFunction.html.

[971] E. W. Weisstein. *Elliptic Lambda Function*. From MathWorld - A Wolfram Web Resource, 2013. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/EllipticLambdaFunction.html.

[972] E. W. Weisstein. *Erfc Differential Equation*. From MathWorld - A Wolfram Web Resource, 2013. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/ErfcDifferentialEquation.html.

[973] E. W. Weisstein. *Exponential Integral Ei*. From MathWorld - A Wolfram Web Resource, 2013. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/ExponentialIntegral.html.

[974] E. W. Weisstein. *Exponential Integral En*. From MathWorld - A Wolfram Web Resource, 2013. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/En-Function.html.

[975] E. W. Weisstein. *Fresnel Integral C*. From MathWorld - A Wolfram Web Resource, 2013. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/FresnelIntegrals.html.WolframLanguageDocumentation:https://reference.wolfram.com/language/ref/FresnelC.html.

[976] E. W. Weisstein. *Fresnel Integral S*. From MathWorld - A Wolfram Web Resource, 2013. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/FresnelIntegrals.html.WolframLanguageDocumentation:https://reference.wolfram.com/language/ref/FresnelS.html.

[977] E. W. Weisstein. *Gudermannian function*. From MathWorld - A Wolfram Web Resource, 2013. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/Gudermannian.html.

[978] E. W. Weisstein. *Haversine*. From MathWorld - A Wolfram Web Resource, 2013. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/Haversine.html.

[979] E. W. Weisstein. *Hyperbolic Cosine Integral*. From MathWorld - A Wolfram Web Resource, 2013. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/Chi.html.

[980] E. W. Weisstein. *Hyperbolic Sine Integral*. From MathWorld - A Wolfram Web Resource, 2013. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/Shi.html.

[981] E. W. Weisstein. *Inverse Gudermannian function*. From MathWorld - A Wolfram Web Resource, 2013. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/InverseGudermannian.html.

[982] E. W. Weisstein. *Inverse Haversine*. From MathWorld - A Wolfram Web Resource, 2013. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/InverseHaversine.html.

[983] E. W. Weisstein. *Inverse of Weierstrass Elliptic Function*. From MathWorld - A Wolfram Web Resource, 2013. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/WeierstrassEllipticFunction.html.

[984] E. W. Weisstein. *Logarithmic integral*. From MathWorld - A Wolfram Web Resource, 2013. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/LogarithmicIntegral.html.

[985] E. W. Weisstein. *Modular Discriminant*. From MathWorld - A Wolfram Web Resource, 2013. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/ModularDiscriminant.html.

[986] E. W. Weisstein. *Sine Integral*. From MathWorld - A Wolfram Web Resource, 2013. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/SineIntegral.html.

[987] E. W. Weisstein. *Weierstrass Elliptic Function*. From MathWorld - A Wolfram Web Resource, 2013. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/WeierstrassEllipticFunction.html.

[988] E. W. Weisstein. *Weierstrass Elliptic Function, First derivative*. From MathWorld - A Wolfram Web Resource, 2013. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/WeierstrassEllipticFunction.html.

[989] E. W. Weisstein. *Weierstrass Sigma*. From MathWorld - A Wolfram Web Resource, 2013. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/WeierstrassSigmaFunction.html.

[990] E. W. Weisstein. *Weierstrass Zeta Function*. From MathWorld - A Wolfram Web Resource, 2013. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/WeierstrassZetaFunction.html.

[991] E. W. Weisstein. *Debye Functions*. From MathWorld - A Wolfram Web Resource, 2014. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/DebyeFunctions.html.

[992] E. W. Weisstein. *Dirichlet Eta Function*. From MathWorld - A Wolfram Web Resource, 2014. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/DirichletEtaFunction.html.

[993] E. W. Weisstein. *Dirichlet Lambda function*. From MathWorld - A Wolfram Web Resource, 2014. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/DirichletLambdaFunction.html.

[994] E. W. Weisstein. *Elliptic Modulus k*. From MathWorld - A Wolfram Web Resource, 2014. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/EllipticModulus.html.

[995] E. W. Weisstein. *Elliptic Nome q*. From MathWorld - A Wolfram Web Resource, 2014. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/Nome.html.

[996] E. W. Weisstein. *Elliptic parameter m*. From MathWorld - A Wolfram Web Resource, 2014. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/Parameter.html.

[997] E. W. Weisstein. *Fibonacci Number*. From MathWorld - A Wolfram Web Resource, 2014. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/FibonacciNumber.html.

[998] E. W. Weisstein. *Fibonacci Polynomials*. From MathWorld - A Wolfram Web Resource, 2014. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Fibonacci_polynomials.

[999] E. W. Weisstein. *Half-Period Ratio tau*. From MathWorld - A Wolfram Web Resource, 2014. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/Half-PeriodRatio.html.

[1000] E. W. Weisstein. *Jacobi Amplitude*. From MathWorld - A Wolfram Web Resource, 2014. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/JacobiAmplitude.html.

[1001] E. W. Weisstein. *Klein's Absolute Invariant*. From MathWorld - A Wolfram Web Resource, 2014. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/KleinsAbsoluteInvariant.html.

[1002] E. W. Weisstein. *Lerch Transcendent*. From MathWorld - A Wolfram Web Resource, 2014. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/LerchTranscendent.html.

[1003] E. W. Weisstein. *Logistic_function (Sigmoid Function)*. From MathWorld - A Wolfram Web Resource, 2014. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/SigmoidFunction.html.

[1004] E. W. Weisstein. *Logit Transformation*. From MathWorld - A Wolfram Web Resource, 2014. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/LogitTransformation.html.

[1005] E. W. Weisstein. *Lucas Number*. From MathWorld - A Wolfram Web Resource, 2014. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/LucasNumber.html.

[1006] E. W. Weisstein. *Lucas Polynomials*. From MathWorld - A Wolfram Web Resource, 2014. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/LucasPolynomial.html.

[1007] E. W. Weisstein. *Marcum Q function*. From MathWorld - A Wolfram Web Resource, 2014. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/MarcumQ-Function.html.

[1008] E. W. Weisstein. *Owen's T function*. From MathWorld - A Wolfram Web Resource, 2014. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/OwenT-Function.html.

[1009] E. W. Weisstein. *Riemann Xi*. From MathWorld - A Wolfram Web Resource, 2014. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/Xi-Function.html.

[1010] E. W. Weisstein. *Riemann Zeta Function Zeros*. From MathWorld - A Wolfram Web Resource, 2014. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/RiemannZetaFunctionZeros.html.

[1011] E. W. Weisstein. *Riemann-Siegel Function Theta*. From MathWorld - A Wolfram Web Resource, 2014. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/Riemann-SiegelFunctions.html.WolframLanguageDocumentation:https://reference.wolfram.com/language/ref/RiemannSiegelTheta.html.

[1012] E. W. Weisstein. *Riemann-Siegel Function Z*. From MathWorld - A Wolfram Web Resource, 2014. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/Riemann-SiegelFunctions.html.WolframLanguageDocumentation:https://reference.wolfram.com/language/ref/RiemannSiegelZ.html.

[1013] E. W. Weisstein. *Anger Function J*. From MathWorld - A Wolfram Web Resource, 2015. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/AngerFunction.html.

[1014] E. W. Weisstein. *Cis*. From MathWorld - A Wolfram Web Resource, 2015. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/Cis.html.

[1015] E. W. Weisstein. *Clausen Function*. From MathWorld - A Wolfram Web Resource, 2015. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/ClausenFunction.html.

[1016] E. W. Weisstein. *Kelvin Function Bei*. From MathWorld - A Wolfram Web Resource, 2015. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/Bei.html.

[1017] E. W. Weisstein. *Kelvin Function Ber*. From MathWorld - A Wolfram Web Resource, 2015. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/Ber.html.

[1018] E. W. Weisstein. *Kelvin Function Kei*. From MathWorld - A Wolfram Web Resource, 2015. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/Kei.html.

[1019] E. W. Weisstein. *Kelvin Function Ker*. From MathWorld - A Wolfram Web Resource, 2015. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/Ker.html.

[1020] E. W. Weisstein. *Modified Struve Function L*. From MathWorld - A Wolfram Web Resource, 2015. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/ModifiedStruveFunction.html.

[1021] E. W. Weisstein. *Struve Function H*. From MathWorld - A Wolfram Web Resource, 2015. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/StruveFunction.html.

[1022] E. W. Weisstein. *Weber Function E*. From MathWorld - A Wolfram Web Resource, 2015. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/WeberFunctions.html.

[1023] E. W. Weisstein. *q-Pochhammer Symbol*. From MathWorld - A Wolfram Web Resource, 2015. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/q-PochhammerSymbol.html.

[1024] E. W. Weisstein. *Coulomb Wave Function*. From MathWorld - A Wolfram Web Resource, 2016. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/CoulombWaveFunction.html.

[1025] E. W. Weisstein. *Double Series*. From MathWorld - A Wolfram Web Resource, 2016. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/DoubleSeries.html.

[1026] E. W. Weisstein. *Generalized Hypergeometric Function 1F2*. From MathWorld - A Wolfram Web Resource, 2016. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/GeneralizedHypergeometricFunction.html.

[1027] E. W. Weisstein. *Infinite Product*. From MathWorld - A Wolfram Web Resource, 2016. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/InfiniteProduct.html.

[1028] E. W. Weisstein. *Lommel Function*. From MathWorld - A Wolfram Web Resource, 2016. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/LommelFunction.html.

[1029] E. W. Weisstein. *Madelung Constants*. From MathWorld - A Wolfram Web Resource, 2016. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/MadelungConstants.html.

[1030] E. W. Weisstein. *Parabolic Cylinder Functions*. From MathWorld - A Wolfram Web Resource, 2016. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/ParabolicCylinderFunction.html.

[1031] E. W. Weisstein. *Scorer Function Gi*. From MathWorld - A Wolfram Web Resource, 2016. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/AiryFunctions.html.WolframLanguageDocumentation:https://reference.wolfram.com/language/ref/ScorerGi.html.

[1032] E. W. Weisstein. *Scorer Function Hi*. From MathWorld - A Wolfram Web Resource, 2016. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/AiryFunctions.html.WolframLanguageDocumentation:https://reference.wolfram.com/language/ref/ScorerHi.html.

[1033] E. W. Weisstein. *Whittaker Function M*. From MathWorld - A Wolfram Web Resource, 2016. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/WhittakerFunction.html..WolframLanguageDocumentation:https://reference.wolfram.com/language/ref/WhittakerM.html.

[1034] E. W. Weisstein. *Whittaker Function W*. From MathWorld - A Wolfram Web Resource, 2016. [Online; accessed 22-July-2024]. URL: http://mathworld.wolfram.com/WhittakerFunction.html..WolframLanguageDocumentation:https://reference.wolfram.com/language/ref/WhittakerW.html.

[1035] E. W. Weisstein. *Circle*. From MathWorld - A Wolfram Web Resource, 2018. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathworld.wolfram.com/Circle.html.

[1036] E. W. Weisstein. *Cycloid*. From MathWorld - A Wolfram Web Resource, 2018. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathworld.wolfram.com/Cycloid.html.

[1037] E. W. Weisstein. *Ellipse*. From MathWorld - A Wolfram Web Resource, 2018. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathworld.wolfram.com/Ellipse.html.

[1038] E. W. Weisstein. *Epicycloid*. From MathWorld - A Wolfram Web Resource, 2018. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathworld.wolfram.com/Epicycloid.html.

[1039] E. W. Weisstein. *Epitrochoid*. From MathWorld - A Wolfram Web Resource, 2018. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathworld.wolfram.com/Epitrochoid.html.

[1040] E. W. Weisstein. *Fish curve*. From MathWorld - A Wolfram Web Resource, 2018. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathworld.wolfram.com/FishCurve.html.

[1041] E. W. Weisstein. *Heart curve*. From MathWorld - A Wolfram Web Resource, 2018. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathworld.wolfram.com/HeartCurve.html.

[1042] E. W. Weisstein. *Hypocycloid*. From MathWorld - A Wolfram Web Resource, 2018. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathworld.wolfram.com/Hypocycloid.html.

[1043] E. W. Weisstein. *Hypotrochoid*. From MathWorld - A Wolfram Web Resource, 2018. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathworld.wolfram.com/Hypotrochoid.html.

[1044] E. W. Weisstein. *Lemniscate of Bernoulli*. From MathWorld - A Wolfram Web Resource, 2018. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathworld.wolfram.com/Lemniscate.html.

[1045] E. W. Weisstein. *Lemniscate of Gerono*. From MathWorld - A Wolfram Web Resource, 2018. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathworld.wolfram.com/EightCurve.html.

[1046] E. W. Weisstein. *Lissajous curve*. From MathWorld - A Wolfram Web Resource, 2018. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathworld.wolfram.com/LissajousCurve.html.

[1047] E. W. Weisstein. *Superellipse (Lamé curve)*. From MathWorld - A Wolfram Web Resource, 2018. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathworld.wolfram.com/Superellipse.html.

[1048] E. W. Weisstein. *Trochoid*. From MathWorld - A Wolfram Web Resource, 2018. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathworld.wolfram.com/Trochoid.html.

[1049] E. W. Weisstein. *Archimedes Spiral*. From MathWorld - A Wolfram Web Resource, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathworld.wolfram.com/ArchimedeanSpiral.html.

[1050] E. W. Weisstein. *Butterfly curve*. From MathWorld - A Wolfram Web Resource, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathworld.wolfram.com/ButterflyCurve.html.

[1051] E. W. Weisstein. *Cardioid*. From MathWorld - A Wolfram Web Resource, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathworld.wolfram.com/Cardioid.html.

[1052] E. W. Weisstein. *Conchoid of de Sluze*. From MathWorld - A Wolfram Web Resource, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathworld.wolfram.com/ConchoidofdeSluze.html.

[1053] E. W. Weisstein. *Cycloid of Ceva*. From MathWorld - A Wolfram Web Resource, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathworld.wolfram.com/CycloidofCeva.html.

[1054] E. W. Weisstein. *Epispiral*. From MathWorld - A Wolfram Web Resource, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathworld.wolfram.com/Epispiral.html.

[1055] E. W. Weisstein. *Fermat's Spiral*. From MathWorld - A Wolfram Web Resource, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathworld.wolfram.com/FermatsSpiral.html.

[1056] E. W. Weisstein. *Freeth's Nephroid*. From MathWorld - A Wolfram Web Resource, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathworld.wolfram.com/FreethsNephroid.html.

[1057] E. W. Weisstein. *Hyperbolic Spiral*. From MathWorld - A Wolfram Web Resource, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathworld.wolfram.com/HyperbolicSpiral.html.

[1058] E. W. Weisstein. *Limaçon curve*. From MathWorld - A Wolfram Web Resource, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathworld.wolfram.com/Limacon.html.

[1059] E. W. Weisstein. *Lituus*. From MathWorld - A Wolfram Web Resource, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathworld.wolfram.com/Lituus.html.

[1060] E. W. Weisstein. *Logarithmic Spiral*. From MathWorld - A Wolfram Web Resource, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Logarithmic_spiral.

[1061] E. W. Weisstein. *Rose curve*. From MathWorld - A Wolfram Web Resource, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathworld.wolfram.com/RoseCurve.html.

[1062] E. W. Weisstein. *Strophoid*. From MathWorld - A Wolfram Web Resource, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathworld.wolfram.com/Strophoid.html.

[1063] E. W. Weisstein. *One-Sheeted Hyperboloid*. From MathWorld - A Wolfram Web Resource, 2020. [Online; accessed 22-Dec-2024]. URL: https://mathworld.wolfram.com/One-SheetedHyperboloid.html.

[1064] E. W. Weisstein. *Acnode*. From MathWorld - A Wolfram Web Resource, 2022. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathworld.wolfram.com/Acnode.html.

[1065] E. W. Weisstein. *Cissoid*. From MathWorld - A Wolfram Web Resource, 2022. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathworld.wolfram.com/Cissoid.html.

[1066] E. W. Weisstein. *Cornu Spiral*. From MathWorld - A Wolfram Web Resource, 2022. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathworld.wolfram.com/CornuSpiral.html.

[1067] E. W. Weisstein. *Cotes' Spiral*. From MathWorld - A Wolfram Web Resource, 2022. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathworld.wolfram.com/CotesSpiral.html.

[1068] E. W. Weisstein. *Crunode*. From MathWorld - A Wolfram Web Resource, 2022. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathworld.wolfram.com/Crunode.html.

[1069] E. W. Weisstein. *Cusp*. From MathWorld - A Wolfram Web Resource, 2022. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathworld.wolfram.com/Cusp.html.

[1070] E. W. Weisstein. *Maclaurin Trisectrix*. From MathWorld - A Wolfram Web Resource, 2022. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathworld.wolfram.com/MaclaurinTrisectrix.html.

[1071] E. W. Weisstein. *Nielsen's_spiral*. From MathWorld - A Wolfram Web Resource, 2022. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathworld.wolfram.com/NielsensSpiral.html.

[1072] E. W. Weisstein. *Poinsot's Spirals*. From MathWorld - A Wolfram Web Resource, 2022. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathworld.wolfram.com/PoinsotsSpirals.html.

[1073] E.J. Weniger. Nonlinear sequence transformations for the acceleration of convergence and the summation of divergent series. *Computer Physics Reports*, 10(5-6):189–371, 1989. URL: https://arxiv.org/abs/math/0306302.

[1074] Whittaker and Watson. *A Course of Modern Analysis*. Cambridge University Press, 4th edition, 1927.

[1075] D. Widder. *The Laplace Transform*. Princeton, 1941.

[1076] P. Wieschollek. Cppoptimizationlibrary. 2016. Available as https://github.com/PatWie/CppNumericalSolvers/tree/master.

[1077] Wikipedia. *Adaptive quadrature*. Wikimedia Foundation, 2004. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Adaptive_quadrature.

[1078] Wikipedia. *Anderson–Björck algorithm*. Wikimedia Foundation, 2004. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Regula_falsi#Anderson%E2%80%93Bj%C3%B6rck_algorithm.

[1079] Wikipedia. *Bell polynomials*. Wikimedia Foundation, 2004. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Bell_polynomials.

[1080] Wikipedia. *Bisection method*. Wikimedia Foundation, 2004. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Bisection_method.

[1081] Wikipedia. *Brent's method*. Wikimedia Foundation, 2004. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Brent%27s_method.

[1082] Wikipedia. *Cornish-Fisher expansion*. Wikimedia Foundation, 2004. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Cornish-Fisher_expansion.

[1083] Wikipedia. *Cubic equation*. Wikimedia Foundation, 2004. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Cubic_equation.

[1084] Wikipedia. *Durand-Kerner method*. Wikimedia Foundation, 2004. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Durand%E2%80%93Kerner_method.

[1085] Wikipedia. *Edgeworth_series*. Wikimedia Foundation, 2004. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Edgeworth_series#The_Edgeworth_series.

[1086] Wikipedia. *Halley's method*. Wikimedia Foundation, 2004. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Halley%27s_method.

[1087] Wikipedia. *Illinois_algorithm*. Wikimedia Foundation, 2004. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Regula_falsi#The_Illinois_algorithm.

[1088] Wikipedia. *Muller's method*. Wikimedia Foundation, 2004. [Online; accessed 22-July-2024]. URL: http://en.wikipedia.org/wiki/Muller's_method.

[1089] Wikipedia. *Newton's method*. Wikimedia Foundation, 2004. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Newton%27s_method.

[1090] Wikipedia. *Numerical integration*. Wikimedia Foundation, 2004. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Numerical_integration.

[1091] Wikipedia. *QUADPACK*. Wikimedia Foundation, 2004. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/QUADPACK.

[1092] Wikipedia. *Quadratic equation*. Wikimedia Foundation, 2004. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Quadratic_equation.

[1093] Wikipedia. *Quartic equation*. Wikimedia Foundation, 2004. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Quartic_equation.

[1094] Wikipedia. *Ridders' method*. Wikimedia Foundation, 2004. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Ridders%27_method.

[1095] Wikipedia. *Secant method*. Wikimedia Foundation, 2004. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Secant_method.

[1096] Wikipedia. *Steffensen's method*. Wikimedia Foundation, 2004. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Steffensen%27s_method.

[1097] Wikipedia. *Truncation error (numerical integration)*. Wikimedia Foundation, 2004. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Truncation_error_(numerical_integration).

[1098] Wikipedia. *BulirschStoer algorithm*. Wikimedia Foundation, 2005. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Bulirsch%E2%80%93Stoer_algorithm.

[1099] Wikipedia. *Cash-Karp method.* Wikimedia Foundation, 2005. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Cash%E2%80%93Karp_method.

[1100] Wikipedia. *Clenshaw-Curtis quadrature*. Wikimedia Foundation, 2005. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Clenshaw%E2%80%93Curtis_quadrature.

[1101] Wikipedia. *Dormand-Prince method.* Wikimedia Foundation, 2005. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Dormand%E2%80%93Prince_method.

[1102] Wikipedia. *Families of multistep methods.* Wikimedia Foundation, 2005. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Linear_multistep_method#Families_of_multistep_methods.

[1103] Wikipedia. *Gauss-Hermite quadrature*. Wikimedia Foundation, 2005. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Gauss%E2%80%93Hermite_quadrature.

[1104] Wikipedia. *Gauss-Jacobi quadrature*. Wikimedia Foundation, 2005. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Gauss%E2%80%93Jacobi_quadrature.

[1105] Wikipedia. *Gauss-Kronrod quadrature formula*. Wikimedia Foundation, 2005. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Gauss%E2%80%93Kronrod_quadrature_formula.

[1106] Wikipedia. *Gauss-Laguerre quadrature*. Wikimedia Foundation, 2005. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Gauss%E2%80%93Laguerre_quadrature.

[1107] Wikipedia. *Gauss-Legendre quadrature*. Wikimedia Foundation, 2005. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Gauss%E2%80%93Legendre_quadrature.

[1108] Wikipedia. *Initial value problem.* Wikimedia Foundation, 2005. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Initial_value_problem.

[1109] Wikipedia. *Richardson extrapolation.* Wikimedia Foundation, 2005. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Richardson_extrapolation.

[1110] Wikipedia. *Runge-Kutta methods.* Wikimedia Foundation, 2005. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Runge%E2%80%93Kutta_methods.

[1111] Wikipedia. *Runge-Kutta-Fehlberg method.* Wikimedia Foundation, 2005. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Runge%E2%80%93Kutta%E2%80%93Fehlberg_method.

[1112] Wikipedia. *Series acceleration.* Wikimedia Foundation, 2005. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Series_acceleration.

[1113] Wikipedia. *Shanks transformation.* Wikimedia Foundation, 2005. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Shanks_transformation.

[1114] Wikipedia. *Tanh-sinh quadrature*. Wikimedia Foundation, 2005. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Tanh-sinh_quadrature.

[1115] Wikipedia. *Trapezoidal rule*. Wikimedia Foundation, 2005. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Trapezoidal_rule.

[1116] Wikipedia. *Characteristic function (probability theory)*. Wikimedia Foundation, 2006. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Characteristic_function_(probability_theory).

[1117] Wikipedia. *Cumulant*. Wikimedia Foundation, 2006. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Cumulant#Definition.

[1118] Wikipedia. *Cumulative distribution function*. Wikimedia Foundation, 2006. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Cumulative_distribution_function.

[1119] Wikipedia. *Excess kurtosis*. Wikimedia Foundation, 2006. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Kurtosis#Excess_kurtosis.

[1120] Wikipedia. *Expected value*. Wikimedia Foundation, 2006. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Expected_value.

[1121] Wikipedia. *Fat-tailed distribution*. Wikimedia Foundation, 2006. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Fat-tailed_distribution.

[1122] Wikipedia. *Hazard function and cumulative hazard function*. Wikimedia Foundation, 2006. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Survival_analysis#Hazard_function_and_cumulative_hazard_function.

[1123] Wikipedia. *Heavy-tailed distribution*. Wikimedia Foundation, 2006. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Heavy-tailed_distribution.

[1124] Wikipedia. *Inverse functions and differentiation*. Wikimedia Foundation, 2006. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Inverse_functions_and_differentiation.

[1125] Wikipedia. *Kurtosis*. Wikimedia Foundation, 2006. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Kurtosis.

[1126] Wikipedia. *Median*. Wikimedia Foundation, 2006. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Median.

[1127] Wikipedia. *Mode (statistics). Wikipedia*. Wikimedia Foundation, 2006. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Mode_(statistics).

[1128] Wikipedia. *Moment (mathematics)*. Wikimedia Foundation, 2006. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Saddlepoint_approximation_method.

[1129] Wikipedia. *Moment-generating function*. Wikimedia Foundation, 2006. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Moment-generating_function.

[1130] Wikipedia. *Probability density function*. Wikimedia Foundation, 2006. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Probability_density_function.

[1131] Wikipedia. *Probability distribution*. Wikimedia Foundation, 2006. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Probability_distribution.

[1132] Wikipedia. *Quantile function*. Wikimedia Foundation, 2006. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Quantile_function.

[1133] Wikipedia. *Saddlepoint approximation method*. Wikimedia Foundation, 2006. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Saddlepoint_approximation_method.

[1134] Wikipedia. *Skewness*. Wikimedia Foundation, 2006. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Skewness.

[1135] Wikipedia. *Standard deviation*. Wikimedia Foundation, 2006. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Standard_deviation.

[1136] Wikipedia. *Support (mathematics). Wikipedia*. Wikimedia Foundation, 2006. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Support_(mathematics).

[1137] Wikipedia. *Survival function*. Wikimedia Foundation, 2006. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Survival_function#Parametric_survival_functions.

[1138] Wikipedia. *Symmetric probability distribution*. Wikimedia Foundation, 2006. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Symmetric_probability_distribution.

[1139] Wikipedia. *Variance*. Wikimedia Foundation, 2006. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Variance.

[1140] Wikipedia. *Arcsine distribution.* Wikimedia Foundation, 2007. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Arcsine_distribution.

[1141] Wikipedia. *Beta distribution.* Wikimedia Foundation, 2007. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Beta_distribution.

[1142] Wikipedia. *Cauchy distribution.* Wikimedia Foundation, 2007. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Cauchy_distribution.

[1143] Wikipedia. *Chi-squared distribution.* Wikimedia Foundation, 2007. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Chi-squared_distribution.

[1144] Wikipedia. *Definition of entropy and differential entropy*. Wikimedia Foundation, 2007. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Maximum_entropy_probability_distribution#Definition_of_entropy_and_differential_entropy.

[1145] Wikipedia. *Exponential distribution.* Wikimedia Foundation, 2007. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Exponential_distribution.

[1146] Wikipedia. *F-distribution.* Wikimedia Foundation, 2007. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/F-distribution.

[1147] Wikipedia. *Gamma distribution.* Wikimedia Foundation, 2007. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Gamma_distribution.

[1148] Wikipedia. *Gumbel distribution.* Wikimedia Foundation, 2007. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Gumbel_distribution.

[1149] Wikipedia. *Hazard function and cumulative hazard function*. Wikimedia Foundation, 2007. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Likelihood_function.

[1150] Wikipedia. *Inverse Gaussian distribution.* Wikimedia Foundation, 2007. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Inverse_Gaussian_distribution.

[1151] Wikipedia. *Inverse-gamma distribution.* Wikimedia Foundation, 2007. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Inverse-gamma_distribution.

[1152] Wikipedia. *Laplace distribution.* Wikimedia Foundation, 2007. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Laplace_distribution.

[1153] Wikipedia. *Log-normal distribution.* Wikimedia Foundation, 2007. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Log-normal_distribution.

[1154] Wikipedia. *Logistic distribution.* Wikimedia Foundation, 2007. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Logistic_distribution.

[1155] Wikipedia. *Mixture distribution.* Wikimedia Foundation, 2007. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Mixture_distribution.

[1156] Wikipedia. *Mixture distribution.* Wikimedia Foundation, 2007. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Convolution_of_probability_distributions.

[1157] Wikipedia. *Noncentral F-distribution.* Wikimedia Foundation, 2007. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Noncentral_F-distribution.

[1158] Wikipedia. *Noncentral beta distribution.* Wikimedia Foundation, 2007. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Noncentral_beta_distribution.

[1159] Wikipedia. *Noncentral chi-squared distribution.* Wikimedia Foundation, 2007. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Noncentral_chi-squared_distribution.

[1160] Wikipedia. *Noncentral t-distribution.* Wikimedia Foundation, 2007. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Noncentral_t-distribution.

[1161] Wikipedia. *Normal distribution.* Wikimedia Foundation, 2007. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Normal_distribution.

[1162] Wikipedia. *Pareto distribution.* Wikimedia Foundation, 2007. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Pareto_distribution.

[1163] Wikipedia. *Pearson correlation coefficient.* Wikimedia Foundation, 2007. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Pearson_correlation_coefficient#Using_the_exact_distribution.

[1164] Wikipedia. *Probability mass function.* Wikimedia Foundation, 2007. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Probability_mass_function.

[1165] Wikipedia. *Probability-generating function.* Wikimedia Foundation, 2007. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Probability-generating_function.

[1166] Wikipedia. *Student's t-distribution.* Wikimedia Foundation, 2007. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Student%27s_t-distribution.

[1167] Wikipedia. *Bernoulli distribution.* Wikimedia Foundation, 2008. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Bernoulli_distribution.

[1168] Wikipedia. *Binomial distribution.* Wikimedia Foundation, 2008. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Binomial_distribution.

[1169] Wikipedia. *Birnbaum-Saunders distribution.* Wikimedia Foundation, 2008. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Birnbaum-Saunders_distribution.

[1170] Wikipedia. *Chi distribution.* Wikimedia Foundation, 2008. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/chi_distribution.

[1171] Wikipedia. *Geometric distribution.* Wikimedia Foundation, 2008. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Geometric_distribution.

[1172] Wikipedia. *Half-normal distribution.* Wikimedia Foundation, 2008. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Half-normal_distribution.

[1173] Wikipedia. *Hyperexponential distribution.* Wikimedia Foundation, 2008. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Hyperexponential_distribution.

[1174] Wikipedia. *Hypergeometric distribution.* Wikimedia Foundation, 2008. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Hypergeometric_distribution.

[1175] Wikipedia. *Inverse-chi-squared distribution.* Wikimedia Foundation, 2008. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Inverse-chi-squared_distribution.

[1176] Wikipedia. *Jonckheere's trend test.* Wikimedia Foundation, 2008. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Jonckheere%27s_trend_test.

[1177] Wikipedia. *Kendall rank correlation coefficient.* Wikimedia Foundation, 2008. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Kendall_rank_correlation_coefficient#Significance_tests.

[1178] Wikipedia. *Kumaraswamy distribution.* Wikimedia Foundation, 2008. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Kumaraswamy_distribution.

[1179] Wikipedia. *Lévy distribution.* Wikimedia Foundation, 2008. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/LÃlvy_distribution.

[1180] Wikipedia. *Mann–Whitney U test.* Wikimedia Foundation, 2008. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Mann-Whitney_U_test.

[1181] Wikipedia. *Maxwell distribution.* Wikimedia Foundation, 2008. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Maxwell_distribution.

[1182] Wikipedia. *Nakagami distribution.* Wikimedia Foundation, 2008. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Nakagami_distribution.

[1183] Wikipedia. *Negative binomial distribution.* Wikimedia Foundation, 2008. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Negative_binomial_distribution.

[1184] Wikipedia. *Poisson distribution.* Wikimedia Foundation, 2008. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Poisson_distribution.

[1185] Wikipedia. *Rayleigh distribution.* Wikimedia Foundation, 2008. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Rayleigh_distribution.

[1186] Wikipedia. *Skew normal distribution.* Wikimedia Foundation, 2008. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Skew_normal_distribution.

[1187] Wikipedia. *Triangular distribution.* Wikimedia Foundation, 2008. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Triangular_distribution.

[1188] Wikipedia. *Uniform (continuous) distribution.* Wikimedia Foundation, 2008. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Uniform_distribution_(continuous).

[1189] Wikipedia. *Weibull distribution.* Wikimedia Foundation, 2008. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Weibull_distribution.

[1190] Wikipedia. *Wilcoxon signed-rank test.* Wikimedia Foundation, 2008. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Wilcoxon_signed-rank_test.

[1191] Wikipedia. *Beta prime distribution.* Wikimedia Foundation, 2009. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Beta_prime_distribution.

[1192] Wikipedia. *Burr distribution.* Wikimedia Foundation, 2009. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Burr_distribution.

[1193] Wikipedia. *Dagum distribution.* Wikimedia Foundation, 2009. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Dagum_distribution.

[1194] Wikipedia. *Erlang distribution.* Wikimedia Foundation, 2009. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Erlang_distribution.

[1195] Wikipedia. *Exponential generalized beta distribution.* Wikimedia Foundation, 2009. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Generalized_beta_distribution#Exponential_generalized_beta_distribution.

[1196] Wikipedia. *Exponentially Modified Gaussian distribution.* Wikimedia Foundation, 2009. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Exponentially_modified_Gaussian_distribution.

[1197] Wikipedia. *Feller–Pareto distribution.* Wikimedia Foundation, 2009. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Generalized_beta_distribution#Exponential_generalized_beta_distribution.

[1198] Wikipedia. *Folded normal distribution.* Wikimedia Foundation, 2009. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Folded_normal_distribution.

[1199] Wikipedia. *Fréchet distribution.* Wikimedia Foundation, 2009. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Fr%C3%A9chet_distribution.

[1200] Wikipedia. *GEV distribution.* Wikimedia Foundation, 2009. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Generalized_extreme_value_distribution.

[1201] Wikipedia. *Generalized Pareto distribution.* Wikimedia Foundation, 2009. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Generalized_Pareto_distribution.

[1202] Wikipedia. *Generalized Pareto distribution.* Wikimedia Foundation, 2009. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Generalized_Pareto_distribution.

[1203] Wikipedia. *Generalized beta distribution.* Wikimedia Foundation, 2009. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Generalized_beta_distribution.

[1204] Wikipedia. *Generalized gamma distribution.* Wikimedia Foundation, 2009. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Generalized_gamma_distribution.

[1205] Wikipedia. *Generalized logistic distribution.* Wikimedia Foundation, 2009. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Generalized_logistic_distribution.

[1206] Wikipedia. *Generalized normal distribution.* Wikimedia Foundation, 2009. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Generalized_normal_distribution#Symmetric_version.

[1207] Wikipedia. *Hypoexponential Distribution.* Wikimedia Foundation, 2009. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Hypoexponential_distribution.

[1208] Wikipedia. *Johnson SU and SB distribution.* Wikimedia Foundation, 2009. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Johnson%27s_SU-distribution.

[1209] Wikipedia. *Log-logistic (Fisk) distribution.* Wikimedia Foundation, 2009. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Log-logistic_distribution.

[1210] Wikipedia. *Lomax distribution.* Wikimedia Foundation, 2009. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Lomax_distribution.

[1211] Wikipedia. *Noncentral chi distribution.* Wikimedia Foundation, 2009. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Noncentral_chi_distribution.

[1212] Wikipedia. *Shifted Gompertz distribution.* Wikimedia Foundation, 2009. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Shifted_Gompertz_distribution.

[1213] Wikipedia. *Studentized range distribution.* Wikimedia Foundation, 2009. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Studentized_range_distribution.

[1214] Wikipedia. *Truncated normal distribution.* Wikimedia Foundation, 2009. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Truncated_normal_distribution.

[1215] Wikipedia. *Voigt profile.* Wikimedia Foundation, 2009. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Voigt_profile.

[1216] Wikipedia. *Fisher's noncentral hypergeometric distribution.* Wikimedia Foundation, 2010. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Fisher%27s_noncentral_hypergeometric_distribution.

[1217] Wikipedia. *Incomplete beta function.* Wikimedia Foundation, 2010. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Beta_function#Incomplete_beta_function.

[1218] Wikipedia. *Incomplete gamma function.* Wikimedia Foundation, 2010. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Incomplete_gamma_function.

[1219] Wikipedia. *Landau distribution.* Wikimedia Foundation, 2010. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Landau_distribution.

[1220] Wikipedia. *Logarithmic distribution.* Wikimedia Foundation, 2010. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Logarithmic_distribution.

[1221] Wikipedia. *Pearson correlation coefficient, exact distribution.* Wikimedia Foundation, 2010. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Pearson_correlation_coefficient#Using_the_exact_distribution.

[1222] Wikipedia. *Rice distribution.* Wikimedia Foundation, 2010. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Rice_distribution.

[1223] Wikipedia. *Stable distribution.* Wikimedia Foundation, 2010. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Stable_distribution.

[1224] Wikipedia. *Zeta distribution.* Wikimedia Foundation, 2010. [Online; accessed 22-July-2024]. URL: https://mathworld.wolfram.com/ZipfDistribution.html.

[1225] Wikipedia. *Common logarithm.* Wikimedia Foundation, 2011. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Common_logarithm.

[1226] Wikipedia. *Complementary error function.* Wikimedia Foundation, 2011. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Error_function#Complementary_error_function.

[1227] Wikipedia. *Complex logarithm.* Wikimedia Foundation, 2011. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Complex_logarithm.

[1228] Wikipedia. *Cube root.* Wikimedia Foundation, 2011. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Cube_root.

[1229] Wikipedia. *Error function.* Wikimedia Foundation, 2011. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Error_function.

[1230] Wikipedia. *Exponential function (expm1).* Wikimedia Foundation, 2011. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Exponential_function#expm1.

[1231] Wikipedia. *Exponential function.* Wikimedia Foundation, 2011. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Exponential_function.

[1232] Wikipedia. *Exponentiation.* Wikimedia Foundation, 2011. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Exponentiation.

[1233] Wikipedia. *Hyperbolic functions.* Wikimedia Foundation, 2011. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Hyperbolic_function.

[1234] Wikipedia. *Imaginary error function.* Wikimedia Foundation, 2011. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Error_function#Imaginary_error_function.

[1235] Wikipedia. *Natural logarithm (log1p).* Wikimedia Foundation, 2011. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Natural_logarithm#High_precision.

[1236] Wikipedia. *Natural logarithm.* Wikimedia Foundation, 2011. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Natural_logarithm.

[1237] Wikipedia. *Power of 10.* Wikimedia Foundation, 2011. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Power_of_10.

[1238] Wikipedia. *Power of two.* Wikimedia Foundation, 2011. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Power_of_two.

[1239] Wikipedia. *Sine.* Wikimedia Foundation, 2011. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Sine.

[1240] Wikipedia. *Square (algebra).* Wikimedia Foundation, 2011. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Square_(algebra).

[1241] Wikipedia. *Square root.* Wikimedia Foundation, 2011. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Square_root.

[1242] Wikipedia. *Trigonometric functions.* Wikimedia Foundation, 2011. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Trigonometric_functions.

[1243] Wikipedia. *Bernoulli number.* Wikimedia Foundation, 2012. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Bernoulli_number.

[1244] Wikipedia. *Bernoulli polynomials.* Wikimedia Foundation, 2012. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Bernoulli_polynomials.

[1245] Wikipedia. *Bessel functions of the first kind.* Wikimedia Foundation, 2012. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Bessel_function#Bessel_functions_of_the_first_kind.

[1246] Wikipedia. *Bessel functions of the second kind*. Wikimedia Foundation, 2012. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Bessel_function#Bessel_functions_of_the_second_kind.

[1247] Wikipedia. *Beta function.* Wikimedia Foundation, 2012. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Beta_function.

[1248] Wikipedia. *Binomial coefficient.* Wikimedia Foundation, 2012. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Binomial_coefficient.

[1249] Wikipedia. *Confluent Hypergeometric Limit Function*. Wikimedia Foundation, 2012. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Generalized_hypergeometric_function#The_series_0F1.

[1250] Wikipedia. *Confluent hypergeometric function*. Wikimedia Foundation, 2012. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Confluent_hypergeometric_function.

[1251] Wikipedia. *Factorial.* Wikimedia Foundation, 2012. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Factorial.

[1252] Wikipedia. *Falling and rising factorials.* Wikimedia Foundation, 2012. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Falling_and_rising_factorials.

[1253] Wikipedia. *Gamma function.* Wikimedia Foundation, 2012. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Gamma_function.

[1254] Wikipedia. *Hypergeometric (Gauss) function*. Wikimedia Foundation, 2012. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Hypergeometric_function.

[1255] Wikipedia. *Inverse Trigonometric functions.* Wikimedia Foundation, 2012. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Inverse_trigonometric_functions.

[1256] Wikipedia. *Inverse hyperbolic functions.* Wikimedia Foundation, 2012. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Inverse_hyperbolic_functions.

[1257] Wikipedia. *Lambert W function.* Wikimedia Foundation, 2012. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Lambert_W_function.

[1258] Wikipedia. *Machine epsilon*. Wikimedia Foundation, 2012. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Machine_epsilon.

[1259] Wikipedia. *Modified Bessel functions*. Wikimedia Foundation, 2012. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Bessel_function#Modified_Bessel_functions.

[1260] Wikipedia. *Natural logarithm of 2*. Wikimedia Foundation, 2012. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Natural_logarithm_of_2.

[1261] Wikipedia. *Pi*. Wikimedia Foundation, 2012. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Pi.

[1262] Wikipedia. *Polygamma function.* Wikimedia Foundation, 2012. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Polygamma_function.

[1263] Wikipedia. *Reciprocal gamma function.* Wikimedia Foundation, 2012. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Reciprocal_gamma_function.

[1264] Wikipedia. *The log-gamma function.* Wikimedia Foundation, 2012. [Online; accessed 22-July-2024]. URL: https://en.wikipedia.org/wiki/Gamma_function#The_log-gamma_function.

[1265] Wikipedia. *e (mathematical constant)*. Wikimedia Foundation, 2012. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/E_(mathematical_constant).

[1266] Wikipedia. *Apéry's constant*. Wikimedia Foundation, 2013. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/ApÃľry%27s_constant.

[1267] Wikipedia. *Arithmetic-geometric mean*. Wikimedia Foundation, 2013. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Arithmetic-geometric_mean.

[1268] Wikipedia. *Atan2*. Wikimedia Foundation, 2013. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Atan2.

[1269] Wikipedia. *Conversion between radians and degrees*. Wikimedia Foundation, 2013. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Radian#Conversion_between_radians_and_degrees.

[1270] Wikipedia. *Digamma function*. Wikimedia Foundation, 2013. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Digamma_function.

[1271] Wikipedia. *Double factorial*. Wikimedia Foundation, 2013. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Double_factorial.

[1272] Wikipedia. *Euler number*. Wikimedia Foundation, 2013. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Euler_numbers.

[1273] Wikipedia. *Euler polynomials; in: Bernoulli polynomials*. Wikimedia Foundation, 2013. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Bernoulli_polynomials.

[1274] Wikipedia. *Euler-Mascheroni constant*. Wikimedia Foundation, 2013. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Euler-Mascheroni_constant.

[1275] Wikipedia. *Glaisher-Kinkelin constant*. Wikimedia Foundation, 2013. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Glaisher-Kinkelin_constant.

[1276] Wikipedia. *Golden ratio*. Wikimedia Foundation, 2013. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Golden_ratio.

[1277] Wikipedia. *Golden ratio*. Wikimedia Foundation, 2013. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Golden_ratio.

[1278] Wikipedia. *Group of nth roots of unity*. Wikimedia Foundation, 2013. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Root_of_unity#Group_of_nth_roots_of_unity.

[1279] Wikipedia. *Harmonic number*. Wikimedia Foundation, 2013. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Harmonic_number.

[1280] Wikipedia. *Hyperfactorial*. Wikimedia Foundation, 2013. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Factorial#Hyperfactorial.

[1281] Wikipedia. *Hypotenuse*. Wikimedia Foundation, 2013. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Hypotenuse.

[1282] Wikipedia. *Khinchin's constant*. Wikimedia Foundation, 2013. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Khinchin%27s_constant.

[1283] Wikipedia. *Prime number theorem*. Wikimedia Foundation, 2013. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Prime_number_theorem.

[1284] Wikipedia. *Prime-counting function*. Wikimedia Foundation, 2013. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Bernoulli_polynomials.

[1285] Wikipedia. *Prime-counting function*. Wikimedia Foundation, 2013. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Prime-counting_function.

[1286] Wikipedia. *Sinc function*. Wikimedia Foundation, 2013. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Sinc_function.

[1287] Wikipedia. *Superfactorial*. Wikimedia Foundation, 2013. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Factorial#Superfactorial.

[1288] Wikipedia. *Trigamma function*. Wikimedia Foundation, 2013. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Trigamma_function.

[1289] Wikipedia. *Airy function*. Wikimedia Foundation, 2014. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Airy_function.

[1290] Wikipedia. *Associated Legendre polynomials*. Wikimedia Foundation, 2014. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Associated_Legendre_polynomials.

[1291] Wikipedia. *Barnes G-function*. Wikimedia Foundation, 2014. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Barnes_G-function.

[1292] Wikipedia. *Bulirsch-Integrale*. Wikimedia Foundation, 2014. [Online; accessed 22-Dec-2024]. URL: https://de.wikipedia.org/wiki/Elliptisches_Integral#Bulirsch-Integrale.

[1293] Wikipedia. *Carlson symmetric form*. Wikimedia Foundation, 2014. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Carlson_symmetric_form.

[1294] Wikipedia. *Chebyshev polynomials*. Wikimedia Foundation, 2014. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Chebyshev_polynomials.

[1295] Wikipedia. *Complete elliptic integral of the first kind*. Wikimedia Foundation, 2014. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Elliptic_integral#Complete_elliptic_integral_of_the_first_kind.

[1296] Wikipedia. *Complete elliptic integral of the second kind*. Wikimedia Foundation, 2014. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Elliptic_integral#Complete_elliptic_integral_of_the_second_kind.

[1297] Wikipedia. *Complete elliptic integral of the third kind*. Wikimedia Foundation, 2014. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Elliptic_integral#Complete_elliptic_integral_of_the_third_kind.

[1298] Wikipedia. *Elliptic function*. Wikimedia Foundation, 2014. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Elliptic_function.

[1299] Wikipedia. *Gegenbauer polynomials*. Wikimedia Foundation, 2014. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Gegenbauer_polynomials.

[1300] Wikipedia. *Hankel functions*. Wikimedia Foundation, 2014. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Bessel_function#Hankel_functions.

[1301] Wikipedia. *Hermite polynomials*. Wikimedia Foundation, 2014. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Hermite_polynomials.

[1302] Wikipedia. *Incomplete elliptic integral of the first kind*. Wikimedia Foundation, 2014. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Elliptic_integral#Incomplete_elliptic_integral_of_the_first_kind.

[1303] Wikipedia. *Incomplete elliptic integral of the second kind*. Wikimedia Foundation, 2014. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Elliptic_integral#Incomplete_elliptic_integral_of_the_second_kind.

[1304] Wikipedia. *Incomplete elliptic integral of the third kind*. Wikimedia Foundation, 2014. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Elliptic_integral#Incomplete_elliptic_integral_of_the_third_kind.

[1305] Wikipedia. *Jacobi elliptic functions*. Wikimedia Foundation, 2014. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Jacobi_elliptic_functions.

[1306] Wikipedia. *Jacobi polynomials*. Wikimedia Foundation, 2014. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Jacobi_polynomials.

[1307] Wikipedia. *Laguerre polynomials*. Wikimedia Foundation, 2014. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Laguerre_polynomials.

[1308] Wikipedia. *Legendre polynomials*. Wikimedia Foundation, 2014. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Legendre_polynomials.

[1309] Wikipedia. *Spherical Bessel functions*. Wikimedia Foundation, 2014. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Bessel_function#Spherical_Bessel_functions:_jn,_yn.

[1310] Wikipedia. *Spherical Hankel functions*. Wikimedia Foundation, 2014. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Bessel_function#Spherical_Hankel_functions:_h(1)n,_h(2)n.

[1311] Wikipedia. *Spherical harmonics*. Wikimedia Foundation, 2014. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Spherical_harmonics.

[1312] Wikipedia. *Theta function*. Wikimedia Foundation, 2014. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Theta_function.

[1313] Wikipedia. *Complete Fermi-Dirac integral*. Wikimedia Foundation, 2015. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Complete_Fermi%E2%80%93Dirac_integral.

[1314] Wikipedia. *Cosine integral*. Wikimedia Foundation, 2015. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Trigonometric_integral#Cosine_integral.

[1315] Wikipedia. *Exponential integral*. Wikimedia Foundation, 2015. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Exponential_integral.

[1316] Wikipedia. *Faddeeva function*. Wikimedia Foundation, 2015. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Faddeeva_function.

[1317] Wikipedia. *Fresnel integral*. Wikimedia Foundation, 2015. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Fresnel_integral.

[1318] Wikipedia. *Goodwin-Staton integral*. Wikimedia Foundation, 2015. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Goodwin-Staton_integral.

[1319] Wikipedia. *Hurwitz zeta function*. Wikimedia Foundation, 2015. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Hurwitz_zeta_function.

[1320] Wikipedia. *Hyperbolic cosine integral*. Wikimedia Foundation, 2015. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Trigonometric_integral#Hyperbolic_cosine_integral.

[1321] Wikipedia. *Hyperbolic sine integral*. Wikimedia Foundation, 2015. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Trigonometric_integral#Hyperbolic_sine_integral.

[1322] Wikipedia. *Legendre chi function*. Wikimedia Foundation, 2015. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Legendre_chi_function.

[1323] Wikipedia. *Lemniscate elliptic functions*. Wikimedia Foundation, 2015. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Lemniscate_elliptic_functions.

[1324] Wikipedia. *Logarithmic integral function*. Wikimedia Foundation, 2015. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Logarithmic_integral_function.

[1325] Wikipedia. *Neville theta functions*. Wikimedia Foundation, 2015. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Neville_theta_functions.

[1326] Wikipedia. *Polylogarithm*. Wikimedia Foundation, 2015. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Polylogarithm.

[1327] Wikipedia. *Polylogarithm, inverse tangent integral*. Wikimedia Foundation, 2015. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Polylogarithm#Relationship_to_other_functions.

[1328] Wikipedia. *Riemann zeta function*. Wikimedia Foundation, 2015. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Riemann_zeta_function.

[1329] Wikipedia. *Sine integral*. Wikimedia Foundation, 2015. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Trigonometric_integral#Sine_integral.

[1330] Wikipedia. *Spence's function*. Wikimedia Foundation, 2015. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Spence%27s_function.

[1331] Wikipedia. *Voigt profile*. Wikimedia Foundation, 2015. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Voigt_profile.

[1332] Wikipedia. *Catalan number*. Wikimedia Foundation, 2016. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Catalan_number.

[1333] Wikipedia. *Dawson function*. Wikimedia Foundation, 2016. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Dawson_function.

[1334] Wikipedia. *Debye functions and polylogarithms*. Wikimedia Foundation, 2016. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Debye_functionandhttps://en.wikipedia.org/wiki/Polylogarithm.

[1335] Wikipedia. *Dirichlet beta function*. Wikimedia Foundation, 2016. [Online; accessed 22-Dec-2024]. URL: http://en.wikipedia.org/wiki/Dirichlet_beta_function.

[1336] Wikipedia. *Fibonacci Number*. Wikimedia Foundation, 2016. [Online; accessed 22-Dec-2024]. URL: http://mathworld.wolfram.com/FibonacciNumber.html.

[1337] Wikipedia. *Fibonacci Polynomials*. Wikimedia Foundation, 2016. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Fibonacci_polynomials.

[1338] Wikipedia. *Gudermannian function*. Wikimedia Foundation, 2016. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Gudermannian_function.

[1339] Wikipedia. *Haversine*. Wikimedia Foundation, 2016. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Versine#Haversineandhttps://en.wikipedia.org/wiki/Haversine_formula.

[1340] Wikipedia. *Inverse Gudermannian function*. Wikimedia Foundation, 2016. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Gudermannian_function#Inverse.

[1341] Wikipedia. *Inverse Haversine*. Wikimedia Foundation, 2016. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Versine#Inverse_functions.

[1342] Wikipedia. *Logistic function*. Wikimedia Foundation, 2016. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Logistic_function.

[1343] Wikipedia. *Logit function*. Wikimedia Foundation, 2016. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Logit.

[1344] Wikipedia. *Lucas Number*. Wikimedia Foundation, 2016. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Lucas_number.

[1345] Wikipedia. *Lucas Polynomials*. Wikimedia Foundation, 2016. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Lucas_sequenceandhttps://en.wikipedia.org/wiki/Fibonacci_polynomials.

[1346] Wikipedia. *Marcum Q-function*. Wikimedia Foundation, 2016. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Owen%27s_T_function.

[1347] Wikipedia. *Owen's T function*. Wikimedia Foundation, 2016. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Owen%27s_T_function.

[1348] Wikipedia. *Riemann Xi*. Wikimedia Foundation, 2016. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Riemann_Xi_function.

[1349] Wikipedia. *Weierstrass elliptic function: Modular discriminant*. Wikimedia Foundation, 2016. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Weierstrass_elliptic_function#Modular_discriminant.

[1350] Wikipedia. *Clausen function*. Wikimedia Foundation, 2017. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Clausen_function.

[1351] Wikipedia. *Half-period ratio*. Wikimedia Foundation, 2017. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Half-period_ratio.

[1352] Wikipedia. *Lerch's transcendent (Lerch zeta function)*. Wikimedia Foundation, 2017. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Lerch_zeta_function.

[1353] Wikipedia. *Nome (mathematics)*. Wikimedia Foundation, 2017. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Nome_(mathematics).

[1354] Wikipedia. *Riemann hypothesis*. Wikimedia Foundation, 2017. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Riemann_hypothesis.

[1355] Wikipedia. *Riemann-Siegel Z function*. Wikimedia Foundation, 2017. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Z_function.

[1356] Wikipedia. *Riemann-Siegel theta function*. Wikimedia Foundation, 2017. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Riemann-Siegel_theta_function.

[1357] Wikipedia. *j-invariant*. Wikimedia Foundation, 2017. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/J-invariant.

[1358] Wikipedia. *Anger function*. Wikimedia Foundation, 2018. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Anger_function.

[1359] Wikipedia. *Circle*. Wikimedia Foundation, 2018. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Circle.

[1360] Wikipedia. *Correlation matrix*. Wikimedia Foundation, 2018. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Covariance_matrix#Correlation_matrix.

[1361] Wikipedia. *Coulomb wave function*. Wikimedia Foundation, 2018. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Coulomb_wave_function.

[1362] Wikipedia. *Covariance matrix*. Wikimedia Foundation, 2018. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Covariance_matrix.

[1363] Wikipedia. *Cycloid*. Wikimedia Foundation, 2018. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Cycloid.

[1364] Wikipedia. *Ellipse*. Wikimedia Foundation, 2018. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Ellipse.

[1365] Wikipedia. *Epicycloid*. Wikimedia Foundation, 2018. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Epicycloid.

[1366] Wikipedia. *Epitrochoid*. Wikimedia Foundation, 2018. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Epitrochoid.

[1367] Wikipedia. *Euler's formula*. Wikimedia Foundation, 2018. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Euler%27s_formula.

[1368] Wikipedia. *Fish curve*. Wikimedia Foundation, 2018. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Fish_curve.

[1369] Wikipedia. *Generalized hypergeometric function*. Wikimedia Foundation, 2018. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Generalized_hypergeometric_function.

[1370] Wikipedia. *Heart curve*. Wikimedia Foundation, 2018. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Heart_symbol#Parametrisation.

[1371] Wikipedia. *Hypocycloid*. Wikimedia Foundation, 2018. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Hypocycloid.

[1372] Wikipedia. *Hypotrochoid*. Wikimedia Foundation, 2018. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Hypotrochoid.

[1373] Wikipedia. *Kelvin function bei*. Wikimedia Foundation, 2018. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Kelvin_functions#bei(x).

[1374] Wikipedia. *Kelvin function ber*. Wikimedia Foundation, 2018. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Kelvin_functions#ber(x).

[1375] Wikipedia. *Kelvin function kei*. Wikimedia Foundation, 2018. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Kelvin_functions#kei(x).

[1376] Wikipedia. *Kelvin function ker*. Wikimedia Foundation, 2018. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Kelvin_functions#ker(x).

[1377] Wikipedia. *Lemniscate of Bernoulli*. Wikimedia Foundation, 2018. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Lemniscate_of_Bernoulli.

[1378] Wikipedia. *Lemniscate of Gerono*. Wikimedia Foundation, 2018. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Lemniscate_of_Gerono.

[1379] Wikipedia. *Lissajous curve*. Wikimedia Foundation, 2018. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Lissajous_curve.

[1380] Wikipedia. *Lommel function*. Wikimedia Foundation, 2018. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Lommel_function.

[1381] Wikipedia. *Parabolic cylinder function*. Wikimedia Foundation, 2018. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Parabolic_cylinder_function.

[1382] Wikipedia. *Sample mean and covariance*. Wikimedia Foundation, 2018. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Sample_mean_and_covariance#Sample_covariance.

[1383] Wikipedia. *Scorer's function*. Wikimedia Foundation, 2018. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Scorer%27s_function.

[1384] Wikipedia. *Struve function*. Wikimedia Foundation, 2018. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Struve_function.

[1385] Wikipedia. *Superellipse (Lamé curve)*. Wikimedia Foundation, 2018. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Superellipse.

[1386] Wikipedia. *Trace (linear algebra)*. Wikimedia Foundation, 2018. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Determinant.

[1387] Wikipedia. *Trochoid*. Wikimedia Foundation, 2018. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Trochoid.

[1388] Wikipedia. *Whittaker function*. Wikimedia Foundation, 2018. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Whittaker_function.

[1389] Wikipedia. *q-Pochhammer symbol*. Wikimedia Foundation, 2018. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Q-Pochhammer_symbol.

[1390] Wikipedia. *Archimedes Spiral*. Wikimedia Foundation, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Archimedean_spiral.

[1391] Wikipedia. *Butterfly curve*. Wikimedia Foundation, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Butterfly_curve_(transcendental).

[1392] Wikipedia. *Cardioid*. Wikimedia Foundation, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Cardioid.

[1393] Wikipedia. *Cholesky decomposition*. Wikimedia Foundation, 2019. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Cholesky_decomposition.

[1394] Wikipedia. *Conchoid of de Sluze*. Wikimedia Foundation, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Conchoid_of_de_Sluze.

[1395] Wikipedia. *Cycloid of Ceva*. Wikimedia Foundation, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://de.wikipedia.org/wiki/Zykloide_von_Ceva.

[1396] Wikipedia. *Eigendecomposition of a matrix*. Wikimedia Foundation, 2019. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Eigendecomposition_of_a_matrix#Eigendecomposition_of_a_matrix.

[1397] Wikipedia. *Eigendecomposition of a matrix: Generalized_eigenvalue_problem*. Wikimedia Foundation, 2019. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Eigendecomposition_of_a_matrix#Generalized_eigenvalue_problem.

[1398] Wikipedia. *Eigendecomposition of a matrix: Useful facts*. Wikimedia Foundation, 2019. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Eigendecomposition_of_a_matrix#Useful_facts.

[1399] Wikipedia. *Epispiral*. Wikimedia Foundation, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Epispiral.

[1400] Wikipedia. *Fermat's Spiral*. Wikimedia Foundation, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Fermat%27s_spiral.

[1401] Wikipedia. *Freeth's Nephroid*. Wikimedia Foundation, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Nephroid.

[1402] Wikipedia. *Hessenberg matrix*. Wikimedia Foundation, 2019. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Hessenberg_matrix.

[1403] Wikipedia. *Householder transformation: Tridiagonalization*. Wikimedia Foundation, 2019. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Householder_transformation#Tridiagonalization.

[1404] Wikipedia. *Hyperbolic Spiral*. Wikimedia Foundation, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Hyperbolic_spiral.

[1405] Wikipedia. *LU factorization with partial pivoting*. Wikimedia Foundation, 2019. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/LU_decomposition#LU_factorization_with_partial_pivoting.

[1406] Wikipedia. *Limaçon curve*. Wikimedia Foundation, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Lima%C3%A7on.

[1407] Wikipedia. *Lituus*. Wikimedia Foundation, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Lituus_(mathematics).

[1408] Wikipedia. *Logarithmic Spiral*. Wikimedia Foundation, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://mathworld.wolfram.com/LogarithmicSpiral.html.

[1409] Wikipedia. *Moore-Penrose inverse*. Wikimedia Foundation, 2019. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Moore%E2%80%93Penrose_inverse.

[1410] Wikipedia. *Rose curve*. Wikimedia Foundation, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Maurer_rose.

[1411] Wikipedia. *Singular value decomposition*. Wikimedia Foundation, 2019. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Singular_value_decomposition.

[1412] Wikipedia. *Strophoid*. Wikimedia Foundation, 2019. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Strophoid.

[1413] Wikipedia. *Tridiagonal matrix*. Wikimedia Foundation, 2019. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Tridiagonal_matrix.

[1414] Wikipedia. *Analytic function of a matrix*. Wikimedia Foundation, 2020. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Analytic_function_of_a_matrix.

[1415] Wikipedia. *Broyden-Fletcher-Goldfarb-Shanno algorithm*. Wikimedia Foundation, 2020. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Broyden%E2%80%93Fletcher%E2%80%93Goldfarb%E2%80%93Shanno_algorithm.

[1416] Wikipedia. *CMA-ES*. Wikimedia Foundation, 2020. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/CMA-ES.

[1417] Wikipedia. *Generalized Schur decomposition*. Wikimedia Foundation, 2020. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Schur_decomposition#Generalized_Schur_decomposition.

[1418] Wikipedia. *LDL decomposition*. Wikimedia Foundation, 2020. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Cholesky_decomposition#LDL_decomposition_2.

[1419] Wikipedia. *LU factorization with full pivoting*. Wikimedia Foundation, 2020. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/LU_decomposition#LU_factorization_with_full_pivoting.

[1420] Wikipedia. *Levenberg-Marquardt algorithm*. Wikimedia Foundation, 2020. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Levenberg%E2%80%93Marquardt_algorithm.

[1421] Wikipedia. *Limited-memory BFGS*. Wikimedia Foundation, 2020. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Limited-memory_BFGS.

[1422] Wikipedia. *Logarithm of a matrix*. Wikimedia Foundation, 2020. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Logarithm_of_a_matrix.

[1423] Wikipedia. *Matrix decomposition*. Wikimedia Foundation, 2020. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Matrix_decomposition.

[1424] Wikipedia. *Matrix exponential*. Wikimedia Foundation, 2020. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Matrix_exponential.

[1425] Wikipedia. *Nelder-Mead method*. Wikimedia Foundation, 2020. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Nelder-Mead_method.

[1426] Wikipedia. *Powell's dog leg method*. Wikimedia Foundation, 2020. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Powell%27s_dog_leg_method.

[1427] Wikipedia. *QR decomposition*. Wikimedia Foundation, 2020. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/QR_decomposition.

[1428] Wikipedia. *QR decomposition*. Wikimedia Foundation, 2020. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Eigendecomposition_of_a_matrix#Generalized_eigenvalue_problem.

[1429] Wikipedia. *QR decomposition: Column pivoting*. Wikimedia Foundation, 2020. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/QR_decomposition#Column_pivoting.

[1430] Wikipedia. *Schur decomposition*. Wikimedia Foundation, 2020. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Schur_decomposition.

[1431] Wikipedia. *Square root of a matrix*. Wikimedia Foundation, 2020. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Square_root_of_a_matrix.

[1432] Wikipedia. *Trigonometric functions of matrices*. Wikimedia Foundation, 2020. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Trigonometric_functions_of_matrices.

[1433] Wikipedia. *One-sample t-test*. Wikimedia Foundation, 2021. [Online; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Student%27s_t-test#One-sample_t-test.

[1434] Wikipedia. *Acnode*. Wikimedia Foundation, 2022. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Acnode.

[1435] Wikipedia. *Cissoid*. Wikimedia Foundation, 2022. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Cissoid.

[1436] Wikipedia. *Cotes's spiral*. Wikimedia Foundation, 2022. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Cotes%27s_spiral.

[1437] Wikipedia. *Crunode*. Wikimedia Foundation, 2022. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Crunode.

[1438] Wikipedia. *Cusp (singularity)*. Wikimedia Foundation, 2022. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Cusp_(singularity).

[1439] Wikipedia. *Euler spiral*. Wikimedia Foundation, 2022. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Fresnel_integral#Euler_spiral.

[1440] Wikipedia. *Nielsen's_spiral*. Wikimedia Foundation, 2022. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Trigonometric_integral#Nielsen's_spiral.

[1441] Wikipedia. *Poinsot's spirals*. Wikimedia Foundation, 2022. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Poinsot%27s_spirals.

[1442] Wikipedia. *Singular point of a curve*. Wikimedia Foundation, 2022. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Singular_point_of_a_curve.

[1443] Wikipedia. *Trisectrix of Maclaurin*. Wikimedia Foundation, 2022. [Online; last edited on 5 December 2022; accessed 22-Dec-2024]. URL: https://en.wikipedia.org/wiki/Trisectrix_of_Maclaurin.

[1444] S. S. Wilks. Certain generalizations in the analysis of variance. *Biometrika*, 24:471–494, 1932.

[1445] S. S. Wilks. On the independence of k sets of normally distributed statistical variables. *Econometrica*, 3:309–326, 1935.

[1446] S. S. Wilks. Sample criteria for testing equality ofmeans, equality of variances, and equality of covariances in a normal multivariate distribution. *Annals of Mathematical Statistics*, 17:257–281, 1946.

[1447] A. Winterbottom. Cornish-fisher expansions for confidence limits. *Communications in Statistics, Part B – Simulation and Computation*, 41:69–79, 1979.

[1448] A. Winterbottom. Estimation for the bivariate normal correlation coefficient using asymptotic expansions. *Communications in Statistics, Part B – Simulation and Computation [Split from: @J(CommStat)]*, 9:599–609, 1980.

[1449] C. S. Withers and S. Nadarajah. Charlier and edgeworth expansions for distributions and densities in terms of bell polynomials. *Probability and Mathematical Statistics*, 29:271, 2009.

[1450] C. S. Withers and S. Nadarajah. Edgeworth–cornish–fisher–hill–davis expansions for normal and non-normal limits via bell polynomials. *Stochastics: An International Journal of Probability and Stochastic Processes*, 87:794–805, 2015.

[1451] V. Witkovsky. The characteristic functions toolbox. In *The 10th International Conference of the ERCIM Workgroup on Computational and Methodological Statistics (CMStatistics 2017)*. University of London, UK, 2017. Available from https://github.com/witkovsky/CharFunTool/blob/master/CF_Repository/.

[1452] V. Witkovský. Computing the distribution of a linear combination of inverted gamma variables. *Kybernetika*, 37(1):79–90, 2001.

[1453] V. Witkovský. On the exact computation of the density and of the quantiles of linear combinations of t and f random variables. *Journal of Statistical Planning and Inference*, 94:1–13, 2001.

[1454] V. Witkovský. A note on Computing Extreme Tail Probabilities of the Noncentral T Distribution with Large Noncentrality Parameter. *ArXiv e-prints*, 2013.

[1455] V. Witkovský. *Arcsine Distribution*. CharFunTool: The characteristic functions toolbox, 2017. [Online; accessed 22-July-2024]. URL: https://github.com/witkovsky/CharFunTool/blob/master/CF_Repository/cfS_Arcsine.m.

[1456] V. Witkovský. *Beta Distribution*. CharFunTool: The characteristic functions toolbox, 2017. [Online; accessed 22-July-2024]. URL: https://github.com/witkovsky/CharFunTool/blob/master/CF_Repository/cf_Student.m.

[1457] V. Witkovský. *Chi-Squared Dsitribution*. CharFunTool: The characteristic functions toolbox, 2017. [Online; accessed 22-July-2024]. URL: https://github.com/witkovsky/CharFunTool/blob/master/CF_Repository/cf_ChiSquare.m.

[1458] V. Witkovský. *Exponential Distribution*. CharFunTool: The characteristic functions toolbox, 2017. [Online; accessed 22-July-2024]. URL: https://github.com/witkovsky/CharFunTool/blob/master/CF_Repository/cfX_Exponential.m.

[1459] V. Witkovský. *F-Distribution*. CharFunTool: The characteristic functions toolbox, 2017. [Online; accessed 22-July-2024]. URL: https://github.com/witkovsky/CharFunTool/blob/master/CF_Repository/cf_FisherSnedecor.m.

[1460] V. Witkovský. *Gamma Distribution*. CharFunTool: The characteristic functions toolbox, 2017. [Online; accessed 22-July-2024]. URL: https://github.com/witkovsky/CharFunTool/blob/master/CF_Repository/cfX_Gamma.m.

[1461] V. Witkovský. *Gumbel Distribution*. CharFunTool: The characteristic functions toolbox, 2017. [Online; accessed 22-July-2024]. URL: https://github.com/witkovsky/CharFunTool/blob/master/CF_Repository/cf_Gumbel.m.

[1462] V. Witkovský. *Inverse Gamma Distribution*. CharFunTool: The characteristic functions toolbox, 2017. [Online; accessed 22-July-2024]. URL: https://github.com/witkovsky/CharFunTool/blob/master/CF_Repository/cfX_InverseGamma.m.

[1463] V. Witkovský. *Inverse Gaussian Distribution*. CharFunTool: The characteristic functions toolbox, 2017. [Online; accessed 22-July-2024]. URL: https://github.com/witkovsky/CharFunTool/blob/master/CF_Repository/cf_InverseGaussian.m.

[1464] V. Witkovský. *Laplace Distribution*. CharFunTool: The characteristic functions toolbox, 2017. [Online; accessed 22-July-2024]. URL: https://github.com/witkovsky/CharFunTool/blob/master/CF_Repository/cf_Laplace.m.

[1465] V. Witkovský. *Log Normal Distribution*. CharFunTool: The characteristic functions toolbox, 2017. [Online; accessed 22-July-2024]. URL: https://github.com/witkovsky/CharFunTool/blob/master/CF_Repository/cfX_LogNormal.m.

[1466] V. Witkovský. *Noncentral Beta Distribution*. CharFunTool: The characteristic functions toolbox, 2017. [Online; accessed 22-July-2024]. URL: https://github.com/witkovsky/CharFunTool/blob/master/CF_Repository/cf_BetaNC.m.

[1467] V. Witkovský. *Noncentral Chi-Squared Distribution*. CharFunTool: The characteristic functions toolbox, 2017. [Online; accessed 22-July-2024]. URL: https://github.com/witkovsky/CharFunTool/blob/master/CF_Repository/cf_ChiSquare.m.

[1468] V. Witkovský. *Noncentral F-Distribution*. CharFunTool: The characteristic functions toolbox, 2017. [Online; accessed 22-July-2024]. URL: https://github.com/witkovsky/CharFunTool/blob/master/CF_Repository/cf_FisherSnedecorNC.m.

[1469] V. Witkovský. *Pareto Distribution*. CharFunTool: The characteristic functions toolbox, 2017. [Online; accessed 22-July-2024]. URL: https://github.com/witkovsky/CharFunTool/blob/master/CF_Repository/cfX_Pareto.m.

[1470] V. Witkovský. *Rayleigh Distribution*. CharFunTool: The characteristic functions toolbox, 2017. [Online; accessed 22-July-2024]. URL: https://github.com/witkovsky/CharFunTool/blob/master/CF_Repository/cf_Rayleigh.m.

[1471] V. Witkovský. *Rectangular (Uniform) Distribution*. CharFunTool: The characteristic functions toolbox, 2017. [Online; accessed 22-July-2024]. URL: https://github.com/witkovsky/CharFunTool/blob/master/CF_Repository/cfS_Rectangular.m.

[1472] V. Witkovský. *Student's t-Distribution*. CharFunTool: The characteristic functions toolbox, 2017. [Online; accessed 22-July-2024]. URL: https://github.com/witkovsky/CharFunTool/blob/master/CF_Repository/cf_Student.m.

[1473] V. Witkovský. *Triangular Distribution*. CharFunTool: The characteristic functions toolbox, 2017. [Online; accessed 22-July-2024]. URL: https://github.com/witkovsky/CharFunTool/blob/master/CF_Repository/cfS_Triangular.m.

[1474] V. Witkovský. *Weibull distribution*. CharFunTool: The characteristic functions toolbox, 2017. [Online; accessed 22-July-2024]. URL: https://github.com/witkovsky/CharFunTool/blob/master/CF_Repository/cfX_Weibull.m.

[1475] V. Witkovský. *Binomial distribution*. CharFunTool: The characteristic functions toolbox, 2018. [Online; accessed 22-July-2024]. URL: https://github.com/witkovsky/CharFunTool/blob/master/CF_Repository/cfN_Binomial.m.

[1476] V. Witkovský. *Canonical Correlation: Noncentral Wilks' Lambda Distribution*. CharFunTool: The characteristic functions toolbox, 2018. [Online; accessed 22-July-2024]. URL: https://github.com/witkovsky/CharFunTool/blob/master/CF_Repository/cf_LogRV_WilksLambdaNC.m.

[1477] V. Witkovský. *Chi Distribution*. CharFunTool: The characteristic functions toolbox, 2018. [Online; accessed 22-July-2024]. URL: https://github.com/witkovsky/CharFunTool/blob/master/CF_Repository/cf_Chi.m.

[1478] V. Witkovský. *Geometric distribution*. CharFunTool: The characteristic functions toolbox, 2018. [Online; accessed 22-July-2024]. URL: https://github.com/witkovsky/CharFunTool/blob/master/CF_Repository/cfN_Geometric.m.

[1479] V. Witkovský. *Half-normal distribution*. CharFunTool: The characteristic functions toolbox, 2018. [Online; accessed 22-July-2024]. URL: https://https://github.com/witkovsky/CharFunTool/blob/master/CF_Repository/cf_HalfNormal.m.

[1480] V. Witkovský. *Maxwell Distribution*. CharFunTool: The characteristic functions toolbox, 2018. [Online; accessed 22-July-2024]. URL: https://github.com/witkovsky/CharFunTool/blob/master/CF_Repository/cf_MaxwellBoltzmann.m.

[1481] V. Witkovský. *Nakagami Distribution*. CharFunTool: The characteristic functions toolbox, 2018. [Online; accessed 22-July-2024]. URL: https://github.com/witkovsky/CharFunTool/blob/master/CF_Repository/cf_Nakagami.m.

[1482] V. Witkovský. *Negative Binomial distribution*. CharFunTool: The characteristic functions toolbox, 2018. [Online; accessed 22-July-2024]. URL: https://github.com/witkovsky/CharFunTool/blob/master/CF_Repository/cfN_NegativeBinomial.m.

[1483] V. Witkovský. *Noncentral Wilks' Lambda Distribution*. CharFunTool: The characteristic functions toolbox, 2018. [Online; accessed 22-July-2024]. URL: https://github.com/witkovsky/CharFunTool/blob/master/CF_Repository/cf_LogRV_WilksLambdaNC.m.

[1484] V. Witkovský. *Noncentral chi distribution*. CharFunTool: The characteristic functions toolbox, 2018. [Online; accessed 22-July-2024]. URL: https://github.com/witkovsky/CharFunTool/blob/master/CF_Repository/cf_ChiNC.m.

[1485] V. Witkovský. *Poisson distribution*. CharFunTool: The characteristic functions toolbox, 2018. [Online; accessed 22-July-2024]. URL: https://github.com/witkovsky/CharFunTool/blob/master/CF_Repository/cfN_Poisson.m.

[1486] V. Witkovský. *Rice distribution*. CharFunTool: The characteristic functions toolbox, 2018. [Online; accessed 22-July-2024]. URL: https://github.com/witkovsky/CharFunTool/blob/master/CF_Repository/cf_Rice.m.

[1487] V. Witkovský. *SkewNormal Distribution*. CharFunTool: The characteristic functions toolbox, 2018. [Online; accessed 22-July-2024]. URL: https://github.com/witkovsky/CharFunTool/blob/master/CF_Repository/cf_SkewNormal.m.

[1488] V. Witkovský. *Test for Equality of Means*. CharFunTool: The characteristic functions toolbox, 2018. [Online; accessed 22-July-2024]. URL: https://github.com/witkovsky/CharFunTool/blob/master/CF_Repository/cfTest_EqualityMeans.m.

[1489] V. Witkovský. *Wilks' Lambda Distribution*. CharFunTool: The characteristic functions toolbox, 2018. [Online; accessed 22-July-2024]. URL: https://github.com/witkovsky/CharFunTool/blob/master/CF_Repository/cf_LogRV_WilksLambda.m.

[1490] Y. Yin. *Multiple Hypothesis Testing and Multiple Outlier Identification Methods*. Thesis. University of Saskatchewan, 2010. Available as https://harvest.usask.ca/server/api/core/bitstreams/30ee94cc-80ae-4939-8362-53b746a319a7/content.

[1491] Y. Yu. The shape of noncentral chi-square density. 2011. Available as https://arxiv.org/pdf/1106.5241.

[1492] H. Zakerzadeh and A. Dolati. Generalized lindley distribution. *Journal of Mathematical Extension*, 3(2):13–25, 2009.

[1493] Z. Zhang. An improvement to the brent's method. *IJEA*, 2:2–26, 2011. Available at: https://www.cscjournals.org/manuscript/Journals/IJEA/Volume2/Issue1/IJEA-7.pdf.

[1494] H. Zimmermann. Exact calculation of permutational distributions for two dependent samples. *Biometrical Journal*, 27:349–352, 1985.

[1495] H. Zimmermann. Exact calculation of permutational distributions for two independent samples. *Biometrical Journal*, 27:431–434, 1985.

[1496] Kaveh R. Ghazi and Vincent Lefèvre and Philippe Théveny and Paul Zimmermann. Why and how to use arbitrary precision. *Computing in Science and Engineering*, 12(3):62–65, 2010. Preprint available at http://citeseerx.ist.psu.edu/viewdoc/download?doi=10.1.1.212.6321&rep=rep1&type=pdf.

[1497] W. Hofschuster and W. Krämer. C-xsc 2.0: a c++ library for extended scientific computing. In R. Alt, A. Frommer, R.B. Kearfott, and W. Luther, editors, *Numerical Software with Result Verification, Lecture notes in Computer Science*, pages 15–35. Springer-Verlag, Heidelberg, 2004.

INDEX

A

abs() (*ctx method*), 245
acos() (*ctx method*), 344
acos1m() (*math53 method*), 2278
acosd() (*math53 method*), 2276
acosh() (*ctx method*), 357
acosh1p() (*math53 method*), 2281
acot() (*ctx method*), 349
acotc() (*ctx method*), 2351
acotd() (*math53 method*), 2278
acoth() (*ctx method*), 361
acothc() (*cmathc53 method*), 2352
acsc() (*ctx method*), 351
acsch() (*ctx method*), 365
AdamsBashforthMoultonConst() (*ctxboost method*), 960
add() (*npm method*), 1243
agm() (*ctx method*), 392
airy_ai() (*ctx method*), 1493
airy_ai_prime() (*ctx method*), 1497
airy_ai_zero() (*ctx method*), 1499
airy_bi() (*ctx method*), 1495
airy_bi_prime() (*ctx method*), 1498
airy_bi_zero() (*ctx method*), 1500
all() (*npm method*), 1259
anger_j() (*ctx method*), 1603
any() (*npm method*), 1259
apery (*ctx property*), 241
append() (*npm method*), 1220
arange() (*npm method*), 1183
arccl() (*math53 method*), 2308
arcgd() (*math53 method*), 2282
archav() (*math53 method*), 2278
arcsine_cdf() (*math53 method*), 415
arcsine_pdf() (*math53 method*), 415
arcsine_qtf() (*math53 method*), 415
arcsl() (*math53 method*), 2307
argmax() (*npm method*), 1230
argmin() (*npm method*), 1230
argsort() (*npm method*), 1228
argwhere() (*npm method*), 1231
array() (*npm method*), 1173
array_equal() (*npm method*), 1261
array_equiv() (*npm method*), 1262
array_split() (*npm method*), 1214
asanyarray() (*npm method*), 1175
asarray() (*npm method*), 1174
asec() (*ctx method*), 353
asech() (*ctx method*), 363
asin() (*ctx method*), 342
asind() (*math53 method*), 2276
asinh() (*ctx method*), 355
atan() (*ctx method*), 346
atan2() (*ctx method*), 348
atand() (*math53 method*), 2277
atanh() (*ctx method*), 359
atleast_1d() (*npm method*), 1205
atleast_2d() (*npm method*), 1205
atleast_3d() (*npm method*), 1205
average() (*npm method*), 1247

B

barnes_g() (*ctx method*), 1431
bateman_g() (*math53 method*), 2312
bernoulli() (*ctx method*), 1425
bernoulli_cdf() (*math53 method*), 825
bernoulli_pmf() (*math53 method*), 825
bernoulli_qtf() (*math53 method*), 825
bernpoly() (*ctx method*), 1426
bessel_i0() (*math53 method*), 2325
bessel_i0_int() (*math53 method*), 2328
bessel_i0e() (*math53 method*), 2326
bessel_i1() (*math53 method*), 2325
bessel_i1e() (*math53 method*), 2327
bessel_in() (*math53 method*), 2325
bessel_iv() (*ctx method*), 1469
bessel_iv_prime() (*ctx method*), 1473
bessel_j0() (*math53 method*), 2322
bessel_j0_int() (*math53 method*), 2328
bessel_j1() (*math53 method*), 2322
bessel_jn() (*math53 method*), 2322
bessel_jv() (*ctx method*), 1461
bessel_jv_prime() (*ctx method*), 1465
bessel_jv_zero() (*ctx method*), 1467
bessel_k0() (*math53 method*), 2325

bessel_k0_int() (*math53 method*), 2328
bessel_k0e() (*math53 method*), 2327
bessel_k1() (*math53 method*), 2326
bessel_k1e() (*math53 method*), 2327
bessel_kn() (*math53 method*), 2326
bessel_kv() (*ctx method*), 1471
bessel_kv_prime() (*ctx method*), 1474
bessel_lambda() (*math53 method*), 2288
bessel_y0() (*math53 method*), 2323
bessel_y0_int() (*math53 method*), 2328
bessel_y1() (*math53 method*), 2323
bessel_yn() (*math53 method*), 2323
bessel_yv() (*ctx method*), 1463
bessel_yv_prime() (*ctx method*), 1466
bessel_yv_zero() (*ctx method*), 1468
besselpoly() (*ctx method*), 1487
besseltheta() (*ctx method*), 1488
beta() (*ctx method*), 386
beta_cdf() (*math53 method*), 595
beta_davis_qtf() (*ctx method*), 1666
beta_lower() (*ctx method*), 1580
beta_nc_benton_cdf_sf() (*ctx method*), 1637
beta_nc_cdf() (*math53 method*), 654
beta_nc_pdf() (*math53 method*), 654
beta_nc_qtf() (*math53 method*), 654
beta_nc_seber_cdf() (*ctx method*), 1628
beta_nc_spa() (*ctx method*), 672
beta_nc_spa_inv() (*ctx method*), 672
beta_pdf() (*math53 method*), 595
beta_peizer_cdf_sf_pdf() (*ctx method*), 1634
beta_prod_spa() (*ctx method*), 737
beta_prod_spa_inv() (*ctx method*), 737
beta_product_bd() (*ctx method*), 737
beta_product_bd_cdf_old() (*ctx method*), 737
beta_product_bd_inv() (*ctx method*), 737
beta_product_ecf() (*ctx method*), 733
beta_product_ecf_inv() (*ctx method*), 733
beta_product_mu3_cdf() (*ctx method*), 1689
beta_product_mu3_qtf() (*ctx method*), 1689
beta_qtf() (*math53 method*), 595
beta_recurrence() (*ctx method*), 598
beta_seber_cdf() (*ctx method*), 1626
beta_upper() (*ctx method*), 1584
BFGS() (*ctxboost method*), 1015
bfgs_c() (*ctx method*), 918
binomial() (*ctx method*), 388
binomial_cdf() (*math53 method*), 839
binomial_ecf() (*ctx method*), 843
binomial_ecf_inv() (*ctx method*), 843
binomial_fm_pmf() (*ctx method*), 1642
binomial_ft() (*ctx method*), 843
binomial_pmf() (*math53 method*), 839
binomial_pmf_vector() (*ctx method*), 1655
binomial_qtf() (*math53 method*), 839
binomial_spa() (*ctx method*), 843
binomial_spa_inv() (*ctx method*), 843
bisection() (*ctx method*), 911
block() (*npm method*), 1210
bose_einstein() (*ctx method*), 1412
box_cov_bd() (*ctx method*), 771
box_cov_bd_inv() (*ctx method*), 771
box_davis_ecf() (*ctx method*), 771
box_davis_ecf_inv() (*ctx method*), 771
box_davis_expansion() (*ctx method*), 980
box_davis_expansion_inv() (*ctx method*), 981
box_means_cov_bd() (*ctx method*), 776
box_means_cov_bd_inv() (*ctx method*), 776
box_spa() (*ctx method*), 766
box_spa_inv() (*ctx method*), 766
BracketRoot() (*ctxboost method*), 906
brent() (*ctx method*), 915
BrentMinimum() (*ctx method*), 910
bring() (*math53 method*), 2270
broadcast_arrays() (*npm method*), 1206
broadcast_to() (*npm method*), 1206
BulirschStoerAdaptive() (*ctxboost method*), 964
BulirschStoerDenseOutput() (*ctxboost method*), 966

C

c_he_tridiag_0(), 1311
c_x() (*dist_amoroso method*), 577
c_x() (*dist_arcsine method*), 417
c_x() (*dist_bennett method*), 860
c_x() (*dist_beta method*), 597
c_x() (*dist_beta_nc_type_I method*), 656
c_x() (*dist_beta_prime method*), 613
c_x() (*dist_beta_product method*), 735
c_x() (*dist_binomial method*), 841
c_x() (*dist_birnb_saunders method*), 517
c_x() (*dist_box_cov method*), 768
c_x() (*dist_box_mvn method*), 773
c_x() (*dist_box_nsame_cov method*), 764
c_x() (*dist_cauchy method*), 421
c_x() (*dist_chi method*), 549
c_x() (*dist_chi_nc method*), 660
c_x() (*dist_chi_squared method*), 553
c_x() (*dist_chi_squared_nc method*), 642
c_x() (*dist_dagum method*), 467
c_x() (*dist_dunnett1_t method*), 713
c_x() (*dist_dunnett2_t method*), 716
c_x() (*dist_emg method*), 521
c_x() (*dist_exponential method*), 424
c_x() (*dist_feller_pareto method*), 628
c_x() (*dist_fisher_f method*), 602
c_x() (*dist_fisher_f_2nc method*), 686
c_x() (*dist_fisher_f_nc method*), 651
c_x() (*dist_fisher_r2_type_I method*), 674
c_x() (*dist_fisher_z method*), 631

c_x() (*dist_fisk method*), 470
c_x() (*dist_folded_normal method*), 524
c_x() (*dist_frechet method*), 473
c_x() (*dist_friedman method*), 890
c_x() (*dist_gamma method*), 558
c_x() (*dist_gen_beta_exp method*), 625
c_x() (*dist_genbeta1 method*), 616
c_x() (*dist_genbeta2 method*), 619
c_x() (*dist_genlogistic method*), 622
c_x() (*dist_genpareto method*), 479
c_x() (*dist_geometric method*), 831
c_x() (*dist_gev method*), 477
c_x() (*dist_gompertz method*), 482
c_x() (*dist_gumbel method*), 428
c_x() (*dist_half_normal method*), 527
c_x() (*dist_halperin_t method*), 722
c_x() (*dist_hotelling_t2 method*), 792
c_x() (*dist_hyperexponential method*), 432
c_x() (*dist_hypergeometric method*), 851
c_x() (*dist_hypoexponential method*), 583
c_x() (*dist_invchisquared method*), 562
c_x() (*dist_invgamma method*), 566
c_x() (*dist_johnson_sb method*), 530
c_x() (*dist_johnson_su method*), 533
c_x() (*dist_jterpsta_s method*), 880
c_x() (*dist_kendall_tau method*), 875
c_x() (*dist_kruskal_wallis method*), 893
c_x() (*dist_kumaraswamy method*), 436
c_x() (*dist_landau method*), 809
c_x() (*dist_laplace method*), 440
c_x() (*dist_levy method*), 496
c_x() (*dist_lindley method*), 587
c_x() (*dist_logistic method*), 444
c_x() (*dist_lognormal method*), 499
c_x() (*dist_logrv_beta method*), 610
c_x() (*dist_logrv_beta_sum method*), 731
c_x() (*dist_logrv_chisquared method*), 580
c_x() (*dist_lomax method*), 485
c_x() (*dist_lrt_s0 method*), 778
c_x() (*dist_lrt_x0_s0 method*), 782
c_x() (*dist_mann_whitney_u method*), 864
c_x() (*dist_mann_whitney_u_lehmann method*), 868
c_x() (*dist_mann_whitney_u_milton method*), 871
c_x() (*dist_mauchley method*), 760
c_x() (*dist_maxwell method*), 570
c_x() (*dist_moyal method*), 503
c_x() (*dist_nair_t method*), 719
c_x() (*dist_nakagami method*), 574
c_x() (*dist_negbinom method*), 846
c_x() (*dist_nelson_h method*), 725
c_x() (*dist_nmax_0 method*), 536
c_x() (*dist_nmax_rho method*), 692
c_x() (*dist_nmax_rhoij method*), 698
c_x() (*dist_nmm_0 method*), 539
c_x() (*dist_nmm_rho method*), 695
c_x() (*dist_nmm_rhoij method*), 701
c_x() (*dist_normal method*), 507
c_x() (*dist_normal_range method*), 704
c_x() (*dist_page_l method*), 884
c_x() (*dist_page_l_nc_milton method*), 887
c_x() (*dist_pareto method*), 448
c_x() (*dist_pearson_rho method*), 638
c_x() (*dist_pearson_rho_nc method*), 666
c_x() (*dist_pillai_v method*), 789
c_x() (*dist_poisson method*), 836
c_x() (*dist_rayleigh method*), 452
c_x() (*dist_rice method*), 663
c_x() (*dist_roy method*), 786
c_x() (*dist_sasnormal method*), 542
c_x() (*dist_shifted_gompertz method*), 488
c_x() (*dist_singh_maddala method*), 491
c_x() (*dist_skewnormal method*), 511
c_x() (*dist_skewt method*), 635
c_x() (*dist_smax method*), 707
c_x() (*dist_smm method*), 710
c_x() (*dist_stacy method*), 593
c_x() (*dist_student_t method*), 607
c_x() (*dist_student_t_2nc method*), 683
c_x() (*dist_student_t_nc method*), 647
c_x() (*dist_studentized_range method*), 728
c_x() (*dist_triangular method*), 456
c_x() (*dist_truncated_normal method*), 545
c_x() (*dist_uniform method*), 460
c_x() (*dist_wald method*), 515
c_x() (*dist_weibull method*), 464
c_x() (*dist_wilcoxon method*), 856
c_x() (*dist_wilks_cs method*), 744
c_x() (*dist_wilks_iblocks method*), 756
c_x() (*dist_wilks_ip method*), 752
c_x() (*dist_wilks_lambda method*), 740
c_x() (*dist_wilks_lambda_corr method*), 799
c_x() (*dist_wilks_lambda_glm method*), 795
c_x() (*dist_wilks_lcm method*), 748
c_x() (*rv_base method*), 406
c_x() (*skewexponpower method*), 590
c_y() (*dist_logrv_beta_nc_type_II method*), 670
c_y() (*dist_logrv_fisher_1mr2 method*), 679
CashKarpAdaptive() (*ctxboost method*), 961
CashKarpConst() (*ctxboost method*), 957
catalan (*ctx property*), 242
catalan_c() (*math53 method*), 2287
cauchy_cdf() (*math53 method*), 419
cauchy_pdf() (*math53 method*), 419
cauchy_qtf() (*math53 method*), 419
cbrt() (*ctx method*), 262
cdf() (*dist_amoroso method*), 576
cdf() (*dist_arcsine method*), 416
cdf() (*dist_bennett method*), 859

cdf() (*dist_bernoulli method*), 826
cdf() (*dist_beta method*), 596
cdf() (*dist_beta_nc_type_I method*), 655
cdf() (*dist_beta_prime method*), 612
cdf() (*dist_beta_product method*), 734
cdf() (*dist_binomial method*), 840
cdf() (*dist_birnb_saunders method*), 516
cdf() (*dist_box_cov method*), 767
cdf() (*dist_box_mvn method*), 772
cdf() (*dist_box_nsame_cov method*), 763
cdf() (*dist_cauchy method*), 420
cdf() (*dist_chi method*), 548
cdf() (*dist_chi_nc method*), 659
cdf() (*dist_chi_squared method*), 552
cdf() (*dist_chi_squared_nc method*), 641
cdf() (*dist_dagum method*), 466
cdf() (*dist_dunnett1_t method*), 712
cdf() (*dist_dunnett2_t method*), 715
cdf() (*dist_emg method*), 520
cdf() (*dist_exponential method*), 423
cdf() (*dist_feller_pareto method*), 627
cdf() (*dist_fisher_f method*), 601
cdf() (*dist_fisher_f_2nc method*), 685
cdf() (*dist_fisher_f_nc method*), 650
cdf() (*dist_fisher_r2_type_I method*), 673
cdf() (*dist_fisher_z method*), 630
cdf() (*dist_fisk method*), 469
cdf() (*dist_folded_normal method*), 523
cdf() (*dist_frechet method*), 472
cdf() (*dist_friedman method*), 889
cdf() (*dist_gamma method*), 557
cdf() (*dist_gen_beta_exp method*), 624
cdf() (*dist_genbeta1 method*), 615
cdf() (*dist_genbeta2 method*), 618
cdf() (*dist_genlogistic method*), 621
cdf() (*dist_genpareto method*), 478
cdf() (*dist_geometric method*), 830
cdf() (*dist_gev method*), 475
cdf() (*dist_gompertz method*), 481
cdf() (*dist_gumbel method*), 427
cdf() (*dist_half_normal method*), 526
cdf() (*dist_halperin_t method*), 721
cdf() (*dist_holtsmark method*), 811
cdf() (*dist_hotelling_t2 method*), 791
cdf() (*dist_hyperexponential method*), 431
cdf() (*dist_hypergeometric method*), 850
cdf() (*dist_hypoexponential method*), 582
cdf() (*dist_invchisquared method*), 561
cdf() (*dist_invgamma method*), 565
cdf() (*dist_johnson_sb method*), 529
cdf() (*dist_johnson_su method*), 532
cdf() (*dist_jterpsta_s method*), 878
cdf() (*dist_kendall_tau method*), 873
cdf() (*dist_kolmogorov_smirnov method*), 803
cdf() (*dist_kruskal_wallis method*), 892
cdf() (*dist_kumaraswamy method*), 435
cdf() (*dist_landau method*), 808
cdf() (*dist_laplace method*), 439
cdf() (*dist_levy method*), 495
cdf() (*dist_lindley method*), 586
cdf() (*dist_logistic method*), 443
cdf() (*dist_lognormal method*), 498
cdf() (*dist_logrv_beta method*), 609
cdf() (*dist_logrv_beta_nc_type_II method*), 669
cdf() (*dist_logrv_beta_sum method*), 730
cdf() (*dist_logrv_chisquared method*), 579
cdf() (*dist_logrv_fisher_1mr2 method*), 678
cdf() (*dist_lomax method*), 484
cdf() (*dist_lrt_s0 method*), 777
cdf() (*dist_lrt_x0_s0 method*), 781
cdf() (*dist_mann_whitney_u method*), 862
cdf() (*dist_mann_whitney_u_lehmann method*), 867
cdf() (*dist_mann_whitney_u_milton method*), 870
cdf() (*dist_mapairy method*), 816
cdf() (*dist_mauchley method*), 759
cdf() (*dist_maxwell method*), 569
cdf() (*dist_moyal method*), 502
cdf() (*dist_nair_t method*), 718
cdf() (*dist_nakagami method*), 573
cdf() (*dist_negbinom method*), 845
cdf() (*dist_nelson_h method*), 724
cdf() (*dist_nmax_0 method*), 535
cdf() (*dist_nmax_rho method*), 691
cdf() (*dist_nmax_rhoij method*), 697
cdf() (*dist_nmm_0 method*), 538
cdf() (*dist_nmm_rho method*), 694
cdf() (*dist_nmm_rhoij method*), 700
cdf() (*dist_normal method*), 506
cdf() (*dist_normal_range method*), 703
cdf() (*dist_page_l method*), 883
cdf() (*dist_page_l_nc_milton method*), 886
cdf() (*dist_pareto method*), 447
cdf() (*dist_pearson_rho method*), 637
cdf() (*dist_pearson_rho_nc method*), 665
cdf() (*dist_pillai_v method*), 788
cdf() (*dist_poisson method*), 835
cdf() (*dist_rayleigh method*), 451
cdf() (*dist_rice method*), 662
cdf() (*dist_roy method*), 785
cdf() (*dist_sasnormal method*), 541
cdf() (*dist_saspoint5 method*), 821
cdf() (*dist_shifted_gompertz method*), 487
cdf() (*dist_singh_maddala method*), 490
cdf() (*dist_skewnormal method*), 510
cdf() (*dist_skewt method*), 634
cdf() (*dist_smax method*), 706
cdf() (*dist_smm method*), 709
cdf() (*dist_stacy method*), 592

cdf() (*dist_student_t method*), 606
cdf() (*dist_student_t_2nc method*), 682
cdf() (*dist_student_t_nc method*), 646
cdf() (*dist_studentized_range method*), 727
cdf() (*dist_triangular method*), 455
cdf() (*dist_truncated_normal method*), 544
cdf() (*dist_uniform method*), 459
cdf() (*dist_wald method*), 514
cdf() (*dist_weibull method*), 463
cdf() (*dist_wilcoxon method*), 854
cdf() (*dist_wilks_cs method*), 743
cdf() (*dist_wilks_iblocks method*), 755
cdf() (*dist_wilks_ip method*), 751
cdf() (*dist_wilks_lambda method*), 739
cdf() (*dist_wilks_lambda_corr method*), 798
cdf() (*dist_wilks_lambda_glm method*), 794
cdf() (*dist_wilks_lcm method*), 747
cdf() (*rv_base method*), 401
cdf() (*skewexponpower method*), 589
cdf_from_cf_continuous() (*ctx method*), 1610
cdf_from_cf_continuous_boost() (*ctx method*), 934
cdf_from_cf_lattice() (*ctx method*), 1612
cdf_from_pdf() (*ctx method*), 1610
cdf_from_pmf() (*ctx method*), 1610
ceil() (*ctx method*), 220
ceil() (*npm method*), 1265
cel() (*math53 method*), 2294
cel1() (*math53 method*), 2293
cel2() (*math53 method*), 2293
centered() (*mat method*), 1293
central_moments() (*rv_base method*), 408
centralmoments_from_cumulants() (*ctx method*), 1621
centralmoments_from_factorialmoments() (*ctx method*), 1621
centralmoments_from_rawmoments() (*ctx method*), 1621
cf_from_rawmoments() (*ctx method*), 1614
cgf_from_cf() (*ctx method*), 1616
cgf_from_cumulants() (*ctx method*), 1616
cgf_from_mgf() (*ctx method*), 1616
cgf_from_pgf() (*ctx method*), 1616
chebyfit() (*ctx method*), 983
chebyshev_t() (*ctx method*), 1566
chebyshev_u() (*ctx method*), 1567
chebyshev_v() (*ctx method*), 1568
chebyshev_w() (*ctx method*), 1569
chf() (*dist_bernoulli method*), 826
chf() (*dist_holtsmark method*), 811
chf() (*dist_kolmogorov_smirnov method*), 803
chf() (*dist_mapairy method*), 816
chf() (*dist_saspoint5 method*), 821
chf() (*rv_continuous method*), 402
chi2_cdf() (*math53 method*), 551
chi2_cohen_cdf() (*ctx method*), 1624
chi2_nc_benton_cdf_sf() (*ctx method*), 1635
chi2_nc_canal_qtf() (*ctx method*), 1664
chi2_nc_cdf() (*math53 method*), 640
chi2_nc_cohen_cdf() (*ctx method*), 1626
chi2_nc_mu2_cdf() (*ctx method*), 1677
chi2_nc_mu2_qtf() (*ctx method*), 1677
chi2_nc_pdf() (*math53 method*), 640
chi2_nc_penev_cdf() (*ctx method*), 1664
chi2_nc_qtf() (*math53 method*), 640
chi2_nc_wb_cl() (*ctx method*), 1677
chi2_pdf() (*math53 method*), 551
chi2_qtf() (*math53 method*), 551
chi2_variance_1sample_ci() (*ctx method*), 2414
chi2_variance_1sample_power() (*ctx method*), 2415
chi2_variance_1sample_samplesize() (*ctx method*), 2416
chi2_variance_1sample_test() (*ctx method*), 2413
chi_cdf() (*math53 method*), 547
chi_pdf() (*math53 method*), 547
chi_qtf() (*math53 method*), 547
chi_squared_ecf() (*ctx method*), 554
chi_squared_ecf_inv() (*ctx method*), 554
chi_squared_gp() (*ctx method*), 554
chi_squared_nc_ecf() (*ctx method*), 644
chi_squared_nc_ecf_inv() (*ctx method*), 644
chi_squared_nc_gp() (*ctx method*), 644
chi_squared_nc_quad_cdf() (*ctx method*), 1648
chi_squared_nc_quad_cdf_verified() (*ctx method*), 1652
chi_squared_nc_recurrence() (*ctx method*), 643
chi_squared_nc_spa() (*ctx method*), 644
chi_squared_nc_spa_inv() (*ctx method*), 644
chi_squared_recurrence() (*ctx method*), 554
chi_squared_spa() (*ctx method*), 554
chi_squared_spa_inv() (*ctx method*), 555
cholesky() (*ctx method*), 1299
cholesky_solve() (*ctx method*), 1300
cin() (*math53 method*), 2344
cinh() (*math53 method*), 2344
clausen2() (*ctx method*), 1410
clausen_cos() (*ctx method*), 1408
clausen_sin() (*ctx method*), 1406
CMAes() (*ctxboost method*), 1013
cochran_s_pmf_vector() (*ctx method*), 1662
cochran_s_pmf_vector() (*math53lib method*), 2406
cohen_alt() (*ctx method*), 1002
column_stack() (*npm method*), 1213
compound_si() (*ctx method*), 2274
comprel() (*ctx method*), 2274
concatenate() (*npm method*), 1209
cond() (*ctx method*), 1301
conj() (*ctx method*), 253
conj_grad_c() (*ctx method*), 918
ConjugateGradientDescent() (*ctxboost method*), 1021
convolve() (*npm method*), 1257
copysign() (*ctx method*), 224
copyto() (*npm method*), 1199

cornish_fisher() (*ctx method*), 977
correlation() (*mat method*), 1296
cos() (*ctx method*), 306
cos_integral() (*ctx method*), 1561
cosd() (*math53 method*), 2276
cosh() (*ctx method*), 331
cosh_integral() (*ctx method*), 1557
coshm1() (*math53 method*), 2281
cosint() (*math53 method*), 2279
coslemn() (*math53 method*), 2307
cospi() (*ctx method*), 319
cot() (*ctx method*), 310
cotd() (*math53 method*), 2277
coth() (*ctx method*), 335
cotpi() (*ctx method*), 322
coulomb_cl() (*math53 method*), 2336
coulomb_f() (*ctx method*), 1525
coulomb_f_fprime() (*math53 method*), 2336
coulomb_g() (*ctx method*), 1526
coulomb_g_gprime() (*math53 method*), 2337
coulomb_hminus() (*ctx method*), 1528
coulomb_hplus() (*ctx method*), 1527
coulomb_sl() (*math53 method*), 2336
covariance_matrix() (*mat method*), 1295
covers() (*math53 method*), 2279
csc() (*ctx method*), 312
csch() (*ctx method*), 337
cscpi() (*ctx method*), 324
ctx.dist_amoroso (*built-in class*), 576
ctx.dist_arcsine (*built-in class*), 415
ctx.dist_bennett (*built-in class*), 859
ctx.dist_beta (*built-in class*), 595
ctx.dist_beta_nc_type_I (*built-in class*), 655
ctx.dist_beta_prime (*built-in class*), 612
ctx.dist_beta_product (*built-in class*), 734
ctx.dist_binomial (*built-in class*), 839
ctx.dist_birnb_saunders (*built-in class*), 516
ctx.dist_box_cov (*built-in class*), 767
ctx.dist_box_mvn (*built-in class*), 772
ctx.dist_box_nsame_cov (*built-in class*), 763
ctx.dist_cauchy (*built-in class*), 419
ctx.dist_chi (*built-in class*), 547
ctx.dist_chi2 (*built-in class*), 551
ctx.dist_chi2_nc (*built-in class*), 641
ctx.dist_chi_nc (*built-in class*), 659
ctx.dist_dagum (*built-in class*), 466
ctx.dist_dunnett1_t (*built-in class*), 712
ctx.dist_dunnett2_t (*built-in class*), 715
ctx.dist_emg (*built-in class*), 520
ctx.dist_exponential (*built-in class*), 422
ctx.dist_feller_pareto (*built-in class*), 627
ctx.dist_fisher_f (*built-in class*), 600
ctx.dist_fisher_f_2nc (*built-in class*), 685
ctx.dist_fisher_f_nc (*built-in class*), 650
ctx.dist_fisher_r2_type_I (*built-in class*), 673
ctx.dist_fisher_z (*built-in class*), 630
ctx.dist_fisk (*built-in class*), 469
ctx.dist_folded_normal (*built-in class*), 523
ctx.dist_frechet (*built-in class*), 472
ctx.dist_friedman (*built-in class*), 889
ctx.dist_gamma (*built-in class*), 556
ctx.dist_gen_beta_exp (*built-in class*), 624
ctx.dist_genbeta1 (*built-in class*), 615
ctx.dist_genbeta2 (*built-in class*), 618
ctx.dist_genlogistic (*built-in class*), 621
ctx.dist_genpareto (*built-in class*), 478
ctx.dist_geometric (*built-in class*), 830
ctx.dist_gev (*built-in class*), 475
ctx.dist_gompertz (*built-in class*), 481
ctx.dist_gumbel (*built-in class*), 426
ctx.dist_half_normal (*built-in class*), 526
ctx.dist_halperin_t (*built-in class*), 721
ctx.dist_hotelling_t2 (*built-in class*), 791
ctx.dist_hyperexponential (*built-in class*), 430
ctx.dist_hypergeometric (*built-in class*), 849
ctx.dist_hypoexponential (*built-in class*), 582
ctx.dist_inverse_chi2 (*built-in class*), 560
ctx.dist_inverse_gamma (*built-in class*), 564
ctx.dist_johnson_sb (*built-in class*), 529
ctx.dist_johnson_su (*built-in class*), 532
ctx.dist_jterpsta_s (*built-in class*), 878
ctx.dist_kendall_tau (*built-in class*), 873
ctx.dist_kruskal_wallis (*built-in class*), 892
ctx.dist_kumaraswamy (*built-in class*), 434
ctx.dist_landau (*built-in class*), 807
ctx.dist_laplace (*built-in class*), 438
ctx.dist_levy (*built-in class*), 494
ctx.dist_lindley (*built-in class*), 586
ctx.dist_logistic (*built-in class*), 442
ctx.dist_lognormal (*built-in class*), 497
ctx.dist_logrv_beta (*built-in class*), 609
ctx.dist_logrv_beta_nc_type_II (*built-in class*), 669
ctx.dist_logrv_beta_sum (*built-in class*), 730
ctx.dist_logrv_chisquared (*built-in class*), 579
ctx.dist_logrv_fisher_1mr2 (*built-in class*), 678
ctx.dist_lomax (*built-in class*), 484
ctx.dist_lrt_s0 (*built-in class*), 776
ctx.dist_lrt_x0_s0 (*built-in class*), 781
ctx.dist_mann_whitney_u (*built-in class*), 862
ctx.dist_mann_whitney_u_lehmann (*built-in class*), 867
ctx.dist_mann_whitney_u_milton (*built-in class*), 870
ctx.dist_mauchley (*built-in class*), 759
ctx.dist_maxwell (*built-in class*), 568
ctx.dist_moyal (*built-in class*), 501
ctx.dist_nair_t (*built-in class*), 718
ctx.dist_nakagami (*built-in class*), 572
ctx.dist_negbinom (*built-in class*), 844
ctx.dist_nelson_h (*built-in class*), 724

ctx.dist_nmax_0 (*built-in class*), 535
ctx.dist_nmax_rho (*built-in class*), 691
ctx.dist_nmax_rhoij (*built-in class*), 697
ctx.dist_nmm_0 (*built-in class*), 538
ctx.dist_nmm_rho (*built-in class*), 694
ctx.dist_nmm_rhoij (*built-in class*), 700
ctx.dist_normal (*built-in class*), 505
ctx.dist_normal_range (*built-in class*), 703
ctx.dist_page_l (*built-in class*), 883
ctx.dist_page_l_nc_milton (*built-in class*), 886
ctx.dist_pareto (*built-in class*), 446
ctx.dist_pearson_rho (*built-in class*), 637
ctx.dist_pearson_rho_nc (*built-in class*), 665
ctx.dist_pillai_v (*built-in class*), 788
ctx.dist_poisson (*built-in class*), 834
ctx.dist_rayleigh (*built-in class*), 450
ctx.dist_rice (*built-in class*), 662
ctx.dist_roy (*built-in class*), 785
ctx.dist_sasnormal (*built-in class*), 541
ctx.dist_shifted_gompertz (*built-in class*), 487
ctx.dist_singh_maddala (*built-in class*), 490
ctx.dist_skewnormal (*built-in class*), 509
ctx.dist_skewt (*built-in class*), 634
ctx.dist_smax (*built-in class*), 706
ctx.dist_smm (*built-in class*), 709
ctx.dist_stacy (*built-in class*), 592
ctx.dist_student_t (*built-in class*), 605
ctx.dist_student_t_2nc (*built-in class*), 682
ctx.dist_student_t_nc (*built-in class*), 646
ctx.dist_studentized_range (*built-in class*), 727
ctx.dist_triangular (*built-in class*), 455
ctx.dist_truncated_normal (*built-in class*), 544
ctx.dist_uniform (*built-in class*), 458
ctx.dist_wald (*built-in class*), 513
ctx.dist_weibull (*built-in class*), 462
ctx.dist_wilcoxon (*built-in class*), 854
ctx.dist_wilks_cs (*built-in class*), 743
ctx.dist_wilks_iblocks (*built-in class*), 755
ctx.dist_wilks_ip (*built-in class*), 751
ctx.dist_wilks_lambda (*built-in class*), 739
ctx.dist_wilks_lambda_corr (*built-in class*), 798
ctx.dist_wilks_lambda_glm (*built-in class*), 794
ctx.dist_wilks_lcm (*built-in class*), 747
ctx.skewexponpower (*built-in class*), 589
ctxlistcplx (*gui property*), 93
ctxlistreal (*gui property*), 93
cube() (*ctx method*), 291
cuberoot() (*cmath53 method*), 2350
cubic_equation() (*ctx method*), 2383
cubic_equation_monic() (*ctx method*), 2382
cubsolve() (*ctx method*), 899
cumprod() (*npm method*), 1235
cumsum() (*npm method*), 1235
cumulants() (*dist_amoroso method*), 578
cumulants() (*dist_arcsine method*), 418
cumulants() (*dist_bennett method*), 861
cumulants() (*dist_beta method*), 598
cumulants() (*dist_beta_nc_type_I method*), 657
cumulants() (*dist_beta_prime method*), 614
cumulants() (*dist_beta_product method*), 736
cumulants() (*dist_binomial method*), 842
cumulants() (*dist_birnb_saunders method*), 518
cumulants() (*dist_box_cov method*), 769
cumulants() (*dist_box_mvn method*), 774
cumulants() (*dist_box_nsame_cov method*), 765
cumulants() (*dist_cauchy method*), 421
cumulants() (*dist_chi method*), 550
cumulants() (*dist_chi_nc method*), 661
cumulants() (*dist_chi_squared method*), 554
cumulants() (*dist_chi_squared_nc method*), 643
cumulants() (*dist_dagum method*), 467
cumulants() (*dist_dunnett1_t method*), 714
cumulants() (*dist_dunnett2_t method*), 717
cumulants() (*dist_emg method*), 522
cumulants() (*dist_exponential method*), 425
cumulants() (*dist_feller_pareto method*), 629
cumulants() (*dist_fisher_f method*), 603
cumulants() (*dist_fisher_f_2nc method*), 687
cumulants() (*dist_fisher_f_nc method*), 652
cumulants() (*dist_fisher_r2_type_I method*), 675
cumulants() (*dist_fisher_z method*), 632
cumulants() (*dist_fisk method*), 470
cumulants() (*dist_folded_normal method*), 525
cumulants() (*dist_frechet method*), 473
cumulants() (*dist_friedman method*), 891
cumulants() (*dist_gamma method*), 559
cumulants() (*dist_gen_beta_exp method*), 626
cumulants() (*dist_genbeta1 method*), 617
cumulants() (*dist_genbeta2 method*), 620
cumulants() (*dist_genlogistic method*), 623
cumulants() (*dist_genpareto method*), 479
cumulants() (*dist_geometric method*), 832
cumulants() (*dist_gev method*), 477
cumulants() (*dist_gompertz method*), 483
cumulants() (*dist_gumbel method*), 429
cumulants() (*dist_half_normal method*), 528
cumulants() (*dist_halperin_t method*), 723
cumulants() (*dist_hotelling_t2 method*), 793
cumulants() (*dist_hyperexponential method*), 433
cumulants() (*dist_hypergeometric method*), 853
cumulants() (*dist_hypoexponential method*), 584
cumulants() (*dist_invchisquared method*), 563
cumulants() (*dist_invgamma method*), 566
cumulants() (*dist_johnson_sb method*), 531
cumulants() (*dist_johnson_su method*), 534
cumulants() (*dist_jterpsta_s method*), 881
cumulants() (*dist_kendall_tau method*), 876
cumulants() (*dist_kruskal_wallis method*), 894

cumulants() (*dist_kumaraswamy method*), 437
cumulants() (*dist_landau method*), 809
cumulants() (*dist_laplace method*), 441
cumulants() (*dist_levy method*), 496
cumulants() (*dist_lindley method*), 588
cumulants() (*dist_logistic method*), 445
cumulants() (*dist_lognormal method*), 499
cumulants() (*dist_logrv_beta method*), 611
cumulants() (*dist_logrv_beta_nc_type_II method*), 671
cumulants() (*dist_logrv_beta_sum method*), 732
cumulants() (*dist_logrv_chisquared method*), 581
cumulants() (*dist_logrv_fisher_1mr2 method*), 680
cumulants() (*dist_lomax method*), 485
cumulants() (*dist_lrt_s0 method*), 779
cumulants() (*dist_lrt_x0_s0 method*), 783
cumulants() (*dist_mann_whitney_u method*), 865
cumulants() (*dist_mann_whitney_u_lehmann method*), 869
cumulants() (*dist_mann_whitney_u_milton method*), 872
cumulants() (*dist_mauchley method*), 761
cumulants() (*dist_maxwell method*), 571
cumulants() (*dist_moyal method*), 504
cumulants() (*dist_nair_t method*), 720
cumulants() (*dist_nakagami method*), 575
cumulants() (*dist_negbinom method*), 848
cumulants() (*dist_nelson_h method*), 726
cumulants() (*dist_nmax_0 method*), 537
cumulants() (*dist_nmax_rho method*), 693
cumulants() (*dist_nmax_rhoij method*), 699
cumulants() (*dist_nmm_0 method*), 540
cumulants() (*dist_nmm_rho method*), 696
cumulants() (*dist_nmm_rhoij method*), 702
cumulants() (*dist_normal method*), 508
cumulants() (*dist_normal_range method*), 705
cumulants() (*dist_page_l method*), 885
cumulants() (*dist_page_l_nc_milton method*), 888
cumulants() (*dist_pareto method*), 449
cumulants() (*dist_pearson_rho method*), 639
cumulants() (*dist_pearson_rho_nc method*), 667
cumulants() (*dist_pillai_v method*), 790
cumulants() (*dist_poisson method*), 837
cumulants() (*dist_rayleigh method*), 453
cumulants() (*dist_rice method*), 664
cumulants() (*dist_roy method*), 787
cumulants() (*dist_sasnormal method*), 543
cumulants() (*dist_shifted_gompertz method*), 489
cumulants() (*dist_singh_maddala method*), 491
cumulants() (*dist_skewnormal method*), 512
cumulants() (*dist_skewt method*), 636
cumulants() (*dist_smax method*), 708
cumulants() (*dist_smm method*), 711
cumulants() (*dist_stacy method*), 594
cumulants() (*dist_student_t method*), 608
cumulants() (*dist_student_t_2nc method*), 684
cumulants() (*dist_student_t_nc method*), 648
cumulants() (*dist_studentized_range method*), 729
cumulants() (*dist_triangular method*), 457
cumulants() (*dist_truncated_normal method*), 546
cumulants() (*dist_uniform method*), 461
cumulants() (*dist_wald method*), 516
cumulants() (*dist_weibull method*), 465
cumulants() (*dist_wilcoxon method*), 857
cumulants() (*dist_wilks_cs method*), 745
cumulants() (*dist_wilks_iblocks method*), 757
cumulants() (*dist_wilks_ip method*), 753
cumulants() (*dist_wilks_lambda method*), 741
cumulants() (*dist_wilks_lambda_corr method*), 800
cumulants() (*dist_wilks_lambda_glm method*), 796
cumulants() (*dist_wilks_lcm method*), 749
cumulants() (*rv_base method*), 409
cumulants() (*skewexponpower method*), 591
cumulants_from_cdf() (*ctx method*), 1622
cumulants_from_centralmoments() (*ctx method*), 1622
cumulants_from_factorialmoments() (*ctx method*), 1622
cumulants_from_pmfvector(), 1622
cumulants_from_rawmoments() (*ctx method*), 1622
cylinder_d() (*ctx method*), 1531
cylinder_u() (*ctx method*), 1532
cylinder_v() (*ctx method*), 1533
cylinder_w() (*ctx method*), 1534

D

dawson() (*ctx method*), 1544
dawson2() (*math53 method*), 2339
debye() (*math53 method*), 2315
dedekind_eta() (*ctx method*), 1381
degree (*ctx property*), 238
delete() (*npm method*), 1219
deriv1_c() (*ctx method*), 967
deriv2_c() (*ctx method*), 967
det() (*ctx method*), 1300
diag() (*npm method*), 1187
diagflat() (*npm method*), 1190
diagonal() (*npm method*), 1189
diff() (*ctx method*), 968
diff() (*npm method*), 1236
difference() (*ctx method*), 970
differint() (*ctx method*), 972
diffs() (*ctx method*), 970
diffs_exp() (*ctx method*), 971
diffs_prod() (*ctx method*), 971
diffun() (*ctx method*), 970
digamma() (*ctx method*), 1396
dilog() (*ctx method*), 1404
dirichlet_beta() (*ctx method*), 1453
dirichlet_eta() (*ctx method*), 1449
dirichlet_eta_i() (*math53 method*), 2317
dirichlet_eta_m1() (*ctx method*), 1451
dirichlet_lambda() (*ctx method*), 1455

dist_bernoulli() (*CtxBoost method*), 826
dist_holtsmark() (*CtxBoost method*), 810
dist_kolmogorov_smirnov() (*CtxBoost method*), 802
dist_mapairy() (*CtxBoost method*), 816
dist_saspoint5() (*CtxBoost method*), 820
divide() (*npm method*), 1244
DormandPrince5Adaptive() (*ctxboost method*), 962
DormandPrince5Const() (*ctxboost method*), 958
DormandPrince5DenseOutput() (*ctxboost method*), 965
dot() (*npm method*), 1250
doublefactorial() (*ctx method*), 378
dsplit() (*npm method*), 1214
dstack() (*npm method*), 1212
dunn_sidak_qtf() (*ctx method*), 1681
Dunnett1Cdf() (*math53lib method*), 2398
Dunnett1Dist() (*math53lib method*), 2398
Dunnett1Pdf() (*math53lib method*), 2398
Dunnett1Qtf() (*math53lib method*), 2398
Dunnett2Cdf() (*math53lib method*), 2399
Dunnett2Dist() (*math53lib method*), 2399
Dunnett2Pdf() (*math53lib method*), 2399
Dunnett2Qtf() (*math53lib method*), 2399

E

e (*ctx property*), 240
edgeworth() (*ctx method*), 976
ediff1d() (*npm method*), 1237
egamma (*ctx property*), 241
ei_inv() (*math53 method*), 2345
eibeta() (*math53 method*), 2346
eig() (*ctx method*), 1312
eig_sort() (*ctx method*), 1313
eigh() (*ctx method*), 1309
eighe() (*ctx method*), 1308
eigsy() (*ctx method*), 1307
ein() (*math53 method*), 2344
einstein() (*math53 method*), 2271
einsum() (*npm method*), 1255
eisx2() (*math53 method*), 2345
el1() (*math53 method*), 2294
el2() (*math53 method*), 2294
el3() (*math53 method*), 2295
elliptic_b() (*math53 method*), 2291
elliptic_b_inc() (*math53 method*), 2291
elliptic_d() (*math53 method*), 2291
elliptic_d_inc() (*math53 method*), 2292
elliptic_e() (*ctx method*), 1334
elliptic_e_inc() (*ctx method*), 1339
elliptic_f() (*ctx method*), 1338
elliptic_k() (*ctx method*), 1333
elliptic_modular_delta() (*ctx.ctx method*), 1383
elliptic_modular_lambda() (*ctx.ctx method*), 1382
elliptic_modulus() (*math53 method*), 2289
elliptic_nome() (*math53 method*), 2289
elliptic_pi() (*ctx method*), 1336
elliptic_pi_inc() (*ctx method*), 1340
elliptic_rc() (*ctx method*), 1323
elliptic_rd() (*ctx method*), 1322
elliptic_rf() (*ctx method*), 1318
elliptic_rg() (*ctx method*), 1319
elliptic_rj() (*ctx method*), 1320
EllipticCE() (*math53 method*), 2297
EllipticCK() (*math53 method*), 2296
EllipticCPi() (*math53 method*), 2298
EllipticE() (*math53 method*), 2299
EllipticEC() (*math53 method*), 2297
EllipticECim() (*math53 method*), 2297
EllipticF() (*math53 method*), 2299
EllipticK() (*math53 method*), 2296
EllipticKim() (*math53 method*), 2296
EllipticPi() (*math53 method*), 2299
EllipticPiC() (*math53 method*), 2298
EllipticPiCim() (*math53 method*), 2298
entropy() (*rv_continuous method*), 411
entropy() (*rv_discrete method*), 413
epsilon() (*ctx method*), 234
equal() (*npm method*), 1263
erf() (*ctx method*), 1535
erf2() (*math53 method*), 2338
erf_inv() (*ctx method*), 1539
erfc() (*ctx method*), 1537
erfc_inv() (*ctx method*), 1540
erfcx() (*math53 method*), 2338
erfcx_inv() (*math53 method*), 2339
erfg() (*math53 method*), 2340
erfh() (*math53 method*), 2338
erfi() (*ctx method*), 1543
erfi_inv() (*math53 method*), 2339
erfq() (*math53 method*), 2338
euler_q() (*math53 method*), 2319
eulernum() (*ctx method*), 1428
eulerpoly() (*ctx method*), 1429
eval_cubic() (*ctx method*), 2383
eval_monic_cubic() (*ctx method*), 2382
eval_quadratic() (*ctx method*), 2381
eval_quartic() (*ctx method*), 2384
excess_kurtosis() (*rv_base method*), 405
exp() (*ctx method*), 266
exp10() (*ctx method*), 271
exp10m1() (*ctx method*), 276
exp2() (*ctx method*), 273
exp2m1() (*ctx method*), 277
exp_integral_e1() (*ctx method*), 1551
exp_integral_e1_scaled() (*math53 method*), 2345
exp_integral_ei() (*ctx method*), 1552
exp_integral_ei_scaled() (*math53 method*), 2345
exp_integral_en() (*ctx method*), 1558
expand_dims() (*npm method*), 1206

expint3() (*math53 method*), 2340
expj() (*ctx method*), 268
expjpi() (*ctx method*), 269
expm1() (*ctx method*), 274
expmx2h() (*math53 method*), 2270
expn() (*math53 method*), 2334
exponential_cdf() (*math53 method*), 422
exponential_pdf() (*math53 method*), 422
exponential_qtf() (*math53 method*), 422
exprel() (*math53 method*), 2270
expreln() (*math53 method*), 2335
ExpSinh() (*ctxboost method*), 932
expx2() (*math53 method*), 2271
eye() (*npm method*), 1167

F

fabs() (*ctx method*), 246
factorial() (*ctx method*), 376
factorial_moments_from_cumulants() (*ctx method*), 1618
factorial_moments_from_rawmoments() (*ctx method*), 1618
fadd() (*ctx method*), 1286
faddeeva() (*ctx method*), 1545
falling_factorial() (*ctx method*), 382
fdim() (*ctx method*), 228
fdiv() (*ctx method*), 1290
fdot() (*ctx method*), 1291
Fehlberg78Adaptive() (*ctxboost method*), 963
Fehlberg78Const() (*ctxboost method*), 959
fermi_dirac() (*ctx method*), 1414
fermi_dirac_i() (*math53 method*), 2313
fermi_dirac_m05() (*math53 method*), 2314
fermi_dirac_p05() (*math53 method*), 2314
fermi_dirac_p15() (*math53 method*), 2314
fermi_dirac_p25() (*math53 method*), 2314
fibfun() (*math53 method*), 2275
fibpoly() (*math53 method*), 2274
findroot() (*ctx method*), 911
fisher_f_cdf() (*math53 method*), 600
fisher_f_davis_qtf() (*ctx method*), 1666
fisher_f_nc2_cdf_recurrence() (*ctx method*), 688
fisher_f_nc2_ecf() (*ctx method*), 688
fisher_f_nc2_ecf_inv() (*ctx method*), 688
fisher_f_nc2_mu2_cdf() (*ctx method*), 1682
fisher_f_nc2_mu2_qtf() (*ctx method*), 1683
fisher_f_nc2_pdf_recurrence() (*ctx method*), 687
fisher_f_nc2_spa() (*ctx method*), 688
fisher_f_nc2_spa_inv() (*ctx method*), 689
fisher_f_nc_benton_cdf_sf() (*ctx method*), 1637
fisher_f_nc_cdf() (*math53 method*), 649
fisher_f_nc_cdf_recurrence() (*ctx method*), 653
fisher_f_nc_ecf() (*ctx method*), 653
fisher_f_nc_ecf_inv() (*ctx method*), 653
fisher_f_nc_mu2_cdf() (*ctx method*), 1681
fisher_f_nc_mu2_cl() (*ctx method*), 1682
fisher_f_nc_mu2_qtf() (*ctx method*), 1682
fisher_f_nc_pdf() (*math53 method*), 649
fisher_f_nc_pdf_recurrence() (*ctx method*), 652
fisher_f_nc_qtf() (*math53 method*), 649
fisher_f_nc_seber_cdf() (*ctx method*), 1627
fisher_f_pdf() (*math53 method*), 600
fisher_f_qtf() (*math53 method*), 600
fisher_f_seber_cdf() (*ctx method*), 1625
fisher_log1mr2_gp() (*ctx method*), 681
fisher_r2_gd1_cdf() (*ctx method*), 1630
fisher_r2_gd2_cdf() (*ctx method*), 1640
fisher_r2_lee_cdf() (*ctx method*), 1684
fisher_r2_lee_cl() (*ctx method*), 1684
fisher_r2_lee_mu3_cdf() (*ctx method*), 1699
fisher_r2_lee_qtf() (*ctx method*), 1684
fisher_r2_spa() (*ctx method*), 681
fisher_r2_spa_inv() (*ctx method*), 681
fisher_z_ecf() (*ctx method*), 633
fisher_z_ecf_inv() (*ctx method*), 633
fisher_z_spa() (*ctx method*), 633
fisher_z_spa_inv() (*ctx method*), 633
fitsint32() (*ctx method*), 216
fitsint64() (*ctx method*), 216
fix() (*npm method*), 1266
flat() (*ndarry method*), 1201
flatten() (*ndarry method*), 1202
flip() (*npm method*), 1223
fliplr() (*npm method*), 1223
flipud() (*npm method*), 1224
floor() (*ctx method*), 220
floor() (*npm method*), 1265
floor_divide() (*npm method*), 1245
fma() (*ctx method*), 201
fmax() (*ctx method*), 202
fmin() (*ctx method*), 202
fmod() (*ctx method*), 229
fmul() (*ctx method*), 1289
fneg() (*ctx method*), 1288
fourier() (*ctx method*), 984
fourierval() (*ctx method*), 985
fprod() (*ctx method*), 1291
frac() (*ctx method*), 232
fractionalpart() (*ctx method*), 232
fratio_variance_2csamples_ci() (*ctx method*), 2445
fratio_variance_2csamples_power() (*ctx method*), 2447
fratio_variance_2csamples_samplesize() (*ctx method*), 2449
fratio_variance_2csamples_test() (*ctx method*), 2443
fratio_variance_2isamples_ci() (*ctx method*), 2429
fratio_variance_2isamples_power() (*ctx method*), 2431
fratio_variance_2isamples_samplesize() (*ctx method*), 2433
fratio_variance_2isamples_test() (*ctx method*), 2427

frechet_pmf() (*ctx method*), 1641
fresnel_c() (*ctx method*), 1548
fresnel_f() (*math53 method*), 2341
fresnel_g() (*math53 method*), 2341
fresnel_s() (*ctx method*), 1546
frexp() (*ctx method*), 224
friedman_s_pmf_vector() (*ctx method*), 1662
friedman_s_pmf_vector() (*math53lib method*), 2406
fromfile() (*npm method*), 1176
fromfunction() (*npm method*), 1176
fromiter() (*npm method*), 1177
fromstring() (*npm method*), 1178
fsub() (*ctx method*), 1288
fsum() (*ctx method*), 1291
full() (*npm method*), 1170
full_like() (*npm method*), 1171

G

g_x() (*dist_bennett method*), 860
g_x() (*dist_binomial method*), 841
g_x() (*dist_hypergeometric method*), 851
g_x() (*dist_jterpsta_s method*), 879
g_x() (*dist_kendall_tau method*), 874
g_x() (*dist_mann_whitney_u method*), 863
g_x() (*dist_mann_whitney_u_milton method*), 871
g_x() (*dist_mann_whitney_u_normal method*), 868
g_x() (*dist_negbinom method*), 846
g_x() (*dist_poisson method*), 836
g_x() (*dist_wilcoxon method*), 855
gamma() (*ctx method*), 368
gamma1pm1() (*ctx method*), 369
gamma_canal_qtf() (*ctx method*), 1665
gamma_cdf() (*math53 method*), 556
gamma_delta_ratio() (*ctx method*), 384
gamma_inv() (*math53 method*), 2286
gamma_lower() (*ctx method*), 1520
gamma_p() (*ctx method*), 1517
gamma_p_inv() (*ctx method*), 1522
gamma_p_inva() (*ctx method*), 1523
gamma_p_prime() (*ctx method*), 1522
gamma_paris_cdf_sf() (*ctx method*), 1634
gamma_pdf() (*math53 method*), 556
gamma_peizer_cdf_sf_pdf() (*ctx method*), 1633
gamma_q() (*ctx method*), 1518
gamma_q_inv() (*ctx method*), 1523
gamma_q_inva() (*ctx method*), 1523
gamma_qtf() (*math53 method*), 556
gamma_ratio() (*ctx method*), 383
gamma_tricomi() (*math53 method*), 2334
gamma_upper() (*ctx method*), 1521
gammastar() (*math53 method*), 2287
gauss_quad_rules() (*ctx method*), 945
GaussKronrod() (*ctxboost method*), 929
GaussLegendre() (*ctxboost method*), 928
gd() (*math53 method*), 2282
gegenbauer_c() (*ctx method*), 1570
gei() (*math53 method*), 2346
genfromtxt() (*npm method*), 1181
geometric_cdf() (*math53 method*), 829
geometric_pmf() (*math53 method*), 829
geometric_qtf() (*math53 method*), 830
geomspace() (*npm method*), 1186
get_local_appdata() (*gui method*), 91
get_local_appdata_xlcalcnet() (*gui method*), 91
get_my_documents() (*gui method*), 91
glaisher (*ctx property*), 243
goodwin_staton() (*math53 method*), 2341
gradient() (*npm method*), 1237
gradient_c() (*ctx method*), 967
GradientDescent() (*ctxboost method*), 1019
greater() (*npm method*), 1262
greater_equal() (*npm method*), 1262
gumbel_cdf() (*math53 method*), 426
gumbel_pdf() (*math53 method*), 426
gumbel_qtf() (*math53 method*), 426

H

Halley() (*ctxboost method*), 908
halley_c() (*ctx method*), 917
HalperinCdf() (*math53lib method*), 2401
HalperinDist() (*math53lib method*), 2401
HalperinPdf() (*math53lib method*), 2401
HalperinQtf() (*math53lib method*), 2401
hankel_h1() (*ctx method*), 1489
hankel_h2() (*ctx method*), 1490
hardy_theta() (*mathc53 method*), 1443
hardy_z() (*mathc53 method*), 1445
harmonic() (*ctx method*), 1398
harmonic2() (*ctx method*), 1423
has_apm() (*gui method*), 92
has_gpm() (*gui method*), 92
has_xlcalcnet2() (*gui method*), 92
hav() (*math53 method*), 2278
hazard() (*rv_continuous method*), 402
hermite_h() (*ctx method*), 1515
hermite_he() (*ctx method*), 1516
hessenberg() (*ctx method*), 1313
heuman_lambda() (*math53 method*), 2292
hf() (*dist_bernoulli method*), 826
hf() (*dist_holtsmark method*), 811
hf() (*dist_kolmogorov_smirnov method*), 803
hf() (*dist_mapairy method*), 816
hf() (*dist_saspoint5 method*), 821
holtsmark_cdf() (*math53 method*), 810
holtsmark_pdf() (*math53 method*), 810
holtsmark_qtf() (*math53 method*), 810
hotelling_t2_bd() (*ctx method*), 793
hotelling_t2_bd_inv() (*ctx method*), 793

hotelling_t2_ecf() (*ctx method*), 793
hotelling_t2_ecf_inv() (*ctx method*), 793
hotelling_t2_glm_chi2_cdf() (*ctx method*), 1696
hotelling_t2_glm_mu2_cdf() (*ctx method*), 1700
hotelling_t2_ind_chi2_cdf() (*ctx method*), 1697
hotelling_t2_ind_mu2_cdf() (*ctx method*), 1700
hotelling_t2_mu3_cdf() (*ctx method*), 1687
hotelling_t2_mu3_qtf() (*ctx method*), 1687
hsplit() (*npm method*), 1215
hstack() (*npm method*), 1212
hurwitz_zeta() (*ctx method*), 1420
HyperbolicParaboloid() (*User method*), 2088
hyperexponential_cdf() (*math53 method*), 430
hyperexponential_pdf() (*math53 method*), 430
hyperexponential_qtf() (*math53 method*), 430
hyperfactorial() (*ctx method*), 1435
hyperg_0f1() (*ctx method*), 1458
hyperg_0f1r() (*ctx method*), 1460
hyperg_1f1() (*ctx method*), 1509
hyperg_1f1r() (*ctx method*), 1511
hyperg_1f2() (*ctx method*), 1593
hyperg_1f2r() (*ctx method*), 1594
hyperg_2f1() (*ctx method*), 1563
hyperg_2f1r() (*ctx method*), 1565
hyperg_u() (*ctx method*), 1512
hypergeo_ecf() (*ctx method*), 853
hypergeo_ecf_inv() (*ctx method*), 853
hypergeo_fm_pmf() (*ctx method*), 1642
hypergeo_ft() (*ctx method*), 843
hypergeo_nc_pmf_vector() (*ctx method*), 1656
hypergeo_spa() (*ctx method*), 853
hypergeo_spa_inv() (*ctx method*), 853
hypergeometric_cdf() (*math53 method*), 849
hypergeometric_pmf() (*math53 method*), 849
hypergeometric_pmf_vector() (*ctx method*), 1656
hypergeometric_qtf() (*math53 method*), 849
hypermat_1f1_butler() (*ctx method*), 1703
hypermat_2f1_butler() (*ctx method*), 1704
hypot() (*ctx method*), 295
hypot3() (*math53 method*), 2274

I

ibeta() (*ctx method*), 1581
ibeta_inv() (*ctx method*), 1587
ibeta_inva() (*ctx method*), 1589
ibeta_invb() (*ctx method*), 1591
ibeta_prime() (*ctx method*), 1583
ibetac() (*ctx method*), 1585
ibetac_inv() (*ctx method*), 1588
ibetac_inva() (*ctx method*), 1590
ibetac_invb() (*ctx method*), 1592
identity() (*npm method*), 1167
illinois() (*ctx method*), 913
ilogb() (*ctx method*), 226
imag() (*ctx method*), 250
improve_solution(), 1301
inerfc() (*math53 method*), 2340
inf() (*ctx method*), 205
info() (*gui method*), 92
inner() (*npm method*), 1251
insert() (*npm method*), 1219
intde() (*ctx method*), 924
intdei() (*ctx method*), 925
intdeo() (*ctx method*), 926
inverse() (*ctx method*), 1300
inverse_chi2_cdf() (*math53 method*), 560
inverse_chi2_pdf() (*math53 method*), 560
inverse_chi2_qtf() (*math53 method*), 560
inverse_gamma_cdf() (*math53 method*), 564
inverse_gamma_pdf() (*math53 method*), 564
inverse_gamma_qtf() (*math53 method*), 564
inverse_tan_integral() (*ctx method*), 1418
invertlaplace() (*ctx method*), 949
invlapcohen() (*ctx method*), 954
invlapdehoog() (*ctx method*), 953
invlapstehfest() (*ctx method*), 952
invlaptalbot() (*ctx method*), 951
isf() (*dist_amoroso method*), 577
isf() (*dist_arcsine method*), 417
isf() (*dist_bennett method*), 860
isf() (*dist_bernoulli method*), 826
isf() (*dist_beta method*), 597
isf() (*dist_beta_nc_type_I method*), 656
isf() (*dist_beta_prime method*), 613
isf() (*dist_beta_product method*), 735
isf() (*dist_binomial method*), 841
isf() (*dist_birnb_saunders method*), 517
isf() (*dist_box_cov method*), 768
isf() (*dist_box_mvn method*), 773
isf() (*dist_box_nsame_cov method*), 764
isf() (*dist_cauchy method*), 420
isf() (*dist_chi method*), 549
isf() (*dist_chi_nc method*), 660
isf() (*dist_chi_squared method*), 552
isf() (*dist_chi_squared_nc method*), 642
isf() (*dist_dagum method*), 467
isf() (*dist_dunnett1_t method*), 713
isf() (*dist_dunnett2_t method*), 716
isf() (*dist_emg method*), 521
isf() (*dist_exponential method*), 423
isf() (*dist_feller_pareto method*), 628
isf() (*dist_fisher_f method*), 602
isf() (*dist_fisher_f_2nc method*), 686
isf() (*dist_fisher_f_nc method*), 651
isf() (*dist_fisher_r2_type_I method*), 674
isf() (*dist_fisher_z method*), 631
isf() (*dist_fisk method*), 470
isf() (*dist_folded_normal method*), 524

isf() (*dist_frechet method*), 473
isf() (*dist_friedman method*), 890
isf() (*dist_gamma method*), 558
isf() (*dist_gen_beta_exp method*), 625
isf() (*dist_genbeta1 method*), 616
isf() (*dist_genbeta2 method*), 619
isf() (*dist_genlogistic method*), 622
isf() (*dist_genpareto method*), 479
isf() (*dist_geometric method*), 831
isf() (*dist_gev method*), 476
isf() (*dist_gompertz method*), 482
isf() (*dist_gumbel method*), 427
isf() (*dist_half_normal method*), 527
isf() (*dist_halperin_t method*), 722
isf() (*dist_holtsmark method*), 811
isf() (*dist_hotelling_t2 method*), 792
isf() (*dist_hyperexponential method*), 432
isf() (*dist_hypergeometric method*), 851
isf() (*dist_hypoexponential method*), 583
isf() (*dist_invchisquared method*), 562
isf() (*dist_invgamma method*), 566
isf() (*dist_johnson_sb method*), 530
isf() (*dist_johnson_su method*), 533
isf() (*dist_jterpsta_s method*), 879
isf() (*dist_kendall_tau method*), 874
isf() (*dist_kolmogorov_smirnov method*), 803
isf() (*dist_kruskal_wallis method*), 893
isf() (*dist_kumaraswamy method*), 435
isf() (*dist_landau method*), 809
isf() (*dist_laplace method*), 439
isf() (*dist_levy method*), 495
isf() (*dist_lindley method*), 587
isf() (*dist_logistic method*), 443
isf() (*dist_lognormal method*), 498
isf() (*dist_logrv_beta method*), 610
isf() (*dist_logrv_beta_nc_type_II method*), 670
isf() (*dist_logrv_beta_sum method*), 731
isf() (*dist_logrv_chisquared method*), 580
isf() (*dist_logrv_fisher_1mr2 method*), 679
isf() (*dist_lomax method*), 485
isf() (*dist_lrt_s0 method*), 778
isf() (*dist_lrt_x0_s0 method*), 782
isf() (*dist_mann_whitney_u method*), 863
isf() (*dist_mann_whitney_u_lehmann method*), 868
isf() (*dist_mann_whitney_u_milton method*), 871
isf() (*dist_mapairy method*), 816
isf() (*dist_mauchley method*), 760
isf() (*dist_maxwell method*), 570
isf() (*dist_moyal method*), 502
isf() (*dist_nair_t method*), 719
isf() (*dist_nakagami method*), 574
isf() (*dist_negbinom method*), 846
isf() (*dist_nelson_h method*), 725
isf() (*dist_nmax_0 method*), 536
isf() (*dist_nmax_rho method*), 692
isf() (*dist_nmax_rhoij method*), 698
isf() (*dist_nmm_0 method*), 539
isf() (*dist_nmm_rho method*), 695
isf() (*dist_nmm_rhoij method*), 701
isf() (*dist_normal method*), 507
isf() (*dist_normal_range method*), 704
isf() (*dist_page_l method*), 884
isf() (*dist_page_l_nc_milton method*), 887
isf() (*dist_pareto method*), 447
isf() (*dist_pearson_rho method*), 638
isf() (*dist_pearson_rho_nc method*), 666
isf() (*dist_pillai_v method*), 789
isf() (*dist_poisson method*), 836
isf() (*dist_rayleigh method*), 451
isf() (*dist_rice method*), 663
isf() (*dist_roy method*), 786
isf() (*dist_sasnormal method*), 542
isf() (*dist_saspoint5 method*), 821
isf() (*dist_shifted_gompertz method*), 488
isf() (*dist_singh_maddala method*), 491
isf() (*dist_skewnormal method*), 510
isf() (*dist_skewt method*), 635
isf() (*dist_smax method*), 707
isf() (*dist_smm method*), 710
isf() (*dist_stacy method*), 593
isf() (*dist_student_t method*), 607
isf() (*dist_student_t_2nc method*), 683
isf() (*dist_student_t_nc method*), 647
isf() (*dist_studentized_range method*), 728
isf() (*dist_triangular method*), 456
isf() (*dist_truncated_normal method*), 545
isf() (*dist_uniform method*), 459
isf() (*dist_wald method*), 514
isf() (*dist_weibull method*), 463
isf() (*dist_wilcoxon method*), 855
isf() (*dist_wilks_cs method*), 744
isf() (*dist_wilks_iblocks method*), 756
isf() (*dist_wilks_ip method*), 752
isf() (*dist_wilks_lambda method*), 739
isf() (*dist_wilks_lambda_corr method*), 799
isf() (*dist_wilks_lambda_glm method*), 795
isf() (*dist_wilks_lcm method*), 748
isf() (*rv_base method*), 403
isf() (*skewexponpower method*), 590
isfinite() (*ctx method*), 208
isinf() (*ctx method*), 209
isinteger() (*ctx method*), 213
isnan() (*ctx method*), 211
isneginf() (*ctx method*), 210
isnormal() (*ctx method*), 214
isnumber() (*ctx method*), 213
isone() (*ctx method*), 212
isposinf() (*ctx method*), 209

isregular() (*ctx method*), 214
isunordered() (*ctx method*), 215
iszero() (*ctx method*), 211

J

jacobi_amplitude() (*math53 method*), 2290
jacobi_arccd() (*math53 method*), 2303
jacobi_arccn() (*math53 method*), 2302
jacobi_arccs() (*math53 method*), 2305
jacobi_arcdc() (*math53 method*), 2304
jacobi_arcdn() (*math53 method*), 2302
jacobi_arcds() (*math53 method*), 2305
jacobi_arcnc() (*math53 method*), 2304
jacobi_arcnd() (*math53 method*), 2303
jacobi_arcns() (*math53 method*), 2305
jacobi_arcsc() (*math53 method*), 2304
jacobi_arcsd() (*math53 method*), 2303
jacobi_arcsn() (*math53 method*), 2302
jacobi_c() (*ctx method*), 967
jacobi_cd() (*ctx method*), 1359
jacobi_cn() (*ctx method*), 1345
jacobi_cs() (*ctx method*), 1363
jacobi_dc() (*ctx method*), 1353
jacobi_dn() (*ctx method*), 1347
jacobi_ds() (*ctx method*), 1365
jacobi_nc() (*ctx method*), 1349
jacobi_nd() (*ctx method*), 1355
jacobi_ns() (*ctx method*), 1361
jacobi_p() (*ctx method*), 1571
jacobi_sc() (*ctx method*), 1351
jacobi_sd() (*ctx method*), 1357
jacobi_sn() (*ctx method*), 1343
jacobi_theta02() (*math53 method*), 2300
jacobi_theta03() (*math53 method*), 2300
jacobi_theta04() (*math53 method*), 2300
jacobi_theta1() (*ctx method*), 1367
jacobi_theta1p() (*math53 method*), 2300
jacobi_theta2() (*ctx method*), 1369
jacobi_theta3() (*ctx method*), 1371
jacobi_theta4() (*ctx method*), 1373
jacobi_zeta() (*math53 method*), 2292
jensen_inv() (*ctx method*), 980
jterpsta_ecf() (*ctx method*), 881
jterpsta_ecf_inv() (*ctx method*), 881
jterpsta_fm_pmf() (*ctx method*), 1645
jterpsta_ft() (*ctx method*), 881
jterpsta_s_pmf_vector() (*ctx method*), 1659
jterpsta_spa() (*ctx method*), 882
jterpsta_spa_inv() (*ctx method*), 882
JTerpstaSPmfVector() (*math53lib method*), 2403

K

k_x() (*dist_amoroso method*), 577
k_x() (*dist_arcsine method*), 417
k_x() (*dist_bennett method*), 861
k_x() (*dist_beta method*), 597
k_x() (*dist_beta_nc_type_I method*), 657
k_x() (*dist_beta_prime method*), 613
k_x() (*dist_beta_product method*), 735
k_x() (*dist_binomial method*), 842
k_x() (*dist_birnb_saunders method*), 518
k_x() (*dist_box_cov method*), 769
k_x() (*dist_box_mvn method*), 774
k_x() (*dist_box_nsame_cov method*), 765
k_x() (*dist_cauchy method*), 421
k_x() (*dist_chi method*), 549
k_x() (*dist_chi_nc method*), 660
k_x() (*dist_chi_squared method*), 553
k_x() (*dist_chi_squared_nc method*), 643
k_x() (*dist_dagum method*), 467
k_x() (*dist_dunnett1_t method*), 714
k_x() (*dist_dunnett2_t method*), 716
k_x() (*dist_emg method*), 521
k_x() (*dist_exponential method*), 424
k_x() (*dist_feller_pareto method*), 629
k_x() (*dist_fisher_f method*), 602
k_x() (*dist_fisher_f_2nc method*), 686
k_x() (*dist_fisher_f_nc method*), 652
k_x() (*dist_fisher_r2_type_I method*), 675
k_x() (*dist_fisher_z method*), 632
k_x() (*dist_fisk method*), 470
k_x() (*dist_folded_normal method*), 524
k_x() (*dist_frechet method*), 473
k_x() (*dist_friedman method*), 890
k_x() (*dist_gamma method*), 558
k_x() (*dist_gen_beta_exp method*), 625
k_x() (*dist_genbeta1 method*), 616
k_x() (*dist_genbeta2 method*), 619
k_x() (*dist_genlogistic method*), 623
k_x() (*dist_genpareto method*), 479
k_x() (*dist_geometric method*), 832
k_x() (*dist_gev method*), 477
k_x() (*dist_gompertz method*), 482
k_x() (*dist_gumbel method*), 428
k_x() (*dist_half_normal method*), 527
k_x() (*dist_halperin_t method*), 722
k_x() (*dist_hotelling_t2 method*), 792
k_x() (*dist_hyperexponential method*), 432
k_x() (*dist_hypergeometric method*), 852
k_x() (*dist_hypoexponential method*), 584
k_x() (*dist_invchisquared method*), 562
k_x() (*dist_invgamma method*), 566
k_x() (*dist_johnson_sb method*), 530
k_x() (*dist_johnson_su method*), 533
k_x() (*dist_jterpsta_s method*), 880
k_x() (*dist_kendall_tau method*), 875
k_x() (*dist_kruskal_wallis method*), 893
k_x() (*dist_kumaraswamy method*), 436

k_x() (*dist_landau method*), 809
k_x() (*dist_laplace method*), 440
k_x() (*dist_levy method*), 496
k_x() (*dist_lindley method*), 587
k_x() (*dist_logistic method*), 444
k_x() (*dist_lognormal method*), 499
k_x() (*dist_logrv_beta method*), 610
k_x() (*dist_logrv_beta_sum method*), 732
k_x() (*dist_logrv_chisquared method*), 580
k_x() (*dist_lomax method*), 485
k_x() (*dist_lrt_s0 method*), 778
k_x() (*dist_lrt_x0_s0 method*), 783
k_x() (*dist_mann_whitney_u method*), 864
k_x() (*dist_mann_whitney_u_lehmann method*), 869
k_x() (*dist_mann_whitney_u_milton method*), 872
k_x() (*dist_mauchley method*), 761
k_x() (*dist_maxwell method*), 570
k_x() (*dist_moyal method*), 503
k_x() (*dist_nair_t method*), 719
k_x() (*dist_nakagami method*), 574
k_x() (*dist_negbinom method*), 847
k_x() (*dist_nelson_h method*), 725
k_x() (*dist_nmax_0 method*), 537
k_x() (*dist_nmax_rho method*), 692
k_x() (*dist_nmax_rhoij method*), 698
k_x() (*dist_nmm_0 method*), 540
k_x() (*dist_nmm_rho method*), 695
k_x() (*dist_nmm_rhoij method*), 701
k_x() (*dist_normal method*), 507
k_x() (*dist_normal_range method*), 704
k_x() (*dist_page_l method*), 884
k_x() (*dist_page_l_nc_milton method*), 887
k_x() (*dist_pareto method*), 448
k_x() (*dist_pearson_rho method*), 639
k_x() (*dist_pearson_rho_nc method*), 667
k_x() (*dist_pillai_v method*), 789
k_x() (*dist_poisson method*), 837
k_x() (*dist_rayleigh method*), 452
k_x() (*dist_rice method*), 663
k_x() (*dist_roy method*), 786
k_x() (*dist_sasnormal method*), 542
k_x() (*dist_shifted_gompertz method*), 488
k_x() (*dist_singh_maddala method*), 491
k_x() (*dist_skewnormal method*), 511
k_x() (*dist_skewt method*), 635
k_x() (*dist_smax method*), 707
k_x() (*dist_smm method*), 710
k_x() (*dist_stacy method*), 593
k_x() (*dist_student_t method*), 607
k_x() (*dist_student_t_2nc method*), 683
k_x() (*dist_student_t_nc method*), 648
k_x() (*dist_studentized_range method*), 729
k_x() (*dist_triangular method*), 457
k_x() (*dist_truncated_normal method*), 545
k_x() (*dist_uniform method*), 460
k_x() (*dist_wald method*), 515
k_x() (*dist_weibull method*), 464
k_x() (*dist_wilcoxon method*), 857
k_x() (*dist_wilks_cs method*), 745
k_x() (*dist_wilks_iblocks method*), 757
k_x() (*dist_wilks_ip method*), 753
k_x() (*dist_wilks_lambda method*), 740
k_x() (*dist_wilks_lambda_corr method*), 799
k_x() (*dist_wilks_lambda_glm method*), 795
k_x() (*dist_wilks_lcm method*), 749
k_x() (*rv_base method*), 407
k_x() (*skewexponpower method*), 590
k_y() (*dist_logrv_beta_nc_type_II method*), 671
k_y() (*dist_logrv_fisher_1mr2 method*), 680
kelvin_bei() (*ctx method*), 1502
kelvin_bei0() (*math53 method*), 2330
kelvin_bei_prime() (*ctx method*), 1506
kelvin_bei_prime0() (*math53 method*), 2331
kelvin_ber() (*ctx method*), 1501
kelvin_ber0() (*math53 method*), 2330
kelvin_ber_prime() (*ctx method*), 1505
kelvin_ber_prime0() (*math53 method*), 2331
kelvin_kei() (*ctx method*), 1504
kelvin_kei0() (*math53 method*), 2331
kelvin_kei_prime() (*ctx method*), 1508
kelvin_kei_prime0() (*math53 method*), 2332
kelvin_ker() (*ctx method*), 1503
kelvin_ker0() (*math53 method*), 2330
kelvin_ker_prime() (*ctx method*), 1507
kelvin_ker_prime0() (*math53 method*), 2332
kendall_fm_pmf() (*ctx method*), 1645
kendall_ft() (*ctx method*), 876
kendall_tau_ecf() (*ctx method*), 876
kendall_tau_ecf_inv() (*ctx method*), 877
kendall_tau_nc_mu4() (*ctx method*), 1675
kendall_tau_pmf_vector() (*ctx method*), 1658
kendall_tau_spa() (*ctx method*), 877
kendall_tau_spa_inv() (*ctx method*), 877
KendallTauPmfVector() (*math53lib method*), 2403
kepler() (*math53 method*), 2283
khinchin (*ctx property*), 243
klein_j() (*ctx method*), 1384
kolmogorov_smirnov_cdf() (*math53 method*), 802
kolmogorov_smirnov_pdf() (*math53 method*), 802
kolmogorov_smirnov_qtf() (*math53 method*), 802
kron() (*npm method*), 1256
kruskal_wallis_h_pmf_vector() (*ctx method*), 1663
kumaraswamy_cdf() (*math53 method*), 434
kumaraswamy_pdf() (*math53 method*), 434
kumaraswamy_qtf() (*math53 method*), 434
kurtosis() (*dist_bernoulli method*), 828
kurtosis() (*dist_holtsmark method*), 813
kurtosis() (*dist_kolmogorov_smirnov method*), 805

kurtosis() (*dist_mapairy method*), 818
kurtosis() (*dist_saspoint5 method*), 823
kurtosis() (*rv_base method*), 404
kurtosis_excess() (*dist_bernoulli method*), 828
kurtosis_excess() (*dist_holtsmark method*), 813
kurtosis_excess() (*dist_kolmogorov_smirnov method*), 805
kurtosis_excess() (*dist_mapairy method*), 818
kurtosis_excess() (*dist_saspoint5 method*), 823

L

laguerre_l() (*ctx method*), 1514
lambert_w0() (*ctx method*), 390
lambert_wk() (*ctx method*), 391
lambert_wm1() (*ctx method*), 390
landau_cdf() (*math53 method*), 807
landau_pdf() (*math53 method*), 807
landau_qtf() (*math53 method*), 807
langevinl() (*math53 method*), 2283
langevinlinv() (*math53 method*), 2283
laplace_cdf() (*math53 method*), 438
laplace_pdf() (*math53 method*), 438
laplace_qtf() (*math53 method*), 438
laurent_cdf() (*ctx method*), 1641
LBFGS() (*ctxboost method*), 1017
lbfgs_c() (*ctx method*), 918
ldexp() (*ctx method*), 227
legendre_chi() (*ctx method*), 1416
legendre_p() (*ctx method*), 1574
legendre_plm() (*ctx method*), 1575
legendre_q() (*ctx method*), 1576
legendre_qlm() (*ctx method*), 1577
lerch_phi() (*ctx method*), 1387
lerch_zeta() (*ctx method*), 1390
less() (*npm method*), 1263
less_equal() (*npm method*), 1263
Levenberg() (*ctxboost method*), 1008
levenberg_marquardt_c() (*ctx method*), 918
levin() (*ctx method*), 999
levy_cdf() (*math53 method*), 494
levy_pdf() (*math53 method*), 494
levy_qtf() (*math53 method*), 494
lexsort() (*npm method*), 1227
lgamma() (*ctx method*), 372
lgamma1p() (*math53 method*), 2285
lgamma_inv() (*math53 method*), 2287
lgamma_s() (*math53 method*), 2285
limit() (*ctx method*), 995
linspace() (*npm method*), 1184
llrint() (*ctx method*), 219
llround() (*ctx method*), 222
ln10 (*ctx property*), 239
ln2 (*ctx property*), 239
loadtxt() (*npm method*), 1179
lobachevsky_c() (*math53 method*), 2315
lobachevsky_s() (*math53 method*), 2315
localmin() (*ctx method*), 900
log() (*ctx method*), 280
log10() (*ctx method*), 282
log10p1() (*ctx method*), 286
log1mbeta_nc_gp() (*ctx method*), 671
log1mexp() (*math53 method*), 2272
log1p() (*ctx method*), 285
log1pexp() (*math53 method*), 2272
log1pmx() (*math53 method*), 2272
log2() (*ctx method*), 283
log2p1() (*ctx method*), 288
log_beta_prod_gp() (*ctx method*), 736
log_box_cov_gp() (*ctx method*), 770
log_integral() (*ctx method*), 1554
log_integral_inv() (*math53 method*), 2346
logaddexp() (*math53 method*), 2272
logb() (*ctx method*), 225
logbarnes_g() (*ctx method*), 1433
logbeta() (*math53 method*), 2286
logbinomial() (*math53 method*), 2286
logcosh() (*math53 method*), 2282
logfactorial() (*math53 method*), 2285
logical_and() (*npm method*), 1260
logical_or() (*npm method*), 1260
logical_xor() (*npm method*), 1261
logistic() (*math53 method*), 2271
logistic_cdf() (*math53 method*), 442
logistic_pdf() (*math53 method*), 442
logistic_qtf() (*math53 method*), 442
logit() (*math53 method*), 2273
lognormal_cdf() (*math53 method*), 497
lognormal_pdf() (*math53 method*), 497
lognormal_qtf() (*math53 method*), 497
logpdf() (*rv_continuous method*), 411
logpmf() (*rv_discrete method*), 414
logrv_beta_ecf_pdf() (*ctx method*), 611
logrv_beta_ecf_qtf() (*ctx method*), 611
logrv_chisquared_ecf() (*ctx method*), 581
logrv_chisquared_ecf_inv() (*ctx method*), 581
logseries_cdf() (*math53 method*), 2320
logseries_pmf() (*math53 method*), 2320
logsinh() (*math53 method*), 2282
logspace() (*npm method*), 1185
logsubexp() (*math53 method*), 2273
lommel_s1() (*ctx method*), 1605
lommel_s2() (*ctx method*), 1606
lowestvalue() (*ctx method*), 235
lrint() (*ctx method*), 218
lround() (*ctx method*), 222
lrt_vc0_bd() (*ctx method*), 779
lrt_vc0_bd_inv() (*ctx method*), 780
lrt_x0_vc0_bd() (*ctx method*), 784
lrt_x0_vc0_bd_inv() (*ctx method*), 784

lu() (*ctx method*), 1300
lu_solve() (*ctx method*), 1301
lucpoly() (*math53 method*), 2275
luggannini_rice() (*ctx method*), 979

M

m_elliptic_e() (*ctx method*), 1326
m_elliptic_e_inc() (*ctx method*), 1330
m_elliptic_f() (*ctx method*), 1329
m_elliptic_k() (*ctx method*), 1325
m_elliptic_pi() (*ctx method*), 1327
m_elliptic_pi_inc() (*ctx method*), 1331
m_x() (*dist_amoroso method*), 577
m_x() (*dist_arcsine method*), 417
m_x() (*dist_bennett method*), 860
m_x() (*dist_beta method*), 597
m_x() (*dist_beta_nc_type_I method*), 656
m_x() (*dist_beta_prime method*), 613
m_x() (*dist_beta_product method*), 735
m_x() (*dist_binomial method*), 841
m_x() (*dist_birnb_saunders method*), 518
m_x() (*dist_box_cov method*), 768
m_x() (*dist_box_mvn method*), 773
m_x() (*dist_box_nsame_cov method*), 764
m_x() (*dist_cauchy method*), 421
m_x() (*dist_chi method*), 549
m_x() (*dist_chi_nc method*), 660
m_x() (*dist_chi_squared method*), 553
m_x() (*dist_chi_squared_nc method*), 642
m_x() (*dist_dagum method*), 467
m_x() (*dist_dunnett1_t method*), 713
m_x() (*dist_dunnett2_t method*), 716
m_x() (*dist_emg method*), 521
m_x() (*dist_exponential method*), 424
m_x() (*dist_feller_pareto method*), 628
m_x() (*dist_fisher_f method*), 602
m_x() (*dist_fisher_f_2nc method*), 686
m_x() (*dist_fisher_f_nc method*), 651
m_x() (*dist_fisher_r2_type_I method*), 674
m_x() (*dist_fisher_z method*), 631
m_x() (*dist_fisk method*), 470
m_x() (*dist_folded_normal method*), 524
m_x() (*dist_frechet method*), 473
m_x() (*dist_friedman method*), 890
m_x() (*dist_gamma method*), 558
m_x() (*dist_gen_beta_exp method*), 625
m_x() (*dist_genbeta1 method*), 616
m_x() (*dist_genbeta2 method*), 619
m_x() (*dist_genlogistic method*), 622
m_x() (*dist_genpareto method*), 479
m_x() (*dist_geometric method*), 832
m_x() (*dist_gev method*), 477
m_x() (*dist_gompertz method*), 482
m_x() (*dist_gumbel method*), 428
m_x() (*dist_half_normal method*), 527
m_x() (*dist_halperin_t method*), 722
m_x() (*dist_hotelling_t2 method*), 792
m_x() (*dist_hyperexponential method*), 432
m_x() (*dist_hypergeometric method*), 852
m_x() (*dist_hypoexponential method*), 584
m_x() (*dist_invchisquared method*), 562
m_x() (*dist_invgamma method*), 566
m_x() (*dist_johnson_sb method*), 530
m_x() (*dist_johnson_su method*), 533
m_x() (*dist_jterpsta_s method*), 880
m_x() (*dist_kendall_tau method*), 875
m_x() (*dist_kruskal_wallis method*), 893
m_x() (*dist_kumaraswamy method*), 436
m_x() (*dist_landau method*), 809
m_x() (*dist_laplace method*), 440
m_x() (*dist_levy method*), 496
m_x() (*dist_lindley method*), 587
m_x() (*dist_logistic method*), 444
m_x() (*dist_lognormal method*), 499
m_x() (*dist_logrv_beta method*), 610
m_x() (*dist_logrv_beta_sum method*), 731
m_x() (*dist_logrv_chisquared method*), 580
m_x() (*dist_lomax method*), 485
m_x() (*dist_lrt_s0 method*), 778
m_x() (*dist_lrt_x0_s0 method*), 783
m_x() (*dist_mann_whitney_u method*), 864
m_x() (*dist_mann_whitney_u_lehmann method*), 868
m_x() (*dist_mann_whitney_u_milton method*), 871
m_x() (*dist_mauchley method*), 760
m_x() (*dist_maxwell method*), 570
m_x() (*dist_moyal method*), 503
m_x() (*dist_nair_t method*), 719
m_x() (*dist_nakagami method*), 574
m_x() (*dist_negbinom method*), 847
m_x() (*dist_nelson_h method*), 725
m_x() (*dist_nmax_0 method*), 536
m_x() (*dist_nmax_rho method*), 692
m_x() (*dist_nmax_rhoij method*), 698
m_x() (*dist_nmm_0 method*), 539
m_x() (*dist_nmm_rho method*), 695
m_x() (*dist_nmm_rhoij method*), 701
m_x() (*dist_normal method*), 507
m_x() (*dist_normal_range method*), 704
m_x() (*dist_page_l method*), 884
m_x() (*dist_page_l_nc_milton method*), 887
m_x() (*dist_pareto method*), 448
m_x() (*dist_pearson_rho method*), 638
m_x() (*dist_pearson_rho_nc method*), 666
m_x() (*dist_pillai_v method*), 789
m_x() (*dist_poisson method*), 836
m_x() (*dist_rayleigh method*), 452
m_x() (*dist_rice method*), 663
m_x() (*dist_roy method*), 786

m_x() (*dist_sasnormal method*), 542
m_x() (*dist_shifted_gompertz method*), 488
m_x() (*dist_singh_maddala method*), 491
m_x() (*dist_skewnormal method*), 511
m_x() (*dist_skewt method*), 635
m_x() (*dist_smax method*), 707
m_x() (*dist_smm method*), 710
m_x() (*dist_stacy method*), 593
m_x() (*dist_student_t method*), 607
m_x() (*dist_student_t_2nc method*), 683
m_x() (*dist_student_t_nc method*), 648
m_x() (*dist_studentized_range method*), 728
m_x() (*dist_triangular method*), 456
m_x() (*dist_truncated_normal method*), 545
m_x() (*dist_uniform method*), 460
m_x() (*dist_wald method*), 515
m_x() (*dist_weibull method*), 464
m_x() (*dist_wilcoxon method*), 856
m_x() (*dist_wilks_cs method*), 744
m_x() (*dist_wilks_iblocks method*), 756
m_x() (*dist_wilks_ip method*), 752
m_x() (*dist_wilks_lambda method*), 740
m_x() (*dist_wilks_lambda_corr method*), 799
m_x() (*dist_wilks_lambda_glm method*), 795
m_x() (*dist_wilks_lcm method*), 748
m_x() (*rv_base method*), 407
m_x() (*skewexponpower method*), 590
m_y() (*dist_logrv_beta_nc_type_II method*), 670
m_y() (*dist_logrv_fisher_1mr2 method*), 680
mannwhitney_ecf() (*ctx method*), 865
mannwhitney_ecf_inv() (*ctx method*), 865
mannwhitney_fm_pmf() (*ctx method*), 1644
mannwhitney_ft() (*ctx method*), 865
mannwhitney_nc_mu4() (*ctx method*), 1673
mannwhitney_spa() (*ctx method*), 865
mannwhitney_spa_inv() (*ctx method*), 866
mannwhitney_u_lehmann_pmf_vector() (*ctx method*), 1660
mannwhitney_u_milton_pmf_vector() (*ctx method*), 1661
mannwhitney_u_pmf_vector() (*ctx method*), 1659
MannWhitneyUPmfVector() (*math53lib method*), 2403
mapairy_cdf() (*math53 method*), 815
mapairy_pdf() (*math53 method*), 815
mapairy_qtf() (*math53 method*), 815
marcum_q() (*ctx method*), 1475
marcumq1() (*ctx method*), 1648
marcumq1_verified() (*ctx method*), 1652
mat_adjoint() (*ctx method*), 1036
mat_as_diagonal() (*ctx method*), 1035
mat_cod_householder_qr() (*ctx method*), 1087
mat_col_piv_householder_qr() (*ctx method*), 1075
mat_cols() (*ctx method*), 1028
mat_concat_horizontal() (*ctx method*), 1040
mat_concat_vertical() (*ctx method*), 1041
mat_conjugate() (*ctx method*), 1036
mat_conservative_resize() (*ctx method*), 1035
mat_correlation() (*ctx method*), 1050
mat_coshm() (*ctx method*), 1157
mat_cosm() (*ctx method*), 1155
mat_count() (*ctx method*), 1047
mat_covariance() (*ctx method*), 1050
mat_eigen_system() (*ctx method*), 1137
mat_eigen_values() (*ctx method*), 1134
mat_expm() (*ctx method*), 1153
mat_fft_fwd() (*ctx method*), 1150
mat_fft_inv() (*ctx method*), 1150
mat_fill_linear() (*ctx method*), 1027
mat_full_piv_householder_qr() (*ctx method*), 1081
mat_full_piv_lu() (*ctx method*), 1062
mat_gen_eigen_system() (*ctx method*), 1147
mat_gen_eigen_values() (*ctx method*), 1145
mat_generalized_self_adjoint_eigen_system() (*ctx method*), 1119
mat_generalized_self_adjoint_eigen_values() (*ctx method*), 1116
mat_get_block() (*ctx method*), 1029
mat_get_col() (*ctx method*), 1030
mat_get_diagonal() (*ctx method*), 1031
mat_get_row() (*ctx method*), 1030
mat_get_triangular_view() (*ctx method*), 1032
mat_hessenberg() (*ctx method*), 1129
mat_householder_qr() (*ctx method*), 1071
mat_identity() (*ctx method*), 1026
mat_jacobi_svd() (*ctx method*), 1094
mat_jacobi_svd_full() (*ctx method*), 1102
mat_jacobi_svd_thin() (*ctx method*), 1097
mat_ldlt() (*ctx method*), 1051
mat_llt() (*ctx method*), 1067
mat_logm() (*ctx method*), 1161
mat_max_coeff() (*ctx method*), 1049
mat_mean() (*ctx method*), 1049
mat_min_coeff() (*ctx method*), 1049
mat_norm() (*ctx method*), 1050
mat_ones() (*ctx method*), 1026
mat_partial_piv_lu() (*ctx method*), 1057
mat_powm() (*ctx method*), 1163
mat_prod() (*ctx method*), 1049
mat_pseudo_eigen_system() (*ctx method*), 1143
mat_random() (*ctx method*), 1026
mat_random_selfadjoint() (*ctx method*), 1027
mat_random_selfadjoint_posdef() (*ctx method*), 1027
mat_random_symmetric() (*ctx method*), 1026
mat_real_qz() (*ctx method*), 1141
mat_replicate_col_wise() (*ctx method*), 1040
mat_replicate_full() (*ctx method*), 1039
mat_replicate_row_wise() (*ctx method*), 1039
mat_resize() (*ctx method*), 1034
mat_resize_like() (*ctx method*), 1034
mat_reverse_col_wise() (*ctx method*), 1038

mat_reverse_full() (*ctx method*), 1038
mat_reverse_row_wise() (*ctx method*), 1038
mat_rows() (*ctx method*), 1028
mat_schur() (*ctx method*), 1132
mat_self_adjoint_eigen_system() (*ctx method*), 1111
mat_self_adjoint_eigen_values() (*ctx method*), 1108
mat_set_block() (*ctx method*), 1029
mat_set_col() (*ctx method*), 1031
mat_set_diagonal() (*ctx method*), 1031
mat_set_row() (*ctx method*), 1030
mat_set_triangular_view() (*ctx method*), 1032
mat_sinhm() (*ctx method*), 1156
mat_sinm() (*ctx method*), 1154
mat_size() (*ctx method*), 1028
mat_sort() (*ctx method*), 1033
mat_sort_rows_by_col() (*ctx method*), 1033
mat_sqrtm() (*ctx method*), 1159
mat_squared_norm() (*ctx method*), 1050
mat_stable_norm() (*ctx method*), 1050
mat_sum() (*ctx method*), 1049
mat_t() (*ctx method*), 1025
mat_trace() (*ctx method*), 1049
mat_transpose() (*ctx method*), 1037
mat_tridiagonalization() (*ctx method*), 1124
mat_zeros() (*ctx method*), 1025
matmul() (*npm method*), 1253
mauchley_bd() (*ctx method*), 762
mauchley_bd_inv() (*ctx method*), 762
max() (*npm method*), 1240
maximum() (*npm method*), 1240
maxvalue() (*ctx method*), 235
maxwell_cdf() (*math53 method*), 568
maxwell_pdf() (*math53 method*), 568
maxwell_qtf() (*math53 method*), 568
mbrent() (*ctx method*), 903
md_newton_c() (*ctx method*), 917
mean() (*dist_bernoulli method*), 827
mean() (*dist_holtsmark method*), 812
mean() (*dist_kolmogorov_smirnov method*), 804
mean() (*dist_mapairy method*), 817
mean() (*dist_saspoint5 method*), 822
mean() (*npm method*), 1248
mean() (*rv_base method*), 403
median() (*dist_bernoulli method*), 827
median() (*dist_holtsmark method*), 812
median() (*dist_kolmogorov_smirnov method*), 804
median() (*dist_mapairy method*), 817
median() (*dist_saspoint5 method*), 822
median() (*npm method*), 1247
median() (*rv_base method*), 403
mgf_from_cf() (*ctx method*), 1615
mgf_from_cgf() (*ctx method*), 1615
mgf_from_pdf() (*ctx method*), 1615
mgf_from_pgf() (*ctx method*), 1615
mgf_from_rawmoments() (*ctx method*), 1615
min() (*npm method*), 1241
minimum() (*npm method*), 1240
minposvalue() (*ctx method*), 236
mnewton_c() (*ctx method*), 916
mnorm() (*ctx method*), 1298
mode() (*dist_bernoulli method*), 827
mode() (*dist_holtsmark method*), 812
mode() (*dist_kolmogorov_smirnov method*), 803
mode() (*dist_mapairy method*), 817
mode() (*dist_saspoint5 method*), 822
mode() (*rv_base method*), 403
modf() (*ctx method*), 229
moebius() (*math53 method*), 2319
moments() (*dist_amoroso method*), 577
moments() (*dist_arcsine method*), 418
moments() (*dist_bennett method*), 861
moments() (*dist_beta method*), 598
moments() (*dist_beta_nc_type_I method*), 657
moments() (*dist_beta_prime method*), 613
moments() (*dist_beta_product method*), 736
moments() (*dist_binomial method*), 842
moments() (*dist_birnb_saunders method*), 518
moments() (*dist_box_cov method*), 769
moments() (*dist_box_mvn method*), 774
moments() (*dist_box_nsame_cov method*), 765
moments() (*dist_cauchy method*), 421
moments() (*dist_chi method*), 549
moments() (*dist_chi_nc method*), 660
moments() (*dist_chi_squared method*), 553
moments() (*dist_chi_squared_nc method*), 643
moments() (*dist_dagum method*), 467
moments() (*dist_dunnett1_t method*), 714
moments() (*dist_dunnett2_t method*), 716
moments() (*dist_emg method*), 522
moments() (*dist_exponential method*), 424
moments() (*dist_feller_pareto method*), 629
moments() (*dist_fisher_f method*), 602
moments() (*dist_fisher_f_2nc method*), 686
moments() (*dist_fisher_f_nc method*), 652
moments() (*dist_fisher_r2_type_I method*), 675
moments() (*dist_fisher_z method*), 632
moments() (*dist_fisk method*), 470
moments() (*dist_folded_normal method*), 525
moments() (*dist_frechet method*), 473
moments() (*dist_friedman method*), 891
moments() (*dist_gamma method*), 559
moments() (*dist_gen_beta_exp method*), 626
moments() (*dist_genbeta1 method*), 616
moments() (*dist_genbeta2 method*), 619
moments() (*dist_genlogistic method*), 623
moments() (*dist_genpareto method*), 479
moments() (*dist_geometric method*), 832
moments() (*dist_gev method*), 477

moments() (*dist_gompertz method*), 483
moments() (*dist_gumbel method*), 428
moments() (*dist_half_normal method*), 528
moments() (*dist_halperin_t method*), 722
moments() (*dist_hotelling_t2 method*), 792
moments() (*dist_hyperexponential method*), 433
moments() (*dist_hypergeometric method*), 852
moments() (*dist_hypoexponential method*), 584
moments() (*dist_invchisquared method*), 562
moments() (*dist_invgamma method*), 566
moments() (*dist_johnson_sb method*), 531
moments() (*dist_johnson_su method*), 534
moments() (*dist_jterpsta_s method*), 881
moments() (*dist_kendall_tau method*), 876
moments() (*dist_kruskal_wallis method*), 894
moments() (*dist_kumaraswamy method*), 436
moments() (*dist_landau method*), 809
moments() (*dist_laplace method*), 440
moments() (*dist_levy method*), 496
moments() (*dist_lindley method*), 588
moments() (*dist_logistic method*), 444
moments() (*dist_lognormal method*), 499
moments() (*dist_logrv_beta method*), 611
moments() (*dist_logrv_beta_nc_type_II method*), 671
moments() (*dist_logrv_beta_sum method*), 732
moments() (*dist_logrv_chisquared method*), 581
moments() (*dist_logrv_fisher_1mr2 method*), 680
moments() (*dist_lomax method*), 485
moments() (*dist_lrt_s0 method*), 779
moments() (*dist_lrt_x0_s0 method*), 783
moments() (*dist_mann_whitney_u method*), 865
moments() (*dist_mann_whitney_u_lehmann method*), 869
moments() (*dist_mann_whitney_u_milton method*), 872
moments() (*dist_mauchley method*), 761
moments() (*dist_maxwell method*), 571
moments() (*dist_moyal method*), 503
moments() (*dist_nair_t method*), 719
moments() (*dist_nakagami method*), 575
moments() (*dist_negbinom method*), 847
moments() (*dist_nelson_h method*), 725
moments() (*dist_nmax_0 method*), 537
moments() (*dist_nmax_rho method*), 693
moments() (*dist_nmax_rhoij method*), 699
moments() (*dist_nmm_0 method*), 540
moments() (*dist_nmm_rho method*), 695
moments() (*dist_nmm_rhoij method*), 701
moments() (*dist_normal method*), 508
moments() (*dist_normal_range method*), 705
moments() (*dist_page_l method*), 884
moments() (*dist_page_l_nc_milton method*), 888
moments() (*dist_pareto method*), 448
moments() (*dist_pearson_rho method*), 639
moments() (*dist_pearson_rho_nc method*), 667
moments() (*dist_pillai_v method*), 789
moments() (*dist_poisson method*), 837
moments() (*dist_rayleigh method*), 452
moments() (*dist_rice method*), 663
moments() (*dist_roy method*), 787
moments() (*dist_sasnormal method*), 543
moments() (*dist_shifted_gompertz method*), 489
moments() (*dist_singh_maddala method*), 491
moments() (*dist_skewnormal method*), 511
moments() (*dist_skewt method*), 635
moments() (*dist_smax method*), 707
moments() (*dist_smm method*), 710
moments() (*dist_stacy method*), 593
moments() (*dist_student_t method*), 607
moments() (*dist_student_t_2nc method*), 683
moments() (*dist_student_t_nc method*), 648
moments() (*dist_studentized_range method*), 729
moments() (*dist_triangular method*), 457
moments() (*dist_truncated_normal method*), 546
moments() (*dist_uniform method*), 460
moments() (*dist_wald method*), 515
moments() (*dist_weibull method*), 464
moments() (*dist_wilcoxon method*), 857
moments() (*dist_wilks_cs method*), 745
moments() (*dist_wilks_iblocks method*), 757
moments() (*dist_wilks_ip method*), 753
moments() (*dist_wilks_lambda method*), 740
moments() (*dist_wilks_lambda_corr method*), 800
moments() (*dist_wilks_lambda_glm method*), 796
moments() (*dist_wilks_lcm method*), 749
moments() (*skewexponpower method*), 591
moveaxis() (*npm method*), 1203
moyal_cdf() (*math53 method*), 501
moyal_pdf() (*math53 method*), 501
moyal_qtf() (*math53 method*), 501
muller() (*ctx method*), 914
multiply() (*npm method*), 1244

N

NairCdf() (*math53lib method*), 2400
NairDist() (*math53lib method*), 2400
NairPdf() (*math53lib method*), 2400
NairQtf() (*math53lib method*), 2400
nakagami_cdf() (*math53 method*), 572
nakagami_pdf() (*math53 method*), 572
nakagami_qtf() (*math53 method*), 572
nan() (*ctx method*), 206
nc_ci() (*dist_fisher_f_2nc method*), 687
nc_ci() (*dist_fisher_f_nc method*), 652
ndens() (*ctx method*), 1541
ndis() (*ctx method*), 1542
ndisx() (*math53 method*), 1542
nearbyint() (*ctx method*), 218
negative() (*npm method*), 1243
negative_binomial_pmf_vector() (*ctx method*), 1656

negbinom_ecf() (*ctx method*), 848
negbinom_ecf_inv() (*ctx method*), 848
negbinom_spa() (*ctx method*), 848
negbinom_spa_inv() (*ctx method*), 848
negbinomial_cdf() (*math53 method*), 844
negbinomial_pmf() (*math53 method*), 844
negbinomial_qtf() (*math53 method*), 844
neginf() (*ctx method*), 206
negzero (*ctx property*), 204
NelderMead() (*ctxboost method*), 1011
neville_theta_c() (*math53 method*), 2309
neville_theta_d() (*math53 method*), 2309
neville_theta_n() (*math53 method*), 2309
neville_theta_s() (*math53 method*), 2310
newton_c() (*ctx method*), 915
newton_steffenson_c() (*ctx method*), 915
NewtonDescent() (*ctxboost method*), 1023
NewtonRaphson() (*ctxboost method*), 907
nextafter() (*ctx method*), 237
NmaxRhoCdf() (*math53lib method*), 2389
NmaxRhoDist() (*math53lib method*), 2389
NmaxRhoijCdf() (*math53lib method*), 2392
NmaxRhoijDist() (*math53lib method*), 2392
NmaxRhoijPdf() (*math53lib method*), 2392
NmaxRhoijQtf() (*math53lib method*), 2392
NmaxRhoPdf() (*math53lib method*), 2389
NmaxRhoQtf() (*math53lib method*), 2389
NmmRhoCdf() (*math53lib method*), 2391
NmmRhoDist() (*math53lib method*), 2391
NmmRhoijCdf() (*math53lib method*), 2393
NmmRhoijDist() (*math53lib method*), 2393
NmmRhoijPdf() (*math53lib method*), 2393
NmmRhoijQtf() (*math53lib method*), 2393
NmmRhoPdf() (*math53lib method*), 2391
NmmRhoQtf() (*math53lib method*), 2391
nnlf() (*rv_continuous method*), 411
nonzero() (*npm method*), 1232
norm() (*ctx method*), 1297
Norm() (*mat method*), 1295
normal_cdf() (*math53 method*), 505
normal_pdf() (*math53 method*), 505
normal_qtf() (*math53 method*), 505
not_equal() (*npm method*), 1264
nprod() (*ctx method*), 993
NrangeCdf() (*math53lib method*), 2395
NrangeDist() (*math53lib method*), 2395
NrangePdf() (*math53lib method*), 2395
NrangeQtf() (*math53lib method*), 2395
nsum() (*ctx method*), 986

O

odefun() (*ctx method*), 973
one (*Cxt property*), 205
onej (*ctx property*), 256
ones() (*npm method*), 1168
ones_like() (*npm method*), 1168
OouraCos() (*ctxboost method*), 933
OouraSin() (*ctxboost method*), 934
outer() (*npm method*), 1252
owen_t() (*ctx method*), 1550
owent() (*ctx method*), 1649
owent_verified() (*ctx method*), 1653

P

pad() (*npm method*), 1218
pade() (*ctx method*), 983
page_ecf() (*ctx method*), 885
page_ecf_inv() (*ctx method*), 885
page_l_pmf_vector() (*ctx method*), 1660
page_spa() (*ctx method*), 885
page_spa_inv() (*ctx method*), 885
PageLPmfVector() (*math53lib method*), 2404
pareto_cdf() (*math53 method*), 446
pareto_pdf() (*math53 method*), 446
pareto_qtf() (*math53 method*), 446
pdf() (*dist_amoroso method*), 576
pdf() (*dist_arcsine method*), 416
pdf() (*dist_beta method*), 596
pdf() (*dist_beta_nc_type_I method*), 655
pdf() (*dist_beta_prime method*), 612
pdf() (*dist_beta_product method*), 734
pdf() (*dist_birnb_saunders method*), 516
pdf() (*dist_box_cov method*), 767
pdf() (*dist_box_mvn method*), 772
pdf() (*dist_box_nsame_cov method*), 763
pdf() (*dist_cauchy method*), 420
pdf() (*dist_chi method*), 548
pdf() (*dist_chi_nc method*), 659
pdf() (*dist_chi_squared method*), 552
pdf() (*dist_chi_squared_nc method*), 641
pdf() (*dist_dagum method*), 466
pdf() (*dist_dunnett1_t method*), 712
pdf() (*dist_dunnett2_t method*), 715
pdf() (*dist_emg method*), 520
pdf() (*dist_exponential method*), 422
pdf() (*dist_feller_pareto method*), 627
pdf() (*dist_fisher_f method*), 601
pdf() (*dist_fisher_f_2nc method*), 685
pdf() (*dist_fisher_f_nc method*), 650
pdf() (*dist_fisher_r2_type_I method*), 673
pdf() (*dist_fisher_z method*), 630
pdf() (*dist_fisk method*), 469
pdf() (*dist_folded_normal method*), 523
pdf() (*dist_frechet method*), 472
pdf() (*dist_gamma method*), 557
pdf() (*dist_gen_beta_exp method*), 624
pdf() (*dist_genbeta1 method*), 615
pdf() (*dist_genbeta2 method*), 618

pdf() (*dist_genlogistic method*), 621
pdf() (*dist_genpareto method*), 478
pdf() (*dist_gev method*), 475
pdf() (*dist_gompertz method*), 481
pdf() (*dist_gumbel method*), 427
pdf() (*dist_half_normal method*), 526
pdf() (*dist_halperin_t method*), 721
pdf() (*dist_holtsmark method*), 811
pdf() (*dist_hotelling_t2 method*), 791
pdf() (*dist_hyperexponential method*), 431
pdf() (*dist_hypoexponential method*), 582
pdf() (*dist_invchisquared method*), 561
pdf() (*dist_invgamma method*), 565
pdf() (*dist_johnson_sb method*), 529
pdf() (*dist_johnson_su method*), 532
pdf() (*dist_kolmogorov_smirnov method*), 803
pdf() (*dist_kumaraswamy method*), 435
pdf() (*dist_landau method*), 808
pdf() (*dist_laplace method*), 438
pdf() (*dist_levy method*), 495
pdf() (*dist_lindley method*), 586
pdf() (*dist_logistic method*), 442
pdf() (*dist_lognormal method*), 497
pdf() (*dist_logrv_beta method*), 609
pdf() (*dist_logrv_beta_nc_type_II method*), 669
pdf() (*dist_logrv_beta_sum method*), 730
pdf() (*dist_logrv_chisquared method*), 579
pdf() (*dist_logrv_fisher_1mr2 method*), 678
pdf() (*dist_lomax method*), 484
pdf() (*dist_lrt_s0 method*), 776
pdf() (*dist_lrt_x0_s0 method*), 781
pdf() (*dist_mapairy method*), 816
pdf() (*dist_mauchley method*), 759
pdf() (*dist_maxwell method*), 569
pdf() (*dist_moyal method*), 502
pdf() (*dist_nair_t method*), 718
pdf() (*dist_nakagami method*), 573
pdf() (*dist_nelson_h method*), 724
pdf() (*dist_nmax_0 method*), 535
pdf() (*dist_nmax_rho method*), 691
pdf() (*dist_nmax_rhoij method*), 697
pdf() (*dist_nmm_0 method*), 538
pdf() (*dist_nmm_rho method*), 694
pdf() (*dist_nmm_rhoij method*), 700
pdf() (*dist_normal method*), 506
pdf() (*dist_normal_range method*), 703
pdf() (*dist_pareto method*), 446
pdf() (*dist_pearson_rho method*), 637
pdf() (*dist_pearson_rho_nc method*), 665
pdf() (*dist_pillai_v method*), 788
pdf() (*dist_rayleigh method*), 450
pdf() (*dist_rice method*), 662
pdf() (*dist_roy method*), 785
pdf() (*dist_sasnormal method*), 541
pdf() (*dist_saspoint5 method*), 821
pdf() (*dist_shifted_gompertz method*), 487
pdf() (*dist_singh_maddala method*), 490
pdf() (*dist_skewnormal method*), 509
pdf() (*dist_skewt method*), 634
pdf() (*dist_smax method*), 706
pdf() (*dist_smm method*), 709
pdf() (*dist_stacy method*), 592
pdf() (*dist_student_t method*), 606
pdf() (*dist_student_t_2nc method*), 682
pdf() (*dist_student_t_nc method*), 646
pdf() (*dist_studentized_range method*), 727
pdf() (*dist_triangular method*), 455
pdf() (*dist_truncated_normal method*), 544
pdf() (*dist_uniform method*), 458
pdf() (*dist_wald method*), 514
pdf() (*dist_weibull method*), 462
pdf() (*dist_wilks_cs method*), 743
pdf() (*dist_wilks_iblocks method*), 755
pdf() (*dist_wilks_ip method*), 751
pdf() (*dist_wilks_lambda method*), 739
pdf() (*dist_wilks_lambda_corr method*), 798
pdf() (*dist_wilks_lambda_glm method*), 794
pdf() (*dist_wilks_lcm method*), 747
pdf() (*rv_continuous method*), 410
pdf() (*skewexponpower method*), 589
pdf_from_cdf() (*ctx method*), 1608
pdf_from_cf() (*ctx method*), 1608
pdf_from_cf_boost() (*ctx method*), 934
pearson_rho_ci() (*ctx method*), 2453
pearson_rho_nc_gt_cdf() (*ctx method*), 1639
pearson_rho_nc_ht_cdf() (*ctx method*), 1638
pearson_rho_nc_owen_cdf() (*ctx method*), 1629
pearson_rho_nc_owen_pdf() (*ctx method*), 1628
pearson_rho_power() (*ctx method*), 2455
pearson_rho_samplesize() (*ctx method*), 2457
pearson_rho_test() (*ctx method*), 2451
pearson_rho_wb_cdf() (*ctx method*), 1667
pearson_rho_wb_cl() (*ctx method*), 1668
pearson_rho_wb_pdf() (*ctx method*), 1667
pearson_rho_wb_qtf() (*ctx method*), 1667
pentagamma() (*math53 method*), 2311
pgf() (*rv_discrete method*), 412
pgf_from_mgf() (*ctx method*), 1617
pgf_from_pmf_vector() (*ctx method*), 1617
phase() (*ctx method*), 251
phi (*ctx property*), 238
pi (*ctx property*), 240
pillai_v_bd() (*ctx method*), 790
pillai_v_bd_inv() (*ctx method*), 790
pillai_v_ecf() (*ctx method*), 790
pillai_v_ecf_inv() (*ctx method*), 790
pillai_v_glm_chi2_cdf() (*ctx method*), 1694
pillai_v_glm_mu2_cdf() (*ctx method*), 1701

pillai_v_ind_chi2_cdf() (*ctx method*), 1695
pillai_v_ind_mu2_cdf() (*ctx method*), 1701
pillay_v_mu3_cdf() (*ctx method*), 1688
pillay_v_mu3_qtf() (*ctx method*), 1688
plot (*gui property*), 94
pmf() (*dist_bennett method*), 859
pmf() (*dist_bernoulli method*), 826
pmf() (*dist_binomial method*), 840
pmf() (*dist_friedman method*), 889
pmf() (*dist_geometric method*), 830
pmf() (*dist_hypergeometric method*), 850
pmf() (*dist_jterpsta_s method*), 878
pmf() (*dist_kendall_tau method*), 873
pmf() (*dist_kruskal_wallis method*), 892
pmf() (*dist_mann_whitney_u method*), 862
pmf() (*dist_mann_whitney_u_lehmann method*), 867
pmf() (*dist_mann_whitney_u_milton method*), 870
pmf() (*dist_negbinom method*), 845
pmf() (*dist_page_l method*), 883
pmf() (*dist_page_l_nc_milton method*), 886
pmf() (*dist_poisson method*), 835
pmf() (*dist_wilcoxon method*), 854
pmf() (*rv_discrete method*), 412
pmf_from_cdf() (*ctx method*), 1609
pmf_from_cf_lattice() (*ctx method*), 1609
pmf_from_factorialmoments() (*ctx method*), 1609
pmfvec() (*rv_discrete method*), 413
poch1() (*math53 method*), 2287
poisson_cdf() (*math53 method*), 834
poisson_ecf() (*ctx method*), 837
poisson_ecf_inv() (*ctx method*), 837
poisson_pmf() (*math53 method*), 834
poisson_pmf_vector() (*ctx method*), 1655
poisson_qtf() (*math53 method*), 834
poisson_spa() (*ctx method*), 838
poisson_spa_inv() (*ctx method*), 838
polar() (*ctx method*), 254
poly_eval() (*ctx method*), 1149
poly_roots() (*ctx method*), 1149
polygamma() (*ctx method*), 1392
polylog() (*ctx method*), 1400
polylog_i() (*math53 method*), 2313
polyroots() (*ctx method*), 1004
polyval() (*ctx method*), 1004
positive() (*npm method*), 1243
pow() (*ctx method*), 297
pow1p() (*ctx method*), 300
pow1pm1() (*ctx method*), 301
pow_si() (*ctx method*), 293
PowellHybrid() (*ctxboost method*), 1006
powm1() (*ctx method*), 298
primezeta() (*math53 method*), 2318
prod() (*npm method*), 1234
psf() (*rv_continuous method*), 410
psi_inv() (*math53 method*), 2312
psistar() (*math53 method*), 2311

Q

qagi() (*ctx method*), 922
qags() (*ctx method*), 921
qawc() (*ctx method*), 923
qr() (*ctx method*), 1302
qr_solve() (*ctx method*), 1303
qtf() (*dist_amoroso method*), 576
qtf() (*dist_arcsine method*), 416
qtf() (*dist_bennett method*), 859
qtf() (*dist_bernoulli method*), 826
qtf() (*dist_beta method*), 596
qtf() (*dist_beta_nc_type_I method*), 656
qtf() (*dist_beta_prime method*), 613
qtf() (*dist_beta_product method*), 734
qtf() (*dist_binomial method*), 841
qtf() (*dist_birnb_saunders method*), 517
qtf() (*dist_box_cov method*), 768
qtf() (*dist_box_mvn method*), 773
qtf() (*dist_box_nsame_cov method*), 764
qtf() (*dist_cauchy method*), 420
qtf() (*dist_chi method*), 548
qtf() (*dist_chi_nc method*), 659
qtf() (*dist_chi_squared method*), 552
qtf() (*dist_chi_squared_nc method*), 642
qtf() (*dist_dagum method*), 466
qtf() (*dist_dunnett1_t method*), 713
qtf() (*dist_dunnett2_t method*), 716
qtf() (*dist_emg method*), 520
qtf() (*dist_exponential method*), 423
qtf() (*dist_feller_pareto method*), 628
qtf() (*dist_fisher_f method*), 602
qtf() (*dist_fisher_f_2nc method*), 686
qtf() (*dist_fisher_f_nc method*), 651
qtf() (*dist_fisher_r2_type_I method*), 674
qtf() (*dist_fisher_z method*), 631
qtf() (*dist_fisk method*), 469
qtf() (*dist_folded_normal method*), 523
qtf() (*dist_frechet method*), 472
qtf() (*dist_friedman method*), 889
qtf() (*dist_gamma method*), 557
qtf() (*dist_gen_beta_exp method*), 624
qtf() (*dist_genbeta1 method*), 615
qtf() (*dist_genbeta2 method*), 618
qtf() (*dist_genlogistic method*), 622
qtf() (*dist_genpareto method*), 478
qtf() (*dist_geometric method*), 831
qtf() (*dist_gev method*), 476
qtf() (*dist_gompertz method*), 481
qtf() (*dist_gumbel method*), 427
qtf() (*dist_half_normal method*), 526
qtf() (*dist_halperin_t method*), 722

qtf() (*dist_holtsmark method*), 811
qtf() (*dist_hotelling_t2 method*), 791
qtf() (*dist_hyperexponential method*), 431
qtf() (*dist_hypergeometric method*), 851
qtf() (*dist_hypoexponential method*), 583
qtf() (*dist_invchisquared method*), 561
qtf() (*dist_invgamma method*), 565
qtf() (*dist_johnson_sb method*), 529
qtf() (*dist_johnson_su method*), 532
qtf() (*dist_jterpsta_s method*), 879
qtf() (*dist_kendall_tau method*), 874
qtf() (*dist_kolmogorov_smirnov method*), 803
qtf() (*dist_kruskal_wallis method*), 892
qtf() (*dist_kumaraswamy method*), 435
qtf() (*dist_landau method*), 808
qtf() (*dist_laplace method*), 439
qtf() (*dist_levy method*), 495
qtf() (*dist_lindley method*), 586
qtf() (*dist_logistic method*), 443
qtf() (*dist_lognormal method*), 498
qtf() (*dist_logrv_beta method*), 609
qtf() (*dist_logrv_beta_nc_type_II method*), 670
qtf() (*dist_logrv_beta_sum method*), 731
qtf() (*dist_logrv_chisquared method*), 579
qtf() (*dist_logrv_fisher_1mr2 method*), 679
qtf() (*dist_lomax method*), 484
qtf() (*dist_lrt_s0 method*), 777
qtf() (*dist_lrt_x0_s0 method*), 782
qtf() (*dist_mann_whitney_u method*), 863
qtf() (*dist_mann_whitney_u_lehmann method*), 867
qtf() (*dist_mann_whitney_u_milton method*), 870
qtf() (*dist_mapairy method*), 816
qtf() (*dist_mauchley method*), 760
qtf() (*dist_maxwell method*), 569
qtf() (*dist_moyal method*), 502
qtf() (*dist_nair_t method*), 719
qtf() (*dist_nakagami method*), 573
qtf() (*dist_negbinom method*), 846
qtf() (*dist_nelson_h method*), 725
qtf() (*dist_nmax_0 method*), 536
qtf() (*dist_nmax_rho method*), 691
qtf() (*dist_nmax_rhoij method*), 697
qtf() (*dist_nmm_0 method*), 539
qtf() (*dist_nmm_rho method*), 694
qtf() (*dist_nmm_rhoij method*), 700
qtf() (*dist_normal method*), 506
qtf() (*dist_normal_range method*), 703
qtf() (*dist_page_l method*), 883
qtf() (*dist_page_l_nc_milton method*), 886
qtf() (*dist_pareto method*), 447
qtf() (*dist_pearson_rho method*), 637
qtf() (*dist_pearson_rho_nc method*), 666
qtf() (*dist_pillai_v method*), 788
qtf() (*dist_poisson method*), 835
qtf() (*dist_rayleigh method*), 451
qtf() (*dist_rice method*), 662
qtf() (*dist_roy method*), 785
qtf() (*dist_sasnormal method*), 541
qtf() (*dist_saspoint5 method*), 821
qtf() (*dist_shifted_gompertz method*), 487
qtf() (*dist_singh_maddala method*), 490
qtf() (*dist_skewnormal method*), 510
qtf() (*dist_skewt method*), 634
qtf() (*dist_smax method*), 707
qtf() (*dist_smm method*), 710
qtf() (*dist_stacy method*), 592
qtf() (*dist_student_t method*), 606
qtf() (*dist_student_t_2nc method*), 683
qtf() (*dist_student_t_nc method*), 647
qtf() (*dist_studentized_range method*), 728
qtf() (*dist_triangular method*), 456
qtf() (*dist_truncated_normal method*), 544
qtf() (*dist_uniform method*), 459
qtf() (*dist_wald method*), 514
qtf() (*dist_weibull method*), 463
qtf() (*dist_wilcoxon method*), 855
qtf() (*dist_wilks_cs method*), 744
qtf() (*dist_wilks_iblocks method*), 756
qtf() (*dist_wilks_ip method*), 752
qtf() (*dist_wilks_lambda method*), 739
qtf() (*dist_wilks_lambda_corr method*), 798
qtf() (*dist_wilks_lambda_glm method*), 794
qtf() (*dist_wilks_lcm method*), 748
qtf() (*rv_base method*), 402
qtf() (*skewexponpower method*), 589
quad() (*ctx method*), 937
quad_bellshaped(), 1647
quad_erf() (*ctx method*), 1647
quad_erf_verified() (*ctx method*), 1651
quad_gamma_lower() (*ctx method*), 1647
quad_gamma_lower_verified() (*ctx method*), 1651
quad_gamma_upper() (*ctx method*), 1647
quad_gamma_upper_verified() (*ctx method*), 1651
quad_ibeta() (*ctx method*), 1648
quad_ibeta_verified() (*ctx method*), 1651
quad_verified(), 943
quade_l_pmf_vector() (*ctx method*), 1660
quade_s_pmf_vector() (*ctx method*), 1662
quade_s_pmf_vector() (*math53lib method*), 2406
QuadeLPmfVector() (*math53lib method*), 2405
quadosc() (*ctx method*), 941
quadratic_equation() (*ctx method*), 2381
quadsubdiv() (*ctx method*), 940
quanc8() (*ctx method*), 920
quartic_equation() (*ctx method*), 2384

R

r_sy_tridiag(), 1310

range_lower_endpoint() (*Dist method*), 406
range_lower_endpoint() (*dist_bernoulli method*), 828
range_lower_endpoint() (*dist_holtsmark method*), 813
range_lower_endpoint() (*dist_kolmogorov_smirnov method*), 805
range_lower_endpoint() (*dist_mapairy method*), 818
range_lower_endpoint() (*dist_saspoint5 method*), 823
range_upper_endpoint() (*Dist method*), 406
range_upper_endpoint() (*dist_bernoulli method*), 829
range_upper_endpoint() (*dist_holtsmark method*), 814
range_upper_endpoint() (*dist_kolmogorov_smirnov method*), 805
range_upper_endpoint() (*dist_mapairy method*), 819
range_upper_endpoint() (*dist_saspoint5 method*), 824
ravel() (*npm method*), 1200
raw_moments() (*rv_base method*), 408
rawmoments_from_centralmoments() (*ctx method*), 1619
rawmoments_from_cf() (*ctx method*), 1620
rawmoments_from_cumulants() (*ctx method*), 1620
rawmoments_from_factorial_moments() (*ctx method*), 1619
rawmoments_from_mgf() (*ctx method*), 1620
rawmoments_from_pdf() (*ctx method*), 1619
rawmoments_from_pgf() (*ctx method*), 1620
rawmoments_from_pmf_vector() (*ctx method*), 1619
rayleigh_cdf() (*math53 method*), 450
rayleigh_pdf() (*math53 method*), 450
rayleigh_qtf() (*math53 method*), 450
real() (*ctx method*), 248
reciprocal() (*npm method*), 1246
rect() (*ctx method*), 256
recurrence_cdf() (*dist_fisher_f method*), 603
recurrence_pdf() (*dist_fisher_f method*), 603
remainder() (*ctx method*), 230
remainder() (*npm method*), 1245
remquo() (*ctx method*), 231
repeat() (*npm method*), 1217
reshape() (*npm method*), 1199
residual() (*ctx method*), 1301
rgamma() (*ctx method*), 374
richardson() (*ctx method*), 997
ridder() (*ctx method*), 914
riemann_r() (*math53 method*), 2318
riemann_r_inv() (*math53 method*), 2318
riemann_xi() (*ctx method*), 1447
rint() (*ctx method*), 218
rising_factorial() (*ctx method*), 380
rogers_ramanujan_cf() (*math53 method*), 2318
roll() (*npm method*), 1224
root_si() (*ctx method*), 263
roots_to_monic_poly() (*ctx method*), 1149
rot90() (*npm method*), 1225
round() (*ctx method*), 221
roy_chiani_cdf() (*ctx method*), 1679
roy_chiani_pdf() (*ctx method*), 1678
roy_chiani_qtf() (*ctx method*), 1680
roy_glm_mu2_cdf() (*ctx method*), 1701
roy_ind_mu2_cdf() (*ctx method*), 1702
roy_pdf_cdf_sf() (*ctx method*), 1631
rsqrt() (*ctx method*), 259
RungeKutta4Const() (*ctxboost method*), 956
rv_base (*built-in class*), 401
rv_continuous (*built-in class*), 410
rv_discrete (*built-in class*), 412

S

saspoint5_cdf() (*math53 method*), 820
saspoint5_pdf() (*math53 method*), 820
saspoint5_qtf() (*math53 method*), 820
scalbln() (*ctx method*), 228
scalbn() (*ctx method*), 228
Schroeder() (*ctxboost method*), 909
schur() (*ctx method*), 1314
scorer_gi() (*ctx method*), 1595
scorer_gi_prime() (*ctx method*), 1597
scorer_hi() (*ctx method*), 1596
scorer_hi_prime() (*ctx method*), 1598
sec() (*ctx method*), 314
secant() (*ctx method*), 912
sech() (*ctx method*), 339
secpi() (*ctx method*), 325
select() (*npm method*), 1233
set_cdf_method() (*rv_base method*), 401
set_central_moments_method() (*rv_base method*), 408
set_cf_method() (*rv_base method*), 406
set_cgf_method() (*rv_base method*), 407
set_cumulants_method() (*rv_base method*), 409
set_mgf_method() (*rv_base method*), 407
set_moments_method() (*rv_base method*), 408
set_pdf_method() (*rv_base method*), 410
set_pgf_method() (*rv_base method*), 413
set_pmf_method() (*rv_base method*), 412
set_qtf_method() (*rv_base method*), 402
setdps() (*gui method*), 93
sf() (*dist_amoroso method*), 576
sf() (*dist_arcsine method*), 416
sf() (*dist_bennett method*), 859
sf() (*dist_bernoulli method*), 826
sf() (*dist_beta method*), 596
sf() (*dist_beta_nc_type_I method*), 655
sf() (*dist_beta_prime method*), 612
sf() (*dist_beta_product method*), 734
sf() (*dist_binomial method*), 840
sf() (*dist_birnb_saunders method*), 517
sf() (*dist_box_cov method*), 767
sf() (*dist_box_mvn method*), 772
sf() (*dist_box_nsame_cov method*), 763
sf() (*dist_cauchy method*), 420

sf() (*dist_chi method*), 548
sf() (*dist_chi_nc method*), 659
sf() (*dist_chi_squared method*), 552
sf() (*dist_chi_squared_nc method*), 641
sf() (*dist_dagum method*), 466
sf() (*dist_dunnett1_t method*), 712
sf() (*dist_dunnett2_t method*), 715
sf() (*dist_emg method*), 520
sf() (*dist_exponential method*), 423
sf() (*dist_feller_pareto method*), 627
sf() (*dist_fisher_f method*), 601
sf() (*dist_fisher_f_2nc method*), 685
sf() (*dist_fisher_f_nc method*), 650
sf() (*dist_fisher_r2_type_I method*), 673
sf() (*dist_fisher_z method*), 630
sf() (*dist_fisk method*), 469
sf() (*dist_folded_normal method*), 523
sf() (*dist_frechet method*), 472
sf() (*dist_friedman method*), 889
sf() (*dist_gamma method*), 557
sf() (*dist_gen_beta_exp method*), 624
sf() (*dist_genbeta1 method*), 615
sf() (*dist_genbeta2 method*), 618
sf() (*dist_genlogistic method*), 621
sf() (*dist_genpareto method*), 478
sf() (*dist_geometric method*), 831
sf() (*dist_gev method*), 476
sf() (*dist_gompertz method*), 481
sf() (*dist_gumbel method*), 427
sf() (*dist_half_normal method*), 526
sf() (*dist_halperin_t method*), 721
sf() (*dist_holtsmark method*), 811
sf() (*dist_hotelling_t2 method*), 791
sf() (*dist_hyperexponential method*), 431
sf() (*dist_hypergeometric method*), 850
sf() (*dist_hypoexponential method*), 583
sf() (*dist_invchisquared method*), 561
sf() (*dist_invgamma method*), 565
sf() (*dist_johnson_sb method*), 529
sf() (*dist_johnson_su method*), 532
sf() (*dist_jterpsta_s method*), 879
sf() (*dist_kendall_tau method*), 874
sf() (*dist_kolmogorov_smirnov method*), 803
sf() (*dist_kruskal_wallis method*), 892
sf() (*dist_kumaraswamy method*), 435
sf() (*dist_landau method*), 808
sf() (*dist_laplace method*), 439
sf() (*dist_levy method*), 495
sf() (*dist_lindley method*), 586
sf() (*dist_logistic method*), 443
sf() (*dist_lognormal method*), 498
sf() (*dist_logrv_beta method*), 609
sf() (*dist_logrv_beta_nc_type_II method*), 669
sf() (*dist_logrv_beta_sum method*), 730
sf() (*dist_logrv_chisquared method*), 579
sf() (*dist_logrv_fisher_1mr2 method*), 678
sf() (*dist_lomax method*), 484
sf() (*dist_lrt_s0 method*), 777
sf() (*dist_lrt_x0_s0 method*), 781
sf() (*dist_mann_whitney_u method*), 862
sf() (*dist_mann_whitney_u_lehmann method*), 867
sf() (*dist_mann_whitney_u_milton method*), 870
sf() (*dist_mapairy method*), 816
sf() (*dist_mauchley method*), 759
sf() (*dist_maxwell method*), 569
sf() (*dist_moyal method*), 502
sf() (*dist_nair_t method*), 718
sf() (*dist_nakagami method*), 573
sf() (*dist_negbinom method*), 845
sf() (*dist_nelson_h method*), 724
sf() (*dist_nmax_0 method*), 535
sf() (*dist_nmax_rho method*), 691
sf() (*dist_nmax_rhoij method*), 697
sf() (*dist_nmm_0 method*), 538
sf() (*dist_nmm_rho method*), 694
sf() (*dist_nmm_rhoij method*), 700
sf() (*dist_normal method*), 506
sf() (*dist_normal_range method*), 703
sf() (*dist_page_l method*), 883
sf() (*dist_page_l_nc_milton method*), 886
sf() (*dist_pareto method*), 447
sf() (*dist_pearson_rho method*), 637
sf() (*dist_pearson_rho_nc method*), 665
sf() (*dist_pillai_v method*), 788
sf() (*dist_poisson method*), 835
sf() (*dist_rayleigh method*), 451
sf() (*dist_rice method*), 662
sf() (*dist_roy method*), 785
sf() (*dist_sasnormal method*), 541
sf() (*dist_saspoint5 method*), 821
sf() (*dist_shifted_gompertz method*), 487
sf() (*dist_singh_maddala method*), 490
sf() (*dist_skewnormal method*), 510
sf() (*dist_skewt method*), 634
sf() (*dist_smax method*), 706
sf() (*dist_smm method*), 709
sf() (*dist_stacy method*), 592
sf() (*dist_student_t method*), 606
sf() (*dist_student_t_2nc method*), 682
sf() (*dist_student_t_nc method*), 647
sf() (*dist_studentized_range method*), 727
sf() (*dist_triangular method*), 455
sf() (*dist_truncated_normal method*), 544
sf() (*dist_uniform method*), 459
sf() (*dist_wald method*), 514
sf() (*dist_weibull method*), 463
sf() (*dist_wilcoxon method*), 855
sf() (*dist_wilks_cs method*), 743

sf() (*dist_wilks_iblocks method*), 755
sf() (*dist_wilks_ip method*), 751
sf() (*dist_wilks_lambda method*), 739
sf() (*dist_wilks_lambda_corr method*), 798
sf() (*dist_wilks_lambda_glm method*), 794
sf() (*dist_wilks_lcm method*), 747
sf() (*rv_base method*), 401
sf() (*skewexponpower method*), 589
shanks() (*ctx method*), 997
shape() (*npm method*), 1199
sheppard() (*ctx method*), 978
sheppard_per_cgf() (*ctx method*), 978
shifted_sin_integral() (*math53 method*), 2347
sign() (*ctx method*), 247
signbit() (*ctx method*), 208
signgamma() (*math53 method*), 2285
signtest_pmf_vector() (*ctx method*), 1658
SignPmfVector() (*math53lib method*), 2404
sin() (*ctx method*), 304
sin() (*ctxlib method*), 2380
sin_integral() (*ctx method*), 1559
sinc() (*ctx method*), 316
sincpi() (*ctx method*), 327
sind() (*math53 method*), 2276
sinh() (*ctx method*), 329
sinh_integral() (*ctx method*), 1556
sinhc() (*math53 method*), 2281
sinhmx() (*math53 method*), 2281
SinhSinh() (*ctxboost method*), 931
sinint() (*math53 method*), 2280
sinlemn() (*math53 method*), 2307
sinpi() (*ctx method*), 318
skewness() (*dist_bernoulli method*), 828
skewness() (*dist_holtsmark method*), 813
skewness() (*dist_kolmogorov_smirnov method*), 804
skewness() (*dist_mapairy method*), 818
skewness() (*dist_saspoint5 method*), 823
skewness() (*rv_base method*), 404
skewnormal_cdf() (*math53 method*), 509
skewnormal_pdf() (*math53 method*), 509
skewnormal_qtf() (*math53 method*), 509
SmaxCdf() (*math53lib method*), 2396
SmaxDist() (*math53lib method*), 2396
SmaxPdf() (*math53lib method*), 2396
SmaxQtf() (*math53lib method*), 2396
SmmCdf() (*math53lib method*), 2397
SmmDist() (*math53lib method*), 2397
SmmPdf() (*math53lib method*), 2397
SmmQtf() (*math53lib method*), 2397
sort() (*npm method*), 1226
sort_complex() (*npm method*), 1229
spearman_mu8() (*ctx method*), 1672
spearman_rho_pmf_vector() (*ctx method*), 1659
SpearmanRhoPmfVector() (*math53lib method*), 2403
sph_bessel_in() (*ctx method*), 1482
sph_bessel_in_prime() (*ctx method*), 1485
sph_bessel_jn() (*ctx method*), 1476
sph_bessel_jn_prime() (*ctx method*), 1478
sph_bessel_jn_zero() (*ctx method*), 1480
sph_bessel_kn() (*ctx method*), 1484
sph_bessel_kn_prime() (*ctx method*), 1486
sph_bessel_yn() (*ctx method*), 1477
sph_bessel_yn_prime() (*ctx method*), 1479
sph_bessel_yn_zero() (*ctx method*), 1481
sph_hankel_h1() (*ctx method*), 1491
sph_hankel_h2() (*ctx method*), 1492
spherical_harmonic() (*ctx method*), 1578
split() (*npm method*), 1214
sqr() (*ctx method*), 290
sqrt() (*ctx method*), 257
sqrt1mz2() (*cmath53 method*), 2350
sqrt1pm1() (*ctx method*), 260
sqrt1pmx() (*math53 method*), 2270
squadx() (*ctx method*), 898
square() (*npm method*), 1246
squaredNorm() (*mat method*), 1294
squeeze() (*npm method*), 1207
stack() (*npm method*), 1209
standardized() (*mat method*), 1293
stdev() (*dist_bernoulli method*), 827
stdev() (*dist_holtsmark method*), 812
stdev() (*dist_kolmogorov_smirnov method*), 804
stdev() (*dist_mapairy method*), 817
stdev() (*dist_saspoint5 method*), 822
stdev() (*rv_base method*), 404
StdrangeCdf() (*math53lib method*), 2402
StdrangeDist() (*math53lib method*), 2402
StdrangePdf() (*math53lib method*), 2402
StdrangeQtf() (*math53lib method*), 2402
struve_h() (*ctx method*), 1599
struve_h0() (*math53 method*), 2348
struve_h1() (*math53 method*), 2348
struve_k() (*ctx method*), 1601
struve_l() (*ctx method*), 1600
struve_l0() (*math53 method*), 2348
struve_l1() (*math53 method*), 2348
struve_m() (*ctx method*), 1602
student_t_1sample_power() (*ctx method*), 2410
student_t_1sample_samplesize() (*ctx method*), 2412
student_t_1sample_test() (*ctx method*), 2407
student_t_cdf() (*math53 method*), 605
student_t_nc2_broda_cdf() (*ctx method*), 1671
student_t_nc2_broda_qtf() (*ctx method*), 1672
student_t_nc2_ecf() (*ctx method*), 684
student_t_nc2_ecf_inv() (*ctx method*), 684
student_t_nc_akahira_cl() (*ctx method*), 1670
student_t_nc_benton_cdf_sf() (*ctx method*), 1636
student_t_nc_broda_cdf() (*ctx method*), 1669

student_t_nc_broda_pdf() (*ctx method*), 1669
student_t_nc_cdf() (*math53 method*), 645
student_t_nc_ecf() (*ctx method*), 648
student_t_nc_ecf_inv() (*ctx method*), 648
student_t_nc_harley_qtf() (*ctx method*), 1670
student_t_nc_owen_cdf() (*ctx method*), 1627
student_t_nc_pdf() (*math53 method*), 645
student_t_nc_qtf() (*math53 method*), 645
student_t_owen_cdf() (*ctx method*), 1624
student_t_pdf() (*math53 method*), 605
student_t_qtf() (*math53 method*), 605
studentt_2csamples_ci() (*ctx method*), 2437
studentt_2csamples_power() (*ctx method*), 2439
studentt_2csamples_samplesize() (*ctx method*), 2441
studentt_2csamples_test() (*ctx method*), 2435
studentt_2isamples_ci() (*ctx method*), 2419
studentt_2isamples_equivalence() (*ctx method*), 2426
studentt_2isamples_power() (*ctx method*), 2421
studentt_2isamples_power2() (*ctx method*), 2425
studentt_2isamples_samplesize() (*ctx method*), 2423
studentt_2isamples_test() (*ctx method*), 2417
subtract() (*npm method*), 1244
sum() (*npm method*), 1234
sumap() (*ctx method*), 993
sumem() (*ctx method*), 992
summary() (*mat method*), 1296
superfactorial() (*ctx method*), 1437
support_lower_endpoint() (*Dist method*), 405
support_lower_endpoint() (*dist_bernoulli method*), 828
support_lower_endpoint() (*dist_holtsmark method*), 813
support_lower_endpoint() (*dist_kolmogorov_smirnov method*), 805
support_lower_endpoint() (*dist_mapairy method*), 818
support_lower_endpoint() (*dist_saspoint5 method*), 823
support_upper_endpoint() (*Dist method*), 405
support_upper_endpoint() (*dist_bernoulli method*), 828
support_upper_endpoint() (*dist_holtsmark method*), 813
support_upper_endpoint() (*dist_kolmogorov_smirnov method*), 805
support_upper_endpoint() (*dist_mapairy method*), 818
support_upper_endpoint() (*dist_saspoint5 method*), 823
surd() (*cmathc53 method*), 2351
svd() (*ctx method*), 1306
svd_c() (*ctx method*), 1305
svd_r() (*ctx method*), 1304
swapaxes() (*npm method*), 1203
synchrotron_f() (*math53 method*), 2333
synchrotron_g() (*math53 method*), 2333

T

t() (*ctx method*), 96
t() (*npm method*), 1164
take_along_axis() (*npm method*), 1229
tan() (*ctx method*), 308
tand() (*math53 method*), 2277
tangent_int_2() (*math53 method*), 2315
tanh() (*ctx method*), 333
TanhSinh() (*ctxboost method*), 930
tanpi() (*ctx method*), 321
taylor() (*ctx method*), 973
tensordot() (*npm method*), 1254
tetragamma() (*math53 method*), 2311
tile() (*npm method*), 1216
toroidal_plm() (*ctx method*), 1578
toroidal_qlm() (*ctx method*), 1579
trace() (*mat method*), 1294
transport_jn() (*math53 method*), 2316
transpose() (*npm method*), 1203
trapezoid() (*npm method*), 1238
Trapezoidal() (*ctxboost method*), 927
tri() (*npm method*), 1172
triangular_cdf() (*math53 method*), 454
triangular_pdf() (*math53 method*), 454
triangular_qtf() (*math53 method*), 454
tridiag_eigen(), 1311
trigamma() (*ctx method*), 1394
tril() (*npm method*), 1190
trilog() (*ctx method*), 1402
trim_zeros() (*npm method*), 1221
triu() (*npm method*), 1191
trunc() (*ctx method*), 221
trunc() (*npm method*), 1266

U

ulp() (*ctx method*), 234
uniform_cdf() (*math53 method*), 458
uniform_pdf() (*math53 method*), 458
uniform_qtf() (*math53 method*), 458
unique() (*npm method*), 1221

V

vander() (*npm method*), 1191
var() (*npm method*), 1249
variance() (*dist_bernoulli method*), 827
variance() (*dist_holtsmark method*), 812
variance() (*dist_kolmogorov_smirnov method*), 804
variance() (*dist_mapairy method*), 817
variance() (*dist_saspoint5 method*), 822
variance() (*rv_base method*), 404
vdot() (*npm method*), 1250
vectorize() (*npm method*), 1267
vers() (*math53 method*), 2279
versint() (*math53 method*), 2279
voigt_h() (*math53 method*), 2342
voigt_profile_pdf() (*math53 method*), 2343
voigt_u() (*math53 method*), 2342
voigt_v() (*math53 method*), 2342
vsplit() (*npm method*), 1216

vstack() (*npm method*), 1211

W

wald_cdf() (*math53 method*), 513
wald_pdf() (*math53 method*), 513
wald_qtf() (*math53 method*), 513
weber_e() (*ctx method*), 1604
weibull_cdf() (*math53 method*), 462
weibull_pdf() (*math53 method*), 462
weibull_qtf() (*math53 method*), 462
weierstrass_p_inv_t() (*ctx method*), 1377
weierstrass_p_prime_t() (*ctx method*), 1376
weierstrass_p_t() (*ctx method*), 1375
weierstrass_pe() (*ctx method*), 2358
weierstrass_pe_inv() (*math53 method*), 2360
weierstrass_pe_prime() (*ctx method*), 2358
weierstrass_pg() (*ctx method*), 2353
weierstrass_pg_inv() (*math53 method*), 2357
weierstrass_pg_prime() (*ctx method*), 2354
weierstrass_sigma_e() (*ctx method*), 2359
weierstrass_sigma_g() (*ctx method*), 2356
weierstrass_sigma_t() (*ctx method*), 1379
weierstrass_zeta_e() (*ctx method*), 2359
weierstrass_zeta_g() (*ctx method*), 2355
weierstrass_zeta_t() (*ctx method*), 1378
where() (*npm method*), 1232
whittaker_m() (*ctx method*), 1529
whittaker_w() (*ctx method*), 1530
wilcoxon_bennett_pmf_vector() (*ctx method*), 1658
wilcoxon_ecf() (*ctx method*), 858
wilcoxon_ecf_inv() (*ctx method*), 858
wilcoxon_fm_pmf() (*ctx method*), 1643
wilcoxon_ft() (*ctx method*), 858
wilcoxon_pmf_vector() (*ctx method*), 1658
wilcoxon_spa() (*ctx method*), 858
wilcoxon_spa_inv() (*ctx method*), 858
WilcoxonPmfVector() (*math53lib method*), 2404
wilks_iblocks_bd() (*ctx method*), 758
wilks_iblocks_bd_inv() (*ctx method*), 758
wilks_lambda_bd() (*ctx method*), 742
wilks_lambda_bd_inv() (*ctx method*), 742
wilks_lambda_ecf() (*ctx method*), 741
wilks_lambda_ecf_inv() (*ctx method*), 741
wilks_lambda_glm_chi2_cdf() (*ctx method*), 1691
wilks_lambda_glm_gp() (*ctx method*), 796
wilks_lambda_glm_inv() (*ctx method*), 796
wilks_lambda_glm_mu2_cdf() (*ctx method*), 1699
wilks_lambda_glm_spa() (*ctx method*), 796
wilks_lambda_gp() (*ctx method*), 741
wilks_lambda_ind_chi2_cdf() (*ctx method*), 1693
wilks_lambda_ind_gp() (*ctx method*), 800
wilks_lambda_ind_mu2_cdf() (*ctx method*), 1699
wilks_lambda_ind_spa() (*ctx method*), 800
wilks_lambda_ind_spa_inv() (*ctx method*), 800
wilks_lambda_rao_cdf() (*ctx method*), 1686
wilks_lambda_rao_qtf() (*ctx method*), 1686
wilks_lambda_spa() (*ctx method*), 741
wilks_lambda_spa_inv() (*ctx method*), 741
wright_omega() (*math53 method*), 2273

Z

zbrent() (*ctx method*), 904
zernike_r() (*ctx method*), 1573
zero (*ctx property*), 204
zeroin() (*ctx method*), 905
zeros() (*npm method*), 1169
zeros_like() (*npm method*), 1169
zeta() (*ctx method*), 1439
zeta1p() (*math53 method*), 2317
zeta_cdf() (*math53 method*), 2321
zeta_i() (*math53 method*), 2317
zeta_pmf() (*math53 method*), 2320
zeta_zero() (*ctx method*), 1457
zetam1() (*ctx method*), 1441