


Instructions

Installation


- Source code can be found in the ‘**Source Code**’ folder. Inside that folder, there is a ZIP file named “**SourceCode.zip**”. By extracting that ZIP file, you can find the source code.
- The extracted project folder contains two folders: ‘**client**’ for frontend and ‘**server**’ for backend.
- To install the client packages, inside the client folder, run the terminal command “***npm install***”.
 - Then, to start the client server, run the command “***npm run dev***”. Vite will start the React server on “http://localhost:5173/” (port number can be different).
- To install the server packages, inside the server folder, run the terminal command “npm install”.
 - Then, to start the backend server, run the command “***npm run dev***”. It will start the node server on “http://localhost:3000/”.
- MongoDB Atlas was used as the database solution; hence, there's no need to configure anything. The connection URL can be found in the .env file. It's also commented on the server/index.js file for your convenience.

How to use

- Click to add new location

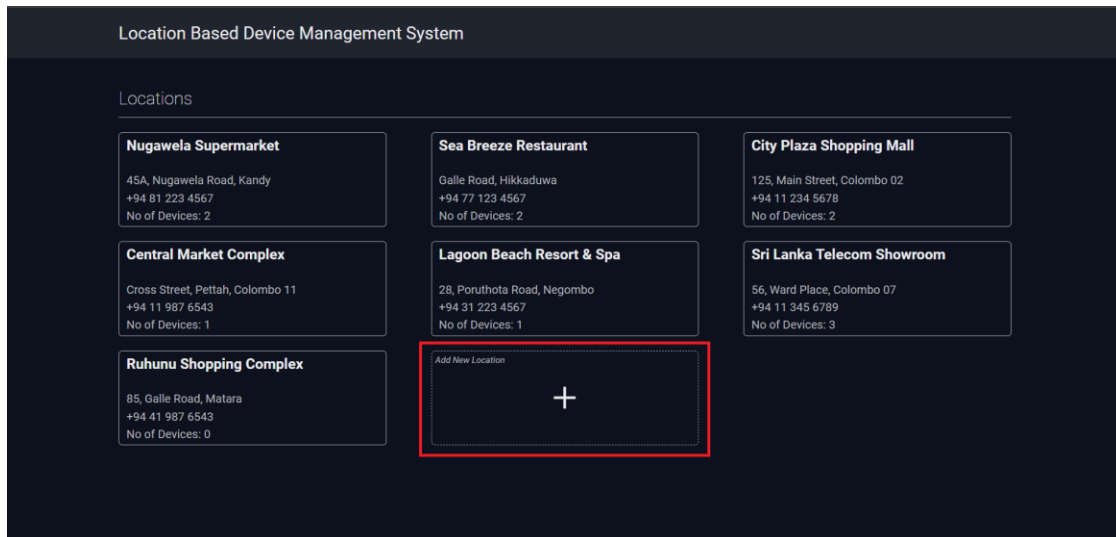

- Click to,
 - 1 – Add new device
 - 2 – Remove the device
 - 3 – Change the status of the device (Green indicates the Active status)

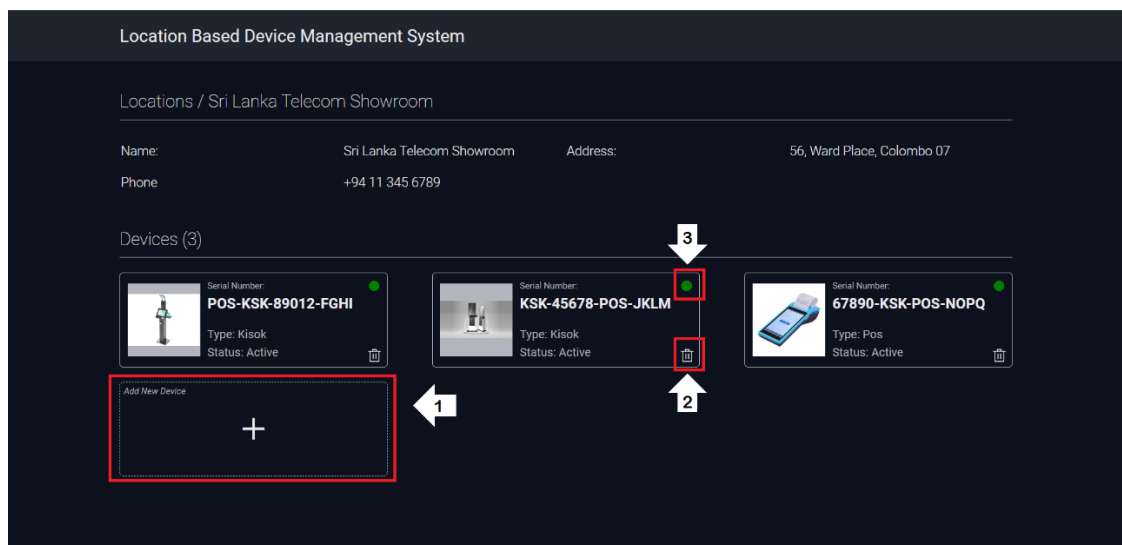

Thank you.