Entry points

Expose the two entry points that feed the pipeline: the dev message route for single events and the bulk import worker for CSV files.


2 tasks | Requires Wave 02, 04 | Unlocks Wave 06, 07

Why this wave exists

Both entry points reuse one pipeline. This is what keeps the bulk path and the event path consistent.

How it fits

The diagram shows this wave's tasks, the earlier-wave tasks they depend on, and the later-wave tasks that depend on them.

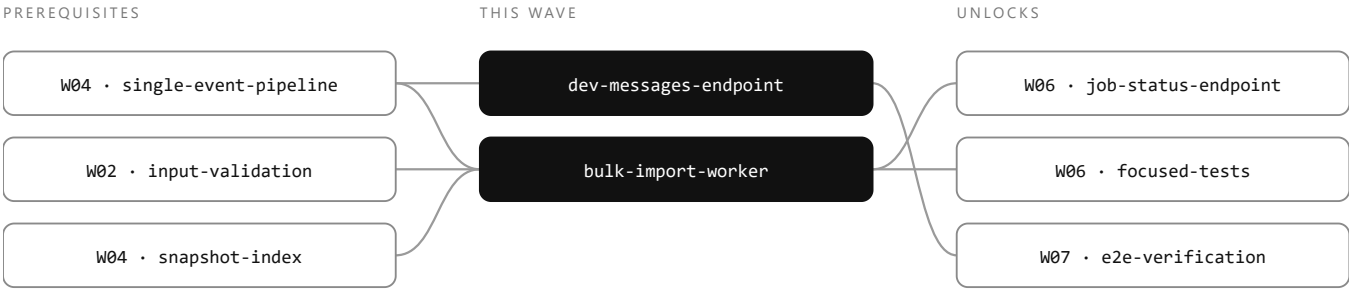

Hand-off. Wave 6 exposes the job status API and writes the focused tests against this behaviour.

Tasks

Exposing POST /_dev/messages

`dev-messages-endpoint`

Depends on: single-event-pipeline

Expose POST /_dev/messages. It parses a SellerInventoryChanged body and calls the same consumer adapter and pipeline the real consumer uses, with no duplicated logic. Enable it when ENABLE_DEV_ROUTES=true or NODE_ENV is not production. Return the pipeline result as JSON.

`src/consumers/stockChangedHandler.ts` · `src/routes/devMessages.ts`

- [ ] Posting `wiremock/__files/sample-event.json` returns APPLIED on the first call and SKIPPED_STALE on an identical replay.
- [ ] The route is absent when dev routes are disabled.

Implementing bulk import worker

`bulk-import-worker`

Depends on: input-validation, single-event-pipeline, snapshot-index

Implement POST /v1/availability/imports. It validates the CSV header, stores the job as QUEUED and returns 202 with a jobId. An in-process worker loads the snapshot once per country, reads rows in chunks of CHUNK_SIZE (default 500), runs each row through the pipeline with at most CONCURRENCY rows in flight (default 8), and writes one import_rows entry per row. Invalid rows become failed with a line number. Stale rows become skipped and never fail the upload. Final state is COMPLETED, or COMPLETED_WITH_ERRORS if any row failed. Jobs left RUNNING at startup are re-queued.

`src/imports/bulkImportWorker.ts · src/routes/imports.ts`

- [ ] A stale row alone does not reject the upload.
- [ ] The counters equal the number of import_rows entries when the job completes.
- [ ] Duplicate keys in one file are processed in row order.

Risks and decisions

- The worker processes the CSV in chunks of CHUNK_SIZE (default 500). It must not hold all results in memory.
- CONCURRENCY (default 8) protects WireMock and the gateway. Keep it configurable.

Verification

```
npm run typecheck
npm test
npm start   (then POST /_dev/messages with wiremock/__files/sample-event.json)
```

Done when

1. Every acceptance box is checked and the verification commands pass.
2. The session todos for this wave are marked done.
3. The final message includes a hand-off note for the next wave.

Agent brief for this wave: AGENT.md in the same folder.