API and tests

Complete the bulk contract with the job status endpoint and lock in the business rules with focused tests.


2 tasks | Requires Wave 04, 05 | Unlocks Wave 07

Why this wave exists

The tests fix the rules before the end-to-end run, so any later failure points to a contract mismatch and not to a rule that was never agreed.

How it fits

The diagram shows this wave's tasks, the earlier-wave tasks they depend on, and the later-wave tasks that depend on them.

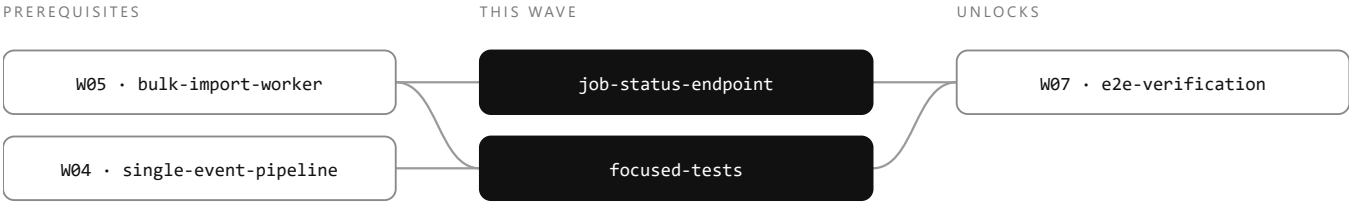

Hand-off. Wave 7 runs everything against the real WireMock mocks.

Tasks

Exposing job status endpoint

`job-status-endpoint`

Depends on: bulk-import-worker

Expose GET /v1/availability/imports/{jobId}. It returns state, totalProcessed, succeeded, failed, skipped and a paginated list of row errors (lineNumber and reason) using limit and offset query parameters. An unknown jobId returns 404.

`src/routes/jobStatus.ts`

- [ ] Counters come from import_jobs and agree with import_rows.
- [ ] Errors are returned in a stable order by lineNumber.

Writing focused tests

`focused-tests`

Depends on: bulk-import-worker, single-event-pipeline

Write unit and integration tests with injected clients and a small fake HTTP server, not WireMock. Cover: the version rule; stale rows in a bulk upload do not fail it; replay by eventId is idempotent; 404, inactive product and disabled country are terminal; 429 honours Retry-After; 503 retries and then fails; a publish failure after a successful gateway write is retried by the outbox and the event is not lost.

`test/pipeline.test.ts · test/bulk.test.ts · test/outbox.test.ts · test/clients.test.ts`

- [ ] npm test passes without Docker.
- [ ] Every fault input in the README has at least one test.

Risks and decisions

- Tests must not depend on Docker. Use injected clients and a small fake HTTP server.
- Retry tests use an injected sleep so they stay fast.

Verification

```
npm test
npm run typecheck
```

Done when

1. Every acceptance box is checked and the verification commands pass.
2. The session todos for this wave are marked done.
3. The final message includes a hand-off note for the next wave.

Agent brief for this wave: AGENT.md in the same folder.