


## Exercise 6

```
Terminal
[05/09/2017 23:17] seed@ubuntu:~$ sudo nano /etc/php5/apache2/php.ini
[sudo] password for seed:
[05/09/2017 23:18] seed@ubuntu:~$ sudo service apache2 restart
* Restarting web server apache2
... waiting [ OK ]
[05/09/2017 23:18] seed@ubuntu:~$ sudo nano /etc/hosts
[05/09/2017 23:19] seed@ubuntu:~$
```

Logged in as User Ted without providing his password.

Username: ted');#



This is possible because by adding the '); we are able to end the code and comment out the rest of the code which ultimately allows us to bypass the password.

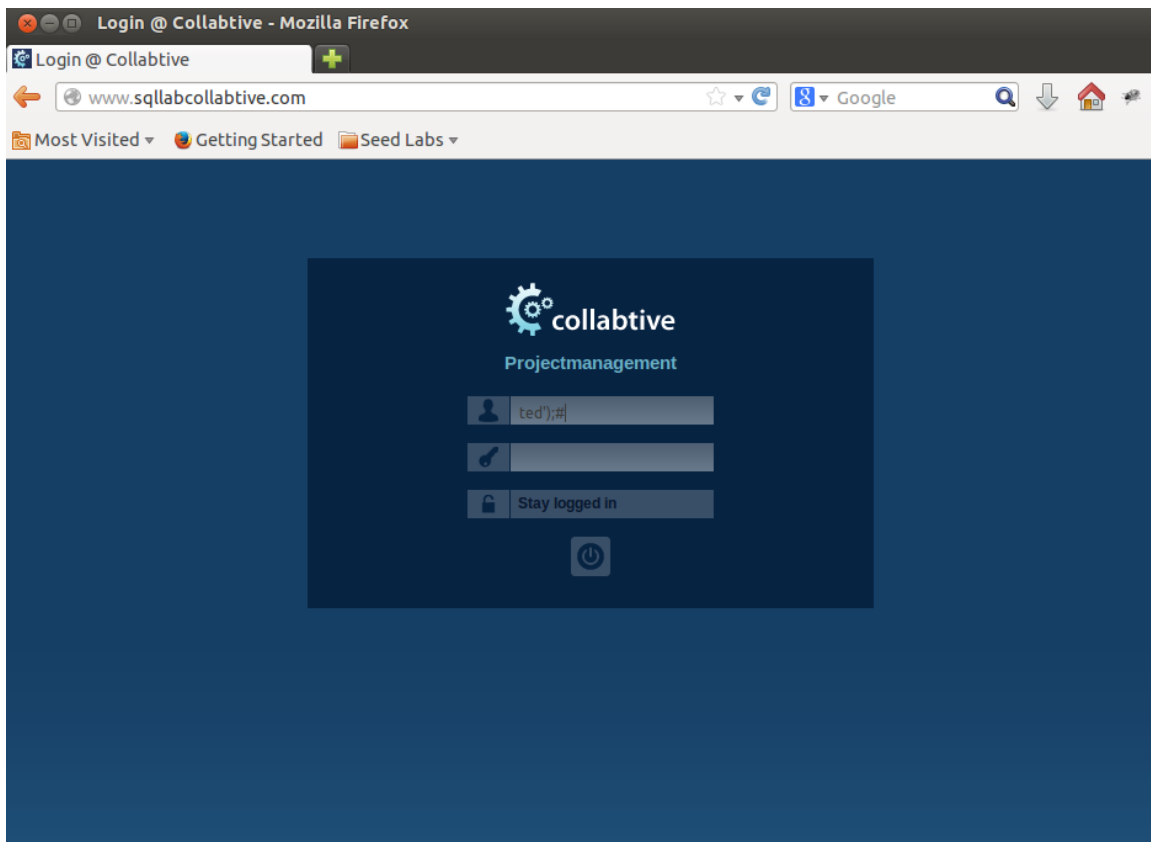

Logged in as User Admin without providing a password.

Username: admin');#


This is the same for admin.

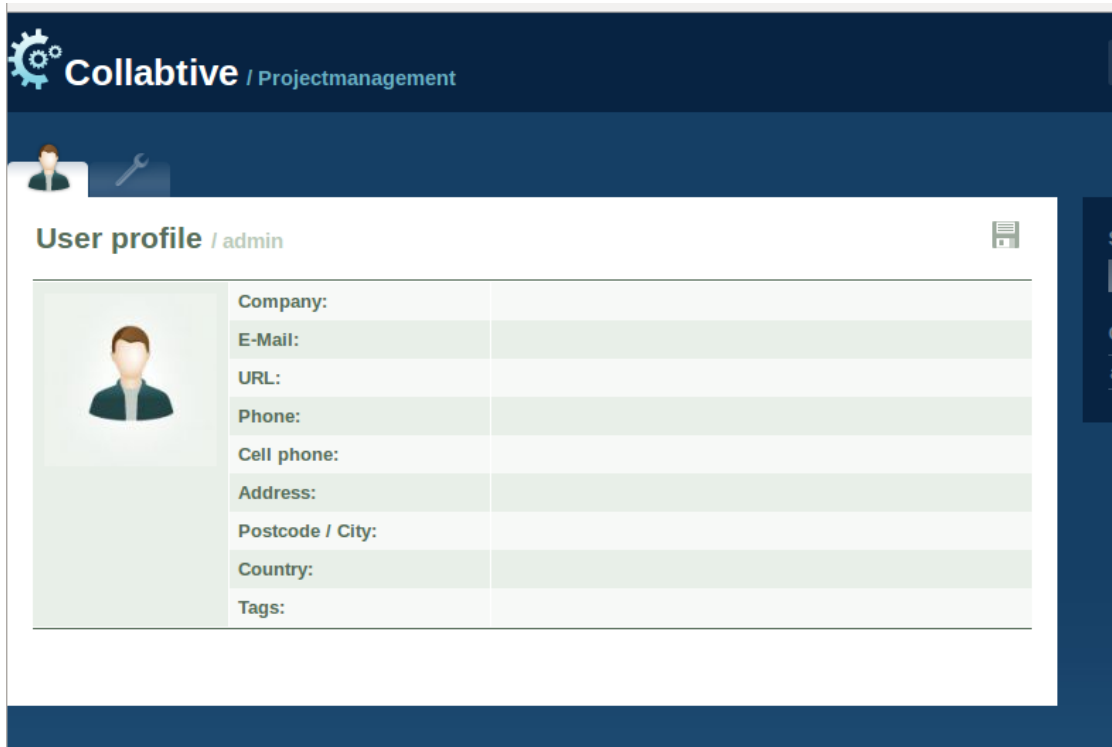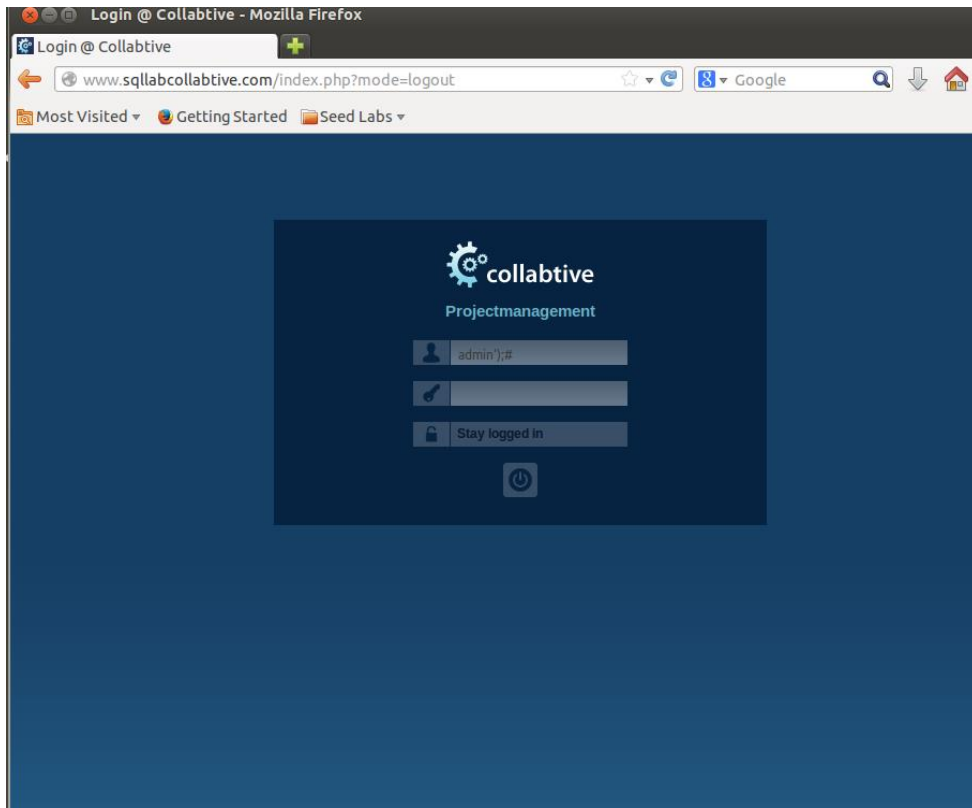

Logged in as a blank username.

Username: ' OR name = name);#

Account information shows up as admin.

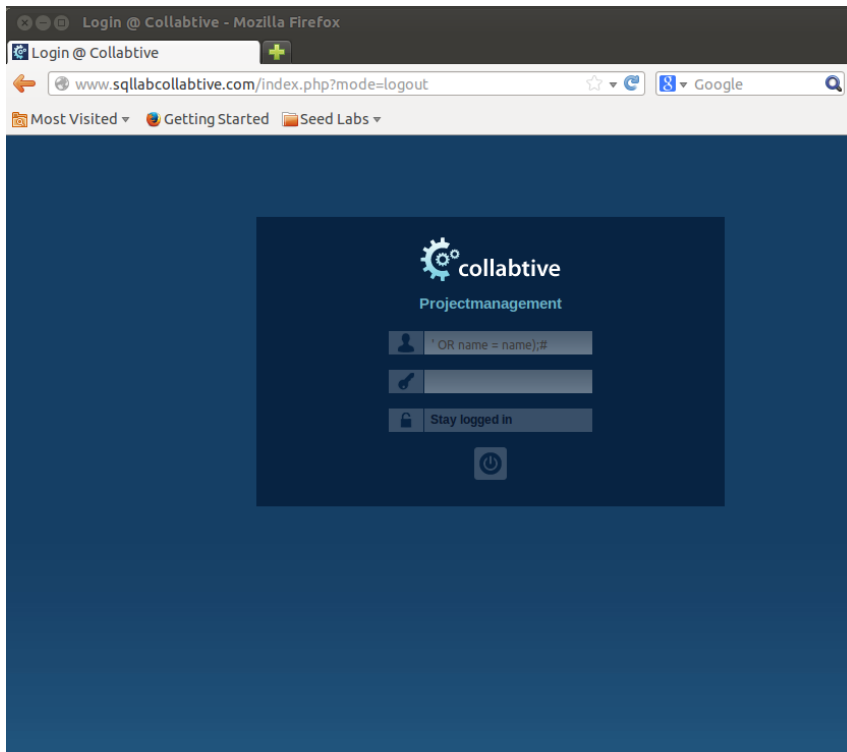

## User profile / admin

	Company:	
	E-Mail:	
	URL:	
	Phone:	
	Cell phone:	
	Address:	
	Postcode / City:	
	Country:	
	Tags:	

