# The LaTeX report

**Generated by mdias on 07 September 2026, 17:07:01**

This report has been generated automatically by MadAnalysis 5.

Please cite:

> **E. Conte, B. Fuks and G. Serret**,
> *MadAnalysis 5, A User-Friendly Framework for Collider Phenomenology*,
> Comput. Phys. Commun. **184** (2013) 222-256,
> arXiv:1206.1599 [hep-ph].

To contact us:


> **http://madanalysis.irmp.ucl.ac.be**
> **ma5team@iphc.cnrs.fr**

## Contents

**1 Setup** **2**
1.1 Command history 2
1.2 Configuration 2

**2 Datasets** **3**
2.1 sample 3

**3 Histos and cuts** **4**
3.1 Histogram 1 4

# 1 Setup

## 1.1 Command history

```
ma5>import unweighted_events.lhe as sample
ma5>define e = e+ e-
ma5>plot PT(e+[1])
ma5>submit
```

## 1.2 Configuration

- MadAnalysis version 1.11.0 (2025/04/23).
- Histograms given for an integrated luminosity of $10 \text{fb}^{-1}$.

## 2 Datasets

### 2.1 sample

- Sample consisting of: signal events.
- Generated events: 10000 events.
- Normalization to the luminosity: 8410400+/- 18348 events.
- Ratio (event weight): 841 - warning: please generate more events (weight larger than 1)!

| Path to the event file | Nr. of events | Cross section (pb) | Negative wgts (%) |
|---|---|---|---|
| unweighted_events.lhe | 10000 | 841 @ 0.22% | 0.0 |

## 3 Histos and cuts

### 3.1 Histogram 1

*** Plot: PT ( e+[1] )**

| Dataset | Integral | Entries per event | Mean | RMS | % underflow | % overflow |
|---|---|---|---|---|---|---|
| sample | 0.0 +/- 0.0 | 0. | 0.0 | 0.0 | 0.0 | 0.0 |

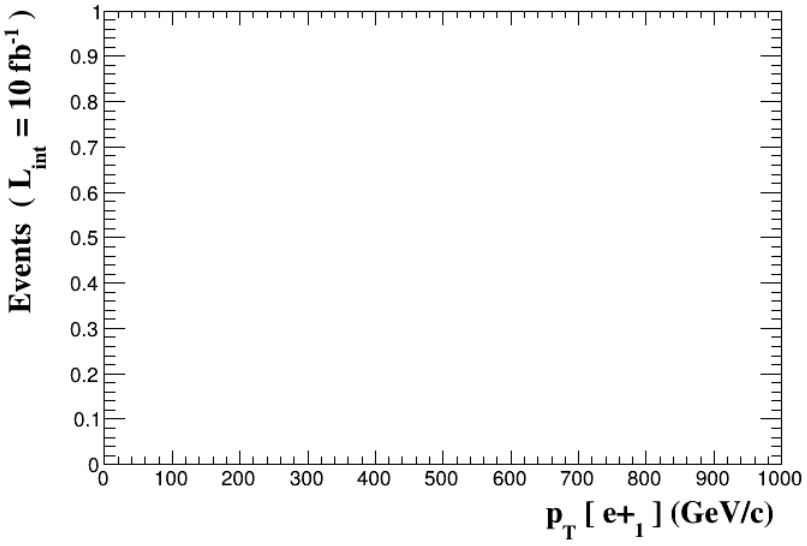



**Figure 1**.