

AdmoreSDKDeepLink 使用说明

说明

1. appID: app在《多点广告开放平台》的唯一ID
2. appKey: 为了避免您的appID暴露, 使用appKey用于交互
3. scheme头: 《多点广告开放平台》分配, 比如 `am1234://`, 需要在app的工程文件的 `URL Types` 项里添加: `identifier: admore`, `URL Schemes: am1234`
4. idfa: sdk中使用了idfa, 请在提交appstore审核时注意

使用方法


1. 将AdmoreSDK.h 和 AdmoreSDK.m放入工程,
2. 或者使用Pod安装方式: `pod 'AdmoreSDKDeepLink', :git => 'https://github.com/duodiankeji/deeplink.git'`
3. 在您的AppDelegate中override `application:openURL:options:` 方法, 调用AdmoreSDK的 `handleUrl:withAppId:`:

```
- (BOOL) application:(UIApplication *)app openURL:(NSURL *)url options:(NSDictionary<UIApplicationOpenURLOptionsKey,id> *)options {  
  
    if( [AdmoreSDKDeepLink handleUrl:url withAppkey:@"1234"] ) {  
        return YES;  
    }  
    //处理您的其他逻辑  
    return NO;  
  
    //或者直接 return [AdmoreSDKDeepLink handleUrl:url withAppkey:@"1234"];  
}
```

如果您的app只支持ios9(含)以上版本, 只需添加以上函数即可。如果需要支持ios9以下, 则 `application:handleOpenURL:` 也需要处理

```
- (BOOL)application:(UIApplication *)application handleOpenURL:(NSURL *)url {  
  
    if( [AdmoreSDKDeepLink handleUrl:url withAppkey:@"1234"] ) {  
        return YES;  
    }  
    //处理您的其他逻辑  
    return NO;  
  
    //或者直接 return [AdmoreSDKDeepLink handleUrl:url withAppkey:@"1234"];  
}
```

流程

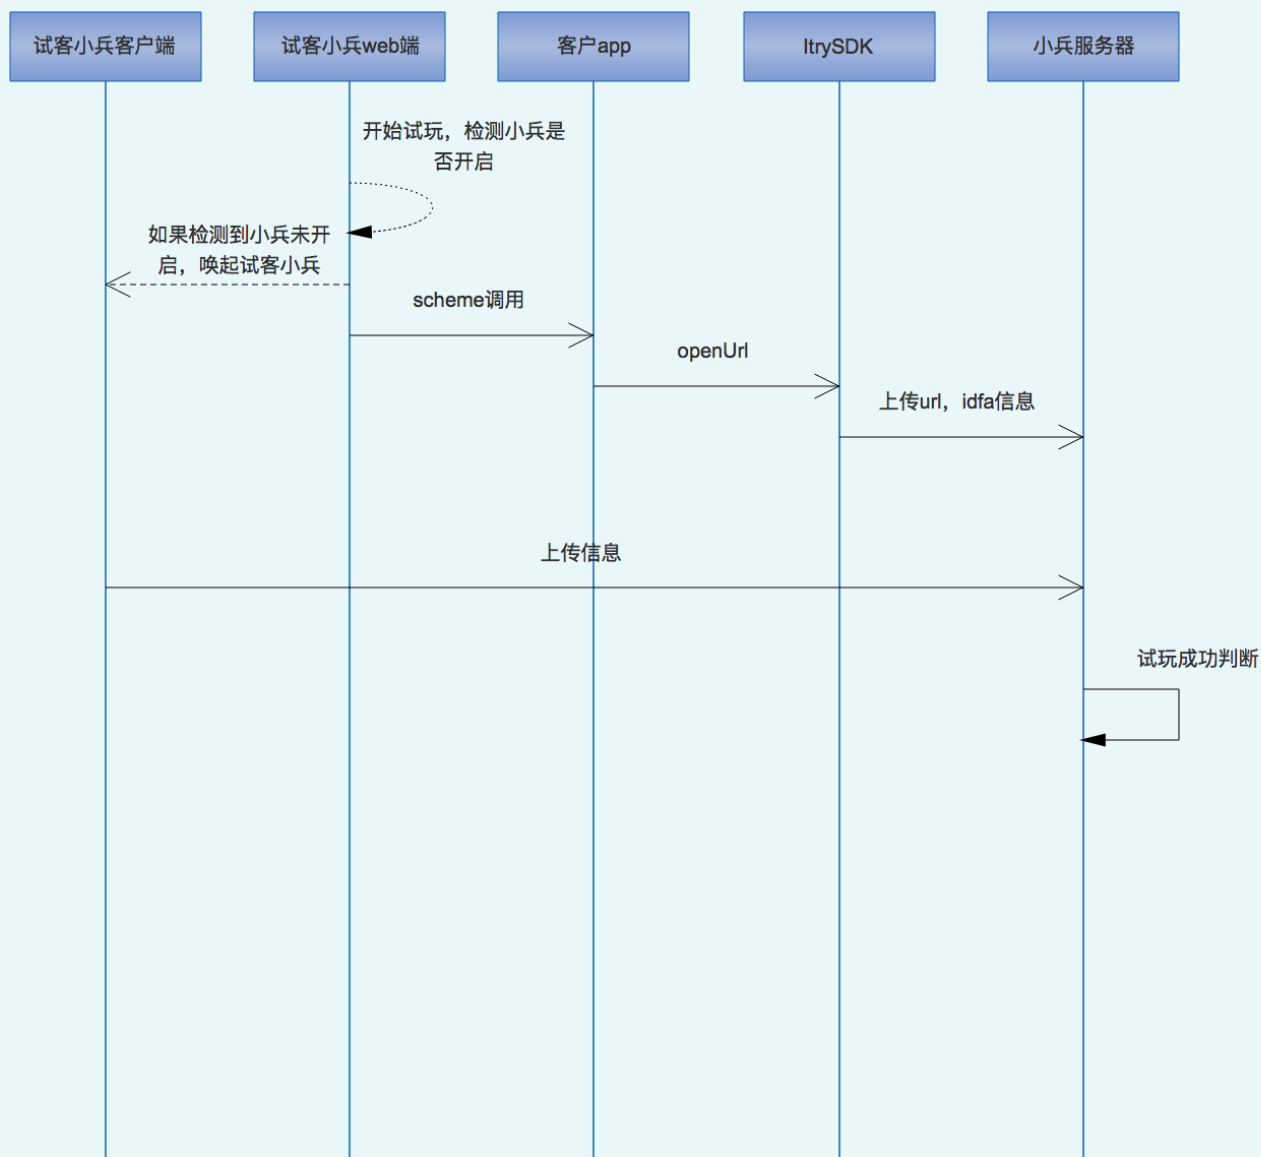

关于上传接口(地址待定)

1. 使用get方式上传, 形式如下:

```
https://itry.com/admoresdk/info?a=appkey&t=uploadtime&i=info
```

示例:

```
https://itry.com/admoresdk/info?a=1234&t=1484116404&i=b01308a20167267e3dceb548c134fbb2f36dbb1c2f6cfeef0eda79a2c4eb1b4253002798993f780ea85221ab4c61cb567d6a4bcb4f3438b484dc32fe41042bf1dd385c44c2de2a151c23ea88c60b70a5f74ecb5a1e13fd2633a35df0c0392e45938ab2290a862b05ab95ed64b8605a77
```

info为json的aes加密后的二进制字符串,

aes key: "https://itry.com/admoresdk/info?a=appkey&t=uploadtime" 的 md5值 (32位)

json:

```
{  
  "url" : "am1234:\\\\start?session=12&time=123",  
  "idfa" : "F4F9A60C-A5AC-4D26-B168-247A66C34A3D"  
}
```

Author

mkoo, wanglin.sun@duodian.com

License

Copyright © 2017 北京多点科技股份有限公司. All Rights Reserved