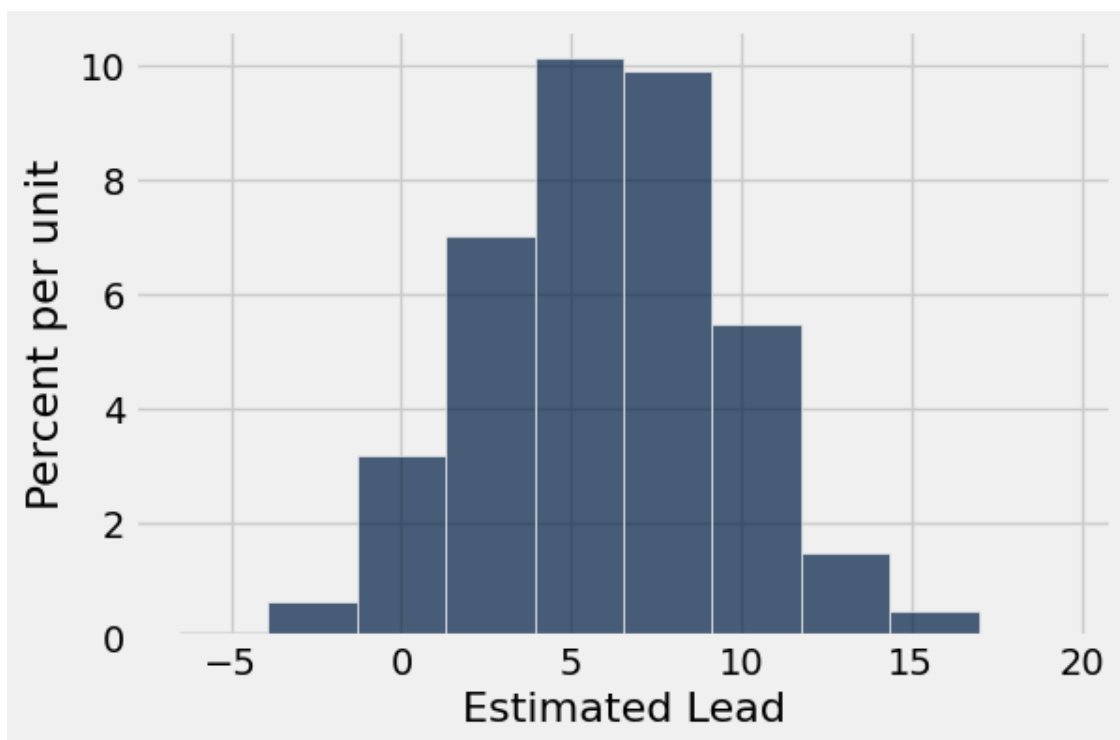

Question 1.5. Write a function called `leads_in_resamples` that returns an array of 2023 elements representing the bootstrapped estimates (the result of calling `one_resampled_difference`) of Imm Thai's lead over Lucky House, Thai Temple, and Thai Basil combined. Afterwards, run the cell to plot a histogram of the resulting samples. **(8 Points)**

Hint: If you see an error involving `NoneType`, consider what components a function needs to have!

```
In [26]: def leads_in_resamples():
          arr = make_array()
          for _ in np.arange(2023):
              arr = np.append(arr, one_resampled_difference(votes))
          return arr

sampled_leads = leads_in_resamples()
Table().with_column('Estimated Lead', sampled_leads).hist("Estimated Lead")
```



Question 2.1. Jonathan also created 70%, 90%, and 99% confidence intervals from the same sample, but he forgot to label which confidence interval represented which percentages! ***First, match each confidence level (70%, 90%, 99%) with its corresponding interval in the cell below*** (e.g. ____ % CI: [52.1, 54] → replace the blank with one of the three confidence levels). ***Then, explain your thought process*** and how you came up with your answers. **(10 Points)**

The intervals are below:

- [50.03, 55.94]
- [52.1, 54]
- [50.97, 54.99]

Hint: If you are stuck on this question, try looking over Chapters [13.3](#) and [13.4](#) of the textbook.

- 99% [50.03, 55.94]
- 70% [52.1, 54]
- 90 % [50.97, 54.99]

