5. Create <u>Register</u> function

+ Add a controller with controller name: **UserController**

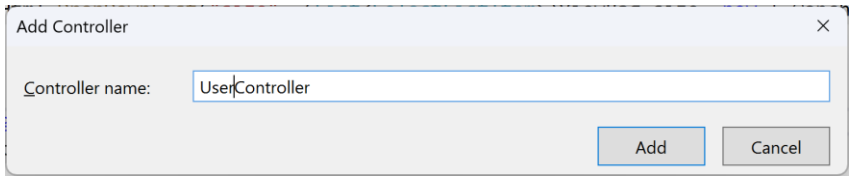

+ Code in UserController.cs file

```
public class UserController : Controller
 {
     // GET: User
     dbBookStoreDataContext db = new dbBookStoreDataContext();
     [HttpGet]
     public ActionResult Register()
     {
         return View();
     }
     [HttpPost]
     public ActionResult Register(FormCollection collection, customer c)
     {
         var name = collection["customer_name"];
         var username = collection["username"];
         var password = collection["password"];
         var confirmpassword = collection["confirmpassword"];
         var email = collection["email"];
         var address = collection["address"];
         var numberphone = collection["numberphone"];
         var dob = String.Format("{0:MM/dd/yyyy}", collection["dob"]);

         if (String.IsNullOrEmpty(confirmpassword))
         {
             ViewData["enterpassword"] = "Must enter password to confirm!";
         }
         else
         {
             if (!password.Equals(confirmpassword))
             {
                 ViewData["samepassword"]="Password and confirmation password must
                 be the same";
             }
             else
             {
                 c.customer_name = name;
                 c.username = username;
                 c.password = password;
                 c.email = email;
                 c.address = address;
                 c.numberphone = numberphone;
                 c.dob = DateTime.Parse(dob);
                 db.customers.InsertOnSubmit(c);
                 db.SubmitChanges();
                 return RedirectToAction("Register");
             }
         }
         return this.Register();
     }
    }
```

+ Add Register view:

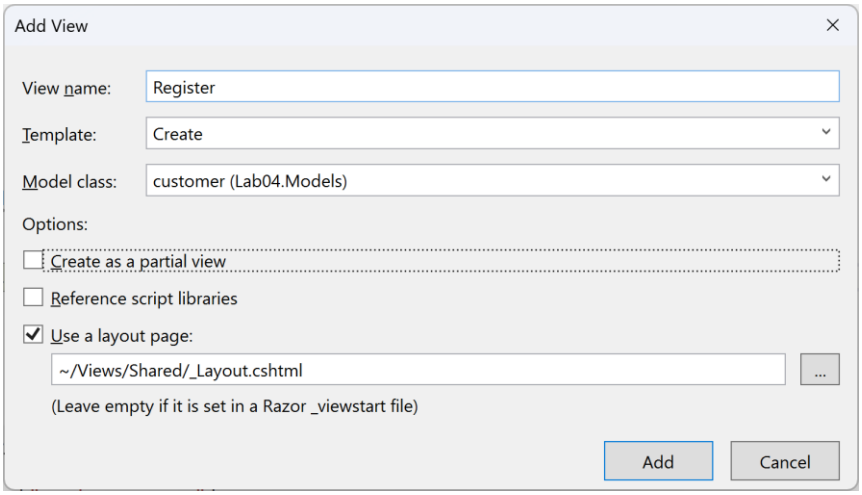

+ Add layout to type confirm password in Register.cshtml

```
<div class="form-group">
    <label class="control-label col-md-2" for="comfirmpassword">confirm password: </label>
    <div class="col-md-10">
          <input class="form-control text-box single-line input-validation-error" data-
          val="true" data-val-required="Must enter password to confirm!"
          id="confirmpassword" name="confirmpassword" type="password" value="" aria-
          describedby="confirmpassword-error" aria-invalid="true">
        @ViewData["enterpassword"]
        @ViewData["samepassword"]
    </div>
 </div>
```

+ Result of Register view

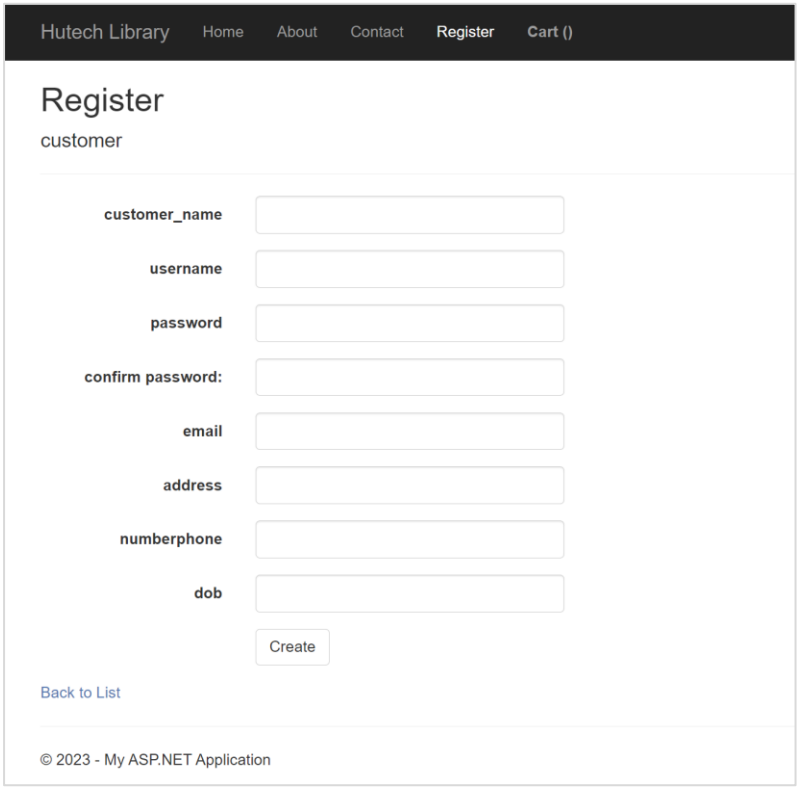

+ Type information on Register form and check Customer table in BookStore

Results | Messages

	customer_id	customer_name	username	password	email	address	numberphone	dob
1	1	customer 1	customer1	123456	customer1@gmail.com	456 dien bien phu	0987654321	2000-06-05 00:00:00

6. Create Login function

+ Open Models>UserController.cs and add code:

```
[HttpGet]
 public ActionResult Login()
 {
      return View();
 }
 [HttpPost]
 public ActionResult Login(FormCollection collection)
 {
      var username = collection["username "];
      var password = collection["password"];
      customer c = db.customers.SingleOrDefault(n => n.username == username &&
n.password == password);
      if (c != null)
      {
          ViewBag.ThongBao = "Congratulations on successful login";
          Session["User"] = c;
      }
      else
      {
          ViewBag.ThongBao = "Username or password is incorrect";
      }
      return RedirectToAction("Home", "Book");
 }
```

+ Add Login view:

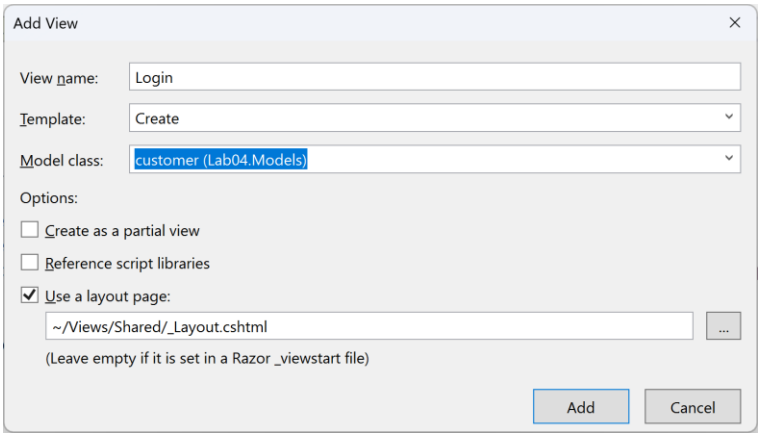

+ Login view:

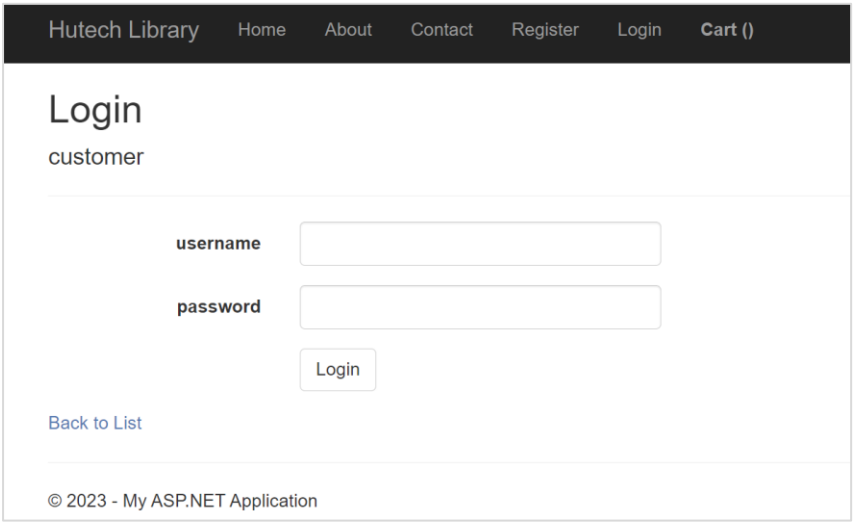

7. Create “Place an order” function

+ Open CartController and add code:

```
[HttpGet]
public ActionResult PlaceOrder()
{
    if (Session["User"] == null || Session["User"].ToString() == "")
    {
        return RedirectToAction("Login", "User");
    }
    if (Session["Cart"] == null)
    {
        return RedirectToAction("Index", "Book");
    }
    List<Cart> lstCart = getCart();

    ViewBag.sumQuantity = sumQuantity();
    ViewBag.Total = Total();
    ViewBag.sumProductQuantity = sumProductQuantity();

    return View(lstCart);
}
public ActionResult PlaceOrder(FormCollection collection)
{
    order dh = new order();
    customer kh = (customer)Session["User"];
    book s = new book();

    List<Cart> gh = getCart();
    var delivery_date= String.Format("{0:MM/dd/yyyy}",collection["delivery_date"]);

    dh.customer_id = kh.customer_id;
    dh.order_date = DateTime.Now;
    dh.delivery_date = DateTime.Parse(delivery_date);
    dh.isship = false;
    dh.ispayment = false;

    db.orders.InsertOnSubmit(dh);
    db.SubmitChanges();

    foreach (var item in gh)
    {
        orderdetail ctdh = new orderdetail();

        ctdh.order_id = dh.order_id;
        ctdh.book_id = item.book_id;
        ctdh.quantity = item.iquantity;
        ctdh.price = (decimal)item.price;

        s = db.books.Single(n => n.book_id == item.book_id);
        s.quantity_instock -= ctdh.quantity;
        db.SubmitChanges();

        db.orderdetails.InsertOnSubmit(ctdh);
    }
    db.SubmitChanges();
    Session["Cart"] = null;
    return RedirectToAction("ConfirmOrder", "Cart");
  }
```

+ Add PlaceOrder view:

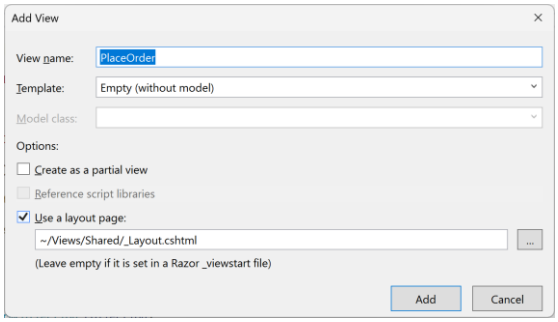

+ Layout PlaceOrder view: Use layout view of Cart.cshtm + layout of place an order

```
@model IEnumerable<Lab04.Models.Cart>
@{
    ViewBag.Title = "Cart";
    Layout = "~/Views/Shared/_Layout.cshtml";
}
<h2>Your Cart</h2>
<table class="table">
    <tr>
        <th>@Html.DisplayNameFor(model => model.book_name)</th>
        <th>@Html.DisplayNameFor(model => model.image)</th>
        <th>@Html.DisplayNameFor(model => model.price)</th>
        <th>@Html.DisplayNameFor(model => model.iquantity)</th>
        <th>@Html.DisplayNameFor(model => model.Total)</th>
        <th></th>
        <th></th>
    </tr>
    @foreach (var item in Model)
    {
        <tr>
            <td> @Html.DisplayFor(modelItem => item.book_name) </td>
            <td> <img src="@item.image" width="180" /> </td>
            @using (Html.BeginForm("CartUpdate", "Cart", new { @id = item.book_id }))
            {
                <td> @String.Format("{0:0,0}", item.price) USD </td>
                <td> <input type="number" min="1" name="txtQuantity"
                       value="@item.iquantity"/> </td>
                <td> @Html.DisplayFor(modelItem => item.Total) </td>
                <td>
                 <a href="@Url.Action("Detail","Book",new{id=item.book_id})"> Detail</a> |
@Html.ActionLink("Delete", "CartDelete", new { @id = item.book_id })
                </td>
                <td>
                    <input type="submit" value="Update" class="btn btn-success" />
                 </td>
            }
        </tr>
    }
    <tr style="font-weight:bold; text-align:left; color:red">
        <td colspan="2"> Quantity Sum: @ViewBag.sumProductQuantity </td>
        <td colspan="2"> Quantity Total: @ViewBag.sumQuantity </td>
        <td colspan="4"> Total: @String.Format("{0:0,0}", @ViewBag.Total) USD </td>
    </tr>
    <tr style="font-weight:bold; color:blue; text-align:right ">
        <td colspan="5">
            @Html.ActionLink("Cart Delete", "AllCartDelete")
        </td>
    </tr>
    <tr style="font-weight:bold; color:yellow; text-align:right ">
        <td colspan="5">
            @Html.ActionLink("Back to Cart", "Cart", "Cart")
        </td>
    </tr>
</table>
```

```
@using Lab04.Models
<h2 style="text-align:center">Information of Place an order</h2>
@{
    customer kh = (customer)Session["User"];
}
<table align="center">
    @using (Html.BeginForm())
    {
        @Html.ValidationSummary(true)
        <tr style="height:40px">
            <td>Customer name: </td>
            <td style="font-weight:bold">@kh.customer_name</td>
        </tr>
        <tr style="height:40px">
            <td>Email: </td>
            <td style="font-weight:bold">@kh.email</td>
        </tr>
        <tr style="height:40px">
            <td>Address: </td>
            <td style="font-weight:bold">@kh.address</td>
        </tr>
        <tr style="height:40px">
            <td>Number phone: </td>
            <td style="font-weight:bold">@kh.numberphone</td>
        </tr>
        <tr style="height:40px">
            <td>Order date: </td>
            <td style="font-weight:bold">@DateTime.Now.ToShortDateString()</td>
        </tr>
        <tr style="height:40px">
            <td>Delivery date: </td>
            <td style="font-weight:bold">
                <input type="date" name="delivery_date" />
            </td>
        </tr>
        <tr style="height:40px">
            <td></td>
            <td style="font-weight:bold">
                <input type="submit" value="Confirm" class="btn btn-success" />
            </td>
        </tr>
    }
</table>
```

+ Result of PlaceOrder view:

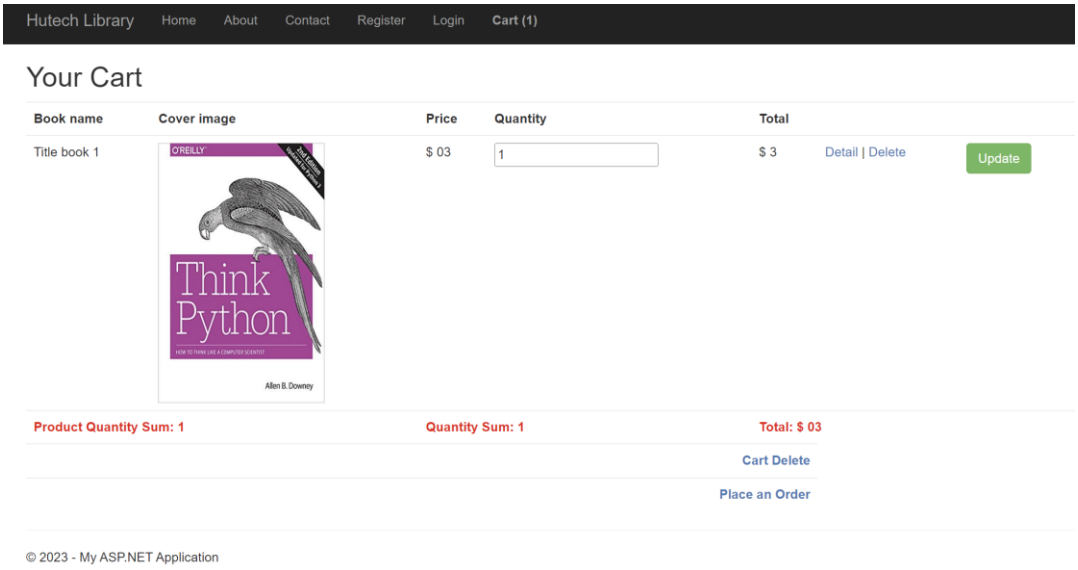

+ View PlaceOrder after click “Place an Order” button:

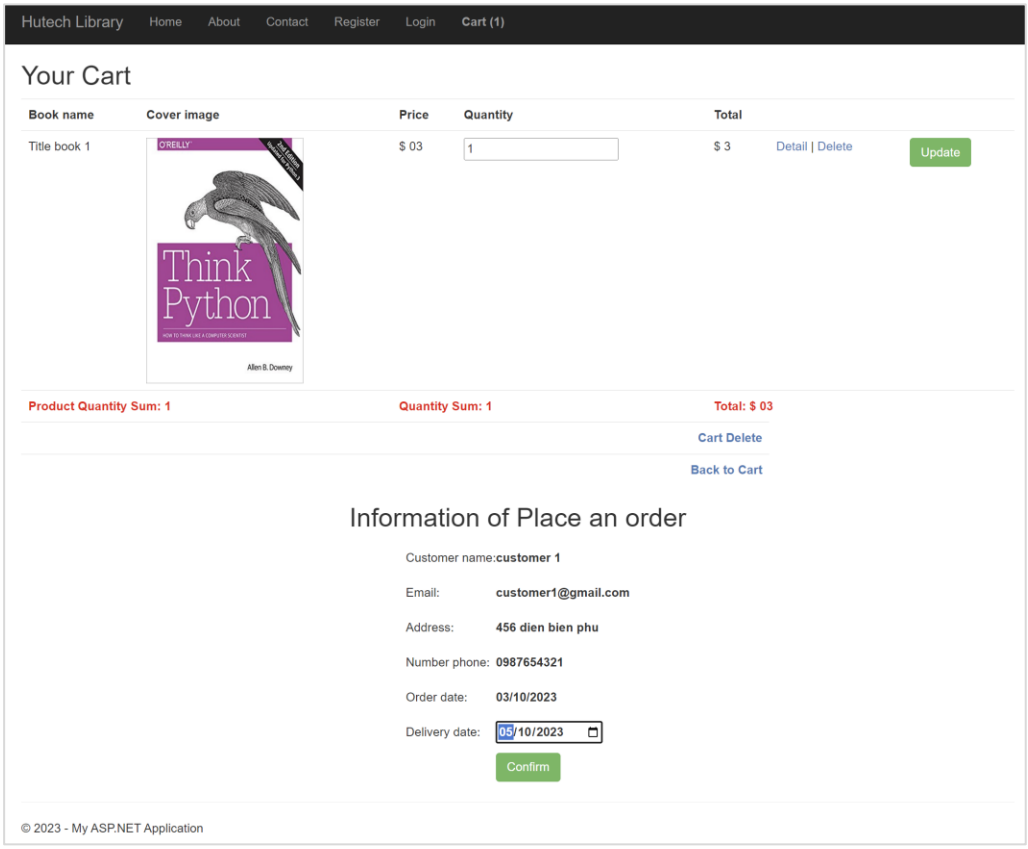

+ Add code in CartController.cs and Add ConfirmOrder view:

```
public ActionResult ConfirmOrder()
{
    return View();
}
```

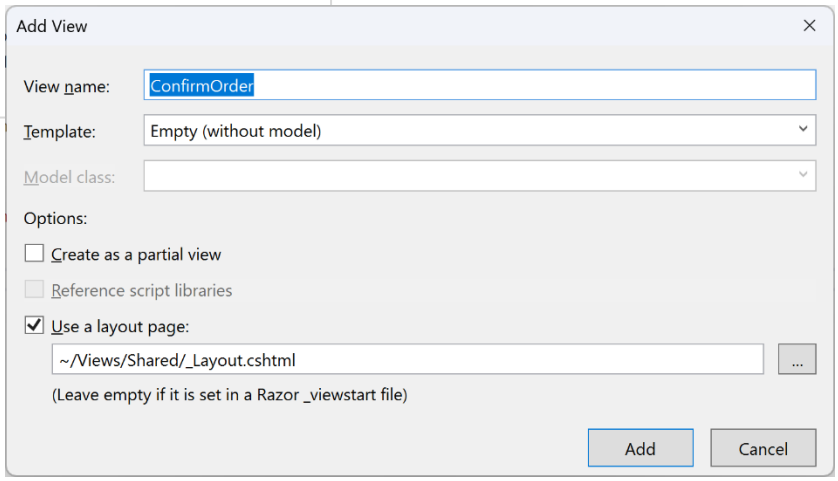

+ Layout ConfirmOrder view:

```
@{
    ViewBag.Title = "ConfirmOrder";
    Layout = "~/Views/Shared/_Layout.cshtml";
}

<h2>Confirm Order</h2>
<h2>Order has been confirmed</h2>
<h3> We will deliver your order as soon as possible!</h3>
<p>
    @Html.ActionLink("Back to Home", "Home", "Book")
</p>
```

+ Result of ConfirmOrder view:

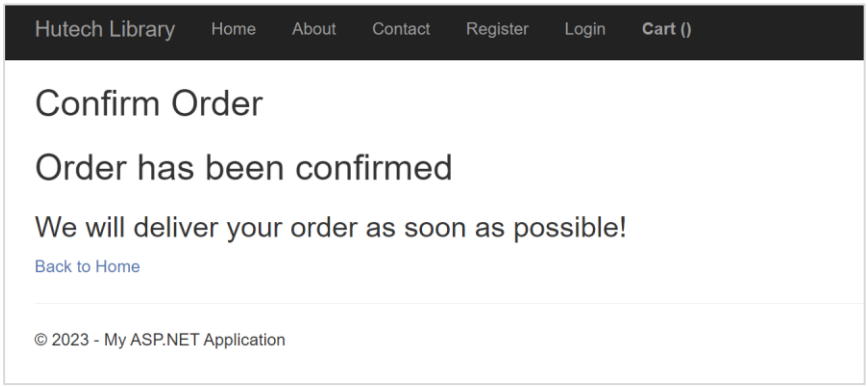

+ Check data of Pacle an Order in database:

Results | Messages

	customer_id	customer_name	username	password	email	address	numberphone	dob
1	1	customer 1	customer1	123456	customer1@gmail.com	456 dien bien phu	0987654321	2000-06-05 00:00:00

	order_id	ispayment	isship	order_date	delivery_date	customer_id
1	1	0	0	2023-10-03	2023-10-12	1

	order_id	book_id	quantity	price
1	1	1	1	3
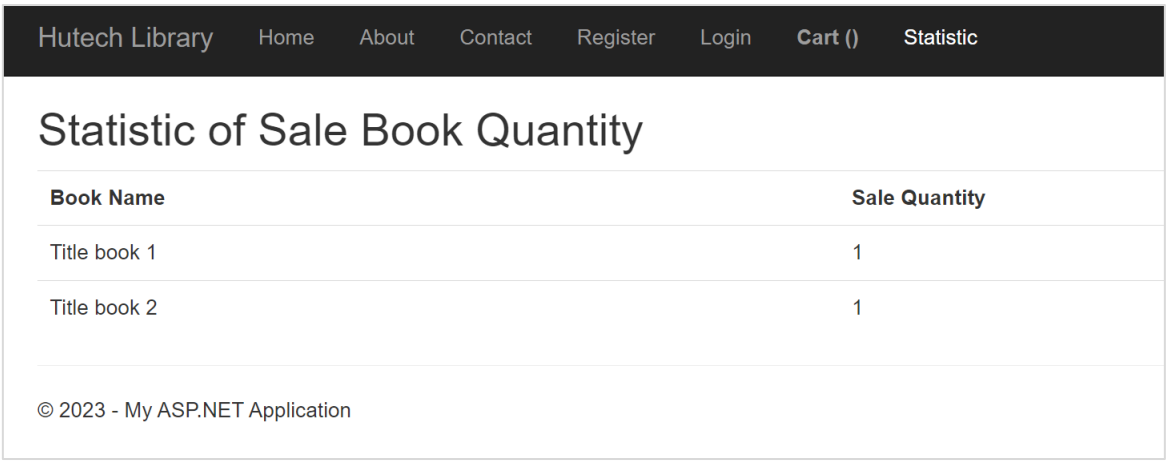
8. Create Statistic function