Radius SEO

User guide

Duppins Technology

Version 1.7.2

This guide walks every wp-admin screen. Red numbers on a screenshot match the numbered notes under that picture. The same pages are published at https://duppinstech.com/radius-seo/guide/ . Help, at the bottom-right of a Radius screen, opens the section for that screen.

The usual order is: install, save a license, import places, draw a service area, write one template, then deploy. Deploy updates the existing page for a place. It does not add a second copy.

Copyright Duppins Technology. This guide describes the product. It is not a warranty.

Install

Install Radius SEO from the release zip, then activate it. The zip must contain one folder, and that folder must contain `radius.php`.

Steps

1. In wp-admin open Plugins → Add New → Upload Plugin.

2. Choose `wp-radius-seo.zip` from the GitHub release. Install Now.

3. Activate Radius SEO.


4. The left menu gains a Radius item. Open Radius → Dashboard.

WordPress 6.0 or newer and PHP 7.4 or newer are required.

Until a license key is saved, Radius shows API key required and asks you to open License settings. Templates, landings, deploy, and imports stay locked. Go to License next.

Deactivate is not uninstall

On the Plugins row, Deactivate asks whether to keep Radius data or delete it. That choice is covered in Deactivate. Cancel, Close, Escape, or a click outside the dialog leaves the plugin active and deletes nothing.

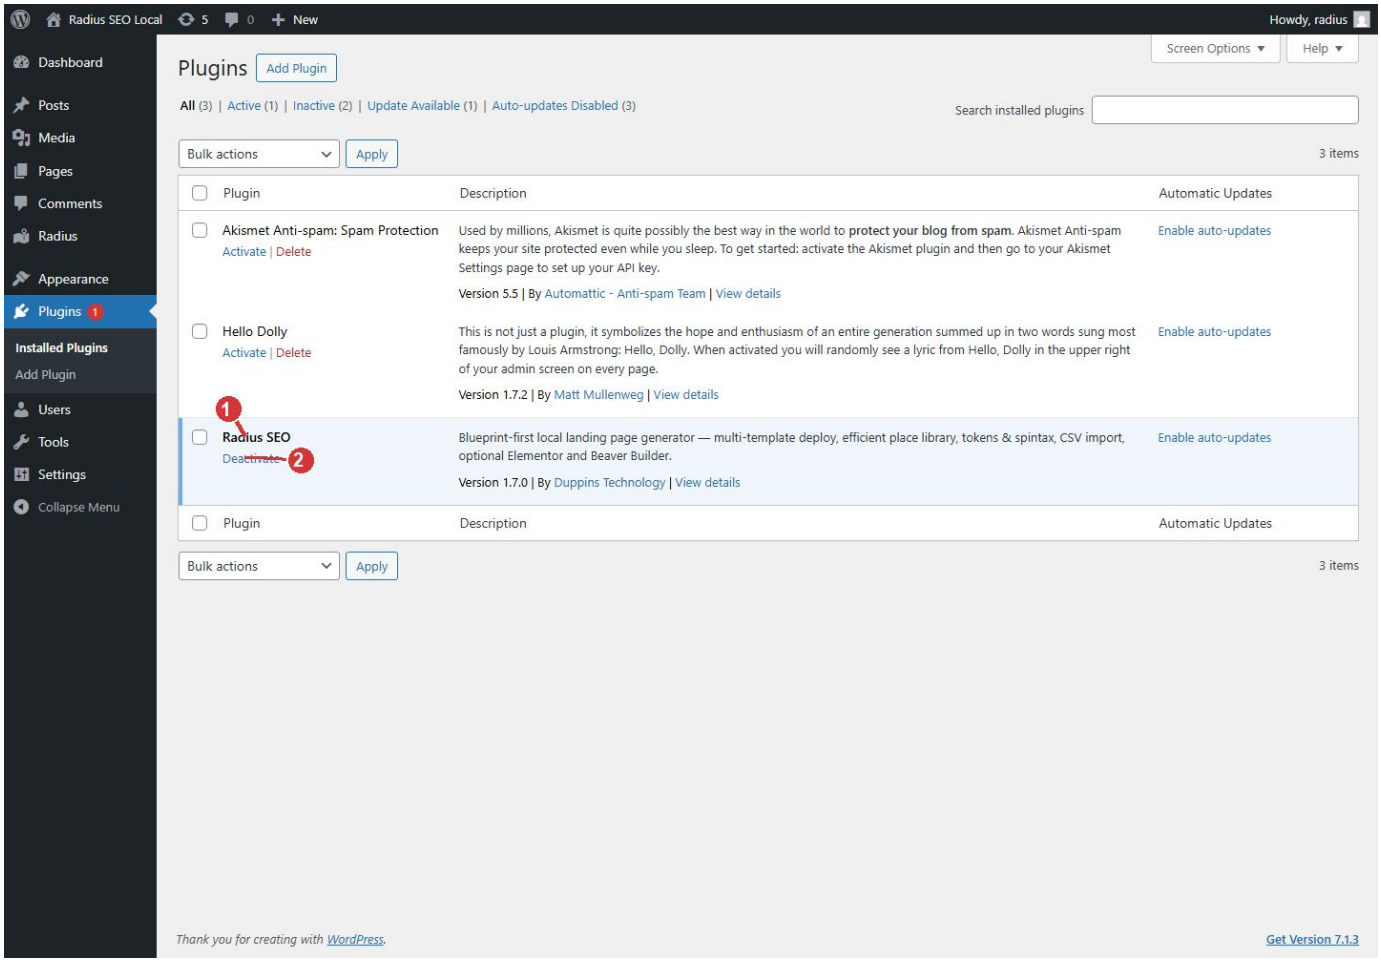

Plugins list, with Radius SEO and Deactivate marked

1. Radius SEO in the plugin list. This is the installed plugin.

2. Deactivate opens the keep-or-delete choice. Cancel leaves the plugin on.

Next

License.

License

Open Radius → Settings → License. Paste a signed key from Duppins Technology, then save it. Check only tells you whether the key is signed. It does not store it.

Steps

1. Open Radius → Settings. The License tab is the first tab. If no key is saved, other Radius screens send you here.

2. Click in API key. Paste the signed key. A new key starts with `RSL1.`

3. Click Check if you want to confirm the signature before saving. A failed check means the text is not a signed Radius key. It does not erase a key that is already saved.

4. Click Save Changes. The key is encrypted in the database.

5. Open Radius → Dashboard. The lock notice should be gone.

A key already saved on this site keeps working until you replace it or click Remove. There is no license server yet. The plugin cannot see a Stripe cancellation, and it does not refuse a single-site key on a second site. Say that honestly if a customer asks. Priority email for the unlimited plan is flagged in the Duppins Technology account. The plugin does not store or check that flag.

Purchase


The same screen has two purchase cards. Each opens Stripe in a new tab. After checkout, Duppins Technology sends the key. Paste that key here. The plugin does not receive the payment by itself.

- Single site is $9.99 per month. Purchase single site: https://buy.stripe.com/6oU7sK8Yt9hag4f0iJ00007

- Unlimited sites is $99 per month. Purchase unlimited sites: https://buy.stripe.com/4gM5kCeiN9ha8BN6H700008

Cancelling the Stripe subscription does not yet turn a saved key off.

Remove clears the saved key. After that, templates, the library, and deploy lock again until a key is saved.

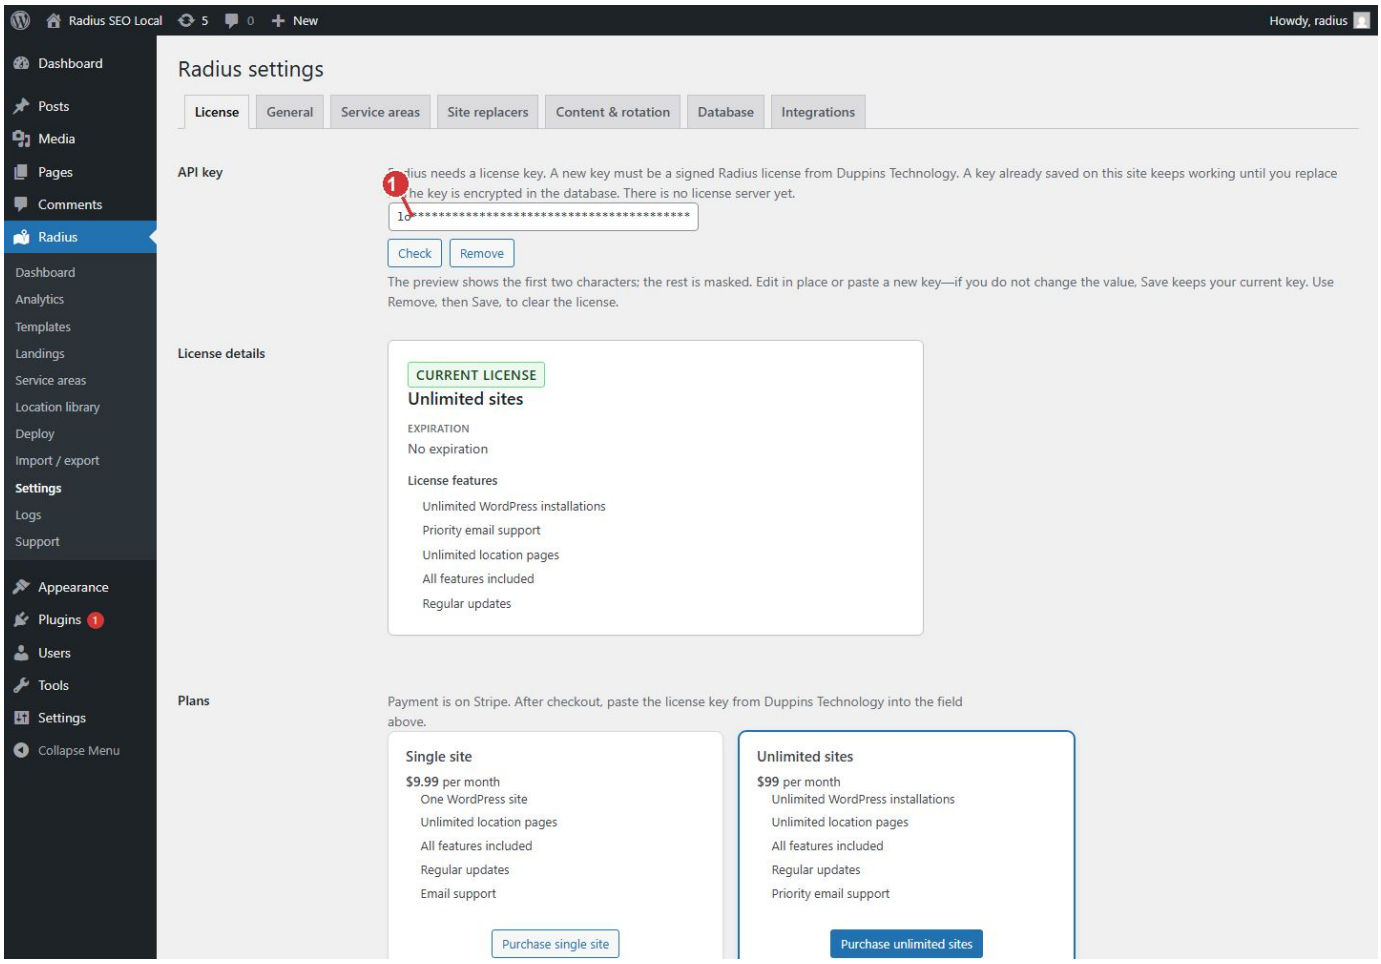

License tab, with the API key field marked

1. Paste the signed license here, then Save. Check does not store the key.

The purchase cards are on this same screen, under the key field.

Next

Location library, unless you still need to install.

Help button

Help is a round button at the bottom-right of every Radius screen. It is not a banner across the top.

Steps

1. On any Radius screen, click Help.


2. Read the short notes for the screen you are on.

3. Click Open the user guide. It opens this guide in a new tab, at the section for that screen.

4. Administrators also see Contact support. That opens Radius → Support. The Support screen itself does not show Contact support again, because you are already there.

5. Click Close, or press Escape. The panel closes and focus returns to Help.

The notes in the panel are a reminder. This guide is the full walkthrough.

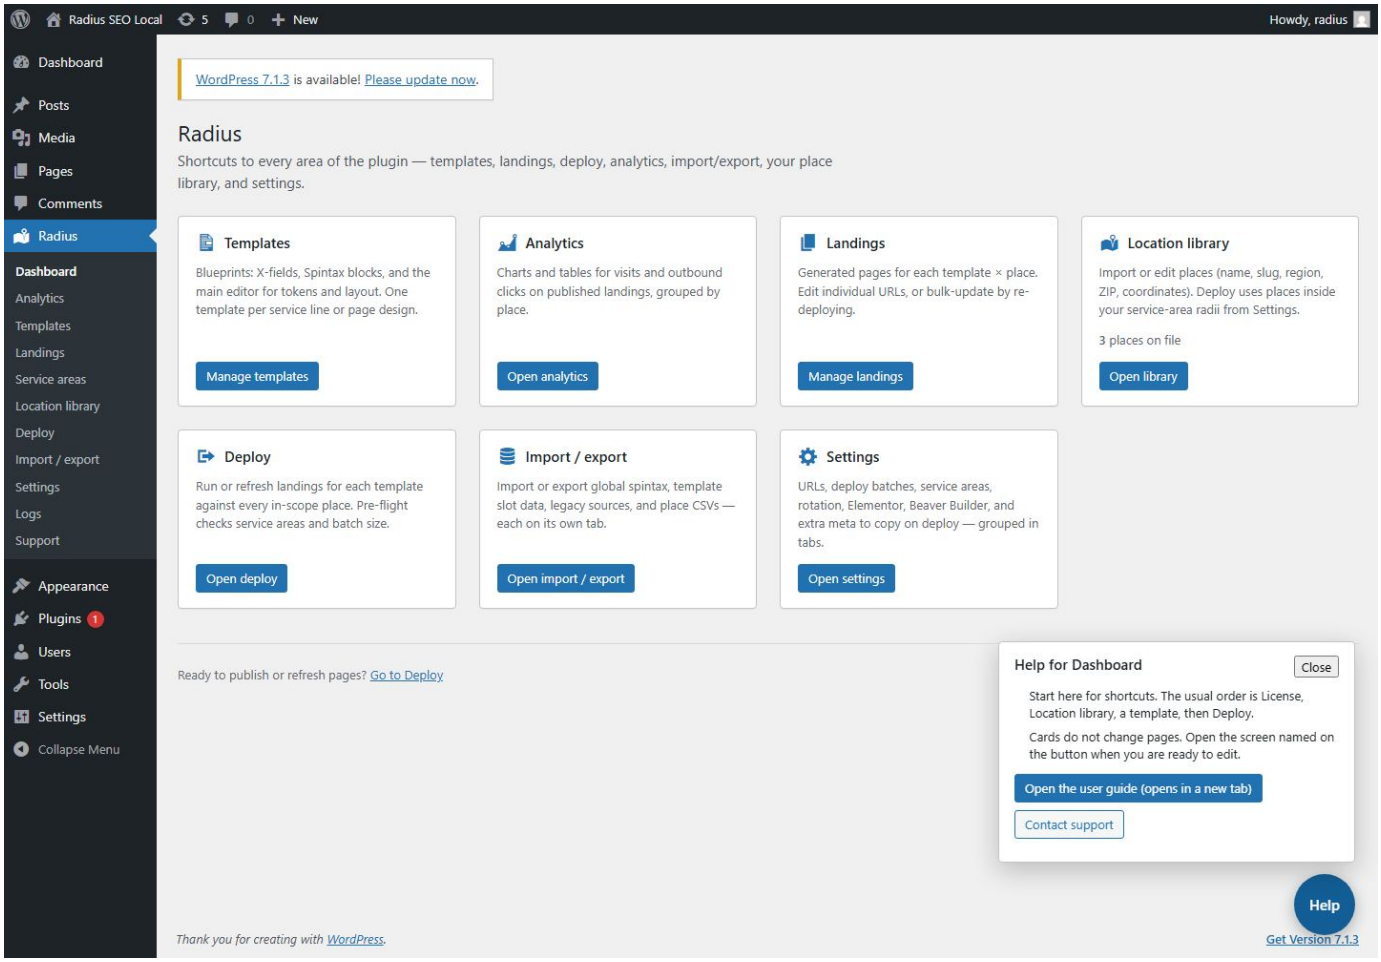

Help panel open on the Dashboard

1. Help sits at the bottom-right of every Radius screen. It is not a banner at the top.

2. Open the user guide goes to the guide on duppinstech.com, at the section for the current screen.

3. Contact support opens Radius → Support, for administrators.

Next

Use the table on Home if you arrived here without a section, or continue with Dashboard.

Dashboard

Radius → Dashboard is a set of shortcuts. The cards do not change pages by themselves. Use the button on a card to open that screen.

What you see

The left menu lists the same destinations: Dashboard, Analytics, Templates, Landings, Service areas, Location library, Deploy, Import / export, Settings, Logs, and Support.

The cards are:

- Templates. Blueprints. One template is usually one service line or page design. Button: Manage templates.

- Analytics. Visits and outbound clicks on published landings. Button: Open analytics. Administrators only.

- Landings. One generated page per template and place. Button: Manage landings.

- Location library. Places, with a count of places on file. Button: Open library.

- Deploy. Run or refresh pages for places inside your service areas. Button: Open deploy.

- Import / export. Spintax, template slots, legacy sources, and place CSVs, each on its own tab. Button: Open import / export.

- Settings. URLs, batches, service areas, rotation, and builders. Button: Open settings. Administrators only.

A line at the bottom says Ready to publish or refresh pages? and links to Deploy. Open Deploy only after a template, a library, and a service-area circle exist.

If the screen says API key required, stop and open License settings. Nothing else on the dashboard will run until a key is saved.

The usual path from here


1. Manage templates only after you know which service the page is for. If the library is empty, Open library first.

2. Open library and import places. See Location library.

3. Open settings, then the Service areas tab, and draw a circle. See Service area circles.

4. Manage templates and write the blueprint. See Template editor.

5. Open deploy. See Deploy.

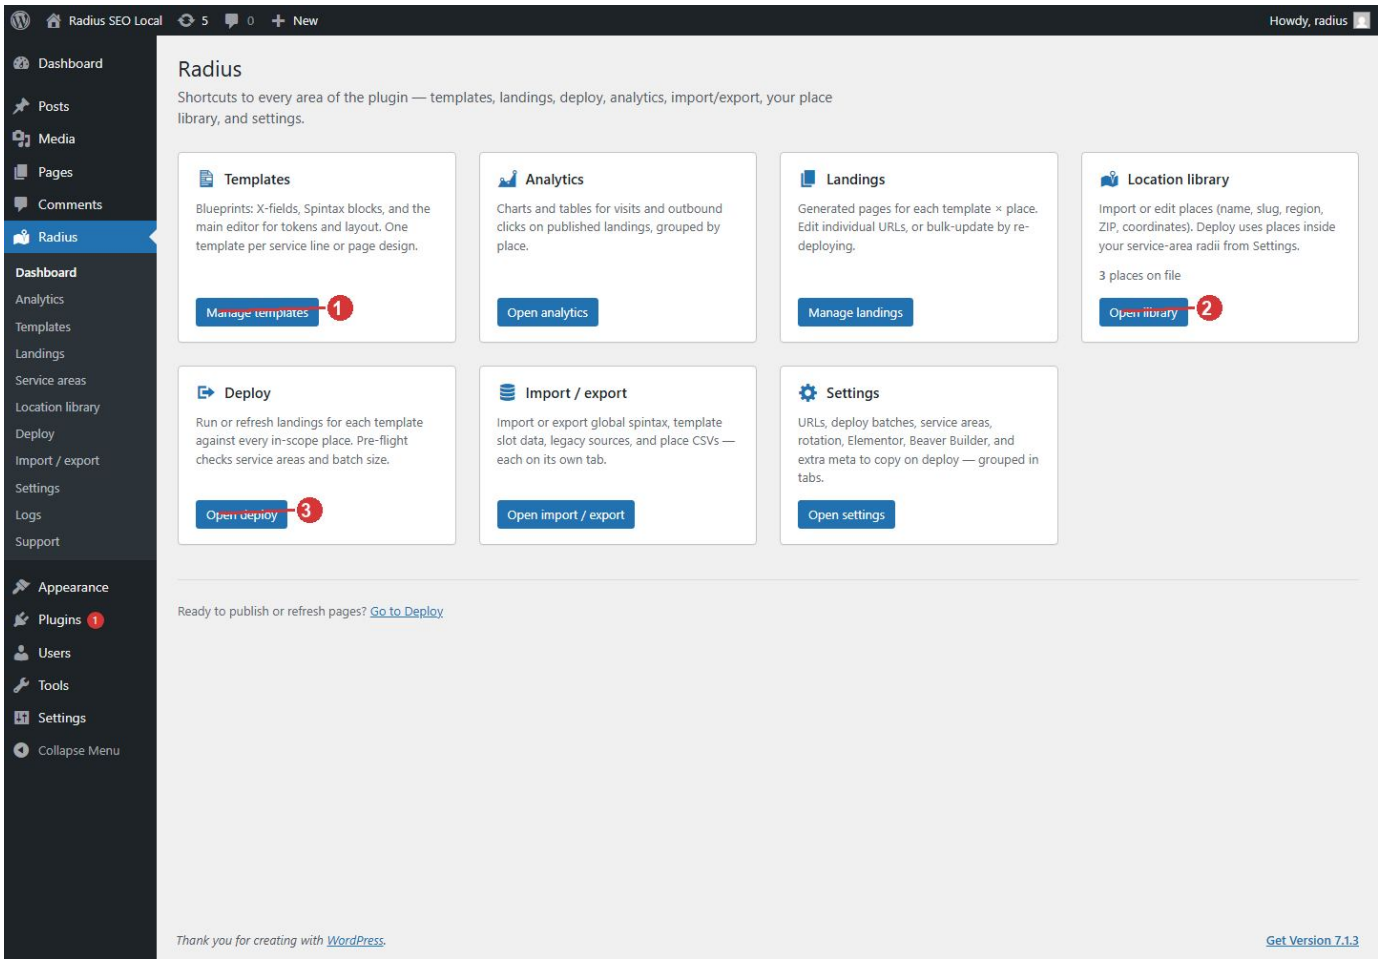

Dashboard shortcuts

1. Templates is where you write the blueprint.

2. Location library is where places are imported.

3. Deploy publishes a page for each place after the template is ready.

Next

Location library.

Analytics

Radius → Analytics counts visits and outbound clicks on published landings. The numbers stay on this site. They are not sent to Duppins Technology.

Steps

1. Deploy pages first. Analytics is empty until landings exist and someone visits them.


2. Open Radius → Analytics.

3. Read the chart for the shape of the counts. Read the tables when the chart is hard to see, or when you need a place-by-place number.

4. If the load fails, the screen says so in text. It does not leave you with a blank chart and no explanation.

Counts are grouped by place. An outbound click is a click that leaves the landing. The visitor IP is kept only as a short-lived rate-limit hash. The user agent is read so bots can be ignored.

Only an administrator sees this screen.

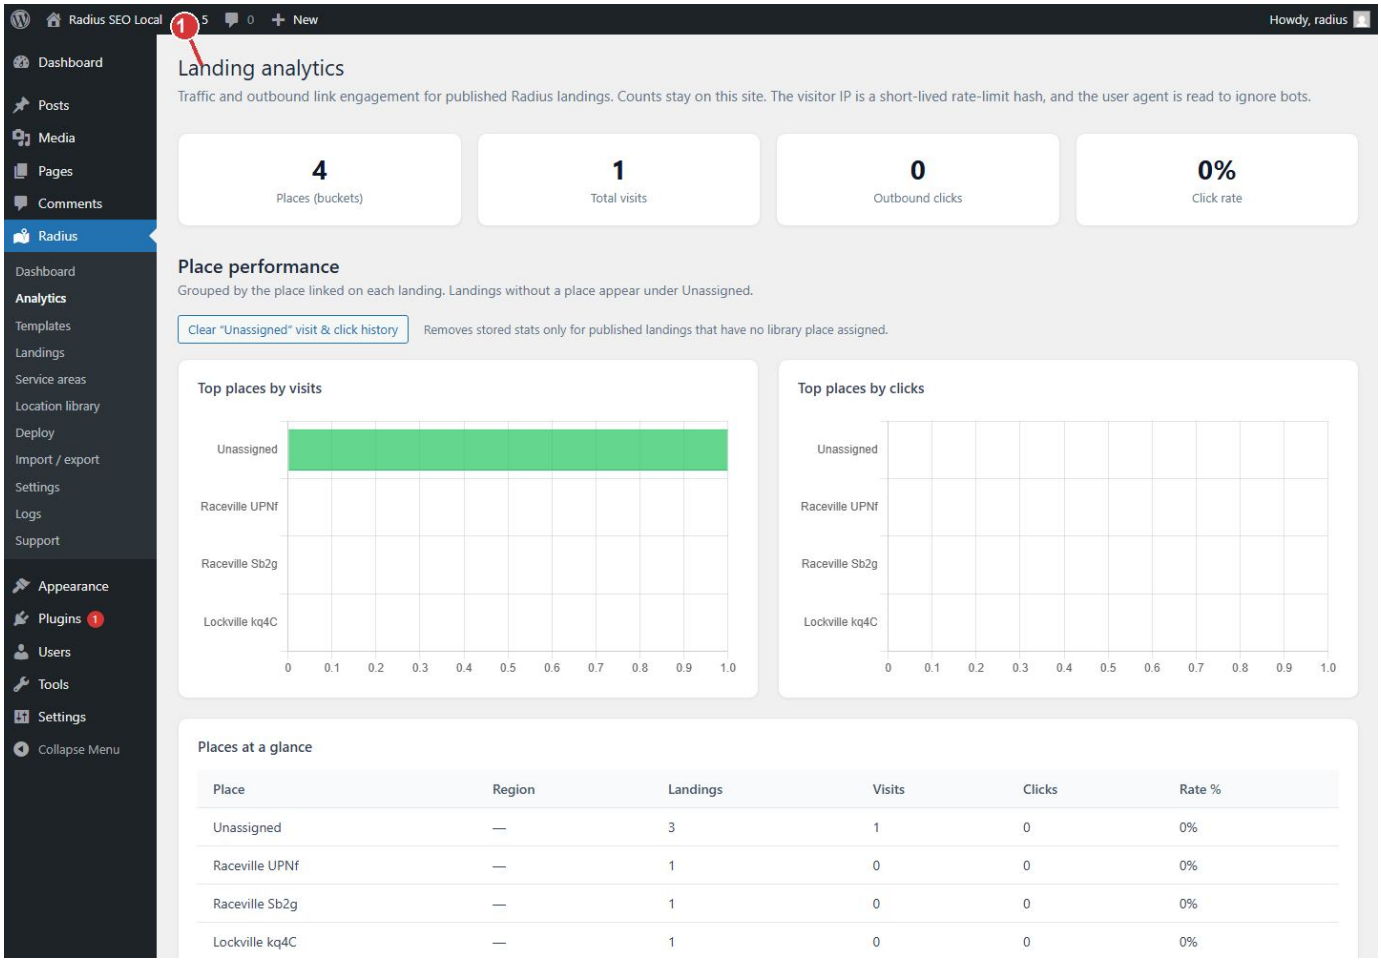

Analytics

1. Analytics counts visits and outbound clicks on published landings. The numbers stay on this site.

Next

If a page is missing from the tables, check Landings and Deploy. The page has to be published before a visit can be counted.

Templates

A template is the blueprint. Visitors never see this list. Deploy copies the blueprint once for each place inside your service-area circles.

One template is usually one service line or one page design. A towing page and a tire-repair page are two templates.

Steps

1. Open Radius → Templates.


2. Click Add New Template.

3. Name the template for yourself, for example Tire repair. That title is the name in wp-admin. The public title is set in the editor as the landing title pattern. See Template editor.

4. Write the body once, with tokens, and update the template.

5. When the wording is right, go to Deploy. Do not write a separate WordPress page for every city.

Each row is one blueprint. Open the row title to edit it. The row checkbox is for WordPress bulk actions on this list. It does not deploy.

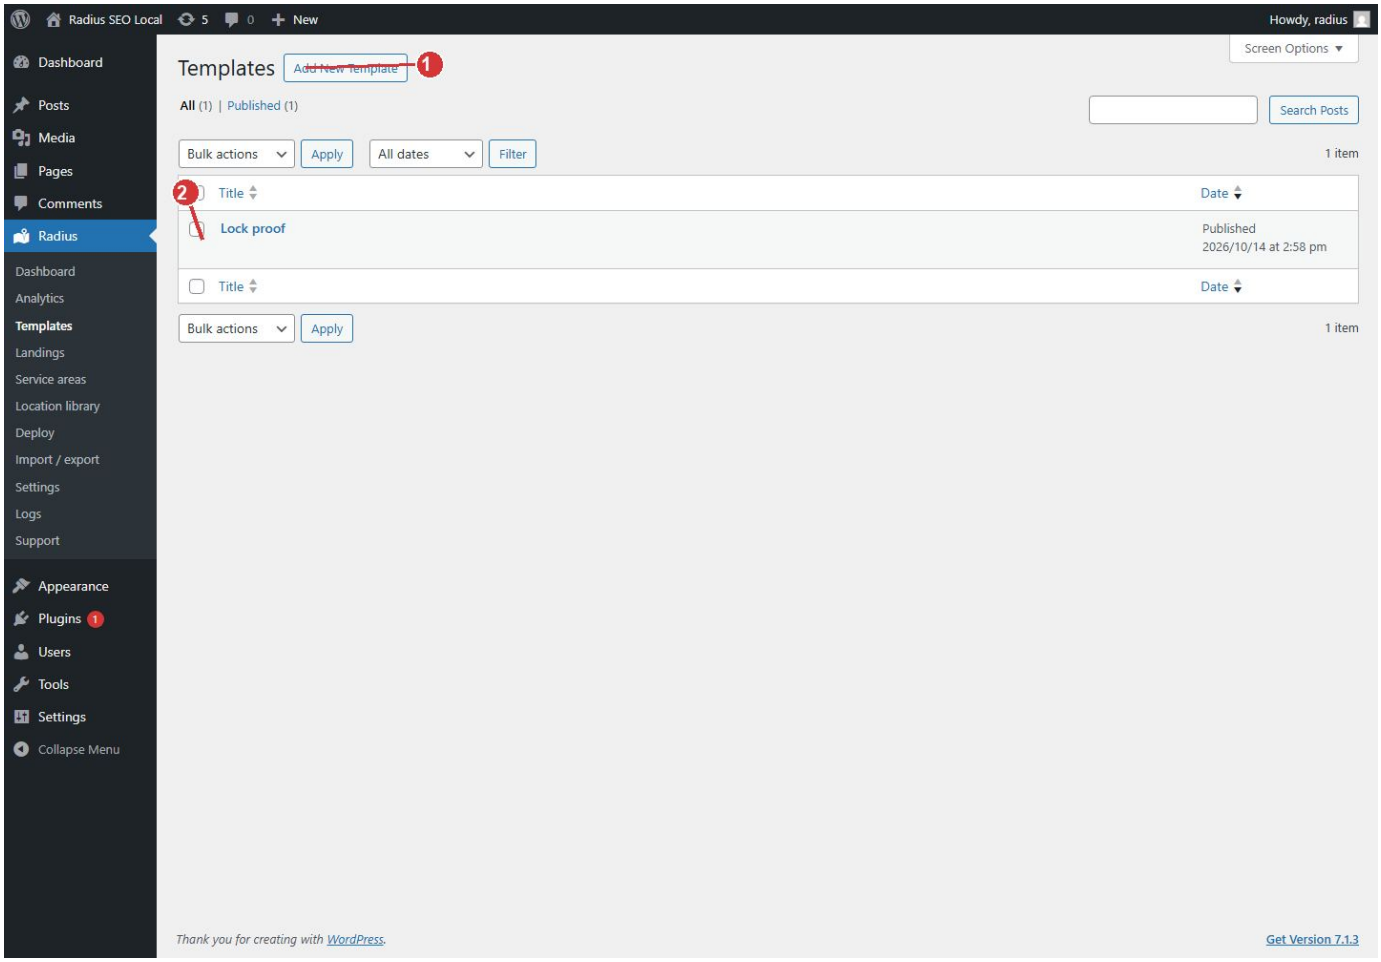

Templates list

1. Add New Template starts a blueprint. One template is usually one service.

2. Each row is a blueprint. Open it to put tokens in the title and body, then deploy it.

Next

Template editor.

Template editor

Open a template from Radius → Templates. This screen is the page visitors will see after tokens are filled in. Preview is only for people who can edit this template. Visitors do not see the blueprint.

If WordPress shows a welcome dialog over the editor, press Escape until the fields are visible.

Write the page once

1. Leave the template title as the private name (Tire repair).

2. In the body, write the page with tokens where the place and the company details should change.

3. In the sidebar, set the landing title pattern. Example: `Towing in {{place_name}}`. Deploy fills the place name. This pattern is the public title, not the template title.

4. Set the landing slug pattern if you need a specific URL shape. Landings are published at the site root, for example `/tire-repair-springfield/`.

5. Click Update.

Tokens you can put in the title, the body, and meta fields:

- `{{place_name}}` `{{place_slug}}` `{{country}}` `{{region}}` `{{state}}` `{{zip}}` `{{lat}}` `{{lng}}`

- Site replacers, such as `{{company-name}}` `{{company-short}}` `{{phone-number}}`. The values are set in Site replacers. `{{phone-number}}` may be a phone link. In a web address, Radius uses `{{phone-tel}}` so the link stays valid.

- Spintax: `{fast|quick|same-day}` stores one of those words on that page. It does not rotate on every visit unless you later turn on scheduled rotation.


Spintax blocks in the sidebar are optional extra variation for a heading or a paragraph. Each block has a label and choices. You do not have to use them on the first template.

Builders

If this template was built in Elementor or Beaver Builder, turn that builder on under Integrations, save, then return here and edit with that builder. Deploy copies the builder layout onto each landing only when that switch is on. A normal block template does not need either switch.

What deploy will do with this template

Deploy writes one current landing per place in range. Edit this template later, deploy again, and those landings update in place. A hand edit on one landing is replaced the next time that template and place are deployed. See Edit one landing.

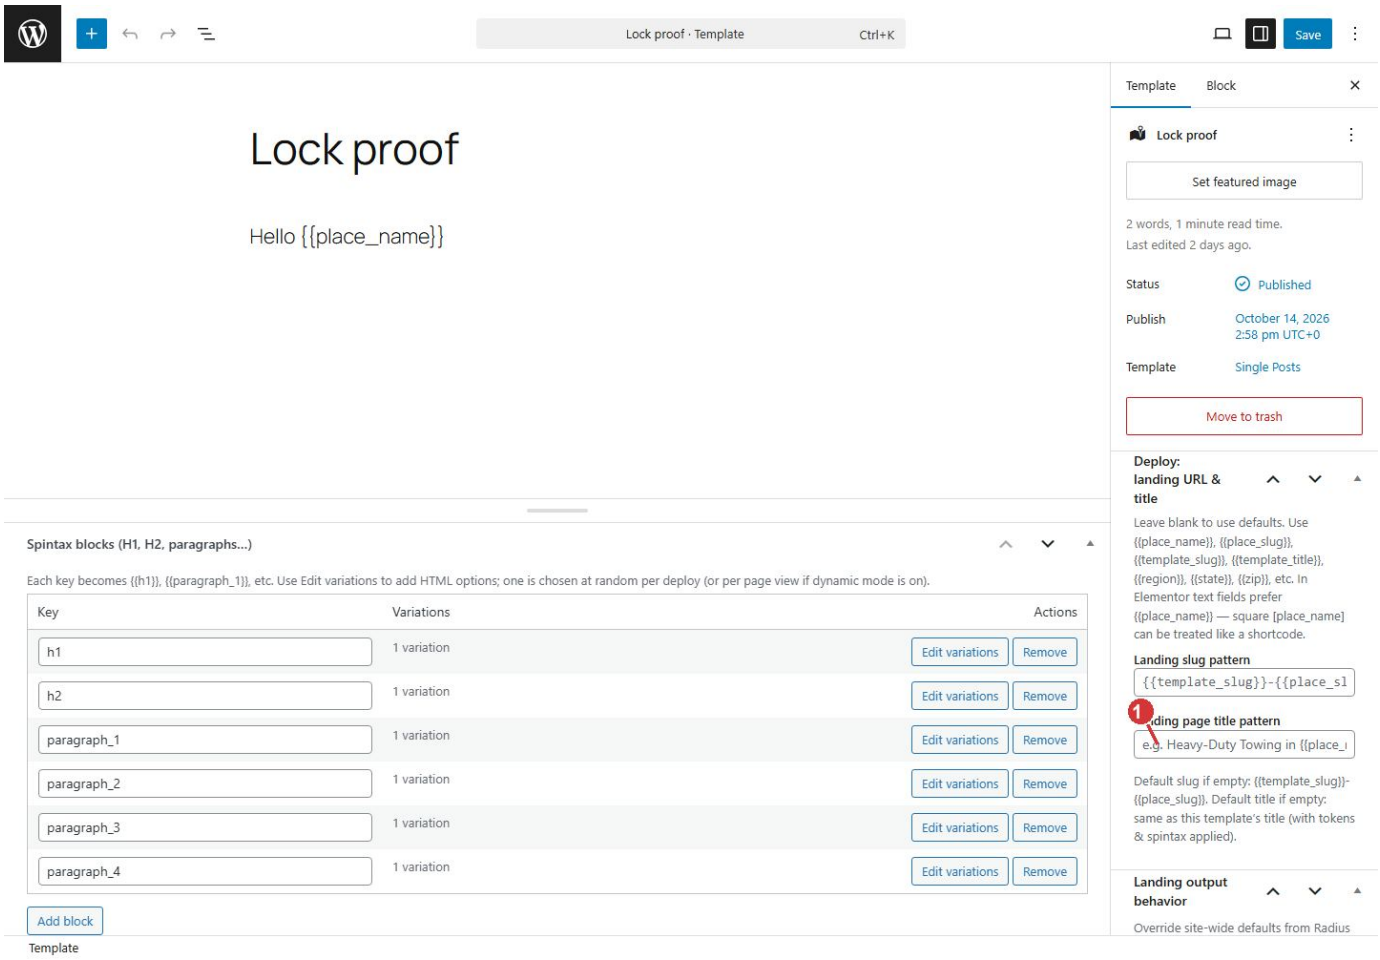

Template editor, landing title pattern marked

1. Landing title pattern. Example: Towing in {{place_name}}. Deploy fills the place name.

The body above that sidebar is where `{{place_name}}` and the other tokens go.

Next

If places and a service-area circle are saved, go to Deploy. If the company name and phone are still empty, set Site replacers first.

Landings

Radius → Landings lists the city pages. Each row is one deployed page for one template and one place. These URLs sit at the site root. They do not use the service-area prefix. Example: `/tire-repair-springfield/`.

Hub pages are a different list. See Service area hubs.

Steps


1. Open Radius → Landings after a deploy.

2. Find the place. Open the row to view or edit that page, or click View to see the public URL.

3. To refresh the wording for many cities, do not edit every row. Edit the template, then deploy that template again. Deploy updates the existing page. It does not add a second copy of the same place.

4. A filter or search on this list only changes which rows you see. It does not publish or delete pages.

If a place you imported is missing here, it was outside the service-area circle, it had no latitude and longitude, or its slug was skipped as a low-value match (for example a subdivision). Check Service area circles and Location library, then deploy again.

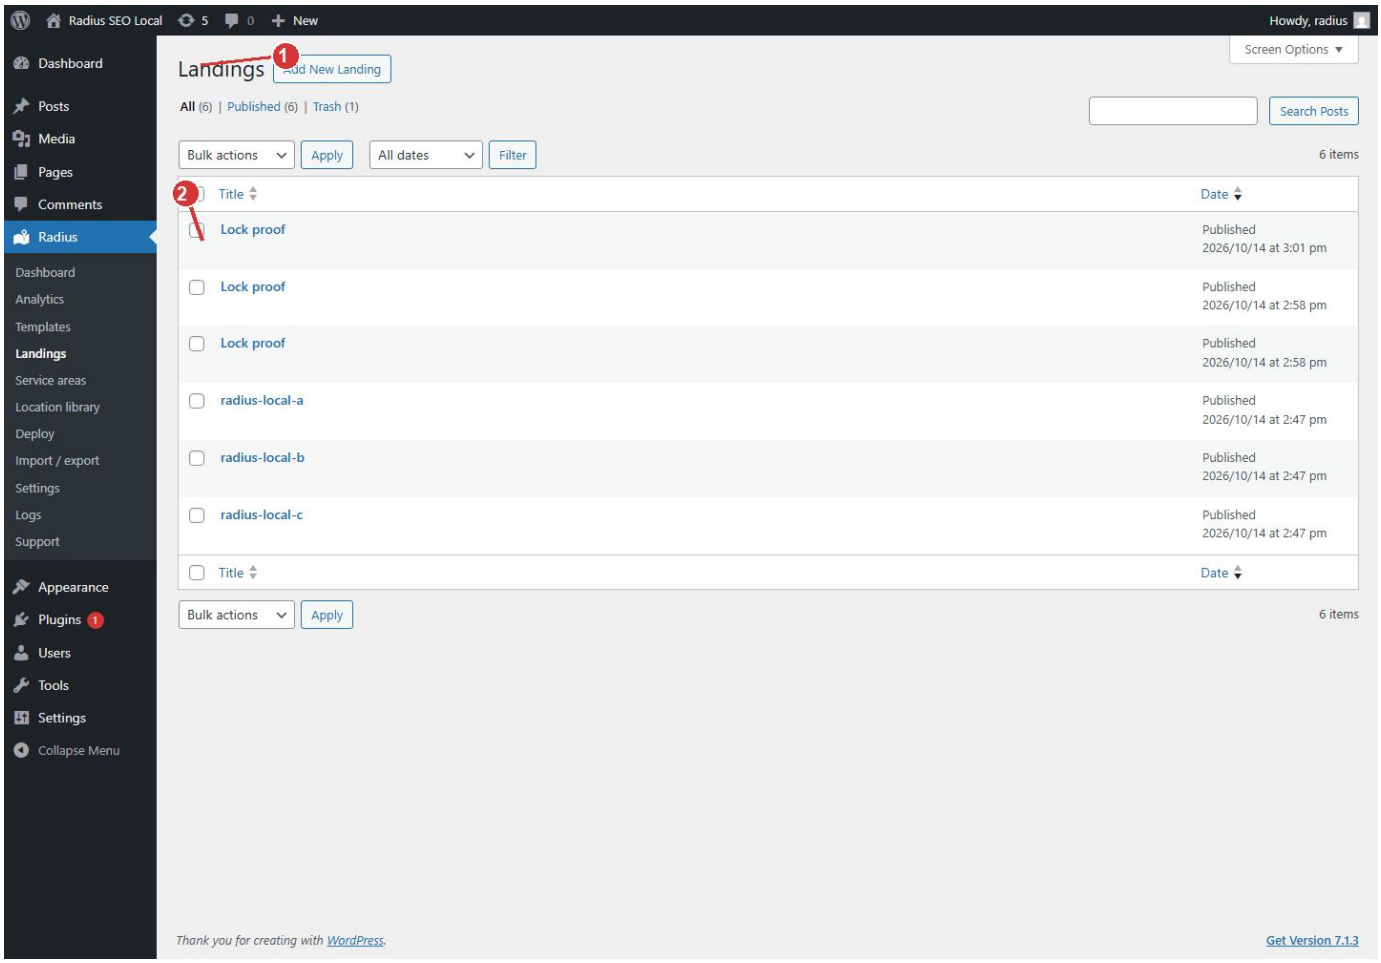

Landings list

1. Each landing is one deployed page for one template and one place.

2. Deploy again to update these pages. It does not add a second copy of the same place.

Next

Edit one landing if one page needs a temporary change. Deploy if the whole set should match the template.

Edit one landing

Open a row under Radius → Landings. This is one published page. The template and the place stored on it are how Radius finds this page on the next deploy.

Steps

1. Change the copy only if this city must differ from the template for now.

2. Update the page.

3. Leave the template and place fields filled in. If you clear them, the next deploy cannot match this page and may create another one.

4. Expect the next deploy of this template and place to rewrite the page from the template. Your one-off edit does not survive that deploy.

To change every city, edit the template instead. See Template editor.

Next

Landings to return to the list, or Deploy when you are ready for the template to overwrite this page.

Service area hubs

Radius → Service areas lists hub pages, not the city landings. A hub URL uses the prefix from Settings → General, then the place slug. Example: `/service-area/springfield/`. City landings stay at the site root.

The circles that decide which places are in range are not drawn on this list. Those circles are Settings → Service areas. See Service area circles.


Steps

1. Choose a service-area template under Settings → General. Deploy uses that template for hubs and shows it as read-only on the Deploy screen.

2. Open Radius → Deploy, then the Service areas section, and run the hub deploy.

3. Return here. Each row is one hub for one place.

4. To change the wording of every hub, edit that service-area template and deploy the hubs again. The same place keeps one hub.

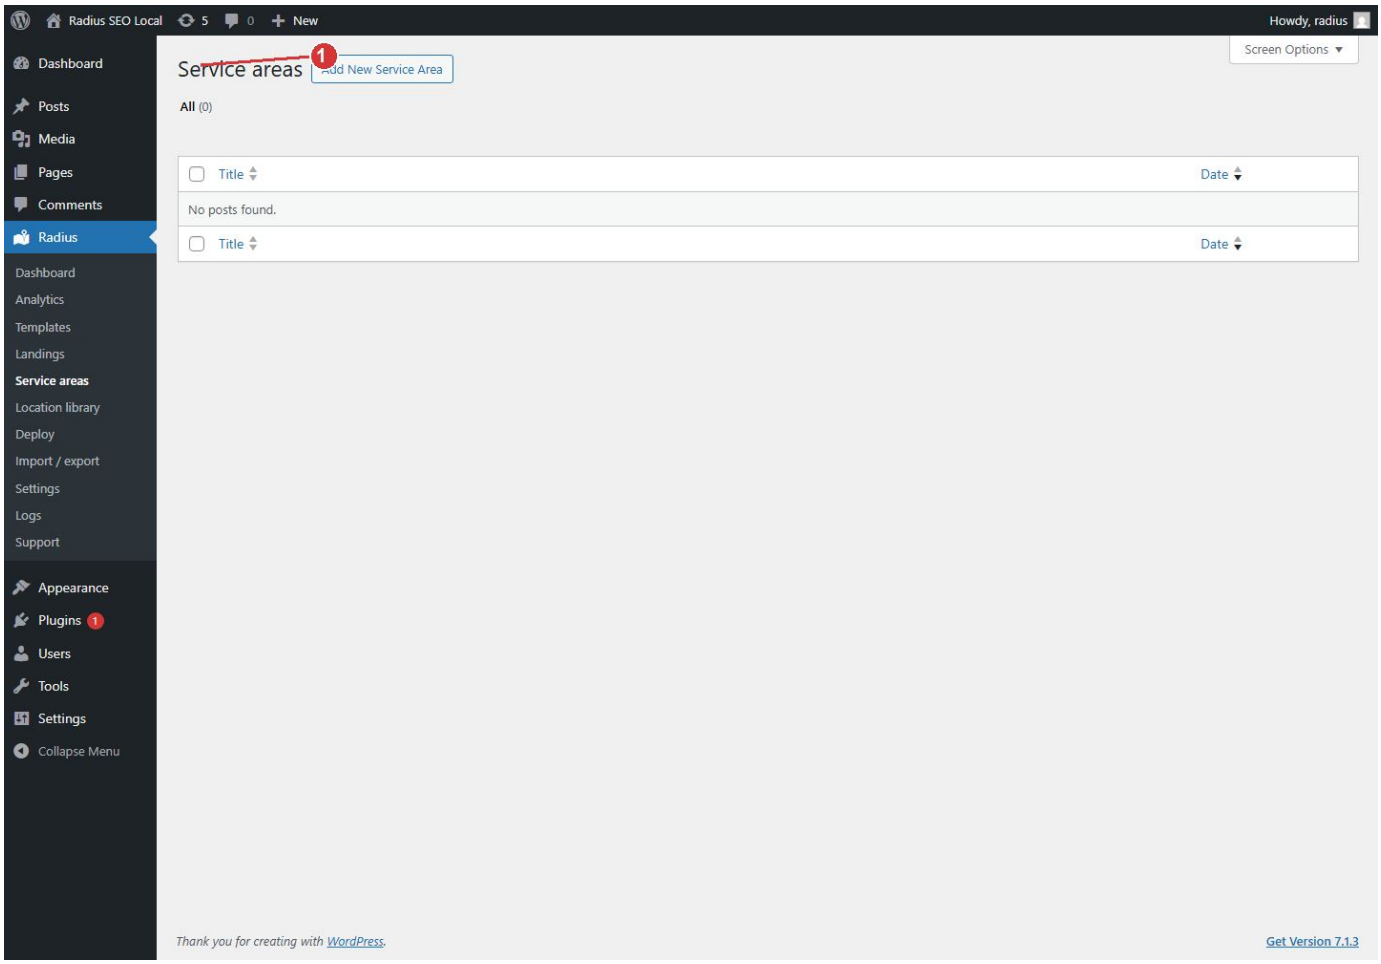

Service area hub list

1. Service areas are hub pages. Their URLs use the prefix from Settings, General.

Next

Edit one hub, or Service area circles if no hubs were created because no circle is saved.

Edit one hub

Open a row under Radius → Service areas. This page is one hub for one place.

Steps

1. Edit the hub only for a temporary, one-place change.

2. Update.

3. Leave the template and place stored on the page so the next service-area deploy updates this hub instead of creating another.

4. The next service-area deploy rewrites this hub from the service-area template.

Next

Service area hubs.

Location library

Radius → Location library is where places live. Radius does not download a city list. You bring the places in a CSV, or you add one place at a time.

A place needs a name. Deploy skips a place that has no latitude and longitude.

Where the data comes from

Prepare a spreadsheet of the cities you serve. Export it as CSV with a header row. Download CSV on this screen writes a file in the column order Radius expects, which is the easiest template to fill in:

`id, name, slug, country, region, state, zip, lat, lng`

`name` is required. `lat` and `lng` are required if that place should receive a page. The other columns are optional. `id` is used only when you are updating a place that is already in the library.

A valid first file:

```
name,slug,region,state,zip,lat,lng
Springfield,springfield,Virginia,VA,22150,38.7893,-77.1872
```

Coordinates are decimal degrees. Springfield in this example is a sample row, not a place Radius ships for you.

Upload

1. Open Radius → Location library. Only an administrator can upload.

2. Under Import CSV, choose the file.

3. Leave Update existing places off the first time. Rows that match an id or slug you already imported are skipped.

4. Turn Update existing places on only when you mean to overwrite the name and map fields of a match.

5. Click Upload CSV.

6. The table lists the places. Click Edit on a row to change coordinates, region, ZIP, and the other fields for that place.

Download CSV exports the whole library in that same column order. To export some rows, select them, choose Export selected as CSV, and click Apply.

Cleanup on this screen


- Remove duplicates keeps the shortest slug when the same display name exists more than once.

- Orphan numbered slugs repairs a slug that ends in -1 through -9 when the base slug is missing. If the base slug already exists, use Remove duplicates for the extra numbered rows.

- Slug pattern matches finds substrings such as trailer, subdivision, or village. Deploy skips those places too. Removing a place here also moves its deployed landing and service-area hub to the Trash.

Empty library (batched) deletes every place. Landings may then point at missing places. Review the list before you use it. This cannot be undone from this screen.

Bulk action Delete selected (cannot undo) deletes only the rows you checked.

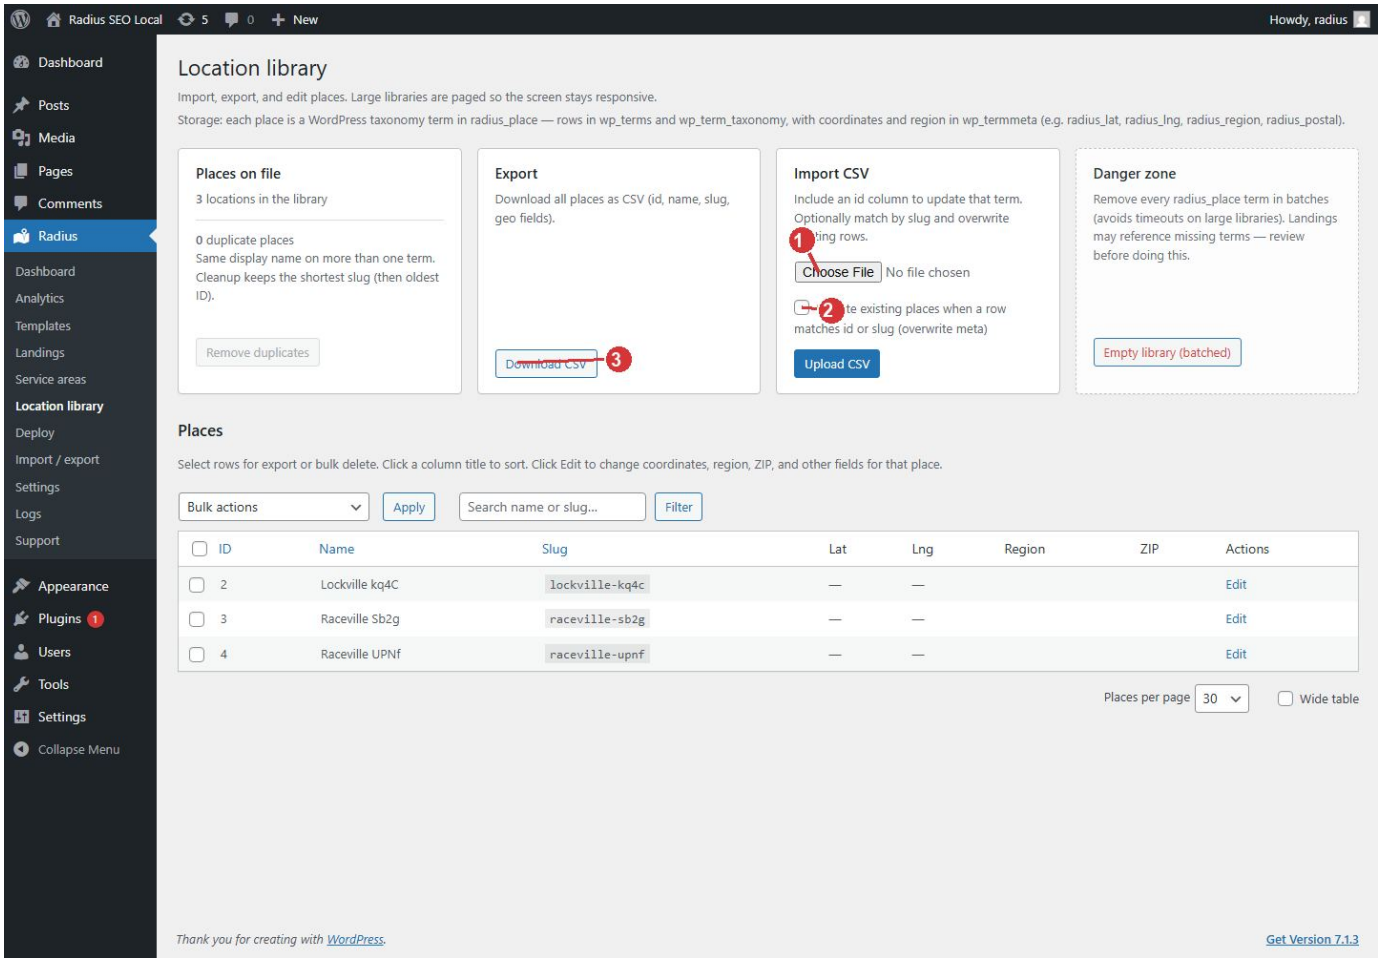

Location library import

1. Upload a CSV with columns name, lat, and lng. A name column is required.

2. Leave this off to skip places you already imported. Turn it on to overwrite matches.

3. Download CSV shows the column order: id, name, slug, country, region, state, zip, lat, lng.

Next

Service area circles. A library by itself does not publish pages.

Service area circles

Open Radius → Settings → Service areas. Each row is a center place from the location library plus a radius in miles. Deploy includes library places that fall inside those circles. Places with no coordinates are skipped.

This tab is not the hub-page list. Hub pages are Radius → Service areas. See Service area hubs.

Steps

1. Import places first. The anchor search only finds places that are already in the library.

2. Search for the anchor place. That place is the center of the circle.


3. Enter the radius in miles.

4. Click Add service area row if you serve another region, and repeat.

5. Click Save Changes.

Saving assigns an area code such as `sa-…`. Site replacers can then store a different phone number, or any other token, for places inside that circle. The closest matching circle wins when two circles overlap. Save the circles before you expect those codes to appear on the replacers screen.

Deploy stays disabled until at least one circle is saved.

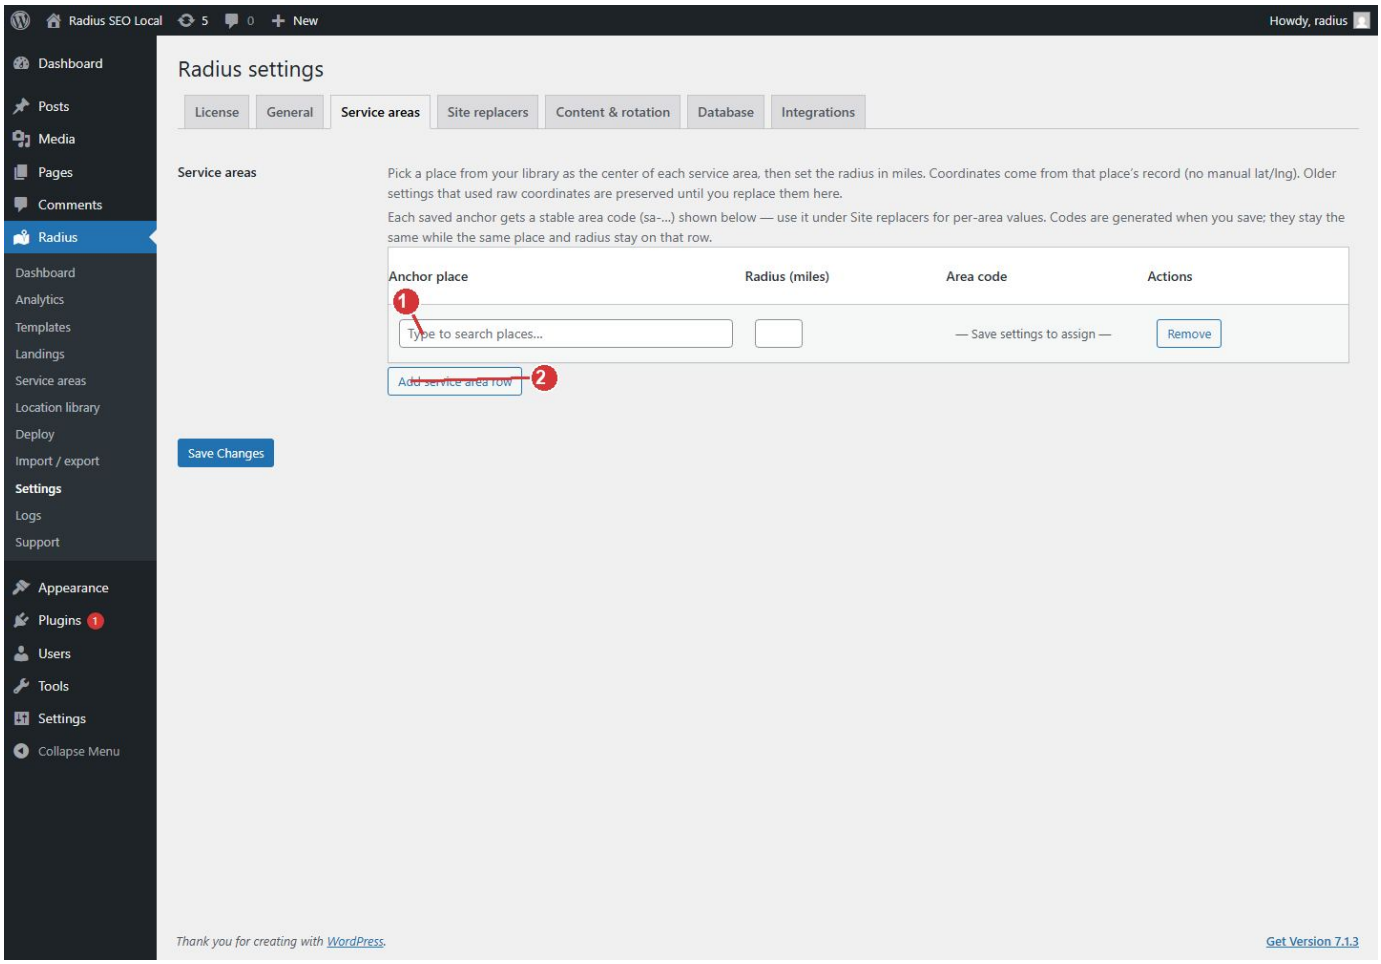

Service area settings

1. Anchor place is the center of the circle. Pick it from the location library.

2. Add another circle when you serve more than one region. Save to assign area codes.

The miles field is on the same row as the anchor place. The numbered mark is the Add service area row control.

Next

Site replacers if the company name and phone are still empty, then Deploy.

Deploy

Radius → Deploy publishes or refreshes pages from a finished template. It writes one current landing for each library place inside your service-area circles. Run it again after you edit the template. The same place keeps one page.

Deploy will not run until Settings → Service areas has at least one circle. If the button is grey, that is the reason. Open the service-area settings and add a center place plus a radius in miles. See Service area circles.

Before you click deploy

1. The template body and the landing title pattern contain the tokens you want. See Template editor.

2. Site replacers have the company name and phone. See Site replacers.

3. Places have latitude and longitude.

4. At least one service-area circle is saved.

5. For hubs, Settings → General has a service-area template selected. City landings use the template card on this screen, not that dropdown.

Pre-flight on this screen shows how many places are in the library, how many service areas exist, and how many places are in range. Read it before you start. A library of three places and zero service areas means nothing will be published.

Run it

1. Open Radius → Deploy.

2. Find the template card.

3. Click Deploy & update all places.

4. Leave the window open. Large libraries run as a chain of requests. Each request stays within the deploy batch size from Settings → General.

5. If a batch stops and JavaScript did not continue, click Continue deployment. Each click runs one batch.

6. If the screen reports a server error, open Logs. The processing log is the run. The error log is the failure.

Edit template on the card returns you to the blueprint if the wording is wrong. Fix the template, then deploy again.


Hubs are the Service areas section on this same screen. That section uses the template chosen in Settings → General and publishes under your service-area URL prefix.

Before the first batch, Radius drops places whose slug contains a low-value substring (the same list as Location library → slug cleanup) and collapses duplicate display names so only the shortest slug per name is deployed.

Health check


Health check reports duplicates and pages that lost their link to a template or a place. It does not publish new pages by itself. Fix all issues is for those reported links. Read the result text before you run it. Reconnect deployed pages, when it is offered, is how a page is pointed back at its template and place.

How deployment works on this screen opens a short explanation. It is the same behavior this article describes.

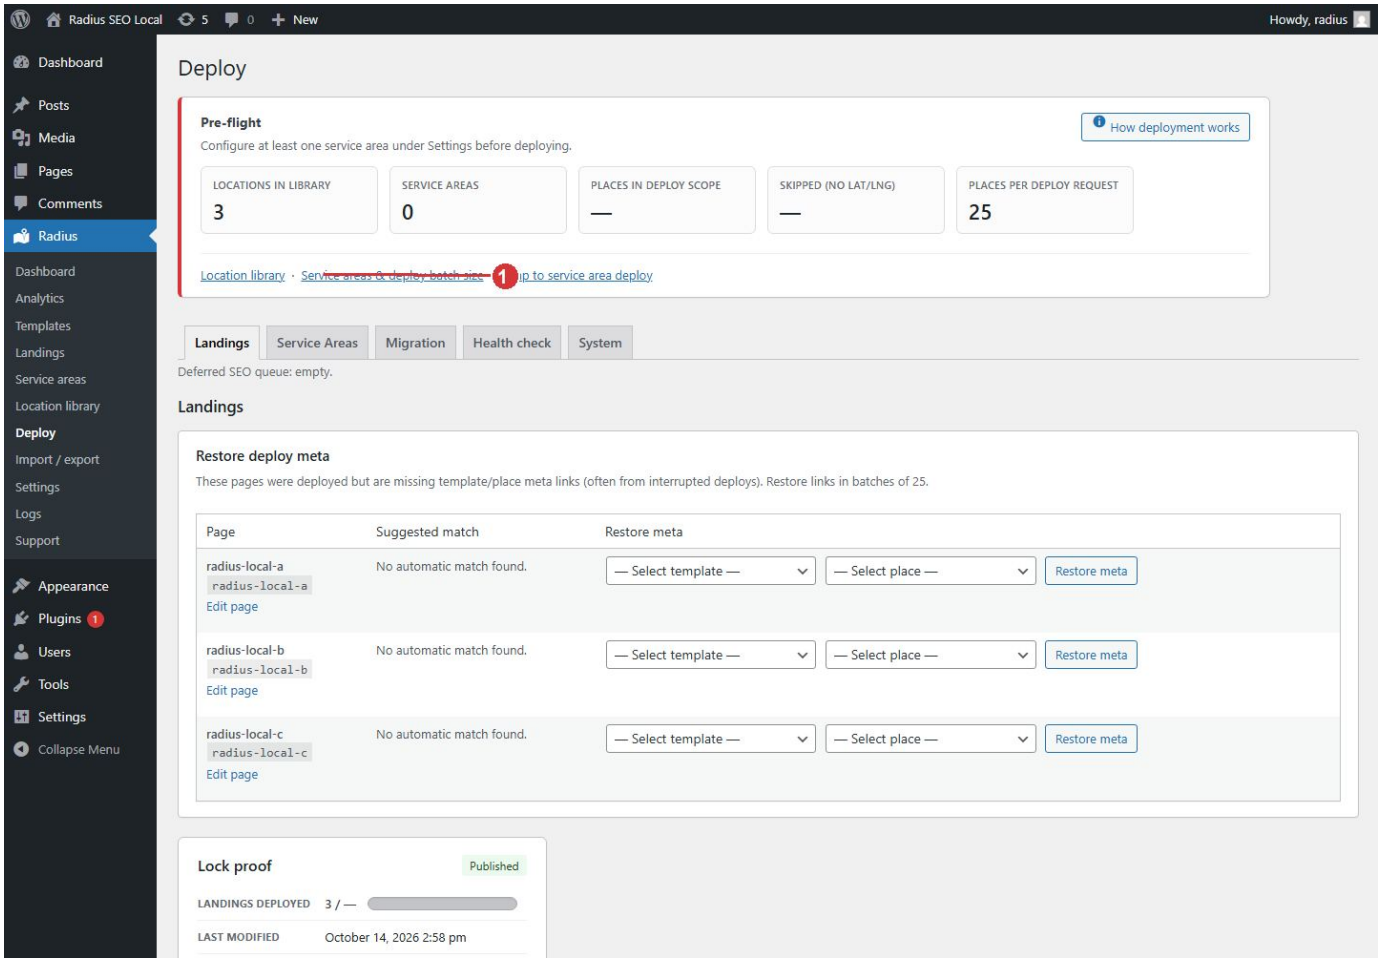

Deploy pre-flight when no service area exists

1. Open Settings, Service areas, and add a center place plus a radius in miles.

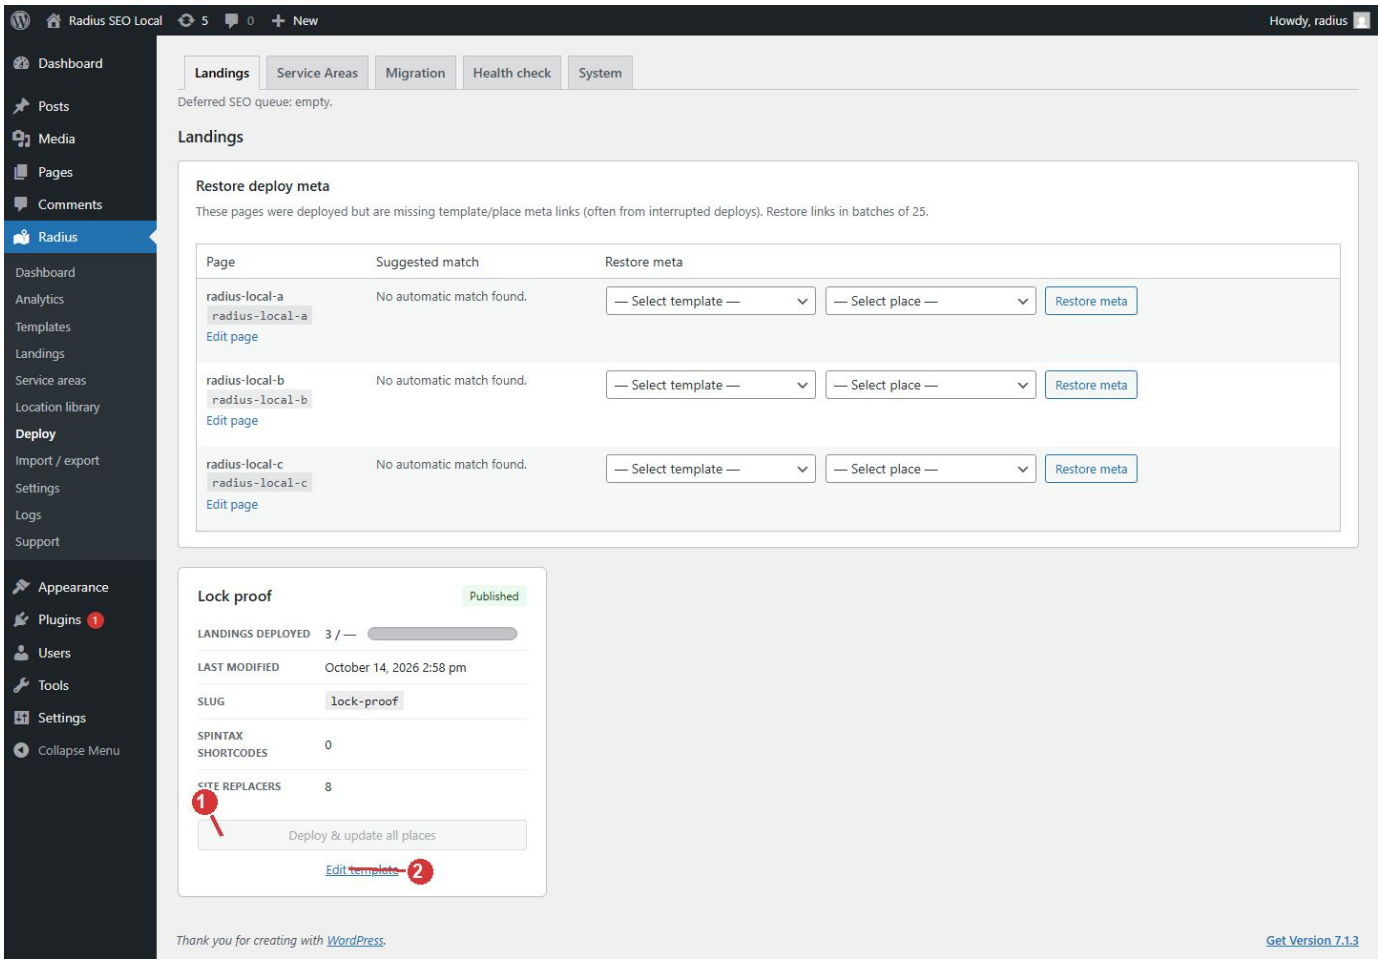

Deploy button on a template card

1. After the template is ready, Deploy and update all places writes one current landing per place in range. The button stays off while pre-flight says there is no service area.

2. Edit template returns to the blueprint if the pages need different wording.

Next

Landings for the city pages. Service area hubs for the hubs.

Import / export

Radius → Import / export moves pieces in bulk. Day-to-day place import is on Location library. Use this screen when you are filling spintax, template slots, or moving an older Magic Page library.

Tabs

- Spintax (global option). Upload variation rows that templates can share. If a template is already open in the editor, reload it so the Spintax blocks list picks up the new rows.

- Templates & slots. Fill slot groups on one template. You need permission to edit that template.

- Locations. The same place CSV as the location library. Prefer the library screen when you are only adding cities.

- Magic Page migration. Use this only when this WordPress database still has Magic Page data. Leave it alone on a new site.

Magic Page migration, only if you are moving an old library

The guided flow copies locations, imports blueprint templates (including Elementor documents), and publishes one Radius template per Magic Page service group. Then you finish spintax and deploy on the other tabs.


1. Read the server readiness score. Migration stays blocked below 60 percent unless you acknowledge the risk and bypass the check.

2. Run the legacy place import in batches. Batch size, skip-existing, and the pause between batches are under Settings → General.

3. Import the blueprint templates and open each draft to confirm the layout.

4. Finish on the Spintax tab, then Deploy.

Pulling places from a remote Magic Page server is not supported. Use a database on this site, or export places and upload the CSV.

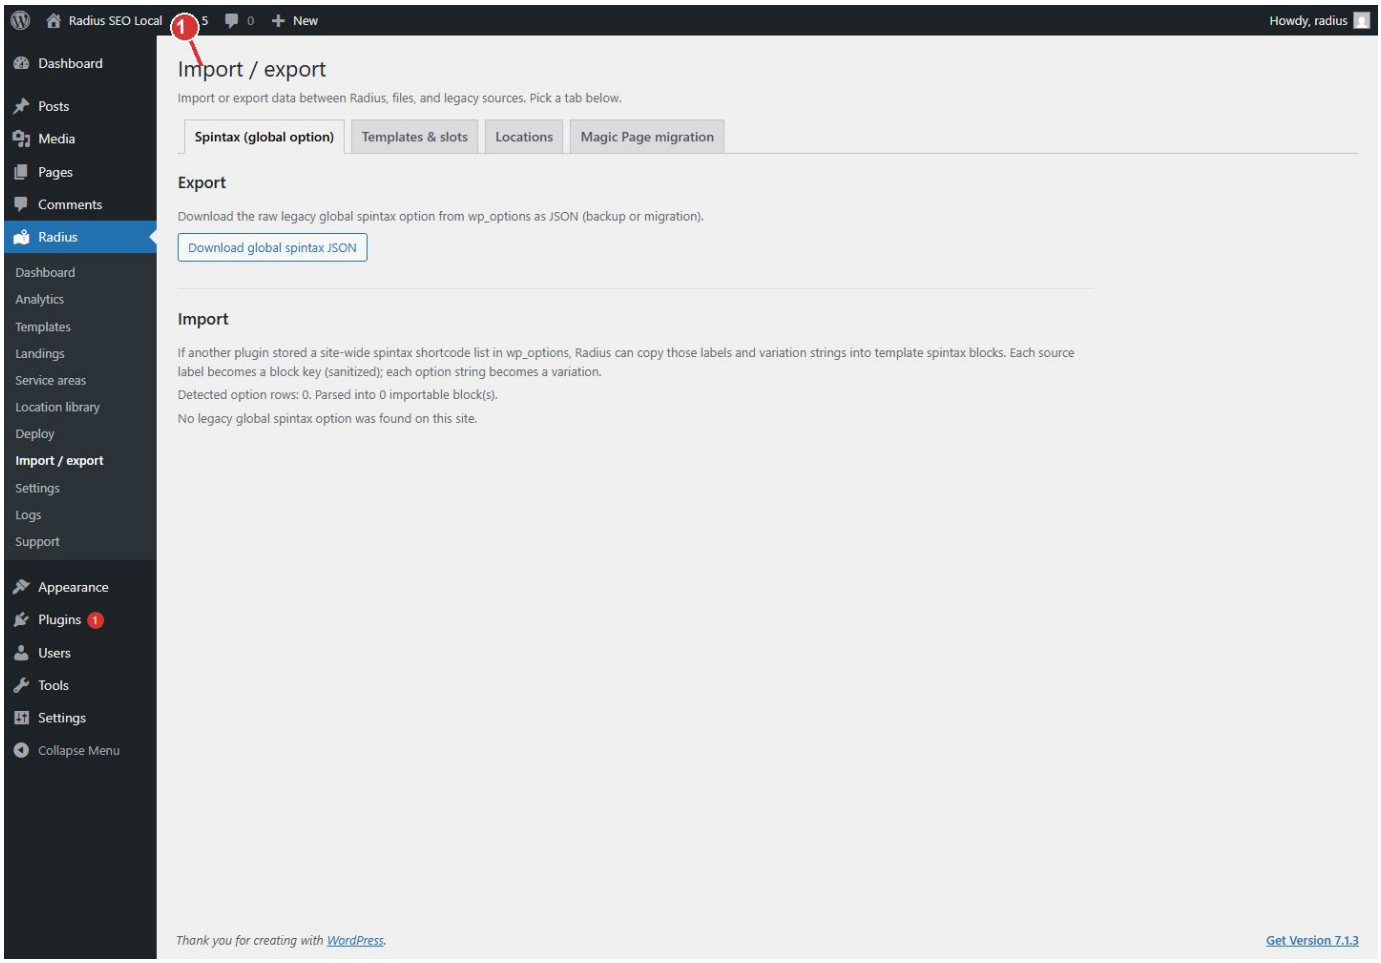

Import / export tabs

1. Import / export holds spintax, template slots, place CSV, and the Magic Page migration. Use migration only when moving an older library.

Next

Deploy after the template and the library look right. Logs if a batch reports a server error.

General settings

Open Radius → Settings → General. This tab holds the hub URL prefix, the template Deploy uses for hubs, and the batch sizes. Click Save Changes before you leave the tab.


Fields

- Service area URL prefix. One segment of letters, numbers, and hyphens. Hub pages use the site address, this prefix, and the place slug. Example: `/service-area/springfield/`. Landings do not use this prefix. They stay at the site root.

- Service area template (default). The blueprint for hubs. Deploy's Service areas section uses this choice and shows it as read-only. City landings use the template card on the Deploy screen, not this dropdown. Choose None only if you are not publishing hubs.

- Deploy batch size. The maximum number of places in one deploy request. The browser chains those requests until the run finishes. Lower it (about 15 to 40) when a host times out. Without JavaScript, each Deploy or Continue deployment click runs one request. The maximum is 200.

- Legacy place import batch, Skip library matches, Delta import, and Pause between AJAX batches. These apply only to a Magic Page place import. On a new site, leave them. Smaller batches and a longer pause reduce timeouts and firewall throttling. The pause is in milliseconds, from 0 to 30000.

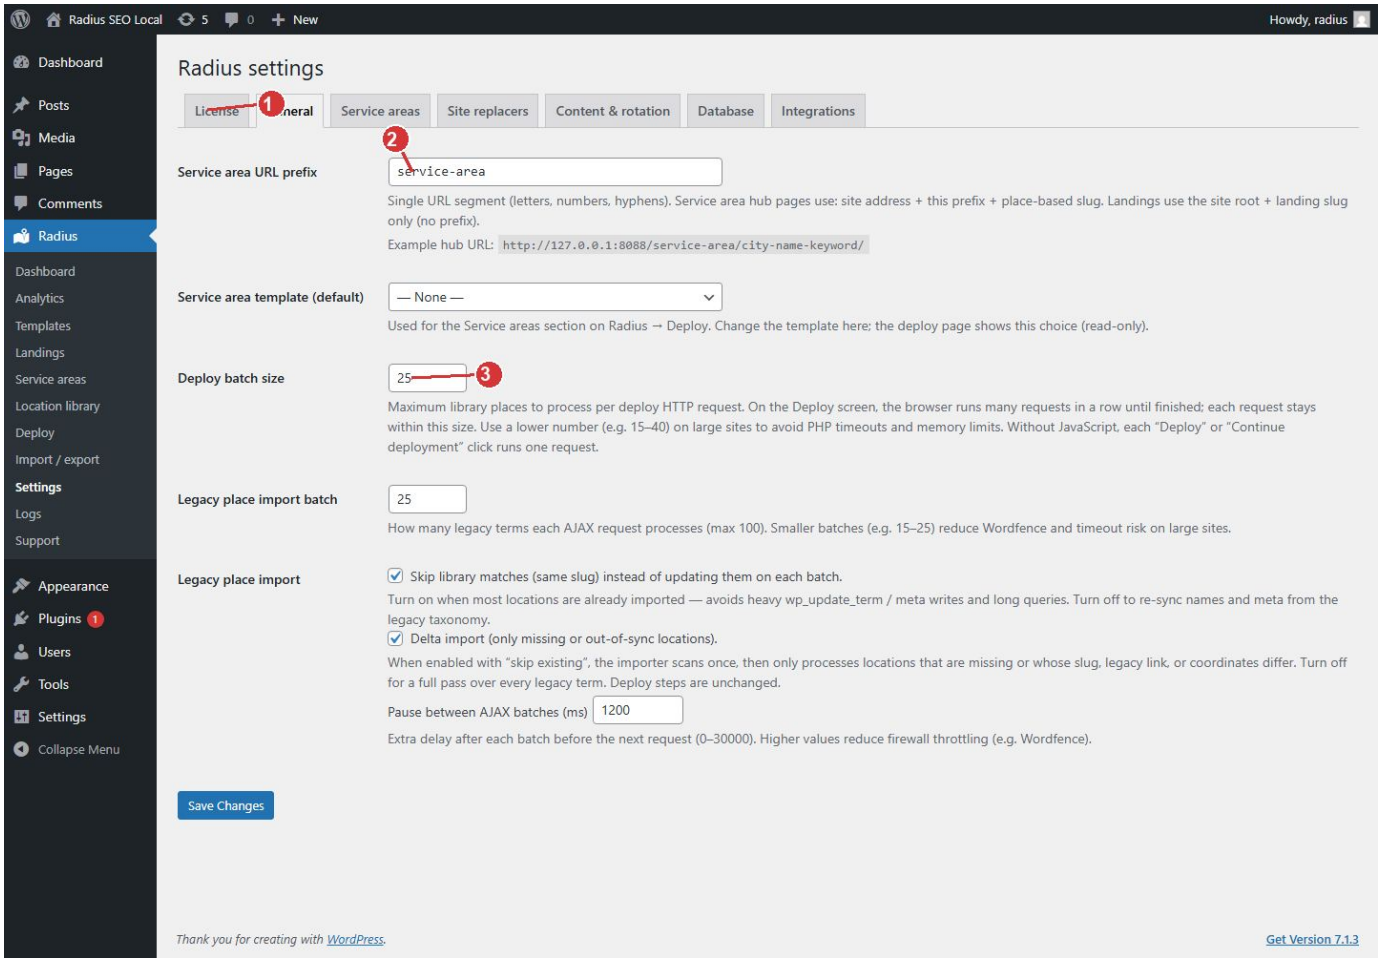

General settings

1. Each settings job has its own tab. License, General, Service areas, Site replacers, Content and rotation, Database, Integrations.

2. This prefix is only for hub URLs. Landings stay at the site root.

3. Lower the deploy batch size when a host times out.

Next

Service area circles if you have not drawn one. Site replacers for the company name and phone.

Site replacers

Open Radius → Settings → Site replacers. A replacer is a token such as `{{company-name}}` or `{{phone-number}}`. The value is written onto every deployed page.

Save Service areas first so area codes appear when you want a different value inside one circle.

Steps

1. Find the row. The usual keys are `company-name`, `company-short`, `roadside-keyword`, `towing-keyword`, `heavy-keyword`, `equipment-keyword`, `phone-number`, and `phone-tel`.

2. Click Edit values.

3. Enter the default. This is the value used when no area override matches.

4. For a circle that needs a different phone, add an override keyed by that area code (`sa-…`). The closest matching circle wins when radii overlap.


5. Click Save Changes.

6. Deploy again. Existing pages keep the old text until the next deploy.

`phone-number` is the text in the page, and it may be a clickable phone link. `phone-tel` is the dialable number Radius puts in the link address. Use both when the visible number and the `tel:` value should match.

Add replacer creates a new token. The key should be lowercase. Use it in a template as `{{your-key}}`. Remove deletes that token. Pages already deployed still show the old value until you deploy again.

An empty stored list clears the suggested rows. If you remove rows by mistake, add the keys back before you deploy.

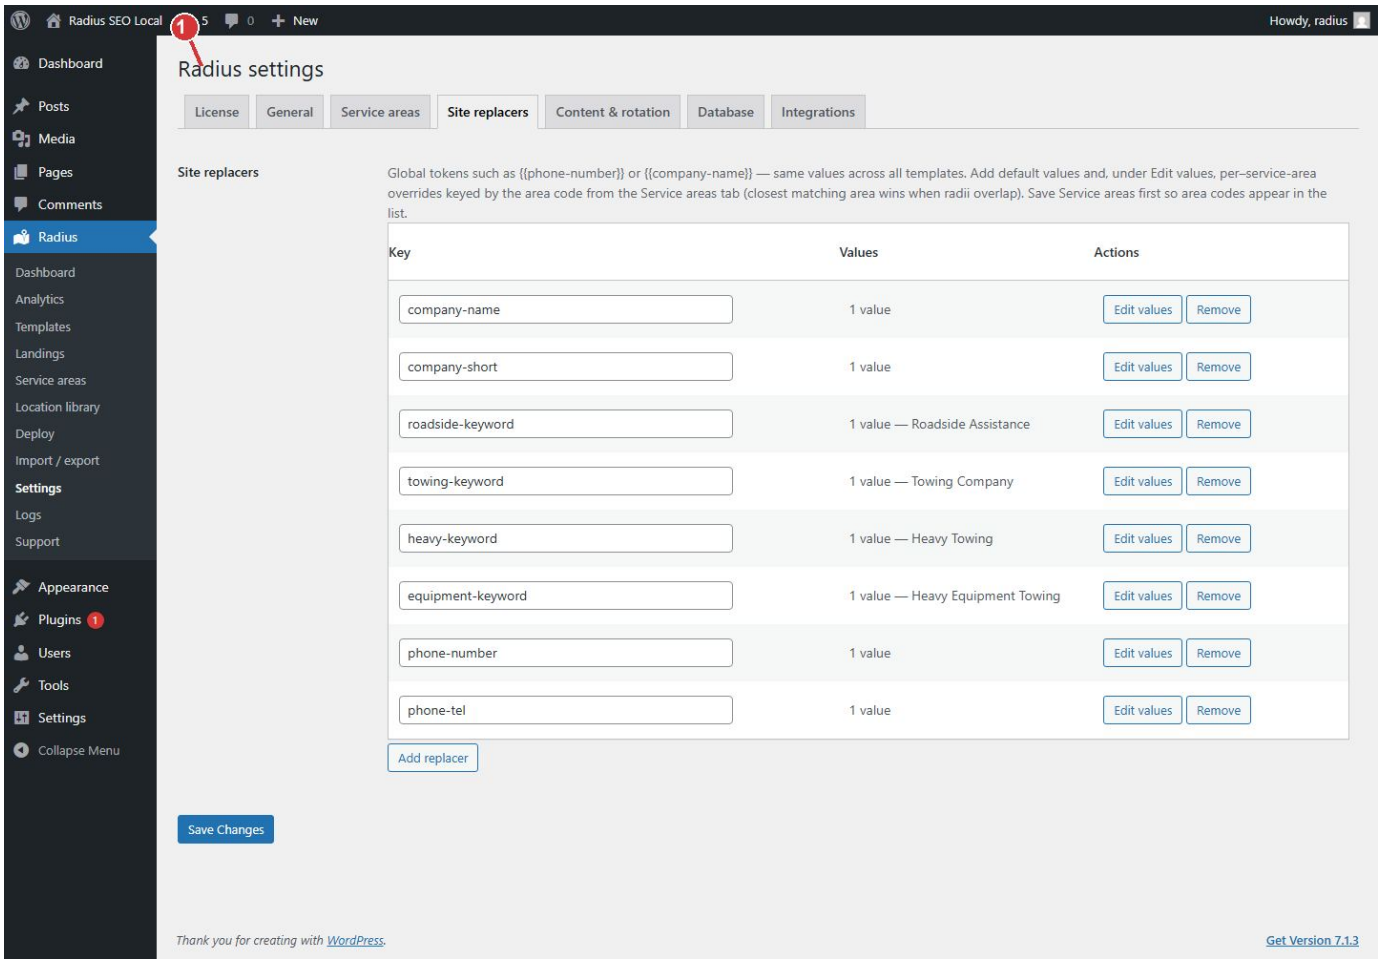

Site replacers

1. A replacer fills a token such as {{company-name}} or {{phone-number}} on every deployed page.

Next

Deploy.

Content and rotation

Open Radius → Settings → Content & rotation. Leave scheduled rotation off unless you want spintax rewritten on a timer.


What the switches do

- Resolve tokens on every page view applies to classic landings that are not built in Elementor or Beaver Builder. When it is off, visitors see the HTML stored on each landing. That HTML is updated by deploy and, if you turn it on, by scheduled rotation. A template can override this in the template editor under Landing output behavior.

- Scheduled content rotation uses WP-Cron. Each tick updates one batch. The next batch runs about two minutes later until every page has been updated, then the cycle waits for the interval you set. Between runs, visitors see the stored page. Leave this off for a normal site. Deploy already writes the spintax choice onto the page.

- Health email goes to the override address only when you enter one. Otherwise it uses the WordPress admin email.

Click Save Changes.

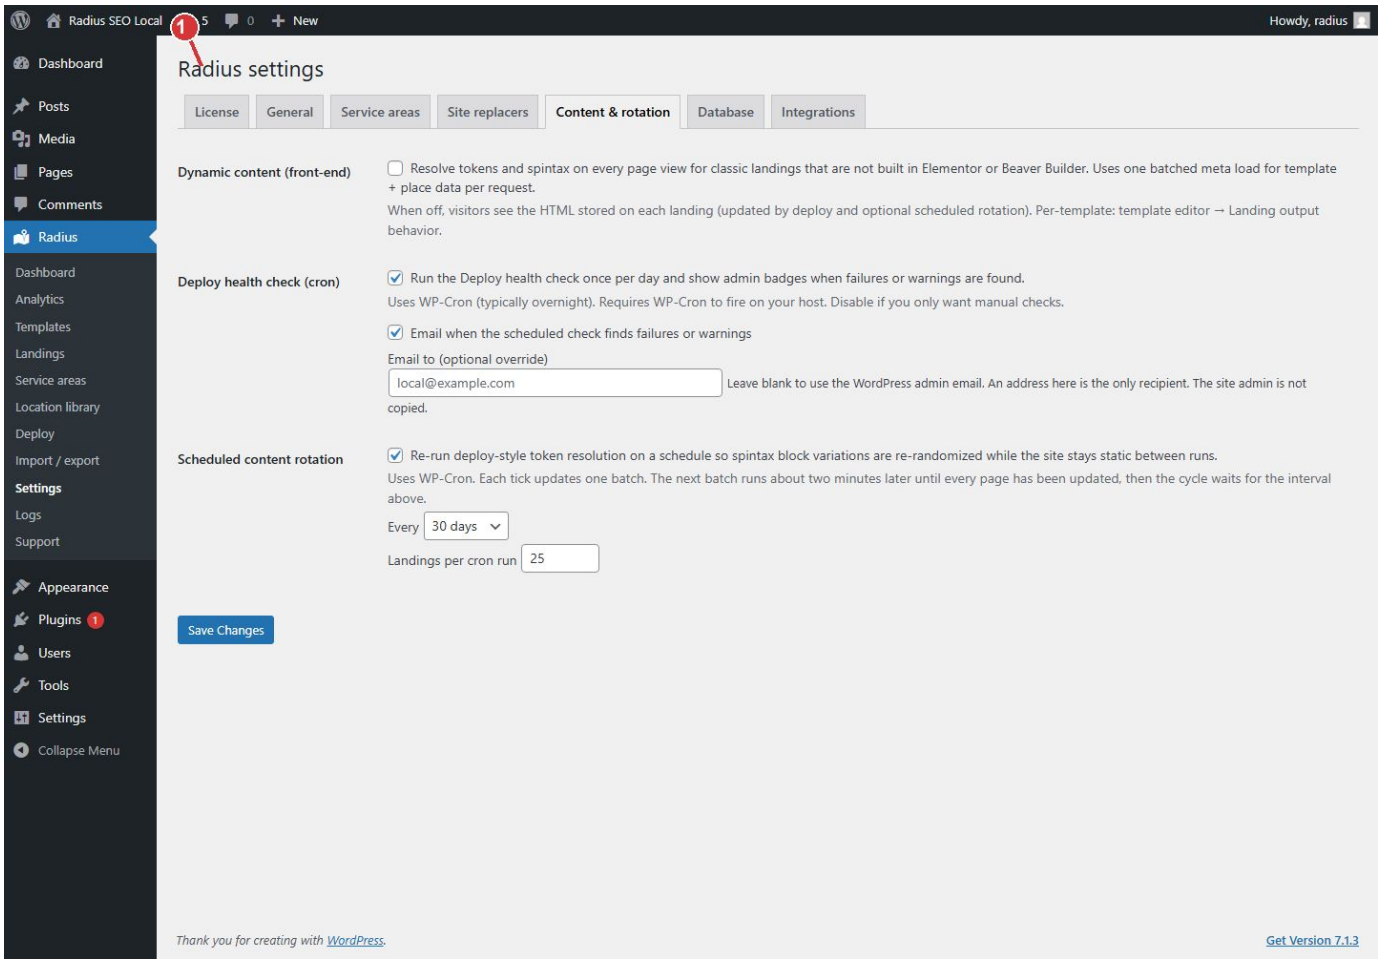

Content and rotation

1. Leave scheduled rotation off unless you want spintax rewritten on a timer.

Next


Integrations if the template uses Elementor or Beaver Builder. Otherwise Deploy.

Database

Open Radius → Settings → Database. This tab is for leftover Magic Page options after that plugin is off.

On a new site, do nothing here. Do not delete rows you do not recognize. A row still used by another plugin will not come back from this screen.

If you migrated from Magic Page and the other plugin is deactivated, this is where those leftover options are listed. Read the name before you delete one.

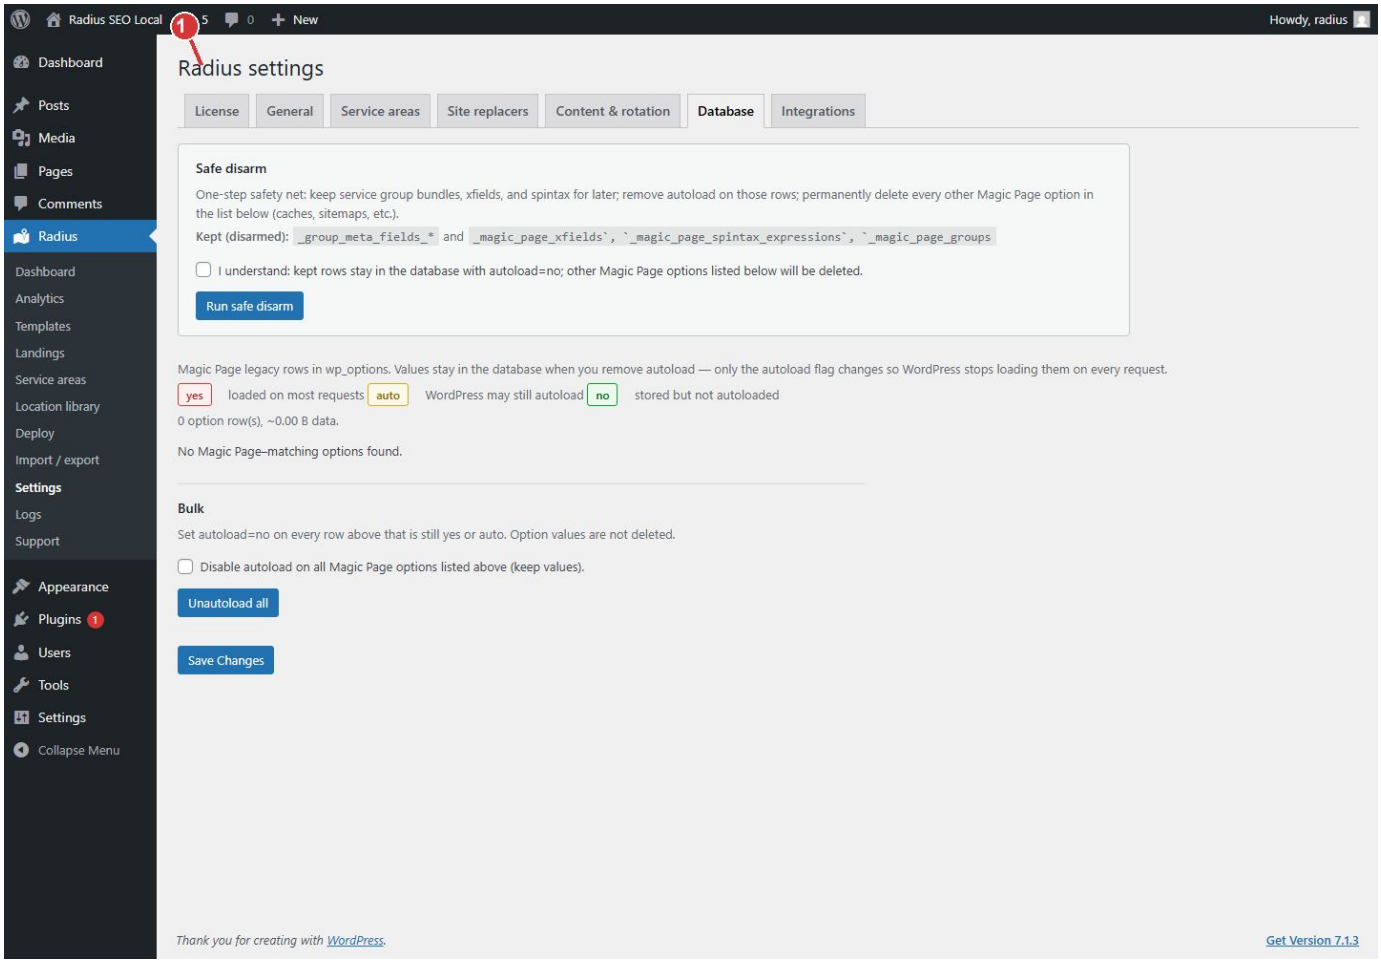

Database settings

1. Database is for leftover Magic Page options. Leave it alone on a new site.

Next

Import / export if a Magic Page library still needs to move. Otherwise leave this tab.

Integrations

Open Radius → Settings → Integrations. Turn a builder on only when a template was built in that editor. Then save, then deploy.

Steps

1. Elementor. Check Register Landings and Templates for Elementor editing only if Elementor is installed and the template is an Elementor layout. Save once so Radius can merge the post types. Then open the template and use Edit with Elementor.


2. Beaver Builder. Check the Beaver Builder box only when the template is a Beaver Builder layout. Save, then edit the template in Beaver Builder.

3. Meta copied on deploy sends matching template fields onto each landing. Tokens in those fields are replaced at deploy.

4. Click Save Changes.

5. Deploy the template again. The builder layout is copied onto each landing only when the matching switch was on at deploy time.

A template written in the normal WordPress editor does not need either box. Leaving them on does not convert a block template into an Elementor layout.

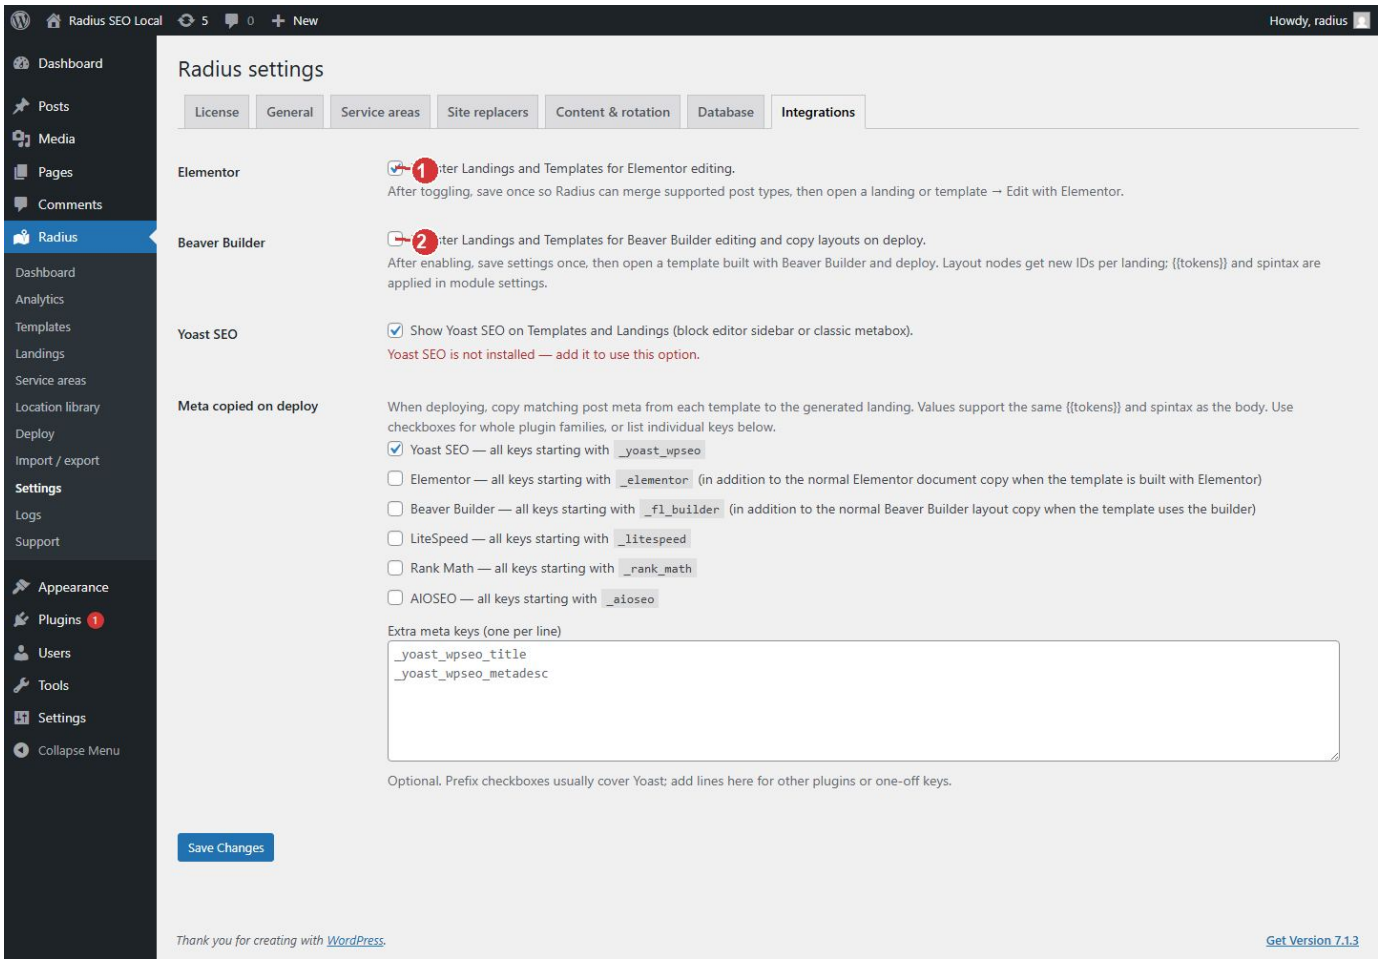

Integrations

1. Turn on Elementor only when a template was built in Elementor. Save, then deploy.

2. Turn on Beaver Builder only when a template was built in Beaver Builder. Save, then deploy.

Next

Deploy.

Logs

Open Radius → Logs after a deploy or import reports a server error.


How to read them

- The processing log is the run. It shows how far a batch got.

- The error log is the failure. Copy the message if you contact support.

Logs stay on this site. They are removed only if you confirm Delete all Radius data when deactivating. See Deactivate.

If the processing log shows a timeout, lower the deploy batch size under General and click Continue deployment. If the error names a missing template or place, open Deploy health check rather than deleting the landing.

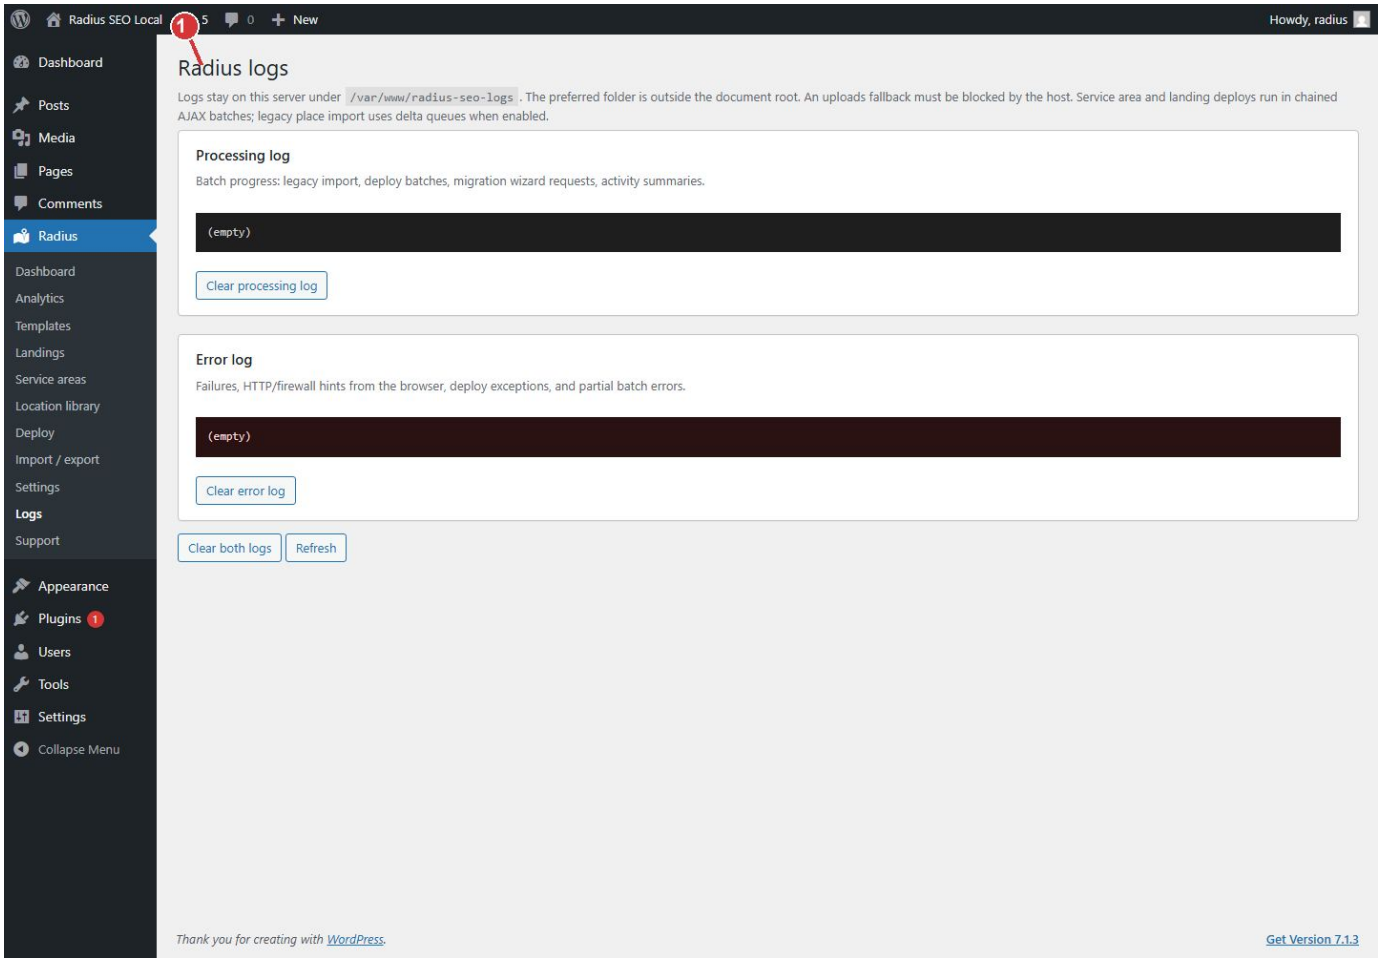

Logs

1. Open Logs when deploy or import reports a server error. The processing log is the run. The error log is the failure.

Next

Support if the log does not tell you what to change.

Support

Radius → Support emails Duppins Technology. The message is not stored on the site. Only an administrator can open this screen.

Steps

1. Open Radius → Support. You can also click Contact support in the Help panel on any other Radius screen.

2. Name and Email are filled from your WordPress user. Replies go to that email.

3. Choose the Screen that matches where you were working.

4. Enter a Subject.


5. What were you trying to do? Name the template or the place when a single page is wrong.

6. What happened? Paste the on-screen error when a batch stops.

7. Click Email support.

The message includes your name, email, the screen, the subject, both descriptions, the site address, the WordPress version, and the Radius version.

Wait a minute before sending another one. If the site cannot send mail, email support@duppinstech.com directly. Call (240) 397-8221.

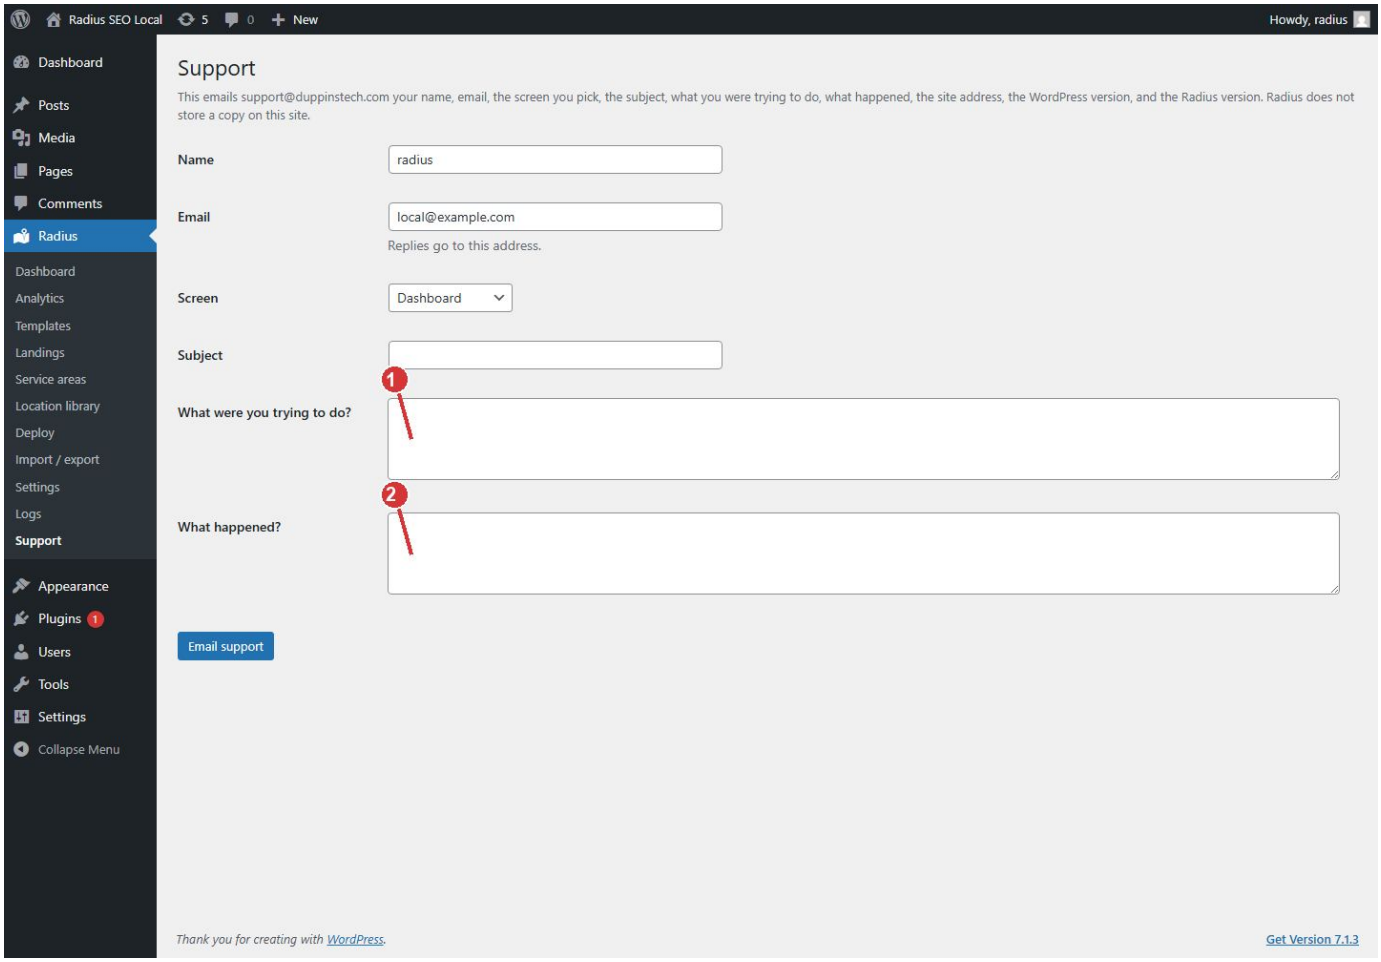

Support form

1. Describe what you were trying to do.

2. Describe what happened. Email support sends this to support@duppinstech.com and does not store a copy.

Next

Logs if you have not copied the error yet.

Deactivate

On Plugins, Deactivate under Radius SEO opens a dialog. Bulk deactivate and network deactivate do not open the dialog and do not delete Radius data.

Choices

- Keep all data and deactivate turns the plugin off and leaves landing pages, service areas, templates, places, and settings stored.

- Delete all Radius data lists what will be removed. Confirm delete removes it, then deactivates. Back returns to the first choice.

- Cancel, Close, Escape, or a click outside the dialog leaves the plugin active and deletes nothing.

After Confirm delete, keep the Plugins window open until Radius SEO turns off. If the delete stops, the plugin stays active. Choose Delete all Radius data again, or Keep all data and deactivate. Pages and places already removed stay removed.

Deleting the plugin files after it is off removes the plugin and the update-check cache. It does not remove pages or settings that were kept.

Next

Install if you activate it again later. A kept library and templates are still there. A confirmed delete is not.

Plans

Checkout is on Stripe. After checkout, Duppins Technology sends a license key. Paste it under Radius → Settings → License. The plugin does not see the payment.

Plan — Price — What you get

Single site — $9.99 per month — One site, email support

Unlimited sites — $99 per month — Unlimited sites, priority email support

- Purchase single site: https://buy.stripe.com/6oU7sK8Yt9hag4f0iJ00007

- Purchase unlimited sites: https://buy.stripe.com/4gM5kCeiN9ha8BN6H700008

A signed key can be labeled single site or unlimited. A key already saved on a site keeps working until it is replaced. Cancelling the Stripe subscription does not yet turn that key off, because there is no license server. One key is not refused on a second site until that server exists. Priority email for the unlimited plan is flagged in the Duppins Technology account. The plugin does not store or check that flag.

Support: support@duppinstech.com or (240) 397-8221.

Copyright Duppins Technology. Radius SEO is licensed under the GNU General Public License, version 2 or later. This guide describes the product. It is not a warranty.