
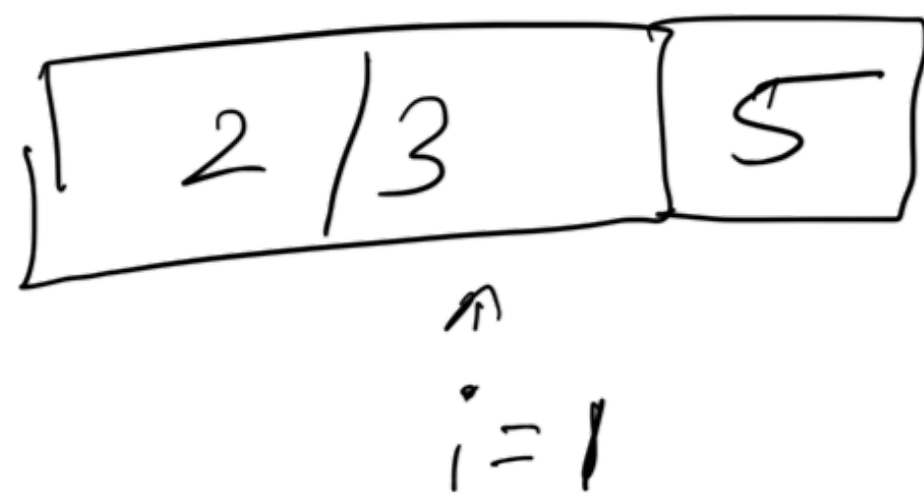
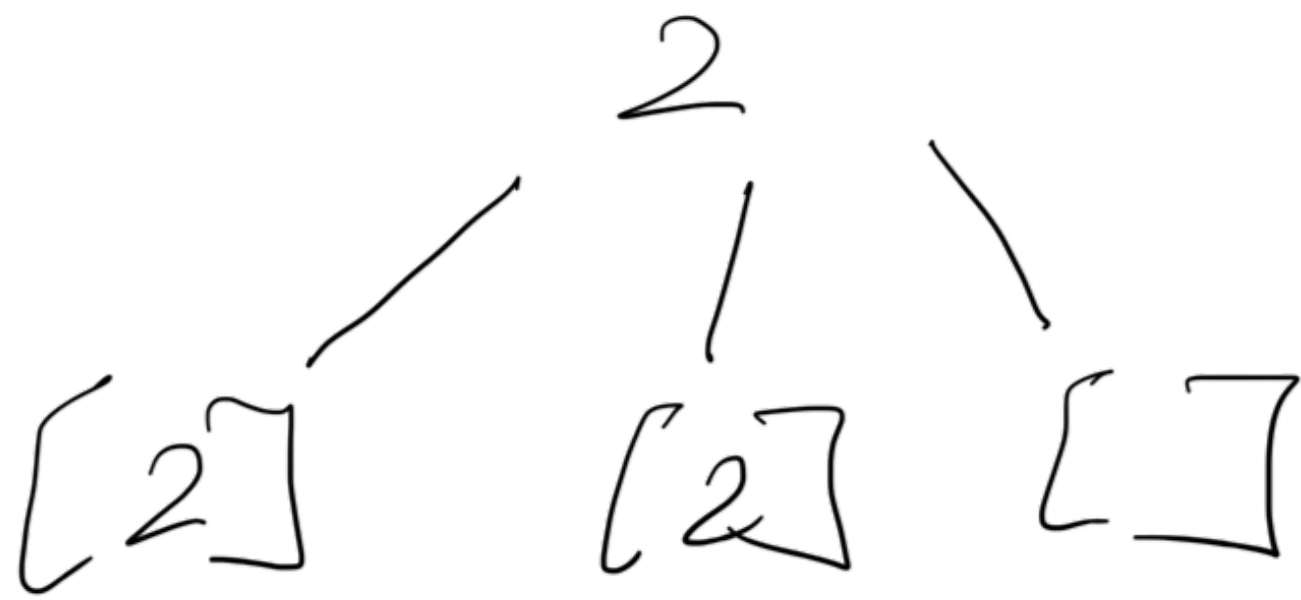
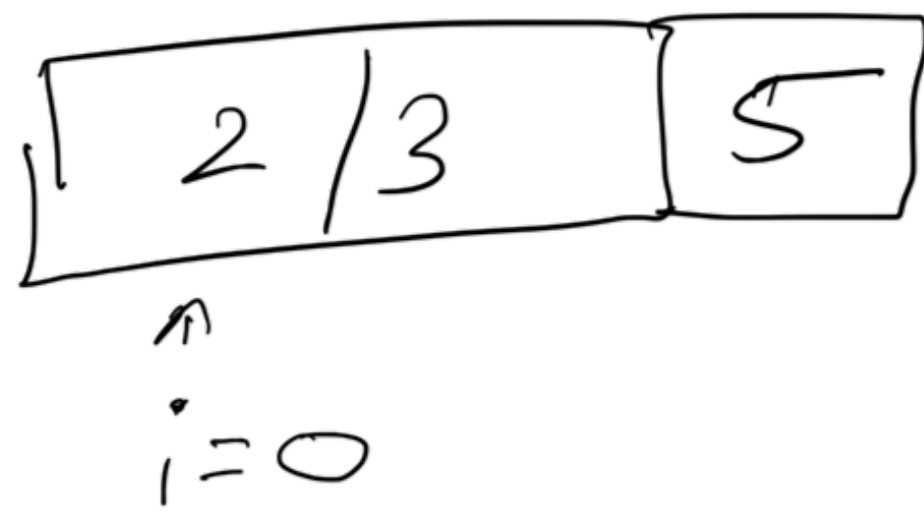


Combination sum

arr[] = [2, 3, 5] target = 8

[3, 5] & [2, 2, 2, 2]

& [2, 3, 3]

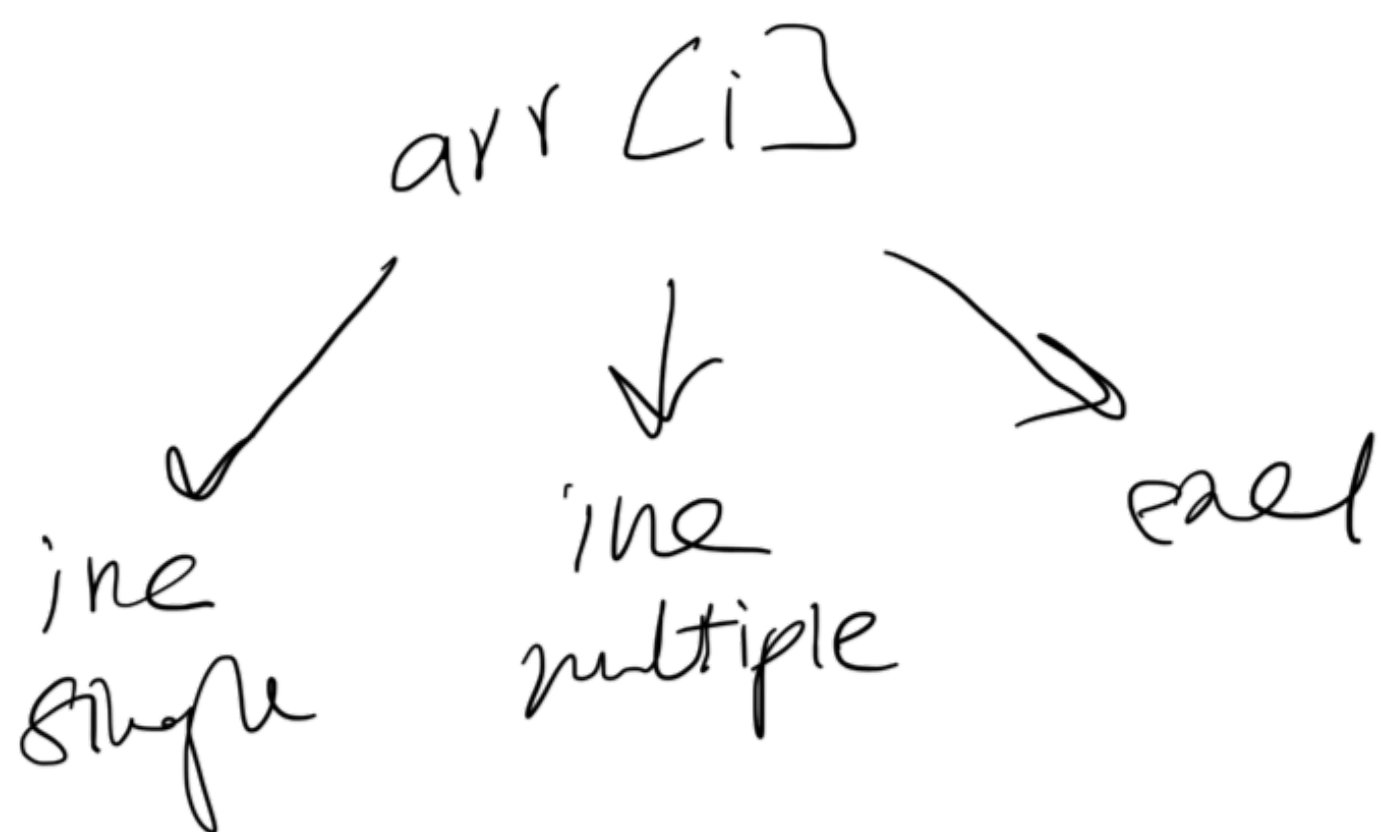

target = 8

[2] target = 6

multiple same branches we will not update i because we want to keep including it again & again

when we backtrack from here we need to exclude the element which we had included pop back

target = 3

[2, 3] i=2

target = 3

[2, 3] i=1

target = 3

[2] i=2

target = 0

[2, 3, 3] i=2

BC

Code

void combiSum(arr, i, vec<int>& combi, v<rc>& ans, tar)

if (i == n || tar < 0)

return

if (tar == 0)

ans.pb(combi)

return

combi.pb(arr[i])

cs(arr, i+1, combi, ans, tar-arr[i]) // single

cs(arr, i, combi, ans, tar-arr[i]) // multiple

combi.pop_back() // backtracking step

cs(arr, i+1, combi, ans, tar) // exclude

g