


Knight's Tour

$n = 3$

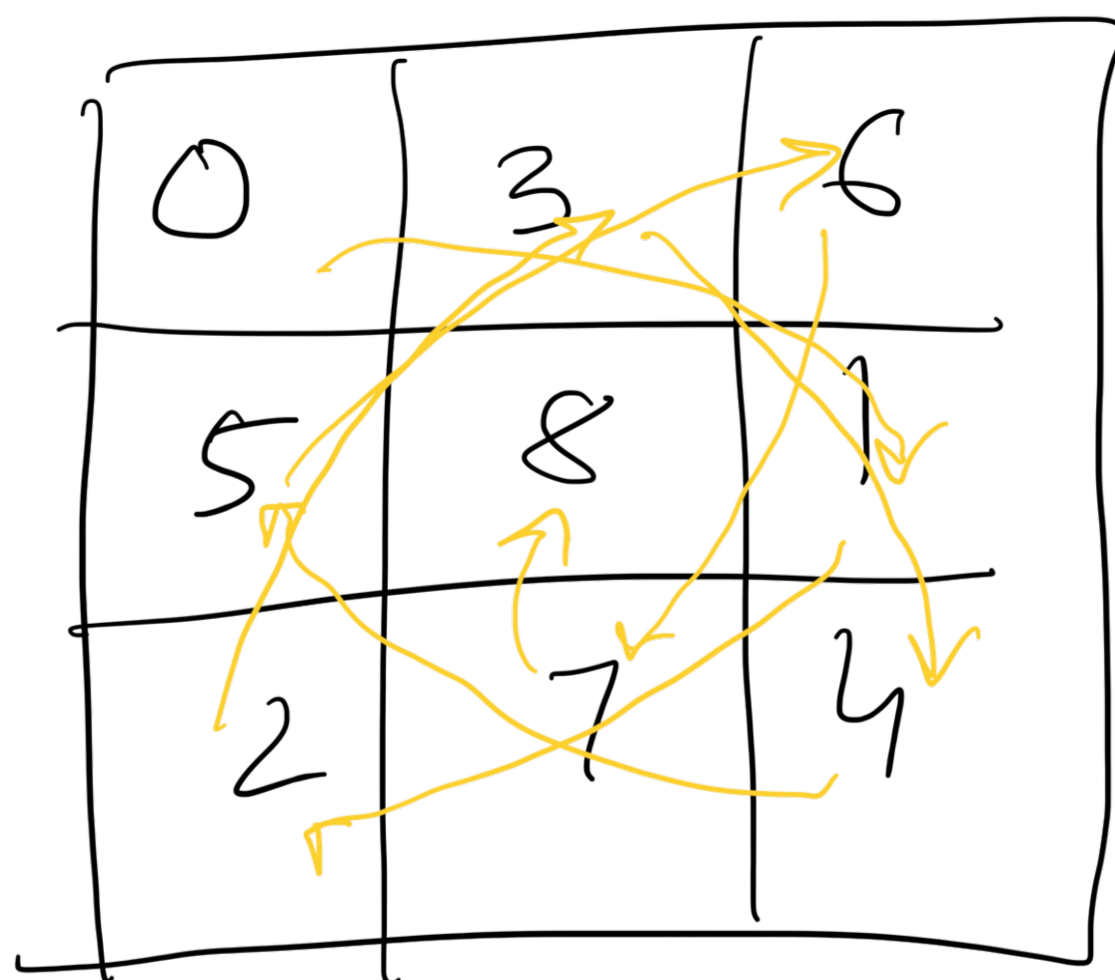

$0 \rightarrow 1 \rightarrow 2 \rightarrow 3 \rightarrow 4 \rightarrow 5 \rightarrow 6 \rightarrow 7 \rightarrow 8$

```
bool isValid (grid[3][3], r, c, n, expVal) {
```

```
    if (r < 0 || c < 0 || r >= n || c >= n  
        || grid[r][c] != expVal) {
```

```
        return false
```

```
    }
```

```
    if (expVal == n2 - 1) {
```

```
        return true
```

```
    }
```

```
    ans1 = isValid (grid, r-2, c+1, n, expVal+1)
```


```
    ans2 = isValid (grid, r-1, c+2, n, expVal+1)
```

```
    ⋮
```

```
    8 moves
```

```
    return ans1 || ans2 || ans3 ...
```

```
}
```

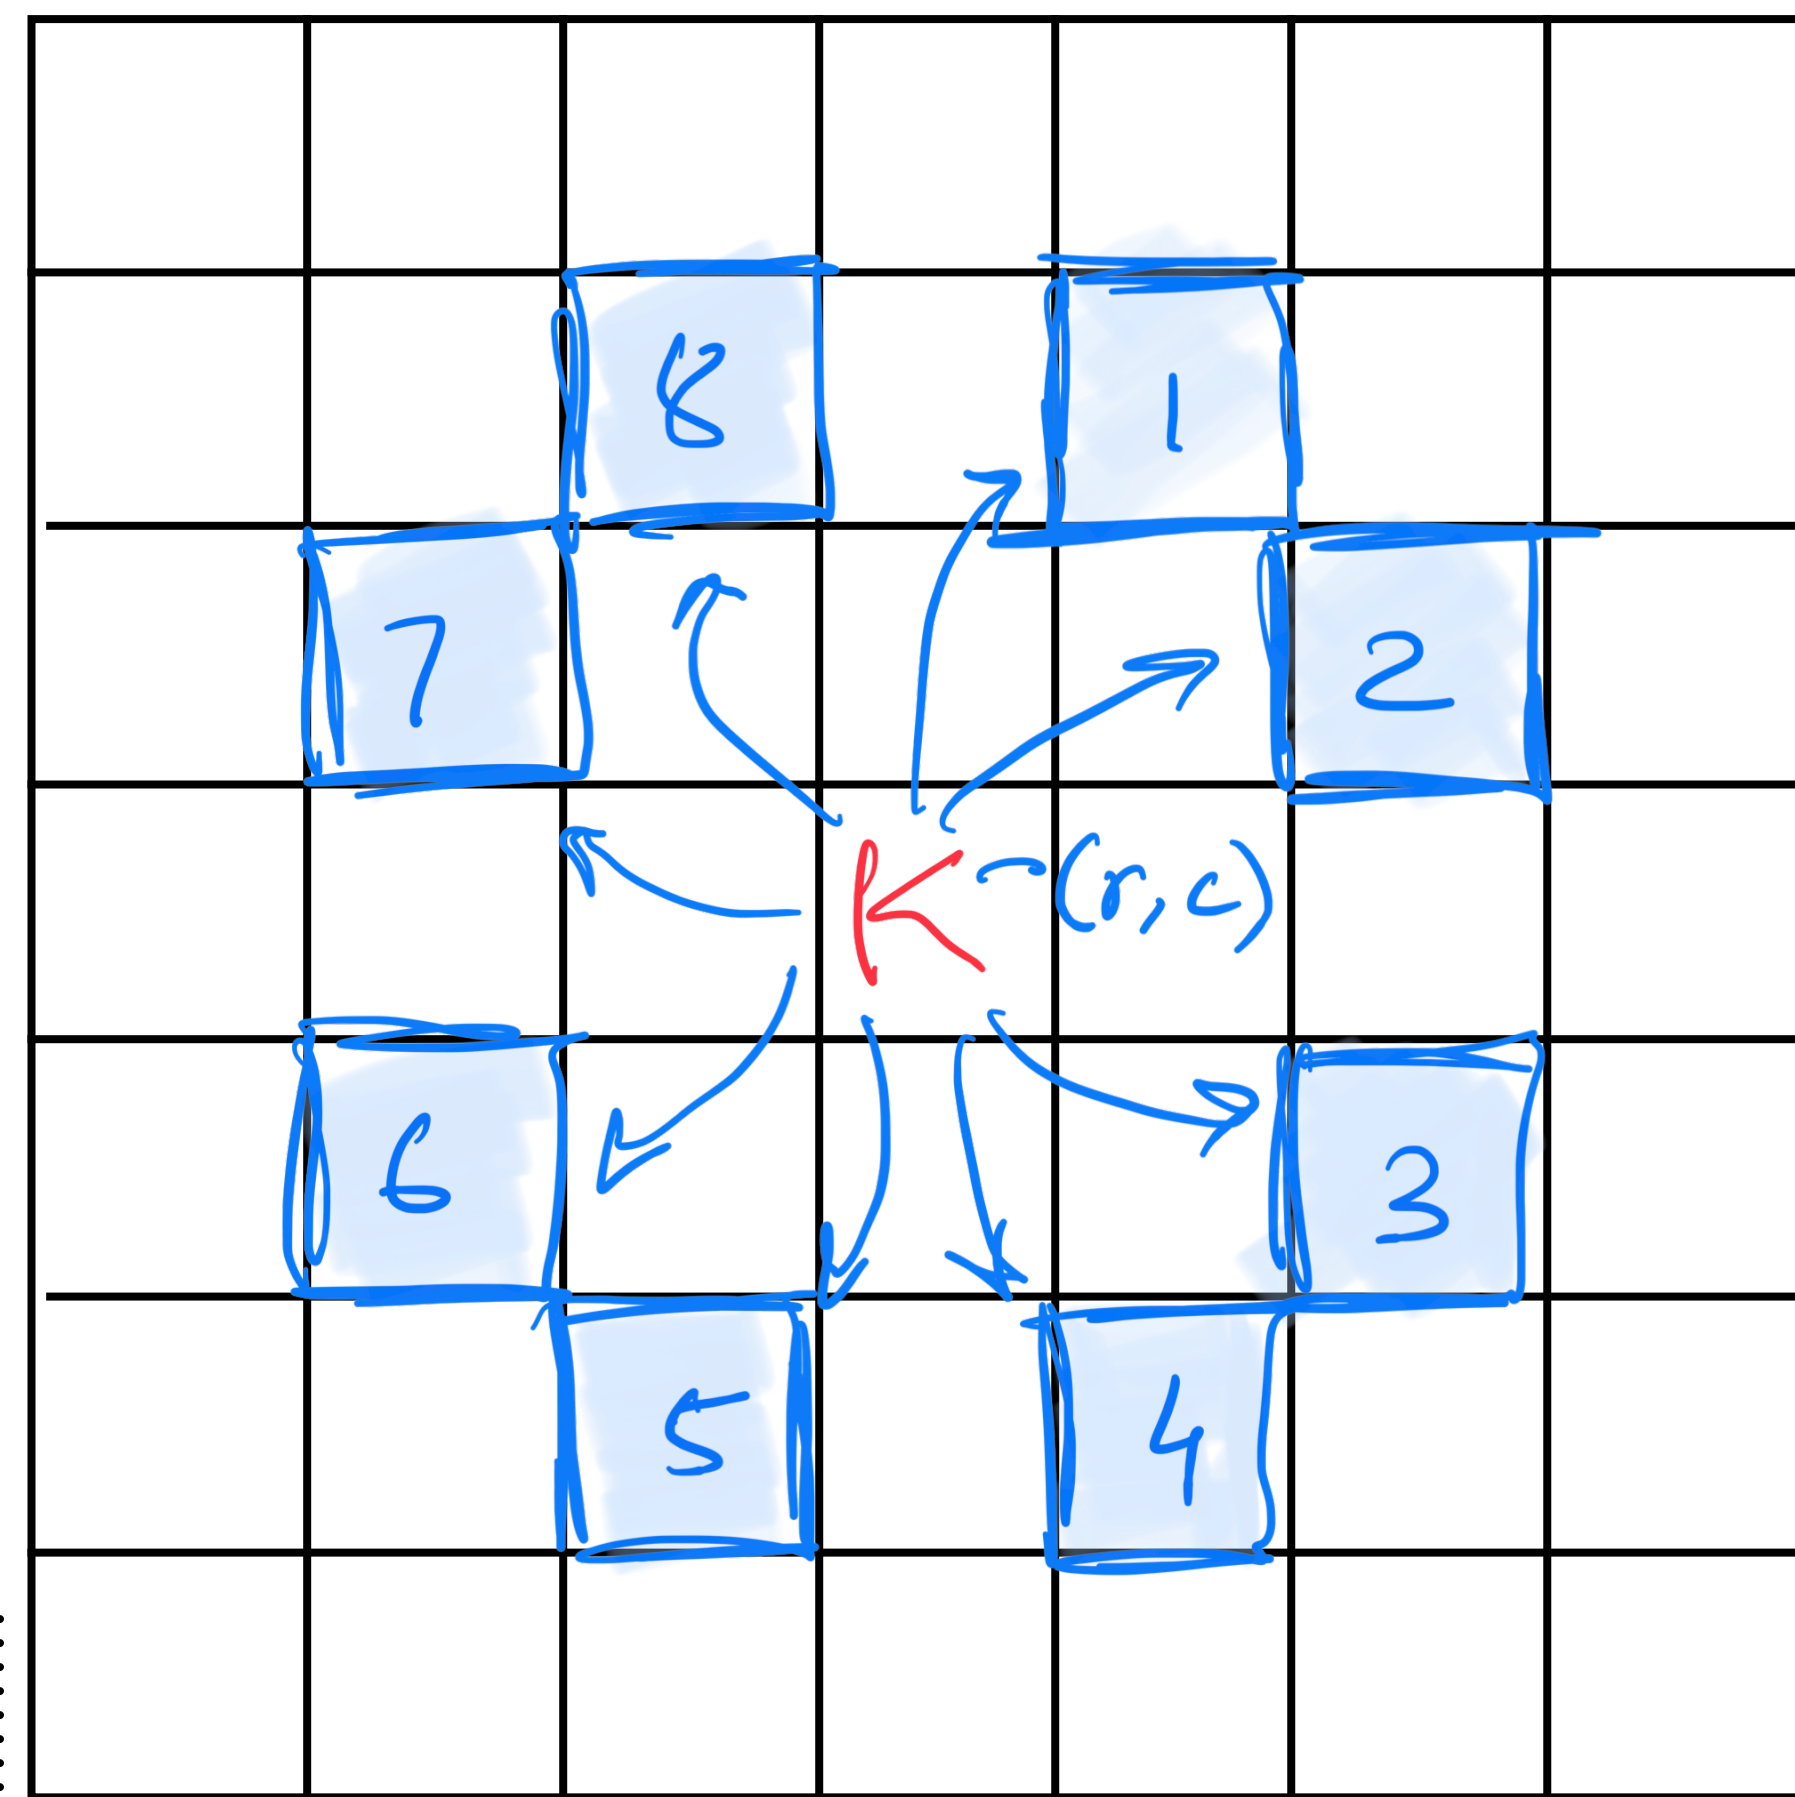

- ① $r-2, c+1$ ⑤ $r+2, c-1$
- ② $r-1, c+2$ ⑥ $r+1, c-2$
- ③ $r+1, c+2$ ⑦ $r-1, c-2$
- ④ $r+2, c+1$ ⑧ $r-2, c-1$