ŠTUDENT: ENEJ VOLMUT

DOMAČA NALOGA

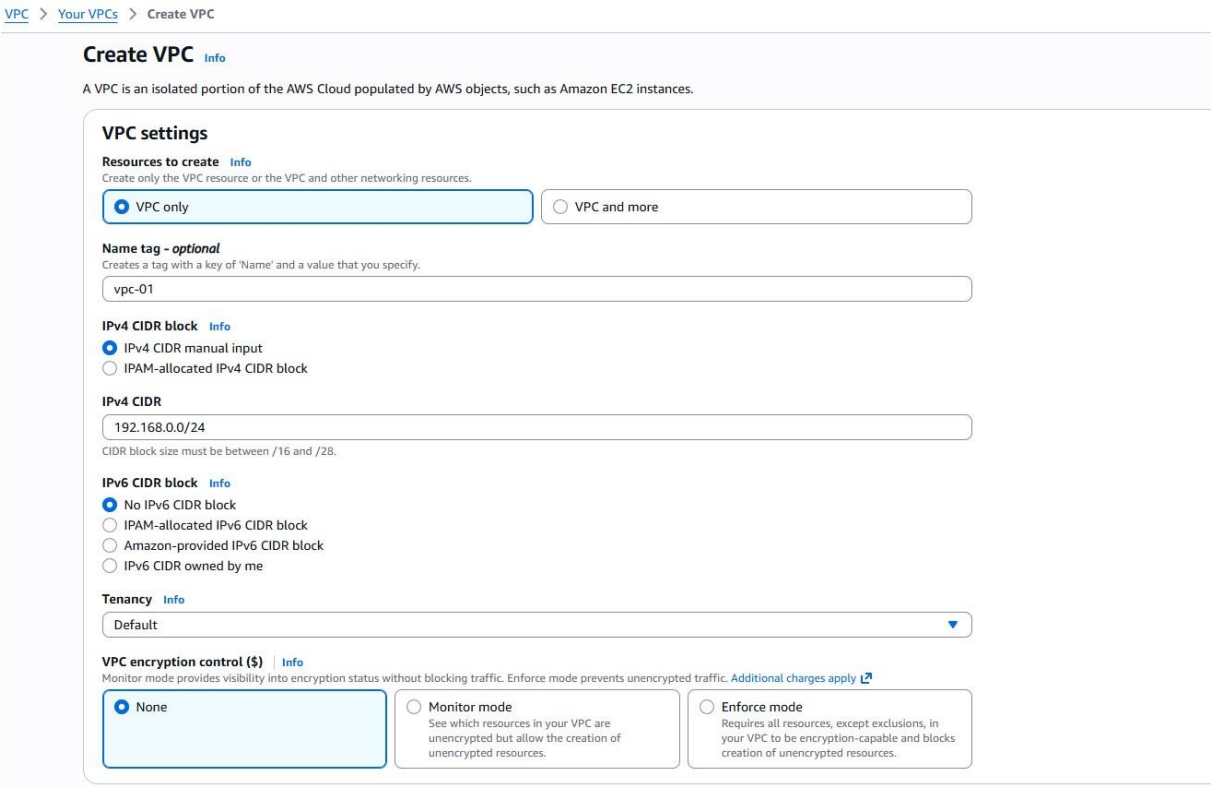

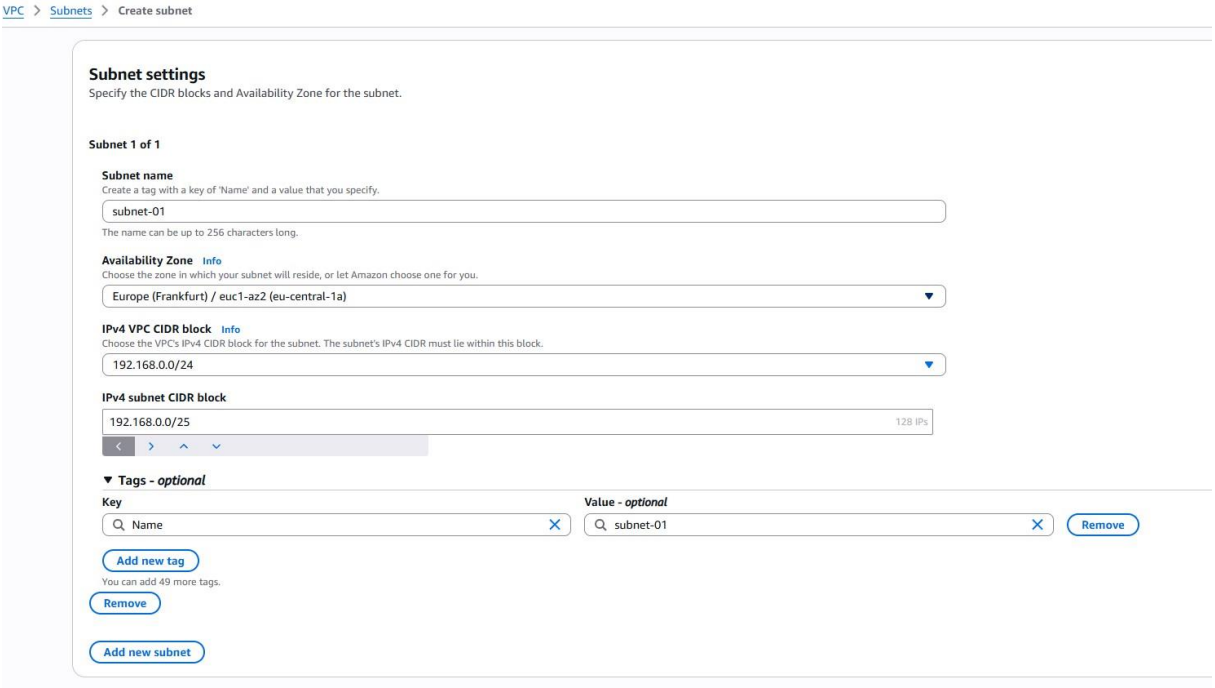

VPC > Subnets > Create subnet

Subnet settings

Specify the CIDR blocks and Availability Zone for the subnet.

Subnet 1 of 1

Subnet name
Create a tag with a key of 'Name' and a value that you specify.
subnet-02
The name can be up to 256 characters long.

Availability Zone Info
Choose the zone in which your subnet will reside, or let Amazon choose one for you.
Europe (Frankfurt) / euc1-az2 (eu-central-1a)

IPv4 VPC CIDR block Info
Choose the VPC's IPv4 CIDR block for the subnet. The subnet's IPv4 CIDR must lie within this block.
192.168.0.0/24

IPv4 subnet CIDR block
192.168.0.128/26 64 IPs

▼ **Tags - *optional***

Key	Value - *optional*	
Name	subnet-02	Remove

Add new tag
You can add 49 more tags.

Remove

Add new subnet

VPC > Subnets > Create subnet

Subnet settings

Specify the CIDR blocks and Availability Zone for the subnet.

Subnet 1 of 1

Subnet name
Create a tag with a key of 'Name' and a value that you specify.
subnet-03
The name can be up to 256 characters long.

Availability Zone Info
Choose the zone in which your subnet will reside, or let Amazon choose one for you.
Europe (Frankfurt) / euc1-az2 (eu-central-1a)

IPv4 VPC CIDR block Info
Choose the VPC's IPv4 CIDR block for the subnet. The subnet's IPv4 CIDR must lie within this block.
192.168.0.0/24

IPv4 subnet CIDR block
192.168.0.192/27 32 IPs

▼ **Tags - *optional***

Key	Value - *optional*	
Name	subnet-03	Remove

Add new tag
You can add 49 more tags.

Remove

Add new subnet

VPC > Internet gateways > Create internet gateway

Create internet gateway Info

An internet gateway is a virtual router that connects a VPC to the internet. To create a new internet gateway specify the name for the gateway below.

Internet gateway settings

Name tag
Creates a tag with a key of 'Name' and a value that you specify.
internet-gateway

Tags - *optional*

A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.

Key	Value - *optional*	
Name	internet-gateway	Remove

Add new tag
You can add 49 more tags.

Cancel Create internet gateway

VPC > Internet gateways > Attach to VPC (igw-0fe0fe5c75c5d2068)

The following internet gateway was created: igw-0fe0fe5c75c5d2068 - internet-gateway. You can now attach to a VPC to enable the VPC to communicate with the internet. Attach to a VPC

Attach to VPC (igw-0fe0fe5c75c5d2068) Info

VPC

Attach an internet gateway to a VPC to enable the VPC to communicate with the internet. Specify the VPC to attach below.

Available VPCs

Attach the internet gateway to this VPC.

vpc-0a0a397b3860a3baa

AWS Command Line Interface command

You can perform the same actions on this page by using the AWS Command Line Interface (CLI) tools. Learn more.

Platform

Choose the platform from which you'll be running this command. The command parameters may be specified differently depending on the platform. Learn more about specifying parameter values.

Linux/Unix/OS X

CLI command

If you're using the AWS CLI tools, you can copy and paste this command - which includes the parameters you specified on this page - into your command line prompt or terminal. Learn more about the available AWS CLI commands.

```
aws ec2 attach-internet-gateway --vpc-id "vpc-0a0a397b3860a3baa" --internet-gateway-id "igw-0fe0fe5c75c5d2068" --region eu-central-1
```

Copy

Cancel Attach internet gateway

VPC > Route tables > rtb-0d8aba24faccca07d > Edit routes

Edit routes

Destination	Target	Status	Propagated	Route Origin	
192.168.0.0/24	local	Active	No	CreateRouteTable	
0.0.0.0/0	Internet Gateway igw-0fe0fe5c75c5d2068	-	No	CreateRoute	Remove

Add route

Cancel Preview Save changes

VPC > Security Groups > Create security group

Create security group Info

A security group acts as a virtual firewall for your instance to control inbound and outbound traffic. To create a new security group, complete the fields below.

Basic details

Security group name Info

sg-01

Name cannot be edited after creation.

Description Info

Dovoljuje HTTP in SSH promet za spletni streznik

VPC Info

vpc-0a0a397b3860a3baa (vpc-01)

Inbound rules Info

Type Info	Protocol Info	Port range Info	Source Info		Description - optional Info	
HTTP	TCP	80	Anywhe...	0.0.0.0/0		Delete
SSH	TCP	22	Anywhe...	0.0.0.0/0		Delete

Add rule

Rules with source of 0.0.0.0/0 or ::/0 allow all IP addresses to access your instance. We recommend setting security group rules to allow access from known IP addresses only.

Outbound rules Info

Type Info	Protocol Info	Port range Info	Destination Info		Description - optional Info	
All traffic	All	All	Custom			Delete

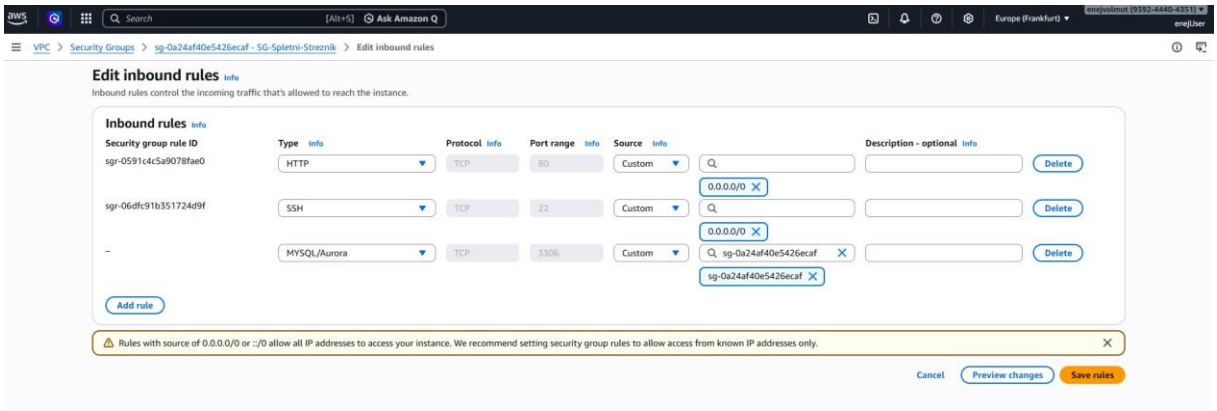
Search
[Alt+S]
Ask Amazon Q
Europe (Frankfurt)
VPC > Security Groups > sg-0a24af40e5426ecaf - SG-Spletni-Streznik > Edit inbound rules
Edit inbound rules Info
Inbound rules control the incoming traffic that's allowed to reach the instance.
Inbound rules Info
Security group rule ID
Type Info
Protocol Info
Port range Info
Source Info
Description - optional Info
sgr-0591c4c5a9078fae0
HTTP
TCP
80
Custom
0.0.0.0/0
Delete
sgr-06dfc91b351724d9f
SSH
TCP
22
Custom
0.0.0.0/0
Delete
-
MYSQL/Aurora
TCP
3306
Custom
sg-0a24af40e5426ecaf
sg-0a24af40e5426ecaf
Delete
Add rule
Rules with source of 0.0.0.0/0 or ::/0 allow all IP addresses to access your instance. We recommend setting security group rules to allow access from known IP addresses only.
Cancel
Preview changes
Save rules

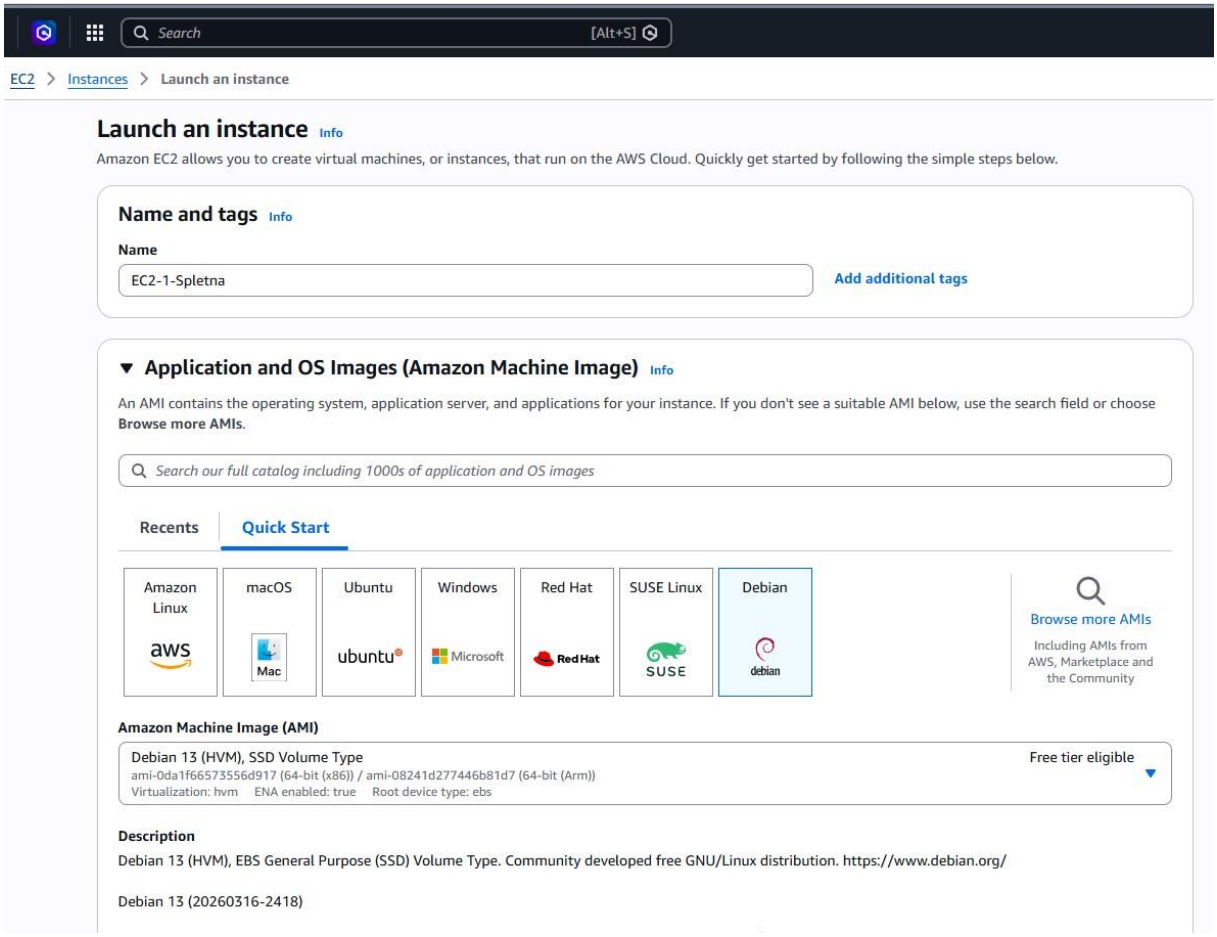
Search
[Alt+S]
EC2 > Instances > Launch an instance
Launch an instance Info
Amazon EC2 allows you to create virtual machines, or instances, that run on the AWS Cloud. Quickly get started by following the simple steps below.
Name and tags Info
Name
EC2-1-Spletna
Add additional tags
Application and OS Images (Amazon Machine Image) Info
An AMI contains the operating system, application server, and applications for your instance. If you don't see a suitable AMI below, use the search field or choose Browse more AMIs.
Search our full catalog including 1000s of application and OS images
Recents
Quick Start
Amazon Linux
macOS
Ubuntu
Windows
Red Hat
SUSE Linux
Debian
Browse more AMIs
Including AMIs from AWS, Marketplace and the Community
Amazon Machine Image (AMI)
Debian 13 (HVM), SSD Volume Type
Free tier eligible
ami-0da1f66573556d917 (64-bit (x86)) / ami-08241d277446b81d7 (64-bit (Arm))
Virtualization: hvm ENA enabled: true Root device type: ebs
Description
Debian 13 (HVM), EBS General Purpose (SSD) Volume Type. Community developed free GNU/Linux distribution. https://www.debian.org/
Debian 13 (20260316-2418)

EC2 > Instances > Launch an instance

Additional costs apply for AMIs with pre-installed software

Key pair (login) Info

You can use a key pair to securely connect to your instance. Ensure that you have access to the selected key pair before you launch the instance.

Key pair name - *required*

alma2026dn

Create new key pair

Network settings Info

VPC - *required* | Info

vpc-0a0a397b3860a3baa (vpc-01)
192.168.0.0/24

Subnet | Info

subnet-037def150d729b19a subnet-01
VPC: vpc-0a0a397b3860a3baa Owner: 939244404351 Availability Zone: eu-central-1a (euc1-az2)
Zone type: Availability Zone IP addresses available: 123 CIDR: 192.168.0.0/25)

Create new subnet

Auto-assign public IP | Info

Enable

Firewall (security groups) | Info

A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.

- ○ Create security group
- ◉ Select existing security group

Common security groups | Info

Select security groups

Compare security group rules

SG-Spletni-Streznik sg-0a24af40e5426ecaf ✕
VPC: vpc-0a0a397b3860a3baa

Security groups that you add or remove here will be added to or removed from all your network interfaces.

▶ **Advanced network configuration**

VPC > Security Groups > sg-0ace9fc631e7786b0 - SG-Baza

VPC dashboard
AWS Global View
Filter by VPC:
▼ Virtual private cloud
Your VPCs
Subnets
Route tables
Internet gateways
Egress-only Internet gateways
Carrier gateways
DHCP option sets
Elastic IPs
Managed prefix lists
NAT gateways
Peering connections
Route servers
▼ Security
Network ACLs

sg-0ace9fc631e7786b0 - SG-Baza

Actions

Details

Security group name	Security group ID	Description	VPC ID
SG-Baza	sg-0ace9fc631e7786b0	Dovoljuje MySQL promet samo iz spletnega streznika.	vpc-0a0a397b3860a3baa
Owner	**Inbound rules count**	**Outbound rules count**	
939244404351	1 Permission entry	1 Permission entry	

Inbound rules | Outbound rules | Sharing | VPC associations | Related resources - *new* | Tags

Inbound rules (1)

Manage tags | Edit inbound rules

Search

Name	Security group rule ID	IP version	Type	Protocol	Port range	Source	Description
–	sgr-008a97a14ed0fd132	–	MYSQL/Aurora	TCP	3306	sg-0a24af40e5426ecaf ...	–

EC2 > Instances > Launch an instance

It seems like you may be new to launching instances in EC2. Take a walkthrough to learn about EC2, how to launch instances and about best practices

Launch an instance Info

Amazon EC2 allows you to create virtual machines, or instances, that run on the AWS Cloud. Quickly get started by following the simple steps below.

Name and tags Info

Name

EC2-2-Baza

Add additional tags

Application and OS Images (Amazon Machine Image) Info

An AMI contains the operating system, application server, and applications for your instance. If you don't see a suitable AMI below, use the search field or choose **Browse more AMIs**.

Search our full catalog including 1000s of application and OS images

Recents | Quick Start

Amazon Linux | macOS | Ubuntu | Windows | Red Hat | SUSE Linux | Debian

Browse more AMIs

Including AMIs from AWS, Marketplace and the Community

Amazon Machine Image (AMI)

Debian 13 (HVM), SSD Volume Type — Free tier eligible

ami-0da1f66573556d917 (64-bit (x86)) / ami-08241d277446b81d7 (64-bit (Arm))

Virtualization: hvm ENA enabled: true Root device type: ebs

Description

Debian 13 (HVM), EBS General Purpose (SSD) Volume Type. Community developed free GNU/Linux distribution. https://www.debian.org/

EC2 > Instances > Launch an instance

Key pair (login) Info

You can use a key pair to securely connect to your instance. Ensure that you have access to the selected key pair before you launch the instance.

Key pair name - *required*

alma2026dn

Create new key pair

Network settings Info

VPC - *required* Info

vpc-0a0a397b3860a3baa (vpc-01)

192.168.0.0/24

Subnet Info

subnet-04334f409ab036768 subnet-02

VPC: vpc-0a0a397b3860a3baa Owner: 939244404351 Availability Zone: eu-central-1a (euc1-az2)

Zone type: Availability Zone IP addresses available: 58 CIDR: 192.168.0.128/26)

Create new subnet

Auto-assign public IP Info

Disable

Firewall (security groups) Info

A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.

Create security group | Select existing security group

Common security groups Info

Select security groups

Compare security group rules

SG-Baza sg-0ace9fc631e7786b0

VPC: vpc-0a0a397b3860a3baa

Security groups that you add or remove here will be added to or removed from all your network interfaces.

Advanced network configuration

EC2 > Instances > Launch an instance

Launch an instance Info

Amazon EC2 allows you to create virtual machines, or instances, that run on the AWS Cloud. Quickly get started by following the simple steps below.

Name and tags Info

Name

EC2-3-Baza

Add additional tags

Application and OS Images (Amazon Machine Image) Info

An AMI contains the operating system, application server, and applications for your instance. If you don't see a suitable AMI below, use the search field or choose **Browse more AMIs**.

Search our full catalog including 1000s of application and OS images

Recents | Quick Start

Amazon Linux | macOS | Ubuntu | Windows | Red Hat | SUSE Linux | Debian

Browse more AMIs

Including AMIs from AWS, Marketplace and the Community

Amazon Machine Image (AMI)

Debian 13 (HVM), SSD Volume Type — Free tier eligible

ami-0da1f66573556d917 (64-bit (x86)) / ami-08241d277446b81d7 (64-bit (Arm))

Virtualization: hvm ENA enabled: true Root device type: ebs

Description

Debian 13 (HVM), EBS General Purpose (SSD) Volume Type. Community developed free GNU/Linux distribution. https://www.debian.org/

Debian 13 (20260316-2418)

Key pair (login) Info

You can use a key pair to securely connect to your instance. Ensure that you have access to the selected key pair before you launch the instance.

Key pair name - *required*

alma2026dn

Create new key pair

Network settings Info

VPC - *required* | Info

vpc-0a0a397b3860a3baa (vpc-01)

192.168.0.0/24

Subnet | Info

subnet-0ab5a7964397fa49e subnet-03

VPC: vpc-0a0a397b3860a3baa Owner: 939244404351 Availability Zone: eu-central-1a (euc1-az2)

Zone type: Availability Zone IP addresses available: 27 CIDR: 192.168.0.192/27)

Create new subnet

Auto-assign public IP | Info

Disable

Firewall (security groups) | Info

A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.

Create security group | Select existing security group

Common security groups | Info

Select security groups

Compare security group rules

SG-Baza sg-0ace9fc631e7786b0

VPC: vpc-0a0a397b3860a3baa

Security groups that you add or remove here will be added to or removed from all your network interfaces.

Advanced network configuration

EC2 > Instances > Launch an instance

Enabled

Metadata IPv6 endpoint | Info

Select

Metadata version | Info

V2 only (token required)

For V2 requests, you must include a session token in all instance metadata requests.
Applications or agents that use V1 for instance metadata access will break.

Metadata response hop limit | Info

2

Allow tags in metadata | Info

Select

User data - *optional* | Info

Upload a file with your user data or enter it in the field.

Choose file

```
#!/bin/bash
apt update -y
apt install mariadb-server -y
systemctl start mariadb
systemctl enable mariadb
```

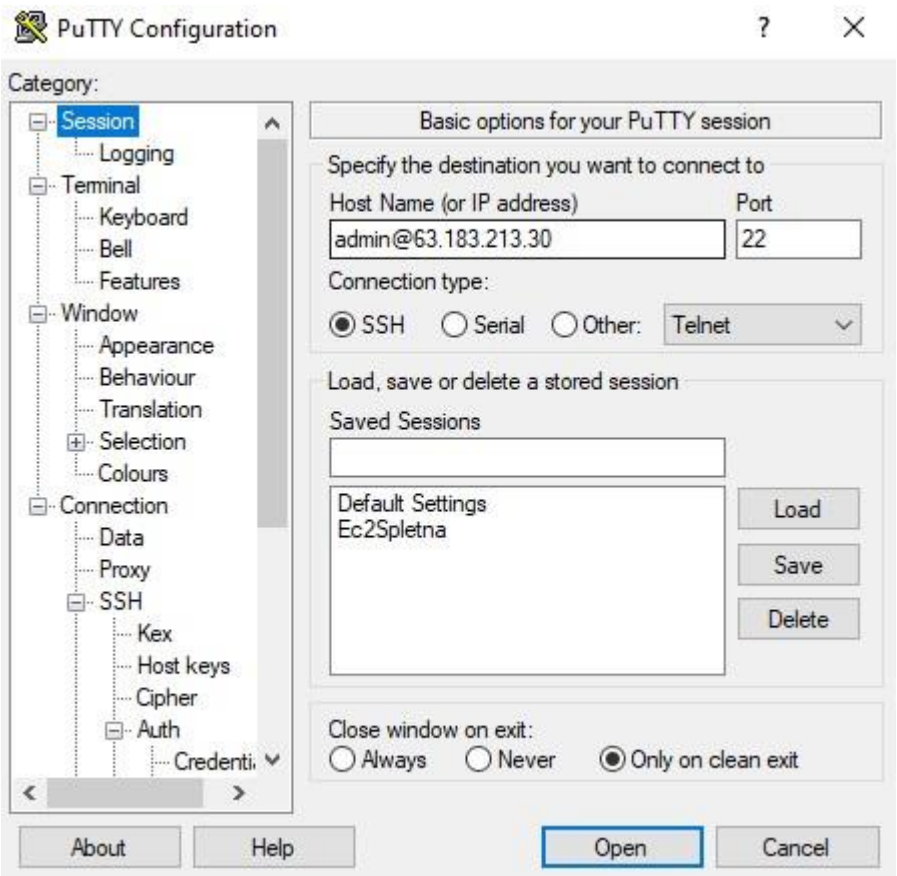
PuTTY Configuration
Category:
Session
Logging
Terminal
Keyboard
Bell
Features
Window
Appearance
Behaviour
Translation
Selection
Colours
Connection
Data
Proxy
SSH
Kex
Host keys
Cipher
Auth
Credenti
Basic options for your PuTTY session
Specify the destination you want to connect to
Host Name (or IP address)
Port
admin@63.183.213.30
22
Connection type:
SSH
Serial
Other:
Telnet
Load, save or delete a stored session
Saved Sessions
Default Settings
Ec2Spletna
Load
Save
Delete
Close window on exit:
Always
Never
Only on clean exit
About
Help
Open
Cancel

admin@ip-192-168-0-11: ~

```
Using username "admin".
Authenticating with public key "alma2026dn"
Linux ip-192-168-0-11 6.12.74+deb13+1-cloud-amd64 #1 SMP PREEMPT_DYNAMIC Debian
6.12.74-2 (2026-03-08) x86_64

The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
admin@ip-192-168-0-11:~$ sudo apt update
Get:1 file:/etc/apt/mirrors/debian.list Mirrorlist [38 B]
Get:2 file:/etc/apt/mirrors/debian-security.list Mirrorlist [47 B]
Get:3 https://cdn-aws.deb.debian.org/debian trixie InRelease [140 kB]
Get:4 https://cdn-aws.deb.debian.org/debian trixie-updates InRelease [47.3 kB]
Get:5 https://cdn-aws.deb.debian.org/debian trixie-backports InRelease [54.0 kB]
Get:6 https://cdn-aws.deb.debian.org/debian-security trixie-security InRelease [
43.4 kB]
Get:7 https://cdn-aws.deb.debian.org/debian trixie/main Sources [10.5 MB]
Get:8 https://cdn-aws.deb.debian.org/debian trixie/main amd64 Packages [9671 kB]
Get:9 https://cdn-aws.deb.debian.org/debian trixie/main Translation-en [6484 kB]
Get:10 https://cdn-aws.deb.debian.org/debian trixie-updates/main Sources [2788 B
]
Get:11 https://cdn-aws.deb.debian.org/debian trixie-updates/main amd64 Packages
[5412 B]
Get:12 https://cdn-aws.deb.debian.org/debian trixie-updates/main Translation-en
[4096 B]
Get:13 https://cdn-aws.deb.debian.org/debian trixie-backports/main Sources [190
kB]
Get:14 https://cdn-aws.deb.debian.org/debian trixie-backports/main amd64 Package
s [211 kB]
Get:15 https://cdn-aws.deb.debian.org/debian trixie-backports/main Translation-e
n [159 kB]
Get:16 https://cdn-aws.deb.debian.org/debian-security trixie-security/main Sourc
es [127 kB]
Get:17 https://cdn-aws.deb.debian.org/debian-security trixie-security/main amd64
 Packages [123 kB]
Get:18 https://cdn-aws.deb.debian.org/debian-security trixie-security/main Trans
lation-en [77.3 kB]
Fetched 27.9 MB in 2s (11.3 MB/s)
11 packages can be upgraded. Run 'apt list --upgradable' to see them.
admin@ip-192-168-0-11:~$ sudo apt install apache2 php php-mysql -y
Installing:
  apache2  php  php-mysql

Installing dependencies:
  apache2-bin              libargon2-1          php8.4
  apache2-data             libgdbm-compat4t64   php8.4-cli
  apache2-utils            libjansson4          php8.4-common
  libapache2-mod-php8.4    liblua5.4-0          php8.4-mysql
  libaprlt64               libperl5.40          php8.4-opcache
  libaprutill-dbd-sqlite3  perl                 php8.4-readline
  libaprutill-ldap         perl-modules-5.40    ssl-cert
  libaprutillt64           php-common

Suggested packages:
  apache2-doc              perl-doc
  apache2-suexec-pristine  libterm-readline-gnu-perl
  | apache2-suexec-custom  | libterm-readline-perl-perl
  ufw                      make
  www-browser              libtap-harness-archive-perl
  php-pear
```

admin@ip-192-168-0-11: ~

```
Enabling module setenvif.
Enabling module filter.
Enabling module deflate.
Enabling module status.
Enabling module reqtimeout.
Enabling conf charset.
Enabling conf localized-error-pages.
Enabling conf other-vhosts-access-log.
Enabling conf security.
Enabling conf serve-cgi-bin.
Enabling site 000-default.
info: Switch to mpm prefork for package libapache2-mod-php8.4
Module mpm_event disabled.
Enabling module mpm_prefork.
info: Executing deferred 'a2enmod php8.4' for package libapache2-mod-php8.4
Enabling module php8.4.
Created symlink '/etc/systemd/system/multi-user.target.wants/apache2.service' →
'/usr/lib/systemd/system/apache2.service'.
Created symlink '/etc/systemd/system/multi-user.target.wants/apache-htcacheclean
.service' → '/usr/lib/systemd/system/apache-htcacheclean.service'.
Processing triggers for man-db (2.13.1-1) ...
Processing triggers for libc-bin (2.41-12+deb13u2) ...
Processing triggers for php8.4-cli (8.4.16-1~deb13u1) ...
Processing triggers for libapache2-mod-php8.4 (8.4.16-1~deb13u1) ...
admin@ip-192-168-0-11:~$ sudo systemctl status apache2
● apache2.service - The Apache HTTP Server
     Loaded: loaded (/usr/lib/systemd/system/apache2.service; enabled; preset: >
     Active: active (running) since Wed 2026-04-15 18:33:01 UTC; 26s ago
 Invocation: 2c6345534ba94d5fb0e06c83ab27f559
       Docs: https://httpd.apache.org/docs/2.4/
   Main PID: 8347 (apache2)
      Tasks: 6 (limit: 1097)
     Memory: 14.7M (peak: 15M)
        CPU: 101ms
     CGroup: /system.slice/apache2.service
             ├─8347 /usr/sbin/apache2 -k start
             ├─8350 /usr/sbin/apache2 -k start
             ├─8351 /usr/sbin/apache2 -k start
             ├─8352 /usr/sbin/apache2 -k start
             ├─8353 /usr/sbin/apache2 -k start
             └─8354 /usr/sbin/apache2 -k start

Apr 15 18:33:01 ip-192-168-0-11 systemd[1]: Starting apache2.service - The Apac>
Apr 15 18:33:01 ip-192-168-0-11 apachectl[8346]: AH00558: apache2: Could not re>
Apr 15 18:33:01 ip-192-168-0-11 systemd[1]: Started apache2.service - The Apach>
lines 1-20/20 (END)...skipping...
● apache2.service - The Apache HTTP Server
     Loaded: loaded (/usr/lib/systemd/system/apache2.service; enabled; preset: enabled)
     Active: active (running) since Wed 2026-04-15 18:33:01 UTC; 26s ago
 Invocation: 2c6345534ba94d5fb0e06c83ab27f559
       Docs: https://httpd.apache.org/docs/2.4/
   Main PID: 8347 (apache2)
      Tasks: 6 (limit: 1097)
     Memory: 14.7M (peak: 15M)
        CPU: 101ms
     CGroup: /system.slice/apache2.service
             ├─8347 /usr/sbin/apache2 -k start
             ├─8350 /usr/sbin/apache2 -k start
             ├─8351 /usr/sbin/apache2 -k start
             ├─8352 /usr/sbin/apache2 -k start
             ├─8353 /usr/sbin/apache2 -k start
             └─8354 /usr/sbin/apache2 -k start
```

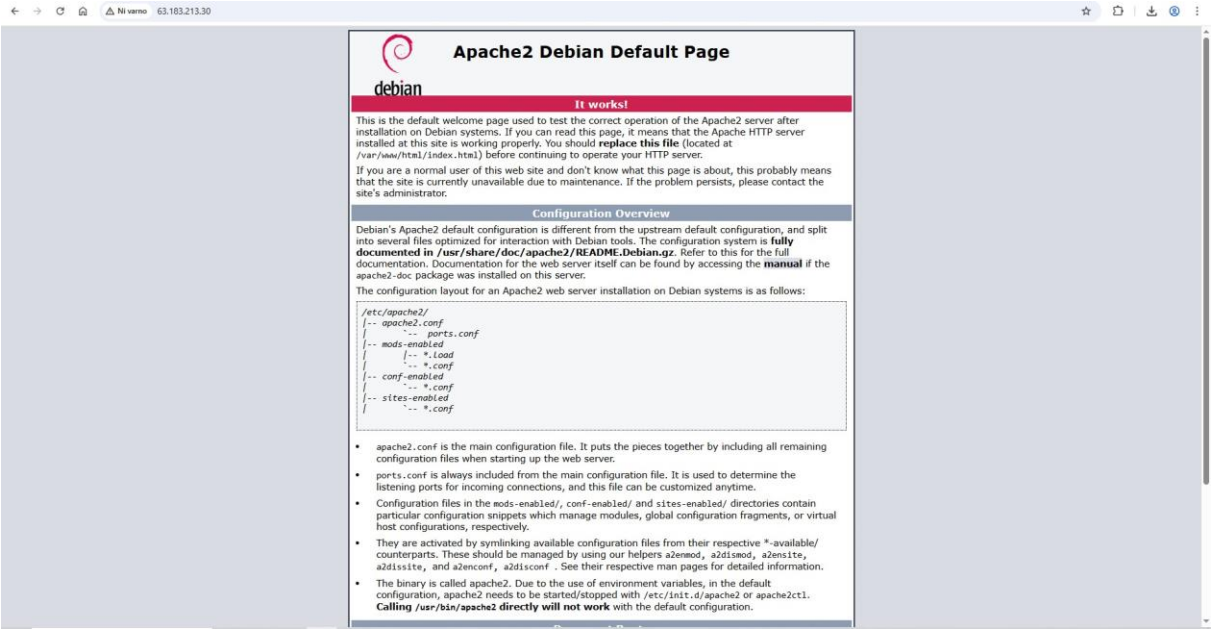


```
admin@ip-192-168-0-11:~$ sudo nano /var/www/html/vstavi.php
admin@ip-192-168-0-11:~$ sudo nano /var/www/html/izpis.php
admin@ip-192-168-0-11:~$ sudo nano /var/www/html/index.html
  GNU nano 8.4
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <title>Insert Item</title>
</head>
<body>

    <h2>Enter shopping list data</h2>

    <form action="vstavi.php" method="POST">
        <label for="element">Item Name (Element):</label><br>
        <input type="text" id="element" name="element" required><br><br>

        <label for="kolicina">Quantity (Kolicina):</label><br>
        <input type="text" id="kolicina" name="kolicina" required><br><br>

        <input type="submit" value="Save">
    </form>

</body>
</html>
```

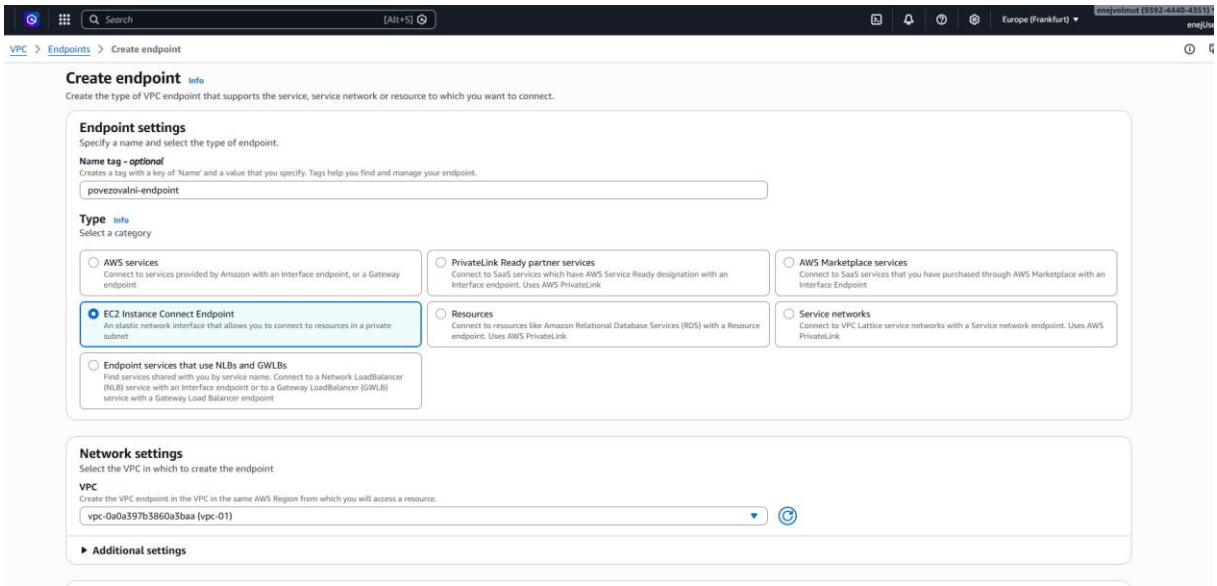
Search
[Alt+S]
Europe (Frankfurt)
enejUser
VPC > Endpoints > Create endpoint
Create endpoint Info
Create the type of VPC endpoint that supports the service, service network or resource to which you want to connect.
Endpoint settings
Specify a name and select the type of endpoint.
Name tag - optional
Creates a tag with a key of 'Name' and a value that you specify. Tags help you find and manage your endpoint.
povezovalni-endpoint
Type Info
Select a category
AWS services
Connect to services provided by Amazon with an Interface endpoint, or a Gateway endpoint
PrivateLink Ready partner services
Connect to SaaS services which have AWS Service Ready designation with an Interface endpoint. Uses AWS PrivateLink
AWS Marketplace services
Connect to SaaS services that you have purchased through AWS Marketplace with an Interface Endpoint
EC2 Instance Connect Endpoint
An elastic network interface that allows you to connect to resources in a private subnet
Resources
Connect to resources like Amazon Relational Database Services (RDS) with a Resource endpoint. Uses AWS PrivateLink
Service networks
Connect to VPC Lattice service networks with a Service network endpoint. Uses AWS PrivateLink
Endpoint services that use NLBs and GWLBs
Find services shared with you by service name. Connect to a Network LoadBalancer (NLB) service with an Interface endpoint or to a Gateway LoadBalancer (GWLB) service with a Gateway Load Balancer endpoint
Network settings
Select the VPC in which to create the endpoint
VPC
Create the VPC endpoint in the VPC in the same AWS Region from which you will access a resource.
vpc-0a0a397b3860a3baa (vpc-01)
Additional settings

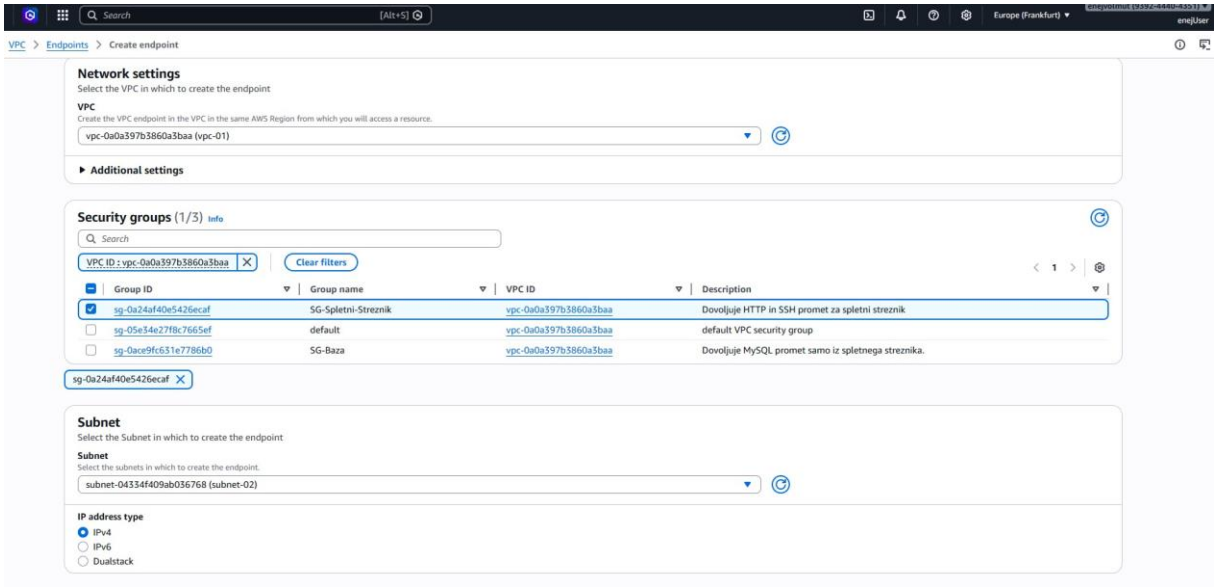
Search
[Alt+S]
Europe (Frankfurt)
enejUser
VPC > Endpoints > Create endpoint
Network settings
Select the VPC in which to create the endpoint
VPC
Create the VPC endpoint in the VPC in the same AWS Region from which you will access a resource.
vpc-0a0a397b3860a3baa (vpc-01)
Additional settings
Security groups (1/3) Info
Search
VPC ID : vpc-0a0a397b3860a3baa
Clear filters
Group ID
Group name
VPC ID
Description
sg-0a24af40e5426ecaf
SG-Spletni-Streznik
vpc-0a0a397b3860a3baa
Dovoljuje HTTP in SSH promet za spletni streznik
sg-05e34e27f8c7665ef
default
vpc-0a0a397b3860a3baa
default VPC security group
sg-0ace9fc631e7786b0
SG-Baza
vpc-0a0a397b3860a3baa
Dovoljuje MySQL promet samo iz spletnega streznika.
sg-0a24af40e5426ecaf
Subnet
Select the Subnet in which to create the endpoint
Subnet
Select the subnets in which to create the endpoint.
subnet-04334f409ab036768 (subnet-02)
IP address type
IPv4
IPv6
Dualstack

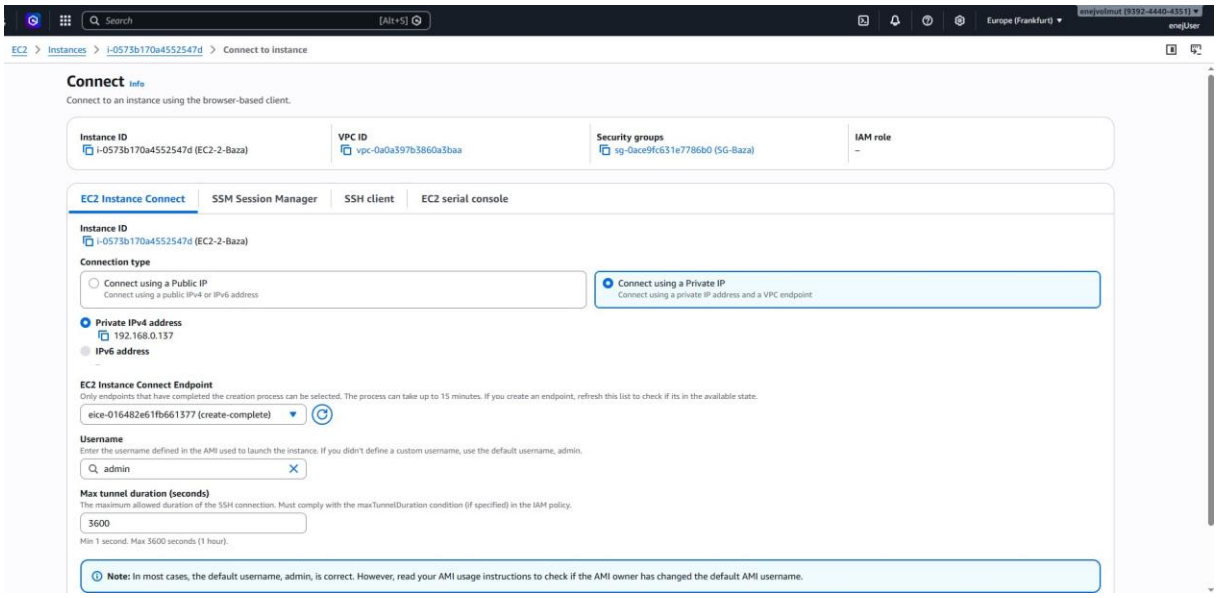
Search
[Alt+S]
Europe (Frankfurt)
enejUser
EC2 > Instances > i-0573b170a4552547d > Connect to instance
Connect Info
Connect to an instance using the browser-based client.
Instance ID
i-0573b170a4552547d (EC2-2-Baza)
VPC ID
vpc-0a0a397b3860a3baa
Security groups
sg-0ace9fc631e7786b0 (SG-Baza)
IAM role
-
EC2 Instance Connect
SSM Session Manager
SSH client
EC2 serial console
Instance ID
i-0573b170a4552547d (EC2-2-Baza)
Connection type
Connect using a Public IP
Connect using a public IPv4 or IPv6 address
Connect using a Private IP
Connect using a private IP address and a VPC endpoint
Private IPv4 address
192.168.0.137
IPv6 address
EC2 Instance Connect Endpoint
Only endpoints that have completed the creation process can be selected. The process can take up to 15 minutes. If you create an endpoint, refresh this list to check if its in the available state.
eice-016482e61fb661377 (create-complete)
Username
Enter the username defined in the AMI used to launch the instance. If you didn't define a custom username, use the default username, admin.
admin
Max tunnel duration (seconds)
The maximum allowed duration of the SSH connection. Must comply with the maxTunnelDuration condition (if specified) in the IAM policy.
3600
Min 1 second. Max 3600 seconds (1 hour).
Note: In most cases, the default username, admin, is correct. However, read your AMI usage instructions to check if the AMI owner has changed the default AMI username.

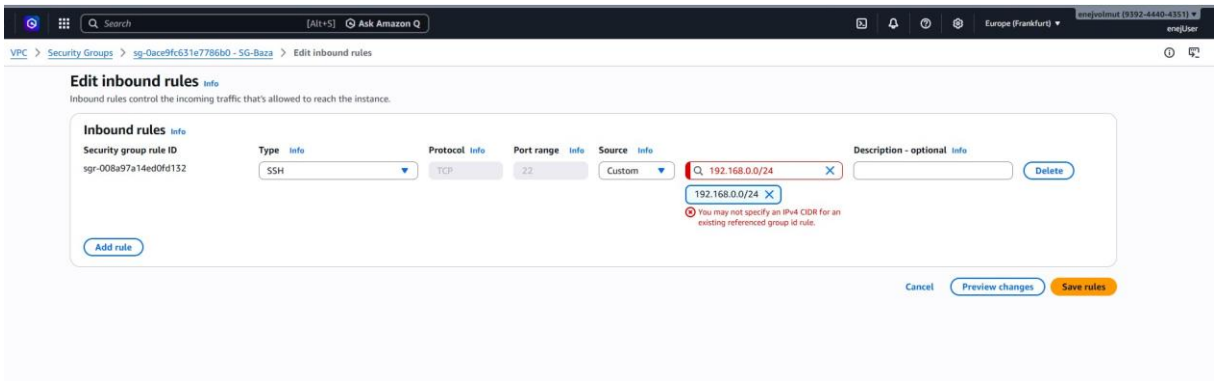
Search
[Alt+S]
Ask Amazon Q
Europe (Frankfurt)
enejUser
VPC > Security Groups > sg-0ace9fc631e7786b0 - SG-Baza > Edit inbound rules
Edit inbound rules Info
Inbound rules control the incoming traffic that's allowed to reach the instance.
Inbound rules Info
Security group rule ID
Type Info
Protocol Info
Port range Info
Source Info
Description - optional Info
sgr-008a97a14ed0fd132
SSH
TCP
22
Custom
192.168.0.0/24
192.168.0.0/24
You may not specify an IPv4 CIDR for an existing referenced group id rule.
Delete
Add rule
Cancel
Preview changes
Save rules

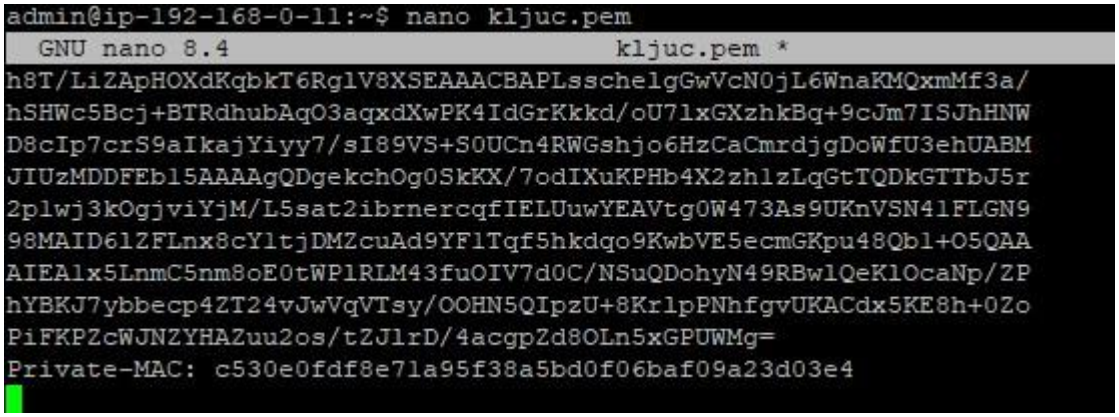
admin@ip-192-168-0-11:~$ nano kljuc.pem
GNU nano 8.4
kljuc.pem *
h8T/LiZApHOXdKqbkT6RglV8XSEAAACBAPLsschelgGwVcN0jL6WnaKMQxmMf3a/
hSHWc5Bcj+BTRdhubAqO3aqxdXwPK4IdGrKkkd/oU7lxGXzhkBq+9cJm7ISJhHNW
D8cIp7crS9aIkajYiyy7/sI89VS+S0UCn4RWGshjo6HzCaCmrdjgDoWfU3ehUABM
JIUzMDDFEb15AAAAgQDgekchOg0SkKX/7odIXuKPHb4X2zhlzLqGtTQDkGTTbJ5r
2plwj3kOgjviYjM/L5sat2ibrnercqfIELUuwYEAVtg0W473As9UKnVSN41FLGN9
98MAID61ZFLnx8cYltjDMZcuAd9YFlTqf5hkdqo9KwbVE5ecmGKpu48Qbl+O5QAA
AIEAlx5LnmC5nm8oE0tWPlRLM43fuOIV7d0C/NSuQDohyN49RBwlQeKlOcaNp/ZP
hYBKJ7ybbecp4ZT24vJwVqVTsy/OOHN5QIpzU+8KrlpPNhfgvUKACdx5KE8h+0Zo
PiFKPZcWJNZYHAZuu2os/tZJlrD/4acgpZd8OLn5xGPUWMg=
Private-MAC: c530e0fdf8e71a95f38a5bd0f06baf09a23d03e4

```
admin@ip-192-168-0-11:~$ rm -f alma2026dn.pem
admin@ip-192-168-0-11:~$ nano alma2026dn.pem
admin@ip-192-168-0-11:~$ chmod 400 alma2026dn.pem
admin@ip-192-168-0-11:~$ ssh -i alma2026dn.pem admin@192.168.0.137
Linux ip-192-168-0-137 6.12.74+deb13+1-cloud-amd64 #1 SMP PREEMPT_DYNAMIC Debian 6.12.74-2 (2026-03-08) x86_64

The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
admin@ip-192-168-0-137:~$
```

admin@ip-192-168-0-137: ~

```
Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
admin@ip-192-168-0-137:~$ sudo apt update
Get:1 file:/etc/apt/mirrors/debian.list Mirrorlist [38 B]
Get:2 file:/etc/apt/mirrors/debian-security.list Mirrorlist [47 B]
0% [Connecting to cdn-aws.deb.debian.org (2600:9000:28eb:7a00:c:a756:bac0:93a1)]        14 B
0% [Connecting to cdn-aws.deb.debian.org (2600:9000:28eb:7a00:c:a756:bac0:93a1)]        14 B
Ign:3 https://cdn-aws.deb.debian.org/debian trixie InRelease
Ign:4 https://cdn-aws.deb.debian.org/debian trixie-updates InRelease
Ign:5 https://cdn-aws.deb.debian.org/debian trixie-backports InRelease
Ign:6 https://cdn-aws.deb.debian.org/debian-security trixie-security InRelease
Ign:6 https://cdn-aws.deb.debian.org/debian-security trixie-security InRelease
Ign:5 https://cdn-aws.deb.debian.org/debian trixie-backports InRelease
Ign:4 https://cdn-aws.deb.debian.org/debian trixie-updates InRelease
Ign:3 https://cdn-aws.deb.debian.org/debian trixie InRelease
Ign:3 https://cdn-aws.deb.debian.org/debian trixie InRelease
Ign:4 https://cdn-aws.deb.debian.org/debian trixie-updates InRelease
Ign:5 https://cdn-aws.deb.debian.org/debian trixie-backports InRelease
Ign:6 https://cdn-aws.deb.debian.org/debian-security trixie-security InRelease
Err:6 https://cdn-aws.deb.debian.org/debian-security trixie-security InRelease
  Cannot initiate the connection to cdn-aws.deb.debian.org:443 (2600:9000:28eb:d800:c:a756:bac
0:93a1). - connect (101: Network is unreachable) Cannot initiate the connection to cdn-aws.deb
.debian.org:443 (2600:9000:28eb:9a00:c:a756:bac0:93a1). - connect (101: Network is unreachable
) Cannot initiate the connection to cdn-aws.deb.debian.org:443 (2600:9000:28eb:5600:c:a756:bac
0:93a1). - connect (101: Network is unreachable) Cannot initiate the connection to cdn-aws.deb
.debian.org:443 (2600:9000:28eb:8200:c:a756:bac0:93a1). - connect (101: Network is unreachable
) Cannot initiate the connection to cdn-aws.deb.debian.org:443 (2600:9000:28eb:6a00:c:a756:bac
0:93a1). - connect (101: Network is unreachable) Cannot initiate the connection to cdn-aws.deb
.debian.org:443 (2600:9000:28eb:6e00:c:a756:bac0:93a1). - connect (101: Network is unreachable
) Cannot initiate the connection to cdn-aws.deb.debian.org:443 (2600:9000:28eb:2200:c:a756:bac
0:93a1). - connect (101: Network is unreachable) Cannot initiate the connection to cdn-aws.deb
.debian.org:443 (2600:9000:28eb:7a00:c:a756:bac0:93a1). - connect (101: Network is unreachable
)
Err:5 https://cdn-aws.deb.debian.org/debian trixie-backports InRelease
  Cannot initiate the connection to cdn-aws.deb.debian.org:443 (2600:9000:28eb:d800:c:a756:bac
0:93a1). - connect (101: Network is unreachable) Cannot initiate the connection to cdn-aws.deb
.debian.org:443 (2600:9000:28eb:9a00:c:a756:bac0:93a1). - connect (101: Network is unreachable
) Cannot initiate the connection to cdn-aws.deb.debian.org:443 (2600:9000:28eb:5600:c:a756:bac
0:93a1). - connect (101: Network is unreachable) Cannot initiate the connection to cdn-aws.deb
.debian.org:443 (2600:9000:28eb:8200:c:a756:bac0:93a1). - connect (101: Network is unreachable
) Cannot initiate the connection to cdn-aws.deb.debian.org:443 (2600:9000:28eb:6a00:c:a756:bac
0:93a1). - connect (101: Network is unreachable) Cannot initiate the connection to cdn-aws.deb
.debian.org:443 (2600:9000:28eb:6e00:c:a756:bac0:93a1). - connect (101: Network is unreachable
) Cannot initiate the connection to cdn-aws.deb.debian.org:443 (2600:9000:28eb:2200:c:a756:bac
0:93a1). - connect (101: Network is unreachable) Cannot initiate the connection to cdn-aws.deb
.debian.org:443 (2600:9000:28eb:7a00:c:a756:bac0:93a1). - connect (101: Network is unreachable
)
Err:4 https://cdn-aws.deb.debian.org/debian trixie-updates InRelease
  Cannot initiate the connection to cdn-aws.deb.debian.org:443 (2600:9000:28eb:d800:c:a756:bac
0:93a1). - connect (101: Network is unreachable) Cannot initiate the connection to cdn-aws.deb
```

admin@ip-192-168-0-137: ~

```
11 packages can be upgraded. Run 'apt list --upgradable' to see them.
admin@ip-192-168-0-11:~$ sudo apt-get download mariadb-server
Get:1 file:/etc/apt/mirrors/debian.list Mirrorlist [38 B]
Get:2 https://cdn-aws.deb.debian.org/debian trixie/main amd64 mariadb-server amd
64 1:11.8.6-0+deb13u1 [3907 kB]
Fetched 3907 kB in 0s (45.7 MB/s)
W: Download is performed unsandboxed as root as file '/home/admin/mariadb-server
_1%3a11.8.6-0+deb13u1_amd64.deb' couldn't be accessed by user '_apt'. - pkgAcqui
re::Run (13: Permission denied)
admin@ip-192-168-0-11:~$ scp -i alma2026dn.pem mariadb-server*.deb admin@192.168.0.13
7:/home/admin/
mariadb-server_1%3a11.8.6-0+deb13u1_amd64.deb      100% 3815KB  33.3MB/s   00:00
admin@ip-192-168-0-11:~$ ssh -i alma2026dn.pem admin@192.168.0.137
Linux ip-192-168-0-137 6.12.74+deb13+1-cloud-amd64 #1 SMP PREEMPT_DYNAMIC Debian 6.12
.74-2 (2026-03-08) x86_64

The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
Last login: Thu Apr 16 00:06:23 2026 from 192.168.0.11
admin@ip-192-168-0-137:~$
```

admin@ip-192-168-0-137: ~/koncni_paketi

```
m.
Installing new config file as you requested.

Configuration file '/etc/logcheck/ignore.d.server/mariadb-server', does not exist on system.
Installing new config file as you requested.

Configuration file '/etc/logcheck/ignore.d.workstation/mariadb-server', does not exist on sy
stem.
Installing new config file as you requested.

Configuration file '/etc/logrotate.d/mariadb', does not exist on system.
Installing new config file as you requested.

Configuration file '/etc/mysql/debian-start', does not exist on system.
Installing new config file as you requested.

Configuration file '/etc/mysql/mariadb.conf.d/50-mysqld_safe.cnf', does not exist on system.
Installing new config file as you requested.

Configuration file '/etc/mysql/mariadb.conf.d/50-server.cnf', does not exist on system.
Installing new config file as you requested.

Configuration file '/etc/security/user_map.conf', does not exist on system.
Installing new config file as you requested.
Created symlink '/etc/systemd/system/multi-user.target.wants/mariadb.service' → '/usr/lib/sy
stemd/system/mariadb.service'.
Processing triggers for man-db (2.13.1-1) ...
Processing triggers for libc-bin (2.41-12+deb13u2) ...
admin@ip-192-168-0-137:~/koncni_paketi$ sudo dpkg --configure -a
admin@ip-192-168-0-137:~/koncni_paketi$ sudo systemctl status mariadb
● mariadb.service - MariaDB 11.8.6 database server
     Loaded: loaded (/usr/lib/systemd/system/mariadb.service; enabled; preset: enabled)
     Active: active (running) since Thu 2026-04-16 01:15:22 UTC; 41s ago
 Invocation: cab7ec98fd5c406f96571bd2aec90c08
       Docs: man:mariadbd(8)
             https://mariadb.com/kb/en/library/systemd/
    Process: 4845 ExecStartPre=/bin/sh -c [ ! -e /usr/bin/galera_recovery ] && VAR= ||   VA>
    Process: 4880 ExecStartPost=/bin/rm -f /run/mysqld/wsrep-start-position /run/mysqld/wsr>
    Process: 4882 ExecStartPost=/etc/mysql/debian-start (code=exited, status=0/SUCCESS)
   Main PID: 4868 (mariadbd)
     Status: "Taking your SQL requests now..."
      Tasks: 13 (limit: 7245)
     Memory: 123.1M (peak: 127.7M)
        CPU: 1.591s
     CGroup: /system.slice/mariadb.service
             └─4868 /usr/sbin/mariadbd

Apr 16 01:15:22 ip-192-168-0-137 mariadbd[4868]: 2026-04-16  1:15:22 0 [Note] InnoDB: Loadi>
Apr 16 01:15:22 ip-192-168-0-137 mariadbd[4868]: 2026-04-16  1:15:22 0 [Note] InnoDB: Buffe>
Apr 16 01:15:22 ip-192-168-0-137 mariadbd[4868]: 2026-04-16  1:15:22 0 [Note] Server socket>
Apr 16 01:15:22 ip-192-168-0-137 mariadbd[4868]: 2026-04-16  1:15:22 0 [Note] mariadbd: Eve>
Apr 16 01:15:22 ip-192-168-0-137 mariadbd[4868]: 2026-04-16  1:15:22 0 [Note] /usr/sbin/mar>
Apr 16 01:15:22 ip-192-168-0-137 mariadbd[4868]: Version: '11.8.6-MariaDB-0+deb13u1 from De>
Apr 16 01:15:22 ip-192-168-0-137 systemd[1]: Started mariadb.service - MariaDB 11.8.6 datab>
Apr 16 01:15:22 ip-192-168-0-137 /etc/mysql/debian-start[4884]: Upgrading MariaDB tables if>
Apr 16 01:15:22 ip-192-168-0-137 /etc/mysql/debian-start[4897]: Checking for insecure root >
Apr 16 01:15:22 ip-192-168-0-137 /etc/mysql/debian-start[4901]: Triggering myisam-recover f>
lines 1-27/27 (END)
```

admin@ip-192-168-0-137: ~/koncni_paketi

```
~
~
~
● mariadb.service - MariaDB 11.8.6 database server
     Loaded: loaded (/usr/lib/systemd/system/mariadb.service; enabled; preset: enabled)
     Active: active (running) since Thu 2026-04-16 01:15:22 UTC; 41s ago
 Invocation: cab7ec98fd5c406f96571bd2aec90c08
       Docs: man:mariadbd(8)
             https://mariadb.com/kb/en/library/systemd/
    Process: 4845 ExecStartPre=/bin/sh -c [ ! -e /usr/bin/galera_recovery ] && VAR= ||   VAR
    Process: 4880 ExecStartPost=/bin/rm -f /run/mysqld/wsrep-start-position /run/mysqld/wsre
    Process: 4882 ExecStartPost=/etc/mysql/debian-start (code=exited, status=0/SUCCESS)
   Main PID: 4868 (mariadbd)
     Status: "Taking your SQL requests now..."
      Tasks: 13 (limit: 7245)
     Memory: 123.1M (peak: 127.7M)
        CPU: 1.591s
     CGroup: /system.slice/mariadb.service
             └─4868 /usr/sbin/mariadbd

Apr 16 01:15:22 ip-192-168-0-137 mariadbd[4868]: 2026-04-16  1:15:22 0 [Note] InnoDB: Loadin
Apr 16 01:15:22 ip-192-168-0-137 mariadbd[4868]: 2026-04-16  1:15:22 0 [Note] InnoDB: Buffer
Apr 16 01:15:22 ip-192-168-0-137 mariadbd[4868]: 2026-04-16  1:15:22 0 [Note] Server socket
Apr 16 01:15:22 ip-192-168-0-137 mariadbd[4868]: 2026-04-16  1:15:22 0 [Note] mariadbd: Even
Apr 16 01:15:22 ip-192-168-0-137 mariadbd[4868]: 2026-04-16  1:15:22 0 [Note] /usr/sbin/mari
Apr 16 01:15:22 ip-192-168-0-137 mariadbd[4868]: Version: '11.8.6-MariaDB-0+deb13u1 from Deb
Apr 16 01:15:22 ip-192-168-0-137 systemd[1]: Started mariadb.service - MariaDB 11.8.6 databa
Apr 16 01:15:22 ip-192-168-0-137 /etc/mysql/debian-start[4884]: Upgrading MariaDB tables if
Apr 16 01:15:22 ip-192-168-0-137 /etc/mysql/debian-start[4897]: Checking for insecure root a
Apr 16 01:15:22 ip-192-168-0-137 /etc/mysql/debian-start[4901]: Triggering myisam-recover fo
~
admin@ip-192-168-0-137:~/koncni_paketi$ sudo mariadb
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 31
Server version: 11.8.6-MariaDB-0+deb13u1 from Debian -- Please help get to 10k stars at http

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]>
```

```
admin@ip-192-168-0-137:~$ systemctl status
● ip-192-168-0-137
    State: running
    Units: 304 loaded (incl. loaded aliases)
     Jobs: 0 queued
   Failed: 0 units
    Since: Wed 2026-04-15 18:19:29 UTC; 19h ago
  systemd: 257.9-1~deb13u1
  Tainted: unmerged-bin
   CGroup: /
           ├─init.scope
           │ └─1 /sbin/init
           ├─system.slice
           │ ├─dbus.service
           │ │ └─694 /usr/bin/dbus-daemon --system --address=systemd: --nofork >
           │ ├─mariadb.service
           │ │ └─4868 /usr/sbin/mariadbd
           │ ├─polkit.service
           │ │ └─760 /usr/lib/polkit-1/polkitd --no-debug --log-level=notice
           │ ├─ssh.service
           │ │ └─717 "sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups"
           │ ├─system-getty.slice
           │ │ └─getty@tty1.service
           │ │   └─727 /sbin/agetty -o "-- \\u" --noreset --noclear - linux
admin@ip-192-168-0-137:~$ apt list --installed | grep mariadb-server

WARNING: apt does not have a stable CLI interface. Use with caution in scripts.

mariadb-server-core/now 1:11.8.6-0+deb13u1 amd64 [installed,local]
mariadb-server/now 1:11.8.6-0+deb13u1 amd64 [installed,local]
admin@ip-192-168-0-137:~$ dpkg -l mariadb-server
Desired=Unknown/Install/Remove/Purge/Hold
| Status=Not/Inst/Conf-files/Unpacked/halF-conf/Half-inst/trig-aWait/Trig-pend
|/ Err?=(none)/Reinst-required (Status,Err: uppercase=bad)
||/ Name           Version            Architecture Description
+++-==============-==================-============-===========================>
ii  mariadb-server 1:11.8.6-0+deb13u1 amd64        MariaDB database server bina>
admin@ip-192-168-0-137:~$ sudo mariadb
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 32
Server version: 11.8.6-MariaDB-0+deb13u1 from Debian -- Please help get to 10k s
tars at https://github.com/MariaDB/Server

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]> ALTER USER 'root'@'localhost' IDENTIFIED BY 'enej';
Query OK, 0 rows affected (0.001 sec)

MariaDB [(none)]> FLUSH PRIVILEGES;
Query OK, 0 rows affected (0.000 sec)

MariaDB [(none)]>
```

```
MariaDB [(none)]> CREATE USER 'enej'@'%' IDENTIFIED BY 'enej';
Query OK, 0 rows affected (0.001 sec)

MariaDB [(none)]> GRANT ALL PRIVILEGES ON *.* TO 'enej'@'%' WITH GRANT OPTION;
Query OK, 0 rows affected (0.001 sec)

MariaDB [(none)]> FLUSH PRIVILEGES;
Query OK, 0 rows affected (0.001 sec)

MariaDB [(none)]> CREATE DATABASE nakup;
Query OK, 1 row affected (0.000 sec)

MariaDB [(none)]> USE nakup;
Database changed
MariaDB [nakup]> CREATE TABLE nakup (
    ->     id INT AUTO_INCREMENT PRIMARY KEY,
    ->     element VARCHAR(100),
    ->     kolicina VARCHAR(50)
    -> );
Query OK, 0 rows affected (0.013 sec)

MariaDB [nakup]> INSERT INTO nakup (element, kolicina) VALUES ('Kruh', '1 kos'),
 ('Mleko', '2 litra');
Query OK, 2 rows affected (0.002 sec)
Records: 2  Duplicates: 0  Warnings: 0

MariaDB [nakup]> SELECT * FROM nakup;
+----+---------+----------+
| id | element | kolicina |
+----+---------+----------+
|  1 | Kruh    | 1 kos    |
|  2 | Mleko   | 2 litra  |
+----+---------+----------+
2 rows in set (0.000 sec)

MariaDB [nakup]>
```

admin@ip-192-168-0-137: ~

```
Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
Last login: Thu Apr 16 14:57:41 2026 from 192.168.0.11
admin@ip-192-168-0-137:~$ sudo nano /etc/mysql/mariadb.conf.d/50-server.cnf
admin@ip-192-168-0-137:~$ sudo nano /etc/mysql/mariadb.conf.d/50-server.cnf
  GNU nano 8.4          /etc/mysql/mariadb.conf.d/50-server.cnf

# Broken reverse DNS slows down connections considerably and name resolve is
# safe to skip if there are no "host by domain name" access grants
#skip-name-resolve

# Instead of skip-networking the default is now to listen only on
# localhost which is more compatible and is not less secure.
bind-address            = 0.0.0.0

#
# * Fine Tuning
#

#key_buffer_size        = 128M
#max_allowed_packet     = 1G
#thread_stack           = 192K
#thread_cache_size      = 8
# This replaces the startup script and checks MyISAM tables if needed
# the first time they are touched
#myisam_recover_options = BACKUP
#max_connections        = 100
#table_cache            = 64

#
# * Logging and Replication
#

# Note: The configured log file or its directory need to be created
# and be writable by the mysql user, e.g.:
# $ sudo mkdir -m 2750 /var/log/mysql
# $ sudo chown mysql /var/log/mysql

# Both location gets rotated by the cronjob.
```

Ni varno 63.183.213.30

Nakupovalni seznam

Element:
Moka

Količina:
1kg

Save

Ni varno 63.183.213.30/vstavi.php

Data saved successfully! Poglej seznam

Ni varno 63.183.213.30/izpis.php

id: 1 - Element: Kruh - Količina: 1 kos
id: 2 - Element: Mleko - Količina: 2 litra
id: 3 - Element: Moka - Količina: 1kg

Ni varno 63.183.213.30/izpis.php

id: 1 - Element: Kruh - Količina: 1 kos
id: 2 - Element: Mleko - Količina: 2 litra
id: 3 - Element: Moka - Količina: 1kg
id: 4 - Element: Jajca - Količina: 3 škatle

admin@ip-192-168-0-137: ~

```
permitted by applicable law.
Last login: Thu Apr 16 15:07:55 2026 from 192.168.0.11
admin@ip-192-168-0-137:~$ mariadb -u enej -p
Enter password:
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 9
Server version: 11.8.6-MariaDB-0+deb13u1 from Debian -- Please help get to 10k st
ars at https://github.com/MariaDB/Server

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]> USE nakup;
Reading table information for completion of table and column names
You can turn off this feature to get a quicker startup with -A

Database changed
MariaDB [nakup]> SELECT * FROM nakup;
+----+---------+----------+
| id | element | kolicina |
+----+---------+----------+
|  1 | Kruh    | 1 kos    |
|  2 | Mleko   | 2 litra  |
|  3 | Moka    | 1kg      |
+----+---------+----------+
3 rows in set (0.000 sec)

MariaDB [nakup]> SELECT * FROM nakup;
+----+---------+-----------+
| id | element | kolicina  |
+----+---------+-----------+
|  1 | Kruh    | 1 kos     |
|  2 | Mleko   | 2 litra   |
|  3 | Moka    | 1kg       |
|  4 | Jajca   | 3 škatle  |
+----+---------+-----------+
4 rows in set (0.000 sec)

MariaDB [nakup]>
```

```
admin@ip-192-168-0-11:~$ cd ~/vse_za_db
admin@ip-192-168-0-11:~/vse_za_db$ python3 -m http.server 8000
Serving HTTP on 0.0.0.0 port 8000 (http://0.0.0.0:8000/) ...
```

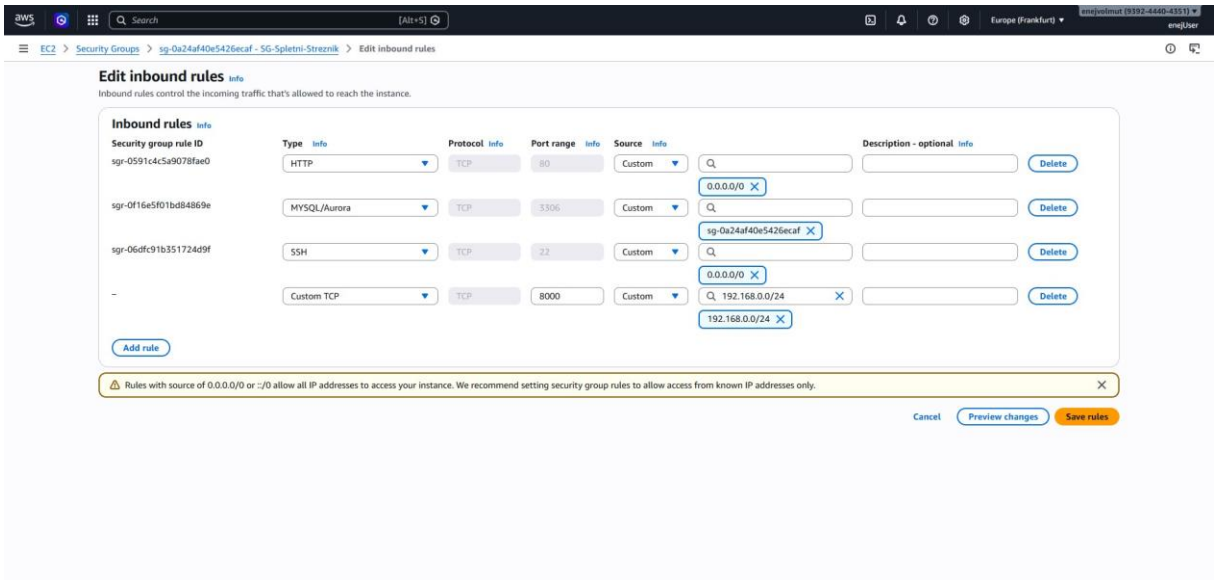

admin@ip-192-168-0-11: ~/paketi_za_prenos

```
admin@ip-192-168-0-11:~/vse_za_db$ cd ~/vse_za_db
admin@ip-192-168-0-11:~/vse_za_db$ sudo apt-get download perl perl-base perl-mod
ules rsync gawk lsof psmisc libaio1
E: Can't select candidate version from package perl-modules as it has no candida
te
E: Unable to locate package libaio1
admin@ip-192-168-0-11:~/vse_za_db$ sudo apt-get download mariadb-server mariadb-
client galera-4 mysql-common mariadb-common libmariadb3
Get:1 file:/etc/apt/mirrors/debian.list Mirrorlist [38 B]
Get:2 https://cdn-aws.deb.debian.org/debian trixie/main amd64 galera-4 amd64 26.
4.23-0+deb13u1 [916 kB]
Get:3 https://cdn-aws.deb.debian.org/debian trixie/main amd64 libmariadb3 amd64
1:11.8.6-0+deb13u1 [187 kB]
Get:4 https://cdn-aws.deb.debian.org/debian trixie/main amd64 mariadb-client amd
64 1:11.8.6-0+deb13u1 [3164 kB]
Get:5 https://cdn-aws.deb.debian.org/debian trixie/main amd64 mariadb-common all
 1:11.8.6-0+deb13u1 [29.5 kB]
Get:6 https://cdn-aws.deb.debian.org/debian trixie/main amd64 mariadb-server amd
64 1:11.8.6-0+deb13u1 [3907 kB]
Get:7 https://cdn-aws.deb.debian.org/debian trixie/main amd64 mysql-common all 5
.8+1.1.1 [6784 B]
Fetched 8209 kB in 0s (37.9 MB/s)
W: Download is performed unsandboxed as root as file '/home/admin/vse_za_db/gale
ra-4_26.4.23-0+deb13u1_amd64.deb' couldn't be accessed by user '_apt'. - pkgAcqu
ire::Run (13: Permission denied)
admin@ip-192-168-0-11:~/vse_za_db$ sudo apt-get download libdbi-perl libhtml-tem
plate-perl
Get:1 file:/etc/apt/mirrors/debian.list Mirrorlist [38 B]
Get:2 https://cdn-aws.deb.debian.org/debian trixie/main amd64 libdbi-perl amd64
1.647-1 [861 kB]
Get:3 https://cdn-aws.deb.debian.org/debian trixie/main amd64 libhtml-template-p
erl all 2.97-2 [66.5 kB]
Fetched 928 kB in 0s (12.6 MB/s)
W: Download is performed unsandboxed as root as file '/home/admin/vse_za_db/libd
bi-perl_1.647-1_amd64.deb' couldn't be accessed by user '_apt'. - pkgAcquire::Ru
n (13: Permission denied)
admin@ip-192-168-0-11:~/vse_za_db$ ls -l
total 8940
-rw-r--r-- 1 root root  916072 Aug 29  2025 galera-4_26.4.23-0+deb13u1_amd64.deb
-rw-r--r-- 1 root root  861152 Feb  1  2025 libdbi-perl_1.647-1_amd64.deb
-rw-r--r-- 1 root root   66468 Jun 14  2022 libhtml-template-perl_2.97-2_all.deb
-rw-r--r-- 1 root root  186516 Mar  7 22:25 libmariadb3_1%3a11.8.6-0+deb13u1_amd
64.deb
-rw-r--r-- 1 root root 3163540 Mar  7 22:25 mariadb-client_1%3a11.8.6-0+deb13u1_
amd64.deb
-rw-r--r-- 1 root root   29544 Mar  7 22:24 mariadb-common_1%3a11.8.6-0+deb13u1_
all.deb
-rw-r--r-- 1 root root 3907004 Mar  7 22:25 mariadb-server_1%3a11.8.6-0+deb13u1_
amd64.deb
-rw-r--r-- 1 root root    6784 Jul 15  2024 mysql-common_5.8+1.1.1_all.deb
admin@ip-192-168-0-11:~/vse_za_db$ tar -cvf vsi_paketi.tar *.deb
galera-4_26.4.23-0+deb13u1_amd64.deb
libdbi-perl_1.647-1_amd64.deb
libhtml-template-perl_2.97-2_all.deb
libmariadb3_1%3a11.8.6-0+deb13u1_amd64.deb
mariadb-client_1%3a11.8.6-0+deb13u1_amd64.deb
mariadb-common_1%3a11.8.6-0+deb13u1_all.deb
mariadb-server_1%3a11.8.6-0+deb13u1_amd64.deb
mysql-common_5.8+1.1.1_all.deb
admin@ip-192-168-0-11:~/vse_za_db$ python3 -m http.server 8000
Serving HTTP on 0.0.0.0 port 8000 (http://0.0.0.0:8000/) ...
192.168.0.216 - - [16/Apr/2026 16:54:13] code 404, message File not found
192.168.0.216 - - [16/Apr/2026 16:54:13] "GET /paketi.tar HTTP/1.1" 404 -
```

admin@ip-192-168-0-11: ~/paketi_za_prenos

```
libkeyutils1_1.6.3-6_amd64.deb
libkrb5-3_1.21.3-5_amd64.deb
libkrb5support0_1.21.3-5_amd64.deb
liblsof0_4.99.4+dfsg-2_amd64.deb
liblz4-1_1.10.0-4_amd64.deb
libmariadb3_1%3a11.8.6-0+deb13u1_amd64.deb
libmd0_1.1.0-2+b1_amd64.deb
libmnl0_1.0.5-3_amd64.deb
libmpfr6_4.2.2-1_amd64.deb
libncurses6_6.5+20250216-2_amd64.deb
libncursesw6_6.5+20250216-2_amd64.deb
libnewt0.52_0.52.25-1_amd64.deb
libnuma1_2.0.19-1_amd64.deb
libpam-modules-bin_1.7.0-5_amd64.deb
libpam-modules_1.7.0-5_amd64.deb
libpam0g_1.7.0-5_amd64.deb
libpcre2-8-0_10.46-1~deb13u1_amd64.deb
libpcre2-posix3_10.46-1~deb13u1_amd64.deb
libperl5.40_5.40.1-6_amd64.deb
libpopt0_1.19+dfsg-2_amd64.deb
libproc2-0_2%3a4.0.4-9_amd64.deb
libreadline8t64_8.2-6_amd64.deb
libselinux1_3.8.1-1_amd64.deb
libsemanage-common_3.8.1-1_all.deb
libsemanage2_3.8.1-1_amd64.deb
libsepol2_3.8.1-1_amd64.deb
libsigsegv2_2.14-1+b2_amd64.deb
libslang2_2.3.3-5+b2_amd64.deb
libssl3t64_3.5.5-1~deb13u2_amd64.deb
libstdc++6_14.2.0-19_amd64.deb
libsystemd0_257.9-1~deb13u1_amd64.deb
libtextwrap1_0.1-17+b1_amd64.deb
libtinfo6_6.5+20250216-2_amd64.deb
libtirpc-common_1.3.6+ds-1_all.deb
libtirpc3t64_1.3.6+ds-1_amd64.deb
liburing2_2.9-1_amd64.deb
libwrap0_7.6.q-36_amd64.deb
libxtables12_1.8.11-2_amd64.deb
libxxhash0_0.8.3-2_amd64.deb
libzstd1_1.5.7+dfsg-1_amd64.deb
login.defs_1%3a4.17.4-2_all.deb
lsof_4.99.4+dfsg-2_amd64.deb
mariadb-client-core_1%3a11.8.6-0+deb13u1_amd64.deb
mariadb-client_1%3a11.8.6-0+deb13u1_amd64.deb
mariadb-common_1%3a11.8.6-0+deb13u1_all.deb
mariadb-server-core_1%3a11.8.6-0+deb13u1_amd64.deb
mariadb-server_1%3a11.8.6-0+deb13u1_amd64.deb
mysql-common_5.8+1.1.1_all.deb
openssl-provider-legacy_3.5.5-1~deb13u2_amd64.deb
passwd_1%3a4.17.4-2_amd64.deb
perl-base_5.40.1-6_amd64.deb
perl-modules-5.40_5.40.1-6_all.deb
perl_5.40.1-6_amd64.deb
procps_2%3a4.0.4-9_amd64.deb
psmisc_23.7-2_amd64.deb
readline-common_8.2-6_all.deb
rsync_3.4.1+ds1-5+deb13u1_amd64.deb
socat_1.8.0.3-1_amd64.deb
zlib1g_1%3a1.3.dfsg+really1.3.1-1+b1_amd64.deb
admin@ip-192-168-0-11:~/paketi_za_prenos$ python3 -m http.server 8000
Serving HTTP on 0.0.0.0 port 8000 (http://0.0.0.0:8000/) ...
192.168.0.216 - - [16/Apr/2026 17:08:38] "GET /vsi_paketi.tar HTTP/1.1" 200 -
```

admin@ip-192-168-0-216: ~/mariadb_namestitev

```
~
admin@ip-192-168-0-216:~/mariadb_namestitev$ sudo mkdir -p /run/mysqld /var/lib/
mysql
admin@ip-192-168-0-216:~/mariadb_namestitev$ sudo chown -R mysql:mysql /run/mysq
ld /var/lib/mysql
admin@ip-192-168-0-216:~/mariadb_namestitev$ sudo chmod 777 /run/mysqld
admin@ip-192-168-0-216:~/mariadb_namestitev$ sudo dpkg --configure -a
dpkg: dependency problems prevent configuration of libhtml-template-perl:
 libhtml-template-perl depends on libcgi-pm-perl | perl (<< 5.19); however:
  Package libcgi-pm-perl is not installed.
  Version of perl on system is 5.40.1-6.

dpkg: error processing package libhtml-template-perl (--configure):
 dependency problems - leaving unconfigured
Setting up mariadb-common (1:11.8.6-0+deb13u1) ...
update-alternatives: error: alternative path /etc/mysql/mariadb.cnf doesn't exis
t
dpkg: error processing package mariadb-common (--configure):
 installed mariadb-common package post-installation script subprocess returned e
rror exit status 2
dpkg: dependency problems prevent configuration of libmariadb3:amd64:
 libmariadb3:amd64 depends on mariadb-common; however:
  Package mariadb-common is not configured yet.

dpkg: error processing package libmariadb3:amd64 (--configure):
 dependency problems - leaving unconfigured
dpkg: dependency problems prevent configuration of mariadb-server:
 mariadb-server depends on mariadb-common (>= 1:11.8.6-0+deb13u1); however:
  Package mariadb-common is not configured yet.

dpkg: error processing package mariadb-server (--configure):
 dependency problems - leaving unconfigured
Errors were encountered while processing:
 libhtml-template-perl
 mariadb-common
 libmariadb3:amd64
 mariadb-server
admin@ip-192-168-0-216:~/mariadb_namestitev$ sudo -u mysql /usr/sbin/mariadbd &
[1] 5779
admin@ip-192-168-0-216:~/mariadb_namestitev$ 2026-04-16 19:00:59 0 [Note] Starti
ng MariaDB 11.8.6-MariaDB-0+deb13u1 from Debian source revision 9bfea48ce1214cc4
470f6f6f8a4e30352cef84e7 server_uid r9988MLywLtTN2J8qQhdG+tmqAE= as process 5782
2026-04-16 19:00:59 0 [Note] InnoDB: The first data file './ibdata1' did not exi
st. A new tablespace will be created!
2026-04-16 19:00:59 0 [Note] InnoDB: Compressed tables use zlib 1.3.1
2026-04-16 19:00:59 0 [Note] InnoDB: Number of transaction pools: 1
2026-04-16 19:00:59 0 [Note] InnoDB: Using crc32 + pclmulqdq instructions
2026-04-16 19:00:59 0 [Note] InnoDB: Using io_uring
2026-04-16 19:00:59 0 [Note] InnoDB: innodb_buffer_pool_size_max=128m, innodb_bu
ffer_pool_size=128m
2026-04-16 19:00:59 0 [Note] InnoDB: Completed initialization of buffer pool
2026-04-16 19:00:59 0 [Note] InnoDB: Setting file './ibdata1' size to 12.000MiB.
 Physically writing the file full; Please wait ...
2026-04-16 19:00:59 0 [Note] InnoDB: File './ibdata1' size is now 12.000MiB.
2026-04-16 19:00:59 0 [Note] InnoDB: File system buffers for log disabled (block
 size=512 bytes)
2026-04-16 19:00:59 0 [Note] InnoDB: Data file .//undo001 did not exist: new to
be created
2026-04-16 19:00:59 0 [Note] InnoDB: Setting file .//undo001 size to 10.000MiB
2026-04-16 19:00:59 0 [Note] InnoDB: Database physically writes the file full: w
ait...
2026-04-16 19:00:59 0 [Note] InnoDB: Data file .//undo002 did not exist: new to
be created
```

admin@ip-192-168-0-216: ~/mariadb_namestitev

```
2026-04-16 19:00:59 0 [Note] InnoDB: Database physically writes the file full: w
ait...
2026-04-16 19:00:59 0 [Note] InnoDB: Data file .//undo003 did not exist: new to
be created
2026-04-16 19:00:59 0 [Note] InnoDB: Setting file .//undo003 size to 10.000MiB
2026-04-16 19:00:59 0 [Note] InnoDB: Database physically writes the file full: w
ait...
2026-04-16 19:00:59 0 [Note] InnoDB: Doublewrite buffer not found: creating new
2026-04-16 19:00:59 0 [Note] InnoDB: Doublewrite buffer created
2026-04-16 19:00:59 0 [Note] InnoDB: Opened 3 undo tablespaces
2026-04-16 19:00:59 0 [Note] InnoDB: 128 rollback segments in 3 undo tablespaces
 are active.
2026-04-16 19:00:59 0 [Note] InnoDB: Setting file './ibtmp1' size to 12.000MiB.
Physically writing the file full; Please wait ...
2026-04-16 19:00:59 0 [Note] InnoDB: File './ibtmp1' size is now 12.000MiB.
2026-04-16 19:00:59 0 [Note] InnoDB: log sequence number 0; transaction id 3
2026-04-16 19:00:59 0 [Note] Plugin 'FEEDBACK' is disabled.
2026-04-16 19:00:59 0 [Note] Plugin 'wsrep-provider' is disabled.
2026-04-16 19:00:59 0 [ERROR] Could not open mysql.plugin table: "Table 'mysql.p
lugin' doesn't exist". Some plugins may be not loaded
2026-04-16 19:00:59 0 [ERROR] Can't open and lock privilege tables: Table 'mysql
.servers' doesn't exist
2026-04-16 19:01:00 0 [Note] Server socket created on IP: '0.0.0.0', port: '3306
'.
2026-04-16 19:01:00 0 [Note] Server socket created on IP: '::', port: '3306'.
2026-04-16 19:01:00 0 [ERROR] Fatal error: Can't open and lock privilege tables:
 Table 'mysql.db' doesn't exist
2026-04-16 19:01:00 0 [ERROR] Aborting
admin@ip-192-168-0-216:~/mariadb_namestitev$ sudo systemctl restart mariadb
Job for mariadb.service failed because the control process exited with error code.
See "systemctl status mariadb.service" and "journalctl -xeu mariadb.service" for details.
[1]+  Exit 1                  sudo -u mysql /usr/sbin/mariadbd
admin@ip-192-168-0-216:~/mariadb_namestitev$ sudo systemctl status mariadb
× mariadb.service - MariaDB 11.8.6 database server
     Loaded: loaded (/usr/lib/systemd/system/mariadb.service; disabled; preset:>
     Active: failed (Result: exit-code) since Thu 2026-04-16 19:01:22 UTC; 12s >
 Invocation: 07ce4b98c0d44d5aa51c71c6e9b0691d
       Docs: man:mariadbd(8)
             https://mariadb.com/kb/en/library/systemd/
    Process: 5799 ExecStartPre=/bin/sh -c [ ! -e /usr/bin/galera_recovery ] && >
    Process: 5806 ExecStart=/usr/sbin/mariadbd $MYSQLD_OPTS $_WSREP_NEW_CLUSTER>
   Main PID: 5806 (code=exited, status=1/FAILURE)
     Status: "MariaDB server is down"
   Mem peak: 120.6M
        CPU: 321ms

Apr 16 19:01:22 ip-192-168-0-216 mariadbd[5806]: 2026-04-16 19:01:22 0 [Note] I>
Apr 16 19:01:22 ip-192-168-0-216 mariadbd[5806]: 2026-04-16 19:01:22 0 [ERROR] >
Apr 16 19:01:22 ip-192-168-0-216 mariadbd[5806]: 2026-04-16 19:01:22 0 [Note] S>
Apr 16 19:01:22 ip-192-168-0-216 mariadbd[5806]: 2026-04-16 19:01:22 0 [Note] S>
Apr 16 19:01:22 ip-192-168-0-216 mariadbd[5806]: 2026-04-16 19:01:22 0 [ERROR] >
Apr 16 19:01:22 ip-192-168-0-216 mariadbd[5806]: 2026-04-16 19:01:22 0 [ERROR] >
Apr 16 19:01:22 ip-192-168-0-216 systemd[1]: mariadb.service: Main process exit>
Apr 16 19:01:22 ip-192-168-0-216 systemd[1]: mariadb.service: Failed with resul>
Apr 16 19:01:22 ip-192-168-0-216 systemd[1]: Failed to start mariadb.service - >
Apr 16 19:01:22 ip-192-168-0-216 systemd[1]: mariadb.service: Consumed 321ms CP>
admin@ip-192-168-0-216:~/mariadb_namestitev$ sudo mariadb-install-db --user=mysq
l --basedir=/usr --datadir=/var/lib/mysql
Installing MariaDB/MySQL system tables in '/var/lib/mysql' ...
OK
```

admin@ip-192-168-0-216: ~/mariadb_namestitev

```
Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]> seelct version();
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your MariaDB
server version for the right syntax to use near 'seelct version()' at line 1
MariaDB [(none)]> SELECT VERSION();
+-------------------------------------+
| VERSION()                           |
+-------------------------------------+
| 11.8.6-MariaDB-0+deb13u1 from Debian |
+-------------------------------------+
1 row in set (0.000 sec)

MariaDB [(none)]> sudo pkill -9 mariadbd
    -> ;
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your MariaDB
server version for the right syntax to use near 'sudo pkill -9 mariadbd' at line 1
MariaDB [(none)]> pkill -9 mariadbd
    -> ;
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your MariaDB
server version for the right syntax to use near 'pkill -9 mariadbd' at line 1
MariaDB [(none)]> EXIT;
Bye
admin@ip-192-168-0-216:~/mariadb_namestitev$ sudo pkill -9 mariadbd
admin@ip-192-168-0-216:~/mariadb_namestitev$ sudo pkill -9 mysqld
admin@ip-192-168-0-216:~/mariadb_namestitev$ sudo sed -i 's/^ExecStartPre=/#ExecStartPre=/' /lib/systemd/sys
tem/mariadb.service
admin@ip-192-168-0-216:~/mariadb_namestitev$ sudo systemctl daemon-reload
admin@ip-192-168-0-216:~/mariadb_namestitev$ sudo chown -R mysql:mysql /var/lib/mysql
admin@ip-192-168-0-216:~/mariadb_namestitev$ sudo chown -R mysql:mysql /run/mysqld
admin@ip-192-168-0-216:~/mariadb_namestitev$ sudo systemctl start mariadb
admin@ip-192-168-0-216:~/mariadb_namestitev$ sudo systemctl status mariadb
● mariadb.service - MariaDB 11.8.6 database server
     Loaded: loaded (/usr/lib/systemd/system/mariadb.service; enabled; preset: enabled)
     Active: active (running) since Thu 2026-04-16 19:23:39 UTC; 31s ago
 Invocation: f5da708062014b1db418d548553e8018
       Docs: man:mariadbd(8)
             https://mariadb.com/kb/en/library/systemd/
   Main PID: 6750 (mariadbd)
     Status: "Taking your SQL requests now..."
      Tasks: 15 (limit: 7245)
     Memory: 123.2M (peak: 127.9M)
        CPU: 1.822s
     CGroup: /system.slice/mariadb.service
             └─6750 /usr/sbin/mariadbd

Apr 16 19:23:38 ip-192-168-0-216 mariadbd[6750]: 2026-04-16 19:23:38 0 [Note] Crash table recovery finished.
Apr 16 19:23:38 ip-192-168-0-216 mariadbd[6750]: 2026-04-16 19:23:38 0 [Note] InnoDB: Buffer pool(s) load c>
Apr 16 19:23:39 ip-192-168-0-216 mariadbd[6750]: 2026-04-16 19:23:39 0 [Note] Server socket created on IP: >
Apr 16 19:23:39 ip-192-168-0-216 mariadbd[6750]: 2026-04-16 19:23:39 0 [Note] Server socket created on IP: >
Apr 16 19:23:39 ip-192-168-0-216 mariadbd[6750]: 2026-04-16 19:23:39 0 [Note] mariadbd: Event Scheduler: Lo>
Apr 16 19:23:39 ip-192-168-0-216 mariadbd[6750]: 2026-04-16 19:23:39 0 [Note] /usr/sbin/mariadbd: ready for>
Apr 16 19:23:39 ip-192-168-0-216 mariadbd[6750]: Version: '11.8.6-MariaDB-0+deb13u1 from Debian'  socket: '>
Apr 16 19:23:39 ip-192-168-0-216 systemd[1]: Started mariadb.service - MariaDB 11.8.6 database server.
Apr 16 19:23:39 ip-192-168-0-216 /etc/mysql/debian-start[6784]: Triggering myisam-recover for all MyISAM ta>
Apr 16 19:23:49 ip-192-168-0-216 systemd[1]: /usr/lib/systemd/system/mariadb.service:79: Unknown key 'VAR' >
lines 1-24/24 (END)
```