NEJC DOLINAR

25.03.26

CloudFlare nemorem mi ne dovoli 404 not found ko hočem si ga downloadad.

Vprašanja nimam.

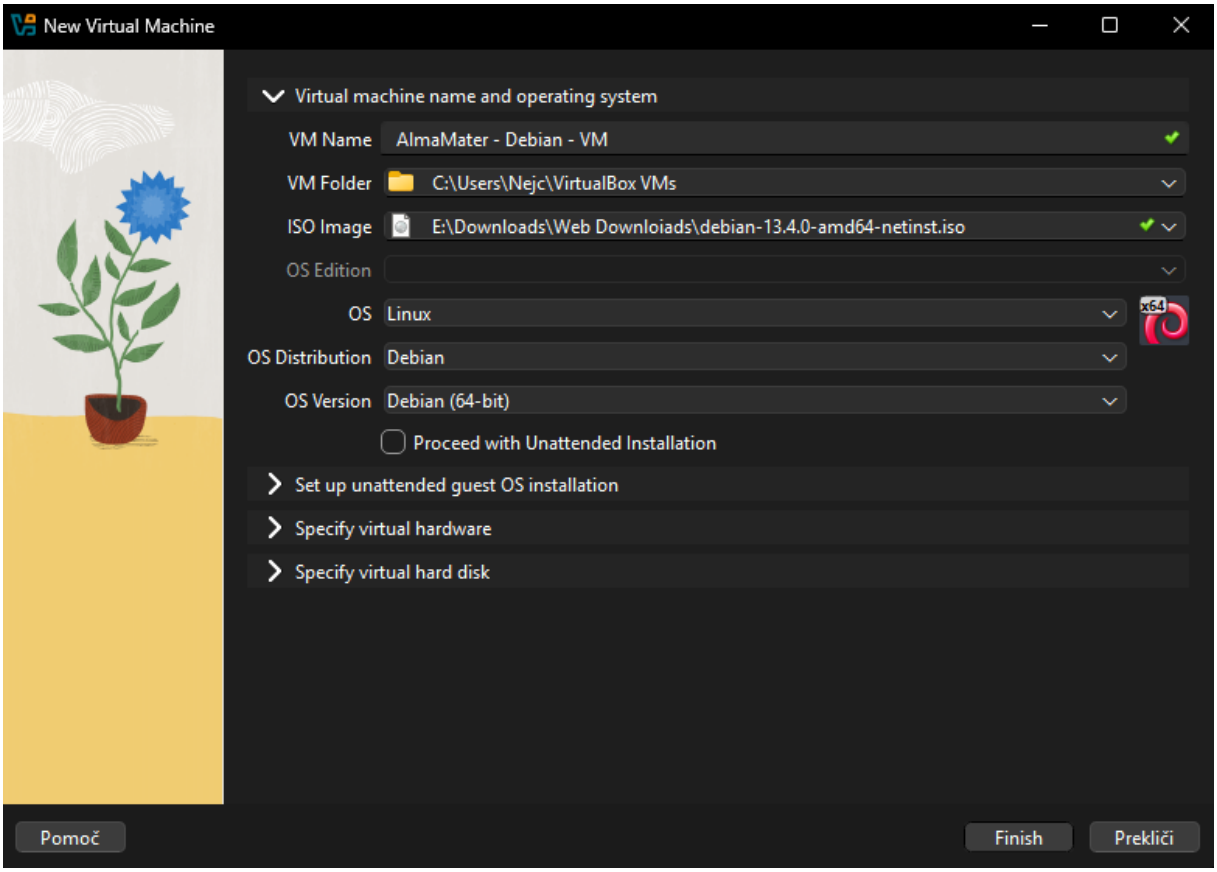

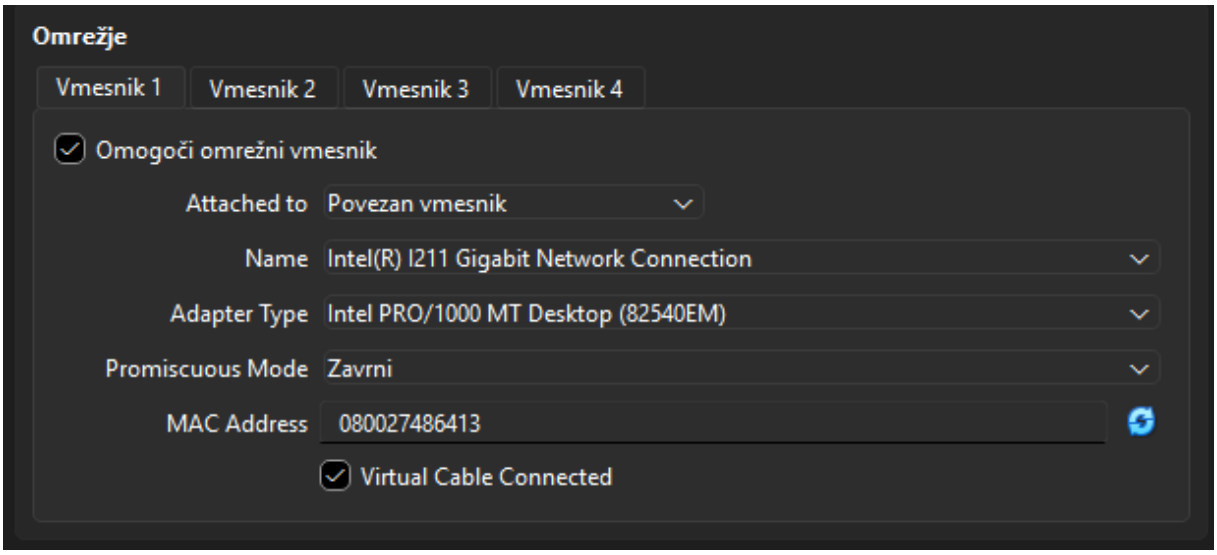

[!] Configure the network

Please enter the hostname for this system.

The hostname is a single word that identifies your system to the network. If you don't know what your hostname should be, consult your network administrator. If you are setting up your own home network, you can make something up here.

Hostname:

nejcdolinar

<Go Back> <Continue>

<Tab> moves; <Space> selects; <Enter> activates buttons

[!!] Set up users and passwords

A user account will be created for you to use instead of the root account for non-administrative activities.

Please enter the real name of this user. This information will be used for instance as default origin for emails sent by this user as well as any program which displays or uses the user's real name. Your full name is a reasonable choice.

Full name for the new user:

Nejc Dolinar

<Go Back> <Continue>

<Tab> moves; <Space> selects; <Enter> activates buttons

```
The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
nejc@nejcdolinar:~$
```

```
root@nejcdolinar:/home/nejc# systemctl start apache2
root@nejcdolinar:/home/nejc# systemctl enable apache2
Synchronizing state of apache2.service with SysV service script with /usr/lib/systemd/systemd-sysv-install.
Executing: /usr/lib/systemd/systemd-sysv-install enable apache2
root@nejcdolinar:/home/nejc# systemctl status apache2
● apache2.service - The Apache HTTP Server
     Loaded: loaded (/usr/lib/systemd/system/apache2.service; enabled; preset: enabled)
     Active: active (running) since Wed 2026-03-25 13:50:26 CET; 50s ago
 Invocation: a594f08608ec41dfbee3503951b81dd6
       Docs: https://httpd.apache.org/docs/2.4/
   Main PID: 3402 (apache2)
      Tasks: 55 (limit: 2318)
     Memory: 5M (peak: 5M)
        CPU: 53ms
     CGroup: /system.slice/apache2.service
             ├─3402 /usr/sbin/apache2 -k start
             ├─3403 /usr/sbin/apache2 -k start
             └─3408 /usr/sbin/apache2 -k start

Mar 25 13:50:26 nejcdolinar systemd[1]: Starting apache2.service - The Apache HTTP Server...
Mar 25 13:50:26 nejcdolinar systemd[1]: Started apache2.service - The Apache HTTP Server.
root@nejcdolinar:/home/nejc#
```

Apache2 Debian Default Page

debian

It works!

This is the default welcome page used to test the correct operation of the Apache2 server after installation on Debian systems. If you can read this page, it means that the Apache HTTP server installed at this site is working properly. You should **replace this file** (located at `/var/www/html/index.html`) before continuing to operate your HTTP server.

If you are a normal user of this web site and don't know what this page is about, this probably means that the site is currently unavailable due to maintenance. If the problem persists, please contact the site's administrator.

Configuration Overview

Debian's Apache2 default configuration is different from the upstream default configuration, and split into several files optimized for interaction with Debian tools. The configuration system is **fully documented in /usr/share/doc/apache2/README.Debian.gz**. Refer to this for the full documentation. Documentation for the web server itself can be found by accessing the **manual** if the `apache2-doc` package was installed on this server.

The configuration layout for an Apache2 web server installation on Debian systems is as follows:

```
/etc/apache2/
|-- apache2.conf
|       `--  ports.conf
|-- mods-enabled
|       |-- *.load
|       `-- *.conf
|-- conf-enabled
|       `-- *.conf
|-- sites-enabled
|       `-- *.conf
```

- `apache2.conf` is the main configuration file. It puts the pieces together by including all remaining configuration files when starting up the web server.
- `ports.conf` is always included from the main configuration file. It is used to determine the listening ports for incoming connections, and this file can be customized anytime.
- Configuration files in the `mods-enabled/`, `conf-enabled/` and `sites-enabled/` directories contain particular configuration snippets which manage modules, global configuration fragments, or virtual host configurations, respectively.
- They are activated by symlinking available configuration files from their respective *-available/ counterparts. These should be managed by using our helpers `a2enmod`, `a2dismod`, `a2ensite`, `a2dissite`, and `a2enconf`, `a2disconf` . See their respective man pages for detailed information.
- The binary is called apache2. Due to the use of environment variables, in the default configuration, apache2 needs to be started/stopped with `/etc/init.d/apache2` or `apache2ctl`. **Calling `/usr/bin/apache2` directly will not work** with the default configuration.

Document Roots

Nejc Dolinar

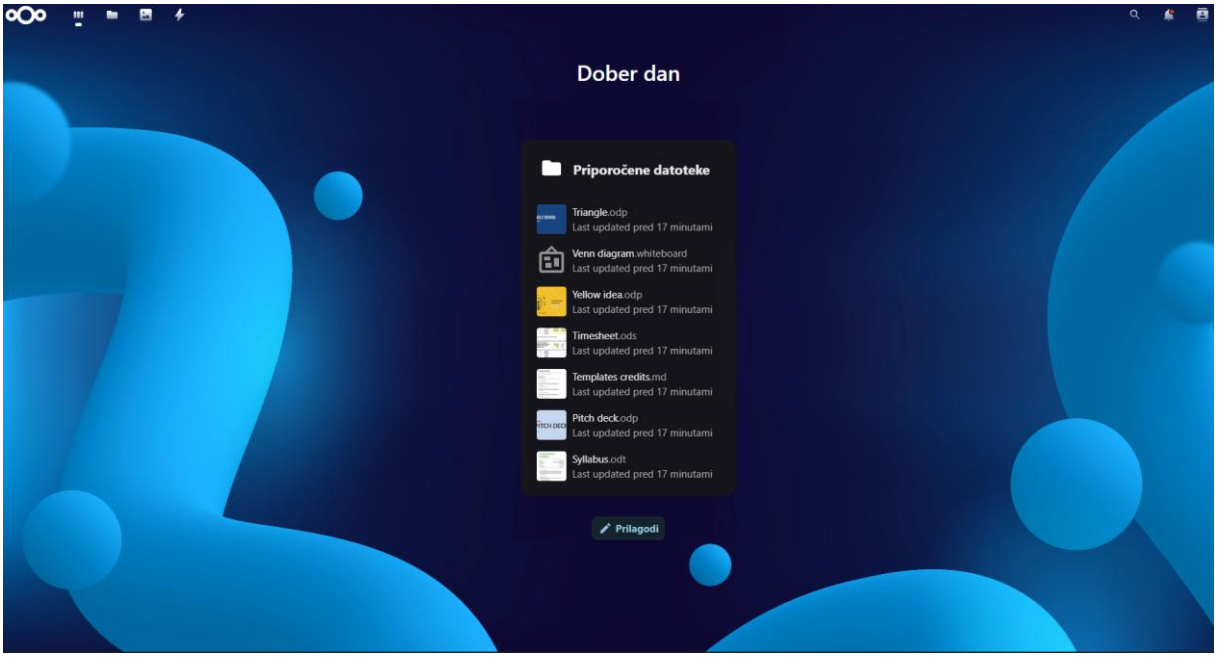

```
root@nejcdolinar:~# systemctl stop apache2
root@nejcdolinar:~# snap restart nextcloud
2026-03-25T14:50:43+01:00 INFO Waiting for "snap.nextcloud.mysql.service" to stop.
Restarted.
root@nejcdolinar:~# nextcloud.occ config:system:get trusted_domains
-bash: nextcloud.occ: command not found
root@nejcdolinar:~# nextcloud.occ config:system:get trusted_domains
-bash: nextcloud.occ: command not found
root@nejcdolinar:~# /snap/bin/nextcloud.occ config:system:set trusted_domains 1 --value=192.168.1.116
System config value trusted_domains => 1 set to string 192.168.1.116
root@nejcdolinar:~# _
```