VAJA 7 – Nejc Dolinar

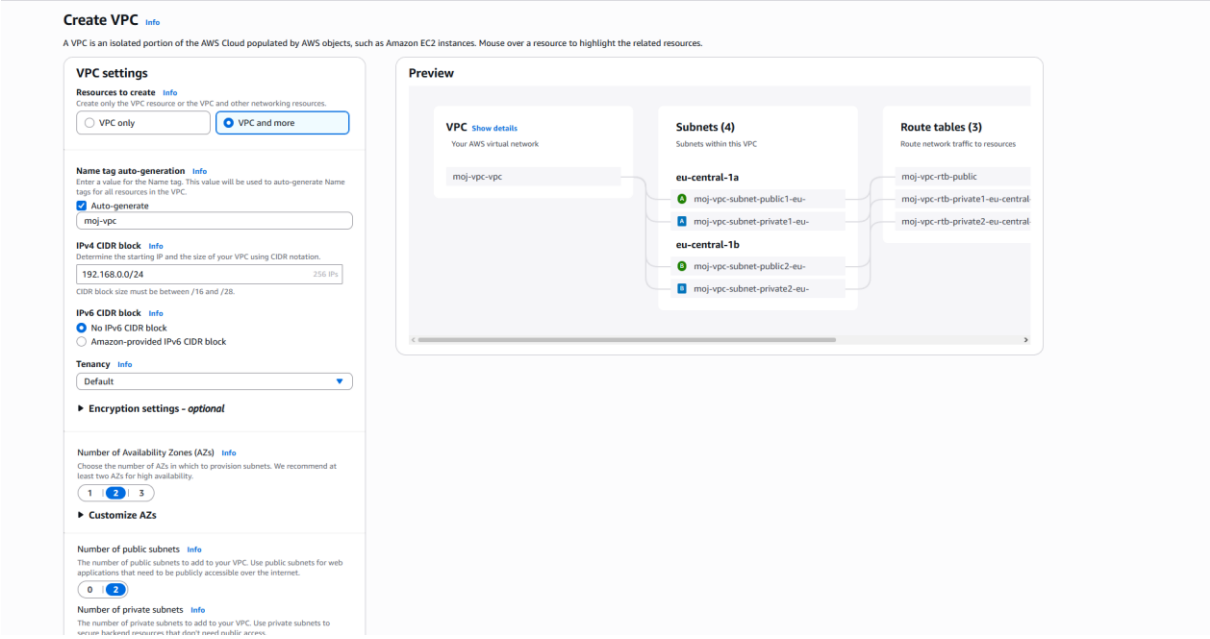

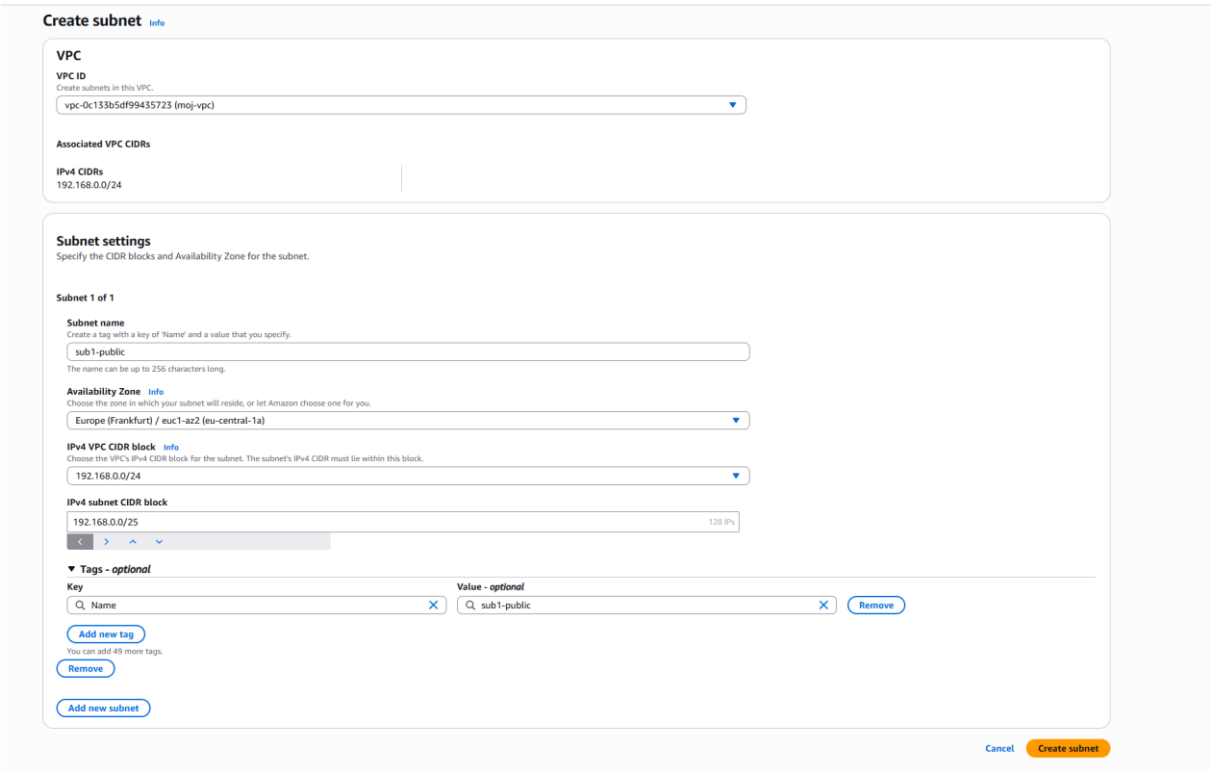

Create subnet Info

VPC

VPC ID
Create subnets in this VPC.
vpc-0c133b5df99435723 (moj-vpc)

Associated VPC CIDRs

IPv4 CIDRs
192.168.0.0/24

Subnet settings
Specify the CIDR blocks and Availability Zone for the subnet.

Subnet 1 of 1

Subnet name
Create a tag with a key of 'Name' and a value that you specify.
sub2-private
The name can be up to 256 characters long.

Availability Zone Info
Choose the zone in which your subnet will reside, or let Amazon choose one for you.
Europe (Frankfurt) / euc1-az3 (eu-central-1b)

IPv4 VPC CIDR block Info
Choose the VPC's IPv4 CIDR block for the subnet. The subnet's IPv4 CIDR must lie within this block.
192.168.0.0/24

IPv4 subnet CIDR block
192.168.0.128/26 64 IPs

Tags - *optional*

Key	Value - *optional*	
Name	sub2-private	Remove

Add new tag
You can add 49 more tags.
Remove

Add new subnet

Cancel Create subnet

Create subnet Info

VPC

VPC ID
Create subnets in this VPC.
vpc-0c133b5df99435723 (moj-vpc)

Associated VPC CIDRs

IPv4 CIDRs
192.168.0.0/24

Subnet settings
Specify the CIDR blocks and Availability Zone for the subnet.

Subnet 1 of 1

Subnet name
Create a tag with a key of 'Name' and a value that you specify.
sub3-private
The name can be up to 256 characters long.

Availability Zone Info
Choose the zone in which your subnet will reside, or let Amazon choose one for you.
Europe (Frankfurt) / euc1-az1 (eu-central-1c)

IPv4 VPC CIDR block Info
Choose the VPC's IPv4 CIDR block for the subnet. The subnet's IPv4 CIDR must lie within this block.
192.168.0.0/24

IPv4 subnet CIDR block
192.168.0.192/27 32 IPs

Tags - *optional*

Key	Value - *optional*	
Name	sub3-private	Remove

Add new tag
You can add 49 more tags.
Remove

Add new subnet

Cancel Create subnet

© 2026, Amazon Web Services, Inc. or its affiliates. Privacy

igw-052db9e71e6a2e86a / sub1-rtpublic

Actions

Details Info

Internet gateway ID	State	VPC ID	Owner
igw-052db9e71e6a2e86a	Attached	vpc-0c133b5df99435723 | moj-vpc	159858924832

Tags (1)

Manage tags

Search tags

Key	Value
Name	sub1-rtpublic

rtb-0aa071dc866479165 / rt-public

Actions

Details Info

Route table ID	Main	Explicit subnet associations	Edge associations
rtb-0aa071dc866479165	No	subnet-09350b37df0c5e6aa / sub1-public	–
VPC	**Owner ID**		
vpc-0c133b5df99435723 | moj-vpc	159858924832		

Routes | Subnet associations | Edge associations | Route propagation | Tags

Routes (2)

Both | Edit routes

Filter routes

Destination	Target	Status	Propagated	Route Origin
0.0.0.0/0	igw-052db9e71e6a2e86a	Active	No	Create Route
192.168.0.0/24	local	Active	No	Create Route Table

Create key pair Info

Key pair

A key pair, consisting of a private key and a public key, is a set of security credentials that you use to prove your identity when connecting to an instance.

Name

moj-kljuc

The name can include up to 255 ASCII characters. It can't include leading or trailing spaces.

Key pair type Info

- (●) RSA
- ( ) ED25519

Private key file format

- ( ) .pem
  For use with OpenSSH
- (●) .ppk
  For use with PuTTY

Tags - *optional*

No tags associated with the resource.

Add new tag

You can add up to 50 more tags.

Cancel | Create key pair

Basic details

Security group name Info

SG-Web

Name cannot be edited after creation.

Description Info

Allows SSH access to developers

VPC Info

vpc-0c133b5df99435723 (moj-vpc)

Inbound rules Info

Type Info	Protocol Info	Port range Info	Source Info		Description - optional Info	
SSH	TCP	22	My IP	84.52.159.184/32		Delete
HTTP	TCP	80	Anywhe...	0.0.0.0/0		Delete
HTTPS	TCP	443	Anywhe...	0.0.0.0/0		Delete

Add rule

Rules with source of 0.0.0.0/0 or ::/0 allow all IP addresses to access your instance. We recommend setting security group rules to allow access from known IP addresses only.

Outbound rules Info

Type Info	Protocol Info	Port range Info	Destination Info		Description - optional Info	
All traffic	All	All	Custom	0.0.0.0/0		Delete

Add rule

Rules with destination of 0.0.0.0/0 or ::/0 allow your instances to send traffic to any IPv4 or IPv6 address. We recommend setting security group rules to be more restrictive and to only allow traffic to specific known IP addresses.

Tags - *optional*

A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.

No tags associated with the resource.

Add new tag

You can add up to 50 more tags

Cancel | Create security group

Create security group Info

A security group acts as a virtual firewall for your instance to control inbound and outbound traffic. To create a new security group, complete the fields below.

Basic details

Security group name Info

SG-DB

Name cannot be edited after creation.

Description Info

DB

VPC Info

vpc-0c133b5df99435723 (moj-vpc)

Inbound rules Info

Type Info	Protocol Info	Port range Info	Source Info		Description - optional Info	
SSH	TCP	22	My IP	84.52.159.184/32		Delete
MYSQL/Aurora	TCP	3306	Custom	sg-01c3294e972413d39 sg-01c3294e972413d39		Delete

Add rule

Outbound rules Info

Type Info	Protocol Info	Port range Info	Destination Info		Description - optional Info	
All traffic	All	All	Custom	0.0.0.0/0		Delete

Add rule

Rules with destination of 0.0.0.0/0 or ::/0 allow your instances to send traffic to any IPv4 or IPv6 address. We recommend setting security group rules to be more restrictive and to only allow traffic to specific known IP addresses.

Tags - *optional*

A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.

No tags associated with the resource.

Add new tag

You can add up to 50 more tags

Cancel | Create security group

Name and tags Info

Name

ECS2-1-web

Add additional tags

Application and OS Images (Amazon Machine Image) Info

An AMI contains the operating system, application server, and applications for your instance. If you don't see a suitable AMI below, use the search field or choose **Browse more AMIs**.

Search our full catalog including 1000s of application and OS images

Quick Start

Amazon Linux | macOS | Ubuntu | Windows | Red Hat | SUSE Linux | Debian

Browse more AMIs

Including AMIs from AWS, Marketplace and the Community

Amazon Machine Image (AMI)

Debian 13 (HVM), SSD Volume Type — Free tier eligible

ami-0da1f66573556d917 (64-bit (x86)) / ami-08241d277446b81d7 (64-bit (Arm))

Virtualization: hvm ENA enabled: true Root device type: ebs

Description

Debian 13 (HVM), EBS General Purpose (SSD) Volume Type. Community developed free GNU/Linux distribution. https://www.debian.org/

Debian 13 (20260316-2418)

Architecture	AMI ID	Publish Date	Username	
64-bit (x86)	ami-0da1f66573556d917	2026-03-16	admin	Verified provider

Instance type Info | Get advice

Instance type

t3.micro — Free tier eligible

Family: t3 2 vCPU 1 GiB Memory Current generation: true On-Demand SUSE base pricing: 0.012 USD per Hour
On-Demand RHEL base pricing: 0.0408 USD per Hour On-Demand Linux base pricing: 0.012 USD per Hour
On-Demand Ubuntu Pro base pricing: 0.0155 USD per Hour On-Demand Windows base pricing: 0.0212 USD per Hour

All generations

Compare instance types

Additional costs apply for AMIs with pre-installed software

Key pair (login) Info

You can use a key pair to securely connect to your instance. Ensure that you have access to the selected key pair before you launch the instance.

Key pair name - *required*

moj-kljuc

Create new key pair

Network settings Info

VPC - *required* | Info

vpc-0c133b5df99435723 (moj-vpc)
192.168.0.0/24

Subnet | Info

subnet-09350b37df0c5e6aa — sub1-public

VPC: vpc-0c133b5df99435723 Owner: 159858924832 Availability Zone: eu-central-1a (euc1-az2)
Zone type: Availability Zone IP addresses available: 123 CIDR: 192.168.0.0/25)

Create new subnet

Auto-assign public IP | Info

Enable

Firewall (security groups) | Info

A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.

Create security group | Select existing security group

Common security groups | Info

Select security groups

Compare security group rules

SG-Web sg-01c3294e972413d39
VPC: vpc-0c133b5df99435723

Security groups that you add or remove here will be added to or removed from all your network interfaces.

Advanced network configuration

Summary

Number of instances | Info

1

Software Image (AMI)
Debian 13 (20260316-2418)
ami-0da1f66573556d917

Virtual server type (instance type)
t3.micro

Firewall (security group)
SG-Web

Storage (volumes)
1 volume(s) - 8 GiB

Cancel | Launch instance | Preview code

Create NAT gateway Info

A highly available, managed Network Address Translation (NAT) service that instances in private subnets can use to connect to services in other VPCs, on-premises networks, or the internet.

NAT gateway settings

Name - *optional*

Create a tag with a key of 'Name' and a value that you specify.

nat-gw

The name can be up to 256 characters long.

Availability mode Info

Choose whether to deploy across all zones in the region or restrict to a single availability zone.

- Regional - *new* — Scales automatically across all regional AZs, simplifying management for multi AZ deployments.
- Zonal — Provides granular control within a specific availability zone, adhering to subnet level settings.

Subnet

Select a subnet in which to create the NAT gateway.

subnet-09350b37df0c5e6aa (sub1-public)

Connectivity type

Select a connectivity type for the NAT gateway.

- Public
- Private

Elastic IP allocation ID Info

Assign an Elastic IP address to the NAT gateway.

eipalloc-0ff5083ad37a6210e — Allocate Elastic IP

Additional settings Info

Tags

A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.

Key	Value - *optional*	
Name	nat-gw	Remove

Add new tag

You can add 49 more tags.

Cancel | Create NAT gateway

Web Server

sudo apt update && sudo apt upgrade -y

sudo apt install apache2 php libapache2-mod-php php-mysqli -y

sudo systemctl enable apache2

sudo systemctl start apache2

cd /var/www/html

sudo rm index.html

sudo nano index.html

```
<!DOCTYPE html>
<html lang="sl">
<head>
  <meta charset="UTF-8">
  <title>Moja aplikacija</title>
</head>
<body>
  <h1>Dobrodošli!</h1>
  <a href="vnos.php">Vnesi podatek</a> |
  <a href="izpis.php">Izpiši podatke</a>
</body>
</html>
```

sudo systemctl start apache2

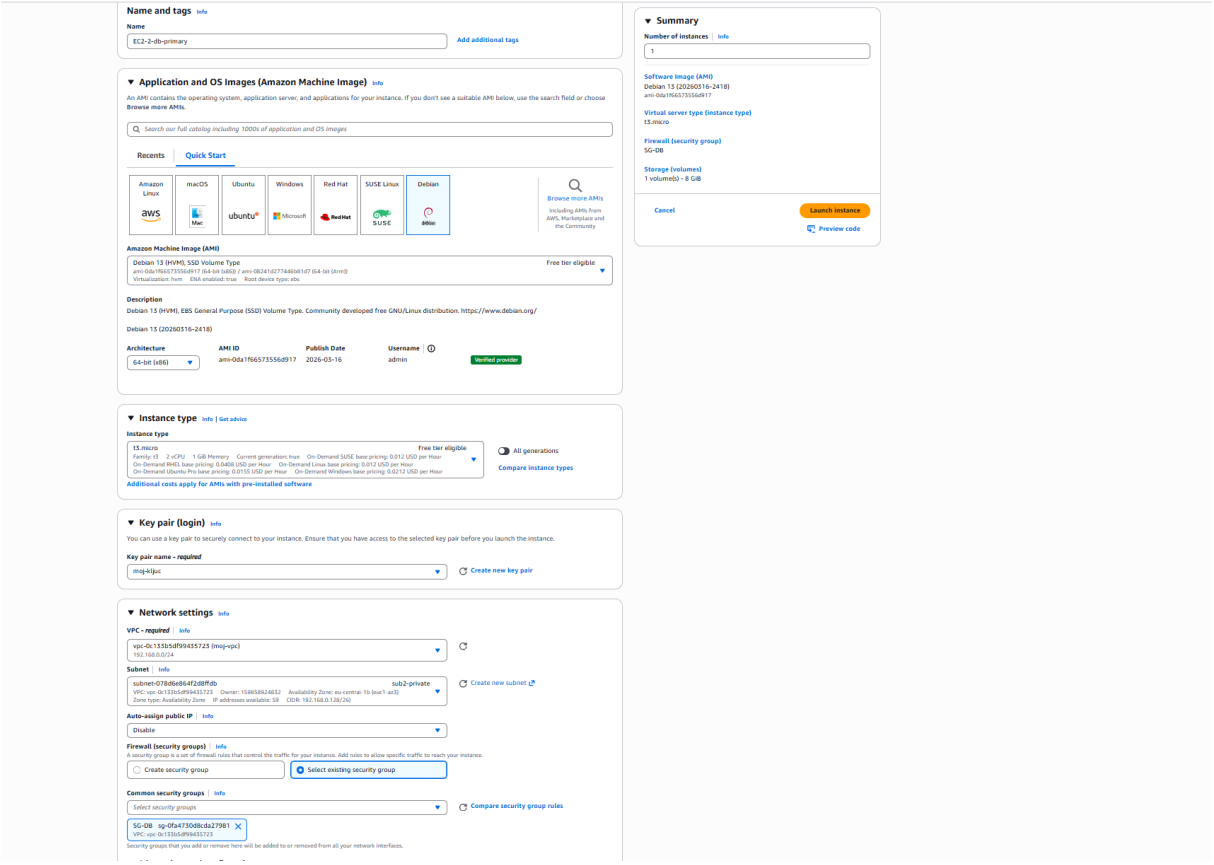

MariaDB

sudo apt update && sudo apt upgrade -y

sudo apt install mariadb-server -y

apt list --installed 2>/dev/null | grep mariadb

sudo systemctl status mariadb

sudo mysql

ALTER USER 'root'@'localhost' IDENTIFIED BY 'RootGeslo!23';

FLUSH PRIVILEGES;

EXIT;

sudo mysql -u root -p

Enter password: RootGeslo!23

-- Odstranite anonimne uporabnike

DELETE FROM mysql.user WHERE User='';

```
-- Preprečite root remote login
DELETE FROM mysql.user WHERE User='root' AND Host NOT IN ('localhost', '127.0.0.1', '::1');

-- Odstranite test bazo
DROP DATABASE IF EXISTS test;

FLUSH PRIVILEGES;
EXIT;
-- Nov admin uporabnik
CREATE USER 'admin_user'@'%' IDENTIFIED BY 'AdminGeslo!23';
GRANT ALL PRIVILEGES ON *.* TO 'admin_user'@'%' WITH GRANT OPTION;

-- Spletni uporabnik
CREATE USER 'webuser'@'%' IDENTIFIED BY 'geslo123';

-- Baza
CREATE DATABASE mojapb;
USE mojapb;

-- Tabela
CREATE TABLE osebe (
  id INT AUTO_INCREMENT PRIMARY KEY,
  ime VARCHAR(100) NOT NULL,
  ustvarjeno TIMESTAMP DEFAULT CURRENT_TIMESTAMP
);

-- Pravice webuser
GRANT ALL PRIVILEGES ON mojapb.* TO 'webuser'@'%';

-- Testni podatki
INSERT INTO osebe (ime) VALUES ('Janez Novak');
```

```
INSERT INTO osebe (ime) VALUES ('Ana Kovač');

-- Preverite
SELECT * FROM osebe;

FLUSH PRIVILEGES;
EXIT;
```

sudo nano /etc/mysql/mariadb.conf.d/50-server.cnf

bind-address = 127.0.0.1 -> bind-address = 0.0.0.0

sudo systemctl restart mariadb

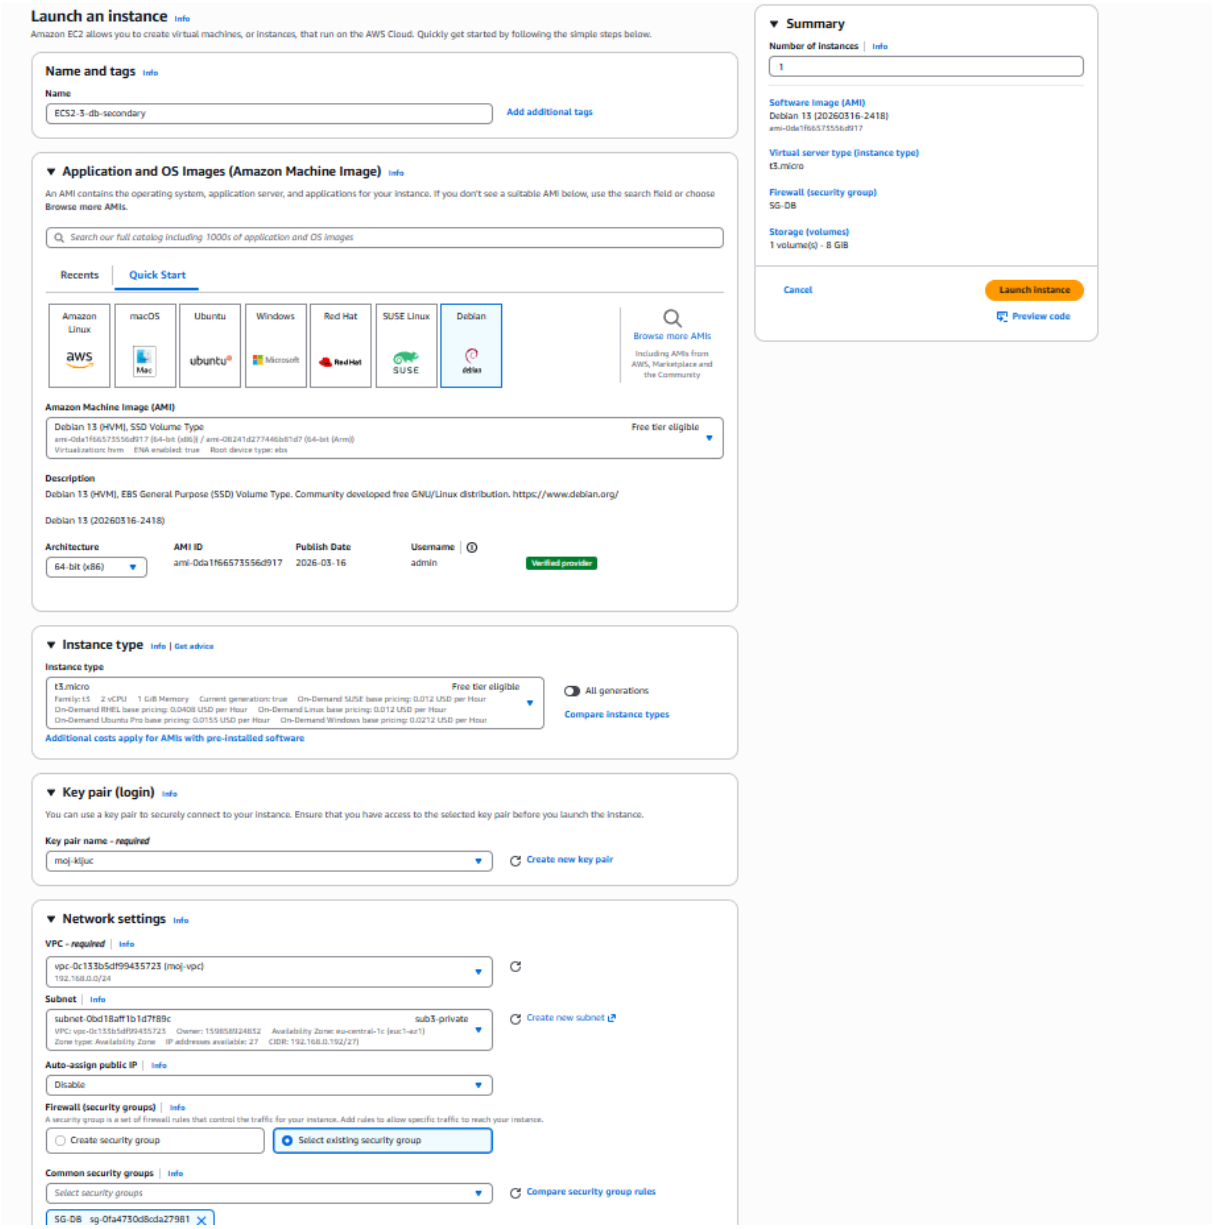

BACKUP Server

sudo apt update -y

sudo apt install -y mariadb-server

sudo systemctl enable mariadb

sudo systemctl start mariadb

sudo apt list --installed **2**>/dev/null | grep mariadb

sudo systemctl restart mariadb