ŠTUDENT: ENEJ VOLMUT

PREDAVANJE 6

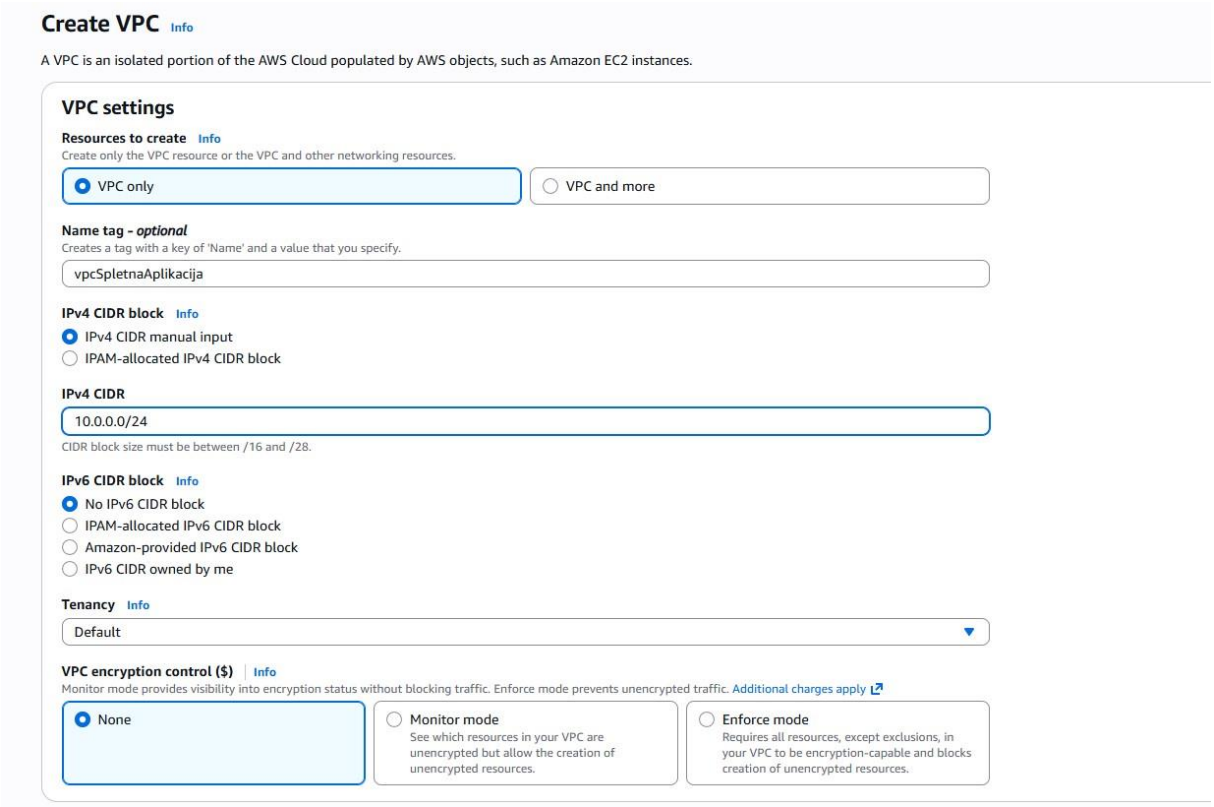

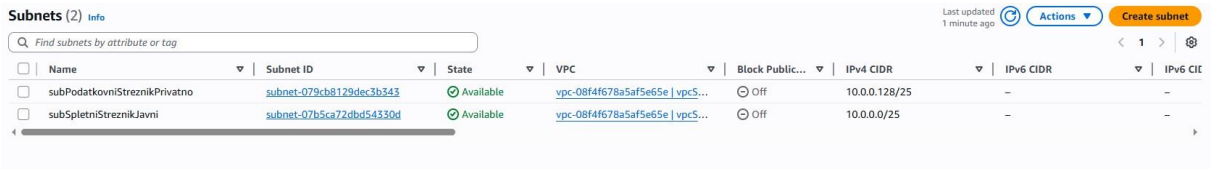

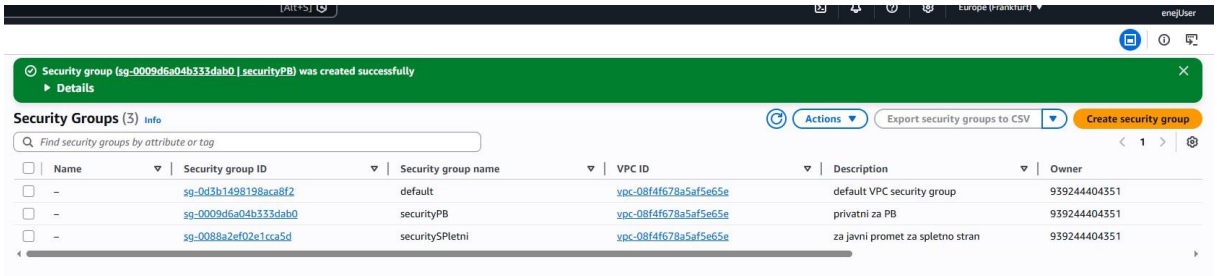

Instance summary for i-06f00f952fd0e6a56 (EC2spletna) Info

Connect | Instance state | Actions

Updated less than a minute ago

Instance ID
i-06f00f952fd0e6a56

IPv6 address
–

Hostname type
IP name: ip-10-0-0-75.eu-central-1.compute.internal

Answer private resource DNS name
–

Auto-assigned IP address
3.64.7.197 [Public IP]

IAM role
–

IMDSv2
Required

Operator
–

Public IPv4 address
3.64.7.197 | open address

Instance state
Running

Private IP DNS name (IPv4 only)
ip-10-0-0-75.eu-central-1.compute.internal

Instance type
t3.micro

VPC ID
vpc-08f4f678a5af5e65e (vpcSpletnaAplikacija)

Subnet ID
subnet-07b5ca72dbd54330d (subSpletniStreznikJavni)

Instance ARN
arn:aws:ec2:eu-central-1:939244404351:instance/i-06f00f952fd0e6a56

Private IPv4 addresses
10.0.0.75

Public DNS
–

Elastic IP addresses
–

AWS Compute Optimizer finding
Opt-in to AWS Compute Optimizer for recommendations. | Learn more

Auto Scaling Group name
–

Managed
false

Details | Status and alarms | Monitoring | Security | Networking | Storage | Tags

Instance details Info

AMI ID
ami-0da1f66573556d917

AMI name
debian-13-amd64-20260316-2418

Stop protection
Disabled

Monitoring
disabled

Allowed image
-

Launch time
Mon Apr 13 2026 18:01:42 GMT+0200 (Srednjeevropski poletni čas) (less than a minute)

Platform details
Linux/UNIX

Termination protection
Disabled

AMI location
amazon/debian-13-amd64-20260316-2418

Instance summary for i-02454d24ecfc0bbde (EC2podatkovnaBaza) Info

Connect | Instance state | Actions

Updated less than a minute ago

Instance ID
i-02454d24ecfc0bbde

IPv6 address
–

Hostname type
IP name: ip-10-0-0-239.eu-central-1.compute.internal

Answer private resource DNS name
–

Auto-assigned IP address
–

IAM role
–

IMDSv2
Required

Operator
–

Public IPv4 address
–

Instance state
Running

Private IP DNS name (IPv4 only)
ip-10-0-0-239.eu-central-1.compute.internal

Instance type
t3.micro

VPC ID
vpc-08f4f678a5af5e65e (vpcSpletnaAplikacija)

Subnet ID
subnet-079cb8129dec3b343 (subPodatkovniStreznikPrivatno)

Instance ARN
arn:aws:ec2:eu-central-1:939244404351:instance/i-02454d24ecfc0bbde

Private IPv4 addresses
10.0.0.239

Public DNS
–

Elastic IP addresses
–

AWS Compute Optimizer finding
Opt-in to AWS Compute Optimizer for recommendations. | Learn more

Auto Scaling Group name
–

Managed
false

Details | Status and alarms | Monitoring | Security | Networking | Storage | Tags

Instance details Info

AMI ID
ami-0da1f66573556d917

AMI name
debian-13-amd64-20260316-2418

Stop protection
Disabled

Monitoring
disabled

Allowed image
-

Launch time
Mon Apr 13 2026 18:04:21 GMT+0200 (Srednjeevropski poletni čas) (1 minute)

Platform details
Linux/UNIX

Termination protection
Disabled

AMI location
amazon/debian-13-amd64-20260316-2418

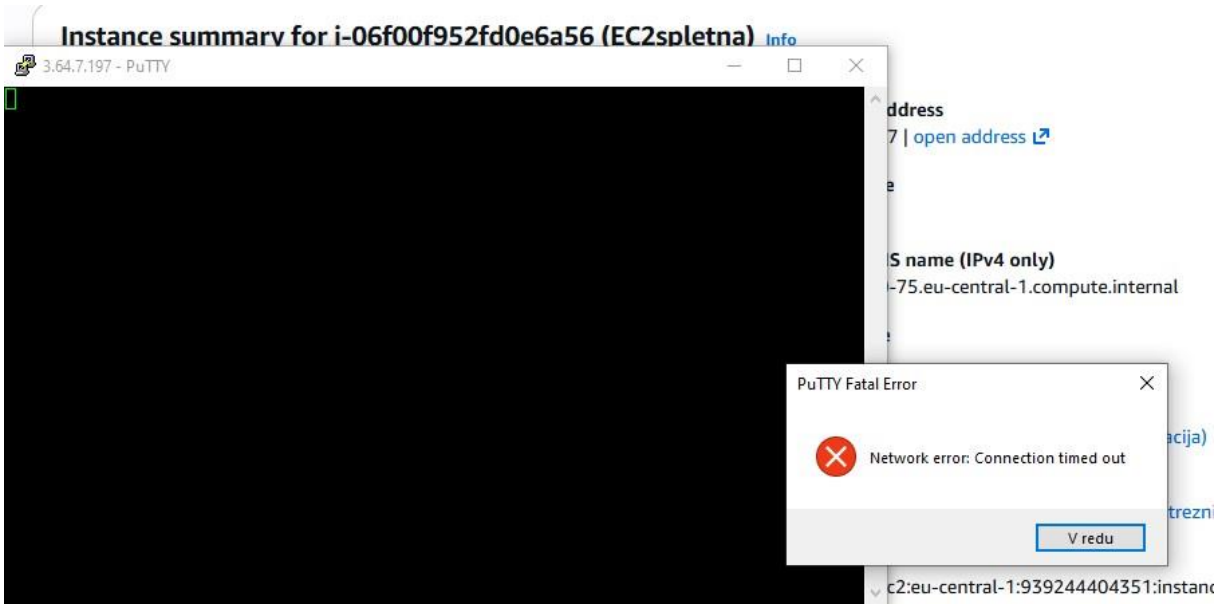
Instance summary for i-06f00f952fd0e6a56 (EC2spletna) Info
3.64.7.197 - PuTTY
ddress
7 | open address
S name (IPv4 only)
-75.eu-central-1.compute.internal
PuTTY Fatal Error
Network error: Connection timed out
V redu
c2:eu-central-1:939244404351:instanc

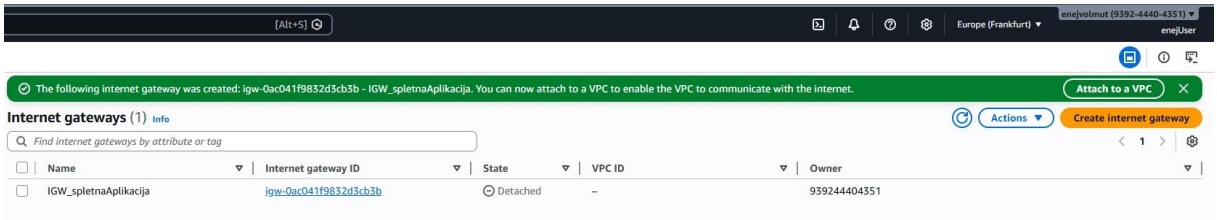
[Alt+S]
Europe (Frankfurt)
enejvolmut (9392-4440-4351)
enejUser
The following internet gateway was created: igw-0ac041f9832d3cb3b - IGW_spletnaAplikacija. You can now attach to a VPC to enable the VPC to communicate with the internet.
Attach to a VPC
Internet gateways (1) Info
Actions
Create internet gateway
Find internet gateways by attribute or tag
Name
Internet gateway ID
State
VPC ID
Owner
IGW_spletnaAplikacija
igw-0ac041f9832d3cb3b
Detached
–
939244404351

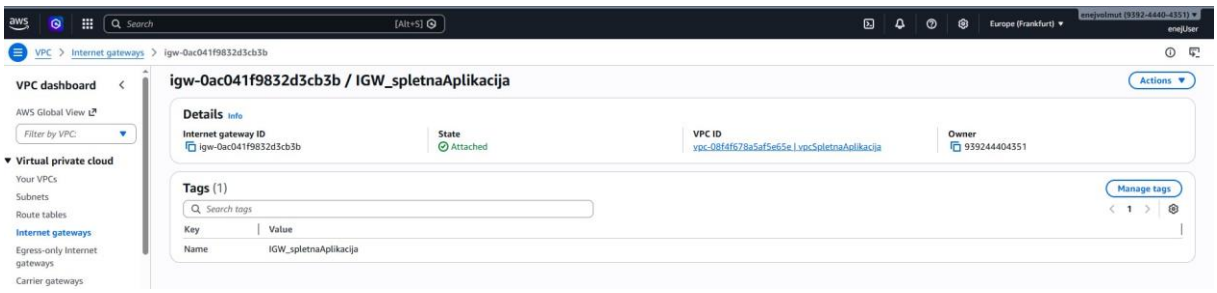
Search
[Alt+S]
Europe (Frankfurt)
enejvolmut (9392-4440-4351)
enejUser
VPC > Internet gateways > igw-0ac041f9832d3cb3b
VPC dashboard
AWS Global View
Filter by VPC
Virtual private cloud
Your VPCs
Subnets
Route tables
Internet gateways
Egress-only Internet gateways
Carrier gateways
igw-0ac041f9832d3cb3b / IGW_spletnaAplikacija
Actions
Details Info
Internet gateway ID
igw-0ac041f9832d3cb3b
State
Attached
VPC ID
vpc-08f4f678a5af5e65e | vpcSpletnaAplikacija
Owner
939244404351
Tags (1)
Manage tags
Search tags
Key
Value
Name
IGW_spletnaAplikacija

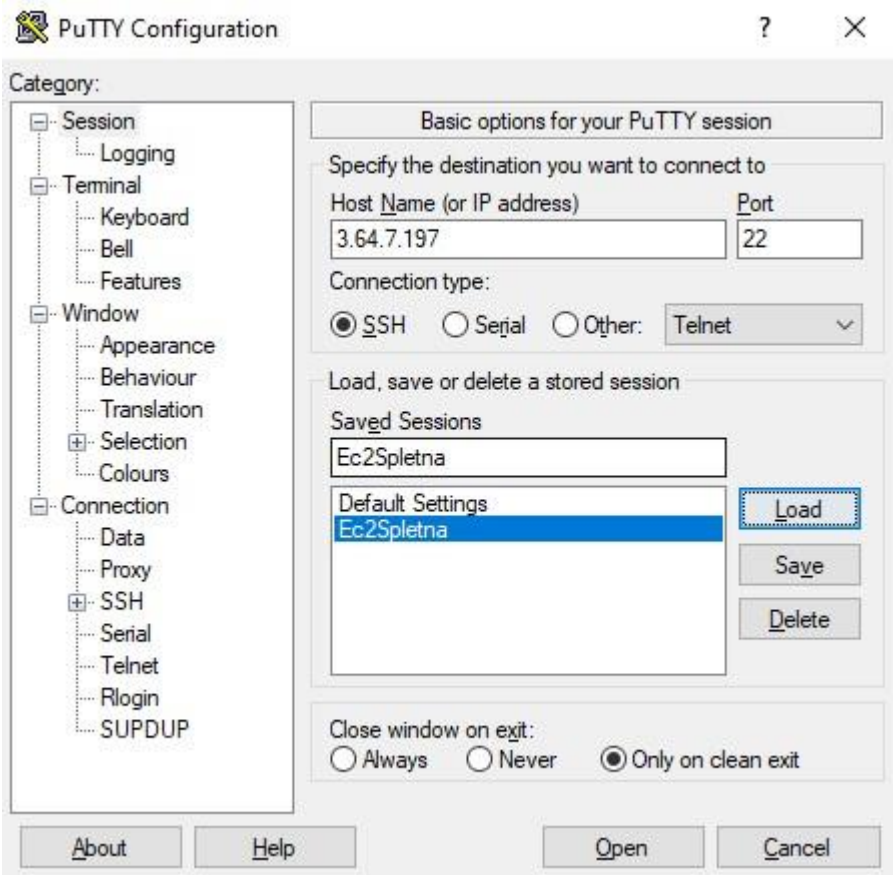
PuTTY Configuration
Category:
Session
Logging
Terminal
Keyboard
Bell
Features
Window
Appearance
Behaviour
Translation
Selection
Colours
Connection
Data
Proxy
SSH
Serial
Telnet
Rlogin
SUPDUP
Basic options for your PuTTY session
Specify the destination you want to connect to
Host Name (or IP address)
Port
3.64.7.197
22
Connection type:
SSH
Serial
Other:
Telnet
Load, save or delete a stored session
Saved Sessions
Ec2Spletna
Default Settings
Ec2Spletna
Load
Save
Delete
Close window on exit:
Always
Never
Only on clean exit
About
Help
Open
Cancel

admin@ip-10-0-0-75: ~
login as: admin
Authenticating with public key "key2026ppk"
Linux ip-10-0-0-75 6.12.74+deb13+1-cloud-amd64 #1 SMP PREEMPT_DYNAMIC Debian 6.12.74-2 (2026-03-08) x86_64
The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.
Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
Last login: Mon Apr 13 16:15:09 2026 from 86.58.33.220
admin@ip-10-0-0-75:~$

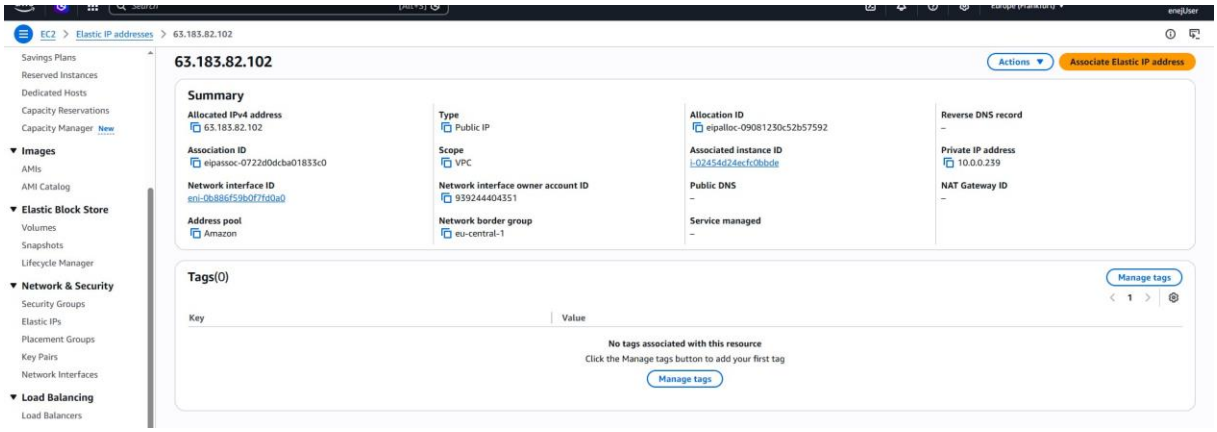
EC2 > Elastic IP addresses > 63.183.82.102
Savings Plans
Reserved Instances
Dedicated Hosts
Capacity Reservations
Capacity Manager New
Images
AMIs
AMI Catalog
Elastic Block Store
Volumes
Snapshots
Lifecycle Manager
Network & Security
Security Groups
Elastic IPs
Placement Groups
Key Pairs
Network Interfaces
Load Balancing
Load Balancers
63.183.82.102
Actions
Associate Elastic IP address
Summary
Allocated IPv4 address
63.183.82.102
Type
Public IP
Allocation ID
eipalloc-09081230c52b57592
Reverse DNS record
–
Association ID
eipassoc-0722d0dcba01833c0
Scope
VPC
Associated instance ID
i-02454d24ecfc0bbde
Private IP address
10.0.0.239
Network interface ID
eni-0b886f59b0f7fd0a0
Network interface owner account ID
939244404351
Public DNS
–
NAT Gateway ID
–
Address pool
Amazon
Network border group
eu-central-1
Service managed
–
Tags(0)
Manage tags
Key
Value
No tags associated with this resource
Click the Manage tags button to add your first tag
Manage tags

63.183.82.102

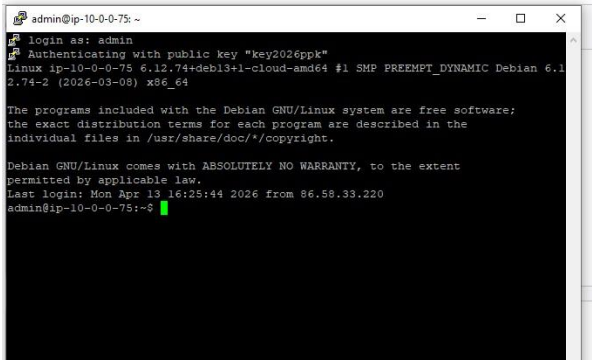
admin@ip-10-0-0-75: ~
login as: admin
Authenticating with public key "key2026ppk"
Linux ip-10-0-0-75 6.12.74+deb13+1-cloud-amd64 #1 SMP PREEMPT_DYNAMIC Debian 6.1
2.74-2 (2026-03-08) x86_64
The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.
Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
Last login: Mon Apr 13 16:25:44 2026 from 86.58.33.220
admin@ip-10-0-0-75:~$

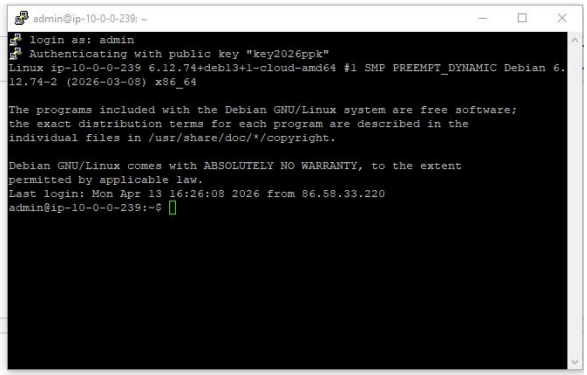
admin@ip-10-0-0-239: ~
login as: admin
Authenticating with public key "key2026ppk"
Linux ip-10-0-0-239 6.12.74+deb13+1-cloud-amd64 #1 SMP PREEMPT_DYNAMIC Debian 6.
12.74-2 (2026-03-08) x86_64
The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.
Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
Last login: Mon Apr 13 16:26:08 2026 from 86.58.33.220
admin@ip-10-0-0-239:~$

admin@ip-10-0-0-239: ~

```
es [127 kB]
Get:17 https://cdn-aws.deb.debian.org/debian-security trixie-security/main amd64
 Packages [122 kB]
Get:18 https://cdn-aws.deb.debian.org/debian-security trixie-security/main Trans
lation-en [77.0 kB]
Fetched 27.9 MB in 2s (11.4 MB/s)
11 packages can be upgraded. Run 'apt list --upgradable' to see them.
admin@ip-10-0-0-239:~$ sudo apt update
Get:1 file:/etc/apt/mirrors/debian.list Mirrorlist [38 B]
Get:2 file:/etc/apt/mirrors/debian-security.list Mirrorlist [47 B]
Hit:3 https://cdn-aws.deb.debian.org/debian trixie InRelease
Hit:4 https://cdn-aws.deb.debian.org/debian trixie-updates InRelease
Hit:5 https://cdn-aws.deb.debian.org/debian trixie-backports InRelease
Hit:6 https://cdn-aws.deb.debian.org/debian-security trixie-security InRelease
11 packages can be upgraded. Run 'apt list --upgradable' to see them.
admin@ip-10-0-0-239:~$ sudo apt install mariadb-server
Installing:
  mariadb-server

Installing dependencies:
  galera-4                    libmpfr6
  gawk                        libncurses6
  libcgi-fast-perl            libpcre2-posix3
  libcgi-pm-perl              libperl5.40
  libclone-perl               libsigsegv2
  libconfig-inifiles-perl     libsnappy1v5
  libdbd-mariadb-perl         libterm-readkey-perl
  libdbi-perl                 libtimedate-perl
  libencode-locale-perl       liburi-perl
  libfcgi-bin                 lsof
  libfcgi-perl                mariadb-client
  libfcgi0t64                 mariadb-client-core
  libgdbm-compat4t64          mariadb-common
  libhtml-parser-perl         mariadb-plugin-provider-bzip2
  libhtml-tagset-perl         mariadb-plugin-provider-lz4
  libhtml-template-perl       mariadb-plugin-provider-lzma
  libhttp-date-perl           mariadb-plugin-provider-lzo
  libhttp-message-perl        mariadb-plugin-provider-snappy
  libio-compress-brotli-perl  mariadb-server-core
  libio-html-perl             mysql-common
  liblsof0                    perl
  liblwp-mediatypes-perl      perl-modules-5.40
  liblzo2-2                   pv
  libmariadb3                 rsync

Suggested packages:
  gawk-doc                 mailx
```

admin@ip-10-0-0-239: ~

```
Password updated successfully!
Reloading privilege tables..
 ... Success!


By default, a MariaDB installation has an anonymous user, allowing anyone
to log into MariaDB without having to have a user account created for
them.  This is intended only for testing, and to make the installation
go a bit smoother.  You should remove them before moving into a
production environment.

Remove anonymous users? [Y/n] y
SQL executed without errors!
The operation might have been successful, or it might have not done anything.

Normally, root should only be allowed to connect from 'localhost'.  This
ensures that someone cannot guess at the root password from the network.

Disallow root login remotely? [Y/n] y
SQL executed without errors!
The operation might have been successful, or it might have not done anything.

By default, MariaDB comes with a database named 'test' that anyone can
access.  This is also intended only for testing, and should be removed
before moving into a production environment.

Remove test database and access to it? [Y/n] y
 - Dropping test database...
SQL executed without errors!
The operation might have been successful, or it might have not done anything.
 - Removing privileges on test database...
SQL executed without errors!
The operation might have been successful, or it might have not done anything.

Reloading the privilege tables will ensure that all changes made so far
will take effect immediately.

Reload privilege tables now? [Y/n] y
 ... Success!

Cleaning up...

All done!  If you've completed all of the above steps, your MariaDB
installation should now be secure.

Thanks for using MariaDB!
admin@ip-10-0-0-239:~$
```

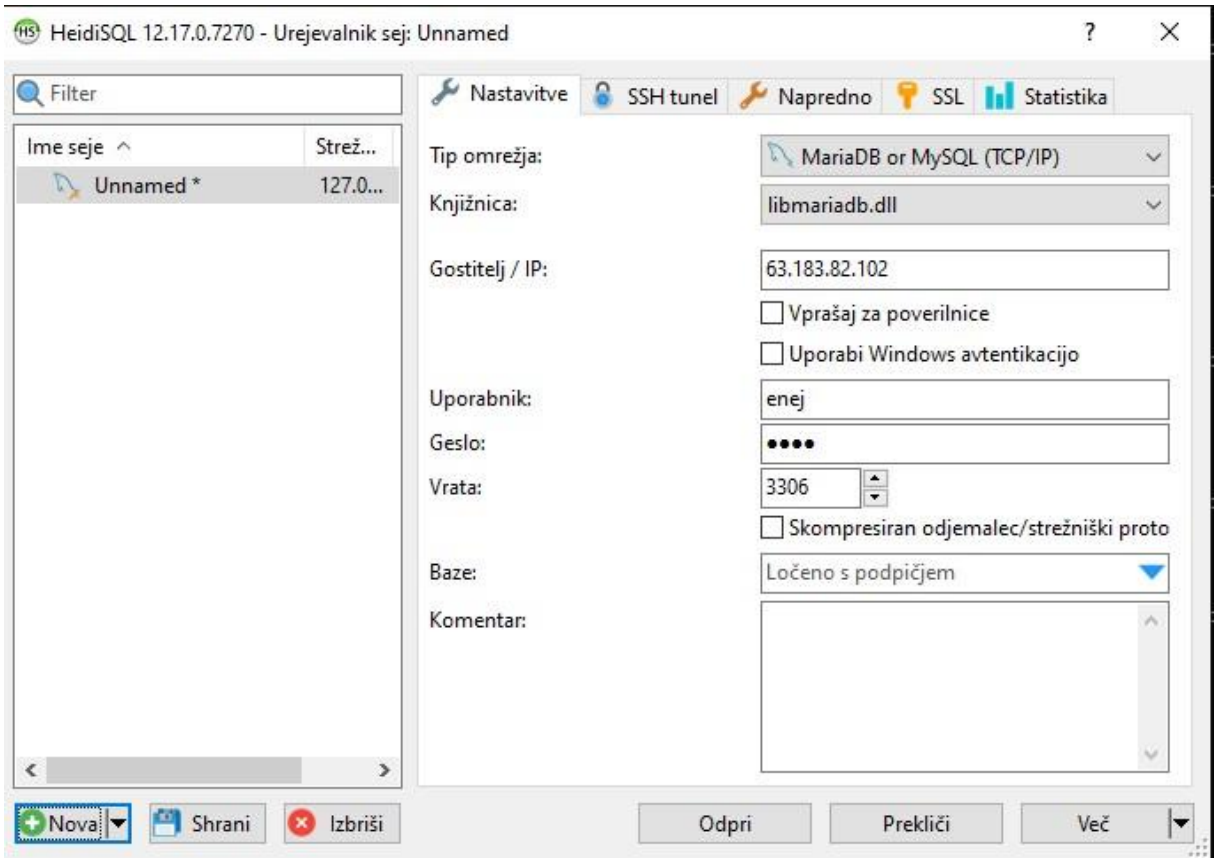
HeidiSQL 12.17.0.7270 - Urejevalnik sej: Unnamed
Filter
Ime seje
Strež...
Unnamed *
127.0...
Nastavitve
SSH tunel
Napredno
SSL
Statistika
Tip omrežja:
MariaDB or MySQL (TCP/IP)
Knjižnica:
libmariadb.dll
Gostitelj / IP:
63.183.82.102
Vprašaj za poverilnice
Uporabi Windows avtentikacijo
Uporabnik:
enej
Geslo:
Vrata:
3306
Skompresiran odjemalec/strežniški proto
Baze:
Ločeno s podpičjem
Komentar:
Nova
Shrani
Izbriši
Odpri
Prekliči
Več

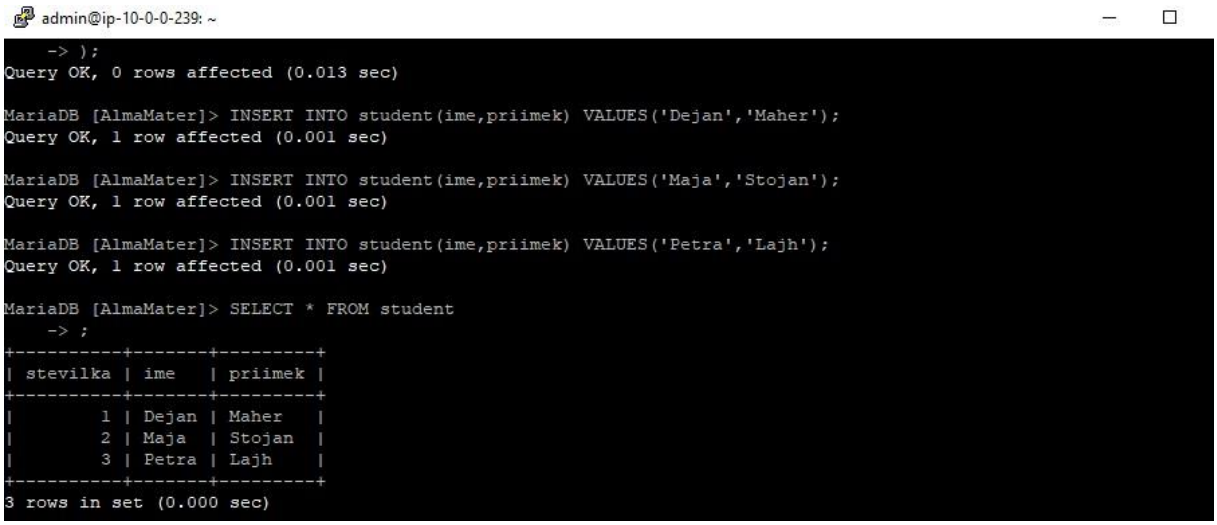
admin@ip-10-0-0-239: ~
->);
Query OK, 0 rows affected (0.013 sec)
MariaDB [AlmaMater]> INSERT INTO student(ime,priimek) VALUES('Dejan','Maher');
Query OK, 1 row affected (0.001 sec)
MariaDB [AlmaMater]> INSERT INTO student(ime,priimek) VALUES('Maja','Stojan');
Query OK, 1 row affected (0.001 sec)
MariaDB [AlmaMater]> INSERT INTO student(ime,priimek) VALUES('Petra','Lajh');
Query OK, 1 row affected (0.001 sec)
MariaDB [AlmaMater]> SELECT * FROM student
-> ;
+----------+-------+---------+
| stevilka | ime | priimek |
+----------+-------+---------+
1	Dejan	Maher
2	Maja	Stojan
3	Petra	Lajh
+----------+-------+---------+
3 rows in set (0.000 sec)
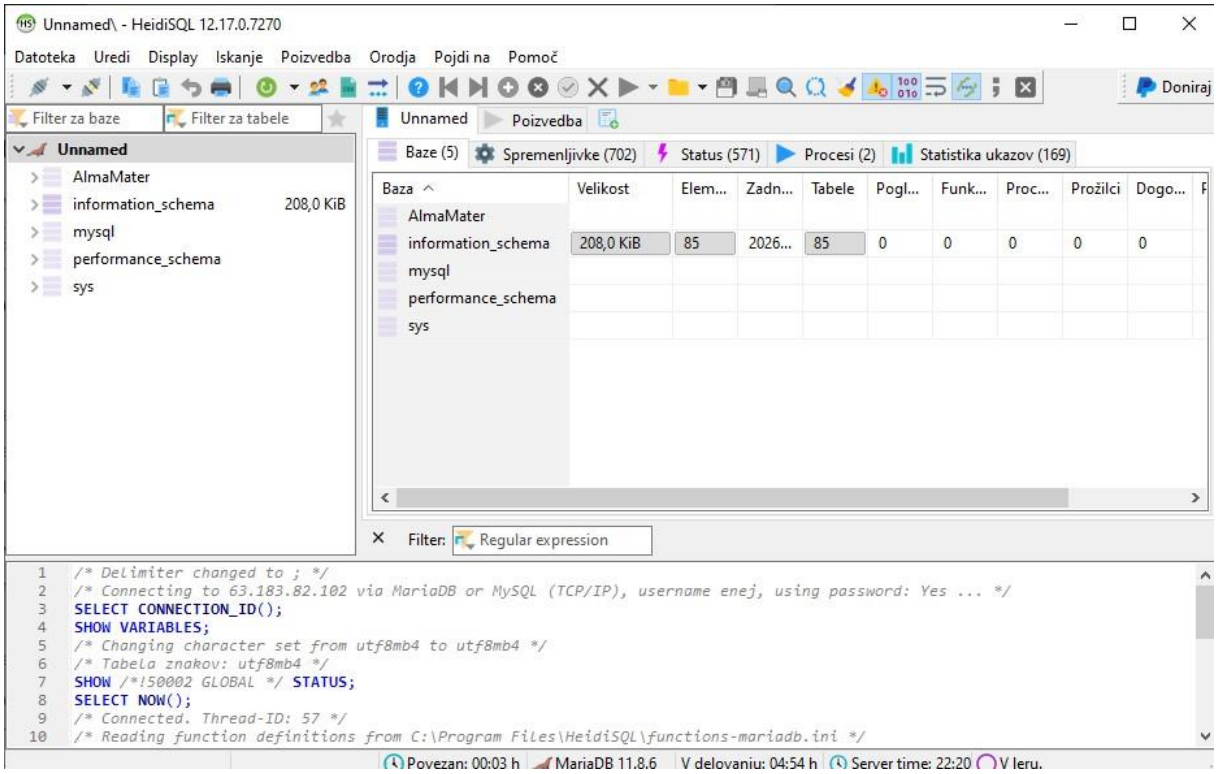
```
MariaDB [(none)]> CREATE USER 'enej'@'%' IDENTIFIED BY 'enej';
Query OK, 0 rows affected (0.001 sec)

MariaDB [(none)]> GRANT ALL ON *.* TO 'enej'@'%';
Query OK, 0 rows affected (0.001 sec)

MariaDB [(none)]> FLUSH PRIVILEGES;
Query OK, 0 rows affected (0.001 sec)

MariaDB [(none)]> sudo nano /etc/mysql/mariadb.conf.d/50-server.cnf
    -> ,
    -> ;
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your MariaDB ser
version for the right syntax to use near 'sudo nano /etc/mysql/mariadb.conf.d/50-server.cnf
,' at line 1
MariaDB [(none)]>
[2]+  Stopped                 mysql -u root -p
admin@ip-10-0-0-239:~$ sudo nano /etc/mysql/mariadb.conf.d/50-server.cnf
admin@ip-10-0-0-239:~$ sudo nano /etc/mysql/mariadb.conf.d/50-server.cnf
admin@ip-10-0-0-239:~$ sudo systemctl restart mariadb
admin@ip-10-0-0-239:~$ sudo nano /etc/mysql/mariadb.conf.d/50-server.cnf
admin@ip-10-0-0-239:~$ mysql -u root -p
Enter password:
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 43
Server version: 11.8.6-MariaDB-0+deb13u1 from Debian -- Please help get to 10k stars at https://github.com/Mari
Server

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]> SELECT user, host FROM mysql.user
    -> WHERE user = 'enej';
+------+------+
| User | Host |
+------+------+
| enej | %    |
+------+------+
1 row in set (0.001 sec)

MariaDB [(none)]>
```