ŠTUDENT: ENEJ VOLMUT

PREDAVANJE 8 IN DOMAČA NALOGA

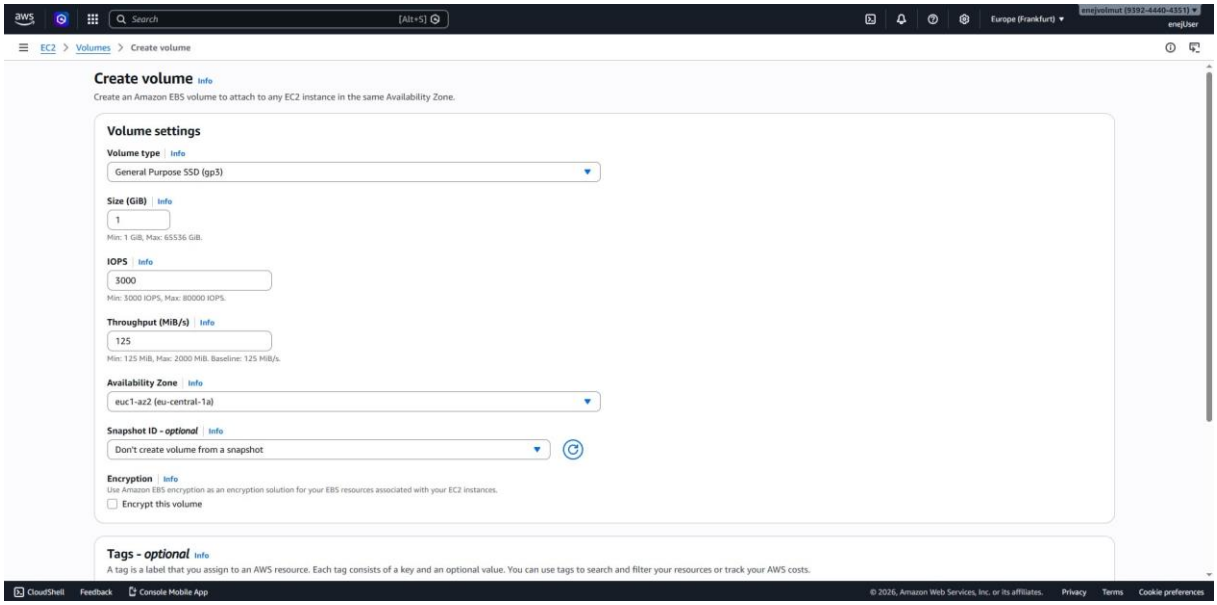

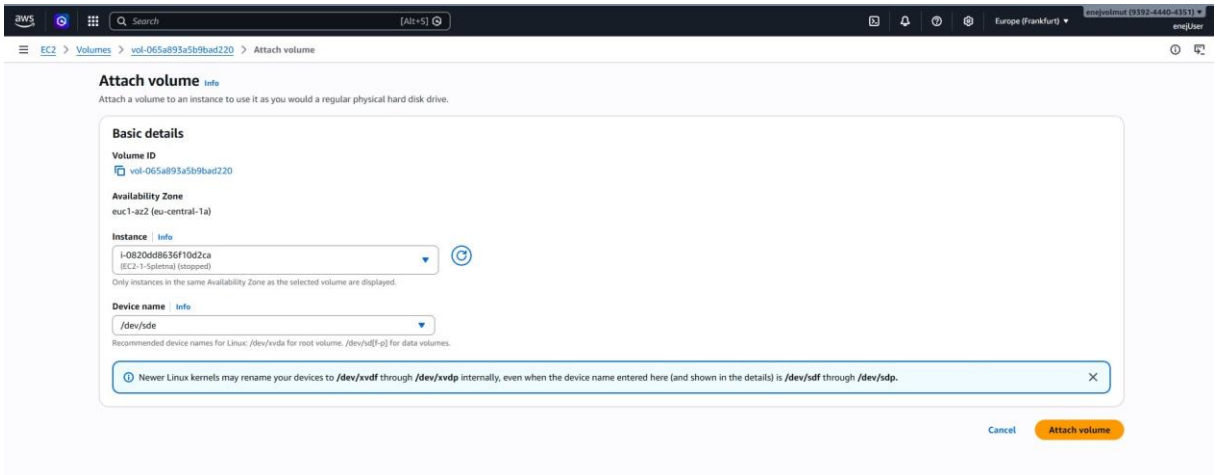

Aurora and RDS > Databases > Create database

Create database Info

Free plan has access to limited features and resources
The free plan limits the features and resources that are available for RDS and Aurora databases. Upgrade your account plan to remove all limitations. Learn more

Upgrade plan

Engine options

Engine type Info

- Aurora (MySQL Compatible)
- Aurora (PostgreSQL Compatible)
- MySQL
- PostgreSQL
- MariaDB
- Oracle
- Microsoft SQL Server
- IBM Db2

Choose a database creation method

- **Full configuration**
  You set all of the configuration options, including ones for availability, security, backups, and maintenance.
- **Easy create**
  Use recommended best-practice configurations. Some configuration options can be changed after the database is created.

Settings

Engine version Info
View the engine versions that support the following database features.

▼ Hide filters

Show only versions that support the Amazon RDS Optimized Writes Info
Amazon RDS Optimized Writes improves write throughput by up to 2x at no additional cost.

Engine version
MariaDB 11.8.6

DB instance identifier Info
Type a name for your DB instance. The name must be unique across all DB instances owned by your AWS account in the current AWS Region.
database-alma-2026
The DB instance identifier is case-insensitive, but is stored as all lowercase (as in "mydbinstance"). Constraints: 1 to 63 alphanumeric characters or hyphens. First character must be a letter. Can't contain two consecutive hyphens. Can't end with a hyphen.

Credentials Settings

Master username Info
Type a login ID for the master user of your DB instance.
admin
1 to 16 alphanumeric characters. The first character must be a letter.

Credentials management
You can use AWS Secrets Manager or manage your master user credentials.

- Managed in AWS Secrets Manager - *most secure*
  RDS generates a password for you and manages it throughout its lifecycle using AWS Secrets Manager.
- **Self managed**
  Create your own password or have RDS create a password that you manage.

☑ Auto generate password
Amazon RDS can generate a password for you, or you can specify your own password.

You can view your credentials after you create your database. Click the 'View credential details' in the database creation banner to view the password.

▼ Additional credentials settings

Database authentication options Info

- **Password authentication**
  Authenticates using database passwords.
- Password and IAM database authentication
  Authenticates using the database password and user credentials through AWS IAM users and roles.

Instance configuration

The DB instance configuration options below are limited to those supported by the engine that you selected above.

DB instance class | Info

▼ Hide filters

Show instance classes that support Amazon RDS Optimized Writes Info
Amazon RDS Optimized Writes improves write throughput by up to 2x at no additional cost.

Include previous generation classes

- Standard classes (includes m classes)
- Memory optimized classes (includes r and x classes)
- **Burstable classes (includes t classes)**

Storage

Storage type Info

Provisioned IOPS SSD (io2) storage volumes are now available.

General Purpose SSD (gp2)
Baseline performance determined by volume size

Allocated storage Info

20 GiB

Allocated storage value must be 20 GiB to 6144 GiB

▼ **Additional storage configuration**

Storage autoscaling | Info

Provides dynamic scaling support for your database's storage based on your application's needs.

☑ Enable storage autoscaling
Enabling this feature will allow the storage to increase after the specified threshold is exceeded.

Maximum storage threshold Info

Charges will apply when your database autoscales to the specified threshold

1000 GiB

Allocated storage value must be 22 GiB to 6144 GiB

Availability & durability

Multi-AZ deployment Info

○ Create a standby instance (recommended for production usage)
Creates a standby in a different Availability Zone (AZ) to provide data redundancy, eliminate I/O freezes, and minimize latency spikes during system backups.

○ Do not create a standby instance

Connectivity Info

Compute resource

Choose whether to set up a connection to a compute resource for this database. Setting up a connection will automatically change connectivity settings so that the compute resource can connect to this database.

◉ Don't connect to an EC2 compute resource
Don't set up a connection to a compute resource for this database. You can manually set up a connection to a compute resource later.

○ Connect to an EC2 compute resource
Set up a connection to an EC2 compute resource for this database.

Network type Info

To use dual-stack mode, make sure that you associate an IPv6 CIDR block with a subnet in the VPC you specify.

◉ IPv4
Your resources can communicate only over the IPv4 addressing protocol.

○ Dual-stack mode
Your resources can communicate over IPv4, IPv6, or both.

Virtual private cloud (VPC) Info

Choose the VPC. The VPC defines the virtual networking environment for this DB instance.

Default VPC (vpc-08e84da09ac2e5ca2)
3 Subnets, 3 Availability Zones

After a database is created, you can't change its VPC. Only VPCs with a corresponding DB subnet group are listed.

ⓘ After a database is created, you can't change its VPC.

DB subnet group Info

Choose the DB subnet group. The DB subnet group defines which subnets and IP ranges the DB instance can use in the VPC that you selected.

default

Public access Info

- Yes
  RDS assigns a public IP address to the database. Amazon EC2 instances and other resources outside of the VPC can connect to your database. Resources inside the VPC can also connect to the database. Choose one or more VPC security groups that specify which resources can connect to the database.
- No
  RDS doesn't assign a public IP address to the database. Only Amazon EC2 instances and other resources inside the VPC can connect to your database. Choose one or more VPC security groups that specify which resources can connect to the database.

VPC security group (firewall) Info

Choose one or more VPC security groups to allow access to your database. Make sure that the security group rules allow the appropriate incoming traffic.

- Choose existing
  Choose existing VPC security groups
- Create new
  Create new VPC security group

New VPC security group name

RDS-sg-alma-2026

Availability Zone Info

eu-central-1a

RDS Proxy

RDS Proxy is a fully managed, highly available database proxy that improves application scalability, resiliency, and security.

- [ ] Create an RDS Proxy Info
  RDS automatically creates an IAM role and a Secrets Manager secret for the proxy. RDS Proxy has additional costs. For more information, see Amazon RDS Proxy pricing.

Certificate authority - *optional* Info

Using a server certificate provides an extra layer of security by validating that the connection is being made to an Amazon database. It does so by checking the server certificate that is automatically installed on all databases that you provision.

rds-ca-rsa2048-g1 (default)
Expiry: May 22, 2061

If you don't select a certificate authority, RDS chooses one for you.

▼ **Additional configuration**

Database port Info

TCP/IP port that the database will use for application connections.

3306

Tags - *optional*

A tag consists of a case-sensitive key-value pair.

No tags associated with the resource.

Add new tag

You can add up to 50 more tags.

Monitoring Info

Choose monitoring tools for this database. Database Insights provides a combined view of Performance Insights and Enhanced Monitoring for your fleet of databases. **Database Insights** pricing is separate from RDS monthly estimates. See Amazon CloudWatch pricing.

- Database Insights - Advanced
  - Retains 15 months of performance history
  - Fleet-level monitoring
  - Integration with CloudWatch Application Signals
- Database Insights - Standard

▼ **Additional monitoring settings**

Initial database name Info

If you do not specify a database name, Amazon RDS does not create a database.

DB parameter group Info

default.mariadb11.8

Option group Info

default:mariadb-11-8

Backup

☑ Enable automated backup
Creates a point-in-time snapshot of your database

Backup retention period Info
The number of days (1-35) for which automatic backups are kept.

1 day

Backup window Info
The daily time range (in UTC) during which RDS takes automated backups.

○ Choose a window
◉ No preference

Backup tags | Info
Copies tags from the source database to the automated backup and snapshots respectively.

☐ Copy tags to automated backup
This is a one-time setting. Future tag modifications need manual updates.

☑ Copy tags to snapshots

Backup replication Info

☐ Enable replication in another AWS Region
Enabling replication automatically creates backups of your DB instance in the selected Region, for disaster recovery, in addition to the current Region.

☑ Enable encryption
Choose to encrypt the given instance. Master key IDs and aliases appear in the list after they have been created using the AWS Key Management Service console. Info

AWS KMS key Info

(default) aws/rds

Account
939244404351

KMS key ID
alias/aws/rds

Maintenance

Auto minor version upgrade Info

☑ Enable auto minor version upgrade
Enabling auto minor version upgrade will automatically upgrade your database minor version. For limitations and more details, see Automatically upgrading the minor engine version documentation.

Maintenance window Info
Select the period you want pending modifications or maintenance applied to the database by Amazon RDS.

○ Choose a window
◉ No preference

☐ Enable deletion protection
Protects the database from being deleted accidentally. While this option is enabled, you can't delete the database.

---

aws | Search [Alt+S] | Europe (Frankfurt) | eneJeolmut (9392-4440-4351) | eneJUser

Aurora and RDS > Databases > database-alma-2026

Aurora and RDS

- Dashboard
- Databases
- Performance insights
- Snapshots
- Exports in Amazon S3
- Automated backups
- Reserved instances
- Proxies
- Subnet groups
- Parameter groups
- Option groups
- Custom engine versions
- Zero-ETL integrations
- Events
- Event subscriptions
- Recommendations 0
- Certificate update

Successfully created database database-alma-2026

RDS has generated your database master password during the database creation and it will be displayed in the connection details. The only way to view your master password is to choose **View connection details** during database creation. You can modify your DB instance to create a new password at any time.

You can use settings from database-alma-2026 to simplify configuration of **suggested database add-ons** while we finish creating your DB for you.

View connection details

database-alma-2026

Modify | Actions

Summary

DB identifier	Status	Role	Engine	Recommendations
database-alma-2026	Backing-up	Instance	MariaDB	
CPU	**Class**	**Current activity**	**Region & AZ**	
0.07%	db.t4g.micro		eu-central-1a	

Connectivity & security | Monitoring | Logs & events | Configuration | Maintenance & backups | Data migrations | Tags | Recommendations

Connect using | Info

- ○ Code snippets — Use when connecting through SDK, APIs, or third-party tools including agents.
- ○ CloudShell — Use for a quick access to AWS CLI that launches directly from the AWS Management Console.
- ◉ Endpoints — Use when connecting through any IDE interface.

Master username
admin

Internet access gateway
Disabled

Port
3306

Endpoint type
Instance endpoint

▼ Additional configurations

Connectivity & security

CloudShell | Feedback | Console Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates. Privacy | Terms | Cookie preferences

DB engine version
Version number of the database engine to be used for this database

11.8.6

DB instance identifier Info
Type a name for your DB instance. The name must be unique across all DB instances owned by your AWS account in the current AWS Region.

database-alma-2026

The DB instance identifier is case-insensitive, but is stored as all lowercase (as in "mydbinstance"). Constraints: 1 to 63 alphanumeric characters or hyphens. First character must be a letter. Can't contain two consecutive hyphens. Can't end with a hyphen.

Credentials management
You can use AWS Secrets Manager or manage your master user credentials.

- Managed in AWS Secrets Manager - *most secure*
  RDS generates a password for you and manages it throughout its lifecycle using AWS Secrets Manager.
- Self managed
  Create your own password or have RDS create a password that you manage.

☐ Auto generate password
Amazon RDS can generate a password for you, or you can specify your own password.

Master password | Info

••••••••••••

Password strength Very strong

Minimum constraints: At least 8 printable ASCII characters. Can't contain any of the following symbols: / ' " @

Confirm master password | Info

••••••••••••

▼ **Additional credentials settings**

Database authentication options Info

- Password authentication
  Authenticates using database passwords.
- Password and IAM database authentication
  Authenticates using the database password and user credentials through AWS IAM users and roles.

---

aws | RDS | Ask Amazon Q | Europe (Frankfurt) | enejwolmut (9592-4440-4351) | enejUser

VPC > Security Groups > sg-08298913f8e42077f - RDS-sg-alma-2026 > Edit inbound rules

Edit inbound rules Info

Inbound rules control the incoming traffic that's allowed to reach the instance.

Inbound rules Info

Security group rule ID	Type Info	Protocol Info	Port range Info	Source Info		Description - optional Info	
sgr-0bfcbdd8d41f4a5f9	MYSQL/Aurora	TCP	3306	Custom	sg-0a24af40e5426ecaf		Delete
sgr-0c68c0ca09745f4d5	MYSQL/Aurora	TCP	3306	Custom	86.58.120.63/32		Delete

Add rule

Cancel | Preview changes | Save rules

admin@ip-172-31-29-152: ~

```
login as: admin
Authenticating with public key "alma2026dn"
Linux ip-172-31-29-152 6.12.74+deb13+1-cloud-amd64 #1 SMP PREEMPT_DYNAMIC Debian
 6.12.74-2 (2026-03-08) x86_64

The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
admin@ip-172-31-29-152:~$ sudo apt install mariadb-client -y
Error: Unable to locate package mariadb-client
admin@ip-172-31-29-152:~$ sudo yum install mariadb105 -y
sudo: yum: command not found
admin@ip-172-31-29-152:~$ sudo apt update -y
Get:1 file:/etc/apt/mirrors/debian.list Mirrorlist [38 B]
Get:2 file:/etc/apt/mirrors/debian-security.list Mirrorlist [47 B]
Get:3 https://cdn-aws.deb.debian.org/debian trixie InRelease [140 kB]
Get:4 https://cdn-aws.deb.debian.org/debian trixie-updates InRelease [47.3 kB]
Get:5 https://cdn-aws.deb.debian.org/debian trixie-backports InRelease [54.0 kB]
Get:6 https://cdn-aws.deb.debian.org/debian-security trixie-security InRelease [
43.4 kB]
Get:7 https://cdn-aws.deb.debian.org/debian trixie/main Sources [10.5 MB]
Get:8 https://cdn-aws.deb.debian.org/debian trixie/main amd64 Packages [9671 kB]
Get:9 https://cdn-aws.deb.debian.org/debian trixie/main Translation-en [6484 kB]
Get:10 https://cdn-aws.deb.debian.org/debian trixie-updates/main Sources [2788 B
]
Get:11 https://cdn-aws.deb.debian.org/debian trixie-updates/main amd64 Packages
[5412 B]
Get:12 https://cdn-aws.deb.debian.org/debian trixie-updates/main Translation-en
[4096 B]
Get:13 https://cdn-aws.deb.debian.org/debian trixie-backports/main Sources [192
kB]
Get:14 https://cdn-aws.deb.debian.org/debian trixie-backports/main amd64 Package
s [216 kB]
Get:15 https://cdn-aws.deb.debian.org/debian trixie-backports/main Translation-e
n [162 kB]
Get:16 https://cdn-aws.deb.debian.org/debian-security trixie-security/main Sourc
es [130 kB]
Get:17 https://cdn-aws.deb.debian.org/debian-security trixie-security/main amd64
 Packages [125 kB]
Get:18 https://cdn-aws.deb.debian.org/debian-security trixie-security/main Trans
lation-en [78.8 kB]
Fetched 27.9 MB in 2s (15.4 MB/s)
11 packages can be upgraded. Run 'apt list --upgradable' to see them.
admin@ip-172-31-29-152:~$ sudo apt install mariadb-client -y
Installing:
  mariadb-client

Installing dependencies:
  libconfig-inifiles-perl  libncurses6           mariadb-common
  libdbd-mariadb-perl      libpcre2-posix3       mysql-common
  libdbi-perl              libperl5.40           perl
  libgdbm-compat4t64       libterm-readkey-perl  perl-modules-5.40
  libmariadb3              mariadb-client-core

Suggested packages:
  libclone-perl       libsql-statement-perl      | libterm-readline-perl-perl
  libmldbm-perl       perl-doc                   make
  libnet-daemon-perl  libterm-readline-gnu-perl  libtap-harness-archive-perl

Summary:
```

admin@ip-172-31-29-152: ~

```
Preparing to unpack .../14-mariadb-client_1%3a11.8.6-0+deb13u1_amd64.deb ...
Unpacking mariadb-client (1:11.8.6-0+deb13u1) ...
Setting up libconfig-inifiles-perl (3.000003-3) ...
Setting up mysql-common (5.8+1.1.1) ...
update-alternatives: using /etc/mysql/my.cnf.fallback to provide /etc/mysql/my.c
nf (my.cnf) in auto mode
Setting up libgdbm-compat4t64:amd64 (1.24-2) ...
Setting up mariadb-common (1:11.8.6-0+deb13u1) ...
update-alternatives: using /etc/mysql/mariadb.cnf to provide /etc/mysql/my.cnf (
my.cnf) in auto mode
Setting up libncurses6:amd64 (6.5+20250216-2) ...
Setting up libmariadb3:amd64 (1:11.8.6-0+deb13u1) ...
Setting up libpcre2-posix3:amd64 (10.46-1~deb13u1) ...
Setting up perl-modules-5.40 (5.40.1-6) ...
Setting up mariadb-client-core (1:11.8.6-0+deb13u1) ...
Setting up libperl5.40:amd64 (5.40.1-6) ...
Setting up perl (5.40.1-6) ...
Setting up libterm-readkey-perl (2.38-2+b4) ...
Setting up libdbi-perl:amd64 (1.647-1) ...
Setting up mariadb-client (1:11.8.6-0+deb13u1) ...
Setting up libdbd-mariadb-perl (1.22-1+b4) ...
Processing triggers for man-db (2.13.1-1) ...
Processing triggers for libc-bin (2.41-12+deb13u2) ...
admin@ip-172-31-29-152:~$ mariadb -h database-alma-2026.c92qqoacubrx.eu-central-
1.rds.amazonaws.com admin -p
Enter password:
ERROR 2002 (HY000): Can't connect to server on 'database-alma-2026.c92qqoacubrx.
eu-central-1.rds.amazonaws.com' (115)
admin@ip-172-31-29-152:~$ mariadb -h database-alma-2026.c92qqoacubrx.eu-central-
1.rds.amazonaws.com admin -p
Enter password:
ERROR 1049 (42000): Unknown database 'admin'
admin@ip-172-31-29-152:~$ mariadb -h database-alma-2026.c92qqoacubrx.eu-central-
1.rds.amazonaws.com admin
ERROR 2026 (HY000): TLS/SSL error: unable to get local issuer certificate
admin@ip-172-31-29-152:~$ mariadb -h database-alma-2026.c92qqoacubrx.eu-central-
1.rds.amazonaws.com admin -p
Enter password:
ERROR 1049 (42000): Unknown database 'admin'
admin@ip-172-31-29-152:~$ mariadb -h database-alma-2026.c92qqoacubrx.eu-central-
1.rds.amazonaws.com -u admin -p
Enter password:
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 128
Server version: 11.8.6-MariaDB-log managed by https://aws.amazon.com/rds/

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]> SHOW DATABASES;
+--------------------+
| Database           |
+--------------------+
| information_schema |
| innodb             |
| mysql              |
| performance_schema |
| sys                |
+--------------------+
5 rows in set (0.007 sec)

MariaDB [(none)]>
```

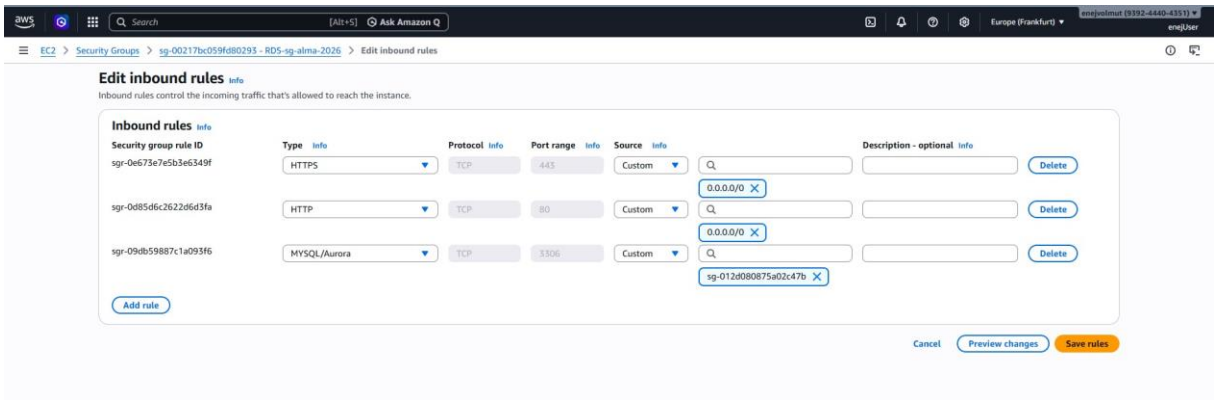
aws
Search
[Alt+S]
Ask Amazon Q
Europe (Frankfurt)
enejuser
EC2 > Security Groups > sg-00217bc059fd80293 - RDS-sg-alma-2026 > Edit inbound rules
Edit inbound rules Info
Inbound rules control the incoming traffic that's allowed to reach the instance.
Inbound rules Info
Security group rule ID
Type Info
Protocol Info
Port range Info
Source Info
Description - optional Info
sgr-0e673e7e5b3e6349f
HTTPS
TCP
443
Custom
0.0.0.0/0
Delete
sgr-0d85d6c2622d6d3fa
HTTP
TCP
80
Custom
0.0.0.0/0
Delete
sgr-09db59887c1a093f6
MYSQL/Aurora
TCP
3306
Custom
sg-012d080875a02c47b
Delete
Add rule
Cancel
Preview changes
Save rules

admin@ip-172-31-29-152: ~

```
Hit:4 https://cdn-aws.deb.debian.org/debian trixie-updates InRelease
Hit:5 https://cdn-aws.deb.debian.org/debian trixie-backports InRelease
Hit:6 https://cdn-aws.deb.debian.org/debian-security trixie-security InRelease
11 packages can be upgraded. Run 'apt list --upgradable' to see them.
apache2 is already the newest version (2.4.66-1~deb13u2).
php is already the newest version (2:8.4+96).
php-mysql is already the newest version (2:8.4+96).
Summary:
  Upgrading: 0, Installing: 0, Removing: 0, Not Upgrading: 11
admin@ip-172-31-29-152:~$ sudo nano /var/www/html/index.php
admin@ip-172-31-29-152:~$ sudo nano /var/www/html/index.php
admin@ip-172-31-29-152:~$ sudo systemctl start apache2
admin@ip-172-31-29-152:~$ sudo apt update && sudo apt install apache2 php php-mysql -y
Get:1 file:/etc/apt/mirrors/debian.list Mirrorlist [38 B]
Get:2 file:/etc/apt/mirrors/debian-security.list Mirrorlist [47 B]
Hit:3 https://cdn-aws.deb.debian.org/debian trixie InRelease
Hit:4 https://cdn-aws.deb.debian.org/debian trixie-updates InRelease
Hit:5 https://cdn-aws.deb.debian.org/debian trixie-backports InRelease
Get:6 https://cdn-aws.deb.debian.org/debian-security trixie-security InRelease [43.4 kB]
Fetched 43.4 kB in 0s (624 kB/s)
11 packages can be upgraded. Run 'apt list --upgradable' to see them.
apache2 is already the newest version (2.4.66-1~deb13u2).
php is already the newest version (2:8.4+96).
php-mysql is already the newest version (2:8.4+96).
Summary:
  Upgrading: 0, Installing: 0, Removing: 0, Not Upgrading: 11
admin@ip-172-31-29-152:~$ sudo systemctl restart apache2
admin@ip-172-31-29-152:~$ ls -l /var/www/html/index.php
-rw-r--r-- 1 root root 354 Apr 21 15:30 /var/www/html/index.php
admin@ip-172-31-29-152:~$ sudo tail -f /var/log/apache2/error.log
[Tue Apr 21 15:27:57.647708 2026] [mpm_prefork:notice] [pid 8667:tid 8667] AH00163: Apache/2.4.66 (D
ebian) configured -- resuming normal operations
[Tue Apr 21 15:27:57.647752 2026] [core:notice] [pid 8667:tid 8667] AH00094: Command line: '/usr/sbi
n/apache2'
[Tue Apr 21 15:49:02.742033 2026] [mpm_prefork:notice] [pid 8667:tid 8667] AH00170: caught SIGWINCH,
 shutting down gracefully
[Tue Apr 21 15:49:02.810271 2026] [mpm_prefork:notice] [pid 8943:tid 8943] AH00163: Apache/2.4.66 (D
ebian) configured -- resuming normal operations
[Tue Apr 21 15:49:02.810307 2026] [core:notice] [pid 8943:tid 8943] AH00094: Command line: '/usr/sbi
n/apache2'
[Tue Apr 21 15:50:57.582472 2026] [php:error] [pid 8946:tid 8946] [client 86.58.120.63:61255] PHP Fa
tal error:  Uncaught mysqli_sql_exception: Connections using insecure transport are prohibited while
 --require_secure_transport=ON. in /var/www/html/index.php:7\nStack trace:\n#0 /var/www/html/index.p
hp(7): mysqli_connect()\n#1 {main}\n  thrown in /var/www/html/index.php on line 7
^C
admin@ip-172-31-29-152:~$ sudo apt update && sudo apt install php-mysql -y
Get:1 file:/etc/apt/mirrors/debian.list Mirrorlist [38 B]
Get:2 file:/etc/apt/mirrors/debian-security.list Mirrorlist [47 B]
Hit:3 https://cdn-aws.deb.debian.org/debian trixie InRelease
Hit:4 https://cdn-aws.deb.debian.org/debian trixie-updates InRelease
Hit:5 https://cdn-aws.deb.debian.org/debian trixie-backports InRelease
Hit:6 https://cdn-aws.deb.debian.org/debian-security trixie-security InRelease
11 packages can be upgraded. Run 'apt list --upgradable' to see them.
php-mysql is already the newest version (2:8.4+96).
Summary:
  Upgrading: 0, Installing: 0, Removing: 0, Not Upgrading: 11
admin@ip-172-31-29-152:~$ sudo systemctl restart apache2
admin@ip-172-31-29-152:~$ sudo nano /var/www/html/index.php
admin@ip-172-31-29-152:~$ udo nano /var/www/html/index.php
-bash: udo: command not found
admin@ip-172-31-29-152:~$ sudo nano /var/www/html/index.php
admin@ip-172-31-29-152:~$ sudo nano /var/www/html/index.php
admin@ip-172-31-29-152:~$
```

Ni varno 3.64.250.84/index.php

STRAN PRIKAZANA