

Building Cloud Native Applications: Hotel Reservation System

Overview

In this tutorial, we will guide you through the process of building a cloud-native hotel reservation system. This system comprises two primary components:

1. Hotel Reservation Service developed using Java Spring Boot, Python, and Ballerina.
2. Hotel Reservation Web Application developed using ReactJS.

Prerequisites

Before beginning, ensure you have the following prerequisites set up:

- A GitHub account (instructions for forking the code repository will be provided during the session).
- Git installed on your workstation.
- A recent version of Google Chrome or Mozilla Firefox.
- Ballerina v2201.8.4 installed on your workstation. [Ballerina Swan Lake](#) [Ballerina VS Code extension](#)
- Python 3.x or above with Kafka and Azure communication modules installed
- Microsoft Visual Studio (VSCode) with the WSO2 Ballerina plugin. [Visual Studio Code](#)
- Kafka broker (you may use confluent SaaS based broker free tire) <https://confluent.cloud/>
- Postman and curl (or any HTTP client) installed on your workstation.
- Azure communication service keys (assistance with connection strings and keys will be provided during the session). <https://azure.microsoft.com/en-us/products/communication-services>
- A Choreo account.

Business Scenario

The objective is to construct a reservation system for a luxury hotel that enables users to search for rooms, make reservations, and manage their bookings.

High-Level Steps

1. Develop the HTTP service using Spring Boot (refer to the code repository), Python services for email communication, and Ballerina for Backend for Frontend (BFF) services implementation using GraphQL.

2. Push the code to your GitHub account.
3. Deploy the cloud-native application on Choreo, including both services and the web application.

Detailed Steps

1. Develop the GraphQL Service for Rooms Search API (Experience API)

- Implement Ballerina GraphQL that will be utilized for the room search API.

2. Develop Java Spring Boot HTTP Service (Domain APIs)

Using Java Spring Boot, develop an HTTP service that manages the backend logic for room searches, reservations, and management. This service should include endpoints for:

- Making reservations: Handle POST requests with user data and return a confirmation with a unique reference number.
- Listing reservations: Allow users to retrieve their booking details.
- Updating reservations: Enable modifications to existing bookings.
- Canceling reservations: Allow users to cancel their bookings.


Example of a simple Ballerina service for room reservation:

3. Develop Python HTTP for Email Notification (Event based API)

- The Python service will be designed to send email notifications related to user reservation activities. It'll listen to the reservation update events at the Kafka broker topic. Based on the event. This service will interact with Azure communication services to manage the dispatch of emails.

Project Objective:

Develop a reservation platform for a premium hotel establishment.

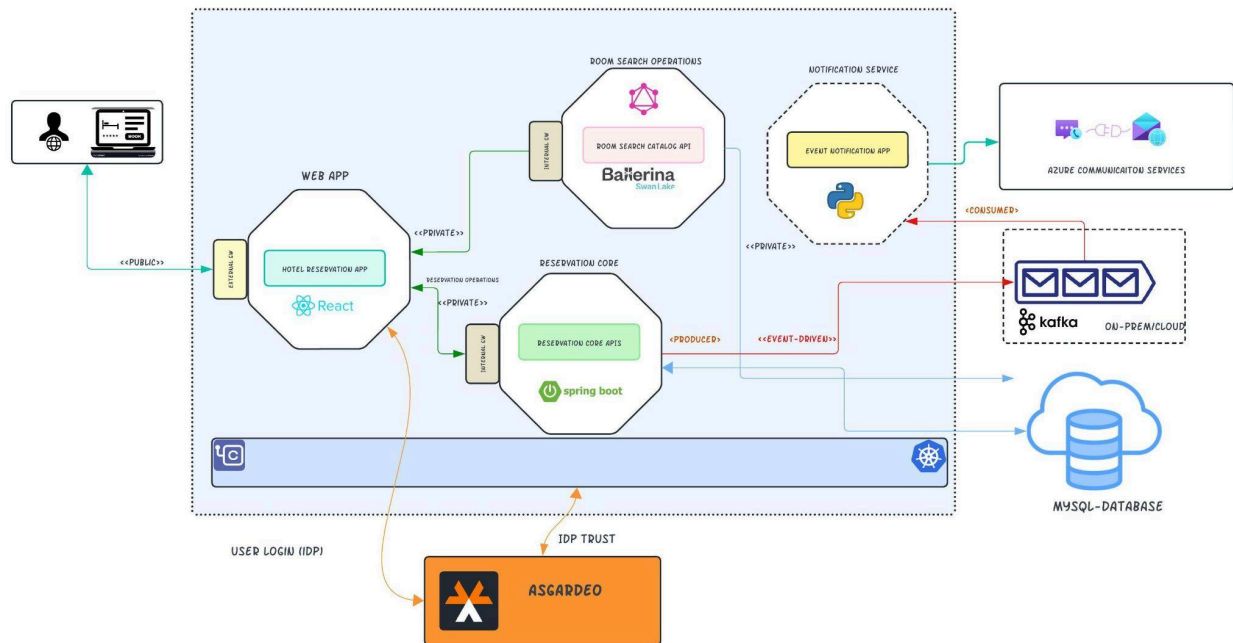

Proposed Solution:

Create an interactive web application that facilitates room bookings for hotel guests. The application will be equipped with the following functionalities:

Room Search Feature:

- Guests will have the ability to search for available rooms by entering their desired check-in and check-out dates, and they can refine their search based on the number of occupants.
- The search output will display various room categories, such as single, double, and so on.
- Accompanying each room type in the search results will be a "Reserve" button, streamlining the booking process.

Room Reservation Process:

- For room booking, guests are required to provide their personal details, including their full name, contact number, and email address.

- The reservation form will enable the "Reserve" button once all mandatory fields are completed correctly. Following a successful reservation, the system will generate a unique reference number for the guest to note down.

Reservation Management:

- Guests can view their current reservations after signing into their account.
- Within their reservation list, guests will have the option to either amend the details of their booking or proceed with cancellation.

Reservation Modification:

- Guests are granted the autonomy to alter any aspect of their existing reservation.

Reservation Cancellation:

- Guests retain the right to revoke their reservations at their convenience, with a clear and accessible cancellation feature within the booking system

Project Setup Guidance

Open project locally

- Fork the GitHub Repo - <https://github.com/dushansachinda/hotel-reservation-demo-with-v2/tree/master>. Important: Make sure you untick the option "Copy the main branch only".
- Open the hotel-reservation-demo directory using Visual Studio Code. First Click on **File > Open** and then select the hotel-reservation-demo folder and click **Open**.

Deploying the Hotel Reservation App using Choreo

Step 1: Sign Up and Login to Choreo

- Sign Up to Choreo by the <https://choreo.dev/> URL
- Once you log in to Choreo for the first time, you will be asked to provide an organization

handle name. Provide a handle name and click Create.

Step 2: Create a new Project

- Click organization card in the top menu
- Click Create Project card
- Add the fields shown in the table

FieldName	Field Value
Name	Luxury Hotel
Project Type	Multi Repository

Step 3: Setup Database

- Click organization
- Navigate to Dependencies tab
- Select MySQL
- Select Digital Ocean or preferred cloud vendor
- Click Create Database

← Back to database server list

STEP 1
Select Database Type

STEP 2
Select service plan

Create Database Server

Select Cloud Provider

Digital Ocean

Google Cloud Platform

aws Amazon Web Services

Microsoft Azure

Select Region

Europe United States

Select Service Plan

Hobbyist
Nodes: 1
RAM: 1 GB
CPU: 1 vCPU
Storage: 8 GB
No automated backups.
For development use only.
\$0.03 / hour

Startup 4
Nodes: 1
RAM: 4 GB
CPU: 2 vCPU
Storage: 80 GB
Backups every 24 hours.
Retained for 3 days.
\$0.10 / hour

Startup 8
Nodes: 1
RAM: 8 GB
CPU: 4 vCPU
Storage: 175 GB
Backups every 24 hours.
Retained for 3 days.
\$0.20 / hour

Startup 16
Nodes: 1
RAM: 16 GB
CPU: 6 vCPU
Storage: 350 GB
Backups every 24 hours.
Retained for 3 days.
\$0.34 / hour

- Once Database create, copy database URL, port, username, password and keep it somewhere
- Using any DB client login to the database.
- Navigate to <<**resources**>> folder.

- Run schema.sql
- Run data.sql

Step 3: Setup Kafka Broker

- You may setup the Kafka broker, this is an independent task, for the tutorial we would recommend you to use Confluent free tire. <https://confluent.cloud/>. You may need to obtain following information
 - KAFKA_USERNAME=xx (api key)
 - KAFKA_PASSWORD=xx (api secret)
 - BOOTSTRAP_SERVERS=xx
 - SECURITY_PROTOCOL=SASL_SSL (default)
 - SASL_MECHANISMS=PLAIN (default)
 - SESSION_TIMEOUT_MS=45000(default)
 - TOPIC_NAME=xx (default : notifications)

Step 4: Create and Deploy a Python notification event handler - Event Notification Service

- Select create EventHandler
- Expand the select your organization section and click add
- Keep the default selected option for all repositories. Then click install and Authorize
- Select hotel-reservation-demo repository and and choose the branch
- Select buildpack Python
- Select <<[notification-event-consumer](#)>> directory
- Select Python language version
- Select create
- Navigate to Build card
 - Click build latest which trigger building the image from the latest commit
- Once build is successfully completed under deployment provide following environment variable refer section under ref **Appendix [2]** on how to obtain connection string and azure communication sender address
 - AZURE_COMM_SERVICES_CONNECTION_STRING
 - AZURE_COMM_SERVICES_SENDER_ADDRESS
- Setup Kafka configuration under environment variable (consumer service)
 - KAFKA_USERNAME=xx (api key)
 - KAFKA_PASSWORD=xx (api secret)
 - BOOTSTRAP_SERVERS=xx

- SECURITY_PROTOCOL=SASL_SSL (default)
 - SASL_MECHANISMS=PLAIN (default)
 - SESSION_TIMEOUT_MS=45000(default)
 - TOPIC_NAME=xx (default : notifications)
- Deploy the service

Step 5: Create and Deploy a SpringBoot Services (reservation core services)

- Select Services
- Provide the name for the service e.g

FieldName	Field Value
Name	Hotel Reservation Core Service

- Expand the select your organization section and click add
- Keep the default selected option for all repositories. Then click install and Authorize
- Select hotel-reservation-demo repository and and choose the branch
- Select buildpack Java
- Select **<<service-java>>** project
- Select JDK 17 from language version
- Click Create
- Navigate to Build card
 - Click build latest which trigger building the image from the latest commit
- Once build is successfully completed under deployment provide following environment variable
 - DB_HOST
 - DB_NAME
 - DB_PASSWORD
 - DB_PORT
 - DB_USERNAME
 - //Producer
 - KAFKA_USERNAME=xx (api key)
 - KAFKA_PASSWORD=xx (api secret)
 - BOOTSTRAP_SERVERS=xx
 - SECURITY_PROTOCOL=SASL_SSL (default)

- SASL_MECHANISMS=PLAIN (default)
 - SESSION_TIMEOUT_MS=45000(default)
 - TOPIC_NAME=xx (default : notifications)
- Click and deploy service

Step 6: Create and Deploy a Ballerina Services (graphql based room search service)

- Expand the select your organization section and click add
- Keep the default selected option for all repositories. Then click install and Authorize
- Select hotel-reservation-demo repository and and choose the branch
- Select buildpack Ballerina
- Select <<**service-graphql**>> directory
- Select Ballerina language version
- Select create
- Navigate to Build card
 - Click build latest which trigger building the image from the latest commit
- Once build is successfully completed under deployment provide following environment variable as in follows (obtained from step-2)
 - DB_HOST
 - DB_NAME
 - DB_PASSWORD
 - DB_PORT
 - DB_USERNAME
- Deploy API

Step 7 - Deploy the Hotel Reservation Web Application

- Click create.
- Select the Web Application card
- Provide the Name for the Web Application

FieldName	Field Value
-----------	-------------

Name	Hotel Reservation Web Application
------	-----------------------------------

- Click on the Authorize with GitHub
- Select the hotel-reservation-demo repository and select the main branch
 - Select React as the buildpack and set the following parameters

Field	Field Value
BuildPack	Ract
Project Director	/webapp
Build Command	/npm run build
Build Path	/build
Node Version	20.11.0

- Click and expand the Dependencies on the left navigation menu and click Connection tab
- Select the Hotel Reservation Service that was created at <<step-5 and step-6>>
- Provide a name and the description
- Then click create
- Copy the serverURL for later usage
- Under the development tab, select Choreo built-in identity provider or you may select Asgardeo as IDP. If you select Choreo inbuilt Identity provider, expand the advanced section and select Code and Refresh grant types. Then add the Default callback URLs. Then generate keys

Authentication Keys

Deployment Tracks

URL Settings

Development

Production

Identity Provider

Select an Identity Provider to configure

Asgardeo - hahack23

Client ID

POImI0uqKrGZTTWxQghvxSW8Bzka

Client Secret

Client Secret

Note: Required only for Choreo Managed Authentication.

The client secret you specify will not be visible after you add it.

Add Keys

When Choreo manages your application's authentication, make sure to include your application's Client ID and Client Secret on the left. Additionally, configure your application using the provided **OIDC App Configuration** information below.

OIDC App Configuration

Configure your Identity Provider with the following:

Redirect URLs

https://b2d6fb02-82ad-461f-9dc3-8ae5fd7c3a87e1-us-east-azure.choreoapps.dev/auth

https://b2d6fb02-82ad-461f-9dc3-8ae5fd7c3a87e1-us-east-azure.choreoapps.dev/auth

Grant Types

Authorization Code

Refresh

Refresh Token Expiry

For a seamless experience, the refresh token expiry time of your application should match the session timeout configured in the Choreo Managed Authentication setting

ASGARDEO Console

Organization
hahack23

Home

Insights

Applications

Connections

API Resources

Branding

User Management

User Attributes & Stores

Organizations

Login & Registration

Email & SMS

Logs

Administrators

Events

Given below are the OAuth2.0/OpenID Connect settings for your application. [Learn More](#)

Read through our [documentation](#) to learn more about using OAuth2.0/OpenID Connect protocol to implement login in your applications.

Client ID

POImI0uqKrGZTTWxQghvxSW8Bzka

Client secret

.....

Regenerate

Allowed grant types*

☒ Code

☒ Client Credential

☒ Refresh Token

☐ Implicit

☐ Password

☐ Token Exchange

This will determine how the application communicates with the token service.

Authorized redirect URLs*

https://myapp.io/login

https://localhost:10000/auth/logout/callback

https://localhost:10000/auth/login/callback

https://wsa2.com

https://b2d6fb02-82ad-461f-9dc3-8ae5fd7c3a87e1-us-east-azure.choreoapps.dev/auth/login/callback

https://84af8487-cfdd-4a48-8cb7-262424f87a6b.e1-us-east-azure.choreoapps.dev/auth/logout/callback

https://84af8487-cfdd-4a48-8cb7-262424f87a6b.e1-us-east-azure.choreoapps.dev/auth/login/callback

http://localhost:3000

- Click Deploy on the left navigation menu. Click configure Deploy in the deployment page

```
window.configs = {  
  apiUrl: '<<spring boot reservation core service url>>',  
  catalogUrl: '<<ballerina graphql url>>',  
};
```

Step 2/2 Authentication

Authentication Settings

Managed Authentication with Choreo ☒

[Configuration Guide](#)

Post Login Path

Post Logout Path

Error Path

Advanced Configurations

Back Deploy

- Deploy the web application. If app deployed successfully, you may able to to obtain the URL to access the homepage of the web application

- Navigate to graph **service-graphql**
 - Type **bal run**
- Open another terminal navigate to **<<notification-api-event>>** set environment variable
 - `export AZURE_COMM_SERVICES_CONNECTION_STRING="xxx"`
 - `export AZURE_COMM_SERVICES_SENDER_ADDRESS=xxx`
 - `export KAFKA_USERNAME=xx`
 - `export KAFKA_PASSWORD=xx+xx`
 - `export BOOTSTRAP_SERVERS="xx.gcp.confluent.cloud:9092"`
 - `export SECURITY_PROTOCOL="SASL_SSL"`
 - `export SASL_MECHANISMS="PLAIN"`
 - `export SESSION_TIMEOUT_MS="45000"`
 - `export TOPIC_NAME="notifications"`
 -
 - Run command **flask run --host=0.0.0.0 --port=8081**
- Open another terminal navigate to **<<java-services>>**
 - Setup environment variable #1
 - Build maven project, navigate to target folder
 - Then execute following command
 - `java -jar luxury-hotels-1.0.1.jar`
- Open another terminal navigate to webapp folder (run following command)
 - `npm install`
 - `npm run`
- IMPORTANT: we should use the Choreo configured IDP for the webapp to authenticate successfully. Therefore first navigate to the choreo hosted web application deploy section
 - Enable local deployment
 - Add Callback URLs to the Asgardeo application created for user authentication
 - Copy `"npx @choreo/proxy -p [APP_PORT] -f 10000 -u https://xxxx.e1-us-east-azure.choreoapps.dev"`
 - Replace port with 3000
 - Run npx command above

feature is enabled by default for all types of HTTP-based services and web applications deployed in the Cloud data

Deployed 2 hours ago

Deployment Status Active

Image Deployment History

graphql BFF catalog service in...
by dushansachinda
14ad223bf, 17 hours ago
Image Ref: hotel-res-web:8f13...

Web App URL
<https://b2d6fb02-82ad-461f-9dc...>

Scale to Zero Enabled

Authentication

Managed Authentication Enabled

Local Development Enabled

Authentication Keys

Not yet Deployed

Local Development

Local development allows a web app running on a local machine to use Choreo's Managed Authentication features.

[Read More](#)

1. Configure Allowed Redirect URIs

Configure the following redirect URIs in the Identity Provider's OAuth2 Application

- <https://localhost:10000/auth/login/callback>
- <https://localhost:10000/auth/logout/callback>

2. Run local development proxy server

Replace [APP_PORT] with the port on which your application is running and run the command in the terminal

```
npx @choreo/proxy -p [APP_PORT] -f 10000 -u https://b2d6fb02-82
```

3. Access the application

<https://localhost:10000>

- Access the web application via <https://localhost:10000>
- Continue your development efforts

Inspector Console Debugger Network Style Editor Performance Memory Storage Accessibility Application Adblock Plus

Status	Method	D...	File	Initiator	Type	Transferred	Size	Headers	Cookies	Request	Response	Timings	Stack Trace
200	OPTIONS	roomapi		xhr	plain	247 B	0 B			Filter Request Parameters			
200	POST	roomapi		bundle.js:78007 (xhr)	json	336 B	1...			Filter Request Parameters	JSON		

query: "in query MyQuery(\$checkin: String!, \$checkout: String!, \$guestCapacity: Int!) {
 roomTypes(checkinDate: \$checkin, checkoutDate: \$checkout, guestCapacity:
 \$guestCapacity) {
 id
 name
 price
 }
}"

variables: {
 checkin: "2024-04-26T18:05:17.764Z"
 checkout: "2024-04-26T18:05:17.764Z"
 guestCapacity: 2
}

Appendix

[1]

- Reservation core services (graphql)

http://localhost:9090/roomgql

Resource	Path	Action	Query Param	Path Param	Request	Respons
Get all available room types	/roomgql		string checking Date String checkout Date Int guestCapacity		query RoomTypes{ roomTypes(checkinDate: "2024-04-26T15:00:38.122Z" checkoutDate: "2024-04-26T16:00:38.122Z" guestCapacity: 1){ id guestCapacity price name } }	"data":{ "roomTypes": [{ "id": 0, "guestCapacity": 1, "price": 80, "name": "Single" }, { "id": 1, "guestCapacity": 2, "price": 120, "name": "Double" },

						<pre>{ "id": 3, "guestCapacity": 4, "price": 300, "name": "Suite" }]</pre>
--	--	--	--	--	--	---

- Reservation core services (spring boot services)

<http://localhost:8080/reservations>

Resource	Path	Action	Query Param	Path Param	Request	Respons
Create new reservation		POST			<pre>{ "checkinDate": "2024-02-19T14:00:00Z", "checkoutDate": "2024-02-20T10:00:00Z", "rate": 100, "user": { "id": "123", </pre>	<pre>{ "id": "1", "checkinDate": "2024-02-19T14:00:00Z", "checkoutDate": "2024-02-20T10:00:00Z", "user": { "id": "123", "name": </pre>

					"name": "waruna", "email": "waruna@someemail.com", "mobileNumber": "987" }, "roomType": "Family" }	"waruna", "email": "waruna@someemail.com", "mobileNumber": "987" }, "room": { "number": 201, "type": { "id": 0, "name": "Double", "guestCapacity": 2, "price": 100 }}
Update existing reservation		PUT		reservation_id	{ "checkinDate": "2024-02-20T14:00:00Z", "checkoutDate": "2024-02-21T10:00:00Z" }	{ "id": "1", "checkinDate": "2024-02-19T14:00:00Z", "checkoutDate": "2024-02-21T10:00:00Z", "user": { "id": "123", "name": "waruna", "email": "waruna@someemail.com", "mobileNumber": "987" }, "room": {

						<pre> "number": 201, "type": { "id": 0, "name": "Double", "guestCapacity": 2, "price": 100 }} </pre>
Remove a reservation		DELETE		reservation_id		
Retrieve all reservation for user	/users/	GET		userID		<pre> [{ "checkinDate": "2024-02-19T14:00:00Z", "checkoutDate": "2024-02-20T10:00:00Z", "rate": 120, "user": { "id": "123", "name": "waruna", "email": "waruna@someemail.com", "mobileNumber": "987" }, "roomType": "Family" }, </pre>

						<pre>{ "checkinDate": "2024-02-23T14:00:00Z", "checkoutDate": "2024-02-24T10:00:00Z", "rate": 100, "user": { "id": "123", "name": "waruna", "email": "waruna@someemail.com", "mobileNumber": "987" }, "roomType": "Double" }</pre>
--	--	--	--	--	--	--

- Notification services (python)

<http://localhost:8081/notifications>

Resource	Path	Action	Query Param	Path Param	Request	Response
send-email		POST			<pre>{ "body": "This is a test email." }</pre>	<pre>{ "status": <status update> }</pre>

					<pre>"recipient": "jane.doe@example.com" , "subject": "Hello World" }</pre>	}
--	--	--	--	--	---	---

[2] Obtaining Azure communication

<https://learn.microsoft.com/en-us/azure/communication-services/quickstarts/email/send-email?tabs=windows%2Cconnection-string&pivots=programming-language-python>

<https://learn.microsoft.com/en-us/azure/communication-services/quickstarts/email/send-email?tabs=windows%2Cconnection-string&pivots=programming-language-python>