

CONCURRENT TCP SERVER

Bui Trong Tung, SoICT, HUST

- How could server accept another client after a client close its session?
- What happened if there are two clients want to connect to Server ?

Content

- I/O Models
- Concurrent TCP server: one child per client
- Concurrent TCP server: one thread per client


I/O MODELS

I/O Models

- blocking I/O
- nonblocking I/O
- I/O multiplexing (select and poll)
- signal driven I/O (SIGIO)
- asynchronous I/O (the POSIX aio_functions)


Blocking I/O Model

- Blocking I/O model: I/O function block process/thread until returning.
- `accept()` , `connect()` , `send()` , `recv()` , ...

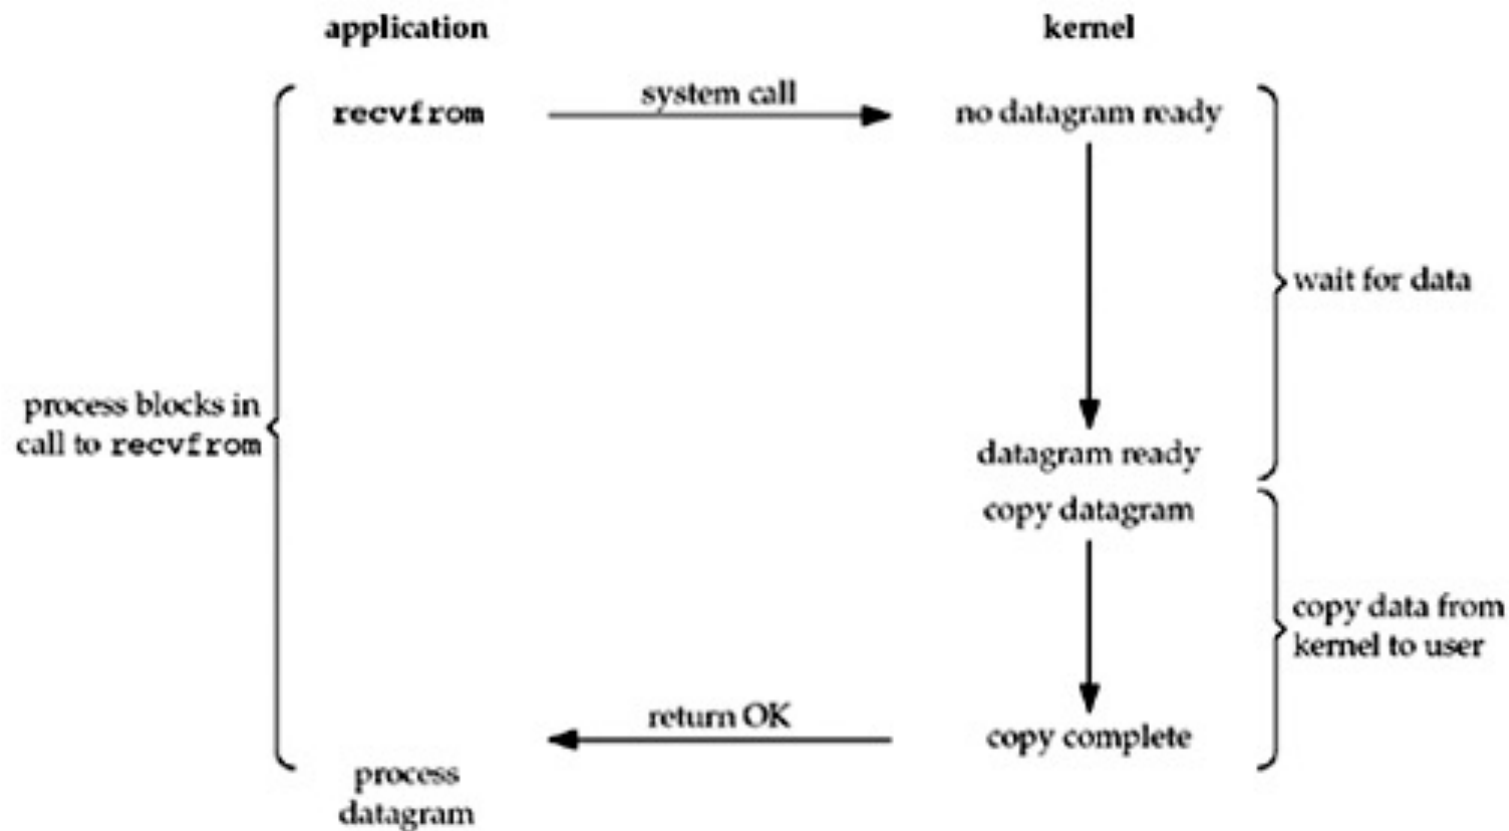


Non-blocking I/O Model

- Non-blocking I/O model: I/O function returns immediately
- If there is no data to return, so the kernel immediately returns an error of EWOULDBLOCK instead

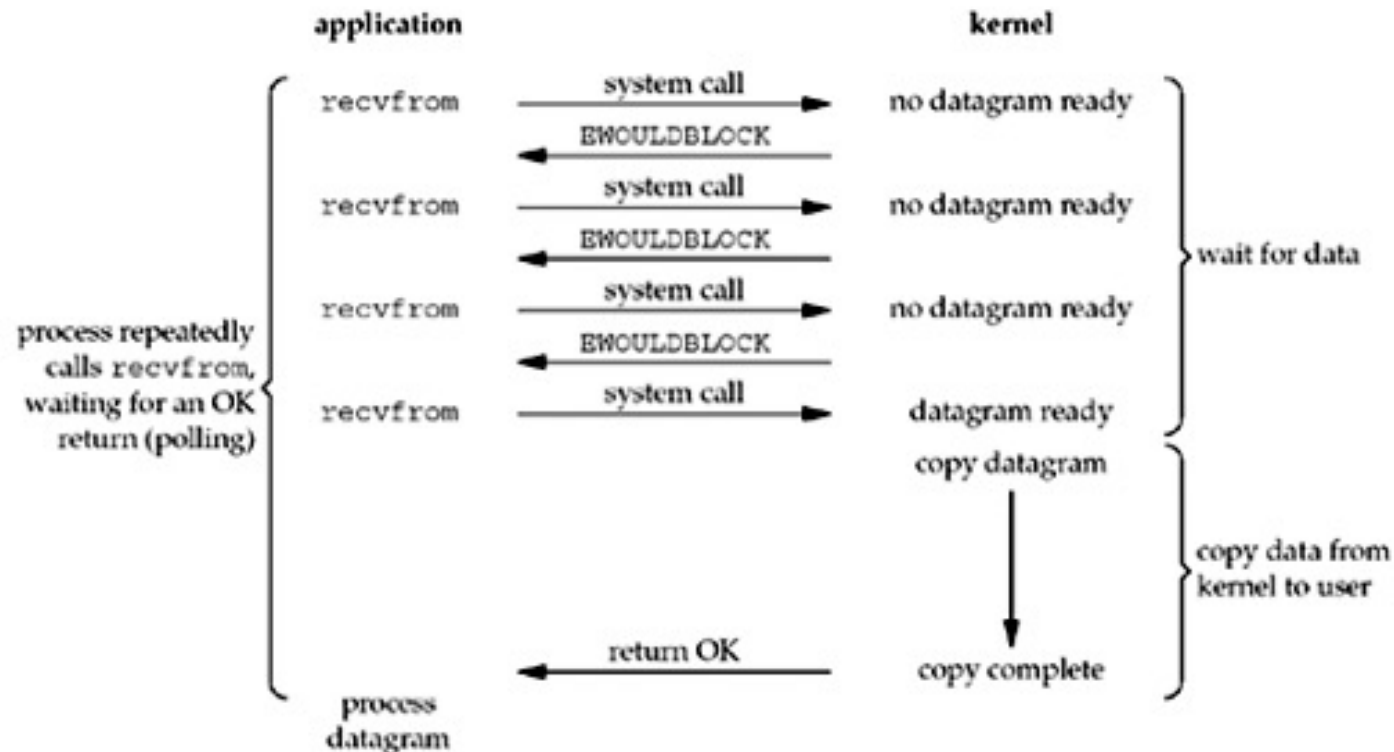


I/O Multiplexing Model

- With I/O multiplexing, we call select or poll and block in one of these two system calls, instead of blocking in the actual I/O system call

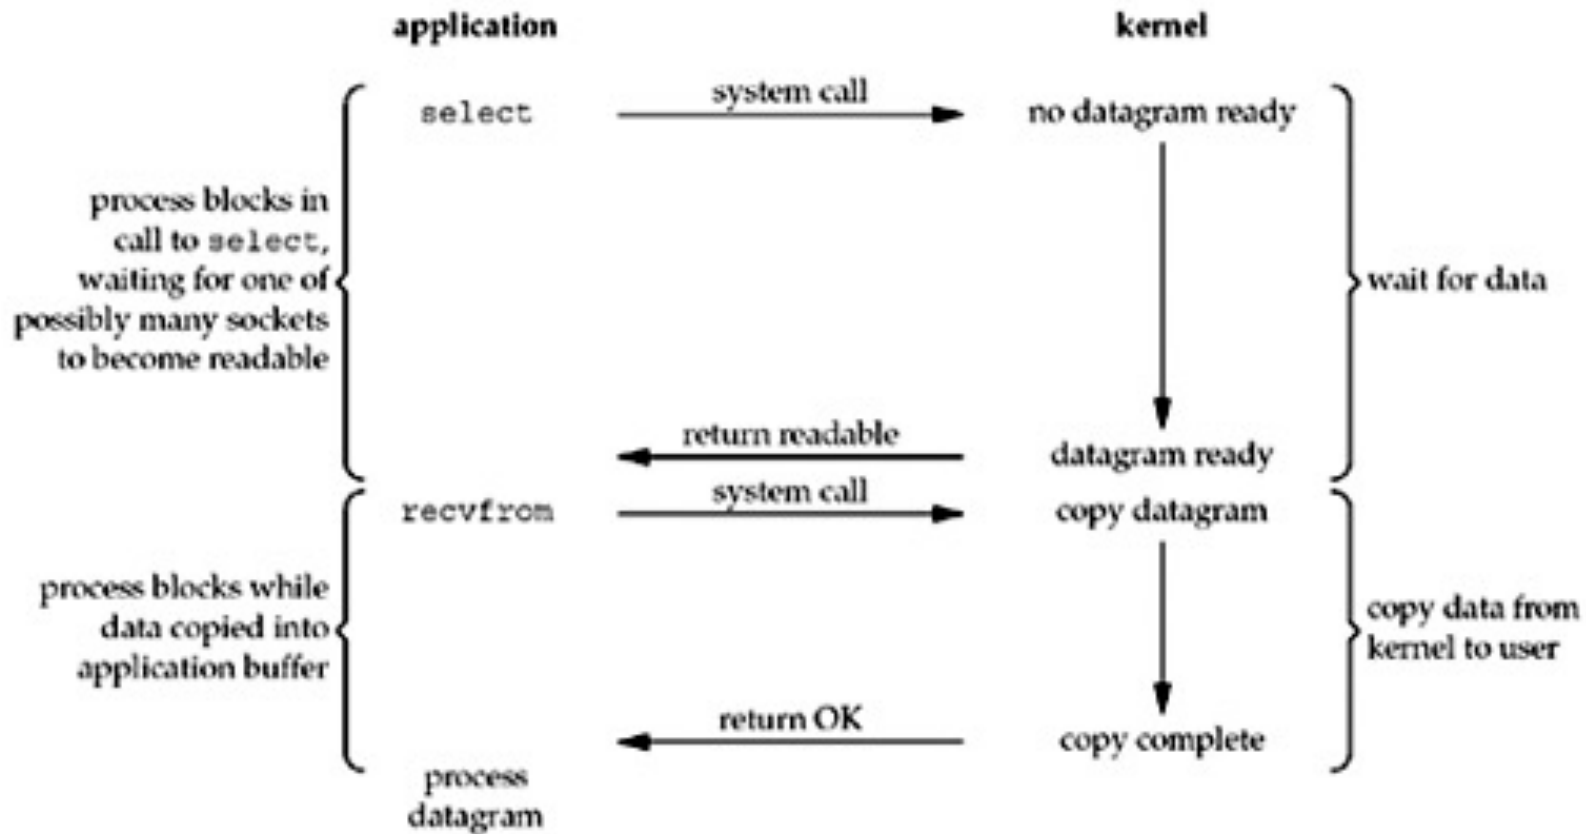


Signal-Driven I/O Model

- Use signals, telling the kernel to notify app with the SIGIO signal when the descriptor is ready

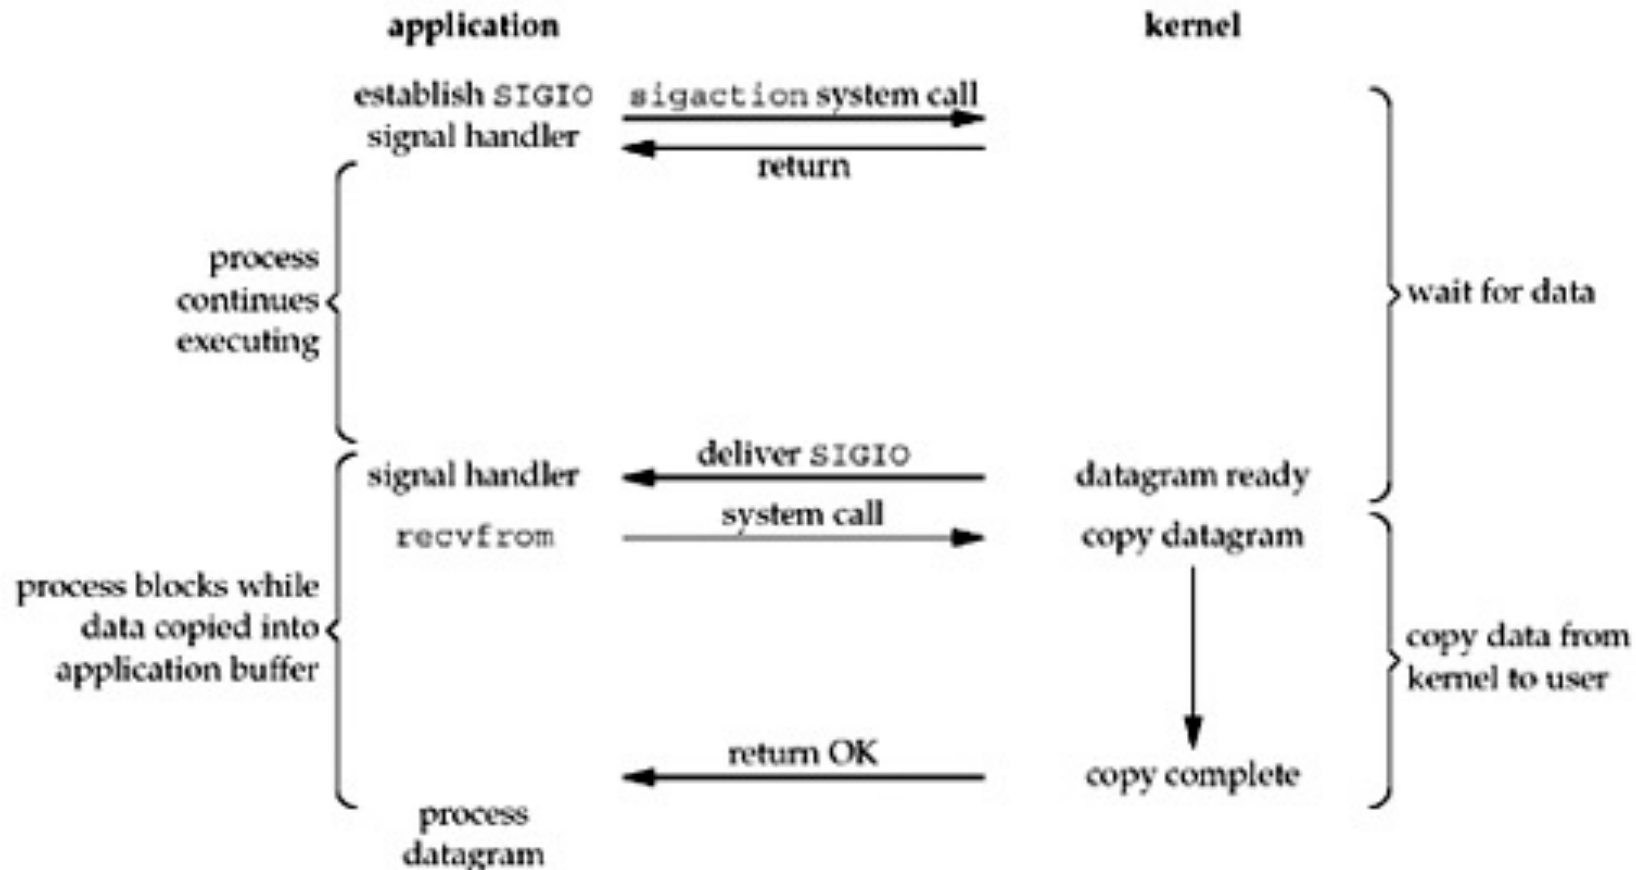


Asynchronous I/O Model

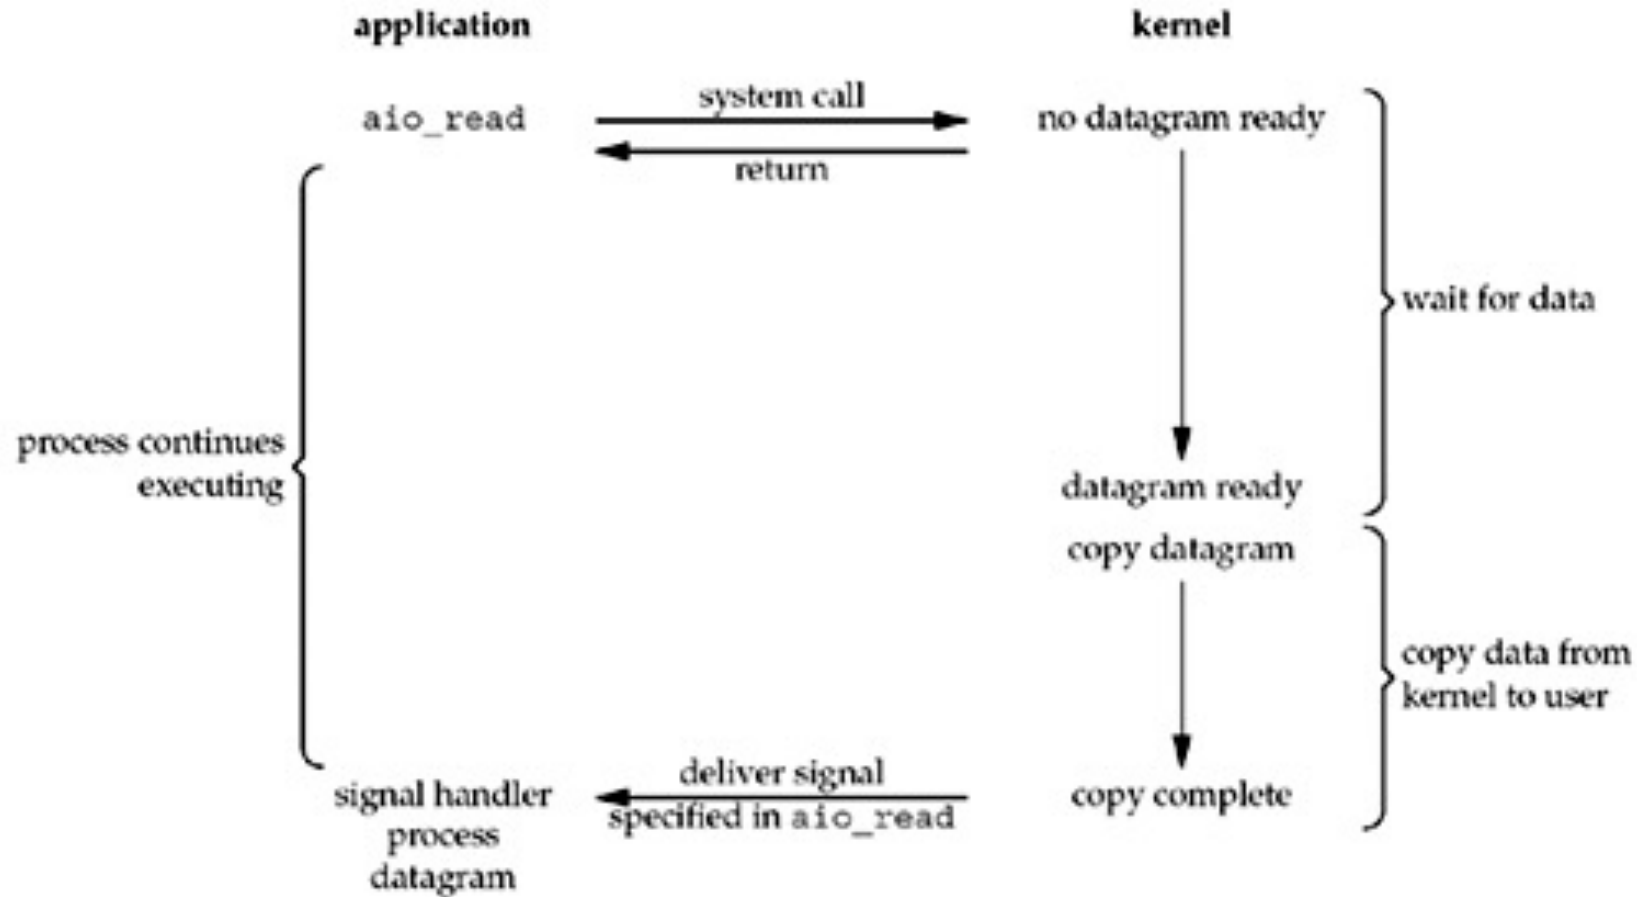

Asynchronous I/O Model (2)

- App calls `aio_read` (the POSIX asynchronous I/O functions begin with `aio_`)
- Pass the kernel
 - the descriptor
 - buffer pointer
 - buffer size (the same three arguments for `read`)
 - buffer offset (similar to `lseek`)
 - how to notify us when the entire operation is complete
- This system call returns immediately and our process is not blocked while waiting for the I/O to complete.

Comparison of the I/O Models

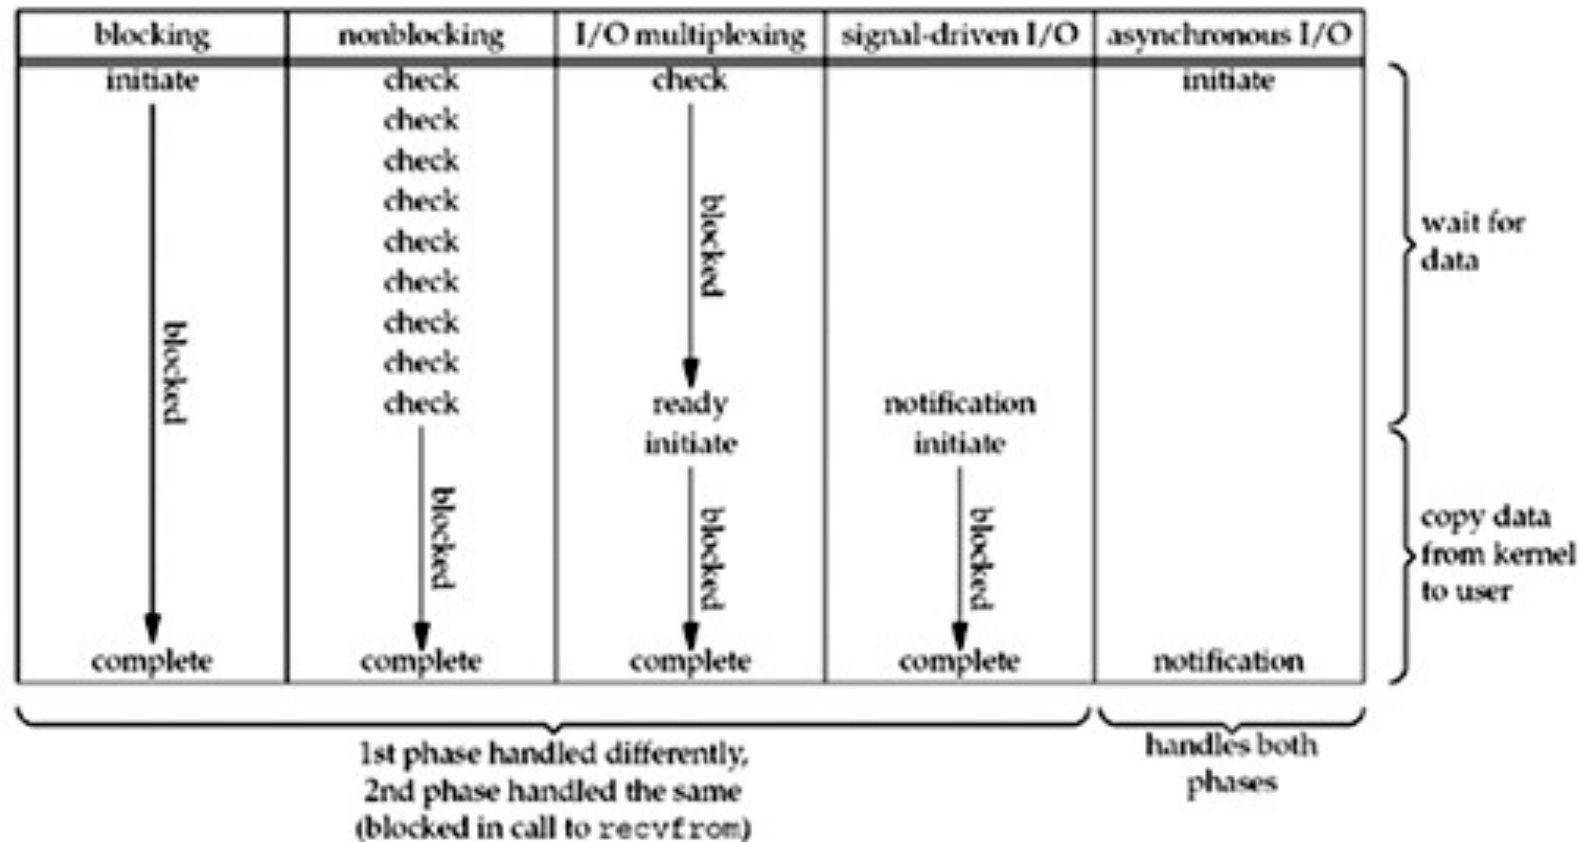


Review TCP Echo Server

```
while(1){
    //accept request
    connfd = accept(listenfd, (sockaddr *) & clientAddr,
                    &clientAddrLen);

    //receive message from client
    rcvBytes = recv(connfd, buff, BUFF_SIZE, 0);
    if(rcvBytes < 0){
        perror("Error :");
    }
    else{
        buff[rcvBytes] = '\\0';
        printf("Receive from client: %s\\n",buff);
        //Echo to client
        sendBytes = send(connfd, buff, strlen(buff), 0);
        if(sendBytes < 0)
            perror("Error: ",);
    }
    closesocket(connfd);
} //end while
```

Blocking I/O Model and TCP server

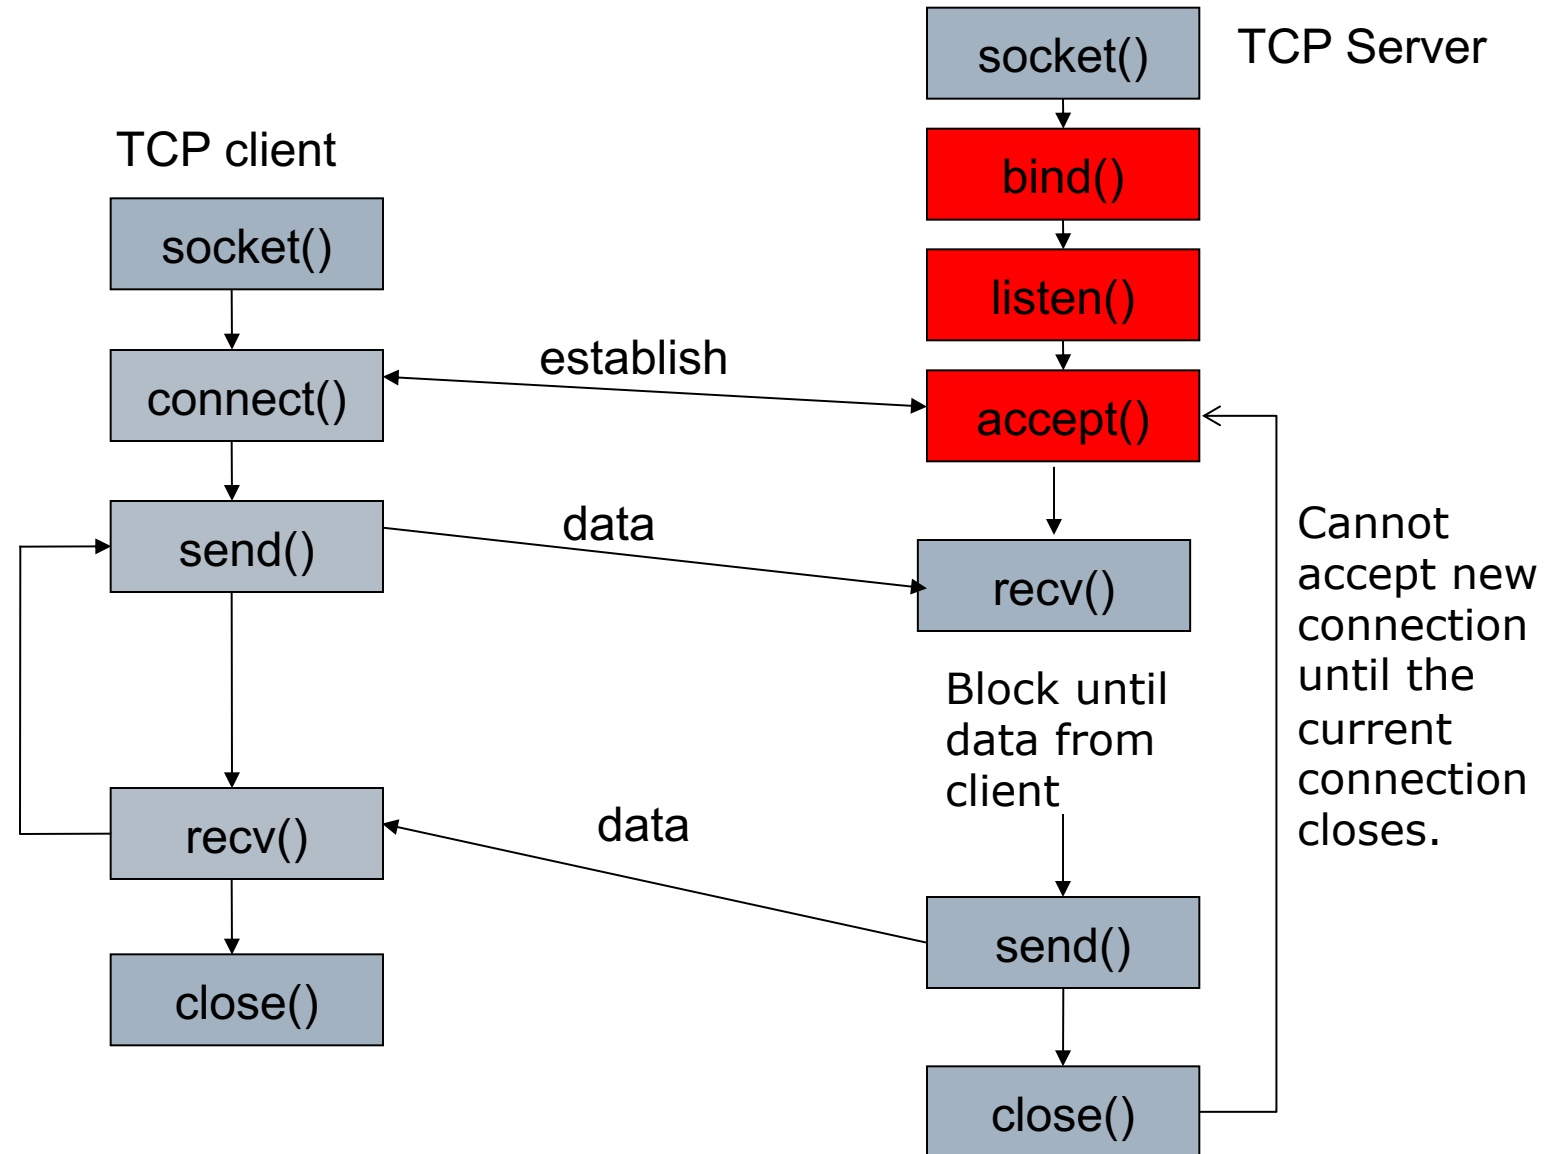

Iterating server

- Simple server
 - But when a client request can take longer to service, we can't handle other clients
- Use a *concurrent server*
- One child per client: `fork()` a child process to handle each client
 - One thread per client: create a thread to handle each client by using `pthread_create()`

MULTI-PROCESS SERVER

Fork process


- **fork** is an operation where a process creates a copy of itself
- Happen in multitask operating system when a process launch another process as child process
- The parent process makes a copy of its memory and gives to the child process
- Fork system call is first introduced in UNIX.
- First process in Linux is “init”

fork()


```
#include <unistd.h>
pid_t fork(void);
```

- Create a new process by copying itself.
- Returns:
 - Once in the calling process (called the parent) with a return value that is the process ID of the newly created process (the child).
 - Once in the child, with a return value of 0
- All descriptors open in the parent before the call to fork are shared with the child after fork returns

One child per client

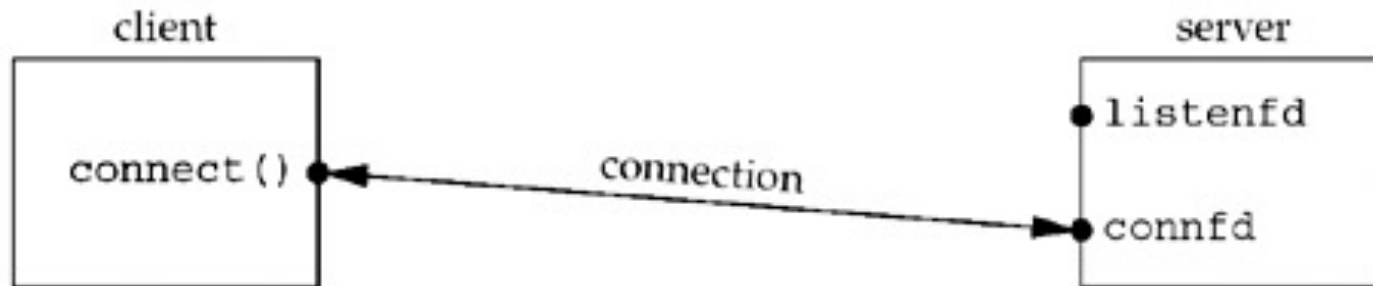

One child per client

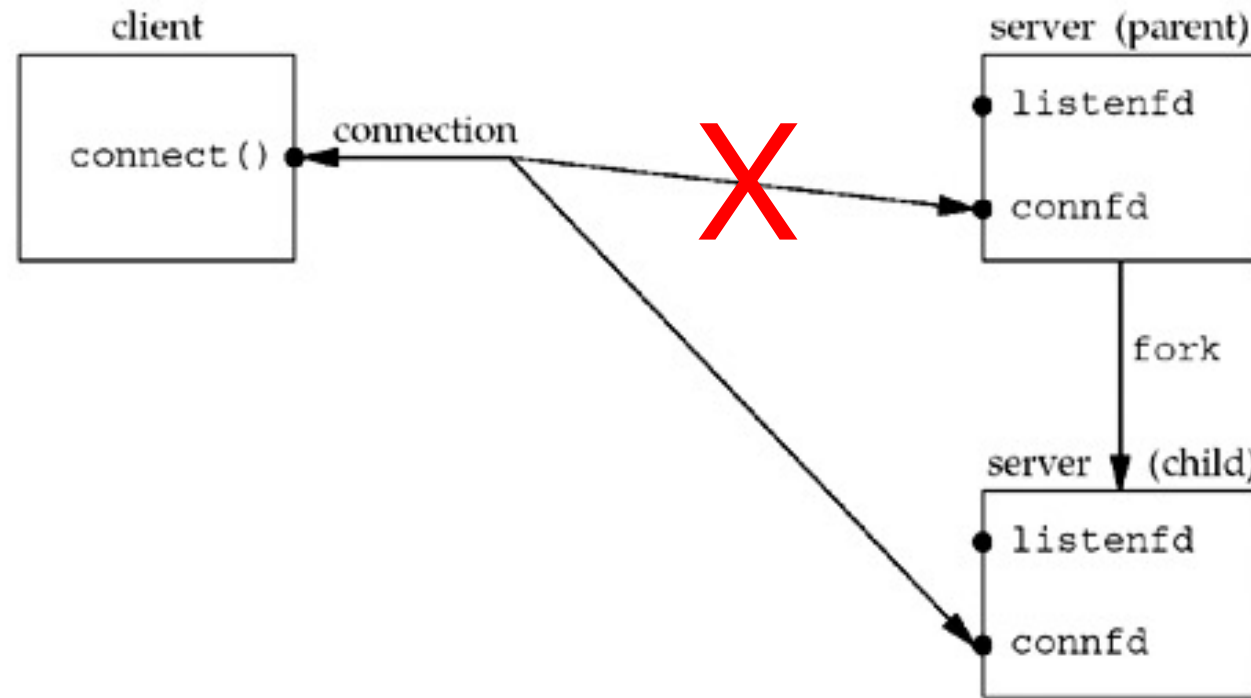

Use fork()

```
pid_t pid;
int listenfd, connfd;
//Step 1: Construct socket
//Step 2: Bind address to socket
//Step 3: Listen request from client

//Step 4: Communicate with client
while (1) {
    connfd = accept (listenfd, ... );
    if( (pid = fork()) == 0) { //process in child (forking)
        close(listenfd); // child closes listening socket
        doit(connfd);    // process the request
        close(connfd);   // done with this client
        exit(0);         // child terminates
    }
    close(connfd); // parent closes connected socket
}
```

Handling SIGCHLD Signals

- When a child process ends, it sends the *SIGCHLD* signal to the parent
 - Information about the child process is still maintained in “process table” in order to allow its parent to read the child exit status afterward.
- If we ignore the *SIGCHLD*, the child process will enter the zombie state
- We need to wait and handle *SIGCHLD* signal

Signaling

- A signal is a notification to a process that an event has occurred.
- Signals are sometimes called software interrupts.
- Signals usually occur asynchronously. By this we mean that a process doesn't know ahead of time exactly when a signal will occur.
- Signals can be sent
 - By one process to another process (or to itself)
 - By the kernel to a process

Signal (cont.)

- Typing certain key combinations at the controlling terminal of a running process causes the system to send it certain signals:
 - Ctrl-C sends an INT signal ("interrupt", SIGINT)
 - Ctrl-Z sends a TSTP signal ("terminal stop", SIGTSTP)
 - Ctrl-\ sends a QUIT signal (SIGQUIT)
- SIGHUP is sent to a process when its controlling terminal is closed (a hangup)
- SIGTERM is sent to a process to request its termination.
 - Unlike the SIGKILL signal, it can be caught and interpreted or ignored by the process.

Handling SIGCHLD Signals


- The purpose of the zombie state is to maintain information about the child for the parent to fetch at some later time.
 - They take up space in the kernel and eventually we can run out of processes
- Whenever we *fork* children, we must *wait* for them to prevent them from becoming zombies → establish a signal handler to catch *SIGCHLD*, and within the handler, we call *wait*
- Establish the signal handler by adding the function call :
signal (SIGCHLD, handler);

wait() and waitpid()

```
#include <sys/wait.h>
pid_t wait (int *statloc);
pid_t waitpid (pid_t pid, int *statloc, int options);
```


- Wait for the status change of a process.
- Use to handle the terminated child
- Both return two values:
 - The return value of the function:
 - the process ID of the terminated child
 - 0 or -1 if error
 - The termination status of the child (an integer) is returned through the *statloc* pointer.

`wait()`

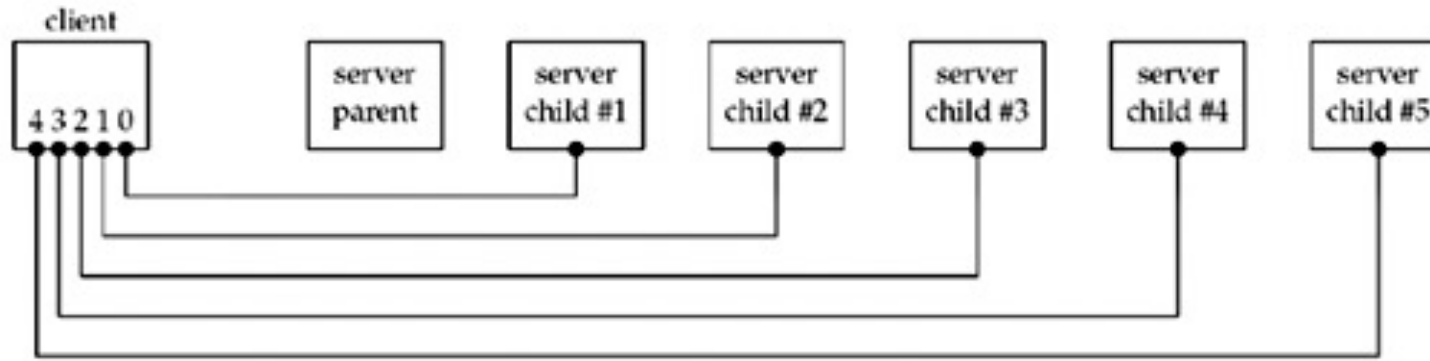

- Create 5 connections from a client to a forking server
- When the client terminates, all open descriptors are closed automatically by the kernel → five connections ended simultaneous

waitpid()

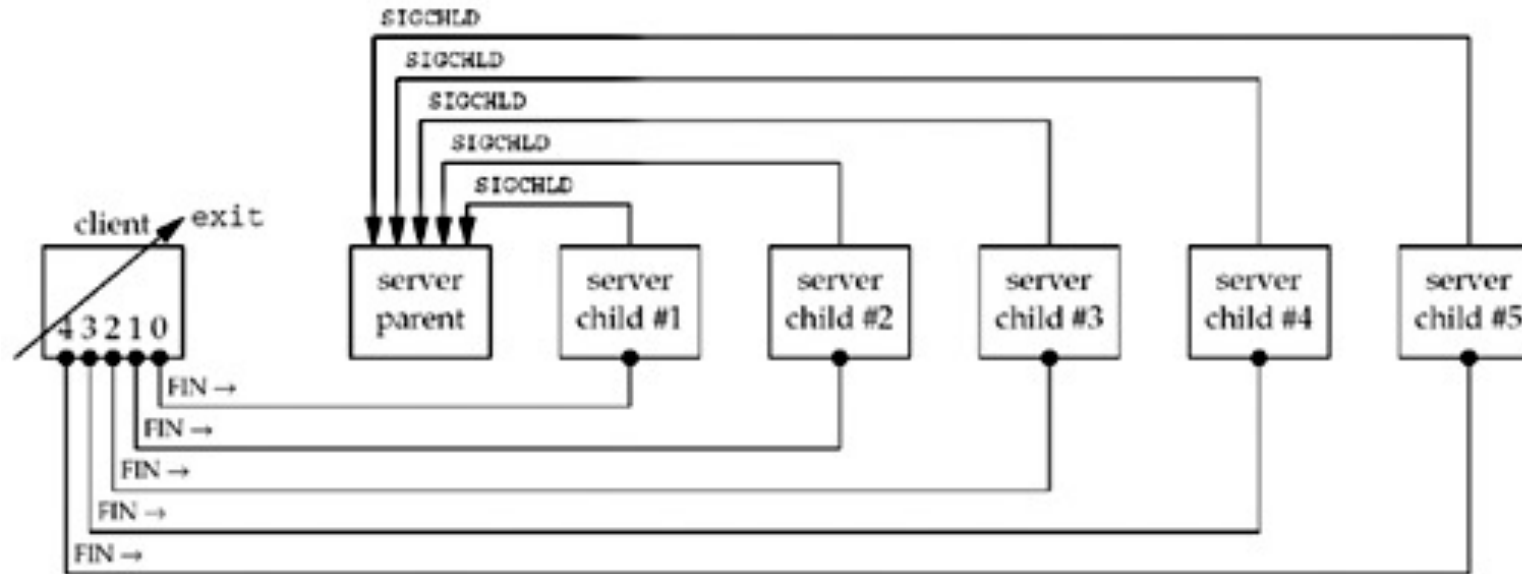

- Client terminates, closing all five connections, terminating all five children → four children are zombies
- It can happen when many users connect to a server
- → we have to use *waitpid()*

waitpid()

pid_t waitpid (pid_t pid, int *statloc, int options);

- $pid < 0$: wait for any child process whose process group ID is equal to the absolute value of *pid*.
- **pid = -1**: wait for any child process.
- $pid = 0$: wait for any child process whose process group ID is equal to that of the calling process
- $pid > 0$: wait for the child whose process ID is equal to the value of *pid*
- Without option WNOHANG, waitpid blocks until the status change
- With option WNOHANG, waitpid returns immediately
- Return
 - Pid of the child whose state has changed
 - with option WNOHANG, return 0 if the specified process has not changed status.

void sig_chld(int signo)

```
void sig_chld(int signo)
{
    pid_t pid;
    int stat;
    pid = waitpid(-1, &stat, WNOHANG );
    printf("child %d terminated\\", pid);
}
```

- **WNOHANG:** waitpid() does not block

Forking server

```
pid_t pid;
int listenfd, connfd;
//Step 1: Construct socket
//Step 2: Bind address to socket
//Step 3: Listen request from client

// wait for a child process to stop
signal(SIGCHLD, sig_chld);
//Step 4: Communicate with client
while (1) {
    connfd = accept (listenfd, ... );
    if( (pid = fork()) == 0) {// process in child
        close(listenfd); // child closes listening socket
        doit(connfd);    // process the request
        close(connfd);   // done with this client
        exit(0);         // child terminates
    }
    close(connfd); // parent closes connected socket
}
```


Handling EINTR Errors

- When a process is blocked in a **slow system call** and the process catches a signal and the signal handler returns, the system call can return an error of EINTR.
- Slow system call: connect, accept, send, recv...
- Not all kernels automatically restart some interrupted system calls
- We must rewrite function to handle EINTR error

```
while(1)
    if ((connfd = accept (listenfd...) < 0) {
        if (errno == EINTR)
            continue;           /* back to for () */
        else
            perror ("Error: ");
    }
```