



Lesson 24

Android Location Based Services

Victor Matos
Cleveland State University


Notes are based on:
Android Developers
<http://developer.android.com/index.html>

Portions of this page are reproduced from work created and [shared by Google](#) and used according to terms described in the [Creative Commons 3.0 Attribution License](#).

Location Services

Introduction

A location-based service (LBS) is an information system driven by the ability of the 'central' system to detect the geographical position of the mobile devices.

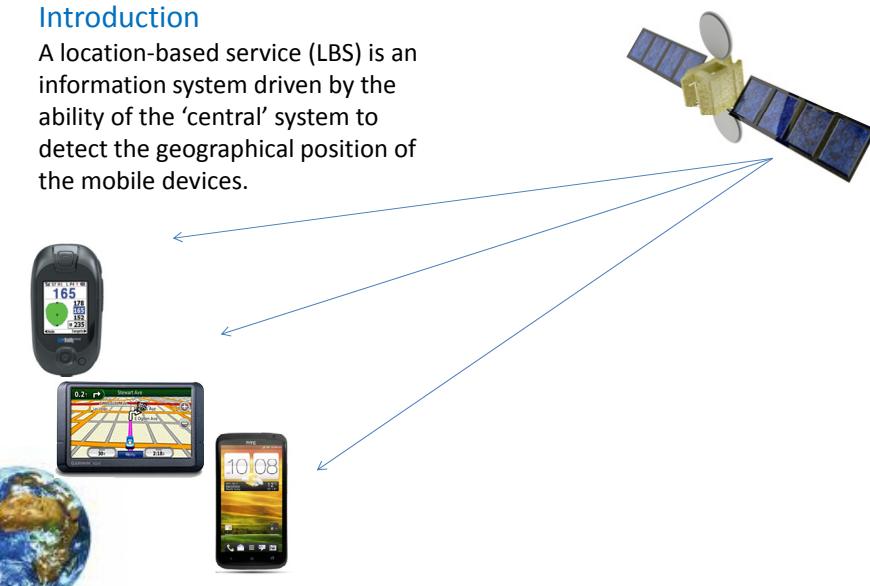

2

Location Services

Introduction

Location Based Services are used in a variety of situations, such as *commercial, entertainment, emergency, health, work, personal life, etc.*

Examples:

- Locate the nearest bank, restaurant, gas station, hotel, golf course, hospital, police station, etc.
- Provide transportation information on how to go from 'here' to 'there'.
- Social networking is used to locate and reach events, friends and family members.

3


Location Services

How the Global Positioning System (GPS) Works?

Originally created by DOD-USA under the name NAVSTAR (Navigation System for Timing and Ranging) but it is commonly known as **Global Positioning System (GPS)**.

The system's backbone consists of 27 Earth-orbiting satellites (24 in operation and 3 in stand-by mode)

Each satellite circles the globe at about 12,000 miles, making *two complete rotations every day*.

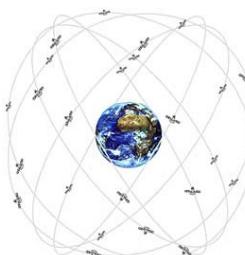


The disposition of orbiting satellites is set so that at any time there are at least *four of them in range to any point on earth*.

Location Services

How the Global Positioning System (GPS) Works?

The image highlights the orbit of satellite CHINASAT-5A.

See: NASA Satellite Tracking
<http://science.nasa.gov/realtime/jtrack/3d/JTrack3D.html/>

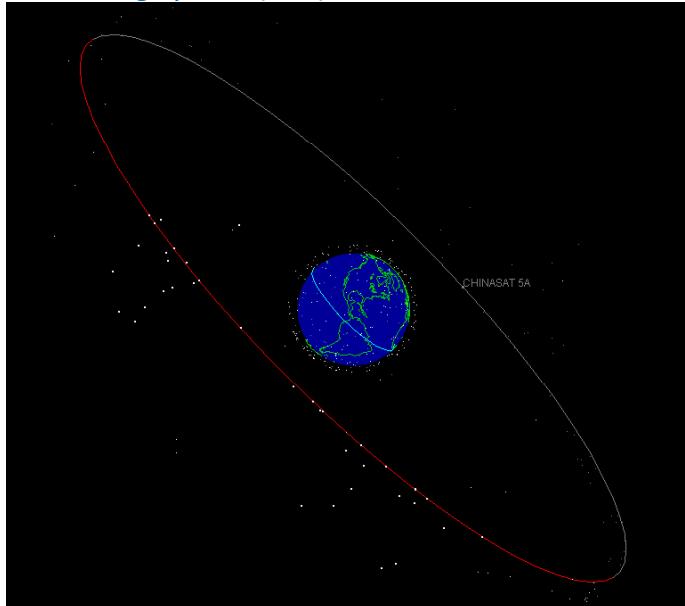

Location Services


How the Global Positioning System (GPS) Works?

2-D Trilateration

As an example, assume a person is located at the following relative position:

--- Miami	1795 km
--- Caracas	1874 km
--- Bogota	1251 km

STEP1
 Draw a circle centered in Miami. Scale its radius to 1795 Km.

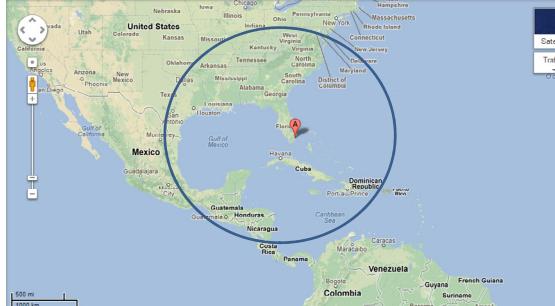

Observe that not enough information is available for a definitive fix to be made, the person could be anywhere on the blue circle.

6

Location Services

How the Global Positioning System (GPS) Works?

2-D Trilateration

STEP2

Draw a second circle centered in Caracas, Venezuela.
Scale its radius to 1874 Km.


Two intersection points appear:
one on the Caribbean Ocean,
an another in Central America.



7

Location Services

How the Global Positioning System (GPS) Works? / Trilateration

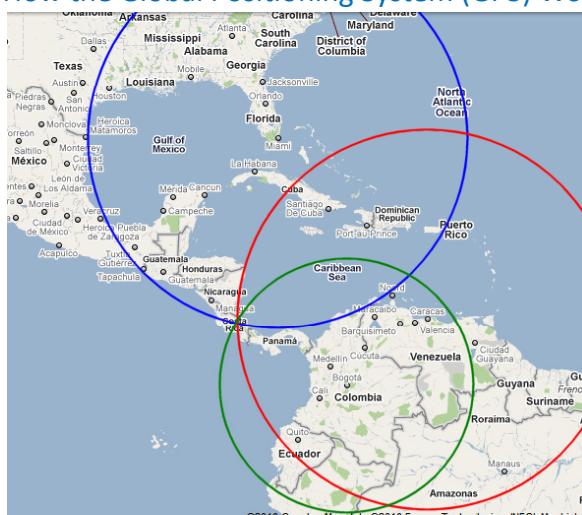

- Miami 1795 km
- Caracas 1874 km
- Bogota 1251 km

STEP3

Draw a final circle entered in Bogota, Colombia. Set radius to 1251 Km.

The three circles now
intersect on the point over
Central America.


The actual location is:
San Jose, Costa Rica.

8

Location Services

3D-Trilateration

Rather than circles three spheres intersect to define your GPS receiver's location.

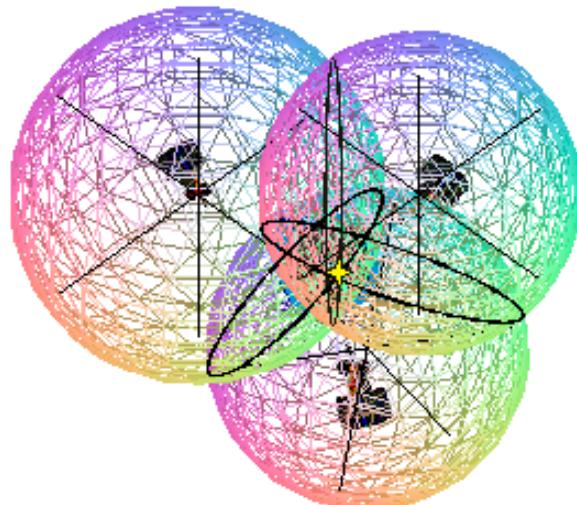

Reference:

<http://www.math.tamu.edu/~dallen/physics/gps/gps.htm#references>


Three spheres

9

Location Services

3D-Trilateration

For a visual explanation visit: <http://electronics.howstuffworks.com/gadgets/travel/gps.htm>

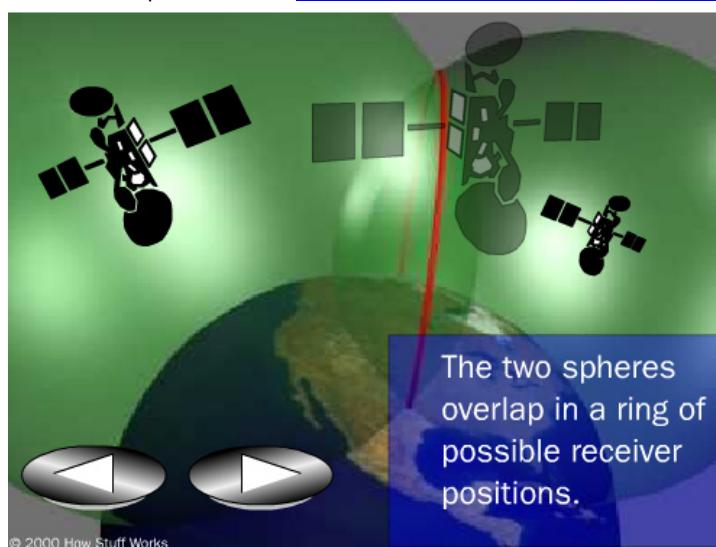


10

Location Services

3D-Trilateration

For a visual explanation visit: <http://electronics.howstuffworks.com/gadgets/travel/gps.htm>

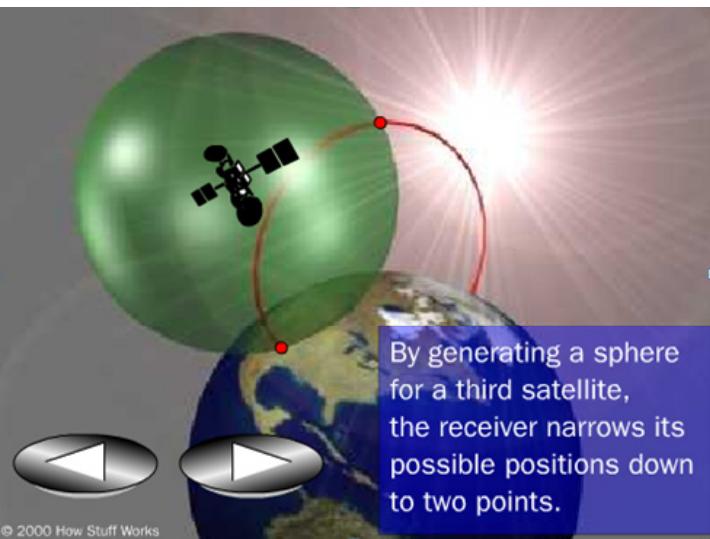

By generating a sphere for a third satellite, the receiver narrows its possible positions down to two points.

© 2000 How Stuff Works

11


Location Services

Cell Tower Triangulation

An alternative method to determine the location of a cell phone is to estimate its distance to three nearby cell towers.

Distance of the phone to each antenna could be estimated based upon the *lag time* between the moment the tower sends a *ping* to the phone and receives the answering ping back.

Quite similar to the 2D-Trilateration Method.

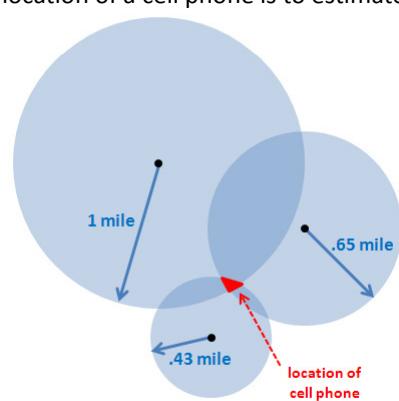

Triangulation - cell phone detected within a certain radius of each of 3 cell towers – the area where each cell tower overlaps the phone is where it is pinpointed.


Reference: <http://searchengineland.com/cell-phone-triangulation-accuracy-is-all-over-the-map-14790>

12

Location Services

Latitude & Longitude

Latitude in GPS-Decimal notation: +90.000000 (North) to -90.000000 (South)
 Longitude GPS-Decimal notation: +180.000000 (East) to -180.000000 (West)

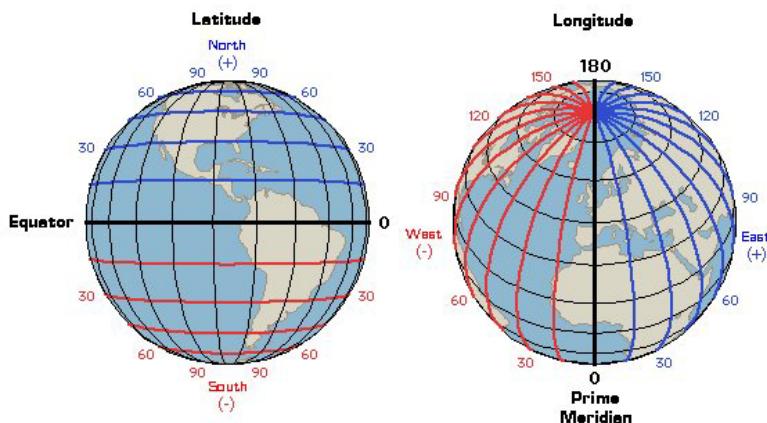

13

Location Services

Android Location Classes

The Android API provides Location data based on a variety of methods including: *Cell Tower Triangulation*, and most commonly *GPS chip readings*.



GPS is the most common location provider on the Android based phones.

It offers the most accuracy.

Picture: Epson Infineon GPS (2.8 x 2.9mm)

Reference: <http://gizmodo.com/5152146/>

14

Location Services

Android Location Classes

Address	A class representing an Address, i.e, a set of strings describing a location.
Criteria	A class indicating the application criteria for selecting a location provider.
Geocoder	A class for handling geocoding.
GpsSatellite	This class represents the current state of a GPS satellite.
GpsStatus	This class represents the current state of the GPS engine.
Location	A class representing a geographic location sensed at a particular time (a "fix").
LocationManager	This class provides access to the system location services.
LocationProvider	An abstract superclass for location providers

15

Location Services

Android Location Interfaces

GpsStatus.Listener	Used for receiving notifications when GPS status has changed.
GpsStatus.NmeaListener	Used for receiving NMEA sentences from the GPS.
LocationListener	Used for receiving notifications from the <i>LocationManager</i> when the location has changed.

16

Location Services

Location Class

- A class representing a geographic location sensed at a particular time (a "fix").
- A location consists of a **latitude** and **longitude**, a **UTC timestamp** and **optionally** information on **altitude**, **speed**, and **bearing**.
- Information specific to a particular provider or class of providers may be communicated to the application using **getExtras**, which returns a Bundle of **key/value** pairs.
- Each provider will only provide those entries for which information is available.

CONSTANTS	
Location. FORMAT_DEGREES	Constant used to specify formatting of a latitude or longitude in the form [+/-]DDDD.DDDDD where D indicates degrees.
Location. FORMAT_MINUTES	Constant used to specify formatting of a latitude or longitude in the form [+/-]DDD:MM.MMMMMM where D indicates degrees and M indicates minutes of arc (1 minute = 1/60th of a degree).
Location. FORMAT_SECONDS	Constant used to specify formatting of a latitude or longitude in the form [+/-] DDD:MM:SS.SSSSS where D indicates degrees, M indicates minutes of arc, and S indicates seconds of arc (1 minute = 1/60th of a degree, 1 second = 1/3600th of a degree).

17

Location Services

Location Class – Useful Methods

static void	distanceBetween (double startLatitude, double startLongitude, double endLatitude, double endLongitude, float[] results)	Computes the approximate distance in meters between two locations, and optionally the initial and final bearings of the shortest path between them.
float	getAccuracy ()	Returns the accuracy of the fix in meters.
double	getAltitude ()	Returns the altitude of this fix.
float	getBearing ()	Returns the direction of travel in degrees East of true North.
Bundle	getExtras ()	Returns additional provider-specific information about the location fix as a Bundle.
double	getLatitude ()	Returns the latitude of this fix.
double	getLongitude ()	Returns the longitude of this fix.
String	getProvider ()	Returns the name of the provider that generated this fix, or null if it is not associated with a provider.
float	getSpeed ()	Returns the speed of the device over ground in meters/second.
long	getTime ()	Returns the UTC time of this fix, in milliseconds since January 1, 1970.

18

Location Services

Location Manager

This class provides access to the system location services.

These services allow applications

1. To *obtain periodic updates of the device's geographical location*,
2. or to fire an application-specified **Intent** when the *device enters the proximity of a given geographical location*.

You do not instantiate this class directly; instead, retrieve it through

`Context.getSystemService (Context.LOCATION_SERVICE)`

19

Location Services

Location Manager – Useful Methods

void	<code>addProximityAlert (double latitude, double longitude, float radius, long expiration, PendingIntent intent)</code> Sets a proximity alert for the location given by the position (latitude, longitude) and the given radius.
String	<code>getBestProvider (Criteria criteria, boolean enabledOnly)</code> Returns the name of the provider that best meets the given criteria.
GpsStatus	<code>getGpsStatus (GpsStatus status)</code> Retrieves information about the current status of the GPS engine.
Location	<code>getLastKnownLocation (String provider)</code> Returns a Location indicating the data from the last known location fix obtained from the given provider.
LocationProvider	<code>getProvider (String name)</code> Returns information associated with the location provider of the given name, or null if no provider exists by that name.
List<String>	<code>getProviders (Criteria criteria, boolean enabledOnly)</code> Returns a list of the names of LocationProviders that satisfy the given criteria, or null if none do.
void	<code>requestLocationUpdates (String provider, long minTime, float minDistance, PendingIntent intent)</code> Registers the current activity to be notified periodically by the named provider.
void	<code>requestLocationUpdates (String provider, long minTime, float minDistance, LocationListener listener)</code> Registers the current activity to be notified periodically by the named provider.
void	<code>setTestProviderStatus (String provider, int status, Bundle extras, long updateTime)</code> Sets mock status values for the given provider.

20

Location Services

LocationListener Class

Used for receiving notifications from the **LocationManager** when *the location has changed.*

These methods are called if the **LocationListener** has been *registered* with the location manager service using the method:

requestLocationUpdates (Provider, minTime, minDistance, LocationListener)

21

Location Services

LocationListener Class – Useful Methods

abstract void	<code>onLocationChanged (Location location)</code> Called when the location has changed.
abstract void	<code>onProviderDisabled (String provider)</code> Called when the provider is disabled by the user.
abstract void	<code>onProviderEnabled (String provider)</code> Called when the provider is enabled by the user.
abstract void	<code>onStatusChanged (String provider, int status, Bundle extras)</code> Called when the provider status changes.

22

<h1>Location Services</h1>																									
<h2>LocationProvider Class</h2>																									
Constants: LocationProvider.AVAILABLE LocationProvider.OUT_OF_SERVICE LocationProvider.TEMPORARILY_UNAVAILABLE																									
Public Methods <table border="1"> <thead> <tr> <th></th><th></th></tr> </thead> <tbody> <tr> <td>abstract int</td><td>getAccuracy() Returns a constant describing horizontal accuracy of this provider.</td></tr> <tr> <td>String</td><td>getName() Returns the name of this provider.</td></tr> <tr> <td>abstract int</td><td>getPowerRequirement() Returns the power requirement for this provider.</td></tr> <tr> <td>abstract boolean</td><td>hasMonetaryCost() true if the use of this provider may result in a monetary charge to the user, false if use is free.</td></tr> <tr> <td>boolean</td><td>meetsCriteria(Criteria criteria) Returns true if this provider meets the given criteria, false otherwise.</td></tr> <tr> <td>abstract boolean</td><td>requiresCell() true access to a cellular network (to make use of cell tower IDs) is needed, false otherwise.</td></tr> <tr> <td>abstract boolean</td><td>requiresNetwork() true if the provider requires access to a data network (e.g., the Internet), false otherwise.</td></tr> <tr> <td>abstract boolean</td><td>requiresSatellite() true if access to a satellite-based positioning system (e.g., GPS) is needed, false otherwise.</td></tr> <tr> <td>abstract boolean</td><td>supportsAltitude() Returns true if the provider is able to provide altitude information, false otherwise.</td></tr> <tr> <td>abstract boolean</td><td>supportsBearing() Returns true if the provider is able to provide bearing information, false otherwise.</td></tr> <tr> <td>abstract boolean</td><td>supportsSpeed() Returns true if the provider is able to provide speed information, false otherwise.</td></tr> </tbody> </table>				abstract int	getAccuracy() Returns a constant describing horizontal accuracy of this provider.	String	getName() Returns the name of this provider.	abstract int	getPowerRequirement() Returns the power requirement for this provider.	abstract boolean	hasMonetaryCost() true if the use of this provider may result in a monetary charge to the user, false if use is free.	boolean	meetsCriteria(Criteria criteria) Returns true if this provider meets the given criteria, false otherwise.	abstract boolean	requiresCell() true access to a cellular network (to make use of cell tower IDs) is needed, false otherwise.	abstract boolean	requiresNetwork() true if the provider requires access to a data network (e.g., the Internet), false otherwise.	abstract boolean	requiresSatellite() true if access to a satellite-based positioning system (e.g., GPS) is needed, false otherwise.	abstract boolean	supportsAltitude() Returns true if the provider is able to provide altitude information, false otherwise.	abstract boolean	supportsBearing() Returns true if the provider is able to provide bearing information, false otherwise.	abstract boolean	supportsSpeed() Returns true if the provider is able to provide speed information, false otherwise.
abstract int	getAccuracy() Returns a constant describing horizontal accuracy of this provider.																								
String	getName() Returns the name of this provider.																								
abstract int	getPowerRequirement() Returns the power requirement for this provider.																								
abstract boolean	hasMonetaryCost() true if the use of this provider may result in a monetary charge to the user, false if use is free.																								
boolean	meetsCriteria(Criteria criteria) Returns true if this provider meets the given criteria, false otherwise.																								
abstract boolean	requiresCell() true access to a cellular network (to make use of cell tower IDs) is needed, false otherwise.																								
abstract boolean	requiresNetwork() true if the provider requires access to a data network (e.g., the Internet), false otherwise.																								
abstract boolean	requiresSatellite() true if access to a satellite-based positioning system (e.g., GPS) is needed, false otherwise.																								
abstract boolean	supportsAltitude() Returns true if the provider is able to provide altitude information, false otherwise.																								
abstract boolean	supportsBearing() Returns true if the provider is able to provide bearing information, false otherwise.																								
abstract boolean	supportsSpeed() Returns true if the provider is able to provide speed information, false otherwise.																								

23

<h1>Location Services</h1>	
<h2>LocationProvider Class</h2>	
<p>An <i>abstract superclass</i> for location providers.</p>	
<p>A location provider <i>supplies periodic reports on the geographical location of the device</i>.</p>	
<p>Each provider has a set of criteria under which it may be used; for example, some providers require GPS hardware and visibility to a number of satellites; others require the use of the cellular radio, or access to a specific carrier's network, or access to the internet.</p>	
<p>They may also have <i>different battery consumption characteristics</i> or <i>monetary costs</i> to the user.</p>	
<p>The Criteria class allows providers to be selected based on user-specified criteria.</p>	

24

Location Services

Example – Obtain Location Coordinates

In this example we request GPS services and display *latitude* and *longitude* values on the UI. Additionally we deliver an SMS with this information.


Notes

1. Observe the ***GPS chip is not a synchronous device*** that will immediately respond to a "give me a GPS reading" call.
2. In order to engineer a **good solution** that takes into account the potential delays in obtaining location data we place the UI in the main activity and the request for location call in a background service.
3. Remember the service runs in the same process space as the main activity, therefore for the sake of responsiveness we must place the logic for location data request in a separate parallel **thread**.
4. A thread (unlike an Activity) **needs** the presence of a **Looper** control to manage IPC message sending. This implies additional *Looper.prepare* and *Looper.loop* methods surrounding the *locationUpdate* method.



25

Location Services

Example – Obtain Location from GPS

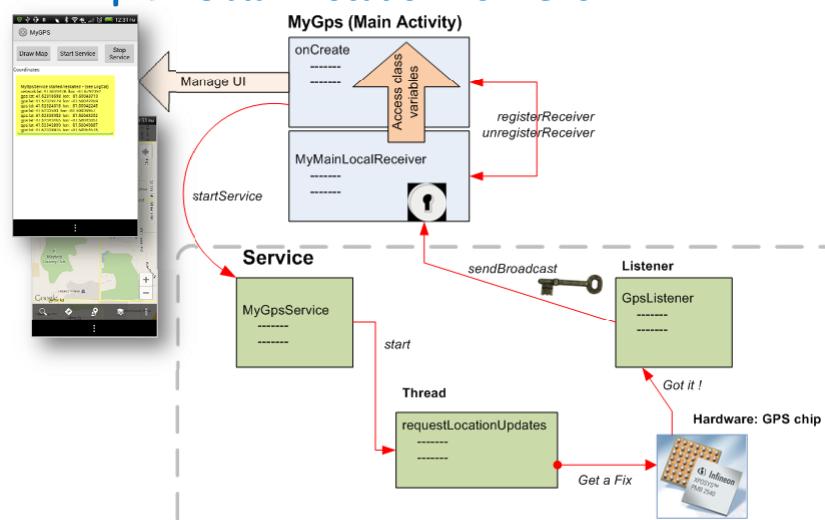

26

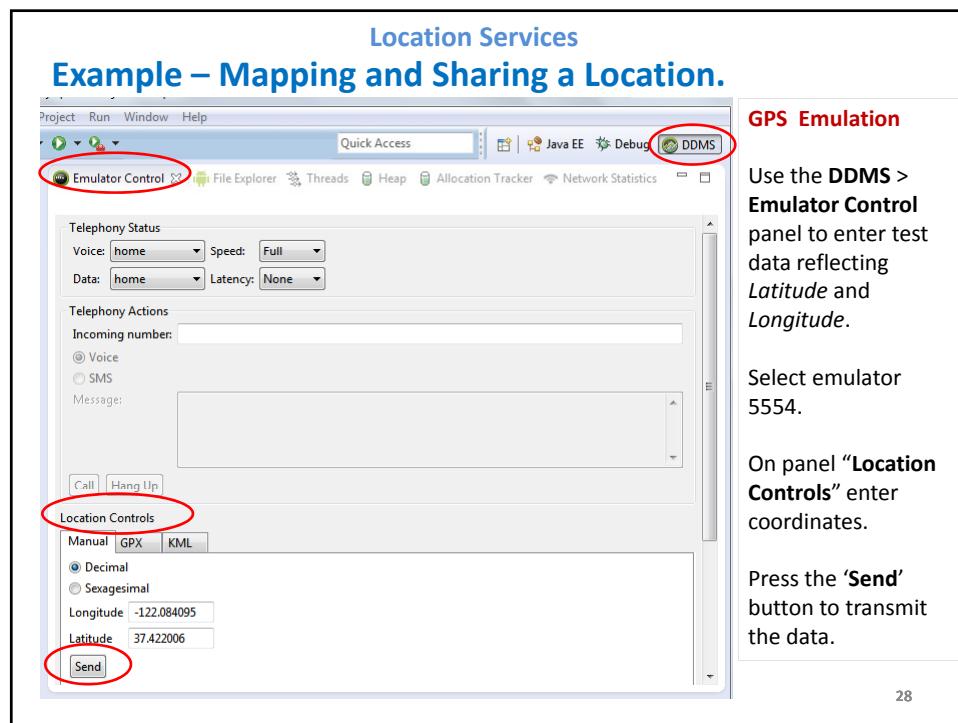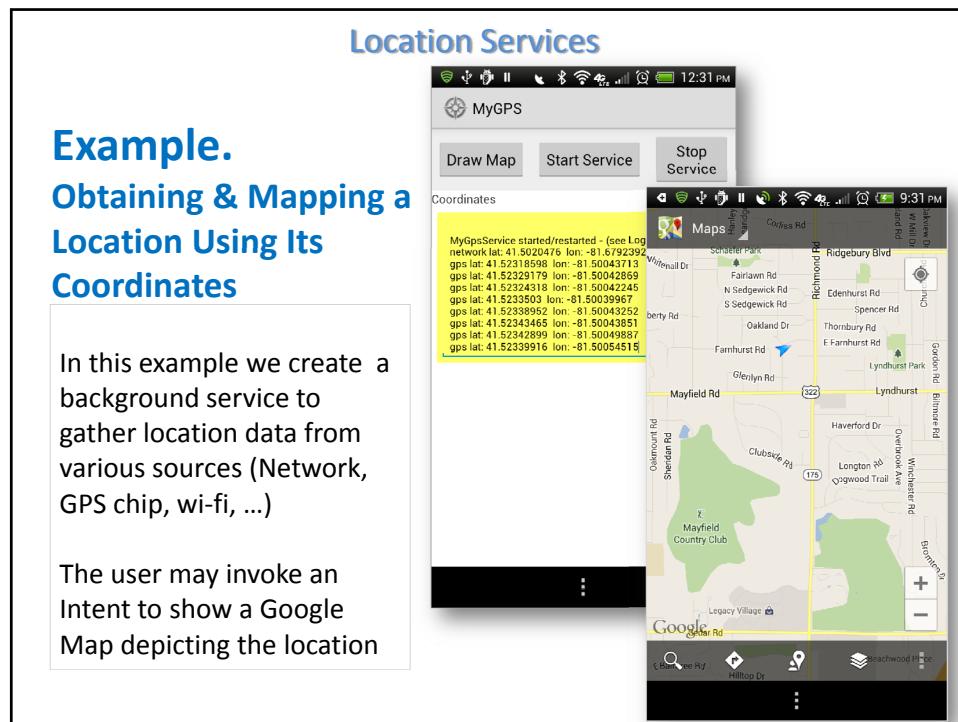

Location Services


Example – Obtain Location Coordinates – Layout 1 of 2

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:orientation="vertical" >

    <LinearLayout
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:background="#ffffffff" >

        <Button
            android:id="@+id	btnDrawMap"
            android:layout_width="wrap_content"
            android:layout_height="wrap_content"
            android:layout_gravity="center"
            android:layout_margin="6dp"
            android:text="Draw Map" />

        <Button
            android:id="@+id	btnStartService"
            android:layout_width="wrap_content"
            android:layout_height="wrap_content"
            android:layout_gravity="center"
            android:layout_margin="6dp"
            android:text="Start Service" />
    
```

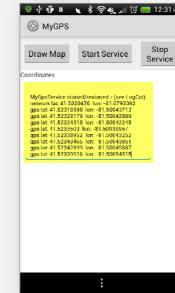

29

Location Services

Example – Obtain Location Coordinates – Layout 2 of 3

```
<Button
    android:id="@+id	btnStopService"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:layout_gravity="center"
    android:layout_margin="6dp"
    android:text="Stop Service" />
</LinearLayout>

<TextView
    android:id="@+id	txtTopLine"
    android:layout_width="match_parent"
    android:layout_height="wrap_content"
    android:text="Coordinates"
    android:textAppearance="?android:attr/textAppearanceSmall" />

<ScrollView
    android:layout_width="match_parent"
    android:layout_height="wrap_content"
    android:layout_margin="7dp"
    android:background="#ffffffff66" >

    <LinearLayout
        android:layout_width="match_parent"
        android:layout_height="wrap_content" >
```



30

Location Services

Example – Obtain Location Coordinates – Layout 3 of 3

```

<TextView
    android:id="@+id/txtMsg"
    android:layout_width="0dip"
    android:layout_height="wrap_content"
    android:layout_margin="3dp"
    android:textSize="12sp" />
</LinearLayout>

</ScrollView>

</LinearLayout>

```

The screenshot shows a mobile application window titled "MyGPS". At the top, there are three buttons: "Draw Map", "Start Service", and "Stop Service". Below the buttons, there is a section labeled "Coordinates" containing a list of location data. The data is presented in a table format:

	Latitude	Longitude
gps 1	32.021059	81.309471
gps 2	32.021059	81.309471
gps 3	32.021059	81.309471
gps 4	32.021059	81.309471
gps 5	32.021059	81.309471
gps 6	32.021059	81.309471
gps 7	32.021059	81.309471
gps 8	32.021059	81.309471
gps 9	32.021059	81.309471
gps 10	32.021059	81.309471
gps 11	32.021059	81.309471
gps 12	32.021059	81.309471
gps 13	32.021059	81.309471
gps 14	32.021059	81.309471
gps 15	32.021059	81.309471
gps 16	32.021059	81.309471
gps 17	32.021059	81.309471
gps 18	32.021059	81.309471
gps 19	32.021059	81.309471
gps 20	32.021059	81.309471
gps 21	32.021059	81.309471
gps 22	32.021059	81.309471
gps 23	32.021059	81.309471
gps 24	32.021059	81.309471
gps 25	32.021059	81.309471
gps 26	32.021059	81.309471
gps 27	32.021059	81.309471
gps 28	32.021059	81.309471
gps 29	32.021059	81.309471
gps 30	32.021059	81.309471
gps 31	32.021059	81.309471
gps 32	32.021059	81.309471
gps 33	32.021059	81.309471
gps 34	32.021059	81.309471
gps 35	32.021059	81.309471
gps 36	32.021059	81.309471
gps 37	32.021059	81.309471
gps 38	32.021059	81.309471
gps 39	32.021059	81.309471
gps 40	32.021059	81.309471
gps 41	32.021059	81.309471
gps 42	32.021059	81.309471
gps 43	32.021059	81.309471
gps 44	32.021059	81.309471
gps 45	32.021059	81.309471
gps 46	32.021059	81.309471
gps 47	32.021059	81.309471
gps 48	32.021059	81.309471
gps 49	32.021059	81.309471
gps 50	32.021059	81.309471
gps 51	32.021059	81.309471
gps 52	32.021059	81.309471
gps 53	32.021059	81.309471
gps 54	32.021059	81.309471
gps 55	32.021059	81.309471
gps 56	32.021059	81.309471
gps 57	32.021059	81.309471
gps 58	32.021059	81.309471
gps 59	32.021059	81.309471
gps 60	32.021059	81.309471
gps 61	32.021059	81.309471
gps 62	32.021059	81.309471
gps 63	32.021059	81.309471
gps 64	32.021059	81.309471
gps 65	32.021059	81.309471
gps 66	32.021059	81.309471
gps 67	32.021059	81.309471
gps 68	32.021059	81.309471
gps 69	32.021059	81.309471
gps 70	32.021059	81.309471
gps 71	32.021059	81.309471
gps 72	32.021059	81.309471
gps 73	32.021059	81.309471
gps 74	32.021059	81.309471
gps 75	32.021059	81.309471
gps 76	32.021059	81.309471
gps 77	32.021059	81.309471
gps 78	32.021059	81.309471
gps 79	32.021059	81.309471
gps 80	32.021059	81.309471
gps 81	32.021059	81.309471
gps 82	32.021059	81.309471
gps 83	32.021059	81.309471
gps 84	32.021059	81.309471
gps 85	32.021059	81.309471
gps 86	32.021059	81.309471
gps 87	32.021059	81.309471
gps 88	32.021059	81.309471
gps 89	32.021059	81.309471
gps 90	32.021059	81.309471
gps 91	32.021059	81.309471
gps 92	32.021059	81.309471
gps 93	32.021059	81.309471
gps 94	32.021059	81.309471
gps 95	32.021059	81.309471
gps 96	32.021059	81.309471
gps 97	32.021059	81.309471
gps 98	32.021059	81.309471
gps 99	32.021059	81.309471
gps 100	32.021059	81.309471

31

Location Services

Example – Obtain Location Coordinates – Manifest

```

<?xml version="1.0" encoding="utf-8"?>
<manifest xmlns:android="http://schemas.android.com/apk/res/android"
    package="cis493.mappinggps"
    android:versionCode="1"    android:versionName="1.0" >
    <uses-sdk android:minSdkVersion="8" />
    <uses-permission android:name="android.permission.INTERNET" />
    <uses-permission android:name="android.permission.ACCESS_FINE_LOCATION" />
    <application
        android:icon="@drawable/ic_menu_compass"
        android:label="@string/app_name"
        android:theme="@android:style/Theme.Holo.Light" >
        <activity
            android:name=".MyGPS"
            android:configChanges="orientation"
            android:label="@string/app_name"
            android:screenOrientation="portrait" >
            <intent-filter>
                <action android:name="android.intent.action.MAIN" />
                <category android:name="android.intent.category.LAUNCHER" />
            </intent-filter>
        </activity>
        <service android:name="MyGpsService" >
        </service>
    </application>
</manifest>

```

Location Services

Example – Obtain Coordinates - Main Activity: MyGps 1

```
// Request GPS location, show lat & long, optionally draw a map
package cis493.mappinggps;
import . . .

public class MyGPS extends Activity implements OnClickListener {
    TextView txtMsg;
    Button btnStopService;
    Button btnDrawGoogleMap;
    TextView txtTopMsg;

    ComponentName service;
    Intent intentMyService;
    BroadcastReceiver receiver;
    String GPS_FILTER = "cis470.action.GPS_LOCATION";
    double latitude;
    double longitude;
    String provider;

    @Override
    public void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.main);

        txtMsg = (TextView) findViewById(R.id.txtMsg);
        txtTopMsg = (TextView) findViewById(R.id.txtTopLine);
        findViewById(R.id.btnStopService).setOnClickListener(this);
        findViewById(R.id.btnStartService).setOnClickListener(this);
        findViewById(R.id.btnDrawMap).setOnClickListener(this);
    }
}
```

Location Services

Example – Obtain Coordinates - Main Activity: MyGps 2

```
getMyLocationServiceStarted();

// register & define filter for local listener
IntentFilter myLocationFilter = new IntentFilter(GPS_FILTER);
receiver = new MyMainLocalReceiver();
registerReceiver(receiver, myLocationFilter);
} // onCreate
// /////////////////////////////////
public void getMyLocationServiceStarted(){
    // get background service started
    txtMsg.append("\nMyGpsService started/restarted - (see LogCat)");
    intentMyService = new Intent(this, MyGpsService.class);
    service = startService(intentMyService);
}
// /////////////////////////////////
@Override
protected void onDestroy() {
    super.onDestroy();
    try {
        stopService(intentMyService);
        unregisterReceiver(receiver);
    } catch (Exception e) {
        Log.e ("MAIN-DESTROY>>>", e.getMessage());
    }
    Log.e ("MAIN-DESTROY>>>" , "Adios");
} // onDestroy
```

Location Services

Example – Obtain Coordinates - Main Activity: MyGps 3

```
// local RECEIVER
private class MyMainLocalReceiver extends BroadcastReceiver {
    @Override
    public void onReceive(Context localContext, Intent intentFilteredResponse) {
        latitude = intentFilteredResponse.getDoubleExtra("latitude",-1);
        longitude = intentFilteredResponse.getDoubleExtra("longitude",-1);
        provider = intentFilteredResponse.getStringExtra("provider");

        Log.e ("MAIN>>>", Double.toString(latitude));
        Log.e ("MAIN>>>", Double.toString(longitude));
        Log.e ("MAIN>>>", provider);

        String msg = provider
            + " lat: " + Double.toString(latitude) + " "
            + " lon: " + Double.toString(longitude);

        txtMsg.append("\n" + msg);
    }
} //MyMainLocalReceiver
```

35

Location Services

Example – Obtain Coordinates - Main Activity: MyGps 4

```
public void drawGoogleMap(double latitude, double longitude){

//    // this looks good on a big screen
//    String myGeoCode = "https://maps.google.com/maps?q="
//                    + latitude
//                    + ","
//                    + longitude
//                    + "(You are here!)&iwloc=A&hl=en";

// this looks better on a small screen
String myGeoCode = "geo:" + latitude
    + "," + longitude
    + "?z=15";

Intent intentViewMap = new Intent(Intent.ACTION_VIEW,
    Uri.parse(myGeoCode));

startActivity(intentViewMap);
}
```

36

Location Services

Example – Obtain Coordinates - Main Activity: MyGps 5

```

@Override
public void onClick(View v) {
    // stop service
    if (v.getId() == R.id.btnStopService) {
        try {
            stopService(new Intent(intentMyService));
            txtMsg.setText("After stopping Service: " +
                           service.getClassName());
            btnStopService.setText("Finished");
            btnStopService.setClickable(false);
        } catch (Exception e) {
            e.printStackTrace();
        }
        // draw a Google map with given coordinates
    } else if (v.getId() == R.id.btnDrawMap) {
        drawGoogleMap(latitude, longitude);
    // re-start service
    } else if (v.getId() == R.id.btnStartService) {
        getMyLocationServiceStarted();
    }
}

}//MyGPS

```

37

Location Services

Example – Obtain Coordinates – MyGpsService 1

```

// This is the GPS service. Requests location updates
// in a parallel thread. sends broadcast using filter.

package cis493.mappinggps;
Import ...
public class MyGpsService extends Service {

    String GPS_FILTER = "cis470.action.GPS_LOCATION";
    Thread serviceThread;
    LocationManager lm;
    GPSListener myLocationListener;
    boolean isRunning = true;

    @Override
    public IBinder onBind(Intent arg0) {
        return null;
    }

    @Override
    public void onCreate() {
        super.onCreate();
    }
}

```

38

Location Services

Example – Obtain Coordinates – MyGpsService 2

```

@Override
public void onStart(Intent intent, int startId) {

    Log.e("<<MyGpsService-onStart>>", "I am alive-GPS!");

    // we place the slow work of the service in a back thread
    serviceThread = new Thread(new Runnable() {
        public void run() {
            getGPSFix_Version1(); // coarse: network based
            getGPSFix_Version2(); // fine: gps-chip based
        }
    });

    serviceThread.start(); // get the thread going
}
// onStart

```

39

Location Services

Example – Obtain Coordinates – MyGpsService 3

```

public void getGPSFix_Version1() {
    // Get a location as soon as possible
    LocationManager locationManager = (LocationManager)
        getSystemService(Context.LOCATION_SERVICE);
    // work with best available provider
    Criteria criteria = new Criteria();
    String provider = locationManager.getBestProvider(criteria, false);
    Location location = locationManager.getLastKnownLocation(provider);

    if (location != null ) {
        // capture location data sent by current provider
        double latitude = location.getLatitude();
        double longitude = location.getLongitude();

        // assemble data bundle to be broadcasted
        Intent intentFilteredResponse = new Intent(GPS_FILTER);
        intentFilteredResponse.putExtra("latitude", latitude);
        intentFilteredResponse.putExtra("longitude", longitude);
        intentFilteredResponse.putExtra("provider", provider);
        Log.e(">>GPS_Service<<", provider + " =>Lat:" + latitude
            + " lon:" + longitude);

        // send the location data out
        sendBroadcast(intentFilteredResponse);
    }
}

```

Location Services

Example – Obtain Coordinates – MyGpsService 4

```

public void getGPSFix_Version2() {
    try {
        // using: GPS_PROVIDER
        // more accuracy but needs to see the sky for satellite fixing
        Looper.prepare();
        lm = (LocationManager) getSystemService(Context.LOCATION_SERVICE);

        // This listener will catch and disseminate location updates
        myLocationListener = new GPSListener();

        // define update frequency for GPS readings
        long minTime = 0; // best time: 5*60*1000 (5min)
        float minDistance = 5; // 5 meters

        // request GPS updates
        lm.requestLocationUpdates(LocationManager.GPS_PROVIDER,
            minTime,
            minDistance,
            myLocationListener);
        Looper.loop();
    } catch (Exception e) {
        e.printStackTrace();
    }
}

```

Location Services

Example – Obtain Coordinates – MyGpsService 4

```

@Override
public void onDestroy() {
    super.onDestroy();
    Log.e("<<MyGpsService-onDestroy>>", "I am dead-GPS");
    try {
        lm.removeUpdates(myLocationListener);
        isRunning = false;
    } catch (Exception e) {
        Toast.makeText(getApplicationContext(), e.getMessage(), 1).show();
    }
} // onDestroy

// /////////////////////////////////
private class GPSListener implements LocationListener {
    public void onLocationChanged(Location location) {
        // capture location data sent by current provider
        double latitude = location.getLatitude();
        double longitude = location.getLongitude();
        // assemble data bundle to be broadcasted
        Intent myFilteredResponse = new Intent(GPS_FILTER);
        myFilteredResponse.putExtra("latitude", latitude);
        myFilteredResponse.putExtra("longitude", longitude);
        myFilteredResponse.putExtra("provider", location.getProvider());
        Log.e(">>GPS_Service<<", "Lat:" + latitude + " Lon:" + longitude);
        // send the location data out
        sendBroadcast(myFilteredResponse);
    }
}

```

Location Services

Example – Obtain Coordinates – MyGpsService 5

```

public void onProviderDisabled(String provider) {
}

public void onProviderEnabled(String provider) {
}

public void onStatusChanged(String provider, int status, Bundle extras) {
}

}// GPSListener class

} // MyGpsService

```

43

Location Services

JARGON:



Bearing

is the angle (East-ward) between a line connecting two points (source, destination) and a north-south line, or *meridian*.

NMEA (National Marine Electronics Association)

The NMEA 2000 standard contains the requirements for the minimum implementation of a serial-data communications network to interconnect marine electronic equipment onboard vessels. Equipment designed to this standard will have the ability to share data, including commands and status, with other compatible equipment over a single signaling channel.

Reference: http://www.nmea.org/content/nmea_standards/white_papers.asp

UTC - Coordinated Universal Time

Is a time standard based on *International Atomic Time* (TAI) with leap seconds added at irregular intervals to compensate for the Earth's slowing rotation.

Visit: <http://www.time.gov/timezone.cgi?Eastern/d/-5/java>

44

Location Services




Keyhole Markup Language

Use Eclipse's DDMS > Emulator Control > KML tab to provide location data to your emulator using a KML file.

Example: File `my_location_data.kml` contains the following set of placemarks

```
<?xml version="1.0" encoding="UTF-8"?>
<kml xmlns="http://earth.google.com/kml/2.2">
<Placemark>
  <name>Station 46027</name>
  <description>Off the coast of Lake Earl</description>
  <Point>
    <coordinates>-124.38,41.85,0</coordinates>
  </Point>
</Placemark>
<Placemark>
  <name>Station 46020</name>
  <description>Outside the Golden Gate</description>
  <Point>
    <coordinates>-122.83,37.75,0</coordinates>
  </Point>
</Placemark>
<Placemark>
  <name>Station 46222</name>
  <description>San Pedro Channel</description>
  <Point>
    <coordinates>-118.31,33.61,0</coordinates>
  </Point>
</Placemark>
</kml>
```

Emulator Control Screenshot:

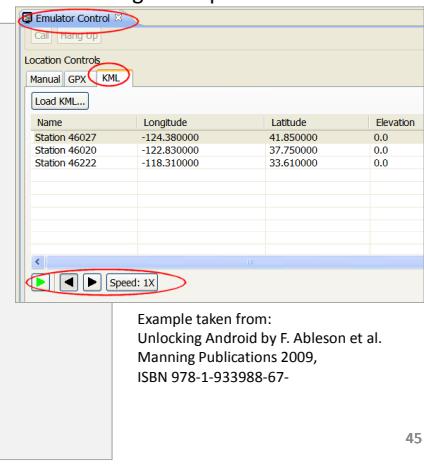

Name	Longitude	Latitude	Elevation
Station 46027	-124.380000	41.850000	0.0
Station 46020	-122.830000	37.750000	0.0
Station 46222	-118.310000	33.610000	0.0

Example taken from:
Unlocking Android by F. Ableson et al.
Manning Publications 2009,
ISBN 978-1-933988-67-

45

Location Services

Appendix: Skyhook Location Services

(Excerpts taken from www.skyhookwireless.com)

Skyhook's Core Engine is a software-only location system that quickly determines device location with 10 to 20 meter accuracy.

A mobile device with Skyhook's Core Engine collects raw data from each of the location sources (GPS, towers, wi-fi).

The Skyhook client then sends this data to the Location Server and a single location estimate is returned.

The client is optimized so that it communicates with the Location Server only when the location cannot be determined locally.

This behavior minimizes the user's data cost while maximizing battery life

46

Location Services

Appendix: Skyhook Location Services

www.skyhookwireless.com


"Skyhook's is a software-only location system that determines device location with 10 to 20 meter accuracy."

Skyhook's raw data comes from :

- **Wi-Fi access points,**
- GPS satellites and
- cell towers

Supported platforms include:

- Android
- Linux
- Mac OS X
- Windows

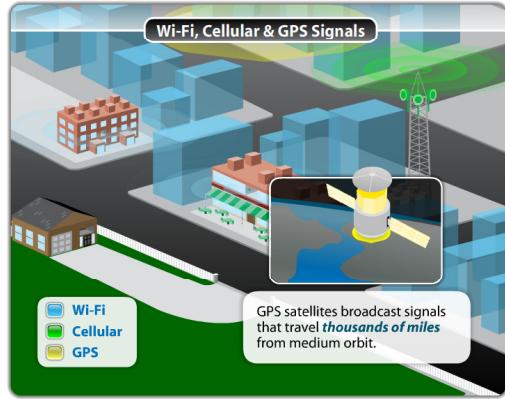

47

Location Services

Appendix: Skyhook Location Services www.skyhookwireless.com

PROS:

- Promises to work well in confined physical spaces (such as very developed urban areas)
- Better battery life (no need for constant GPS-chip readings)

CONS:

- Poor documentation available (Dec 2012)
- Unreliable at times (you may get very inaccurate fixes, or none at all)
- Not appropriate for rural areas, current coverage focuses mostly on USA and European cities.
- Vulnerable to spoofing location attacks (the attacker could convince the device to be in a false location. See <http://www.syssec.ch/press/location-spoofing-attacks-on-the-iphone-and-ipod>)

48

Location Services

Appendix: Skyhook Location Services www.skyhookwireless.com

Coverage Area (Dec 2012)

