

Towards achieving optimal semantic segmentation of inorganic nanoparticles in TEM-STEM images.





Daniel Groom¹





¹Department of Mechanical Engineering;

University of Texas at Austin


Austin, TX, 78712, USA



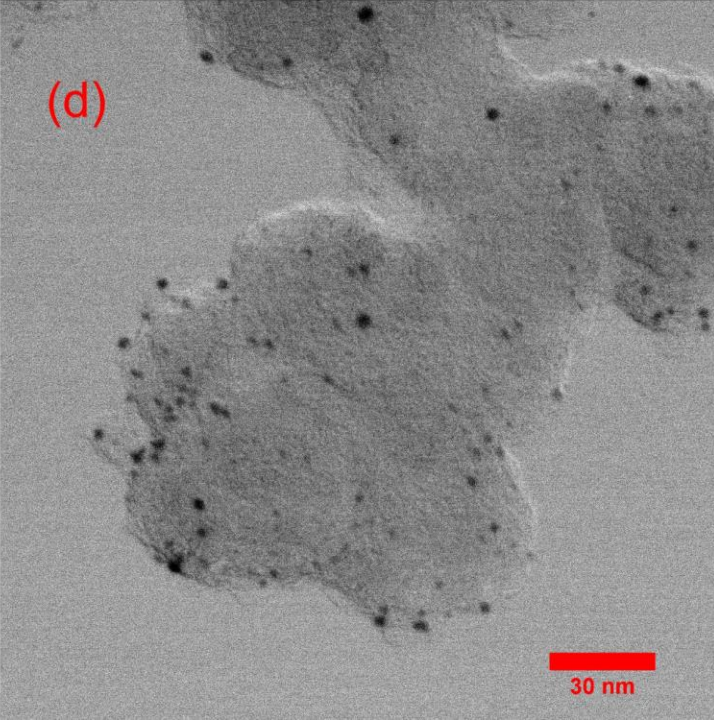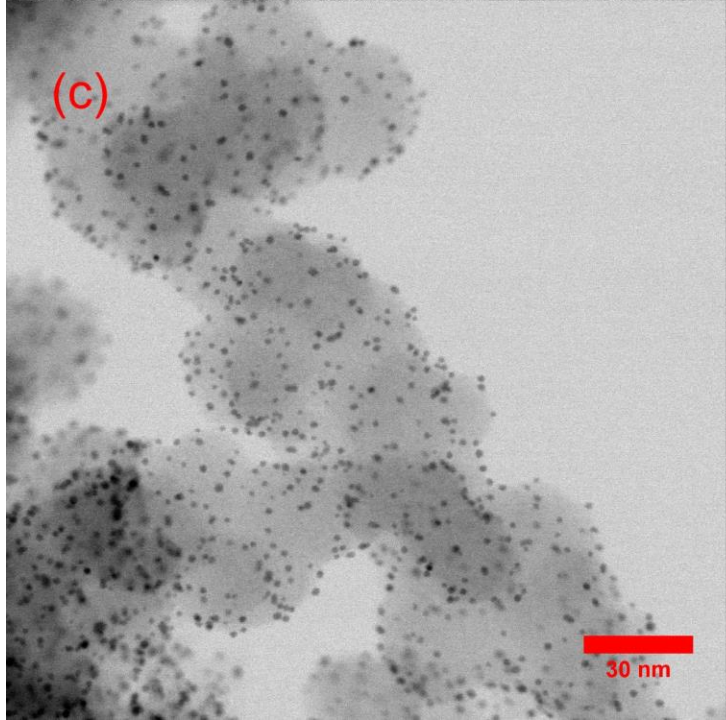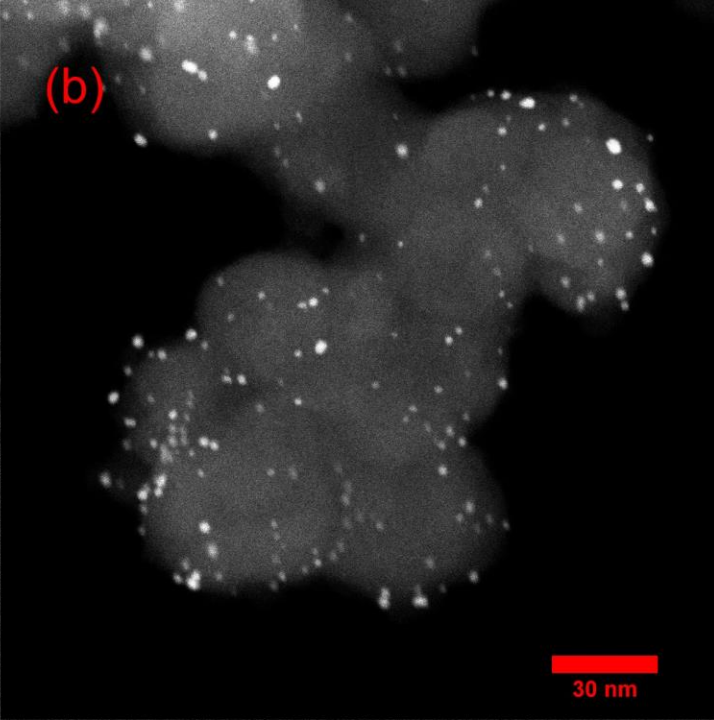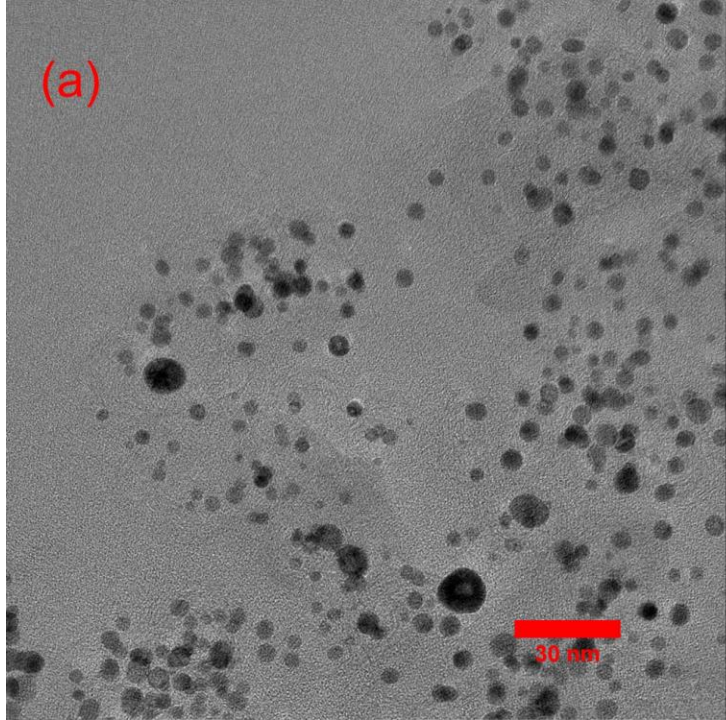

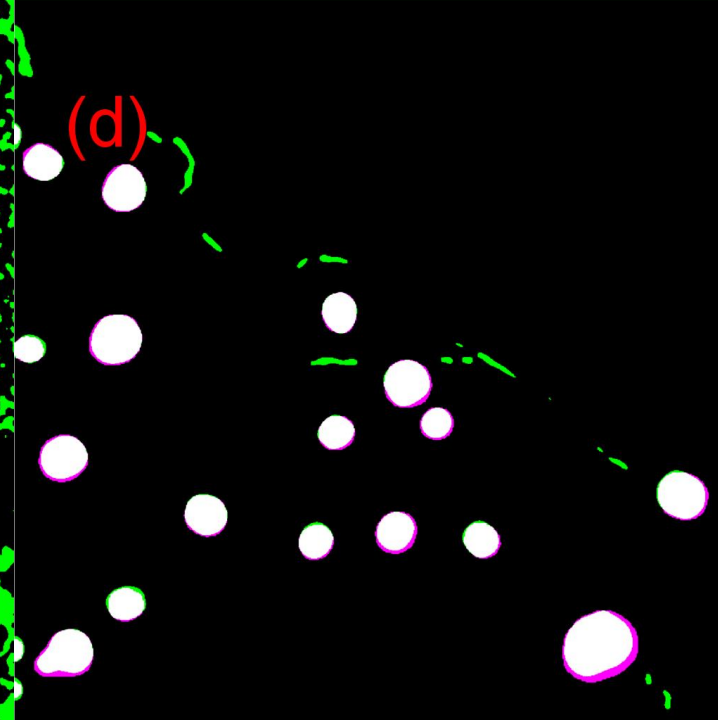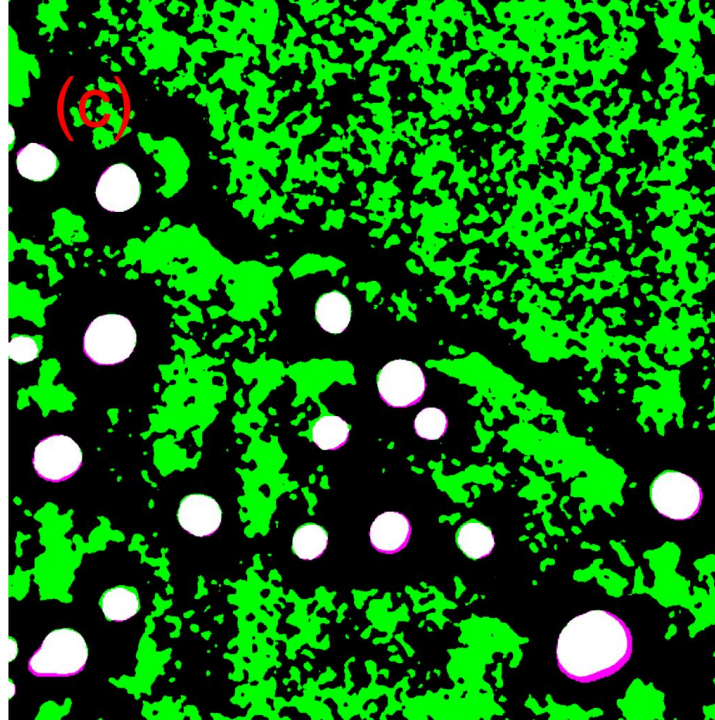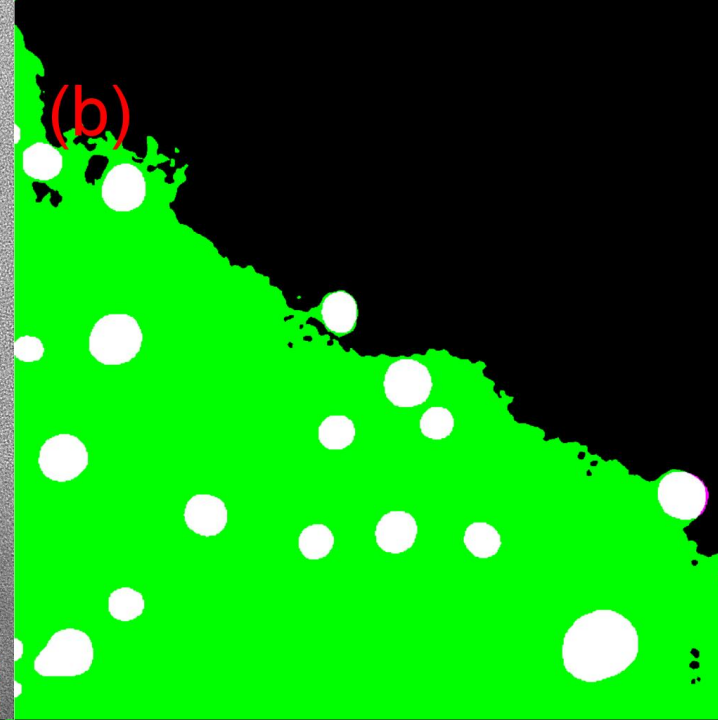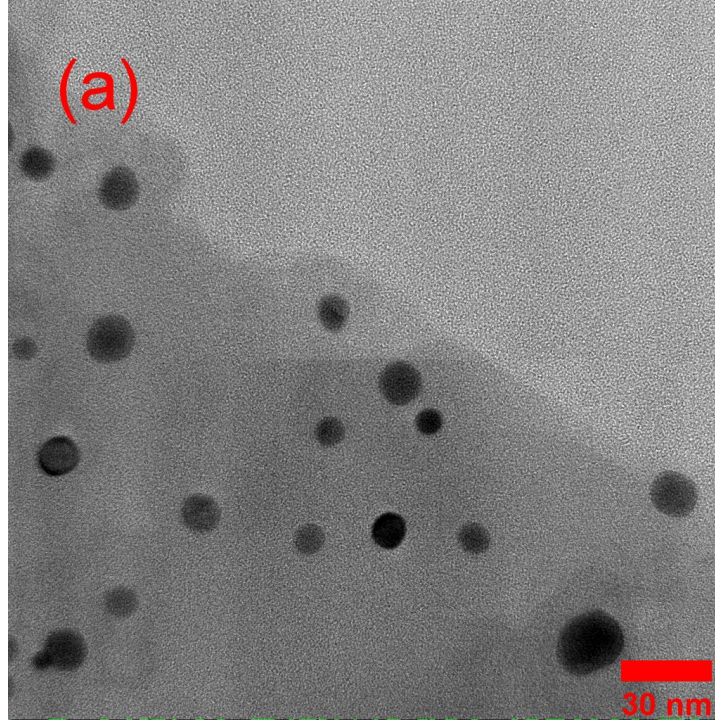

(a)

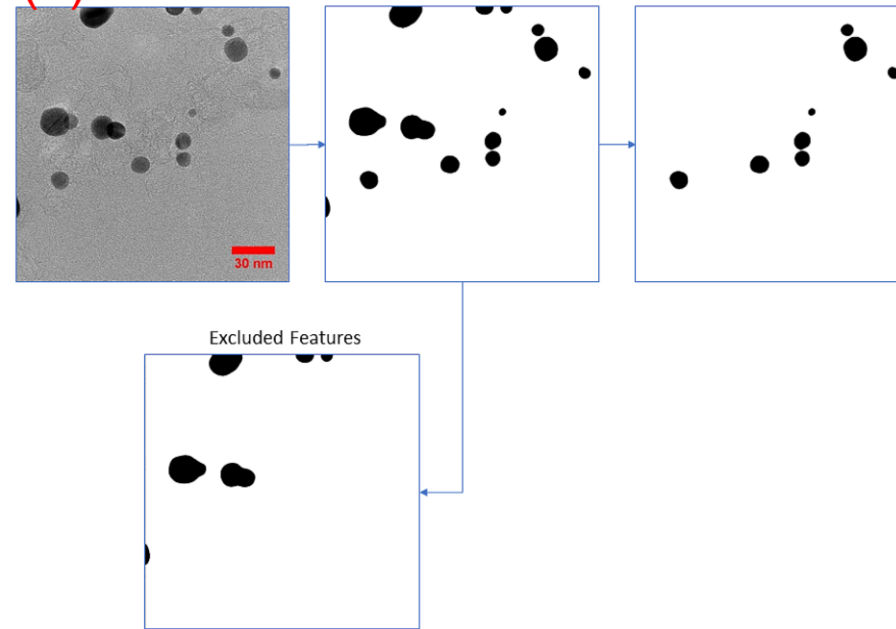

(b)

