

Операционные системы

Редактор Emacs

Крыловецкий Денис Витальевич

2026-04-09

Цели и задачи работы

Процесс выполнения лабораторной работы

Выводы по проделанной работе

1. Цели и задачи работы

Познакомиться с операционной системой Linux. Получить практические навыки работы с редактором Emacs.

1 Изучить возможности редактора Emacs

2. Процесс выполнения лабораторной работы

1. Откроем Emacs.

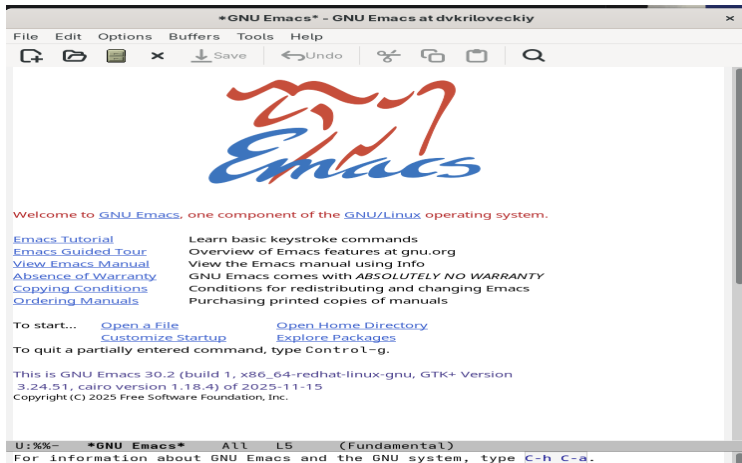


Рисунок 1: Запуск Emacs

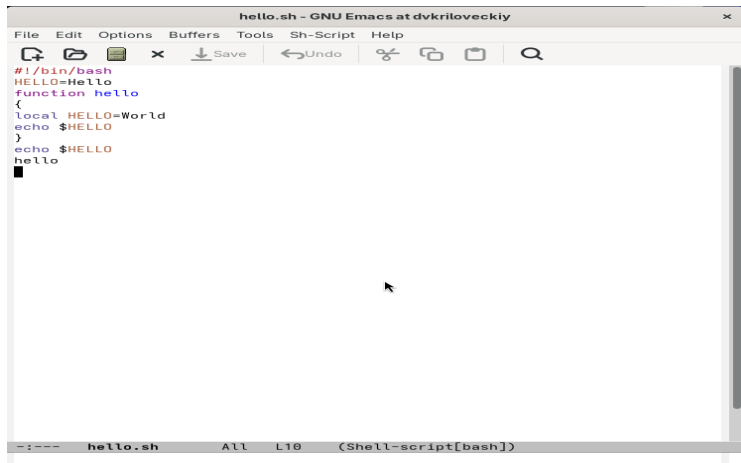


Рисунок 2: Новый файл

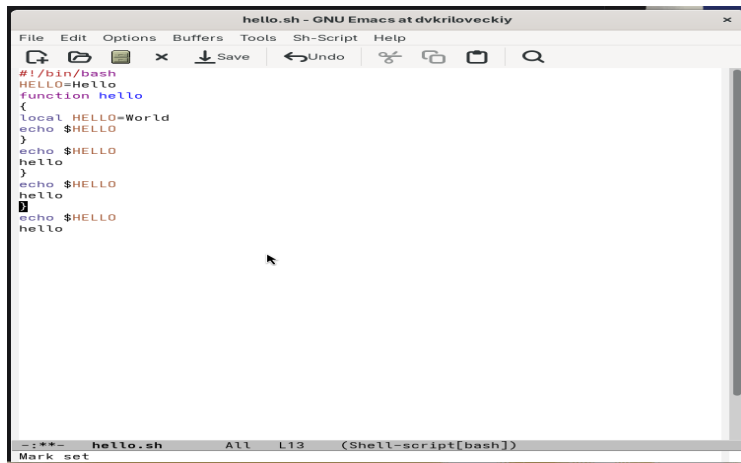


Рисунок 3: Операция вставка


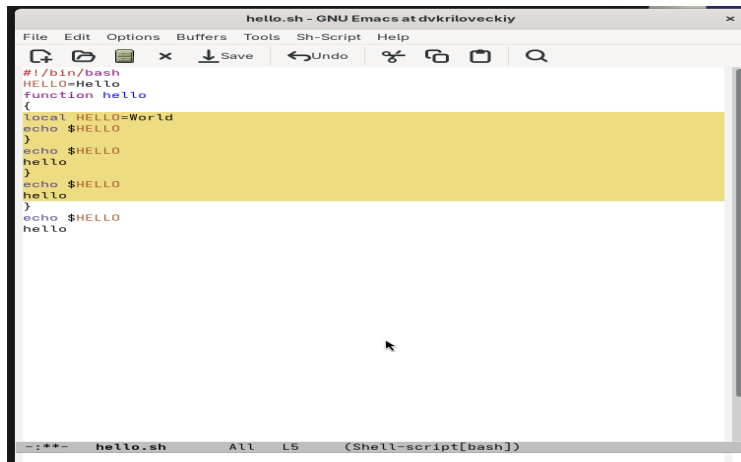


Рисунок 4: Выделение блока

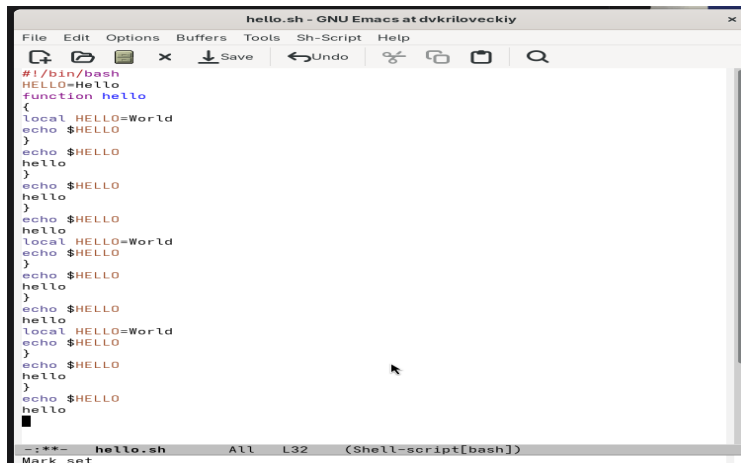

```
hello.sh - GNU Emacs at dvkriloveckiy
File Edit Options Buffers Tools Sh-Script Help
[Icons: Open, Save, Undo, Copy, Paste, Find]

#!/bin/bash
HELLO=Hello
function hello
{
  local HELLO=World
  echo $HELLO
}
echo $HELLO
hello
}
echo $HELLO
hello
}
echo $HELLO
hello
local HELLO=World
echo $HELLO
}
echo $HELLO
hello
}
echo $HELLO
hello
local HELLO=World
echo $HELLO
}
echo $HELLO
hello
}
echo $HELLO
hello

```

—:*** hello.sh All L32 (Shell-script[bash])
Mark set

Рисунок 5: Копирование блока

```
hello.sh - GNU Emacs at dvkritocheckiy
File Edit Options Buffers Tools Sh-Script Help
[Icons] Save Undo [Icons]
#!/bin/bash
HELLO=Hello
function hello
{
  local HELLO=World
  echo $HELLO
}
echo $HELLO
hello
}
echo $HELLO
hello
}
echo $HELLO
hello
local HELLO=World
echo $HELLO
}
echo $HELLO
hello
}
echo $HELLO
hello
█

-: * - hello.sh All L24 (Shell-script[bash])
Undo
```

Рисунок 6: Удаление блока


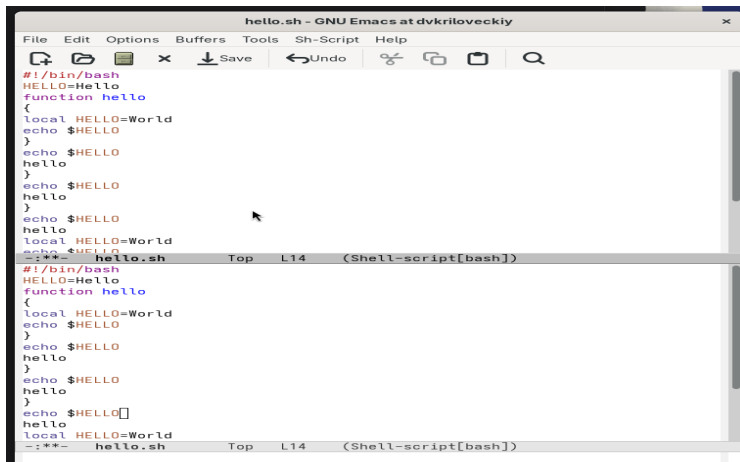


Рисунок 7: Горизонтальное разделение

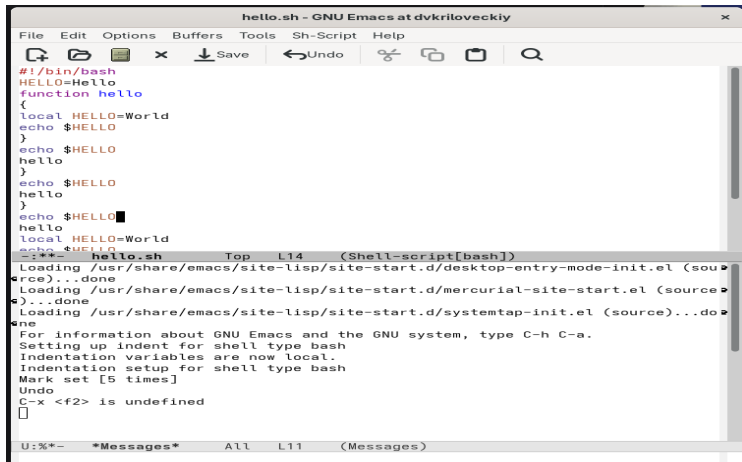

The screenshot shows the GNU Emacs editor window titled "hello.sh - GNU Emacs at dvkriloveckiy". The menu bar includes File, Edit, Options, Buffers, Tools, Sh-Script, and Help. The toolbar contains icons for file operations and editing. The main text area displays a shell script named "hello.sh" with the following content:


```
#!/bin/bash
HELLO=Hello
function hello
{
  local HELLO=World
  echo $HELLO
}
echo $HELLO
hello
}
echo $HELLO
hello
}
echo $HELLO
```

The cursor is positioned at the end of the last line of the script. Below the script, the output of the script's execution is shown in a separate buffer, indicating that the buffer has been switched. The output includes the following text:

```
--**-- hello.sh Top L14 (Shell-script[bash])
Loading /usr/share/emacs/site-lisp/site-start.d/desktop-entry-mode-init.el (source)...done
Loading /usr/share/emacs/site-lisp/site-start.d/mercurial-site-start.el (source)...done
Loading /usr/share/emacs/site-lisp/site-start.d/systemtap-init.el (source)...done
For information about GNU Emacs and the GNU system, type C-h C-a.
Setting up indent for shell type bash
Indentation variables are now local.
Indentation setup for shell type bash
Mark set [5 times]
Undo
C-x <f2> is undefined
[]
```

The status bar at the bottom of the window shows "U:%*- *Messages* All L11 (Messages)".

Рисунок 8: Переключение буфера

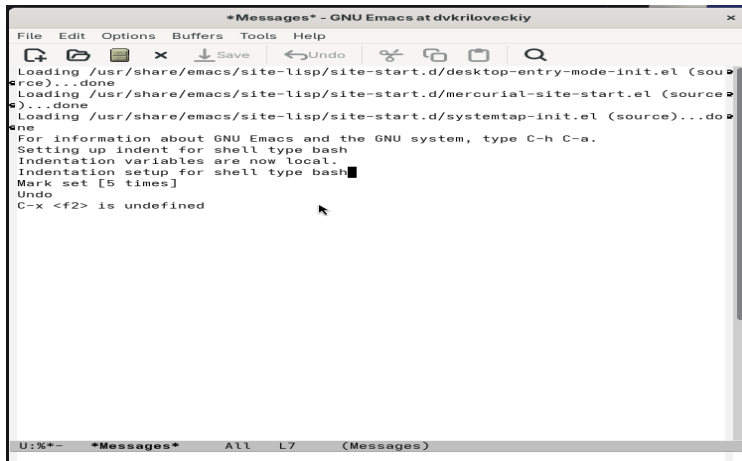

The image shows a screenshot of the GNU Emacs Messages buffer window. The window title is "*Messages* - GNU Emacs at dvkriloveckiy". The menu bar includes File, Edit, Options, Buffers, Tools, and Help. The toolbar contains icons for opening, saving, undo, redo, and search. The main text area displays the following messages:

```
Loading /usr/share/emacs/site-lisp/site-start.d/desktop-entry-mode-init.el (source)...done
Loading /usr/share/emacs/site-lisp/site-start.d/mercurial-site-start.el (source)...done
Loading /usr/share/emacs/site-lisp/site-start.d/systemtap-init.el (source)...done
For information about GNU Emacs and the GNU system, type C-h C-a.
Setting up indent for shell type bash
Indentation variables are now local.
Indentation setup for shell type bash
Mark set [5 times]
Undo
C-x <f2> is undefined
```

The status bar at the bottom shows "U:%*~ *Messages* All L7 (Messages)".

Рисунок 9: Закроем буфер

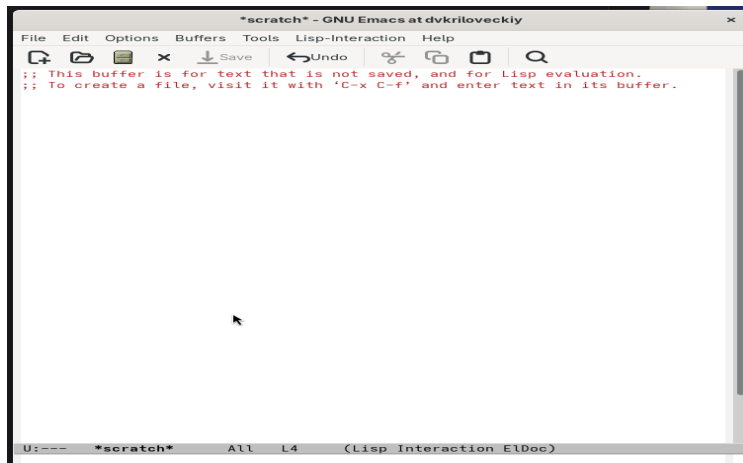


Рисунок 10: Переключение буфера

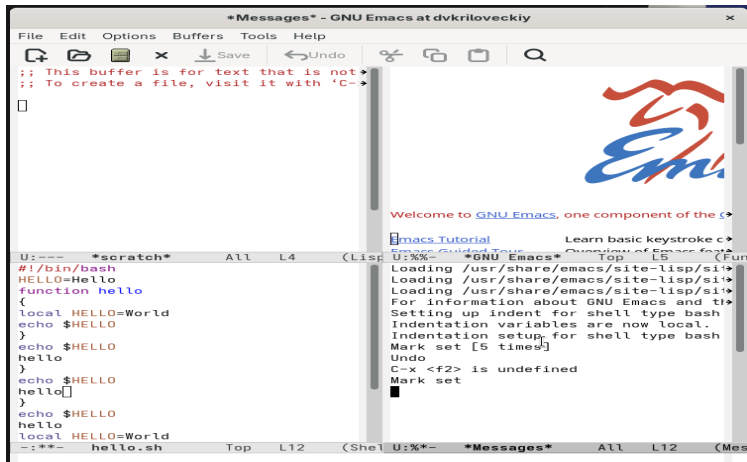


Рисунок 11: Четыре буфера

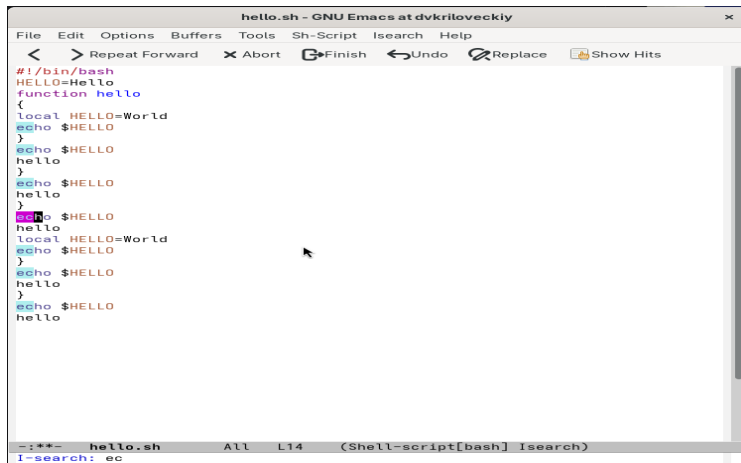


Рисунок 12: Режим поиска

3. Выводы по проделанной работе

В данной работе мы познакомились с еще одним редактором операционной системой Linux. Получили практические навыки работы с редактором Emacs.