Internet & SaaS (ZIA)

Configuring Advanced Policy Settings

Watch a video about Configuring Advanced Policy Settings (shows legacy UI).

To configure the advanced policy settings:

1. Go to **Policies** > **Access Control** > **URL Control** > **Advanced Settings**.
2. On the **Advanced Policy Settings** page.
3. Configure the following:

Enable CIPA Compliance

Enable this option to activate the predefined CIPA Compliance Rule. To learn more, see About CIPA Compliance.

> If you have exceeded the URL filtering policy rules limit, the following warning message appears:
>
> `You cannot enable CIPA compliance because you have reached the maximum number of URL filtering rules and the CIPA compliance rule cannot be auto-enabled for you. To enable CIPA compliance, you have to delete one of your URL filtering rules, and then enable CIPA compliance.`

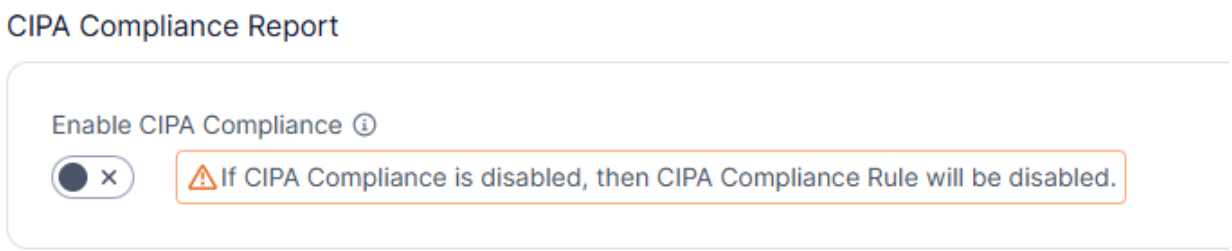

Enable Suspicious New Domains Lookup

Enable this option to provide advanced protection to users against the newly registered and observed domains that are identified within hours of going live. This feature also identifies newly revived domains. These domains are often considered potentially malicious until they are well-known or categorized. Identifying them improves the overall security posture. This feature is a prerequisite for using the Newly Registered and Observed Domains and Newly Revived Domains URL categories in a policy rule.

©2026 Zscaler, Inc. All rights reserved.

Zscaler recommends enabling SSL/TLS inspection for these URL categories.

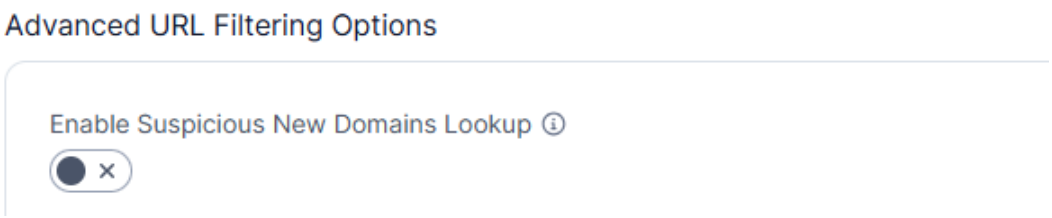

Enable 3rd-Party URL Category Lookup

Enable this option if you want the service to perform URL category lookups for uncategorized URLs using a third-party database.

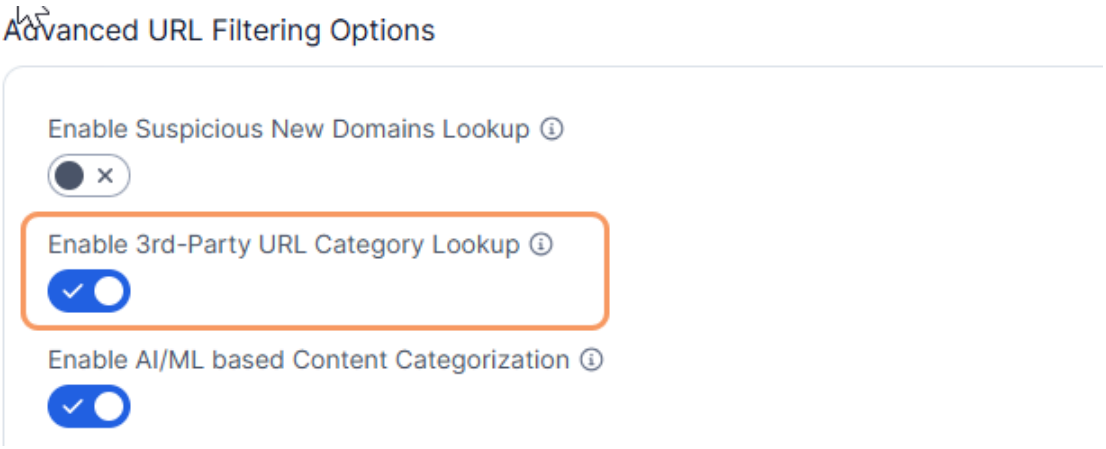

Enable AI-/ML-Based Content Categorization

Enable this option if you want the service to analyze the content of uncategorized websites using AI/ML tools to identify whether they belong to one of the predefined URL categories.

If the service determines that a site belongs to a category, then it categorizes the site to that category and applies the corresponding policies. When AI-/ML-based content categorization is enabled, the handling of transactions depends on the HTTP response codes received from the website server.

For example:

- **Redirect responses (3xx):** If the policy is set to block a category (e.g., Gambling), but the server responds with a redirect (3xx response code), then Zscaler allows the transaction to proceed and follows the redirect.

©2026 Zscaler, Inc. All rights reserved.

- **Server error responses (5xx):** If the server returns a response code indicating a server error (5xx), then Zscaler logs the transaction as allowed.
- **Other response codes:** For all other response codes, Zscaler blocks or allows the site based on your configured policy for the identified category.



Enable Embedded Sites Categorization

Enable this option to allow the service to enforce the URL filtering policy for sites that are translated using translation service websites. For example, when this feature is enabled, if you have a policy that blocks www.gambling.com, and a user translates the page to another language using Google Translate, the service blocks the translated page.



Enforce SafeSearch

Enable this option if you want the service to return only safe content from searches. When SafeSearch is enabled, the following field appears:

SafeSearch Applications: Choose any of the following applications to which you want to apply SafeSearch:

- AOL
- Bing Search
- Dailymotion
- DuckDuckGo
- Flickr
- Google
- Yahoo
- YouTube

SSL/TLS Inspection must be enabled for this option.

©2026 Zscaler, Inc. All rights reserved.

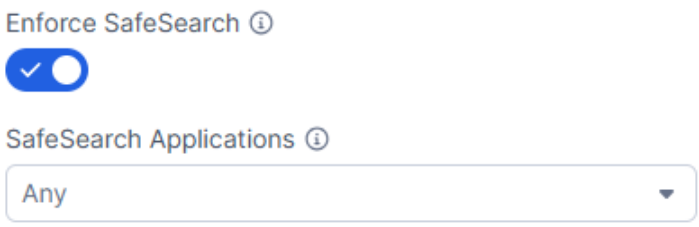

Enable Creative Commons Search Results

Enable this option if you want the service to return only Creative Commons search content from the following search engines:

- Bing
- Google
- Yahoo

> This option is disabled by default.



Enable Identity-Based Block Override

Enable this option to allow authorized users to provide temporary access to the blocked pages by using company-provided credentials such as the single sign-on credentials.

In companies that have SAML authentication and the Enable Identity-Based Block Override option activated:

- Unauthorized users (e.g., students) are temporarily allowed to access the blocked pages if authorized users (e.g., teachers) reauthenticate for them in the SAML reauthentication prompt.
- Authorized users (e.g., teachers) are temporarily allowed to access the blocked pages if they reauthenticate in the SAML reauthentication prompt.

©2026 Zscaler, Inc. All rights reserved.

Ensure that SAML Identity Provider (IdP) force reauthentication is enabled on the IdP side for the SAML reauthentication prompt to appear when you override the blocked pages. All other IdPs either don't support force reauthentication or support force reauthentication without any additional configuration.

If your company uses Okta IdP, ensure to clear the **Disable Force Authentication** option under the **Sign On** tab in the Okta SAML 2.0 application to enable forced reauthentication.

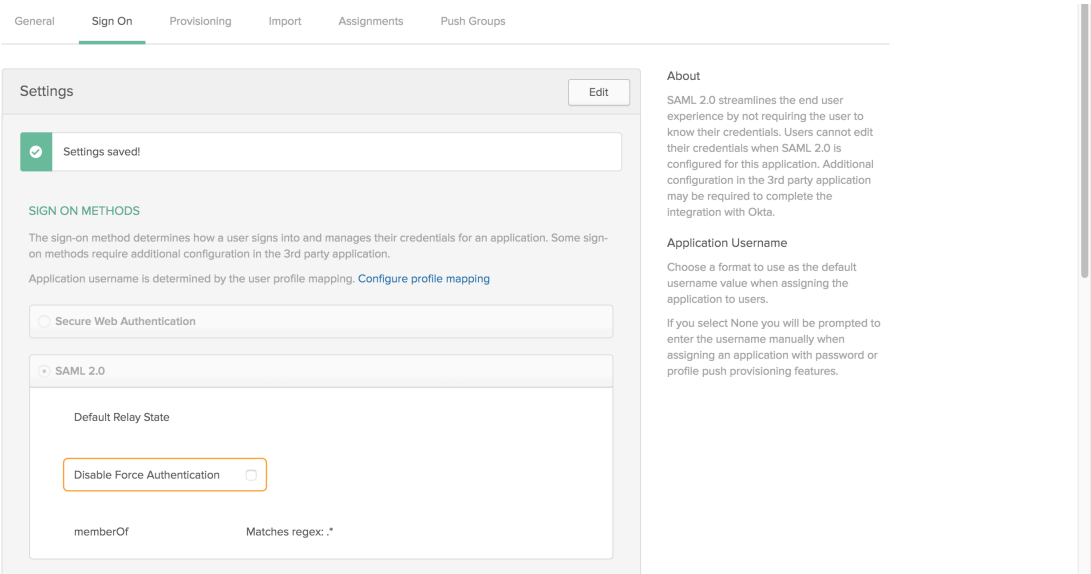

If you disable this option, the default block override behavior (hosted database) is applied. To learn more, see Configuring the URL Filtering Policy.



Enable Microsoft-Recommended One Click Office 365 Configuration

Enabling this option allows Zscaler to enable local breakout for Microsoft 365 traffic automatically without any manual configuration needed by customers. Enabling this option turns off SSL/TLS Interception for all Microsoft 365 destinations as per Microsoft's recommendation. If you want to continue using existing granular controls for Microsoft 365,

©2026 Zscaler, Inc. All rights reserved.

disable this option and enable the pre-existing configuration. To learn more, see About Microsoft One Click Options.

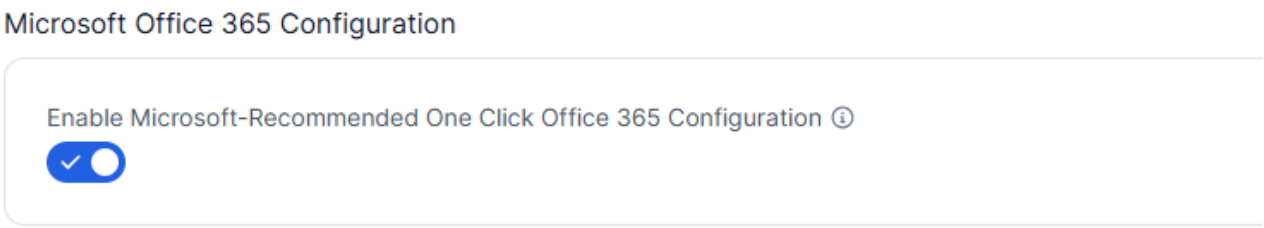

Unified Communications as a Service (UCaaS)

UCaaS is a cloud delivery model that offers communications and audio/video-based collaboration services. It's rapidly being adopted by enterprises of all sizes. Zscaler enables direct-to-cloud access for UCaaS applications like Zoom, GoTo, RingCentral, Webex, and Talkdesk by enabling organizations to send traffic directly to application servers over the internet, instead of backhauling traffic over costly Multiprotocol Label Switching (MPLS) circuits.

Zscaler simplifies your UCaaS deployment by taking advantage of our global direct-to-cloud network, which improves user experience and application performance for your organization. If your organization uses any of the UCaaS applications, you can send all traffic from all your locations, including remote user traffic, through the Zscaler service. The Zscaler service provides a One-Click Configuration option for UCaaS apps which allows Zscaler to identify and map all IP ranges and domains, including ports and protocols for secure connectivity and better user experience. Zscaler partnered with all major UCaaS vendors (Zoom, GoTo, RingCentral, Webex, and Talkdesk) and leverages the REST-based web services to keep this mapping up to date dynamically.

Enabling the **Zoom**, **GoTo**, **RingCentral**, **Webex**, or **Talkdesk** option allows Zscaler to permit secure local breakout for their traffic automatically, without any manual configuration needed. When either option is enabled, it turns off SSL/TLS interception for all Zoom, GoTo, RingCentral, Webex, or Talkdesk destinations. To continue using existing granular controls for Zoom, GoTo, RingCentral, Webex, or Talkdesk, disable the respective option, and enable cloud application and firewall network application policies accordingly.

Also, when either option is enabled, a **UCaaS One Click Rule** is automatically created in the following policies:

©2026 Zscaler, Inc. All rights reserved.

- Firewall Control Policy and DNS Control Policy: The rule is created to allow traffic from firewall.
- Cloud App Control Policy: The rule is created under the Collaboration & Online Meetings category to allow traffic destined to the Zoom, GoTo, RingCentral, Webex, or Talkdesk UCaaS applications.

> The Webex Connect application is not part of the Webex option.

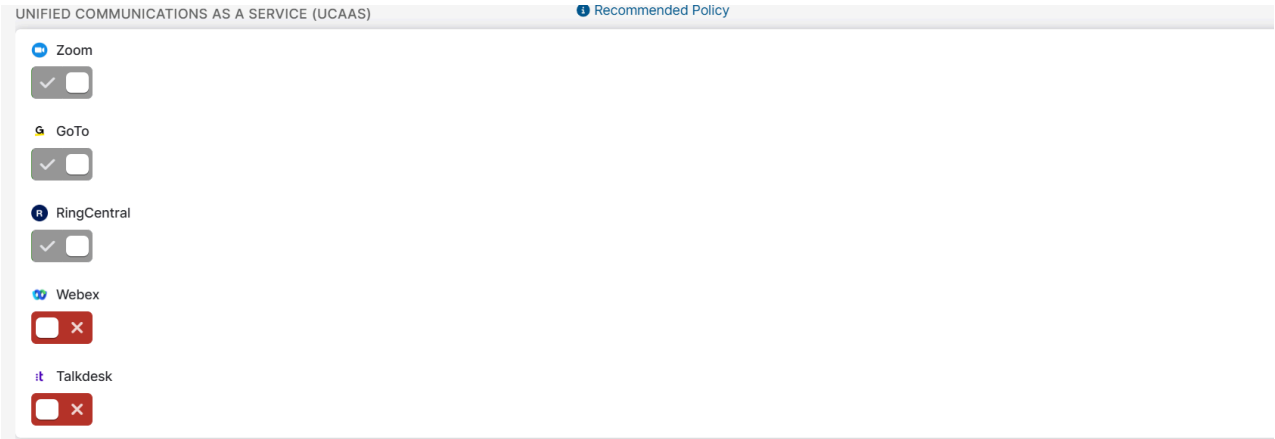

Gen AI Prompt Configuration

Generative AI (Gen AI) prompts are a series of instructions that are provided as input to Gen AI applications to get the desired response from them. The Zscaler service categorizes and stores prompts for Gen AI applications. Enabling the following options allows Zscaler to categorize and store the prompts for the respective applications:

- ChatGPT
- Microsoft Copilot
- Gemini
- Perplexity
- Poe
- Meta AI
- WRITER
- DeepSeek
- Grok AI
- Claude
- Mistral
- Grammarly

©2026 Zscaler, Inc. All rights reserved.

- QuillBot
- Google AI

The prompts for these applications are logged on the Web Insights Logs page.

> The Zscaler service stores prompts up to a maximum of 2 KB in size for these applications. Prompts for the Microsoft Copilot application are stored only if the user is not authenticated to it.

To apply DLP WebSocket policies and capture prompts for Microsoft Copilot, Zscaler recommends users to:

a. Create a custom URL category for substrate.office.com and copilot.microsoft.com for SSL/TLS Inspection. To learn more, see Configuring Custom URL Categories.
b. Create a new SSL/TLS Inspection policy for the custom category above the OneClick SSL/TLS Inspection policy. To learn more, see Configuring SSL/TLS Inspection Policy.

> Zscaler's DLP inspection and prompt capture capabilities are currently limited to Microsoft Copilot Chat. Support for Microsoft Copilot embedded within Microsoft Office applications is currently unavailable.

©2026 Zscaler, Inc. All rights reserved.

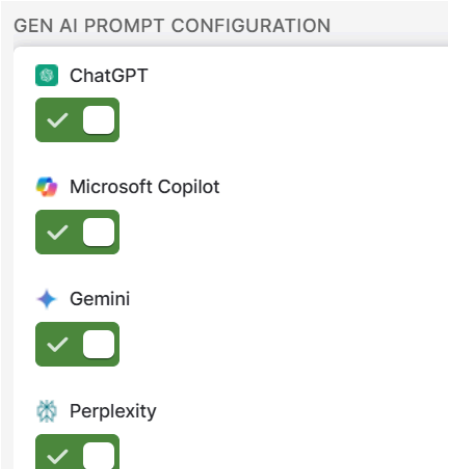

©2026 Zscaler, Inc. All rights reserved.