Private Access (ZPA)

Using Application Segment Multimatch

Multimatch allows an application request to match multiple application segments. When a user tries to access a private application without Multimatch, a request is mapped to an application segment. After the application is mapped to an application segment, the policy search is performed, and the request is either allowed or blocked based on the policy configuration.

Private Access (ZPA) evaluates Multimatch across all application segments that include the same applications. When an administrator enables or disables Multimatch for an application segment, Private Access checks all other application segments that contains any overlapping domains to determine whether the change is allowed. If a domain is found in multiple application segments with different Multimatch settings, there is a conflict and the application segment cannot be updated.

To learn more, see About Access Policy and Configuring Access Policies.

Prerequisites

To use application segment Multimatch, ensure the following:

- App Connectors or Private Service Edges for Private Access are upgraded to version 24.298.1 or later.
- Zscaler Client Connector is upgraded to the following versions per OS:
  - Windows versions:
    - 4.7.0.88 or later
    - 4.6.0.282 or later
  - macOS versions: 4.5.2.98 or later
  - iOS version 4.4.1 or later
    To use the Private Access Multimatch feature for iOS applications, you must enable the **Use Tunnel SDK Version 4.3 or above** setting in the Zscaler Admin Console.

©2026 Zscaler, Inc. All rights reserved.

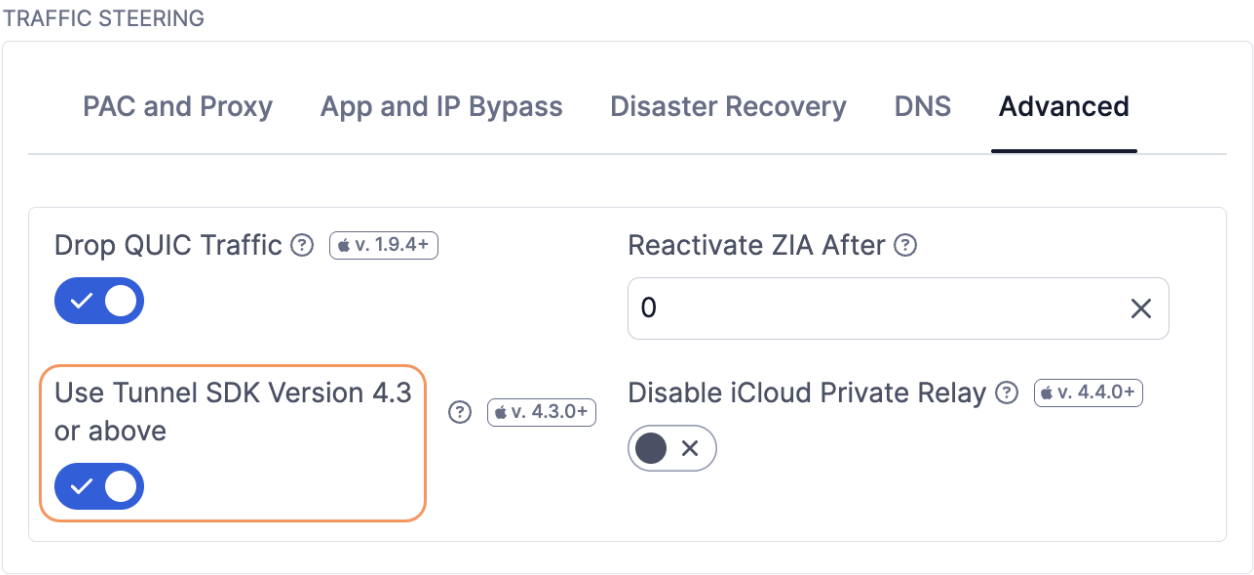

- Android version: 3.10 or later
- Linux version: 4.2 or later

Using Multimatch

By default, after a specific FQDN is configured in an application segment, the destination is removed from the wildcard application segment. The default behavior can cause unwanted access failure due to the destination matching a more specific application segment that does not have the UDP or TCP ports defined. Multimatch allows admins to create new application segments without the risk of unwanted access failure if a user attempts to access a FQDN with undefined ports. After Multimatch is enabled, the wildcard application segment catches all UDP or TCP ports that are not configured in the more specific application segment. When you have decided what application segments you want matched, you can enable Multimatch for that application segment. To learn more, see Configuring Defined Application Segments.

> ⚠ Multimatch must be disabled if the configuration contains applications using the Access Type of Browser Access, AppProtection, or Privileged Remote Access. Additionally, Multimatch must be disabled if the configuration contains applications using Double Encryption, Inspect Traffic with Internet & SaaS (ZIA), and Source IP Anchor. To learn more, see Configuring Defined Application Segments.

Multimatch Validation for Application Segments

©2026 Zscaler, Inc. All rights reserved.

When Multimatch is enabled, a Multimatch Validation window appears for you to review any impacted application segments and conflicting features. If there is a conflicting feature, a warning appears.

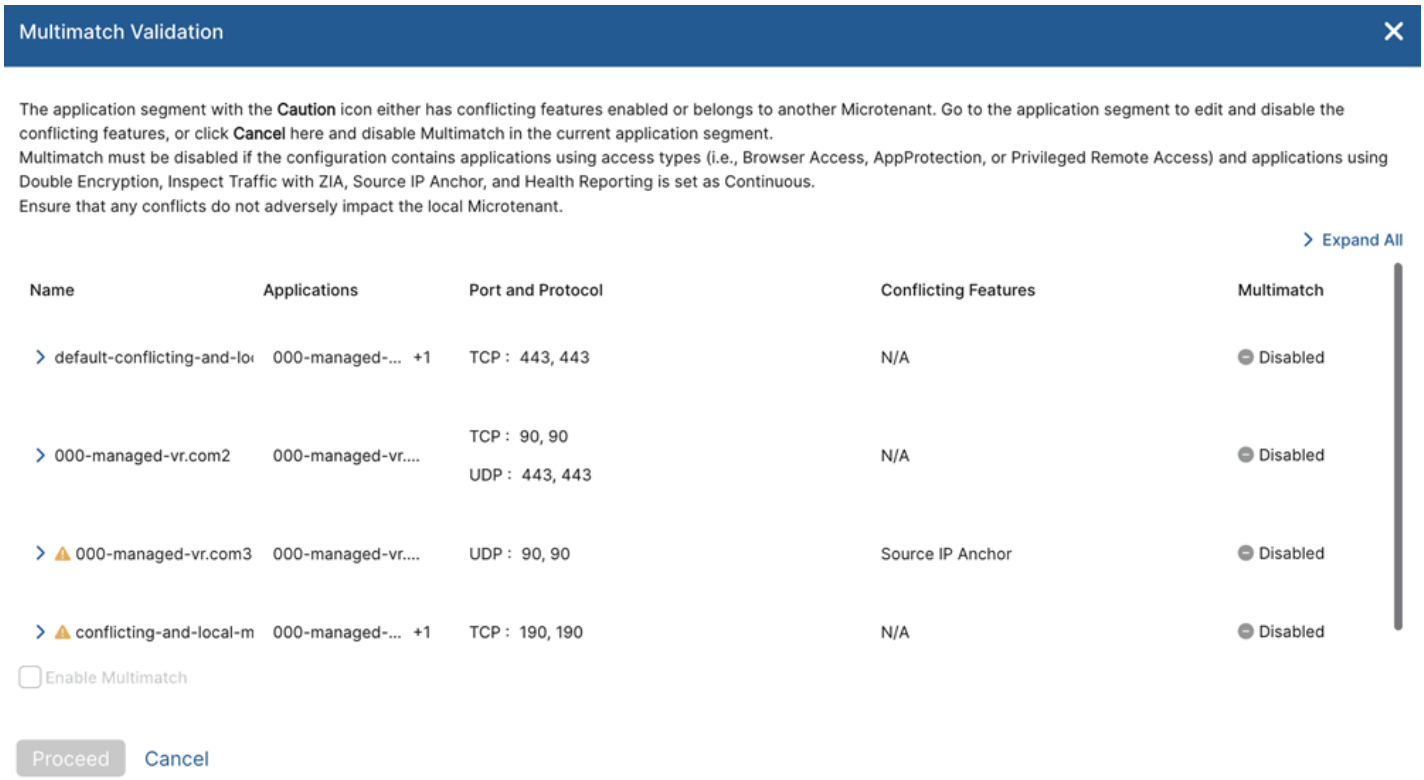

Depending on the application segments selected, you can resolve the issue by doing one of the following:

- Edit an application segment and disable unsupported features.
- Review conflicting features in a local Microtenant and select the checkboxes that appear.
- Contact the default administrator when Multimatch includes the default application segment.
- Cancel and disable Multimatch if an application segment belongs to another local tenant.

Exact Match vs. Multimatch

There are two application match behaviors available in Private Access: Exact Match and Multimatch. Exact match is the default behavior.

About Exact Match

The default behavior of Private Access is to perform an exact match of applications. If two or more application segments cover the same destination address, Zscaler Client Connector attempts to match

©2026 Zscaler, Inc. All rights reserved.

traffic to the more granular application segment. Consider the following example of two application segments with the overlapping domain name example.com:

- Example: Exact Match

  If a user attempts to access server1.example.com on TCP port 3389, the destination address maps to the more specific application segment, which is Server1_AS. However, the Server1_AS application segment does not have TCP port 3389 configured, resulting in failed access.

Application Segment Name	Application	Protocol	Ports
Wildcard_AS	*.example.com	TCP, UDP	1 to 52, 54 to 65535
Server1_AS	server1.example.com	TCP	443

  In this scenario, the attempt to access server1.example.com on TCP port 3389 is dropped at the client level, traffic is not sent to the Private Access cloud, and logs aren't visible in the diagnostics. After a specific FQDN (Fully Qualified Domain Name) has been configured in an application segment, it is removed from the wildcard application segment by default. Even though server1.example.com is part of the Wildcard_AS application segment for the *example.com application on the TCP port range of 54 to 65535, this access does not match the Wildcard_AS application segment. To fix this, TCP port 3389 must be configured for the Server1_AS application segment, or Multimatch can be enabled. Enabling Multimatch changes the behavior of the wildcard application segment, and catches access to ports that have not been defined in the more specific FQDN application segment.

About Multimatch

The following examples illustrate how applications are mapped to application segments, as well as how policy execution works when Multimatch is enabled or not enabled on application segments.

- Multiple application segment matches

  The primary use for Multimatch is when there are multiple possible application segment matches. The following tables show application segment configuration, the policy configuration, and how they match up.

©2026 Zscaler, Inc. All rights reserved.

Application Segment Configuration

Application Segment Name	Application	Protocol	Ports	Multimatch
Wildcard_AS	*.example.com	TCP, UDP	1 to 52, 54 to 65535	Enabled
Server1_AS	server1.example.com	TCP	443, 3389	Enabled

Access Policy Configuration

#	Access Policy Name	Application Segment Name	Policy Action	User Group
1	Allow Server1_AS for Admin	Server1_AS	Allow	Admin_Grp
2	Allow Wildcard_AS for All	Wildcard_AS	Allow	All

Application Match and Policy Search Results

User	Group	FQDN: Protocol & Port	Matched Application Segment with Multimatch	Matched Application Segment without Multimatch	Matched Policy with Multimatch	Matched Policy Number without Multimatch
user1	Admin_Grp	server1.example.com: TCP+3389	Wildcard_AS Server1_AS	Server1_AS	Allow Server_AS for All (#1)	Allow Server1_AS for Admin (#1)
user2	IT_Grp	server1.example.com:	Wildcard_AS	Server1_AS	Allow Wildcard_A	No policy match.

©2026 Zscaler, Inc. All rights reserved.

Application Match and Policy Search Results

User	Group	FQDN: Protocol & Port	Matched Application Segment with Multimatch	Matched Application Segment without Multimatch	Matched Policy with Multimatch	Matched Policy Number without Multimatch
		TCP+3389	Server1_AS		S for All (#2)	Blocked by implicit default block policy.
user1	Admin_Grp	server1.example.com: TCP+22	Wildcard_AS	N/A	Allow Wildcard_AS for All (#2)	Traffic is dropped at the client level
user2	IT_Grp	server1.example.com: TCP+22	Wildcard_AS	N/A	Allow Wildcard_AS for All (#2)	Traffic is dropped at the client level
user3	IT_Grp	server1.example.com: TCP+80	Wildcard_AS	N/A	Allow Wildcard_AS for All (#2)	Traffic is dropped at the client level
user3	IT_Grp	server1.example.com: TCP+443	Wildcard_AS Server1_AS	Server1_AS	Allow Wildcard_AS for All (#2)	No policy match. Blocked by implicit default block policy.

©2026 Zscaler, Inc. All rights reserved.

Traffic that is dropped at the client level means that traffic matches the hostname, but it does not match the protocol and port. In this condition, traffic is not sent to the cloud for further processing. This means that policy evaluation does not occur, and the user is not able to access the application segment. In this case, traffic is not visible in the Private Access diagnostics.

Behavior after inserting a block rule

The following table shows how the policy search results change by inserting a block policy in the rule set.

Application Segment Configuration

Application Segment Name	Application	Protocol	Ports	Multimatch
Wildcard_AS	*.example.com	TCP, UDP	1 to 52, 54 to 65535	Enabled
Server1_AS	server1.example.com	TCP	443, 3389	Enabled

Access Policy Configuration

#	Access Policy Name	Application Segment Name	Policy Action	User Group
1	Allow Server1_AS for Admin	Server1_AS	Allow	Admin_Grp
2	Block Server1_AS for All	Server1_AS	Block	All
3	Allow Wildcard_AS for All	Wildcard_AS	Allow	All

©2026 Zscaler, Inc. All rights reserved.

Application Match and Access Policy Search Results

User	Group	FQDN: Protocol & Port	Matched Application Segment with Multimatch	Matched Application Segment without Multimatch	Matched Policy Number with Multimatch	Matched Policy Number without Multimatch
user1	Admin_Grp	server1.example.com: TCP+3389	Wildcard_AS Server1_AS	Server1_AS	Allow Server1_AS for Admin (#1)	Allow Server1_AS for Admin (#1)
user1	Admin_Grp	server1.example.com: TCP+443	Wildcard_AS Server1_AS	Server1_AS	Allow Server1_AS for Admin (#1)	Allow Server1_AS for Admin (#1)
user1	Admin_Grp	server1.example.com: TCP+22	Wildcard_AS	N/A	Allow Wildcard_AS for All (#3)	Traffic is dropped at the client level
user2	IT_Grp	server1.example.com: TCP+22	Wildcard_AS	N/A	Allow Wildcard_AS for All (#3)	Traffic is dropped at the client level
user3	IT_Grp	server1.example.com: TCP+80	Wildcard_AS	N/A	Allow Wildcard_AS for All (#3)	Traffic is dropped at the client level
user3	IT_Grp	server1.example.com: TCP+443	Wildcard_AS Server1_AS	Server1_AS	Block Server1_AS for All (#2)	Block1_AS for All (#2)

©2026 Zscaler, Inc. All rights reserved.

Traffic that is dropped at the client level means that traffic matches the hostname, but it does not match the protocol and port. In this condition, traffic is not sent to the cloud for further processing. This means that policy evaluation does not occur, and the user is not able to access the application segment. In this case, traffic is not visible in the Private Access diagnostics.

Matched vs. Not Matched

Multiple matches apply to applications from most specific to least specific. As soon as an application is encountered that does not support Multimatch, the multimatching stops. The following examples show each possible outcome for matched and not matched results:

Example 1

Application Match			
Application	Multimatch	Requested Domain	
		server1.db.hr.company.com	server2.ui.hr.company.com
*.db.hr.company.com	Enabled	Matched	Not matched
*.ui.hr.company.com	Disabled	Not matched	Matched
*.hr.company.com	Enabled	Matched	Not matched
*.company.com	Disabled	Not matched	Not matched

Example 2

Application Match		
Application	Multimatch	Requested Domain
		server1.db.hr.company.com
server1.db.hr.company.com	Enabled	Matched
*.db.hr.company.com	Enabled	Matched
*.hr.company.com	Enabled	Matched

©2026 Zscaler, Inc. All rights reserved.

Application Match		
*.company.com	Disabled	Not matched
*.com	Enabled	Not matched

Example 3

Application Match			
Application	Multimatch	Requested Domain	
		server1.db.hr.company.com	server2.db.hr.company.com
server1.db.hr.company.com	Disabled	Matched	Not matched
*.db.hr.company.com	Enabled	Not matched	Matched
*.hr.company.com	Enabled	Not matched	Matched
*.company.com	Disabled	Not matched	Not matched

Example 4

Application Match		
Application	Multimatch	Requested Domain
		server2.ui.hr.company.com
server2.ui.hr.company.com	Enabled	Matched
*.ui.hr.company.com	Disabled	Not matched
*.hr.company.com	Enabled	Not matched
*.company.com	Disabled	Not matched

About IP Address- and IP Subnet-Based Multimatch

Even with an IP address, the default behavior of Private Access is to perform an exact match of applications. If two or more application segments cover the same destination address, Zscaler Client

©2026 Zscaler, Inc. All rights reserved.

Connector attempts to match traffic to the more granular application segment. Consider the following examples of two application segments with overlapping IP addresses:

Example: IP-Based Exact Match

Application	Applications	Protocol	Port
Subnet_AS	10.0.0.0/24	TCP, UDP	1 to 52, 54 to 65535
IPaddress_AS	10.0.0.1/32	TCP	443

Rule Number	Access Policy Name	Application Segment	User Group	Action
1	Allow User A to access IPaddress_AS	IPaddress_AS	User A	Allow
2	Allow Everyone to access Subnet_AS	Subnet_AS	All	Allow

In this scenario, the host at IP address 10.0.0.1 is contained within the IPaddress_AS application segment. If user B tries to access 10.0.0.1 on TCP port 443, they match the implicit block rule. User B does not match with rule number 1 because it is restricted to only User A. User B also does not match with rule number 2 even though it is for everyone, because the moment the IP address is created, the 10.0.0.1/32 host is carved out of Subnet_AS 10.0.0.0/24.

Example: IP-Based Multimatch

The primary use for Multimatch is when there are multiple possible application segment matches. The following tables show application segment configuration, the policy configuration, and how they match up.

Application Segment Configuration				
Application Segment Name	**Application**	**Protocol**	**Port**	**Multimatch**
Subnet_AS	10.0.0.0/24	TCP, UDP	1 to 52, 54 to 65535	Enabled

©2026 Zscaler, Inc. All rights reserved.

Application Segment Configuration

Application Segment Name	Application	Protocol	Port	Multimatch
IPAddress_AS	10.0.0.1/32	TCP	443, 3389	Enabled

Application Match and Policy Search Results

#	Access Policy Name	Application Segment Name	Policy Action	User Group
1	Allow IPAddress_AS for Admin	IPAddress_AS	Allow	Admin_Grp
2	Allow Subnet_AS for All	Subnet_AS	Allow	All

Application Match and Policy Search Results

User	Group	IP Address: Protocol & Port	Matched Application Segment with Multimatch	Matched Application Segment without Multimatch	Matched Policy with Multimatch	Matched Policy without Multimatch
user1	Admin_Grp	10.0.0.1:TCP+3389	Subnet_AS IPAddress_AS	IPAddress_AS	Allow IPAddress_AS for Admin (#1)	Allow IPAddress_AS for Admin (#1)
user2	IT_Grp	10.0.0.1:TCP+3389	Subnet_AS IPAddress_AS	IPAddress_AS	Allow Subnet_AS for All (#2)	No policy match. Blocked by implicit default block policy.

©2026 Zscaler, Inc. All rights reserved.

Application Match and Policy Search Results

User	Group	IP Address: Protocol & Port	Matched Application Segment with Multimatch	Matched Application Segment without Multimatch	Matched Policy with Multimatch	Matched Policy without Multimatch
user1	Admin_Grp	10.0.0.1:TCP+22	Subnet_AS	N/A	Allow Subnet_AS for All (#2)	Traffic is dropped at the client level
user2	IT_Grp	10.0.0.1:TCP+22	Subnet_AS	N/A	Allow Subnet_AS for All (#2)	Traffic is dropped at the client level
user3	IT_Grp	10.0.0.1:TCP+80	Subnet_AS	N/A	Allow Subnet_AS for All (#2)	Traffic is dropped at the client level
user3	IT_Grp	10.0.0.1:TCP+443	Subnet_AS IPAddress_AS	IPAddress_AS	Allow Subnet_AS for All (#2)	No policy match. Blocked by implicit default block policy.

Traffic that is dropped at the client level means that traffic matches the IP address, but it does not match the protocol and port. In this condition, traffic is not sent to the cloud for further processing. This means that policy evaluation does not occur, and the user is not able to access the application segment. In this case, traffic is not visible in the Private Access diagnostics.

©2026 Zscaler, Inc. All rights reserved.