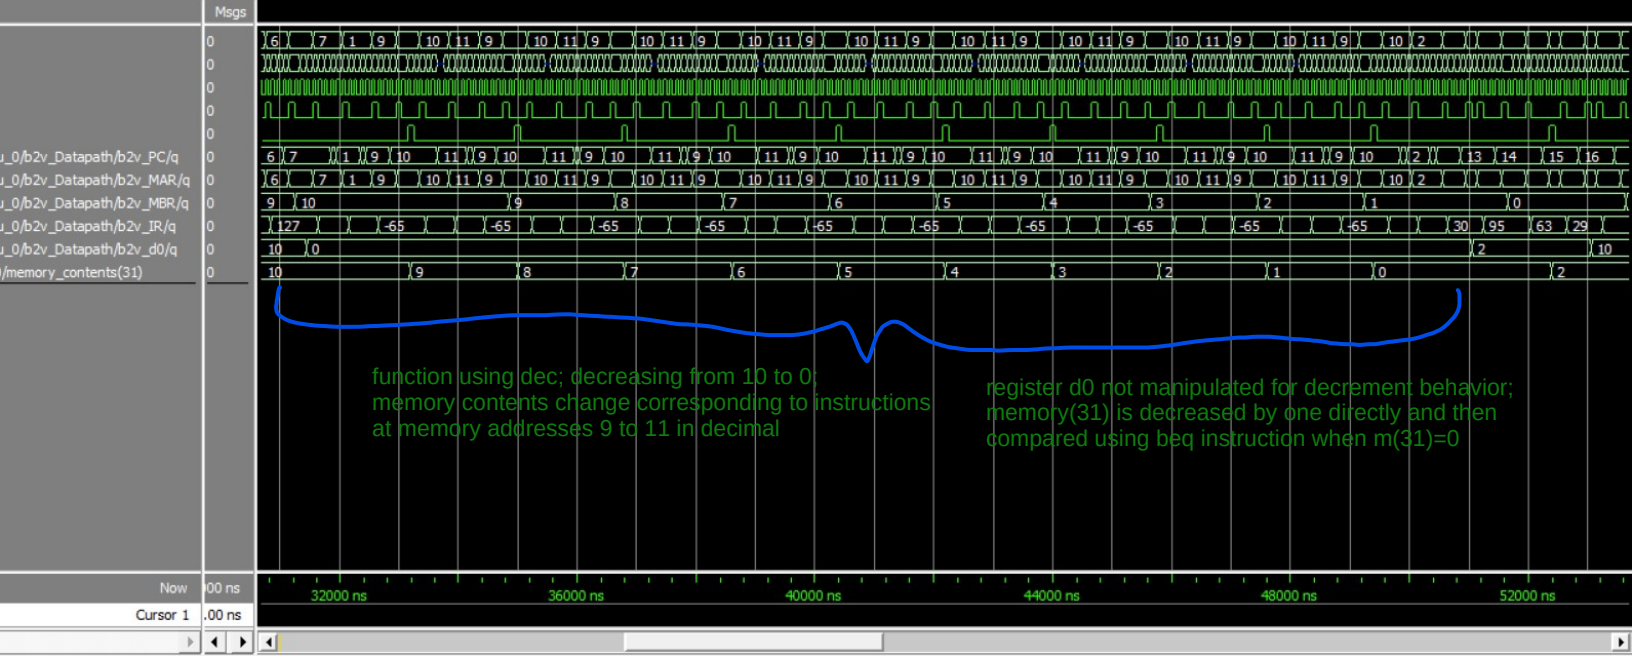

Msgs
u_0/b2v_Datapath/b2v_PC/q
u_0/b2v_Datapath/b2v_MAR/q
u_0/b2v_Datapath/b2v_MBR/q
u_0/b2v_Datapath/b2v_IR/q
u_0/b2v_Datapath/b2v_d0/q
/memory_contents(31)
Now
Cursor 1
32000 ns
36000 ns
40000 ns
44000 ns
48000 ns
52000 ns
function using dec; decreasing from 10 to 0;
memory contents change corresponding to instructions
at memory addresses 9 to 11 in decimal
register d0 not manipulated for decrement behavior;
memory(31) is decreased by one directly and then
compared using beq instruction when m(31)=0