(a) obstruction

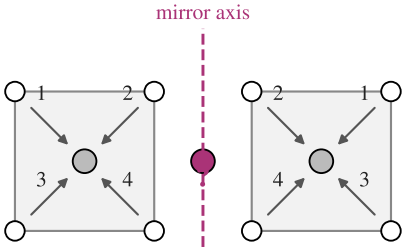

surface code: 4! orders per check;
an axis ancilla would need order = its own mirror

(b) exactness

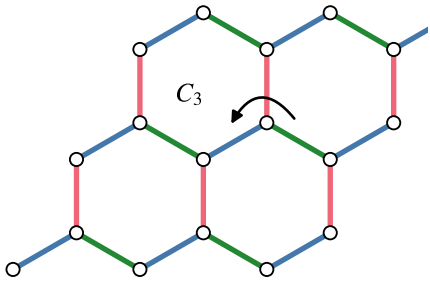

honeycomb: every check is weight-2 —
one schedule bit per edge, automatically covariant