URDANETA CITY UNIVERSITY

College of Information and Technology Education

MIDTERM LABORATORY 2

Converting a Portfolio Section into a Dynamic CRUD Feature

Laravel, Inertia.js, React, and SQLite

Name: Dwayne Arjon T. Santiago

Course: IT ELEC01 – Advanced Web Development (C287-C288)

Section: BSIT 3-[FILL IN YOUR SECTION]

Instructor: Giobet T. Aban

Date: November 3, 2026

DOCUMENTATION

1. Section Chosen and Justification

Which section did you choose, and why?

I chose the Projects section because the projects in my portfolio change as I complete new designs, websites, and video work. Each record has several related details, such as a title, category, difficulty, summary, technologies, links, date, and image.

Keeping the project records in a database is more practical than hard-coding every card in React. I can manage records from the admin pages, and the public portfolio reads the same records from the database, so a saved change appears on the public page without editing the card markup.

Project fields

The projects table has twelve meaningful fields, excluding the id and timestamps.

Field	Data type / rule	Purpose
title	string, 3-120 characters	Required project name show n as the card heading.
slug	string, unique, max 100	URL-friendly project identifier; low ercase letters, numbers, and hyphens only.
category	string enum	Groups the project into one of the categories used by the portfolio filter.
difficulty	string enum	Required level: Easy, Medium, or Hard; existing row s default to Medium.
excerpt	string, max 180	Short project summary displayed below the title.
description	text, min 30	Longer explanation of the project.
tech_stack	string, nullable in DB	Comma-separated tools; required by the form validation and limited to 255 characters.
completed_date	date, nullable	Optional completion date show n on the public card.
project_url	string, nullable	Optional live project/Figma link or a page anchor such as #home.
github_url	string, nullable	Optional HTTP or HTTPS repository link.
image_url	string, nullable	Optional HTTP(S) image URL or a file path under /images.
featured	boolean, default false	Marks a project as featured and affects list ordering.

Main validation rules

Title is required, must be a string, and must be 3–120 characters.

Slug is required, unique, at most 100 characters, and follows a lowercase letters/numbers/hyphens format.

Category is required and restricted to the available project categories.

Difficulty is required and restricted to Easy, Medium, or Hard.

Excerpt is required and limited to 180 characters; description is required and at least 30 characters.

Tech stack is required and limited to 255 characters.

Completion date is optional but must be a valid date when supplied.

Project URL is optional and must be HTTP(S) or a page anchor; GitHub URL must be a valid HTTP(S) URL.

Image URL is optional and must be HTTP(S) or a file path under /images.

Featured is treated as a boolean.

2. Screenshots of All Pages

Figures A-G show the running app. Figure E reconstructs the captured browser prompt; the folder tree is generated from current project files.

Figure A. Public Projects section

Dynamic portfolio cards and filters.


PROJECTS

Selected web and creative work. Projects are managed through the Laravel admin dashboard.

All | Web Development | Creative

JOHN LEE AGUSTIN

UI/UX



johnlee on top


Laravel

emman is the best nyehehhehehehehe

Completed: Nov 1, 2026 Difficulty:Hard

SHEEESH

UI/UX




wadadadasadaw

Tailwind

adwoadhjasndoeauhaldnsowahdasdwa

Completed: Nov 1, 2026 Difficulty:Medium

OVERSMOKE ADMIN DASHBOARD



WEB DEVELOPMENT


An admin dashboard design for an online store, showing product and stock totals, low stock alerts, top selling products and a sales report.

Figma UI Design Laravel

Completed: Aug 5, 2026 Difficulty:Medium

View Project | Repository

OVERSMOKE STORE UI DESIGN



CREATIVE


A Figma homepage design for an online shop, with a category and brand filter sidebar, a featured banner, a sortable product grid and an add-to-cart flow.

Figma UI Design Wireframing

Completed: Jul 14, 2026 Difficulty:Medium

View Project | Repository

PERSONAL PORTFOLIO WEBSITE



WEB DEVELOPMENT

A responsive portfolio that showcases my technical skills, projects, education and creative work.

HTML Tailwind CSS JavaScript

Completed: Sep 2, 2026 Difficulty:Medium

View Project | Repository

VIDEO EDITING ON YOUTUBE



CREATIVE

My YouTube channel, where my video work lives. I share edited content and visual storytelling projects.

CapCut

Completed: Jun 30, 2026 Difficulty:Medium

View Project | Repository

YOUTUBE

Figure B. Admin project list

Database records with Edit and Delete actions.

PORTFOLIO CONTROL ROOM

PROJECT MANAGER

Manage the work shown on your public portfolio.

Add project

↗ View public portfolio

01 / LIBRARY

PROJECT LIST

06 ITEMS

JOHN LEE AGUSTIN

HARD • FEATURED

Edit Delete

SHEEESH

MEDIUM • STANDARD

Edit Delete

OVERSMOKE ADMIN DASHBOARD

MEDIUM • STANDARD

Edit Delete

OVERSMOKE STORE UI DESIGN

MEDIUM • STANDARD

Edit Delete

PERSONAL PORTFOLIO WEBSITE

MEDIUM • STANDARD

Edit Delete

VIDEO EDITING ON YOUTUBE

MEDIUM • STANDARD

Edit Delete

Figure C. Create page

Blank create form, including Difficulty selection.

PORTFOLIO CONTROL ROOM

CREATE PROJECT

Add a project to your public portfolio.

Back to projects

↗ View public portfolio

01 / CONTENT

PROJECT DETAILS

Project title

Northwind Analytics

Slug

northwind-analytics

Category

Web Development

Difficulty

Select difficulty

Tech stack

Laravel, React, Tailwind

Completion date

mm/dd/yyyy

Excerpt

A SaaS dashboard for modern operations teams.

Detailed description

Describe your solution, challenges, and impact...

Project URL

https://example.com

GitHub URL

https://github.com/username/project

Image URL

https://images.unsplash.com/...

Mark as featured project

Create project

Figure D. Edit page

Existing project loaded into the shared form.

PORTFOLIO CONTROL ROOM

EDIT PROJECT

Update the details shown on your public portfolio.

Back to projects

↗ View public portfolio

01 / CONTENT

OVERSMOKE ADMIN DASHBOARD

Project title

Oversmoke Admin Dashboard

Slug

oversmoke-dashboard

Category

Web Development

Difficulty

Medium

Tech stack

Figma, UI Design, Laravel

Completion date

08/05/2026

Excerpt

An admin dashboard design for an online store, showing product and stock totals, low stock aler

Detailed description

An admin dashboard design for an online store, showing product and stock totals, low stock alerts, top selling products and a sales report.

Project URL

https://www.figma.com/design/mulBtk8NovF

GitHub URL

https://github.com/

Image URL

/images/oversmoke-dashboard.png

☐ Mark as featured project

Cancel

Update project

Figure E. Delete confirmation

Recreated view of the exact native prompt captured during testing; deletion was cancelled.

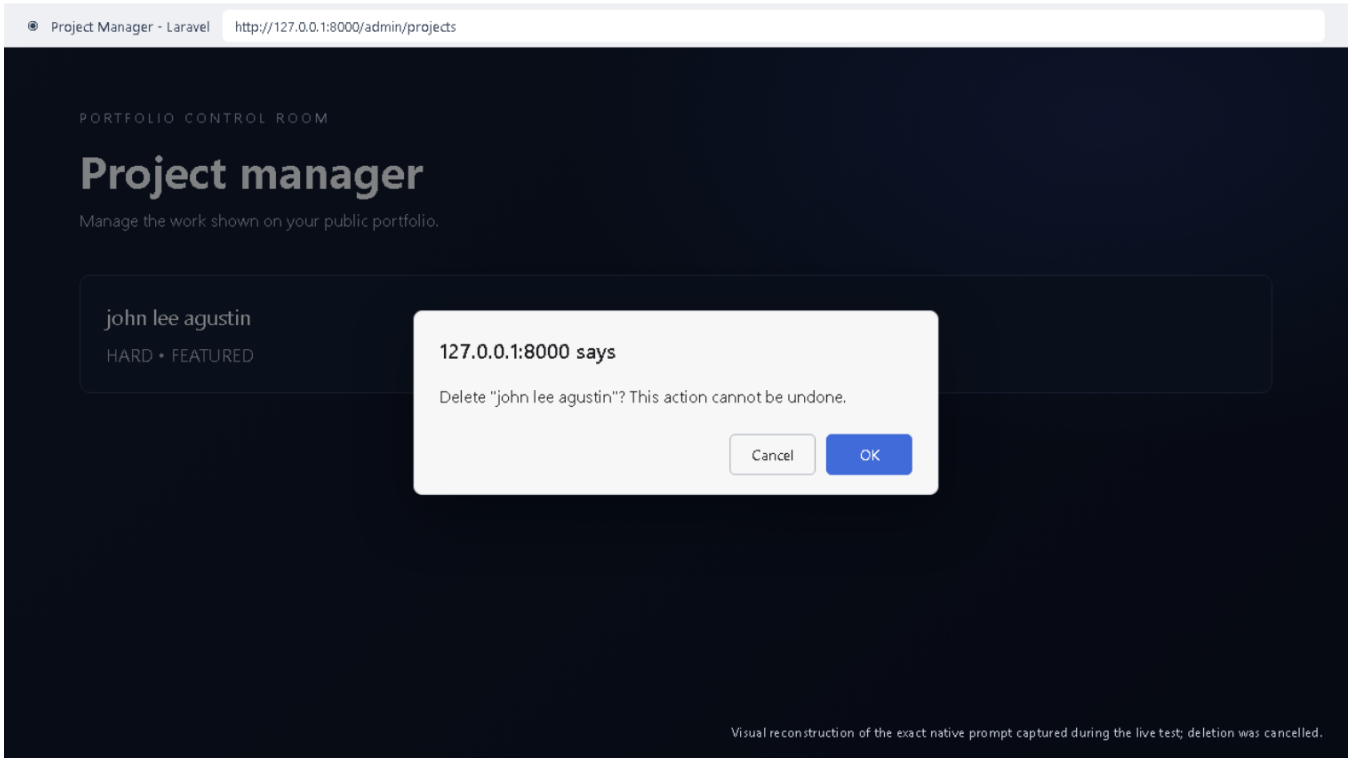


Figure F. Success feedback

Success message and newly created record in the list.

PORTFOLIO CONTROL ROOM

PROJECT MANAGER

Manage the work shown on your public portfolio.

Add project

↗ View public portfolio

Project created successfully.

01 / LIBRARY

PROJECT LIST

07 ITEMS

JOHN LEE AGUSTIN

HARD • FEATURED

Edit Delete

DOCUMENTATION DEMO RECORD

EASY • STANDARD

Edit Delete

SHEEESH

MEDIUM • STANDARD

Edit Delete

OVERSMOKE ADMIN DASHBOARD

MEDIUM • STANDARD

Edit Delete

OVERSMOKE STORE UI DESIGN

MEDIUM • STANDARD

Edit Delete

PERSONAL PORTFOLIO WEBSITE

MEDIUM • STANDARD

Edit Delete

VIDEO EDITING ON YOUTUBE

MEDIUM • STANDARD

Edit Delete

Figure G. Validation errors

Field-level errors after submitting an empty form.

PORTFOLIO CONTROL ROOM

CREATE PROJECT

Add a project to your public portfolio.

Back to projects

↗ View public portfolio

01 / CONTENT

PROJECT DETAILS

Project title

Northwind Analytics

The title field is required.

Slug

northwind-analytics

The slug field is required.

Category

Web Development

Difficulty

Select difficulty

The difficulty field is required.

Tech stack

Laravel, React, Tailwind

The tech stack field is required.

Completion date

mm/dd/yyyy

Excerpt

A SaaS dashboard for modern operations teams.

The excerpt field is required.

Detailed description

Describe your solution, challenges, and impact...

The description field is required.

Project URL

https://example.com

GitHub URL

https://github.com/username/project

Image URL

https://images.unsplash.com/...

Mark as featured project

Create project


3. Folder Structure

The project files related to the dynamic Projects section are organized as follows:

```
laravel-app/
├── app/
│   ├── Http/
│   │   ├── Controllers/
│   │   │   ├── PortfolioController.php
│   │   │   └── ProjectController.php
│   │   └── Requests/
│   │       ├── StoreProjectRequest.php
│   │       └── UpdateProjectRequest.php
│   └── Models/Project.php
├── database/migrations/
│   ├── 2026_11_02_070137_create_projects_table.php
│   ├── 2026_11_02_073632_add_completed_date_to_projects_table.php
│   └── 2026_11_03_114706_add_difficulty_to_projects_table.php
├── resources/js/
│   ├── Components/ProjectForm.jsx
│   └── Pages/
│       ├── Admin/Projects/{Index,Create,Edit}.jsx
│       └── Portfolio/Index.jsx
├── routes/web.php
└── tests/Feature/ProjectValidationTest.php
```

The current admin pages are separate Index, Create, and Edit files. The public project-card markup is rendered in Portfolio/Index.jsx; there is no separate ProjectCard component in the current source.

Project folder structure (generated from the current files)

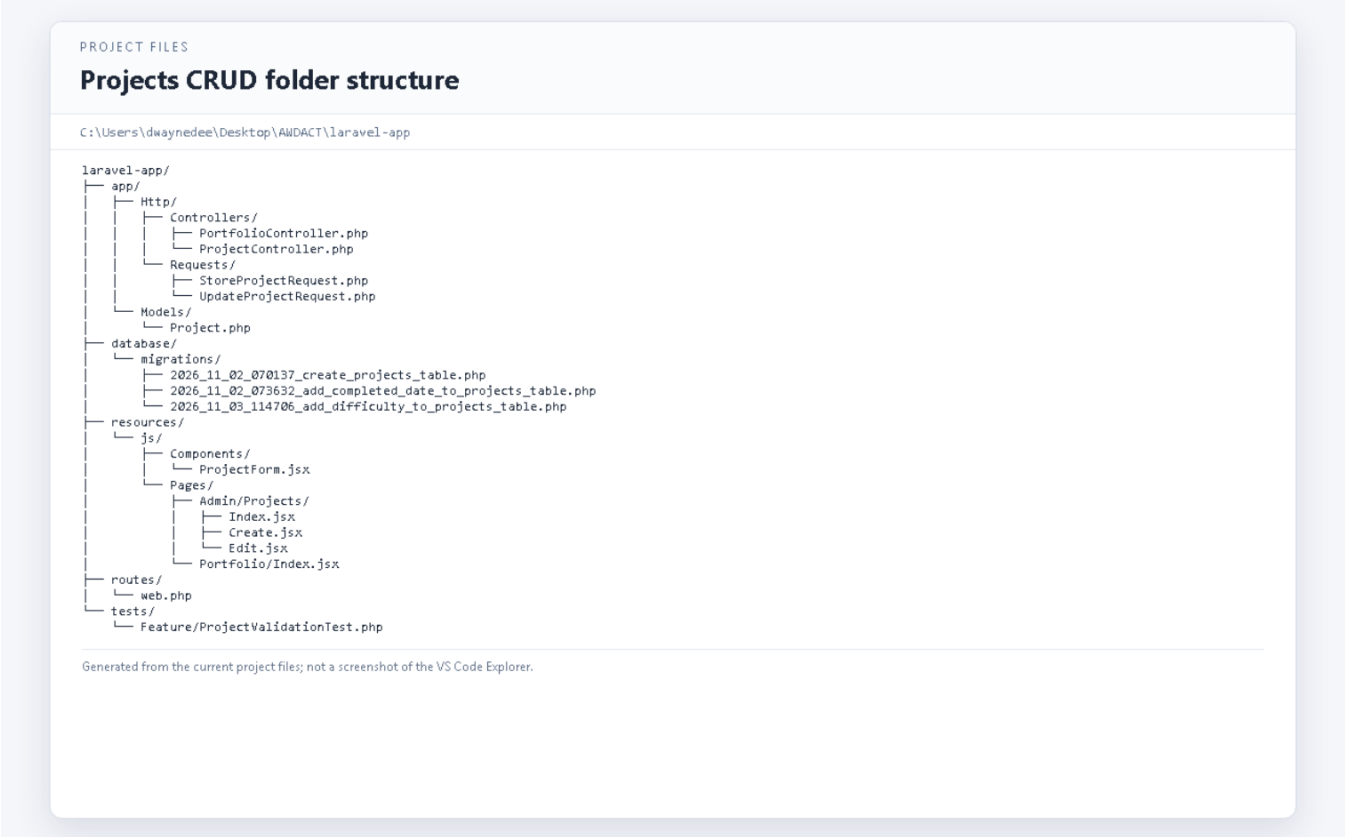

4. Source Code

Complete source listings from the current project are included below. Each file has a short explanation of its role.

Database migration: create projects table — database/migrations/2026_11_02_070137_create_projects_table.php

Creates the project table, unique slug, content fields, featured flag, and timestamps.

```
<?php

use Illuminate\Database\Migrations\Migration;
use Illuminate\Database\Schema\Blueprint;
use Illuminate\Support\Facades\Schema;

return new class extends Migration
{
    /**
     * Run the migrations.
     */
    public function up(): void
    {
        Schema::create('projects', function (Blueprint $table) {
            $table->id();
            $table->string('title');
            $table->string('slug')->unique();
            $table->string('category');
            $table->string('excerpt', 180);
            $table->text('description');
            $table->string('tech_stack')->nullable();
            $table->string('project_url')->nullable();
            $table->string('github_url')->nullable();
            $table->string('image_url')->nullable();
            $table->boolean('featured')->default(false);
            $table->timestamps();
        });
    }

    /**
     * Reverse the migrations.
     */
    public function down(): void
    {
        Schema::dropIfExists('projects');
    }
};
```

Database migration: completed date — database/migrations/2026_11_02_073632_add_completed_date_to_projects_table.php

Adds an optional completion date without rewriting the original migration.

```
<?php

use Illuminate\Database\Migrations\Migration;
use Illuminate\Database\Schema\Blueprint;
use Illuminate\Support\Facades\Schema;

return new class extends Migration
{
    /**
     * Run the migrations.
     */
    public function up(): void
    {
        Schema::table('projects', function (Blueprint $table): void {
            $table->date('completed_date')->nullable()->after('image_url');
        });
    }

    /**
     * Reverse the migrations.
     */
    public function down(): void
    {
        Schema::table('projects', function (Blueprint $table): void {
            $table->dropColumn('completed_date');
        });
    }
};
```

Database migration: difficulty — database/migrations/2026_11_03_114706_add_difficulty_to_projects_table.php

Adds Difficulty with a Medium default and removes it when rolled back.

```
<?php

use Illuminate\Database\Migrations\Migration;
use Illuminate\Database\Schema\Blueprint;
use Illuminate\Support\Facades\Schema;

return new class extends Migration
{
    /**
     * Run the migrations.
     */
    public function up(): void
    {
        Schema::table('projects', function (Blueprint $table) {
            $table->string('difficulty')->default('Medium');
        });
    }

    /**
     * Reverse the migrations.
     */
    public function down(): void
    {
        Schema::table('projects', function (Blueprint $table) {
            $table->dropColumn('difficulty');
        });
    }
};
```

Project model — app/Models/Project.php

Defines mass-assignable attributes and casts the featured flag and completion date.

```
<?php

namespace App\Models;

use Illuminate\Database\Eloquent\Model;

class Project extends Model
{
    protected $fillable = [
        'title',
        'slug',
        'category',
        'difficulty',
        'excerpt',
        'description',
        'tech_stack',
        'project_url',
        'github_url',
        'image_url',
        'completed_date',
        'featured',
    ];

    protected $casts = [
        'featured' => 'boolean',
        'completed_date' => 'date:Y-m-d',
    ];
}
```

Project controller — app/Http/Controllers/ProjectController.php

Implements the list, create, store, edit, update, and delete actions.

```
<?php

namespace App\Http\Controllers;

use App\Http\Requests\StoreProjectRequest;
use App\Http\Requests\UpdateProjectRequest;
use App\Models\Project;
use Illuminate\Http\RedirectResponse;
use Inertia\Inertia;
use Inertia\Response;

class ProjectController extends Controller
{
    public function index(): Response
    {
        return Inertia::render('Admin/Projects/Index', [
            'projects' => Project::orderByDesc('featured')->latest()->get(),
            'success' => session('success'),
        ]);
    }

    public function create(): Response
    {
        return Inertia::render('Admin/Projects/Create');
    }

    public function store(StoreProjectRequest $request): RedirectResponse
    {
        Project::create($request->validated());

        return redirect()->route('admin.projects.index')->with('success', 'Project created successfully.');
    }

    public function edit(Project $project): Response
    {
        return Inertia::render('Admin/Projects/Edit', [
            'project' => $project,
        ]);
    }

    public function update(UpdateProjectRequest $request, Project $project): RedirectResponse
    {
        $project->update($request->validated());

        return redirect()->route('admin.projects.index')->with('success', 'Project updated successfully.');
    }

    public function destroy(Project $project): RedirectResponse
    {
        $project->delete();

        return redirect()->route('admin.projects.index')->with('success', 'Project deleted successfully.');
    }
}
```

Portfolio controller — app/Http/Controllers/PortfolioController.php

Loads project records and passes them to the public Inertia page.

```
<?php

namespace App\Http\Controllers;

use App\Models\Project;
use Inertia\Inertia;
use Inertia\Response;

class PortfolioController extends Controller
{
    public function index(): Response
    {
        return Inertia::render('Portfolio/Index', [
            'projects' => Project::orderByDesc('featured')->latest()->get(),
        ]);
    }
}
```

Store validation request — app/Http/Requests/StoreProjectRequest.php

Validates new project data and defines custom URL/slug messages.

```
<?php

namespace App\Http\Requests;

use Illuminate\Foundation\Http\FormRequest;

class StoreProjectRequest extends FormRequest
{
    public function authorize(): bool
    {
        return true;
    }

    public function rules(): array
    {
        return [
            'title' => ['required', 'string', 'min:3', 'max:120'],
            'slug' => ['required', 'string', 'regex:/^[a-z0-9]+(?:-[a-z0-9]+)*$/', 'max:100', 'unique:projects,slug'],
            'category' => ['required', 'string', 'in:Web Development,Creative,Web App,UI/UX,Branding,Mobile,Data'],
            'difficulty' => ['required', 'string', 'in:Easy,Medium,Hard'],
            'excerpt' => ['required', 'string', 'max:180'],
            'description' => ['required', 'string', 'min:30'],
            'tech_stack' => ['required', 'string', 'max:255'],
            'completed_date' => ['nullable', 'date'],
            'project_url' => ['nullable', 'string', 'max:2048', 'regex:/^(https?:\/\/\S+|#[a-zA-Z0-9_-]+)$/'],
            'github_url' => ['nullable', 'url:http,https'],
            'image_url' => ['nullable', 'string', 'max:2048', 'regex:/^(https?:\/\/\S+|\/images\/[A-Za-z0-9._-]+)$/'],
            'featured' => ['boolean'],
        ];
    }

    public function messages(): array
    {
        return [
            'slug.regex' => 'The slug may only contain lowercase letters, numbers, and hyphens.',
            'project_url.regex' => 'The public project link must be a valid URL or a page anchor.',
            'github_url.url' => 'The GitHub link must be a valid URL.',
            'image_url.regex' => 'Use an http(s) URL or an image stored in /images.',
        ];
    }
}
```

Update validation request — app/Http/Requests/UpdateProjectRequest.php

Applies update rules and ignores the current row in the unique slug check.

```
<?php

namespace App\Http\Requests;

use Illuminate\Foundation\Http\FormRequest;

class UpdateProjectRequest extends FormRequest
{
    public function authorize(): bool
    {
        return true;
    }

    public function rules(): array
    {
        $projectId = $this->route('project')?->id ?? $this->route('project');

        return [
            'title' => ['required', 'string', 'min:3', 'max:120'],
            'slug' => ['required', 'string', 'regex:/^[a-z0-9]+(?:-[a-z0-9]+)*$/', 'max:100', 'unique:projects,slug,' .
$projectId],
            'category' => ['required', 'string', 'in:Web Development,Creative,Web App,UI/UX,Branding,Mobile,Data'],
            'difficulty' => ['required', 'string', 'in:Easy,Medium,Hard'],
            'excerpt' => ['required', 'string', 'max:180'],
            'description' => ['required', 'string', 'min:30'],
            'tech_stack' => ['required', 'string', 'max:255'],
            'completed_date' => ['nullable', 'date'],
            'project_url' => ['nullable', 'string', 'max:2048', 'regex:/^(https?:\/\/\S+|#[a-zA-Z0-9_-]+)$/'],
            'github_url' => ['nullable', 'url:http,https'],
            'image_url' => ['nullable', 'string', 'max:2048', 'regex:/^(https?:\/\/\S+|\/images\/[A-Za-z0-9._-]+)$/'],
            'featured' => ['boolean'],
        ];
    }

    public function messages(): array
    {
        return [
            'slug.regex' => 'The slug may only contain lowercase letters, numbers, and hyphens.',
            'project_url.regex' => 'The public project link must be a valid URL or a page anchor.',
            'github_url.url' => 'The GitHub link must be a valid URL.',
            'image_url.regex' => 'Use an http(s) URL or an image stored in /images.',
        ];
    }
}
```

Web routes — routes/web.php

Maps public portfolio and explicit admin CRUD URLs to their controllers.

```
<?php

use App\Http\Controllers\PortfolioController;
use App\Http\Controllers\ProjectController;
use Illuminate\Support\Facades\Route;

Route::get('/', [PortfolioController::class, 'index'])->name('portfolio');

Route::prefix('admin')->name('admin.')->group(function () {
    Route::get('/projects', [ProjectController::class, 'index'])->name('projects.index');
    Route::get('/projects/create', [ProjectController::class, 'create'])->name('projects.create');
    Route::post('/projects', [ProjectController::class, 'store'])->name('projects.store');
    Route::get('/projects/{project}/edit', [ProjectController::class, 'edit'])->name('projects.edit');
    Route::put('/projects/{project}', [ProjectController::class, 'update'])->name('projects.update');
    Route::delete('/projects/{project}', [ProjectController::class, 'destroy'])->name('projects.destroy');
});

Route::get('/admin', function () {
    return redirect()->route('admin.projects.index');
});
```

Admin project list — resources/js/Pages/Admin/Projects/Index.jsx

Displays project records, success feedback, edit links, and delete confirmation.

```
import { Head, Link, router } from '@inertiajs/react';

export default function Index({ projects = [], success = null }) {
    const handleDelete = (project) => {
        const confirmed = window.confirm(`Delete "${project.title}"? This action cannot be undone.`);

        if (confirmed) {
            router.delete(`/admin/projects/${project.id}`);
        }
    };

    return (
        <>
            <Head title="Project Manager" />

            <div className="admin-page">
                <div className="admin-ambient" aria-hidden="true" />
                <div className="admin-shell">
                    <header className="admin-header">
                        <div className="admin-intro">
                            <span className="admin-eyebrow"><span aria-hidden="true" />PORTFOLIO CONTROL ROOM</span>
                            <h1>Project manager</h1>
                            <p>Manage the work shown on your public portfolio.</p>
                        </div>
                        <div className="admin-actions">
                            <Link href="/admin/projects/create" className="button-primary">Add project</Link>
                            <Link href="/" className="button-secondary admin-portfolio-link">
                                <span aria-hidden="true">↗</span> View public portfolio
                            </Link>
                        </div>
                    </header>

                    {success ? <div className="flash-success" role="status">{success}</div> : null}

                    <section className="glass-panel admin-panel admin-panel--list">
                        <div className="list-header admin-panel-heading">
                            <div>
                                <span className="admin-panel-index">01 / LIBRARY</span>
                                <h2>Project list</h2>
                            </div>
                            <span className="admin-count"><strong>{String(projects.length).padStart(2, '0')}</strong>
ITEMS</span>
                        </div>

                        <div className="project-list">
                            {projects.length > 0 ? (
                                projects.map((project, index) => (
                                    <div key={project.id} className="admin-project-item" style={{ '--item-index': index }}>
                                        <div>
                                            <strong>{project.title}</strong>
                                            <small>
                                                {project.difficulty} • {project.featured ? 'Featured' : 'Standard'}
                                            </small>
                                        </div>

                                        <div className="admin-actions">
                                            <Link href={`/admin/projects/${project.id}/edit`} className="button-secondary">
                                                Edit
                                            </Link>
                                            <button type="button" className="delete-button" onClick={() =>
handleDelete(project)}>

                                                Delete
                                            </button>
                                        </div>
                                    </div>
                                ))
                            ) : (
                                <div className="empty-state">No projects created yet. Add one to get started.</div>
                            )}
                        </div>
                    </section>
                </div>
            </div>
        </>
```

```
    );
}
```

Create page — resources/js/Pages/Admin/Projects/Create.jsx

Renders the shared form for a new project.

```
import { Head, Link } from '@inertiajs/react';
import ProjectForm from '../../../Components/ProjectForm';

export default function Create({ errors = {} }) {
    return (
        <>
            <Head title="Create project" />

            <div className="admin-page">
                <div className="admin-ambient" aria-hidden="true" />
                <div className="admin-shell">
                    <header className="admin-header">
                        <div className="admin-intro">
                            <span className="admin-eyebrow"><span aria-hidden="true" />PORTFOLIO CONTROL ROOM</span>
                            <h1>Create project</h1>
                            <p>Add a project to your public portfolio.</p>
                        </div>
                        <div className="admin-actions">
                            <Link href="/admin/projects" className="button-secondary">Back to projects</Link>
                            <Link href="/" className="button-secondary admin-portfolio-link">
                                <span aria-hidden="true">↗</span> View public portfolio
                            </Link>
                        </div>
                    </header>

                    <section className="glass-panel admin-panel admin-panel--form">
                        <div className="list-header admin-panel-heading">
                            <span className="admin-panel-index">01 / CONTENT</span>
                            <h2>Project details</h2>
                        </div>
                        <ProjectForm errors={errors} />
                    </section>
                </div>
            </div>
        </>
    );
}
```

Edit page — resources/js/Pages/Admin/Projects/Edit.jsx

Renders the shared form prefilled with an existing project.

```
import { Head, Link } from '@inertiajs/react';
import ProjectForm from '../../../Components/ProjectForm';

export default function Edit({ project, errors = {} }) {
    return (
        <>
            <Head title={`Edit ${project.title}`} />

            <div className="admin-page">
                <div className="admin-ambient" aria-hidden="true" />
                <div className="admin-shell">
                    <header className="admin-header">
                        <div className="admin-intro">
                            <span className="admin-eyebrow"><span aria-hidden="true" />PORTFOLIO CONTROL ROOM</span>
                            <h1>Edit project</h1>
                            <p>Update the details shown on your public portfolio.</p>
                        </div>
                        <div className="admin-actions">
                            <Link href="/admin/projects" className="button-secondary">Back to projects</Link>
                            <Link href="/" className="button-secondary admin-portfolio-link">
                                <span aria-hidden="true">↗</span> View public portfolio
                            </Link>
                        </div>
                    </header>

                    <section className="glass-panel admin-panel admin-panel--form">
                        <div className="list-header admin-panel-heading">
                            <span className="admin-panel-index">01 / CONTENT</span>
                            <h2>{project.title}</h2>
                        </div>
                        <ProjectForm project={project} errors={errors} />
                    </section>
                </div>
            </div>
        </>
    );
}
```

Public portfolio page — resources/js/Pages/Portfolio/Index.jsx

Renders database-backed project cards and category filters.

```
import { Head, Link } from '@inertiajs/react';
import { useEffect, useMemo, useRef, useState } from 'react';

const navigation = [
    ['about', 'About'],
    ['services', 'Services'],
    ['skills', 'Skills'],
    ['journey', 'Journey'],
    ['projects', 'Projects'],
    ['youtube-performance', 'YouTube Analytics'],
    ['education', 'Education'],
    ['contact', 'Contact'],
];

const journeyStages = [
    ['Student', "I'm a BSIT student at Urdaneta City University, building a base in programming, networks and systems."],
    ['Learning', 'I study backend concepts, web fundamentals and security topics like HTTPS/TLS, and practice them in class.'],
    ['Building Projects', 'I turn what I learn into working projects, such as a staff dashboard concept and this portfolio.'],
    ['Developing Technical Skills', 'With every project I go deeper into JavaScript, backend development and responsive
design.'],
    ['Future IT Professional', 'My goal is to join an IT team as a developer who can build reliable systems and explain them
clearly.'],
];

const portraitImages = {
    center: '/images/profile.jpg',
    left: '/images/portrait-left.jpg',
    right: '/images/portrait-right.jpg',
    up: '/images/portrait-up.jpg',
    down: '/images/portrait-down.jpg',
};

const titleClass =
    'bg-gradient-to-b from-ink to-mute bg-clip-text font-display text-[15vw] font-black uppercase leading-none text-transparent
sm:text-8xl xl:text-9xl';
const fieldClass =
    'w-full rounded-sm border-2 border-mute bg-bg px-4 py-3 text-ink transition focus:border-brand focus:shadow-
[0_0_3px_rgb(96_150_255/0.35)]';
const buttonClass =
    'rounded-sm border-2 border-line px-4 py-2 text-sm font-medium transition hover:-translate-y-0.5 hover:shadow-
[0_0_16px_rgb(96_150_255/0.5)]';

export default function Index({ projects = [] }) {
    const [theme, setTheme] = useState('midnight');
    const [motionEnabled, setMotionEnabled] = useState(true);
    const [mobileOpen, setMobileOpen] = useState(false);
    const [activeSection, setActiveSection] = useState('');
    const [activeStage, setActiveStage] = useState(null);
    const [portraitDirection, setPortraitDirection] = useState('center');
    const [filter, setFilter] = useState('all');
    const [progress, setProgress] = useState(0);
    const [statsVisible, setStatsVisible] = useState(false);
    const [displayCounts, setDisplayCounts] = useState([0, 0, 0, 0]);
    const [cursorHover, setCursorHover] = useState(false);
    const [contact, setContact] = useState({ name: '', email: '', message: '' });
    const [contactErrors, setContactErrors] = useState({});
    const [contactSuccess, setContactSuccess] = useState('');
    const cursorRef = useRef(null);
    const portraitFrameRef = useRef(null);
    const cursorPosition = useRef({ x: 0, y: 0, targetX: 0, targetY: 0 });

    const visibleProjects = useMemo(
        () =>
            projects.filter((project) => {
                if (filter === 'all') return true;
                if (filter === 'web') return project.category === 'Web Development';
                return project.category === 'Creative';
            }),
        [filter, projects],
    );

    useEffect(() => {
        try {
            setTheme(localStorage.getItem('theme') || 'midnight');
            setMotionEnabled(
```

```
            localStorage.getItem('motion')
                ? localStorage.getItem('motion') !== 'off'
                : !window.matchMedia('(prefers-reduced-motion: reduce)').matches,
        );
    } catch {
        setMotionEnabled(!window.matchMedia('(prefers-reduced-motion: reduce)').matches);
    }
}, []);

useEffect(() => {
    document.documentElement.classList.toggle('theme-charcoal', theme === 'charcoal');
    document.documentElement.classList.toggle('reduce-motion', !motionEnabled);
}, [motionEnabled, theme]);

useEffect(() => {
    const updateProgress = () => {
        const maxScroll = document.documentElement.scrollHeight - window.innerHeight;
        setProgress(maxScroll > 0 ? Math.min(window.scrollY / maxScroll, 1) : 0);
    };
    updateProgress();
    window.addEventListener('scroll', updateProgress, { passive: true });
    window.addEventListener('resize', updateProgress);
    return () => {
        window.removeEventListener('scroll', updateProgress);
        window.removeEventListener('resize', updateProgress);
    };
}, []);

useEffect(() => {
    const sections = document.querySelectorAll('main section[id]');
    if (!('IntersectionObserver' in window)) return undefined;
    const observer = new IntersectionObserver(
        (entries) => {
            entries.forEach((entry) => {
                if (entry.isIntersecting) setActiveSection(entry.target.id);
            });
        },
        { rootMargin: '-40% 0px -55% 0px' },
    );
    sections.forEach((section) => observer.observe(section));
    return () => observer.disconnect();
}, []);

useEffect(() => {
    if (!motionEnabled || !('IntersectionObserver' in window)) {
        document.querySelectorAll('.reveal').forEach((element) => element.classList.add('is-visible'));
        return undefined;
    }
    const observer = new IntersectionObserver(
        (entries) => {
            entries.forEach((entry) => {
                if (!entry.isIntersecting) return;
                entry.target.classList.add('is-visible');
                observer.unobserve(entry.target);
            });
        },
        { threshold: 0.15 },
    );
    document.querySelectorAll('.reveal').forEach((element) => observer.observe(element));
    return () => observer.disconnect();
}, [motionEnabled, projects.length]);

useEffect(() => {
    const stats = document.getElementById('about-stats');
    if (!stats || !motionEnabled || !('IntersectionObserver' in window)) {
        setStatsVisible(true);
        return undefined;
    }
    const observer = new IntersectionObserver(
        ([entry]) => {
            if (!entry.isIntersecting) return;
            setStatsVisible(true);
            observer.disconnect();
        },
        { threshold: 0.6 },
    );
    observer.observe(stats);
    return () => observer.disconnect();
}, [motionEnabled]);

useEffect(() => {
    if (!statsVisible) return undefined;
    const targets = [3, 3, 70, 3];
```

```
        if (!motionEnabled) {
            setDisplayCounts(targets);
            return undefined;
        }

        let frame;
        let startTime;
        const animateCounts = (time) => {
            if (startTime === undefined) startTime = time;
            const progress = Math.min((time - startTime) / 1000, 1);
            setDisplayCounts(targets.map((target) => Math.floor(target * progress)));
            if (progress < 1) frame = requestAnimationFrame(animateCounts);
        };
        frame = requestAnimationFrame(animateCounts);
        return () => cancelAnimationFrame(frame);
    }, [motionEnabled, statsVisible]);

    useEffect(() => {
        const cursor = cursorRef.current;
        if (!cursor || !motionEnabled || !window.matchMedia('(hover: hover) and (pointer: fine)').matches) {
            return undefined;
        }

        let frame;
        const onMouseMove = (event) => {
            cursorPosition.current.targetX = event.clientX;
            cursorPosition.current.targetY = event.clientY;
        };
        const onMouseOver = (event) => {
            setCursorHover(Boolean(event.target.closest('a, button, input, textarea')));
        };
        const followCursor = () => {
            const position = cursorPosition.current;
            position.x += (position.targetX - position.x) * 0.2;
            position.y += (position.targetY - position.y) * 0.2;
            cursor.style.transform = `translate(${position.x}px, ${position.y}px)`;
            frame = requestAnimationFrame(followCursor);
        };

        document.addEventListener('mousemove', onMouseMove);
        document.addEventListener('mouseover', onMouseOver);
        frame = requestAnimationFrame(followCursor);
        return () => {
            document.removeEventListener('mousemove', onMouseMove);
            document.removeEventListener('mouseover', onMouseOver);
            cancelAnimationFrame(frame);
        };
    }, [motionEnabled]);

    const changeTheme = () => {
        const nextTheme = theme === 'charcoal' ? 'midnight' : 'charcoal';
        setTheme(nextTheme);
        try {
            localStorage.setItem('theme', nextTheme);
        } catch {
            // The visual preference still applies for this page view.
        }
    };

    const changeMotion = () => {
        const nextMotion = !motionEnabled;
        setMotionEnabled(nextMotion);
        if (!nextMotion) setPortraitDirection('center');
        try {
            localStorage.setItem('motion', nextMotion ? 'on' : 'off');
        } catch {
            // The visual preference still applies for this page view.
        }
    };

    const timecode = Math.round(progress * 180);
    const timecodeLabel = `${String(Math.floor(timecode / 60)).padStart(2, '0')}:${String(timecode % 60).padStart(2,
'0')}:${String(Math.floor((progress * 180 * 30) % 30)).padStart(2, '0')}`;

    const submitContact = (event) => {
        event.preventDefault();
        const errors = {};
        if (contact.name.trim().length < 2) errors.name = 'Please enter your name (at least 2 characters).';
        if (!/^[^\s@]+@[^\s@]+\.[^\s@]+$/.test(contact.email.trim())) {
            errors.email = 'Please enter a valid email, like name@example.com.';
        }
        if (contact.message.trim().length < 10) errors.message = 'Please write a message of at least 10 characters.';
        setContactErrors(errors);
```

```
        setContactSuccess('');
        if (Object.keys(errors).length === 0) {
            setContactSuccess(`Thanks, ${contact.name.trim()}. Your message passed validation. (This demo form does not send
messages.)`);
            setContact({ name: '', email: '', message: '' });
        }
    };

    const moveHeroSpotlight = (event) => {
        if (!motionEnabled) return;
        const bounds = event.currentTarget.getBoundingClientRect();
        const x = ((event.clientX - bounds.left) / bounds.width) * 100;
        const y = ((event.clientY - bounds.top) / bounds.height) * 100;
        event.currentTarget.style.setProperty('--spotlight-x', `${x}%`);
        event.currentTarget.style.setProperty('--spotlight-y', `${y}%`);

        if (
            !['mouse', 'pen'].includes(event.pointerType) ||
            !window.matchMedia('(hover: hover) and (pointer: fine)').matches ||
            !portraitFrameRef.current
        ) return;

        const portraitBounds = portraitFrameRef.current.getBoundingClientRect();
        const offsetX = (event.clientX - (portraitBounds.left + portraitBounds.width / 2)) / portraitBounds.width;
        const offsetY = (event.clientY - (portraitBounds.top + portraitBounds.height / 2)) / portraitBounds.height;
        const horizontalDistance = Math.abs(offsetX);
        const verticalDistance = Math.abs(offsetY);

        if (Math.max(horizontalDistance, verticalDistance) < 0.2) {
            setPortraitDirection('center');
        } else if (horizontalDistance >= verticalDistance) {
            setPortraitDirection(offsetX < 0 ? 'left' : 'right');
        } else {
            setPortraitDirection(offsetY < 0 ? 'up' : 'down');
        }
    };

    const moveProjectCard = (event) => {
        if (!motionEnabled || !window.matchMedia('(hover: hover) and (pointer: fine)').matches) return;
        const bounds = event.currentTarget.getBoundingClientRect();
        const x = (event.clientX - bounds.left) / bounds.width;
        const y = (event.clientY - bounds.top) / bounds.height;
        event.currentTarget.style.setProperty('--tilt-x', `${(0.5 - y) * 5}deg`);
        event.currentTarget.style.setProperty('--tilt-y', `${(x - 0.5) * 5}deg`);
        event.currentTarget.style.setProperty('--shine-x', `${x * 100}%`);
        event.currentTarget.style.setProperty('--shine-y', `${y * 100}%`);
    };

    const resetProjectCard = (event) => {
        event.currentTarget.style.removeProperty('--tilt-x');
        event.currentTarget.style.removeProperty('--tilt-y');
        event.currentTarget.style.removeProperty('--shine-x');
        event.currentTarget.style.removeProperty('--shine-y');
    };

    const renderProject = (project) => {
        const technologies = (project.tech_stack || '').split(',').map((tech) => tech.trim()).filter(Boolean);
        const completedDate = project.completed_date
            ? new Date(`${project.completed_date}T00:00:00`).toLocaleDateString(undefined, { year: 'numeric', month: 'short',
day: 'numeric' })
            : 'Date not set';
        const opensNewTab = project.project_url?.startsWith('http');

        return (
            <article
                key={project.id}
                className="project-card reveal group grid gap-5 border-t-2 border-line border-l-4 border-l-transparent py-6
transition-colors hover:border-l-brand hover:bg-gradient-to-r hover:from-solid hover:to-blue-900/70 hover:text-white md:-mx-4
md:grid-cols-[1fr_15rem] md:px-4"
                data-category={project.category}
                onPointerMove={moveProjectCard}
                onPointerLeave={resetProjectCard}
            >
                <div>
                    <div className="mb-2 flex flex-wrap items-center justify-between gap-3">
                        <h3 className="font-display text-4xl font-extrabold uppercase leading-none sm:text-5xl">
                            {project.title}
                        </h3>
                        <span className="rounded-sm border-2 border-line px-3 py-1.5 text-xs font-bold uppercase tracking-wide">
                            {project.category}
                        </span>
                    </div>
                    <p className="mt-3 max-w-prose text-mute group-hover:text-white">{project.excerpt}</p>
```

```
                    <ul className="mt-3 flex flex-wrap gap-x-4 font-mono text-sm text-brand group-hover:text-white">
                        {technologies.map((tech) => <li key={`${project.id}-${tech}`}>{tech}</li>)}
                    </ul>
                    {project.description !== project.excerpt ? (
                        <p className="mt-3 max-w-prose text-sm text-mute group-hover:text-white">{project.description}</p>
                    ) : null}
                    <p className="mt-3 flex flex-wrap items-center gap-3 text-sm text-mute">
                        <span>Completed: {completedDate}</span>
                        <span>Difficulty:{project.difficulty}</span>
                    </p>
                    <div className="mt-4 flex flex-wrap gap-3">
                        {project.project_url ? (
                            <a
                                href={project.project_url}
                                target={opensNewTab ? '_blank' : undefined}
                                rel={opensNewTab ? 'noopener noreferrer' : undefined}
                                className="inline-block rounded-sm border-2 border-current px-4 py-2 text-sm font-bold transition
hover:-translate-y-0.5 hover:bg-white hover:text-solid"
                            >
                                View Project
                            </a>
                        ) : null}
                        {project.github_url ? (
                            <a
                                href={project.github_url}
                                target="_blank"
                                rel="noopener noreferrer"
                                className="inline-block rounded-sm border-2 border-current px-4 py-2 text-sm font-bold transition
hover:-translate-y-0.5 hover:bg-white hover:text-solid"
                            >
                                Repository
                            </a>
                        ) : null}
                    </div>
                </div>
                {project.image_url ? (
                    <img
                        src={project.image_url}
                        alt={`Project preview for ${project.title}`}
                        className="aspect-video w-full rounded-sm border-2 border-line object-cover transition duration-300
group-hover:rotate-2 group-hover:scale-105"
                        loading="lazy"
                        onError={(event) => { event.currentTarget.style.display = 'none'; }}
                    />
                ) : (
                    <div className="aspect-video w-full rounded-sm border-2 border-line bg-gradient-to-br from-solid to-blue-900"
aria-hidden="true" />
                )}
            </article>
        );
    };

    return (
        <>
            <Head title="Dwayne Arjon T. Santiago | IT Student Portfolio">
                <meta
                    name="description"
                    content="Portfolio of Dwayne Arjon T. Santiago, a BSIT student focused on backend development, web
development and video editing."
                />
            </Head>
            <div className={`min-h-screen overflow-x-hidden bg-bg font-sans text-ink antialiased transition-colors duration-300
${motionEnabled ? '' : 'reduce-motion'}`}>
                <a href="#main" className="sr-only focus:not-sr-only focus:fixed focus:left-3 focus:top-3 focus:z-50 focus:bg-rec
focus:px-4 focus:py-2 focus:text-white">
                    Skip to content
                </a>

                <header className="sticky top-0 z-40 border-b-2 border-line bg-bg/95 backdrop-blur">
                    <nav className="mx-auto flex h-16 max-w-7xl items-center justify-between gap-4 px-5 sm:px-8" aria-label="Main
navigation">
                        <a href="#home" aria-label="Dwayne Santiago, back to top" className="font-display text-2xl font-black
uppercase tracking-wide">
                            <span aria-hidden="true" className="sm:hidden">DS</span>
                            <span aria-hidden="true" className="hidden sm:inline">D. Santiago</span>
                        </a>
                        <ul className="hidden items-center gap-6 xl:flex">
                            {navigation.map(([id, label]) => (
                                <li key={id}>
                                    <a
                                        className="nav-link border-b-2 border-transparent py-1 text-sm text-mute transition
hover:border-brand hover:text-ink aria-[current=true]:border-rec aria-[current=true]:font-bold aria-[current=true]:text-ink"
                                        href={`#${id}`}
```

```
                                    aria-current={activeSection === id ? 'true' : 'false'}
                                >
                                    {label}
                                </a>
                            </li>
                        ))}
                    </ul>
                    <div className="flex items-center gap-2">
                        <span aria-hidden="true" className="hidden font-mono text-sm sm:inline">{timecodeLabel}</span>
                        <button
                            type="button"
                            aria-label={`Switch color theme (current: ${theme === 'charcoal' ? 'Charcoal' : 'Midnight'})`}
                            onClick={changeTheme}
                            className="rounded-sm border-2 border-line px-2 py-1.5 text-xs font-medium transition
hover:border-brand hover:shadow-[0_0_16px_rgb(96_150_255/0.5)] sm:px-3 sm:text-sm"
                        >
                            {theme === 'charcoal' ? 'Charcoal' : 'Midnight'}
                        </button>
                        <button
                            type="button"
                            aria-pressed={motionEnabled}
                            onClick={changeMotion}
                            className="rounded-sm border-2 border-line px-2 py-1.5 text-xs font-medium transition
hover:border-brand sm:px-3 sm:text-sm"
                        >
                            Motion {motionEnabled ? 'On' : 'Off'}
                        </button>
                        <button
                            type="button"
                            className="rounded-sm border-2 border-line px-3 py-1.5 text-sm font-medium xl:hidden"
                            aria-expanded={mobileOpen}
                            aria-controls="mobile-menu"
                            onClick={() => setMobileOpen((open) => !open)}
                        >
                            Menu
                        </button>
                    </div>
                </nav>
                <ul id="mobile-menu" className={`${mobileOpen ? 'grid' : 'hidden'} grid-cols-2 border-t-2 border-line px-5
pb-3 xl:hidden`}>
                    {navigation.map(([id, label]) => (
                        <li key={id}>
                            <a className="block py-3 text-lg font-medium" href={`#${id}`} onClick={() =>
setMobileOpen(false)}>
                                {label}
                            </a>
                        </li>
                    ))}
                </ul>
                <div
                    className="absolute -bottom-0.5 left-0 h-[3px] bg-gradient-to-r from-brand to-rec"
                    style={{ width: `${progress * 100}%` }}
                    aria-hidden="true"
                />
            </header>

            <main id="main">
                <section
                    id="home"
                    className="portfolio-hero relative flex min-h-[calc(100svh-4rem)] flex-col justify-between overflow-
hidden bg-gradient-to-br from-bg via-solid to-blue-900 pt-8 text-white"
                    aria-labelledby="hero-title"
                    onPointerMove={moveHeroSpotlight}
                    onPointerLeave={() => setPortraitDirection('center')}
                >
                    <div aria-hidden="true" className="pointer-events-none absolute -right-24 top-10 h-[26rem] w-[26rem]
rounded-full bg-brand/20 blur-3xl" />
                    <div className="relative mx-auto w-full max-w-7xl px-5 sm:px-8">
                        <p className="flex flex-wrap items-center gap-x-4 font-mono text-sm">
                            <span className="flex items-center gap-2"><span className="h-2 w-2 animate-blink rounded-full bg-
rec" />OPEN TO OPPORTUNITIES</span>
                            <span>BSIT 3</span>
                            <span>Urdaneta City University</span>
                        </p>
                        <div className="mt-6 flex flex-col gap-6 sm:flex-row sm:items-center sm:justify-between sm:gap-8
lg:gap-10">
                            <h1 id="hero-title" className="min-w-0 font-display text-[12vw] font-black uppercase leading-
[0.9] tracking-tight sm:text-[8vw] lg:text-8xl xl:text-9xl">
                                <span className="block overflow-hidden"><span className="block animate-up [animation-
delay:.05s]">Dwayne Arjon T.</span></span>
                                <span className="block overflow-hidden"><span className="block animate-up [animation-
delay:.2s]">Santiago</span></span>
                            </h1>
```

```
                                <figure className="order-first shrink-0 self-start animate-float sm:order-last sm:self-auto">
                                    <div ref={portraitFrameRef} className="portrait-frame w-32 rounded-md bg-gradient-to-br from-
brand via-solid to-rec bg-[length:300%_300%] p-[3px] sm:w-40 md:w-48 lg:w-60 xl:w-72">
                                        <div className="portrait-frame__stage relative aspect-[4/5] overflow-hidden rounded-sm">
                                            {Object.entries(portraitImages).map(([direction, src]) => (
                                                <img
                                                    key={direction}
                                                    src={src}
                                                    alt={direction === portraitDirection ? 'Portrait of Dwayne Arjon T. Santiago'
: ''}
                                                    aria-hidden={direction !== portraitDirection}
                                                    className={`portrait-frame__image absolute inset-0 h-full w-full object-cover
object-top ${direction === portraitDirection ? 'is-active' : ''}`}
                                                />
                                            ))}
                                        </div>
                                    </div>
                                </figure>
                            </div>
                            <div className="mt-8 grid gap-6 xl:grid-cols-[1fr_auto] xl:items-end">
                                <div>
                                    <p className="font-display text-4xl font-black uppercase leading-none sm:text-5xl">Code by
day, edits by night.</p>
                                    <p className="mt-3 font-display text-xl font-extrabold uppercase tracking-wide text-brand
sm:text-2xl">IT Student • Backend Developer • Creative Editor</p>
                                    <p className="mt-3 max-w-3xl text-lg text-white">Based in Urdaneta City, Pangasinan. I build
the logic behind web apps and cut the videos that go with them. Third-year BSIT student, 70 videos in the bag and counting.</p>
                                </div>
                                <div className="flex flex-wrap gap-3 xl:justify-end">
                                    <a href="#projects" className="animate-pulsering rounded-sm bg-gradient-to-r from-brand to-
cyan-300 bg-[length:200%_100%] px-6 py-3 font-bold text-bg transition-all duration-500 hover:-translate-y-1 hover:bg-right
hover:shadow-[0_10px_30px_-8px_rgb(96_150_255/0.8)]">View My Work</a>
                                    <a href="#contact" className="rounded-sm border-2 border-slate-500 px-6 py-3 font-bold
transition hover:-translate-y-1 hover:border-brand hover:text-brand">Contact Me</a>
                                </div>
                            </div>
                        </div>
                        <a
                            href="#about"
                            className="hero-scroll-cue absolute bottom-16 left-1/2 z-10 hidden -translate-x-1/2 flex-col items-
center gap-2 font-mono text-[10px] uppercase tracking-[0.25em] text-white/70 transition hover:text-white sm:flex"
                            aria-label="Scroll to About me"
                        >
                            <span>Scroll to explore</span>
                            <span aria-hidden="true" className="text-xl">↓</span>
                        </a>
                        <div className="relative mt-10 overflow-hidden border-t-2 border-white/40 py-3" aria-hidden="true">
                            <div className="flex w-max animate-ticker gap-10 whitespace-nowrap font-display text-2xl font-
extrabold uppercase hover:[animation-play-state:paused]">
                                <span>Code by day / Edits by night / Backend Development / Web Development / Video Editing / HTML
CSS JavaScript /</span>
                                <span>Code by day / Edits by night / Backend Development / Web Development / Video Editing / HTML
CSS JavaScript /</span>
                            </div>
                        </div>
                    </section>

                    <section id="about" className="about-section relative isolate overflow-hidden py-20" aria-labelledby="about-
title">
                        <div className="relative z-10 mx-auto max-w-7xl px-5 sm:px-8">
                            <h2 id="about-title" className={titleClass}>About me</h2>
                            <div className="about-layout mt-12 grid gap-8 xl:grid-cols-[1.2fr_0.8fr] xl:items-stretch">
                                <div>
                                    <div className="reveal mb-8 flex items-center gap-4">
                                        <div role="img" aria-label="Avatar placeholder with the initials DS" className="grid h-20
w-20 shrink-0 place-items-center rounded-full border-2 border-line bg-gradient-to-br from-panel to-solid font-display text-3xl
font-black text-brand about-avatar">DS</div>
                                        <div>
                                            <p className="font-display text-2xl font-extrabold uppercase">Dwayne Arjon T.
Santiago</p>
                                            <p className="mt-1 font-mono text-xs uppercase tracking-[0.18em] text-brand">IT
student · backend · creative</p>
                                        </div>
                                    </div>
                                    <div className="reveal">
                                        <p className="max-w-prose text-xl">I'm a third-year IT student interested in backend and
web development. I also have experience and interest in video editing and digital content creation. I want to keep improving my
technical skills by building useful, functional and creative projects.</p>
                                        <div className="about-info-card mt-8 border-2 border-line bg-gradient-to-br from-panel
to-bg transition duration-300 hover:border-brand hover:shadow-
[0_0_0_1px_rgb(96_150_255),0_14px_40px_-12px_rgb(96_150_255/0.55)]">
                                            <div className="about-info-bar h-9 border-b-2 border-line bg-[repeating-linear-
gradient(135deg,rgb(var(--line))_0_18px,rgb(var(--bg))_18px_36px)]" />
```

```
                                        <dl className="grid divide-y-2 divide-line sm:grid-cols-2 sm:divide-y-0">
                                            <div className="p-4 sm:border-b-2 sm:border-r-2 sm:border-line"><dt
className="font-mono text-xs text-mute">PROGRAM</dt><dd className="font-bold">BS Information Technology, 3rd Year</dd></div>
                                            <div className="p-4 sm:border-b-2 sm:border-line"><dt className="font-mono text-
xs text-mute">SCHOOL</dt><dd className="font-bold">Urdaneta City University</dd></div>
                                            <div className="p-4 sm:border-r-2 sm:border-line"><dt className="font-mono text-
xs text-mute">CAREER GOAL</dt><dd className="font-bold">Backend and web developer with creative content skills</dd></div>
                                            <div className="p-4"><dt className="font-mono text-xs text-mute">STRENGTHS</dt>
<dd className="font-bold">Problem solving, adaptability, learning by building</dd></div>
                                        </dl>
                                    </div>
                                </div>
                            </div>
                            <aside className="about-showcase reveal" aria-label="About Dwayne">
                                <div className="about-orbit" aria-hidden="true">
                                    <span className="about-orbit__ring about-orbit__ring--outer" />
                                    <span className="about-orbit__ring about-orbit__ring--inner" />
                                    <span className="about-orbit__core">DS</span>
                                    <span className="about-orbit__satellite" />
                                </div>
                                <p className="about-showcase__eyebrow">ABOUT / 001</p>
                                <p className="about-showcase__title">Curious by nature.<br /><span>Building with purpose.
</span></p>
                                <div className="about-showcase__rule" />
                                <div className="about-showcase__footer">
                                    <span>URDANETA CITY</span>
                                    <span>PHILIPPINES · BSIT 03</span>
                                </div>
                            </aside>
                        </div>
                    </div>
                    <div id="about-stats" className="relative z-10 mx-auto mt-12 grid max-w-7xl grid-cols-2 gap-3 px-5 sm:px-
8 lg:grid-cols-4">
                        {[
                            ['rd', 'Year level', 'BS Information Technology'],
                            ['', 'Years editing videos', 'and still hitting export'],
                            ['', 'Videos edited', 'give or take a few retakes'],
                            ['', 'Core technologies', 'HTML, CSS and JavaScript'],
                        ].map(([suffix, label, detail], index) => (
                            <div key={label} className="about-stats-card reveal rounded-sm border-2 border-line bg-gradient-
to-br from-panel to-bg p-5 transition hover:-translate-y-1 hover:border-brand hover:shadow-
[0_0_0_1px_rgb(96_150_255),0_14px_40px_-12px_rgb(96_150_255/0.55)]">
                                <p className="font-display text-6xl font-black leading-none"><span>{displayCounts[index]}
</span><span>{suffix}</span></p>
                                <p className="mt-2 font-bold">{label}</p><p className="text-sm text-mute">{detail}</p>
                            </div>
                        ))}
                    </div>
                </section>

                <section id="services" className="detail-section detail-section--services mx-auto max-w-7xl px-5 pb-20 sm:px-
8" aria-labelledby="services-title">
                    <h2 id="services-title" className={titleClass}>Services</h2>
                    <div className="service-grid mt-12 grid gap-5 md:grid-cols-2">
                        {[
                            ['Video editing', 'I edit videos and create digital content, from cutting and pacing to polishing
the final result.', ['CapCut', 'Content editing']],
                            ['Simple websites', 'I build responsive, clean websites using HTML5, Tailwind CSS and vanilla
JavaScript.', ['HTML5', 'Tailwind CSS', 'JavaScript']],
                        ].map(([heading, description, tools], index) => (
                            <article key={heading} className="service-card reveal group border-2 border-line bg-gradient-to-
br from-panel to-bg p-6 transition hover:-translate-y-1.5 hover:border-brand hover:shadow-
[0_0_0_1px_rgb(96_150_255),0_14px_40px_-12px_rgb(96_150_255/0.55)]">
                                <div className="service-card__top">
                                    <span className="service-card__number">0{index + 1}</span>
                                    <span className="service-card__type">{index === 0 ? 'CREATIVE' : 'WEB DEVELOPMENT'}
</span>
                                </div>
                                <h3 className="service-card__title font-display text-4xl font-extrabold uppercase leading-
none">{heading}</h3>
                                <p className="mt-3 max-w-xl text-mute">{description}</p>
                                <ul className="service-card__tools mt-6 flex flex-wrap gap-2 font-mono text-sm text-brand">
{tools.map((tool) => <li key={tool}>{tool}</li>)}</ul>
                            </article>
                        ))}
                    </div>
                </section>

                <section id="skills" className="detail-section detail-section--skills mx-auto max-w-7xl px-5 pb-20 sm:px-8"
aria-labelledby="skills-title">
                    <h2 id="skills-title" className={titleClass}>Skills</h2>
                    <div className="skill-groups mt-12 grid gap-4 sm:grid-cols-2">
                        {[
```

```
                                ['V1', 'Technical', ['HTML5', 'CSS', 'JavaScript', 'Tailwind CSS', 'Backend Development',
'Responsive Web Design']],
                                ['V2', 'Creative', ['Video Editing', 'Content Editing', 'Visual Design']],
                                ['T1', 'Tools', ['VS Code', 'CapCut', 'Canva', 'Photoshop']],
                                ['A1', 'Soft skills', ['Problem Solving', 'Communication', 'Adaptability', 'Continuous
Learning']],
                            ].map(([code, heading, skills]) => (
                                <article key={code} className="skill-card reveal">
                                    <div className="skill-card__heading">
                                        <span className="skill-card__code">{code}</span>
                                        <h3 className="font-display text-3xl font-extrabold uppercase">{heading}</h3>
                                    </div>
                                    <ul className="skill-card__list flex flex-wrap gap-2">
                                        {skills.map((skill) => <li key={skill} className="skill-chip rounded-sm border-2 border-
line px-3 py-1 text-sm font-medium transition hover:-translate-y-0.5 hover:border-brand hover:bg-brand hover:text-bg
hover:shadow-[0_0_16px_rgb(96_150_255/0.5)]">{skill}</li>)}
                                    </ul>
                                </article>
                            ))}
                        </div>
                    </section>

                    <section id="journey" className="journey-section relative isolate overflow-hidden px-5 py-20 sm:px-8" aria-
labelledby="journey-title">
                        <div className="mx-auto max-w-7xl">
                            <div className="journey-heading">
                                <div>
                                    <p className="journey-kicker">LEARNING IN PROGRESS / 01—05</p>
                                    <h2 id="journey-title" className={titleClass}>Developer Journey</h2>
                                </div>
                                <p className="journey-instruction">Select a stage to explore the path.</p>
                            </div>
                            <div className="journey-timeline relative mt-12">
                                <div className="journey-rail absolute left-[10%] right-[10%] top-3 h-1 bg-line">
                                    <div className="h-full bg-gradient-to-r from-brand to-rec transition-[width] duration-500"
style={{ width: activeStage === null ? 0 : `${(activeStage / 4) * 100}%` }} />
                                </div>
                                <ol className="journey-stage-list grid grid-cols-5 gap-1 max-[639px]:grid-cols-1">
                                    {journeyStages.map(([heading], index) => (
                                        <li key={heading} className="journey-stage">
                                            <button type="button" className="journey-stage__button group flex w-full flex-col
items-center gap-3 text-center max-[639px]:flex-row max-[639px]:justify-start max-[639px]:gap-4" aria-pressed={activeStage ===
index} aria-controls="journey-stage-detail" onClick={() => setActiveStage(index)}>
                                                <span className={`journey-stage__marker relative z-10 h-6 w-6 rounded-full
border-2 bg-bg transition group-hover:scale-125 max-[639px]:h-4 max-[639px]:w-4 max-[639px]:shrink-0 ${activeStage === index ?
'scale-125 border-rec bg-rec shadow-[0_0_6px_rgb(239_83_80/0.3)]' : 'border-mute'}`} />
                                                <span className={`journey-stage__label break-words text-[11px] leading-tight
sm:text-sm ${activeStage === index ? 'font-bold' : 'font-medium'}`}>{heading}</span>
                                            </button>
                                        </li>
                                    ))}
                                </ol>
                            </div>
                            <div id="journey-stage-detail" className="journey-detail mt-10" aria-live="polite">
                                <span className="journey-detail__index">{activeStage === null ? 'SELECT A STAGE' : `STAGE
0${activeStage + 1}`}</span>
                                <p className="journey-detail__text text-xl text-mute">{activeStage === null ? 'Choose a point on
the timeline to see what I am learning and working toward.' : journeyStages[activeStage][1]}</p>
                            </div>
                        </div>
                    </section>

                    <section id="projects" className="mx-auto max-w-7xl px-5 py-20 sm:px-8" aria-labelledby="projects-title">
                        <div>
                            <h2 id="projects-title" className={titleClass}>Projects</h2>
                        </div>
                        <p className="mt-4 max-w-2xl text-lg text-mute">Selected web and creative work. Projects are managed
through the Laravel admin dashboard.</p>
                        <div className="mt-8 flex flex-wrap gap-2" role="group" aria-label="Filter projects by category">
                            {[
                                ['all', 'All'],
                                ['web', 'Web Development'],
                                ['creative', 'Creative'],
                            ].map(([value, label]) => (
                                <button
                                    key={value}
                                    type="button"
                                    className={`${buttonClass} ${filter === value ? 'border-brand bg-brand font-bold text-bg' :
''}`}
                                    aria-pressed={filter === value}
                                    onClick={() => setFilter(value)}
                                >
                                    {label}
```

```
                            </button>
                        ))}
                    </div>
                    <div className="mt-10 border-b-2 border-line">
                        {visibleProjects.map(renderProject)}
                        {visibleProjects.length === 0 ? (
                            <p className="mt-6 border-2 border-dashed border-line p-5" role="status">
                                {projects.length === 0 ? 'No projects have been added yet.' : 'No projects in this category
yet. Try another filter.'}
                            </p>
                        ) : null}
                    </div>
                </section>

                <section id="youtube-performance" className="mx-auto max-w-7xl px-5 pb-20 sm:px-8" aria-labelledby="youtube-
performance-title">
                    <h2 id="youtube-performance-title" className={titleClass}>YouTube Performance</h2>
                    <p className="mt-4 max-w-2xl text-lg text-mute">A snapshot of my YouTube channel analytics and video
content performance.</p>
                    <div className="mt-8 grid gap-6 lg:grid-cols-[1.2fr_1fr] lg:items-start">
                        <figure className="overflow-hidden rounded-sm border-2 border-line bg-panel p-2 transition duration-
300 hover:border-brand hover:shadow-[0_0_0_1px_rgb(96_150_255),0_14px_40px_-12px_rgb(96_150_255/0.35)]">
                            <img src="/images/ytchannel.png" alt="Screenshot of my YouTube Studio channel analytics"
className="w-full rounded-sm object-contain" loading="lazy" />
                            <figcaption className="mt-2 px-2 pb-1 text-sm text-mute">YouTube Studio analytics
screenshot</figcaption>
                        </figure>
                        <div className="grid gap-4 sm:grid-cols-2 lg:grid-cols-1">
                            {[
                                ['VIEWS', '279K+', 'Views shown in the analytics screenshot'],
                                ['WATCH TIME', '605.2', 'Hours of watch time'],
                                ['SUBSCRIBERS', '+394', 'Subscribers gained in the shown period'],
                            ].map(([label, amount, description], index) => (
                                <article key={label} className={`reveal rounded-sm border-2 border-line bg-gradient-to-br
from-panel to-bg p-6 transition hover:-translate-y-1 hover:border-brand ${index === 2 ? 'sm:col-span-2 lg:col-span-1' : ''}`}>
                                    <p className="font-mono text-xs text-mute">{label}</p>
                                    <p className="mt-2 font-display text-5xl font-black text-brand">{amount}</p>
                                    <p className="mt-1 text-sm text-mute">{description}</p>
                                </article>
                            ))}
                            <a href="https://www.youtube.com/channel/UCuOyhQLtnnMiJHZPuaZqA3Q" target="_blank" rel="noopener
noreferrer" className="inline-block rounded-sm bg-gradient-to-r from-brand to-cyan-300 px-6 py-3 text-center font-bold text-bg
transition hover:-translate-y-1 hover:shadow-[0_10px_30px_-8px_rgb(96_150_255/0.8)]">Visit My YouTube Channel ↗</a>
                        </div>
                    </div>
                </section>

                <section id="education" className="detail-section detail-section--education mx-auto max-w-7xl px-5 pb-20
sm:px-8" aria-labelledby="edu-title">
                    <h2 id="edu-title" className={titleClass}>Education</h2>
                    <ol className="education-list mt-12 grid gap-4 md:grid-cols-3">
                        {[
                            ['Education', <><strong className="text-ink">BS Information Technology</strong>, Urdaneta City
University, 3rd Year</>],
                            ['Coursework', <><strong className="text-ink">Advanced Web Development (IT ELEC01)</strong> and a
Cryptography Protocols Laboratory covering HTTPS/TLS and VPN concepts.</>],
                            ['Experience', <><strong className="text-ink">Video editing and digital content
creation</strong>, about 3 years and around 70 videos edited using CapCut.</>],
                        ].map(([heading, description], index) => (
                            <li key={heading} className="education-card reveal">
                                <span className="education-card__index" aria-hidden="true">0{index + 1}</span>
                                <h3 className="education-card__title font-display text-2xl font-extrabold uppercase">
{heading}</h3>
                                <p className="education-card__description text-mute">{description}</p>
                            </li>
                        ))}
                    </ol>
                </section>

                <section id="contact" className="bg-gradient-to-tr from-blue-900 via-solid to-bg px-5 py-20 text-white sm:px-
8" aria-labelledby="contact-title">
                    <div className="mx-auto grid max-w-7xl gap-12 lg:grid-cols-2">
                        <div>
                            <h2 id="contact-title" className={titleClass}>Let's work together</h2>
                            <p className="mt-6 max-w-md text-lg">Got a video to cut or a site to build? Say hi.</p>
                            <ul className="mt-6 space-y-3 font-medium">
                                <li><a className="underline underline-offset-4 hover:no-underline"
href="mailto:dwayne26arjon@gmail.com">Email: dwayne26arjon@gmail.com</a></li>
                                <li><a href="https://www.youtube.com/channel/UCuOyhQLtnnMiJHZPuaZqA3Q" target="_blank"
rel="noopener noreferrer" className="underline underline-offset-4 hover:no-underline">YouTube channel (opens in new tab)</a></li>
                                <li>Based in Urdaneta City, Pangasinan, Philippines</li>
                            </ul>
                        </div>
```

```
                            <form noValidate className="space-y-4 self-end" onSubmit={submitContact}>
                                {[
                                    ['name', 'Name', 'text', 'name'],
                                    ['email', 'Email', 'email', 'email'],
                                ].map(([name, label, type, autocomplete]) => (
                                    <div key={name}>
                                        <label htmlFor={`contact-${name}`} className="mb-1 block text-sm font-bold">{label}
</label>
                                        <input
                                            id={`contact-${name}`}
                                            type={type}
                                            autoComplete={autocomplete}
                                            aria-describedby={`${name}-error`}
                                            aria-invalid={Boolean(contactErrors[name])}
                                            value={contact[name]}
                                            onChange={(event) => setContact({ ...contact, [name]: event.target.value })}
                                            className={fieldClass}
                                        />
                                        <p id={`${name}-error`} className="mt-1 text-sm font-semibold text-red-300">
{contactErrors[name] || ''}</p>
                                    </div>
                                ))}
                                <div>
                                    <label htmlFor="contact-message" className="mb-1 block text-sm font-bold">Message</label>
                                    <textarea
                                        id="contact-message"
                                        rows="5"
                                        aria-describedby="message-error"
                                        aria-invalid={Boolean(contactErrors.message)}
                                        value={contact.message}
                                        onChange={(event) => setContact({ ...contact, message: event.target.value })}
                                        className={fieldClass}
                                    />
                                    <p id="message-error" className="mt-1 text-sm font-semibold text-red-300">
{contactErrors.message || ''}</p>
                                </div>
                                <button type="submit" className="rounded-sm bg-gradient-to-r from-brand to-cyan-300 bg-
[length:200%_100%] px-8 py-3 font-bold text-bg transition-all duration-500 hover:-translate-y-1 hover:bg-right hover:shadow-
[0_10px_30px_-8px_rgb(96_150_255/0.8)]">Send message</button>
                                {contactSuccess ? <p role="status" className="rounded-sm border-2 border-brand bg-panel p-4 font-
semibold text-ink">{contactSuccess}</p> : null}
                            </form>
                        </div>
                    </section>
                </main>

                <footer className="bg-gradient-to-b from-bg to-slate-950 text-slate-300">
                    <div className="mx-auto grid max-w-7xl gap-8 px-5 py-10 sm:px-8 md:grid-cols-3">
                        <div>
                            <p className="font-display text-2xl font-black uppercase text-white">Dwayne Arjon T. Santiago</p>
                            <p className="mt-2 text-sm">Aspiring IT professional building useful, functional and creative
projects.</p>
                        </div>
                        <nav aria-label="Footer navigation">
                            <ul className="space-y-2 text-sm">
                                {['about', 'projects', 'youtube-performance', 'contact'].map((id) => (
                                    <li key={id}><a className="hover:text-white hover:underline" href={`#${id}`}>
{navigation.find(([navId]) => navId === id)?.[1]}</a></li>
                                ))}
                            </ul>
                        </nav>
                        <ul className="space-y-2 text-sm">
                            <li><a className="hover:text-white hover:underline"
href="mailto:dwayne26arjon@gmail.com">dwayne26arjon@gmail.com</a></li>
                            <li><a className="hover:text-white hover:underline"
href="https://www.youtube.com/channel/UCuOyhQLtnnMiJHZPuaZqA3Q" target="_blank" rel="noopener noreferrer">YouTube</a></li>
                            <li>Urdaneta City, Philippines</li>
                        </ul>
                    </div>
                    <p className="border-t border-slate-800 px-5 py-4 text-center text-sm">© {new Date().getFullYear()} Dwayne
Arjon T. Santiago. Designed and built with Laravel, React &amp;amp; Inertia.</p>
                </footer>
                <div ref={cursorRef} aria-hidden="true" className="pointer-events-none fixed left-0 top-0 z-[60] hidden
md:block">
                    <div className={`h-8 w-8 -translate-x-1/2 -translate-y-1/2 rounded-full border-2 border-brand transition
duration-200 ${cursorHover ? 'scale-150 bg-brand/20' : ''}`} />
                </div>
            </div>
        </>
    );
}
```

Reusable project form — resources/js/Components/ProjectForm.jsx

Uses Inertia useForm for create/update requests and field-level errors.

```
import { useForm } from '@inertiajs/react';

const defaultValues = {
    title: '',
    slug: '',
    category: 'Web Development',
    difficulty: '',
    excerpt: '',
    description: '',
    tech_stack: '',
    completed_date: '',
    project_url: '',
    github_url: '',
    image_url: '',
    featured: false,
};

export default function ProjectForm({ project = null, errors = {} }) {
    const isEditing = Boolean(project);
    const { data, setData, post, put, processing } = useForm({
        ...defaultValues,
        ...(project ?? {}),
        completed_date: project?.completed_date?.slice(0, 10) ?? '',
        featured: Boolean(project?.featured ?? false),
    });

    const submit = (event) => {
        event.preventDefault();

        if (isEditing) {
            put(`/admin/projects/${project.id}`);
            return;
        }

        post('/admin/projects');
    };

    return (
        <form onSubmit={submit}>
            <div className="form-grid">
                <div className="field">
                    <label htmlFor="title">Project title</label>
                    <input
                        id="title"
                        value={data.title}
                        onChange={(event) => setData('title', event.target.value)}
                        placeholder="Northwind Analytics"
                    />
                    {errors.title ? <span className="error-message">{errors.title}</span> : null}
                </div>

                <div className="field">
                    <label htmlFor="slug">Slug</label>
                    <input
                        id="slug"
                        value={data.slug}
                        onChange={(event) => setData('slug', event.target.value)}
                        placeholder="northwind-analytics"
                    />
                    {errors.slug ? <span className="error-message">{errors.slug}</span> : null}
                </div>

                <div className="field">
                    <label htmlFor="category">Category</label>
                    <select
                        id="category"
                        value={data.category}
                        onChange={(event) => setData('category', event.target.value)}
                    >
                        <option value="Web Development">Web Development</option>
                        <option value="Creative">Creative</option>
                        <option value="Web App">Web App</option>
                        <option value="UI/UX">UI/UX</option>
                        <option value="Branding">Branding</option>
                        <option value="Mobile">Mobile</option>
```

```
                        <option value="Data">Data</option>
                    </select>
                    {errors.category ? <span className="error-message">{errors.category}</span> : null}
                </div>

                <div className="field">
                    <label htmlFor="difficulty">Difficulty</label>
                    <select
                        id="difficulty"
                        value={data.difficulty}
                        onChange={(event) => setData('difficulty', event.target.value)}
                    >
                        <option value="">Select difficulty</option>
                        <option value="Easy">Easy</option>
                        <option value="Medium">Medium</option>
                        <option value="Hard">Hard</option>
                    </select>
                    {errors.difficulty ? <span className="error-message">{errors.difficulty}</span> : null}
                </div>

                <div className="field">
                    <label htmlFor="tech_stack">Tech stack</label>
                    <input
                        id="tech_stack"
                        value={data.tech_stack}
                        onChange={(event) => setData('tech_stack', event.target.value)}
                        placeholder="Laravel, React, Tailwind"
                    />
                    {errors.tech_stack ? <span className="error-message">{errors.tech_stack}</span> : null}
                </div>

                <div className="field">
                    <label htmlFor="completed_date">Completion date</label>
                    <input
                        id="completed_date"
                        type="date"
                        value={data.completed_date}
                        onChange={(event) => setData('completed_date', event.target.value)}
                    />
                    {errors.completed_date ? <span className="error-message">{errors.completed_date}</span> : null}
                </div>

                <div className="field full-span">
                    <label htmlFor="excerpt">Excerpt</label>
                    <input
                        id="excerpt"
                        value={data.excerpt}
                        onChange={(event) => setData('excerpt', event.target.value)}
                        placeholder="A SaaS dashboard for modern operations teams."
                    />
                    {errors.excerpt ? <span className="error-message">{errors.excerpt}</span> : null}
                </div>

                <div className="field full-span">
                    <label htmlFor="description">Detailed description</label>
                    <textarea
                        id="description"
                        value={data.description}
                        onChange={(event) => setData('description', event.target.value)}
                        placeholder="Describe your solution, challenges, and impact..."
                    />
                    {errors.description ? <span className="error-message">{errors.description}</span> : null}
                </div>

                <div className="field">
                    <label htmlFor="project_url">Project URL</label>
                    <input
                        id="project_url"
                        type="text"
                        value={data.project_url}
                        onChange={(event) => setData('project_url', event.target.value)}
                        placeholder="https://example.com"
                    />
                    {errors.project_url ? <span className="error-message">{errors.project_url}</span> : null}
                </div>

                <div className="field">
                    <label htmlFor="github_url">GitHub URL</label>
                    <input
                        id="github_url"
                        value={data.github_url}
                        onChange={(event) => setData('github_url', event.target.value)}
                        placeholder="https://github.com/username/project"
```

```
                    />
                    {errors.github_url ? <span className="error-message">{errors.github_url}</span> : null}
                </div>

                <div className="field full-span">
                    <label htmlFor="image_url">Image URL</label>
                    <input
                        id="image_url"
                        value={data.image_url}
                        onChange={(event) => setData('image_url', event.target.value)}
                        placeholder="https://images.unsplash.com/..."
                    />
                    {errors.image_url ? <span className="error-message">{errors.image_url}</span> : null}
                </div>

                <div className="field full-span checkbox-field">
                    <input
                        id="featured"
                        type="checkbox"
                        checked={data.featured}
                        onChange={(event) => setData('featured', event.target.checked)}
                    />
                    <label htmlFor="featured">Mark as featured project</label>
                </div>
            </div>

            <div className="form-actions">
                {isEditing ? (
                    <button type="button" className="secondary-button" onClick={() => window.location.href = '/admin/projects'}>
                        Cancel
                    </button>
                ) : null}
                <button type="submit" className="submit-button" disabled={processing}>
                    {processing ? 'Saving...' : isEditing ? 'Update project' : 'Create project'}
                </button>
            </div>
        </form>
    );
}
```

Validation feature tests — tests/Feature/ProjectValidationTest.php

Covers routes, required data, formatting, uniqueness, retained input, and Difficulty updates.

```
<?php

namespace Tests\Feature;

use App\Models\Project;
use Illuminate\Foundation\Testing\RefreshDatabase;
use Inertia\Testing\AssertableInertia as Assert;
use Tests\TestCase;

class ProjectValidationTest extends TestCase
{
    use RefreshDatabase;

    public function test_create_and_edit_routes_render_dedicated_pages(): void
    {
        $this->get('/admin/projects')
            ->assertInertia(fn (Assert $page) => $page->component('Admin/Projects/Index'));

        $this->get('/admin/projects/create')
            ->assertInertia(fn (Assert $page) => $page->component('Admin/Projects/Create'));

        $project = Project::create($this->validProjectData());

        $this->get("/admin/projects/{$project->id}/edit")
            ->assertInertia(fn (Assert $page) => $page
                ->component('Admin/Projects/Edit')
                ->where('project.id', $project->id));
    }

    public function test_empty_project_form_reports_required_field_errors(): void
    {
        $this->from('/admin/projects/create')
            ->post('/admin/projects', [])
            ->assertSessionHasErrors([
                'title',
                'slug',
                'category',
                'difficulty',
                'excerpt',
                'description',
                'tech_stack',
            ]);
    }

  public function test_invalid_difficulty_is_rejected(): void
   {
       $this->from('/admin/projects/create')
           ->post('/admin/projects', [
               ...$this->validProjectData(),
              'difficulty' => 'Very hard',
           ])
           ->assertSessionHasErrors('difficulty');
   }


    public function test_title_cannot_exceed_its_maximum_length(): void
    {
        $this->from('/admin/projects/create')
            ->post('/admin/projects', [
                ...$this->validProjectData(),
                'title' => str_repeat('a', 121),
            ])
            ->assertSessionHasErrors('title');
    }

    public function test_slug_format_error_uses_a_custom_message(): void
    {
        $this->from('/admin/projects/create')
            ->post('/admin/projects', [
                ...$this->validProjectData(),
                'slug' => 'Not a valid slug',
            ])
            ->assertSessionHasErrors([
                'slug' => 'The slug may only contain lowercase letters, numbers, and hyphens.',
            ]);
```

```
    }

    public function test_invalid_github_url_reports_error_and_retains_input(): void
    {
        $projectData = [
            ...$this->validProjectData(),
            'github_url' => 'not-a-url',
        ];

        $this->from('/admin/projects/create')
            ->post('/admin/projects', $projectData)
            ->assertSessionHasErrors([
                'github_url' => 'The GitHub link must be a valid URL.',
            ])
            ->assertSessionHas('_old_input', fn (array $input): bool => ($input['title'] ?? null) === $projectData['title']
                && ($input['github_url'] ?? null) === $projectData['github_url']);
    }

    public function test_duplicate_slug_is_rejected(): void
    {
        Project::create($this->validProjectData());

        $this->from('/admin/projects/create')
            ->post('/admin/projects', [
                ...$this->validProjectData(),
                'title' => 'Another Project',
            ])
            ->assertSessionHasErrors('slug');
    }

    public function test_update_allows_keeping_the_projects_existing_slug(): void
    {
        $project = Project::create($this->validProjectData());

        $this->put("/admin/projects/{$project->id}", [
            ...$this->validProjectData(),
            'difficulty' => 'Hard',
        ])
            ->assertRedirect('/admin/projects')
            ->assertSessionHasNoErrors();

        $this->assertSame('Hard', $project->refresh()->difficulty);
    }

    private function validProjectData(): array
    {
        return [
            'title' => 'Validation Test Project',
            'slug' => 'validation-test-project',
            'category' => 'Web Development',
            'difficulty' => 'Medium',
            'excerpt' => 'A project used for checking validation rules.',
            'description' => 'A detailed project description that satisfies the minimum length rule.',
            'tech_stack' => 'Laravel, React',
            'project_url' => 'https://example.com/project',
            'github_url' => 'https://github.com/example/project',
            'image_url' => '/images/placeholder.svg',
            'featured' => false,
        ];
    }
}
```

5. Design Decisions

a. Why use a separate resource controller?

The ProjectController keeps the project actions together instead of putting database and CRUD logic in routes/web.php. The routes stay easy to scan, and each action has one clear controller method.

b. Why these validation rules, and where are they placed?

The StoreProjectRequest and UpdateProjectRequest contain server-side rules so invalid data cannot be saved by bypassing the browser. The rules check required fields, length, formats, allowed categories and difficulty levels, optional URLs, and slug uniqueness; the Form Requests also keep the controller focused on saving valid data.

c. How are the React pages and components organized?

The Admin/Projects Index, Create, and Edit pages each handle a distinct screen, while Portfolio/Index.jsx presents the public projects. ProjectForm.jsx is shared by Create and Edit, so field behavior and inline errors are maintained in one place.

d. Why use explicit routes instead of Route::resource()?

The project uses explicit routes in web.php so the exact URLs and actions are visible. It has index, create, store, edit, update, and destroy routes; it does not define an admin show route because the public portfolio displays project details.

6. Validation Test Table

The focused ProjectValidationTest suite was run after adding the update Difficulty rule. All 8 tests passed with 46 assertions.

#	Test case	Input used	Expected result	Actual result	Status
1	Routes render	GET /admin/projects, /create, and /{id}/edit	Dedicated Inertia pages render.	All three route assertions passed.	PASS
2	Empty request	Submit no fields	Required rules return field errors.	Required-field assertion passed, including Difficulty.	PASS
3	Invalid difficulty	difficulty = Very hard	Only Easy, Medium, or Hard is accepted.	Laravel returned a Difficulty validation error.	PASS
4	Title exceeds maximum	121-character title	Title validation error appears.	Title length test passed.	PASS
5	Invalid slug format	Slug = Not a valid slug	Custom slug-format error appears.	Expected custom message w as returned.	PASS
6	Invalid GitHub URL	github_url = not-a-url	Custom URL error appears and old input is retained.	Error and retained input assertions passed.	PASS
7	Duplicate slug	Reuse an existing project slug	Unique rule rejects the duplicate.	Slug error assertion passed.	PASS
8	Edit keeps slug and saves difficulty	Keep current slug; set Difficulty to Hard	Update succeeds and saves the new difficulty.	Redirect/no-error assertions passed; refreshed model contained Hard.	PASS

The browser Create form preselects Web Development for Category. The automated empty-request test posts an empty payload directly, so it checks the required Category rule as well as the other required fields.

Test command: php artisan test --filter=ProjectValidationTest. Result: 8 passed, 46 assertions.

7. Reflection

a. What was the hardest part of converting your portfolio, and how did you solve it?

The hardest part for me was making sure the Difficulty field worked all the way through the app, not just in the form. It needed a database column, a model entry, matching create and update validation, and a dropdown that sends the value. I checked the migration status and ran the validation tests so I could catch duplicate-migration and update issues before calling it done.

b. What did you learn about validation that you did not know before?

I learned that React validation alone is not enough because requests can be sent without using the form. Laravel has to validate the data before saving it. I also learned that update validation must ignore the current project when checking a unique slug, and Inertia can return validation errors to the form without a full page reload.

c. If you had to add a second dynamic section, what would you do differently?

If I add another dynamic section, I would decide the database fields and validation rules before building the form. I would test create and update cases as I add each field, and keep repeated UI in a reusable component so I do not have to maintain the same form logic in multiple pages.

8. Links

Item	Link
GitHub repository	[PASTE YOUR REPOSITORY URL]
Video demonstration	[PASTE YOUR VIEWABLE GOOGLE DRIVE OR UNLISTED YOUTUBE URL]

Before submission, replace the section placeholder and add working repository and video links.