

FAQ-04: How to manage OneAgent updates on Dynatrace SaaS

Series: FAQ — Frequently Asked Questions | **Reference:** 04 — Managing OneAgent Updates (SaaS) | **Created:** May 2026 | **Last Updated:** 09/28/2026

Overview

OneAgent updates are one of the few estate-wide changes Dynatrace performs continuously — most tenants run them silently, on a default that was set at standup and rarely revisited. That default works for the majority of fleets. It does not work for every fleet.

This FAQ is a decision-support entry for the question: *"How should our organization manage OneAgent updates on SaaS?"* It covers the update mechanism, the three available modes, where settings live (tenant / host group / per host), how update windows and maintenance windows interact, the special case for Kubernetes-deployed OneAgents (where DynaKube's `autoUpdate` field is now deprecated in favor of pinning the OneAgent version on the tenant), validation, rollback, and the most common pitfalls.

The intent is not to talk anyone out of auto-update. For most fleets, **automatic at earliest convenience** remains the right answer. The intent is to make the decision deliberate — and to surface the few cases where a different mode is correct.

Scope: SaaS-only. If you run Dynatrace Managed, the Cluster ActiveGate has its own update path and the OneAgent update model is similar but version-pinned at the cluster level; consult Managed-specific docs.

Table of Contents

1. [Why OneAgent Update Cadence Matters](#)
 2. [How OneAgent Updates Work on SaaS](#)
 3. [Update Setting Precedence — Tenant → Host Group → Host](#)
 4. [The Three Update Modes — Decision Framework](#)
 5. [Update Windows vs Maintenance Windows](#)
 6. [Containerized OneAgent — The DynaKube Special Case](#)
 7. [Sequencing Relative to ActiveGate](#)
 8. [Validation After Update](#)
 9. [Rollback Considerations](#)
 10. [Common Pitfalls](#)
 11. [Recommended Approach](#)
-

Prerequisites

Requirement	Details
Audience	Platform team, SRE leads, change-management owners, security stakeholders
Format	Decision-support document — presents trade-offs and recommendations, no hands-on lab
Deployment	Dynatrace SaaS (Managed is briefly noted; not the focus)
Related topic series	ONBRD (Dynatrace Onboarding), K8S (Kubernetes Monitoring), AUTOM (Configuration Automation)
Related FAQ	FAQ-05: How to manage ActiveGate updates on Dynatrace SaaS — sequencing depends on AG version

1. Why OneAgent Update Cadence Matters

Breaking (SaaS 1.347 — staged rollout from 09/08/2026): very old agents are disconnected, not merely unsupported. Verbatim: *"Starting with this release, Dynatrace rejects connections from OneAgent versions 1.241 and earlier."*

This is a different kind of floor from the support policy quoted elsewhere in this entry.

Falling outside Standard or Enterprise support means you stop receiving fixes; falling below 1.241 means the host stops reporting. A fleet on "No automatic updates" (§4) is the population this reaches first, because it is the one that can sit still for years — and the symptom is a monitoring gap, not an error a reader would attribute to a version policy.

Inventory before the rollout reaches you, not after: `fetch dt.entity.host | fields entity.name, installerVersion | sort installerVersion asc` (or the Deployment Status screen) will name any host at or below 1.241. Do not use `smartscapeNodes "HOST"` for this: HOST nodes carry no OneAgent version, so a `oneagent.version` column comes back empty and the check finds nothing. There is no grace path once the rejection lands — the fix is an upgrade.

Breaking (OneAgent 1.347 — pre-release notes, staged rollout planned from 09/22/2026): updating ends monitoring of Java 23. Verbatim: *"Starting from OneAgent version 1.347, Java 23 is no longer monitored."* Support now covers *"LTS versions plus the last four Java versions (24, 25, 26 and 27)."*

This is the reverse of the floor above: here it is the **update** that drops coverage. On a fleet with auto-update on, Java 23 processes stop being monitored the day a host takes 1.347, with no error to explain the gap. The documented choices: *"If you are running Java 23, you can either update to Java 24+ and monitor your processes with OneAgent version 1.347, or you can keep using Java 23 with OneAgent version 1.345 and earlier."* Find your Java 23 processes before the rollout reaches your hosts, and if you must hold them, pin those hosts' OneAgent version (§4) rather than disabling updates fleet-wide. The same release also stops monitoring the `composefs` filesystem, which always reported 100% usage.

OneAgent is the data-collection layer of the platform. Update cadence directly affects:

- **Coverage parity with newly-supported technologies.** New runtime versions, frameworks, and infrastructure types arrive in OneAgent releases. A fleet running an older OneAgent loses coverage on whatever was added since.

- **Bug and CVE remediation.** Fixes for parsing, instrumentation, and security issues ship through normal OneAgent releases. Deferring updates indefinitely defers those fixes.
- **Telemetry feature parity.** New span attributes, K8s metadata, log enrichment fields, and Davis inputs depend on the OneAgent producing them. A lagging fleet produces a thinner data stream.
- **Operator workload.** Every manual coordination cycle — pick a version, schedule a window, validate, repeat — consumes engineering time that auto-update absorbs.

Without active management	With active management	Impact
Fleet drifts across versions silently	Version distribution stays bounded	Coverage and telemetry stay consistent across hosts
New tech support arrives months late	Coverage matches what teams actually run	No "we don't see service X yet" surprises
CVEs sit unpatched on host agents	Fixes propagate with the next release wave	Reduces vulnerability window
Change-management view of "what's deployed" is unclear	Update mode is an intentional, auditable choice	Aligns Dynatrace with the rest of your change governance

In community practice, the most consistent benefit teams report from leaving auto-update on is "we stopped having a OneAgent-version inventory problem." Verify against your own change-control framework.

Sources: [What's new in Dynatrace SaaS 1.347 \(DT docs\)](#) — the OneAgent 1.241 connection-rejection quoted above, [What's new in Dynatrace OneAgent 1.347 \(DT docs\)](#) — the Java 23 and `composefs` changes quoted above, [OneAgent update \(DT docs\)](#) — *"With auto-update enabled, you don't have to worry about manually updating the OneAgents running in your environment."*

2. How OneAgent Updates Work on SaaS

On SaaS, the update flow is straightforward:

1. A new OneAgent version is published to the Dynatrace download infrastructure.

2. Each OneAgent periodically checks whether it should update, based on the effective setting at its scope (per-host → host-group → tenant default).
3. If the effective setting permits, the OneAgent downloads the new installer in the background.
4. On the next eligible moment (immediately, or within the next update window), the OneAgent restarts on the new version.
5. Deep monitoring is re-injected into monitored processes as they restart on their own schedule (or sooner, depending on process type).


A few mechanics that surprise teams new to the platform:

- **The OneAgent process itself updates without restarting monitored applications.** The OS-level OneAgent service restarts; the monitored processes only need to restart for new deep-injection scenarios (e.g., when injection libraries change in a way that requires fresh process startup). Many updates require no application restart at all.
- **Updates are pull-style, not push.** Dynatrace does not actively reach into the host to apply an update; the OneAgent contacts Dynatrace to check eligibility on a recurring interval. This means an offline or network-isolated host catches up when it returns to network reachability.
- **A failed update does not leave the host unmonitored.** The previous version continues running while the new installer is staged; the switchover happens at an eligible moment.
- **Update Now buttons exist at multiple levels.** Individual host and environment-wide "Update now to target version" controls are available in addition to the auto-update flow.

Sources: [OneAgent update \(DT docs\)](#) — describes the three update strategies, the per-scope precedence, and the "Update now" controls.

3. Update Setting Precedence — Tenant → Host Group → Host

Three scopes, in increasing specificity:

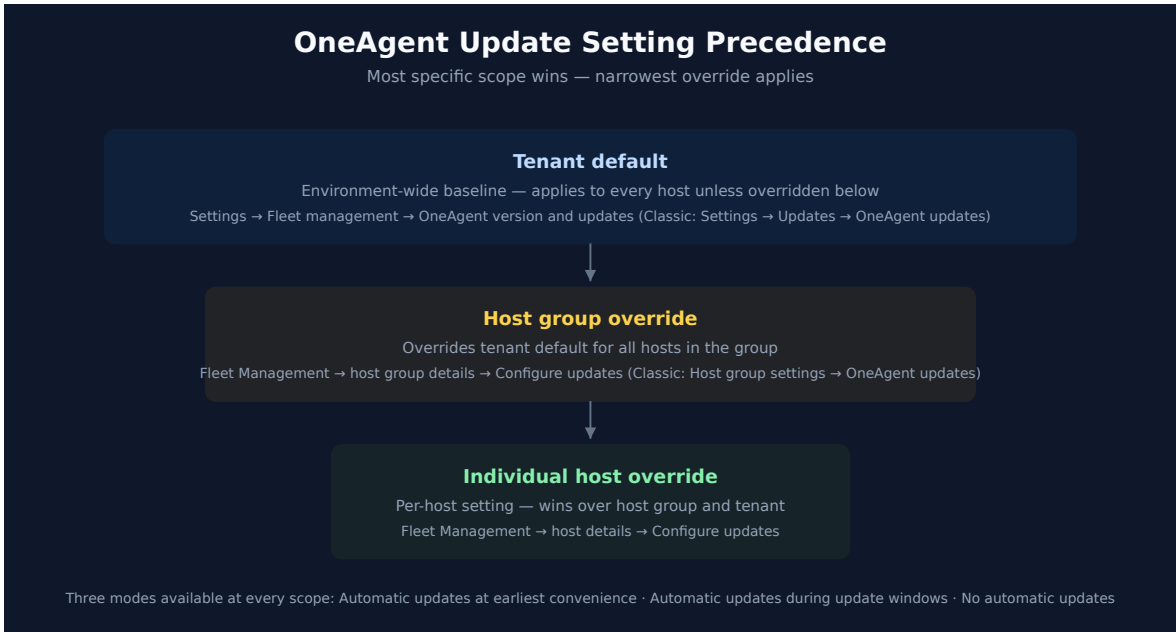

Scope	When to use
Tenant default	The fleet-wide policy. For most tenants this is Automatic updates at earliest convenience Or Automatic updates during update windows , depending on change-control culture.
Host group override	Different cadences for different host groups — e.g., production updates during a Saturday window, nonprod updates at earliest convenience, pci-prod stays on No automatic updates pending change-board approval. This is the most common reason to deviate from the tenant default.
Per-host override	Exceptional cases — a specific host running a workload with strict version-pinning needs, or a host on extended quarantine after an incident. Per-host overrides are powerful but invisible at the fleet-management level; document them.

Where this lives operationally: the host-group setting is the right granularity for almost every real-world policy. Per-host overrides are escape hatches. If you find yourself setting per-host overrides repeatedly across the same group of hosts, that group is telling you it wants to be its own host group.


Sources: [OneAgent update \(DT docs\)](#) — three-level precedence: environment / host group / individual host; Latest Dynatrace: "go to Settings > Fleet management > OneAgent version and updates" and "For host-group- or host-level overrides, open Configure updates from the entity's details in Fleet Management"; Classic: "go to Settings > Updates > OneAgent updates"., [Host groups \(DT docs\)](#) — host-group as the canonical scoping boundary for update settings, alerting overrides, and

thresholds., [oneagentctl \(DT docs\)](#) — `--set-host-group` and related auto-update CLI controls, persistent across reinstalls.

4. The Three Update Modes — Decision Framework

Three modes, available at every scope:

Mode	What it does	When to pick it
Automatic updates at earliest convenience	OneAgent updates as soon as the new version is available and the host is in a position to restart the agent.	Default for nonprod, dev, lab fleets; default for most production fleets without explicit change-control requirements.
Automatic updates during update windows	OneAgent updates only within a configured update window (one-time, daily, weekly, or monthly recurrence).	Fleets with peak-period sensitivity (retail freeze, end-of-month batch jobs) where the update mechanic is fine but the <i>timing</i> needs to be predictable.
No automatic updates	OneAgent never auto-updates; manual "Update now" or pinned-version flows only.	Strict change control (PCI, regulated industries, change-board ratification required) — every version transition is a named, ticketed change.

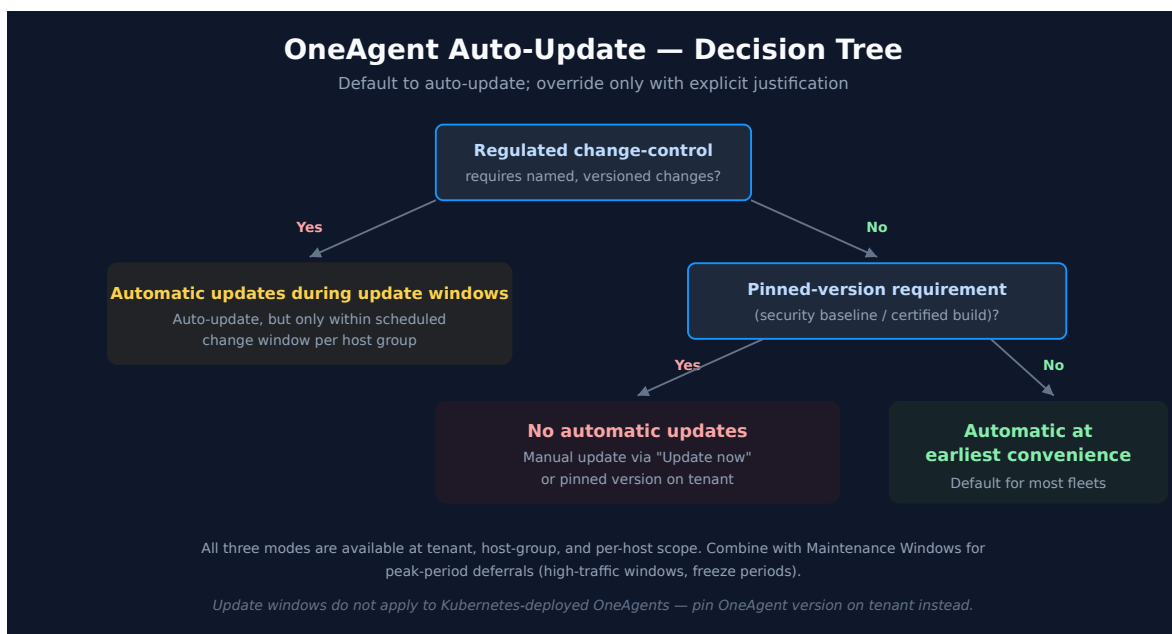

Trade-offs

Mode	Operator cost	Lag from latest	Notes
Automatic updates at earliest convenience	Lowest	Hours-to-days	Background — most fleets pick this and never revisit
Automatic updates during update windows	Low	Days-to-weeks (window-dependent)	Predictable; aligns with established maintenance cadences
No automatic updates	Highest	Until manually applied — potentially long	Every transition is a ticket; risks fleet drifting silently if not managed

The "No automatic updates" mode is often picked defensively at tenant standup ("we'll turn it on later") and then forgotten. If you adopt this mode, pair it with a recurring calendar reminder to evaluate available versions, or you will discover that the fleet is six months behind a year later.

Breaking (OneAgent 1.345): on hosts where auto-update *and* process auto-injection are both disabled, versioned directories are no longer cleaned up.

Verbatim: *"Due to security concerns, versioned directories will no longer be removed automatically on hosts where auto-updates and process auto-injection are disabled."*

This lands directly on the mode above. Previously, a host on **No automatic updates** still had old versioned directories reclaimed by a legacy migration mechanism; from 1.345 that mechanism is gone, so on hosts where auto-update **and** process auto-injection are both disabled, each retained version's directory persists until someone removes it. The cost is disk, and it accrues quietly on exactly the fleet this mode creates — long-lived hosts that update rarely and are rarely looked at. **If you run "No automatic updates" at any scale, add OneAgent installation-directory growth to what you monitor, and give the cleanup an owner.** OneAgent 1.345 began its **staged rollout on 08/25/2026**, and OneAgent fleets lag tenant version — check the version your hosts are actually on before assuming either behavior. The mode itself is unchanged and remains a legitimate choice; only its housekeeping side effect changed.

Sources: [OneAgent update \(DT docs\)](#) — "Automatic updates at earliest convenience", "Automatic updates during update windows", and "No automatic updates" are the three documented modes; "Update now" and environment-wide "Update now to target version" are the manual triggers when

auto-update is disabled, [OneAgent 1.345 release notes \(DT docs\)](#) — "*Removed legacy migration mechanism of versioned directories*", quoted above. **Derived:** the disk-growth consequence for long-lived manually-updated hosts follows from the removal applying precisely to hosts with auto-update disabled.

5. Update Windows vs Maintenance Windows

Two related-but-distinct mechanisms are easy to confuse:

Concept	What it does	Where to set
Update window	Defines <i>when</i> automatic OneAgent updates may execute. Only applies when the update mode is <code>Automatic updates during update windows</code> .	Latest Dynatrace: Settings → Fleet management → OneAgent version and updates → <i>Manage update windows</i> tab
Maintenance window	Suppresses <i>alerting</i> on monitored entities during the window. Does not govern OneAgent updates.	Settings → Maintenance windows

In community practice, the confusion goes both directions: teams set a Maintenance Window expecting it to delay OneAgent updates (it does not), or they set an Update Window expecting alerts to be suppressed during it (they are not). Maintenance windows govern alerting; update windows govern the update mechanic itself. They are independent tools and often used together.

A useful pairing: schedule update windows during your normal maintenance cadence, *and* create a maintenance window over the same period — so OneAgent updates happen quietly without generating "OneAgent restart detected" event noise downstream.

Recurrence patterns for update windows: one-time, daily (every N days), weekly (specific weekdays), monthly (specific day-of-month). Pick the pattern that matches your existing change calendar — there is no built-in advantage to weekly over monthly, just operational fit.

Sources: [OneAgent update \(DT docs\)](#) — "*OneAgent update windows are used to schedule automatic OneAgent updates when the Automatic updates during update windows option is selected.*",

[Maintenance windows \(DT docs\)](#) — maintenance windows suppress alerting; they do not delay or govern OneAgent updates.

6. Containerized OneAgent — The DynaKube Special Case

OneAgent in Kubernetes is managed by the Dynatrace Operator through a DynaKube custom resource. The update model here differs from host-based OneAgent in important ways:

- **Update windows do not apply to Kubernetes-deployed OneAgents.** The OneAgent update windows mechanic is host-based.
- **The DynaKube `autoUpdate` parameter is deprecated.** The DynaKube parameters reference now documents `autoUpdate` as *"Deprecated field to be removed in a future release. Pin the OneAgent version on your tenant to configure auto-update. Auto-update is disabled when the `version` or `image` fields are set."*
- **The supported pattern is to pin the OneAgent version on the tenant.** Setting `version` or `image` on the DynaKube CR explicitly opts out of auto-update for that workload.

In practice this means: for Kubernetes workloads, the policy choice is not "auto-update yes/no" at the DynaKube level — it is "pin a specific OneAgent version on the tenant, or leave it floating" Pinning the version on the tenant gives you a single, auditable artifact for what is deployed across all clusters using that DynaKube.

Decision	Mechanism on K8s
Auto-update OneAgent in cluster	Leave version / image unset on DynaKube; let the tenant default flow
Pin a specific OneAgent version	Pin on tenant, or set <code>version</code> / <code>image</code> on DynaKube (the older pattern)
Different version per cluster	Multiple DynaKube CRs, each with its own version pin

For deeper coverage of DynaKube modes (`classicFullStack` , `cloudNativeFullStack` , `applicationMonitoring` , `hostMonitoring`), see the **K8S** topic series. This FAQ stays at the update-policy level.

Sources: [DynaKube parameters for Dynatrace Operator \(DT docs\)](#) — *"Deprecated field to be removed in a future release. Pin the OneAgent version on your tenant to configure auto-update."*, [OneAgent update \(DT docs\)](#) — *"Update windows currently do not apply in Kubernetes environments."*.

7. Sequencing Relative to ActiveGate

When ActiveGates sit in the OneAgent → Dynatrace path (private ActiveGates for routing, or AGs in network-restricted environments):

Leave automatic updates on for both OneAgents and ActiveGates. Both are on by default, and with both left on there is no update order for you to manage.

If either tier is off automatic updates — disabled, pinned, or confined to update windows — then **update ActiveGates first, then OneAgents**. Dynatrace publishes no general version-compatibility rule between the two, but it has enforced this dependency once: ahead of OneAgent's move to 64-bit host IDs, *"all ActiveGates earlier than version 1.154 must be upgraded to newer releases in order to properly support OneAgent 64-bit IDs."* In community practice that case is generalised into a standing order. The combination to avoid is OneAgents on auto-update in front of ActiveGates that are not — and note that ActiveGate auto-update is the default only for new environments, so an older tenant may be in that state without anyone having chosen it.

If your tenant uses no private ActiveGates (OneAgents connect directly to Dynatrace SaaS), this sequencing concern doesn't apply — but most enterprise deployments include at least one AG tier for network reasons, so the rule effectively applies.

Updating OneAgents manually (after the ActiveGates are done):

- **One host.** Go to **Settings > Monitoring > Monitoring overview**, select the **Hosts** tab, select **Update** next to the host, then **Update now**. The button appears only for an outdated **full-stack** OneAgent — not for PaaS or standalone OneAgents — and a disabled **Update now** means you lack permission to download the installer.
- **A host group, or the whole environment.** On the host-group or environment **OneAgent updates** settings, **Update now to target version** updates every host of the selected OS and architecture, whatever its auto-update setting. Set the **Target version** first — it is also the version manual updates install.

- **Without the UI.** Download the installer, copy it to the host, and install there.
- **Then restart monitored processes.** Components of OneAgent run inside monitored processes (Java, .NET, Apache, IIS); those processes keep reporting on the old version until they restart.
- **Kubernetes** is different: update windows do not apply there, and OneAgent versions are driven through the Dynatrace Operator (§6).

See FAQ-05 §4 for the ActiveGate update steps, and FAQ-05: How to manage ActiveGate updates on Dynatrace SaaS for the full AG-side discussion, including HA pair rolling updates, role-specific considerations (synthetic, EF 2.0, cloud monitoring), and validation steps.

In community practice, mixed-version environments (AGs lagging behind OneAgents) tend to surface first as *"some hosts intermittently aren't reporting"* or *"this new feature didn't light up on these hosts"* — by then the diagnostic path is long. Keeping AGs on auto-update, or updating them first where they are manual, avoids the failure mode.

Sources: [OneAgent update \(DT docs\)](#) — *"The Update button appears only if the installed version of OneAgent on a specific host is outdated and if it is a full-stack OneAgent."*; *"Manually triggering Update now to target version will update all hosts running the selected OS and architecture combination, regardless of their automatic update status."*; [Update ActiveGate \(DT docs\)](#) — *"When a new version is available, the installation package is downloaded and installed automatically. This is the default setting for new environments; existing environments retain their current setting."*; [End-of-support announcements \(DT docs\)](#) — *"all ActiveGates earlier than version 1.154 must be upgraded to newer releases in order to properly support OneAgent 64-bit IDs."* Neither update page states an ActiveGate-before-OneAgent order; the standing rule is community practice generalised from the 1.154 case.

8. Validation After Update

For most fleets on `Automatic updates at earliest convenience`, post-update validation is implicit — the platform itself reports OneAgent health, version, and process injection status. The check usually doesn't need a separate workflow.

For change-controlled fleets, in community practice the validation set looks like the list below — no Dynatrace page enumerates it, so adapt it to your own change process:

1. **Version reported.** Confirm the OneAgent is reporting the target version (Deployment status page; or DQL: `fetch dt.entity.host | fields entity.name, osVersion, installerVersion`).
2. **Deep monitoring re-injected.** Process Groups and PGIs for the host show the new agent version. New process starts after the update inherit the new agent.
3. **Smartscape topology intact.** No unexpected gaps — services, processes, and hosts still link as before.
4. **No new ingestion errors.** Spans, logs, and metrics from the host continue to land; no spike in dropped events.
5. **Application functioning normally.** If a deep-injection-relevant change shipped (Java agent library swap, .NET profiler change), validate the apps themselves restart cleanly.

For fleets running `Automatic updates during update windows` , build this checklist into the post-window review so any anomalies get caught before the next window's batch.

Sources: [OneAgent update \(DT docs\)](#).

9. Rollback Considerations

Rollback of a OneAgent version is uncommon on SaaS, but it does happen — most often when a new version introduces an unexpected interaction with a specific runtime or framework on a specific host.

The operating reality:

- **Rollback = install older version.** There is no in-place downgrade — selecting an older target version does not downgrade an installed OneAgent. The flow is `uninstall current OneAgent → install older installer → confirm host re-registers on the older version` . In community practice the reinstalled host re-registers under its existing host entity — verify this on one host before relying on entity continuity.
- **Pinning the tenant to an older version stops the auto-update flow from reverting your rollback.** Without pinning, the host will auto-update back to current on its next cycle.
- **For Kubernetes**, pin the OneAgent version on the tenant (or set `version` / `image` on the DynaKube CR). The Operator will rotate the OneAgent pods to the pinned version.
- **Capture configuration before rollback.** Host group assignment, host tags, host properties — `oneagentctl --get-host-group` , `oneagentctl --get-host-tag` , etc. —

survive reinstall if you reapply on the new install. Document them first.

The playbook above is community practice built on the documented uninstall/reinstall mechanic, not a single documented procedure. In community practice, the right time to plan rollback is *before* enabling a broad rollout — pick a canary host group, validate there, then expand. Rollback as a routine response to a fleet-wide issue is expensive and rarely the best answer; rollback as a contained response within a canary is cheap.

Sources: [OneAgent update \(DT docs\)](#) — "If you select an older version than a currently deployed version, you won't be able to downgrade OneAgent.", [oneagentctl \(DT docs\)](#).

10. Common Pitfalls

Pitfall	Why it happens	What to do instead
"We'll disable auto-update for safety, then forget about it."	No automatic updates is set at standup as a precaution and never revisited. Fleet drifts months behind.	Pair No automatic updates with a recurring calendar reminder to evaluate available versions, or pick Automatic updates during update windows instead.
Maintenance window expected to delay an update.	Maintenance windows suppress alerts, not updates. Setting a maintenance window and expecting OneAgent to wait is a common confusion.	Use update windows for update timing; use maintenance windows for alert suppression. The two are independent.
Per-host overrides accumulating invisibly.	One-off per-host changes pile up; the host-group setting is no longer the effective policy across the group.	If multiple hosts in a group need different behavior, that's a signal the group should be split — not a signal to multiply per-host overrides.
DynaKube autoUpdate: false as the K8s pinning mechanism.	The DynaKube field is deprecated; many older blog posts still recommend it.	Pin the OneAgent version on the tenant instead, or set version / image on the DynaKube CR.

Pitfall	Why it happens	What to do instead
OneAgents on auto-update in front of ActiveGates on manual updates.	AG restarts feel riskier, so the AG tier gets frozen first — or an older tenant never had AG auto-update on.	Put the AGs on auto-update; where they must stay manual, update them before the OneAgents — see FAQ-05 §4.
No post-update validation discipline.	"It auto-updated, so it must be fine."	Spot-check version, deep monitoring re-injection, and topology integrity after any non-routine update. Most fleets need this only for major versions.
Treating OneAgent update like an OS patch.	OS patch programs assume "all hosts patched on Tuesday." OneAgent updates run on Dynatrace's release cadence, not your OS calendar.	Decouple OneAgent update policy from OS patch policy. Update windows can align the two if needed, but they are not the same process.

In community practice the remaining items below are observed often enough across fleets to be worth flagging; Dynatrace does not document them as anti-patterns, so weigh them against your own fleet.

Sources: [OneAgent update \(DT docs\)](#) — mechanics of the three update modes and the "Update now" controls., [DynaKube parameters \(DT docs\)](#) — the parameter table marks it "(deprecated)" — "Deprecated field to be removed in a future release. Pin the OneAgent version on your tenant to configure auto-update.".

11. Recommended Approach

For most SaaS tenants, the right configuration is:

- Tenant default:** **Automatic updates at earliest convenience** . Lowest operator cost; fleet stays current automatically.
- Host-group overrides for production:** **Automatic updates during update windows** if your change-control culture wants predictable timing. Pair with a recurring update window (e.g., Sunday 02:00–04:00 local).

3. **Host-group override for regulated tiers (PCI, FedRAMP equivalent, etc.):** `No automatic updates` with a documented quarterly version-evaluation cadence. Pin the version on the tenant or via DynaKube `version / image` for K8s workloads.
4. **Per-host overrides only in exceptional cases** — and only when you've documented why elsewhere (DECISIONS.md, change ticket, host-group naming convention).
5. **Keep ActiveGates on automatic updates too; where they are manual, update them before OneAgents.** See FAQ-05.
6. **Validate version, deep injection, and topology after major-version updates.**
Routine minor updates rarely need this.
7. **Plan rollback within canary scope, not fleet-wide.** Pick a canary host group, validate, expand.

For Kubernetes-only tenants, the recommended pattern is:

1. **Leave DynaKube** `version / image` **unset** unless you have a reason to pin.
2. **Pin OneAgent version on the tenant** when you need a controlled rollout cadence.
3. **Treat** `autoUpdate` **on DynaKube as deprecated** — don't author new DynaKube CRs that rely on it.

Summary

OneAgent update management on SaaS is a four-axis decision: mode (auto / windowed / off), scope (tenant / host group / host), Kubernetes special case (version pin on tenant), and sequencing (a non-issue with both tiers on auto-update; after ActiveGates where either is manual). The default `Automatic updates at earliest convenience` is the right answer for most fleets; the few cases where it isn't are change-controlled production, regulated tiers, and explicit canary patterns. The most common failure is choosing `No automatic updates` defensively at standup and letting the fleet drift — pair it with a calendar mechanism, or pick `Automatic updates during update windows` instead.

Next Steps

- Review your current tenant-level OneAgent update setting and confirm it is intentional (not a leftover from standup).
- Audit per-host-group overrides; collapse any that have drifted into "per-host overrides everywhere" patterns.

- For Kubernetes workloads, migrate away from DynaKube `autoUpdate` toward tenant-level version pinning.
 - Read **FAQ-05** for the ActiveGate side of the same problem, and check that your ActiveGates are on auto-update too.
 - Document your update policy alongside your host-group naming convention (see **FAQ-01**) and tagging strategy (see **FAQ-02**).
-

This notebook was AI-generated from community-submitted and publicly available sources. This notebook series is not officially supported by Dynatrace. Always verify information against official [Dynatrace documentation](#).