

Nama: Dwi Aprina Simarmata
NIM: 12030123120065


Catatan Pertemuan 6

Nama: Dwi Aprina Simarmata
NIM: 12030123120065

Presentasi

Langkah-langkah:

1. Perintahkan ChatGPT : buat aplikasi inventory management system dengan menggunakan kode html, css, js, php, sql. Gunakan kode front-end memakai index.html, style.css, script.js. (Lengkapi dengan penjelasan struktur kode yang sesuai dengan struktur folder, serta tutorial penggunaannya). Tambahkan juga dengan contoh inventory yang dari google

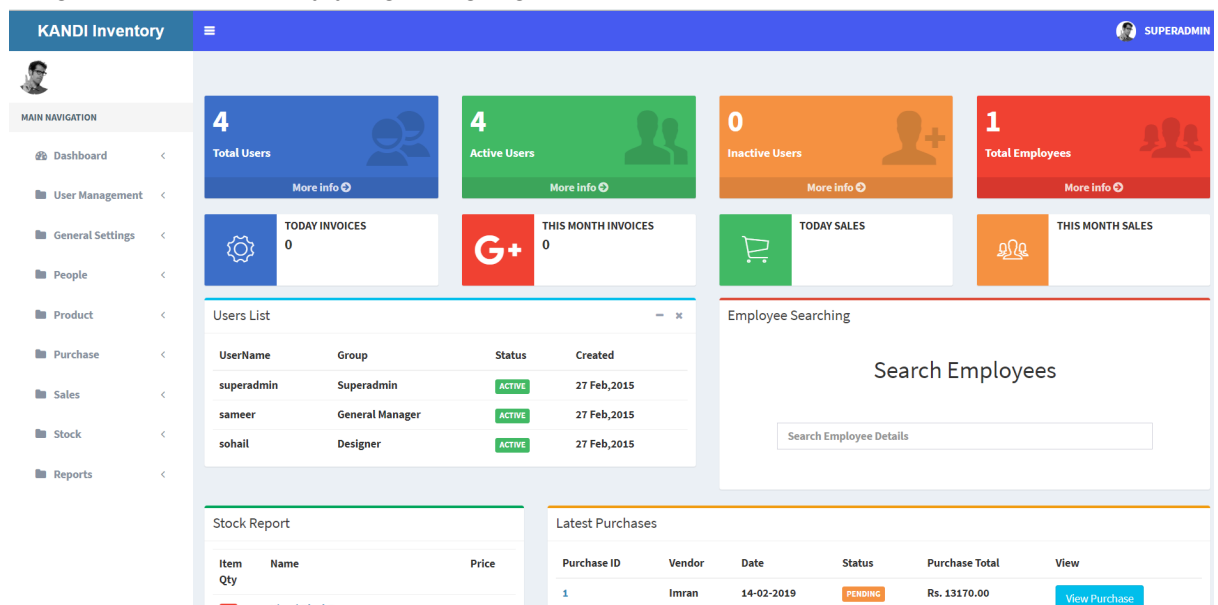

Hasilnya sebagai berikut:

Struktur Folder

pgsql

CopyEdit

inventory-system/

— index.html	(Halaman utama/front-end)
— style.css	(File CSS untuk tampilan)
— script.js	(File JavaScript untuk interaksi)
— config.php	(Konfigurasi database)
— db.sql	(Struktur database)
— add_product.php	(Tambah produk)
— delete_product.php	(Hapus produk)
— update_product.php	(Update produk)

- |— list_products.php (Tampilkan produk)
- |— assets/ (Folder untuk gambar, ikon, dll.)
- |— api/ (Folder untuk API PHP)

1 Front-End (HTML, CSS, JS)

index.html (Tampilan utama)

html

CopyEdit

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width,
initial-scale=1.0">
  <title>Inventory Management</title>
  <link rel="stylesheet" href="style.css">
</head>
<body>

  <h1>Inventory Management System</h1>
  <div class="container">
    <form id="addProductForm">
      <input type="text" id="productName" placeholder="Product
Name" required>
      <input type="number" id="productQty"
placeholder="Quantity" required>
      <input type="number" id="productPrice"
placeholder="Price" required>
      <button type="submit">Add Product</button>
    </form>

    <h2>Product List</h2>
    <table id="productTable">
      <tr>
        <th>ID</th>
        <th>Name</th>
        <th>Quantity</th>
        <th>Price</th>
```

```
        <th>Action</th>
    </tr>
</table>
</div>

<script src="script.js"></script>
</body>
</html>
```

style.css (Tampilan UI)

css

CopyEdit

```
body {
    font-family: Arial, sans-serif;
    text-align: center;
    background-color: #f4f4f4;
}

.container {
    width: 60%;
    margin: auto;
    background: white;
    padding: 20px;
    box-shadow: 0px 0px 10px gray;
}

input {
    padding: 10px;
    margin: 5px;
    width: 80%;
}

button {
    padding: 10px;
    background: blue;
    color: white;
    border: none;
    cursor: pointer;
}
```

```

table {
  width: 100%;
  border-collapse: collapse;
  margin-top: 20px;
}

th, td {
  border: 1px solid black;
  padding: 10px;
}

th {
  background: lightgray;
}

```

script.js (Interaksi)

js

CopyEdit

```

document.getElementById("addProductForm").addEventListener("submit",
function(e) {
  e.preventDefault();

  let name = document.getElementById("productName").value;
  let qty = document.getElementById("productQty").value;
  let price = document.getElementById("productPrice").value;

  fetch('add_product.php', {
    method: 'POST',
    headers: { 'Content-Type':
'application/x-www-form-urlencoded' },
    body: `name=${name}&qty=${qty}&price=${price}`
  }).then(response => response.json())
  .then(data => {
    alert(data.message);
    loadProducts();
  });
});

function loadProducts() {
  fetch('list_products.php')

```

```

        .then(response => response.json())
        .then(data => {
            let table = document.getElementById("productTable");
            table.innerHTML =
`<tr><th>ID</th><th>Name</th><th>Quantity</th><th>Price</th><th>Acti
on</th></tr>`;

            data.forEach(product => {
                let row = `<tr>
                    <td>${product.id}</td>
                    <td>${product.name}</td>
                    <td>${product.qty}</td>
                    <td>${product.price}</td>
                    <td><button
onclick="deleteProduct(${product.id})">Delete</button></td>
                </tr>`;
                table.innerHTML += row;
            });
        });
    });
}

function deleteProduct(id) {
    fetch(`delete_product.php?id=${id}`)
        .then(response => response.json())
        .then(data => {
            alert(data.message);
            loadProducts();
        });
}

window.onload = loadProducts;

```

2 Back-End (PHP & MySQL)

config.php (Koneksi Database)

```

php
CopyEdit
<?php
$host = "localhost";

```

```
$user = "root";
$password = "";
$dbname = "inventory_db";

$conn = new mysqli($host, $user, $password, $dbname);

if ($conn->connect_error) {
    die("Connection failed: " . $conn->connect_error);
}
?>
```

db.sql (Struktur Database)

sql

CopyEdit

```
CREATE DATABASE inventory_db;

USE inventory_db;

CREATE TABLE products (
    id INT AUTO_INCREMENT PRIMARY KEY,
    name VARCHAR(100) NOT NULL,
    qty INT NOT NULL,
    price DECIMAL(10,2) NOT NULL
);
```

add_product.php (Tambah Produk)

php

CopyEdit

```
<?php
include 'config.php';

if ($_SERVER["REQUEST_METHOD"] == "POST") {
    $name = $_POST["name"];
    $qty = $_POST["qty"];
    $price = $_POST["price"];

    $stmt = $conn->prepare("INSERT INTO products (name, qty, price)
VALUES (?, ?, ?)");
```

```
$stmt->bind_param("sii", $name, $qty, $price);

if ($stmt->execute()) {
    echo json_encode(["message" => "Product added
successfully"]);
} else {
    echo json_encode(["message" => "Failed to add product"]);
}
?>
```

list_products.php (Tampilkan Produk)

php

CopyEdit

```
<?php
```

```
include 'config.php';
```

```
$result = $conn->query("SELECT * FROM products");
```

```
$products = [];
```

```
while ($row = $result->fetch_assoc()) {
```

```
    $products[] = $row;
```

```
}
```

```
echo json_encode($products);
```

```
?>
```

delete_product.php (Hapus Produk)

php

CopyEdit

```
<?php
```

```
include 'config.php';
```


```
$id = $_GET["id"];
```

```
$conn->query("DELETE FROM products WHERE id=$id");
```

```
echo json_encode(["message" => "Product deleted successfully"]);
```

?>


3. Salin ke VSCode

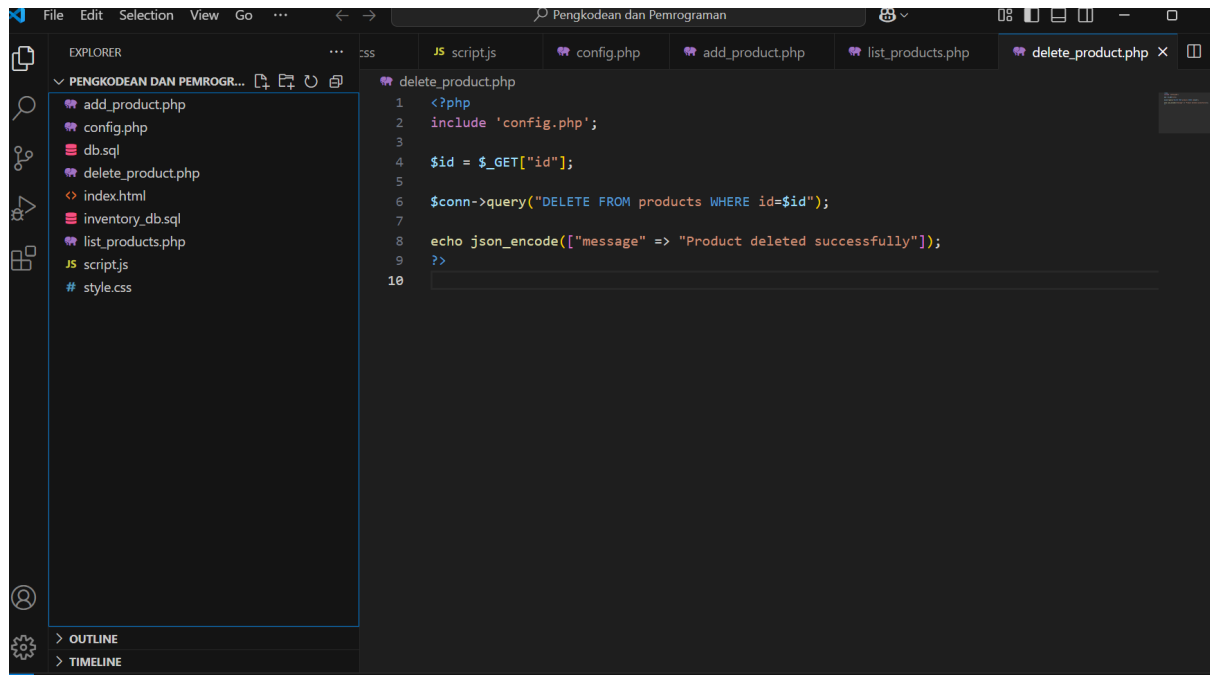

The screenshot shows the VS Code editor interface. The Explorer sidebar on the left displays a project named 'PENGKODEAN DAN PEMROGRAMAN' with the following files: add_product.php, config.php, db.sql, delete_product.php, index.html, inventory_db.sql, list_products.php, script.js, and style.css. The main editor area shows the content of 'delete_product.php' with the following PHP code:

```
1 <?php
2 include 'config.php';
3
4 $id = $_GET["id"];
5
6 $conn->query("DELETE FROM products WHERE id=$id");
7
8 echo json_encode(["message" => "Product deleted successfully"]);
9 ?>
10
```

4. Lalu Save ke Folder. Saya membuat nama foldernya dengan nama “koding-dwi”

Last month				
 delete_product	20/03/2025 10:47	PHP Source File	1 KB	
 list_products	20/03/2025 10:46	PHP Source File	1 KB	
 add_product	20/03/2025 10:46	PHP Source File	1 KB	
 db	20/03/2025 10:45	SQL File	1 KB	
 config	20/03/2025 10:44	PHP Source File	1 KB	
 script.js	20/03/2025 10:43	JSFile	2 KB	
 style	20/03/2025 10:43	CSS Source File	1 KB	
 index	20/03/2025 10:42	Chrome HTML Docu...	2 KB	
 inventory_db	20/03/2025 10:34	SQL File	6 KB	

5. Cari localhost/koding-dwi di halaman google. Dan akan muncul tampilan sebagai berikut

Inventory Management System

Form input fields:
Name: Komputer
Quantity: 6
Price: 2000000
Add Product

Product List

ID	Name	Quantity	Price	Action
1	Laptop ASUS	undefined	7500000.00	Delete
2	Printer Epson	undefined	2500000.00	Delete
3	Meja Kerja	undefined	500000.00	Delete

Nah , apabila ingin menambahkan bisa menambahkan dari sini, lalu lihat di PhpMyAdmin apakah product list ikut bertambah.