


TUTORIAL INSTALL SOURCE CODE LARAVEL DI HOSTING

1. Domain

Atur domain, setup supaya hit folder public dalam laravel. Contoh seperti yang ditandai Digambar di bawah.

Note : anda dapat cek dalam folder Laravel disitu ada folder public

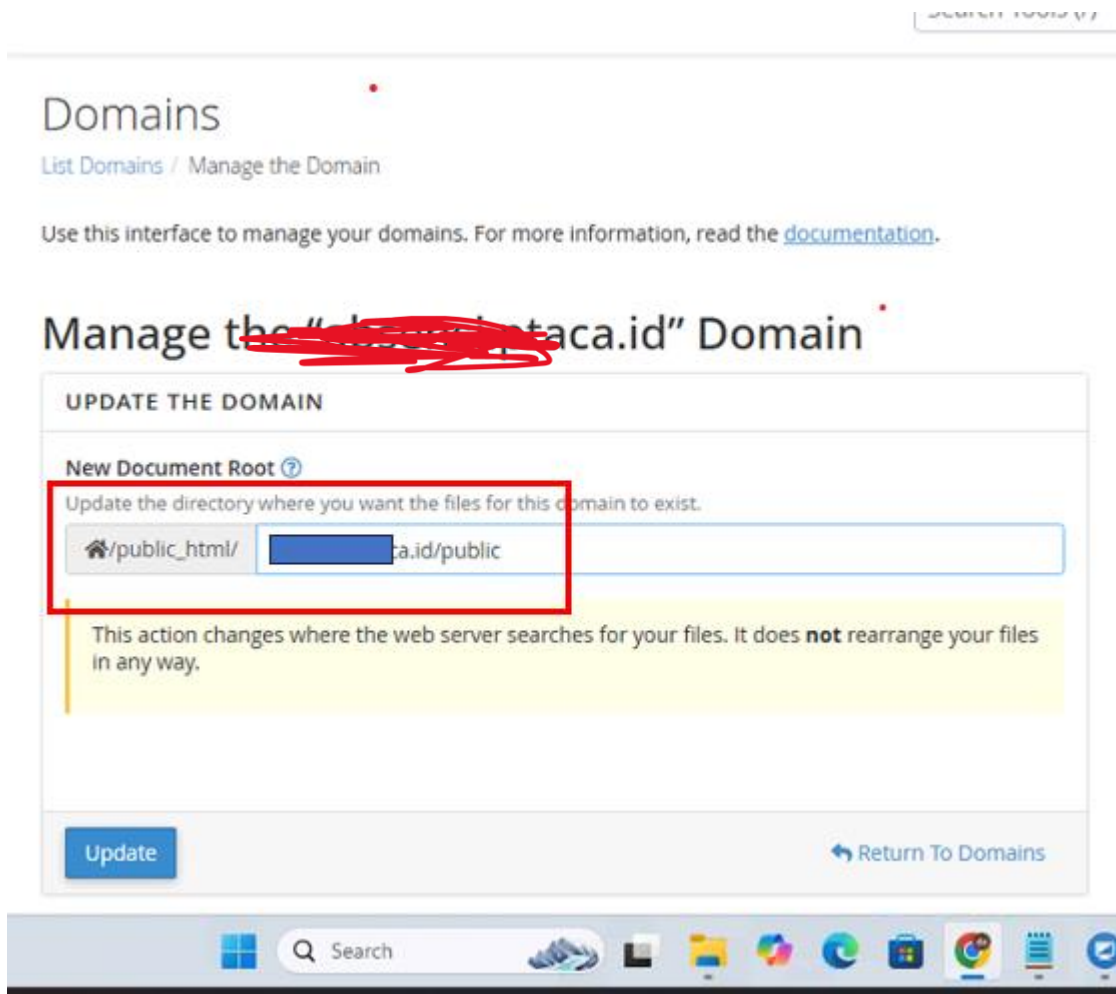

2. PHP

Setting PHP, pastikan menggunakan php 8.1

multiphp

PHP Selector

ExtensionsOptions

PHP Extensions

Reset to default

Current PHP version

8.1

Apply

A

☐ amqp
☐ apcu
☒ bcmath
☐ brotli

I

☒ igbinary
☐ imagick
☒ imap
☐ inotify
☐ intl

P

☐ pdf
☒ pdo
☐ pdo_dblib
☐ pdo_firebird
☒ pdo_mysql

S

☐ solr
☐ sourceguardian
☒ spl
☒ sqlite3
☐ ssl

3. Database

Setup juga database nya

Search Tools (/)

Manage My Databases

Manage large amounts of information over the web easily. Databases are necessary to run many web-based applications, such as bulletin boards, content management systems, and online shopping carts. For more information, read the [documentation](#).

[Jump to Database Users](#)

Create New Database

New Database:

Create Database

Modify Databases

Check Database


76_absensi

Check Database

76_absensi

Repair Database


Masukan db dalam env

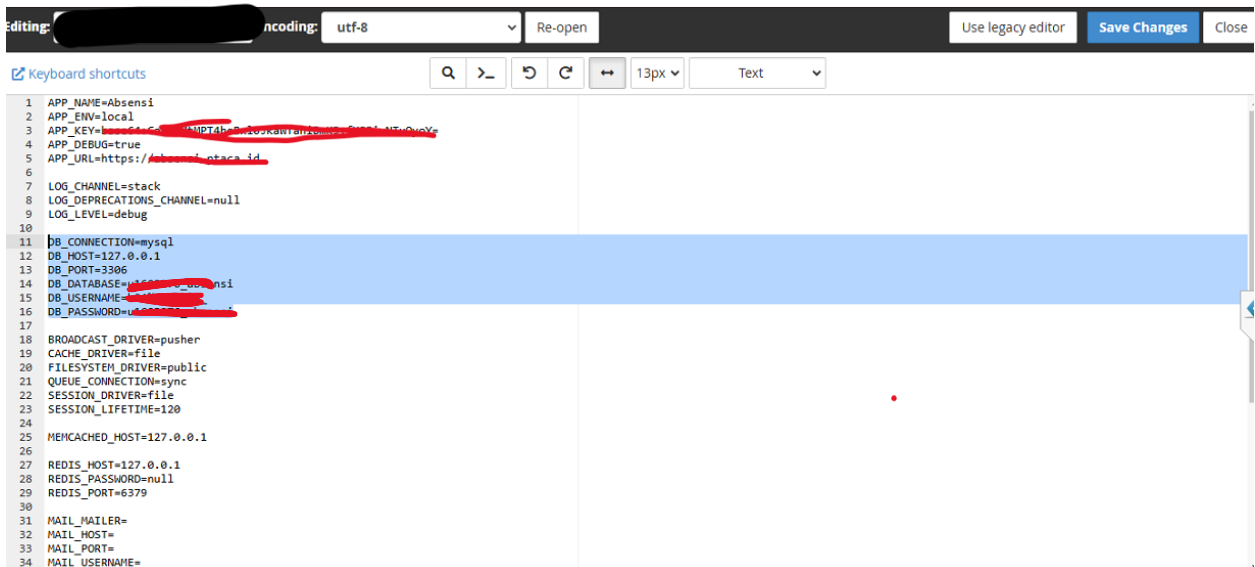

```
1 APP_NAME=Absensi
2 APP_ENV=local
3 APP_KEY=base64_encode(serialize(new \Illuminate\Foundation\Http\Middleware\TrimQueryStrings))
4 APP_DEBUG=true
5 APP_URL=https://absensi-ptaca.id
6
7 LOG_CHANNEL=stack
8 LOG_DEPRECATIONS_CHANNEL=null
9 LOG_LEVEL=debug
10
11 DB_CONNECTION=mysql
12 DB_HOST=127.0.0.1
13 DB_PORT=3306
14 DB_DATABASE=absensi
15 DB_USERNAME=root
16 DB_PASSWORD=
17
18 BROADCAST_DRIVER=pusher
19 CACHE_DRIVER=file
20 FILESYSTEM_DRIVER=public
21 QUEUE_CONNECTION=sync
22 SESSION_DRIVER=file
23 SESSION_LIFETIME=120
24
25 MEMCACHED_HOST=127.0.0.1
26
27 REDIS_HOST=127.0.0.1
28 REDIS_PASSWORD=null
29 REDIS_PORT=6379
30
31 MAIL_MAILER=
32 MAIL_HOST=
33 MAIL_PORT=
34 MAIL_USERNAME=
```

4. Buka domain d browser

Apabila tampilannya sudah seperti ini itu artinya setting server sudah berhasil. Lanjut untuk instalasi paket Laravel 8 nya

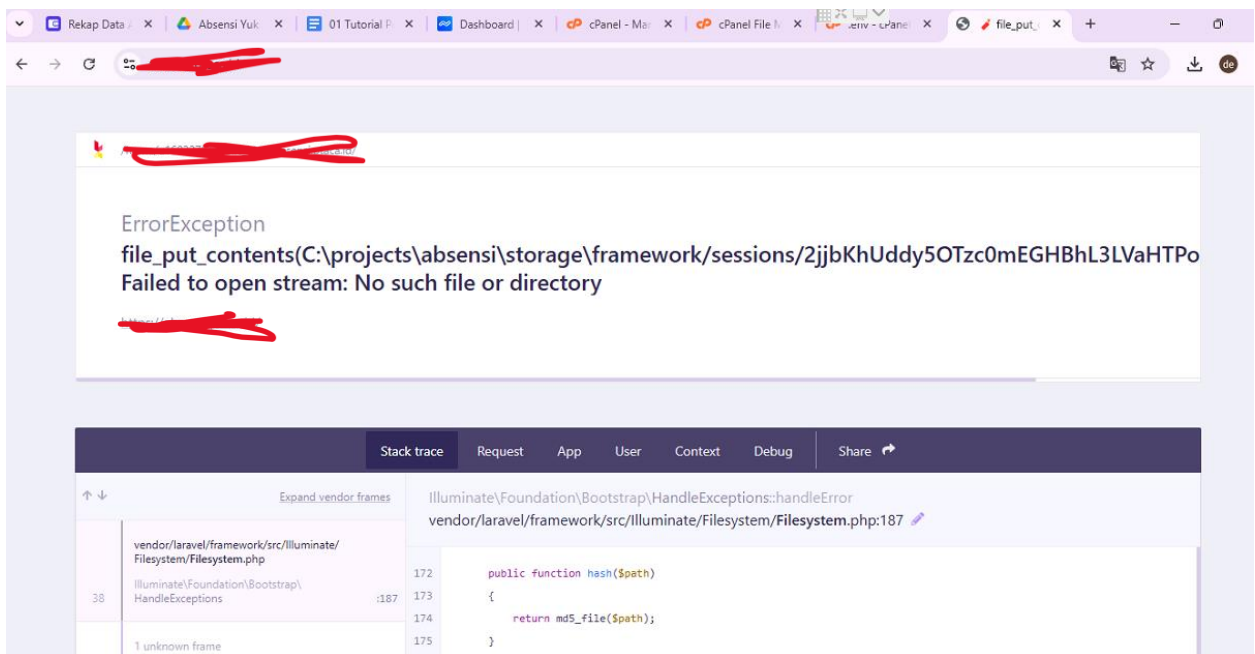

5. Buka Terminal dan ikuti Langkah berikut

This interface provides command line access to your account on the server.

```
[...@... id]$ composer -v

Composer version 2.6.5 2023-10-06 10:11:52

Usage:
  command [options] [arguments]

Options:
  -h, --help                Display help for the given command. When no command is given display help for the
  list command
  -q, --quiet                Do not output any message
  -V, --version              Display this application version
  --ansi|--no-ansi          Force (or disable --no-ansi) ANSI output
  -n, --no-interaction       Do not ask any interactive question
  --profile                  Display timing and memory usage information
  --no-plugins               Whether to disable plugins.
  --no-scripts               Skips the execution of all scripts defined in composer.json file.
  -d, --working-dir=WORRING-DIR If specified, use the given directory as working directory.
  --no-cache                 Prevent use of the cache
```

Arahkan ke folder root Laravel 8 yang mau di install.

Contoh :

cd absensi

Pastikan composer sudah terinstall

Apabila belum ketik **composer install**

- Ketik **php artisan optimize**

```
[...@... id]$ php artisan optimize
Configuration cache cleared!
Configuration cached successfully!
Route cache cleared!
Routes cached successfully!
Files cached successfully!
```

- Ketik **php artisan config:cache**

```
[...@... id]$ php artisan config:cache
Configuration cache cleared!
Configuration cached successfully!
[...@... id]$
```

- Ketik **php artisan route:clear**

```

Configuration cache: successfully.
$ php artisan route:clear
Route cache cleared!
.id]$

```

- Ketik `php artisan migrate:fresh --seed`

🔔
👤


This interface provides command line access to your account on the server.

```

php artisan migrate:fresh --seed

Dropped all tables successfully.
Migration table created successfully.
Migrating: 2014_10_12_000000_create_users_table
Migrated: 2014_10_12_000000_create_users_table (4.04ms)
Migrating: 2014_10_12_100000_create_password_resets_table
Migrated: 2014_10_12_100000_create_password_resets_table (16.28ms)
Migrating: 2019_08_19_000000_create_failed_jobs_table
Migrated: 2019_08_19_000000_create_failed_jobs_table (7.59ms)
Migrating: 2019_12_14_000001_create_personal_access_tokens_table
Migrated: 2019_12_14_000001_create_personal_access_tokens_table (9.13ms)
Migrating: 2022_09_16_095447_create_shifts_table
Migrated: 2022_09_16_095447_create_shifts_table (12.43ms)
Migrating: 2022_09_19_032649_create_mapping_shifts_table
Migrated: 2022_09_19_032649_create_mapping_shifts_table (23.74ms)
Migrating: 2022_09_20_074944_create lemburs_table
Migrated: 2022_09_20_074944_create lemburs_table (8.23ms)
Migrating: 2022_09_20_092230_create_cutis_table
Migrated: 2022_09_20_092230_create_cutis_table (3.25ms)
Migrating: 2022_10_31_083510_create_lokasis_table
Migrated: 2022_10_31_083510_create_lokasis_table (7.98ms)
Migrating: 2022_11_02_061554_create_reset_cutis_table
Migrated: 2022_11_02_061554_create_reset_cutis_table (2.70ms)
Migrating: 2022_12_01_041742_create_sips_table

```

 122.0.20
 [Home](#)
[Trademarks](#)
[Privacy Policy](#)
[Documentation](#)
[Give Feedback](#)

- Ketik `php artisan storage:link`

```

$ php artisan storage:link
The [/home/u1603276/public_html/absensi.ptaca.id/public/storage] link has been connected to [/home/u1603276/public_html/absensi.ptaca.id/storage/app/public].
The links have been created.

```

Berhasil

A screenshot of a web browser showing a login page. The browser's address bar is redacted with a black box. The page has a white background with a blue header. The main content area is titled "Log In" in bold black text. Below the title are two input fields: "Username" and "Password". The "Password" field has a toggle icon (an eye) to its right. Below these fields is a checkbox labeled "Remember Me". A large blue button with the text "Log In" is centered below the form. Below the button, there is a link that says "Don't have an Account? Sign up". Further down, there is a section titled "Face Recognition" and a button labeled "Absen Masuk". The browser's taskbar at the bottom shows various icons and the system clock indicating 11:39 PM on 10/25/2024.

Log In

Username

Password

☐ Remember Me

Log In

Don't have an Account? [Sign up](#)

Face Recognition

Absen Masuk

Daftar Pusher

A screenshot of the Pusher dashboard. The browser's address bar shows "dashboard.pusher.com". The page has a white background with a blue header. The main content area is titled "Welcome to Pusher" in large, bold black text. Below the title is a subtitle "Choose a product below and get started". There are two main product cards: "Channels" and "Beams". The "Channels" card has a purple icon and a "SANDBOX PLAN" badge. It contains the text "The platform for building scalable realtime features into your apps." and a blue "Get started" button, which is circled in red. The "Beams" card has a green icon and contains the text "The cross-platform API for native programmatic push notifications." and a blue "Get started" button. At the bottom of the page, there is a footer with "Support | Status" and a copyright notice "Copyright © 2024 Pusher Ltd. All rights reserved.". The browser's taskbar at the bottom shows various icons and the system clock indicating 11:41 PM on 10/25/2024.

Welcome to Pusher

Choose a product below and get started

Channels SANDBOX PLAN

The platform for building scalable realtime features into your apps.

Get started

Beams


The cross-platform API for native programmatic push notifications.

Get started


Support | Status

Copyright © 2024 Pusher Ltd. All rights reserved.

Create Channel

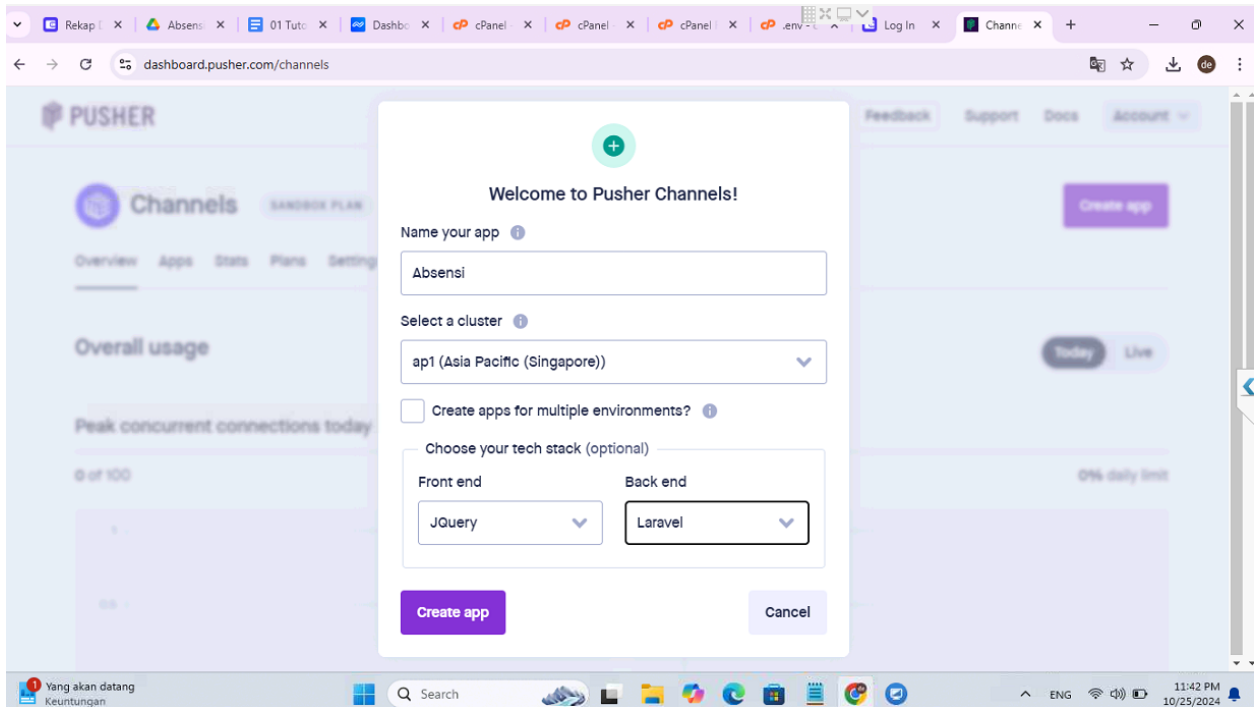


App keys

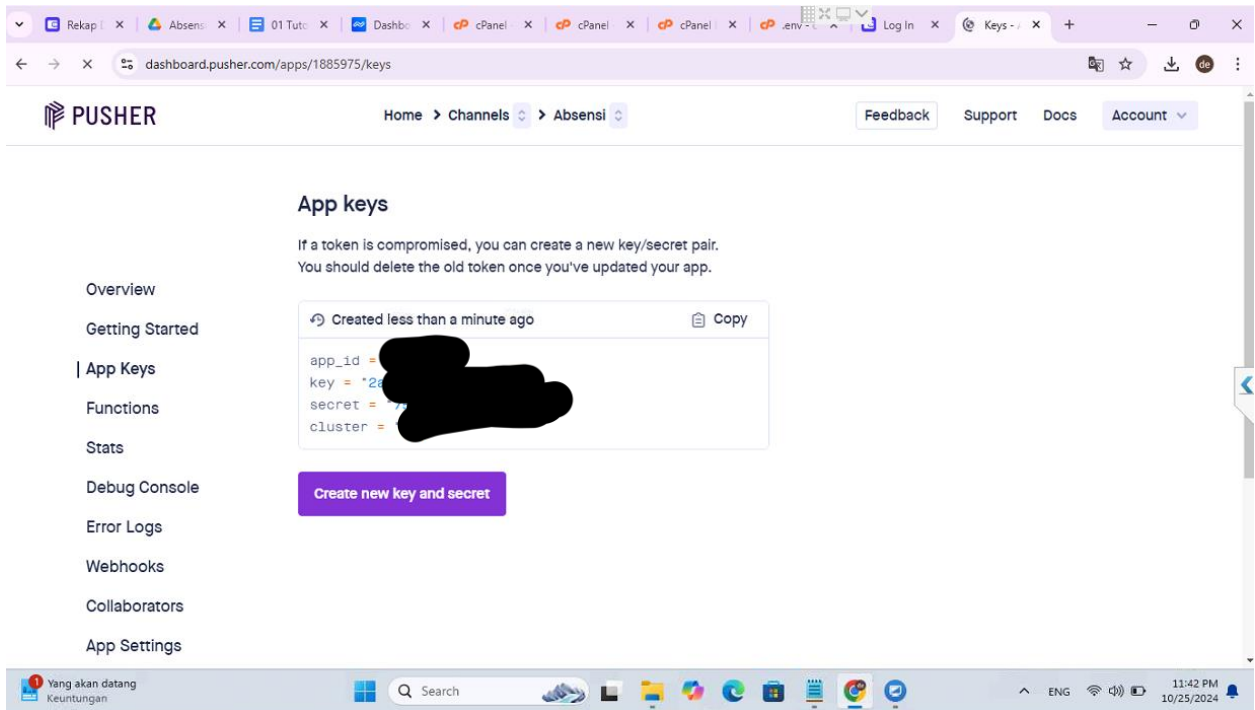

Masukan semua variable pusher ke dalam kode dibawah ini dalam file .env

```
45
46 PUSHER_APP_ID=1885975
47 PUSHER_APP_KEY=2a03da519c34adae6b9b
48 PUSHER_APP_SECRET=75f4280c9bd1f33f2adb
49 PUSHER_APP_CLUSTER=ap1
50
```

Masukan juga ke dalam file public/js/app.js line 2097

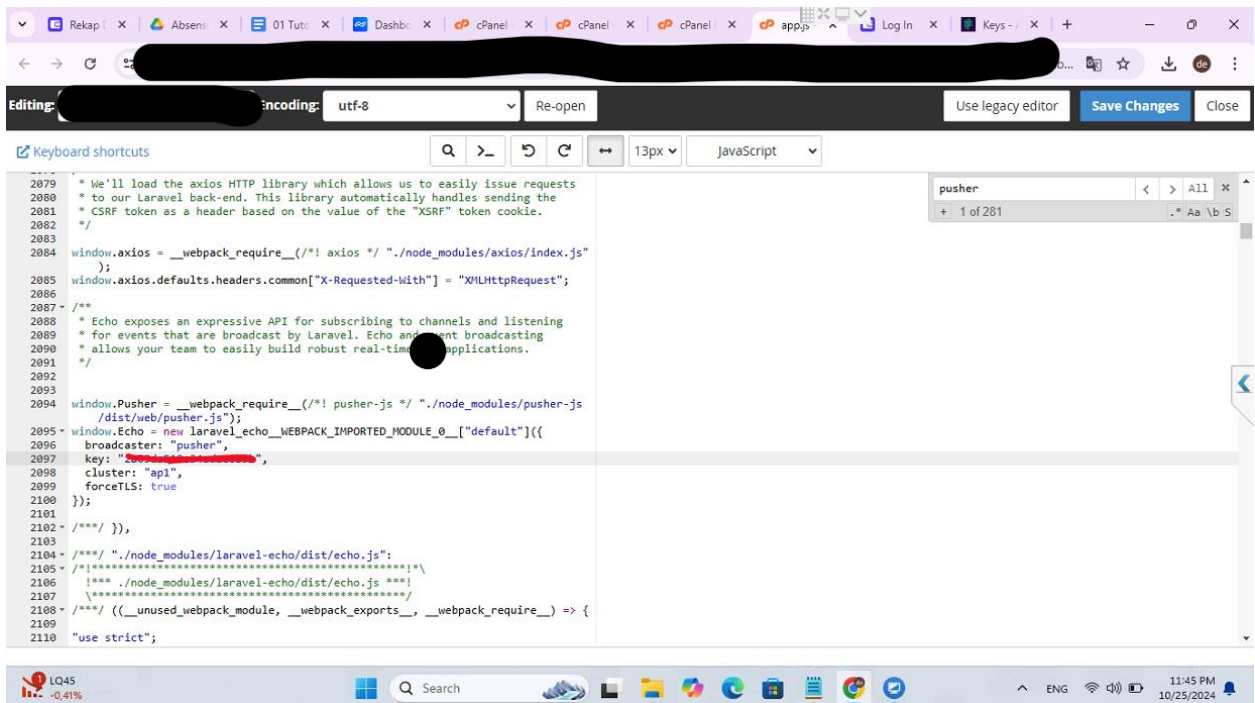

```
2079 * We'll load the axios HTTP library which allows us to easily issue requests
2080 * to our Laravel back-end. This library automatically handles sending the
2081 * CSRF token as a header based on the value of the "XSRF" token cookie.
2082 */
2083
2084 window.axios = __webpack_require__(/*! axios */ "./node_modules/axios/index.js"
2085 );
2086 window.axios.defaults.headers.common["X-Requested-With"] = "XMLHttpRequest";
2087
2088 /**
2089 * Echo exposes an expressive API for subscribing to channels and listening
2090 * for events that are broadcast by Laravel. Echo and event broadcasting
2091 * allows your team to easily build robust real-time applications.
2092 */
2093
2094 window.Pusher = __webpack_require__(/*! pusher-js */ "./node_modules/pusher-js
2095 /dist/web/pusher.js");
2096 window.Echo = new laravel_echo__WEBPACK_IMPORTED_MODULE_0__["default"]({
2097   broadcaster: "pusher",
2098   key: "2a03da519c34adae6b9b",
2099   cluster: "ap1",
2100   forceTLS: true
2101 });
2102
2103 /**
2104 * ./node_modules/laravel-echo/dist/echo.js:
2105 *
2106 * ./node_modules/laravel-echo/dist/echo.js
2107 *
2108 *
2109 *
2110 */
2111 ((__unused_webpack_module, __webpack_exports__, __webpack_require__) => {
2112   "use strict";
```