



**Universidad Autónoma de Nuevo León**

**Escuela Industrial y Preparatoria Técnica  
Álvaro Obregón**


**Materia : Base de datos con paginas web  
Dinamicas**

**Grupo 5L2**

**Actividad : Dimension 3**

**2152761 LEAL TRIANA DANIEL**

Empezamos con la insercion de datos mediante codigo php escribiendo el  
de la pagina 68

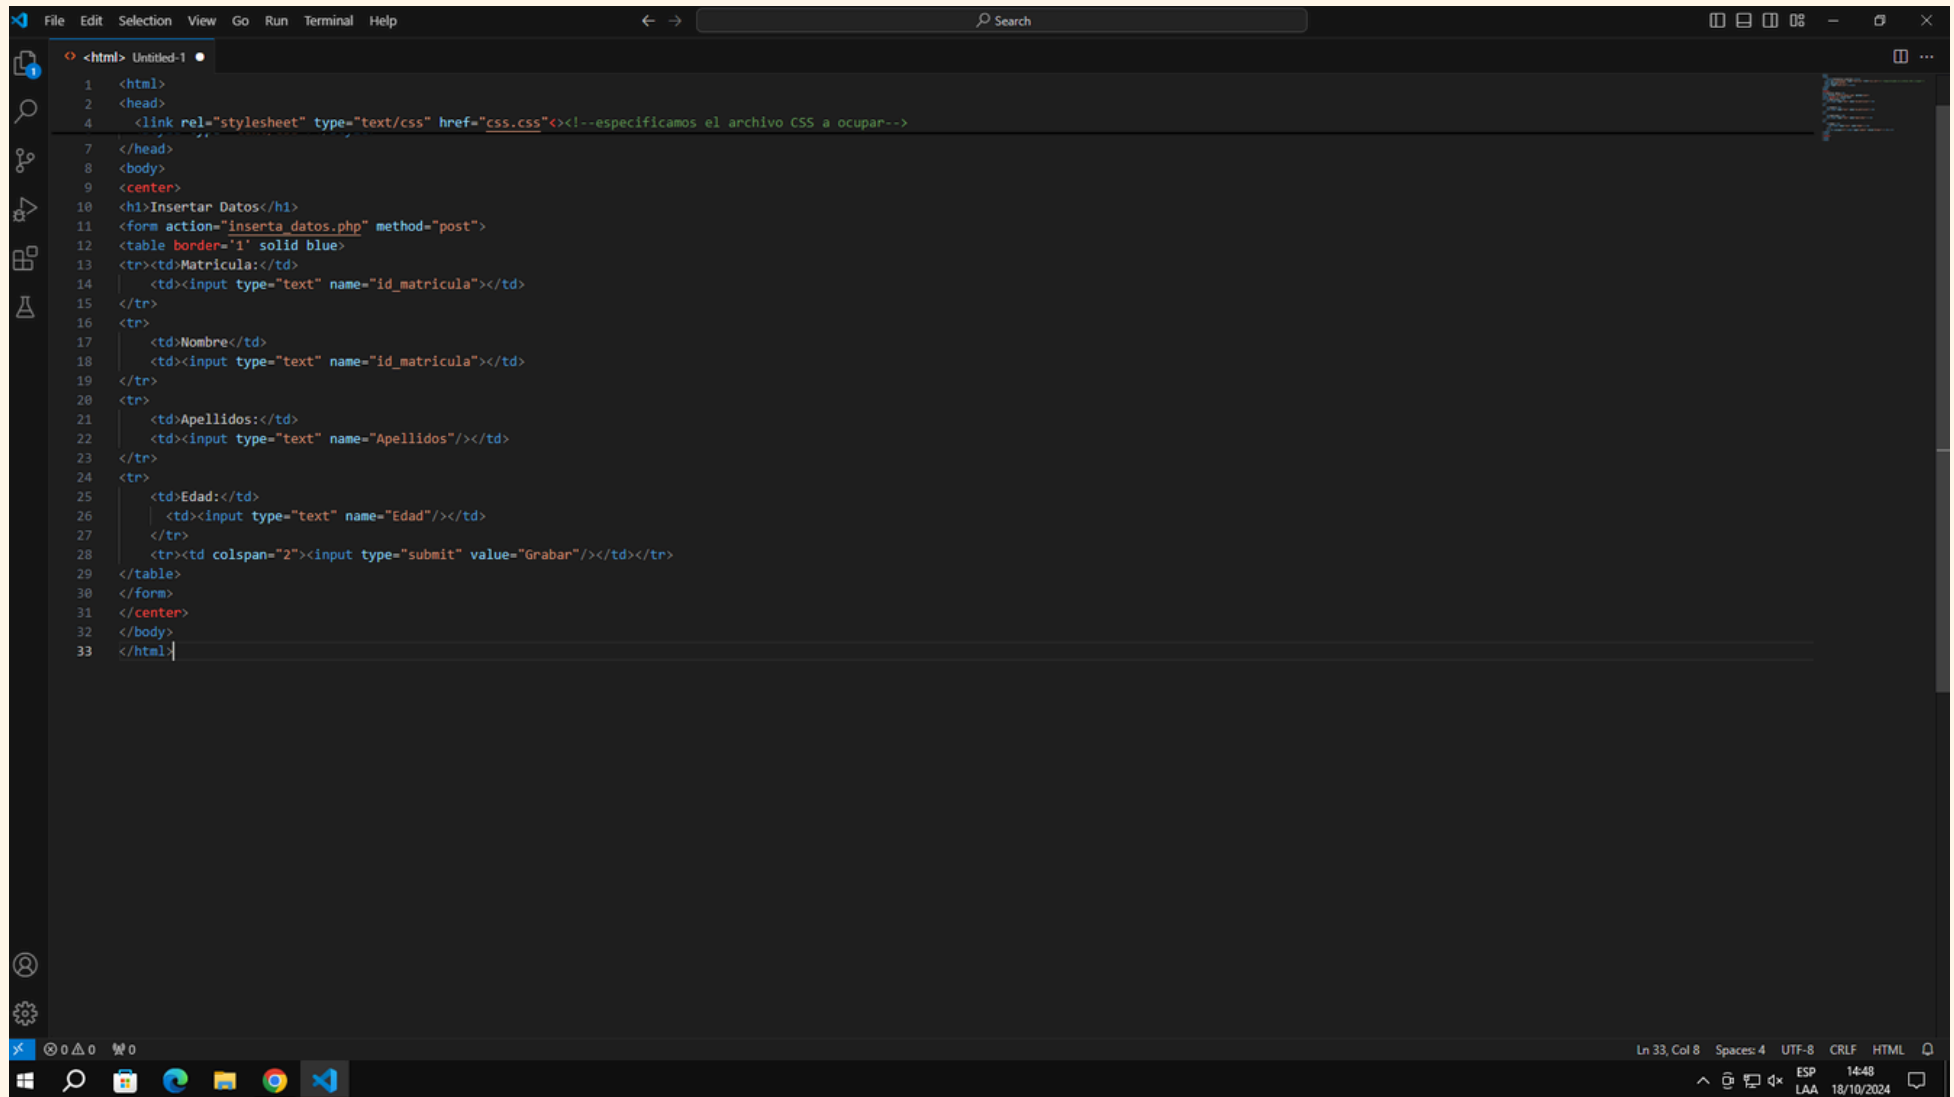

The image shows a code editor window with a dark theme. The editor contains an HTML document titled 'Untitled-1'. The code is as follows:


```
<html>
<head>
<link rel="stylesheet" type="text/css" href="css.css"><!--especificamos el archivo CSS a ocupar-->
</head>
<body>
<center>
<h1>Insertar Datos</h1>
<form action="inserta_datos.php" method="post">
<table border="1" solid blue>
<tr><td>Matricula:</td>
<td><input type="text" name="id_matricula"></td>
</tr>
<tr>
<td>Nombre:</td>
<td><input type="text" name="id_matricula"></td>
</tr>
<tr>
<td>Apellidos:</td>
<td><input type="text" name="Apellidos"/></td>
</tr>
<tr>
<td>Edad:</td>
<td><input type="text" name="Edad"/></td>
</tr>
<tr><td colspan="2"><input type="submit" value="Grabar"/></td></tr>
</table>
</form>
</center>
</body>
</html>
```

The code defines an HTML form with a blue border. It contains four text input fields for 'Matricula', 'Nombre', 'Apellidos', and 'Edad', and a submit button labeled 'Grabar'. The form's action is 'inserta\_datos.php' and its method is 'post'. A comment in the head section indicates that the 'css.css' file is used for styling.


Ln 33, Col 8 Spaces: 4 UTF-8 CRLF HTML

ESP 14:48  
LAA 18/10/2024

# Guardar como:Inserta\_Datos.html

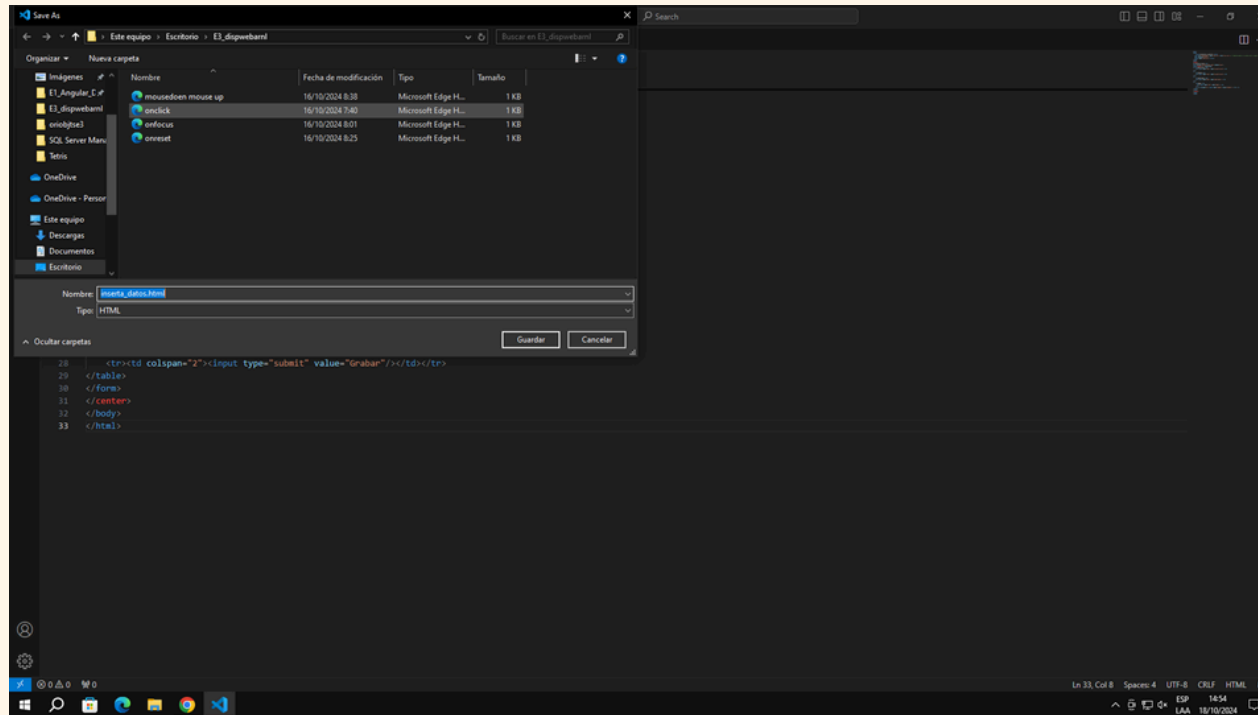

ponemos el codigo de la conexion con el servidor php

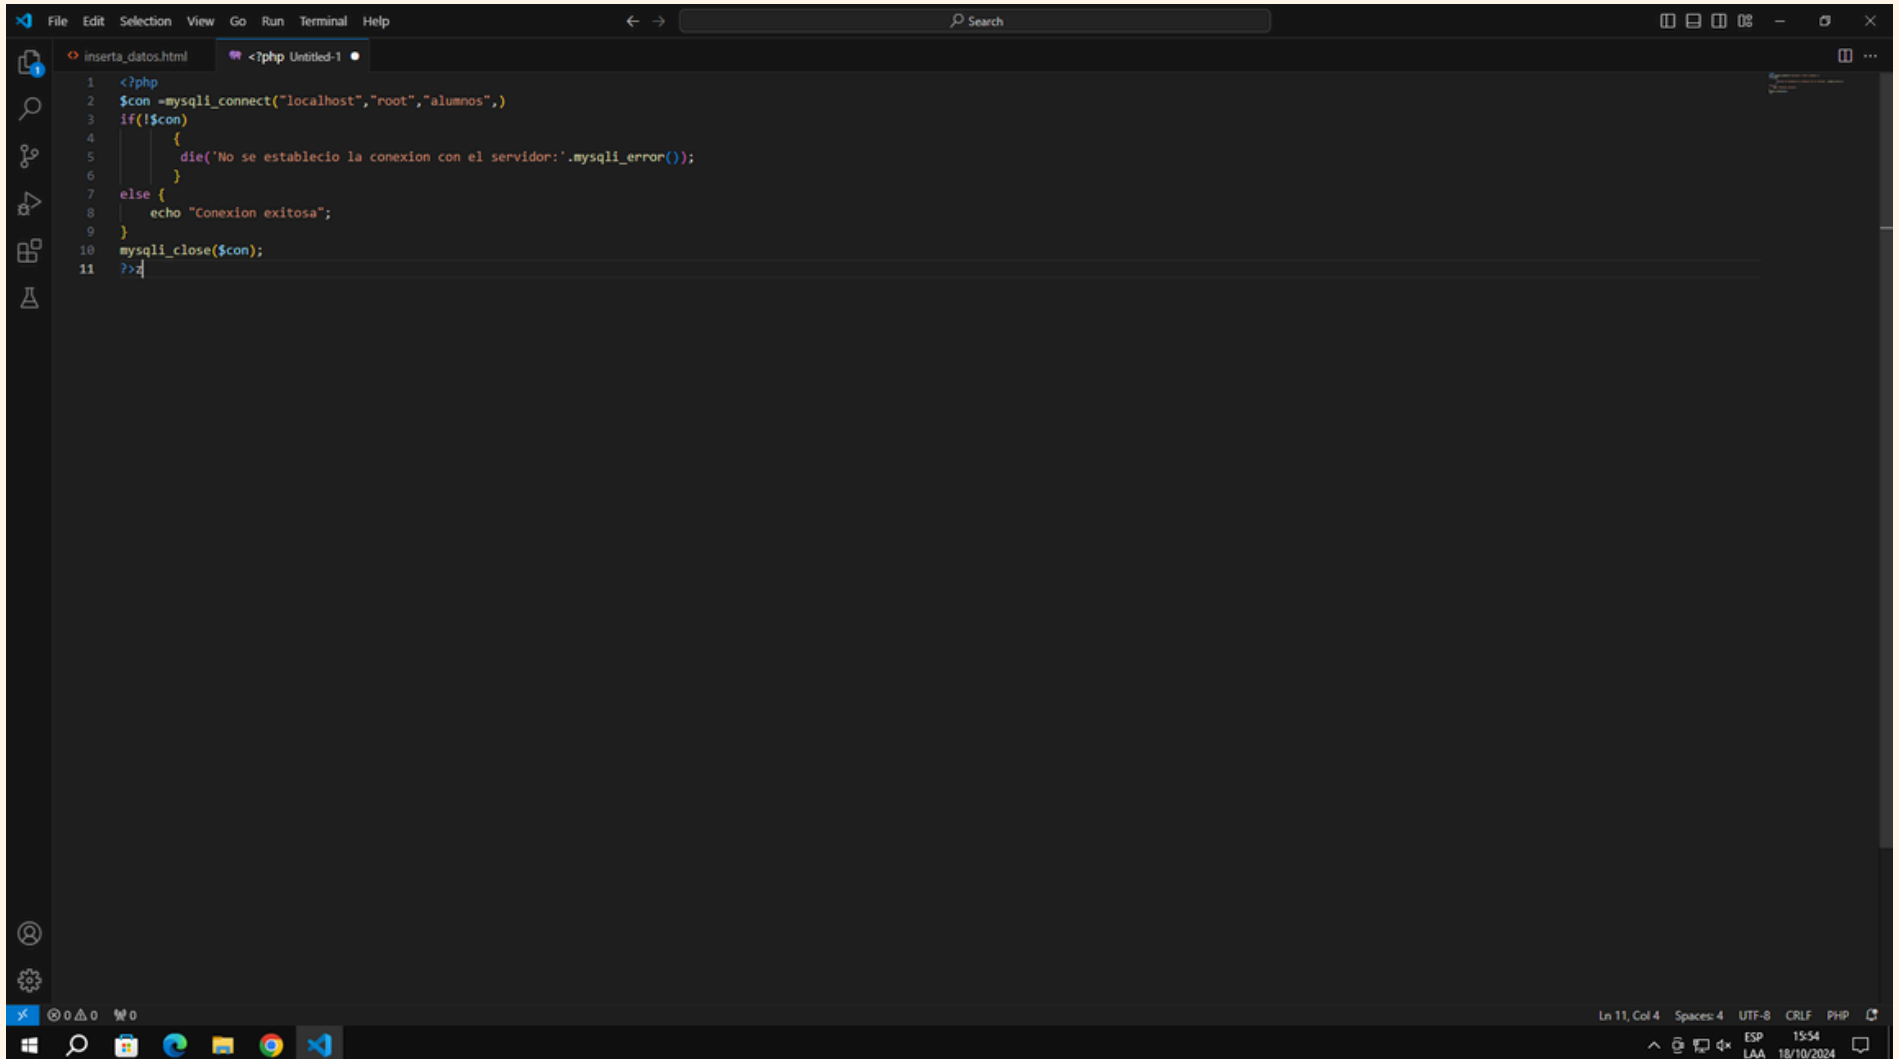


The image shows a screenshot of a code editor with a dark theme. The editor has a menu bar at the top with options: File, Edit, Selection, View, Go, Run, Terminal, and Help. Below the menu bar is a search bar. The left sidebar contains icons for Explorer, Search, Source Control, Run and Debug, and Testing. The main editor area displays a PHP file named 'Untitled-1' with the following code:

```
1 <?php
2 $con =mysqli_connect("localhost","root","alumnos",)
3 if(!$con)
4 {
5     die('No se establecio la conexion con el servidor:'.mysqli_error());
6 }
7 else {
8     echo "Conexion exitosa";
9 }
10 mysqli_close($con);
11 ?>
```

The status bar at the bottom right indicates the current position is Line 11, Column 4, with 4 spaces, UTF-8 encoding, CRLF line endings, and the file is a PHP script. The system tray at the bottom shows the Windows taskbar with icons for the Start menu, search, task view, and several open applications including Chrome and VS Code. The date and time are 18/10/2024 at 15:54.


ponemos el codigo de insertar datos php

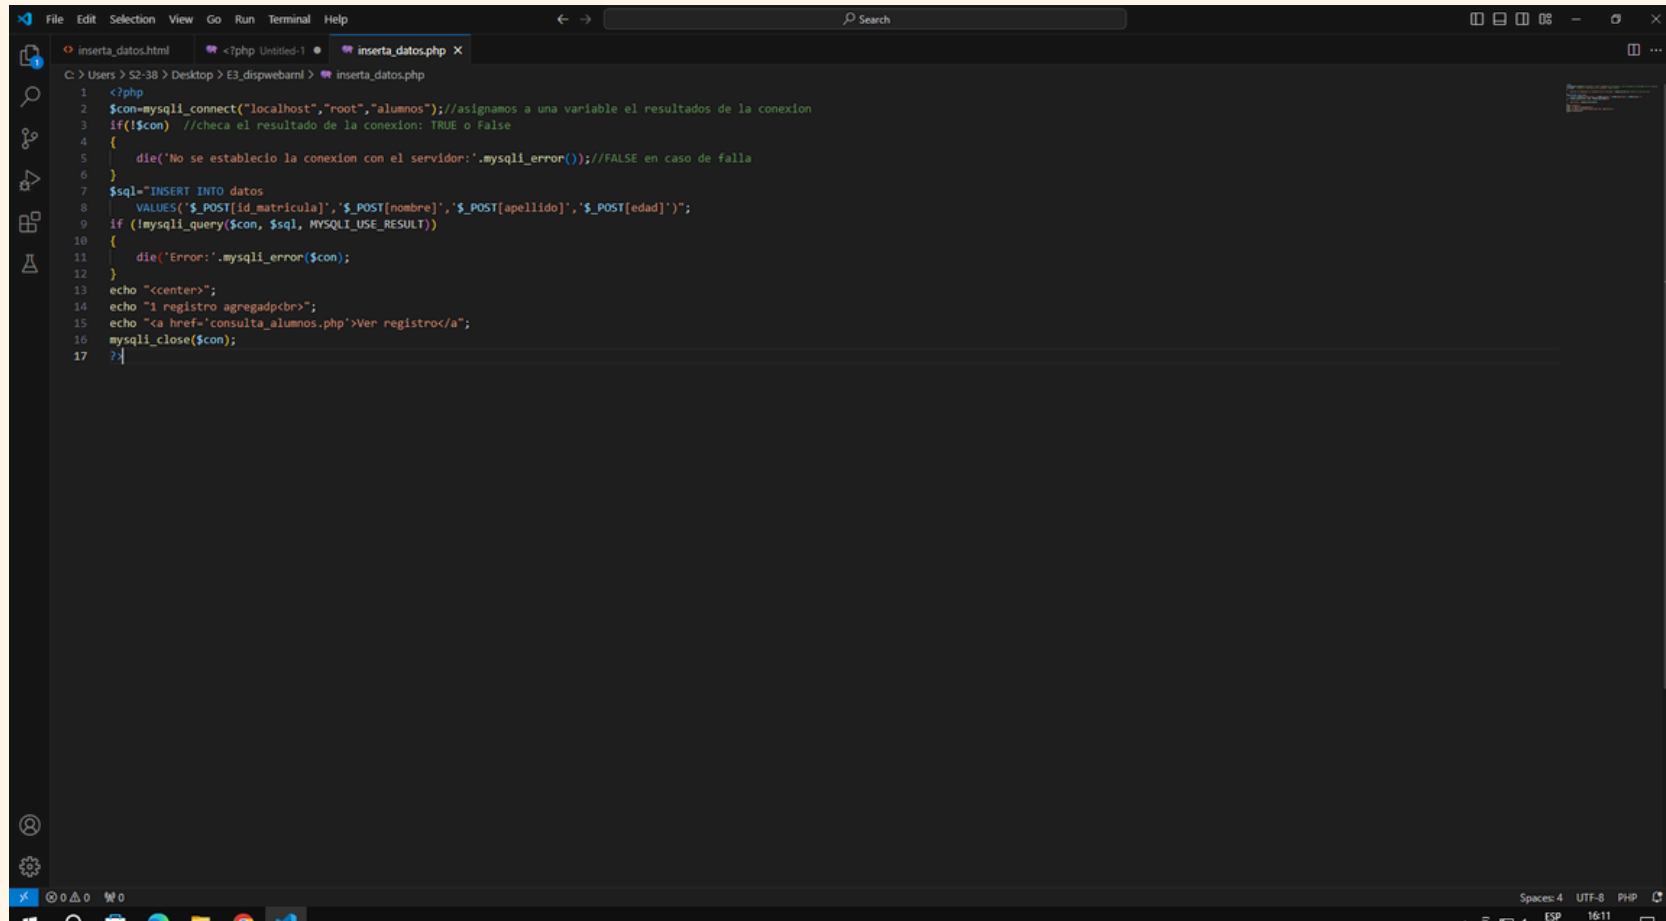


```
File Edit Selection View Go Run Terminal Help
inserta_datos.html <?php: Untitled-1 inserta_datos.php X
C:\Users\S2-38\Desktop\E3_dispwwebarni> inserta_datos.php
1 <?php
2 $con=mysqli_connect("localhost","root","alumnos");//asignamos a una variable el resultados de la conexion
3 if(!$con) //checa el resultado de la conexion: TRUE o False
4 {
5     die('No se establecio la conexion con el servidor:'.mysqli_error()); //FALSE en caso de falla
6 }
7 $sql="INSERT INTO datos
8     VALUES('$POST[id_matricula]','$POST[nombre]','$POST[apellido]','$POST[edad]')";
9 if (!mysqli_query($con, $sql, MYSQLI_USE_RESULT))
10 {
11     die('Error:'.mysqli_error($con);
12 }
13 echo "<center>";
14 echo "1 registro agregadpcbr>";
15 echo "<a href='consulta_alumnos.php'>Ver registro</a>";
16 mysqli_close($con);
17 >|
```

Spaces: 4 UTF-8 PHP  
ESP 16:11

tenemos el código de la consulta

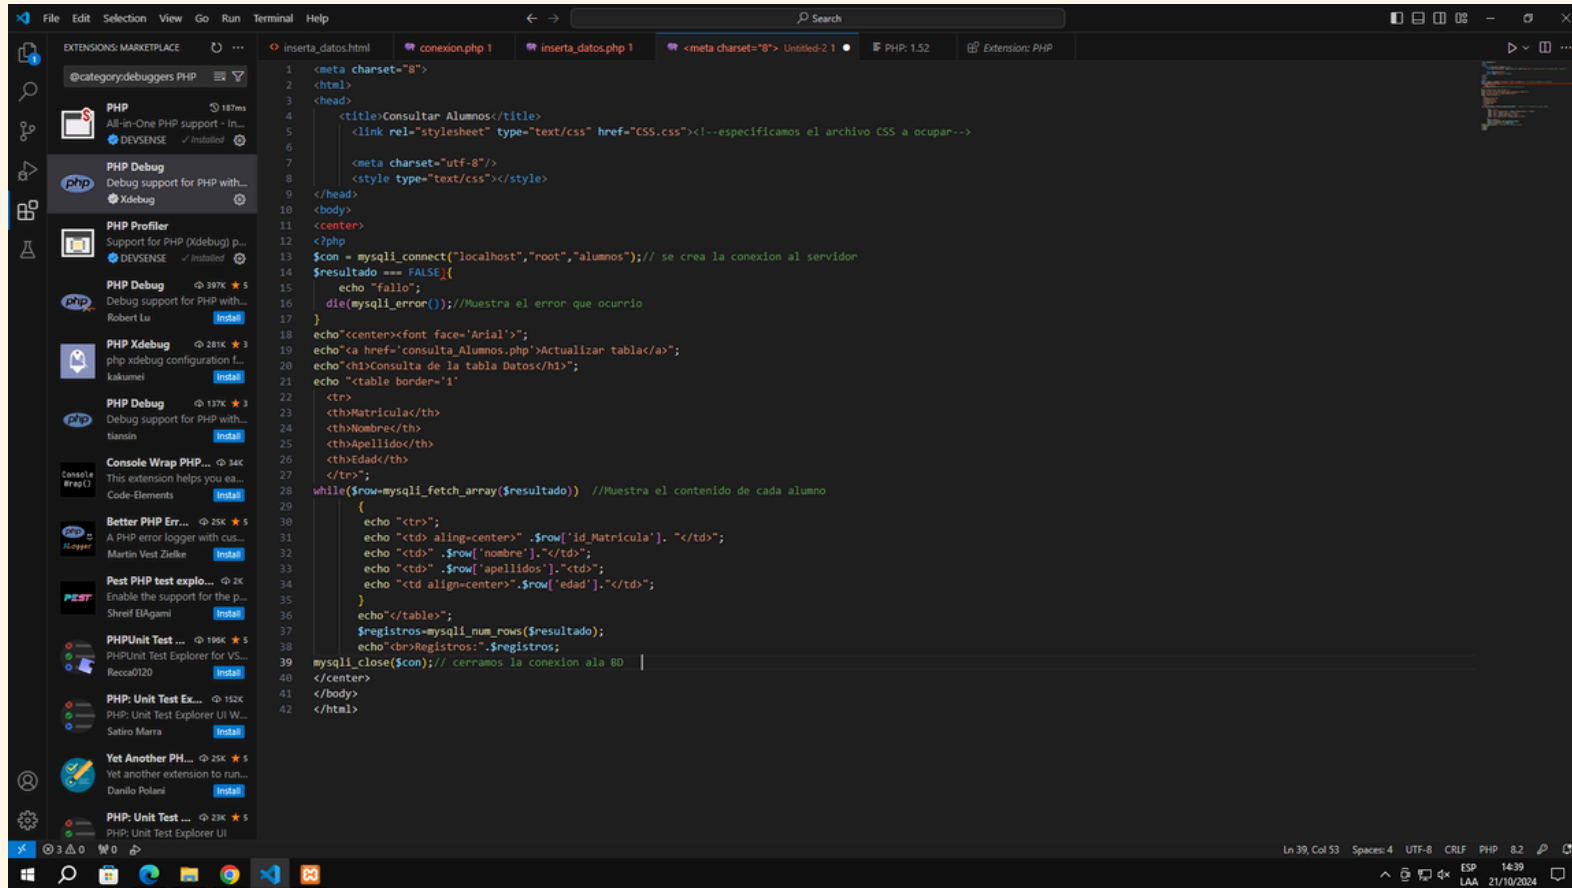

```
1 <meta charset="8">
2 <html>
3 <head>
4   <title>Consultar Alumnos</title>
5   <link rel="stylesheet" type="text/css" href="CSS.css"><!--especificamos el archivo CSS a ocupar-->
6
7   <meta charset="utf-8"/>
8   <style type="text/css"></style>
9 </head>
10 <body>
11 <center>
12 <?php
13 $con = mysqli_connect("localhost","root","alumnos");// se crea la conexion al servidor
14 $resultado = FALSE;
15 echo "fallo";
16 die(mysqli_error());//Muestra el error que ocurrio
17 }
18 echo "<center><font face='Arial'>";
19 echo "<a href='consulta_Alumnos.php'>Actualizar tabla</a>";
20 echo "<h1>Consulta de la tabla Datos</h1>";
21 echo "<table border='1'>
22 <tr>
23 <th>Matricula</th>
24 <th>Nombre</th>
25 <th>Apellido</th>
26 <th>Edad</th>
27 </tr>";
28 while($row=mysqli_fetch_array($resultado)) //Muestra el contenido de cada alumno
29 {
30   echo "<tr>";
31   echo "<td align='center'>".$row['id_Matricula']. "</td>";
32   echo "<td>".$row['nombre']. "</td>";
33   echo "<td>".$row['apellidos']. "</td>";
34   echo "<td align='center'>".$row['edad']. "</td>";
35 }
36 echo "</table>";
37 $registros=mysqli_num_rows($resultado);
38 echo "<br>Registros: ".$registros;
39 mysqli_close($con);// cerramos la conexion ala BD
40 </center>
41 </body>
42 </html>
```



aqui la conexion php

The screenshot shows the phpMyAdmin web interface. The browser address bar displays the URL: `localhost/phpmyadmin/index.php?route=/sql&db=tienda+digital+fashions+basv&table=clientes&pos=0`. The interface includes a sidebar with a database tree on the left and a main content area on the right. The main area shows the 'clientes' table structure and a list of 8 rows. A green status bar at the top of the main area indicates: 'Mostrando filas 0 - 7 (total de 8, La consulta tardó 0,0003 segundos.)'. Below this, the SQL query `SELECT * FROM `clientes`` is displayed. The table has columns: IDcliente, Nombre, Apellido, Numtelefono, and Ciudad. The data rows are as follows:

IDcliente	Nombre	Apellido	Numtelefono	Ciudad
1	Gael	Gutiérrez	85006549	Guadalupe
2	Ana	Pérez	87525256	Monterrey
3	Luis	Gómez	89626244	Juarez
4	Marta	López	81534322	Apodaca
5	Juan	Torres	80928344	San Pedro
6	Karla	Ruiz	84726322	Pesquería
7	Pedro	Martínez	87212199	García
8	Laura	Sánchez	83440972	Escobedo



agregamos todo ala carpeta htdocs

